


Please refer to following diagram for individual

Below 1GHz


Horizontal:

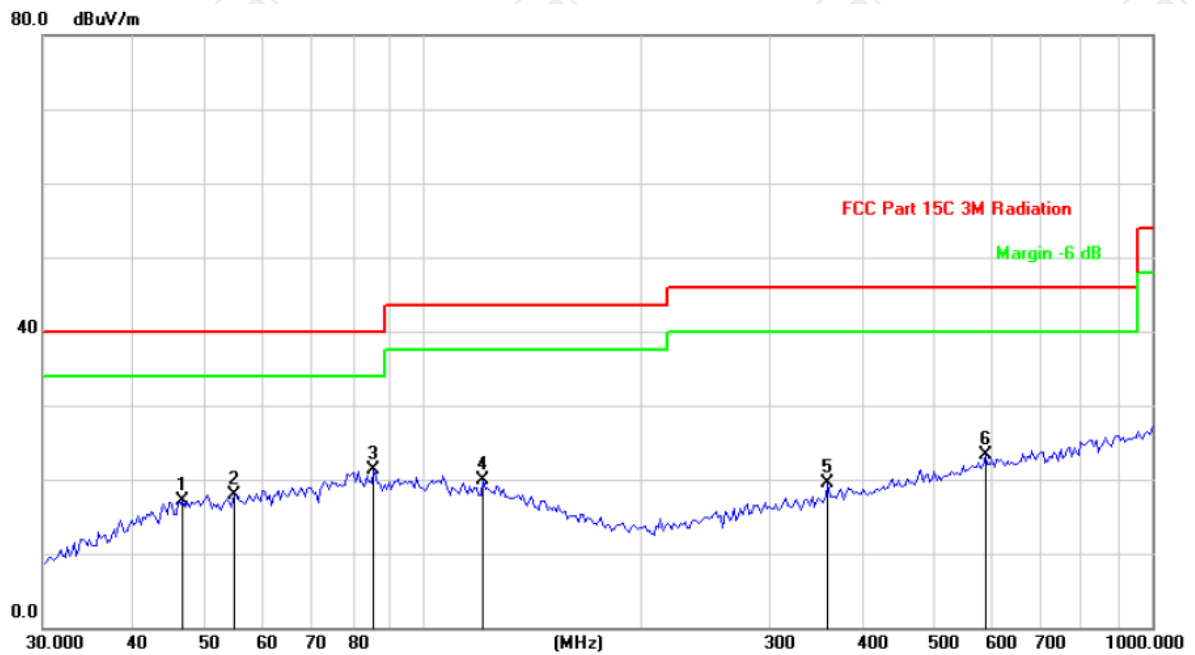

Site: Polarization: *Horizontal* Temperature: 25
 Limit: FCC Part 15C 3M Radiation Power: DC 3.7V Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.7077	27.53	-10.35	17.18	40.00	-22.82	peak
2		54.9011	29.08	-11.17	17.91	40.00	-22.09	peak
3	*	85.4769	34.66	-13.26	21.40	40.00	-18.60	peak
4		120.6118	31.77	-11.78	19.99	43.50	-23.51	peak
5		358.4497	29.06	-9.56	19.50	46.00	-26.50	peak
6		590.3511	29.30	-6.02	23.28	46.00	-22.72	peak

Vertical:

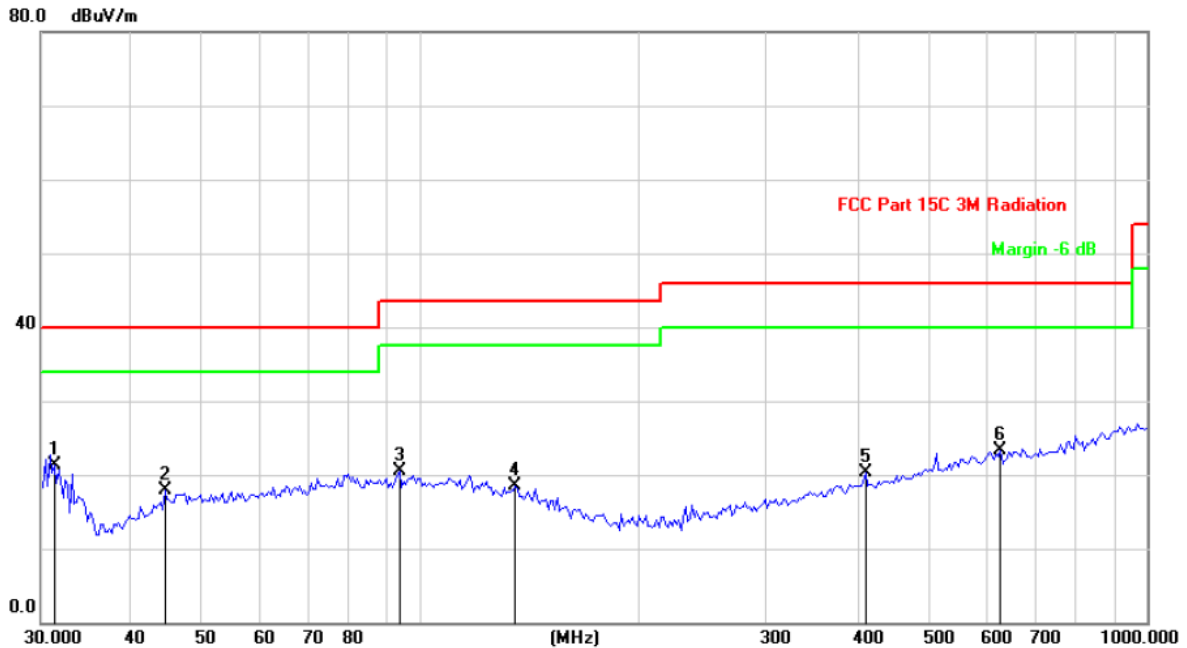

Site: Polarization: **Vertical** Temperature: 25
 Limit: FCC Part 15C 3M Radiation Power: DC 3.7V Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	31.2919	32.22	-11.00	21.22	40.00	-18.78	peak
2		44.4657	28.50	-10.58	17.92	40.00	-22.08	peak
3		93.6532	30.02	-9.52	20.50	43.50	-23.00	peak
4		134.9645	34.26	-15.75	18.51	43.50	-24.99	peak
5		409.6506	29.13	-8.83	20.30	46.00	-25.70	peak
6		628.8936	29.05	-5.67	23.38	46.00	-22.62	peak

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK, 8DPSK) and the worst case Mode (Middle channel and GFSK) was submitted only.

3. Freq. = Emission frequency in MHz

Measurement (dBuV/m) = Reading level (dBuV) + Corr. Factor (dB)

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Measurement (dBuV/m) – Limits (dBuV/m)


Any value more than 10dB below limit have not been specifically reported

* is meaning the worst frequency has been tested in the test frequency range

Test Result of Radiated Spurious at Band edges


Lowest channel 2402:

Horizontal:

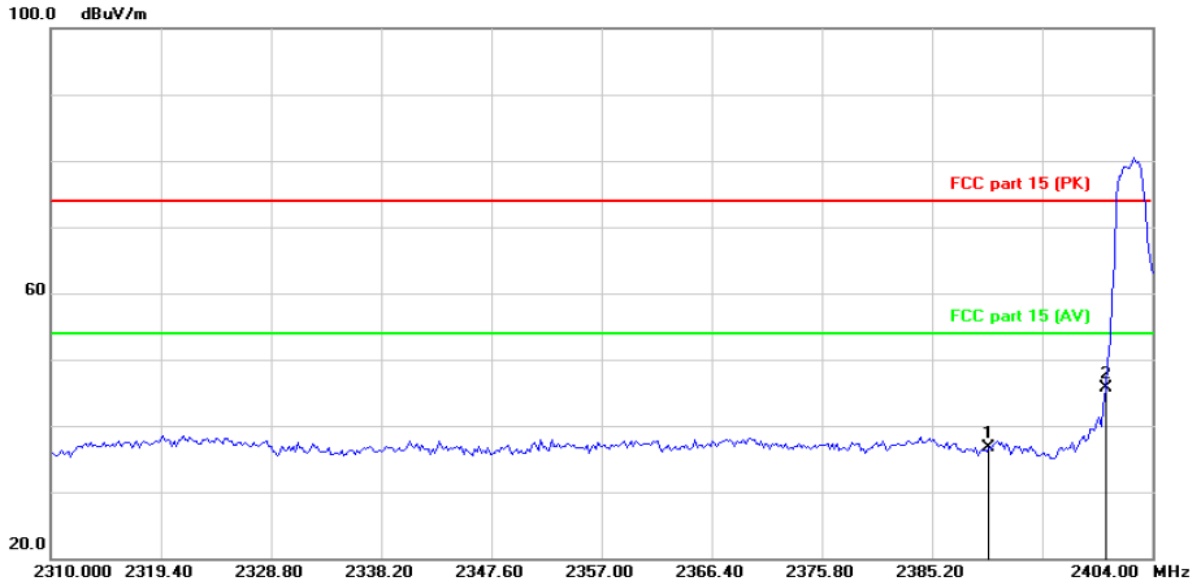

Site: Limit: FCC part 15 (PK) Polarization: **Horizontal** Temperature: 25
Power: Humidity: 55 %

Vertical:

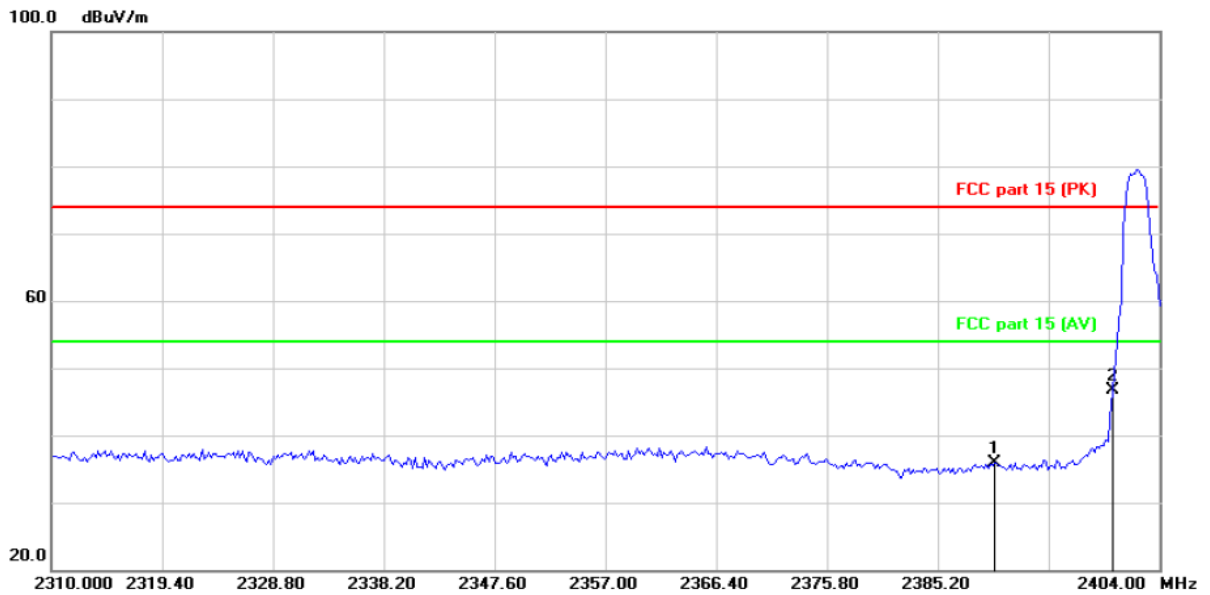


Site: Limit: FCC part 15 (PK) Polarization: **Vertical** Temperature: 25
Power: Humidity: 55 %

Frequency (MHz)	Ant. Pol. H/V	Peak (dB μ V/m)	Duty cycle factor (dB/m)	AV (dB μ V/m)	Peak limit (dB μ V/m)	AV limit (dB μ V/m)	PK Margin (dB)	AVG Margin (dB)
2390	H	36.77	-2.10	34.67	74	54	-37.23	-19.33
2390	V	35.89	-2.10	33.79	74	54	-38.11	-20.21
2400	H	45.80	-2.10	43.70	74	54	-28.20	-10.30
2400	V	46.69	-2.10	44.59	74	54	-27.31	-9.41

Highest channel 2480:

Horizontal:

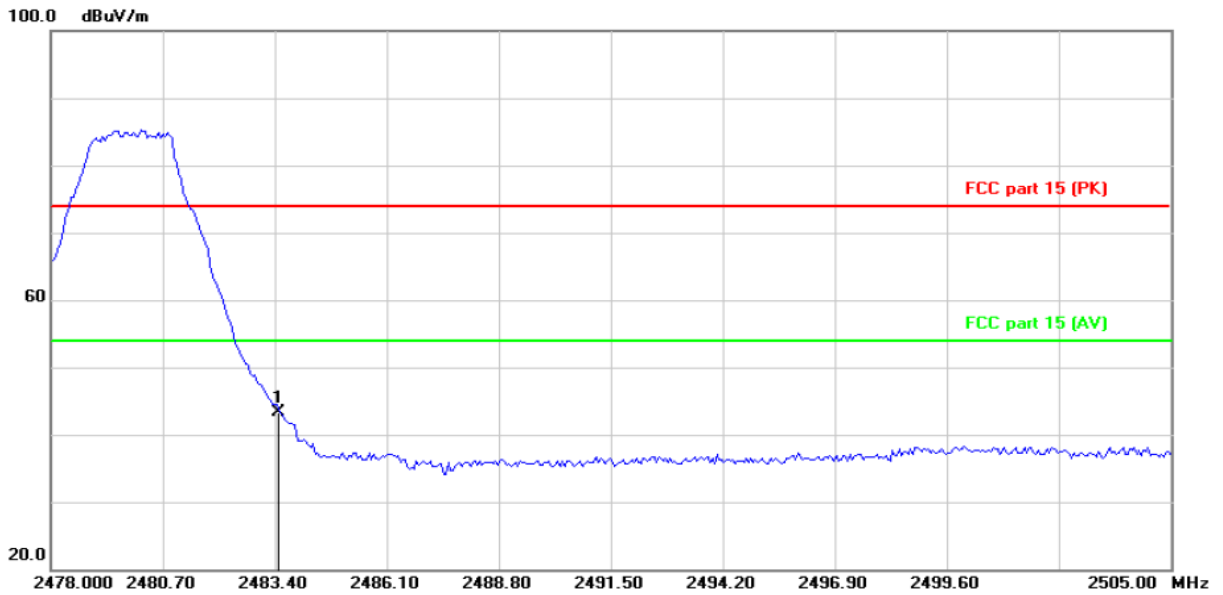


Site
Limit: FCC part 15 (PK)

Polarization: **Horizontal**
Power:

Temperature: 25
Humidity: 55 %

Vertical:

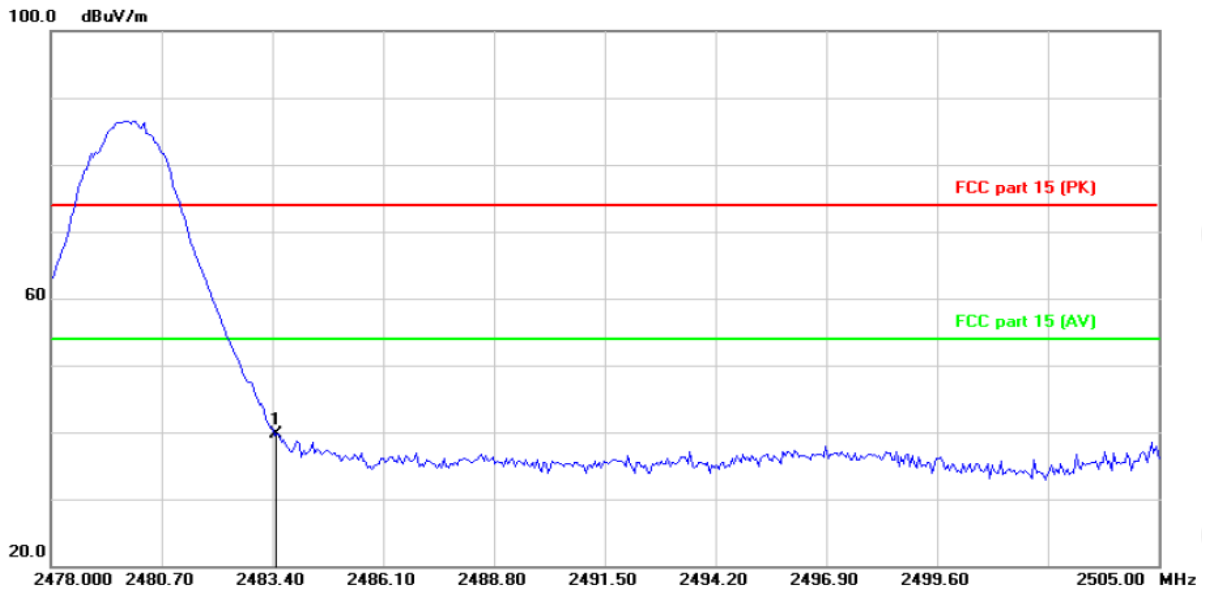

Site
Limit: FCC part 15 (PK)

Polarization: **Vertical**
Power:

Temperature: 25
Humidity: 55 %

Frequency (MHz)	Ant. Pol. H/V	Peak (dB μ V/m)	Duty cycle factor (dB/m)	AV (dB μ V/m)	Peak limit (dB μ V/m)	AV limit (dB μ V/m)	PK Margin (dB)	AVG Margin (dB)
2483.5	H	43.35	-2.10	41.25	74	54	-30.65	-12.75
2483.5	V	39.69	-2.10	37.59	74	54	-34.31	-16.41

Note: Measurements were conducted in all three modulation (GFSK, Pi/4DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.

Above 1GHz

Modulation Type: GFSK									
Low channel: 2402 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4804	H	45.09	---	0.66	45.75	---	74	54	-8.25
7206	H	34.39	---	9.50	43.89	---	74	54	-10.11
---	H	---	---	---	---	---	---	---	---
4804	V	43.15	---	0.66	43.81	---	74	54	-10.19
7206	V	33.72	---	9.50	43.22	---	74	54	-10.78
---	V	---	---	---	---	---	---	---	---

Middle channel: 2441 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4882	H	44.64	---	0.99	45.63	---	74	54	-8.37
7323	H	33.36	---	9.87	43.23	---	74	54	-10.77
---	H	---	---	---	---	---	---	---	---
4882	V	42.60	---	0.99	43.59	---	74	54	-10.41
7323	V	34.10	---	9.87	43.97	---	74	54	-10.03
---	V	---	---	---	---	---	---	---	---

High channel: 2480 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4960	H	45.46	---	1.33	46.79	---	74	54	-7.21
7440	H	35.17	---	10.22	45.39	---	74	54	-8.61
---	H	---	---	---	---	---	---	---	---
4960	V	45.76	---	1.33	47.09	---	74	54	-6.91
7440	V	35.41	---	10.22	45.63	---	74	54	-8.37
---	V	---	---	---	---	---	---	---	---

Note:



1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
7. All the restriction bands are compliance with the limit of 15.209.

Appendix A: Photographs of Test Setup


Product: Bluetooth earphone

Model: AG-TWS04K

Radiated Emission

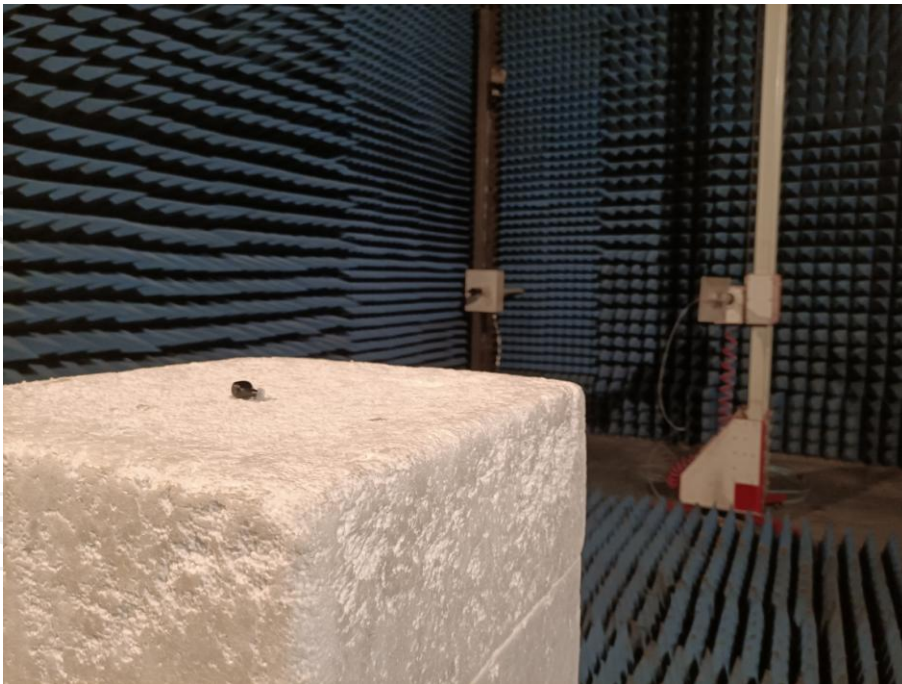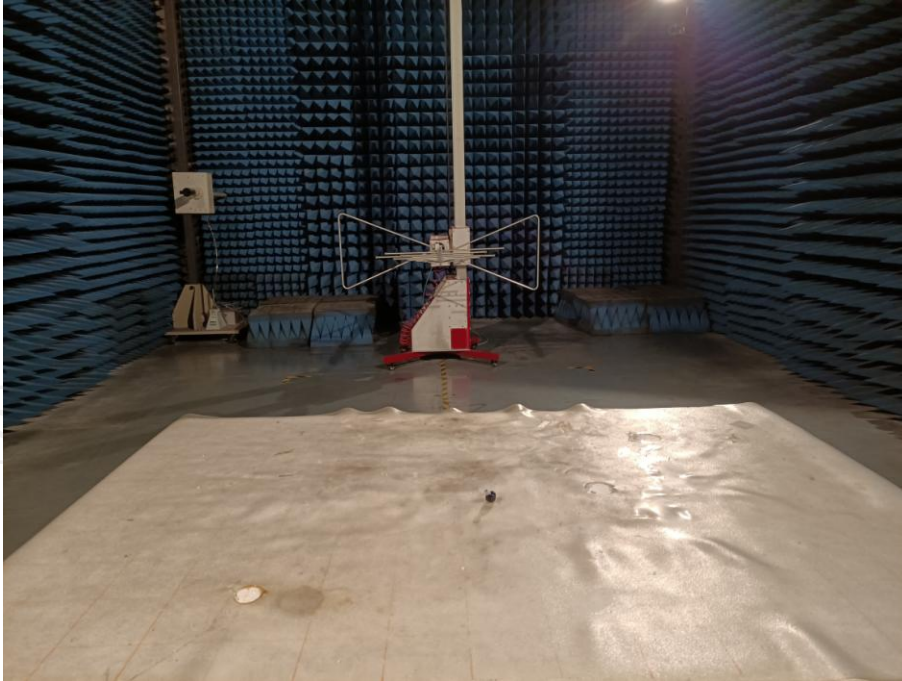




Conducted Emission

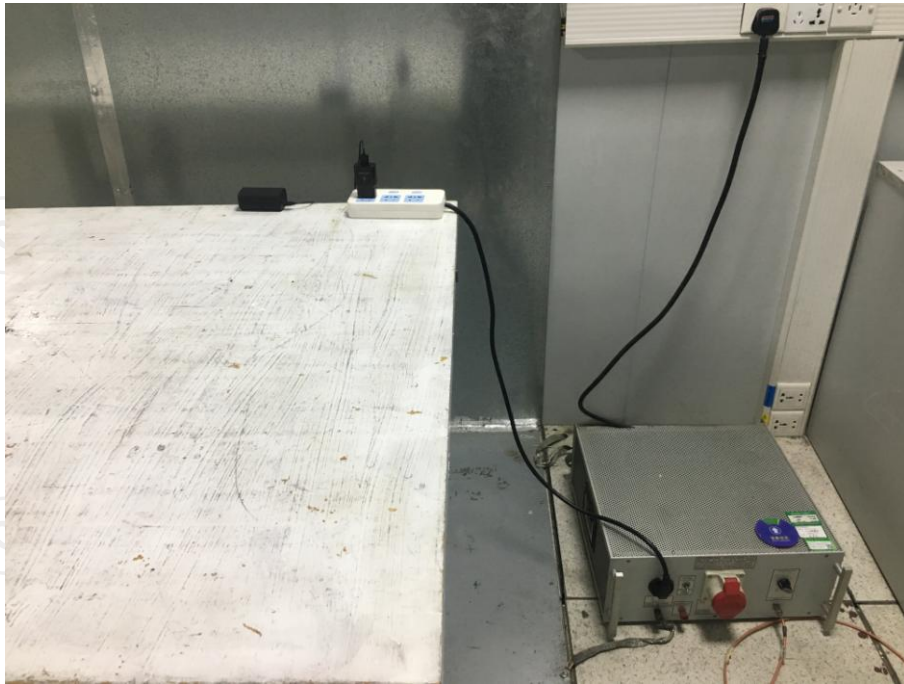



Appendix B: Photographs of EUT
Product: Bluetooth earphone
Model: AG-TWS04K
External Photos



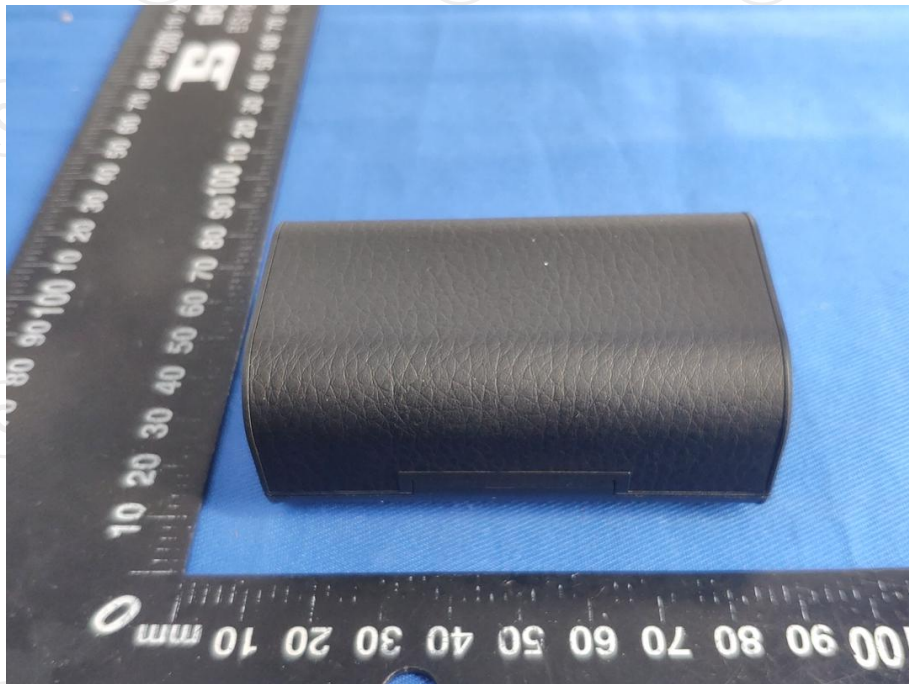


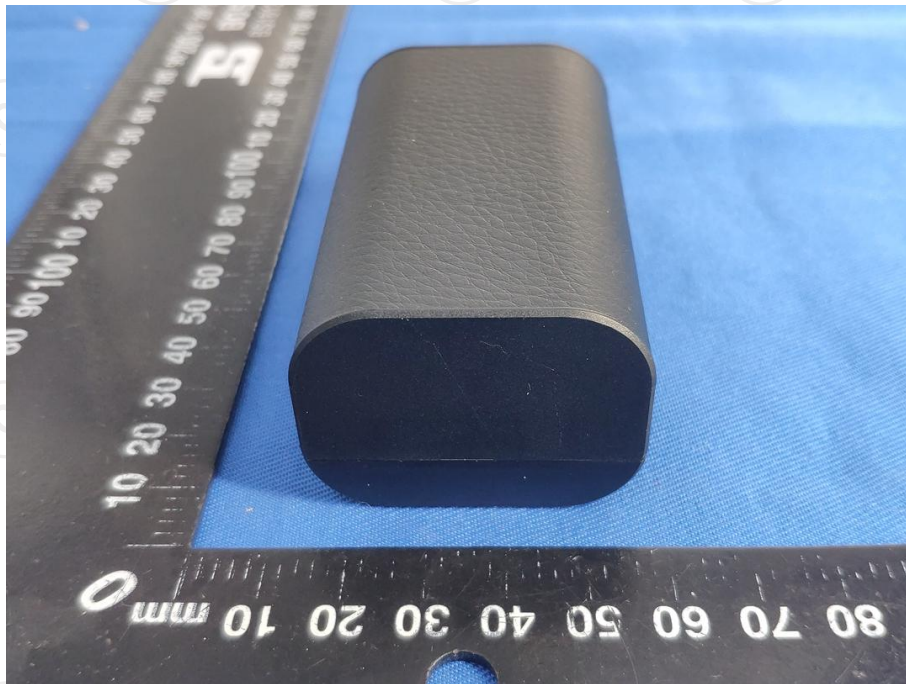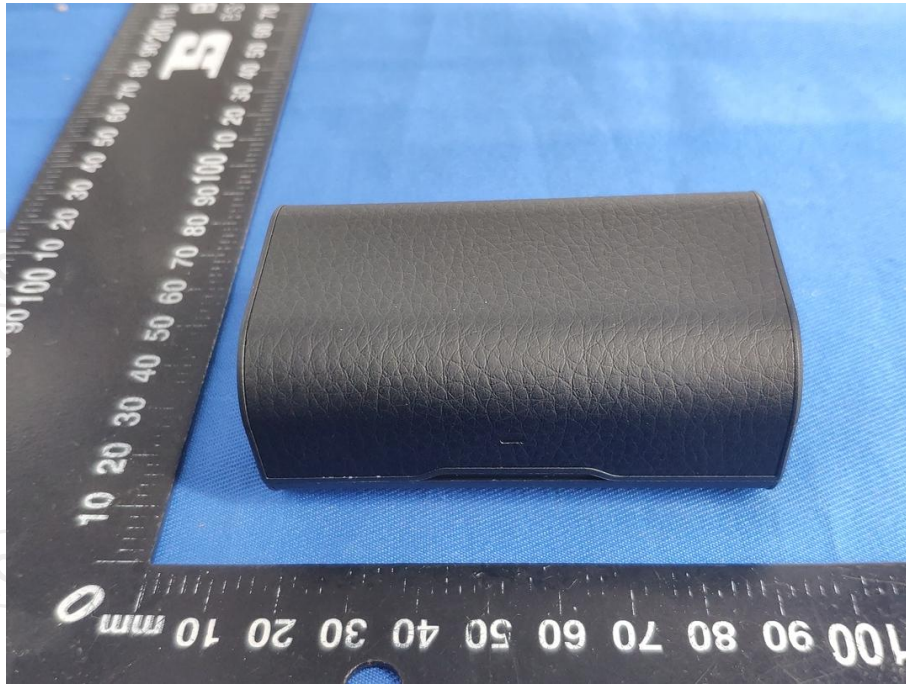


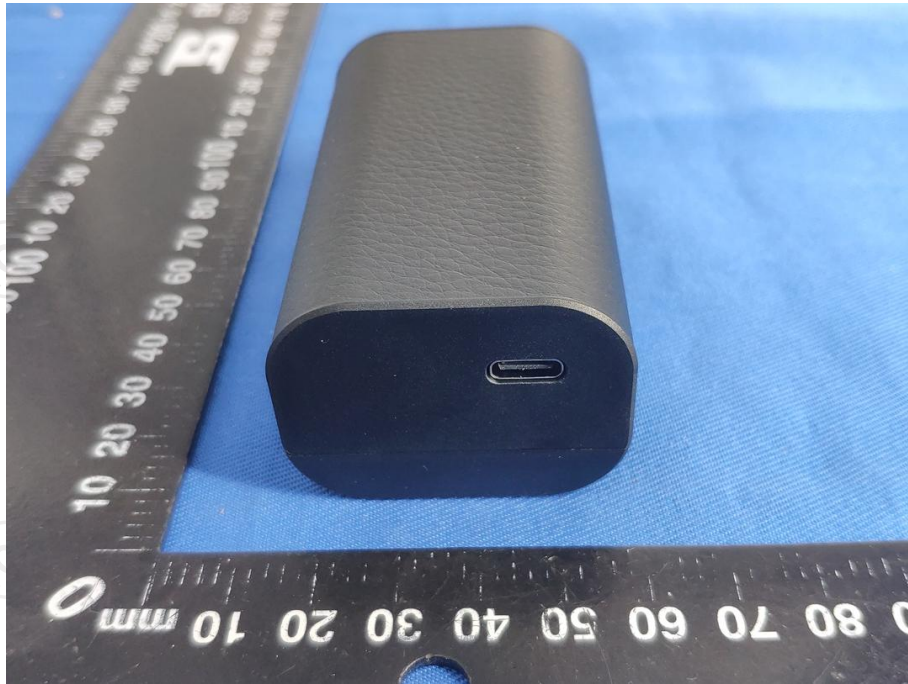



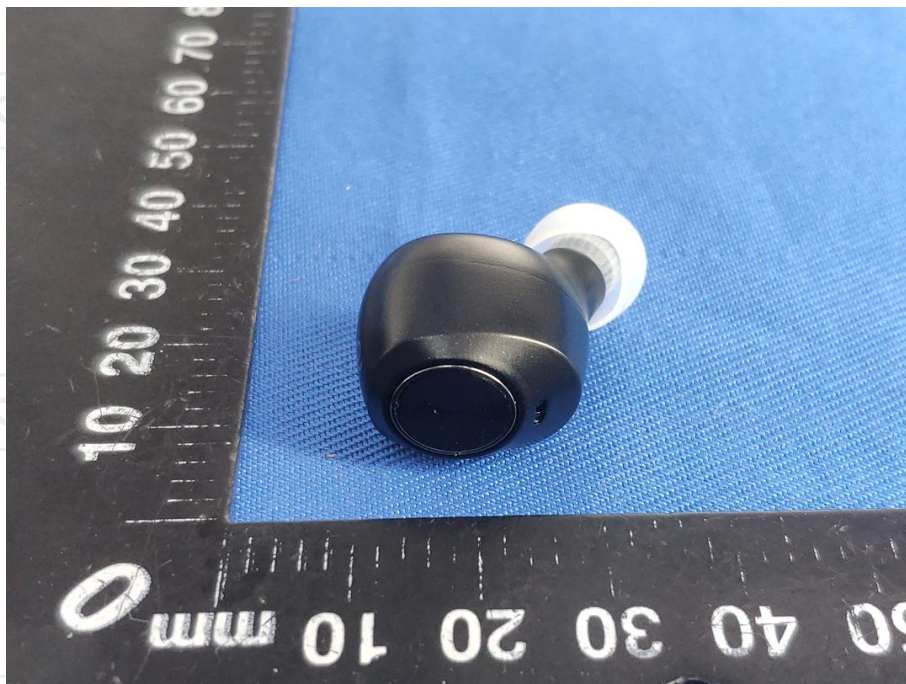





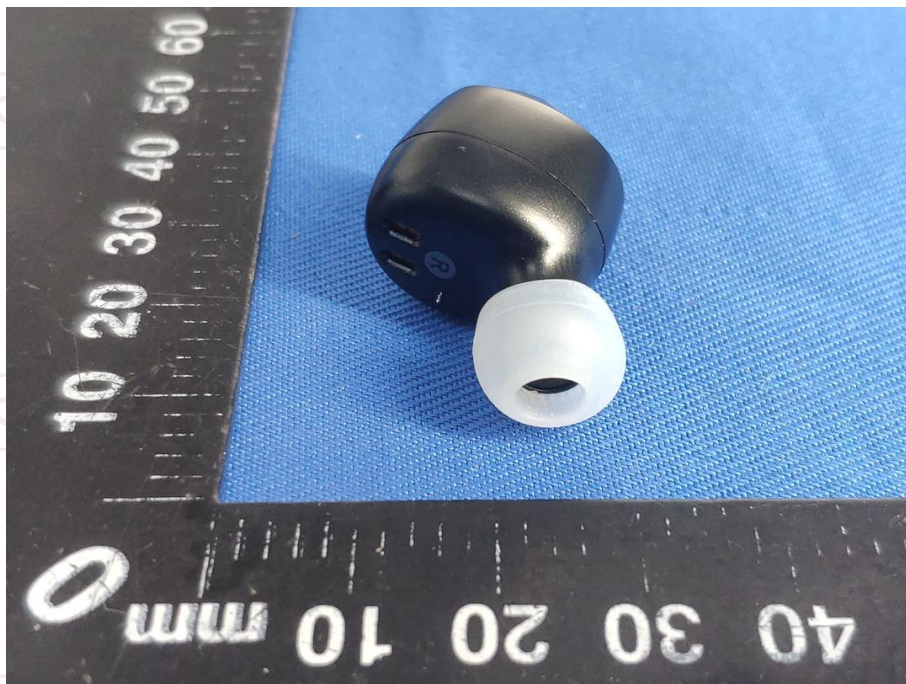



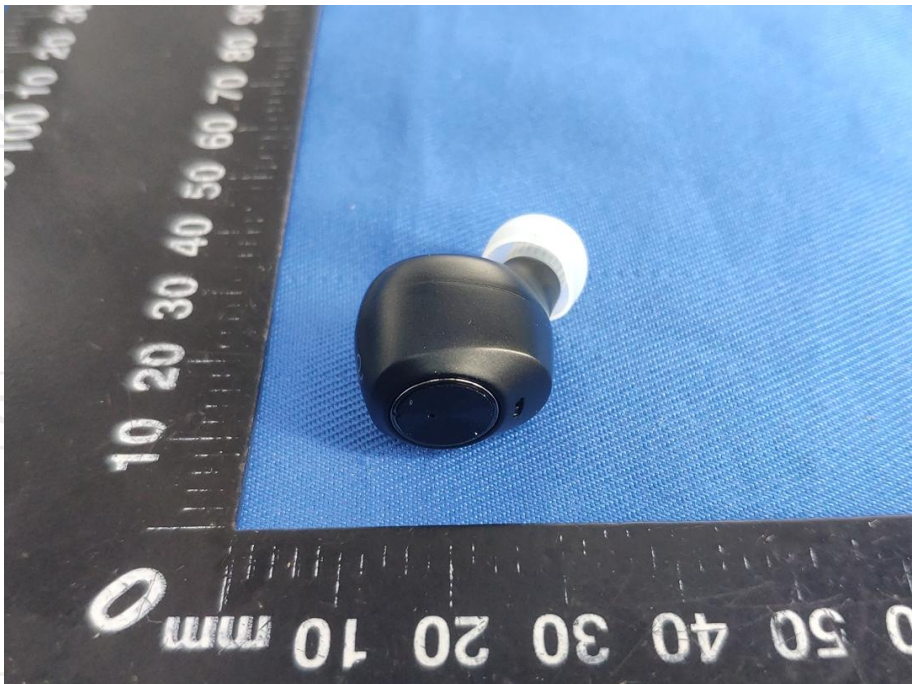



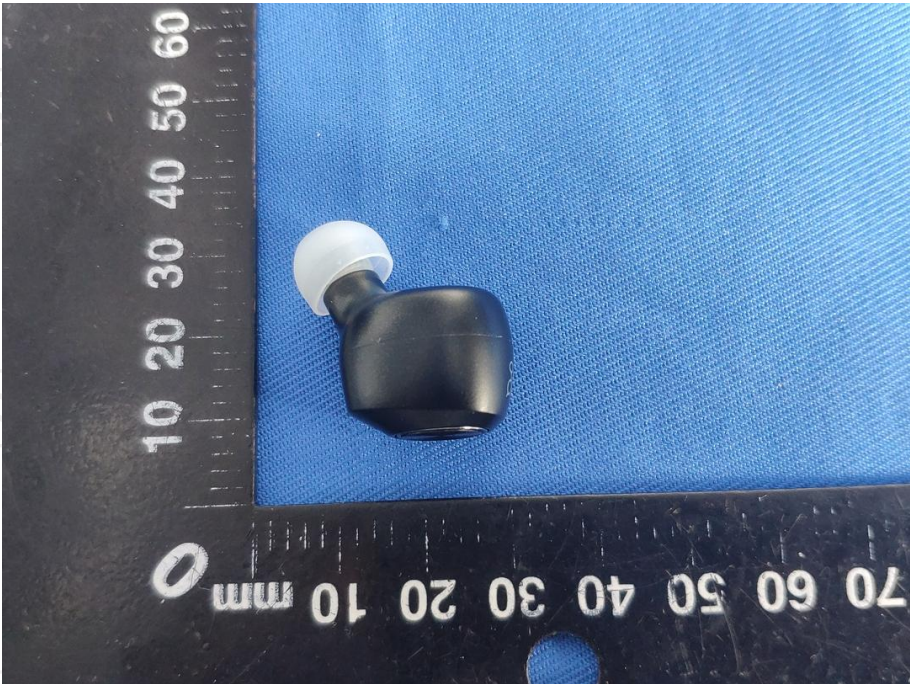


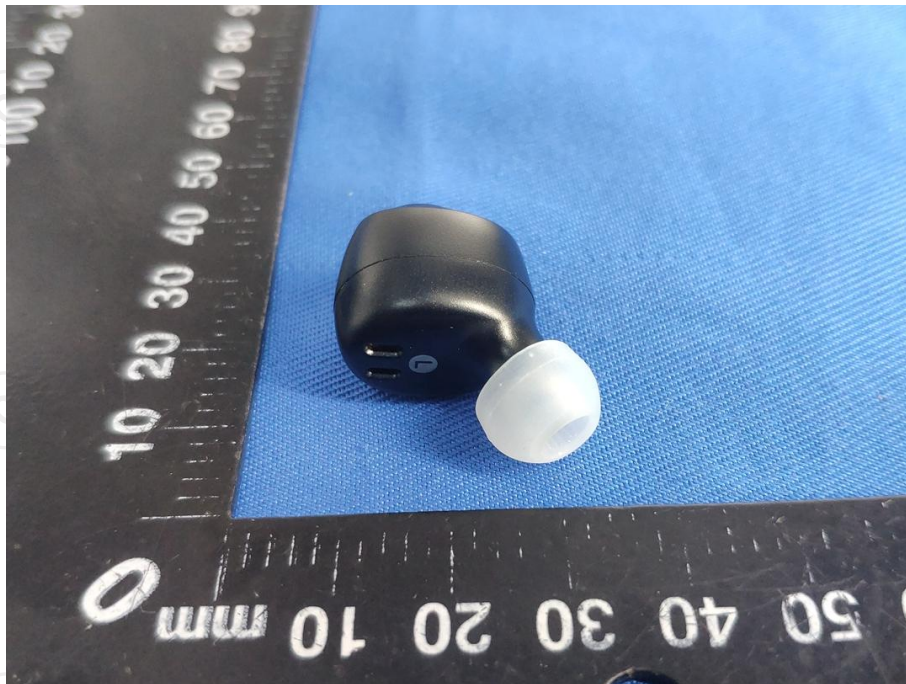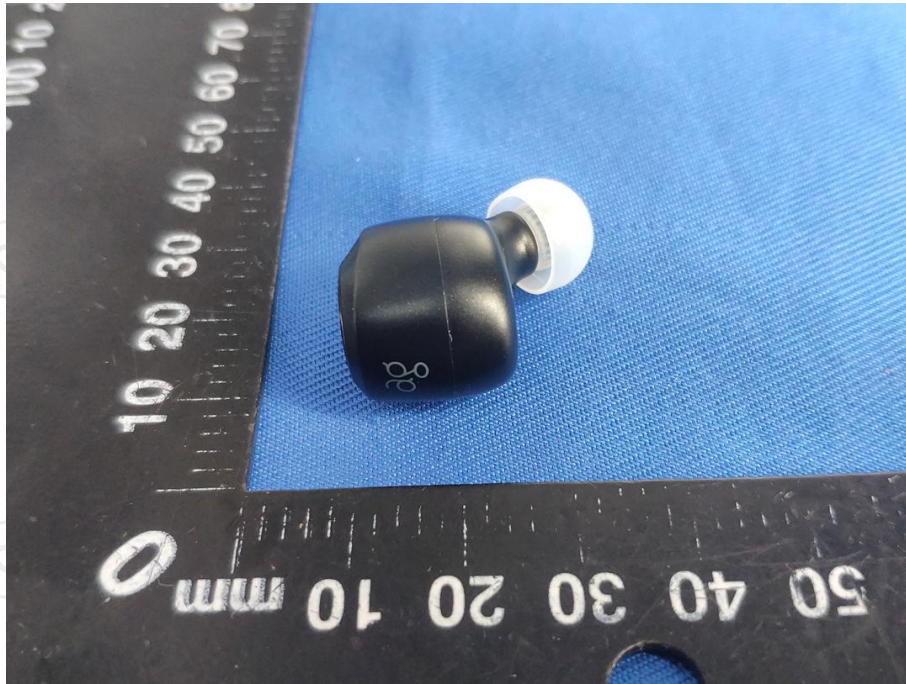




Product: Bluetooth earphone
Model: AG-TWS04K
Internal Photos

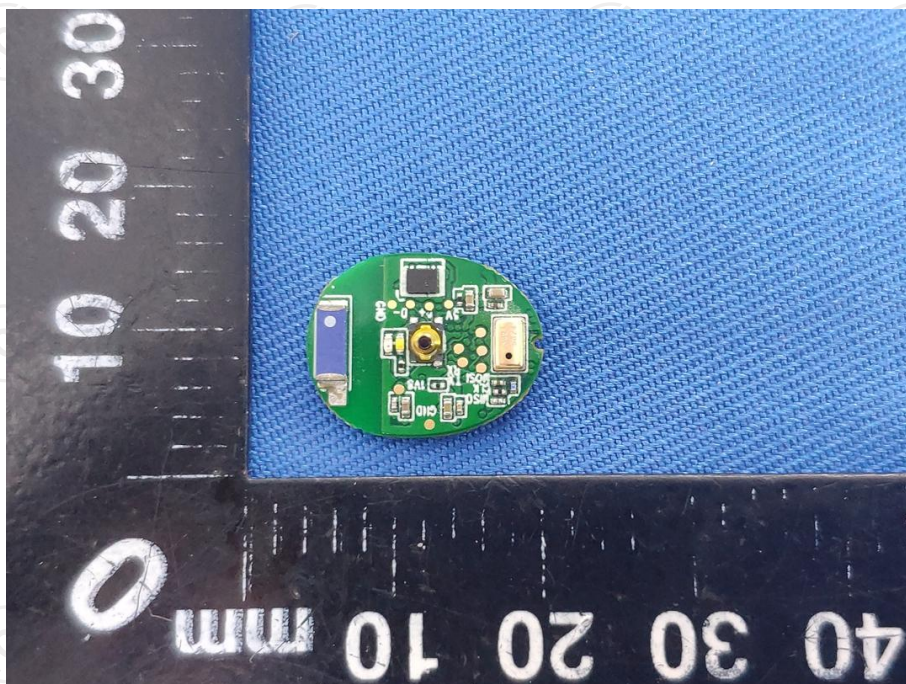
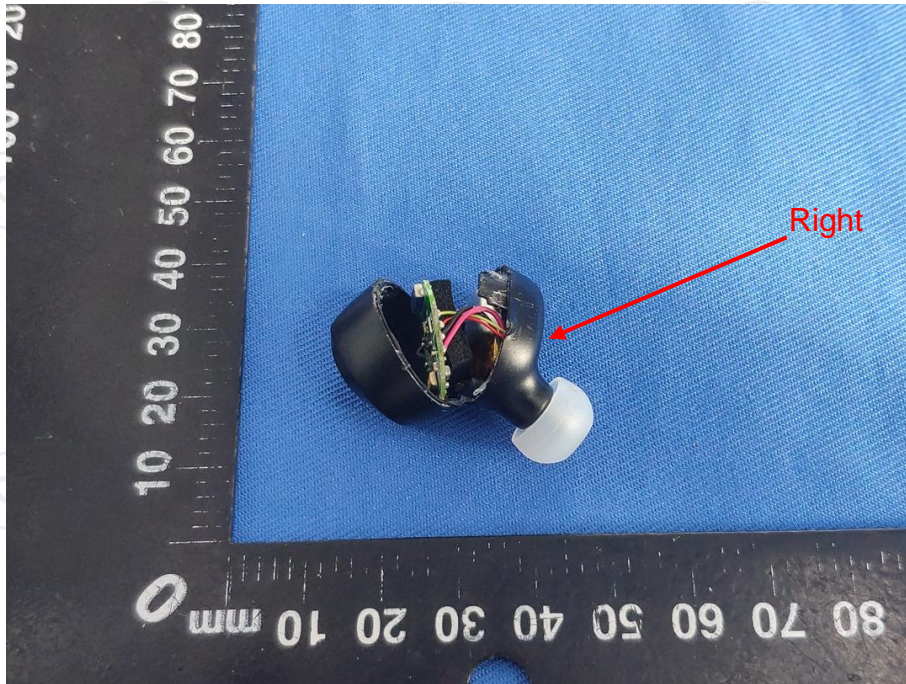


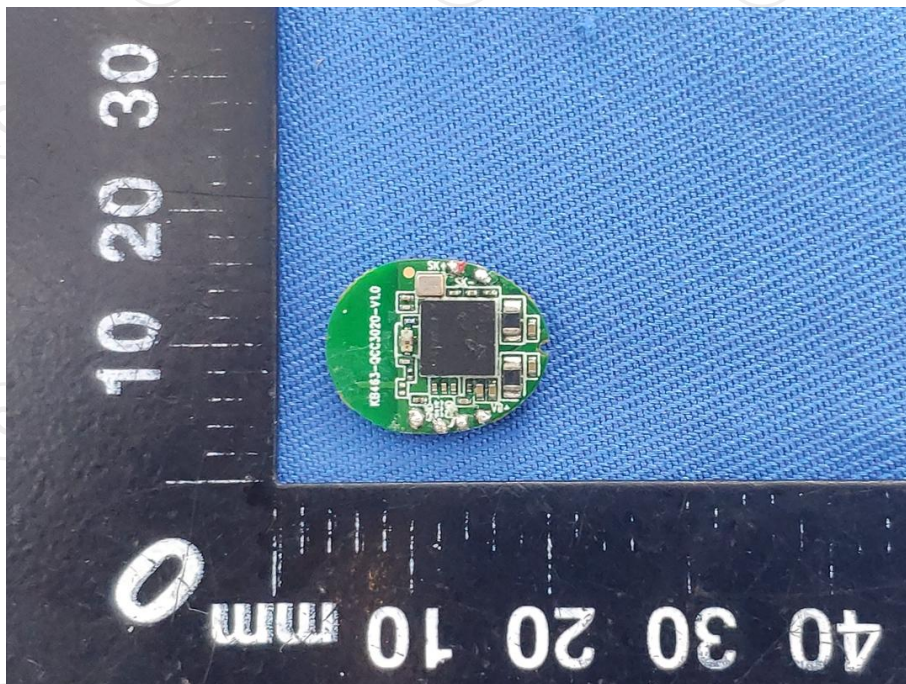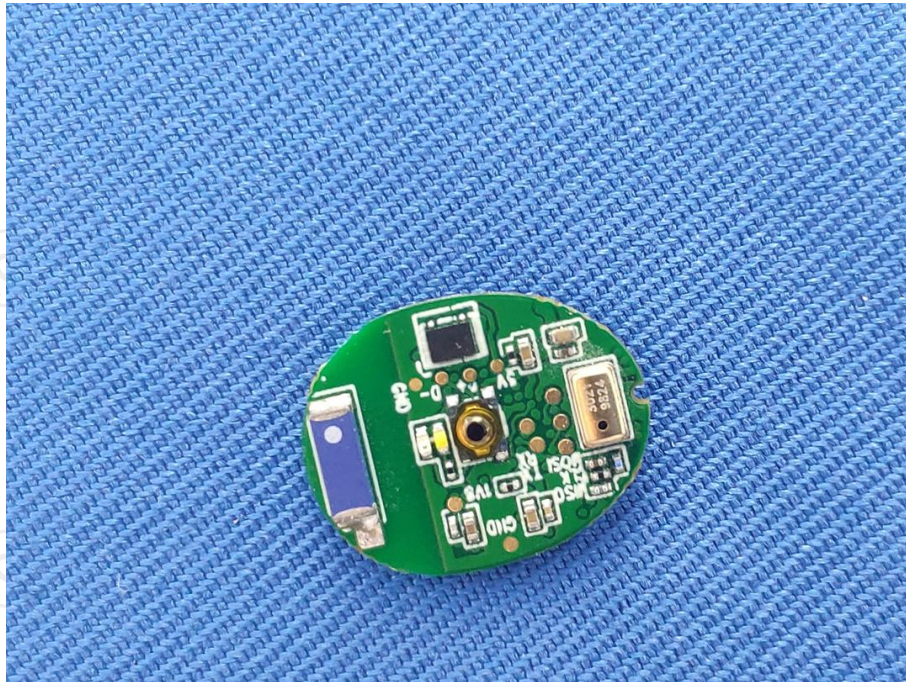


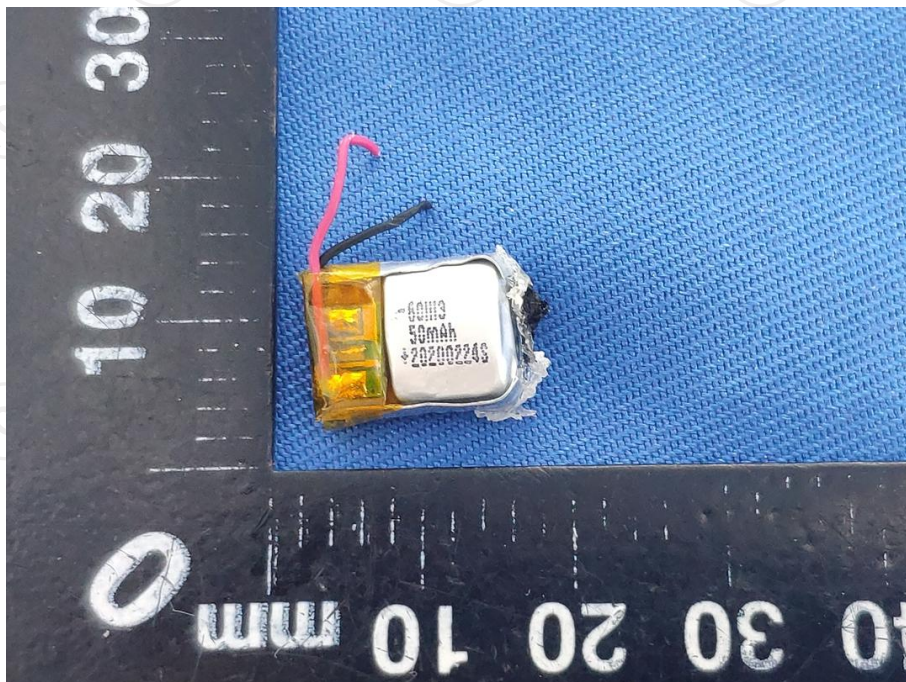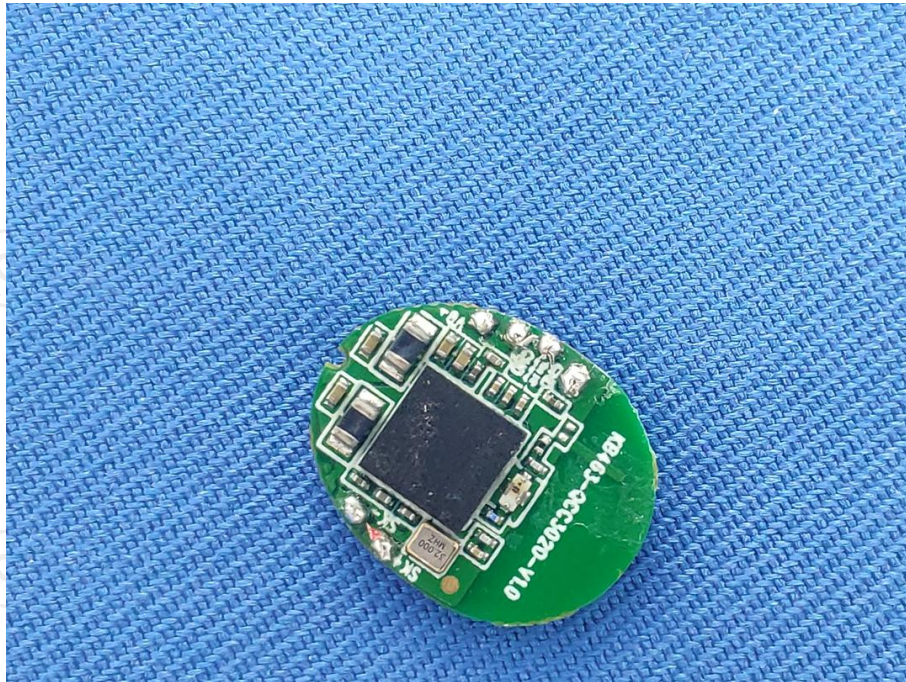

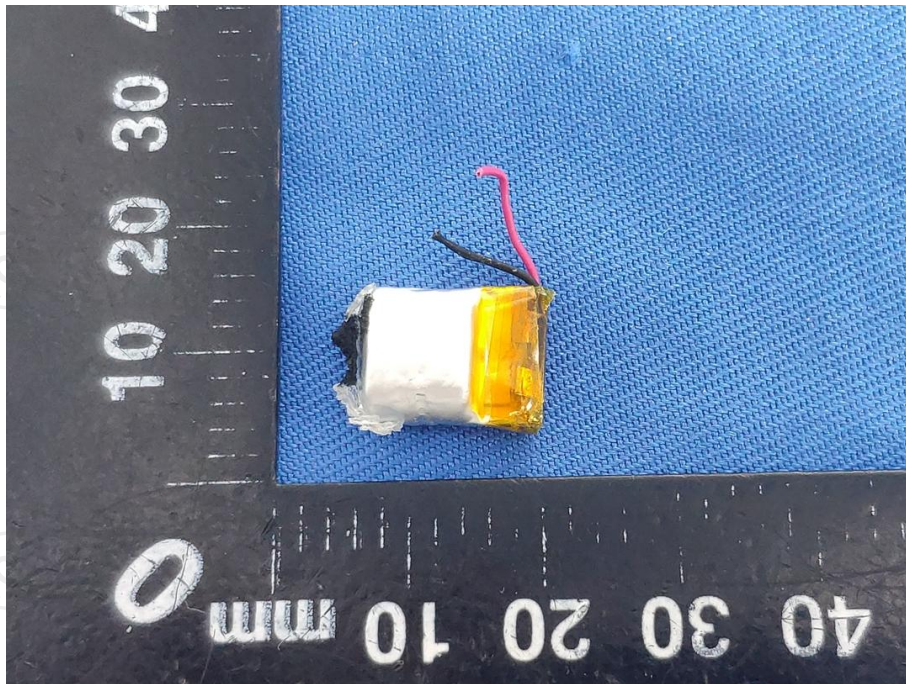

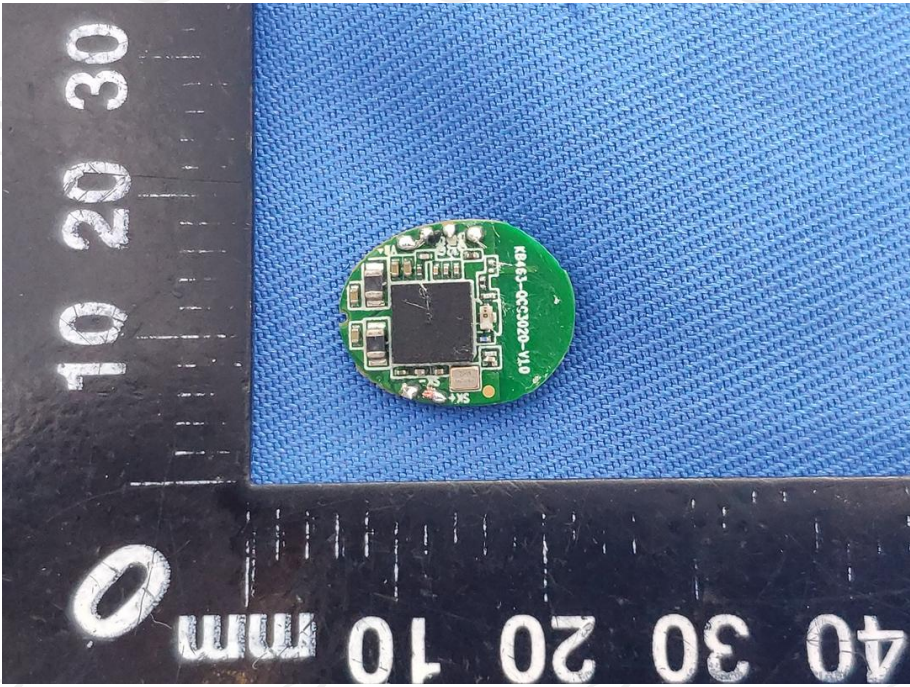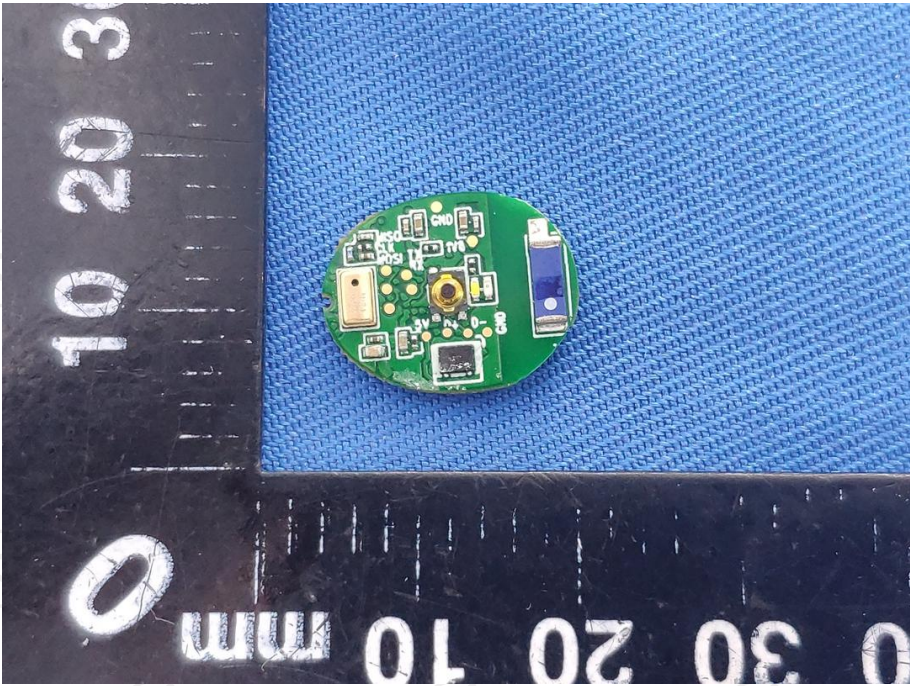

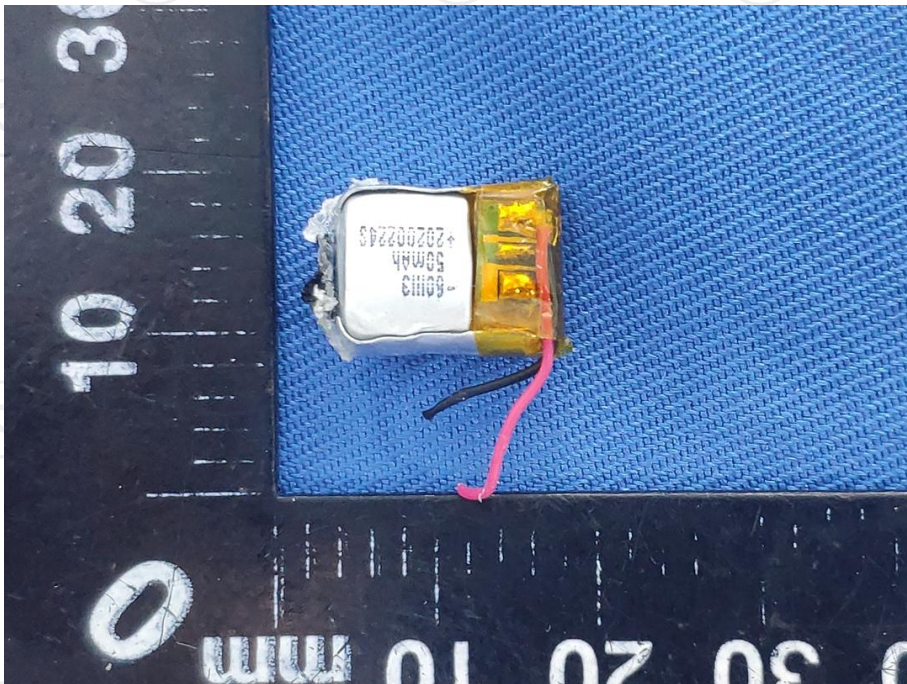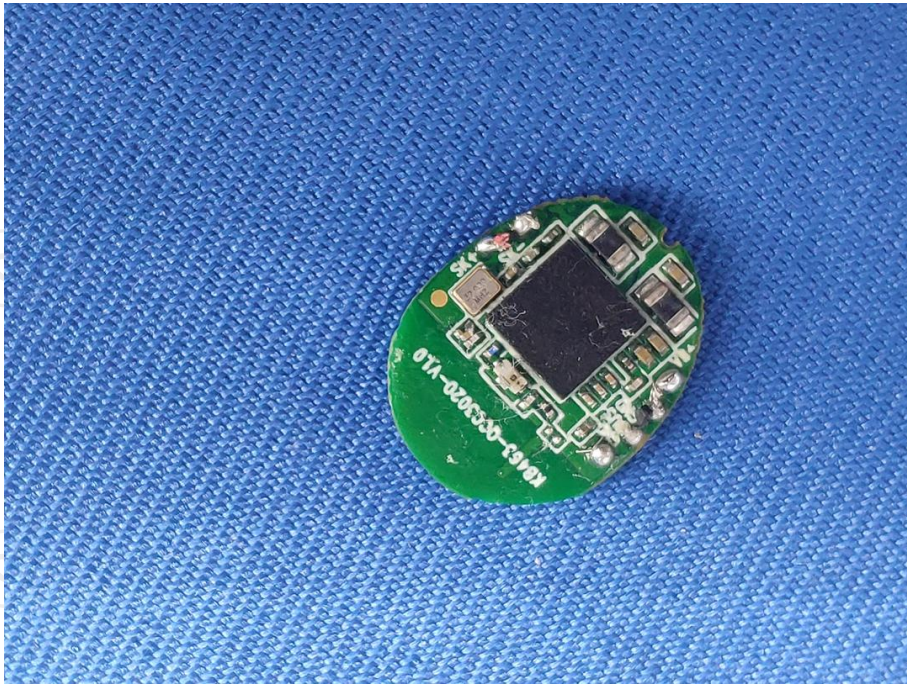

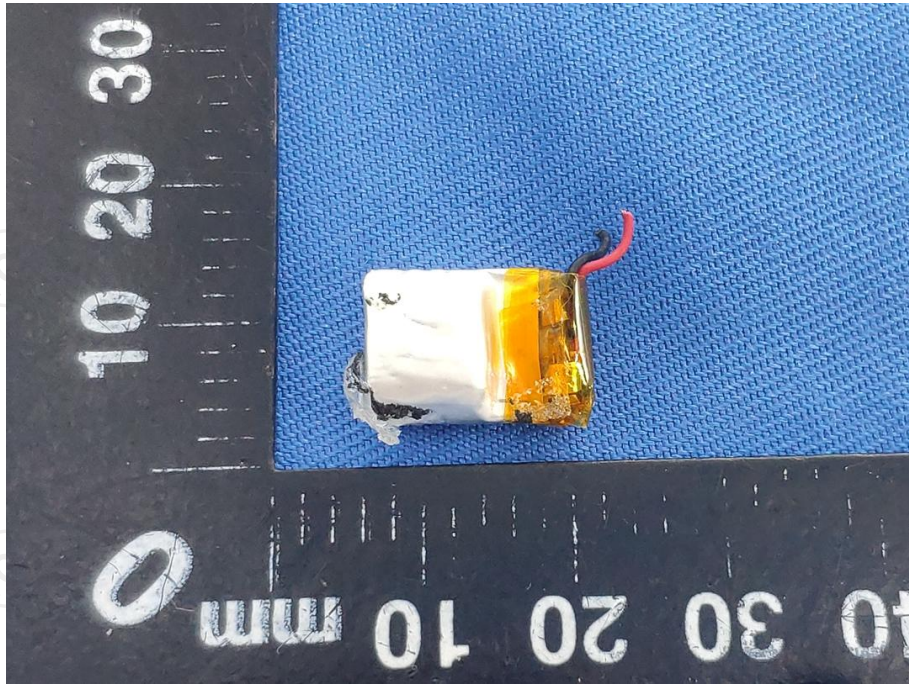

*******END OF REPORT*******