


APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX G Mode Channel 01	Polarization	Vertical
-----------	----------------------	--------------	----------

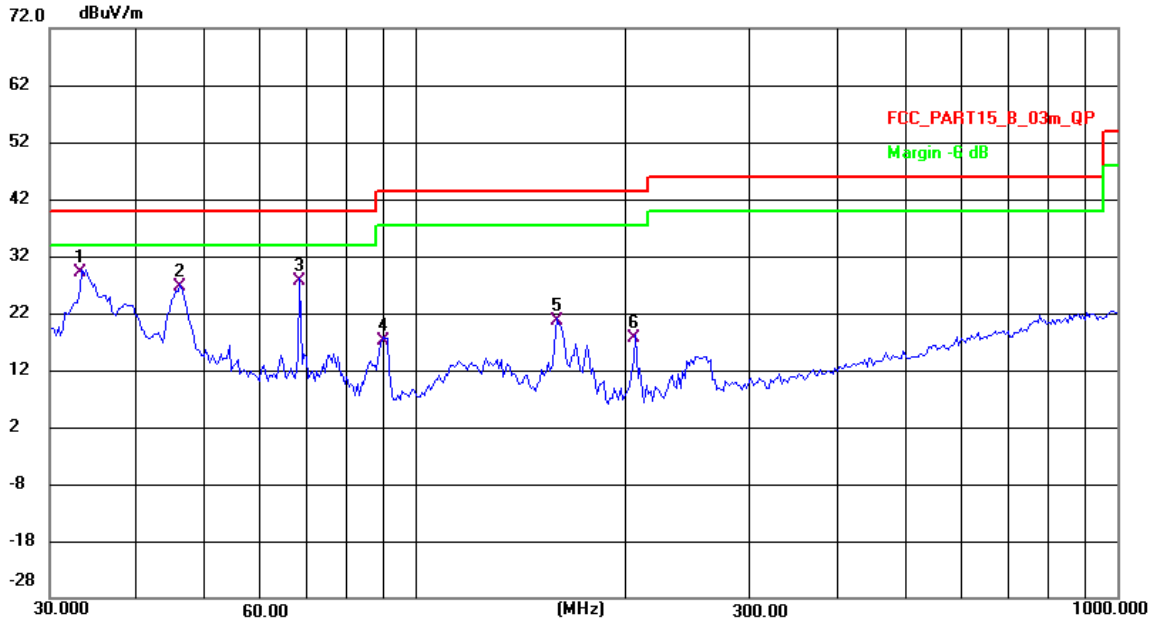


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	33.3349	52.14	-23.10	29.04	40.00	-10.96	QP	199	288	P	
2	46.0558	48.90	-22.19	26.71	40.00	-13.29	QP	100	134	P	
3	68.2636	51.39	-23.77	27.62	40.00	-12.38	QP	199	350	P	
4	89.7866	42.99	-25.74	17.25	43.50	-26.25	QP	108	48	P	
5	158.6399	41.29	-20.74	20.55	43.50	-22.95	QP	100	220	P	
6	205.7458	42.52	-24.92	17.60	43.50	-25.90	QP	162	34	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 01	Polarization	Horizontal
-----------	----------------------	--------------	------------

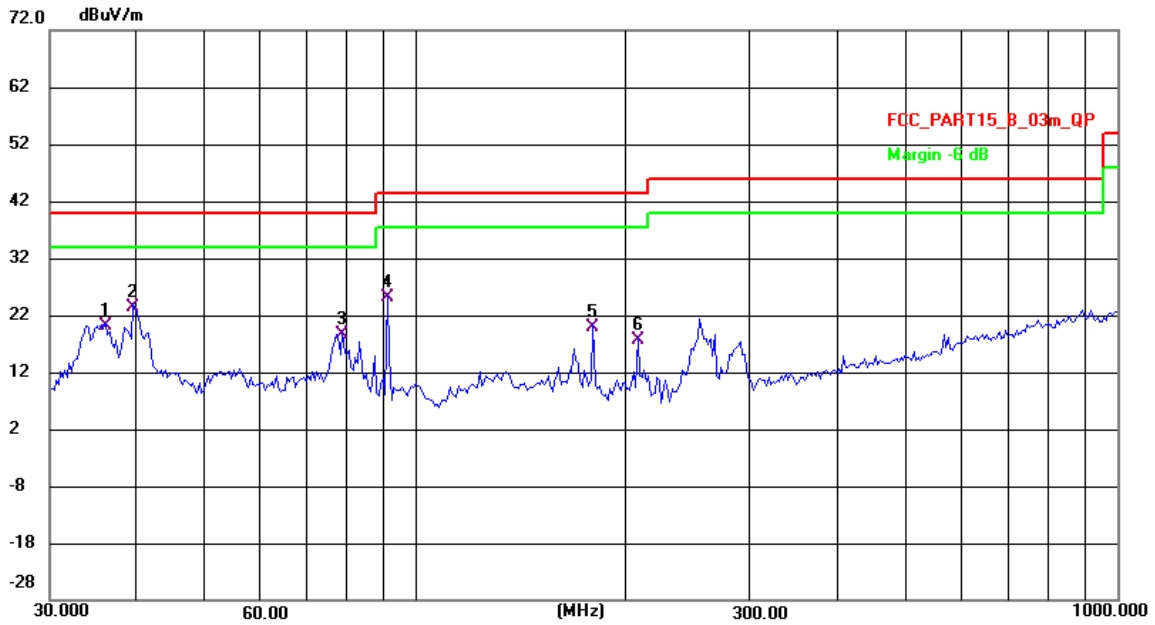

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	36.0139	42.79	-22.77	20.02	40.00	-19.98	QP	173	205	P	
2 *	39.4588	45.64	-22.15	23.49	40.00	-16.51	QP	100	162	P	
3	78.5645	44.15	-25.61	18.54	40.00	-21.46	QP	199	11	P	
4	91.0574	50.70	-25.64	25.06	43.50	-18.44	QP	216	11	P	
5	178.7697	42.30	-22.38	19.92	43.50	-23.58	QP	199	33	P	
6	207.1968	42.54	-24.98	17.56	43.50	-25.94	QP	109	241	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIXD -RADIATED EMISSION- ABOVE 1000MHZ

Test Result of Radiated Spurious at Band edges.

Note: All test plots below include both horizontal and vertical

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX B Mode 2412 MHz			
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	73.14	-21.47	51.67	74.00	-22.33	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	72.98	-26.12	46.86	74.00	-27.14	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	72.51	-21.47	51.04	74.00	-22.96	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	70.73	-26.12	44.61	74.00	-29.39	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX B Mode 2462 MHz			
1	2483.5	H	74.85	-25.29	49.56	74.00	-24.44	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	73.09	-25.29	47.80	74.00	-26.20	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg

Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.

2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.
 Result=Reading + Correct Factor.
 Margin= Result-Limit.

3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Results				PASS				
Frequency Range				2310MHz~2410MHz				
Test Mode				TX G Mode 2412 MHz				
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	73.21	-21.47	51.74	74.00	-22.26	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	70.29	-26.12	44.17	74.00	-29.83	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.03	-21.47	52.56	74.00	-21.44	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	73.55	-26.12	47.43	74.00	-26.57	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results				PASS				
Frequency Range				2450MHz~2550MHz				
Test Mode				TX G Mode 2462 MHz				
1	2483.5	H	79.02	-25.29	53.73	74.00	-20.27	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	79.26	-25.29	53.97	74.00	-20.03	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg

Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.

2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.
 Result=Reading + Correct Factor.
 Margin= Result-Limit.

3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Results				PASS				
Frequency Range				2310MHz~2410MHz				
Test Mode				TX N(HT20) Mode 2412 MHz				
N o.	Freq MHz	Polarity	Reading (dBUV/m)	Correct Factor	Result (dBUV/m)	Limit (dBUV/m)	Margin	Remark
1	2390	H	75.04	-21.47	53.57	74.00	-20.43	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	77.01	-26.12	50.89	74.00	-23.11	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	75.11	-21.47	53.64	74.00	-20.36	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	76.02	-26.12	49.9	74.00	-24.10	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results				PASS				
Frequency Range				2450MHz~2550MHz				
Test Mode				TX N(HT20) Mode 2462 MHz				
1	2483.5	H	78.33	-25.29	53.04	74.00	-20.96	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	76.01	-25.29	50.72	74.00	-23.28	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg

Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.

2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.
 Result=Reading + Correct Factor.
 Margin= Result-Limit.

3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX N(HT40) Mode 2422 MHz			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.05	-21.47	53.58	74.00	-20.42	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	76.33	-26.12	50.21	74.00	-23.79	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	75.03	-21.47	53.56	74.00	-20.44	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	76.09	-26.12	49.97	74.00	-24.03	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX N(HT40) Mode 2452 MHz			
1	2483.5	H	75.32	-25.29	50.03	74.00	-23.97	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	76.49	-25.29	51.20	74.00	-22.80	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg

Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.

2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.
 Result=Reading + Correct Factor.
 Margin= Result-Limit.

3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

ABOVE 1000 MHz

Note: All the modes have been tested and recorded worst mode in the report.

Modulation Type:802.11b

Channel 1 / 2412 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4824.00	H	53.64	51.3	-1.88	51.76	---	74	54	-22.24
7236.00	H	42.31	---	7.8	50.11	---	74	54	-23.89
---	H	---	---	---	---	---	---	---	---
4824.00	V	53.69	---	-1.88	51.81	---	74	54	-22.19
7236.00	V	41.99	---	7.8	49.79	---	74	54	-24.21
---	V	---	---	---	---	---	---	---	---

Channel 6 / 2437 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4874.00	H	57.63	52.31	-1.59	56.04	50.72	74	54	-17.96
7311.00	H	42.93	---	8.1	51.03	---	74	54	-22.97
---	H	---	---	---	---	---	---	---	---
4874.00	V	55.53	---	-1.59	53.94	---	74	54	-20.06
7311.00	V	41.85	---	8.1	49.95	---	74	54	-24.05
---	V	---	---	---	---	---	---	---	---

Channel 11 / 2462 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4924.00	H	54.98	52	-1.3	53.68	---	74	54	-20.32
7386.00	H	41.68	---	9	50.68	---	74	54	-23.32
---	H	---	---	---	---	---	---	---	---
4924.00	V	54.53	---	-1.3	53.23	---	74	54	-20.77
7386.00	V	43.37	---	9	52.37	---	74	54	-21.63
---	V	---	---	---	---	---	---	---	---

Notes:

- 1). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 2). Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3). Worst case data at 1Mbps at IEEE 802.11b.
- 4). Measured Level = Reading Level + Factor, Margin = Measured Level – Limit


APPENDIXE - BANDWIDTH

1. DTS Bandwidth


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.04	2408.48	2415.52	0.5	PASS
		2437	8.08	2432.96	2441.04	0.5	PASS
		2462	8.08	2457.96	2466.04	0.5	PASS
11G	Ant1	2412	15.08	2404.44	2419.52	0.5	PASS
		2437	15.08	2429.48	2444.56	0.5	PASS
		2462	16.32	2453.84	2470.16	0.5	PASS
11N20SISO	Ant1	2412	13.80	2405.68	2419.48	0.5	PASS
		2437	15.08	2429.44	2444.52	0.5	PASS
		2462	17.60	2453.20	2470.80	0.5	PASS
11N40SISO	Ant1	2422	33.92	2405.68	2439.60	0.5	PASS
		2437	35.44	2419.08	2454.52	0.5	PASS
		2452	15.04	2443.28	2458.32	0.5	PASS

Test Graphs


11B_Ant1_2412

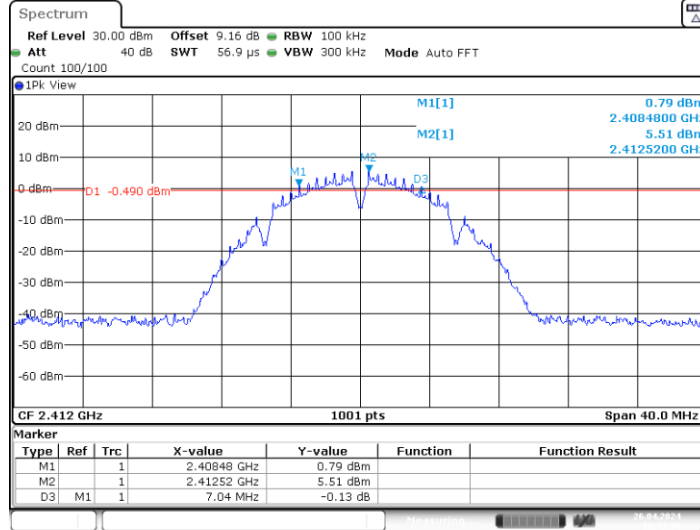


11B_Ant1_2437

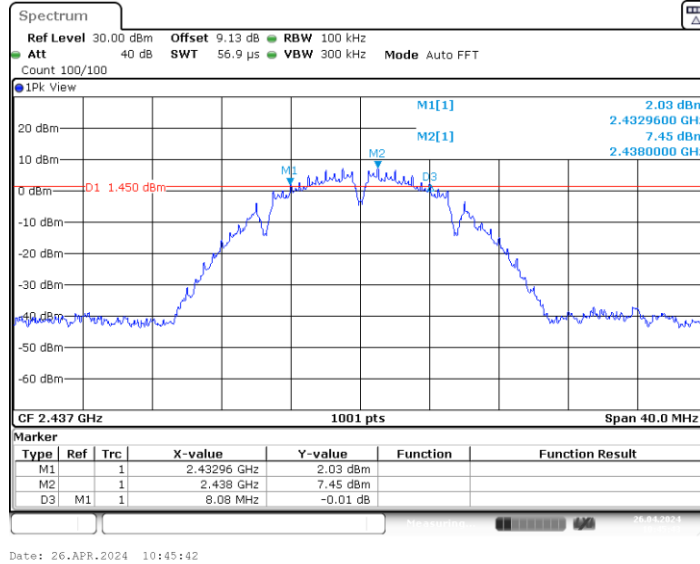


11B_Ant1_2462

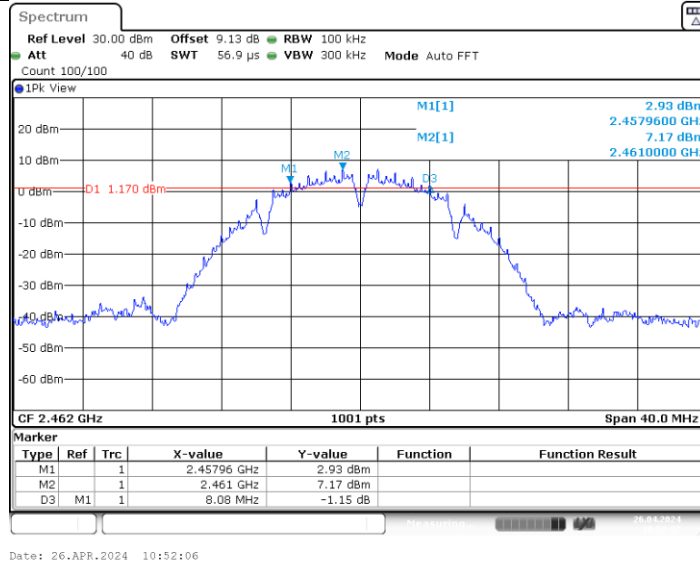


11G_Ant1_2412

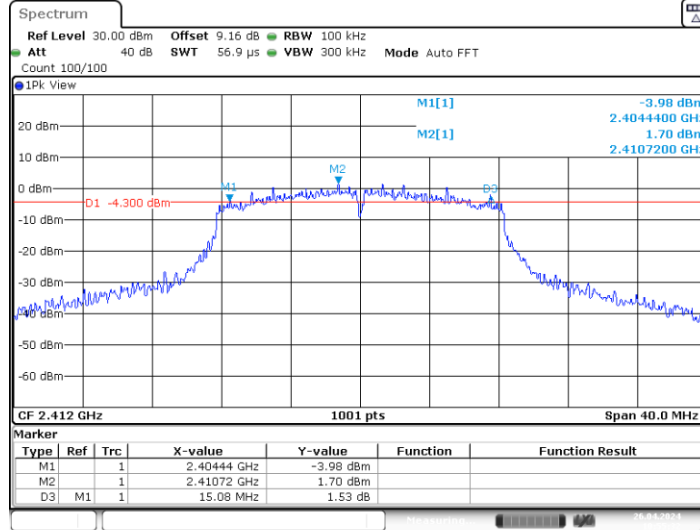


11G_Ant1_2437

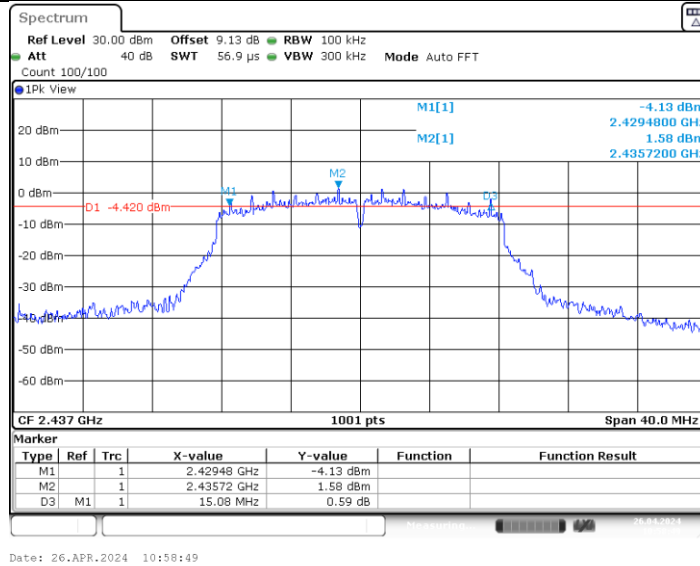


11G_Ant1_2462

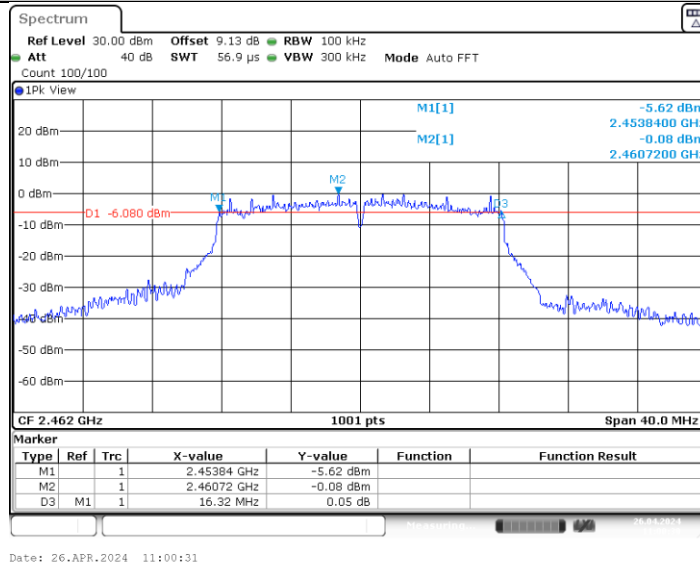


11N20SISO_Ant1_2412

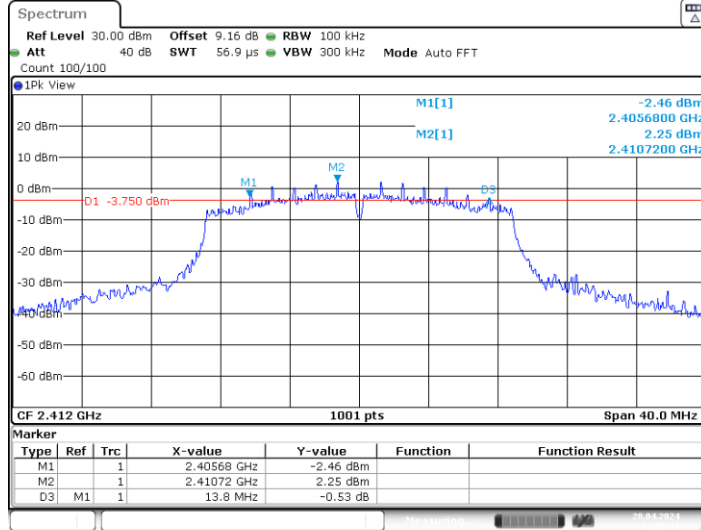


11N20SISO_Ant1_2437

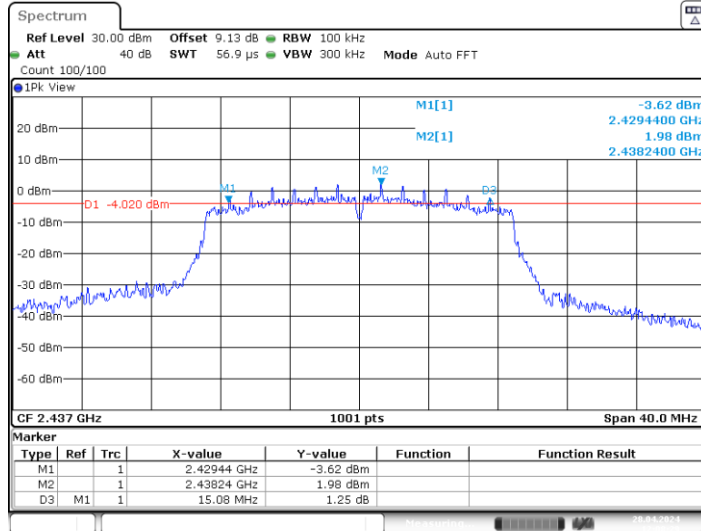


11N20SISO_Ant1_2462

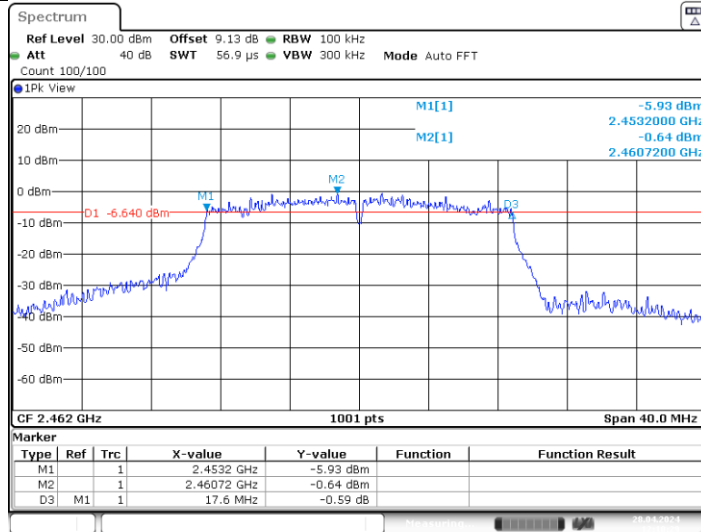


11N40SISO_Ant1_2422

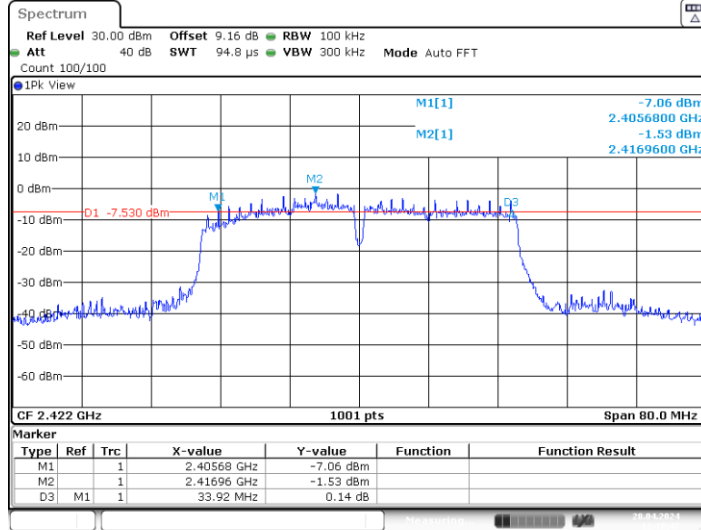

11N40SISO_Ant1_2437

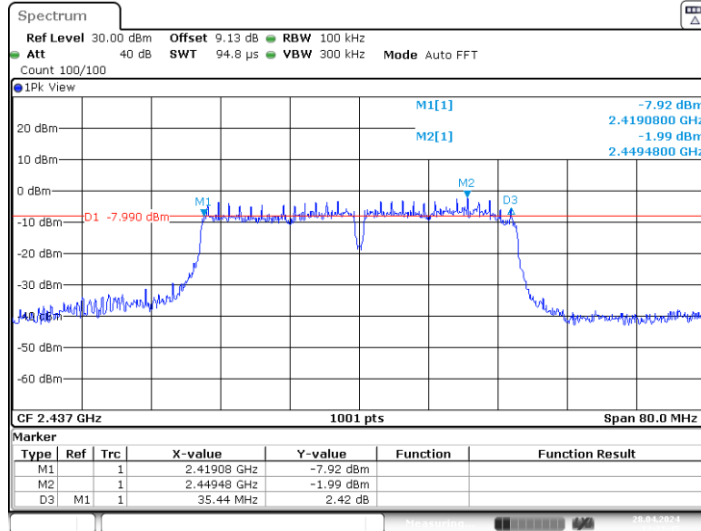

11N40SISO_Ant1_2452



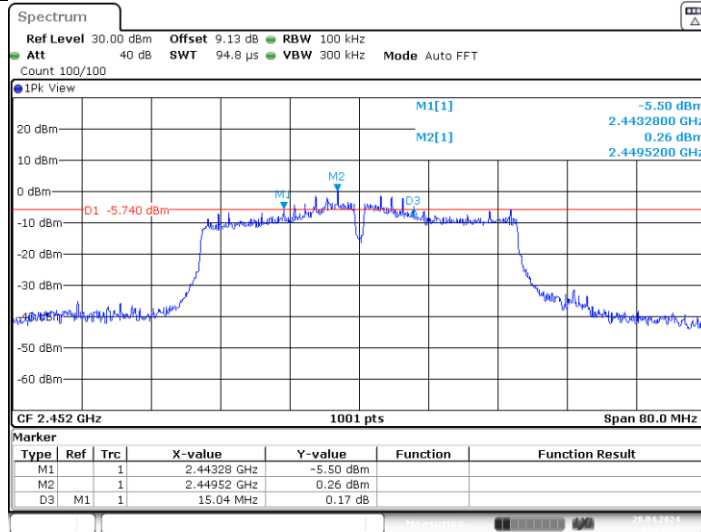





APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]
11B	Ant1	2412	12.39	99.76	0.01	12.40	≤30.00
		2437	12.54	99.64	0.02	12.56	≤30.00
		2462	12.50	99.76	0.01	12.51	≤30.00
11G	Ant1	2412	12.47	97.20	0.12	12.59	≤30.00
		2437	12.48	97.89	0.09	12.57	≤30.00
		2462	12.22	97.20	0.12	12.34	≤30.00
11N20SISO	Ant1	2412	12.28	97.01	0.13	12.41	≤30.00
		2437	12.19	97.74	0.10	12.29	≤30.00
		2462	12.08	97.76	0.10	12.18	≤30.00
11N40SISO	Ant1	2422	11.57	94.20	0.26	11.83	≤30.00
		2437	11.51	95.59	0.20	11.71	≤30.00
		2452	11.48	94.12	0.26	11.74	≤30.00


DC Factor = $10 \cdot \log(1 / \text{Duty Cycle})$

TEST GRAPHS AVERAGE

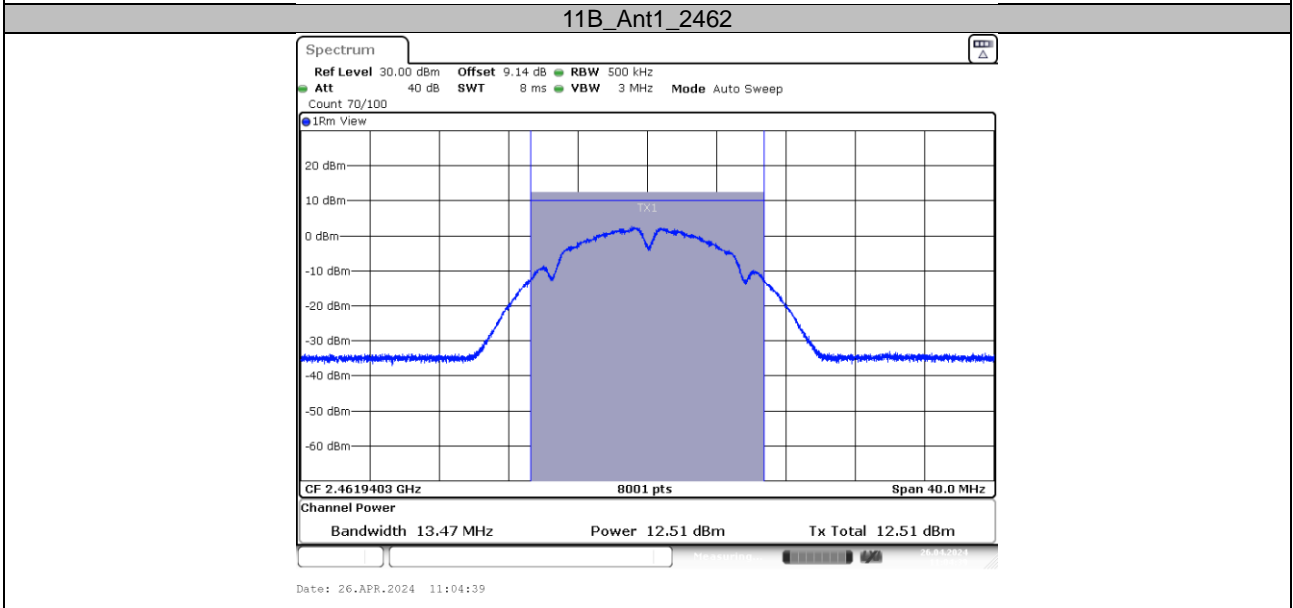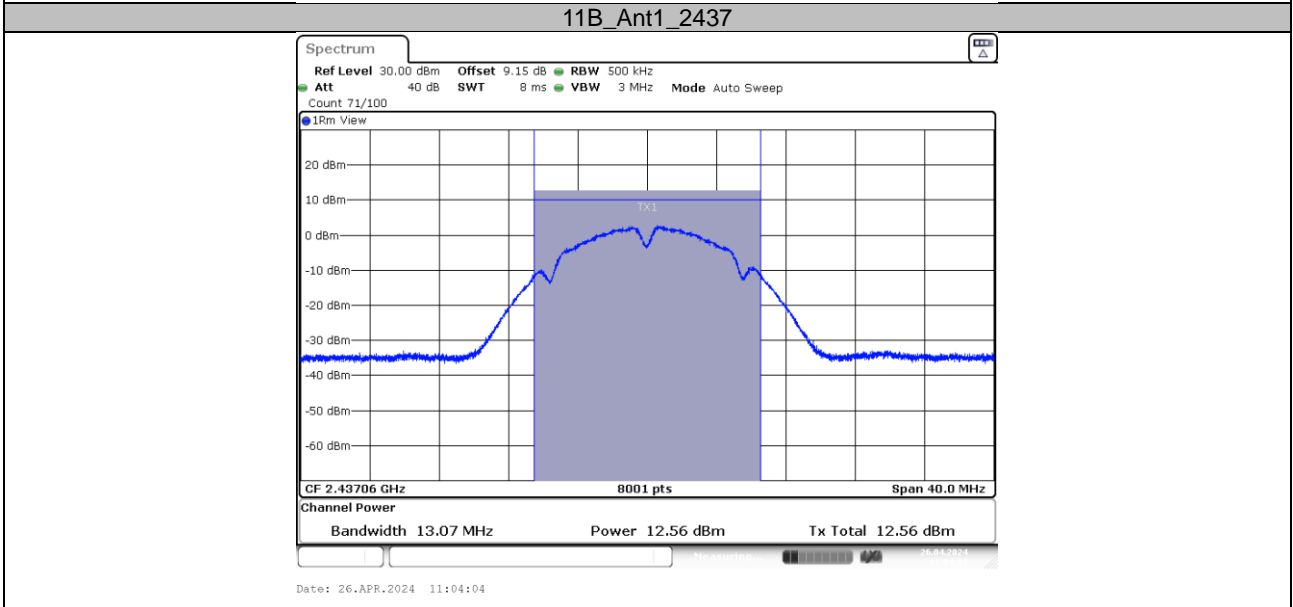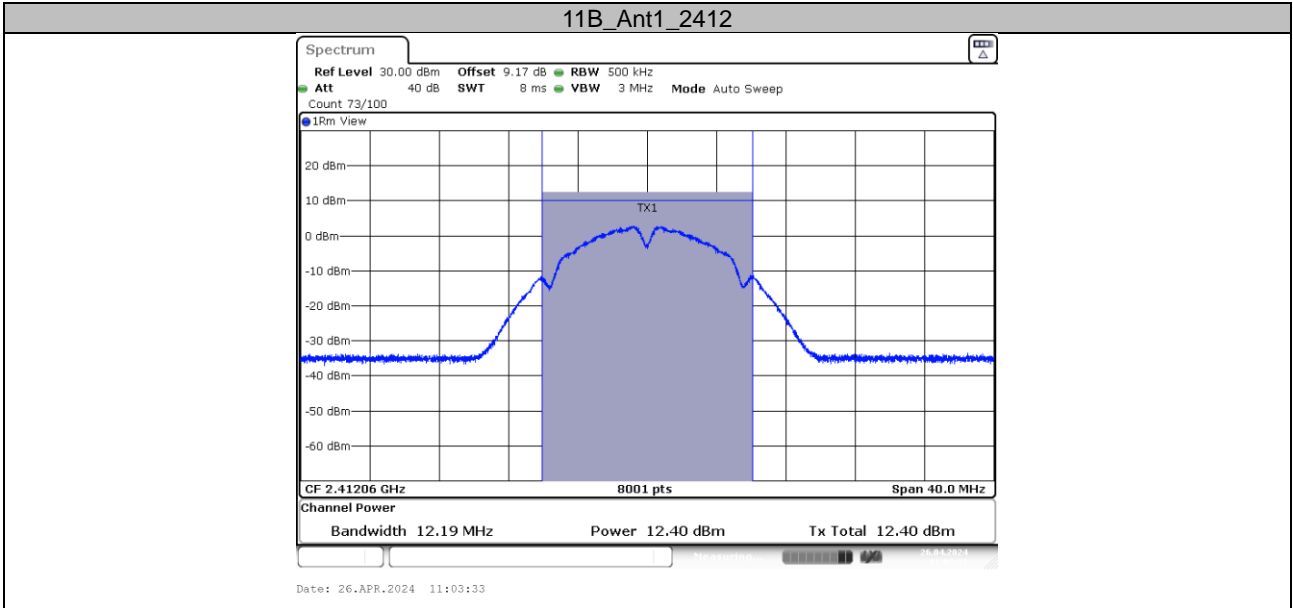


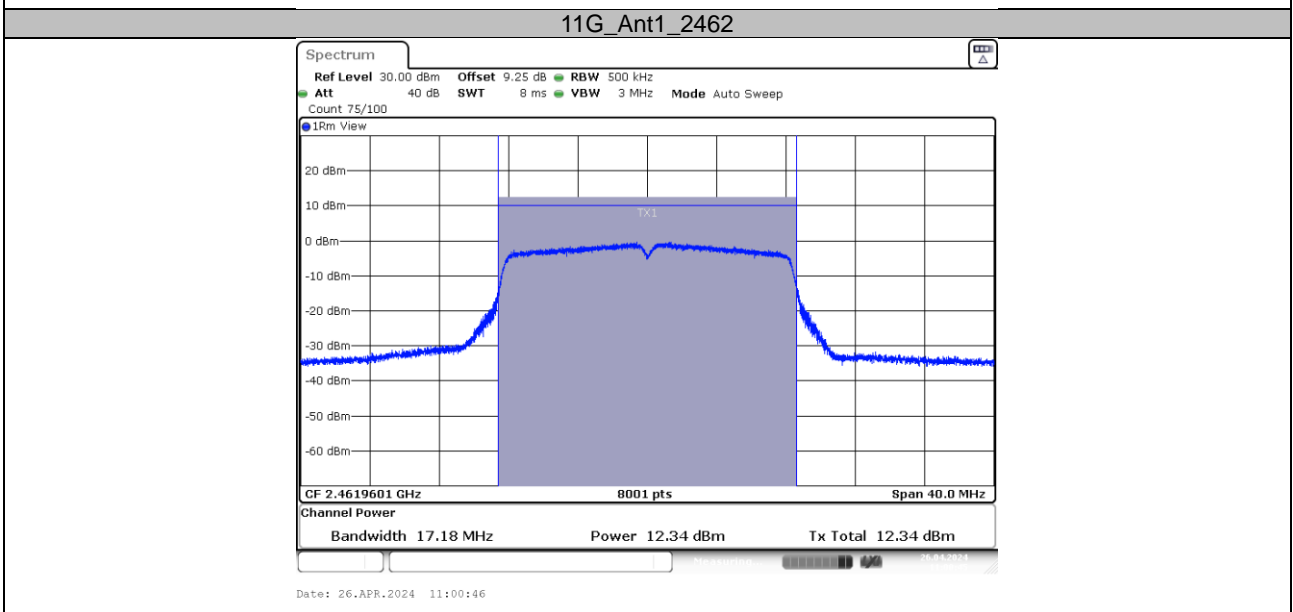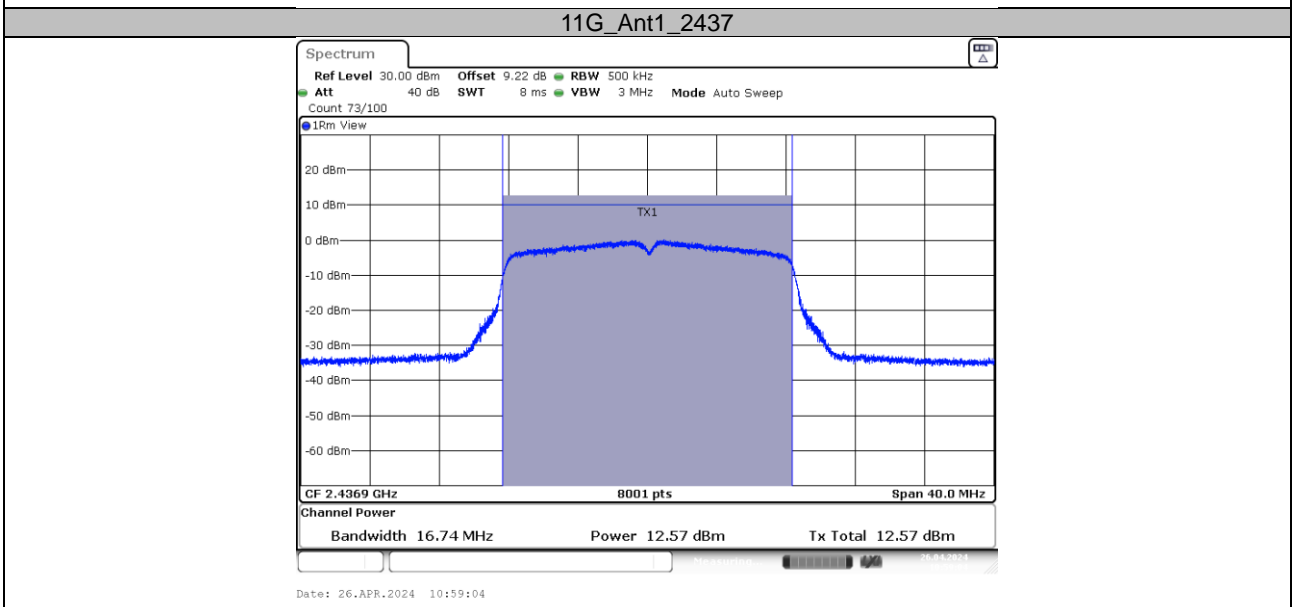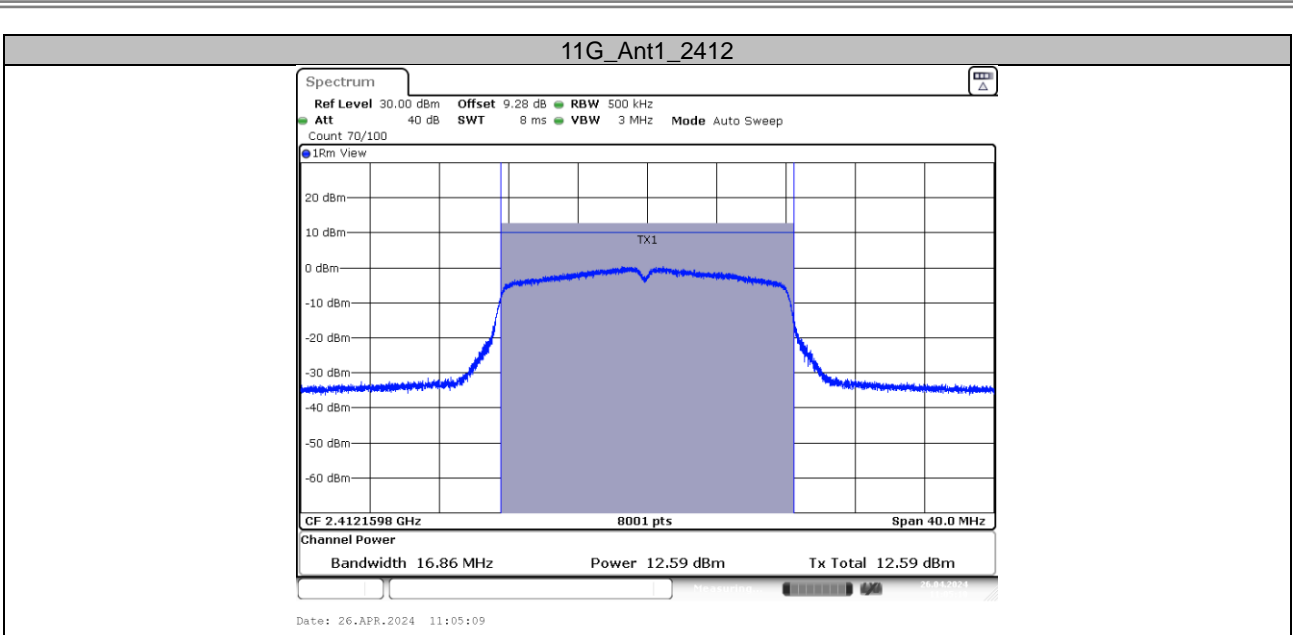


11N20SISO_Ant1_2412



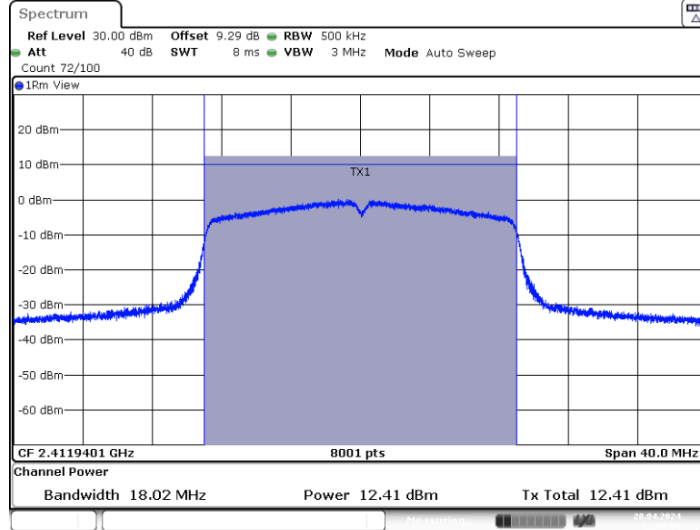


11N20SISO_Ant1_2437

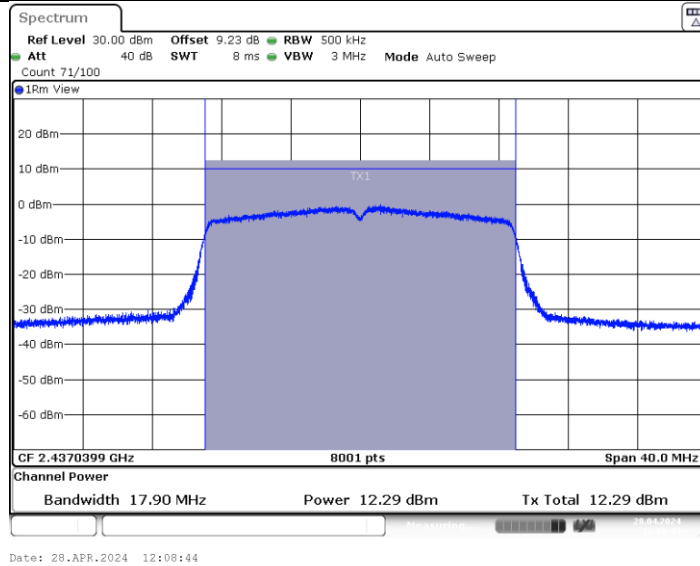

11N20SISO_Ant1_2462

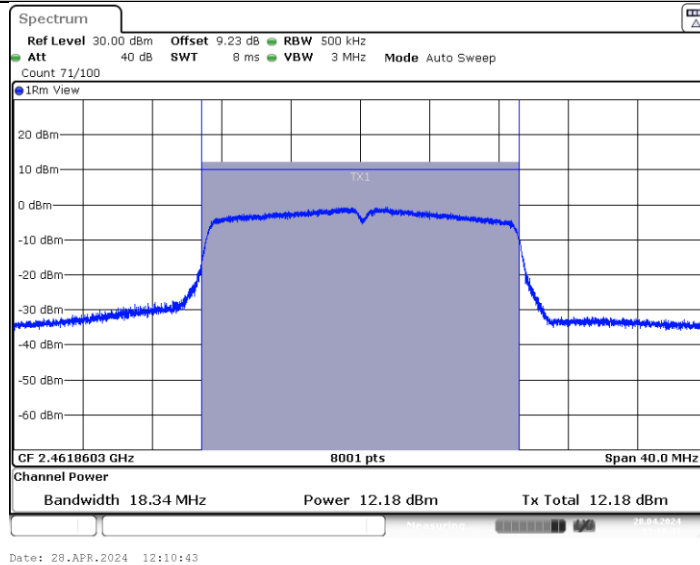

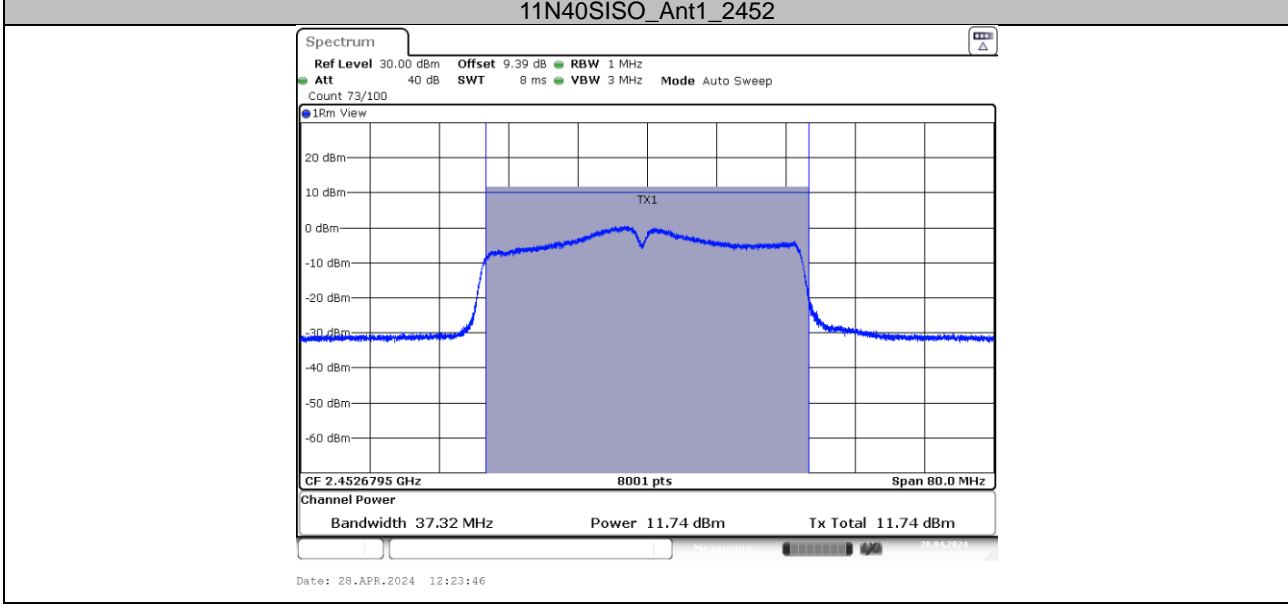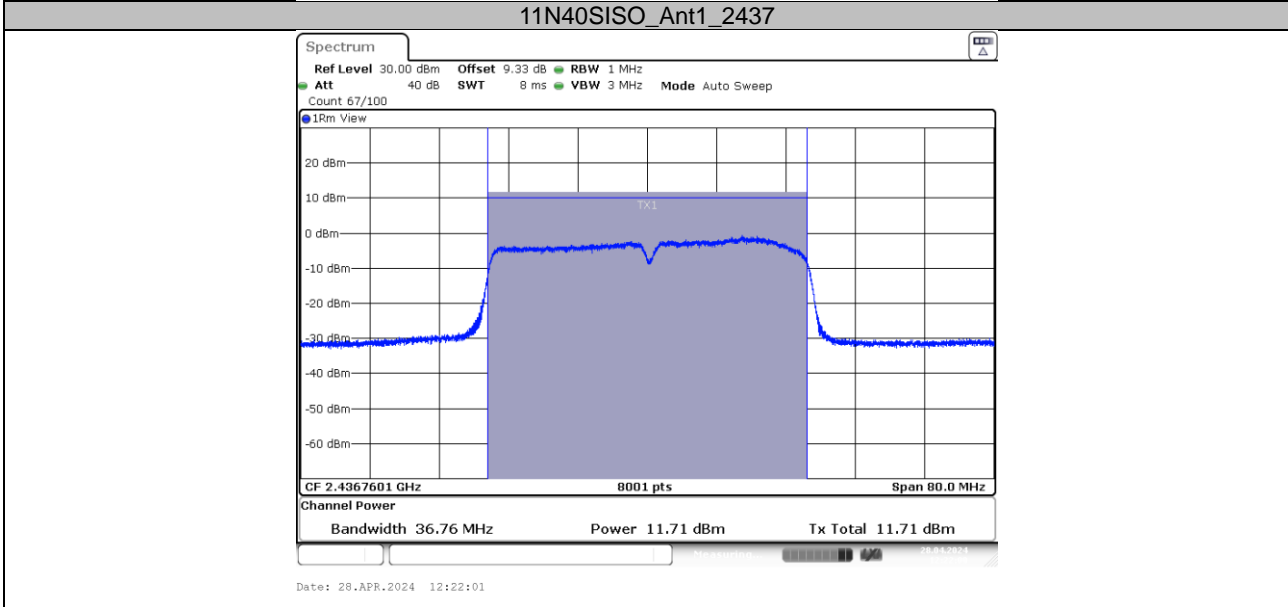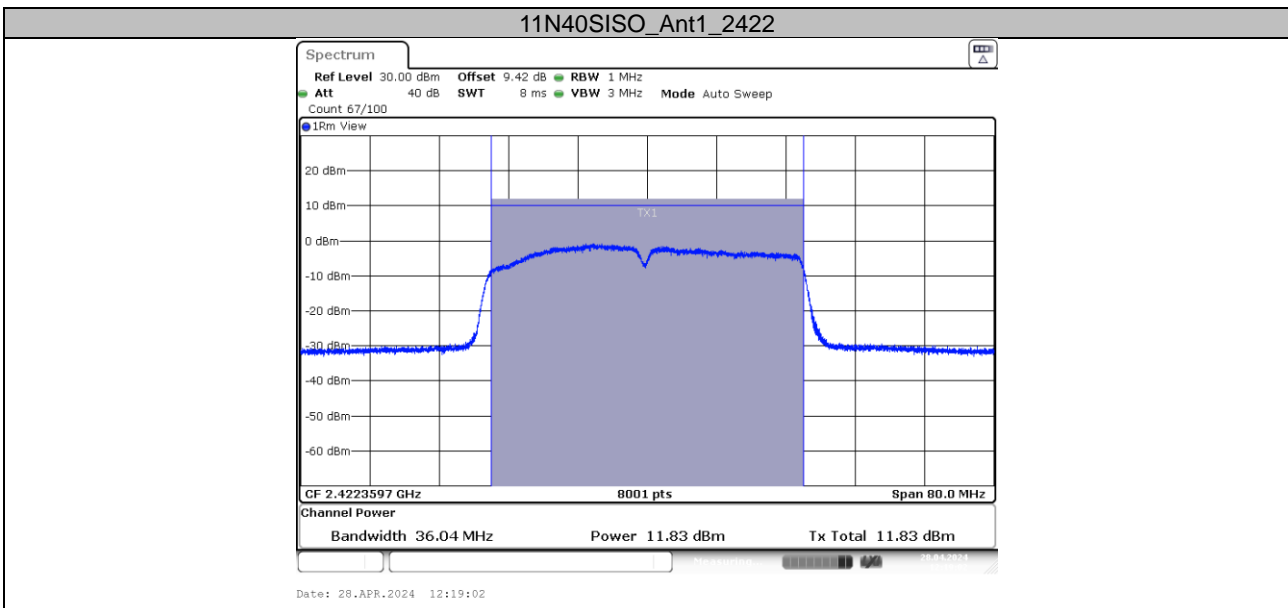


APPENDIXG - CONDUCTED SPURIOUS EMISSIONS

1. Conducted Spurious Emission


TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	30~1000	5.71	-60.34	≤-24.29	PASS
		1000~26500	5.71	-45.63	≤-24.29	PASS
	2437	30~1000	7.64	-58.77	≤-22.36	PASS
		1000~26500	7.64	-43.12	≤-22.36	PASS
	2462	30~1000	7.24	-59.84	≤-22.76	PASS
		1000~26500	7.24	-44.49	≤-22.76	PASS
11G	2412	30~1000	1.70	-59.2	≤-28.3	PASS
		1000~26500	1.70	-46.49	≤-28.3	PASS
	2437	30~1000	1.71	-60.37	≤-28.29	PASS
		1000~26500	1.71	-46.55	≤-28.29	PASS
	2462	30~1000	0.99	-59.52	≤-29.01	PASS
		1000~26500	0.99	-46.29	≤-29.01	PASS
11N20SIS O	2412	30~1000	2.36	-60.36	≤-27.64	PASS
		1000~26500	2.36	-45.82	≤-27.64	PASS
	2437	30~1000	1.00	-60.1	≤-29	PASS
		1000~26500	1.00	-46.01	≤-29	PASS
	2462	30~1000	1.59	-58.98	≤-28.41	PASS
		1000~26500	1.59	-45.85	≤-28.41	PASS
11N40SIS O	2422	30~1000	-1.82	-59.42	≤-31.82	PASS
		1000~26500	-1.82	-46.61	≤-31.82	PASS
	2437	30~1000	-2.26	-60.13	≤-32.26	PASS
		1000~26500	-2.26	-46.03	≤-32.26	PASS
	2452	30~1000	0.65	-60.64	≤-29.35	PASS
		1000~26500	0.65	-45.73	≤-29.35	PASS

Test Graphs


11B_Ant1_2412_30~1000

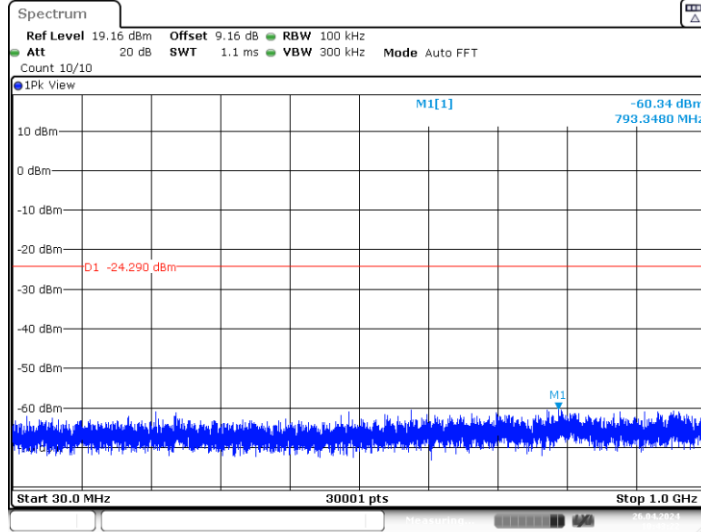


11B_Ant1_2412_1000~26500

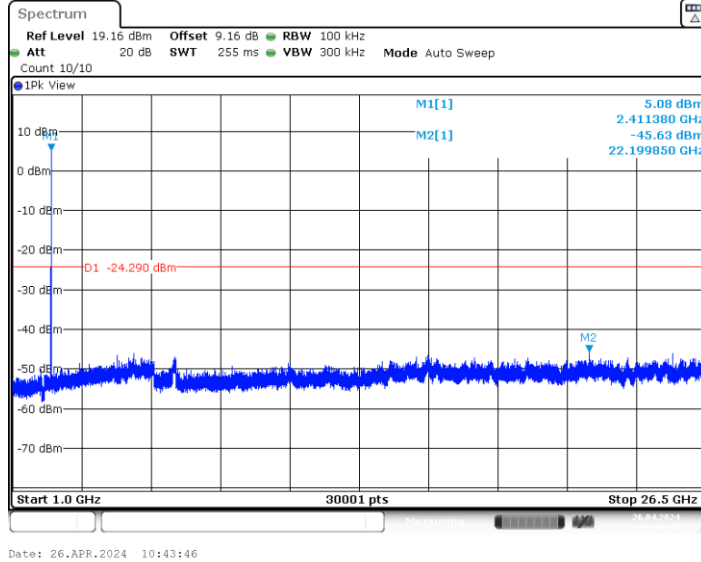

11B_Ant1_2437_30~1000

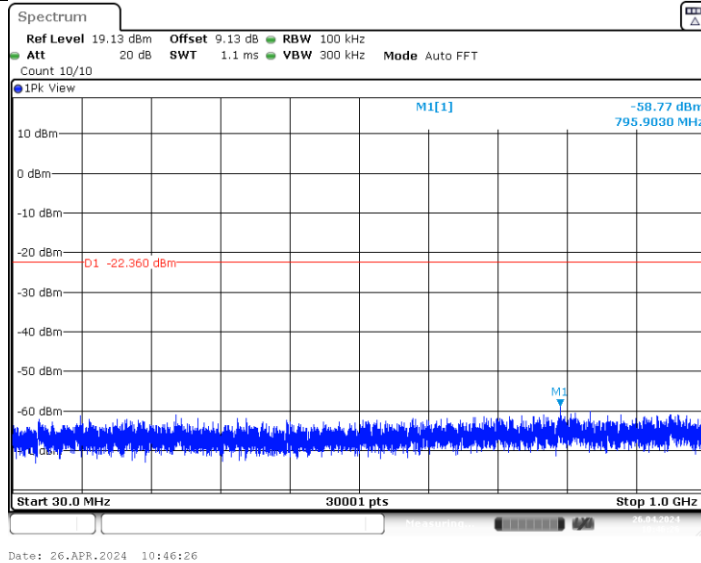


11B_Ant1_2437_1000~26500

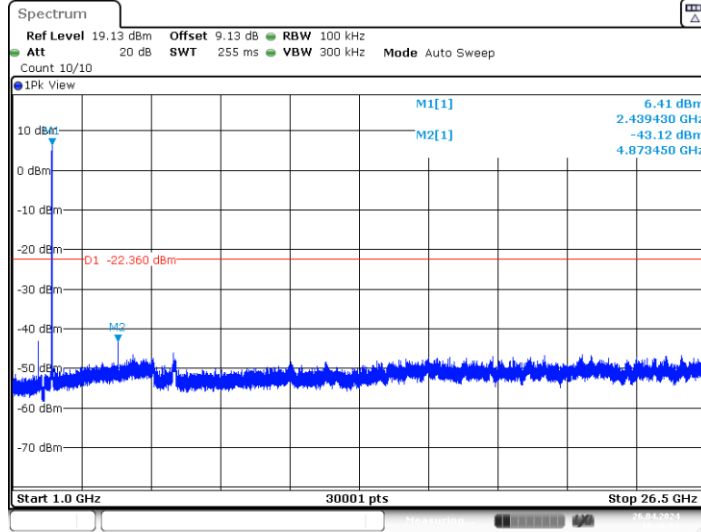


Date: 26.APR.2024 10:46:50

11B_Ant1_2462_30~1000

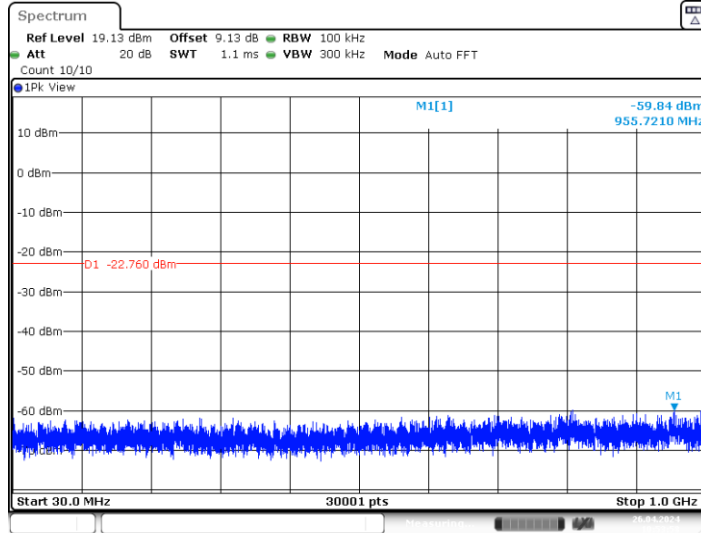


Date: 26.APR.2024 10:53:58

11B_Ant1_2462_1000~26500

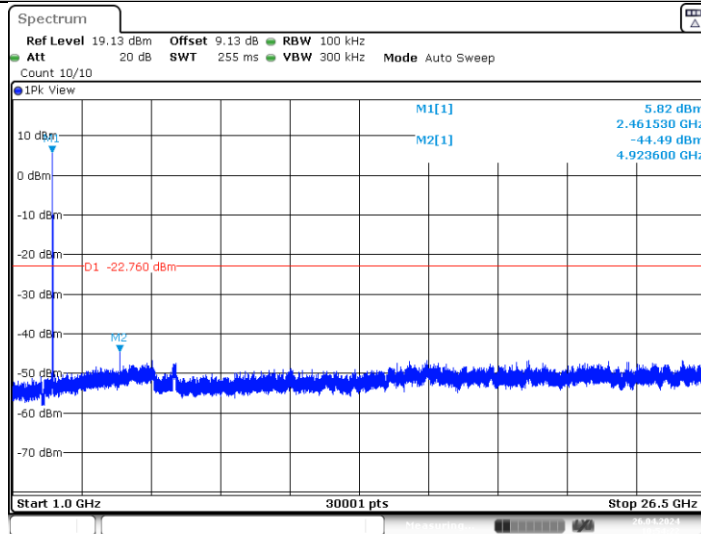


Date: 26.APR.2024 10:54:22


11G_Ant1_2412_30~1000

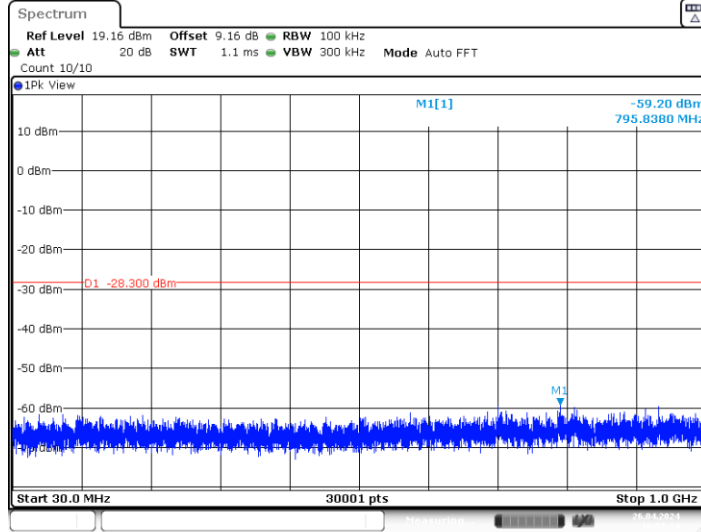


11G_Ant1_2412_1000~26500

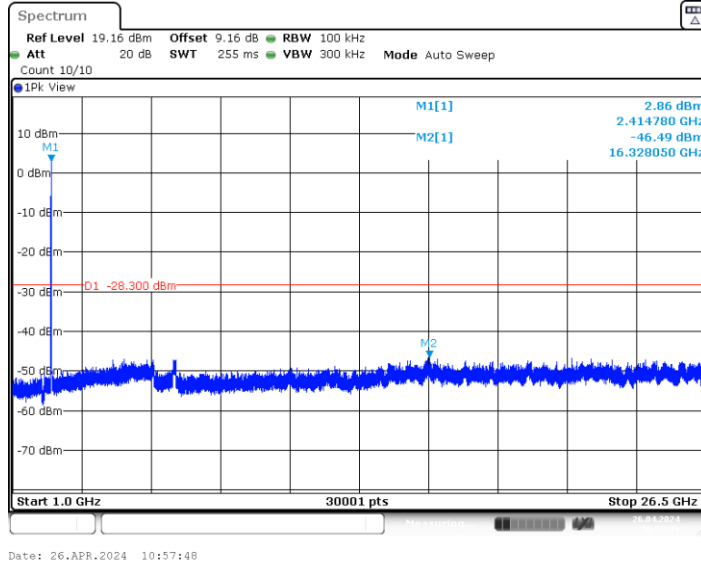


11G_Ant1_2437_30~1000

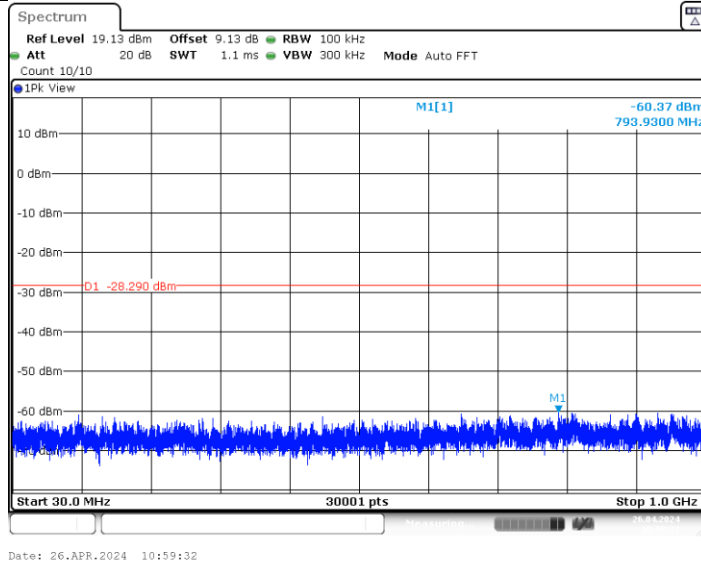


11G_Ant1_2437_1000~26500

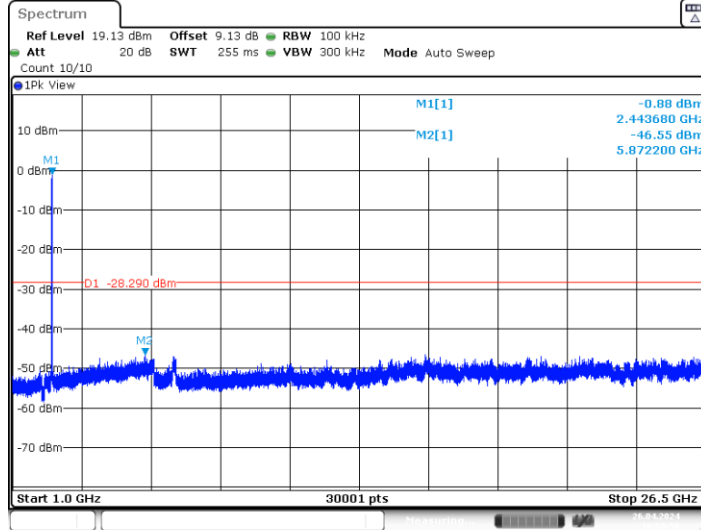


11G_Ant1_2462_30~1000

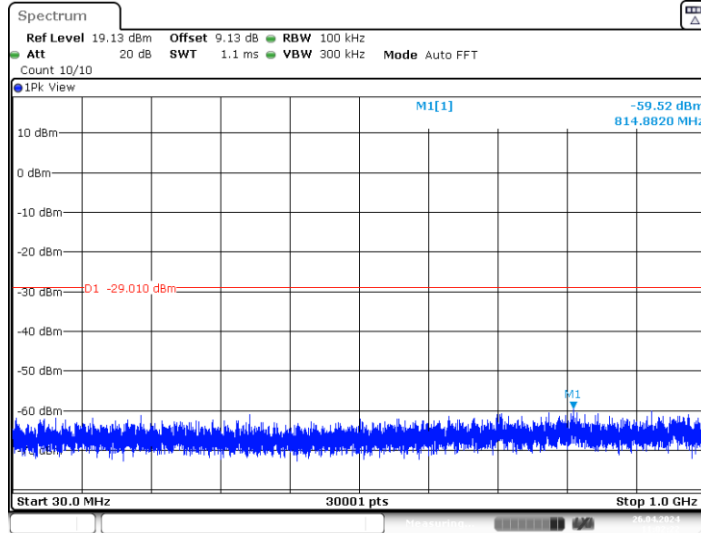


11G_Ant1_2462_1000~26500

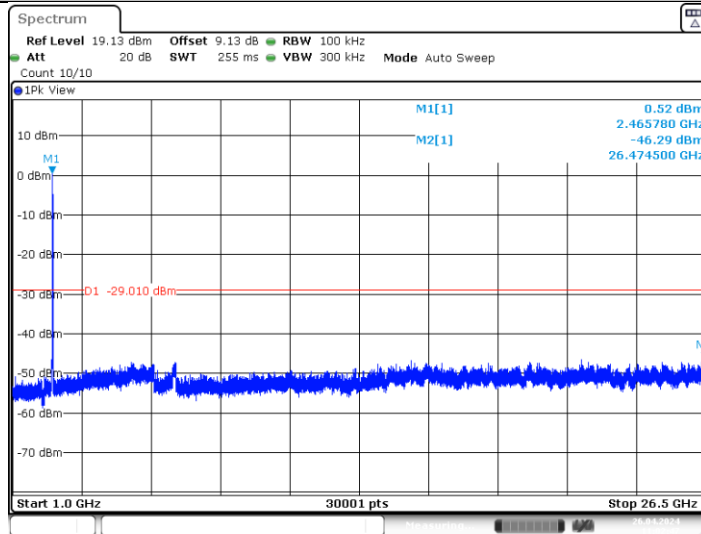


11N20SISO_Ant1_2412_30~1000

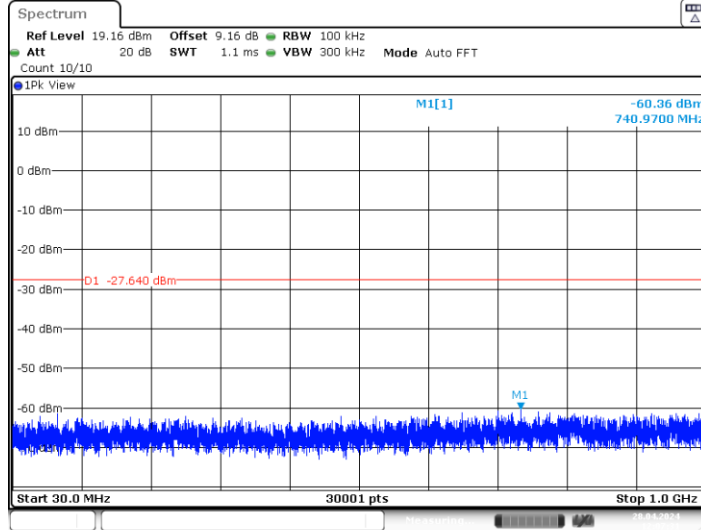


11N20SISO_Ant1_2412_1000~26500

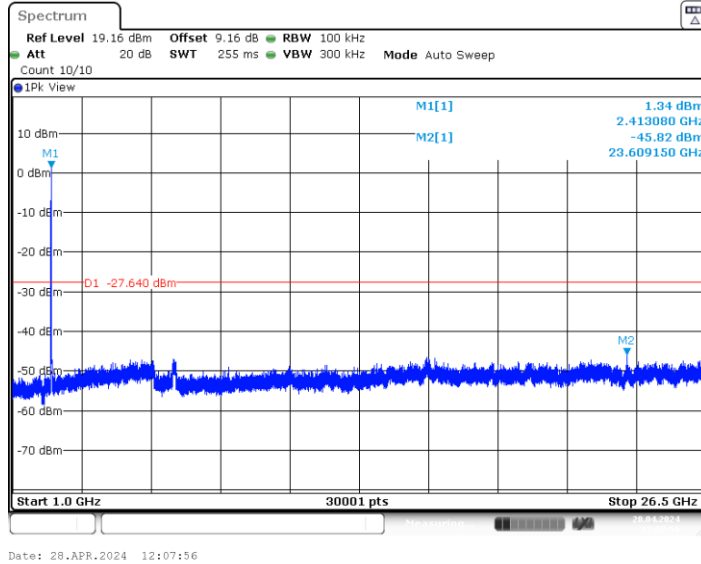


11N20SISO_Ant1_2437_30~1000

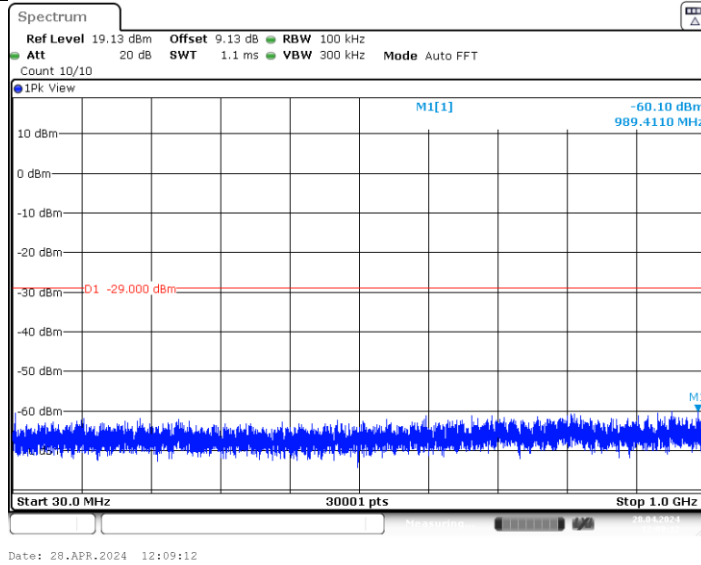


11N20SISO_Ant1_2437_1000~26500

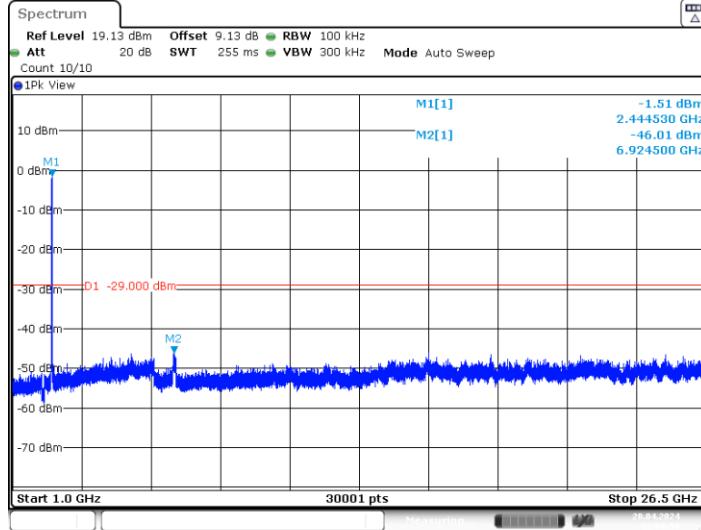


11N20SISO_Ant1_2462_30~1000

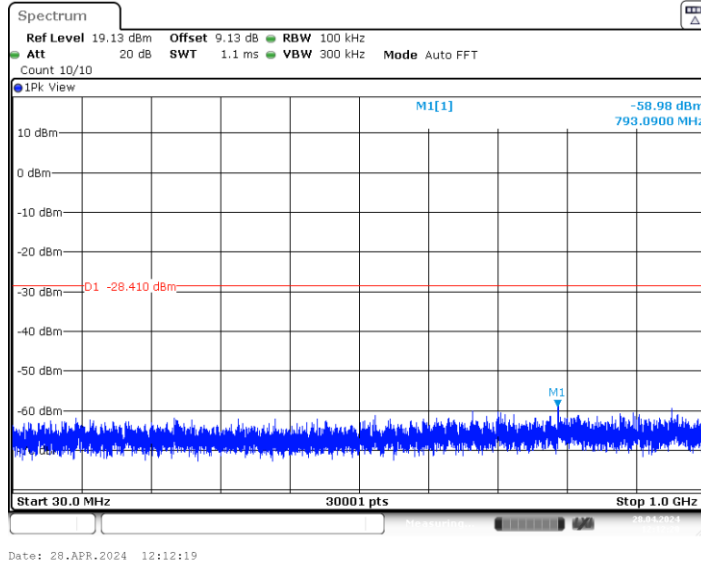


11N20SISO_Ant1_2462_1000~26500

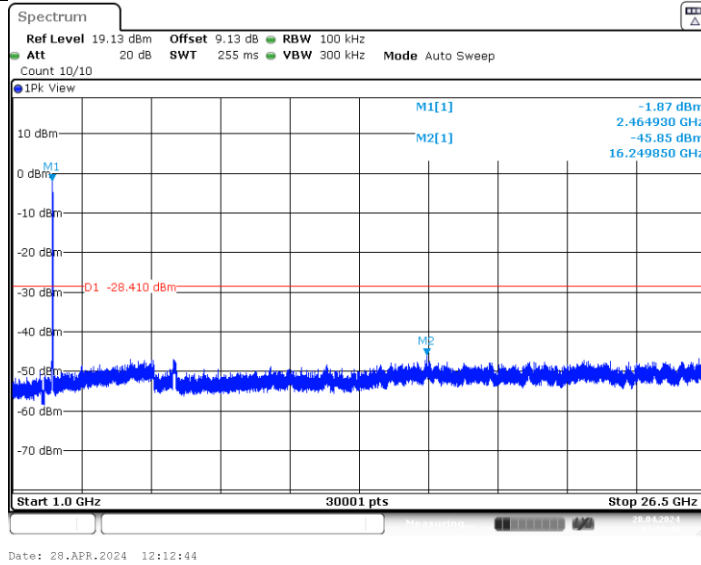


11N40SISO_Ant1_2422_30~1000

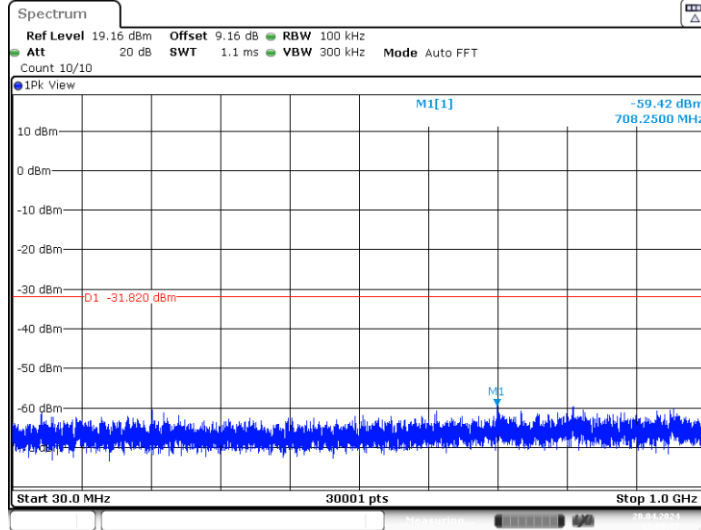


11N40SISO_Ant1_2422_1000~26500

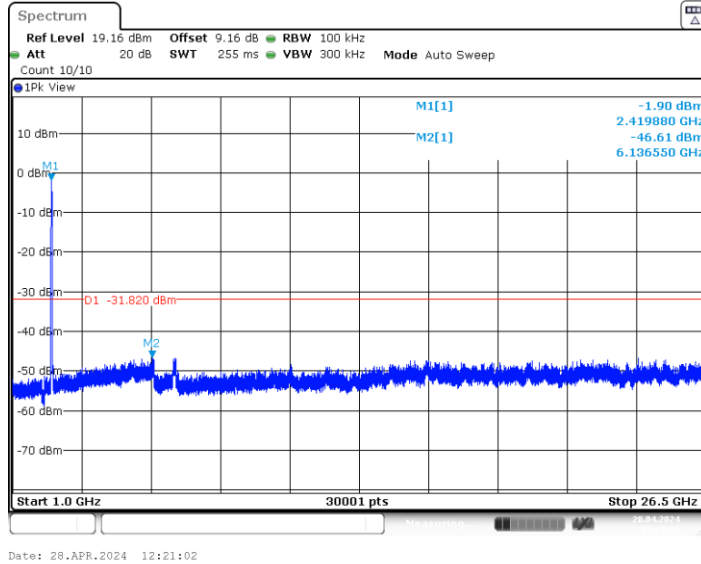


11N40SISO_Ant1_2437_30~1000

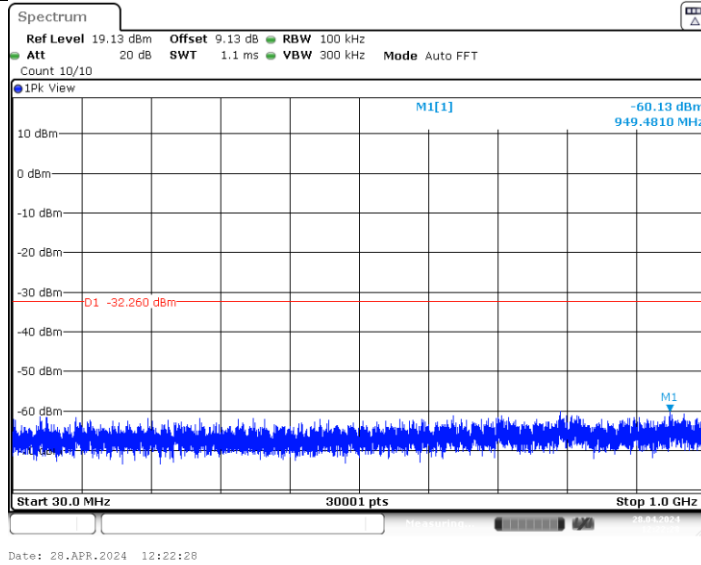


11N40SISO_Ant1_2437_1000~26500

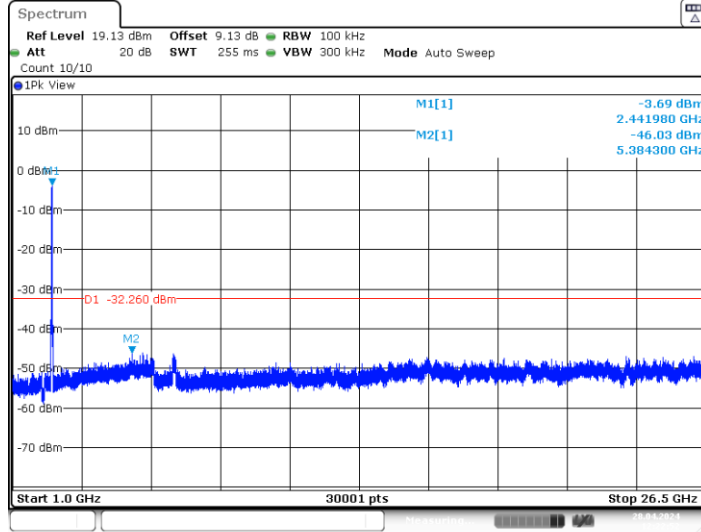

11N40SISO_Ant1_2452_30~1000

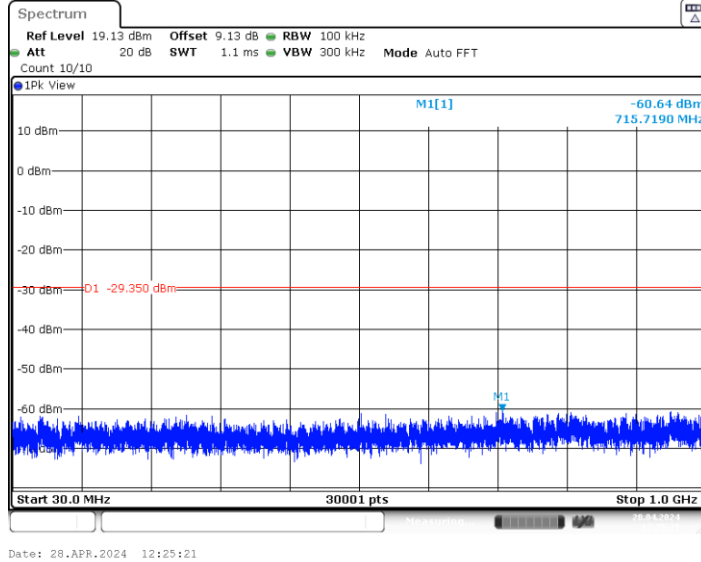

11N40SISO_Ant1_2452_1000~26500



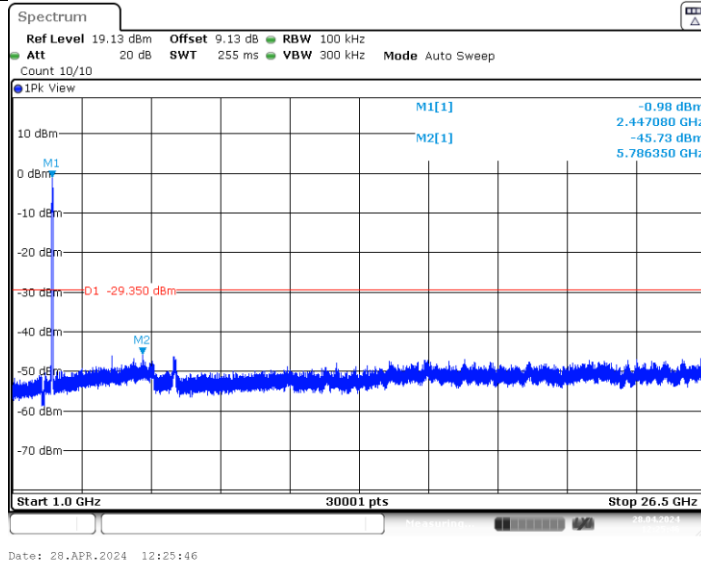


2. Band edge measurements


Reference level measurement

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
11B	Ant1	2412	2412.99	5.71
		2437	2437.49	7.64
		2462	2461.49	7.24
11G	Ant1	2412	2410.72	1.70
		2437	2438.24	1.71
		2462	2463.24	0.99
11N20SISO	Ant1	2412	2413.26	2.36
		2437	2435.72	1.00
		2462	2463.26	1.59
11N40SISO	Ant1	2422	2416.99	-1.82
		2437	2452.00	-2.26
		2452	2449.49	0.65


TEST GRAPHS

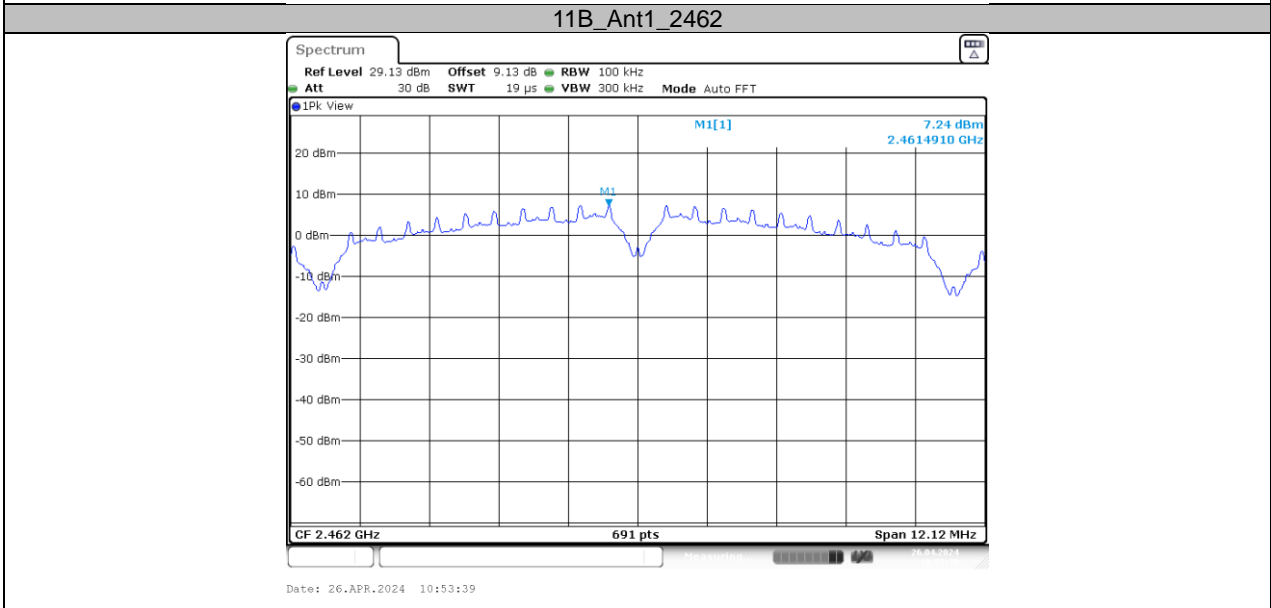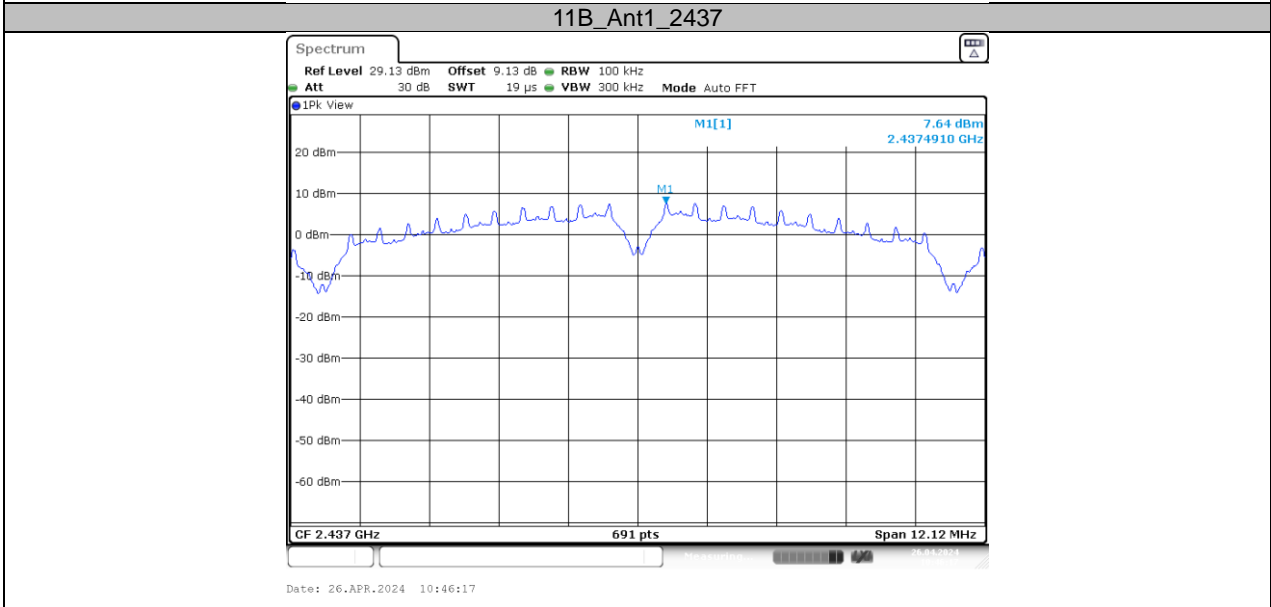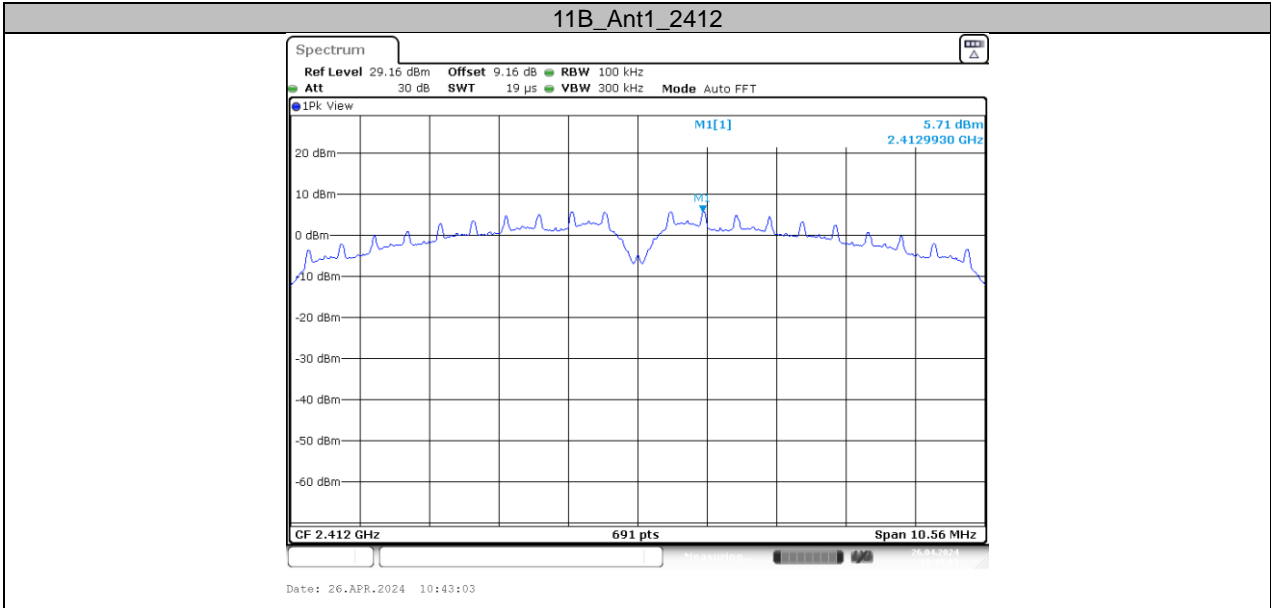


11G_Ant1_2412

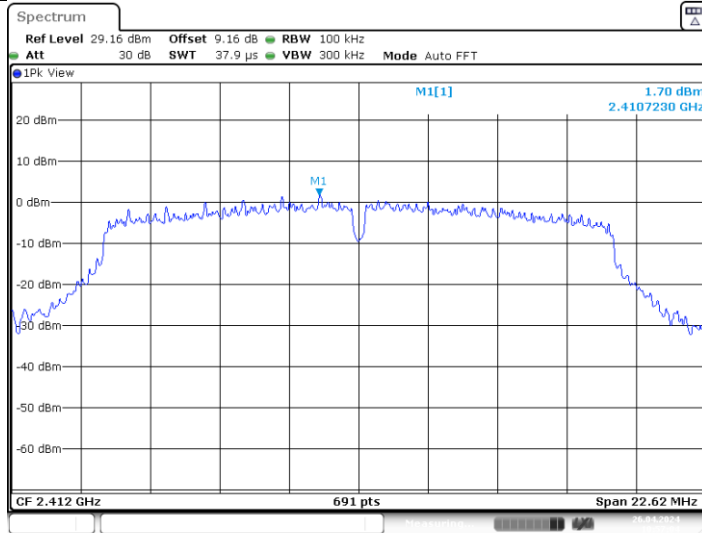


11G_Ant1_2437

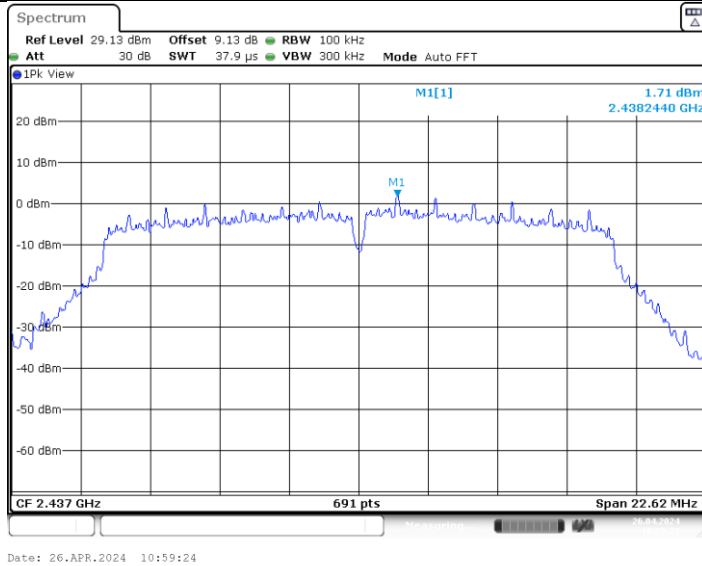


11G_Ant1_2462

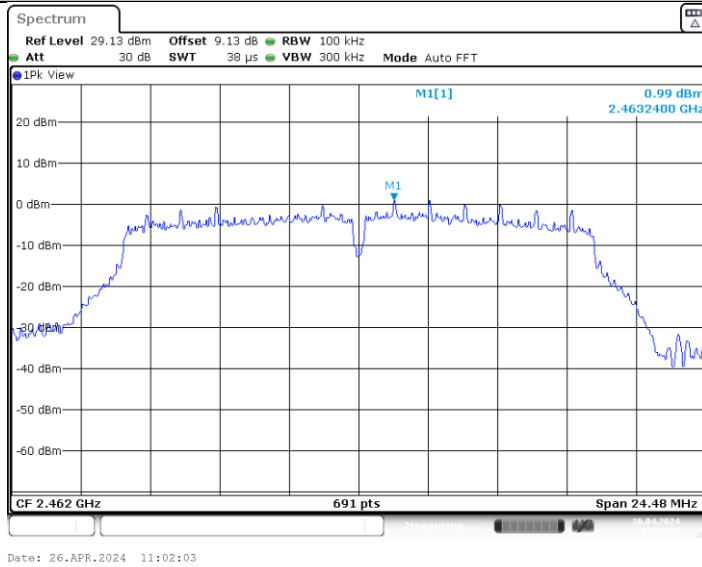


11N20SISO_Ant1_2412

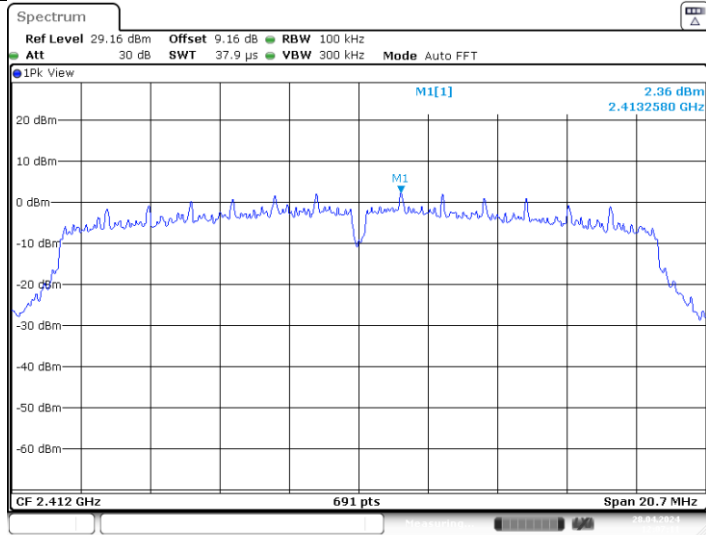


11N20SISO_Ant1_2437

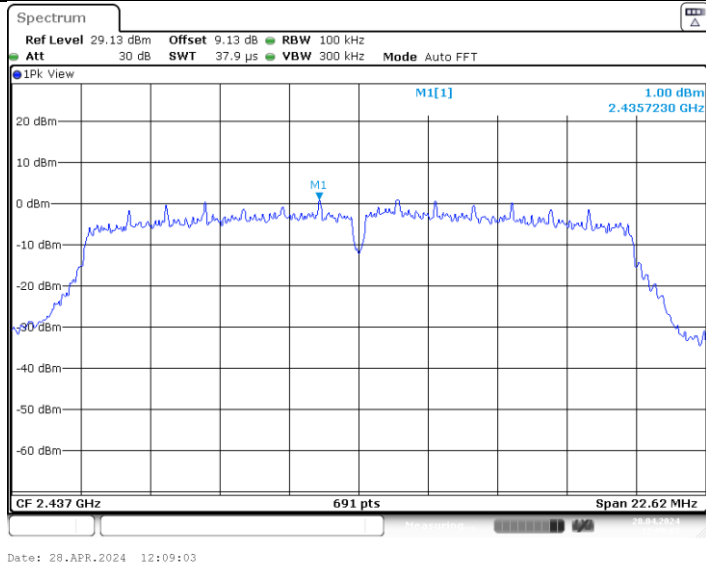

11N20SISO_Ant1_2462

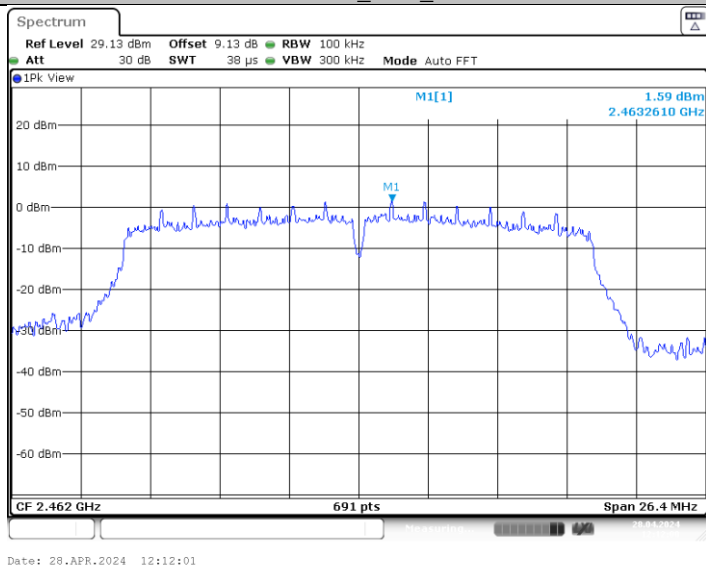


11N40SISO_Ant1_2422

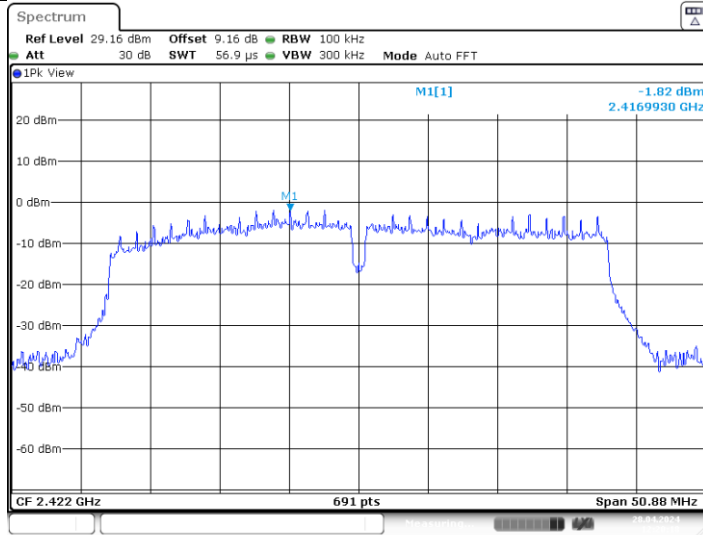


Date: 28.APR.2024 12:20:18

11N40SISO_Ant1_2437

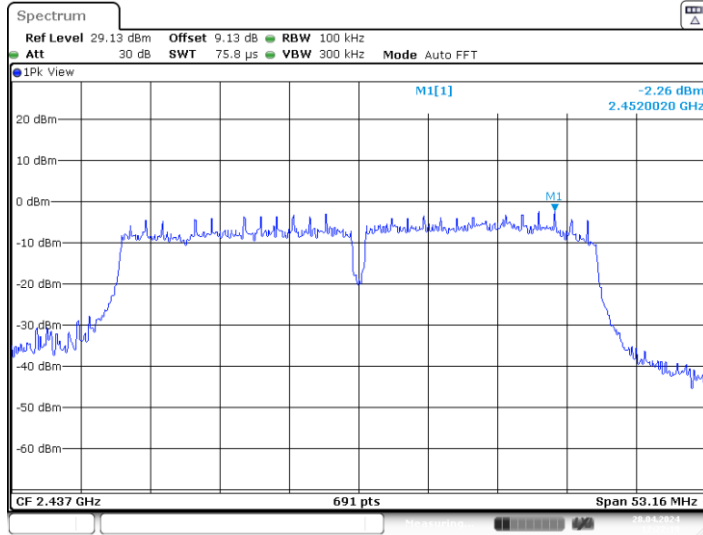

Date: 28.APR.2024 12:22:20

11N40SISO_Ant1_2452

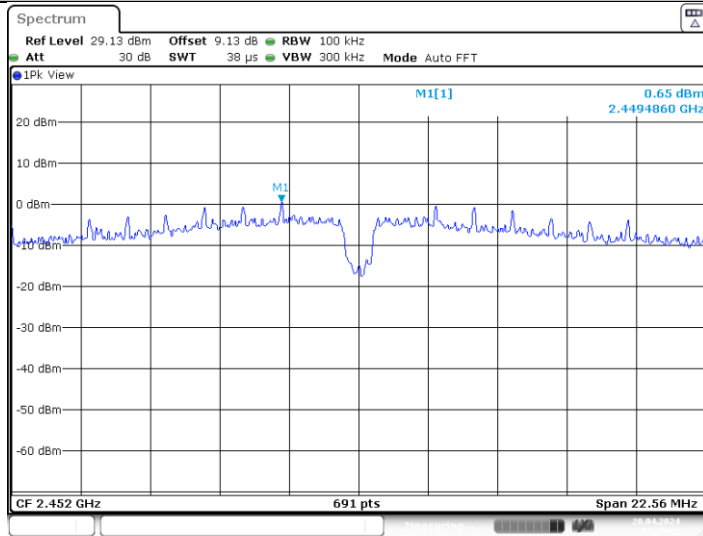

Date: 28.APR.2024 12:25:03


Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Band edge measurements


TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	5.71	-46.04	≤ -24.29	PASS
	High	2462	7.24	-47.53	≤ -22.76	PASS
11G	Low	2412	1.70	-31.27	≤ -28.3	PASS
	High	2462	0.99	-43.24	≤ -29.01	PASS
11N20SISO	Low	2412	2.36	-29.08	≤ -27.64	PASS
	High	2462	1.59	-39.99	≤ -28.41	PASS
11N40SISO	Low	2422	-1.82	-35.01	≤ -31.82	PASS
	High	2452	0.65	-38.61	≤ -29.35	PASS

11B_Ant1_Low_2412

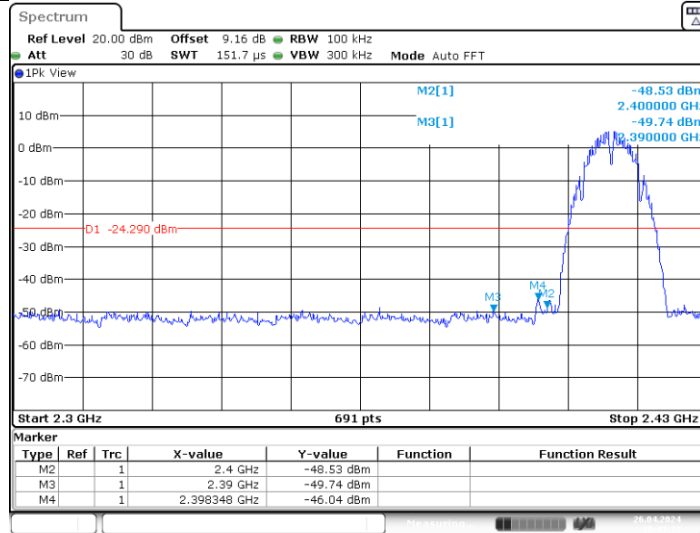


Date: 26.APR.2024 10:43:12

11B_Ant1_High_2462



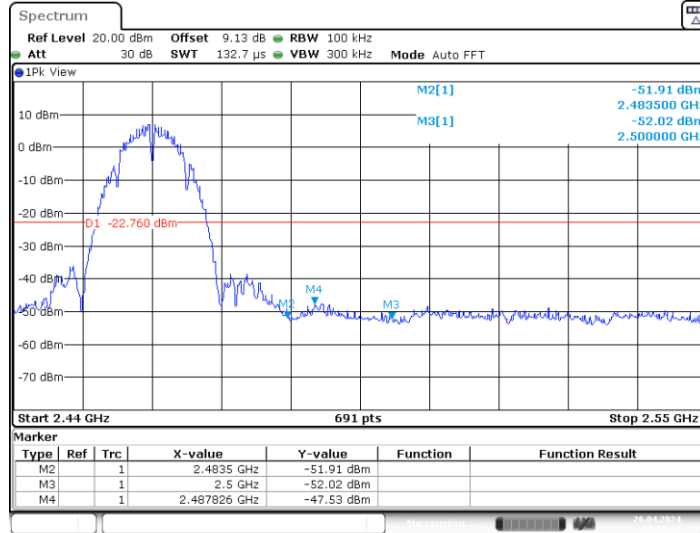


Date: 26.APR.2024 10:53:48


11G_Ant1_Low_2412

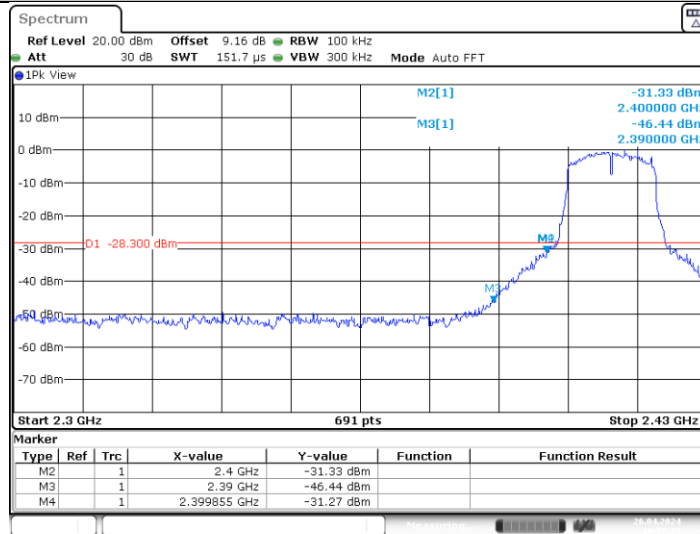


Date: 26.APR.2024 10:57:14

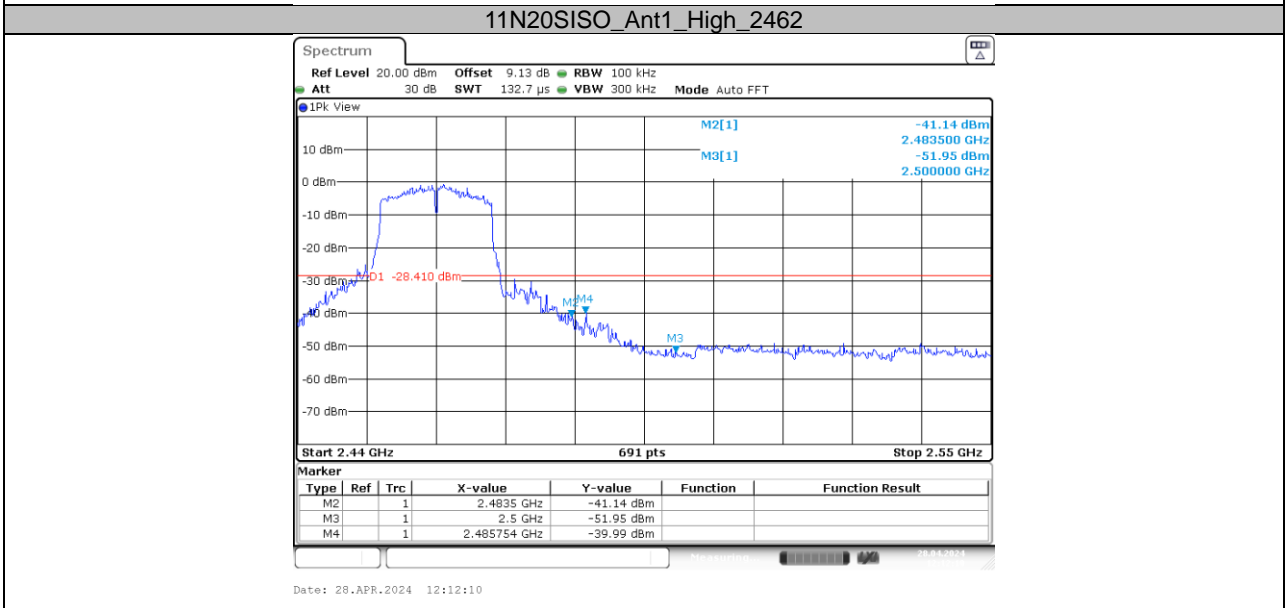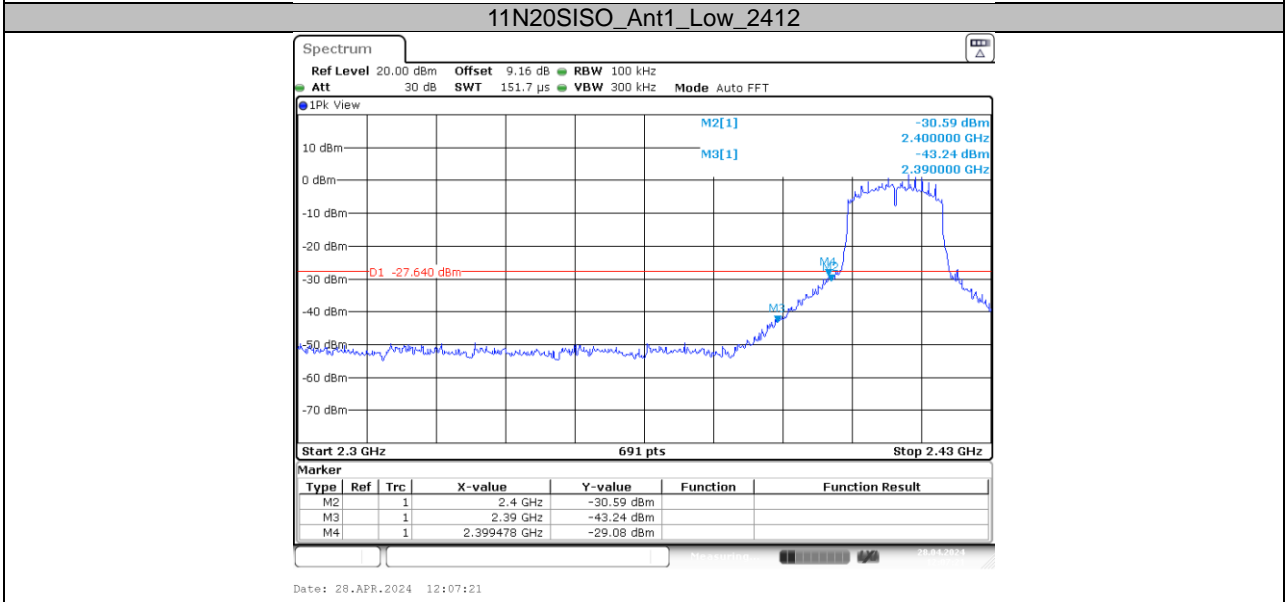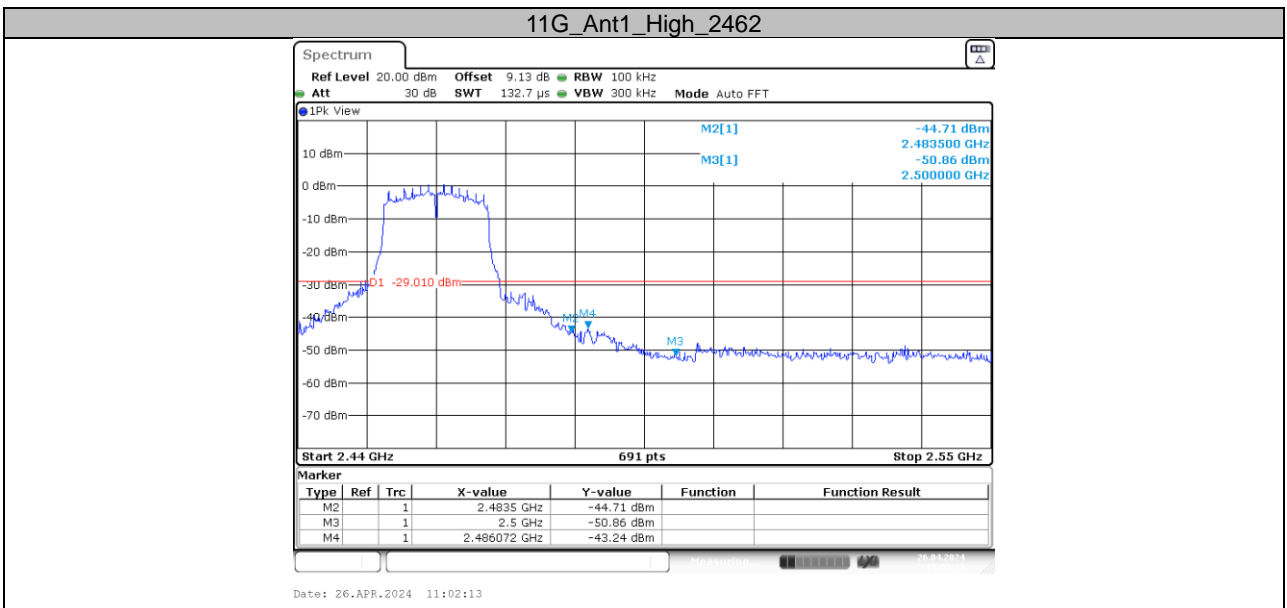

11N40SISO_Ant1_Low_2422

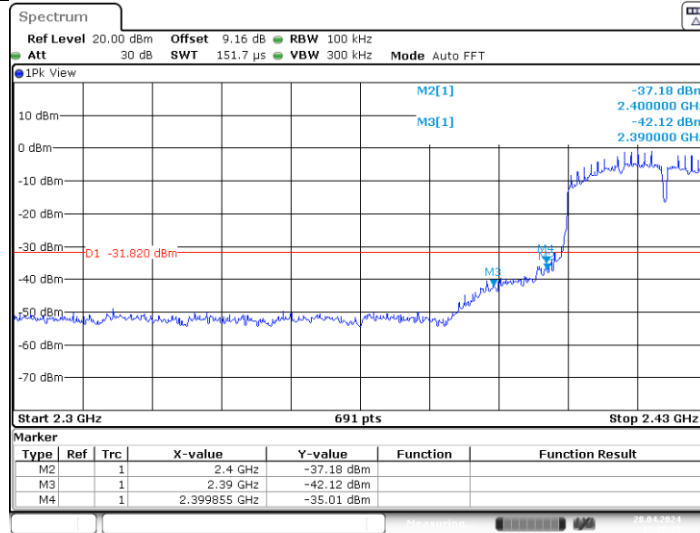


11N40SISO_Ant1_High_2452



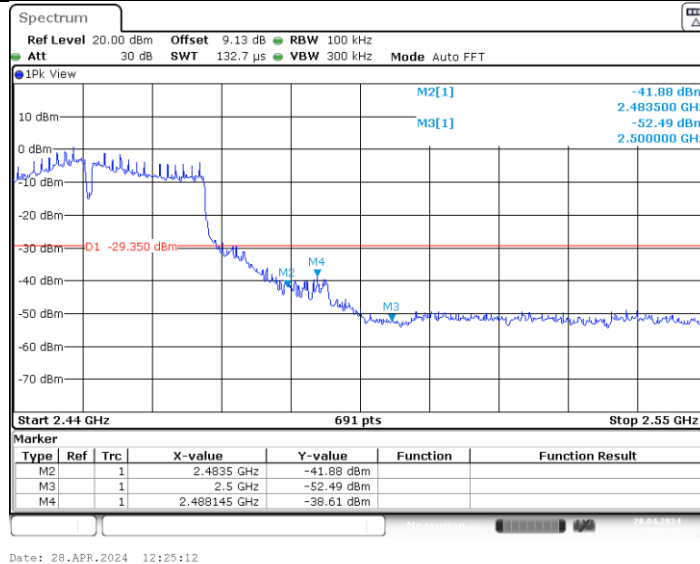





APPENDIXH - POWER SPECTRAL DENSITY

TestMode	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-17.53	≤8.00	PASS
	2437	-18.20	≤8.00	PASS
	2462	-16.90	≤8.00	PASS
11G	2412	-19.71	≤8.00	PASS
	2437	-19.75	≤8.00	PASS
	2462	-19.67	≤8.00	PASS
11N20SISO	2412	-19.26	≤8.00	PASS
	2437	-19.93	≤8.00	PASS
	2462	-20.20	≤8.00	PASS
11N40SISO	2422	-22.05	≤8.00	PASS
	2437	-22.22	≤8.00	PASS
	2452	-20.35	≤8.00	PASS


Test Graphs

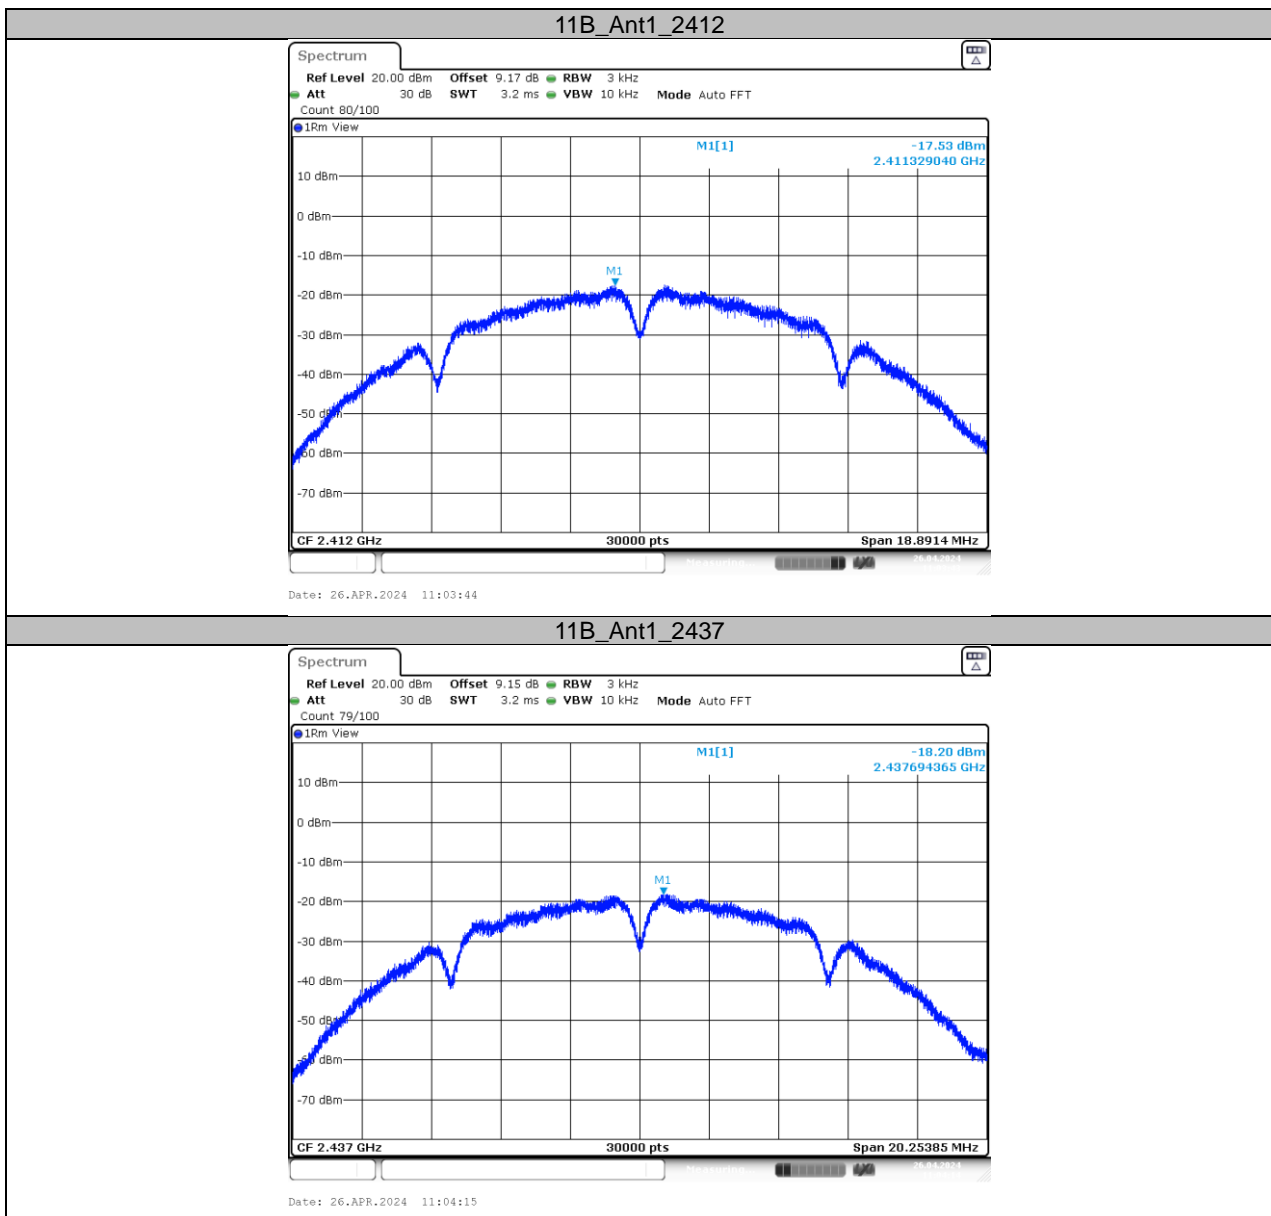

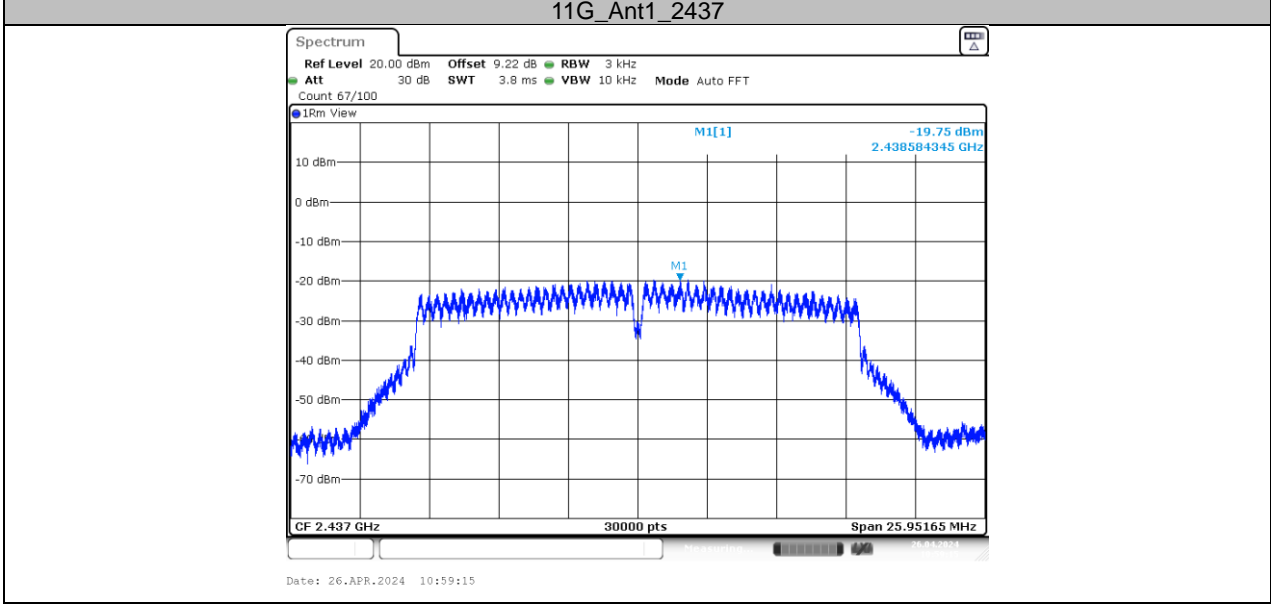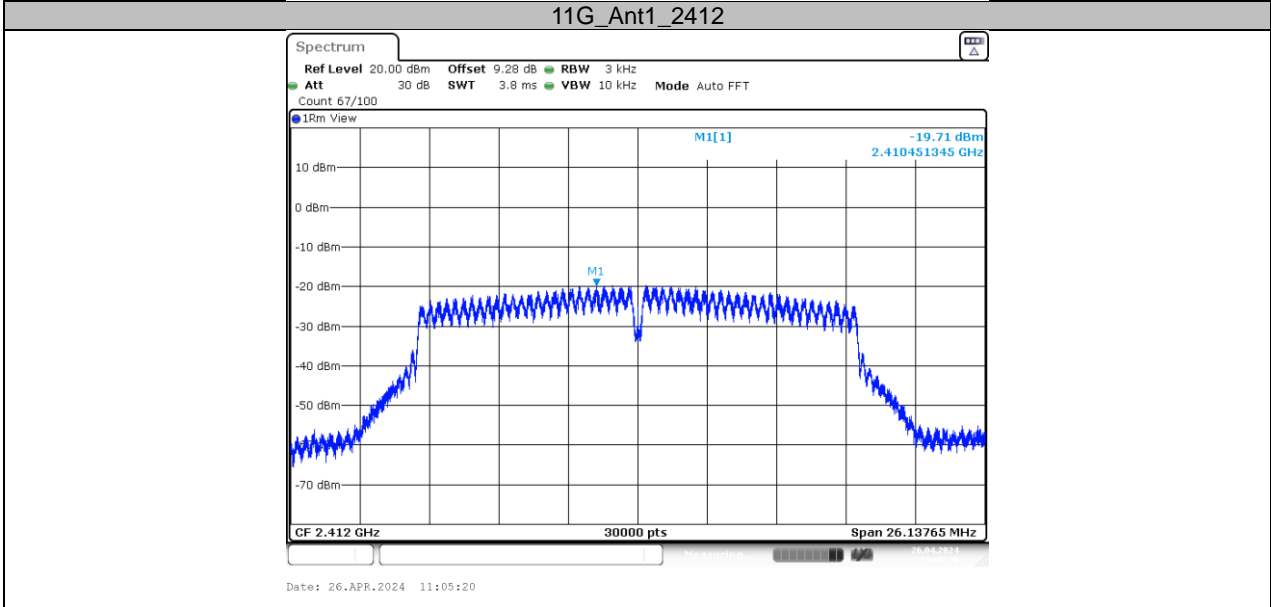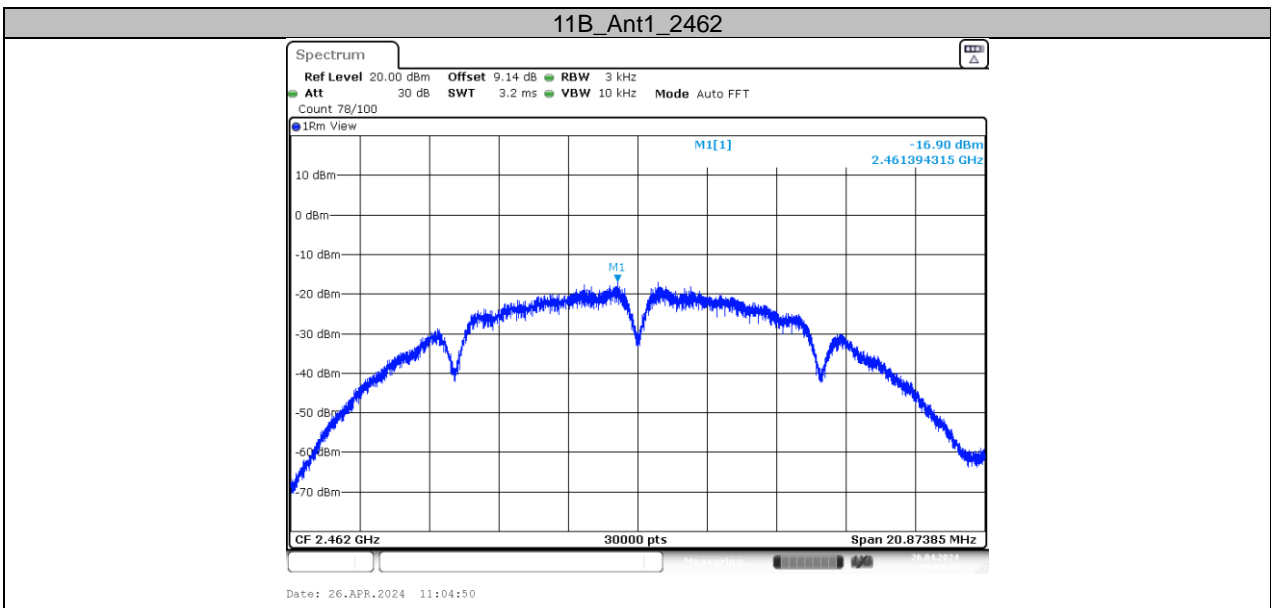

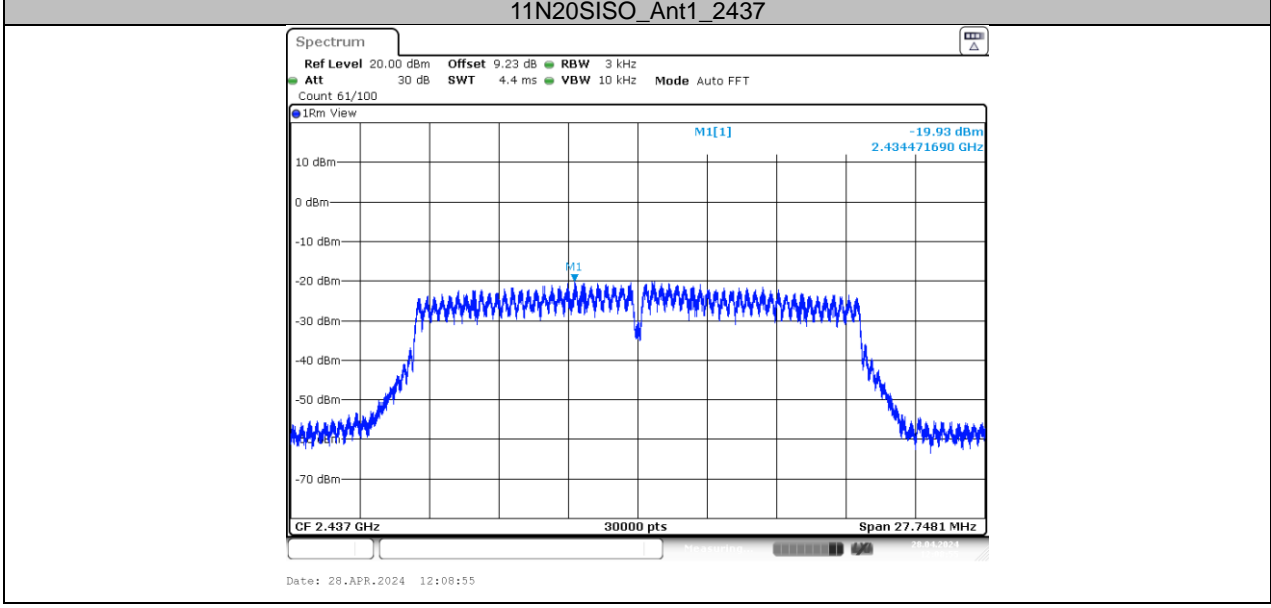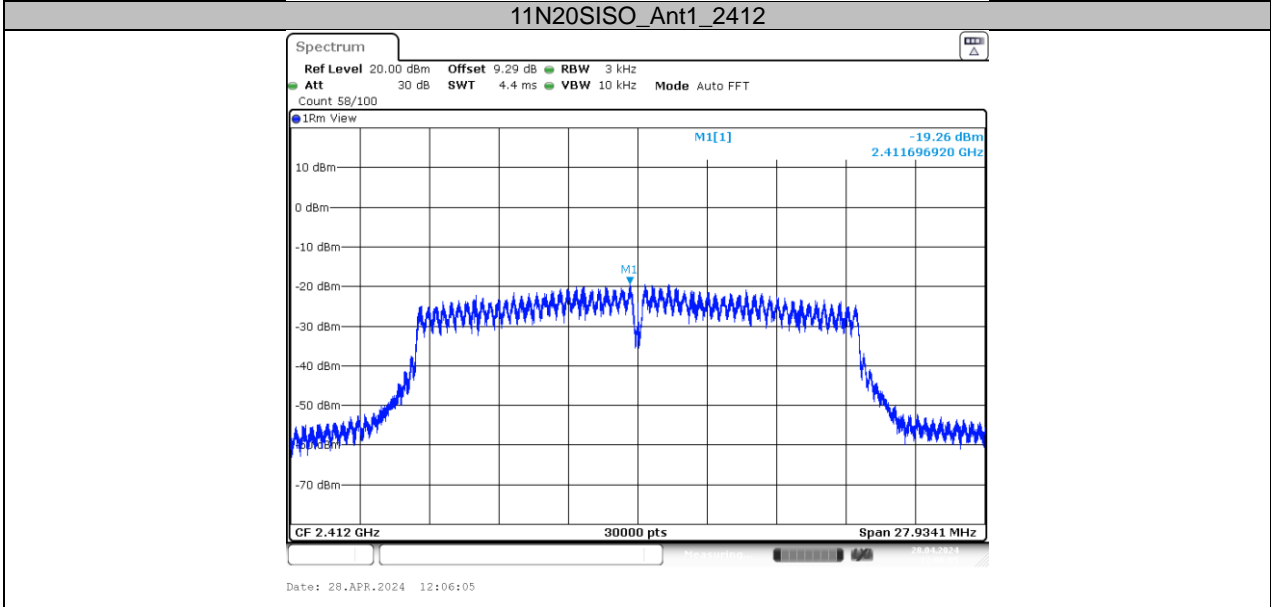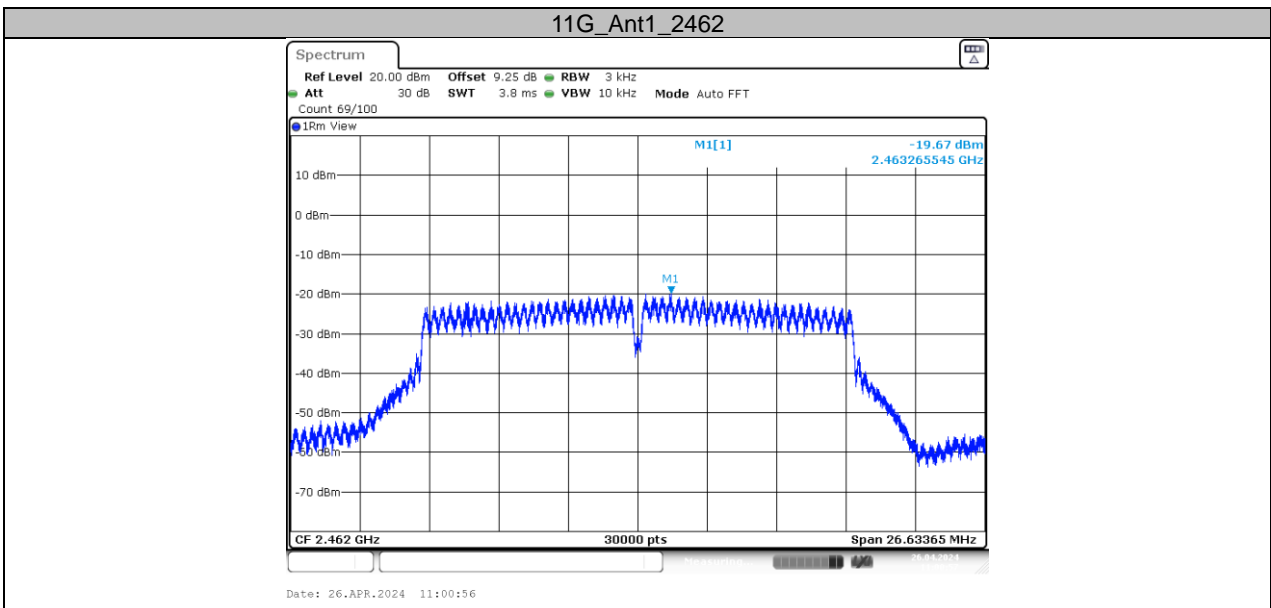


11N20SISO_Ant1_2462

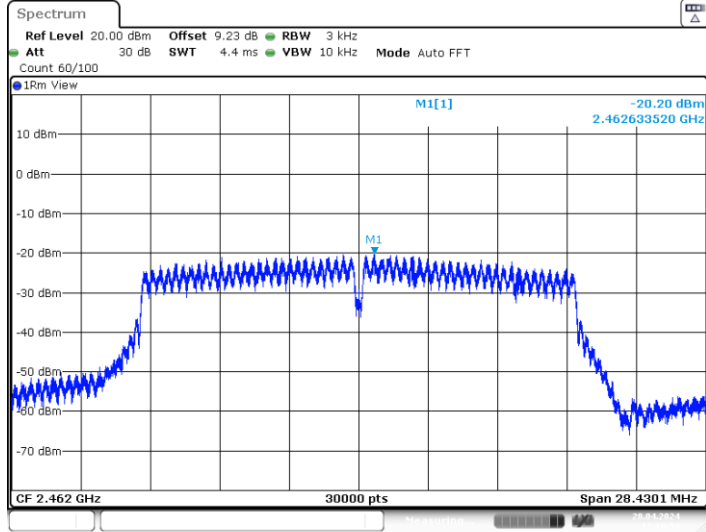


Date: 28.APR.2024 12:10:54

11N40SISO_Ant1_2422

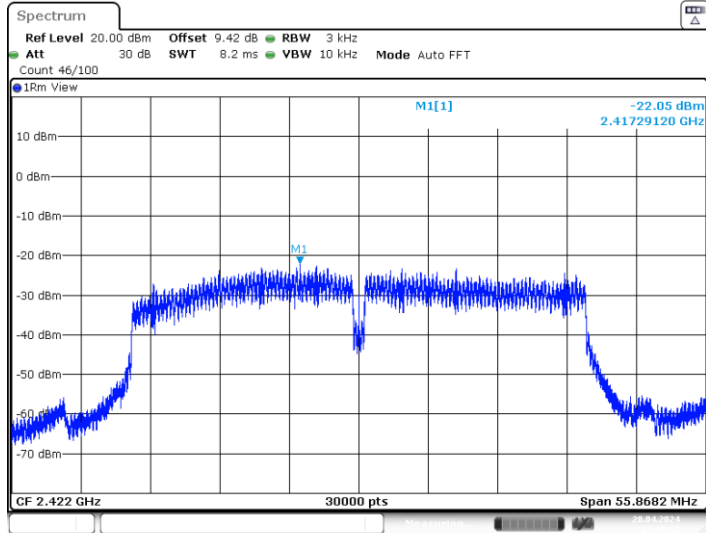


Date: 28.APR.2024 12:19:12

11N40SISO_Ant1_2437

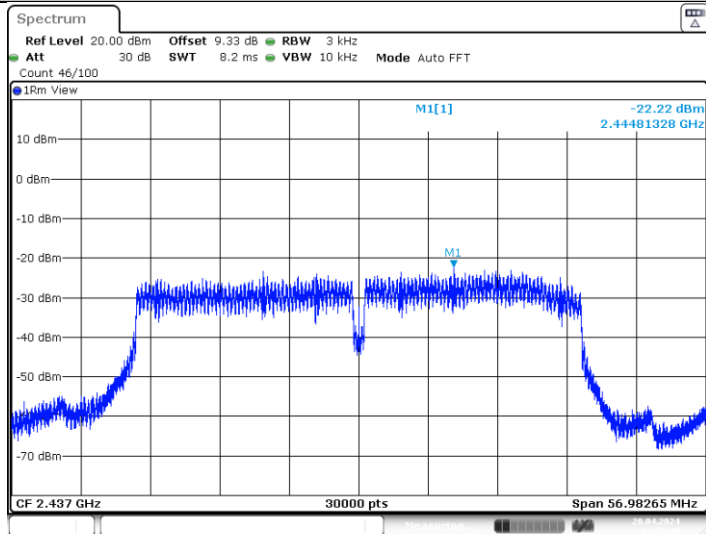

Date: 28.APR.2024 12:22:11

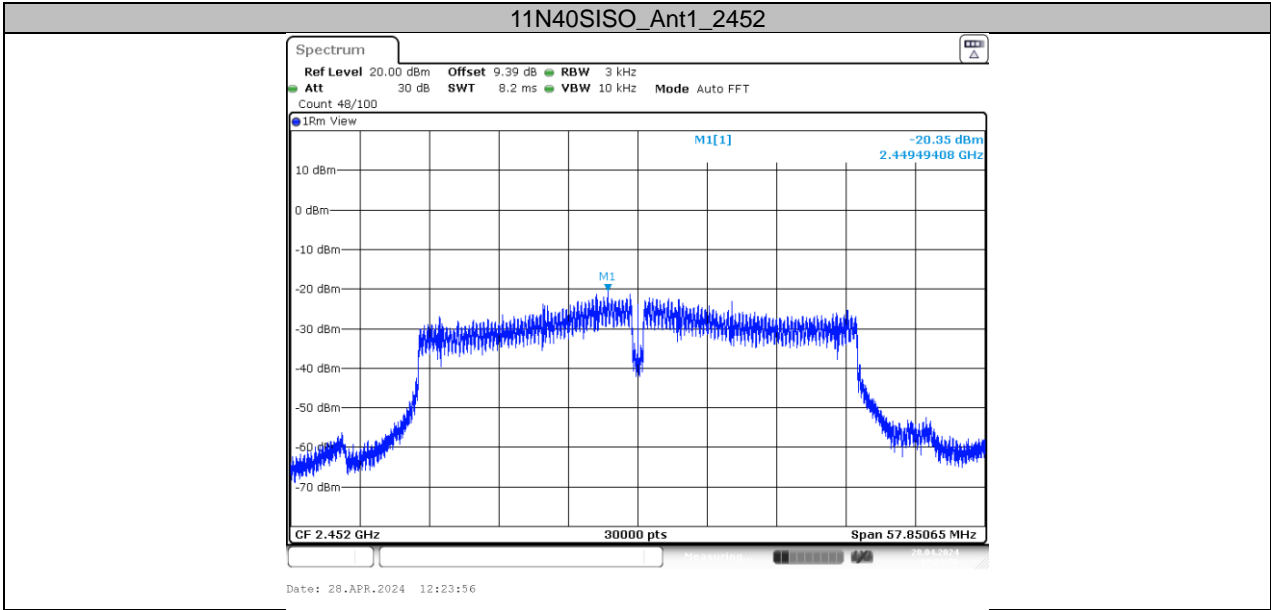

End of Test Report