




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	0.47	30	Pass
NVNT	BLE	2442	Ant1	-0.62	30	Pass
NVNT	BLE	2480	Ant1	-1.018	30	Pass



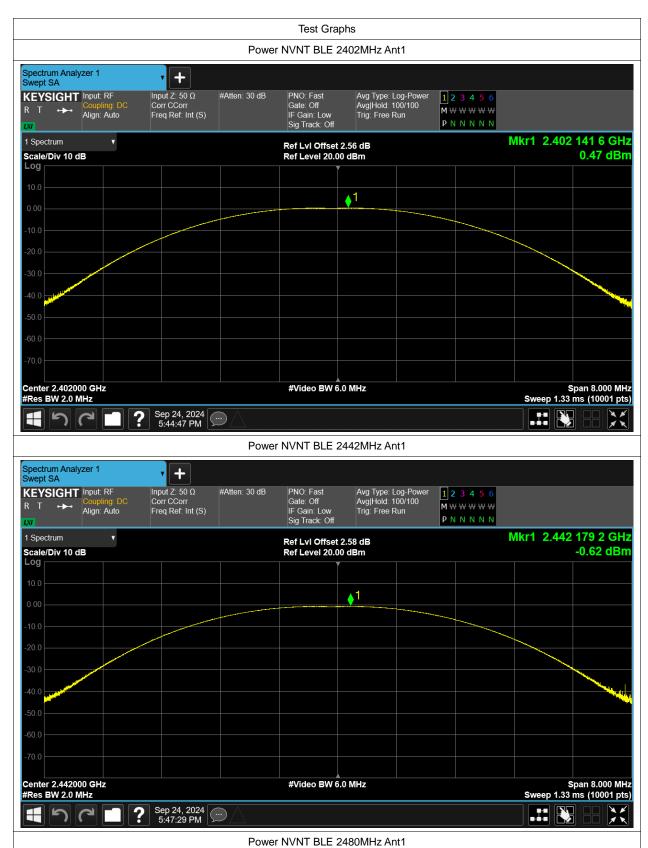



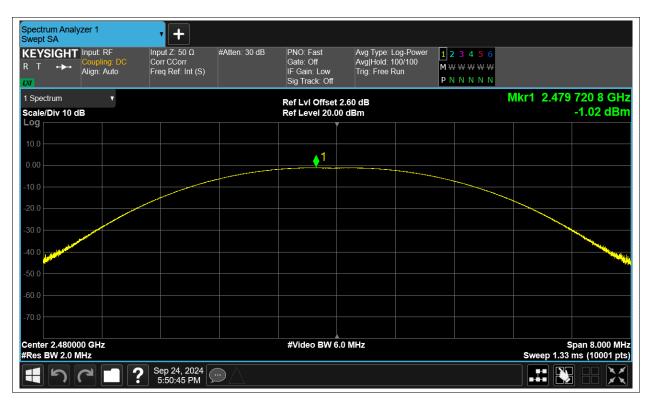





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.625	0.5	Pass
NVNT	BLE	2442	Ant1	0.603	0.5	Pass
NVNT	BLE	2480	Ant1	0.626	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.034	
NVNT	BLE	2442	Ant1	1.036	
NVNT	BLE	2480	Ant1	1.034	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-6.196	8	Pass
NVNT	BLE	2442	Ant1	-7.278	8	Pass
NVNT	BLE	2480	Ant1	-7.67	8	Pass









Tel: +86-755-23118282, Fax: +86-755-23116366







Band Edge

	Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
	NVNT	BLE	2402	Ant1	-53.52	-20	Pass
Ī	NVNT	BLE	2480	Ant1	-54.53	-20	Pass



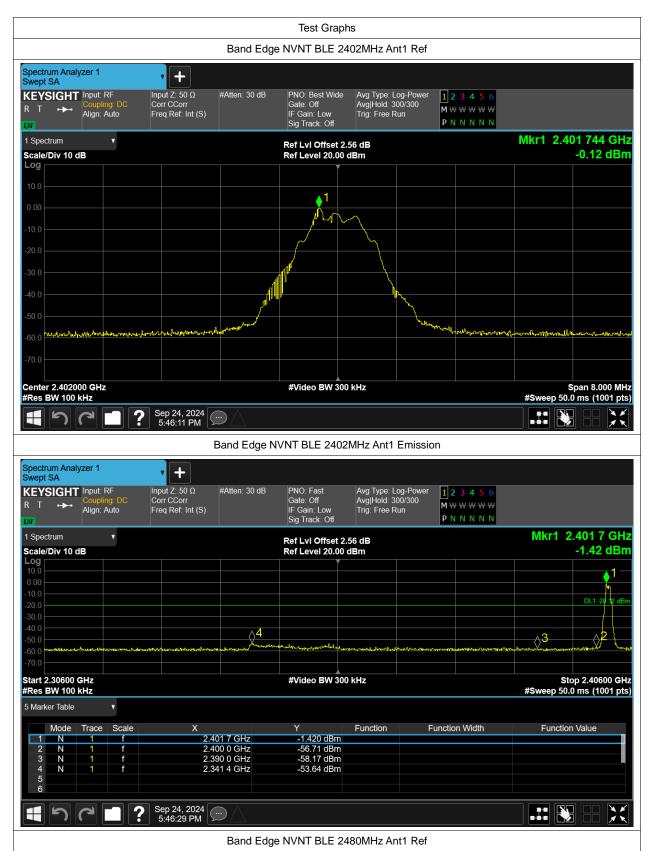



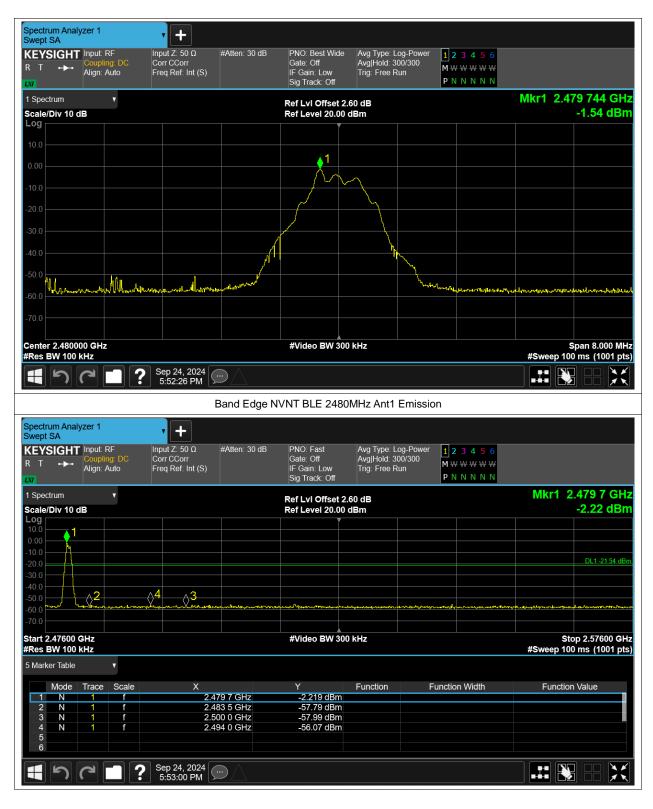





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-47.17	-20	Pass
NVNT	BLE	2442	Ant1	-48.82	-20	Pass
NVNT	BLE	2480	Ant1	-48.05	-20	Pass











