


Product Name: Tablet	Report No: ITEZA202300349RF5
Product Model: R08, R08 Pro, R08S, R08T, R08 Max, R08 Ultra	Security Classification: Open
Version: V1.0	Total Page: 114

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
<i>Aaron Long</i>	<i>Stone Tang</i>	<i>Joky Wang</i>	

FCC Radio Test Report

FCC ID: 2AX4YR08

This report concerns: Original Grant

Equipment : Tablet
Brand Name : DOOGEE
Test Model : R08, R08 Pro, R08S, R08T, R08 Max, R08 Ultra
Series Model : N/A
Applicant : Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address : B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Manufacturer : Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address : B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Date of Receipt : Nov. 07, 2023
Date of Test : Nov. 07, 2023~ Nov. 15, 2023
Issued Date : Nov. 20, 2023
Report Version : V1.0
Test Sample : Engineering Sample No.: 20230227002812
Standard(s) : FCC CFR Title 47, Part 15, Subpart E
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
ANSI C63.10-2013

- The test result referred exclusively to the presented test model /sample.
- Without written approval of TIRT Inc. the test report shall not reproduced except in full.

Lab: Beijing TIRT Technology Service Co.,Ltd Shenzhen

Add: 104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China

TEL: +86-0755-27087573

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST MODES	12
2.3 PARAMETERS OF TEST SOFTWARE	14
2.4 DUTY CYCLE	15
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	30
2.6 SUPPORT UNITS	30
3 . AC POWER LINE CONDUCTED EMISSIONS	31
3.1 LIMIT	31
3.2 TEST PROCEDURE	31
3.3 DEVIATION FROM TEST STANDARD	31
3.4 TEST SETUP	32
3.5 EUT OPERATION CONDITIONS	32
3.6 TEST RESULTS	32
4 . RADIATED EMISSIONS	33
4.1 LIMIT	33
4.2 TEST PROCEDURE	33
4.3 DEVIATION FROM TEST STANDARD	35
4.4 TEST SETUP	35
4.5 EUT OPERATION CONDITIONS	36
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	36
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	36
4.8 TEST RESULTS - ABOVE 1000 MHZ	36
5 . BANDWIDTH	37
5.1 LIMIT	37
5.2 TEST PROCEDURE	37
5.3 DEVIATION FROM STANDARD	37
5.4 TEST SETUP	38
5.5 EUT OPERATION CONDITIONS	38

Table of Contents	Page
5.6 TEST RESULTS	38
6 . MAXIMUM OUTPUT POWER	39
6.1 LIMIT	39
6.2 TEST PROCEDURE	40
6.3 DEVIATION FROM STANDARD	40
6.4 TEST SETUP	40
6.5 EUT OPERATION CONDITIONS	40
6.6 TEST RESULTS	40
7 . POWER SPECTRAL DENSITY	41
7.1 LIMIT	41
7.2 TEST PROCEDURE	41
7.3 DEVIATION FROM STANDARD	41
7.4 TEST SETUP	42
7.5 EUT OPERATION CONDITIONS	42
7.6 TEST RESULTS	42
8 . FREQUENCY STABILITY	43
8.1 LIMIT	43
8.2 TEST PROCEDURE	43
8.3 DEVIATION FROM STANDARD	43
8.4 TEST SETUP	43
8.5 EUT OPERATION CONDITIONS	43
8.6 TEST RESULTS	43
9 . MEASUREMENT INSTRUMENTS LIST	44
10 . EUT TEST PHOTOS	46
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	48
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	50
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	51
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	53
APPENDIX E - BANDWIDTH	64
APPENDIX F - MAXIMUM OUTPUT POWER	99
APPENDIX G - POWER SPECTRAL DENSITY	100

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
ITEZA202300349RF5	V1.0	Original Report.	Nov. 21, 2023	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	NOTE (5)
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - Outdoor access point device
 - Indoor access point device
 - Fixed point-to-point access points device
 - Client device
- (5) The manufacturer states that the frequency sability is in compliance with 15.407(g).

1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab. Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The TIRT measurement uncertainty as below table:

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temperature	±0.7°C
Time	±1.25%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25.1°C	52%	AC 120V/60Hz	Stone Tang
Radiated Emissions-9kHz to 30MHz	24.5°C	50%	AC 120V/60Hz	Stone Tang
Radiated Emissions-30MHz to 1000MHz	24.2°C	53%	AC 120V/60Hz	Stone Tang
Radiated Emissions-Above 1000 MHz	26.0°C	53%	AC 120V/60Hz	Stone Tang
Bandwidth	25.0°C	56%	AC 120V/60Hz	Stone Tang
Maximum Output Power	24.9°C	54%	AC 120V/60Hz	Stone Tang
Power Spectral Density	25.1°C	62%	AC 120V/60Hz	Stone Tang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet
Brand Name	DOOGEE
Test Model	R08, R08 Pro, R08S, R08T, R08 Max, R08 Ultra
Series Model	N/A
Model Difference(s)	There is no difference except the name of the model
Software Version	DOOGEE-R08-EEA-Android13.0-20231109
Hardware Version	WT_P101_8788_BJJ_MB_V0.1_20230920
Power Source	DC voltage supplied from AC/DC adapter.
Power Rating	DC 3.8V from battery or DC 5V from adapter
Operation Frequency Band(s)	UNII-1: 5180 MHz ~ 5240 MHz UNII-2A: 5260 MHz ~ 5320 MHz UNII-3: 5745 MHz ~ 5825 MHz
Modulation Type	IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)
Maximum Output Power _UNII-1	IEEE 802.11n40: 14.22 dBm (0.026424 W)
Maximum Output Power _UNII-2A	IEEE 802.11ac80: 14.98 dBm (0.031477 W)
Maximum Output Power _UNII-3	IEEE 802.11n20: 15.44 dBm (0.034995 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	PT3	PIFA	N/A	2.7

Note:

- 1) The antenna gain is provided by the manufacturer.
- 2) The antenna is for testing purposes only.

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 10	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 13	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 14	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 15	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 16	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 17	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 18	TX AC(VHT80) Mode Channel 58 (UNII-2A)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 24	TX AC(VHT80) Mode Channel 155 (UNII-3)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 24	TX AC(VHT80) Mode Channel 155 (UNII-3)

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 10	TX AC(VHT80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 10	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX N(HT40) Mode Channel 36 (UNII-1) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11n(HT20) mode, IEEE 802.11n(HT40) mode, IEEE 802.11ac(VHT80) mode, only the worst cases are documented for other test items.

2.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	AQCT		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	16	16	16
IEEE 802.11n(HT20)	16	16	16
IEEE 802.11ac(VHT20)	16	16	16
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	16	16	
IEEE 802.11ac(VHT40)	16	16	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	16		

UNII-1			
Test Software Version	AQCT		
Frequency (MHz)	5260	5280	5320
IEEE 802.11a	16	16	16
IEEE 802.11n(HT20)	16	16	16
IEEE 802.11ac(VHT20)	16	16	16
Frequency (MHz)	5270	5310	
IEEE 802.11n(HT40)	16	16	
IEEE 802.11ac(VHT40)	16	16	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	16		

UNII-3			
Test Software Version	AQCT		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	16	16	16
IEEE 802.11n(HT20)	16	16	16
IEEE 802.11ac(VHT20)	16	16	16
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	16	16	
IEEE 802.11ac(VHT40)	16	16	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	16		

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.





If duty cycle is $< 98\%$, duty factor shall be considered.


The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	5.11	5.43	94.11
		5200	5.10	5.51	92.56
		5240	5.11	5.42	94.28
		5260	5.10	5.40	94.44
		5280	5.10	5.47	93.24
		5320	5.10	5.46	93.41
		5745	1.73	2.14	80.84
		5785	1.72	2.08	82.69
		5825	5.11	5.43	94.11
11N20SISO	Ant1	5180	1.61	1.98	81.31
		5200	4.73	5.07	93.29
		5240	4.74	5.11	92.76
		5260	4.74	5.09	93.12
		5280	4.74	5.11	92.76
		5320	4.73	5.13	92.20
		5745	4.73	5.10	92.75
		5785	1.62	2.01	80.60
		5825	1.61	1.92	83.85
11N40SISO	Ant1	5190	4.55	4.85	93.81
		5230	4.56	4.94	92.31
		5270	4.56	4.90	93.06
		5310	4.56	4.86	93.83
		5755	4.56	5.00	91.20
		5795	3.06	3.45	88.70
11AC20SISO	Ant1	5180	4.74	5.12	92.58
		5200	1.62	2.04	79.41
		5240	4.73	5.11	92.56
		5260	4.74	5.11	92.76
		5280	4.74	5.11	92.76
		5320	4.74	5.12	92.58
		5745	4.74	5.13	92.40
		5785	4.74	6.84	69.30
		5825	4.74	5.06	93.68
11AC40SISO	Ant1	5190	4.56	5.04	90.48
		5230	3.06	3.71	82.48
		5270	4.58	4.98	91.97
		5310	4.56	4.86	93.83
		5755	4.56	4.86	93.83
		5795	4.56	4.84	94.21
11AC80SISO	Ant1	5210	5.26	5.60	93.93
		5290	0.38	0.80	47.50
		5775	0.39	0.81	48.15

Test Graphs

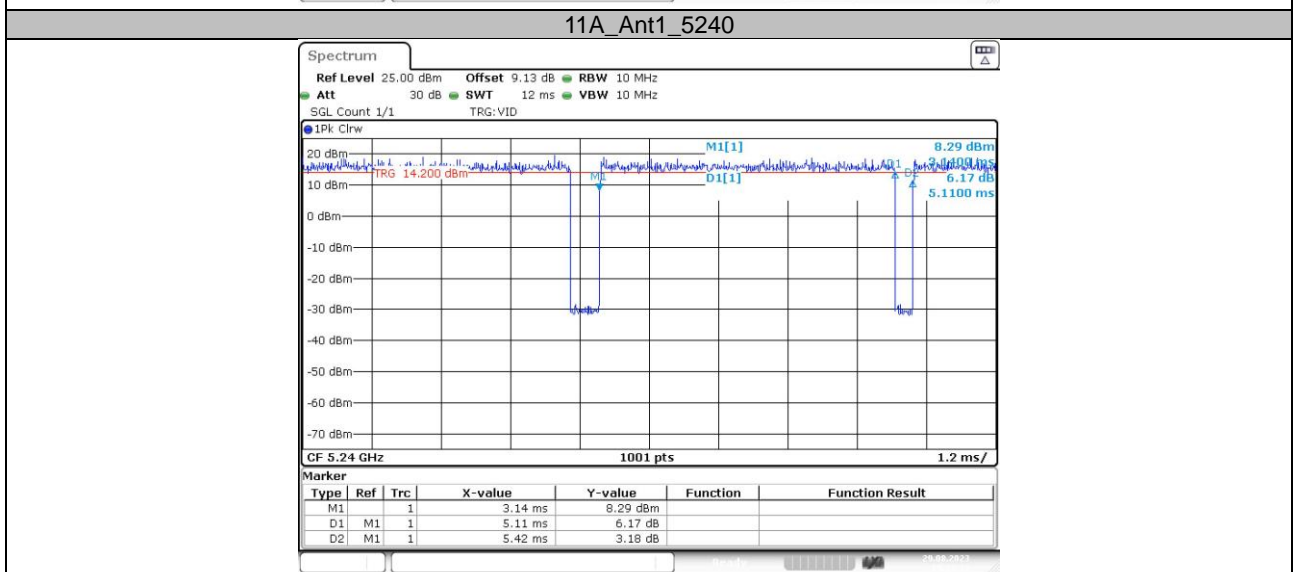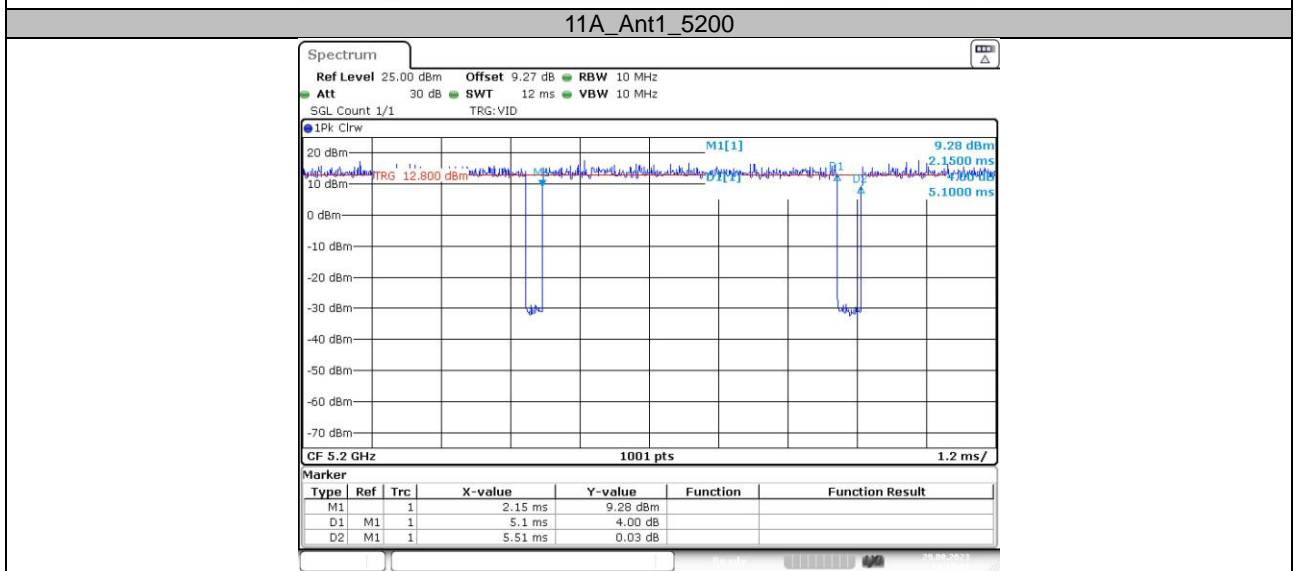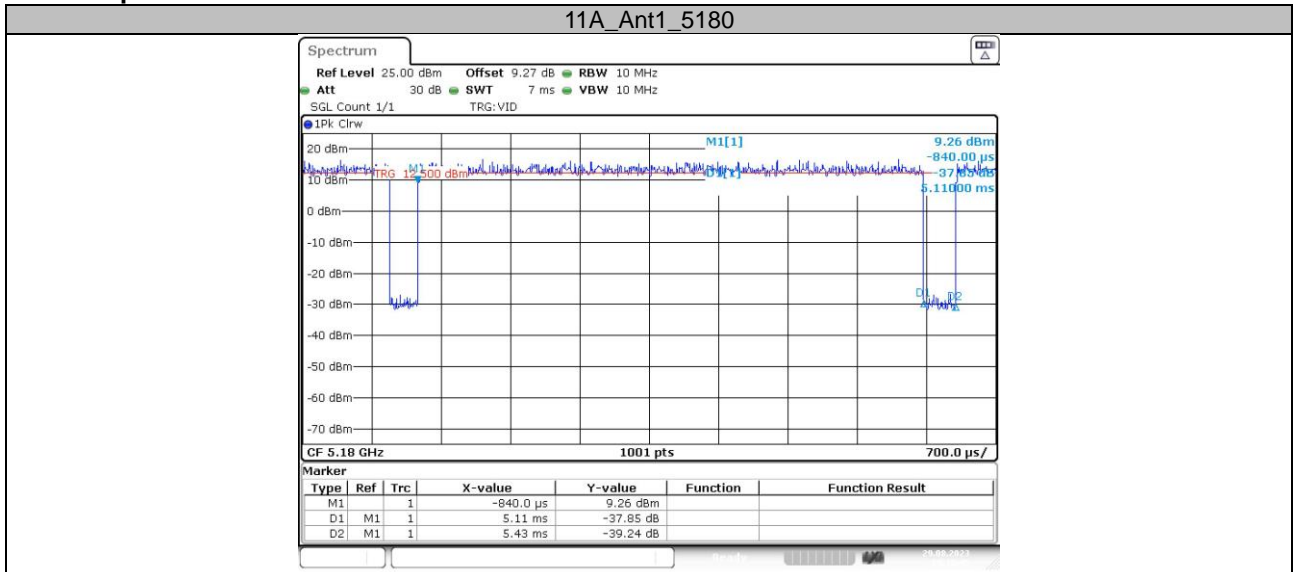


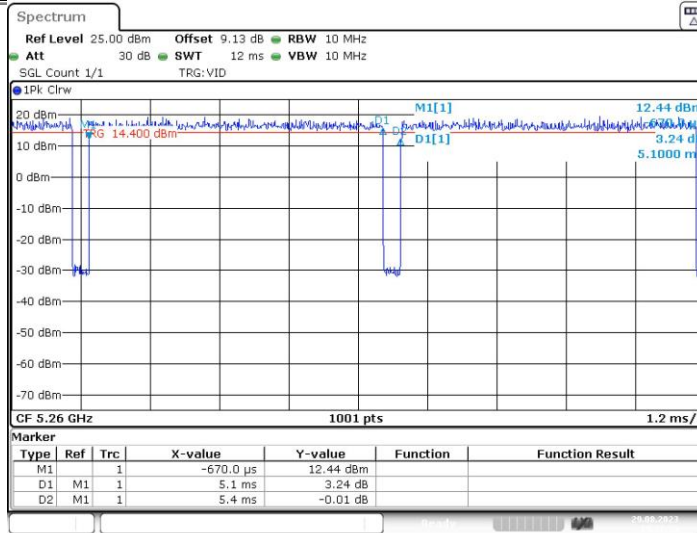


11A_Ant1_5280

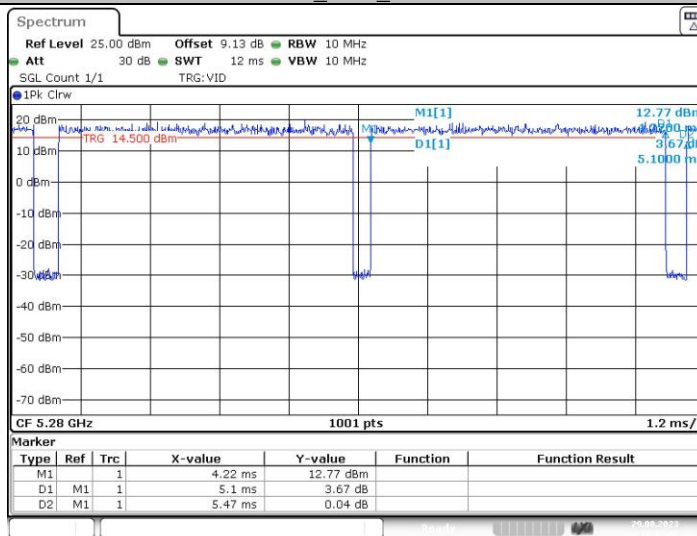


11A_Ant1_5320

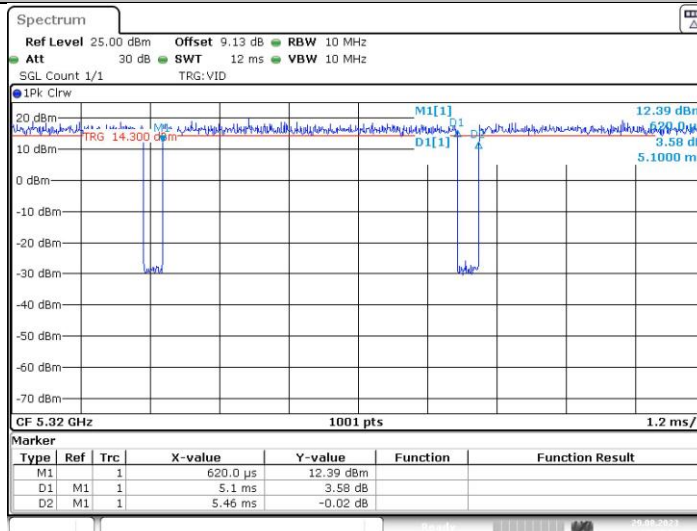


11A_Ant1_5745

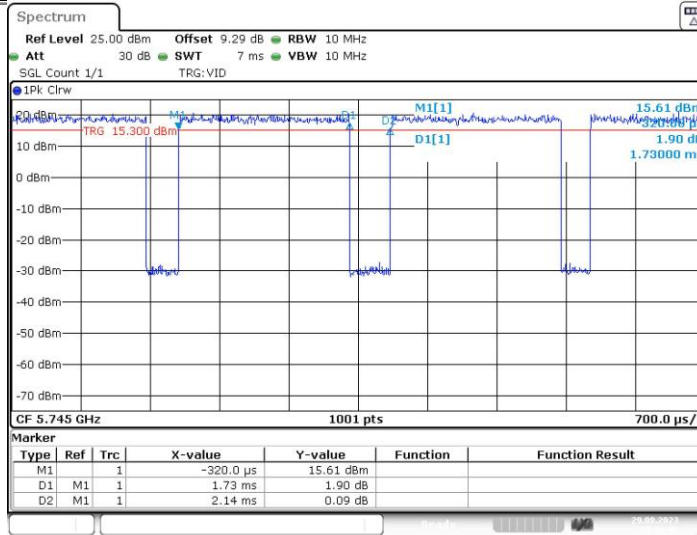


11A_Ant1_5785

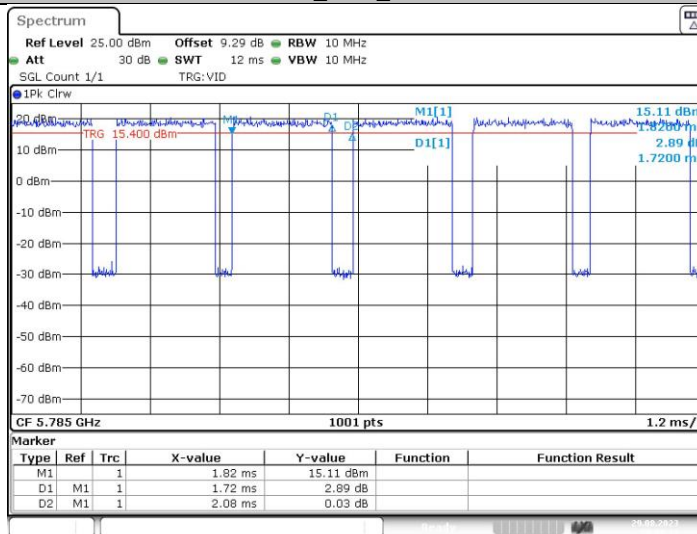


11A_Ant1_5825

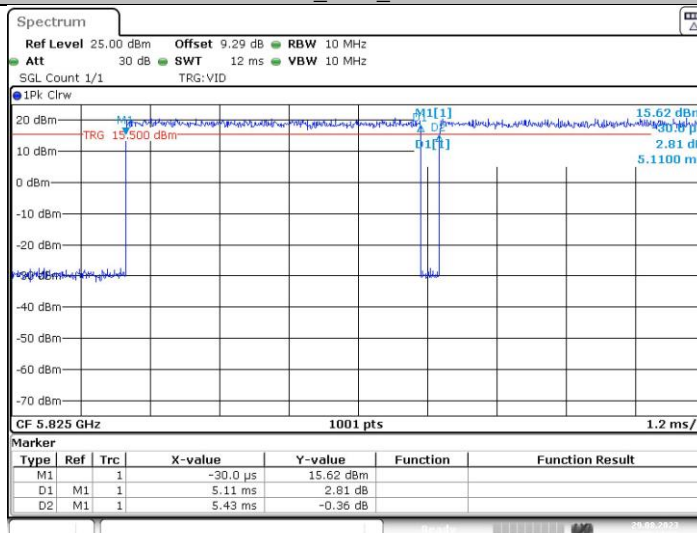


11N20SISO_Ant1_5180

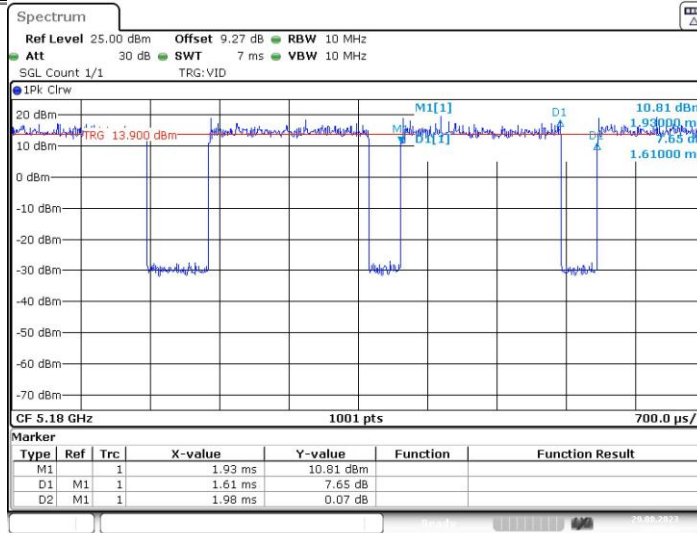


11N20SISO_Ant1_5200

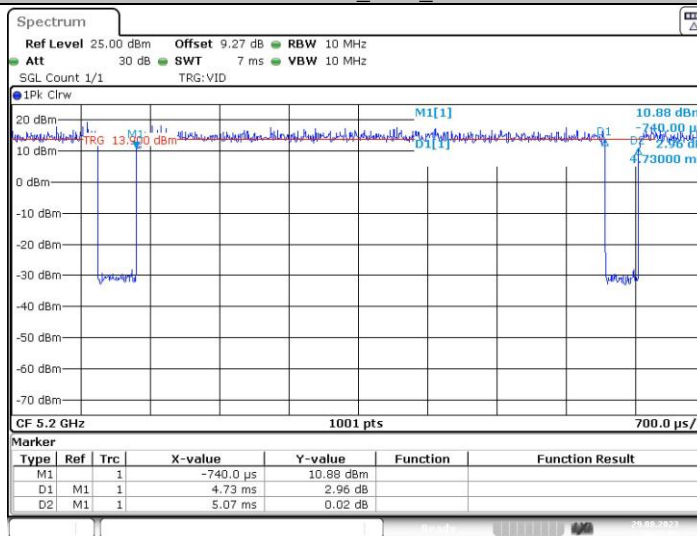


11N20SISO_Ant1_5240

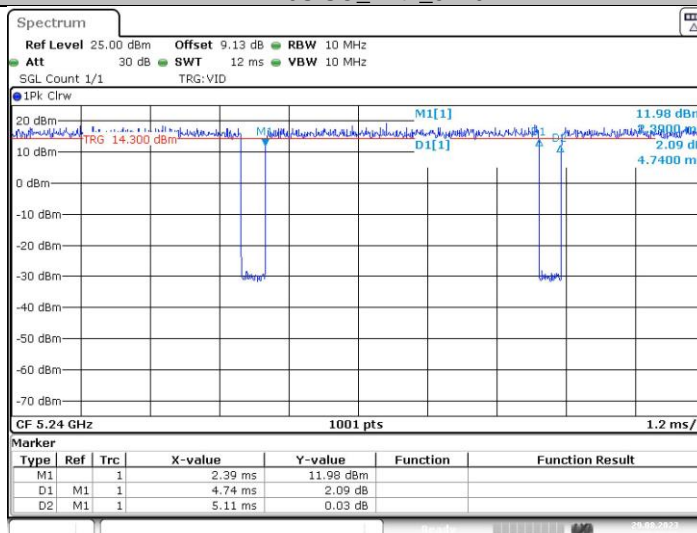


11N20SISO_Ant1_5260

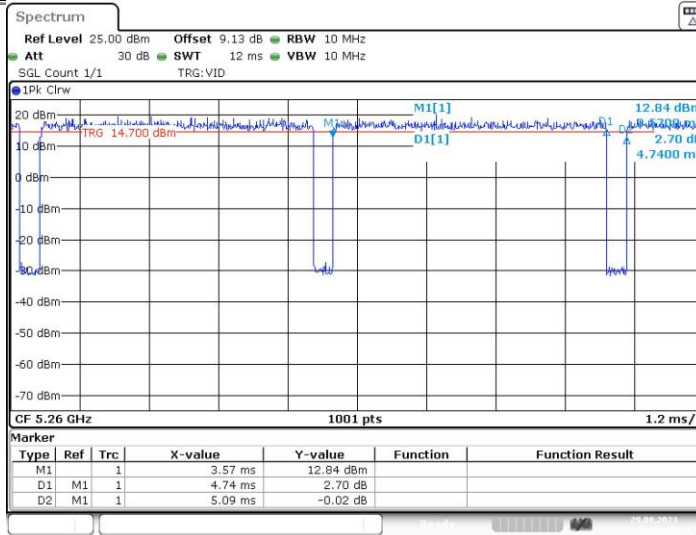


11N20SISO_Ant1_5280

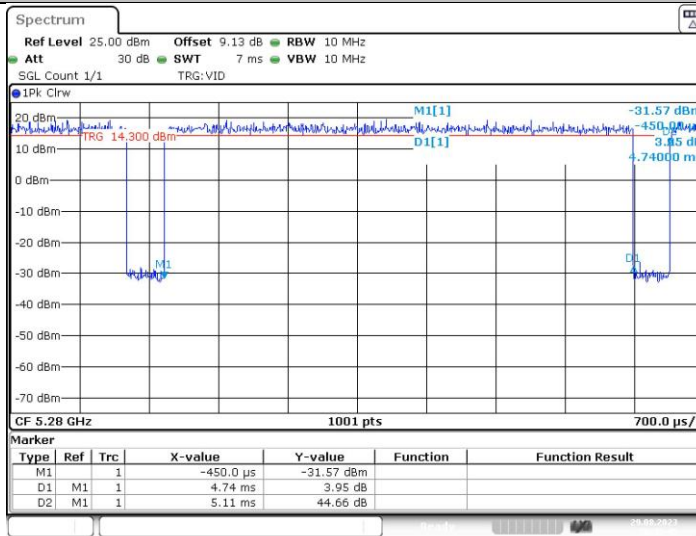


11N20SISO_Ant1_5320

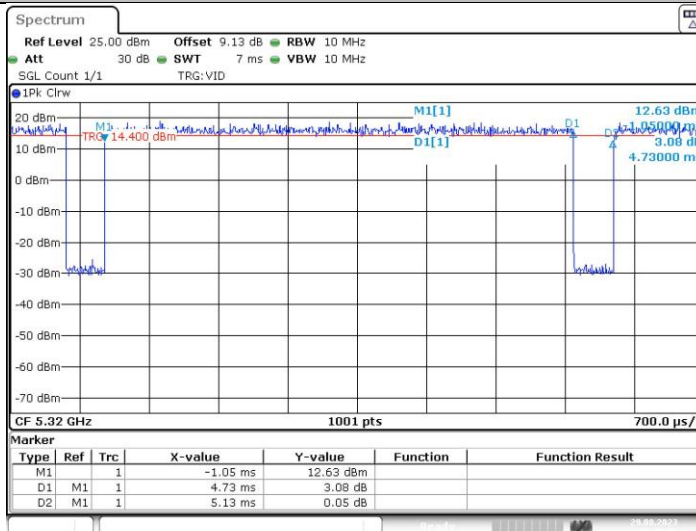


11N20SISO_Ant1_5745

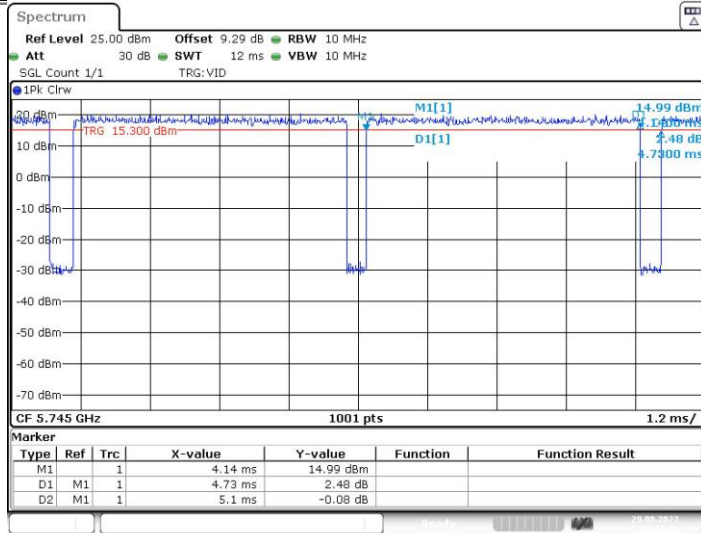


11N20SISO_Ant1_5785

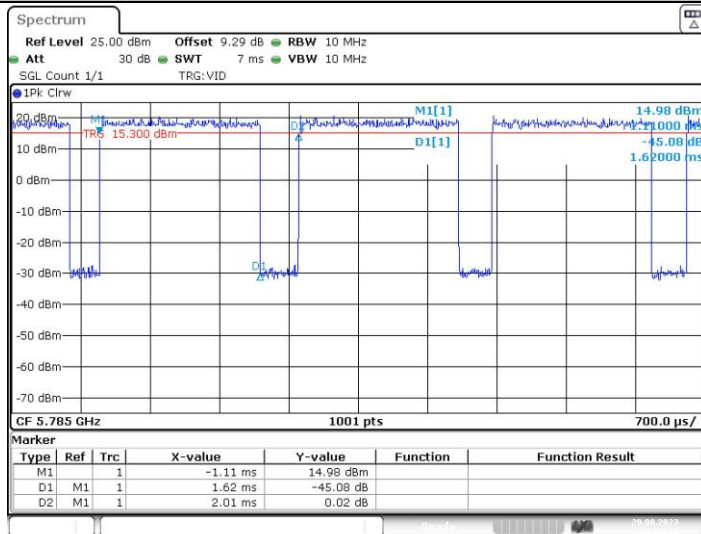


11N20SISO_Ant1_5825

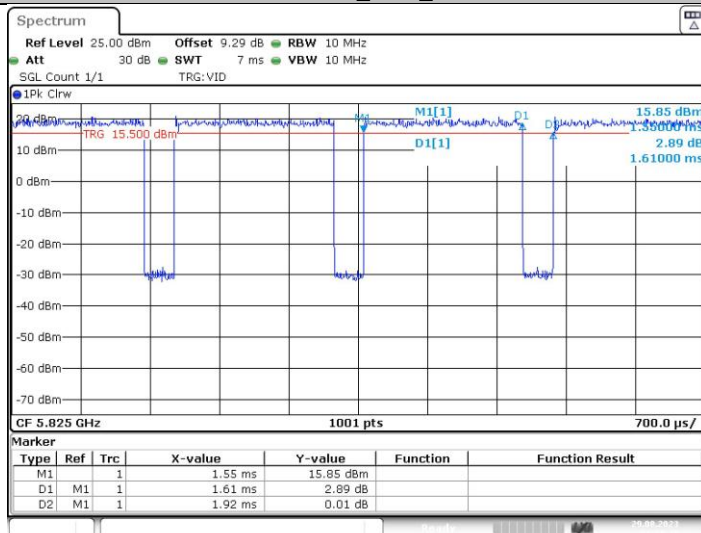


11N40SISO_Ant1_5190

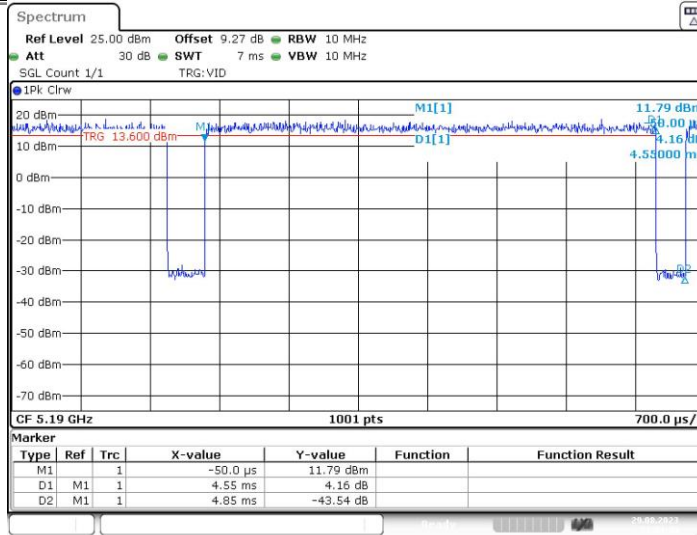


11N40SISO_Ant1_5230

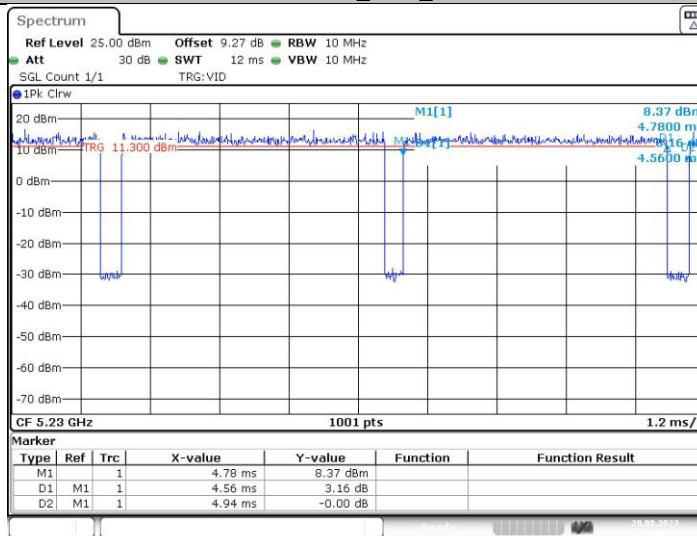


11N40SISO_Ant1_5270

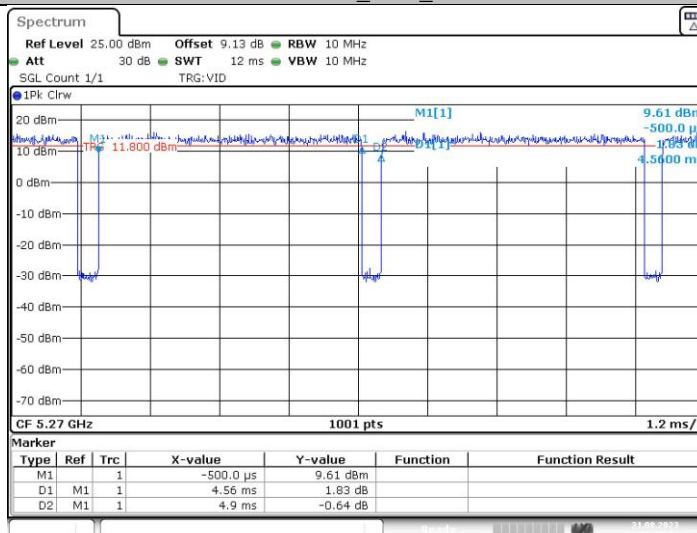


11N40SISO_Ant1_5310

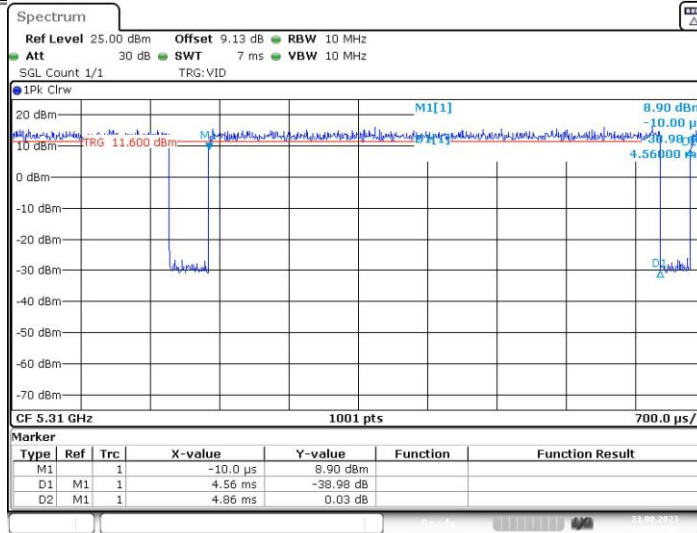


11N40SISO_Ant1_5755

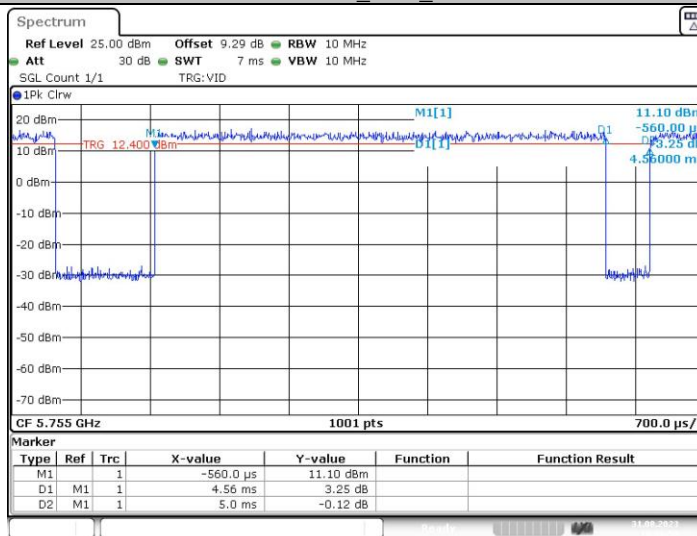


11N40SISO_Ant1_5795

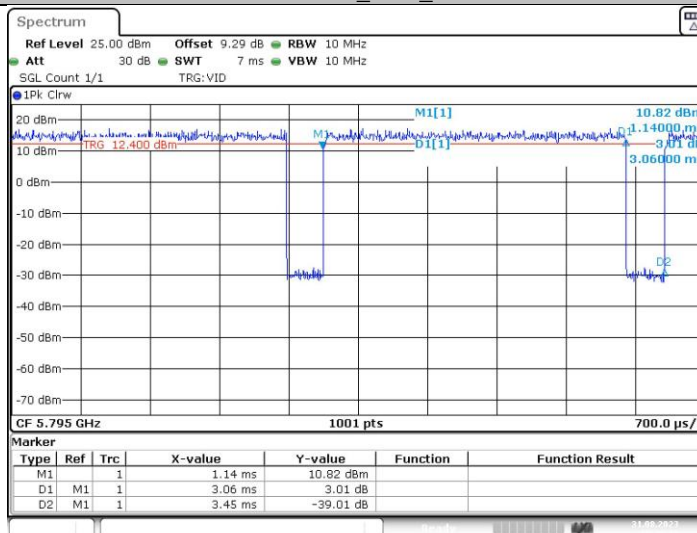


11AC20SISO_Ant1_5180

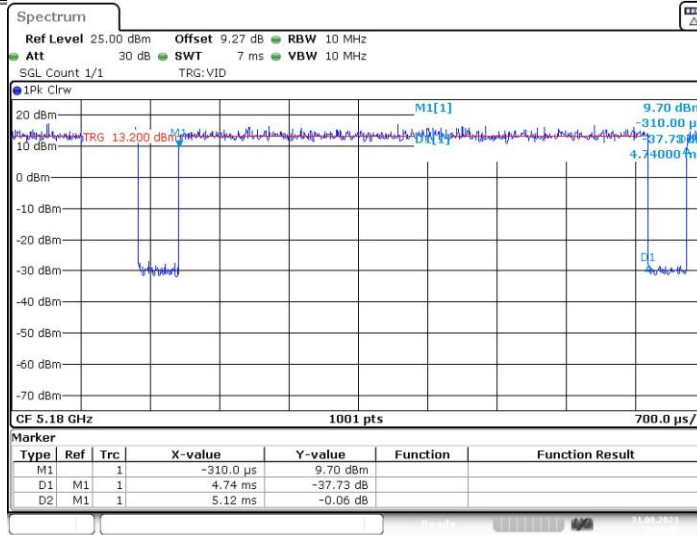


11AC20SISO_Ant1_5200

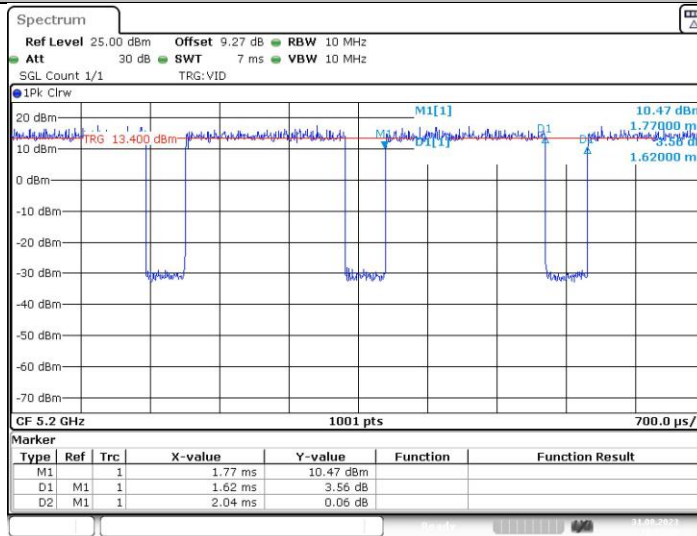


11AC20SISO_Ant1_5240

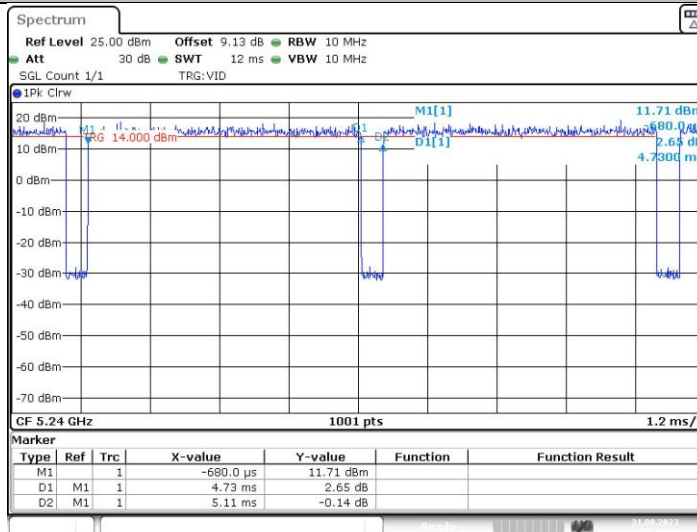


11AC20SISO_Ant1_5260

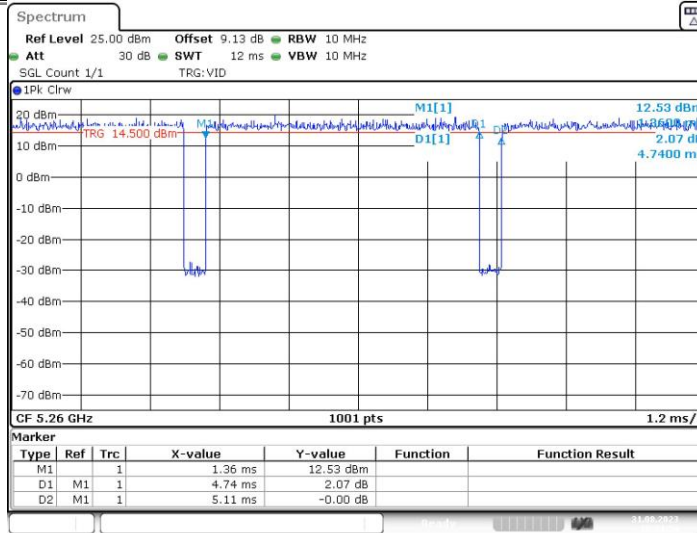


11AC20SISO_Ant1_5280

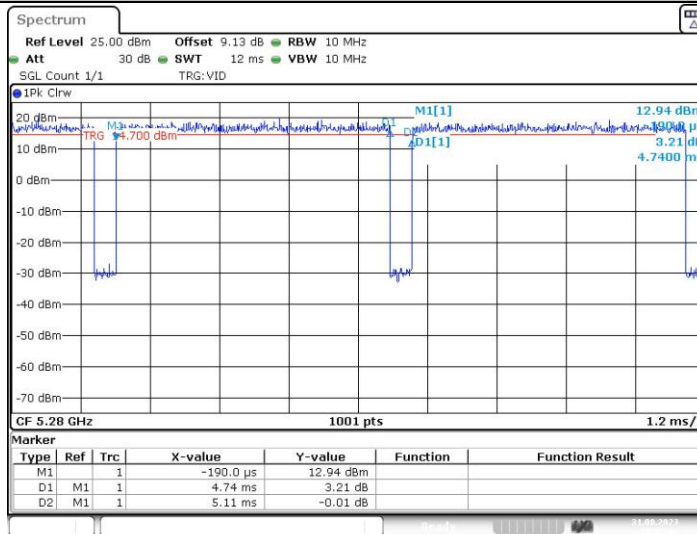


11AC20SISO_Ant1_5320

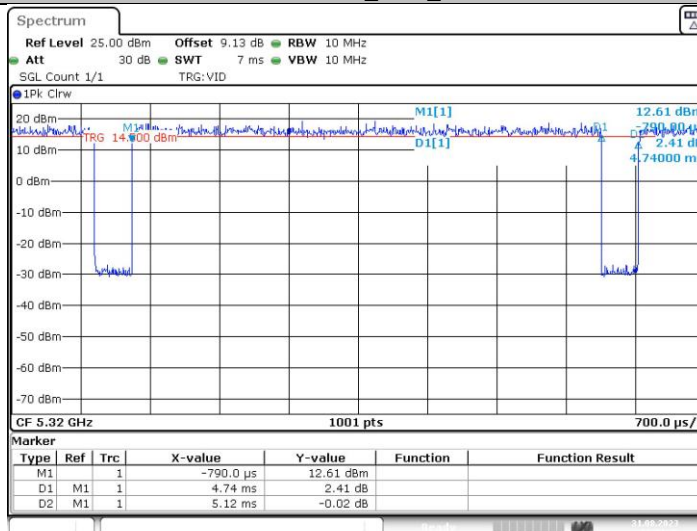


11AC20SISO_Ant1_5745

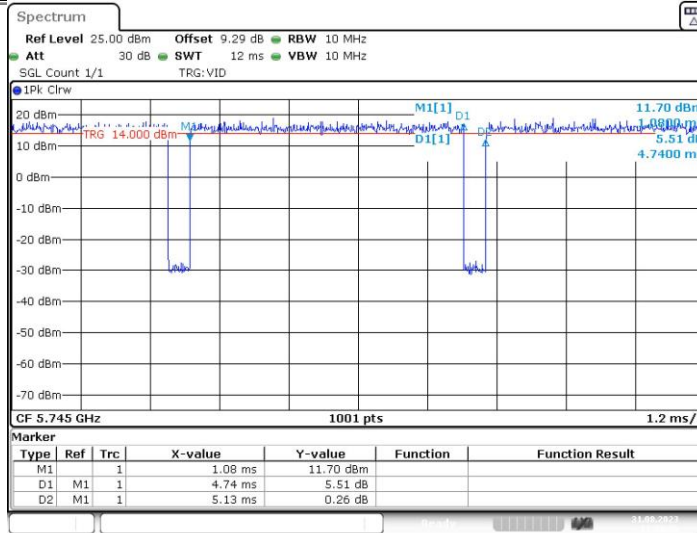


11AC20SISO_Ant1_5785

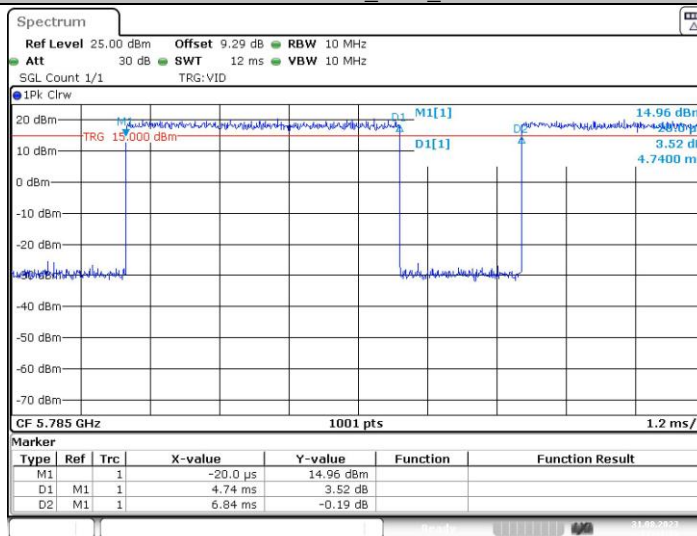


11AC20SISO_Ant1_5825

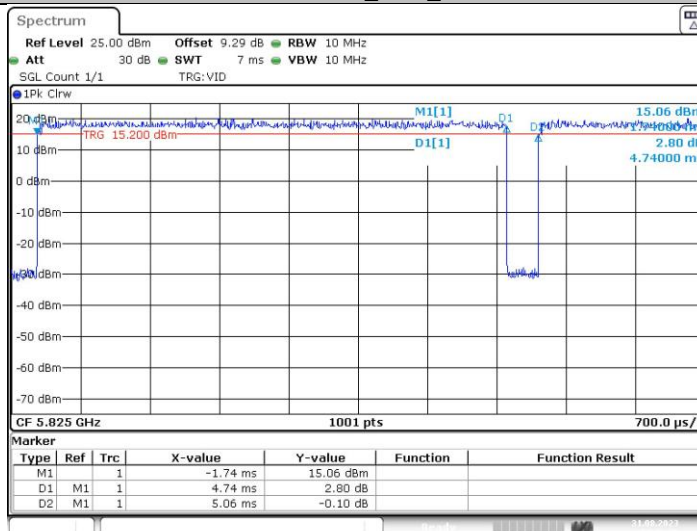


11AC40SISO_Ant1_5190

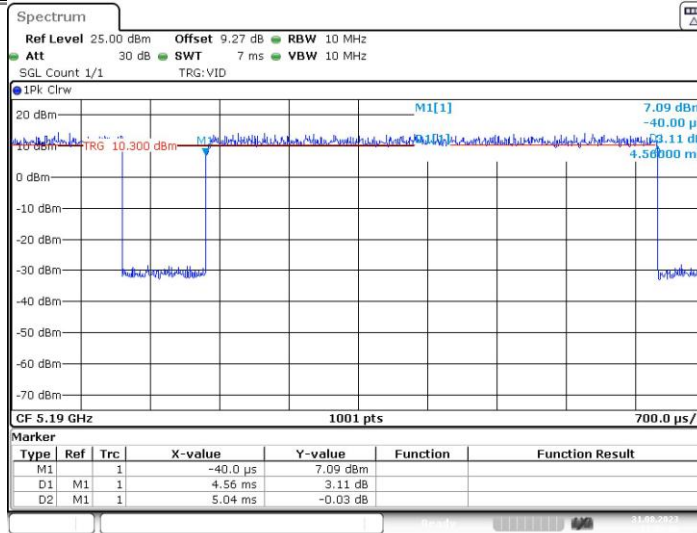


11AC40SISO_Ant1_5230

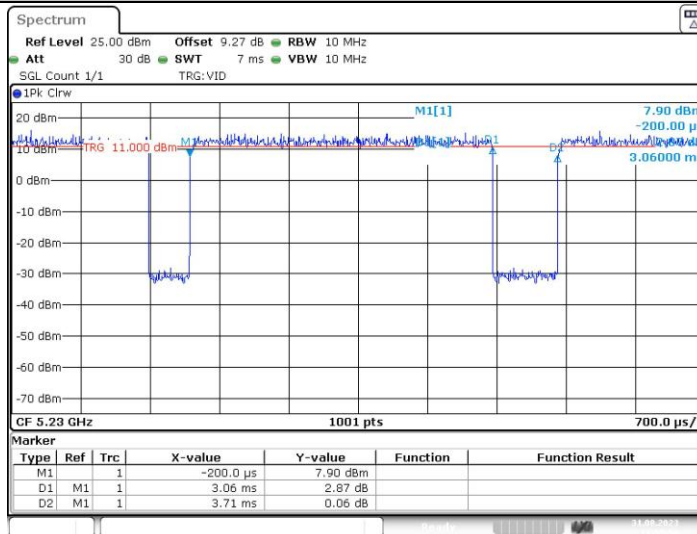


11AC40SISO_Ant1_5270

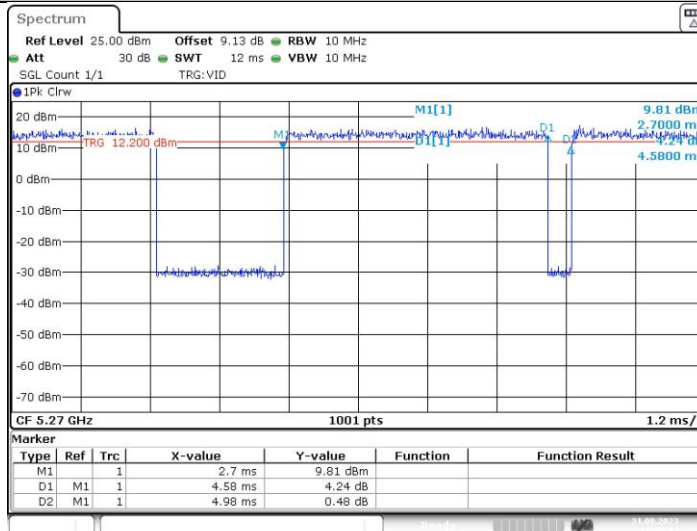


11AC40SISO_Ant1_5310

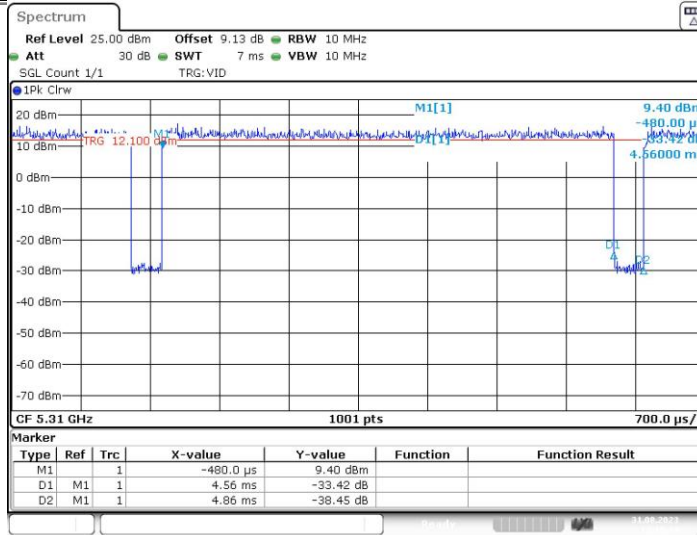


11AC40SISO_Ant1_5755

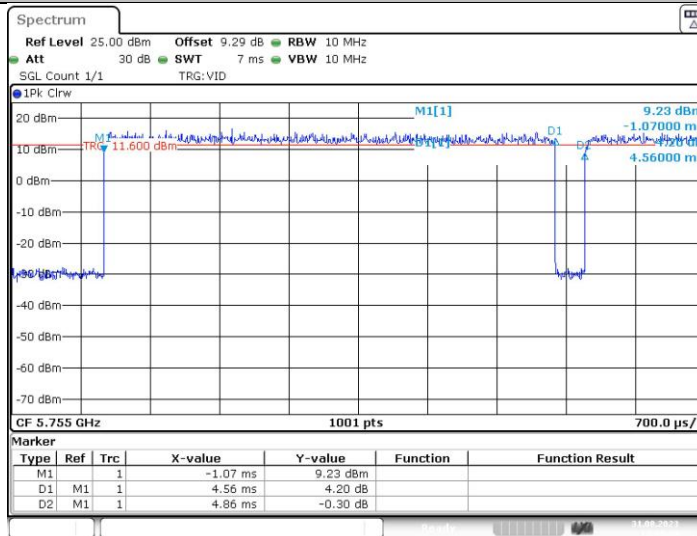


11AC40SISO_Ant1_5795

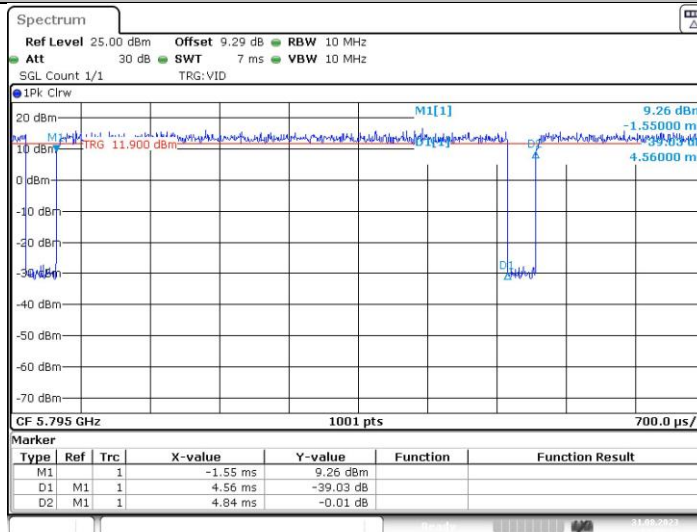


11AC80SISO_Ant1_5210

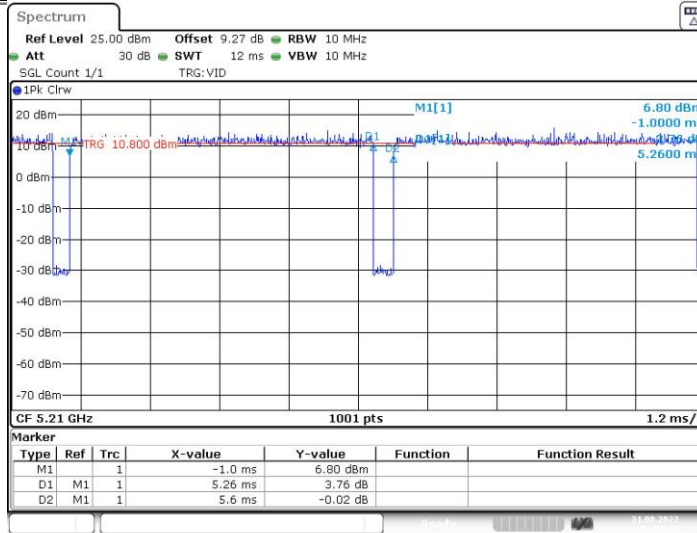

11AC80SISO_Ant1_5290

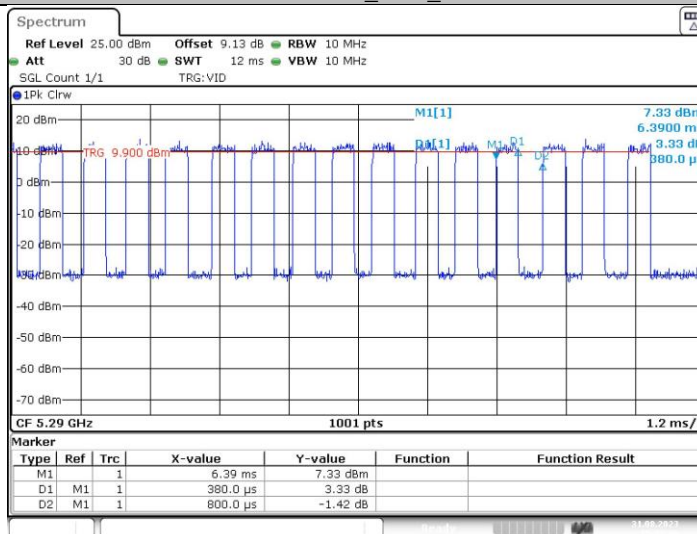

11AC80SISO_Ant1_5775

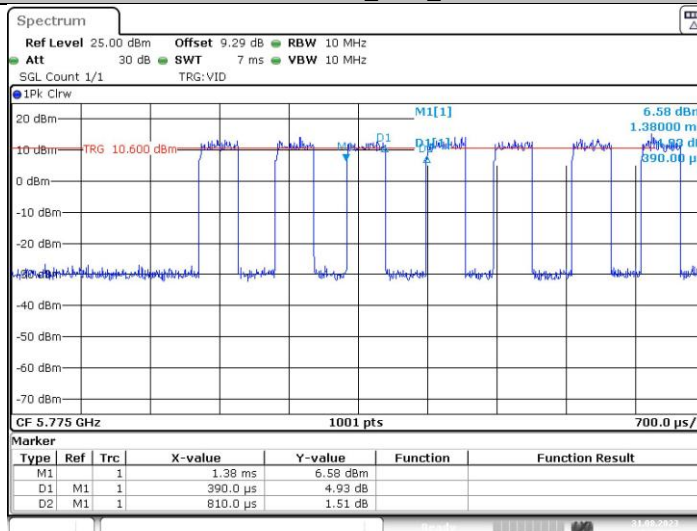

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%).

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%).

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%).


For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

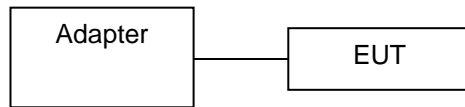

2.6 SUPPORT UNITS

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	/	/	/	/