



SAR Test Report

For

Applicant Name: Shenzhen DOOGEE Hengtong Technology CO., LTD
B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park,
Address: No. 22, Dafu Industrial Zone, Guanlan Aobei Community,
Guanlan Street, Longhua New District, Shenzhen, Guangdong
China
EUT Name: Smart Phone
Model Number: S200
Series Model Number: S200 S, S200 SE, S200 E, S200 X, S200 Plus, S200 Ultra, S200
Max, S200 XS, S200 X Pro, S200 X Plus, S200 X Max, S200
Mini, S200 Note, S200 Air, S200 Lite

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park,
Address: Tantou Community, Songgang Street, Bao'an District, Shenzhen,
China
FCC ID: 2AX4YS200
Report Number: BTF240711R00201
FCC 47 CFR§2.1093 IEEE1528-2013 IEEE C95.1-2019
Test Standards: KDB447498 D01 KDB865664 D01 KDB865664 D02
KDB941225 D01 KDB941225 D05 KDB248227 D01
KDB941225 D06 KDB648474 D04 KDB690783 D01
Test Conclusion: Pass
Test Date: 2023-07-16 to 2023-08-06
Date of Issue: 2024-08-07

Prepared By: Zoey Zhang
Zoey Zhang / Project Engineer
Date: 2024-08-07

Approved By: Ryan.CJ
Ryan.CJ / EMC Manager
Date: 2024-08-07



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2024-08-07	Original
<i>Note:</i>	<i>Once the revision has been made, then previous versions reports are invalid.</i>	

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Equipment under Test Ancillary Equipment	5
2.6 Technical Information	5
3. Summary of Test Results	7
3.1 Test Standards	7
3.2 Device Category and SAR Limit	7
3.3 Test Result Summary	8
3.4 Test Uncertainty	9
4. Measurement System	11
4.1 Specific Absorption Rate (SAR) Definition	11
4.2 MVG SAR System	11
5. System Verification	16
5.1 Purpose of System Check	16
5.2 System Check Setup	16
6. TEST POSITION CONFIGURATIONS	17
6.1 Head Exposure Conditions	17
6.2 Body-worn Position Conditions	22
6.3 Hotspot Mode Exposure Position Conditions	23
6.4 Product Specific 10g Exposure Consideration	23
7. Measurement Procedure	24
7.1 Measurement Process Diagram	24
7.2 SAR Scan General Requirement	25
7.3 Measurement Procedure	26
7.4 Area & Zoom Scan Procedure	26
8. Conducted RF Output Power	27
8.1 GSM	27
8.2 WCDMA	28
8.3 LTE	29
8.4 Wi-Fi	46
8.5 Bluetooth	52
8.6 NFC	52
9. Test Exclusion Consideration	53
9.1 SAR Test Exclusion Consideration Table	53
10. Test Result	54
11. SAR Measurement Variability	62
12. Simultaneous Transmission	63
12.1 Simultaneous Transmission Mode Considerations	63
12.2 Sum SAR of Simultaneous Transmission	63
13. Test Equipment List	64
ANNEX A Simulating Liquid Verification Result	65
ANNEX B System Check Result	65
ANNEX C SAR Dipole Calibrations	66
ANNEX C Test Data	87
ANNEX D SAR Test Setup Photos	175
ANNEX E EUT External and Internal Photos	177
ANNEX F Calibration Information	177

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at F101,201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1330

1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	Shenzhen DOOGEE Hengtong Technology CO., LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China

2.2 Manufacturer Information

Company Name:	Shenzhen DOOGEE Hengtong Technology CO., LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China

2.3 Factory Information

Company Name:	Shenzhen DOOGEE Hengtong Technology CO., LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China

2.4 General Description of Equipment under Test (EUT)

EUT Name:	Smart Phone
Under Test Model Name:	S200
Serial Model and Difference	S200 S, S200 SE, S200 E, S200 X, S200 Plus, S200 Ultra, S200 Max, S200 XS, S200 X Pro, S200 X Plus, S200 X Max, S200 Mini, S200 Note, S200 Air, S200 Lite
Description of Model name differentiation	Only the model name is different, others are the same.

2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Capacity	9000mAh
	Rated Voltage	3.87V

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/1900 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/7/19/25/26/66 TDD LTE Band 38/41 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80), 802.11ax(HE20/40/80) Bluetooth (EDR+BLE) NFC
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM, WCDMA, LTE, WLAN, Bluetooth		
Frequency Range	GSM 850	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	GSM 1900	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	WCDMA Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	LTE Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	LTE Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 7	TX: 2500 ~ 2570 MHz	RX: 2620 ~ 2690 MHz
	LTE band 19	Tx: 830 ~ 845 MHz	Rx: 875 ~ 890 MHz
	LTE Band 25	TX: 1850 ~ 1915 MHz	RX: 1930 ~ 1995 MHz
	LTE Band 26 part 90	TX: 814.7 ~ 823.3 MHz	RX: 859.7 ~ 868.3 MHz
	LTE Band 26 part 22	TX: 824.7 ~ 848.3 MHz	RX: 869.7 ~ 893.3 MHz
	LTE Band 66	TX: 1710 ~ 1780 MHz	RX: 2110 ~ 2200 MHz
	LTE Band 38	2570 ~ 2620 MHz	
	LTE Band 41	2535 ~ 2655 MHz	
	802.11b/g/n(HT20)	2412 ~ 2462 MHz	
	802.11n(HT40)	2422 ~ 2452 MHz	
	802.11a /802.11n(HT20/40) /802.11ac(VHT20/40/80)	5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5725 MHz 5725 ~ 5850 MHz	
	Bluetooth	2402 ~ 2480 MHz	
NFC	13.56 MHz		
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna BT: PIFA Antenna NFC: PIFA Antenna		
Hotspot Function	Support		
Power Reduction	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	<input type="checkbox"/> Production unit	<input checked="" type="checkbox"/> Identical prototype	

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
4	KDB447498 D04	Interim General RF Exposure Guidance v01
5	KDB865664 D01	SAR measurement 100MHz to 6GHz v01r04
6	KDB865664 D02	RF Exposure Reporting v01r02
7	KDB941225 D01	3G SAR Procedures v03r01
8	KDB941225 D05	SAR for LTE Devices v02r05
9	KDB248227 D01	802.11 Wi-Fi SAR v02r02
10	KDB941225 D06	Hotspot Mode v02r01
11	KDB648474 D04	Handset SAR v01r03
12	KDB690783 D01	SAR Listings on Grant v01r03

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as follows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Head 1-g SAR (0 mm Gap)	GSM 850	0.095	PCE	1.328
	GSM 1900	0.156		
	WCDMA Band II	0.160		
	WCDMA Band IV	0.174		
	WCDMA Band V	0.076		
	LTE Band 2	0.231		
	LTE Band 4	0.252		
	LTE Band 5	0.095		
	LTE Band 7	0.198		
	LTE Band 19	0.152		
	LTE Band 25	0.211		
	LTE Band 26 part 90	0.140		
	LTE Band 26 part 22	0.135		
	LTE Band 38	0.171		
	LTE Band 41	0.214		
	LTE Band 66	0.152		
	WLAN 2.4 GHz	0.582	DTS	
	WLAN 5.2 GHz	0.690	NII	
WLAN 5.4 GHz	0.515			
WLAN 5.6 GHz	0.522			
WLAN 5.8 GHz	1.328			
Bluetooth	0.079	DSS		
Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Hotspot(Body) 1-g SAR (10 mm Gap)	GSM 850	0.267	PCE	1.058
	GSM 1900	0.509		
	WCDMA Band II	0.654		
	WCDMA Band IV	0.539		
	WCDMA Band V	0.316		
	LTE Band 2	1.058		
	LTE Band 4	0.451		
	LTE Band 5	0.240		
	LTE Band 7	0.754		
	LTE Band 19	0.254		
	LTE Band 25	0.921		
	LTE Band 26 part 90	0.222		
	LTE Band 26 part 22	0.279		
	LTE Band 38	0.257		
	LTE Band 41	0.277		
	LTE Band 66	0.424		
	WLAN 2.4 GHz	0.240	DTS	
	WLAN 5.2 GHz	0.520	NII	
WLAN 5.4 GHz	0.526			
WLAN 5.6 GHz	0.505			
WLAN 5.8 GHz	0.528			
Bluetooth	0.075	DSS		

This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported Simultaneous SAR>

Exposure Position	Simultaneous Configuration	Highest Reported Simultaneous Transmission SAR (W/kg)	Limit (W/kg)	Verdict
Head 1-g SAR (0 mm Gap)	LTE Band 4 + 5G WIFI	1.580	1.6	Pass
Hotspot(Body) 1-g SAR (10 mm Gap)	LTE Band 2 + 5G WIFI	1.586	1.6	Pass

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test

Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	√0.5	√0.5	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	√3	√0.5	√0.5	2.41	2.41	∞
Boundary effect	1.0	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1.0	R	√3	1	1	0.58	0.58	∞
Modulation response	3.0	R	√3	1	1	1.73	1.73	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	1	1	0.00	0.00	∞
Integration Time	1.4	R	√3	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3.0	N	1	1	1	3.00	3.00	7
Output power Variation - SAR drift measurement	5.0	R	√3	1	1	2.89	2.89	∞
SAR scaling	2.0	R	√3	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4.0	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.47	10.34	
Expanded Uncertainty (95% Confidence interval)		k				20.95	20.69	

* This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4.2 Measurement uncertainty evaluation for system check

Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10 g)	1g Ui (+- %)	10 g Ui (+- %)	Vi veff
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	1	1	2.02	2.02	∞
Hemispherical Isotropy	5.9	R	√3	0	0	0.00	0.00	∞
Boundary effect	1	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1	R	√3	1	1	0.58	0.58	∞
Modulation response	0	N	√3	0	0	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	0	0	0.00	0.00	∞
Integration Time	1.4	R	√3	0	0	0.00	0.00	∞
RF ambient Conditions - Noise	3	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental source from numerical source	5	N	1	1	1	5.00	5.00	∞
Input Power and SAR drift measurement	0.5	R	√3	1	1	0.29	0.29	∞
Dipole Axis to Liquid Dist.	2.0	R	√3	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.16	10.03	
Expanded Uncertainty (95% Confidence interval)		k				20.32	20.06	

4. Measurement System

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
 ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 MVG SAR System

4.2.1 SAR system diagram

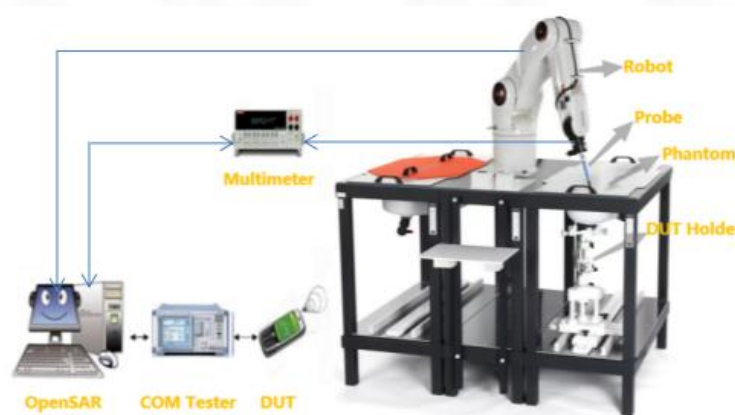

4.2.2 Robot



- A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System
- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
 - Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
 - Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for $f \geq 4\text{GHz}$.
- Probe linearity: $< 0.25\text{dB}$.
- Axial Isotropy: $< 0.25\text{dB}$.
- Spherical Isotropy: $< 0.50\text{dB}$.
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 20° .



4.2.4 Phantoms

SAM Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



SAM Phantom

The thickness of the phantom amounts to $2\text{ mm} \pm 0.2\text{ mm}$. The materials for the phantom do not affect the radiation of the device under test (DUT) : $\epsilon_r' < 5$
The head is filled with tissue simulating liquid. The hand do not have to be modeled.

TWIN SAM phantom

	Mechanical	Electrical	
Overall thickness	$2 \pm 0.2\text{ mm}$ (except ear area)	Relative permittivity	3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02
Maximum volume	27 L		
Material	Fiberglass based		

ELLIPTICAL Phantom

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




ELLI Phantom

The shape of the phantom is an ellipse with length $600\text{ mm} \pm 5\text{ mm}$ and width $400\text{ mm} \pm 5\text{ mm}$. The phantom shell is made of low-loss and low-permittivity material, having loss tangent $\tan \delta \leq 0.05$ and relative permittivity:
 $\epsilon_r' \leq 5$ for $f \leq 3\text{ GHz}$
 $3 \leq \epsilon_r' \leq 5$ for $f > 3\text{ GHz}$
 The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of $\pm 0.2\text{ mm}$.

Technical & mechanical characteristics

Shell thickness	$2\text{ mm} \pm 0.2\text{ mm}$
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

4.2.5 Device Holder

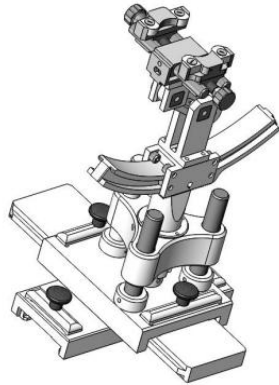

System Material	Permittivity	Loss tangent
Delrin	3.7	0.005


(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)

System Material	Permittivity	Loss tangent
PMMA	2.9	0.028


4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth

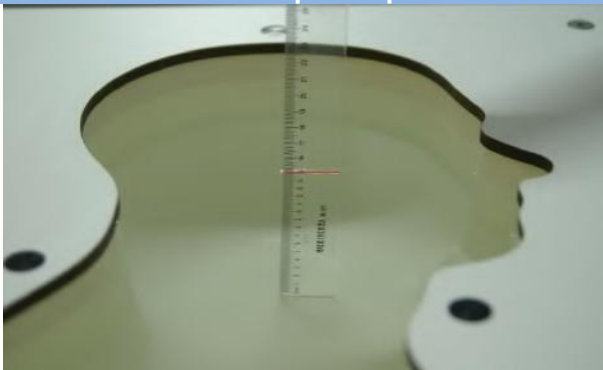

Body Liquid Depth

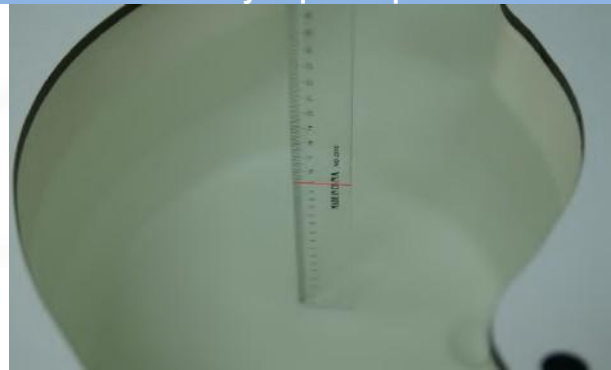

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

5. System Verification

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

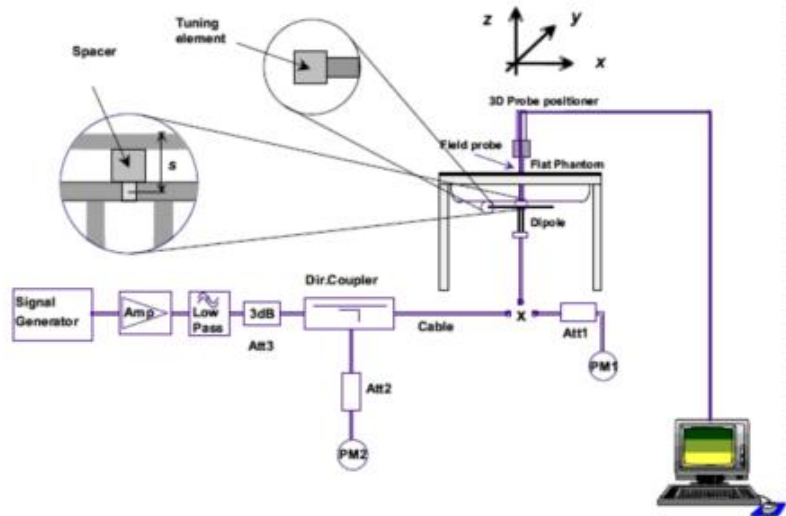

6. TEST POSITION CONFIGURATIONS

According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEC IEEE 62209-1528:2020 using the SAM phantom illustrated as below.

6.1.1 Definition of the cheek position

The cheek position is established using steps a) to j) as follows.

- (a) Configure the DUT for voice operation, if necessary. For example, for a DUT with a flip.a)swivel, or slide cover piece, open the cover if this is consistent with voice operation. If the DUT can also be used with the cover closed, both configurations shall be tested.
- (b) Define two imaginary lines on the DUT, the vertical centreline and the horizontal line, relative to the DUT in vertical orientation as shown in Figure 15.
- (c) The vertical centreline passes through two points on the front side of the DUT: the midpoint of the width w of the DUT at the level of the acoustic output (Point A in Figure 15), and the midpoint of the width w_t at the bottom of the DUT (Point B). The horizontal line is perpendicular to the vertical centerline, and passes through the centre of the acoustic output (Figure 15). The two lines intersect at Point A. Note that for many DUTs, Point A coincides with the centre of the acoustic output. However, the acoustic output could be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the DUT, especially for clamshell DUTs, DUTs with flip cover pieces, and other irregularly shaped DUTs.
- (d) Position the DUT close to the surface of the phantom such that Point A is on the (virtual) extension of the line passing through points RE (right-ear ear reference point) and LE left-ear ear reference point) on the phantom (see Figure 16a) and Figure 16b)). The plane determined by the vertical centreline and the horizontal line of the DUT shall be parallel to the sagittal plane of the phantom.
- (e) Translate the DUT towards the phantom along the line passing through RE and LE until the DUT touches the ear (see Figure 16c)).
- (f) Rotate the DUT around the (virtual) LE-RE Line until the DUT vertical centreline is in the)reference plane(see Figure 16d)).
- (g) Rotate the DUT around its vertical centreline until the plane established by the DUT vertical centreline and horizontal line is parallel to the N-F line (see Annex G), and then translate the DUT towards the phantom along the LE-RE line until DUT Point A touches the ear at the ERP (ear reference point) (see Figure 16e))
- (h) While keeping Point A on the line passing through RE and LE and maintaining the DUT in contact with the pinna, rotate the DUT about the N-F line until any point on the DUT is in contact with a phantom point below the pinna (cheek) (see Figure 16f)). The physical angles of rotation shall be documented.
- (i) While keeping DUT Point A in contact with the ERP rotate the DUT around a line perpendicular to the plane established by the DUT vertical centreline and horizontal line and passing through DUT Point A, until the DUT vertical centreline is in the reference plane(see Figure 16g)).

- (j) Verify that the cheek position is correct as follows:
- 1) the N-F line is in the plane established by the DUT vertical centreline and horizontal line;
 - 2) DUT Point A touches the pinna at the ERP
 - 3) the DUT vertical centreline is in the reference plane.



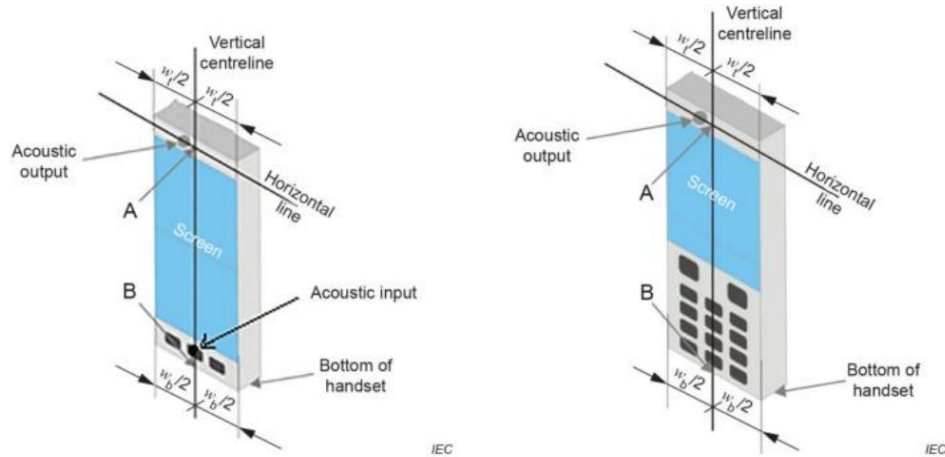


Figure 15 - Vertical and horizontal reference lines and reference points A and B on two example device types: a full touch-screen smart phone (left) and a DUT with a keypad (right)

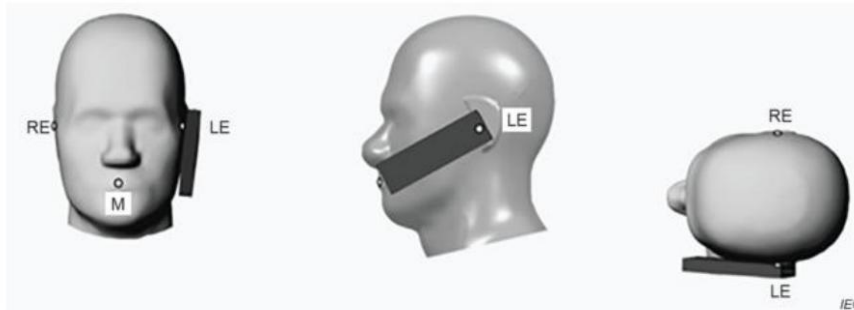


NOTE The reference points for the right-ear ear reference point (RE), left-ear ear reference point (LE), and mouth (M), which establish the reference plane for DUT positioning, are indicated. This device position shall be maintained for the sagittal phantom test set-up shown in Figure G.4.

a) Phone position 1 – cheek position

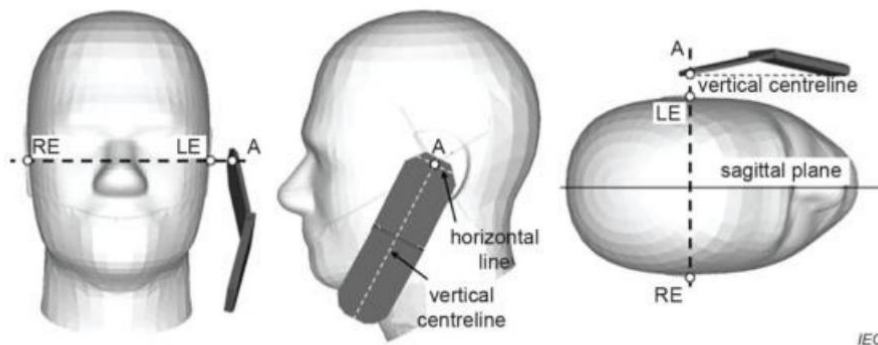


b) One possible DUT position against the head after applying 7.2.4.2.2 c)

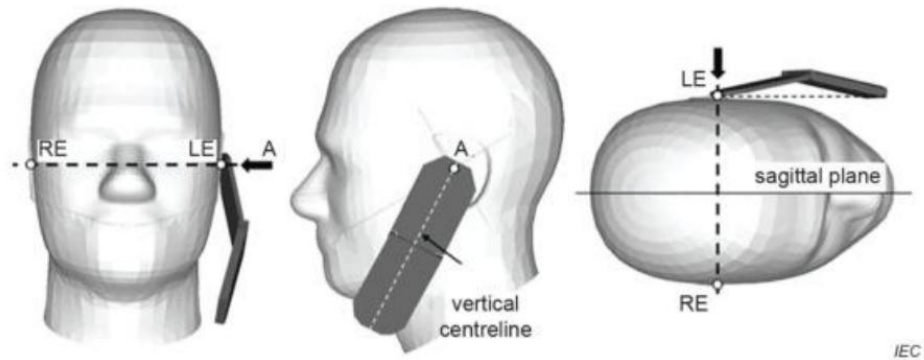

IEC

NOTE The black arrows show the direction of translation of the DUT for 7.2.4.2.2 d).


c) DUT position after applying 7.2.4.2.2 d)

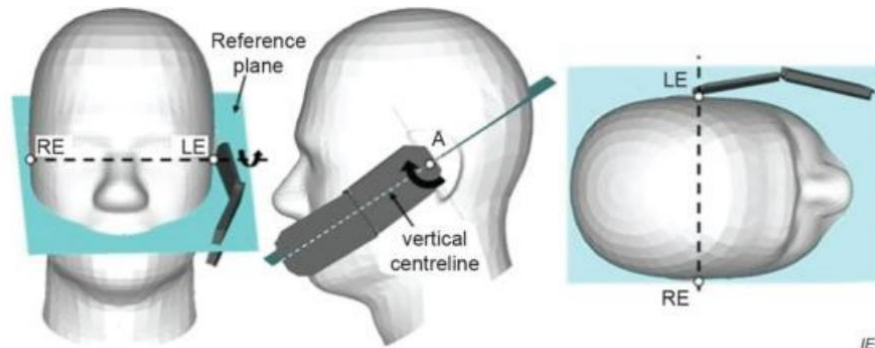

IEC

NOTE The curved black arrows show the direction of rotation of the DUT for 7.2.4.2.2 e).


d) DUT position after applying 7.2.4.2.2 e)

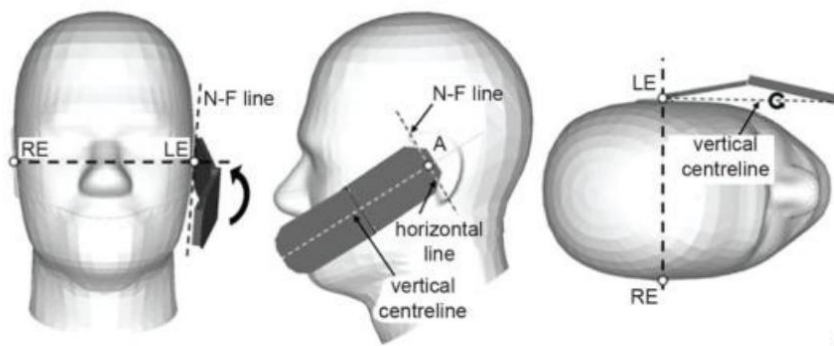

IEC


NOTE The curved black arrows show the direction of rotation of the DUT for 7.2.4.2.2 f).

e) DUT position after applying 7.2.4.2.2 f)

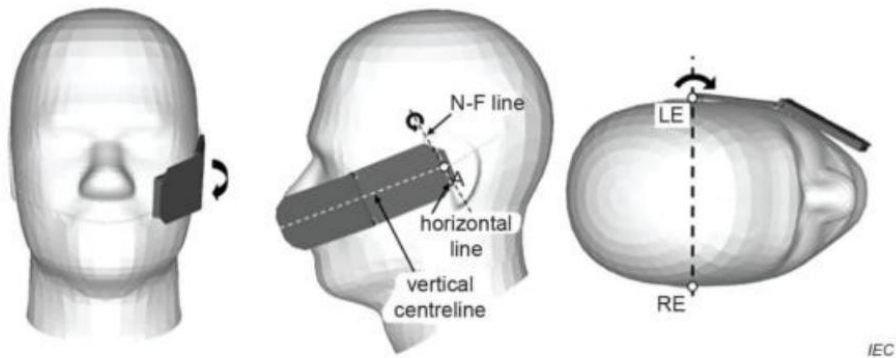

NOTE The curved black arrows show the direction of rotation of the DUT for 7.2.4.2.2 g)

f) DUT position after applying 7.2.4.2.2 g)

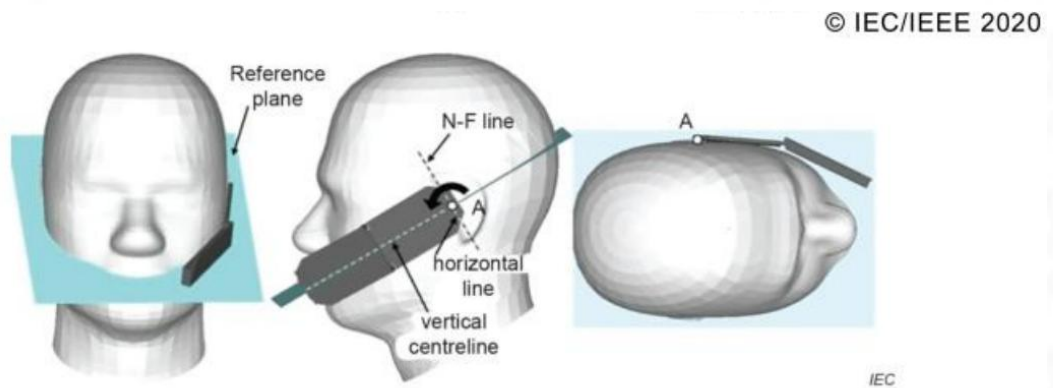

NOTE The curved black arrows show the direction of rotation of the DUT for 7.2.4.2.2 h).


g) DUT position after applying 7.2.4.2.2 h)

Figure 16 – Cheek position of the DUT on the left side of SAM where the device position shall be maintained for the phantom test set-up

6.1.2 Definition of the tilt position

The tilt position is established using steps a) through d) as follows.

- (a) Repeat steps a) through j) of 7.2.4.2.2 to place the DUT in the cheek position)(see Figure16).
- (b) While maintaining the orientation of the DUT, move the DUT away from the pinna along the line passing through RE and LE far enough to allow a rotation of the DUT away from the cheek by 15°.
- (c) Rotate the DUT around the horizontal line by 15°(see Figure 17).
- (d) While maintaining the orientation of the DUT. move the DUT towards the phantom on a line passing through RE and LE until any part of the DUT touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g. an extended antenna in contact with the back of the head phantom, the angle of the DUT shall be reduced. in this case, the tilt position is obtained if any part of the DUT is in contact with the pinna and a second point on the DUT is in contact with the phantom,e.g.the antenna in contact with the back of the head.

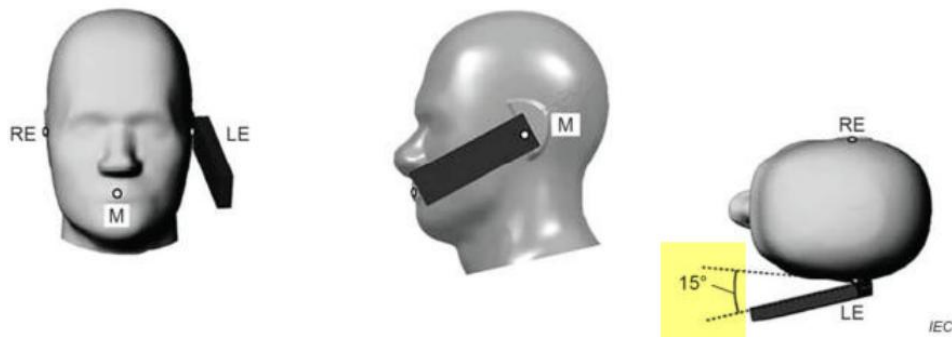

Key

- M Mouth reference point
- LE Left-ear ear reference point
- RE Right-ear ear reference point

This device position shall be maintained for the phantom test set-up.


Figure 17 – Tilt position of the DUT on the left side of SAM

6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

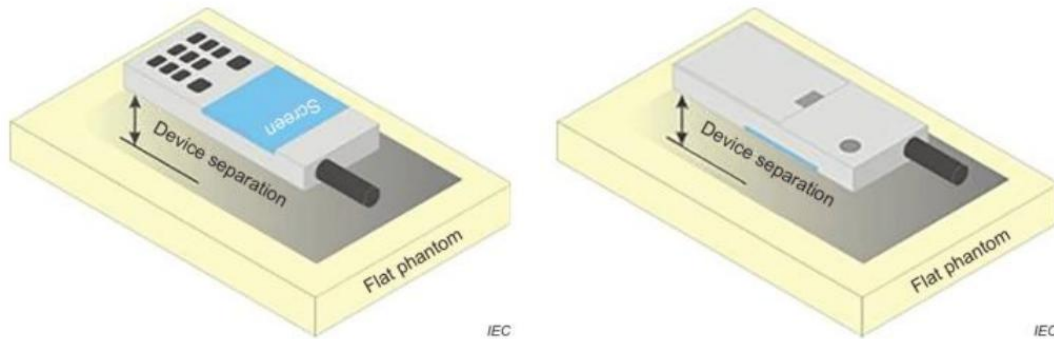

6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

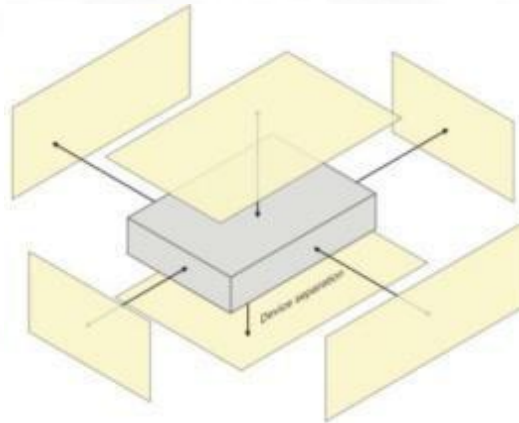

6.4 Product Specific 10g Exposure Consideration


According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

7. Measurement Procedure

7.1 Measurement Process Diagram

Body SAR

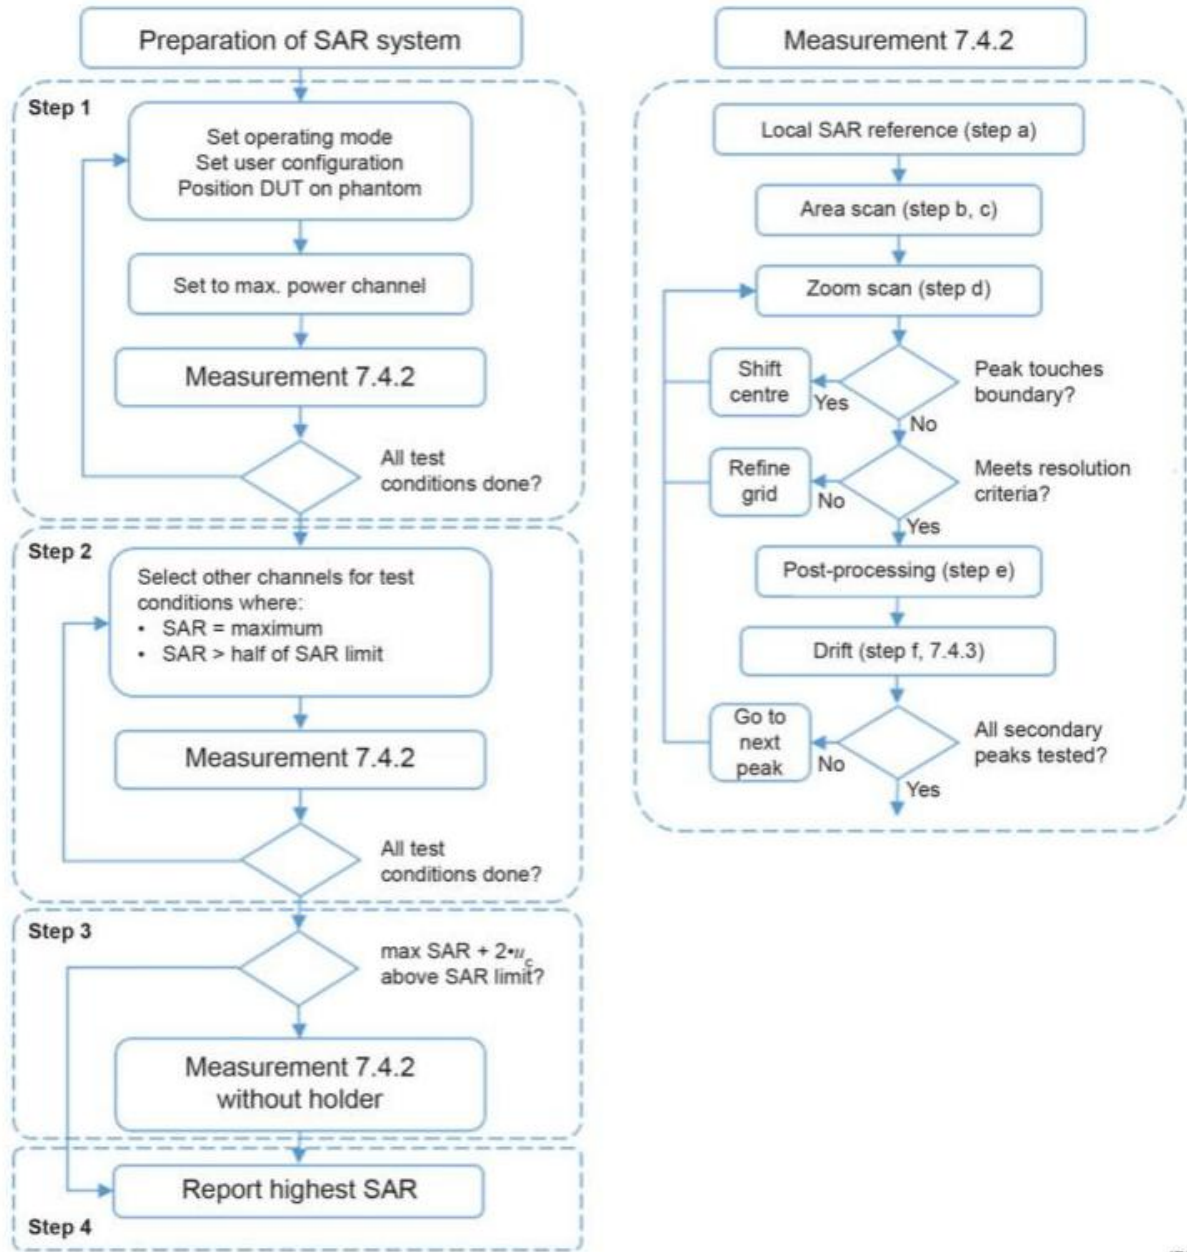

IEC

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEC/IEEE 62209-1528: 2020.

Table 3 – Area scan parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	3 GHz < $f \leq 10$ GHz
Maximum distance between the measured points (geometric centre of the sensors) and the inner phantom surface (z_{M1} in Figure 20 in mm)	5 ± 1	$\delta \ln(2)/2 \pm 0,5^a$
Maximum spacing between adjacent measured points in mm (see O.8.3.1) ^b	20, or half of the corresponding zoom scan length, whichever is smaller	60/f, or half of the corresponding zoom scan length, whichever is smaller
Maximum angle between the probe axis and the phantom surface normal (α in Figure 20) ^c	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Tolerance in the probe angle	1°	1°

^a δ is the penetration depth for a plane-wave incident normally on a planar half-space.
^b See Clause O.8 on how Δx and Δy may be selected for individual area scan requirements.
^c The probe angle relative to the phantom surface normal is restricted due to the degradation in the measurement accuracy in fields with steep spatial gradients. The measurement accuracy decreases with increasing probe angle and increasing frequency. This is the reason for the tighter probe angle restriction at frequencies above 3 GHz.

Table 4 – Zoom scan parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	3 GHz < $f \leq 10$ GHz
Maximum distance between the closest measured points and the phantom surface (z_{M1} in Figure 20 and Table 3, in mm)	5	$\delta \ln(2)/2^a$
Maximum angle between the probe axis and the phantom surface normal (α in Figure 20)	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Maximum spacing between measured points in the x- and y-directions (Δx and Δy , in mm)	8	24/f ^b
For uniform grids: Maximum spacing between measured points in the direction normal to the phantom shell (Δz_1 in Figure 20, in mm)	5	10/(f - 1)
For graded grids: Maximum spacing between the two closest measured points in the direction normal to the phantom shell (Δz_1 in Figure 20, in mm)	4	12/f
For graded grids: Maximum incremental increase in the spacing between measured points in the direction normal to the phantom shell ($R_z = \Delta z_2/\Delta z_1$ in Figure 20)	1,5	1,5
Minimum edge length of the zoom scan volume in the x- and y-directions (L_z in O.8.3.2, in mm)	30	22
Minimum edge length of the zoom scan volume in the direction normal to the phantom shell (L_n in O.8.3.2 in mm)	30	22
Tolerance in the probe angle	1°	1°

^a δ is the penetration depth for a plane-wave incident normally on a planar half-space.
^b This is the maximum spacing allowed, which might not work for all circumstances.

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8. Conducted RF Output Power

8.1 GSM

Mode: GSM850		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH128	CH190	CH251		CH128	CH190	CH251
			824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM		32.50	32.01	32.31	32.42	-9.03	22.98	23.28	23.39
GPRS (GMSK)	1Tx slot	32.50	32.07	32.29	32.39	-9.03	23.04	23.26	23.36
	2Tx slots	30.50	30.08	30.00	29.92	-6.02	24.06	23.98	23.90
	3Tx slots	28.00	27.82	27.71	27.70	-4.26	23.56	23.45	23.44
	4Tx slots	26.00	25.70	25.57	25.49	-3.01	22.69	22.56	22.48
EGPRS (8PSK)	1Tx slot	26.00	25.94	25.72	25.68	-9.03	16.91	16.69	16.65
	2Tx slots	24.50	24.36	24.34	24.35	-6.02	18.34	18.32	18.33
	3Tx slots	22.00	21.81	21.87	21.82	-4.26	17.55	17.61	17.56
	4Tx slots	19.50	19.06	19.06	19.21	-3.01	16.05	16.05	16.20
Mode: GSM1900		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH512	CH661	CH810		CH512	CH661	CH810
			1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM		29.00	28.53	28.41	27.82	-9.03	19.50	19.38	18.79
GPRS (GMSK)	1Tx slot	29.00	28.55	28.34	27.75	-9.03	19.52	19.31	18.72
	2Tx slots	26.50	26.38	25.81	24.78	-6.02	20.36	19.79	18.76
	3Tx slots	25.00	24.83	24.26	23.27	-4.26	20.57	20.00	19.01
	4Tx slots	23.00	22.59	21.97	21.00	-3.01	19.58	18.96	17.99
EGPRS (8PSK)	1Tx slot	26.50	26.22	26.12	25.49	-9.03	17.19	17.09	16.46
	2Tx slots	25.00	24.46	24.52	23.93	-6.02	18.44	18.50	17.91
	3Tx slots	22.50	22.30	22.34	21.76	-4.26	18.04	18.08	17.50
	4Tx slots	20.50	20.22	20.26	19.72	-3.01	17.21	17.25	16.71
Note: 1) Division Factors To average the power, the division factor is as follows: 1Tx-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB 2Tx-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB 3Tx-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB 4Tx-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB									

8.2 WCDMA

Mode		Maximum Tune-up(dBm)	WCDMA Band II		
			Conducted Power (dBm)		
			CH9262	CH9400	CH9538
RMC 12.2K		22.00	21.60	21.39	21.33
HSDPA	Subtest-1	22.00	21.63	21.78	21.32
	Subtest-2	22.00	21.33	21.52	21.04
	Subtest-3	21.50	21.12	21.33	20.86
	Subtest-4	21.50	21.15	21.37	20.93
HSUPA	Subtest-1	20.00	18.94	19.51	18.90
	Subtest-2	20.00	19.56	19.86	19.56
	Subtest-3	20.50	20.03	19.80	19.52
	Subtest-4	20.50	20.08	20.10	19.78
	Subtest-5	22.00	21.68	21.89	21.43
Mode		Maximum Tune-up(dBm)	WCDMA Band IV		
			Conducted Power (dBm)		
			CH1312	CH1413	CH1513
RMC 12.2K		22.00	21.35	21.58	21.21
HSDPA	Subtest-1	22.50	21.49	22.46	21.37
	Subtest-2	22.50	21.54	22.48	21.44
	Subtest-3	22.50	21.54	22.45	21.45
	Subtest-4	22.50	21.52	22.42	21.45
HSUPA	Subtest-1	22.00	20.93	21.77	20.85
	Subtest-2	22.50	21.20	22.04	21.18
	Subtest-3	22.50	21.64	22.08	21.09
	Subtest-4	22.50	21.71	22.30	21.43
	Subtest-5	23.00	21.60	22.51	21.48
Mode		Maximum Tune-up(dBm)	WCDMA Band V		
			Conducted Power (dBm)		
			CH4132	CH4183	CH4233
RMC 12.2K		17.00	16.74	16.66	16.60
HSDPA	Subtest-1	15.50	15.22	15.11	14.84
	Subtest-2	15.00	14.72	14.62	14.34
	Subtest-3	15.00	14.75	14.65	14.36
	Subtest-4	15.00	14.71	14.60	14.30
HSUPA	Subtest-1	20.50	20.09	20.07	19.73
	Subtest-2	20.50	20.21	20.23	19.90
	Subtest-3	20.50	20.23	20.25	19.92
	Subtest-4	20.00	19.76	19.78	19.42
	Subtest-5	21.50	21.19	21.22	20.85

Per KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

8.3 LTE

Band 2

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		18607	18900	19193	
					1850.7MHz	1880.0MHz	1909.3MHz	
1.4MHz	QPSK	1	0	23.00	23.00	22.81	22.66	
			2	23.50	23.02	22.88	22.74	
			5	23.00	22.99	22.87	22.70	
		3	0	23.50	23.08	23.01	22.83	
			2	23.50	23.07	22.91	22.86	
			3	23.50	23.13	22.99	22.78	
	16QAM	6	0	22.50	22.10	21.94	21.76	
			1	0	23.00	22.71	22.68	22.39
				2	23.00	22.70	22.70	22.37
		5		23.50	23.12	22.85	22.84	
		3	0	22.00	21.76	21.64	21.30	
			2	22.00	21.89	21.60	21.30	
3	22.00		21.90	21.72	21.42			
6	0	21.50	21.17	21.25	20.87			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18615	18900	19185	
					1851.5MHz	1880.0MHz	1908.5MHz	
3MHz	QPSK	1	0	23.50	23.05	22.80	22.87	
			7	23.50	23.02	22.91	22.75	
			14	23.50	23.04	22.84	22.77	
		8	0	22.50	22.09	21.95	21.85	
			4	22.50	22.10	21.84	21.90	
			7	22.50	22.05	21.92	21.73	
	15	0	22.50	22.03	21.93	21.73		
	16QAM	1	0	22.00	21.98	21.78	21.93	
			7	22.00	21.91	21.74	21.86	
			14	22.00	21.92	21.76	21.9	
		8	0	21.50	21.32	21.11	21.19	
			4	21.50	21.33	21.13	20.96	
7			21.50	21.32	21.06	21.1		
15	0	21.50	21.05	20.97	20.88			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18625	18900	19175	
					1852.5MHz	1880.0MHz	1907.5MHz	
5MHz	QPSK	1	0	23.50	23.18	22.85	22.85	
			13	23.50	23.17	22.90	22.95	
			24	23.50	23.18	23.09	22.82	
		12	0	22.50	22.21	21.86	21.79	
			6	22.50	22.21	21.87	21.84	
			13	22.50	22.11	21.90	21.79	
	25	0	22.50	22.07	21.82	21.88		
	16QAM	1	0	22.00	21.90	21.28	21.17	
			13	22.00	21.85	21.27	21.15	
			24	22.00	21.92	21.34	21.16	
		12	0	21.50	21.16	20.97	20.86	
			6	21.50	21.27	20.87	20.87	
13			21.50	21.23	20.87	20.80		
25	0	21.50	21.25	20.97	21.07			

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)					
Bandwidth	Modulation	RB allocation	RB offset		18650	18900	19150			
					1855.0MHz	1880.0MHz	1905.0MHz			
10MHz	QPSK	1	0	23.50	23.04	22.82	22.92			
			25	23.50	23.16	22.86	22.76			
			49	23.50	23.04	22.91	22.66			
		25	0	22.50	22.20	21.90	21.91			
			13	22.50	22.13	21.93	21.75			
			25	22.50	22.08	21.94	21.74			
	50	0	22.50	22.16	21.75	21.86				
		16QAM	1	0	22.00	21.89	21.98	21.95		
				25	22.00	21.98	21.56	21.82		
	49			22.00	21.40	21.74	21.73			
	25	16QAM	25	0	21.50	21.24	20.81	20.82		
				13	21.50	21.23	20.82	20.84		
				25	21.50	21.25	20.95	20.82		
	50	16QAM	50	0	21.50	21.16	20.85	20.87		
				Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18675	18900
1857.5MHz									1880.0MHz	1902.5MHz
15MHz	QPSK	1	0	23.50	23.15	22.77	23.00			
			38	23.50	23.22	22.86	22.82			
			74	23.50	22.50	23.05	22.68			
		36	0	22.50	21.89	21.90	22.09			
			18	22.00	21.99	21.52	21.89			
			39	22.50	21.65	22.10	21.42			
	75	0	22.50	22.05	21.93	21.93				
		16QAM	1	0	22.50	22.05	21.98	21.80		
				38	22.50	22.09	22.02	21.92		
	74			22.50	21.63	22.09	21.86			
	36	16QAM	36	0	22.50	21.88	21.42	22.11		
				18	22.00	21.97	21.88	21.56		
				39	22.50	21.67	22.09	21.75		
	75	16QAM	75	0	21.50	21.19	20.87	20.95		
				Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18700	18900
1860.0MHz									1880.0MHz	1900.0MHz
20MHz	QPSK	1	0	23.50	22.98	22.84	23.35			
			50	23.50	23.07	22.75	23.07			
			99	23.50	22.82	23.07	22.85			
		50	0	22.50	22.05	21.80	22.14			
			25	22.50	22.14	21.83	22.04			
			50	22.00	21.90	21.93	21.82			
	100	0	22.50	22.03	21.88	21.84				
		16QAM	1	0	23.00	22.50	22.00	21.99		
				50	23.00	22.54	21.95	21.78		
	99			22.50	22.27	22.25	21.59			
	50	16QAM	50	0	21.50	21.16	21.01	21.15		
				25	21.50	21.14	21.03	21.17		
				50	21.50	20.97	21.16	21.00		
	100	16QAM	100	0	21.50	21.08	20.93	20.94		

Band 4

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		19957	20175	20393
					1710.7MHz	1732.5MHz	1754.3MHz
1.4MHz	QPSK	1	0	23.00	22.73	22.84	22.58
			2	23.00	22.74	22.81	22.55
			5	23.00	22.74	22.88	22.61
		3	0	23.00	22.81	22.88	22.65
			2	23.00	22.78	22.88	22.68
			3	23.00	22.80	22.95	22.51
	6	0	22.00	21.74	21.98	21.56	
	16QAM	1	0	23.00	21.56	22.05	22.50
			2	23.50	21.52	22.07	23.01
			5	22.50	21.51	22.02	22.38
		3	0	22.00	21.54	21.73	21.05
			2	22.00	21.78	21.72	21.05
			3	22.00	21.76	21.89	21.05
	6	0	21.50	20.69	21.09	20.80	
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19965	20175	20385
					1711.5MHz	1732.5MHz	1753.5MHz
3MHz	QPSK	1	0	23.50	22.66	23.03	22.45
			7	23.50	22.76	23.02	22.58
			14	23.00	22.64	22.99	22.51
		8	0	22.00	21.75	21.97	21.54
			4	22.00	21.76	21.79	21.56
			7	22.00	21.61	21.93	21.53
	15	0	22.00	21.66	21.88	21.65	
	16QAM	1	0	22.00	21.06	21.72	21.64
			7	22.50	21.06	22.44	21.59
			14	23.00	21.12	22.51	21.57
		8	0	21.50	21.01	20.96	20.92
			4	21.50	21.02	21.02	20.79
			7	21.00	20.92	20.90	20.87
	15	0	21.00	20.71	20.94	20.75	
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19976	20175	20375
					1712.5MHz	1732.5MHz	1752.5MHz
5MHz	QPSK	1	0	23.00	22.80	22.84	22.46
			13	23.00	22.70	22.88	22.53
			24	23.00	22.77	22.80	22.76
		12	0	22.50	21.74	22.02	21.62
			6	22.00	21.77	21.84	21.51
			13	22.00	21.72	21.88	21.45
	25	0	22.00	21.60	21.92	21.61	
	16QAM	1	0	22.00	21.96	21.66	21.04
			13	22.00	21.84	21.58	20.75
			24	22.00	21.98	21.54	20.79
		12	0	21.50	20.85	21.07	20.5
			6	21.50	20.94	21.07	20.49
			13	21.00	20.73	20.94	20.55
	25	0	21.00	20.52	20.98	20.76	

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20000	20175	20350
					1715.0MHz	1732.5MHz	1750.0MHz
10MHz	QPSK	1	0	23.50	22.72	23.02	22.46
			25	23.00	22.67	22.98	22.45
			49	23.00	22.75	22.78	22.52
		25	0	22.00	21.73	21.96	21.44
			13	22.00	21.62	21.96	21.48
			25	22.00	21.68	21.76	21.53
	16QAM	1	0	22.00	21.63	21.79	21.47
			0	23.00	21.14	22.55	21.58
			25	22.50	21.16	22.42	21.21
		25	49	22.00	21.07	21.60	21.24
			0	21.50	20.79	21.07	20.57
			13	21.50	20.79	21.08	20.47
		50	25	21.00	20.91	20.89	20.55
			0	21.00	20.83	20.89	20.61
			0	21.00	20.83	20.89	20.61
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20025	20175	20325
					1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	23.00	22.82	22.94	22.64
			38	23.50	22.87	23.07	22.49
			74	23.00	22.96	22.73	22.43
		36	0	23.00	21.69	22.57	21.70
			18	22.50	21.61	22.49	21.14
			39	22.00	21.86	21.58	21.54
	16QAM	75	0	22.00	21.81	21.89	21.50
			0	23.00	21.77	22.60	21.65
			38	22.00	21.80	21.79	21.57
		36	74	22.50	21.89	22.22	21.63
			0	23.00	21.55	22.52	21.35
			18	22.50	21.68	22.44	21.24
		75	39	22.00	21.79	21.60	21.64
			0	21.00	20.91	20.89	20.56
			0	21.00	20.91	20.89	20.56
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20050	20175	20300
					1720.0MHz	1732.5MHz	1745.0MHz
20MHz	QPSK	1	0	23.50	22.84	22.90	23.04
			50	23.00	22.88	22.87	22.65
			99	23.00	22.85	22.62	22.77
		50	0	22.00	21.83	21.96	21.66
			25	22.50	21.84	22.00	21.67
			50	22.00	21.93	21.78	21.46
	16QAM	100	0	22.00	21.77	21.79	21.58
			0	22.50	22.43	21.60	21.41
			50	22.50	22.30	21.56	20.94
		50	99	22.50	22.47	21.32	21.05
			0	21.50	20.79	21.11	20.85
			25	21.50	20.84	21.18	20.88
		100	50	21.00	21.00	20.84	20.66
			0	21.00	20.94	20.89	20.74
			0	21.00	20.94	20.89	20.74

Band 5

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
1.4MHz	QPSK	1	0	25.00	24.64	24.61	24.47
			2	25.00	24.61	24.60	24.56
			5	25.00	24.54	24.58	24.50
		3	0	25.00	24.74	24.68	24.68
			2	25.00	24.64	24.68	24.66
			3	25.00	24.63	24.71	24.64
	6	0	24.00	23.75	23.77	23.69	
	16QAM	1	0	25.00	24.43	24.51	23.77
			2	25.00	24.61	24.45	23.64
			5	24.50	24.32	24.33	23.38
		3	0	24.00	23.58	23.52	23.67
			2	24.00	23.57	23.55	23.21
			3	24.00	23.57	23.55	23.18
	6	0	23.00	22.99	22.97	22.59	
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20415	20525	20635
					825.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	25.00	24.69	24.81	24.43
			7	25.00	24.73	24.71	24.50
			14	25.00	24.68	24.61	24.47
		8	0	24.00	23.72	23.57	23.48
			4	24.00	23.71	23.60	23.46
			7	24.00	23.67	23.51	23.43
	15	0	24.00	23.65	23.55	23.52	
	16QAM	1	0	24.00	23.59	23.81	23.38
			7	24.00	23.58	23.70	23.34
			14	24.00	23.56	23.65	23.38
		8	0	23.00	22.65	22.63	22.43
			4	23.00	22.64	22.64	22.46
			7	23.00	22.66	22.56	22.44
	15	0	23.00	22.61	22.57	22.42	

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20425	20525	20625
					826.5MHz	836.5MHz	846.5MHz
5MHz	QPSK	1	0	25.00	24.73	24.83	24.54
			13	25.00	24.86	24.78	24.54
			24	25.00	24.85	24.71	24.59
		12	0	24.00	23.62	23.62	23.47
			6	24.00	23.66	23.59	23.44
			13	24.00	23.67	23.50	23.40
	25	0	24.00	23.68	23.57	23.43	
	16QAM	1	0	24.00	23.55	23.53	23.48
			13	24.00	23.58	23.53	23.51
			24	24.00	23.59	23.44	23.57
		12	0	23.00	22.63	22.63	22.48
			6	23.00	22.64	22.60	22.48
			13	23.00	22.66	22.47	22.43
	25	0	23.00	22.69	22.60	22.44	

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20450	20525	20600		
					829.0MHz	836.5MHz	844.0MHz		
10MHz	QPSK	1	0	25.00	24.83	24.76	24.49		
			25	25.00	24.78	24.69	24.47		
			49	25.00	24.64	24.53	24.43		
		25	0	24.00	23.70	23.68	23.44		
			13	24.00	23.68	23.67	23.47		
			25	24.00	23.61	23.51	23.38		
		50	0	24.00	23.67	23.62	23.46		
			16QAM	1	0	24.00	23.82	23.70	23.45
					25	24.00	23.77	23.66	23.28
	49	24.00			23.70	23.55	23.29		
	25	0	23.00	22.65	22.65	22.47			
		13	23.00	22.67	22.65	22.44			
		25	23.00	22.56	22.47	22.41			
	50	0	23.00	22.63	22.55	22.43			

Band 7

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		20775	21100	21425		
				2502.5MHz	2535.0MHz	2567.5MHz			
5MHz	QPSK	1	0	23.50	23.04	23.29	23.07		
			12	23.50	23.00	23.23	23.09		
			24	23.50	22.99	23.11	23.07		
		12	0	22.50	21.91	22.11	21.94		
			6	22.50	21.91	22.12	21.91		
			13	22.00	21.82	21.96	21.89		
		25	0	22.50	21.92	22.03	21.88		
			16QAM	1	0	22.50	21.90	22.08	21.81
					12	22.00	21.87	21.94	21.84
	24	22.00			21.75	21.89	21.86		
	12	0	21.50	20.93	21.08	20.89			
		6	21.50	20.95	21.10	20.87			
		13	21.00	20.79	20.93	20.82			
	25	0	21.50	20.92	21.02	20.91			
		10MHz	QPSK	1	0	23.50	22.84	23.24	22.80
24					23.50	22.83	23.14	22.94	
49	23.00				22.74	22.90	22.96		
25	0			22.50	21.87	22.09	21.84		
	12			22.50	21.83	22.07	21.85		
	25			22.00	21.83	21.96	21.86		
50	0			22.50	21.86	22.01	21.86		
	16QAM			1	0	22.50	21.64	22.16	21.78
					24	22.50	21.56	22.07	21.92
49			22.00		21.55	21.88	21.91		
25	0		21.50	20.87	21.06	20.77			
	12		21.50	20.92	21.05	20.77			
	25		21.00	20.80	20.91	20.86			
50	0		21.50	20.83	21.02	20.79			

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		20825	21100	21375		
					2507.5MHz	2535.0MHz	2562.5MHz		
15MHz	QPSK	1	0	23.50	22.88	23.25	22.70		
			38	23.50	22.85	23.12	22.94		
			74	23.00	22.80	22.79	22.95		
		38	0	22.50	21.88	22.19	21.67		
			18	22.50	21.83	22.09	21.91		
			37	22.00	21.79	21.76	21.92		
		75	0	22.00	21.82	21.99	21.85		
			16QAM	1	0	22.50	21.85	22.18	21.66
					38	22.50	21.82	22.09	21.93
	74	22.00			21.79	21.78	21.91		
	38	0	0	22.50	21.86	22.18	21.65		
			18	22.50	21.84	22.10	21.91		
			37	22.00	21.78	21.75	21.92		
	75	0	0	21.00	20.79	20.95	20.74		
			20850	21100	21350	2510.0MHz	2535.0MHz	2560.0MHz	
						22.94	23.26	22.69	
	20MHz	QPSK	1	0	23.50	23.02	23.24	22.98	
				49	23.50	22.99	22.79	23.02	
99				23.50	22.99	22.79	23.02		
50			0	22.50	21.92	22.21	21.78		
			25	22.50	21.89	22.14	21.81		
			50	22.00	21.91	21.86	21.86		
100			0	22.50	21.93	22.04	21.81		
			16QAM	1	0	22.50	21.76	22.07	21.51
					49	22.50	21.86	22.07	21.83
99		22.00			21.88	21.64	21.78		
50		0	0	21.50	20.89	21.18	20.78		
			25	21.50	20.85	21.15	20.77		
			50	21.00	20.93	20.81	20.86		
100		0	0	21.00	20.89	20.99	20.81		

Band 19

LTE-FDD Band 19				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		24025	24075	24125		
					832.5MHz	837.5MHz	842.5MHz		
5MHz	QPSK	1	0	24.50	24.18	24.02	24.11		
			12	24.50	24.09	24.11	23.86		
			25	24.50	24.05	24.03	23.88		
		12	0	23.50	23.06	22.96	22.81		
			6	23.50	23.05	22.96	22.84		
			13	23.00	22.94	22.78	22.77		
		25	0	23.50	23.04	22.88	22.80		
			16QAM	1	0	23.50	23.13	22.89	22.97
					12	23.50	23.08	22.85	22.83
	24	23.50			23.06	22.77	22.87		
	12	0	0	22.50	22.09	21.95	21.86		
			6	22.50	22.08	21.97	21.87		
			13	22.00	21.94	21.78	21.81		
	25	0	0	22.00	21.99	21.91	21.80		

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	24050	24075	24100
					835.0MHz	837.5MHz	840.0MHz
10MHz	QPSK	1	0	24.50	24.03	24.10	23.93
			24	24.50	23.97	24.06	23.87
			49	24.00	23.86	23.86	23.75
		25	0	23.50	23.06	23.00	22.89
			12	23.50	23.07	22.98	22.86
			25	23.00	22.90	22.85	22.86
	16QAM	1	0	23.50	22.90	23.05	22.82
			24	23.50	22.84	23.08	22.72
			49	23.00	22.71	22.84	22.60
		25	0	22.50	22.09	21.96	21.89
			12	22.50	22.07	21.97	21.90
			25	22.00	21.91	21.88	21.88
		50	0	22.00	21.98	21.93	21.86
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	24075
					837.5MHz		
15MHz	QPSK	1	0	24.00		23.88	
			38	24.00		23.85	
			74	24.00		23.57	
		38	0	23.50		23.04	
			18	23.50		23.01	
			37	23.00		22.78	
	75	0	23.00		22.93		
	16QAM	1	0	23.50		23.05	
			38	23.00		22.97	
			74	23.00		22.8	
		38	0	23.50		23.04	
			18	23.50		23.03	
			37	23.00		22.78	
		75	0	22.00		21.89	

Band 25

LTE-FDD Band 25				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		26047	26365	26683
					1850.7MHz	1882.5MHz	1914.3MHz
1.4MHz	QPSK	1	0	23.50	23.08	22.93	23.01
			2	23.50	23.02	22.88	22.95
			5	23.50	23.05	22.90	22.95
		3	0	23.50	23.12	22.93	23.05
			1	23.50	23.11	22.92	23.05
			3	23.50	23.09	22.91	23.01
	6	0	22.50	22.05	21.98	22.06	
	16QAM	1	0	22.00	21.94	21.89	21.93
			2	22.00	21.94	21.89	21.94
			5	22.00	21.93	21.79	21.85
		3	0	22.00	21.93	21.79	21.89
			1	22.00	21.92	21.78	21.91
			3	22.00	21.90	21.73	21.83
		6	0	21.50	20.84	20.98	21.07

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26055	26365	26675
					1851.5MHz	1882.5MHz	1913.5MHz
3MHz	QPSK	1	0	23.50	23.07	23.04	23.20
			8	23.50	23.09	23.05	23.19
			14	23.50	23.06	23.02	23.12
		8	0	22.50	22.03	21.93	22.09
			4	22.50	22.05	21.95	22.10
			7	22.50	22.01	21.89	22.07
	15	0	22.50	22.05	21.91	22.09	
	16QAM	1	0	22.50	22.06	22.06	22.19
			8	22.50	22.08	22.05	22.19
			14	22.50	22.04	22.02	22.15
		8	0	21.50	21.07	20.96	21.12
			4	21.50	21.04	20.96	21.13
			7	21.50	21.03	20.96	21.08
		15	0	21.50	21.04	20.95	21.09

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26065	26365	26665
					1852.5MHz	1882.5MHz	1912.5MHz
5MHz	QPSK	1	0	23.50	23.28	23.27	23.43
			12	23.50	23.27	23.21	23.36
			24	23.50	23.28	23.20	23.29
		12	0	22.50	22.18	22.02	22.14
			6	22.50	22.14	22.05	22.15
			13	22.50	22.01	22.02	22.15
	25	0	22.50	22.11	22.06	22.16	
	16QAM	1	0	22.50	22.07	22.05	22.17
			13	22.50	22.08	21.99	22.14
			24	22.50	22.06	21.97	22.06
		12	0	21.50	21.11	21.04	21.09
			6	21.50	21.14	21.04	21.10
			13	21.50	20.97	20.95	21.13
		25	0	21.50	21.13	21.05	21.18

LTE-FDD Band 25				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		26090	26365	26640
				1855.0MHz	1882.5MHz	1910.0MHz	
10MHz	QPSK	1	0	23.50	23.18	23.09	23.27
			24	23.50	23.21	23.14	23.26
			49	23.50	23.18	23.00	23.09
		25	0	22.50	22.20	21.93	22.23
			12	22.50	22.18	21.97	22.20
			25	22.50	22.14	21.99	22.18
	50	0	22.50	22.16	22.02	22.25	
	16QAM	1	0	22.50	22.14	22.08	22.21
			24	22.50	22.21	22.08	22.21
			49	22.50	22.18	21.99	22.05
		25	0	21.50	21.16	20.93	21.26
			12	21.50	21.17	20.94	21.22
			25	21.50	21.14	20.94	21.18
		50	0	21.50	21.14	20.96	21.19

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26115	26365	26615	
					1857.5MHz	1882.5MHz	1907.5MHz	
15MHz	QPSK	1	0	23.50	23.10	23.06	23.33	
			38	23.50	23.24	23.09	23.33	
			74	23.50	23.08	23.06	23.13	
		36	0	22.50	22.08	22.07	22.34	
			18	22.50	22.19	22.12	22.29	
			37	22.50	22.11	22.04	22.09	
		75	0	22.50	22.17	22.00	22.25	
		16QAM	1	0	22.50	22.08	22.07	22.28
				38	22.50	22.20	22.12	22.29
	74			22.50	22.09	22.05	22.10	
	36		0	22.50	22.09	22.07	22.32	
			18	22.50	22.20	22.13	22.30	
			37	22.50	22.10	22.04	22.11	
	75	0	21.50	21.10	21.00	21.22		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26140	26365	26590
1860.0MHz						1882.5MHz	1905.0MHz	
20MHz	QPSK	1	0	23.50	22.95	23.01	23.11	
			49	23.50	23.12	23.13	23.31	
			99	23.50	22.90	23.08	23.04	
		50	0	22.50	22.15	22.07	22.28	
			25	22.50	22.20	22.08	22.28	
			50	22.50	22.15	22.00	22.20	
		100	0	22.50	22.16	22.05	22.26	
		16QAM	1	0	22.00	21.81	21.86	21.94
				49	22.50	21.99	21.98	22.12
	99			22.00	21.75	21.88	21.85	
	50		0	21.50	21.16	21.01	21.25	
			25	21.50	21.18	21.01	21.24	
			50	21.50	21.20	20.92	21.14	
	100		0	21.50	21.08	21.00	21.23	

Band 26 Part90

LTE-FDD Band 26 Part90				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		26697	26740	26783	
				814.7MHz	819.0MHz	823.3MHz		
1.4MHz	QPSK	1	0	24.50	24.05	24.22	24.33	
			2	24.50	24.05	24.21	24.43	
			5	24.50	24.06	24.24	24.38	
		3	0	24.50	24.11	24.26	24.28	
			1	24.50	24.13	24.24	24.38	
			3	24.50	24.11	24.26	24.37	
		6	0	23.50	23.18	23.32	23.48	
		16QAM	1	0	23.50	22.97	23.03	23.12
				2	23.50	23.08	23.08	23.16
	5			23.50	22.98	23.05	23.12	
	3		0	23.50	22.93	23.18	23.40	
			1	23.50	22.96	23.18	23.36	
			3	23.50	22.95	23.28	23.31	
	6	0	22.50	22.19	22.30	22.39		

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26705	26740	26775
					815.5MHz	819.0MHz	822.5MHz
3MHz	QPSK	1	0	24.50	24.18	24.24	24.48
			8	25.00	24.19	24.21	24.55
			14	25.00	24.21	24.42	24.56
		8	0	23.50	23.23	23.30	23.38
			4	23.50	23.21	23.27	23.37
			7	23.50	23.21	23.31	23.39
	15	0	23.50	23.20	23.29	23.40	
	16QAM	1	0	23.50	23.07	23.01	23.45
			8	24.00	23.08	23.04	23.53
			14	24.00	23.09	23.09	23.56
		8	0	22.50	22.17	22.28	22.42
			4	22.50	22.13	22.27	22.40
			7	22.50	22.17	22.33	22.43
		15	0	22.50	22.11	22.23	22.44

LTE-FDD Band 26 Part90				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		26715	26740	26765	
					816.5MHz	819.0MHz	821.5MHz	
5MHz	QPSK	1	0	24.50	24.30	24.40	24.42	
			12	25.00	24.32	24.56	24.59	
			24	25.00	24.42	24.55	24.64	
		12	0	23.50	23.25	23.31	23.31	
			6	23.50	23.22	23.31	23.34	
			13	23.50	23.23	23.33	23.38	
	25	0	23.50	23.25	23.35	23.42		
	16QAM	1	0	23.50	23.25	23.24	23.31	
			12	23.50	23.31	23.24	23.36	
			24	23.50	23.44	23.33	23.41	
		12	0	22.50	22.25	22.29	22.36	
			6	22.50	22.28	22.28	22.37	
			13	22.50	22.27	22.32	22.38	
		25	0	22.50	22.25	22.38	22.42	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26740	
						819.0MHz		
10MHz	QPSK	1	0	24.50		24.22		
			24	24.50		24.38		
			49	24.50		24.47		
		25	0	23.50		23.29		
			12	23.50		23.28		
			25	23.50		23.40		
	50	0	23.50		23.37			
	16QAM	1	0	23.50		23.05		
			24	23.50		23.21		
			49	23.50		23.34		
		25	0	22.50		22.33		
			12	22.50		22.32		
			25	22.50		22.36		
		50	0	22.50		22.34		

Band 26 Part22

LTE-FDD Band 26 Part22				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		26797	26915	27033	
					824.7MHz	836.5MHz	848.3MHz	
1.4MHz	QPSK	1	0	25.00	24.51	24.36	24.37	
			2	24.50	24.45	24.44	24.34	
			5	25.00	24.51	24.36	24.34	
		3	0	25.00	24.53	24.29	24.41	
			1	25.00	24.53	24.29	24.42	
			3	25.00	24.56	24.42	24.42	
	6	0	24.00	23.52	23.47	23.40		
	16QAM	1	0	23.50	23.43	23.16	23.24	
			2	23.50	23.46	23.22	23.28	
			5	23.50	23.47	23.00	23.29	
		3	0	23.50	23.41	23.42	23.21	
			1	23.50	23.41	23.40	23.21	
			3	23.50	23.35	23.30	23.21	
		6	0	22.50	22.30	22.40	22.23	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26805	26915
						825.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	25.00	24.40	24.58	24.32	
			8	25.00	24.50	24.49	24.30	
			14	24.50	24.41	24.45	24.32	
		8	0	23.50	23.48	23.40	23.34	
			4	23.50	23.47	23.41	23.29	
			7	23.50	23.48	23.37	23.37	
	15	0	23.50	23.48	23.37	23.35		
	16QAM	1	0	24.00	23.22	23.52	23.24	
			8	24.00	23.30	23.52	23.20	
			14	23.50	23.28	23.48	23.20	
		8	0	22.50	22.44	22.43	22.27	
			4	22.50	22.49	22.44	22.28	
			7	23.00	22.50	22.39	22.31	
		15	0	22.50	22.37	22.36	22.28	
		LTE-FDD Band 26 Part22				Maximum Tune-up(dBm)	Conducted Power(dBm)	
Bandwidth		Modulation	RB allocation	RB offset	26815		26915	27015
	826.5MHz				836.5MHz		846.5MHz	
5MHz	QPSK	1	0	25.00	24.54	24.63	24.39	
			12	25.00	24.74	24.62	24.39	
			24	25.00	24.74	24.57	24.45	
		12	0	24.00	23.47	23.50	23.34	
			6	23.50	23.49	23.47	23.32	
			13	24.00	23.54	23.34	23.28	
	25	0	24.00	23.55	23.43	23.33		
	16QAM	1	0	23.50	23.44	23.45	23.35	
			12	23.50	23.47	23.37	23.40	
			24	23.50	23.48	23.34	23.44	
		12	0	22.50	22.49	22.45	22.36	
			6	22.50	22.48	22.47	22.36	
			13	23.00	22.52	22.36	22.31	
		25	0	23.00	22.56	22.44	22.32	

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26840	26915	26990	
					829.0MHz	836.5MHz	844.0MHz	
10MHz	QPSK	1	0	25.00	24.57	24.64	24.41	
			24	25.00	24.69	24.57	24.32	
			49	25.00	24.55	24.49	24.34	
		25	0	24.00	23.51	23.55	23.31	
			12	24.00	23.52	23.55	23.30	
			25	23.50	23.49	23.44	23.29	
	50	0	24.00	23.54	23.45	23.30		
	16QAM	1	0	24.00	23.55	23.58	23.29	
			24	24.00	23.64	23.56	23.16	
			49	24.00	23.51	23.33	23.18	
		25	0	23.00	22.49	22.51	22.30	
			12	23.00	22.52	22.51	22.30	
			25	22.50	22.48	22.37	22.30	
		50	0	23.00	22.51	22.43	22.30	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26865	26915
831.5MHz							836.5MHz	841.5MHz
15MHz	QPSK	1	0	25.00	24.51	24.64	24.32	
			38	25.00	24.69	24.57	24.21	
			74	24.50	24.36	24.23	24.13	
		36	0	24.00	23.49	23.62	23.48	
			18	24.00	23.67	23.57	23.41	
			37	23.50	23.35	23.22	23.32	
	75	0	23.50	23.45	23.41	23.30		
	16QAM	1	0	24.00	23.53	23.62	23.49	
			38	24.00	23.66	23.56	23.40	
			74	23.50	23.36	23.22	23.34	
		36	0	24.00	23.49	23.61	23.48	
			18	24.00	23.66	23.58	23.41	
			37	23.50	23.35	23.23	23.33	
		75	0	22.50	22.35	22.40	22.31	

Band 38

LTE-TDD Band 38				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		37775	38000	38225
				2572.5MHz	2595.0MHz	2617.5MHz	
5MHz	QPSK	1	0	22.00	21.72	21.94	21.97
			13	22.00	21.68	21.89	21.97
			24	22.50	21.60	22.14	21.87
		12	0	21.50	20.72	20.88	21.07
			6	21.50	20.73	20.89	21.08
			13	21.00	20.60	21.00	20.94
	25	0	21.00	20.65	20.97	20.96	
	16QAM	1	0	22.00	21.19	21.29	21.58
			13	22.00	21.07	21.34	21.57
			24	22.00	20.96	21.44	21.54
		12	0	20.50	19.82	19.99	20.04
			6	20.50	19.79	20.00	20.05
			13	20.50	19.68	20.08	20.01
		25	0	20.50	19.95	20.08	20.11

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	37800	38000	38200
					2575.00MHz	2595.00MHz	2615.00MHz
10MHz	QPSK	1	0	22.50	21.97	21.92	22.22
			24	22.50	21.83	22.08	22.08
			49	22.50	21.82	22.15	21.98
		25	0	21.50	20.78	20.81	21.17
			12	21.50	20.79	20.82	21.17
			25	21.50	20.70	21.16	21.00
	50	0	21.50	20.63	21.05	21.14	
	16QAM	1	0	21.50	21.13	20.94	21.26
			24	21.50	21.02	21.21	21.17
			49	21.50	20.93	21.30	21.04
		25	0	21.00	19.90	20.04	20.59
			12	21.00	19.91	20.05	20.59
			25	20.50	19.65	20.26	20.38
		50	0	20.50	19.74	20.10	20.05

LTE-TDD Band 38				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		37825	38000	38175	
					2577.5MHz	2595.0MHz	2612.5MHz	
15MHz	QPSK	1	0	22.50	21.90	21.78	22.34	
			38	22.50	21.70	22.09	22.29	
			74	22.50	21.65	22.24	22.02	
		38	0	21.50	20.72	21.04	21.23	
			18	21.50	20.72	21.04	21.24	
			37	21.50	20.72	21.04	21.24	
	75	0	21.50	20.71	21.05	21.17		
	16QAM	1	0	21.50	21.12	21.13	20.50	
			38	21.50	21.03	20.98	20.65	
			74	21.50	20.91	21.40	20.54	
		38	0	21.50	20.72	21.03	21.23	
			18	21.50	20.72	21.04	21.24	
			37	21.50	20.71	21.05	21.11	
		75	0	20.50	19.80	20.09	20.28	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	37850	38000
						2580.0MHz	2595.0MHz	2610.0MHz
20MHz	QPSK	1	0	22.50	21.65	21.61	22.45	
			49	22.50	21.53	21.84	22.17	
			99	22.50	21.46	22.11	22.35	
		50	0	21.50	20.67	20.83	21.24	
			25	21.50	20.67	20.83	21.25	
			50	21.50	20.57	21.09	21.14	
	100	0	21.50	20.71	20.95	21.19		
	16QAM	1	0	22.00	21.21	20.49	21.52	
			49	22.00	20.85	20.65	21.59	
			99	21.50	20.96	20.91	21.32	
		50	0	20.50	19.99	20.14	20.36	
			25	20.50	19.99	20.14	20.36	
			50	20.50	19.89	20.40	20.07	
		100	0	20.50	19.80	20.05	20.26	

Band 41

LTE-TDD Band 41				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		40065	40590	41215	
					2537.5MHz	2590.0MHz	2652.5MHz	
5MHz	QPSK	1	0	22.50	21.69	21.92	22.45	
			12	23.00	21.65	21.96	22.50	
			24	22.50	21.58	22.02	22.40	
		12	0	22.00	20.63	21.01	21.65	
			6	22.00	20.63	21.00	21.50	
			13	22.00	20.64	21.03	21.54	
	25	0	22.00	20.64	21.03	21.61		
	16QAM	1	0	22.00	21.12	21.26	22.00	
			12	22.00	20.92	21.30	21.97	
			24	22.00	20.88	21.43	21.91	
		12	0	21.00	19.78	20.13	20.56	
			6	21.00	19.78	20.12	20.56	
			13	21.00	19.62	20.12	20.57	
		25	0	21.00	19.80	20.34	20.60	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40090	40590
2540.0MHz							2590.0MHz	2650.0MHz
10MHz	QPSK	1	0	23.00	22.01	22.10	22.77	
			24	23.00	21.84	22.17	22.68	
			49	23.00	21.88	22.27	22.68	
		25	0	22.00	20.63	21.06	21.63	
			12	22.00	20.64	21.07	21.66	
			25	22.00	20.53	21.26	21.67	
	50	0	22.00	20.64	21.24	21.68		
	16QAM	1	0	23.00	21.42	21.18	22.61	
			24	23.00	21.31	21.19	22.55	
			49	22.50	21.38	21.38	22.45	
		25	0	21.00	19.86	20.58	20.95	
			12	21.00	19.87	20.59	20.96	
			25	21.00	19.70	20.71	20.81	
		50	0	21.00	19.80	20.25	20.85	

LTE-TDD Band 41				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		40115	40590	41165	
					2542.5MHz	2590.0MHz	2647.5MHz	
15MHz	QPSK	1	0	23.00	21.95	22.33	22.70	
			38	23.00	21.82	22.46	22.82	
			74	23.00	21.87	22.67	22.54	
		36	0	22.00	20.75	21.14	21.74	
			18	22.00	20.76	21.14	21.75	
			37	22.00	20.77	21.14	21.75	
		75	0	22.00	20.63	21.15	21.75	
		16QAM	1	0	22.50	21.50	20.67	22.08
				38	22.50	21.30	20.73	22.23
	74			22.50	21.43	20.73	22.03	
	36		0	22.00	20.76	21.14	21.75	
			18	22.00	20.77	21.14	21.75	
			37	22.00	20.78	21.15	21.75	
	75	0	21.00	19.82	20.46	20.92		

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40140	40590	41140
					2545.0MHz	2590.0MHz	2645.0MHz
20MHz	QPSK	1	0	22.50	21.80	22.26	22.46
			49	22.50	21.71	22.19	22.55
			99	23.00	21.93	22.76	22.53
		50	0	21.50	20.73	21.21	21.63
			25	21.50	20.75	21.22	21.64
			50	21.50	20.86	21.32	21.61
	100	0	21.50	20.67	21.26	21.59	
	16QAM	1	0	22.00	21.54	21.41	21.12
			49	22.00	21.42	21.53	21.29
			99	22.00	21.70	21.79	21.15
		50	0	21.00	20.06	20.27	20.74
			25	21.00	20.07	20.27	20.75
			50	21.00	20.01	20.51	20.77
		100	0	21.00	19.96	20.42	20.78

Band 66

LTE-FDD Band 66				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		131979	132322	132665	
					1710.7MHz	1745.0MHz	1779.3MHz	
1.4MHz	QPSK	1	0	24.00	23.98	23.68	23.88	
			2	24.00	23.91	23.63	23.86	
			5	24.00	23.91	23.61	23.89	
		3	0	24.50	24.04	23.73	24.00	
			1	24.50	24.02	23.73	23.97	
			3	24.50	24.02	23.63	23.93	
	6	0	23.50	22.99	22.75	23.01		
	16QAM	1	0	23.00	22.83	22.61	22.85	
			2	23.00	22.87	22.61	22.88	
			5	23.00	22.86	22.54	22.79	
		3	0	23.00	22.83	22.56	22.83	
			1	23.00	22.83	22.56	22.83	
			3	23.00	22.81	22.46	22.80	
		6	0	22.50	21.80	21.72	22.03	
							131987	132322
						1711.5MHz	1745.0MHz	1778.5MHz
3MHz	QPSK	1	0	24.50	23.87	23.84	24.05	
			8	24.50	23.85	23.82	24.09	
			14	24.50	23.89	23.74	24.07	
		8	0	23.00	22.97	22.73	22.96	
			4	23.00	22.99	22.74	23.00	
			7	23.00	22.93	22.65	22.98	
	15	0	23.00	22.99	22.70	22.97		
	16QAM	1	0	23.50	22.74	22.86	23.07	
			8	23.50	22.69	22.75	23.06	
			14	23.50	22.75	22.78	23.04	
		8	0	22.50	21.95	21.74	22.02	
			4	22.50	21.97	21.76	22.04	
			7	22.50	21.93	21.68	22.04	
		15	0	22.50	21.90	21.69	22.05	

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131997	132322	132647	
					1712.5MHz	1745.0MHz	1777.5MHz	
5MHz	QPSK	1	0	23.50	23.44	23.21	23.40	
			12	23.50	23.43	23.15	23.44	
			24	23.50	23.41	23.10	23.42	
		12	0	22.50	22.16	22.00	22.27	
			6	22.50	22.19	21.97	22.29	
			13	22.50	22.21	21.91	22.21	
		25	0	22.50	22.21	21.91	22.22	
		16QAM	1	0	22.50	22.19	22.00	22.15
				12	22.50	22.20	21.90	22.17
	24			22.50	22.17	21.84	22.20	
	12		0	21.50	21.17	20.96	21.27	
			6	21.50	21.17	20.96	21.24	
			13	21.50	21.17	20.88	21.19	
	25	0	21.50	21.23	20.95	21.25		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	132022	132322	132622
					1715.0MHz	1745.0MHz	1775.0MHz	
10MHz	QPSK	1	0	23.50	23.32	23.17	23.17	
			24	23.50	23.23	23.06	23.32	
			49	23.50	23.21	22.87	23.28	
		25	0	22.50	22.13	21.99	22.21	
			12	22.50	22.13	21.99	22.21	
			25	22.50	22.11	21.96	22.17	
		50	0	22.50	22.14	21.99	22.22	
		16QAM	1	0	22.50	22.31	22.14	22.10
				24	22.50	22.20	22.05	22.25
	49			22.50	22.18	21.87	22.27	
	25		0	21.50	21.11	20.98	21.18	
			12	21.50	21.11	20.98	21.17	
			25	21.50	21.07	20.95	21.16	
	50	0	21.50	21.09	20.99	21.18		

LTE-FDD Band 66				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		132047	132322	132597	
					1717.5MHz	1745.0MHz	1772.5MHz	
15MHz	QPSK	1	0	23.50	23.29	23.16	22.96	
			38	23.50	23.28	23.07	23.25	
			74	23.50	23.12	22.77	23.26	
		36	0	22.50	22.27	22.18	21.92	
			18	22.50	22.27	22.06	22.21	
			37	22.50	22.13	21.79	22.24	
		75	0	22.50	22.11	21.95	22.12	
		16QAM	1	0	22.50	22.23	22.17	21.92
				38	22.50	22.27	22.04	22.22
	74			22.50	22.13	21.76	22.24	
	36		0	22.50	22.27	22.15	21.91	
			18	22.50	22.26	22.05	22.23	
			37	22.50	22.13	21.76	22.22	
	75	0	21.50	21.05	20.91	21.08		

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	132072	132322	132572	
					1720.0MHz	1745.0MHz	1770.0MHz	
20MHz	QPSK	1	0	23.50	23.10	23.22	22.62	
			49	23.50	23.18	23.10	22.95	
			99	23.50	23.11	22.76	23.04	
		50	0	22.50	22.12	22.06	21.95	
			25	22.50	22.13	22.04	21.91	
			50	22.50	22.12	21.87	21.98	
		100	0	22.50	22.12	21.94	21.98	
		16QAM	1	0	22.50	22.39	22.03	21.90
				49	22.50	22.42	21.90	22.27
	99			22.50	22.36	21.56	22.35	
	50		0	21.50	21.11	21.03	20.96	
			25	21.50	21.12	21.03	20.99	
			50	21.50	21.10	20.89	20.99	
	100	0	21.50	21.05	20.91	20.93		

8.4 Wi-Fi

2.4G

Ant. 1							
Band (GHz)	Mode	Channel	Freq. (MHz)	EIRP(dBm)	Maximum Tune-up(dBm)	SAR Test Require.	
2.4g (2.4~2.4835)	802.11b	1	2412	11.85	12.00	No	
		7	2442	11.95	12.00	No	
		13	2472	12.17	12.50	No	
	802.11g	1	2412	11.91	12.00	No	
		7	2442	11.96	12.00	No	
		13	2472	12.06	12.50	No	
	802.11n(HT20)	1	2412	14.27	14.50	Yes	
		7	2442	14.03	14.50	No	
		13	2472	13.84	14.00	No	
	802.11n(HT40)	3	2422	12.19	12.50	No	
		7	2442	12.21	12.50	No	
		11	2462	12.32	12.50	No	
Ant. 2							
Band (GHz)	Mode	Channel	Freq. (MHz)	EIRP(dBm)	Maximum Tune-up(dBm)	SAR Test Require.	
2.4g (2.4~2.4835)	802.11b	1	2412	11.82	12.00	No	
		7	2442	12.09	12.50	No	
		13	2472	12.15	12.50	Yes	
	802.11g	1	2412	11.71	12.00	No	
		7	2442	11.74	12.00	No	
		13	2472	11.84	12.00	No	
	802.11n(HT20)	1	2412	10.87	11.00	No	
		7	2442	10.96	11.00	No	
		13	2472	10.95	11.00	No	
	802.11n(HT40)	3	2422	10.08	10.50	No	
		7	2442	9.37	9.50	No	
		11	2462	8.54	9.00	No	
	MIMO						
	Band (GHz)	Mode	Channel	Freq. (MHz)	EIRP(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
	2.4g (2.4~2.4835)	802.11n(HT20)	1	2412	14.16	14.50	No
7			2442	14.44	14.50	Yes	
13			2472	14.32	14.50	No	
802.11n(HT40)		3	2422	14.27	14.50	No	
		7	2442	14.03	14.50	No	
		11	2462	13.84	14.00	No	

5G

Ant. 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	11.30	11.50	No
		40	5200	9.99	10.00	No
		48	5240	10.25	10.50	No
	802.11n(HT20)	36	5180	11.28	11.50	No
		40	5200	11.15	11.50	No
		48	5240	10.82	11.00	No
	802.11ac(VHT20)	36	5180	11.58	12.00	No
		40	5200	11.73	12.00	No
		48	5240	11.35	11.50	No
	802.11ax(HE20)	36	5180	12.43	12.50	No
		40	5200	12.72	13.00	No
		48	5240	12.39	12.50	No
	802.11n(HT40)	38	5190	12.06	12.50	No
		46	5230	11.55	12.00	No
	802.11ac(VHT40)	38	5190	12.64	13.00	No
46		5230	12.32	12.50	No	
802.11ax(HE40)	38	5190	12.26	12.50	No	
	46	5230	12.49	12.50	No	
802.11ac(VHT80)	42	5210	11.64	12.00	No	
802.11ax(HE80)	42	5210	14.50	15.00	Yes	
Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11n(HT20)	36	5180	10.61	11.00	No
		40	5200	10.74	11.00	No
		48	5240	10.58	11.00	No
	802.11ac(VHT20)	36	5180	13.02	13.50	No
		40	5200	13.53	14.00	No
		48	5240	13.20	13.50	No
	802.11ax(HE20)	36	5180	13.34	13.50	No
		40	5200	13.47	13.50	No
		48	5240	13.44	13.50	No
	802.11n(HT40)	38	5190	11.90	12.00	No
		46	5230	12.40	12.50	No
	802.11ac(VHT40)	38	5190	13.70	14.00	No
		46	5230	13.67	14.00	No
	802.11ax(HE40)	38	5190	13.74	14.00	No
		46	5230	14.06	14.50	Yes
802.11ac(VHT80)	42	5210	13.81	14.00	No	
802.11ax(HE80)	42	5210	9.96	10.00	No	
MIMO						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11n(HT20)	36	5180	13.97	14.00	No
		40	5200	13.96	14.00	No
		48	5240	13.71	14.00	No
	802.11ac(VHT20)	36	5180	15.92	16.00	No
		40	5200	16.12	16.50	No
		48	5240	15.96	16.00	No
	802.11ax(HE20)	36	5180	15.37	15.50	No
		40	5200	15.73	16.00	No
		48	5240	15.38	15.50	No
	802.11n(HT40)	38	5190	14.99	15.00	No

	802.11ac(VHT40)	46	5230	15.01	15.50	No
		38	5190	16.07	16.50	No
		46	5230	16.36	16.50	Yes
	802.11ax(HE40)	38	5190	16.21	16.50	No
		46	5230	16.06	16.50	No
	802.11ac(VHT80)	42	5210	15.81	16.00	No
802.11ax(HE80)	42	5210	15.87	16.00	No	

Ant. 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11a	52	5260	8.49	8.50	No
		56	5280	9.95	10.00	No
		64	5320	10.64	11.00	No
	802.11n(HT20)	52	5260	10.75	11.00	No
		56	5280	11.64	12.00	No
		64	5320	11.63	12.00	No
	802.11ac(VHT20)	52	5260	11.17	11.50	No
		56	5280	11.82	12.00	No
		64	5320	11.88	12.00	No
	802.11ax(HE20)	52	5260	12.38	12.50	No
		56	5280	12.70	13.00	No
		64	5320	12.70	13.00	No
	802.11n(HT40)	54	5270	11.77	12.00	No
		62	5310	12.06	12.50	No
	802.11ac(VHT40)	54	5270	12.38	12.50	No
62		5310	12.73	13.00	No	
802.11ax(HE40)	54	5270	12.35	12.50	No	
	62	5310	12.60	13.00	No	
802.11ac(VHT80)	58	5290	13.78	14.00	No	
802.11ax(HE80)	58	5290	14.07	14.50	Yes	

Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11n(HT20)	52	5260	10.48	10.50	No
		56	5280	11.35	11.50	No
		64	5320	11.81	12.00	No
	802.11ac(VHT20)	52	5260	13.12	13.50	No
		56	5280	14.16	14.50	No
		64	5320	14.05	14.50	No
	802.11ax(HE20)	52	5260	13.46	13.50	No
		56	5280	14.25	14.50	Yes
		64	5320	14.24	14.50	No
	802.11n(HT40)	54	5270	12.11	12.50	No
		62	5310	13.25	13.50	No
	802.11ac(VHT40)	54	5270	13.55	14.00	No
		62	5310	14.23	14.50	No
	802.11ax(HE40)	54	5270	13.88	14.00	No
		62	5310	10.65	11.00	No
802.11ac(VHT80)	58	5290	14.07	14.50	No	
802.11ax(HE80)	58	5290	10.92	11.00	No	

MIMO						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11n(HT20)	52	5260	13.63	14.00	No
		56	5300	14.51	15.00	No

	802.11ax(HE20)	64	5320	14.73	15.00	No
		52	5260	15.96	16.00	No
		56	5300	16.55	17.00	No
	802.11ac(VHT20)	64	5320	16.55	17.00	No
		52	5260	15.26	15.50	No
		60	5300	16.16	16.50	No
	802.11n(HT40)	64	5320	16.11	16.50	No
		54	5270	14.95	15.00	No
	802.11ax(HE40)	62	5310	15.71	16.00	No
		54	5270	16.19	16.50	No
	802.11ac(VHT40)	62	5310	14.74	15.00	No
		54	5270	16.01	16.50	No
802.11ax(HE80)	62	5310	16.55	17.00	No	
802.11ac(VHT80)	58	5290	15.78	16.00	No	
802.11ac(VHT80)	58	5290	16.94	17.00	Yes	

Ant. 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11a	100	5500	9.31	9.50	No
		120	5600	9.73	10.00	No
		140	5700	11.26	11.50	No
	802.11n(HT20)	100	5500	10.81	11.00	No
		120	5600	10.26	10.50	No
		140	5700	10.41	10.50	No
	802.11ac(VHT20)	100	5500	11.02	11.50	No
		120	5600	10.42	10.50	No
		140	5700	10.92	11.00	No
	802.11ax(HE20)	100	5500	11.33	11.50	No
		120	5600	10.81	11.00	No
		140	5700	11.11	11.50	No
	802.11n(HT40)	102	5510	10.79	11.00	No
		118	5590	10.83	11.00	No
		134	5670	10.43	10.50	No
	802.11ac(VHT40)	102	5510	11.54	12.00	No
		118	5590	11.37	11.50	No
		134	5670	10.78	11.00	No
	802.11ax(HE40)	102	5510	11.59	12.00	No
		118	5590	11.38	11.50	No
		134	5670	11.41	11.50	No
	802.11ac(VHT80)	106	5530	13.82	14.00	Yes
		122	5610	11.15	11.50	No
	802.11ax(HE80)	106	5530	10.09	10.50	No
122		5610	8.66	9.00	No	
Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11n(HT20)	100	5500	10.87	11.00	No
		120	5600	9.64	10.00	No
		140	5700	9.96	10.00	No
	802.11ac(VHT20)	100	5500	13.47	13.50	No
		120	5600	11.93	12.00	No
		140	5700	11.81	12.00	No
	802.11ax(HE20)	100	5500	13.59	14.00	Yes
		120	5600	12.00	12.50	No

MIMO							
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.	
U-NII-2c (5.470~5.725)	802.11n(HT40)	140	5700	12.12	12.50	No	
		102	5510	12.40	12.50	No	
		118	5590	11.43	11.50	No	
		134	5670	11.08	11.50	No	
	802.11ac(VHT40)	102	5510	13.33	13.50	No	
		118	5590	12.40	12.50	No	
		134	5670	11.18	11.50	No	
	802.11ax(HE40)	102	5510	9.76	10.00	No	
		118	5590	9.33	9.50	No	
		134	5670	8.00	8.50	No	
	802.11ac(VHT80)	106	5530	12.93	13.00	No	
		122	5610	11.96	12.00	No	
	802.11ax(HE80)	106	5530	9.44	9.50	No	
		122	5610	8.15	8.50	No	
	U-NII-2c (5.470~5.725)	802.11n(HT20)	100	5500	13.85	14.00	No
			116	5600	12.97	13.00	No
140			5700	13.20	13.50	No	
802.11ax(HE20)		100	5500	15.62	16.00	No	
		116	5600	14.46	14.50	No	
		140	5700	14.65	15.00	No	
802.11ac(VHT20)		100	5500	15.43	15.50	No	
		116	5600	14.25	14.50	No	
		140	5700	14.40	14.50	No	
802.11n(HT40)		102	5510	14.68	15.00	No	
		110	5590	14.15	14.50	No	
		134	5670	13.78	14.00	No	
802.11ax(HE40)		102	5510	13.78	14.00	No	
		110	5590	13.49	13.50	No	
		134	5670	13.04	13.50	No	
802.11ac(VHT40)		102	5510	15.54	16.00	No	
	110	5590	14.93	15.00	No		
	134	5670	13.99	14.00	No		
802.11ax(HE80)	106	5530	12.79	13.00	No		
	122	5610	11.42	11.50	No		
802.11ac(VHT80)	106	5530	16.41	16.50	Yes		
	122	5610	14.58	15.00	No		
802.11n(HT20)	100	5500	13.85	14.00	No		
	116	5600	12.97	13.00	No		

Ant. 1						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	10.21	10.50	No
		157	5785	9.57	10.00	No
		165	5825	9.73	10.00	No
	802.11n(HT20)	149	5745	9.50	10.00	No
		157	5785	9.24	9.50	No
		165	5825	9.45	9.50	No
	802.11ac(VHT20)	149	5745	10.08	10.50	No
		157	5785	10.00	10.50	No
		165	5825	10.03	10.50	No
	802.11ax(HE20)	149	5745	10.49	10.50	No

	802.11n(HT40)	157	5785	10.29	10.50	No
		165	5825	10.32	10.50	No
		151	5755	9.29	9.50	No
		159	5795	9.71	10.00	No
	802.11ac(VHT40)	151	5755	10.43	10.50	No
		159	5795	10.78	11.00	Yes
	802.11ax(HE40)	151	5755	9.90	10.00	No
		159	5795	10.45	10.50	No
802.11ac(VHT80)	155	5775	10.72	11.00	No	
802.11ax(HE80)	155	5775	10.28	10.50	No	
Ant. 2						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11n(HT20)	149	5745	7.98	8.00	No
		157	5785	8.93	9.00	No
		165	5825	9.80	10.00	No
	802.11ac(VHT20)	149	5745	10.63	11.00	No
		157	5785	11.17	11.50	No
		165	5825	11.46	11.50	No
	802.11ax(HE20)	149	5745	11.21	11.50	No
		157	5785	11.69	12.00	No
		165	5825	-10.42	-10.00	No
	802.11n(HT40)	151	5755	10.70	11.00	No
		159	5795	11.53	12.00	No
	802.11ac(VHT40)	151	5755	11.13	11.50	No
		159	5795	11.70	12.00	Yes
	802.11ax(HE40)	151	5755	7.57	8.00	No
159		5795	9.75	10.00	No	
802.11ac(VHT80)	155	5775	11.45	11.50	No	
802.11ax(HE80)	155	5775	7.33	7.50	No	
MIMO						
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11n(HT20)	149	5745	11.82	12.00	No
		157	5785	12.10	12.50	No
		165	5825	12.64	13.00	No
	802.11ax(HE20)	149	5745	13.88	14.00	No
		157	5785	14.06	14.50	No
		165	5825	10.36	10.50	No
	802.11ac(VHT20)	149	5745	13.37	13.50	No
		157	5785	13.63	14.00	No
		165	5825	13.81	14.00	No
	802.11n(HT40)	151	5755	13.06	13.50	No
		159	5795	13.72	14.00	No
	802.11ax(HE40)	151	5755	11.90	12.00	No
		159	5795	13.12	13.50	No
	802.11ac(VHT40)	151	5755	13.80	14.00	No
159		5795	14.27	14.50	Yes	
802.11ax(HE80)	155	5775	12.06	12.50	No	
802.11ac(VHT80)	155	5775	14.11	14.50	No	

8.5 Bluetooth

EDR	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
	GFSK	12.00	10.01	8.03	11.50
	π/4QPSK	12.00	9.68	7.01	11.47
	8DPSK	11.50	8.04	7.13	11.17

BLE	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	20	39
			2402MHz	2440MHz	2480MHz
	1Mbps	-2.00	-2.74	-2.79	-3.28
	2Mbps	-2.00	-2.67	-2.75	-3.47

8.6 NFC

Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)
	13.56MHz
-36.00	-36.21

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Exclusion thresholds for 1-g SAR(mW)	RF exposure evaluation required
78	2.480	12.00	15.85	0	2.72	Yes
78	2.480	12.00	15.85	10	10.17	Yes
/	0.01356	-36.00	2.51x10 ⁻⁴	0	71	No

Note

- Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at test separation distances ≤ 40 cm are determined by:

$$P_{th} (mW) = \begin{cases} ERP_{20\text{ cm}}(d/20\text{ cm})^x & d \leq 20\text{ cm} \\ ERP_{20\text{ cm}} & 20\text{ cm} < d \leq 40\text{ cm} \end{cases} \quad (B.2)$$

where

$$P_{th} (mW) = ERP_{20\text{ cm}} (mW) = \begin{cases} 2040f & 0.3\text{ GHz} \leq f < 1.5\text{ GHz} \\ 3060 & 1.5\text{ GHz} \leq f \leq 6\text{ GHz} \end{cases} \quad (B.1)$$


$$x = -\log_{10} \left(\frac{60}{ERP_{20\text{ cm}} \sqrt{f}} \right)$$

and *f* is in GHz, *d* is the separation distance (cm), and *ERP*_{20cm} is per Formula (B.1).

- *When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.
- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
 - The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

9. Test Exclusion Consideration

Antenna information:

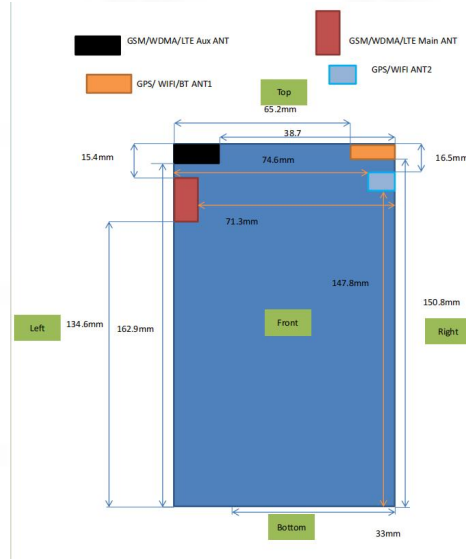

WWAN Main Antenna	GSM/WCDMA/LTE TX/RX
WLAN/BT Antenna	WLAN/BT TX/RX
Note:	
1. KDB 447498 D04v01, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 2.5cm.	
2. Per KDB648474 D04, 10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR < 1.2W/Kg.	

Distance of The Antenna to the EUT surface and edge (mm)						
Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	<25	<25	<25	71.3	<25	134.6
BT/Wifi ANT1	<25	<25	65.2	<25	<25	150.8
Wifi ANT2	<25	<25	74.6	<25	<25	147.8
Positions for SAR tests: Hotspot mode						
Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	Yes	Yes	Yes	No	Yes	No
BT/Wifi ANT1	Yes	Yes	No	Yes	Yes	No
Wifi ANT2	Yes	Yes	No	Yes	Yes	No

9.1 SAR Test Exclusion Consideration Table

Per KDB 447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following format to determine simultaneous transmission SAR test exclusion:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

0.4 W/Kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Mode	Channel	Frequency (GHz)	Max tune-up power (dBm)	Max. Power (mW)	Exposure Position	Head	Body-worn
					Test Dist.(mm)	0	10
NFC	/	0.01356	-36.00	2.51×10^{-4}	Estimated SAR(W/kg)	3.74×10^{-7}	4.54×10^{-7}

10. Test Result

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 850 (voice)	Left Cheek	251	848.8	2.410	0.081	100.00	1.000	32.42	32.50	1.019	0.083	/
	Left Tilt	251	848.8	-1.620	0.062	100.00	1.000	32.42	32.50	1.019	0.063	/
	Right Cheek	251	848.8	-3.900	0.093	100.00	1.000	32.42	32.50	1.019	0.095	1#
	Right Tilt	251	848.8	0.350	0.070	100.00	1.000	32.42	32.50	1.019	0.071	/

Body(10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 850 (voice)	Front	251	848.8	3.250	0.205	100.00	1.000	32.42	32.50	1.019	0.209	/
	Back	251	848.8	-4.210	0.238	100.00	1.000	32.42	32.50	1.019	0.243	/
	Left	251	848.8	0.770	0.194	100.00	1.000	32.42	32.50	1.019	0.198	/
	Top	251	848.8	1.640	0.147	100.00	1.000	32.42	32.50	1.019	0.150	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GPRS 850+2slots	Front	128	824.2	1.650	0.221	100.00	1.000	30.08	30.50	1.102	0.244	/
	Back	128	824.2	-4.640	0.242	100.00	1.000	30.08	30.50	1.102	0.267	2#
	Left	128	824.2	-0.490	0.202	100.00	1.000	30.08	30.50	1.102	0.223	/
	Top	128	824.2	2.360	0.189	100.00	1.000	30.08	30.50	1.102	0.208	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 1900 (voice)	Left Cheek	512	1850.2	2.620	0.122	100.00	1.000	28.53	29.00	1.114	0.136	/
	Left Tilt	512	1850.2	-0.550	0.090	100.00	1.000	28.53	29.00	1.114	0.100	/
	Right Cheek	512	1850.2	1.820	0.140	100.00	1.000	28.53	29.00	1.114	0.156	3#
	Right Tilt	512	1850.2	1.160	0.104	100.00	1.000	28.53	29.00	1.114	0.116	/

Body(10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 1900 (voice)	Front	512	1850.2	-4.490	0.116	100.00	1.000	28.53	29.00	1.114	0.129	/
	Back	512	1850.2	1.210	0.437	100.00	1.000	28.53	29.00	1.114	0.487	/
	Left	512	1850.2	3.560	0.289	100.00	1.000	28.53	29.00	1.114	0.322	/
	Top	512	1850.2	-2.780	0.341	100.00	1.000	28.53	29.00	1.114	0.380	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GPRS 1900+3slots	Front	512	1850.2	0.280	0.135	100.00	1.000	24.83	25.00	1.040	0.140	/
	Back	512	1850.2	3.780	0.489	100.00	1.000	24.83	25.00	1.040	0.509	4#
	Left	512	1850.2	-3.450	0.299	100.00	1.000	24.83	25.00	1.040	0.311	/
	Top	512	1850.2	-0.630	0.362	100.00	1.000	24.83	25.00	1.040	0.376	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Left Cheek	9262	1852.4	3.290	0.140	100.00	1.000	21.60	22.00	1.096	0.153	/
	Left Tilt	9262	1852.4	0.460	0.134	100.00	1.000	21.60	22.00	1.096	0.147	/
	Right Cheek	9262	1852.4	2.750	0.146	100.00	1.000	21.60	22.00	1.096	0.160	5#
	Right Tilt	9262	1852.4	-1.710	0.141	100.00	1.000	21.60	22.00	1.096	0.155	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Front	9262	1852.4	2.120	0.197	100.00	1.000	21.60	22.00	1.096	0.216	/
	Back	9262	1852.4	1.240	0.597	100.00	1.000	21.60	22.00	1.096	0.654	6#
	Left	9262	1852.4	0.460	0.233	100.00	1.000	21.60	22.00	1.096	0.255	/
	Top	9262	1852.4	-2.680	0.412	100.00	1.000	21.60	22.00	1.096	0.452	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 4	Left Cheek	1413	1732.6	0.590	0.142	100.00	1.000	21.58	22.00	1.102	0.156	/

(RMC*)	Left Tilt	1413	1732.6	-1.270	0.136	100.00	1.000	21.58	22.00	1.102	0.150	/
	Right Cheek	1413	1732.6	-2.010	0.158	100.00	1.000	21.58	22.00	1.102	0.174	7#
	Right Tilt	1413	1732.6	4.660	0.148	100.00	1.000	21.58	22.00	1.102	0.163	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 4 (RMC*)	Front	1413	1732.6	2.570	0.245	100.00	1.000	21.58	22.00	1.102	0.270	/
	Back	1413	1732.6	-3.770	0.489	100.00	1.000	21.58	22.00	1.102	0.539	8#
	Left	1413	1732.6	0.320	0.288	100.00	1.000	21.58	22.00	1.102	0.317	/
	Top	1413	1732.6	1.790	0.322	100.00	1.000	21.58	22.00	1.102	0.355	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Left Cheek	4132	826.4	0.320	0.062	100.00	1.000	16.74	17.00	1.062	0.066	/
	Left Tilt	4132	826.4	-3.660	0.047	100.00	1.000	16.74	17.00	1.062	0.050	/
	Right Cheek	4132	826.4	1.770	0.072	100.00	1.000	16.74	17.00	1.062	0.076	9#
	Right Tilt	4132	826.4	2.440	0.051	100.00	1.000	16.74	17.00	1.062	0.054	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Front	4132	826.4	1.260	0.131	100.00	1.000	16.74	17.00	1.062	0.139	/
	Back	4132	826.4	-3.320	0.298	100.00	1.000	16.74	17.00	1.062	0.316	10#
	Left	4132	826.4	4.120	0.116	100.00	1.000	16.74	17.00	1.062	0.123	/
	Top	4132	826.4	-3.890	0.103	100.00	1.000	16.74	17.00	1.062	0.109	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 2 (BW: 20MHz)	1RB	Left Cheek	19100	1900.0	1.410	0.197	100.00	1.000	23.35	23.50	1.035	0.204	/
		Left Tilt	19100	1900.0	3.220	0.168	100.00	1.000	23.35	23.50	1.035	0.174	/
		Right Cheek	19100	1900.0	4.600	0.223	100.00	1.000	23.35	23.50	1.035	0.231	11#
		Right Tilt	19100	1900.0	2.340	0.189	100.00	1.000	23.35	23.50	1.035	0.196	/
	50%RB	Left Cheek	19100	1900.0	0.860	0.182	100.00	1.000	22.14	22.50	1.086	0.198	/
		Left Tilt	19100	1900.0	2.430	0.157	100.00	1.000	22.14	22.50	1.086	0.171	/
		Right Cheek	19100	1900.0	-3.660	0.210	100.00	1.000	22.14	22.50	1.086	0.228	/
		Right Tilt	19100	1900.0	-0.290	0.171	100.00	1.000	22.14	22.50	1.086	0.186	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 2 (BW: 20MHz)	1RB	Front	19100	1900.0	1.630	0.498	100.00	1.000	23.35	23.50	1.035	0.515	/
		Back	18700	1860.0	2.040	0.974	100.00	1.000	22.98	23.00	1.005	0.979	/
		Back	18900	1880.0	3.950	0.952	100.00	1.000	22.84	23.00	1.038	0.988	/
		Back	19100	1900.0	-2.530	1.022	100.00	1.000	23.35	23.50	1.035	1.058	12#
		Back(repeated)	19100	1900.0	-1.440	0.997	100.00	1.000	23.35	23.50	1.035	1.032	/
		Left	19100	1900.0	0.650	0.613	100.00	1.000	23.35	23.50	1.035	0.634	/
	50%RB	Top	19100	1900.0	0.140	0.855	100.00	1.000	23.35	23.50	1.035	0.885	/
		Front	19100	1900.0	2.640	0.321	100.00	1.000	22.14	22.50	1.086	0.349	/
		Back	19100	1900.0	-0.580	0.965	100.00	1.000	22.14	22.50	1.086	1.048	/
		Left	19100	1900.0	2.260	0.485	100.00	1.000	22.14	22.50	1.086	0.527	/
		Top	19100	1900.0	-1.690	0.710	100.00	1.000	22.14	22.50	1.086	0.771	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 4 (BW: 20MHz)	1RB	Left Cheek	20300	1745.0	2.230	0.205	100.00	1.000	23.04	23.50	1.112	0.228	/
		Left Tilt	20300	1745.0	-3.450	0.173	100.00	1.000	23.04	23.50	1.112	0.192	/
		Right Cheek	20300	1745.0	-1.000	0.227	100.00	1.000	23.04	23.50	1.112	0.252	13#
		Right Tilt	20300	1745.0	2.680	0.186	100.00	1.000	23.04	23.50	1.112	0.207	/
	50%RB	Left Cheek	20300	1745.0	-1.740	0.196	100.00	1.000	21.67	22.00	1.079	0.211	/
		Left Tilt	20300	1745.0	2.850	0.161	100.00	1.000	21.67	22.00	1.079	0.174	/
		Right Cheek	20300	1745.0	-0.620	0.218	100.00	1.000	21.67	22.00	1.079	0.235	/
		Right Tilt	20300	1745.0	4.780	0.175	100.00	1.000	21.67	22.00	1.079	0.189	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 4 (BW: 20MHz)	1RB	Front	20300	1745.0	2.350	0.305	100.00	1.000	23.04	23.50	1.112	0.339	/
		Back	20300	1745.0	-3.390	0.406	100.00	1.000	23.04	23.50	1.112	0.451	14#
		Left	20300	1745.0	0.460	0.351	100.00	1.000	23.04	23.50	1.112	0.390	/
		Top	20300	1745.0	-2.690	0.367	100.00	1.000	23.04	23.50	1.112	0.408	/
	50%RB	Front	20300	1745.0	0.260	0.288	100.00	1.000	21.67	22.00	1.079	0.311	/
		Back	20300	1745.0	2.490	0.389	100.00	1.000	21.67	22.00	1.079	0.420	/
		Left	20300	1745.0	1.550	0.339	100.00	1.000	21.67	22.00	1.079	0.366	/
		Top	20300	1745.0	3.480	0.342	100.00	1.000	21.67	22.00	1.079	0.369	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 5 (BW: 10MHz)	1RB	Left Cheek	20450	829.0	4.530	0.081	100.00	1.000	24.83	25.00	1.040	0.084	/
		Left Tilt	20450	829.0	-3.820	0.072	100.00	1.000	24.83	25.00	1.040	0.075	/
		Right Cheek	20450	829.0	2.010	0.091	100.00	1.000	24.83	25.00	1.040	0.095	15#
		Right Tilt	20450	829.0	1.890	0.086	100.00	1.000	24.83	25.00	1.040	0.089	/
	50%RB	Left Cheek	20450	829.0	0.520	0.071	100.00	1.000	23.70	24.00	1.072	0.076	/
		Left Tilt	20450	829.0	1.420	0.064	100.00	1.000	23.70	24.00	1.072	0.069	/
		Right Cheek	20450	829.0	0.360	0.085	100.00	1.000	23.70	24.00	1.072	0.091	/
		Right Tilt	20450	829.0	2.750	0.080	100.00	1.000	23.70	24.00	1.072	0.086	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 5 (BW: 10MHz)	1RB	Front	20450	829.0	2.250	0.195	100.00	1.000	24.83	25.00	1.040	0.203	/
		Back	20450	829.0	-4.360	0.231	100.00	1.000	24.83	25.00	1.040	0.240	16#
		Left	20450	829.0	0.330	0.170	100.00	1.000	24.83	25.00	1.040	0.177	/
		Top	20450	829.0	1.760	0.147	100.00	1.000	24.83	25.00	1.040	0.153	/
	50%RB	Front	20450	829.0	-4.650	0.181	100.00	1.000	23.70	24.00	1.072	0.194	/
		Back	20450	829.0	2.700	0.214	100.00	1.000	23.70	24.00	1.072	0.229	/
		Left	20450	829.0	-0.890	0.159	100.00	1.000	23.70	24.00	1.072	0.170	/
		Top	20450	829.0	3.560	0.134	100.00	1.000	23.70	24.00	1.072	0.144	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 7 (BW: 20MHz)	1RB	Left Cheek	21100	2535.0	4.220	0.177	100.00	1.000	23.26	23.50	1.057	0.187	/
		Left Tilt	21100	2535.0	-3.050	0.157	100.00	1.000	23.26	23.50	1.057	0.166	/
		Right Cheek	21100	2535.0	2.910	0.187	100.00	1.000	23.26	23.50	1.057	0.198	17#
		Right Tilt	21100	2535.0	2.460	0.168	100.00	1.000	23.26	23.50	1.057	0.178	/
	50%RB	Left Cheek	21100	2535.0	-1.870	0.166	100.00	1.000	22.21	22.50	1.069	0.177	/
		Left Tilt	21100	2535.0	2.540	0.139	100.00	1.000	22.21	22.50	1.069	0.149	/
		Right Cheek	21100	2535.0	2.470	0.179	100.00	1.000	22.21	22.50	1.069	0.191	/
		Right Tilt	21100	2535.0	-0.840	0.148	100.00	1.000	22.21	22.50	1.069	0.158	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 7 (BW: 20MHz)	1RB	Front	21100	2535.0	1.510	0.279	100.00	1.000	23.26	23.50	1.057	0.295	/
		Back	21100	2535.0	2.480	0.713	100.00	1.000	23.26	23.50	1.057	0.754	18#
		Left	21100	2535.0	-2.690	0.468	100.00	1.000	23.26	23.50	1.057	0.495	/
		Top	21100	2535.0	4.920	0.587	100.00	1.000	23.26	23.50	1.057	0.620	/
	50%RB	Front	21100	2535.0	2.390	0.204	100.00	1.000	22.21	22.50	1.069	0.218	/
		Back	21100	2535.0	-0.990	0.635	100.00	1.000	22.21	22.50	1.069	0.679	/
		Left	21100	2535.0	3.100	0.338	100.00	1.000	22.21	22.50	1.069	0.361	/
		Top	21100	2535.0	1.470	0.421	100.00	1.000	22.21	22.50	1.069	0.450	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 19 (BW: 15MHz)	1RB	Left Cheek	24075	837.5	2.160	0.141	100.00	1.000	23.88	24.00	1.028	0.145	/
		Left Tilt	24075	837.5	-1.540	0.128	100.00	1.000	23.88	24.00	1.028	0.132	/
		Right Cheek	24075	837.5	-4.130	0.148	100.00	1.000	23.88	24.00	1.028	0.152	19#

	50%RB	Right Tilt	24075	837.5	2.890	0.135	100.00	1.000	23.88	24.00	1.028	0.139	/
		Left Cheek	24075	837.5	1.360	0.127	100.00	1.000	23.04	23.50	1.112	0.141	/
		Left Tilt	24075	837.5	-2.280	0.118	100.00	1.000	23.04	23.50	1.112	0.131	/
		Right Cheek	24075	837.5	-3.190	0.136	100.00	1.000	23.04	23.50	1.112	0.151	/
		Right Tilt	24075	837.5	-0.230	0.120	100.00	1.000	23.04	23.50	1.112	0.133	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 19 (BW: 15MHz)	1RB	Front	24075	837.5	4.820	0.221	100.00	1.000	23.88	24.00	1.028	0.227	/
		Back	24075	837.5	-2.030	0.247	100.00	1.000	23.88	24.00	1.028	0.254	20#
		Left	24075	837.5	2.450	0.203	100.00	1.000	23.88	24.00	1.028	0.209	/
		Top	24075	837.5	-3.640	0.186	100.00	1.000	23.88	24.00	1.028	0.191	/
	50%RB	Front	24075	837.5	0.770	0.209	100.00	1.000	23.04	23.50	1.112	0.232	/
		Back	24075	837.5	1.520	0.227	100.00	1.000	23.04	23.50	1.112	0.252	/
		Left	24075	837.5	3.260	0.191	100.00	1.000	23.04	23.50	1.112	0.212	/
		Top	24075	837.5	0.110	0.178	100.00	1.000	23.04	23.50	1.112	0.198	/
Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 25 (BW: 20MHz)	1RB	Left Cheek	26590	1905.0	2.420	0.192	100.00	1.000	23.31	23.50	1.045	0.201	/
		Left Tilt	26590	1905.0	0.690	0.174	100.00	1.000	23.31	23.50	1.045	0.182	/
		Right Cheek	26590	1905.0	-3.480	0.202	100.00	1.000	23.31	23.50	1.045	0.211	21#
		Right Tilt	26590	1905.0	1.540	0.185	100.00	1.000	23.31	23.50	1.045	0.193	/
	50%RB	Left Cheek	26590	1905.0	-3.230	0.163	100.00	1.000	22.28	22.50	1.052	0.171	/
		Left Tilt	26590	1905.0	-2.630	0.145	100.00	1.000	22.28	22.50	1.052	0.153	/
		Right Cheek	26590	1905.0	4.810	0.188	100.00	1.000	22.28	22.50	1.052	0.198	/
		Right Tilt	26590	1905.0	0.970	0.152	100.00	1.000	22.28	22.50	1.052	0.160	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 25 (BW: 20MHz)	1RB	Front	26590	1905.0	1.250	0.278	100.00	1.000	23.31	23.50	1.045	0.291	/
		Back	26140	1860.0	3.010	0.817	100.00	1.000	23.12	23.50	1.091	0.891	/
		Back	26365	1882.5	-4.550	0.826	100.00	1.000	23.13	23.50	1.089	0.900	/
		Back	26590	1905.0	0.490	0.881	100.00	1.000	23.31	23.50	1.045	0.921	22#
		Back(repeated)	26590	1905.0	-3.620	0.869	100.00	1.000	23.31	23.50	1.045	0.908	/
		Left	26590	1905.0	-2.770	0.495	100.00	1.000	23.31	23.50	1.045	0.517	/
	50%RB	Top	26590	1905.0	0.630	0.642	100.00	1.000	23.31	23.50	1.045	0.671	/
		Front	26590	1905.0	1.560	0.199	100.00	1.000	22.28	22.50	1.052	0.209	/
		Back	26590	1905.0	3.740	0.798	100.00	1.000	22.28	22.50	1.052	0.839	/
		Left	26590	1905.0	2.980	0.401	100.00	1.000	22.28	22.50	1.052	0.422	/
		Top	26590	1905.0	-1.480	0.513	100.00	1.000	22.28	22.50	1.052	0.540	/
		Right Tilt	26590	1905.0	0.970	0.152	100.00	1.000	22.28	22.50	1.052	0.160	/
Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 26 Part 90 (BW: 10MHz)	1RB	Left Cheek	26740	819.0	2.150	0.129	100.00	1.000	24.47	24.50	1.007	0.130	/
		Left Tilt	26740	819.0	-4.890	0.114	100.00	1.000	24.47	24.50	1.007	0.115	/
		Right Cheek	26740	819.0	-3.880	0.139	100.00	1.000	24.47	24.50	1.007	0.140	23#
		Right Tilt	26740	819.0	1.650	0.122	100.00	1.000	24.47	24.50	1.007	0.123	/
	50%RB	Left Cheek	26740	819.0	-1.580	0.121	100.00	1.000	23.40	23.50	1.023	0.124	/
		Left Tilt	26740	819.0	-0.320	0.103	100.00	1.000	23.40	23.50	1.023	0.105	/
		Right Cheek	26740	819.0	2.050	0.131	100.00	1.000	23.40	23.50	1.023	0.134	/
		Right Tilt	26740	819.0	3.410	0.116	100.00	1.000	23.40	23.50	1.023	0.119	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 26 Part 90 (BW: 10MHz)	1RB	Front	26740	819.0	0.860	0.198	100.00	1.000	24.47	24.50	1.007	0.199	/
		Back	26740	819.0	-3.070	0.220	100.00	1.000	24.47	24.50	1.007	0.222	24#
		Left	26740	819.0	2.310	0.175	100.00	1.000	24.47	24.50	1.007	0.176	/
		Top	26740	819.0	-4.880	0.149	100.00	1.000	24.47	24.50	1.007	0.150	/
	50%RB	Front	26740	819.0	3.610	0.186	100.00	1.000	23.40	23.50	1.023	0.190	/
		Back	26740	819.0	-1.590	0.204	100.00	1.000	23.40	23.50	1.023	0.209	/
		Left	26740	819.0	2.570	0.161	100.00	1.000	23.40	23.50	1.023	0.165	/
		Top	26740	819.0	-0.070	0.138	100.00	1.000	23.40	23.50	1.023	0.141	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band26 part 22 (BW: 15MHz)	1RB	Left Cheek	26865	831.5	2.160	0.117	100.00	1.000	24.69	25.00	1.074	0.126	/
		Left Tilt	26865	831.5	3.460	0.096	100.00	1.000	24.69	25.00	1.074	0.103	/
		Right Cheek	26865	831.5	-0.840	0.126	100.00	1.000	24.69	25.00	1.074	0.135	25#
		Right Tilt	26865	831.5	-3.680	0.108	100.00	1.000	24.69	25.00	1.074	0.116	/
	50%RB	Left Cheek	26865	831.5	2.690	0.104	100.00	1.000	23.67	24.00	1.079	0.112	/
		Left Tilt	26865	831.5	-1.880	0.084	100.00	1.000	23.67	24.00	1.079	0.091	/
		Right Cheek	26865	831.5	3.100	0.111	100.00	1.000	23.67	24.00	1.079	0.120	/
		Right Tilt	26865	831.5	2.050	0.094	100.00	1.000	23.67	24.00	1.079	0.101	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band26 part 22 (BW: 15MHz)	1RB	Front	26865	831.5	2.850	0.232	100.00	1.000	24.69	25.00	1.074	0.249	/
		Back	26865	831.5	-4.120	0.260	100.00	1.000	24.69	25.00	1.074	0.279	26#
		Left	26865	831.5	3.470	0.208	100.00	1.000	24.69	25.00	1.074	0.223	/
		Top	26865	831.5	-2.160	0.189	100.00	1.000	24.69	25.00	1.074	0.203	/
	50%RB	Front	26865	831.5	-0.330	0.211	100.00	1.000	23.67	24.00	1.079	0.228	/
		Back	26865	831.5	2.210	0.237	100.00	1.000	23.67	24.00	1.079	0.256	/
		Left	26865	831.5	0.930	0.182	100.00	1.000	23.67	24.00	1.079	0.196	/
		Top	26865	831.5	-2.500	0.166	100.00	1.000	23.67	24.00	1.079	0.179	/
Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 38 (BW: 20MHz)	1RB	Left Cheek	38150	2610.0	2.150	0.157	100.00	1.000	22.45	22.50	1.012	0.159	/
		Left Tilt	38150	2610.0	-3.540	0.149	100.00	1.000	22.45	22.50	1.012	0.151	/
		Right Cheek	38150	2610.0	1.550	0.169	100.00	1.000	22.45	22.50	1.012	0.171	27#
		Right Tilt	38150	2610.0	0.620	0.162	100.00	1.000	22.45	22.50	1.012	0.164	/
	50%RB	Left Cheek	38150	2610.0	-4.820	0.144	100.00	1.000	21.25	21.50	1.059	0.152	/
		Left Tilt	38150	2610.0	0.790	0.136	100.00	1.000	21.25	21.50	1.059	0.144	/
		Right Cheek	38150	2610.0	3.310	0.158	100.00	1.000	21.25	21.50	1.059	0.167	/
		Right Tilt	38150	2610.0	-1.220	0.151	100.00	1.000	21.25	21.50	1.059	0.160	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 38 (BW: 20MHz)	1RB	Front	38150	2610.0	-3.260	0.146	100.00	1.000	22.45	22.50	1.012	0.148	/
		Back	38150	2610.0	3.710	0.254	100.00	1.000	22.45	22.50	1.012	0.257	28#
		Left	38150	2610.0	0.140	0.184	100.00	1.000	22.45	22.50	1.012	0.186	/
		Top	38150	2610.0	1.620	0.217	100.00	1.000	22.45	22.50	1.012	0.220	/
	50%RB	Front	38150	2610.0	4.740	0.114	100.00	1.000	21.25	21.50	1.059	0.121	/
		Back	38150	2610.0	0.830	0.239	100.00	1.000	21.25	21.50	1.059	0.253	/
		Left	38150	2610.0	-2.900	0.152	100.00	1.000	21.25	21.50	1.059	0.161	/
		Top	38150	2610.0	-0.060	0.206	100.00	1.000	21.25	21.50	1.059	0.218	/
Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 41 (BW: 20MHz)	1RB	Left Cheek	40590	2590.0	2.310	0.187	100.00	1.000	22.76	23.00	1.057	0.198	/
		Left Tilt	40590	2590.0	3.880	0.179	100.00	1.000	22.76	23.00	1.057	0.189	/
		Right Cheek	40590	2590.0	-1.090	0.202	100.00	1.000	22.76	23.00	1.057	0.214	29#
		Right Tilt	40590	2590.0	-0.230	0.193	100.00	1.000	22.76	23.00	1.057	0.204	/
	50%RB	Left Cheek	40590	2590.0	-4.820	0.174	100.00	1.000	21.32	21.50	1.042	0.181	/
		Left Tilt	40590	2590.0	1.980	0.169	100.00	1.000	21.32	21.50	1.042	0.176	/
		Right Cheek	40590	2590.0	2.630	0.190	100.00	1.000	21.32	21.50	1.042	0.198	/
		Right Tilt	40590	2590.0	3.490	0.182	100.00	1.000	21.32	21.50	1.042	0.190	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 41 (BW: 20MHz)	1RB	Front	40590	2590.0	3.610	0.179	100.00	1.000	22.76	23.00	1.057	0.189	/
		Back	40590	2590.0	-2.730	0.262	100.00	1.000	22.76	23.00	1.057	0.277	30#
		Left	40590	2590.0	0.930	0.207	100.00	1.000	22.76	23.00	1.057	0.219	/
		Top	40590	2590.0	1.230	0.235	100.00	1.000	22.76	23.00	1.057	0.248	/
	50%RB	Front	40590	2590.0	4.510	0.161	100.00	1.000	21.32	21.50	1.042	0.168	/
		Back	40590	2590.0	-3.600	0.241	100.00	1.000	21.32	21.50	1.042	0.251	/

		Left	40590	2590.0	-2.080	0.184	100.00	1.000	21.32	21.50	1.042	0.192	/
		Top	40590	2590.0	3.830	0.219	100.00	1.000	21.32	21.50	1.042	0.228	/
Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 66 (BW: 20MHz)	1RB	Left Cheek	132322	1745.0	2.310	0.131	100.00	1.000	23.22	23.50	1.067	0.140	/
		Left Tilt	132322	1745.0	4.560	0.122	100.00	1.000	23.22	23.50	1.067	0.130	/
		Right Cheek	132322	1745.0	-3.810	0.142	100.00	1.000	23.22	23.50	1.067	0.152	31#
		Right Tilt	132322	1745.0	-0.420	0.128	100.00	1.000	23.22	23.50	1.067	0.137	/
	50%RB	Left Cheek	132322	1745.0	3.790	0.125	100.00	1.000	22.06	22.50	1.107	0.138	/
		Left Tilt	132322	1745.0	-2.990	0.110	100.00	1.000	22.06	22.50	1.107	0.122	/
		Right Cheek	132322	1745.0	1.030	0.133	100.00	1.000	22.06	22.50	1.107	0.147	/
		Right Tilt	132322	1745.0	-1.340	0.119	100.00	1.000	22.06	22.50	1.107	0.132	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 66 (BW: 20MHz)	1RB	Front	132322	1745.0	2.150	0.188	100.00	1.000	23.22	23.50	1.067	0.201	/
		Back	132322	1745.0	-4.650	0.397	100.00	1.000	23.22	23.50	1.067	0.424	32#
		Left	132322	1745.0	-0.420	0.265	100.00	1.000	23.22	23.50	1.067	0.283	/
		Top	132322	1745.0	1.890	0.308	100.00	1.000	23.22	23.50	1.067	0.329	/
	50%RB	Front	132322	1745.0	2.370	0.161	100.00	1.000	22.06	22.50	1.107	0.178	/
		Back	132322	1745.0	-3.720	0.362	100.00	1.000	22.06	22.50	1.107	0.401	/
		Left	132322	1745.0	-1.950	0.231	100.00	1.000	22.06	22.50	1.107	0.256	/
		Top	132322	1745.0	0.680	0.279	100.00	1.000	22.06	22.50	1.107	0.309	/

Head(0mm gap)													
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
2.4g (2.4~2.4835) 802.11n(HT20) MIMO ANT1 side	Left Cheek	7	2442	1.270	0.282	100.00	1.000	14.44	14.50	1.014	0.286	/	
	Left Tilt	7	2442	2.560	0.231	100.00	1.000	14.44	14.50	1.014	0.234	/	
	Right Cheek	7	2442	-4.540	0.293	100.00	1.000	14.44	14.50	1.014	0.297	33#	
	Right Tilt	7	2442	-3.410	0.264	100.00	1.000	14.44	14.50	1.014	0.268	/	
Body(hotspot open, 10mm Gap)													
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
2.4g (2.4~2.4835) 802.11n(HT20) MIMO ANT1 side	Front	7	2442	2.360	0.079	100.00	1.000	14.44	14.50	1.014	0.080	/	
	Back	7	2442	4.730	0.124	100.00	1.000	14.44	14.50	1.014	0.126	34#	
	Right	7	2442	-3.680	0.092	100.00	1.000	14.44	14.50	1.014	0.093	/	
	Top	7	2442	1.490	0.106	100.00	1.000	14.44	14.50	1.014	0.107	/	
Head(0mm gap)													
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
2.4g (2.4~2.4835) 802.11n(HT20) MIMO ANT2 side	Left Cheek	7	2442	2.330	0.270	100.00	1.000	14.44	14.50	1.014	0.274	/	
	Left Tilt	7	2442	-1.580	0.219	100.00	1.000	14.44	14.50	1.014	0.222	/	
	Right Cheek	7	2442	4.160	0.281	100.00	1.000	14.44	14.50	1.014	0.285	/	
	Right Tilt	7	2442	-0.320	0.252	100.00	1.000	14.44	14.50	1.014	0.256	/	
Body(hotspot open, 10mm Gap)													
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
2.4g (2.4~2.4835) 802.11n(HT20) MIMO ANT2 side	Front	7	2442	4.210	0.068	100.00	1.000	14.44	14.50	1.014	0.069	/	
	Back	7	2442	-0.600	0.112	100.00	1.000	14.44	14.50	1.014	0.114	/	
	Right	7	2442	3.970	0.080	100.00	1.000	14.44	14.50	1.014	0.081	/	
	Top	7	2442	4.050	0.092	100.00	1.000	14.44	14.50	1.014	0.093	/	

Head(0mm gap)													
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
U-NII-1 (5.150~5.250) 802.11ac(VHT40) MIMO ANT1 side	Left Cheek	46	5230	2.370	0.312	100.00	1.000	16.36	16.50	1.033	0.322	/	
	Left Tilt	46	5230	-1.520	0.268	100.00	1.000	16.36	16.50	1.033	0.277	/	
	Right Cheek	46	5230	-4.300	0.344	100.00	1.000	16.36	16.50	1.033	0.355	35#	
	Right Tilt	46	5230	3.020	0.287	100.00	1.000	16.36	16.50	1.033	0.296	/	
Body(hotspot open, 10mm Gap)													
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
U-NII-1	Front	46	5230	-1.850	0.201	100.00	1.000	16.36	16.50	1.033	0.208	/	

(5.150-5.250) 802.11ac(VHT40) MIMO ANT1 side	Back	46	5230	4.970	0.298	100.00	1.000	16.36	16.50	1.033	0.308	36#
	Right	46	5230	2.460	0.235	100.00	1.000	16.36	16.50	1.033	0.243	/
	Top	46	5230	3.230	0.278	100.00	1.000	16.36	16.50	1.033	0.287	/
Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-1 (5.150-5.250) 802.11ac(VHT40) MIMO ANT2 side	Left Cheek	46	5230	1.950	0.301	100.00	1.000	16.36	16.50	1.033	0.311	/
	Left Tilt	46	5230	-0.310	0.236	100.00	1.000	16.36	16.50	1.033	0.244	/
	Right Cheek	46	5230	3.740	0.324	100.00	1.000	16.36	16.50	1.033	0.335	/
	Right Tilt	46	5230	0.690	0.259	100.00	1.000	16.36	16.50	1.033	0.268	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-1 (5.150-5.250) 802.11ac(VHT40) MIMO ANT2 side	Front	46	5230	2.310	0.156	100.00	1.000	16.36	16.50	1.033	0.161	/
	Back	46	5230	-0.480	0.205	100.00	1.000	16.36	16.50	1.033	0.212	/
	Right	46	5230	3.620	0.181	100.00	1.000	16.36	16.50	1.033	0.187	/
	Top	46	5230	-4.810	0.198	100.00	1.000	16.36	16.50	1.033	0.205	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2a (5.250-5.350) 802.11ac(VHT80) MIMO ANT1 side	Left Cheek	58	5290	3.220	0.249	100.00	1.000	16.94	17.00	1.014	0.252	/
	Left Tilt	58	5290	4.410	0.202	100.00	1.000	16.94	17.00	1.014	0.205	/
	Right Cheek	58	5290	-2.930	0.260	100.00	1.000	16.94	17.00	1.014	0.264	37#
	Right Tilt	58	5290	1.720	0.234	100.00	1.000	16.94	17.00	1.014	0.237	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2a (5.250-5.350) 802.11ac(VHT80) MIMO ANT1 side	Front	58	5290	3.240	0.225	100.00	1.000	16.94	17.00	1.014	0.228	/
	Back	58	5290	1.640	0.335	100.00	1.000	16.94	17.00	1.014	0.340	38#
	Right	58	5290	-1.450	0.263	100.00	1.000	16.94	17.00	1.014	0.267	/
	Top	58	5290	-0.260	0.302	100.00	1.000	16.94	17.00	1.014	0.306	/
Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2a (5.250-5.350) 802.11ac(VHT80) MIMO ANT2 side	Left Cheek	58	5290	1.530	0.239	100.00	1.000	16.94	17.00	1.014	0.242	/
	Left Tilt	58	5290	-2.970	0.182	100.00	1.000	16.94	17.00	1.014	0.185	/
	Right Cheek	58	5290	2.150	0.248	100.00	1.000	16.94	17.00	1.014	0.251	/
	Right Tilt	58	5290	3.270	0.225	100.00	1.000	16.94	17.00	1.014	0.228	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2a (5.250-5.350) 802.11ac(VHT80) MIMO ANT2 side	Front	58	5290	0.960	0.116	100.00	1.000	16.94	17.00	1.014	0.118	/
	Back	58	5290	-3.450	0.183	100.00	1.000	16.94	17.00	1.014	0.186	/
	Right	58	5290	2.180	0.149	100.00	1.000	16.94	17.00	1.014	0.151	/
	Top	58	5290	3.670	0.161	100.00	1.000	16.94	17.00	1.014	0.163	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2c (5.470-5.725) 802.11ac(VHT80) MIMO ANT1 side	Left Cheek	106	5530	2.420	0.243	100.00	1.000	16.41	16.50	1.021	0.248	/
	Left Tilt	106	5530	-1.850	0.219	100.00	1.000	16.41	16.50	1.021	0.224	/
	Right Cheek	106	5530	-2.340	0.265	100.00	1.000	16.41	16.50	1.021	0.271	39#
	Right Tilt	106	5530	0.710	0.230	100.00	1.000	16.41	16.50	1.021	0.235	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2c (5.470-5.725) 802.11ac(VHT80) MIMO ANT1 side	Front	106	5530	-3.270	0.201	100.00	1.000	16.41	16.50	1.021	0.205	/
	Back	106	5530	1.220	0.302	100.00	1.000	16.41	16.50	1.021	0.308	40#
	Right	106	5530	1.960	0.243	100.00	1.000	16.41	16.50	1.021	0.248	/
	Top	106	5530	0.450	0.275	100.00	1.000	16.41	16.50	1.021	0.281	/
Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2c (5.470-5.725) 802.11ac(VHT80)	Left Cheek	106	5530	3.250	0.224	100.00	1.000	16.41	16.50	1.021	0.229	/
	Left Tilt	106	5530	-2.870	0.190	100.00	1.000	16.41	16.50	1.021	0.194	/

MIMO ANT2 side	Right Cheek	106	5530	4.120	0.246	100.00	1.000	16.41	16.50	1.021	0.251	/
	Right Tilt	106	5530	0.890	0.208	100.00	1.000	16.41	16.50	1.021	0.212	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-2c (5.470-5.725) 802.11ac(VHT80) MIMO ANT2 side	Front	106	5530	-1.630	0.128	100.00	1.000	16.41	16.50	1.021	0.131	/
	Back	106	5530	-3.420	0.193	100.00	1.000	16.41	16.50	1.021	0.197	/
	Right	106	5530	2.970	0.151	100.00	1.000	16.41	16.50	1.021	0.154	/
	Top	106	5530	1.660	0.172	100.00	1.000	16.41	16.50	1.021	0.176	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-3 (5.725-5.850) 802.11ac(VHT40) MIMO ANT1 side	Left Cheek	159	5795	-3.510	0.587	100.00	1.000	14.27	14.50	1.054	0.619	/
	Left Tilt	159	5795	2.440	0.498	100.00	1.000	14.27	14.50	1.054	0.525	/
	Right Cheek	159	5795	4.460	0.752	100.00	1.000	14.27	14.50	1.054	0.793	41#
	Right Tilt	159	5795	-0.070	0.531	100.00	1.000	14.27	14.50	1.054	0.560	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-3 (5.725-5.850) 802.11ac(VHT40) MIMO ANT1 side	Front	159	5795	-2.420	0.202	100.00	1.000	14.27	14.50	1.054	0.213	/
	Back	159	5795	-3.410	0.305	100.00	1.000	14.27	14.50	1.054	0.321	42#
	Right	159	5795	4.790	0.246	100.00	1.000	14.27	14.50	1.054	0.259	/
	Top	159	5795	0.370	0.274	100.00	1.000	14.27	14.50	1.054	0.289	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-3 (5.725-5.850) 802.11ac(VHT40) MIMO ANT2 side	Left Cheek	159	5795	1.630	0.425	100.00	1.000	14.27	14.50	1.054	0.448	/
	Left Tilt	159	5795	2.660	0.326	100.00	1.000	14.27	14.50	1.054	0.344	/
	Right Cheek	159	5795	-3.740	0.508	100.00	1.000	14.27	14.50	1.054	0.535	/
	Right Tilt	159	5795	-0.210	0.388	100.00	1.000	14.27	14.50	1.054	0.409	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-3 (5.725-5.850) 802.11ac(VHT40) MIMO ANT2 side	Front	159	5795	1.800	0.101	100.00	1.000	14.27	14.50	1.054	0.106	/
	Back	159	5795	3.240	0.196	100.00	1.000	14.27	14.50	1.054	0.207	/
	Right	159	5795	-0.080	0.147	100.00	1.000	14.27	14.50	1.054	0.155	/
	Top	159	5795	-3.520	0.164	100.00	1.000	14.27	14.50	1.054	0.173	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Bluetooth	Left Cheek	78	2480	2.660	0.071	100.00	1.000	12.00	12.00	1.000	0.071	/
	Left Tilt	78	2480	0.410	0.059	100.00	1.000	12.00	12.00	1.000	0.059	/
	Right Cheek	78	2480	2.130	0.079	100.00	1.000	12.00	12.00	1.000	0.079	43#
	Right Tilt	78	2480	-4.570	0.068	100.00	1.000	12.00	12.00	1.000	0.068	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Bluetooth	Front	78	2480	1.330	0.048	100.00	1.000	12.00	12.00	1.000	0.048	/
	Back	78	2480	0.530	0.075	100.00	1.000	12.00	12.00	1.000	0.075	44#
	Right	78	2480	-2.010	0.059	100.00	1.000	12.00	12.00	1.000	0.059	/
	Top	78	2480	2.400	0.067	100.00	1.000	12.00	12.00	1.000	0.067	/

Note:

- The maximum SAR Value of each test band is marked bold.
- SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Per KDB 447498 D04 v01, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
- Per KDB 447498 D04 v01, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
- Per KDB Publication 941225 D06 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- Per KDB 447498 D04 v01, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor=10^[(tune-up limit power(dBm) - Ave.power power (dBm))/10], where tune-up limit is the maximum rated power among all production units.
Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.

11. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is $1.022 > 0.80$ W/kg, repeated measurement is as below.

Mode	Position	Ch.	Freq. (MHz)	1g Meas SAR (W/kg)	he ratio of largest to smallest SAR for the original and first repeated measurements
LTE Band 2 (BW: 20MHz)	Back	19100	1900.0	1.022	1.025
	Back-repeated	19100	1900.0	0.997	
Band 25 (BW: 20MHz)	Back	26590	1905.0	0.881	1.014
	Back-repeated	26590	1905.0	0.869	

According to the above ratio result, we don't need to perform a second repeated measurement for these bands.

12. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

12.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 2 Tx antennas, WWAN main antenna supports GSM/WCDMA/LTE, Wifi/BT antenna supports 2.4G/5G Wi-Fi and BT. The 2 antennas can always transmit simultaneously. The work mode combination is showed as below table.

Application Simultaneous Transmission information:

NO.	Configuration	Head	Body-worn
1	WWAN+WIFI(2.4g)	Yes	Yes
2	WWAN+WIFI(5g)	Yes	Yes
3	WWAN+BT	Yes	Yes
4	WWAN+NFC	Yes	Yes

12.2 Sum SAR of Simultaneous Transmission

Head

Band	Test Position	RB allocation	Scaled					Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	Σ SAR (W/kg) WWAN + NFC	SPLSR	Remark
			WWAN	WIFI 2.4G	WIFI 5G	Bluetooth	NFC						
LTE Band 4 QPSK (20MHz)	Left Cheek	1RB	0.228	0.560	1.067	0.071	0.000	0.788	1.295	0.299	0.228	N/A	N/A
	Left Tilt		0.192	0.456	0.869	0.059	0.000	0.648	1.061	0.251	0.192	N/A	N/A
	Right Cheek		0.252	0.582	1.328	0.079	0.000	0.834	1.580	0.331	0.252	N/A	N/A
	Right Tilt		0.207	0.524	0.969	0.068	0.000	0.731	1.176	0.275	0.207	N/A	N/A
	Left Cheek	50%RB	0.211	0.560	1.067	0.071	0.000	0.771	1.278	0.282	0.211	N/A	N/A
	Left Tilt		0.174	0.456	0.869	0.059	0.000	0.630	1.043	0.233	0.174	N/A	N/A
	Right Cheek		0.235	0.582	1.328	0.079	0.000	0.817	1.563	0.314	0.235	N/A	N/A
	Right Tilt		0.189	0.524	0.969	0.068	0.000	0.713	1.158	0.257	0.189	N/A	N/A

Hotspot(body-worn)

Band	Test Position	RB allocation	Scaled					Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	Σ SAR (W/kg) WWAN + NFC	SPLSR	Remark
			WWAN	WIFI 2.4G	WIFI 5G	Bluetooth	NFC						
LTE Band 2 QPSK (20MHz)	Front	1RB	0.515	0.149	0.319	0.048	0.000	0.664	0.834	0.563	0.515	N/A	N/A
	Back		1.058	0.240	0.528	0.075	0.000	1.298	1.586	1.133	1.058	N/A	N/A
	Left		0.634	/	/	/	0.000	0.634	0.634	0.634	0.634	N/A	N/A
	Right		/	0.174	0.414	0.059	0.000	0.174	0.414	0.059	0.000	N/A	N/A
	Top	50%RB	0.885	0.200	0.462	0.067	0.000	1.085	1.347	0.952	0.885	N/A	N/A
	Front		0.349	0.149	0.319	0.048	0.000	0.498	0.668	0.397	0.349	N/A	N/A
	Back		1.048	0.240	0.528	0.075	0.000	1.288	1.576	1.123	1.048	N/A	N/A
	Left		0.527	/	/	/	0.000	0.527	0.527	0.527	0.527	N/A	N/A
	Right		/	0.174	0.414	0.059	0.000	0.174	0.414	0.059	0.000	N/A	N/A
	Top		0.771	0.200	0.462	0.067	0.000	0.971	1.233	0.838	0.771	N/A	N/A

13. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	04/22 EPG0365	2024/02/06	2025/02/05
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2023/11/16	2024/11/15
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2023/11/16	2024/11/15
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2023/11/16	2024/11/15
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2024/03/20	2025/03/19
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2024/03/20	2025/03/19
10dB Attenuator	MIDWEST MICROWAVE	263-10dB	/	2024/03/20	2025/03/19
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	2024/03/20	2025/03/19
835MHz Validation Dipole	MVG	SID835	07/22 DIP 0G835-656	2023/02/06	2025/02/05
1800MHz Validation Dipole	MVG	SID1800	07/22 DIP 1G800-657	2023/02/06	2025/02/05
1900MHz Validation Dipole	MVG	SID1900	07/22 DIP 1G900-658	2023/02/06	2025/02/05
2450MHz Validation Dipole	MVG	SID2450	07/22 DIP 2G450-662	2023/02/06	2025/02/05
2600MHz Validation Dipole	MVG	SID2600	07/22 DIP 2G600-663	2023/02/06	2025/02/05
5200MHz-5800MHz Validation Dipole	MVG	SID5000	07/22 DIP5G000-670	2023/02/06	2025/02/05
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	2024/02/02	2025/02/01
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2023/11/16	2024/11/15
Thermometer	Riters	DT-232	21A11	2024/03/20	2025/03/19
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	/	/
SAM Phantom	MVG	SAM	07/22 SAM149	/	/
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	/	/
Mechanical Calibration Kit	PNA	/	/	2023/11/16	2024/11/15
Open SAR test software	MVG	/	V5.3.5	/	/

Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
835	41.50	41.41	0.90	0.87	0.22%	3.33%	±5%	20.0	16/7/2024
1800	40.00	39.91	1.40	1.37	0.23%	2.14%	±5%	20.0	18/7/2024
1900	40.00	39.88	1.40	1.41	0.30%	-0.71%	±5%	20.0	22/7/2024
2450	39.20	39.08	1.80	1.81	0.31%	-0.56%	±5%	20.0	24/7/2024
2600	39.00	38.88	1.96	1.97	0.31%	-0.51%	±5%	20.0	26/7/2024
5200	36.00	35.88	4.66	4.70	-0.33%	0.86%	±5%	20.0	30/7/2024
5400	35.80	35.68	4.86	4.90	-0.34%	0.82%	±5%	20.0	1/8/2024
5600	35.50	35.38	5.07	5.11	-0.34%	0.79%	±5%	20.0	5/8/2024
5800	35.30	35.18	5.27	5.31	0.34%	-0.76%	±5%	20.0	6/8/2024

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

Frequency (MHz)	Input Power (mW)	10g SAR (W/Kg)	1g SAR (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Standard target (1W) (W/Kg)	1g SAR Deviation	10g SAR Deviation
835	16	0.106	0.163	6.63	10.19	6.17	9.79	7.37%	4.06%
1800	16	0.312	0.588	19.50	36.75	20.61	39.33	-5.39%	-6.56%
1900	16	0.322	0.630	20.13	39.38	20.70	40.97	-2.78%	-3.89%
2450	16	0.352	0.793	22.00	49.56	23.86	54.4	-7.80%	-8.89%
2600	16	0.421	0.866	26.31	54.13	24.48	57.14	7.49%	-5.28%
5200	13	0.288	1.019	22.15	78.38	21.29	73.88	4.06%	6.10%
5400	13	0.299	1.051	23.00	80.85	23.23	81.47	-0.99%	-0.77%
5600	13	0.304	1.084	23.38	83.38	22.64	78.71	3.29%	5.94%
5800	13	0.277	0.981	21.31	75.46	21.5	74.21	-0.89%	1.69%


ANNEX C SAR Dipole Calibrations

Justification for Extended SAR Dipole Calibrations


Referring to KDB 865664D01V01r04, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration) and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended. While calibration intervals not exceed 3 years.

Frequency (MHz)	Return loss(dB)		Impedance(Ω)				error range (%)		Results (P/F)	Date of Measurement
	measurement	target	measurement		target		Return loss($\pm 20\%$)	Impedance($\pm 5 \Omega$)		
			real part	imaginary part	real part	imaginary part				
CW835	-29.88	-26.27	52.8	-1.7	52.5	-4.2	13.74%	2.8	P	2/5/2024
CW1800	-24.55	-26.54	52.4	-0.2	52.8	+3.8	-7.50%	4.4	P	2/5/2024
CW1900	-25.67	-23.01	51.9	-5.3	51.0	-7.0	11.56%	2.6	P	2/5/2024
CW2450	-24.37	-21.23	48.3	5.7	49.4	+8.6	14.79%	4.0	P	2/5/2024
CW2600	-20.56	-23.05	57.3	5.7	54.3	+5.5	-10.80%	3.2	P	2/5/2024
CW5200	-21.14	-20.29	58.4	-4.5	58.76	-4.43	4.19%	0.43	P	2/5/2024
CW5400	-27.63	-29.09	57.5	1.2	53.46	+0.61	-5.02%	4.63	P	2/5/2024
CW5600	-33.45	-31.06	51.7	0.7	52.76	-0.45	7.69%	2.21	P	2/5/2024
CW5800	-28.88	-28.48	50.8	0.1	50.12	-3.76	1.40%	4.34	P	2/5/2024


Dipole calibration report data	Self-examination data								
835MHz Dipole									
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Return Loss (dB)</th> <th>Requirement (dB)</th> <th>Impedance</th> </tr> </thead> <tbody> <tr> <td>835</td> <td>-26.27</td> <td>-20</td> <td>52.5 Ω - 4.2 jΩ</td> </tr> </tbody> </table>	Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance	835	-26.27	-20	52.5 Ω - 4.2 j Ω	
Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance						
835	-26.27	-20	52.5 Ω - 4.2 j Ω						
1800MHz Dipole									
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Return Loss (dB)</th> <th>Requirement (dB)</th> <th>Impedance</th> </tr> </thead> <tbody> <tr> <td>1800</td> <td>-26.54</td> <td>-20</td> <td>52.8 Ω + 3.8 jΩ</td> </tr> </tbody> </table>	Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance	1800	-26.54	-20	52.8 Ω + 3.8 j Ω	
Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance						
1800	-26.54	-20	52.8 Ω + 3.8 j Ω						
1900MHz Dipole									

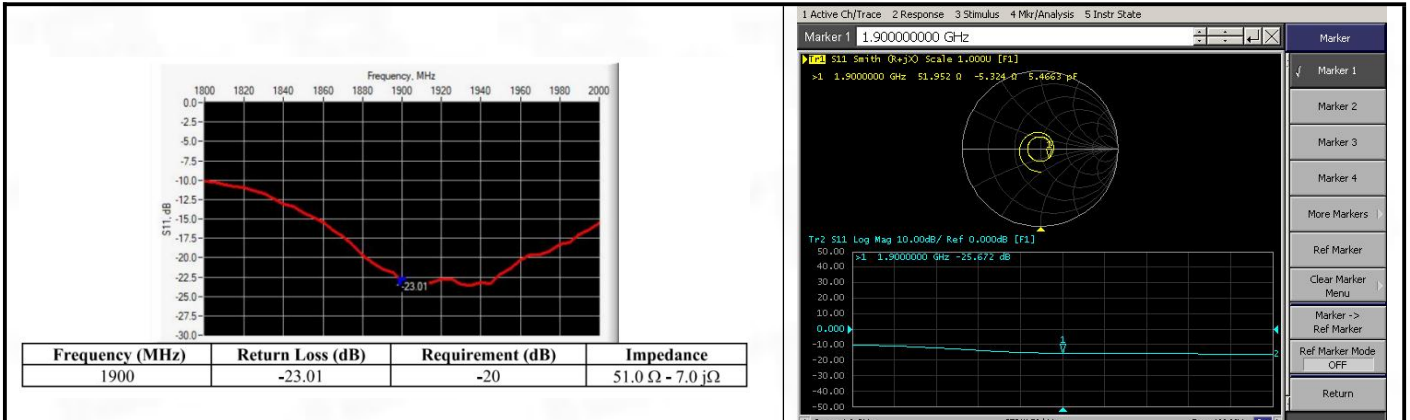


2450MHz Dipole

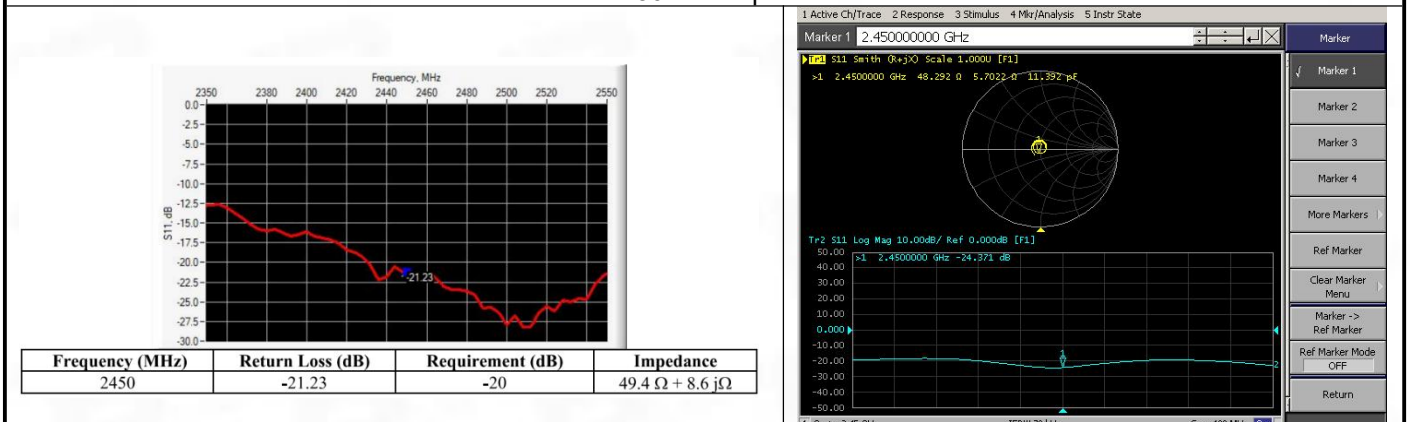





2600MHz Dipole

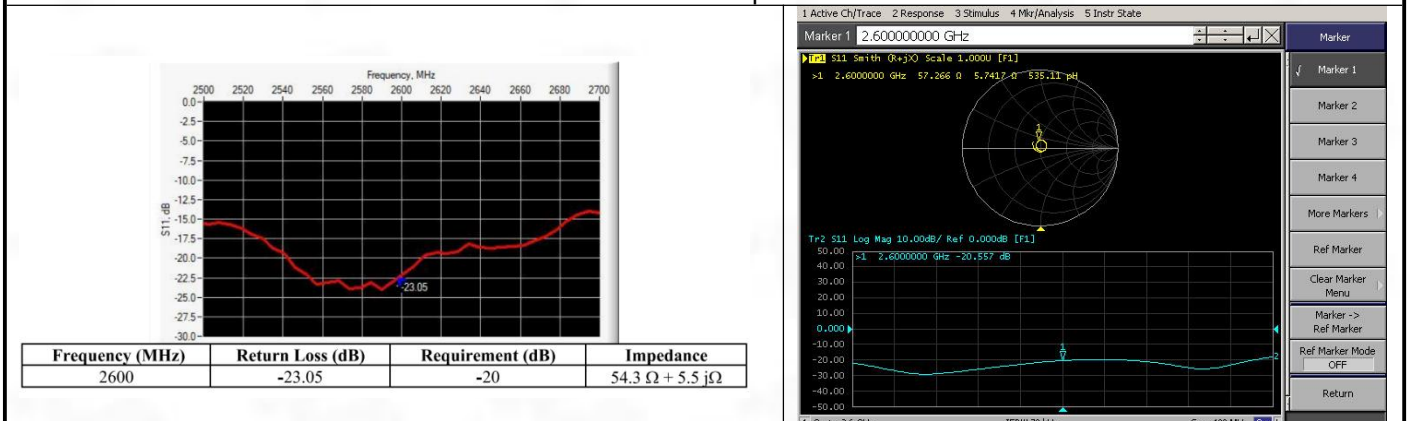

5000MHz Dipole

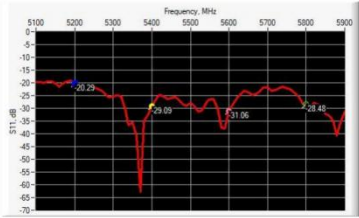

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
5200	-20.29	-20	58.76 Ω - 4.43 jΩ
5400	-29.09	-20	53.46 Ω + 0.61 jΩ
5600	-31.06	-20	52.76 Ω - 0.45 jΩ
5800	-28.48	-20	50.12 Ω - 3.76 jΩ

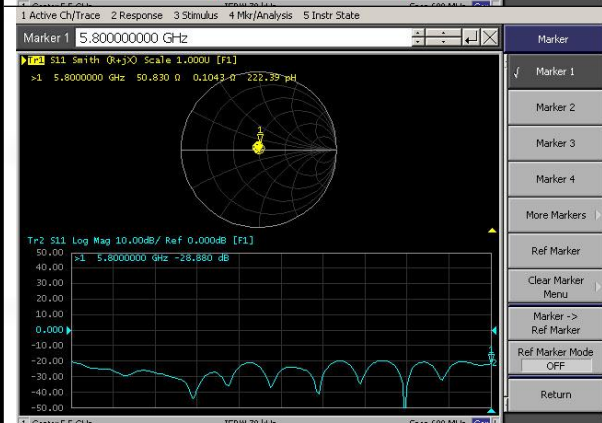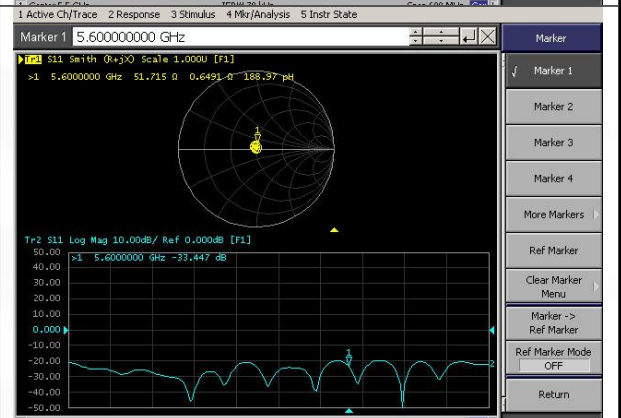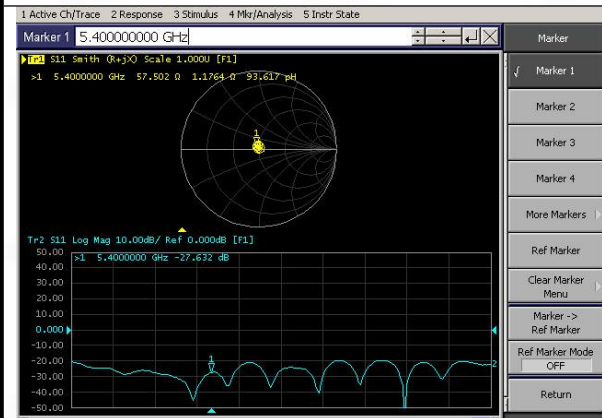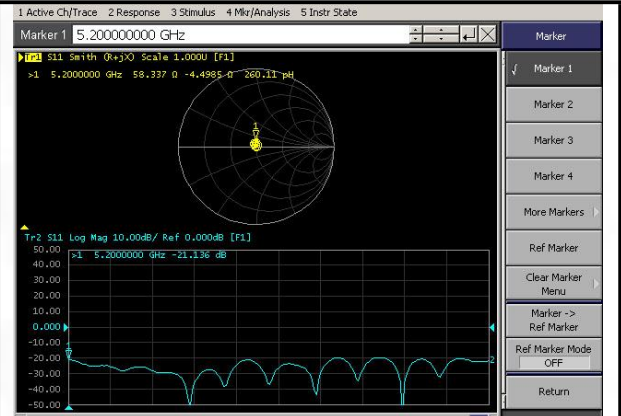

System Performance Check Data (835 MHz)

System check at 835 MHz

Date of measurement: 16/7/2024


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	835.000
Relative permittivity (real part)	41.410
Relative permittivity (imaginary part)	19.490
Conductivity (S/m)	0.870

C. SAR Surface and Volume

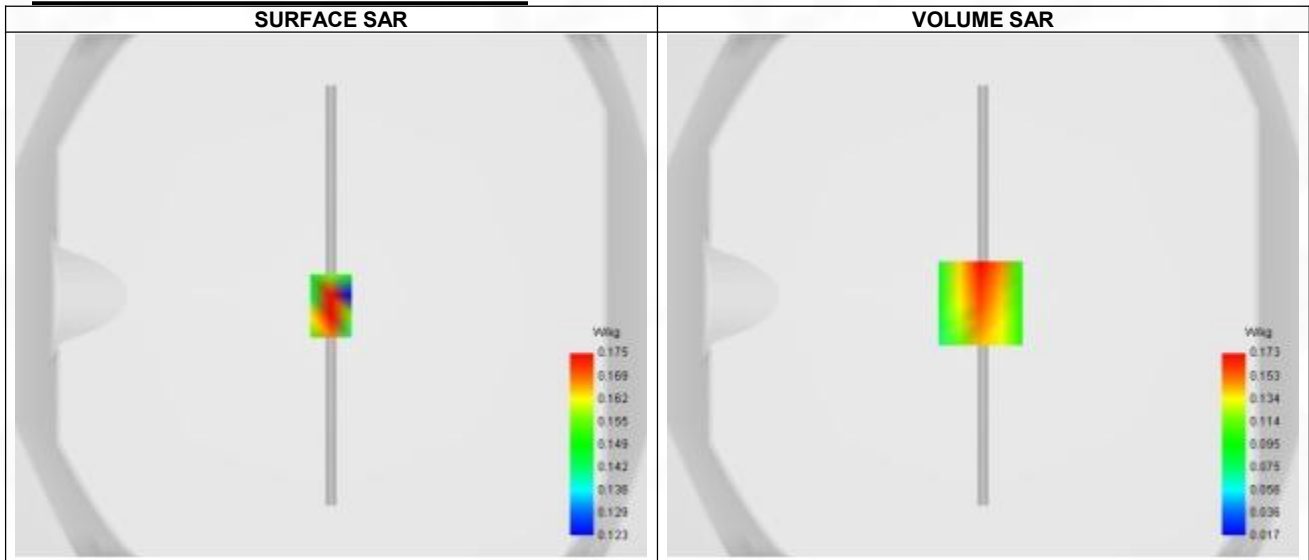


Maximum location: X=-1.00, Y=-3.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.163
Variation (%)	-3.390
Horizontal validation criteria: minimum distance (mm)	8.487
Vertical validation criteria: SAR ratio M2/M1 (%)	66.47%

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.059	0.173	0.115	0.061	0.072

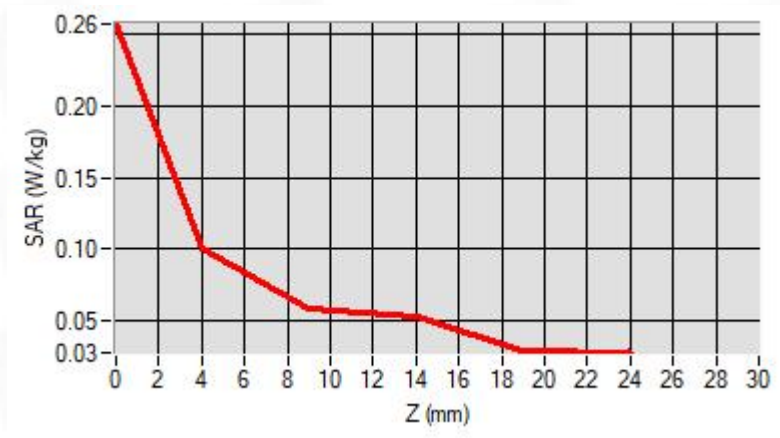

F. 3D Image

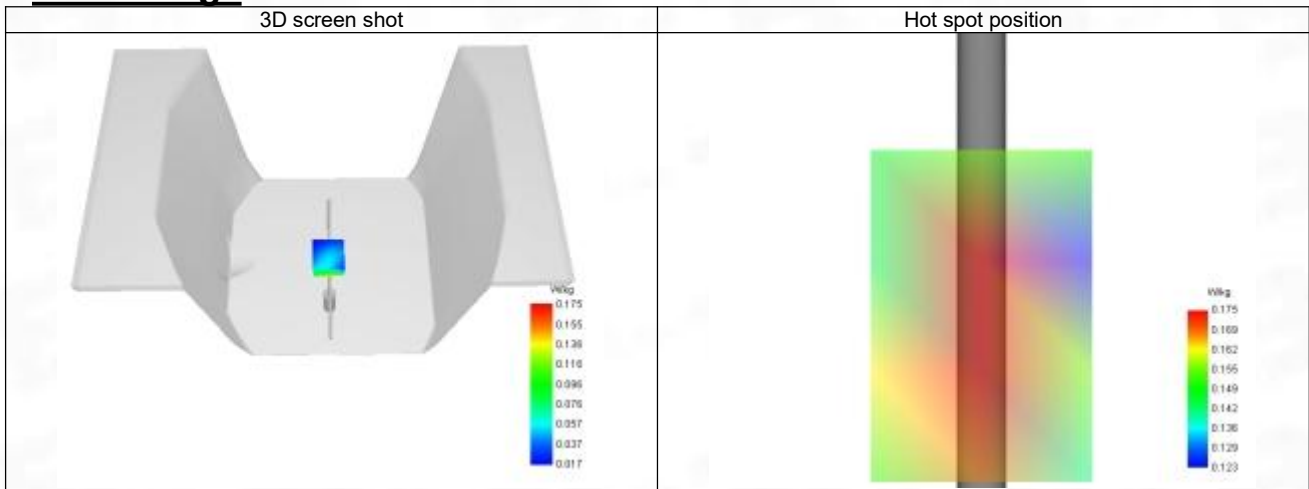

System Performance Check Data (1800 MHz)

System check at 1800 MHz

Date of measurement: 18/7/2024


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1800.000
Relative permittivity (real part)	39.910
Relative permittivity (imaginary part)	14.090
Conductivity (S/m)	1.370

C. SAR Surface and Volume

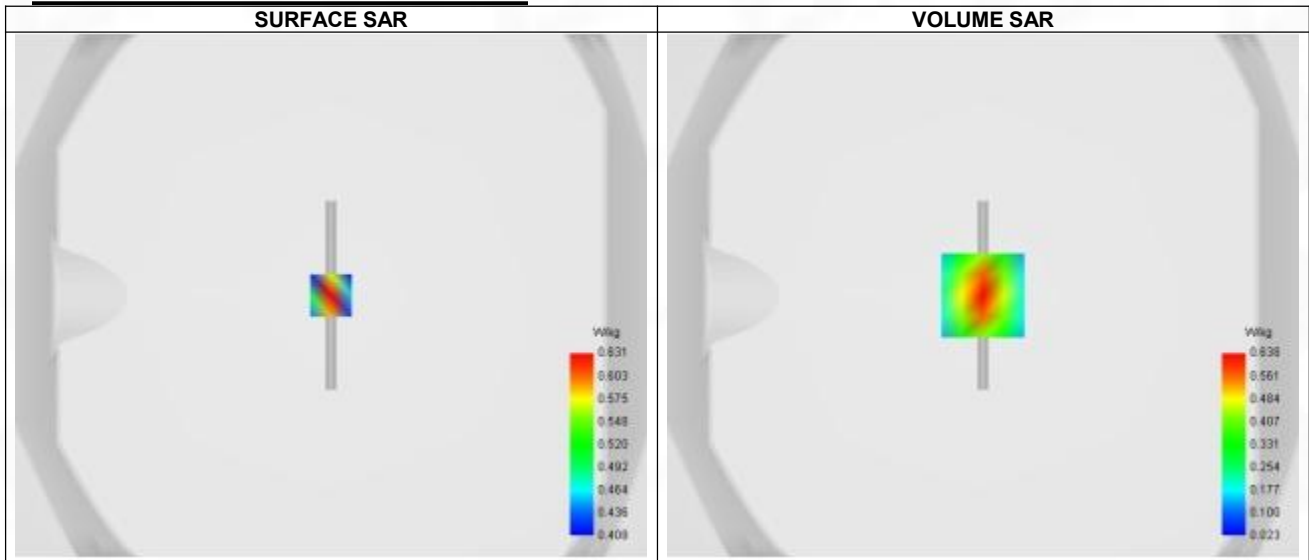


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.588
Variation (%)	-0.250
Horizontal validation criteria: minimum distance (mm)	8.698
Vertical validation criteria: SAR ratio M2/M1 (%)	55.80%

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.003	0.638	0.356	0.204	0.127

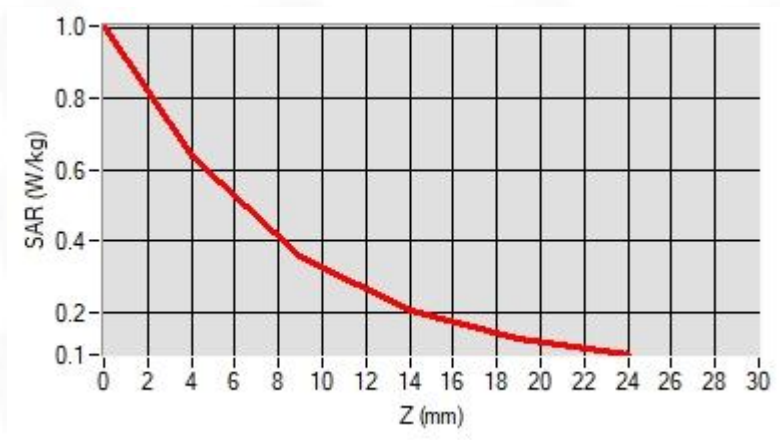

F. 3D Image

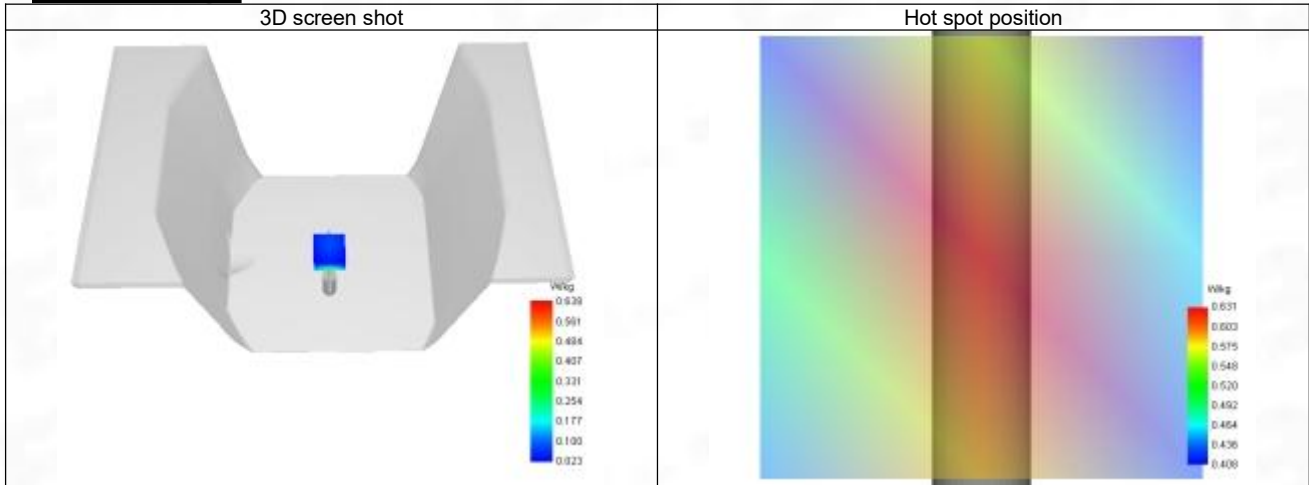

System Performance Check Data (1900 MHz)

System check at 1900 MHz

Date of measurement: 22/7/2024


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.880
Relative permittivity (imaginary part)	13.380
Conductivity (S/m)	1.410

C. SAR Surface and Volume

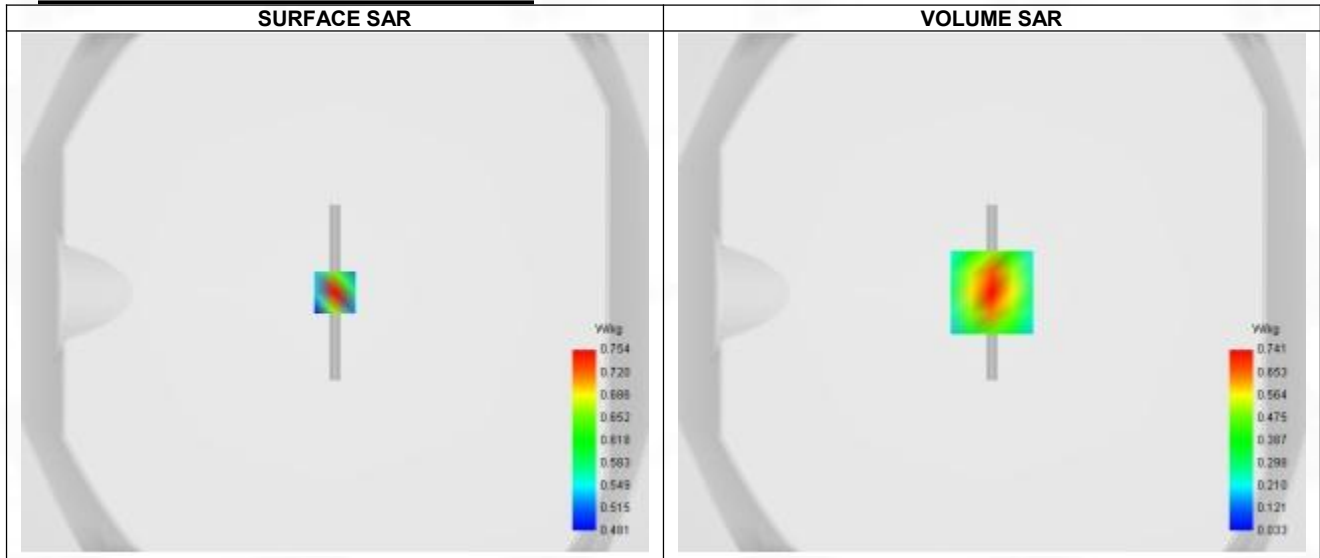


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.18 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.630
Variation (%)	-2.080
Horizontal validation criteria: minimum distance (mm)	8.699
Vertical validation criteria: SAR ratio M2/M1 (%)	52.96%

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.201	0.759	0.402	0.239	0.156

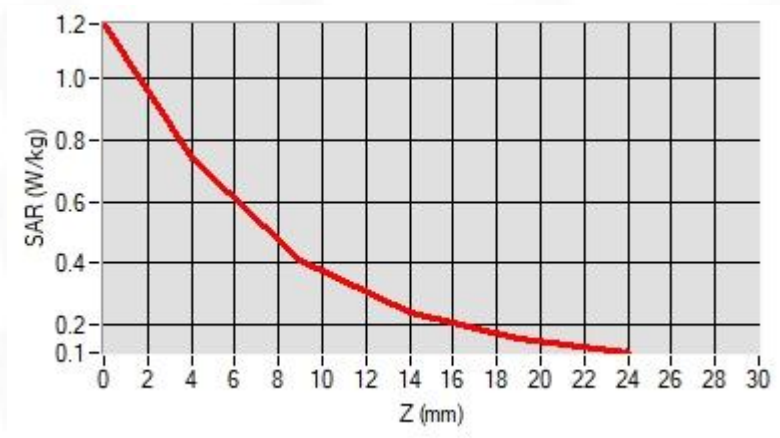

F. 3D Image

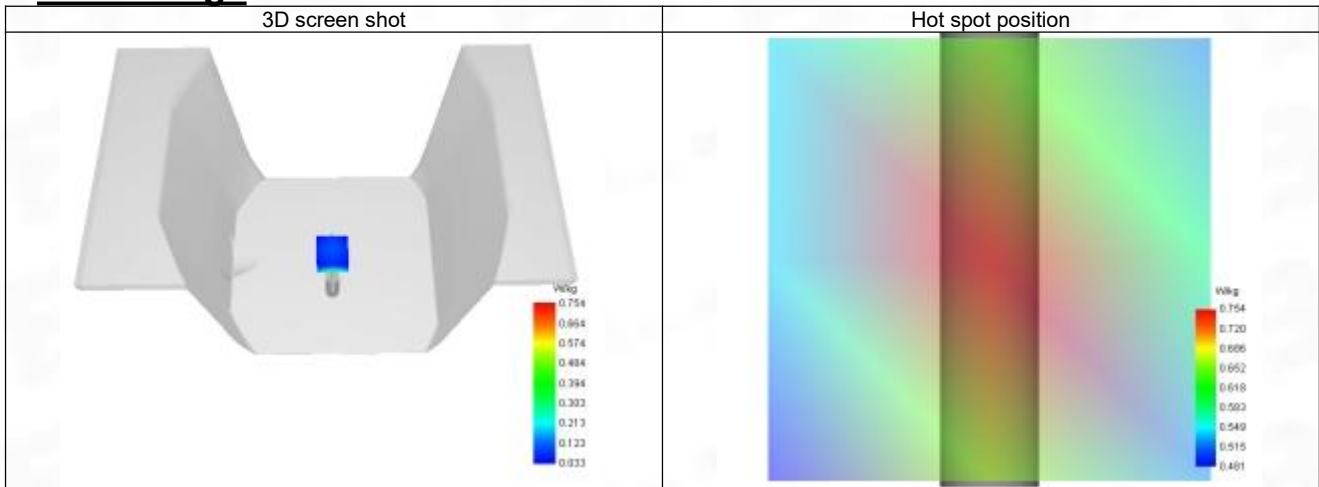

System Performance Check Data (2450 MHz)

System check at 2450 MHz

Date of measurement: 24/7/2024


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=5mm dy=5mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	39.080
Relative permittivity (imaginary part)	13.340
Conductivity (S/m)	1.810

C. SAR Surface and Volume

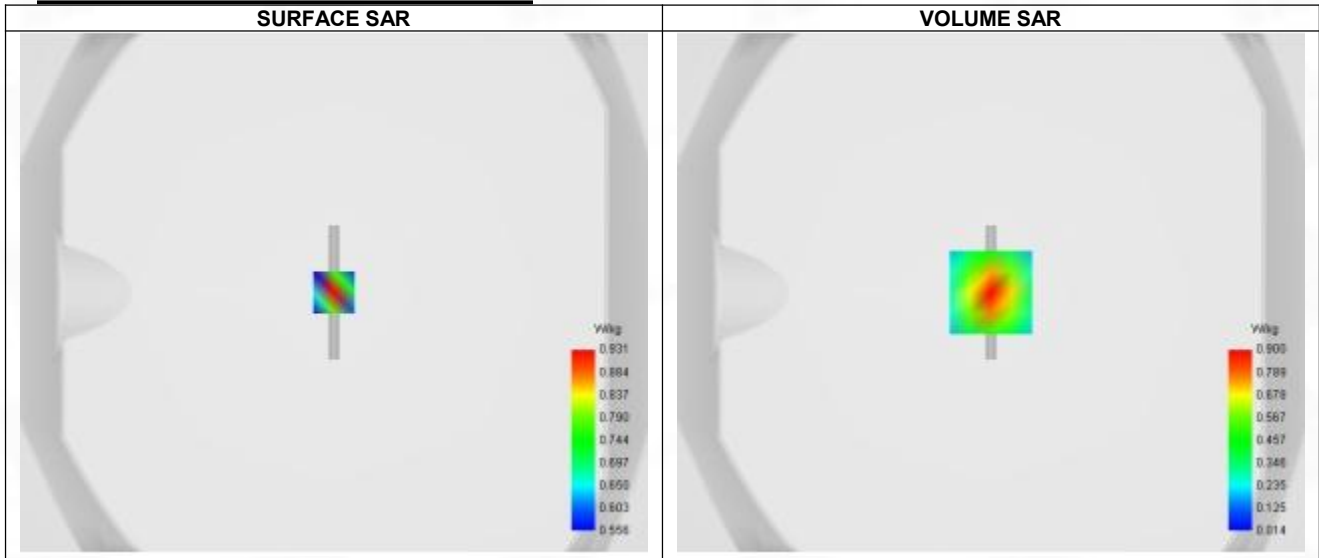


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.47 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.352
SAR 1g (W/Kg)	0.793
Variation (%)	-2.570
Horizontal validation criteria: minimum distance (mm)	9.787
Vertical validation criteria: SAR ratio M2/M1 (%)	53.00%

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.466	0.900	0.477	0.261	0.158

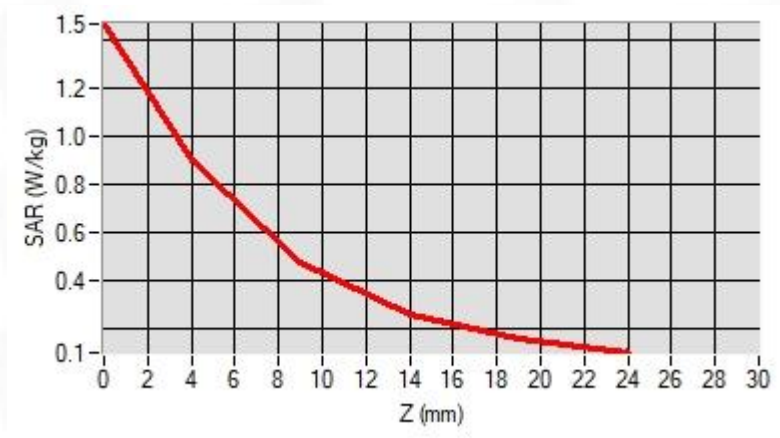

F. 3D Image

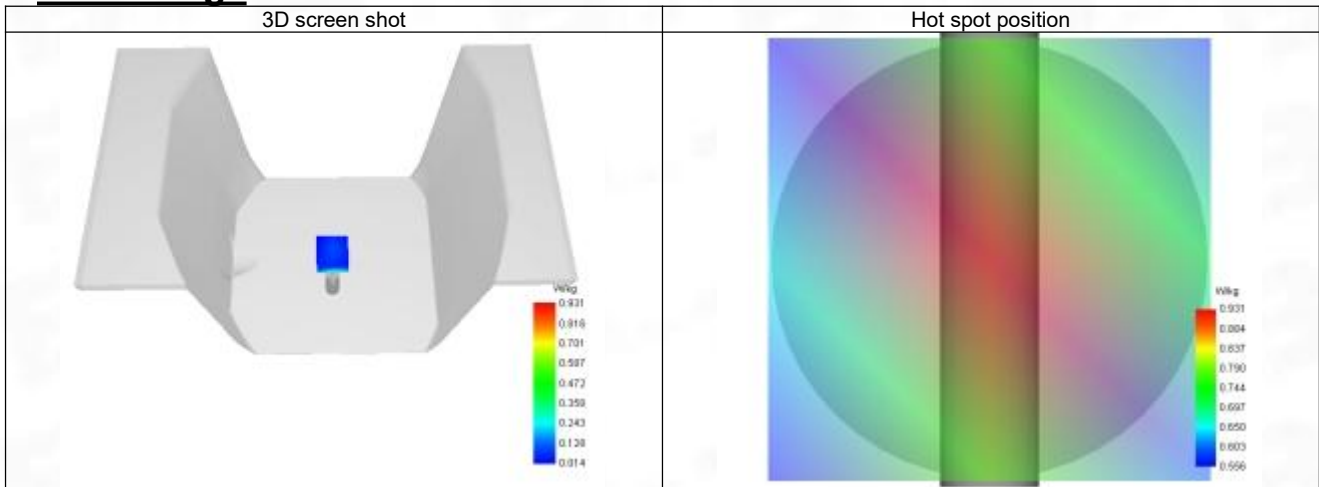

System Performance Check Data (2600 MHz)

System check at 2600 MHz

Date of measurement: 26/7/2024


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=5mm dy=5mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2600.000
Relative permittivity (real part)	38.880
Relative permittivity (imaginary part)	12.690
Conductivity (S/m)	1.970

C. SAR Surface and Volume

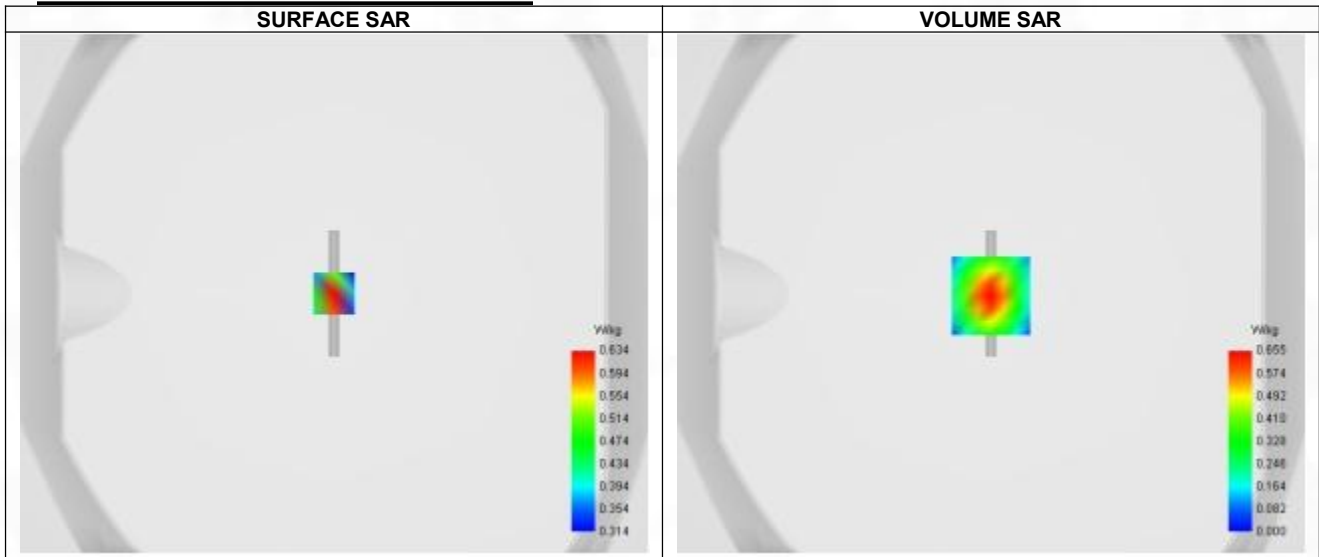


Maximum location: X=0.00, Y=-1.00 ; SAR Peak: 1.02 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.421
SAR 1g (W/Kg)	0.866
Variation (%)	2.980
Horizontal validation criteria: minimum distance (mm)	9.362
Vertical validation criteria: SAR ratio M2/M1 (%)	54.81%

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.020	0.655	0.359	0.187	0.091

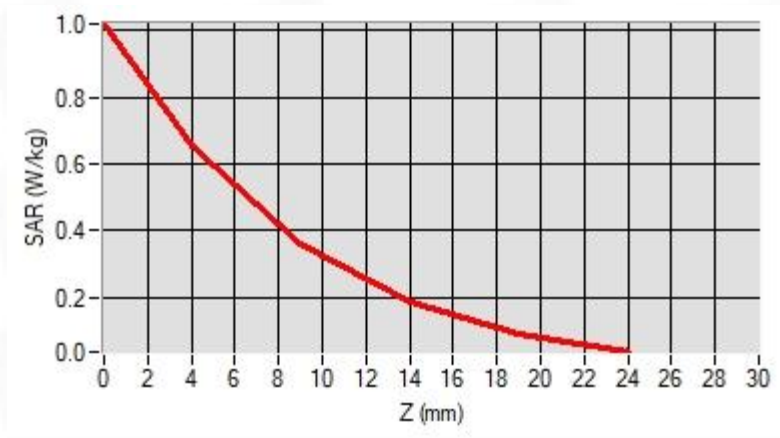

F. 3D Image

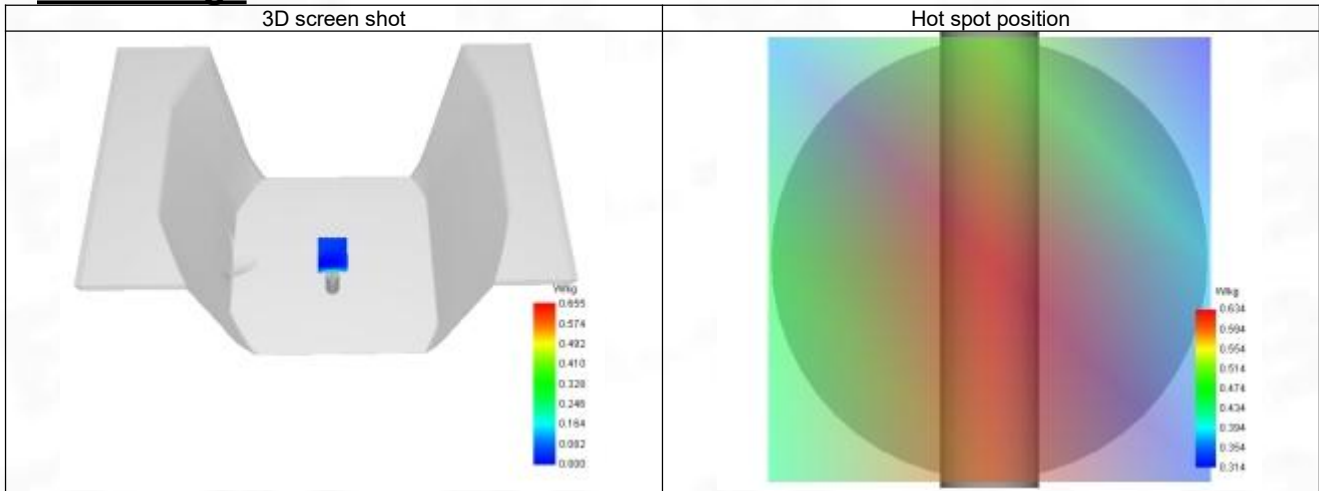

System Performance Check Data (5200 MHz)

System check at 5200 MHz

Date of measurement: 30/7/2024


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=2mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5200.000
Relative permittivity (real part)	35.880
Relative permittivity (imaginary part)	16.250
Conductivity (S/m)	4.700

C. SAR Surface and Volume

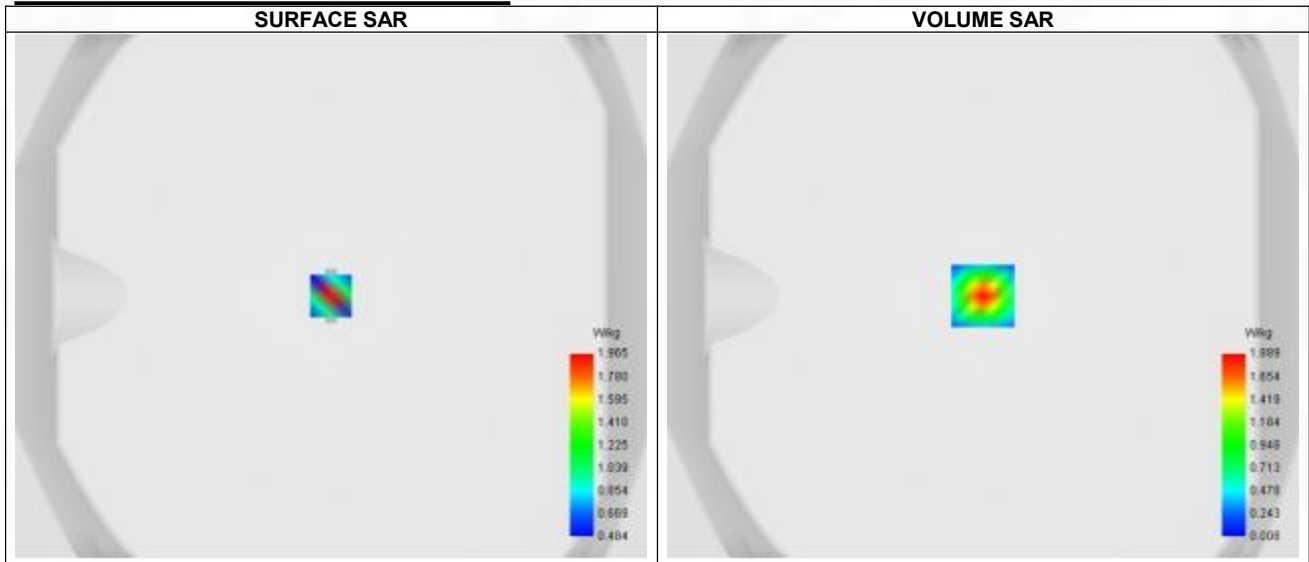


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.38 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.288
SAR 1g (W/Kg)	1.019
Variation (%)	-3.400
Horizontal validation criteria: minimum distance (mm)	6.287
Vertical validation criteria: SAR ratio M2/M1 (%)	54.05%

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.268	1.889	1.021	0.523	0.266	0.142	0.085	0.060	0.052

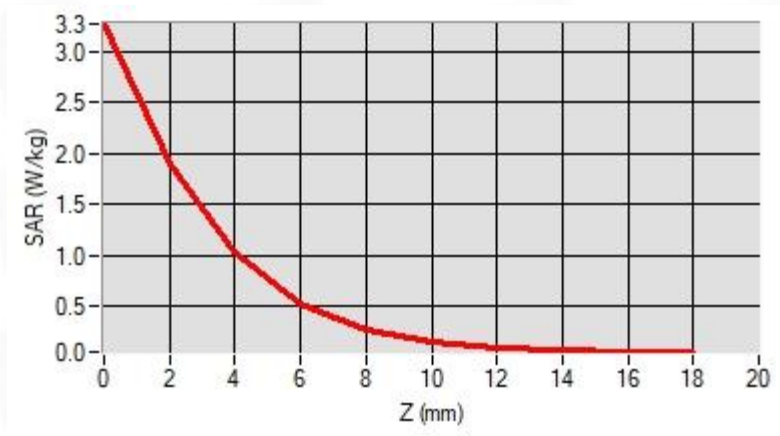

F. 3D Image

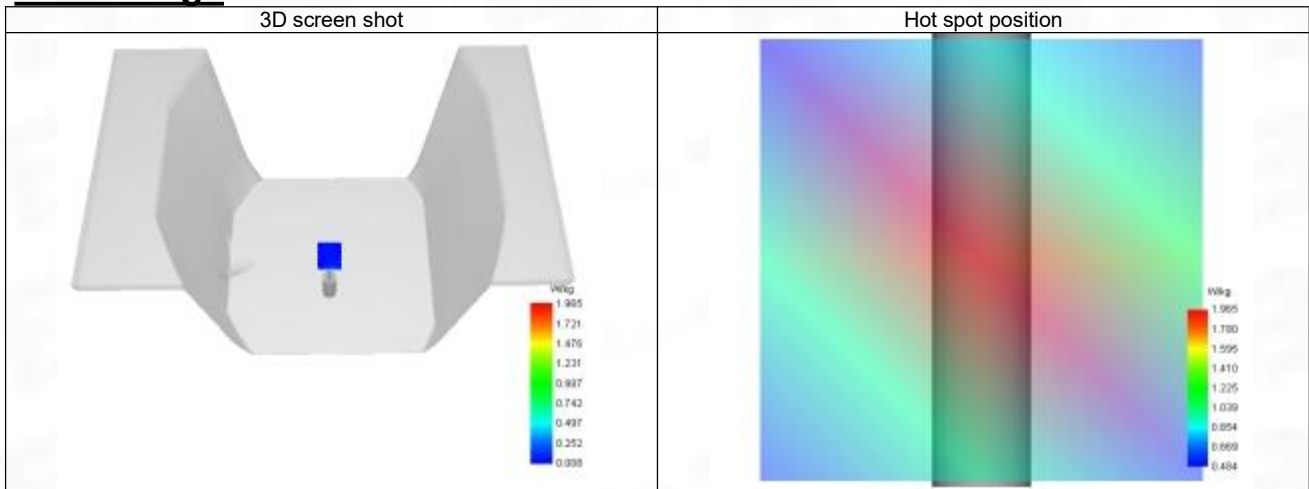

System Performance Check Data (5400 MHz)

System check at 5400 MHz

Date of measurement: 1/8/2024


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.12
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=2mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5400.000
Relative permittivity (real part)	35.680
Relative permittivity (imaginary part)	16.320
Conductivity (S/m)	4.900

C. SAR Surface and Volume

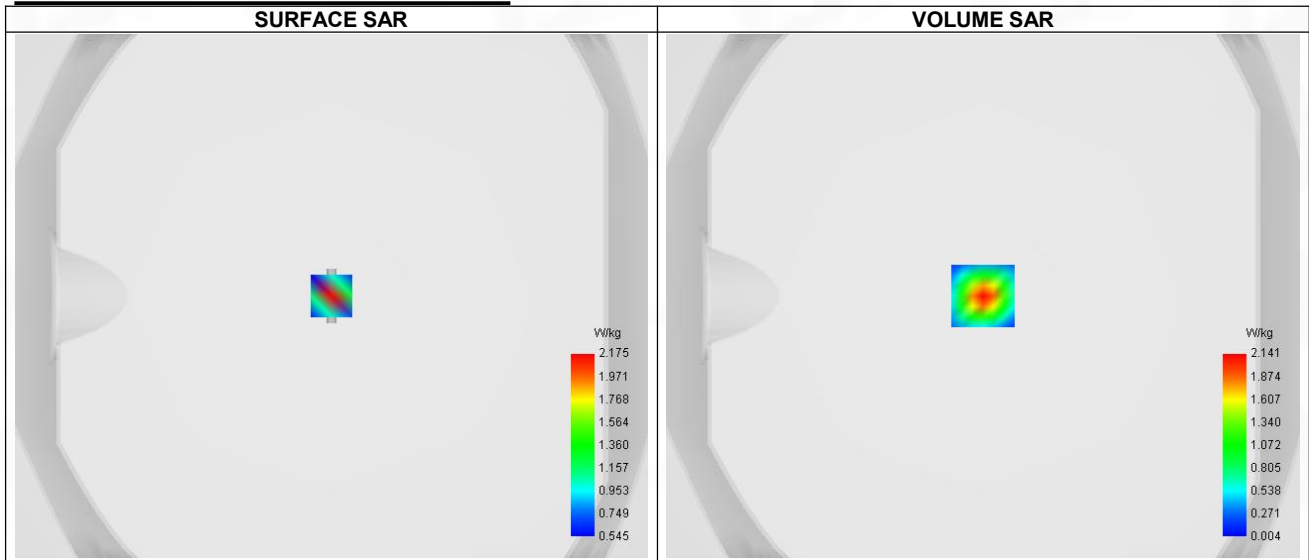


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.78 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.299
SAR 1g (W/Kg)	1.051
Variation (%)	-4.610
Horizontal validation criteria: minimum distance (mm)	6.274
Vertical validation criteria: SAR ratio M2/M1 (%)	54.97%

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.660	2.141	1.177	0.614	0.317	0.169	0.098	0.065	0.050

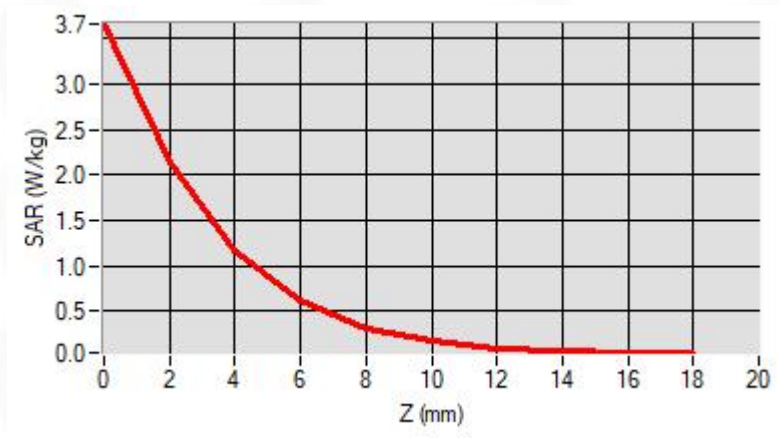

F. 3D Image

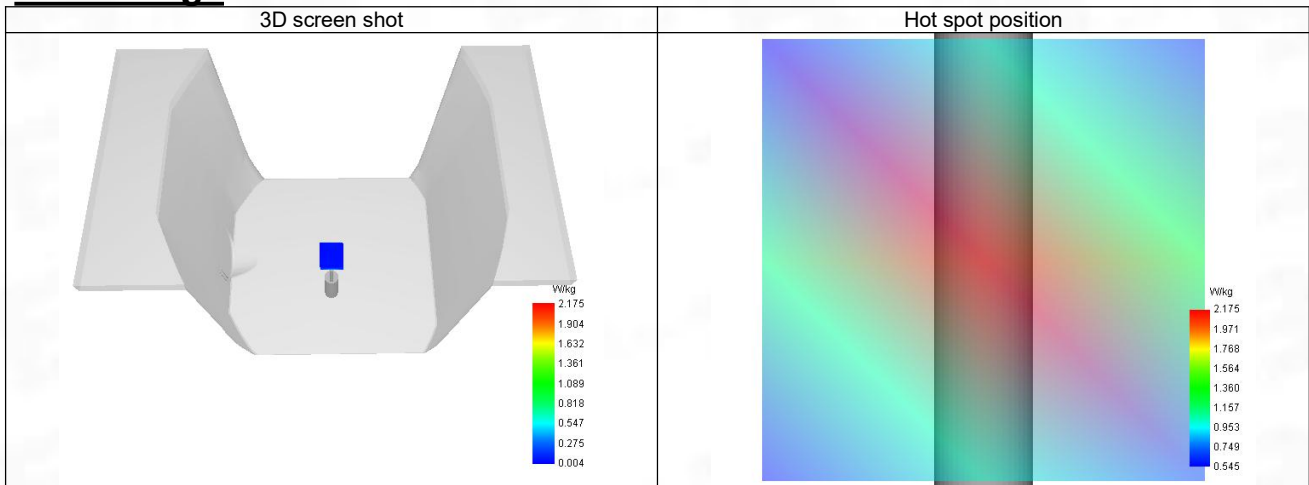

System Performance Check Data (5600 MHz)

System check at 5600 MHz

Date of measurement: 5/8/2024


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	2.18
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5600.000
Relative permittivity (real part)	35.380
Relative permittivity (imaginary part)	16.420
Conductivity (S/m)	5.110

C. SAR Surface and Volume

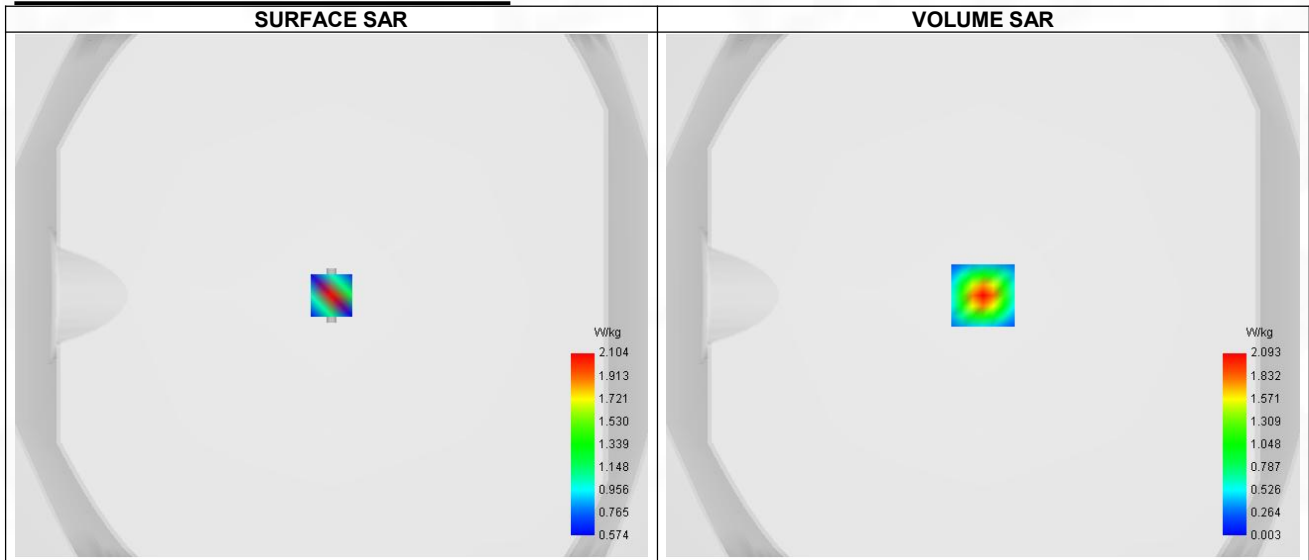


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.90 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.304
SAR 1g (W/Kg)	1.084
Variation (%)	-0.190
Horizontal validation criteria: minimum distance (mm)	7.214
Vertical validation criteria: SAR ratio M2/M1 (%)	51.31%

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.748	2.093	1.074	0.514	0.243	0.122	0.072	0.056	0.056

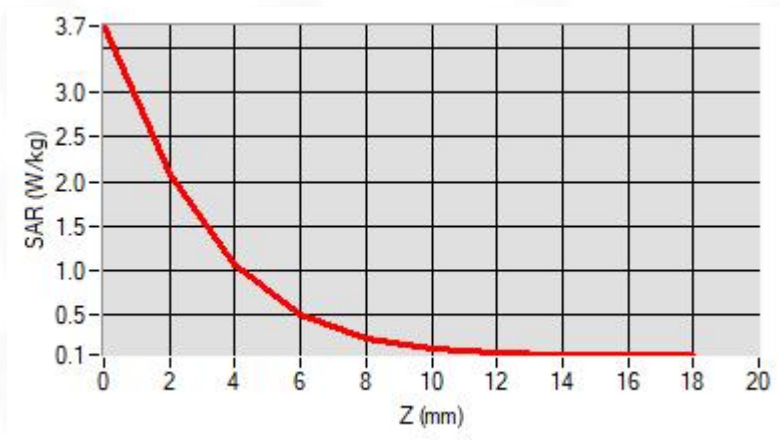

F. 3D Image

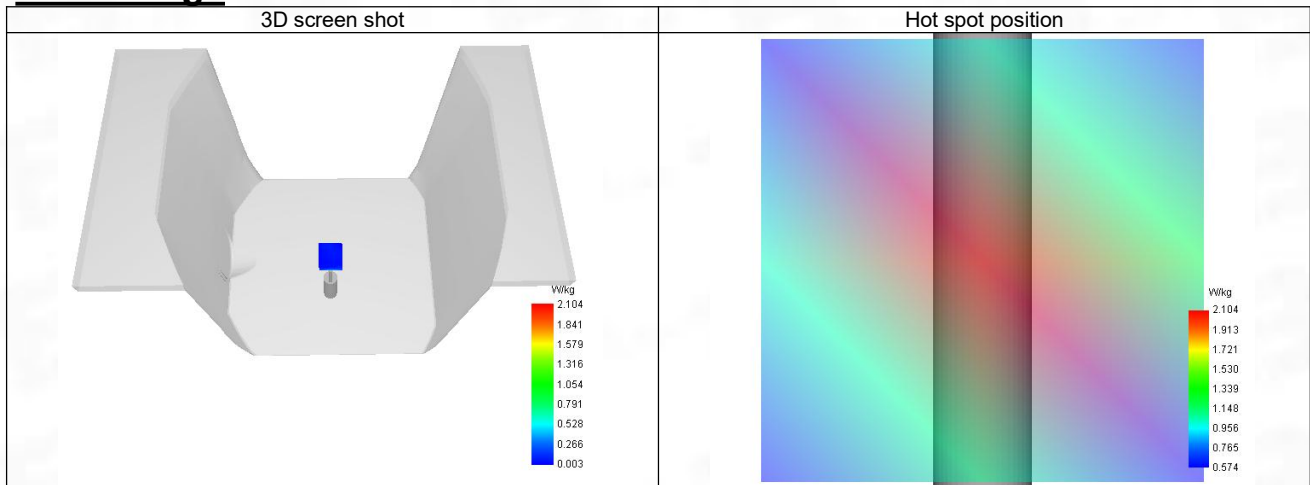

System Performance Check Data (5800 MHz)

System check at 5800 MHz

Date of measurement: 6/8/2024


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.04
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5800.000
Relative permittivity (real part)	35.180
Relative permittivity (imaginary part)	16.480
Conductivity (S/m)	5.310

C. SAR Surface and Volume

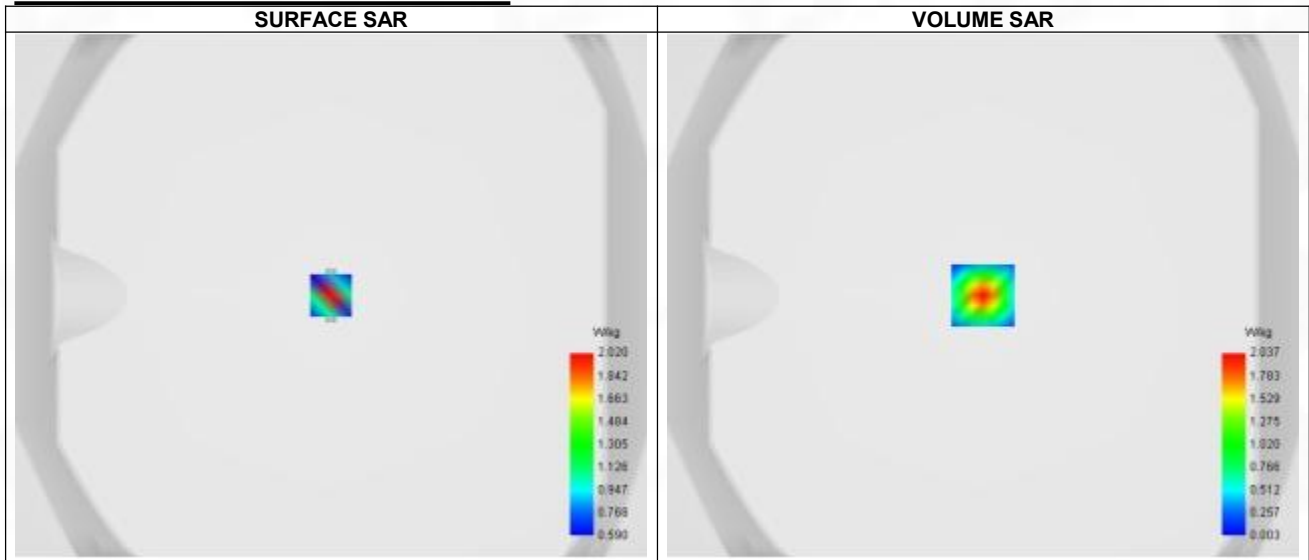


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 4.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.277
SAR 1g (W/Kg)	0.981
Variation (%)	0.490
Horizontal validation criteria: minimum distance (mm)	7.145
Vertical validation criteria: SAR ratio M2/M1 (%)	44.92%

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.948	2.037	0.915	0.361	0.135	0.055	0.033	0.037	0.059

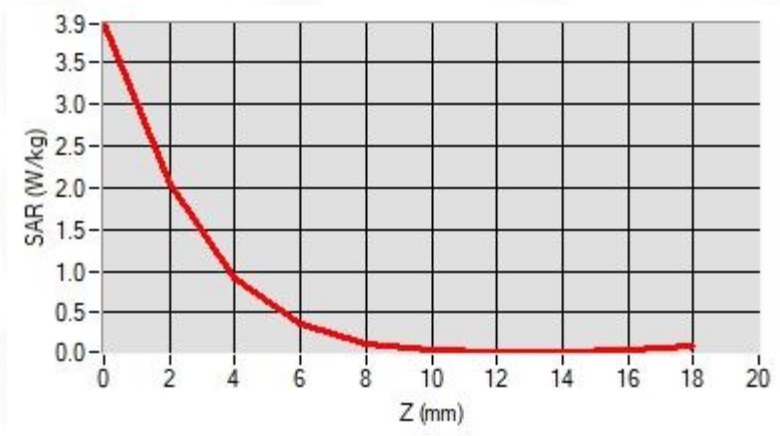

F. 3D Image

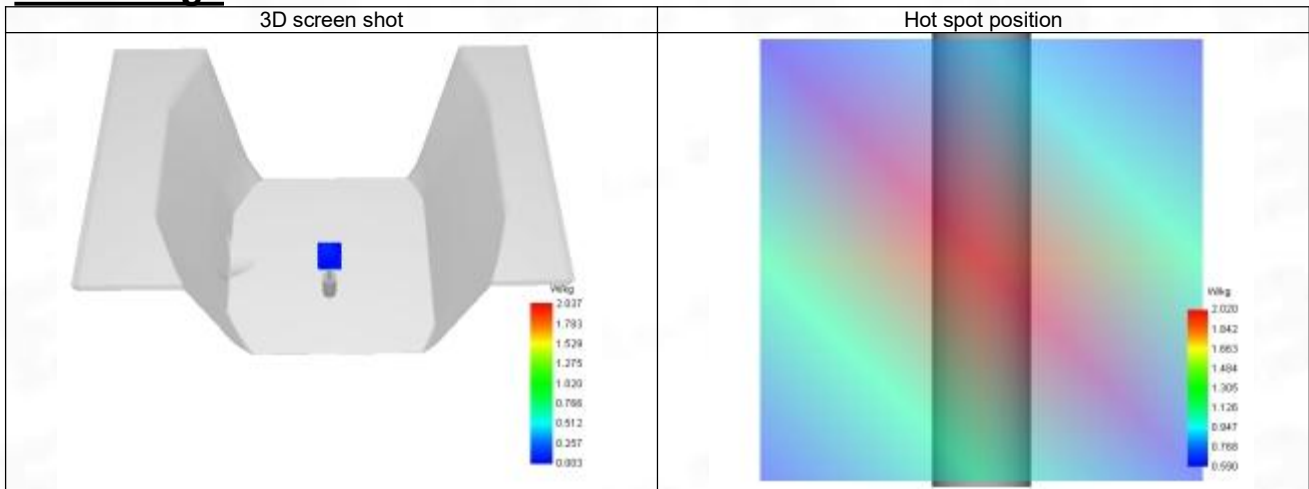

ANNEX C Test Data

1-Head with front position in dist. 0mm on Channel 251 in GSM850 voice

SAR Measurement at GSM850 (Cheek, Right)

Date of measurement: 16/7/2024


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Higher (251)
Signal	TDMA (GSM)
Modulation	GMSK

B. Permittivity

Frequency (MHz)	848.800
Relative permittivity (real part)	41.389
Relative permittivity (imaginary part)	19.413
Conductivity (S/m)	0.877

C. SAR Surface and Volume

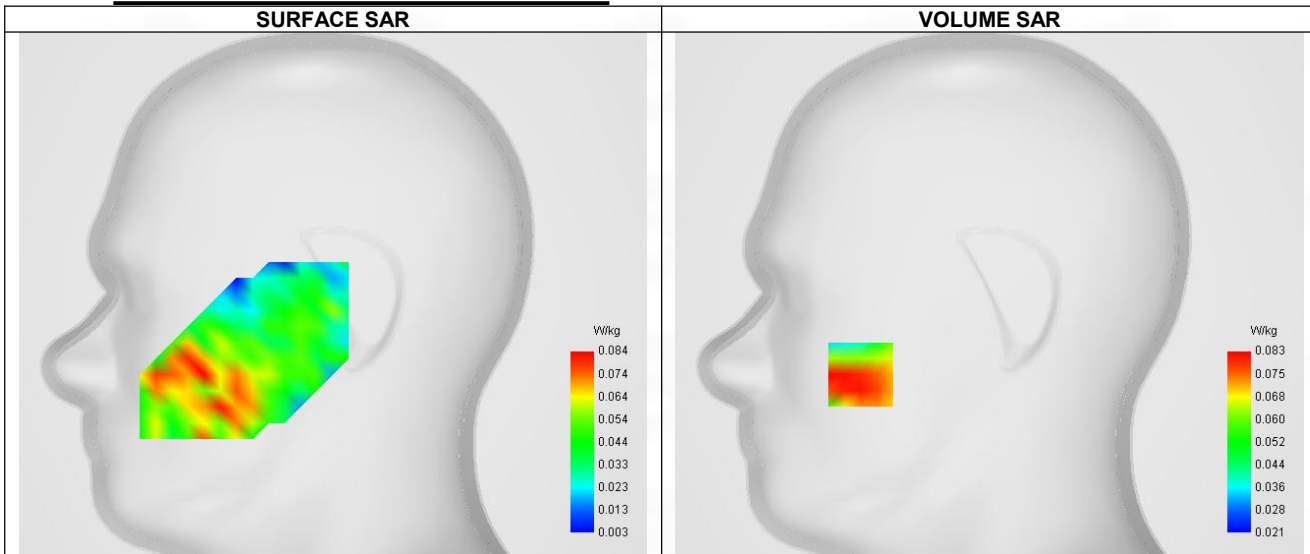


Maximum location: X=-64.00, Y=-40.00 ; SAR Peak: 0.13 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.093
Variation (%)	-3.900
Horizontal validation criteria: minimum distance (mm)	8.105
Vertical validation criteria: SAR ratio M2/M1 (%)	81.93%

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.060	0.083	0.068	0.048	0.042

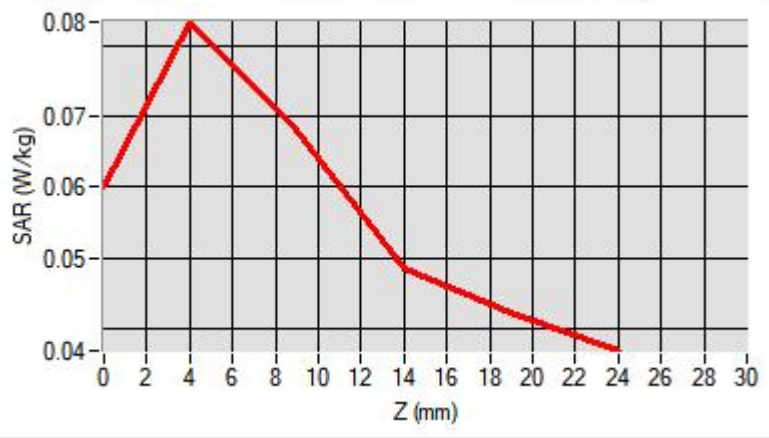

F. 3D Image

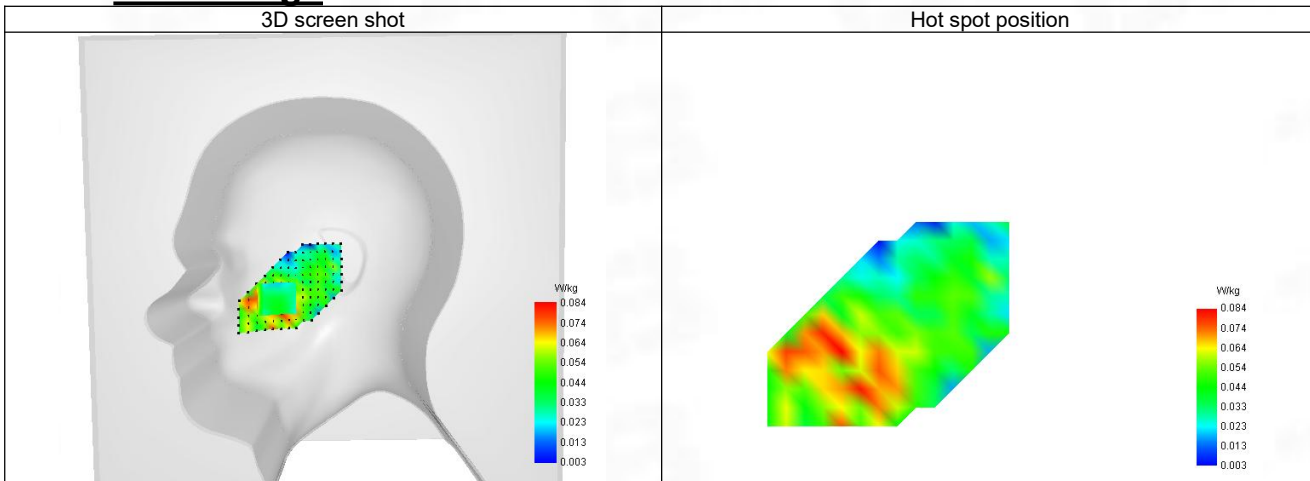

2-Body with back position in dist. 10mm on Channel 251 in GPRS 850+2slots

SAR Measurement at GPRS850 (Body, Validation Plane)

Date of measurement: 16/7/2024


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS850
Channels	Lower (128)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	2

B. Permittivity

Frequency (MHz)	824.200
Relative permittivity (real part)	41.460
Relative permittivity (imaginary part)	19.740
Conductivity (S/m)	0.869

C. SAR Surface and Volume

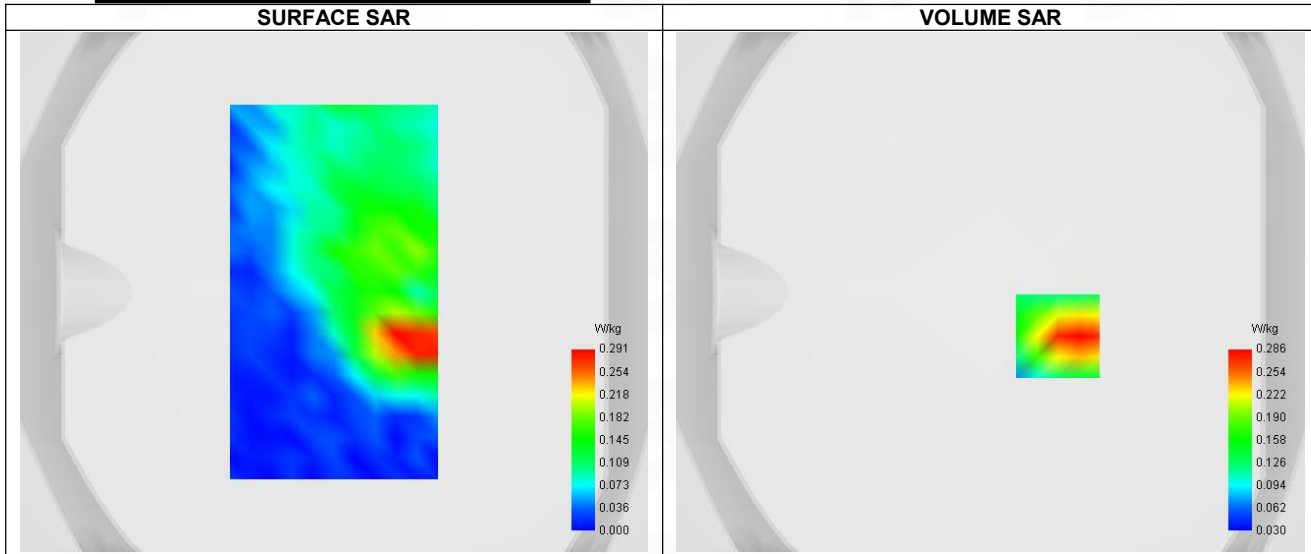


Maximum location: X=26.00, Y=-17.00 ; SAR Peak: 0.41 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.242
Variation (%)	-4.640
Horizontal validation criteria: minimum distance (mm)	8.135
Vertical validation criteria: SAR ratio M2/M1 (%)	53.50%

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.768	0.286	0.153	0.143	0.083

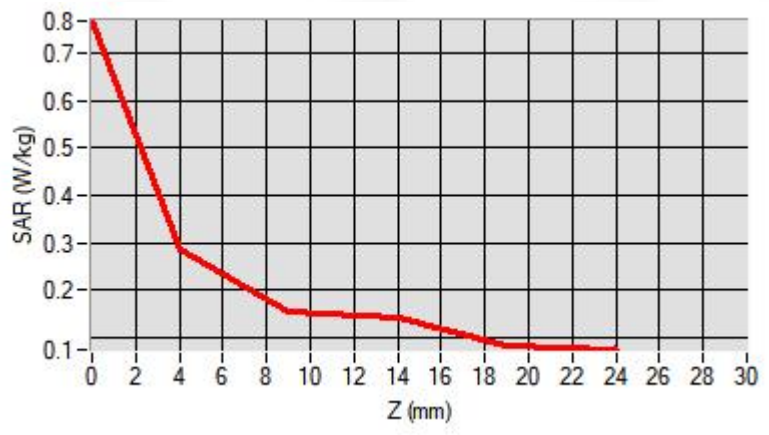

F. 3D Image

