




## 11AX20MIMO\_Ant3\_5180

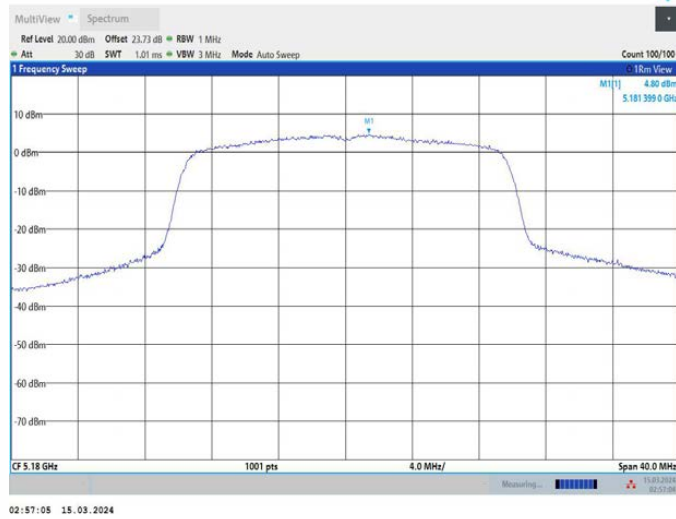


## 11AX20MIMO\_Ant1\_5200

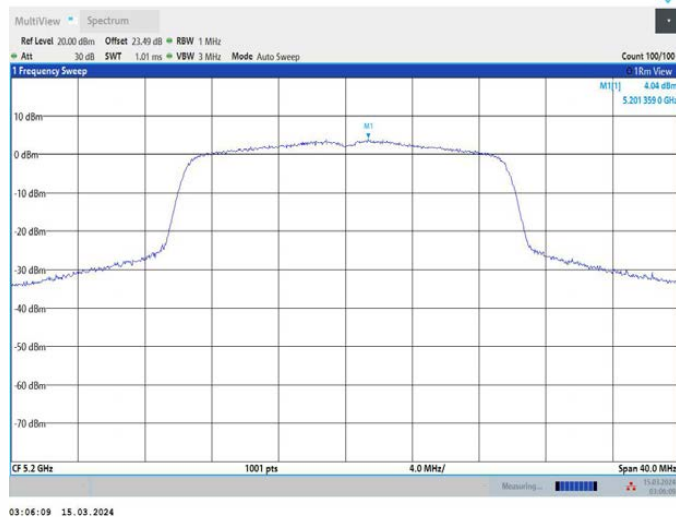


## 11AX20MIMO\_Ant2\_5200

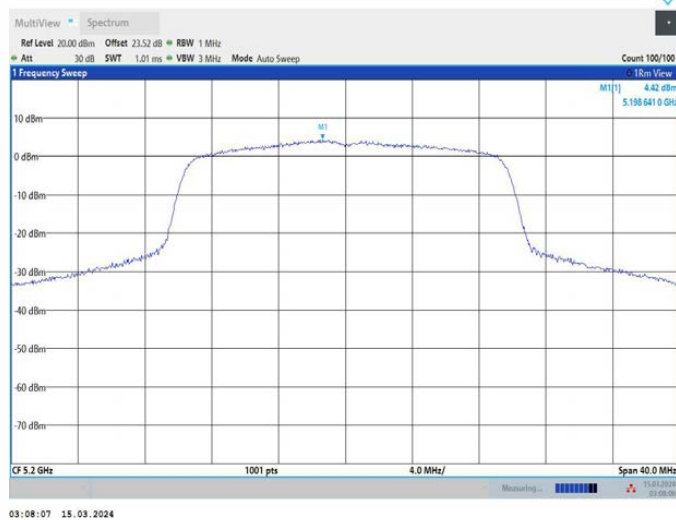


## 11AX20MIMO\_Ant3\_5200

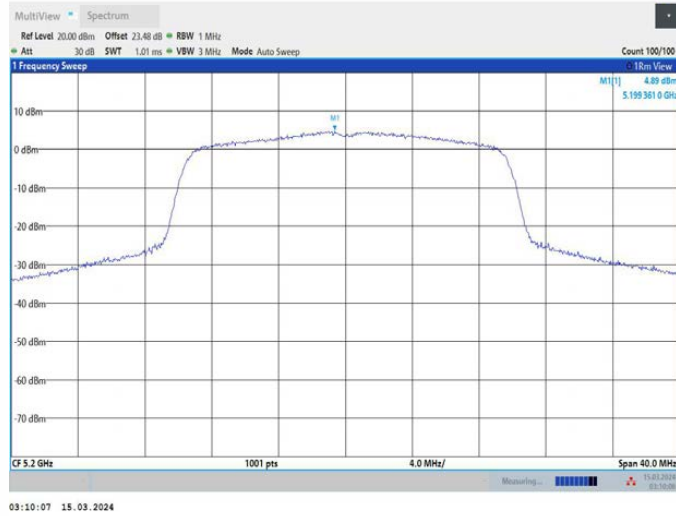


## 11AX20MIMO\_Ant1\_5240

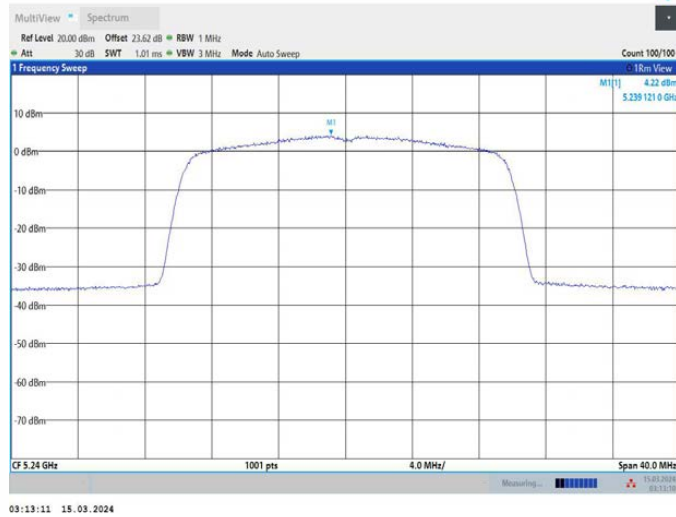


## 11AX20MIMO\_Ant2\_5240

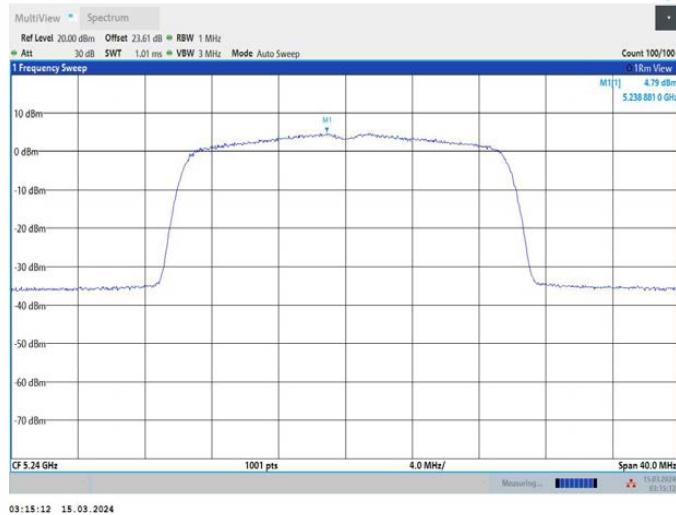


## 11AX20MIMO\_Ant3\_5240

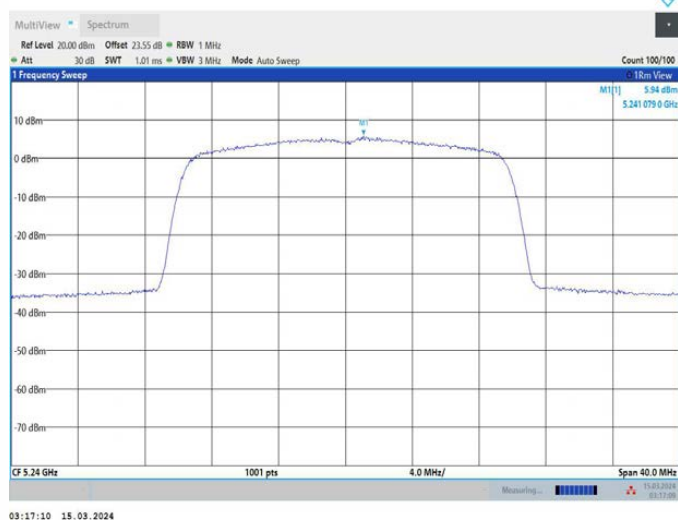


## 11AX20MIMO\_Ant1\_5260

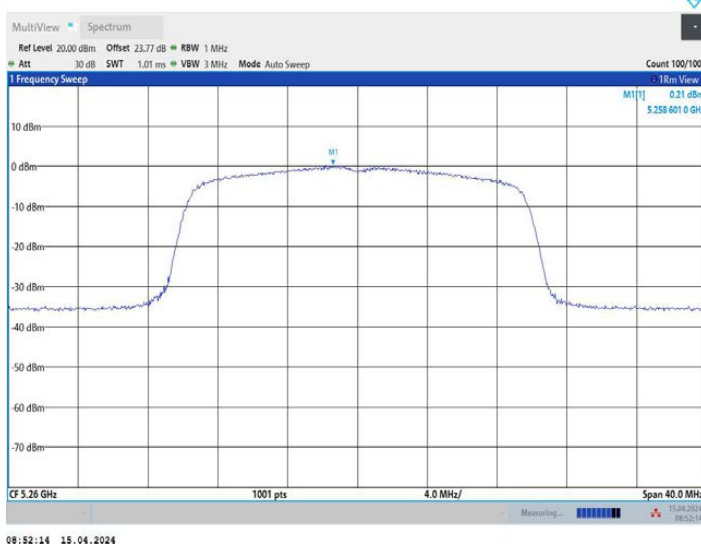

## 11AX20MIMO\_Ant2\_5260

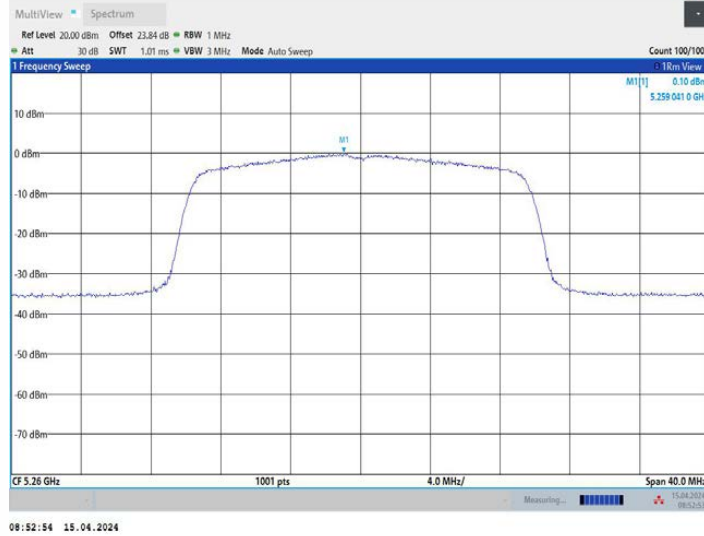


11AX20MIMO\_Ant3\_5260

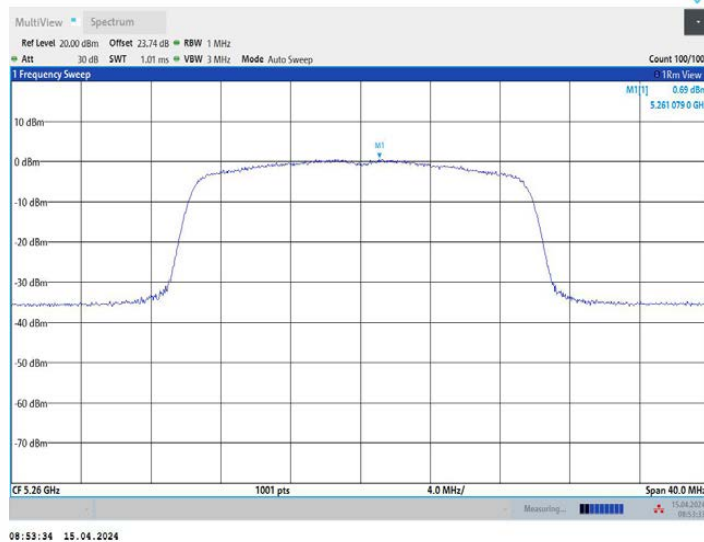


11AX20MIMO\_Ant1\_5280




11AX20MIMO\_Ant2\_5280

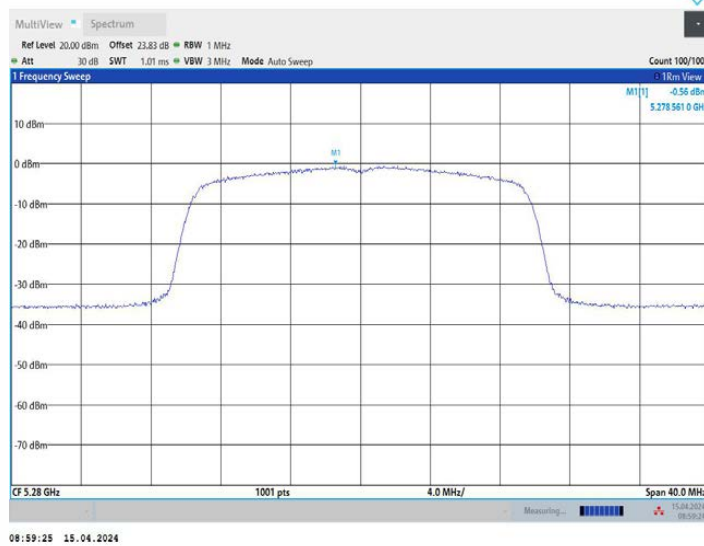


11AX20MIMO\_Ant3\_5280

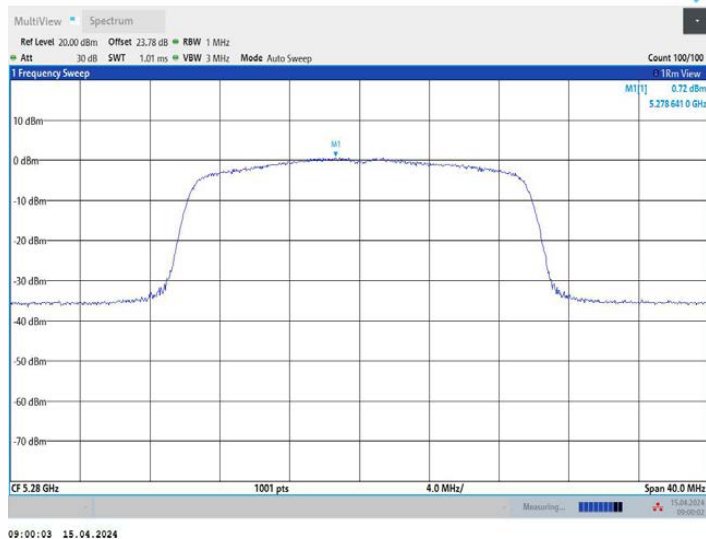


11AX20MIMO\_Ant1\_5320

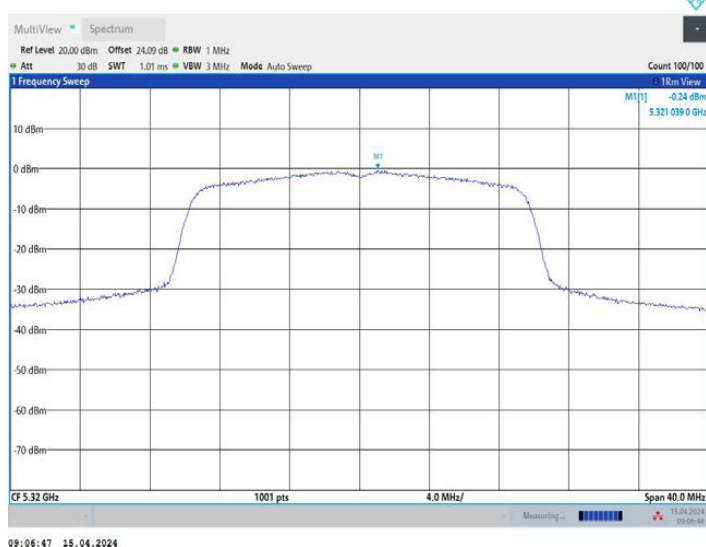


11AX20MIMO\_Ant2\_5320

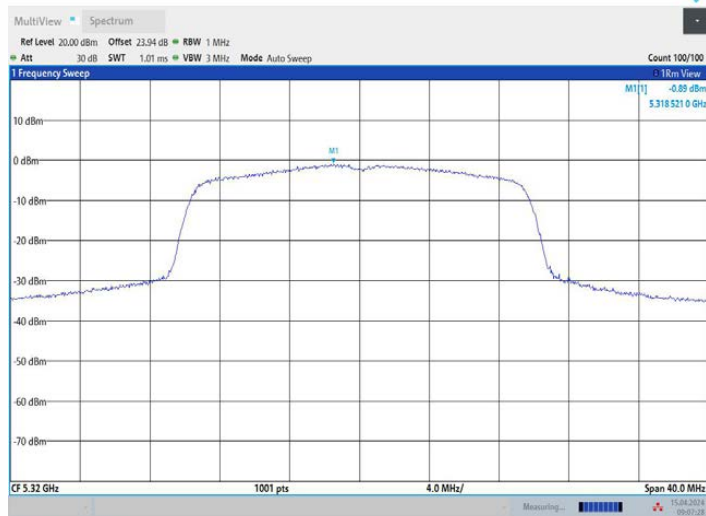


11AX20MIMO\_Ant3\_5320

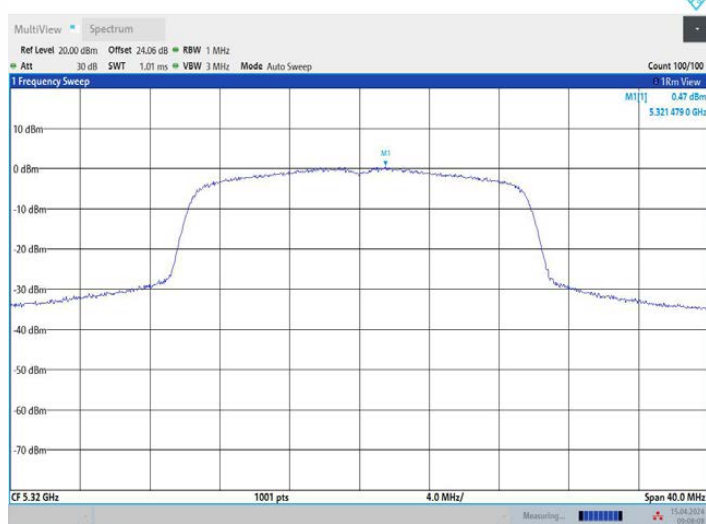


11AX20MIMO\_Ant1\_5500

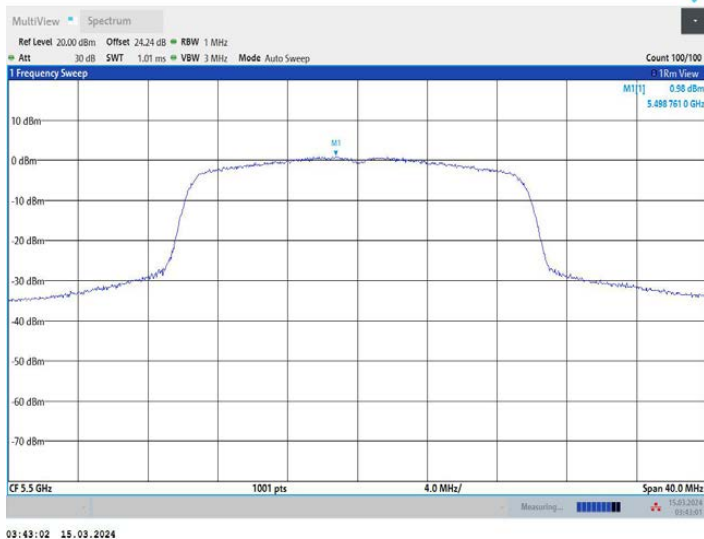


11AX20MIMO\_Ant2\_5500

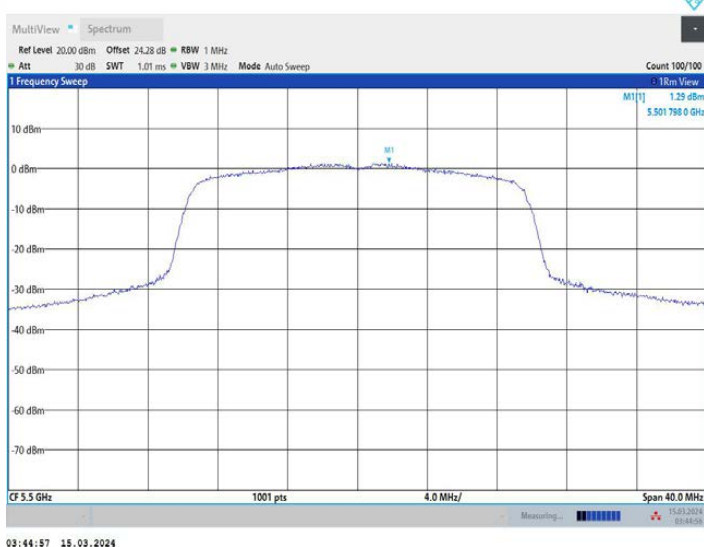


11AX20MIMO\_Ant3\_5500

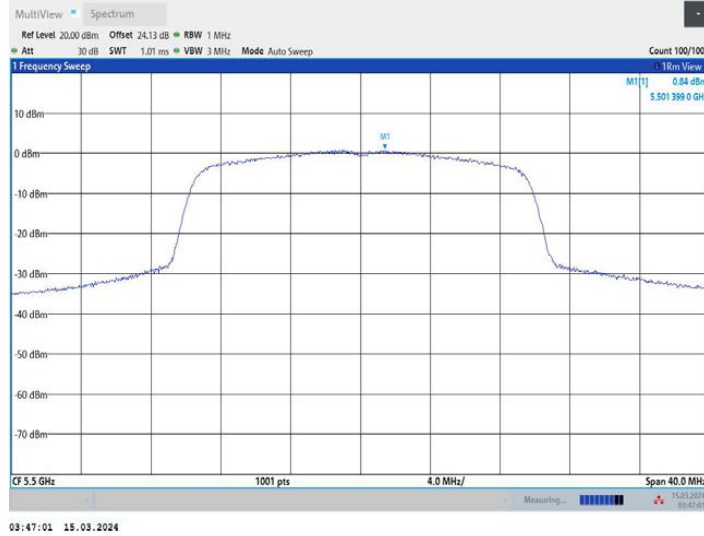


11AX20MIMO\_Ant1\_5580

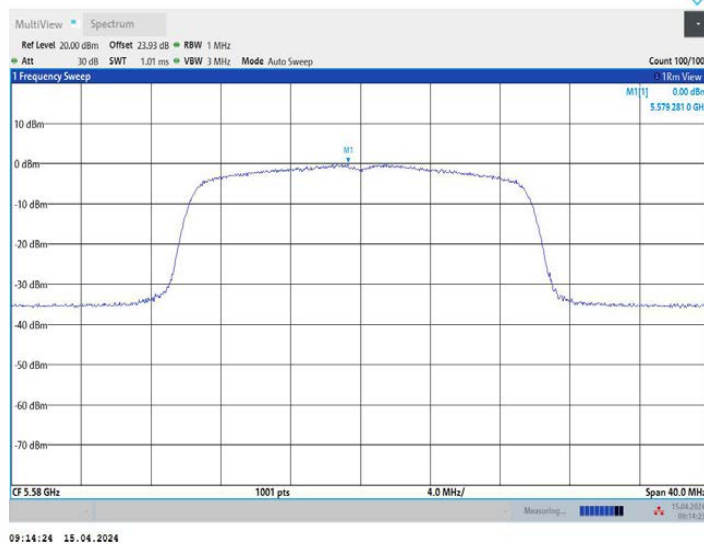


11AX20MIMO\_Ant2\_5580

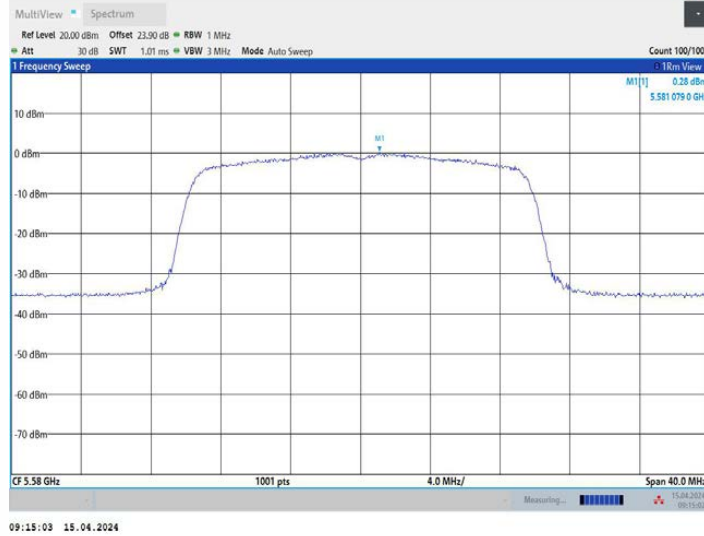


11AX20MIMO\_Ant3\_5580

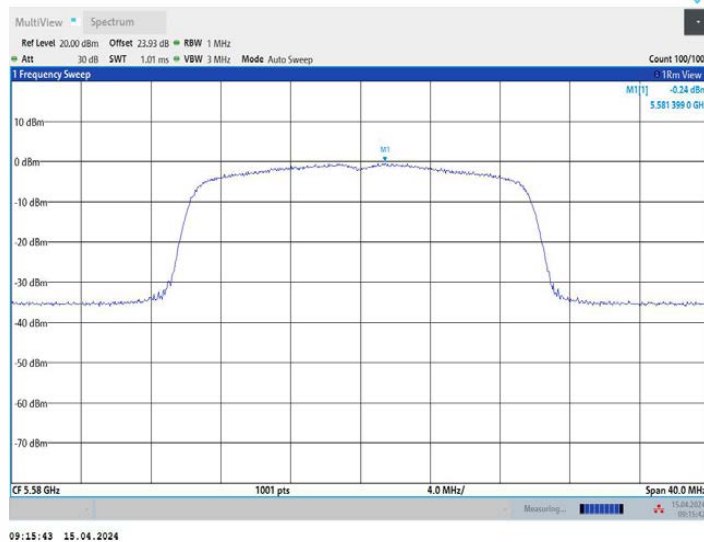

11AX20MIMO\_Ant1\_5700

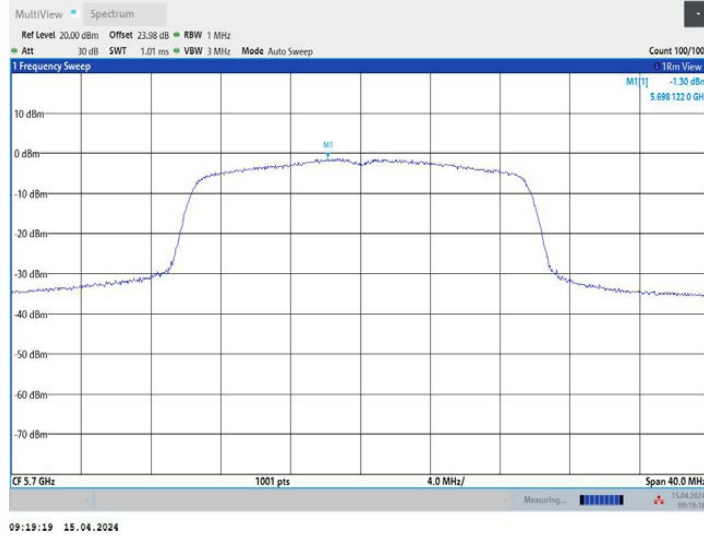


11AX20MIMO\_Ant2\_5700

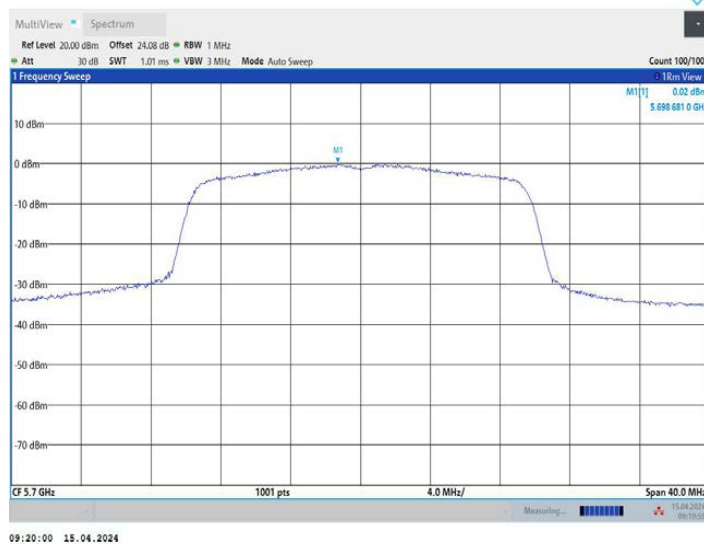


11AX20MIMO\_Ant3\_5700




11AX20MIMO\_Ant1\_5745

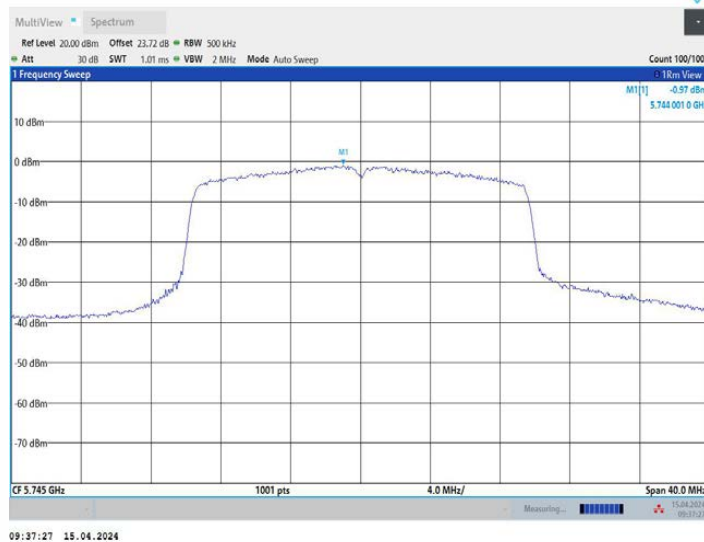


11AX20MIMO\_Ant2\_5745

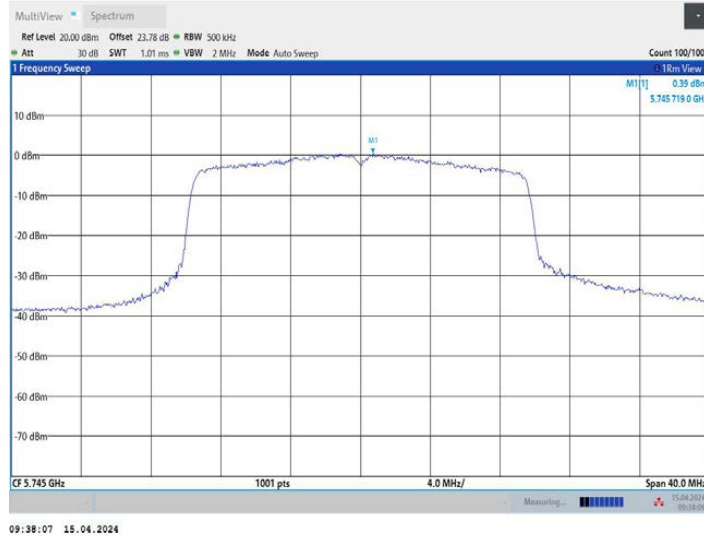


11AX20MIMO\_Ant3\_5745

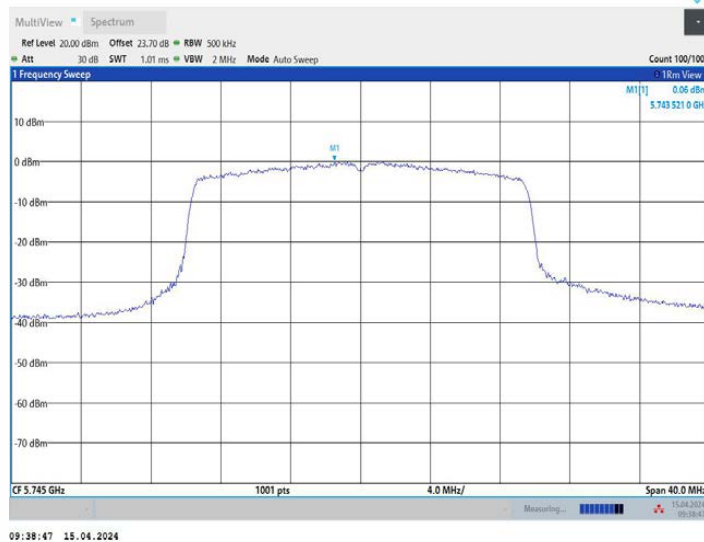


11AX20MIMO\_Ant1\_5785

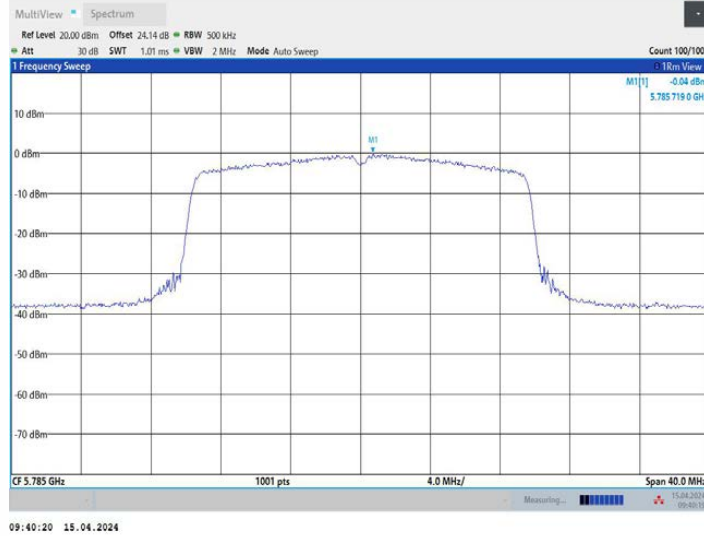


11AX20MIMO\_Ant2\_5785

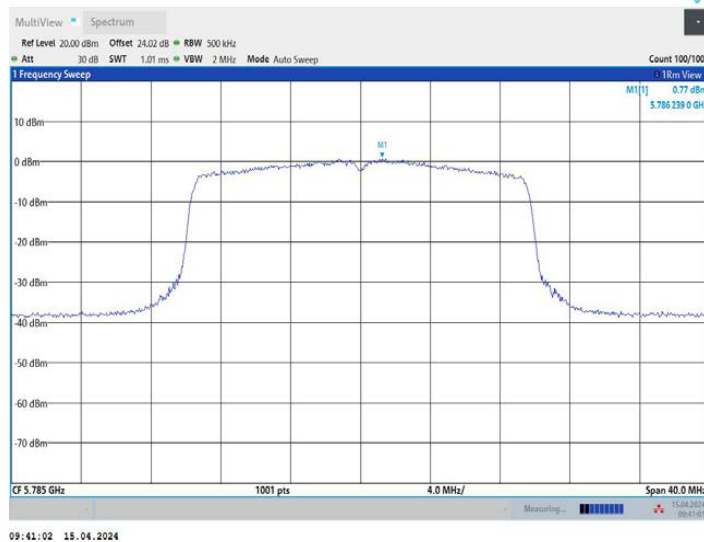


11AX20MIMO\_Ant3\_5785

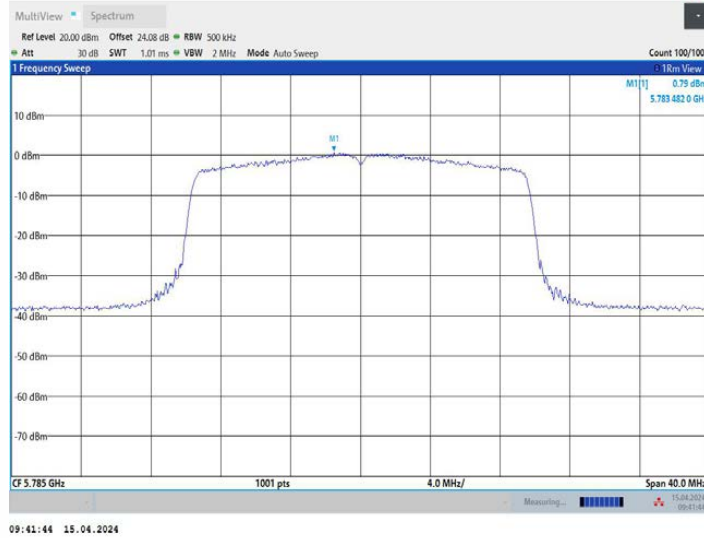


11AX20MIMO\_Ant1\_5825

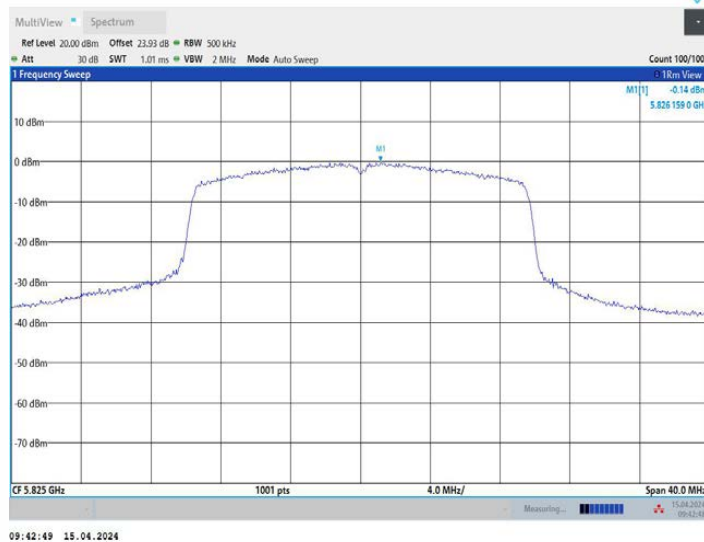


11AX20MIMO\_Ant2\_5825

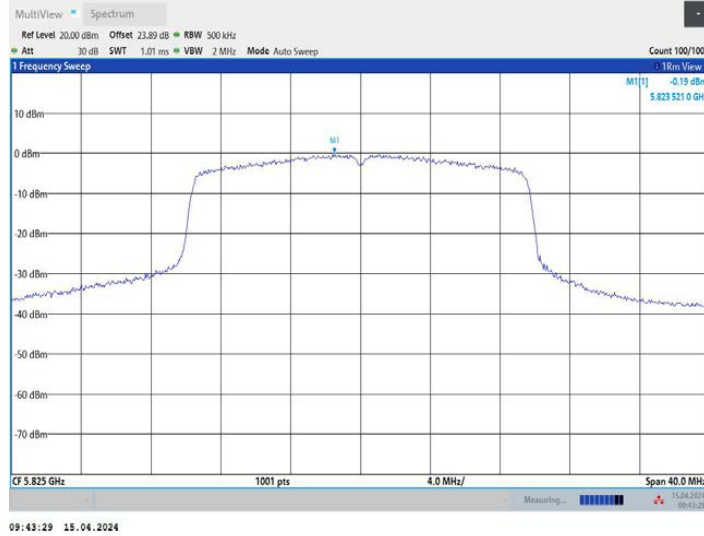


11AX20MIMO\_Ant3\_5825

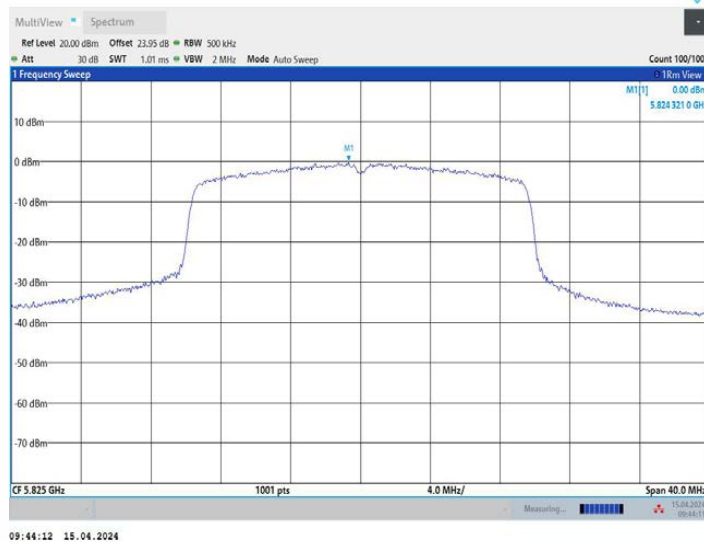


11AX40MIMO\_Ant1\_5190

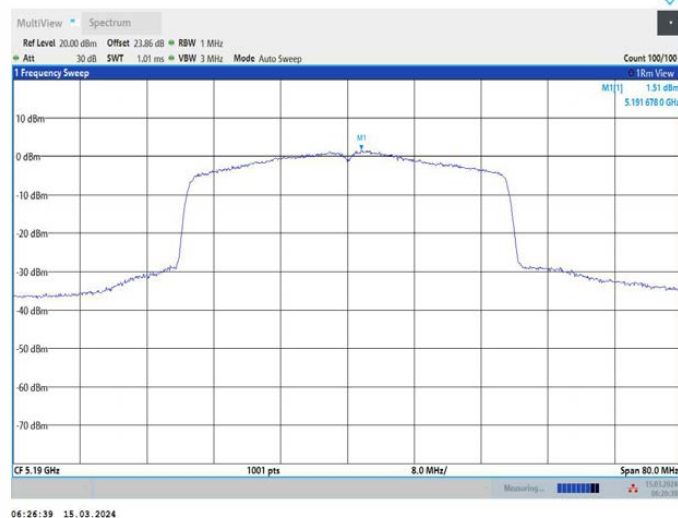


11AX40MIMO\_Ant2\_5190

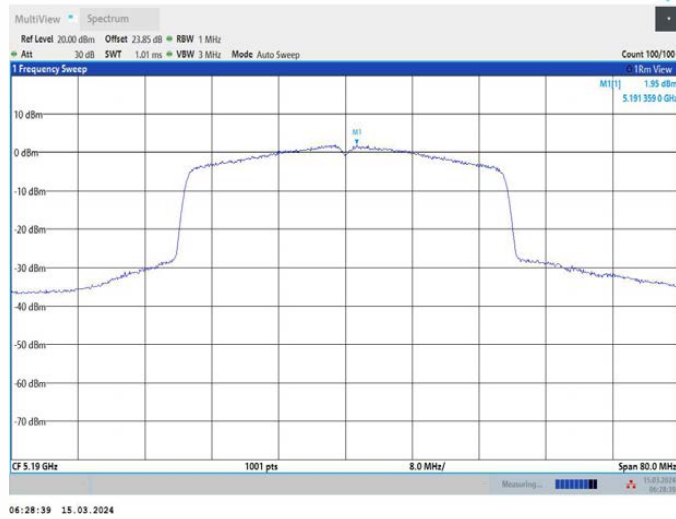


11AX40MIMO\_Ant3\_5190

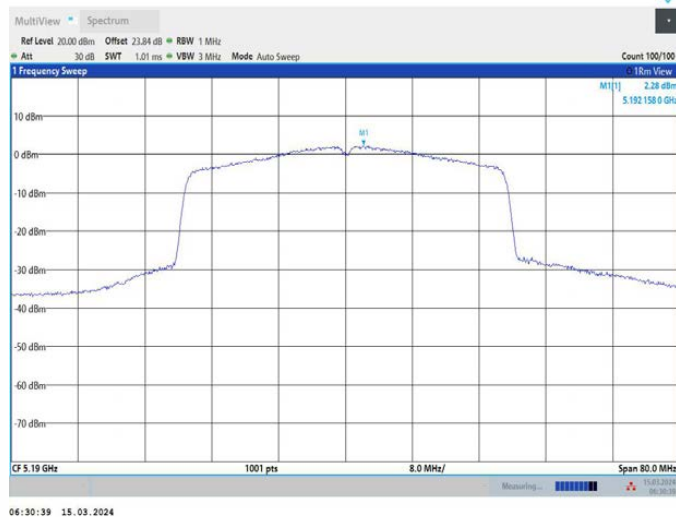

11AX40MIMO\_Ant1\_5230

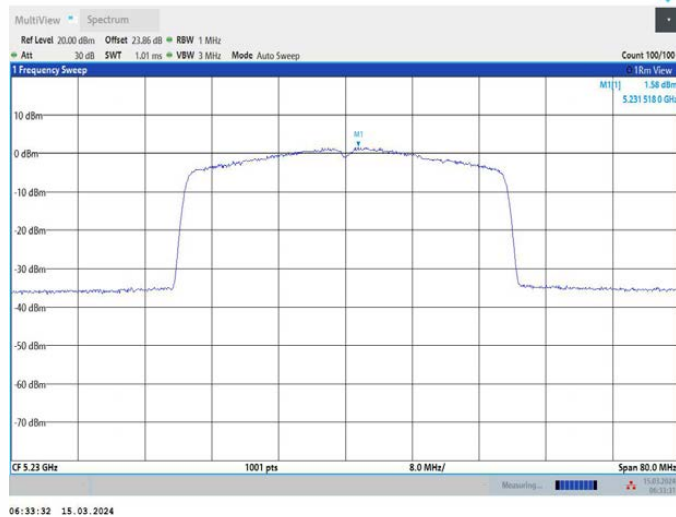


## 11AX40MIMO\_Ant2\_5230

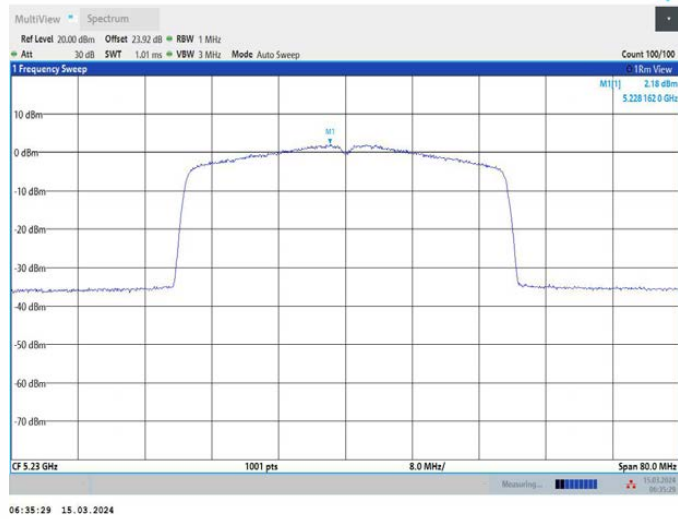


## 11AX40MIMO\_Ant3\_5230




## 11AX40MIMO\_Ant1\_5270

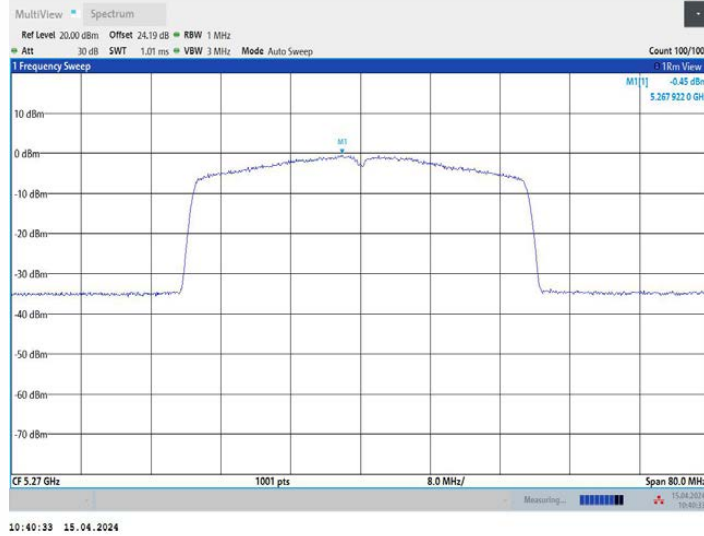


11AX40MIMO\_Ant2\_5270

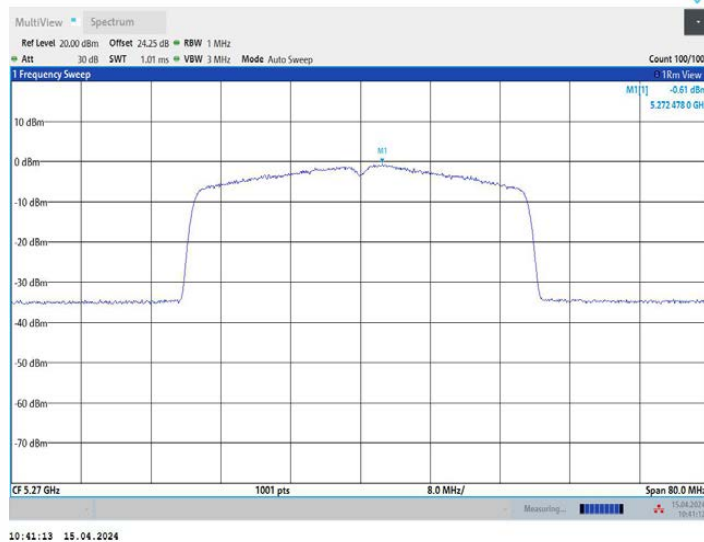


11AX40MIMO\_Ant3\_5270

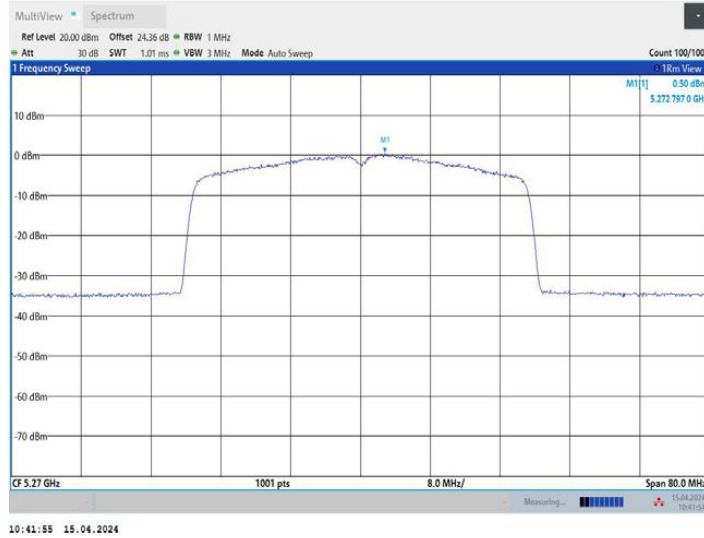


11AX40MIMO\_Ant1\_5310

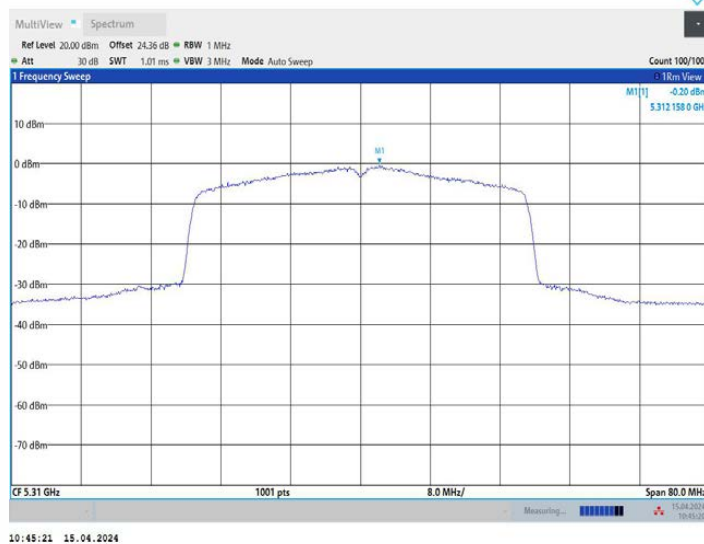


11AX40MIMO\_Ant2\_5310

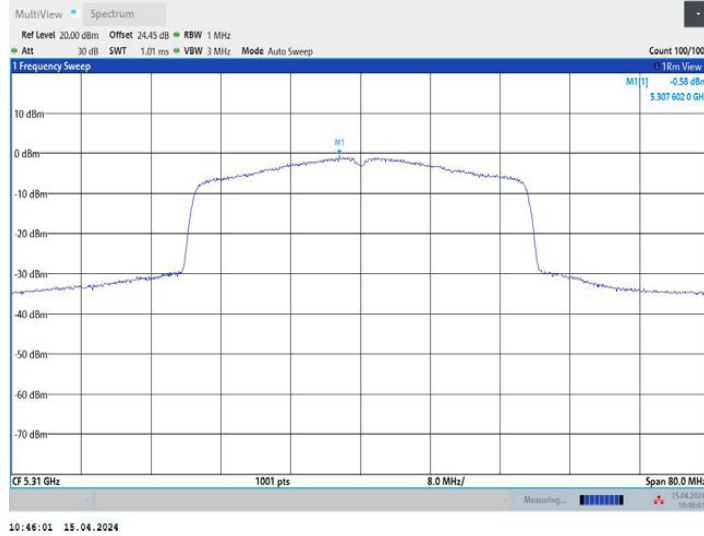


11AX40MIMO\_Ant3\_5310

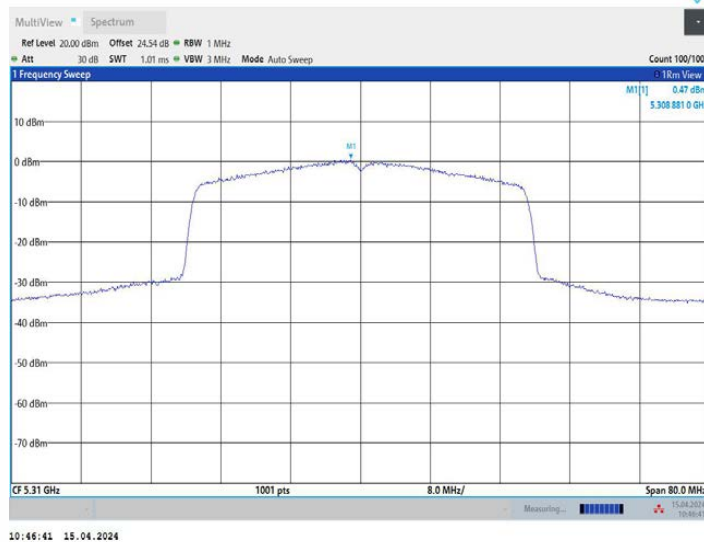


11AX40MIMO\_Ant1\_5510

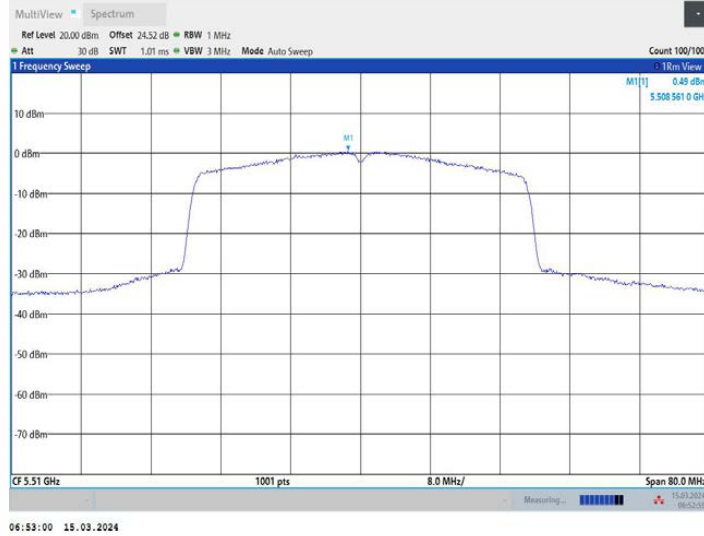


11AX40MIMO\_Ant2\_5510

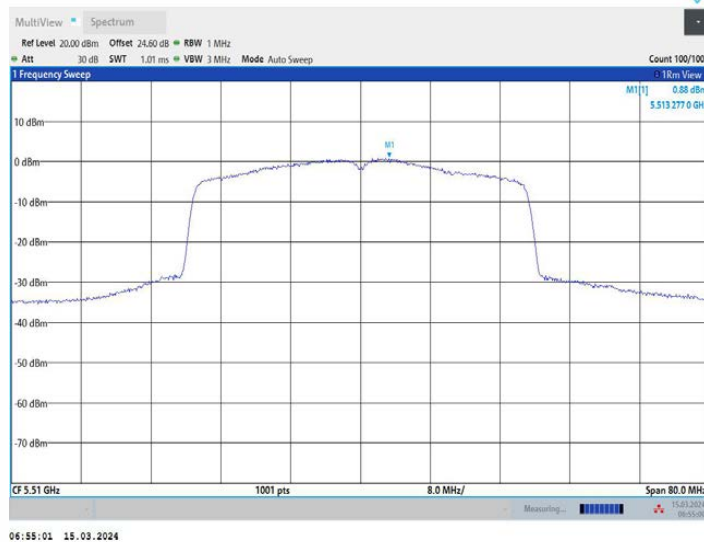


11AX40MIMO\_Ant3\_5510

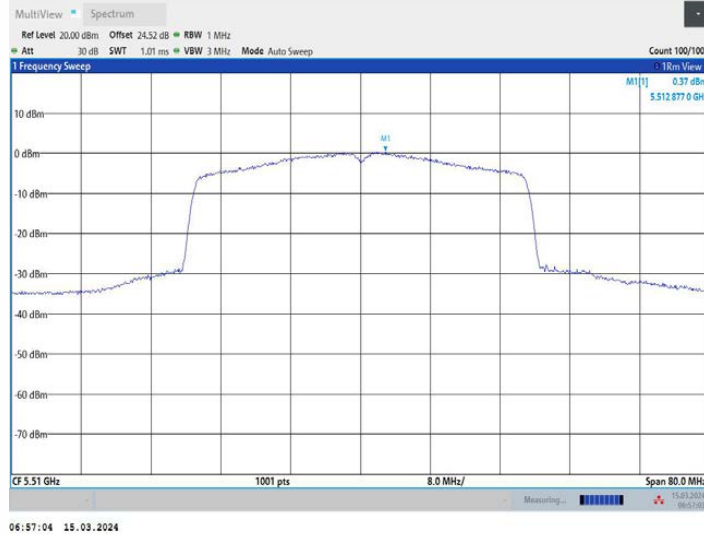


11AX40MIMO\_Ant1\_5550

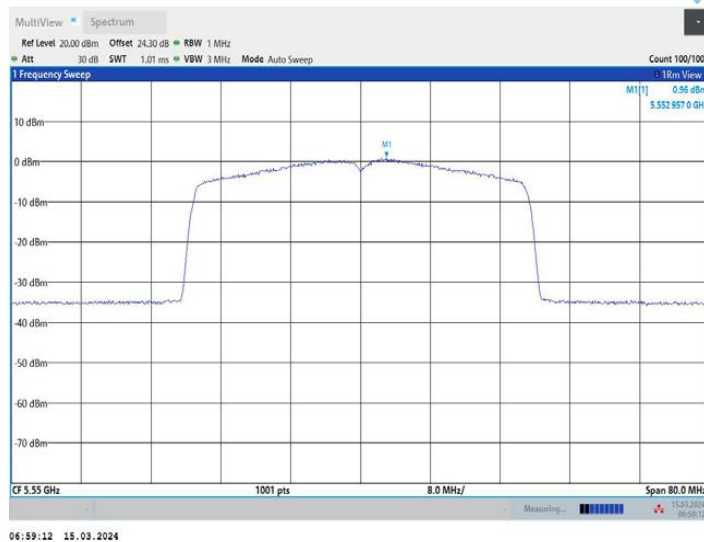


11AX40MIMO\_Ant2\_5550

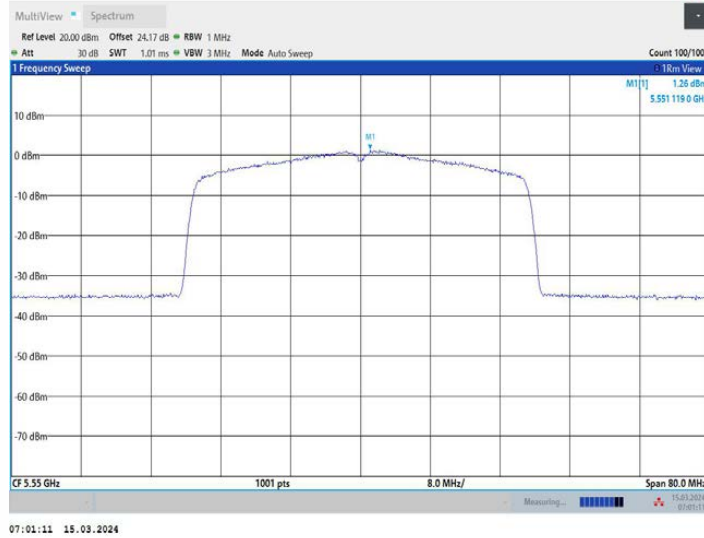


11AX40MIMO\_Ant3\_5550

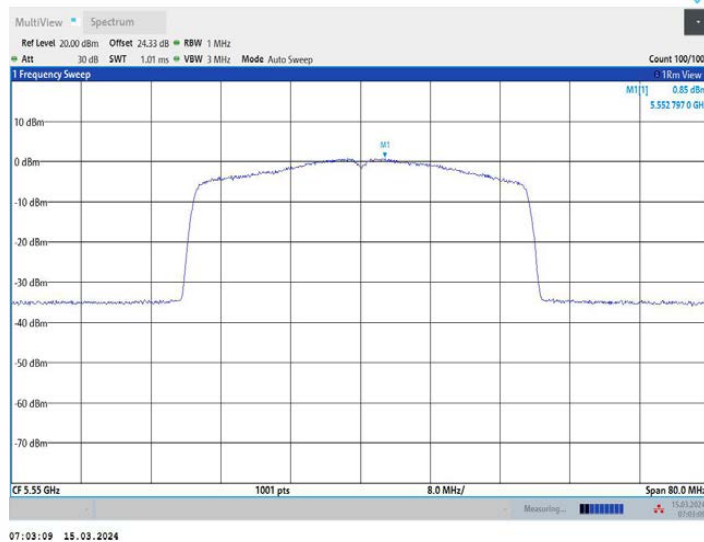


11AX40MIMO\_Ant1\_5670

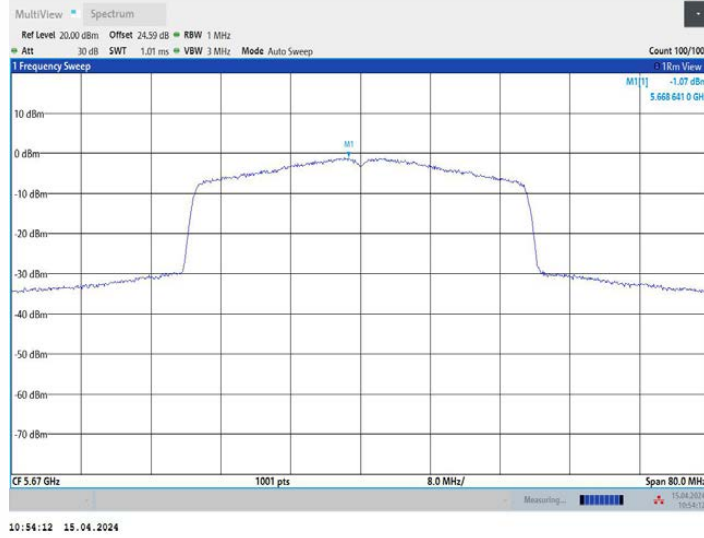


11AX40MIMO\_Ant2\_5670

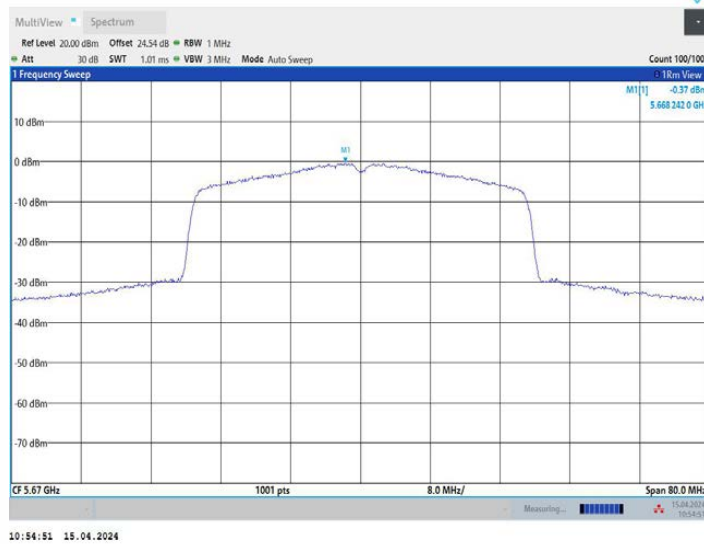


11AX40MIMO\_Ant3\_5670

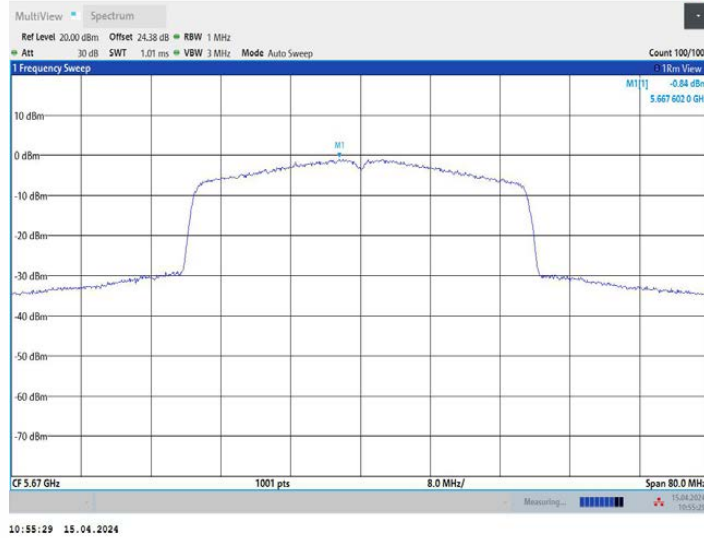


11AX40MIMO\_Ant1\_5755

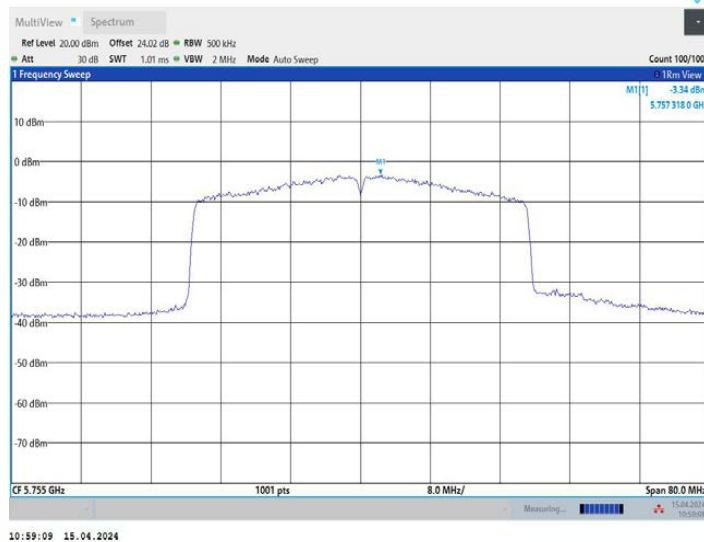


11AX40MIMO\_Ant2\_5755

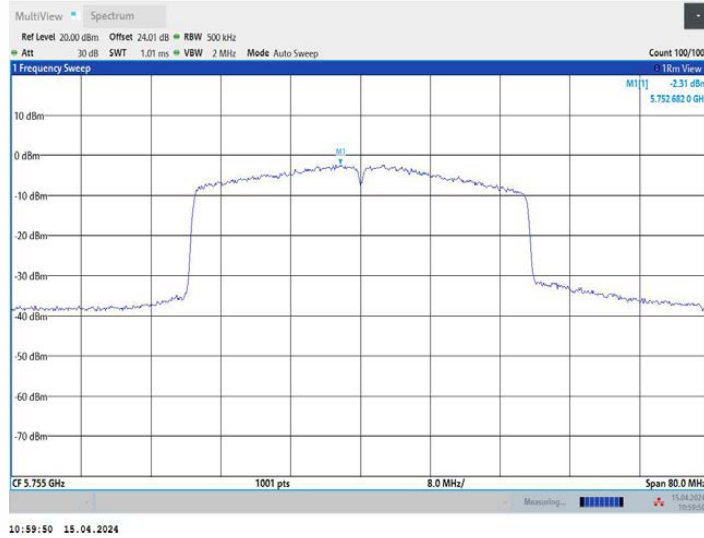


11AX40MIMO\_Ant3\_5755

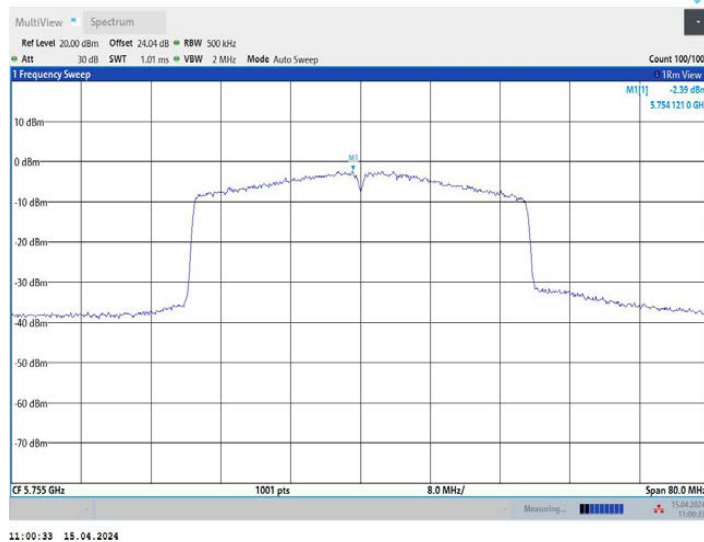


11AX40MIMO\_Ant1\_5795

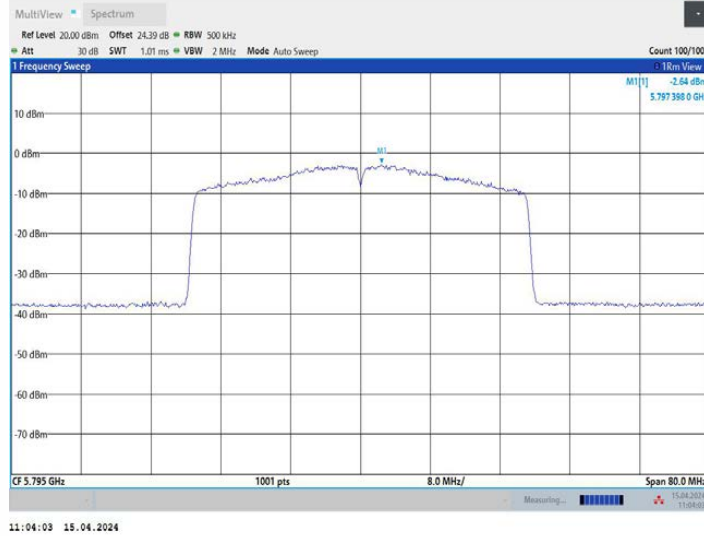


11AX40MIMO\_Ant2\_5795

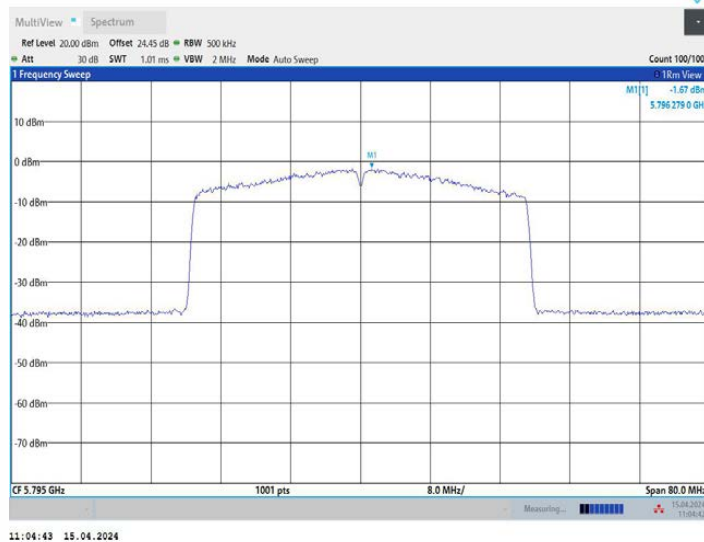


11AX40MIMO\_Ant3\_5795

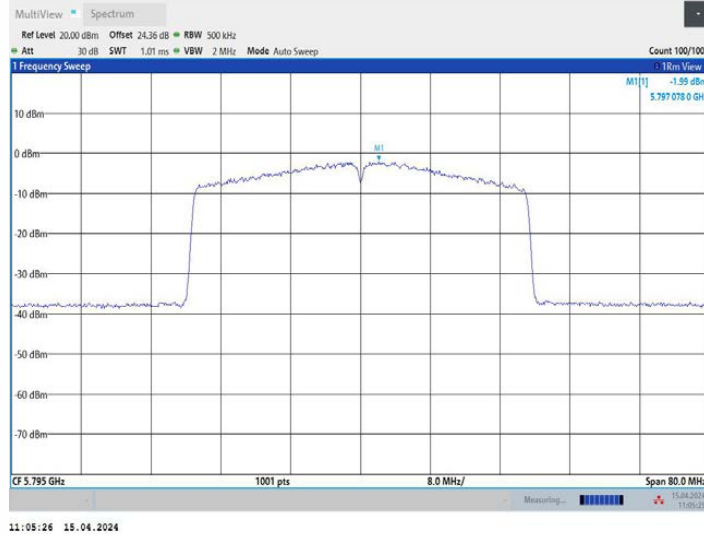


11AX80MIMO\_Ant1\_5210

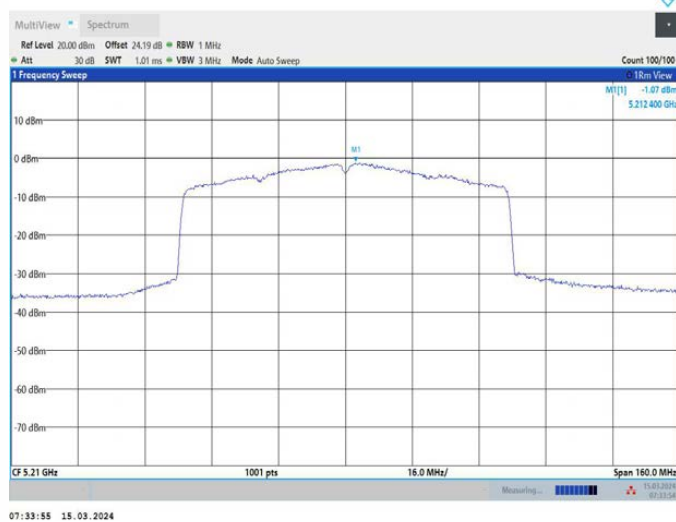


11AX80MIMO\_Ant2\_5210

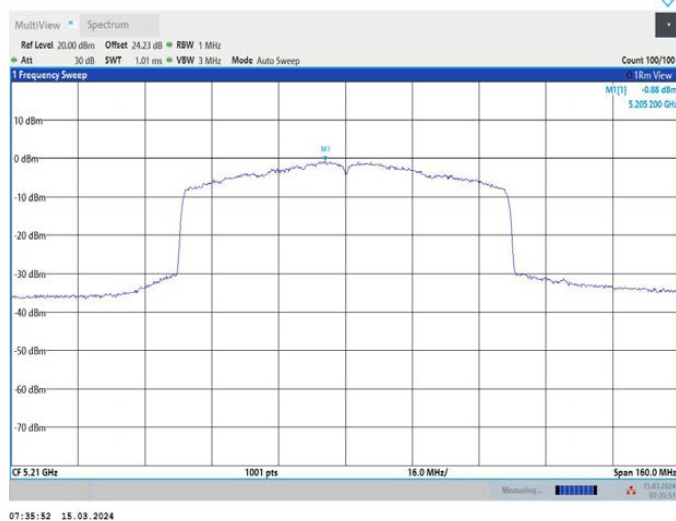


## 11AX80MIMO\_Ant3\_5210

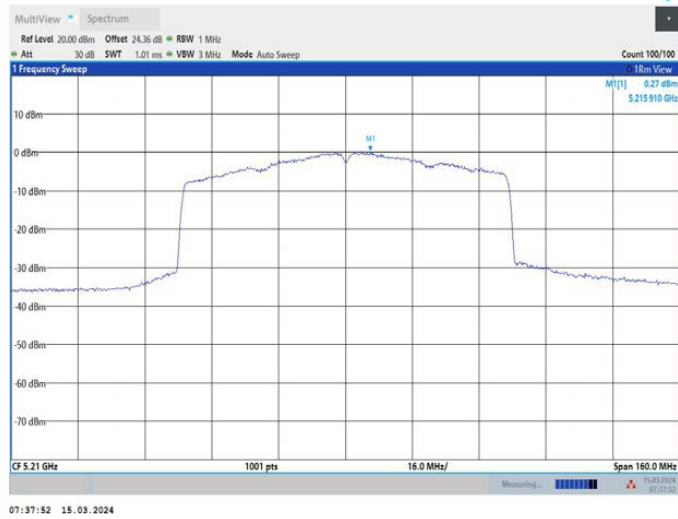


## 11AX80MIMO\_Ant1\_5290

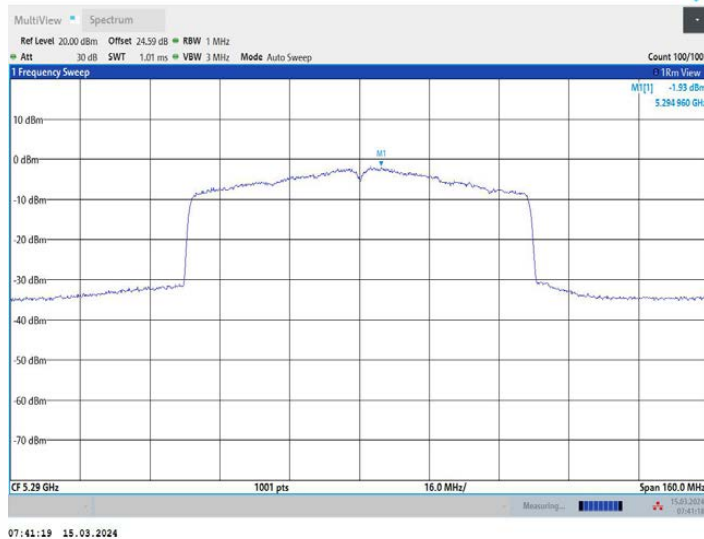


## 11AX80MIMO\_Ant2\_5290

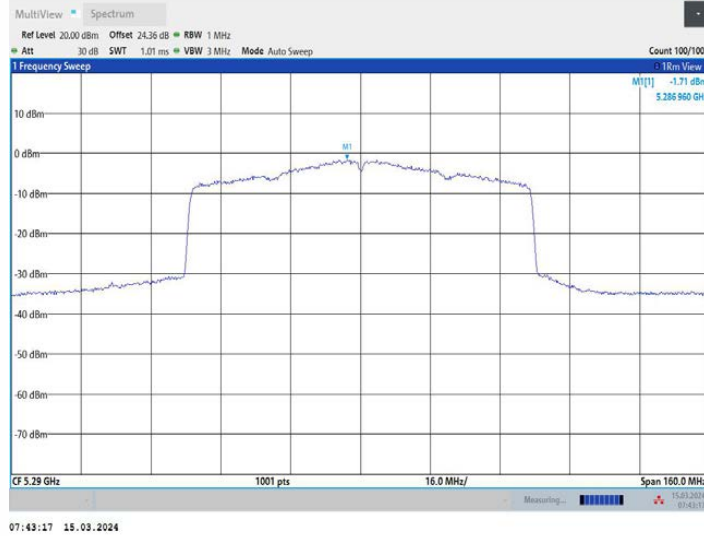


11AX80MIMO\_Ant3\_5290

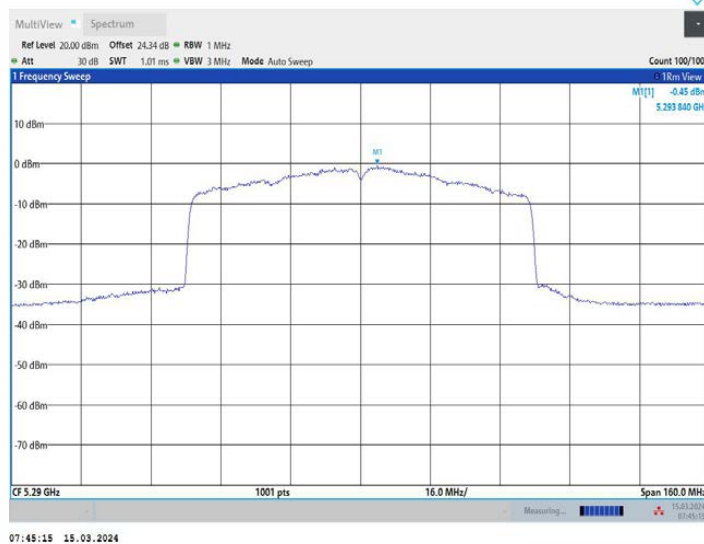


11AX80MIMO\_Ant1\_5530

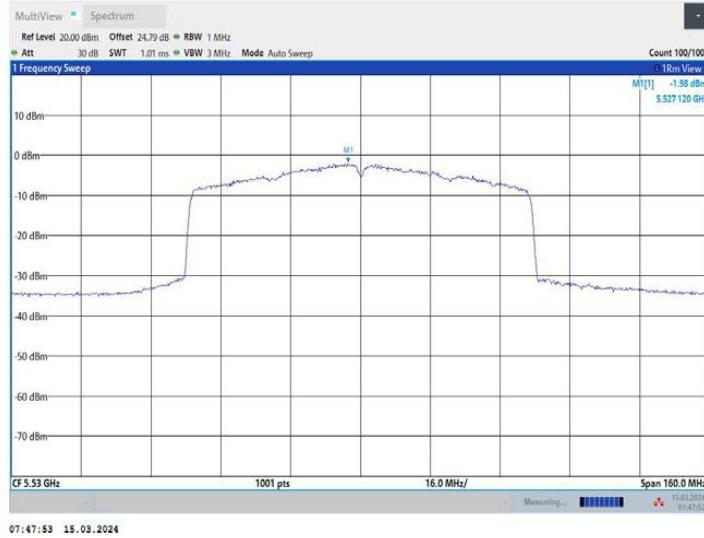


11AX80MIMO\_Ant2\_5530

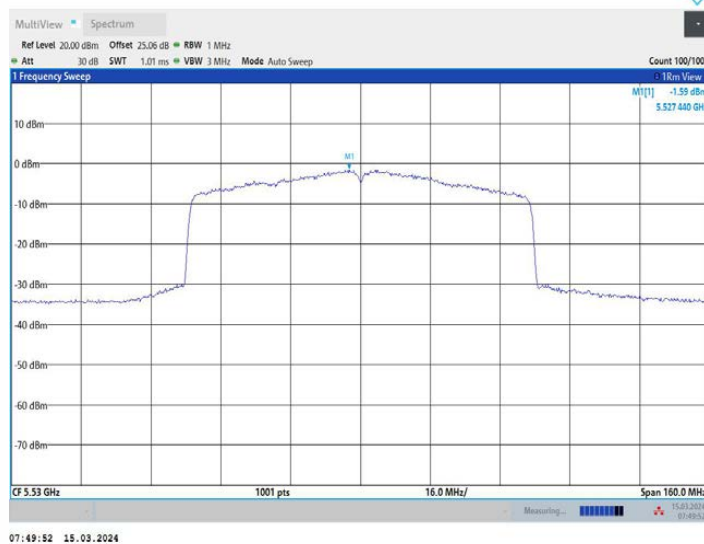


11AX80MIMO\_Ant3\_5530

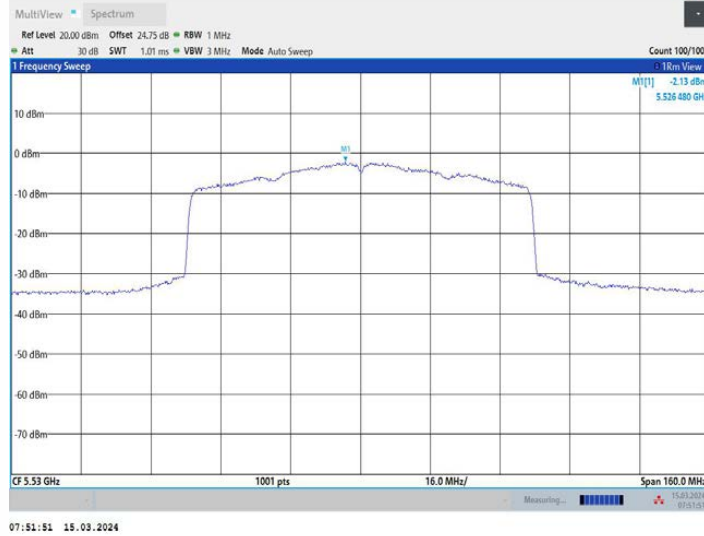


11AX80MIMO\_Ant1\_5610

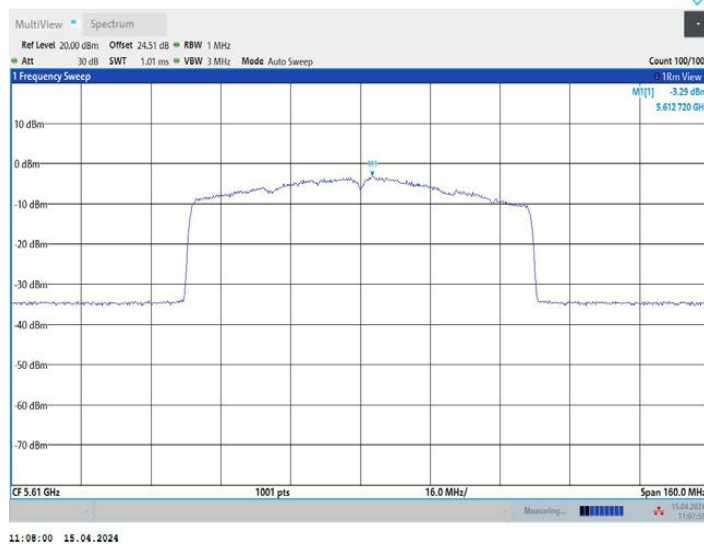


11AX80MIMO\_Ant2\_5610

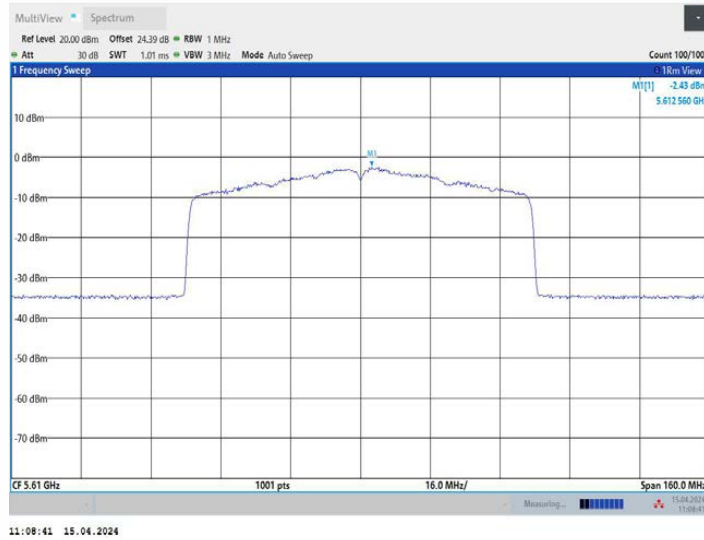


11AX80MIMO\_Ant3\_5610

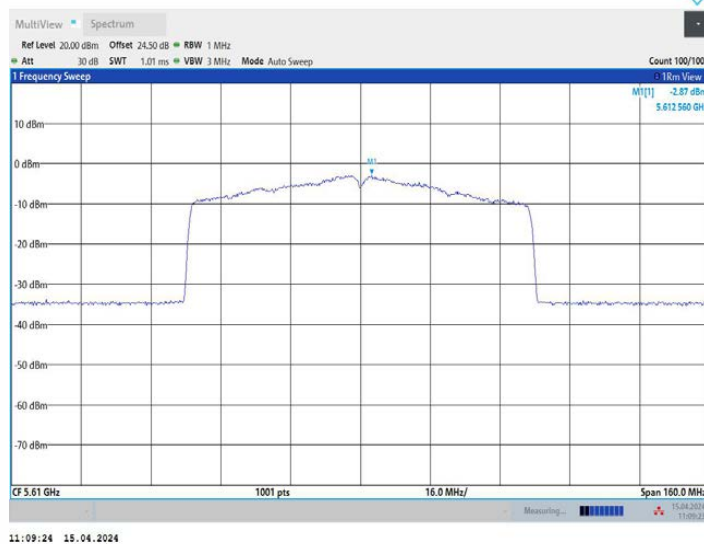

11AX80MIMO\_Ant1\_5775

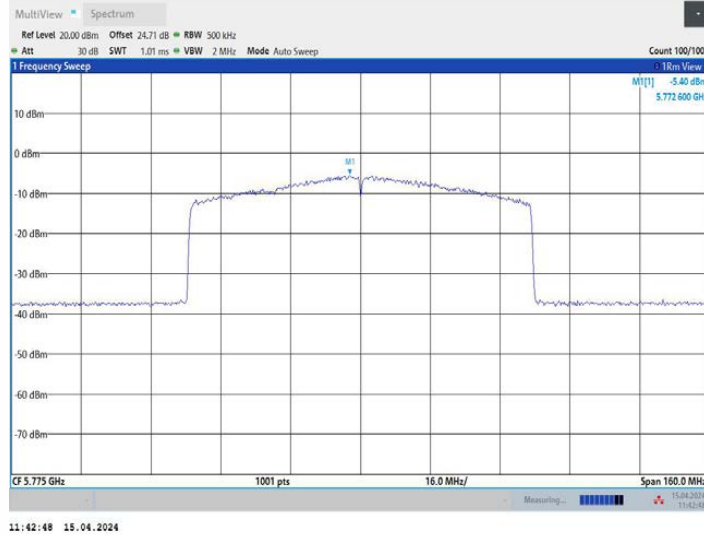


11AX80MIMO\_Ant2\_5775

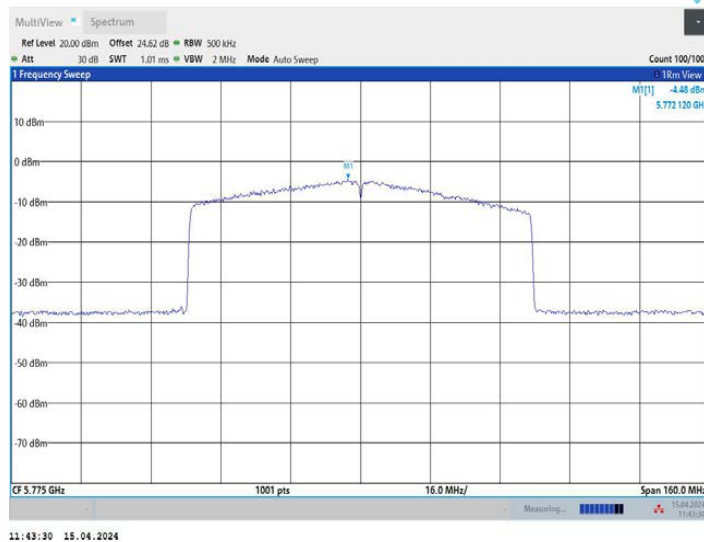


11AX80MIMO\_Ant3\_5775




11AX160MIMO\_Ant1\_5250\_UNII-1

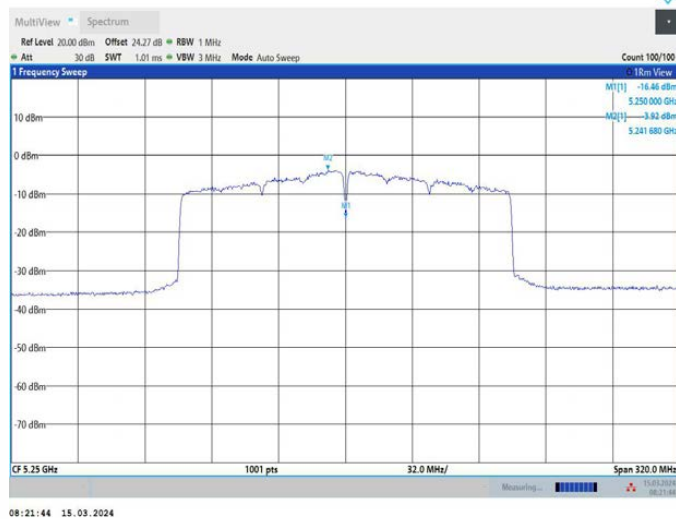


11AX160MIMO\_Ant2\_5250\_UNII-1

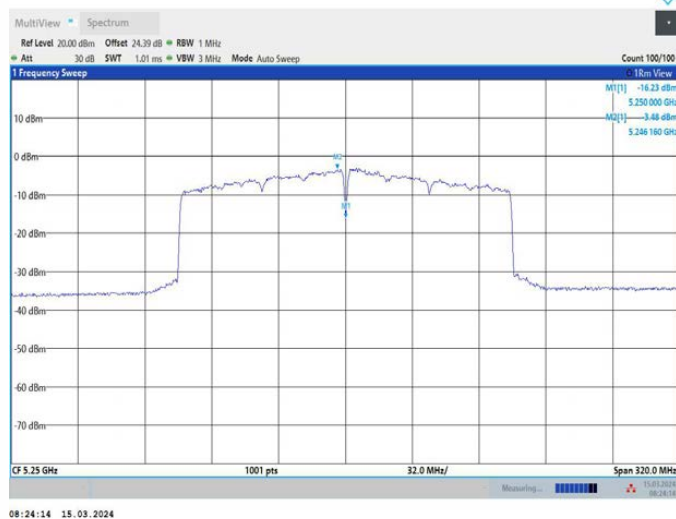


## 11AX160MIMO\_Ant3\_5250\_UNII-1

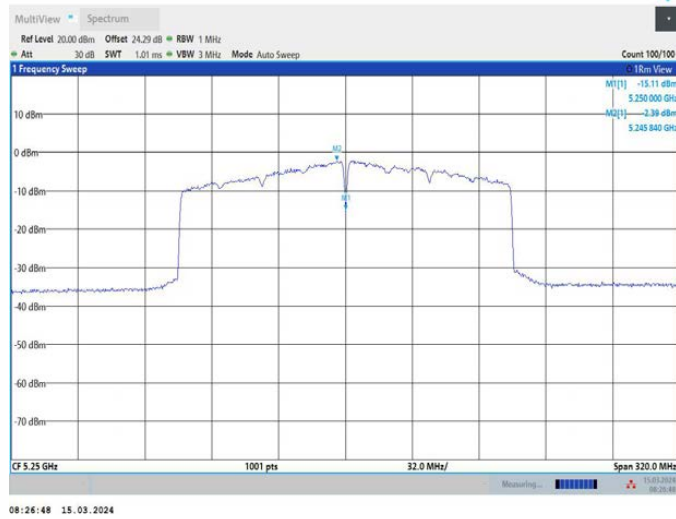


## 11AX160MIMO\_Ant1\_5250\_UNII-2A

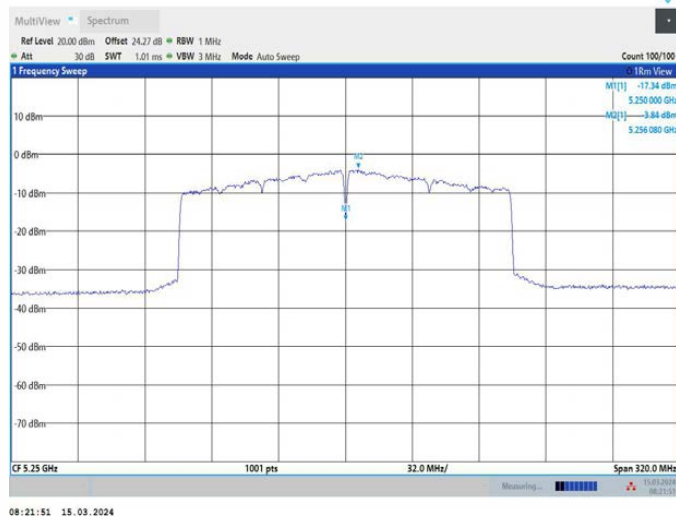


## 11AX160MIMO\_Ant2\_5250\_UNII-2A

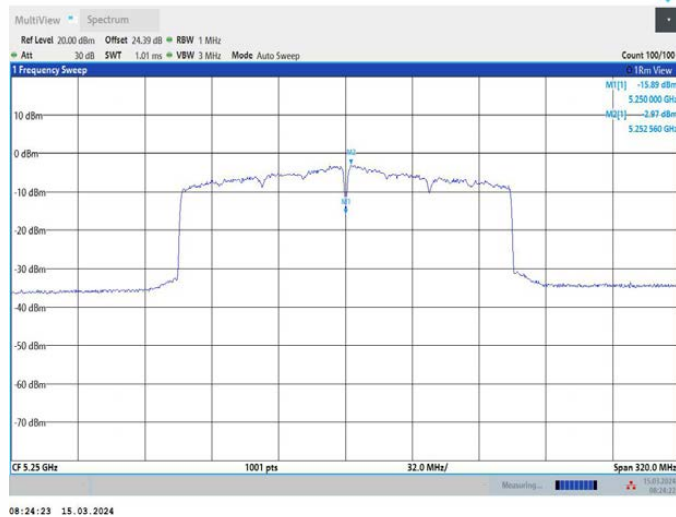


## 11AX160MIMO\_Ant3\_5250\_UNII-2A

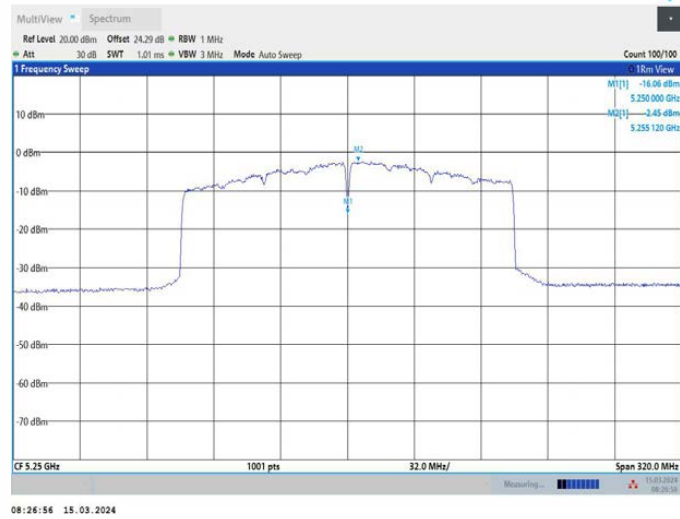


## 11AX160MIMO\_Ant1\_5570

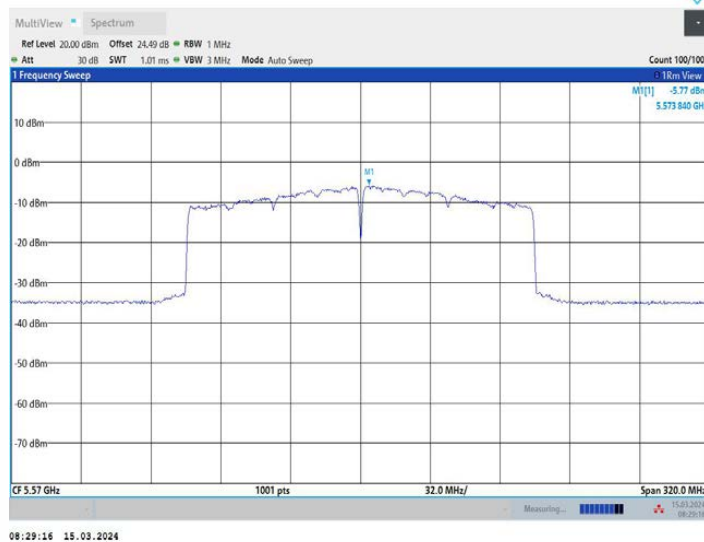

## 11AX160MIMO\_Ant2\_5570

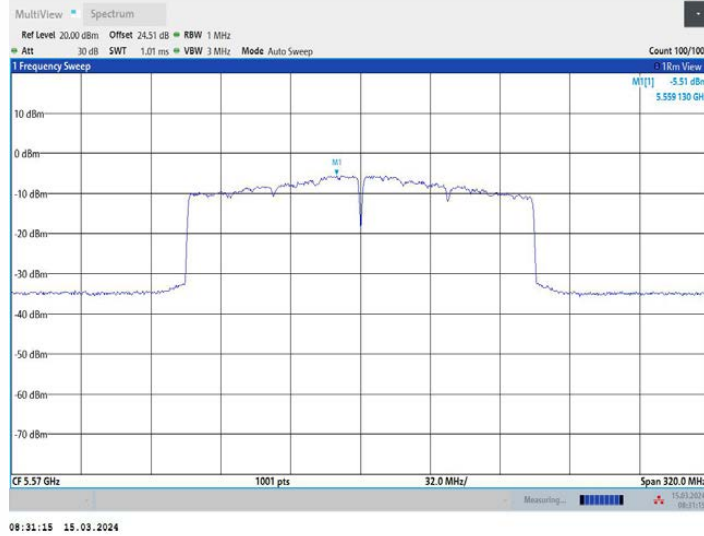

11AX160MIMO\_Ant3\_5570

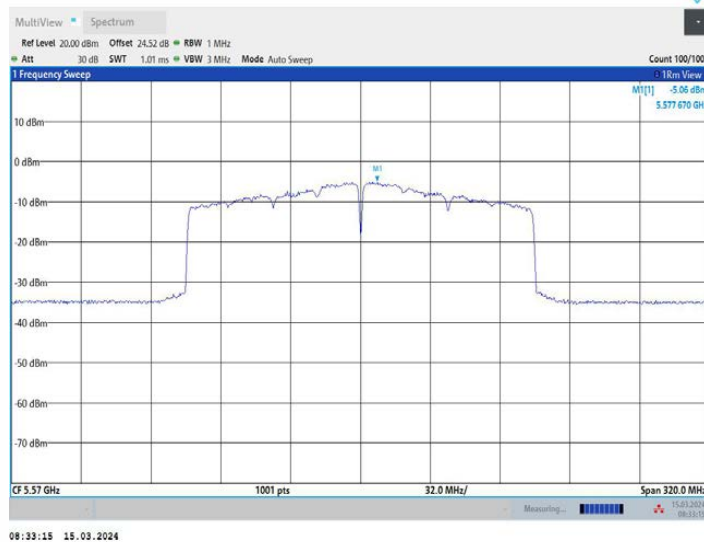

## 8.4 UNDESIRABLE RADIATED SPURIOUS EMISSION

### 8.4.1 Applicable Standard

According to FCC Part 15.407 (b)  
According to 789033 D02 Section II(G)

### 8.4.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

| Restricted Frequency(MHz) | Field Strength ( $\mu\text{V/m}$ ) | Field Strength (dB $\mu\text{V/m}$ ) | Measurement Distance |
|---------------------------|------------------------------------|--------------------------------------|----------------------|
| 0.009-0.490               | 2400/F(KHz)                        | 20 log ( $\mu\text{V/m}$ )           | 300                  |
| 0.490-1.705               | 2400/F(KHz)                        | 20 log ( $\mu\text{V/m}$ )           | 30                   |
| 1.705-30                  | 30                                 | 29.5                                 | 30                   |
| 30-88                     | 100                                | 40                                   | 3                    |
| 88-216                    | 150                                | 43.5                                 | 3                    |
| 216-960                   | 200                                | 46                                   | 3                    |
| Above 960                 | 500                                | 54                                   | 3                    |

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
  2. Measurement was performed at an antenna to the closed point of EUT distance of     meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205, and the emissions located in restricted bands also comply with 15.209 limit.

#### 8.4.3 Test Configuration

Test according to clause 6.2 radio frequency test setup 2.

#### 8.4.4 Test Procedure

##### ■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for  $f < 1$  GHz(30MHz to 1GHz), 200Hz for  $f < 150$ KHz(9KHz to 150KHz), 9KHz for  $f < 30$ MHz (150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

##### ■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW  $\geq$  3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

##### ■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle  $\geq$  98 percent, set VBW RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is < 98 percent, set VBW  $\geq$  1/T, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged).

#### ■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

#### Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

### 8.4.5 Test Results

#### Pass

|               |      |                |           |
|---------------|------|----------------|-----------|
| Temperature : | 25°C | ATM Pressure:  | 1011 mbar |
| Humidity :    | 60 % | Test Engineer: | CZF       |

All of the configurations or modes are tested, the data of the worst case is recorded as below.

☒ For Undesirable radiated Spurious Emission in U-NII – 1

☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All of the configurations or modes are tested, the data of the worst case is recorded in the report.

Highest gain of each antenna and highest output power is ANT3 and MIMO as below:

ANT3:

Test mode: 802.11N(20) Frequency(MHz): 5180

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Over(dB) |
|----------------|-----------------|----------------------------|------------------|-------------|----------|
| 11392.1        | V               | 59.75                      | -35.48           | -27         | 8.48     |
| 14249.6        | V               | 61.47                      | -33.76           | -27         | 6.76     |
| 17515.2        | V               | 65.61                      | -29.62           | -27         | 2.62     |
| 10677.8        | H               | 59.12                      | -36.11           | -27         | 9.11     |
| 13764.8        | H               | 60.86                      | -34.37           | -27         | 7.37     |
| 17489.7        | H               | 66.16                      | -29.07           | -27         | 2.07     |

Test mode: 802.11N(20) Frequency(MHz): 5200

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Over(dB) |
|----------------|-----------------|----------------------------|------------------|-------------|----------|
| 10677.8        | V               | 59.21                      | -36.02           | -27         | 9.02     |
| 14521.7        | V               | 62.87                      | -32.36           | -27         | 5.36     |
| 17515.2        | V               | 65.84                      | -29.39           | -27         | 2.39     |
| 11485.7        | H               | 59.69                      | -35.54           | -27         | 8.54     |
| 14598.2        | H               | 61.60                      | -33.63           | -27         | 6.63     |
| 17489.7        | H               | 66.49                      | -28.74           | -27         | 1.74     |

Test mode: 802.11N(20) Frequency(MHz): 5240

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Over(dB) |
|----------------|-----------------|----------------------------|------------------|-------------|----------|
| 10677.8        | V               | 58.83                      | -36.4            | -27         | 9.4      |
| 13781.8        | V               | 61.15                      | -34.08           | -27         | 7.08     |
| 17489.7        | V               | 66.08                      | -29.15           | -27         | 2.15     |
| 8024.51        | H               | 54.56                      | -40.67           | -27         | 13.67    |
| 11400.7        | H               | 59.86                      | -35.37           | -27         | 8.37     |
| 17489.7        | H               | 66.38                      | -28.85           | -27         | 1.85     |

MIMO:

| Test mode: 802.11N(20) Frequency(MHz): 5180 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 11390.71                                    | V            | 59.62                   | -35.61        | -27         | 8.61     |
| 14248.21                                    | V            | 61.31                   | -33.92        | -27         | 6.92     |
| 17516.48                                    | V            | 65.58                   | -29.65        | -27         | 2.65     |
| 10689.49                                    | H            | 59.04                   | -36.19        | -27         | 9.19     |
| 13776.49                                    | H            | 60.65                   | -34.58        | -27         | 7.58     |
| 17501.39                                    | H            | 66                      | -29.23        | -27         | 2.23     |

| Test mode: 802.11N(20) Frequency(MHz): 5200 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 10676.41                                    | V            | 59.08                   | -36.15        | -27         | 9.15     |
| 14520.31                                    | V            | 62.71                   | -32.52        | -27         | 5.52     |
| 17516.48                                    | V            | 65.81                   | -29.42        | -27         | 2.42     |
| 11497.39                                    | H            | 59.61                   | -35.62        | -27         | 8.62     |
| 14609.89                                    | H            | 61.39                   | -33.84        | -27         | 6.84     |
| 17501.39                                    | H            | 66.33                   | -28.90        | -27         | 1.90     |

| Test mode: 802.11N(20) Frequency(MHz): 5240 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 10676.41                                    | V            | 58.7                    | -36.53        | -27         | 9.53     |
| 13780.41                                    | V            | 60.99                   | -34.24        | -27         | 7.24     |
| 17490.98                                    | V            | 66.05                   | -29.18        | -27         | 2.18     |
| 8036.20                                     | H            | 54.48                   | -40.75        | -27         | 13.75    |
| 11412.39                                    | H            | 59.65                   | -35.58        | -27         | 8.58     |
| 17501.39                                    | H            | 66.22                   | -29.01        | -27         | 2.01     |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
d is the measurement distance in 3 meters

## ANT3:

| Test mode: 802.11N(20) |          | Frequency(MHz): 5180      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 11392.1                | V        | 59.75                     | 74.00               | 14.25    | peak     |
| 14249.6                | V        | 61.47                     | 74.00               | 12.53    | peak     |
| 17515.2                | V        | 65.61                     | 74.00               | 8.39     | peak     |
| 11392.19               | V        | 40.45                     | 54.00               | 13.55    | AVG      |
| 14249.62               | V        | 41.65                     | 54.00               | 12.35    | AVG      |
| 17515.25               | V        | 43.63                     | 54.00               | 10.37    | AVG      |
| 10677.8                | H        | 59.12                     | 74.00               | 14.88    | peak     |
| 13764.8                | H        | 60.86                     | 74.00               | 13.14    | peak     |
| 17489.7                | H        | 66.16                     | 74.00               | 7.84     | peak     |
| 10677.83               | H        | 41.72                     | 54.00               | 12.28    | AVG      |
| 13764.88               | H        | 39.72                     | 54.00               | 14.28    | AVG      |
| 17489.74               | H        | 43.47                     | 54.00               | 10.53    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5200      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10677.8                | V        | 59.21                     | 74.00               | 14.79    | peak     |
| 14521.7                | V        | 62.87                     | 74.00               | 11.13    | peak     |
| 17515.2                | V        | 65.84                     | 74.00               | 8.16     | peak     |
| 10677.83               | V        | 42.53                     | 54.00               | 11.47    | AVG      |
| 14521.76               | V        | 43.05                     | 54.00               | 10.95    | AVG      |
| 17515.25               | V        | 43.96                     | 54.00               | 10.04    | AVG      |
| 11485.7                | H        | 59.69                     | 74.00               | 14.31    | peak     |
| 14598.2                | H        | 61.60                     | 74.00               | 12.40    | peak     |
| 17489.7                | H        | 66.49                     | 74.00               | 7.51     | peak     |
| 11485.74               | H        | 40.96                     | 54.00               | 13.04    | AVG      |
| 14598.29               | H        | 43.73                     | 54.00               | 10.27    | AVG      |
| 17489.74               | H        | 43.64                     | 54.00               | 10.36    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5240      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10677.8                | V        | 58.83                     | 74.00               | 15.17    | peak     |
| 13781.8                | V        | 61.15                     | 74.00               | 12.85    | peak     |
| 17489.7                | V        | 66.08                     | 74.00               | 7.92     | peak     |
| 10677.83               | V        | 42.99                     | 54.00               | 11.01    | AVG      |
| 13781.89               | V        | 39.93                     | 54.00               | 14.07    | AVG      |
| 17489.74               | V        | 43.52                     | 54.00               | 10.48    | AVG      |
| 8024.51                | H        | 54.56                     | 74.00               | 19.44    | peak     |
| 11400.7                | H        | 59.86                     | 74.00               | 14.14    | peak     |
| 17489.7                | H        | 66.38                     | 74.00               | 7.62     | peak     |
| 8024.51                | H        | 34.27                     | 54.00               | 19.73    | AVG      |
| 11400.70               | H        | 37.67                     | 54.00               | 16.33    | AVG      |
| 17489.74               | H        | 43.83                     | 54.00               | 10.17    | AVG      |

MIMO:

| Test mode: 802.11N(20) |          | Frequency(MHz): 5180      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 11390.710              | V        | 59.62                     | 74.00               | 14.38    | peak     |
| 14248.210              | V        | 61.31                     | 74.00               | 12.69    | peak     |
| 17516.480              | V        | 65.58                     | 74.00               | 8.42     | peak     |
| 11393.470              | V        | 40.43                     | 54.00               | 13.57    | AVG      |
| 14247.370              | V        | 41.39                     | 54.00               | 12.61    | AVG      |
| 17513.000              | V        | 43.44                     | 54.00               | 10.56    | AVG      |
| 10689.490              | H        | 59.04                     | 74.00               | 14.96    | peak     |
| 13776.490              | H        | 60.65                     | 74.00               | 13.35    | peak     |
| 17501.390              | H        | 66                        | 74.00               | 8        | peak     |
| 10689.520              | H        | 41.58                     | 54.00               | 12.42    | AVG      |
| 13761.570              | H        | 39.54                     | 54.00               | 14.46    | AVG      |
| 17486.430              | H        | 43.34                     | 54.00               | 10.66    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5200      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10676.410              | V        | 59.08                     | 74.00               | 14.92    | peak     |
| 14520.310              | V        | 62.71                     | 74.00               | 11.29    | peak     |
| 17516.480              | V        | 65.81                     | 74.00               | 8.19     | peak     |
| 10679.110              | V        | 42.51                     | 54.00               | 11.49    | AVG      |
| 14519.510              | V        | 42.79                     | 54.00               | 11.21    | AVG      |
| 17513.000              | V        | 43.77                     | 54.00               | 10.23    | AVG      |
| 11497.390              | H        | 59.61                     | 74.00               | 14.39    | peak     |
| 14609.890              | H        | 61.39                     | 74.00               | 12.61    | peak     |
| 17501.390              | H        | 66.33                     | 74.00               | 7.67     | peak     |
| 11497.430              | H        | 40.82                     | 54.00               | 13.18    | AVG      |
| 14594.980              | H        | 43.55                     | 54.00               | 10.45    | AVG      |
| 17486.430              | H        | 43.51                     | 54.00               | 10.49    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5240      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10676.410              | V        | 58.7                      | 74.00               | 15.3     | peak     |
| 13780.410              | V        | 60.99                     | 74.00               | 13.01    | peak     |
| 17490.980              | V        | 66.05                     | 74.00               | 7.95     | peak     |
| 10679.110              | V        | 42.97                     | 54.00               | 11.03    | AVG      |
| 13779.640              | V        | 39.67                     | 54.00               | 14.33    | AVG      |
| 17487.490              | V        | 43.33                     | 54.00               | 10.67    | AVG      |
| 8036.200               | H        | 54.48                     | 74.00               | 19.52    | peak     |
| 11412.390              | H        | 59.65                     | 74.00               | 14.35    | peak     |
| 17501.390              | H        | 66.22                     | 74.00               | 7.78     | peak     |
| 8036.200               | H        | 34.13                     | 54.00               | 19.87    | AVG      |
| 11397.390              | H        | 37.49                     | 54.00               | 16.51    | AVG      |
| 17486.430              | H        | 43.7                      | 54.00               | 10.3     | AVG      |

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11ax(20) Frequency(MHz): 5180

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(RBW=100KHz)<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Verdict |
|----------------|-----------------|--------------------------------------------|------------------|-------------|---------|
| 5003.66        | H               | 55.02                                      | -40.21           | -27         | Pass    |
| 5008.86        | V               | 55.05                                      | -40.18           | -27         | Pass    |

Test mode: 802.11ax(20) Frequency(MHz): 5240

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(RBW=100KHz)<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Verdict |
|----------------|-----------------|--------------------------------------------|------------------|-------------|---------|
| 5415.61        | H               | 55.18                                      | -40.05           | -27         | Pass    |
| 5425.41        | V               | 54.24                                      | -40.99           | -27         | Pass    |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Test mode: 802.11ax(20) Frequency(MHz): 5180


| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
|----------------|----------|---------------------------|---------------------|----------|----------|
| 5008.86        | V        | 55.05                     | 74.00               | 18.95    | peak     |
| 5008.86        | V        | 43.83                     | 54.00               | 10.17    | AVG      |
| 5003.66        | H        | 55.02                     | 74.00               | 18.98    | peak     |
| 5003.66        | H        | 42.74                     | 54.00               | 11.26    | AVG      |

Test mode: 802.11ax(20) Frequency(MHz): 5240


| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
|----------------|----------|---------------------------|---------------------|----------|----------|
| 5425.41        | V        | 54.24                     | 74.00               | 19.76    | peak     |
| 5425.41        | V        | 44.16                     | 54.00               | 9.84     | AVG      |
| 5415.61        | H        | 55.18                     | 74.00               | 18.82    | peak     |
| 5415.61        | H        | 43.06                     | 54.00               | 10.94    | AVG      |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model U-NII - 1  
Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)  
☐ 802.11a ☒ 802.11ax(HT20) ☐ 802.11n(HT40)  
☒ 5180 ☐ 5200 ☐ 5240 Ant.Pol H

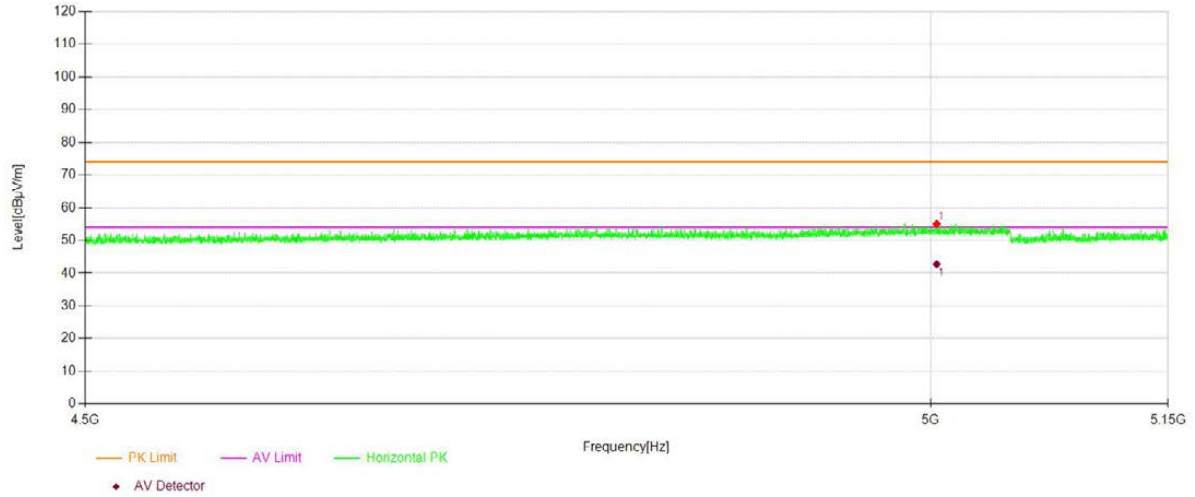


Test Model U-NII - 1  
Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)  
☐ 802.11a ☒ 802.11ax(HT20) ☐ 802.11n(HT40)  
☒ 5180 ☐ 5200 ☐ 5240 Ant.Pol V

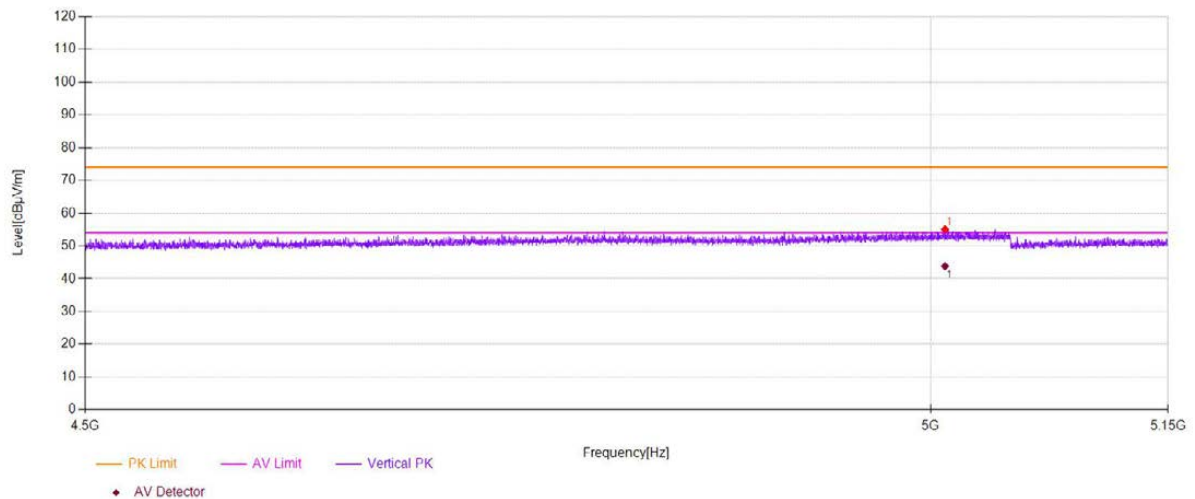

Test Model U-NII - 1  
Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz )  
☐ 802.11a ☒ 802.11 ax(HT20) ☐ 802.11n(HT40)  
☐ 5180 ☐ 5200 ☒ 5240 Ant.Pol H

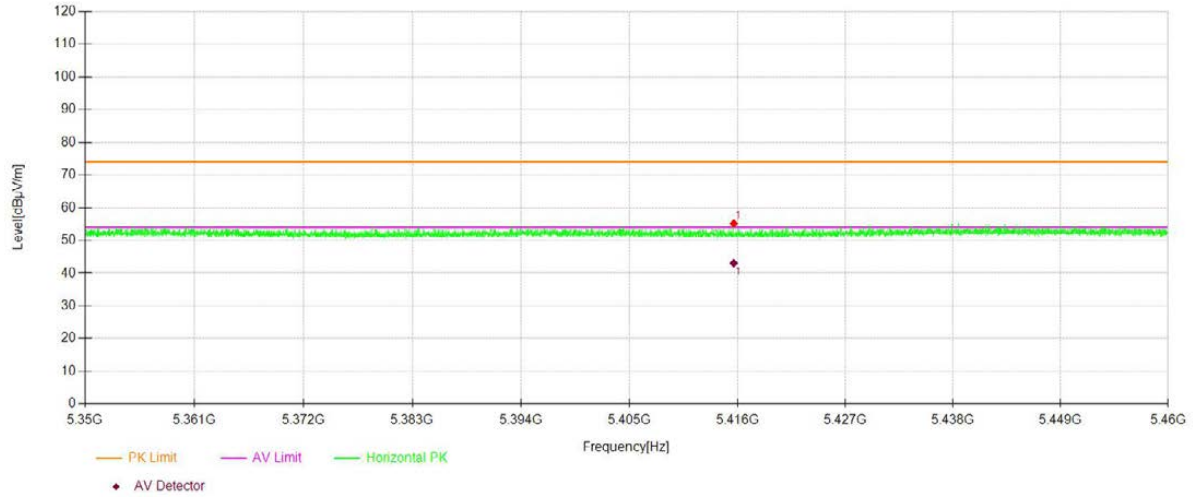

Test Model U-NII - 1  
Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz )  
☐ 802.11a ☒ 802.11 ax(HT20) ☐ 802.11n(HT40)  
☐ 5180 ☐ 5200 ☒ 5240 Ant.Pol V

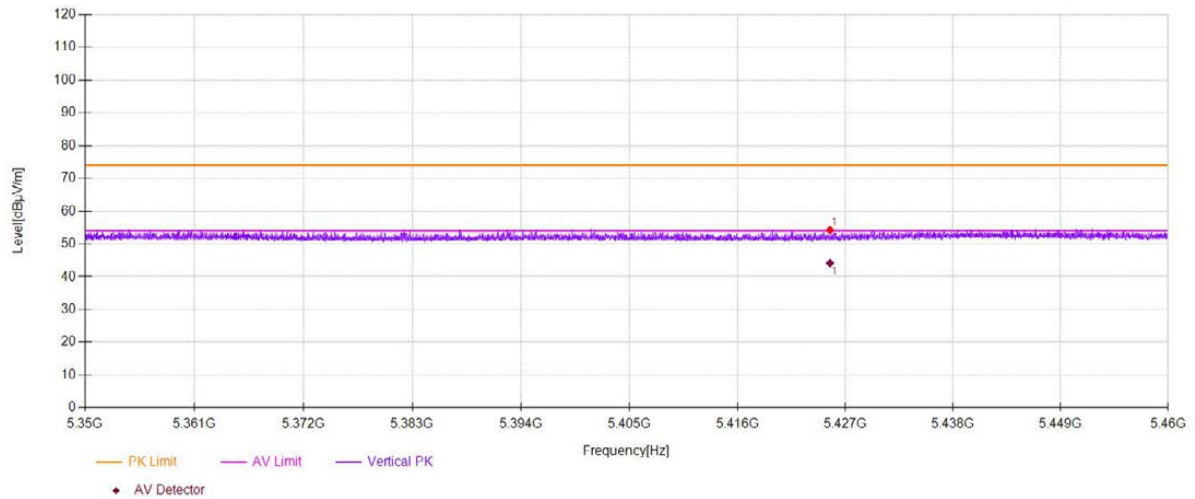

☒ For Undesirable radiated Spurious Emission in U-NII -2A

☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All of the configurations or modes are tested, the data of the worst case is recorded in the report.

Highest gain of each antenna and highest output power is ANT3 and MIMO as below:

ANT3:

| Test mode:     |                 | 802.11N(20)                |                  | Frequency(MHz): |          | 5260 |  |
|----------------|-----------------|----------------------------|------------------|-----------------|----------|------|--|
| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm)     | Over(dB) |      |  |
| 9810.40        | V               | 57.69                      | -37.54           | -27             | 10.54    |      |  |
| 14062.5        | V               | 60.32                      | -34.91           | -27             | 7.91     |      |  |
| 17489.7        | V               | 65.86                      | -29.37           | -27             | 2.37     |      |  |
| 8900.45        | H               | 57.29                      | -37.94           | -27             | 10.94    |      |  |
| 12523.2        | H               | 58.99                      | -36.24           | -27             | 9.24     |      |  |
| 17498.2        | H               | 66.01                      | -29.22           | -27             | 2.22     |      |  |

| Test mode:     |                 | 802.11N(20)                |                  | Frequency(MHz): |          | 5280 |  |
|----------------|-----------------|----------------------------|------------------|-----------------|----------|------|--|
| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm)     | Over(dB) |      |  |
| 8883.44        | V               | 56.71                      | -38.52           | -27             | 11.52    |      |  |
| 13212.1        | V               | 60.21                      | -35.02           | -27             | 8.02     |      |  |
| 17498.2        | V               | 66.57                      | -28.66           | -27             | 1.66     |      |  |
| 12115.0        | H               | 58.39                      | -36.84           | -27             | 9.84     |      |  |
| 14555.7        | H               | 61.88                      | -33.35           | -27             | 6.35     |      |  |
| 17498.2        | H               | 65.96                      | -29.27           | -27             | 2.27     |      |  |

| Test mode:     |                 | 802.11N(20)                |                  | Frequency(MHz): |          | 5320 |  |
|----------------|-----------------|----------------------------|------------------|-----------------|----------|------|--|
| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm)     | Over(dB) |      |  |
| 9504.25        | V               | 56.05                      | -39.18           | -27             | 12.18    |      |  |
| 12429.7        | V               | 59.13                      | -36.1            | -27             | 9.1      |      |  |
| 17498.2        | V               | 66.53                      | -28.7            | -27             | 1.7      |      |  |
| 11545.2        | H               | 59.76                      | -35.47           | -27             | 8.47     |      |  |
| 16460.7        | H               | 61.53                      | -33.7            | -27             | 6.7      |      |  |
| 17498.2        | H               | 66.72                      | -28.51           | -27             | 1.51     |      |  |

MIMO:

| Test mode: 802.11N(20) Frequency(MHz): 5260 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 9809.01                                     | V            | 57.56                   | -37.67        | -27         | 10.67    |
| 14061.11                                    | V            | 60.16                   | -35.07        | -27         | 8.07     |
| 17490.98                                    | V            | 65.83                   | -29.40        | -27         | 2.40     |
| 8912.14                                     | H            | 57.21                   | -38.02        | -27         | 11.02    |
| 12534.89                                    | H            | 58.78                   | -36.45        | -27         | 9.45     |
| 17509.89                                    | H            | 65.85                   | -29.38        | -27         | 2.38     |

| Test mode: 802.11N(20) Frequency(MHz): 5280 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 8882.05                                     | V            | 56.58                   | -38.65        | -27         | 11.65    |
| 13210.71                                    | V            | 60.05                   | -35.18        | -27         | 8.18     |
| 17499.48                                    | V            | 66.54                   | -28.69        | -27         | 1.69     |
| 12126.69                                    | H            | 58.31                   | -36.92        | -27         | 9.92     |
| 14567.39                                    | H            | 61.67                   | -33.56        | -27         | 6.56     |
| 17509.89                                    | H            | 65.8                    | -29.43        | -27         | 2.43     |

| Test mode: 802.11N(20) Frequency(MHz): 5320 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 9502.86                                     | V            | 55.92                   | -39.31        | -27         | 12.31    |
| 12428.31                                    | V            | 58.97                   | -36.26        | -27         | 9.26     |
| 17499.48                                    | V            | 66.5                    | -28.73        | -27         | 1.73     |
| 11556.89                                    | H            | 59.68                   | -35.55        | -27         | 8.55     |
| 16472.39                                    | H            | 61.32                   | -33.91        | -27         | 6.91     |
| 17509.89                                    | H            | 66.56                   | -28.67        | -27         | 1.67     |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
d is the measurement distance in 3 meters

ANT3:

| Test mode: 802.11N(20) |          | Frequency(MHz): 5260      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 9810.40                | V        | 57.69                     | 74.00               | 16.31    | peak     |
| 14062.5                | V        | 60.32                     | 74.00               | 13.68    | peak     |
| 17489.7                | V        | 65.86                     | 74.00               | 8.14     | peak     |
| 9810.405               | V        | 37.64                     | 54.00               | 16.36    | AVG      |
| 14062.53               | V        | 40.57                     | 54.00               | 13.43    | AVG      |
| 17489.74               | V        | 43.45                     | 54.00               | 10.55    | AVG      |
| 8900.45                | H        | 57.29                     | 74.00               | 16.71    | peak     |
| 12523.2                | H        | 58.99                     | 74.00               | 15.01    | peak     |
| 17498.2                | H        | 66.01                     | 74.00               | 7.99     | peak     |
| 8900.450               | H        | 37.23                     | 54.00               | 16.77    | AVG      |
| 12523.26               | H        | 40.13                     | 54.00               | 13.87    | AVG      |
| 17498.24               | H        | 44.46                     | 54.00               | 9.54     | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5280      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 8883.44                | V        | 56.71                     | 74.00               | 17.29    | peak     |
| 13212.1                | V        | 60.21                     | 74.00               | 13.79    | peak     |
| 17498.2                | V        | 66.57                     | 74.00               | 7.43     | peak     |
| 8883.441               | V        | 36.63                     | 54.00               | 17.37    | AVG      |
| 13212.10               | V        | 40.51                     | 54.00               | 13.49    | AVG      |
| 17498.24               | V        | 44.16                     | 54.00               | 9.84     | AVG      |
| 12115.0                | H        | 58.39                     | 74.00               | 15.61    | peak     |
| 14555.7                | H        | 61.88                     | 74.00               | 12.12    | peak     |
| 17498.2                | H        | 65.96                     | 74.00               | 8.04     | peak     |
| 12115.05               | H        | 41.27                     | 54.00               | 12.73    | AVG      |
| 14555.77               | H        | 42.93                     | 54.00               | 11.07    | AVG      |
| 17498.24               | H        | 43.72                     | 54.00               | 10.28    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5320      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 9504.25                | V        | 56.05                     | 74.00               | 17.95    | peak     |
| 12429.7                | V        | 59.13                     | 74.00               | 14.87    | peak     |
| 17498.2                | V        | 66.53                     | 74.00               | 7.47     | peak     |
| 9504.25                | V        | 36.91                     | 54.00               | 17.09    | AVG      |
| 12429.71               | V        | 40.52                     | 54.00               | 13.48    | AVG      |
| 17498.24               | V        | 44.45                     | 54.00               | 9.55     | AVG      |
| 11545.2                | H        | 59.76                     | 74.00               | 14.24    | peak     |
| 16460.7                | H        | 61.53                     | 74.00               | 12.47    | peak     |
| 17498.2                | H        | 66.72                     | 74.00               | 7.28     | peak     |
| 11545.27               | H        | 40.83                     | 54.00               | 13.17    | AVG      |
| 16460.73               | H        | 42.14                     | 54.00               | 11.86    | AVG      |
| 17498.24               | H        | 44.21                     | 54.00               | 9.79     | AVG      |

MIMO:

| Test mode: 802.11N(20) |          | Frequency(MHz): 5260      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 9809.010               | V        | 57.56                     | 74.00               | 16.44    | peak     |
| 14061.110              | V        | 60.16                     | 74.00               | 13.84    | peak     |
| 17490.980              | V        | 65.83                     | 74.00               | 8.17     | peak     |
| 9811.685               | V        | 37.62                     | 54.00               | 16.38    | AVG      |
| 14060.280              | V        | 40.31                     | 54.00               | 13.69    | AVG      |
| 17487.490              | V        | 43.26                     | 54.00               | 10.74    | AVG      |
| 8912.140               | H        | 57.21                     | 74.00               | 16.79    | peak     |
| 12534.890              | H        | 58.78                     | 74.00               | 15.22    | peak     |
| 17509.890              | H        | 65.85                     | 74.00               | 8.15     | peak     |
| 8912.140               | H        | 37.09                     | 54.00               | 16.91    | AVG      |
| 12519.950              | H        | 39.95                     | 54.00               | 14.05    | AVG      |
| 17494.930              | H        | 44.33                     | 54.00               | 9.67     | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5280      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 8882.050               | V        | 56.58                     | 74.00               | 17.42    | peak     |
| 13210.710              | V        | 60.05                     | 74.00               | 13.95    | peak     |
| 17499.480              | V        | 66.54                     | 74.00               | 7.46     | peak     |
| 8884.721               | V        | 36.61                     | 54.00               | 17.39    | AVG      |
| 13209.850              | V        | 40.25                     | 54.00               | 13.75    | AVG      |
| 17495.990              | V        | 43.97                     | 54.00               | 10.03    | AVG      |
| 12126.690              | H        | 58.31                     | 74.00               | 15.69    | peak     |
| 14567.390              | H        | 61.67                     | 74.00               | 12.33    | peak     |
| 17509.890              | H        | 65.8                      | 74.00               | 8.2      | peak     |
| 12126.740              | H        | 41.13                     | 54.00               | 12.87    | AVG      |
| 14552.460              | H        | 42.75                     | 54.00               | 11.25    | AVG      |
| 17494.930              | H        | 43.59                     | 54.00               | 10.41    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5320      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 9502.860               | V        | 55.92                     | 74.00               | 18.08    | peak     |
| 12428.310              | V        | 58.97                     | 74.00               | 15.03    | peak     |
| 17499.480              | V        | 66.5                      | 74.00               | 7.5      | peak     |
| 9505.530               | V        | 36.89                     | 54.00               | 17.11    | AVG      |
| 12427.460              | V        | 40.26                     | 54.00               | 13.74    | AVG      |
| 17495.990              | V        | 44.26                     | 54.00               | 9.74     | AVG      |
| 11556.890              | H        | 59.68                     | 74.00               | 14.32    | peak     |
| 16472.390              | H        | 61.32                     | 74.00               | 12.68    | peak     |
| 17509.890              | H        | 66.56                     | 74.00               | 7.44     | peak     |
| 11556.960              | H        | 40.69                     | 54.00               | 13.31    | AVG      |
| 16457.420              | H        | 41.96                     | 54.00               | 12.04    | AVG      |
| 17494.930              | H        | 44.08                     | 54.00               | 9.92     | AVG      |

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
(3) Correct Factor= Ant\_F + Cab\_L - Preamp  
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11ax(20) Frequency(MHz): 5260

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(RBW=100KHz)<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Verdict |
|----------------|-----------------|--------------------------------------------|------------------|-------------|---------|
| 4979.45        | H               | 55.16                                      | -40.07           | -27         | Pass    |
| 4922.25        | V               | 56.46                                      | -38.77           | -27         | Pass    |

Test mode: 802.11 ax(20) Frequency(MHz): 5320

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(RBW=100KHz)<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Verdict |
|----------------|-----------------|--------------------------------------------|------------------|-------------|---------|
| 5417.89        | H               | 54.91                                      | -40.32           | -27         | Pass    |
| 5361.17        | V               | 54.19                                      | -41.04           | -27         | Pass    |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Test mode: 802.11ax(20) Frequency(MHz): 5260


| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
|----------------|----------|---------------------------|---------------------|----------|----------|
| 4922.25        | V        | 56.46                     | 74.00               | 17.54    | peak     |
| 4922.25        | V        | 43.45                     | 54.00               | 10.55    | AVG      |
| 4979.45        | H        | 55.16                     | 74.00               | 18.84    | peak     |
| 4979.45        | H        | 42.66                     | 54.00               | 11.34    | AVG      |

Test mode: 802.11ax(20) Frequency(MHz): 5320


| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
|----------------|----------|---------------------------|---------------------|----------|----------|
| 5361.17        | V        | 54.19                     | 74.00               | 19.81    | peak     |
| 5361.17        | V        | 44.20                     | 54.00               | 9.80     | AVG      |
| 5417.89        | H        | 54.91                     | 74.00               | 19.09    | peak     |
| 5417.89        | H        | 44.10                     | 54.00               | 9.90     | AVG      |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model U-NII -2A  
Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☒ 5260 ☐ 5300 ☐ 5320 Ant.Pol H

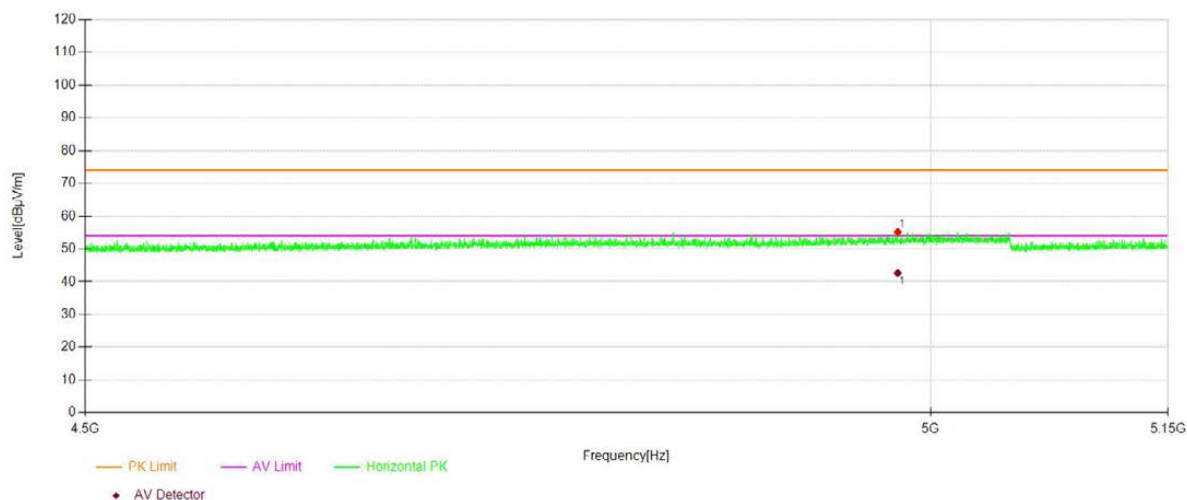


Test Model U-NII -2A  
Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☒ 5260 ☐ 5300 ☐ 5320 Ant.Pol V

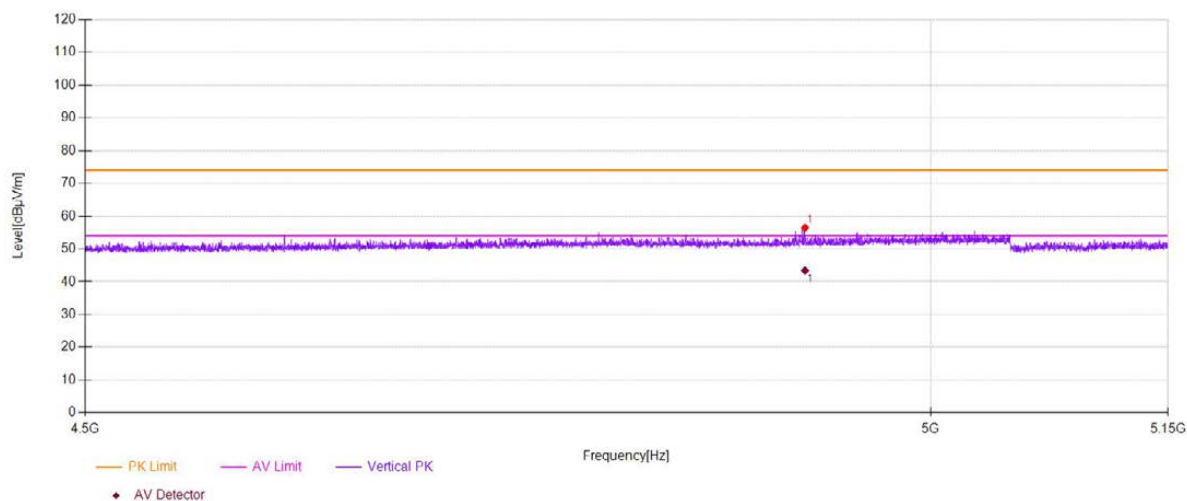

Test Model U-NII -2A  
Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz )  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☐ 5260 ☐ 5300 ☒ 5320 Ant.Pol H

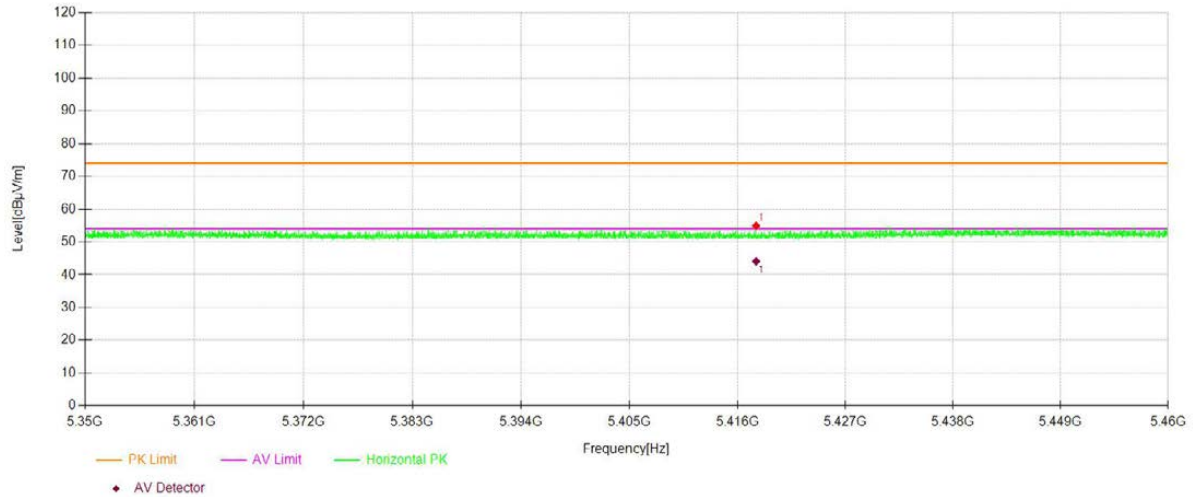

Test Model U-NII -2A  
Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz )  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☐ 5260 ☐ 5300 ☒ 5320 Ant.Pol V

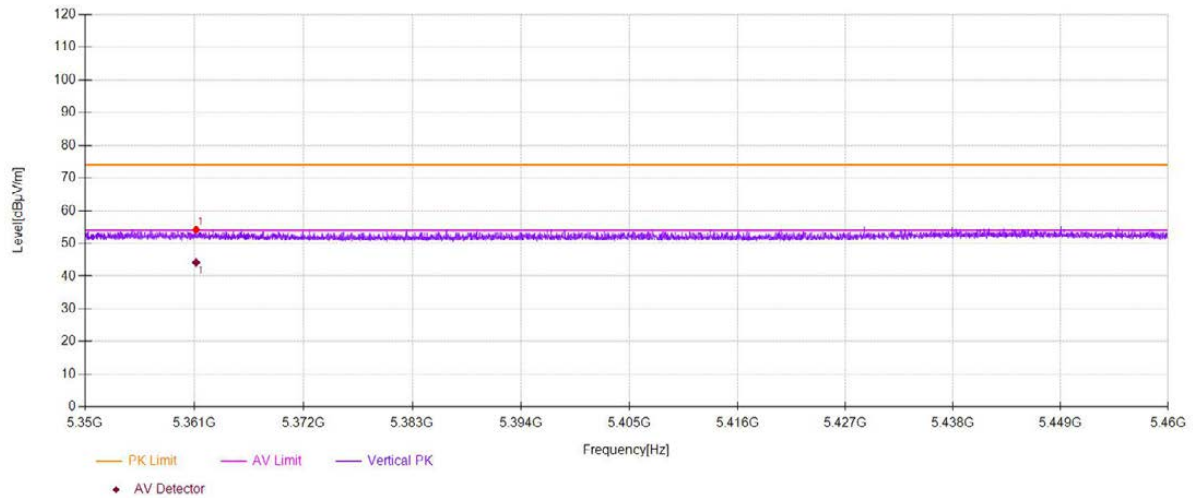

☒ For Undesirable radiated Spurious Emission in U-NII -2C

☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All of the configurations or modes are tested, the data of the worst case is recorded in the report.  
Highest gain of each antenna and highest output power is ANT3 and MIMO as below:

ANT3:

Test mode: 802.11N(20) Frequency(MHz): 5500

| Freq. (MHz) | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
|-------------|--------------|-------------------------|---------------|-------------|----------|
| 10669.3     | V            | 59.85                   | -35.38        | -27         | 8.38     |
| 15168.0     | V            | 62.09                   | -33.14        | -27         | 6.14     |
| 17506.7     | V            | 65.96                   | -29.27        | -27         | 2.27     |
| 11375.1     | H            | 58.96                   | -36.27        | -27         | 9.27     |
| 14632.3     | H            | 61.74                   | -33.49        | -27         | 6.49     |
| 17515.2     | H            | 65.75                   | -29.48        | -27         | 2.48     |

Test mode: 802.11N(20) Frequency(MHz): 5580

| Freq. (MHz) | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
|-------------|--------------|-------------------------|---------------|-------------|----------|
| 9198.09     | V            | 56.67                   | -38.56        | -27         | 11.56    |
| 13790.3     | V            | 60.60                   | -34.63        | -27         | 7.63     |
| 17515.2     | V            | 66.21                   | -29.02        | -27         | 2.02     |
| 11528.2     | H            | 59.35                   | -35.88        | -27         | 8.88     |
| 14241.1     | H            | 61.25                   | -33.98        | -27         | 6.98     |
| 17498.2     | H            | 65.96                   | -29.27        | -27         | 2.27     |

Test mode: 802.11N(20) Frequency(MHz): 5700

| Freq. (MHz) | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
|-------------|--------------|-------------------------|---------------|-------------|----------|
| 12778.3     | V            | 59.22                   | -36.01        | -27         | 9.01     |
| 14649.3     | V            | 62.18                   | -33.05        | -27         | 6.05     |
| 17515.2     | V            | 65.61                   | -29.62        | -27         | 2.62     |
| 9878.43     | H            | 57.83                   | -37.4         | -27         | 10.4     |
| 13144.0     | H            | 59.51                   | -35.72        | -27         | 8.72     |
| 17030.5     | H            | 64.68                   | -30.55        | -27         | 3.55     |

MIMO:

| Test mode: 802.11N(20) Frequency(MHz): 5500 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 10667.91                                    | V            | 59.72                   | -35.51        | -27         | 8.51     |
| 15166.61                                    | V            | 61.93                   | -33.30        | -27         | 6.30     |
| 17507.98                                    | V            | 65.93                   | -29.30        | -27         | 2.30     |
| 11386.79                                    | H            | 58.88                   | -36.35        | -27         | 9.35     |
| 14643.99                                    | H            | 61.53                   | -33.70        | -27         | 6.70     |
| 17526.89                                    | H            | 65.59                   | -29.64        | -27         | 2.64     |

| Test mode: 802.11N(20) Frequency(MHz): 5580 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 9196.70                                     | V            | 56.54                   | -38.69        | -27         | 11.69    |
| 13788.91                                    | V            | 60.44                   | -34.79        | -27         | 7.79     |
| 17516.48                                    | V            | 66.18                   | -29.05        | -27         | 2.05     |
| 11539.89                                    | H            | 59.27                   | -35.96        | -27         | 8.96     |
| 14252.79                                    | H            | 61.04                   | -34.19        | -27         | 7.19     |
| 17509.89                                    | H            | 65.8                    | -29.43        | -27         | 2.43     |

| Test mode: 802.11N(20) Frequency(MHz): 5700 |              |                         |               |             |          |
|---------------------------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)                                 | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 12776.91                                    | V            | 59.09                   | -36.14        | -27         | 9.14     |
| 14647.91                                    | V            | 62.02                   | -33.21        | -27         | 6.21     |
| 17516.48                                    | V            | 65.58                   | -29.65        | -27         | 2.65     |
| 9890.12                                     | H            | 57.75                   | -37.48        | -27         | 10.48    |
| 13155.69                                    | H            | 59.3                    | -35.93        | -27         | 8.93     |
| 17042.19                                    | H            | 64.52                   | -30.71        | -27         | 3.71     |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
d is the measurement distance in 3 meters

## ANT3:

| Test mode: 802.11N(20) |          | Frequency(MHz): 5500      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10669.3                | V        | 59.85                     | 74.00               | 14.15    | peak     |
| 15168.0                | V        | 62.09                     | 74.00               | 11.91    | peak     |
| 17506.7                | V        | 65.96                     | 74.00               | 8.04     | peak     |
| 10669.33               | V        | 41.66                     | 54.00               | 12.34    | AVG      |
| 15168.08               | V        | 41.36                     | 54.00               | 12.64    | AVG      |
| 17506.75               | V        | 44.13                     | 54.00               | 9.87     | AVG      |
| 11375.1                | H        | 58.96                     | 74.00               | 15.04    | peak     |
| 14632.3                | H        | 61.74                     | 74.00               | 12.26    | peak     |
| 17515.2                | H        | 65.75                     | 74.00               | 8.25     | peak     |
| 11375.18               | H        | 40.37                     | 54.00               | 13.63    | AVG      |
| 14632.31               | H        | 42.64                     | 54.00               | 11.36    | AVG      |
| 17515.25               | H        | 44.13                     | 54.00               | 9.87     | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5580      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 9198.09                | V        | 56.67                     | 74.00               | 17.33    | peak     |
| 13790.3                | V        | 60.60                     | 74.00               | 13.40    | peak     |
| 17515.2                | V        | 66.21                     | 74.00               | 7.79     | peak     |
| 9198.099               | V        | 36.59                     | 54.00               | 17.41    | AVG      |
| 13790.39               | V        | 40.64                     | 54.00               | 13.36    | AVG      |
| 17515.25               | V        | 43.67                     | 54.00               | 10.33    | AVG      |
| 11528.2                | H        | 59.35                     | 74.00               | 14.65    | peak     |
| 14241.1                | H        | 61.25                     | 74.00               | 12.75    | peak     |
| 17498.2                | H        | 65.96                     | 74.00               | 8.04     | peak     |
| 11528.26               | H        | 41.17                     | 54.00               | 12.83    | AVG      |
| 14241.12               | H        | 42.13                     | 54.00               | 11.87    | AVG      |
| 17498.24               | H        | 44.16                     | 54.00               | 9.84     | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5700      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 12778.3                | V        | 59.22                     | 74.00               | 14.78    | peak     |
| 14649.3                | V        | 62.18                     | 74.00               | 11.82    | peak     |
| 17515.2                | V        | 65.61                     | 74.00               | 8.39     | peak     |
| 12778.38               | V        | 44.06                     | 54.00               | 9.94     | AVG      |
| 14649.32               | V        | 42.77                     | 54.00               | 11.23    | AVG      |
| 17515.25               | V        | 43.23                     | 54.00               | 10.77    | AVG      |
| 9878.43                | H        | 57.83                     | 74.00               | 16.17    | peak     |
| 13144.0                | H        | 59.51                     | 74.00               | 14.49    | peak     |
| 17030.5                | H        | 64.68                     | 74.00               | 9.32     | peak     |
| 9878.439               | H        | 38.99                     | 54.00               | 15.01    | AVG      |
| 13144.07               | H        | 40.30                     | 54.00               | 13.70    | AVG      |
| 17030.51               | H        | 43.27                     | 54.00               | 10.73    | AVG      |

MIMO:

| Test mode: 802.11N(20) |          | Frequency(MHz): 5500      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10667.910              | V        | 59.72                     | 74.00               | 14.28    | peak     |
| 15166.610              | V        | 61.93                     | 74.00               | 12.07    | peak     |
| 17507.980              | V        | 65.93                     | 74.00               | 8.07     | peak     |
| 10670.610              | V        | 41.64                     | 54.00               | 12.36    | AVG      |
| 15165.830              | V        | 41.1                      | 54.00               | 12.9     | AVG      |
| 17504.500              | V        | 43.94                     | 54.00               | 10.06    | AVG      |
| 11386.790              | H        | 58.88                     | 74.00               | 15.12    | peak     |
| 14643.990              | H        | 61.53                     | 74.00               | 12.47    | peak     |
| 17526.890              | H        | 65.59                     | 74.00               | 8.41     | peak     |
| 11386.870              | H        | 40.23                     | 54.00               | 13.77    | AVG      |
| 14629.000              | H        | 42.46                     | 54.00               | 11.54    | AVG      |
| 17511.940              | H        | 44                        | 54.00               | 10       | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5580      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 9196.700               | V        | 56.54                     | 74.00               | 17.46    | peak     |
| 13788.910              | V        | 60.44                     | 74.00               | 13.56    | peak     |
| 17516.480              | V        | 66.18                     | 74.00               | 7.82     | peak     |
| 9199.379               | V        | 36.57                     | 54.00               | 17.43    | AVG      |
| 13788.140              | V        | 40.38                     | 54.00               | 13.62    | AVG      |
| 17513.000              | V        | 43.48                     | 54.00               | 10.52    | AVG      |
| 11539.890              | H        | 59.27                     | 74.00               | 14.73    | peak     |
| 14252.790              | H        | 61.04                     | 74.00               | 12.96    | peak     |
| 17509.890              | H        | 65.8                      | 74.00               | 8.2      | peak     |
| 11539.950              | H        | 41.03                     | 54.00               | 12.97    | AVG      |
| 14237.810              | H        | 41.95                     | 54.00               | 12.05    | AVG      |
| 17494.930              | H        | 44.03                     | 54.00               | 9.97     | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5700      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 12776.910              | V        | 59.09                     | 74.00               | 14.91    | peak     |
| 14647.910              | V        | 62.02                     | 74.00               | 11.98    | peak     |
| 17516.480              | V        | 65.58                     | 74.00               | 8.42     | peak     |
| 12779.660              | V        | 44.04                     | 54.00               | 9.96     | AVG      |
| 14647.070              | V        | 42.51                     | 54.00               | 11.49    | AVG      |
| 17513.000              | V        | 43.04                     | 54.00               | 10.96    | AVG      |
| 9890.120               | H        | 57.75                     | 74.00               | 16.25    | peak     |
| 13155.690              | H        | 59.3                      | 74.00               | 14.7     | peak     |
| 17042.190              | H        | 64.52                     | 74.00               | 9.48     | peak     |
| 9890.129               | H        | 38.85                     | 54.00               | 15.15    | AVG      |
| 13140.760              | H        | 40.12                     | 54.00               | 13.88    | AVG      |
| 17027.200              | H        | 43.14                     | 54.00               | 10.86    | AVG      |

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11ax(20) Frequency(MHz): 5500

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(RBW=100KHz)<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Verdict |
|----------------|-----------------|--------------------------------------------|------------------|-------------|---------|
| 5460.66        | H               | 54.98                                      | -40.25           | -27         | Pass    |
| 5468.01        | V               | 54.70                                      | -40.53           | -27         | Pass    |

Test mode: 802.11ax(20) Frequency(MHz): 5700

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(RBW=100KHz)<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Verdict |
|----------------|-----------------|--------------------------------------------|------------------|-------------|---------|
| 5728.52        | H               | 55.42                                      | -39.81           | -27         | Pass    |
| 5728.98        | V               | 55.62                                      | -39.61           | -27         | Pass    |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

Test mode: 802.11ax(20) Frequency(MHz): 5500


| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
|----------------|----------|---------------------------|---------------------|----------|----------|
| 5468.01        | V        | 54.70                     | 74.00               | 19.30    | peak     |
| 5468.01        | V        | 44.70                     | 54.00               | 9.30     | AVG      |
| 5460.66        | H        | 54.98                     | 74.00               | 19.02    | peak     |
| 5460.66        | H        | 43.47                     | 54.00               | 10.53    | AVG      |

Test mode: 802.11ax(20) Frequency(MHz): 5700


| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
|----------------|----------|---------------------------|---------------------|----------|----------|
| 5728.98        | V        | 55.62                     | 74.00               | 18.38    | peak     |
| 5728.98        | V        | 44.76                     | 54.00               | 9.24     | AVG      |
| 5728.52        | H        | 55.42                     | 74.00               | 18.58    | peak     |
| 5728.52        | H        | 44.75                     | 54.00               | 9.25     | AVG      |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model U-NII -2C  
Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☒ 5500 ☐ 5580 ☐ 5700 Ant.Pol H

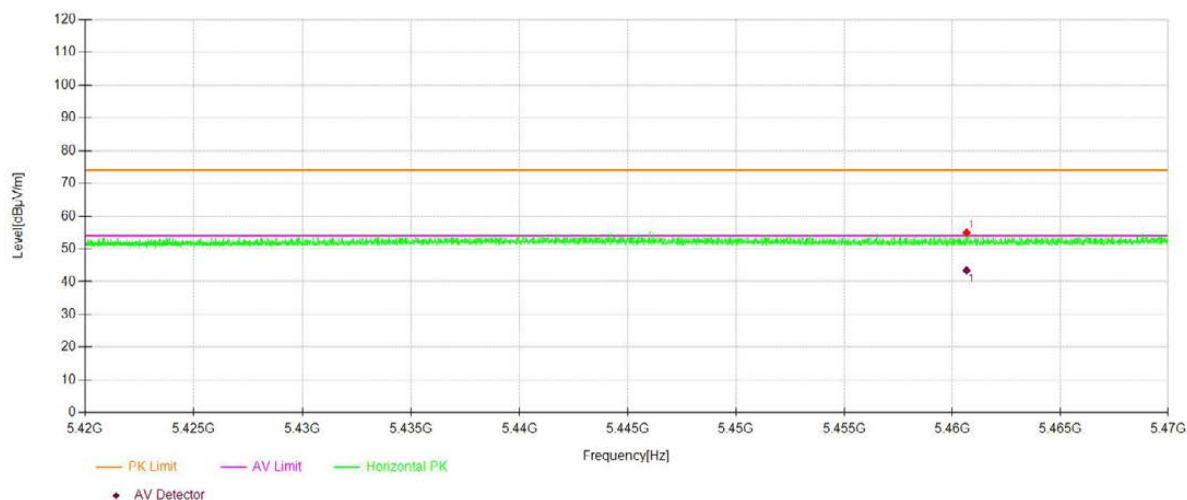


Test Model U-NII -2C  
Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☒ 5500 ☐ 5580 ☐ 5700 Ant.Pol V

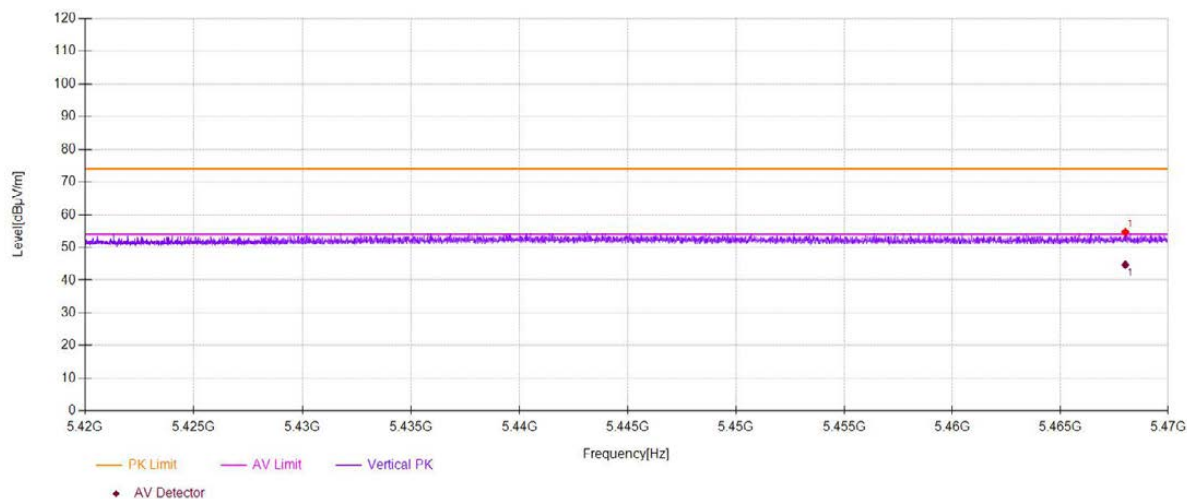

Test Model U-NII -2C  
Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz )  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☐ 5500 ☐ 5580 ☒ 5700 Ant.Pol H

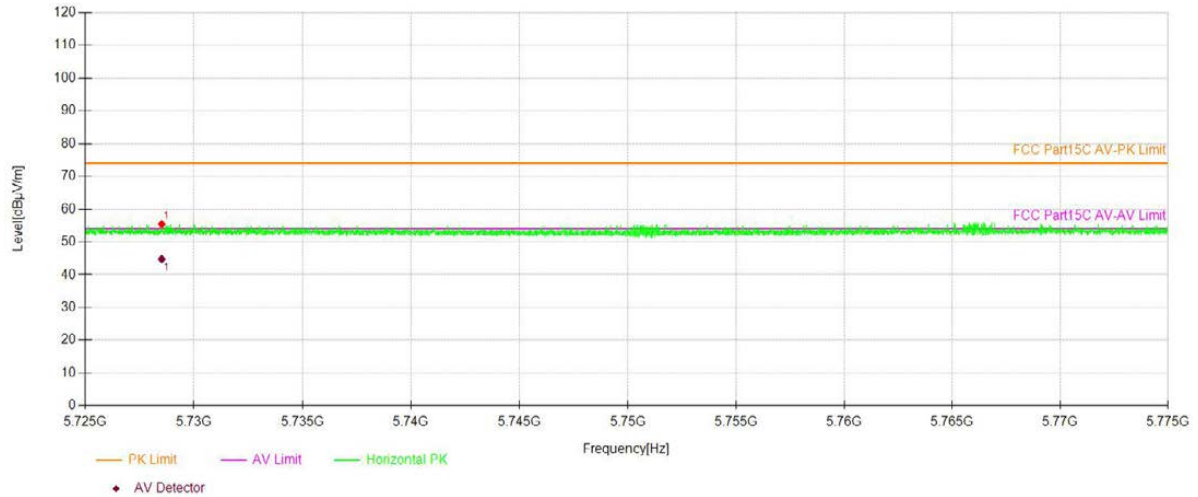

Test Model U-NII -2C  
Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz )  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☐ 5500 ☐ 5580 ☒ 5700 Ant.Pol V

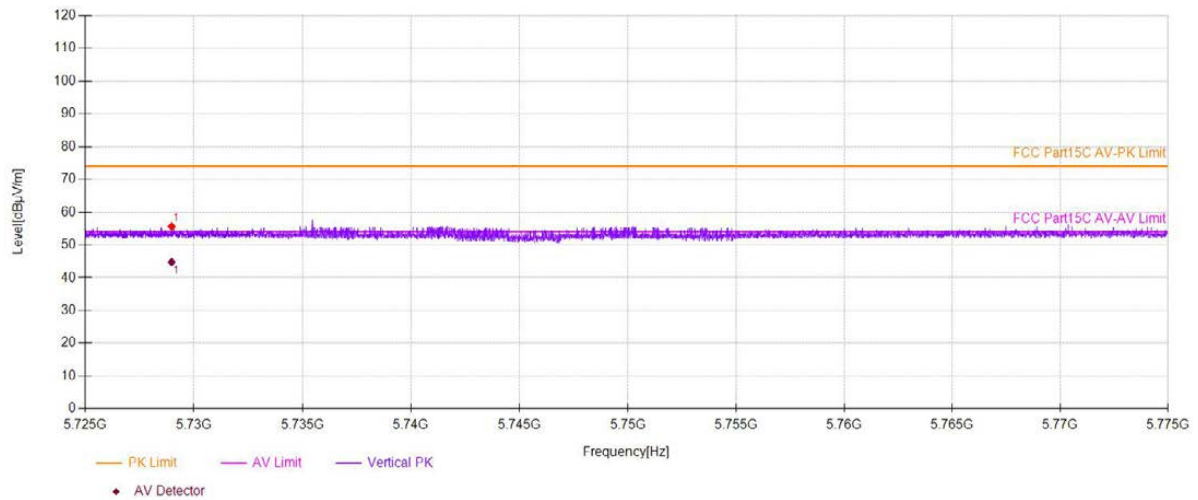

☒ For Undesirable radiated Spurious Emission in U-NII -3

☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All of the configurations or modes are tested, the data of the worst case is recorded in the report.  
Highest gain of each antenna and highest output power is ANT3 and MIMO as below:

ANT3:

| Test mode:     |                 | 802.11N(20)                |                  | Frequency(MHz): |          | 5745 |  |
|----------------|-----------------|----------------------------|------------------|-----------------|----------|------|--|
| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm)     | Over(dB) |      |  |
| 9529.76        | V               | 56.69                      | -38.54           | -27             | 11.54    |      |  |
| 13781.8        | V               | 60.60                      | -34.63           | -27             | 7.63     |      |  |
| 17498.2        | V               | 65.87                      | -29.36           | -27             | 2.36     |      |  |
| 11477.2        | H               | 58.85                      | -36.38           | -27             | 9.38     |      |  |
| 14249.6        | H               | 60.59                      | -34.64           | -27             | 7.64     |      |  |
| 17506.7        | H               | 65.67                      | -29.56           | -27             | 2.56     |      |  |

| Test mode:     |                 | 802.11N(20)                |                  | Frequency(MHz): |          | 5785 |  |
|----------------|-----------------|----------------------------|------------------|-----------------|----------|------|--|
| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm)     | Over(dB) |      |  |
| 10082.5        | V               | 58.97                      | -36.26           | -27             | 9.26     |      |  |
| 14589.7        | V               | 60.89                      | -34.34           | -27             | 7.34     |      |  |
| 17498.2        | V               | 65.32                      | -29.91           | -27             | 2.91     |      |  |
| 11494.2        | H               | 59.53                      | -35.7            | -27             | 8.7      |      |  |
| 13161.0        | H               | 59.35                      | -35.88           | -27             | 8.88     |      |  |
| 16996.4        | H               | 64.96                      | -30.27           | -27             | 3.27     |      |  |

| Test mode:     |                 | 802.11N(20)                |                  | Frequency(MHz): |          | 5825 |  |
|----------------|-----------------|----------------------------|------------------|-----------------|----------|------|--|
| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm)     | Over(dB) |      |  |
| 10771.3        | V               | 58.73                      | -36.5            | -27             | 9.5      |      |  |
| 13798.8        | V               | 60.58                      | -34.65           | -27             | 7.65     |      |  |
| 17005.0        | V               | 66.55                      | -28.68           | -27             | 1.68     |      |  |
| 11485.7        | H               | 59.46                      | -35.77           | -27             | 8.77     |      |  |
| 15465.7        | H               | 62.21                      | -33.02           | -27             | 6.02     |      |  |
| 17498.2        | H               | 65.68                      | -29.55           | -27             | 2.55     |      |  |

MIMO:

| Test mode: 802.11N(20) |              | Frequency(MHz): 5745    |               |             |          |
|------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)            | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 9528.37                | V            | 56.56                   | -38.67        | -27         | 11.67    |
| 13780.41               | V            | 60.44                   | -34.79        | -27         | 7.79     |
| 17499.48               | V            | 65.84                   | -29.39        | -27         | 2.39     |
| 11488.89               | H            | 58.77                   | -36.46        | -27         | 9.46     |
| 14261.29               | H            | 60.38                   | -34.85        | -27         | 7.85     |
| 17518.39               | H            | 65.51                   | -29.72        | -27         | 2.72     |

| Test mode: 802.11N(20) |              | Frequency(MHz): 5785    |               |             |          |
|------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)            | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 10081.11               | V            | 58.84                   | -36.39        | -27         | 9.39     |
| 14588.31               | V            | 60.73                   | -34.50        | -27         | 7.50     |
| 17499.48               | V            | 65.29                   | -29.94        | -27         | 2.94     |
| 11505.89               | H            | 59.45                   | -35.78        | -27         | 8.78     |
| 13172.69               | H            | 59.14                   | -36.09        | -27         | 9.09     |
| 17008.09               | H            | 64.8                    | -30.43        | -27         | 3.43     |

| Test mode: 802.11N(20) |              | Frequency(MHz): 5825    |               |             |          |
|------------------------|--------------|-------------------------|---------------|-------------|----------|
| Freq. (MHz)            | Ant.Pol. H/V | Field Strength (dBuV/m) | E.I.R.P (dBm) | Limit (dBm) | Over(dB) |
| 10769.91               | V            | 58.6                    | -36.63        | -27         | 9.63     |
| 13797.41               | V            | 60.42                   | -34.81        | -27         | 7.81     |
| 17006.28               | V            | 66.52                   | -28.71        | -27         | 1.71     |
| 11497.39               | H            | 59.38                   | -35.85        | -27         | 8.85     |
| 15477.39               | H            | 62                      | -33.23        | -27         | 6.23     |
| 17509.89               | H            | 65.52                   | -29.71        | -27         | 2.71     |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
d is the measurement distance in 3 meters

ANT3:

| Test mode: 802.11N(20) |          | Frequency(MHz): 5745      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 9529.76                | V        | 56.69                     | 74.00               | 17.31    | peak     |
| 13781.8                | V        | 60.60                     | 74.00               | 13.40    | peak     |
| 17498.2                | V        | 65.87                     | 74.00               | 8.13     | peak     |
| 9529.764               | V        | 38.10                     | 54.00               | 15.90    | AVG      |
| 13781.89               | V        | 40.74                     | 54.00               | 13.26    | AVG      |
| 17498.24               | V        | 43.78                     | 54.00               | 10.22    | AVG      |
| 11477.2                | H        | 58.85                     | 74.00               | 15.15    | peak     |
| 14249.6                | H        | 60.59                     | 74.00               | 13.41    | peak     |
| 17506.7                | H        | 65.67                     | 74.00               | 8.33     | peak     |
| 11477.23               | H        | 40.84                     | 54.00               | 13.16    | AVG      |
| 14249.62               | H        | 42.35                     | 54.00               | 11.65    | AVG      |
| 17506.75               | H        | 43.98                     | 54.00               | 10.02    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5785      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10082.5                | V        | 58.97                     | 74.00               | 15.03    | peak     |
| 14589.7                | V        | 60.89                     | 74.00               | 13.11    | peak     |
| 17498.2                | V        | 65.32                     | 74.00               | 8.68     | peak     |
| 10082.54               | V        | 40.44                     | 54.00               | 13.56    | AVG      |
| 14589.79               | V        | 43.95                     | 54.00               | 10.05    | AVG      |
| 17498.24               | V        | 43.69                     | 54.00               | 10.31    | AVG      |
| 11494.2                | H        | 59.53                     | 74.00               | 14.47    | peak     |
| 13161.0                | H        | 59.35                     | 74.00               | 14.65    | peak     |
| 16996.4                | H        | 64.96                     | 74.00               | 9.04     | peak     |
| 11494.24               | H        | 42.70                     | 54.00               | 11.30    | AVG      |
| 13161.08               | H        | 40.71                     | 54.00               | 13.29    | AVG      |
| 16996.49               | H        | 43.89                     | 54.00               | 10.11    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5825      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10771.3                | V        | 58.73                     | 74.00               | 15.27    | peak     |
| 13798.8                | V        | 60.58                     | 74.00               | 13.42    | peak     |
| 17005.0                | V        | 66.55                     | 74.00               | 7.45     | peak     |
| 10771.38               | V        | 41.93                     | 54.00               | 12.07    | AVG      |
| 13798.89               | V        | 40.68                     | 54.00               | 13.32    | AVG      |
| 17005.00               | V        | 43.93                     | 54.00               | 10.07    | AVG      |
| 11485.7                | H        | 59.46                     | 74.00               | 14.54    | peak     |
| 15465.7                | H        | 62.21                     | 74.00               | 11.79    | peak     |
| 17498.2                | H        | 65.68                     | 74.00               | 8.32     | peak     |
| 11485.74               | H        | 41.39                     | 54.00               | 12.61    | AVG      |
| 15465.73               | H        | 40.75                     | 54.00               | 13.25    | AVG      |
| 17498.24               | H        | 44.48                     | 54.00               | 9.52     | AVG      |

MIMO:

| Test mode: 802.11N(20) |          | Frequency(MHz): 5745      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 9528.370               | V        | 56.56                     | 74.00               | 17.44    | peak     |
| 13780.410              | V        | 60.44                     | 74.00               | 13.56    | peak     |
| 17499.480              | V        | 65.84                     | 74.00               | 8.16     | peak     |
| 9531.044               | V        | 38.08                     | 54.00               | 15.92    | AVG      |
| 13779.640              | V        | 40.48                     | 54.00               | 13.52    | AVG      |
| 17495.990              | V        | 43.59                     | 54.00               | 10.41    | AVG      |
| 11488.890              | H        | 58.77                     | 74.00               | 15.23    | peak     |
| 14261.290              | H        | 60.38                     | 74.00               | 13.62    | peak     |
| 17518.390              | H        | 65.51                     | 74.00               | 8.49     | peak     |
| 11488.920              | H        | 40.7                      | 54.00               | 13.3     | AVG      |
| 14246.310              | H        | 42.17                     | 54.00               | 11.83    | AVG      |
| 17503.440              | H        | 43.85                     | 54.00               | 10.15    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5785      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10081.110              | V        | 58.84                     | 74.00               | 15.16    | peak     |
| 14588.310              | V        | 60.73                     | 74.00               | 13.27    | peak     |
| 17499.480              | V        | 65.29                     | 74.00               | 8.71     | peak     |
| 10083.820              | V        | 40.42                     | 54.00               | 13.58    | AVG      |
| 14587.540              | V        | 43.69                     | 54.00               | 10.31    | AVG      |
| 17495.990              | V        | 43.5                      | 54.00               | 10.5     | AVG      |
| 11505.890              | H        | 59.45                     | 74.00               | 14.55    | peak     |
| 13172.690              | H        | 59.14                     | 74.00               | 14.86    | peak     |
| 17008.090              | H        | 64.8                      | 74.00               | 9.2      | peak     |
| 11505.930              | H        | 42.56                     | 54.00               | 11.44    | AVG      |
| 13157.770              | H        | 40.53                     | 54.00               | 13.47    | AVG      |
| 16993.180              | H        | 43.76                     | 54.00               | 10.24    | AVG      |

| Test mode: 802.11N(20) |          | Frequency(MHz): 5825      |                     |          |          |
|------------------------|----------|---------------------------|---------------------|----------|----------|
| Freq.<br>(MHz)         | Ant.Pol. | Emission<br>Level(dBuV/m) | Limit<br>3m(dBuV/m) | Over(dB) | Detector |
| 10769.910              | V        | 58.6                      | 74.00               | 15.4     | peak     |
| 13797.410              | V        | 60.42                     | 74.00               | 13.58    | peak     |
| 17006.280              | V        | 66.52                     | 74.00               | 7.48     | peak     |
| 10772.660              | V        | 41.91                     | 54.00               | 12.09    | AVG      |
| 13796.640              | V        | 40.42                     | 54.00               | 13.58    | AVG      |
| 17002.750              | V        | 43.74                     | 54.00               | 10.26    | AVG      |
| 11497.390              | H        | 59.38                     | 74.00               | 14.62    | peak     |
| 15477.390              | H        | 62                        | 74.00               | 12       | peak     |
| 17509.890              | H        | 65.52                     | 74.00               | 8.48     | peak     |
| 11497.430              | H        | 41.25                     | 54.00               | 12.75    | AVG      |
| 15462.420              | H        | 40.57                     | 54.00               | 13.43    | AVG      |
| 17494.930              | H        | 44.35                     | 54.00               | 9.65     | AVG      |

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

☒ Undesirable radiated Spurious Emission in band edge

| Test mode:     |                 | 802.11ax(20)                               | Frequency:       |             | 5745    |
|----------------|-----------------|--------------------------------------------|------------------|-------------|---------|
| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(RBW=100KHz)<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Verdict |
| 5723.12        | H               | 54.91                                      | -40.32           | -27         | PASS    |
| 5721.12        | V               | 55.49                                      | -39.74           | -27         | PASS    |

| Test mode:     |                 | 802.11ax(20)                               | Frequency:       |             | 5825    |
|----------------|-----------------|--------------------------------------------|------------------|-------------|---------|
| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Field Strength<br>(RBW=100KHz)<br>(dBuV/m) | E.I.R.P<br>(dBm) | Limit (dBm) | Verdict |
| 5857.12        | H               | 55.24                                      | -39.99           | -27         | PASS    |
| 5851.06        | V               | 55.20                                      | -40.03           | -27         | PASS    |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant\_F + Cab\_L - Preamp


(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters


Test Model U-NII -3  
Undesirable radiated Undesirable radiated Spurious Emission in Band Edge  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☒ 5745 Ant.Pol H

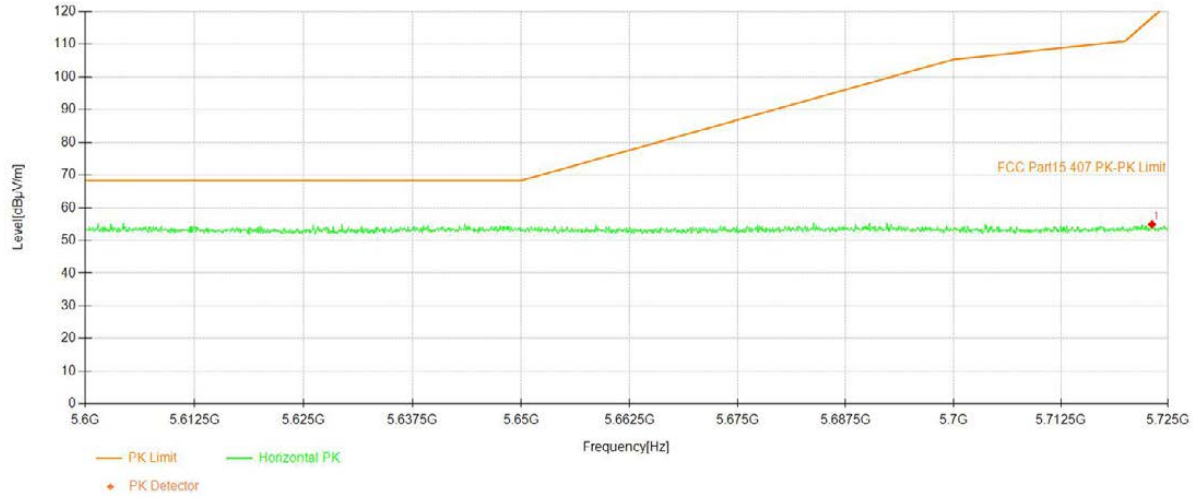


Test Model U-NII -3  
Undesirable radiated Undesirable radiated Spurious Emission in Band Edge  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☒ 5745 Ant.Pol V

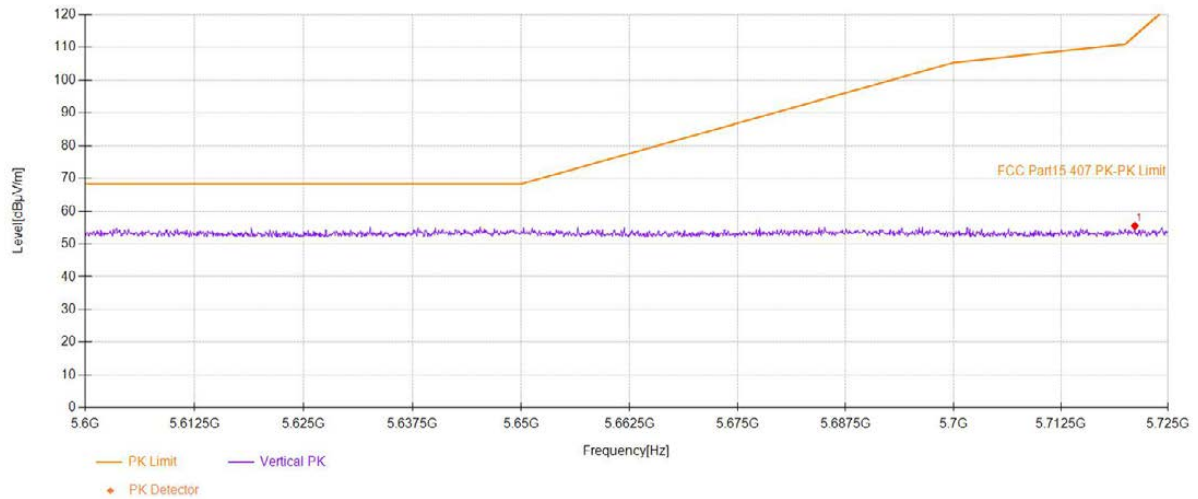

Test Model U-NII -3  
Undesirable radiated Undesirable radiated Spurious Emission in Band Edge  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☒ 5825 Ant.Pol H

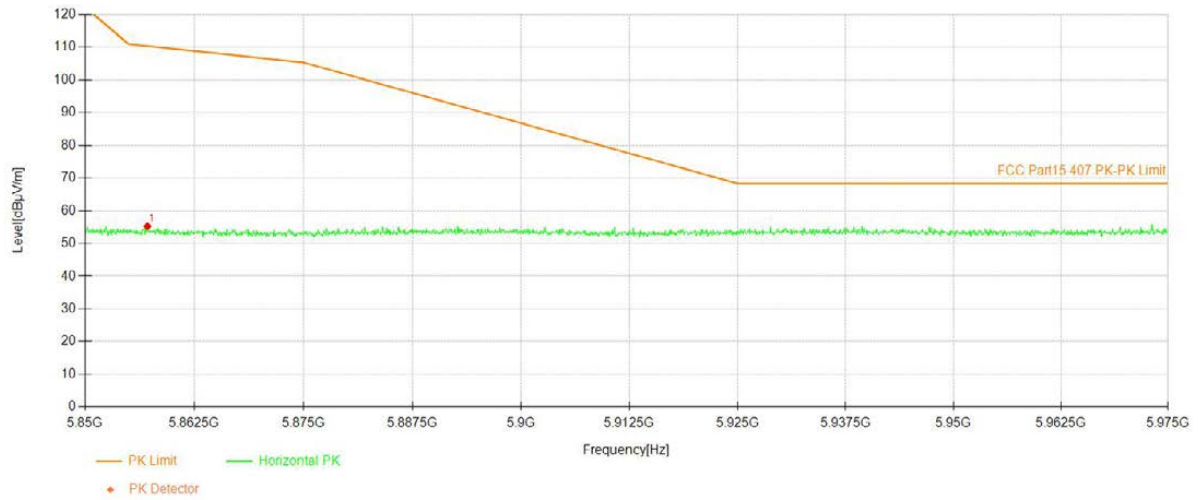


Test Model U-NII -3  
Undesirable radiated Undesirable radiated Spurious Emission in Band Edge  
☐ 802.11a ☐ 802.11n(HT20) ☒ 802.11 ax (VHT20)  
☒ 5825 Ant.Pol V

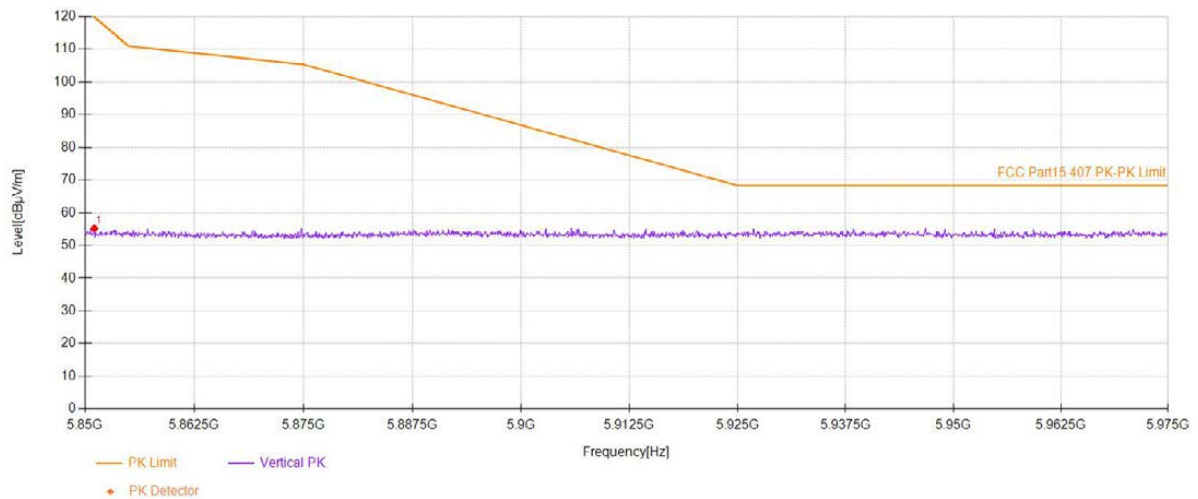


## Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

All of the configurations or modes are tested, the data of the worst case is recorded as below.

Test mode: 802.11a Frequency(MHz): 5180

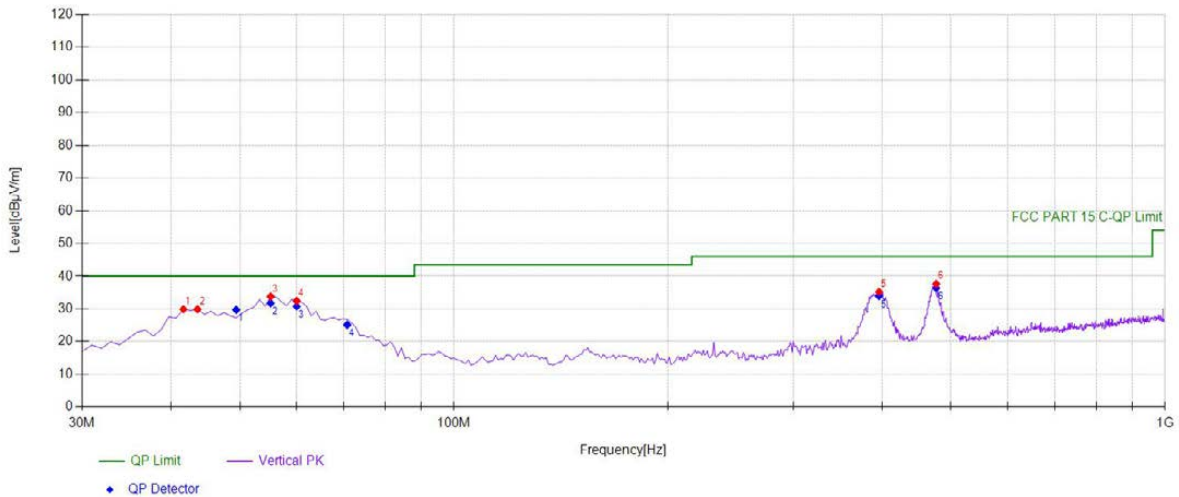


| Suspected Data List |             |                |               |                |          |                |             |          |
|---------------------|-------------|----------------|---------------|----------------|----------|----------------|-------------|----------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Detector | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1                   | 41.6517     | 47.71          | -17.80        | 29.91          | PK       | 40.00          | 10.09       | Vertical |
| 2                   | 43.5936     | 47.56          | -17.66        | 29.90          | PK       | 40.00          | 10.10       | Vertical |
| 3                   | 55.2452     | 51.68          | -17.91        | 33.77          | PK       | 40.00          | 6.23        | Vertical |
| 4                   | 60.1001     | 51.00          | -18.56        | 32.44          | PK       | 40.00          | 7.56        | Vertical |
| 5                   | 396.056     | 47.01          | -11.81        | 35.20          | PK       | 46.00          | 10.80       | Vertical |
| 6                   | 476.646     | 47.63          | -9.99         | 37.64          | PK       | 46.00          | 8.36        | Vertical |

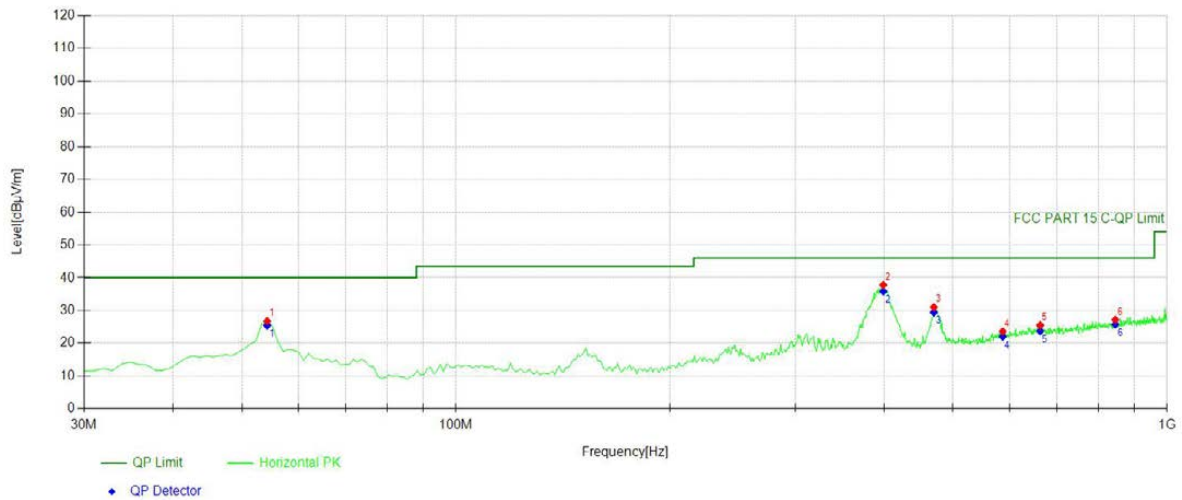

## Suspected Data List


| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Detector | Limit [dBμV/m] | Margin [dB] | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------|----------------|-------------|------------|
| 1   | 54.2743     | 44.53          | -17.78        | 26.75          | PK       | 40.00          | 13.25       | Horizontal |
| 2   | 398.969     | 49.60          | -11.79        | 37.81          | PK       | 46.00          | 8.19        | Horizontal |
| 3   | 469.849     | 41.47          | -10.43        | 31.04          | PK       | 46.00          | 14.96       | Horizontal |
| 4   | 587.337     | 30.78          | -7.14         | 23.64          | PK       | 46.00          | 22.36       | Horizontal |
| 5   | 663.073     | 31.61          | -6.14         | 25.47          | PK       | 46.00          | 20.53       | Horizontal |
| 6   | 845.615     | 30.98          | -3.83         | 27.15          | PK       | 46.00          | 18.85       | Horizontal |

Test mode: 802.11a Frequency(MHz): 5200

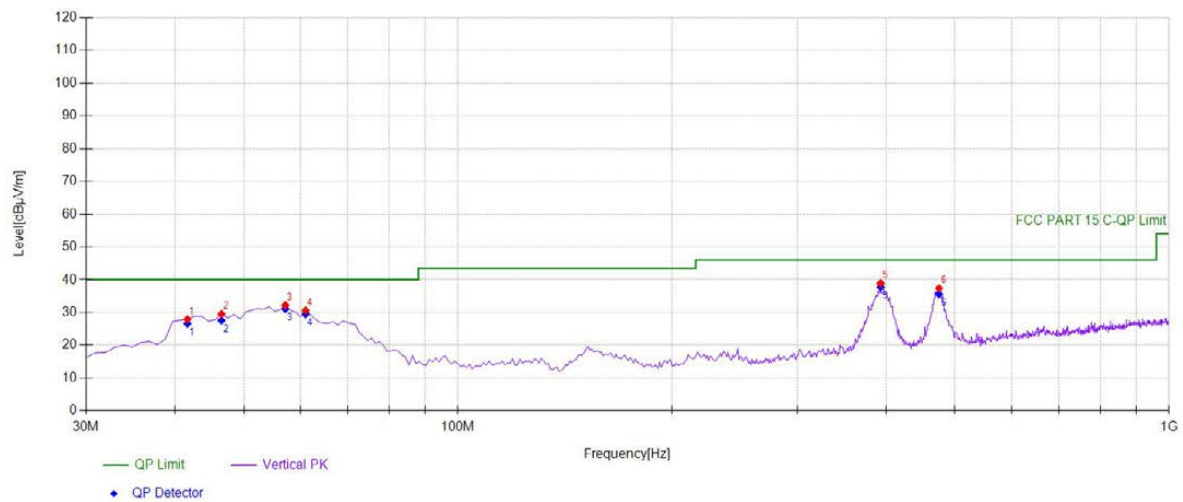

## Suspected Data List


| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Detector | Limit [dBμV/m] | Margin [dB] | Polarity |
|-----|-------------|----------------|---------------|----------------|----------|----------------|-------------|----------|
| 1   | 41.6517     | 45.71          | -17.80        | 27.91          | PK       | 40.00          | 12.09       | Vertical |
| 2   | 46.5065     | 46.99          | -17.45        | 29.54          | PK       | 40.00          | 10.46       | Vertical |
| 3   | 57.1872     | 50.40          | -18.16        | 32.24          | PK       | 40.00          | 7.76        | Vertical |
| 4   | 61.0711     | 49.34          | -18.70        | 30.64          | PK       | 40.00          | 9.36        | Vertical |
| 5   | 393.143     | 50.72          | -11.82        | 38.90          | PK       | 46.00          | 7.10        | Vertical |
| 6   | 474.704     | 47.51          | -10.12        | 37.39          | PK       | 46.00          | 8.61        | Vertical |

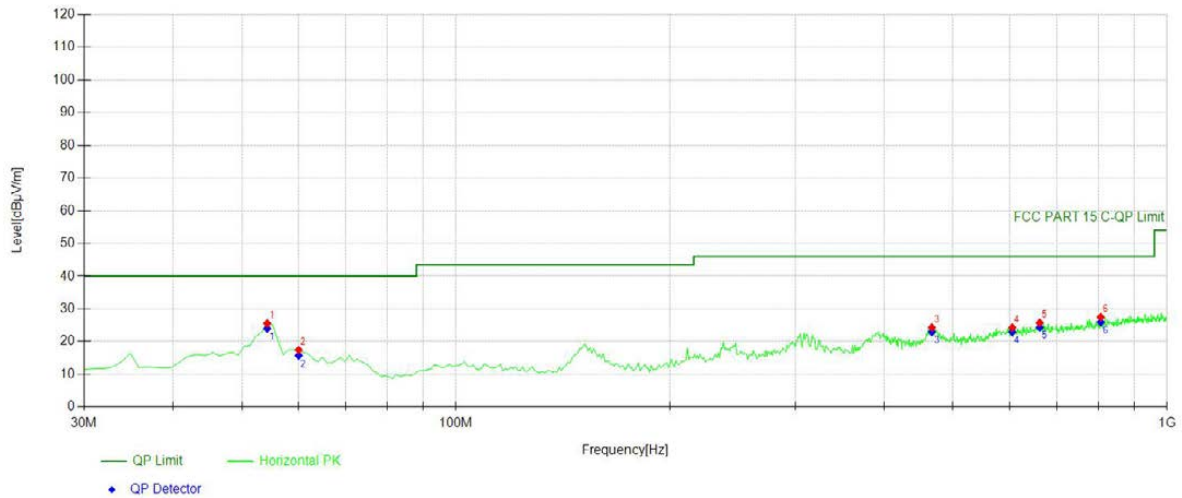

## Suspected Data List


| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Detector | Limit [dBμV/m] | Margin [dB] | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------|----------------|-------------|------------|
| 1   | 54.2743     | 43.33          | -17.78        | 25.55          | PK       | 40.00          | 14.45       | Horizontal |
| 2   | 60.1001     | 36.02          | -18.56        | 17.46          | PK       | 40.00          | 22.54       | Horizontal |
| 3   | 466.936     | 34.94          | -10.61        | 24.33          | PK       | 46.00          | 21.67       | Horizontal |
| 4   | 605.785     | 31.42          | -7.11         | 24.31          | PK       | 46.00          | 21.69       | Horizontal |
| 5   | 662.102     | 31.87          | -6.13         | 25.74          | PK       | 46.00          | 20.26       | Horizontal |
| 6   | 806.776     | 31.85          | -4.37         | 27.48          | PK       | 46.00          | 18.52       | Horizontal |

Test mode: 802.11a Frequency(MHz): 5240

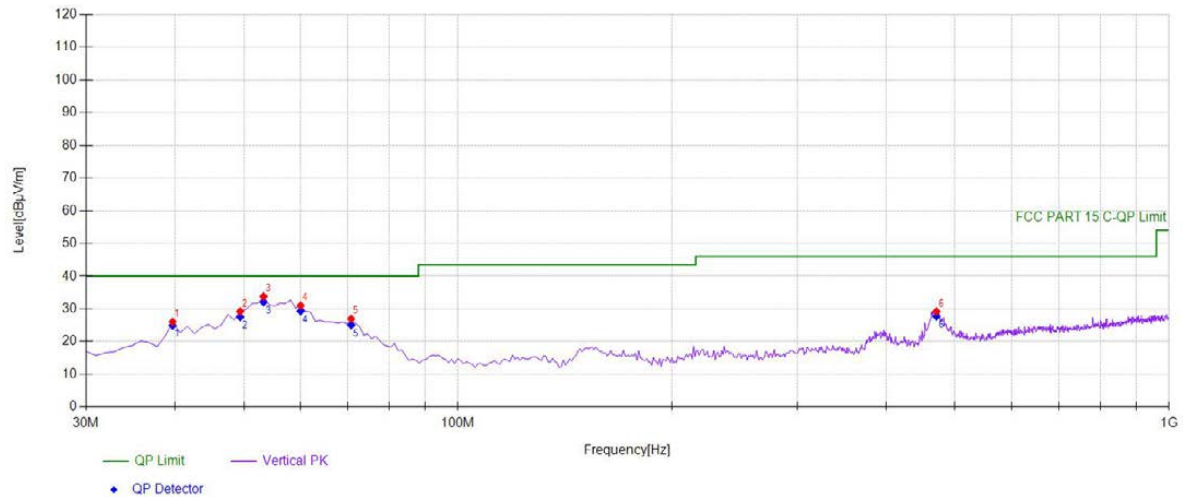

## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Detector | Limit [dBμV/m] | Margin [dB] | Polarity |
|-----|-------------|----------------|---------------|----------------|----------|----------------|-------------|----------|
| 1   | 39.7097     | 43.94          | -17.93        | 26.01          | PK       | 40.00          | 13.99       | Vertical |
| 2   | 49.4194     | 46.47          | -17.25        | 29.22          | PK       | 40.00          | 10.78       | Vertical |
| 3   | 53.3033     | 51.45          | -17.65        | 33.80          | PK       | 40.00          | 6.20        | Vertical |
| 4   | 60.1001     | 49.60          | -18.56        | 31.04          | PK       | 40.00          | 8.96        | Vertical |
| 5   | 70.7808     | 47.04          | -20.08        | 26.96          | PK       | 40.00          | 13.04       | Vertical |
| 6   | 470.820     | 39.58          | -10.37        | 29.21          | PK       | 46.00          | 16.79       | Vertical |

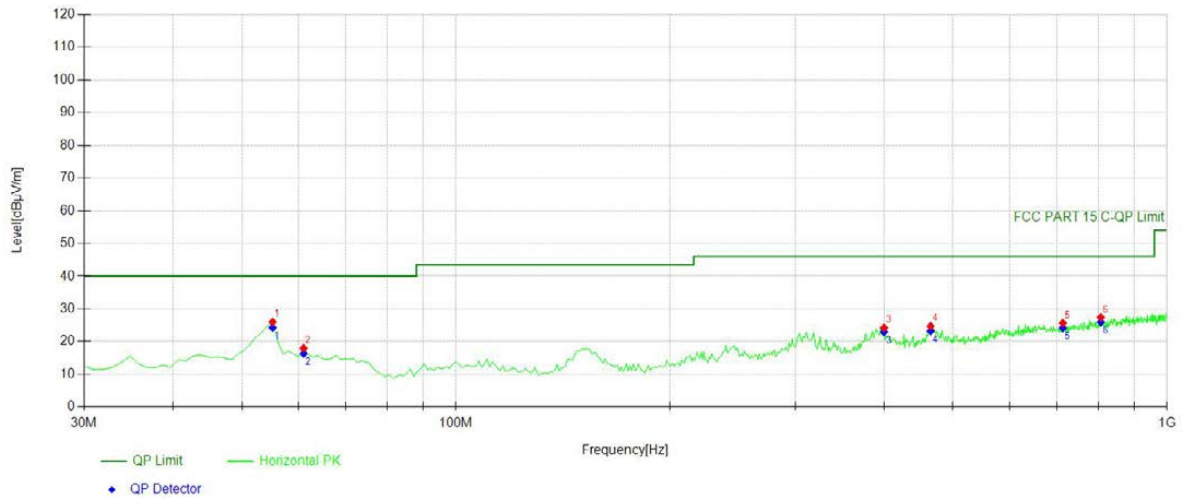

## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Detector | Limit [dBμV/m] | Margin [dB] | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------|----------------|-------------|------------|
| 1   | 55.2452     | 43.91          | -17.91        | 26.00          | PK       | 40.00          | 14.00       | Horizontal |
| 2   | 61.0711     | 36.73          | -18.70        | 18.03          | PK       | 40.00          | 21.97       | Horizontal |
| 3   | 399.939     | 36.05          | -11.79        | 24.26          | PK       | 46.00          | 21.74       | Horizontal |
| 4   | 464.995     | 35.46          | -10.73        | 24.73          | PK       | 46.00          | 21.27       | Horizontal |
| 5   | 713.563     | 31.50          | -5.83         | 25.67          | PK       | 46.00          | 20.33       | Horizontal |
| 6   | 806.776     | 31.79          | -4.37         | 27.42          | PK       | 46.00          | 18.58       | Horizontal |

## 8.5 POWER LINE CONDUCTED EMISSIONS

### 8.5.1 Applicable Standard

According to FCC Part 15.207(a)

### 8.5.2 Conformance Limit

| Frequency(MHz) | Conducted Emission Limit |         |
|----------------|--------------------------|---------|
|                | Quasi-peak               | Average |
| 0.15-0.5       | 66-56                    | 56-46   |
| 0.5-5.0        | 56                       | 46      |
| 5.0-30.0       | 60                       | 50      |

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 8.5.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

### 8.5.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.


Repeat above procedures until all frequency measured were complete.

### 8.5.5 Test Results


#### Pass

|               |        |                |           |
|---------------|--------|----------------|-----------|
| Temperature : | 20.8°C | ATM Pressure:  | 1011 mbar |
| Humidity :    | 61%    | Test Engineer: | WAP       |

All of the configurations or modes are tested, the data of the worst case is recorded as below.

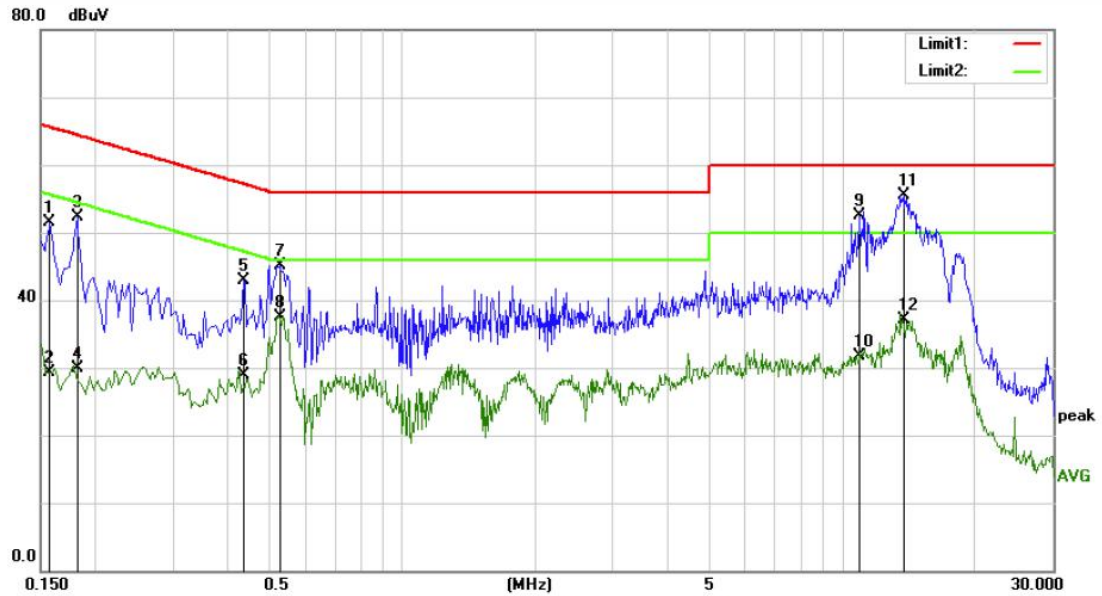

| Site Conduction #1 |              |                          |                         | Phase: <b>L1</b>         |               | Temperature: 20.8 |          |         |
|--------------------|--------------|--------------------------|-------------------------|--------------------------|---------------|-------------------|----------|---------|
| No. Mk.            | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB        | Detector | Comment |
| 1                  | 0.1580       | 41.97                    | 9.60                    | 51.57                    | 65.57         | -14.00            | QP       |         |
| 2                  | 0.1580       | 19.65                    | 9.60                    | 29.25                    | 55.57         | -26.32            | AVG      |         |
| 3                  | 0.1820       | 42.35                    | 9.89                    | 52.24                    | 64.39         | -12.15            | QP       |         |
| 4                  | 0.1820       | 20.09                    | 9.89                    | 29.98                    | 54.39         | -24.41            | AVG      |         |
| 5                  | 0.4340       | 33.11                    | 9.77                    | 42.88                    | 57.18         | -14.30            | QP       |         |
| 6                  | 0.4340       | 19.17                    | 9.77                    | 28.94                    | 47.18         | -18.24            | AVG      |         |
| 7                  | 0.5260       | 35.50                    | 9.67                    | 45.17                    | 56.00         | -10.83            | QP       |         |
| 8                  | 0.5260       | 27.93                    | 9.67                    | 37.60                    | 46.00         | -8.40             | AVG      |         |
| 9                  | 10.9220      | 42.49                    | 10.02                   | 52.51                    | 60.00         | -7.49             | QP       |         |
| 10                 | 10.9220      | 21.70                    | 10.02                   | 31.72                    | 50.00         | -18.28            | AVG      |         |
| 11 *               | 13.7300      | 45.53                    | 9.95                    | 55.48                    | 60.00         | -4.52             | QP       |         |
| 12                 | 13.7300      | 27.22                    | 9.95                    | 37.17                    | 50.00         | -12.83            | AVG      |         |

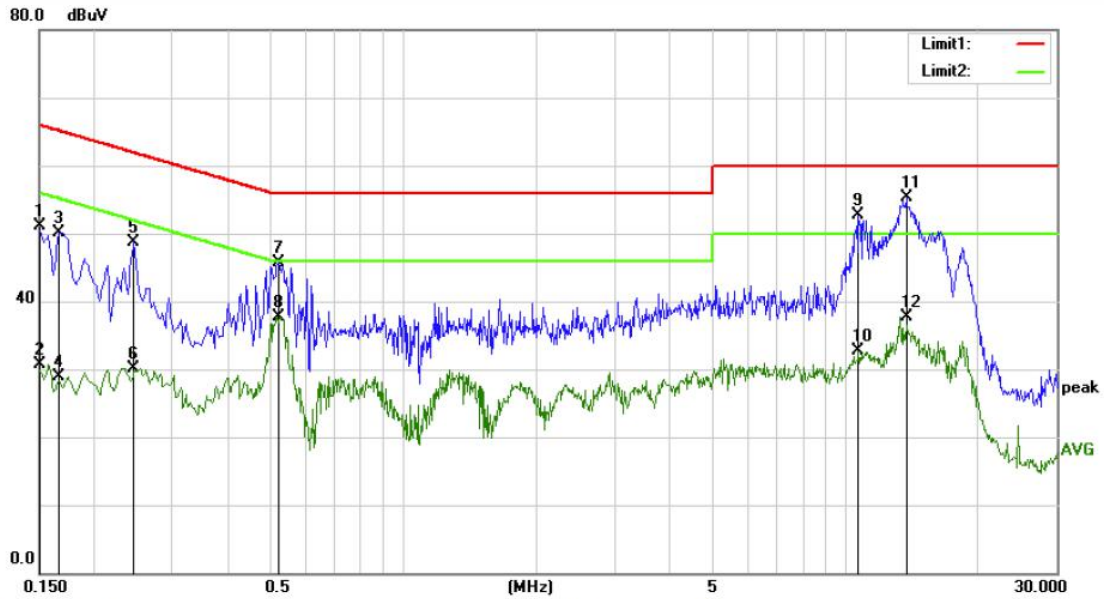

| Site Conduction #1 |     |         |               |                | Phase: N     |       | Temperature: 20.8 |                  |
|--------------------|-----|---------|---------------|----------------|--------------|-------|-------------------|------------------|
| No.                | Mk. | Freq.   | Reading Level | Correct Factor | Measure-ment | Limit | Over              |                  |
|                    |     | MHz     | dBuV          | dB             | dBuV         | dBuV  | dB                | Detector Comment |
| 1                  |     | 0.1500  | 41.69         | 9.51           | 51.20        | 66.00 | -14.80            | QP               |
| 2                  |     | 0.1500  | 21.13         | 9.51           | 30.64        | 56.00 | -25.36            | AVG              |
| 3                  |     | 0.1660  | 40.50         | 9.70           | 50.20        | 65.16 | -14.96            | QP               |
| 4                  |     | 0.1660  | 19.23         | 9.70           | 28.93        | 55.16 | -26.23            | AVG              |
| 5                  |     | 0.2460  | 38.73         | 10.07          | 48.80        | 61.89 | -13.09            | QP               |
| 6                  |     | 0.2460  | 19.96         | 10.07          | 30.03        | 51.89 | -21.86            | AVG              |
| 7                  |     | 0.5220  | 36.03         | 9.67           | 45.70        | 56.00 | -10.30            | QP               |
| 8                  |     | 0.5220  | 28.11         | 9.67           | 37.78        | 46.00 | -8.22             | AVG              |
| 9                  |     | 10.7220 | 42.66         | 10.03          | 52.69        | 60.00 | -7.31             | QP               |
| 10                 |     | 10.7220 | 22.68         | 10.03          | 32.71        | 50.00 | -17.29            | AVG              |
| 11                 | *   | 13.7540 | 45.35         | 9.96           | 55.31        | 60.00 | -4.69             | QP               |
| 12                 |     | 13.7540 | 27.72         | 9.96           | 37.68        | 50.00 | -12.32            | AVG              |

## 8.6 ANTENNA APPLICATION

### 8.6.1 Antenna Requirement

| Standard            | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.6.2 Result

#### PASS

Temperature : 25°C      ATM Pressure: 1011 mbar  
Humidity : 60 %      Test Engineer: XXH

The EUT is integrated antenna, the antenna gain as below:

Ant1: 6.38dBi, Ant2: 6.11dBi, Ant3: 6.50dBi

- ☒ Antennas use a permanently attached antenna which is not replaceable.
- ☐ Not using a standard antenna jack or electrical connector for antenna replacement
- ☐ The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission:

| Frequency(MHz) | Ant_F(dB) | Cab_L(dB) | Preamp(dB) | Correct Factor(dB) |
|----------------|-----------|-----------|------------|--------------------|
| 0.009          | 20.6      | 0.03      | \          | 20.63              |
| 0.15           | 20.7      | 0.1       | \          | 20.8               |
| 1              | 20.9      | 0.15      | \          | 21.05              |
| 10             | 20.1      | 0.28      | \          | 20.38              |
| 30             | 18.8      | 0.45      | \          | 19.25              |
| 30             | 11.7      | 0.62      | 27.9       | -15.58             |
| 100            | 12.5      | 1.02      | 27.8       | -14.28             |
| 300            | 12.9      | 1.91      | 27.5       | -12.69             |
| 600            | 19.2      | 2.92      | 27         | -4.88              |
| 800            | 21.1      | 3.54      | 26.6       | -1.96              |
| 1000           | 22.3      | 4.17      | 26.2       | 0.27               |
| 1000           | 25.6      | 1.76      | 41.4       | -14.04             |
| 3000           | 28.9      | 3.27      | 43.2       | -11.03             |
| 5000           | 31.1      | 4.2       | 44.6       | -9.3               |
| 8000           | 36.2      | 5.95      | 44.7       | -2.55              |
| 10000          | 38.4      | 6.3       | 43.9       | 0.8                |
| 12000          | 38.5      | 7.14      | 42.3       | 3.34               |
| 15000          | 40.2      | 8.15      | 41.4       | 6.95               |
| 18000          | 45.4      | 9.02      | 41.3       | 13.12              |
| 18000          | 37.9      | 1.81      | 47.9       | -8.19              |
| 21000          | 37.9      | 1.95      | 48.7       | -8.85              |
| 25000          | 39.3      | 2.01      | 42.8       | -1.49              |
| 28000          | 39.6      | 2.16      | 46.0       | -4.24              |
| 31000          | 41.2      | 2.24      | 44.5       | -1.06              |
| 34000          | 41.5      | 2.29      | 46.6       | -2.81              |
| 37000          | 43.8      | 2.30      | 46.4       | -0.3               |
| 40000          | 43.2      | 2.50      | 42.2       | 3.5                |

--- End of Report ---

## 声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。

This report is invalid without the signature of the authorized approver and "special seal for testing".

2. 未经许可本报告不得部分复制。

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。

Objections shall be raised within 20 days from the date receiving the report.