

TEST REPORT

Product Name : Wireless Access Point
Model Number : RG-RAP72-Wall
FCC ID : 2AX5J-RAP72WALL

Prepared for : Ruijie Networks Co., Ltd.
Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, Cangshan District, Fuzhou, Fujian, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2405280215W00101R
Date(s) of Tests : July 24, 2024 to August 30, 2024
Date of Issue : September 4, 2024

TABLE OF CONTENTS

1 EUT TECHNICAL DESCRIPTION.....	5
2 SUMMARY OF TEST RESULT.....	6
3 TEST METHODOLOGY.....	7
3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
3.2 MEASUREMENT EQUIPMENT USED.....	7
3.3 DESCRIPTION OF TEST MODES.....	8
4 FACILITIES AND ACCREDITATIONS.....	9
4.1 FACILITIES.....	9
4.2 EQUIPMENT.....	9
4.3 LABORATORY ACCREDITATIONS AND LISTINGS.....	9
5 TEST SYSTEM UNCERTAINTY.....	10
6 SETUP OF EQUIPMENT UNDER TEST.....	11
6.1 RADIO FREQUENCY TEST SETUP 1.....	11
6.2 RADIO FREQUENCY TEST SETUP 2.....	11
6.3 CONDUCTED EMISSION TEST SETUP.....	14
6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	15
6.5 SUPPORT EQUIPMENT.....	15
7 TEST REQUIREMENTS.....	16
7.1 MINIMUM (6DB) OCCUPIED BANDWIDTH.....	16
7.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	38
7.3 MAXIMUM POWER SPECTRAL DENSITY.....	62
7.4 UNWANTED SPURIOUS EMISSIONS.....	85
7.5 RADIATED EMISSION.....	161
7.6 CONDUCTED EMISSION TEST.....	175
7.7 ANTENNA APPLICATION.....	178

TEST RESULT CERTIFICATION


Applicant : Ruijie Networks Co., Ltd.
 Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, Cangshan District, Fuzhou, Fujian, China
 Manufacturer : Ruijie Networks Co., Ltd.
 Address : Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, Cangshan District, Fuzhou, Fujian, China
 EUT : Wireless Access Point
 Model Name : RG-RAP72-Wall
 Trademark : 


Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 , Subpart J FCC 47 CFR Part 15 , Subpart C	PASS


The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the above table standards requirement.
 The test results of this report relate only to the tested sample identified in this report.

Date of Test : July 24, 2024 to August 30, 2024

Prepared by : 
 Una Yu/Editor

Reviewer : 
 Joe Xia/Supervisor

Approved & Authorized Signer : 
 Lisa Wang/Manager



1 EUT TECHNICAL DESCRIPTION

Product Name:	Wireless Access Point
Model Number:	RG-RAP72-Wall
IEEE 802.11 WLAN Mode Supported:	802.11b 802.11g 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth) 802.11ax(20MHz channel bandwidth) 802.11ax(40MHz channel bandwidth) 802.11be(20MHz channel bandwidth) 802.11be(40MHz channel bandwidth)
Modulation:	DSSS/OFDM/OFDMA
Operating Frequency Range:	2412-2462MHz
Number of Channels:	11 channels for 802.11b/g/n(20)/ax(20)/be(20) 7 Channels for 802.11n(40)/ax(40)/be(40)
Antenna Type:	Integrated Antenna
Antenna Gain:	ANT1: 2.84dBi, ANT2: 2.41dBi (Note: The antenna information is provided by the customers, which will have a certain impact on the test results.)
Smart system:	MIMO
Power Supply Options:	IEEE 802.3at compliant PoE+ (Under normal operation. The PoE Output function is enabled for LAN4 port and the maximum power output is 10 W.), compatible with IEEE 802.3af compliant PoE (the PoE OUT function of LAN4 port is disabled when IEEE 802.3af compliant PoE is used.)
Power Supply:	PoE Input: 44-57VDC, 0.6A Max (Note: All the PoE 44V/48V/57V power are tested, and find the PoE 48V is the worst, so only the worst data of PoE 48V is shown in the report.)
Temperature Range:	0°C~40°C

2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
<p>NOTE1: The results of this report do not take into account the uncertainty. NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits. NOTE3: The product only supports OFDMA full RU tone, so only the data of full RU are shown in the report.</p>			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID: 2AX5J-RAP72WALL** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

3 TEST METHODOLOGY

3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

3.2 MEASUREMENT EQUIPMENT USED

For Conducted Emission Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2024/5/11	1Year
AMN	Rohde & Schwarz	ENV216	101161	2024/5/10	1Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Pre-Amplifier	Bonn	BLMA 011001N	2213967A	2023/10/23	1Year
EMI Test Receiver	Rohde & Schwarz	ESR7	102551	2023/10/23	1Year
Bilog Antenna	Schwarzbeck	VULB9163	9163142	2024/7/8	2Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1198	2023/6/2	2Year
Pre-Amplifier	Bonn	BLMA 0118-5G	2213967B-01	2023/10/23	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101290	2023/10/23	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2023/5/12	2Year
Pre-Amplifier	Lunar EM	LNA18G26-40	J1012131010 001	2024/5/11	1Year
Pre-Amplifier	Lunar EM	LNA26G40-40	J1013131028 001	2024/5/11	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2023/5/12	2Year
Wideband Radio Communication Tester	R&S	CMW500	171168	2023/9/14	1Year

For Other Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wideband Radio Communication Tester	R&S	CMW500	171168	2023/9/14	1Year
Frequency Extender	R&S	CMW-Z800A	100430	2023/9/14	1Year
Spectrum Analyzer	R&S	FSV3044	101289	2023/9/14	1Year
Analog Signal Generator	R&S	SMB100A	183237	2023/9/16	1Year
Vector Signal Generator	R&S	SMM100A	101808	2023/9/16	1Year
RF Control Unit(Power Meter)	Tonscend	JS0806-2	22C8060567	2023/9/14	1Year
Temperature&Hum idity Chamber	ESPEC	EL-02KA	12107166	2024/5/10	1 Year
Temperature&Hum idity Chamber	ESPEC	EL-02KA	12107166	2024/5/10	1 Year

3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channels list for 802.11b/g/n(20)/ax(20)/be(20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442	12	2467
3	2422	8	2447	13	2472
4	2427	9	2452		
5	2432	10	2457		

Frequency and Channels list for 802.11n(40)/ax(40)/be(40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442	10	2457
5	2432	8	2447	11	2462

Test Frequency and Channels for 802.11b/g/n(20)/ax(20)/be(20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442	13	2472

Test Frequency and channels for 802.11n(40)/ax(40)/be(40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442	11	2462

Multi-antenna correlation:

<input checked="" type="checkbox"/>	Transmit Signals are Correlated Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2 / N_{ANT}]$ dBi
<input type="checkbox"/>	All Transmit Signals are Completely Uncorrelated Directional gain = $10 \log[(10^{G^1/10} + 10^{G^2/10} + \dots + 10^{G^N/10}) / N_{ANT}]$ dBi

ANT1: 2.84dBi, ANT2: 2.41dBi

Directional gain = 5.64 dBi

4 FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (Shenzhen) Co., Ltd.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

4.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods".

4.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm : EMTEK (SHENZHEN) CO., LTD.


Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%.

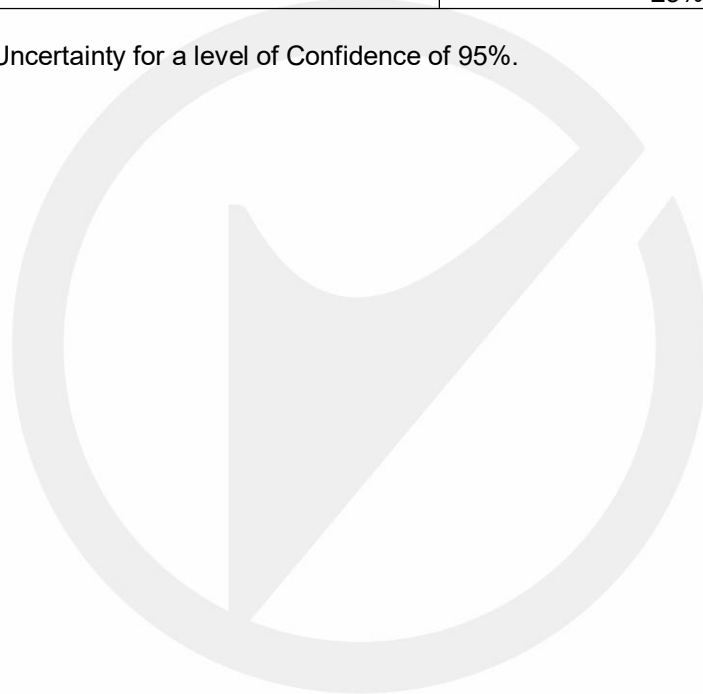

6 SETUP OF EQUIPMENT UNDER TEST

6.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Measurements shall be taken, using the following steps, at a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment (see RSS-Gen for applicable versions of ANSI and CISPR standards).

- (1) Line the ground plane with absorbers between the transmitter and the receive antenna to minimize reflections. The absorbers used should have a minimum-rated attenuation of 20 dB through the measurement frequency range of interest. The absorbers shall be positioned to replicate the layout used when compliance with the applicable acceptability criterion was achieved, as set forth in the aforementioned standards on site validation.
- (2) Set the height of the receive antenna to 1.5 m. The receive antenna must be one that was designed and fabricated to operate over the entire frequency range of interest, for example, an appropriate standard gain horn.
- (3) The distance between the receive antenna and the radiating source shall be sufficient in order to ensure far-field conditions.
- (4) Mount the transmitter at a height of 1.5 m.
- (5) Configure the device under test (DUT) to produce the maximum power spectral density as measured while assessing compliance with Section 6.2.2 (i.e. channel frequency, modulation type and data rate). If the DUT is equipped with a detachable antenna and the antenna is intended for remote installation (i.e.

tower-mounted), the DUT may be substituted with a suitable signal generator. The level and frequency settings on the generator shall be set so as to reproduce the maximum power spectral density, measured within a 1 MHz bandwidth, obtained while assessing compliance to Section 6.2.2.

(6) Position the transmitter or the radiating antenna so that elevation pattern measurements can be taken.

(7) Find the 0° reference point in the horizontal plane.

(8) Care should be taken when positioning the receive antenna to avoid cross-polarization. Antennas of known mounting polarization should be assessed with the receive antenna oriented in the same polarity. If the polarization of the transmit antenna is unknown or the transmit antenna can be mounted in either polarization, e.i.r.p. measurements should be performed to find which mounting polarity provides the highest e.i.r.p. value. Testing shall be carried out with the receive antenna and the DUT mounted in each polarity.

(9) The emission shall be centred on the display of the spectrum analyzer with the following settings:

i. If the power spectral density of the DUT was assessed with a peak detector and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

ii. If the power spectral density of the DUT was assessed using a sample detector with power averaging and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a sample detector, configured to produce 100 power averages and set with a resolution bandwidth, as well as a video bandwidth of 1 MHz.

iii. If the antenna can be detached from the DUT, a continuous wave (CW) signal equal to that of the power spectral density measurement may be used, the spectrum analyzer shall be set to peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

(10) Rotate the turntable 360° recording the field strength at each step. Throughout the main beam of the antenna, the step size shall be kept to a maximum of 1°.

Once outside the main beam of the antenna, the maximum step size shall be as follows, when compared to the requirements of Section 6.2.2:

i. Between 0° and 8°, maximum step size of 2°;

ii. Between 8° and 40°, maximum step size of 4°;

iii. Between 40° and 45°, maximum step size of 1°;

iv. Between 45° and 90°, maximum step size of 5°.

Once the mask reaches 90°, the mask will be inverted and the step size will follow in the same manner as above.

For the purpose of this procedure, the main beam of the antenna is defined as the 3 dB beamwidth.

(11) Convert the measured field strength values in terms of e.i.r.p. density (dBW/1 MHz) using the following equation:

$$\text{e.i.r.p. density (dBW/MHz)} = 10 \log((E \cdot r)^2 / 30)$$

E = field strength in V/m

r = measurement distance in metres

(12) Plot the results against the emission mask with reference to the horizontal plane.


(13) Using the plot, the 0° can be rotated to determine the worst-case installation tilt angle.

(14) Testing shall be performed using the highest gain antenna for every antenna type, if applicable.


(15) Antenna type(s), antenna model number(s), and worst-case tilt angle(s) necessary to remain compliant with the elevation mask requirement set forth in Section 6.2.2(3) of RSS-247 shall be clearly indicated in the user manual.

The following figure is an example of a polar elevation mask measured using the Method 1 reference to dB μ V/m at 3 m.


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

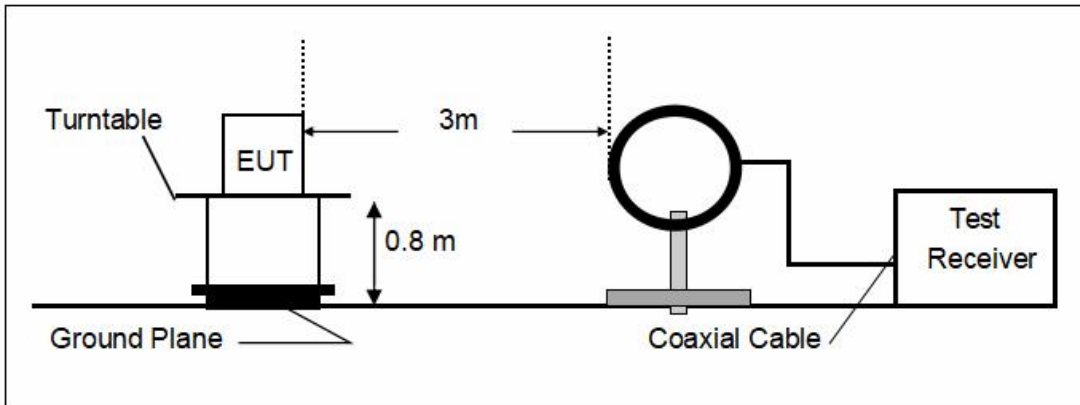

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

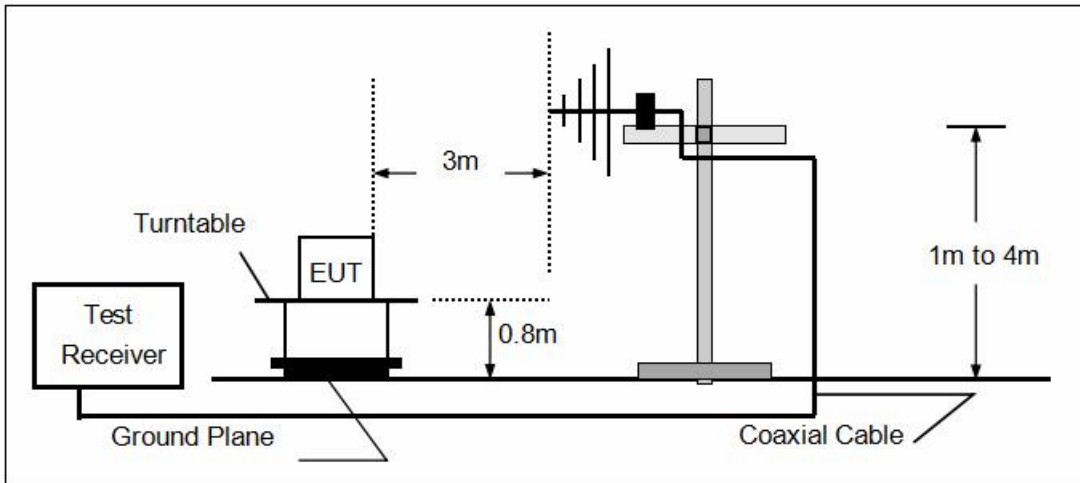

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

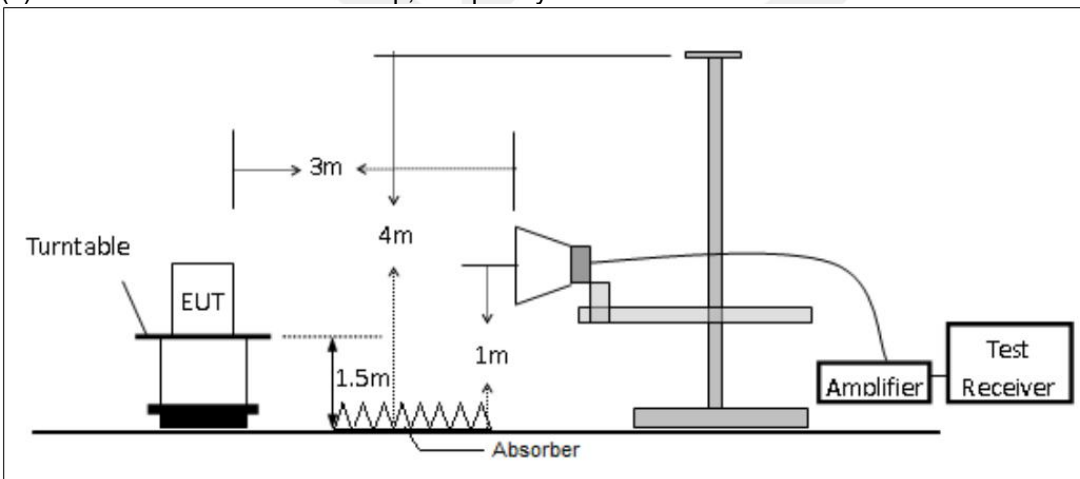


6.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

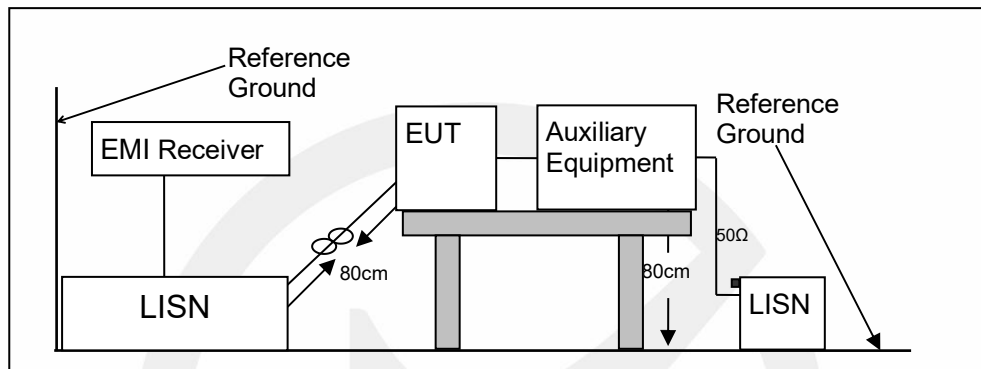

6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

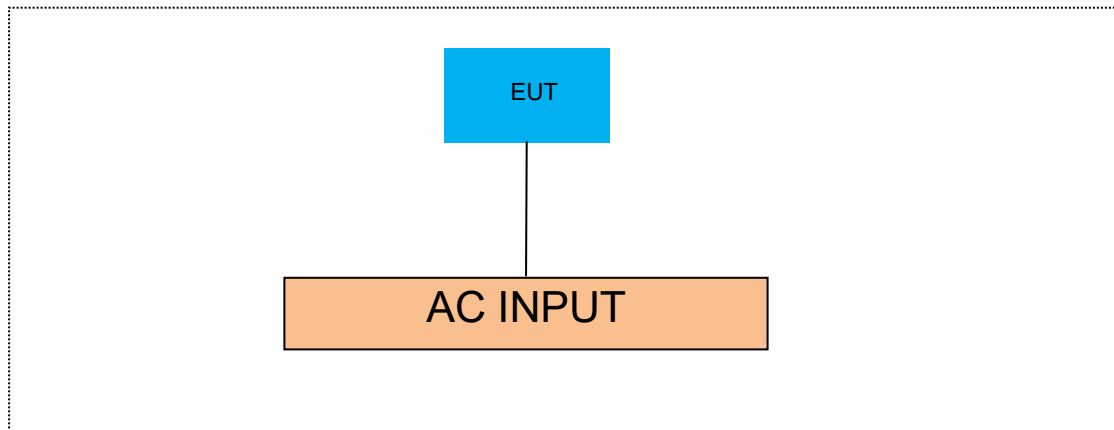

6.5 SUPPORT EQUIPMENT

POE : Model: EWPAM1NPOE
Input: 100-240V~50/60Hz
Output:44V~57V, 0.74A
CE, FCC

Notes:

- 1.All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2.Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7 TEST REQUIREMENTS

7.1 MINIMUM (6DB) OCCUPIED BANDWIDTH

7.1.1 Applicable Standard

According to FCC Part15.247 (a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1.

7.1.4 Test Procedure

The EUT was operating in WIFI mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW.

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.

7.1.5 Test Results

Temperature :	25°C	ATM Pressure::	1011 mbar
Humidity :	45 %	Test Engineer:	GJ


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.04	2407.96	2416.00	0.5	PASS
	Ant2	2412	8.04	2407.96	2416.00	0.5	PASS
	Ant1	2437	8.04	2432.96	2441.00	0.5	PASS
	Ant2	2437	8.04	2432.96	2441.00	0.5	PASS
	Ant1	2462	8.04	2457.96	2466.00	0.5	PASS
	Ant2	2462	8.08	2457.96	2466.04	0.5	PASS
11G	Ant1	2412	16.28	2403.84	2420.12	0.5	PASS
	Ant2	2412	16.32	2403.80	2420.12	0.5	PASS
	Ant1	2437	15.68	2429.08	2444.76	0.5	PASS
	Ant2	2437	15.36	2429.40	2444.76	0.5	PASS
	Ant1	2462	15.68	2454.20	2469.88	0.5	PASS
	Ant2	2462	15.92	2453.84	2469.76	0.5	PASS
11N20MI MO	Ant1	2412	16.52	2403.60	2420.12	0.5	PASS
	Ant2	2412	16.92	2403.24	2420.16	0.5	PASS
	Ant1	2437	16.52	2428.84	2445.36	0.5	PASS
	Ant2	2437	16.56	2428.80	2445.36	0.5	PASS
	Ant1	2462	16.28	2453.84	2470.12	0.5	PASS
	Ant2	2462	16.56	2453.60	2470.16	0.5	PASS
11N40MI MO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant2	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant1	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant2	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant1	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant2	2452	35.12	2434.48	2469.60	0.5	PASS
11AX20M IMO	Ant1	2412	18.32	2402.72	2421.04	0.5	PASS
	Ant2	2412	18.56	2402.68	2421.24	0.5	PASS
	Ant1	2437	18.52	2427.68	2446.20	0.5	PASS
	Ant2	2437	18.16	2427.88	2446.04	0.5	PASS
	Ant1	2462	18.28	2452.96	2471.24	0.5	PASS
	Ant2	2462	18.04	2452.88	2470.92	0.5	PASS
11AX40M IMO	Ant1	2422	35.36	2404.48	2439.84	0.5	PASS
	Ant2	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant1	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant2	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant1	2452	36.16	2433.44	2469.60	0.5	PASS
	Ant2	2452	35.12	2434.48	2469.60	0.5	PASS
11BE20M IMO	Ant1	2412	18.52	2402.72	2421.24	0.5	PASS
	Ant2	2412	18.36	2402.68	2421.04	0.5	PASS
	Ant1	2437	18.28	2427.72	2446.00	0.5	PASS
	Ant2	2437	18.08	2427.92	2446.00	0.5	PASS
	Ant1	2462	18.60	2452.68	2471.28	0.5	PASS
	Ant2	2462	18.52	2452.72	2471.24	0.5	PASS
11BE40M IMO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant2	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant1	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant2	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant1	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant2	2452	35.12	2434.48	2469.60	0.5	PASS

11B_Ant1_2412

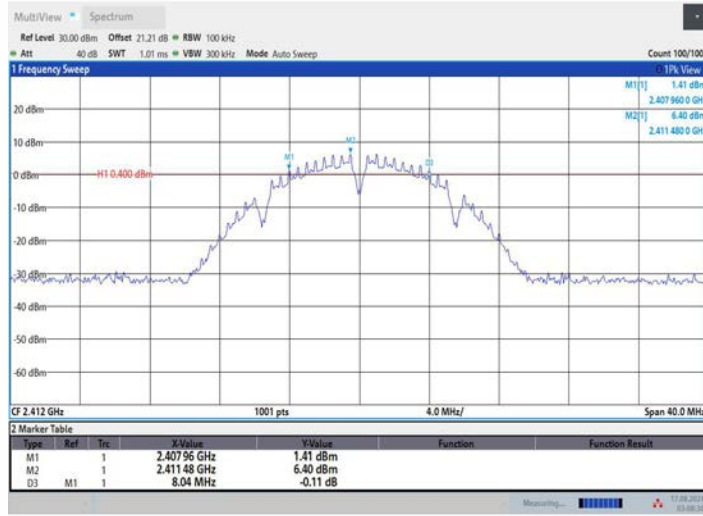


03:08:30 17.08.2024

11B_Ant2_2412

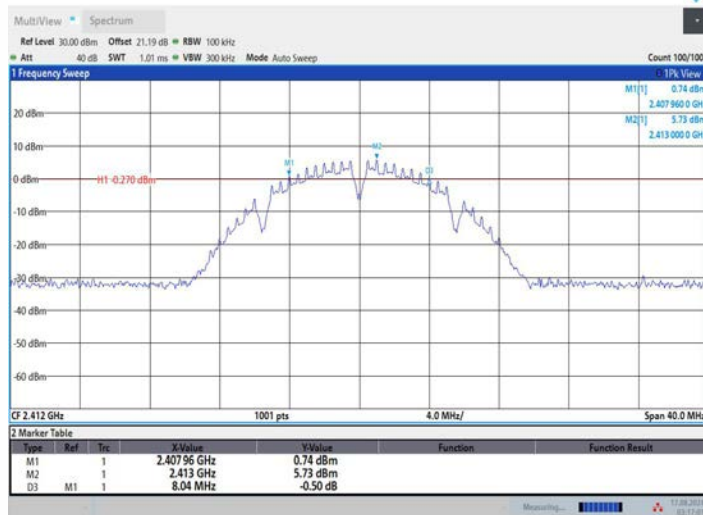


03:17:02 17.08.2024

11B_Ant1_2437

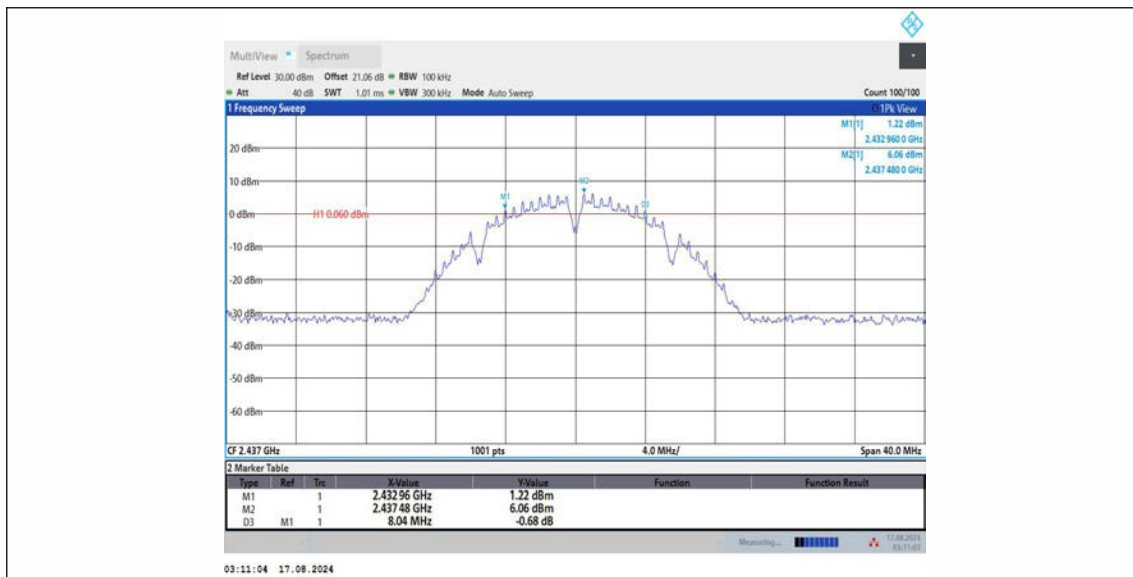


11B_Ant2_2437

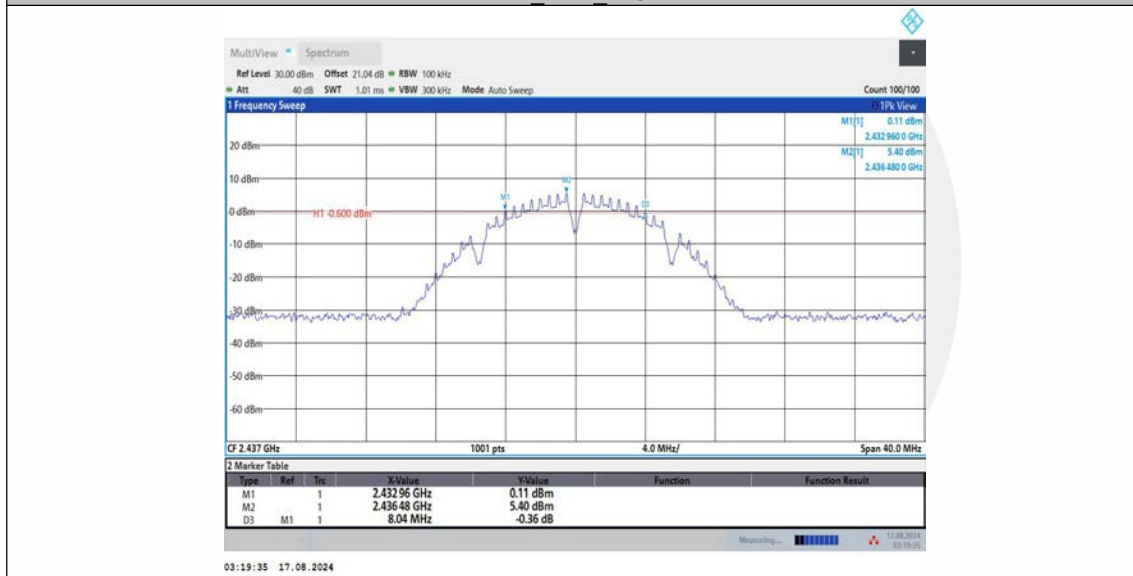


11B_Ant1_2462




11B_Ant2_2462

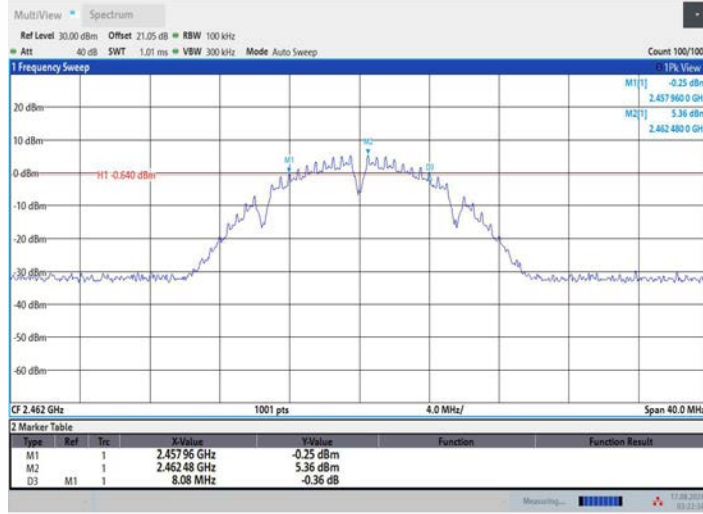


11G_Ant1_2412

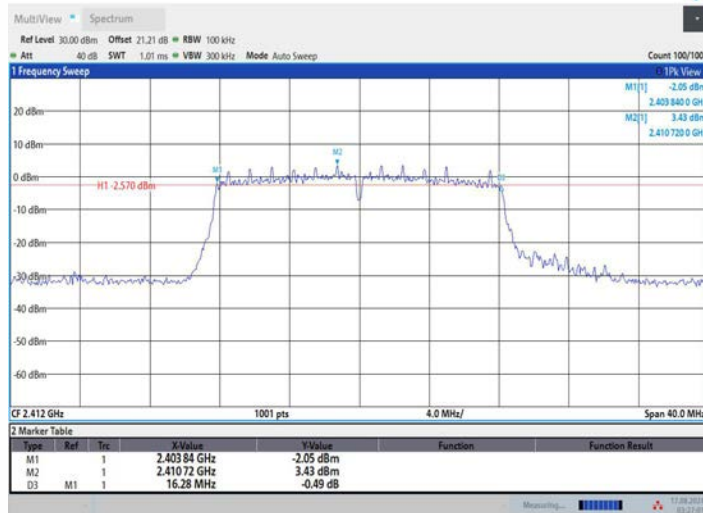


11G_Ant2_2412

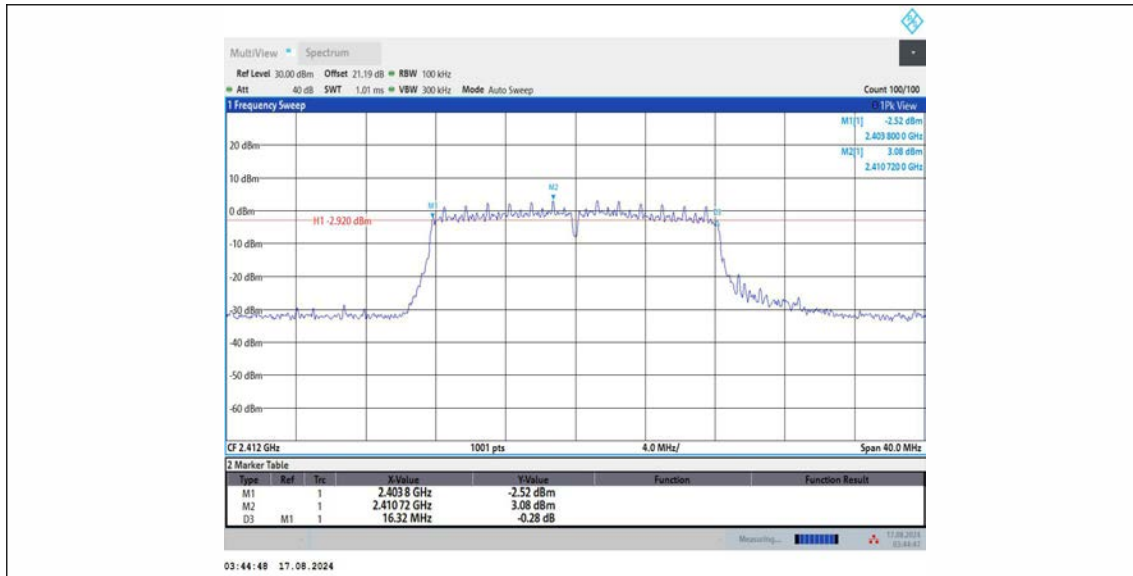

11G_Ant1_2437

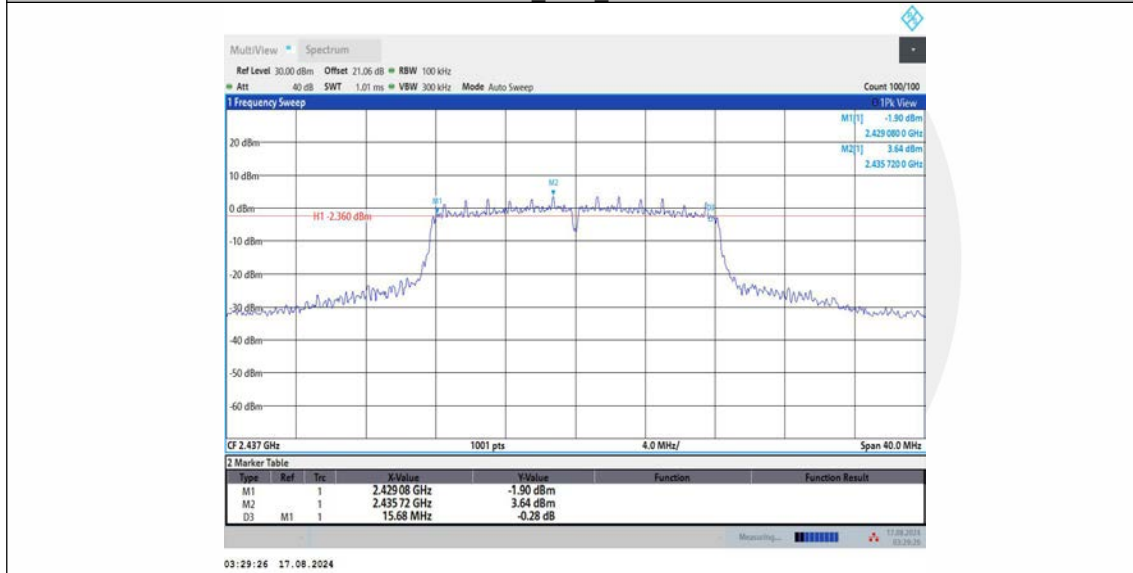


11G_Ant2_2437

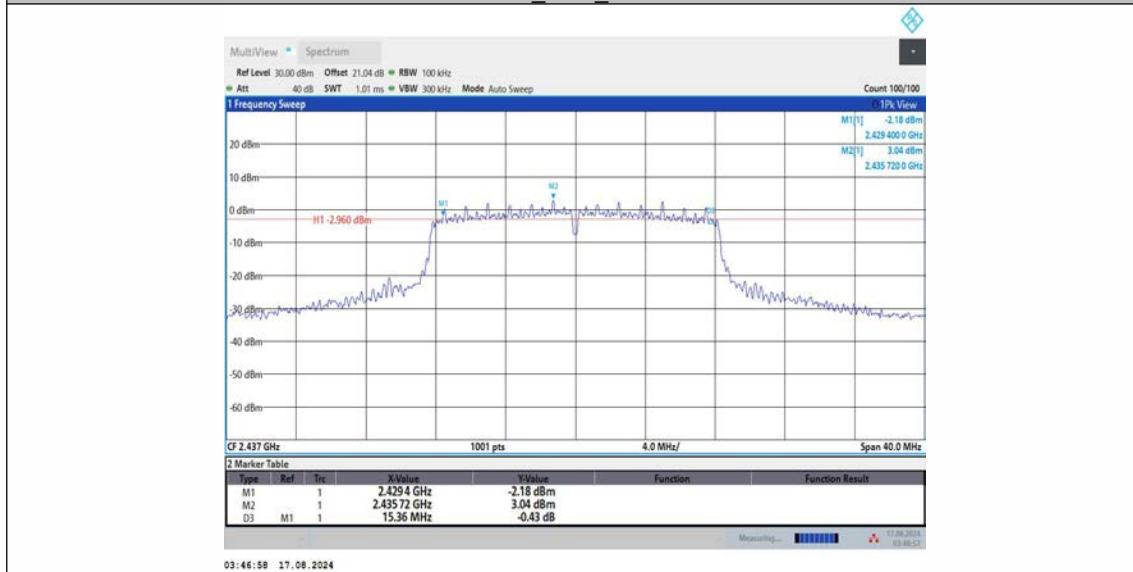


11G_Ant1_2462




11G_Ant2_2462

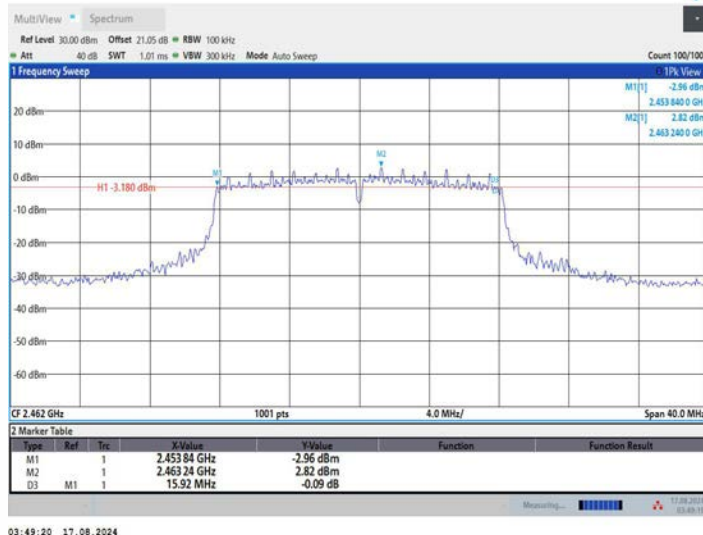


11N20MIMO_Ant1_2412

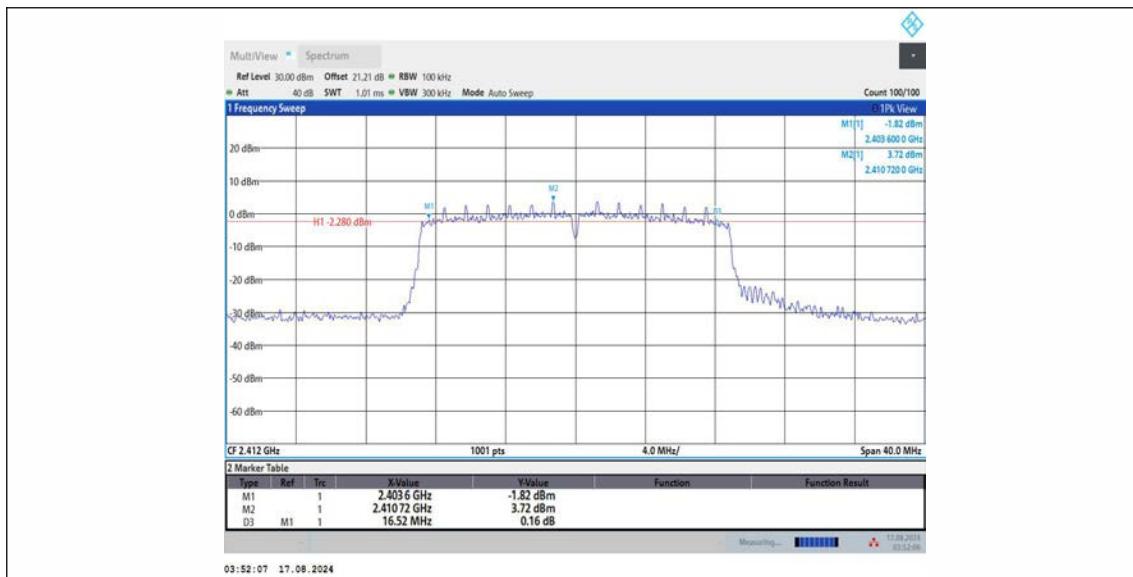


11N20MIMO_Ant2_2412

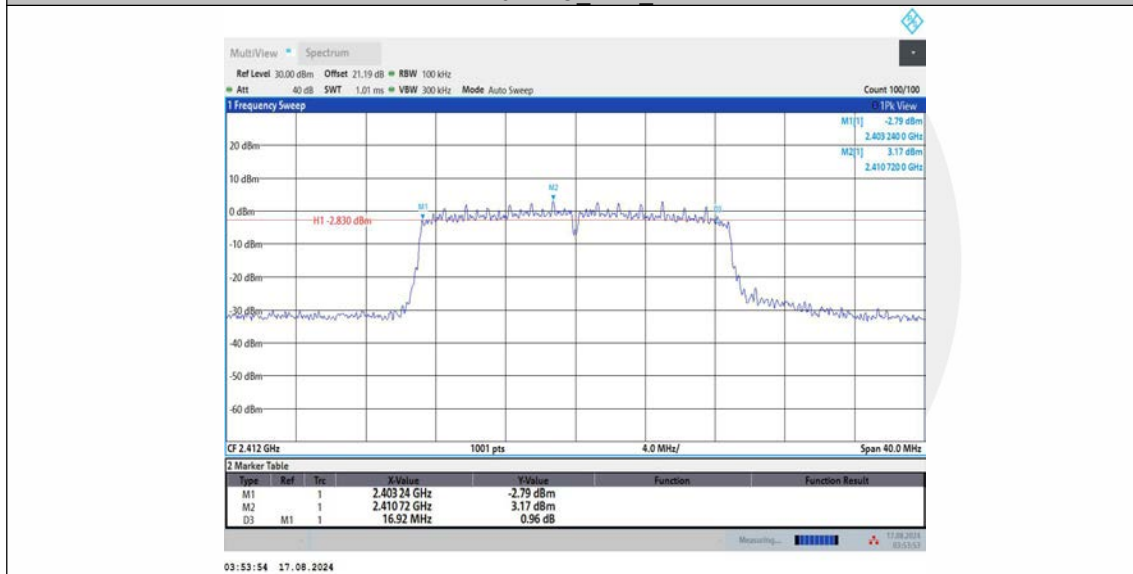


11N20MIMO_Ant1_2437

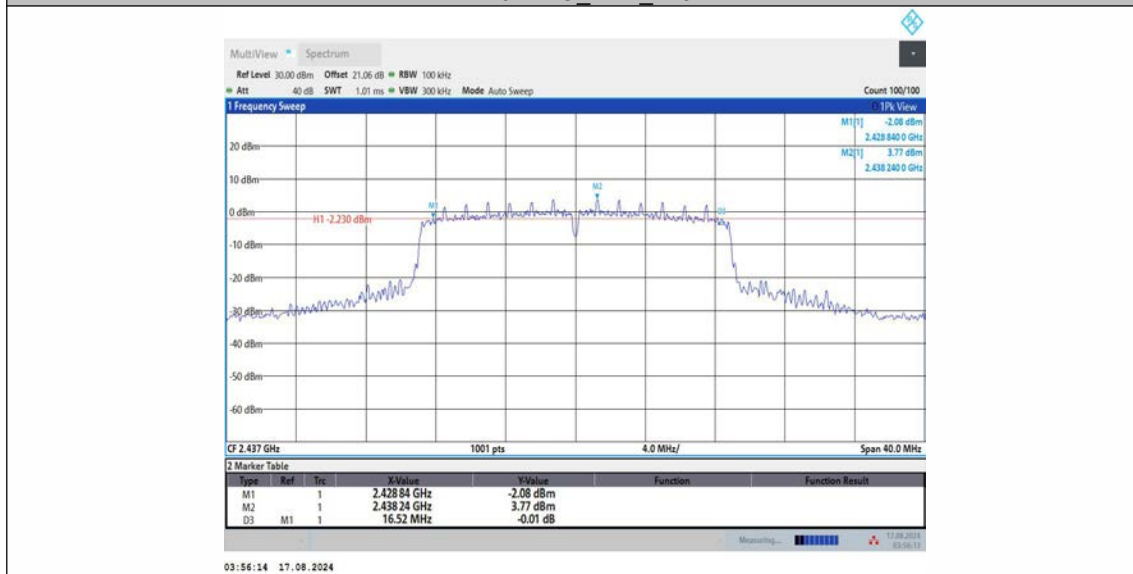


11N20MIMO_Ant2_2437

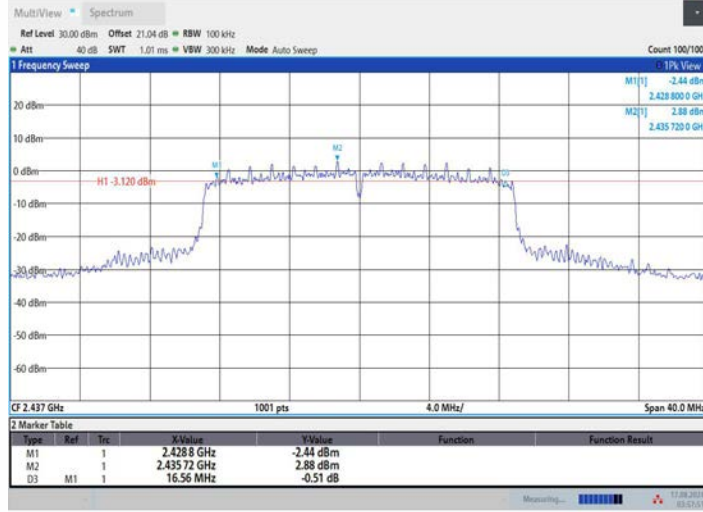


11N20MIMO_Ant1_2462

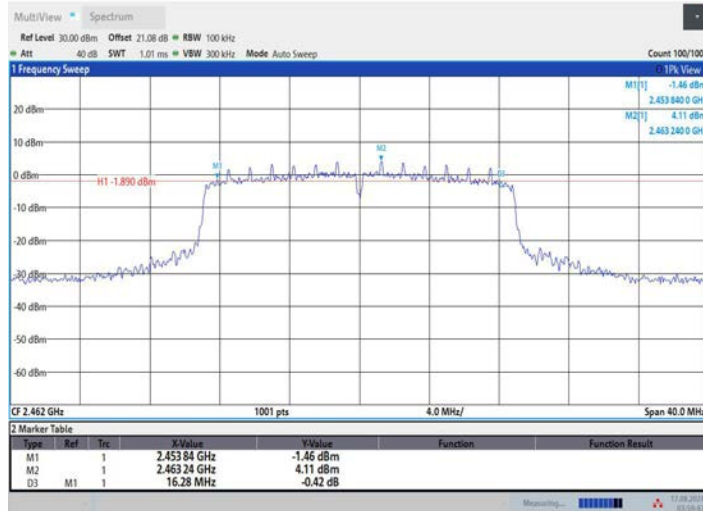


11N20MIMO_Ant2_2462

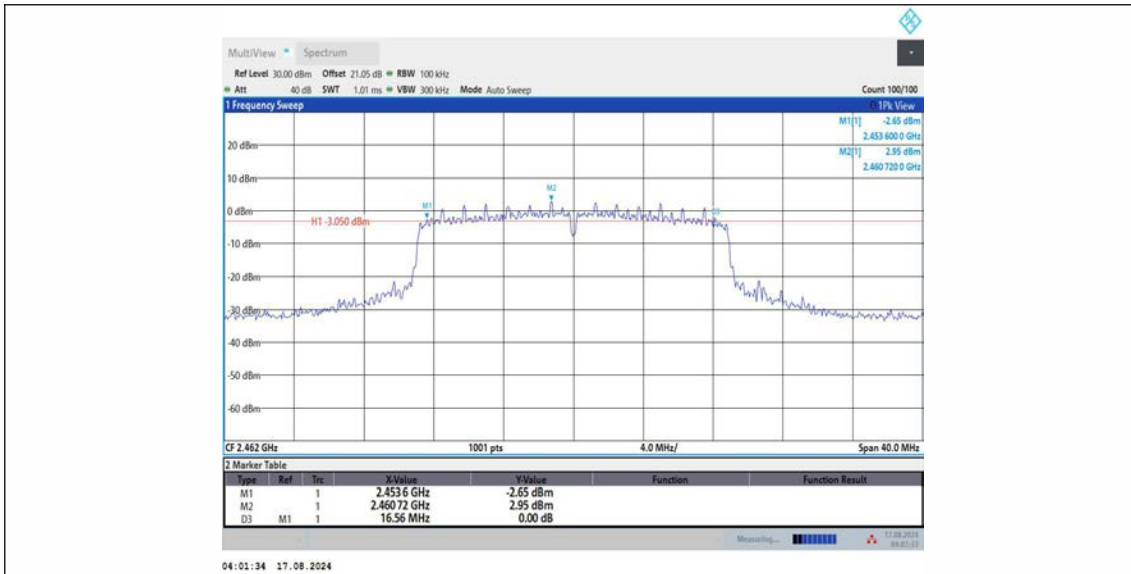


11N40MIMO_Ant1_2422

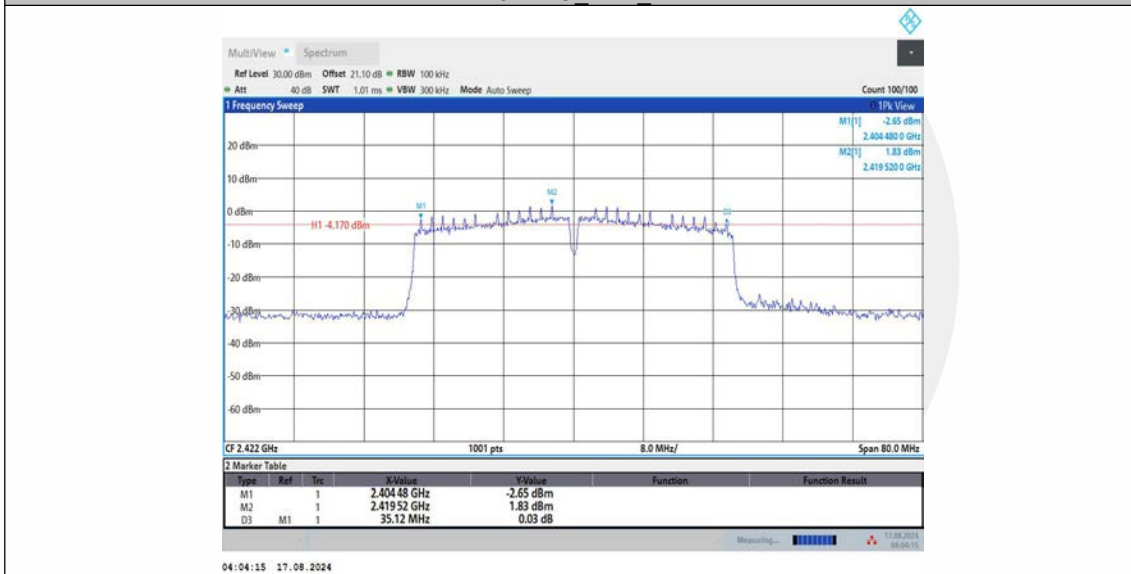

11N40MIMO_Ant2_2422

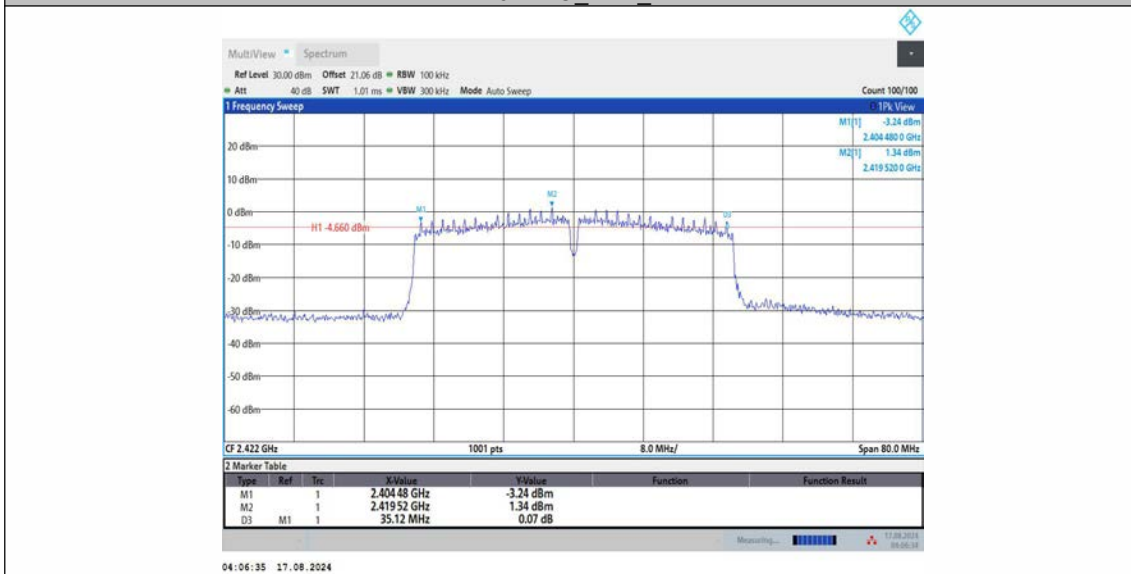


11N40MIMO_Ant1_2437

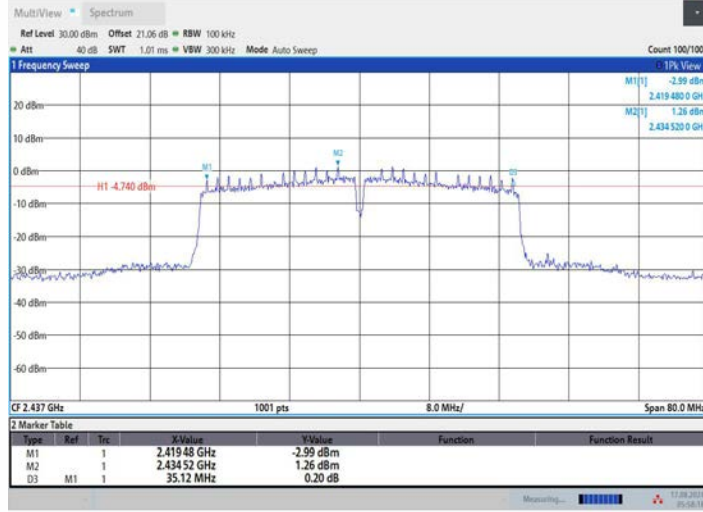


05:58:19 17.08.2024

11N40MIMO_Ant2_2437

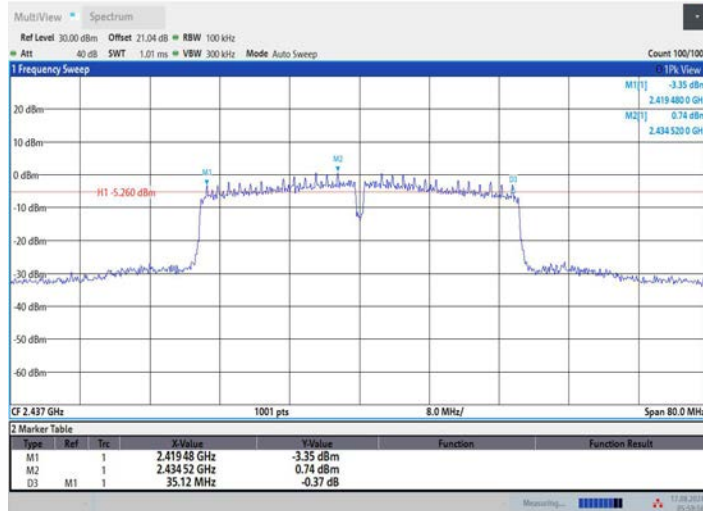


05:59:56 17.08.2024

11N40MIMO_Ant1_2452

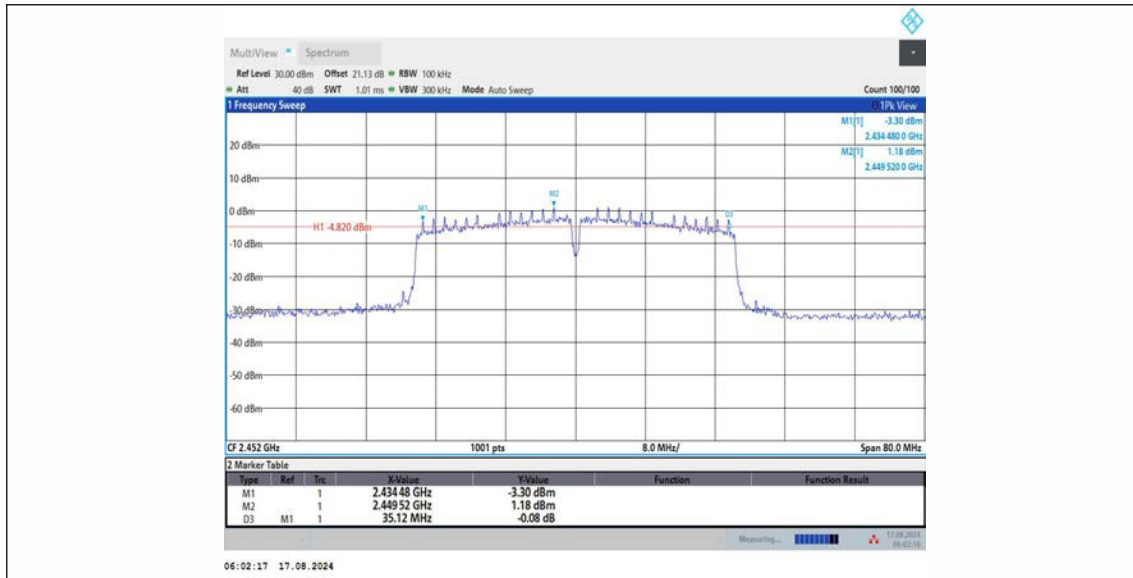


11N40MIMO_Ant2_2452

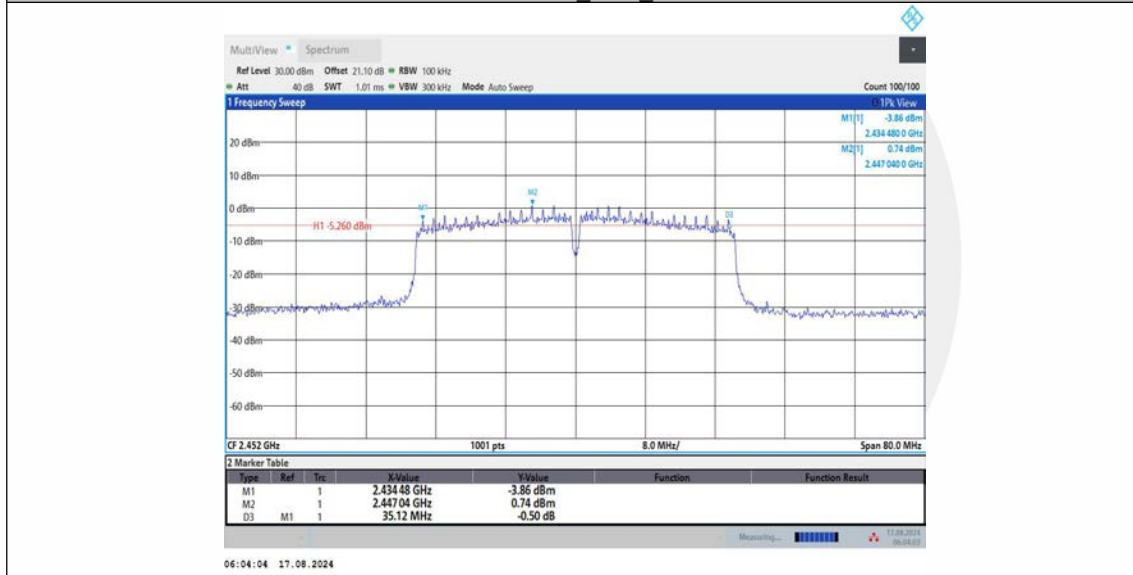

11AX20MIMO_Ant1_2412




11AX20MIMO_Ant2_2412

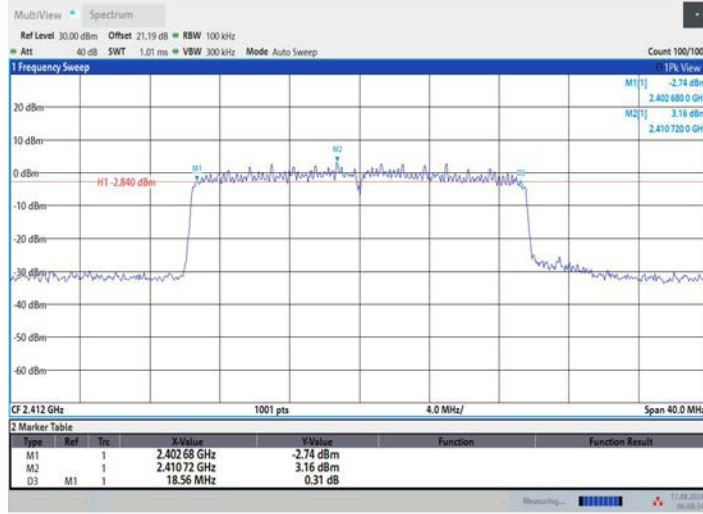


06:08:35 17.08.2024

11AX20MIMO_Ant1_2437

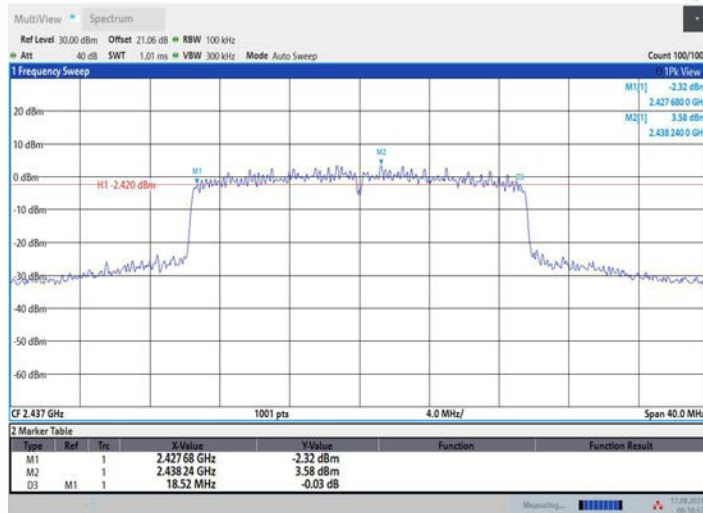


06:10:57 17.08.2024

11AX20MIMO_Ant2_2437

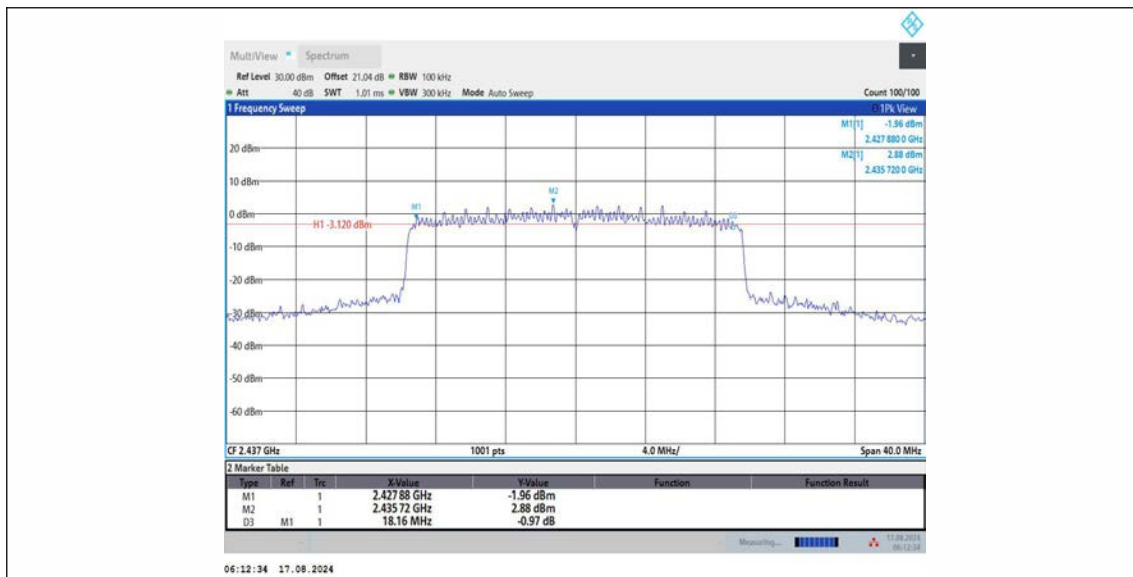


06:12:34 17.08.2024

11AX20MIMO_Ant1_2462

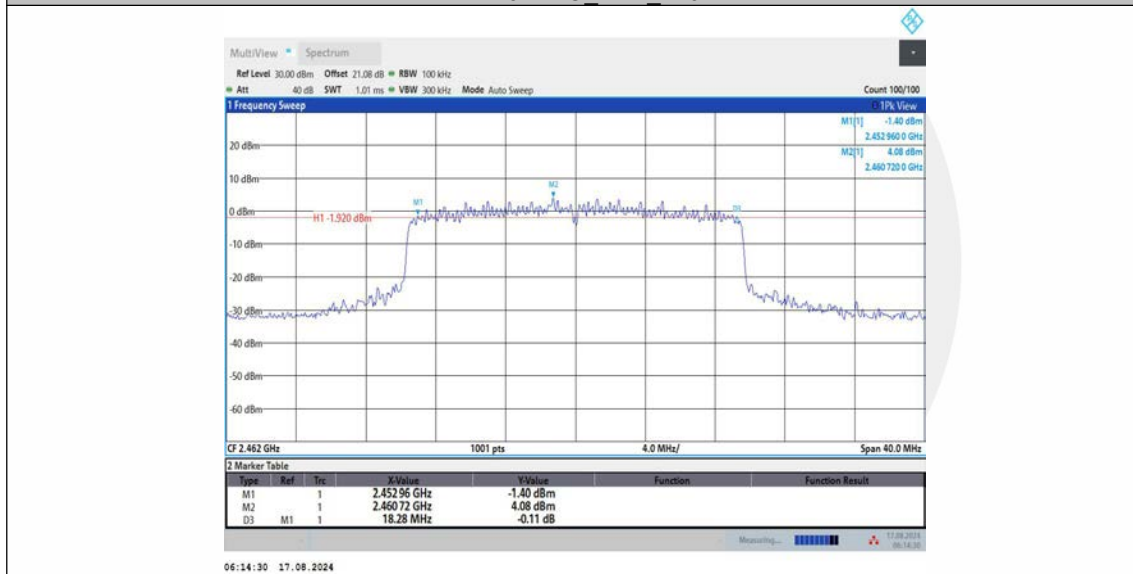


06:14:30 17.08.2024

11AX20MIMO_Ant2_2462

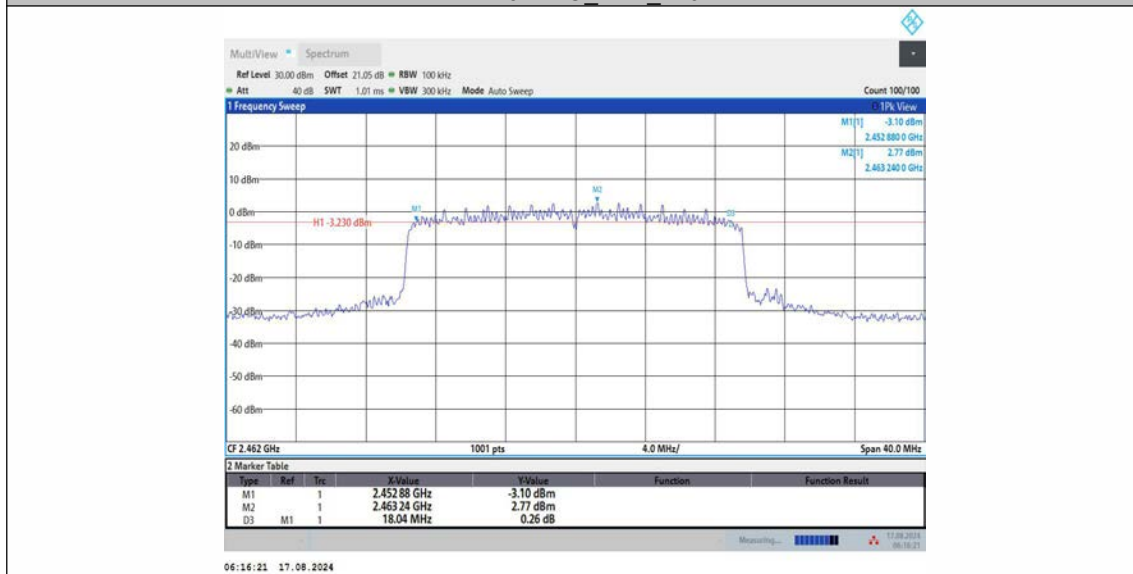


06:16:21 17.08.2024

11AX40MIMO_Ant1_2422

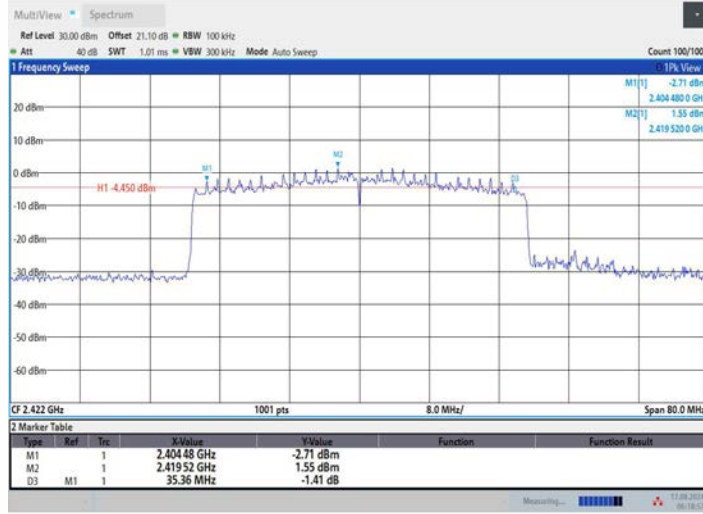


06:18:58 17.08.2024

11AX40MIMO_Ant2_2422

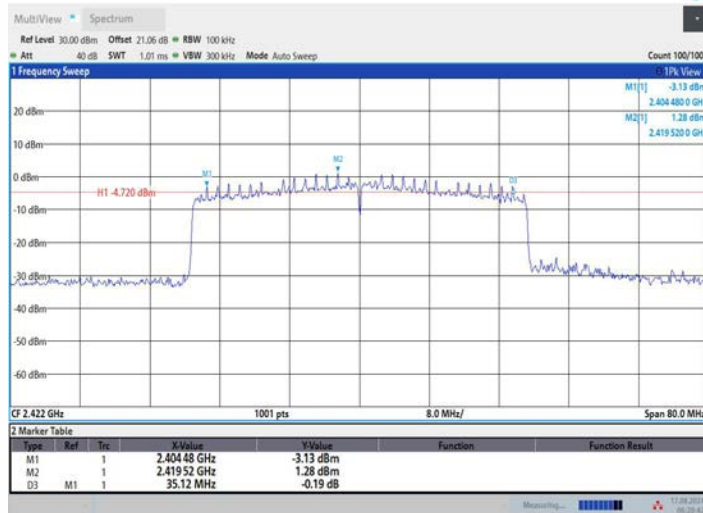

06:20:43 17.08.2024

11AX40MIMO_Ant1_2437

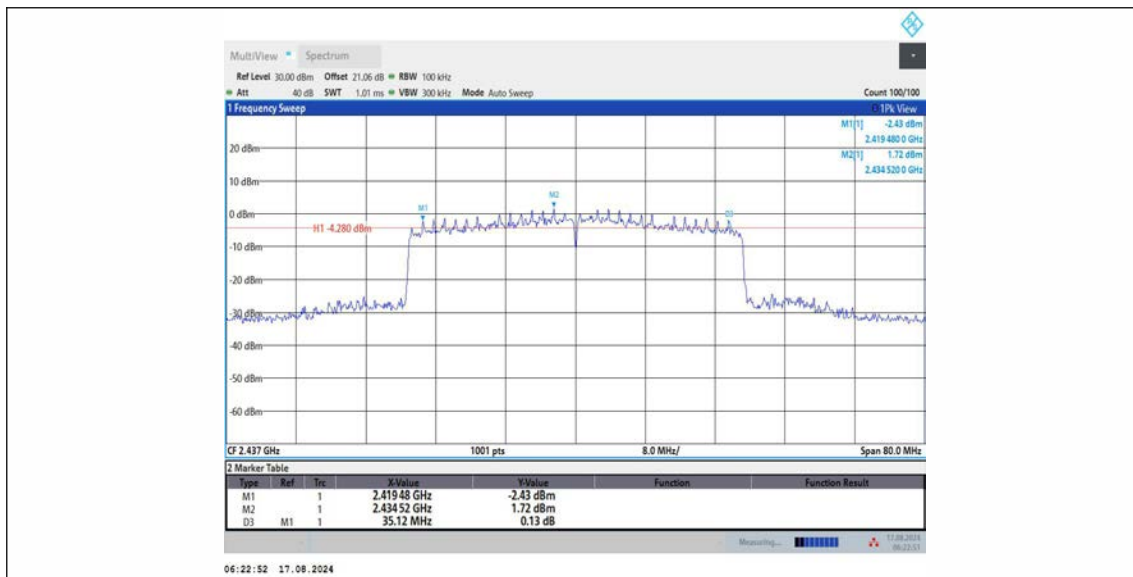


11AX40MIMO_Ant2_2437




11AX40MIMO_Ant1_2452




11AX40MIMO_Ant2_2452

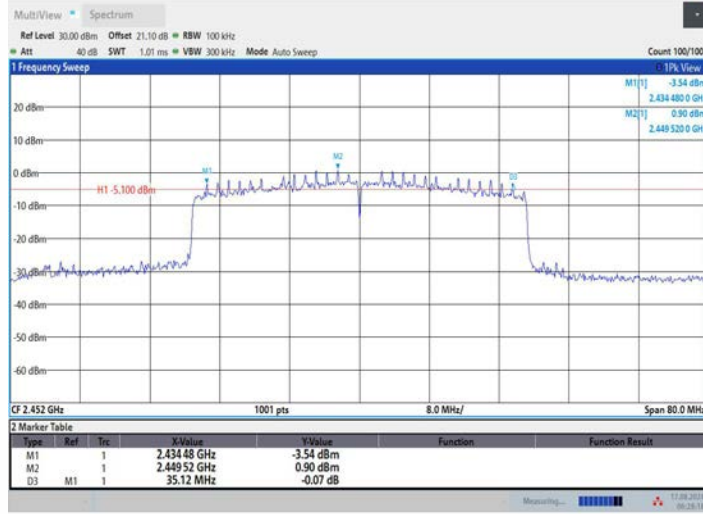


11BE20MIMO_Ant1_2412

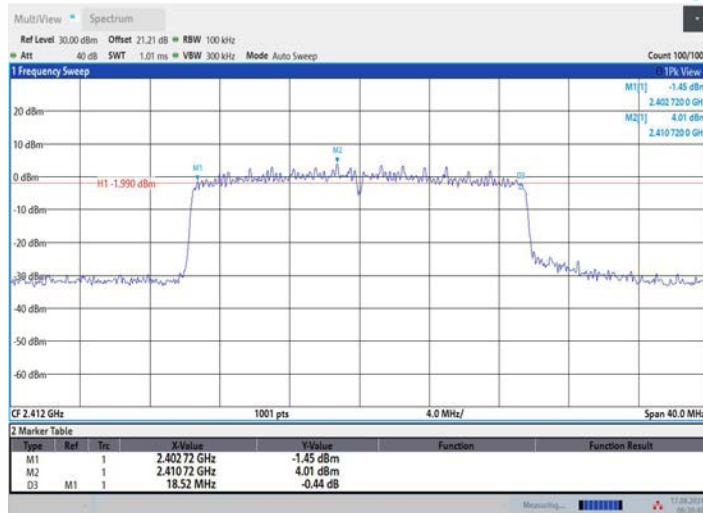


11BE20MIMO_Ant2_2412

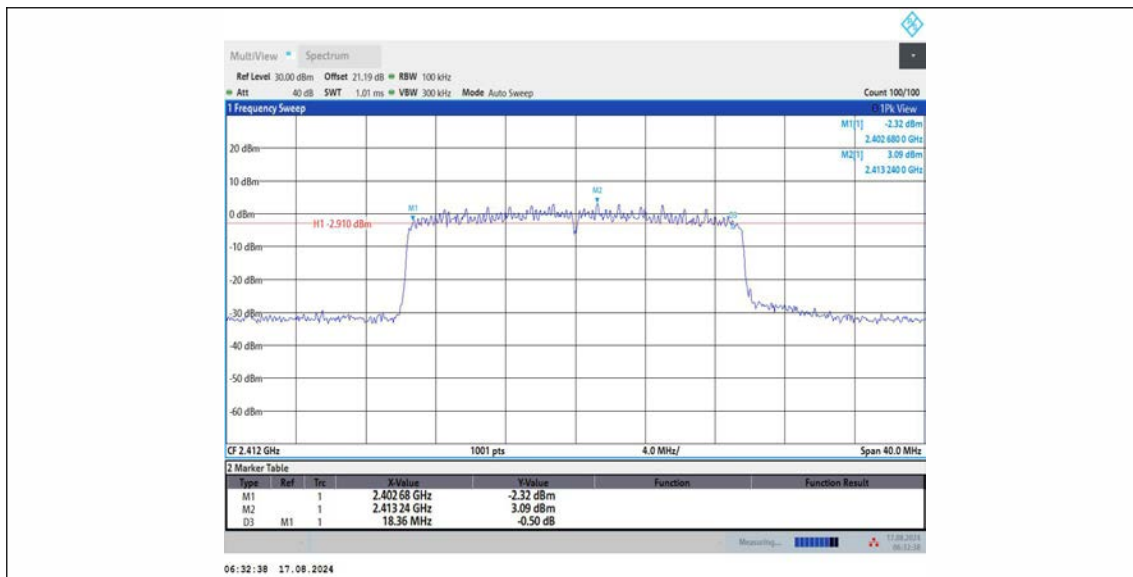


11BE20MIMO_Ant1_2437

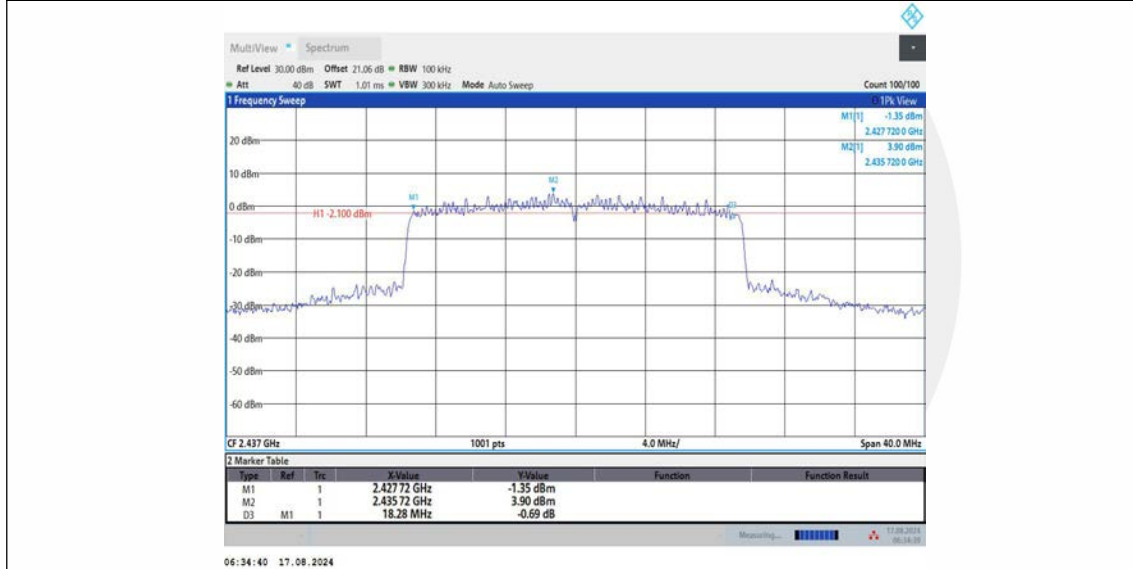

11BE20MIMO_Ant2_2437

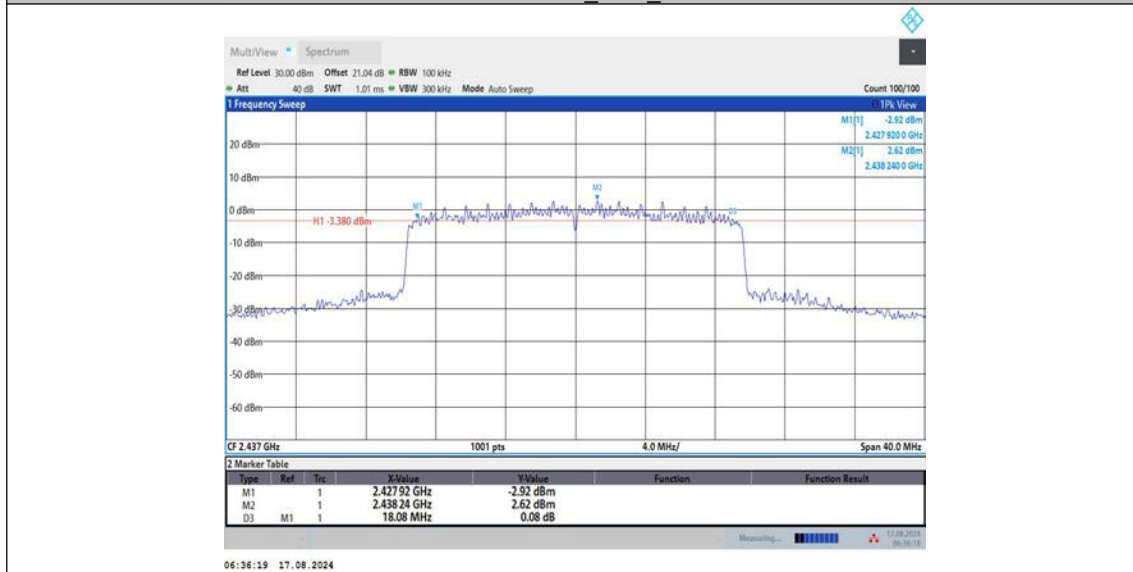

11BE20MIMO_Ant1_2462

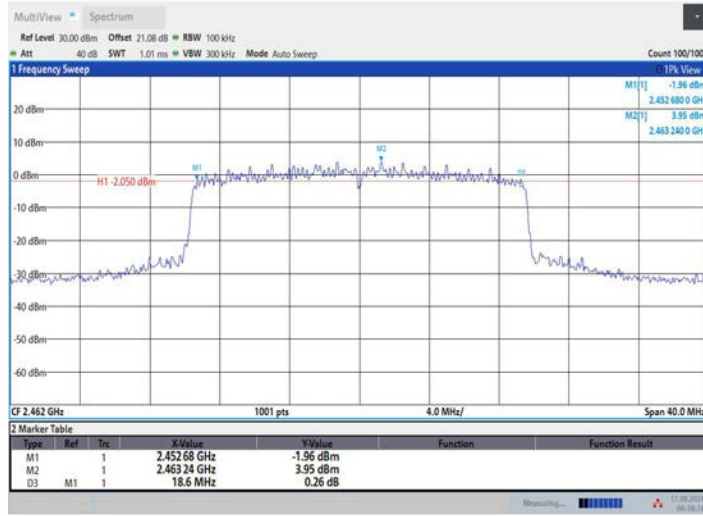


06:38:17 17.08.2024

11BE20MIMO_Ant2_2462




06:40:22 17.08.2024


11BE40MIMO_Ant1_2422

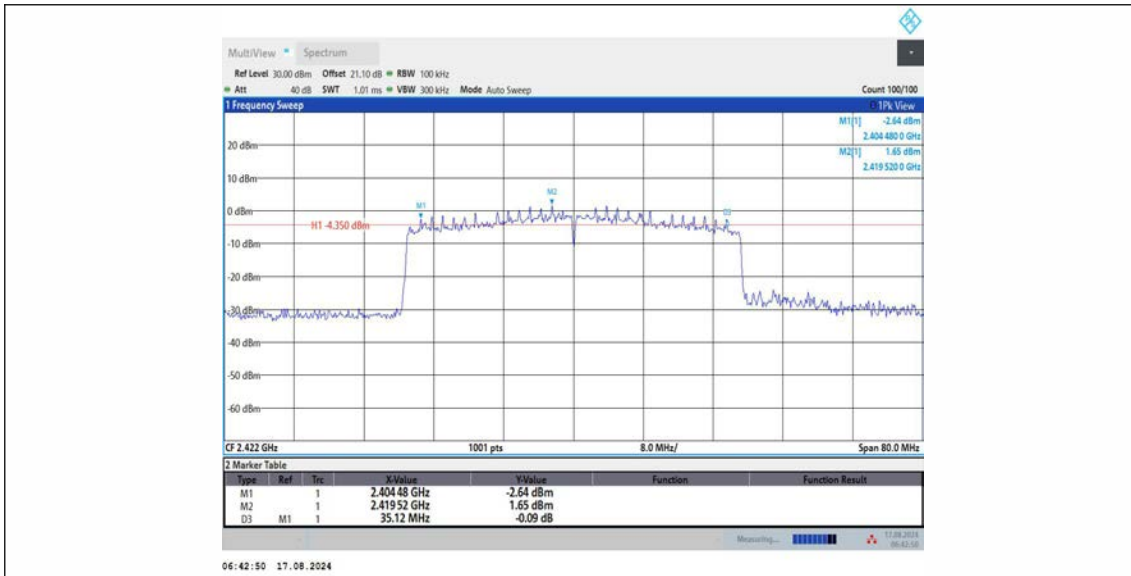


11BE40MIMO_Ant2_2422

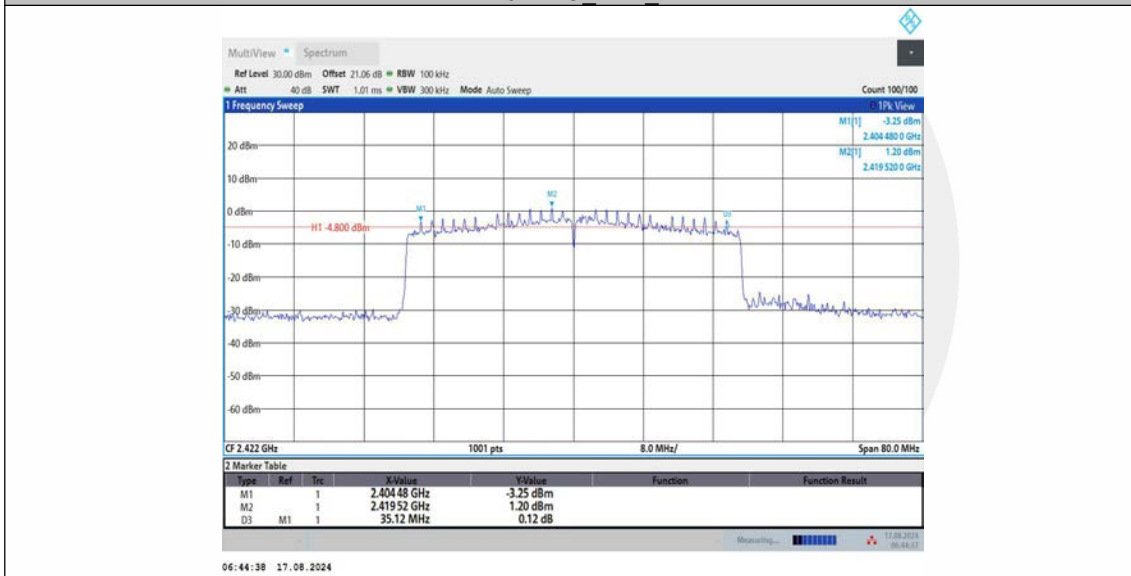


11BE40MIMO_Ant1_2437

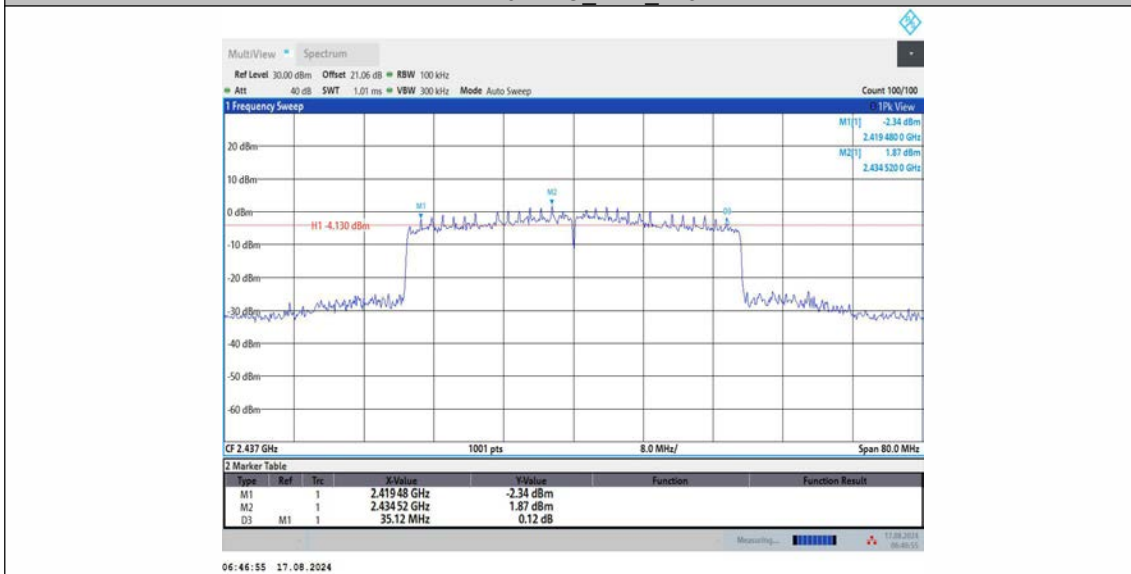


11BE40MIMO_Ant2_2437

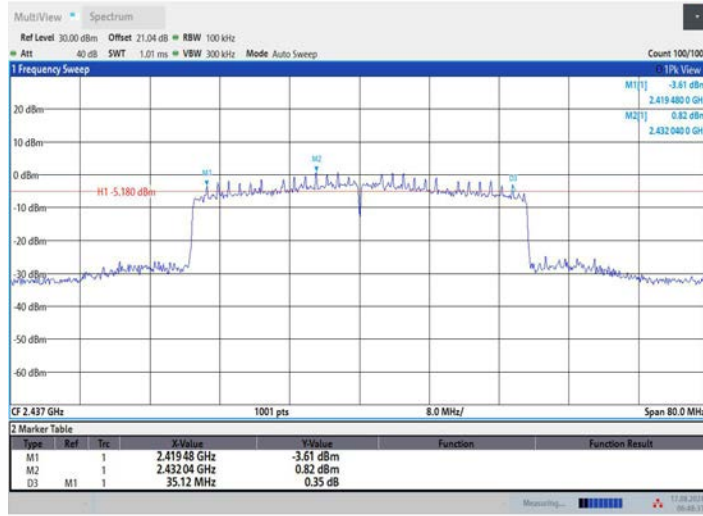

11BE40MIMO_Ant1_2452

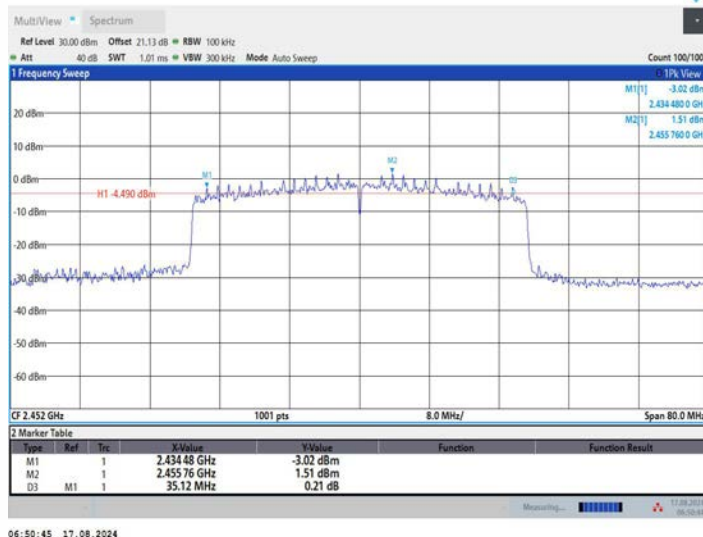

11BE40MIMO_Ant2_2452

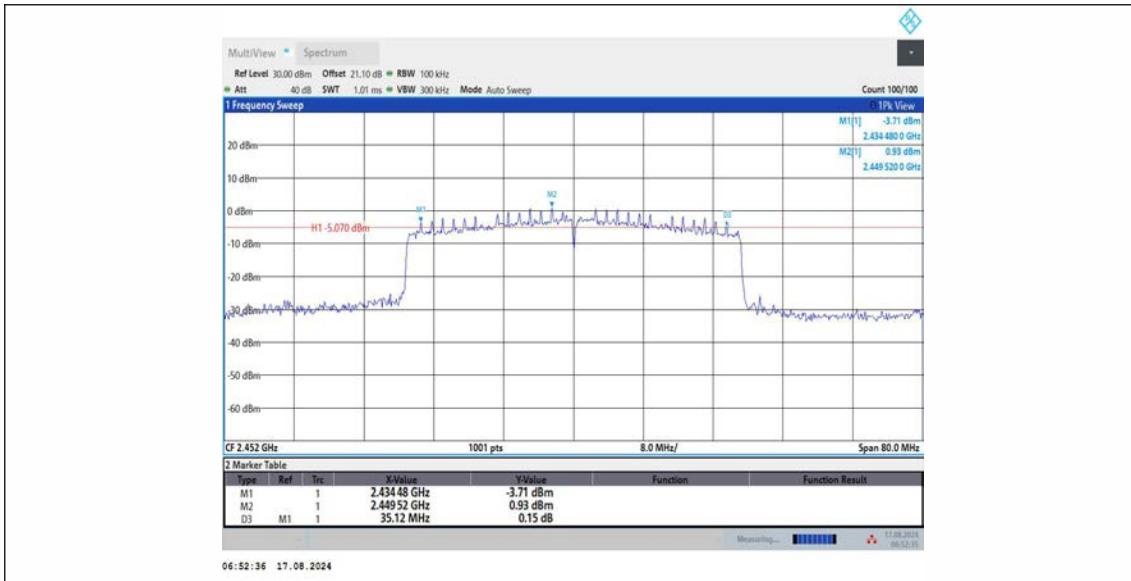

7.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.2.1 Applicable Standard

According to FCC Part 15.247 (b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.2.2 Conformance Limit

The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

7.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup.

7.2.4 Test Procedure

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6).

7.2.5 Test Results

Temperature :	25°C	ATM Pressure:	1011 mbar
Humidity :	45 %	Test Engineer:	GJ


Test Mode	Antenna	Frequency[MHz]	Set Power	Peak Power [dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	15	14.51	≤30.00	17.35	≤36.00	PASS
11B	Ant2	2412	15	13.85	≤30.00	16.26	≤36.00	PASS
11B	Ant1	2437	15	14.37	≤30.00	17.21	≤36.00	PASS
11B	Ant2	2437	15	13.53	≤30.00	15.94	≤36.00	PASS
11B	Ant1	2462	15	14.6	≤30.00	17.44	≤36.00	PASS
11B	Ant2	2462	15	13.52	≤30.00	15.93	≤36.00	PASS
11G	Ant1	2412	15	14.6	≤30.00	17.44	≤36.00	PASS
11G	Ant2	2412	15	13.99	≤30.00	16.4	≤36.00	PASS
11G	Ant1	2437	15	14.47	≤30.00	17.31	≤36.00	PASS
11G	Ant2	2437	15	13.59	≤30.00	16	≤36.00	PASS
11G	Ant1	2462	15	14.67	≤30.00	17.51	≤36.00	PASS
11G	Ant2	2462	15	13.53	≤30.00	15.94	≤36.00	PASS
11N20	Ant1	2412	15	14.61	≤30.00	17.45	≤36.00	PASS
11N20	Ant2	2412	15	13.96	≤30.00	16.37	≤36.00	PASS
11N20	total	2412	15	17.31	≤30.00	20.15	≤36.00	PASS
11N20	Ant1	2437	15	14.47	≤30.00	17.31	≤36.00	PASS
11N20	Ant2	2437	15	13.48	≤30.00	15.89	≤36.00	PASS
11N20	total	2437	15	17.01	≤30.00	19.85	≤36.00	PASS
11N20	Ant1	2462	15	14.71	≤30.00	17.55	≤36.00	PASS
11N20	Ant2	2462	15	13.41	≤30.00	15.82	≤36.00	PASS
11N20	total	2462	15	17.12	≤30.00	19.96	≤36.00	PASS
11N40	Ant1	2422	15	14.62	≤30.00	17.46	≤36.00	PASS
11N40	Ant2	2422	15	13.9	≤30.00	16.31	≤36.00	PASS
11N40	total	2422	15	17.29	≤30.00	20.13	≤36.00	PASS
11N40	Ant1	2437	15	14.44	≤30.00	17.28	≤36.00	PASS
11N40	Ant2	2437	15	13.75	≤30.00	16.16	≤36.00	PASS
11N40	total	2437	15	17.12	≤30.00	19.96	≤36.00	PASS

11N40	Ant1	2452	15	14.25	≤30.00	17.09	≤36.00	PASS
11N40	Ant2	2452	15	13.7	≤30.00	16.11	≤36.00	PASS
11N40	total	2452	15	16.99	≤30.00	19.83	≤36.00	PASS
11AX20	Ant1	2412	15	14.7	≤30.00	17.54	≤36.00	PASS
11AX20	Ant2	2412	15	14.32	≤30.00	16.73	≤36.00	PASS
11AX20	total	2412	15	17.52	≤30.00	20.36	≤36.00	PASS
11AX20	Ant1	2437	15	14.63	≤30.00	17.47	≤36.00	PASS
11AX20	Ant2	2437	15	13.86	≤30.00	16.27	≤36.00	PASS
11AX20	total	2437	15	17.27	≤30.00	20.11	≤36.00	PASS
11AX20	Ant1	2462	15	14.91	≤30.00	17.75	≤36.00	PASS
11AX20	Ant2	2462	15	13.77	≤30.00	16.18	≤36.00	PASS
11AX20	total	2462	15	17.39	≤30.00	20.23	≤36.00	PASS
11AX40	Ant1	2422	15	14.81	≤30.00	17.65	≤36.00	PASS
11AX40	Ant2	2422	15	14.29	≤30.00	16.7	≤36.00	PASS
11AX40	total	2422	15	17.57	≤30.00	20.41	≤36.00	PASS
11AX40	Ant1	2437	15	15.07	≤30.00	17.91	≤36.00	PASS
11AX40	Ant2	2437	15	14.15	≤30.00	16.56	≤36.00	PASS
11AX40	total	2437	15	17.64	≤30.00	20.48	≤36.00	PASS
11AX40	Ant1	2452	15	14.85	≤30.00	17.69	≤36.00	PASS
11AX40	Ant2	2452	15	14.09	≤30.00	16.5	≤36.00	PASS
11AX40	total	2452	15	17.5	≤30.00	20.34	≤36.00	PASS
11BE20	Ant1	2412	15	14.95	≤30.00	17.79	≤36.00	PASS
11BE20	Ant2	2412	15	14.37	≤30.00	16.78	≤36.00	PASS
11BE20	total	2412	15	17.68	≤30.00	20.52	≤36.00	PASS
11BE20	Ant1	2437	15	14.79	≤30.00	17.63	≤36.00	PASS
11BE20	Ant2	2437	15	13.88	≤30.00	16.29	≤36.00	PASS
11BE20	total	2437	15	17.37	≤30.00	20.21	≤36.00	PASS
11BE20	Ant1	2462	15	15.01	≤30.00	17.85	≤36.00	PASS
11BE20	Ant2	2462	15	13.81	≤30.00	16.22	≤36.00	PASS
11BE20	total	2462	15	17.46	≤30.00	20.3	≤36.00	PASS


11BE40	Ant1	2422	15	14.85	≤30.00	17.69	≤36.00	PASS
11BE40	Ant2	2422	15	14.25	≤30.00	16.66	≤36.00	PASS
11BE40	total	2422	15	17.57	≤30.00	20.41	≤36.00	PASS
11BE40	Ant1	2437	15	15.07	≤30.00	17.91	≤36.00	PASS
11BE40	Ant2	2437	15	14.13	≤30.00	16.54	≤36.00	PASS
11BE40	total	2437	15	17.64	≤30.00	20.48	≤36.00	PASS
11BE40	Ant1	2452	15	14.86	≤30.00	17.7	≤36.00	PASS
11BE40	Ant2	2452	15	14.12	≤30.00	16.53	≤36.00	PASS
11BE40	total	2452	15	17.52	≤30.00	20.36	≤36.00	PASS




11B_Ant1_2412

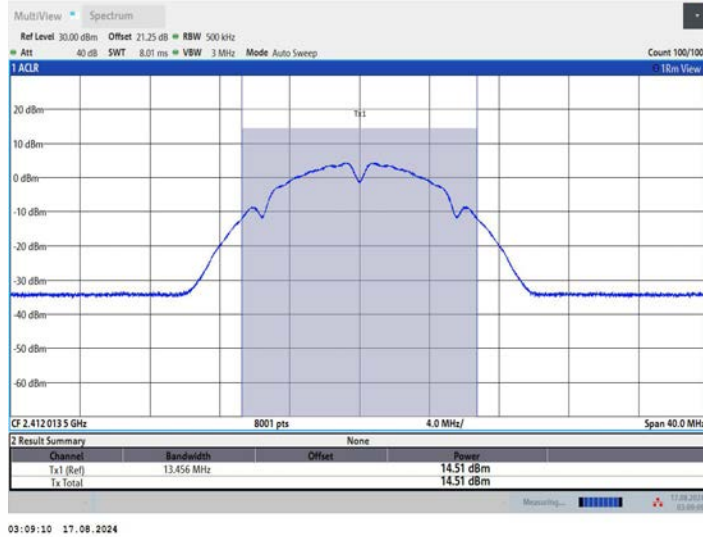


11B_Ant2_2412

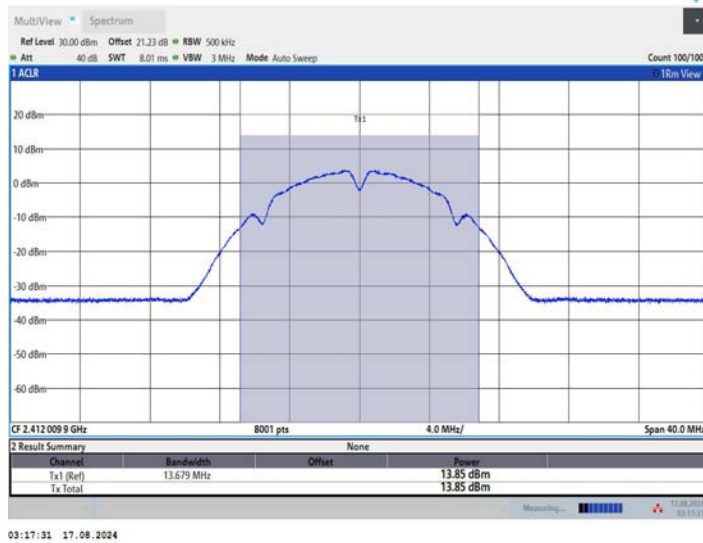


11B_Ant1_2437

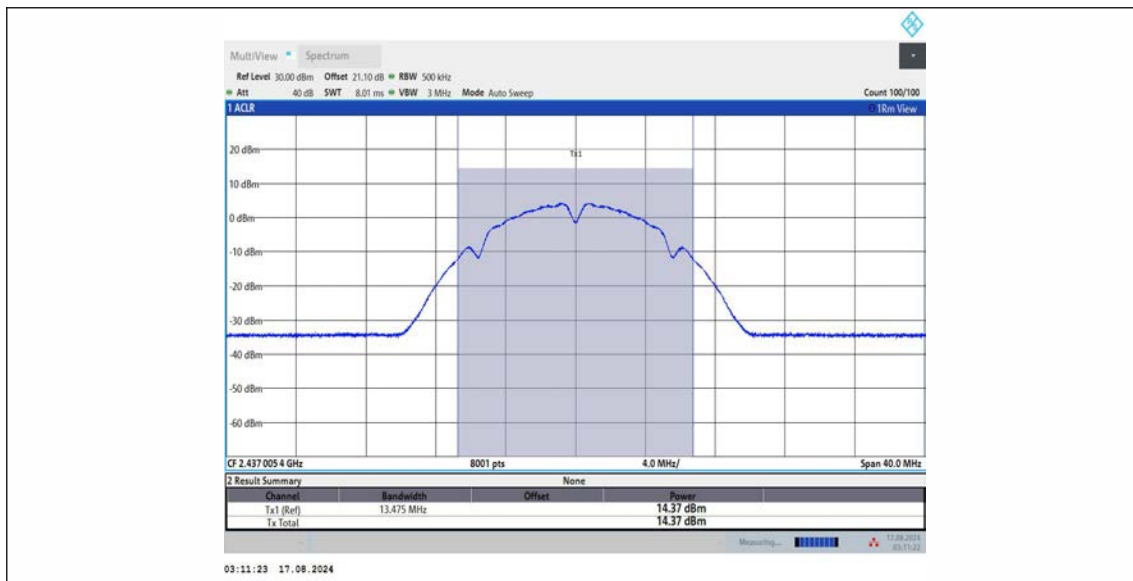


11B_Ant2_2437

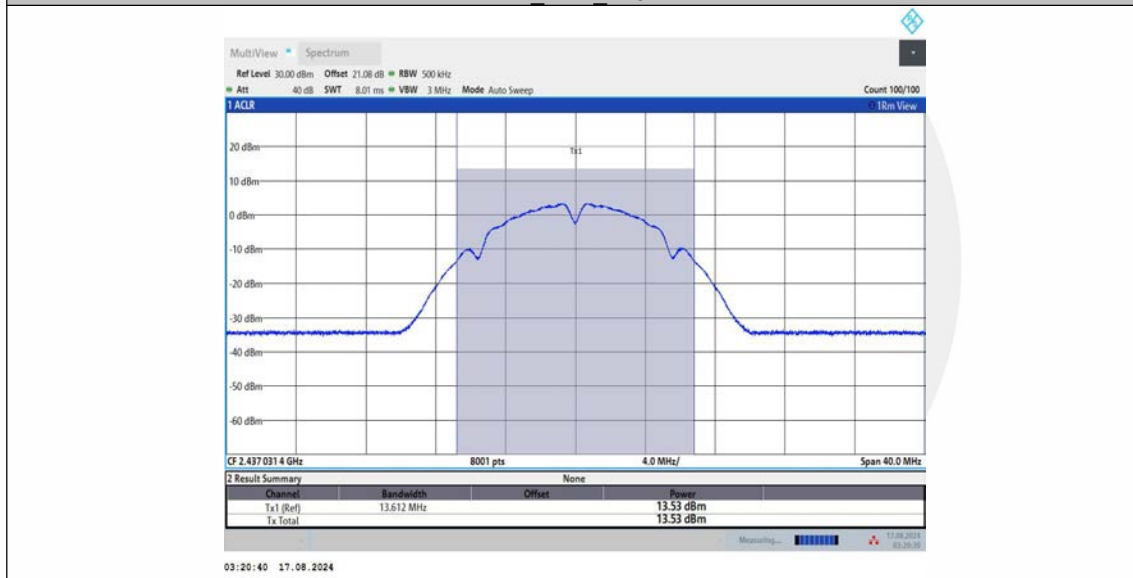


11B_Ant1_2462

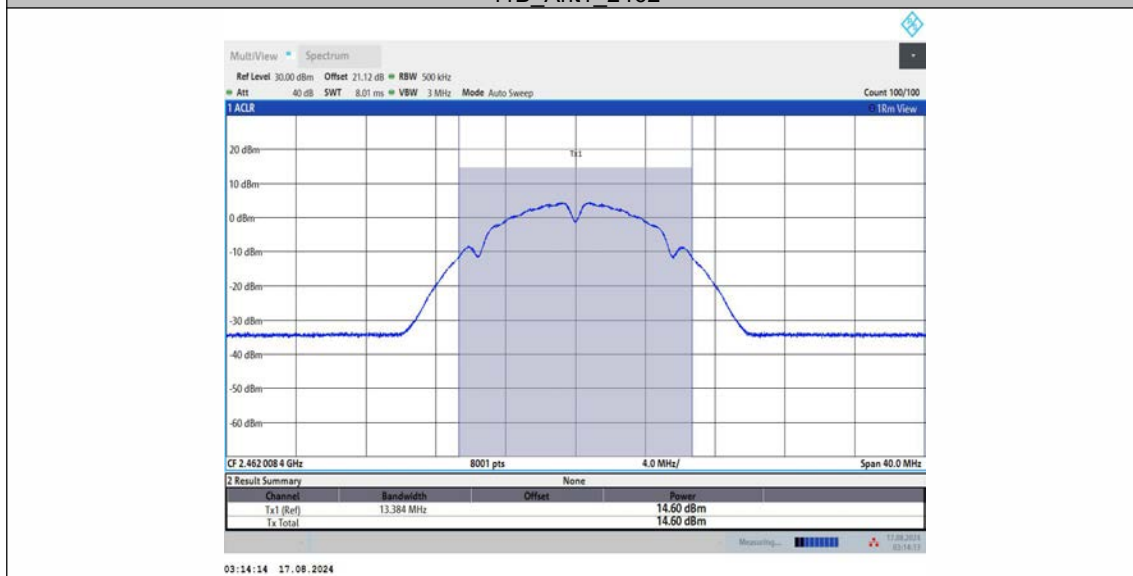


11B_Ant2_2462

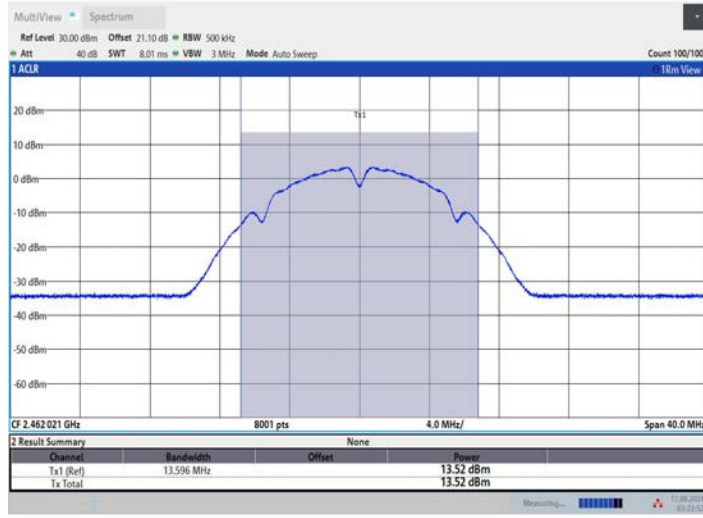


11G_Ant1_2412

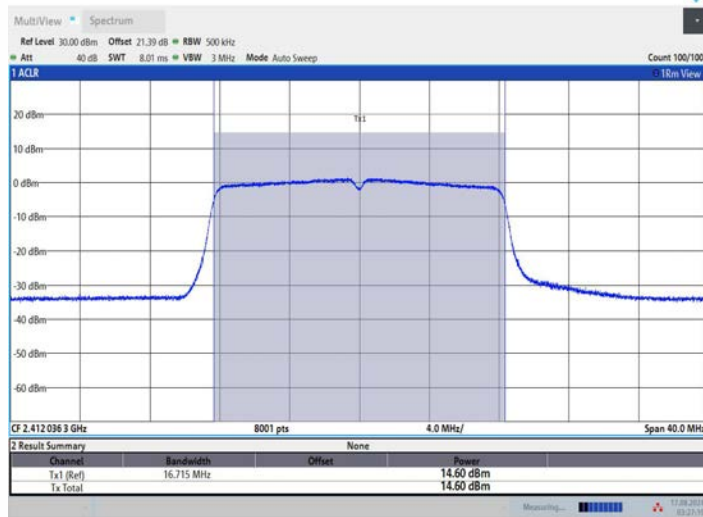


11G_Ant2_2412

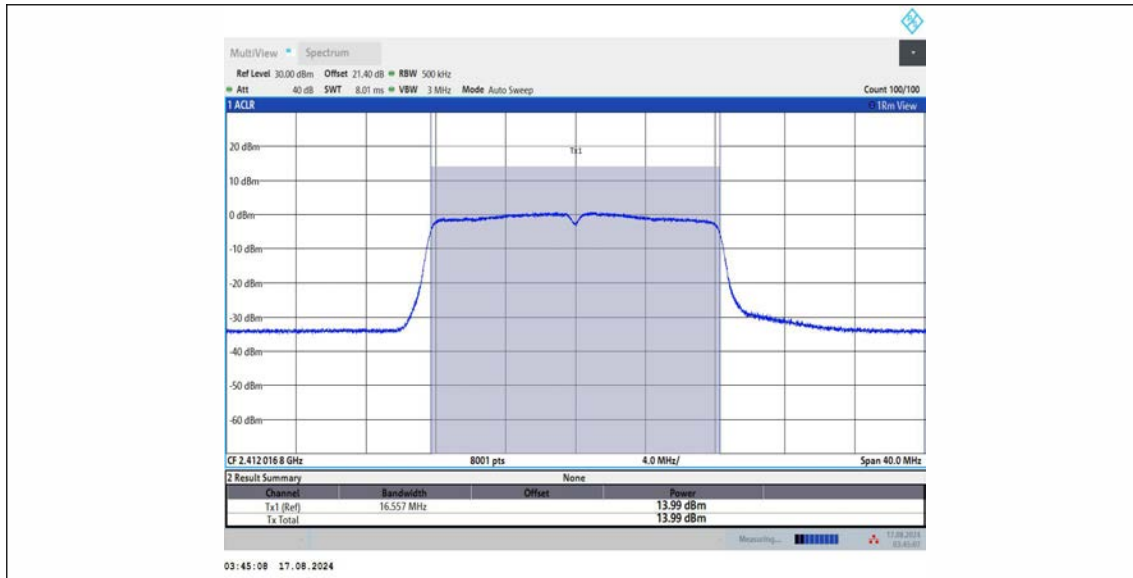


11G_Ant1_2437

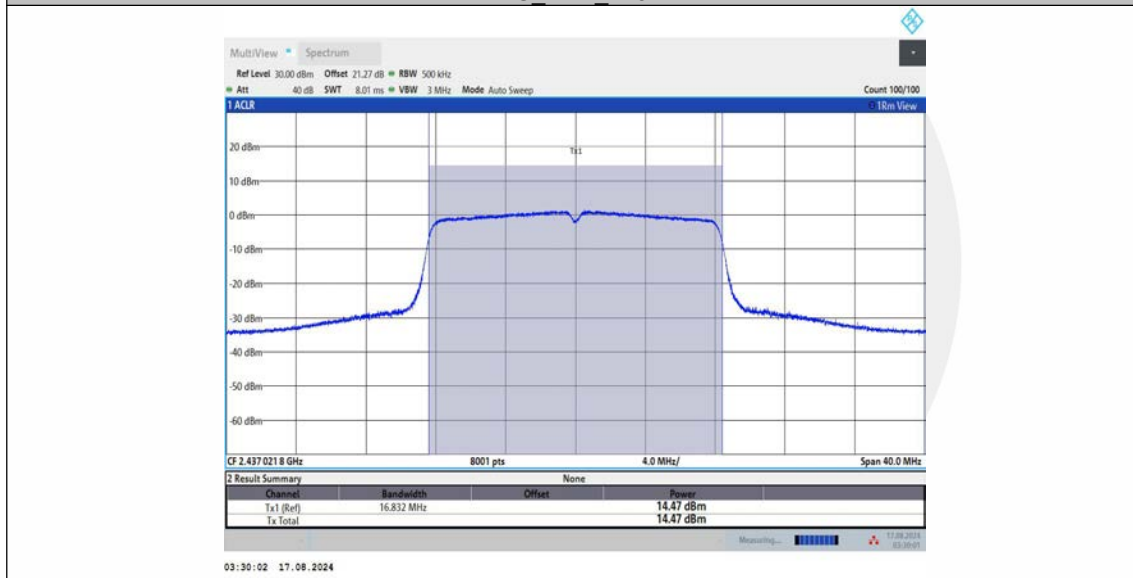


11G_Ant2_2437

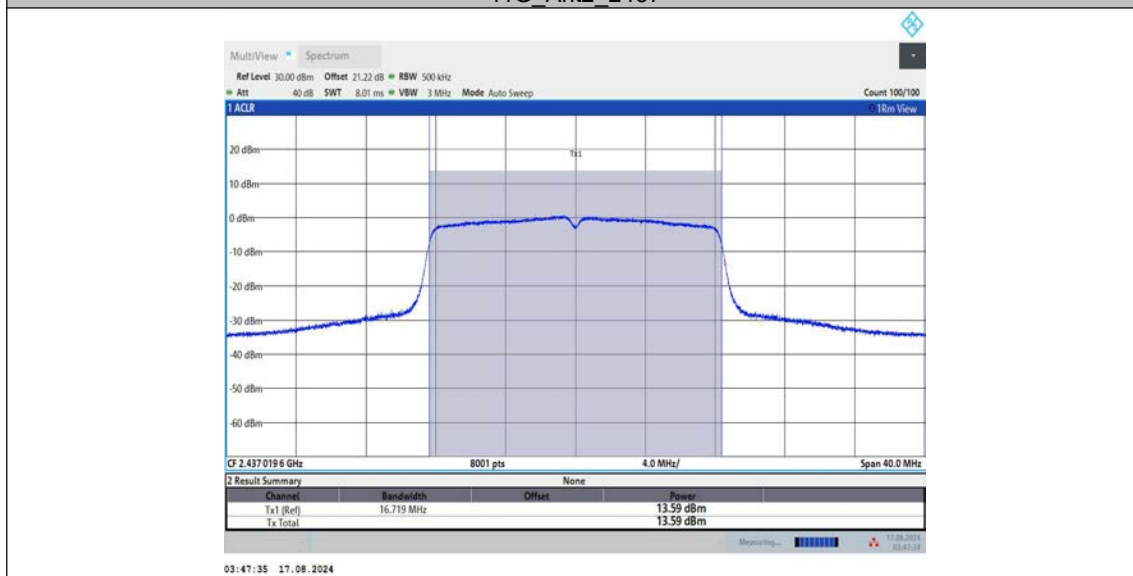


11G_Ant1_2462

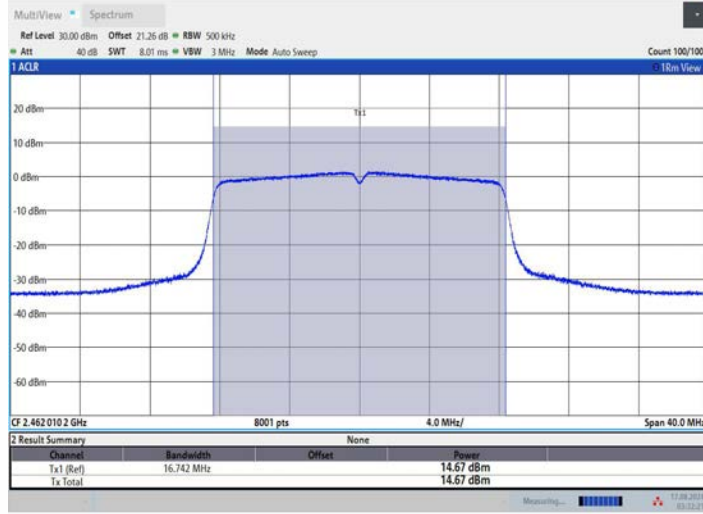


11G_Ant2_2462

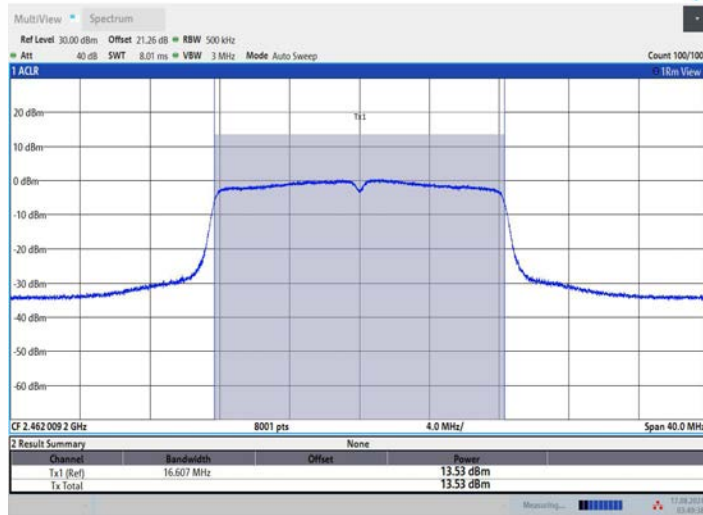


11N20MIMO_Ant1_2412

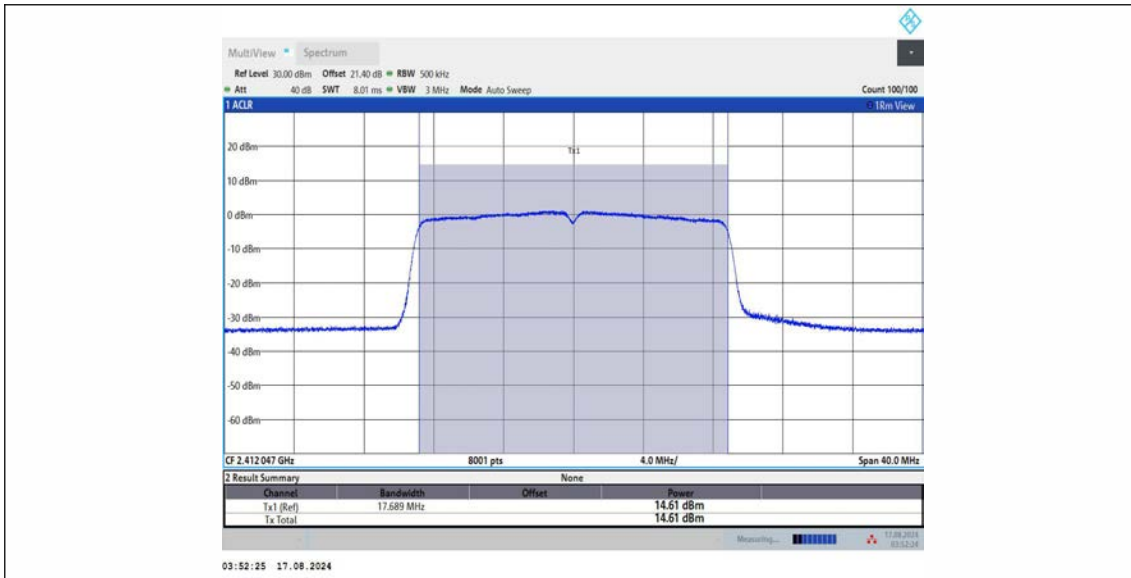


11N20MIMO_Ant2_2412

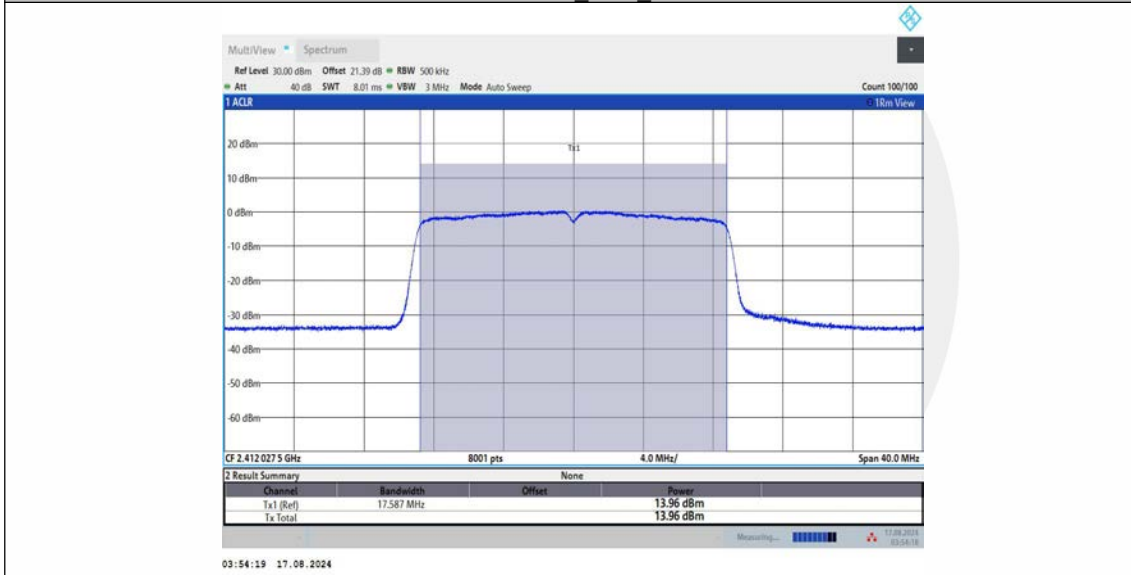


11N20MIMO_Ant1_2437

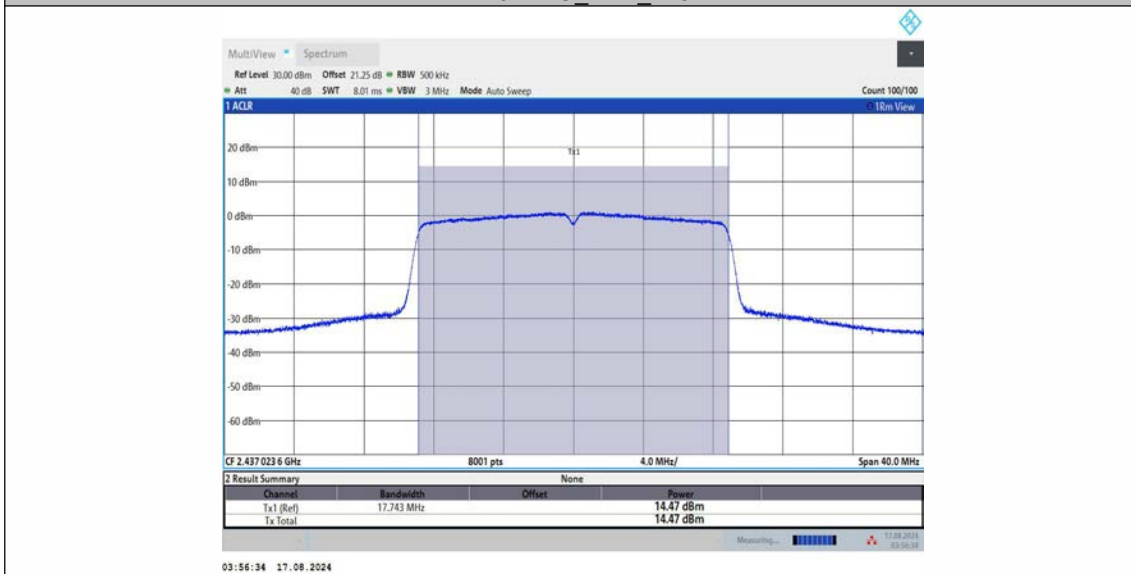


11N20MIMO_Ant2_2437

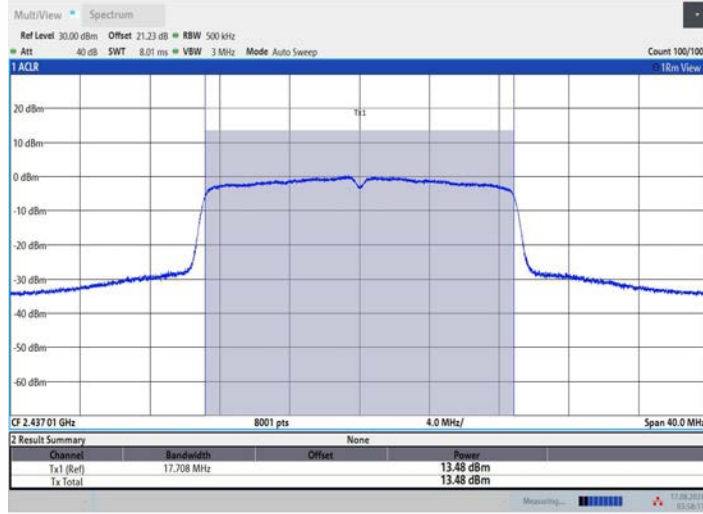


11N20MIMO_Ant1_2462

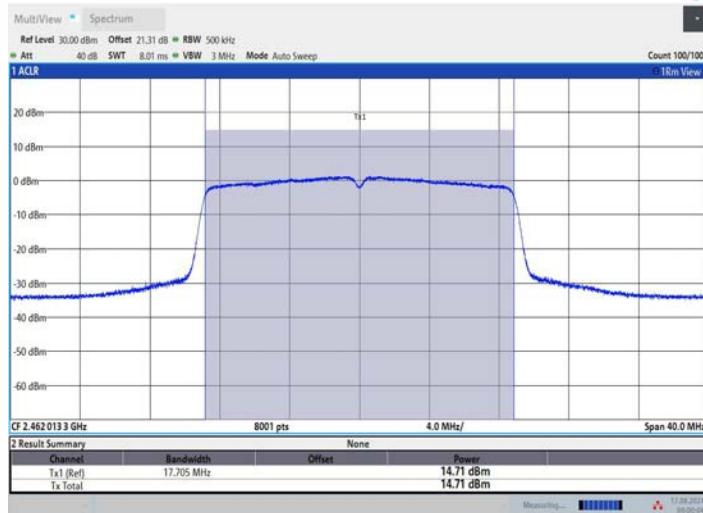


11N20MIMO_Ant2_2462

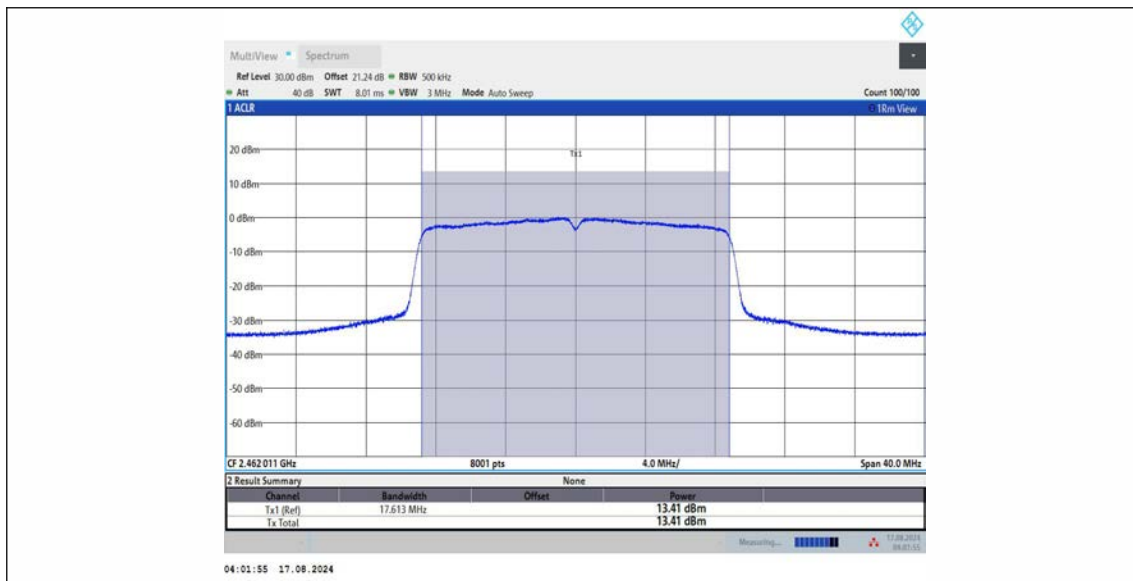


11N40MIMO_Ant1_2422

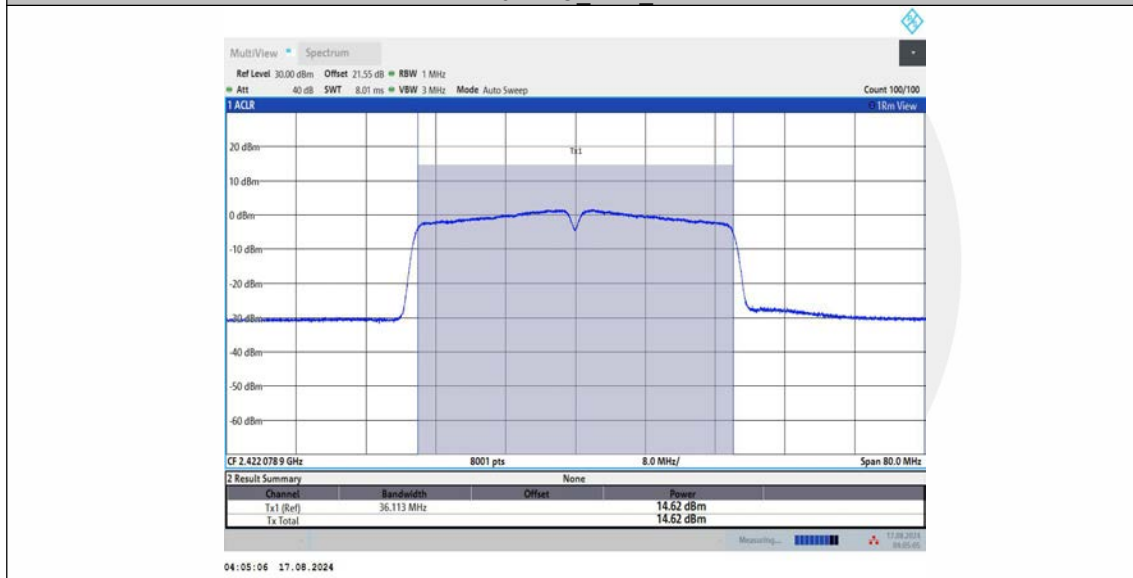


11N40MIMO_Ant2_2422

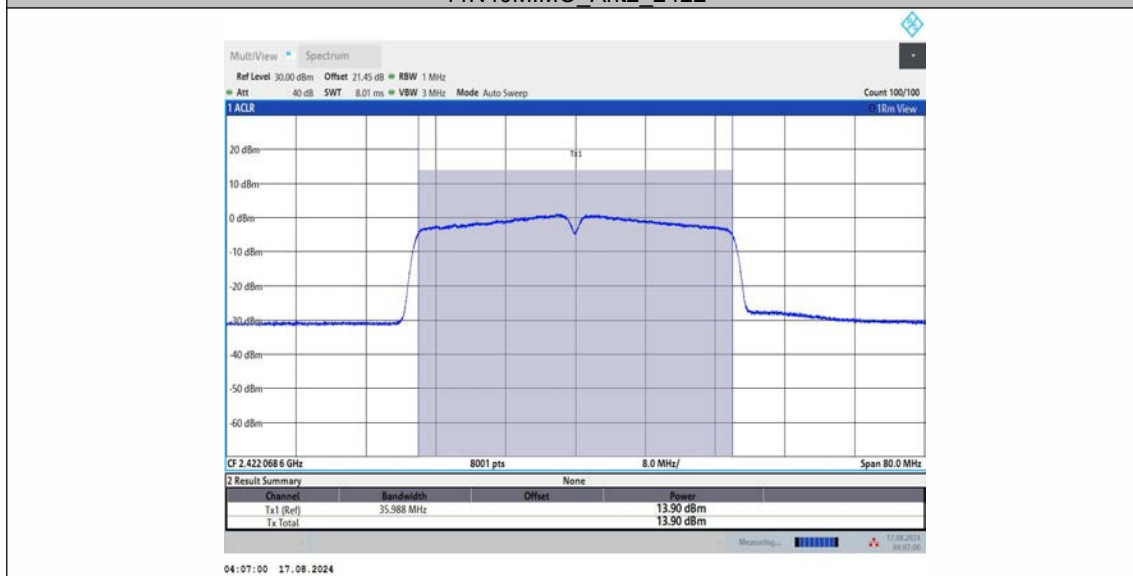


11N40MIMO_Ant1_2437

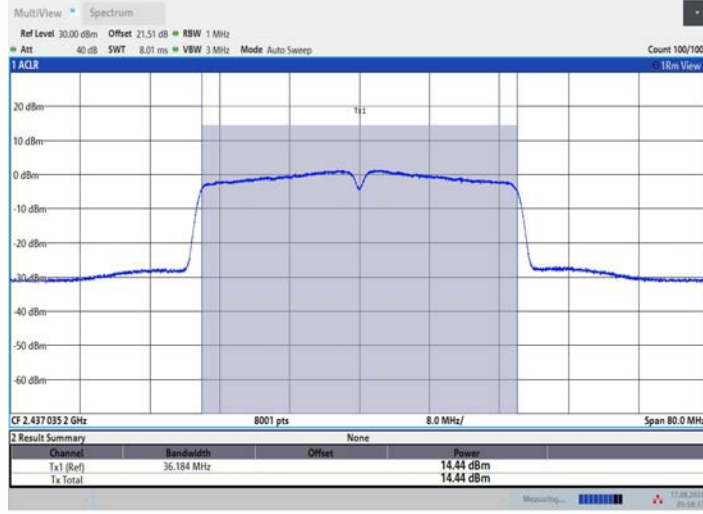


11N40MIMO_Ant2_2437

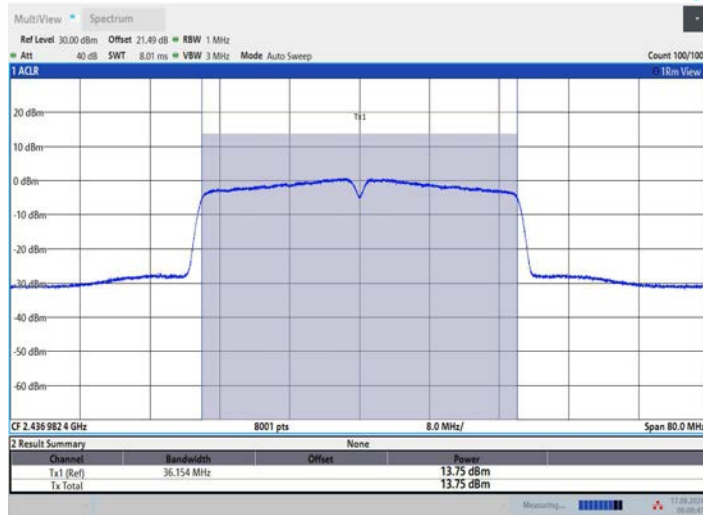


11N40MIMO_Ant1_2452

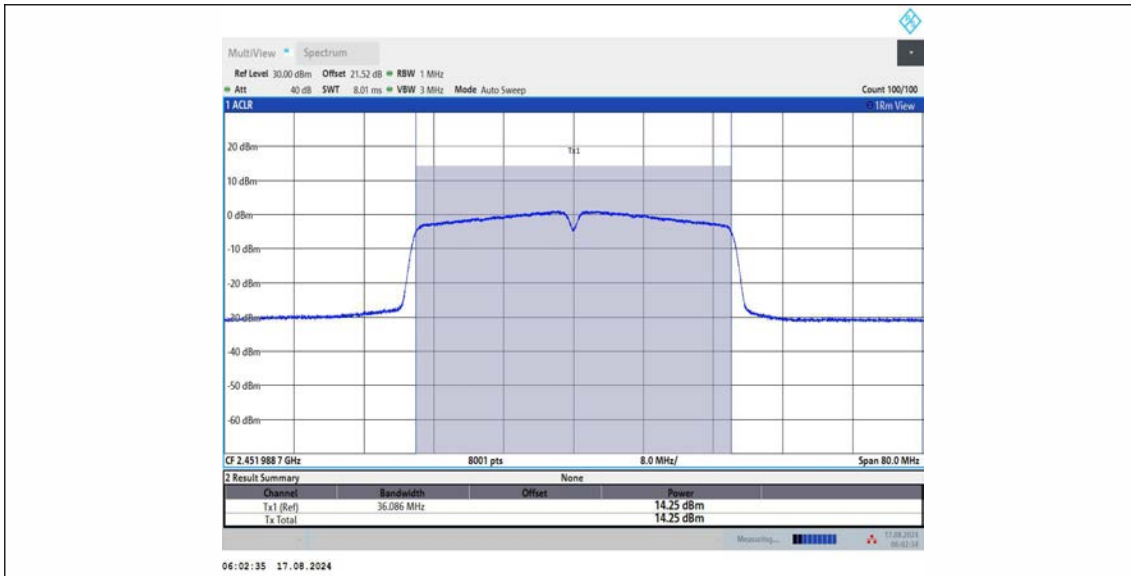


11N40MIMO Ant2_2452

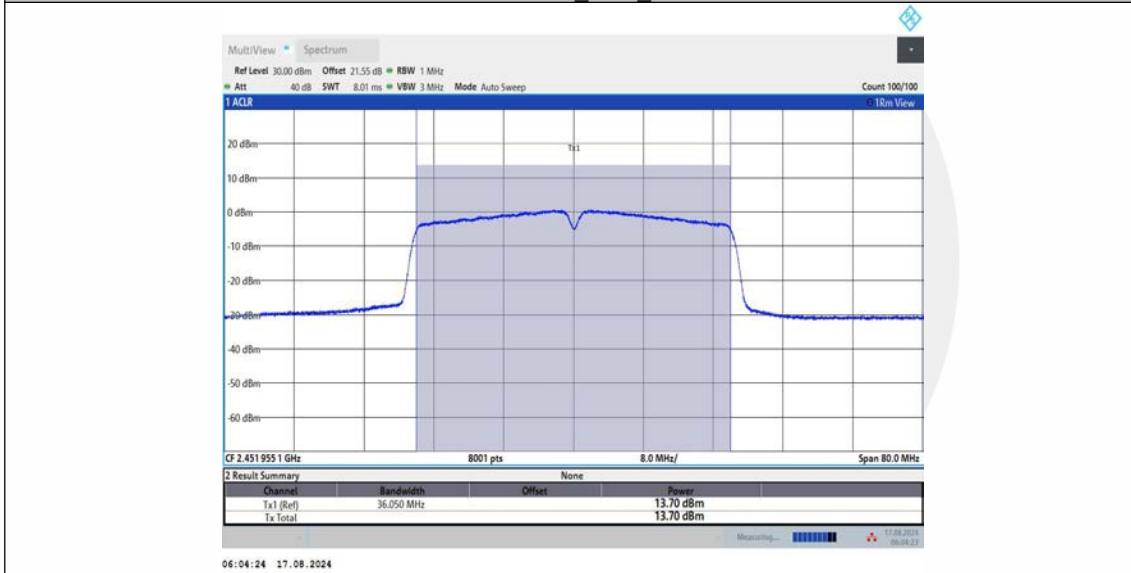

11AX20MIMO Ant1_2412

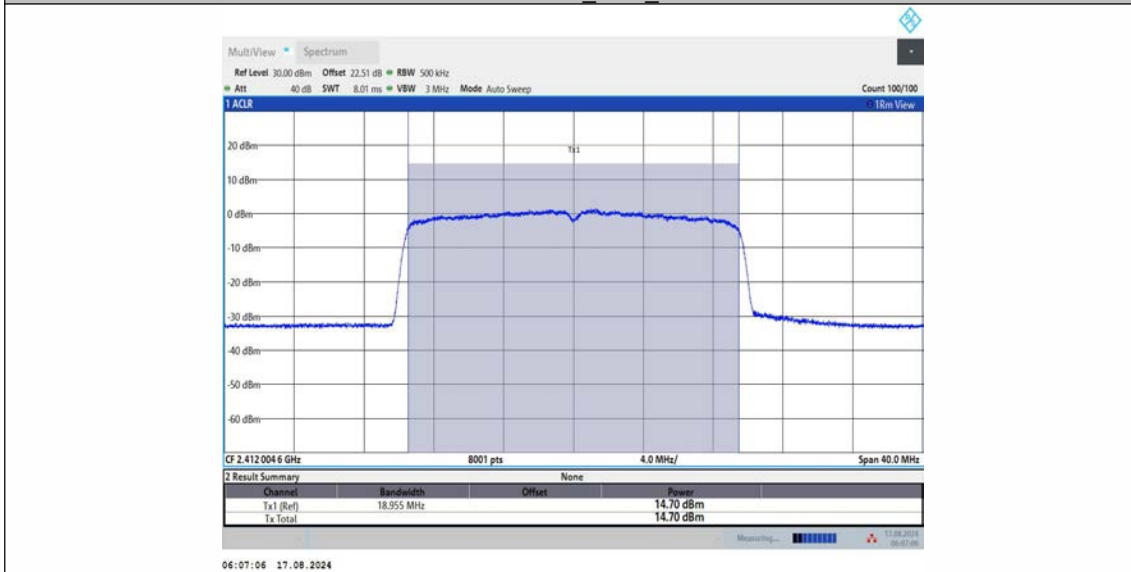


11AX20MIMO_Ant2_2412

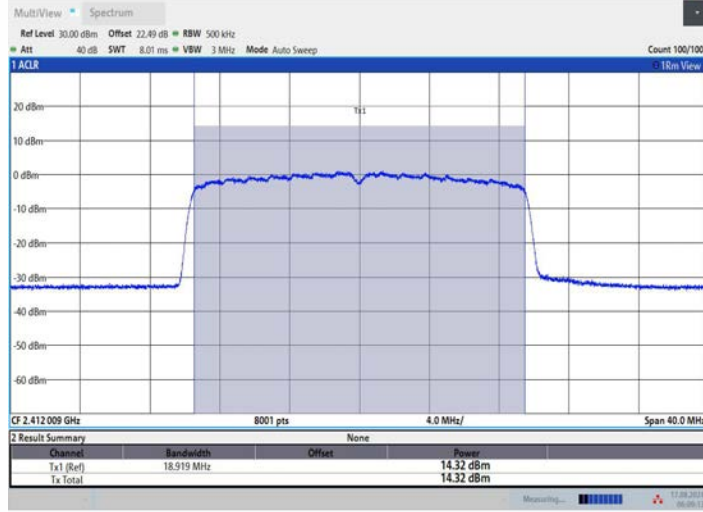


06:09:13 17.08.2024

11AX20MIMO_Ant1_2437

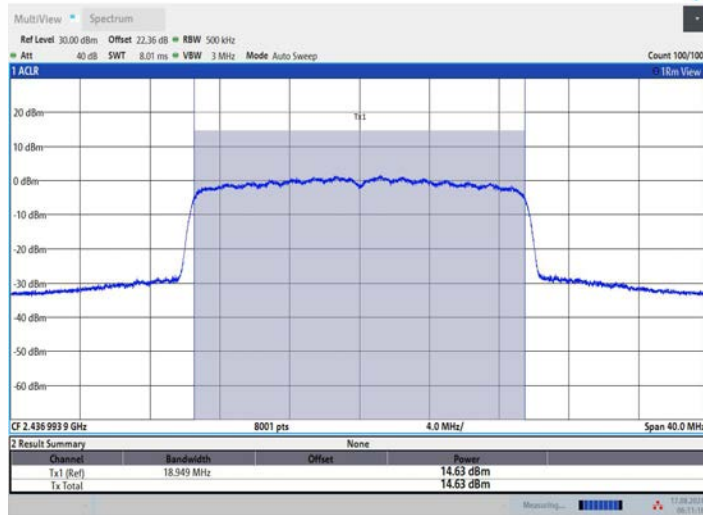


06:11:17 17.08.2024


11AX20MIMO_Ant2_2437

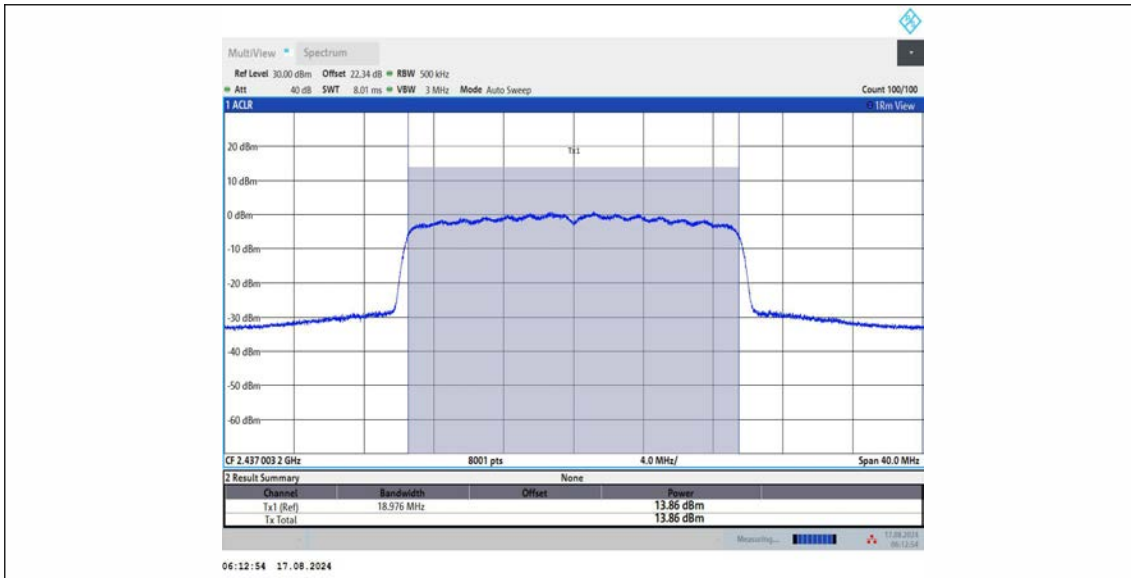


11AX20MIMO_Ant1_2462

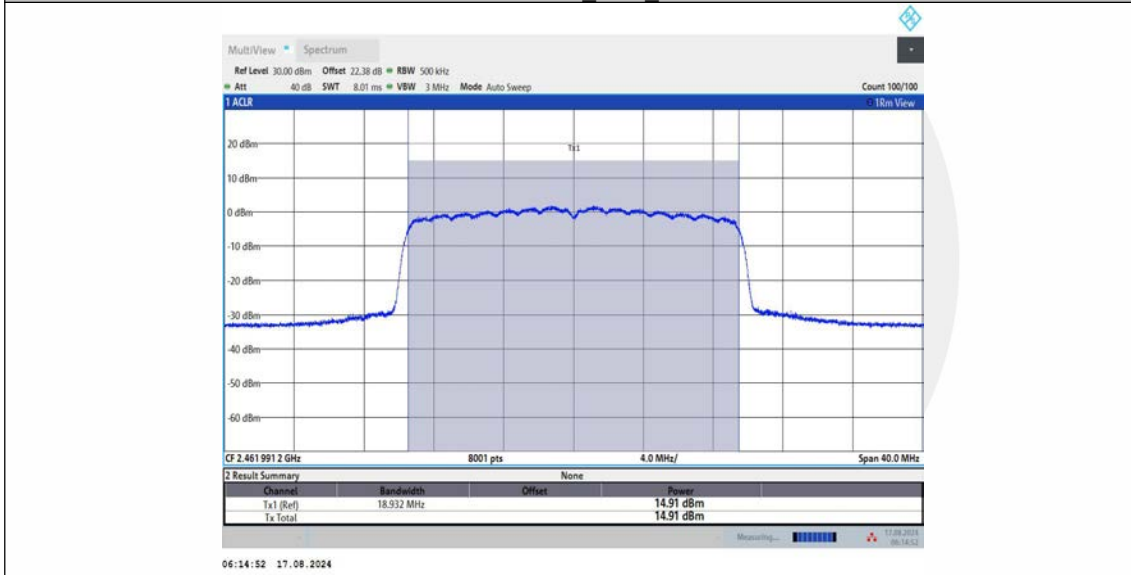


11AX20MIMO_Ant2_2462

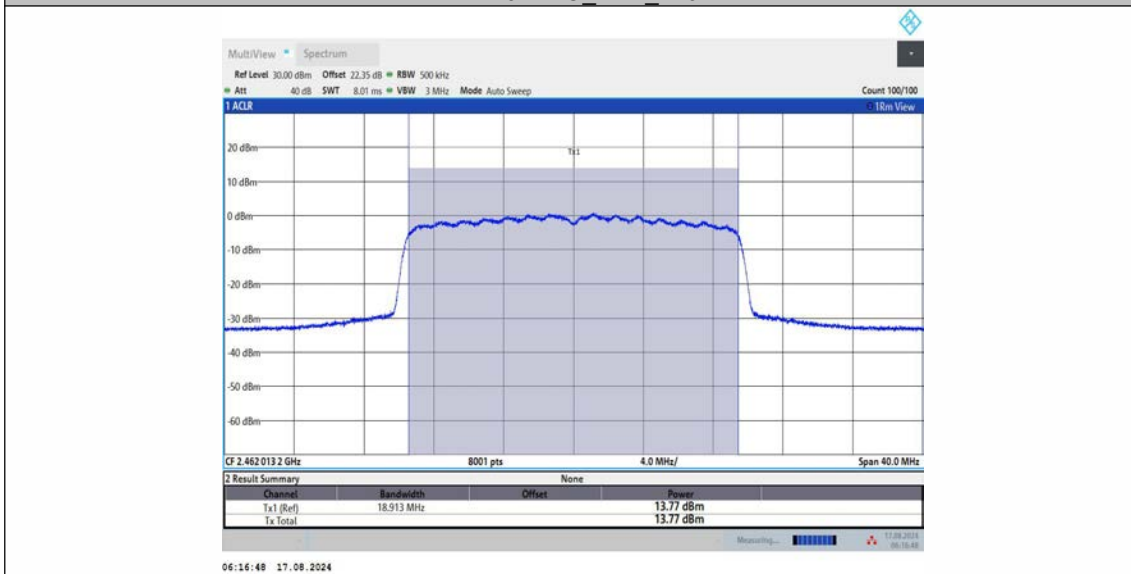


11AX40MIMO_Ant1_2422

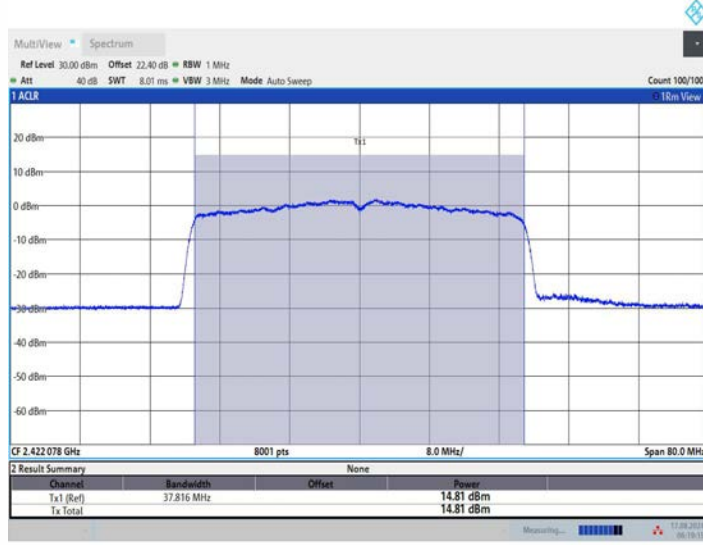


11AX40MIMO_Ant2_2422

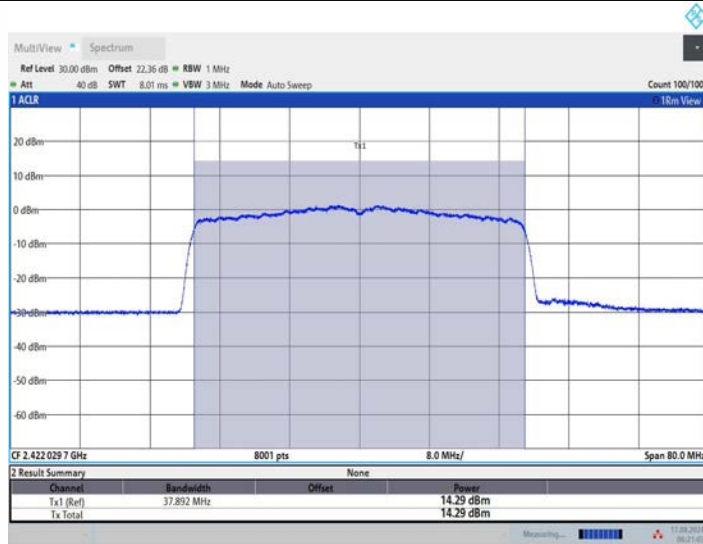


11AX40MIMO_Ant1_2437

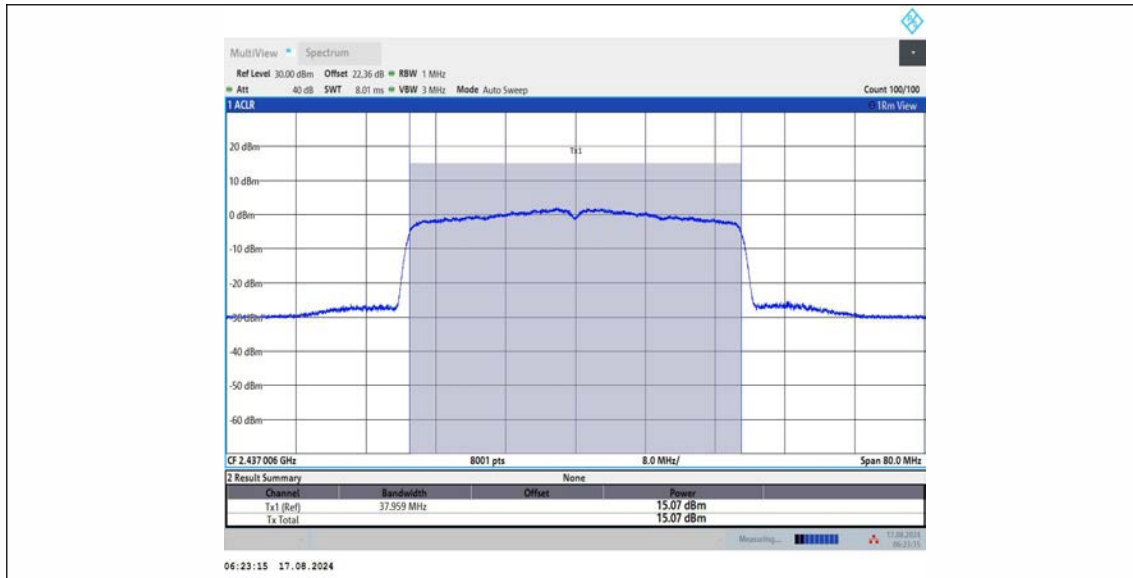


11AX40MIMO_Ant2_2437

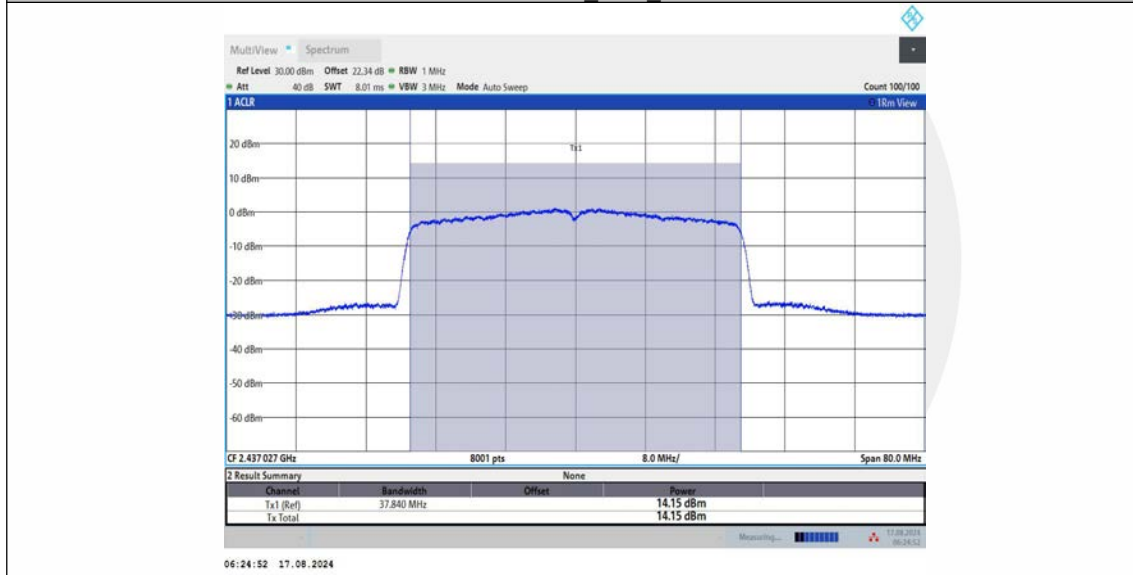

11AX40MIMO_Ant1_2452

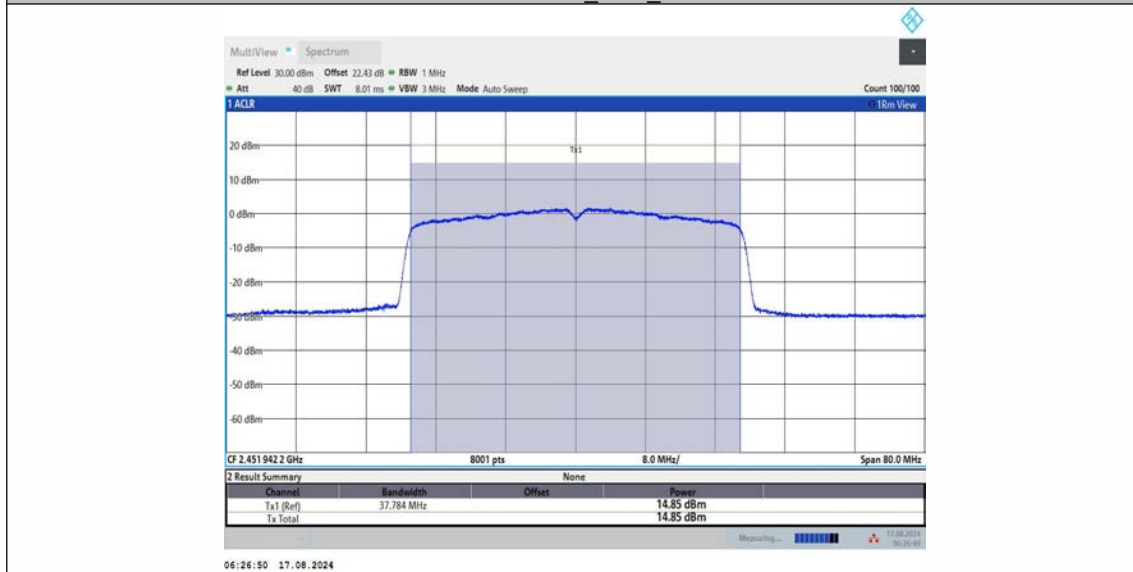


11AX40MIMO_Ant2_2452

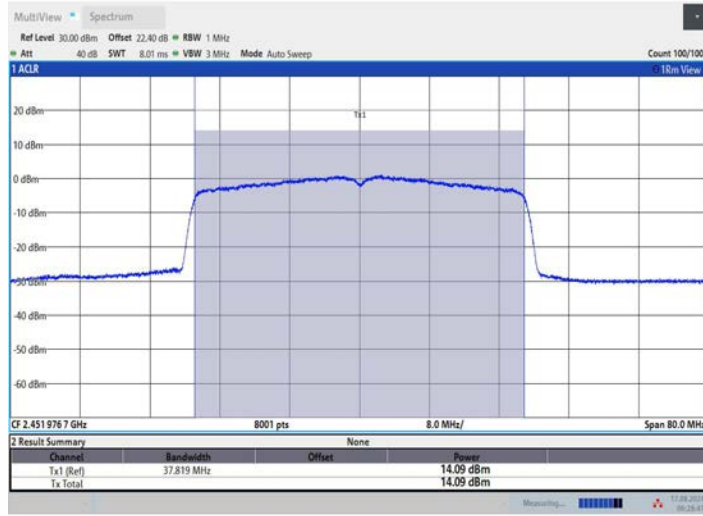


06:28:42 17.08.2024

11BE20MIMO_Ant1_2412

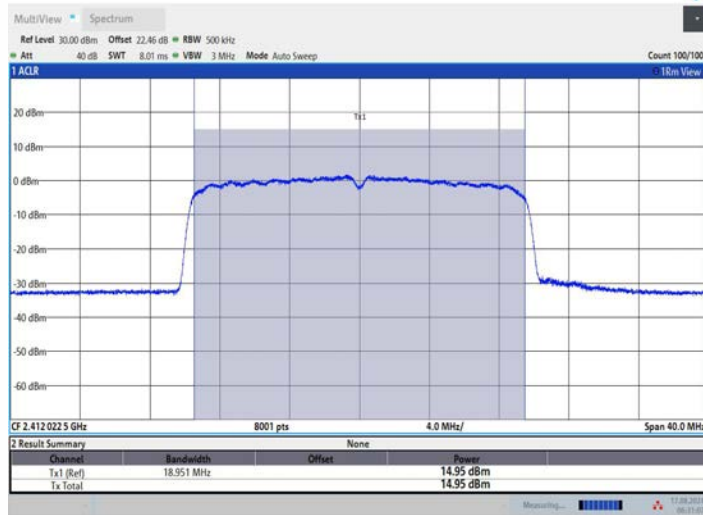


06:31:08 17.08.2024


11BE20MIMO_Ant2_2412

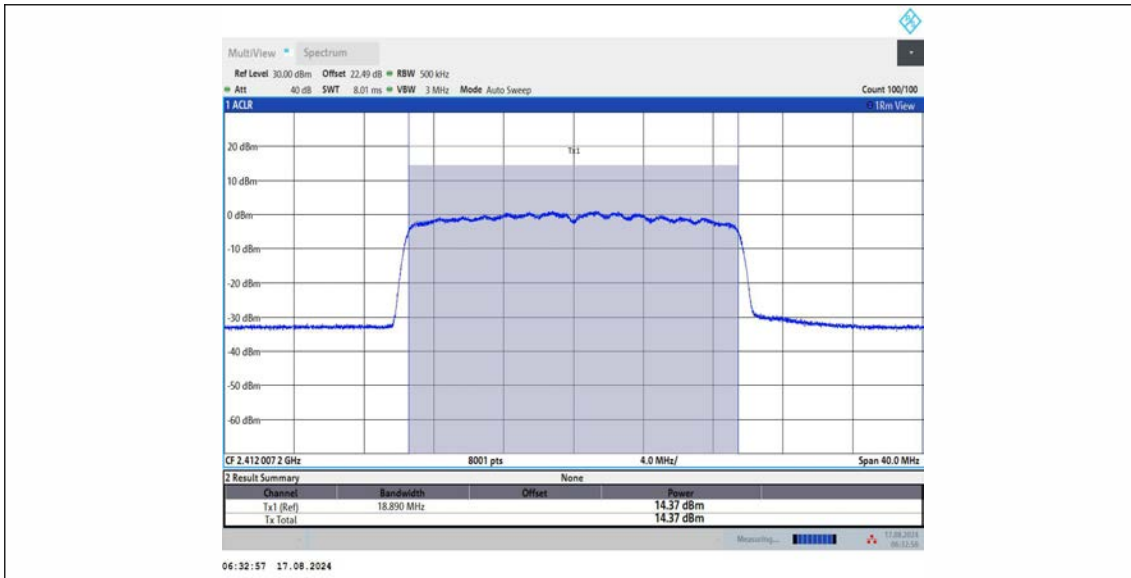


11BE20MIMO_Ant1_2437

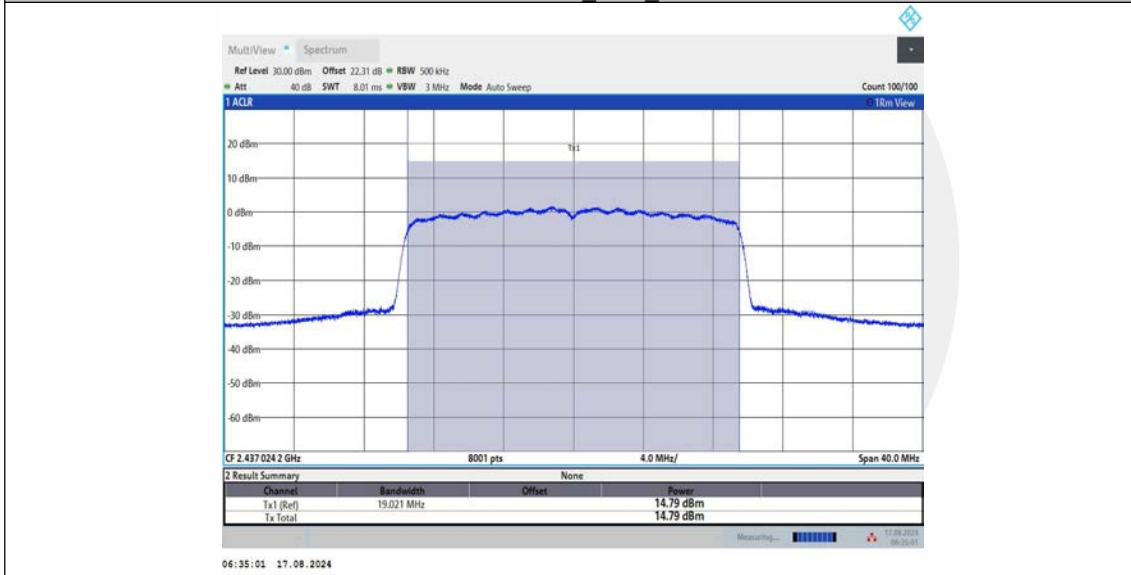


11BE20MIMO_Ant2_2437

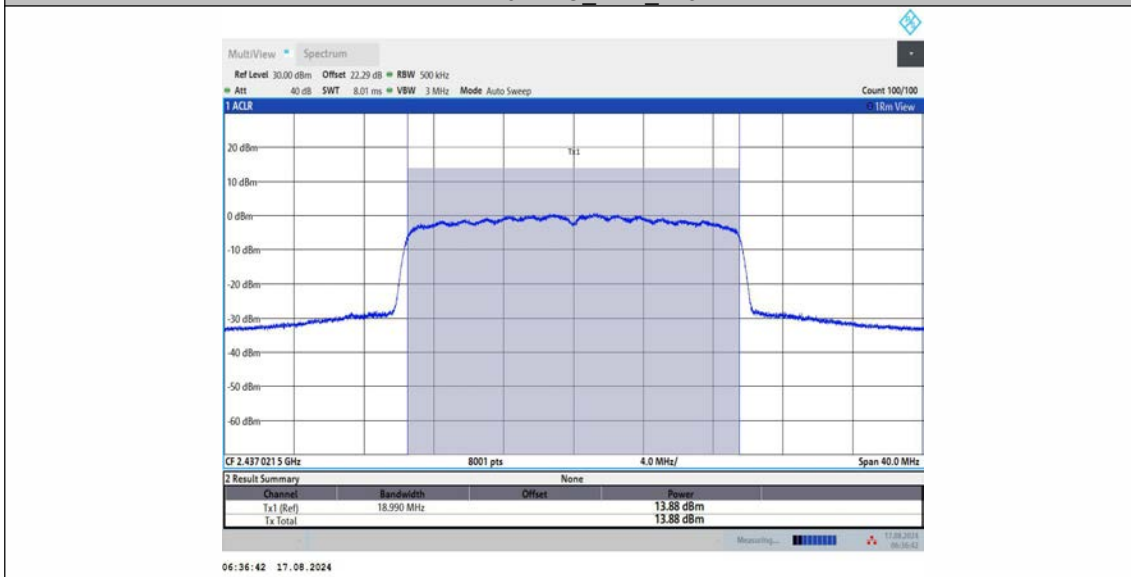


11BE20MIMO_Ant1_2462

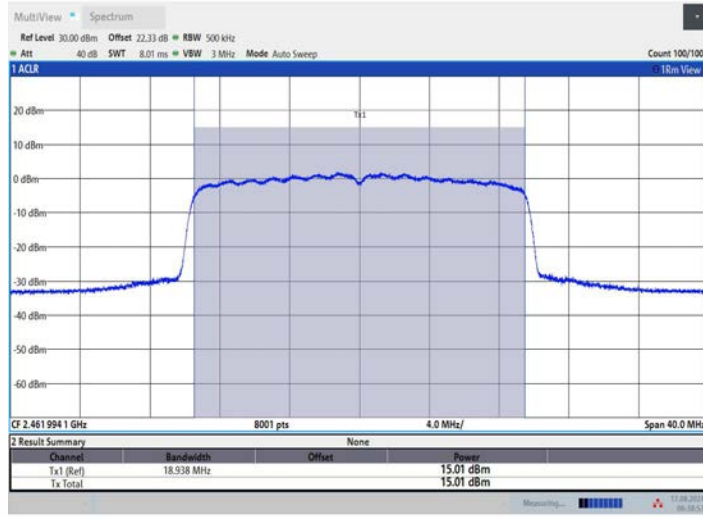


11BE20MIMO_Ant2_2462

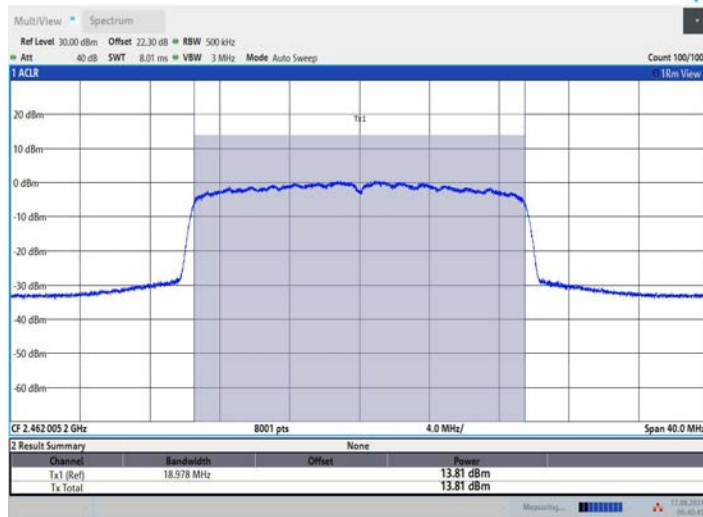


11BE40MIMO_Ant1_2422

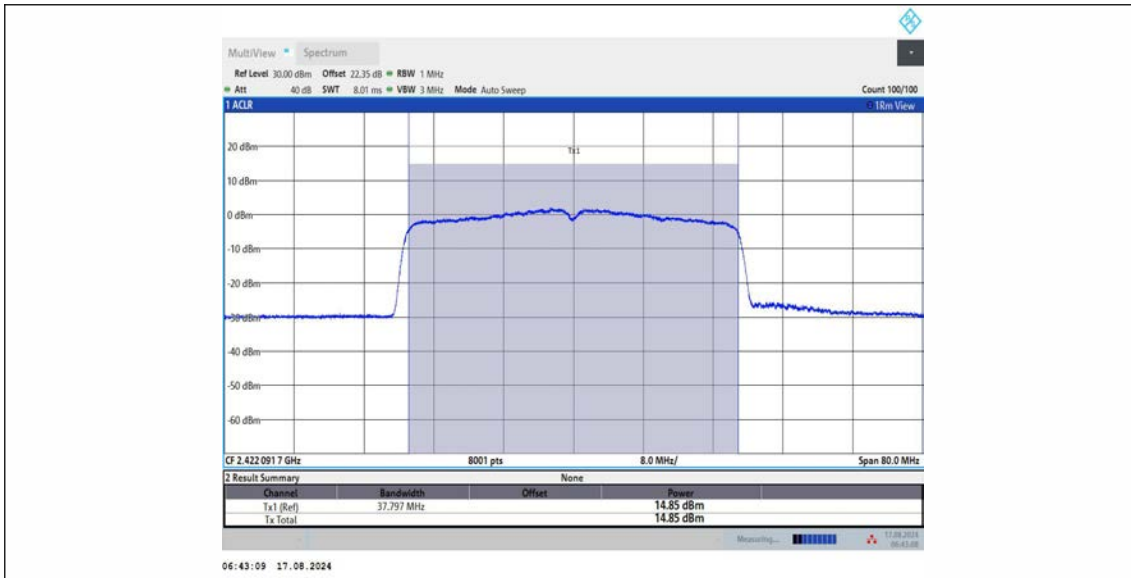


11BE40MIMO_Ant2_2422

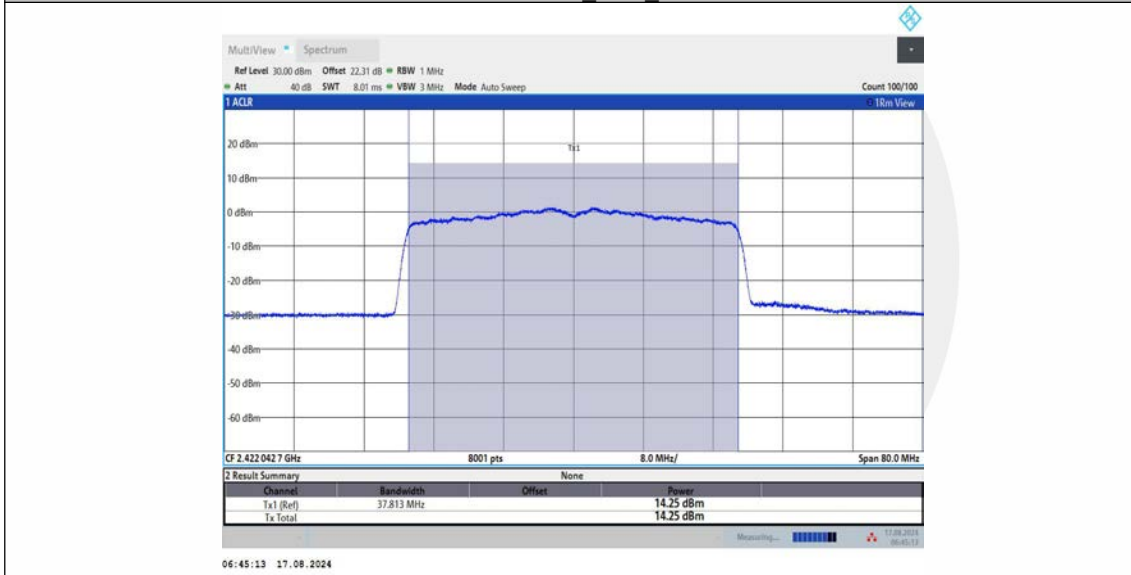


11BE40MIMO_Ant1_2437

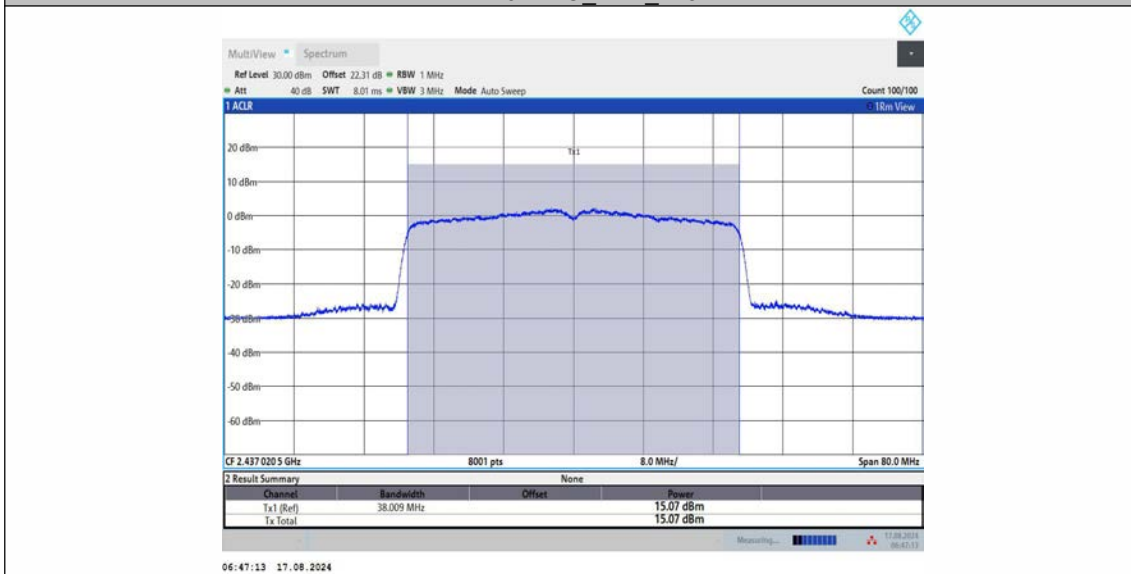


11BE40MIMO_Ant2_2437

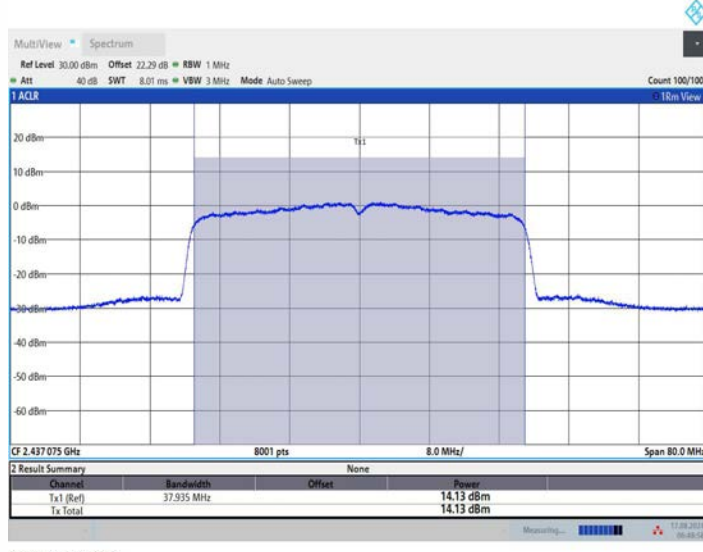

11BE40MIMO_Ant1_2452

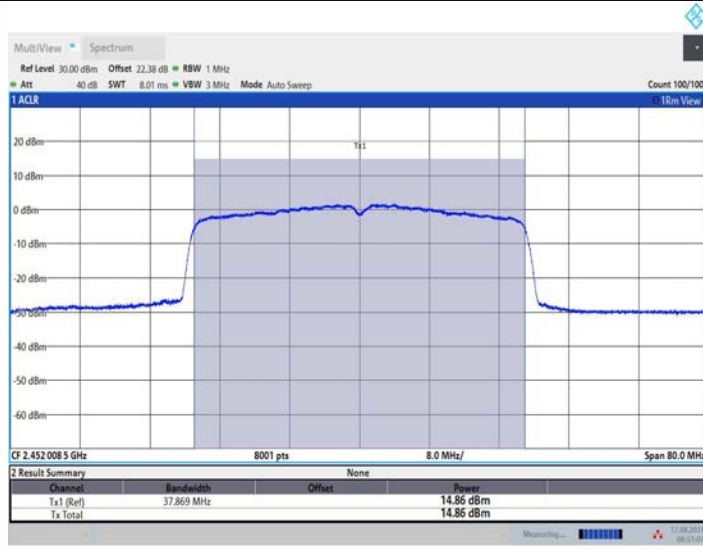

11BE40MIMO_Ant2_2452

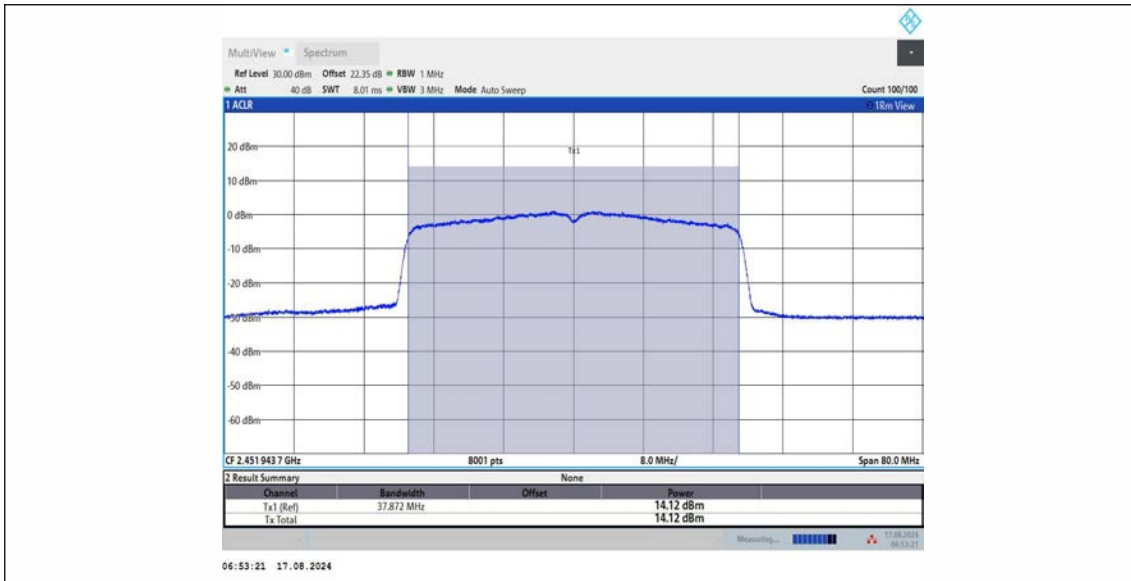

7.3 MAXIMUM POWER SPECTRAL DENSITY

7.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

7.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1.

7.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer.

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz.

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

7.3.5 Test Results


Temperature :	25°C	ATM Pressure::	1011 mbar
Humidity :	45 %	Test Engineer:	GJ

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.88	≤8.00	PASS
	Ant2	2412	-15.86	≤8.00	PASS
	Ant1	2437	-15.83	≤8.00	PASS
	Ant2	2437	-16.49	≤8.00	PASS
	Ant1	2462	-15.20	≤8.00	PASS
	Ant2	2462	-16.66	≤8.00	PASS
11G	Ant1	2412	-18.47	≤8.00	PASS
	Ant2	2412	-18.98	≤8.00	PASS
	Ant1	2437	-18.67	≤8.00	PASS
	Ant2	2437	-19.21	≤8.00	PASS
	Ant1	2462	-18.62	≤8.00	PASS
	Ant2	2462	-19.61	≤8.00	PASS
11N20MIMO	Ant1	2412	-18.46	≤8.00	PASS
	Ant2	2412	-18.54	≤8.00	PASS
	total	2412	-15.49	≤8.00	PASS
	Ant1	2437	-18.69	≤8.00	PASS
	Ant2	2437	-19.69	≤8.00	PASS
	total	2437	-16.15	≤8.00	PASS
	Ant1	2462	-18.21	≤8.00	PASS
	Ant2	2462	-19.75	≤8.00	PASS
	total	2462	-15.90	≤8.00	PASS
11N40MIMO	Ant1	2422	-19.49	≤8.00	PASS
	Ant2	2422	-19.90	≤8.00	PASS
	total	2422	-16.68	≤8.00	PASS
	Ant1	2437	-19.89	≤8.00	PASS
	Ant2	2437	-19.38	≤8.00	PASS
	total	2437	-16.62	≤8.00	PASS
	Ant1	2452	-19.92	≤8.00	PASS
	Ant2	2452	-20.28	≤8.00	PASS
	total	2452	-17.09	≤8.00	PASS
11AX20MIMO	Ant1	2412	-15.82	≤8.00	PASS
	Ant2	2412	-15.96	≤8.00	PASS
	total	2412	-12.88	≤8.00	PASS
	Ant1	2437	-15.92	≤8.00	PASS
	Ant2	2437	-16.42	≤8.00	PASS
	total	2437	-13.15	≤8.00	PASS
	Ant1	2462	-15.44	≤8.00	PASS
	Ant2	2462	-16.77	≤8.00	PASS
total	2462	-13.04	≤8.00	PASS	
11AX40MIMO	Ant1	2422	-17.29	≤8.00	PASS
	Ant2	2422	-16.67	≤8.00	PASS
	total	2422	-13.96	≤8.00	PASS
	Ant1	2437	-17.77	≤8.00	PASS
	Ant2	2437	-17.02	≤8.00	PASS
	total	2437	-14.37	≤8.00	PASS
	Ant1	2452	-18.02	≤8.00	PASS
	Ant2	2452	-17.16	≤8.00	PASS
total	2452	-14.56	≤8.00	PASS	
11BE20MIMO	Ant1	2412	-13.31	≤8.00	PASS
	Ant2	2412	-13.62	≤8.00	PASS
	total	2412	-10.45	≤8.00	PASS
	Ant1	2437	-13.56	≤8.00	PASS
	Ant2	2437	-14.30	≤8.00	PASS
	total	2437	-10.90	≤8.00	PASS
	Ant1	2462	-14.00	≤8.00	PASS
	Ant2	2462	-14.37	≤8.00	PASS
	total	2462	-11.17	≤8.00	PASS
11BE40MIMO	Ant1	2422	-17.19	≤8.00	PASS
	Ant2	2422	-16.92	≤8.00	PASS


	total	2422	-14.04	≤8.00	PASS
	Ant1	2437	-17.57	≤8.00	PASS
	Ant2	2437	-18.04	≤8.00	PASS
	total	2437	-14.79	≤8.00	PASS
	Ant1	2452	-17.85	≤8.00	PASS
	Ant2	2452	-16.89	≤8.00	PASS
	total	2452	-14.33	≤8.00	PASS




11B_Ant1_2412

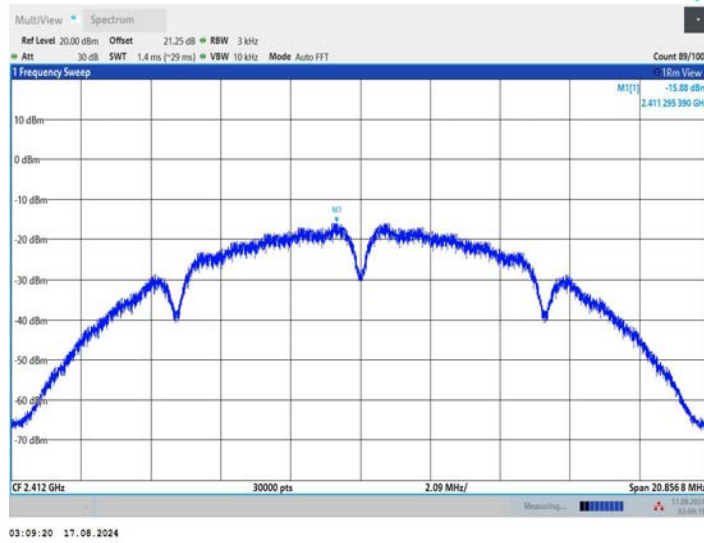


11B_Ant2_2412

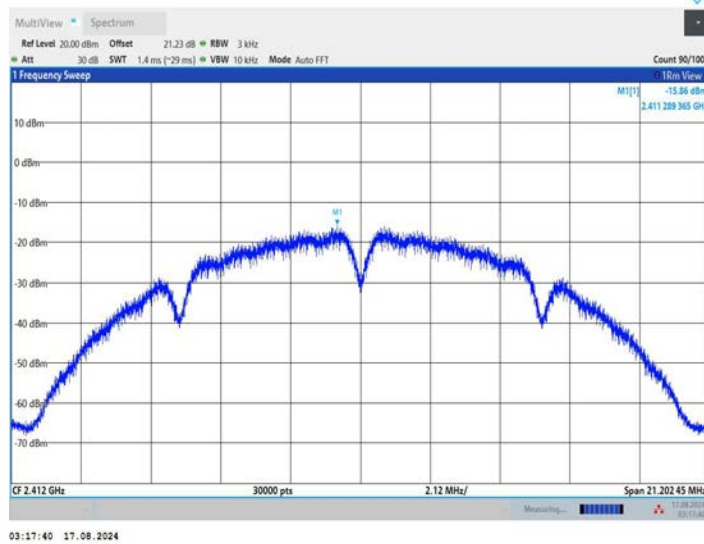


11B_Ant1_2437

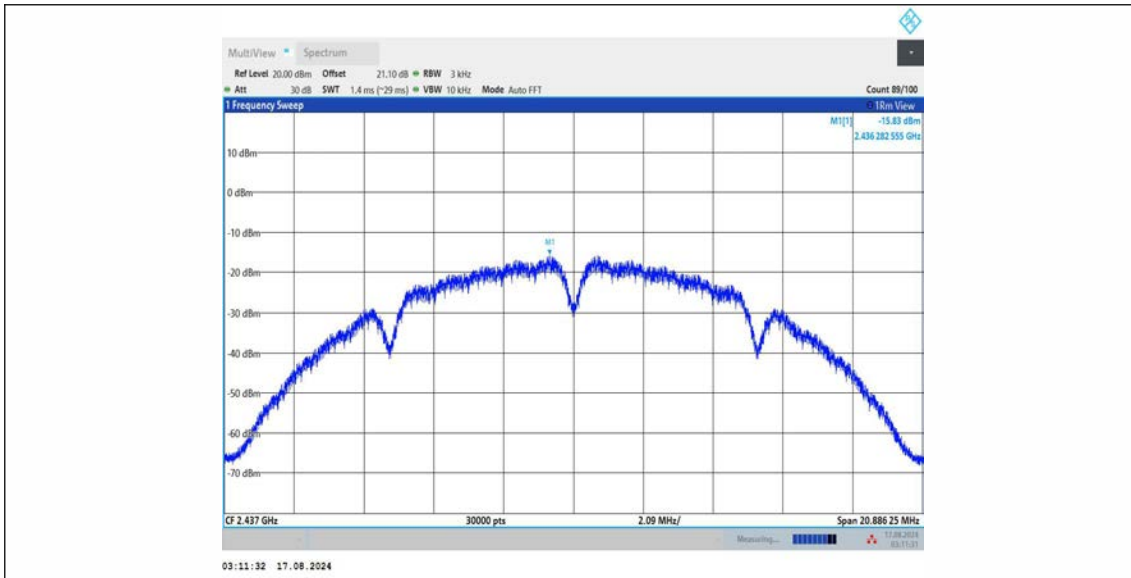


11B_Ant2_2437

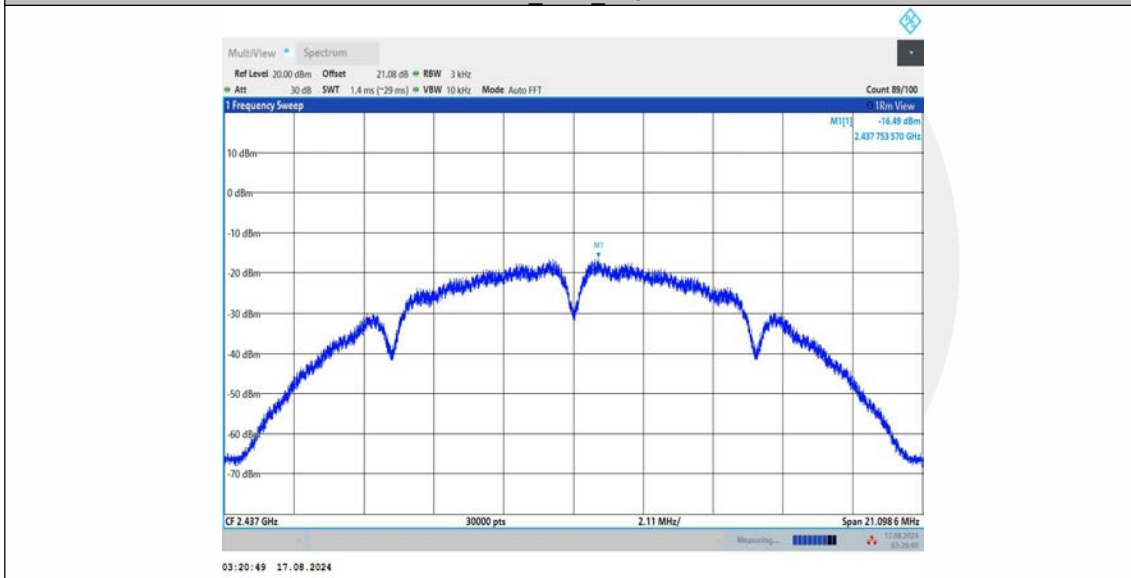


11B_Ant1_2462

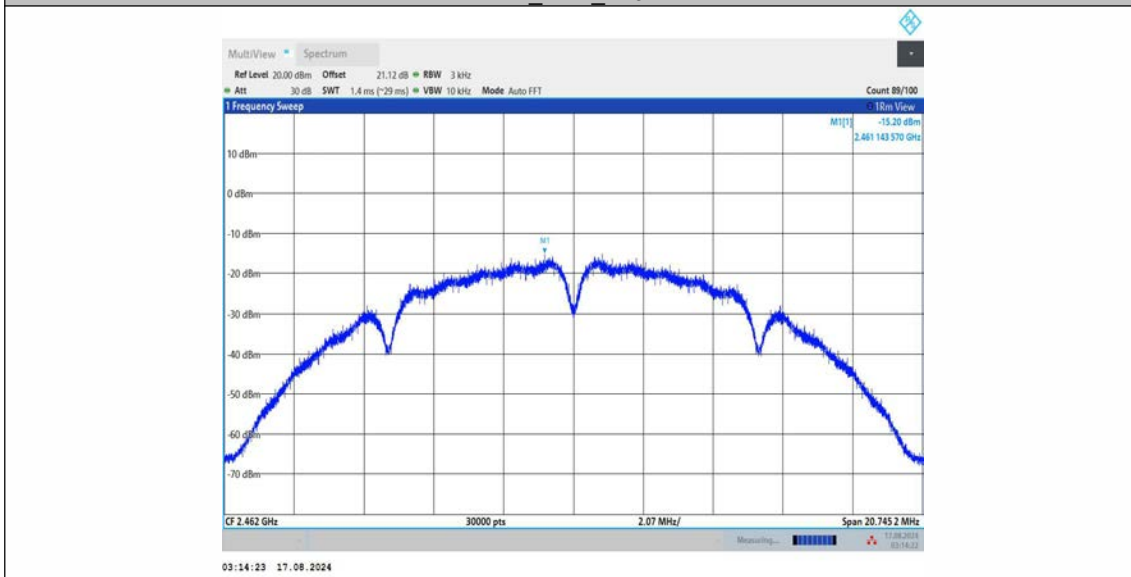


11B_Ant2_2462

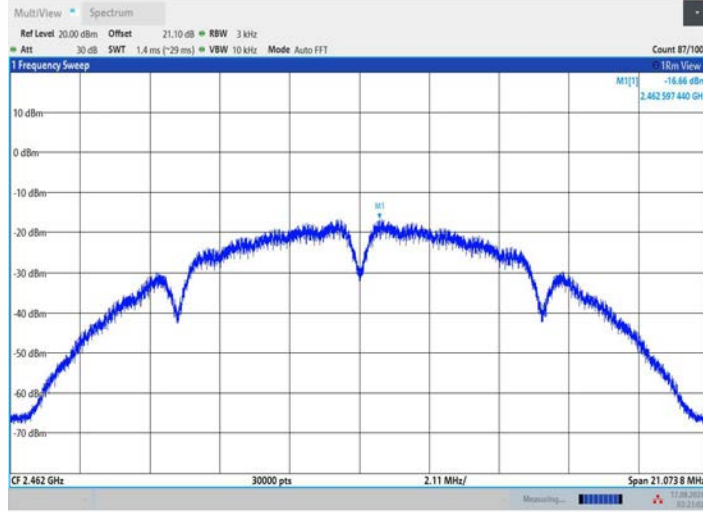


11G_Ant1_2412

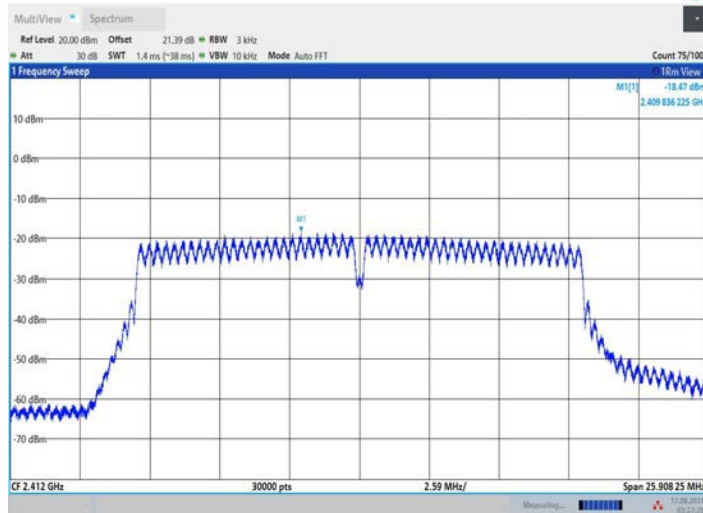


11G_Ant2_2412

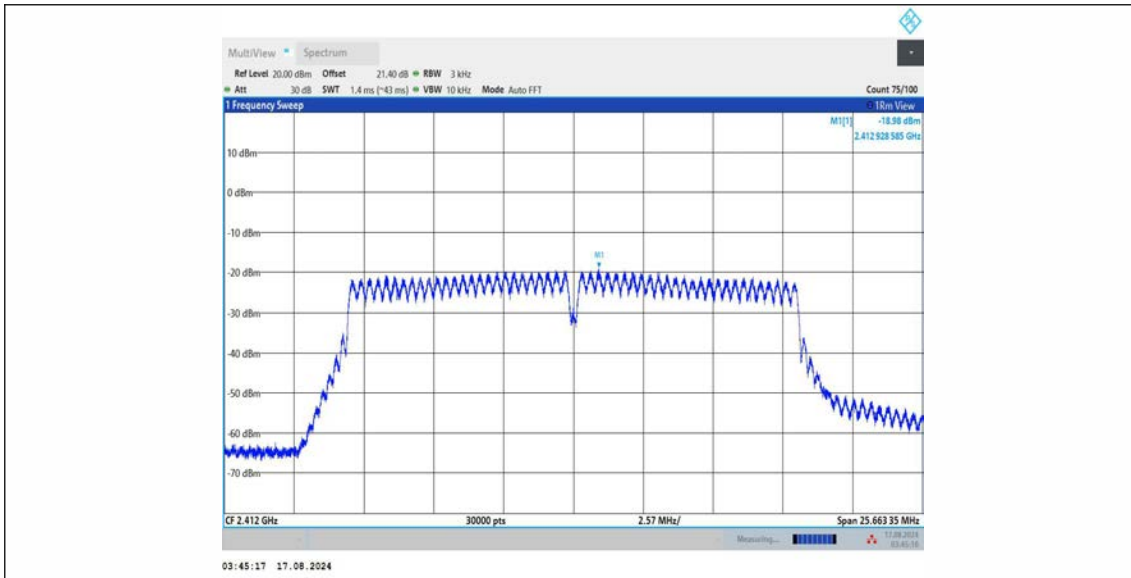


11G_Ant1_2437

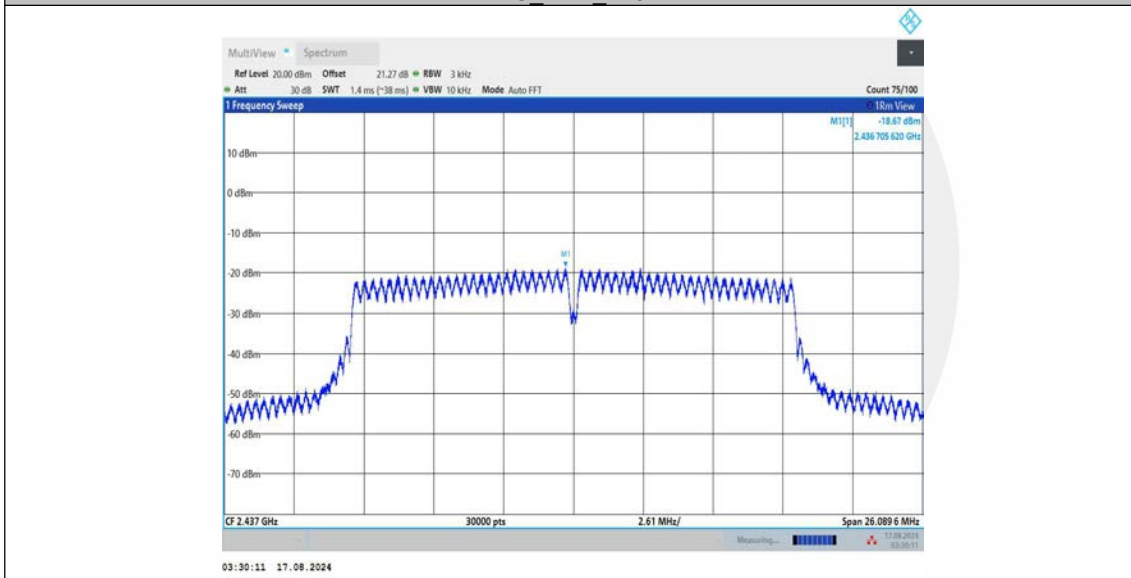


11G_Ant2_2437

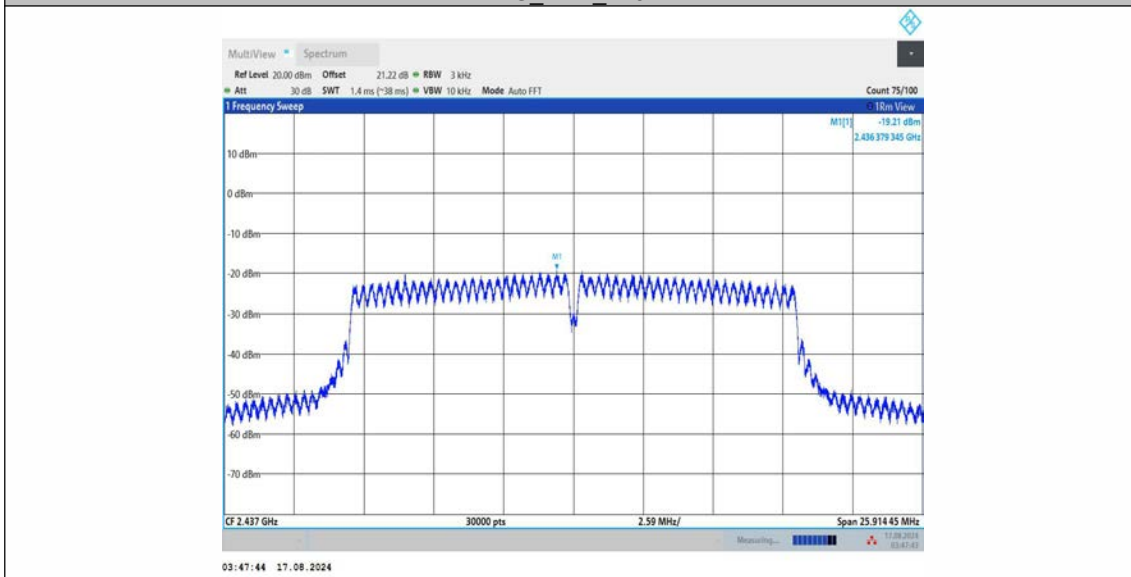


11G_Ant1_2462

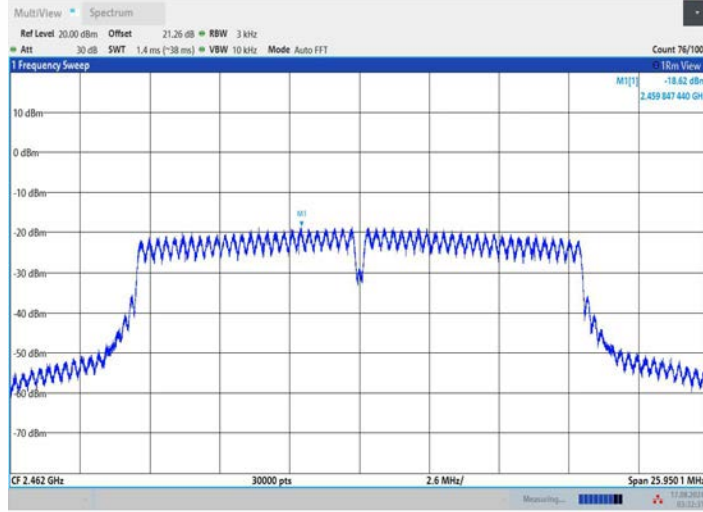


11G_Ant2_2462

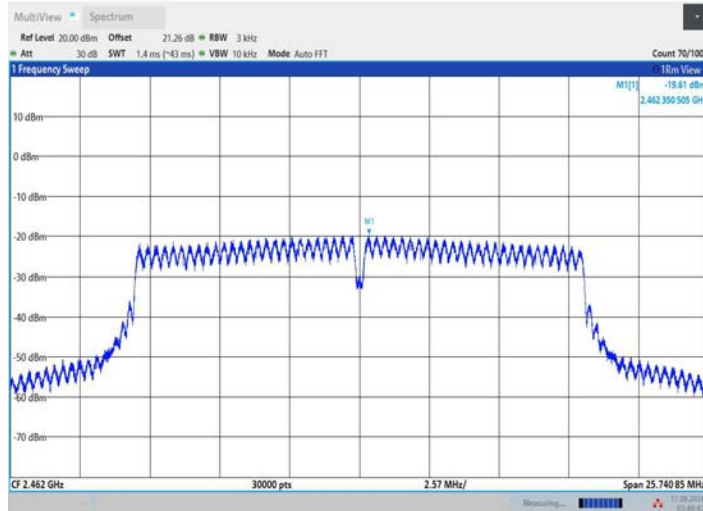


11N20MIMO_Ant1_2412

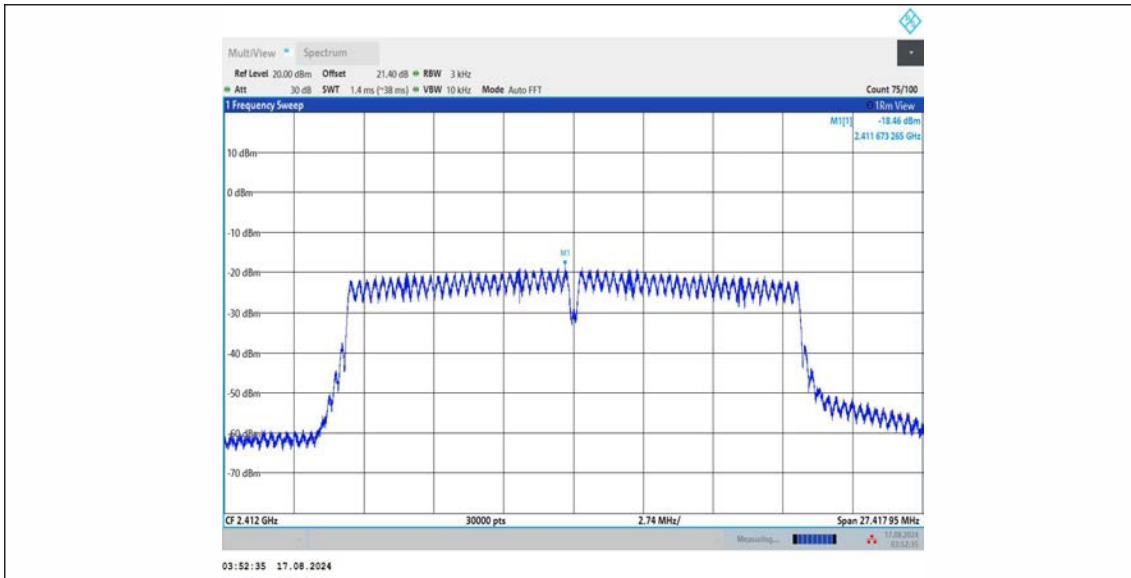


11N20MIMO_Ant2_2412

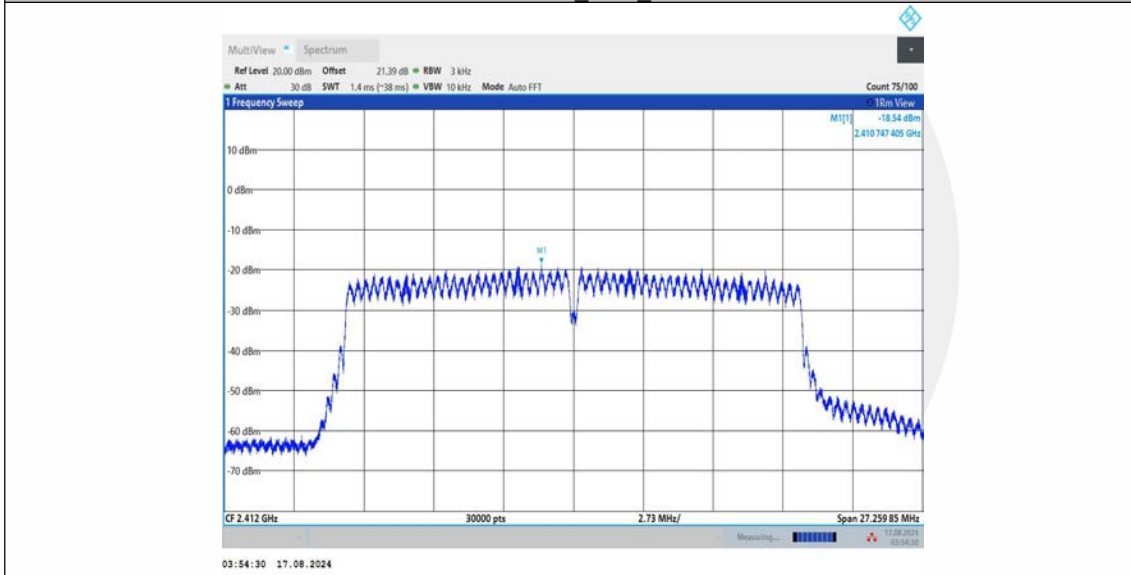


11N20MIMO_Ant1_2437

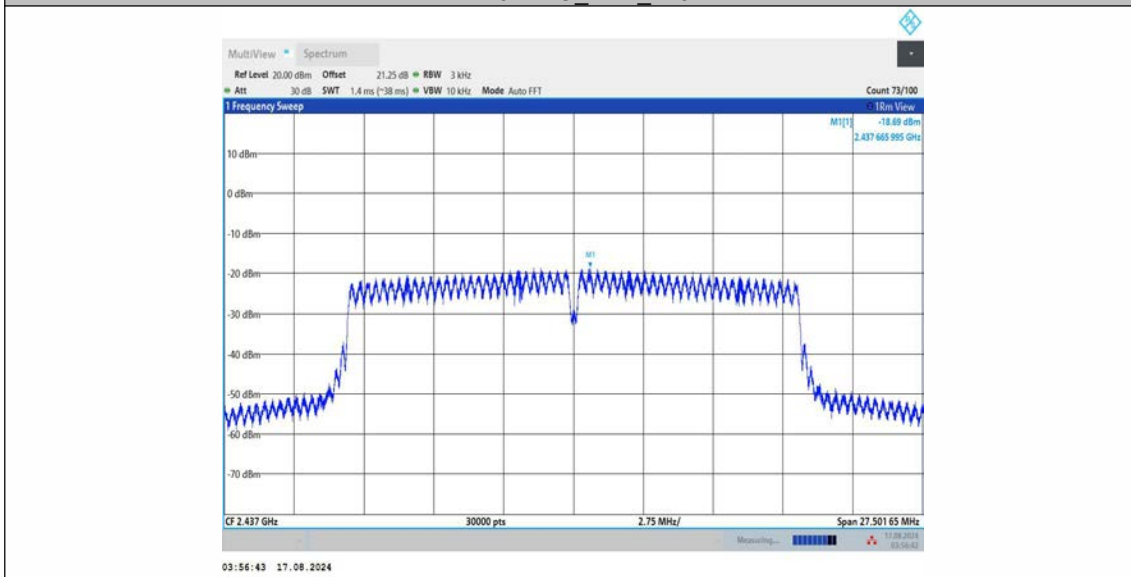


11N20MIMO_Ant2_2437

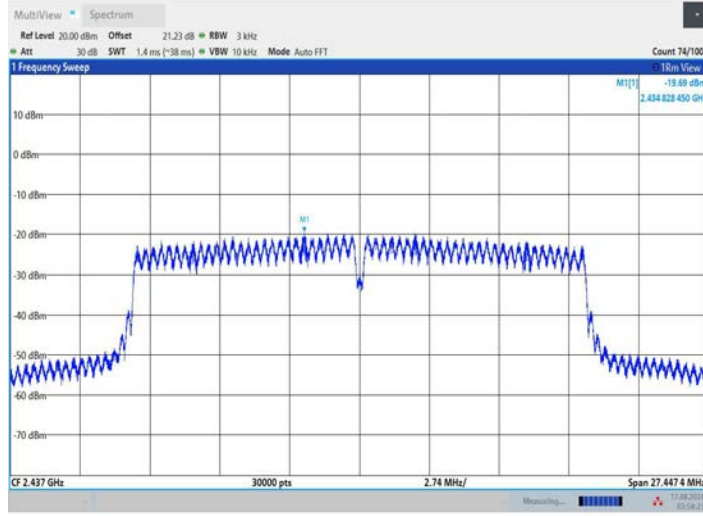


11N20MIMO_Ant1_2462

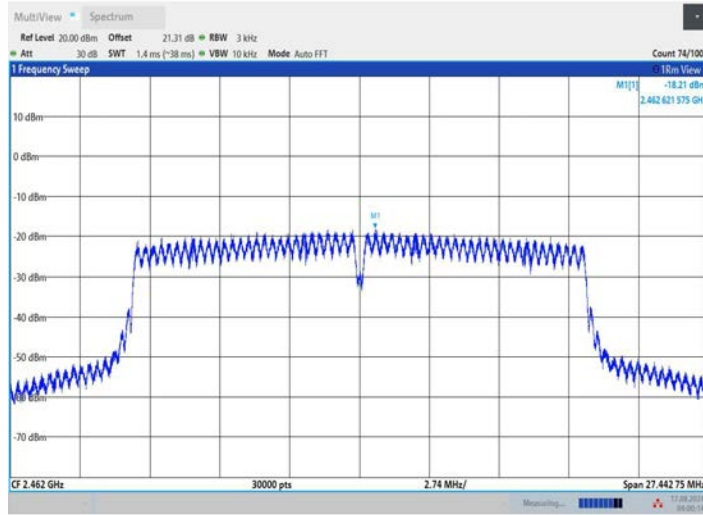


11N20MIMO_Ant2_2462

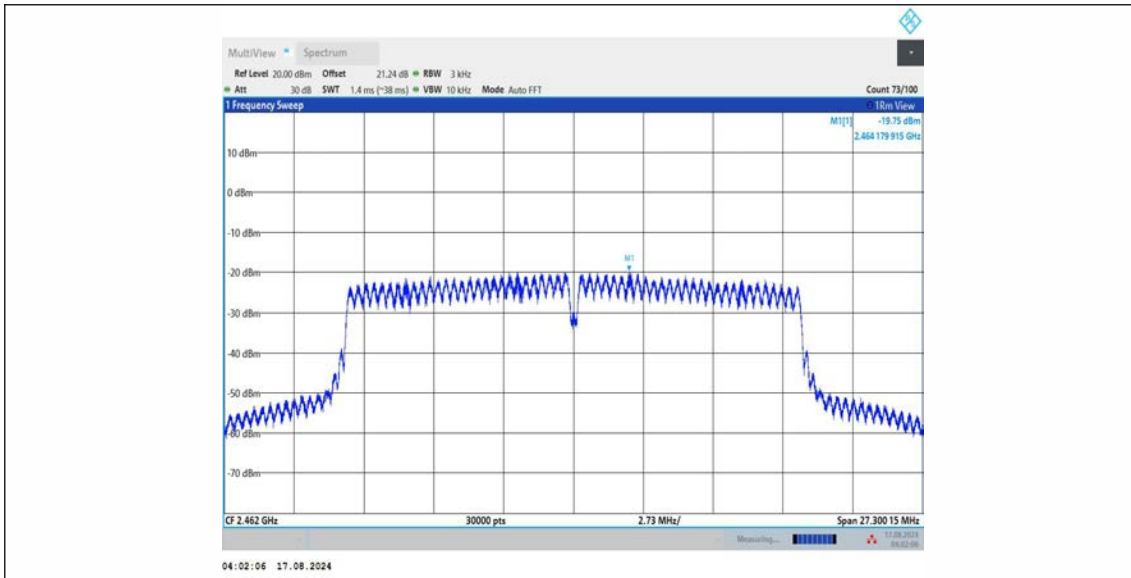


11N40MIMO_Ant1_2422

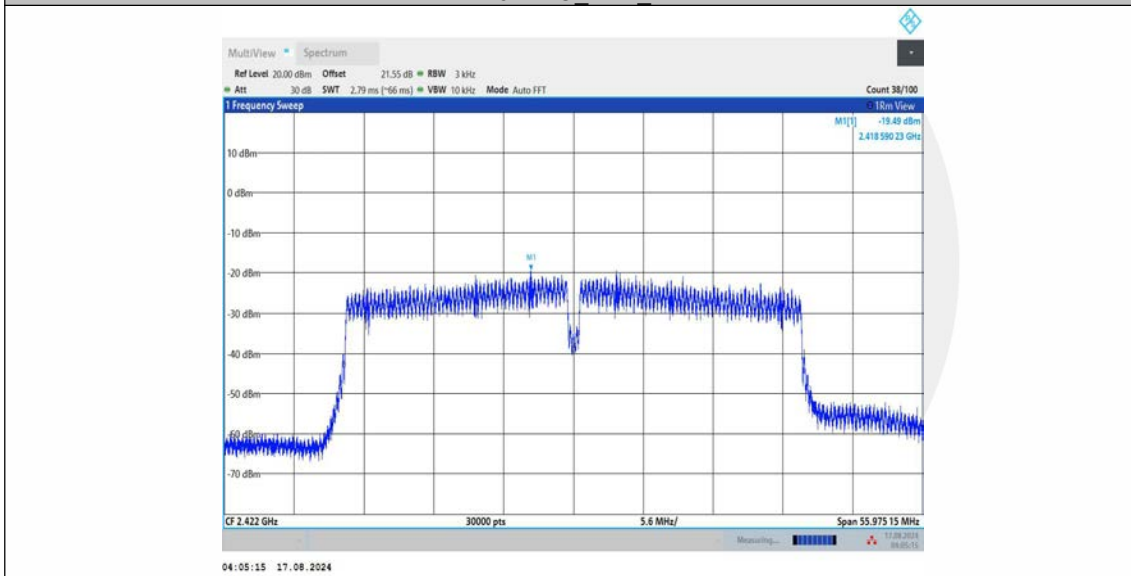


11N40MIMO_Ant2_2422

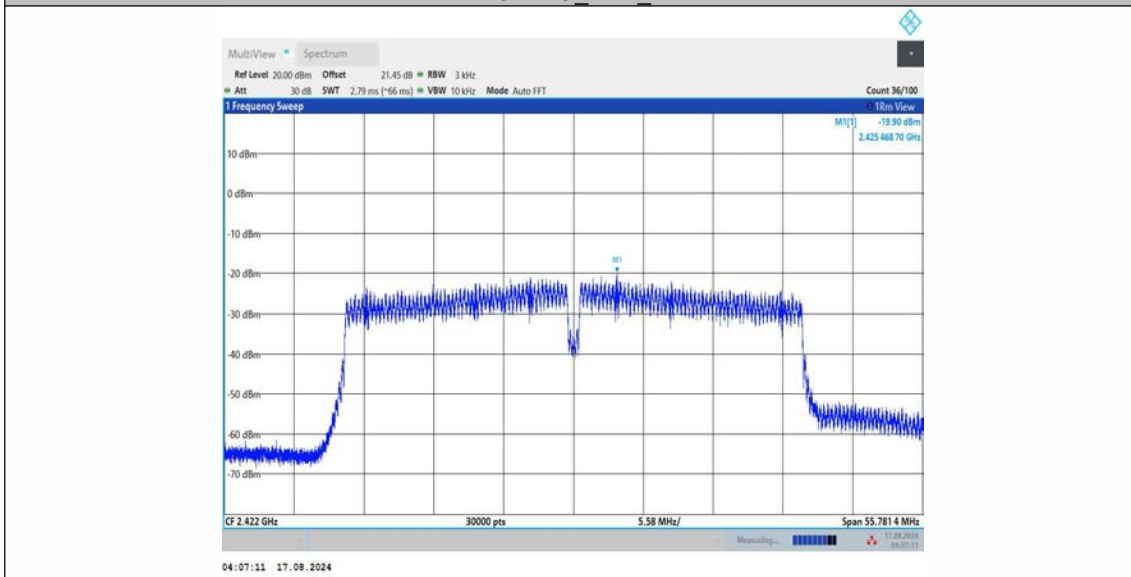


11N40MIMO_Ant1_2437

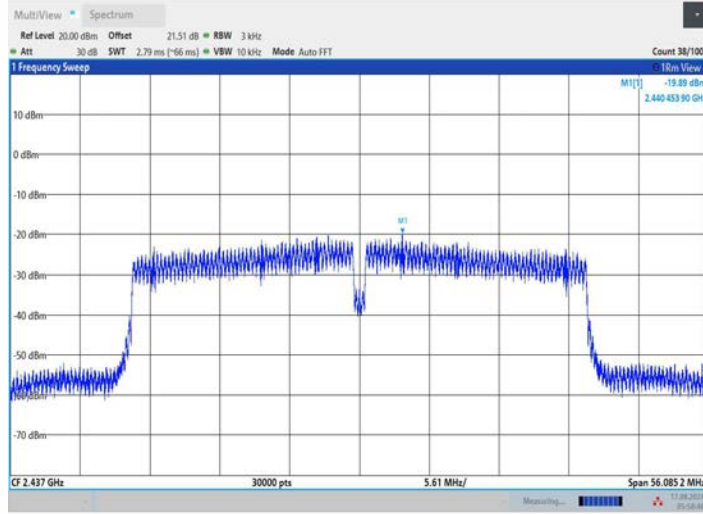


11N40MIMO_Ant2_2437

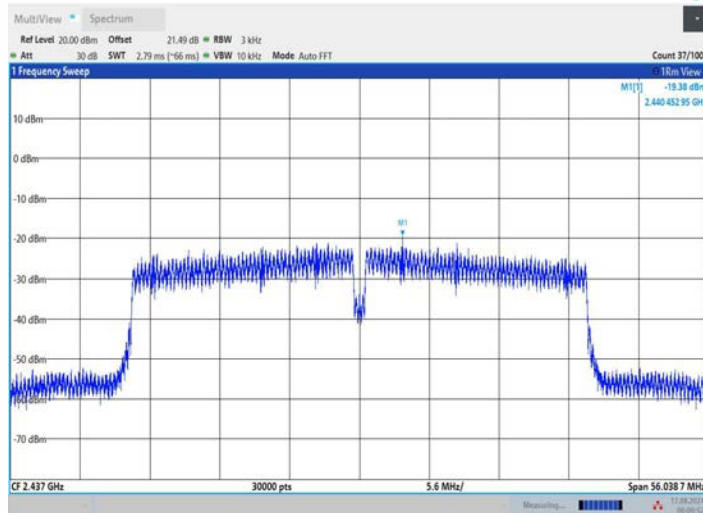


11N40MIMO_Ant1_2452

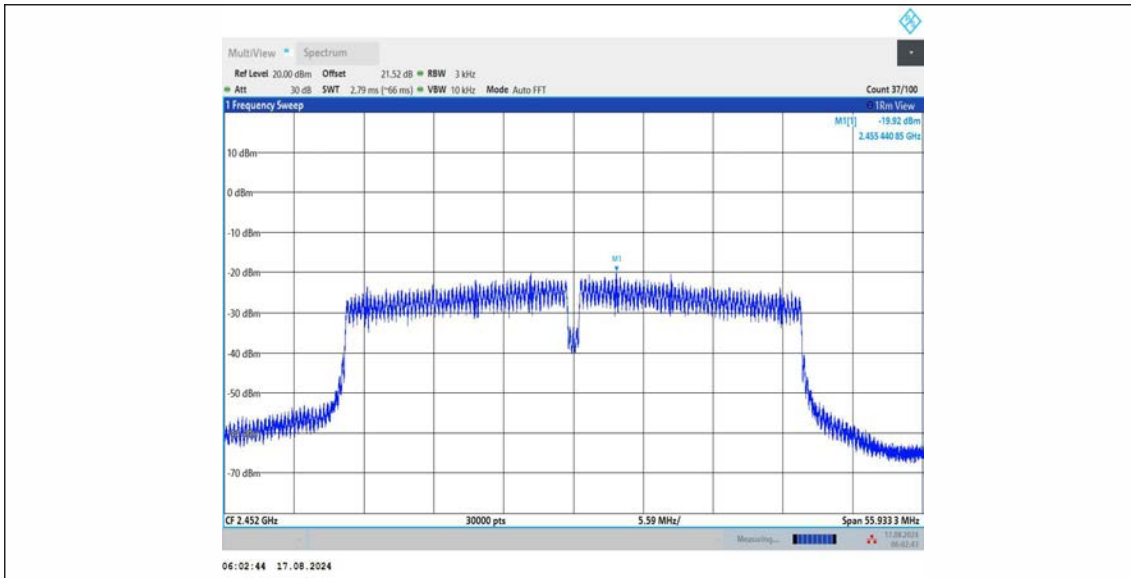


11N40MIMO_Ant2_2452

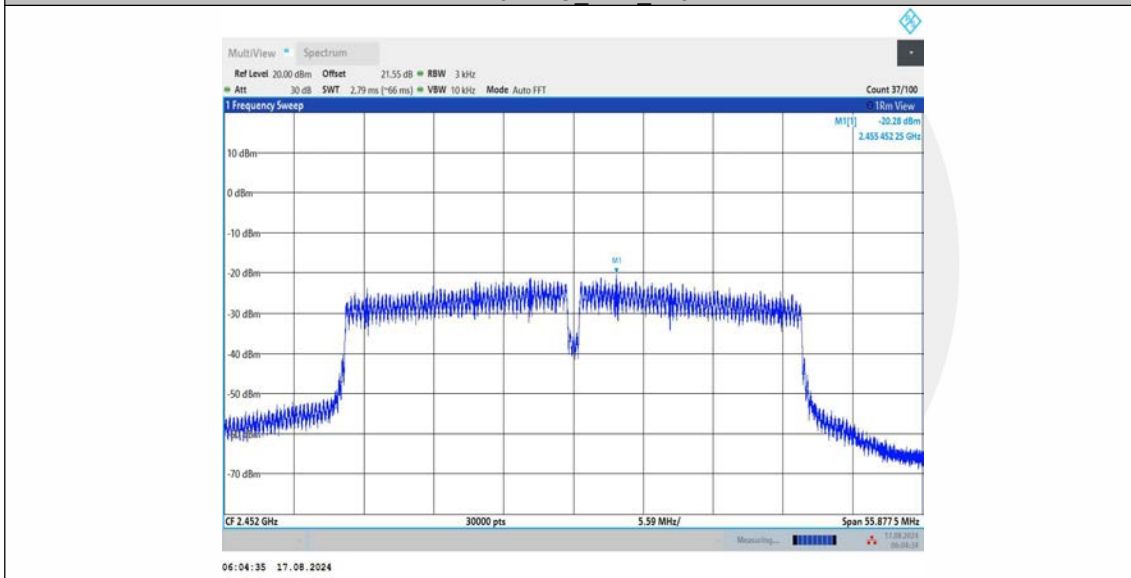


11AX20MIMO_Ant1_2412

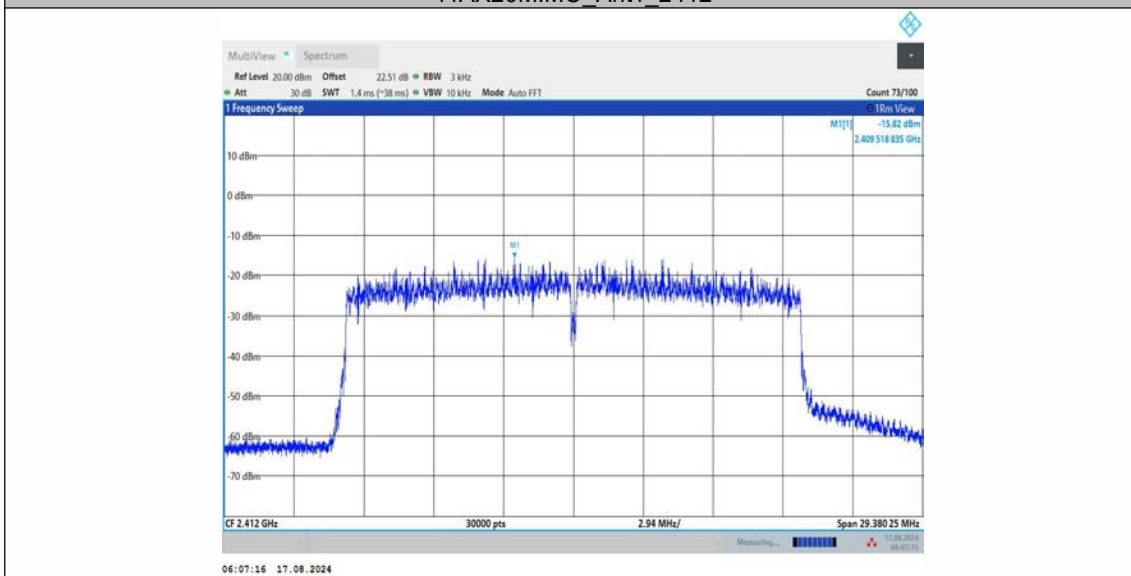


11AX20MIMO_Ant2_2412

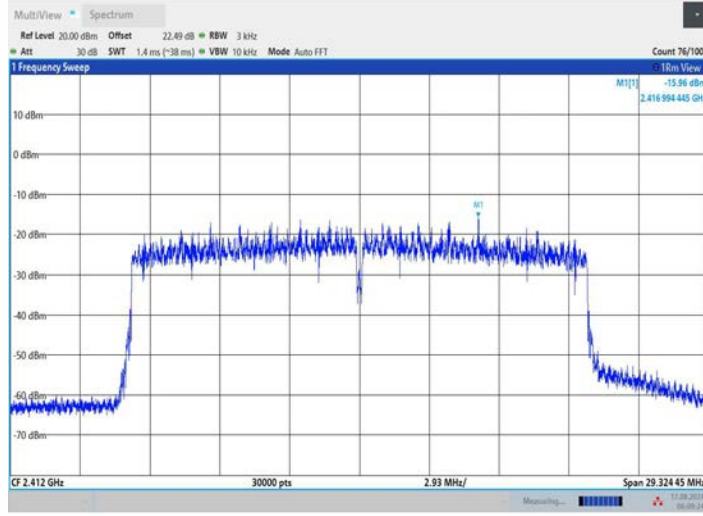


11AX20MIMO_Ant1_2437

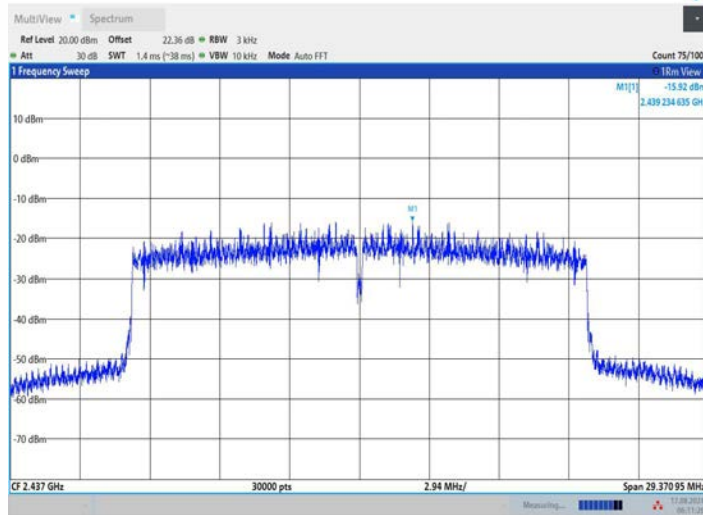


11AX20MIMO_Ant2_2437

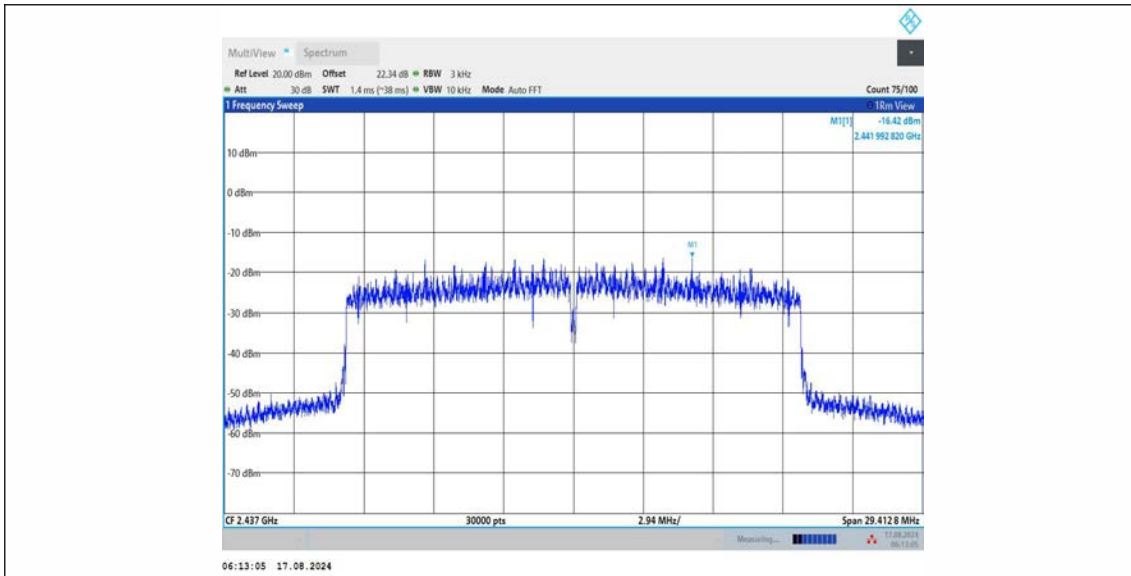


11AX20MIMO_Ant1_2462

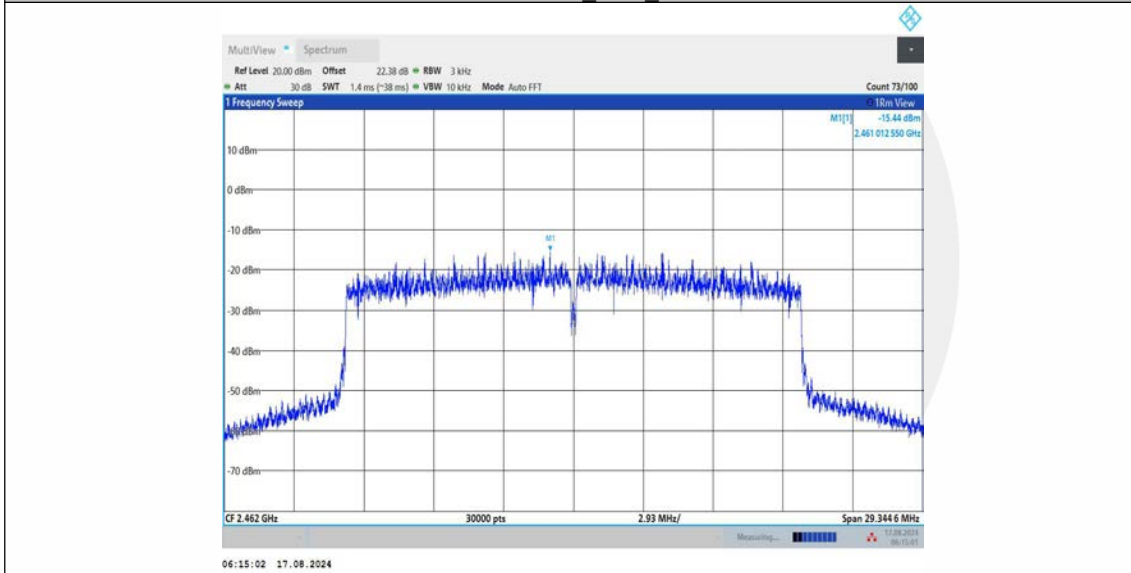


11AX20MIMO_Ant2_2462

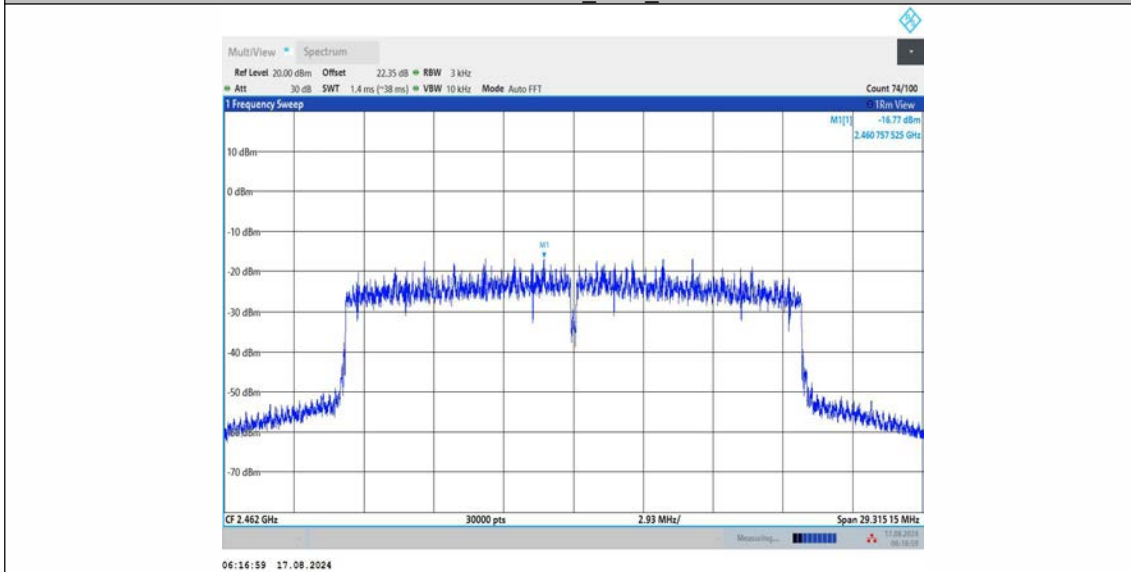


11AX40MIMO_Ant1_2422

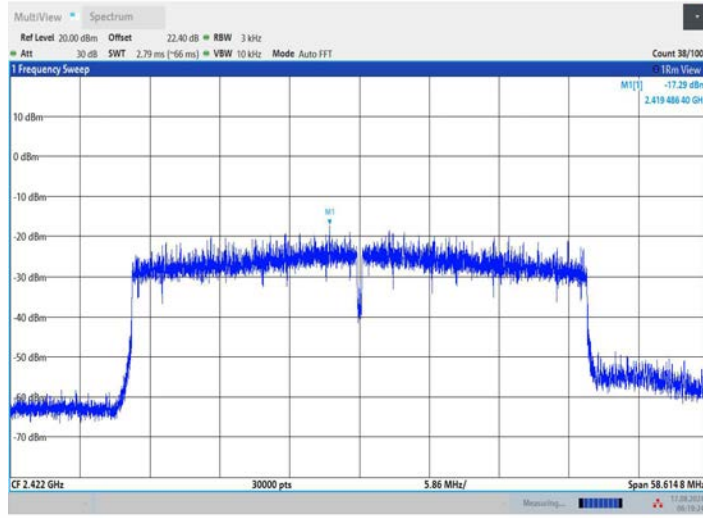


11AX40MIMO_Ant2_2422

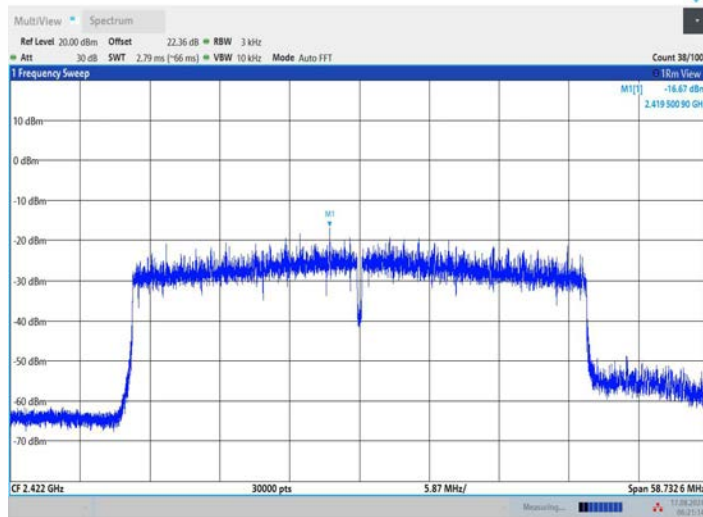


11AX40MIMO_Ant1_2437

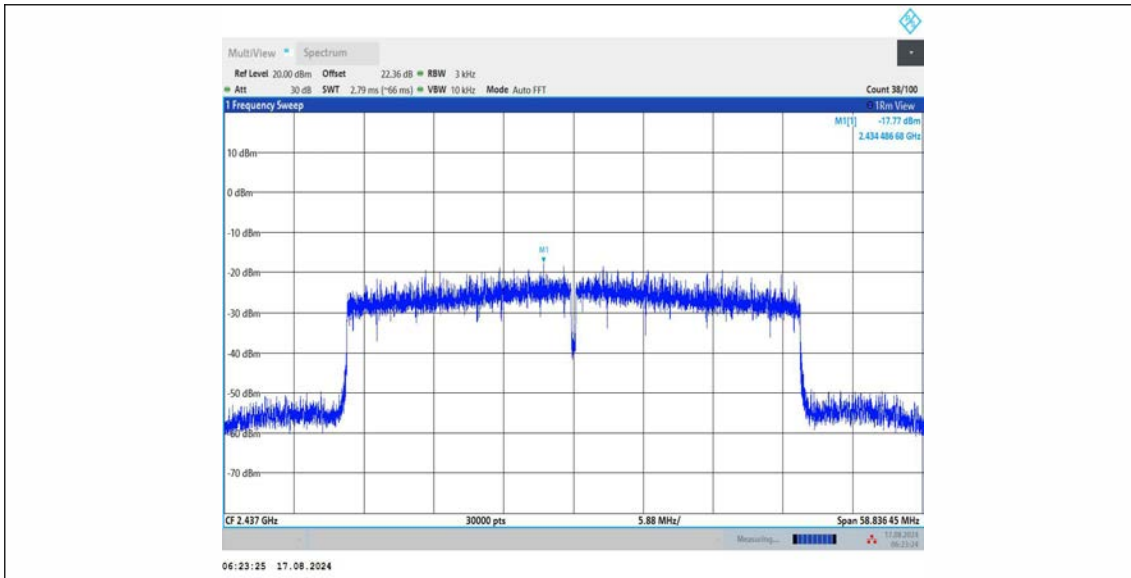


11AX40MIMO_Ant2_2437

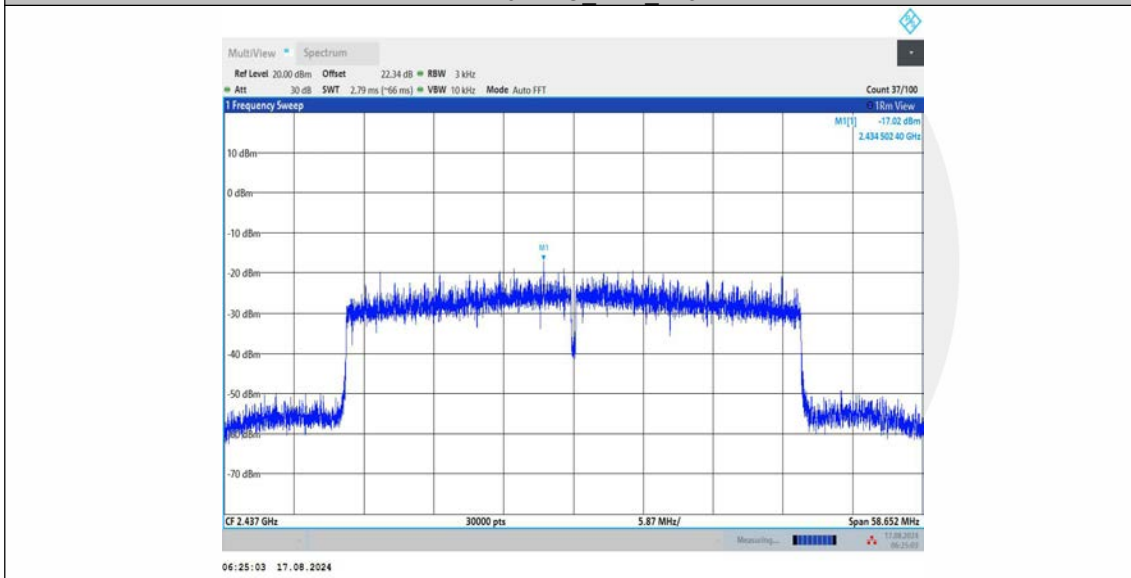


11AX40MIMO_Ant1_2452

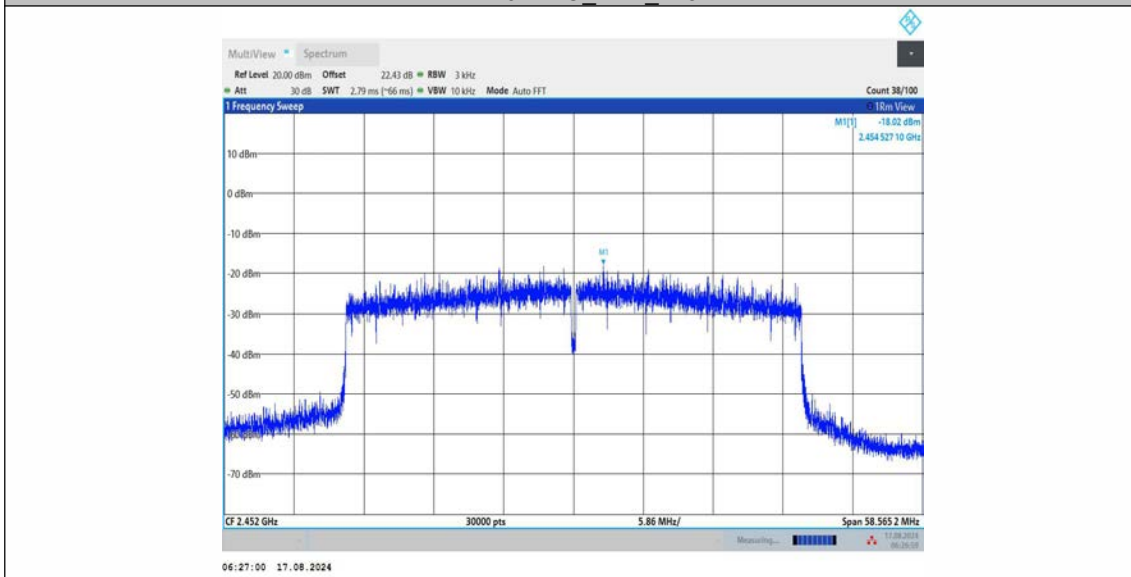


11AX40MIMO_Ant2_2452

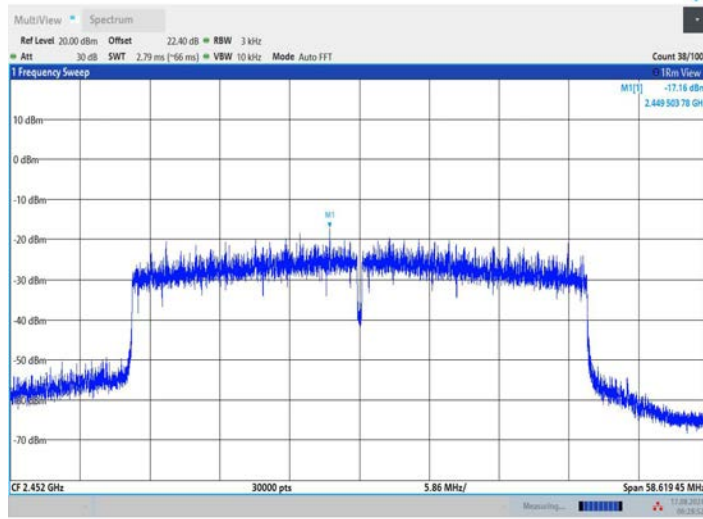


11BE20MIMO_Ant1_2412

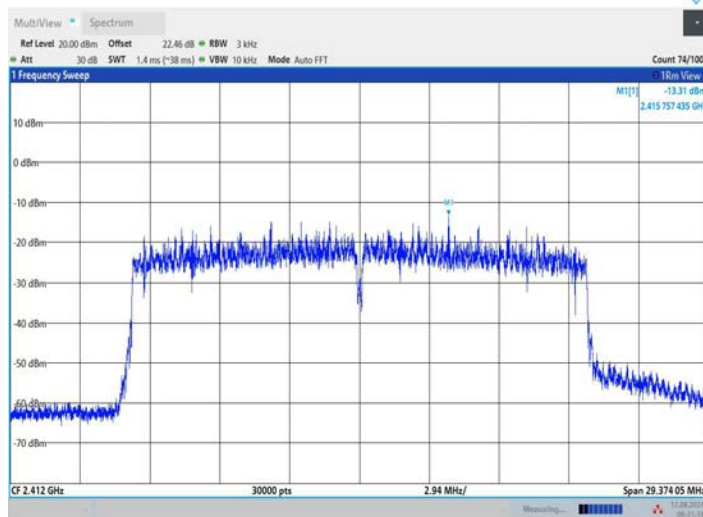


11BE20MIMO_Ant2_2412

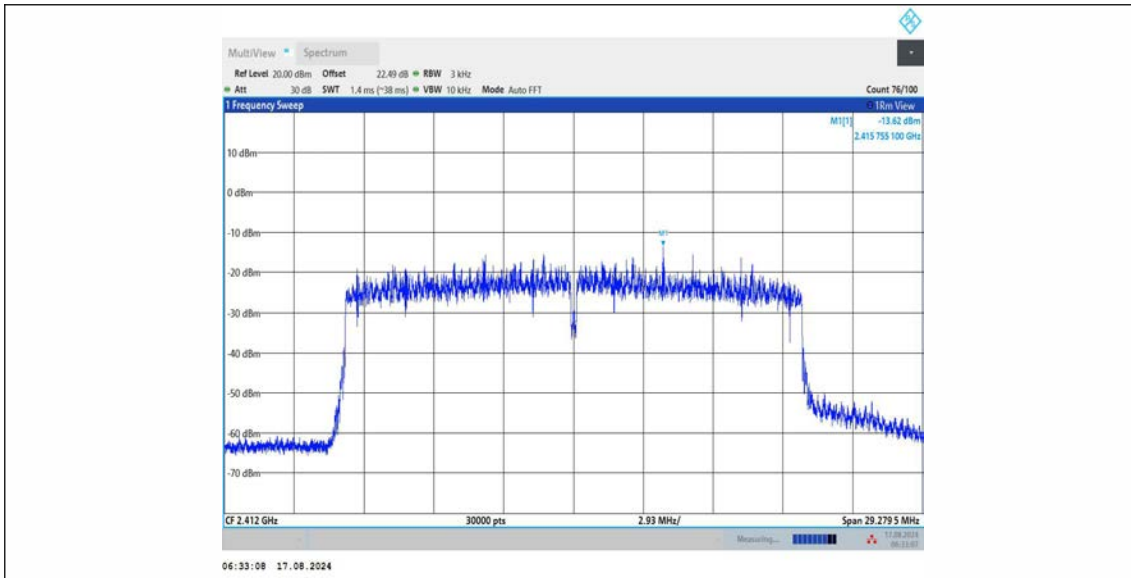


11BE20MIMO_Ant1_2437

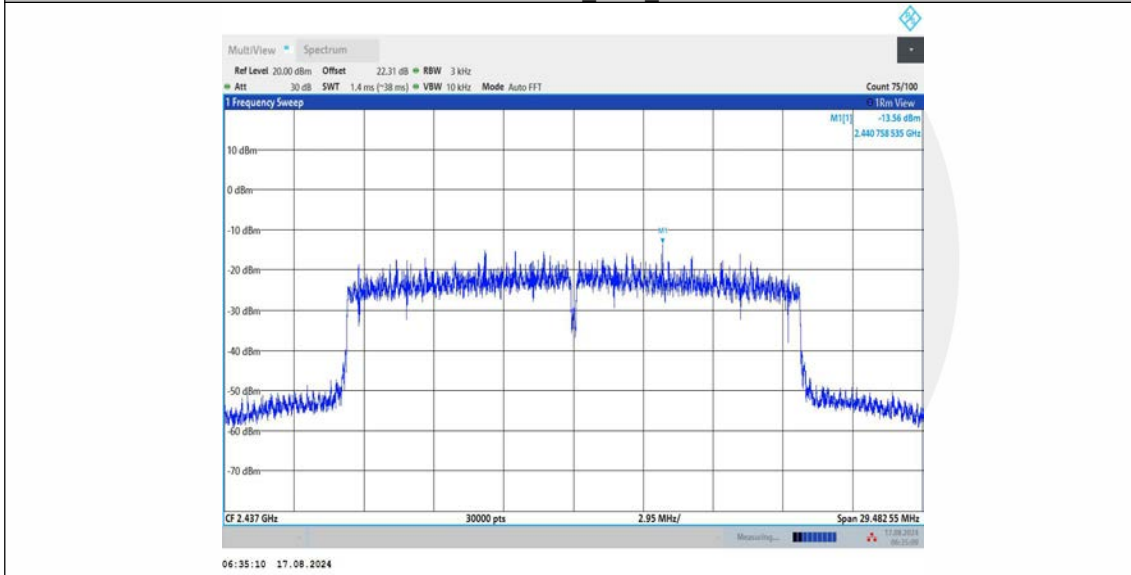


11BE20MIMO_Ant2_2437

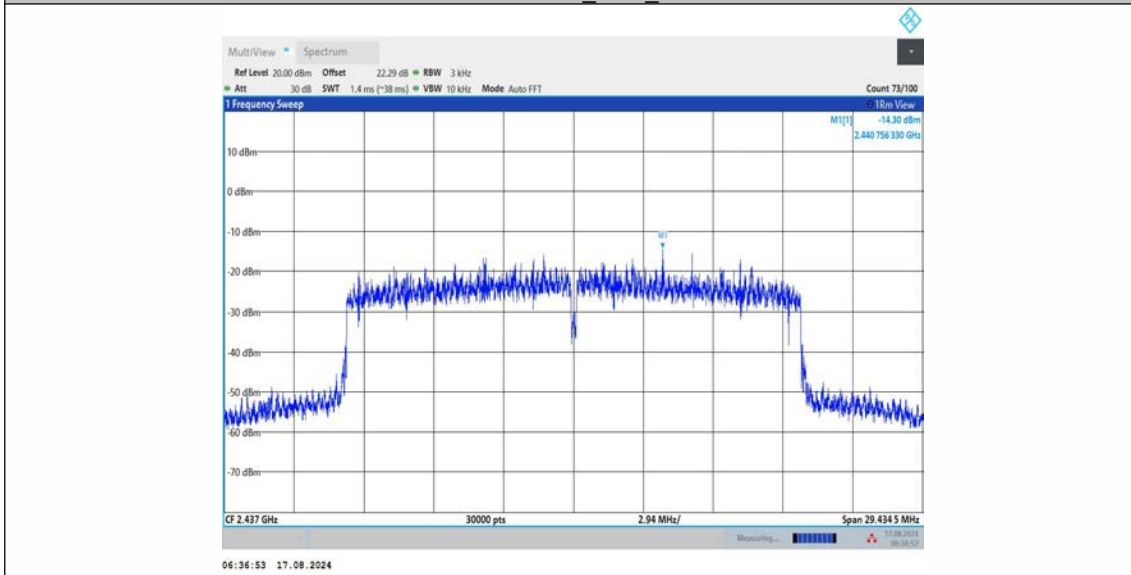


11BE20MIMO_Ant1_2462

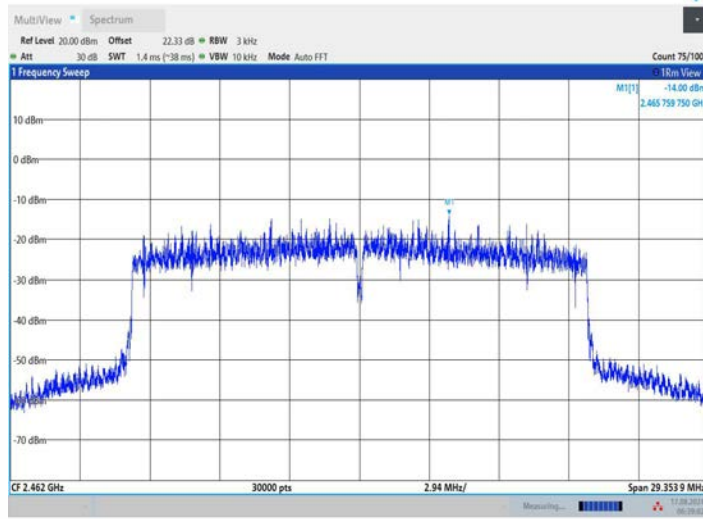


11BE20MIMO_Ant2_2462

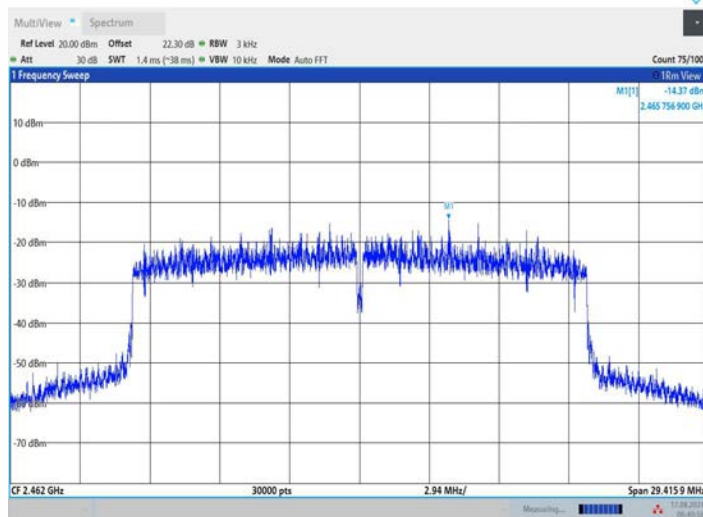


11BE40MIMO_Ant1_2422

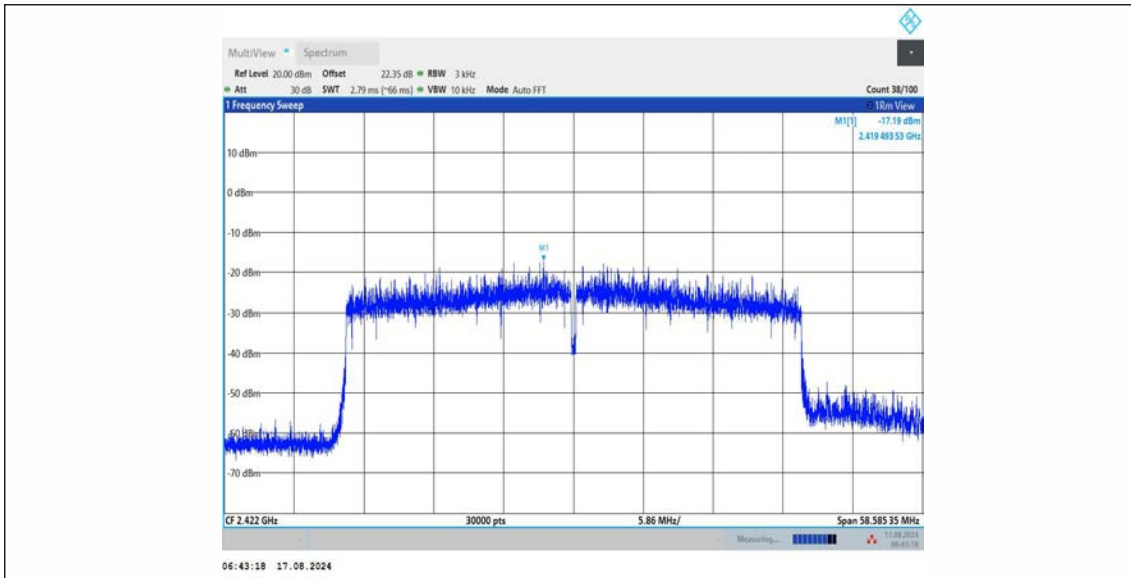


11BE40MIMO_Ant2_2422

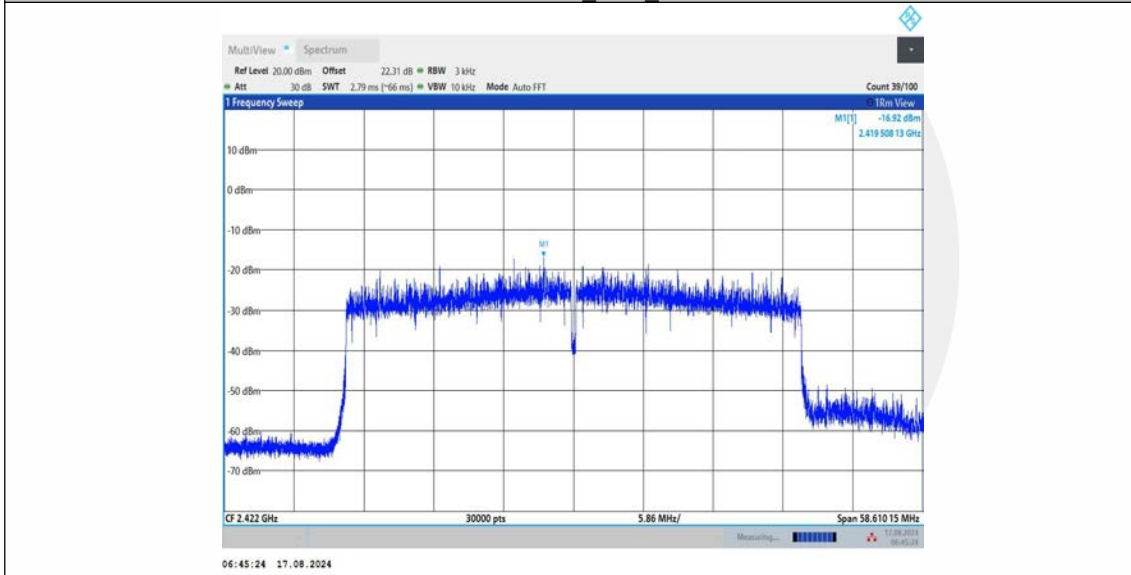


11BE40MIMO_Ant1_2437

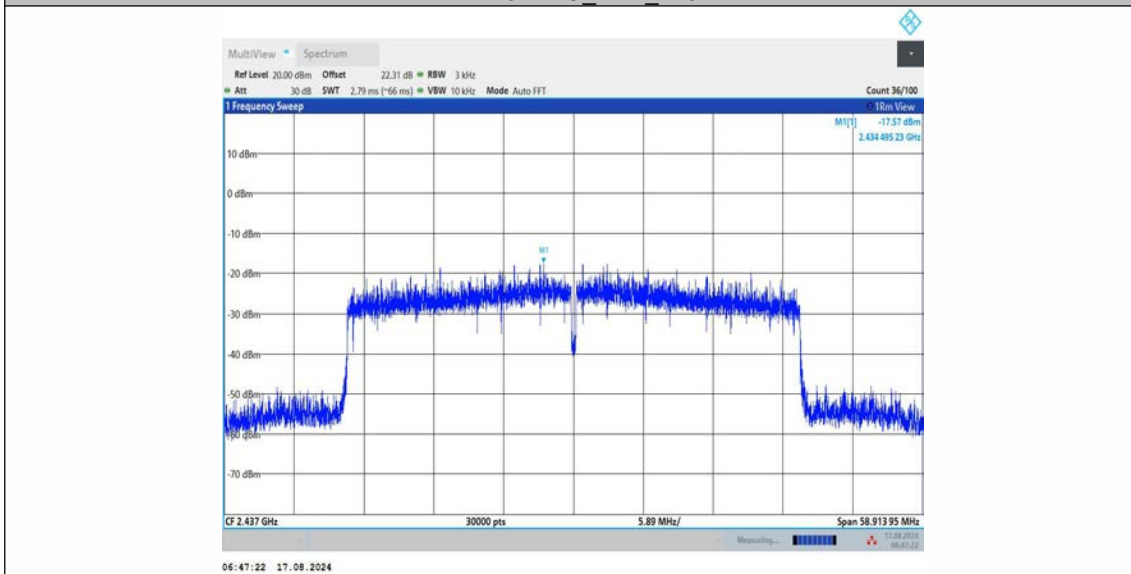


11BE40MIMO_Ant2_2437

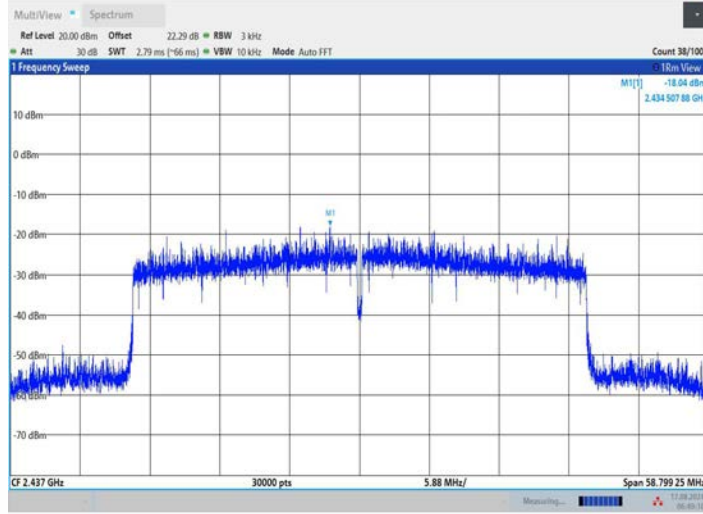

11BE40MIMO_Ant1_2452

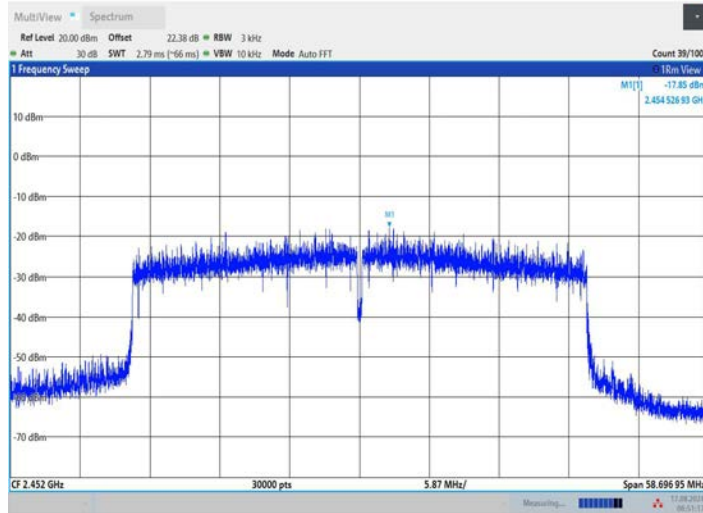

11BE40MIMO_Ant2_2452

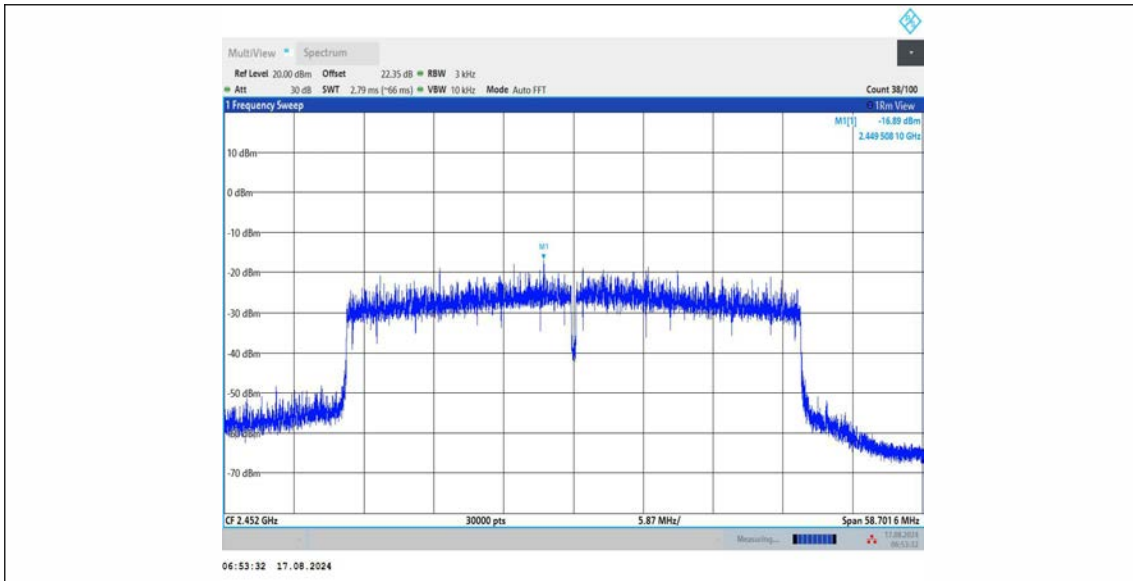

7.4 UNWANTED SPURIOUS EMISSIONS

7.4.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1.

7.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer.

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW =300 kHz.

Set Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

7.4.5 Test Results

Temperature :	25°C	ATM Pressure::	1011 mbar
Humidity :	45 %	Test Engineer:	GJ

All modulation modes were tested, and the worst data is shown in the table below:

Band edge measurements

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	6.41	-38.51	≤-23.59	PASS
	Ant2	Low	2412	5.67	-38.87	≤-24.33	PASS
	Ant1	High	2462	6.24	-39.06	≤-23.76	PASS
	Ant2	High	2462	5.56	-39.8	≤-24.44	PASS
11G	Ant1	Low	2412	3.61	-33.96	≤-26.39	PASS
	Ant2	Low	2412	2.89	-37.61	≤-27.11	PASS
	Ant1	High	2462	3.89	-39.96	≤-26.11	PASS
	Ant2	High	2462	2.66	-39.63	≤-27.34	PASS
11N20MIMO	Ant1	Low	2412	3.82	-33.85	≤-26.18	PASS
	Ant2	Low	2412	3.24	-35.1	≤-26.76	PASS
	Ant1	High	2462	4.05	-39	≤-25.95	PASS
	Ant2	High	2462	2.91	-39.61	≤-27.09	PASS
11N40MIMO	Ant1	Low	2422	1.59	-34.75	≤-28.41	PASS
	Ant2	Low	2422	1.25	-38.25	≤-28.75	PASS
	Ant1	High	2452	1.26	-38.2	≤-28.74	PASS
	Ant2	High	2452	0.73	-39.45	≤-29.27	PASS
11AX20MIMO	Ant1	Low	2412	3.47	-36.66	≤-26.53	PASS
	Ant2	Low	2412	3.16	-36.35	≤-26.84	PASS
	Ant1	High	2462	3.97	-39.76	≤-26.03	PASS
	Ant2	High	2462	2.63	-39.77	≤-27.37	PASS
11AX40MIMO	Ant1	Low	2422	1.55	-36.48	≤-28.45	PASS
	Ant2	Low	2422	1.25	-38.65	≤-28.75	PASS
	Ant1	High	2452	1.47	-36.29	≤-28.53	PASS
	Ant2	High	2452	0.91	-39.29	≤-29.09	PASS
11BE20MIMO	Ant1	Low	2412	3.94	-34.56	≤-26.06	PASS
	Ant2	Low	2412	3.04	-36.67	≤-26.96	PASS
	Ant1	High	2462	3.95	-38.7	≤-26.05	PASS
	Ant2	High	2462	2.99	-39.35	≤-27.01	PASS
11BE40MIMO	Ant1	Low	2422	1.54	-35.78	≤-28.46	PASS
	Ant2	Low	2422	1.26	-38.82	≤-28.74	PASS
	Ant1	High	2452	1.45	-37.16	≤-28.55	PASS
	Ant2	High	2452	0.96	-39.5	≤-29.04	PASS

Emission level measurement

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	6.45	6.45	---	PASS
			30~1000	6.45	-46.38	≤-23.55	PASS
			1000~26500	6.45	-42.12	≤-23.55	PASS
	Ant2	2412	Reference	5.64	5.64	---	PASS
			30~1000	5.64	-46.84	≤-24.36	PASS
			1000~26500	5.64	-41.91	≤-24.36	PASS
	Ant1	2437	Reference	6.28	6.28	---	PASS
			30~1000	6.28	-46.54	≤-23.72	PASS
			1000~26500	6.28	-42.22	≤-23.72	PASS
	Ant2	2437	Reference	5.41	5.41	---	PASS
			30~1000	5.41	-46.37	≤-24.59	PASS
			1000~26500	5.41	-42.06	≤-24.59	PASS
Ant1	2462	Reference	6.41	6.41	---	PASS	
		30~1000	6.41	-47.13	≤-23.59	PASS	
		1000~26500	6.41	-42.2	≤-23.59	PASS	


	Ant2	2462	Reference	5.43	5.43	---	PASS	
			30~1000	5.43	-46.68	≤ -24.57	PASS	
			1000~2650 0	5.43	-41.66	≤ -24.57	PASS	
11G	Ant1	2412	Reference	3.79	3.79	---	PASS	
			30~1000	3.79	-46.08	≤ -26.21	PASS	
			1000~2650 0	3.79	-41.87	≤ -26.21	PASS	
	Ant2	2412	Reference	3.05	3.05	---	PASS	
			30~1000	3.05	-46.27	≤ -26.95	PASS	
			1000~2650 0	3.05	-42.02	≤ -26.95	PASS	
	Ant1	2437	Reference	3.76	3.76	---	PASS	
			30~1000	3.76	-46.06	≤ -26.24	PASS	
			1000~2650 0	3.76	-42.34	≤ -26.24	PASS	
	Ant2	2437	Reference	2.95	2.95	---	PASS	
			30~1000	2.95	-46.83	≤ -27.05	PASS	
			1000~2650 0	2.95	-42.78	≤ -27.05	PASS	
	Ant1	2462	Reference	4.00	4.00	---	PASS	
			30~1000	4.00	-45.87	≤ -26	PASS	
			1000~2650 0	4.00	-42.54	≤ -26	PASS	
	Ant2	2462	Reference	2.58	2.58	---	PASS	
			30~1000	2.58	-46.41	≤ -27.42	PASS	
			1000~2650 0	2.58	-42.63	≤ -27.42	PASS	
	11N20MI MO	Ant1	2412	Reference	3.85	3.85	---	PASS
				30~1000	3.85	-45.51	≤ -26.15	PASS
				1000~2650 0	3.85	-42.11	≤ -26.15	PASS
		Ant2	2412	Reference	3.25	3.25	---	PASS
				30~1000	3.25	-46.37	≤ -26.75	PASS
				1000~2650 0	3.25	-42.25	≤ -26.75	PASS
Ant1		2437	Reference	3.77	3.77	---	PASS	
			30~1000	3.77	-46.97	≤ -26.23	PASS	
			1000~2650 0	3.77	-42.28	≤ -26.23	PASS	
Ant2		2437	Reference	2.89	2.89	---	PASS	
			30~1000	2.89	-46.44	≤ -27.11	PASS	
			1000~2650 0	2.89	-41.57	≤ -27.11	PASS	
Ant1		2462	Reference	4.00	4.00	---	PASS	
			30~1000	4.00	-46.13	≤ -26	PASS	
			1000~2650 0	4.00	-41.4	≤ -26	PASS	
Ant2		2462	Reference	2.91	2.91	---	PASS	
			30~1000	2.91	-46.54	≤ -27.09	PASS	
			1000~2650 0	2.91	-42.74	≤ -27.09	PASS	
11N40MI MO		Ant1	2422	Reference	1.66	1.66	---	PASS
				30~1000	1.66	-46.22	≤ -28.34	PASS
				1000~2650 0	1.66	-42.35	≤ -28.34	PASS
		Ant2	2422	Reference	1.21	1.21	---	PASS
				30~1000	1.21	-45.36	≤ -28.79	PASS
				1000~2650 0	1.21	-42.55	≤ -28.79	PASS
	Ant1	2437	Reference	1.29	1.29	---	PASS	
			30~1000	1.29	-46.34	≤ -28.71	PASS	
			1000~2650	1.29	-41.95	≤ -28.71	PASS	

	Ant2	2437	0							
			Reference	0.93	0.93	---	PASS			
			30~1000	0.93	-45.83	≤-29.07	PASS			
				1000~2650 0	0.93	-42.65	≤-29.07	PASS		
				Ant1	2452	Reference	1.17	1.17	---	PASS
						30~1000	1.17	-45.72	≤-28.83	PASS
		Ant2	2452	1000~2650 0	1.17	-41.98	≤-28.83	PASS		
				Reference	0.78	0.78	---	PASS		
				30~1000	0.78	-45.69	≤-29.22	PASS		
				1000~2650 0	0.78	-42	≤-29.22	PASS		
	11AX20M IMO	Ant1	2412	Reference	3.51	3.51	---	PASS		
				30~1000	3.51	-46.34	≤-26.49	PASS		
1000~2650 0				3.51	-42.19	≤-26.49	PASS			
Ant2		2412	Reference	3.22	3.22	---	PASS			
			30~1000	3.22	-46.28	≤-26.78	PASS			
			1000~2650 0	3.22	-42.35	≤-26.78	PASS			
Ant1		2437	Reference	3.54	3.54	---	PASS			
			30~1000	3.54	-46.92	≤-26.46	PASS			
			1000~2650 0	3.54	-42.1	≤-26.46	PASS			
Ant2		2437	Reference	2.88	2.88	---	PASS			
			30~1000	2.88	-46.77	≤-27.12	PASS			
			1000~2650 0	2.88	-41.9	≤-27.12	PASS			
Ant1		2462	Reference	4.00	4.00	---	PASS			
			30~1000	4.00	-46.64	≤-26	PASS			
			1000~2650 0	4.00	-42.55	≤-26	PASS			
Ant2		2462	Reference	2.72	2.72	---	PASS			
			30~1000	2.72	-45.3	≤-27.28	PASS			
			1000~2650 0	2.72	-42.5	≤-27.28	PASS			
11AX40M IMO		Ant1	2422	Reference	1.52	1.52	---	PASS		
				30~1000	1.52	-46.2	≤-28.48	PASS		
				1000~2650 0	1.52	-42.35	≤-28.48	PASS		
		Ant2	2422	Reference	1.26	1.26	---	PASS		
				30~1000	1.26	-46.38	≤-28.74	PASS		
				1000~2650 0	1.26	-41.93	≤-28.74	PASS		
	Ant1	2437	Reference	1.71	1.71	---	PASS			
			30~1000	1.71	-45.39	≤-28.29	PASS			
			1000~2650 0	1.71	-42.23	≤-28.29	PASS			
	Ant2	2437	Reference	0.79	0.79	---	PASS			
			30~1000	0.79	-45.74	≤-29.21	PASS			
			1000~2650 0	0.79	-42.26	≤-29.21	PASS			
	Ant1	2452	Reference	1.31	1.31	---	PASS			
			30~1000	1.31	-46.64	≤-28.69	PASS			
			1000~2650 0	1.31	-41.73	≤-28.69	PASS			
	Ant2	2452	Reference	0.87	0.87	---	PASS			
			30~1000	0.87	-45.52	≤-29.13	PASS			
			1000~2650 0	0.87	-41.71	≤-29.13	PASS			
11BE20M IMO	Ant1	2412	Reference	4.00	4.00	---	PASS			
			30~1000	4.00	-46.53	≤-26	PASS			

11BE40M IMO	Ant2	2412	1000~2650 0	4.00	-42.14	≤-26	PASS	
			Reference	3.05	3.05	---	PASS	
			30~1000	3.05	-46.24	≤-26.95	PASS	
	Ant1	2437	1000~2650 0	3.05	-42.22	≤-26.95	PASS	
			Reference	3.92	3.92	---	PASS	
			30~1000	3.92	-46.36	≤-26.08	PASS	
	Ant2	2437	1000~2650 0	3.92	-41.61	≤-26.08	PASS	
			Reference	2.70	2.70	---	PASS	
			30~1000	2.70	-46.63	≤-27.3	PASS	
	Ant1	2462	1000~2650 0	2.70	-42	≤-27.3	PASS	
			Reference	4.04	4.04	---	PASS	
			30~1000	4.04	-46.27	≤-25.96	PASS	
	Ant2	2462	1000~2650 0	4.04	-42.43	≤-25.96	PASS	
			Reference	2.88	2.88	---	PASS	
			30~1000	2.88	-46.6	≤-27.12	PASS	
	11BE40M IMO	Ant1	2422	1000~2650 0	2.88	-41.98	≤-27.12	PASS
				Reference	1.56	1.56	---	PASS
				30~1000	1.56	-45.66	≤-28.44	PASS
		Ant2	2422	1000~2650 0	1.56	-41.99	≤-28.44	PASS
				Reference	1.30	1.30	---	PASS
				30~1000	1.30	-45.29	≤-28.7	PASS
		Ant1	2437	1000~2650 0	1.30	-41.52	≤-28.7	PASS
				Reference	1.80	1.80	---	PASS
				30~1000	1.80	-44.37	≤-28.2	PASS
Ant2		2437	1000~2650 0	1.80	-42.26	≤-28.2	PASS	
			Reference	0.79	0.79	---	PASS	
			30~1000	0.79	-45.5	≤-29.21	PASS	
Ant1		2452	1000~2650 0	0.79	-42.14	≤-29.21	PASS	
			Reference	1.48	1.48	---	PASS	
			30~1000	1.48	-44.82	≤-28.52	PASS	
Ant2		2452	1000~2650 0	1.48	-42.09	≤-28.52	PASS	
			Reference	0.91	0.91	---	PASS	
			30~1000	0.91	-45.87	≤-29.09	PASS	
Ant1		2452	1000~2650 0	0.91	-42.1	≤-29.09	PASS	
			Reference	0.91	0.91	---	PASS	
			30~1000	0.91	-45.87	≤-29.09	PASS	


Band edge measurements

11B_Ant1_Low_2412

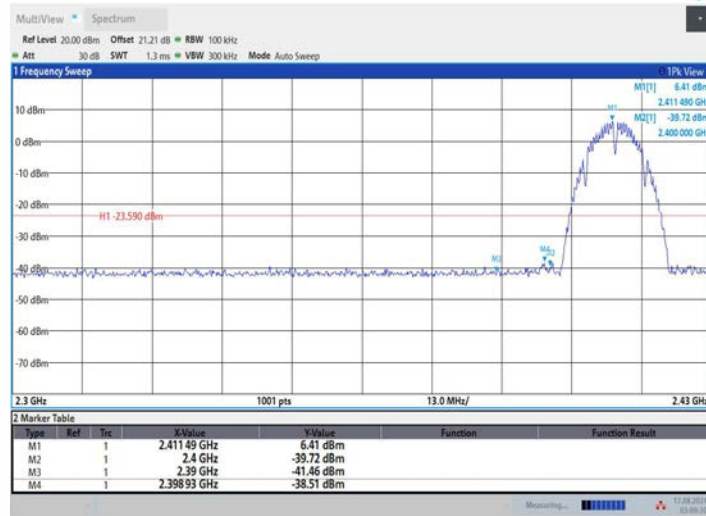

03:09:31 17.08.2024

11B_Ant2_Low_2412

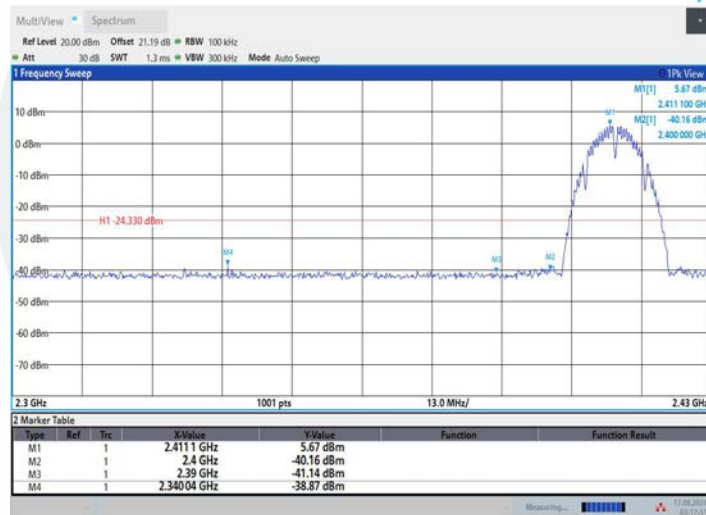

03:17:51 17.08.2024

11B_Ant1_High_2462