



**FCC Part15, Subpart B**

**TEST REPORT**

*For*

**Cuckoo Clock**

**MODEL NUMBER: P3NEC4**

**FCC ID: 2AX7P-7463**

**REPORT NUMBER: 4789734007-8**

**ISSUE DATE: January 22, 2021**

*Prepared for*

**Metavolcanic Rock LLC  
113 South Monroe Street Tallahassee, FL 32301**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.





Revision History

Rev.	Issue Date	Revisions	Revised By
V0	01/22/2020	Initial Issue	



Summary of Test Results				
Standard	Test Item	Limit	Result	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Disturbance	Class B	PASS	
	Radiated Disturbance below 1 GHz	Class B	PASS	
	Radiated Disturbance above 1 GHz	Class B	PASS	NOTE (1)

Note:

(1) If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.

(2) This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

(3) The measurement result for the sample received is <Pass> according to < FCC Part15, Subpart B > when <Accuracy Method> decision rule is applied.



## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>6</b>
<b>2. TEST METHODOLOGY</b> .....	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>TEST MODE</i> .....	9
5.3. <i>EUT ACCESSORY</i> .....	9
5.4. <i>SUPPORT UNITS FOR SYSTEM TEST</i> .....	9
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED</b> .....	<b>10</b>
<b>7. EMISSION TEST</b> .....	<b>11</b>
7.1. <i>CONDUCTED EMISSIONS MEASUREMENT</i> .....	11
7.2. <i>RADIATED EMISSIONS MEASUREMENT</i> .....	15



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Metavolcanic Rock LLC  
Address: 113 South Monroe Street Tallahassee, FL 32301

## Manufacturer Information

Company Name: TCL Technoly Electronics (Huizhou) Co., Ltd.  
Address: Section 37, Zhongkai High-tech Development Zone, Huizhou City, Guang Dong Province, P.R. China

## EUT Information

EUT Name: Cuckoo Clock  
Model: P3NEC4  
Brand: /  
Sample Status: Normal  
Sample ID: 3603512  
Sample Received Date: January 18, 2021  
Date of Tested: January 18~22, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part15, Subpart B	PASS

Prepared By:

Gary Zhang  
Project Engineer

Checked By:

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC Part15 Subpart B & ANSI C63.4-2014.

## 3. FACILITIES AND ACCREDITATION

<p>Accreditation Certificate</p>	<p><b>A2LA (Certificate No.: 4102.01)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Recognized No.: CN1187)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.          Facility Name:          Chamber D, the VCCI registration No. is G-20019 and R-20004          Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
----------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Note: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People’s Republic of China.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions from the AC mains power ports	0.009MHz ~ 0.15MHz	2	4.00
Conducted emissions from the AC mains power ports	0.15MHz ~ 30MHz	2	3.62
Radiated emissions	30MHz ~ 1GHz	2	4.00
Radiated emissions	1GHz ~ 18GHz	2	5.78

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.





## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Cuckoo Clock
Model	P3NEC4
Power supply	DC 6V (via dry battery) DC 5V (via USB Type-C)

### 5.2. TEST MODE

Test Mode	Description
Mode 1	Running with DC 5V via USB Type-C
Mode 2	Running with DC 6V via dry battery

### 5.3. EUT ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

Note: No accessory

### 5.4. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Specification	Series No.
1	Mobile Phone	HUAWEI	ALP-AL00	/	/
2	Adapter	SAMSUNG	ETA-U90CBC	5Vdc,2A	RT4DC06PS/B-E

The following cables were used to form a representative test configuration during the tests.

Item	Type of cable	Shielded Type	Ferrite Core	Specification
1	USB Type-C	NO	NO	1.0m

**6. MEASURING EQUIPMENT AND SOFTWARE USED**

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021
Software					
Description		Manufacturer	Name	Version	
Test Software for Conducted Emissions		Farad	EZ-EMC	Ver. UL-3A1	
Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 11, 2018	Aug. 10, 2021
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130939	Sept. 17, 2018	Sept. 17, 2021
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Nov. 12, 2020	Nov. 11, 2021
Software					
Description		Manufacturer	Name	Version	
Test Software for Radiated Emissions		Farad	EZ-EMC	Ver. UL-3A1	

## 7. EMISSION TEST

### 7.1. CONDUCTED EMISSIONS MEASUREMENT

#### LIMITS

CFR 47 FCC Part15 Subpart B				
FREQUENCY (MHz)	Class A (dB $\mu$ V)		Class B (dB $\mu$ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46*
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### TEST PROCEDURE

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
4. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

**TEST SETUP**

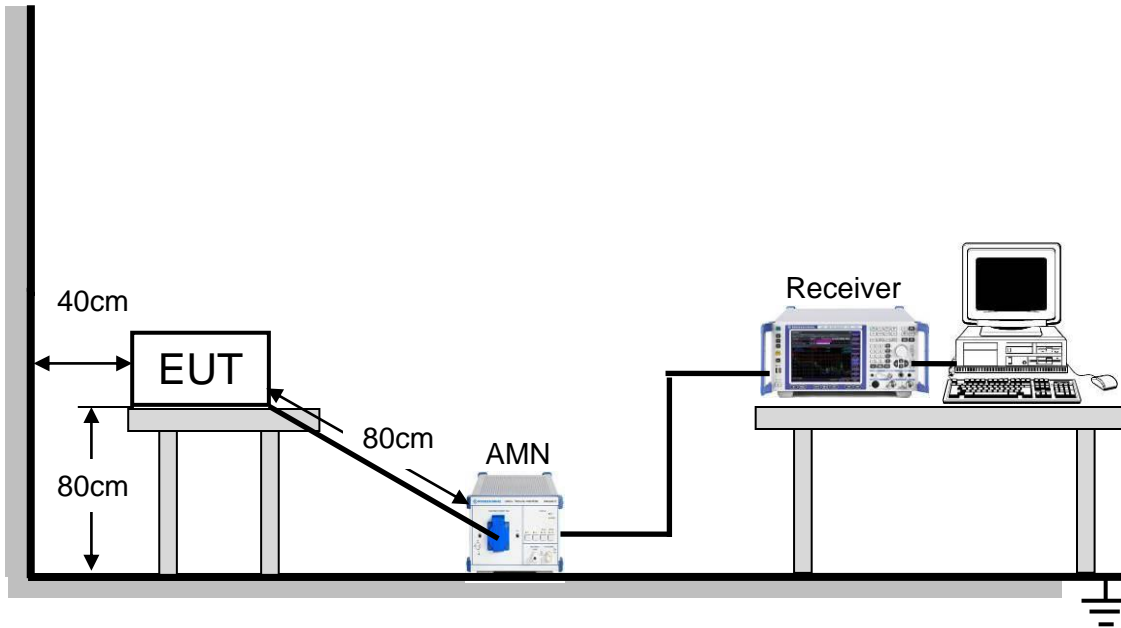

For the actual test configuration, please refer to Appendix I: Photographs of Test Configuration.

**TEST ENVIRONMENT**

Temperature	18.9°C	Relative Humidity	43.7%
Atmosphere Pressure	101 kPa		


**TEST MODE**

Pre-test Mode:	Mode 1
Final Test Mode:	Mode 1



**TEST RESULTS**

Conducted Emissions			
Test Mode:	Mode 1	Phase:	Line
Test Voltage	AC 120V/60Hz		

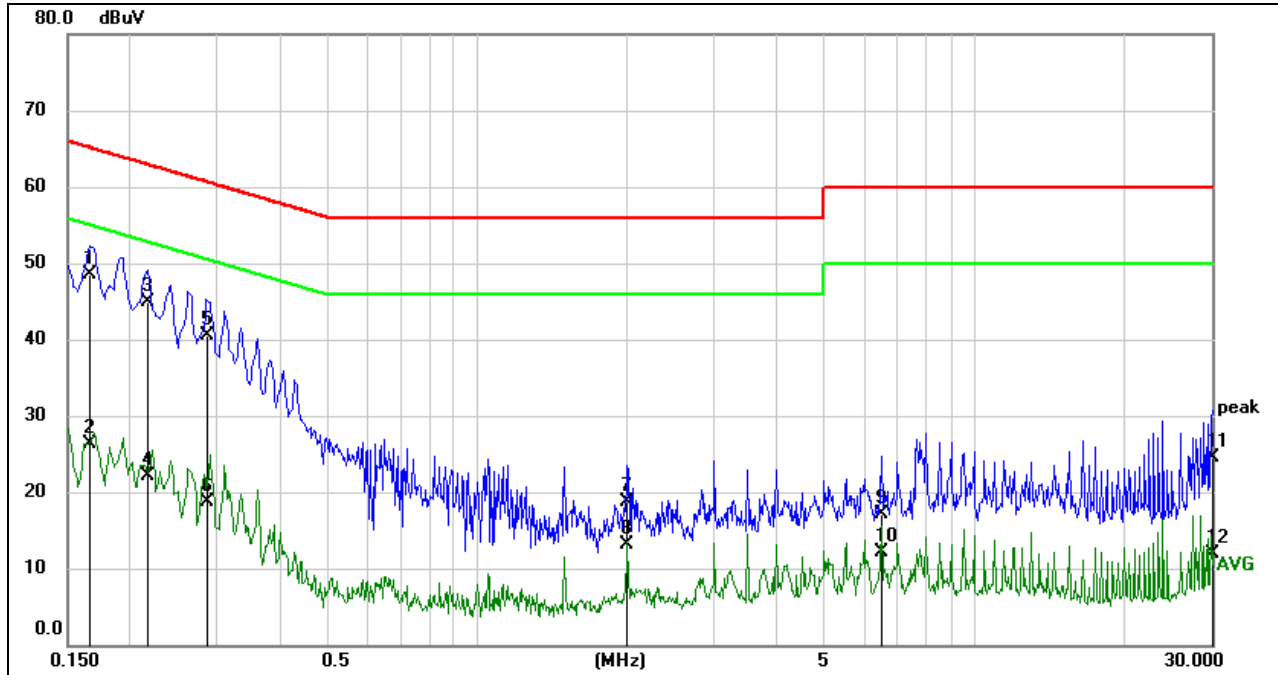


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1665	38.96	9.59	48.55	65.13	-16.58	QP
2	0.1665	16.73	9.59	26.32	55.13	-28.81	AVG
3	0.2175	35.33	9.59	44.92	62.91	-17.99	QP
4	0.2175	12.55	9.59	22.14	52.91	-30.77	AVG
5	0.2865	30.94	9.59	40.53	60.63	-20.10	QP
6	0.2865	9.09	9.59	18.68	50.63	-31.95	AVG
7	1.9987	9.13	9.63	18.76	56.00	-37.24	QP
8	1.9987	3.49	9.63	13.12	46.00	-32.88	AVG
9	6.4941	7.55	9.63	17.18	60.00	-42.82	QP
10	6.4941	2.38	9.63	12.01	50.00	-37.99	AVG
11	29.9752	14.53	9.88	24.41	60.00	-35.59	QP
12	29.9752	2.08	9.88	11.96	50.00	-38.04	AVG

Note: 1. Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)  
 2. Margin = Result - Limit



Conducted Emissions			
Test Mode:	Mode 1	Phase:	Neutral
Test Voltage	AC 120V/60Hz		

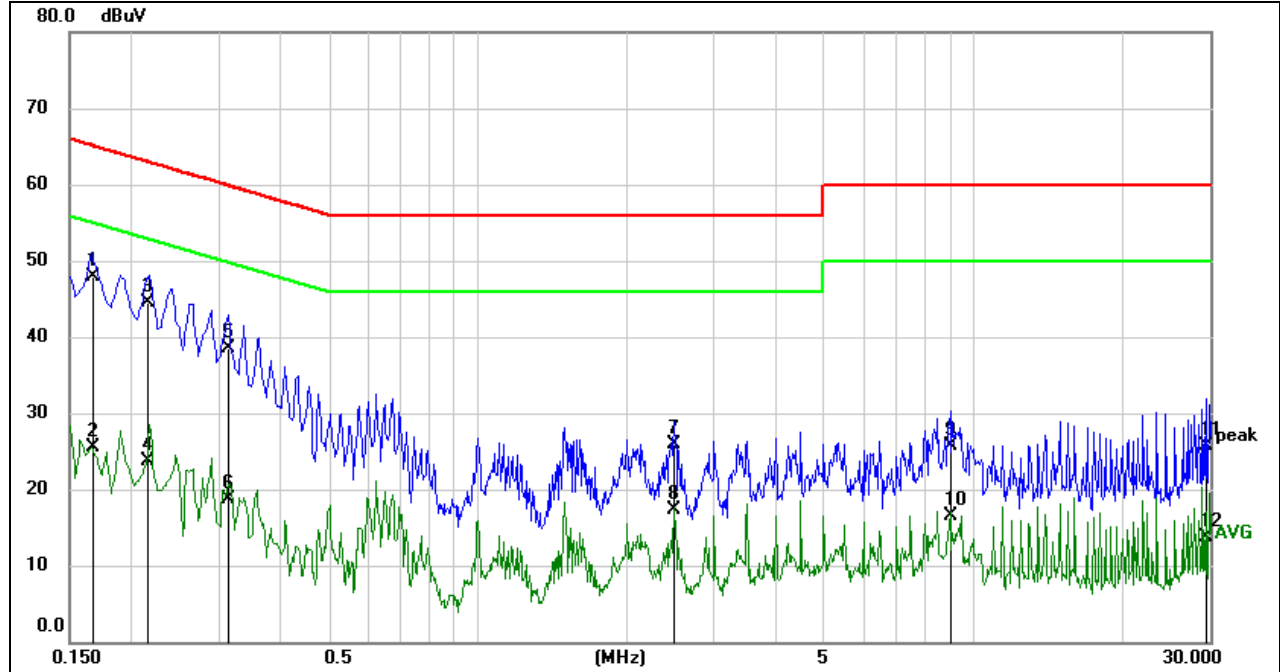

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1684	38.33	9.59	47.92	65.04	-17.12	QP
2	0.1684	15.88	9.59	25.47	55.04	-29.57	AVG
3	0.2159	34.91	9.59	44.50	62.98	-18.48	QP
4	0.2159	14.21	9.59	23.80	52.98	-29.18	AVG
5	0.3122	28.83	9.59	38.42	59.91	-21.49	QP
6	0.3122	9.16	9.59	18.75	49.91	-31.16	AVG
7	2.4949	16.22	9.62	25.84	56.00	-30.16	QP
8	2.4949	7.68	9.62	17.30	46.00	-28.70	AVG
9	8.9884	16.13	9.61	25.74	60.00	-34.26	QP
10	8.9884	6.87	9.61	16.48	50.00	-33.52	AVG
11	29.4857	15.84	9.79	25.63	60.00	-34.37	QP
12	29.4857	3.86	9.79	13.65	50.00	-36.35	AVG

Note: 1. Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)  
 2. Margin = Result - Limit

## 7.2. RADIATED EMISSIONS MEASUREMENT

### LIMITS

Below 1 GHz

CFR 47 FCC Part15 Subpart B			
Frequency (MHz)	Class A		Class B
	Field strength (uV/m) (at 10m)	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 - 88	90	49.5	40
88 - 216	150	53.9	43.5
216 - 960	210	56.9	46
Above 960	300	60	54

Above 1 GHz

CFR 47 FCC Part15 Subpart B						
Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

Test Frequency Range of Radiated Disturbance Measurement


Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

#### NOTE:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m),  
3m Emission level = 10m Emission level + 20log(10m/3m);

**TEST SETUP AND PROCEDURE**

Below 1G and above 30MHz

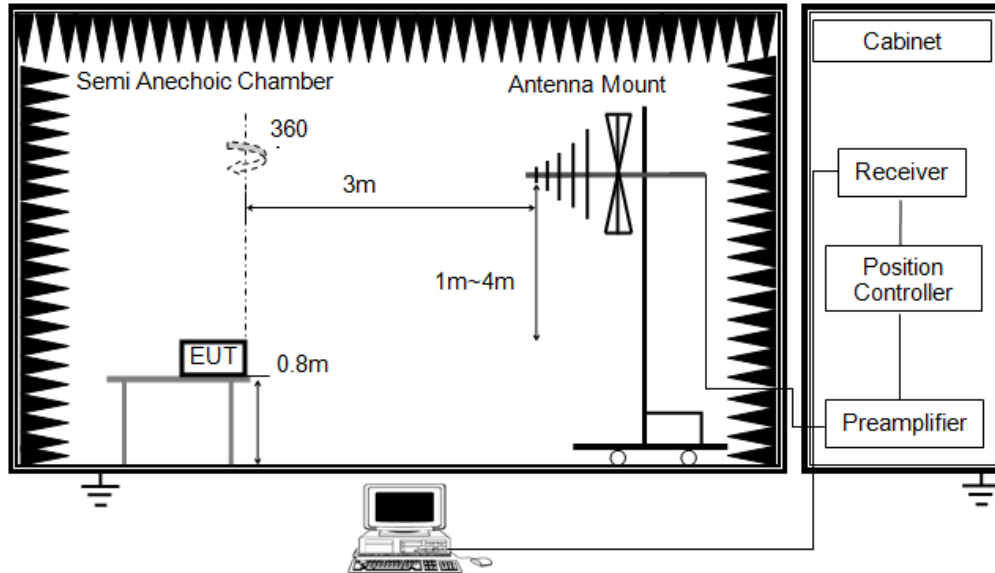


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak and QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp was used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
7. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
8. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.



Above 1G

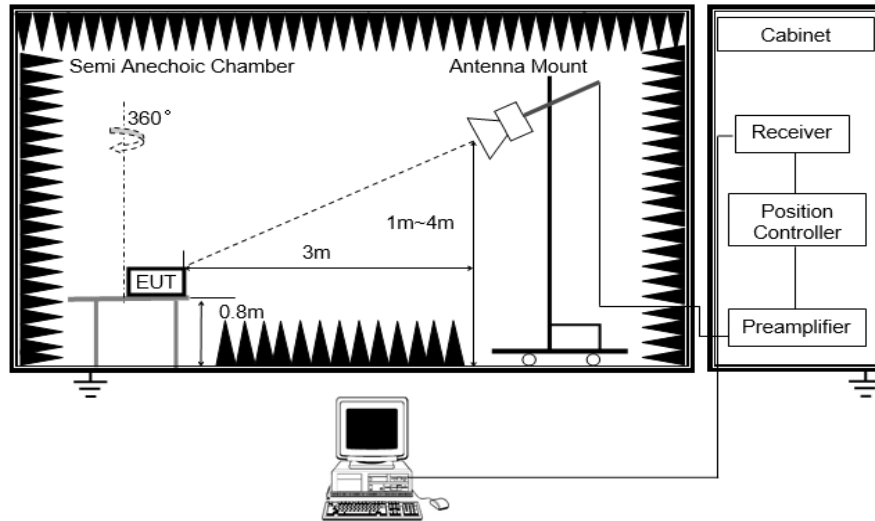

The setting of the spectrum analyser

RBW	1M
VBW	3M
Sweep	Auto
Detector	Peak: Peak AVG: RMS
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
7. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
8. For measurement above 1GHz, the peak emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the peak limit specified in Section 15.109. If peak result complies with average limit, average result is deemed to comply with average limit.
9. The average emission measurement will be measured by the RMS detector and must comply with the average limit specified in Section 15.109.



**TEST ENVIRONMENT**

Radiated Emissions - Below 1 GHz		Radiated Emissions - Above 1 GHz	
Temperature:	18.7 °C	Temperature:	19.3 °C
Humidity:	38.1 %	Humidity:	50.6%
Atmosphere Pressure	101 kPa	Atmosphere Pressure	101 kPa

**TEST MODE**


Radiated Emissions - Below 1 GHz		Radiated Emissions - Above 1 GHz	
Pre-test Mode:	Mode 1 & Mode 2	Pre-test Mode:	Mode 1 & Mode 2
Final Test Mode:	Mode 1 & Mode 2	Final Test Mode:	Mode 1

Note: All test modes had been tested, but only the worst data recorded in the report.



**TEST RESULTS**

Radiated Emissions – Below 1GHz			
Measurement Method	Radiated	Polar:	Horizontal
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

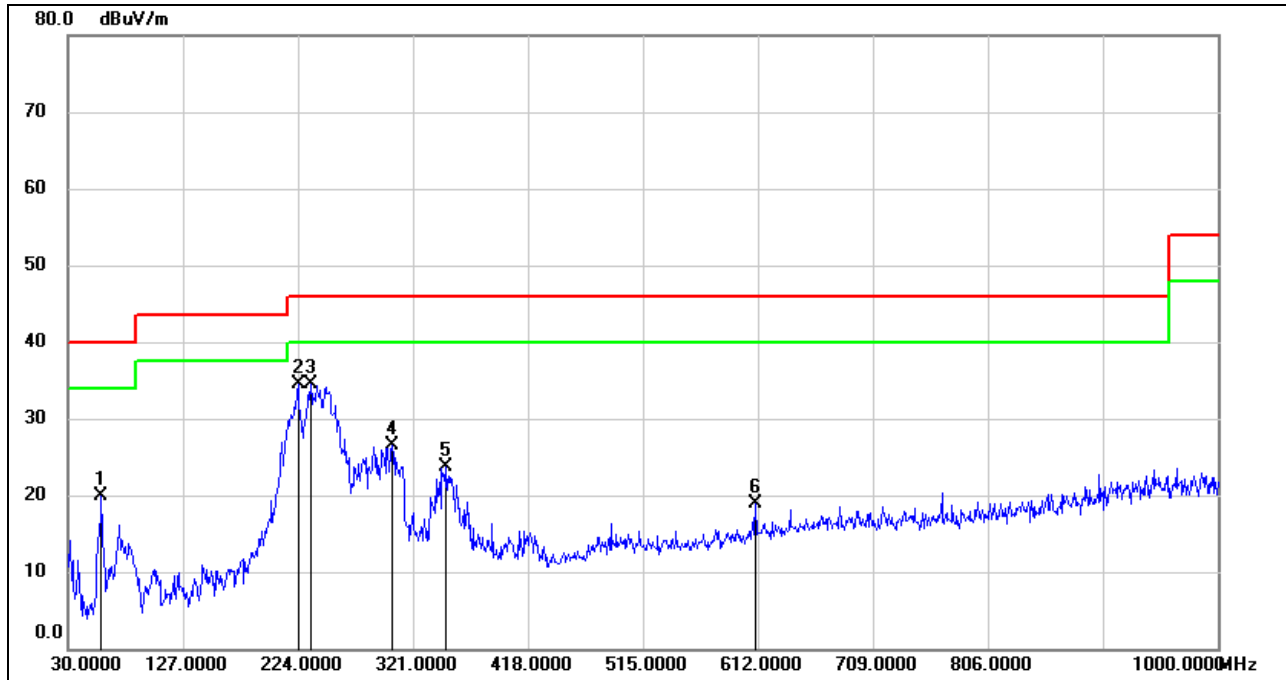


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	58.1300	40.44	-20.55	19.89	40.00	-20.11	QP
2	224.0000	52.81	-18.37	34.44	46.00	-11.56	QP
3	234.6700	53.36	-18.90	34.46	46.00	-11.54	QP
4	303.5400	41.76	-15.22	26.54	46.00	-19.46	QP
5	349.1300	38.00	-14.33	23.67	46.00	-22.33	QP
6	610.0600	28.38	-9.40	18.98	46.00	-27.02	QP

Note: 1. Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)  
2. Margin = Result - Limit



Radiated Emissions – Below 1GHz			
Measurement Method	Radiated	Polar:	Vertical
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

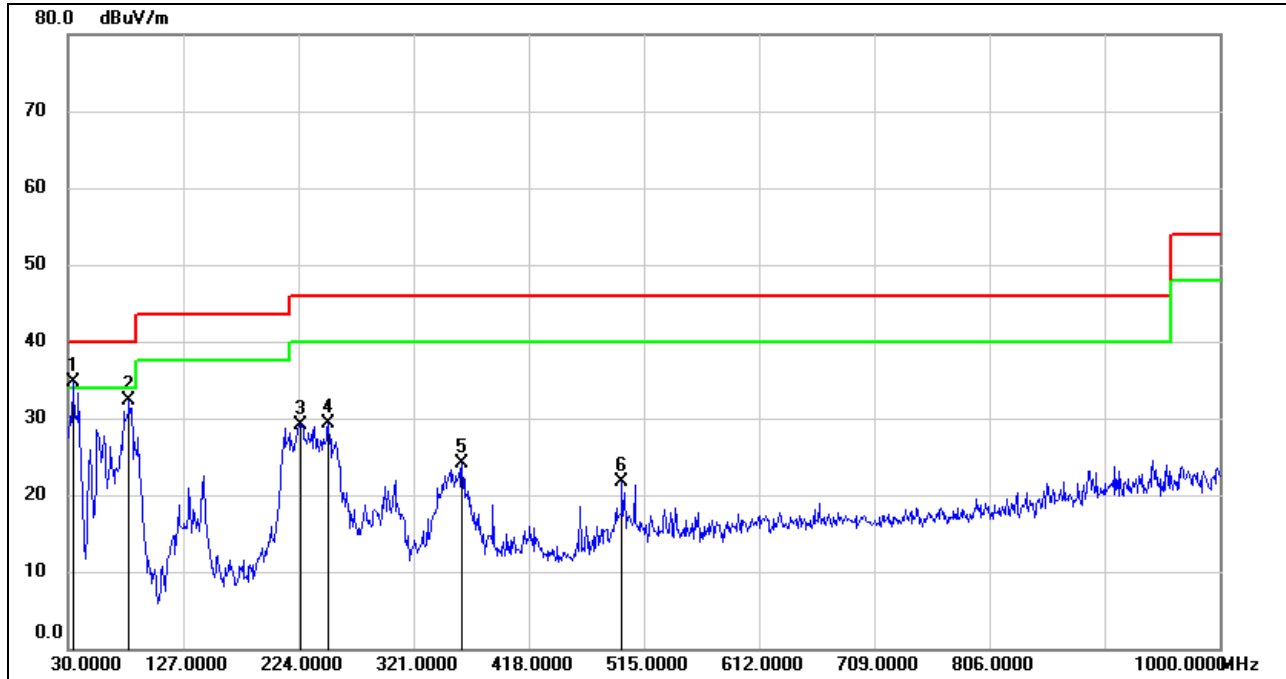


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	53.93	-19.31	34.62	40.00	-5.38	QP
2	81.4100	53.81	-21.44	32.37	40.00	-7.63	QP
3	225.9400	47.50	-18.47	29.03	46.00	-16.97	QP
4	249.2200	48.18	-18.94	29.24	46.00	-16.76	QP
5	361.7400	38.24	-14.08	24.16	46.00	-21.84	QP
6	496.5700	33.22	-11.55	21.67	46.00	-24.33	QP

Note: 1. Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)  
 2. Margin = Result - Limit



Radiated Emissions – Below 1GHz			
Measurement Method	Radiated	Polar:	Horizontal
Test Mode:	Mode 2	Test Voltage:	DC 6 V

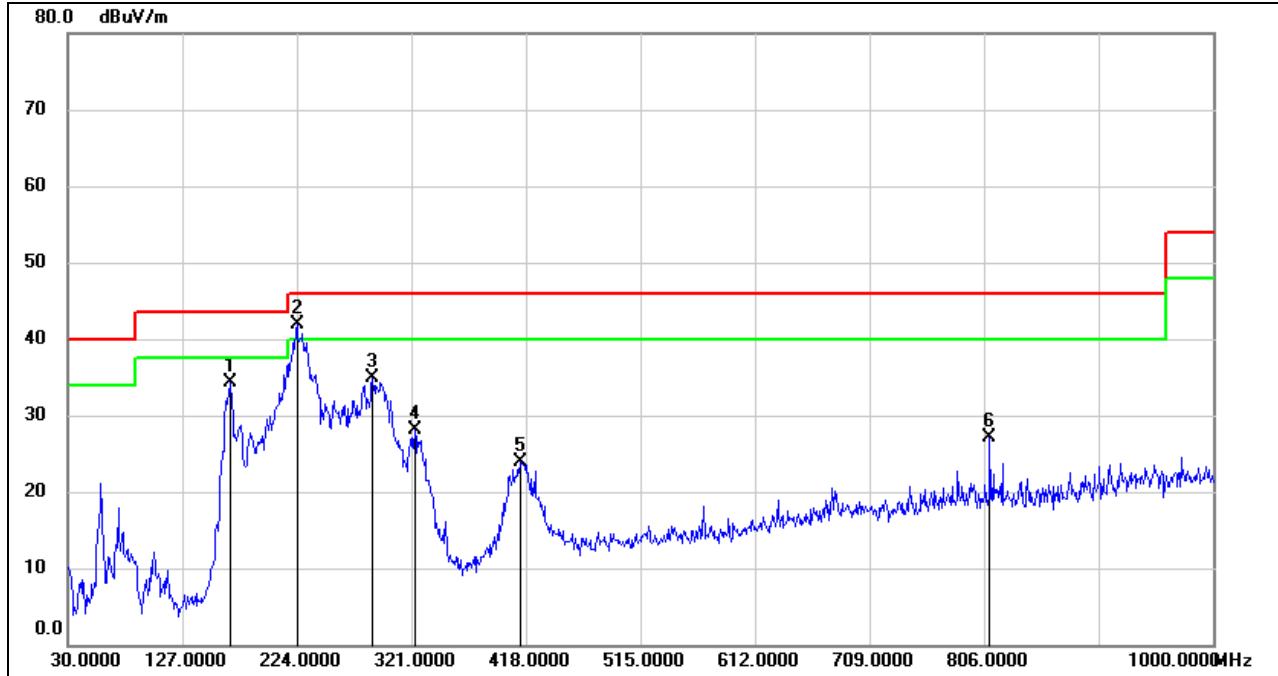


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	167.7400	51.71	-17.41	34.30	43.50	-9.20	QP
2	224.0000	60.24	-18.37	41.87	46.00	-4.13	QP
3	288.0200	50.93	-16.06	34.87	46.00	-11.13	QP
4	323.9100	42.76	-14.74	28.02	46.00	-17.98	QP
5	413.1500	37.04	-13.08	23.96	46.00	-22.04	QP
6	810.8500	34.14	-7.12	27.02	46.00	-18.98	QP

Note: 1. Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)  
 2. Margin = Result - Limit



Radiated Emissions – Below 1GHz			
Measurement Method	Radiated	Polar:	Vertical
Test Mode:	Mode 2	Test Voltage:	DC 6 V

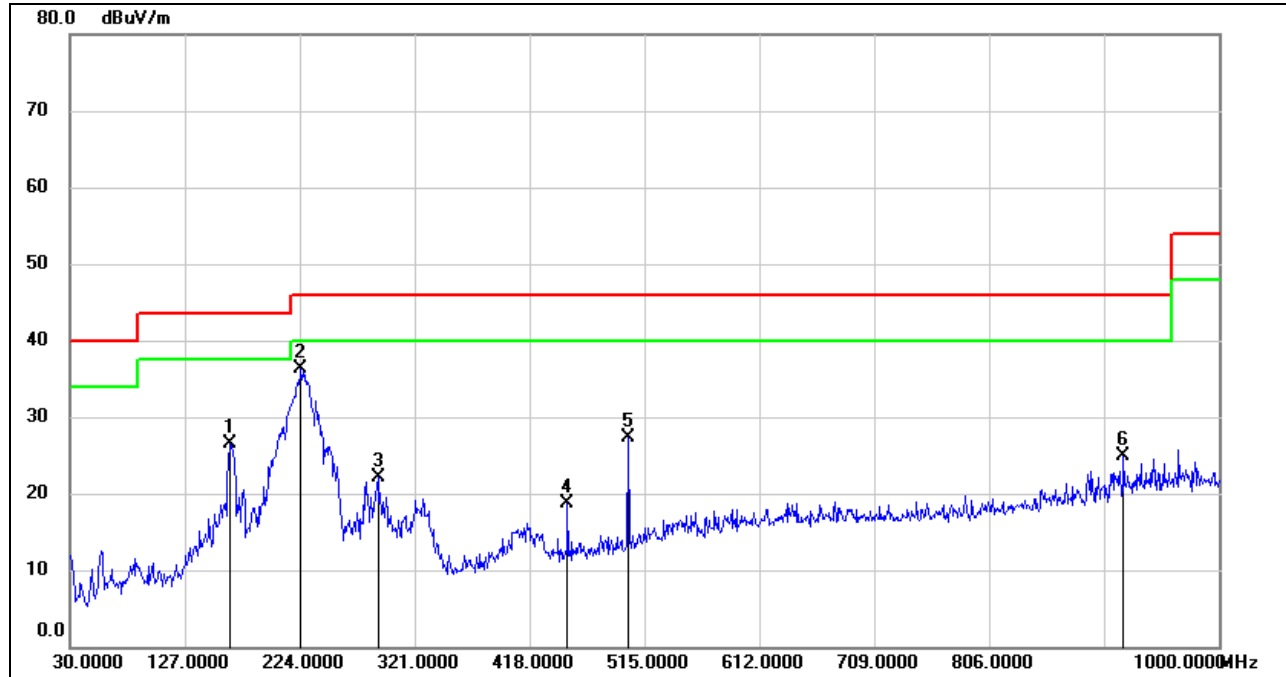


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	164.8300	43.96	-17.55	26.41	43.50	-17.09	QP
2	224.9700	54.69	-18.42	36.27	46.00	-9.73	QP
3	289.9600	38.03	-15.91	22.12	46.00	-23.88	QP
4	450.0100	31.24	-12.49	18.75	46.00	-27.25	QP
5	501.4200	38.78	-11.44	27.34	46.00	-18.66	QP
6	919.4900	29.72	-4.76	24.96	46.00	-21.04	QP

Note: 1. Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)  
 2. Margin = Result - Limit



Radiated Emissions – Above 1GHz			
Measurement Method	Radiated	Polar:	Horizontal
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

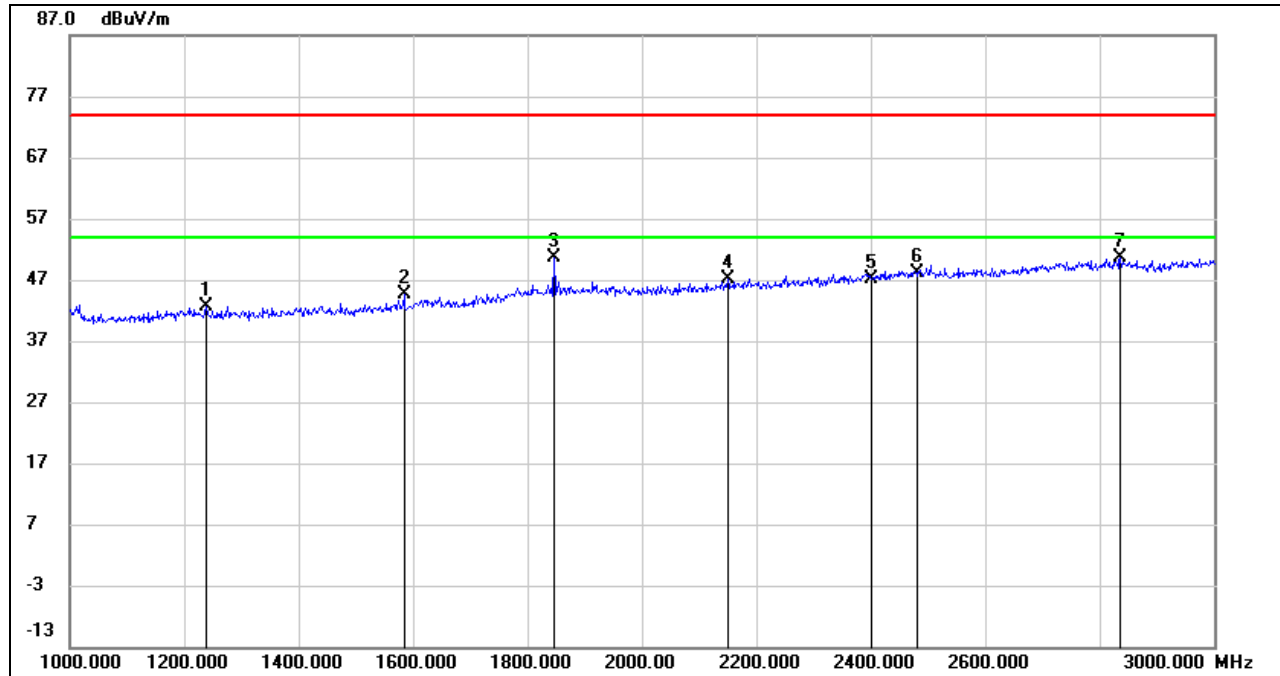


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1238.000	13.54	28.99	42.53	74.00	-31.47	peak
2	1584.000	14.77	29.95	44.72	74.00	-29.28	peak
3	1846.000	18.97	31.63	50.60	74.00	-23.40	peak
4	2150.000	14.86	32.26	47.12	74.00	-26.88	peak
5	2402.000	13.80	33.43	47.23	74.00	-26.77	peak
6	2480.000	14.50	33.69	48.19	74.00	-25.81	peak

- Note: 1. Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)  
 2. Margin = Result - Limit  
 3. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 4. Peak: Peak detector.



Radiated Emissions – Above 1GHz			
Measurement Method	Radiated	Polar:	Vertical
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

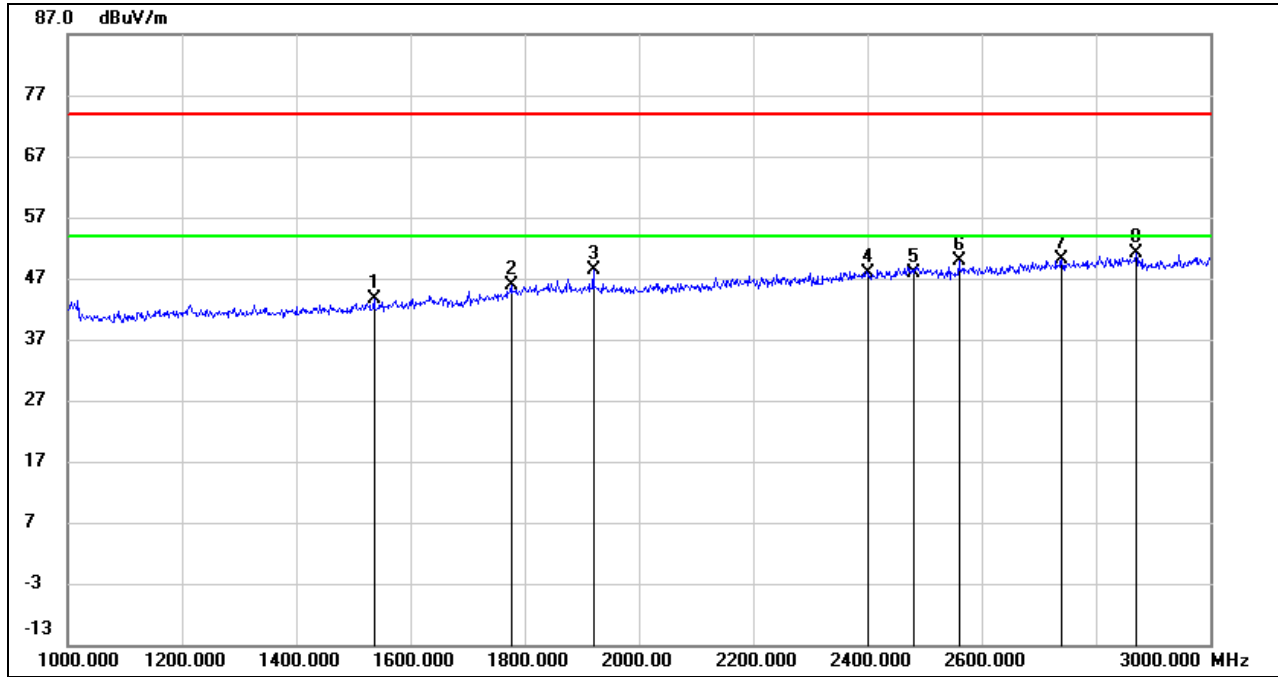


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.000	13.93	29.61	43.54	74.00	-30.46	peak
2	1776.000	14.65	31.17	45.82	74.00	-28.18	peak
3	1920.000	16.48	31.81	48.29	74.00	-25.71	peak
4	2402.000	14.41	33.43	47.84	74.00	-26.16	peak
5	2480.000	14.20	33.69	47.89	74.00	-26.11	peak
6	2560.000	16.25	33.58	49.83	74.00	-24.17	peak

- Note:
1. Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
  2. Margin = Result - Limit
  3. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  4. Peak: Peak detector.





Radiated Emissions – Above 1GHz			
Measurement Method	Radiated	Polar:	Horizontal
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

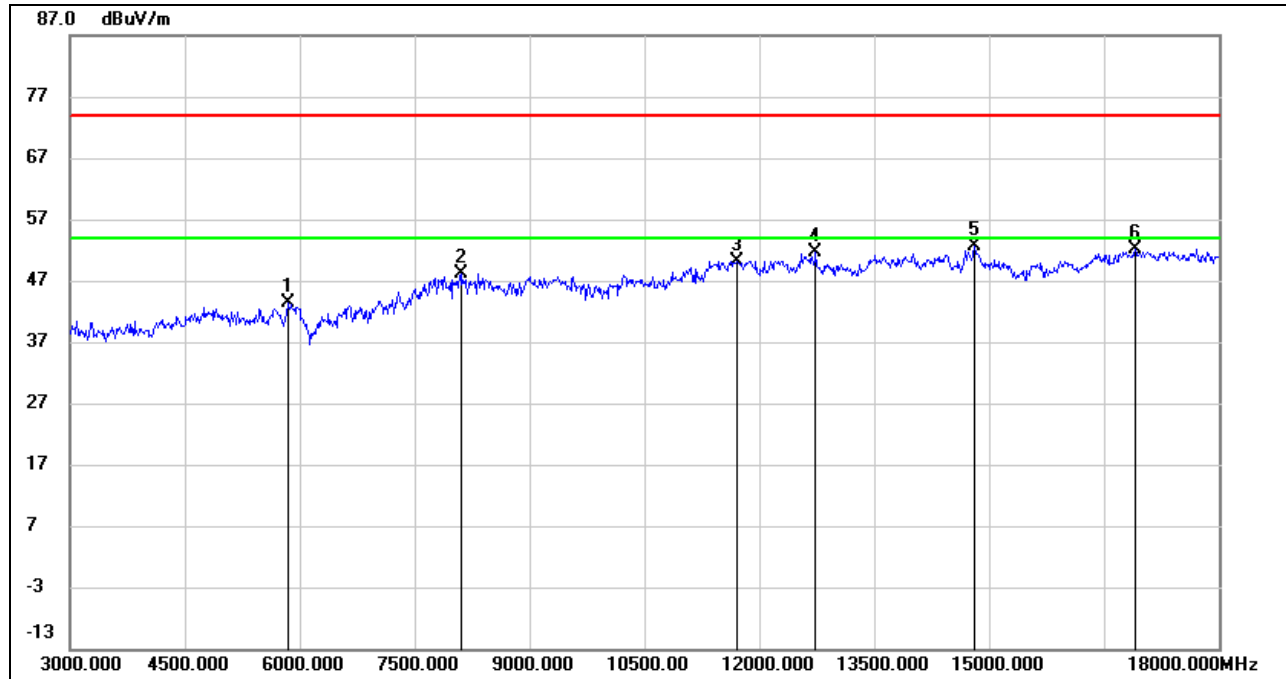

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	39.45	4.00	43.45	74.00	-30.55	peak
2	8115.000	38.08	10.13	48.21	74.00	-25.79	peak
3	11715.000	34.83	15.34	50.17	74.00	-23.83	peak
4	12735.000	35.76	15.75	51.51	74.00	-22.49	peak
5	14805.000	34.67	18.00	52.67	74.00	-21.33	peak
6	16905.000	30.66	21.55	52.21	74.00	-21.79	peak

Note: 1. Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor + High Pass Filter Loss Factor)

2. Margin = Result - Limit

3. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


4. Peak: Peak detector.

5. The high pass filter loss factor already add into the correct factor.

6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Radiated Emissions – Above 1GHz			
Measurement Method	Radiated	Polar:	Vertical
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

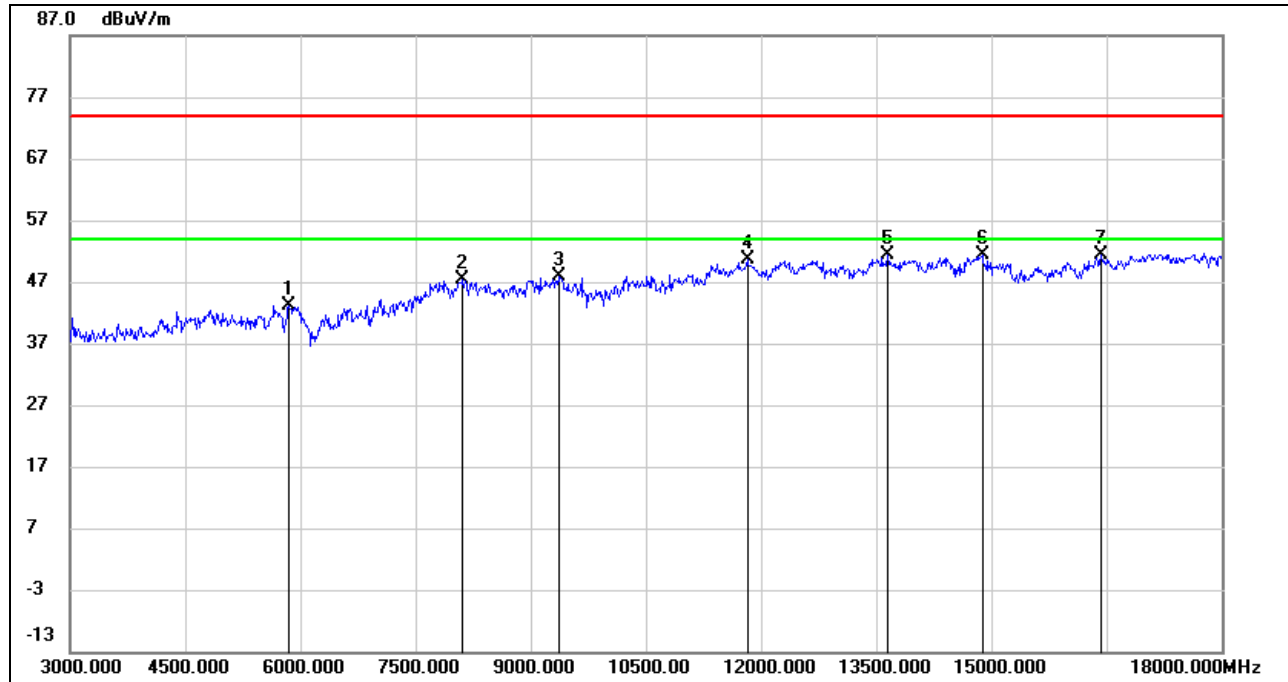

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	39.06	4.00	43.06	74.00	-30.94	peak
2	8115.000	37.35	10.13	47.48	74.00	-26.52	peak
3	9360.000	37.11	10.75	47.86	74.00	-26.14	peak
4	11820.000	35.39	15.29	50.68	74.00	-23.32	peak
5	13650.000	33.92	17.35	51.27	74.00	-22.73	peak
6	14880.000	33.83	17.51	51.34	74.00	-22.66	peak

Note: 1. Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor + High Pass Filter Loss Factor)

2. Margin = Result - Limit

3. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

4. Peak: Peak detector.

5. The high pass filter loss factor already add into the correct factor.

6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**END OF REPORT**