

# RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART E

<b>Test Standard</b>	<b>FCC Part 15.407</b>
<b>Product name</b>	<b>Digital Paper System</b>
<b>Brand Name</b>	<b>Avalue</b>
<b>Model No.</b>	<b>EL310XX (X= 0~9 or A~Z)</b>
<b>Test Result</b>	<b>Pass</b>
<b>Statements of Conformity</b>	<b>Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.</b>

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc.(Wugu Laboratory)

Approved by:



---

Kevin Tsai  
Deputy Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 11, 2021	Initial Issue	ALL	Mita Wu
01	January 21, 2021	See the following note Rev.(01)	P.8	Mita Wu

**Rev.(01)**

1. Added FCC ID of ancillary equipment.

## Table of contents

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
<b>1.1 EUT INFORMATION</b> .....	<b>4</b>
<b>1.2 EUT CHANNEL INFORMATION</b> .....	<b>5</b>
<b>1.3 ANTENNA INFORMATION</b> .....	<b>6</b>
<b>1.4 MEASUREMENT UNCERTAINTY</b> .....	<b>6</b>
<b>1.5 FACILITIES AND TEST LOCATION</b> .....	<b>7</b>
<b>1.6 INSTRUMENT CALIBRATION</b> .....	<b>7</b>
<b>1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT</b> .....	<b>8</b>
<b>1.8 TEST METHODOLOGY AND APPLIED STANDARDS</b> .....	<b>8</b>
<b>2. TEST SUMMARY</b> .....	<b>9</b>
<b>3. DESCRIPTION OF TEST MODES</b> .....	<b>10</b>
<b>3.1 THE EUT CHANNEL NUMBER OF OPERATING CONDITION</b> .....	<b>10</b>
<b>3.2 THE WORST MODE OF MEASUREMENT</b> .....	<b>11</b>
<b>3.3 EUT DUTY CYCLE</b> .....	<b>12</b>
<b>4. TEST RESULT</b> .....	<b>13</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSION</b> .....	<b>13</b>
<b>4.2 26DB BANDWIDTH, 6DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)</b> .....	<b>16</b>
<b>4.3 OUTPUT POWER MEASUREMENT</b> .....	<b>48</b>
<b>4.4 POWER SPECTRAL DENSITY</b> .....	<b>54</b>
<b>4.5 RADIATION BANDEDGE AND SPURIOUS EMISSION</b> .....	<b>86</b>
<b>4.6 FREQUENCY STABILITY</b> .....	<b>212</b>
<b>4.7 DYNAMIC FREQUENCY SELECTION</b> .....	<b>215</b>
<b>APPENDIX-A TEST PHOTO</b> .....	<b>A-1</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	

## 1. GENERAL INFORMATION

### 1.1 EUT INFORMATION

Applicant	AIMobile Co., Ltd. 6F., No. 166, Sec.4, Chengde Rd., Shilin Dist., Taipei City 11167 , Taiwan
Manufacturer	AIMobile Co., Ltd. 6F., No. 166, Sec.4, Chengde Rd., Shilin Dist., Taipei City 11167 , Taiwan
Equipment	Digital Paper System
Model No.	EL310XX (X= 0~9 or A~Z)
Model Discrepancy	All the above models are identical except for the designation of model numbers. The suffix of (X= 0~9 or A~Z) on model number is just for marketing purpose only
Trade Name	Avalue
Received Date	November 4, 2020
Date of Test	November 11 ~ December 8, 2020
Power Operation	1. Power from Host System. Rechargeable Li-Polymer Battery / LIS1633RDPCA Rating: 2000mAh, 7.4Wh 2. Power from Adapter.

**Remark:**

1. Disclaimer: Variant information between/among model numbers / trademarks is provided by the applicant, test results of this report are applicable to the sample EUT received of main test model name.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

## 1.2 EUT CHANNEL INFORMATION

Frequency Range	<b>UNII-1</b>	
	IEEE 802.11a	5180 ~ 5240 MHz
	IEEE 802.11n HT 20 MHz	5180 ~ 5240 MHz
	IEEE 802.11n HT 40 MHz	5190 ~ 5230 MHz
	IEEE 802.11ac VHT 80 MHz	5210 MHz
	<b>UNII-2a</b>	
	IEEE 802.11a	5260 ~ 5320 MHz
	IEEE 802.11n HT 20 MHz	5260 ~ 5320 MHz
	IEEE 802.11n HT 40 MHz	5270 ~ 5310 MHz
	IEEE 802.11ac VHT 80 MHz	5290 MHz
	<b>UNII-2c</b>	
	IEEE 802.11a	5500 ~ 5700 MHz
	IEEE 802.11n HT 20 MHz	5500 ~ 5700 MHz
	IEEE 802.11n HT 40 MHz	5510 ~ 5670 MHz
	IEEE 802.11ac VHT 80 MHz	5530 MHz
	<b>UNII-3</b>	
	IEEE 802.11a	5745 ~ 5825 MHz
	IEEE 802.11n HT 20 MHz	5745 ~ 5825 MHz
	IEEE 802.11n HT 40 MHz	5755 ~ 5795 MHz
	IEEE 802.11ac VHT 80 MHz	5775 MHz
Modulation Type	<ol style="list-style-type: none"> <li>1. IEEE 802.11a mode: OFDM</li> <li>2. IEEE 802.11n HT 20 MHz mode: OFDM</li> <li>3. IEEE 802.11n HT 40 MHz mode: OFDM</li> <li>4. IEEE 802.11ac VHT 80 MHz mode: OFDM</li> </ol>	

**Remark:**

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

### 1.3 ANTENNA INFORMATION

<b>Antenna Specification</b>	PIFA Antenna
<b>Antenna Gain</b>	Chain 0: 2.5 dBi Chain 1: 2.8 dBi  Power Directional Gain: 2.65 dBi
<b>Antenna connector</b>	IPEX

**Notes:**

1. Power Directional Gain =  $10 \cdot \text{LOG}(((10^{\text{Ant1}/10}) + 10^{\text{Ant2}/10})/2)$

### 1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

Report No.: T201104D06-RP4

## 1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Lance Chen	-
Radiation	Ray Li, Jerry Chang	-
RF Conducted	Rick Lee	-

**Remark:** The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.6 INSTRUMENT CALIBRATION

3M 966 Chamber Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Sunol Sciences	JB3	A030105	07/24/2020	07/23/2021
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/25/2020	02/24/2021
Coaxial Cable	EMCI	EMC105	190914+32710 9/4	09/19/2020	09/18/2021
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/15/2020	01/14/2021
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	09/30/2020	09/29/2021
High Pass Filters	MICRO TRONICS	HPM13195	003	02/25/2020	02/24/2021
Horn Antenna	ETS LINDGREN	3116	00026370	12/18/2019	12/17/2020
Loop Ant	COM-POWER	AL-130	121051	03/27/2020	03/26/2021
Pre-Amplifier	EMEC	EM330	060609	02/25/2020	02/24/2021
Pre-Amplifier	HP	8449B	3008A00965	02/25/2020	02/24/2021
Pre-Amplifier	MITEQ	AMF-6F-1800 4000-37-8P	985646	09/02/2020	09/01/2021
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	07/24/2020	07/23/2021
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

RF Conducted Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Coaxial Cable	Woken	WC12	CC003	06/29/2020	06/28/2021
Coaxial Cable	Woken	WC12	CC001	06/29/2020	06/28/2021
Signal Analyzer	R&S	FSV 40	101073	09/17/2020	09/16/2021
Power Meter	Anritsu	ML2495A	1149001	N.C.R	N.C.R
Power Seneor	Anritsu	MA2491A	030982	N.C.R	N.C.R
Software	N/A				

AC line Conduction Test Room					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
CABLE	EMCI	CFD300-NL	CERF	06/29/2020	06/28/2021
EMI Test Receiver	R&S	ESCI	100064	07/17/2020	07/16/2021
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2020	02/12/2021
Software	EZ-EMC(CCS-3A1-CE)				

**Remark:**

1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R. = No Calibration Required.

## 1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	Adapter	SAMSUNG	ETA-U90JWS	N/A	N/A
2	AP	ASUS	RT-AX88U	N/A	MSQ-RTAXHP00

## 1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.407, KDB 789033 D02, KDB 905462 D02.



## 2. TEST SUMMARY

FCC Standard Sec.	Chapter	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207	4.1	AC Conducted Emission	Pass
15.403(i)	4.2	26dB Bandwidth	Pass
15.407(e)	4.2	6dB Bandwidth	Pass
2.1049	4.2	Occupied Bandwidth (99%)	Pass
15.407(a)	4.3	Output Power Measurement	Pass
15.407(a)	4.4	Power Spectral Density	Pass
15.407(b)	4.5	Radiation Band Edge	Pass
15.407(b)	4.5	Radiation Spurious Emission	Pass
15.407(g)	4.6	Frequency Stability	Pass
15.407(h)	4.7	Dynamic Frequency Selection	Pass

Report No.: T201104D06-RP4

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE EUT CHANNEL NUMBER OF OPERATING CONDITION

<p>Operation mode</p>	<p>1. IEEE 802.11a mode: 6Mbps 2. IEEE 802.11n HT 20 MHz mode: MCS8 3. IEEE 802.11n HT 40 MHz mode: MCS8 4. IEEE 802.11ac VHT 80 MHz mode: MCS8</p>																																							
<p>Operating Frequency</p>		<table border="1"> <thead> <tr> <th data-bbox="726 786 1056 831">Mode</th> <th data-bbox="1056 786 1401 831">Frequency Range (MHz)</th> </tr> </thead> <tbody> <tr> <td data-bbox="726 831 1056 864" rowspan="4">U-NII-1</td> <td data-bbox="1056 831 1401 864">IEEE 802.11a</td> <td data-bbox="1056 864 1401 887">5180, 5220, 5240</td> </tr> <tr> <td data-bbox="1056 887 1401 920">IEEE 802.11n HT 20 MHz</td> <td data-bbox="1056 920 1401 943">5180, 5220, 5240</td> </tr> <tr> <td data-bbox="1056 943 1401 976">IEEE 802.11n HT 40 MHz</td> <td data-bbox="1056 976 1401 999">5190, 5230</td> </tr> <tr> <td data-bbox="1056 999 1401 1032">IEEE 802.11ac VHT 80 MHz</td> <td data-bbox="1056 1032 1401 1055">5210</td> </tr> <tr> <td data-bbox="726 1032 1056 1066" rowspan="4">U-NII-2a</td> <td data-bbox="1056 1032 1401 1066">IEEE 802.11a</td> <td data-bbox="1056 1066 1401 1088">5260, 5280, 5320</td> </tr> <tr> <td data-bbox="1056 1088 1401 1122">IEEE 802.11n HT 20 MHz</td> <td data-bbox="1056 1122 1401 1144">5260, 5280, 5320</td> </tr> <tr> <td data-bbox="1056 1144 1401 1178">IEEE 802.11n HT 40 MHz</td> <td data-bbox="1056 1178 1401 1200">5270, 5310</td> </tr> <tr> <td data-bbox="1056 1200 1401 1234">IEEE 802.11ac VHT 80 MHz</td> <td data-bbox="1056 1234 1401 1256">5290</td> </tr> <tr> <td data-bbox="726 1234 1056 1267" rowspan="4">U-NII-2c</td> <td data-bbox="1056 1234 1401 1267">IEEE 802.11a</td> <td data-bbox="1056 1267 1401 1290">5500, 5580, 5700</td> </tr> <tr> <td data-bbox="1056 1290 1401 1323">IEEE 802.11n HT 20 MHz</td> <td data-bbox="1056 1323 1401 1346">5500, 5580, 5700</td> </tr> <tr> <td data-bbox="1056 1346 1401 1379">IEEE 802.11n HT 40 MHz</td> <td data-bbox="1056 1379 1401 1402">5510, 5550, 5670</td> </tr> <tr> <td data-bbox="1056 1402 1401 1435">IEEE 802.11ac VHT 80 MHz</td> <td data-bbox="1056 1435 1401 1458">5530</td> </tr> <tr> <td data-bbox="726 1435 1056 1469" rowspan="4">U-NII-3</td> <td data-bbox="1056 1435 1401 1469">IEEE 802.11a</td> <td data-bbox="1056 1469 1401 1491">5745, 5785, 5825</td> </tr> <tr> <td data-bbox="1056 1491 1401 1525">IEEE 802.11n HT 20 MHz</td> <td data-bbox="1056 1525 1401 1547">5745, 5785, 5825</td> </tr> <tr> <td data-bbox="1056 1547 1401 1581">IEEE 802.11n HT 40 MHz</td> <td data-bbox="1056 1581 1401 1603">5755, 5795</td> </tr> <tr> <td data-bbox="1056 1603 1401 1637">IEEE 802.11ac VHT 80 MHz</td> <td data-bbox="1056 1637 1401 1659">5775</td> </tr> </tbody> </table>	Mode	Frequency Range (MHz)	U-NII-1	IEEE 802.11a	5180, 5220, 5240	IEEE 802.11n HT 20 MHz	5180, 5220, 5240	IEEE 802.11n HT 40 MHz	5190, 5230	IEEE 802.11ac VHT 80 MHz	5210	U-NII-2a	IEEE 802.11a	5260, 5280, 5320	IEEE 802.11n HT 20 MHz	5260, 5280, 5320	IEEE 802.11n HT 40 MHz	5270, 5310	IEEE 802.11ac VHT 80 MHz	5290	U-NII-2c	IEEE 802.11a	5500, 5580, 5700	IEEE 802.11n HT 20 MHz	5500, 5580, 5700	IEEE 802.11n HT 40 MHz	5510, 5550, 5670	IEEE 802.11ac VHT 80 MHz	5530	U-NII-3	IEEE 802.11a	5745, 5785, 5825	IEEE 802.11n HT 20 MHz	5745, 5785, 5825	IEEE 802.11n HT 40 MHz	5755, 5795	IEEE 802.11ac VHT 80 MHz	5775
Mode	Frequency Range (MHz)																																							
U-NII-1	IEEE 802.11a	5180, 5220, 5240																																						
	IEEE 802.11n HT 20 MHz	5180, 5220, 5240																																						
	IEEE 802.11n HT 40 MHz	5190, 5230																																						
	IEEE 802.11ac VHT 80 MHz	5210																																						
U-NII-2a	IEEE 802.11a	5260, 5280, 5320																																						
	IEEE 802.11n HT 20 MHz	5260, 5280, 5320																																						
	IEEE 802.11n HT 40 MHz	5270, 5310																																						
	IEEE 802.11ac VHT 80 MHz	5290																																						
U-NII-2c	IEEE 802.11a	5500, 5580, 5700																																						
	IEEE 802.11n HT 20 MHz	5500, 5580, 5700																																						
	IEEE 802.11n HT 40 MHz	5510, 5550, 5670																																						
	IEEE 802.11ac VHT 80 MHz	5530																																						
U-NII-3	IEEE 802.11a	5745, 5785, 5825																																						
	IEEE 802.11n HT 20 MHz	5745, 5785, 5825																																						
	IEEE 802.11n HT 40 MHz	5755, 5795																																						
	IEEE 802.11ac VHT 80 MHz	5775																																						

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.
2. The mode IEEE 802.11ac VHT20 and VHT40 are only different in control messages with IEEE 802.11n 20 MHz and HT40, and have same power setting. Therefore, the highest power(IEEE 802.11n 20 MHz and HT40) were test conducted and radiated measurement and recorded in this report.

### 3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by Adapter
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

Report No.: T201104D06-RP4

### 3.3 EUT DUTY CYCLE


Temperature: 24.9°C

Humidity: 58% RH

Tested by: Rick Lee

Test date: December 8, 2020

Duty Cycle				
Configuration	Duty Cycle (%)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11a	100%	0.00	N/A	0.01
802.11n HT20	100%	0.00	N/A	0.01
802.11n HT40	100%	0.00	N/A	0.01
802.11ac VHT80	100%	0.00	N/A	0.01

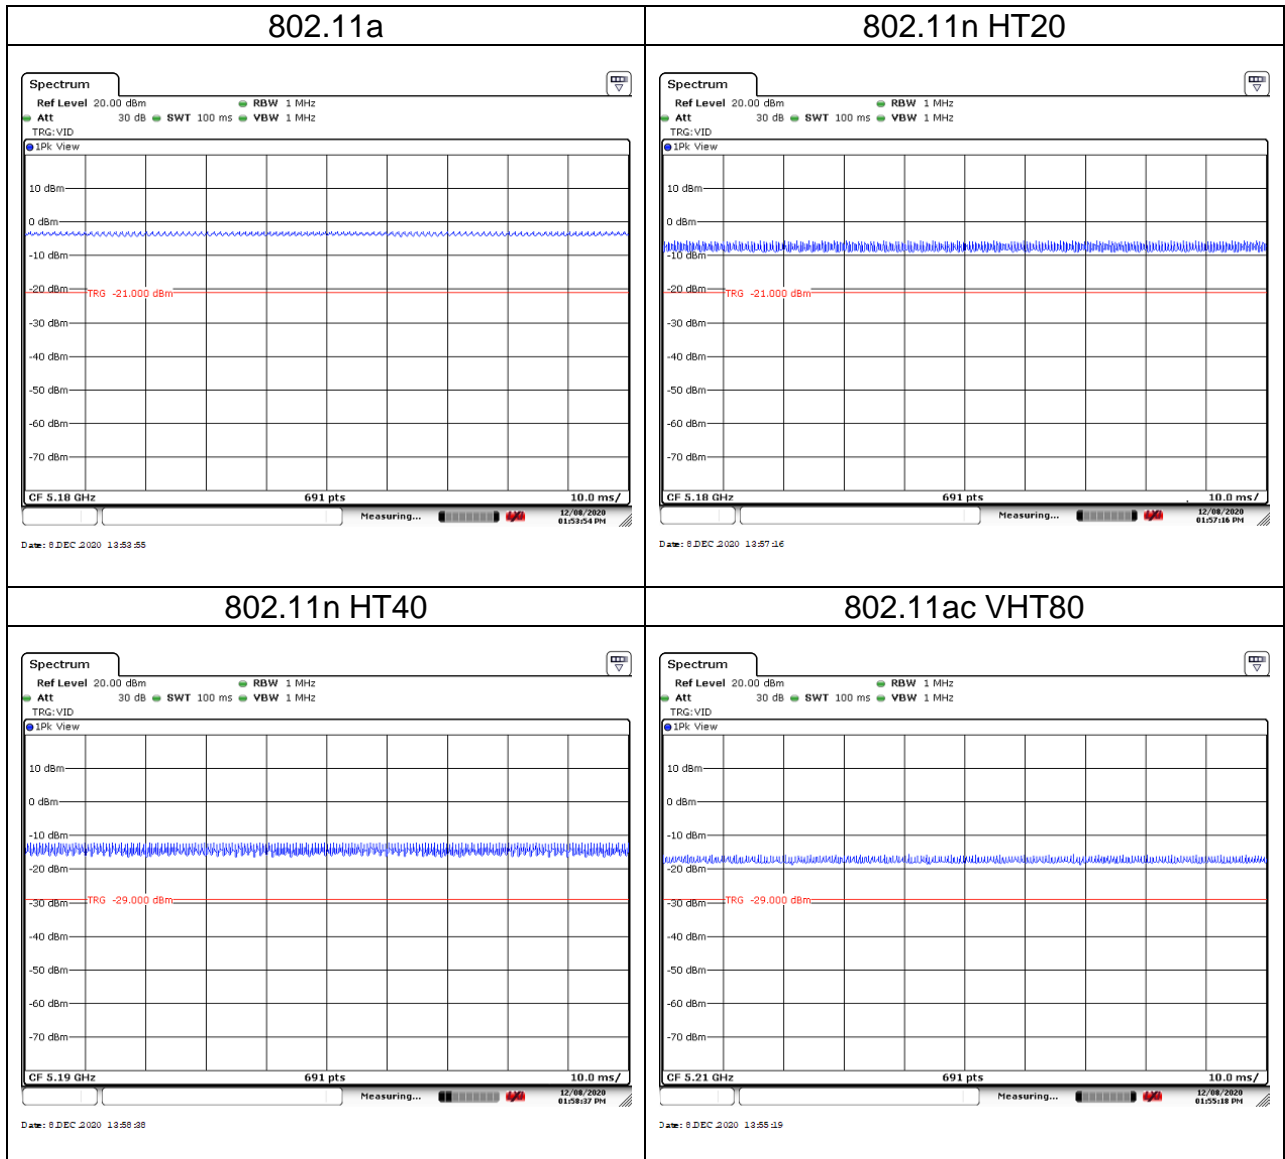

Report No.: T201104D06-RP4

## 4. TEST RESULT

### 4.1 AC POWER LINE CONDUCTED EMISSION

#### 4.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


\* Decreases with the logarithm of the frequency.

#### 4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

#### 4.1.3 Test Setup

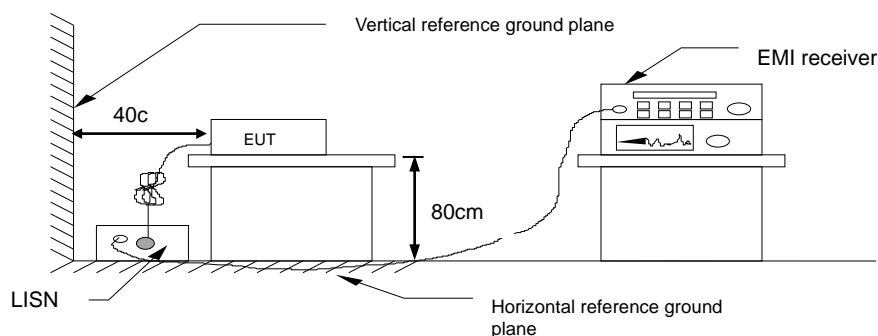


#### 4.1.4 Test Result

Pass.

Report No.: T201104D06-RP4

### Test Data


Test Mode:	Mode 1	Temp/Hum	22.4(°C)/ 57%RH
Phase:	Line	Test Date	December 7, 2020
Test Voltage:	120Vac, 60Hz	Test Engineer	Rick Lee

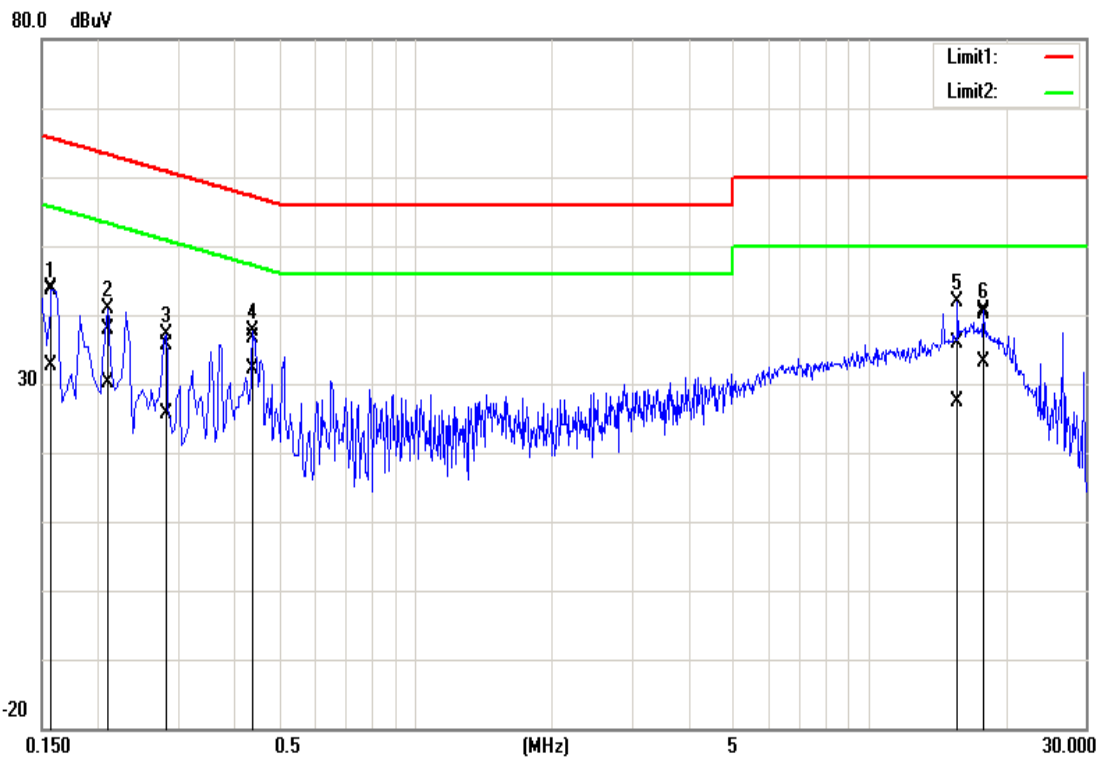

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1580	33.77	22.32	10.21	43.98	32.53	65.57	55.57	-21.59	-23.04	Pass
0.2100	27.70	19.83	10.21	37.91	30.04	63.21	53.21	-25.30	-23.17	Pass
0.2820	25.33	15.50	10.21	35.54	25.71	60.76	50.76	-25.22	-25.05	Pass
0.4380	26.47	21.84	10.22	36.69	32.06	57.10	47.10	-20.41	-15.04	Pass
15.7100	25.56	16.91	10.39	35.95	27.30	60.00	50.00	-24.05	-22.70	Pass
17.8860	29.70	22.80	10.39	40.09	33.19	60.00	50.00	-19.91	-16.81	Pass

Report No.: T201104D06-RP4

Test Mode:	Mode 1	Temp/Hum	22.4(°C)/ 57%RH
Phase:	Line	Test Date	December 7, 2020
Test Voltage:	120Vac, 60Hz	Test Engineer	Rick Lee

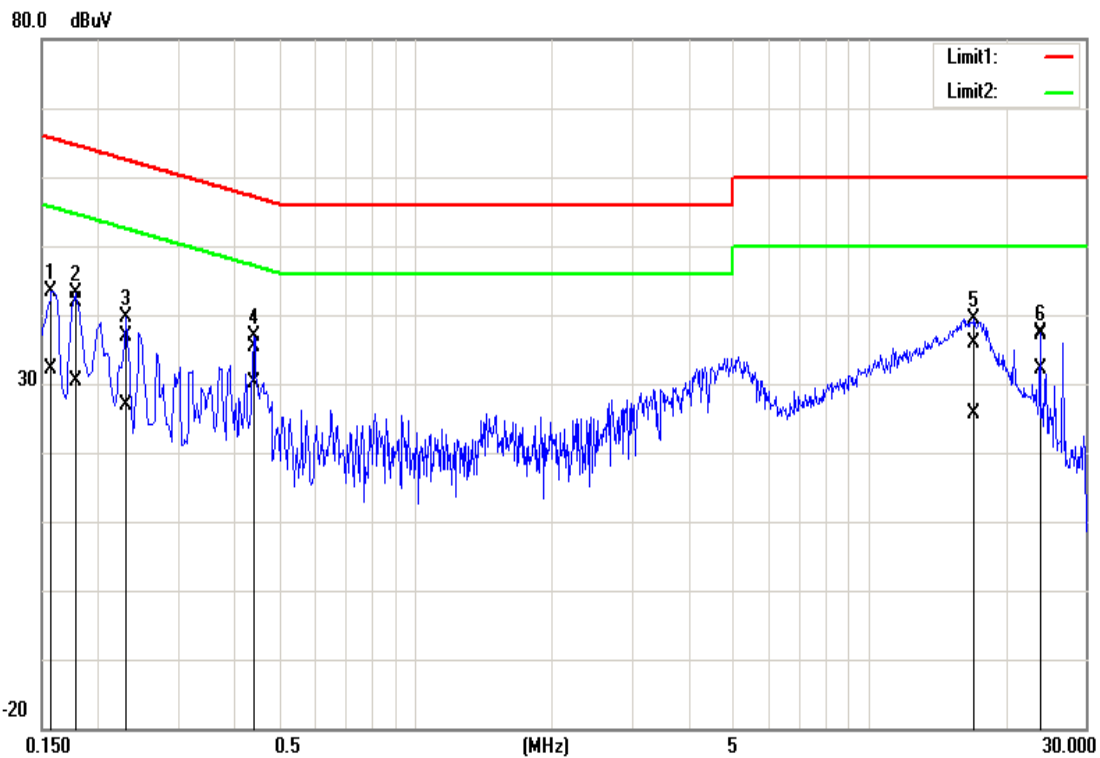

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1580	33.22	21.97	10.18	43.40	32.15	65.57	55.57	-22.17	-23.42	Pass
0.1780	31.64	20.29	10.19	41.83	30.48	64.58	54.58	-22.75	-24.10	Pass
0.2300	26.66	16.71	10.19	36.85	26.90	62.45	52.45	-25.60	-25.55	Pass
0.4420	25.22	20.01	10.19	35.41	30.20	57.02	47.02	-21.61	-16.82	Pass
17.0620	25.50	15.32	10.40	35.90	25.72	60.00	50.00	-24.10	-24.28	Pass
23.8500	26.66	21.71	10.51	37.17	32.22	60.00	50.00	-22.83	-17.78	Pass

## 4.2 26dB BANDWIDTH, 6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

### 4.2.1 Test Limit

**26 dB Bandwidth** : For reporting purposes only.

**6 dB Bandwidth** : Least 500kHz.

**Occupied Bandwidth(99%)** : For reporting purposes only.

### 4.2.2 Test Procedure

#### 26dB

1. This measurement setting are specified in section D of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW: approximately 1% of the emission bandwidth.
3. Set the VBW>RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26dB down from the peak of the emission. Compare this with the RBW setting of the analyser. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.


#### 6dB

1. This measurement setting are specified in section D of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = 100 kHz.
3. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



**99%**

1. This measurement setting are specified in section D of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set center frequency to the nominal EUT channel center frequency.
3. Set span = 1.5 times to 5.0 times the OBW.
4. Set RBW = 1 % to 5% of the OBW.
5. Set VBW  $\geq 3 \times$ RBW

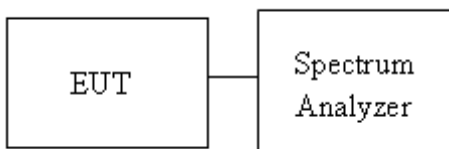**4.2.3 Test Setup**

Report No.: T201104D06-RP4

#### 4.2.4 Test Result

##### Chain 0:

Temperature: 24.1°C

Test date: November 17, 2020

Humidity: 54.2% RH

Tested by: Rick Lee

##### Chain 1:

Temperature: 25.9°C

Test date: November 24, 2020

Humidity: 50% RH

Tested by: Rick Lee

UNII-1 5150-5250 MHz					
Test mode: IEEE 802.11a mode					
Channel	Frequency (MHz)	Chain 0 OBW (99%) (MHz)	Chain 1 OBW (99%) (MHz)	Chain 0 26dB BW (MHz)	Chain 1 26dB BW (MHz)
Low	5180	-	-	19.88	19.74
Mid	5220	-	-	19.93	19.60
High	5240	-	-	19.70	19.68
Test mode: IEEE 802.11n HT20 mode					
Channel	Frequency (MHz)	Chain 0 OBW (99%) (MHz)	Chain 1 OBW (99%) (MHz)	Chain 0 26dB BW (MHz)	Chain 1 26dB BW (MHz)
Low	5180	-	-	19.95	19.98
Mid	5220	-	-	20.10	20.05
High	5240	-	-	19.72	20.14
Test mode: IEEE 802.11n HT40 mode					
Channel	Frequency (MHz)	Chain 0 OBW (99%) (MHz)	Chain 1 OBW (99%) (MHz)	Chain 0 26dB BW (MHz)	Chain 1 26dB BW (MHz)
Low	5190	-	-	40.32	39.95
High	5230	-	-	40.48	40.080
Test mode: IEEE 802.11ac VHT80 mode					
Channel	Frequency (MHz)	Chain 0 OBW (99%) (MHz)	Chain 1 OBW (99%) (MHz)	Chain 0 26dB BW (MHz)	Chain 1 26dB BW (MHz)
Mid	5210	-	-	81.69	81.08

Report No.: T201104D06-RP4

**Chain 0:**

**Temperature:** 24.1°C

**Test date:** November 17, 2020

**Humidity:** 54.2% RH

**Tested by:** Rick Lee

**Chain 1:**

**Temperature:** 25.9°C

**Test date:** November 24, 2020

**Humidity:** 50% RH

**Tested by:** Rick Lee

<b>UNII-2a 5250-5350 MHz</b>					
<b>Test mode: IEEE 802.11a mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW (99%) (MHz)</b>	<b>Chain 1 OBW (99%) (MHz)</b>	<b>Chain 0 26dB BW (MHz)</b>	<b>Chain 1 26dB BW (MHz)</b>
Low	5260	-	-	19.80	19.73
Mid	5280	-	-	19.12	19.69
High	5320	-	-	19.82	19.70
<b>Test mode: IEEE 802.11n HT20 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW (99%) (MHz)</b>	<b>Chain 1 OBW (99%) (MHz)</b>	<b>Chain 0 26dB BW (MHz)</b>	<b>Chain 1 26dB BW (MHz)</b>
Low	5260	-	-	20.02	20.25
Mid	5280	-	-	19.40	20.01
High	5320	-	-	19.96	19.92
<b>Test mode: IEEE 802.11n HT40 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW (99%) (MHz)</b>	<b>Chain 1 OBW (99%) (MHz)</b>	<b>Chain 0 26dB BW (MHz)</b>	<b>Chain 1 26dB BW (MHz)</b>
Low	5270	-	-	40.21	39.61
High	5310	-	-	40.46	39.75
<b>Test mode: IEEE 802.11ac VHT80 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW (99%) (MHz)</b>	<b>Chain 1 OBW (99%) (MHz)</b>	<b>Chain 0 26dB BW (MHz)</b>	<b>Chain 1 26dB BW (MHz)</b>
Mid	5290	-	-	81.81	81.40

Report No.: T201104D06-RP4

**Chain 0:**

**Temperature:** 24.1°C

**Test date:** November 17, 2020

**Humidity:** 54.2% RH

**Tested by:** Rick Lee

**Chain 1:**

**Temperature:** 25.9°C

**Test date:** November 24, 2020

**Humidity:** 50% RH

**Tested by:** Rick Lee

<b>UNII-2c 5475-5725 MHz</b>					
<b>Test mode: IEEE 802.11a mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW (99%) (MHz)</b>	<b>Chain 1 OBW (99%) (MHz)</b>	<b>Chain 0 26dB BW (MHz)</b>	<b>Chain 1 26dB BW (MHz)</b>
Low	5500	-	-	19.60	19.88
Mid	5580	-	-	19.67	19.76
High	5700	-	-	19.62	19.61
<b>Test mode: IEEE 802.11n HT20 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW (99%) (MHz)</b>	<b>Chain 1 OBW (99%) (MHz)</b>	<b>Chain 0 26dB BW (MHz)</b>	<b>Chain 1 26dB BW (MHz)</b>
Low	5500	-	-	20.06	20.15
Mid	5580	-	-	19.95	20.13
High	5700	-	-	20.00	20.04
<b>Test mode: IEEE 802.11n HT40 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW (99%) (MHz)</b>	<b>Chain 1 OBW(99%) (MHz)</b>	<b>Chain 0 26dB BW (MHz)</b>	<b>Chain 1 26dB BW (MHz)</b>
Low	5510	-	-	40.48	39.78
Mid	5550	-	-	40.38	40.04
High	5670	-	-	40.28	40.16
<b>Test mode: IEEE 802.11ac VHT80 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW(99%) (MHz)</b>	<b>Chain 1 OBW(99%) (MHz)</b>	<b>Chain 0 26dB BW (MHz)</b>	<b>Chain 1 26dB BW (MHz)</b>
Low	5530	-	-	81.06	81.41
High	5610	-	-	82.07	81.34

Report No.: T201104D06-RP4

**Chain 0:**

**Temperature:** 24.1°C

**Test date:** November 17, 2020

**Humidity:** 54.2% RH

**Tested by:** Rick Lee

**Chain 1:**

**Temperature:** 25.9°C

**Test date:** November 24, 2020


**Humidity:** 50% RH

**Tested by:** Rick Lee


<b>UNII-3 5725-5825MHz</b>					
<b>Test mode: IEEE 802.11a mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW(99%) (MHz)</b>	<b>Chain 1 OBW(99%) (MHz)</b>	<b>Chain 0 6dB BW (MHz)</b>	<b>Chain 1 6dB BW (MHz)</b>
Low	5745	-	-	16.59	16.58
Mid	5785	-	-	16.60	16.60
High	5825	-	-	16.60	16.60
<b>Test mode: IEEE 802.11n HT20 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW(99%) (MHz)</b>	<b>Chain 1 OBW(99%) (MHz)</b>	<b>Chain 0 6dB BW (MHz)</b>	<b>Chain 1 6dB BW (MHz)</b>
Low	5745	-	-	17.75	17.73
Mid	5785	-	-	17.72	17.71
High	5825	-	-	17.79	17.71
<b>Test mode: IEEE 802.11n HT40 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW(99%) (MHz)</b>	<b>Chain 1 OBW(99%) (MHz)</b>	<b>Chain 0 6dB BW (MHz)</b>	<b>Chain 1 6dB BW (MHz)</b>
Low	5755	-	-	36.47	36.43
High	5795	-	-	36.48	36.45
<b>Test mode: IEEE 802.11ac VHT80 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 OBW(99%) (MHz)</b>	<b>Chain 1 OBW(99%) (MHz)</b>	<b>Chain 0 6dB BW (MHz)</b>	<b>Chain 1 6dB BW (MHz)</b>
Mid	5775	-	-	76.62	76.59

Report No.: T201104D06-RP4


## Test Data (26dB BANDWIDTH)

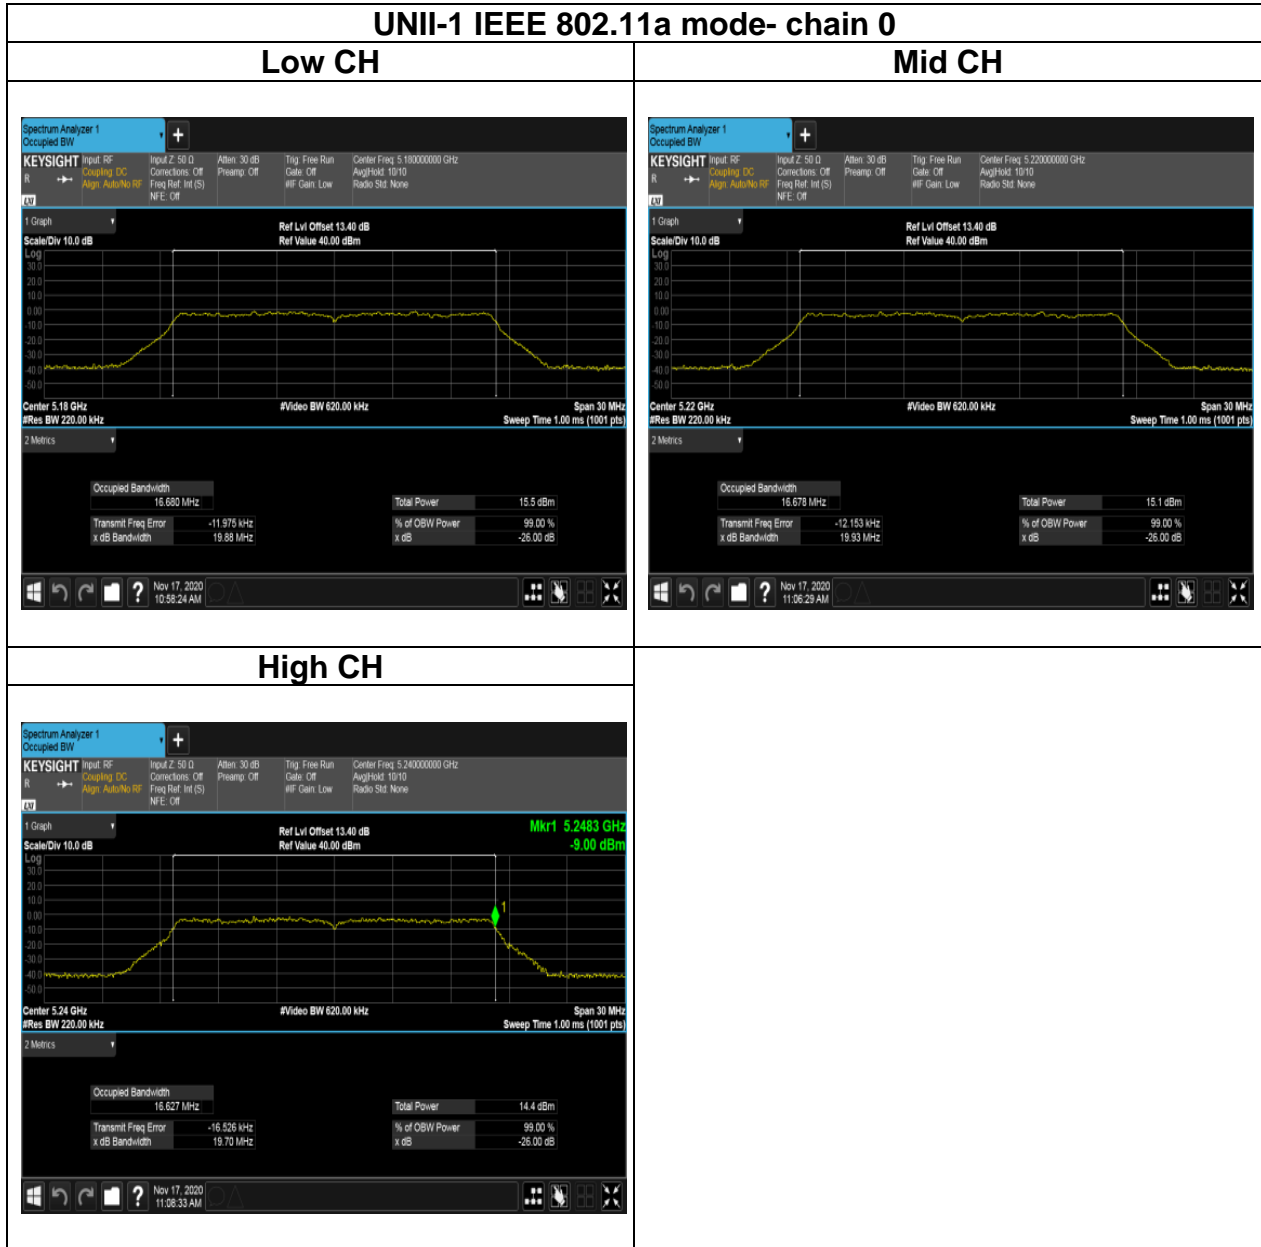

Report No.: T201104D06-RP4

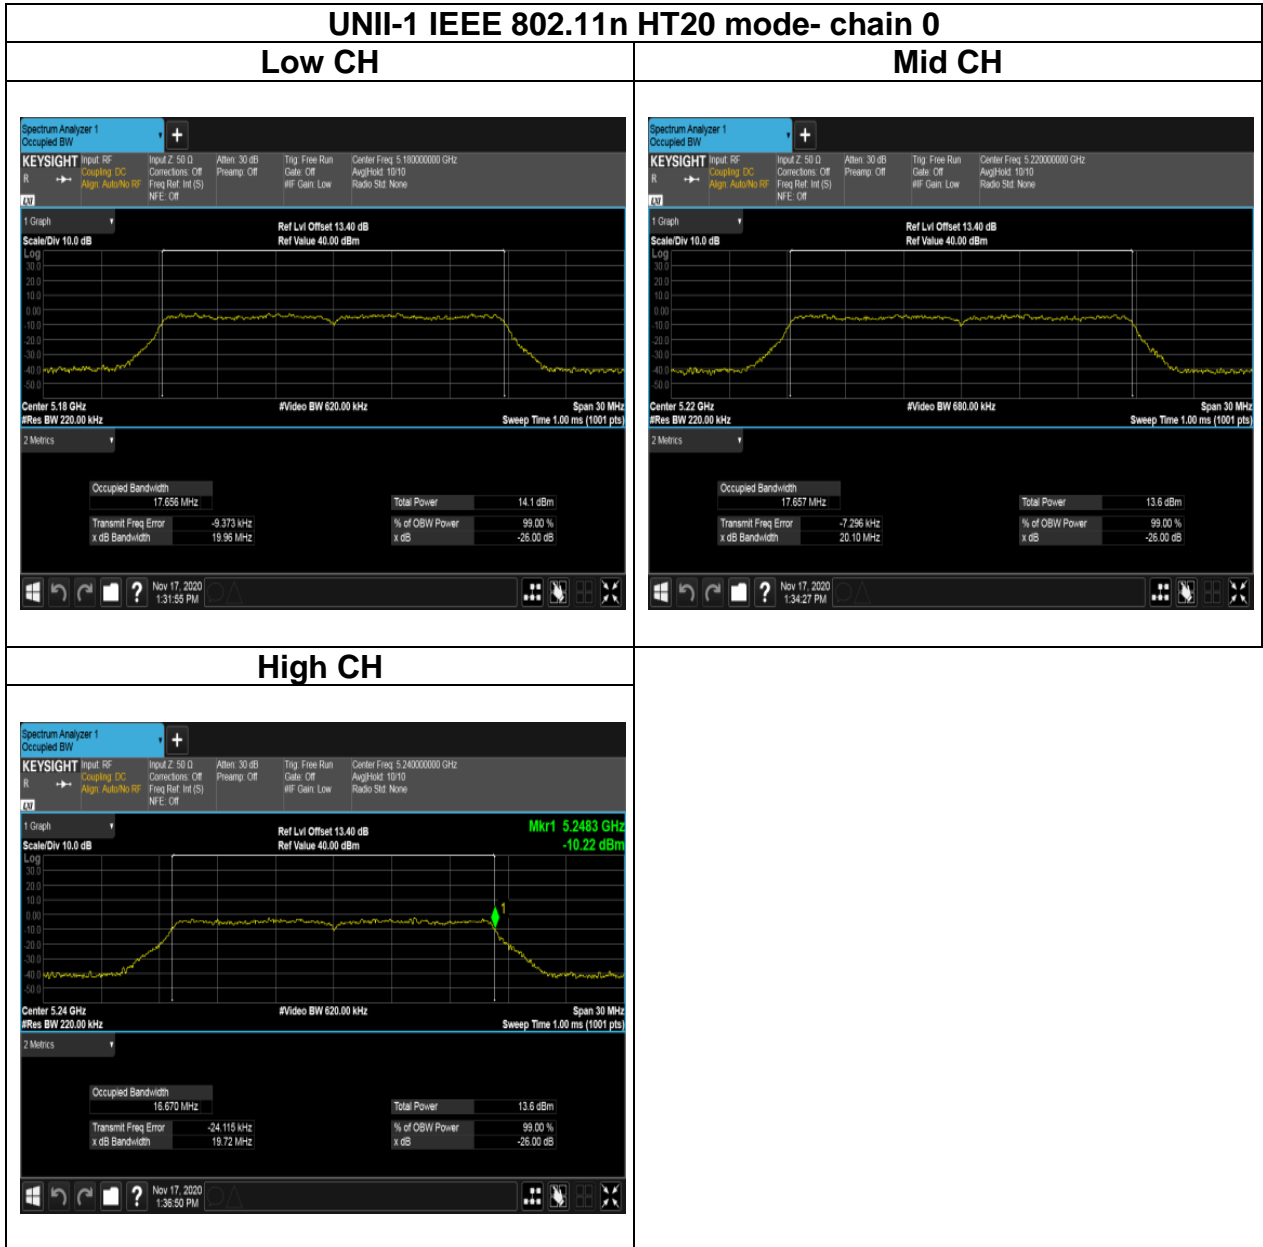


Report No.: T201104D06-RP4

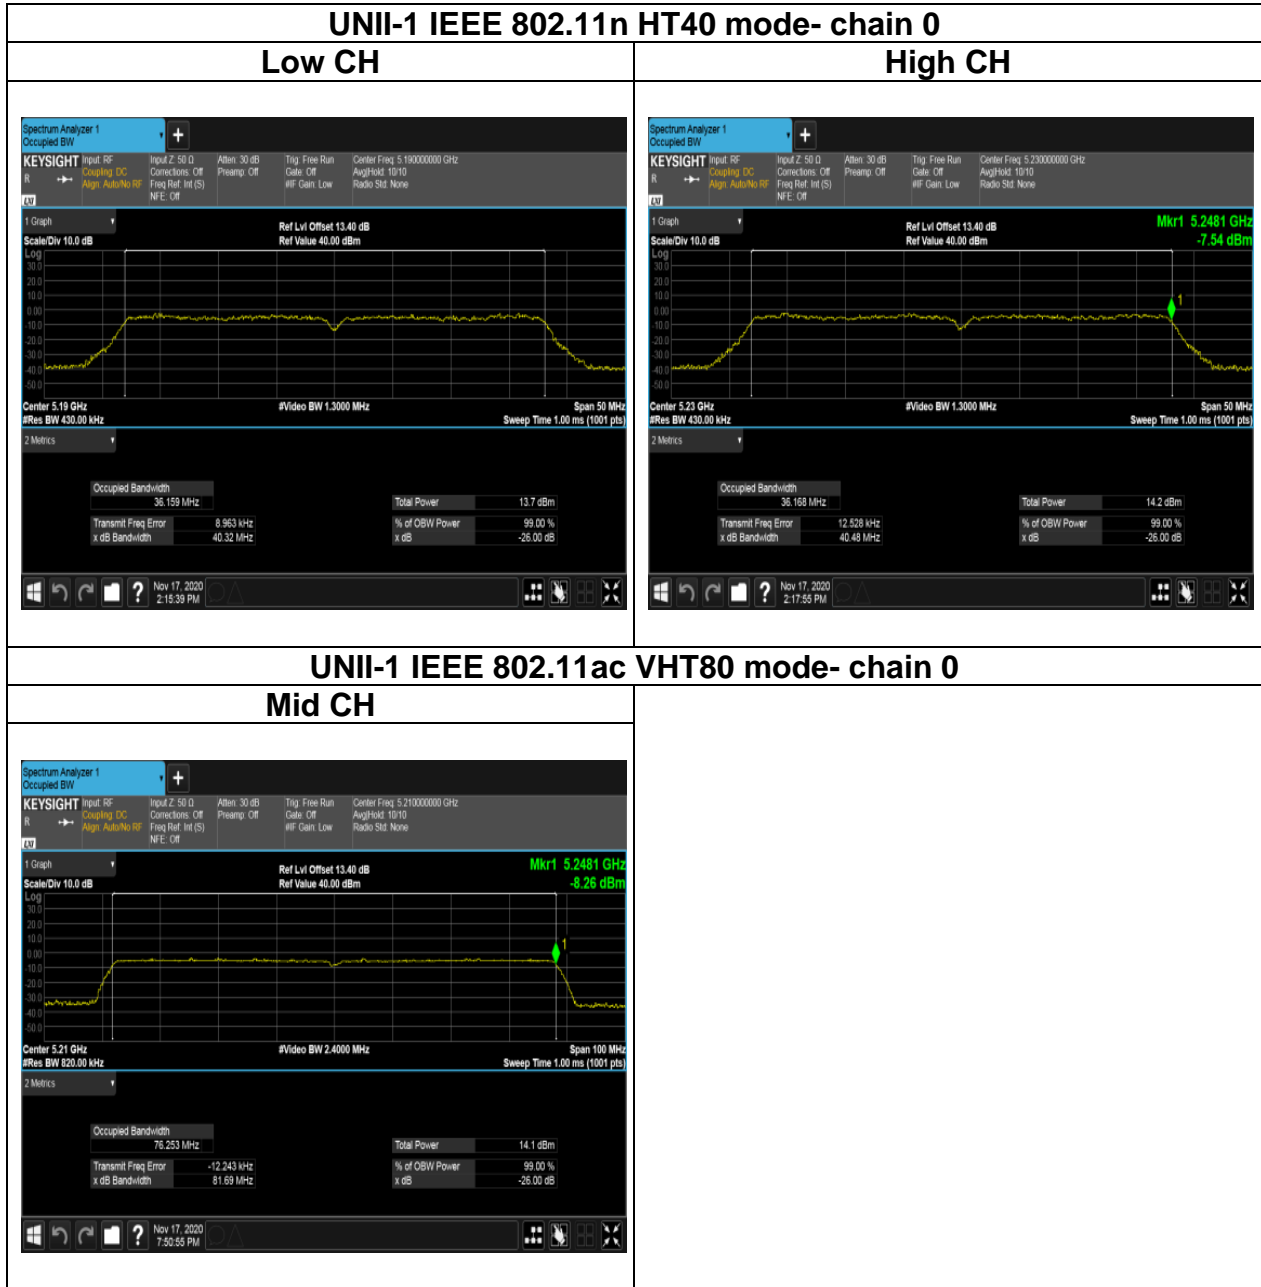




Report No.: T201104D06-RP4


## Test Data (26dB BANDWIDTH)

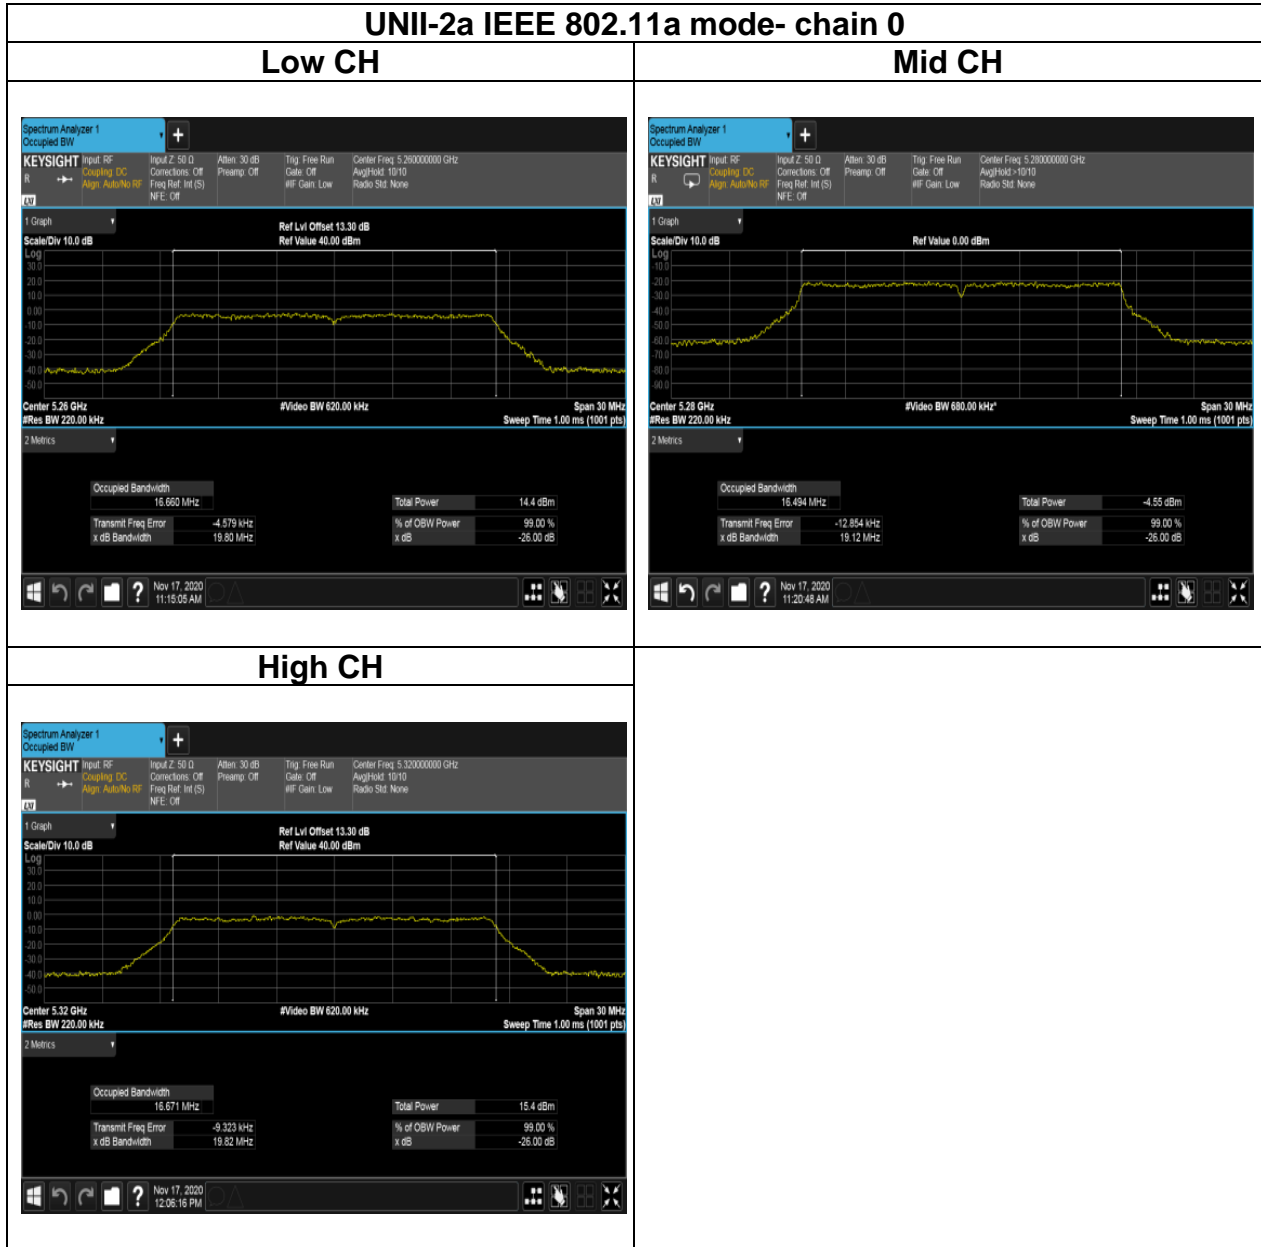

Report No.: T201104D06-RP4

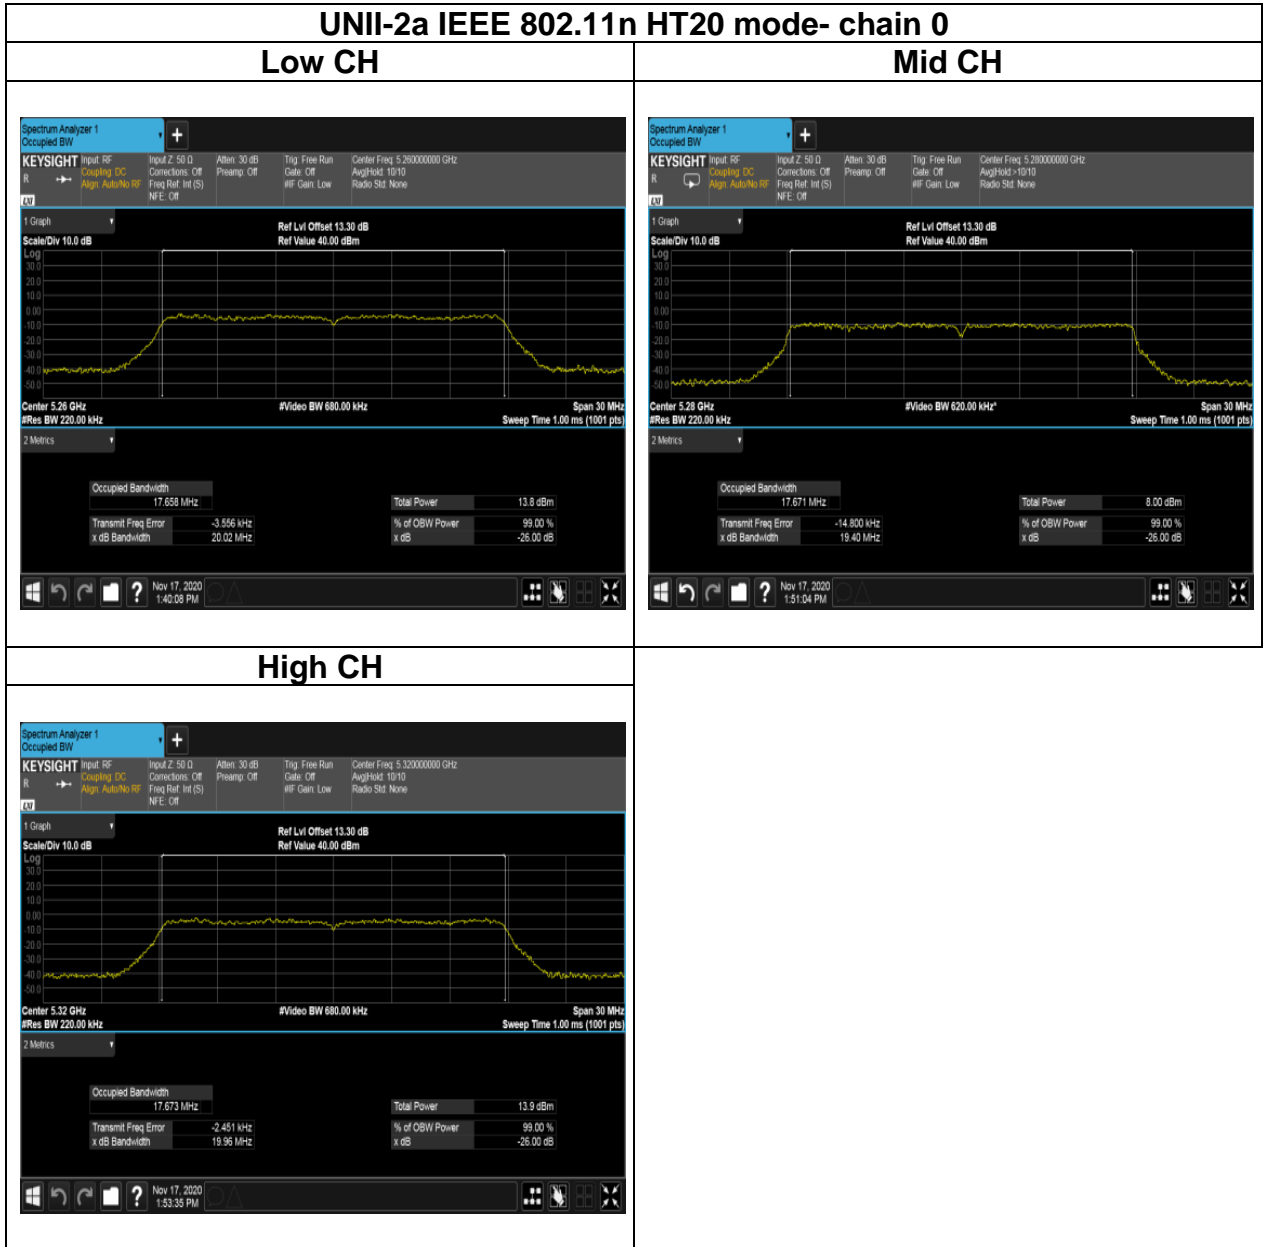


Report No.: T201104D06-RP4

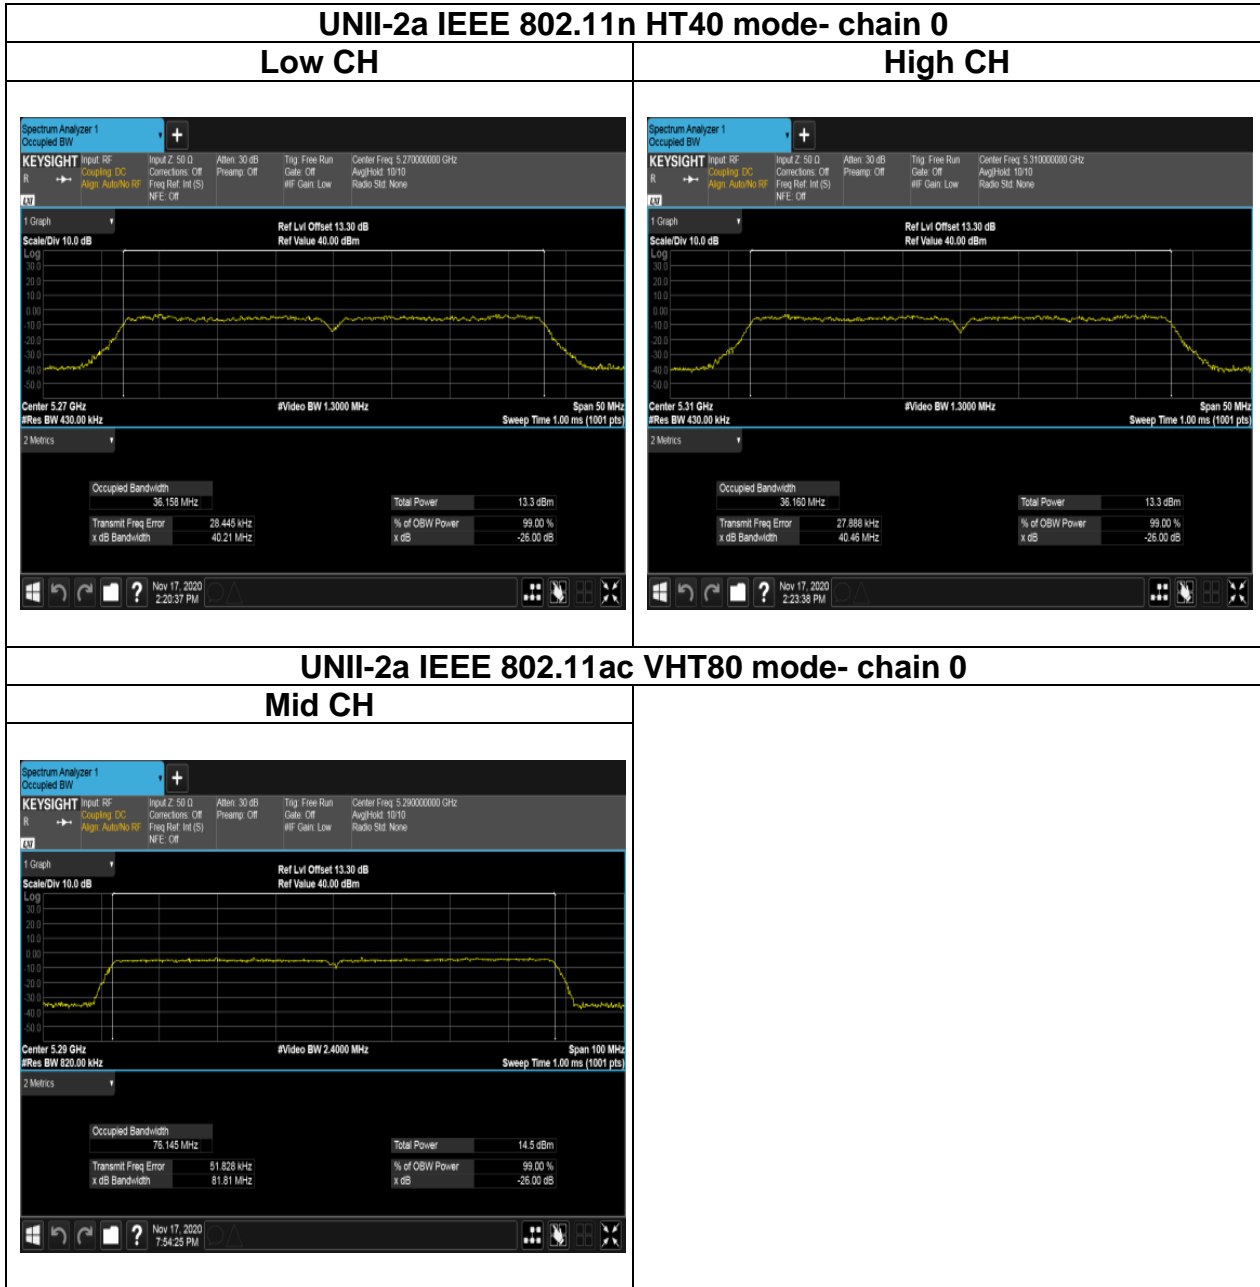


Report No.: T201104D06-RP4


## Test Data (26dB BANDWIDTH)

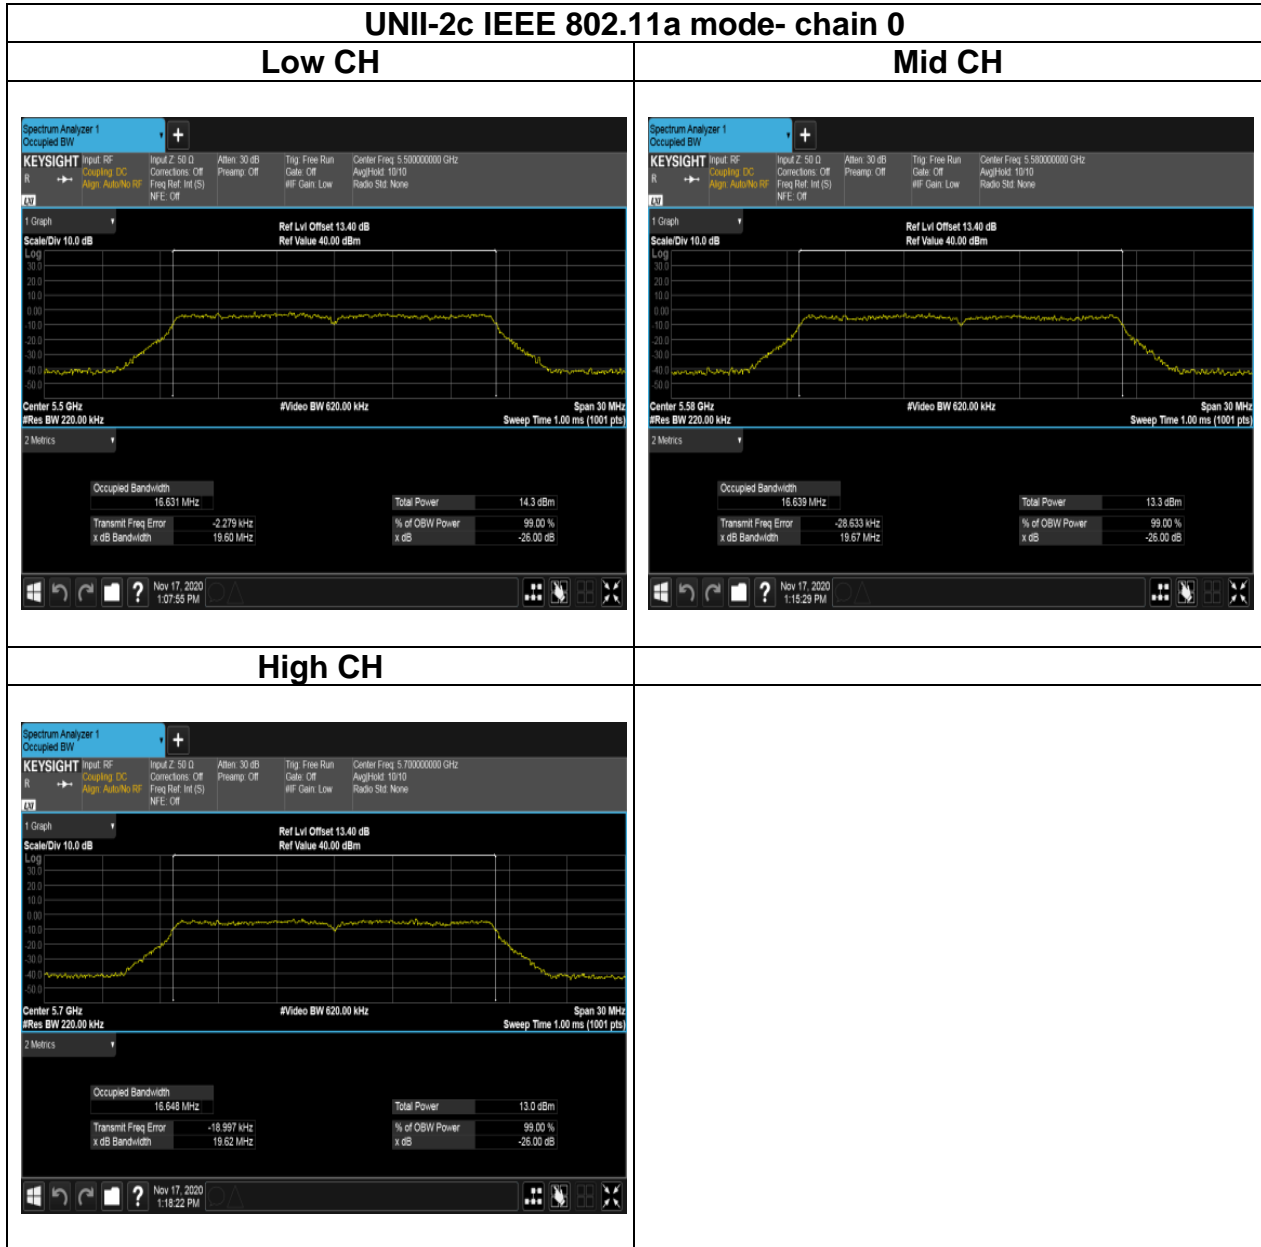


Report No.: T201104D06-RP4

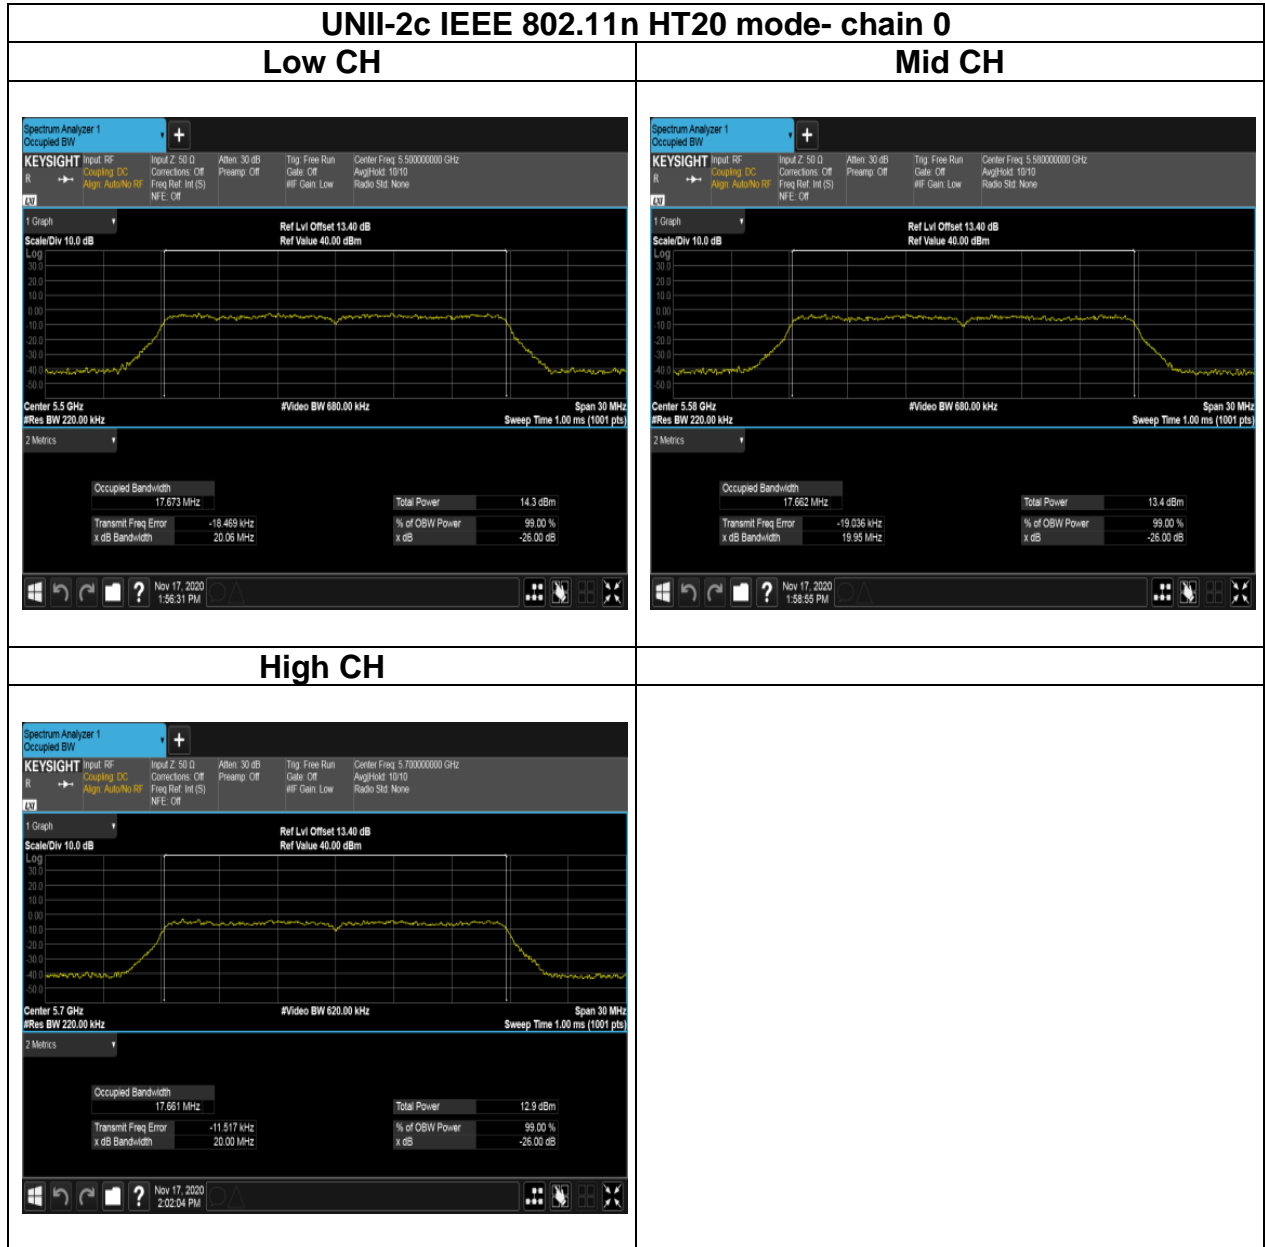

Report No.: T201104D06-RP4

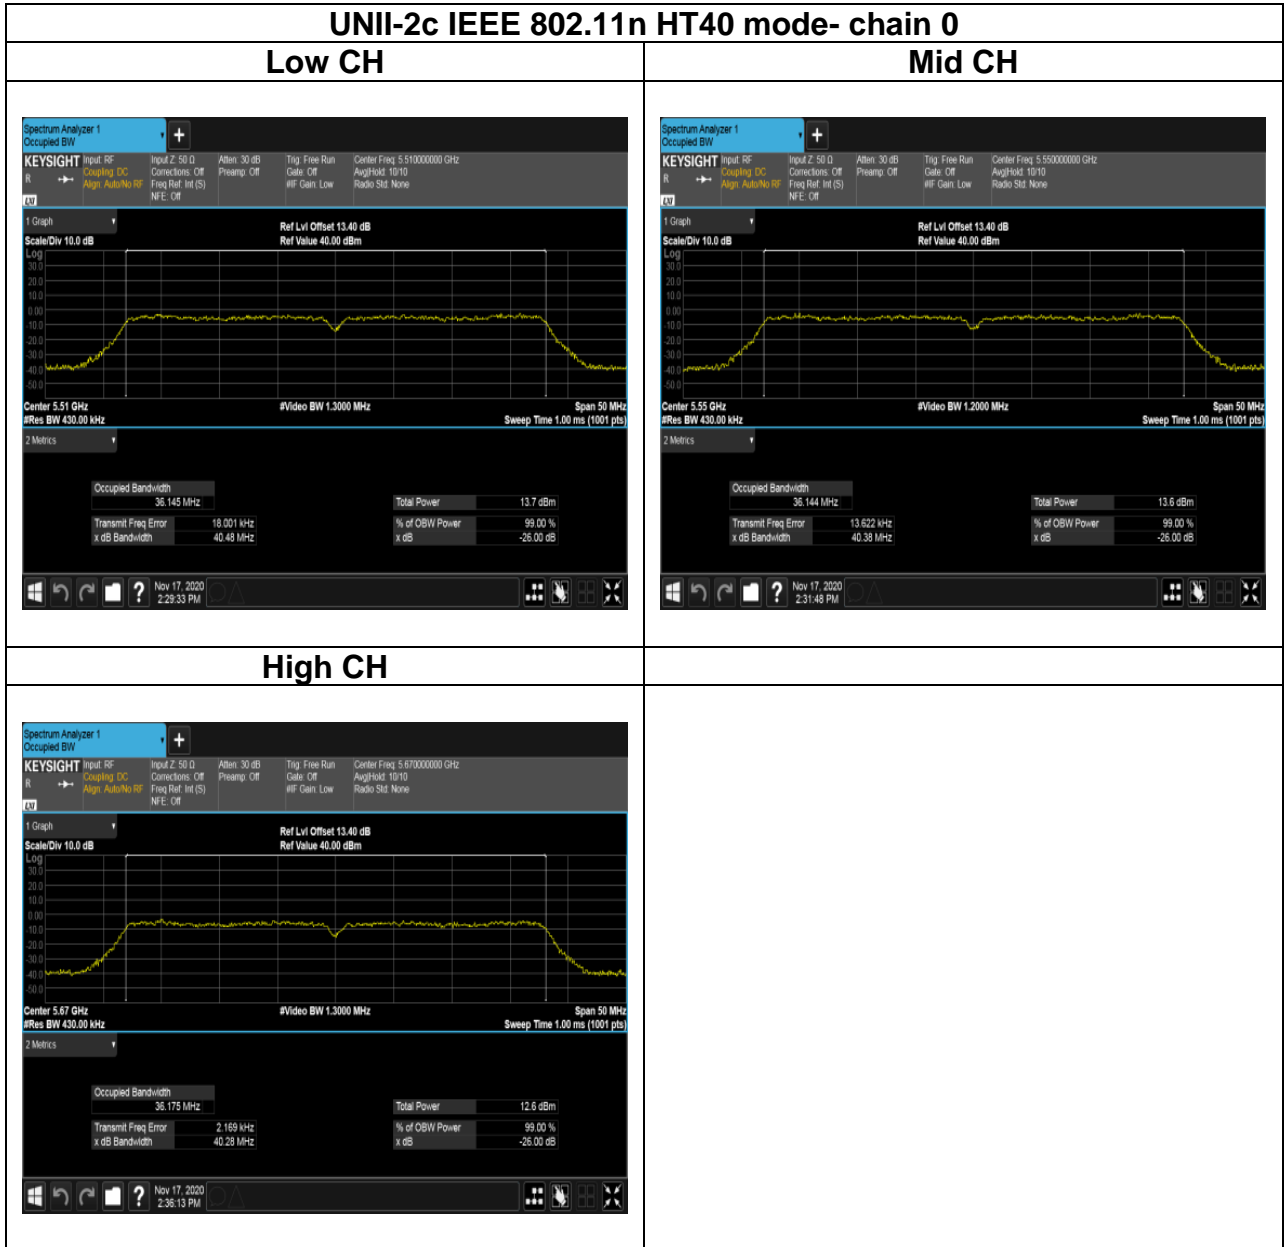


Report No.: T201104D06-RP4

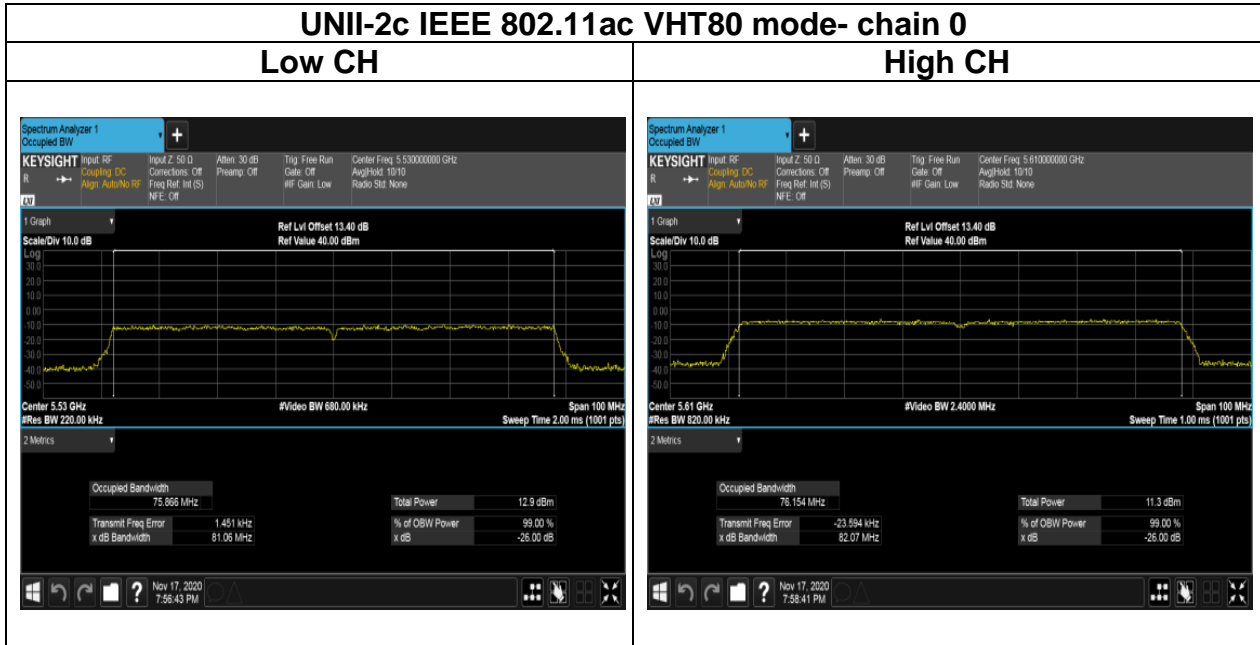


Report No.: T201104D06-RP4

## Test Data (6dB BANDWIDTH)

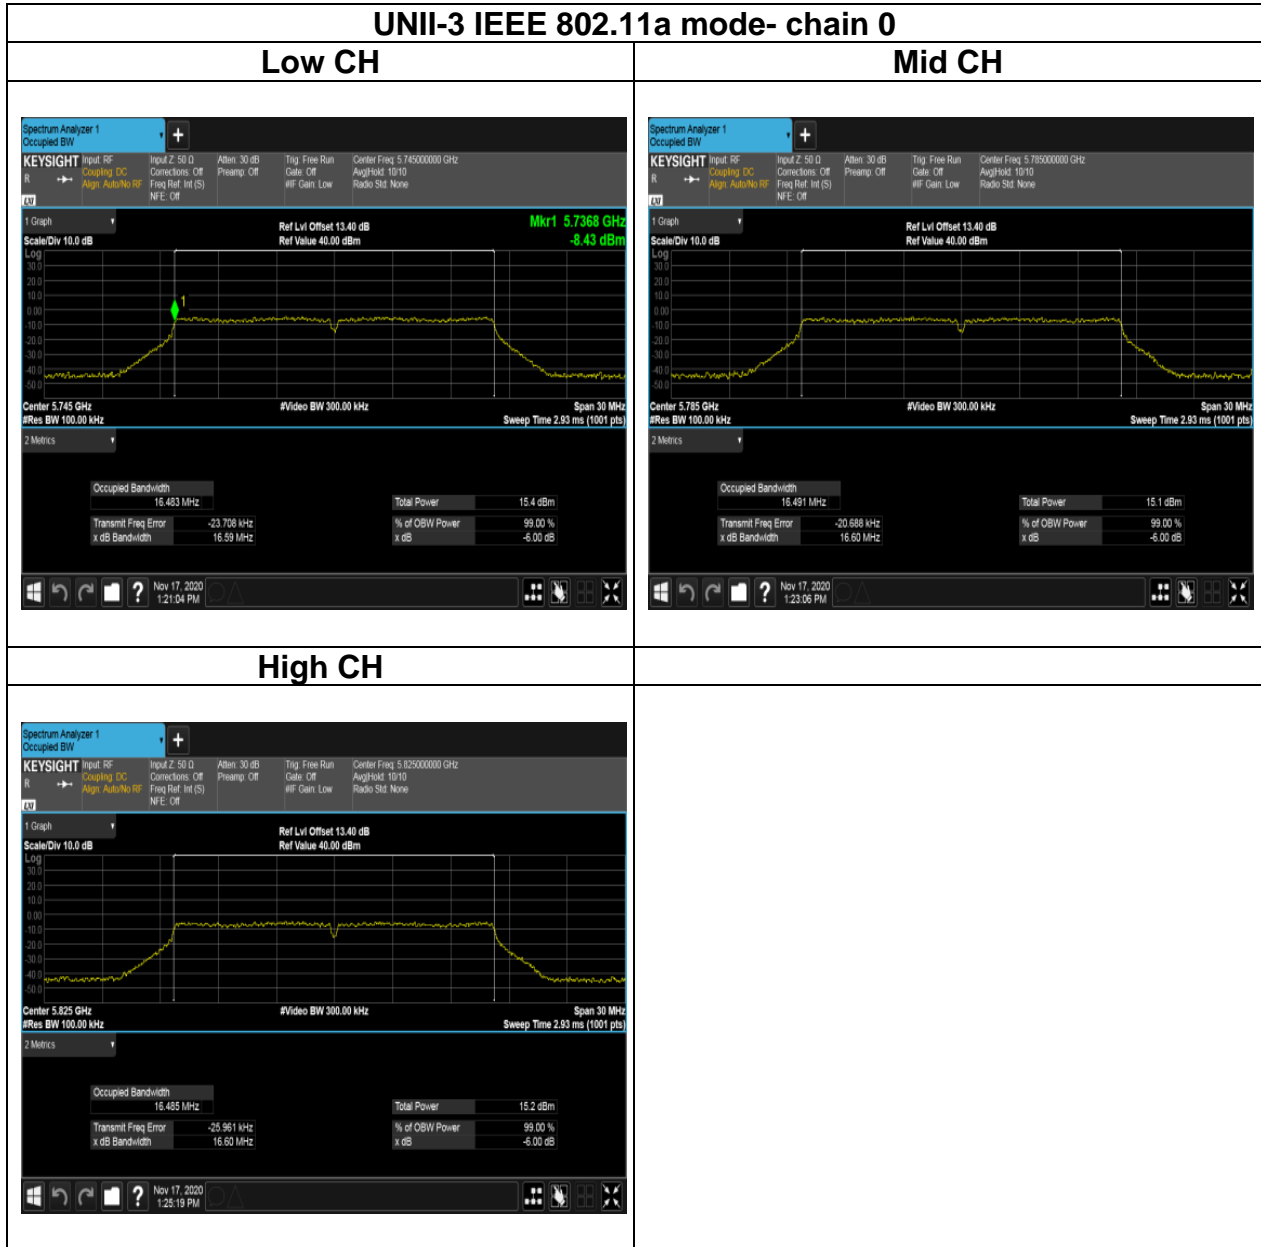




Report No.: T201104D06-RP4

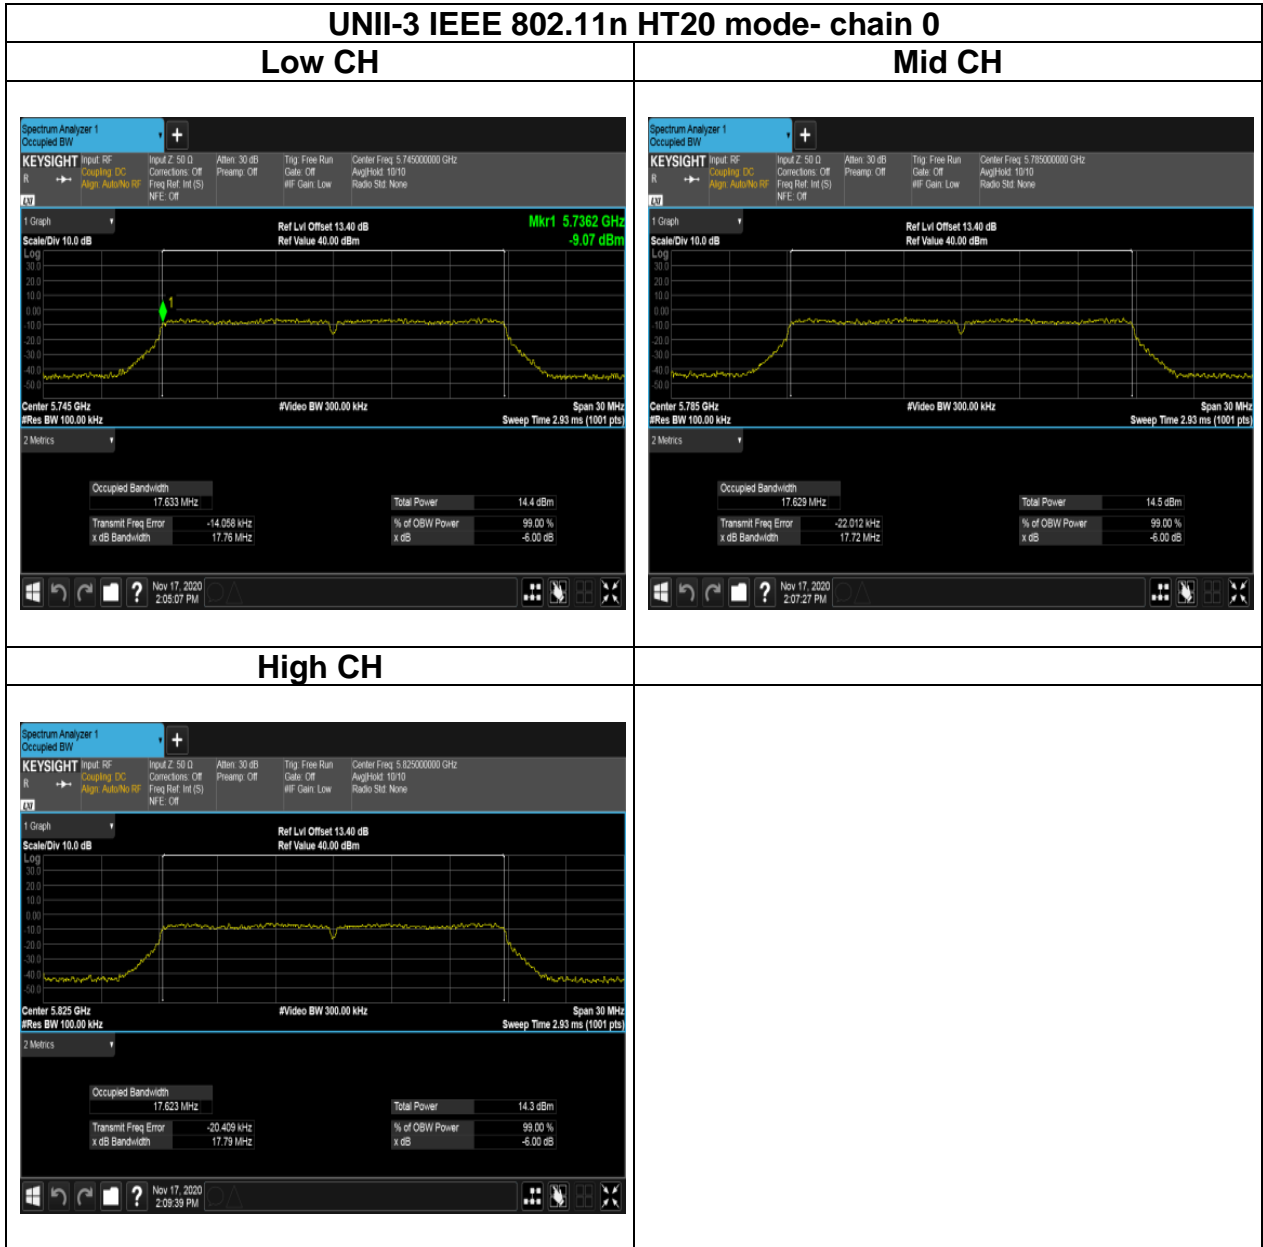


Report No.: T201104D06-RP4

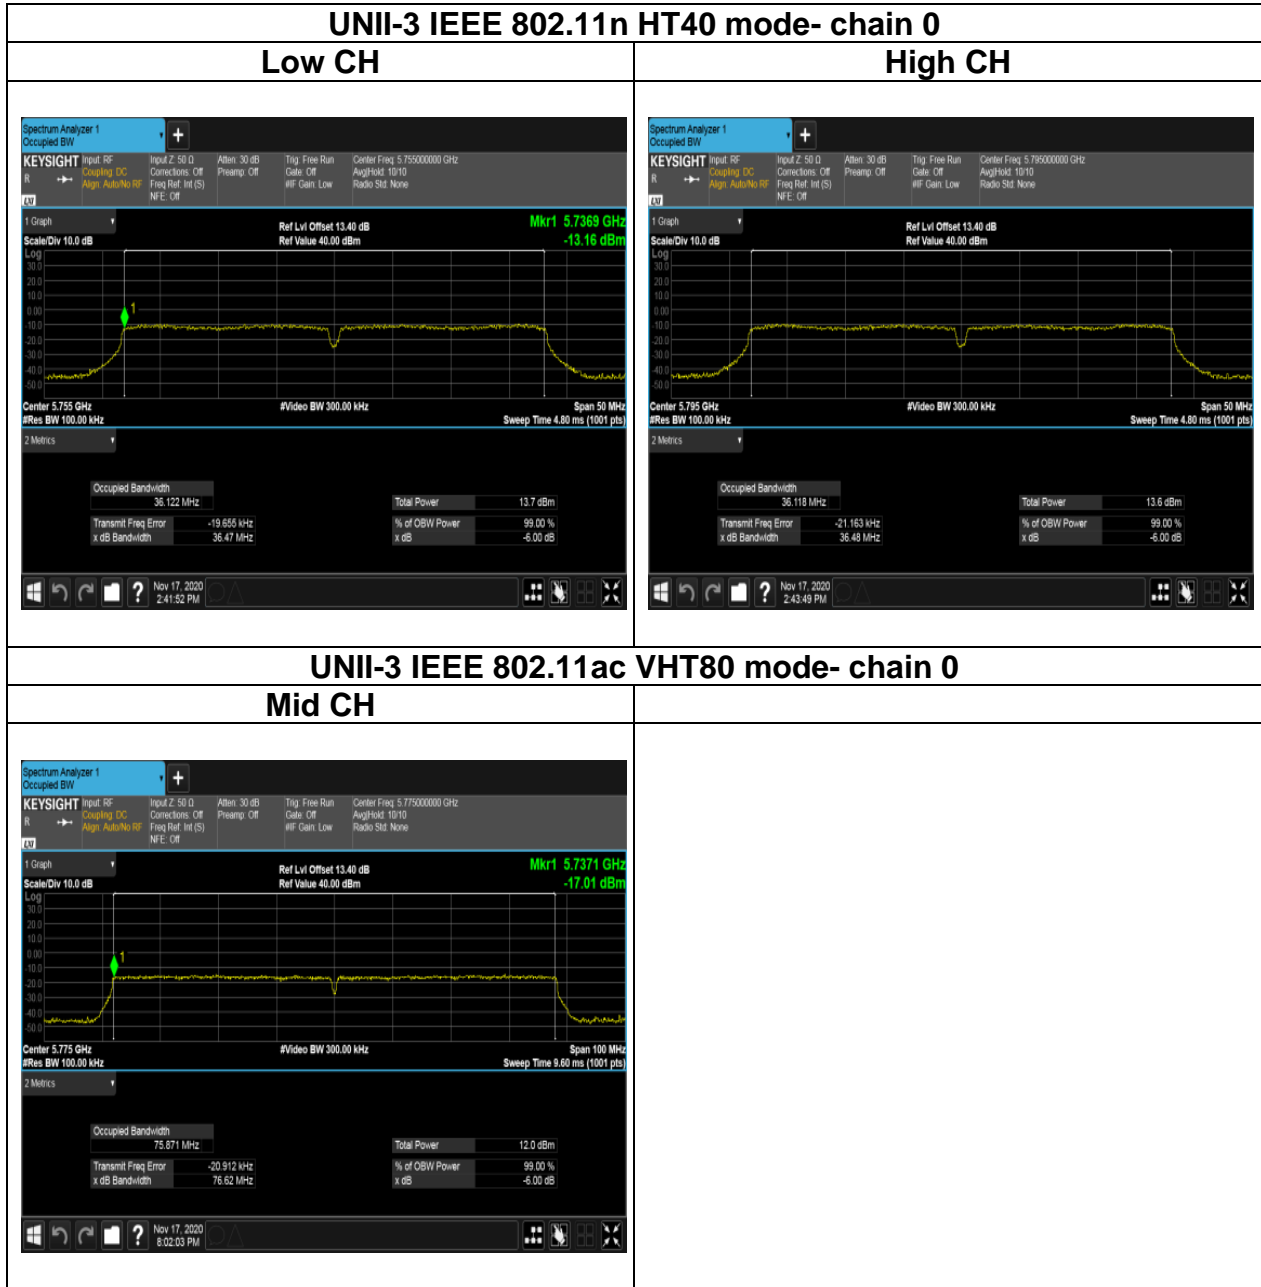


Report No.: T201104D06-RP4


## Test Data (26dB BANDWIDTH)

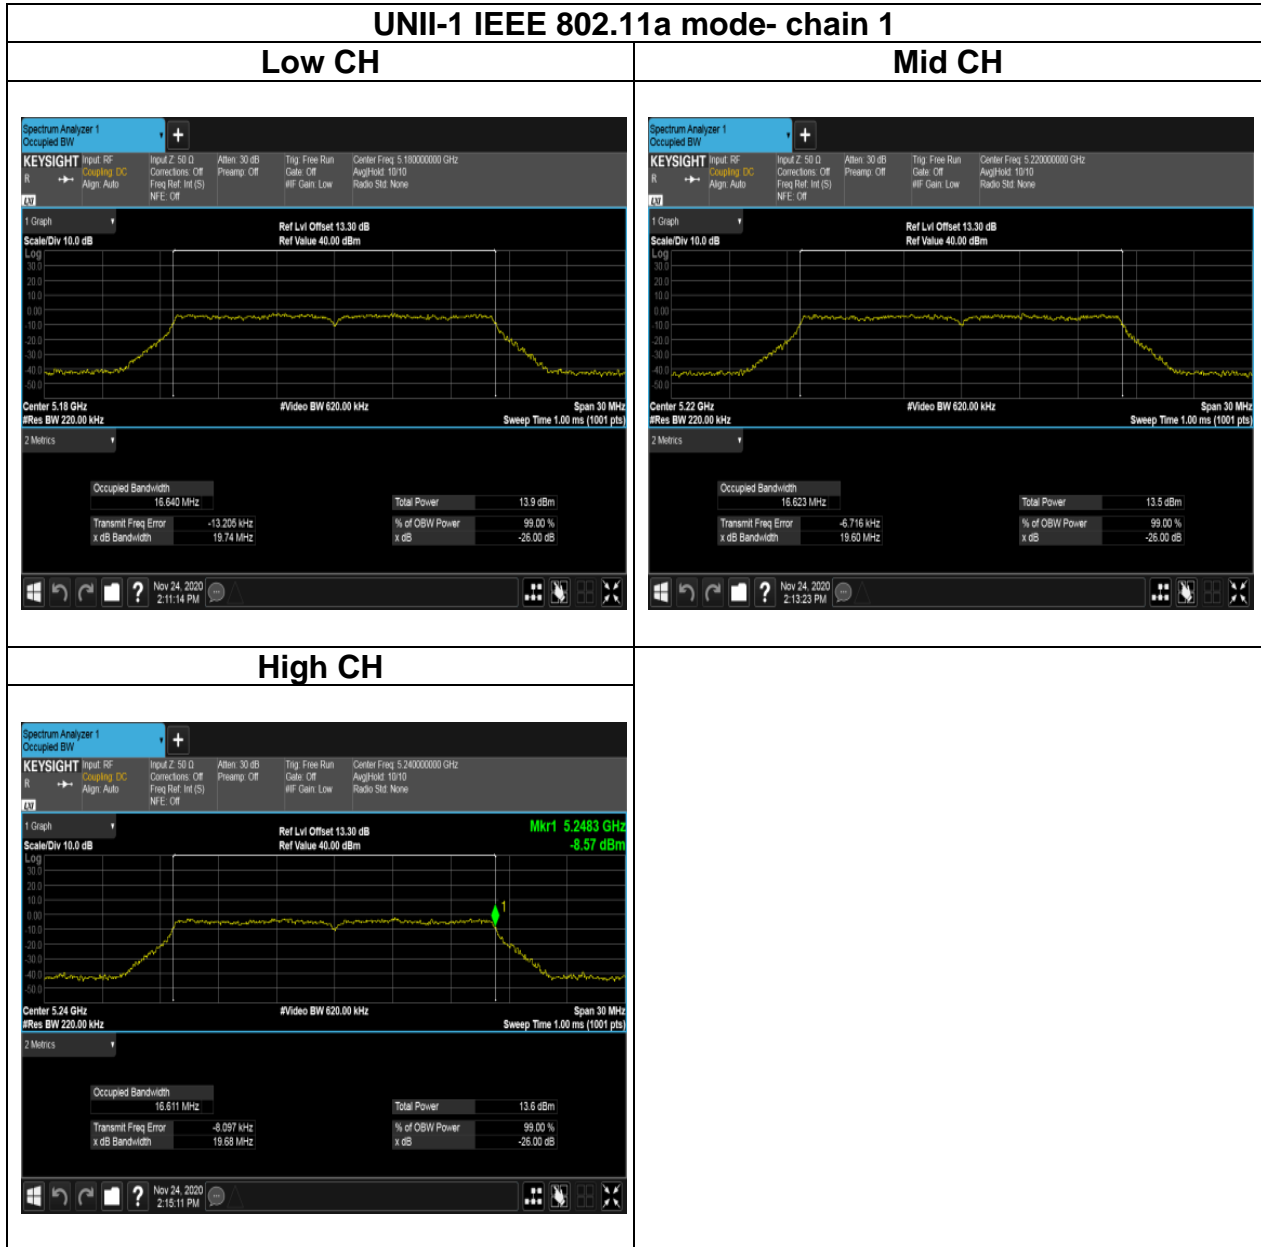

Report No.: T201104D06-RP4

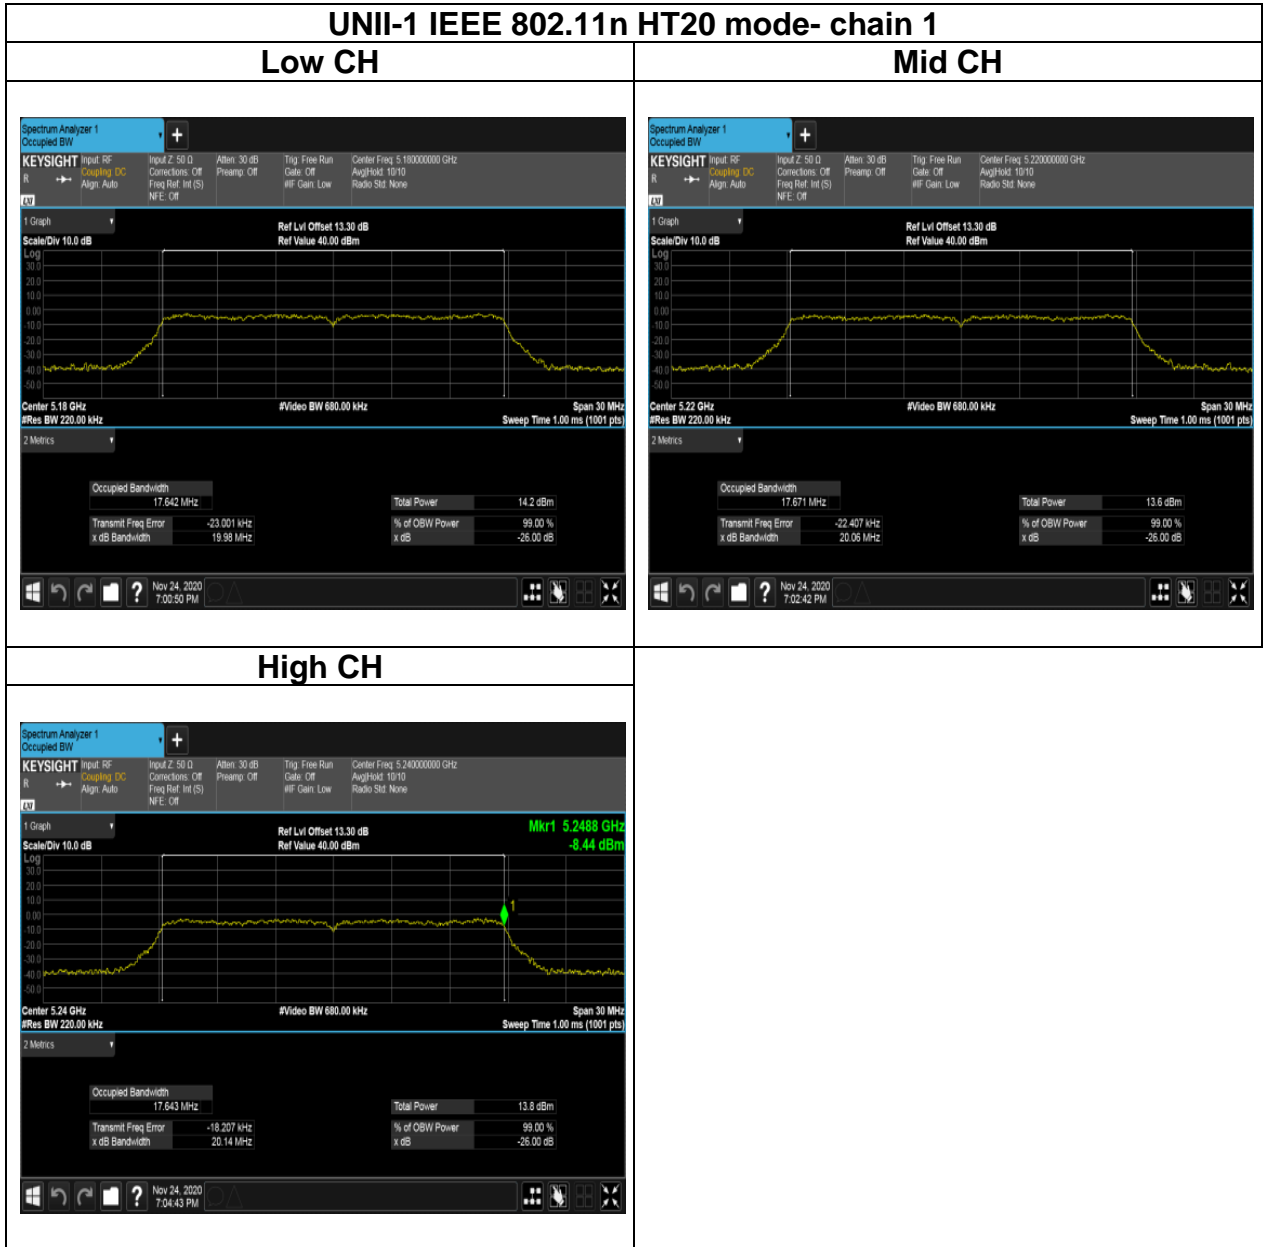


Report No.: T201104D06-RP4

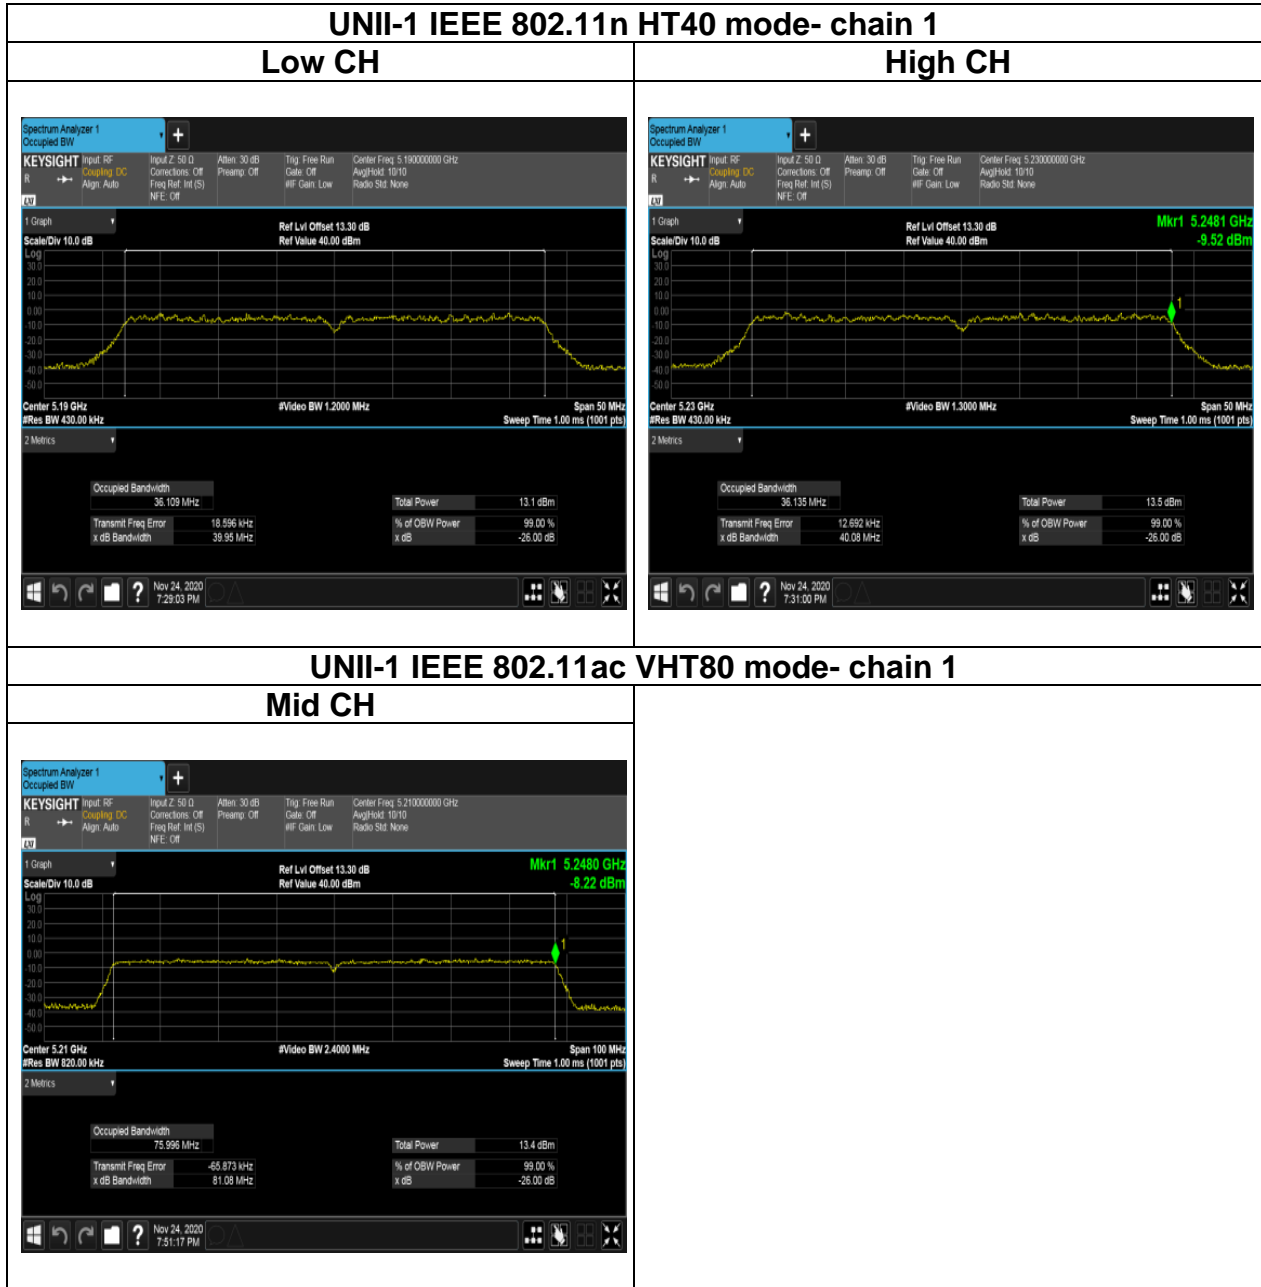


Report No.: T201104D06-RP4


## Test Data (26dB BANDWIDTH)

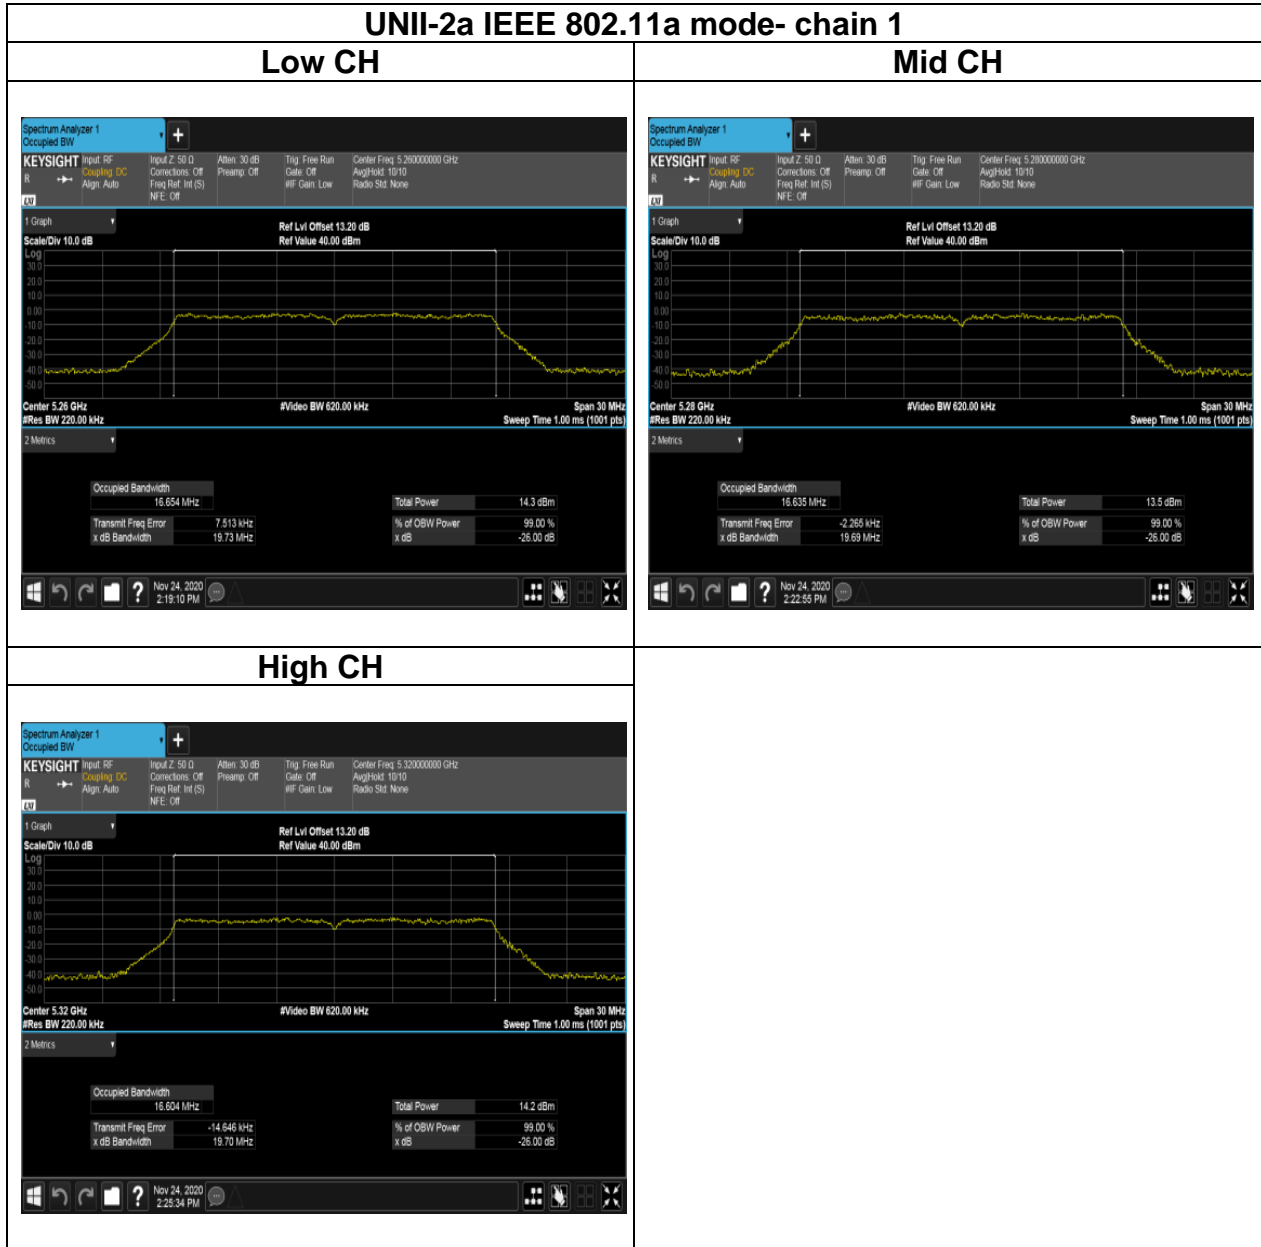

Report No.: T201104D06-RP4

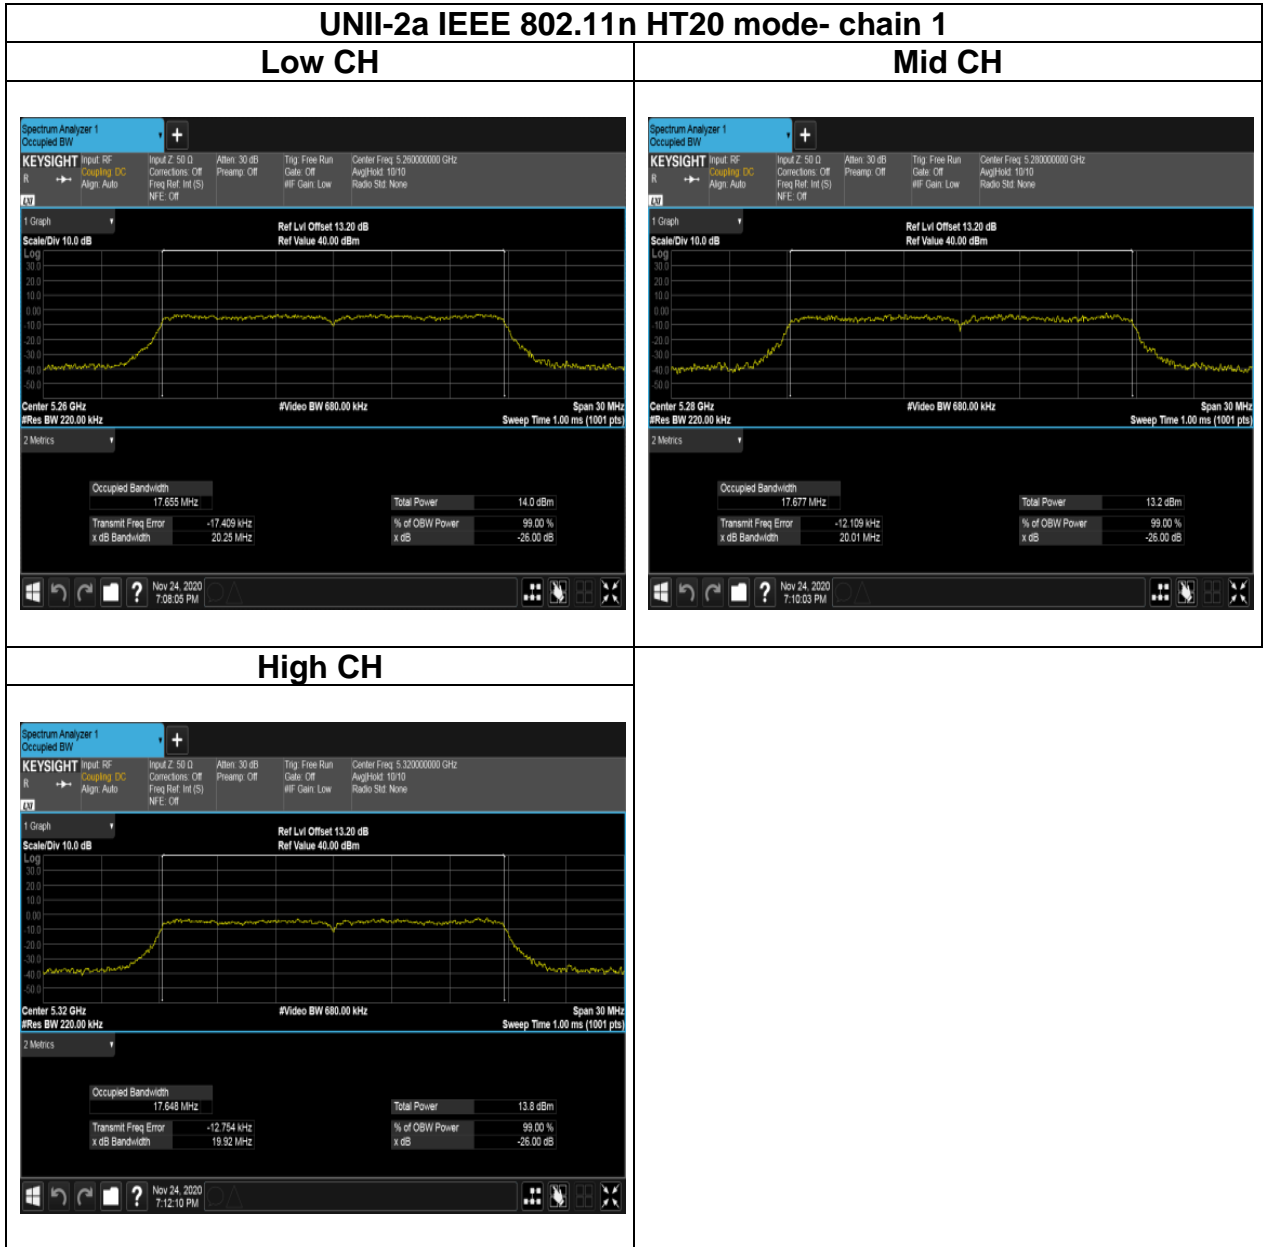


Report No.: T201104D06-RP4

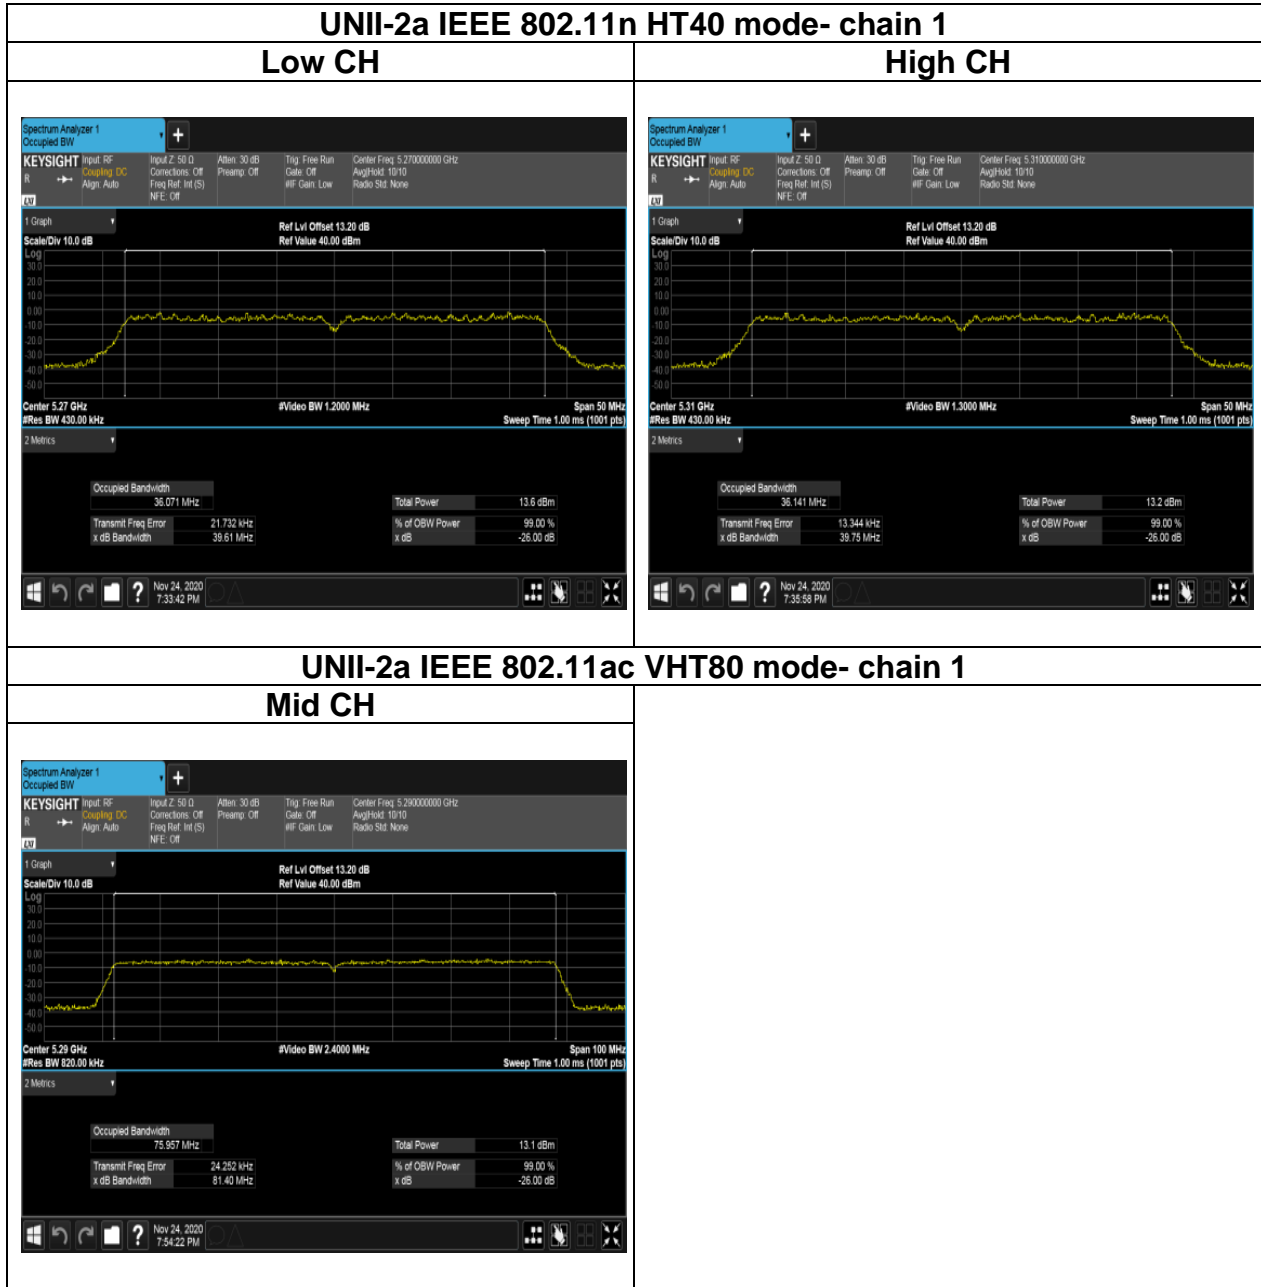




Report No.: T201104D06-RP4


## Test Data (26dB BANDWIDTH)

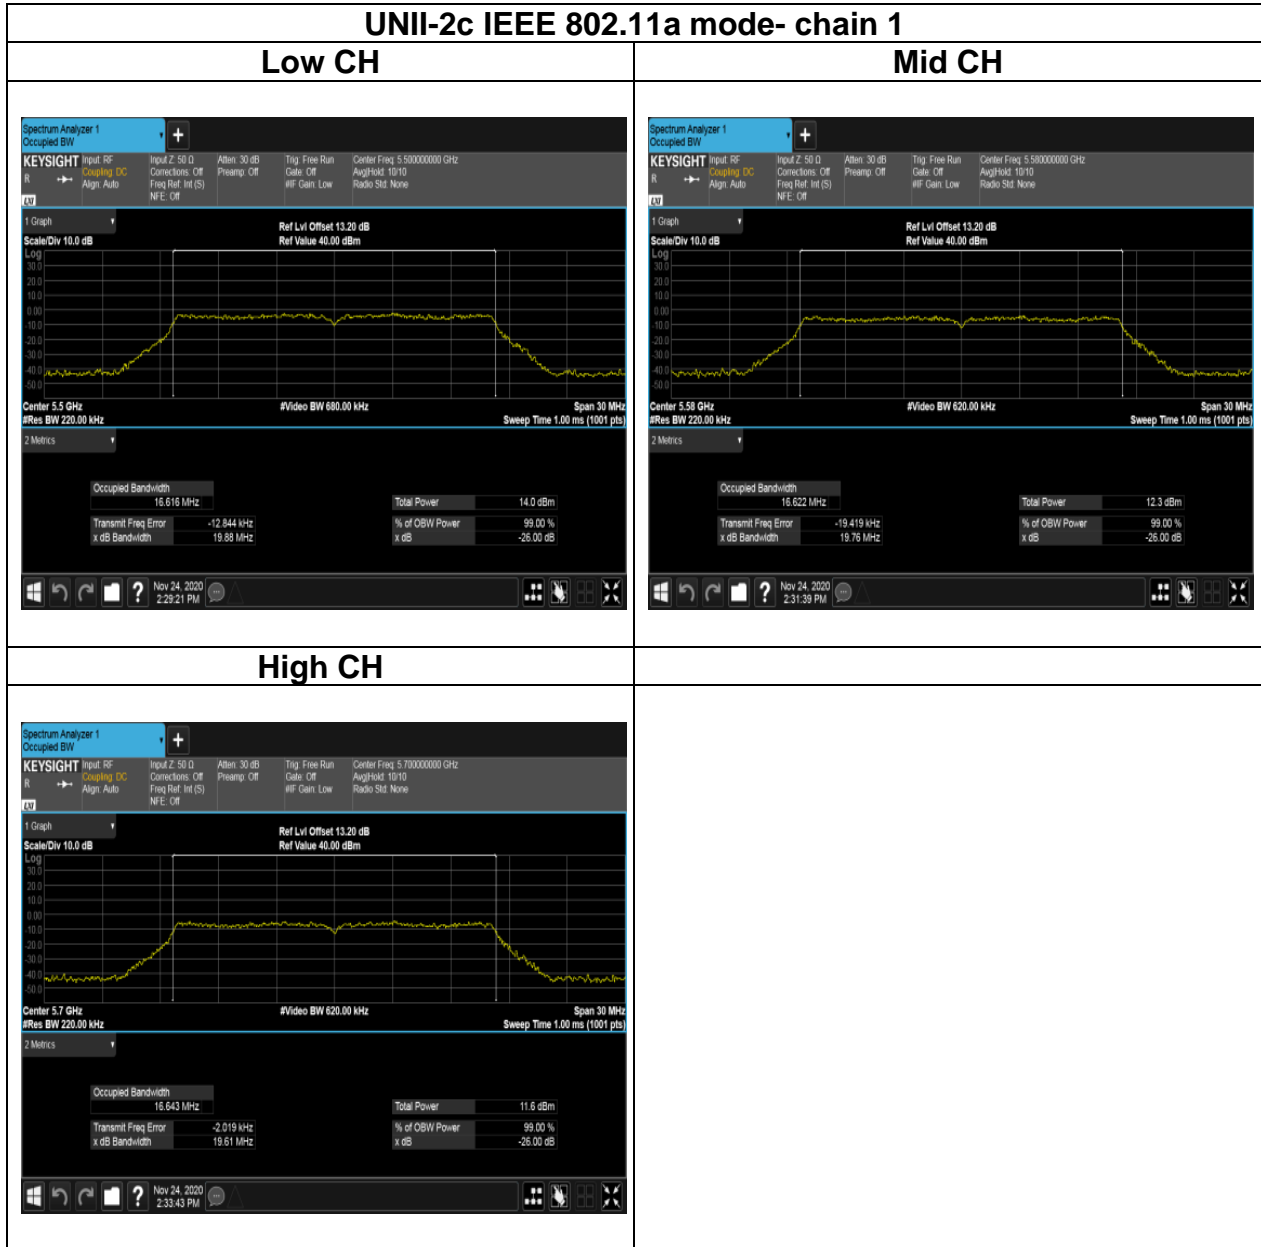


Report No.: T201104D06-RP4

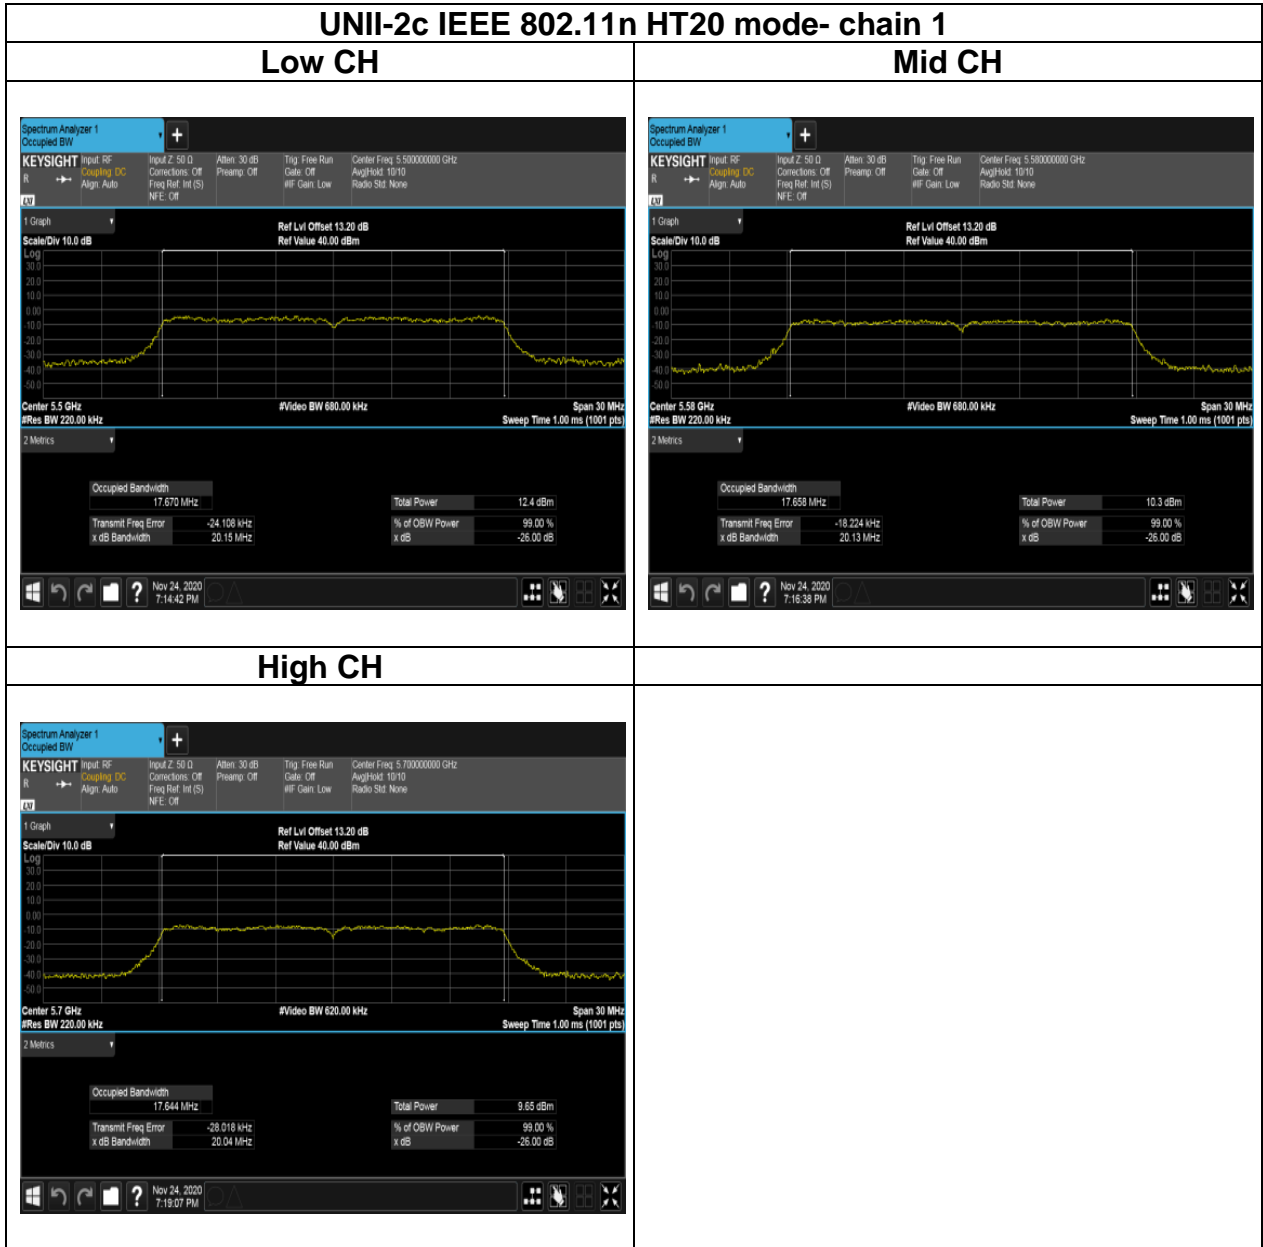

Report No.: T201104D06-RP4

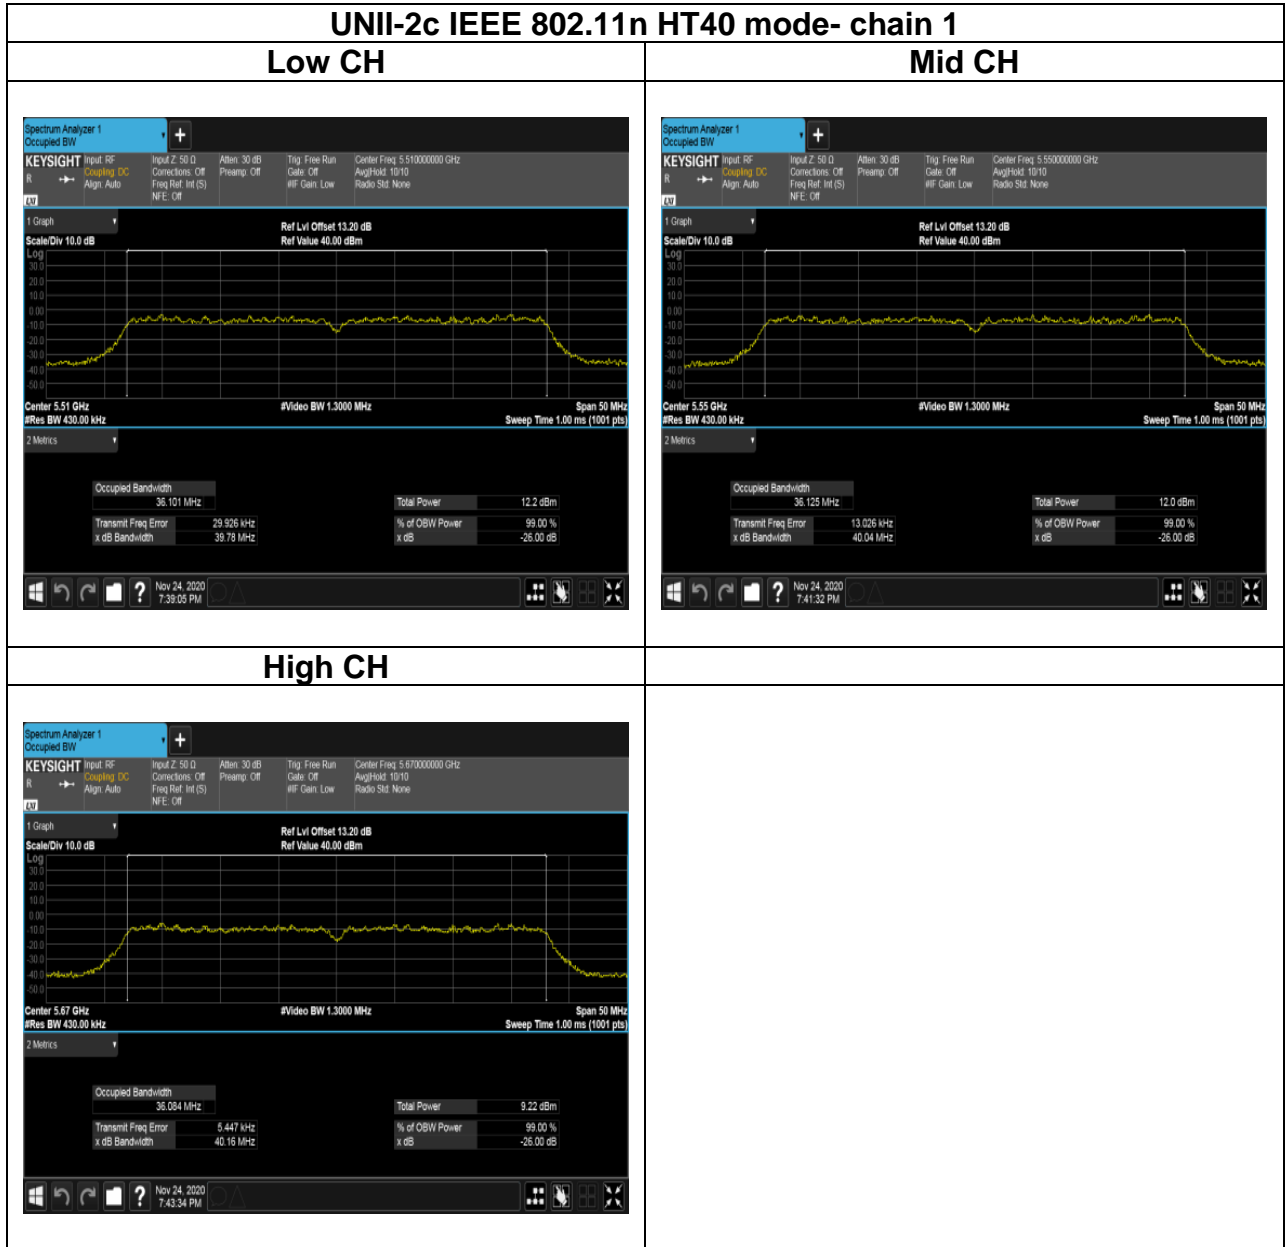


Report No.: T201104D06-RP4

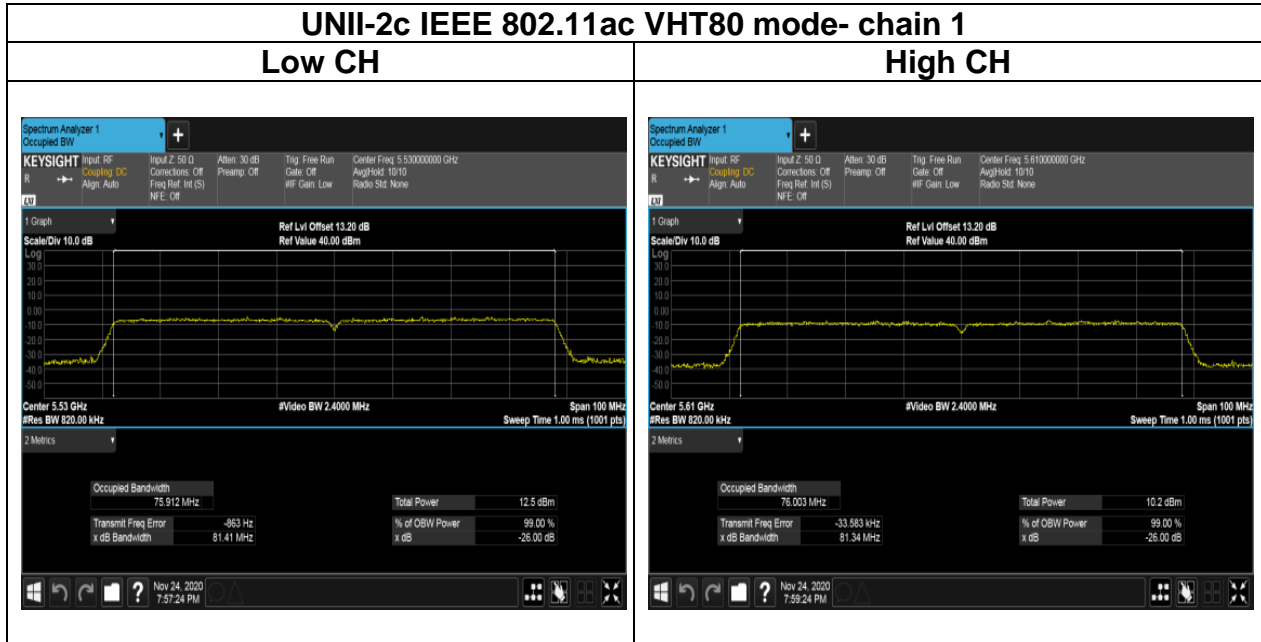


Report No.: T201104D06-RP4

## Test Data (6dB BANDWIDTH)

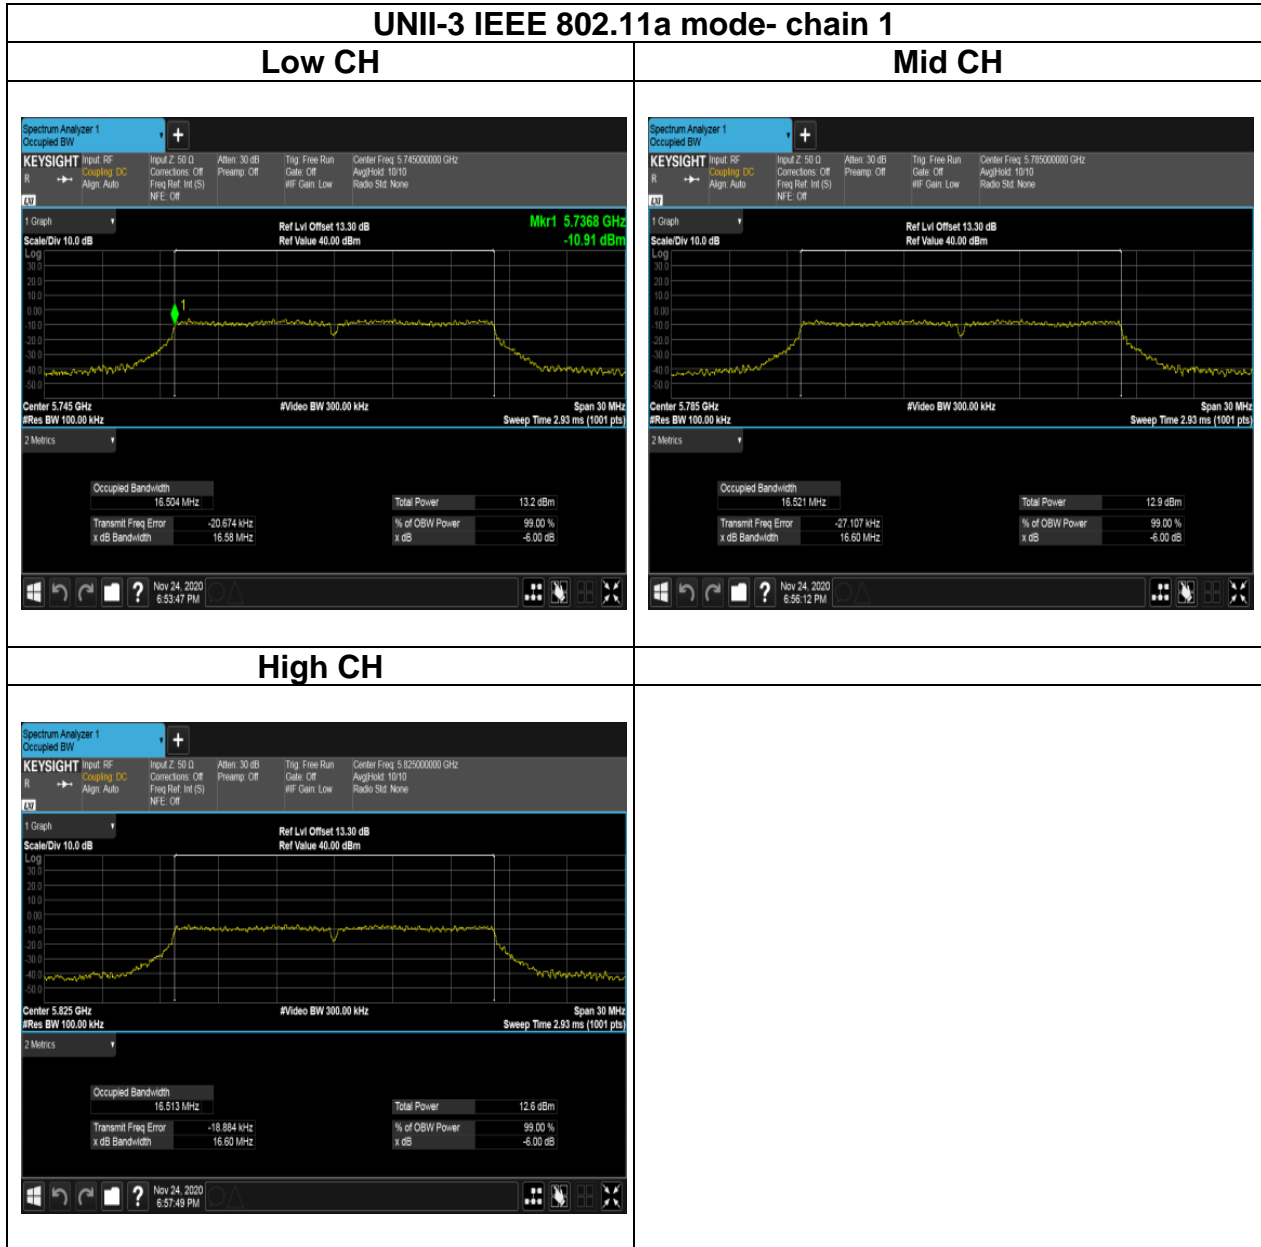

Report No.: T201104D06-RP4

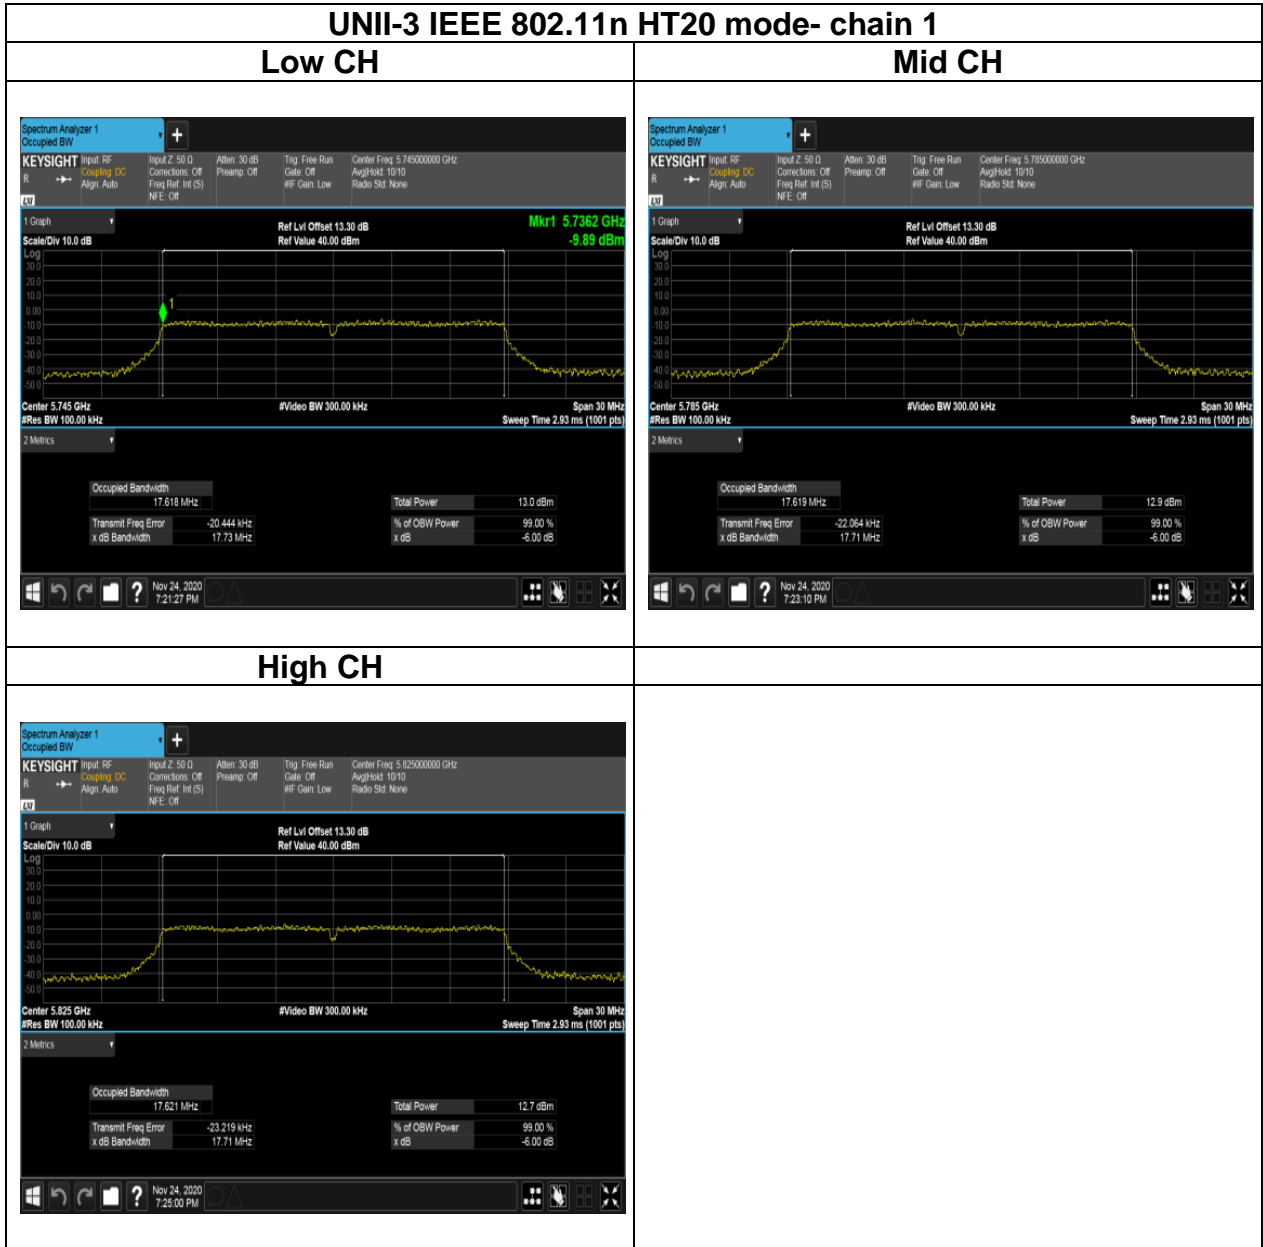

Report No.: T201104D06-RP4

