

FCC Test Report

(PART 24)

Report No.: RFBGSN-WTW-P21120080-6

FCC ID: 2AX8C-3545

Test Model: FL44TE

Received Date: Dec. 09, 2021

Test Date: Dec. 29, 2021 ~ Jan. 10, 2022

Issued Date: Jan. 19, 2022

Applicant: Amazon.com Services LLC

Address: 410 Terry Ave N, Seattle, Washington 98109

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units.....	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	16
3.5 General Description of Applied Standards and references.....	16
4 Test Types and Results	17
4.1 Output Power Measurement	17
4.1.1 Limits of Output Power Measurement.....	17
4.1.2 Test Procedures.....	17
4.1.3 Test Setup.....	17
4.1.4 Test Results	18
4.2 Modulation Characteristics Measurement	22
4.2.1 Limits of Modulation Characteristics.....	22
4.2.2 Test Setup.....	22
4.2.3 Test Procedure	22
4.2.4 Test Results	23
4.3 Frequency Stability Measurement	24
4.3.1 Limits of Frequency Stability Measurement	24
4.3.2 Test Procedure	24
4.3.3 Test Setup.....	24
4.3.4 Test Results	25
4.4 Occupied Bandwidth Measurement.....	38
4.4.1 Test Procedure	38
4.4.2 Test Setup.....	38
4.4.3 Test Result	38
4.5 Band Edge Measurement.....	45
4.5.1 Limits of Band Edge Measurement	45
4.5.2 Test Setup.....	45
4.5.3 Test Procedures.....	45
4.5.4 Test Results	46
4.6 Peak to Average Ratio	58
4.6.1 Limits of Peak to Average Ratio Measurement	58
4.6.2 Test Setup.....	58
4.6.3 Test Procedures.....	58
4.6.4 Test Results	58
4.7 Conducted Spurious Emissions.....	65
4.7.1 Limits of Conducted Spurious Emissions Measurement.....	65
4.7.2 Test Setup.....	65
4.7.3 Test Procedure	65
4.7.4 Test Results	66
4.8 Radiated Emission Measurement.....	81
4.8.1 Limits of Radiated Emission Measurement	81
4.8.2 Test Procedure	81
4.8.3 Deviation from Test Standard	81
4.8.4 Test Setup.....	82
4.8.5 Test Results	83

5 Pictures of Test Arrangements.....	101
Appendix – Information of the Testing Laboratories	102

Release Control Record

Issue No.	Description	Date Issued
RFBGSN-WTW-P21120080-6	Original Release	Jan. 19, 2022

1 Certificate of Conformity

Product: Fleet Edge

Brand: N/A

Test Model: FL44TE


Sample Status: Engineering Sample

Applicant: Amazon.com Services LLC

Test Date: Dec. 29, 2021 ~ Jan. 10, 2022

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

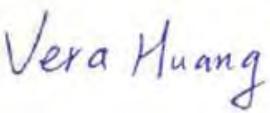
Prepared by : _____, **Date:** _____
Vera Huang / Specialist


Approved by : _____, **Date:** _____
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.89 dB at 978.66 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Sep. 22, 2021	Sep. 21, 2022
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 03, 2021	Dec. 02, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 12, 2021	Apr. 11, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 14, 2021	Nov. 13, 2022
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Oct. 28, 2021	Oct. 27, 2022
HORN Antenna SCHWARZBECK	BBHA 9120 D	209	Nov. 14, 2021	Nov. 13, 2022
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 13, 2021	Apr. 12, 2022
Loop Antenna	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC 012645	980115	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 184045	980116	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 330H	980112	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable EMCI	EMC104-SM-SM-8000	171005	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 05, 2021	Oct. 04, 2022
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 26, 2021	Aug. 25, 2022
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Feb. 07, 2021	Feb. 06, 2022
Temperature & Humidity Chamber GIANT FORCE	GTH-120-40-CP-AR	MAA1306-019	Sep. 10, 2021	Sep. 09, 2022
DC power supply Keysight	U8002A	MY56330015	NA	NA
Digital Multimeter Fluke	87-III	70360742	Jun. 24, 2021	Jun. 23, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	Fleet Edge	
Brand	N/A	
Test Model	FL44TE	
Status of EUT	Engineering Sample	
Power Supply Rating	12 Vdc (adapter)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1914.3 MHz
	LTE Band 25 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1913.5 MHz
	LTE Band 25 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1912.5 MHz
	LTE Band 25 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1910.0 MHz
	LTE Band 25 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1907.5 MHz
	LTE Band 25 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1905.0 MHz
Max. EIRP Power	WCDMA	845.279 mW (29.27dBm)
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	769.130 mW (28.86dBm)
	LTE Band 2 (Channel Bandwidth: 3 MHz)	790.679 mW (28.98dBm)
	LTE Band 2 (Channel Bandwidth: 5 MHz)	812.831 mW (29.10dBm)
	LTE Band 2 (Channel Bandwidth: 10 MHz)	822.243 mW (29.15dBm)
	LTE Band 2 (Channel Bandwidth: 15 MHz)	879.023 mW (29.44dBm)
	LTE Band 2 (Channel Bandwidth: 20 MHz)	939.723 mW (29.73dBm)
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	751.623 mW (28.76dBm)
	LTE Band 25 (Channel Bandwidth: 3 MHz)	765.597 mW (28.84dBm)
	LTE Band 25 (Channel Bandwidth: 5 MHz)	770.903 mW (28.87dBm)
	LTE Band 25 (Channel Bandwidth: 10 MHz)	837.529 mW (29.23dBm)
	LTE Band 25 (Channel Bandwidth: 15 MHz)	860.994 mW (29.35dBm)
	LTE Band 25 (Channel Bandwidth: 20 MHz)	760.326 mW (28.81dBm)

Emission Designator	WCDMA	4M16F9W
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 2 (Channel Bandwidth: 5 MHz)	4M49G7D
	LTE Band 2 (Channel Bandwidth: 10 MHz)	8M98G7D
	LTE Band 2 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 2 (Channel Bandwidth: 20 MHz)	18M0D7W
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1M10G7D
	LTE Band 25 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 25 (Channel Bandwidth: 5 MHz)	4M50G7D
	LTE Band 25 (Channel Bandwidth: 10 MHz)	9M01G7D
	LTE Band 25 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 25 (Channel Bandwidth: 20 MHz)	18M0G7D
	Antenna Type	Refer to Note as below
	Accessory Device	Refer to Note as below
	Data Cable Supplied	N/A

Note:

1. The EUT contains following accessory devices.


Product	Brand	Model	Description
BT/WLAN Module	Intel	9560NGW	802.11 a/b/g/n/ac Wireless LAN + Bluetooth 5
WWAN Module	Quectel	EM06-A	WCDMA, LTE
CPU	Intel	i5-9500TE	CFL-S, 6C 35W
SO-DIMM	Innodisk	--	2667MHz, 8G&16G
LTE Main Antenna	Rivian	N/A	Cable length: 2445mm P/N: J7-1
LTE Aux Antenna	Rivian	N/A	Cable length: 3520mm P/N: J6-1
WiFi Main Antenna	Rivian	PT00206181-A	Cable length: 3550mm P/N: J5-1
WiFi Aux Antenna	Rivian	PT00207642-A	Cable length: 2475mm P/N: J4-1

2. The antenna information is listed as below.

Antenna information		Antenna Gain (dBi)	
Type	Ant.	WCDMA 2 / LTE 2	LTE 25
Multiband Antennas	Main	5.39	5.39
	Aux	4.93	4.93

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

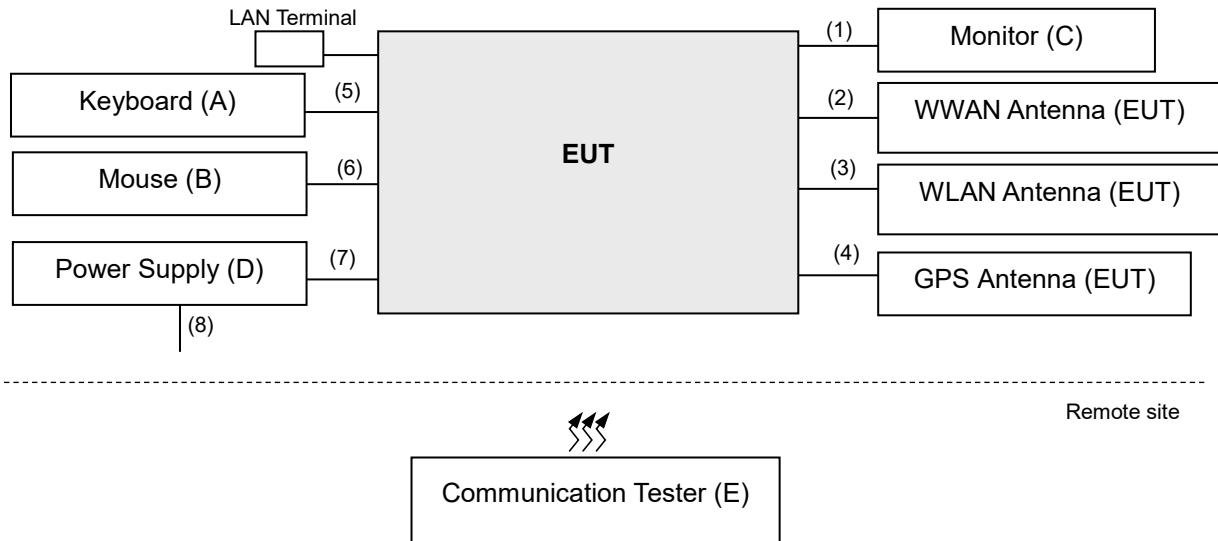

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Keyboard	Lenovo	KB1021	N/A	N/A	--
B	Mouse	DELL	MS111-P	CN-011D3V-71581-1CJ-092E	N/A	--
C	Monitor	HP	HP Z24s	6CM5172L56	N/A	--
D	Power Supply	NA	NA	NA	NA	--
E	Communication Tester	R&S ANRITSU	CMU200 MT8821C	123295 6201502978	N/A NA	For WCDMA For LTE

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item E acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	HDMI Cable	1	2 m	N	0	-
2.	RF Cable	1	2445 mm	N	0	Accessory of the EUT
		1	3520 mm	N	0	Accessory of the EUT
3.	RF Cable	1	3550 mm	N	0	Accessory of the EUT
		1	2475 mm	N	0	Accessory of the EUT
4.	RF Cable	1	0.5 m	N	0	Accessory of the EUT
5.	USB Cable	1	2.4 m	N	0	-
6.	USB Cable	1	2.2 m	N	0	-
7.	DC power Cable	1	1.2 m	N	0	-
8.	AC power Cable	1	1.8 m	N	0	-

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA	X-plane	X-plane
LTE Band 2	X-plane	X-plane
LTE Band 25	X-plane	X-plane

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Modulation Characteristics	9262 to 9538	9400	WCDMA
-	Frequency Stability	9262 to 9538	9262, 9538	WCDMA
-	Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
-	Band Edge	9262 to 9538	9262, 9538	WCDMA
-	Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
-	Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	18700 to 19100	18900	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	6 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3 MHz	QPSK	15 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5 MHz	QPSK	25 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10 MHz	QPSK	50 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15 MHz	QPSK	75 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	18607 to 19193	18607	1.4 MHz	QPSK	1 RB / 0 RB Offset
			19193	1.4 MHz	QPSK	6 RB / 0 RB Offset
		18615 to 19185	18615	3 MHz	QPSK	1 RB / 5 RB Offset
			19185	3 MHz	QPSK	6 RB / 0 RB Offset
		18625 to 19175	18625	5 MHz	QPSK	1 RB / 0 RB Offset
			19175	5 MHz	QPSK	15 RB / 0 RB Offset
		18650 to 19150	18650	10 MHz	QPSK	1 RB / 24 RB Offset
			19150	10 MHz	QPSK	25 RB / 0 RB Offset
		18675 to 19125	18675	15 MHz	QPSK	1 RB / 0 RB Offset
			19125	15 MHz	QPSK	75 RB / 0 RB Offset
		18700 to 19100	18700	20 MHz	QPSK	1 RB / 74 RB Offset
			19100	20 MHz	QPSK	100 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel (above 1GHz) for final testing.

LTE Band 25

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	26140 to 26590	26365	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Frequency Stability	26047 to 26683	26047, 26683	1.4 MHz	QPSK	6 RB / 0 RB Offset
		26055 to 26675	26055, 26675	3 MHz	QPSK	15 RB / 0 RB Offset
		26065 to 26665	26065, 26665	5 MHz	QPSK	25 RB / 0 RB Offset
		26090 to 26640	26090, 26640	10 MHz	QPSK	50 RB / 0 RB Offset
		26115 to 26615	26115, 26615	15 MHz	QPSK	75 RB / 0 RB Offset
		26140 to 26590	26140, 26590	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	26047 to 26683	26047	1.4 MHz	QPSK	1 RB / 0 RB Offset
			26683	1.4 MHz		6 RB / 0 RB Offset
		26055 to 26675	26055	3 MHz	QPSK	1 RB / 5 RB Offset
			26675	3 MHz		6 RB / 0 RB Offset
		26065 to 26665	26065	5 MHz	QPSK	1 RB / 0 RB Offset
			26665	5 MHz		25 RB / 0 RB Offset
		26090 to 26640	26090	10 MHz	QPSK	1 RB / 24 RB Offset
			26640	10 MHz		25 RB / 0 RB Offset
		26115 to 26615	26115	15 MHz	QPSK	1 RB / 0 RB Offset
			26615	15 MHz		75 RB / 0 RB Offset
		26140 to 26590	26140	20 MHz	QPSK	1 RB / 74 RB Offset
			26590	20 MHz		100 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Conducted Emission	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel (above 1GHz) for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	12 Vdc	Rui Chan
Modulation Characteristics	26 deg. C, 58 % RH	12 Vdc	Rui Chan
Frequency Stability	26 deg. C, 58 % RH	12 Vdc	Rui Chan
Occupied Bandwidth	26 deg. C, 58 % RH	12 Vdc	Rui Chan
Band Edge	26 deg. C, 58 % RH	12 Vdc	Rui Chan
Peak to Average Ratio	26 deg. C, 58 % RH	12 Vdc	Rui Chan
Conducted Emission	26 deg. C, 58 % RH	12 Vdc	Rui Chan
Radiated Emission	21 deg. C, 63 % RH	120 Vac, 60 Hz	Tim Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:
FCC 47 CFR Part 2
FCC 47 CFR Part 24
ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

References Test Guidance:
KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA-603-E 2016

NOTE: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:

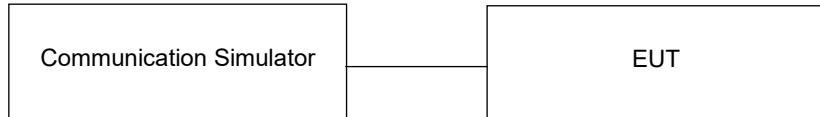

4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.88	23.72	23.85

LTE Band 2															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel	18700	18900	19100	18675	18900			Frequency (MHz)	1880.0	1900.0	19125	1857.5	
		Frequency (MHz)	1860.0	1880.0	1900.0	1857.5	1880.0			1880.0	1900.0	1902.5	1857.5		
20M	QPSK	1	0	24.34	24.32	24.24	0	15M	QPSK	1	0	24.05	23.77	23.97	0
		1	50	23.23	23.24	23.25	0			1	37	23.32	23.01	23.13	0
		1	99	23.42	23.58	23.66	0			1	74	23.94	23.62	23.70	0
		50	0	22.66	22.82	22.89	1			36	0	22.95	22.72	22.89	1
		50	25	22.33	22.47	22.52	1			36	19	22.53	22.32	22.53	1
		50	50	22.31	22.53	22.55	1			36	39	22.50	22.39	22.54	1
		100	0	22.35	22.58	22.54	1			75	0	22.53	22.50	22.72	1
	16QAM	1	0	23.68	23.66	23.46	1		16QAM	1	0	23.25	23.17	23.31	1
		1	50	22.49	22.49	22.39	1			1	37	22.66	22.56	22.68	1
		1	99	22.77	22.87	22.74	1			1	74	22.69	22.66	22.79	1
		50	0	21.58	21.77	21.56	2			36	0	21.54	21.64	21.81	2
		50	25	21.18	21.45	21.20	2			36	19	21.28	21.35	21.43	2
		50	50	21.14	21.52	21.23	2			36	39	21.05	21.24	21.41	2
		100	0	21.15	21.58	21.34	2			75	0	21.35	21.52	21.76	2
		1	0	23.71	23.76	23.72	0			1	0	23.66	23.63	23.71	0
10M	QPSK	1	24	23.26	23.31	23.30	0	5M	QPSK	1	12	23.36	23.35	23.52	0
		1	49	23.49	23.58	23.53	0			1	24	23.27	23.26	23.33	0
		25	0	23.50	23.55	23.54	1			12	0	22.35	22.42	22.49	1
		25	12	22.26	22.43	22.38	1			12	6	22.27	22.36	22.40	1
		25	25	22.10	22.36	22.24	1			12	13	22.38	22.48	22.46	1
		50	0	22.23	22.45	22.26	1			25	0	22.16	22.38	22.29	1
		1	0	22.95	23.06	22.87	1			1	0	22.85	22.67	22.79	1
	16QAM	1	24	22.25	22.51	22.32	1		16QAM	1	12	22.61	22.44	22.54	1
		1	49	22.56	22.77	22.68	1			1	24	22.49	22.34	22.37	1
		25	0	21.11	21.42	21.23	2			12	0	21.49	21.49	21.48	2
		25	12	21.08	21.36	21.25	2			12	6	21.41	21.42	21.47	2
		25	25	21.05	21.35	21.17	2			12	13	21.29	21.42	21.54	2
		50	0	20.99	21.43	21.29	2			25	0	21.06	21.33	21.46	2
		1	0	23.45	23.59	23.59	0			1	0	23.47	23.18	23.43	0
		1	7	23.35	23.26	23.47	0			1	2	23.32	23.08	23.39	0
3M	QPSK	1	14	23.27	23.24	23.44	0	1.4M	QPSK	1	5	23.34	23.06	23.32	0
		8	0	22.41	22.35	22.56	1			3	0	23.25	23.03	23.20	0
		8	3	22.24	22.32	22.48	1			3	1	23.43	23.26	23.42	0
		8	7	22.04	22.26	22.33	1			3	3	23.32	23.10	23.16	0
		15	0	21.92	22.29	22.40	1			6	0	22.41	22.23	22.33	1
		1	0	22.81	22.63	22.72	1			1	0	22.53	22.47	22.64	1
		1	7	22.46	22.42	22.46	1			1	2	22.32	22.23	22.40	1
	16QAM	1	14	22.33	22.38	22.38	1		16QAM	1	5	22.33	22.37	22.55	1
		8	0	21.44	21.46	21.51	2			3	0	22.26	22.34	22.52	1
		8	3	21.18	21.35	21.40	2			3	1	22.17	22.32	22.49	1
		8	7	21.15	21.32	21.28	2			3	3	22.05	22.23	22.37	1
		15	0	20.98	21.29	21.16	2			6	0	20.97	21.24	21.31	2

LTE Band 25															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590				Channel		26115	26365	26615	
		Frequency (MHz)		1860.0	1882.5	1905.0				Frequency (MHz)		1857.5	1882.5	1907.5	
20M	QPSK	1	0	23.42	23.18	23.34	0	15M	QPSK	1	0	23.84	23.65	23.91	0
		1	50	23.25	23.09	23.24	0			1	37	23.05	22.86	23.20	0
		1	99	23.29	23.07	23.21	0			1	74	23.83	23.56	23.96	0
		50	0	22.55	22.26	22.38	1			36	0	22.69	22.52	22.89	1
		50	25	22.67	22.30	22.39	1			36	19	22.46	22.27	22.70	1
	16QAM	50	50	22.62	22.29	22.29	1			36	39	22.47	22.38	22.73	1
		100	0	22.68	22.36	22.45	1			75	0	22.65	22.52	22.81	1
		1	0	22.90	22.51	22.73	1		16QAM	1	0	23.22	23.13	23.29	1
		1	50	22.66	22.27	22.52	1			1	37	22.60	22.57	22.81	1
		1	99	22.84	22.40	22.67	1			1	74	22.94	22.86	23.05	1
10M	QPSK	50	0	21.63	21.24	21.41	2			36	0	21.46	21.34	21.60	2
		50	25	21.61	21.31	21.42	2			36	19	21.28	21.18	21.38	2
		50	50	21.47	21.19	21.35	2			36	39	21.37	21.23	21.53	2
		100	0	21.46	21.21	21.35	2			75	0	21.62	21.45	21.76	2
	16QAM	1	0	23.71	23.56	23.84	0		16QAM	1	0	23.45	23.41	23.48	0
		1	24	23.37	23.23	23.58	0			1	12	23.22	23.17	23.20	0
		1	49	23.26	23.14	23.59	0			1	24	23.42	23.29	23.33	0
		25	0	22.44	22.36	22.72	1			12	0	22.36	22.32	22.29	1
		25	12	22.40	22.25	22.53	1			12	6	22.15	22.21	22.16	1
3M	QPSK	25	25	22.27	22.22	22.48	1			12	13	22.17	22.22	22.19	1
		50	0	22.46	22.38	22.63	1			25	0	22.21	22.19	22.07	1
		1	0	22.84	22.81	22.93	1		16QAM	1	0	22.67	22.65	22.87	1
		1	24	22.20	22.23	22.41	1			1	12	22.59	22.61	22.81	1
		1	49	22.58	22.53	22.75	1			1	24	22.54	22.54	22.80	1
	16QAM	25	0	21.46	21.42	21.68	2			12	0	21.20	21.25	21.56	2
		25	12	21.25	21.24	21.42	2			12	6	21.16	21.27	21.61	2
		25	25	21.21	21.27	21.45	2			12	13	20.94	21.12	21.52	2
		50	0	21.43	21.44	21.53	2			25	0	21.13	21.30	21.62	2
		1	0	23.42	23.43	23.45	0			1	0	23.25	23.13	23.37	0
3M	QPSK	1	7	23.07	23.18	23.10	0	1.4M	QPSK	1	2	23.21	23.08	23.33	0
		1	14	23.01	23.12	23.09	0			1	5	23.02	22.93	23.17	0
		8	0	22.00	22.07	22.05	1			3	0	23.03	22.96	23.21	0
		8	3	21.98	22.11	22.04	1			3	1	23.19	23.05	23.34	0
		8	7	21.96	22.12	21.97	1			3	3	23.23	23.09	23.33	0
	16QAM	15	0	21.91	22.13	21.95	1		16QAM	6	0	22.19	22.12	22.45	1
		1	0	22.56	22.46	22.63	1			1	0	22.93	22.37	22.83	1
		1	7	22.46	22.34	22.56	1			1	2	22.83	22.24	22.68	1
		1	14	22.24	22.16	22.39	1			1	5	22.81	22.16	22.58	1
		8	0	21.51	21.35	21.59	2			3	0	22.91	22.21	22.72	1
		8	3	21.32	21.13	21.29	2			3	1	22.79	22.17	22.75	1
		8	7	21.38	21.15	21.30	2			3	3	22.90	22.23	22.85	1
		15	0	21.38	21.24	21.37	2			6	0	22.12	21.42	21.98	2

EIRP Power (dBm)

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	29.27	29.11	29.24

*EIRP = Conducted + antenna gain (5.39dB)

LTE Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel	18700	18900	19100	Channel				Channel	18675	18900	19125	Channel	
		Frequency (MHz)	1860.0	1880.0	1900.0	Frequency (MHz)				Frequency (MHz)	1857.5	1880.0	1902.5	Frequency (MHz)	
20M	QPSK	1	0	29.73	29.71	29.63	0	15M	QPSK	1	0	29.44	29.16	29.36	0
		1	50	28.62	28.63	28.64	0			1	37	28.71	28.40	28.52	0
		1	99	28.81	28.97	29.05	0			1	74	29.33	29.01	29.09	0
		50	0	28.05	28.21	28.28	1			36	0	28.34	28.11	28.28	1
		50	25	27.72	27.86	27.91	1			36	19	27.92	27.71	27.92	1
	16QAM	50	50	27.70	27.92	27.94	1			36	39	27.89	27.78	27.93	1
		100	0	27.74	27.97	27.93	1			75	0	27.92	27.89	28.11	1
		1	0	29.07	29.05	28.85	1			1	0	28.64	28.56	28.70	1
		1	50	27.88	27.88	27.78	1			1	37	28.05	27.95	28.07	1
		1	99	28.16	28.26	28.13	1			1	74	28.08	28.05	28.18	1
10M	QPSK	50	0	26.97	27.16	26.95	2		16QAM	36	0	26.93	27.03	27.20	2
		50	25	26.57	26.84	26.59	2			36	19	26.67	26.74	26.82	2
		50	50	26.53	26.91	26.62	2			36	39	26.44	26.63	26.80	2
		100	0	26.54	26.97	26.73	2			75	0	26.74	26.91	27.15	2
		1	0	29.10	29.15	29.11	0			1	0	29.05	29.02	29.10	0
	16QAM	1	24	28.65	28.70	28.69	0			1	12	28.75	28.74	28.91	0
		1	49	28.88	28.97	28.92	0			1	24	28.66	28.65	28.72	0
		25	0	28.89	28.94	28.93	1			12	0	27.74	27.81	27.88	1
		25	12	27.65	27.82	27.77	1			12	6	27.66	27.75	27.79	1
		25	25	27.49	27.75	27.63	1			12	13	27.77	27.87	27.85	1
3M	QPSK	50	0	27.62	27.84	27.65	1			25	0	27.55	27.77	27.68	1
		1	0	28.34	28.45	28.26	1		16QAM	1	0	28.24	28.06	28.18	1
		1	24	27.64	27.90	27.71	1			1	12	28.00	27.83	27.93	1
		1	49	27.95	28.16	28.07	1			1	24	27.88	27.73	27.76	1
		25	0	26.50	26.81	26.62	2			12	0	26.88	26.88	26.87	2
	16QAM	25	12	26.47	26.75	26.64	2			12	6	26.80	26.81	26.86	2
		25	25	26.44	26.74	26.56	2			12	13	26.68	26.81	26.93	2
		50	0	26.38	26.82	26.68	2			25	0	26.45	26.72	26.85	2
		1	0	28.96	28.84	28.98	0			1	0	28.86	28.57	28.82	0
		1	7	28.74	28.65	28.86	0			1	2	28.71	28.47	28.78	0
1.4M	QPSK	1	14	28.66	28.63	28.83	0			1	5	28.73	28.45	28.71	0
		8	0	27.80	27.74	27.95	1			3	0	28.64	28.42	28.59	0
		8	3	27.63	27.71	27.87	1			3	1	28.82	28.65	28.81	0
		8	7	27.43	27.65	27.72	1			3	3	28.71	28.49	28.55	0
		15	0	27.31	27.68	27.79	1			6	0	27.80	27.62	27.72	1
	16QAM	1	0	28.20	28.02	28.11	1			1	0	27.92	27.86	28.03	1
		1	7	27.85	27.81	27.85	1			1	2	27.71	27.62	27.79	1
		1	14	27.72	27.77	27.77	1			1	5	27.72	27.76	27.94	1
		8	0	26.83	26.85	26.90	2			3	0	27.65	27.73	27.91	1
		8	3	26.57	26.74	26.79	2			3	1	27.56	27.71	27.88	1
		8	7	26.54	26.71	26.67	2			3	3	27.44	27.62	27.76	1
		15	0	26.37	26.68	26.55	2			6	0	26.36	26.63	26.70	2

*EIRP = Conducted + antenna gain (5.39dB)

LTE Band 25															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590				Channel		26115	26365	26615	
		Frequency (MHz)		1860.0	1882.5	1905.0				Frequency (MHz)		1857.5	1882.5	1907.5	
20M	QPSK	1	0	28.81	28.57	28.73	0	15M	QPSK	1	0	29.23	29.04	29.30	0
		1	50	28.64	28.48	28.63	0			1	37	28.44	28.25	28.59	0
		1	99	28.68	28.46	28.60	0			1	74	29.22	28.95	29.35	0
		50	0	27.94	27.65	27.77	1			36	0	28.08	27.91	28.28	1
		50	25	28.06	27.69	27.78	1			36	19	27.85	27.66	28.09	1
		50	50	28.01	27.68	27.68	1			36	39	27.86	27.77	28.12	1
		100	0	28.07	27.75	27.84	1			75	0	28.04	27.91	28.20	1
	16QAM	1	0	28.29	27.90	28.12	1		16QAM	1	0	28.61	28.52	28.68	1
		1	50	28.05	27.66	27.91	1			1	37	27.99	27.96	28.20	1
		1	99	28.23	27.79	28.06	1			1	74	28.33	28.25	28.44	1
10M	QPSK	50	0	27.02	26.63	26.80	2			36	0	26.85	26.73	26.99	2
		50	25	27.00	26.70	26.81	2			36	19	26.67	26.57	26.77	2
		50	50	26.86	26.58	26.74	2			36	39	26.76	26.62	26.92	2
		100	0	26.85	26.60	26.74	2			75	0	27.01	26.84	27.15	2
		1	0	29.10	28.95	29.23	0		QPSK	1	0	28.84	28.80	28.87	0
	16QAM	1	24	28.76	28.62	28.97	0			1	12	28.61	28.56	28.59	0
		1	49	28.65	28.53	28.98	0			1	24	28.81	28.68	28.72	0
		25	0	27.83	27.75	28.11	1			12	0	27.75	27.71	27.68	1
		25	12	27.79	27.64	27.92	1			12	6	27.54	27.60	27.55	1
		25	25	27.66	27.61	27.87	1			12	13	27.56	27.61	27.58	1
3M	QPSK	50	0	27.85	27.77	28.02	1			25	0	27.60	27.58	27.46	1
		1	0	28.23	28.20	28.32	1		16QAM	1	0	28.06	28.04	28.26	1
		1	24	27.59	27.62	27.80	1			1	12	27.98	28.00	28.20	1
		1	49	27.97	27.92	28.14	1			1	24	27.93	27.93	28.19	1
		25	0	26.85	26.81	27.07	2			12	0	26.59	26.64	26.95	2
	16QAM	25	12	26.64	26.63	26.81	2			12	6	26.55	26.66	27.00	2
		25	25	26.60	26.66	26.84	2			12	13	26.33	26.51	26.91	2
		50	0	26.82	26.83	26.92	2			25	0	26.52	26.69	27.01	2
		1	0	28.81	28.82	28.84	0		QPSK	1	0	28.64	28.52	28.76	0
		1	7	28.46	28.57	28.49	0			1	2	28.60	28.47	28.72	0
3M	QPSK	1	14	28.40	28.51	28.48	0			1	5	28.41	28.32	28.56	0
		8	0	27.39	27.46	27.44	1			3	0	28.42	28.35	28.60	0
		8	3	27.37	27.50	27.43	1			3	1	28.58	28.44	28.73	0
		8	7	27.35	27.51	27.36	1			3	3	28.62	28.48	28.72	0
		15	0	27.30	27.52	27.34	1			6	0	27.58	27.51	27.84	1
	16QAM	1	0	27.95	27.85	28.02	1		16QAM	1	0	28.32	27.76	28.22	1
		1	7	27.85	27.73	27.95	1			1	2	28.22	27.63	28.07	1
		1	14	27.63	27.55	27.78	1			1	5	28.20	27.55	27.97	1
		8	0	26.90	26.74	26.98	2			3	0	28.30	27.60	28.11	1
		8	3	26.71	26.52	26.68	2			3	1	28.18	27.56	28.14	1
		8	7	26.77	26.54	26.69	2			3	3	28.29	27.62	28.24	1
		15	0	26.77	26.63	26.76	2			6	0	27.51	26.81	27.37	2

*EIRP = Conducted + antenna gain (5.39dBi)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A




4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

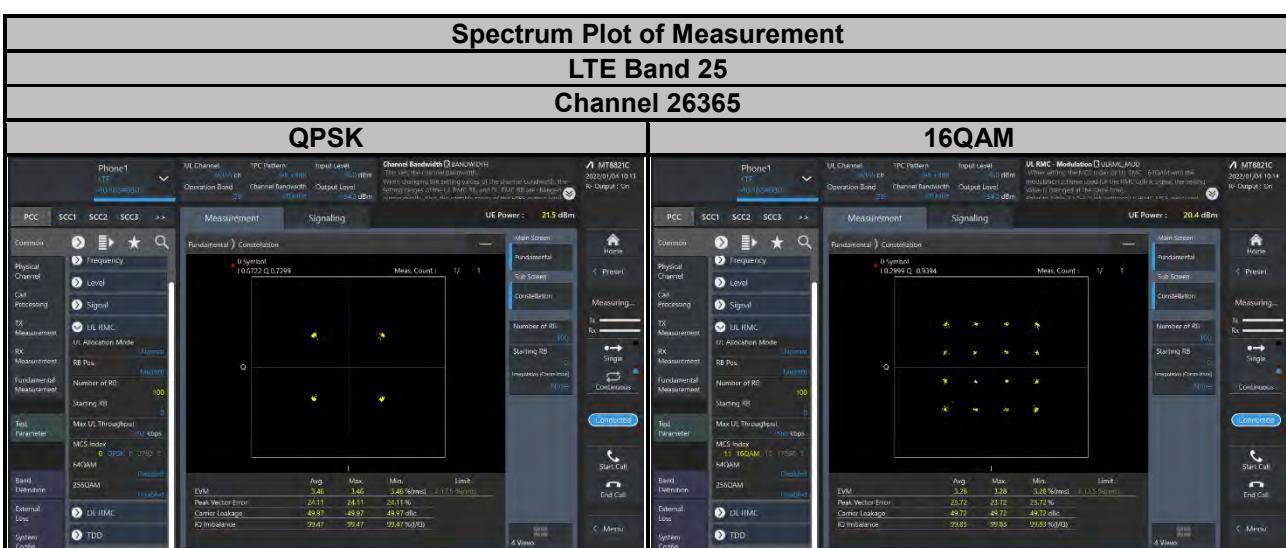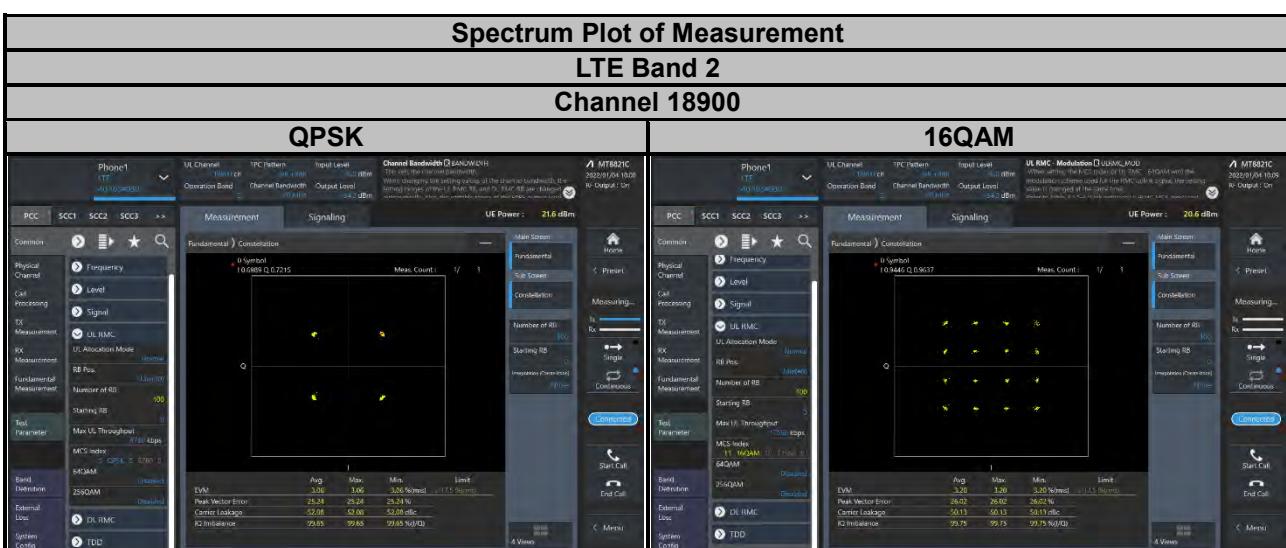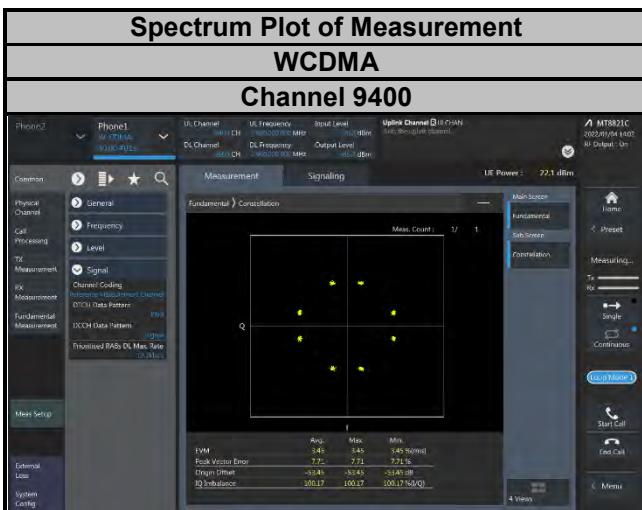

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

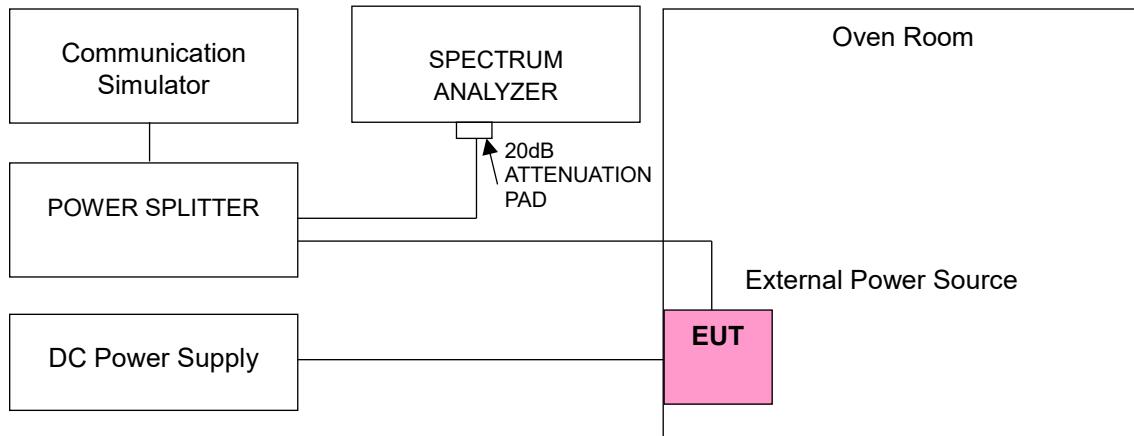

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1852.400004	0.002	1907.600002	0.001
10.2	1852.400003	0.002	1907.600001	0.001
13.8	1852.400002	0.001	1907.600002	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.400002	0.001	1907.600003	0.002
-20	1852.400002	0.001	1907.600003	0.002
-10	1852.400004	0.002	1907.600003	0.002
0	1852.400002	0.001	1907.600003	0.002
10	1852.400001	0.001	1907.600002	0.001
20	1852.399997	-0.002	1907.599998	-0.001
30	1852.399997	-0.002	1907.599997	-0.002
40	1852.399997	-0.002	1907.599999	-0.001
50	1852.399997	-0.001	1907.599999	-0.001
60	1852.399997	-0.002	1907.599998	-0.001
70	1852.399996	-0.002	1907.599998	-0.001
80	1852.399997	-0.002	1907.599998	-0.001

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1850.700002	0.001	1909.300000	0.001
10.2	1850.700003	0.002	1909.300002	0.001
13.8	1850.700004	0.002	1909.300004	0.002

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1850.700002	0.001	1909.300001	0.001
-20	1850.700004	0.002	1909.300002	0.001
-10	1850.700002	0.001	1909.300002	0.001
0	1850.700002	0.001	1909.300004	0.002
10	1850.700001	0.001	1909.300002	0.001
20	1850.699997	-0.002	1909.299997	-0.001
30	1850.699998	-0.001	1909.299996	-0.002
40	1850.699997	-0.002	1909.299997	-0.001
50	1850.699999	-0.001	1909.299996	-0.002
60	1850.699996	-0.002	1909.299997	-0.002
70	1850.699997	-0.002	1909.299997	-0.002
80	1850.699999	-0.001	1909.299997	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1851.500001	0.001	1908.500003	0.002
10.2	1851.500004	0.002	1908.500004	0.002
13.8	1851.500001	0.001	1908.500001	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1851.500003	0.002	1908.500004	0.002
-20	1851.500001	0.001	1908.500001	0.001
-10	1851.500002	0.001	1908.500004	0.002
0	1851.500004	0.002	1908.500003	0.002
10	1851.500002	0.001	1908.500002	0.001
20	1851.499998	-0.001	1908.499998	-0.001
30	1851.499997	-0.002	1908.499998	-0.001
40	1851.499999	-0.001	1908.499998	-0.001
50	1851.499998	-0.001	1908.499998	-0.001
60	1851.499998	-0.001	1908.499997	-0.002
70	1851.499998	-0.001	1908.499997	-0.002
80	1851.499999	-0.001	1908.499998	-0.001

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1852.500003	0.002	1907.500003	0.001
10.2	1852.500002	0.001	1907.500002	0.001
13.8	1852.500003	0.002	1907.500002	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1852.500003	0.001	1907.500001	0.001
-20	1852.500003	0.002	1907.500003	0.002
-10	1852.500004	0.002	1907.500002	0.001
0	1852.500001	0.001	1907.500002	0.001
10	1852.500002	0.001	1907.500003	0.002
20	1852.499997	-0.002	1907.499998	-0.001
30	1852.499998	-0.001	1907.499998	-0.001
40	1852.499998	-0.001	1907.499997	-0.001
50	1852.499997	-0.001	1907.499998	-0.001
60	1852.499998	-0.001	1907.499998	-0.001
70	1852.499996	-0.002	1907.499996	-0.002
80	1852.499999	-0.001	1907.499996	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1855.000004	0.002	1905.000004	0.002
10.2	1855.000004	0.002	1905.000003	0.001
13.8	1855.000003	0.001	1905.000001	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1855.000003	0.002	1905.000001	0.001
-20	1855.000002	0.001	1905.000001	0.001
-10	1855.000004	0.002	1905.000003	0.002
0	1855.000002	0.001	1905.000002	0.001
10	1855.000003	0.002	1905.000002	0.001
20	1854.999996	-0.002	1904.999998	-0.001
30	1854.999998	-0.001	1904.999997	-0.001
40	1854.999998	-0.001	1904.999998	-0.001
50	1854.999998	-0.001	1904.999997	-0.001
60	1854.999997	-0.002	1904.999998	-0.001
70	1854.999998	-0.001	1904.999998	-0.001
80	1854.999998	-0.001	1904.999996	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1857.500004	0.002	1902.500001	0.001
10.2	1857.500001	0.001	1902.500002	0.001
13.8	1857.500001	0.001	1902.500003	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1857.500001	0.001	1902.500003	0.002
-20	1857.500002	0.001	1902.500002	0.001
-10	1857.500002	0.001	1902.500003	0.001
0	1857.500003	0.002	1902.500002	0.001
10	1857.500001	0.001	1902.500004	0.002
20	1857.499997	-0.002	1902.499999	-0.001
30	1857.499997	-0.001	1902.499997	-0.001
40	1857.499996	-0.002	1902.499996	-0.002
50	1857.499997	-0.002	1902.499997	-0.001
60	1857.499998	-0.001	1902.499997	-0.001
70	1857.499997	-0.002	1902.499996	-0.002
80	1857.499999	-0.001	1902.499996	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1860.000004	0.002	1900.000002	0.001
10.2	1860.000003	0.001	1900.000003	0.001
13.8	1860.000002	0.001	1900.000002	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1860.000002	0.001	1900.000002	0.001
-20	1860.000002	0.001	1900.000002	0.001
-10	1860.000004	0.002	1900.000001	0.001
0	1860.000002	0.001	1900.000002	0.001
10	1860.000001	0.001	1900.000003	0.002
20	1859.999999	-0.001	1899.999997	-0.001
30	1859.999999	-0.001	1899.999998	-0.001
40	1859.999998	-0.001	1899.999996	-0.002
50	1859.999998	-0.001	1899.999997	-0.002
60	1859.999998	-0.001	1899.999997	-0.002
70	1859.999997	-0.002	1899.999998	-0.001
80	1859.999996	-0.002	1899.999996	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1850.700002	0.001	1914.300001	0.001
10.2	1850.700002	0.001	1914.300002	0.001
13.8	1850.700002	0.001	1914.300001	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1850.700002	0.001	1914.300001	0.001
-20	1850.700003	0.002	1914.300002	0.001
-10	1850.700001	0.001	1914.300003	0.001
0	1850.700002	0.001	1914.300003	0.001
10	1850.700001	0.001	1914.300002	0.001
20	1850.699999	-0.001	1914.299996	-0.002
30	1850.699998	-0.001	1914.299996	-0.002
40	1850.699998	-0.001	1914.299996	-0.002
50	1850.699999	-0.001	1914.299996	-0.002
60	1850.699999	-0.001	1914.299996	-0.002
70	1850.699997	-0.002	1914.299996	-0.002
80	1850.699996	-0.002	1914.299997	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1851.500002	0.001	1913.500001	0.001
10.2	1851.500004	0.002	1913.500003	0.002
13.8	1851.500004	0.002	1913.500003	0.002

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1851.500002	0.001	1913.500004	0.002
-20	1851.500004	0.002	1913.500004	0.002
-10	1851.500002	0.001	1913.500004	0.002
0	1851.500002	0.001	1913.500001	0.001
10	1851.500001	0.001	1913.500002	0.001
20	1851.499996	-0.002	1913.499997	-0.001
30	1851.499997	-0.002	1913.499998	-0.001
40	1851.499996	-0.002	1913.499999	-0.001
50	1851.499997	-0.002	1913.499998	-0.001
60	1851.499999	-0.001	1913.499996	-0.002
70	1851.499997	-0.002	1913.499997	-0.001
80	1851.499997	-0.002	1913.499996	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1852.500004	0.002	1912.500001	0.001
10.2	1852.500002	0.001	1912.500001	0.001
13.8	1852.500003	0.001	1912.500002	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1852.500001	0.001	1912.500002	0.001
-20	1852.500003	0.002	1912.500004	0.002
-10	1852.500004	0.002	1912.500001	0.001
0	1852.500001	0.001	1912.500002	0.001
10	1852.500002	0.001	1912.500003	0.002
20	1852.499998	-0.001	1912.499998	-0.001
30	1852.499998	-0.001	1912.499996	-0.002
40	1852.499996	-0.002	1912.499998	-0.001
50	1852.499998	-0.001	1912.499997	-0.002
60	1852.499997	-0.002	1912.499997	-0.002
70	1852.499998	-0.001	1912.499997	-0.002
80	1852.499999	-0.001	1912.499997	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1855.000002	0.001	1910.000002	0.001
10.2	1855.000002	0.001	1910.000003	0.002
13.8	1855.000004	0.002	1910.000002	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1855.000002	0.001	1910.000002	0.001
-20	1855.000002	0.001	1910.000003	0.001
-10	1855.000004	0.002	1910.000004	0.002
0	1855.000003	0.002	1910.000003	0.002
10	1855.000001	0.001	1910.000004	0.002
20	1854.999996	-0.002	1909.999998	-0.001
30	1854.999998	-0.001	1909.999998	-0.001
40	1854.999997	-0.002	1909.999997	-0.002
50	1854.999996	-0.002	1909.999998	-0.001
60	1854.999999	-0.001	1909.999997	-0.002
70	1854.999998	-0.001	1909.999998	-0.001
80	1854.999996	-0.002	1909.999998	-0.001

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1857.500002	0.001	1907.500004	0.002
10.2	1857.500003	0.002	1907.500002	0.001
13.8	1857.500002	0.001	1907.500002	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1857.500002	0.001	1907.500003	0.002
-20	1857.500004	0.002	1907.500003	0.001
-10	1857.500002	0.001	1907.500002	0.001
0	1857.500002	0.001	1907.500004	0.002
10	1857.500001	0.001	1907.500003	0.002
20	1857.499998	-0.001	1907.499996	-0.002
30	1857.499999	-0.001	1907.499997	-0.001
40	1857.499998	-0.001	1907.499998	-0.001
50	1857.499999	-0.001	1907.499998	-0.001
60	1857.499996	-0.002	1907.499999	-0.001
70	1857.499999	-0.001	1907.499997	-0.001
80	1857.499999	-0.001	1907.499996	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	1860.000002	0.001	1905.000003	0.002
10.2	1860.000003	0.002	1905.000001	0.001
13.8	1860.000003	0.002	1905.000004	0.002

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1860.000002	0.001	1905.000001	0.001
-20	1860.000001	0.001	1905.000004	0.002
-10	1860.000004	0.002	1905.000003	0.001
0	1860.000002	0.001	1905.000003	0.002
10	1860.000004	0.002	1905.000001	0.001
20	1859.999997	-0.001	1904.999998	-0.001
30	1859.999999	-0.001	1904.999996	-0.002
40	1859.999999	-0.001	1904.999998	-0.001
50	1859.999997	-0.001	1904.999998	-0.001
60	1859.999998	-0.001	1904.999999	-0.001
70	1859.999997	-0.002	1904.999998	-0.001
80	1859.999996	-0.002	1904.999997	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.


4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Measurement method, please refer to section 5.4.4 of ANSI C63.26. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

4.4.2 Test Setup




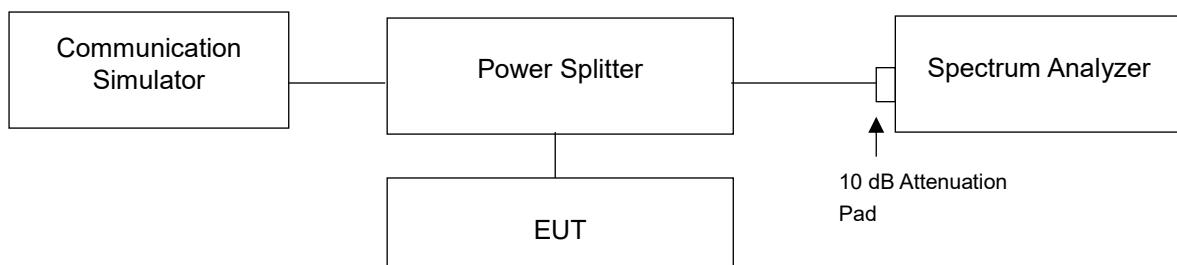


4.4.3 Test Result




WCDMA			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.15	4.73
9400	1880.0	4.16	4.73
9538	1907.6	4.15	4.72

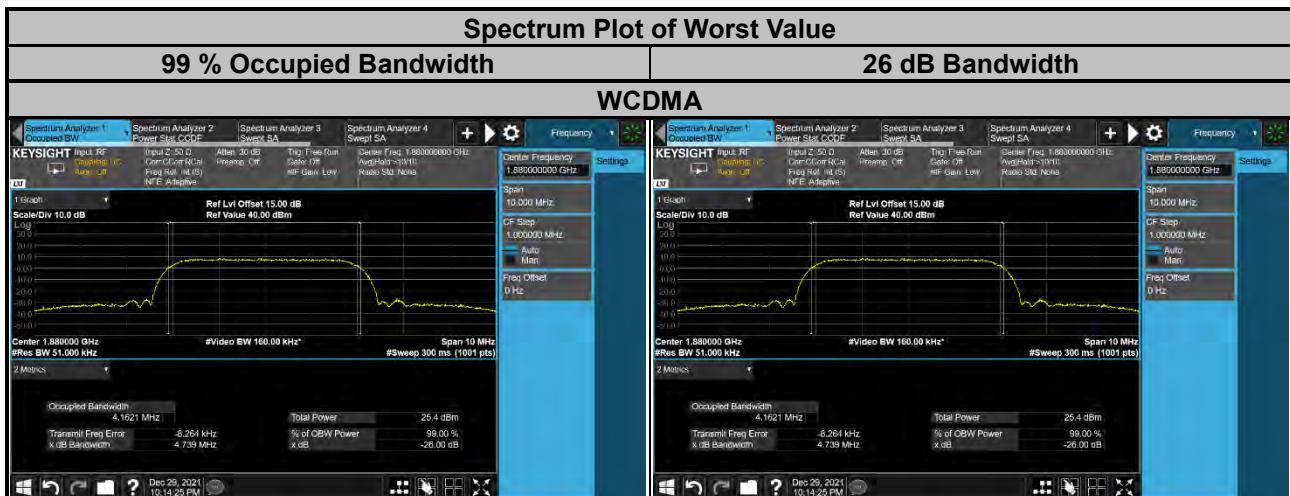


LTE Band 2					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18607	1850.7	1.09	1.09	1.23	1.22
18900	1880.0	1.09	1.09	1.23	1.22
19193	1909.3	1.09	1.09	1.24	1.22
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18615	1851.5	2.70	2.70	2.93	2.95
18900	1880.0	2.70	2.70	2.94	2.94
19185	1908.5	2.70	2.70	2.93	2.94

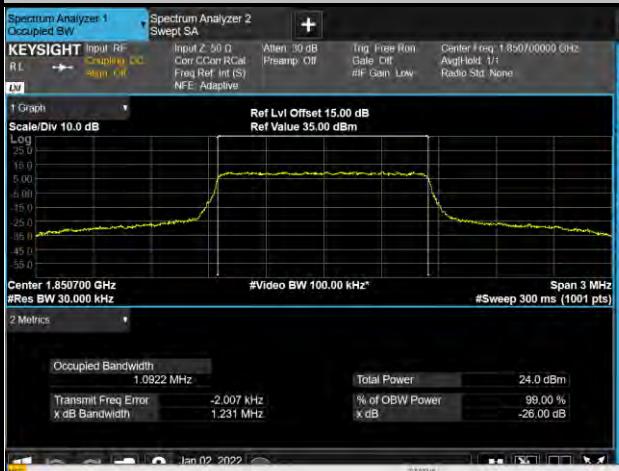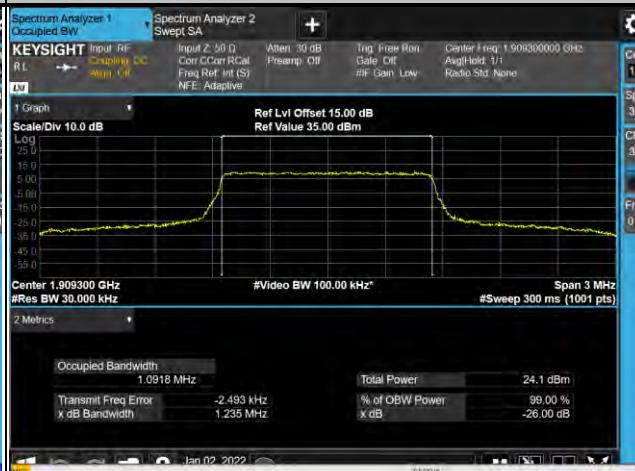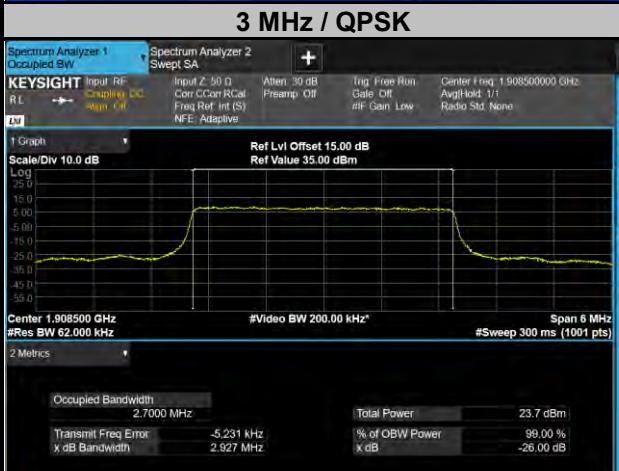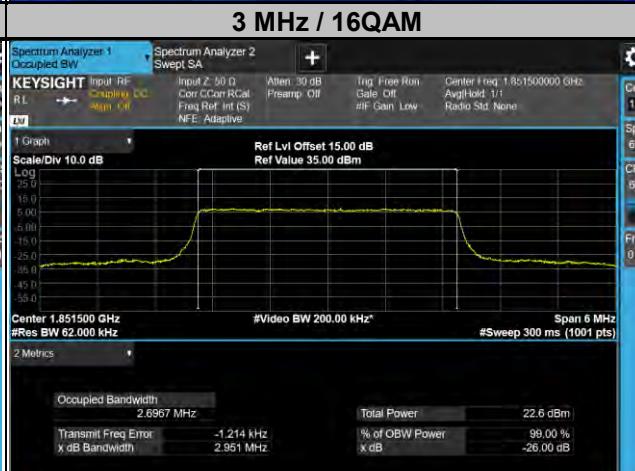Spectrum Plot of Worst Value					
99 % Occupied Bandwidth			26 dB Bandwidth		
1.4 MHz / QPSK			1.4 MHz / QPSK		
					
3 MHz / QPSK			3 MHz / 16QAM		
					


LTE Band 2					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18625	1852.5	4.49	4.49	4.87	4.82
18900	1880.0	4.49	4.49	4.86	4.82
19175	1907.5	4.49	4.49	4.85	4.82
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18650	1855.0	8.98	8.97	9.54	9.53
18900	1880.0	8.96	8.96	9.51	9.53
19150	1905.0	8.95	8.95	9.50	9.51

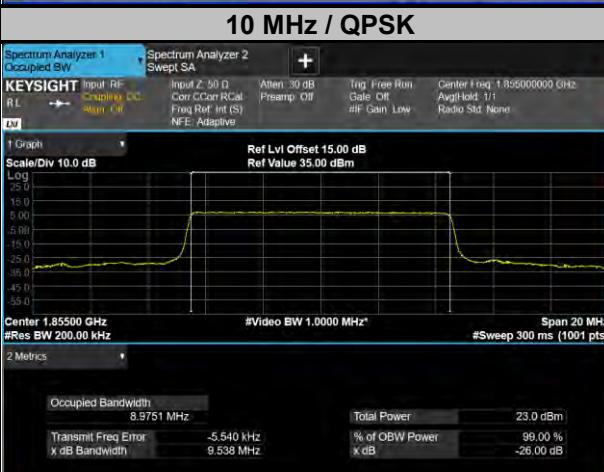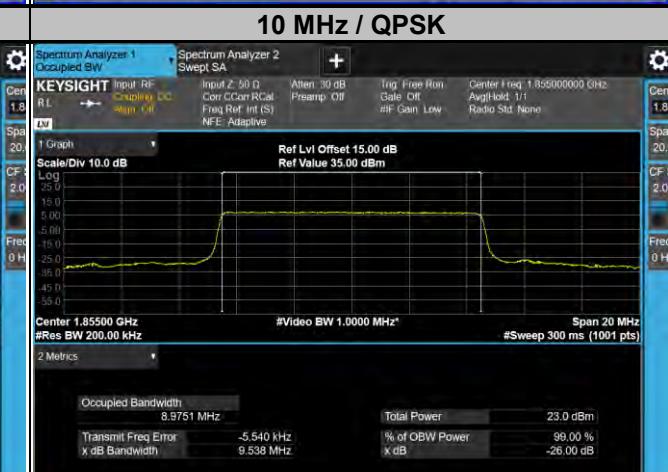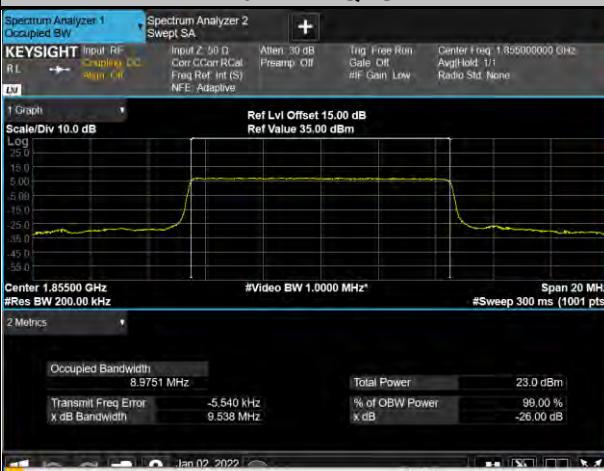Spectrum Plot of Worst Value					
99 % Occupied Bandwidth			26 dB Bandwidth		
5 MHz / QPSK			5 MHz / QPSK		
					
10 MHz / QPSK			10 MHz / QPSK		
					

LTE Band 2					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18675	1857.5	13.48	13.47	14.27	14.28
18900	1880.0	13.44	13.43	14.25	14.23
19125	1902.5	13.42	13.41	14.23	14.22
Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18700	1860.0	17.98	17.99	19.07	19.10
18900	1880.0	17.91	17.93	19.03	19.02
19100	1900.0	17.89	17.90	19.00	18.99

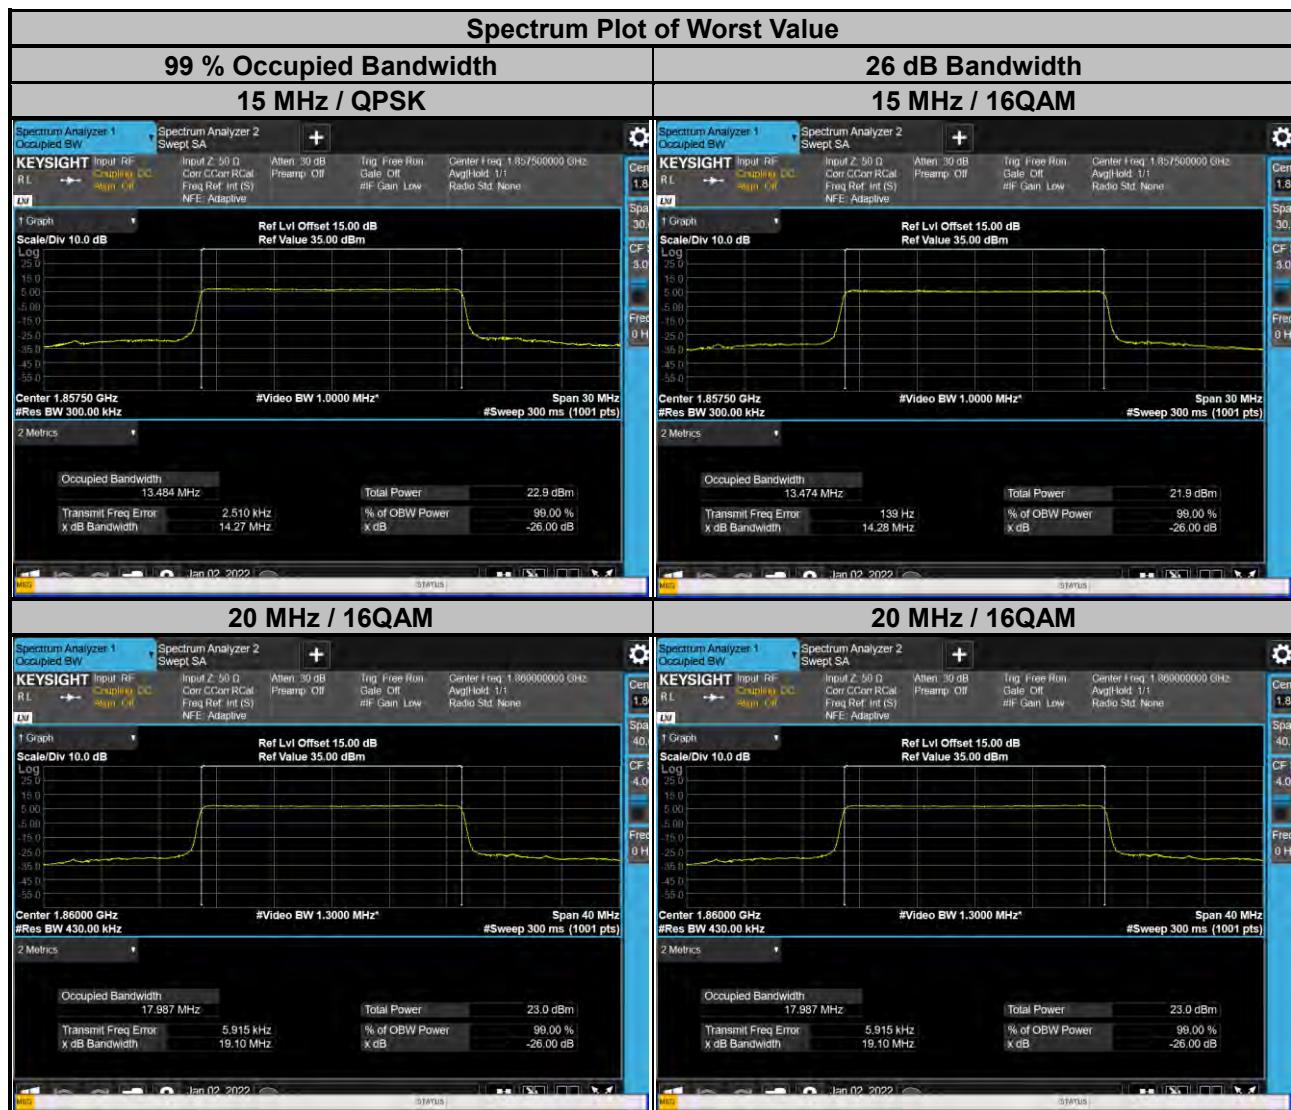

LTE Band 25					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26047	1850.7	1.09	1.09	1.24	1.23
26365	1882.5	1.09	1.09	1.24	1.22
26683	1914.3	1.10	1.09	1.31	1.24
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26055	1851.5	2.70	2.70	2.96	2.94
26365	1882.5	2.70	2.70	2.95	2.95
26675	1913.5	2.70	2.70	2.97	2.95

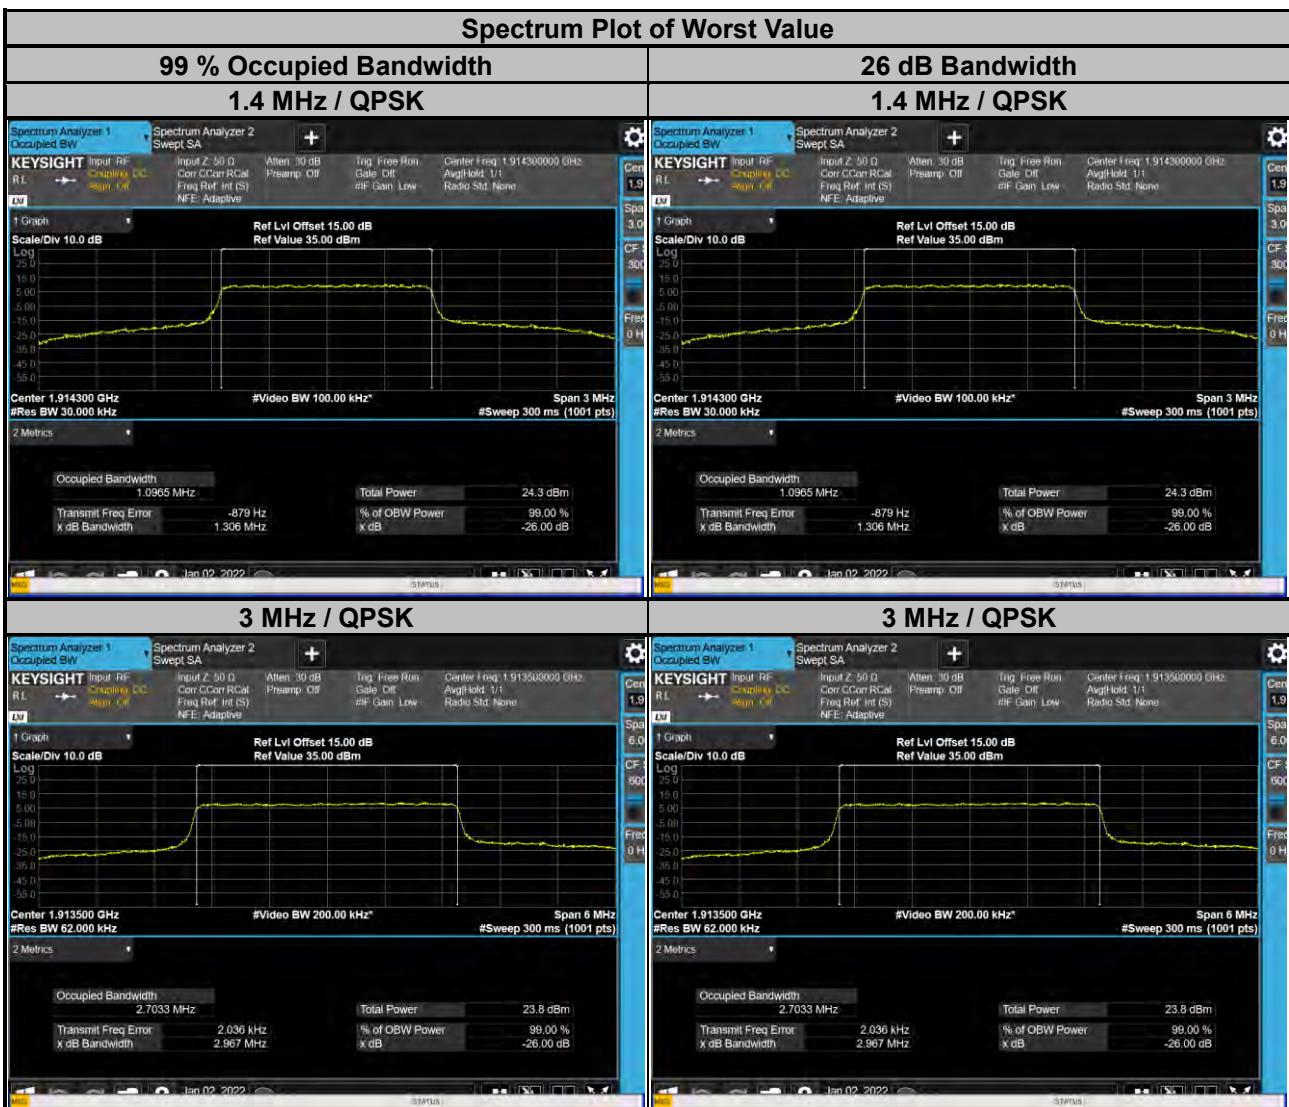

LTE Band 25


Channel Bandwidth: 5 MHz

Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26065	1852.5	4.50	4.49	4.86	4.83
26365	1882.5	4.50	4.49	4.86	4.82
26665	1912.5	4.50	4.50	4.88	4.84

Channel Bandwidth: 10 MHz

Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26090	1855.0	8.98	8.97	9.54	9.54
26365	1882.5	8.97	8.97	9.53	9.54
26640	1910.0	9.01	9.00	9.59	9.55

Spectrum Plot of Worst Value

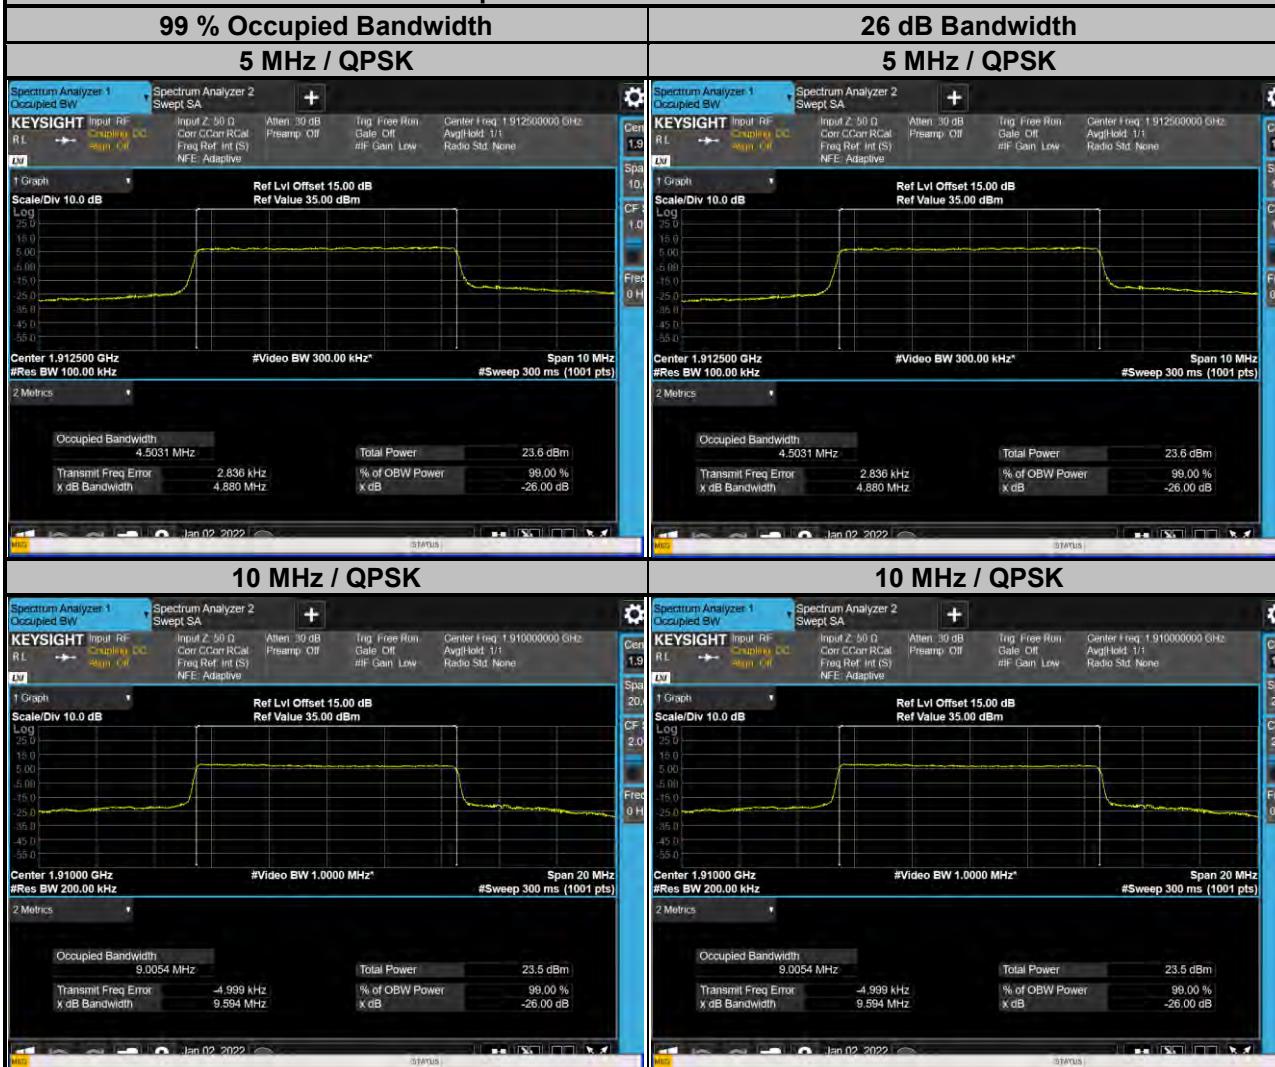

LTE Band 25					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26115	1857.5	13.49	13.47	14.28	14.28
26365	1882.5	13.46	13.45	14.27	14.25
26615	1907.5	13.49	13.47	14.29	14.28
Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26140	1860.0	17.99	17.99	19.08	19.07
26365	1882.5	17.93	17.94	19.05	19.04
26590	1905.0	17.93	17.93	19.05	19.03




4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



4.5.2 Test Setup

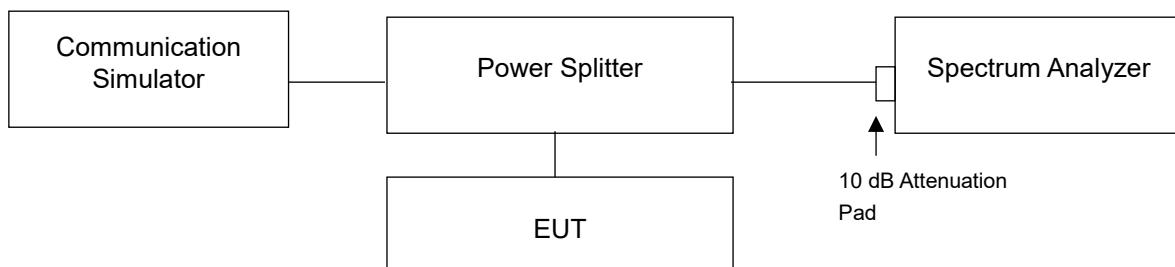



4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max trace plot into the test report.


4.5.4 Test Results

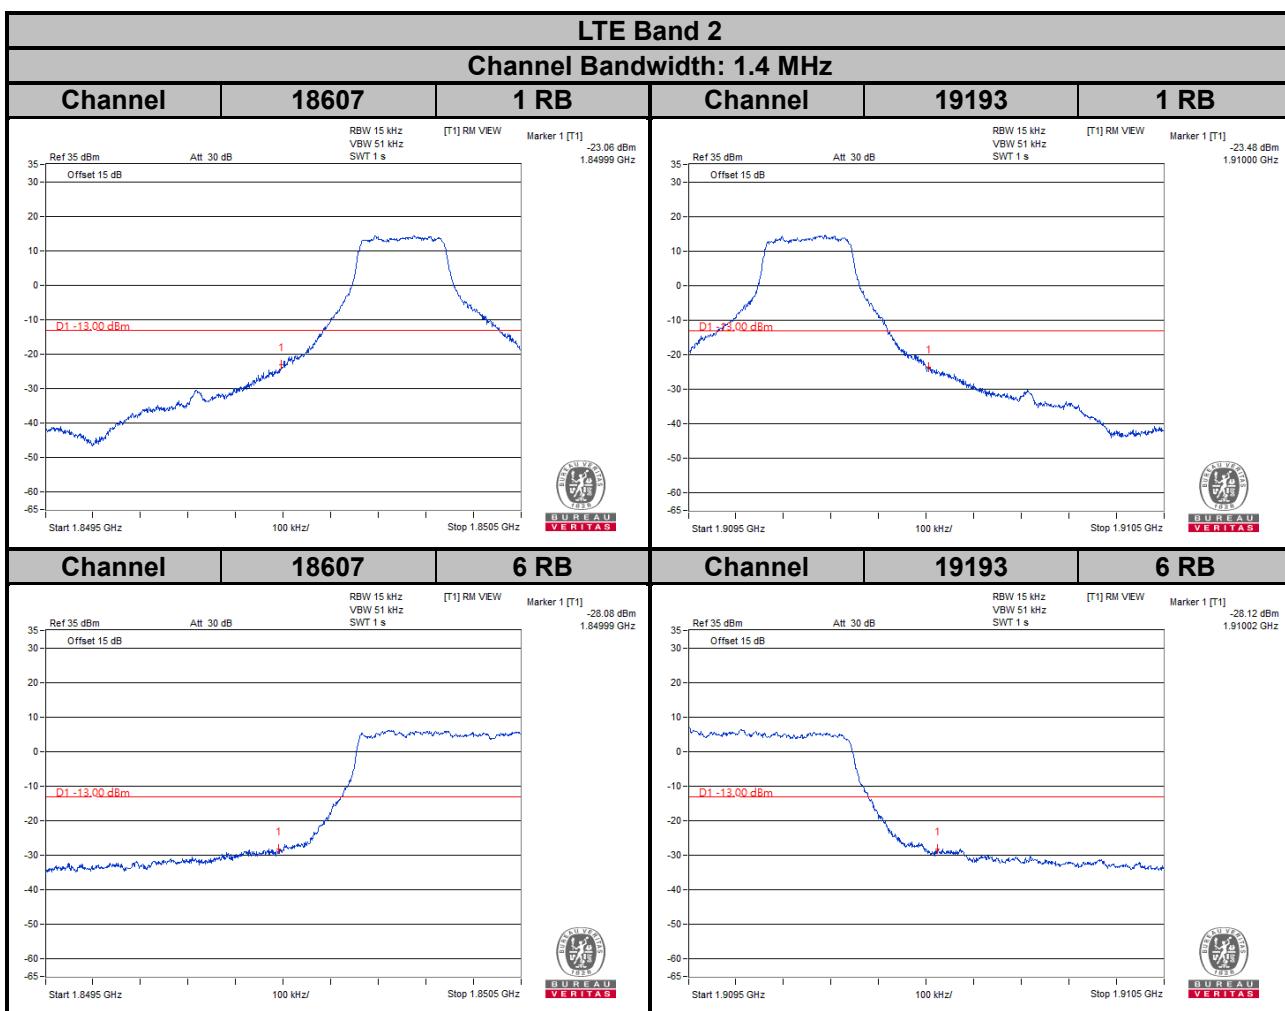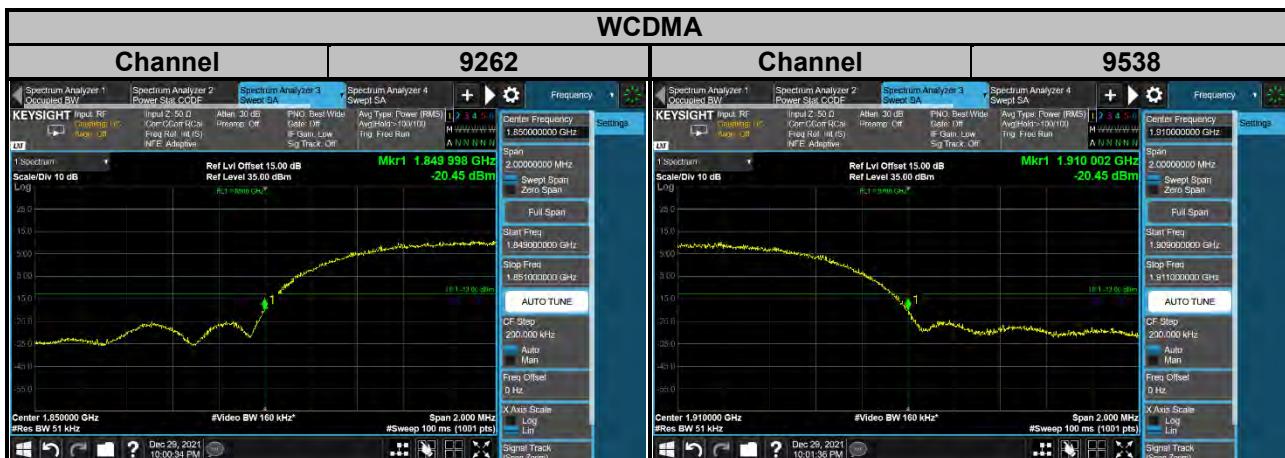


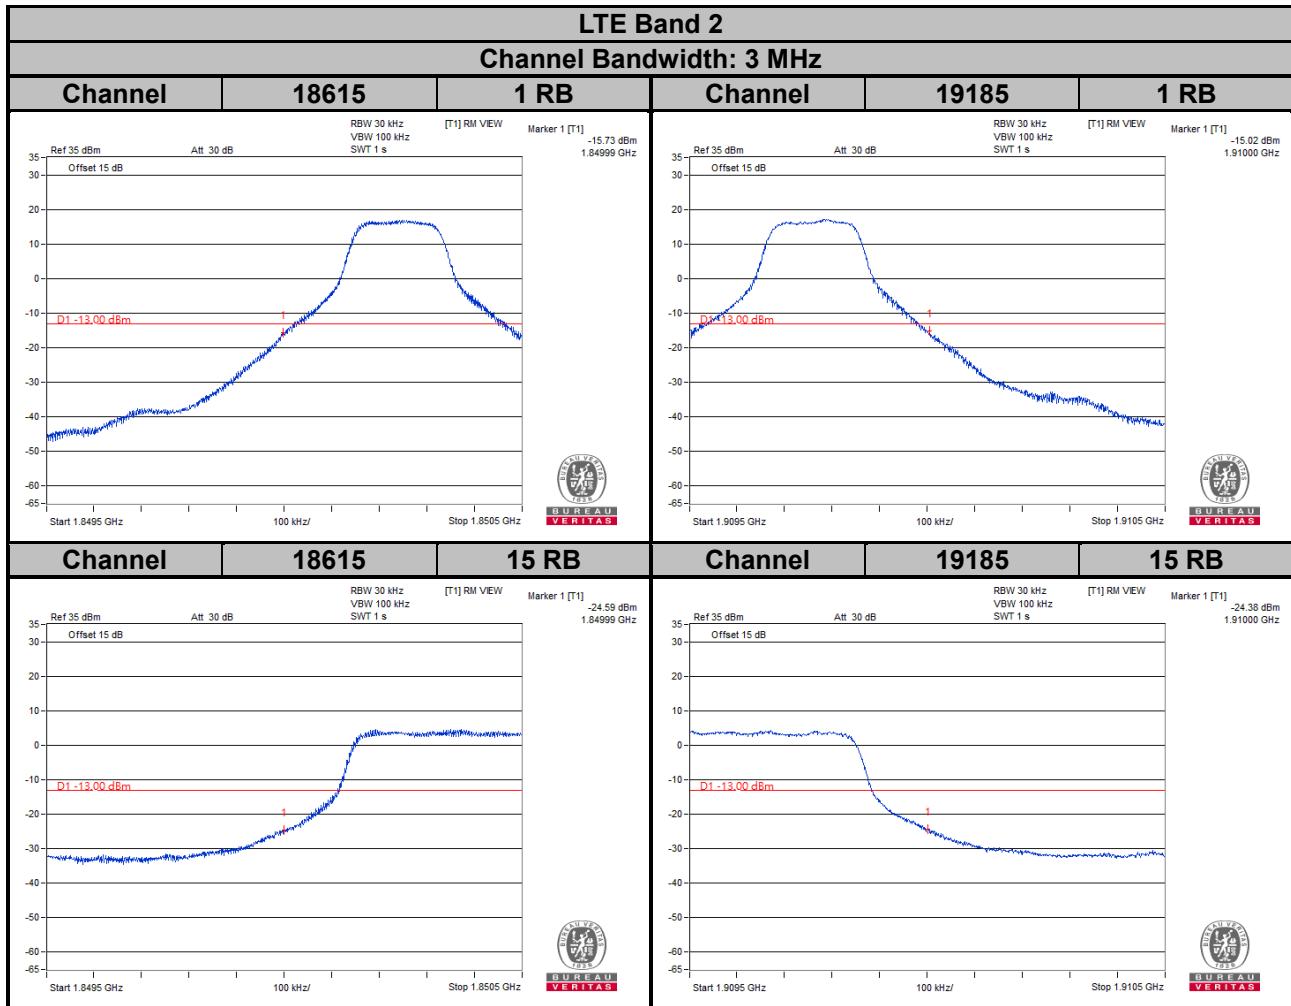


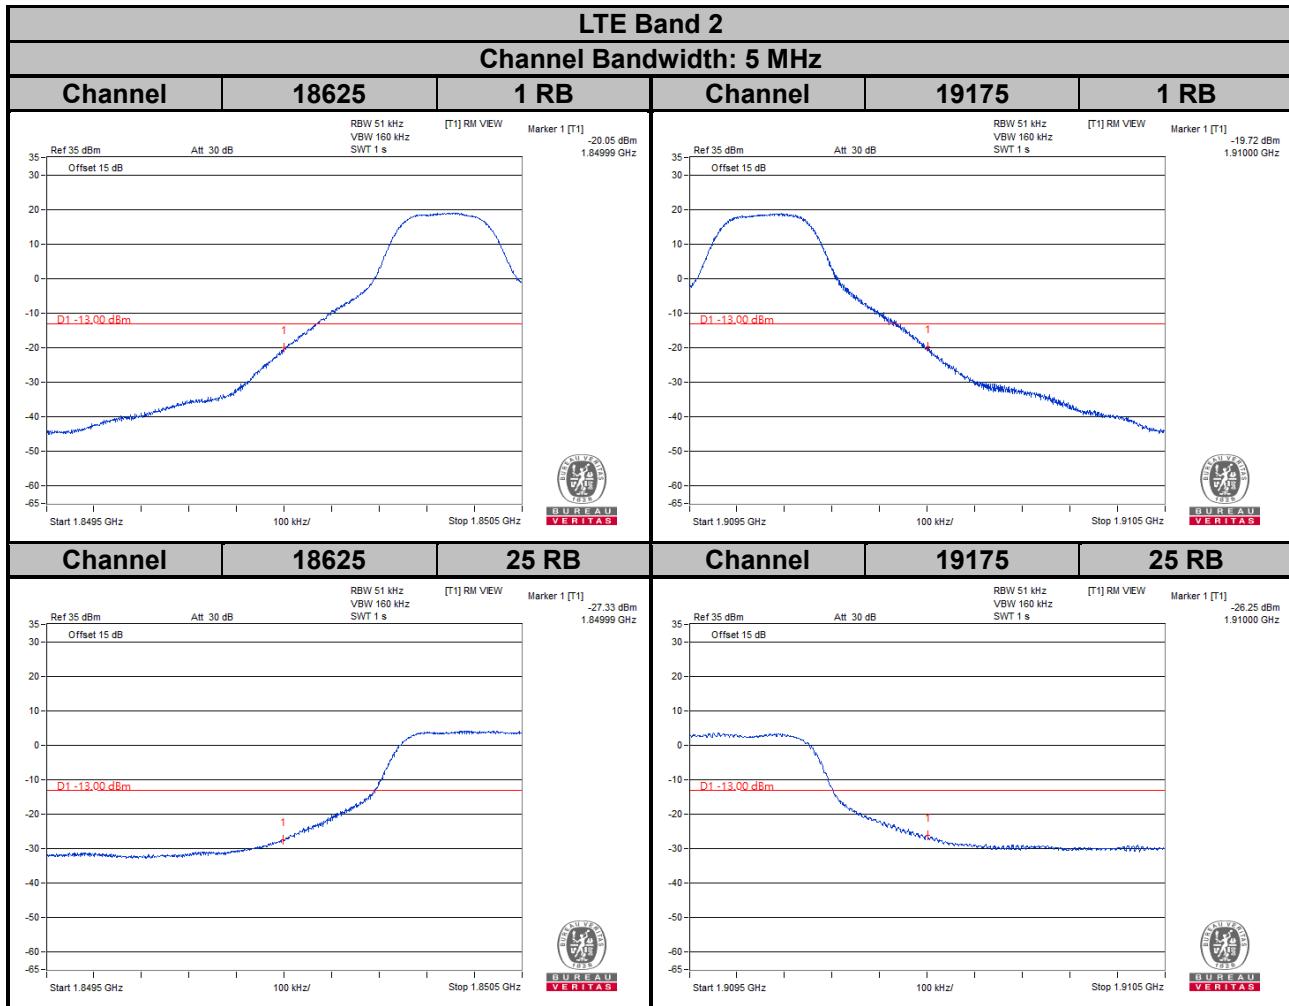


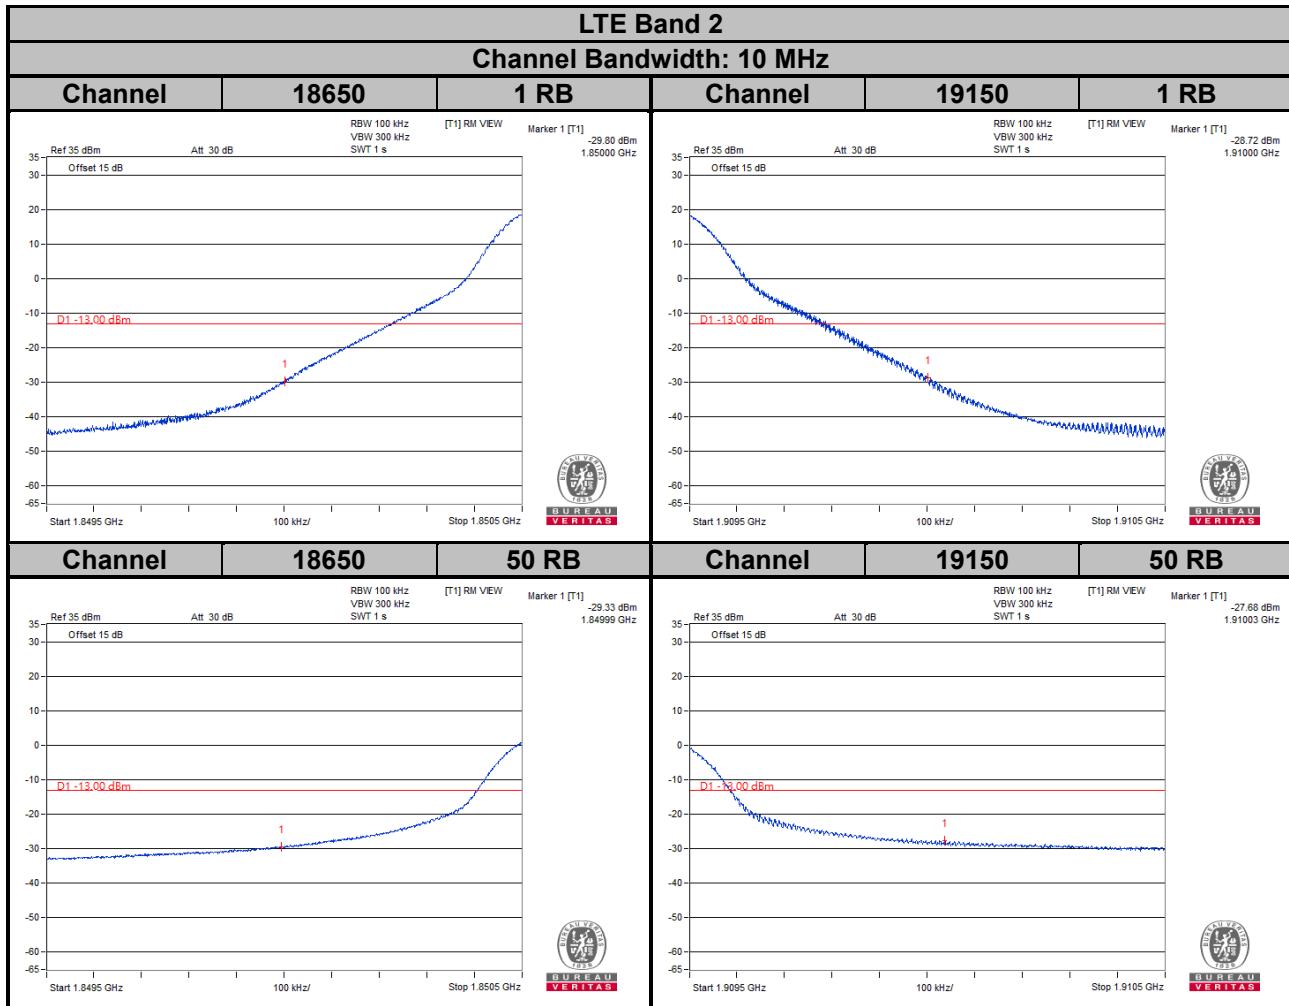


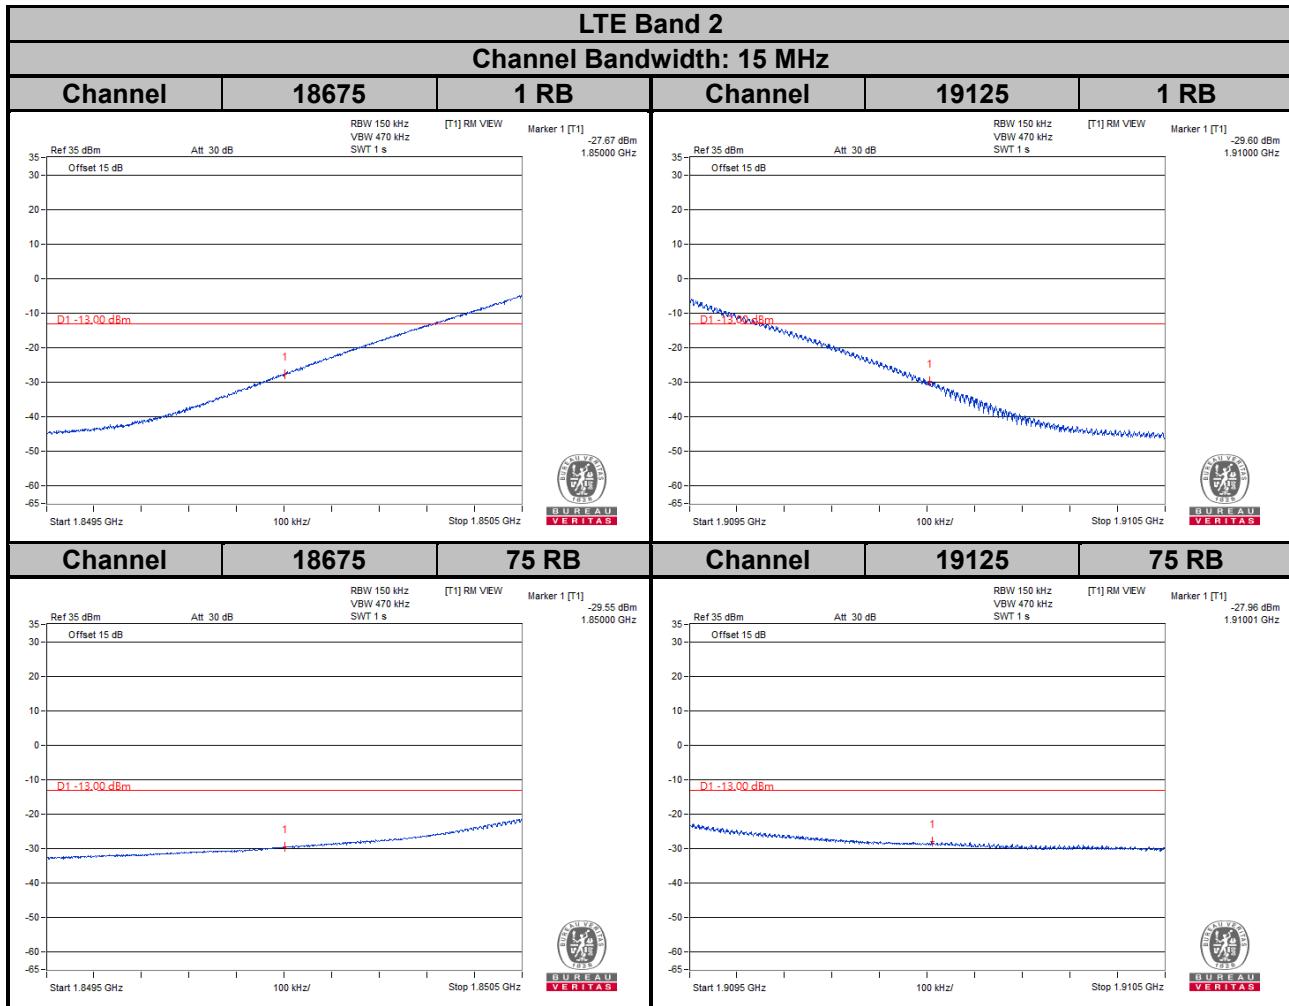


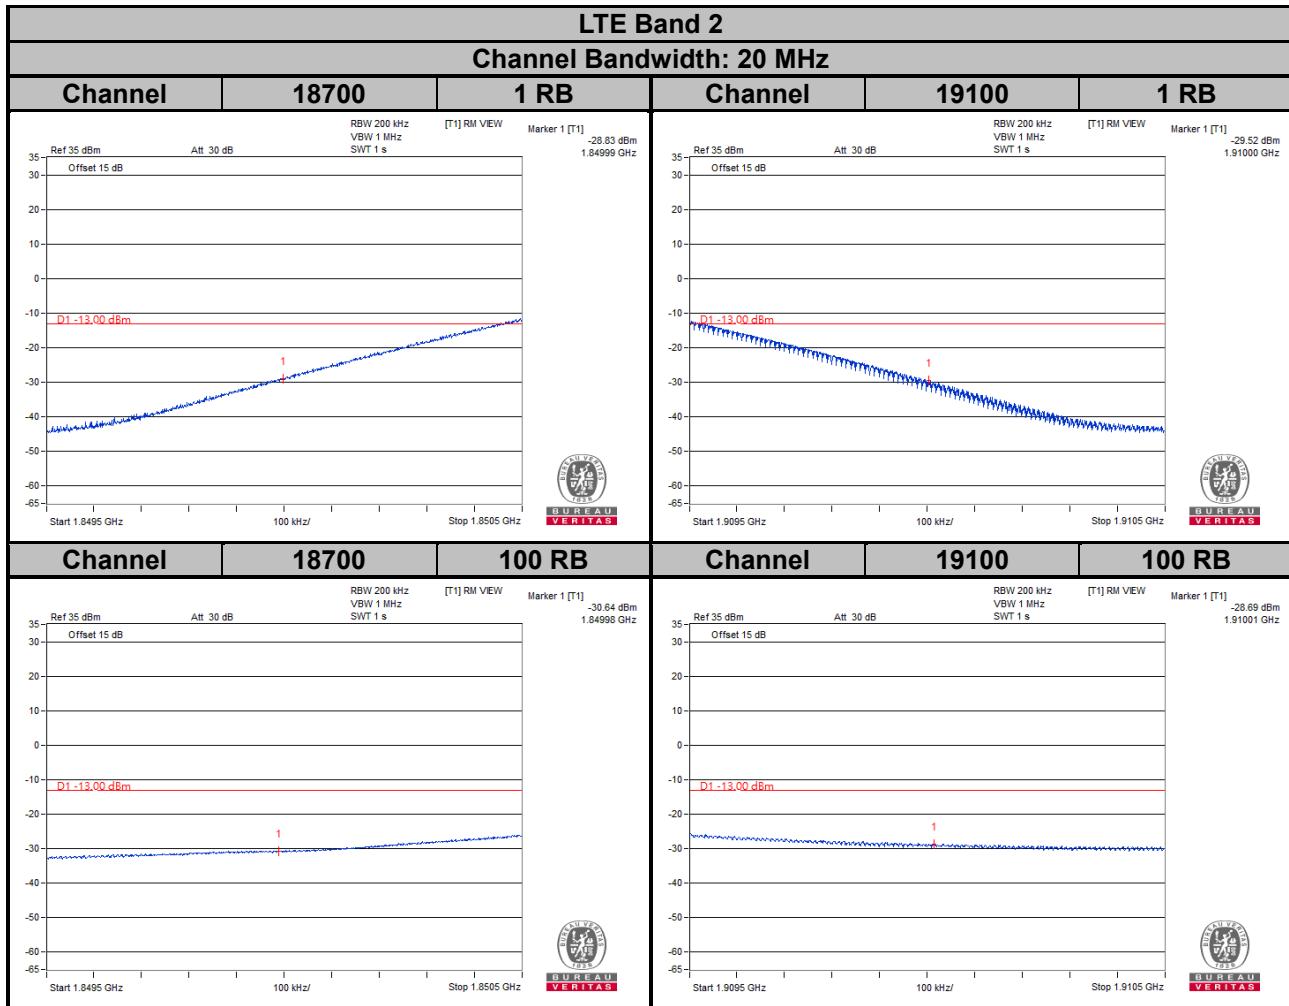


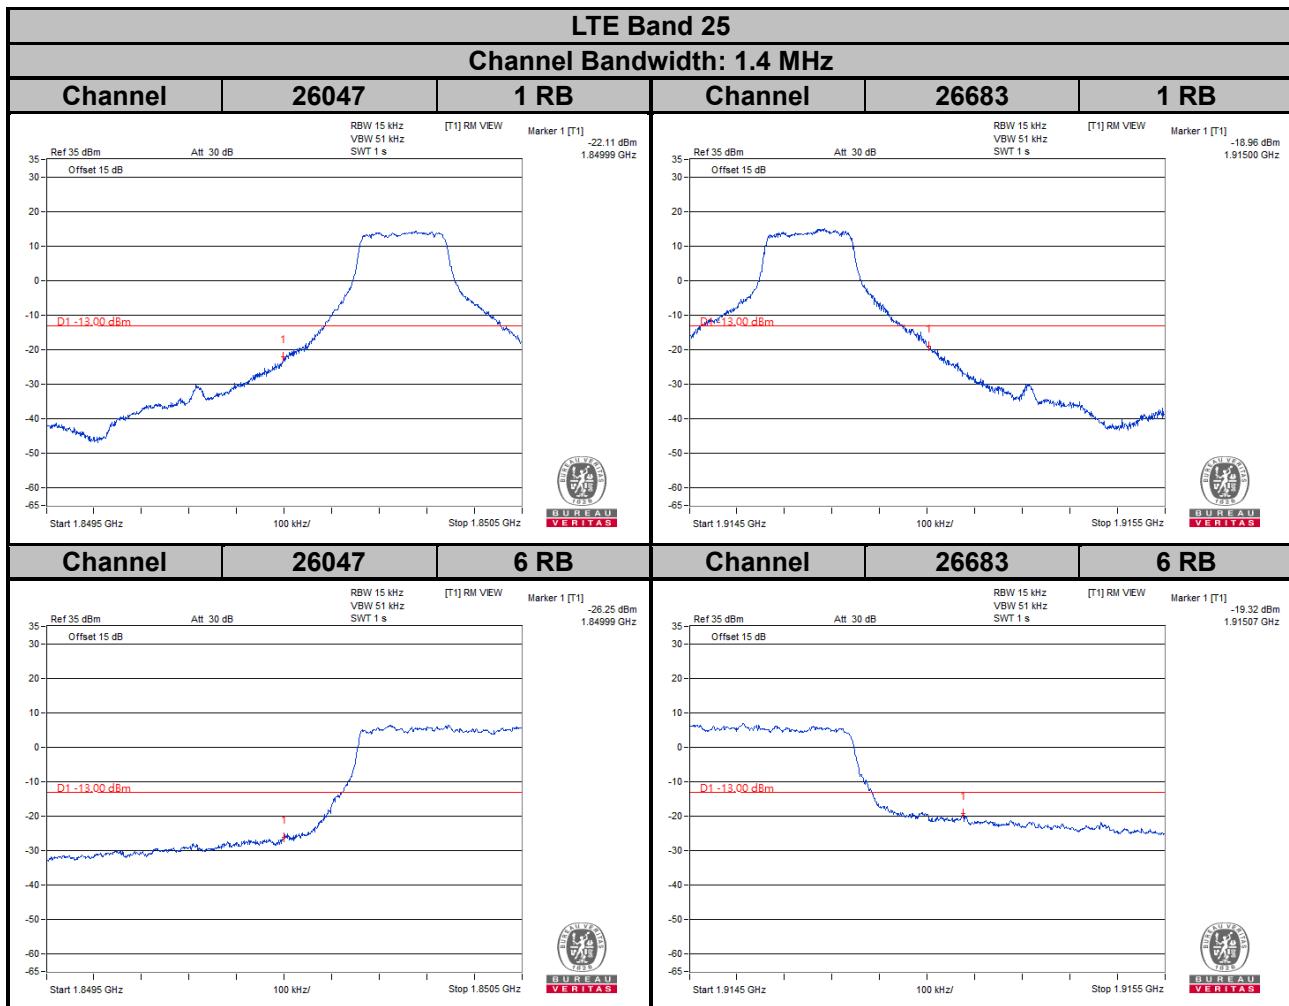

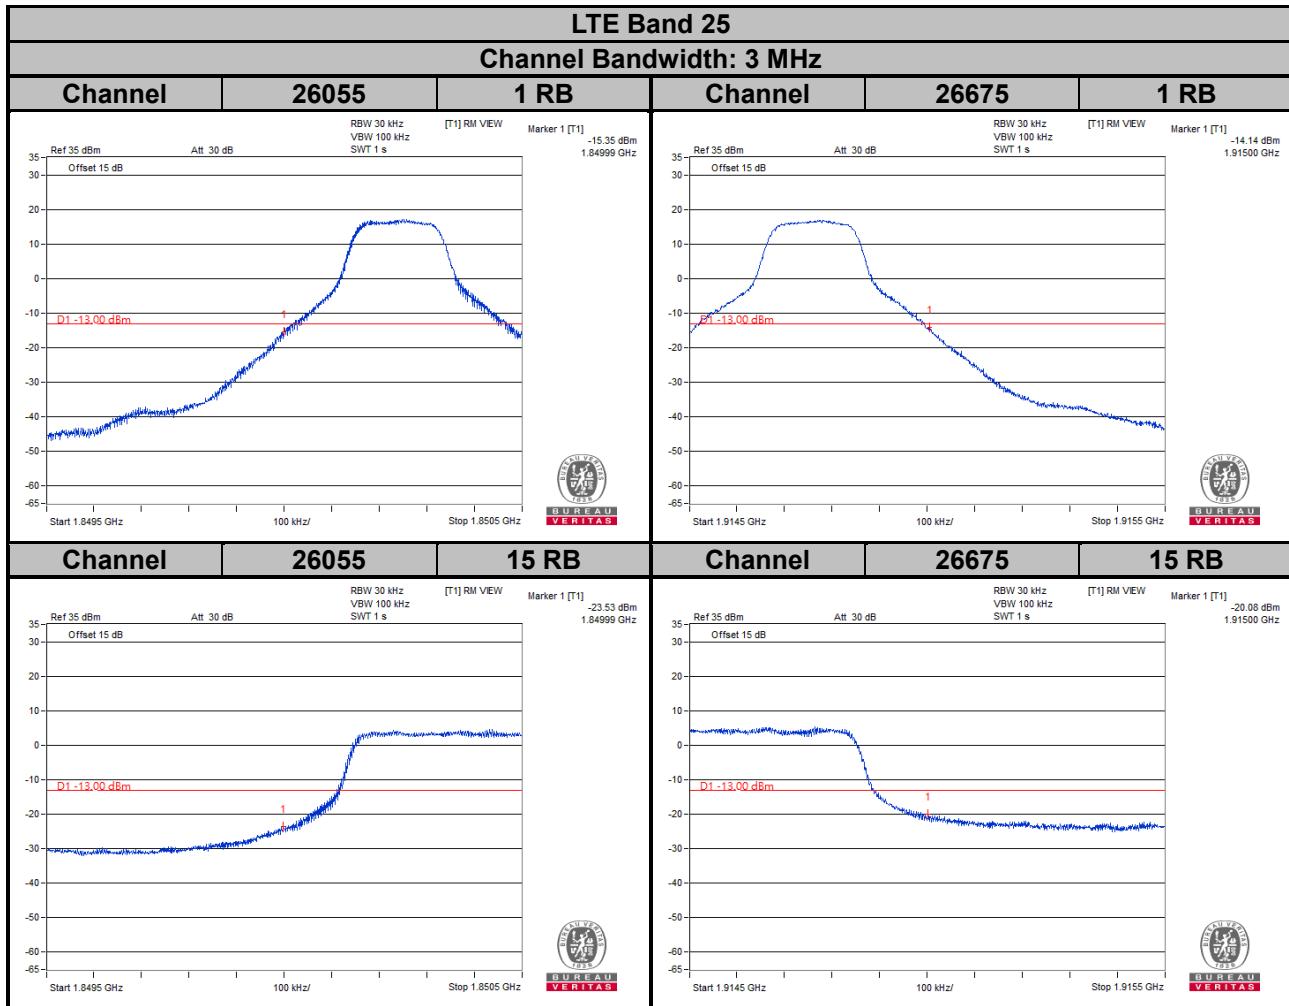

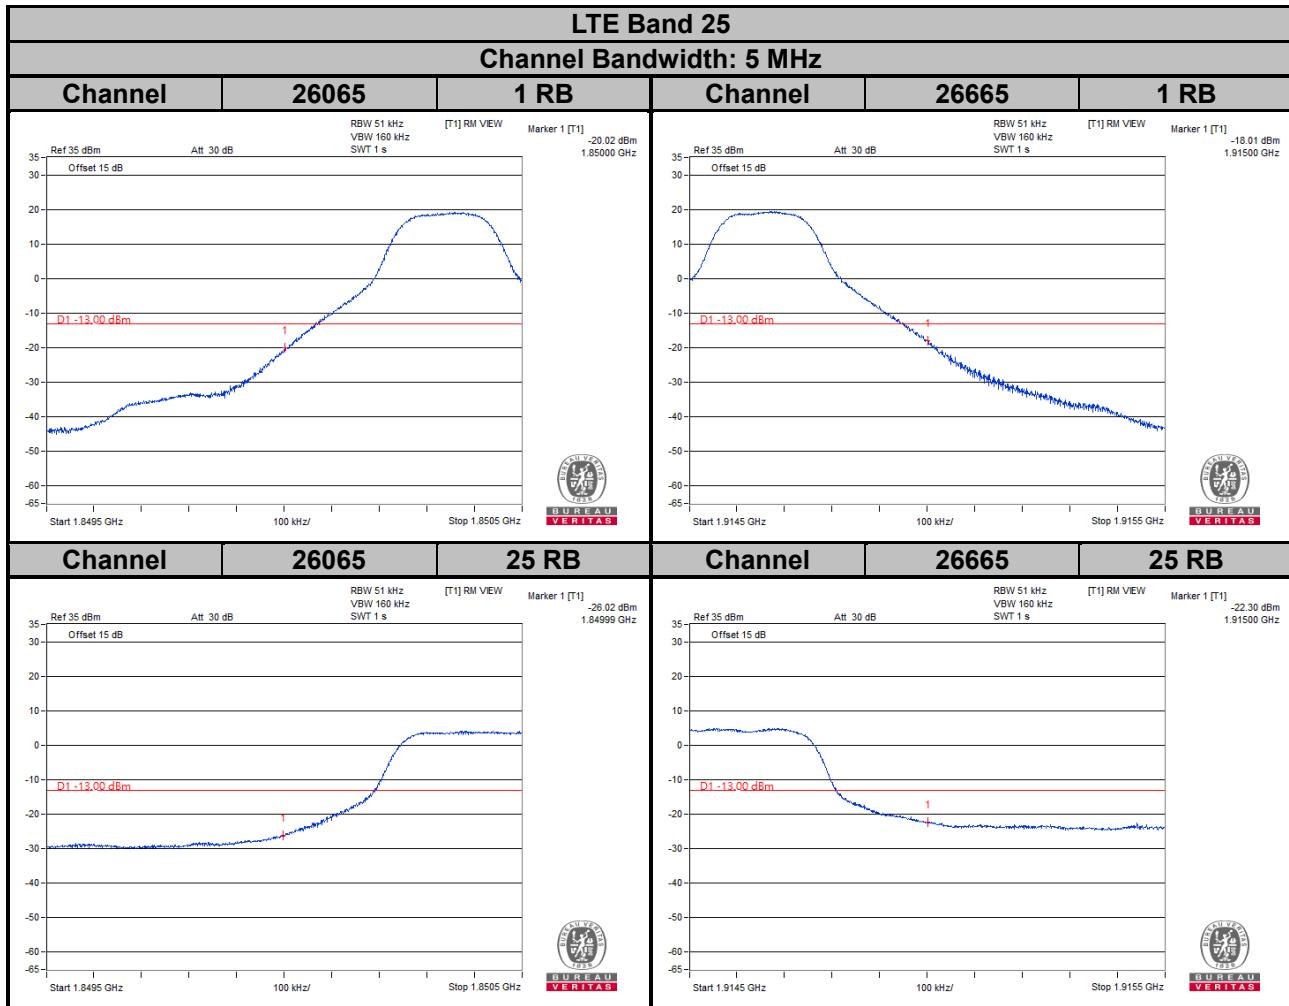




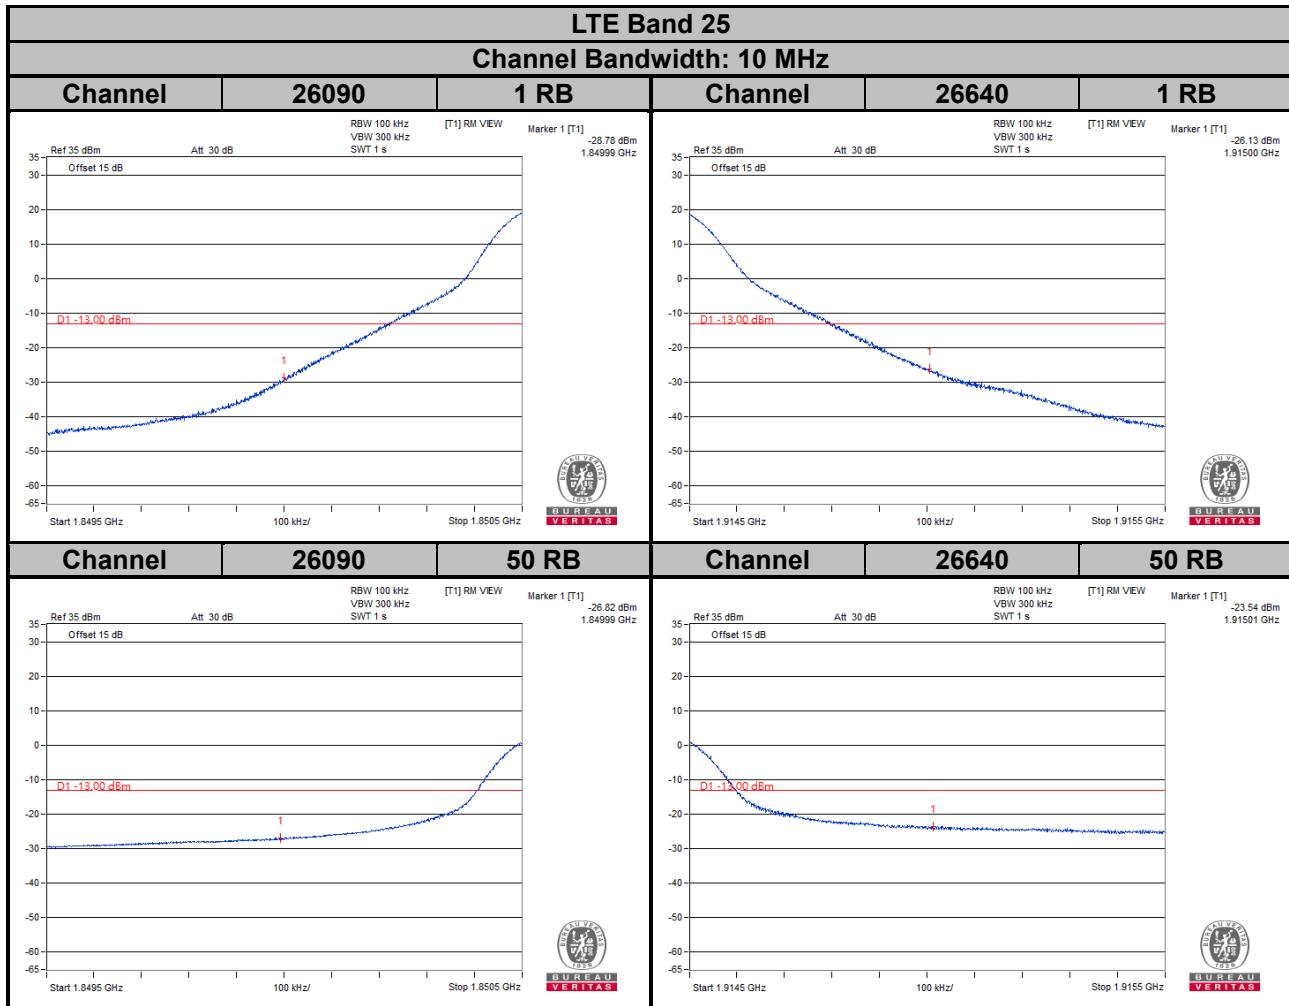


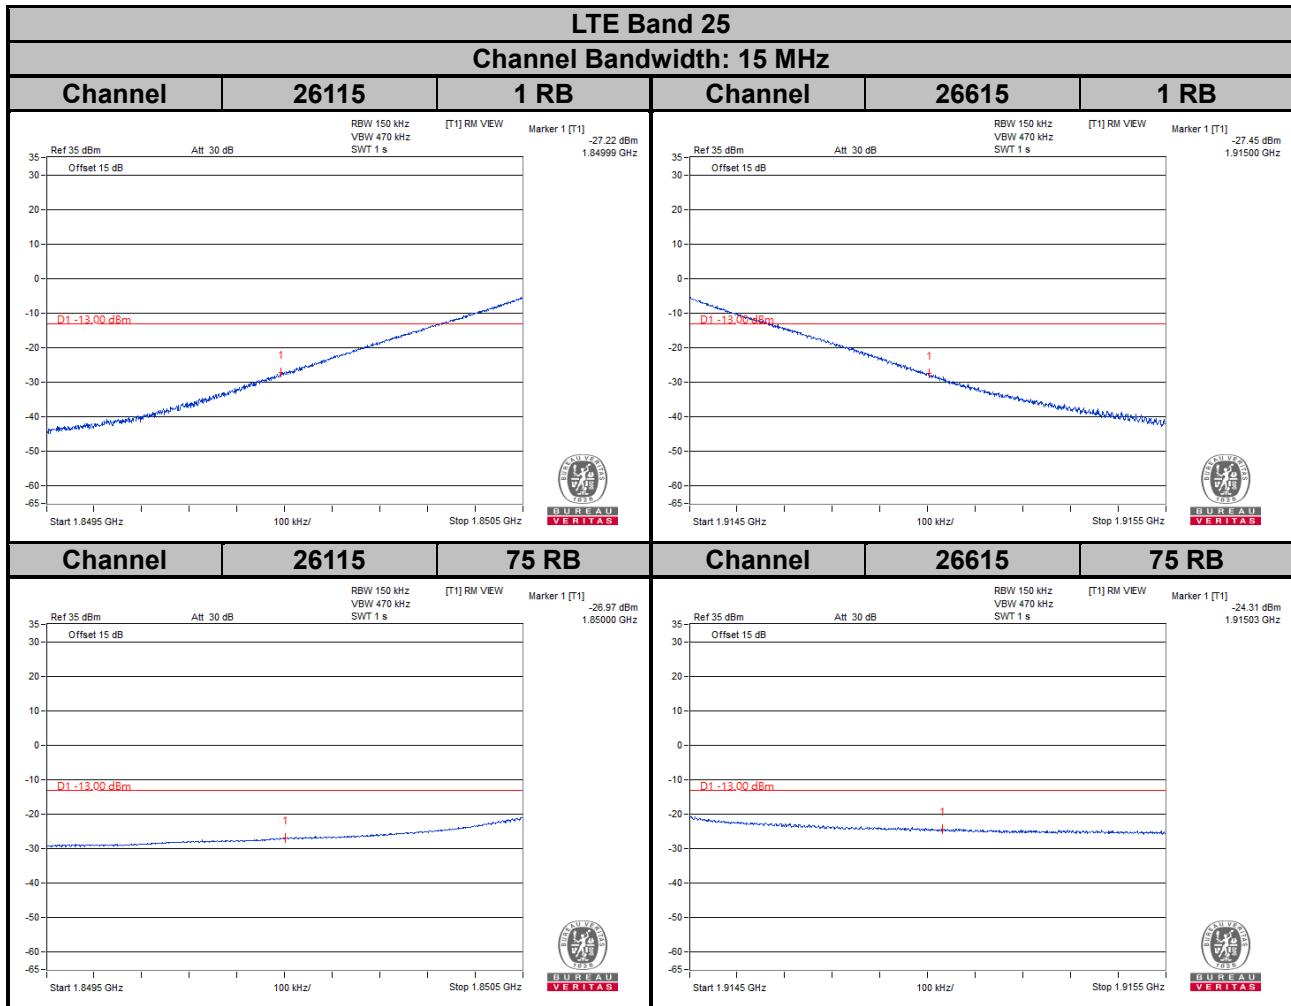



LTE Band 25

Channel Bandwidth: 20 MHz

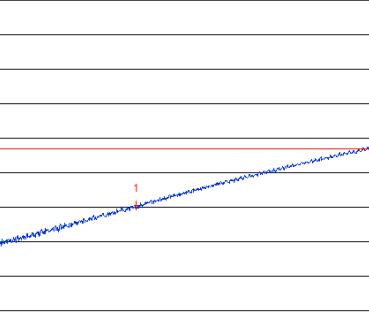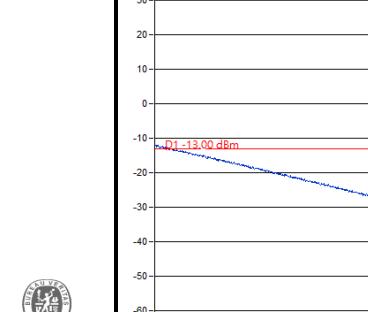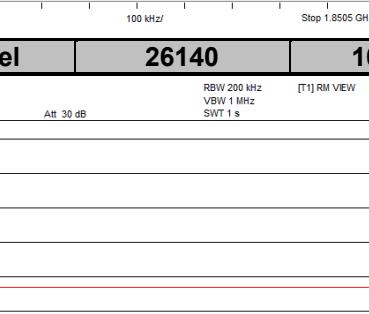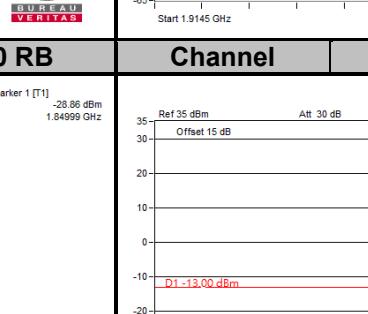
Channel	26140	1 RB	Channel	26590	1 RB
					

4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

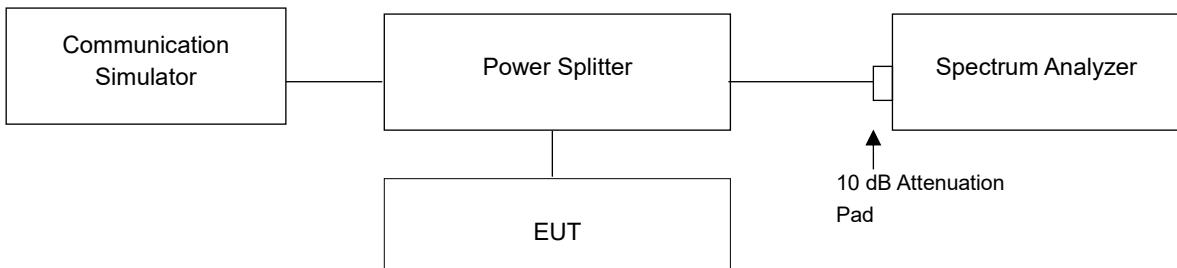

4.6.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
9262	1852.4	2.84
9400	1880.0	2.77
9538	1907.6	2.83



LTE Band 2							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	3.50	4.23	18615	1851.5	3.28	4.07
18900	1880.0	3.50	4.20	18900	1880.0	3.29	4.01
19193	1909.3	3.40	4.12	19185	1908.5	3.16	3.91




LTE Band 2							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	3.23	4.02	18650	1855.0	3.21	3.94
18900	1880.0	3.34	4.02	18900	1880.0	3.28	4.02
19175	1907.5	3.07	3.90	19150	1905.0	3.37	4.18

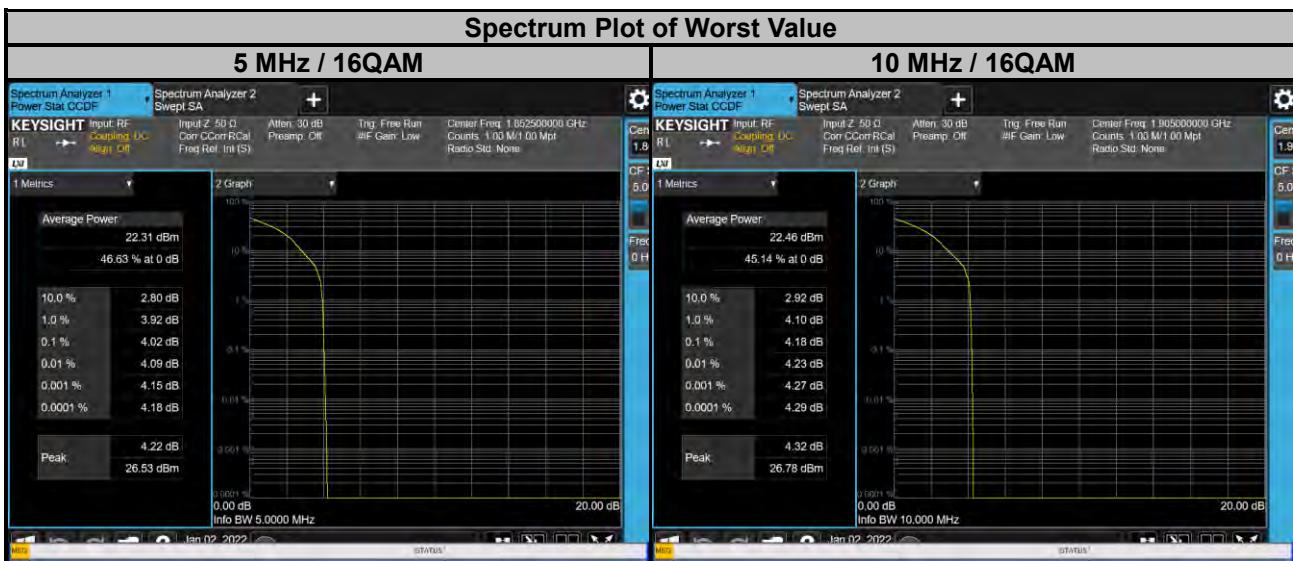

LTE Band 2							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	3.16	3.86	18700	1860.0	3.15	3.81
18900	1880.0	3.27	3.97	18900	1880.0	3.34	4.06
19125	1902.5	3.36	4.11	19100	1900.0	3.26	3.93



LTE Band 25							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
26047	1850.7	3.31	4.03	26055	1851.5	3.13	3.86
26365	1882.5	3.34	4.04	26365	1882.5	3.12	3.86
26683	1914.3	3.39	4.15	26675	1913.5	3.27	4.03

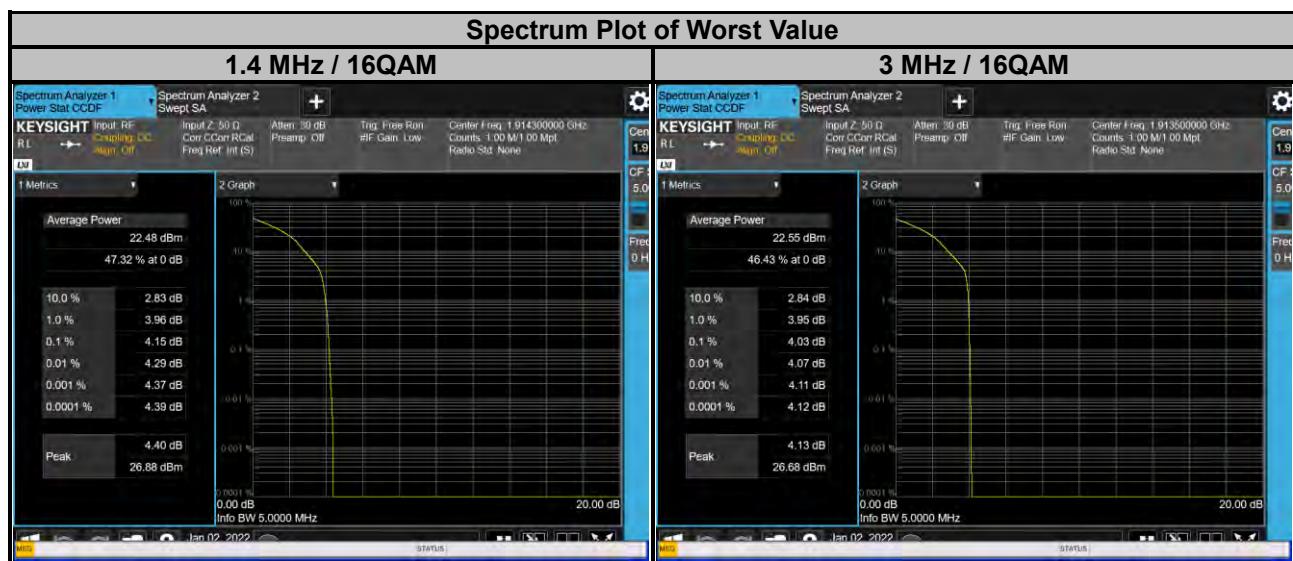


LTE Band 25							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
26065	1852.5	3.18	3.84	26090	1855.0	3.04	3.79
26365	1882.5	3.10	3.86	26365	1882.5	3.03	3.81
26665	1912.5	3.19	3.92	26640	1910.0	2.91	3.64



LTE Band 25

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
26115	1857.5	3.13	3.83	26140	1860.0	3.19	3.85
26365	1882.5	3.13	3.82	26365	1882.5	3.25	3.98
26615	1907.5	3.18	3.94	26590	1905.0	3.42	4.19

Spectrum Plot of Worst Value

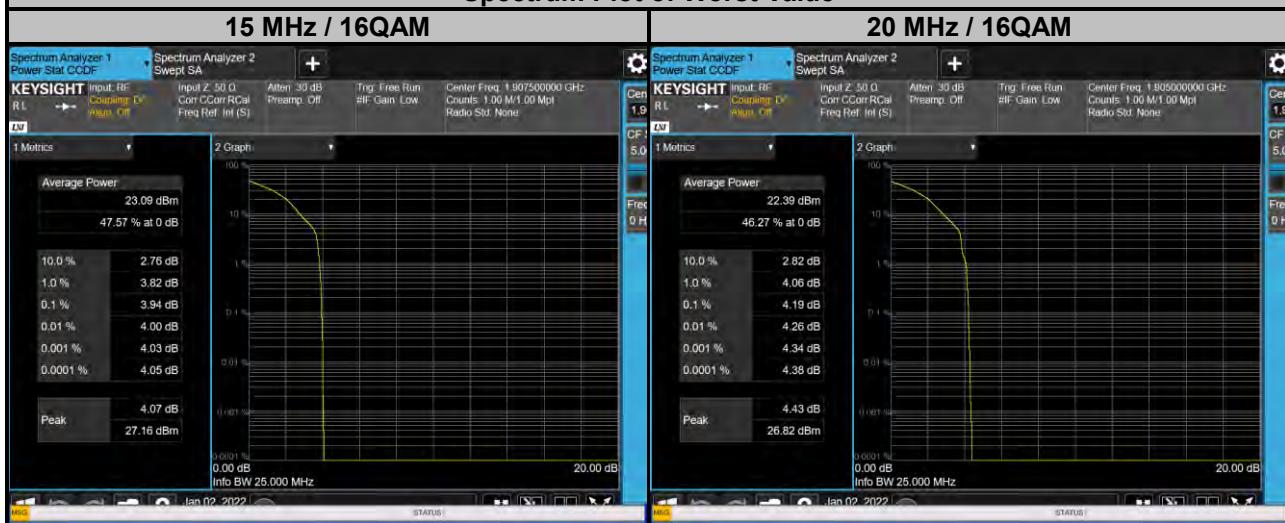


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

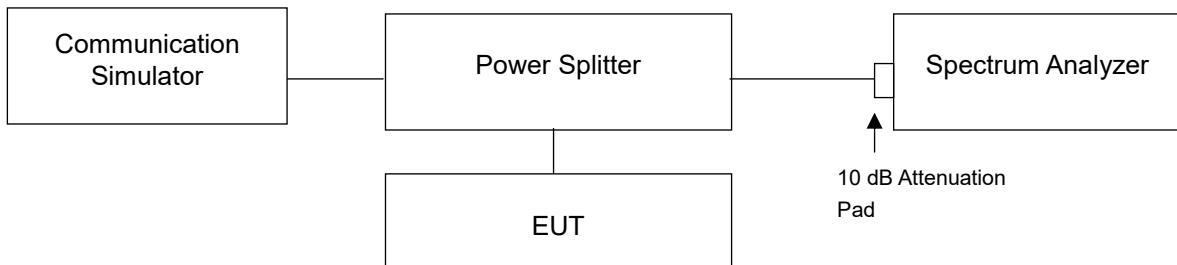


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 20 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.


4.7.4 Test Results

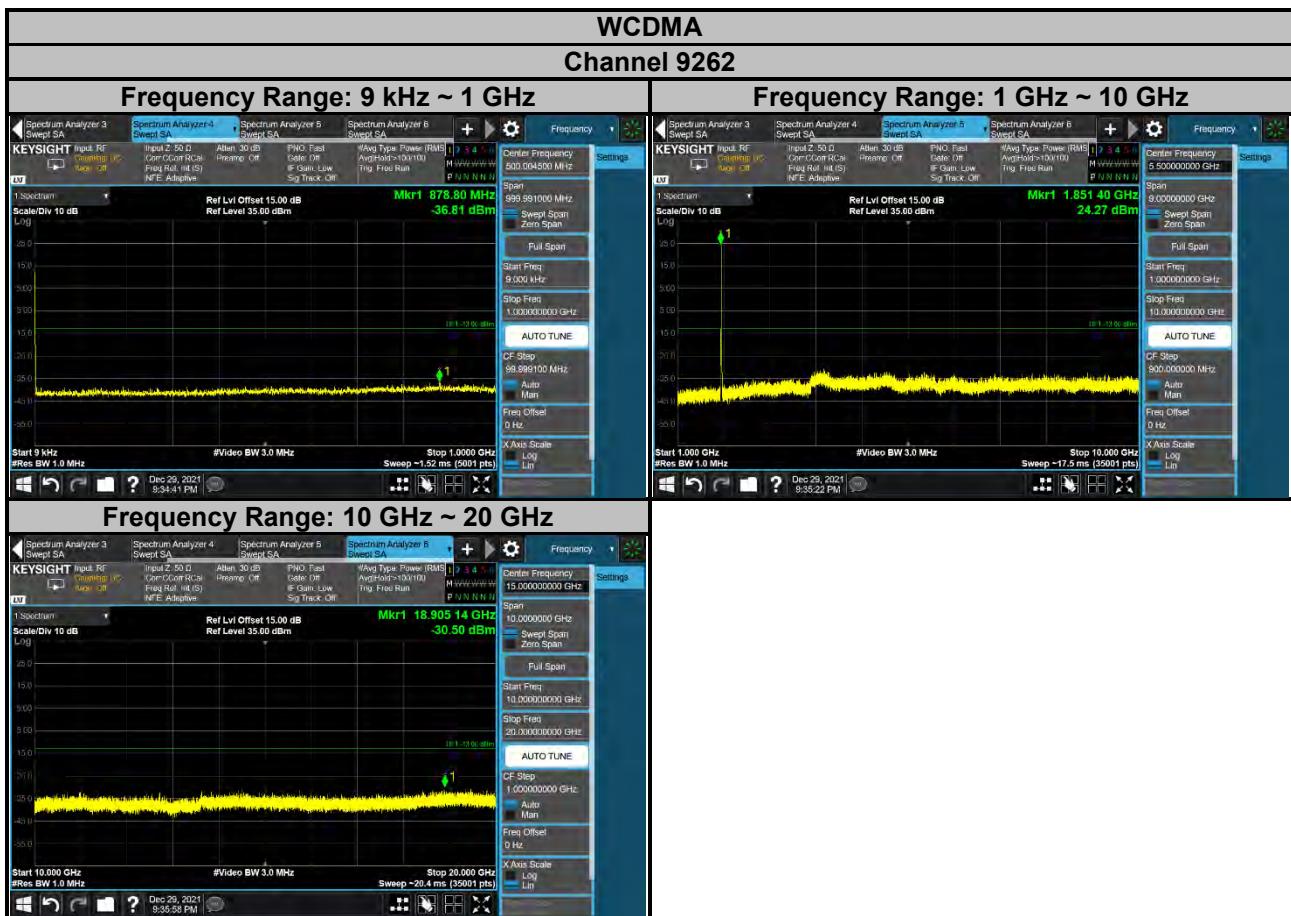


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

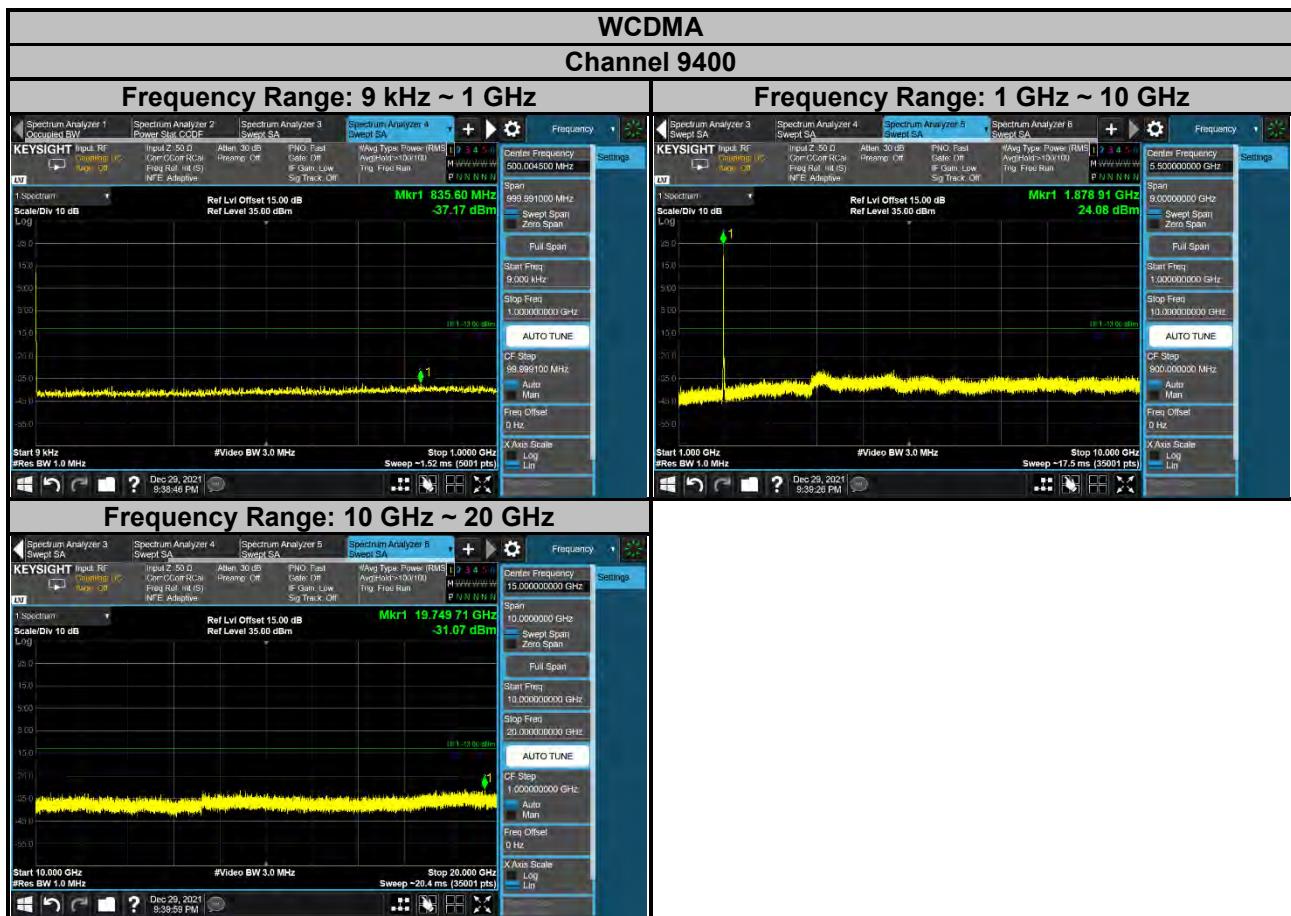


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

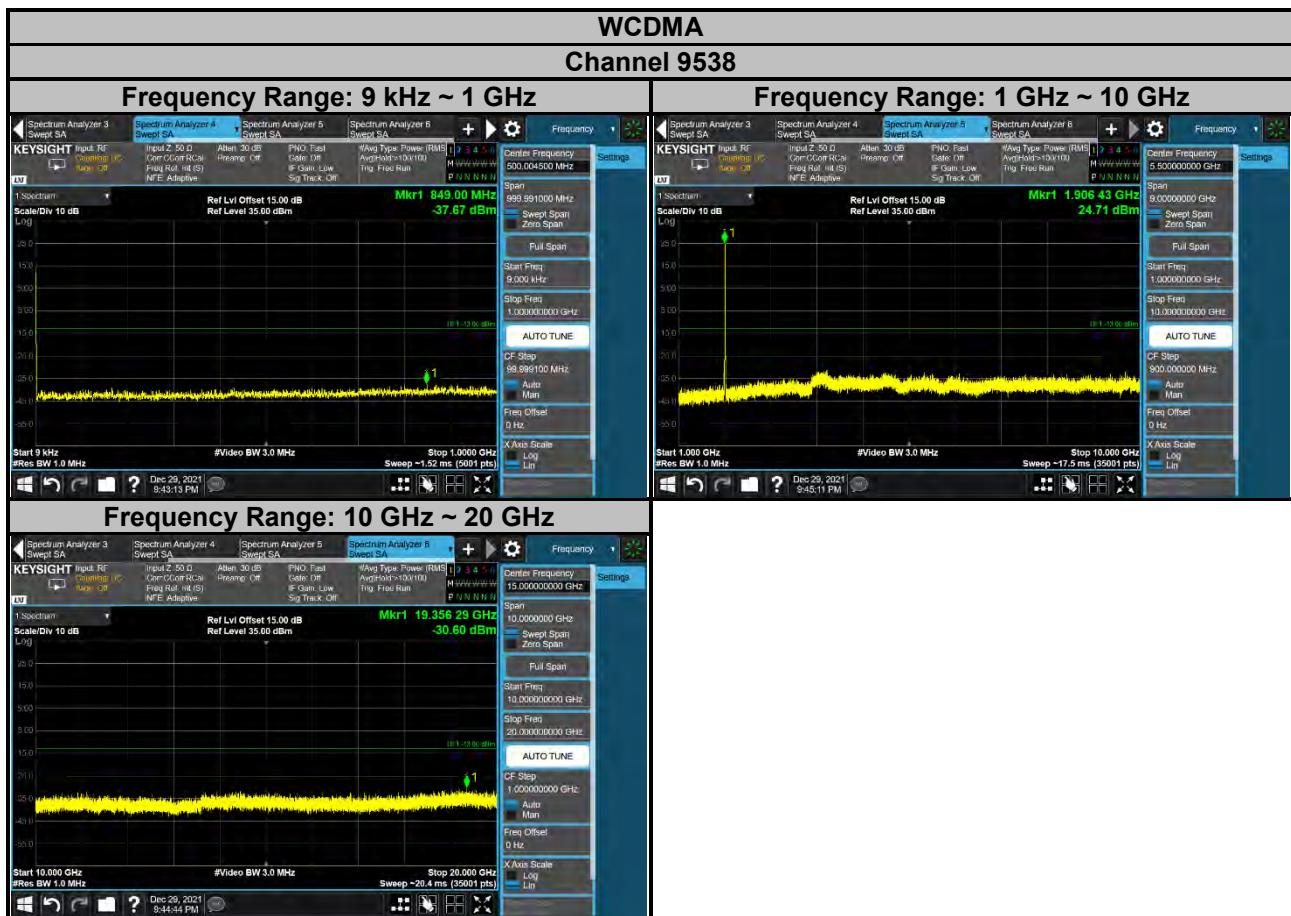


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

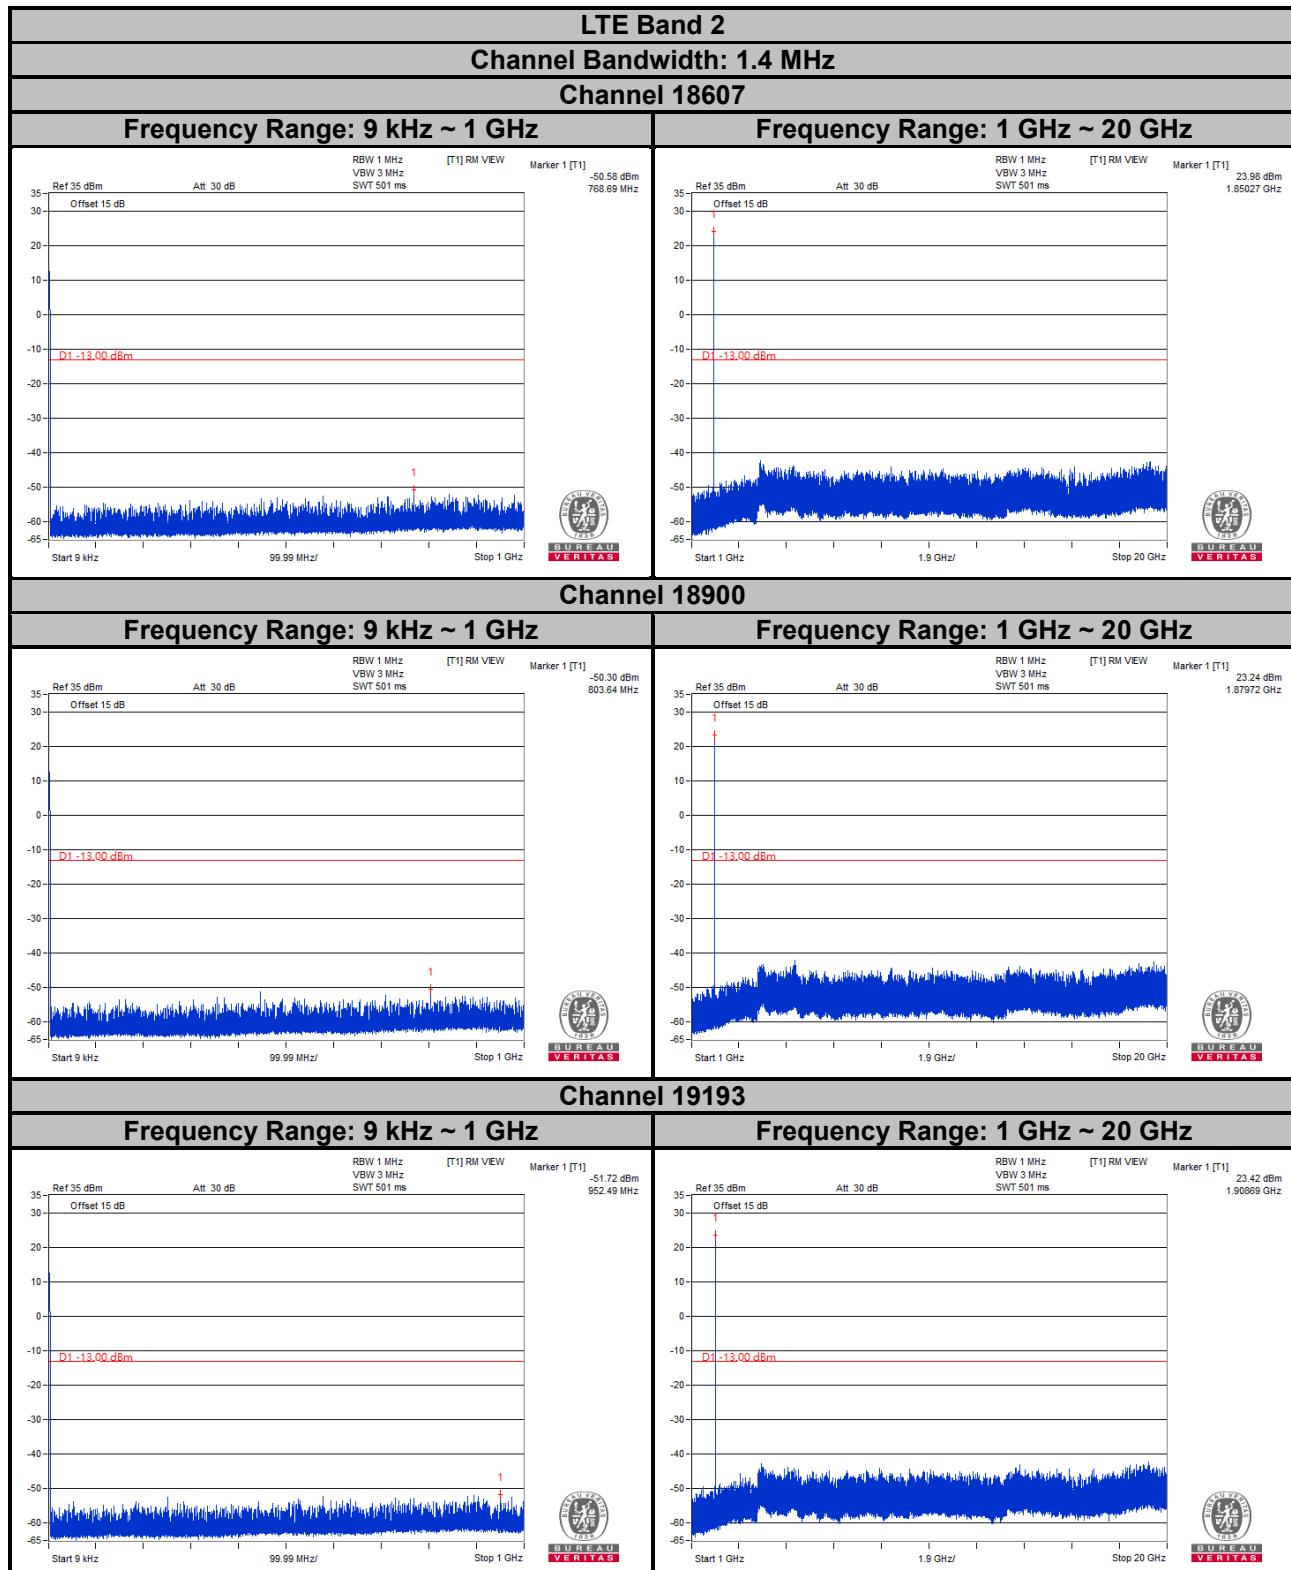


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

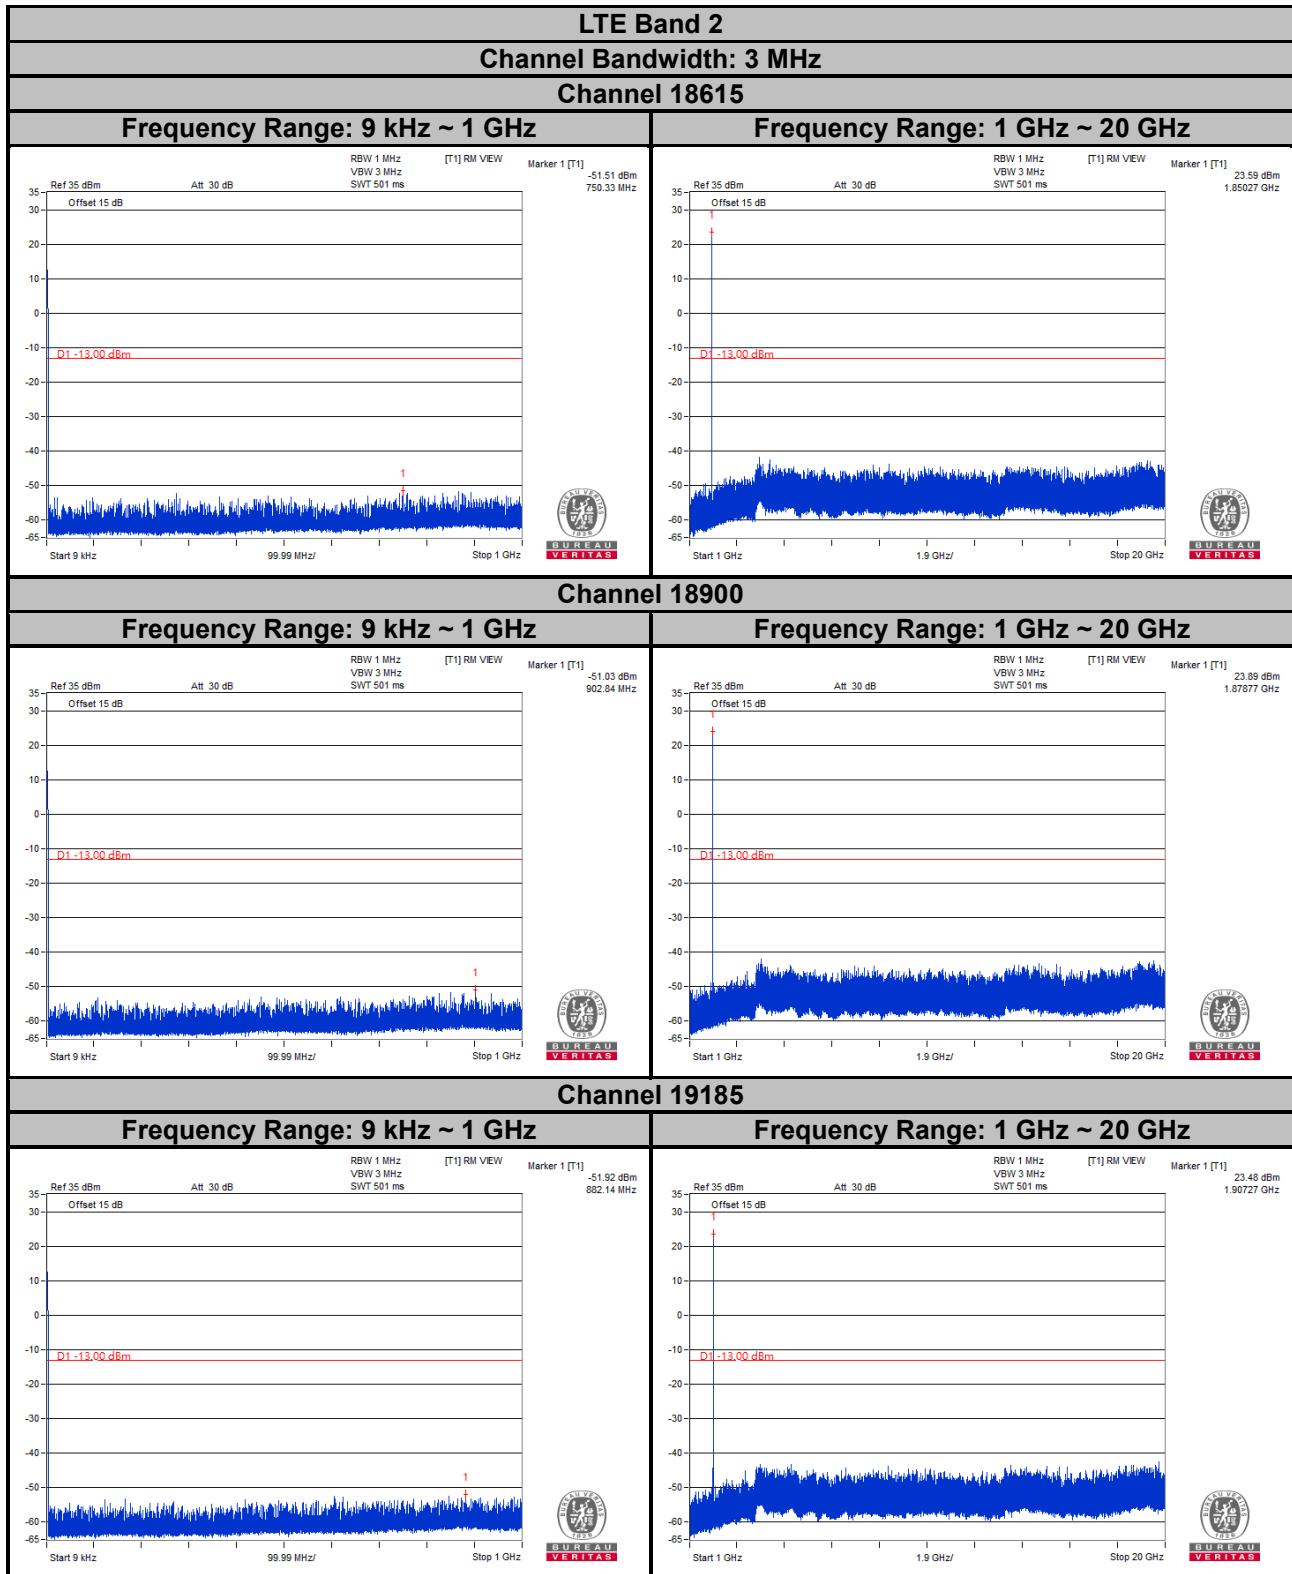


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

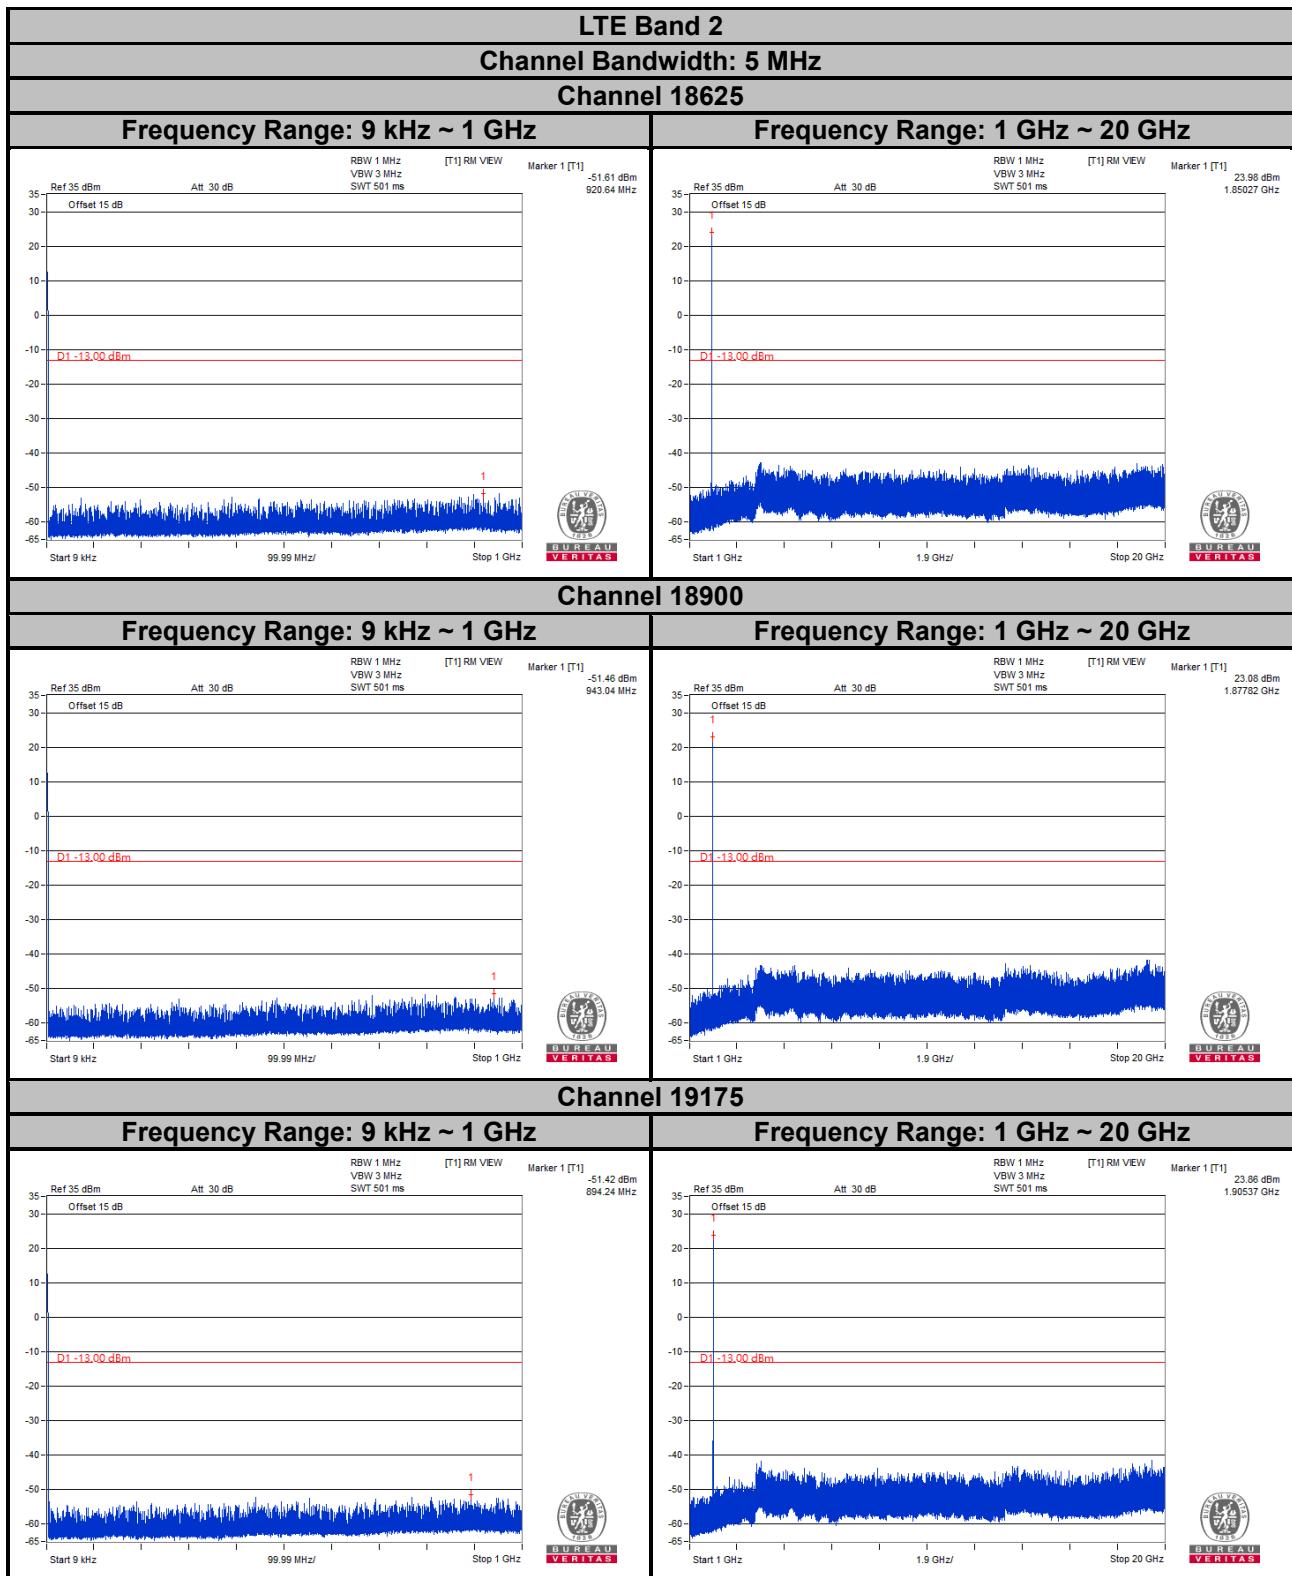


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

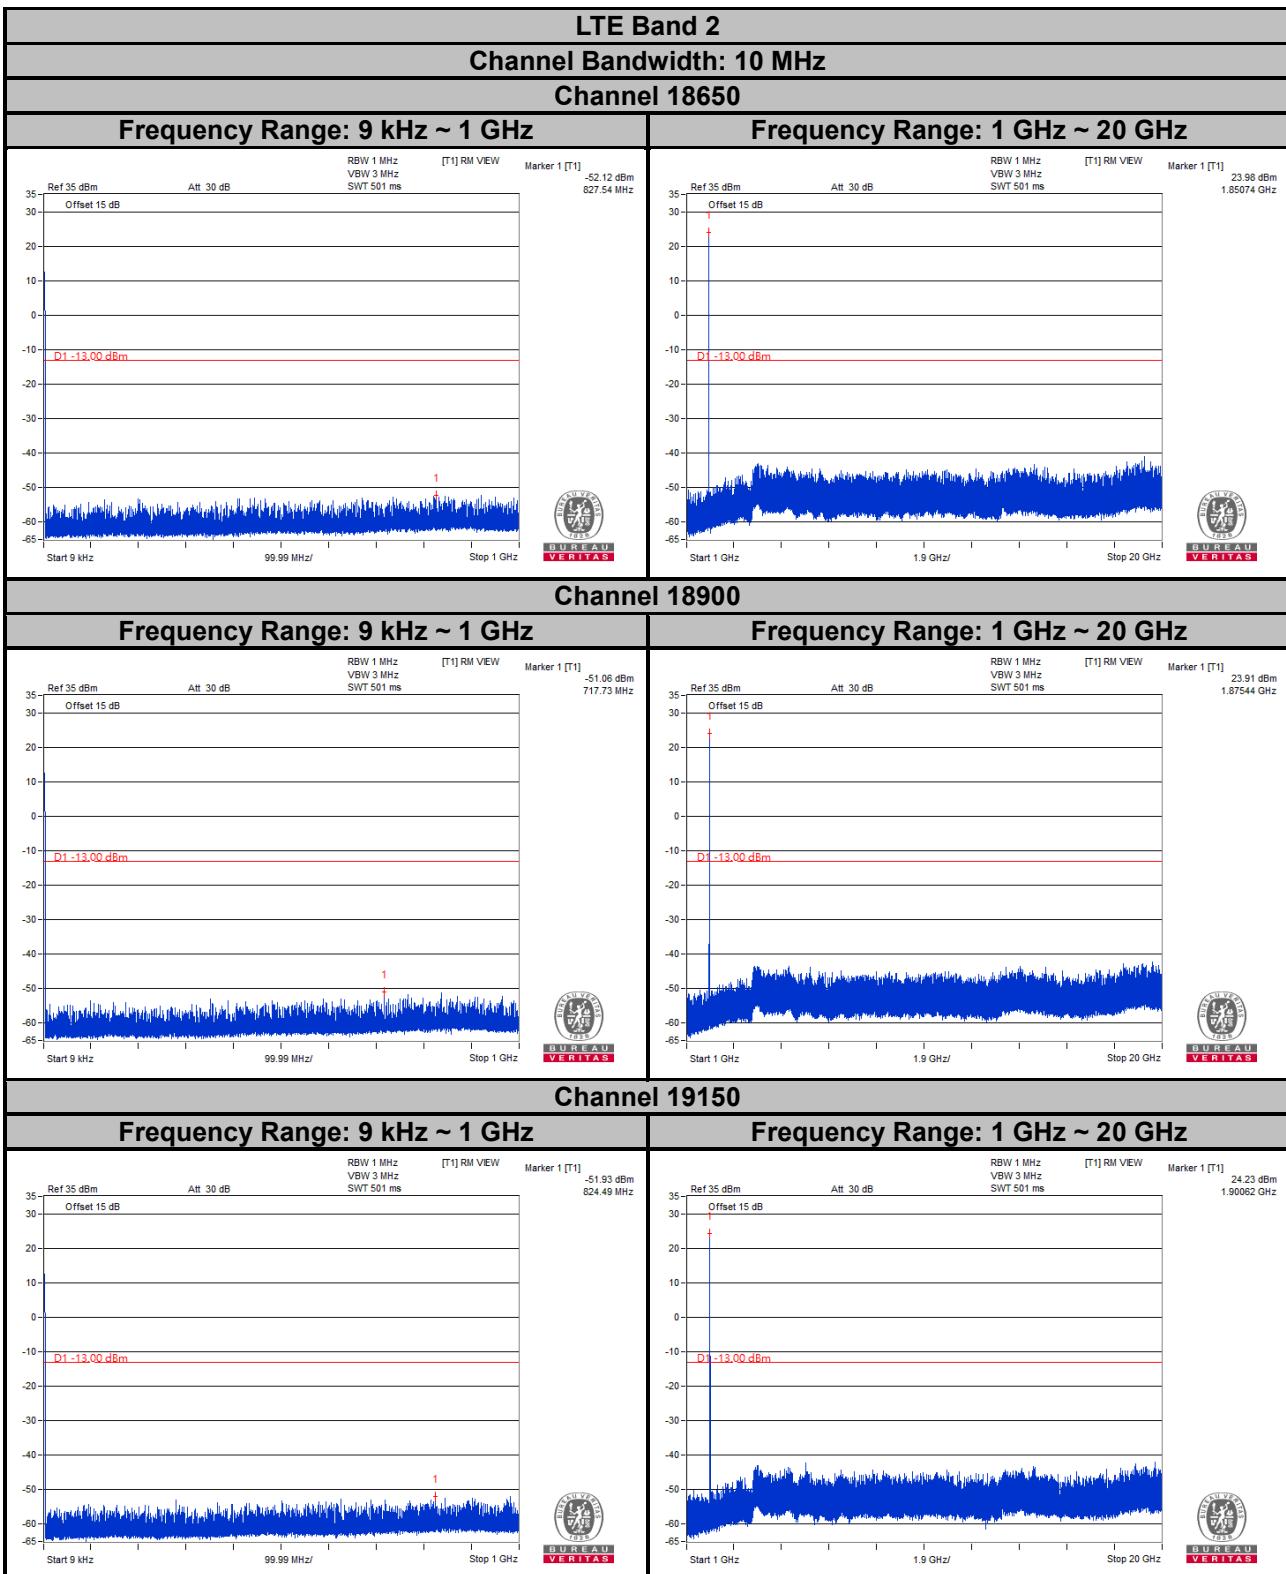


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

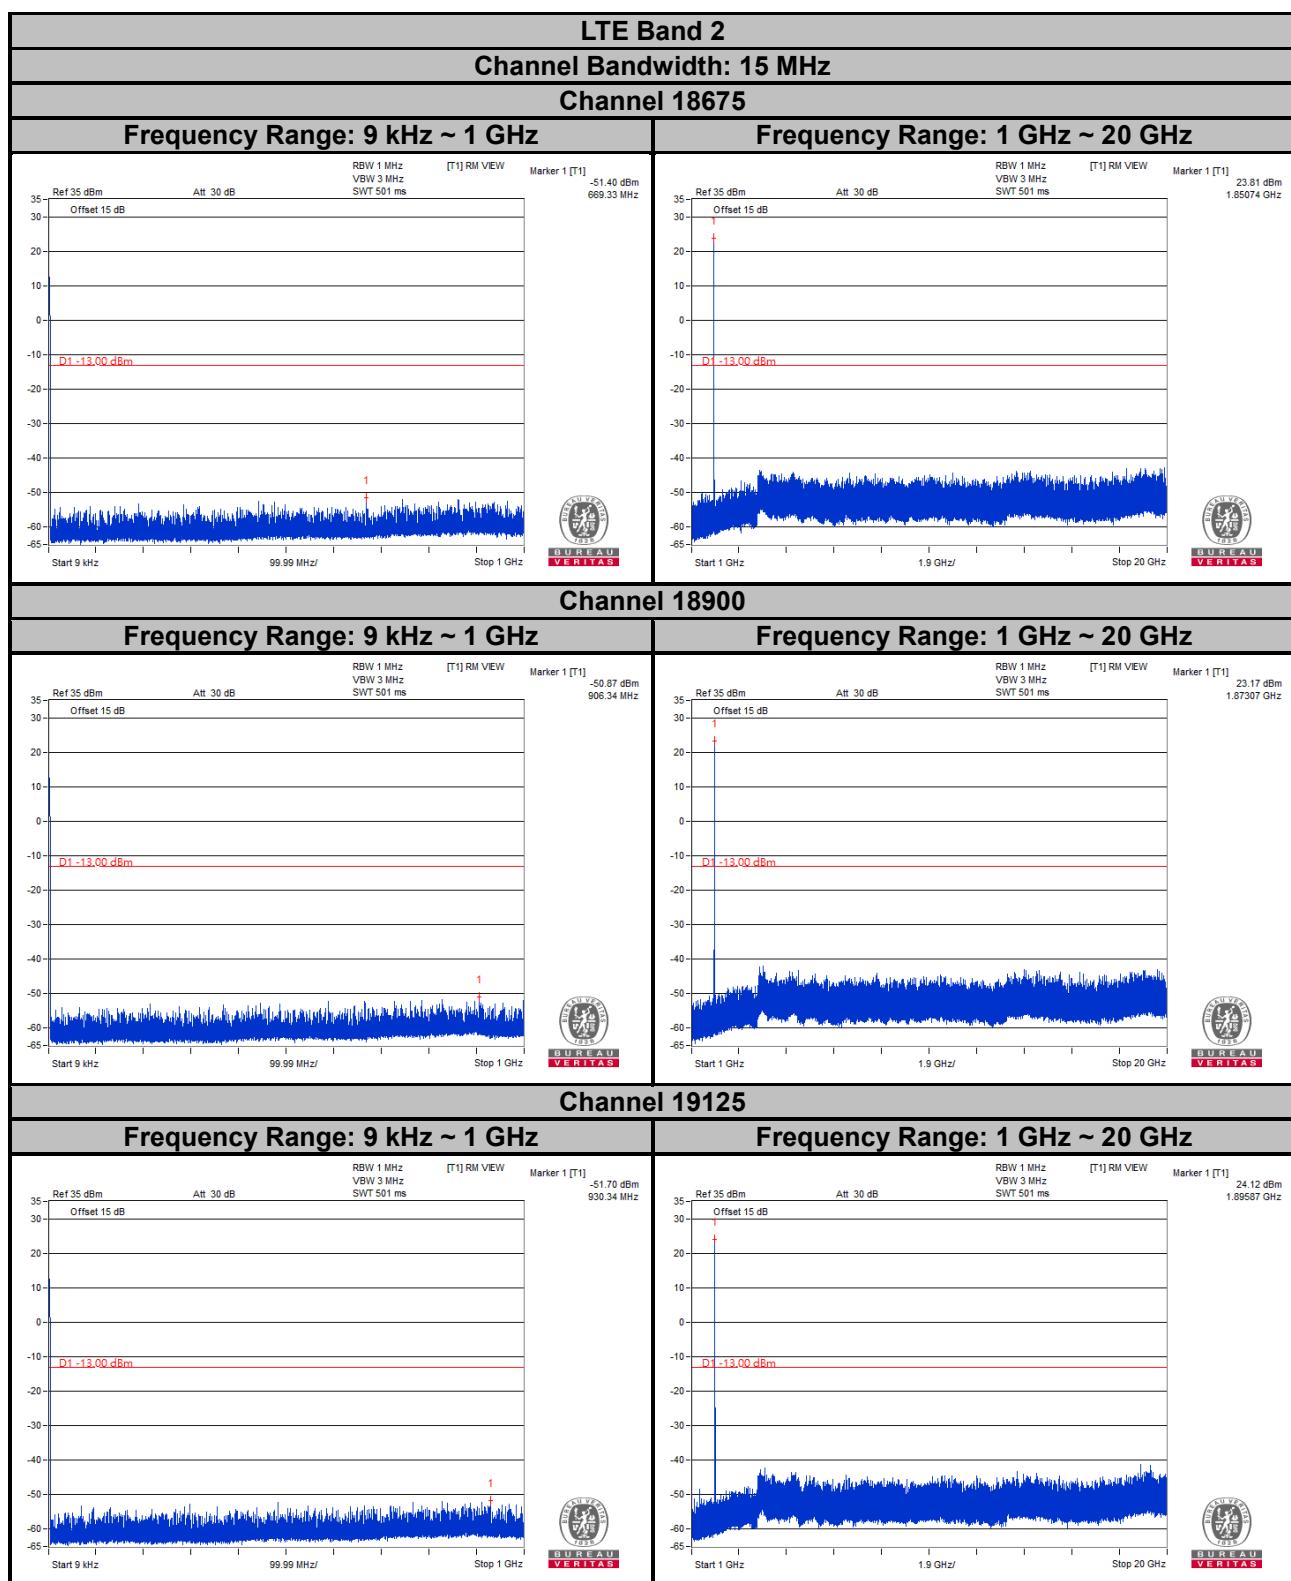


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

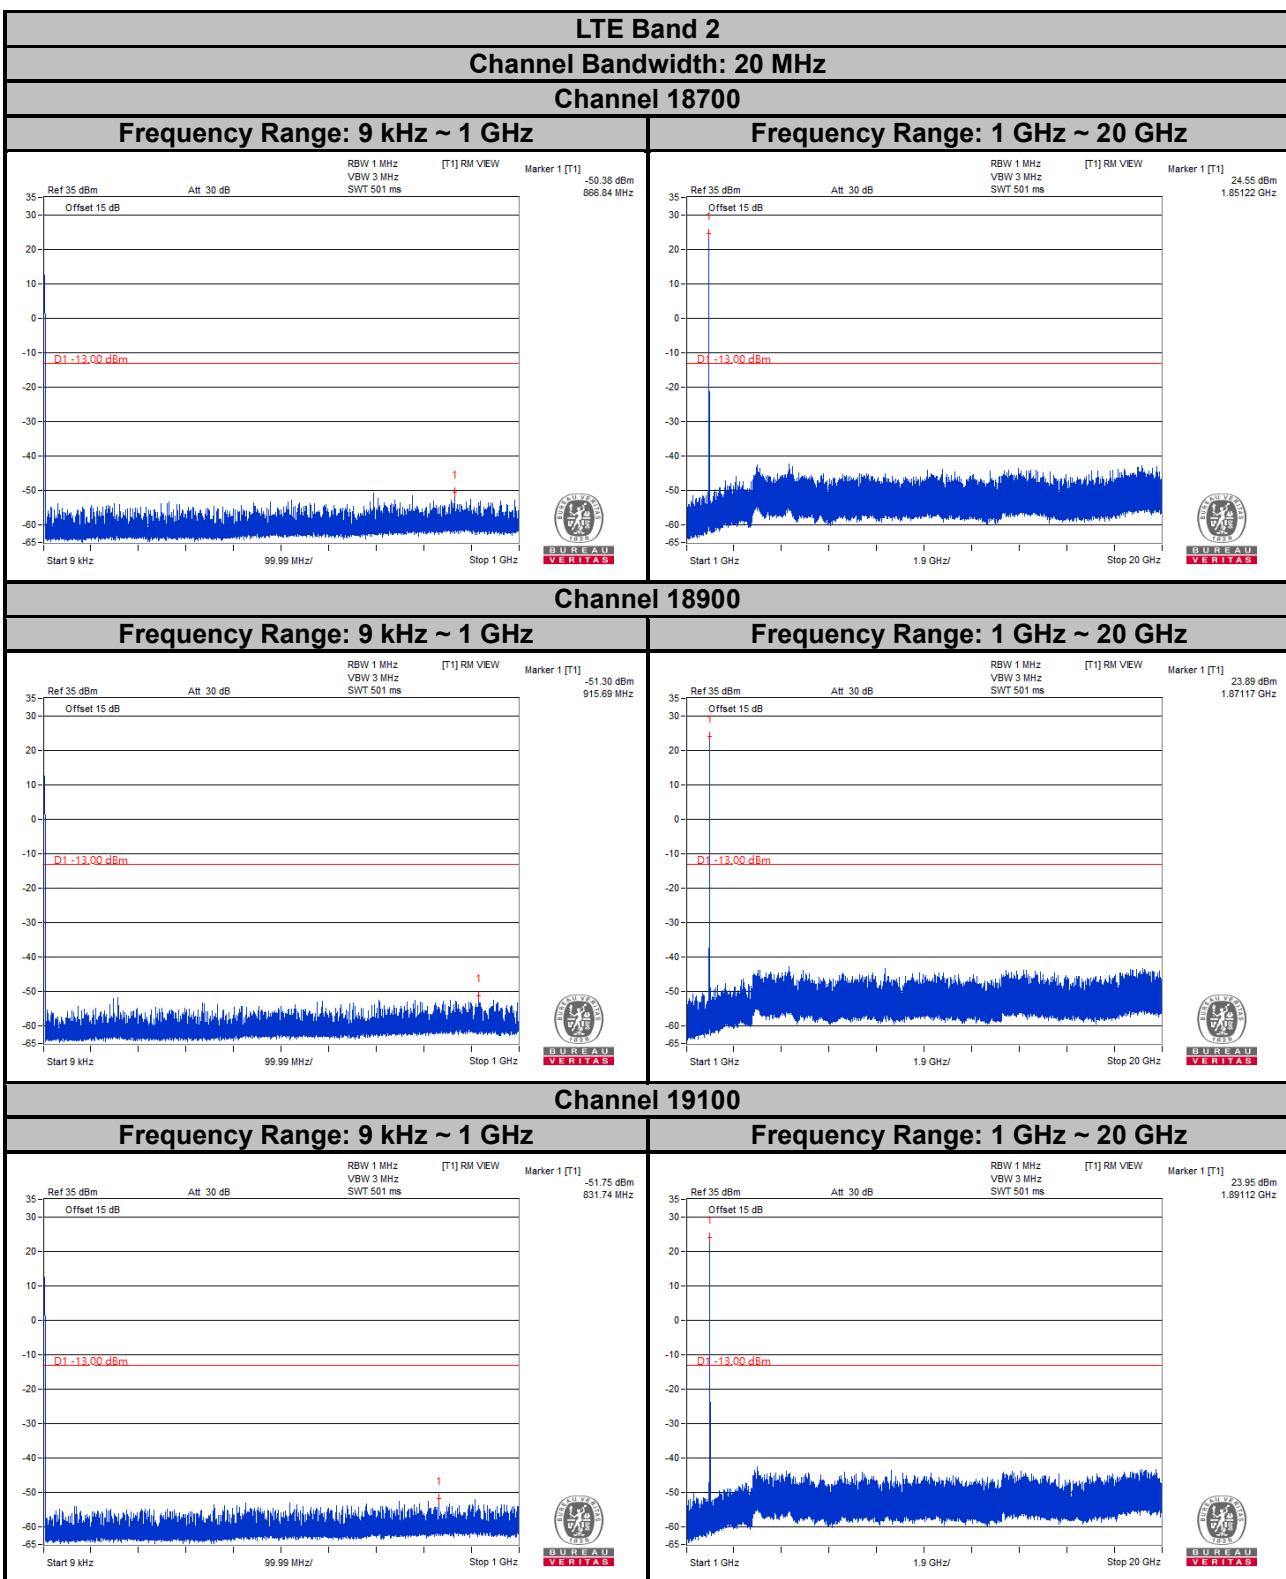


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

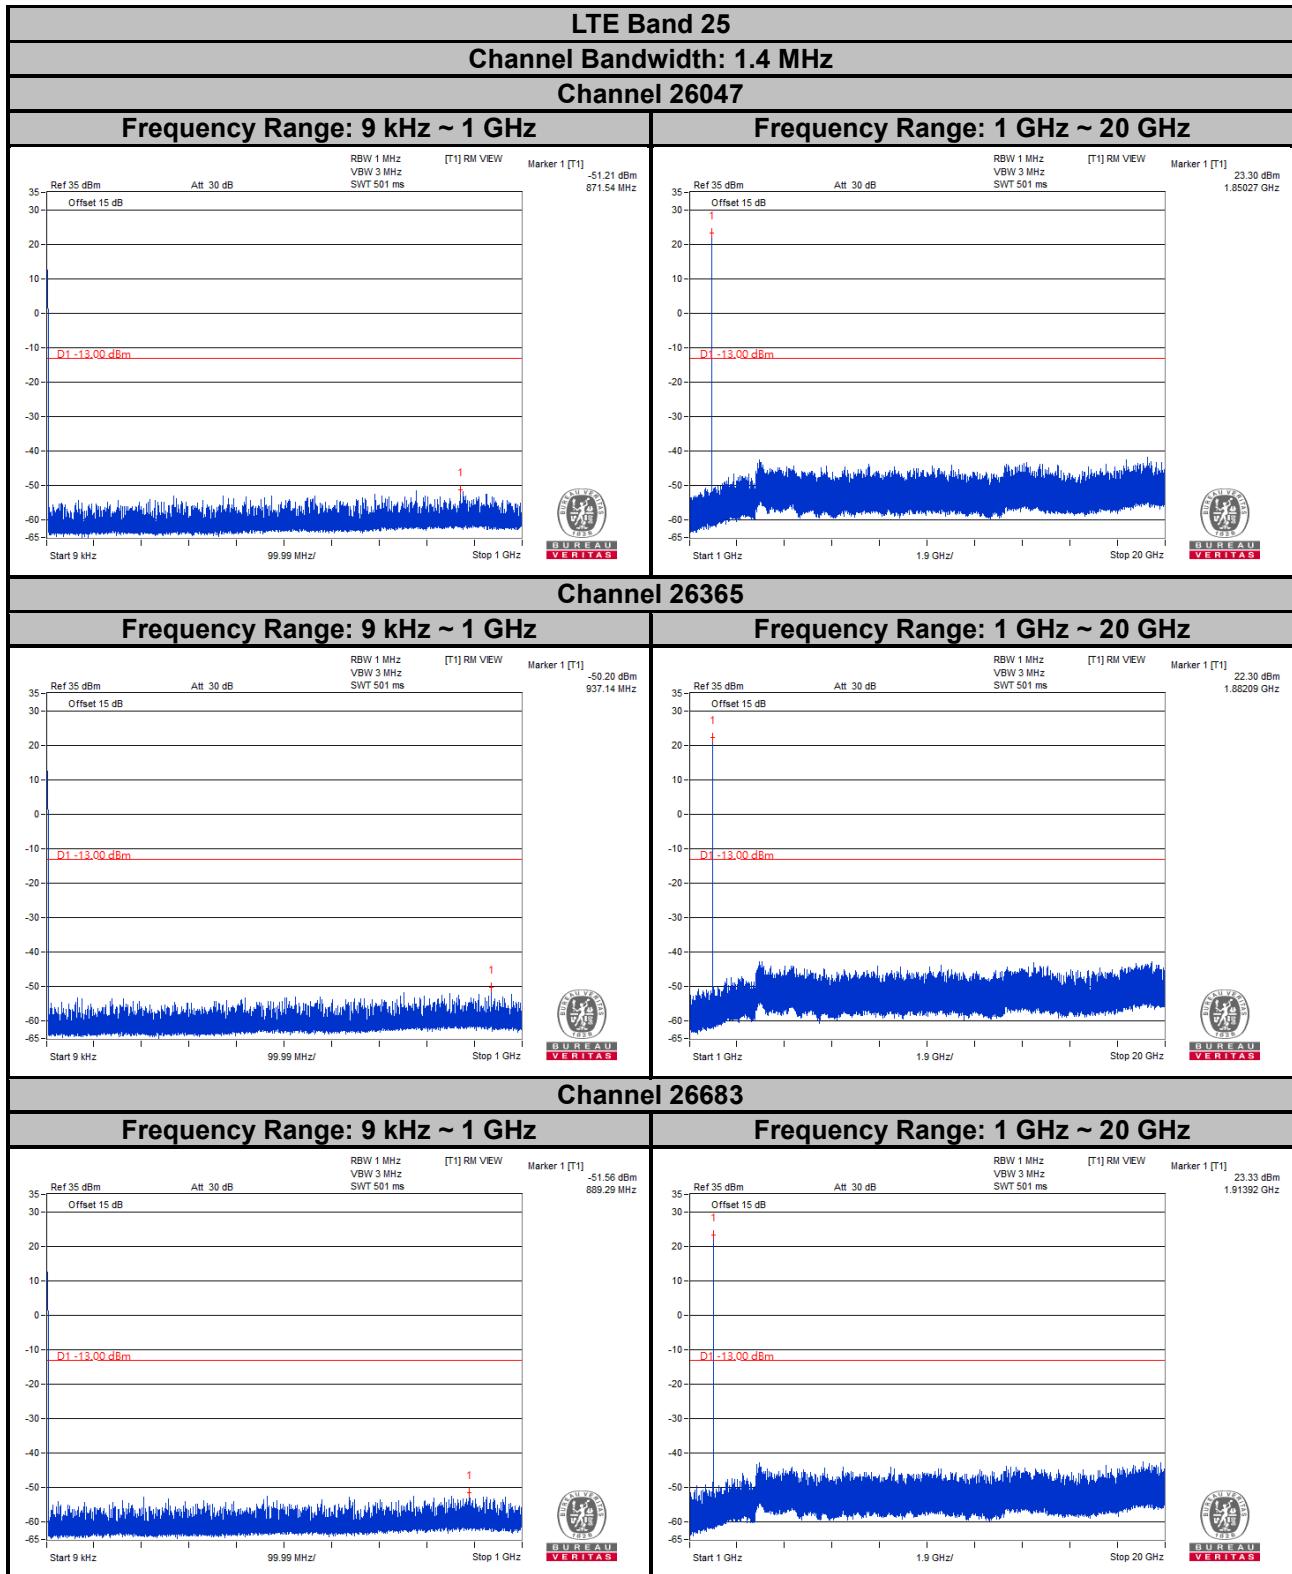


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

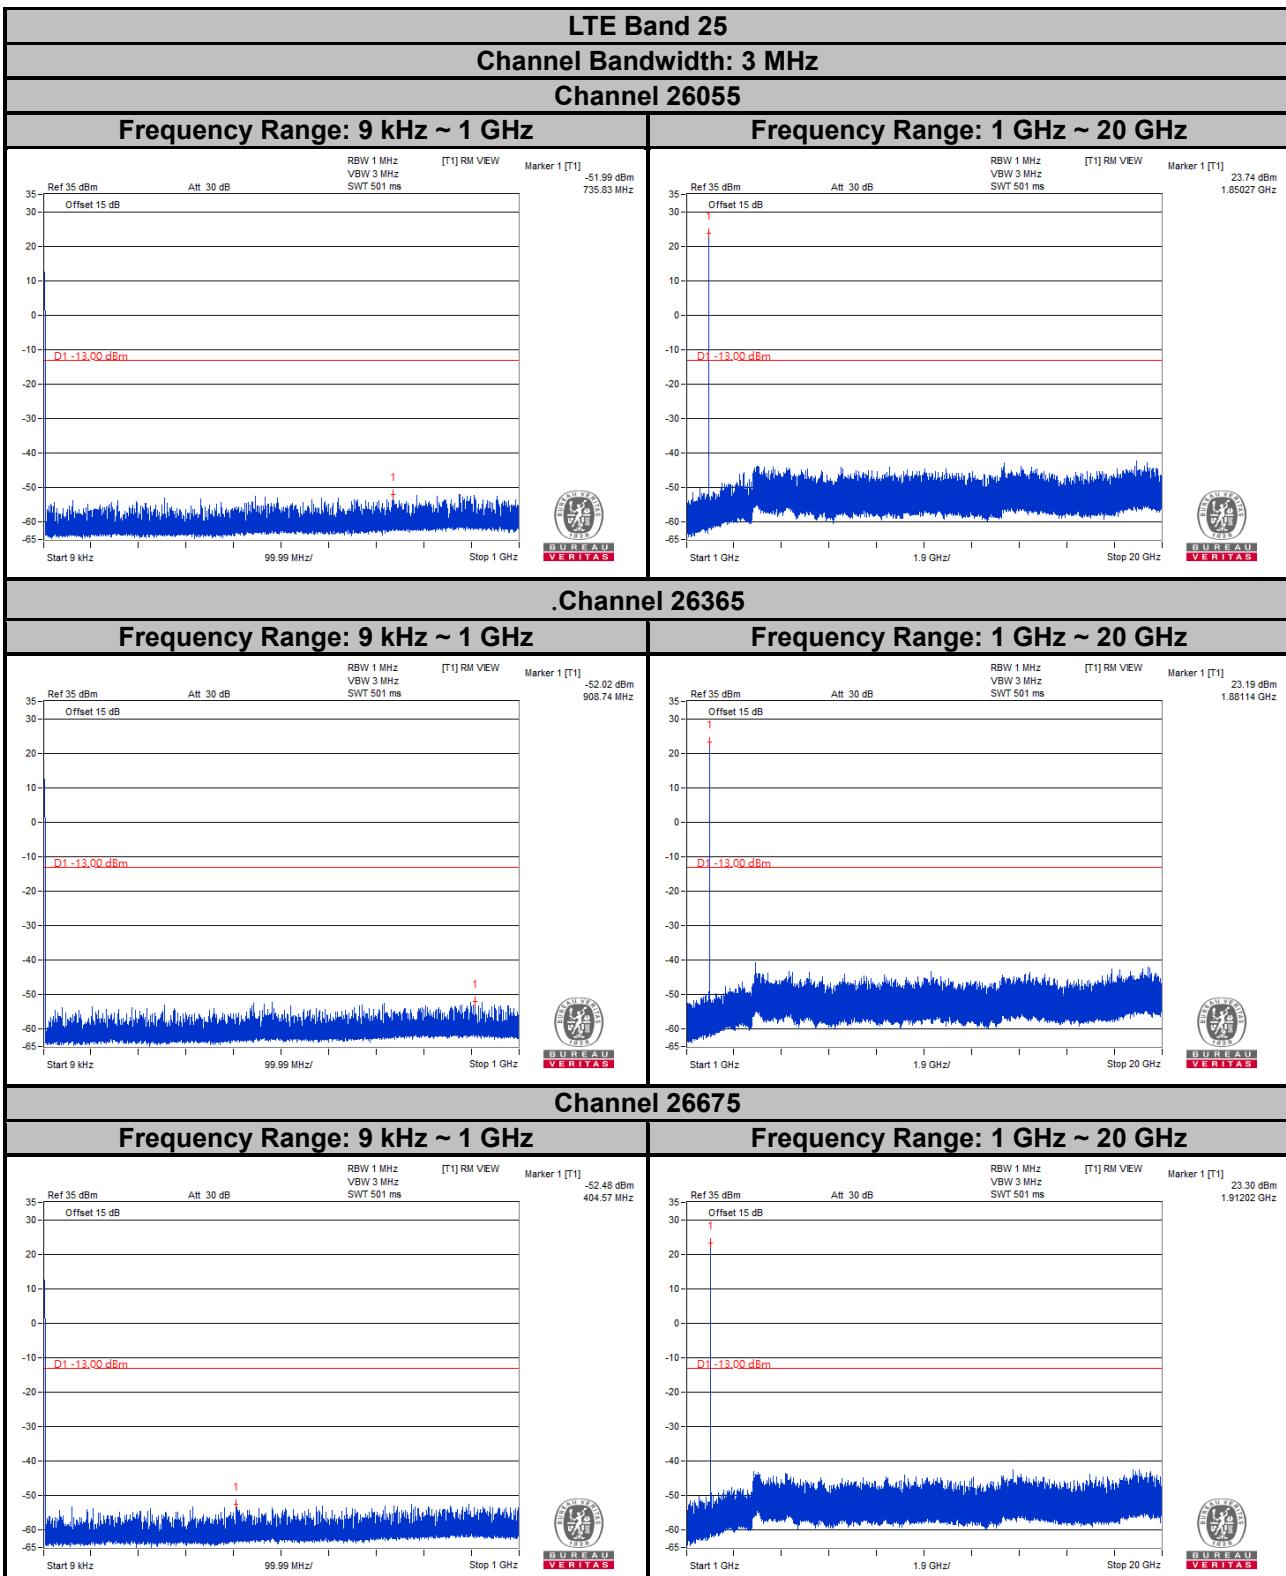


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

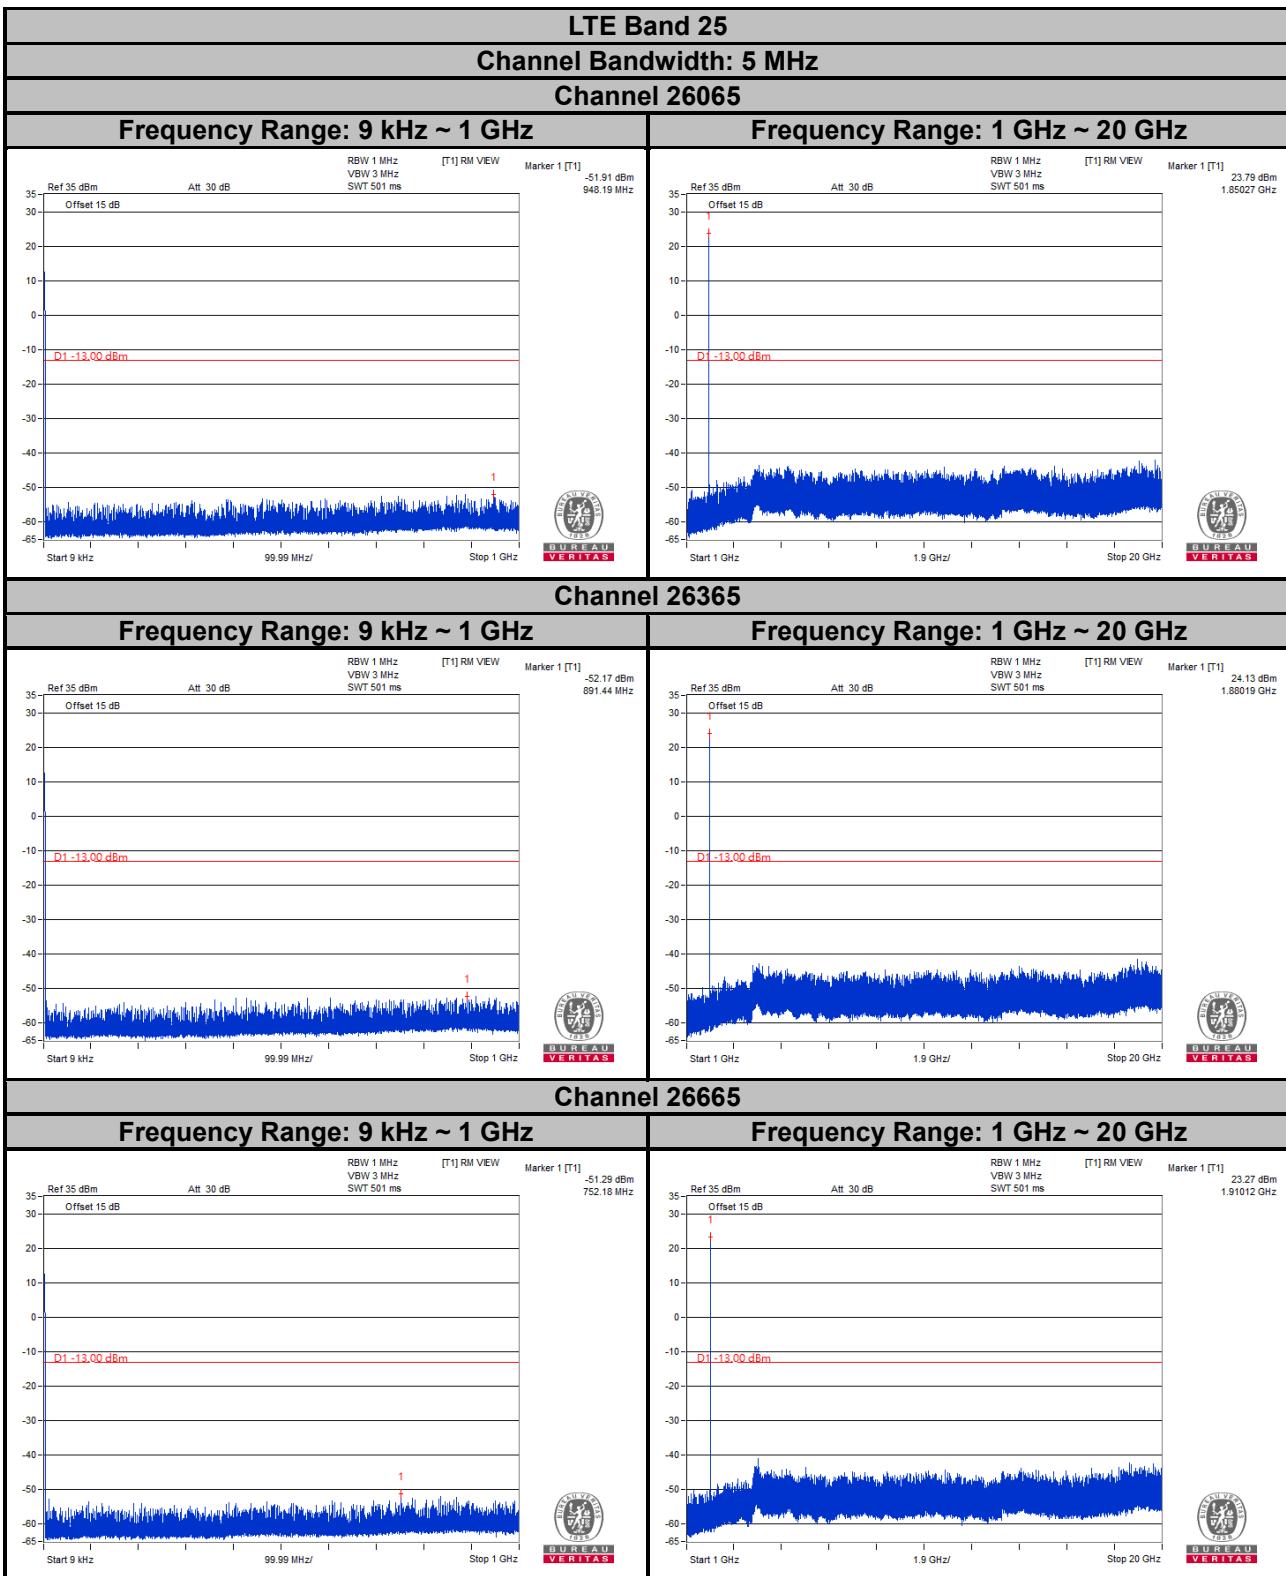


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

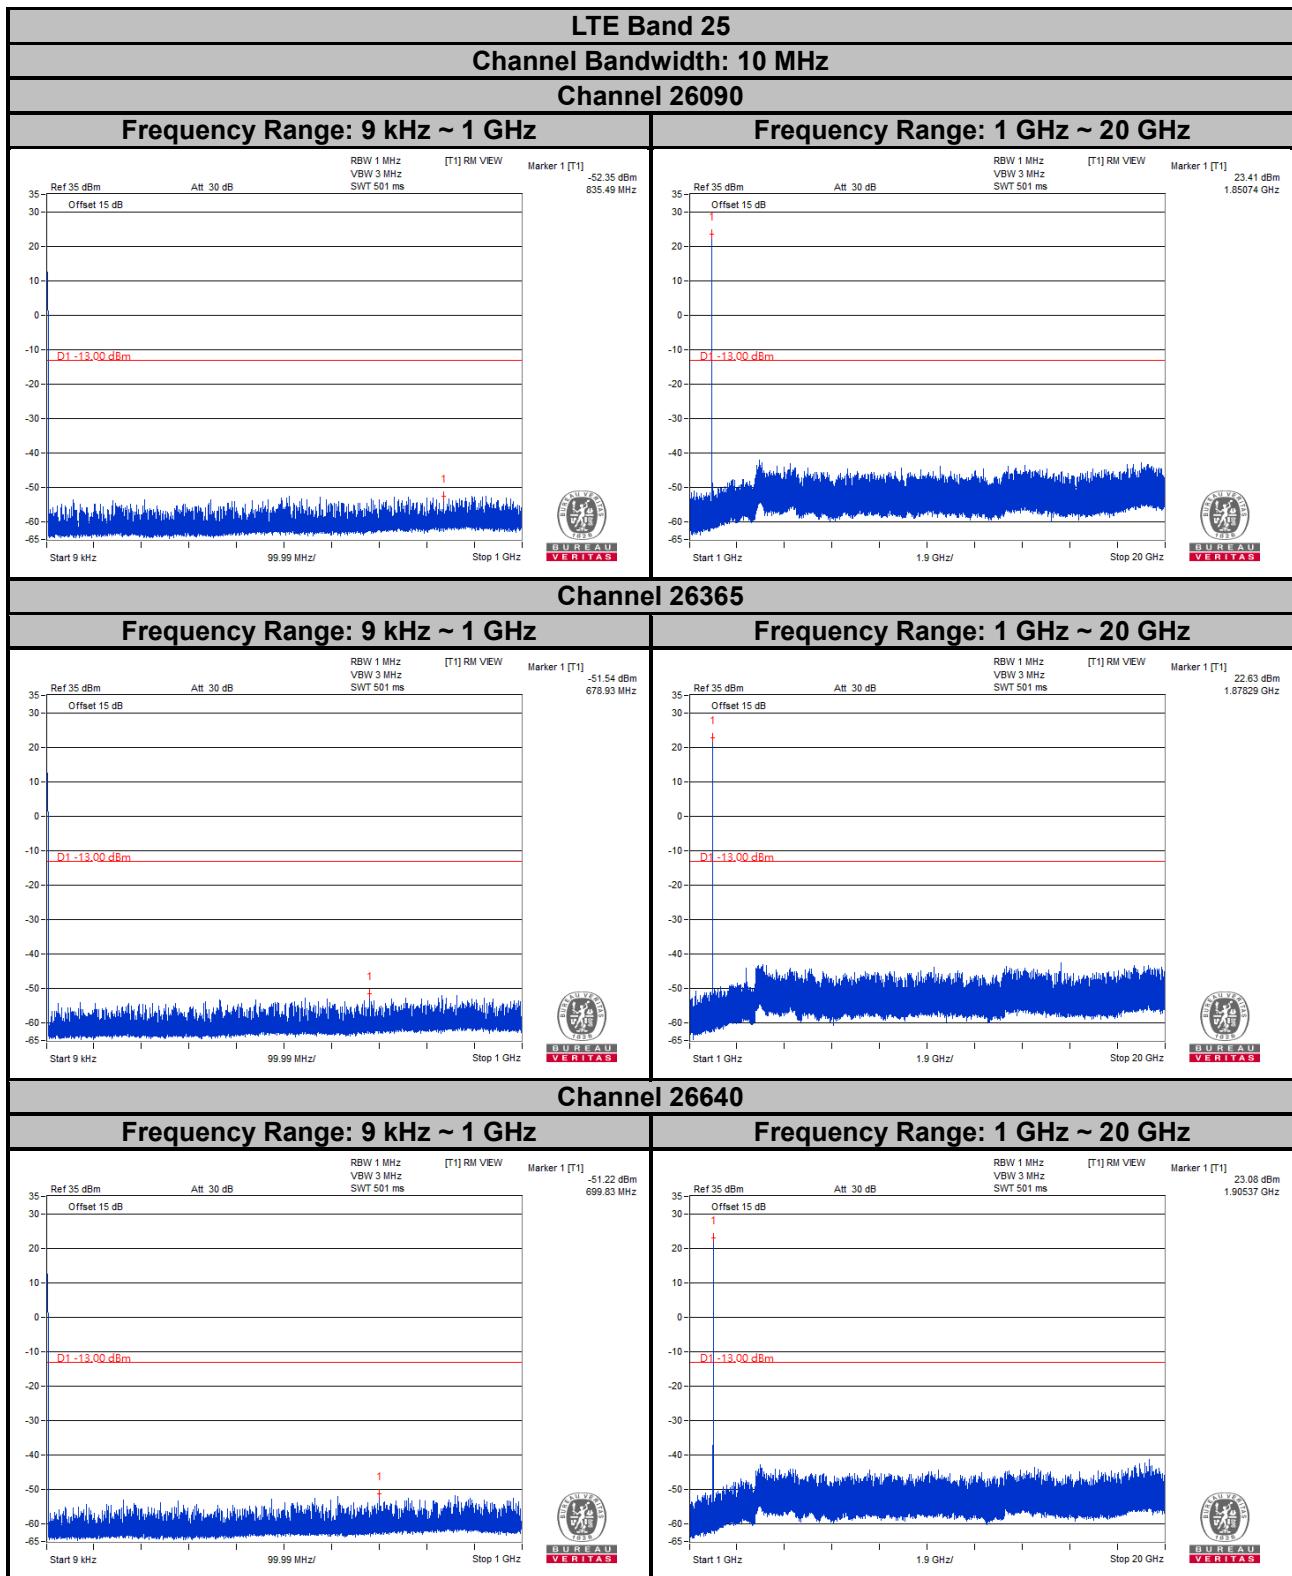

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

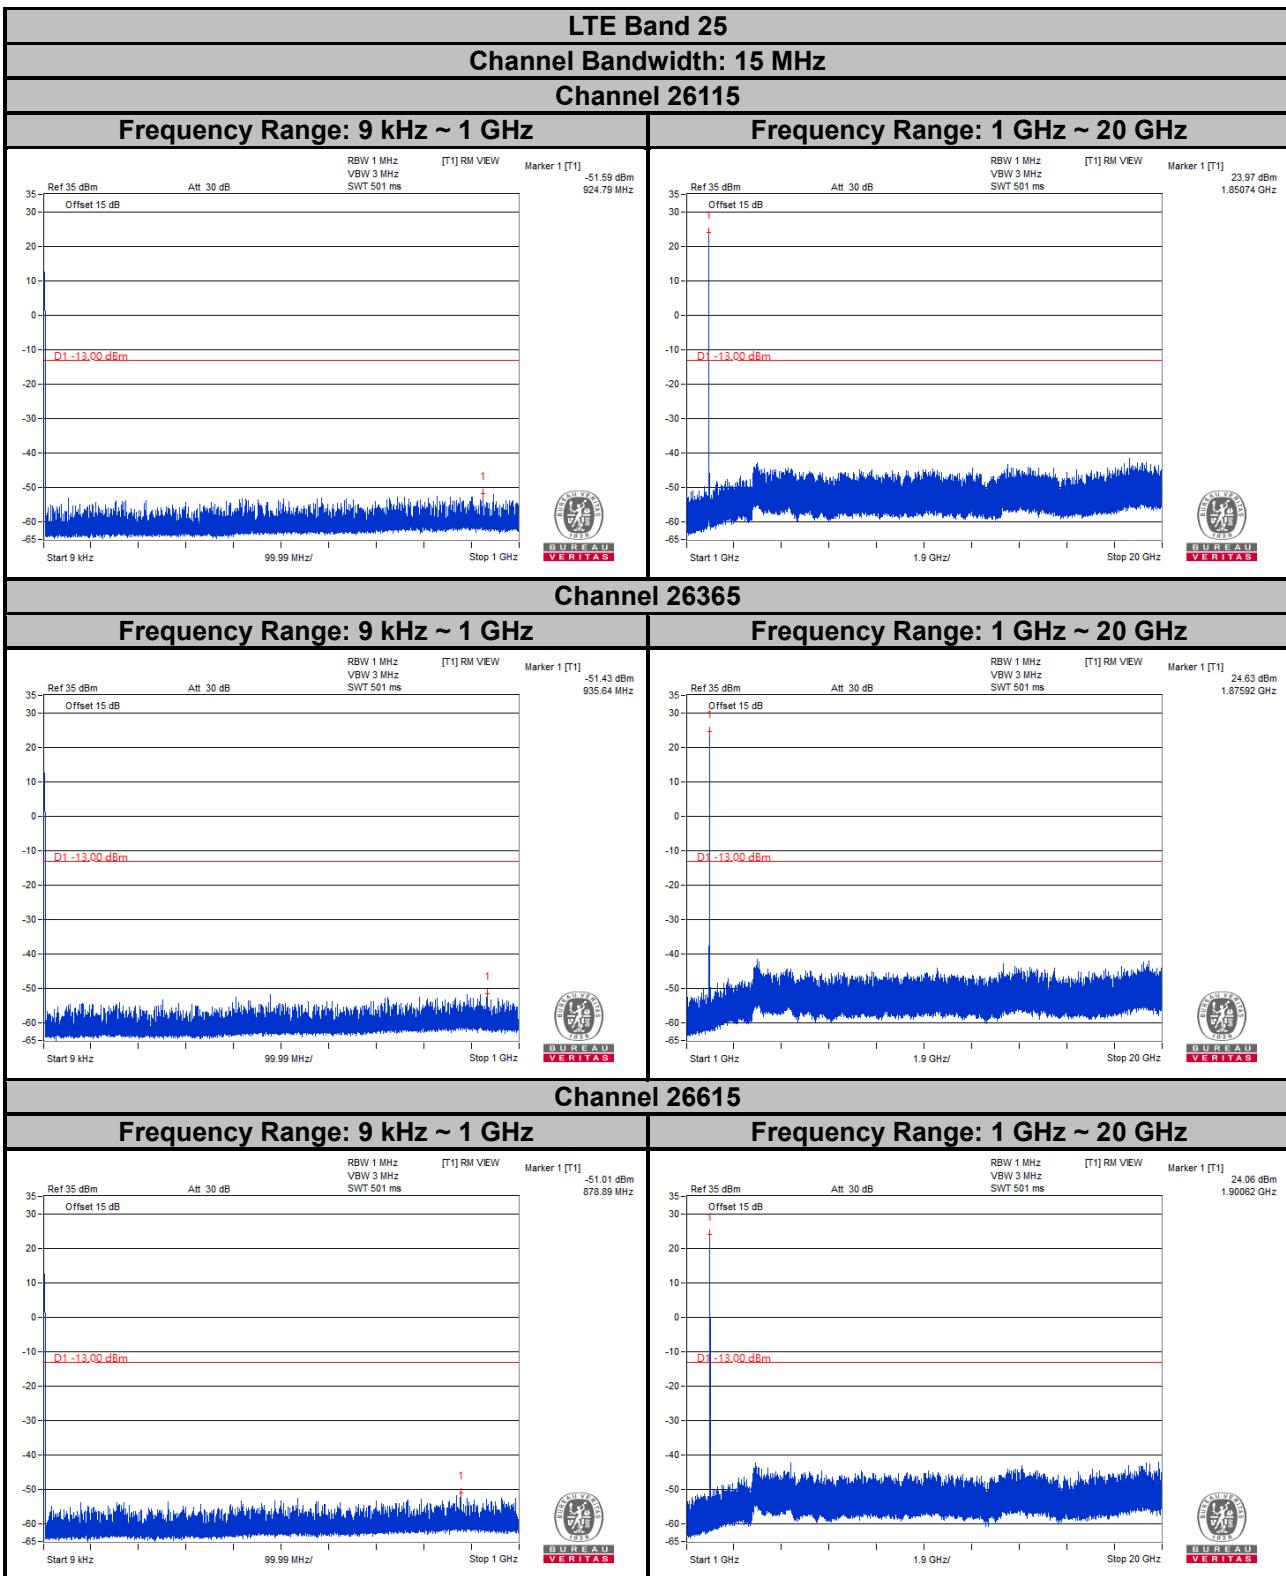

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

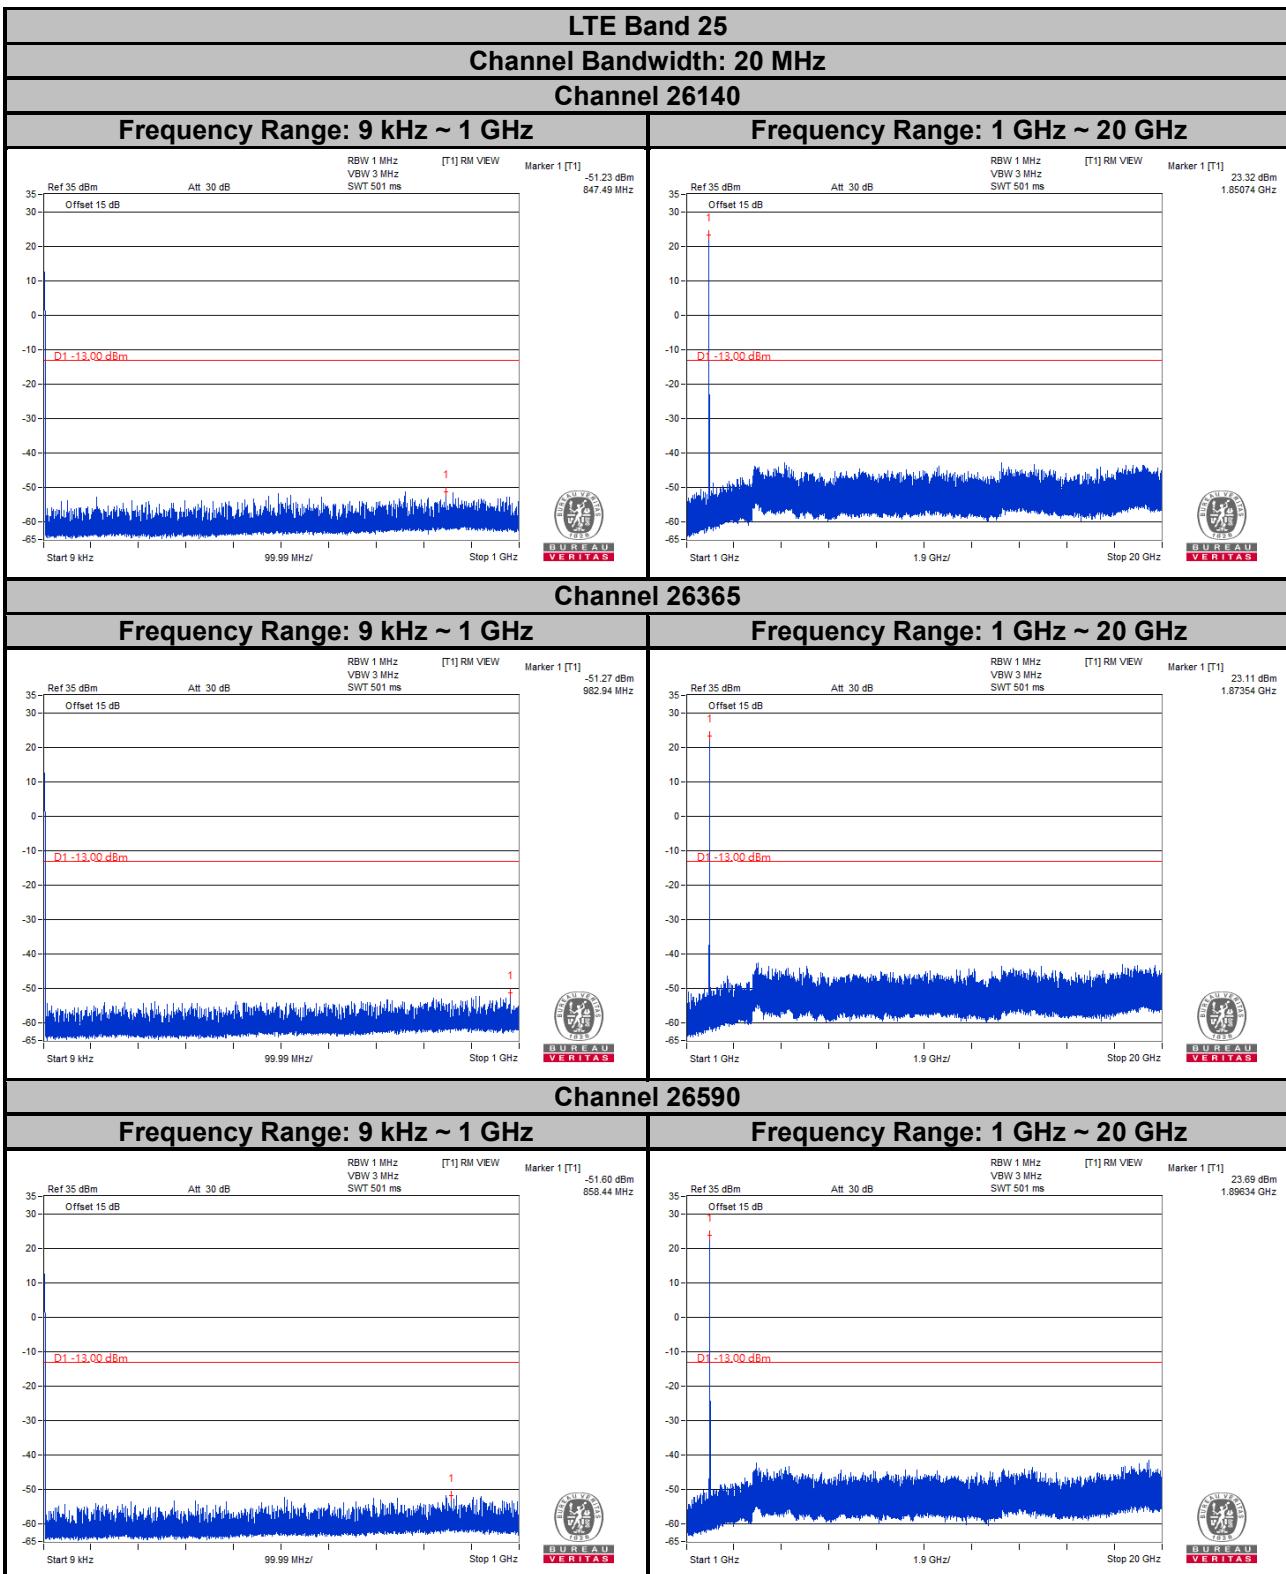

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 $EIRP (\text{dBm}) = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 $ERP (\text{dBm}) = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

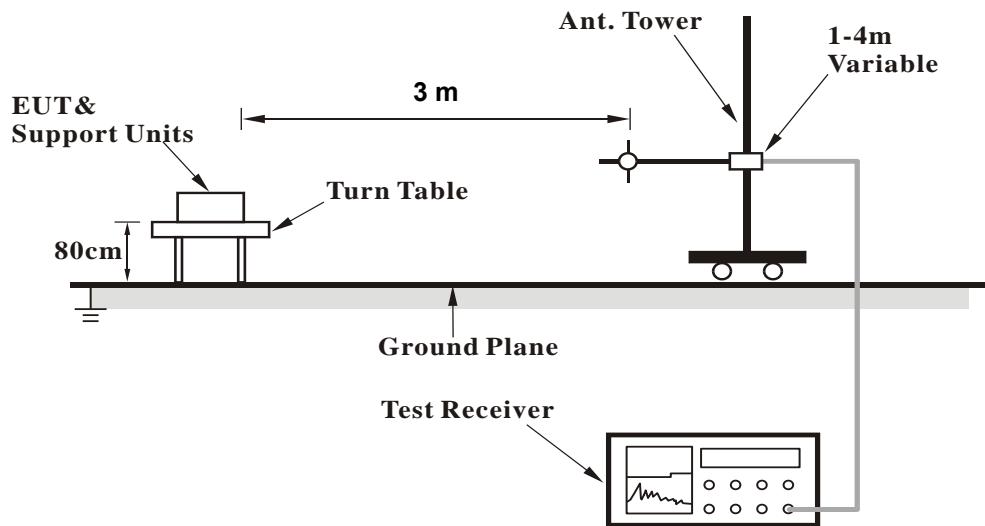

<Radiated Emission above 1 GHz>

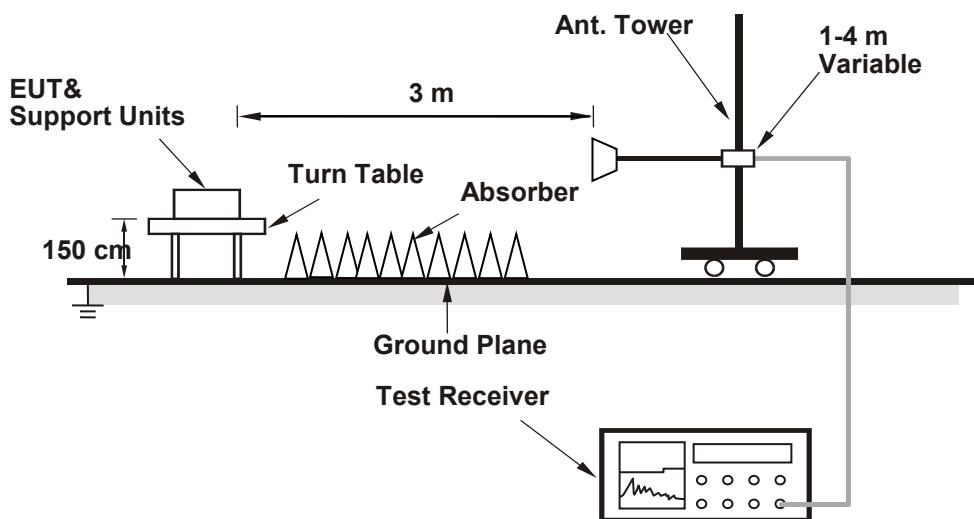

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results


Below 1 GHz

RF Mode	TX WCDMA Band 2	Channel	CH 9538 : 1907.6 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	84.32	-60.33	-13.00	-47.33	1.05 H	279	53.20	-113.53
2	205.57	-59.10	-13.00	-46.10	1.18 H	89	52.35	-111.45
3	366.59	-61.27	-13.00	-48.27	1.40 H	151	43.97	-105.24
4	577.08	-55.91	-13.00	-42.91	1.00 H	162	43.73	-99.64
5	787.57	-53.15	-13.00	-40.15	1.35 H	91	42.08	-95.23
6	947.62	-50.60	-13.00	-37.60	1.17 H	301	41.97	-92.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ $20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

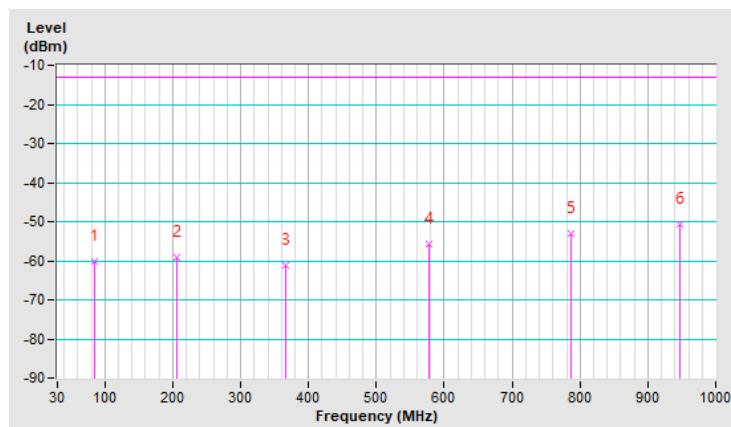


RF Mode	TX WCDMA Band 2	Channel	CH 9538 : 1907.6 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.07	-49.71	-13.00	-36.71	1.12 V	96	59.02	-108.73
2	222.06	-59.69	-13.00	-46.69	1.03 V	241	51.99	-111.68
3	366.59	-52.80	-13.00	-39.80	1.22 V	17	52.44	-105.24
4	578.05	-56.59	-13.00	-43.59	1.08 V	139	43.02	-99.61
5	778.84	-52.49	-13.00	-39.49	1.08 V	299	42.75	-95.24
6	943.74	-50.07	-13.00	-37.07	1.44 V	297	42.54	-92.61

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

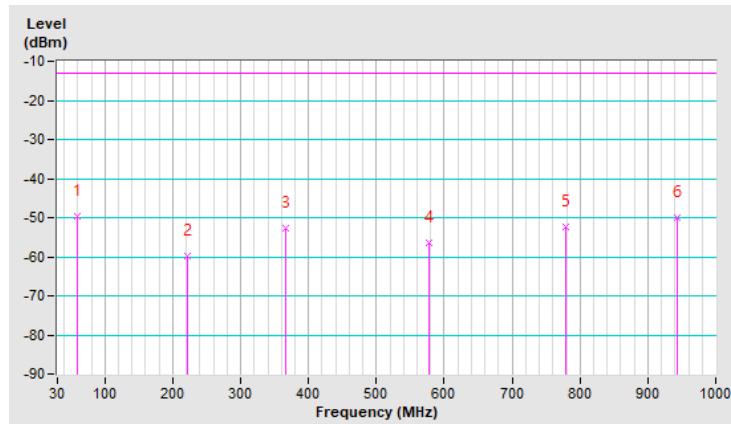


RF Mode	TX LTE Band 2-20MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	84.32	-56.55	-13.00	-43.55	1.08 H	309	56.98	-113.53
2	220.12	-55.38	-13.00	-42.38	1.29 H	127	56.22	-111.60
3	411.21	-60.57	-13.00	-47.57	1.13 H	195	43.65	-104.22
4	569.32	-57.30	-13.00	-44.30	1.26 H	122	42.79	-100.09
5	758.47	-52.01	-13.00	-39.01	1.05 H	163	43.77	-95.78
6	978.66	-48.89	-13.00	-35.89	1.02 H	188	43.35	-92.24

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

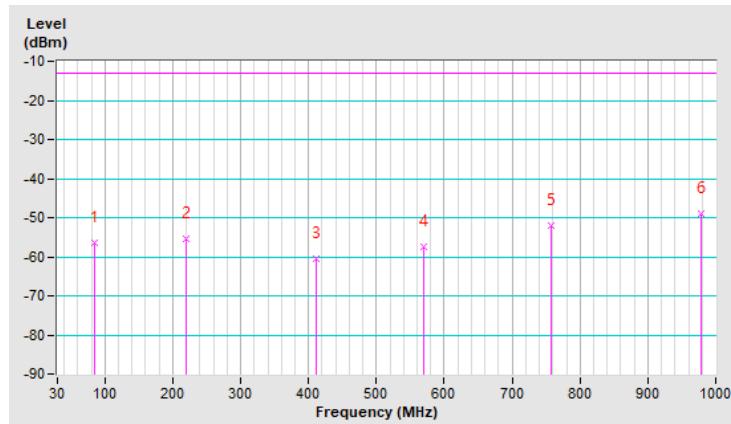


RF Mode	TX LTE Band 2-20MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.25	-51.34	-13.00	-38.34	1.35 V	21	56.78	-108.12
2	164.83	-56.40	-13.00	-43.40	1.06 V	311	51.58	-107.98
3	378.23	-57.65	-13.00	-44.65	1.14 V	277	47.21	-104.86
4	578.05	-57.66	-13.00	-44.66	1.15 V	16	41.95	-99.61
5	801.15	-51.99	-13.00	-38.99	1.04 V	106	42.85	-94.84
6	958.29	-49.80	-13.00	-36.80	1.14 V	221	42.67	-92.47

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

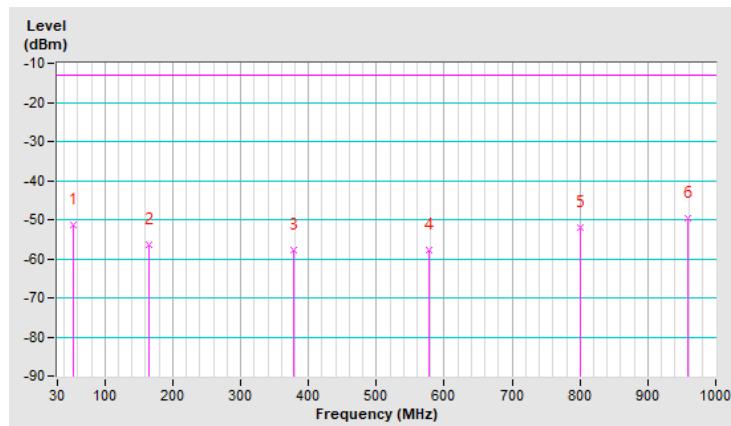


RF Mode	TX LTE Band 25-20MHz	Channel	CH 26590 : 1905 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	82.38	-53.48	-13.00	-40.48	1.17 H	104	59.80	-113.28
2	220.12	-55.44	-13.00	-42.44	1.05 H	28	56.16	-111.60
3	449.04	-59.75	-13.00	-46.75	1.25 H	124	42.91	-102.66
4	611.03	-53.62	-13.00	-40.62	1.40 H	5	44.84	-98.46
5	782.72	-51.25	-13.00	-38.25	1.19 H	128	43.97	-95.22
6	955.38	-49.73	-13.00	-36.73	1.12 H	155	42.77	-92.50

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

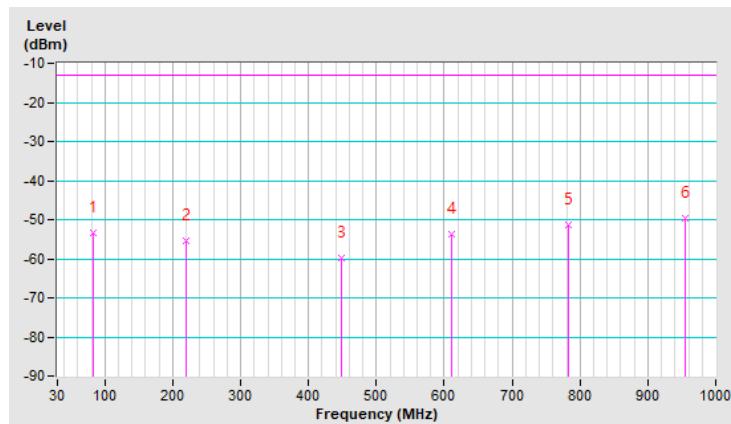


RF Mode	TX LTE Band 25-20MHz	Channel	CH 26590 : 1905 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.61	-52.73	-13.00	-39.73	1.09 V	145	55.44	-108.17
2	224.00	-60.23	-13.00	-47.23	1.06 V	31	51.52	-111.75
3	493.66	-58.84	-13.00	-45.84	1.16 V	174	42.62	-101.46
4	729.37	-53.11	-13.00	-40.11	1.38 V	34	43.41	-96.52
5	878.75	-51.07	-13.00	-38.07	1.03 V	264	42.79	-93.86
6	971.87	-49.93	-13.00	-36.93	1.28 V	288	42.31	-92.24

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

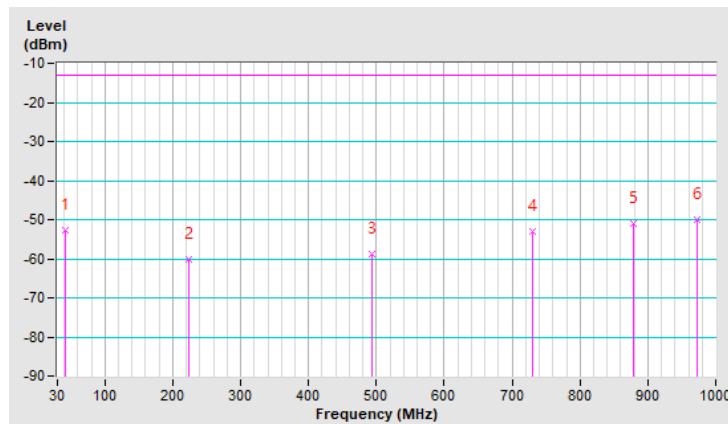

Above 1GHz

WCDMA Band 2

RF Mode	TX WCDMA Band 2	Channel	CH 9262 : 1852.4 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3704.80	-57.29	-13.00	-44.29	3.74 H	223	58.45	-115.74
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3704.80	-54.51	-13.00	-41.51	2.63 V	194	61.23	-115.74

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX WCDMA Band 2	Channel	CH 9400 : 1880 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-56.93	-13.00	-43.93	1.45 H	119	58.64	-115.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-54.12	-13.00	-41.12	3.23 V	227	61.45	-115.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX WCDMA Band 2	Channel	CH 9538 : 1907.6 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.20	-57.07	-13.00	-44.07	2.81 H	171	58.34	-115.41
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.20	-54.09	-13.00	-41.09	3.15 V	193	61.32	-115.41

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2

RF Mode	TX LTE Band 2-1.4MHz	Channel	CH 18607 : 1850.7 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-57.01	-13.00	-44.01	2.04 H	169	58.75	-115.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-54.50	-13.00	-41.50	3.35 V	287	61.26	-115.76

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 2-1.4MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-56.59	-13.00	-43.59	3.25 H	207	58.98	-115.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-54.45	-13.00	-41.45	1.06 V	310	61.12	-115.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 2-1.4MHz	Channel	CH 19193 : 1909.3 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-56.87	-13.00	-43.87	1.87 H	221	58.54	-115.41
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-56.86	-13.00	-43.86	1.37 V	196	58.55	-115.41

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 2-5MHz	Channel	CH 18625 : 1852.5 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-55.62	-13.00	-42.62	2.31 H	187	60.12	-115.74
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-53.17	-13.00	-40.17	1.72 V	223	62.57	-115.74

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 2-5MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-55.03	-13.00	-42.03	2.39 H	141	60.54	-115.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-52.70	-13.00	-39.70	1.52 V	45	62.87	-115.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 2-5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-55.09	-13.00	-42.09	2.39 H	141	60.32	-115.41
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-53.63	-13.00	-40.63	1.46 V	220	61.78	-115.41

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 2-20MHz	Channel	CH 18700 : 1860 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-55.10	-13.00	-42.10	3.09 H	320	60.60	-115.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-52.68	-13.00	-39.68	2.21 V	237	63.02	-115.70

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 2-20MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-54.82	-13.00	-41.82	2.83 H	276	60.75	-115.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-52.42	-13.00	-39.42	1.89 V	223	63.15	-115.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 2-20MHz	Channel	CH 19100 : 1900 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-54.82	-13.00	-41.82	3.16 H	220	60.63	-115.45
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-53.40	-13.00	-40.40	2.10 V	229	62.05	-115.45

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ $20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 25

RF Mode	TX LTE Band 25-1.4MHz	Channel	CH 26047 : 1850.7 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-56.89	-13.00	-43.89	1.41 H	220	58.87	-115.76

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-56.20	-13.00	-43.20	1.41 V	220	59.56	-115.76

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 25-1.4MHz	Channel	CH 26365 : 1882.5 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-56.45	-13.00	-43.45	3.87 H	210	59.12	-115.57

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-54.79	-13.00	-41.79	2.04 V	132	60.78	-115.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 25-1.4MHz	Channel	CH 26683 : 1914.3 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-56.73	-13.00	-43.73	1.47 H	208	58.65	-115.38
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3828.60	-55.15	-13.00	-42.15	1.78 V	225	60.23	-115.38

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 25-5MHz	Channel	CH 26065 : 1852.5 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-56.42	-13.00	-43.42	2.06 H	184	59.32	-115.74
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-55.70	-13.00	-42.70	1.19 V	235	60.04	-115.74

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 25-5MHz	Channel	CH 26365 : 1882.5 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-56.44	-13.00	-43.44	1.97 H	220	59.13	-115.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-54.56	-13.00	-41.56	1.97 V	220	61.01	-115.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 25-5MHz	Channel	CH 26665 : 1912.5 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-55.93	-13.00	-42.93	2.42 H	137	59.46	-115.39
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-54.82	-13.00	-41.82	3.52 V	141	60.57	-115.39

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 25-20MHz	Channel	CH 26140 : 1860 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-56.22	-13.00	-43.22	1.96 H	309	59.48	-115.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-55.10	-13.00	-42.10	1.05 V	252	60.60	-115.70

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + $20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 25-20MHz	Channel	CH 26365 : 1882.5 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-55.99	-13.00	-42.99	1.42 H	341	59.58	-115.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-54.41	-13.00	-41.41	2.31 V	274	61.16	-115.57

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + $20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band 25-20MHz	Channel	CH 26590 : 1905 MHz
Frequency Range	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-55.54	-13.00	-42.54	2.92 H	145	59.88	-115.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-54.36	-13.00	-41.36	3.35 V	214	61.06	-115.42

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---