

FCC Test Report

(PART 90S)

Report No.: RFBGSN-WTW-P21120080-10

FCC ID: 2AX8C-3545

Test Model: FL44TE

Received Date: Dec. 09, 2021

Test Date: Dec. 13, 2021 ~ Jan. 10, 2022

Issued Date: Jan. 24, 2022

Applicant: Amazon.com Services LLC

Address: 410 Terry Ave N, Seattle, Washington 98109

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 General Description of Applied Standards and references	11
4 Test Types and Results	12
4.1 Output Power Measurement	12
4.1.1 Limits of Output Power Measurement	12
4.1.2 Test Procedures	12
4.1.3 Test Setup	12
4.1.4 Test Results	13
4.2 Modulation Characteristics Measurement	15
4.2.1 Limits of Modulation Characteristics	15
4.2.2 Test Setup	15
4.2.3 Test Procedure	15
4.2.4 Test Results	15
4.3 Frequency Stability Measurement	16
4.3.1 Limits of Frequency Stability Measurement	16
4.3.2 Test Procedure	16
4.3.3 Test Setup	16
4.3.4 Test Results	17
4.4 Occupied Bandwidth Measurement	21
4.4.1 Limits of Occupied Bandwidth Measurement	21
4.4.2 Test Procedure	21
4.4.3 Test Setup	21
4.4.4 Test Results	22
4.5 Emission Mask Measurement	24
4.5.1 Limits of Emission Mask Measurement	24
4.5.2 Test Setup	24
4.5.3 Test Procedures	24
4.5.4 Test Results	25
4.6 Conducted Spurious Emissions	29
4.6.1 Limits of Conducted Spurious Emissions Measurement	29
4.6.2 Test Setup	29
4.6.3 Test Procedure	29
4.6.4 Test Results	30
4.7 Radiated Emission Measurement	34
4.7.1 Limits of Radiated Emission Measurement	34
4.7.2 Test Procedure	34
4.7.3 Deviation from Test Standard	34
4.7.4 Test Setup	35
4.7.5 Test Results	36
5 Pictures of Test Arrangements	42
Appendix – Information of the Testing Laboratories	43

Release Control Record

Issue No.	Description	Date Issued
RFBGSN-WTW-P21120080-10	Original Release	Jan. 24, 2022

1 Certificate of Conformity

Product: Fleet Edge

Brand: N/A

Test Model: FL44TE

Sample Status: Engineering Sample

Applicant: Amazon.com Services LLC

Test Date: Dec. 13, 2021 ~ Jan. 10, 2022

Standards: FCC Part 90, Subpart I, S
FCC Part 2

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu , **Date:** Jan. 24, 2022
Gina Liu / Specialist

Approved by : Jeremy Lin , **Date:** Jan. 24, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2 (LTE 26)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth	Pass	Meet the requirement of limit.
2.1051 90.691	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -31.01 dB at 163.86 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Sep. 22, 2021	Sep. 21, 2022
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 03, 2021	Dec. 02, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 12, 2021	Apr. 11, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 14, 2021	Nov. 13, 2022
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Oct. 28, 2021	Oct. 27, 2022
HORN Antenna SCHWARZBECK	BBHA 9120 D	209	Nov. 14, 2021	Nov. 13, 2022
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 13, 2021	Apr. 12, 2022
Loop Antenna	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC 012645	980115	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 184045	980116	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 330H	980112	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable EMCI	EMC104-SM-SM-8000	171005	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-100 0(140807)	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 05, 2021	Oct. 04, 2022
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 26, 2021	Aug. 25, 2022
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Feb. 07, 2021	Feb. 06, 2022
Temperature & Humidity Chamber GIANT FORCE	GTH-120-40-CP-AR	MAA1306-019	Sep. 10, 2021	Sep. 09, 2022
DC power supply Keysight	U8002A	MY56330015	NA	NA
Digital Multimeter Fluke	87-III	70360742	Jun. 24, 2021	Jun. 23, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	Fleet Edge	
Brand	N/A	
Test Model	FL44TE	
Status of EUT	Engineering Sample	
Power Supply Rating	12 Vdc (Power Supply)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
	LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
	LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
	LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
Emission Designator	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 26 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 26 (Channel Bandwidth: 5 MHz)	4M50G7D
	LTE Band 26 (Channel Bandwidth: 10 MHz)	8M99D7W
Max. ERP Power	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	250.611 mW (23.99dBm)
	LTE Band 26 (Channel Bandwidth: 3 MHz)	257.632 mW (24.11dBm)
	LTE Band 26 (Channel Bandwidth: 5 MHz)	256.448 mW (24.09dBm)
	LTE Band 26 (Channel Bandwidth: 10 MHz)	260.615 mW (24.16dBm)
Antenna Type	Refer to Note as below	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. The EUT contains following accessory devices.


Product	Brand	Model	Description
BT/WLAN Module	Intel	9560NGW	802.11 a/b/g/n/ac Wireless LAN + Bluetooth 5
WWAN Module	Quectel	EM06-A	WCDMA, LTE
CPU	Intel	i5-9500TE	CFL-S, 6C 35W
SO-DIMM	Innodisk	--	2667MHz, 8G&16G
LTE Main Antenna	Rivian	N/A	Cable length: 2445mm P/N: J7-1
LTE Aux Antenna	Rivian	N/A	Cable length: 3520mm P/N: J6-1
WiFi Main Antenna	Rivian	PT00206181-A	Cable length: 3550mm P/N: J5-1
WiFi Aux Antenna	Rivian	PT00207642-A	Cable length: 2475mm P/N: J4-1

2. The antenna information is listed as below.

Antenna information		Antenna gain (dBi)
Type	Ant.	LTE 26
Multiband Antennas	Main	1.11
	Aux	2.37

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

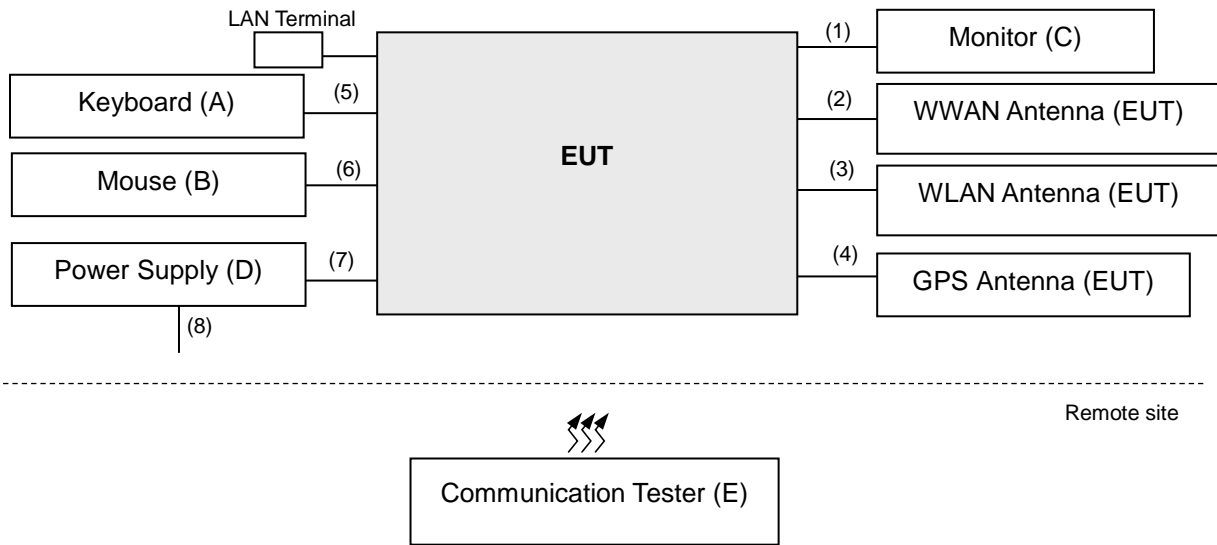

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Keyboard	Lenovo	KB1021	N/A	N/A	--
B	Mouse	DELL	MS111-P	CN-011D3V-71581-1CJ-092E	N/A	--
C	Monitor	HP	HP Z24s	6CM5172L56	N/A	--
D	Power Supply	NA	NA	NA	N/A	--
E	Communication Tester	R&S	CMU200	123295	N/A	For WCDMA
		ANRITSU	MT8821C	6201462755	N/A	For LTE

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	HDMI Cable	1	2 m	N	0	-
2.	RF Cable	1	2445 mm	N	0	Accessory of the EUT
		1	3520 mm	N	0	Accessory of the EUT
3.	RF Cable	1	3550 mm	N	0	Accessory of the EUT
		1	2475 mm	N	0	Accessory of the EUT
4.	RF Cable	1	0.5 m	N	0	Accessory of the EUT
5.	USB Cable	1	2.4 m	N	0	-
6.	USB Cable	1	2.2 m	N	0	-
7.	DC power Cable	1	1.2 m	N	0	-
8.	AC power Cable	1	1.8 m	N	0	-

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned on X-plane for ERP and X-plane for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Frequency Stability	26697 to 26783	26697, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Emission Mask	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Conducted Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only ERP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Frequency Stability	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Occupied Bandwidth	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Peak to Average Ratio	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Emission Mask	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Band Edge	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Conducted Emission	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tim Chen, Thomas Cheng

3.4 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 90

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 971168 D02 Misc Rev Approv License Devices v02r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw) ERP.

4.1.2 Test Procedures

Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

$$\text{ERP} = P_{\text{Meas}} + G_{\text{T}} - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

EIRP / ERP Measurement:

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

LTE Band 26																		
BW	MCS Index	RB Size	RB Offset	Mid			3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)			
				Channel								26740	26715	26740		26765		
				Frequency (MHz)								819.0	816.5	819.0		821.5		
10M	QPSK	1	0		23.94		0	5M	QPSK	1	0	23.84	23.83	23.87	0			
		1	24		23.84		0			1	12	23.63	23.65	23.78	0			
		1	49		23.56		0			1	24	23.68	23.65	23.73	0			
		25	0		22.85		1			12	0	22.84	22.81	22.91	1			
		25	12		22.82		1			12	6	22.75	22.77	22.96	1			
		25	25		22.68		1			12	13	22.84	22.82	23.08	1			
		50	0		22.80		1			25	0	22.67	22.74	22.94	1			
	16QAM	1	0		23.25		1		16QAM	1	0		23.15	23.12	23.21	1		
		1	24		23.01		1			1	12	23.01	22.91	23.00	1			
		1	49		22.86		1			1	24	23.09	23.02	23.04	1			
		25	0		21.94		2			12	0	21.88	21.84	21.79	2			
		25	12		21.76		2			12	6	21.96	21.92	21.77	2			
		25	25		21.67		2			12	13	21.74	21.75	21.55	2			
		50	0		21.82		2			25	0	21.97	21.94	21.83	2			
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)			
				Channel								26705	26740	26775		26697	26740	26783
				Frequency (MHz)								815.5	819.0	822.5		814.7	819.0	823.3
3M	QPSK	1	0	23.89	23.88	22.96	0	1.4M	QPSK	1	0	23.77	23.67	23.64	0			
		1	7	23.88	23.80	22.79	0			1	2	23.66	23.61	23.68	0			
		1	14	23.78	23.74	22.64	0			1	5	23.59	23.58	23.69	0			
		8	0	22.69	22.74	21.62	1			3	0	23.64	23.59	23.68	0			
		8	3	22.84	22.87	21.76	1			3	1	23.56	23.51	23.55	0			
		8	7	22.59	22.71	21.60	1			3	3	23.62	23.61	23.69	0			
		15	0	22.66	22.77	21.72	1			6	0	22.80	22.75	22.78	1			
	16QAM	1	0	23.45	23.82	22.40	1		16QAM	1	0		22.91	22.96	22.81	1		
		1	7	23.27	23.74	22.24	1			1	2	22.63	22.74	22.50	1			
		1	14	23.21	23.67	22.21	1			1	5	22.66	22.83	22.55	1			
		8	0	22.21	22.74	21.19	2			3	0	22.38	22.65	22.37	1			
		8	3	22.30	22.76	21.15	2			3	1	22.66	22.87	22.54	1			
		8	7	22.26	22.72	21.06	2			3	3	22.50	22.75	22.42	1			
		15	0	22.32	22.76	21.09	2			6	0	21.54	21.84	21.59	2			

ERP Power (dBm)

LTE Band 26

BW	MCS Index	RB Size	RB Offset				3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26740						26715	26740	26765			
		Frequency (MHz)		819.0						816.5	819.0	821.5			
10M	QPSK	1	0		24.16		0	5M	QPSK	1	0	24.06	24.05	24.09	0
		1	24		24.06		0			1	12	23.85	23.87	24.00	0
		1	49		23.78		0			1	24	23.90	23.87	23.95	0
		25	0		23.07		1			12	0	23.06	23.03	23.13	1
		25	12		23.04		1			12	6	22.97	22.99	23.18	1
		25	25		22.90		1			12	13	23.06	23.04	23.30	1
		50	0		23.02		1			25	0	22.89	22.96	23.16	1
	16QAM	1	0		23.47		1		16QAM	1	0	23.37	23.34	23.43	1
		1	24		23.23		1			1	12	23.23	23.13	23.22	1
		1	49		23.08		1			1	24	23.31	23.24	23.26	1
		25	0		22.16		2			12	0	22.10	22.06	22.01	2
		25	12		21.98		2			12	6	22.18	22.14	21.99	2
		25	25		21.89		2			12	13	21.96	21.97	21.77	2
		50	0		22.04		2			25	0	22.19	22.16	22.05	2
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26705	26740	26775				26697	26740	26783			
		Frequency (MHz)		815.5	819.0	822.5				814.7	819.0	823.3			
3M	QPSK	1	0	24.11	24.10	23.18	0	1.4M	QPSK	1	0	23.99	23.89	23.86	0
		1	7	24.10	24.02	23.01	0			1	2	23.88	23.83	23.90	0
		1	14	24.00	23.96	22.86	0			1	5	23.81	23.80	23.91	0
		8	0	22.91	22.96	21.84	1			3	0	23.86	23.81	23.90	0
		8	3	23.06	23.09	21.98	1			3	1	23.78	23.73	23.77	0
		8	7	22.81	22.93	21.82	1			3	3	23.84	23.83	23.91	0
		15	0	22.88	22.99	21.94	1			6	0	23.02	22.97	23.00	1
	16QAM	1	0	23.67	24.04	22.62	1		16QAM	1	0	23.13	23.18	23.03	1
		1	7	23.49	23.96	22.46	1			1	2	22.85	22.96	22.72	1
		1	14	23.43	23.89	22.43	1			1	5	22.88	23.05	22.77	1
		8	0	22.43	22.96	21.41	2			3	0	22.60	22.87	22.59	1
		8	3	22.52	22.98	21.37	2			3	1	22.88	23.09	22.76	1
		8	7	22.48	22.94	21.28	2			3	3	22.72	22.97	22.64	1
		15	0	22.54	22.98	21.31	2			6	0	21.76	22.06	21.81	2

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

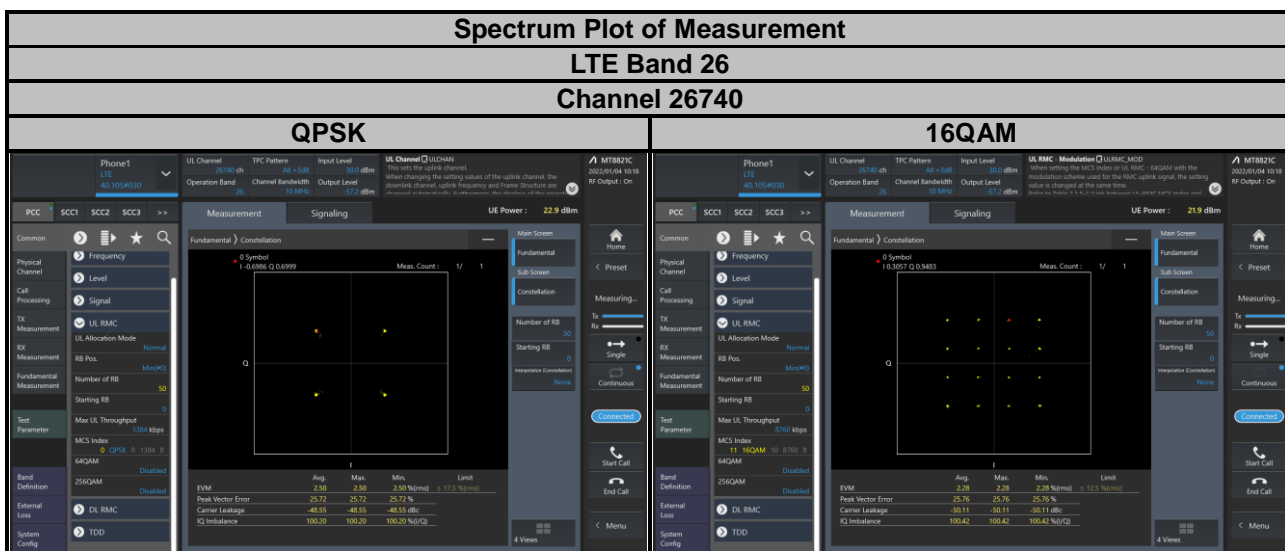

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

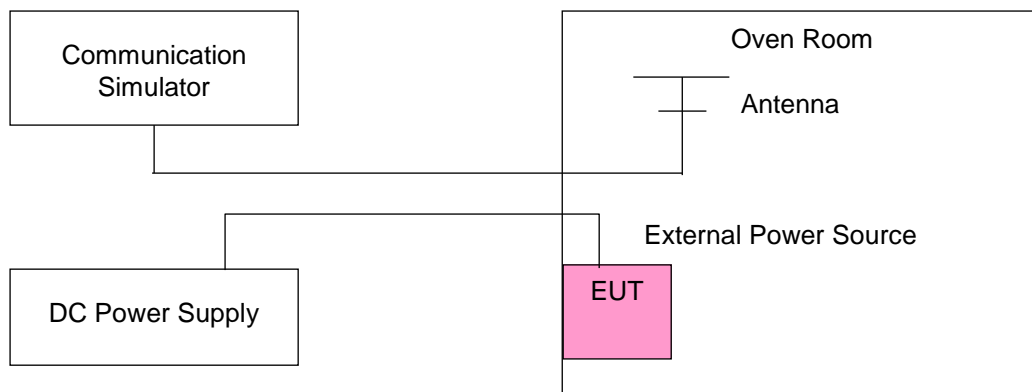

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	814.700002	0.003	823.300004	0.004
10.2	814.700002	0.002	823.300002	0.002
13.8	814.700002	0.002	823.300001	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	814.700002	0.003	823.300002	0.002
-20	814.700003	0.004	823.300003	0.004
-10	814.700002	0.002	823.300004	0.005
0	814.700002	0.003	823.300004	0.005
10	814.700004	0.005	823.300004	0.005
20	814.699997	-0.004	823.299997	-0.003
30	814.699998	-0.003	823.299997	-0.004
40	814.699997	-0.004	823.299996	-0.005
50	814.699999	-0.002	823.299999	-0.002
60	814.699998	-0.002	823.299998	-0.003
70	814.699996	-0.005	823.299998	-0.002
80	814.699996	-0.005	823.299999	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	815.500004	0.005	822.500004	0.005
10.2	815.500003	0.004	822.500004	0.005
13.8	815.500001	0.001	822.500002	0.003

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	815.500004	0.004	822.500003	0.004
-20	815.500003	0.004	822.500001	0.001
-10	815.500002	0.002	822.500001	0.002
0	815.500004	0.004	822.500001	0.002
10	815.500002	0.002	822.500002	0.002
20	815.499996	-0.005	822.499998	-0.002
30	815.499998	-0.002	822.499999	-0.001
40	815.499997	-0.004	822.499997	-0.004
50	815.499997	-0.003	822.499998	-0.002
60	815.499996	-0.004	822.499997	-0.004
70	815.499998	-0.002	822.499998	-0.003
80	815.499999	-0.002	822.499997	-0.004

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	816.500002	0.002	821.500001	0.001
10.2	816.500002	0.002	821.500002	0.002
13.8	816.500004	0.005	821.500001	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	816.500001	0.002	821.500003	0.004
-20	816.500002	0.002	821.500003	0.004
-10	816.500003	0.003	821.500001	0.001
0	816.500003	0.004	821.500002	0.002
10	816.500002	0.002	821.500001	0.002
20	816.499998	-0.002	821.499998	-0.003
30	816.499998	-0.003	821.499997	-0.004
40	816.499999	-0.001	821.499998	-0.002
50	816.499998	-0.003	821.499997	-0.003
60	816.499996	-0.005	821.499996	-0.005
70	816.499998	-0.003	821.499999	-0.002
80	816.499997	-0.004	821.499997	-0.004

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26	
	Channel Bandwidth: 10 MHz	
	Frequency (MHz)	Frequency Error (ppm)
12	819.000002	0.002
10.2	819.000003	0.004
13.8	819.000001	0.001

Note: The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26	
	Channel Bandwidth: 10 MHz	
	Frequency (MHz)	Frequency Error (ppm)
-30	819.000002	0.003
-20	819.000004	0.005
-10	819.000003	0.004
0	819.000004	0.004
10	819.000003	0.004
20	818.999997	-0.003
30	818.999998	-0.003
40	818.999998	-0.002
50	818.999998	-0.002
60	818.999998	-0.002
70	818.999996	-0.005
80	818.999998	-0.002

Note:

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

4.4 Occupied Bandwidth Measurement

4.4.1 Limits of Occupied Bandwidth Measurement


The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.2 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Measurement method, please refer to section 5.4.4 of ANSI C63.26. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

4.4.3 Test Setup

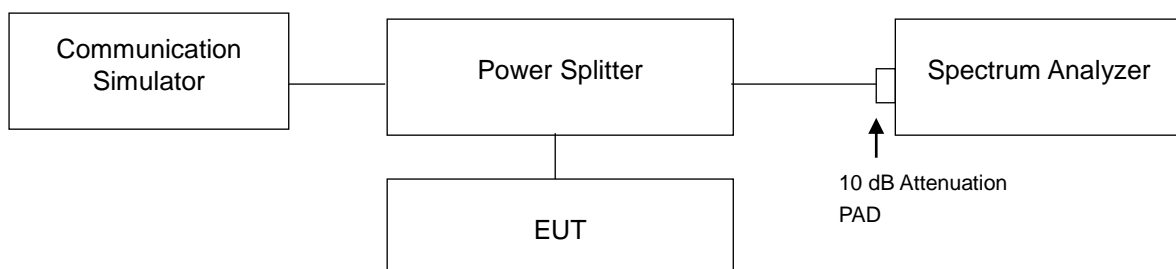


4.4.4 Test Results

LTE Band 26					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26697	814.7	1.09	1.09	1.23	1.22
26740	819.0	1.09	1.09	1.23	1.22
26783	823.3	1.09	1.09	1.22	1.21
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26705	815.5	2.70	2.70	2.92	2.95
26740	819.0	2.70	2.70	2.92	2.92
26775	822.5	2.70	2.70	2.92	2.93

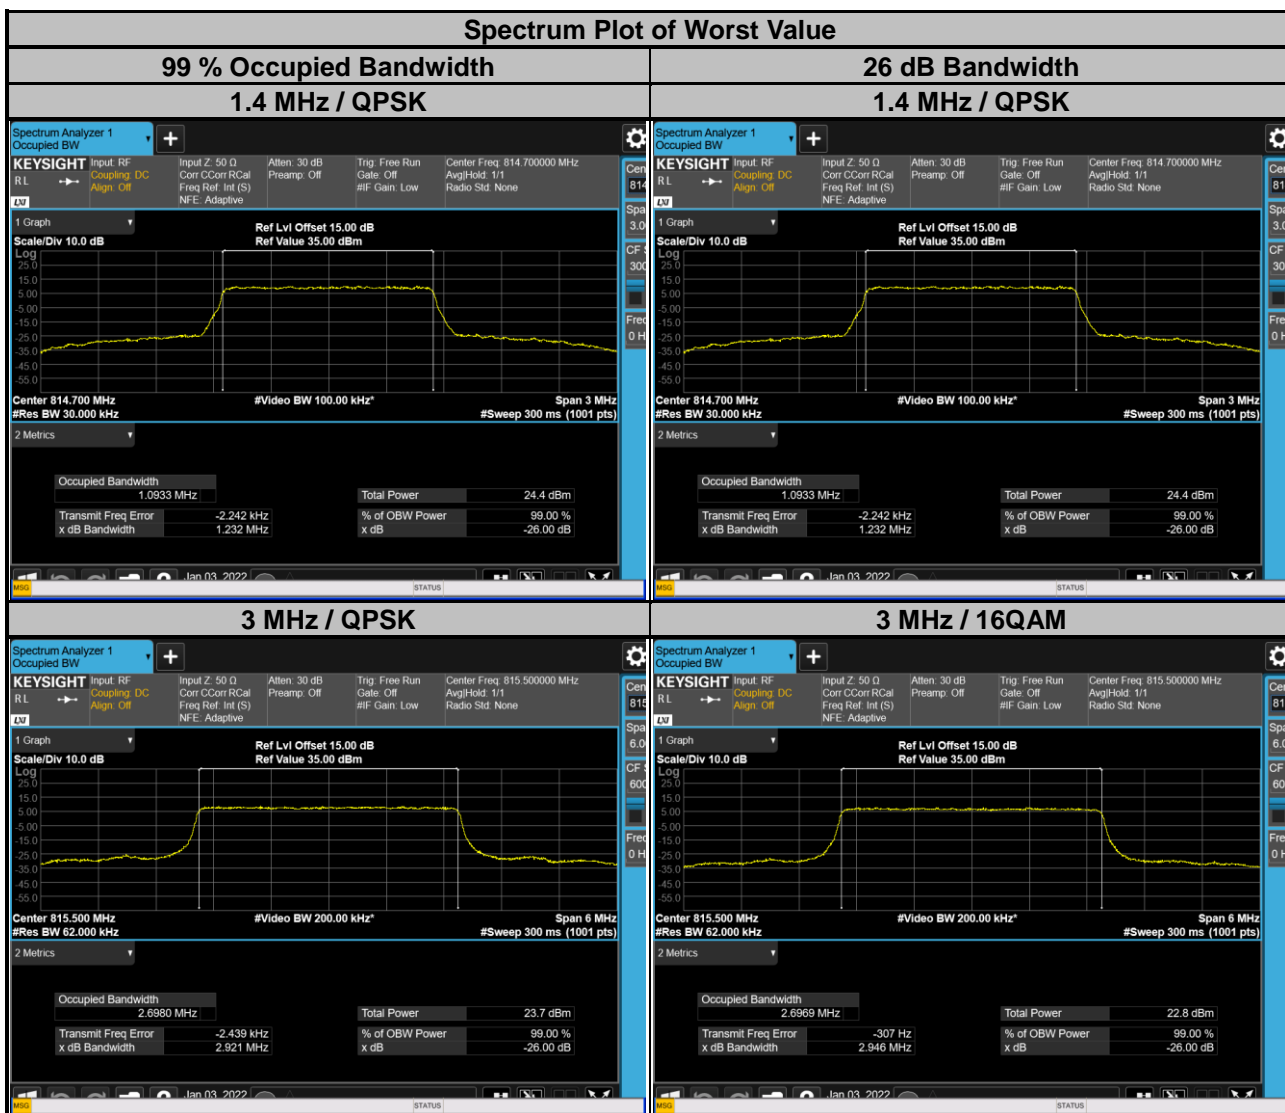

LTE Band 26					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26715	816.5	4.50	4.49	4.83	4.82
26740	819.0	4.50	4.49	4.84	4.81
26765	821.5	4.49	4.49	4.84	4.80
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26740	819.0	8.98	8.99	9.54	9.53

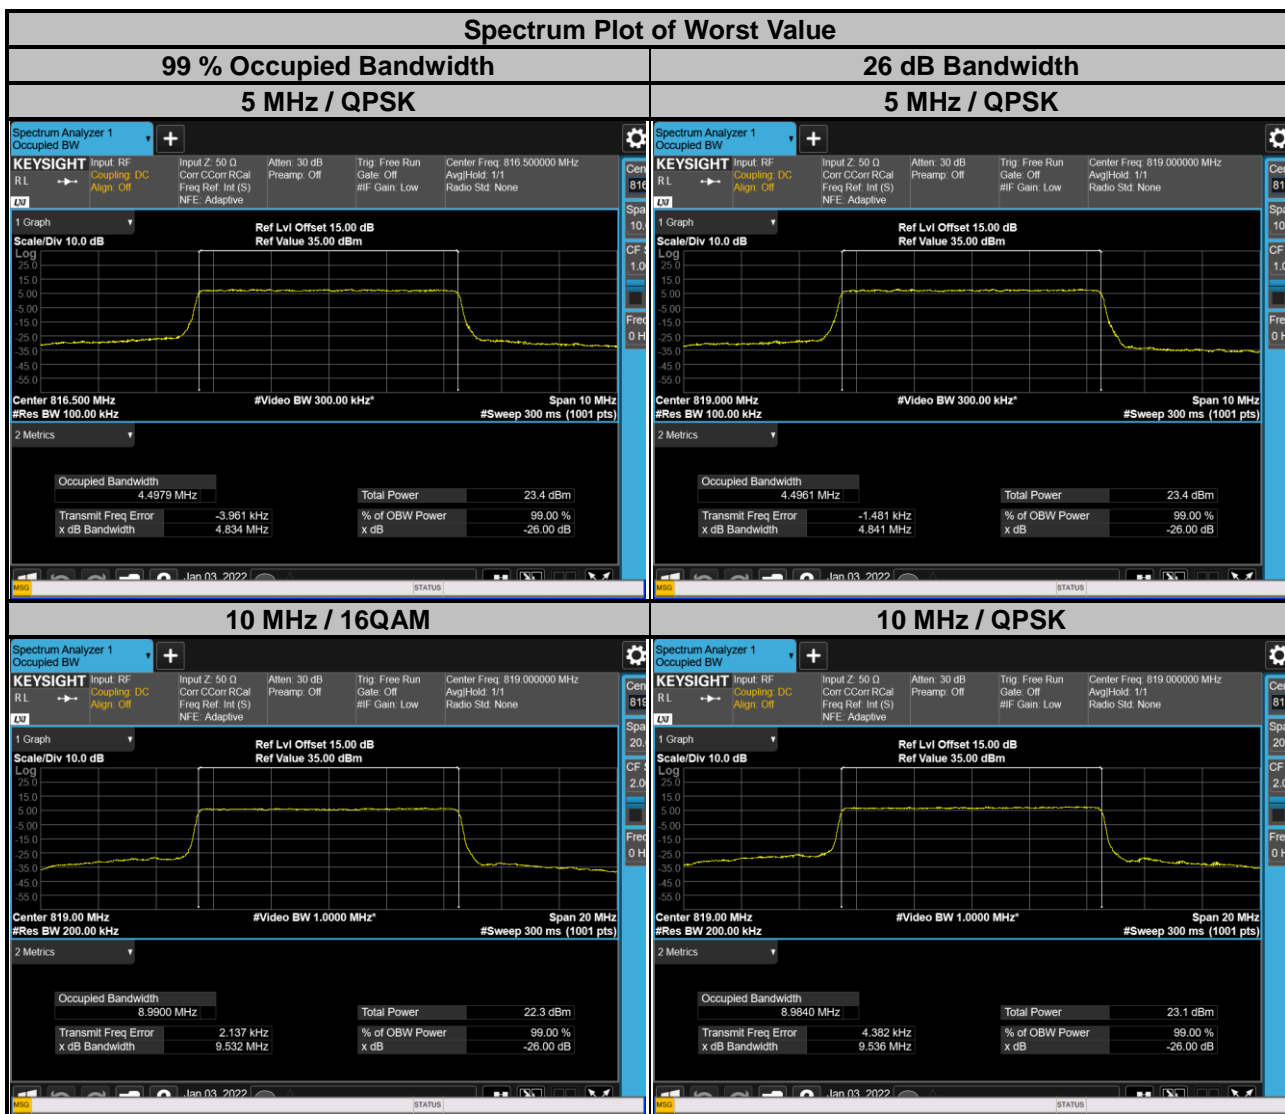

4.5 Emission Mask Measurement


4.5.1 Limits of Emission Mask Measurement

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10\text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

For §90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

4.5.2 Test Setup

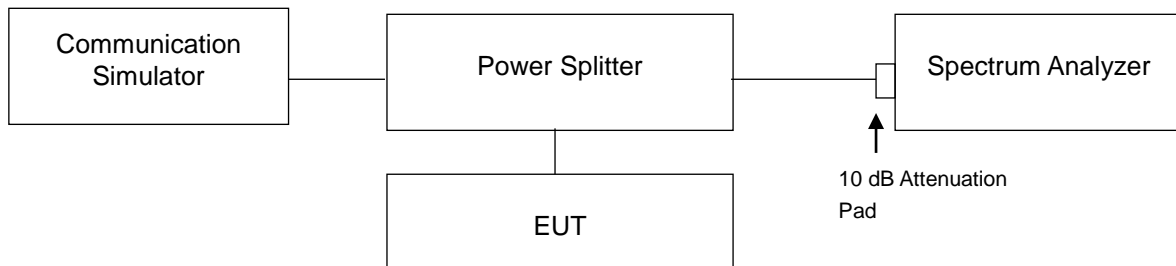

4.5.3 Test Procedures




- The measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the test plot.

4.5.4 Test Results




LTE Band 26

Channel Bandwidth: 3 MHz / QPSK

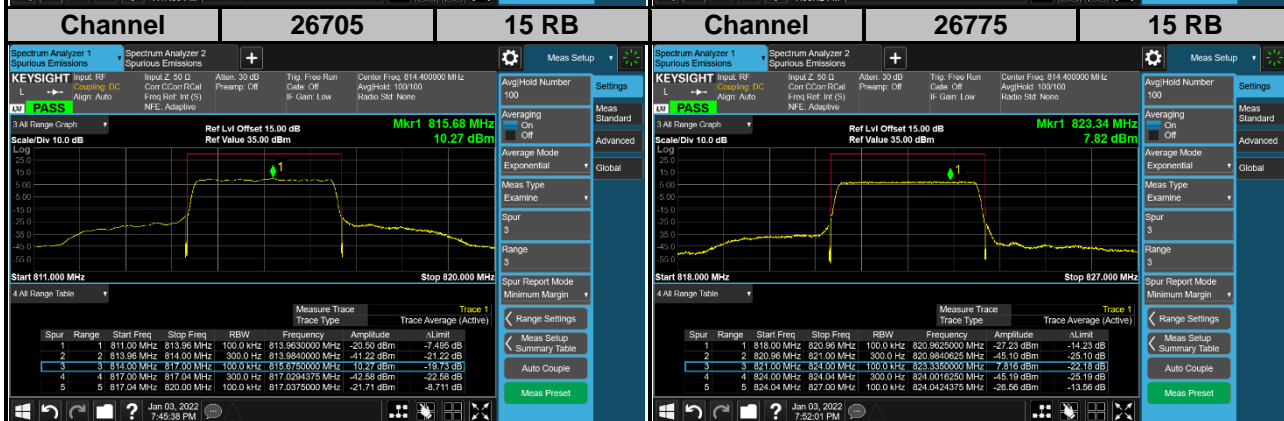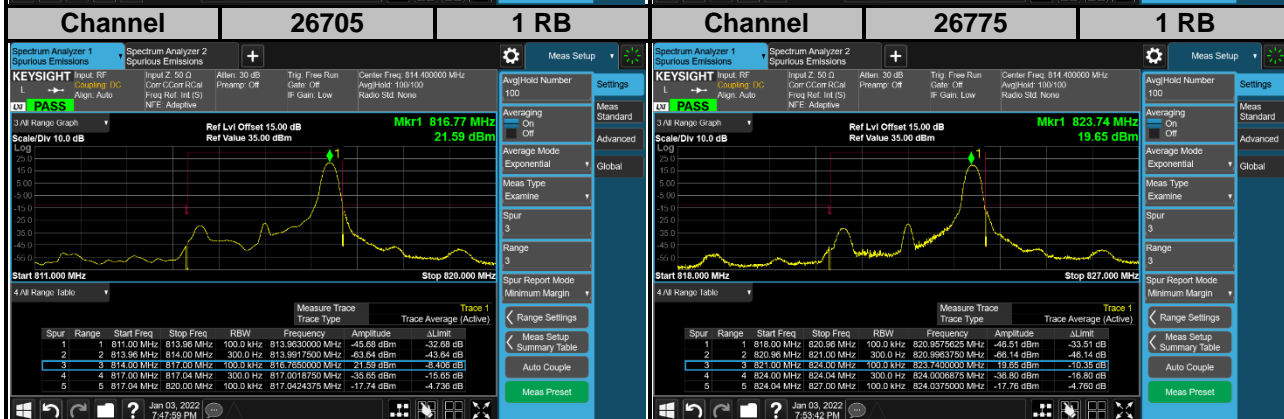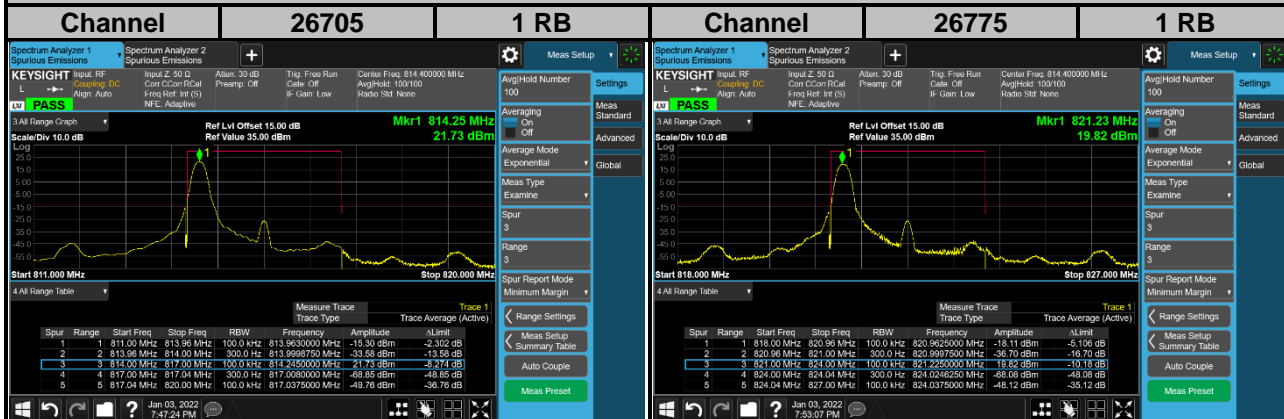


LTE Band 26

Channel Bandwidth: 5 MHz / QPSK

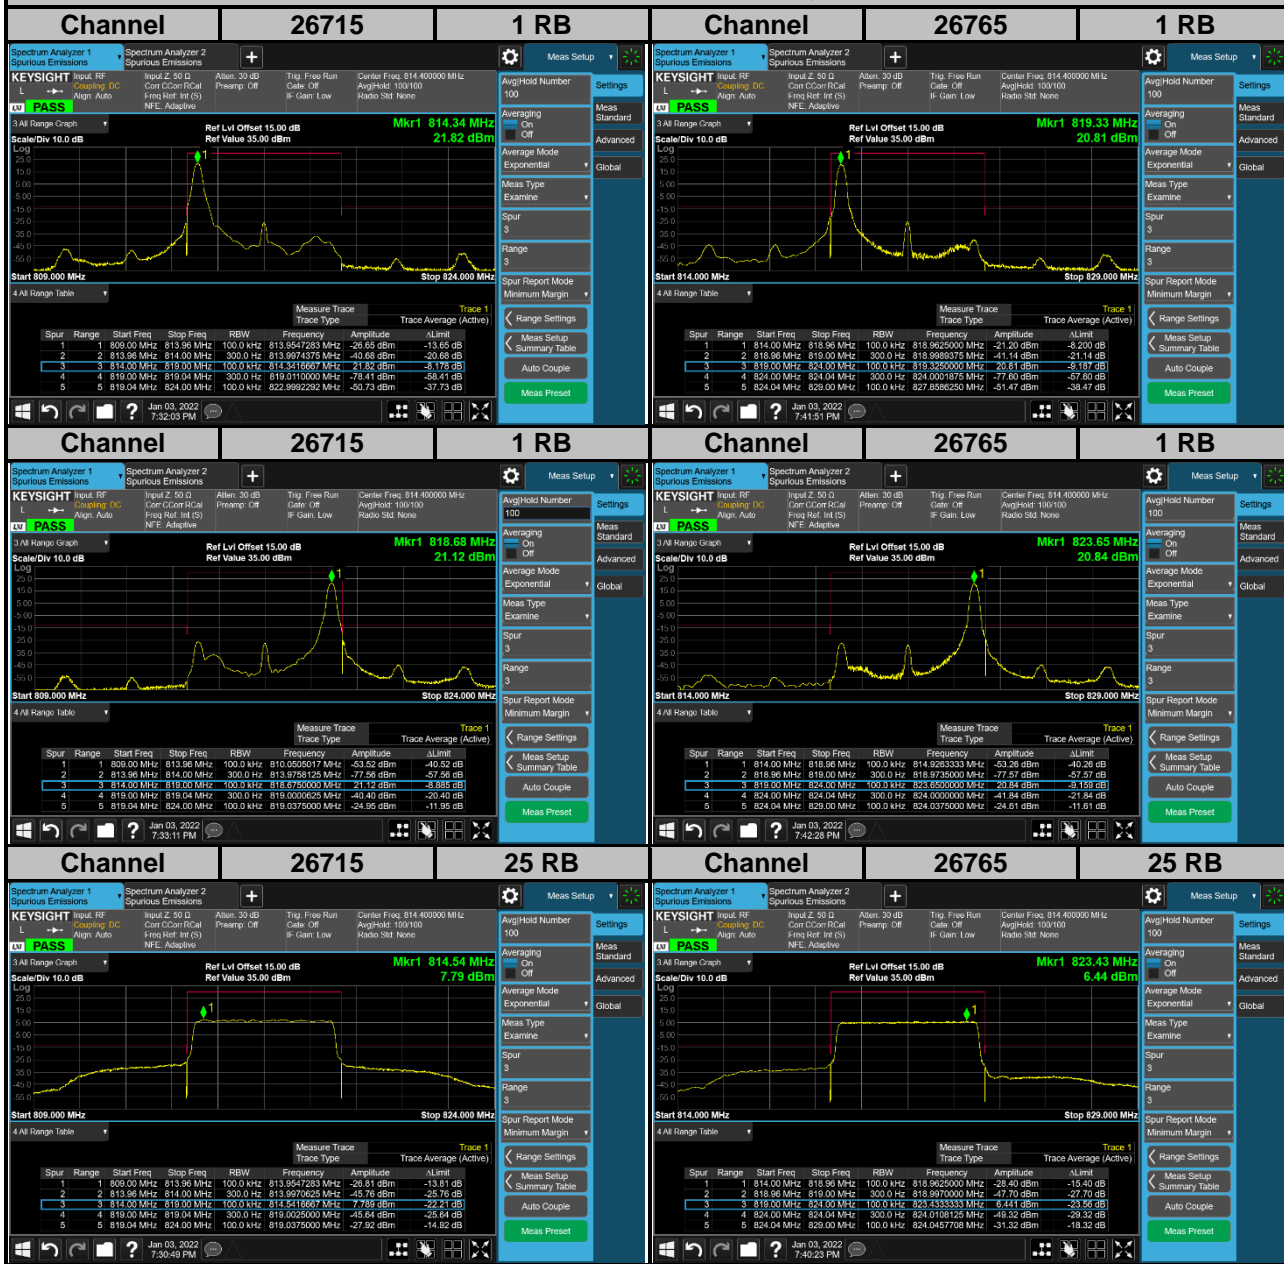

LTE Band 26
Channel Bandwidth: 10 MHz / QPSK

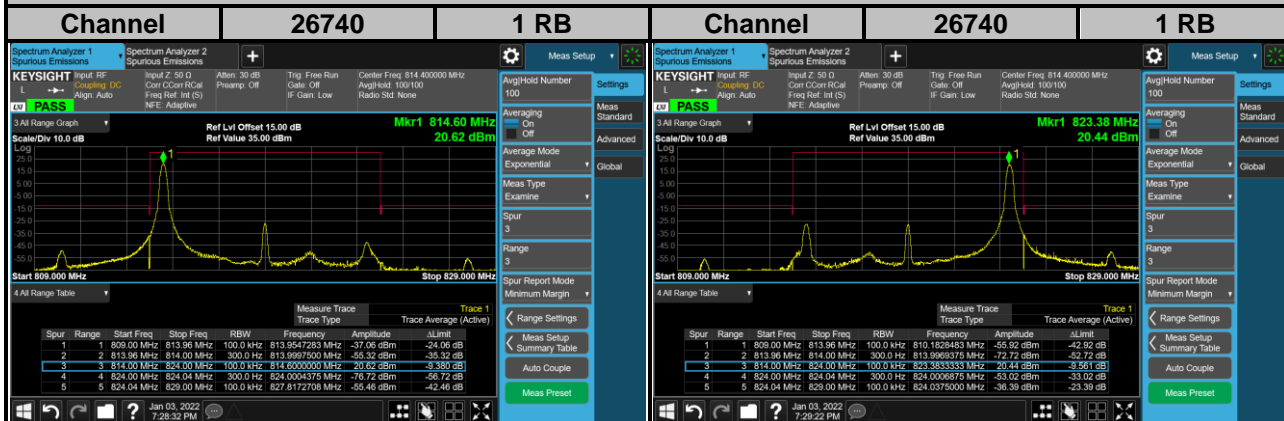


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.


4.6.2 Test Setup

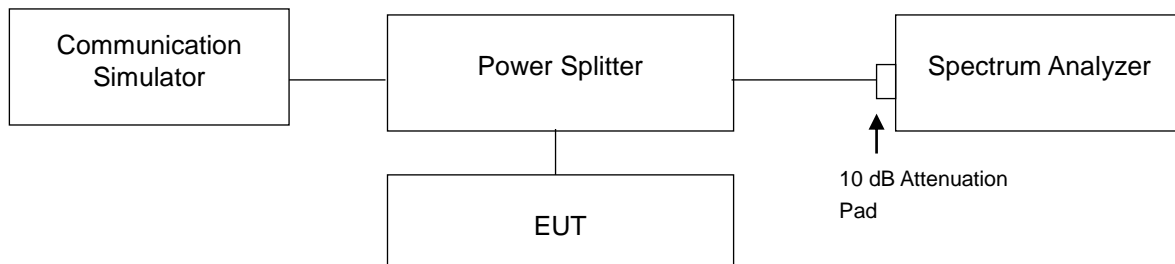

4.6.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.

4.6.4 Test Results

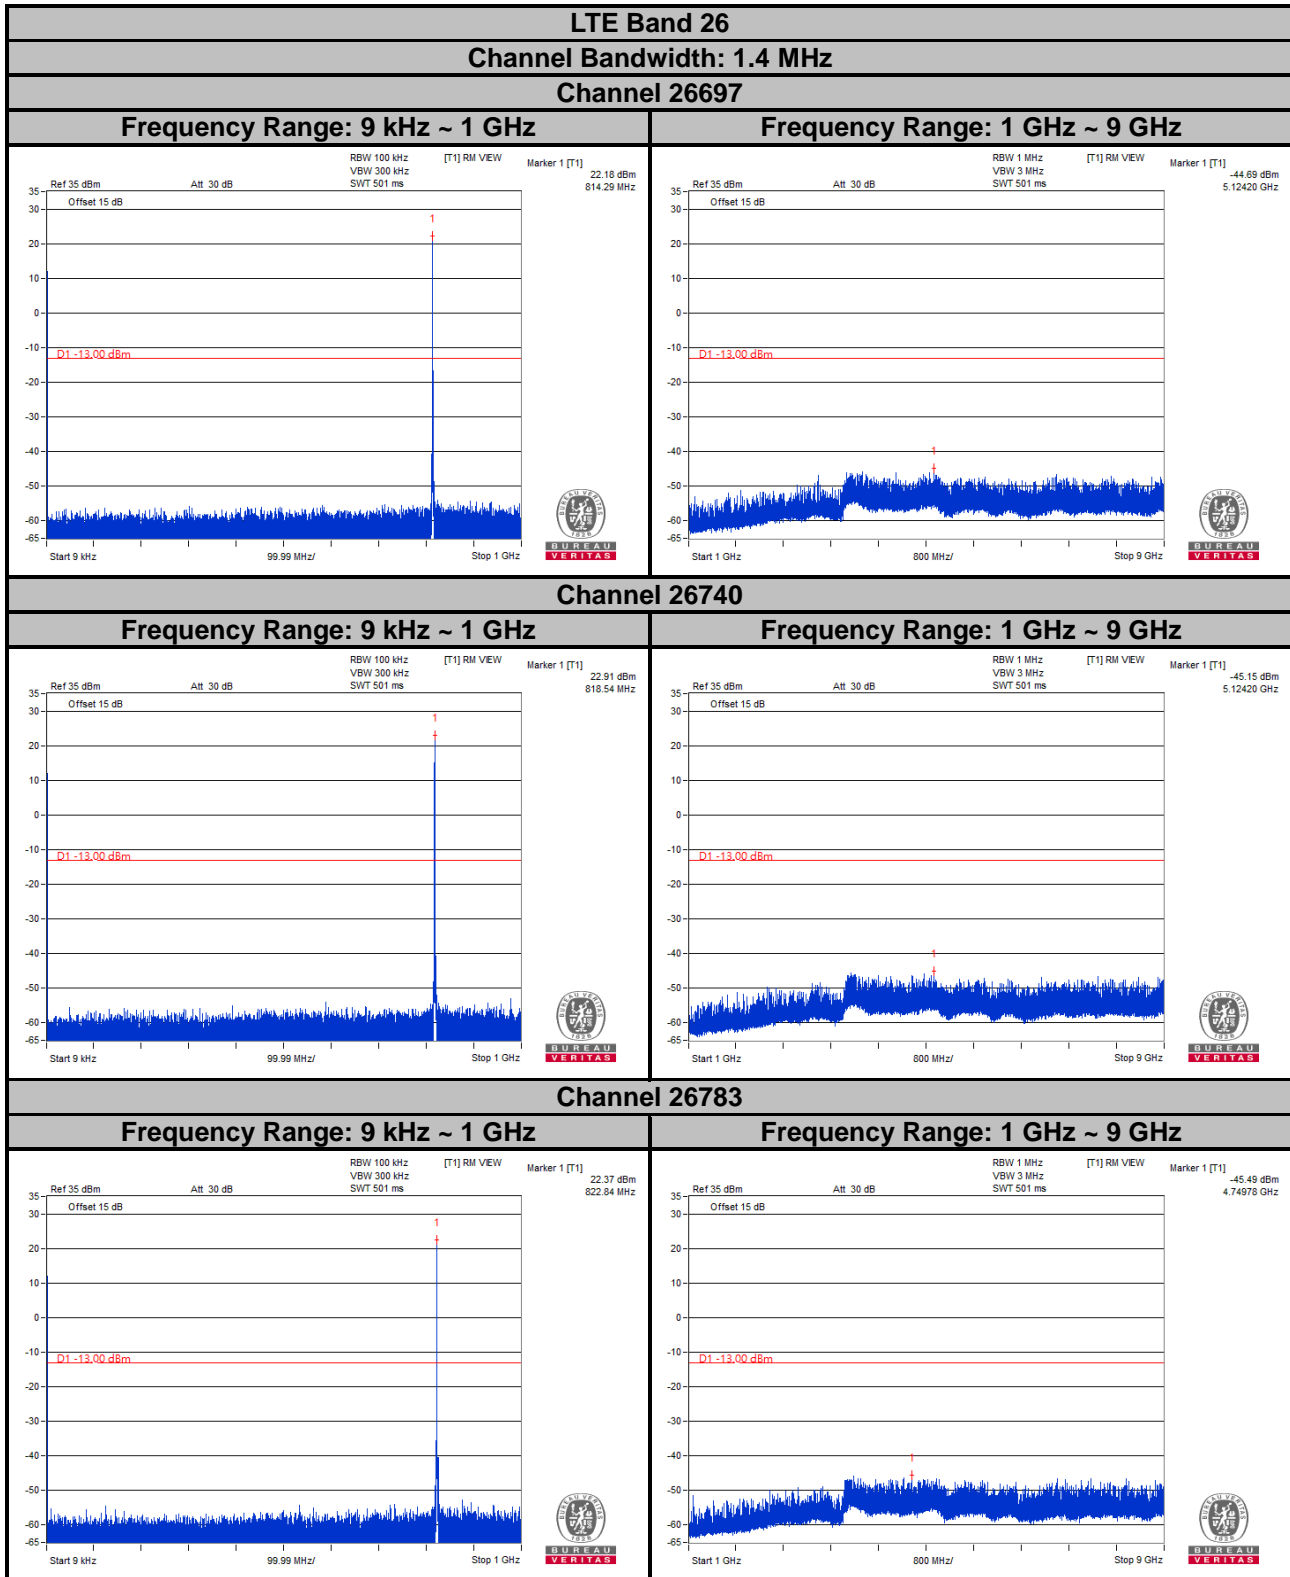


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 26
Channel Bandwidth: 3 MHz
Channel 26705

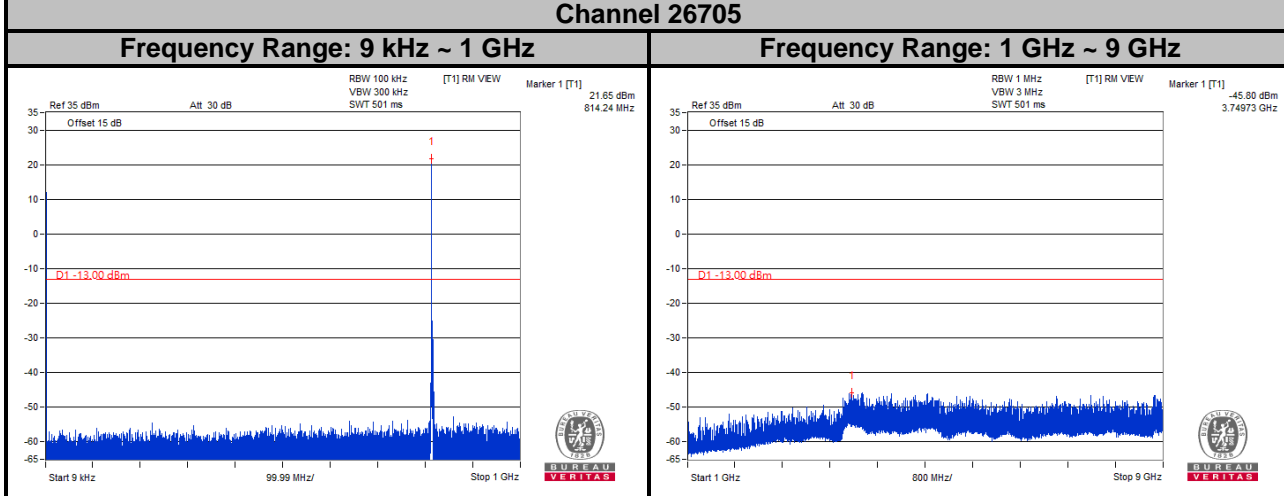

Channel 26740

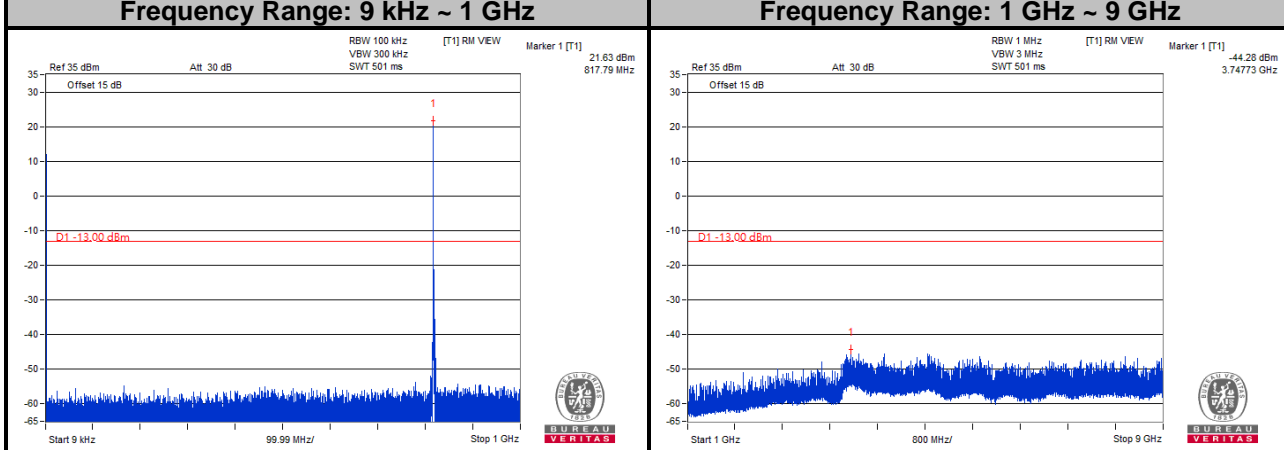


Channel 26775

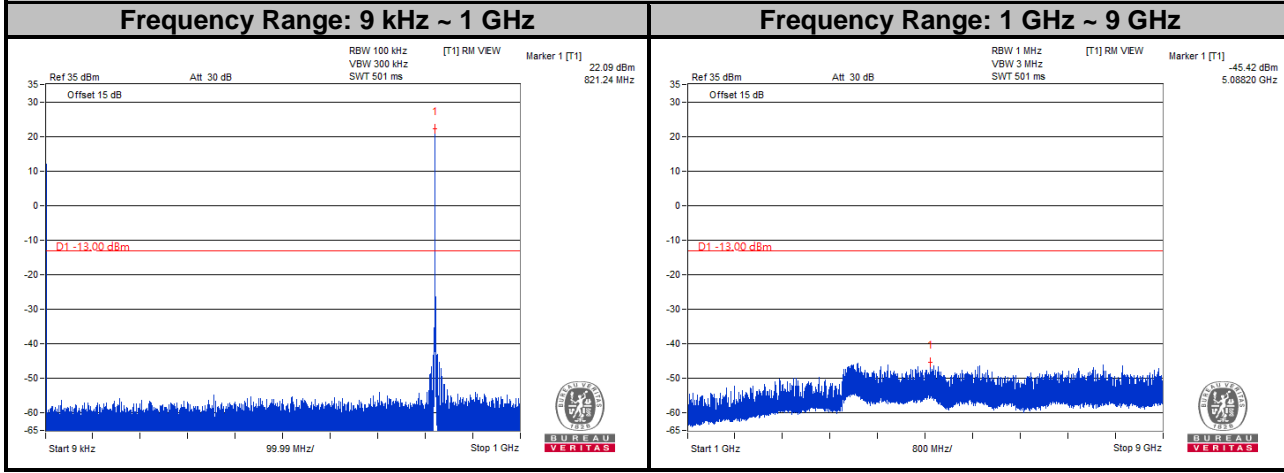


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 26
Channel Bandwidth: 5 MHz
Channel 26715

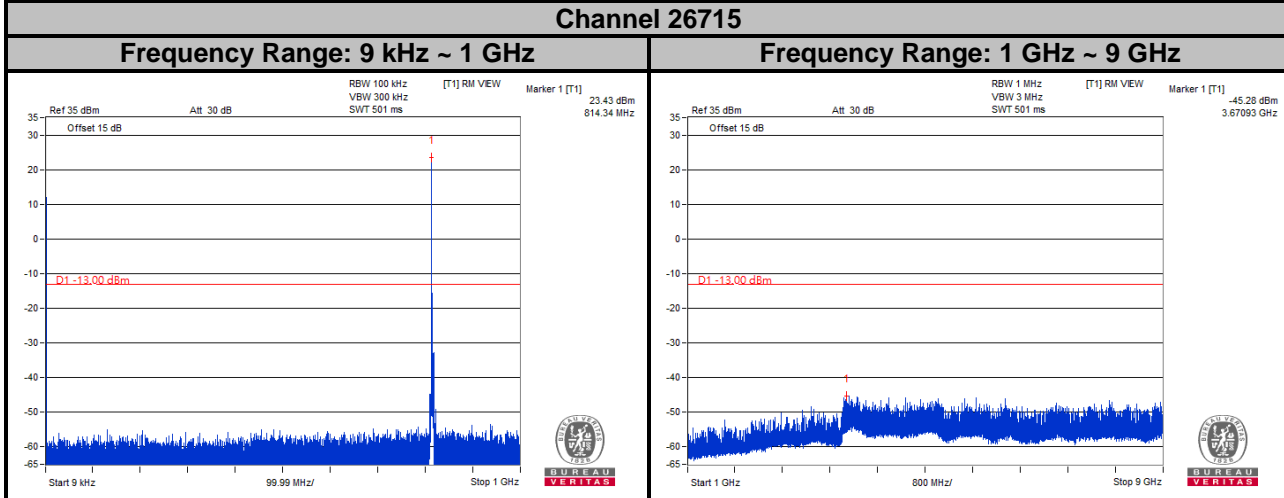


Channel 26740

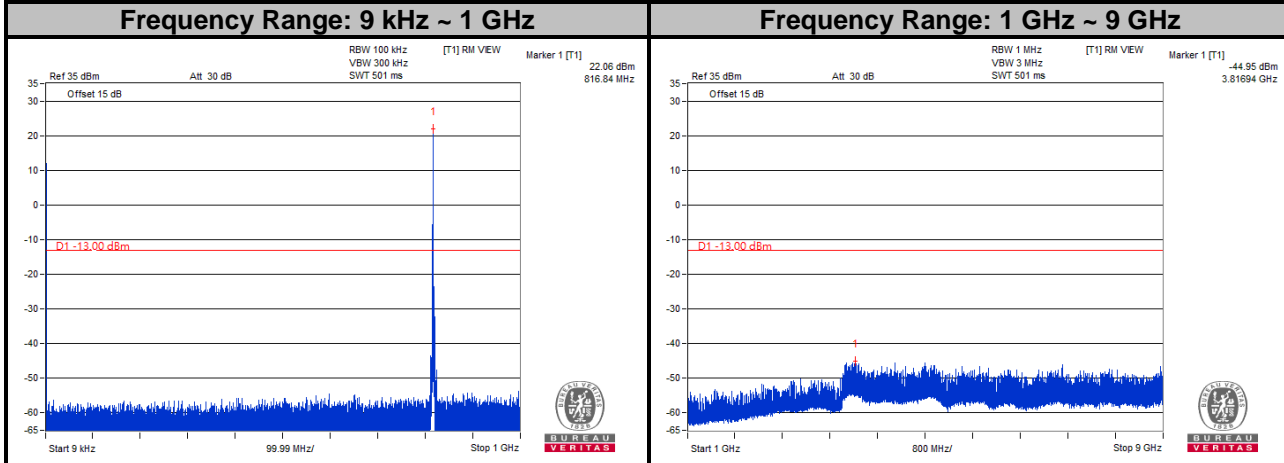

Channel 26765

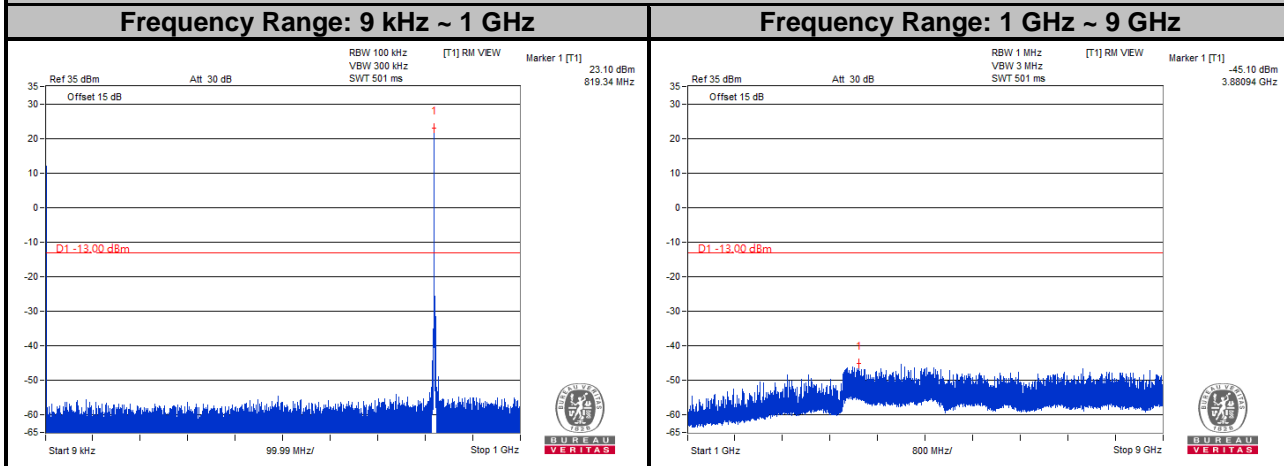

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

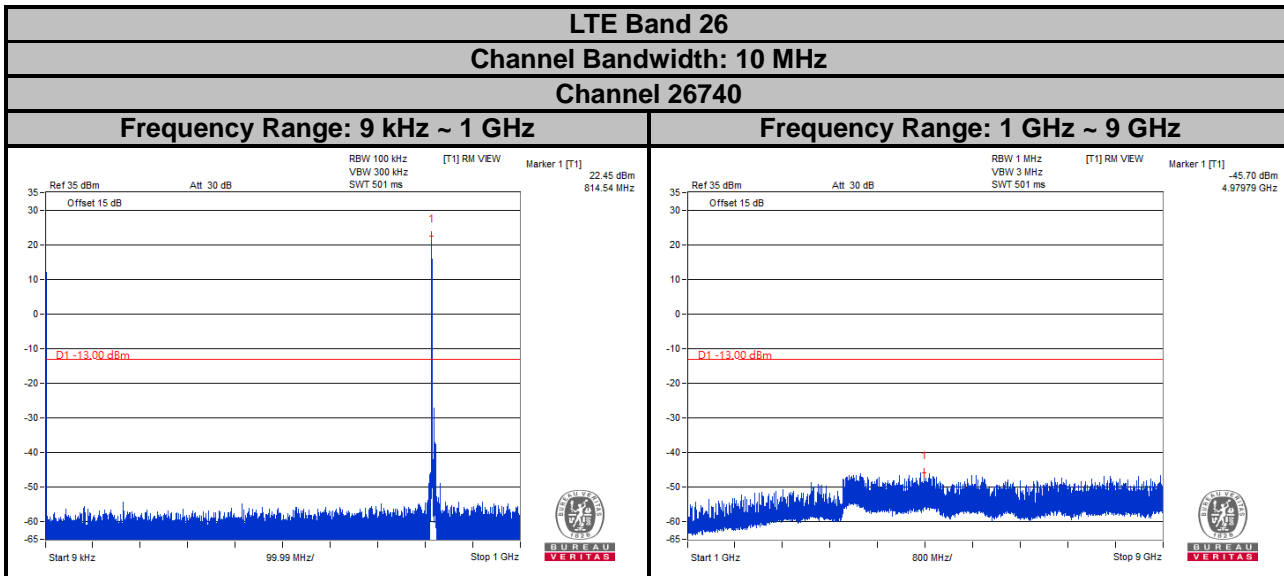

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The limit of emission is equal to -13 dBm.

4.7.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.
2. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.3 Deviation from Test Standard


No deviation.

4.7.4 Test Setup

<Radiated Emission below or equal 1 GHz>

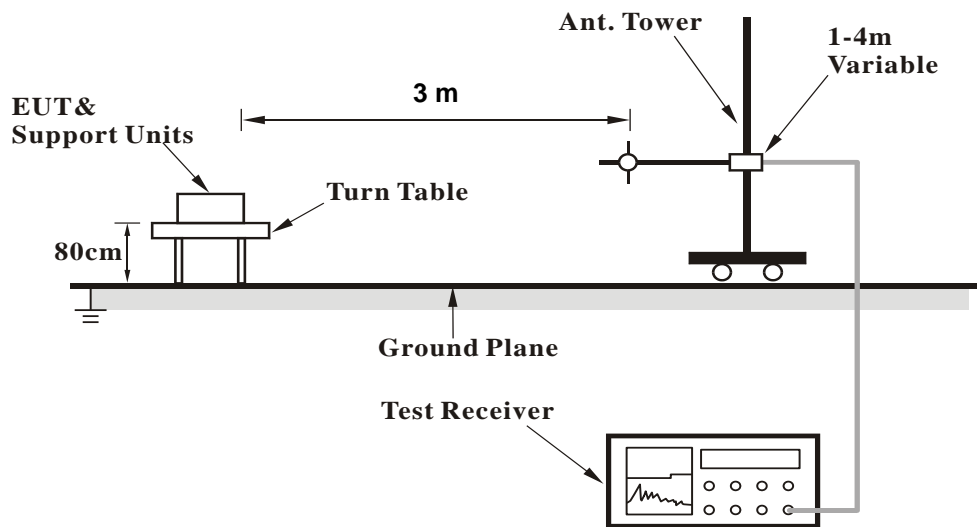

<Radiated Emission above 1 GHz>

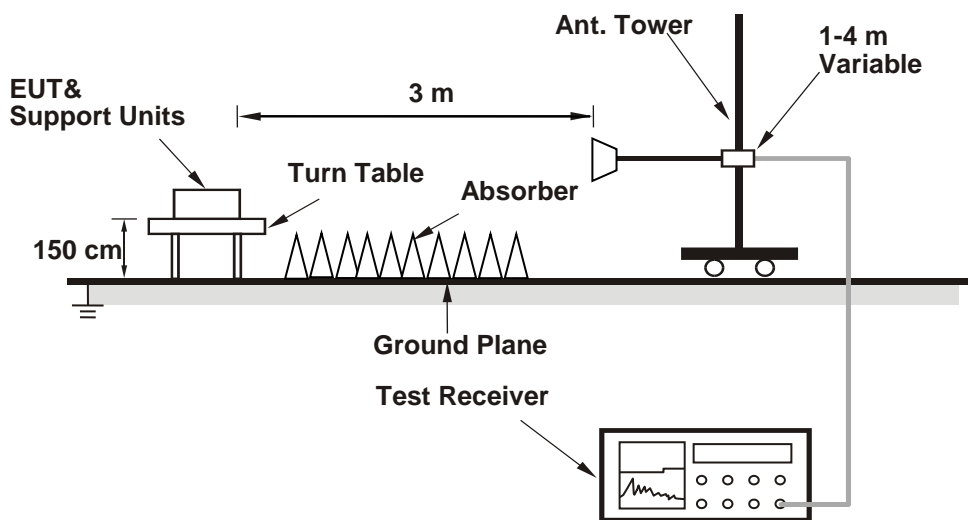

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results


Below 1 GHz

RF Mode	TX LTE Band 26-10MHz	Channel	CH 26740 : 819 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.25	-47.81	-13.00	-34.81	1.01 H	237	62.46	-110.27
2	163.86	-44.01	-13.00	-31.01	2.00 H	8	66.13	-110.14
3	348.16	-53.76	-13.00	-40.76	2.00 H	258	54.06	-107.82
4	523.73	-53.77	-13.00	-40.77	1.01 H	19	49.30	-103.07
5	699.30	-56.71	-13.00	-43.71	2.00 H	2	42.54	-99.25
6	942.77	-52.20	-13.00	-39.20	2.00 H	357	42.58	-94.78

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

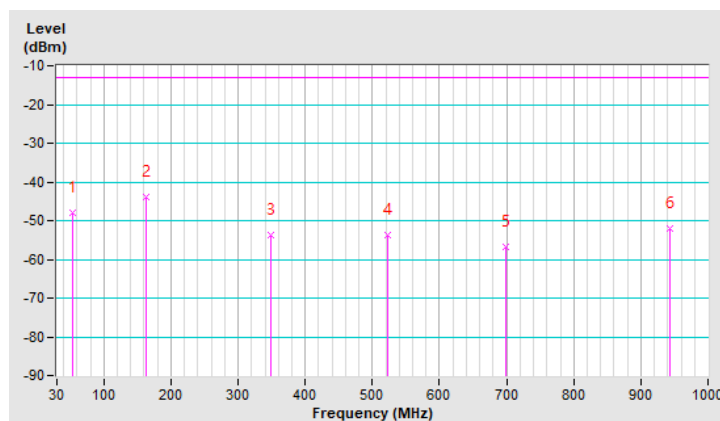


RF Mode	TX LTE Band 26-10MHz	Channel	CH 26740 : 819 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	58.13	-46.69	-13.00	-33.69	1.16 V	31	63.92	-110.61
2	275.41	-52.01	-13.00	-39.01	1.22 V	231	58.66	-110.67
3	505.30	-53.61	-13.00	-40.61	1.19 V	187	49.79	-103.40
4	693.48	-56.00	-13.00	-43.00	1.03 V	263	43.28	-99.28
5	830.25	-54.00	-13.00	-41.00	1.16 V	82	42.49	-96.49
6	973.81	-51.99	-13.00	-38.99	1.15 V	264	42.37	-94.36

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

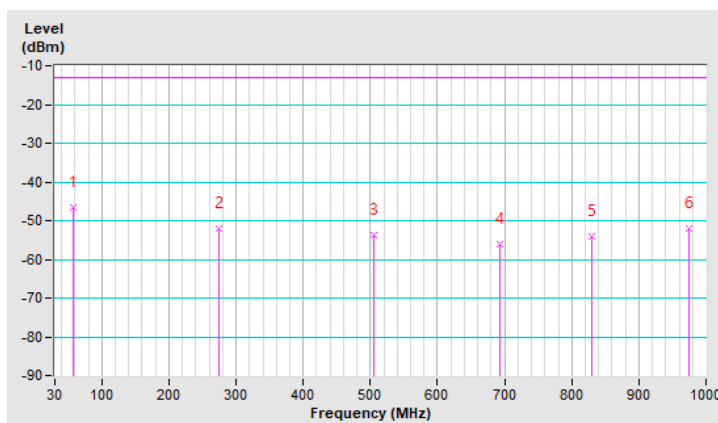

RF Mode	TX LTE Band 26-1.4MHz	Channel	CH 26697 : 814.7 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1629.40	-58.19	-13.00	-45.19	1.44 H	175	64.02	-122.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1629.40	-56.82	-13.00	-43.82	1.44 V	175	65.39	-122.21

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band 26-1.4MHz	Channel	CH 26740 : 819 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-58.06	-13.00	-45.06	3.05 H	110	64.15	-122.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-56.79	-13.00	-43.79	1.92 V	207	65.42	-122.21

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band 26-1.4MHz	Channel	CH 26783 : 823.3 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1646.60	-58.10	-13.00	-45.10	2.83 H	301	64.10	-122.20
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1646.60	-56.76	-13.00	-43.76	2.04 V	305	65.44	-122.20

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band 26-5MHz	Channel	CH 26715 : 816.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1633.00	-58.12	-13.00	-45.12	1.42 H	174	64.09	-122.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1633.00	-56.59	-13.00	-43.59	3.09 V	305	65.62	-122.21

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band 26-5MHz	Channel	CH 26740 : 819 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-58.03	-13.00	-45.03	1.67 H	205	64.18	-122.21

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-56.74	-13.00	-43.74	3.79 V	224	65.47	-122.21

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band 26-5MHz	Channel	CH 26765 : 821.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1643.00	-57.97	-13.00	-44.97	2.81 H	39	64.23	-122.20

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1643.00	-56.92	-13.00	-43.92	2.15 V	220	65.28	-122.20

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band 26-10MHz	Channel	CH 26740 : 819 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1638.00	-57.45	-13.00	-44.45	3.95 H	90	64.76	-122.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1638.00	-56.49	-13.00	-43.49	2.07 V	49	65.72	-122.21

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---