

# FCC Test Report

## (PART 27)

**Report No.:** RFBGSN-WTW-P21120080-7

**FCC ID:** 2AX8C-3545

**Test Model:** FL44TE

**Received Date:** Dec. 09, 2021

**Test Date:** Dec. 29, 2021 ~ Jan. 10, 2022

**Issued Date:** Jan. 24, 2022

**Applicant:** Amazon.com Services LLC

**Address:** 410 Terry Ave N, Seattle, Washington 98109

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	8
2.2 Test Site and Instruments .....	9
<b>3 General Information</b> .....	<b>10</b>
3.1 General Description of EUT .....	10
3.2 Configuration of System under Test .....	13
3.2.1 Description of Support Units .....	13
3.3 Test Mode Applicability and Tested Channel Detail .....	14
3.4 EUT Operating Conditions .....	21
3.5 General Description of Applied Standards and references .....	21
<b>4 Test Types and Results</b> .....	<b>22</b>
4.1 Output Power Measurement .....	22
4.1.1 Limits of Output Power Measurement .....	22
4.1.2 Test Procedures .....	22
4.1.3 Test Setup .....	22
4.1.4 Test Results .....	23
4.2 Modulation Characteristics Measurement .....	29
4.2.1 Limits of Modulation Characteristics .....	29
4.2.2 Test Setup .....	29
4.2.3 Test Procedure .....	29
4.2.4 Test Results .....	30
4.3 Frequency Stability Measurement .....	32
4.3.1 Limits of Frequency Stability Measurement .....	32
4.3.2 Test Procedure .....	32
4.3.3 Test Setup .....	32
4.3.4 Test Results .....	33
4.4 Occupied Bandwidth Measurement .....	52
4.4.1 Limits of Occupied Bandwidth Measurement .....	52
4.4.2 Test Procedure .....	52
4.4.3 Test Setup .....	52
4.4.4 Test Result .....	53
4.5 Band Edge Measurement .....	63
4.5.1 Limits of Band Edge Measurement .....	63
4.5.2 Test Setup .....	63
4.5.3 Test Procedures .....	64
4.5.4 Test Results .....	65
4.6 Peak to Average Ratio .....	85
4.6.1 Limits of Peak to Average Ratio Measurement .....	85
4.6.2 Test Setup .....	85
4.6.3 Test Procedures .....	85
4.6.4 Test Results .....	86
4.7 Conducted Spurious Emissions .....	95
4.7.1 Limits of Conducted Spurious Emissions Measurement .....	95
4.7.2 Test Setup .....	95
4.7.3 Test Procedure .....	95
4.7.4 Test Results .....	96
4.8 Radiated Emission Measurement .....	119
4.8.1 Limits of Radiated Emission Measurement .....	119
4.8.2 Test Procedure .....	119
4.8.3 Deviation from Test Standard .....	119
4.8.4 Test Setup .....	121

4.8.5 Test Results .....	122
<b>5 Pictures of Test Arrangements.....</b>	<b>151</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>152</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBGSN-WTW-P21120080-7	Original Release	Jan. 24, 2022

## 1 Certificate of Conformity

**Product:** Fleet Edge

**Brand:** N/A

**Test Model:** FL44TE

**Sample Status:** Engineering Sample

**Applicant:** Amazon.com Services LLC

**Test Date:** Dec. 29, 2021 ~ Jan. 10, 2022

**Standards:** FCC Part 27, Subpart C, H, F, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**                     Gina Liu                    , **Date:**                     Jan. 24, 2022                      
Gina Liu / Specialist

**Approved by :**                     Jeremy Lin                    , **Date:**                     Jan. 24, 2022                      
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (WCDMA)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)	Equivalent Isotropically radiated power	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Out of Band Emission Measurements	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.57 dB at 87.23 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)	Equivalent Isotropically radiated power	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Out of Band Emission Measurements	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.09 dB at 3465.00 MHz.

<b>Applied Standard: FCC Part 27 &amp; Part 2 (LTE 12)</b>			
<b>FCC Clause</b>	<b>Test Item</b>	<b>Result</b>	<b>Remarks</b>
2.1046 27.50(c)	Equivalent radiated power	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Out of Band Emission Measurements	Pass	Meet the requirement of limit.
--	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -32.40 dB at 237.58 MHz.

<b>Applied Standard: FCC Part 27 &amp; Part 2 (LTE 13)</b>			
<b>FCC Clause</b>	<b>Test Item</b>	<b>Result</b>	<b>Remarks</b>
2.1046 27.50(b)	Equivalent radiated power	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(c)	Out of Band Emission Measurements	Pass	Meet the requirement of limit.
--	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(c)(f)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(c)(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -11.79 dB at 1564.00 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 66)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)	Equivalent Isotropically radiated power	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Out of Band Emission Measurements	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.11 dB at 3540.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB



## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Sep. 22, 2021	Sep. 21, 2022
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 03, 2021	Dec. 02, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 12, 2021	Apr. 11, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 14, 2021	Nov. 13, 2022
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Oct. 28, 2021	Oct. 27, 2022
HORN Antenna SCHWARZBECK	BBHA 9120 D	209	Nov. 14, 2021	Nov. 13, 2022
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 13, 2021	Apr. 12, 2022
Loop Antenna	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC 012645	980115	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 184045	980116	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 330H	980112	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable EMCI	EMC104-SM-SM-8000	171005	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-100 0(140807)	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 05, 2021	Oct. 04, 2022
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 26, 2021	Aug. 25, 2022
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Feb. 07, 2021	Feb. 06, 2022
Temperature & Humidity Chamber GIANT FORCE	GTH-120-40-CP-AR	MAA1306-019	Sep. 10, 2021	Sep. 09, 2022
DC power supply Keysight	U8002A	MY56330015	NA	NA
Digital Multimeter Fluke	87-III	70360742	Jun. 24, 2021	Jun. 23, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Fleet Edge	
<b>Brand</b>	N/A	
<b>Test Model</b>	FL44TE	
<b>Status of EUT</b>	Engineering Sample	
<b>Power Supply Rating</b>	12 Vdc (Power Supply)	
<b>Modulation Type</b>	WCDMA	QPSK
	LTE	QPSK, 16QAM
<b>Frequency Range</b>	WCDMA	1712.4 ~ 1752.6 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
	LTE Band 13 (Channel Bandwidth: 5 MHz)	779.5 ~ 784.5 MHz
	LTE Band 13 (Channel Bandwidth: 10 MHz)	782.0 MHz
	LTE Band 66 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1779.3 MHz
	LTE Band 66 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1778.5 MHz
	LTE Band 66 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1777.5 MHz
	LTE Band 66 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1775.0 MHz
	LTE Band 66 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1772.5 MHz
LTE Band 66 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1770.0 MHz	
<b>Emission Designator</b>	WCDMA	4M15F9W
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 4 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 4 (Channel Bandwidth: 5 MHz)	4M50G7D
	LTE Band 4 (Channel Bandwidth: 10 MHz)	8M98G7D
	LTE Band 4 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 4 (Channel Bandwidth: 20 MHz)	18M0D7W
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 12 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 12 (Channel Bandwidth: 5 MHz)	4M50G7D
	LTE Band 12 (Channel Bandwidth: 10 MHz)	9M01D7W
	LTE Band 13 (Channel Bandwidth: 5 MHz)	4M50G7D
	LTE Band 13 (Channel Bandwidth: 10 MHz)	8M96D7W
	LTE Band 66 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 66 (Channel Bandwidth: 3 MHz)	2M70G7D
LTE Band 66 (Channel Bandwidth: 5 MHz)	4M49G7D	

	LTE Band 66 (Channel Bandwidth: 10 MHz)	8M98G7D
	LTE Band 66 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 66 (Channel Bandwidth: 20 MHz)	18M0D7W
<b>Max. ERP Power</b>	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	153.815 mW (21.87dBm)
	LTE Band 12 (Channel Bandwidth: 3 MHz)	154.882 mW (21.90dBm)
	LTE Band 12 (Channel Bandwidth: 5 MHz)	157.761 mW (21.98dBm)
	LTE Band 12 (Channel Bandwidth: 10 MHz)	158.125 mW (21.99dBm)
	LTE Band 13 (Channel Bandwidth: 5 MHz)	236.048 mW (23.73dBm)
	LTE Band 13 (Channel Bandwidth: 10 MHz)	236.592 mW (23.74dBm)
<b>Max. EIRP Power</b>	WCDMA	820.352 mW (29.14dBm)
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	769.130 mW (28.86dBm)
	LTE Band 4 (Channel Bandwidth: 3 MHz)	809.096 mW (29.08dBm)
	LTE Band 4 (Channel Bandwidth: 5 MHz)	810.961 mW (29.09dBm)
	LTE Band 4 (Channel Bandwidth: 10 MHz)	818.465 mW (29.13dBm)
	LTE Band 4 (Channel Bandwidth: 15 MHz)	810.961 mW (29.09dBm)
	LTE Band 4 (Channel Bandwidth: 20 MHz)	753.356 mW (28.77dBm)
	LTE Band 66 (Channel Bandwidth: 1.4 MHz)	727.780 mW (28.62dBm)
	LTE Band 66 (Channel Bandwidth: 3 MHz)	749.894 mW (28.75dBm)
	LTE Band 66 (Channel Bandwidth: 5 MHz)	765.597 mW (28.84dBm)
	LTE Band 66 (Channel Bandwidth: 10 MHz)	779.830 mW (28.92dBm)
	LTE Band 66 (Channel Bandwidth: 15 MHz)	799.834 mW (29.03dBm)
	LTE Band 66 (Channel Bandwidth: 20 MHz)	737.904 mW (28.68dBm)
<b>Antenna Type</b>	Refer to Note as below	
<b>Accessory Device</b>	N/A	
<b>Data Cable Supplied</b>	N/A	

Note:

1. The EUT contains following accessory devices.

Product	Brand	Model	Description
BT/WLAN Module	Intel	9560NGW	802.11 a/b/g/n/ac Wireless LAN + Bluetooth 5
WWAN Module	Quectel	EM06-A	WCDMA, LTE
CPU	Intel	i5-9500TE	CFL-S, 6C 35W
SO-DIMM	Innodisk	--	2667MHz, 8G&16G
LTE Main Antenna	Rivian	N/A	Cable length: 2445mm P/N: J7-1
LTE Aux Antenna	Rivian	N/A	Cable length: 3520mm P/N: J6-1
WiFi Main Antenna	Rivian	PT00206181-A	Cable length: 3550mm P/N: J5-1
WiFi Aux Antenna	Rivian	PT00207642-A	Cable length: 2475mm P/N: J4-1


2. The antenna information is listed as below.

Antenna information		Antenna gain (dBi)			
Type	Ant.	WCDMA 4 / LTE 4	LTE 12	LTE 13	LTE 66
Multiband Antennas	Main	5.21	-1.4	0.05	5.21
	Aux	4.63	0.05	1.91	4.63

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

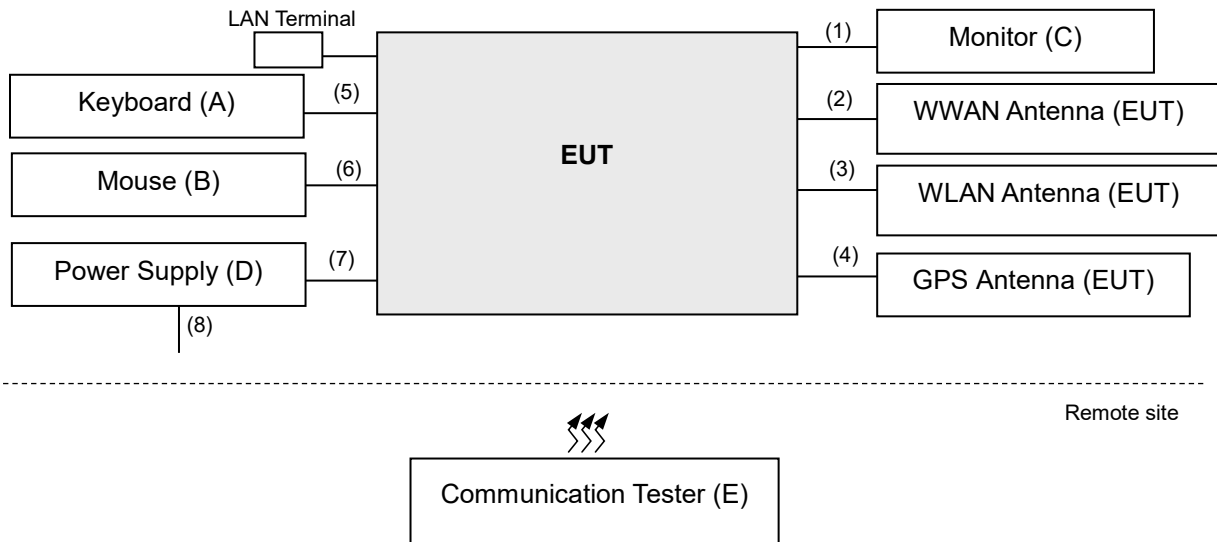

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Keyboard	Lenovo	KB1021	N/A	N/A	--
B	Mouse	DELL	MS111-P	CN-011D3V-71581-1CJ-092E	N/A	--
C	Monitor	HP	HP Z24s	6CM5172L56	N/A	--
D	Power Supply	NA	NA	NA	N/A	--
E	Communication Tester	R&S	CMU200	123295	N/A	For WCDMA
		ANRITSU	MT8821C	6201462755	N/A	For LTE

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	HDMI Cable	1	2 m	N	0	-
2.	RF Cable	1	2445 mm	N	0	Accessory of the EUT
		1	3520 mm	N	0	Accessory of the EUT
3.	RF Cable	1	3550 mm	N	0	Accessory of the EUT
		1	2475 mm	N	0	Accessory of the EUT
4.	RF Cable	1	0.5 m	N	0	Accessory of the EUT
5.	USB Cable	1	2.4 m	N	0	-
6.	USB Cable	1	2.2 m	N	0	-
7.	DC power Cable	1	1.2 m	N	0	-
8.	AC power Cable	1	1.8 m	N	0	-

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP / EIRP	Radiated Emission
WCDMA	X-plane	X-axis
LTE Band 4	X-plane	X-axis
LTE Band 12	X-plane	X-axis
LTE Band 13	X-plane	X-axis
LTE Band 66	X-plane	X-axis

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	1312 to 1513	1312, 1413, 1513	WCDMA
-	Modulation Characteristics	1312 to 1513	1413	WCDMA
-	Frequency Stability	1312 to 1513	1312, 1513	WCDMA
-	Occupied Bandwidth	1312 to 1513	1312, 1413, 1513	WCDMA
-	Band Edge	1312 to 1513	1312, 1513	WCDMA
-	Peak to Average Ratio	1312 to 1513	1312, 1413, 1513	WCDMA
-	Conducted Emission	1312 to 1513	1312, 1413, 1513	WCDMA
-	Radiated Emission	1312 to 1513	1312, 1413, 1513	WCDMA

Note: For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing

### LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	20050 to 20300	20175	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Frequency Stability	19957 to 20393	19957, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	19965, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20000, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
-	Band Edge	19957 to 20393	19957	1.4 MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			20393	1.4 MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		19965 to 20385	19965	3 MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			20385	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		19975 to 20375	19975	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			20375	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		20000 to 20350	20000	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			20350	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		20025 to 20325	20025	15 MHz	QPSK	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			20325	15 MHz	QPSK	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		20050 to 20300	20050	20 MHz	QPSK	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
			20300	20 MHz	QPSK	1 RB / 99 RB Offset 100 RB / 0 RB Offset		
		-	Conducted Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
				19965 to 20385	19965, 20175, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
				19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
				20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
				20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
				20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset		
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset		
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset		

**Note:**

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.



## LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23060 to 23130	23095	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Frequency Stability	23017 to 23173	23017, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	23017 to 23173	23017	1.4 MHz	QPSK	1 RB / 0 RB Offset
			23173	1.4 MHz	QPSK	6 RB / 0 RB Offset
			23025	3 MHz	QPSK	1 RB / 5 RB Offset
			23165	3 MHz	QPSK	6 RB / 0 RB Offset
		23025 to 23165	23025	3 MHz	QPSK	1 RB / 0 RB Offset
			23165	3 MHz	QPSK	15 RB / 0 RB Offset
			23035	5 MHz	QPSK	1 RB / 14 RB Offset
			23155	5 MHz	QPSK	15 RB / 0 RB Offset
		23035 to 23155	23035	5 MHz	QPSK	1 RB / 0 RB Offset
			23155	5 MHz	QPSK	25 RB / 0 RB Offset
			23060	10 MHz	QPSK	1 RB / 24 RB Offset
			23130	10 MHz	QPSK	25 RB / 0 RB Offset
23060 to 23130	23060	10 MHz	QPSK	1 RB / 0 RB Offset		
	23130	10 MHz	QPSK	50 RB / 0 RB Offset		
	23060	10 MHz	QPSK	1 RB / 49 RB Offset		
	23130	10 MHz	QPSK	50 RB / 0 RB Offset		
-	Conducted Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset

### Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

### LTE Band 13

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23230	23230	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Frequency Stability	23205 to 23255	23205, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	23205 to 23255	23205	5 MHz	QPSK	1 RB / 0 RB Offset
			23255	5 MHz	QPSK	25 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 24 RB Offset
			23230	10 MHz	QPSK	25 RB / 0 RB Offset
			23230	10 MHz	QPSK	1 RB / 0 RB Offset
			23230	10 MHz	QPSK	50 RB / 0 RB Offset
-	Conducted Emission	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset

**Note:**

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

**LTE Band 66**

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	132072 to 132572	132322	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Frequency Stability	131979 to 132665	131979, 132665	1.4 MHz	QPSK	1 RB / 0 RB Offset
		131987 to 132657	131987, 132657	3 MHz	QPSK	1 RB / 0 RB Offset
		131997 to 132647	131997, 132647	5 MHz	QPSK	1 RB / 0 RB Offset
		132022 to 132622	132022, 132622	10 MHz	QPSK	1 RB / 0 RB Offset
		132047 to 132597	132047, 132597	15 MHz	QPSK	1 RB / 0 RB Offset
		132072 to 132572	132072, 132572	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	131979 to 132665	131979	1.4 MHz	QPSK	1 RB / 0 RB Offset
			132665	1.4 MHz	QPSK	6 RB / 0 RB Offset
		131987 to 132657	131987	3 MHz	QPSK	1 RB / 5 RB Offset
			132657	3 MHz	QPSK	6 RB / 0 RB Offset
		131997 to 132647	131997	5 MHz	QPSK	1 RB / 0 RB Offset
			132647	5 MHz	QPSK	25 RB / 0 RB Offset
		132022 to 132622	132022	10 MHz	QPSK	1 RB / 24 RB Offset
			132622	10 MHz	QPSK	25 RB / 0 RB Offset
		132047 to 132597	132047	15 MHz	QPSK	1 RB / 0 RB Offset
			132597	15 MHz	QPSK	50 RB / 0 RB Offset
		132072 to 132572	132072	20 MHz	QPSK	1 RB / 49 RB Offset
			132572	20 MHz	QPSK	50 RB / 0 RB Offset
		132047 to 132597	132047	15 MHz	QPSK	1 RB / 0 RB Offset
			132597	15 MHz	QPSK	75 RB / 0 RB Offset
		132072 to 132572	132072	20 MHz	QPSK	1 RB / 74 RB Offset
			132572	20 MHz	QPSK	75 RB / 0 RB Offset
		132047 to 132597	132047	15 MHz	QPSK	1 RB / 0 RB Offset
			132597	15 MHz	QPSK	100 RB / 0 RB Offset
		132072 to 132572	132072	20 MHz	QPSK	1 RB / 99 RB Offset
			132572	20 MHz	QPSK	100 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Conducted Emission	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK	1 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3 MHz	QPSK	1 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK	1 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10 MHz	QPSK	1 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15 MHz	QPSK	1 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK	1 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK	1 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK	1 RB / 0 RB Offset

**Note:**

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

**Test Condition:**

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Modulation Characteristics	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Frequency Stability	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Occupied Bandwidth	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Band Edge	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Peak to Average Ratio	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Conducted Emission	25 deg. C, 65 % RH	12 Vdc	Rui Chan
Radiated Emission	21 deg. C, 63 % RH	120 Vac, 60 Hz	Tim Chen, Vincent Chen, Thomas Cheng

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards and references**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**ANSI 63.26-2015**

**Note:** All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-E 2016**

**Note:** All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

For LTE Band 13:

Control stations and mobile stations in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands and fixed stations transmitting in the 787-788 MHz and 805-806 MHz bands are limited to 30 watts ERP.

Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

For LTE Band 12:

Control and mobile stations in the 698-746 MHz band are limited to 30 watts ERP.

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

For WCDMA Band 4, LTE Band 4, 66:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

#### 4.1.2 Test Procedures

##### Conducted Power Measurement:

- a. The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

##### Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

$$\text{ERP} = P_{\text{Meas}} + G_{\text{T}} - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively  
(expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_{\text{T}}$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

#### 4.1.3 Test Setup

##### EIRP / ERP Measurement:

##### Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	23.74	23.56	23.93

LTE Band 4																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	20050	20175						20300	Channel	20025		20175	20325
				Frequency (MHz)	1720.0	1732.5						1745.0	Frequency (MHz)	1717.5		1732.5	1747.5
20M	QPSK	1	0	23.56	23.36	23.32	0	15M	QPSK	1	0	23.75	23.88	23.83	0		
		1	50	23.43	23.32	23.30	0			1	37	22.96	23.02	22.88	0		
		1	99	23.35	23.29	23.28	0			1	74	23.74	23.74	23.52	0		
		50	0	22.55	22.54	22.62	1			36	0	22.80	22.85	22.70	1		
		50	25	22.51	22.55	22.56	1			36	19	22.49	22.60	22.40	1		
		50	50	22.59	22.61	22.68	1			36	39	22.73	22.81	22.68	1		
	100	0	22.46	22.53	22.69	1	75		0	22.66	22.67	22.53	1				
	16QAM	1	0	22.67	22.84	22.74	1		16QAM	1	0	23.26	23.31	23.36	1		
		1	50	22.20	22.34	22.31	1			1	37	22.52	22.58	22.69	1		
		1	99	22.48	22.69	22.62	1			1	74	22.39	22.49	22.54	1		
		50	0	21.57	21.82	21.68	2			36	0	21.66	21.81	21.87	2		
		50	25	21.29	21.62	21.38	2			36	19	21.40	21.65	21.67	2		
		50	50	21.42	21.74	21.49	2			36	39	21.43	21.72	21.73	2		
		100	0	21.27	21.54	21.39	2			75	0	21.27	21.55	21.65	2		

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	20000	20175						20350	Channel	19975		20175	20375
				Frequency (MHz)	1715.0	1732.5						1750.0	Frequency (MHz)	1712.5		1732.5	1752.5
10M	QPSK	1	0	23.92	23.82	23.70	0	5M	QPSK	1	0	23.88	23.56	23.67	0		
		1	24	23.68	23.51	23.38	0			1	12	23.78	23.48	23.50	0		
		1	49	23.71	23.63	23.48	0			1	24	23.74	23.41	23.38	0		
		25	0	22.84	22.69	22.58	1			12	0	22.86	22.54	22.41	1		
		25	12	22.68	22.55	22.41	1			12	6	22.74	22.51	22.38	1		
		25	25	22.79	22.67	22.58	1			12	13	22.75	22.58	22.46	1		
	50	0	22.75	22.65	22.63	1	25		0	22.68	22.52	22.47	1				
	16QAM	1	0	23.24	23.21	23.12	1		16QAM	1	0	23.16	22.86	22.98	1		
		1	24	22.69	22.75	22.69	1			1	12	22.96	22.67	22.89	1		
		1	49	22.64	22.70	22.62	1			1	24	22.86	22.61	22.81	1		
		25	0	21.56	21.65	21.60	2			12	0	21.66	21.42	21.63	2		
		25	12	21.53	21.65	21.58	2			12	6	21.53	21.38	21.57	2		
		25	25	21.41	21.63	21.60	2			12	13	21.72	21.55	21.64	2		
		50	0	21.47	21.63	21.58	2			25	0	21.57	21.45	21.44	2		

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	19965	20175						20385	Channel	19957		20175	20393
				Frequency (MHz)	1711.5	1732.5						1753.5	Frequency (MHz)	1710.7		1732.5	1754.3
3M	QPSK	1	0	23.51	23.58	23.87	0	1.4M	QPSK	1	0	23.54	23.47	23.65	0		
		1	7	23.40	23.57	23.82	0			1	2	23.27	23.27	23.52	0		
		1	14	23.24	23.36	23.51	0			1	5	23.38	23.34	23.49	0		
		8	0	22.37	22.53	22.69	1			3	0	23.47	23.36	23.58	0		
		8	3	22.32	22.51	22.71	1			3	1	23.41	23.40	23.56	0		
		8	7	22.25	22.50	22.62	1			3	3	23.35	23.29	23.45	0		
	15	0	22.17	22.47	22.67	1	6		0	22.48	22.46	22.60	1				
	16QAM	1	0	22.94	23.14	22.85	1		16QAM	1	0	22.64	22.54	22.64	1		
		1	7	22.90	23.07	22.81	1			1	2	22.54	22.49	22.63	1		
		1	14	22.68	22.88	22.55	1			1	5	22.35	22.27	22.39	1		
		8	0	21.39	21.63	21.25	2			3	0	22.22	22.15	22.35	1		
		8	3	21.32	21.61	21.33	2			3	1	22.39	22.28	22.49	1		
		8	7	21.27	21.63	21.27	2			3	3	22.56	22.38	22.63	1		
		15	0	21.33	21.62	21.25	2			6	0	21.71	21.52	21.73	2		

LTE Band 12															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
				Channel	23060	23095						23130	Channel	23035	
		Frequency (MHz)	704.0	707.5	711.0	Frequency (MHz)	701.5			707.5	713.5				
10M	QPSK	1	0	24.06	24.09	23.97	0	5M	QPSK	1	0	24.01	24.07	24.02	0
		1	24	23.83	23.82	23.61	0			1	12	23.76	23.85	23.84	0
		1	49	23.72	23.68	23.42	0			1	24	23.73	23.89	23.89	0
		25	0	24.08	24.02	23.70	1			12	0	23.79	23.93	23.96	1
		25	12	23.97	23.96	23.63	1			12	6	23.80	23.98	24.02	1
		25	25	23.92	23.93	23.69	1			12	13	23.83	23.95	24.08	1
	50	0	24.00	23.97	23.74	1	25		0	23.71	23.91	23.97	1		
	16QAM	1	0	23.85	23.98	23.92	1		16QAM	1	0	23.92	24.05	23.88	1
		1	24	23.77	23.85	23.89	1			1	12	23.62	23.74	23.66	1
		1	49	23.95	23.96	24.09	1			1	24	23.85	23.95	23.84	1
		25	0	23.72	23.81	23.88	2			12	0	23.83	24.01	23.87	2
		25	12	23.95	23.96	24.03	2			12	6	23.74	24.00	23.79	2
		25	25	23.93	23.94	23.96	2			12	13	23.64	23.98	23.84	2
	50	0	23.92	23.88	23.98	2	25		0	23.70	23.96	23.73	2		

LTE Band 13															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
				Channel	23230								Channel	23205	
		Frequency (MHz)	782.0			Frequency (MHz)	779.5			782.0	784.5				
10M	QPSK	1	0		23.98		0	5M	QPSK	1	0	23.84	23.97	23.83	0
		1	24		23.75		0			1	12	23.62	23.81	23.71	0
		1	49		23.78		0			1	24	23.61	23.79	23.72	0
		25	0		22.95		1			12	0	22.70	22.98	22.89	1
		25	12		23.05		1			12	6	22.56	22.88	22.82	1
		25	25		22.95		1			12	13	22.55	22.95	22.90	1
	50	0		23.02		1	25		0	22.43	22.91	22.96	1		
	16QAM	1	0		23.26		1		16QAM	1	0	23.05	23.28	23.13	1
		1	24		23.18		1			1	12	22.90	23.05	22.87	1
		1	49		23.07		1			1	24	23.01	23.19	23.02	1
		25	0		21.91		2			12	0	21.60	21.88	21.70	2
		25	12		22.04		2			12	6	21.64	21.92	21.73	2
		25	25		22.06		2			12	13	21.65	21.97	21.84	2
	50	0		22.16		2	25		0	21.65	21.93	21.87	2		



LTE Band 66																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	132072	132322						132572	Channel	132047		132322	132597
				Frequency (MHz)	1720.0	1745.0						1770.0	Frequency (MHz)	1717.5		1745.0	1772.5
20M	QPSK	1	0	23.31	23.41	23.47	0	15M	QPSK	1	0	23.67	23.76	23.82	0		
		1	50	23.35	23.39	23.42	0			1	37	23.08	23.23	23.26	0		
		1	99	23.25	23.36	23.33	0			1	74	23.34	23.52	23.56	0		
		50	0	22.32	22.44	22.35	1			36	0	22.37	22.63	22.63	1		
		50	25	22.36	22.41	22.39	1			36	19	22.17	22.40	22.30	1		
		50	50	22.37	22.39	22.31	1			36	39	23.11	23.37	23.17	1		
	16QAM	100	0	22.47	22.46	22.31	1		75	0	22.13	22.49	22.36	1			
		1	0	22.52	22.69	22.76	1		16QAM	1	0	22.92	23.14	23.12	1		
		1	50	22.55	22.66	22.82	1			1	37	22.30	22.54	22.44	1		
		1	99	22.52	22.58	22.69	1			1	74	22.57	22.78	22.70	1		
		50	0	21.46	21.51	21.61	2			36	0	21.30	21.61	21.63	2		
		50	25	21.48	21.47	21.48	2			36	19	21.00	21.41	21.42	2		
		50	50	21.38	21.39	21.44	2			36	39	21.00	21.39	21.48	2		
		100	0	21.42	21.45	21.50	2			75	0	21.16	21.51	21.51	2		

**ERP / EIRP Power (dBm)**

Band	WCDMA IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	28.95	28.77	29.14

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
				20050	20175	20300						20025	20175	20325	
				Channel Frequency (MHz)	1720.0	1732.5						1745.0	Channel Frequency (MHz)	1717.5	
20M	QPSK	1	0	28.77	28.57	28.53	0	15M	QPSK	1	0	28.96	29.09	29.04	0
		1	50	28.64	28.53	28.51	0			1	37	28.17	28.23	28.09	0
		1	99	28.56	28.50	28.49	0			1	74	28.95	28.95	28.73	0
		50	0	27.76	27.75	27.83	1			36	0	28.01	28.06	27.91	1
		50	25	27.72	27.76	27.77	1			36	19	27.70	27.81	27.61	1
		50	50	27.80	27.82	27.89	1			36	39	27.94	28.02	27.89	1
		100	0	27.67	27.74	27.90	1			75	0	27.87	27.88	27.74	1
	16QAM	1	0	27.88	28.05	27.95	1		16QAM	1	0	28.47	28.52	28.57	1
		1	50	27.41	27.55	27.52	1			1	37	27.73	27.79	27.90	1
		1	99	27.69	27.90	27.83	1			1	74	27.60	27.70	27.75	1
		50	0	26.78	27.03	26.89	2			36	0	26.87	27.02	27.08	2
		50	25	26.50	26.83	26.59	2			36	19	26.61	26.86	26.88	2
		50	50	26.63	26.95	26.70	2			36	39	26.64	26.93	26.94	2
		100	0	26.48	26.75	26.60	2			75	0	26.48	26.76	26.86	2
10M	QPSK	1	0	29.13	29.03	28.91	0	5M	QPSK	1	0	29.09	28.77	28.88	0
		1	24	28.89	28.72	28.59	0			1	12	28.99	28.69	28.71	0
		1	49	28.92	28.84	28.69	0			1	24	28.95	28.62	28.59	0
		25	0	28.05	27.90	27.79	1			12	0	28.07	27.75	27.62	1
		25	12	27.89	27.76	27.62	1			12	6	27.95	27.72	27.59	1
		25	25	28.00	27.88	27.79	1			12	13	27.96	27.79	27.67	1
		50	0	27.96	27.86	27.84	1			25	0	27.89	27.73	27.68	1
	16QAM	1	0	28.45	28.42	28.33	1		16QAM	1	0	28.37	28.07	28.19	1
		1	24	27.90	27.96	27.90	1			1	12	28.17	27.88	28.10	1
		1	49	27.85	27.91	27.83	1			1	24	28.07	27.82	28.02	1
		25	0	26.77	26.86	26.81	2			12	0	26.87	26.63	26.84	2
		25	12	26.74	26.86	26.79	2			12	6	26.74	26.59	26.78	2
		25	25	26.62	26.84	26.81	2			12	13	26.93	26.76	26.85	2
		50	0	26.68	26.84	26.79	2			25	0	26.78	26.66	26.65	2
3M	QPSK	1	0	28.72	28.79	29.08	0	1.4M	QPSK	1	0	28.75	28.68	28.86	0
		1	7	28.61	28.78	29.03	0			1	2	28.48	28.48	28.73	0
		1	14	28.45	28.57	28.72	0			1	5	28.59	28.55	28.70	0
		8	0	27.58	27.74	27.90	1			3	0	28.68	28.57	28.79	0
		8	3	27.53	27.72	27.92	1			3	1	28.62	28.61	28.77	0
		8	7	27.46	27.71	27.83	1			3	3	28.56	28.50	28.66	0
		15	0	27.38	27.68	27.88	1			6	0	27.69	27.67	27.81	1
	16QAM	1	0	28.15	28.35	28.06	1		16QAM	1	0	27.85	27.75	27.85	1
		1	7	28.11	28.28	28.02	1			1	2	27.75	27.70	27.84	1
		1	14	27.89	28.09	27.76	1			1	5	27.56	27.48	27.60	1
		8	0	26.60	26.84	26.46	2			3	0	27.43	27.36	27.56	1
		8	3	26.53	26.82	26.54	2			3	1	27.60	27.49	27.70	1
		8	7	26.48	26.84	26.48	2			3	3	27.77	27.59	27.84	1
		15	0	26.54	26.83	26.46	2			6	0	26.92	26.73	26.94	2

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 12																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	23060	23095						23130	Channel	23035		23095	23155
				Frequency (MHz)	704.0	707.5						711.0	Frequency (MHz)	701.5		707.5	713.5
10M	QPSK	1	0	21.96	21.99	21.87	0	5M	QPSK	1	0	21.91	21.97	21.92	0		
		1	24	21.73	21.72	21.51	0			1	12	21.66	21.75	21.74	0		
		1	49	21.62	21.58	21.32	0			1	24	21.63	21.79	21.79	0		
		25	0	21.98	21.92	21.60	1			12	0	21.69	21.83	21.86	1		
		25	12	21.87	21.86	21.53	1			12	6	21.70	21.88	21.92	1		
		25	25	21.82	21.83	21.59	1			12	13	21.73	21.85	21.98	1		
	16QAM	50	0	21.90	21.87	21.64	1		25	0	21.73	21.85	21.98	1			
		1	0	21.75	21.88	21.82	1		16QAM	1	0	21.82	21.95	21.78	1		
		1	24	21.67	21.75	21.79	1			1	12	21.52	21.64	21.56	1		
		1	49	21.85	21.86	21.99	1			1	24	21.75	21.85	21.74	1		
		25	0	21.62	21.71	21.78	2			12	0	21.73	21.91	21.77	2		
		25	12	21.85	21.86	21.93	2			12	6	21.64	21.90	21.69	2		
		25	25	21.83	21.84	21.86	2			12	13	21.54	21.88	21.74	2		
		50	0	21.82	21.78	21.88	2			25	0	21.60	21.86	21.63	2		

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 13															
BW	MCS Index	RB Size	RB Offset	Mid	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel						23230	Channel	23205		23230	23225
				Frequency (MHz)						782.0	Frequency (MHz)	779.5		782.0	784.5
10M	QPSK	1	0	23.74	0	5M	QPSK	1	0	23.60	23.73	23.59	0		
		1	24	23.51	0			1	12	23.38	23.57	23.47	0		
		1	49	23.54	0			1	24	23.37	23.55	23.48	0		
		25	0	22.71	1			12	0	22.46	22.74	22.65	1		
		25	12	22.81	1			12	6	22.32	22.64	22.58	1		
		25	25	22.71	1			12	13	22.31	22.71	22.66	1		
	16QAM	50	0	22.78	1		25	0	22.19	22.67	22.72	1			
		1	0	23.02	1		16QAM	1	0	22.81	23.04	22.89	1		
		1	24	22.94	1			1	12	22.66	22.81	22.63	1		
		1	49	22.83	1			1	24	22.77	22.95	22.78	1		
		25	0	21.67	2			12	0	21.36	21.64	21.46	2		
		25	12	21.80	2			12	6	21.40	21.68	21.49	2		
		25	25	21.82	2			12	13	21.41	21.73	21.60	2		
		50	0	21.92	2			25	0	21.41	21.69	21.63	2		

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 66																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	132072	132322						132572	Channel	132047		132322	132597
				Frequency (MHz)	1720.0	1745.0						1770.0	Frequency (MHz)	1717.5		1745.0	1772.5
20M	QPSK	1	0	28.52	28.62	28.68	0	15M	QPSK	1	0	28.88	28.97	29.03	0		
		1	50	28.56	28.60	28.63	0			1	37	28.29	28.44	28.47	0		
		1	99	28.46	28.57	28.54	0			1	74	28.55	28.73	28.77	0		
		50	0	27.53	27.65	27.56	1			36	0	27.58	27.84	27.84	1		
		50	25	27.57	27.62	27.60	1			36	19	27.38	27.61	27.51	1		
		50	50	27.58	27.60	27.52	1			36	39	28.32	28.58	28.38	1		
	100	0	27.68	27.67	27.52	1	75		0	27.34	27.70	27.57	1				
	16QAM	1	0	27.73	27.90	27.97	1		16QAM	1	0	28.13	28.35	28.33	1		
		1	50	27.76	27.87	28.03	1			1	37	27.51	27.75	27.65	1		
		1	99	27.73	27.79	27.90	1			1	74	27.78	27.99	27.91	1		
		50	0	26.67	26.72	26.82	2			36	0	26.51	26.82	26.84	2		
		50	25	26.69	26.68	26.69	2			36	19	26.21	26.62	26.63	2		
		50	50	26.59	26.60	26.65	2			36	39	26.21	26.60	26.69	2		
	100	0	26.63	26.66	26.71	2	75		0	26.37	26.72	26.72	2				
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	132022	132322						132622	Channel	131997		132322	132647
				Frequency (MHz)	1715.0	1745.0						1775.0	Frequency (MHz)	1712.5		1745.0	1777.5
10M	QPSK	1	0	28.88	28.92	28.89	0	5M	QPSK	1	0	28.75	28.84	28.63	0		
		1	24	28.61	28.66	28.57	0			1	12	28.53	28.66	28.49	0		
		1	49	28.60	28.74	28.63	0			1	24	28.49	28.59	28.33	0		
		25	0	27.60	27.71	27.60	1			12	0	28.47	28.58	28.27	1		
		25	12	27.41	27.57	27.56	1			12	6	28.40	28.58	28.18	1		
		25	25	27.27	27.53	27.55	1			12	13	28.36	28.52	28.07	1		
	50	0	27.31	27.60	27.54	1	25		0	28.28	28.53	28.08	1				
	16QAM	1	0	27.93	27.97	27.86	1		16QAM	1	0	27.69	27.86	27.66	1		
		1	24	27.78	27.88	27.80	1			1	12	27.55	27.74	27.62	1		
		1	49	27.86	27.88	27.77	1			1	24	27.53	27.72	27.67	1		
		25	0	26.68	26.72	26.70	2			12	0	26.39	26.66	26.53	2		
		25	12	26.59	26.64	26.57	2			12	6	26.27	26.62	26.56	2		
		25	25	26.55	26.60	26.51	2			12	13	26.22	26.57	26.54	2		
	50	0	26.62	26.65	26.54	2	25		0	26.29	26.60	26.47	2				
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	131987	132322						132657	Channel	131979		132322	132665
				Frequency (MHz)	1711.5	1745.5						1778.5	Frequency (MHz)	1710.7		1745.0	1779.3
3M	QPSK	1	0	28.58	28.75	28.46	0	1.4M	QPSK	1	0	28.35	28.62	28.17	0		
		1	7	28.53	28.68	28.30	0			1	2	28.26	28.53	28.13	0		
		1	14	28.44	28.58	28.11	0			1	5	28.24	28.49	28.17	0		
		8	0	27.38	27.62	27.25	1			3	0	28.34	28.52	28.23	0		
		8	3	27.25	27.53	27.20	1			3	1	28.40	28.57	28.18	0		
		8	7	27.23	27.56	27.18	1			3	3	28.39	28.54	28.21	0		
	15	0	27.24	27.57	27.15	1	6		0	27.39	27.55	27.14	1				
	16QAM	1	0	27.63	27.89	27.52	1		16QAM	1	0	27.79	27.75	27.44	1		
		1	7	27.56	27.74	27.40	1			1	2	27.73	27.72	27.40	1		
		1	14	27.41	27.66	27.36	1			1	5	27.55	27.58	27.31	1		
		8	0	26.45	26.67	26.46	2			3	0	27.50	27.57	27.39	1		
		8	3	26.41	26.72	26.43	2			3	1	27.63	27.66	27.54	1		
		8	7	26.32	26.68	26.49	2			3	3	27.58	27.53	27.37	1		
	15	0	26.19	26.59	26.42	2	6		0	26.75	26.67	26.61	2				


Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

## 4.2 Modulation Characteristics Measurement

### 4.2.1 Limits of Modulation Characteristics

N/A




### 4.2.2 Test Setup



### 4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.


## 4.2.4 Test Results

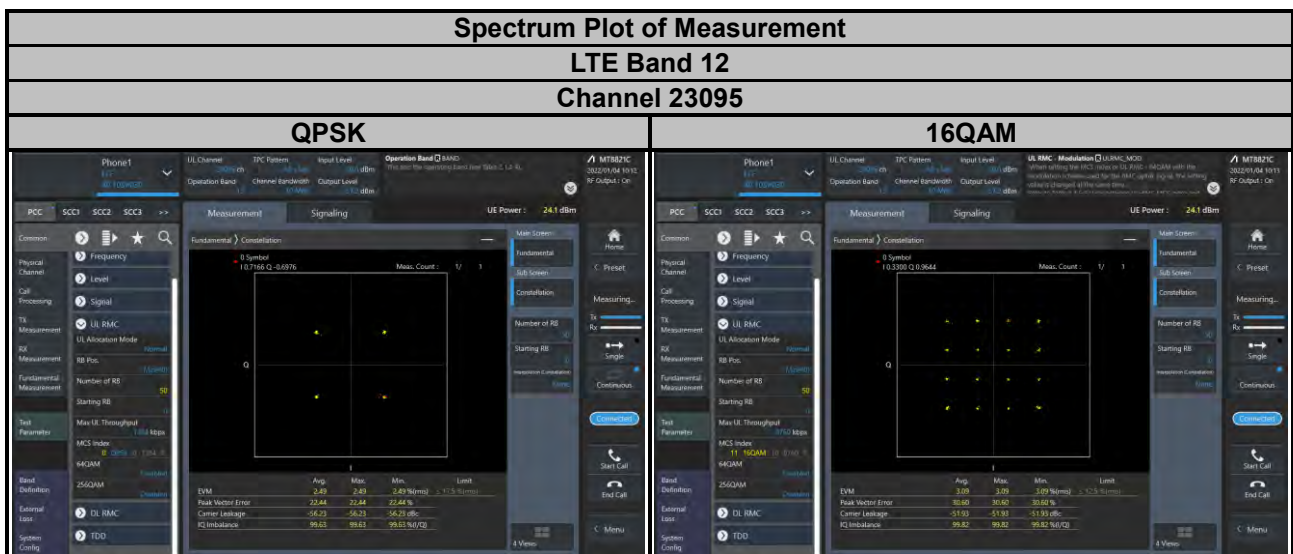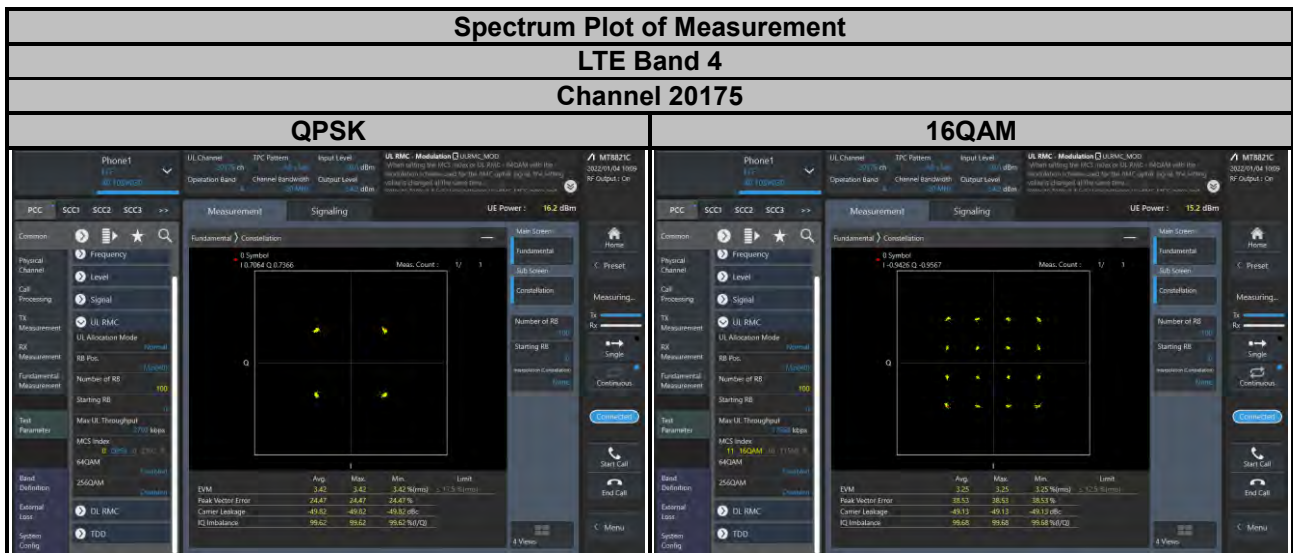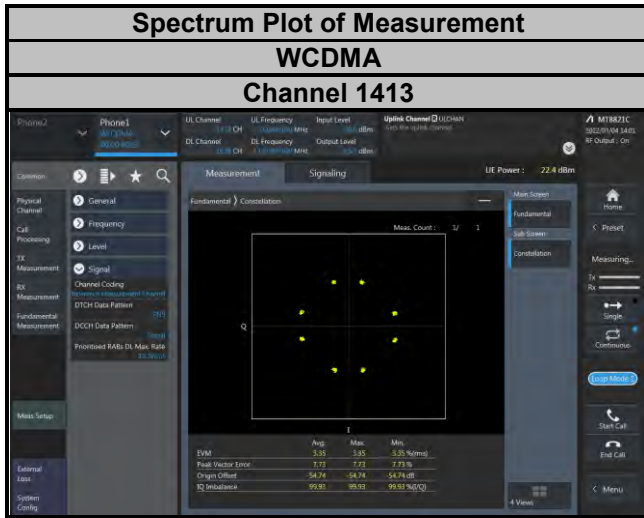




**Spectrum Plot of Measurement**  
**LTE Band 13**  
**Channel 23230**

**QPSK**

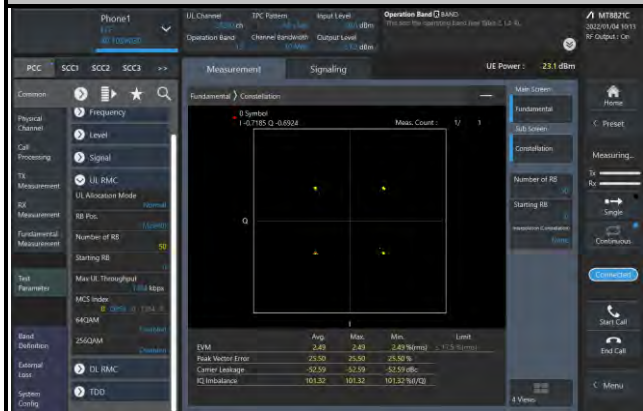


**16QAM**

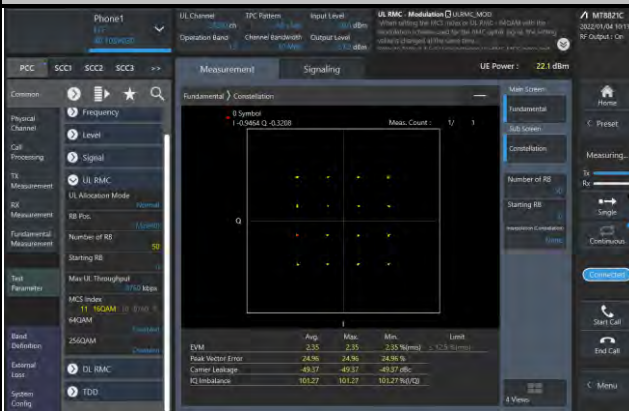


**Spectrum Plot of Measurement**  
**LTE Band 66**  
**Channel 132322**

**QPSK**

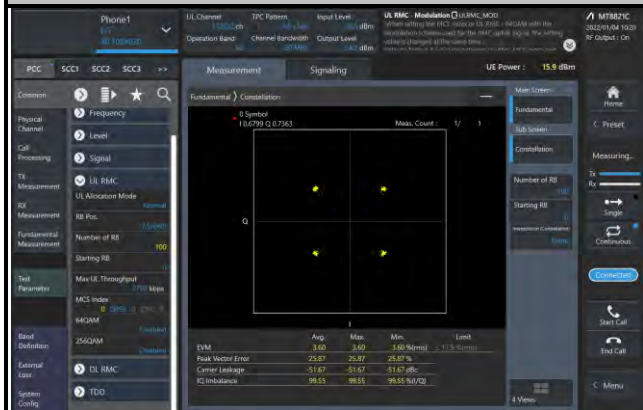

**16QAM**

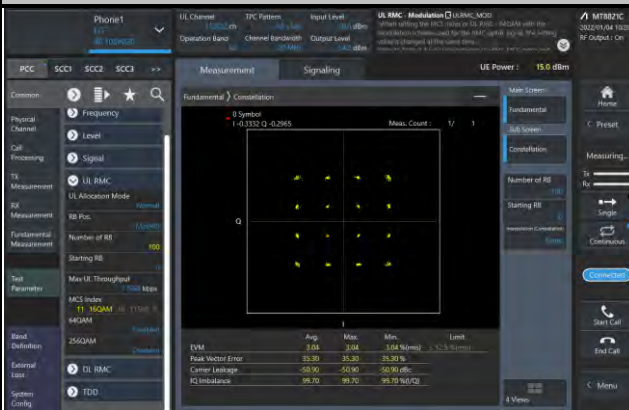

### 4.3 Frequency Stability Measurement

#### 4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

#### 4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^\circ\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**Note:** The frequency error was recorded frequency error from the communication simulator.

#### 4.3.3 Test Setup

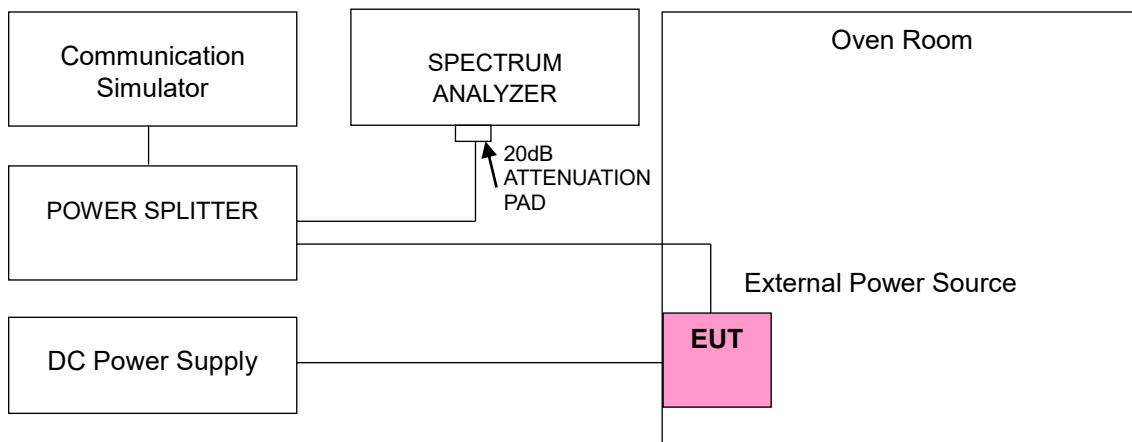



#### 4.3.4 Test Results

##### Frequency Error vs. Voltage

Voltage (Volts)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1712.400003	0.002	1752.600004	0.002
10.2	1712.400002	0.001	1752.600003	0.002
13.8	1712.400004	0.002	1752.600004	0.002

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

##### Frequency Error vs. Temperature

Temp. (°C)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.400004	0.002	1752.600001	0.001
-20	1712.400003	0.002	1752.600004	0.002
-10	1712.400004	0.002	1752.600002	0.001
0	1712.400003	0.001	1752.600002	0.001
10	1712.400004	0.002	1752.600004	0.002
20	1712.399998	-0.001	1752.599997	-0.002
30	1712.399998	-0.001	1752.599997	-0.002
40	1712.399997	-0.002	1752.599997	-0.002
50	1712.399997	-0.002	1752.599999	-0.001
60	1712.399996	-0.002	1752.599998	-0.001
70	1712.399997	-0.002	1752.599999	-0.001
80	1712.399998	-0.001	1752.599998	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1710.700003	0.002	1754.300004	0.002
10.2	1710.700002	0.001	1754.300002	0.001
13.8	1710.700002	0.001	1754.300002	0.001

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.700001	0.001	1754.300004	0.002
-20	1710.700003	0.002	1754.300004	0.002
-10	1710.700001	0.001	1754.300004	0.002
0	1710.700002	0.001	1754.300003	0.002
10	1710.700002	0.001	1754.300002	0.001
20	1710.699999	-0.001	1754.299998	-0.001
30	1710.699997	-0.002	1754.299999	-0.001
40	1710.699999	-0.001	1754.299996	-0.002
50	1710.699999	-0.001	1754.299999	-0.001
60	1710.699997	-0.002	1754.299997	-0.002
70	1710.699997	-0.002	1754.299998	-0.001
80	1710.699999	-0.001	1754.299996	-0.002

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1711.500002	0.001	1753.500003	0.001
10.2	1711.500004	0.002	1753.500003	0.002
13.8	1711.500001	0.001	1753.500004	0.002

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.500003	0.002	1753.500001	0.001
-20	1711.500004	0.002	1753.500003	0.002
-10	1711.500003	0.002	1753.500001	0.001
0	1711.500002	0.001	1753.500003	0.002
10	1711.500003	0.002	1753.500002	0.001
20	1711.499998	-0.001	1753.499997	-0.002
30	1711.499997	-0.002	1753.499997	-0.002
40	1711.499997	-0.002	1753.499999	-0.001
50	1711.499998	-0.001	1753.499999	-0.001
60	1711.499998	-0.001	1753.499998	-0.001
70	1711.499996	-0.002	1753.499997	-0.001
80	1711.499998	-0.001	1753.499999	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1712.500003	0.002	1752.500004	0.002
10.2	1712.500004	0.002	1752.500002	0.001
13.8	1712.500003	0.002	1752.500001	0.001

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.500003	0.002	1752.500004	0.002
-20	1712.500003	0.002	1752.500003	0.001
-10	1712.500003	0.002	1752.500003	0.002
0	1712.500002	0.001	1752.500001	0.001
10	1712.500002	0.001	1752.500001	0.001
20	1712.499998	-0.001	1752.499996	-0.002
30	1712.499999	-0.001	1752.499997	-0.002
40	1712.499997	-0.002	1752.499998	-0.001
50	1712.499998	-0.001	1752.499996	-0.002
60	1712.499997	-0.002	1752.499999	-0.001
70	1712.499997	-0.002	1752.499998	-0.001
80	1712.499997	-0.002	1752.499998	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1715.000004	0.002	1750.000003	0.001
10.2	1715.000002	0.001	1750.000002	0.001
13.8	1715.000003	0.002	1750.000002	0.001

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1715.000002	0.001	1750.000003	0.002
-20	1715.000002	0.001	1750.000004	0.002
-10	1715.000004	0.002	1750.000002	0.001
0	1715.000001	0.001	1750.000003	0.002
10	1715.000004	0.002	1750.000003	0.002
20	1714.999997	-0.002	1749.999996	-0.002
30	1714.999999	-0.001	1749.999999	-0.001
40	1714.999998	-0.001	1749.999999	-0.001
50	1714.999999	-0.001	1749.999996	-0.002
60	1714.999997	-0.002	1749.999997	-0.002
70	1714.999998	-0.001	1749.999996	-0.002
80	1714.999998	-0.001	1749.999997	-0.002

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1717.500002	0.001	1747.500003	0.002
10.2	1717.500003	0.002	1747.500002	0.001
13.8	1717.500003	0.002	1747.500002	0.001

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.500001	0.001	1747.500003	0.002
-20	1717.500001	0.001	1747.500002	0.001
-10	1717.500003	0.002	1747.500004	0.002
0	1717.500002	0.001	1747.500004	0.002
10	1717.500002	0.001	1747.500003	0.002
20	1717.499996	-0.002	1747.499998	-0.001
30	1717.499997	-0.002	1747.499998	-0.001
40	1717.499998	-0.001	1747.499999	-0.001
50	1717.499996	-0.002	1747.499999	-0.001
60	1717.499999	-0.001	1747.499999	-0.001
70	1717.499997	-0.002	1747.499997	-0.002
80	1717.499997	-0.002	1747.499998	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1720.000004	0.002	1745.000003	0.002
10.2	1720.000004	0.002	1745.000004	0.002
13.8	1720.000002	0.001	1745.000002	0.001

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1720.000004	0.002	1745.000002	0.001
-20	1720.000004	0.002	1745.000001	0.001
-10	1720.000004	0.002	1745.000002	0.001
0	1720.000003	0.002	1745.000002	0.001
10	1720.000002	0.001	1745.000002	0.001
20	1719.999997	-0.002	1744.999997	-0.002
30	1719.999998	-0.001	1744.999998	-0.001
40	1719.999998	-0.001	1744.999996	-0.002
50	1719.999998	-0.001	1744.999997	-0.002
60	1719.999999	-0.001	1744.999997	-0.002
70	1719.999997	-0.002	1744.999999	-0.001
80	1719.999998	-0.001	1744.999999	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	699.700002	0.003	715.300004	0.005
10.2	699.700002	0.003	715.300003	0.004
13.8	699.700003	0.005	715.300004	0.005

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	699.700002	0.003	715.300002	0.003
-20	699.700004	0.005	715.300003	0.004
-10	699.700002	0.002	715.300004	0.005
0	699.700002	0.003	715.300004	0.005
10	699.700003	0.004	715.300002	0.003
20	699.699996	-0.006	715.299999	-0.002
30	699.699998	-0.004	715.299997	-0.004
40	699.699998	-0.003	715.299998	-0.003
50	699.699997	-0.005	715.299996	-0.005
60	699.699998	-0.003	715.299997	-0.004
70	699.699998	-0.003	715.299997	-0.004
80	699.699997	-0.004	715.299998	-0.003

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.



Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	700.500002	0.003	714.500002	0.003
10.2	700.500004	0.005	714.500001	0.002
13.8	700.500003	0.004	714.500002	0.003

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	700.500002	0.003	714.500003	0.004
-20	700.500002	0.002	714.500003	0.005
-10	700.500002	0.003	714.500001	0.002
0	700.500004	0.005	714.500004	0.005
10	700.500004	0.006	714.500002	0.003
20	700.499997	-0.004	714.499997	-0.004
30	700.499997	-0.004	714.499999	-0.002
40	700.499997	-0.004	714.499998	-0.002
50	700.499998	-0.003	714.499997	-0.004
60	700.499997	-0.005	714.499998	-0.003
70	700.499998	-0.002	714.499998	-0.002
80	700.499997	-0.004	714.499996	-0.005

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	701.500003	0.004	713.500002	0.002
10.2	701.500002	0.003	713.500002	0.003
13.8	701.500002	0.003	713.500004	0.005

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	701.500004	0.005	713.500002	0.002
-20	701.500003	0.004	713.500003	0.004
-10	701.500001	0.001	713.500002	0.003
0	701.500004	0.006	713.500002	0.003
10	701.500002	0.003	713.500004	0.006
20	701.499997	-0.004	713.499996	-0.006
30	701.499998	-0.003	713.499997	-0.004
40	701.499998	-0.003	713.499999	-0.002
50	701.499997	-0.004	713.499998	-0.004
60	701.499999	-0.002	713.499996	-0.005
70	701.499999	-0.002	713.499998	-0.003
80	701.499998	-0.002	713.499997	-0.005

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	704.000003	0.004	711.000004	0.005
10.2	704.000003	0.004	711.000002	0.003
13.8	704.000003	0.004	711.000002	0.003

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	704.000003	0.005	711.000004	0.005
-20	704.000002	0.002	711.000003	0.004
-10	704.000002	0.003	711.000002	0.002
0	704.000003	0.004	711.000004	0.005
10	704.000003	0.005	711.000002	0.003
20	703.999996	-0.006	710.999999	-0.002
30	703.999997	-0.004	710.999998	-0.002
40	703.999997	-0.004	710.999997	-0.004
50	703.999997	-0.005	710.999999	-0.002
60	703.999996	-0.005	710.999999	-0.002
70	703.999996	-0.006	710.999998	-0.003
80	703.999996	-0.005	710.999999	-0.002

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 13			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	779.500003	0.003	784.500003	0.003
10.2	779.500002	0.003	784.500003	0.004
13.8	779.500003	0.003	784.500004	0.005

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 13			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	779.500003	0.004	784.500001	0.002
-20	779.500001	0.002	784.500003	0.003
-10	779.500003	0.004	784.500002	0.003
0	779.500002	0.002	784.500001	0.002
10	779.500003	0.004	784.500004	0.004
20	779.499997	-0.004	784.499998	-0.003
30	779.499999	-0.001	784.499998	-0.003
40	779.499999	-0.001	784.499999	-0.001
50	779.499998	-0.002	784.499997	-0.003
60	779.499996	-0.005	784.499999	-0.002
70	779.499996	-0.005	784.499998	-0.003
80	779.499998	-0.002	784.499997	-0.004

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 13	
	Channel Bandwidth: 10 MHz	
	Frequency (MHz)	Frequency Error (ppm)
12	782.000002	0.002
10.2	782.000002	0.002
13.8	782.000003	0.004

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 13	
	Channel Bandwidth: 10 MHz	
	Frequency (MHz)	Frequency Error (ppm)
-30	782.000002	0.003
-20	782.000003	0.004
-10	782.000004	0.005
0	782.000001	0.001
10	782.000001	0.002
20	781.999998	-0.002
30	781.999996	-0.005
40	781.999997	-0.004
50	781.999997	-0.003
60	781.999997	-0.004
70	781.999998	-0.003
80	781.999998	-0.002

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1710.700001	0.001	1779.300003	0.002
10.2	1710.700003	0.002	1779.300001	0.001
13.8	1710.700002	0.001	1779.300003	0.002

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.700004	0.002	1779.300003	0.001
-20	1710.700004	0.002	1779.300003	0.002
-10	1710.700003	0.002	1779.300001	0.001
0	1710.700002	0.001	1779.300003	0.001
10	1710.700003	0.002	1779.300002	0.001
20	1710.699998	-0.001	1779.299997	-0.002
30	1710.699997	-0.002	1779.299998	-0.001
40	1710.699998	-0.001	1779.299999	-0.001
50	1710.699996	-0.002	1779.299999	-0.001
60	1710.699999	-0.001	1779.299998	-0.001
70	1710.699998	-0.001	1779.299996	-0.002
80	1710.699998	-0.001	1779.299998	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1711.500003	0.002	1778.500002	0.001
10.2	1711.500001	0.001	1778.500001	0.001
13.8	1711.500002	0.001	1778.500004	0.002

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.500004	0.002	1778.500001	0.001
-20	1711.500001	0.001	1778.500002	0.001
-10	1711.500001	0.001	1778.500002	0.001
0	1711.500002	0.001	1778.500001	0.001
10	1711.500002	0.001	1778.500002	0.001
20	1711.499997	-0.002	1778.499999	-0.001
30	1711.499999	-0.001	1778.499999	-0.001
40	1711.499999	-0.001	1778.499996	-0.002
50	1711.499997	-0.002	1778.499997	-0.002
60	1711.499999	-0.001	1778.499997	-0.002
70	1711.499998	-0.001	1778.499999	-0.001
80	1711.499998	-0.001	1778.499997	-0.002

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1712.500004	0.002	1777.500002	0.001
10.2	1712.500002	0.001	1777.500003	0.001
13.8	1712.500003	0.002	1777.500002	0.001

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.500002	0.001	1777.500004	0.002
-20	1712.500003	0.002	1777.500001	0.001
-10	1712.500004	0.002	1777.500004	0.002
0	1712.500004	0.002	1777.500001	0.001
10	1712.500004	0.002	1777.500002	0.001
20	1712.499998	-0.001	1777.499997	-0.002
30	1712.499996	-0.002	1777.499997	-0.002
40	1712.499999	-0.001	1777.499996	-0.002
50	1712.499998	-0.001	1777.499999	-0.001
60	1712.499996	-0.002	1777.499999	-0.001
70	1712.499998	-0.001	1777.499998	-0.001
80	1712.499996	-0.002	1777.499998	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.



Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1715.000004	0.002	1775.000004	0.002
10.2	1715.000002	0.001	1775.000003	0.002
13.8	1715.000004	0.002	1775.000003	0.002

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1715.000001	0.001	1775.000002	0.001
-20	1715.000003	0.002	1775.000004	0.002
-10	1715.000002	0.001	1775.000002	0.001
0	1715.000003	0.002	1775.000002	0.001
10	1715.000002	0.001	1775.000001	0.001
20	1714.999999	-0.001	1774.999997	-0.002
30	1714.999996	-0.002	1774.999997	-0.002
40	1714.999996	-0.002	1774.999997	-0.002
50	1714.999998	-0.001	1774.999997	-0.002
60	1714.999999	-0.001	1774.999997	-0.002
70	1714.999998	-0.001	1774.999997	-0.001
80	1714.999997	-0.002	1774.999998	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1717.500002	0.001	1772.500002	0.001
10.2	1717.500002	0.001	1772.500002	0.001
13.8	1717.500002	0.001	1772.500004	0.002

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.500004	0.002	1772.500003	0.001
-20	1717.500004	0.002	1772.500001	0.001
-10	1717.500002	0.001	1772.500003	0.002
0	1717.500002	0.001	1772.500003	0.002
10	1717.500002	0.001	1772.500003	0.002
20	1717.499997	-0.002	1772.499999	-0.001
30	1717.499999	-0.001	1772.499998	-0.001
40	1717.499996	-0.002	1772.499998	-0.001
50	1717.499997	-0.002	1772.499997	-0.002
60	1717.499998	-0.001	1772.499996	-0.002
70	1717.499997	-0.002	1772.499999	-0.001
80	1717.499997	-0.002	1772.499997	-0.002

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
12	1720.000003	0.002	1770.000004	0.002
10.2	1720.000002	0.001	1770.000003	0.002
13.8	1720.000003	0.002	1770.000001	0.001

**Note:** The applicant defined the normal working voltage of the battery is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1720.000002	0.001	1770.000004	0.002
-20	1720.000003	0.002	1770.000003	0.002
-10	1720.000002	0.001	1770.000002	0.001
0	1720.000003	0.002	1770.000004	0.002
10	1720.000003	0.002	1770.000003	0.002
20	1719.999998	-0.001	1769.999998	-0.001
30	1719.999997	-0.002	1769.999999	-0.001
40	1719.999996	-0.002	1769.999999	-0.001
50	1719.999996	-0.002	1769.999996	-0.002
60	1719.999997	-0.002	1769.999997	-0.002
70	1719.999998	-0.001	1769.999999	-0.001
80	1719.999999	-0.001	1769.999998	-0.001

**Note:**

1. The applicant declared that the normal operating temperature of the EUT is from -30°C to 80°C.
2. The EUT would shut down automatically as below -30°C.

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Limits of Occupied Bandwidth Measurement


The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.4.2 Test Procedure

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Measurement method, please refer to section 5.4.4 of ANSI C63.26. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

### 4.4.3 Test Setup

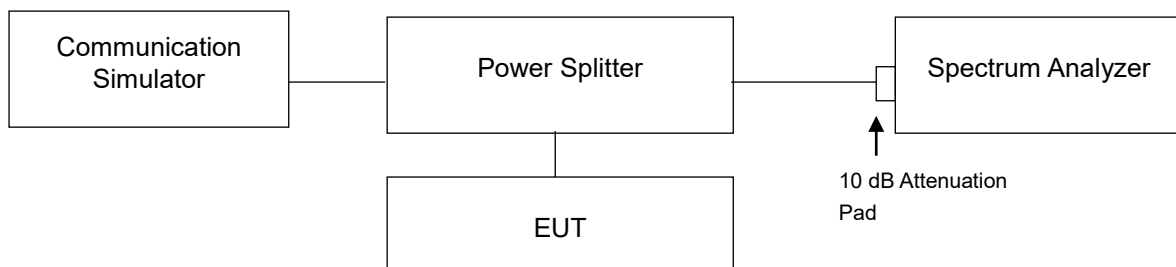


#### 4.4.4 Test Result


WCDMA			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1312	1712.4	4.14	4.72
1413	1732.6	4.15	4.76
1513	1752.6	4.14	4.71



LTE Band 4					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19957	1710.7	1.09	1.09	1.23	1.22
20175	1732.5	1.09	1.09	1.23	1.23
20393	1754.3	1.09	1.09	1.23	1.22
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19965	1711.5	2.70	2.70	2.94	2.94
20175	1732.5	2.70	2.70	2.96	2.95
20385	1753.5	2.70	2.70	2.93	2.95

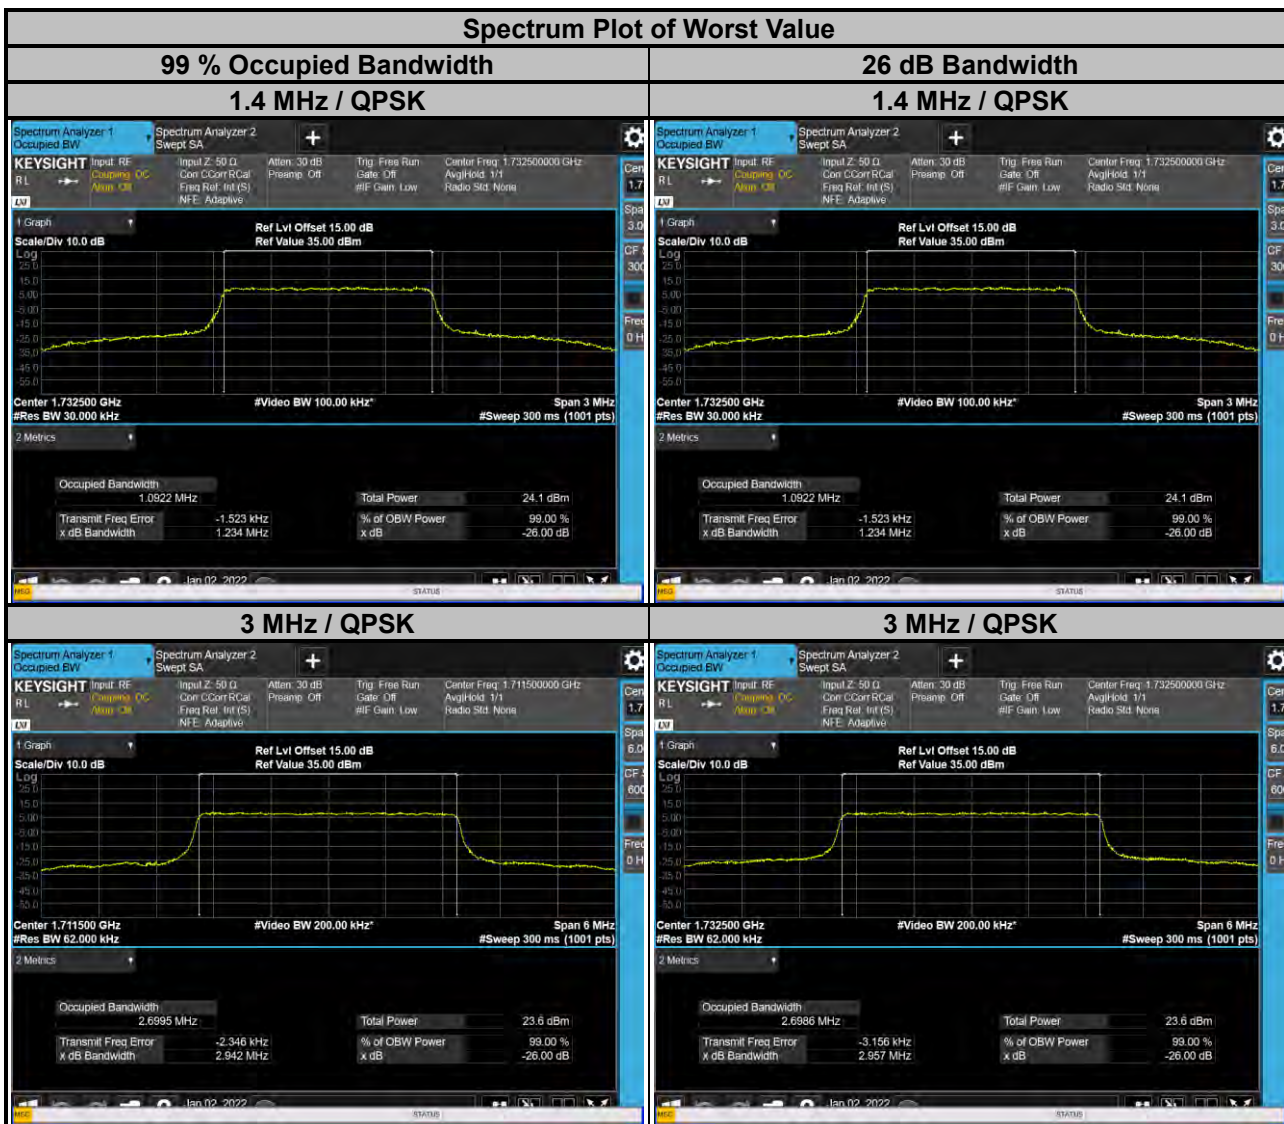

LTE Band 4					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19975	1712.5	4.50	4.49	4.84	4.82
20175	1732.5	4.50	4.49	4.89	4.83
20375	1752.5	4.49	4.49	4.82	4.80
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20000	1715.0	8.98	8.98	9.54	9.52
20175	1732.5	8.97	8.96	9.56	9.53
20350	1750.0	8.98	8.98	9.54	9.51

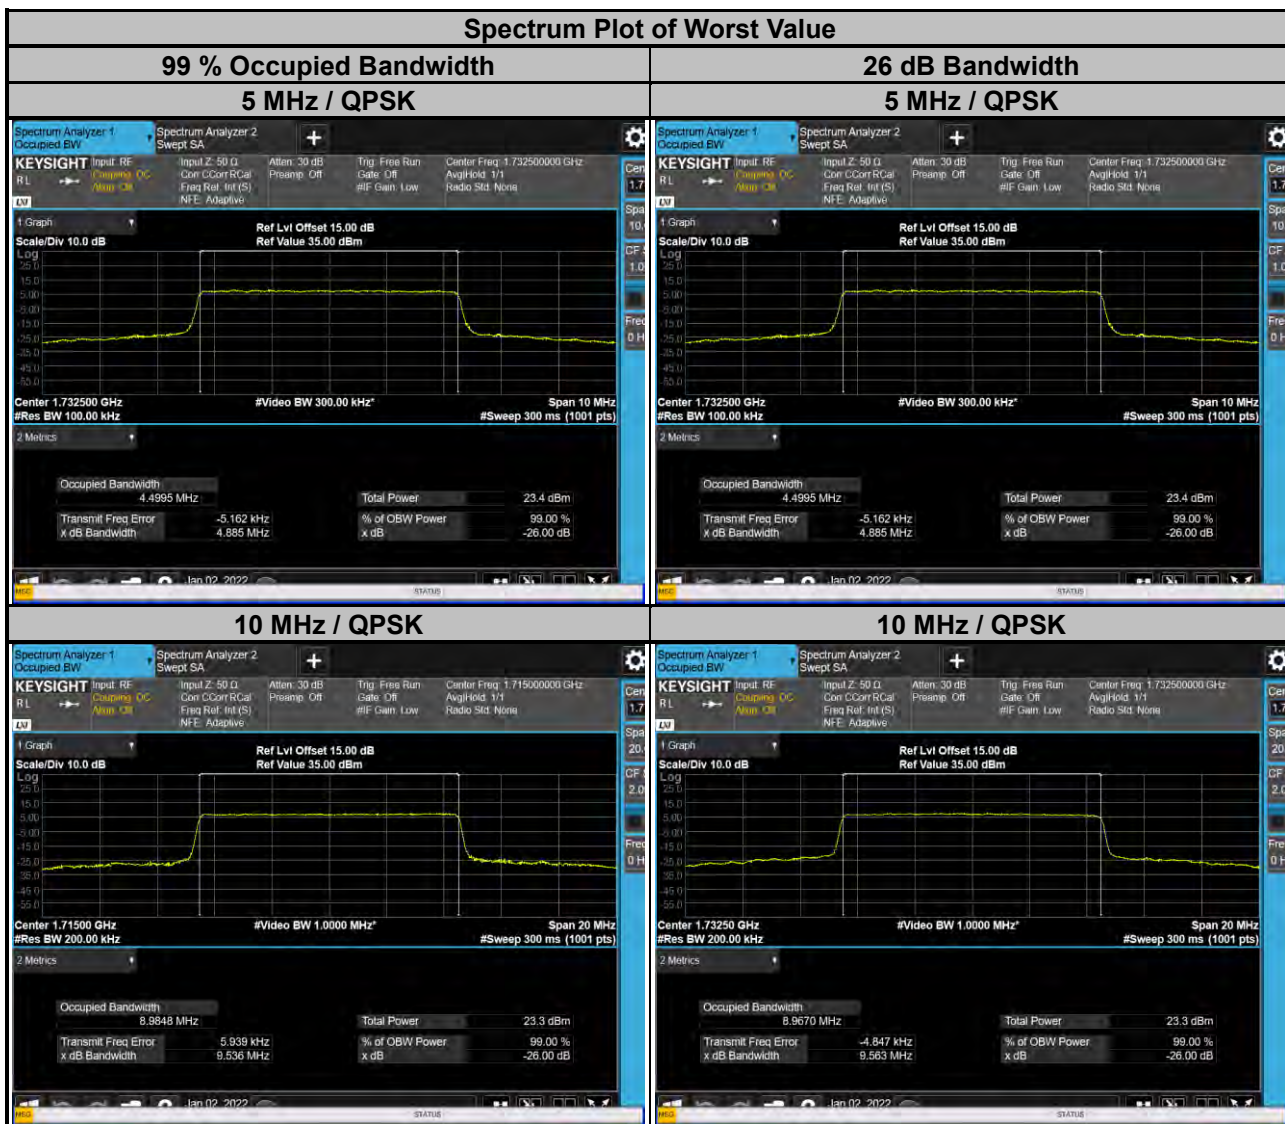




LTE Band 4					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20025	1717.5	13.50	13.49	14.26	14.25
20175	1732.5	13.44	13.43	14.26	14.25
20325	1747.5	13.49	13.47	14.27	14.27


  

Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20050	1720.0	17.99	18.00	19.04	19.04
20175	1732.5	17.88	17.89	19.04	19.03
20300	1745.0	17.99	18.00	19.09	19.05

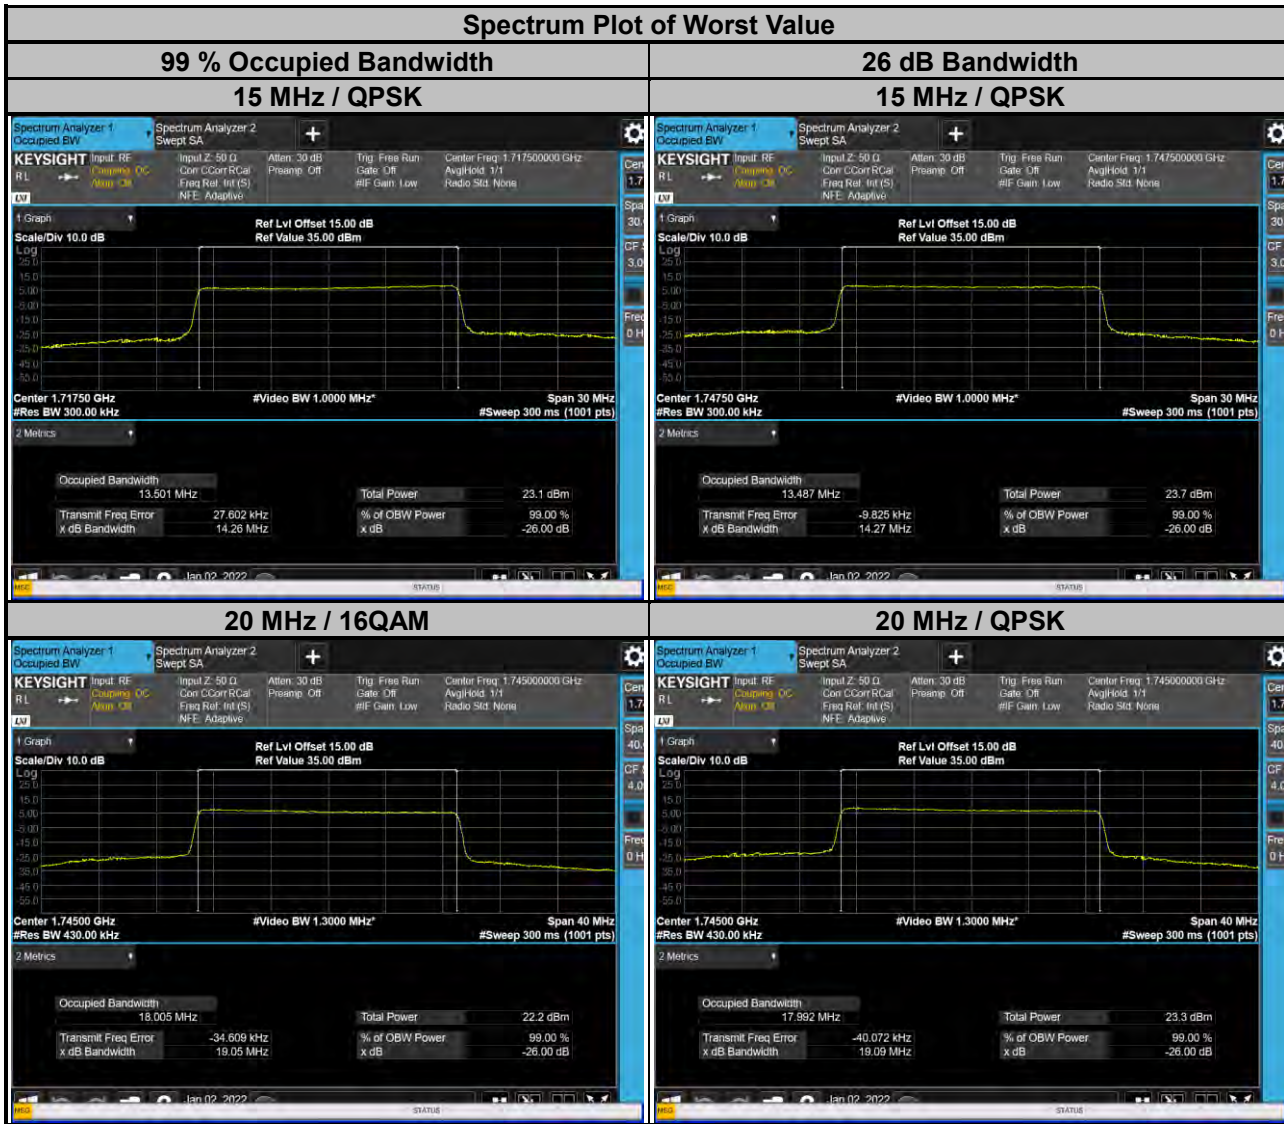





LTE Band 12					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23017	699.7	1.09	1.09	1.24	1.25
23095	707.5	1.09	1.09	1.22	1.21
23173	715.3	1.09	1.09	1.23	1.21
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23025	700.5	2.70	2.70	2.96	2.97
23095	707.5	2.70	2.69	2.92	2.92
23165	714.5	2.70	2.70	2.92	2.94

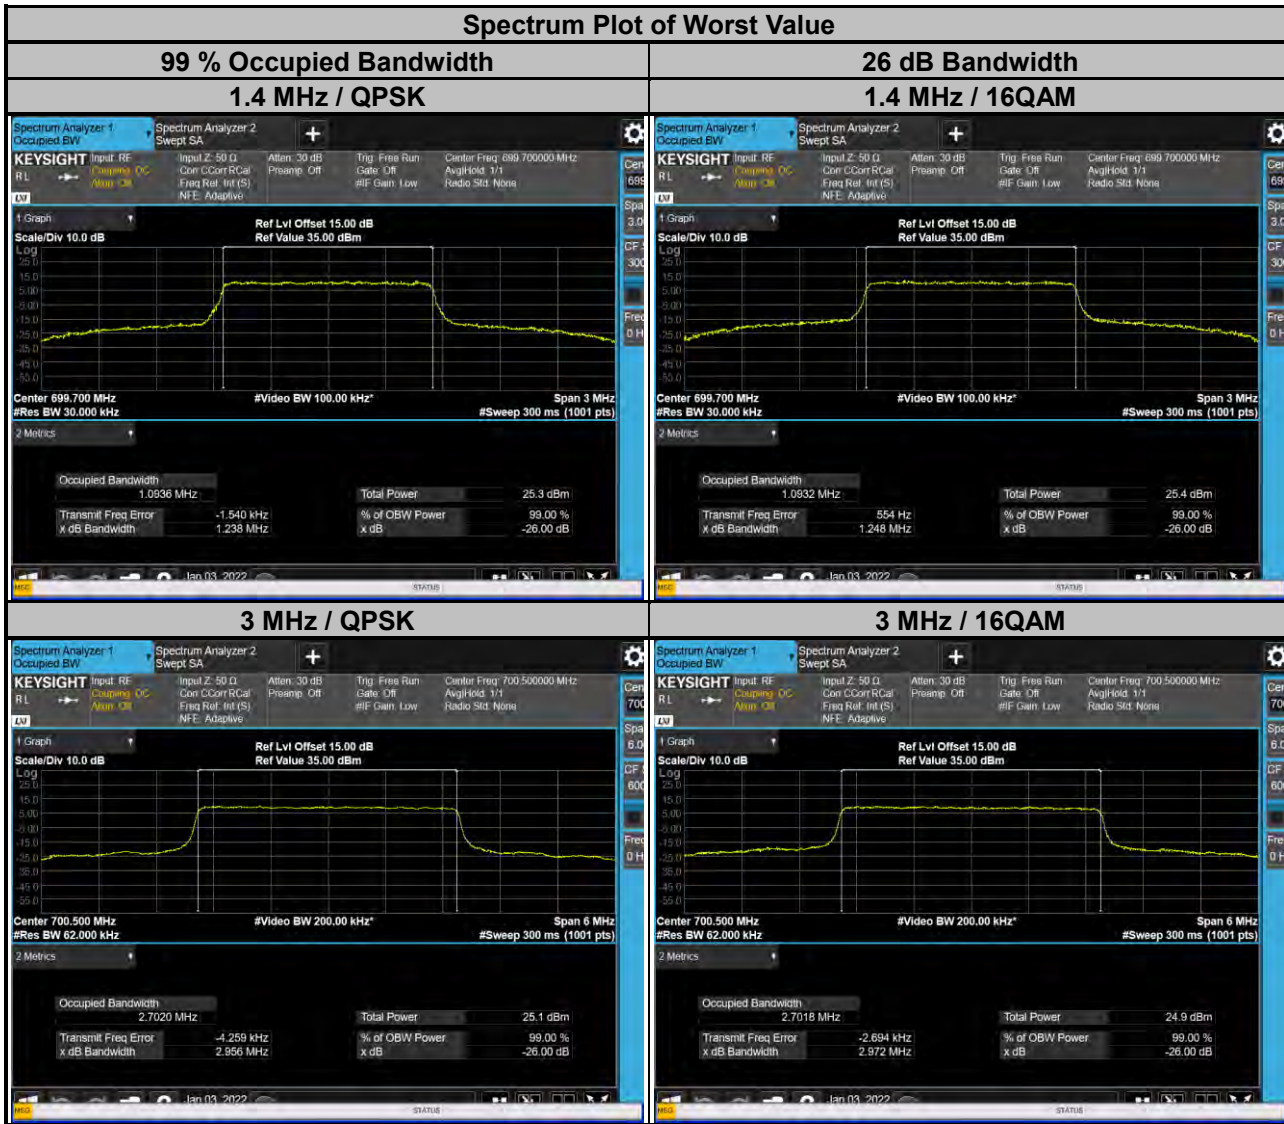

LTE Band 12					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23035	701.5	4.50	4.50	4.84	4.83
23095	707.5	4.49	4.49	4.83	4.80
23155	713.5	4.50	4.50	4.83	4.81
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23060	704.0	9.00	9.01	9.55	9.56
23095	707.5	8.96	8.97	9.52	9.50
23130	711.0	8.94	8.95	9.49	9.50

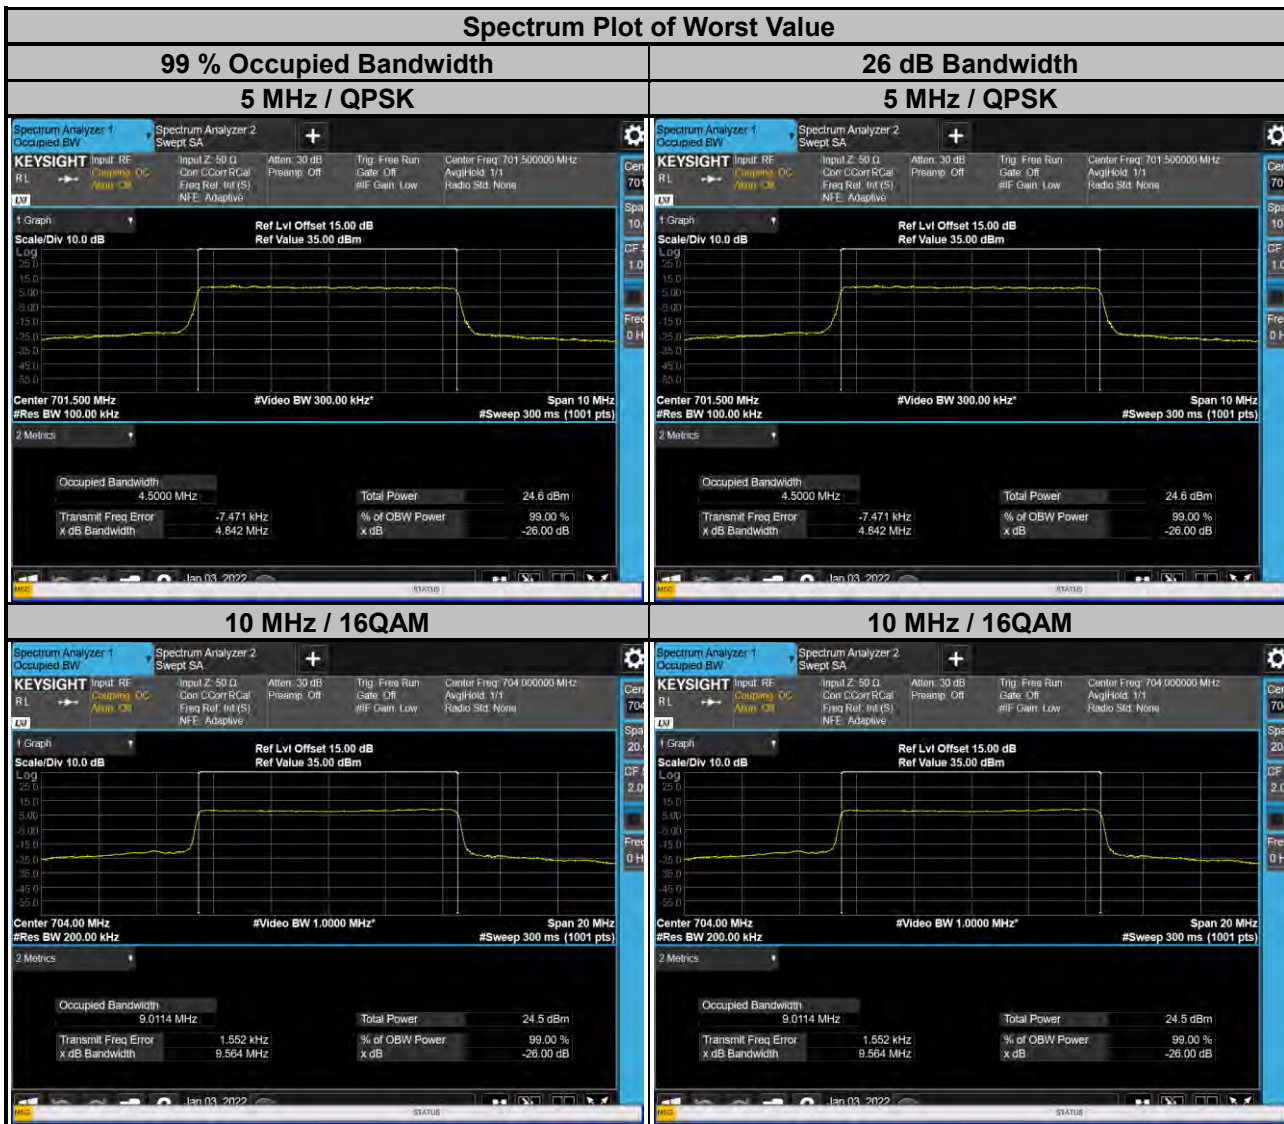


LTE Band 13					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23205	779.5	4.49	4.48	4.82	4.79
23230	782.0	4.49	4.49	4.84	4.80
23255	784.5	4.50	4.49	4.84	4.80
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23230	782.0	8.96	8.96	9.50	9.53

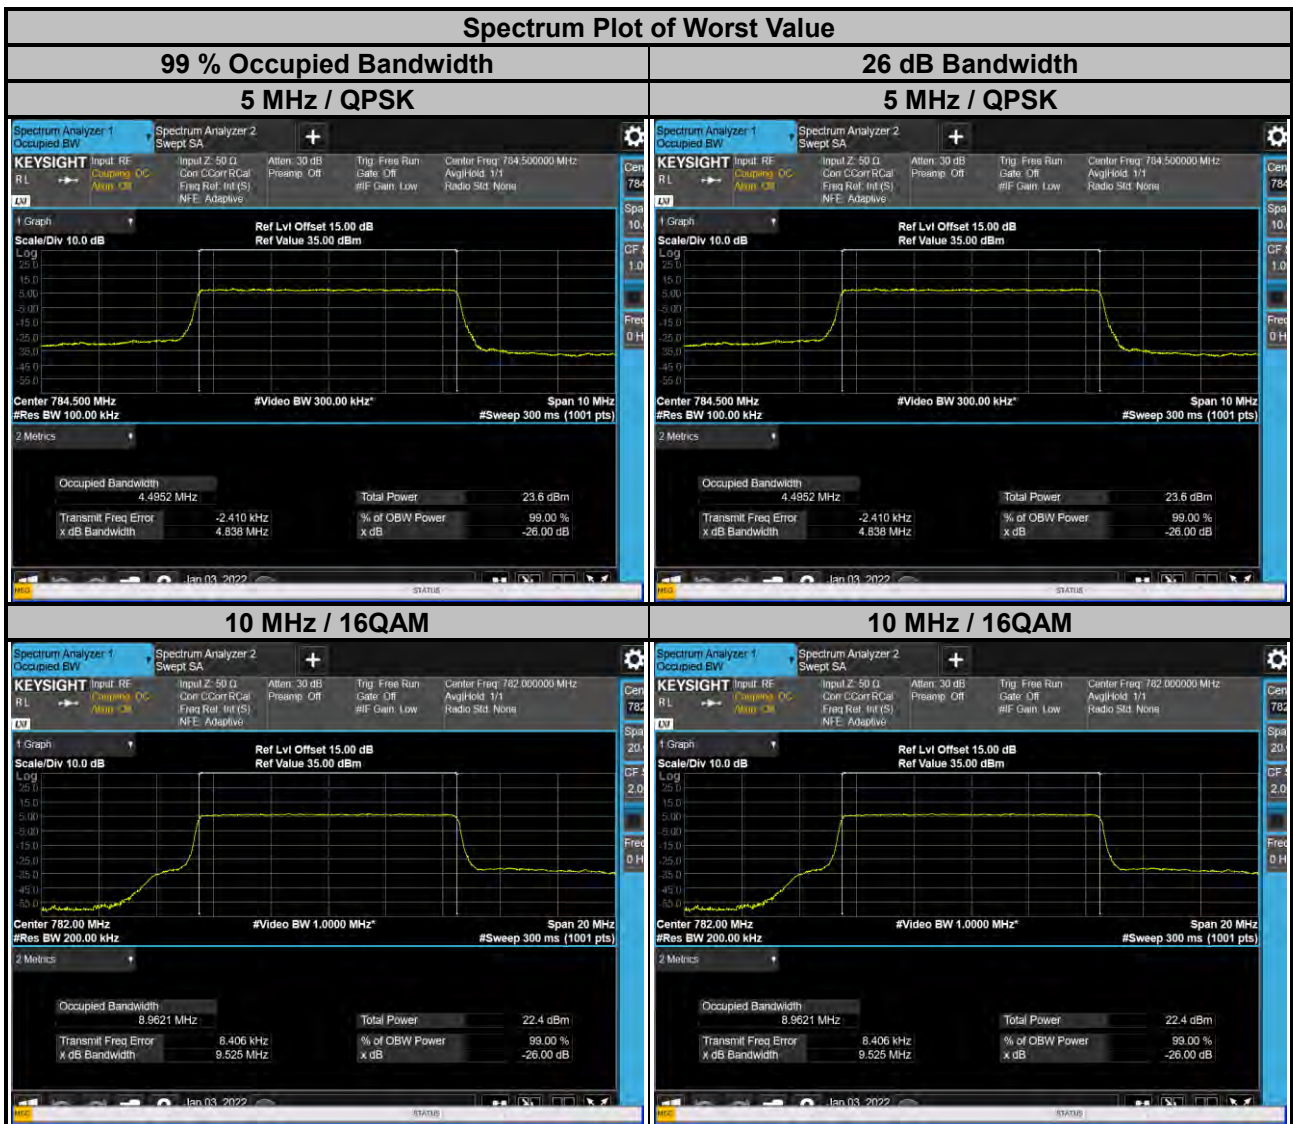




LTE Band 66					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
131979	1710.7	1.09	1.09	1.23	1.22
132322	1745.0	1.09	1.09	1.23	1.22
132665	1779.3	1.09	1.09	1.23	1.22
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
131987	1711.5	2.70	2.70	2.94	2.94
132322	1745.0	2.70	2.70	2.93	2.94
132657	1778.5	2.70	2.70	2.95	2.94

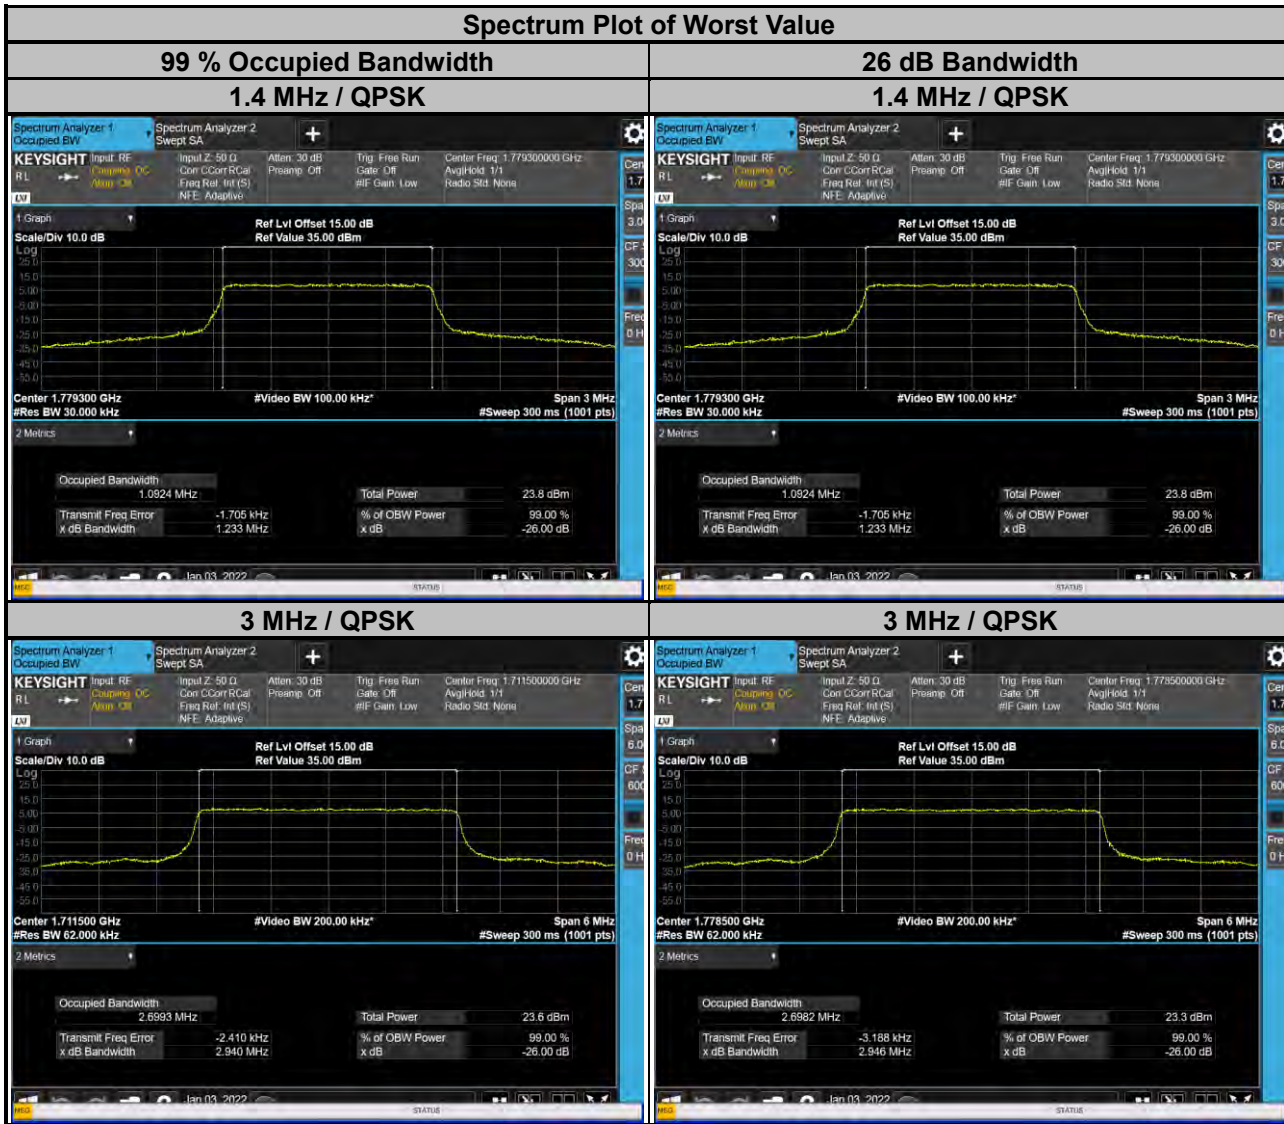

LTE Band 66					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
131997	1712.5	4.49	4.49	4.83	4.82
132322	1745.0	4.49	4.49	4.84	4.81
132647	1777.5	4.49	4.49	4.83	4.81


Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
132022	1715.0	8.98	8.98	9.54	9.52
132322	1745.0	8.98	8.97	9.53	9.52
132622	1775.0	8.98	8.97	9.54	9.53

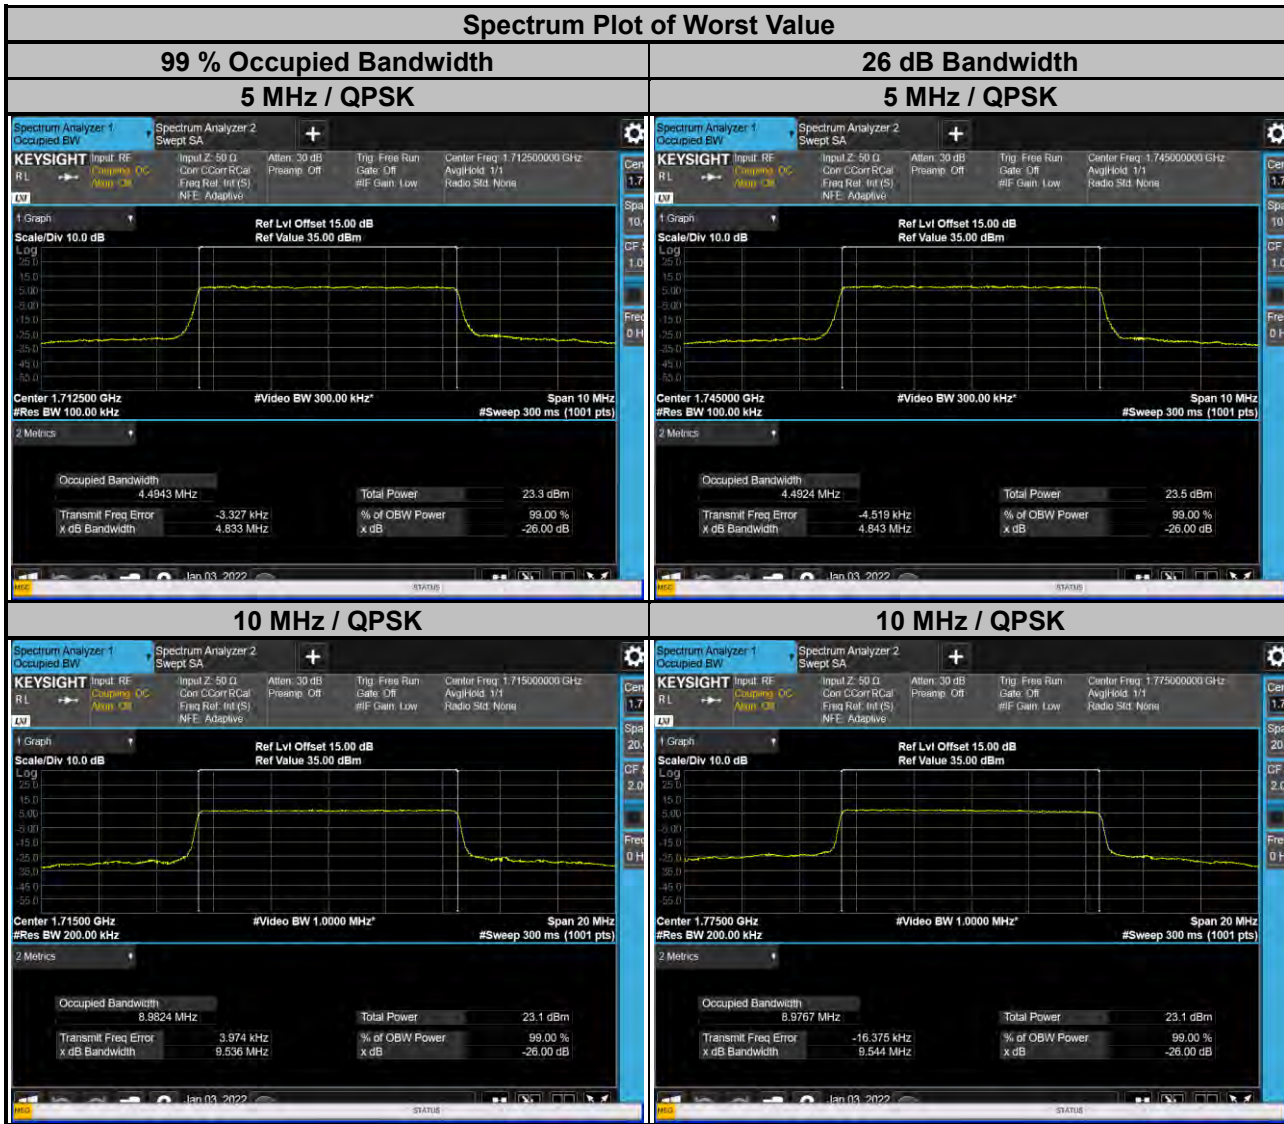

LTE Band 66					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
132047	1717.5	13.50	13.48	14.26	14.26
132322	1745.0	13.49	13.47	14.27	14.27
132597	1772.5	13.45	13.44	14.26	14.25

Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
132072	1720.0	17.98	18.00	19.03	19.03
132322	1745.0	17.99	17.99	19.07	19.05
132572	1770.0	17.90	17.91	19.04	19.01



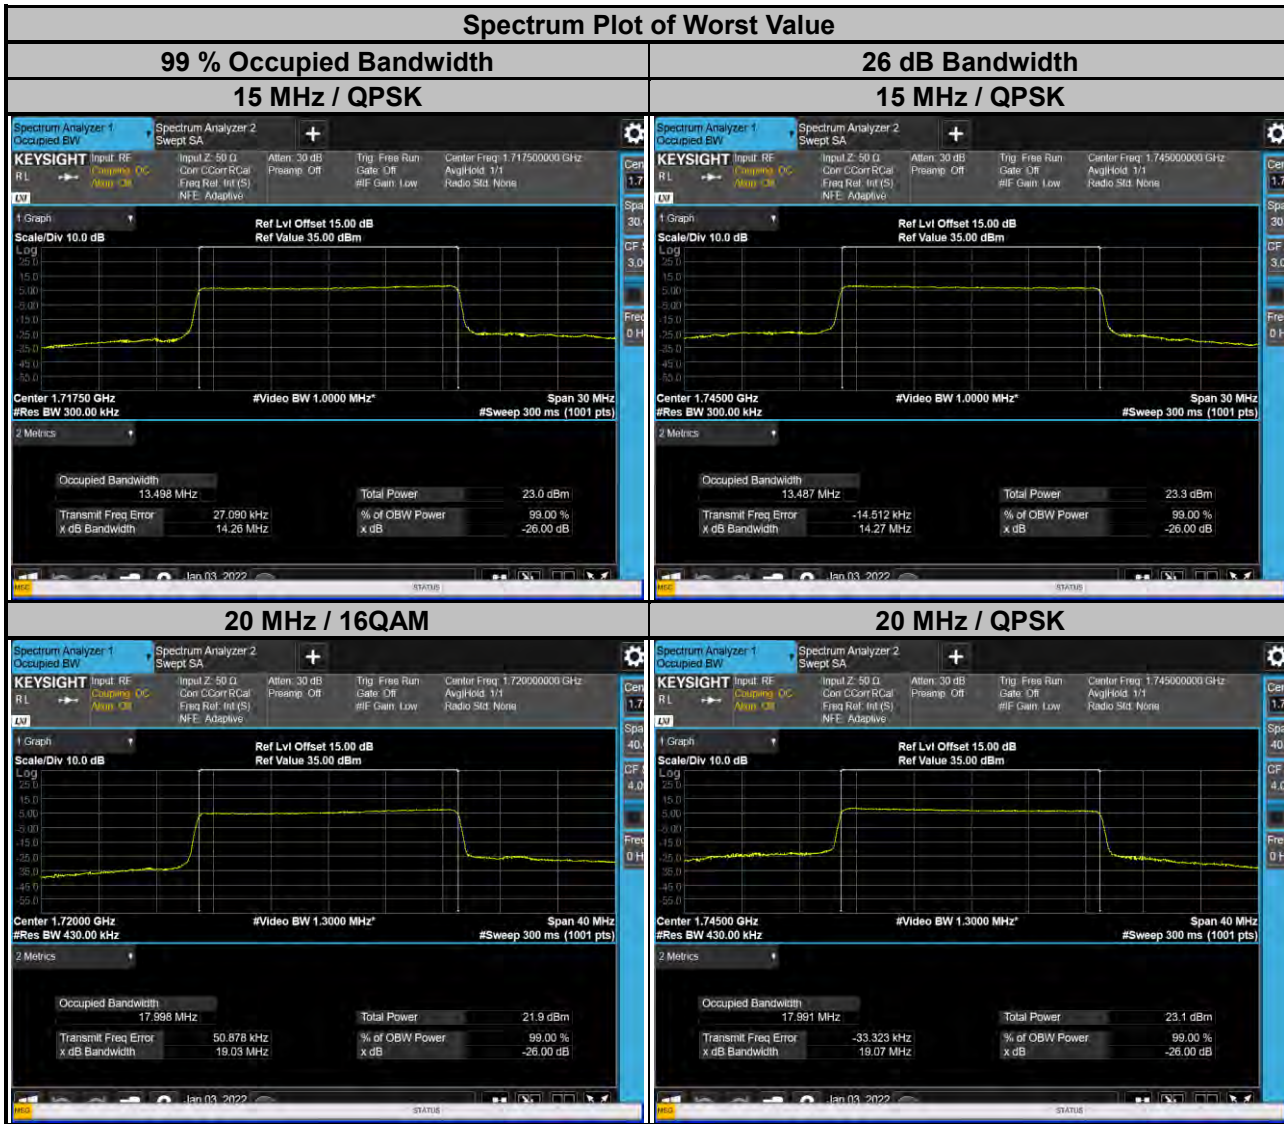

## 4.5 Band Edge Measurement

### 4.5.1 Limits of Band Edge Measurement

For WCDMA band 4, LTE Band 4, 66:

According to FCC 27.53(h), for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz, 1915-1920MHz, 1995-2000 MHz, 2000-2020MHz, 2110-2155MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log (P)$  dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

For LTE Band 12:


According to FCC 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For LTE Band 13:

According to FCC 27.53(c)(2), for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to 27.53(c)(4), on all frequencies between 763-775MHz and 793-805MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations

### 4.5.2 Test Setup


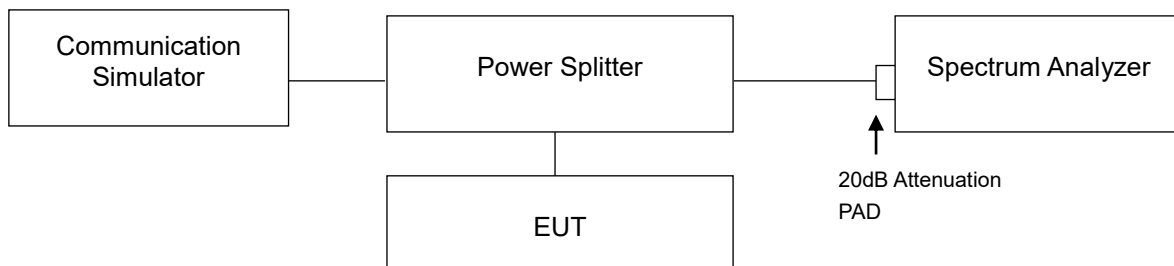


#### 4.5.3 Test Procedures

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (WCDMA).
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz or 30 kHz and VB of the spectrum is 51 kHz or 100 kHz (LTE Bandwidth 1.4 MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (LTE Bandwidth 5 MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- g. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- h. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- i. Record the max. trace plot into the test report.





### 4.5.4 Test Results

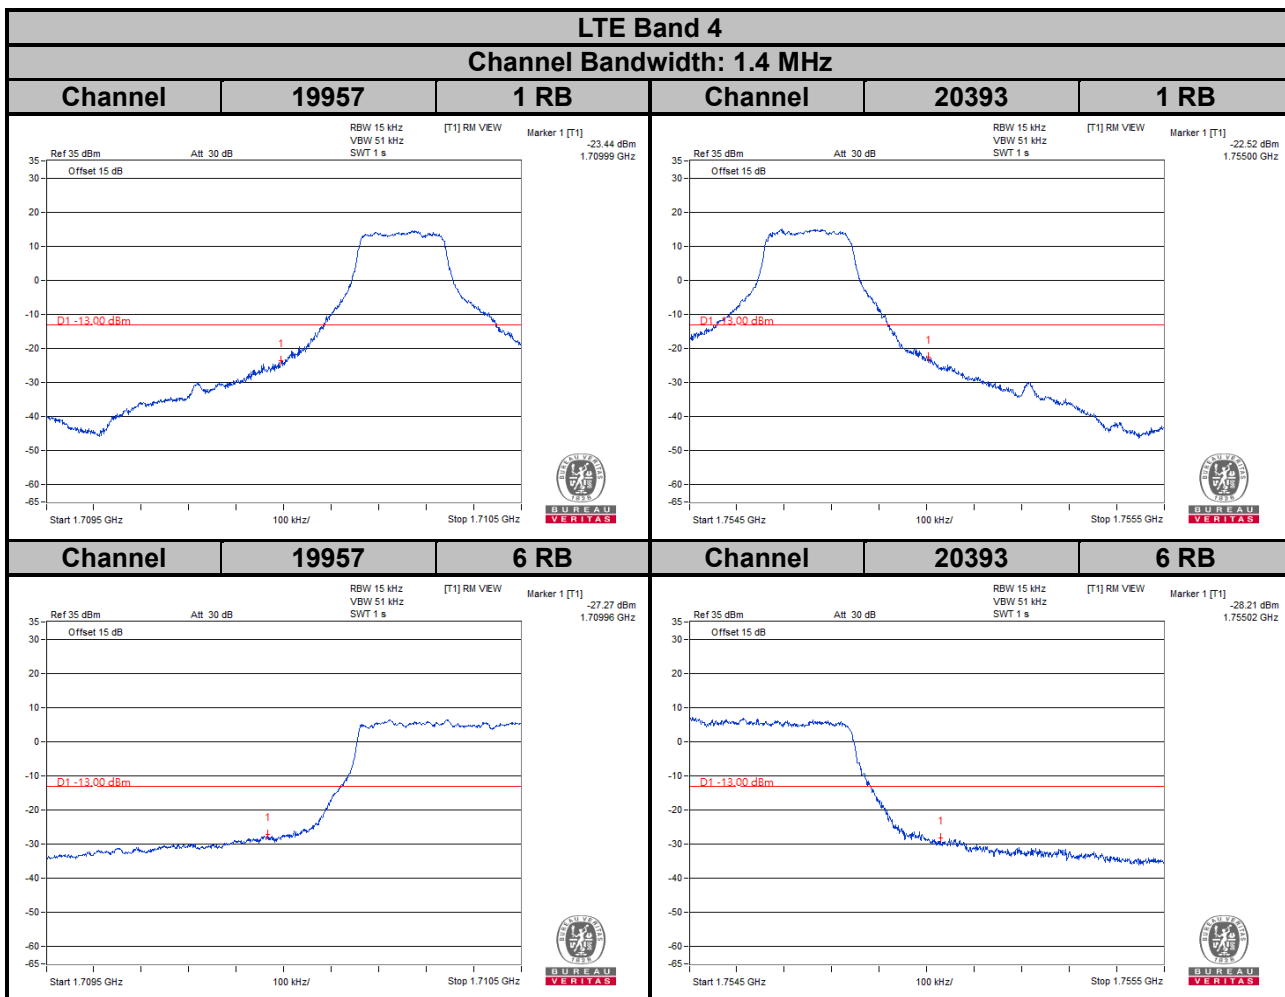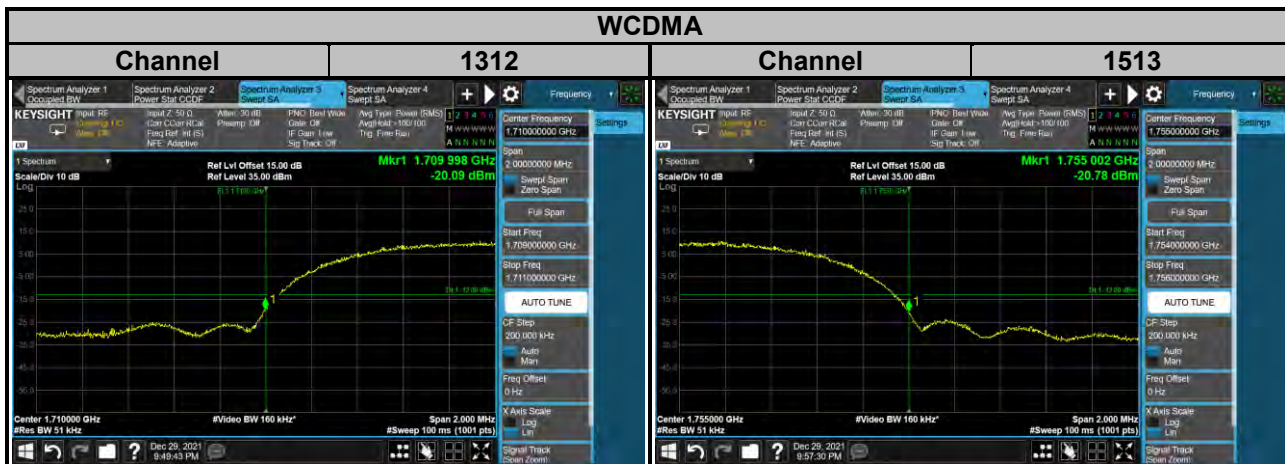



LTE Band 4

Channel Bandwidth: 3 MHz

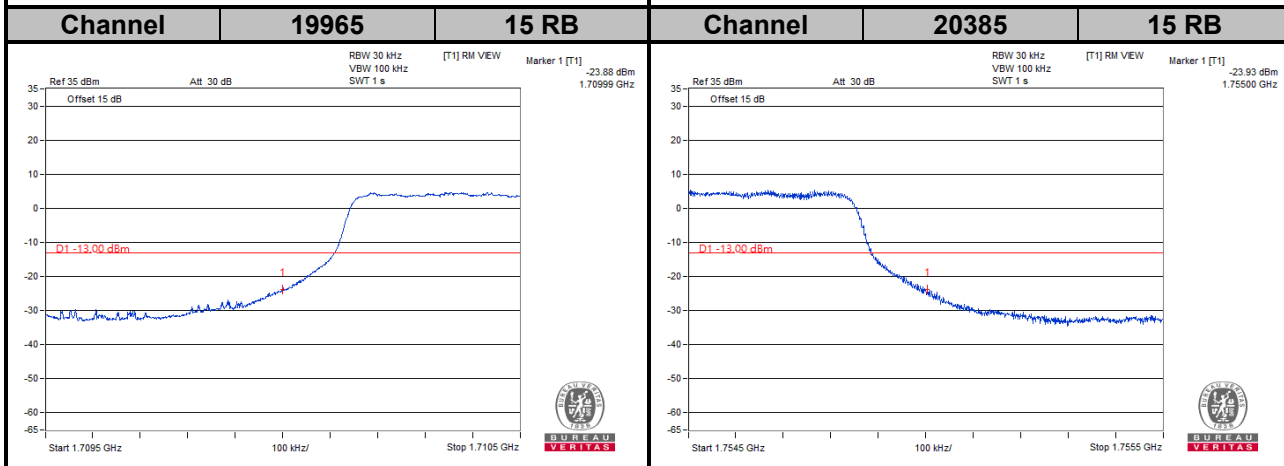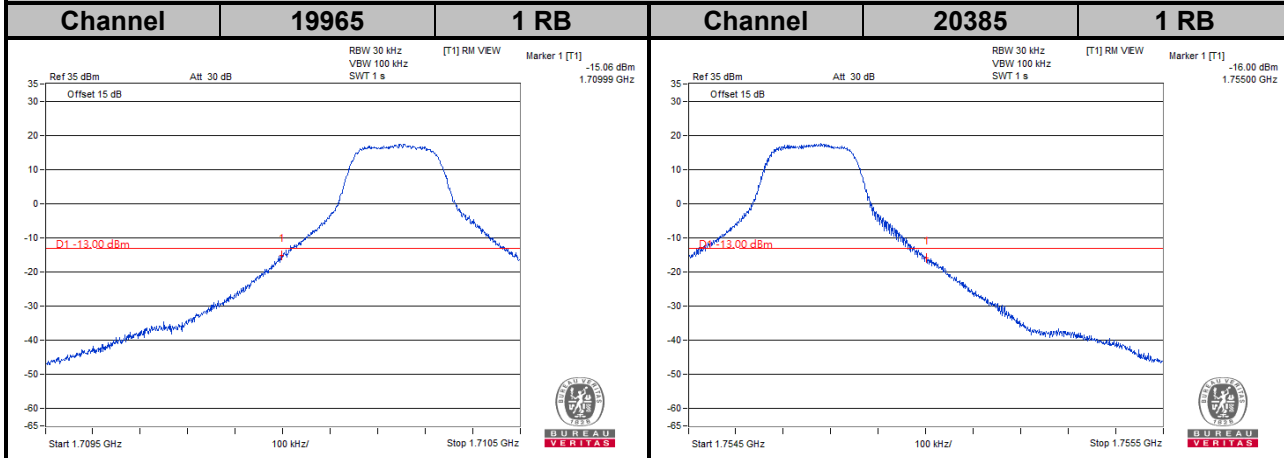



LTE Band 4

Channel Bandwidth: 5 MHz

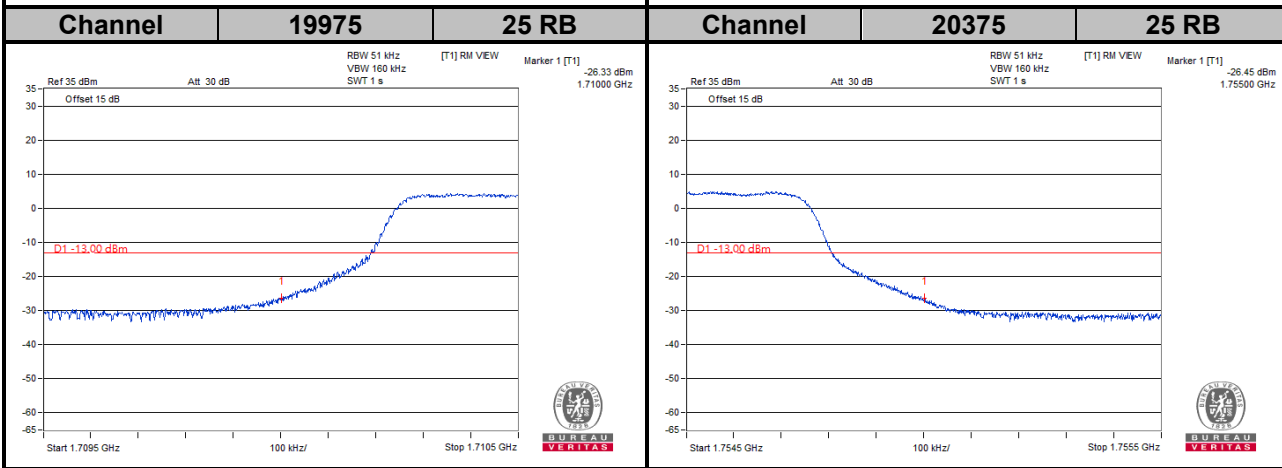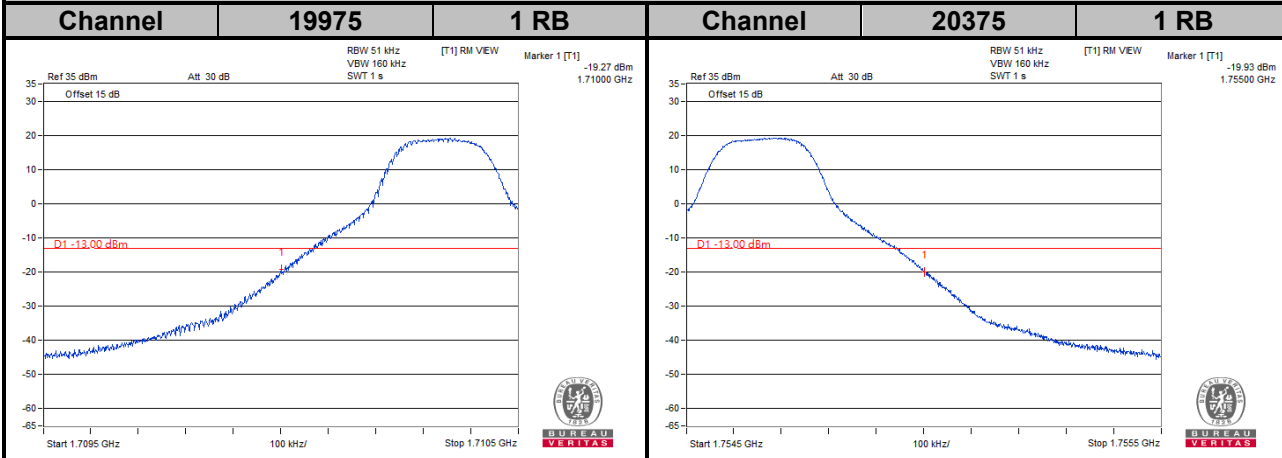



LTE Band 4

Channel Bandwidth: 10 MHz

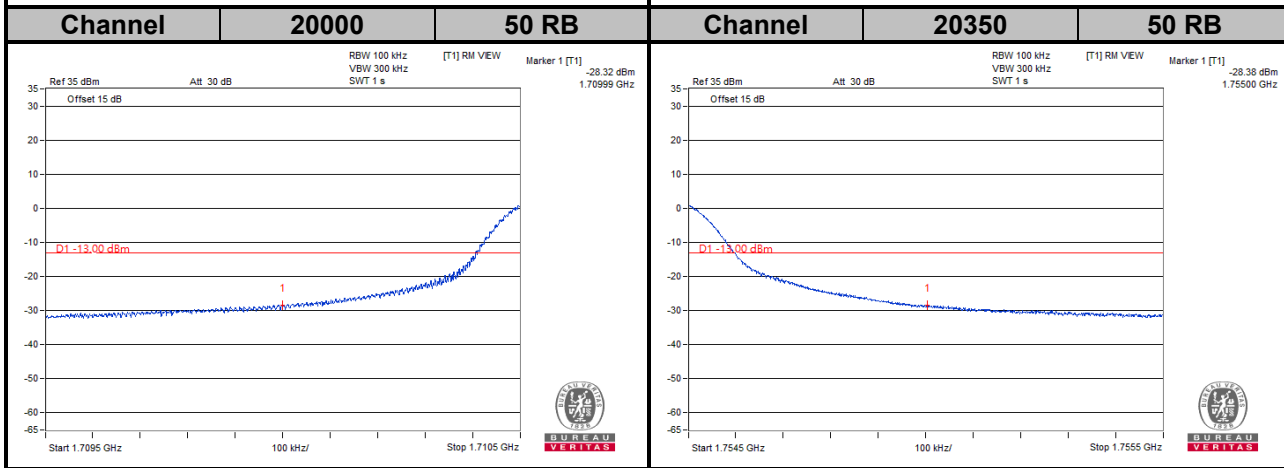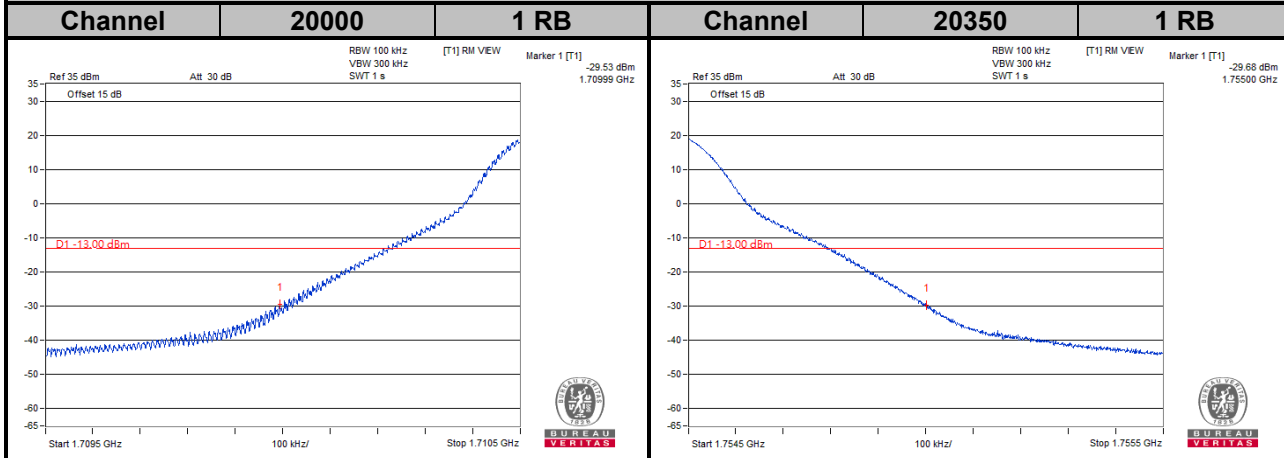



LTE Band 4


Channel Bandwidth: 15 MHz

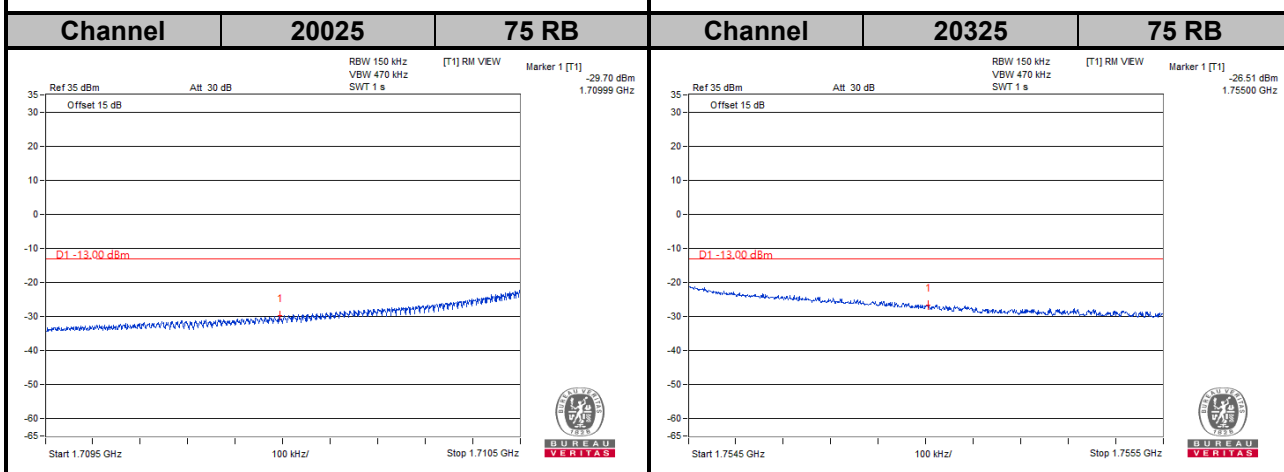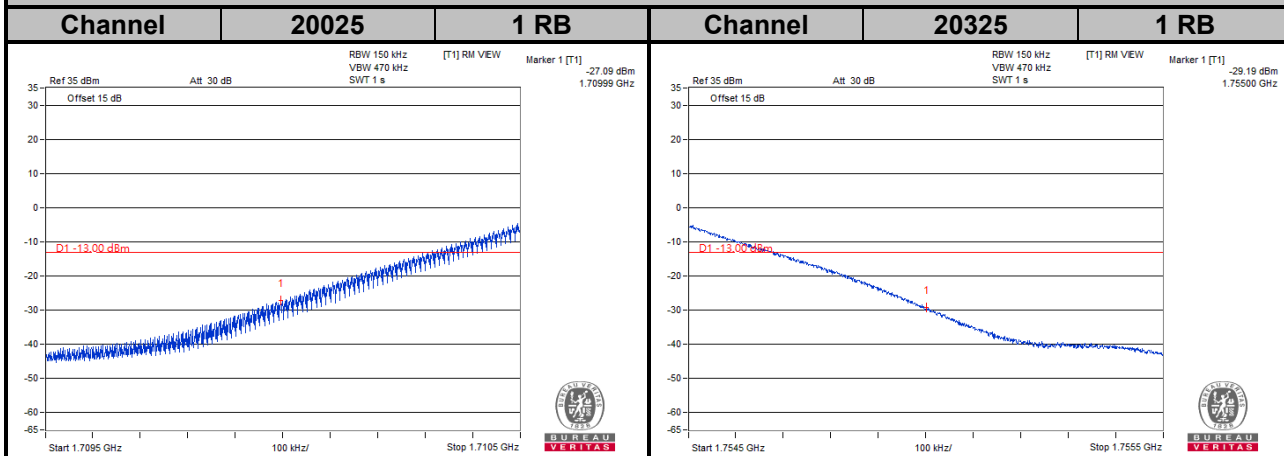


LTE Band 4

Channel Bandwidth: 20 MHz

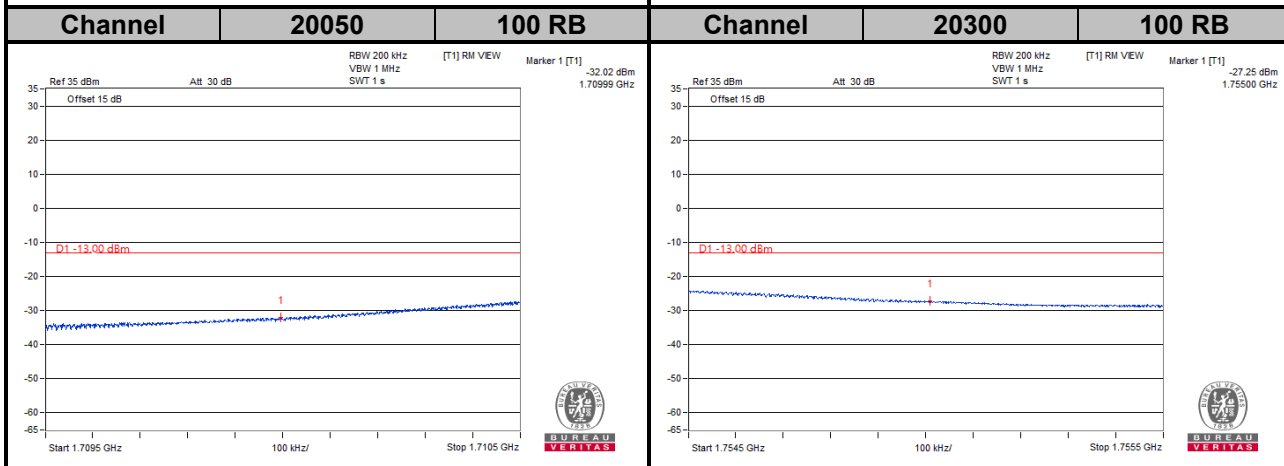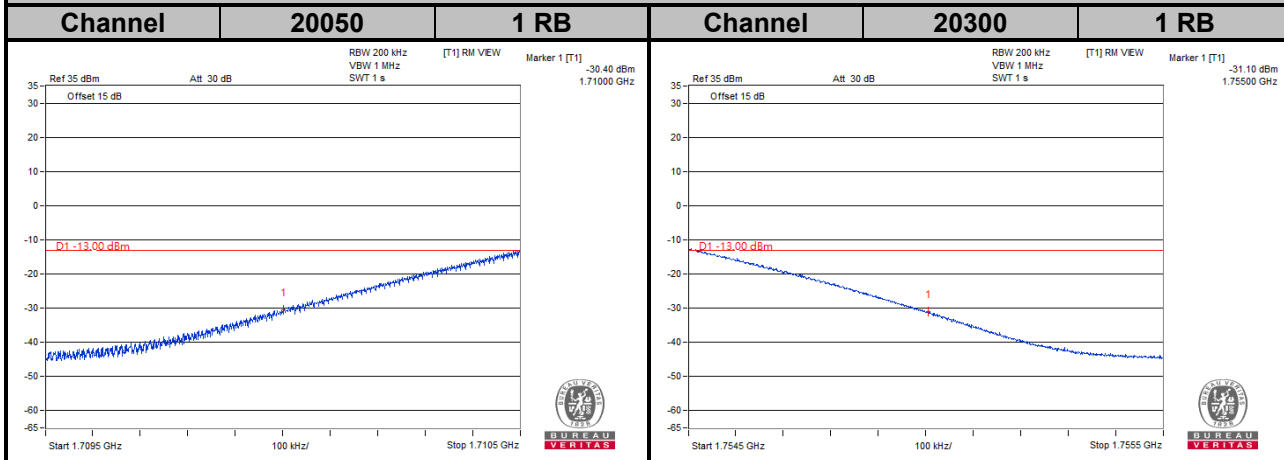


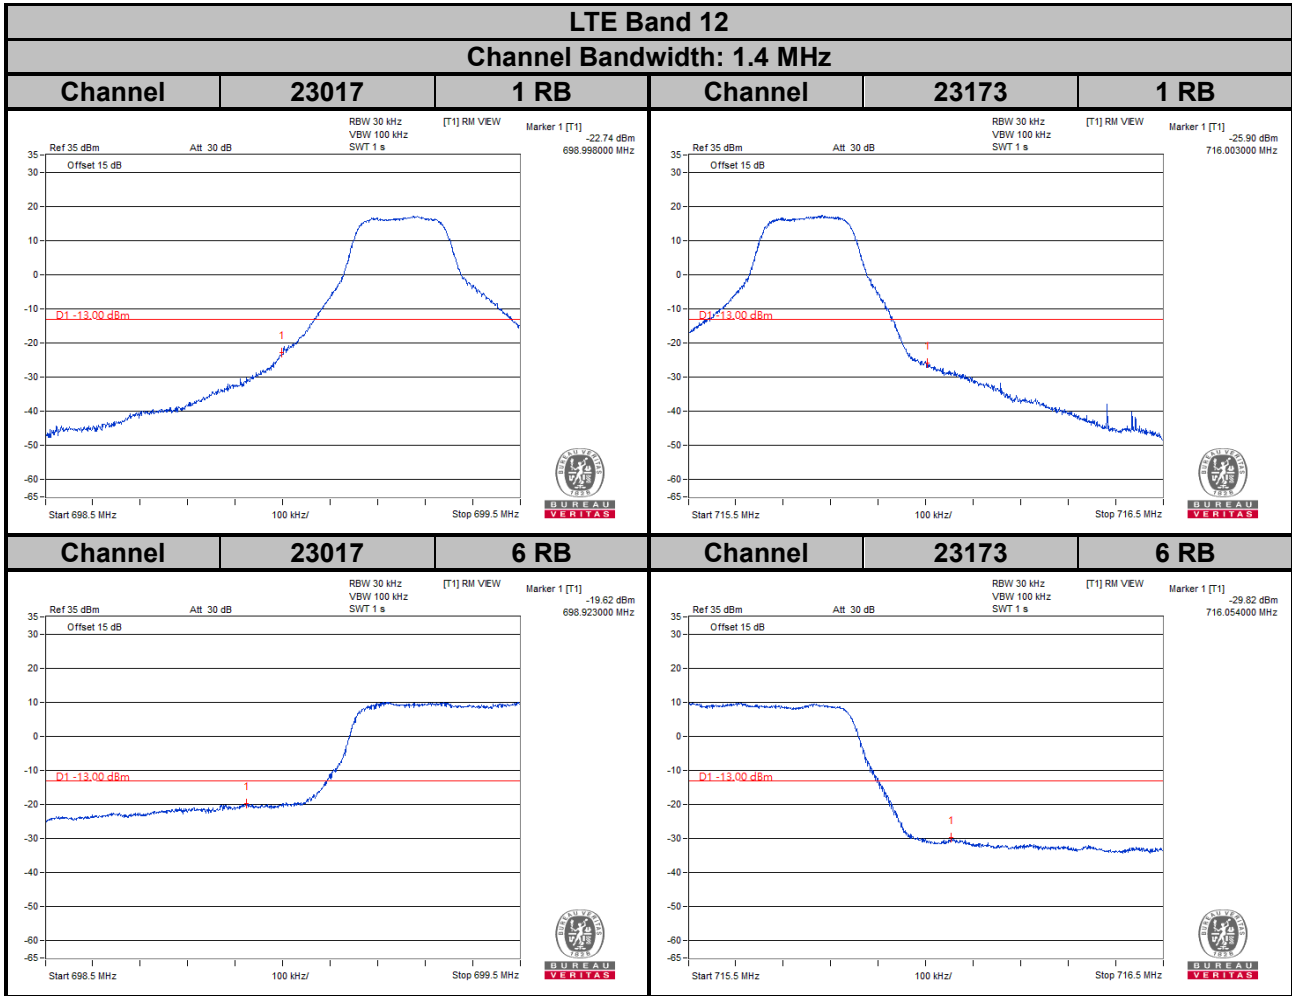


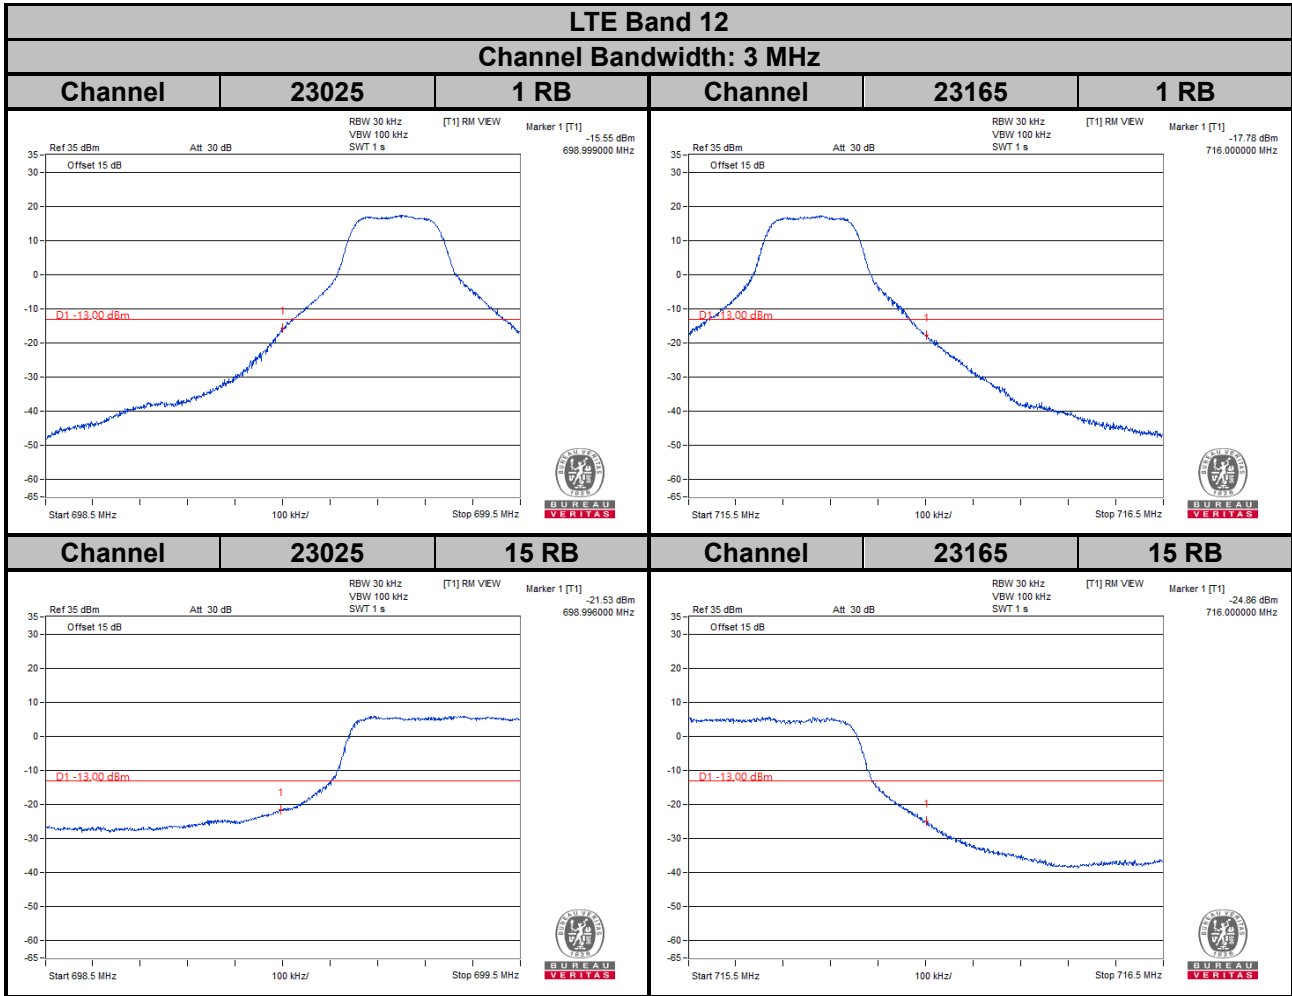





LTE Band 12


Channel Bandwidth: 5 MHz

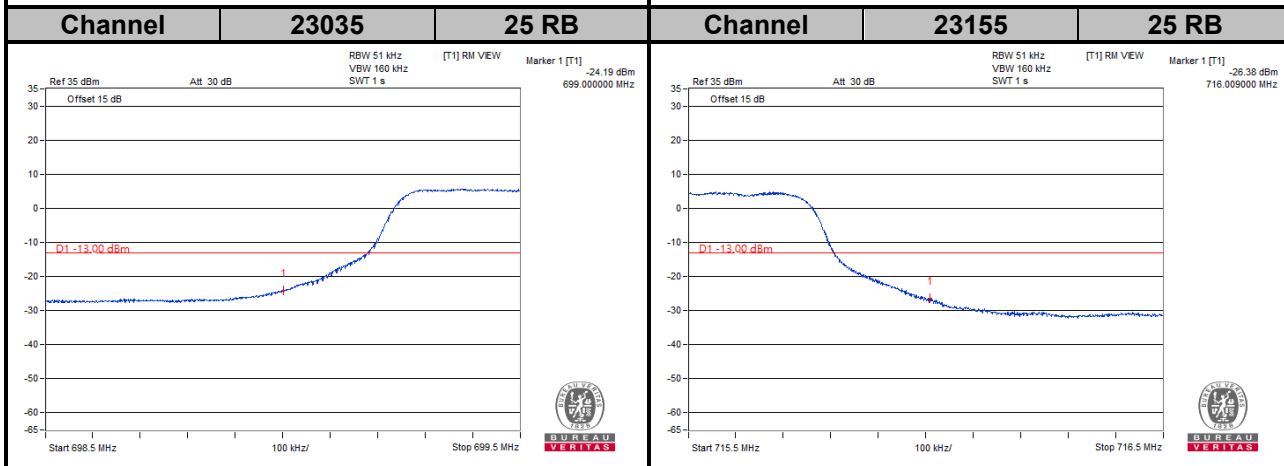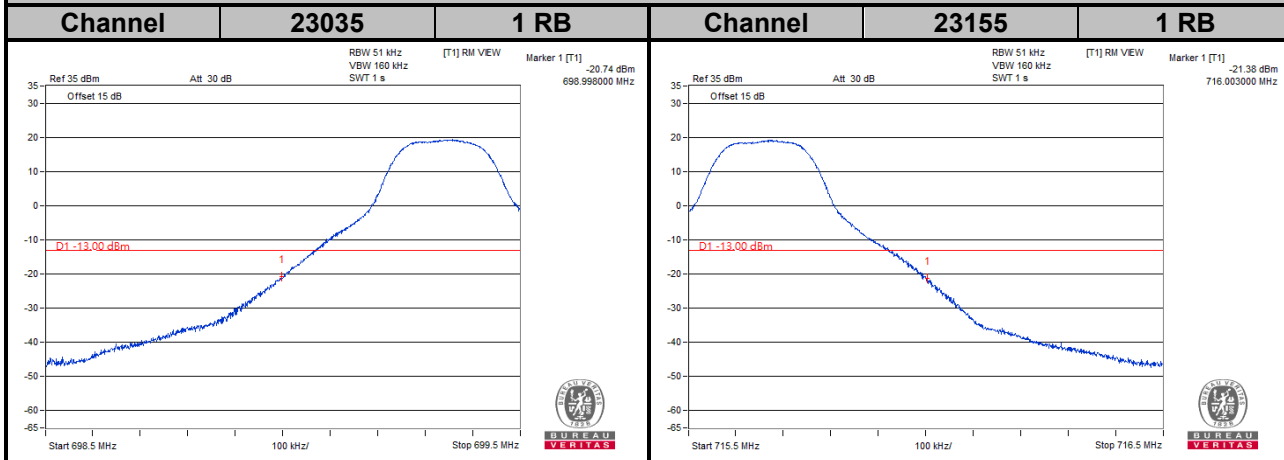

LTE Band 12



Channel Bandwidth: 10 MHz

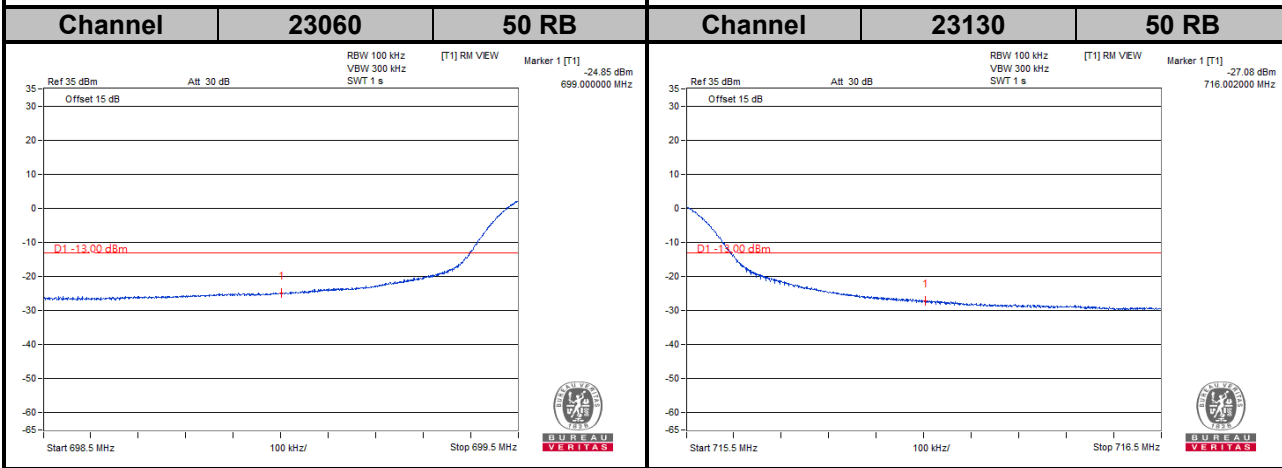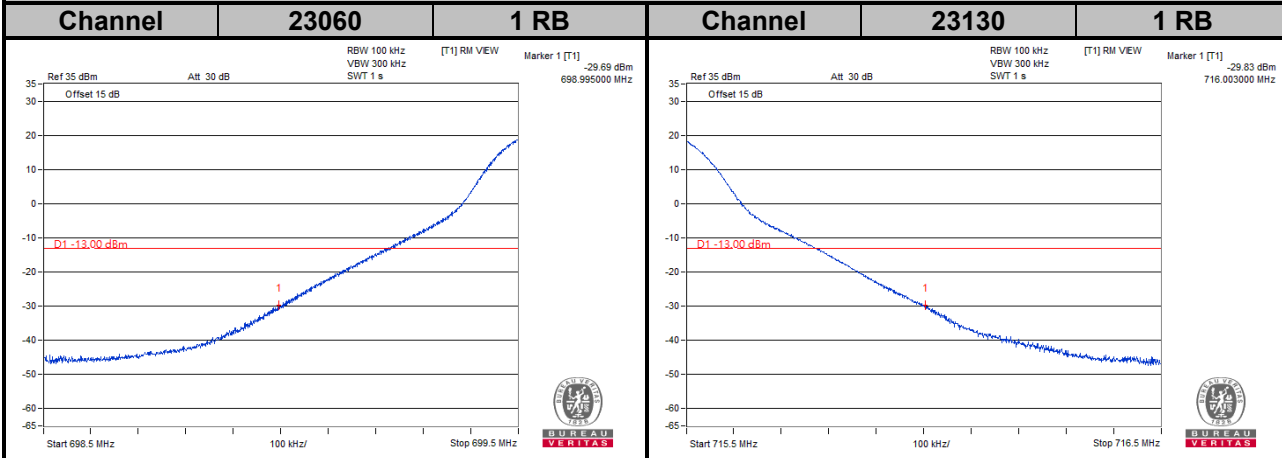

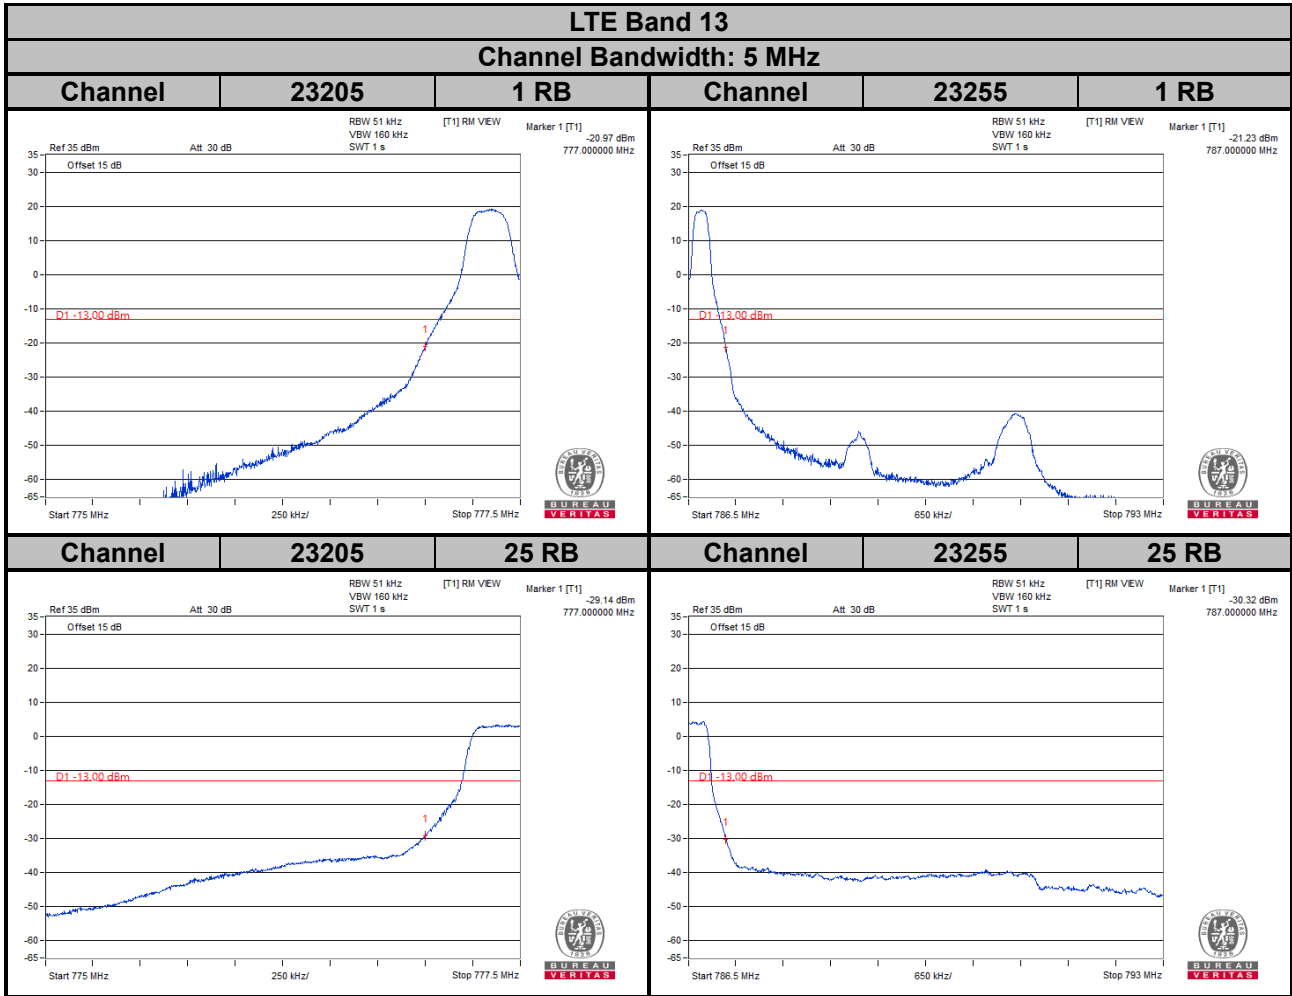



LTE Band 13


Channel Bandwidth: 10 MHz

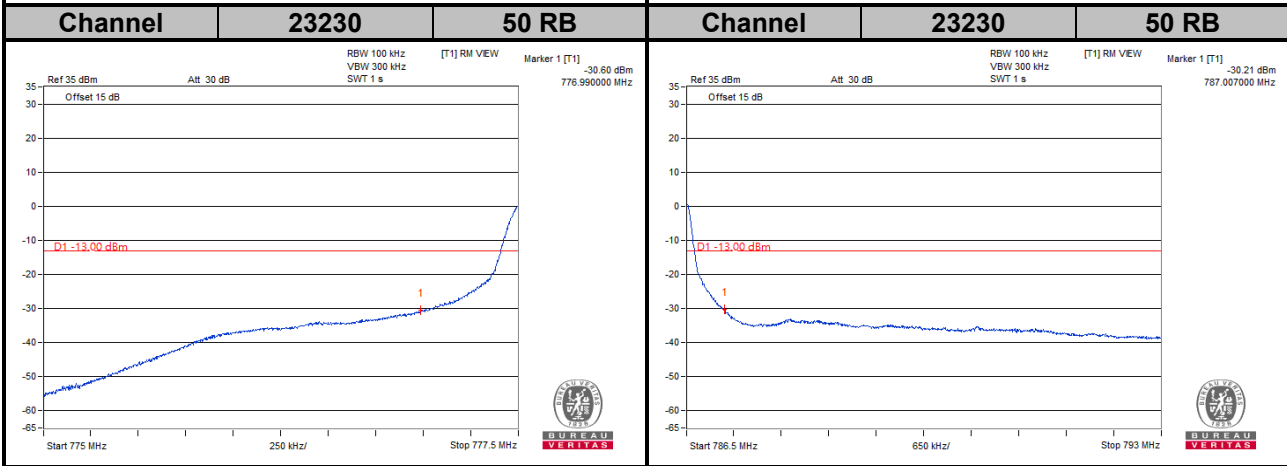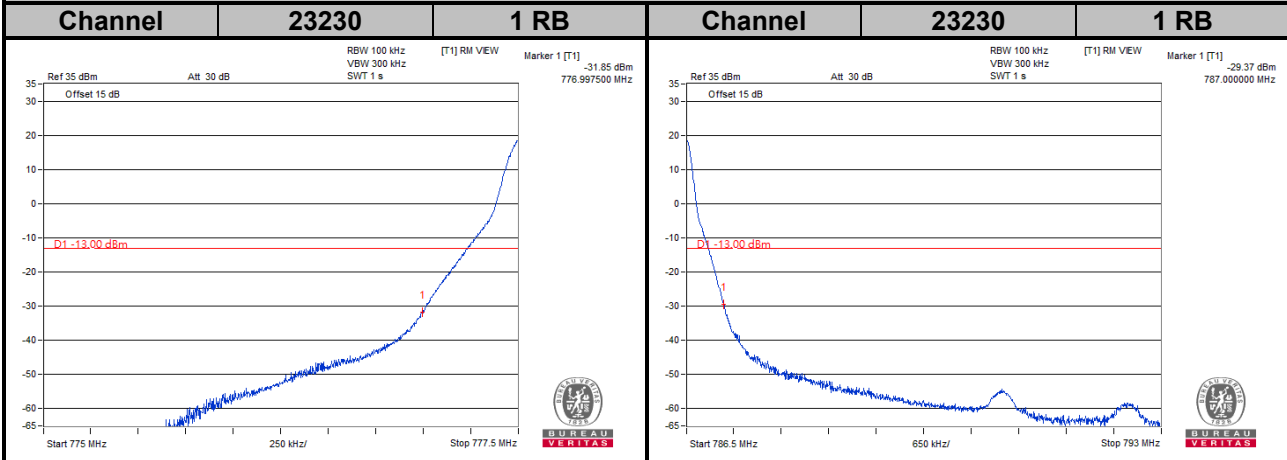

LTE Band 66



Channel Bandwidth: 1.4 MHz

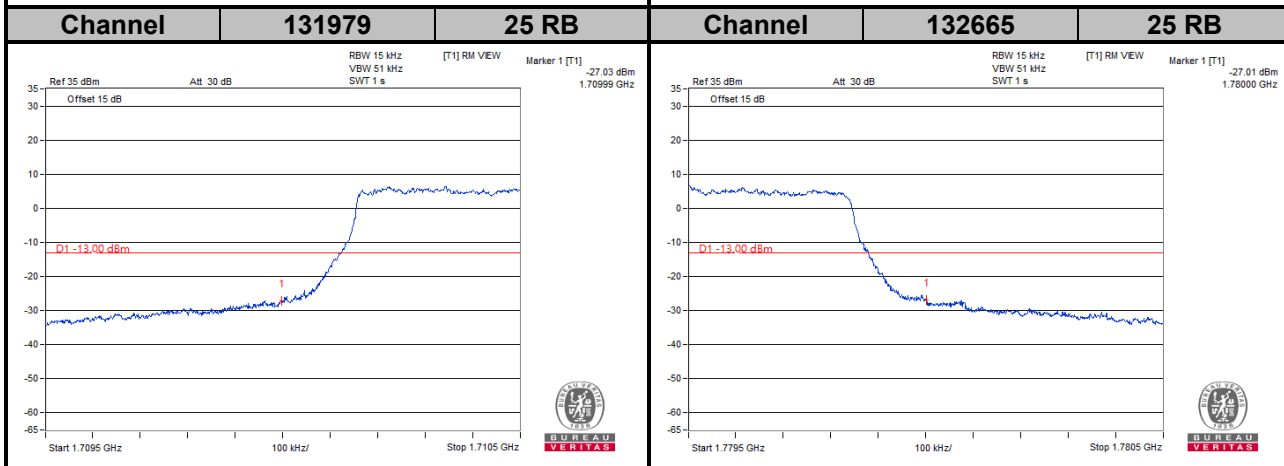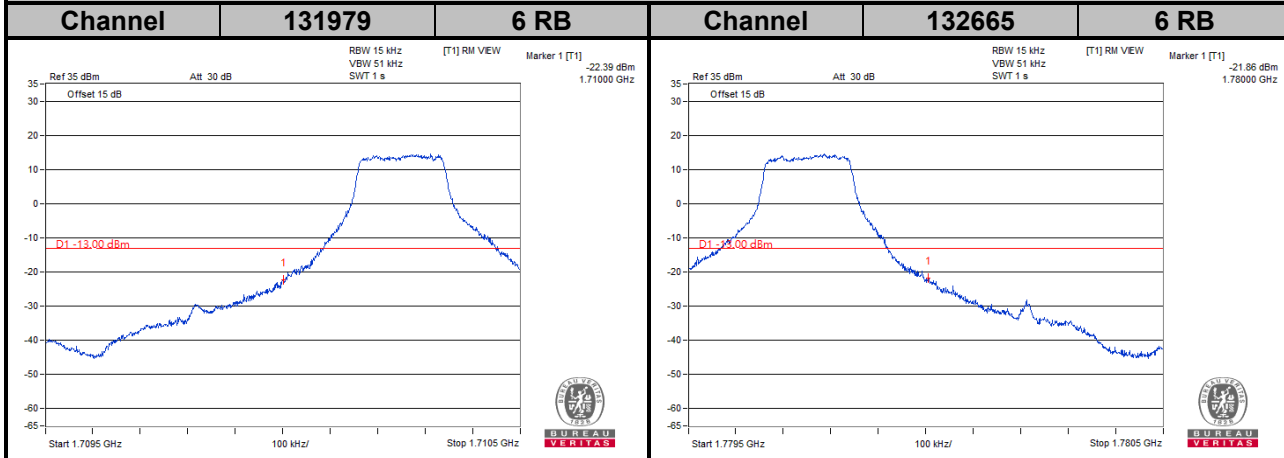

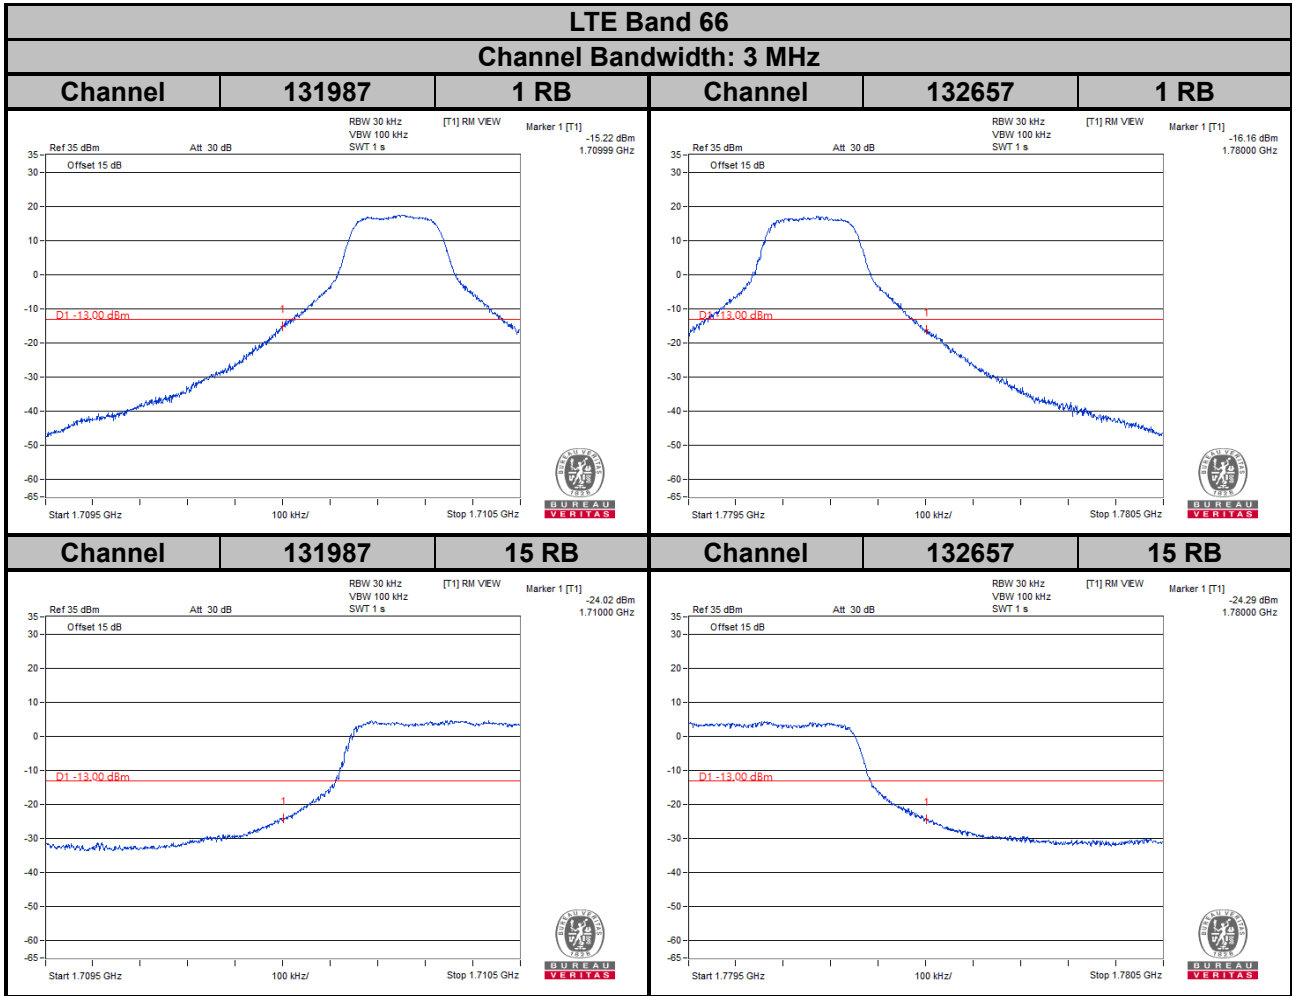



LTE Band 66

Channel Bandwidth: 5 MHz

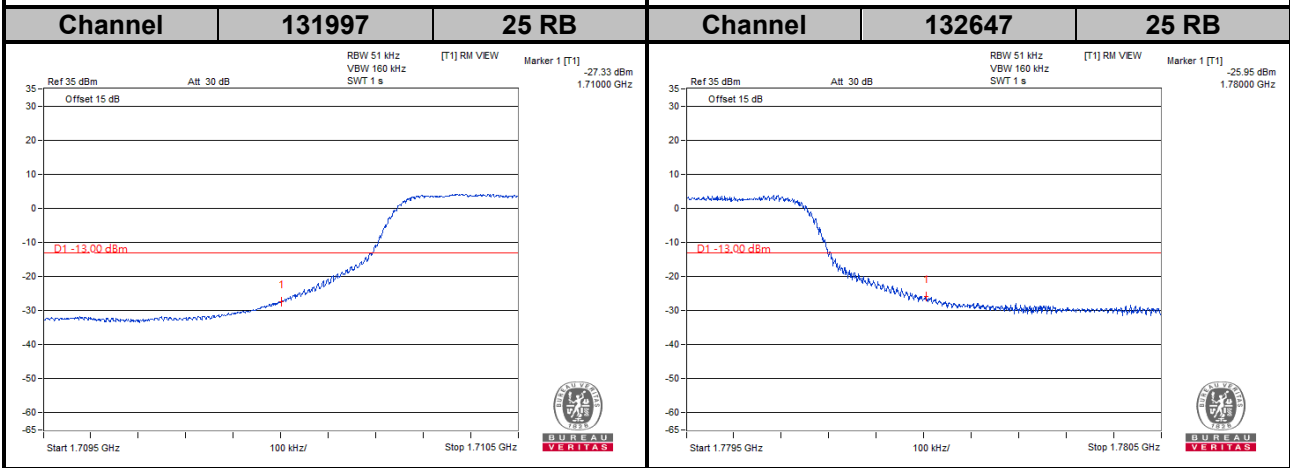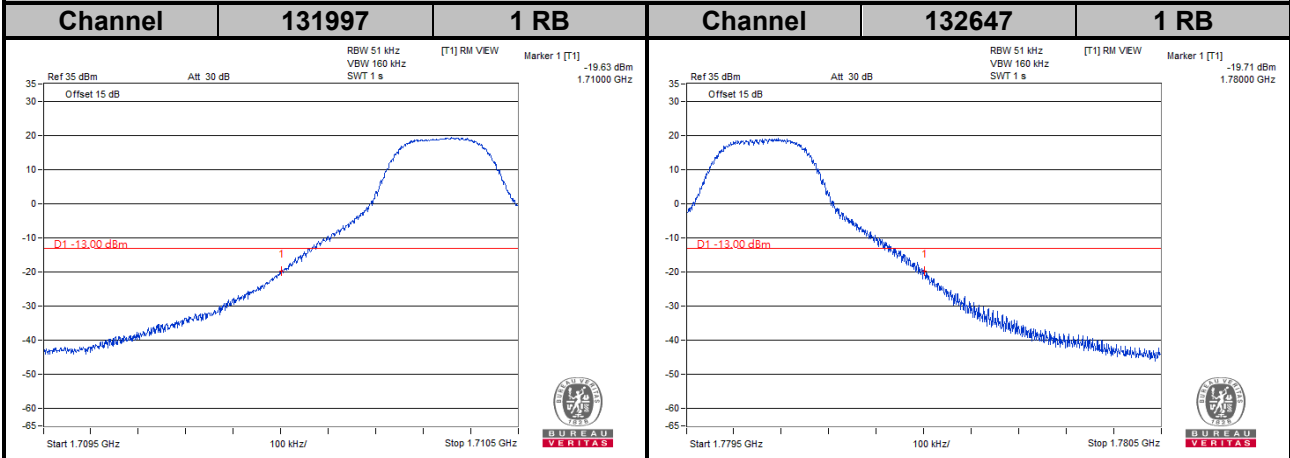


LTE Band 66



Channel Bandwidth: 10 MHz

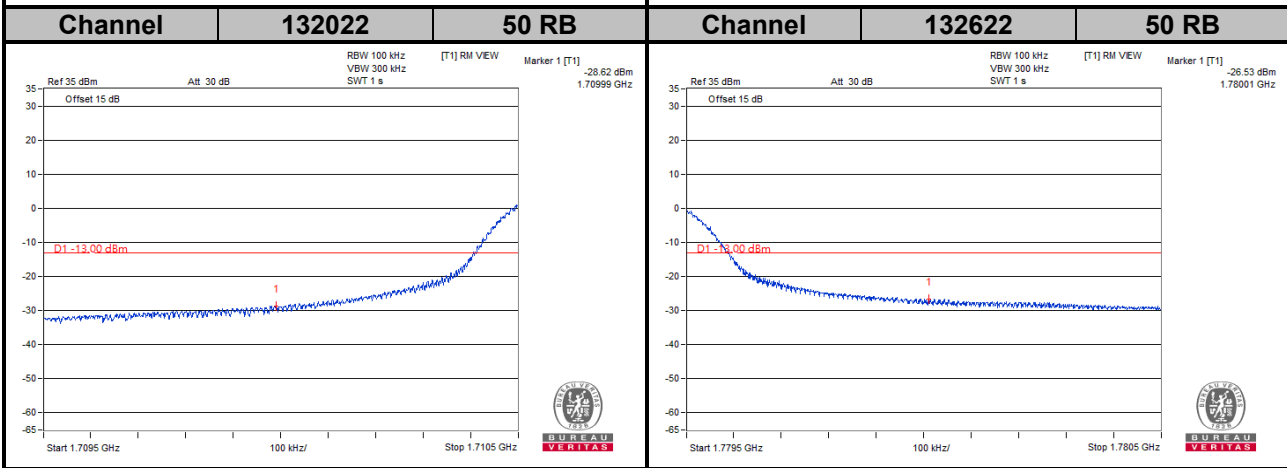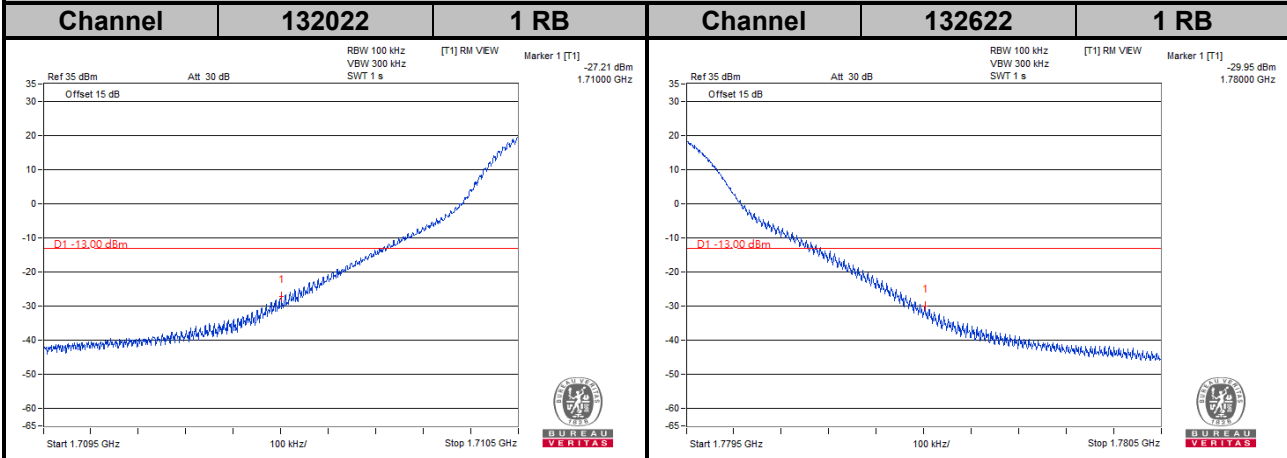




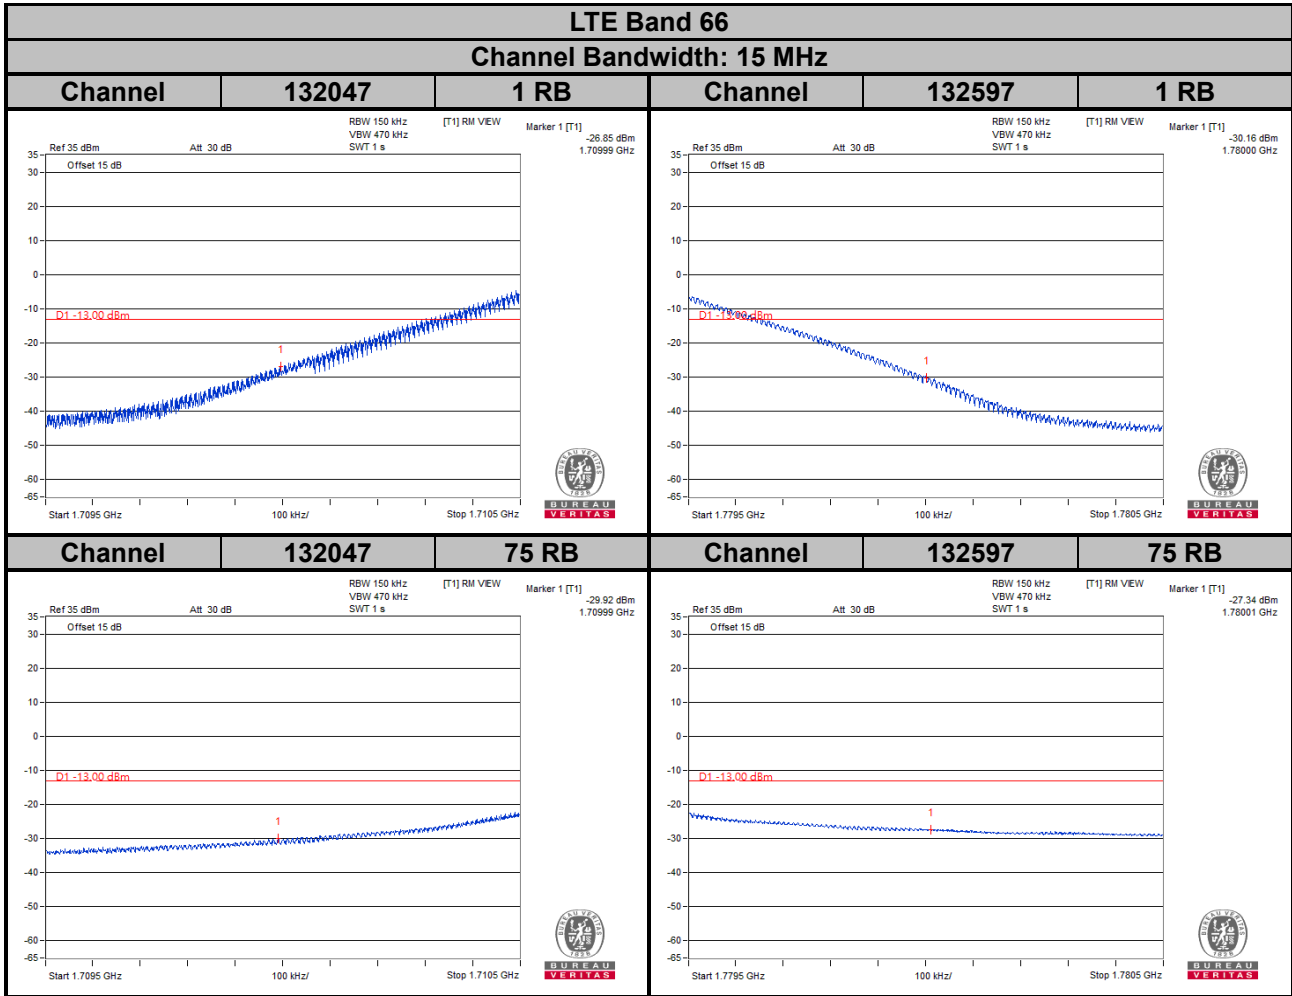


**LTE Band 66**  
**Channel Bandwidth: 20 MHz**

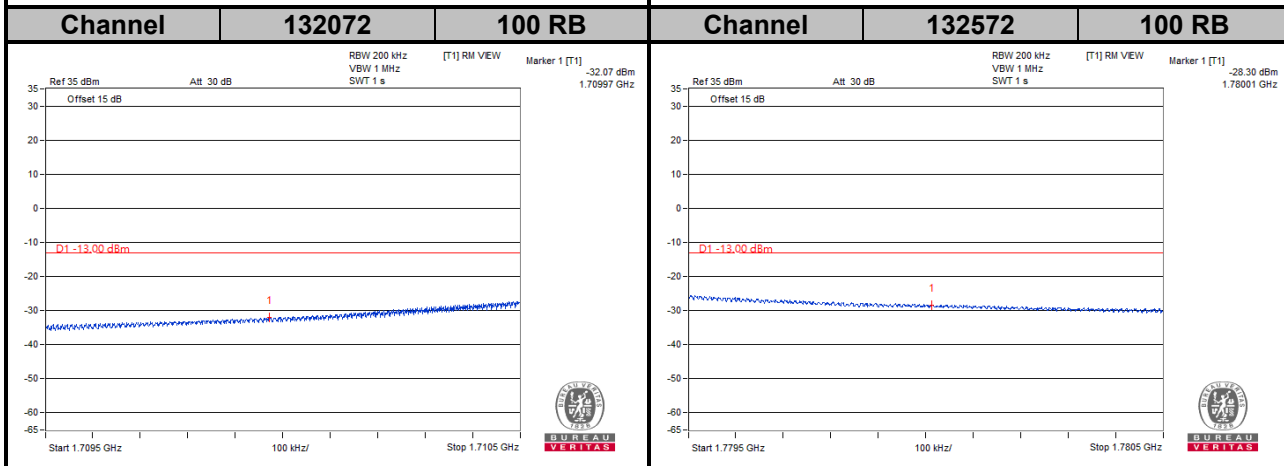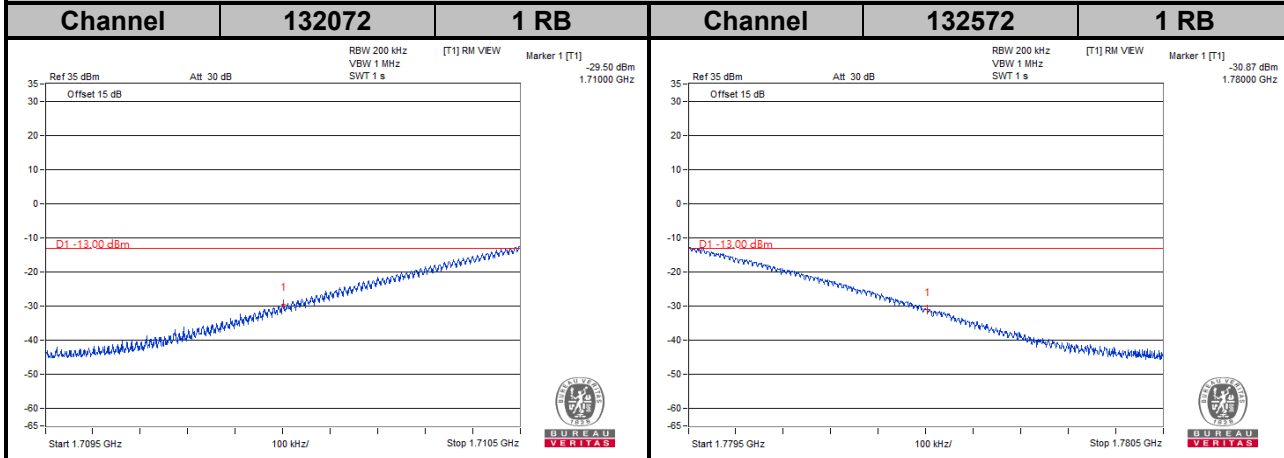

### Emission Mask

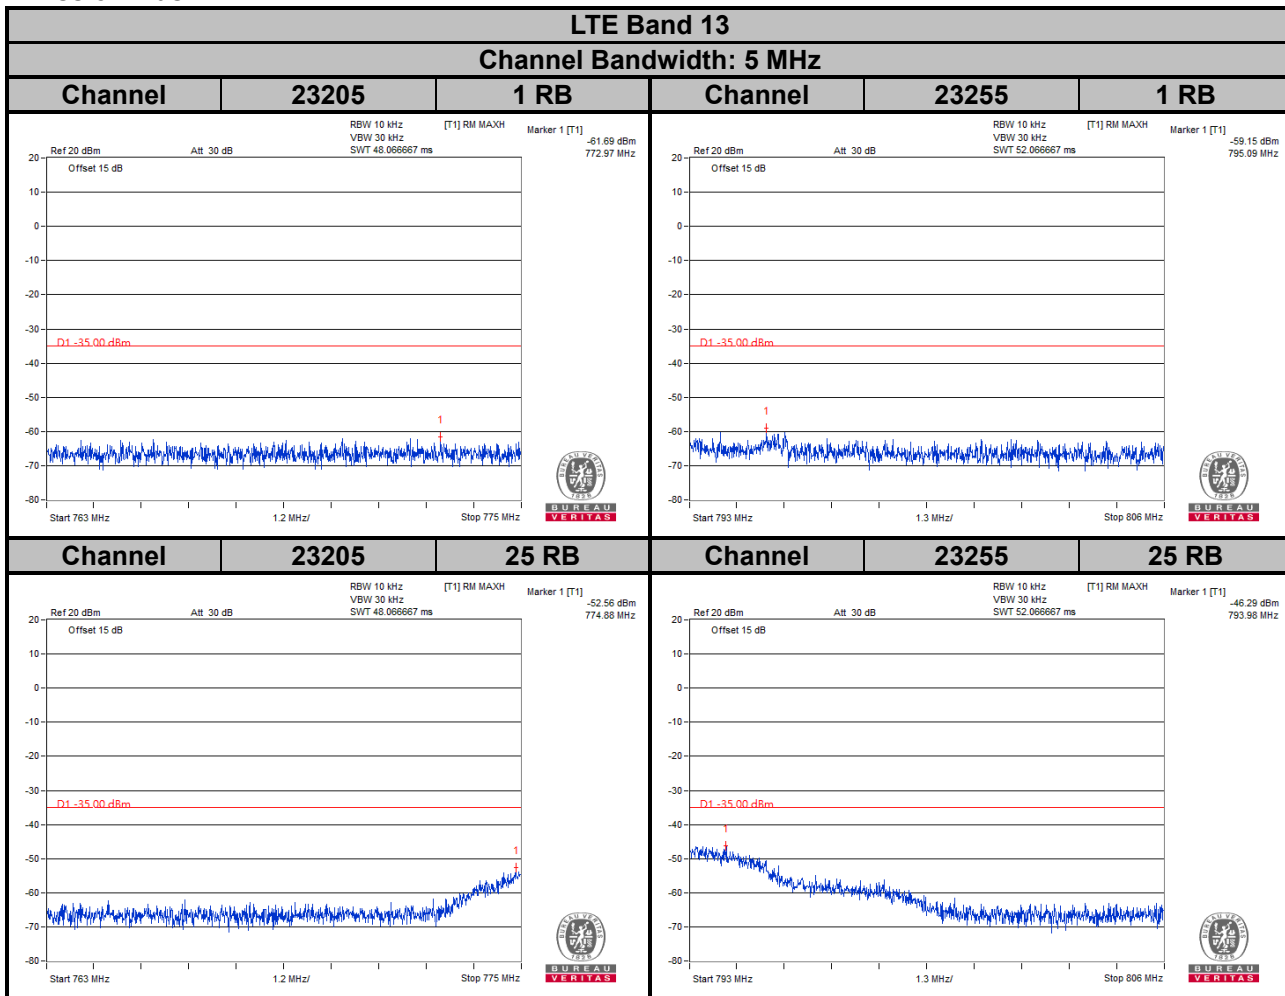

For the 763 - 775 MHz and 793 - 805 MHz band, the FCC limit is  $65 + 10 \log(P[\text{watt}])$  in a 6.25 kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

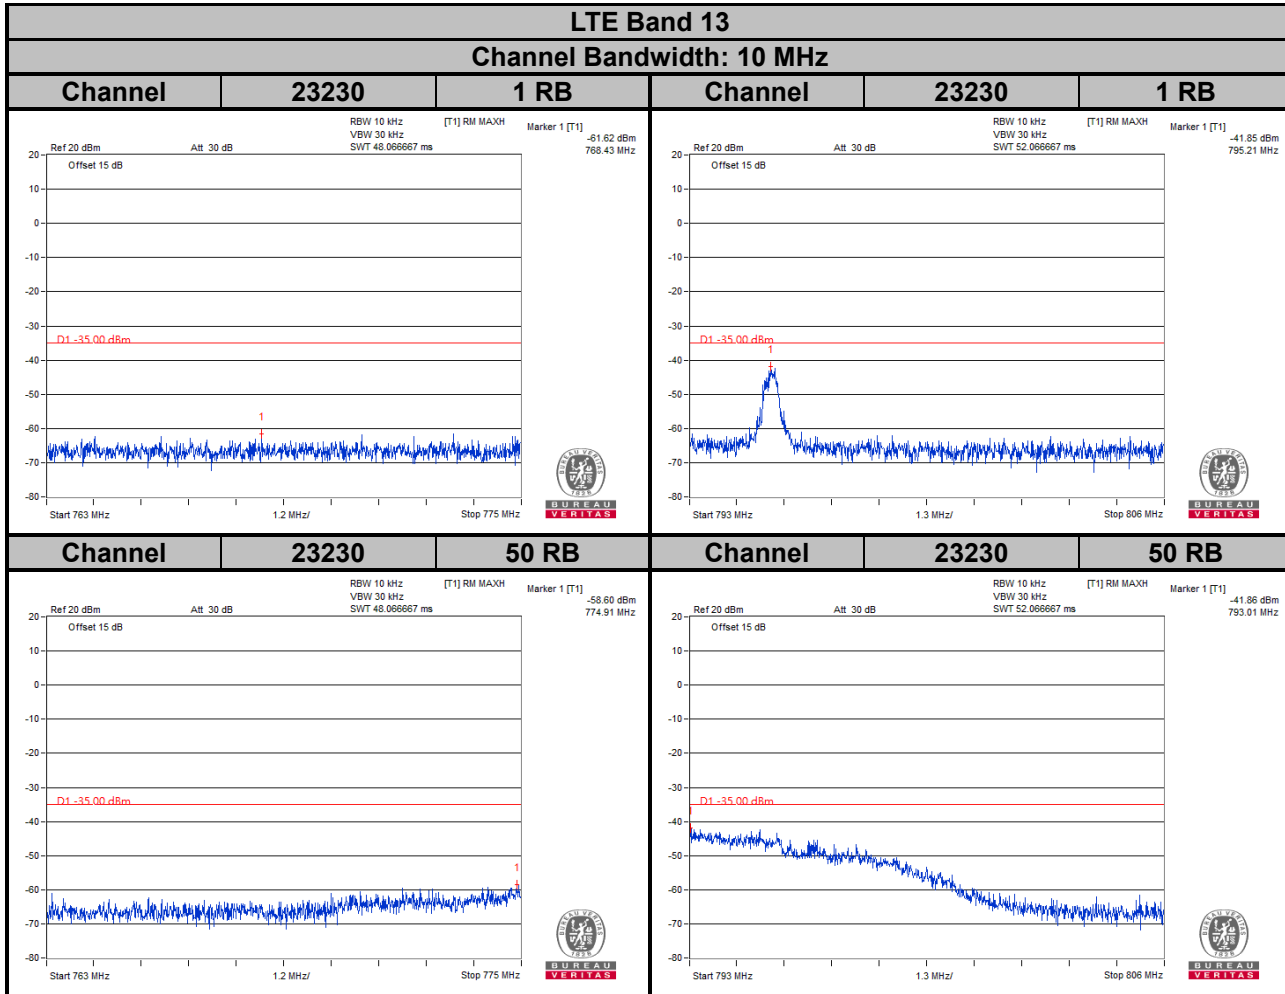


For the 763 - 775 MHz and 793 - 805 MHz band, the FCC limit is  $65 + 10 \log(P[\text{watt}])$  in a 6.25 kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

## 4.6 Peak to Average Ratio

### 4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 4.6.2 Test Setup

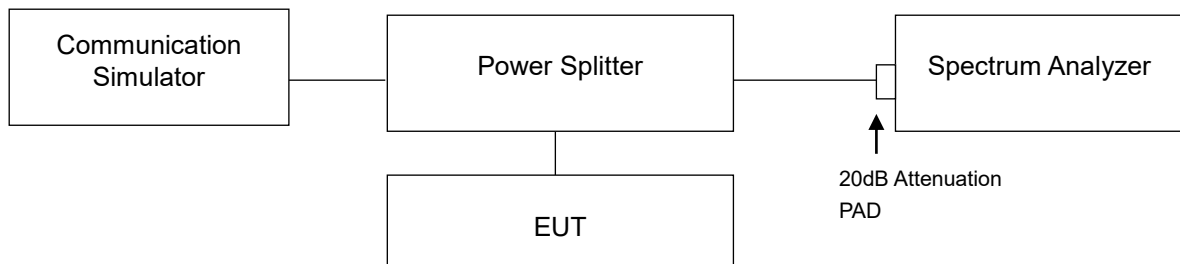


### 4.6.3 Test Procedures

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

#### 4.6.4 Test Results


WCDMA		
Channel	Frequency (MHz)	Peak to Average Ratio (dB)
1312	1712.4	2.83
1413	1732.6	2.57
1513	1752.6	2.89

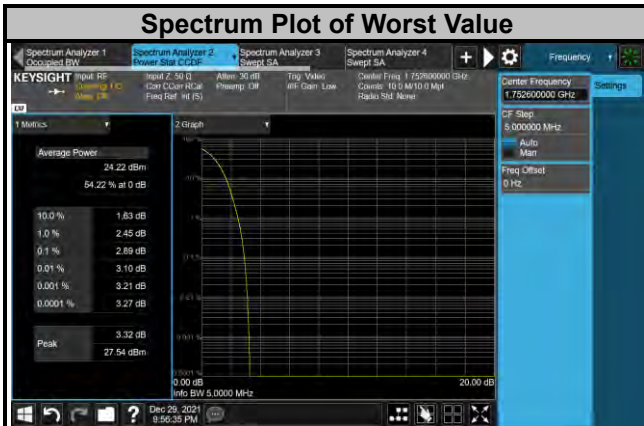


LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	3.34	3.96	19965	1711.5	3.19	3.82
20175	1732.5	3.37	4.11	20175	1732.5	3.17	3.96
20393	1754.3	3.67	4.47	20385	1753.5	3.30	4.11



LTE Band 4							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	3.07	3.89	20000	1715.0	2.96	3.80
20175	1732.5	3.16	3.96	20175	1732.5	3.22	4.01
20375	1752.5	3.26	4.05	20350	1750.0	3.07	3.92

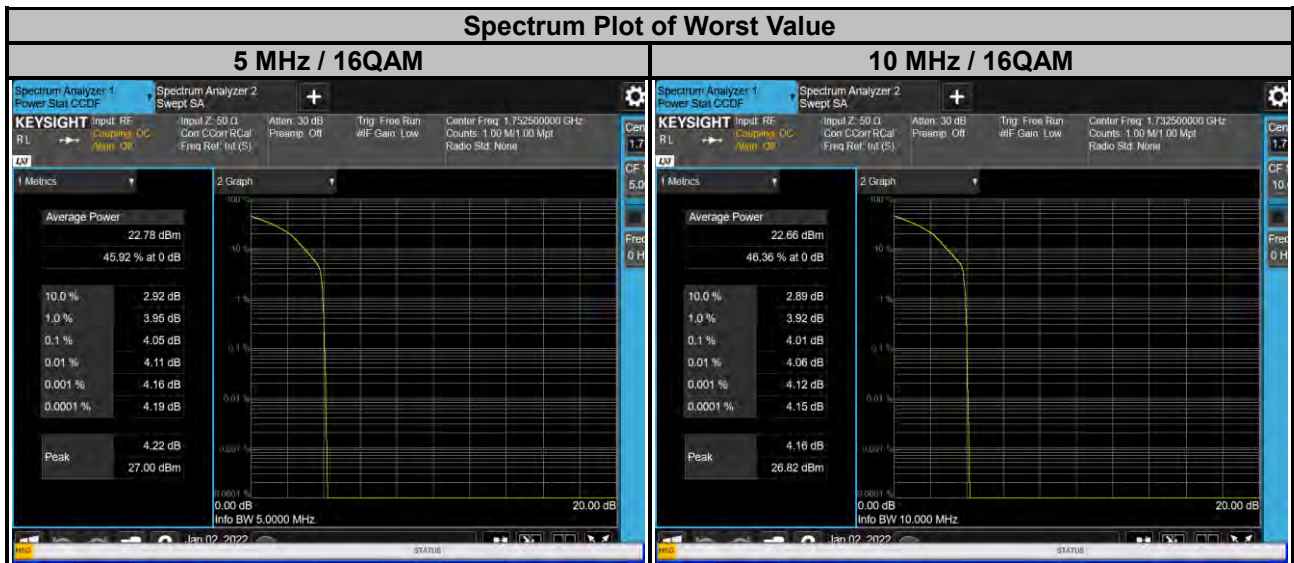

LTE Band 4							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	2.93	3.64	20050	1720.0	3.25	3.93
20175	1732.5	3.43	4.16	20175	1732.5	3.46	4.21
20325	1747.5	2.76	3.54	20300	1745.0	3.00	3.88

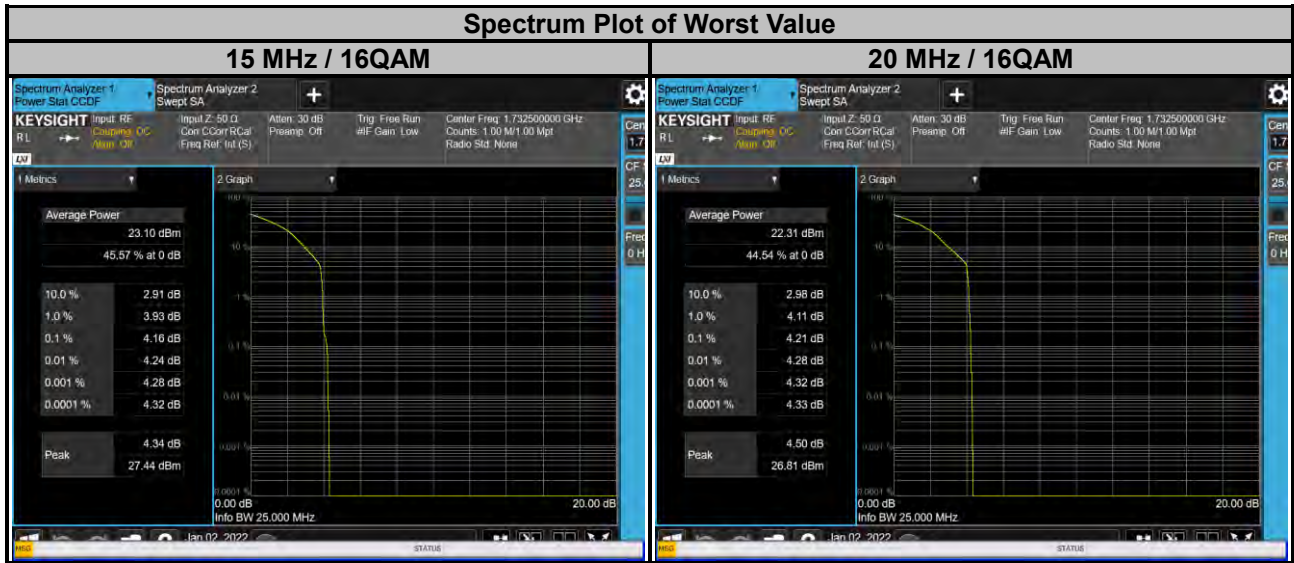





LTE Band 12							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	3.14	3.49	23025	700.5	2.96	3.32
23095	707.5	3.86	4.47	23095	707.5	3.74	4.42
23173	715.3	3.86	4.28	23165	714.5	3.47	4.02



LTE Band 12							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	2.92	3.37	23060	704.0	2.92	3.35
23095	707.5	3.76	4.38	23095	707.5	3.61	4.19
23155	713.5	3.15	3.67	23130	711.0	3.59	4.29

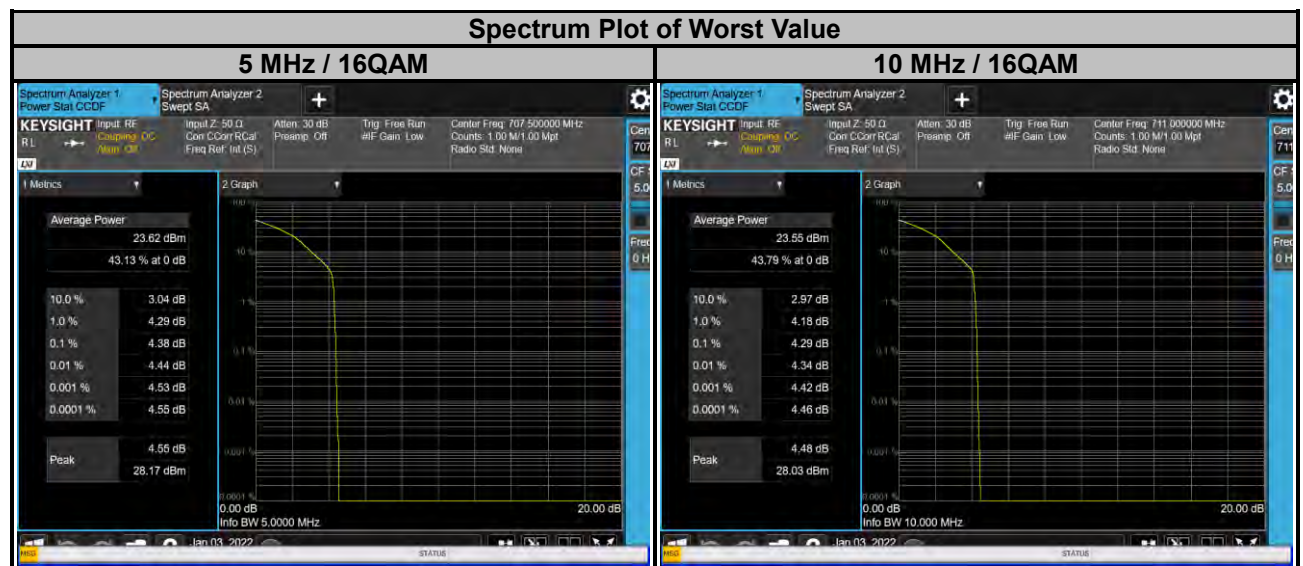

LTE Band 13							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23205	779.5	3.27	4.04	23230	782.0	3.28	4.05
23230	782.0	3.31	4.00				
23255	784.5	3.39	4.15				

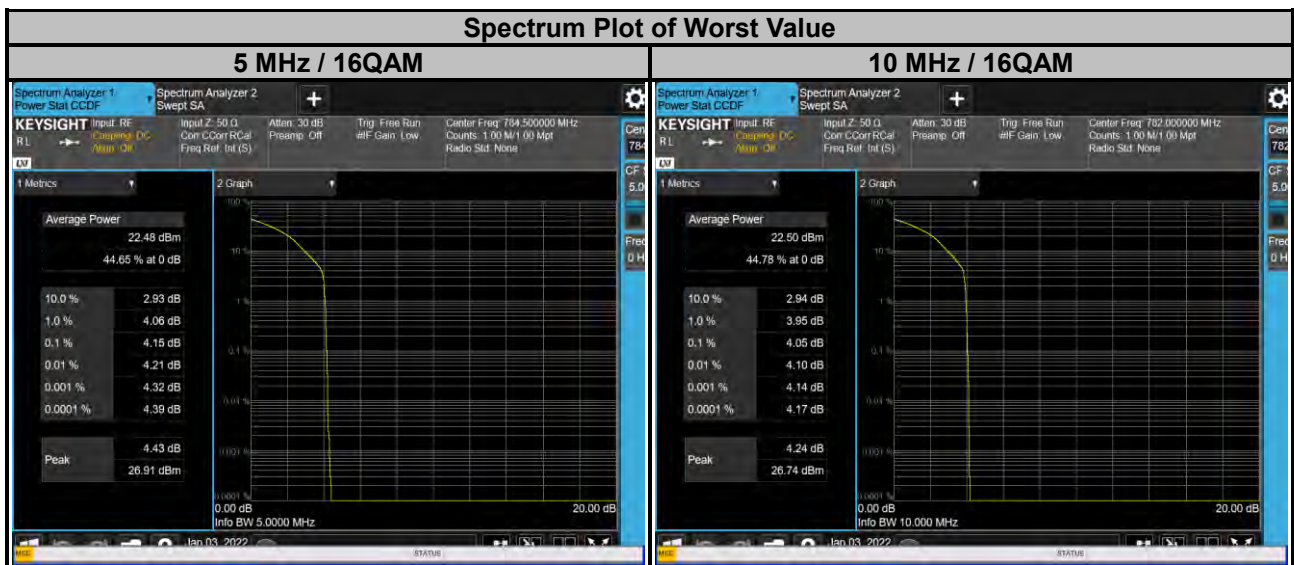

LTE Band 66							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
131979	1710.7	3.68	4.39	131987	1711.5	3.49	4.27
132322	1745.0	3.85	4.57	132322	1745.0	3.68	4.44
132665	1779.3	3.83	4.60	132657	1778.5	3.61	4.49




LTE Band 66							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
131997	1712.5	3.34	4.28	132022	1715.0	3.23	4.15
132322	1745.0	3.50	4.33	132322	1745.0	3.26	4.09
132647	1777.5	3.47	4.38	132622	1775.0	3.47	4.33



### LTE Band 66

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
132047	1717.5	3.28	3.95	132072	1720.0	3.59	4.31
132322	1745.0	3.29	3.90	132322	1745.0	3.56	4.31
132597	1772.5	3.74	4.62	132572	1770.0	4.19	5.01

### Spectrum Plot of Worst Value

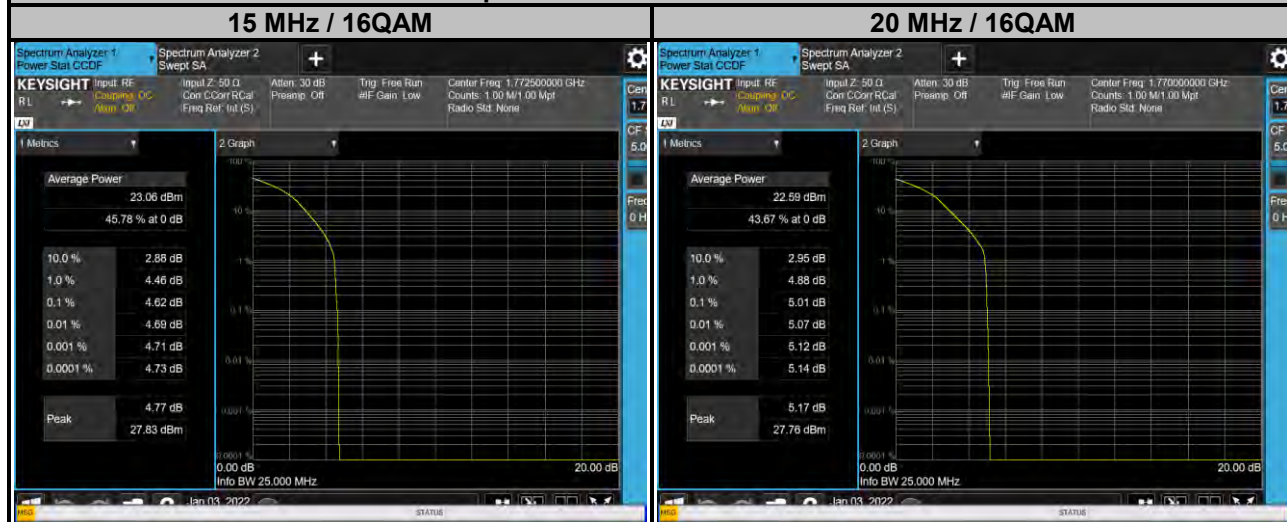



## 4.7 Conducted Spurious Emissions

### 4.7.1 Limits of Conducted Spurious Emissions Measurement

For WCDMA band 4, LTE Band 4, 66:

According to FCC 27.53(h), for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log (P)$  dB.

For LTE Band 12:


According to FCC 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. The limit of emissions is equal to -13 dBm.

For LTE Band 13:

According to FCC 27.53(c)(2), for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit of emissions is equal to -13 dBm.

According to FCC 27.53(f), for operations in the 775-788 MHz, emissions in the band 1559-1610MHz shall be limited to -70 dBW/MHz (EIRP). The limit of emissions is equal to -40 dBm.


### 4.7.2 Test Setup

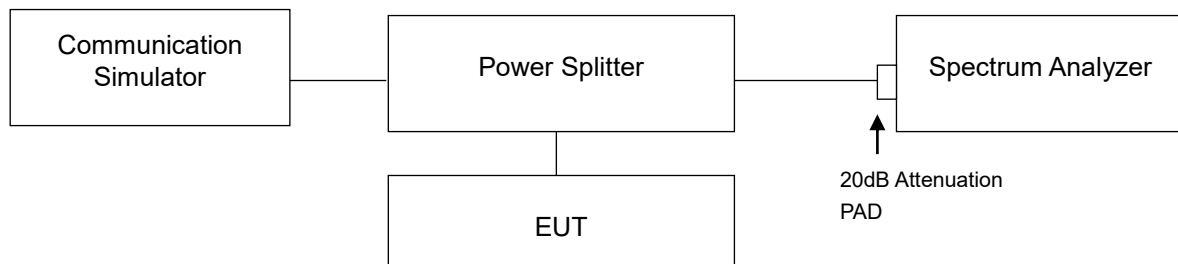

### 4.7.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for LTE Band 12 and Band 13 conducted emission measurement.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for WCDMA, LTE Band 4 and Band 66 conducted emission measurement.
- Measuring frequency range is from 1 GHz to 8 GHz / 18 GHz / 20 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

#### 4.7.4 Test Results

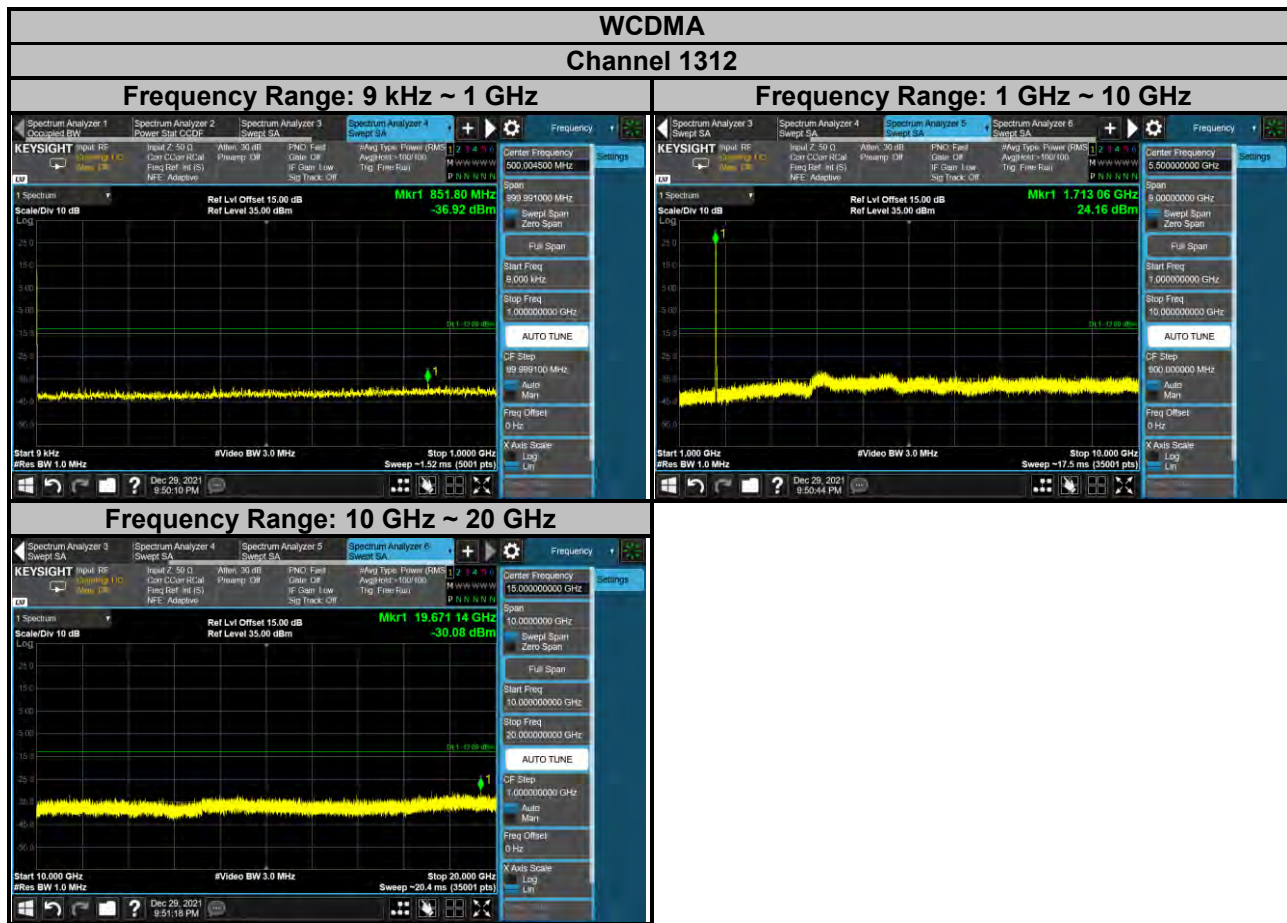


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



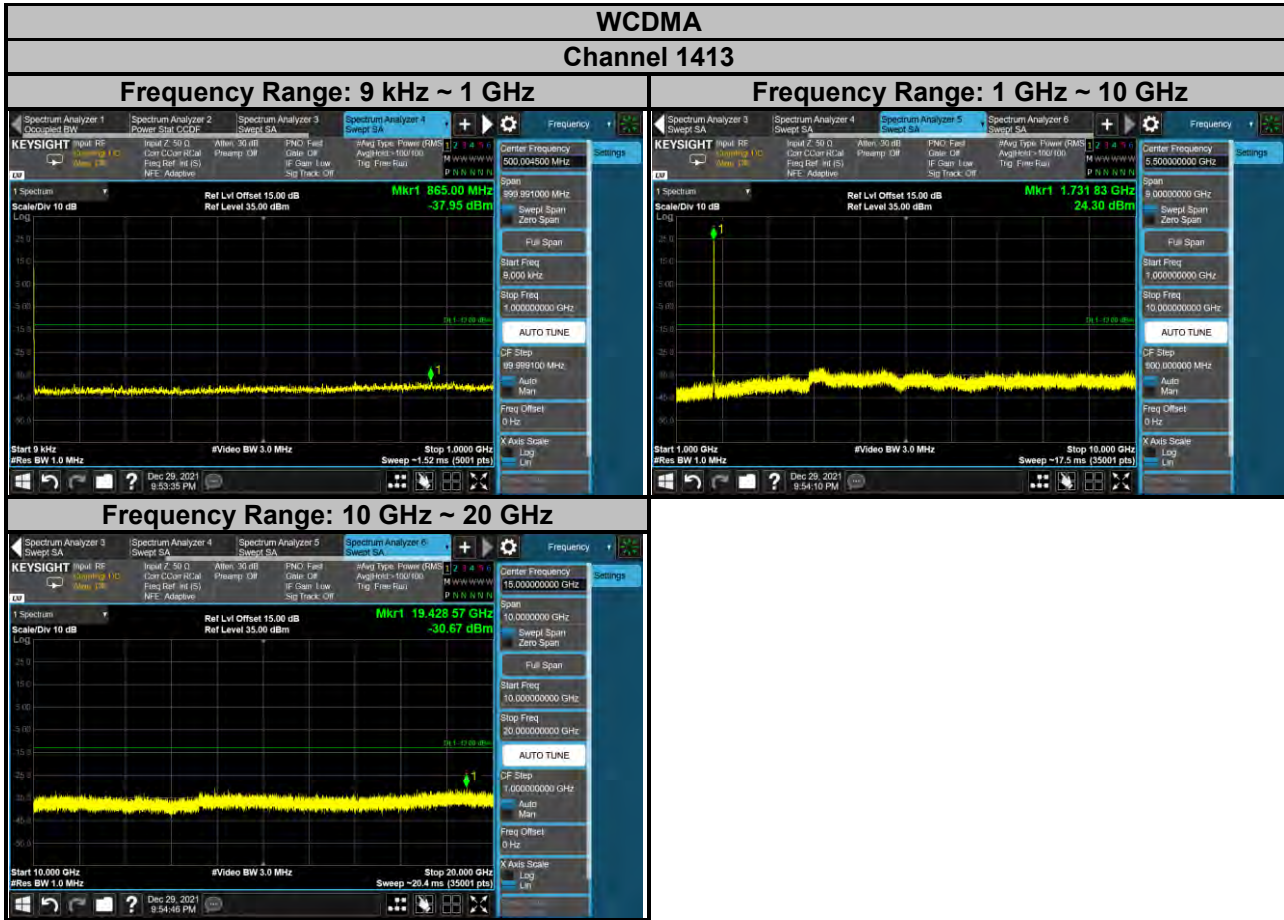


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

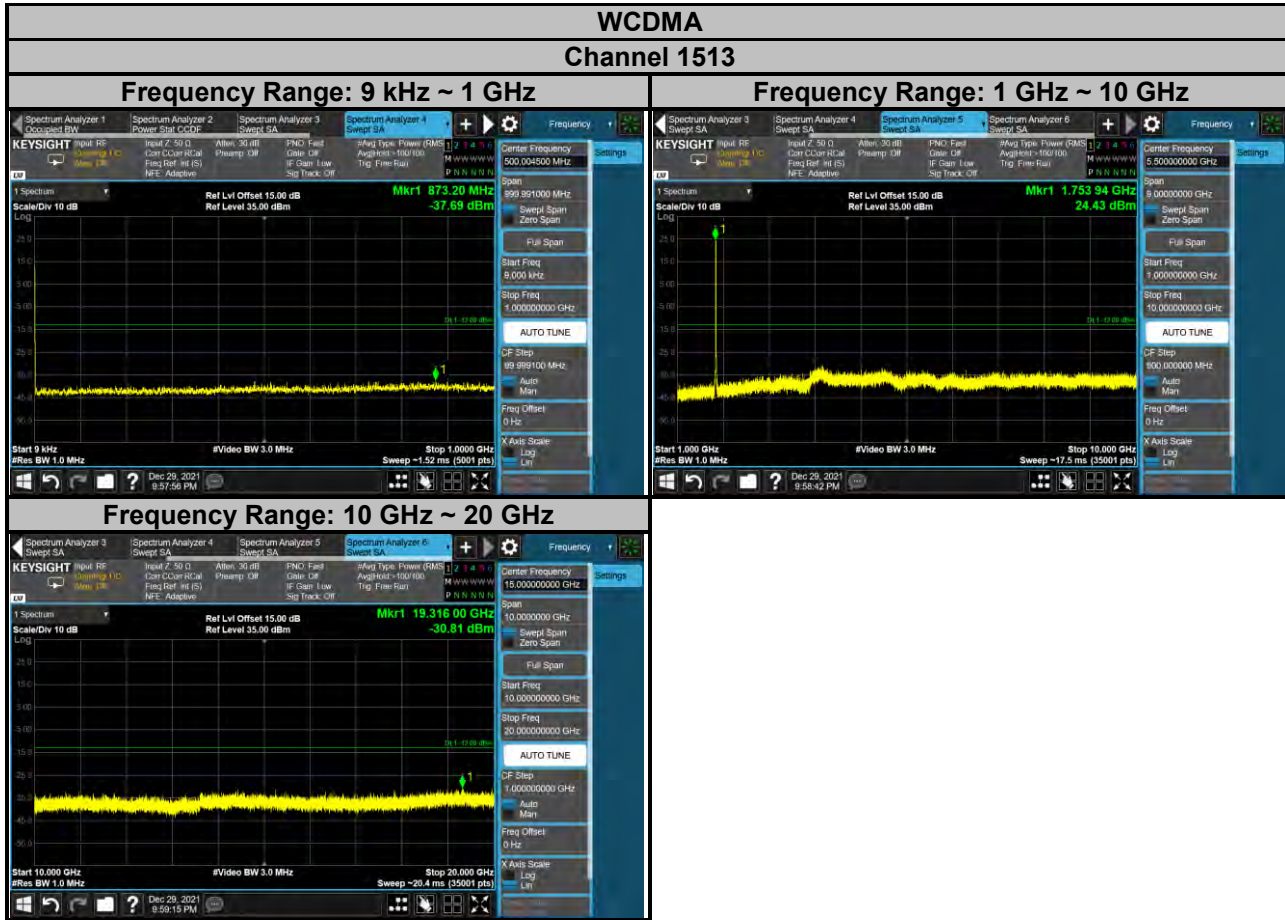


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


**LTE Band 4**  
**Channel Bandwidth: 1.4 MHz**  
**Channel 19957**

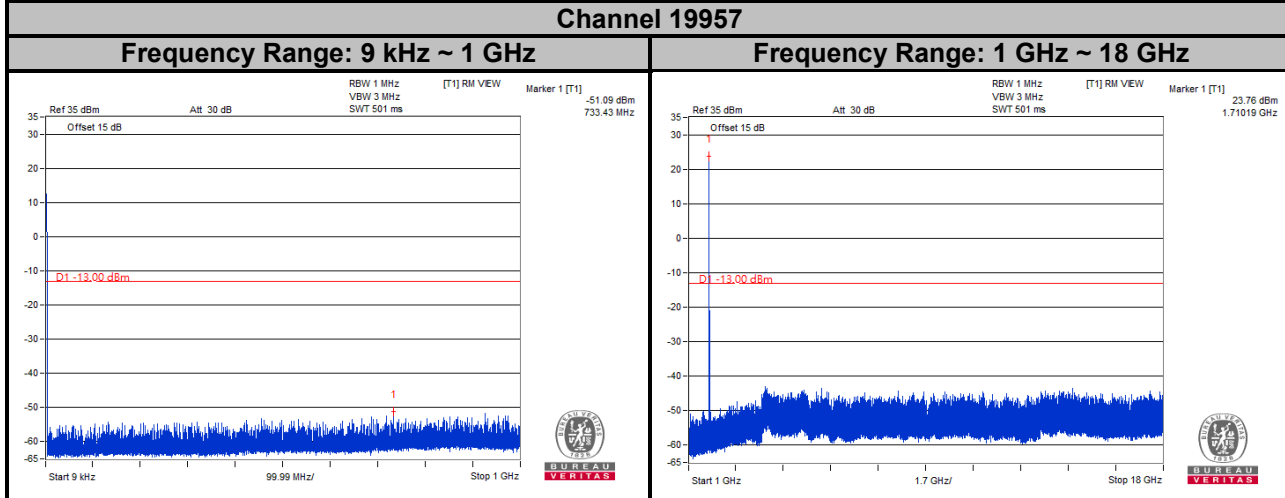

**Channel 20175**

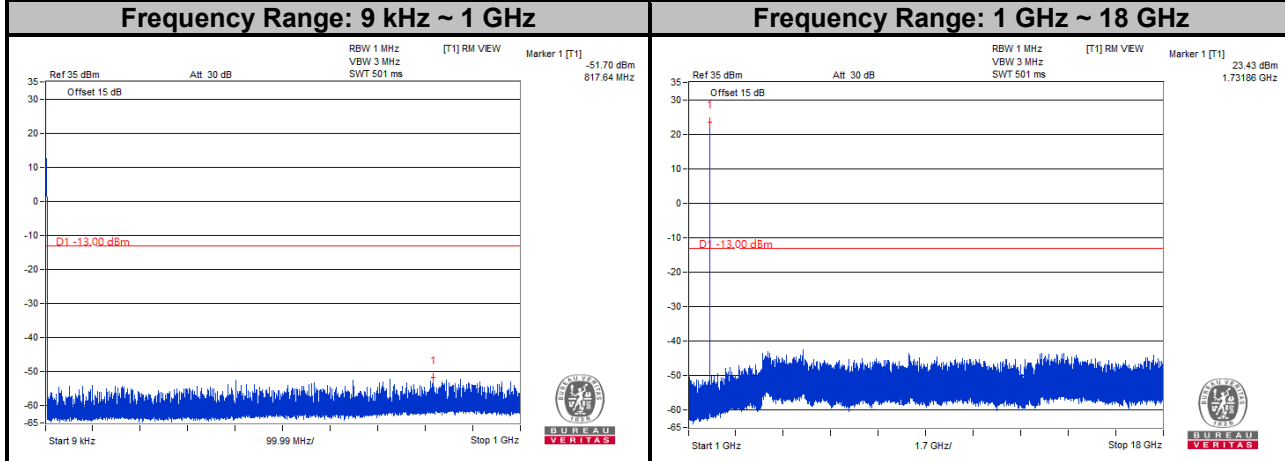


**Channel 20393**

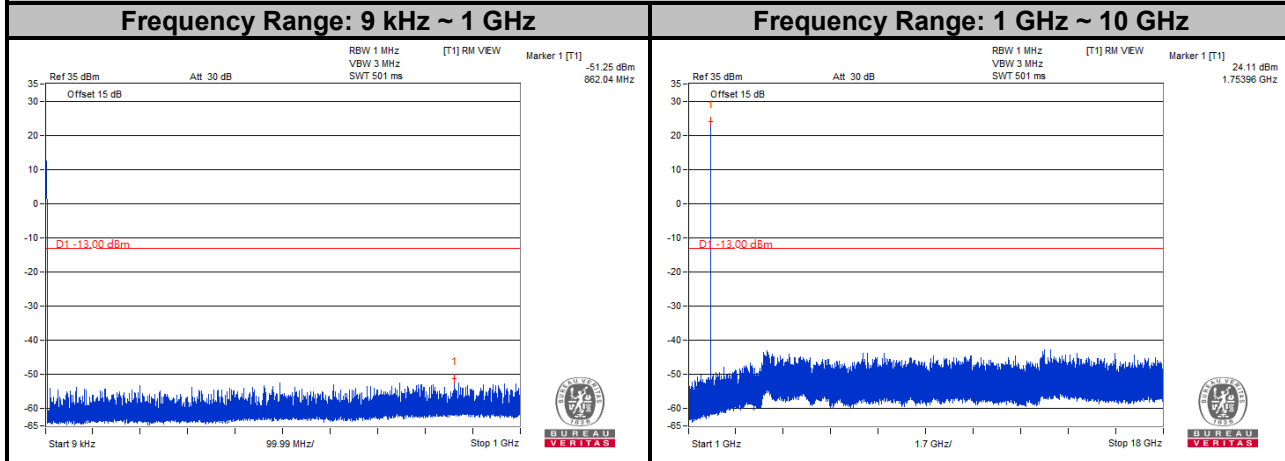


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


**LTE Band 4**  
**Channel Bandwidth: 3 MHz**  
**Channel 19965**

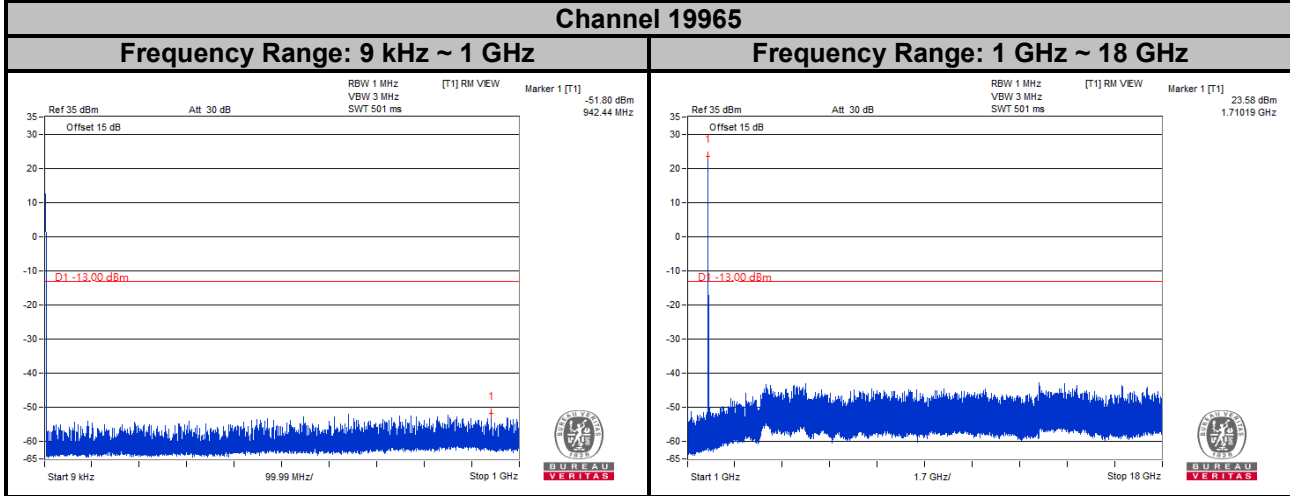

**Channel 20175**

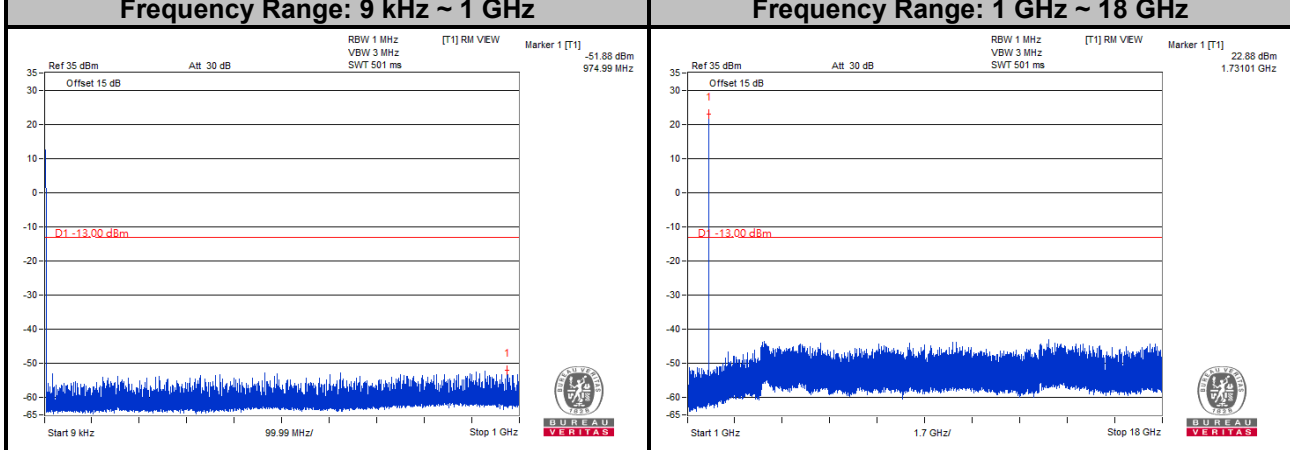


**Channel 20385**

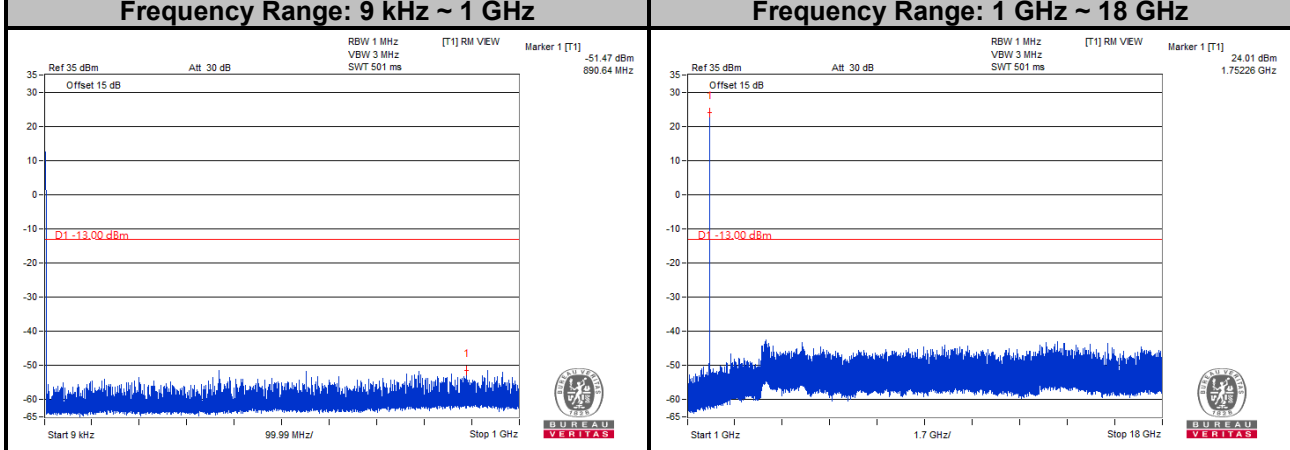


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


**LTE Band 4**  
**Channel Bandwidth: 5 MHz**  
**Channel 19975**

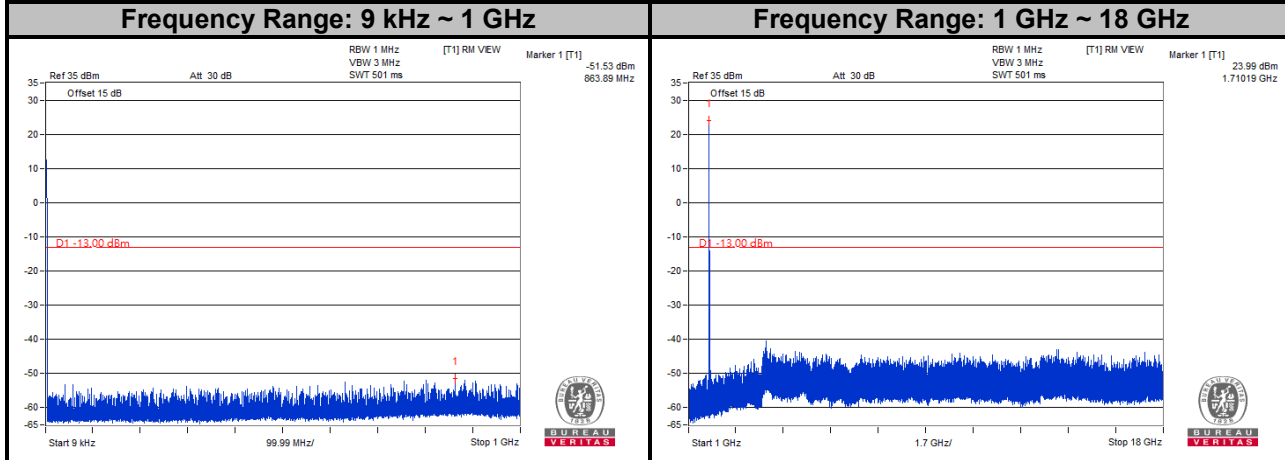

**Channel 20175**

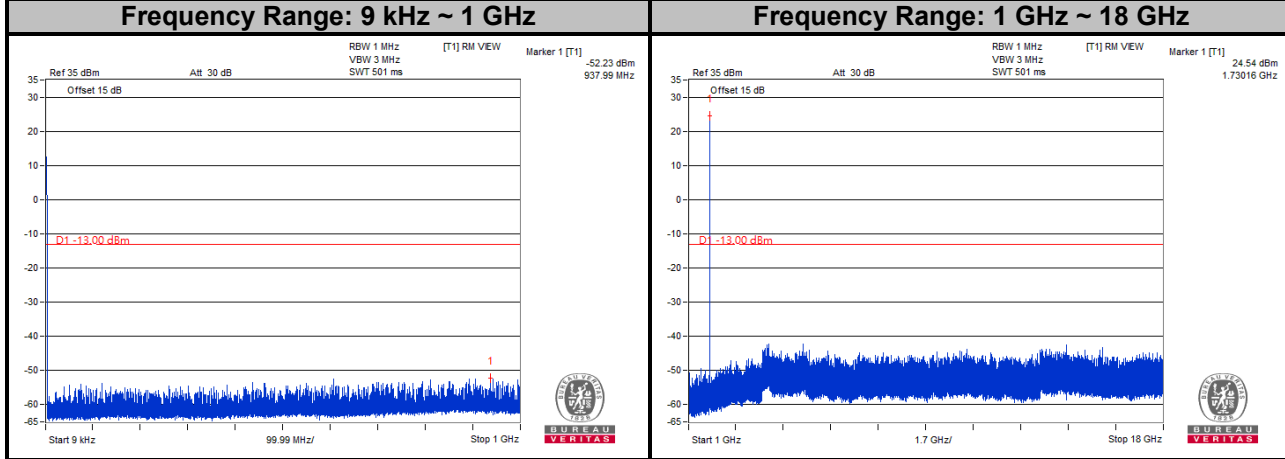


**Channel 20375**

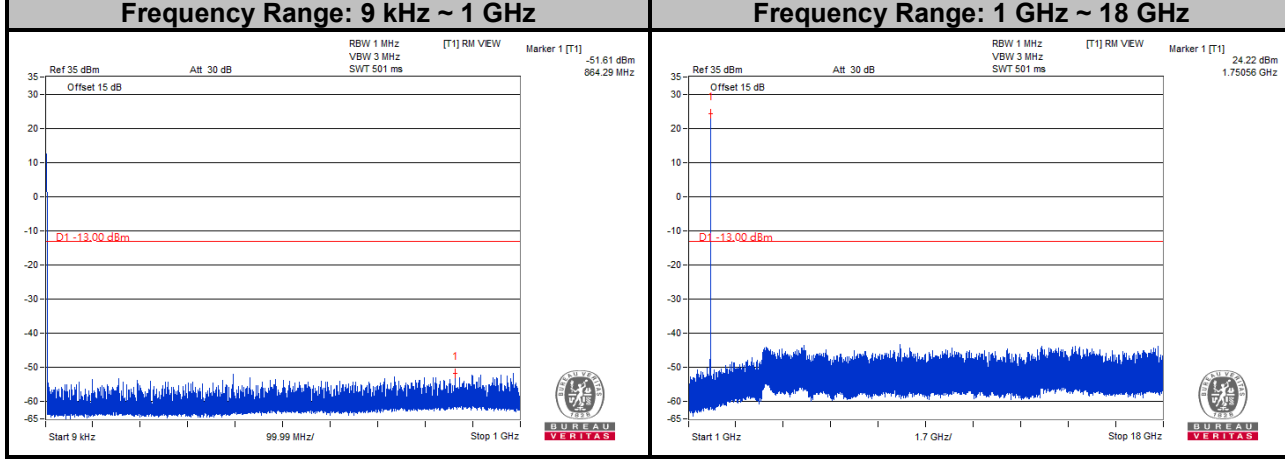


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


**LTE Band 4**  
**Channel Bandwidth: 10 MHz**  
**Channel 20000**

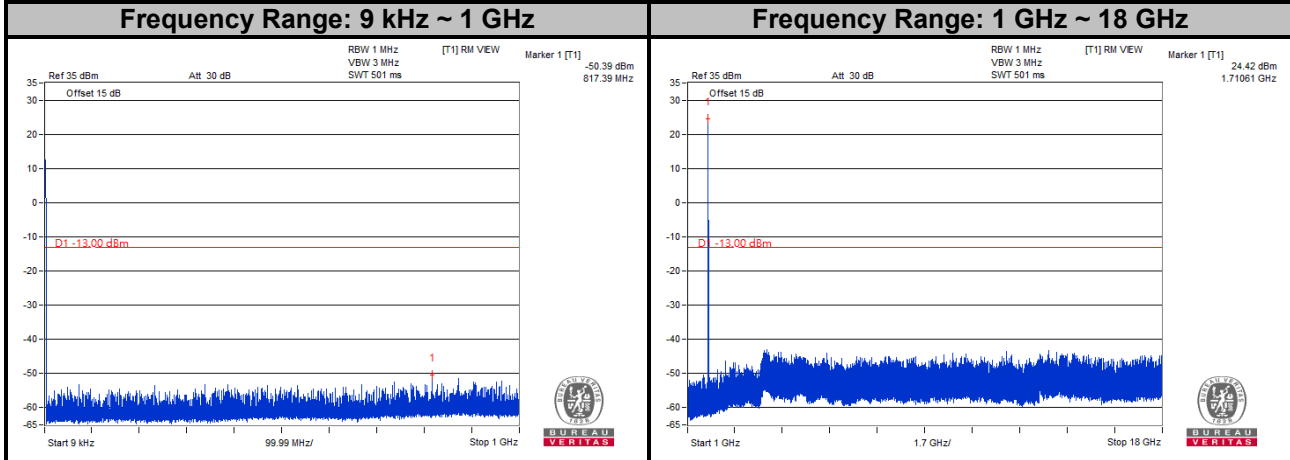


**Channel 20175**

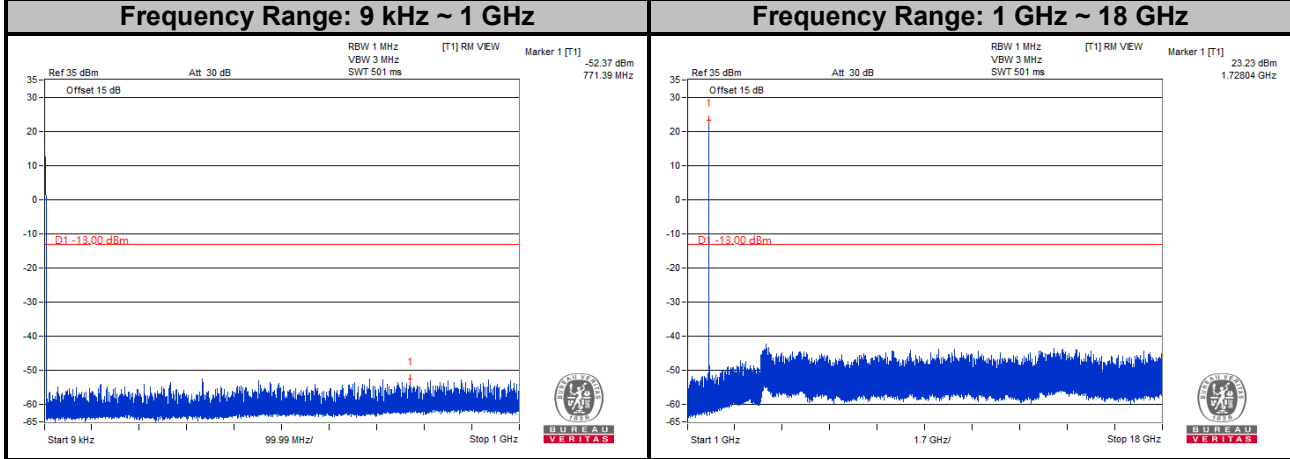

**Channel 20350**


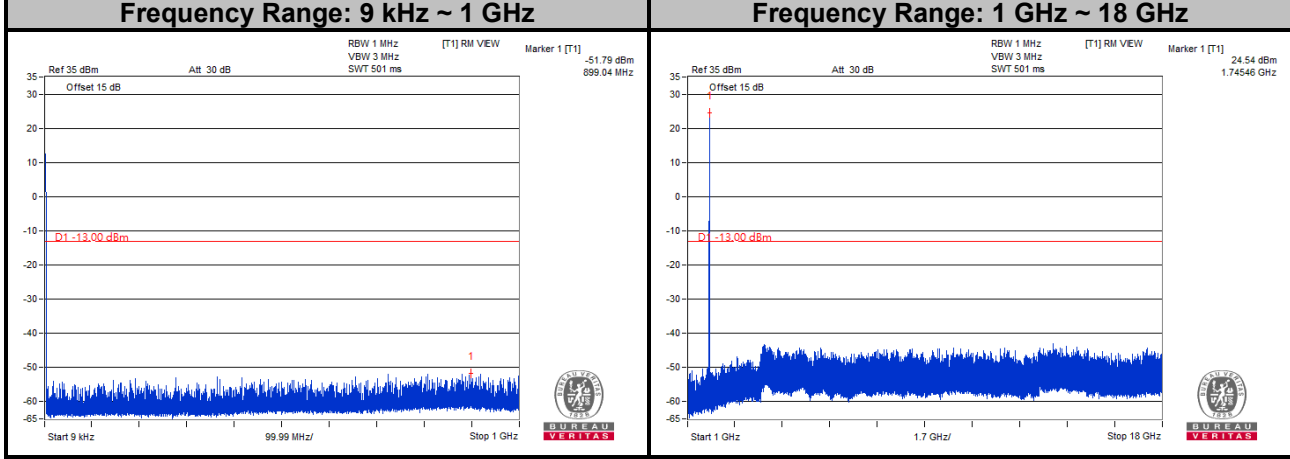


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


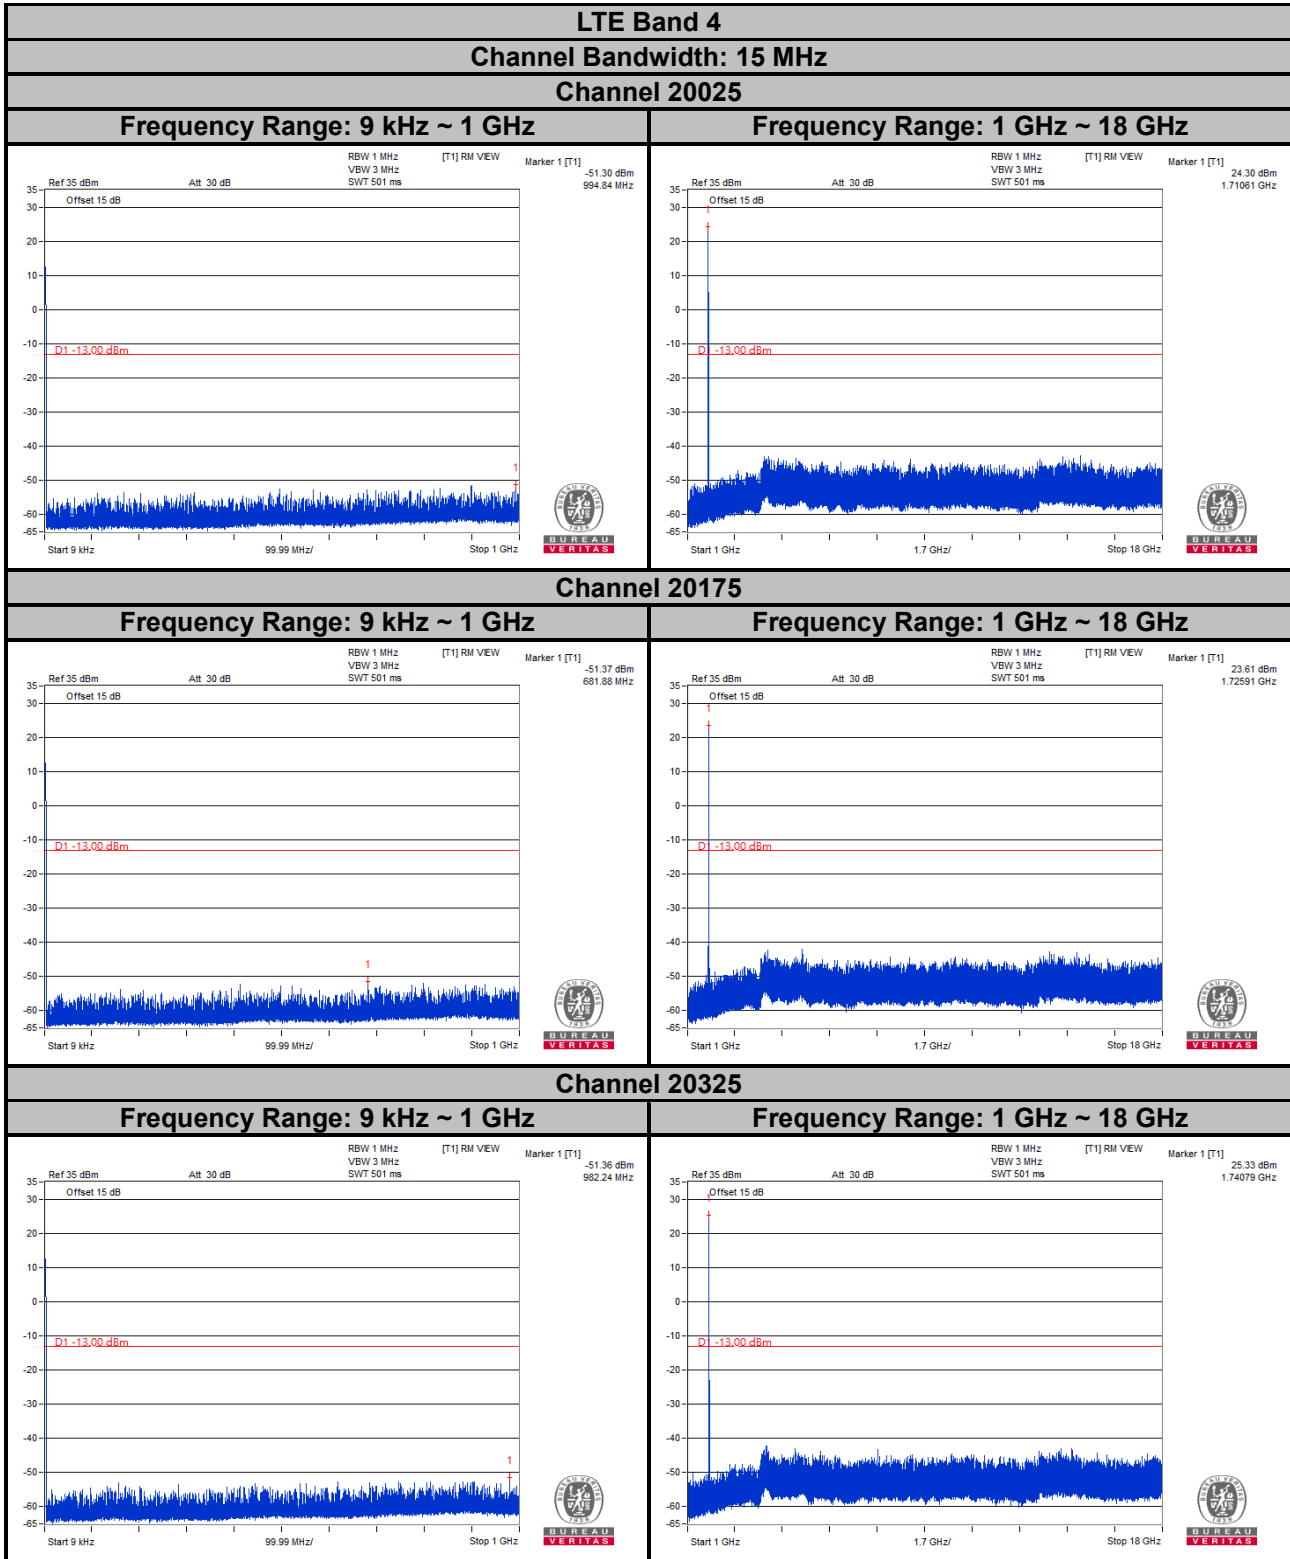


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



**LTE Band 4**  
**Channel Bandwidth: 20 MHz**  
**Channel 20050**

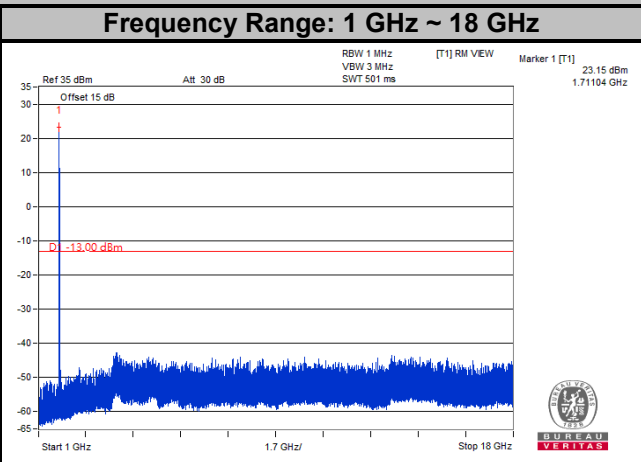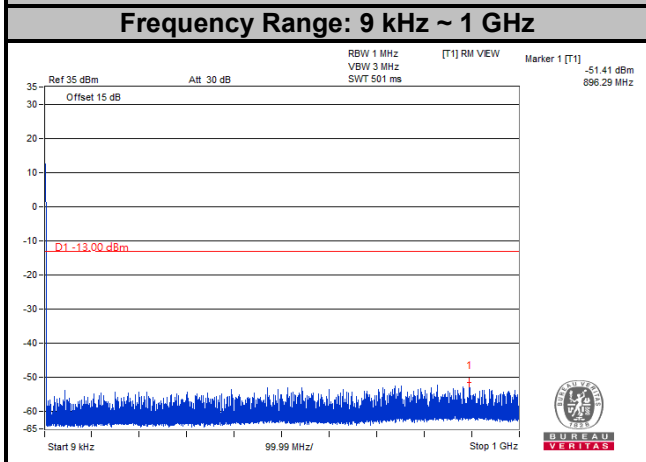

**Channel 20175**

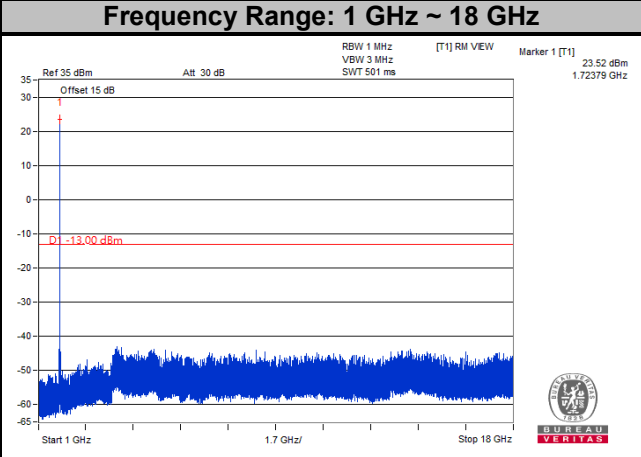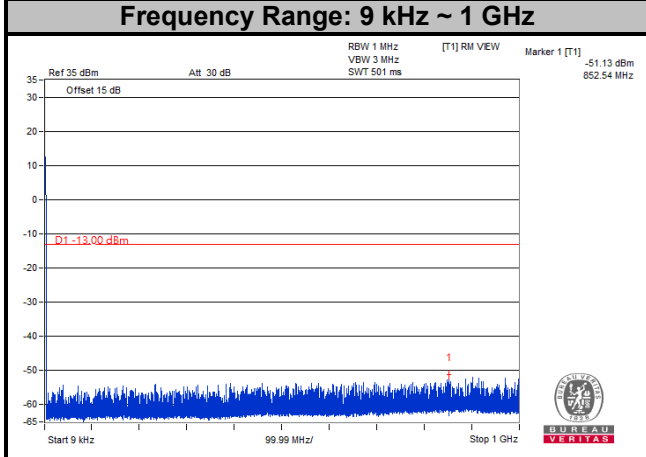



**Channel 20300**

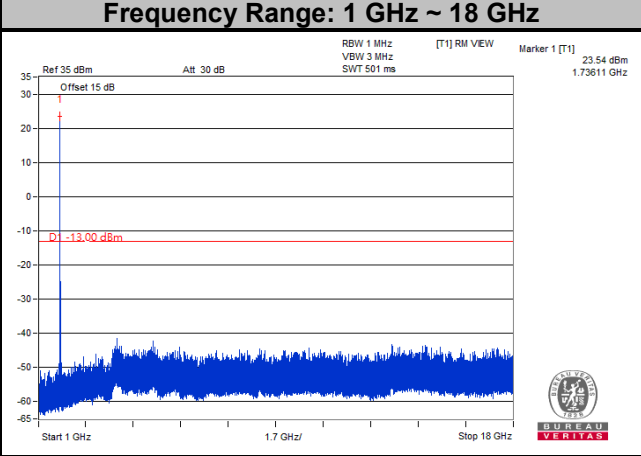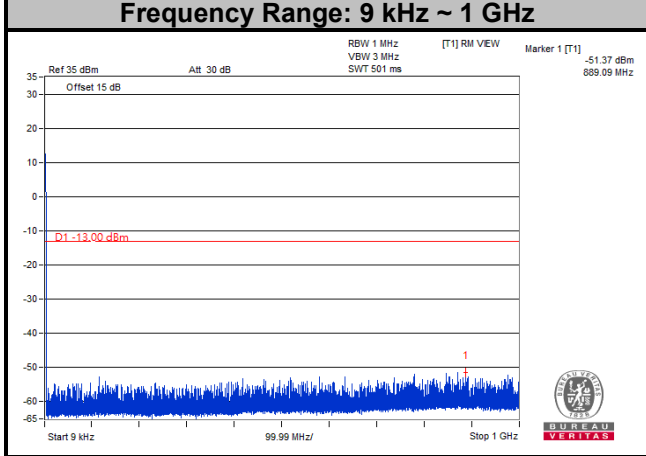



Note: The signal over the limit in 9 kHz is from spectrum analyzer.





**LTE Band 12**  
**Channel Bandwidth: 1.4 MHz**  
**Channel 23017**

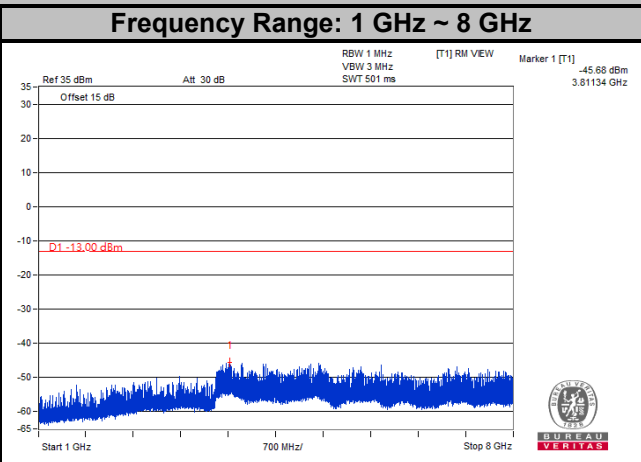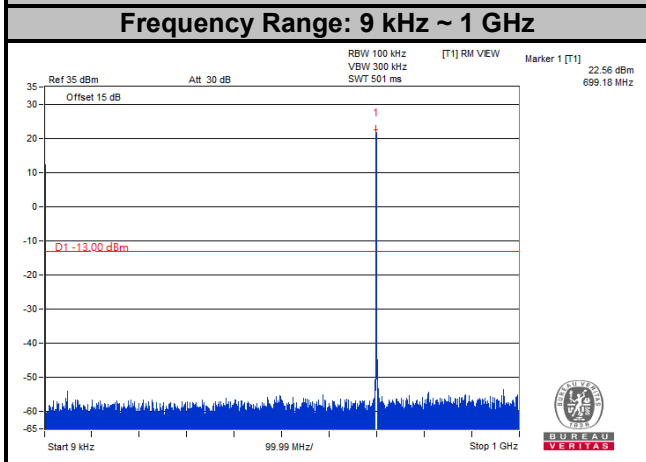

**Channel 23095**

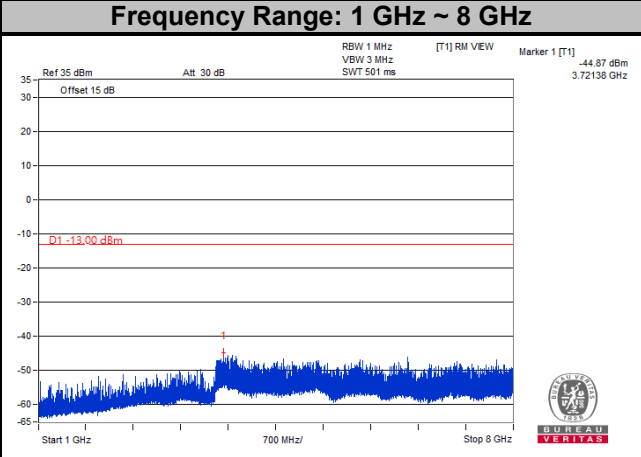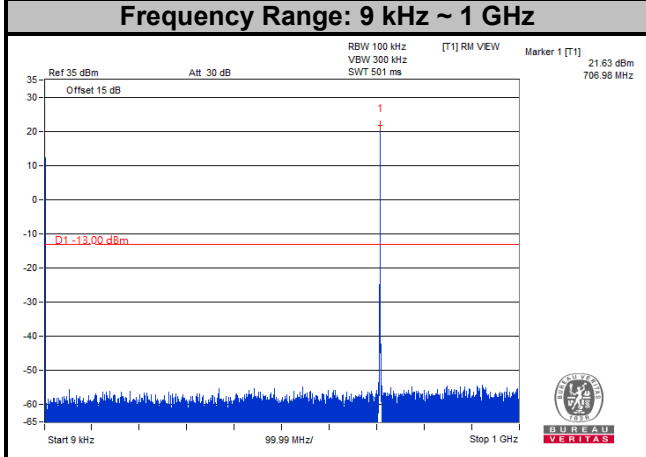


**Channel 23173**

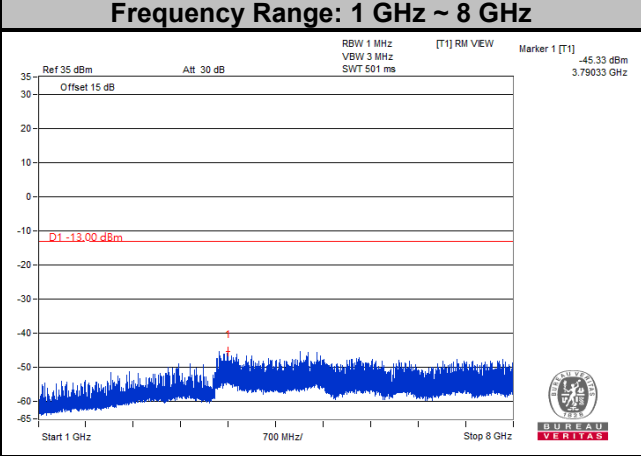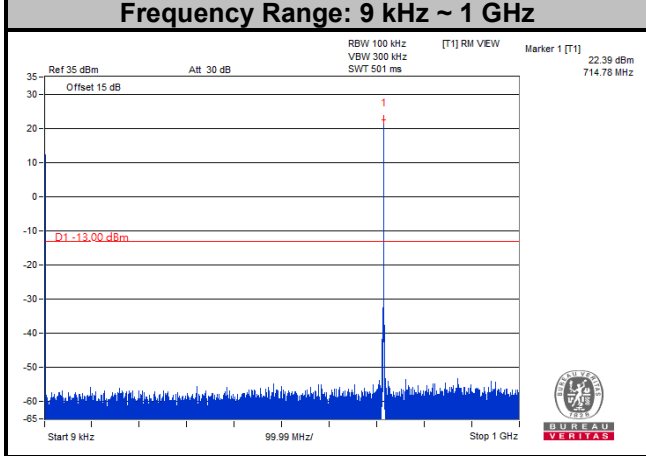


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


**LTE Band 12**  
**Channel Bandwidth: 3 MHz**  
**Channel 23025**

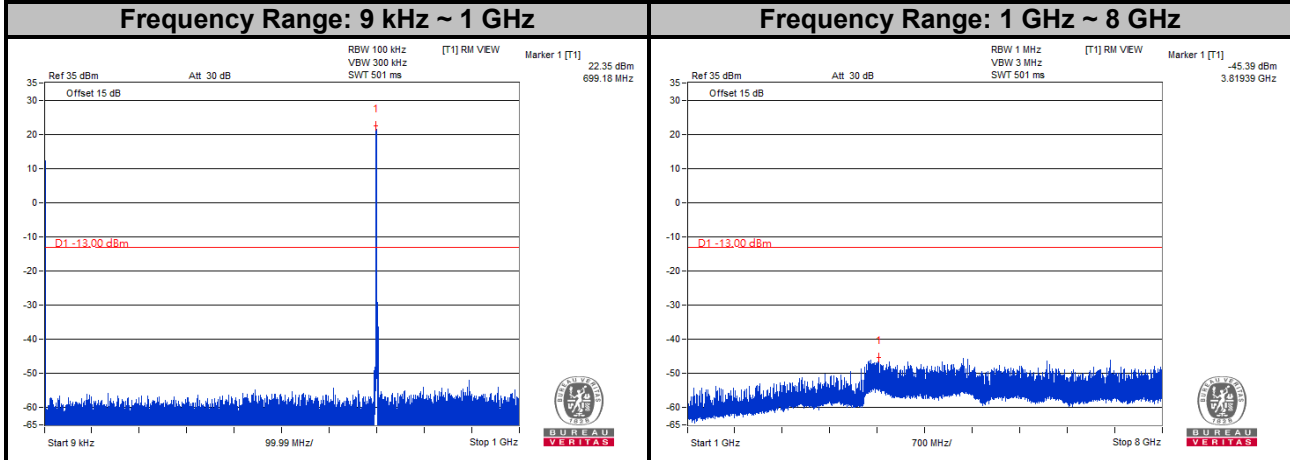

**Channel 23095**


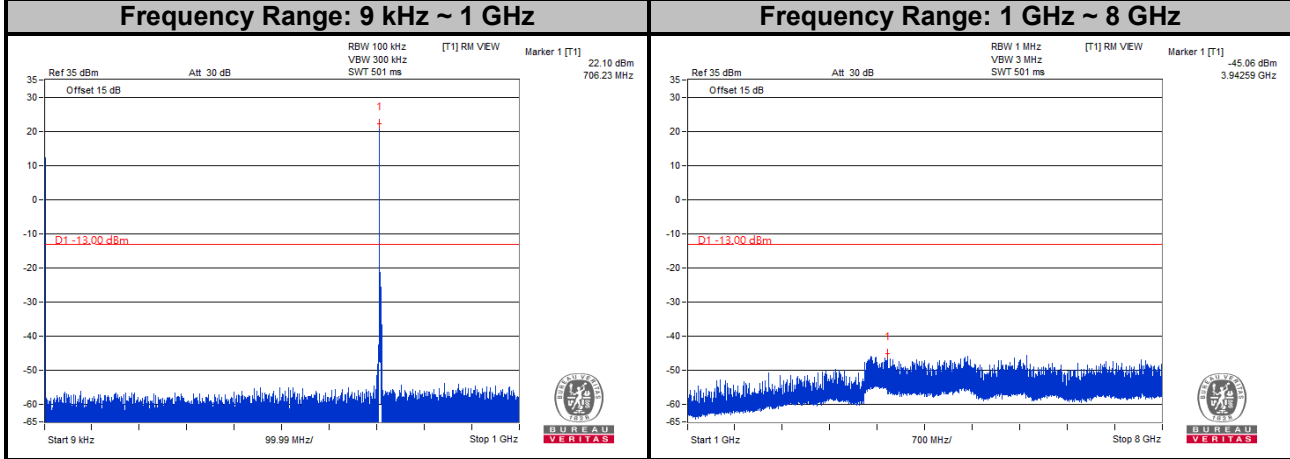


**Channel 23165**


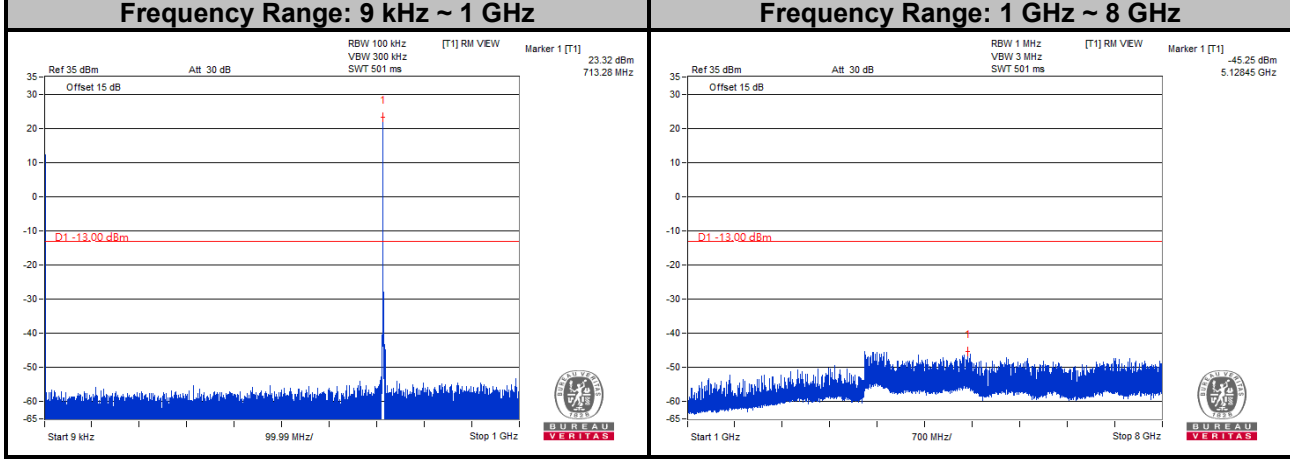


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



**LTE Band 12**  
**Channel Bandwidth: 5 MHz**  
**Channel 23035**

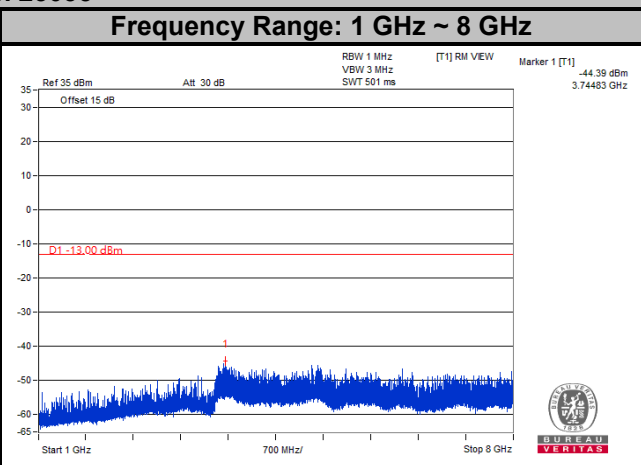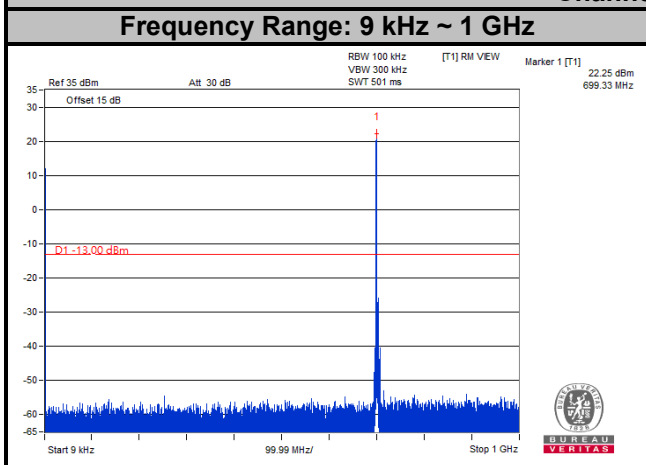

**Channel 23095**

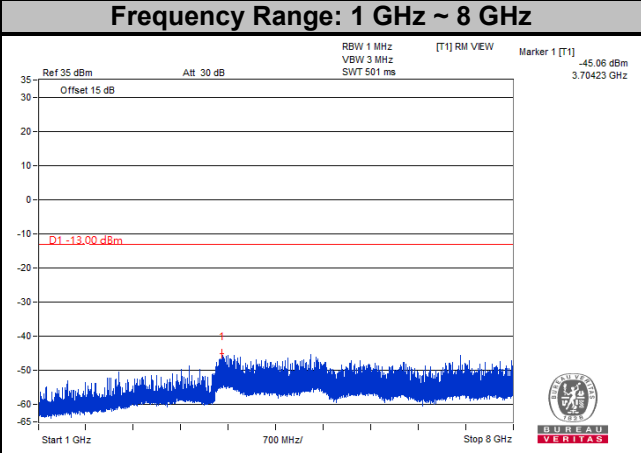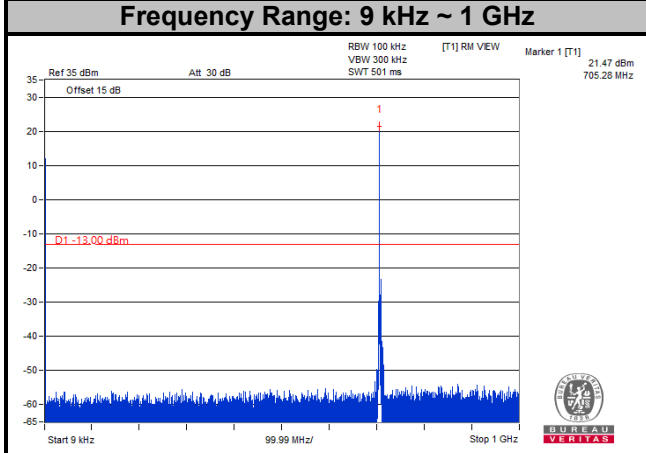


**Channel 23155**

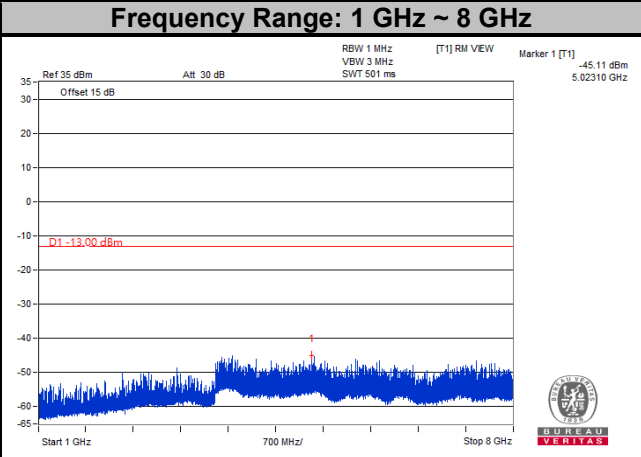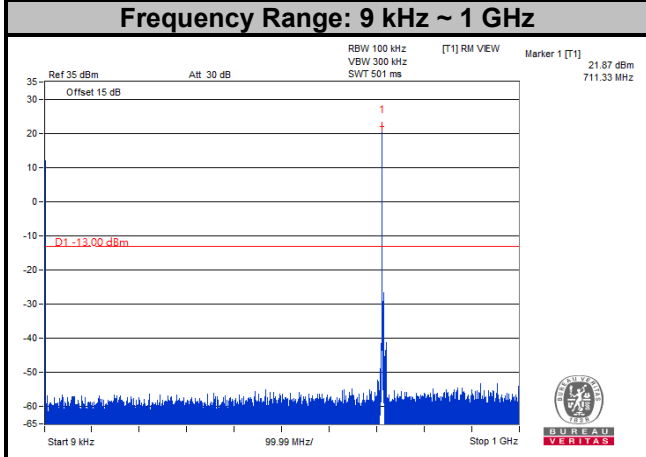


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


**LTE Band 12**  
**Channel Bandwidth: 10 MHz**  
**Channel 23060**

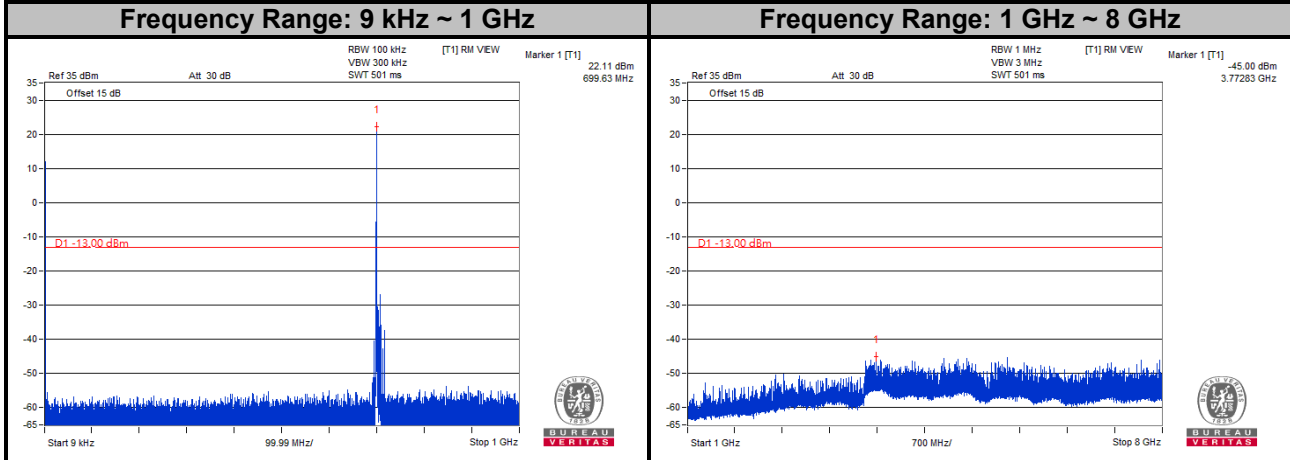

**Channel 23095**

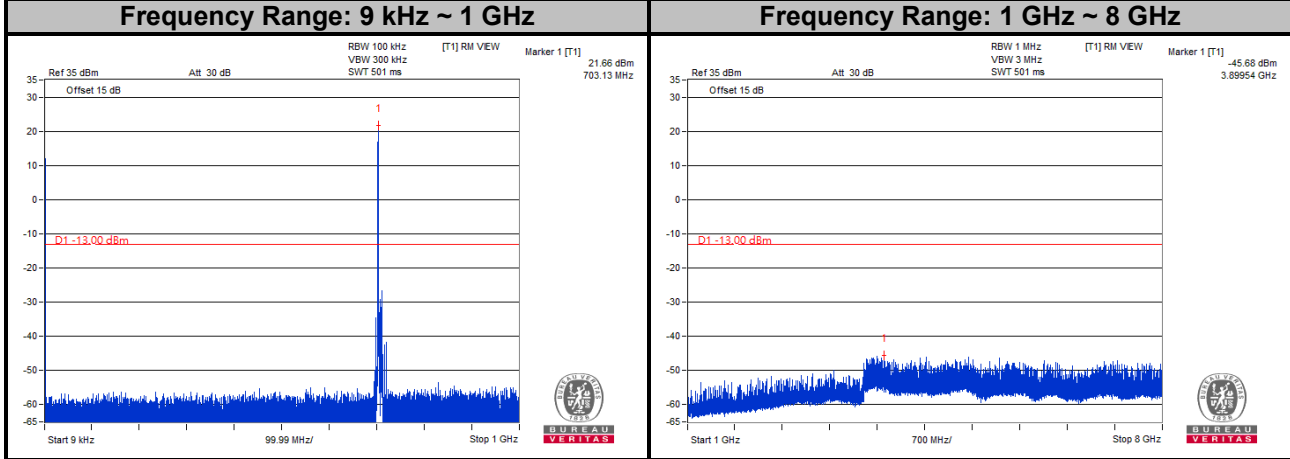

**Channel 23130**

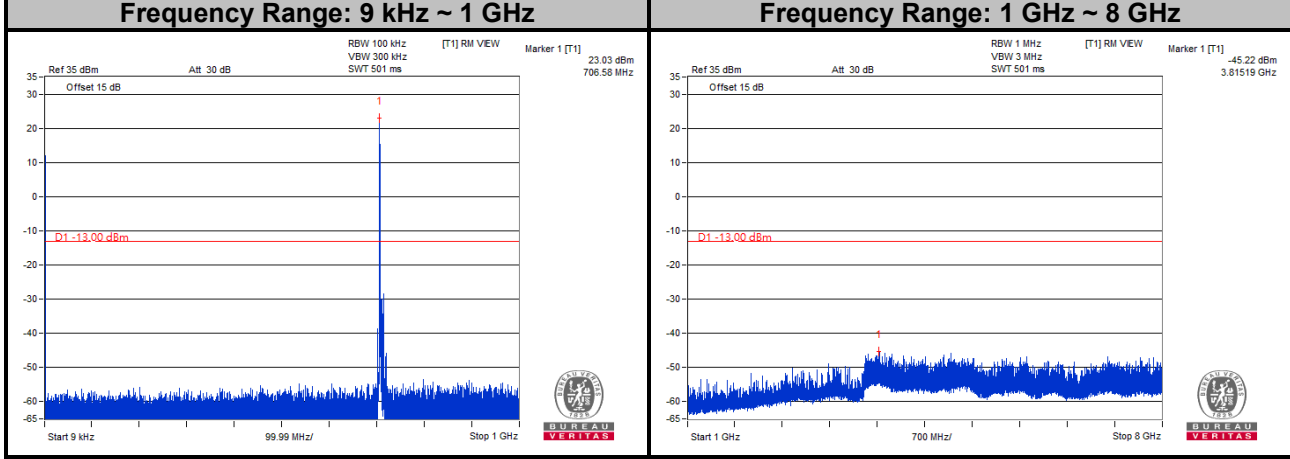

Note: The signal over the limit in 9 kHz is from spectrum analyzer.



**LTE Band 13**

**Channel Bandwidth: 5 MHz**

**Channel 23205**



**Frequency Range: 9 kHz ~ 1 GHz**

**Frequency Range: 1 GHz ~ 1.559 GHz**

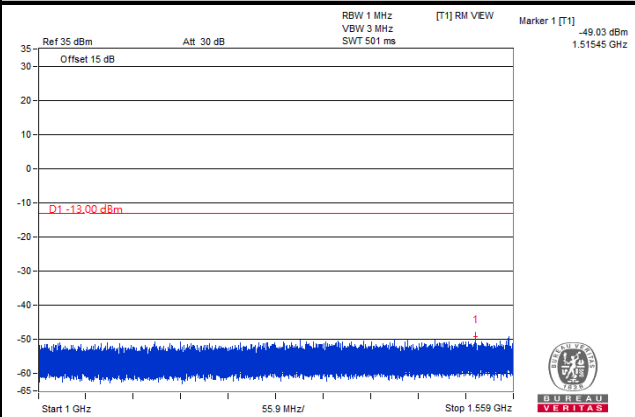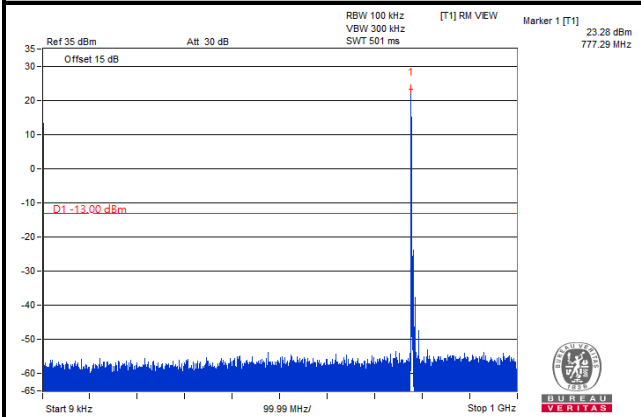


**Frequency Range: 1.559 GHz ~ 1.61 GHz**


**Frequency Range: 1.61 GHz ~ 8 GHz**

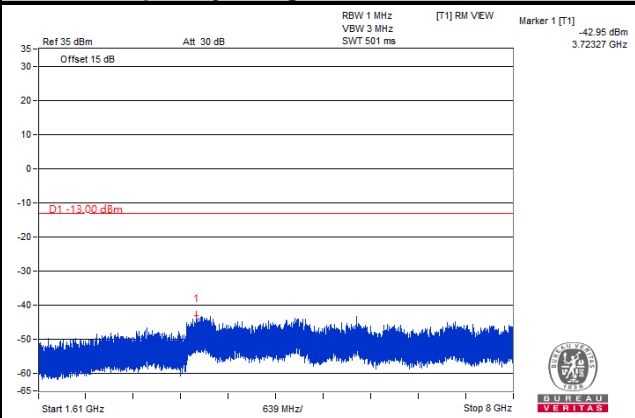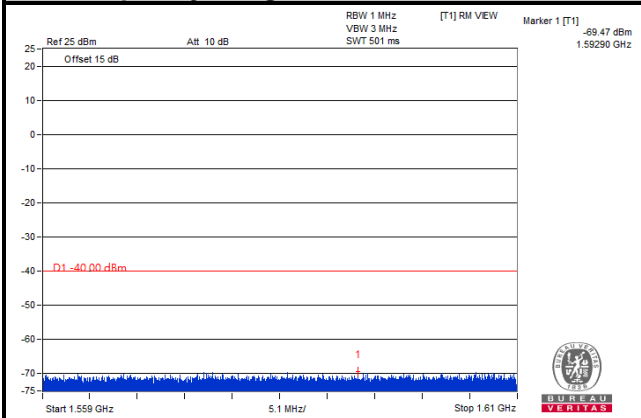

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

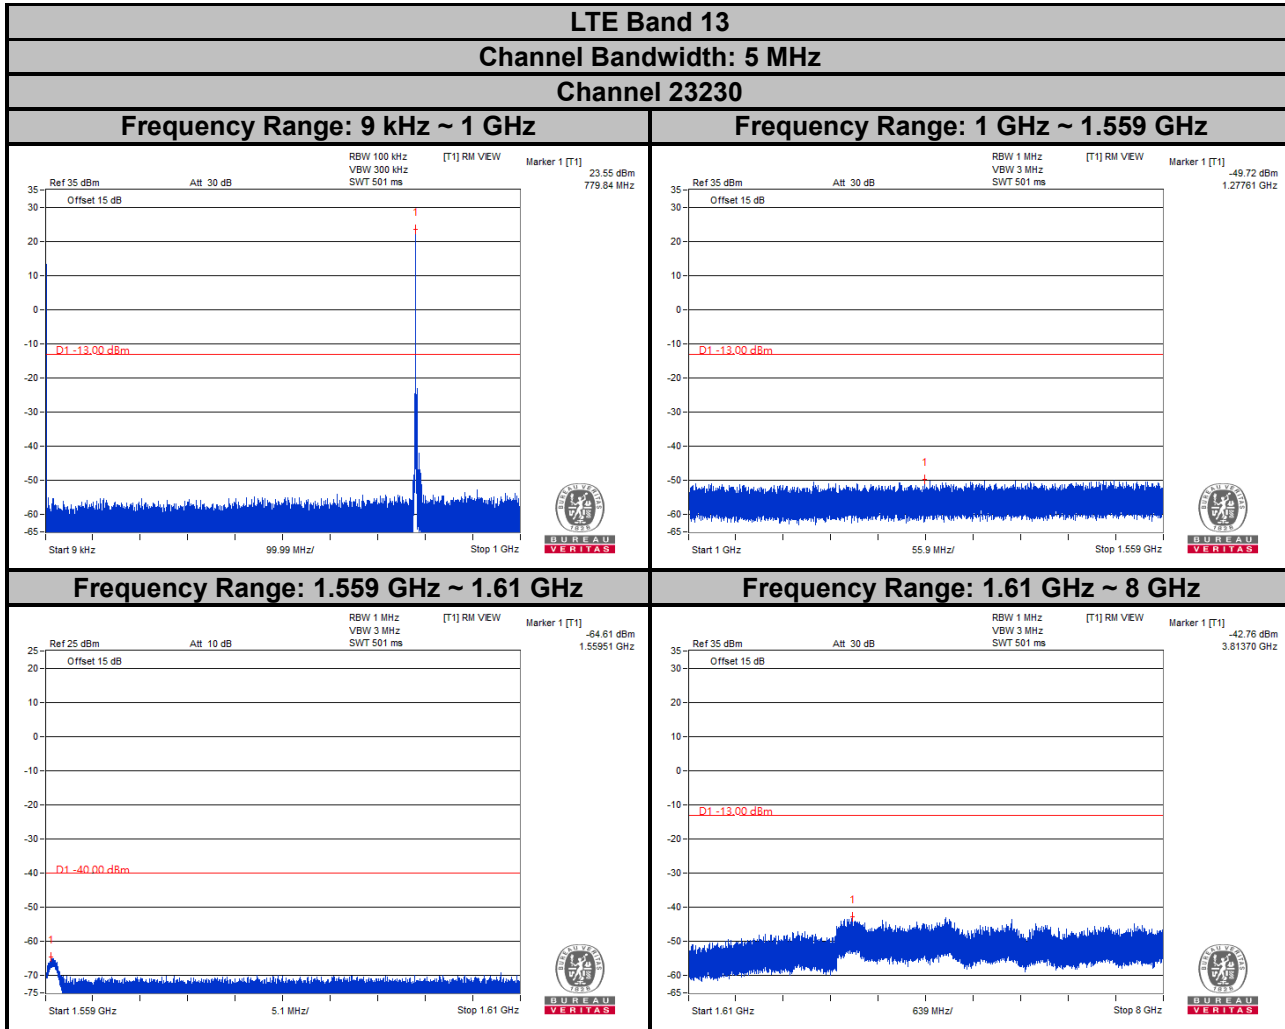

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

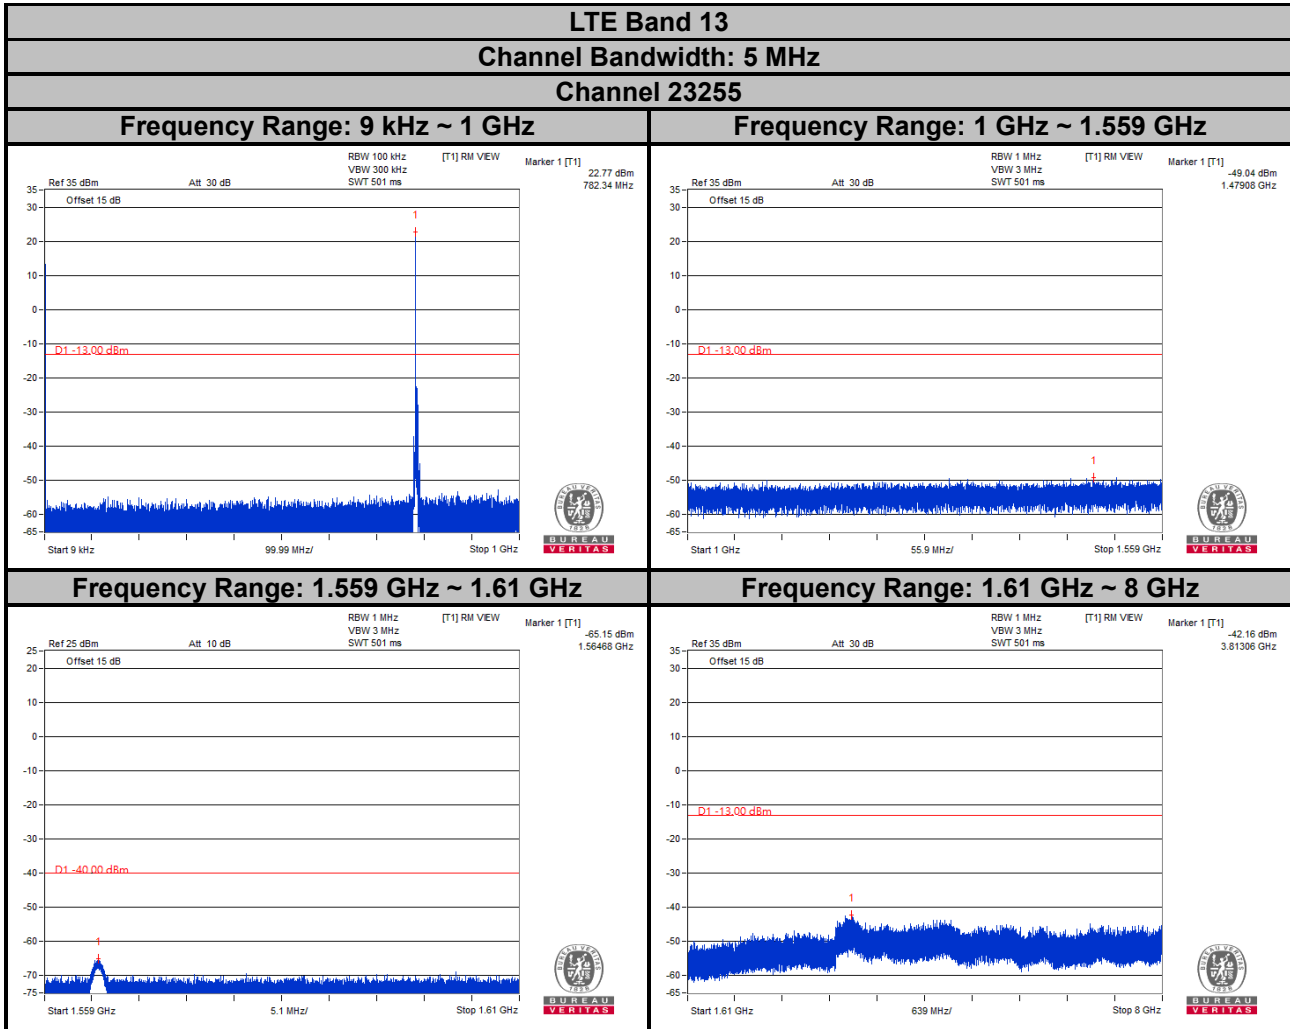

Note: The signal over the limit in 9 kHz is from spectrum analyzer.



**LTE Band 13**

**Channel Bandwidth: 10 MHz**

**Channel 23230**



**Frequency Range: 9 kHz ~ 1 GHz**

**Frequency Range: 1 GHz ~ 1.559 GHz**

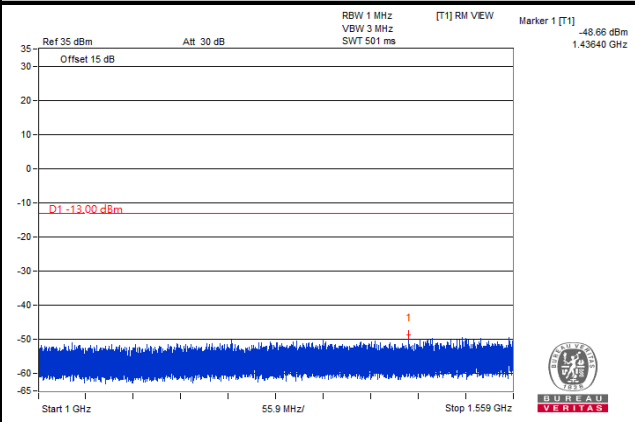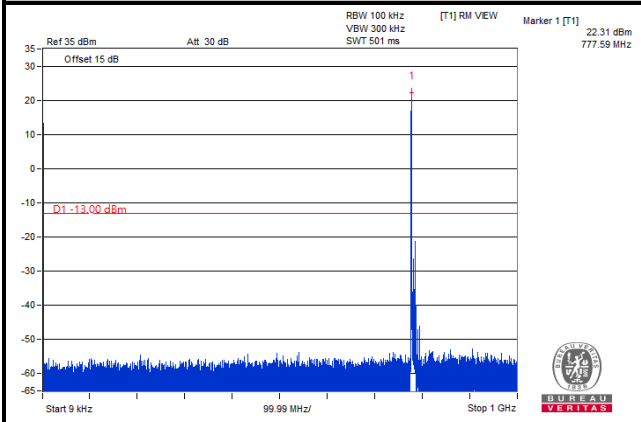

**Frequency Range: 1.559 GHz ~ 1.61 GHz**



**Frequency Range: 1.61 GHz ~ 8 GHz**

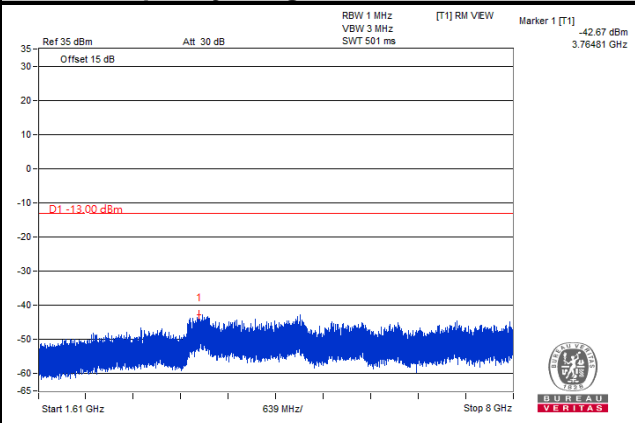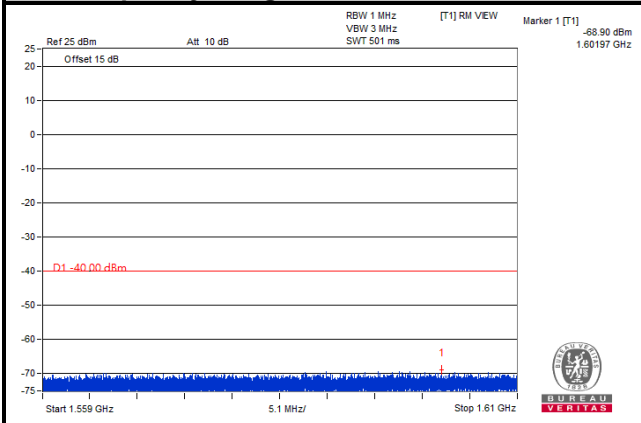



Note: The signal over the limit in 9 kHz is from spectrum analyzer.





**LTE Band 66**  
**Channel Bandwidth: 1.4 MHz**  
**Channel 131979**

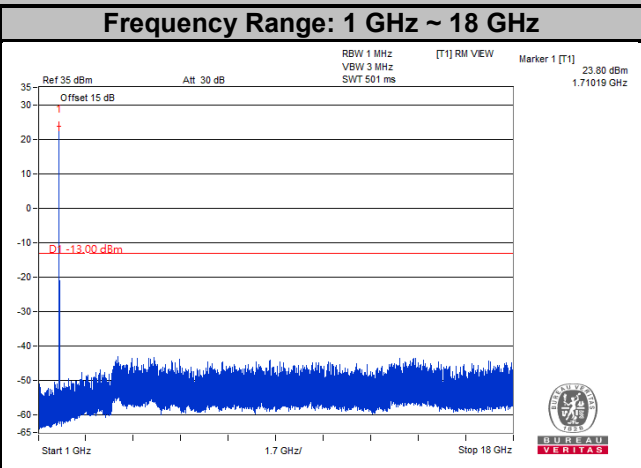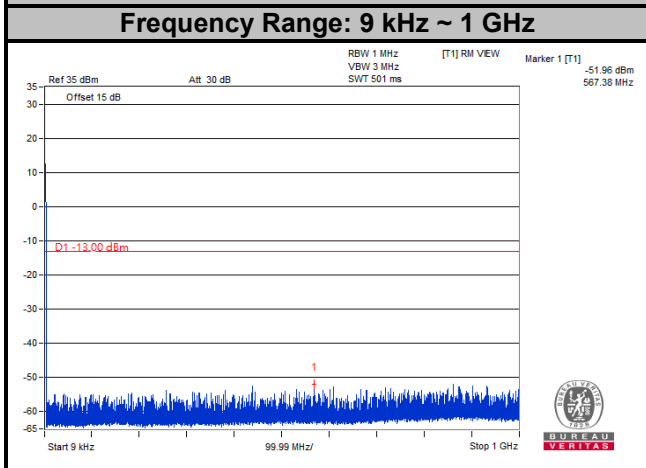

**Channel 132322**

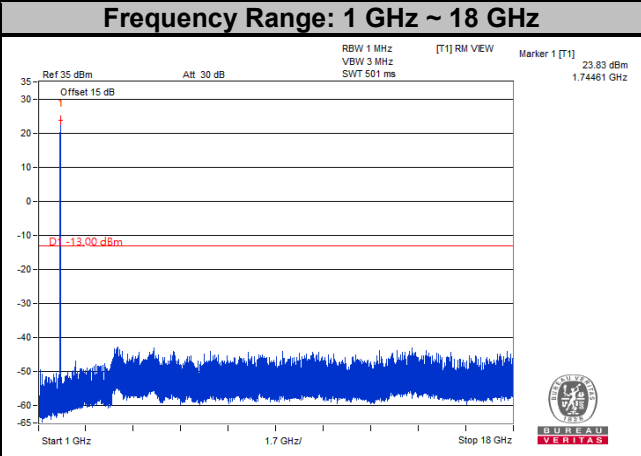
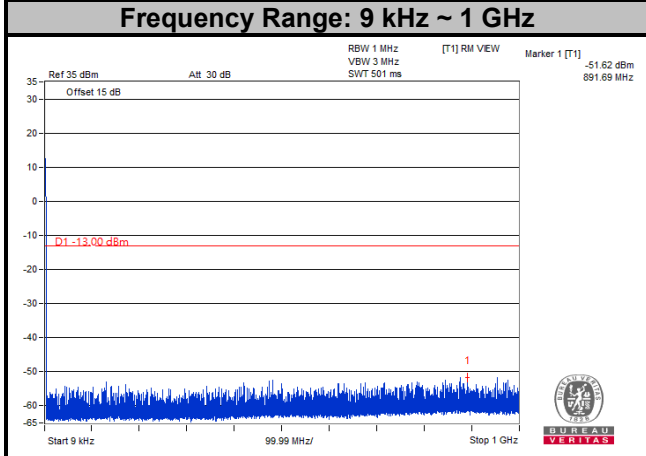


**Channel 132665**

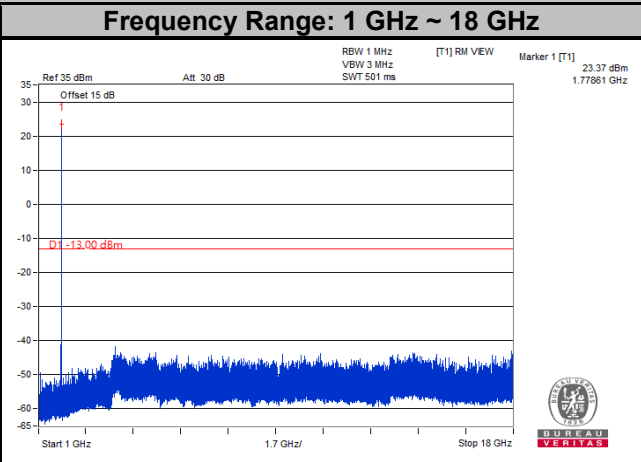
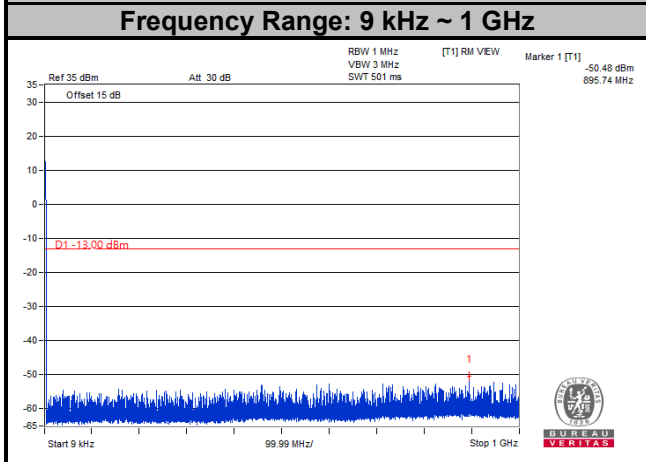


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



**LTE Band 66**  
**Channel Bandwidth: 3 MHz**  
**Channel 131987**

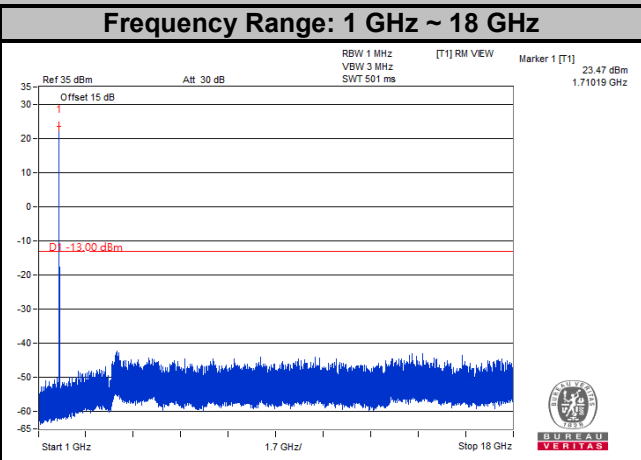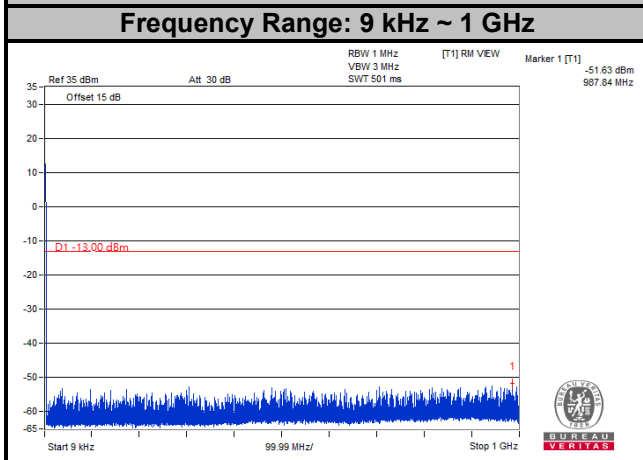

**Channel 132322**

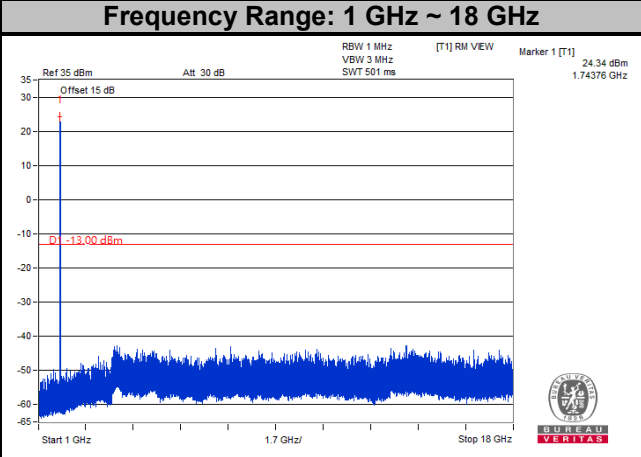
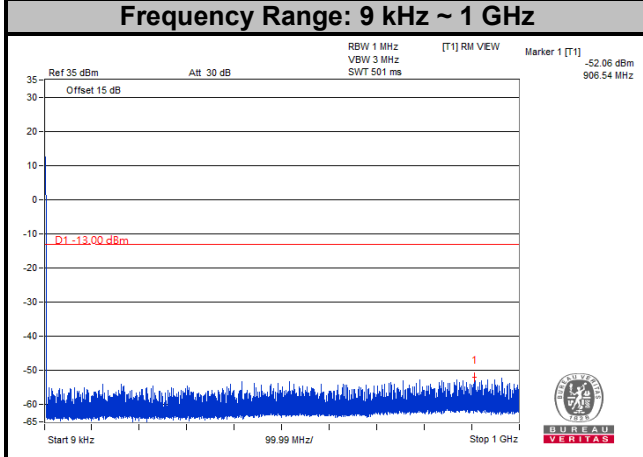


**Channel 132657**

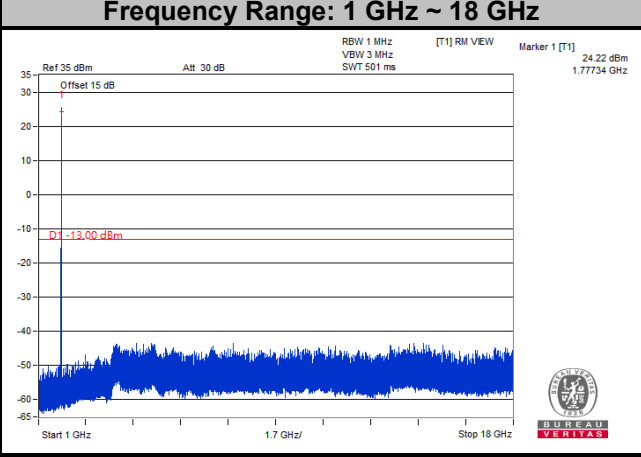
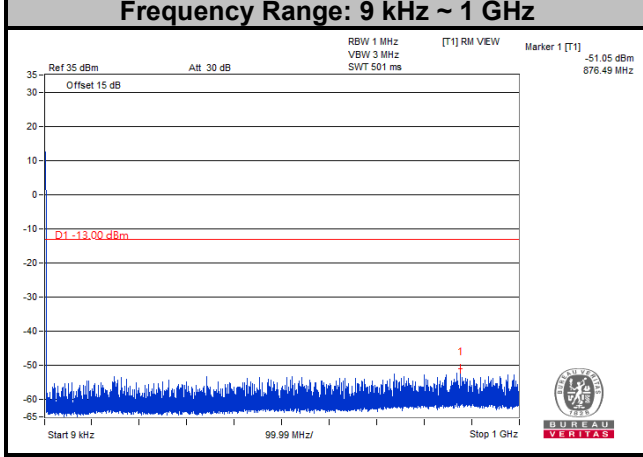


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



**LTE Band 66**  
**Channel Bandwidth: 5 MHz**  
**Channel 131997**

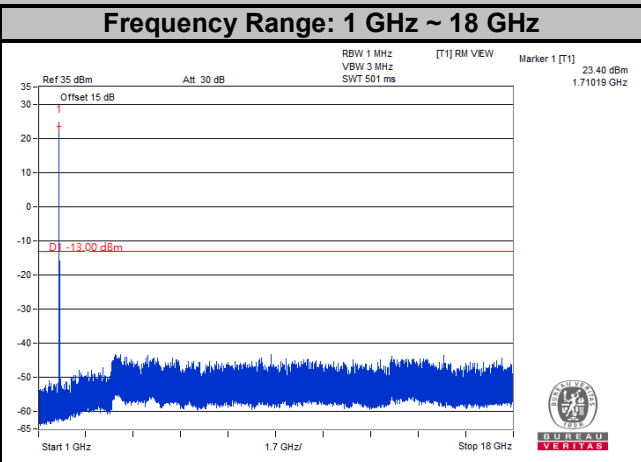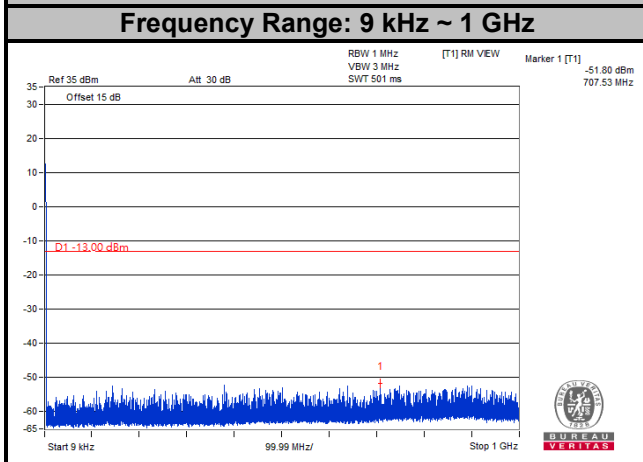

**Channel 132322**

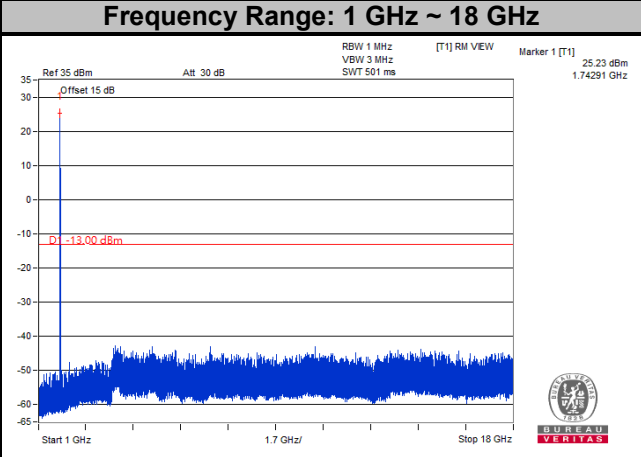
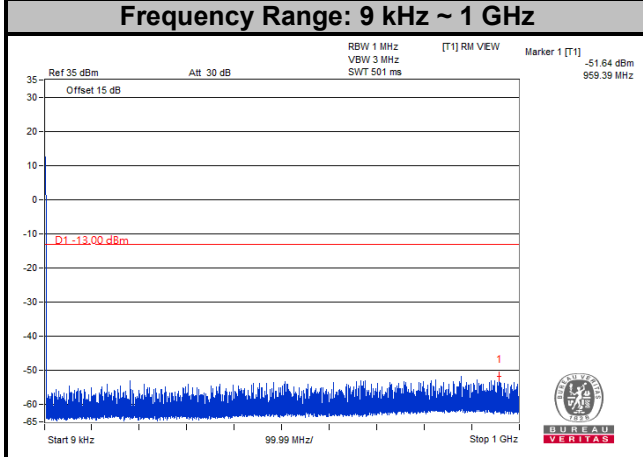


**Channel 132647**

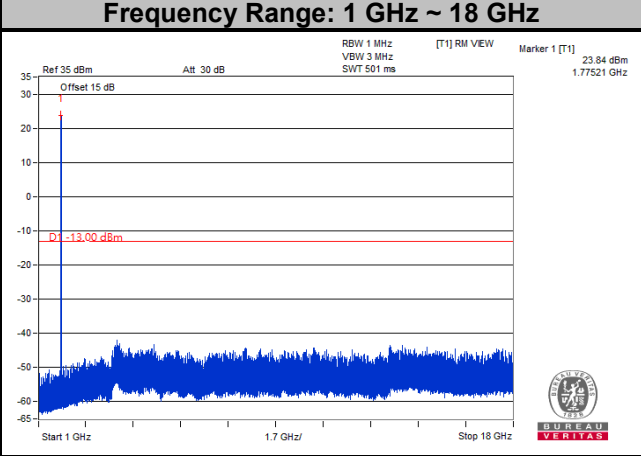
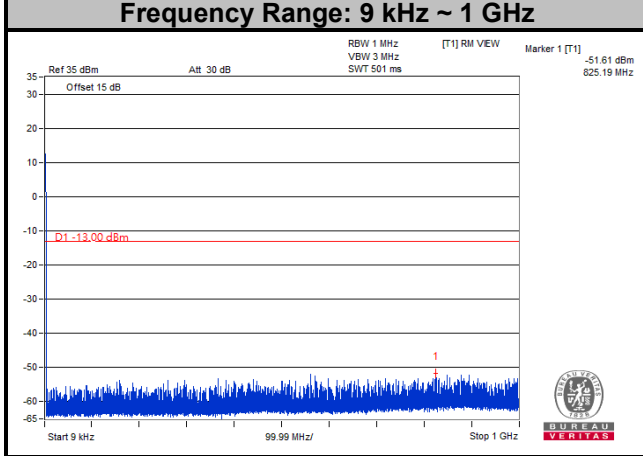


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



**LTE Band 66**  
**Channel Bandwidth: 10 MHz**  
**Channel 132022**

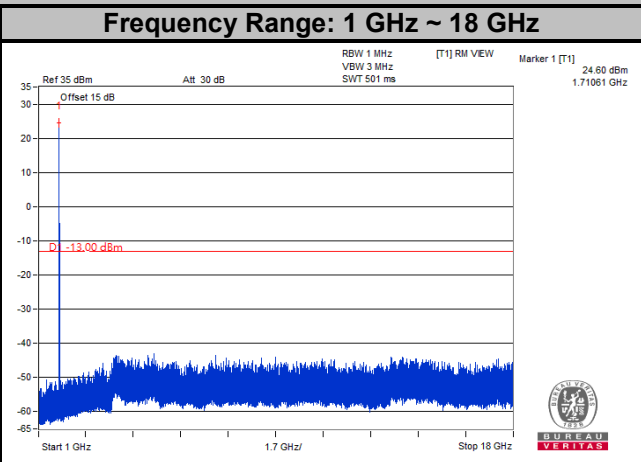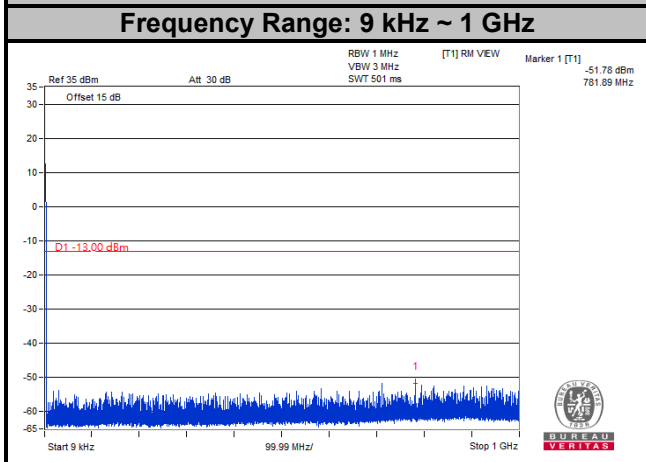

**Channel 132322**

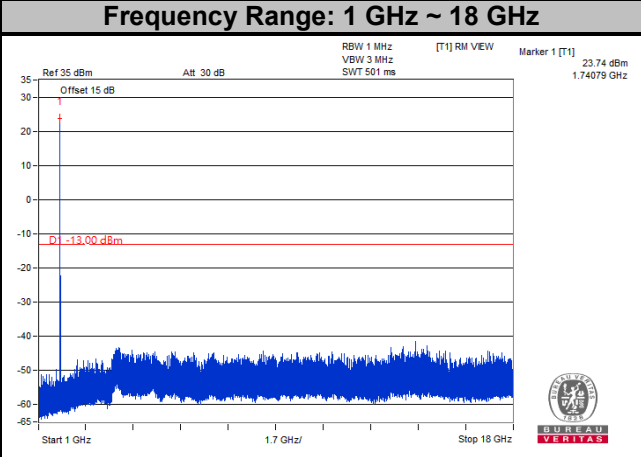
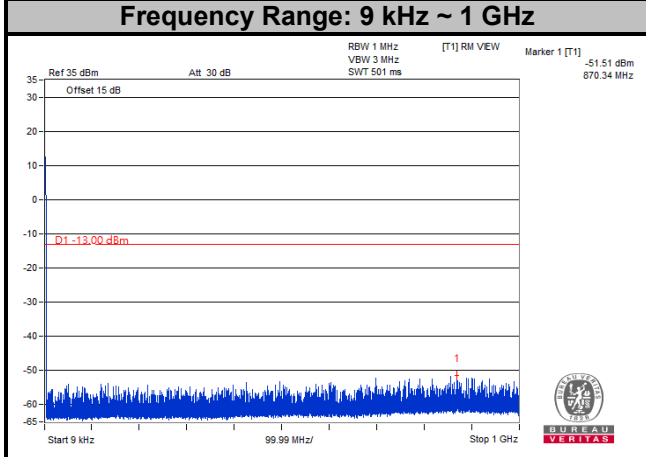


**Channel 132622**

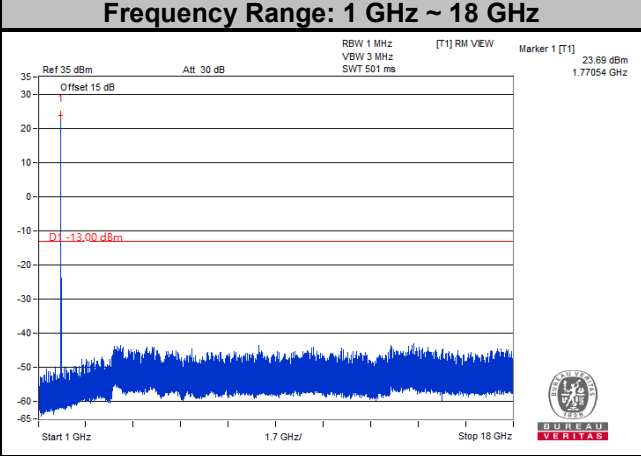
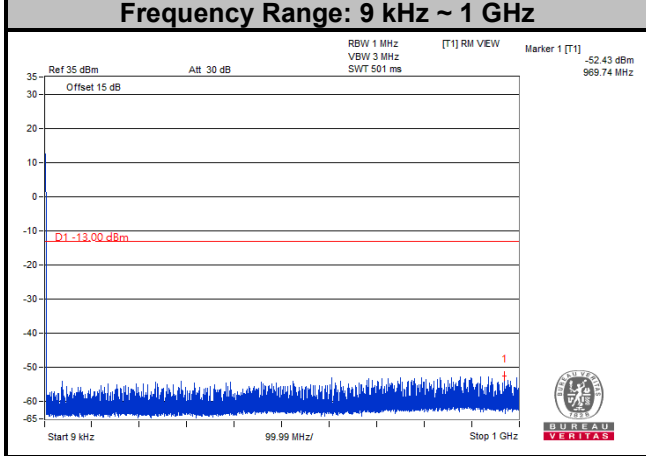


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



**LTE Band 66**  
**Channel Bandwidth: 15 MHz**  
**Channel 132047**

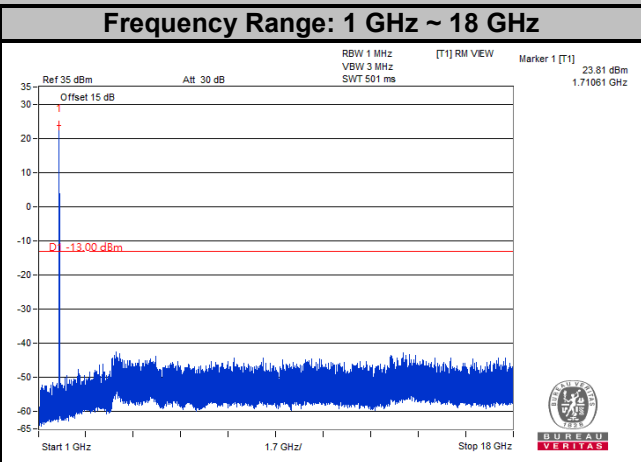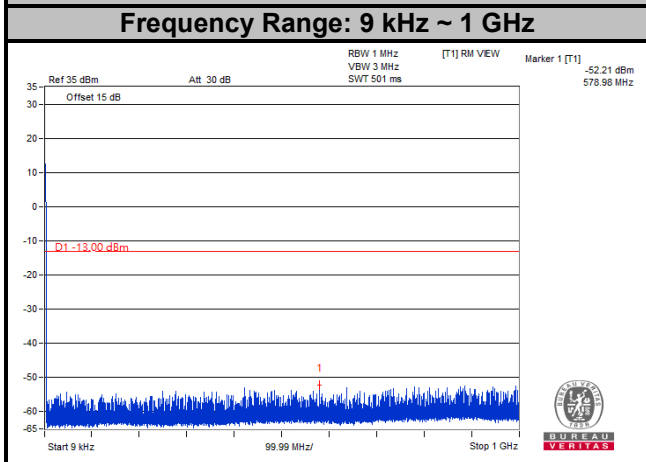


**Channel 132322**

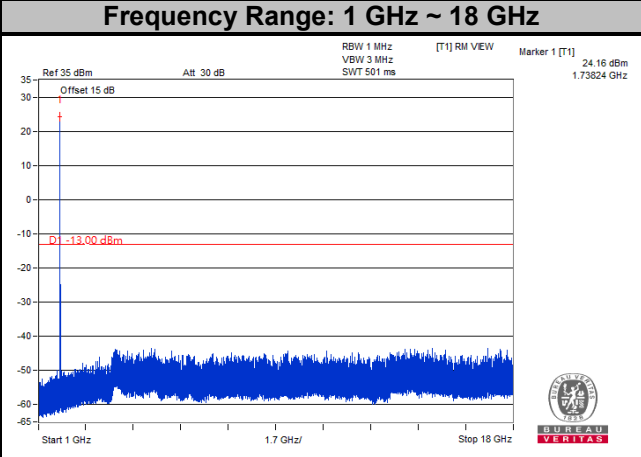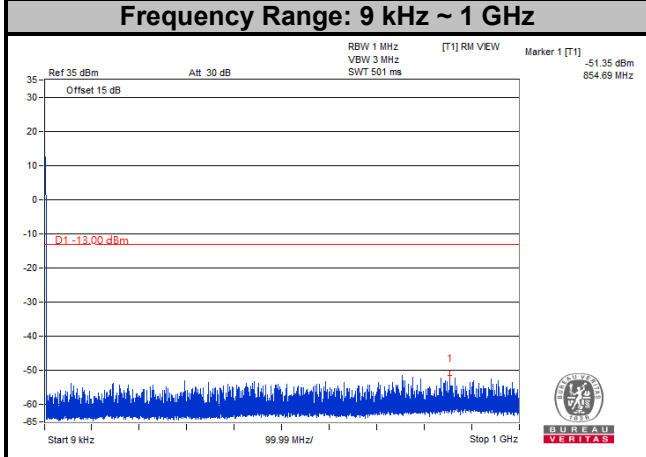

**Channel 132597**

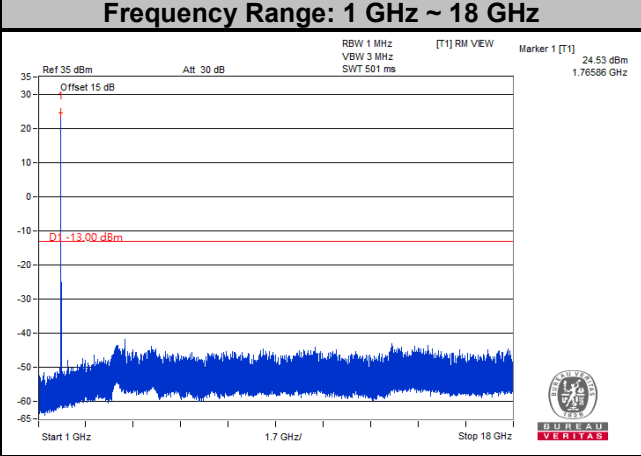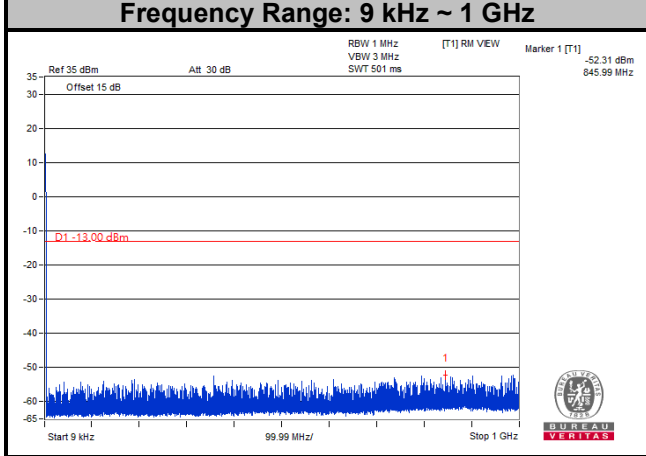

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

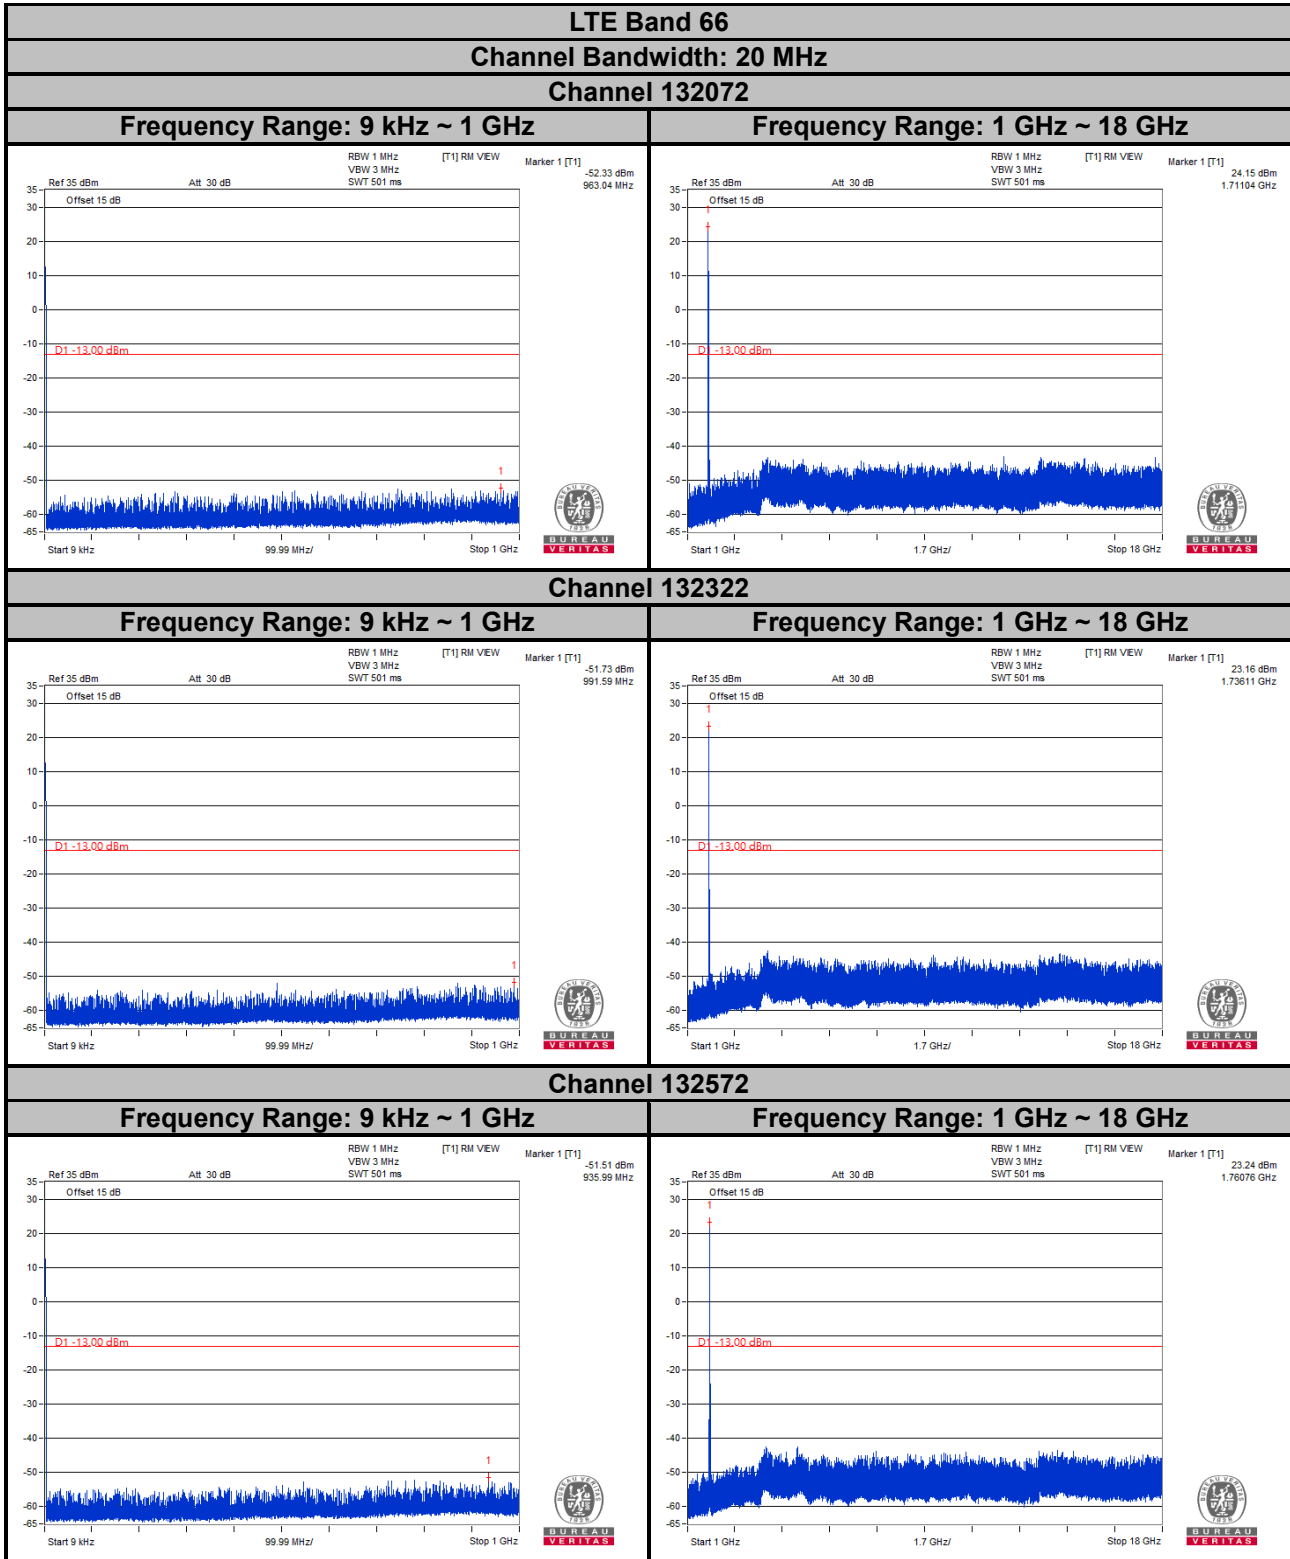

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits of Radiated Emission Measurement

For WCDMA band 4, LTE Band 4, 66:

According to FCC 27.53(h), for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log (P)$  dB.

For LTE Band 12:

According to FCC 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. The limit of emissions is equal to -13 dBm.

For LTE Band 13:

According to FCC 27.53(c)(2), for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit of emissions is equal to -13 dBm.

According to FCC 27.53(f), for operations in the 775-788 MHz, emissions in the band 1559-1610MHz shall be limited to -70 dBW/MHz (EIRP). The limit of emissions is equal to -40 dBm.

### 4.8.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7  
EIRP (dBm) =  $E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.  
ERP (dBm) =  $E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.

#### Note:

1. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:  
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.
2. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

### 4.8.3 Deviation from Test Standard


No deviation.






4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

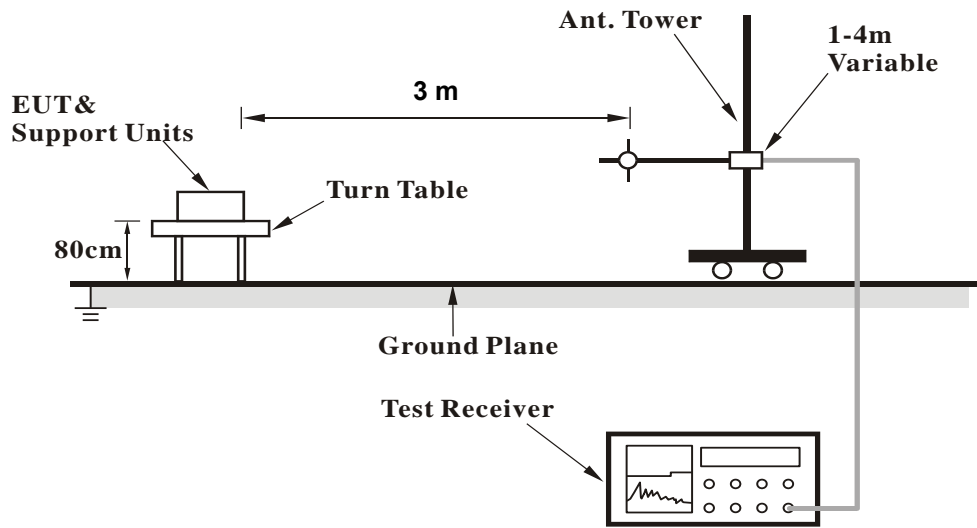

<Radiated Emission above 1 GHz>

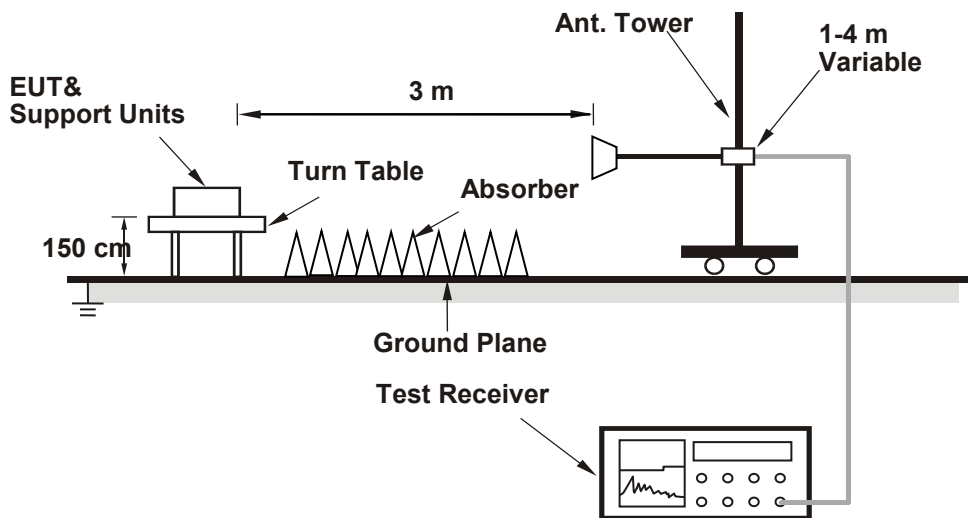

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.8.5 Test Results


##### Below 1 GHz

<b>RF Mode</b>	TX WCDMA Band IV	<b>Channel</b>	CH 1413 : 1732.6 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	84.32	-57.92	-13.00	-44.92	1.11 H	125	55.61	-113.53
2	224.00	-58.30	-13.00	-45.30	1.06 H	14	53.45	-111.75
3	453.89	-66.00	-13.00	-53.00	1.13 H	143	36.48	-102.48
4	761.38	-59.43	-13.00	-46.43	1.22 H	206	36.30	-95.73
5	872.93	-56.09	-13.00	-43.09	1.22 H	206	37.83	-93.92
6	940.83	-57.03	-13.00	-44.03	1.11 H	74	35.67	-92.70

##### Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

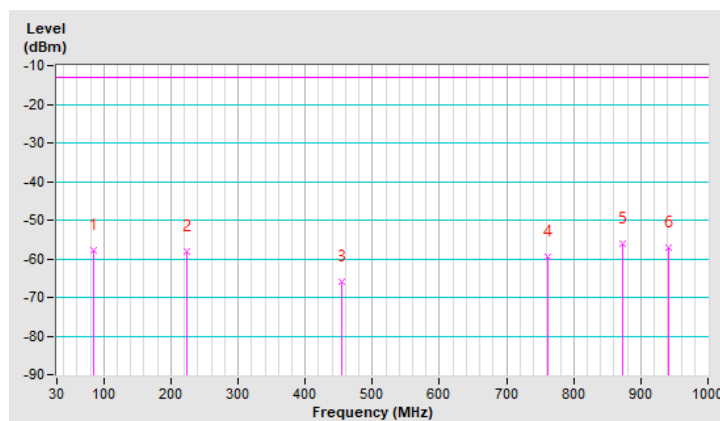


<b>RF Mode</b>	TX WCDMA Band IV	<b>Channel</b>	CH 1413 : 1732.6 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	87.23	-48.57	-13.00	-35.57	1.04 V	85	65.11	-113.68
2	218.18	-59.42	-13.00	-46.42	1.17 V	36	52.14	-111.56
3	484.93	-60.39	-13.00	-47.39	1.37 V	272	41.44	-101.83
4	667.29	-58.07	-13.00	-45.07	1.22 V	161	39.41	-97.48
5	840.92	-55.43	-13.00	-42.43	1.18 V	14	38.72	-94.15
6	978.66	-54.06	-13.00	-41.06	1.04 V	235	38.18	-92.24

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

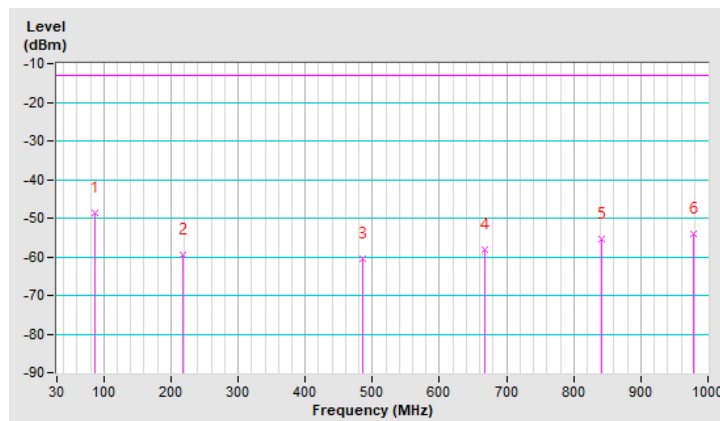


<b>RF Mode</b>	TX LTE Band IV-20MHz	<b>Channel</b>	CH 20175 : 1732.5 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.44	-54.60	-13.00	-41.60	1.31 H	151	58.36	-112.96
2	179.38	-58.29	-13.00	-45.29	1.16 H	322	51.14	-109.43
3	329.73	-55.97	-13.00	-42.97	1.17 H	114	50.17	-106.14
4	626.55	-56.78	-13.00	-43.78	1.01 H	129	41.27	-98.05
5	826.37	-55.00	-13.00	-42.00	1.32 H	201	39.39	-94.39
6	956.35	-53.73	-13.00	-40.73	1.05 H	43	38.76	-92.49

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

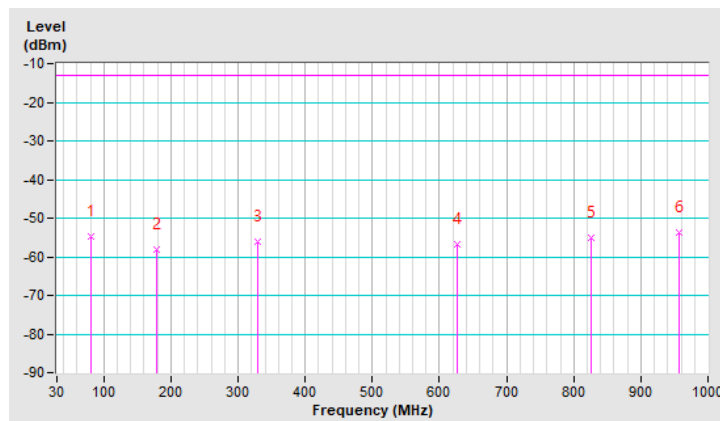


<b>RF Mode</b>	TX LTE Band IV-20MHz	<b>Channel</b>	CH 20175 : 1732.5 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	80.44	-53.82	-13.00	-40.82	1.14 V	185	59.14	-112.96
2	217.21	-61.61	-13.00	-48.61	1.04 V	157	49.92	-111.53
3	495.60	-63.21	-13.00	-50.21	1.24 V	338	38.22	-101.43
4	625.58	-59.17	-13.00	-46.17	1.07 V	151	38.92	-98.09
5	811.82	-56.71	-13.00	-43.71	1.36 V	190	38.04	-94.75
6	974.78	-56.22	-13.00	-43.22	1.03 V	192	35.96	-92.18

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

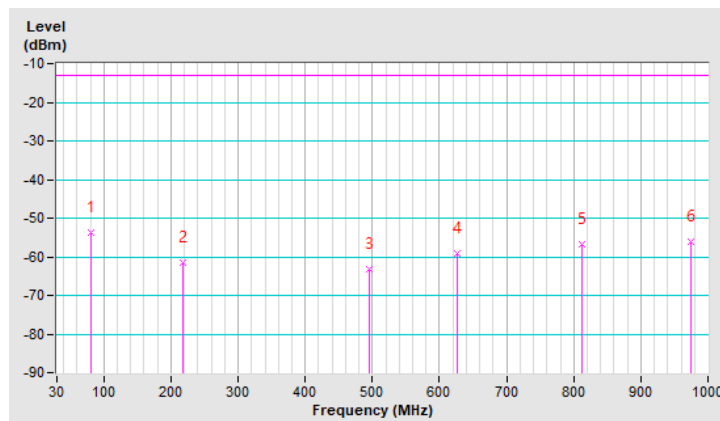


<b>RF Mode</b>	TX LTE Band XII-10MHz	<b>Channel</b>	CH 23060 : 704 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	89.17	-47.13	-13.00	-34.13	1.17 H	333	68.65	-115.78
2	<b>237.58</b>	<b>-45.40</b>	<b>-13.00</b>	<b>-32.40</b>	<b>1.32 H</b>	<b>168</b>	<b>66.93</b>	<b>-112.33</b>
3	432.55	-47.52	-13.00	-34.52	1.11 H	287	57.82	-105.34
4	628.49	-54.90	-13.00	-41.90	1.24 H	341	45.25	-100.15
5	863.23	-51.99	-13.00	-38.99	1.39 H	56	44.29	-96.28
6	941.80	-52.56	-13.00	-39.56	1.29 H	97	42.25	-94.81

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

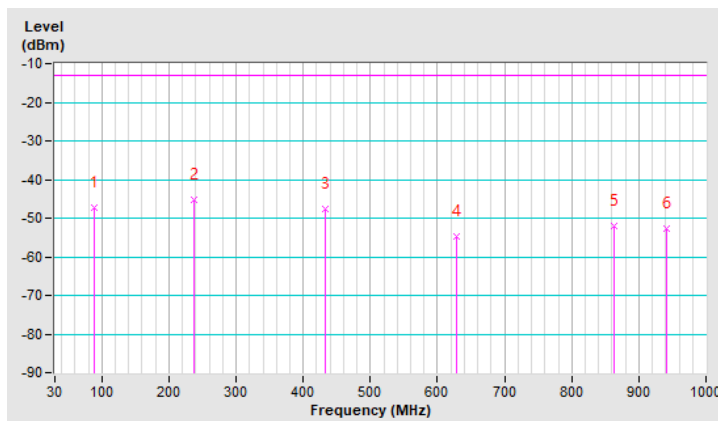


<b>RF Mode</b>	TX LTE Band XII-10MHz	<b>Channel</b>	CH 23060 : 704 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.86	-52.16	-13.00	-39.16	1.27 V	105	59.50	-111.66
2	241.46	-45.61	-13.00	-32.61	1.34 V	151	66.50	-112.11
3	380.17	-51.86	-13.00	-38.86	1.24 V	141	55.10	-106.96
4	598.42	-53.39	-13.00	-40.39	1.03 V	133	47.58	-100.97
5	765.26	-56.19	-13.00	-43.19	1.09 V	103	41.50	-97.69
6	935.98	-51.83	-13.00	-38.83	1.26 V	343	43.34	-95.17

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

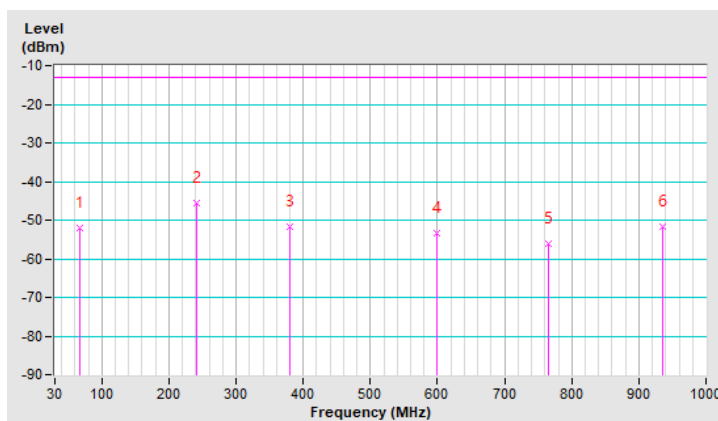


<b>RF Mode</b>	TX LTE Band XIII-10MHz	<b>Channel</b>	CH 23230 : 782 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	48.43	-56.37	-13.00	-43.37	1.25 H	131	53.62	-109.99
2	149.31	-68.31	-13.00	-55.31	1.39 H	291	41.27	-109.58
3	309.36	-68.25	-13.00	-55.25	1.12 H	199	40.79	-109.04
4	514.03	-62.74	-13.00	-49.74	1.01 H	322	40.52	-103.26
5	727.43	-57.66	-13.00	-44.66	1.20 H	306	41.10	-98.76
6	938.89	-55.14	-13.00	-42.14	1.22 H	141	39.80	-94.94

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

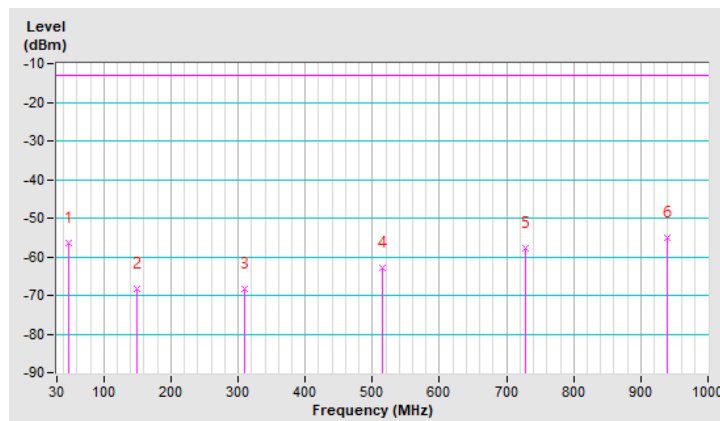




<b>RF Mode</b>	TX LTE Band XIII-10MHz	<b>Channel</b>	CH 23230 : 782 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	41.64	-55.46	-13.00	-42.46	1.15 V	61	54.92	-110.38
2	163.86	-57.96	-13.00	-44.96	1.10 V	4	52.18	-110.14
3	432.55	-60.15	-13.00	-47.15	1.29 V	67	45.19	-105.34
4	645.95	-58.88	-13.00	-45.88	1.00 V	322	41.05	-99.93
5	773.99	-56.12	-13.00	-43.12	1.26 V	344	41.38	-97.50
6	936.95	-53.55	-13.00	-40.55	1.21 V	211	41.54	-95.09

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

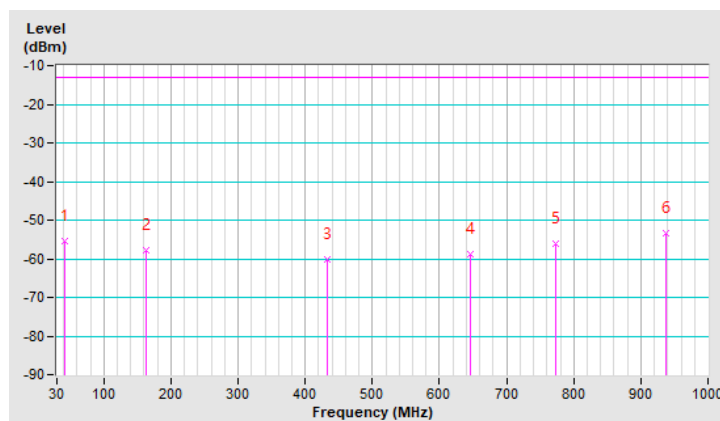


<b>RF Mode</b>	TX LTE Band 66-20MHz	<b>Channel</b>	CH 132572 : 1770.0 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	51.34	-58.02	-13.00	-45.02	1.34 H	330	49.85	-107.87
2	224.00	-55.30	-13.00	-42.30	1.05 H	195	56.45	-111.75
3	453.89	-61.14	-13.00	-48.14	1.17 H	240	41.34	-102.48
4	702.21	-56.02	-13.00	-43.02	1.18 H	127	41.10	-97.12
5	852.56	-52.86	-13.00	-39.86	1.00 H	107	41.36	-94.22
6	957.32	-52.05	-13.00	-39.05	1.36 H	51	40.43	-92.48

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

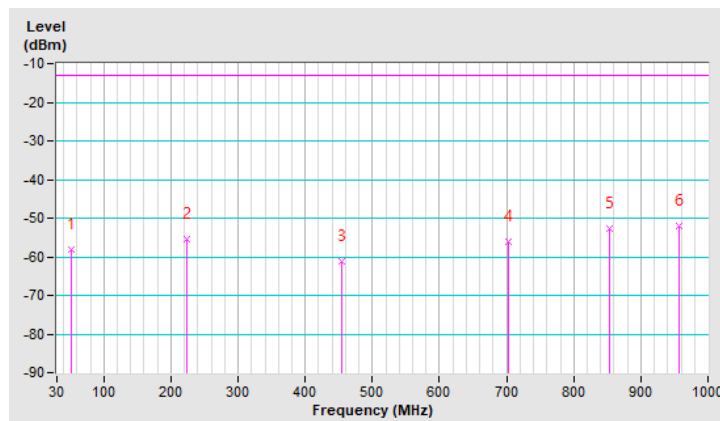


<b>RF Mode</b>	TX LTE Band 66-20MHz	<b>Channel</b>	CH 132572 : 1770.0 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.44	-51.85	-13.00	-38.85	1.10 V	57	61.11	-112.96
2	223.03	-58.95	-13.00	-45.95	1.18 V	168	52.76	-111.71
3	366.59	-53.11	-13.00	-40.11	1.41 V	345	52.13	-105.24
4	547.01	-59.36	-13.00	-46.36	1.05 V	307	41.13	-100.49
5	758.47	-55.10	-13.00	-42.10	1.22 V	294	40.68	-95.78
6	942.77	-52.55	-13.00	-39.55	1.00 V	41	40.08	-92.63

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

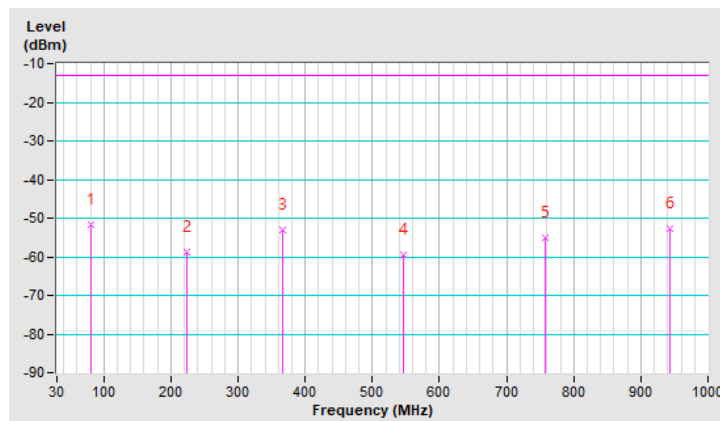

### Above 1GHz

<b>RF Mode</b>	TX WCDMA Band IV	<b>Channel</b>	CH 1312 : 1712.4 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3424.80	-55.38	-13.00	-42.38	1.36 H	228	61.09	-116.47
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3424.80	-53.68	-13.00	-40.68	2.09 V	333	62.79	-116.47

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX WCDMA Band IV	<b>Channel</b>	CH 1413 : 1732.6 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.20	-53.21	-13.00	-40.21	1.63 H	127	63.11	-116.32
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.20	-48.97	-13.00	-35.97	1.78 V	55	67.35	-116.32

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX WCDMA Band IV	<b>Channel</b>	CH 1513 : 1752.6 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

<b>Antenna Polarity &amp; Test Distance : Horizontal at 3 m</b>								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	3505.20	-54.89	-13.00	-41.89	2.09 H	323	61.17	-116.06
<b>Antenna Polarity &amp; Test Distance : Vertical at 3 m</b>								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	3505.20	-52.18	-13.00	-39.18	1.41 V	202	63.88	-116.06

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band IV-1.4MHz	<b>Channel</b>	CH 19957 : 1710.7 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-55.05	-13.00	-42.05	1.23 H	22	61.42	-116.47

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-53.45	-13.00	-40.45	2.06 V	104	63.02	-116.47

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band IV-1.4MHz	<b>Channel</b>	CH 20175 : 1732.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-52.74	-13.00	-39.74	2.39 H	137	63.58	-116.32

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-48.55	-13.00	-35.55	1.52 V	232	67.77	-116.32

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band IV-1.4MHz	<b>Channel</b>	CH 20393 : 1754.3 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-54.59	-13.00	-41.59	1.15 H	327	61.45	-116.04

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-51.86	-13.00	-38.86	1.97 V	104	64.18	-116.04

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band IV-5MHz	<b>Channel</b>	CH 19975 : 1712.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-54.74	-13.00	-41.74	1.63 H	207	61.72	-116.46

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-52.99	-13.00	-39.99	1.88 V	23	63.47	-116.46

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band IV-5MHz	<b>Channel</b>	CH 20175 : 1732.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-52.51	-13.00	-39.51	1.04 H	297	63.81	-116.32
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-48.31	-13.00	-35.31	1.85 V	231	68.01	-116.32

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band IV-5MHz	<b>Channel</b>	CH 20375 : 1752.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-54.24	-13.00	-41.24	3.15 H	45	61.82	-116.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-51.53	-13.00	-38.53	2.43 V	256	64.53	-116.06

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	TX LTE Band IV-20MHz	<b>Channel</b>	CH 20050 : 1720 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-54.49	-13.00	-41.49	3.52 H	311	61.95	-116.44

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-52.80	-13.00	-39.80	2.43 V	267	63.64	-116.44

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band IV-20MHz	<b>Channel</b>	CH 20175 : 1732.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-52.29	-13.00	-39.29	3.26 H	39	64.03	-116.32

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-48.09	-13.00	-35.09	2.09 V	249	68.23	-116.32

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band IV-20MHz	<b>Channel</b>	CH 20300 : 1745 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

<b>Antenna Polarity &amp; Test Distance : Horizontal at 3 m</b>								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-54.16	-13.00	-41.16	3.27 H	20	62.00	-116.16
<b>Antenna Polarity &amp; Test Distance : Vertical at 3 m</b>								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-51.45	-13.00	-38.45	2.47 V	253	64.71	-116.16

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-1.4MHz	<b>Channel</b>	CH 23017 : 699.7 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-61.50	-13.00	-48.50	2.04 H	54	59.57	-121.07
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-59.31	-13.00	-46.31	1.54 V	223	61.76	-121.07

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-1.4MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-61.39	-13.00	-48.39	1.21 H	333	59.75	-121.14
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.91	-13.00	-46.91	2.03 V	154	61.23	-121.14

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-1.4MHz	<b>Channel</b>	CH 23173 : 715.3 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-61.18	-13.00	-48.18	2.89 H	204	60.04	-121.22
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-60.08	-13.00	-47.08	1.04 V	323	61.14	-121.22

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-5MHz	<b>Channel</b>	CH 23035 : 701.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-61.19	-13.00	-48.19	1.52 H	354	59.89	-121.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-58.95	-13.00	-45.95	2.34 V	222	62.13	-121.08

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-5MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-61.12	-13.00	-48.12	1.97 H	220	60.02	-121.14
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.63	-13.00	-46.63	2.14 V	325	61.51	-121.14

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-5MHz	<b>Channel</b>	CH 23155 : 713.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-60.89	-13.00	-47.89	1.47 H	114	60.31	-121.20
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-59.77	-13.00	-46.77	1.56 V	253	61.43	-121.20

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-10MHz	<b>Channel</b>	CH 23060 : 704 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-60.95	-13.00	-47.95	1.62 H	243	60.16	-121.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-58.77	-13.00	-45.77	2.63 V	171	62.34	-121.11

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-10MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-60.91	-13.00	-47.91	1.37 H	223	60.23	-121.14
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.42	-13.00	-46.42	2.63 V	167	61.72	-121.14

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XII-10MHz	<b>Channel</b>	CH 23130 : 711 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1422.00	-60.64	-13.00	-47.64	2.34 H	159	60.54	-121.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1422.00	-59.50	-13.00	-46.50	1.45 V	223	61.68	-121.18

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XIII-5MHz	<b>Channel</b>	CH 23205 : 779.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1559.00	-54.96	-40.00	-14.96	1.24 H	112	64.86	-119.82
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1559.00	-51.94	-40.00	-11.94	1.13 V	146	67.88	-119.82

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XIII-5MHz	<b>Channel</b>	CH 23230 : 782 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-54.87	-40.00	-14.87	1.72 H	317	64.97	-119.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-52.58	-40.00	-12.58	1.72 V	317	67.26	-119.84

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	TX LTE Band XIII-5MHz	<b>Channel</b>	CH 23255 : 784.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1569.00	-55.04	-40.00	-15.04	3.93 H	215	64.84	-119.88

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1569.00	-52.40	-40.00	-12.40	1.17 V	318	67.48	-119.88

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band XIII-10MHz	<b>Channel</b>	CH 23230 : 782 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-54.91	-40.00	-14.91	1.02 H	258	64.93	-119.84

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-51.79	-40.00	-11.79	1.37 V	11	68.05	-119.84

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-1.4MHz	<b>Channel</b>	CH 131979 : 1710.7 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.14	-53.51	-13.00	-40.51	3.22 H	111	62.96	-116.47
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.14	-52.19	-13.00	-39.19	1.42 V	25	64.28	-116.47

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-1.4MHz	<b>Channel</b>	CH 132322 : 1745.0 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-53.15	-13.00	-40.15	2.82 H	106	63.01	-116.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-51.75	-13.00	-38.75	1.15 V	23	64.41	-116.16

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-1.4MHz	<b>Channel</b>	CH 132665 : 1779.3 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-51.36	-13.00	-38.36	3.71 H	209	64.51	-115.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-50.45	-13.00	-37.45	2.04 V	337	65.42	-115.87

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-5MHz	<b>Channel</b>	CH 131997 : 1712.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-53.15	-13.00	-40.15	2.87 H	264	63.31	-116.46
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-51.85	-13.00	-38.85	1.35 V	297	64.61	-116.46

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-5MHz	<b>Channel</b>	CH 132322 : 1745.0 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-52.84	-13.00	-39.84	3.25 H	201	63.32	-116.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-51.41	-13.00	-38.41	1.87 V	102	64.75	-116.16

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-5MHz	<b>Channel</b>	CH 132647 : 1777.5 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-50.91	-13.00	-37.91	2.87 H	112	64.97	-115.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-50.29	-13.00	-37.29	1.55 V	220	65.59	-115.88

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-20MHz	<b>Channel</b>	CH 132072 : 1720.0 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-52.92	-13.00	-39.92	2.99 H	311	63.52	-116.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-51.59	-13.00	-38.59	2.30 V	258	64.85	-116.44

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-20MHz	<b>Channel</b>	CH 132322 : 1745.0 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-52.62	-13.00	-39.62	3.11 H	305	63.54	-116.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-51.17	-13.00	-38.17	2.31 V	267	64.99	-116.16

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	TX LTE Band 66-20MHz	<b>Channel</b>	CH 132575 : 1770.0 MHz
<b>Frequency Range</b>	1GMHz ~ 18GHz		

<b>Antenna Polarity &amp; Test Distance : Horizontal at 3 m</b>								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-51.19	-13.00	-38.19	3.23 H	311	64.74	-115.93
<b>Antenna Polarity &amp; Test Distance : Vertical at 3 m</b>								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-50.11	-13.00	-37.11	2.24 V	238	65.82	-115.93

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---