

October 09, 2023

Trackonomy Systems
214 Devcon Drive
San Jose, CA 95112

Dear Saurabh Sanghai,

Enclosed is the Wireless test report for compliance testing of the Trackonomy Systems, Multifunctional IoT Platform Sensor as tested to the requirements of Title 47 of the CFR, Part 15 Subpart C, RSS 247 for Intentional Radiators.

Thank you for using the services of Eurofins Electrical and Electronic Testing NA, Inc. If you have any questions regarding these results or if Eurofins Electrical and Electronic Testing NA, Inc. can be of further service to you, please feel free to contact me.

Gary Chou

Documentation Department
Eurofins Electrical and Electronic Testing NA, Inc.

Reference: WIR128169-Track_FCC_ISED_BLE



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins Electrical and Electronic Testing NA, Inc. While use of the A2LA logo in this report reflects Eurofins Electrical and Electronic Testing NA, Inc. accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

FCC/ ISED Test Report

Applicant name: Trackonomy Systems

Product: Multifunctional IoT Platform Sensor

Report: WIR128169-Track_FCC_ISED_BLE

Applicant Address:

**214 Devcon Drive
San Jose, CA 95112**

Manufacturer Address:

**214 Devcon Drive
San Jose, CA 95112**

**Prepared By:
Eurofins Electrical and Electronic Testing NA, Inc.
3162 Belick St.
Santa Clara CA, 95054**

FCC/ ISED Test Report

Applicant name: Trackonomy Systems

Product: Multifunctional IoT Platform Sensor

Standard

47 CFR FCC Part 15, Subpart C (Section 15.247)

558074 D01 15.247 Meas Guidance v05r02

RSS 247 Issue2, February 2017

RSS Gen Issue5, March 2019

ANSI C63.10: 2013

Richard Dollente

Richard Dollente

Test Engineer, Wireless Laboratory

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements FCC Rules under normal use and maintenance.

Gary Chou

Gary Chou

Wireless Engineering Manager, Wireless Laboratory

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	October 09, 2023	Initial Issue.

Table of Contents

I.	Executive Summary	6
	A. Executive Summary	6
II.	Equipment Information	7
	A. Overview.....	7
	B. References.....	9
	C. Test Site	9
	D. Measurement Uncertainty	10
	E. Modifications	10
	Modifications to EUT	10
	Modifications to Test Standard.....	10
	F. Disposition of EUT	10
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	11
	A. Radiated Emission and Bandage Measurement	11
	B. Conducted Emission Measurement.....	26
	C. 6dB Bandwidth Measurement & 99% Bandwidth Measurement	29
	D. Conducted Output Power Measurement	35
	E. Power Spectral Density Measurement	37
	F. Conducted Out of Band Emission Measurement	40

I. Executive Summary

A. Executive Summary

47 CFR FCC Part 15, Subpart C (SECTION 15.247) RSS 247 Issue2, RSS Gen Issue5				
FCC/ IC Cluse	ISED	Test Item	Result	Remarks
15.207	RSS Gen 8.8	AC Power Conducted Emission	N/A	Powered by battery so test is not required.
15.205 & 15.209 & 15.247(d)	RSS Gen 8.8	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS 247 5.5C	6dB bandwidth & 99% bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS 247 5.2.1 RSS Gen 6.7	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	RSS 247 5.4.4	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	RSS 247 5.2.2	Antenna Requirement	PASS	PCB antenna meet the requirement.

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

II. Equipment Information

A. Overview

EUT Summary Table

Product:	Multifunctional IoT Platform Sensor	
Brand:	Trackonomy Systems	
Model(s) Tested:	FBO-2001	
Series Model:	N/A	
Sample Status:	Original	
EUT Specifications:	Primary Power:	3.6 Vdc battery powered
	Voltage Frequency:	N/A
	Technology / Type of Modulations:	BLUETOOTH LE: GFSK
	Operating Frequency :	2.402 ~ 2.480GHz
	FCC ID:	2AXA8-FBO-2001
	ISED ID:	27299-FBO2001
	Antenna Manufacturer / Model	Molex/ 146180300
	Antenna Type:	Flexible PCB Antenna
	Antenna connector:	U.FL
	Antenna Gain	Antenna Gain: 3 dBi
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 20.3° C	
	Relative Humidity: 47.5%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Richard Dollente	
Issue Date(s):	October 09, 2023	

NOTE:

FBO-2001 is a multifunctional IoT Platform sensor device for multimodal, multi radio asset tracking and situational awareness applications. The device is available in two options - with and without the external temperature probe accessory. Both the options are covered under the scope of this report.

The following modules can be chosen to be configured in the EUT.

	Model No.	FCC ID	Note
-	-	-	-
-	-	-	-

FCC/IC RF Testing Units Setting

Model	Hardware (FW) Rev.	Firmware (FW) Rev.	FW operation verification and Instruction
FBO-2001	Nominal HW V2	Nominal FW V2	Verify by Spectrum Analyzer & Laptop

DESCRIPTION OF TEST MODES

Power Setting :

Channel	Frequency(MHz)	Power Setting
0	2402	default
19	2440	default
39	2480	default

40 channels are provided for Bluetooth LE:

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

B. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
B	wideband radio communication tester	ROHDE& SCHARZ	CMW500	1201.0002K50	-	Bluetooth Tester

Note: (Describe the outline of a simulator, if used for the tests, as a note under the table.)

Insert Cable Connections to/from EUT provided by test team.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
	-	-	-	-	0	-

Note: The core(s) is(are) originally attached to the cable(s).

General Description of Applied Standards

C. References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- 47 CFR FCC Part 15, Subpart C (Section 15.247)
- 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10:2013
- RSS 247 Issue2
- RSS Gen Issue5

D. Test Site

All testing was performed at Eurofins Electrical and Electronic Testing NA, Inc., 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Eurofins Electrical and Electronic Testing NA, Inc. has been accredited by the American Association for Laboratory Accreditation (A2LA) (Certificate #: 0591.02) in accordance with ISO/IEC 17025:2017.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

E. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.32 dB	2	95%
RF Power Conducted Spurious Emissions	±2.25 dB	2	95%
RF Power Radiated Emissions	±3.01 dB	2	95%

Uncertainty Calculations Summary

F. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

G. Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electromagnetic Compatibility Lab for testing was returned to Trackonomy System upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Radiated Emission and Bandage Measurement

Limits of Radiated Emission and Bandage Measurement:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:


Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Test Procedures:


The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz.

Test Setup


For Radiated Emission Below 30MHz

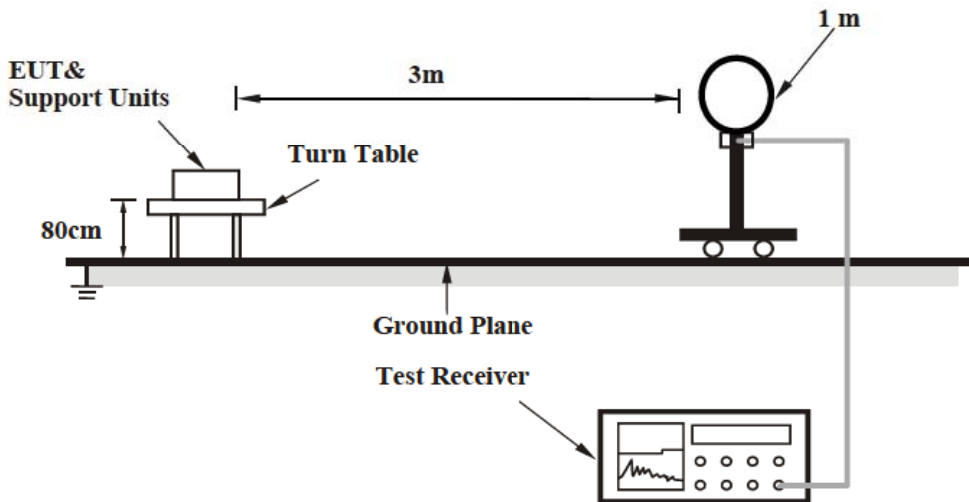

For Radiated emission 30 MHz to 1GHz

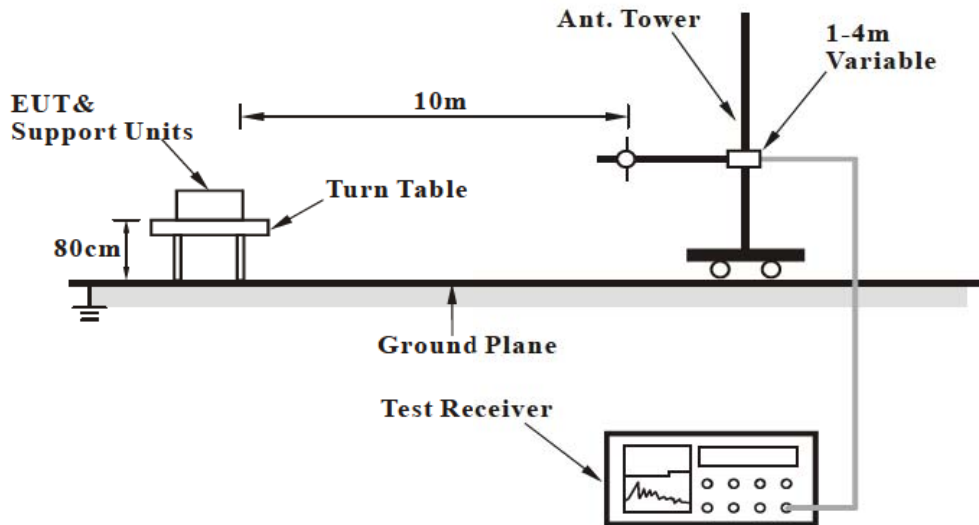

For Radiated emission 1GHz to 40GHz

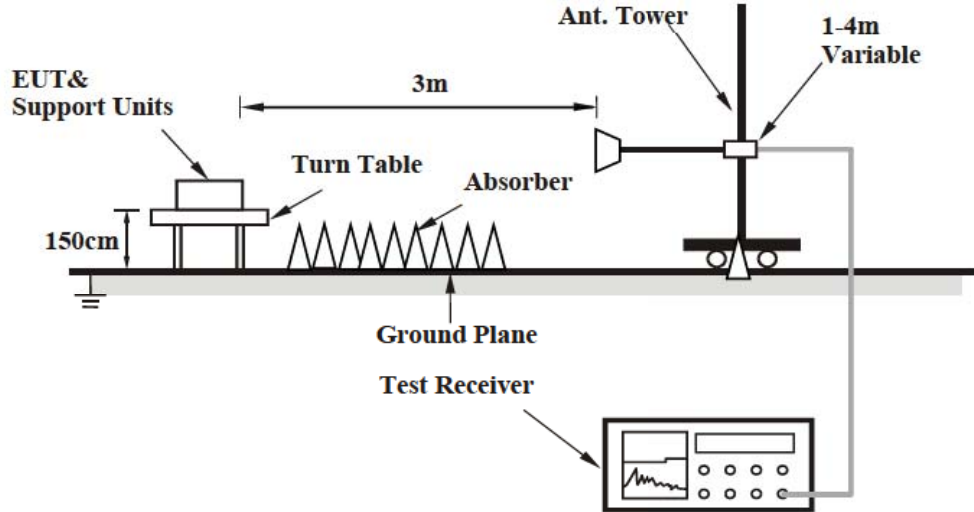

Test Results: The EUT was tested is **compliant** with Radiated Spurious Emissions Requirements.

Test Equipment List

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/01/2022	11/01/2023
1S2399	Turntable Controller	SUNOL SCIENCE	SC99V	Not Required	Not Required
1S2486	5 Meter Chamber Control Room	Panashield	5 Meter Control Room	Not Required	Not Required
1S3826	Horn Antenna	ETS-LINDGREN	3117	04/06/2023	04/06/2025
1S4802	Preamplifier	EMC Instrument	EMC118A45SE	Note 1	Note 1
1S2668	Preamplifier	Sonoma Instrument	310N	Note 1	Note 1
1S2600	Antenna	Sunol Sciences Corp	JB3	04/ 11/ 2023	04/ 11/ 2025
1S3983	Loop Antenna	ETS-LINDGREN	6512	10/ 14 /2021	10/ 14 /2023
Note 1: Verified by calibrated instrumentation at the time of testing					

Test Engineer: Richard Dollente


Test Date(s): 09/07/2023

Test Data

Radiated Emissions (30 MHz~1000 MHz)

EUT Test Condition		Measurement Detail	
Input Power	3.6Vdc	Frequency Range	30MHz-1GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#1 - 30MHz-1GHz (Vertical)

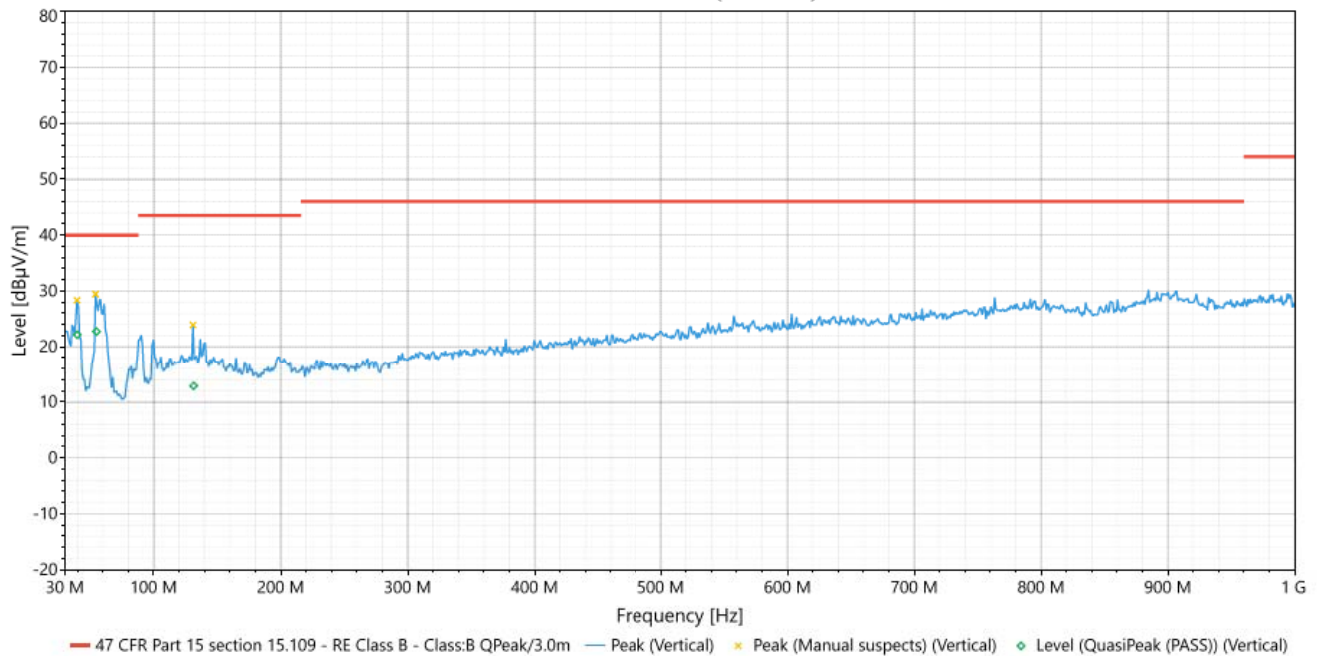

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	39.8	Vertical	22.177	40	-17.823	1.2	263	-9.78	Pass
2	54.92	Vertical	22.755	40	-17.245	2.62	231	-14.39	Pass
3	131.45	Vertical	12.899	43.5	-30.601	2.21	203	-7.3	Pass


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.

4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.6Vdc	Frequency Range	30MHz-1GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#2 - 30MHz-1GHz (Horizontal)

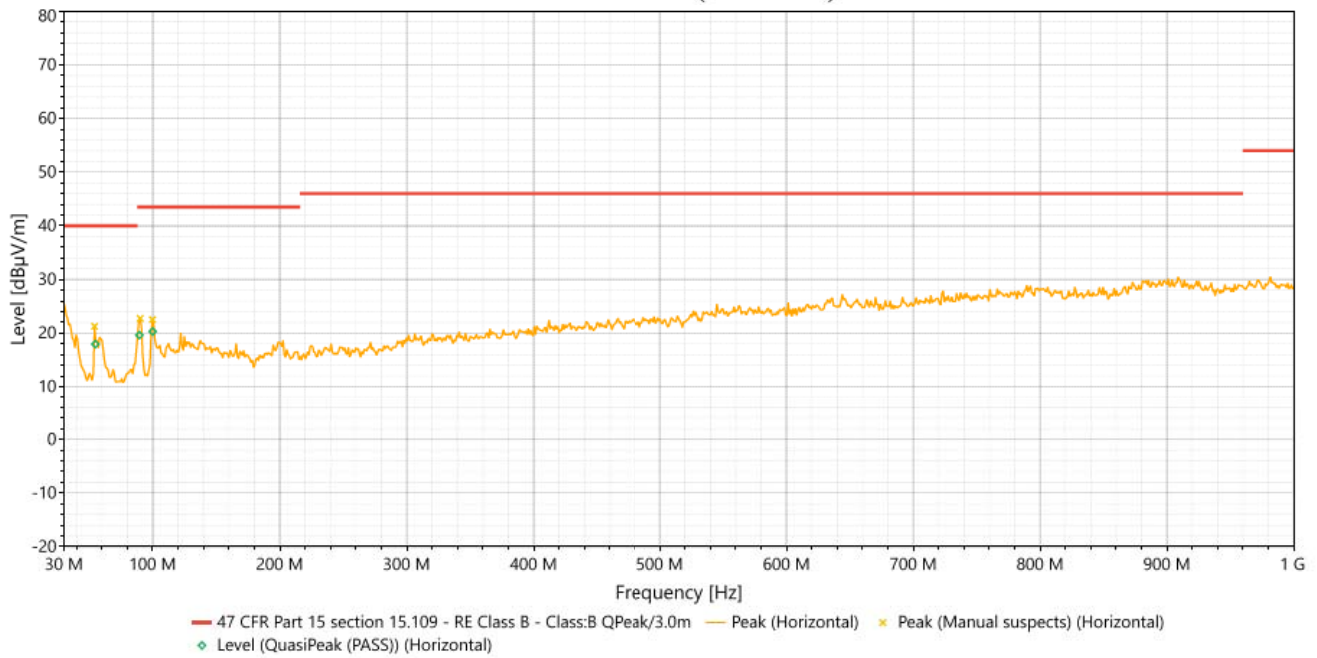

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	54.95	Horizontal	17.943	40	-22.057	2.62	286	-13.89	Pass
2	89.55	Horizontal	19.603	43.5	-23.897	3.27	133	-13.96	Pass
3	99.95	Horizontal	20.278	43.5	-23.222	2.92	291	-10.73	Pass


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.


Radiated Emissions (Above 1GHz)

EUT Test Condition		Measurement Detail	
Input Power	3.6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2402 MHz		

#1 - Vertical (Vertical)

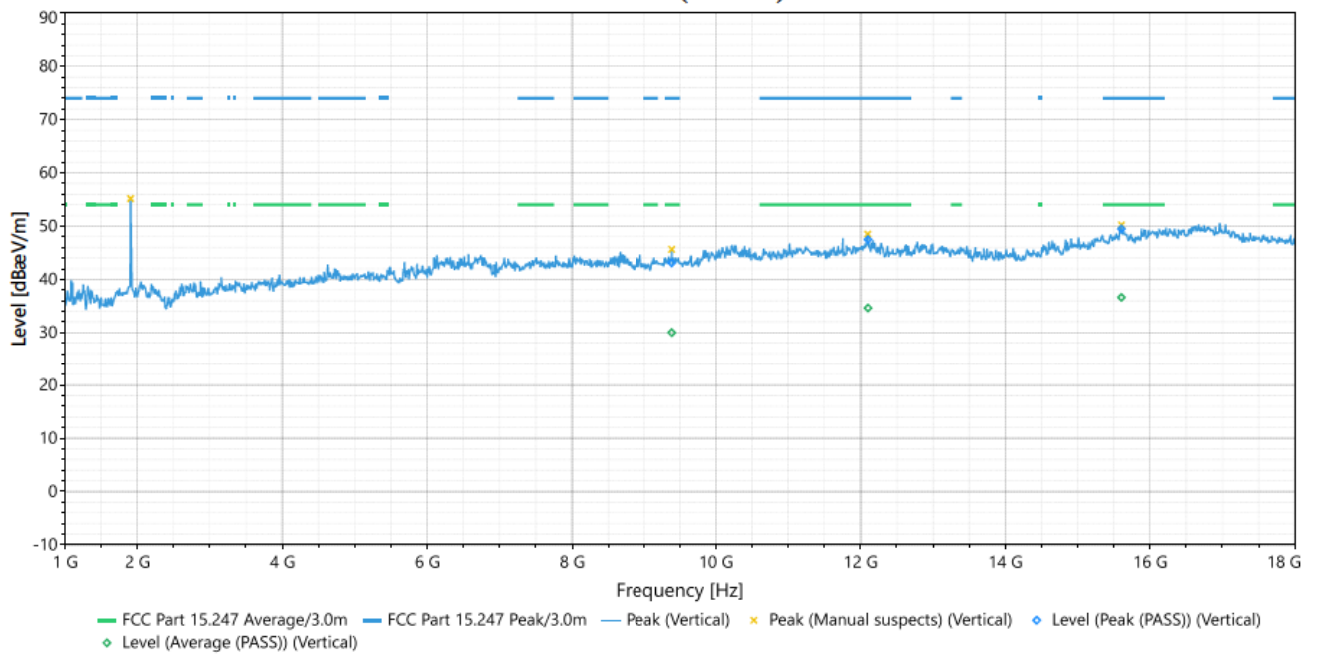

#1 - 2.31GHz-2.39GHz (Vertical)

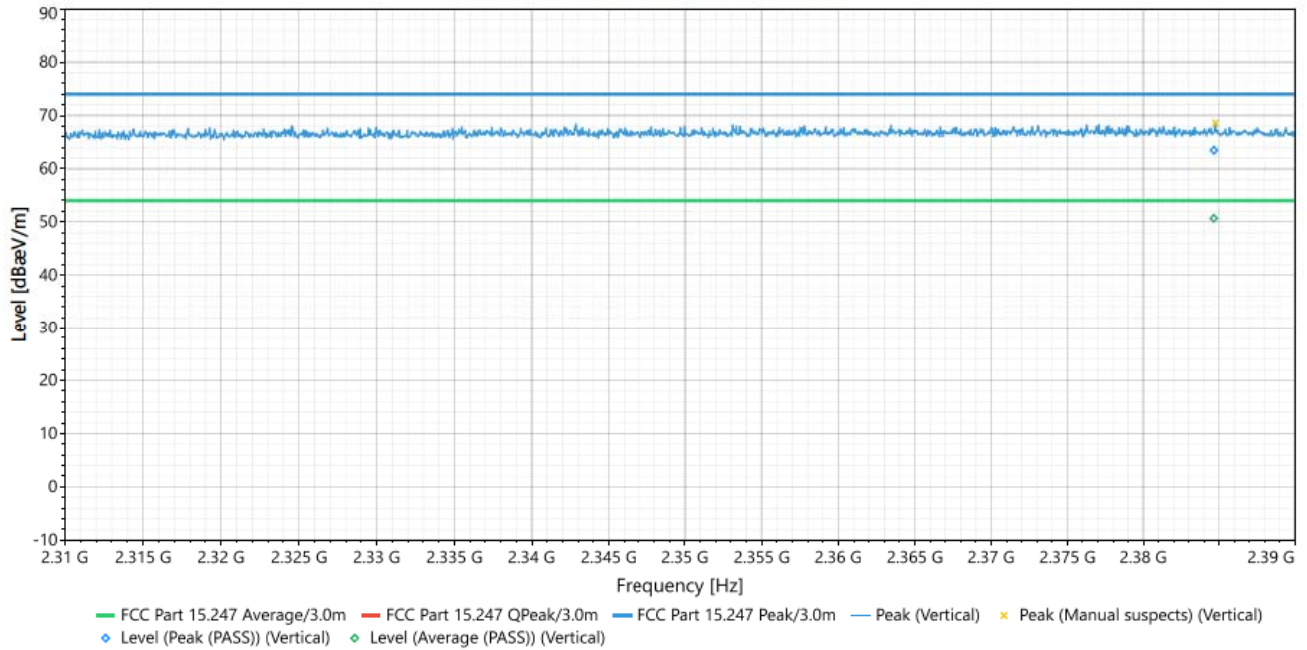


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1908.99	Vertical	55.167	NaN	NaN	NaN	2.5	0.87	Peak
2	9389.53	Vertical	43.067	74	-30.933	3.1	229	5.63	Peak (PASS)
3	9389.53	Vertical	29.981	54	-24.019	3.1	229	5.63	Average (PASS)
4	12103.07	Vertical	47.473	74	-26.527	3.11	273	7.54	Peak (PASS)
5	12103.07	Vertical	34.619	54	-19.381	3.11	273	7.54	Average (PASS)
6	15603.87	Vertical	49.476	74	-24.524	3.1	140	8.21	Peak (PASS)
7	15603.87	Vertical	36.618	54	-17.382	3.1	140	8.21	Average (PASS)
8	2384.652	Vertical	63.445	74	-10.555	2.12	163	38.73	Peak (PASS)
9	2384.652	Vertical	50.648	54	-3.352	2.12	163	38.73	Average (PASS)

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2402 MHz		

#2 - Horizontal (Horizontal)

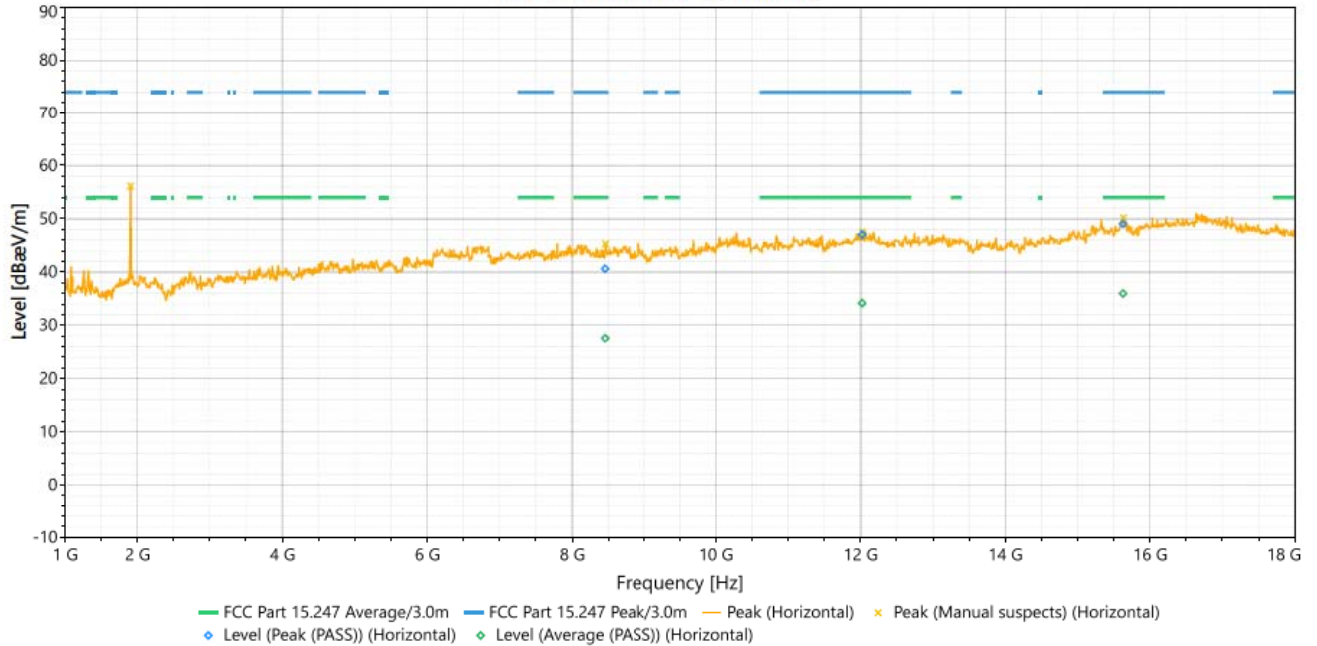

#2 - 2.31GHz-2.39GHz (Horizontal)

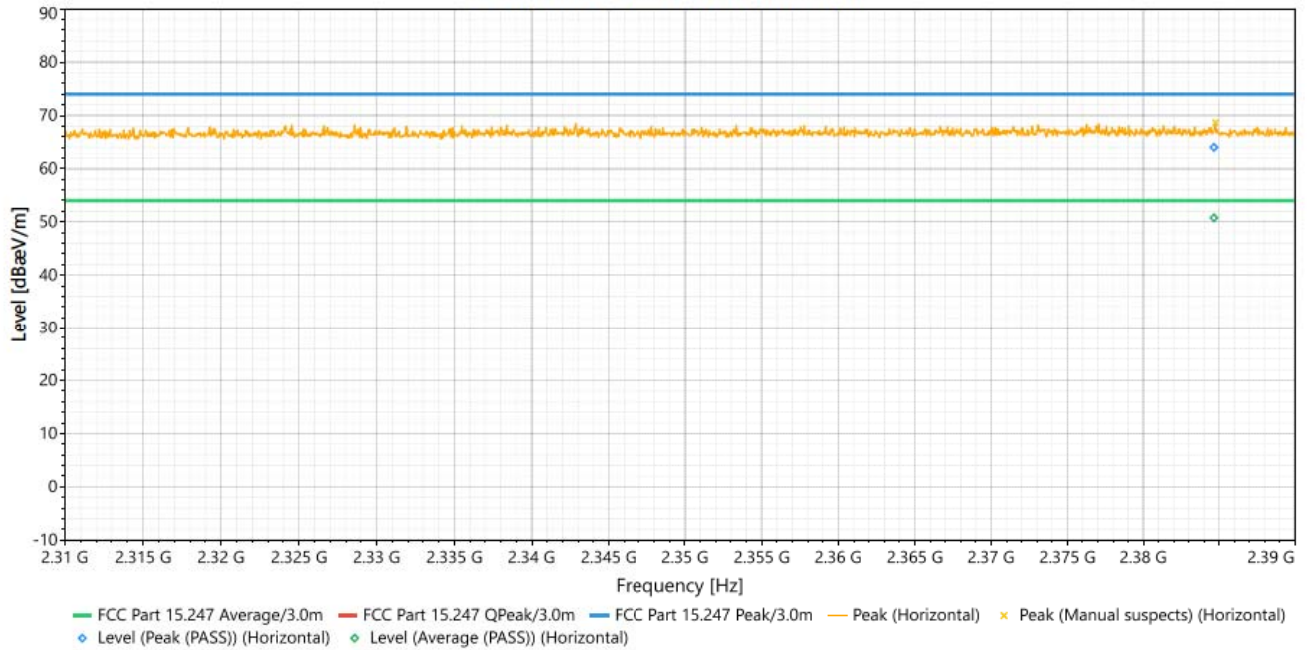


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1909.5	Horizontal	56.098	NaN	NaN	NaN	2.5	0.9	Peak
2	8457.5	Horizontal	40.612	74	-33.388	2.6	261	5.64	Peak (PASS)
3	8457.5	Horizontal	27.572	54	-26.428	2.6	261	5.64	Average (PASS)
4	12021.65	Horizontal	47.028	74	-26.972	3.5	62	7.52	Peak (PASS)
5	12021.65	Horizontal	34.152	54	-19.848	3.5	62	7.52	Average (PASS)
6	15625.57	Horizontal	49.016	74	-24.984	3.28	167	8.17	Peak (PASS)
7	15625.57	Horizontal	35.979	54	-18.021	3.28	167	8.17	Average (PASS)
8	8457.5	Horizontal	40.612	74	-33.388	2.6	261	5.64	Peak (PASS)
9	8457.5	Horizontal	27.572	54	-26.428	2.6	261	5.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#1 - Vertical (Vertical)

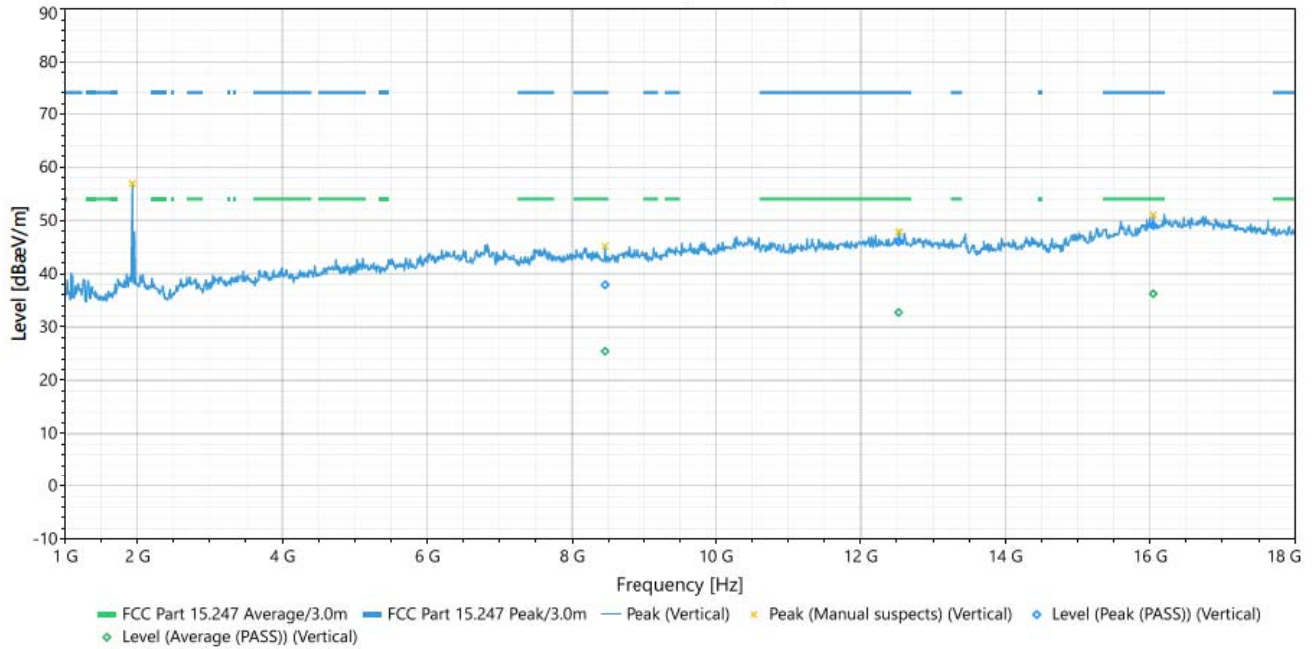


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1934.49	Vertical	56.942	NaN	NaN	NaN	2	0.97	Peak
2	8455.77	Vertical	37.924	74	-36.076	1.4	296	5.65	Peak (PASS)
3	8455.77	Vertical	25.426	54	-28.574	1.4	296	5.65	Average (PASS)
4	12526.85	Vertical	45.981	74	-28.019	3.1	303	7.52	Average (PASS)
5	12526.85	Vertical	32.721	54	-21.279	3.1	303	7.52	Peak (PASS)
6	16044.73	Vertical	49.079	74	-24.921	3.2	351	8.53	Average (PASS)
7	16044.73	Vertical	36.259	54	-17.741	3.2	351	8.53	Peak (PASS)

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#2 - Horizontal (Horizontal)

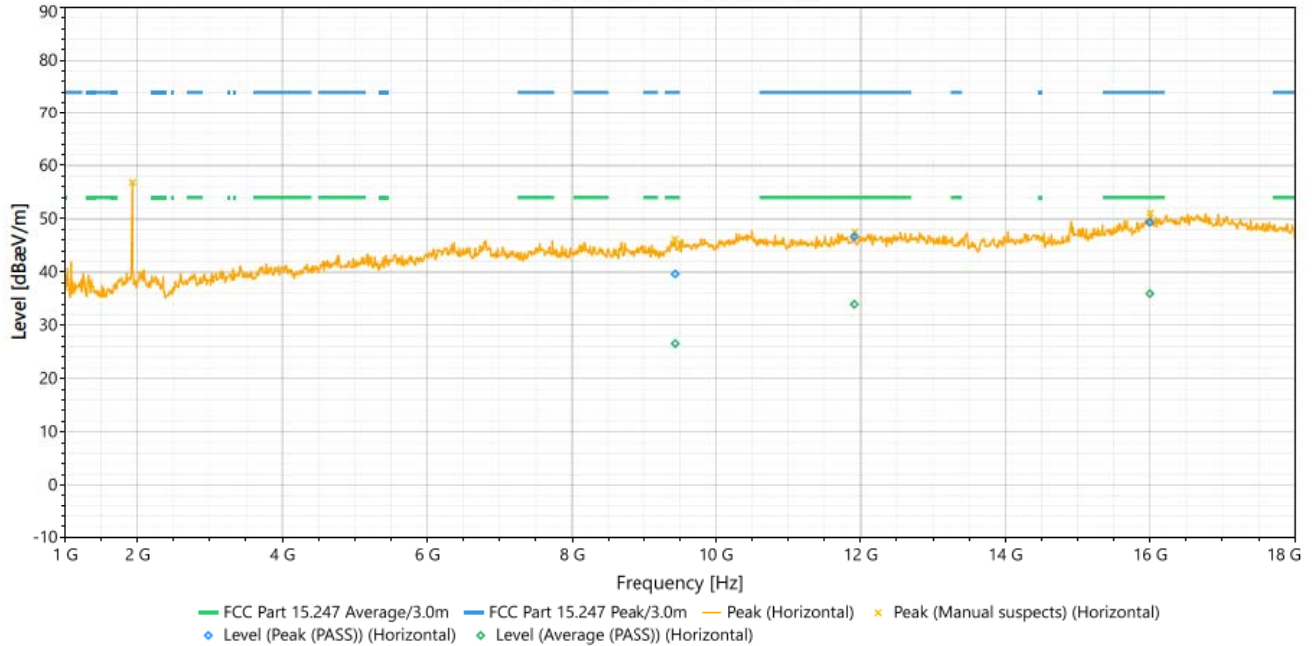


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1934.49	Horizontal	56.833	NaN	NaN	NaN	1.5	1.04	Peak
2	9438.8	Horizontal	39.643	74	-34.357	2.6	334	5.73	Peak (PASS)
3	9438.8	Horizontal	26.565	54	-27.435	2.6	334	5.73	Average (PASS)
4	11914.53	Horizontal	46.617	74	-27.383	3.5	0	7.45	Average (PASS)
5	11914.53	Horizontal	33.938	54	-20.062	3.5	0	7.45	Peak (PASS)
6	15996.08	Horizontal	49.329	74	-24.671	3.5	12	8.53	Average (PASS)
7	15996.08	Horizontal	35.922	54	-18.078	3.5	12	8.53	Peak (PASS)

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2480 MHz		

#1 - Vertical (Vertical)

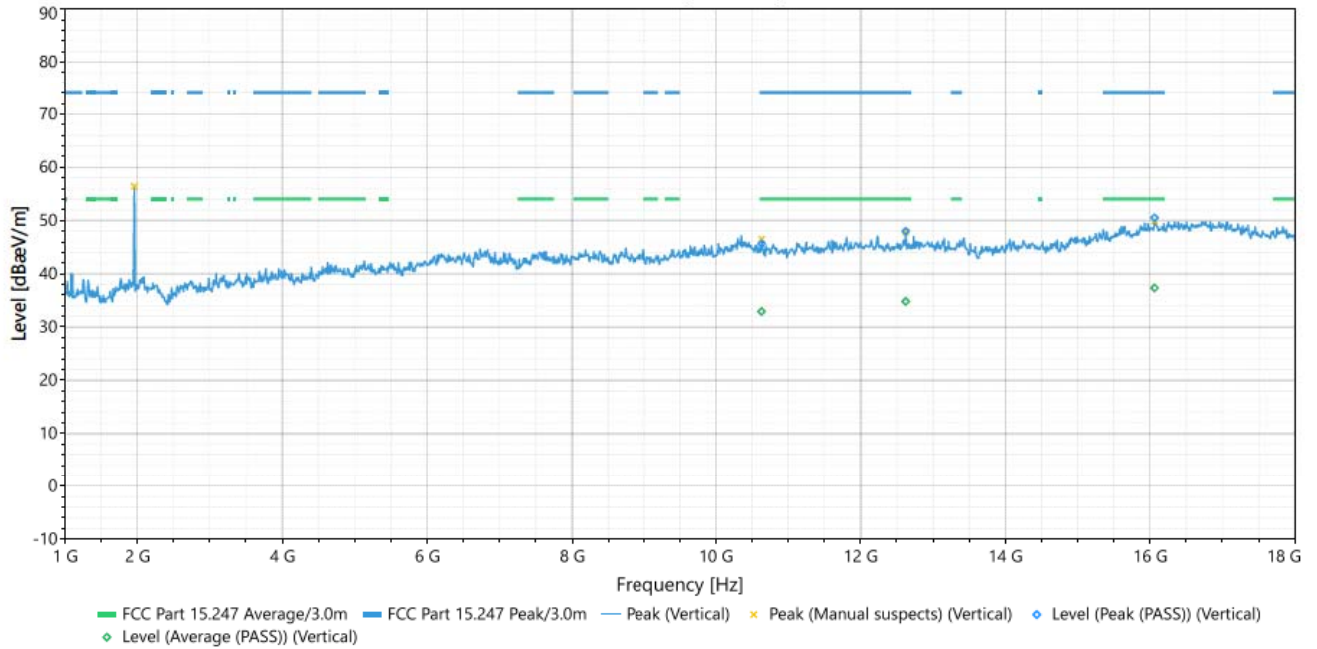

#1 - 2.4835GHz-2.5GHz (Vertical)

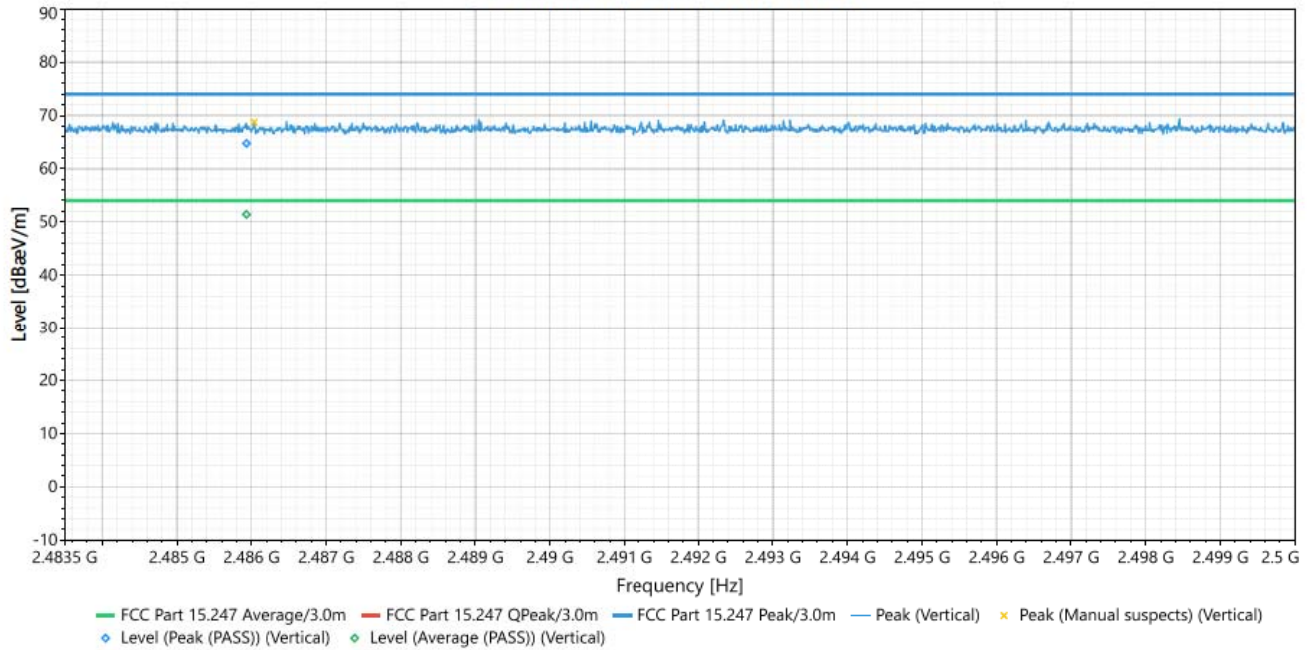


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1960.5	Vertical	56.421	NaN	NaN	NaN	3	0.99	Peak
2	10632.23	Vertical	45.615	74	-28.385	3.1	43	6.55	Peak (PASS)
3	10632.23	Vertical	32.911	54	-21.089	3.1	43	6.55	Average (PASS)
4	12624.37	Vertical	47.949	74	-26.051	3.16	152	7.51	Peak (PASS)
5	12624.37	Vertical	34.8	54	-19.2	3.16	152	7.51	Average (PASS)
6	16059.51	Vertical	50.505	74	-23.495	3.11	189	8.53	Peak (PASS)
7	16059.51	Vertical	37.315	54	-16.685	3.11	189	8.53	Average (PASS)
8	2485.934	Vertical	64.741	74	-9.259	1.13	329	39.15	Peak (PASS)
9	2485.934	Vertical	51.412	54	-2.588	1.13	329	39.15	Average (PASS)


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2480 MHz		

#2 - Horizontal (Horizontal)

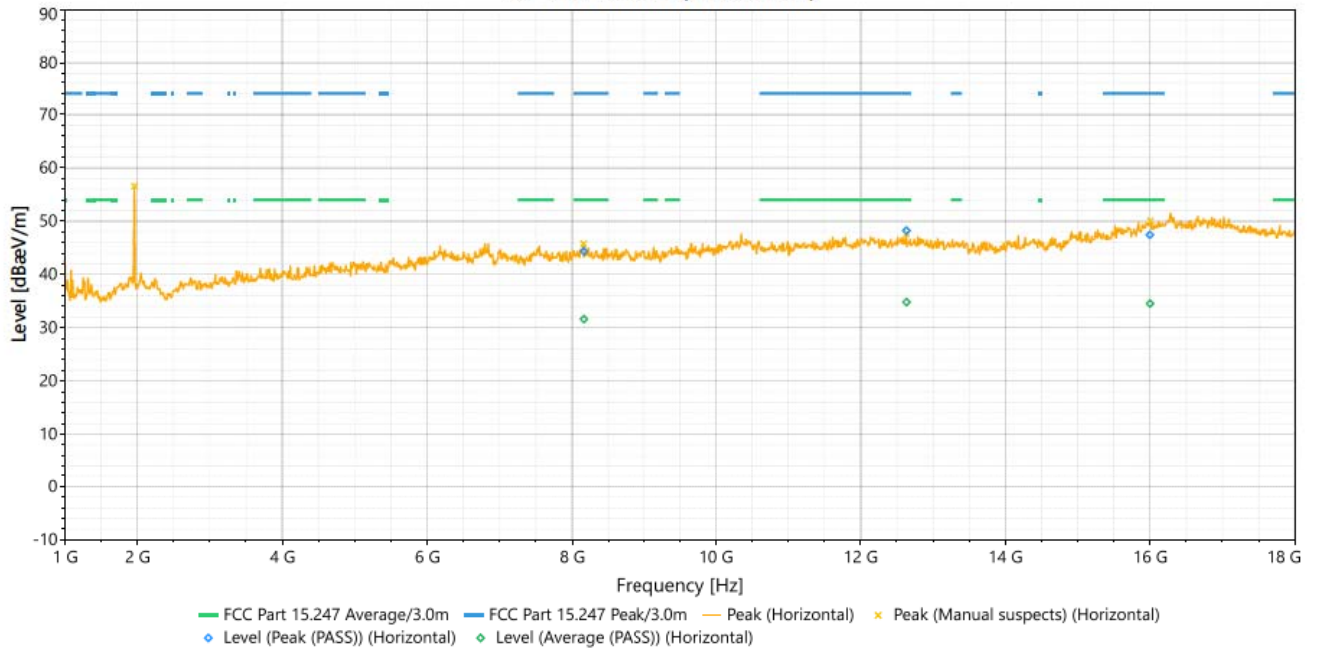

#2 - 2.4835GHz-2.5GHz (Horizontal)

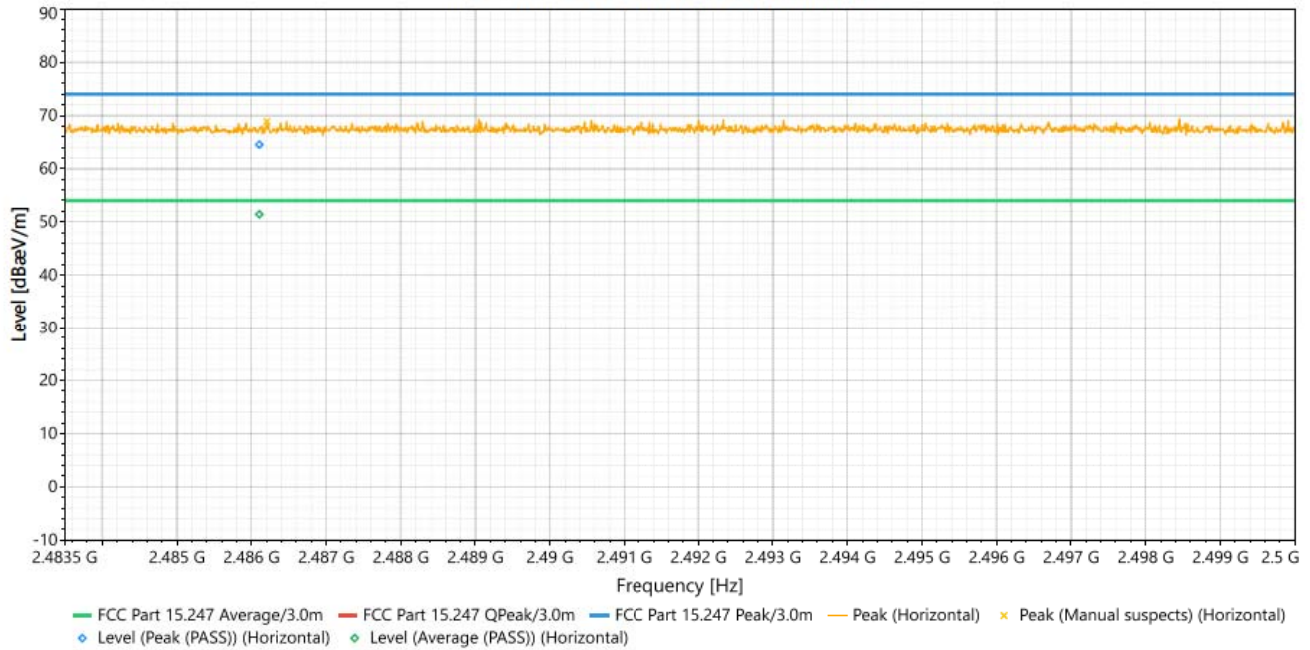

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1960.5	Horizontal	56.564	NaN	NaN	NaN	2.5	1.07	Peak
2	8163.48	Horizontal	44.345	74	-29.655	3.5	317	5.88	Peak (PASS)
3	8163.48	Horizontal	31.6	54	-22.4	3.5	317	5.88	Average (PASS)
4	12632.68	Horizontal	48.216	74	-25.784	3.5	323	7.56	Peak (PASS)
5	12632.68	Horizontal	34.778	54	-19.222	3.5	323	7.56	Average (PASS)
6	15997.17	Horizontal	47.416	74	-26.584	2.6	250	8.53	Peak (PASS)
7	15997.17	Horizontal	34.51	54	-19.49	2.6	250	8.53	Average (PASS)
8	2486.106	Horizontal	64.517	74	-9.483	1.02	206	39.16	Peak (PASS)
9	2486.106	Horizontal	51.43	54	-2.57	1.02	206	39.16	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

Conducted Emission Measurement

Limits of Conducted Emission Measurement :

The following standards specified below are covered in the scope of this section of the test report:


Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Conducted Emissions - Test Procedure

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency ranges from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Conducted Emissions - Test Setup

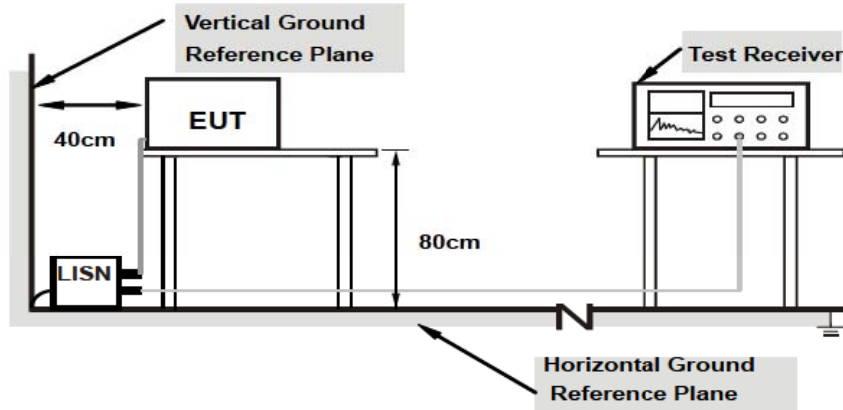

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Results:

N/A

6dB Bandwidth Measurement & 99% Bandwidth Measurement**Limits of Conducted Emission Measurement :**


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

Test Procedure**99% Bandwidth Measurement**

Refer to ANSI C63.10 section 6.9.3

-6dB Bandwidth Measurement

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Conducted Emissions - Test Setup

For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Test Name: 6dB Bandwidth Measurement & 99% Bandwidth Measurement			Test Date(s): 09/27/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/01/2022	11/01/2023
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

Test Result:**DATA RATE:****2 MHz**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.225	2.1010	0.5	PASS
19	2440	1.365	2.1059	0.5	PASS
39	2480	1.361	2.1061	0.5	PASS

Test Plots:


-6dB Bandwidth:




BLE-2402MHz -Data Rate- 2Mbps




BLE-2440MHz-Data Rate- 2Mbps

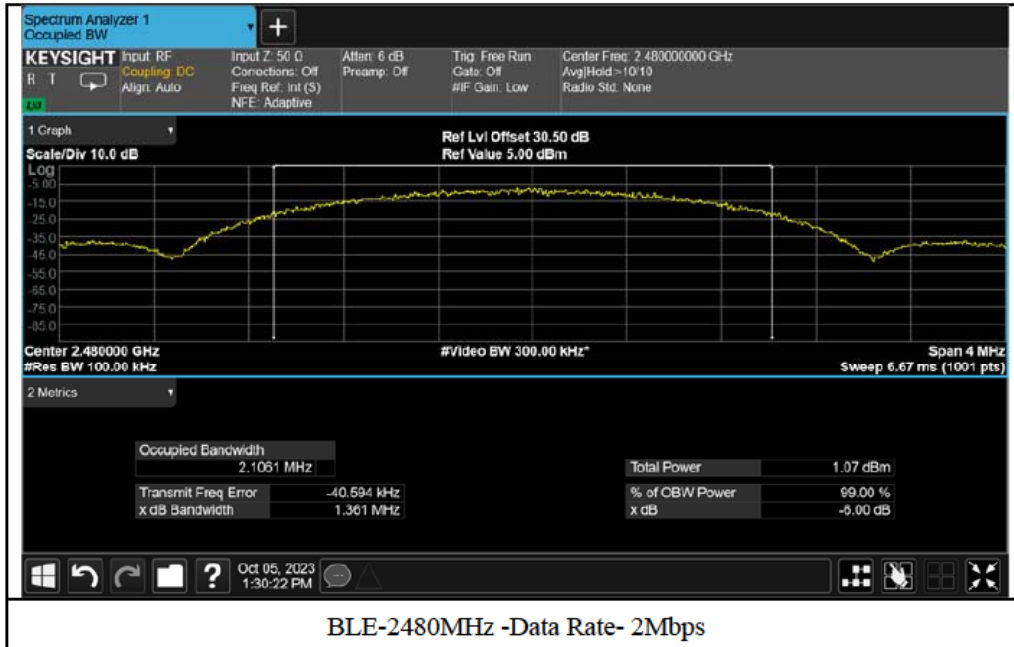


99% Occupied Bandwidth:

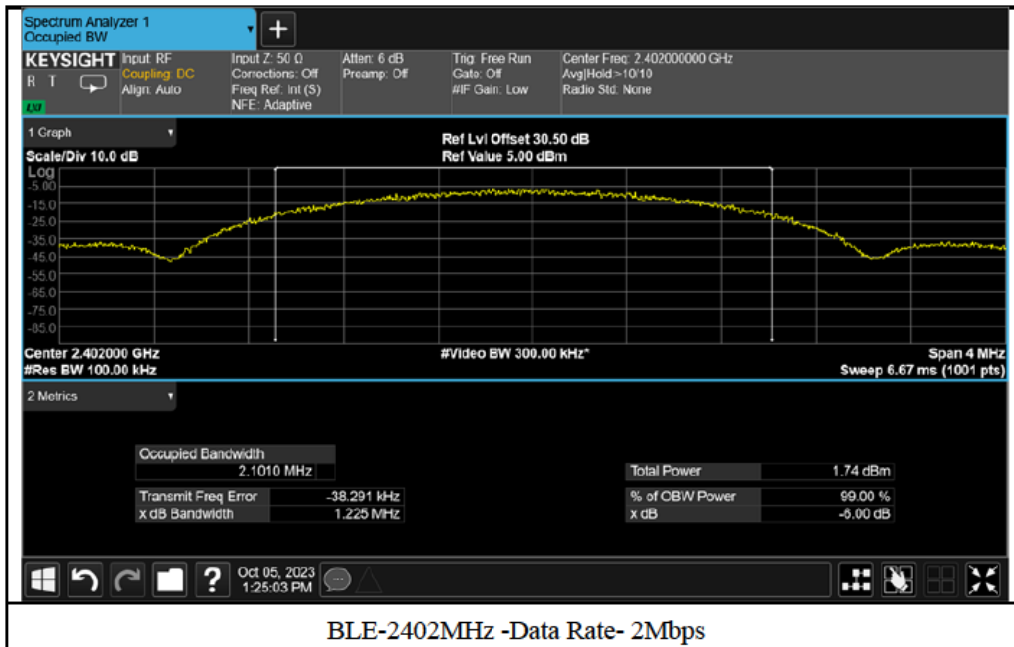

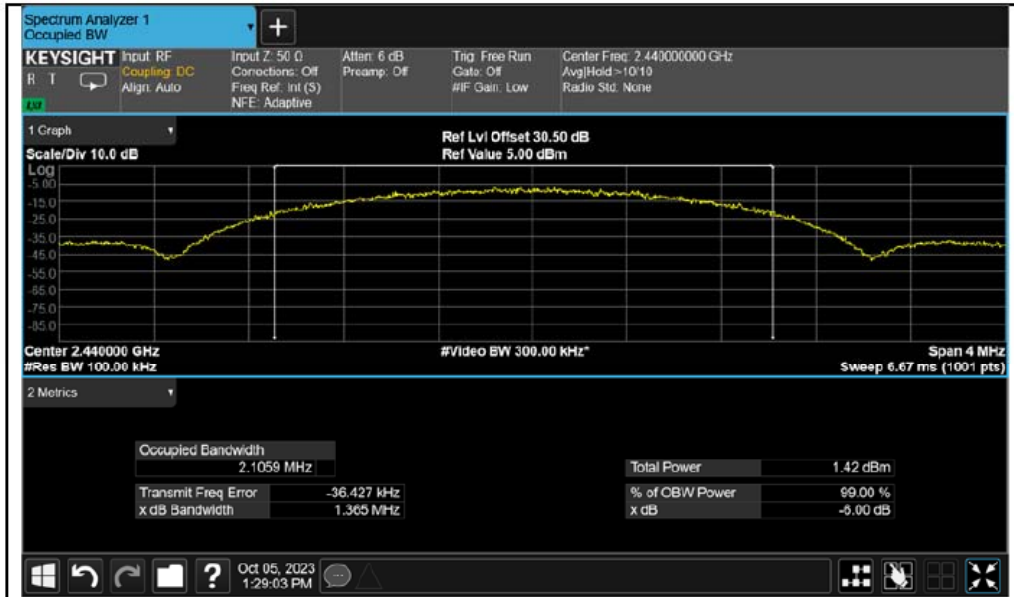

BLE-2440MHz-Data Rate- 2Mbps

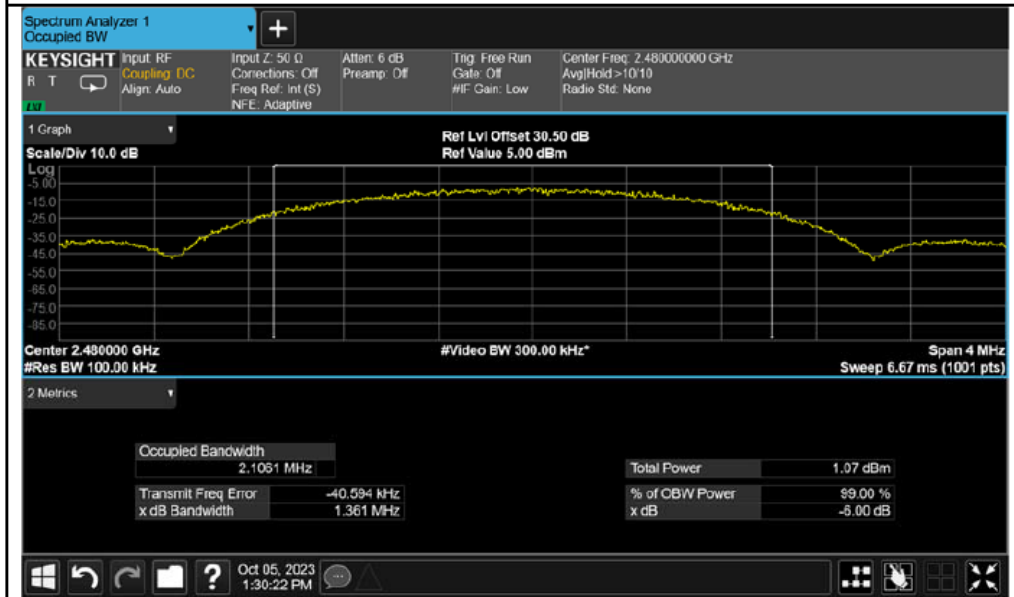

BLE-2480MHz -Data Rate- 2Mbps

Conducted Output Power Measurement

Limits of Output Power Measurement :

FCC 15.247

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)


RSS 247

E.I.R.P for systems using digital modulation in the 2400–2483.5 MHz bands: 4 Watt (36.02dBm)

Test Procedure

A power meter sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Test Setup



For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Test Name: Conducted Output Power Measurement			Test Date(s): 09/27/2023		
Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
N/A	Power Meter	ROHDE & SCHWARZ	NRQ6	06/26/2023	06/26/2024

Test Result:

FCC

Data Rate: 2Mbps (Time-Average Power)

Channel	Frequency (MHz)	Conducted Power (dBm)
0	2402	1.71
19	2440	1.42
39	2480	1.20

ISED:

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Pass/Fail
0	2402	1.71	30	3.21	36.02	Pass
19	2440	1.42	30	2.92	36.02	Pass
39	2480	1.20	30	2.70	36.02	Pass

Power Spectral Density Measurement


Limits of Power Spectral Measurement :

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

Test Procedure

A power meter sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Test Setup



For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.


Test Name: Power Spectral Density Measurement			Test Date(s): 09/27/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/01/2022	11/01/2023
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

Test Result:


Data Rate: 2Mbps

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
0	2402	-14.61	8	Pass
19	2440	-15.11	8	Pass
39	2480	-15.44	8	Pass


Test Plots:

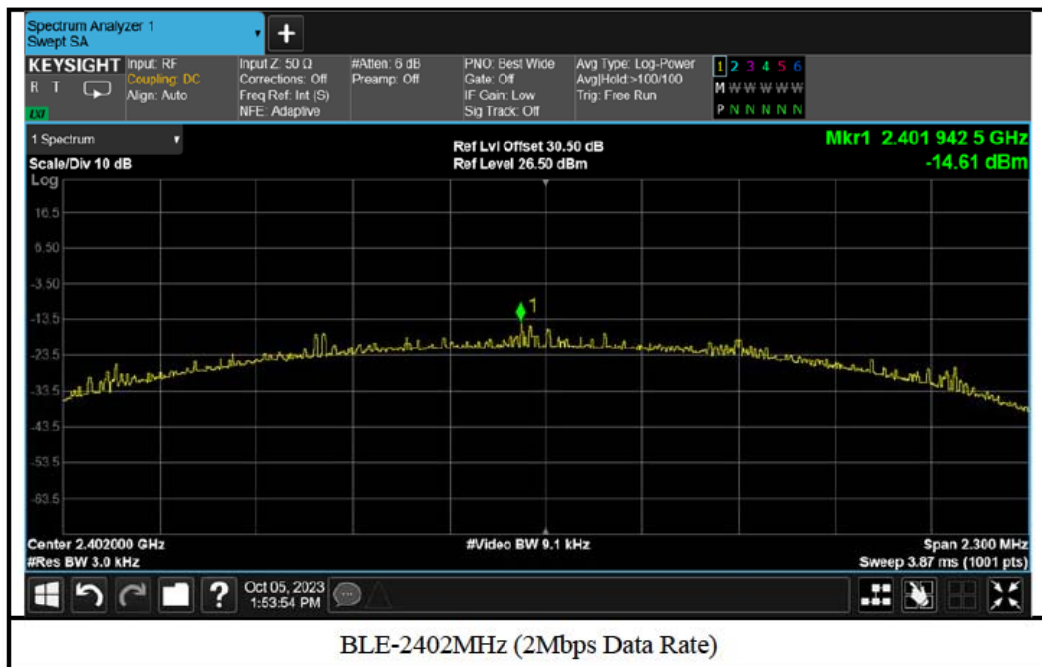

BLE-2402MHz (2Mbps Data Rate)

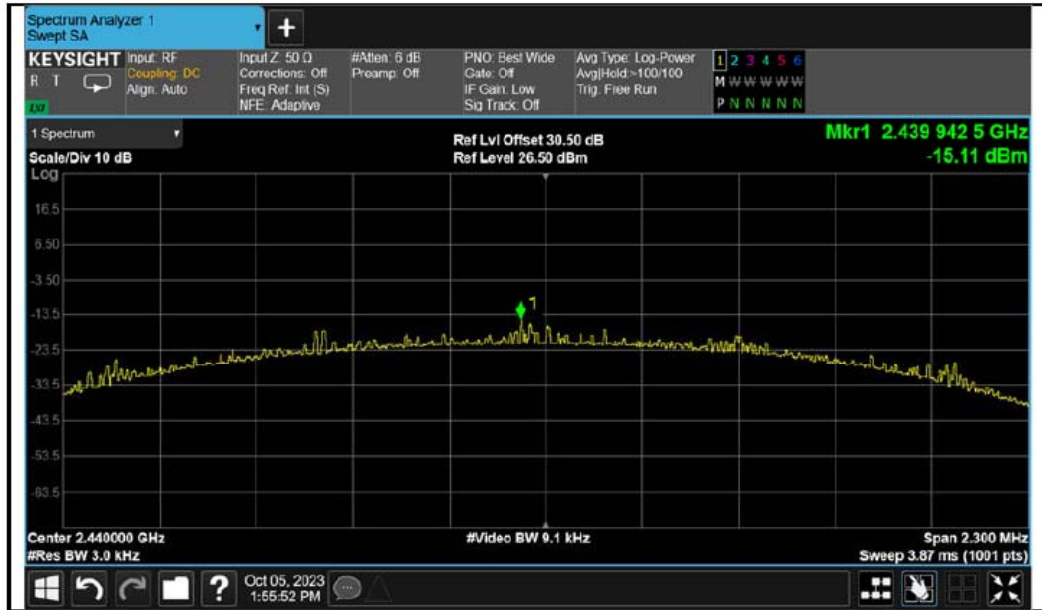

BLE-2440MHz (2Mbps Data Rate)

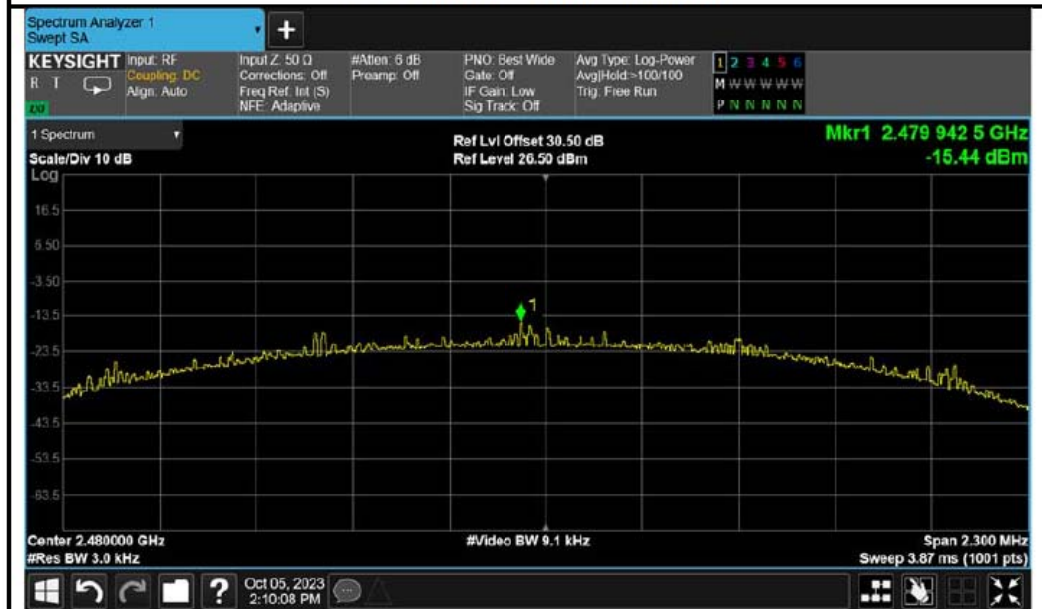

BLE-2480MHz (2Mbps Data Rate)

Conducted Out of Band Emission Measurement**Limits of Conducted Out of Band Emission Measurement:**


Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth)

Test Procedure**MEASUREMENT PROCEDURE REF**

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Setup

For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment


Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Test Name: Conducted Out of Band Emission Measurement			Test Date(s): 09/27/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/01/2022	11/01/2023
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

Test Result:

Data Rate: 2Mbps

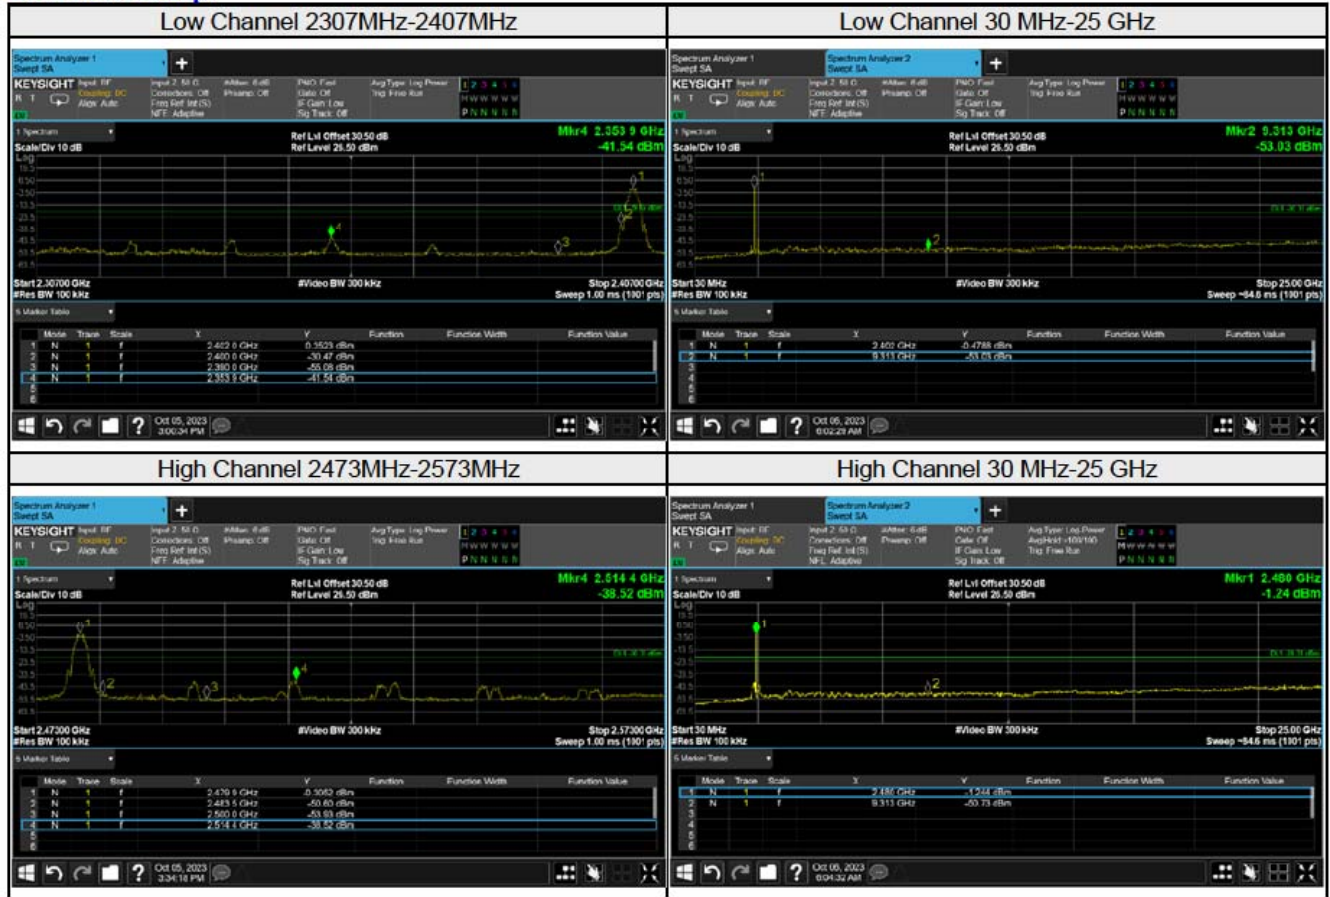

IV. Pictures of test Arrangements

Please see setup photo file

END OF REPORT