

May 03, 2024

Trackonomy Systems  
214 Devcon Drive  
San Jose, CA 95112

Dear Ms. Nivedita Manohar,

Enclosed is the Wireless test report for compliance testing of the Trackonomy Systems, Multifunctional IoT Platform Sensor as tested to the requirements of Title 47 of the CFR, Part 15 Subpart C, RSS 247 for Intentional Radiators.

Thank you for using the services of Eurofins Electrical and Electronic Testing NA, Inc. If you have any questions regarding these results or if Eurofins Electrical and Electronic Testing NA, Inc. can be of further service to you, please feel free to contact me.



Documentation Department  
Eurofins Electrical and Electronic Testing NA, Inc.

Reference: WIR130909-Track\_FCC\_ISED\_BLE



FCC Test Site(s) Reg #:US1123  
IC Test Site(s) Reg. #: 2043C

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins Electrical and Electronic Testing NA, Inc. While use of the A2LA logo in this report reflects Eurofins Electrical and Electronic Testing NA, Inc. accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

## **FCC/ ISED Test Report**

**Applicant name: Trackonomy Systems**

**Product: Multifunctional IoT Platform Sensor**

**Report: WIR130909-Track\_FCC\_ISED\_BLE**

**Applicant Address:**

**214 Devcon Drive  
San Jose, CA 95112**

**Manufacturer Address:**

**214 Devcon Drive  
San Jose, CA 95112**

**Prepared By:  
Eurofins Electrical and Electronic Testing NA, Inc.  
3162 Belick St.  
Santa Clara CA, 95054**

## FCC/ ISED Test Report

**Applicant name: Trackonomy Systems**

**Product: Multifunctional IoT Platform Sensor**

### Standard

**47 CFR FCC Part 15, Subpart C (Section 15.247)**

**558074 D01 15.247 Meas Guidance v05r02**

**RSS 247 Issue3, August 2023**

**RSS Gen Issue5, March 2019**

**ANSI C63.10: 2013**

*Richard Dollente*

Richard Dollente

Test Engineer, Wireless Laboratory

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements FCC Rules under normal use and maintenance.

*Gary Chou*

Gary Chou

Wireless Engineering Manager, Wireless Laboratory

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	May 19, 2024	Initial Issue.

## Table of Contents

<b>I.</b>	<b>Executive Summary</b> .....	<b>6</b>
	A. Executive Summary .....	6
<b>II.</b>	<b>Equipment Information</b> .....	<b>7</b>
	A. Overview.....	7
	B. References.....	9
	C. Test Site .....	9
	D. Measurement Uncertainty .....	10
	E. Modifications .....	10
	Modifications to EUT .....	10
	Modifications to Test Standard.....	10
	F. Disposition of EUT .....	10
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators</b> .....	<b>11</b>
	A. Radiated Emission and Bandage Measurement .....	11
	B. Conducted Emission Measurement.....	26
	C. 6dB Bandwidth Measurement & 99% Bandwidth Measurement .....	29
	D. Conducted Output Power Measurement .....	35
	E. Power Spectral Density Measurement .....	37
	F. Conducted Out of Band Emission Measurement .....	40

## I. Executive Summary

### A. Executive Summary

47 CFR FCC Part 15, Subpart C (SECTION 15.247) RSS 247 Issue3, RSS Gen Issue5				
FCC/ IC Cluse	ISED	Test Item	Result	Remarks
15.207	RSS Gen 8.8	AC Power Conducted Emission	N/A	Powered by battery so test is not required.
15.205 & 15.209 & 15.247(d)	RSS Gen 8.8	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS 247 5.5C	6dB bandwidth & 99% bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS 247 5.2.1 RSS Gen 6.7	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	RSS 247 5.4.4	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	RSS 247 5.2.2	Antenna Requirement	PASS	Meet the requirement.

**Note:**

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## II. Equipment Information

### A. Overview

EUT Summary Table

<b>Product:</b>	Multifunctional IoT Platform Sensor	
<b>Brand:</b>	Trackonomy	
<b>Model(s) Tested:</b>	FBS-2006	
<b>Series Model:</b>	N/A	
<b>Sample Status:</b>	Product Sample	
<b>EUT Specifications:</b>	Primary Power:	3 Vdc
	Voltage Frequency:	N/A
	Technology / Type of Modulations:	BLUETOOTH LE: GFSK
	Operating Frequency :	2.402 ~ 2.480GHz
	FCC ID:	2AXA8-FBS-2006
	ISED ID:	27299-FBS2006
	Antenna Manufacturer / Model	L-COM/ RE14P
	Antenna Type:	Flat Patch Antenna
	Antenna connector:	RP-SMA
	Antenna Gain	Antenna Gain: 14 dBi
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 20.3° C	
	Relative Humidity: 47.5%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Richard Dollente	
<b>Issue Date(s):</b>	May 03, 2024	

NOTE:N/A

The following modules can be chosen to be configured in the EUT.

	Model No.	FCC ID	Note
-	-	-	-
-	-	-	-

**FCC/IC RF Testing Units Setting**

Model	Hardware (FW) Rev.	Firmware (FW) Rev.	FW operation verification and Instruction
FBS-2006	Nominal HW V2	Nominal FW V2	Verify by Spectrum Analyzer & Laptop

**DESCRIPTION OF TEST MODES**

Power Setting :

Channel	Frequency(MHz)	Power Setting
0	2402	default
19	2440	default
39	2480	default

40 channels are provided for Bluetooth LE:

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		



**B. Description of Support Units**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
B	wideband radio communication tester	ROHDE& SCHARZ	CMW500	1201.0002K50	-	Bluetooth Tester

Note: (Describe the outline of a simulator, if used for the tests, as a note under the table.)

Insert Cable Connections to/from EUT provided by test team.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
	-	-	-	-	0	-

Note: The core(s) is(are) originally attached to the cable(s).

**General Description of Applied Standards**

**C. References**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- 47 CFR FCC Part 15, Subpart C (Section 15.247)
- 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10:2013
- RSS 247 Issue3
- RSS Gen Issue5

**D. Test Site**

All testing was performed at Eurofins Electrical and Electronic Testing NA, Inc., 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Eurofins Electrical and Electronic Testing NA, Inc. has been accredited by the American Association for Laboratory Accreditation (A2LA) (Certificate #: 0591.02) in accordance with ISO/IEC 17025:2017.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

**E. Measurement Uncertainty**

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.32 dB	2	95%
RF Power Conducted Spurious Emissions	±2.25 dB	2	95%
RF Power Radiated Emissions	±3.01 dB	2	95%

**Uncertainty Calculations Summary**

**F. Modifications**

**a) Modifications to EUT**

No modifications were made to the EUT.

**b) Modifications to Test Standard**

No modifications were made to the test standard.

**G. Disposition of EUT**

The test sample including all support equipment (if any), submitted to the Electromagnetic Compatibility Lab for testing was returned to Trackonomy System upon completion of testing.

### III. Electromagnetic Compatibility Criteria for Intentional Radiators

#### Radiated Emission and Bandage Measurement

Limits of Radiated Emission and Bandage Measurement:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:


Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### Test Procedures:


The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz.

**Test Setup**


**For Radiated Emission Below 30MHz**

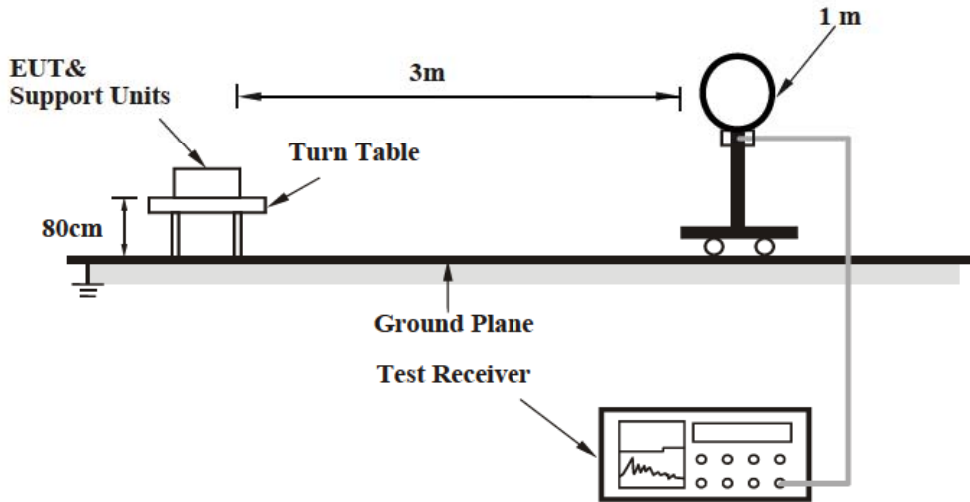

**For Radiated emission 30 MHz to 1GHz**

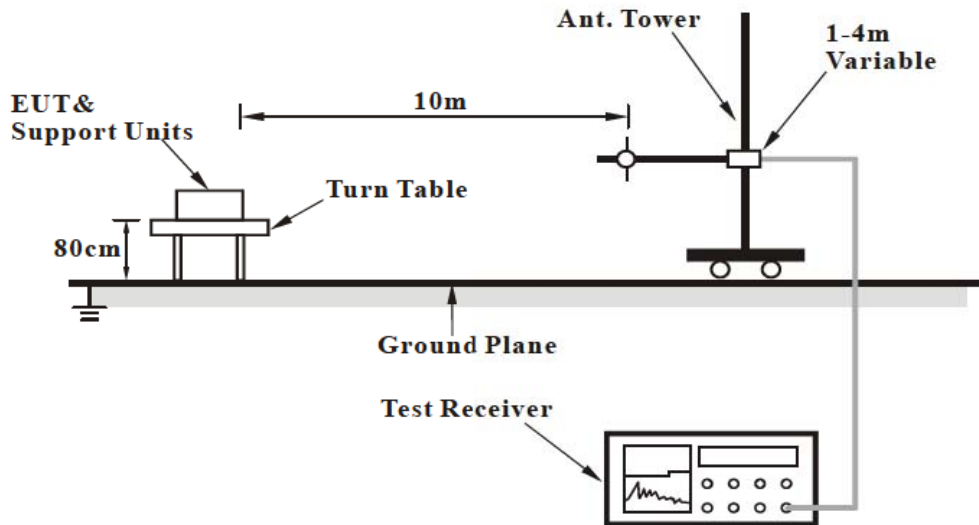

**For Radiated emission 1GHz to 40GHz**

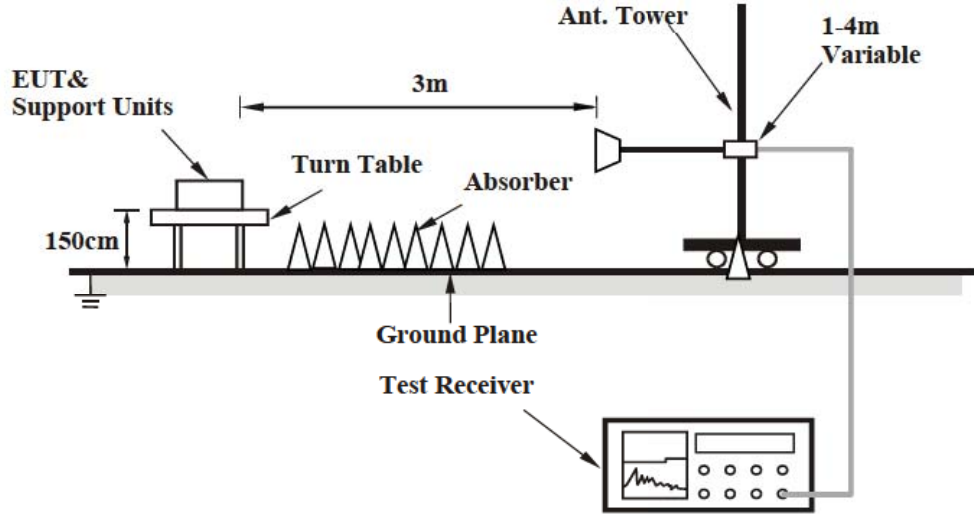

**Test Results:** The EUT was tested is **compliant** with Radiated Spurious Emissions Requirements.

**Test Equipment List**

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/06/2023	11/06/2024
1S2399	Turntable Controller	SUNOL SCIENCE	SC99V	Not Required	Not Required
1S2486	5 Meter Chamber Control Room	Panashield	5 Meter Control Room	Not Required	Not Required
1S3826	Horn Antenna	ETS-LINDGREN	3117	04/06/2023	04/06/2025
1S4802	Preamplifier	EMC Instrument	EMC118A45SE	Note 1	Note 1
1S2668	Preamplifier	Sonoma Instrument	310N	Note 1	Note 1
1S2600	Antenna	Sunol Sciences Corp	JB3	04/ 11/ 2023	04/ 11/ 2025

Note 1: Verified by calibrated instrumentation at the time of testing

**Test Engineer:** Richard Dollente


**Test Date(s):** March/ 20/ 2024

## Test Data

### Radiated Emissions (30 MHz~1000 MHz)

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	30MHz-1GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#1 - Vertical (Vertical)

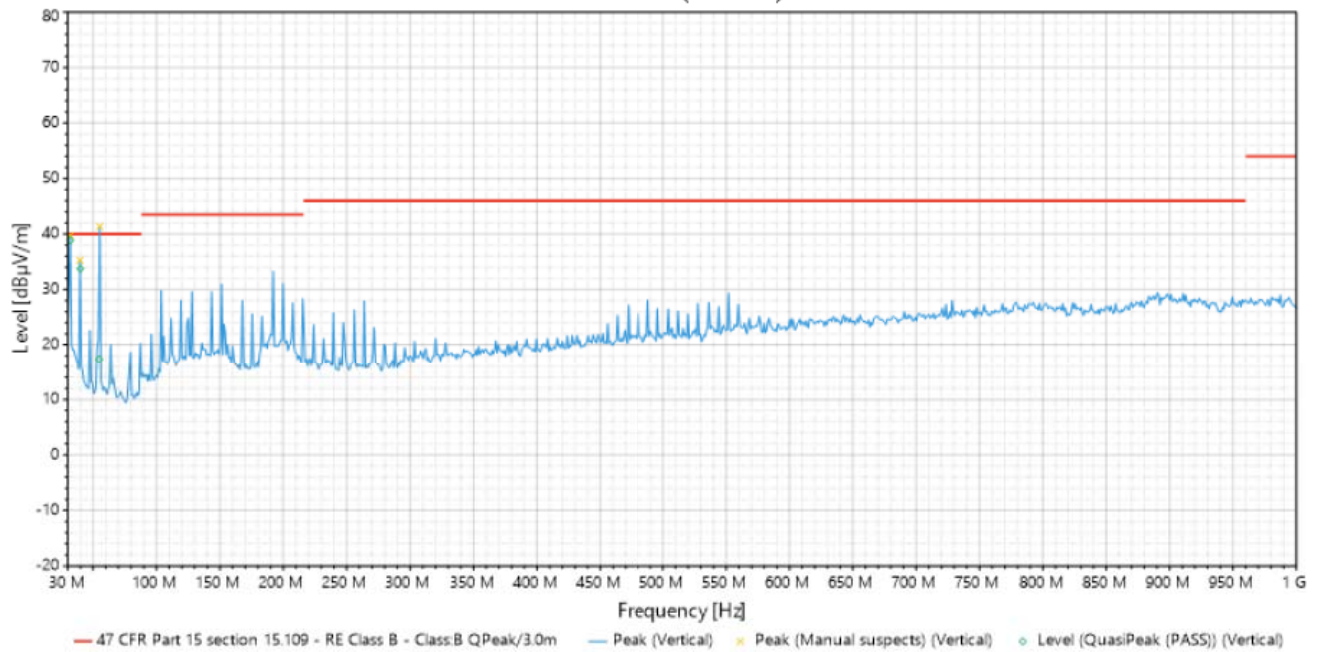


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	32.01	Vertical	38.857	40	-1.143	1.144	326	-3.9	Pass
2	40.01	Vertical	33.757	40	-6.243	1.036	222	-9.946	Pass
3	54.71	Vertical	17.379	40	-22.621	2.146	76	-14.426	Pass

#### REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	30MHz-1GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#2 - Horizontal (Horizontal)

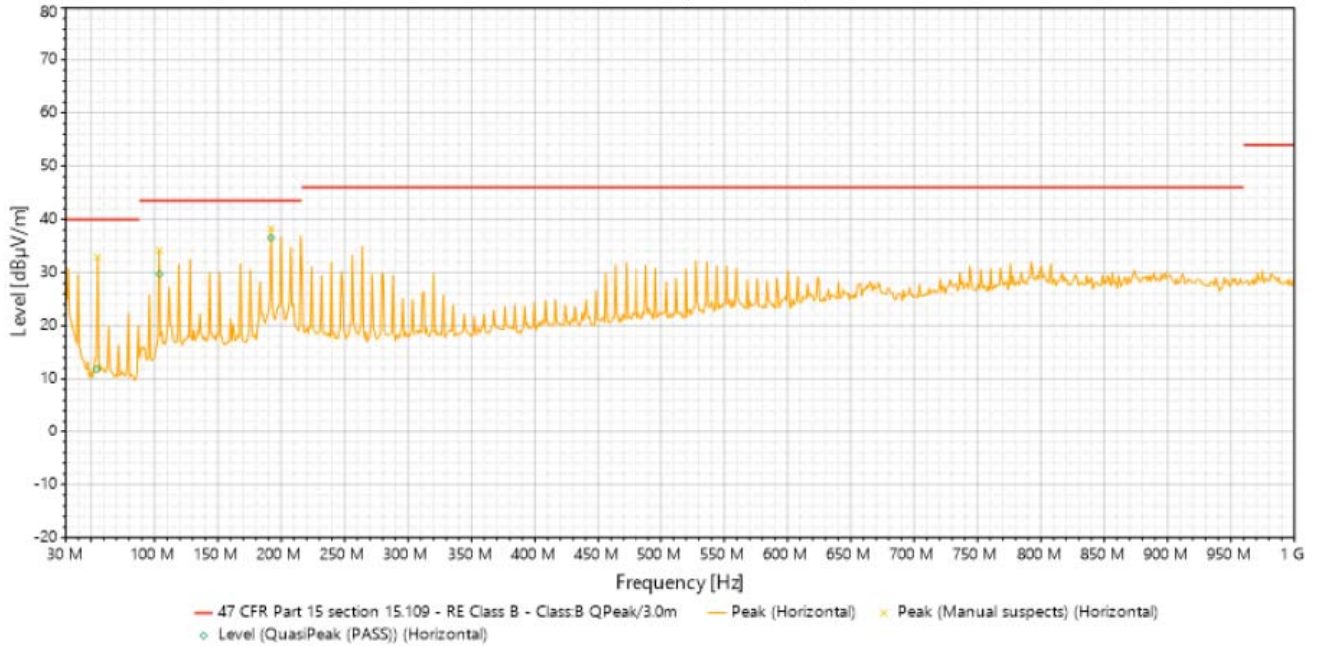


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	54.37	Horizontal	11.87	40	-28.13	2.616	54	-13.975	Pass
2	104	Horizontal	29.697	43.5	-13.803	2.148	143	-9.725	Pass
3	192.01	Horizontal	36.534	43.5	-6.966	1.2	215	-8.762	Pass

**REMARKS:**

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AT) (dB(1/m)) † Cable Loss (dB) † Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.


### Radiated Emissions (Above 1GHz)

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2402 MHz		

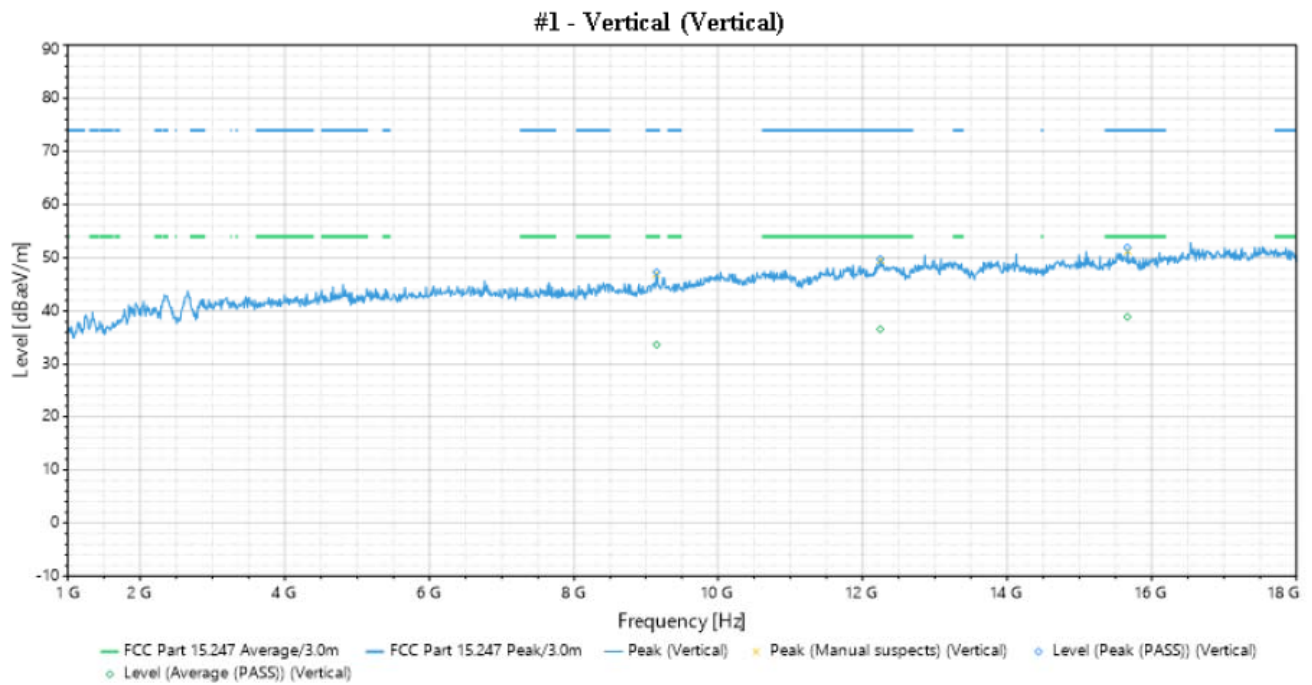



#1 - Vertical (2.31GHz - 2.39GHz) (Vertical)

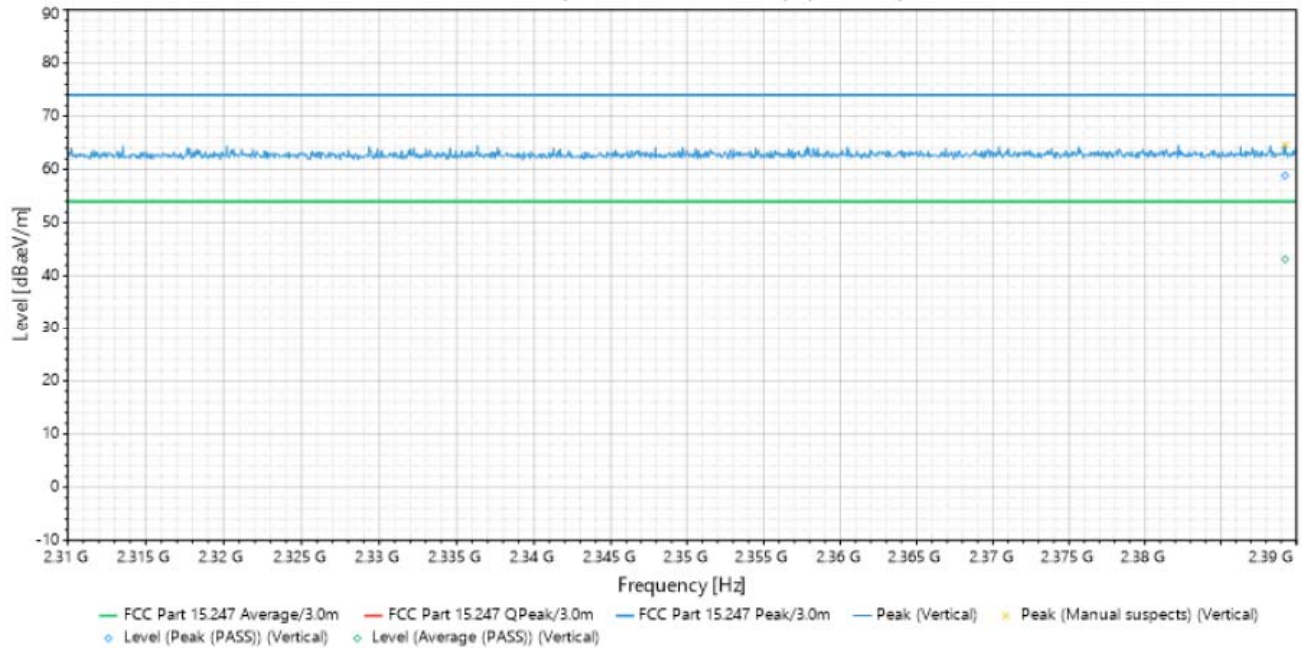


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	9151.6	Vertical	47.314	74	-26.686	3.1	347	6.509	Peak (PASS)
2	9151.6	Vertical	33.694	54	-20.306	3.1	347	6.509	Average (PASS)
3	12245.4	Vertical	49.774	74	-24.226	3.1	68	8.97	Peak (PASS)
4	12245.4	Vertical	36.6	54	-17.4	3.1	68	8.97	Average (PASS)
5	15663.6	Vertical	51.962	74	-22.038	3.1	238	10.004	Peak (PASS)
6	15663.6	Vertical	38.922	54	-15.078	3.1	238	10.004	Average (PASS)
7	2389.265	Vertical	58.854	74	-15.146	1.313	149	38.203	Peak (PASS)
8	2389.265	Vertical	43.127	54	-10.873	1.313	149	38.203	Average (PASS)

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2402 MHz		

#2 - Horizontal (Horizontal)

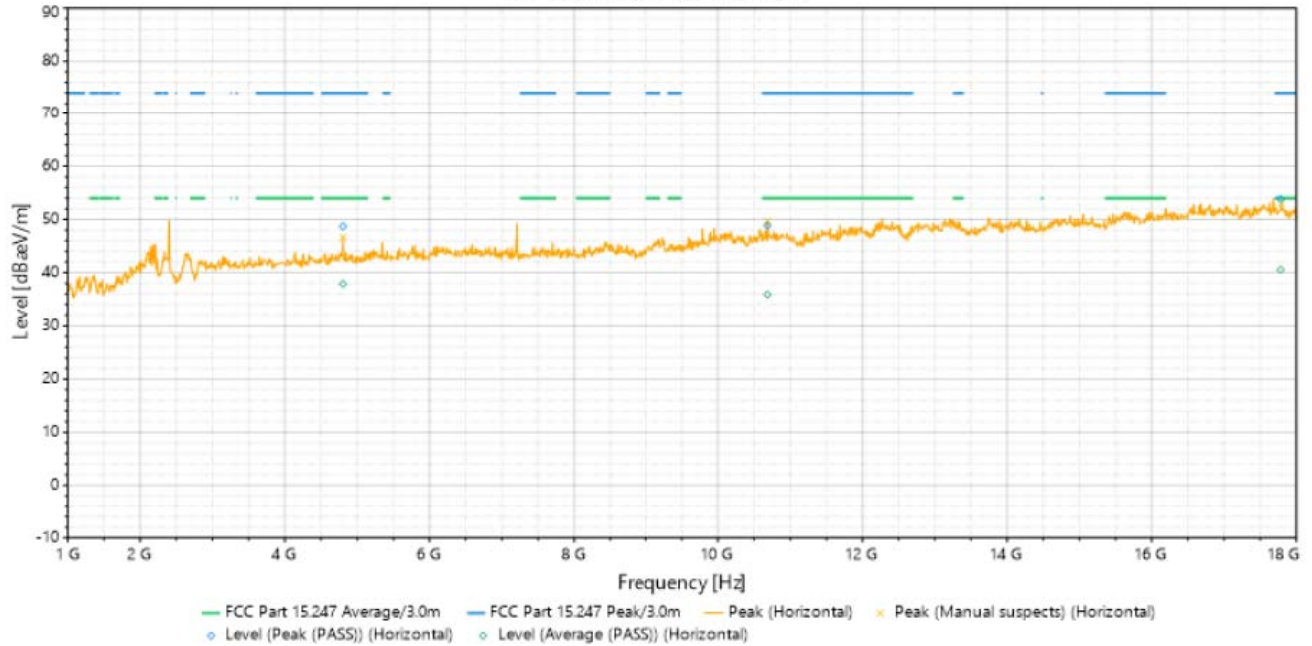

#2 - Horizontal (2.31GHz - 2.39GHz) (Horizontal)

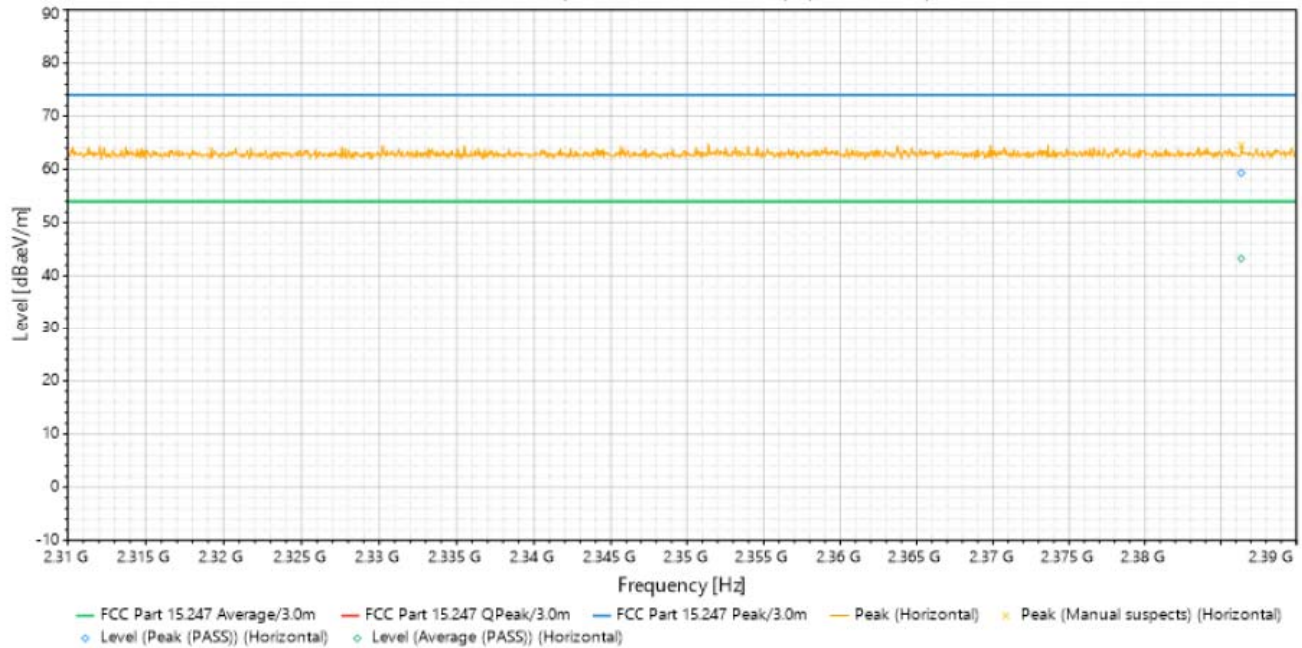


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4803.2	Horizontal	48.714	74	-25.286	3.5	99	4.086	Peak (PASS)
2	4803.2	Horizontal	37.874	54	-16.126	3.5	99	4.086	Average (PASS)
3	10683.8	Horizontal	48.844	74	-25.156	3.5	222	7.787	Peak (PASS)
4	10683.8	Horizontal	35.883	54	-18.117	3.5	222	7.787	Average (PASS)
5	17783.1	Horizontal	53.871	74	-20.129	3.5	230	8.695	Peak (PASS)
6	17783.1	Horizontal	40.547	54	-13.453	3.5	230	8.695	Average (PASS)
7	2386.356	Horizontal	59.349	74	-14.651	1.313	210	2483.885	Peak (PASS)
8	2386.356	Horizontal	43.263	54	-10.737	1.313	210	2483.885	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#1 - Vertical (Vertical)

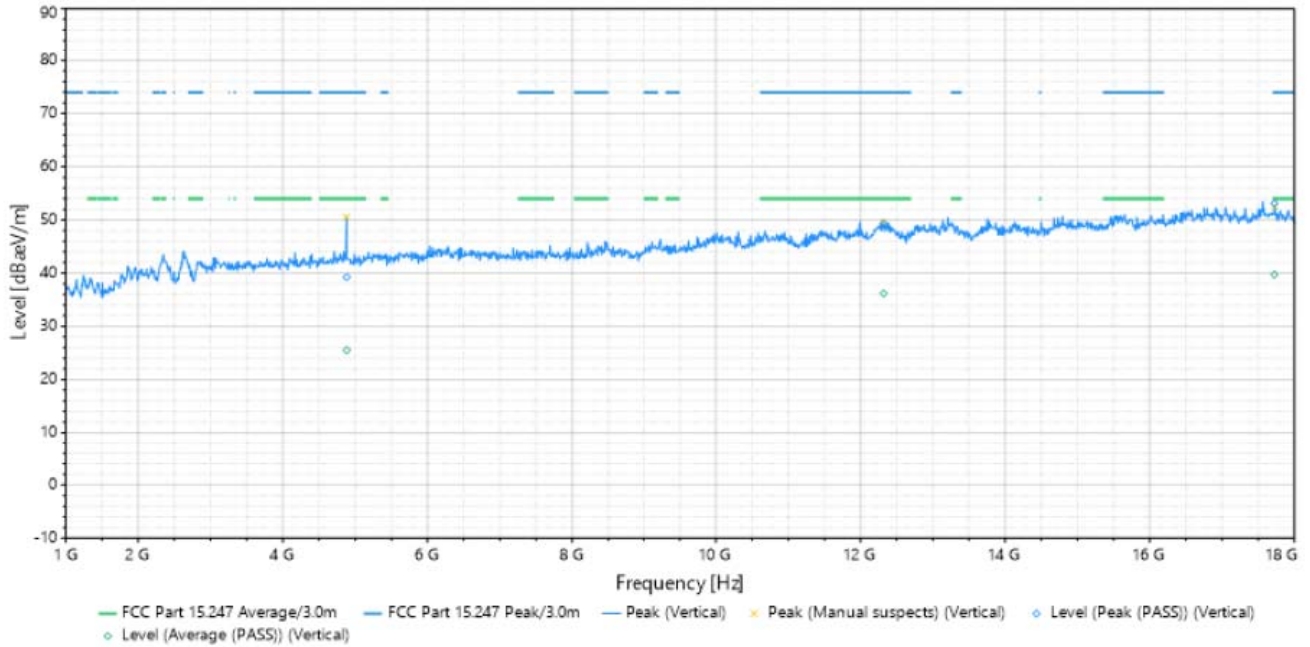


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4884	Vertical	39.255	74	-34.745	2.1	107	4.177	Peak (PASS)
2	4884	Vertical	25.543	54	-28.457	2.1	107	4.177	Average (PASS)
3	12319.1	Vertical	49.335	74	-24.665	3.1	378	8.898	Peak (PASS)
4	12319.1	Vertical	36.187	54	-17.813	3.1	378	8.898	Average (PASS)
5	17725.8	Vertical	53.11	74	-20.89	3.1	290	8.864	Peak (PASS)
6	17725.8	Vertical	39.725	54	-14.275	3.1	290	8.864	Average (PASS)

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#2 - Horizontal (Horizontal)

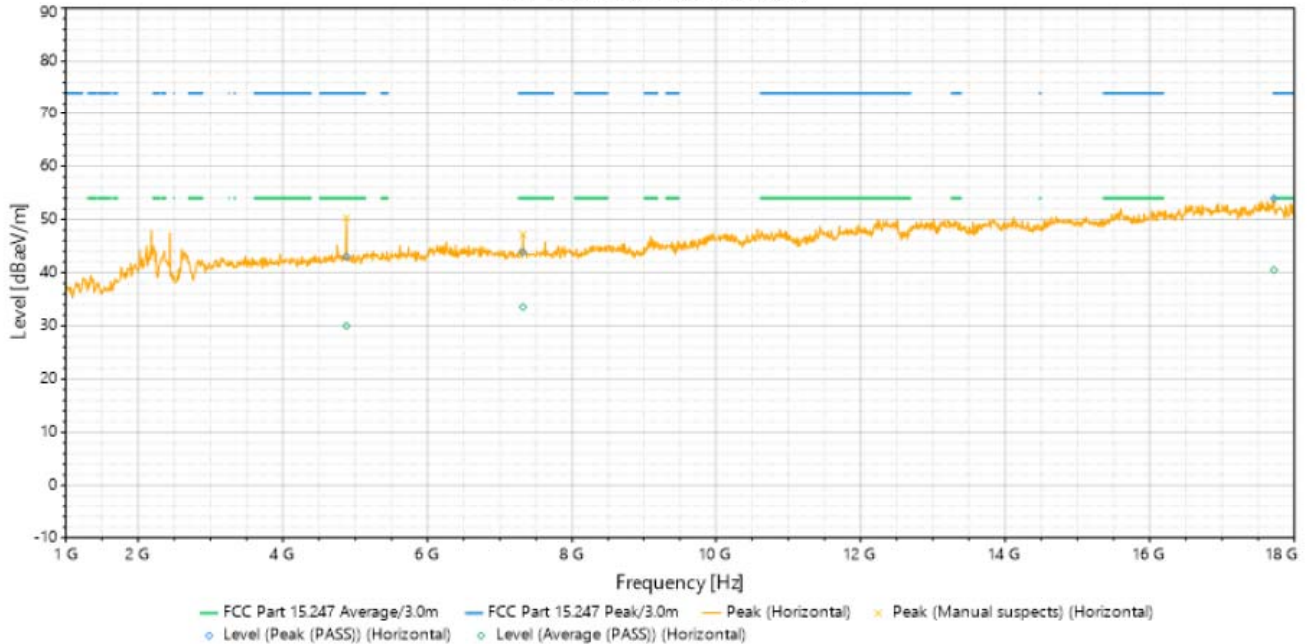


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4879.2	Horizontal	43.019	74	-30.981	2.599	77	4.124	Peak (PASS)
2	4879.2	Horizontal	29.986	54	-24.014	2.599	77	4.124	Average (PASS)
3	7318.8	Horizontal	43.845	74	-30.155	2.099	19	6.573	Peak (PASS)
4	7318.8	Horizontal	33.533	54	-20.467	2.099	19	6.573	Average (PASS)
5	17719.5	Horizontal	53.958	74	-20.042	3.5	79	8.76	Peak (PASS)
6	17719.5	Horizontal	40.522	54	-13.478	3.5	79	8.76	Average (PASS)

**REMARKS:**


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2480 MHz		

#1 - Vertical (Vertical)

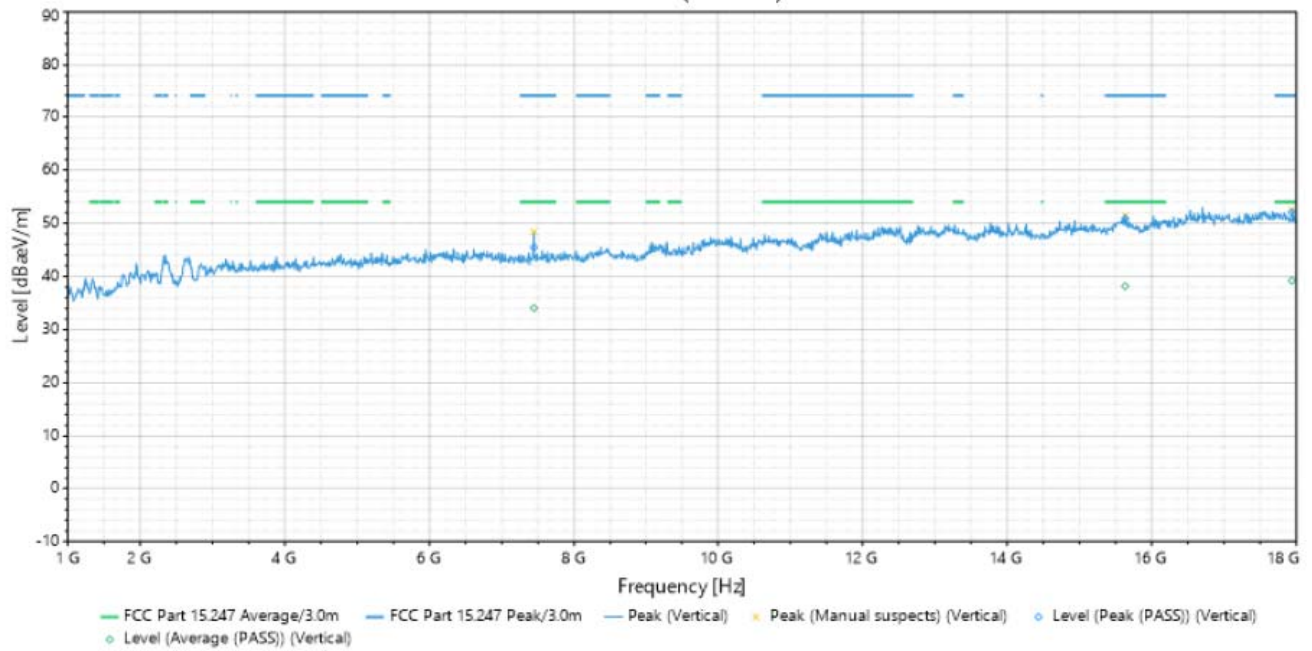

#1 - Vertical (2.4835GHz - 2.5GHz) (Vertical)

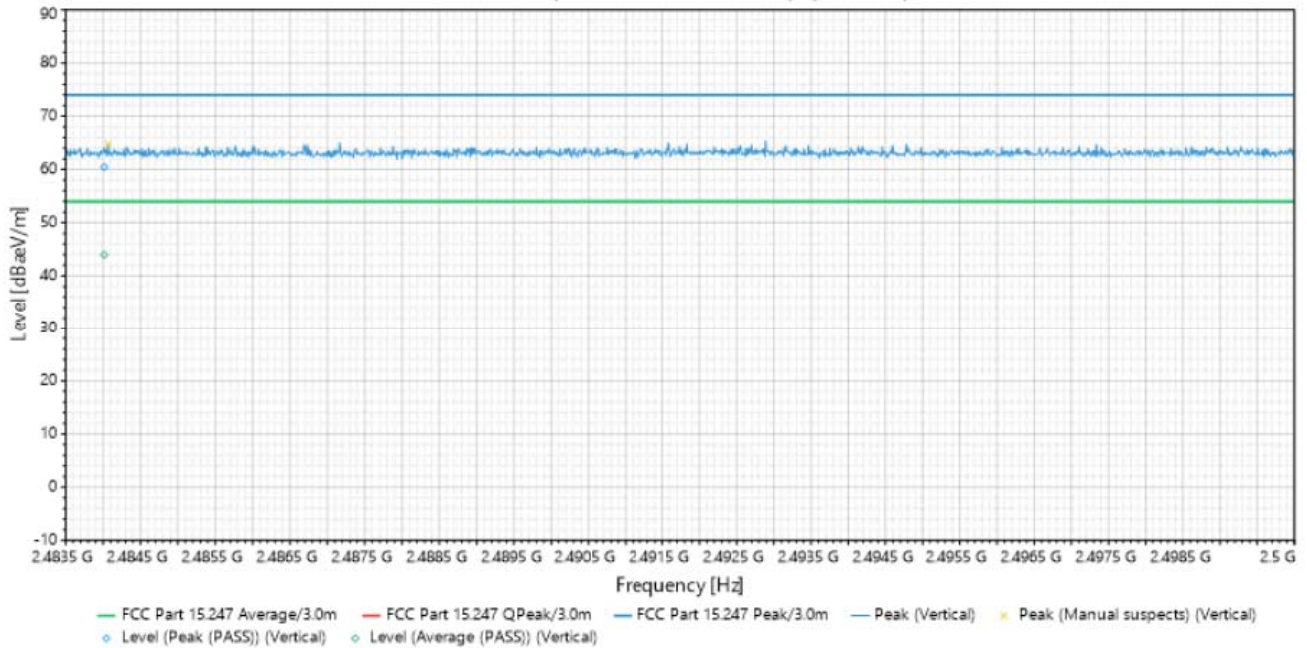


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7441.8	Vertical	45.46	74	-28.54	2.1	286	6.578	Peak (PASS)
2	7441.8	Vertical	34.048	54	-19.952	2.1	286	6.578	Average (PASS)
3	15633.1	Vertical	50.902	74	-23.098	3.1	69	9.978	Peak (PASS)
4	15633.1	Vertical	38.171	54	-15.829	3.1	69	9.978	Average (PASS)
5	17939.9	Vertical	52.074	74	-21.926	3.1	69	8.818	Peak (PASS)
6	17939.9	Vertical	39.231	54	-14.769	3.1	69	8.818	Average (PASS)
7	2484.014	Vertical	60.475	74	-13.525	2.635	6	38.631	Peak (PASS)
8	2484.014	Vertical	43.96	54	-10.04	2.635	6	38.631	Average (PASS)

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.


EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2480 MHz		

#2 - Horizontal (Horizontal)

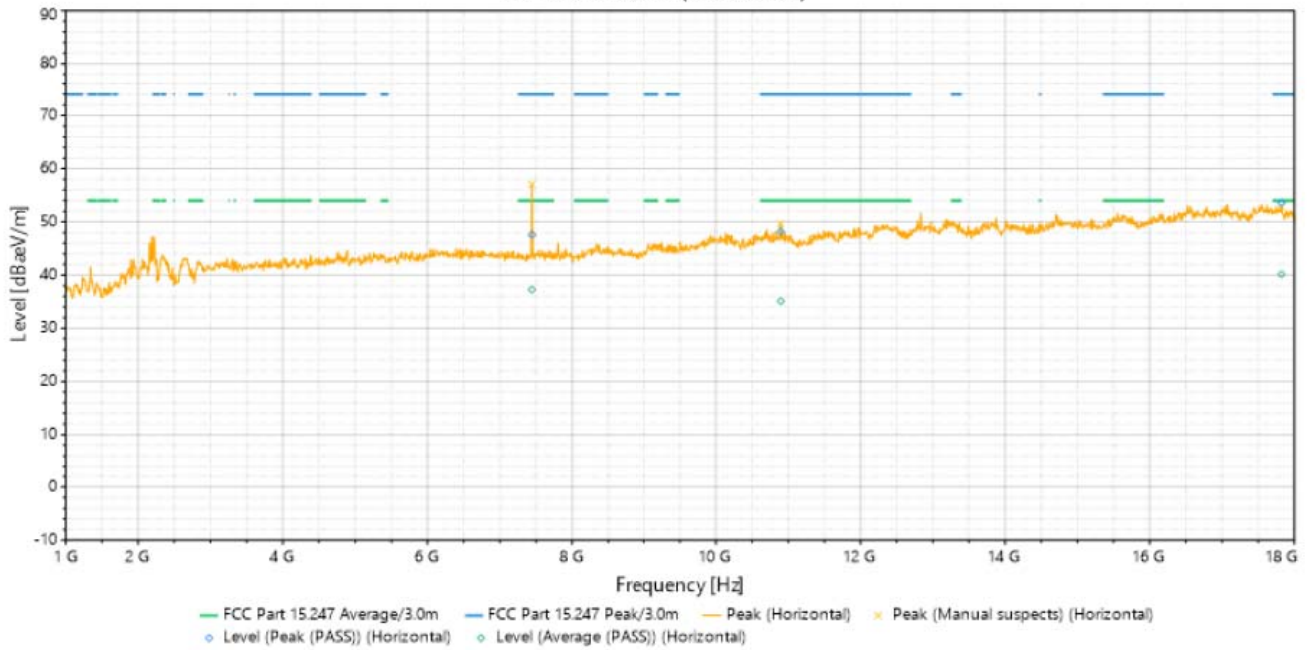



#2 - Horizontal (2.4835GHz - 2.5GHz) (Horizontal)

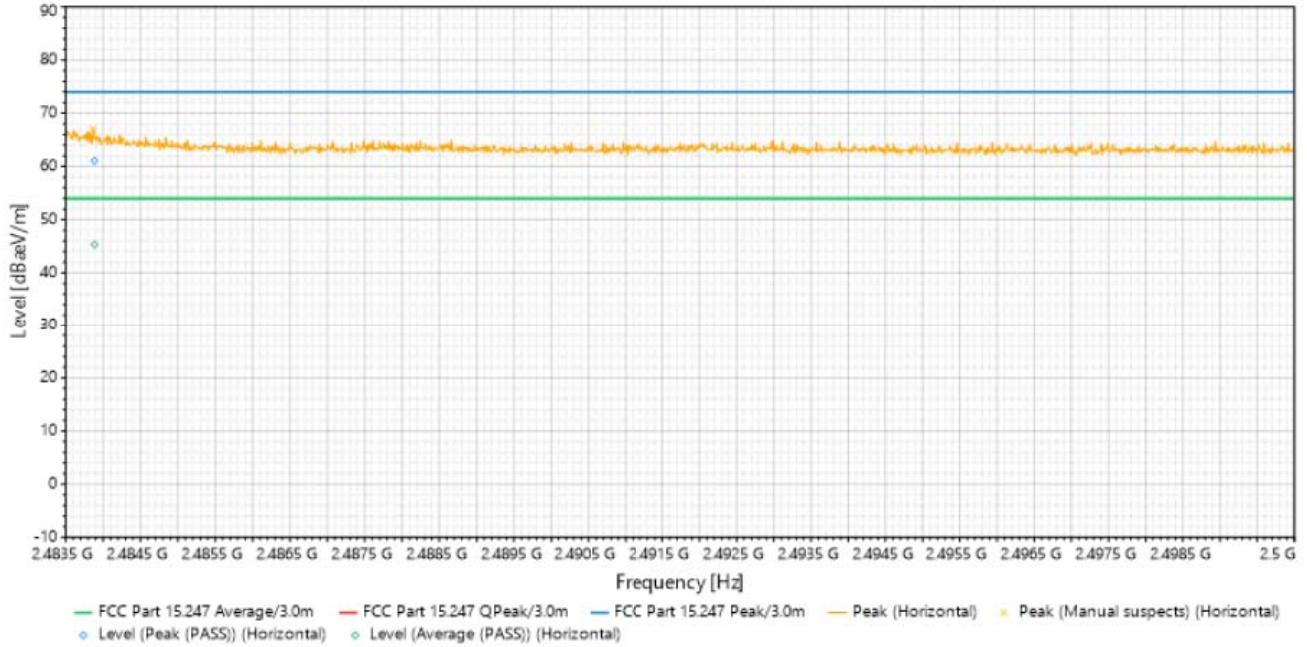

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7441.8	Horizontal	47.611	74	-26.389	2.099	94	6.586	Peak (PASS)
2	7441.8	Horizontal	37.282	54	-16.718	2.099	94	6.586	Average (PASS)
3	10896.4	Horizontal	48.205	74	-25.795	3.5	97	7.822	Peak (PASS)
4	10896.4	Horizontal	35.098	54	-18.902	3.5	97	7.822	Average (PASS)
5	17822.9	Horizontal	53.59	74	-20.41	3.5	3	8.688	Peak (PASS)
6	17822.9	Horizontal	40.173	54	-13.827	3.5	3	8.688	Average (PASS)
7	2483.885	Horizontal	61.087	74	-12.913	1.01	352	38.634	Peak (PASS)
8	2483.885	Horizontal	45.343	54	-8.657	1.01	352	38.634	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

**Conducted Emission Measurement****Limits of Conducted Emission Measurement :**

The following standards specified below are covered in the scope of this section of the test report:


Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

**Conducted Emissions - Test Procedure**

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency ranges from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**Conducted Emissions - Test Setup**

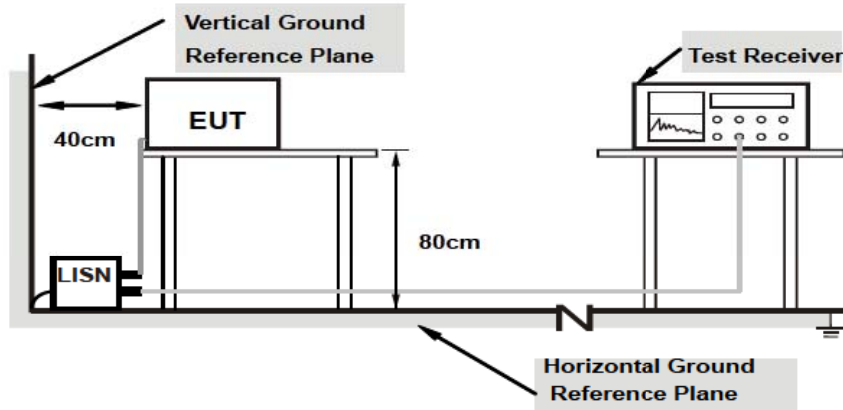

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo)

**Test Results:**

N/A

**6dB Bandwidth Measurement & 99% Bandwidth Measurement****Limits of Conducted Emission Measurement :**


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

**Test Procedure****99% Bandwidth Measurement**

Refer to ANSI C63.10 section 6.9.3

**-6dB Bandwidth Measurement**

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

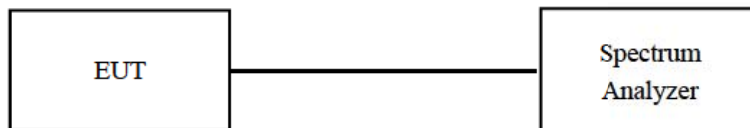**Conducted Emissions - Test Setup**

For the actual test configuration, please refer to the attached file (Test Setup Photo)

**Test Equipment**

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

<b>Test Name:</b> 6dB Bandwidth Measurement & 99% Bandwidth Measurement			<b>Test Date(s):</b> 05/19/2024		
<b>MET Asset #</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Last Cal Date</b>	<b>Cal Due Date</b>
1S2003	EMI Test Receiver	Keysight	N9030B	11/06/2023	11/06/2024
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

**Test Result:**


**DATA RATE:**

2 MHz

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.470	2.1940	0.5	PASS
19	2440	1.514	2.1979	0.5	PASS
39	2480	1.344	2.1922	0.5	PASS

Test Plots:

-6dB Bandwidth:

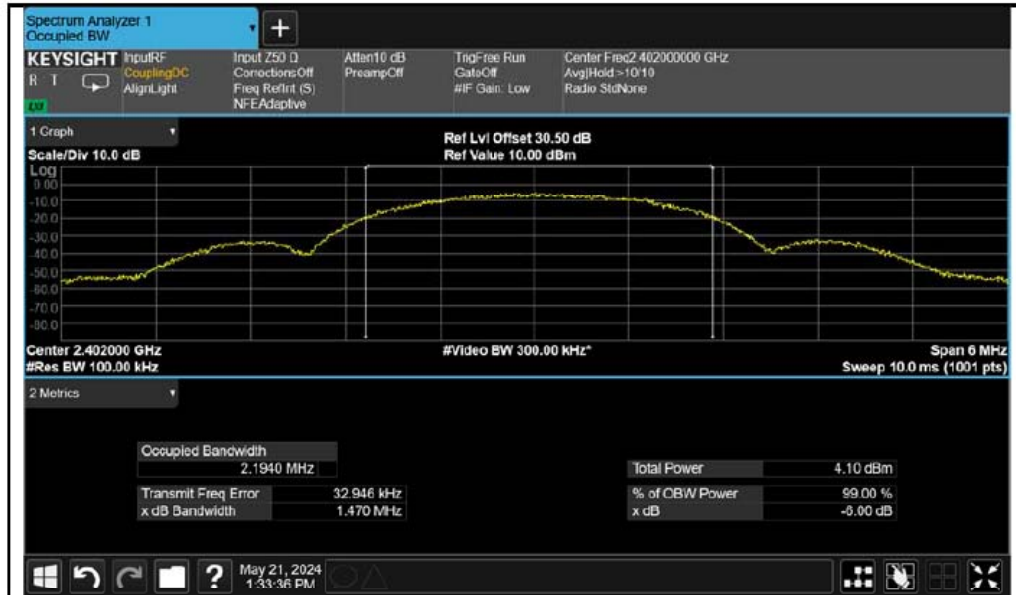

BLE-2402MHz -Data Rate- 2Mbps




BLE-2440MHz-Data Rate- 2Mbps






99% Occupied Bandwidth:

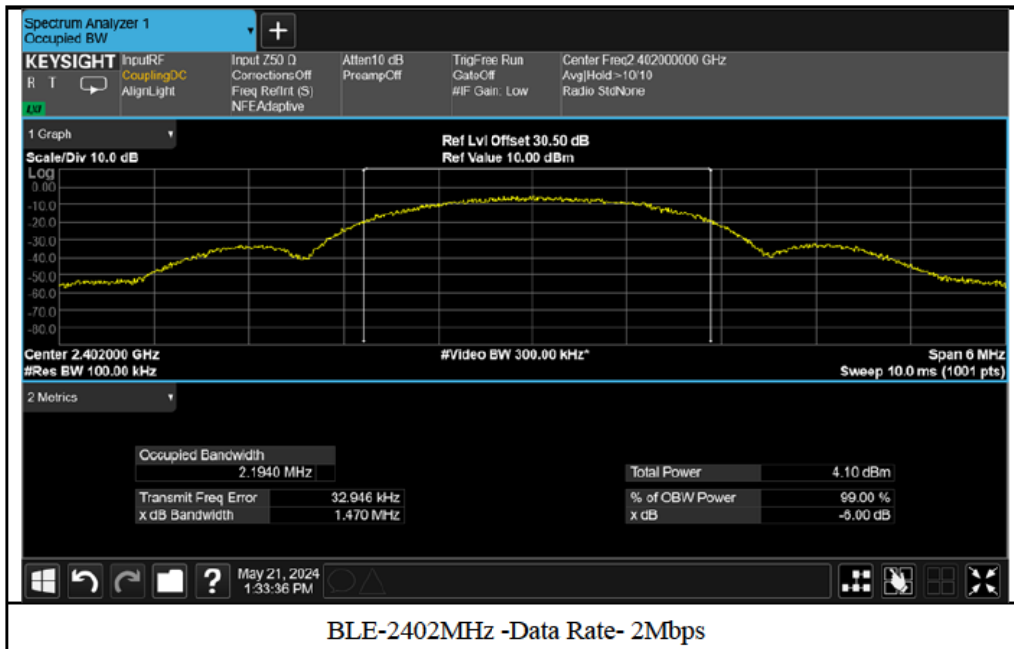



BLE-2440MHz-Data Rate- 2Mbps

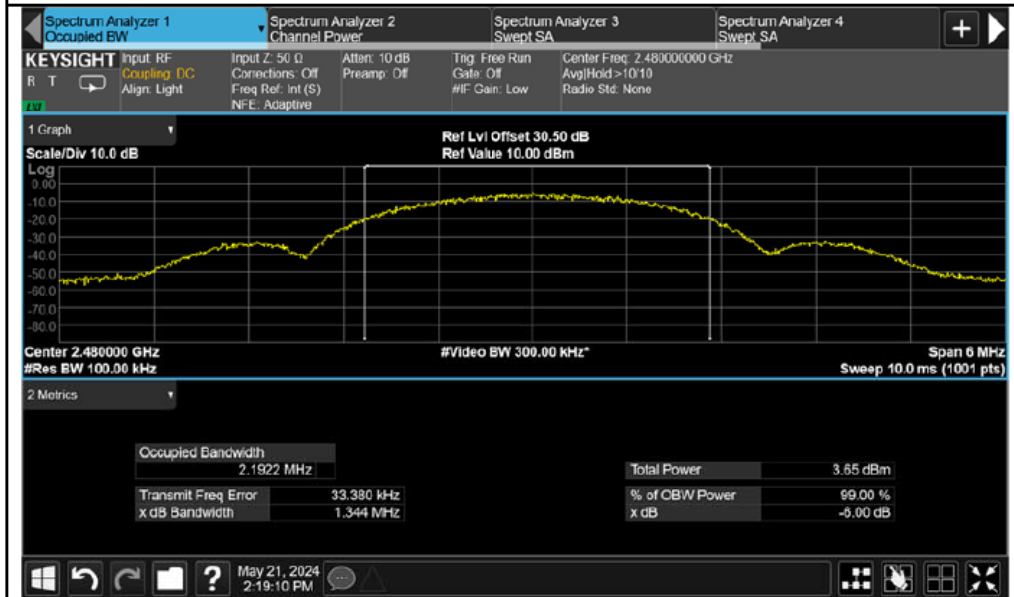

BLE-2480MHz -Data Rate- 2Mbps

**Conducted Output Power Measurement**

**Limits of Output Power Measurement :**

FCC 15.247

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)


RSS 247

E.I.R.P for systems using digital modulation in the 2400–2483.5 MHz bands: 4 Watt (36.02dBm)

**Test Procedure**

A power meter sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

**Test Setup**

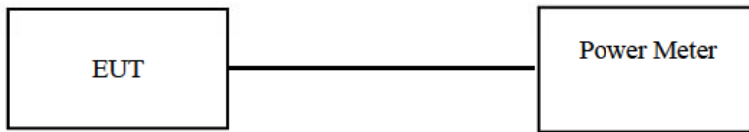

For the actual test configuration, please refer to the attached file (Test Setup Photo)

**Test Equipment**

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

<b>Test Name:</b> Conducted Output Power Measurement			<b>Test Date(s):</b> 05/19/2024		
Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
N/A	Power Meter	ROHDE & SCHWARZ	NRQ6	06/26/2023	06/26/2024

**Test Result:**

**FCC**

Data Rate: 2Mbps (Time-Average Power)

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	4.03	22	Pass
19	2440	3.70	22	Pass
39	2480	3.55	22	Pass

**ISED:**

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Pass/Fail
0	2402	4.03	22	18.03	28.02	Pass
19	2440	3.70	22	17.70	28.02	Pass
39	2480	3.55	22	17.55	28.02	Pass

**Power Spectral Density Measurement**


**Limits of Power Spectral Measurement :**

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

**Test Procedure**

A power meter sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

**Test Setup**

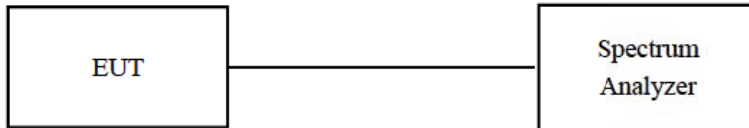

For the actual test configuration, please refer to the attached file (Test Setup Photo)

**Test Equipment**

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.


<b>Test Name:</b> Power Spectral Density Measurement			<b>Test Date(s):</b> 05/19/2024		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/06/2023	11/06/2024
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					


### Test Result:

Data Rate: 2Mbps


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
0	2402	-13.26	8	Pass
19	2440	-12.94	8	Pass
39	2480	-11.99	8	Pass

### Test Plots:

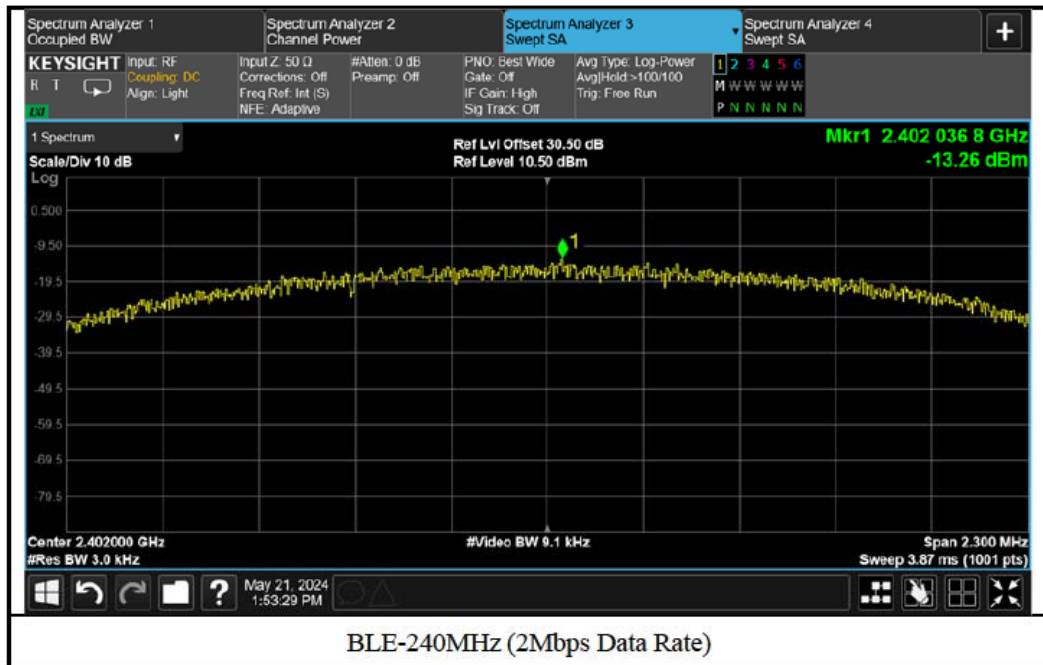

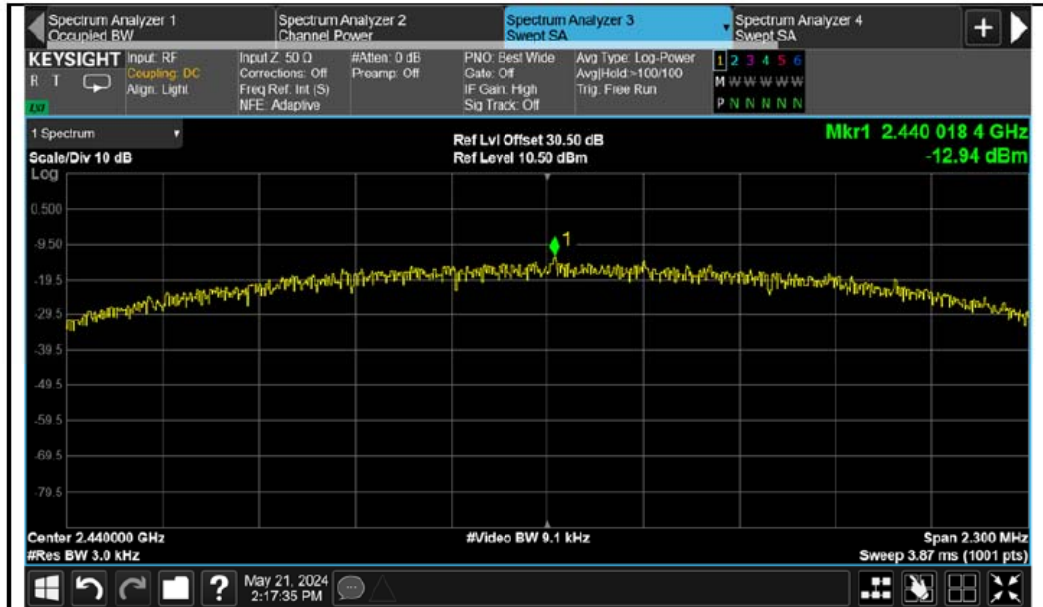

BLE-2440MHz (2Mbps Data Rate)

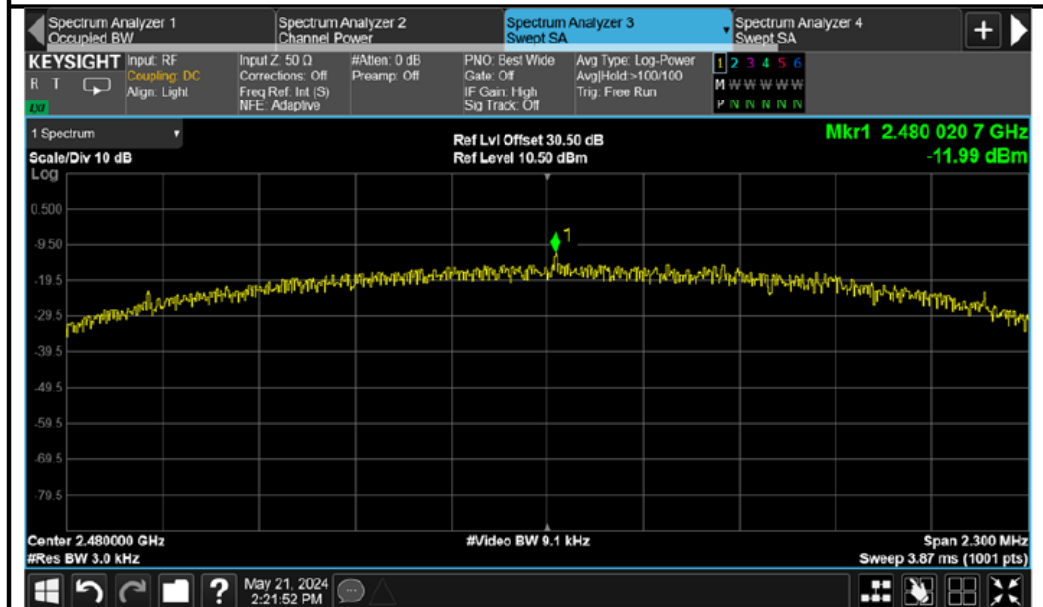

BLE-2480MHz (2Mbps Data Rate)

**Conducted Out of Band Emission Measurement****Limits of Conducted Out of Band Emission Measurement:**


Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth)

**Test Procedure****MEASUREMENT PROCEDURE REF**

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

**MEASUREMENT PROCEDURE OOB**

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

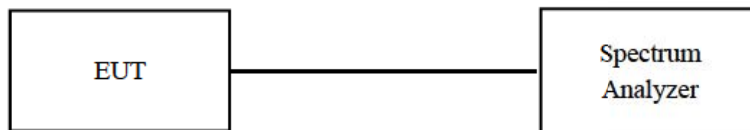**Test Setup**

For the actual test configuration, please refer to the attached file (Test Setup Photo)



**Test Equipment**

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

<b>Test Name:</b> Conducted Out of Band Emission Measurement			<b>Test Date(s):</b> 05/19/2024		
<b>MET Asset #</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Last Cal Date</b>	<b>Cal Due Date</b>
1S2003	EMI Test Receiver	Keysight	N9030B	11/06/2023	11/06/2024
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

Test Result:

Data Rate: 2Mbps



#### **IV. Pictures of test Arrangements**

Please see setup photo file

**END OF REPORT**