

FCC Radio Test Report

FCC ID: 2AXBK-SCV500

Original Grant

Report No. : TB-FCC174961
Applicant : SC Soft Pte Ltd
Equipment Under Test (EUT)
EUT Name : Validator SCV500
Model No. : SCV500
Series Model No. : SCV500+,SCV500EMV
Brand Name : SC Soft
Sample ID : TBBJ-20200628-01#
Receipt Date : 2020-08-01
Test Date : 2020-08-01 to 2020-08-18
Issue Date : 2020-08-19
Standards : FCC Part 15, Subpart C (15.247)
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

The EUT technically complies with the FCC and IC requirements

Test/Witness Engineer : *Garen*
Engineer Supervisor : *IVAN SU*
Engineer Manager : *Ray Lai*



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0

Contents

CONTENTS	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested	6
1.4 Description of Support Units	6
1.5 Description of Test Mode	6
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	8
1.8 Test Facility	9
2. TEST SUMMARY	10
TEST SOFTWARE	10
3. TEST EQUIPMENT	11
4. CONDUCTED EMISSION TEST	12
4.1 Test Standard and Limit	12
4.2 Test Setup	12
4.3 Test Procedure	12
4.4 EUT Operating Mode	13
4.5 Test Data	13
5. RADIATED EMISSION TEST	14
5.1 Test Standard and Limit	14
5.2 Test Setup	15
5.3 Test Procedure	16
5.4 EUT Operating Condition	16
5.5 Test Data	17
6. RESTRICTED BANDS REQUIREMENT	18
6.1 Test Standard and Limit	18
6.2 Test Setup	18
6.3 Test Procedure	18
6.4 EUT Operating Condition	19
6.5 Test Data	19
7. BANDWIDTH TEST	20
7.1 Test Standard and Limit	20
7.2 Test Setup	20
7.3 Test Procedure	20
7.4 EUT Operating Condition	20
7.5 Test Data	20
8. PEAK OUTPUT POWER TEST	21

8.1 Test Standard and Limit.....	21
8.2 Test Setup.....	21
8.3 Test Procedure.....	21
8.4 EUT Operating Condition	21
8.5 Test Data.....	21
9. POWER SPECTRAL DENSITY TEST	22
9.1 Test Standard and Limit.....	22
9.2 Test Setup.....	22
9.3 Test Procedure.....	22
9.4 EUT Operating Condition	22
9.5 Test Data.....	22
10. ANTENNA REQUIREMENT.....	23
10.1 Standard Requirement.....	23
10.2 Antenna Connected Construction.....	23
ATTACHMENT A-- RADIATED EMISSION TEST DATA.....	24
ATTACHMENT B-- RESTRICTED BANDS REQUIREMENT AND BAND-EDGE TEST DATA.....	47
ATTACHMENT C-- BANDWIDTH TEST DATA.....	62
ATTACHMENT D-- PEAK OUTPUT POWER TEST DATA.....	68
ATTACHMENT E-- POWER SPECTRAL DENSITY TEST DATA.....	72

Revision History

Report No.	Version	Description	Issued Date
TB-FCC174961	Rev.01	Initial issue of report	2020-08-19

1. General Information about EUT

1.1 Client Information

Applicant	:	SC Soft Pte Ltd
Address	:	438B Alexandra Road, #01-08 Alexandra Technopark, Singapore 119968, Singapore
Manufacturer	:	SC Soft Pte Ltd
Address	:	438B Alexandra Road, #01-08 Alexandra Technopark, Singapore 119968, Singapore

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Validator SCV500
Models No.	:	SCV500, SCV500+, SCV500EMV
Model Difference	:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name for commercial.
Sample ID	:	TBBJ-20200628-01#
Product Description	Operation Frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz
	Number of Channel:	802.11b/g/n(HT20):11 channels see note(3)
	RF Output Power:	802.11b: 15.315Bm 802.11g: 14.843dBm 802.11n (HT20): 14.735dBm
	Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK, QPSK, 16QAM, 64QAM)
	Antenna Gain:	2dBi Internal Antenna
Power Rating	:	Input Voltage Range: 9 V to 38 V DC
Software Version	:	Android 4.4, Linux 3.4
Hardware Version	:	SCV500+ V2.0.0
Connecting I/O Port(S)	:	Please refer to the User's Manual
Remark	:	The antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.

Note:

- (1) This Test Report is FCC Part 15.247 for 802.11b/g/n, the test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v05.
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.


(3) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		
Note: CH 01~CH 11 for 802.11b/g/n(HT20) CH 03~CH 9 for 802.11n(HT40)					

(4) The Antenna information about the equipment is provided by the applicant

1.3 Block Diagram Showing the Configuration of System Tested

TX Mode

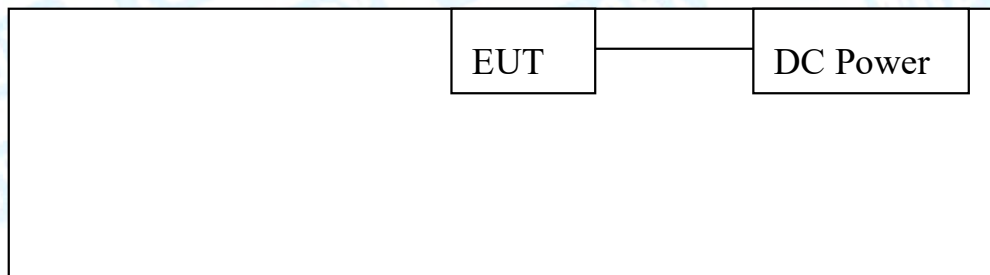

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Note
DC Power Supply	MPS-3005L-3	-----	MATRIX	

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
N/A	N/A

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter + TX Mode B Mode Channel 01/06/11
Mode 2	Adapter + TX Mode G Mode Channel 01/06/11
Mode 3	Adapter + TX Mode N(HT20) Mode Channel 01/06/11
Note : (1)The antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab. (2) For the Conducted Emission and Radiated test used the TBBJ-20200628-01#. For the RF Conduction test used the TBBJ-20200628-01#.	

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.
According to ANSI C63.10 standards, the measurements are performed at the highest, Middle, lowest available channels, and the worst case data rate as follows:
802.11b Mode: CCK (1 Mbps)
802.11g Mode: OFDM (6 Mbps)
802.11n (HT20) Mode: MCS 0 (6.5 Mbps)
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel&Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN.

Test Software Version	xshell 5.exe		
Channel	CH 01	CH 06	CH 11
IEEE 802.11b DSSS	15	15	15
IEEE 802.11g OFDM	17	17	17
IEEE 802.11n (HT20)	17	17	17
Test Software Version	n/a		

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.42 dB ± 3.42 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.40 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 2				
Standard Section FCC	Test Item	Test Sample(s)	Judgment	Remark
15.203	Antenna Requirement	TBBJ-20200628-01#	PASS	N/A
15.207	Conducted Emission	N/A	N/A	N/A
15.205	Restricted Bands	TBBJ-20200628-01#	PASS	N/A
15.247(a)(2)	6dB Bandwidth	TBBJ-20200628-01#	PASS	N/A
15.247(b)	Peak Output Power	TBBJ-20200628-01#	PASS	N/A
15.247(e)	Power Spectral Density	TBBJ-20200628-01#	PASS	N/A
15.247(d)	Band Edge	TBBJ-20200628-01#	PASS	N/A
15.247(d)& 15.209	Transmitter Radiated Spurious Emission	TBBJ-20200628-01#	PASS	N/A
Note: “/” for no requirement for this test item. N/A is an abbreviation for Not Applicable.				

Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFTtest	V2.0.0.0

3. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 12, 2020	Jul. 11, 2021
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 12, 2020	Jul. 11, 2021
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 12, 2020	Jul. 11, 2021
LISN	Rohde & Schwarz	ENV216	101131	Jul. 12, 2020	Jul. 11, 2021
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 12, 2020	Jul. 11, 2021
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 12, 2020	Jul. 11, 2021
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2021
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar.01, 2020	Feb. 28, 2021
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Aug.07, 2020	Aug. 06, 2021
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 07, 2020	Jul. 06, 2021
Pre-amplifier	Sonoma	310N	185903	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	HP	8449B	3008A00849	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Jul. 27, 2020	Jul. 26, 2021
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 07, 2020	Mar. 06, 2021
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 12, 2020	Jul. 11, 2021
Spectrum Analyzer	Rohde & Schwarz	ESCI	100010/007	Jul. 12, 2020	Jul. 11, 2021
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 16, 2019	Sep. 15, 2020
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 16, 2019	Sep. 15, 2020
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 16, 2019	Sep. 15, 2020
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 16, 2019	Sep. 15, 2020

4. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard
FCC Part 15.207

4.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

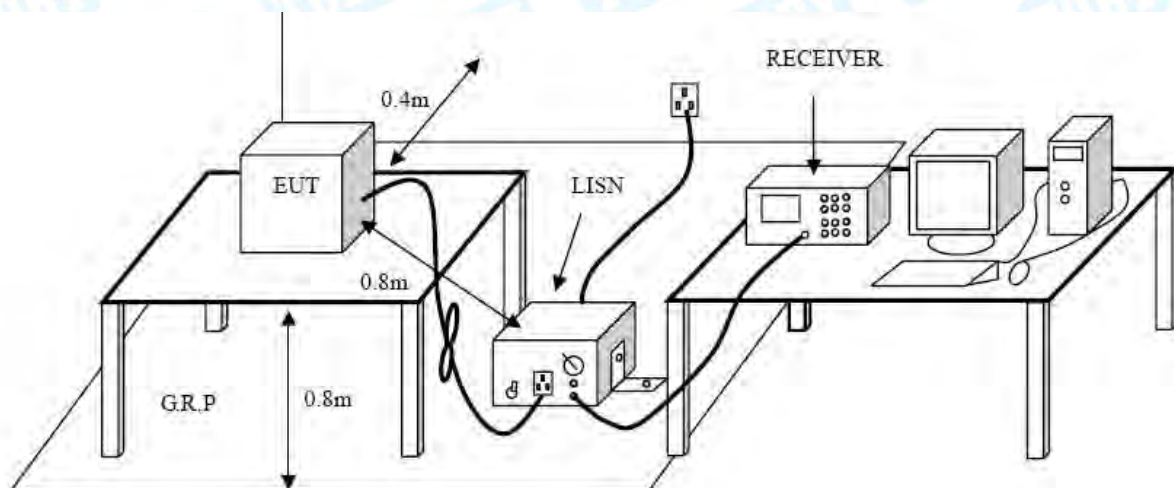

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

4.4 EUT Operating Mode

Please refer to the description of test mode.

4.5 Test Data

Not applicable. The power supply mode of this equipment is DC.

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.209

5.1.2 Test Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Emission Limit (Above 1000MHz)


Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54

Note:


(1) The tighter limit applies at the band edges.

(2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


5.2 Test Setup

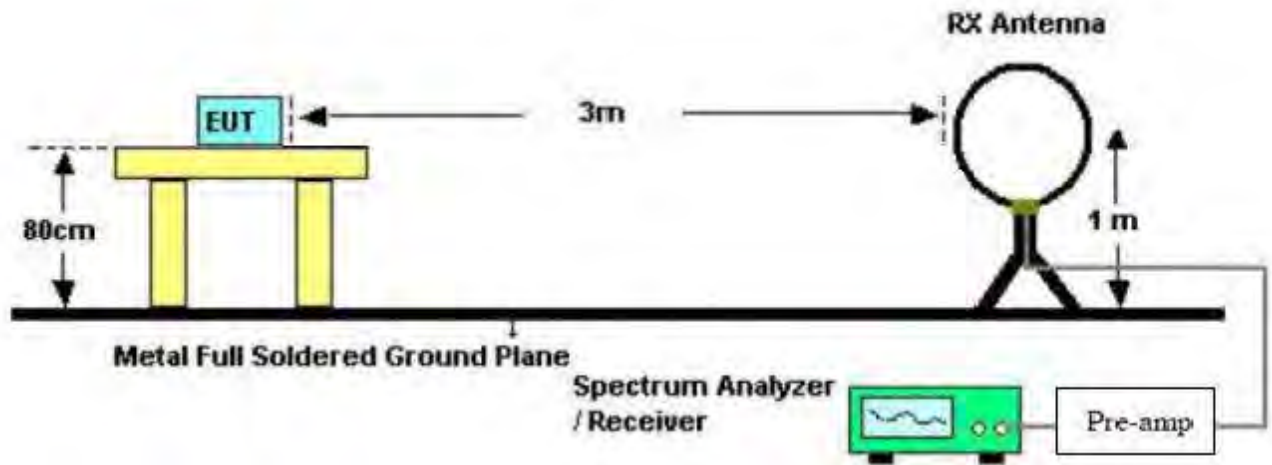

Below 30MHz Test Setup

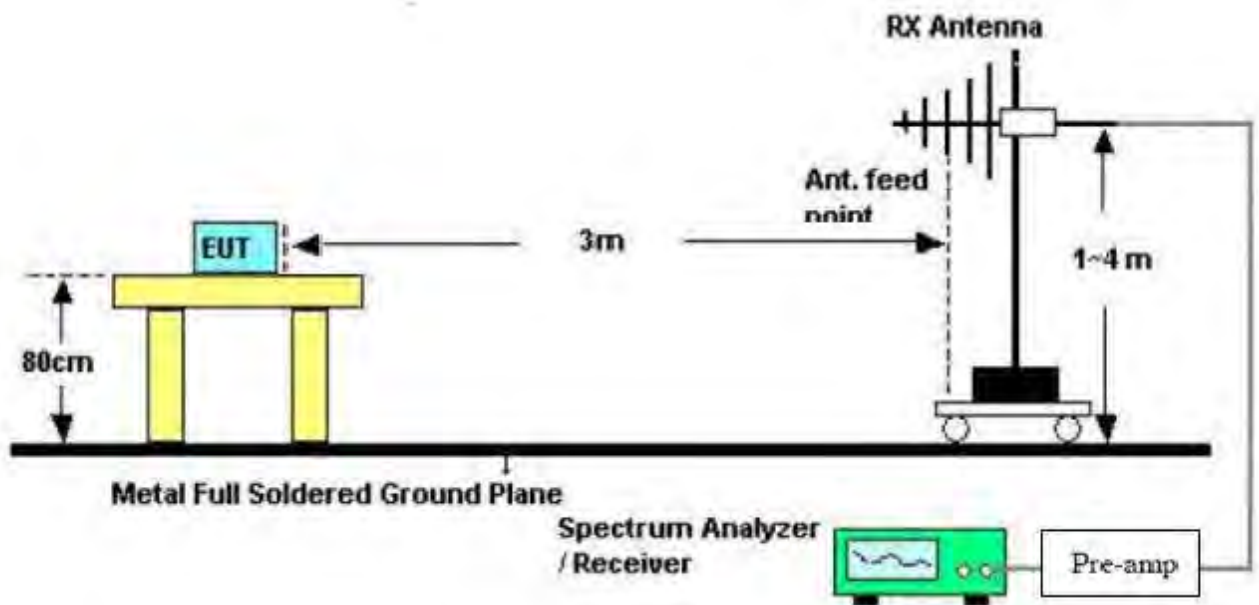

Below 1000MHz Test Setup

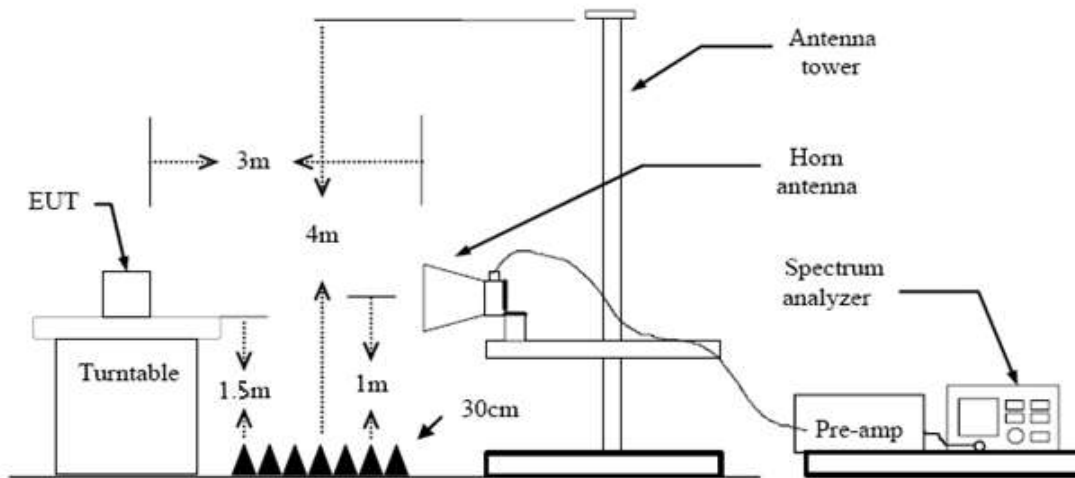

Above 1GHz Test Setup

5.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment A.

- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

6.5 Test Data

Please refer to the Attachment B.

7. Bandwidth Test

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.247 (a)(2)

7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

7.2 Test Setup



7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

7.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Digital photo framesdle and high channel for the test.

7.5 Test Data

Please refer to the Attachment C.

8. Peak Output Power Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.247 (b)

8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

8.2 Test Setup

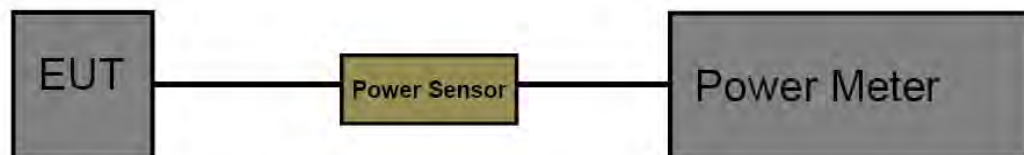

8.3 Test Procedure

The measurement is according to section 9.1.2 of KDB 558074 D01 DTS Meas Guidance v05. The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

8.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

8.5 Test Data

Please refer to the Attachment D.

9. Power Spectral Density Test

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247 (e)

9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

9.2 Test Setup



9.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

9.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Digital photo framesdle and high channel for the test.

9.5 Test Data

Please refer to the Attachment E.

10. Antenna Requirement

10.1 Standard Requirement

10.1.1 Standard

FCC Part 15.203

10.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

10.2 Antenna Connected Construction

The gains of the antenna used for transmitting is 2dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

Result

The EUT antenna is a Internal Antenna. It complies with the standard requirement.

Antenna Type
☒ Permanent attached antenna
☐ Unique connector antenna
☐ Professional installation antenna

Attachment A-- Radiated Emission Test Data

9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only worst case is reported.		



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		74.6569	49.95	-22.96	26.99	40.00	-13.01	QP
2	*	175.6516	60.28	-20.28	40.00	43.50	-3.50	QP
3	!	224.5193	59.19	-18.61	40.58	46.00	-5.42	QP
4		374.6225	37.65	-13.49	24.16	46.00	-21.84	QP
5		499.4247	40.16	-10.48	29.68	46.00	-16.32	QP
6	!	750.1083	48.11	-6.60	41.51	46.00	-4.49	QP

*:Maximum data x:Over limit !:over margin


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only worst case is reported.		

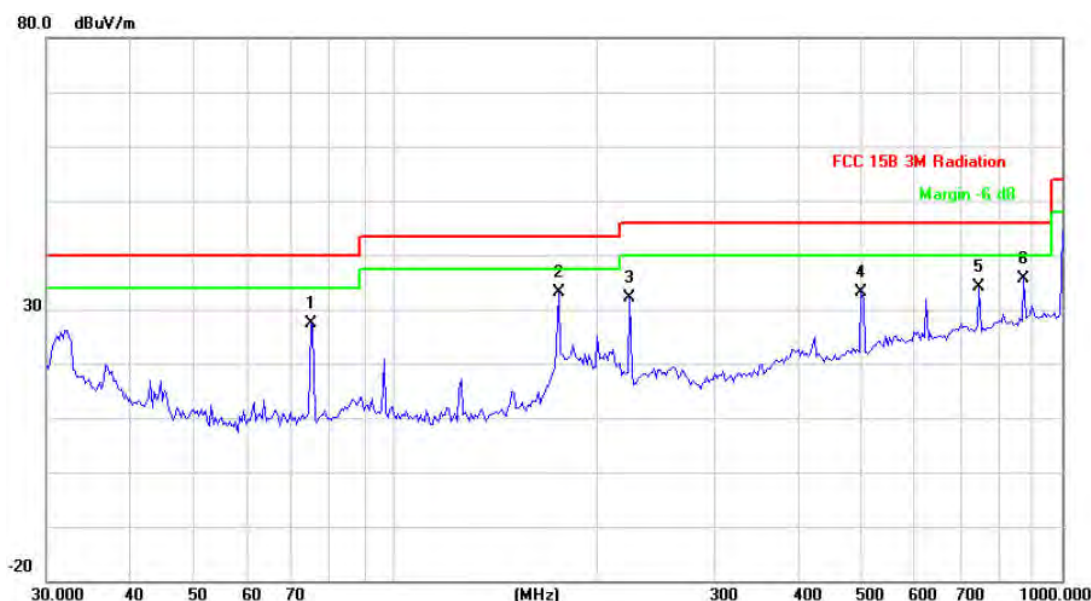

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		74.6569	50.37	-22.96	27.41	40.00	-12.59	QP
2	*	175.6516	53.46	-20.28	33.18	43.50	-10.32	QP
3		224.5193	50.86	-18.61	32.25	46.00	-13.75	QP
4		499.4247	43.64	-10.48	33.16	46.00	-12.84	QP
5		750.1083	40.77	-6.60	34.17	46.00	-11.83	QP
6		875.2470	40.59	-5.06	35.53	46.00	-10.47	QP

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. QuasiPeak (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = QuasiPeak (dBuV/m)-Limit QPK(dBuV/m)

Above 1GHz

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4823.935	47.08	13.49	60.57	74.00	-13.43 peak
2	*	4823.935	33.00	13.49	46.49	54.00	-7.51 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4824.012	48.63	13.49	62.12	74.00	-11.88	peak
2	*	4824.012	34.07	13.49	47.56	54.00	-6.44	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2437MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1		4873.458	47.80	13.54	61.34	74.00	-12.66 peak
2	*	4873.458	33.28	13.54	46.82	54.00	-7.18 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2437MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4873.430	47.91	13.54	61.45	74.00	-12.55	peak
2	*	4873.430	33.99	13.54	47.53	54.00	-6.47	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4924.066	48.99	13.58	62.57	74.00	-11.43 peak
2	*	4924.066	33.06	13.58	46.64	54.00	-7.36 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4923.082	46.53	13.15	59.68	74.00	-14.32	peak
2	*	4923.532	37.09	13.15	50.24	54.00	-3.76	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4824.072	46.11	12.54	58.65	74.00	-15.35 peak
2	*	4824.078	30.13	12.54	42.67	54.00	-11.33 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4822.824	43.84	12.54	56.38	74.00	-17.62	peak
2	*	4823.814	31.67	12.54	44.21	54.00	-9.79	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2437MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2437MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit. Only show the worst case ANT. A.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4874.870	30.73	12.85	43.58	54.00	-10.42	AVG
2		4875.260	42.50	12.86	55.36	74.00	-18.64	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%				
Test Voltage:	DC 12V						
Ant. Pol.	Horizontal						
Test Mode:	TX G Mode 2462MHz						
Remark:	No report for the emission which more than 15dB below the prescribed limit.						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4923.922	44.34	13.58	57.92	74.00	-16.08 peak
2	*	4923.922	29.05	13.58	42.63	54.00	-11.37 AVG
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4923.424	49.70	13.58	63.28	74.00	-10.72	peak
2	*	4923.424	34.84	13.58	48.42	54.00	-5.58	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2412MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4823.259	31.78	13.49	45.27	54.00	-8.73	AVG
2		4823.334	46.77	13.49	60.26	74.00	-13.74	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%				
Test Voltage:	DC 12V						
Ant. Pol.	Vertical						
Test Mode:	TX n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 15dB below the prescribed limit.						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4823.758	43.29	13.49	56.78	74.00	-17.22 peak
2	*	4823.922	28.03	13.49	41.52	54.00	-12.48 AVG
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2437MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4873.604	32.00	13.54	45.54	54.00	-8.46	AVG
2		4873.672	48.25	13.54	61.79	74.00	-12.21	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2437MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4873.348	42.96	13.54	56.50	74.00	-17.50	peak
2	*	4873.517	27.94	13.54	41.48	54.00	-12.52	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2462MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2462MHz		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.358	28.14	13.58	41.72	54.00	-12.28	AVG
2		4924.660	47.78	13.58	61.36	74.00	-12.64	peak

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)


Conducted RF Spurious Emission Test Data

Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 12V		
Test Mode:	TX B Mode		
Remark:	This report only shall the worst case mode for TX IEEE 802.11b.		

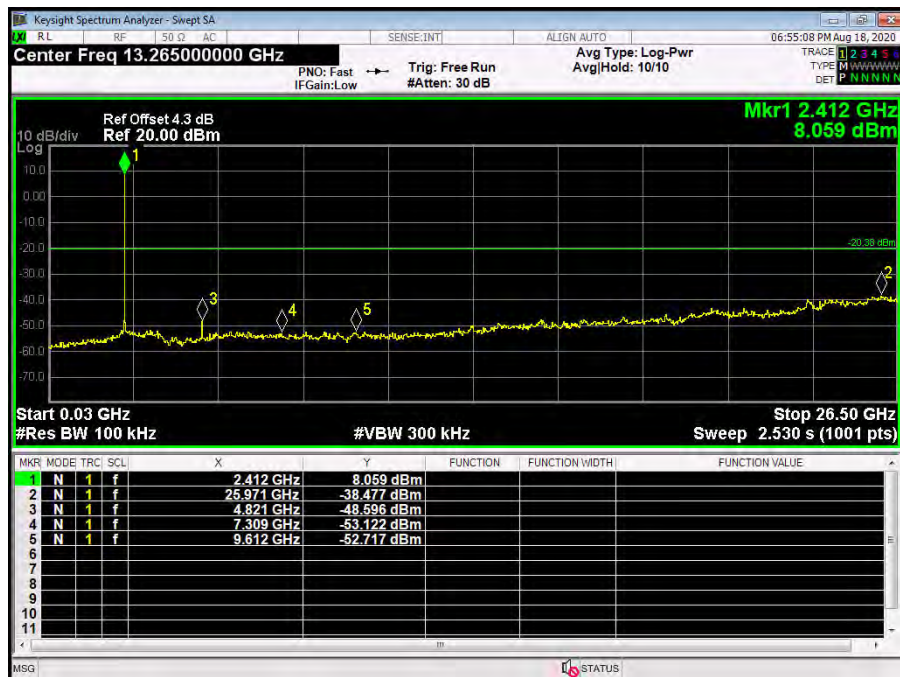2412 MHz**0.03GHz-25GHz**


2437 MHz

0.03GHz-25GHz

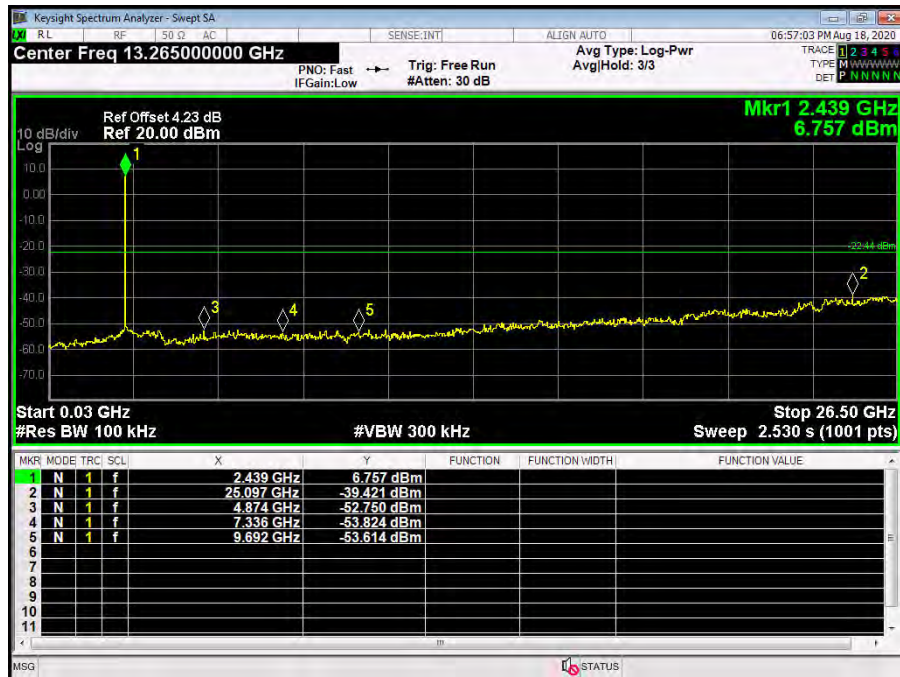

2462 MHz

0.03GHz-25GHz

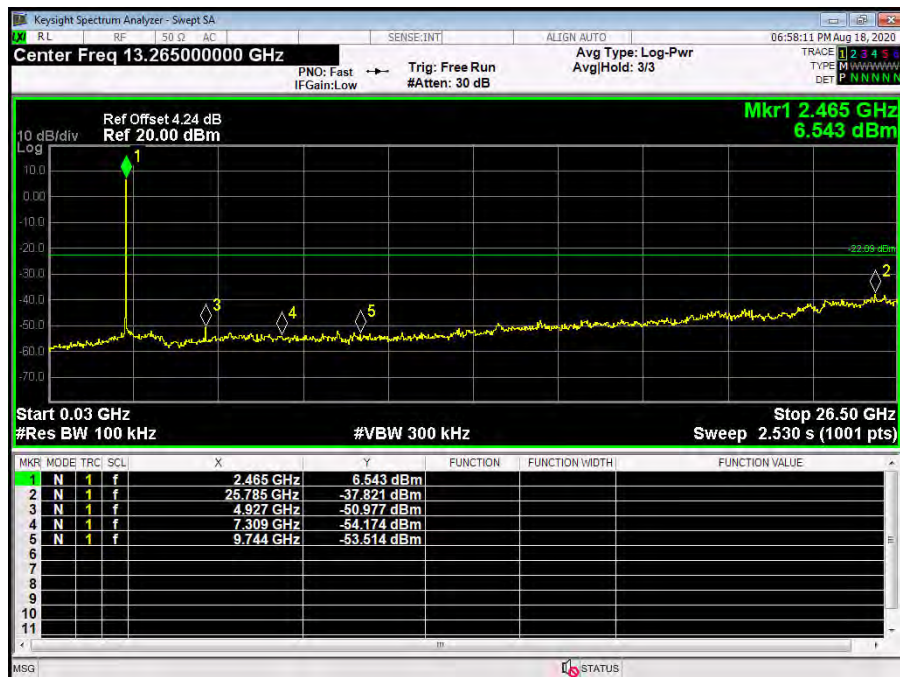

Attachment B-- Restricted Bands Requirement and Band-edge Test Data

(1) Radiation Test

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	N/A		

120.0 dBuV/m

70

(RF) FCC PART 15C (PEAK)

(RF) FCC PART 15C (AVG)


20.0

2327.00 2337.00 2347.00 2357.00 2367.00 2377.00 2387.00 2397.00 2407.00 2427.00 MHz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	49.37	1.28	50.65	74.00	-23.35	peak
2		2390.000	39.37	1.28	40.65	54.00	-13.35	AVG
3	*	2413.000	103.91	1.40	105.31	Fundamental Frequency		AVG
4	X	2413.560	113.40	1.41	114.81	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	N/A		

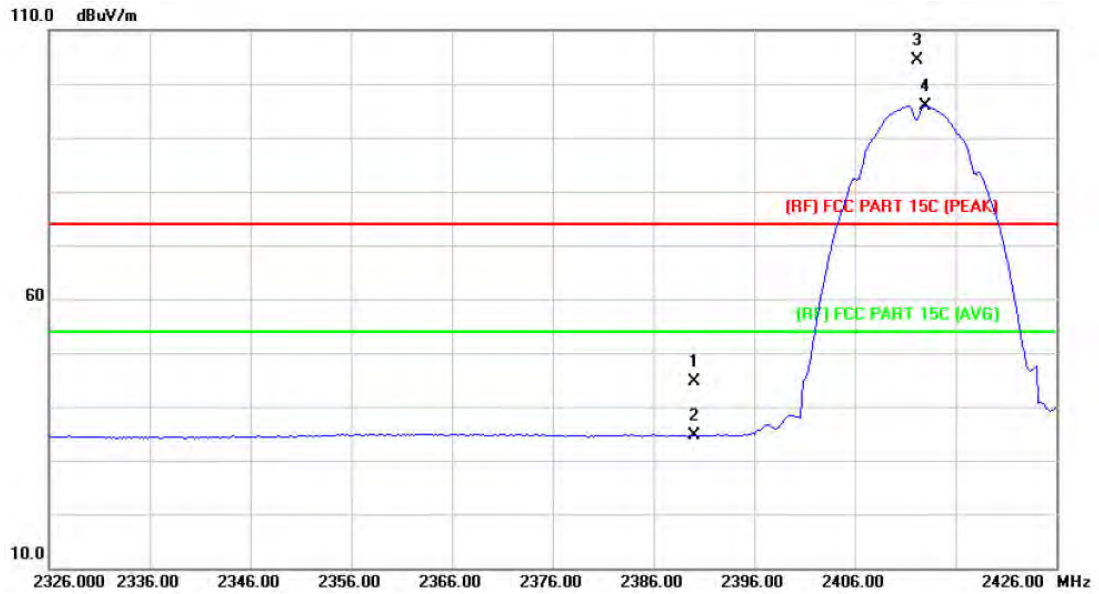

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		2390.000	43.35	1.28	44.63	74.00	-29.37 peak
2		2390.000	33.35	1.28	34.63	54.00	-19.37 AVG
3	X	2412.260	102.98	1.39	104.37	Fundamental Frequency peak	
4	*	2413.000	94.47	1.40	95.87	Fundamental Frequency AVG	

Emission Level= Read Level+ Correct Factor


Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz		
Remark:	N/A		

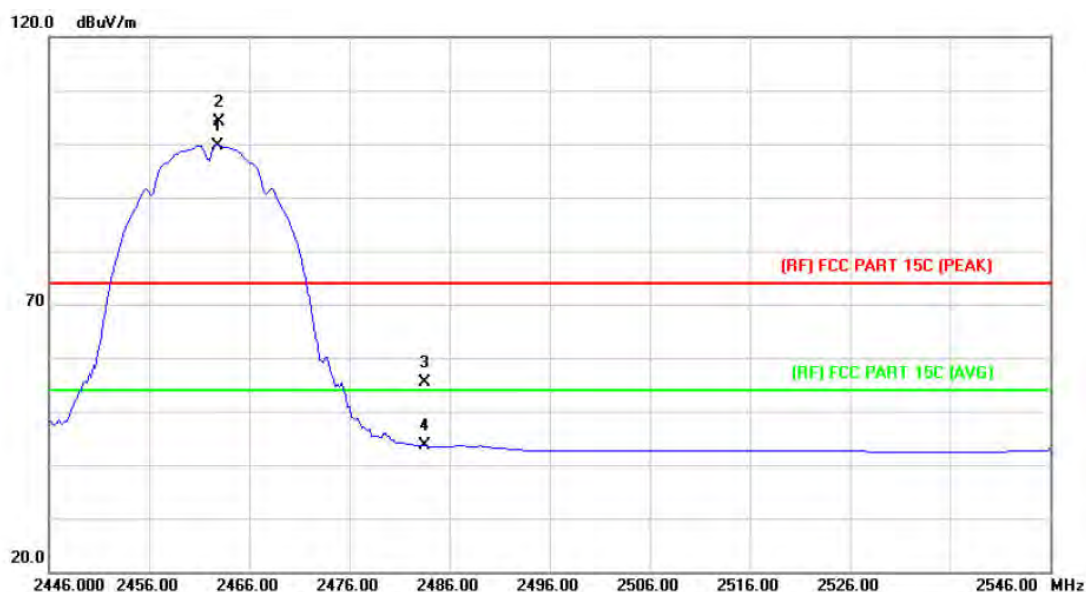

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2462.800	96.48	3.27	99.75	Fundamental Frequency		AVG
2	X	2463.000	100.75	3.27	104.02	Fundamental Frequency		peak
3		2483.500	52.02	3.41	55.43	74.00	-18.57	peak
4		2483.500	40.13	3.41	43.54	54.00	-10.46	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz		
Remark:	N/A		

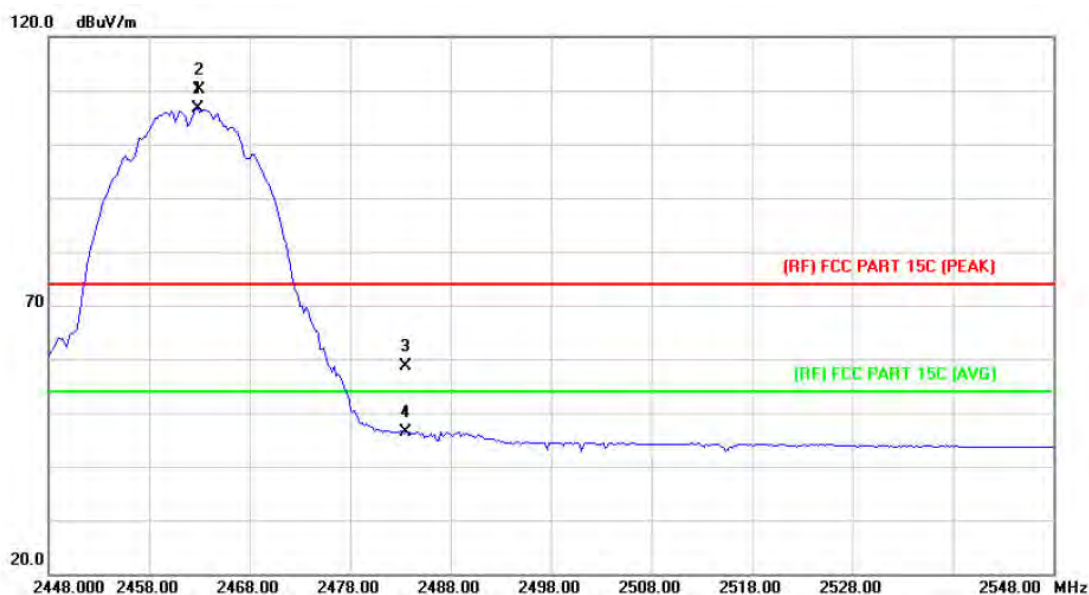

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2462.800	103.30	3.27	106.57	Fundamental Frequency		AVG
2	X	2463.000	106.98	3.27	110.25	Fundamental Frequency		peak
3		2483.500	55.33	3.41	58.74	74.00	-15.26	peak
4		2483.500	42.97	3.41	46.38	54.00	-7.62	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz		
Remark:	N/A		

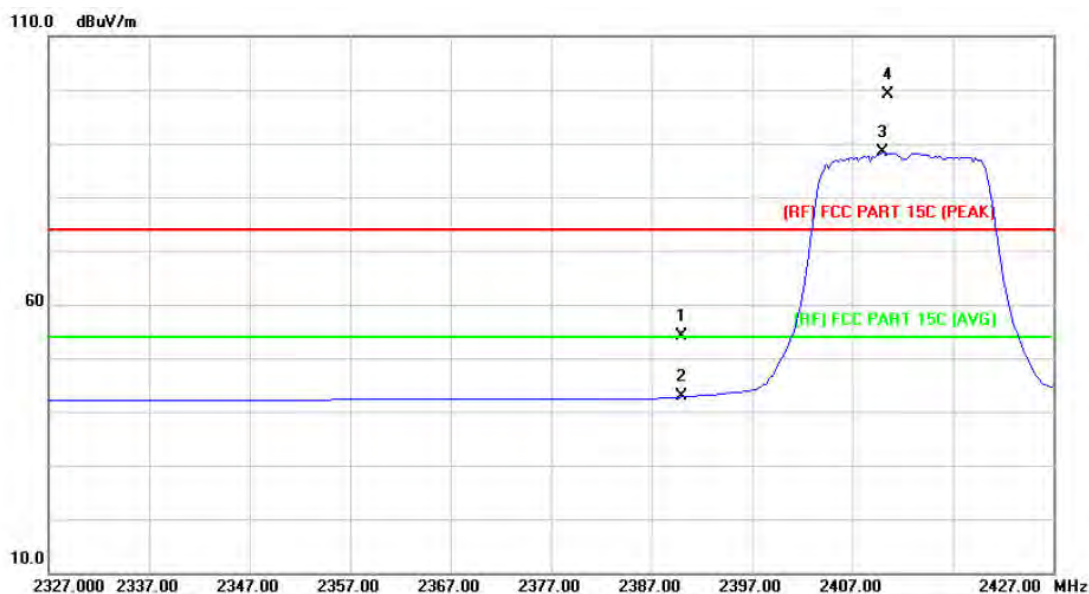

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	51.30	2.82	54.12	74.00	-19.88	peak
2		2390.000	40.01	2.82	42.83	54.00	-11.17	AVG
3	*	2410.000	85.43	2.93	88.36	Fundamental Frequency		AVG
4	X	2410.600	96.19	2.93	99.12	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz		
Remark:	N/A		

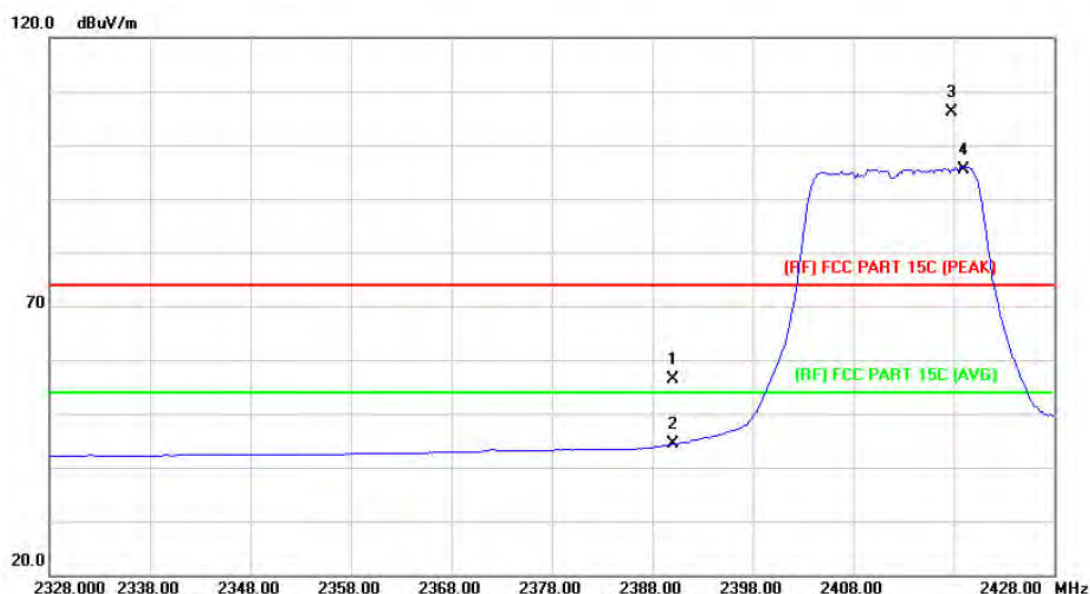

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		2390.000	53.56	2.82	56.38	74.00	-17.62 peak
2		2390.000	41.50	2.82	44.32	54.00	-9.68 AVG
3	X	2417.800	103.16	2.98	106.14	Fundamental Frequency	peak
4	*	2419.000	92.47	2.98	95.45	Fundamental Frequency	AVG


Emission Level= Read Level+ Correct Factor

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz		
Remark:	N/A		

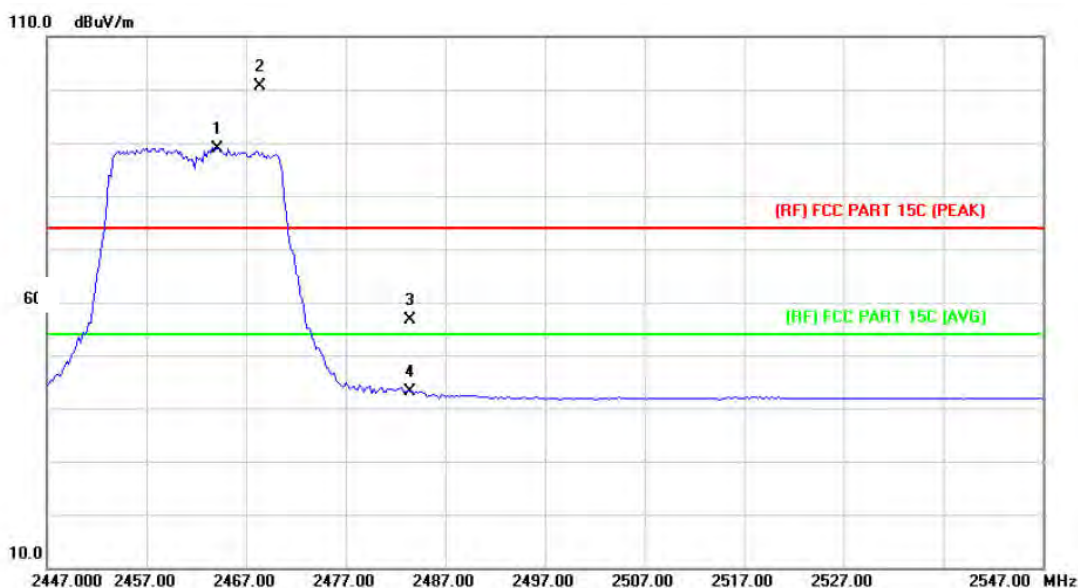


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2464.200	85.70	3.28	88.98	Fundamental Frequency		AVG
2	X	2468.400	97.27	3.31	100.58	Fundamental Frequency		peak
3		2483.500	53.34	3.41	56.75	74.00	-17.25	peak
4		2483.500	39.72	3.41	43.13	54.00	-10.87	AVG

Emission Level= Read Level+ Correct Factor

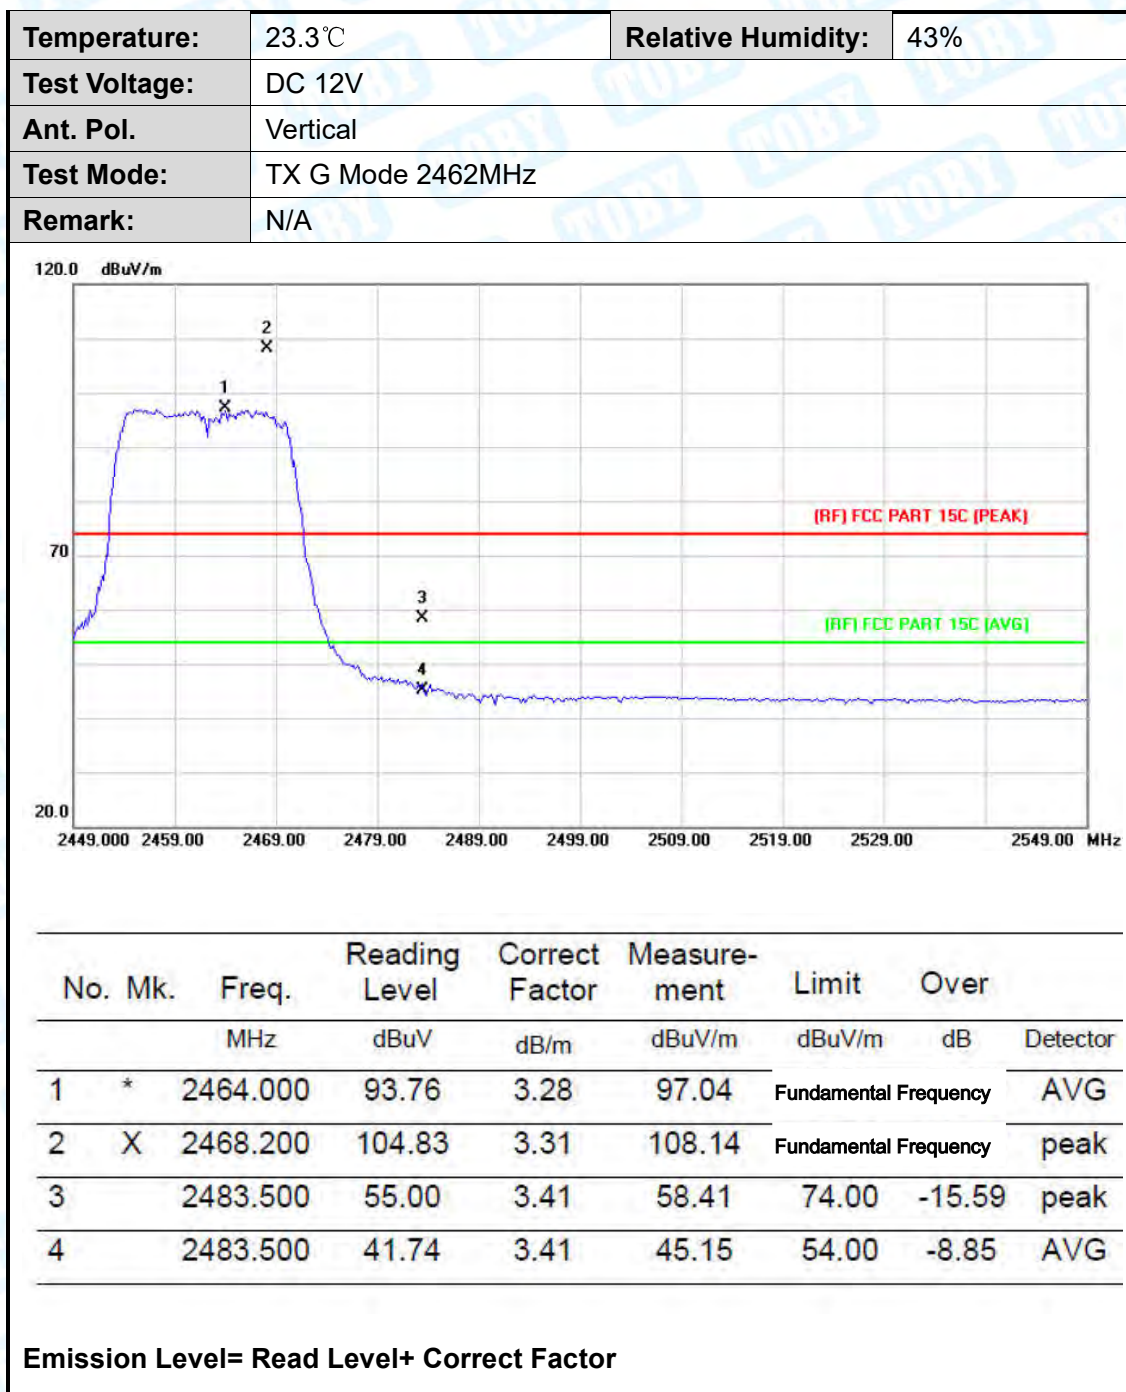


Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	N/A		

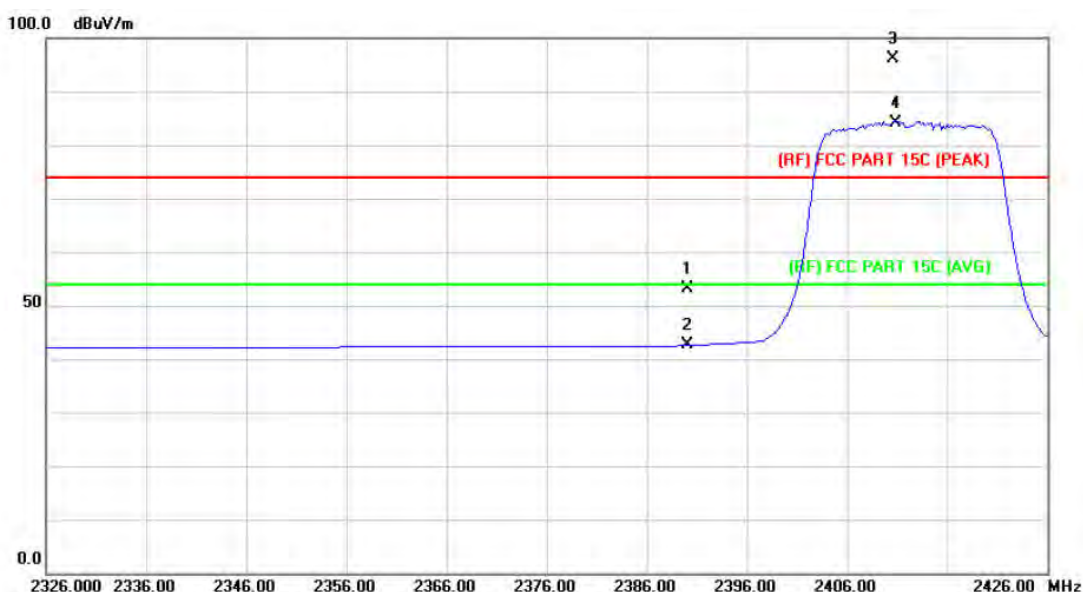

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	50.34	2.82	53.16	74.00	-20.84	peak
2		2390.000	39.81	2.82	42.63	54.00	-11.37	AVG
3	X	2410.600	93.22	2.93	96.15	Fundamental Frequency		peak
4	*	2410.800	81.32	2.93	84.25	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	N/A		

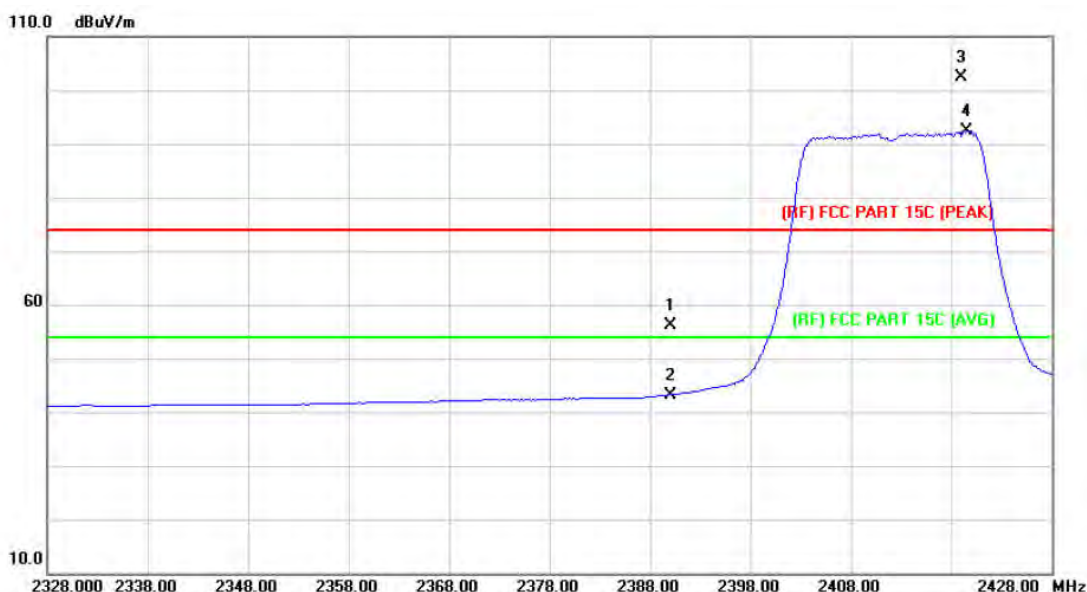

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	53.32	2.82	56.14	74.00	-17.86	peak
2		2390.000	40.42	2.82	43.24	54.00	-10.76	AVG
3	X	2419.000	99.33	2.98	102.31	Fundamental Frequency		peak
4	*	2419.600	89.48	2.99	92.47	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	N/A		

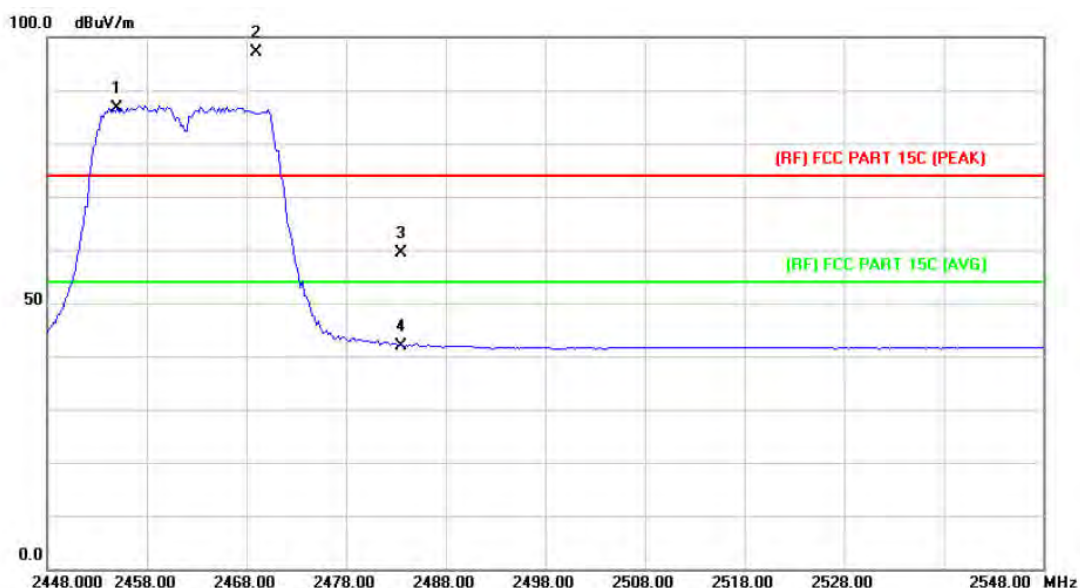

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2455.000	83.39	3.22	86.61	Fundamental Frequency		AVG
2	X	2469.000	93.81	3.31	97.12	Fundamental Frequency		peak
3		2483.500	56.00	3.41	59.41	74.00	-14.59	peak
4		2483.500	38.53	3.41	41.94	54.00	-12.06	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	N/A		

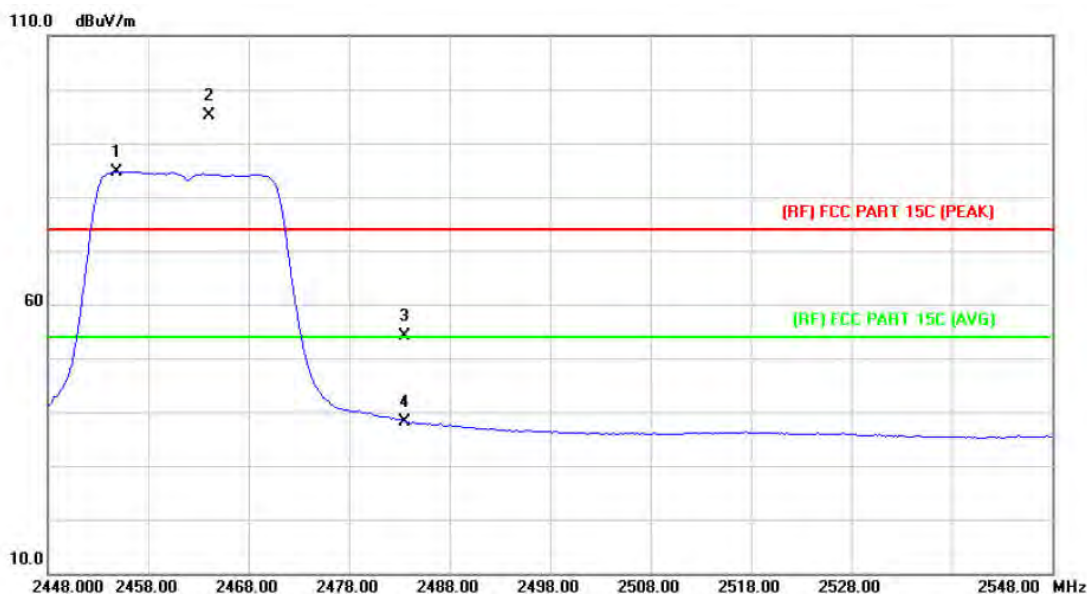


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	*	2454.800	81.51	3.22	84.73	Fundamental Frequency	AVG
2	X	2464.000	91.89	3.28	95.17	Fundamental Frequency	peak
3		2483.500	50.74	3.41	54.15	74.00	-19.85 peak
4		2483.500	34.70	3.41	38.11	54.00	-15.89 AVG



Emission Level= Read Level+ Correct Factor

(2) Conducted Test

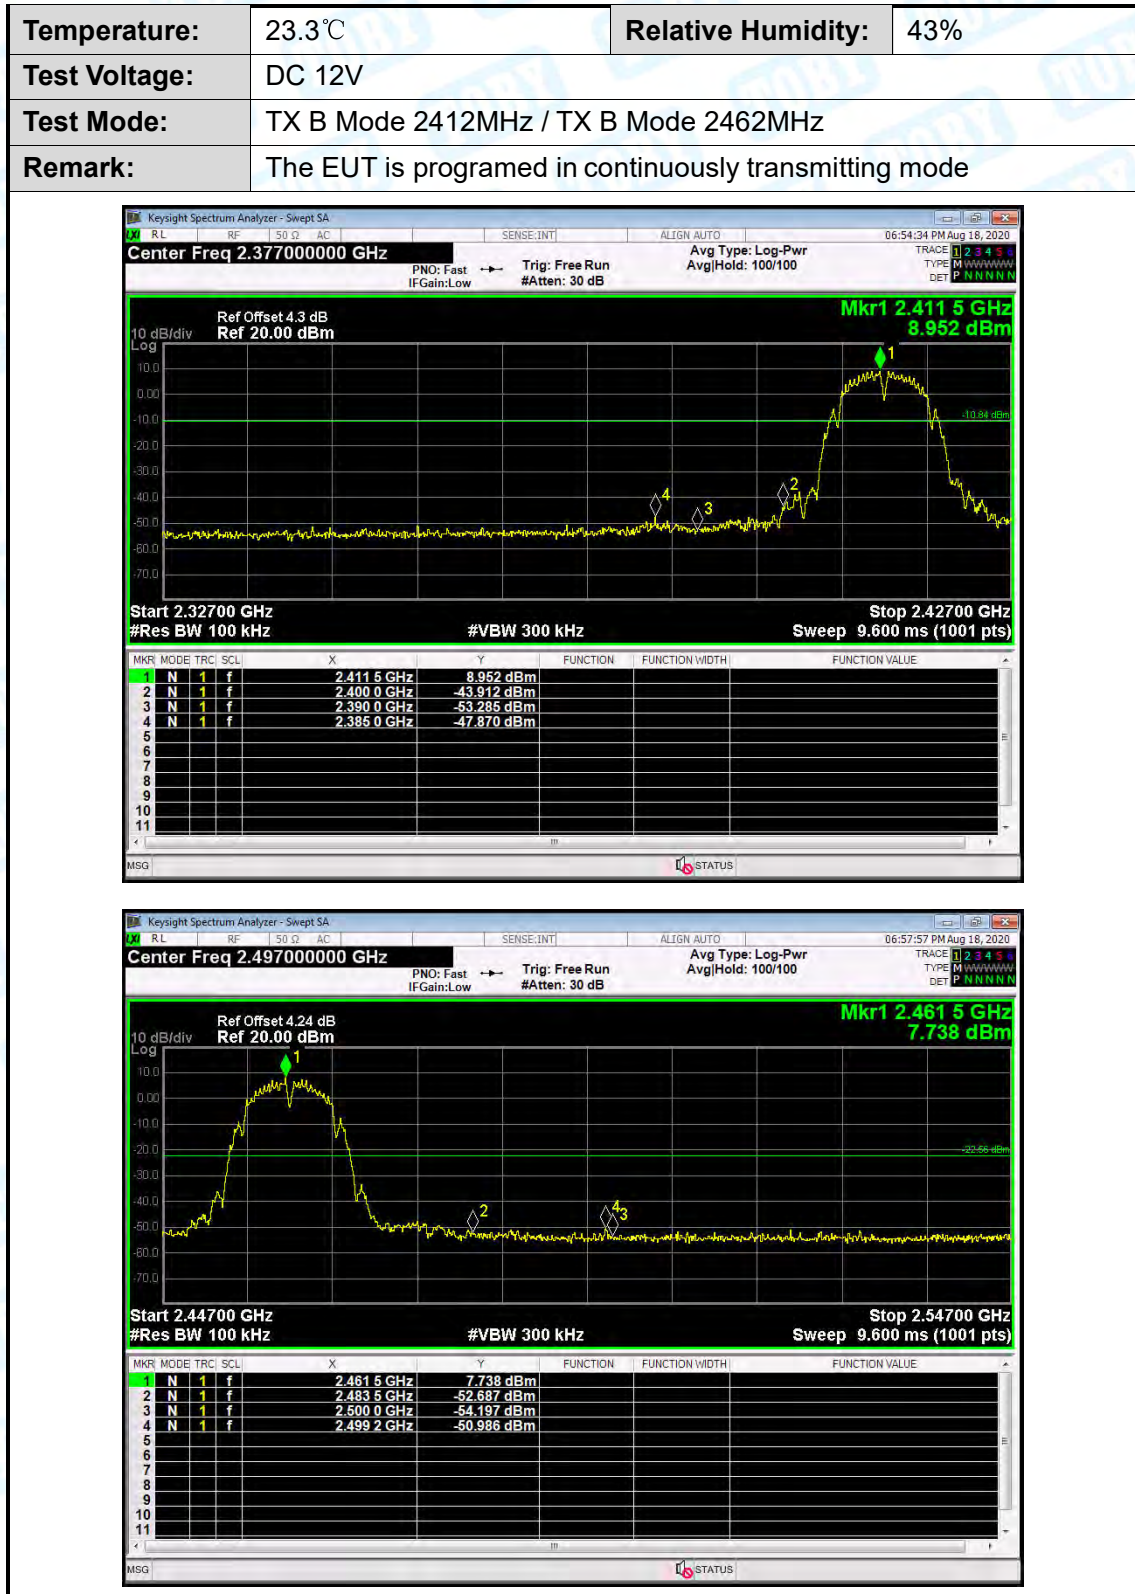

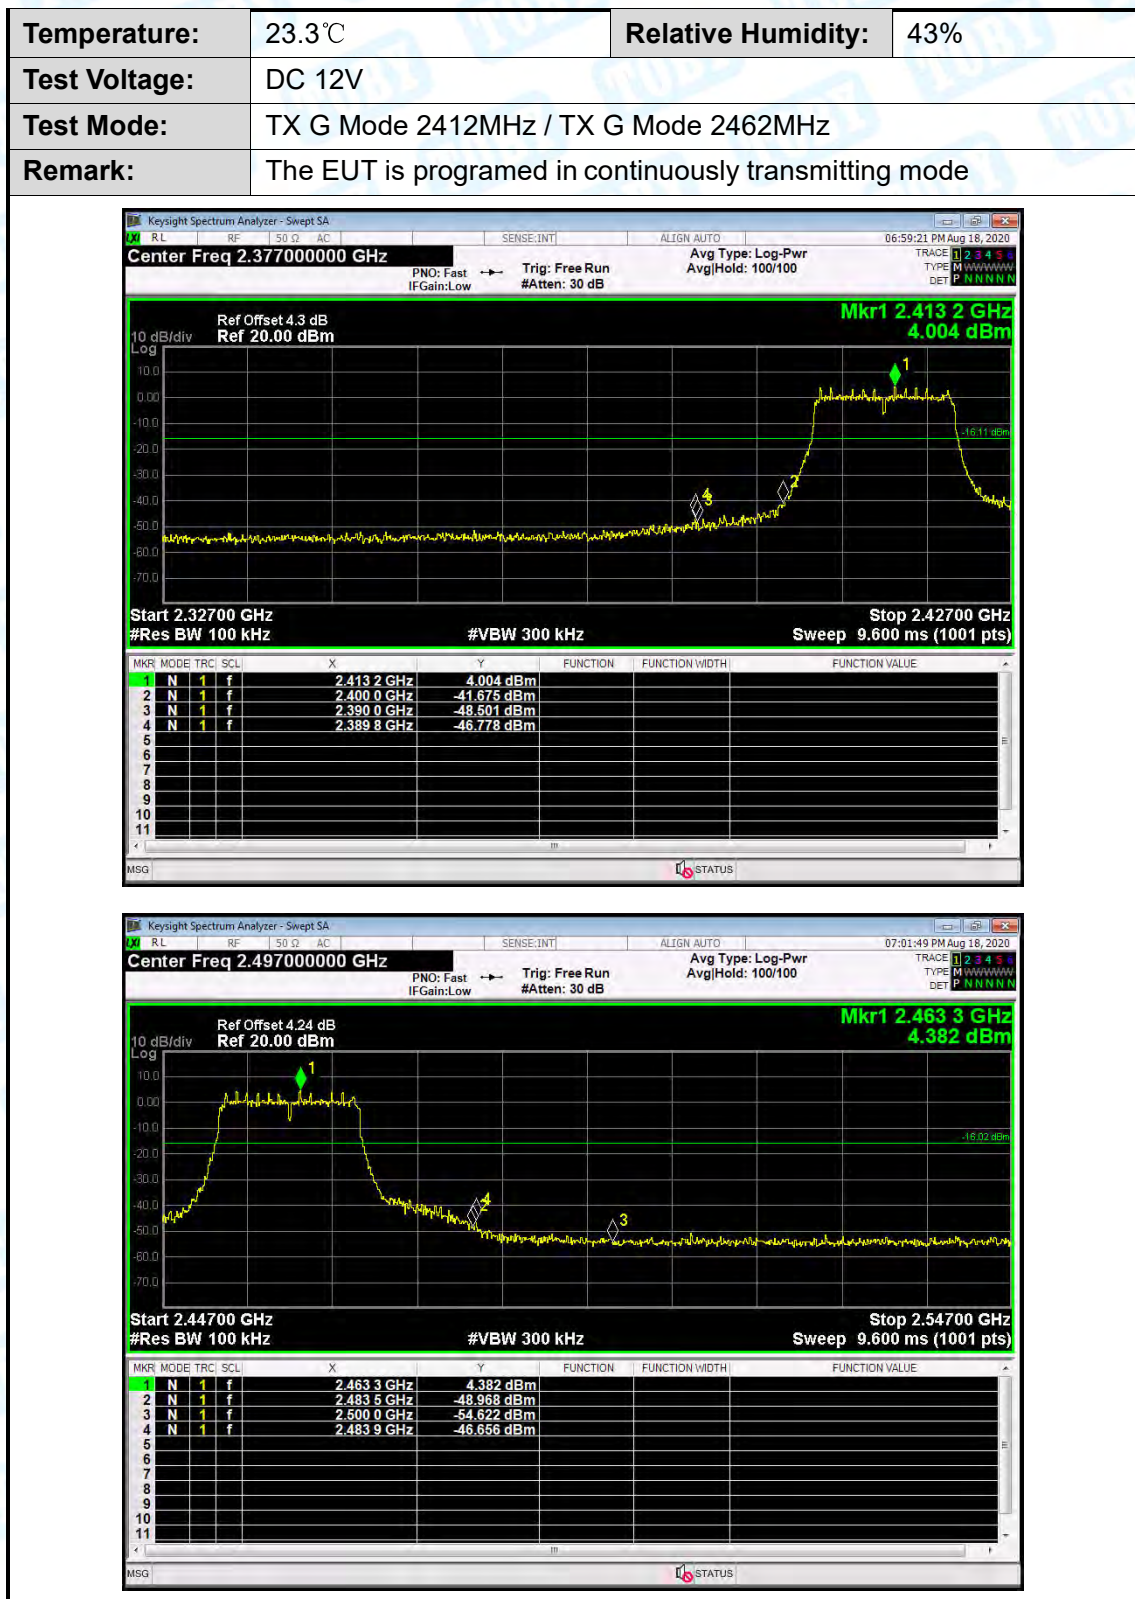

Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 12V		
Test Mode:	TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz		
Remark:	The EUT is programed in continuously transmitting mode		

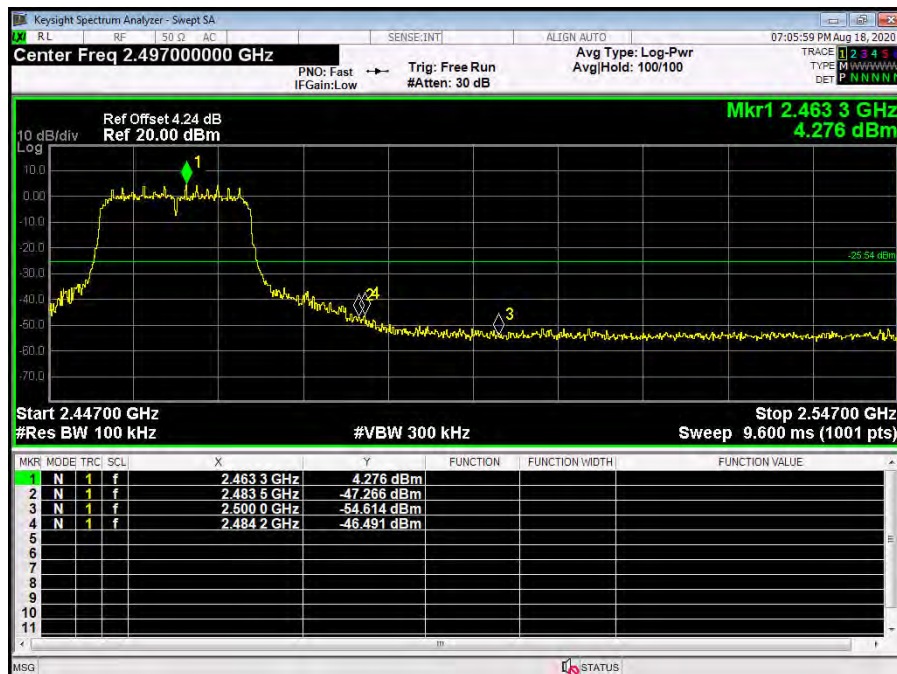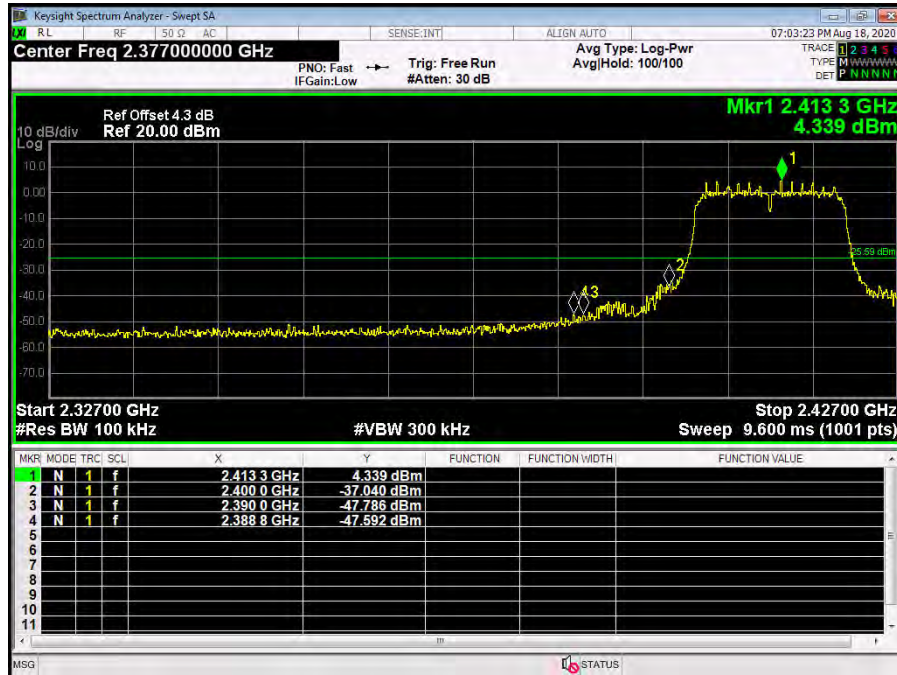

Attachment C-- Bandwidth Test Data

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Test Mode:	TX 802.11B Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	
2412	8.067	>=0.5	
2437	7.111		
2462	8.077		
802.11B Mode			
2412 MHz			

Keysight Spectrum Analyzer - Occupied BW

RL

RF

50 G

AC

SENSE:INT

ALIGN AUTO

06:54:15 PM Aug 18, 2020

Center Freq 2.412000000 GHz

Center Freq: 2.412000000 GHz

Trig: Free Run

#Atten: 30 dB

Avg/Hold: 100/100

Radio Std: None

#FGain:Low

Radio Device: BTS

Ref Offset 4.3 dB

Ref 24.30 dBm

Mkr3 2.416023 GHz

5.1384 dBm

10 dB/div

Log

14.3

4.30

-5.70

-15.7

-25.7

-35.7

-45.7

-55.7

-65.7

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 30 MHz

Sweep 3.333 ms

Occupied Bandwidth

10.524 MHz

Total Power

24.9 dBm

Transmit Freq Error

-10.597 kHz

% of OBW Power

99.00 %

x dB Bandwidth

8.067 MHz

x dB


-6.00 dB

MSG

STATUS


802.11B Mode

2437 MHz

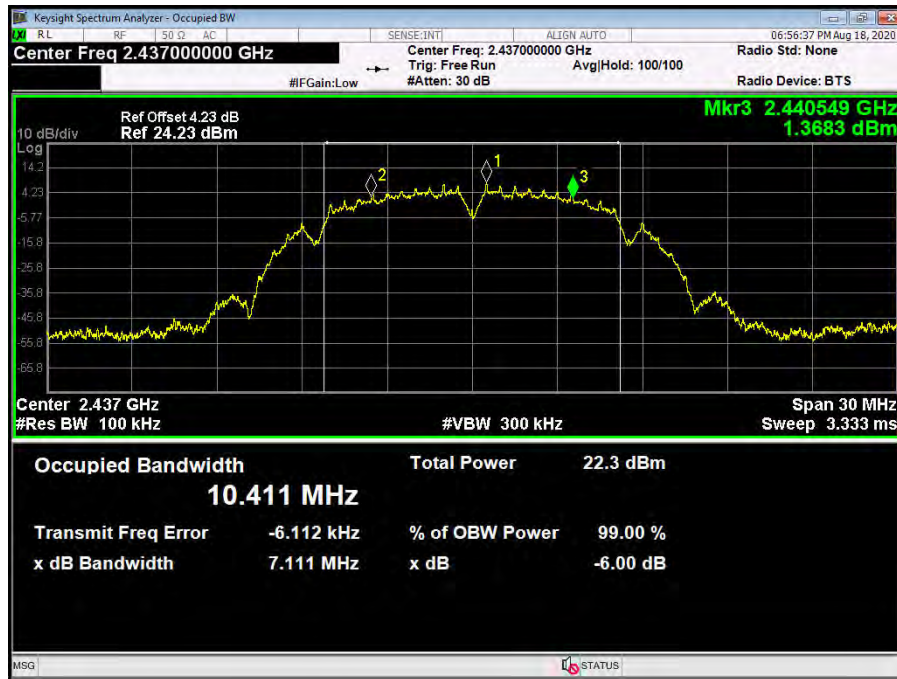

802.11B Mode

2462 MHz

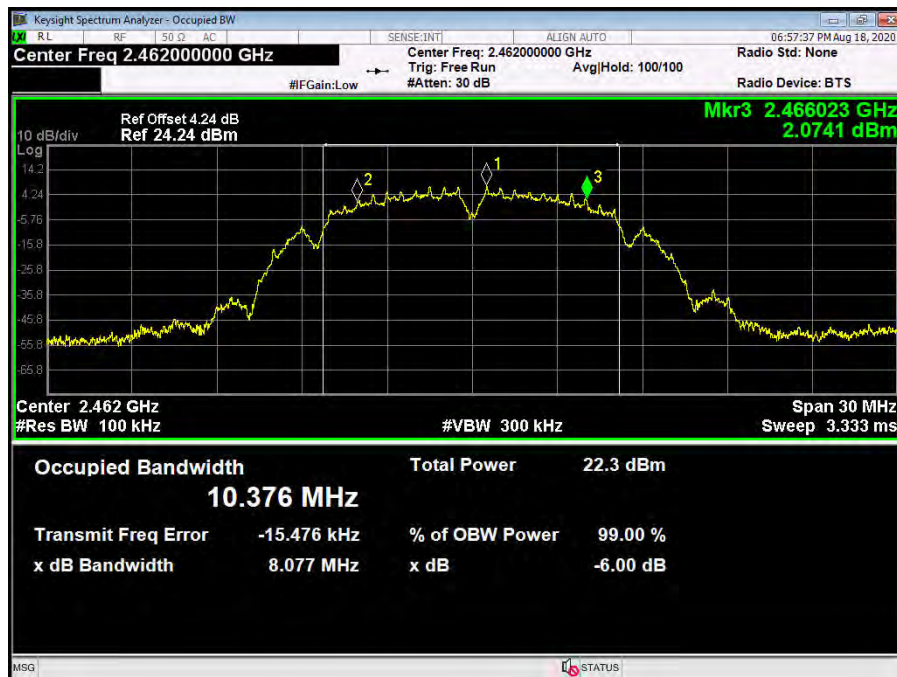

Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 12V		
Test Mode:	TX 802.11G Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	
2412	15.805	>=0.5	
2437	15.79		
2462	15.819		
802.11G Mode			
2412 MHz			

Keysight Spectrum Analyzer - Occupied BW

RL

RF

50 Ω

AC

SENSE:INT

ALIGN AUTO

06:59:01 PM Aug 18, 2020

Center Freq 2.412000000 GHz

Center Freq: 2.412000000 GHz

Trig: Free Run

Avg/Hold: 100/100

Radio Std: None

#IF Gain: Low

#Atten: 30 dB

Radio Device: BTS

Ref Offset 4.3 dB

Ref 24.30 dBm

Mkr3 2.419897 GHz

-1.9502 dBm

10 dB/div

Log

14.3

4.30

-5.70

-15.7

-25.7

-35.7

-45.7

-55.7

-65.7

2

1

3

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 30 MHz

Sweep 3.333 ms

Occupied Bandwidth

16.309 MHz

Total Power

21.0 dBm

Transmit Freq Error

-5.770 kHz

% of OBW Power

99.00 %

x dB Bandwidth

15.80 MHz

x dB


-6.00 dB

MSG

STATUS


802.11G Mode

2437 MHz

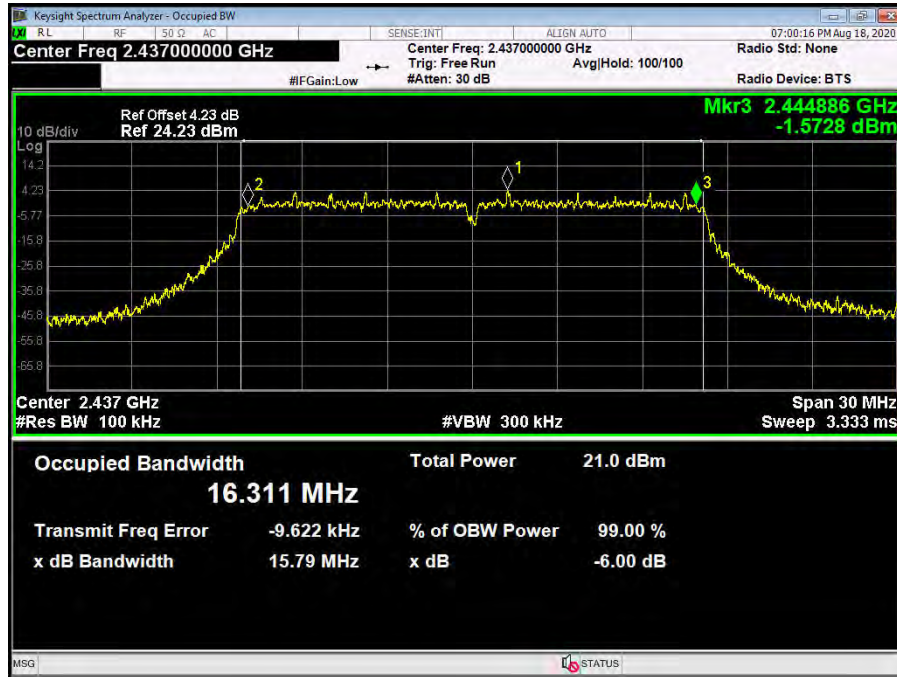


802.11G Mode

2462 MHz

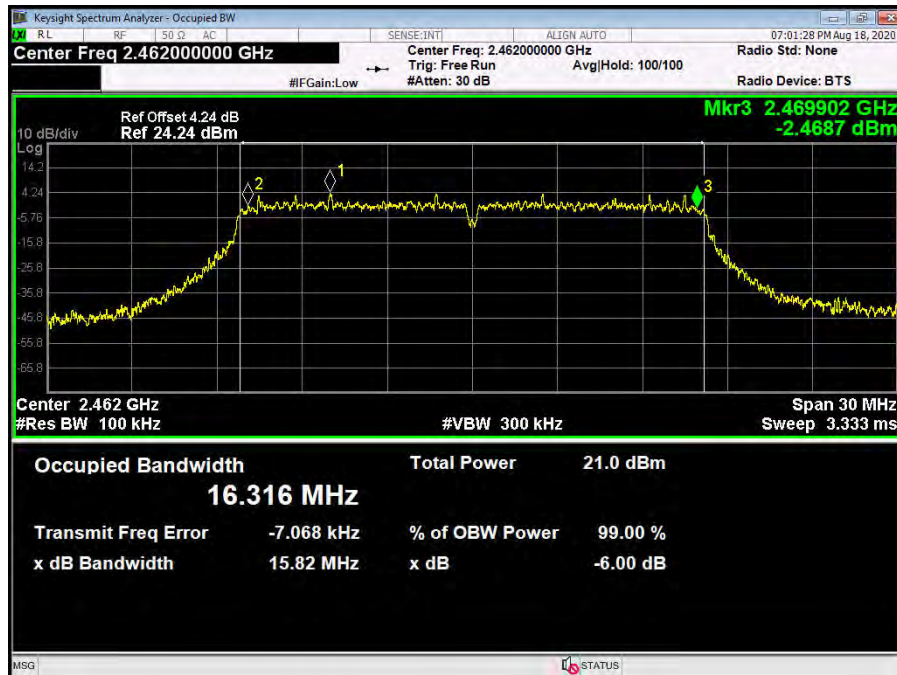

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Test Mode:	TX 802.11N(HT20) Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	
2412	15.810	>=0.5	
2437	16.273		
2462	16.029		
802.11N(HT20) Mode			
2412 MHz			

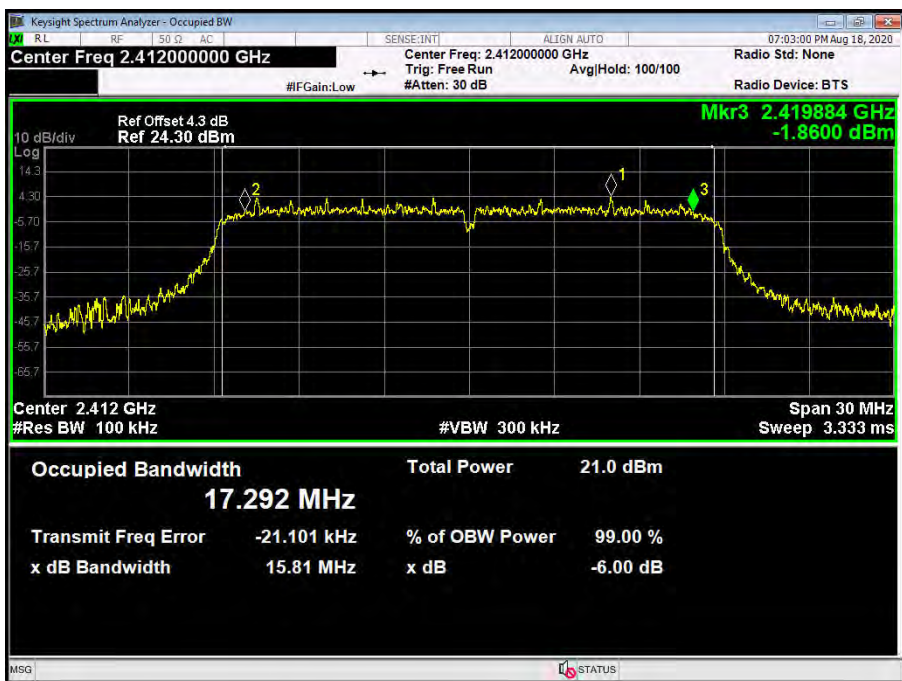

Keysight Spectrum Analyzer - Occupied BW

Center Freq 2.412000000 GHz

Center Freq: 2.412000000 GHz

Trig: Free Run

Avg/Hold: 100/100

Radio Std: None

#IFGain: Low

#Atten: 30 dB

Radio Device: BTS

Ref Offset 4.3 dB

Ref 24.30 dBm

Mkr3 2.419884 GHz

-1.8600 dBm

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 30 MHz

Sweep 3.333 ms

Occupied Bandwidth

17.292 MHz

Total Power

21.0 dBm

Transmit Freq Error

-21.101 kHz

% of OBW Power

99.00 %

x dB Bandwidth


15.81 MHz

x dB

-6.00 dB


802.11N(HT20) Mode

2437 MHz

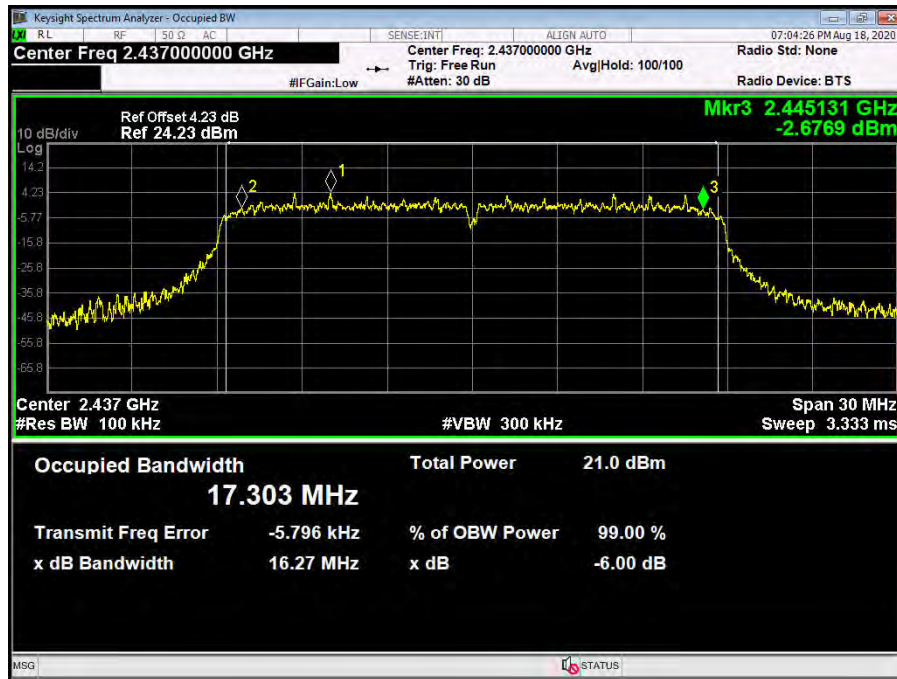

802.11N(HT20) Mode

2462 MHz

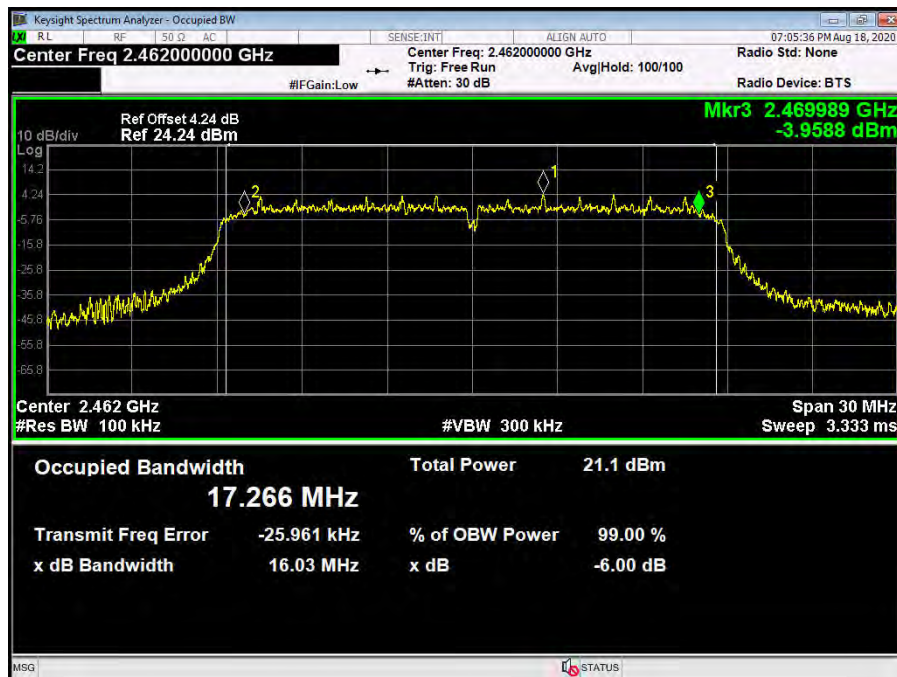


Attachment D-- Peak Output Power Test Data


Test Conditions:		Continuous Transmitting Mode	
Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Mode	Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)
802.11b	2412	15.315	30
	2437	15.302	
	2462	15.270	
802.11g	2412	14.730	
	2437	14.745	
	2462	14.843	
802.11n (HT20)	2412	14.735	
	2437	14.543	
	2462	14.673	
Result: PASS			

Duty Cycle		
Mode	Channel frequency (MHz)	Test Result
802.11b	2412	>98%
	2437	
	2462	
802.11g	2412	
	2437	
	2462	
802.11n (HT20)	2412	
	2437	
	2462	
Please see below plots		


802.11 B Mode 2437 MHz

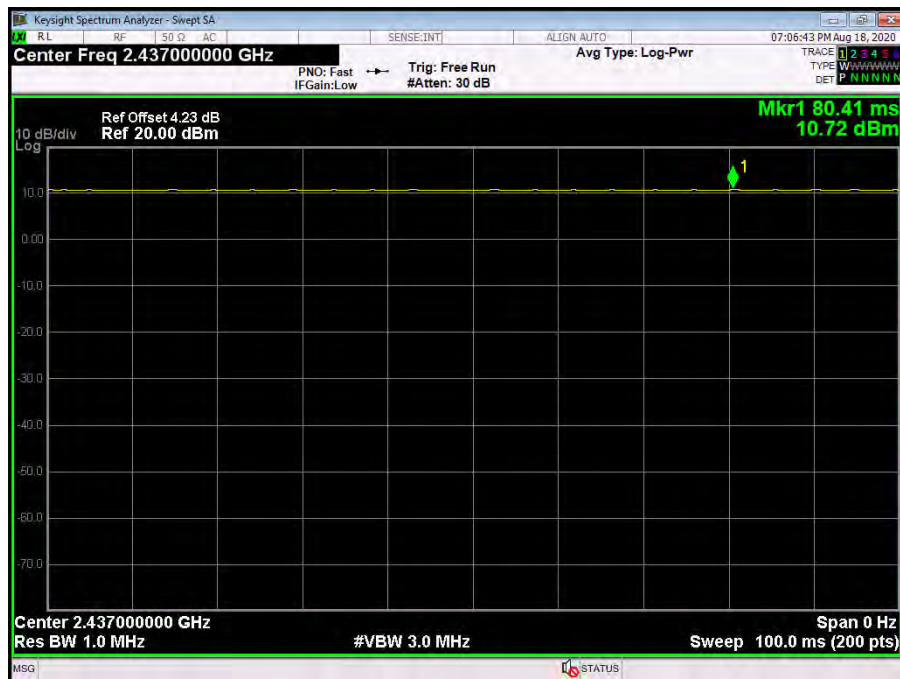

802.11 G Mode 2437 MHz

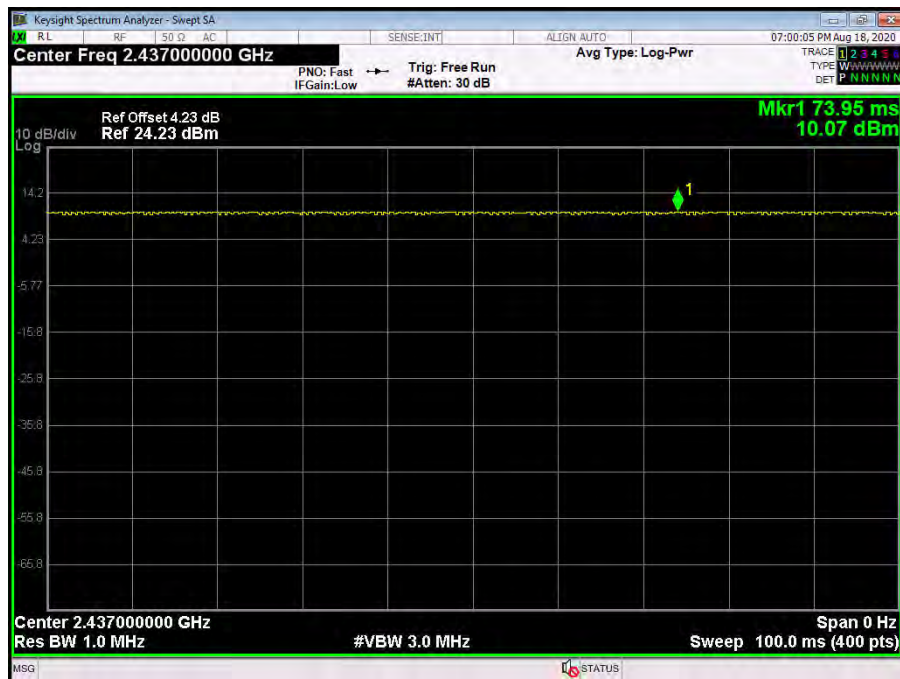

802.11 N20 Mode 2437 MHz

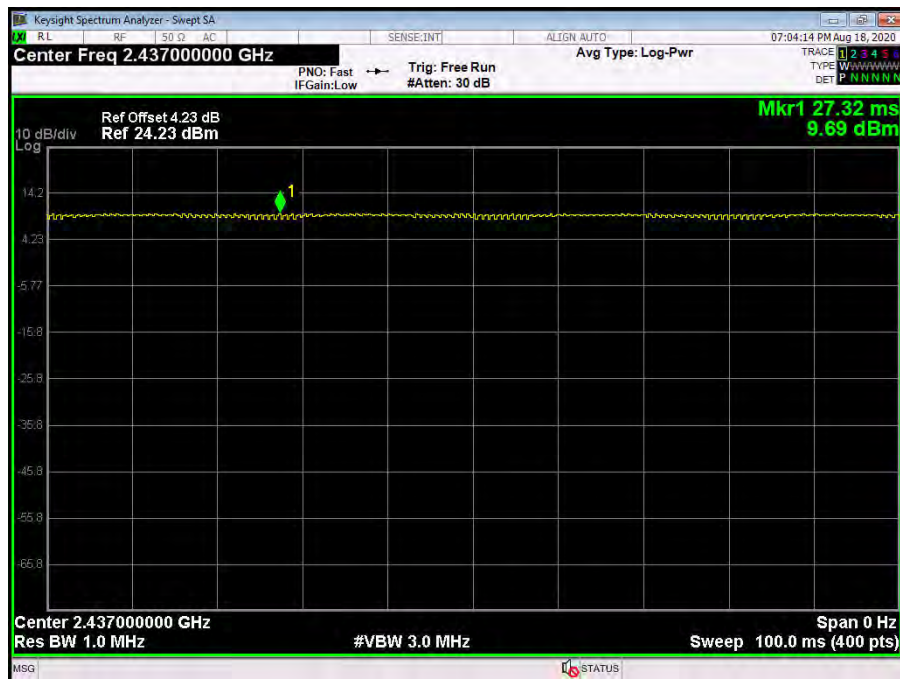

Attachment E-- Power Spectral Density Test Data

Temperature:	23.3℃	Relative Humidity:	43%
Test Voltage:	DC 12V		
Test Mode:	TX 802.11B Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2412	-4.839	8	
2437	-6.964		
2462	-7.146		
802.11B Mode			
2412 MHz			

Keysight Spectrum Analyzer - Swept SA

R.L.

RF

150 GHz

AC

SENSE:INT

ALIGN AUTO

06:54:28 PM Aug 18, 2020

Center Freq 2.41200000 GHz

PNO: Fast

IFGain:Low

Trig: Free Run

#Atten: 30 dB

Avg Type: Log-Pwr

AvgHold: 3/3

TRACE 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

Ref Offset 4.3 dB

Ref 20.00 dBm

Mkr1 2.412 63 GHz

-4.839 dBm

10 dB/div

Log

Center 2.41200 GHz

#Res BW 3.0 kHz

#VBW 10 kHz

Sweep 3.163 s (1001 pts)

MSG

STATUS

802.11B Mode


2437 MHz



802.11B Mode


2462 MHz



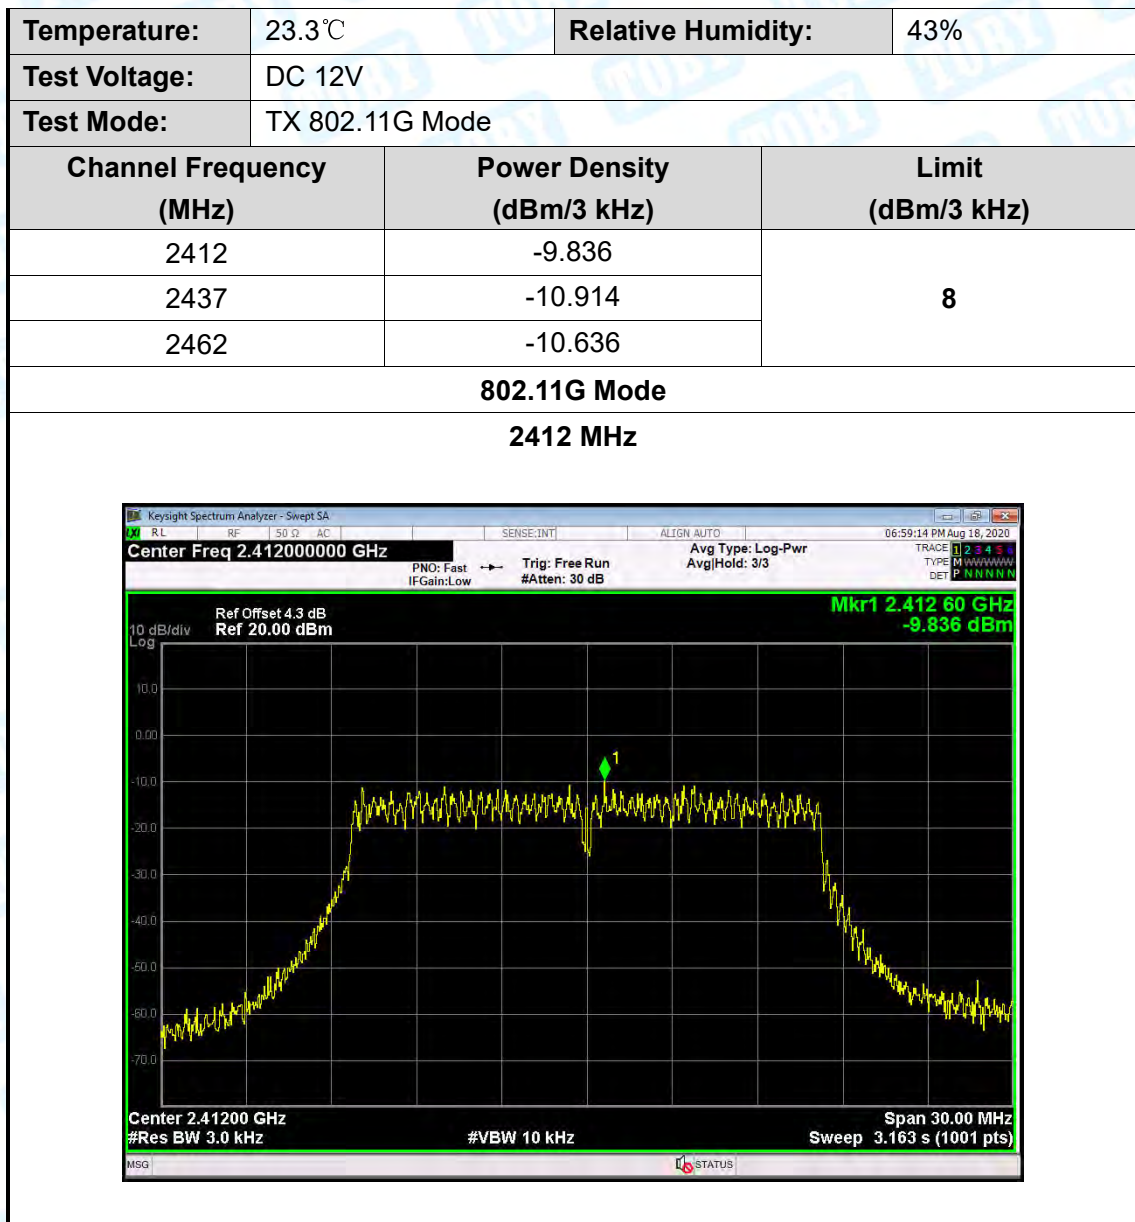


802.11G Mode


2437 MHz

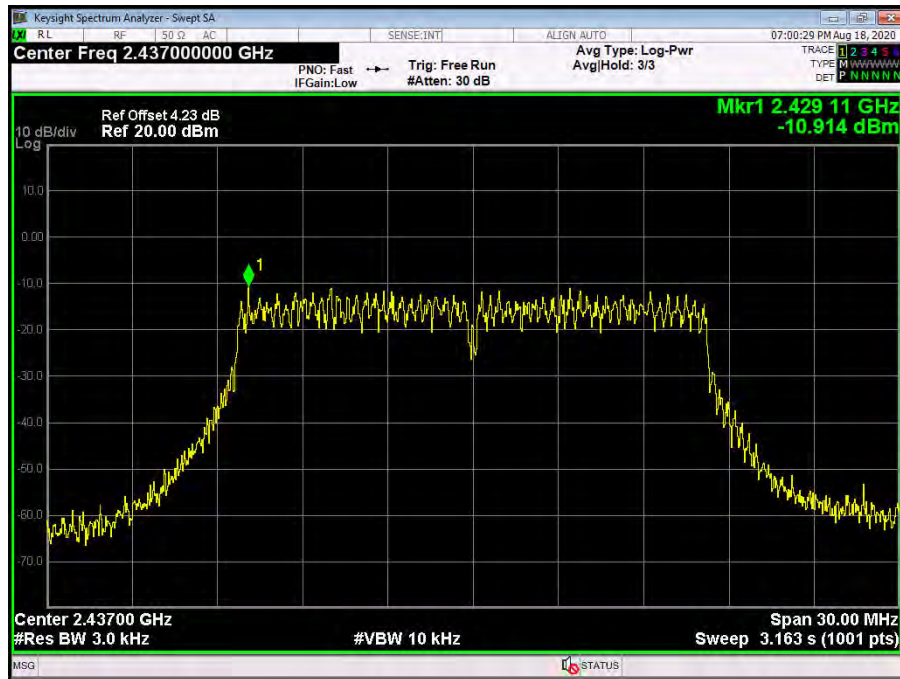

802.11G Mode


2462 MHz

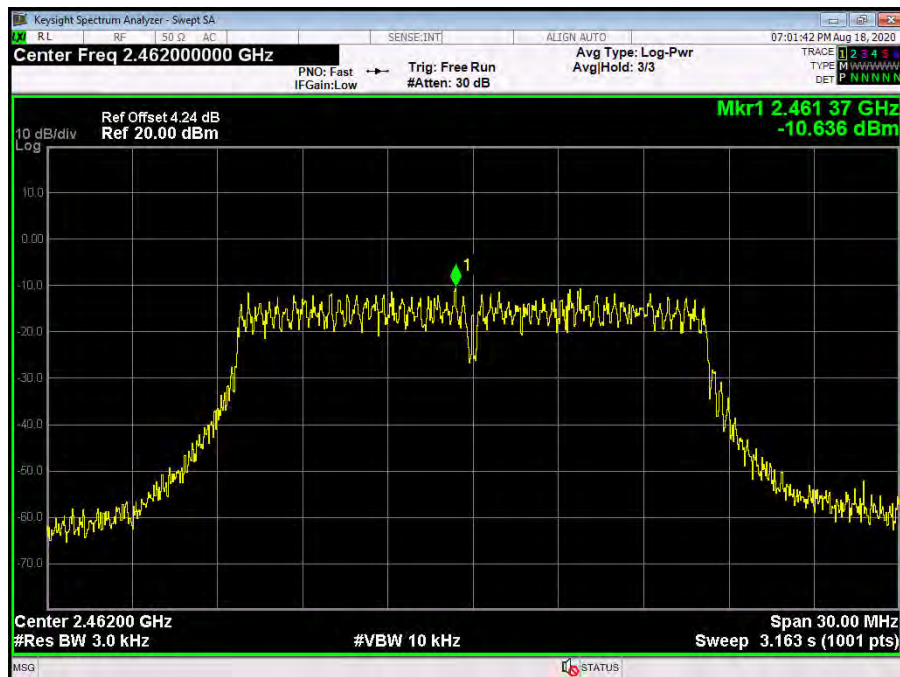

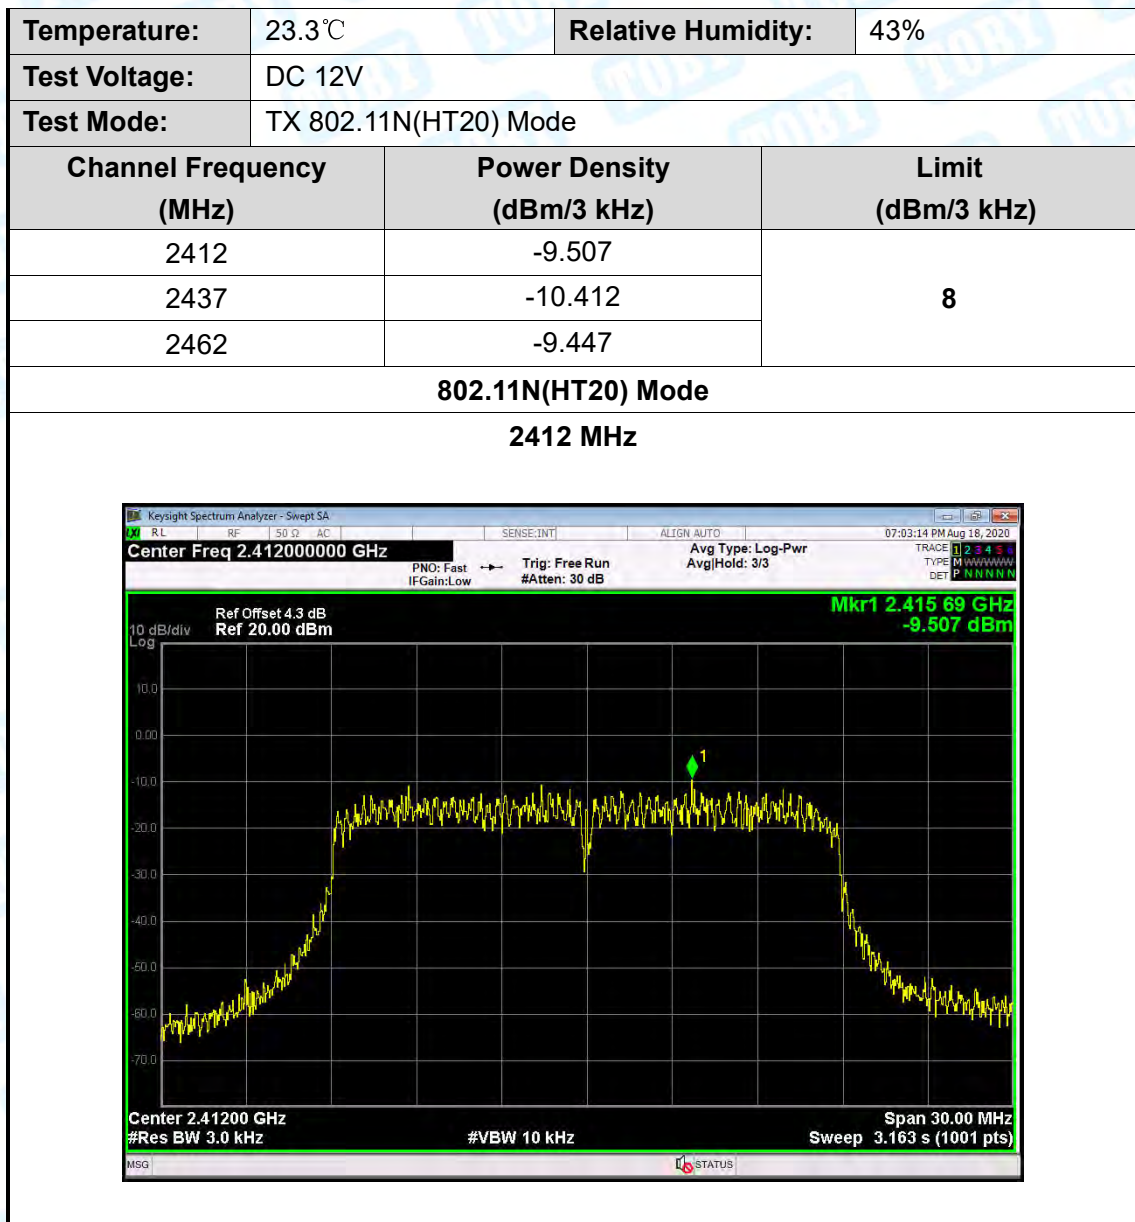


802.11N(HT20) Mode

2437 MHz

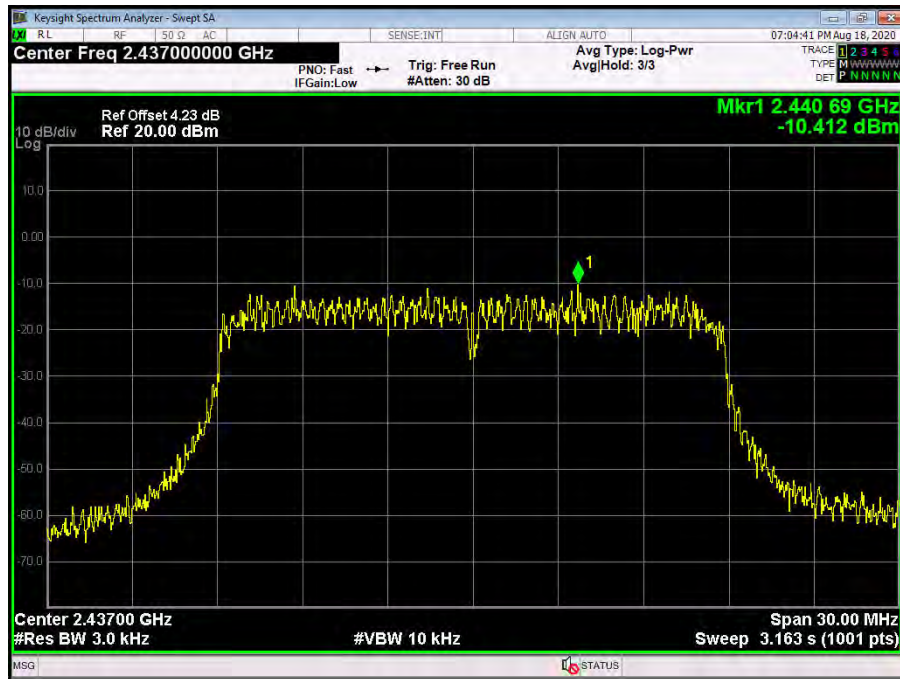

802.11N(HT20) Mode

2462 MHz

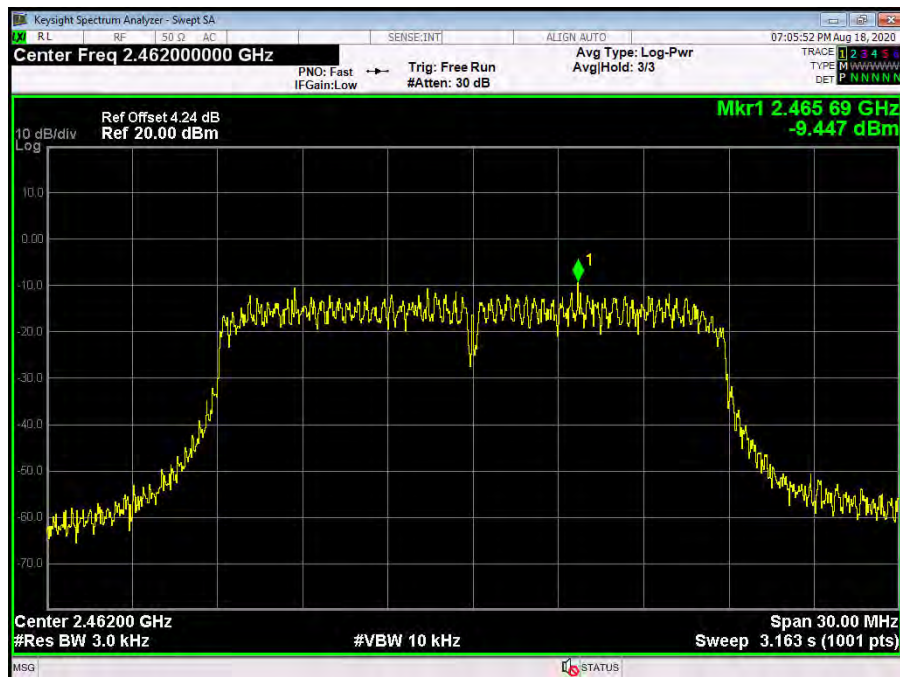

-----END OF REPORT-----