

FCC Test Report

Report No.: AGC10648210401FE05B

FCC ID	:	2AXBN-CG7
APPLICATION PURPOSE	:	Class II permissove change
PRODUCT DESIGNATION	:	Wireless Smart Battery Camera
BRAND NAME	:	N/A
MODEL NAME	:	HGWBC-356, CQ1, Q1, Q2, Q3, CG1, CG2, CG5, CG6, CG7, DX1, DX2, DX3, DX4, DX5, DX6, DX8, DX10, DG1, DG4, DG5, DG6, DG8, Q4, Q5, Q6, Q8, DX7, HGWBC-351, HGWBC-358
APPLICANT	:	SHENZHEN CYTON Intelligence Technology CO., LTD
DATE OF ISSUE	:	Sep. 14, 2022
STANDARD(S) TEST PROCEDURE(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0
		Sola Compliance She

Attestation of Global Compliance (Shenzhen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 14, 2022	Valid	Initial Release

Note:

The original test report Ref. No. AGC10648210401FE05A dated Dec. 28, 2021 was modified on Sep. 14, 2022 to include the following changes:

-Change the EUT photos;

-Change the EMC test photos;

-Change the Sensor lens;

-Change the test model;

-Change the battery;

-Increase the series models;

-The Main control model T31 ZX is changed to T31 ZL;

-Change the Hardware Version number(Changes in Hardware Version number have no effect on RF);

-The Radiated Emission and Line Conduction Emission tests have been updated.



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. IEEE 802.11N MODULATION SCHEME	7
2.4. RELATED SUBMITTAL(S) / GRANT (S)	7
2.5. TEST METHODOLOGY	7
2.6. SPECIAL ACCESSORIES	7
2.7. EQUIPMENT MODIFICATIONS	7
2.8. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF EUT SYSTEM	11
5.2. EQUIPMENT USED IN EUT SYSTEM	11
5.3. SUMMARY OF TEST RESULTS	11
6. TEST FACILITY	12
7. RADIATED EMISSION	13
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SETUP	
7.3. LIMITS AND MEASUREMENT RESULT	15
7.4. TEST RESULT	15
8. LINE CONDUCTED EMISSION TEST	21
8.1. LIMITS OF LINE CONDUCTED EMISSION TEST	21
8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	21
8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	25
APPENDIX B: PHOTOGRAPHS OF EUT	



1. VERIFICATION OF CONFORMITY

SHENZHEN CYTON Intelligence Technology CO., LTD		
F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China		
nufacturer SHENZHEN CYTON Intelligence Technology CO., LTD		
F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China		
SHENZHEN CYTON Intelligence Technology CO., LTD		
F/L 601, Building K, Jingchangda, No. 2000089 Shangwei industrial zone, Zhangkengjing community, Guanhu street, Longhua District, Shenzhen, China		
Wireless Smart Battery Camera		
N/A		
HGWBC-356		
CQ1, Q1, Q2, Q3, CG1, CG2, CG5, CG6, CG7, DX1, DX2, DX3, DX4, DX5, DX6, DX8, DX10, DG1, DG4, DG5, DG6, DG8, Q4, Q5, Q6, Q8, DX7, HGWBC-351, HGWBC-358		
All the series models are the same as the test model except for the model names and the color of appearance		
Jul. 22, 2022 to Aug. 20, 2022		
No any deviation from the test method		
Normal		
Pass		
AGCRT-US-BGN/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Jod chen Prepared By Cool Cheng Sep. 14, 2022 (Project Engineer) Reviewed By Calvin Liu Sep. 14, 2022 (Reviewer) Approved By Max Zhang Sep. 14, 2022 (Authorized Officer)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless Smart Battery Camera". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Equipment Type	WLAN 2.4G		
Frequency Band	2400MHz ~ 2483.5MHz		
Operation Frequency	2412MHz ~ 2462MHz		
Output Power (Average)	IEEE 802.11b:15.66dBm; IEEE 802.11g:14.14dBm;		
Output Power (Average)	IEEE 802.11n(HT20):13.48dBm		
Output Power (Peak)	IEEE 802.11b:22.07dBm; IEEE 802.11g:22.71dBm;		
	IEEE 802.11n(HT20):21.94dBm		
Modulation	802.11b:DQPSK, DBPSK, CCK		
	802.11g/n: 64-QAM, 16-QAM, QPSK, BPSK		
	802.11b: 1/2/5.5/11Mbps		
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps		
	802.11n: up to 300Mbps		
Number of channels	11		
Hardware Version	CG721C_C01_V1		
Software Version	2.0.2.20210517		
Antenna DesignationFPC antenna (Comply with requirements of the FCC part 15.203)			
Antenna Gain	2.62dBi		
Power Supply	DC 3.7V by battery or DC 5V by adapter		



2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency		
	1	2412 MHZ		
	2	2417 MHZ		
	3	2422 MHZ		
	4	2427 MHZ		
	5	2432 MHZ		
2400~2483.5MHZ	6	2437 MHZ		
	7	2442 MHZ		
	8	2447 MHZ		
	9	2452 MHZ		
	10	2457 MHZ		
	11	2462 MHZ		

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11.



2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC			NDBPS			ata //bps) nsGl
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R Code rate	
NBPSC	Number of coded bits per single carrier
NCBPS Number of coded bits per symbol	
NDBPS Number of data bits per sym	
GI	Guard interval

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AXBN-CG7** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmissio n system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd



2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$	
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.8 \text{ dB}$	
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$	
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of spurious emissions, conducted	U _c = ±2 %	
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$	



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION					
1	Low channel transmitting (TX)					
2	Middle channel transmitting (TX)					
3	High channel transmitting (TX)					
	Transmit by 802.11b with Date rate (1/2/5.5/11)					
Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)						
Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)						
The tes	t channel for 20MHZ bandwidth system is channel 1, 6 and 11.					

Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. The test software is the SecureCRT which can set the EUT into the individual test modes.




5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission

EUT

Conducted Emission



5.2. EQUIPMENT USED IN EUT SYSTEM

ltem	Equipment Model No.		ID or Specification	Remark
1	Wireless Smart Battery Camera	CG7	2AXBN-CG7	EUT
2	Adapter	XCMS03-0510	N/A	AE
3	Charger line	N/A	0.6m unshielded	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.209	Radiated Emission	Compliant
§15.207	Line Conduction Emission	Compliant



6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
Artificial power network	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test Software	FARA	EZ-EMC(Ver. AGC-CON03A1)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 06, 2021	Sep. 05, 2022
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-4 94	Jan. 08, 2021	Jan. 07, 2023
Test Software	FARA	EZ-EMC(Ver.RA- 03A)	N/A	N/A	N/A



7. RADIATED EMISSION


7.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




7.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

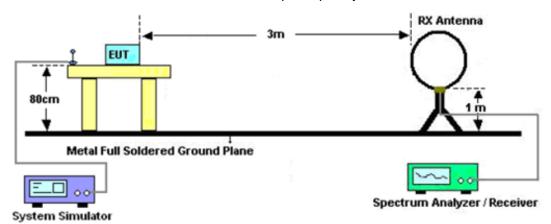

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

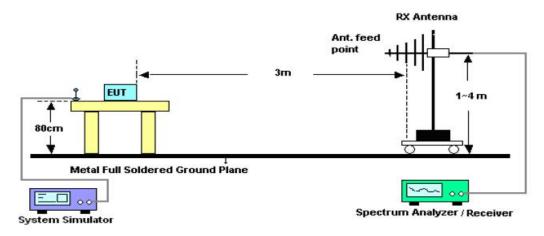

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

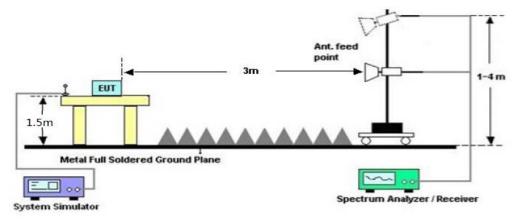



7.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

7.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



EUT	Wireless Smart Battery Camera	Model Name	HGWBC-356
Temperature	20°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Radiated emission from 30MHz to 1000MHz

2.0	dBuV/m	
		_

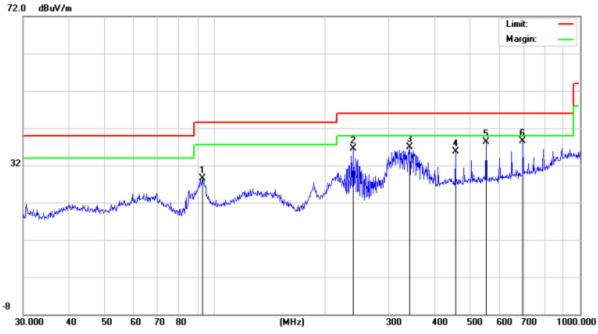


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		92.7871	11.54	16.89	28.43	43.50	-15.07	peak
2		239.9874	17.76	18.66	36.42	46.00	-9.58	peak
3		341.9786	14.46	22.54	37.00	46.00	-9.00	peak
4		455.9058	12.87	22.86	35.73	46.00	-10.27	peak
5		552.8832	14.76	23.51	38.27	46.00	-7.73	peak
6	*	696.8567	13.48	25.11	38.59	46.00	-7.41	peak

RESULT: PASS



EUT	Wireless Smart Battery Camera	Model Name	HGWBC-356
Temperature	20°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

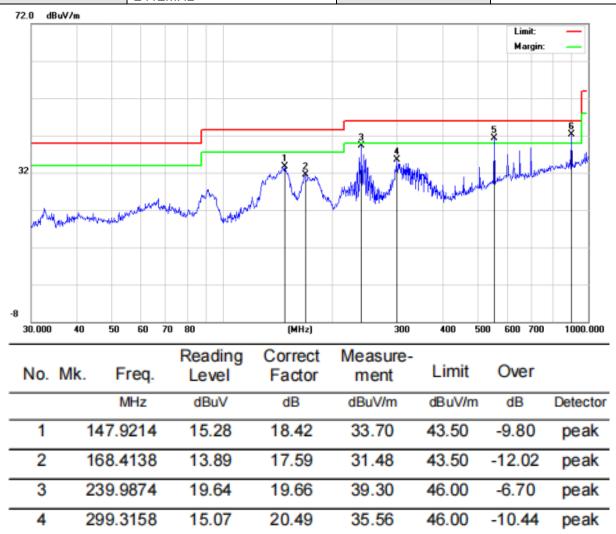

RESULT: PASS

5

I

6 *

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

16.83

13.62

2. The "Factor" value can be calculated automatically by software of measurement system.

24.56

28.64

3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the

41.39

42.26

-4.61

-3.74

peak

peak

46.00

46.00

report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

552.8832

900.1474



EUT	Wireless Smart Battery Camera	Model Name	HGWBC-356
Temperature	20°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	54.67	0.08	54.75	74	-19.25	peak
4824.000	44.21	0.08	44.29	54	-9.71	AVG
7236.000	50.37	2.21	52.58	74	-21.42	peak
7236.000	39.76	2.21	41.97	54	-12.03	AVG
emark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-356
Temperature	20°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	55.97	0.08	56.05	74	-17.95	peak
4824.000	45.24	0.08	45.32	54	-8.68	AVG
7236.000	50.46	2.21	52.67	74	-21.33	peak
7236.000	40.74	2.21	42.95	54	-11.05	AVG
Remark:	1		1			1
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			



EUT	Wireless Smart Battery Camera	Model Name	HGWBC-356
Temperature	20°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	56.57	0.14	56.71	74	-17.29	peak
4874.000	44.02	0.14	44.16	54	-9.84	AVG
7311.000	52.76	2.36	55.12	74	-18.88	peak
7311.000	38.76	2.36	41.12	54	-12.88	AVG
Remark:						•
actor = Anter	na Factor + Cab	le Loss – Pre-a	mplifier.			

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-356
Temperature	20°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4874.000	55.85	0.14	55.99	74	-18.01	peak
4874.000	45.12	0.14	45.26	54	-8.74	AVG
7311.000	51.65	2.36	54.01	74	-19.99	peak
7311.000	42.37	2.36	44.73	54	-9.27	AVG
lemark:						

<u>|Factor = Antenna Factor + Cable Loss – Pre-amplifier.</u>



EUT	Wireless Smart Battery Camera	Model Name	HGWBC-356
Temperature	20°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	55.21	0.22	55.43	74	-18.57	peak
4924.000	43.67	0.22	43.89	54	-10.11	AVG
7386.000	48.74	2.64	51.38	74	-22.62	peak
7386.000	38.42	2.64	41.06	54	-12.94	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.			

EUT	Wireless Smart Battery Camera	Model Name	HGWBC-356
Temperature	20°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	54.23	0.22	54.45	74	-19.55	peak
4924.000	44.12	0.22	44.34	54	-9.66	AVG
7386.000	49.57	2.64	52.21	74	-21.79	peak
7386.000	41.73	2.64	44.37	54	-9.63	AVG
Remark:						
Cactor - Antor	na Factor + Cabl	aloce Dra	amplifior			

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



8. LINE CONDUCTED EMISSION TEST


8.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage				
Frequency	Q.P (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

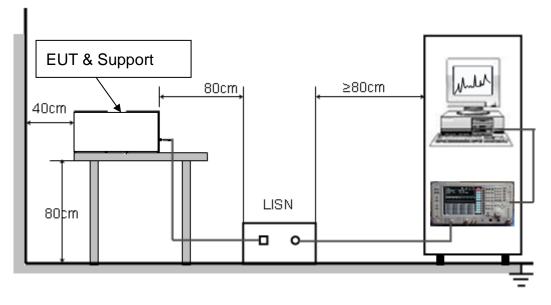



8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

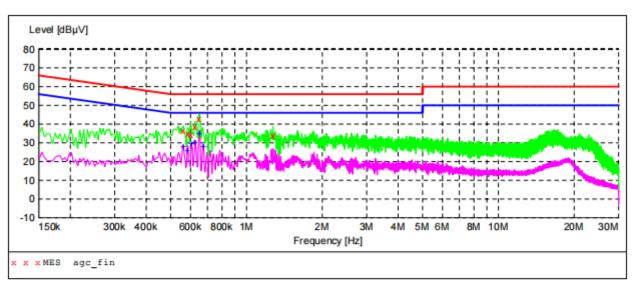

Line Conducted Emission Test Line 1-L

MEASUREMENT RESULT: "agc_fin"

2022/8/13 16							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
MHz	dBµV	dB	dBµV	dB			
0.562000	36.70	5.4	56	19.3	QP	L1	GND
0.586000	35.00	5.4	56	21.0	QP	L1	GND
0.602000	34.50	5.4	56	21.5	QP	L1	GND
0.626000	38.50	5.4	56	17.5	QP	L1	GND
0.650000	42.90	5.4	56	13.1	QP	L1	GND
1.274000	34.00	5.8	56	22.0	QP	L1	GND

MEASUREMENT RESULT: "agc fin2"

2022/8/13 1	6:33						
Frequency	/ Level	Transd	Limit	Margin	Detector	Line	PE
MH2	dBµV	dB	dBµV	dB			
0.562000	27.80	5.4	46	18.2	AV	L1	GND
0.582000	25.80	5.4	46	20.2	AV	L1	GND
0.606000	29.70	5.4	46	16.3	AV	L1	GND
0.626000	29.90	5.4	46	16.1	AV	L1	GND
0.650000	35.10	5.4	46	10.9	AV	L1	GND
0.674000	28.10	5.4	46	17.9	AV	L1	GND


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Line Conducted Emission Test Line 2-N

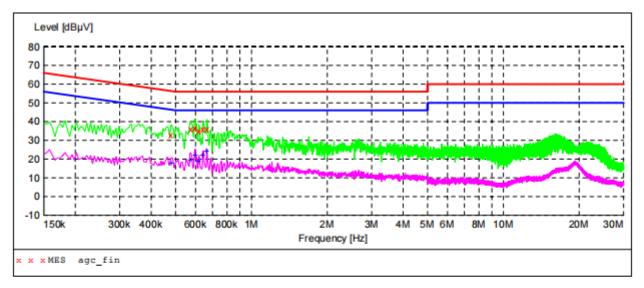

MEASUREMENT RESULT: "agc fin"

2022/8/13 16: Frequency MHz	30 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.482000 0.574000 0.598000 0.618000 0.646000 0.666000	32.90 35.80 36.60 34.90 35.90 35.90	5.4 5.4 5.4 5.4 5.4 5.4 5.4	56 56 56 56 56	23.4 20.2 19.4 21.1 20.1 20.1	QP QP QP QP QP QP	N N N N N	GND GND GND GND GND GND

MEASUREMENT RESULT: "agc fin2"

2022/8/13 16:30											
Frequen	cy Leve	l Transd	Limit	Margin	Detector	Line	PE				
M	Hz dBµ	V dB	dBµV	dB							
0.4820	17.7	0 5.4	46	28.6	AV	N	GND				
0.5740	19.3	0 5.4	46	26.7	AV	N	GND				
0.5980	22.1	0 5.4	46	23.9	AV	N	GND				
0.6180	19.0	0 5.4	46	27.0	AV	N	GND				
0.6420	22.0	0 5.4	46	24.0	AV	N	GND				
0.6660	24.4	0 5.4	46	21.6	AV	N	GND				

RESULT: PASS

Note: All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC10648210401AP02B

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC10648210401AP03B

----END OF REPORT----



Conditions of Issuance of Test Reports

 All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
 Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.