



# FCC TEST REPORT

## FCC ID:2AXCX-NT630

**Report Number..... : ZKT-2501060425E-2**

**Date of Test..... Feb. 05, 2025 to Feb. 11, 2025**

**Date of issue..... : Feb. 11, 2025**

**Total number of pages..... 93**

**Test Result ..... : PASS**

**Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.**

**Address ..... : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China**

**Applicant's name ..... : Shenzhen Foxwell Technology Co., Ltd**

**Address ..... : 5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District, Shenzhen 518106, China**

**Manufacturer's name ..... : Shenzhen Foxwell Technology Co., Ltd**

**Address ..... : 5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District, Shenzhen 518106, China**

**Test specification:**

**Standard..... : FCC CFR Title 47 Part 15 Subpart E Section 15.407  
ANSI C63.10:2013  
KDB 789033 D02 v02r01**

**Test procedure..... : /**

**Non-standard test method ..... : N/A**

**Test Report Form No..... : TRF-EL-113\_V0**

**Test Report Form(s) Originator..... : ZKT Testing**

**Master TRF ..... : Dated: 2020-01-06**

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

**Product name..... : ABS & Airbag Reset Tool with SAS Calibration**

**Trademark ..... : N/A**

**Model/Type reference..... : NT630plus  
NT630Plus wireless, AD610Plus wireless, NT530PLUS, NT530**

**Ratings..... : Input: 8-18V DC**



Testing procedure and testing location:

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community  
Industrial Avenue, Fuhai Street, Bao'an District,  
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Jackson Fang

Approved (name + signature).....: Lake Xie





| Table of Contents                                                 | Page |
|-------------------------------------------------------------------|------|
| 1. VERSION .....                                                  | 5    |
| 2.SUMMARY OF TEST RESULTS .....                                   | 6    |
| 2.1 TEST FACILITY .....                                           | 7    |
| 2.2 MEASUREMENT UNCERTAINTY .....                                 | 7    |
| 3. GENERAL INFORMATION .....                                      | 8    |
| 3.1 GENERAL DESCRIPTION OF EUT .....                              | 8    |
| 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED ..... | 11   |
| 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) .....            | 11   |
| 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS .....                      | 12   |
| 4.EMC EMISSION TEST .....                                         | 14   |
| 4.1 CONDUCTED EMISSION MEASUREMENT .....                          | 14   |
| 4.1.1 POWER LINE CONDUCTED EMISSION Limits .....                  | 14   |
| 4.1.2 TEST PROCEDURE .....                                        | 14   |
| 4.1.3 DEVIATION FROM TEST STANDARD .....                          | 14   |
| 4.1.4 TEST SETUP .....                                            | 15   |
| 4.1.5 EUT OPERATING CONDITIONS .....                              | 15   |
| 4.1.6 TEST RESULT .....                                           | 16   |
| 4.2 RADIATED EMISSION MEASUREMENT .....                           | 20   |
| 4.2.1 APPLICABLE STANDARD .....                                   | 20   |
| 4.2.2 CONFORMANCE LIMIT .....                                     | 20   |
| 4.2.3 MEASURING INSTRUMENTS .....                                 | 20   |
| 4.2.4 TEST CONFIGURATION .....                                    | 21   |
| 4.2.5 TEST PROCEDURE .....                                        | 22   |
| 4.2.6 TEST RESULT .....                                           | 23   |
| 5.POWER SPECTRAL DENSITY TEST .....                               | 39   |
| 5.1 APPLIED PROCEDURES / LIMIT .....                              | 39   |
| 5.2 TEST PROCEDURE .....                                          | 40   |
| 5.3 DEVIATION FROM STANDARD .....                                 | 40   |
| 5.4 TEST SETUP .....                                              | 40   |
| 5.5 EUT OPERATION CONDITIONS .....                                | 40   |
| 5.6 TEST RESULTS .....                                            | 41   |
| 6. 26DB EMISSION BANDWIDTH & 6DB OCCUPIED BANDWIDTH .....         | 49   |
| 6.1 APPLIED PROCEDURES / LIMIT .....                              | 49   |
| 6.2 TEST PROCEDURE .....                                          | 49   |
| 6.3 EUT OPERATION CONDITIONS .....                                | 49   |
| 6.4 TEST RESULTS .....                                            | 50   |



| Table of Contents                         | Page      |
|-------------------------------------------|-----------|
| <b>7.MAXIMUM CONDUCTED OUTPUT POWER</b>   | <b>60</b> |
| 7.1 PPLIED PROCEDURES / LIMIT             | 60        |
| 7.2 TEST PROCEDURE                        | 60        |
| 7.3 DEVIATION FROM STANDARD               | 61        |
| 7.4 TEST SETUP                            | 61        |
| 7.5 EUT OPERATION CONDITIONS              | 61        |
| 7.6 TEST RESULTS                          | 62        |
| <b>8.OUT OF BAND EMISSIONS</b>            | <b>64</b> |
| 8.1 APPLICABLE STANDARD                   | 64        |
| 8.2 TEST PROCEDURE                        | 64        |
| 8.3 DEVIATION FROM STANDARD               | 64        |
| 8.4 TEST SETUP                            | 64        |
| 8.5 EUT OPERATION CONDITIONS              | 64        |
| 8.6 TEST RESULTS                          | 65        |
| <b>9.SPURIOUS RF CONDUCTED EMISSIONS</b>  | <b>68</b> |
| 9.1 CONFORMANCE LIMIT                     | 71        |
| 9.2 MEASURING INSTRUMENTS                 | 71        |
| 9.3 TEST SETUP                            | 71        |
| 9.4 TEST PROCEDURE                        | 71        |
| 9.5 TEST RESULTS                          | 71        |
| <b>10.FREQUENCY STABILITY MEASUREMENT</b> | <b>77</b> |
| 10.1 LIMIT                                | 77        |
| 10.2 TEST PROCEDURES                      | 77        |
| 10.3 TEST SETU P LAYOUT                   | 77        |
| 10.4 EUT OPERATION DURING TEST            | 77        |
| 10.5 TEST RESULTS                         | 78        |
| <b>11. DUTY CYCLE</b>                     | <b>84</b> |
| 11.1 APPLIED PROCEDURES / LIMIT           | 84        |
| 11.2 DEVIATION FROM STANDARD              | 84        |
| 11.3 TEST SETUP                           | 84        |
| <b>12.ANTENNA REQUIREMENT</b>             | <b>89</b> |
| <b>13. TEST SETUP PHOTO</b>               | <b>93</b> |
| <b>14. EUT CONSTRUCTIONAL DETAILS</b>     | <b>93</b> |



1. VERSION

| Report No.        | Version | Description             | Approved      |
|-------------------|---------|-------------------------|---------------|
| ZKT-2501060425E-2 | Rev.01  | Initial issue of report | Feb. 11, 2025 |
|                   |         |                         |               |



## 2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.407) , Subpart E                              |                                                     |          |        |
|--------------------------------------------------------------|-----------------------------------------------------|----------|--------|
| Standard Section                                             | Test Item                                           | Judgment | Remark |
| 15.207                                                       | AC Power Line Conducted Emission                    | PASS     |        |
| 789033 D02 General U-NII                                     | Duty Cycle                                          | PASS     |        |
| 15.209(a)<br>15.407 (b)(1)<br>15.407 (b)(4)<br>15.407 (b)(8) | Spurious Radiated Emissions                         | PASS     |        |
| 15.407 (a)(12)<br>15.407(e)                                  | 26dB Emission Bandwidth &<br>6dB Occupied Bandwidth | PASS     |        |
| 15.407 (a)(1)<br>15.407 (a)(3)                               | Maximum Conducted Output Power                      | PASS     |        |
| 2.1051,<br>15.407(b)(1)<br>15.407(b)(4)                      | Band Edge                                           | PASS     |        |
| 15.407 (a)(1)<br>15.407 (a)(3)                               | Power Spectral Density                              | PASS     |        |
| 2.1051,<br>15.407(b)                                         | Spurious Emissions at Antenna Terminals             | PASS     |        |
| 15.203                                                       | Antenna Requirement                                 | PASS     |        |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



## 2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                                              | Uncertainty |
|-----|---------------------------------------------------|-------------|
| 1   | 3m chamber Radiated spurious emission(9KHz-30MHz) | U=4.5dB     |
| 2   | 3m chamber Radiated spurious emission(30MHz-1GHz) | U=4.8dB     |
| 3   | 3m chamber Radiated spurious emission(1GHz-6GHz)  | U=4.9dB     |
| 4   | 3m chamber Radiated spurious emission(6GHz-40GHz) | U=5.0dB     |
| 5   | Conducted disturbance                             | U=3.2dB     |
| 6   | RF Band Edge                                      | U=1.68dB    |
| 7   | RF power conducted                                | U=1.86dB    |
| 8   | RF conducted Spurious Emission                    | U=2.2dB     |
| 9   | RF Occupied Bandwidth                             | U=1.8MHz    |
| 10  | RF Power Spectral Density                         | U=1.75dB    |
| 11  | humidity uncertainty                              | U=5.3%      |
| 12  | Temperature uncertainty                           | U=0.59°C    |





### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                      |                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
|----------------------|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Product Name:        | ABS & Airbag Reset Tool with SAS Calibration                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
| Model No.:           | NT630plus                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
| Serial Model:        | NT630Plus wrieless, AD610Plus wrieless, NT530PLUS, NT530                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
| Model Different.:    | All the model are the same circuit and RF module,Only the model name different. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
| Sample ID            | E-1                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
| Sample(s) Status:    | Engineer sample                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
| Product Description: | IEEE 802.11 WLAN Mode Supported                                                 | <input checked="" type="checkbox"/> 802.11a/n/ac                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |         |
|                      | Data Rate                                                                       | 802.11a: 6/9/12/24/18/36/48/54Mbit/s<br>802.11n: MCS0-MCS7<br>802.11ac: MCS0-MCS9                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |         |
|                      | Modulation                                                                      | 802.11a/n/ac:<br>Orthogonal Frequency Division Multiplexing(OFDM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |         |
|                      | Operating Frequency Range                                                       | <input checked="" type="checkbox"/> 5180-5240MHz for 802.11a/n/ac (20M);<br><input checked="" type="checkbox"/> 5190-5230MHz for 802.11n/ac (40M);<br><input checked="" type="checkbox"/> 5210MHz for 802.11 ac (80M);<br><input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n/ac (20M);<br><input checked="" type="checkbox"/> 5755-5795 MHz for 802.11n/ac (40M);<br><input checked="" type="checkbox"/> 5775MHz for 802.11 ac (80M).                                                                                                                                               |         |
|                      | Number of Channels                                                              | <input checked="" type="checkbox"/> 4 channels for 802.11 a/n/ac (20M) in the 5180-5240MHz band;<br><input checked="" type="checkbox"/> 2 channels for 802.11 n/ac (40M) in the 5190-5230 MHz band;<br><input checked="" type="checkbox"/> 1 channels for 802.11 ac (80M) in the 5210MHz band;<br><input checked="" type="checkbox"/> 5 channels for 802.11 a/n/ac (20M) in the 5745-5825MHz band;<br><input checked="" type="checkbox"/> 2 channels for 802.11 n/ac (40M) in the 5755-5795 MHz band;<br><input checked="" type="checkbox"/> 1 channels for 802.11 ac (80M) in the 5775MHz band. |         |
| Channel List         | Please refer to the Note 2.                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
| Antenna Type:        | PCB Antenna                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |
| Antenna gain:        | Band                                                                            | 5.2G                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 5.8G    |
|                      | Gain                                                                            | 1.81dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 4.45dBi |
| Power supply:        | Input: 8-18V DC                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |



**Note:**

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

| 802.11a/n/ac(20MHz) Frequency Channel For 5.2G |                 |         |                 |         |                 |         |                 |
|------------------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                                        | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 36                                             | 5180            | 40      | 5200            | 44      | 5220            | 48      | 5240            |

| 802.11n/ac(40MHz) Frequency Channel For 5.2G |                 |         |                 |         |                 |         |                 |
|----------------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                                      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 38                                           | 5190            | 46      | 5230            | -       | -               | -       | -               |

| 802.11ac(80MHz) Frequency Channel For 5.2G |                 |         |                 |         |                 |         |                 |
|--------------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                                    | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 42                                         | 5210            |         |                 | -       | -               | -       | -               |

| 802.11a/n/ac(20MHz) Frequency Channel For 5.8G |                 |         |                 |         |                 |         |                 |
|------------------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                                        | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 149                                            | 5745            | 153     | 5765            | 157     | 5785            | 161     | 5805            |
| 165                                            | 5825            | -       | -               | -       | -               | -       | -               |

| 802.11n/ac(40MHz) Frequency Channel For 5.8G |                 |         |                 |         |                 |         |                 |
|----------------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                                      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 151                                          | 5755            | 159     | 5795            | -       | -               | -       | -               |

| 802.11ac(80MHz) Frequency Channel For 5.8G |                 |         |                 |         |                 |         |                 |
|--------------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                                    | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 155                                        | 5775            |         |                 | -       | -               | -       | -               |



### 3.2 DESCRIPTION OF TEST MODES

| Pretest Mode | Description                                                                          |
|--------------|--------------------------------------------------------------------------------------|
| Mode 1       | 802.11 a/n/ac (20M)<br>CH 36/CH 40/CH 48 For 5.2G      CH 149/CH 157/CH 165 For 5.8G |
| Mode 2       | 802.11 n/ac (40M)<br>CH 38/CH 46 For 5.2G      CH 151/CH 159 For 5.8G                |
| Mode 3       | 802.11 ac (80M)<br>CH 42 For 5.2G      CH 155 For 5.8G                               |

| Final Test Mode | For Conducted Emission                                                               |
|-----------------|--------------------------------------------------------------------------------------|
|                 | Description                                                                          |
| Mode 1          | 802.11 a/n/ac (20M)<br>CH 36/CH 40/CH 48 For 5.2G      CH 149/CH 157/CH 165 For 5.8G |
| Mode 2          | 802.11 n/ac (40M)<br>CH 38/CH 46 For 5.2G      CH 151/CH 159 For 5.8G                |
| Mode 3          | 802.11 ac (80M)<br>CH 42 For 5.2G      CH 155 For 5.8G                               |

| Final Test Mode | For Radiated Emission                                                                |
|-----------------|--------------------------------------------------------------------------------------|
|                 | Description                                                                          |
| Mode 1          | 802.11 a/n/ac (20M)<br>CH 36/CH 40/CH 48 For 5.2G      CH 149/CH 157/CH 165 For 5.8G |
| Mode 2          | 802.11 n/ac (40M)<br>CH 38/CH 46 For 5.2G      CH 151/CH 159 For 5.8G                |
| Mode 3          | 802.11 ac (80M)<br>CH 42 For 5.2G      CH 155 For 5.8G                               |

|                                                                                                                                                                                                                                       |                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                     | Keep the EUT in continuously transmitting mode |
| Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. |                                                |

|                                                                                                                                                                                                              |         |               |                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------|----------------------|
| We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows: |         |               |                      |
| Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.                                                                                                         |         |               |                      |
| Mode                                                                                                                                                                                                         | 802.11a | 802.11n20/n40 | 802.11ac20/ac40/ac80 |
| Data rate                                                                                                                                                                                                    | 6Mbps   | MCS0(HT0)     | MCS0(VHT0)           |

|                   |         |
|-------------------|---------|
| Test Software     | CMD     |
| Power level setup | Default |




### 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


#### Conducted Emission



#### Radiated Emission



#### Conducted Spurious



### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                                       | Mfr/Brand | Model/Type No. | Series No. | Note      |
|------|-------------------------------------------------|-----------|----------------|------------|-----------|
| E-1  | ABS & Airbag Reset Tool<br>with SAS Calibration | N/A       | NT630plus      | N/A        | EUT       |
| E-2  | AC/DC Adapter                                   | HUAWEI    | HW-050450C00   | N/A        | Auxiliary |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |
|      |               |              |        |      |

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) EUT is tested with new battery.



### 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Conduction Emissions Test

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No.        | Firmware Version | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|-------------------|------------------|------------------|------------------|
| 1    | LISN              | R&S          | ENV216   | 101471            | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 2    | LISN              | CYBERTEK     | EM5040A  | E1850400149       | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | Test Cable        | N/A          | C-01     | N/A               | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 4    | EMI Test Receiver | R&S          | ESCI3    | 101393            | 4.42 SP3         | Sep. 29, 2024    | Sep. 28, 2025    |
| 5    | EMC Software      | Frad         | EZ-EMC   | Ver.EMC-CON 3A1.1 | N/A              | \                | \                |

#### Radiation Emissions & Radiation Spurious Emissions Test

| Item | Equipment                         | Manufacturer   | Type No.        | Serial No.         | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|----------------|-----------------|--------------------|------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz)  | KEYSIGHT       | N9020A          | MY55370835         | A.17.05          | Sep. 29, 2024    | Sep. 28, 2025    |
| 2    | Spectrum Analyzer (10kHz-39.9GHz) | R&S            | FSV40-N         | 100363             | 1.71 SP2         | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | EMI Test Receiver (9kHz-7GHz)     | R&S            | ESCI7           | 100969             | 4.32             | Sep. 29, 2024    | Sep. 28, 2025    |
| 4    | Bilog Antenna (30MHz-1500MHz)     | Schwarzbeck    | VULB9168        | 00877              | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 5    | Horn Antenna (1GHz-18GHz)         | Agilent        | AH-118          | 071145             | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 6    | Horn Antenna (15GHz-40GHz)        | A.H.System     | SAS-574         | 588                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 7    | Loop Antenna                      | TESEQ          | HLA6121         | 58357              | N/A              | Oct. 11, 2024    | Oct. 10, 2025    |
| 8    | Amplifier (30-1000MHz)            | EM Electronics | EM330 Amplifier | 60747              | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 9    | Amplifier (1GHz-26.5GHz)          | HuiPu          | 8449B           | 3008A00315         | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 10   | Amplifier (500MHz-40GHz)          | QuanJuDa       | DLE-161         | 097                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 11   | Test Cable                        | N/A            | R-01            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 12   | Test Cable                        | N/A            | R-02            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 13   | Test Cable                        | N/A            | R-03            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 14   | D.C. Power Supply                 | LongWei        | TPR-6405D       | GQ7516             | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 15   | EMC Software                      | Frad           | EZ-EMC          | Ver.EMC-CO N 3A1.1 | N/A              | \                | \                |
| 16   | Turntable                         | MF             | MF-7802BS       | N/A                | N/A              | \                | \                |
| 17   | Antenna tower                     | MF             | MF-7802BS       | N/A                | N/A              | \                | \                |



RF Conducted Test

| Item | Equipment                         | Manufacturer                | Type No.    | Serial No.    | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|-----------------------------|-------------|---------------|------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz)  | KEYSIGHT                    | N9020A      | MY55370835    | A.17.05          | Sep. 29, 2024    | Sep. 28, 2025    |
| 2    | Spectrum Analyzer (10kHz-39.9GHz) | R&S                         | FSV40-N     | 100363        | 1.71 SP2         | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | Test Cable                        | N/A                         | RF-01       | N/A           | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 4    | Test Cable                        | N/A                         | RF-02       | N/A           | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 5    | Test Cable                        | N/A                         | RF-03       | N/A           | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 6    | ESG Signal Generator              | Agilent                     | E4421B      | GB40051203    | B.03.84          | Sep. 29, 2024    | Sep. 28, 2025    |
| 7    | Signal Generator                  | Agilent                     | N5182A      | MY47420215    | A.01.87          | Sep. 29, 2024    | Sep. 28, 2025    |
| 8    | Magnetic Field Probe Tester       | Narda                       | ELT-400     | 0-0344/M-1752 | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 9    | Van der Hoofden measuring head    | Schwarzbeck Mess-elektronik | VDHH 9502   | 9502-039      | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 10   | Wideband Radio Communication Test | R&S                         | CMW500      | 106504        | V 3.7.22         | Sep. 30, 2024    | Sep. 29, 2025    |
| 11   | MWRF Power Meter Test system      | MW                          | MW100-RF CB | 10371         | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 12   | Power Meter                       | KEYSIGHT                    | N1912AP     | 926431        | A.05.00          | Sep. 29, 2024    | Sep. 28, 2025    |
| 13   | D.C. Power Supply                 | LongWei                     | TPR-6405D   | GQ7516        | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 14   | RF Software                       | MW                          | MTS8310     | V2.0.0.0      | N/A              | \                | \                |



## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

|                       |                                      |
|-----------------------|--------------------------------------|
| Test Requirement:     | FCC Part15 C Section 15.207          |
| Test Method:          | ANSI C63.10:2013                     |
| Test Frequency Range: | 150KHz to 30MHz                      |
| Receiver setup:       | RBW=9KHz, VBW=30KHz, Sweep time=auto |

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

(1) \*Decreases with the logarithm of the frequency.

#### 4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments
- powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
  - Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.  
I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the
  - cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
  - LISN at least 80 cm from nearest part of EUT chassis.
  - For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation



#### 4.1.4 TEST SETUP

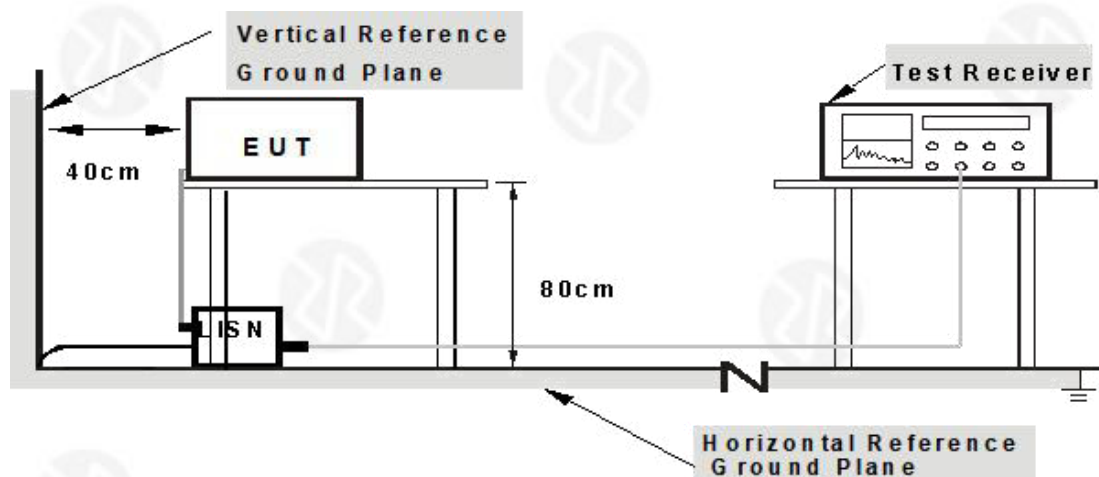

**Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.






#### 4.1.6 TEST RESULT

#### 5.2G:

|               |              |                    |                     |
|---------------|--------------|--------------------|---------------------|
| Temperature:  | 26℃          | Relative Humidity: | 54%                 |
| Pressure:     | 101 kPa      | Polarization:      | L                   |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | 802.11n20 - 5180MHz |

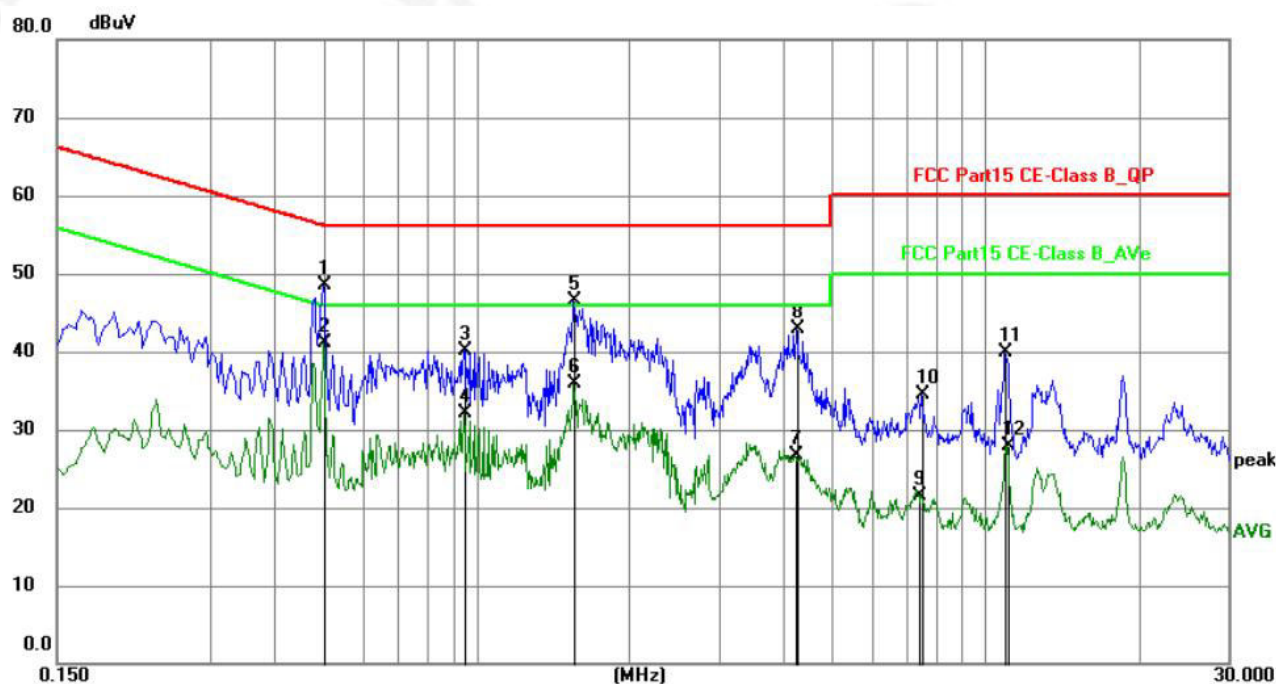


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.5010          | 28.12          | 20.30       | 48.42        | 56.00        | -7.58       | QP       | P   |        |
| 2   | 0.5010          | 20.86          | 20.30       | 41.16        | 46.00        | -4.84       | AVG      | P   |        |
| 3   | 0.9464          | 19.86          | 20.30       | 40.16        | 56.00        | -15.84      | QP       | P   |        |
| 4   | 0.9464          | 11.72          | 20.30       | 32.02        | 46.00        | -13.98      | AVG      | P   |        |
| 5   | 1.5539          | 26.23          | 20.30       | 46.53        | 56.00        | -9.47       | QP       | P   |        |
| 6   | 1.5539          | 15.63          | 20.30       | 35.93        | 46.00        | -10.07      | AVG      | P   |        |
| 7   | 4.2270          | 6.43           | 20.35       | 26.78        | 46.00        | -19.22      | AVG      | P   |        |
| 8   | 4.2675          | 22.55          | 20.35       | 42.90        | 56.00        | -13.10      | QP       | P   |        |
| 9   | 7.4218          | 1.08           | 20.39       | 21.47        | 50.00        | -28.53      | AVG      | P   |        |
| 10  | 7.4939          | 14.03          | 20.39       | 34.42        | 60.00        | -25.58      | QP       | P   |        |
| 11  | 10.9543         | 19.36          | 20.46       | 39.82        | 60.00        | -20.18      | QP       | P   |        |
| 12  | 11.0219         | 7.39           | 20.46       | 27.85        | 50.00        | -22.15      | AVG      | P   |        |

#### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Loss factor + Cable loss factor + limiter factor.
5. Margin = Measurement Level - Limit.
6. The test data shows only the worst case TX 802.11n20 - 5180MHz.



|               |              |                    |                     |
|---------------|--------------|--------------------|---------------------|
| Temperature:  | 26°C         | Relative Humidity: | 54%                 |
| Pressure:     | 101 kPa      | Polarization:      | N                   |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | 802.11n20 - 5180MHz |

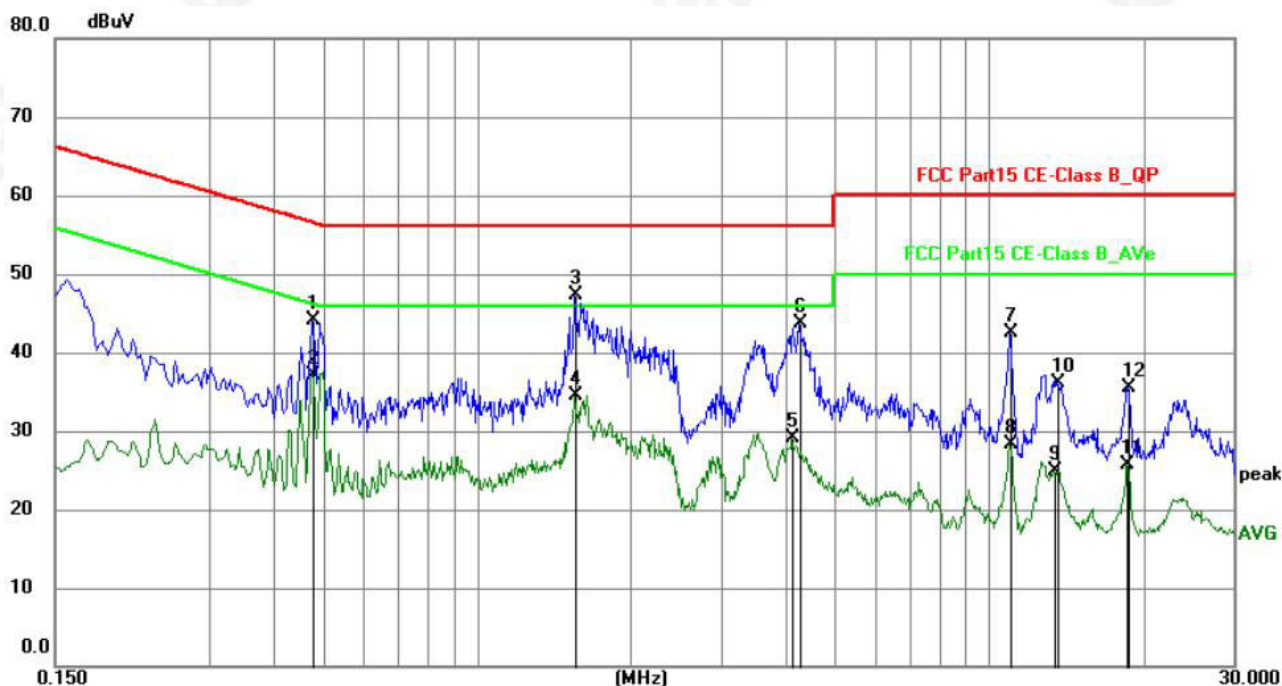

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.4783          | 23.84          | 20.31       | 44.15        | 56.37        | -12.22      | QP       | P   |        |
| 2   | 0.4783          | 16.84          | 20.31       | 37.15        | 46.37        | -9.22       | AVG      | P   |        |
| 3   | 1.5584          | 26.94          | 20.30       | 47.24        | 56.00        | -8.76       | QP       | P   |        |
| 4   | 1.5584          | 14.27          | 20.30       | 34.57        | 46.00        | -11.43      | AVG      | P   |        |
| 5   | 4.1325          | 8.83           | 20.34       | 29.17        | 46.00        | -16.83      | AVG      | P   |        |
| 6   | 4.2583          | 23.31          | 20.34       | 43.65        | 56.00        | -12.35      | QP       | P   |        |
| 7   | 11.0129         | 22.09          | 20.47       | 42.56        | 60.00        | -17.44      | QP       | P   |        |
| 8   | 11.0129         | 7.79           | 20.47       | 28.26        | 50.00        | -21.74      | AVG      | P   |        |
| 9   | 13.4070         | 4.49           | 20.49       | 24.98        | 50.00        | -25.02      | AVG      | P   |        |
| 10  | 13.5510         | 15.58          | 20.49       | 36.07        | 60.00        | -23.93      | QP       | P   |        |
| 11  | 18.6044         | 5.12           | 20.52       | 25.64        | 50.00        | -24.36      | AVG      | P   |        |
| 12  | 18.6223         | 15.08          | 20.52       | 35.60        | 60.00        | -24.40      | QP       | P   |        |


Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lisen factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.The test data shows only the worst case TX 802.11n20 - 5180MHz.



5.8G:

|               |              |                    |                     |
|---------------|--------------|--------------------|---------------------|
| Temperature:  | 26℃          | Relative Humidity: | 54%                 |
| Pressure:     | 101 kPa      | Polarization:      | L                   |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | 802.11n20 - 5745MHz |

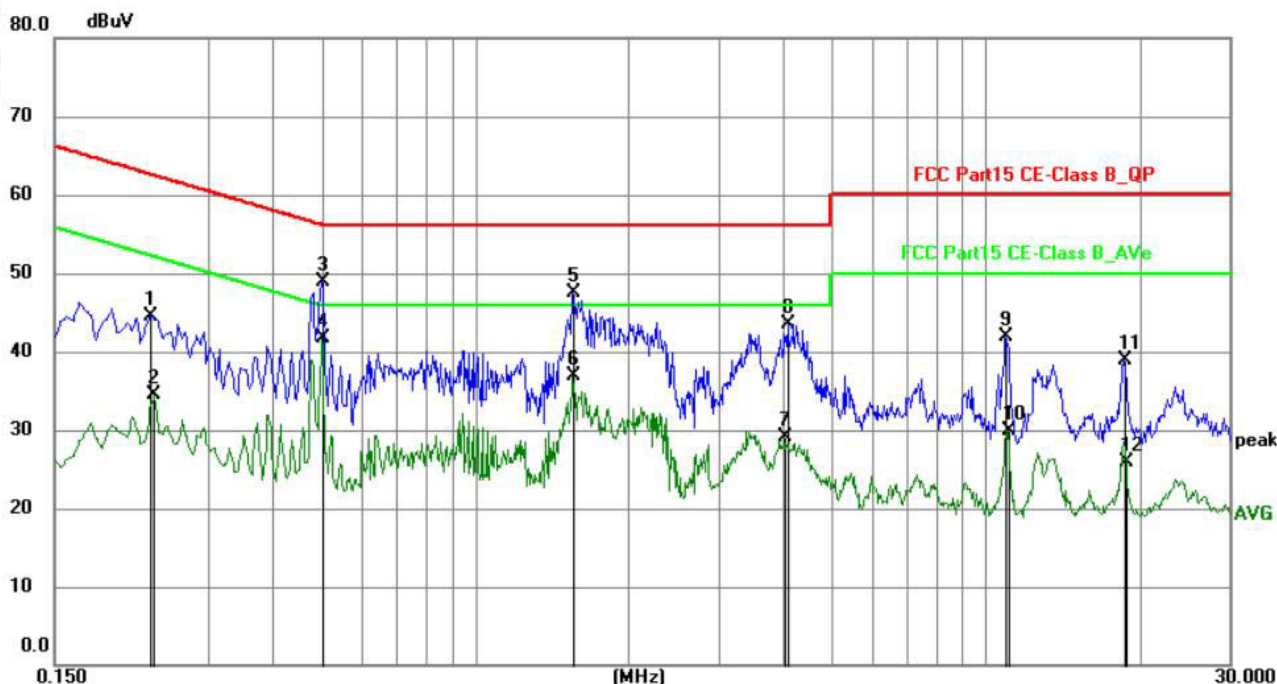

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.2310          | 24.04          | 20.37       | 44.41        | 62.41        | -18.00      | QP       | P   |        |
| 2   | 0.2353          | 14.08          | 20.37       | 34.45        | 52.26        | -17.81      | AVG      | P   |        |
| 3   | 0.5010          | 28.62          | 20.30       | 48.92        | 56.00        | -7.08       | QP       | P   |        |
| 4   | 0.5010          | 21.36          | 20.30       | 41.66        | 46.00        | -4.34       | AVG      | P   |        |
| 5   | 1.5539          | 27.23          | 20.30       | 47.53        | 56.00        | -8.47       | QP       | P   |        |
| 6   | 1.5539          | 16.63          | 20.30       | 36.93        | 46.00        | -9.07       | AVG      | P   |        |
| 7   | 4.0425          | 8.75           | 20.34       | 29.09        | 46.00        | -16.91      | AVG      | P   |        |
| 8   | 4.0918          | 23.24          | 20.35       | 43.59        | 56.00        | -12.41      | QP       | P   |        |
| 9   | 10.9541         | 21.36          | 20.46       | 41.82        | 60.00        | -18.18      | QP       | P   |        |
| 10  | 11.0219         | 9.39           | 20.46       | 29.85        | 50.00        | -20.15      | AVG      | P   |        |
| 11  | 18.6312         | 18.44          | 20.50       | 38.94        | 60.00        | -21.06      | QP       | P   |        |
| 12  | 18.8202         | 5.34           | 20.51       | 25.85        | 50.00        | -24.15      | AVG      | P   |        |


Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Liscn factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.The test data shows only the worst case TX 802.11n20 - 5745MHz.





|               |              |                    |                     |
|---------------|--------------|--------------------|---------------------|
| Temperature:  | 26°C         | Relative Humidity: | 54%                 |
| Pressure:     | 101 kPa      | Polarization:      | N                   |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | 802.11n20 - 5745MHz |

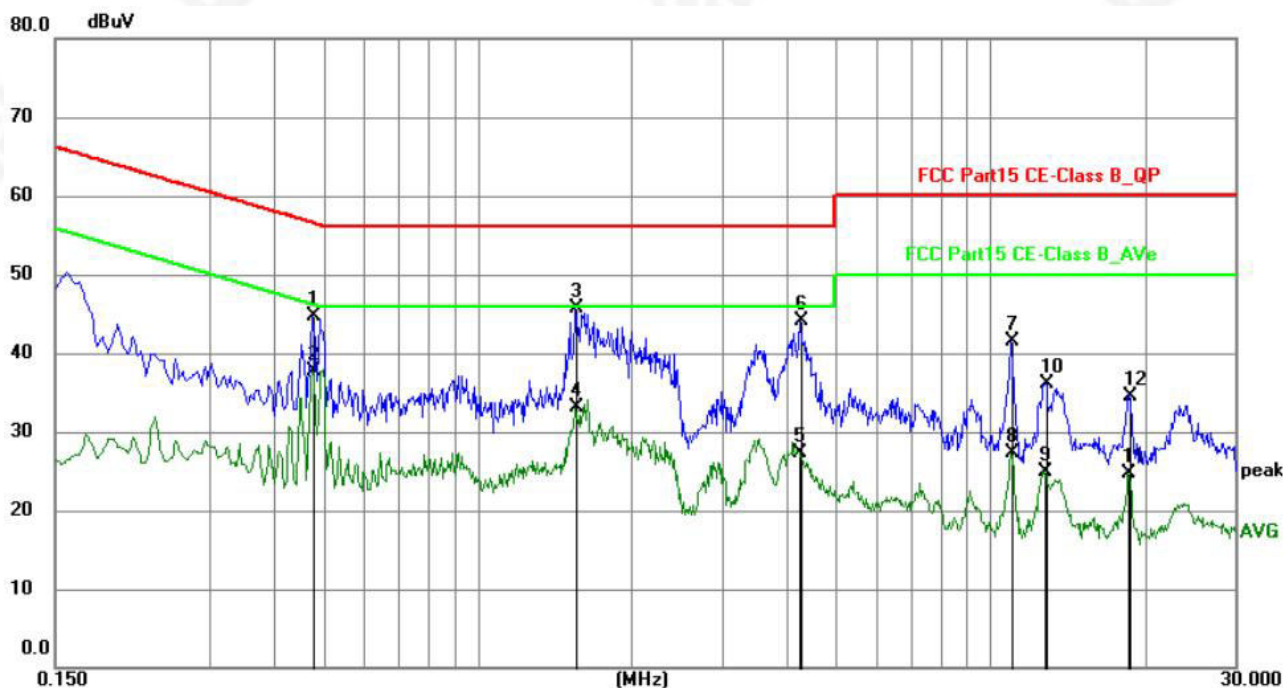

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.4783          | 24.34          | 20.31       | 44.65        | 56.37        | -11.72      | QP       | P   |        |
| 2   | 0.4783          | 17.34          | 20.31       | 37.65        | 46.37        | -8.72       | AVG      | P   |        |
| 3   | 1.5584          | 25.44          | 20.30       | 45.74        | 56.00        | -10.26      | QP       | P   |        |
| 4   | 1.5584          | 12.77          | 20.30       | 33.07        | 46.00        | -12.93      | AVG      | P   |        |
| 5   | 4.2404          | 7.06           | 20.34       | 27.40        | 46.00        | -18.60      | AVG      | P   |        |
| 6   | 4.2583          | 23.81          | 20.34       | 44.15        | 56.00        | -11.85      | QP       | P   |        |
| 7   | 11.0129         | 21.09          | 20.47       | 41.56        | 60.00        | -18.44      | QP       | P   |        |
| 8   | 11.0129         | 6.79           | 20.47       | 27.26        | 50.00        | -22.74      | AVG      | P   |        |
| 9   | 12.7545         | 4.39           | 20.49       | 24.88        | 50.00        | -25.12      | AVG      | P   |        |
| 10  | 12.8580         | 15.65          | 20.49       | 36.14        | 60.00        | -23.86      | QP       | P   |        |
| 11  | 18.6044         | 4.12           | 20.52       | 24.64        | 50.00        | -25.36      | AVG      | P   |        |
| 12  | 18.6222         | 14.08          | 20.52       | 34.60        | 60.00        | -25.40      | QP       | P   |        |

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lisen factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.The test data shows only the worst case TX 802.11n20 - 5745MHz.



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

### 4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009~0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490~1.705               | 2400/F(KHz)           | 20 log (uV/m)           | 30                   |
| 1.705~30.0                | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

Limits of Radiated Emission Measurement(Above 1000MHz)

| Frequency(MHz) | Class B (dBuV/m) (at 3M) |         |
|----------------|--------------------------|---------|
|                | PEAK                     | AVERAGE |
| Above 1000     | 74                       | 54      |

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.


### 4.2.3 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.




#### 4.2.4 TEST CONFIGURATION


##### 1. For radiated emissions below 30MHz

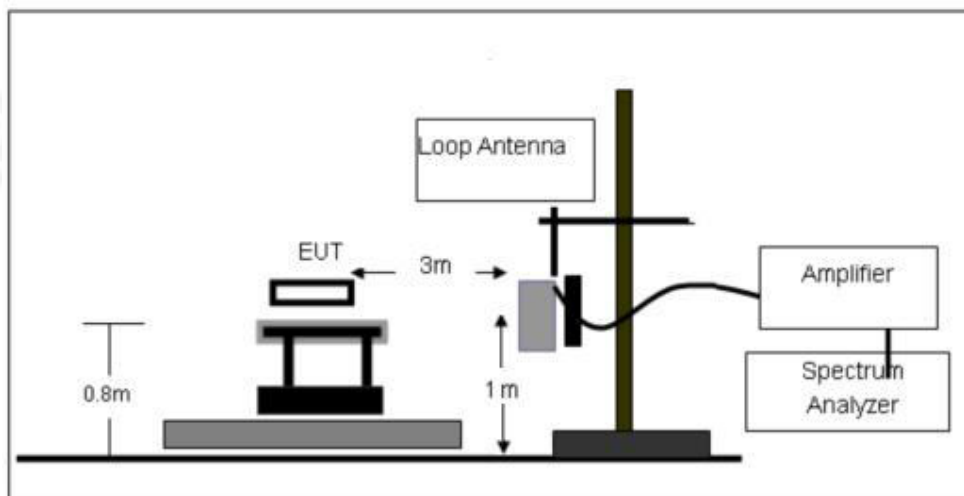

##### 2. For radiated emissions from 30MHz to 1000MHz

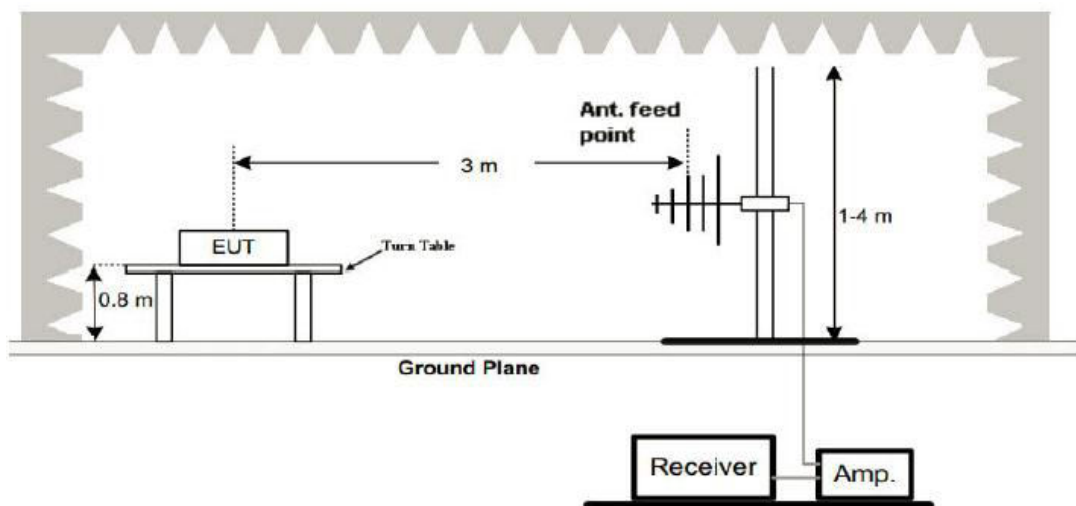

##### 3. Radiated Emission Test-Up Frequency Above 1GHz

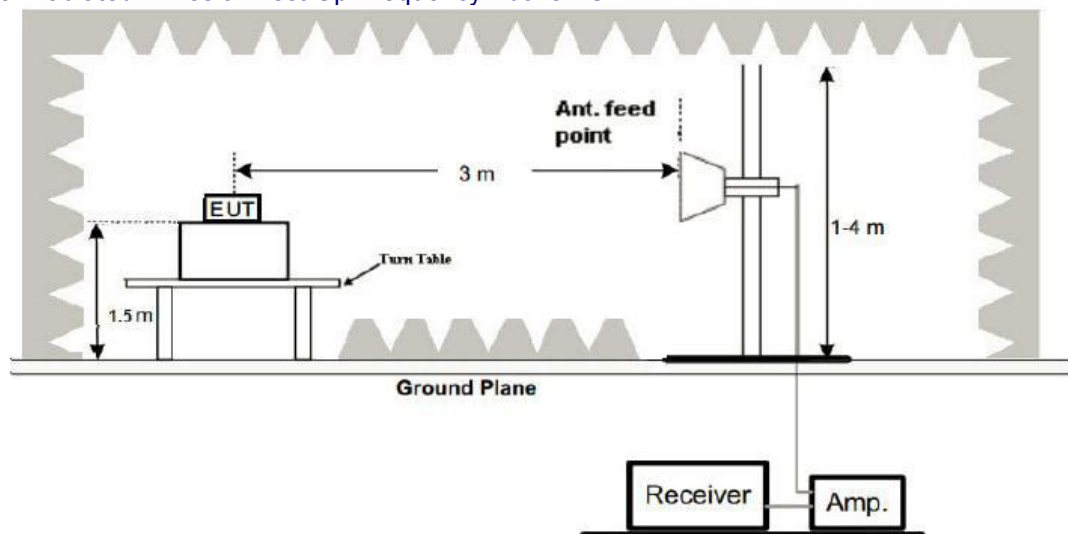



#### 4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item – EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000           | QP       | 120 kHz              | 300 kHz         |
| Above 1000           | Peak     | 1 MHz                | 1 MHz           |
|                      | Average  | 1 MHz                | 10 Hz           |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.






#### 4.2.6 TEST RESULT

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

5.2G Between 30MHz – 1GHz:

|               |         |                    |                        |
|---------------|---------|--------------------|------------------------|
| Temperature:  | 26°C    | Relative Humidity: | 54%                    |
| Pressure:     | 101 kPa | Polarization:      | Horizontal             |
| Test Voltage: | DC 9V   | Test Mode :        | TX 802.11n20 - 5180MHz |

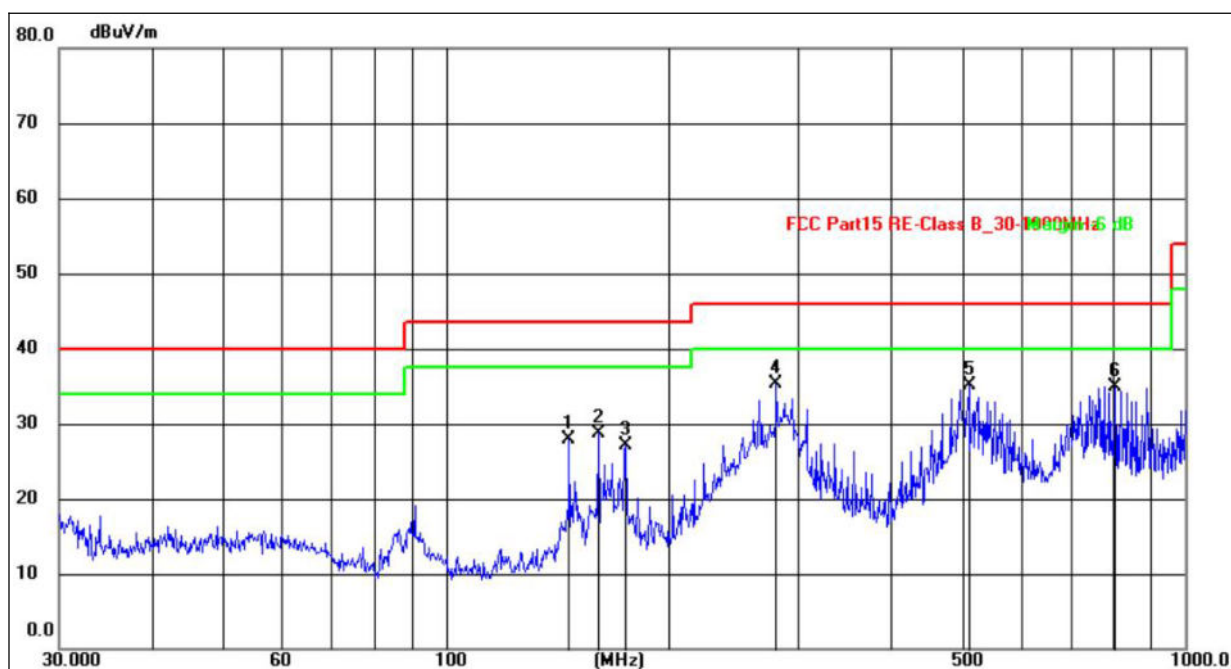


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 146.8874        | 44.34          | -16.47        | 27.87          | 43.50          | -15.63      | QP       |
| 2   | 160.9088        | 44.76          | -16.04        | 28.72          | 43.50          | -14.78      | QP       |
| 3   | 175.0364        | 44.19          | -17.17        | 27.02          | 43.50          | -16.48      | QP       |
| 4   | 280.0237        | 49.20          | -13.94        | 35.26          | 46.00          | -10.74      | QP       |
| 5   | 510.0434        | 45.83          | -10.76        | 35.07          | 46.00          | -10.93      | QP       |
| 6   | 804.6027        | 41.62          | -6.67         | 34.95          | 46.00          | -11.05      | QP       |

Note:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin= Measurement Level-Limit.
- 7.The test data shows only the worst case TX 802.11n20 - 5180MHz.



|               |        |                    |                        |
|---------------|--------|--------------------|------------------------|
| Temperature:  | 26℃    | Relative Humidity: | 54%                    |
| Pressure:     | 101kPa | Polarization:      | Vertical               |
| Test Voltage: | DC 9V  | Test Mode :        | TX 802.11n20 - 5180MHz |

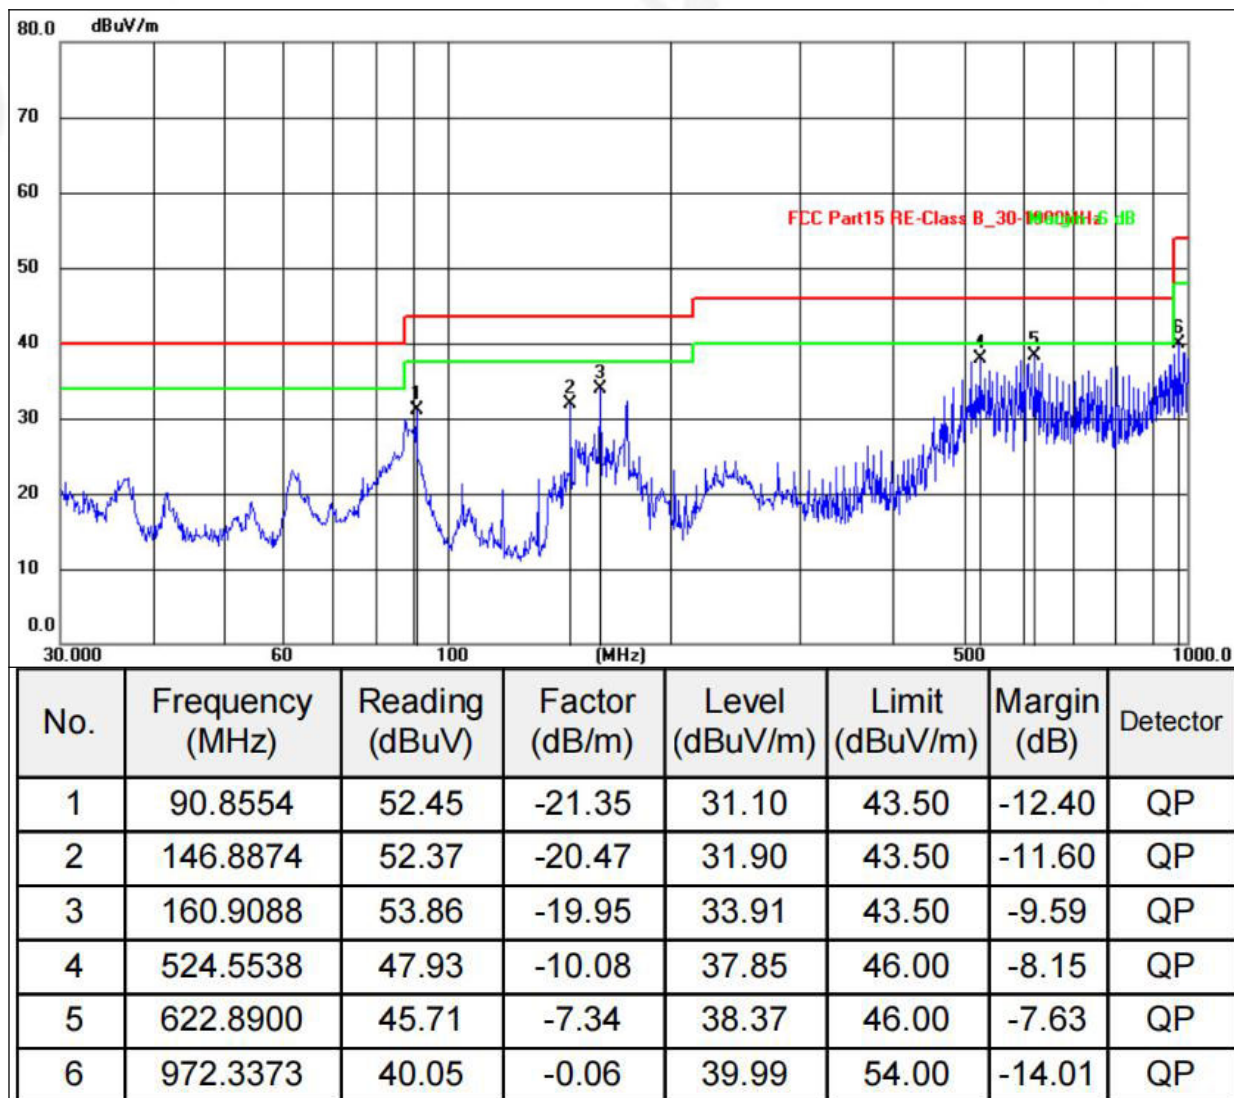


Note:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin= Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 5180MHz.



5.8G Between 30MHz – 1GHz:

|               |         |                    |                        |
|---------------|---------|--------------------|------------------------|
| Temperature:  | 26℃     | Relative Humidity: | 54%                    |
| Pressure:     | 101 kPa | Polarization:      | Horizontal             |
| Test Voltage: | DC 9V   | Test Mode :        | TX 802.11n20 - 5745MHz |

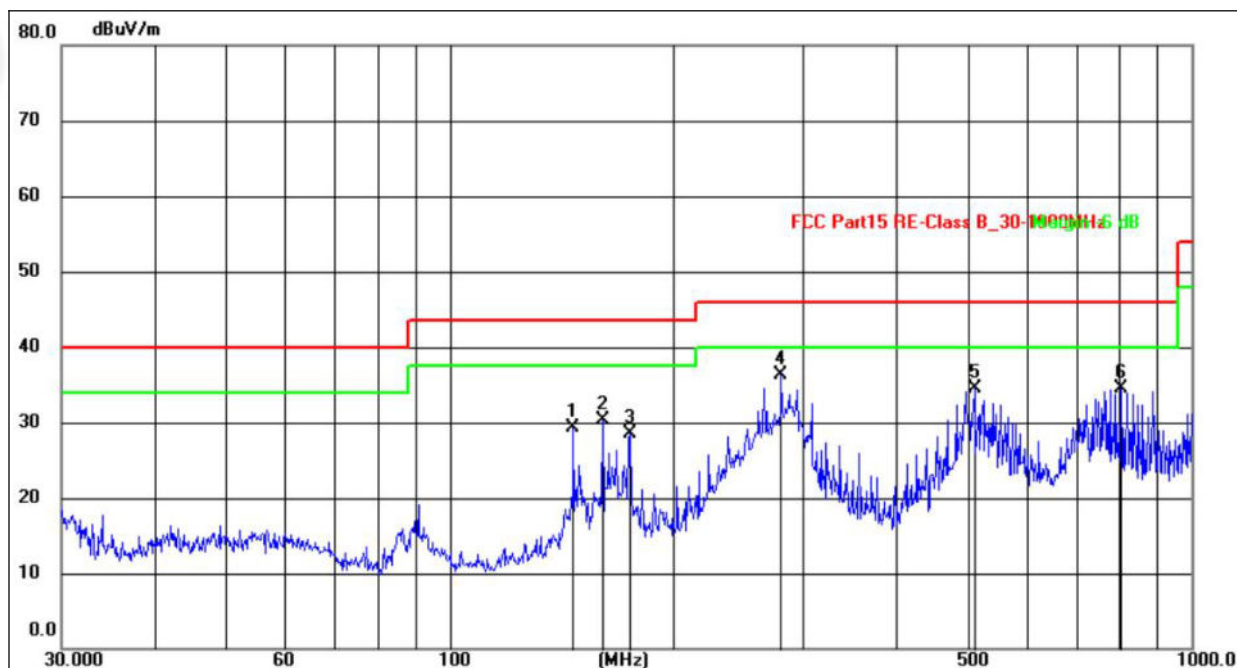

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 146.8874        | 45.84          | -16.47        | 29.37          | 43.50          | -14.13      | QP       |
| 2   | 160.9088        | 46.26          | -16.04        | 30.22          | 43.50          | -13.28      | QP       |
| 3   | 175.0363        | 45.69          | -17.17        | 28.52          | 43.50          | -14.98      | QP       |
| 4   | 280.0237        | 50.20          | -13.94        | 36.26          | 46.00          | -9.74       | QP       |
| 5   | 510.0434        | 45.33          | -10.76        | 34.57          | 46.00          | -11.43      | QP       |
| 6   | 804.6027        | 41.12          | -6.67         | 34.45          | 46.00          | -11.55      | QP       |


Note:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin= Measurement Level-Limit.
- 7.The test data shows only the worst case TX 802.11n20 - 5745MHz.





|               |        |                    |                        |
|---------------|--------|--------------------|------------------------|
| Temperature:  | 26℃    | Relative Humidity: | 54%                    |
| Pressure:     | 101kPa | Polarization:      | Vertical               |
| Test Voltage: | DC 9V  | Test Mode :        | TX 802.11n20 - 5745MHz |

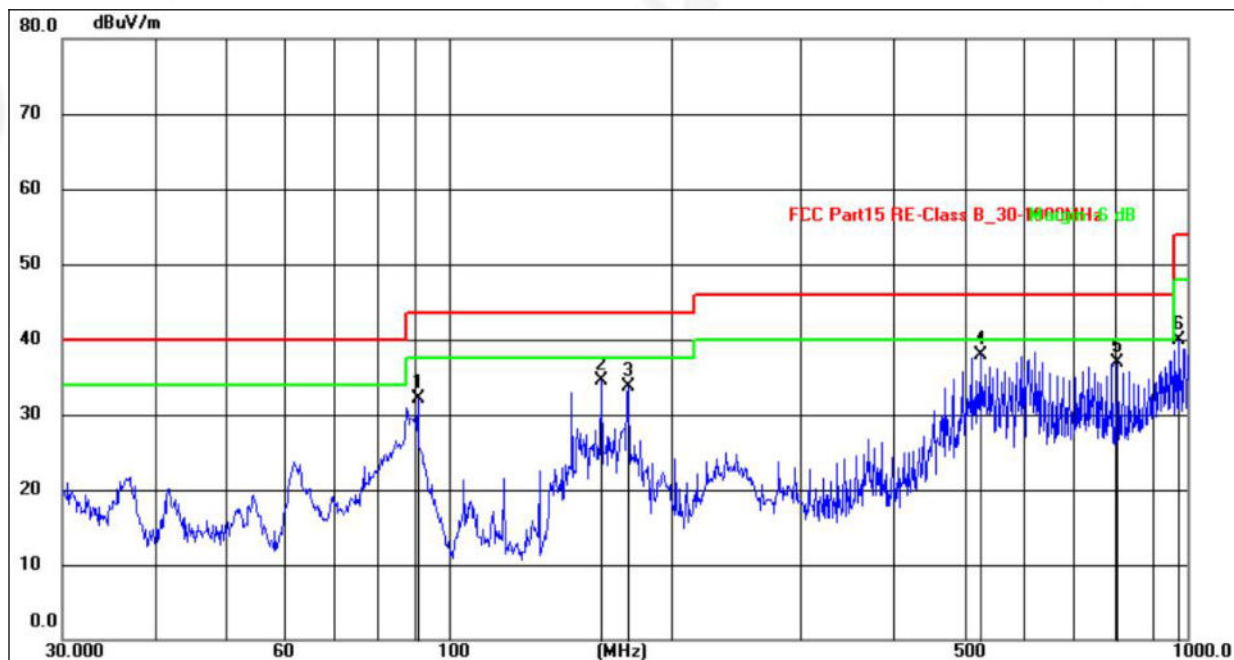

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 90.8554         | 53.45          | -21.35        | 32.10          | 43.50          | -11.40      | QP       |
| 2   | 160.9088        | 54.36          | -19.95        | 34.41          | 43.50          | -9.09       | QP       |
| 3   | 175.0363        | 53.42          | -19.67        | 33.75          | 43.50          | -9.75       | QP       |
| 4   | 524.5538        | 47.93          | -10.08        | 37.85          | 46.00          | -8.15       | QP       |
| 5   | 804.6027        | 40.14          | -3.17         | 36.97          | 46.00          | -9.03       | QP       |
| 6   | 972.3373        | 40.05          | -0.06         | 39.99          | 54.00          | -14.01      | QP       |

Note:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin= Measurement Level-Limit.
- 7.The test data shows only the worst case TX 802.11n20 - 5745MHz.



5.2G Between 1GHz – 40GHz

|                                                                                                                |                                          |                     |       |
|----------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------|-------|
| Temperature :                                                                                                  | 26℃                                      | Relative Humidity : | 54%   |
| Pressure :                                                                                                     | 1010 hPa                                 | Test Voltage :      | DC 9V |
| Test Mode :                                                                                                    | 5.2G TX - 802.11a/n20/n40/ac20/ac40/ac80 |                     |       |
| Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20. |                                          |                     |       |

802.11a

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5180MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 5150.00   | 42.32            | 30.45             | 8.77          | 38.66             | 59.30             | 74.00    | -14.70 | PK                   |
| V                   | 5150.00   | 29.50            | 30.45             | 8.77          | 38.66             | 46.48             | 54.00    | -7.52  | AV                   |
| V                   | 10360.00  | 51.88            | 30.55             | 5.77          | 24.66             | 51.76             | 74.00    | -22.24 | PK                   |
| V                   | 10360.00  | 42.84            | 30.55             | 5.77          | 24.66             | 42.72             | 54.00    | -11.28 | AV                   |
| V                   | 15540.00  | 54.14            | 30.33             | 6.32          | 24.55             | 54.68             | 74.00    | -19.32 | PK                   |
| V                   | 15540.00  | 43.47            | 30.33             | 6.32          | 24.55             | 44.01             | 54.00    | -9.99  | AV                   |
| V                   | 20720.00  | 49.52            | 30.85             | 7.45          | 24.69             | 50.81             | 74.00    | -23.19 | PK                   |
| V                   | 20720.00  | 42.51            | 30.85             | 7.45          | 24.69             | 43.80             | 54.00    | -10.20 | AV                   |
| V                   | 25900.00  | 51.54            | 31.02             | 8.99          | 25.57             | 55.08             | 74.00    | -18.92 | PK                   |
| V                   | 25900.00  | 42.99            | 31.02             | 8.99          | 25.57             | 46.53             | 54.00    | -7.47  | AV                   |
| H                   | 5150.00   | 41.84            | 30.45             | 8.77          | 38.66             | 58.82             | 74.00    | -15.18 | PK                   |
| H                   | 5150.00   | 30.08            | 30.45             | 8.77          | 38.66             | 47.06             | 54.00    | -6.94  | AV                   |
| H                   | 10360.00  | 50.36            | 30.55             | 5.77          | 24.66             | 50.24             | 74.00    | -23.76 | PK                   |
| H                   | 10360.00  | 42.77            | 30.55             | 5.77          | 24.66             | 42.65             | 54.00    | -11.35 | AV                   |
| H                   | 15540.00  | 53.65            | 30.33             | 6.32          | 24.55             | 54.19             | 74.00    | -19.81 | PK                   |
| H                   | 15540.00  | 43.53            | 30.33             | 6.32          | 24.55             | 44.07             | 54.00    | -9.93  | AV                   |
| H                   | 20720.00  | 51.44            | 30.85             | 7.45          | 24.69             | 52.73             | 74.00    | -21.27 | PK                   |
| H                   | 20720.00  | 42.51            | 30.85             | 7.45          | 24.69             | 43.80             | 54.00    | -10.20 | AV                   |
| H                   | 25900.00  | 50.27            | 31.02             | 8.99          | 25.57             | 53.81             | 74.00    | -20.19 | PK                   |
| H                   | 25900.00  | 42.69            | 31.02             | 8.99          | 25.57             | 46.23             | 54.00    | -7.77  | AV                   |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Middle Channel:5200MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                      | 5150.00   | 42.20            | 30.45             | 8.77          | 38.66             | 59.18             | 74.00    | -14.82 | PK                   |
| V                      | 5150.00   | 28.97            | 30.45             | 8.77          | 38.66             | 45.95             | 54.00    | -8.05  | AV                   |
| V                      | 10400.00  | 52.07            | 30.55             | 5.77          | 24.66             | 51.95             | 74.00    | -22.05 | PK                   |
| V                      | 10400.00  | 42.98            | 30.55             | 5.77          | 24.66             | 42.86             | 54.00    | -11.14 | AV                   |
| V                      | 15600.00  | 52.88            | 30.33             | 6.32          | 24.55             | 53.42             | 74.00    | -20.58 | PK                   |
| V                      | 15600.00  | 42.27            | 30.33             | 6.32          | 24.55             | 42.81             | 54.00    | -11.19 | AV                   |
| V                      | 20800.00  | 49.38            | 30.85             | 7.45          | 24.69             | 50.67             | 74.00    | -23.33 | PK                   |
| V                      | 20800.00  | 41.78            | 30.85             | 7.45          | 24.69             | 43.07             | 54.00    | -10.93 | AV                   |
| V                      | 26000.00  | 52.00            | 31.02             | 8.99          | 25.57             | 55.54             | 74.00    | -18.46 | PK                   |
| V                      | 26000.00  | 41.81            | 31.02             | 8.99          | 25.57             | 45.35             | 54.00    | -8.65  | AV                   |
| H                      | 5150.00   | 40.60            | 30.45             | 8.77          | 38.66             | 57.58             | 74.00    | -16.42 | PK                   |
| H                      | 5150.00   | 30.22            | 30.45             | 8.77          | 38.66             | 47.20             | 54.00    | -6.80  | AV                   |
| H                      | 10400.00  | 49.96            | 30.55             | 5.77          | 24.66             | 49.84             | 74.00    | -24.16 | PK                   |
| H                      | 10400.00  | 42.82            | 30.55             | 5.77          | 24.66             | 42.70             | 54.00    | -11.30 | AV                   |
| H                      | 15600.00  | 51.87            | 30.33             | 6.32          | 24.55             | 52.41             | 74.00    | -21.59 | PK                   |





|   |          |       |       |      |       |       |       |        |    |
|---|----------|-------|-------|------|-------|-------|-------|--------|----|
| H | 15600.00 | 42.02 | 30.33 | 6.32 | 24.55 | 42.56 | 54.00 | -11.44 | AV |
| H | 20800.00 | 49.74 | 30.85 | 7.45 | 24.69 | 51.03 | 74.00 | -22.97 | PK |
| H | 20800.00 | 43.85 | 30.85 | 7.45 | 24.69 | 45.14 | 54.00 | -8.86  | AV |
| H | 26000.00 | 50.42 | 31.02 | 8.99 | 25.57 | 53.96 | 74.00 | -20.04 | PK |
| H | 26000.00 | 42.68 | 31.02 | 8.99 | 25.57 | 46.22 | 54.00 | -7.78  | AV |

| Polar (H/V)          | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detect or Type |
|----------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|----------------|
| High Channel:5240MHz |                 |                      |                    |                 |                     |                         |                 |             |                |
| V                    | 5350.00         | 41.40                | 30.45              | 8.77            | 38.66               | 58.38                   | 74.00           | -15.62      | PK             |
| V                    | 5350.00         | 30.28                | 30.45              | 8.77            | 38.66               | 47.26                   | 54.00           | -6.74       | AV             |
| V                    | 10480.00        | 50.93                | 30.55              | 5.77            | 24.66               | 50.81                   | 74.00           | -23.19      | PK             |
| V                    | 10480.00        | 41.52                | 30.55              | 5.77            | 24.66               | 41.40                   | 54.00           | -12.60      | AV             |
| V                    | 15720.00        | 52.88                | 30.33              | 6.32            | 24.55               | 53.42                   | 74.00           | -20.58      | PK             |
| V                    | 15720.00        | 43.84                | 30.33              | 6.32            | 24.55               | 44.38                   | 54.00           | -9.62       | AV             |
| V                    | 20960.00        | 49.17                | 30.85              | 7.45            | 24.69               | 50.46                   | 74.00           | -23.54      | PK             |
| V                    | 20960.00        | 41.52                | 30.85              | 7.45            | 24.69               | 42.81                   | 54.00           | -11.19      | AV             |
| V                    | 26200.00        | 50.84                | 31.02              | 8.99            | 25.57               | 54.38                   | 74.00           | -19.62      | PK             |
| V                    | 26200.00        | 42.37                | 31.02              | 8.99            | 25.57               | 45.91                   | 54.00           | -8.09       | AV             |
| H                    | 5350.00         | 41.54                | 30.45              | 8.77            | 38.66               | 58.52                   | 74.00           | -15.48      | PK             |
| H                    | 5350.00         | 28.94                | 30.45              | 8.77            | 38.66               | 45.92                   | 54.00           | -8.08       | AV             |
| H                    | 10480.00        | 49.14                | 30.55              | 5.77            | 24.66               | 49.02                   | 74.00           | -24.98      | PK             |
| H                    | 10480.00        | 43.31                | 30.55              | 5.77            | 24.66               | 43.19                   | 54.00           | -10.81      | AV             |
| H                    | 15720.00        | 53.01                | 30.33              | 6.32            | 24.55               | 53.55                   | 74.00           | -20.45      | PK             |
| H                    | 15720.00        | 42.12                | 30.33              | 6.32            | 24.55               | 42.66                   | 54.00           | -11.34      | AV             |
| H                    | 20960.00        | 50.77                | 30.85              | 7.45            | 24.69               | 52.06                   | 74.00           | -21.94      | PK             |
| H                    | 20960.00        | 42.19                | 30.85              | 7.45            | 24.69               | 43.48                   | 54.00           | -10.52      | AV             |
| H                    | 26200.00        | 50.78                | 31.02              | 8.99            | 25.57               | 54.32                   | 74.00           | -19.68      | PK             |
| H                    | 26200.00        | 42.02                | 31.02              | 8.99            | 25.57               | 45.56                   | 54.00           | -8.44       | AV             |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5180MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 5150.00   | 41.31            | 30.45             | 8.77          | 38.66             | 58.29             | 74.00    | -15.71 | PK                   |
| V                   | 5150.00   | 29.19            | 30.45             | 8.77          | 38.66             | 46.17             | 54.00    | -7.83  | AV                   |
| V                   | 10360.00  | 51.81            | 30.55             | 5.77          | 24.66             | 51.69             | 74.00    | -22.31 | PK                   |
| V                   | 10360.00  | 42.69            | 30.55             | 5.77          | 24.66             | 42.57             | 54.00    | -11.43 | AV                   |
| V                   | 15540.00  | 53.36            | 30.33             | 6.32          | 24.55             | 53.90             | 74.00    | -20.10 | PK                   |
| V                   | 15540.00  | 42.51            | 30.33             | 6.32          | 24.55             | 43.05             | 54.00    | -10.95 | AV                   |
| V                   | 20720.00  | 49.73            | 30.85             | 7.45          | 24.69             | 51.02             | 74.00    | -22.98 | PK                   |
| V                   | 20720.00  | 42.62            | 30.85             | 7.45          | 24.69             | 43.91             | 54.00    | -10.09 | AV                   |
| V                   | 25900.00  | 51.06            | 31.02             | 8.99          | 25.57             | 54.60             | 74.00    | -19.40 | PK                   |
| V                   | 25900.00  | 43.23            | 31.02             | 8.99          | 25.57             | 46.77             | 54.00    | -7.23  | AV                   |
| H                   | 5150.00   | 41.60            | 30.45             | 8.77          | 38.66             | 58.58             | 74.00    | -15.42 | PK                   |
| H                   | 5150.00   | 30.34            | 30.45             | 8.77          | 38.66             | 47.32             | 54.00    | -6.68  | AV                   |
| H                   | 10360.00  | 50.03            | 30.55             | 5.77          | 24.66             | 49.91             | 74.00    | -24.09 | PK                   |
| H                   | 10360.00  | 42.54            | 30.55             | 5.77          | 24.66             | 42.42             | 54.00    | -11.58 | AV                   |
| H                   | 15540.00  | 53.11            | 30.33             | 6.32          | 24.55             | 53.65             | 74.00    | -20.35 | PK                   |
| H                   | 15540.00  | 42.88            | 30.33             | 6.32          | 24.55             | 43.42             | 54.00    | -10.58 | AV                   |
| H                   | 20720.00  | 51.76            | 30.85             | 7.45          | 24.69             | 53.05             | 74.00    | -20.95 | PK                   |
| H                   | 20720.00  | 42.71            | 30.85             | 7.45          | 24.69             | 44.00             | 54.00    | -10.00 | AV                   |
| H                   | 25900.00  | 50.23            | 31.02             | 8.99          | 25.57             | 53.77             | 74.00    | -20.23 | PK                   |
| H                   | 25900.00  | 42.14            | 31.02             | 8.99          | 25.57             | 45.68             | 54.00    | -8.32  | AV                   |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Middle Channel:5200MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                      | 5150.00   | 42.16            | 30.45             | 8.77          | 38.66             | 59.14             | 74.00    | -14.86 | PK                   |
| V                      | 5150.00   | 29.98            | 30.45             | 8.77          | 38.66             | 46.96             | 54.00    | -7.04  | AV                   |
| V                      | 10400.00  | 52.00            | 30.55             | 5.77          | 24.66             | 51.88             | 74.00    | -22.12 | PK                   |
| V                      | 10400.00  | 42.47            | 30.55             | 5.77          | 24.66             | 42.35             | 54.00    | -11.65 | AV                   |
| V                      | 15600.00  | 54.38            | 30.33             | 6.32          | 24.55             | 54.92             | 74.00    | -19.08 | PK                   |
| V                      | 15600.00  | 42.58            | 30.33             | 6.32          | 24.55             | 43.12             | 54.00    | -10.88 | AV                   |
| V                      | 20800.00  | 48.73            | 30.85             | 7.45          | 24.69             | 50.02             | 74.00    | -23.98 | PK                   |
| V                      | 20800.00  | 42.95            | 30.85             | 7.45          | 24.69             | 44.24             | 54.00    | -9.76  | AV                   |
| V                      | 26000.00  | 51.62            | 31.02             | 8.99          | 25.57             | 55.16             | 74.00    | -18.84 | PK                   |
| V                      | 26000.00  | 42.05            | 31.02             | 8.99          | 25.57             | 45.59             | 54.00    | -8.41  | AV                   |
| H                      | 5150.00   | 42.11            | 30.45             | 8.77          | 38.66             | 59.09             | 74.00    | -14.91 | PK                   |
| H                      | 5150.00   | 29.10            | 30.45             | 8.77          | 38.66             | 46.08             | 54.00    | -7.92  | AV                   |
| H                      | 10400.00  | 49.03            | 30.55             | 5.77          | 24.66             | 48.91             | 74.00    | -25.09 | PK                   |
| H                      | 10400.00  | 42.68            | 30.55             | 5.77          | 24.66             | 42.56             | 54.00    | -11.44 | AV                   |
| H                      | 15600.00  | 52.95            | 30.33             | 6.32          | 24.55             | 53.49             | 74.00    | -20.51 | PK                   |
| H                      | 15600.00  | 42.69            | 30.33             | 6.32          | 24.55             | 43.23             | 54.00    | -10.77 | AV                   |
| H                      | 20800.00  | 49.71            | 30.85             | 7.45          | 24.69             | 51.00             | 74.00    | -23.00 | PK                   |
| H                      | 20800.00  | 42.82            | 30.85             | 7.45          | 24.69             | 44.11             | 54.00    | -9.89  | AV                   |
| H                      | 26000.00  | 49.49            | 31.02             | 8.99          | 25.57             | 53.03             | 74.00    | -20.97 | PK                   |
| H                      | 26000.00  | 43.75            | 31.02             | 8.99          | 25.57             | 47.29             | 54.00    | -6.71  | AV                   |



| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| High Channel:5240MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                    | 5350.00   | 40.40            | 30.45             | 8.77          | 38.66             | 57.38             | 74.00    | -16.62 | PK                   |
| V                    | 5350.00   | 30.29            | 30.45             | 8.77          | 38.66             | 47.27             | 54.00    | -6.73  | AV                   |
| V                    | 10480.00  | 51.11            | 30.55             | 5.77          | 24.66             | 50.99             | 74.00    | -23.01 | PK                   |
| V                    | 10480.00  | 43.09            | 30.55             | 5.77          | 24.66             | 42.97             | 54.00    | -11.03 | AV                   |
| V                    | 15720.00  | 53.80            | 30.33             | 6.32          | 24.55             | 54.34             | 74.00    | -19.66 | PK                   |
| V                    | 15720.00  | 43.09            | 30.33             | 6.32          | 24.55             | 43.63             | 54.00    | -10.37 | AV                   |
| V                    | 20960.00  | 48.54            | 30.85             | 7.45          | 24.69             | 49.83             | 74.00    | -24.17 | PK                   |
| V                    | 20960.00  | 42.30            | 30.85             | 7.45          | 24.69             | 43.59             | 54.00    | -10.41 | AV                   |
| V                    | 26200.00  | 52.21            | 31.02             | 8.99          | 25.57             | 55.75             | 74.00    | -18.25 | PK                   |
| V                    | 26200.00  | 42.60            | 31.02             | 8.99          | 25.57             | 46.14             | 54.00    | -7.86  | AV                   |
| H                    | 5350.00   | 41.16            | 30.45             | 8.77          | 38.66             | 58.14             | 74.00    | -15.86 | PK                   |
| H                    | 5350.00   | 29.52            | 30.45             | 8.77          | 38.66             | 46.50             | 54.00    | -7.50  | AV                   |
| H                    | 10480.00  | 49.80            | 30.55             | 5.77          | 24.66             | 49.68             | 74.00    | -24.32 | PK                   |
| H                    | 10480.00  | 43.67            | 30.55             | 5.77          | 24.66             | 43.55             | 54.00    | -10.45 | AV                   |
| H                    | 15720.00  | 52.56            | 30.33             | 6.32          | 24.55             | 53.10             | 74.00    | -20.90 | PK                   |
| H                    | 15720.00  | 43.19            | 30.33             | 6.32          | 24.55             | 43.73             | 54.00    | -10.27 | AV                   |
| H                    | 20960.00  | 50.08            | 30.85             | 7.45          | 24.69             | 51.37             | 74.00    | -22.63 | PK                   |
| H                    | 20960.00  | 43.54            | 30.85             | 7.45          | 24.69             | 44.83             | 54.00    | -9.17  | AV                   |
| H                    | 26200.00  | 49.79            | 31.02             | 8.99          | 25.57             | 53.33             | 74.00    | -20.67 | PK                   |
| H                    | 26200.00  | 42.61            | 31.02             | 8.99          | 25.57             | 46.15             | 54.00    | -7.85  | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11ac20

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5180MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 5150.00   | 41.37            | 30.45             | 8.77          | 38.66             | 58.35             | 74.00    | -15.65 | PK                   |
| V                   | 5150.00   | 29.87            | 30.45             | 8.77          | 38.66             | 46.85             | 54.00    | -7.15  | AV                   |
| V                   | 10360.00  | 51.84            | 30.55             | 5.77          | 24.66             | 51.72             | 74.00    | -22.28 | PK                   |
| V                   | 10360.00  | 43.04            | 30.55             | 5.77          | 24.66             | 42.92             | 54.00    | -11.08 | AV                   |
| V                   | 15540.00  | 54.08            | 30.33             | 6.32          | 24.55             | 54.62             | 74.00    | -19.38 | PK                   |
| V                   | 15540.00  | 42.32            | 30.33             | 6.32          | 24.55             | 42.86             | 54.00    | -11.14 | AV                   |
| V                   | 20720.00  | 49.78            | 30.85             | 7.45          | 24.69             | 51.07             | 74.00    | -22.93 | PK                   |
| V                   | 20720.00  | 42.87            | 30.85             | 7.45          | 24.69             | 44.16             | 54.00    | -9.84  | AV                   |
| V                   | 25900.00  | 52.15            | 31.02             | 8.99          | 25.57             | 55.69             | 74.00    | -18.31 | PK                   |
| V                   | 25900.00  | 42.76            | 31.02             | 8.99          | 25.57             | 46.30             | 54.00    | -7.70  | AV                   |
| H                   | 5150.00   | 42.20            | 30.45             | 8.77          | 38.66             | 59.18             | 74.00    | -14.82 | PK                   |
| H                   | 5150.00   | 30.02            | 30.45             | 8.77          | 38.66             | 47.00             | 54.00    | -7.00  | AV                   |
| H                   | 10360.00  | 50.66            | 30.55             | 5.77          | 24.66             | 50.54             | 74.00    | -23.46 | PK                   |
| H                   | 10360.00  | 42.96            | 30.55             | 5.77          | 24.66             | 42.84             | 54.00    | -11.16 | AV                   |
| H                   | 15540.00  | 53.68            | 30.33             | 6.32          | 24.55             | 54.22             | 74.00    | -19.78 | PK                   |
| H                   | 15540.00  | 43.69            | 30.33             | 6.32          | 24.55             | 44.23             | 54.00    | -9.77  | AV                   |
| H                   | 20720.00  | 51.74            | 30.85             | 7.45          | 24.69             | 53.03             | 74.00    | -20.97 | PK                   |
| H                   | 20720.00  | 43.41            | 30.85             | 7.45          | 24.69             | 44.70             | 54.00    | -9.30  | AV                   |
| H                   | 25900.00  | 50.55            | 31.02             | 8.99          | 25.57             | 54.09             | 74.00    | -19.91 | PK                   |
| H                   | 25900.00  | 42.45            | 31.02             | 8.99          | 25.57             | 45.99             | 54.00    | -8.01  | AV                   |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Middle Channel:5200MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                      | 5150.00   | 41.60            | 30.45             | 8.77          | 38.66             | 58.58             | 74.00    | -15.42 | PK                   |
| V                      | 5150.00   | 29.23            | 30.45             | 8.77          | 38.66             | 46.21             | 54.00    | -7.79  | AV                   |
| V                      | 10400.00  | 52.48            | 30.55             | 5.77          | 24.66             | 52.36             | 74.00    | -21.64 | PK                   |
| V                      | 10400.00  | 43.61            | 30.55             | 5.77          | 24.66             | 43.49             | 54.00    | -10.51 | AV                   |
| V                      | 15600.00  | 52.58            | 30.33             | 6.32          | 24.55             | 53.12             | 74.00    | -20.88 | PK                   |
| V                      | 15600.00  | 41.84            | 30.33             | 6.32          | 24.55             | 42.38             | 54.00    | -11.62 | AV                   |
| V                      | 20800.00  | 50.11            | 30.85             | 7.45          | 24.69             | 51.40             | 74.00    | -22.60 | PK                   |
| V                      | 20800.00  | 41.73            | 30.85             | 7.45          | 24.69             | 43.02             | 54.00    | -10.98 | AV                   |
| V                      | 26000.00  | 50.54            | 31.02             | 8.99          | 25.57             | 54.08             | 74.00    | -19.92 | PK                   |
| V                      | 26000.00  | 42.64            | 31.02             | 8.99          | 25.57             | 46.18             | 54.00    | -7.82  | AV                   |
| H                      | 5150.00   | 41.46            | 30.45             | 8.77          | 38.66             | 58.44             | 74.00    | -15.56 | PK                   |
| H                      | 5150.00   | 29.86            | 30.45             | 8.77          | 38.66             | 46.84             | 54.00    | -7.16  | AV                   |
| H                      | 10400.00  | 49.15            | 30.55             | 5.77          | 24.66             | 49.03             | 74.00    | -24.97 | PK                   |
| H                      | 10400.00  | 41.43            | 30.55             | 5.77          | 24.66             | 41.31             | 54.00    | -12.69 | AV                   |
| H                      | 15600.00  | 53.06            | 30.33             | 6.32          | 24.55             | 53.60             | 74.00    | -20.40 | PK                   |
| H                      | 15600.00  | 42.70            | 30.33             | 6.32          | 24.55             | 43.24             | 54.00    | -10.76 | AV                   |
| H                      | 20800.00  | 51.38            | 30.85             | 7.45          | 24.69             | 52.67             | 74.00    | -21.33 | PK                   |
| H                      | 20800.00  | 42.51            | 30.85             | 7.45          | 24.69             | 43.80             | 54.00    | -10.20 | AV                   |
| H                      | 26000.00  | 49.36            | 31.02             | 8.99          | 25.57             | 52.90             | 74.00    | -21.10 | PK                   |
| H                      | 26000.00  | 43.64            | 31.02             | 8.99          | 25.57             | 47.18             | 54.00    | -6.82  | AV                   |



| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| High Channel:5240MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                    | 5350.00   | 41.52            | 30.45             | 8.77          | 38.66             | 58.50             | 74.00    | -15.50 | PK                   |
| V                    | 5350.00   | 30.05            | 30.45             | 8.77          | 38.66             | 47.03             | 54.00    | -6.97  | AV                   |
| V                    | 10480.00  | 51.13            | 30.55             | 5.77          | 24.66             | 51.01             | 74.00    | -22.99 | PK                   |
| V                    | 10480.00  | 42.82            | 30.55             | 5.77          | 24.66             | 42.70             | 54.00    | -11.30 | AV                   |
| V                    | 15720.00  | 53.68            | 30.33             | 6.32          | 24.55             | 54.22             | 74.00    | -19.78 | PK                   |
| V                    | 15720.00  | 43.25            | 30.33             | 6.32          | 24.55             | 43.79             | 54.00    | -10.21 | AV                   |
| V                    | 20960.00  | 49.29            | 30.85             | 7.45          | 24.69             | 50.58             | 74.00    | -23.42 | PK                   |
| V                    | 20960.00  | 42.21            | 30.85             | 7.45          | 24.69             | 43.50             | 54.00    | -10.50 | AV                   |
| V                    | 26200.00  | 52.09            | 31.02             | 8.99          | 25.57             | 55.63             | 74.00    | -18.37 | PK                   |
| V                    | 26200.00  | 41.69            | 31.02             | 8.99          | 25.57             | 45.23             | 54.00    | -8.77  | AV                   |
| H                    | 5350.00   | 41.63            | 30.45             | 8.77          | 38.66             | 58.61             | 74.00    | -15.39 | PK                   |
| H                    | 5350.00   | 29.41            | 30.45             | 8.77          | 38.66             | 46.39             | 54.00    | -7.61  | AV                   |
| H                    | 10480.00  | 48.86            | 30.55             | 5.77          | 24.66             | 48.74             | 74.00    | -25.26 | PK                   |
| H                    | 10480.00  | 42.29            | 30.55             | 5.77          | 24.66             | 42.17             | 54.00    | -11.83 | AV                   |
| H                    | 15720.00  | 51.99            | 30.33             | 6.32          | 24.55             | 52.53             | 74.00    | -21.47 | PK                   |
| H                    | 15720.00  | 41.67            | 30.33             | 6.32          | 24.55             | 42.21             | 54.00    | -11.79 | AV                   |
| H                    | 20960.00  | 50.60            | 30.85             | 7.45          | 24.69             | 51.89             | 74.00    | -22.11 | PK                   |
| H                    | 20960.00  | 42.58            | 30.85             | 7.45          | 24.69             | 43.87             | 54.00    | -10.13 | AV                   |
| H                    | 26200.00  | 50.61            | 31.02             | 8.99          | 25.57             | 54.15             | 74.00    | -19.85 | PK                   |
| H                    | 26200.00  | 43.45            | 31.02             | 8.99          | 25.57             | 46.99             | 54.00    | -7.01  | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





5.8G Between 1GHz – 40GHz:

|                                                                                                                |                                          |                     |       |
|----------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------|-------|
| Temperature :                                                                                                  | 26℃                                      | Relative Humidity : | 54%   |
| Pressure :                                                                                                     | 1010 hPa                                 | Test Voltage :      | DC 9V |
| Test Mode :                                                                                                    | 5.8G TX - 802.11a/n20/n40/ac20/ac40/ac80 |                     |       |
| Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20. |                                          |                     |       |

802.11a

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5745MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 11490.00  | 50.52            | 30.55             | 5.77          | 24.66             | 50.40             | 74.00    | -23.60 | PK                   |
| V                   | 11490.00  | 43.59            | 30.55             | 5.77          | 24.66             | 43.47             | 54.00    | -10.53 | AV                   |
| V                   | 17235.00  | 51.58            | 30.33             | 6.32          | 24.55             | 52.12             | 68.20    | -16.08 | PK                   |
| V                   | 17235.00  | 42.04            | 30.33             | 6.32          | 24.55             | 42.58             | 54.00    | -11.42 | AV                   |
| V                   | 22980.00  | 48.97            | 30.85             | 7.45          | 24.69             | 50.26             | 74.00    | -23.74 | PK                   |
| V                   | 22980.00  | 42.73            | 30.85             | 7.45          | 24.69             | 44.02             | 54.00    | -9.98  | AV                   |
| V                   | 28725.00  | 52.93            | 31.02             | 8.99          | 25.57             | 56.47             | 68.20    | -11.73 | PK                   |
| V                   | 28725.00  | 43.25            | 31.02             | 8.99          | 25.57             | 46.79             | 54.00    | -7.21  | AV                   |
| H                   | 11490.00  | 51.75            | 30.55             | 5.77          | 24.66             | 51.63             | 74.00    | -22.37 | PK                   |
| H                   | 11490.00  | 43.73            | 30.55             | 5.77          | 24.66             | 43.61             | 54.00    | -10.39 | AV                   |
| H                   | 17235.00  | 53.17            | 30.33             | 6.32          | 24.55             | 53.71             | 68.20    | -14.49 | PK                   |
| H                   | 17235.00  | 42.89            | 30.33             | 6.32          | 24.55             | 43.43             | 54.00    | -10.57 | AV                   |
| H                   | 22980.00  | 51.38            | 30.85             | 7.45          | 24.69             | 52.67             | 74.00    | -21.33 | PK                   |
| H                   | 22980.00  | 43.36            | 30.85             | 7.45          | 24.69             | 44.65             | 54.00    | -9.35  | AV                   |
| H                   | 28725.00  | 51.45            | 31.02             | 8.99          | 25.57             | 54.99             | 68.20    | -13.21 | PK                   |
| H                   | 28725.00  | 43.58            | 31.02             | 8.99          | 25.57             | 47.12             | 54.00    | -6.88  | AV                   |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Middle Channel:5785MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                      | 11570.00  | 49.18            | 30.55             | 5.77          | 24.66             | 49.06             | 74.00    | -24.94 | PK                   |
| V                      | 11570.00  | 41.99            | 30.55             | 5.77          | 24.66             | 41.87             | 54.00    | -12.13 | AV                   |
| V                      | 17355.00  | 48.28            | 30.33             | 6.32          | 24.55             | 48.82             | 68.20    | -19.38 | PK                   |
| V                      | 17355.00  | 41.48            | 30.33             | 6.32          | 24.55             | 42.02             | 54.00    | -11.98 | AV                   |
| V                      | 23140.00  | 50.79            | 30.85             | 7.45          | 24.69             | 52.08             | 68.20    | -16.12 | PK                   |
| V                      | 23140.00  | 41.53            | 30.85             | 7.45          | 24.69             | 42.82             | 54.00    | -11.18 | AV                   |
| V                      | 28925.00  | 48.31            | 31.02             | 8.99          | 25.57             | 51.85             | 68.20    | -16.35 | PK                   |
| V                      | 28925.00  | 41.69            | 31.02             | 8.99          | 25.57             | 45.23             | 54.00    | -8.77  | AV                   |
| H                      | 11570.00  | 48.69            | 30.55             | 5.77          | 24.66             | 48.57             | 74.00    | -25.43 | PK                   |
| H                      | 11570.00  | 41.63            | 30.55             | 5.77          | 24.66             | 41.51             | 54.00    | -12.49 | AV                   |
| H                      | 17355.00  | 52.68            | 30.33             | 6.32          | 24.55             | 53.22             | 68.20    | -14.98 | PK                   |
| H                      | 17355.00  | 41.28            | 30.33             | 6.32          | 24.55             | 41.82             | 54.00    | -12.18 | AV                   |
| H                      | 23140.00  | 50.69            | 30.85             | 7.45          | 24.69             | 51.98             | 68.20    | -16.22 | PK                   |
| H                      | 23140.00  | 41.60            | 30.85             | 7.45          | 24.69             | 42.89             | 54.00    | -11.11 | AV                   |
| H                      | 28925.00  | 48.09            | 31.02             | 8.99          | 25.57             | 51.63             | 68.20    | -16.57 | PK                   |
| H                      | 28925.00  | 41.66            | 31.02             | 8.99          | 25.57             | 45.20             | 54.00    | -8.80  | AV                   |



| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| High Channel:5825MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                    | 11650.00  | 50.18            | 30.55             | 5.77          | 24.66             | 50.06             | 74.00    | -23.94 | PK                   |
| V                    | 11650.00  | 41.59            | 30.55             | 5.77          | 24.66             | 41.47             | 54.00    | -12.53 | AV                   |
| V                    | 17475.00  | 48.11            | 30.33             | 6.32          | 24.55             | 48.65             | 68.20    | -19.55 | PK                   |
| V                    | 17475.00  | 40.91            | 30.33             | 6.32          | 24.55             | 41.45             | 54.00    | -12.55 | AV                   |
| V                    | 23300.00  | 49.18            | 30.85             | 7.45          | 24.69             | 50.47             | 68.20    | -17.73 | PK                   |
| V                    | 23300.00  | 41.03            | 30.85             | 7.45          | 24.69             | 42.32             | 54.00    | -11.68 | AV                   |
| V                    | 29125.00  | 51.83            | 31.02             | 8.99          | 25.57             | 55.37             | 68.20    | -12.83 | PK                   |
| V                    | 29125.00  | 41.07            | 31.02             | 8.99          | 25.57             | 44.61             | 54.00    | -9.39  | AV                   |
| H                    | 11650.00  | 50.82            | 30.55             | 5.77          | 24.66             | 50.70             | 74.00    | -23.30 | PK                   |
| H                    | 11650.00  | 40.94            | 30.55             | 5.77          | 24.66             | 40.82             | 54.00    | -13.18 | AV                   |
| H                    | 17475.00  | 51.50            | 30.33             | 6.32          | 24.55             | 52.04             | 68.20    | -16.16 | PK                   |
| H                    | 17475.00  | 41.16            | 30.33             | 6.32          | 24.55             | 41.70             | 54.00    | -12.30 | AV                   |
| H                    | 23300.00  | 52.05            | 30.85             | 7.45          | 24.69             | 53.34             | 68.20    | -14.86 | PK                   |
| H                    | 23300.00  | 41.52            | 30.85             | 7.45          | 24.69             | 42.81             | 54.00    | -11.19 | AV                   |
| H                    | 29125.00  | 48.32            | 31.02             | 8.99          | 25.57             | 51.86             | 68.20    | -16.34 | PK                   |
| H                    | 29125.00  | 41.33            | 31.02             | 8.99          | 25.57             | 44.87             | 54.00    | -9.13  | AV                   |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5745MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 11490.00  | 50.67            | 30.55             | 5.77          | 24.66             | 50.55             | 74.00    | -23.45 | PK                   |
| V                   | 11490.00  | 43.58            | 30.55             | 5.77          | 24.66             | 43.46             | 54.00    | -10.54 | AV                   |
| V                   | 17235.00  | 51.42            | 30.33             | 6.32          | 24.55             | 51.96             | 68.20    | -16.24 | PK                   |
| V                   | 17235.00  | 42.31            | 30.33             | 6.32          | 24.55             | 42.85             | 54.00    | -11.15 | AV                   |
| V                   | 22980.00  | 48.93            | 30.85             | 7.45          | 24.69             | 50.22             | 74.00    | -23.78 | PK                   |
| V                   | 22980.00  | 43.03            | 30.85             | 7.45          | 24.69             | 44.32             | 54.00    | -9.68  | AV                   |
| V                   | 28725.00  | 52.35            | 31.02             | 8.99          | 25.57             | 55.89             | 68.20    | -12.31 | PK                   |
| V                   | 28725.00  | 42.34            | 31.02             | 8.99          | 25.57             | 45.88             | 54.00    | -8.12  | AV                   |
| H                   | 11490.00  | 52.18            | 30.55             | 5.77          | 24.66             | 52.06             | 74.00    | -21.94 | PK                   |
| H                   | 11490.00  | 42.91            | 30.55             | 5.77          | 24.66             | 42.79             | 54.00    | -11.21 | AV                   |
| H                   | 17235.00  | 53.15            | 30.33             | 6.32          | 24.55             | 53.69             | 68.20    | -14.51 | PK                   |
| H                   | 17235.00  | 43.06            | 30.33             | 6.32          | 24.55             | 43.60             | 54.00    | -10.40 | AV                   |
| H                   | 22980.00  | 50.70            | 30.85             | 7.45          | 24.69             | 51.99             | 74.00    | -22.01 | PK                   |
| H                   | 22980.00  | 42.56            | 30.85             | 7.45          | 24.69             | 43.85             | 54.00    | -10.15 | AV                   |
| H                   | 28725.00  | 52.22            | 31.02             | 8.99          | 25.57             | 55.76             | 68.20    | -12.44 | PK                   |
| H                   | 28725.00  | 43.67            | 31.02             | 8.99          | 25.57             | 47.21             | 54.00    | -6.79  | AV                   |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Middle Channel:5785MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                      | 11570.00  | 49.13            | 30.55             | 5.77          | 24.66             | 49.01             | 74.00    | -24.99 | PK                   |
| V                      | 11570.00  | 41.99            | 30.55             | 5.77          | 24.66             | 41.87             | 54.00    | -12.13 | AV                   |
| V                      | 17355.00  | 48.52            | 30.33             | 6.32          | 24.55             | 49.06             | 68.20    | -19.14 | PK                   |
| V                      | 17355.00  | 41.54            | 30.33             | 6.32          | 24.55             | 42.08             | 54.00    | -11.92 | AV                   |
| V                      | 23140.00  | 50.39            | 30.85             | 7.45          | 24.69             | 51.68             | 68.20    | -16.52 | PK                   |
| V                      | 23140.00  | 41.29            | 30.85             | 7.45          | 24.69             | 42.58             | 54.00    | -11.42 | AV                   |
| V                      | 28925.00  | 48.72            | 31.02             | 8.99          | 25.57             | 52.26             | 68.20    | -15.94 | PK                   |
| V                      | 28925.00  | 41.41            | 31.02             | 8.99          | 25.57             | 44.95             | 54.00    | -9.05  | AV                   |
| H                      | 11570.00  | 48.73            | 30.55             | 5.77          | 24.66             | 48.61             | 74.00    | -25.39 | PK                   |
| H                      | 11570.00  | 42.01            | 30.55             | 5.77          | 24.66             | 41.89             | 54.00    | -12.11 | AV                   |
| H                      | 17355.00  | 52.83            | 30.33             | 6.32          | 24.55             | 53.37             | 68.20    | -14.83 | PK                   |
| H                      | 17355.00  | 41.21            | 30.33             | 6.32          | 24.55             | 41.75             | 54.00    | -12.25 | AV                   |
| H                      | 23140.00  | 50.23            | 30.85             | 7.45          | 24.69             | 51.52             | 68.20    | -16.68 | PK                   |
| H                      | 23140.00  | 41.73            | 30.85             | 7.45          | 24.69             | 43.02             | 54.00    | -10.98 | AV                   |
| H                      | 28925.00  | 48.56            | 31.02             | 8.99          | 25.57             | 52.10             | 68.20    | -16.10 | PK                   |
| H                      | 28925.00  | 41.93            | 31.02             | 8.99          | 25.57             | 45.47             | 54.00    | -8.53  | AV                   |



| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| High Channel:5825MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                    | 11650.00  | 50.21            | 30.55             | 5.77          | 24.66             | 50.09             | 74.00    | -23.91 | PK                   |
| V                    | 11650.00  | 41.15            | 30.55             | 5.77          | 24.66             | 41.03             | 54.00    | -12.97 | AV                   |
| V                    | 17475.00  | 48.50            | 30.33             | 6.32          | 24.55             | 49.04             | 68.20    | -19.16 | PK                   |
| V                    | 17475.00  | 41.39            | 30.33             | 6.32          | 24.55             | 41.93             | 54.00    | -12.07 | AV                   |
| V                    | 23300.00  | 49.62            | 30.85             | 7.45          | 24.69             | 50.91             | 68.20    | -17.29 | PK                   |
| V                    | 23300.00  | 41.14            | 30.85             | 7.45          | 24.69             | 42.43             | 54.00    | -11.57 | AV                   |
| V                    | 29125.00  | 51.99            | 31.02             | 8.99          | 25.57             | 55.53             | 68.20    | -12.67 | PK                   |
| V                    | 29125.00  | 41.48            | 31.02             | 8.99          | 25.57             | 45.02             | 54.00    | -8.98  | AV                   |
| H                    | 11650.00  | 50.96            | 30.55             | 5.77          | 24.66             | 50.84             | 74.00    | -23.16 | PK                   |
| H                    | 11650.00  | 41.11            | 30.55             | 5.77          | 24.66             | 40.99             | 54.00    | -13.01 | AV                   |
| H                    | 17475.00  | 51.03            | 30.33             | 6.32          | 24.55             | 51.57             | 68.20    | -16.63 | PK                   |
| H                    | 17475.00  | 41.30            | 30.33             | 6.32          | 24.55             | 41.84             | 54.00    | -12.16 | AV                   |
| H                    | 23300.00  | 52.16            | 30.85             | 7.45          | 24.69             | 53.45             | 68.20    | -14.75 | PK                   |
| H                    | 23300.00  | 41.42            | 30.85             | 7.45          | 24.69             | 42.71             | 54.00    | -11.29 | AV                   |
| H                    | 29125.00  | 47.93            | 31.02             | 8.99          | 25.57             | 51.47             | 68.20    | -16.73 | PK                   |
| H                    | 29125.00  | 41.77            | 31.02             | 8.99          | 25.57             | 45.31             | 54.00    | -8.69  | AV                   |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5745MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 11490.00  | 51.07            | 30.55             | 5.77          | 24.66             | 50.95             | 74.00    | -23.05 | PK                   |
| V                   | 11490.00  | 43.50            | 30.55             | 5.77          | 24.66             | 43.38             | 54.00    | -10.62 | AV                   |
| V                   | 17235.00  | 52.47            | 30.33             | 6.32          | 24.55             | 53.01             | 68.20    | -15.19 | PK                   |
| V                   | 17235.00  | 42.79            | 30.33             | 6.32          | 24.55             | 43.33             | 54.00    | -10.67 | AV                   |
| V                   | 22980.00  | 49.78            | 30.85             | 7.45          | 24.69             | 51.07             | 74.00    | -22.93 | PK                   |
| V                   | 22980.00  | 42.36            | 30.85             | 7.45          | 24.69             | 43.65             | 54.00    | -10.35 | AV                   |
| V                   | 28725.00  | 53.39            | 31.02             | 8.99          | 25.57             | 56.93             | 68.20    | -11.27 | PK                   |
| V                   | 28725.00  | 42.77            | 31.02             | 8.99          | 25.57             | 46.31             | 54.00    | -7.69  | AV                   |
| H                   | 11490.00  | 51.65            | 30.55             | 5.77          | 24.66             | 51.53             | 74.00    | -22.47 | PK                   |
| H                   | 11490.00  | 42.58            | 30.55             | 5.77          | 24.66             | 42.46             | 54.00    | -11.54 | AV                   |
| H                   | 17235.00  | 53.77            | 30.33             | 6.32          | 24.55             | 54.31             | 68.20    | -13.89 | PK                   |
| H                   | 17235.00  | 43.15            | 30.33             | 6.32          | 24.55             | 43.69             | 54.00    | -10.31 | AV                   |
| H                   | 22980.00  | 51.54            | 30.85             | 7.45          | 24.69             | 52.83             | 74.00    | -21.17 | PK                   |
| H                   | 22980.00  | 43.26            | 30.85             | 7.45          | 24.69             | 44.55             | 54.00    | -9.45  | AV                   |
| H                   | 28725.00  | 51.91            | 31.02             | 8.99          | 25.57             | 55.45             | 68.20    | -12.75 | PK                   |
| H                   | 28725.00  | 43.48            | 31.02             | 8.99          | 25.57             | 47.02             | 54.00    | -6.98  | AV                   |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Middle Channel:5785MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                      | 11570.00  | 49.11            | 30.55             | 5.77          | 24.66             | 48.99             | 74.00    | -25.01 | PK                   |
| V                      | 11570.00  | 41.92            | 30.55             | 5.77          | 24.66             | 41.80             | 54.00    | -12.20 | AV                   |
| V                      | 17355.00  | 48.25            | 30.33             | 6.32          | 24.55             | 48.79             | 68.20    | -19.41 | PK                   |
| V                      | 17355.00  | 41.41            | 30.33             | 6.32          | 24.55             | 41.95             | 54.00    | -12.05 | AV                   |
| V                      | 23140.00  | 50.28            | 30.85             | 7.45          | 24.69             | 51.57             | 68.20    | -16.63 | PK                   |
| V                      | 23140.00  | 41.31            | 30.85             | 7.45          | 24.69             | 42.60             | 54.00    | -11.40 | AV                   |
| V                      | 28925.00  | 48.58            | 31.02             | 8.99          | 25.57             | 52.12             | 68.20    | -16.08 | PK                   |
| V                      | 28925.00  | 41.64            | 31.02             | 8.99          | 25.57             | 45.18             | 54.00    | -8.82  | AV                   |
| H                      | 11570.00  | 48.67            | 30.55             | 5.77          | 24.66             | 48.55             | 74.00    | -25.45 | PK                   |
| H                      | 11570.00  | 41.54            | 30.55             | 5.77          | 24.66             | 41.42             | 54.00    | -12.58 | AV                   |
| H                      | 17355.00  | 52.84            | 30.33             | 6.32          | 24.55             | 53.38             | 68.20    | -14.82 | PK                   |
| H                      | 17355.00  | 41.60            | 30.33             | 6.32          | 24.55             | 42.14             | 54.00    | -11.86 | AV                   |
| H                      | 23140.00  | 50.17            | 30.85             | 7.45          | 24.69             | 51.46             | 68.20    | -16.74 | PK                   |
| H                      | 23140.00  | 41.79            | 30.85             | 7.45          | 24.69             | 43.08             | 54.00    | -10.92 | AV                   |
| H                      | 28925.00  | 48.46            | 31.02             | 8.99          | 25.57             | 52.00             | 68.20    | -16.20 | PK                   |
| H                      | 28925.00  | 42.13            | 31.02             | 8.99          | 25.57             | 45.67             | 54.00    | -8.33  | AV                   |





| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| High Channel:5825MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                    | 11650.00  | 50.25            | 30.55             | 5.77          | 24.66             | 50.13             | 74.00    | -23.87 | PK                   |
| V                    | 11650.00  | 41.75            | 30.55             | 5.77          | 24.66             | 41.63             | 54.00    | -12.37 | AV                   |
| V                    | 17475.00  | 48.39            | 30.33             | 6.32          | 24.55             | 48.93             | 68.20    | -19.27 | PK                   |
| V                    | 17475.00  | 41.08            | 30.33             | 6.32          | 24.55             | 41.62             | 54.00    | -12.38 | AV                   |
| V                    | 23300.00  | 49.23            | 30.85             | 7.45          | 24.69             | 50.52             | 68.20    | -17.68 | PK                   |
| V                    | 23300.00  | 41.56            | 30.85             | 7.45          | 24.69             | 42.85             | 54.00    | -11.15 | AV                   |
| V                    | 29125.00  | 51.92            | 31.02             | 8.99          | 25.57             | 55.46             | 68.20    | -12.74 | PK                   |
| V                    | 29125.00  | 41.07            | 31.02             | 8.99          | 25.57             | 44.61             | 54.00    | -9.39  | AV                   |
| H                    | 11650.00  | 50.93            | 30.55             | 5.77          | 24.66             | 50.81             | 74.00    | -23.19 | PK                   |
| H                    | 11650.00  | 40.87            | 30.55             | 5.77          | 24.66             | 40.75             | 54.00    | -13.25 | AV                   |
| H                    | 17475.00  | 51.08            | 30.33             | 6.32          | 24.55             | 51.62             | 68.20    | -16.58 | PK                   |
| H                    | 17475.00  | 41.65            | 30.33             | 6.32          | 24.55             | 42.19             | 54.00    | -11.81 | AV                   |
| H                    | 23300.00  | 51.97            | 30.85             | 7.45          | 24.69             | 53.26             | 68.20    | -14.94 | PK                   |
| H                    | 23300.00  | 41.57            | 30.85             | 7.45          | 24.69             | 42.86             | 54.00    | -11.14 | AV                   |
| H                    | 29125.00  | 48.19            | 31.02             | 8.99          | 25.57             | 51.73             | 68.20    | -16.47 | PK                   |
| H                    | 29125.00  | 41.65            | 31.02             | 8.99          | 25.57             | 45.19             | 54.00    | -8.81  | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



## 5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

## 5.3 DEVIATION FROM STANDARD

No deviation.

## 5.4 TEST SETUP



## 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




## 5.6 TEST RESULTS

|               |          |                     |       |
|---------------|----------|---------------------|-------|
| Temperature : | 26 °C    | Relative Humidity : | 54%   |
| Pressure :    | 1015 hPa | Test Voltage :      | DC 9V |
| Test Band :   | 5.2G     |                     |       |


| Test mode                                  | Frequency (MHz) | PSD (dBm) | duty cycle Factor (dB) | Total PSD (dBm) | Limit (dBm) | Result |
|--------------------------------------------|-----------------|-----------|------------------------|-----------------|-------------|--------|
| 802.11a                                    | 5180            | -4.172    | 0                      | -4.172          | 11          | Pass   |
|                                            | 5200            | -4.124    | 0                      | -4.124          | 11          | Pass   |
|                                            | 5240            | -4.169    | 0                      | -4.169          | 11          | Pass   |
| 802.11n20                                  | 5180            | -4.518    | 0                      | -4.518          | 11          | Pass   |
|                                            | 5200            | -4.459    | 0                      | -4.459          | 11          | Pass   |
|                                            | 5240            | -4.695    | 0                      | -4.695          | 11          | Pass   |
| 802.11n40                                  | 5190            | -7.798    | 0                      | -7.798          | 11          | Pass   |
|                                            | 5230            | -8.734    | 0                      | -8.734          | 11          | Pass   |
| 802.11ac20                                 | 5180            | -4.439    | 0                      | -4.439          | 11          | Pass   |
|                                            | 5200            | -4.405    | 0                      | -4.405          | 11          | Pass   |
|                                            | 5240            | -4.427    | 0                      | -4.427          | 11          | Pass   |
| 802.11ac40                                 | 5190            | -8.511    | 0                      | -8.511          | 11          | Pass   |
|                                            | 5230            | -8.614    | 0                      | -8.614          | 11          | Pass   |
| 802.11ac80                                 | 5210            | -10.542   | 0                      | -10.542         | 11          | Pass   |
| Note: Total PSD = PSD + Duty Cycle Factor. |                 |           |                        |                 |             |        |




802.11a  
CH36

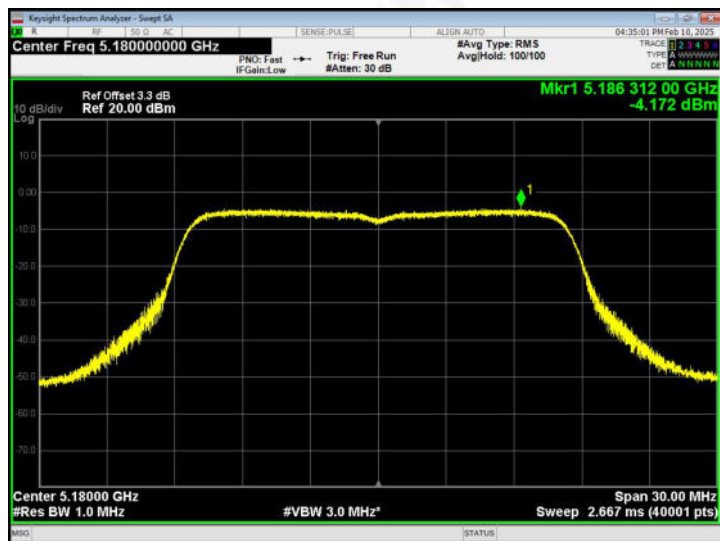

CH40

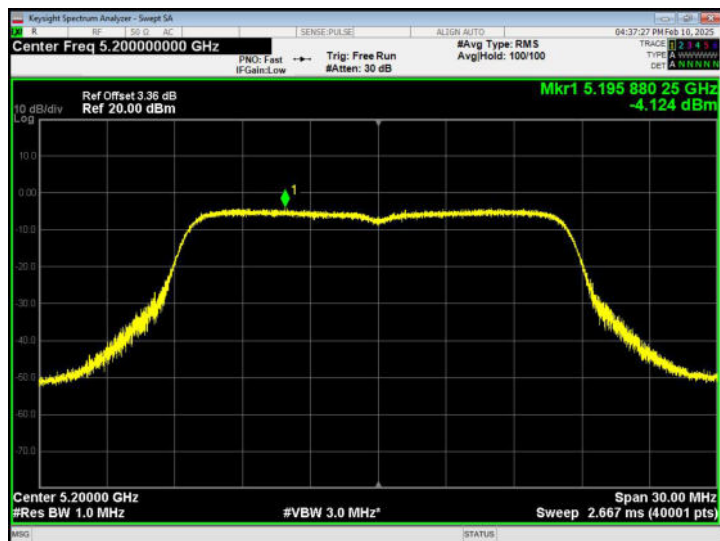


CH48

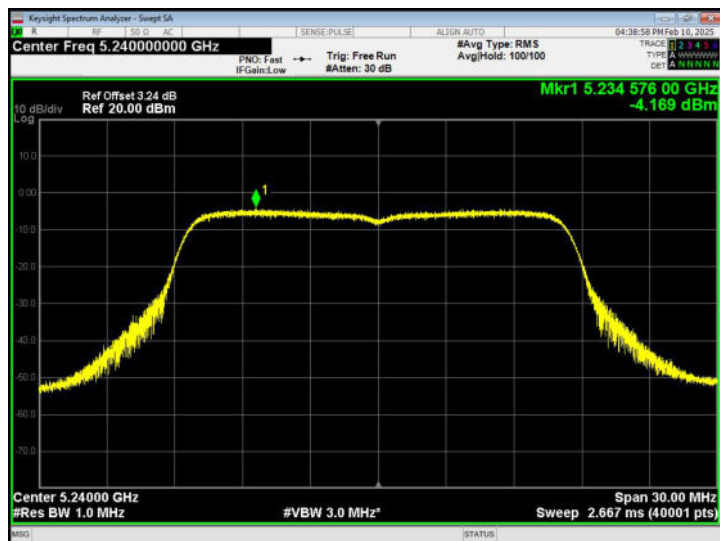







802.11n20  
CH36

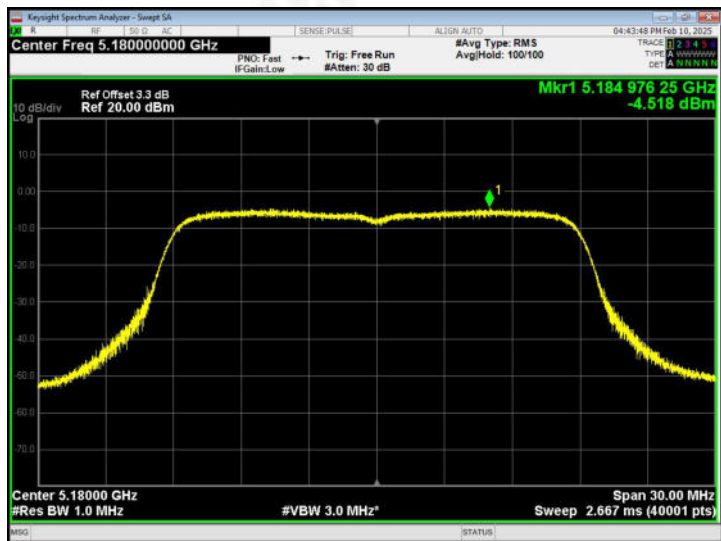


CH40

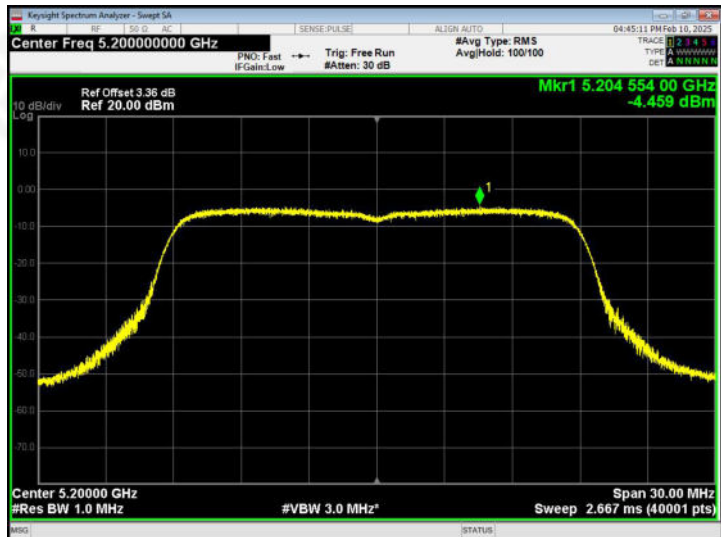


CH48

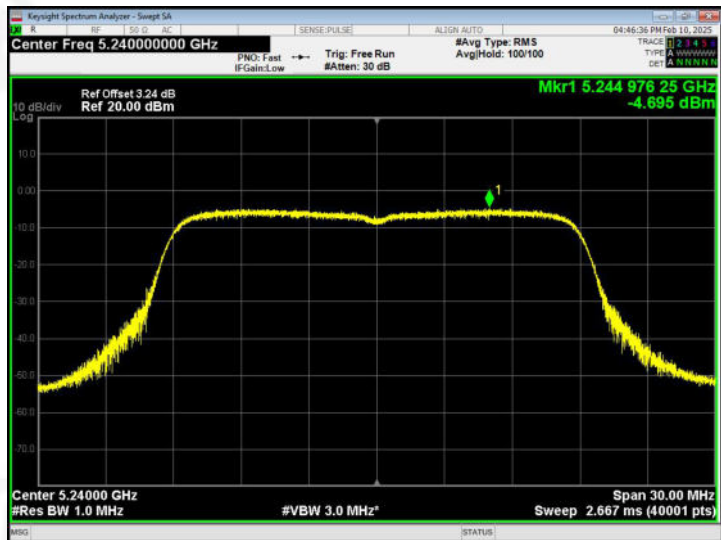

802.11n40  
CH38

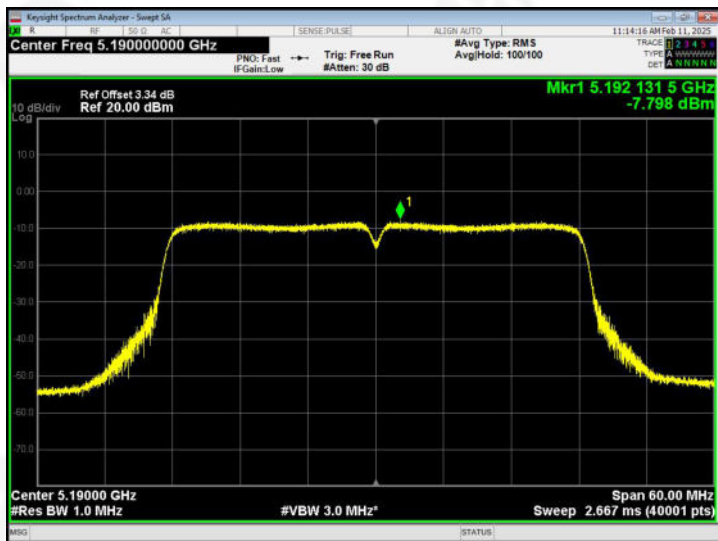


CH46

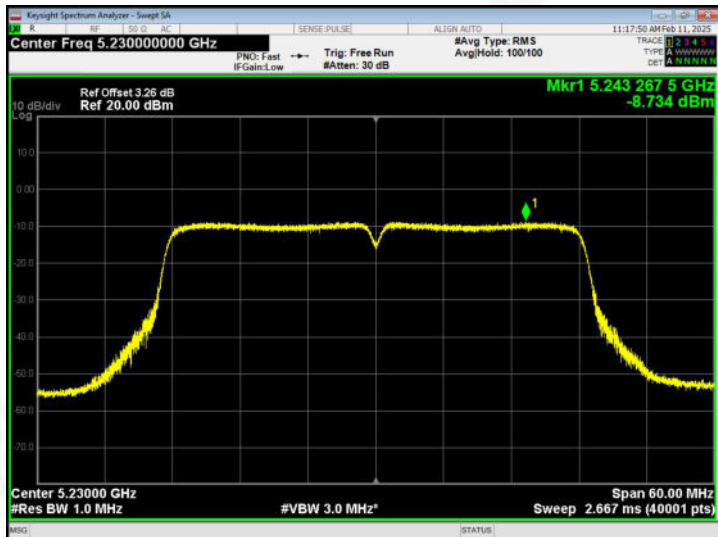





802.11ac20  
CH36

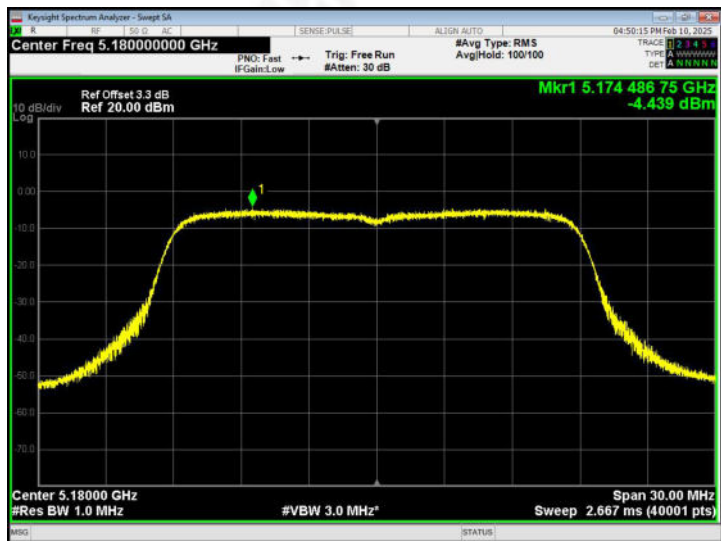


CH40

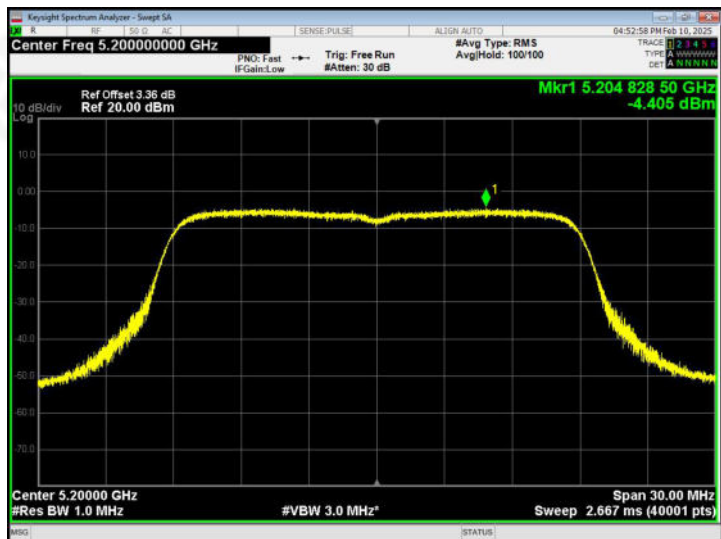


CH48

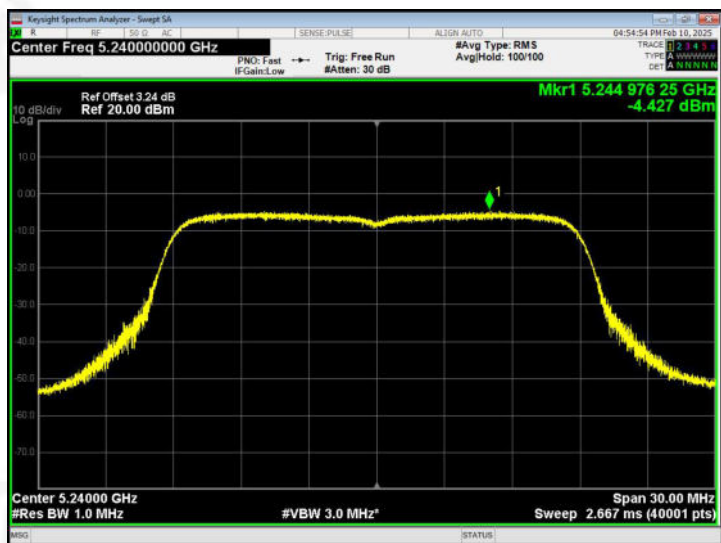


802.11ac40  
CH38

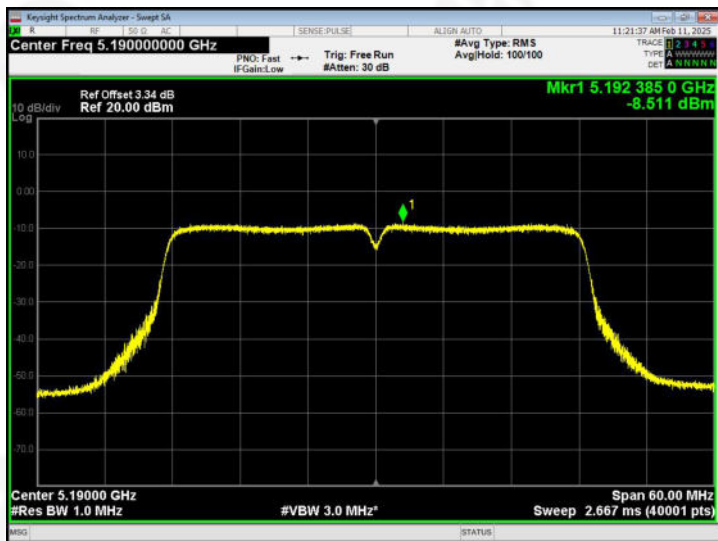

CH46

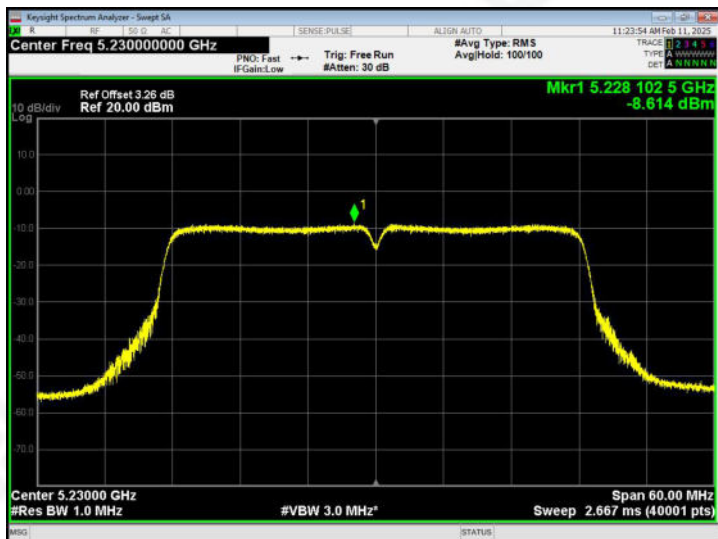

802.11ac80 - CH 42

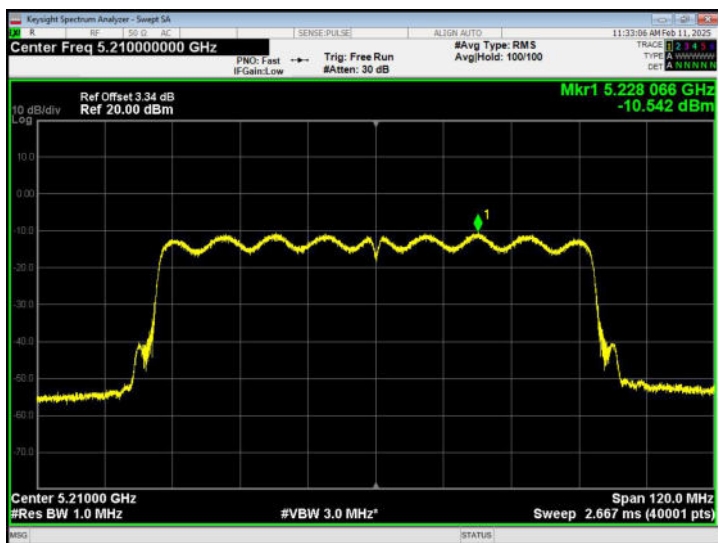



|               |          |                     |       |
|---------------|----------|---------------------|-------|
| Temperature : | 26 °C    | Relative Humidity : | 54%   |
| Pressure :    | 1015 hPa | Test Voltage :      | DC 9V |
| Test Band :   | 5.8G     |                     |       |


| Test mode                                  | Frequency (MHz) | PSD (dBm/500kHz) | duty cycle Factor (dB) | Total PSD (dBm) | Limit (dBm/500kHz) | Result |
|--------------------------------------------|-----------------|------------------|------------------------|-----------------|--------------------|--------|
| 802.11a                                    | 5745            | -7.069           | 0                      | -7.069          | 30                 | Pass   |
|                                            | 5785            | -7.838           | 0                      | -7.838          | 30                 | Pass   |
|                                            | 5825            | -6.206           | 0                      | -6.206          | 30                 | Pass   |
| 802.11n20                                  | 5745            | -7.581           | 0                      | -7.581          | 30                 | Pass   |
|                                            | 5785            | -8.027           | 0                      | -8.027          | 30                 | Pass   |
|                                            | 5825            | -6.631           | 0                      | -6.631          | 30                 | Pass   |
| 802.11n40                                  | 5755            | -10.972          | 0                      | -10.972         | 30                 | Pass   |
|                                            | 5795            | -11.304          | 0                      | -11.304         | 30                 | Pass   |
| 802.11ac20                                 | 5745            | -7.563           | 0                      | -7.563          | 30                 | Pass   |
|                                            | 5785            | -8.080           | 0                      | -8.080          | 30                 | Pass   |
|                                            | 5825            | -7.695           | 0                      | -7.695          | 30                 | Pass   |
| 802.11ac40                                 | 5755            | -10.834          | 0                      | -10.834         | 30                 | Pass   |
|                                            | 5795            | -11.374          | 0                      | -11.374         | 30                 | Pass   |
| 802.11ac80                                 | 5775            | -13.565          | 0                      | -13.565         | 30                 | Pass   |
| Note: Total PSD = PSD + Duty Cycle Factor. |                 |                  |                        |                 |                    |        |




802.11a  
CH149



CH157

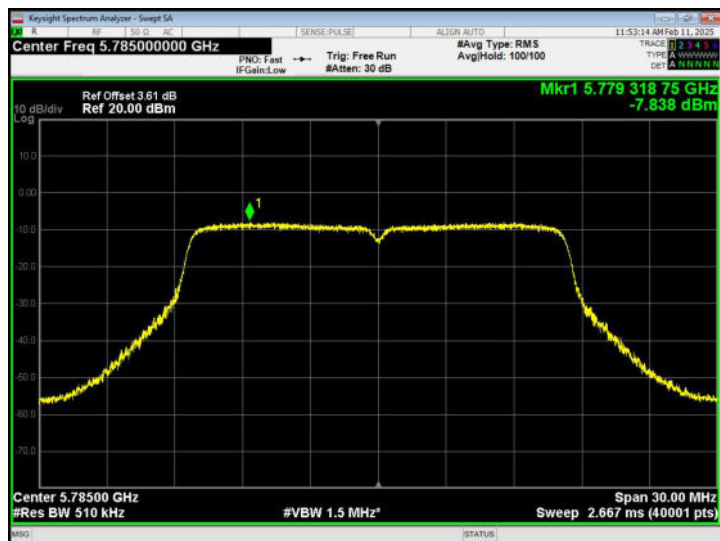

CH165

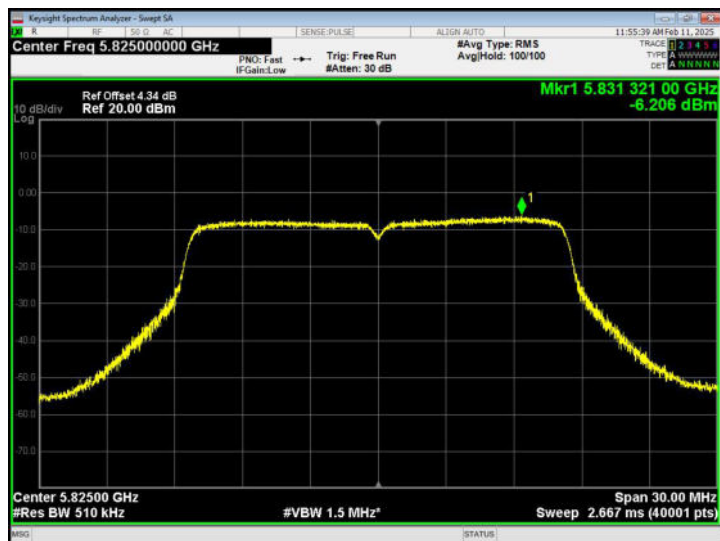





802.11n20  
CH149




802.11n40  
CH151

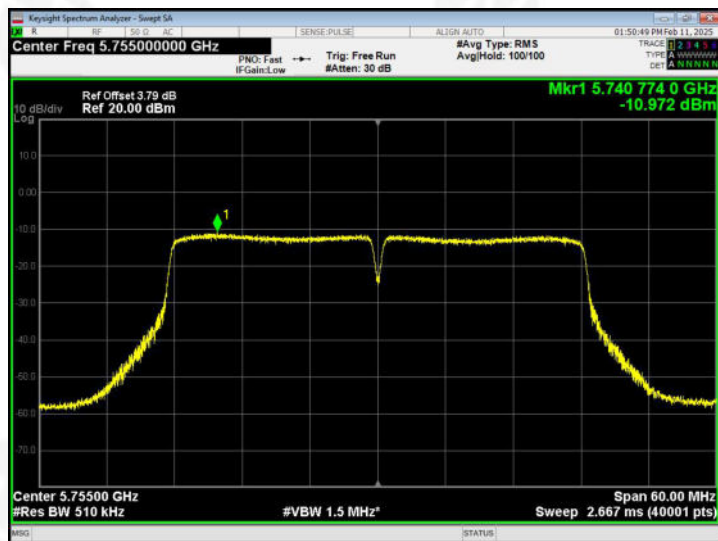

CH157

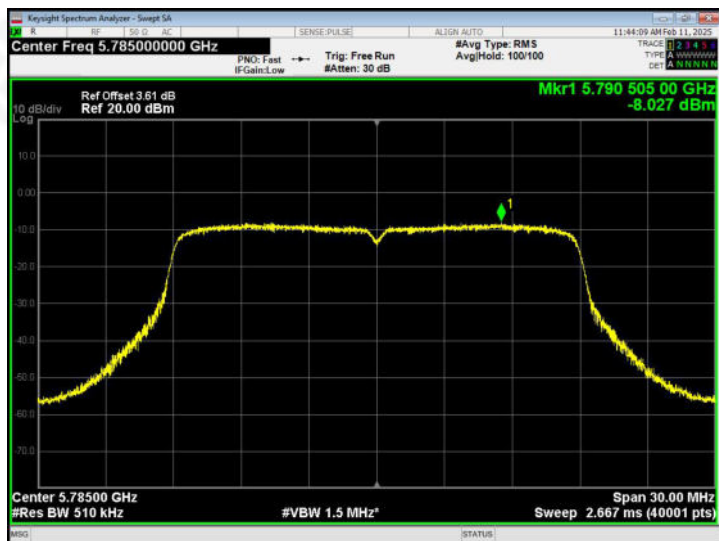

CH159

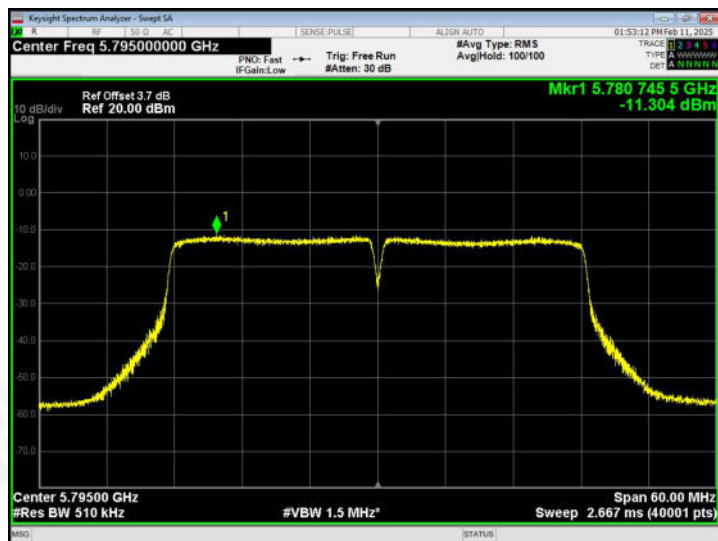


CH165








802.11ac20  
CH149

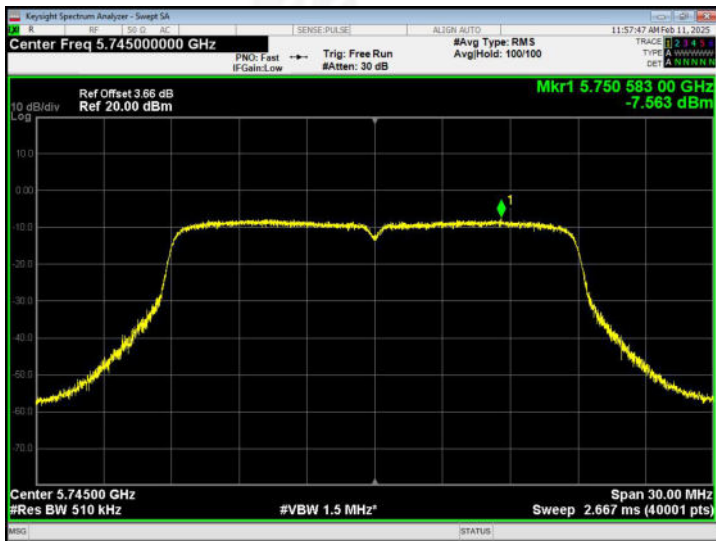


802.11ac40  
CH151




CH157

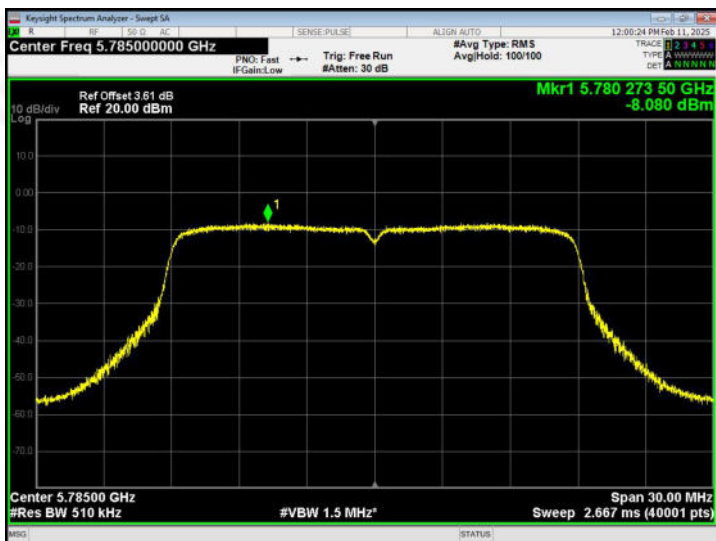


CH159

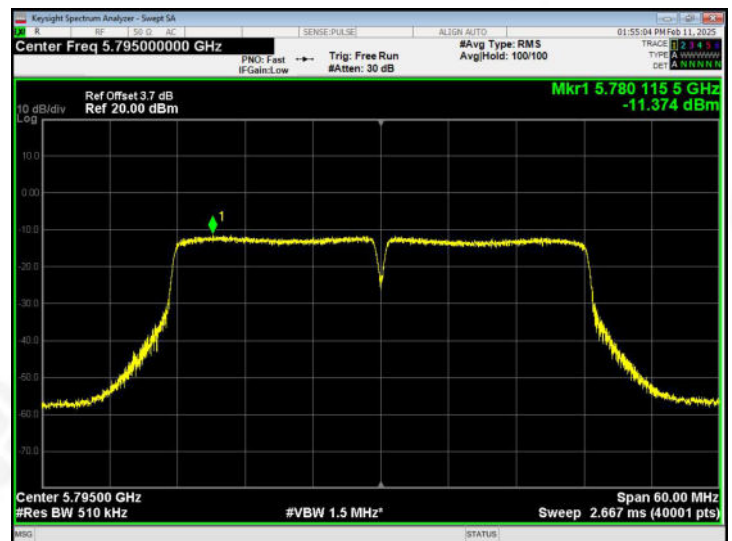

CH165

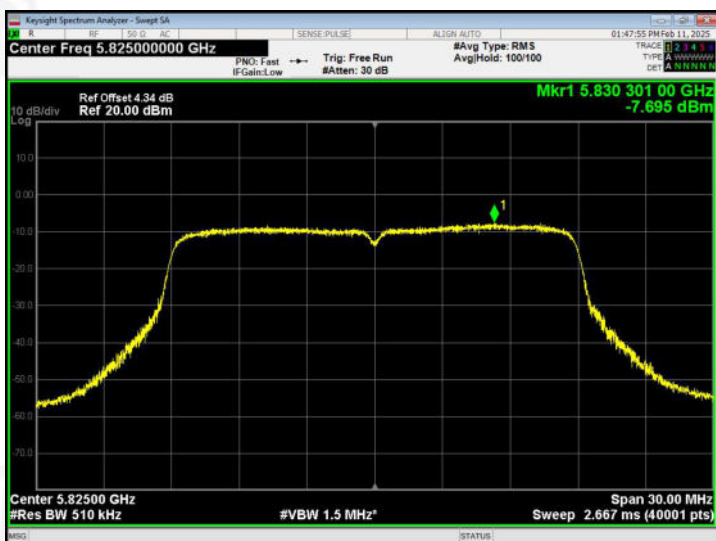

802.11ac80 - CH 155

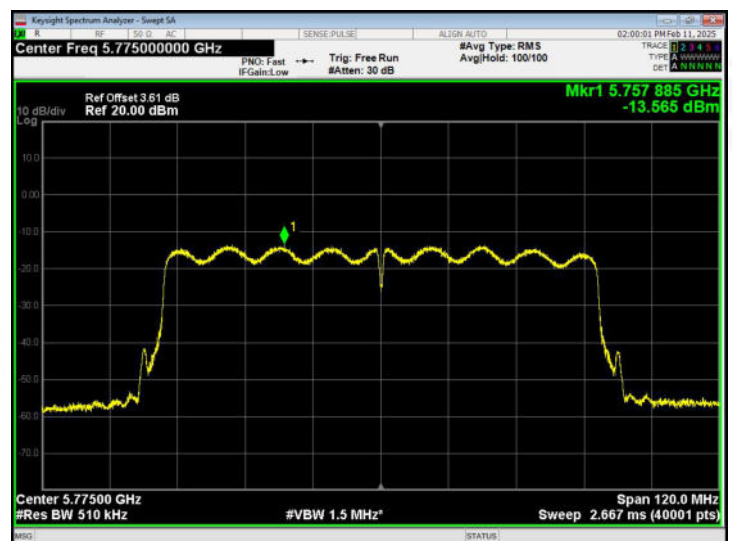



## 6. 26DB EMISSION BANDWIDTH & 6DB OCCUPIED BANDWIDTH

### 6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 6.2 TEST PROCEDURE

The following procedure shall be used for measuring 6dB Occupied Bandwidth:

The procedure for this method is as follows:

- Set RBW = 100KHz.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring 26dB Emission bandwidth:

The procedure for this method is as follows:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.



### 6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



#### 6.4 TEST RESULTS


|               |        |                     |       |
|---------------|--------|---------------------|-------|
| Temperature : | 26 °C  | Relative Humidity : | 54%   |
| Pressure :    | 101kPa | Test Voltage :      | DC 9V |
| Test Band :   | 5.2G   |                     |       |

| Test Mode  | Frequency (MHz) | 26dB Emission Bandwidth (MHz) | Limit (MHz) | Result |
|------------|-----------------|-------------------------------|-------------|--------|
| 802.11a    | 5180            | 19.89                         | N/A         | Pass   |
|            | 5200            | 19.90                         |             |        |
|            | 5240            | 19.84                         |             |        |
| 802.11n20  | 5180            | 20.37                         | N/A         | Pass   |
|            | 5200            | 20.63                         |             |        |
|            | 5240            | 20.77                         |             |        |
| 802.11n40  | 5190            | 42.71                         | N/A         | Pass   |
|            | 5230            | 42.20                         |             |        |
| 802.11ac20 | 5180            | 20.52                         | N/A         | Pass   |
|            | 5200            | 20.55                         |             |        |
|            | 5240            | 20.66                         |             |        |
| 802.11ac40 | 5190            | 42.70                         | N/A         | Pass   |
|            | 5230            | 42.46                         |             |        |
| 802.11ac80 | 5210            | 82.30                         | N/A         | Pass   |




802.11a


26dB Bandwidth plot on channel 36

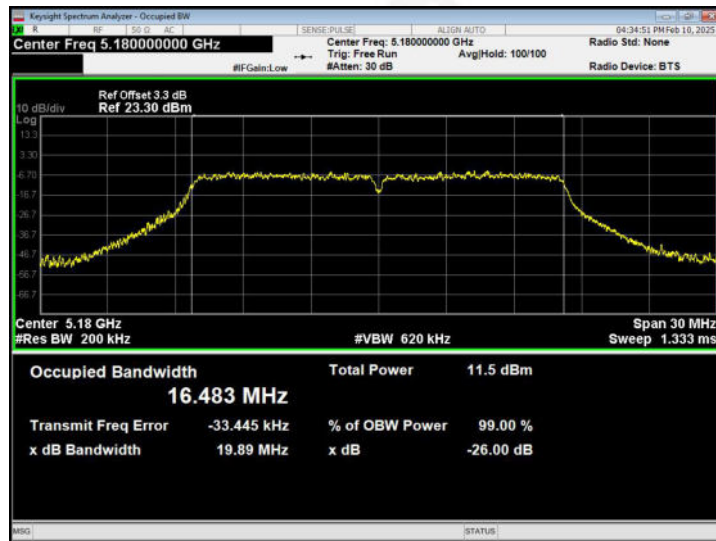

26dB Bandwidth plot on channel 40

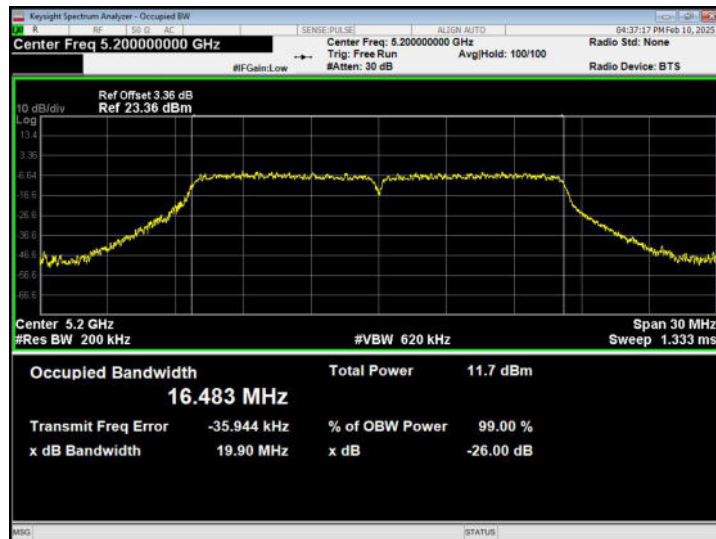


26dB Bandwidth plot on channel 48

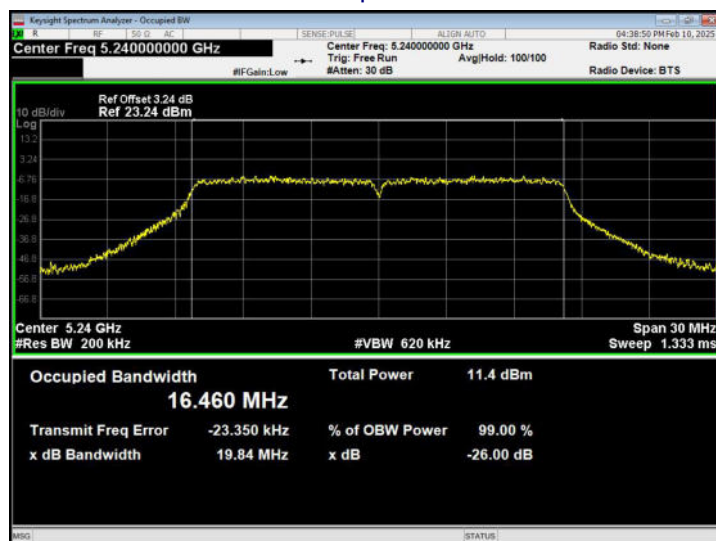




802.11n20

26dB Bandwidth plot on channel 36

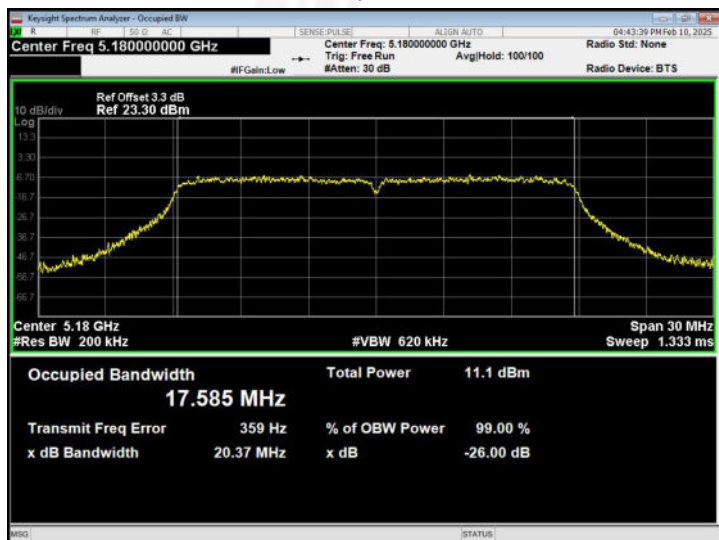


802.11n40


26dB Bandwidth plot on channel 38

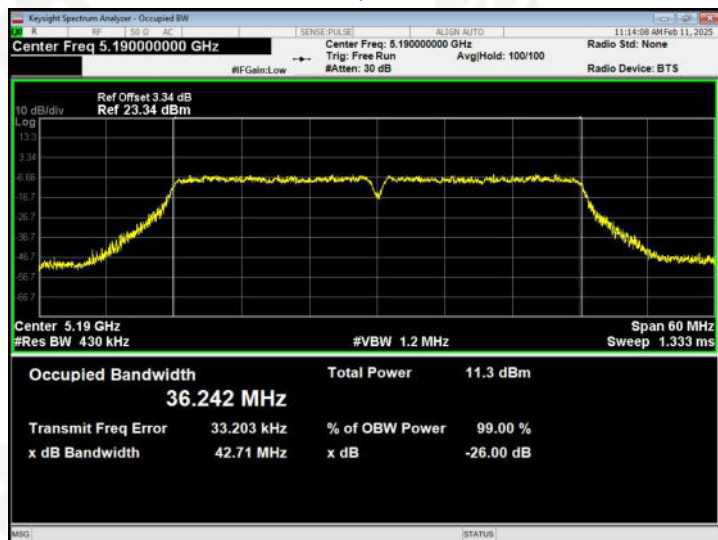


26dB Bandwidth plot on channel 40

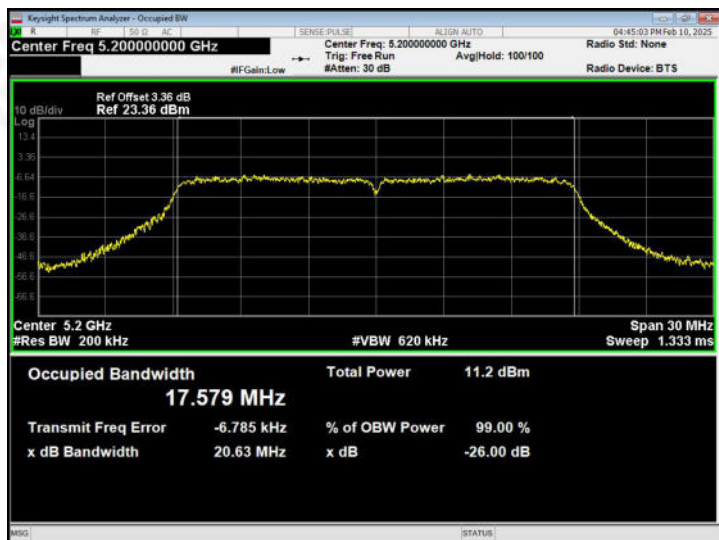

26dB Bandwidth plot on channel 46

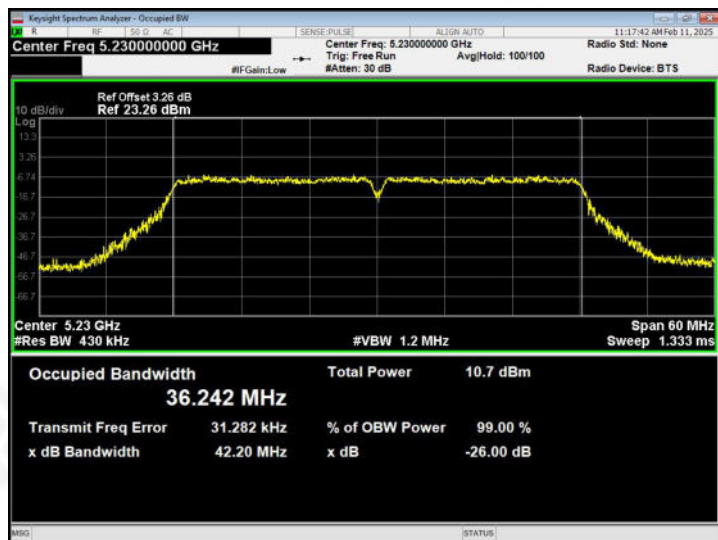

26dB Bandwidth plot on channel 48

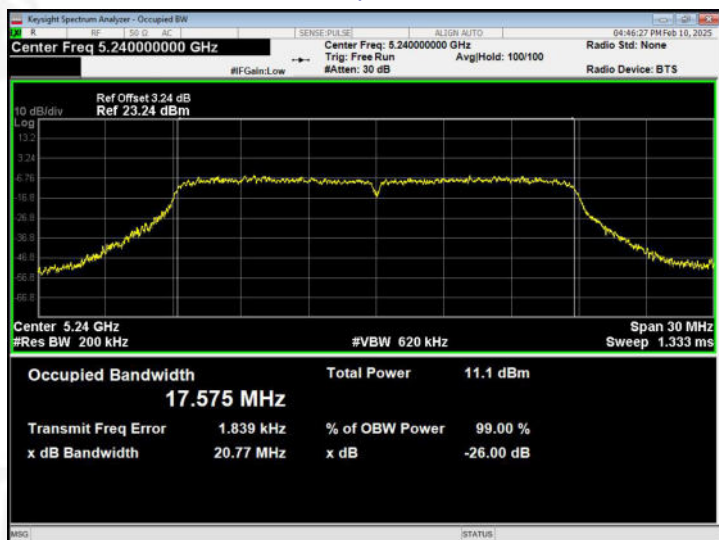







802.11ac20

26dB Bandwidth plot on channel 36

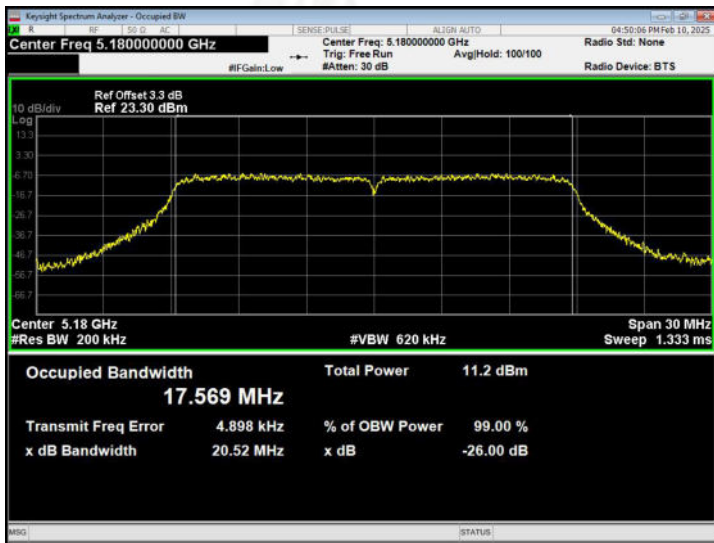


802.11ac40


26dB Bandwidth plot on channel 38

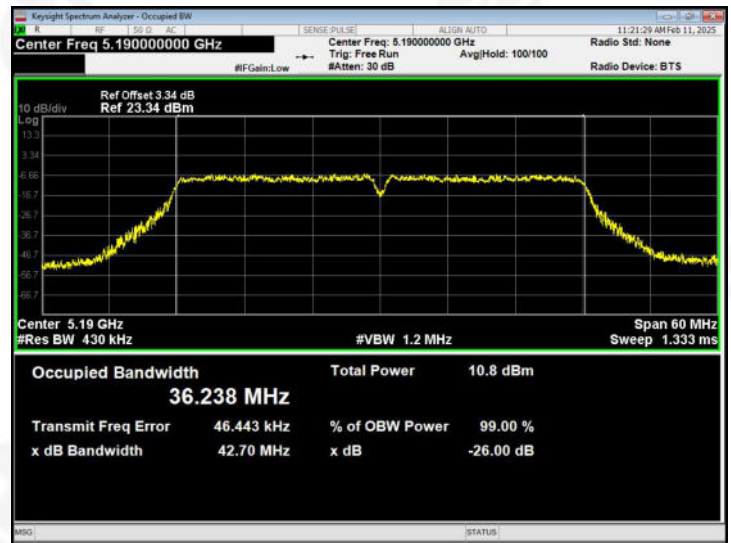


26dB Bandwidth plot on channel 40

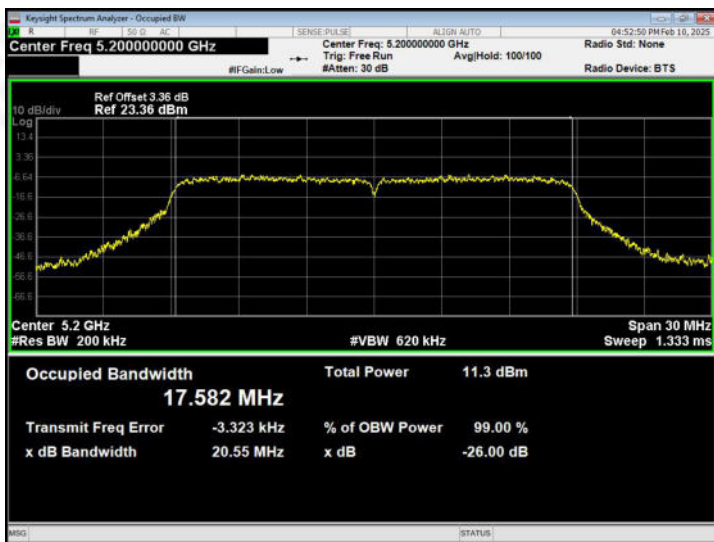


26dB Bandwidth plot on channel 46

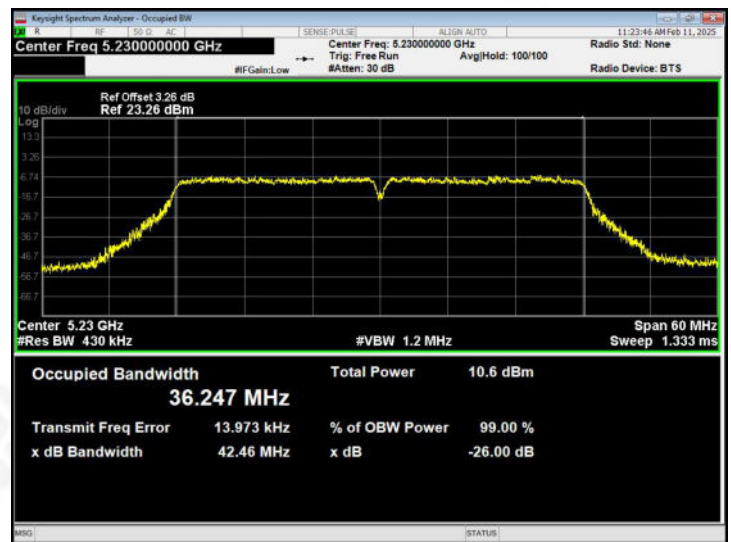

26dB Bandwidth plot on channel 48

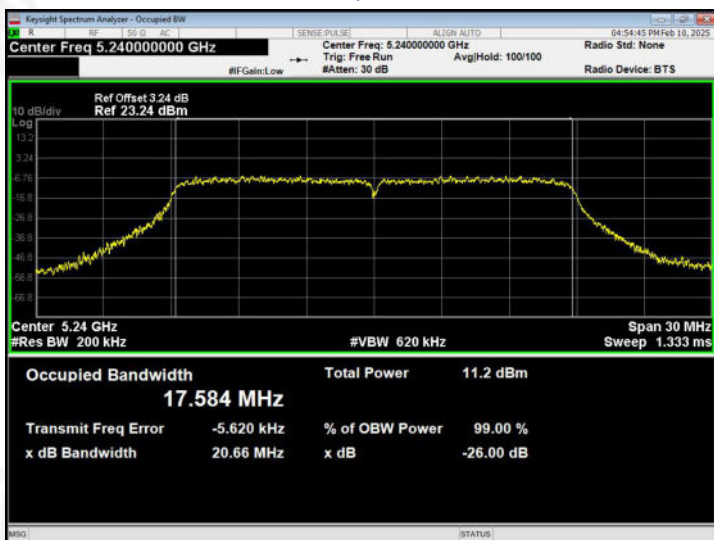

802.11ac80 - 26dB Bandwidth plot on channel 42

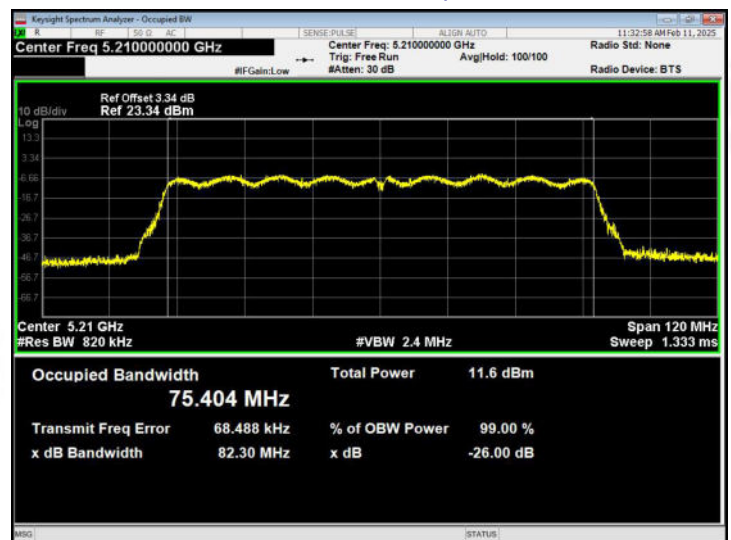




|               |        |                     |       |
|---------------|--------|---------------------|-------|
| Temperature : | 26 °C  | Relative Humidity : | 54%   |
| Pressure :    | 101kPa | Test Voltage :      | DC 9V |
| Test Band :   | 5.8G   |                     |       |

| Test Mode  | Frequency<br>(MHz) | 6dB<br>Bandwidth<br>(MHz) | 26dB<br>Bandwidth<br>(MHz) | 6dB Limit<br>(kHz) | Result |
|------------|--------------------|---------------------------|----------------------------|--------------------|--------|
| 802.11a    | 5745               | 16.45                     | 19.83                      | >500               | Pass   |
|            | 5785               | 16.45                     | 19.84                      |                    |        |
|            | 5825               | 16.49                     | 19.49                      |                    |        |
| 802.11n20  | 5745               | 17.60                     | 20.47                      | >500               | Pass   |
|            | 5785               | 17.61                     | 20.55                      |                    |        |
|            | 5825               | 17.60                     | 20.46                      |                    |        |
| 802.11n40  | 5755               | 36.45                     | 42.74                      | >500               | Pass   |
|            | 5795               | 36.47                     | 42.51                      |                    |        |
| 802.11ac20 | 5745               | 17.64                     | 20.47                      | >500               | Pass   |
|            | 5785               | 17.62                     | 20.40                      |                    |        |
|            | 5825               | 17.63                     | 20.54                      |                    |        |
| 802.11ac40 | 5755               | 36.46                     | 42.15                      | >500               | Pass   |
|            | 5795               | 36.43                     | 41.95                      |                    |        |
| 802.11ac80 | 5755               | 76.06                     | 81.98                      | >500               | Pass   |




802.11a

6dB Bandwidth plot on channel 149

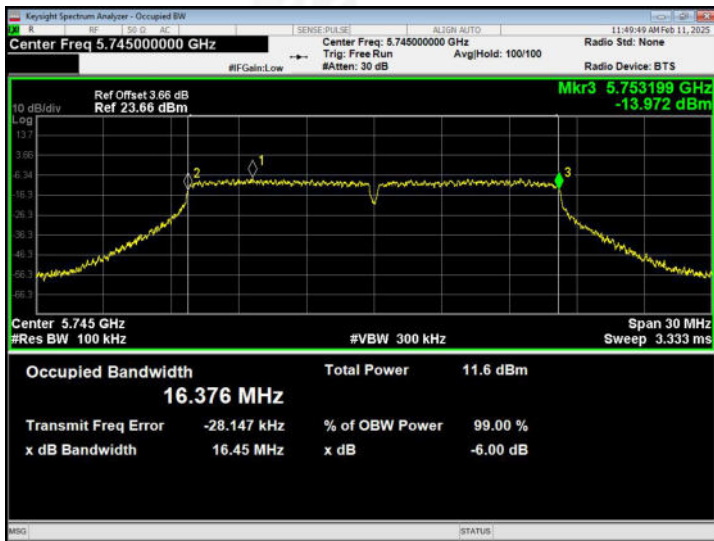


802.11a


26dB Bandwidth plot on channel 149

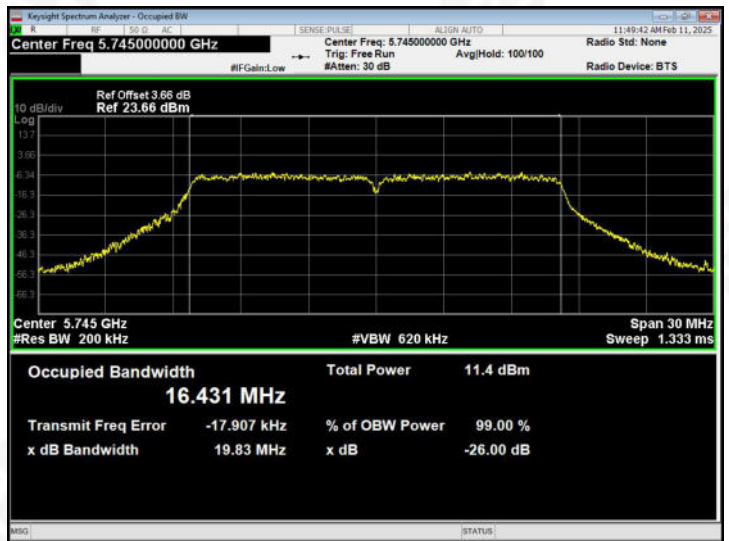


6dB Bandwidth plot on channel 157

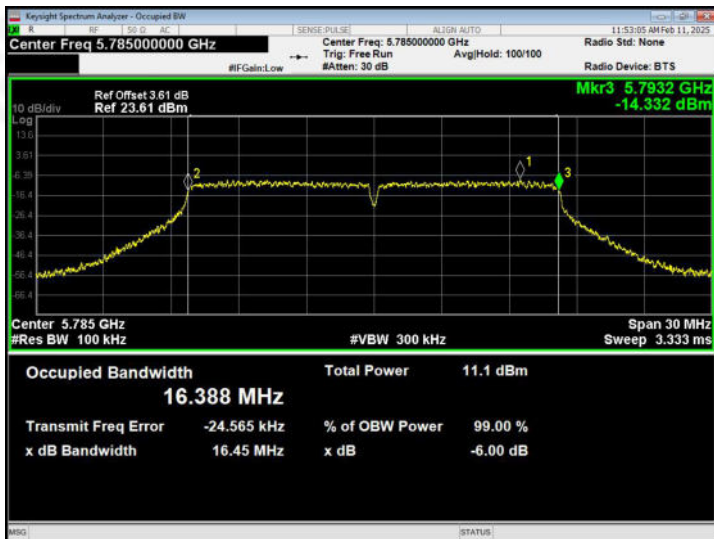


26dB Bandwidth plot on channel 157

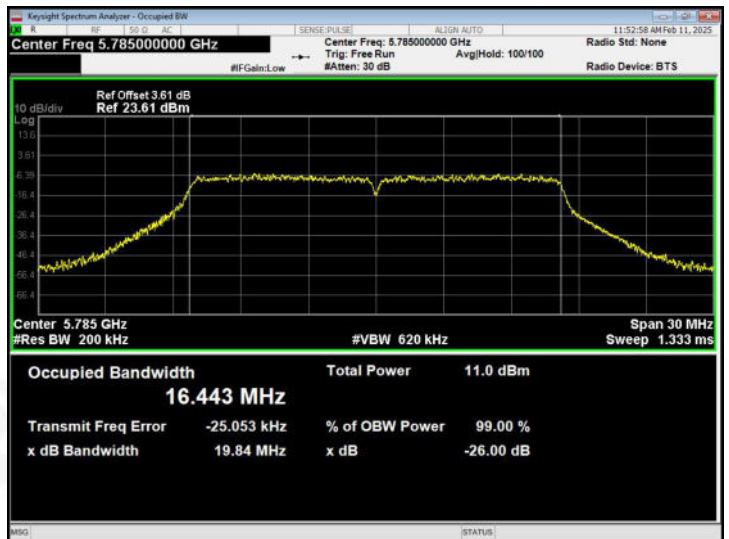

6dB Bandwidth plot on channel 165

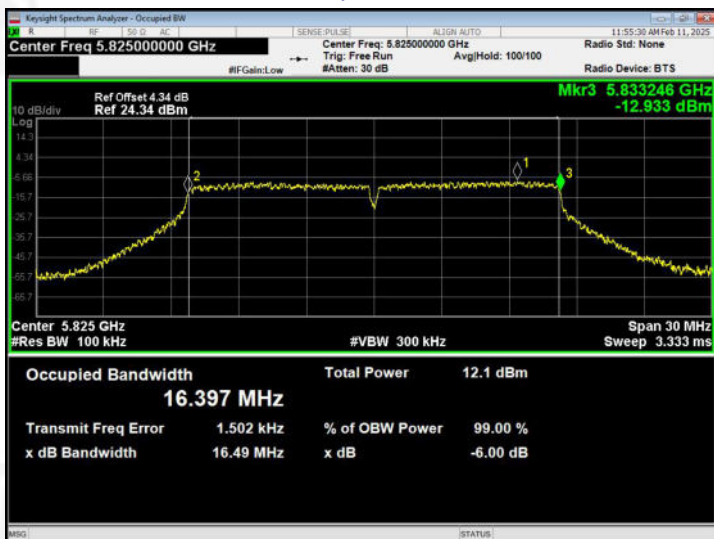


26dB Bandwidth plot on channel 165

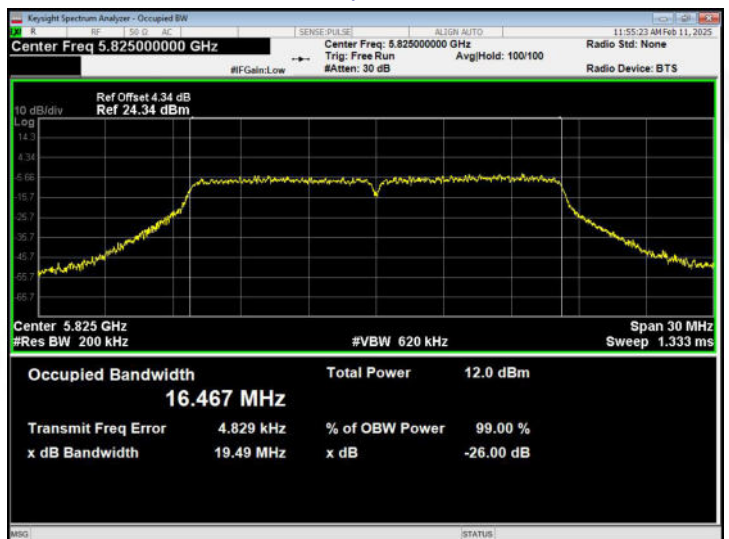




802.11n20

6dB Bandwidth plot on channel 149

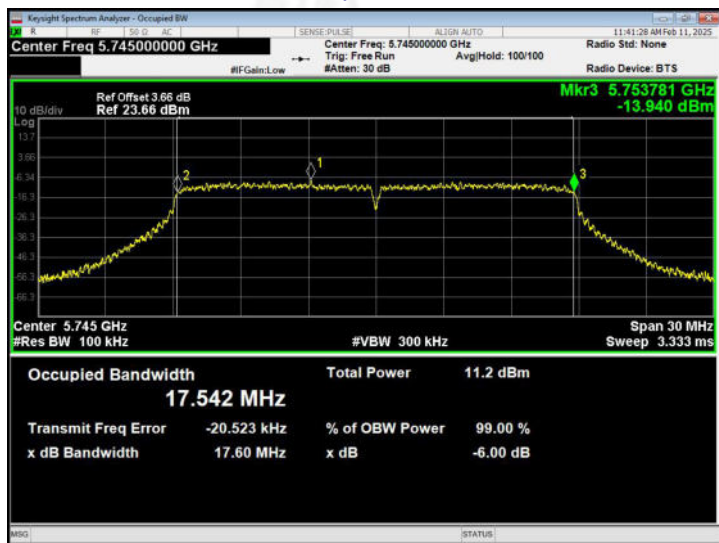


802.11n20


26dB Bandwidth plot on channel 149

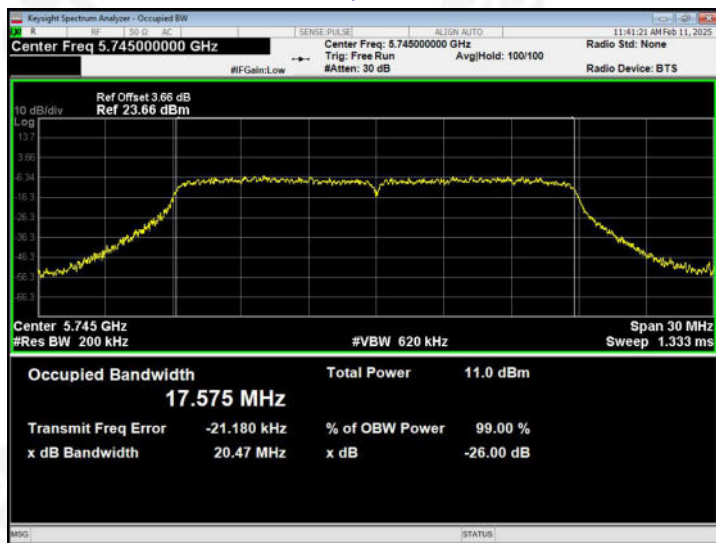

6dB Bandwidth plot on channel 157

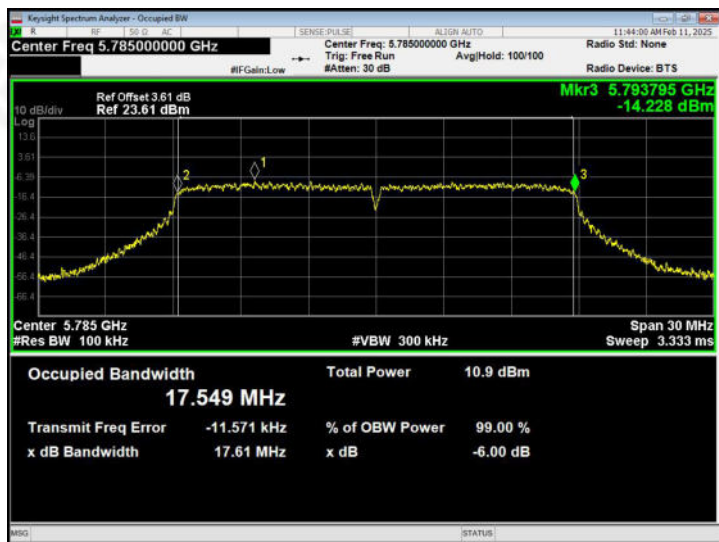


26dB Bandwidth plot on channel 157

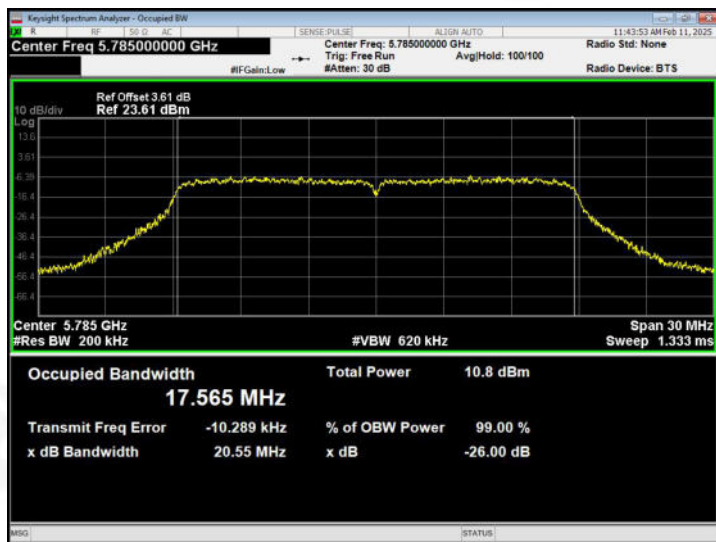

6dB Bandwidth plot on channel 165



26dB Bandwidth plot on channel 165

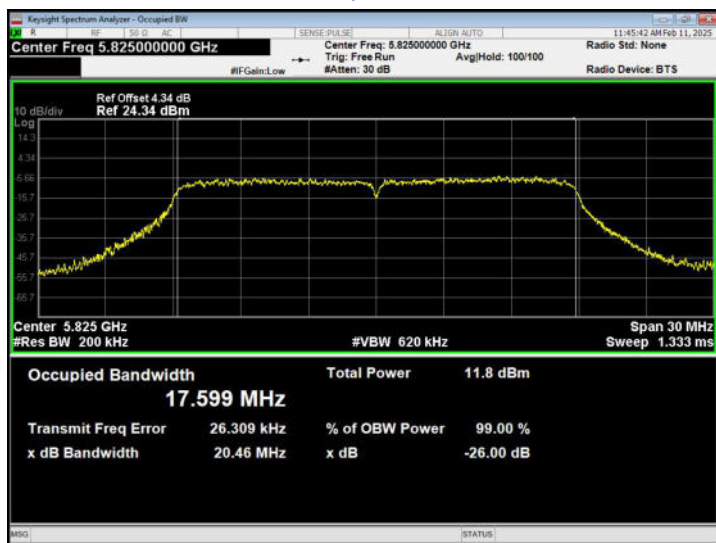







802.11n40

6dB Bandwidth plot on channel 151

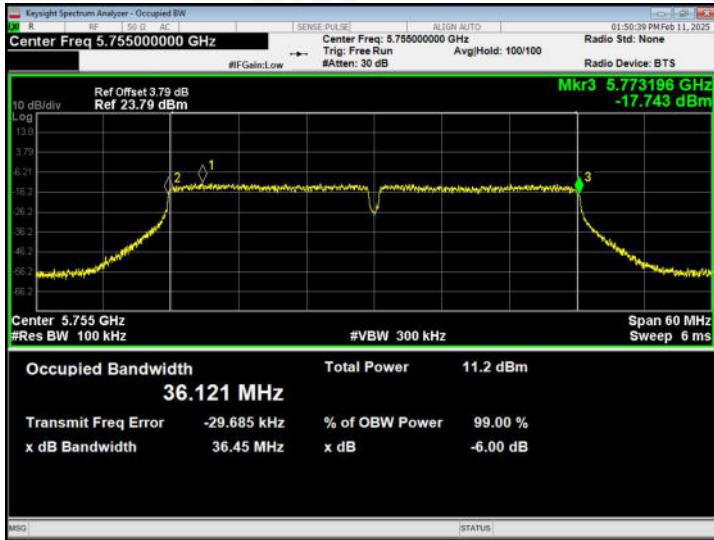


802.11n40


26dB Bandwidth plot on channel 151

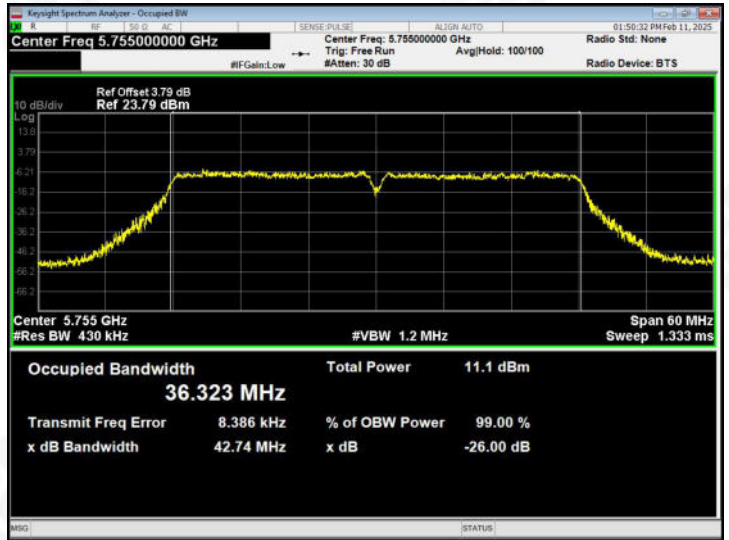

6dB Bandwidth plot on channel 159

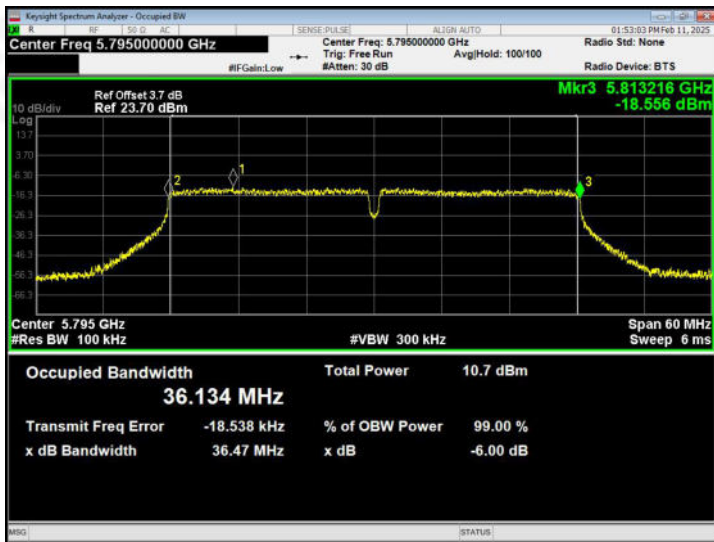

26dB Bandwidth plot on channel 159

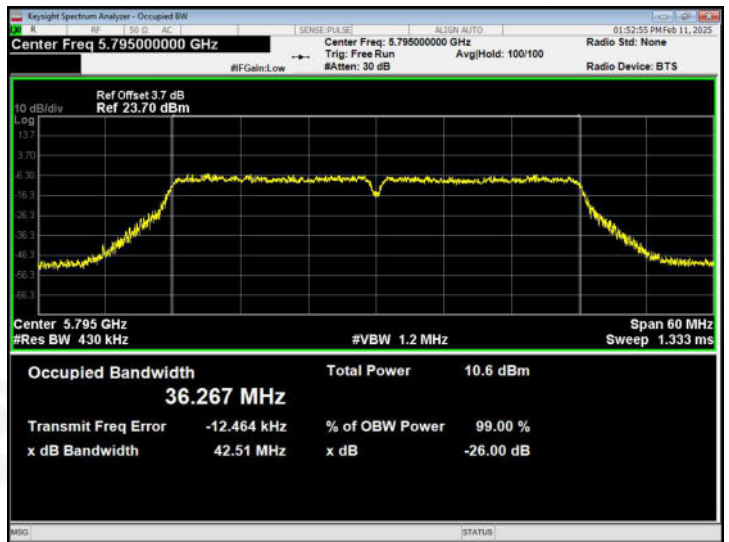







802.11ac20

6dB Bandwidth plot on channel 149

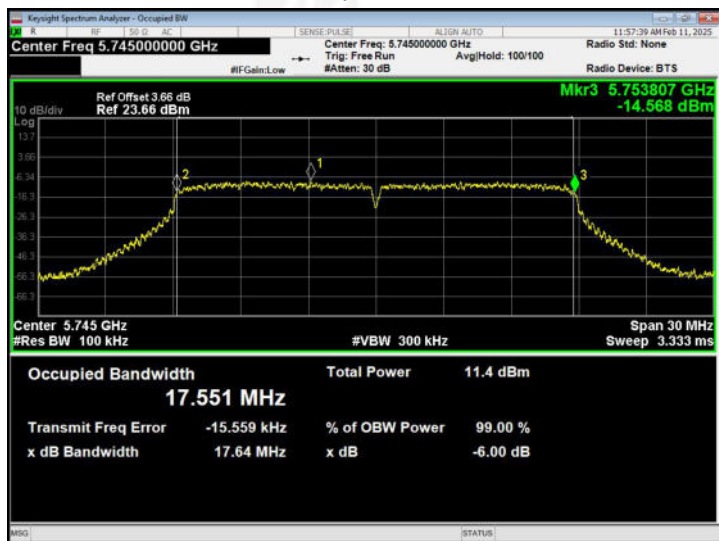


802.11ac20


26dB Bandwidth plot on channel 149

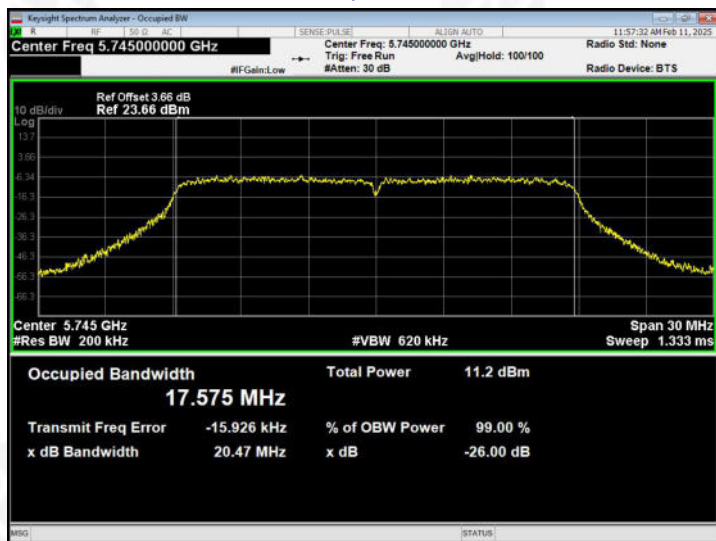


6dB Bandwidth plot on channel 157

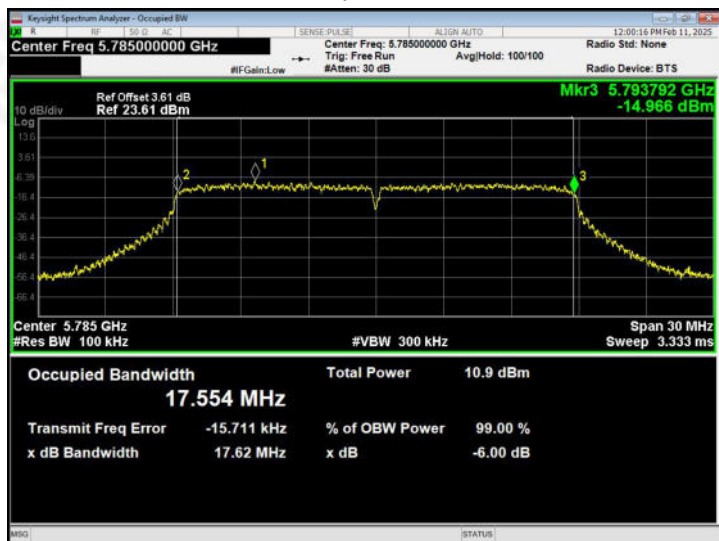


26dB Bandwidth plot on channel 157

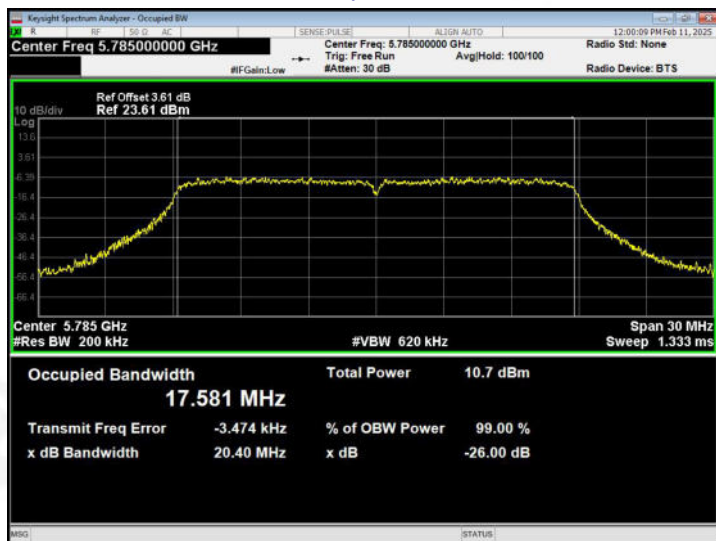

6dB Bandwidth plot on channel 165

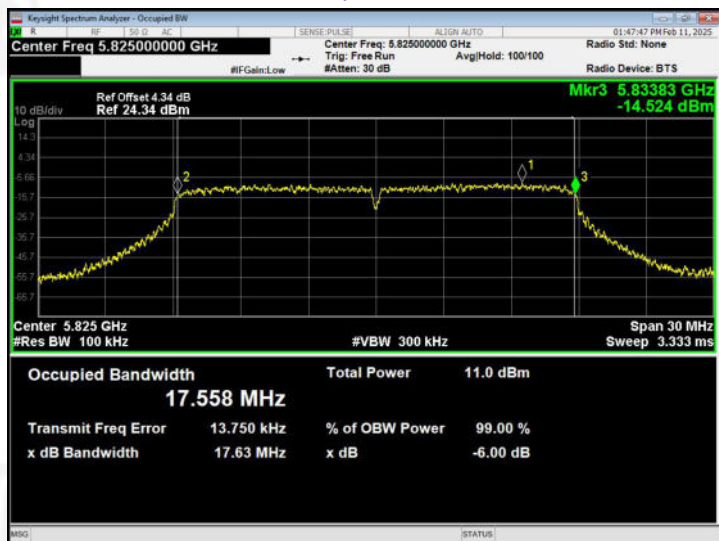


26dB Bandwidth plot on channel 165

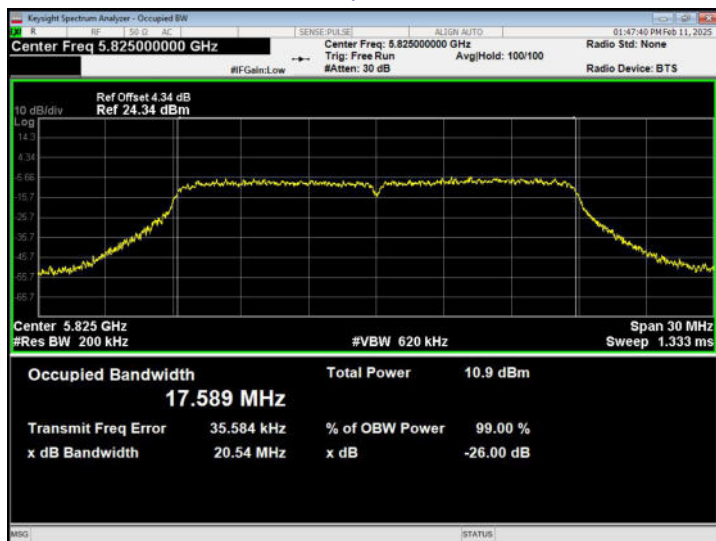




802.11ac40

6dB Bandwidth plot on channel 151

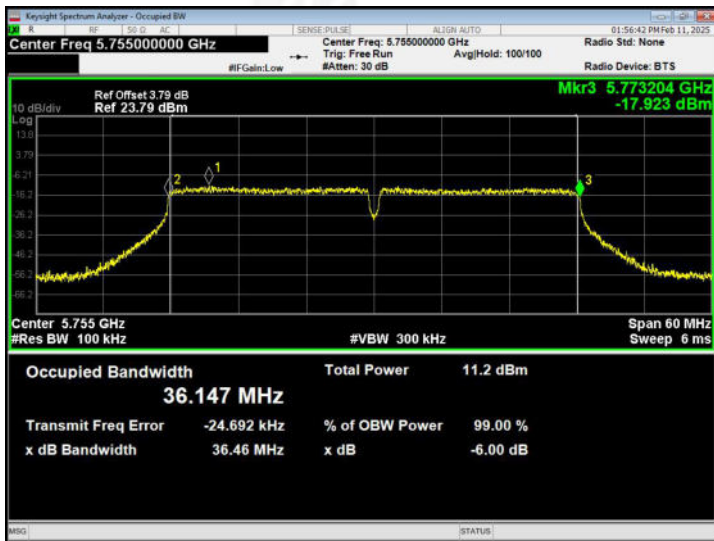


802.11ac40


26dB Bandwidth plot on channel 151

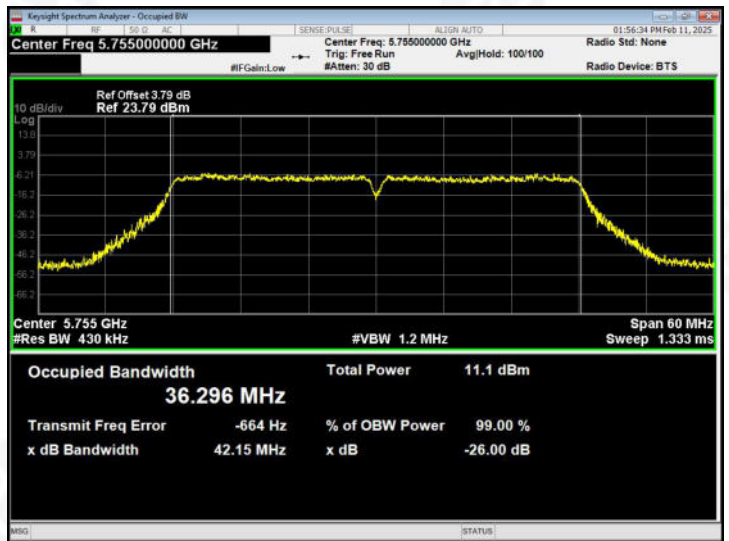

6dB Bandwidth plot on channel 159

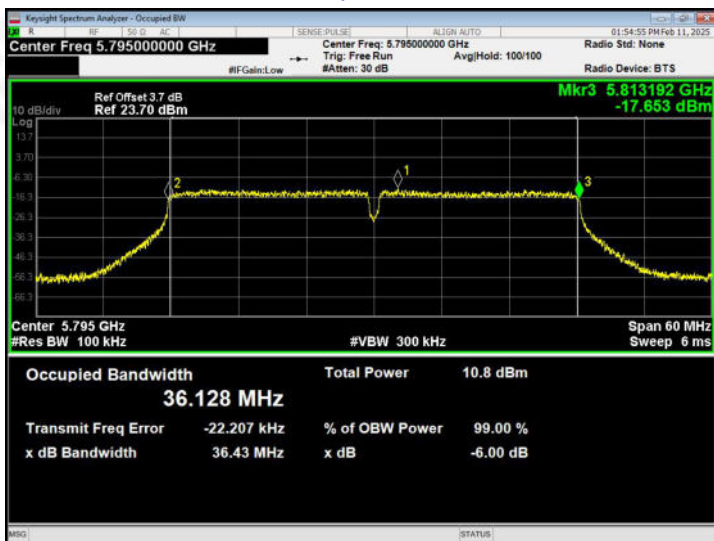


26dB Bandwidth plot on channel 159

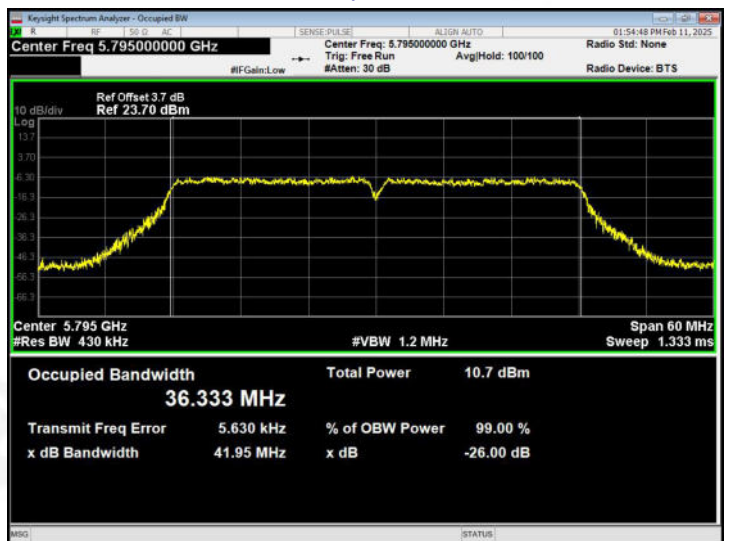


802.11ac80

6dB Bandwidth plot on channel 155

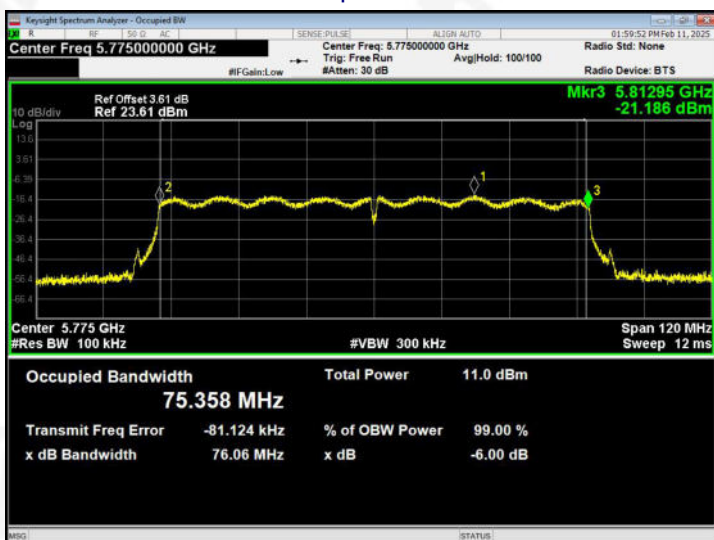

802.11ac80

26dB Bandwidth plot on channel 155

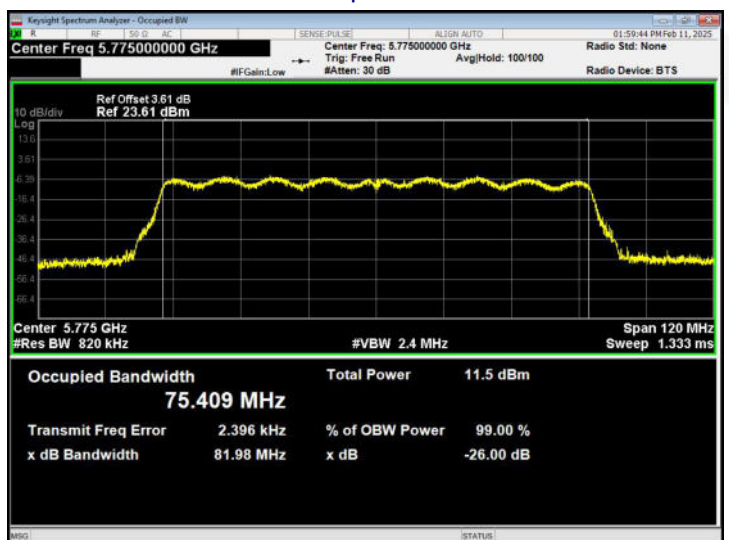



## 7. MAXIMUM CONDUCTED OUTPUT POWER

### 7.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

| Frequency Band(MHz) | Limit |
|---------------------|-------|
| 5150~5250           | 250mW |
| 5725~5850           | 1W    |

### 7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal. However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq 98$  percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq 3$  MHz.

(iv) Number of points in sweep  $\geq 2$  Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $< 98$  percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied



bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





## 7.6 TEST RESULTS

|               |          |                     |       |
|---------------|----------|---------------------|-------|
| Temperature : | 26 ℃     | Relative Humidity : | 54%   |
| Pressure :    | 1012 hPa | Test Voltage :      | DC 9V |
| Test Band :   | 5.2G     |                     |       |

| Test Mode   | Frequency (MHz) | Output power (dBm) | Duty cycle factor (dB) | Total power (dBm) | Limit (dBm) | Result |
|-------------|-----------------|--------------------|------------------------|-------------------|-------------|--------|
| 802.11 a    | 5180            | 6.152              | 0                      | 6.152             | 23.98       | Pass   |
|             | 5200            | 6.378              | 0                      | 6.378             | 23.98       | Pass   |
|             | 5240            | 6.182              | 0                      | 6.182             | 23.98       | Pass   |
| 802.11 n20  | 5180            | 5.971              | 0                      | 5.971             | 23.98       | Pass   |
|             | 5200            | 5.965              | 0                      | 5.965             | 23.98       | Pass   |
|             | 5240            | 5.907              | 0                      | 5.907             | 23.98       | Pass   |
| 802.11 n40  | 5190            | 5.796              | 0                      | 5.796             | 23.98       | Pass   |
|             | 5230            | 5.305              | 0                      | 5.305             | 23.98       | Pass   |
| 802.11 ac20 | 5180            | 5.944              | 0                      | 5.944             | 23.98       | Pass   |
|             | 5200            | 6.091              | 0                      | 6.091             | 23.98       | Pass   |
|             | 5240            | 5.973              | 0                      | 5.973             | 23.98       | Pass   |
| 802.11 ac40 | 5190            | 5.310              | 0                      | 5.310             | 23.98       | Pass   |
|             | 5230            | 5.195              | 0                      | 5.195             | 23.98       | Pass   |
| 802.11 ac80 | 5210            | 5.341              | 0                      | 5.341             | 23.98       | Pass   |

Note: Total power = Output power + Duty cycle factor.





|               |          |                     |       |
|---------------|----------|---------------------|-------|
| Temperature : | 26 °C    | Relative Humidity : | 54%   |
| Pressure :    | 1012 hPa | Test Voltage :      | DC 9V |
| Test Band :   | 5.8G     |                     |       |

| Test Mode   | Frequency (MHz) | Output power (dBm) | Duty cycle factor (dB) | Total power (dBm) | Limit (dBm) | Result |
|-------------|-----------------|--------------------|------------------------|-------------------|-------------|--------|
| 802.11 a    | 5745            | 6.027              | 0                      | 6.027             | 30          | Pass   |
|             | 5785            | 5.657              | 0                      | 5.657             | 30          | Pass   |
|             | 5825            | 6.737              | 0                      | 6.737             | 30          | Pass   |
| 802.11 n20  | 5745            | 5.781              | 0                      | 5.781             | 30          | Pass   |
|             | 5785            | 5.571              | 0                      | 5.571             | 30          | Pass   |
|             | 5825            | 6.615              | 0                      | 6.615             | 30          | Pass   |
| 802.11 n40  | 5755            | 5.690              | 0                      | 5.690             | 30          | Pass   |
|             | 5795            | 5.241              | 0                      | 5.241             | 30          | Pass   |
| 802.11 ac20 | 5745            | 5.957              | 0                      | 5.957             | 30          | Pass   |
|             | 5785            | 5.487              | 0                      | 5.487             | 30          | Pass   |
|             | 5825            | 5.590              | 0                      | 5.590             | 30          | Pass   |
| 802.11 ac40 | 5755            | 5.690              | 0                      | 5.690             | 30          | Pass   |
|             | 5795            | 5.275              | 0                      | 5.275             | 30          | Pass   |
| 802.11 ac80 | 5775            | 5.302              | 0                      | 5.302             | 30          | Pass   |

Note: Total power = Output power + Duty cycle factor.



## 8. OUT OF BAND EMISSIONS

### 8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2)

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




## 8.6 TEST RESULTS


|               |          |                     |         |
|---------------|----------|---------------------|---------|
| Temperature : | 26 °C    | Relative Humidity : | 54%     |
| Pressure :    | 1012 hPa | Test Voltage :      | DC 9V   |
| Test band :   | 5.2G     | Antenna gain :      | 1.81dBi |

### 5.180~5.240 GHz


(802.11a) Band Edge, Left Side

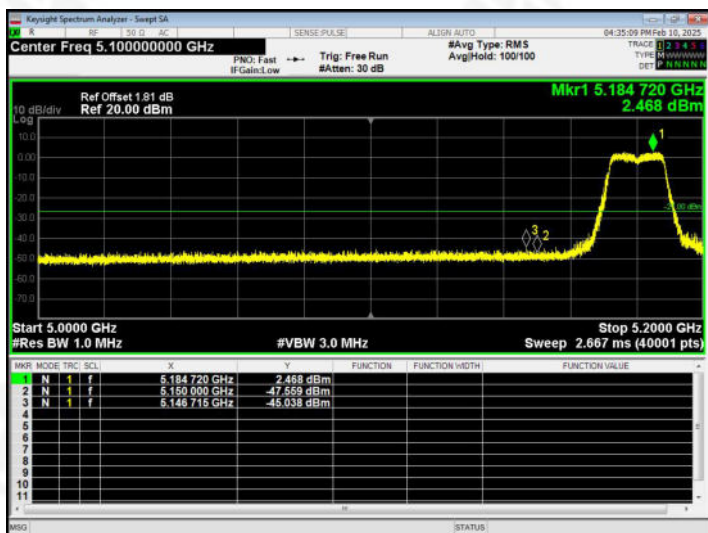

(802.11a) Band Edge, Right Side

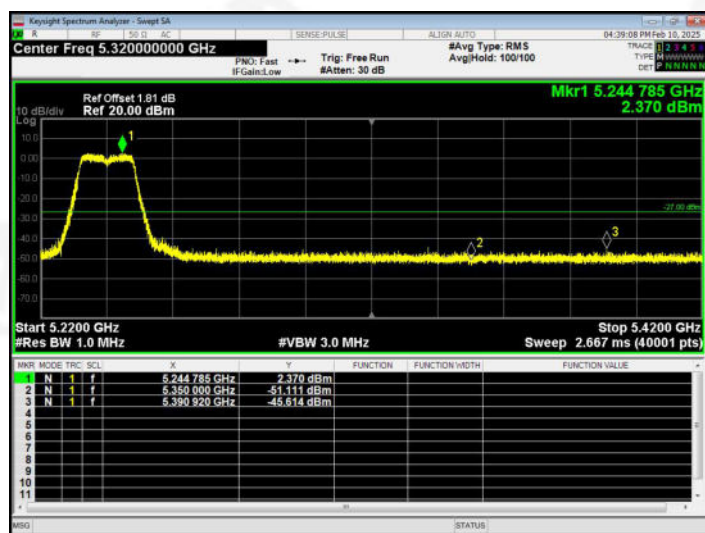

(802.11n20) Band Edge, Left Side

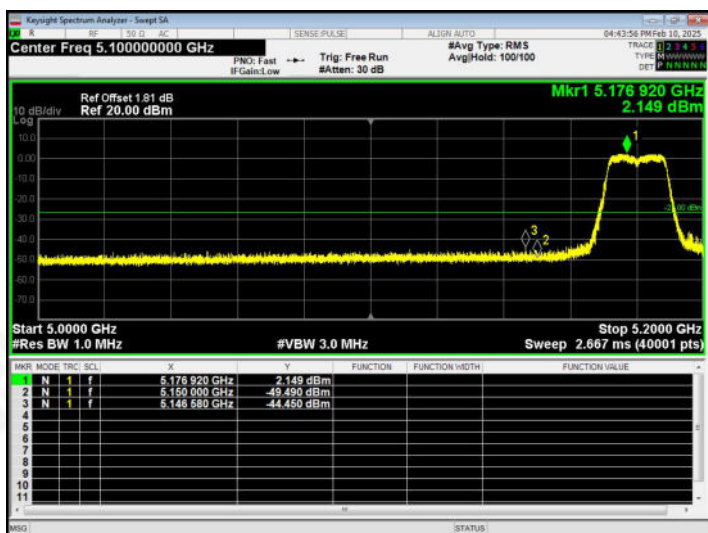

(802.11n20) Band Edge, Right Side

