

# Testing Report

Customer Name: Dongguan Jizhi Electronic Technology Co., Ltd.


Product Name: Inverted F Antenna (IFA) on PCB

Sample Model: JZANT-223

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2022.12.19

Engineer: Jackson	Date: 2022.12.19
Auditor: Eason	Date: 2022.12.19
Approver: Janson	Date: 2022.12.19



### Version

Version No.	Date	Description	Formulate	Approval
A0	2022.12.19	For the first time, formulate	Jackson	Eason

### Contents

1.General Information ..... 3

    1.1 General information of testing institutions ..... 3

    1.2 Testing principle ..... 3

    1.3 Test equipment ..... 4

    1.4 Test environment ..... 4

    1.5 Statement ..... 4

2.Sample Information ..... 5

    2.1 Client information ..... 5

    2.2 Description of EUT(S) ..... 5

    2.3 EUT appearance ..... 6

    2.4 EUT setup photo of free space OTA testing ..... 7

3.Test Results ..... 8

    3.1 Test standard ..... 8

    3.2 Test uncertainty ..... 8

    3.3 Test data ..... 9

        3.3.1 Typical free space efficiency and gain ..... 9

        3.3.2 Typical free space radiation pattern ..... 9

    (The following is blank) ..... 10

# 1. General Information


## 1.1 General information of testing institutions

<b>Name</b>	Shenzhen RFI-LAB Communication Technology Co., Ltd.
<b>Address</b>	10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ
<b>Tel</b>	13682621346
<b>E-mail</b>	rfi-lab@tech-now.com
<b>Equipment</b>	All the equipment used in the report is fixed in 10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ

## 1.2 Testing principle



# Multi-Probe OTA Measurement System

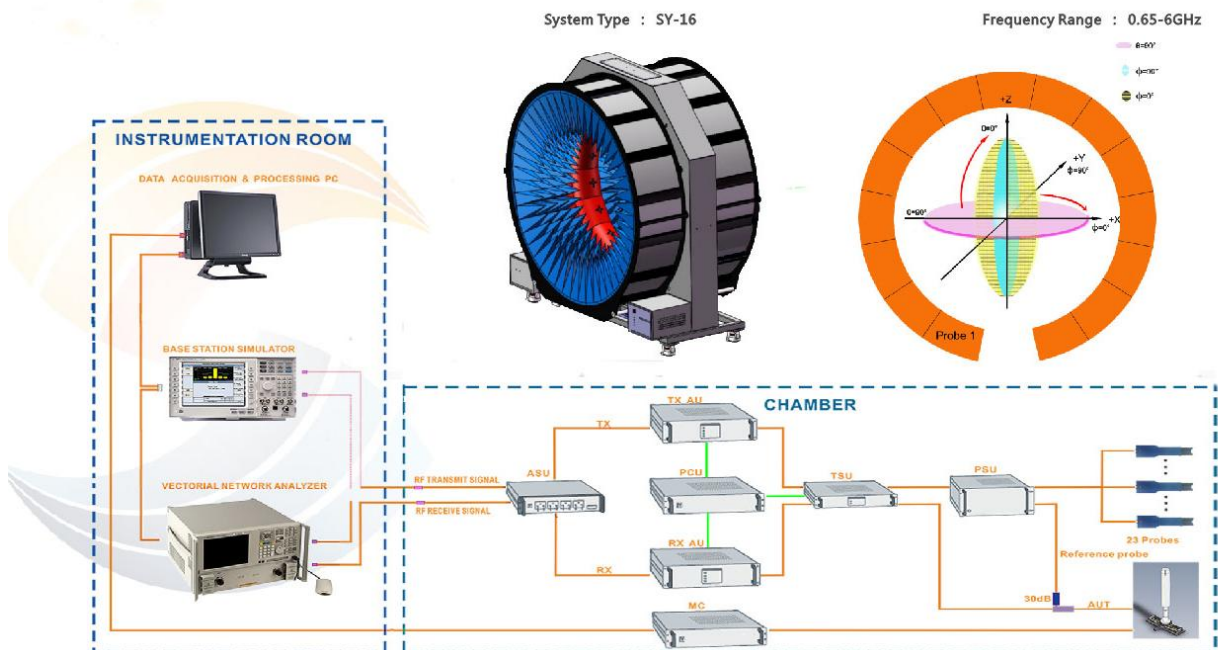

### 1.3 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
16 probe microwave chamber	3*3*2.5	RFI-LAB-RF-A00	SUNYIELD	2021.3.15	2023.3.14
Network Analyzer	E5071C	RFI-LAB-RF-A02	Agilent	2022.5.13	2023.5.12

### 1.4 Test environment

Temperature	23.8°C
Humidity	59%RH
Pressure	100.23kPa

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2. Sample Information



### 2.1 Client information

<b>Name</b>	Dongguan Jizhi Electronic Technology Co., Ltd.
<b>Address</b>	West Side of 5/F, Building H, Fasite Industry Park, No. 89, Liyatang Industry Zone, Lincun Community, Tangxia Town, Dongguan, Guangdong, China
<b>Contacts</b>	NaturalZhou
<b>Tel</b>	/
<b>E-mail</b>	zhouziran@jikedingzhi.com

### 2.2 Description of EUT(S)

<b>Product Name</b>	Inverted F Antenna (IFA) on PCB
<b>Sample Model</b>	JZANT-223
<b>Size</b>	/
<b>Serial No.</b>	/
<b>Test Item</b>	Antenna gain; Radiation pattern and efficiency
<b>Frequency Range</b>	2400MHz-2500MHz
<b>Received Date</b>	2022.12.19
<b>Test Date</b>	2022.12.19
<b>Remark</b>	The length of the RF cable is 295mm


## 2.3 EUT appearance

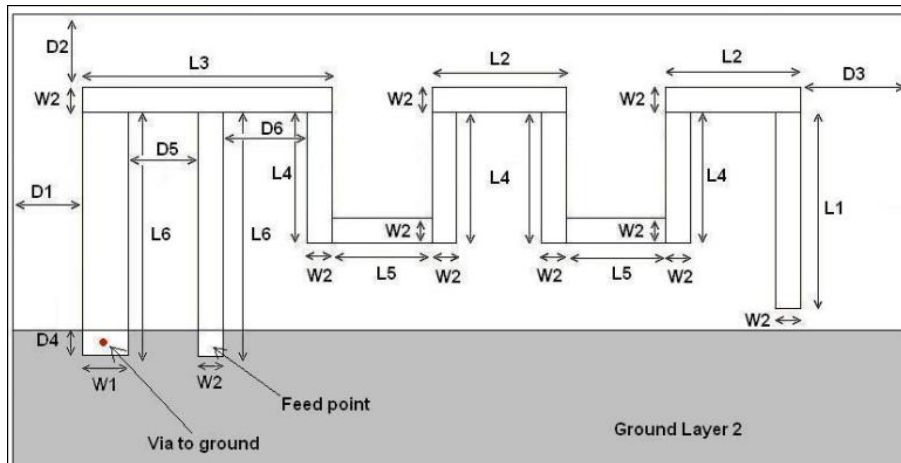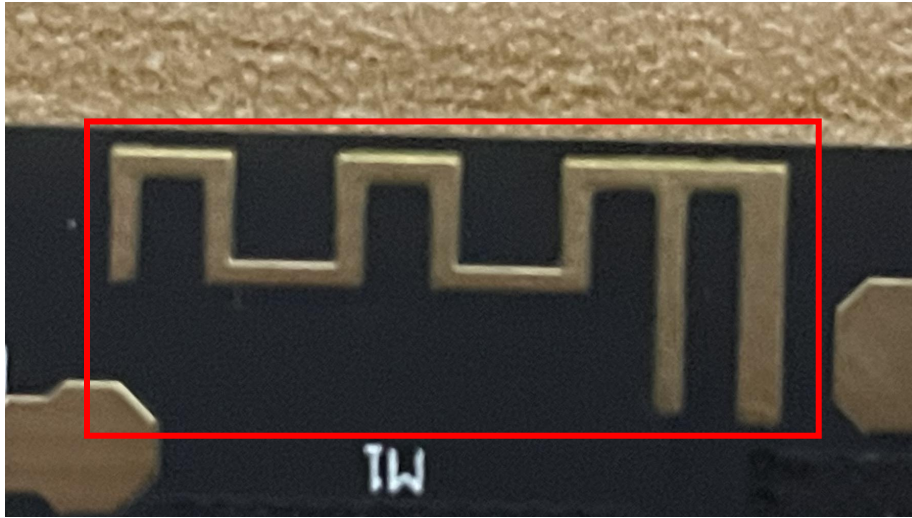



L1	2.47mm
L2	2.7mm
L3	5.0mm
L4	2.47mm
L5	2.53mm
L6	6.50mm
W1	0.9mm
W2	0.5mm
D1	3.0mm
D2	0.6mm
D3	5.5mm
D4	0.65mm
D5	1.4mm
D6	1.7mm

## 2.4 EUT setup photo of free space OTA testing

Planform

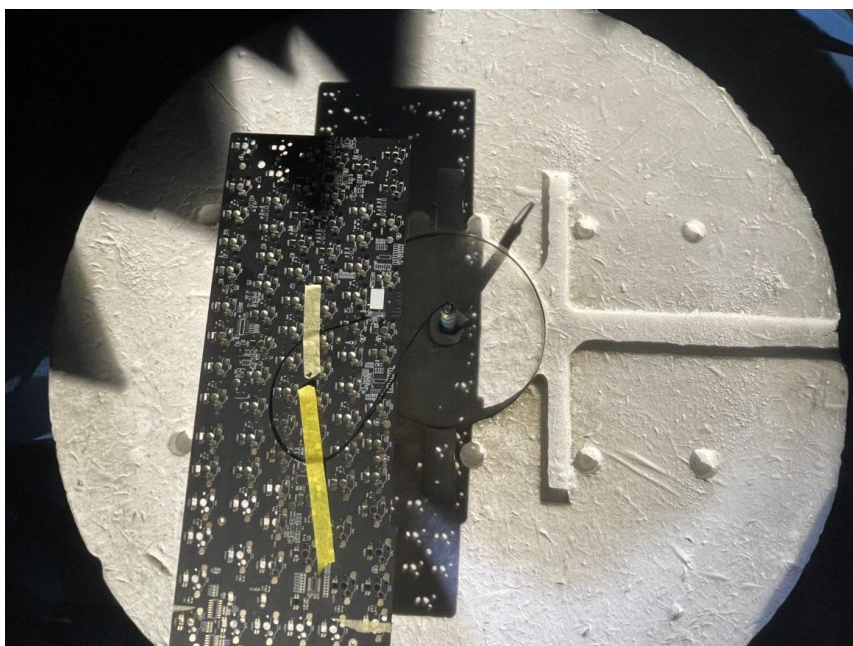

Front view

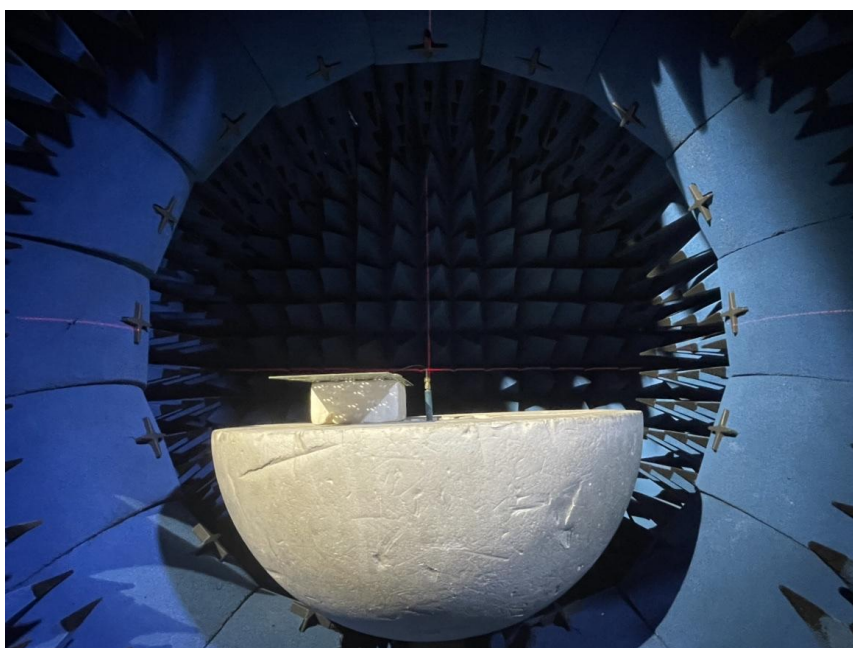

## 3. Test Results

### 3.1 Test standard

Name	Parameter	Method	Standard no.
Mobile communication antenna	Antenna gain	Generic specification for antennas used in the mobile communications	GB/T 9410-2008
	Radiation pattern		
Antenna	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979
	Gain and directivity		

### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

Item	Uncertainty
Antenna gain	$\pm 1\text{dB}$
Radiation efficiency	$\pm 10\%$



### 3.3 Test data


#### 3.3.1 Typical free space efficiency and gain

Frequency/MHz	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain/dBi	-3.32	-3.66	-3.78	-3.88	-4.06	-4.00	-4.15	-4.40	-4.48	-4.17	-4.15
Efficiency/%	10.41	9.62	9.20	8.90	8.58	8.75	8.47	7.97	7.81	8.14	8.17

#### 3.3.2 Typical free space radiation pattern


(1) X-Z Plane:

$V \text{ Phi}=0$

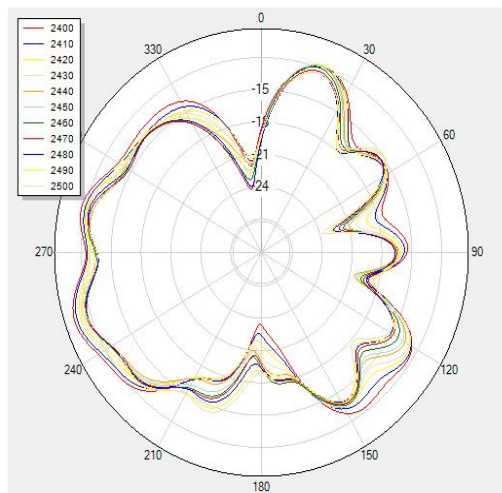


(2) Y-Z Plane:

$V \text{ Phi}=90$

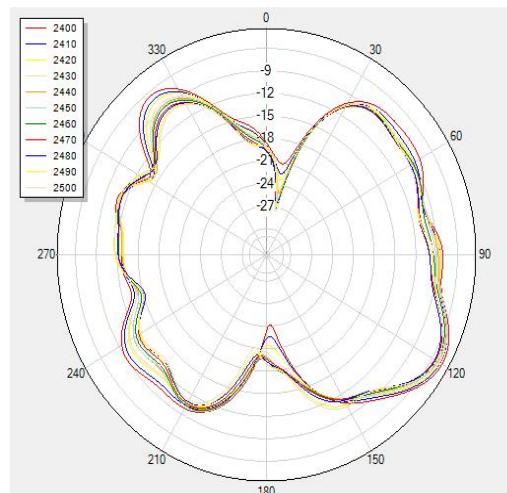


(3) X-Y Plane:

**H Theta=90**

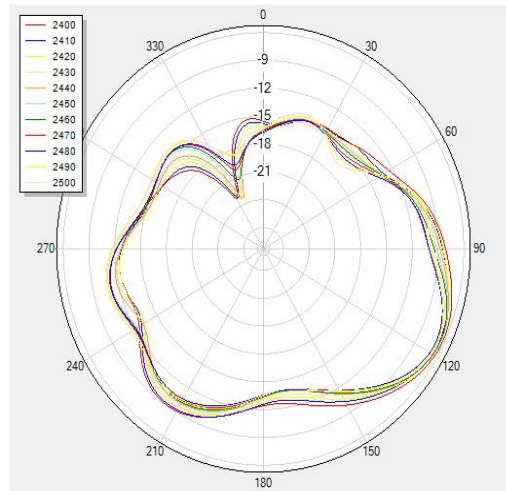

(4) Typical Free Space 3D Radiation Pattern at 2.45GHz:

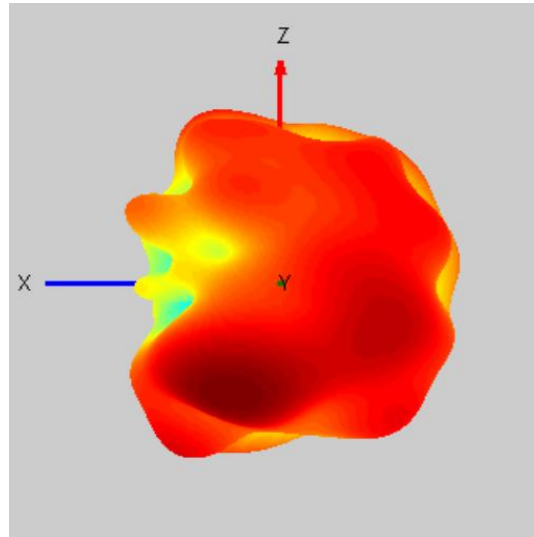

-----  
**End**

**(The following is blank)**