




5260-5320MHz

802.11a-5260




802.11a-5280

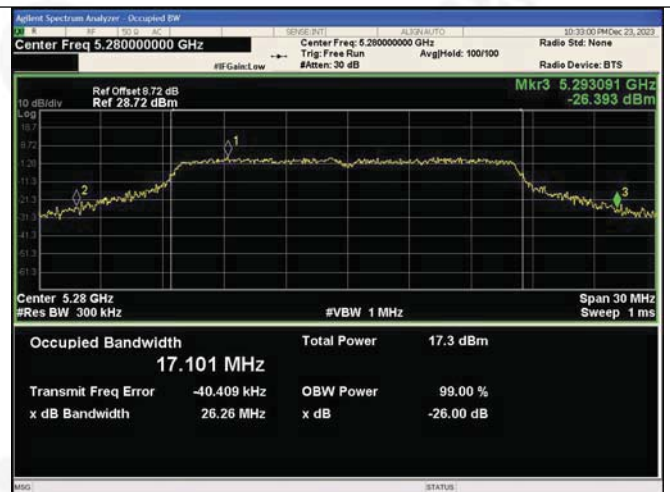

802.11a-5320



802.11ac(VH20)-5260

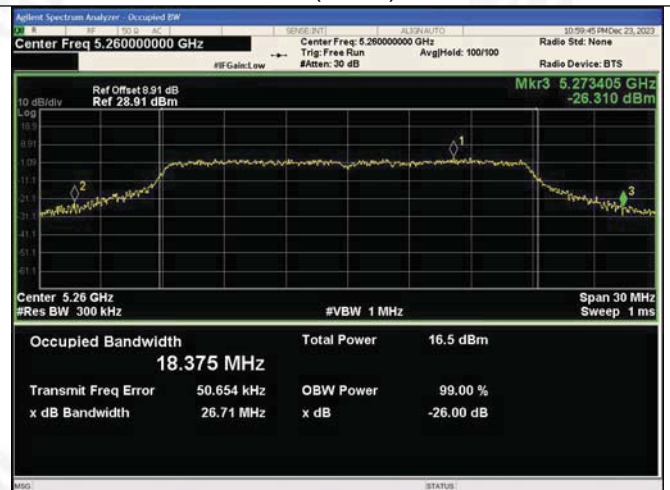


802.11ac(VH20)-5280




802.11ac(VH20)-5320



802.11ac(VH40)-5270



802.11ac(VH40)-5310





802.11ax(VH20)-5260



802.11ax(VH20)-5280




802.11ax(VH20)-5320




802.11ax(VH40)-5270




802.11ax(VH40)-5310

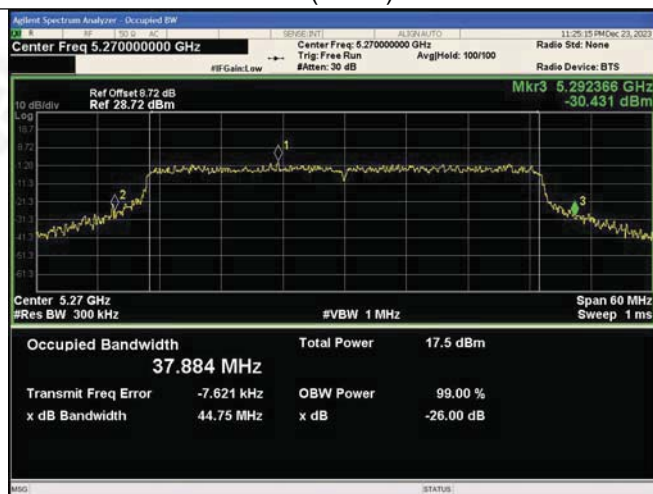

802.11n(HT20)-5260

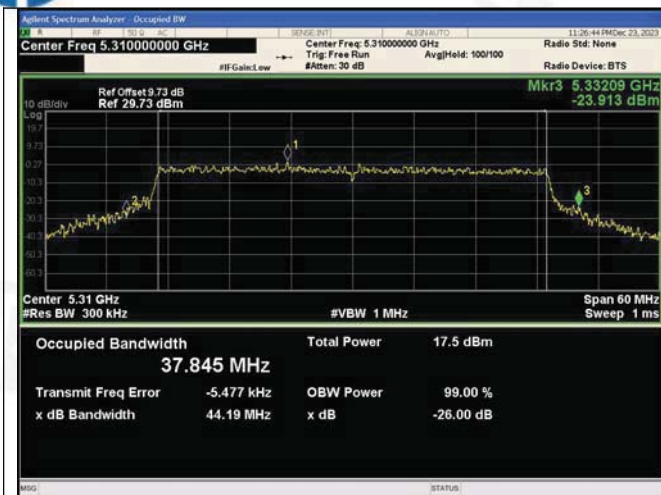


802.11n(HT20)-5280

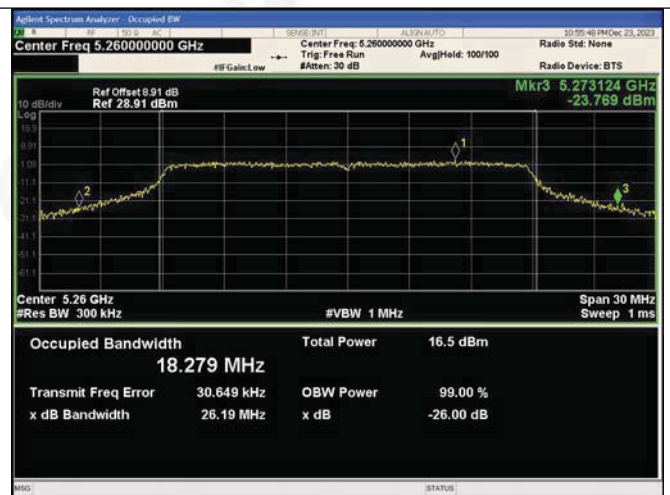



802.11n(HT20)-5320



802.11n(HT40)-5270

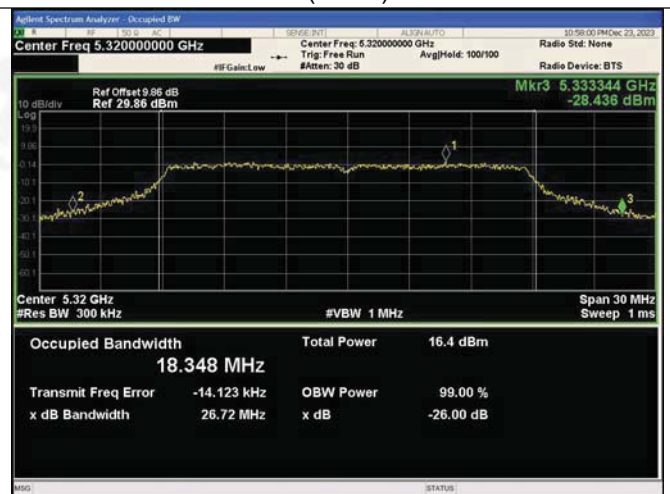

802.11n(HT40)-5310

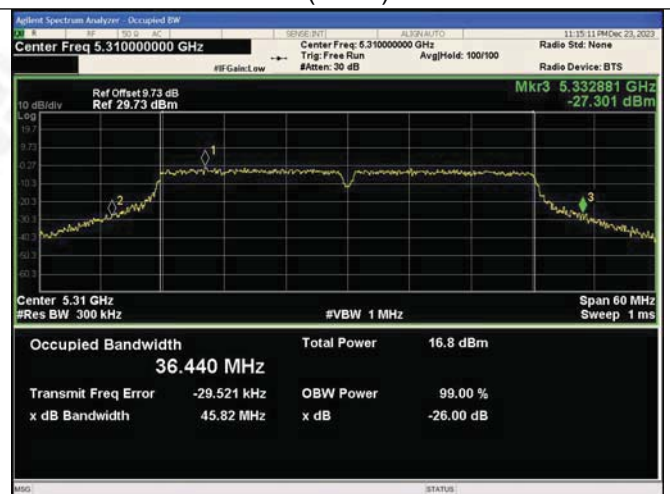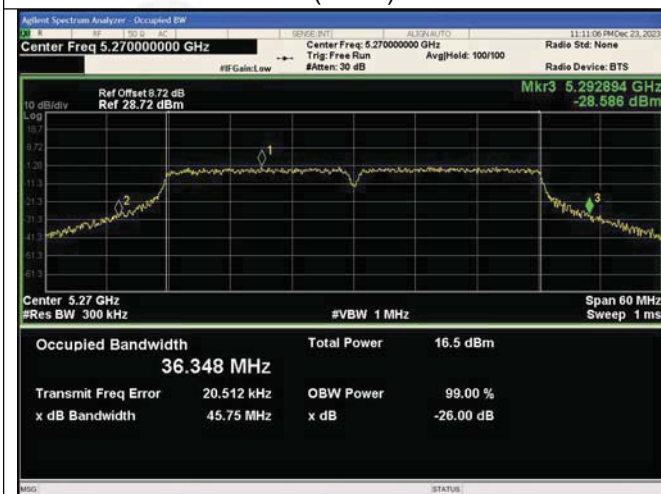




5500-5700MHz


802.11a-5500




802.11a-5580

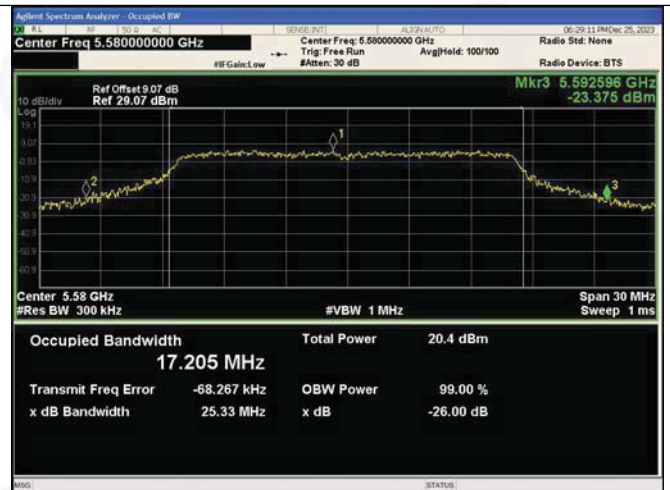

802.11a-5700

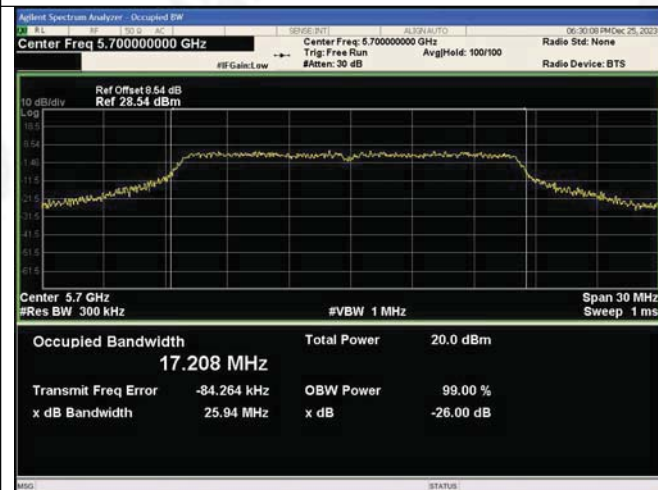


802.11ac(VH20)-5500

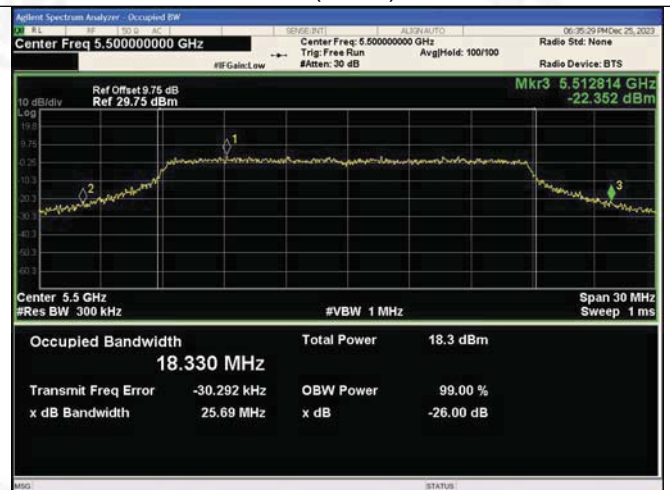

802.11ac(VH20)-5580



802.11ac(VH20)-5700

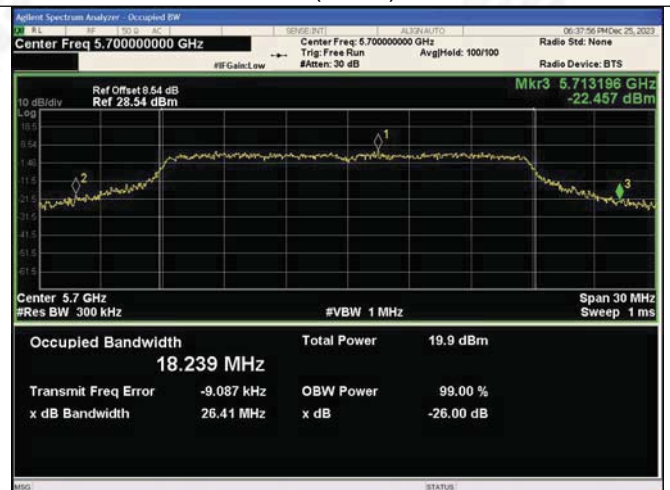

802.11ac(VH40)-5510

802.11ac(VH40)-5670




802.11ax(VH20)-5500



802.11ax(VH20)-5580




802.11ax(VH20)-5700

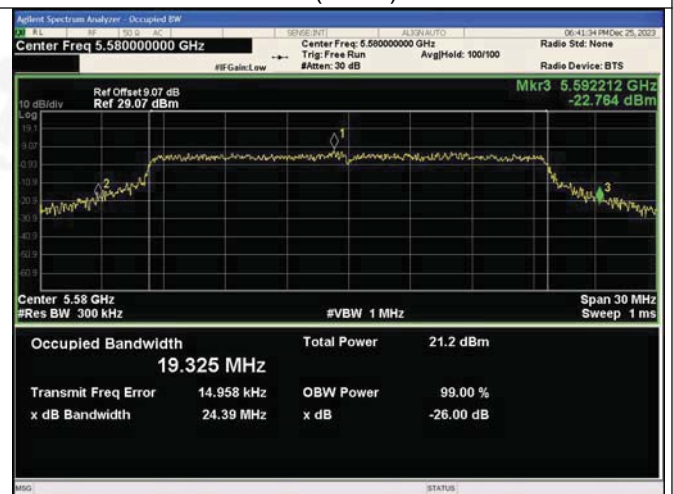


802.11ax(VH40)-5510



802.11ax(VH40)-5670

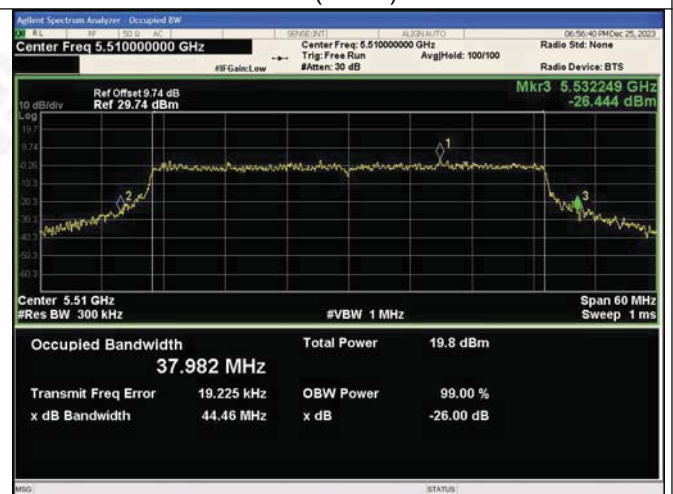

802.11n(HT20)-5500

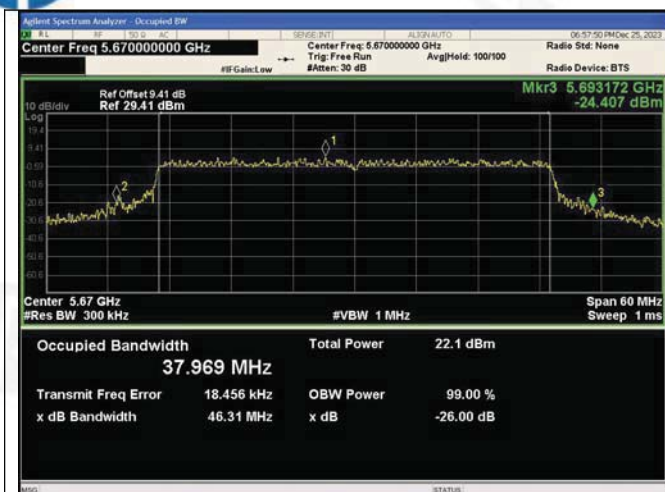

802.11n(HT20)-5580



802.11n(HT20)-5700



802.11n(HT40)-5510




802.11n(HT40)-5670





5745-5825MHz

802.11a-5745

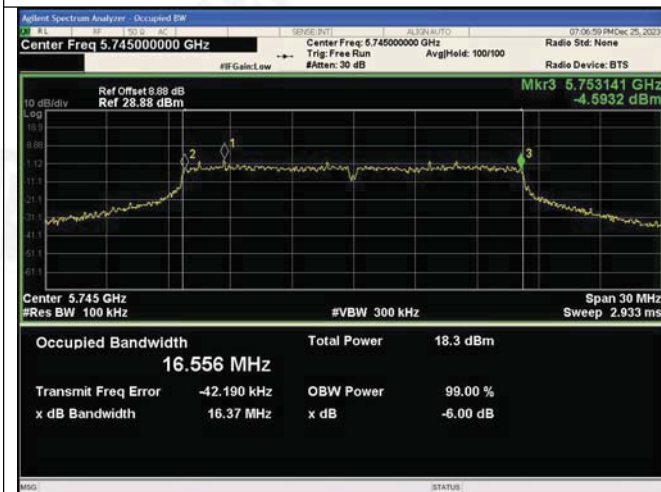

802.11a-5785



802.11a-5825



802.11ac(VH20)-5745



802.11ac(VH20)-5785



802.11ac(VH20)-5825



802.11ac(VH40)-5755



802.11ac(VH40)-5795






802.11ax(VH20)-5745




802.11ax(VH20)-5785



802.11ax(VH20)-5825

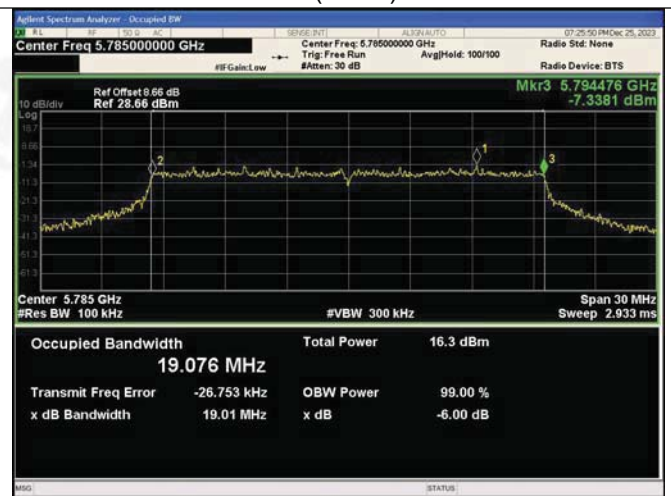


802.11ax(VH40)-5755

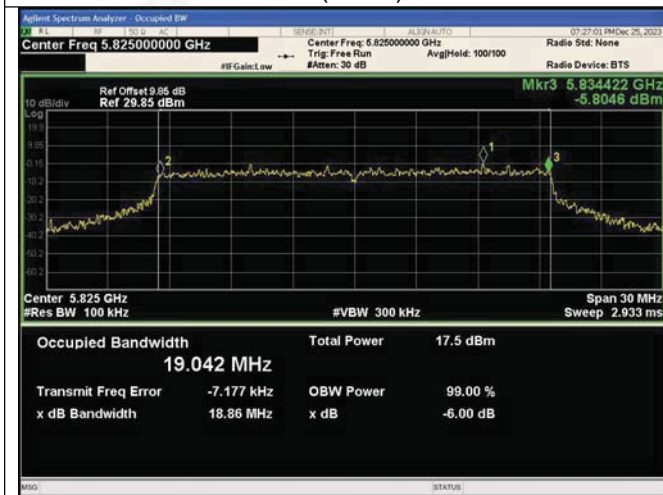


802.11ax(VH40)-5795



802.11n(HT20)-5745

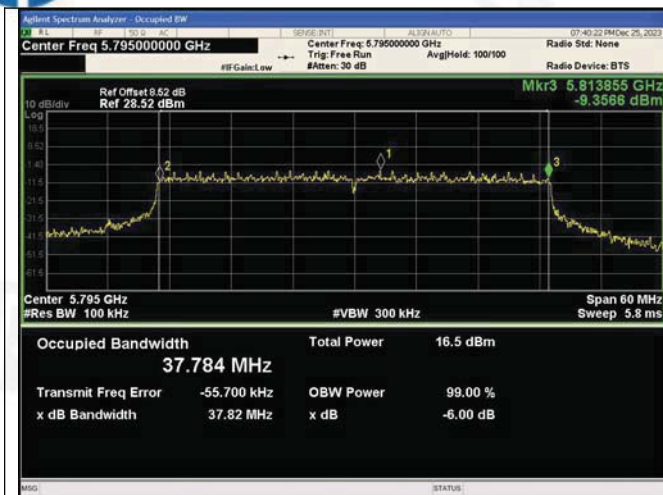

802.11n(HT20)-5785

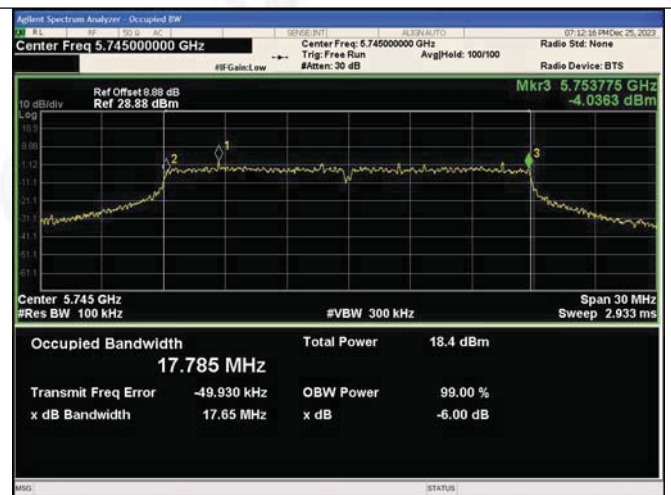

802.11n(HT20)-5825



802.11n(HT40)-5795




802.11n(HT40)-5825





11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

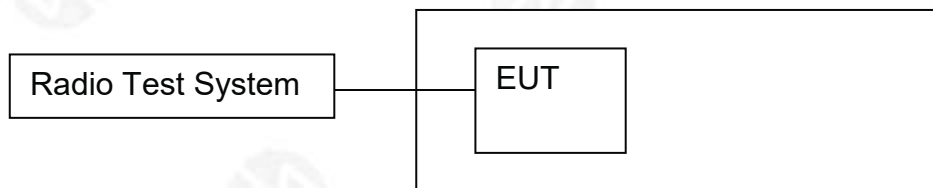

11.2 Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

a) Set $\text{RBW} \geq 1/T$, where T is defined in II.B.1.a).

b) Set $\text{VBW} \geq 3 \text{ RBW}$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured



result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.



11.4 Test Result

5180-5240MHz

Test mode	Test Channel (MHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	5180	-1.251	11	Pass
	5200	-0.71	11	Pass
	5240	-0.796	11	Pass
802.11ac(HT20)	5180	-1.713	11	Pass
	5200	-0.926	11	Pass
	5240	-0.876	11	Pass
802.11ac(HT40)	5190	-4.756	11	Pass
	5230	-4.478	11	Pass
802.11ax(HT20)	5180	-2.172	11	Pass
	5200	-1.177	11	Pass
	5240	-1.35	11	Pass
802.11ax(HT40)	5190	-4.997	11	Pass
	5230	-4.623	11	Pass
802.11n(HT20)	5180	-1.608	11	Pass
	5200	-0.867	11	Pass
	5240	-0.918	11	Pass
802.11n(HT40)	5190	-4.823	11	Pass
	5230	-4.603	11	Pass

5260-5320MHz

Test mode	Test Channel (MHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	5260	0.273	11	Pass
	5280	0.516	11	Pass
	5320	-0.068	11	Pass
802.11ac(VH20)	5260	-0.845	11	Pass
	5280	-0.545	11	Pass
	5320	-0.936	11	Pass
802.11ac(VH40)	5270	-4.419	11	Pass
	5310	-4.226	11	Pass
802.11ax(VH20)	5260	-1.31	11	Pass
	5280	-0.973	11	Pass
	5320	-1.483	11	Pass
802.11ax(VH40)	5270	-4.447	11	Pass
	5310	-4.103	11	Pass
802.11n(VH20)	5260	-0.649	11	Pass
	5280	-0.43	11	Pass
	5320	-0.906	11	Pass
802.11n(VH40)	5270	-4.007	11	Pass
	5310	-4.013	11	Pass



5500-5700MHz

Test mode	Test Channel (MHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	5500	1.464	11	Pass
	5580	3.356	11	Pass
	5700	2.869	11	Pass
802.11ac(VH20)	5500	0.967	11	Pass
	5580	2.891	11	Pass
	5700	2.601	11	Pass
802.11ac(VH40)	5510	-1.889	11	Pass
	5670	0.037	11	Pass
802.11ax(VH20)	5500	0.729	11	Pass
	5580	2.784	11	Pass
	5700	2.444	11	Pass
802.11ax(VH40)	5510	-1.954	11	Pass
	5670	-0.021	11	Pass
802.11n(HT20)	5500	1.035	11	Pass
	5580	2.81	11	Pass
	5700	2.637	11	Pass
802.11n(HT40)	5510	-1.722	11	Pass
	5670	0.197	11	Pass

5745-5825MHz

Test mode	Test Channel (MHz)	PSD (dBm/500kHz) ANT 1	Limit (dBm/500kHz)	Result
802.11a	5745	-1.544	30	Pass
	5785	-4.194	30	Pass
	5825	-2.561	30	Pass
802.11ac(VH20)	5745	-1.668	30	Pass
	5785	-4.231	30	Pass
	5825	-2.848	30	Pass
802.11ac(VH40)	5755	-5.399	30	Pass
	5795	-7.549	30	Pass
802.11ax(VH20)	5745	-2.415	30	Pass
	5785	-4.553	30	Pass
	5825	-3.095	30	Pass
802.11ax(VH40)	5755	-5.448	30	Pass
	5795	-7.662	30	Pass
802.11n(HT20)	5745	-1.924	30	Pass
	5785	-4.152	30	Pass
	5825	-2.802	30	Pass
802.11n(HT40)	5755	-4.928	30	Pass
	5795	-7.715	30	Pass



Test Graph
5180-5240MHz

802.11a-5180



802.11a-5200



802.11a-5240



802.11ac(VH20)-5180




802.11ac(VH20)-5200




802.11ac(VH20)-5240



802.11ac(VH40)-5190



802.11ac(VH40)-5230





802.11ax(VH20)-5180



802.11ax(VH20)-5200



802.11ax(VH20)-5240



802.11ax(VH40)-5190



802.11ax(VH40)-5230



802.11n(HT20)-5180



802.11n(HT20)-5200



802.11n(HT20)-5240



802.11n(HT40)-5190



802.11n(HT40)-5230





5260-5320MHz

802.11a-5260



802.11a-5280



802.11a-5320



802.11ac(VH20)-5260



802.11ac(VH20)-5280



802.11ac(VH20)-5320



802.11ac(VH40)-5270

802.11ac(VH40)-5310



802.11ax(VH20)-5260



802.11ax(VH20)-5280



802.11ax(VH20)-5320



802.11ax(VH40)-5270




802.11ax(VH40)-5310



802.11n(HT20)-5260



802.11n(HT20)-5280

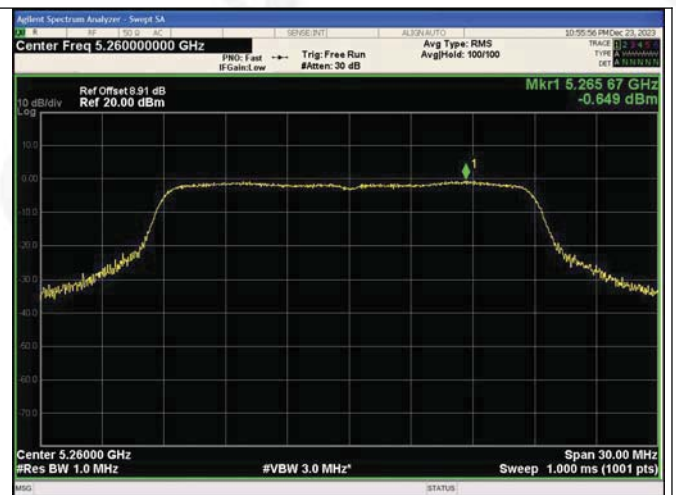

802.11n(HT20)-5320



802.11n(HT40)-5270



802.11n(HT40)-5310





5500-5700MHz

802.11a-5500




802.11a-5580



802.11a-5700




802.11ac(VH20)-5500

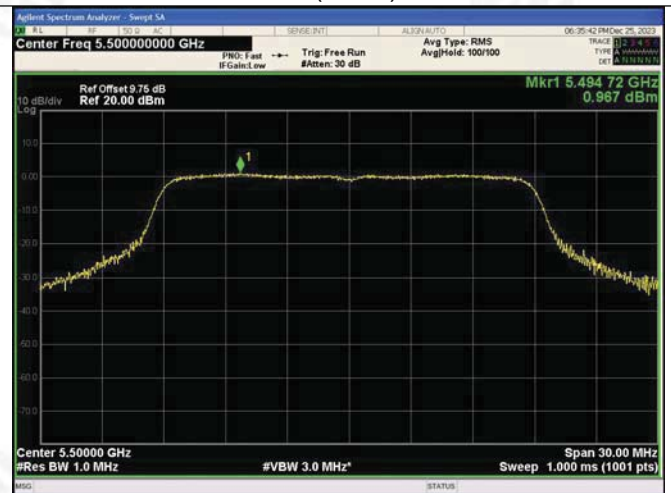

802.11ac(VH20)-5580




802.11ac(VH20)-5700

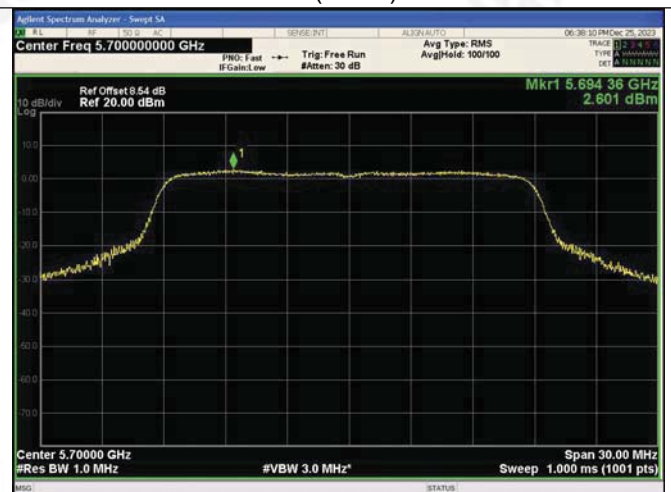

802.11ac(VH40)-5510

802.11ac(VH40)-5670

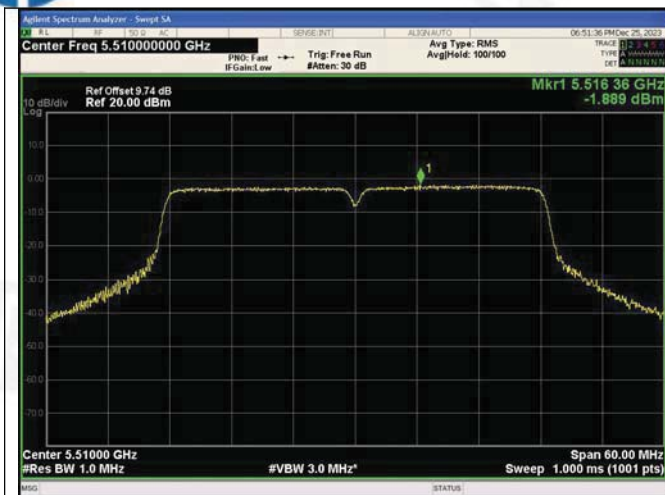

802.11ax(VH20)-5500



802.11ax(VH20)-5580



802.11ax(VH20)-5700



802.11ax(VH40)-5510



802.11ax(VH40)-5670



802.11n(HT20)-5500



802.11n(HT20)-5580



802.11n(HT20)-5700



802.11n(HT40)-5510



802.11n(HT40)-5670





5745-5825MHz

802.11a-5745



802.11a-5785



802.11a-5825



802.11ac(VH20)-5745



802.11ac(VH20)-5785



802.11ac(VH20)-5825



802.11ac(VH40)-5755

802.11ac(VH40)-5795



802.11ax(VH20)-5745



802.11ax(VH20)-5785



802.11ax(VH20)-5825



802.11ax(VH40)-5755



802.11ax(VH40)-5795



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825



802.11n(HT40)-5795



802.11n(HT40)-5825

