


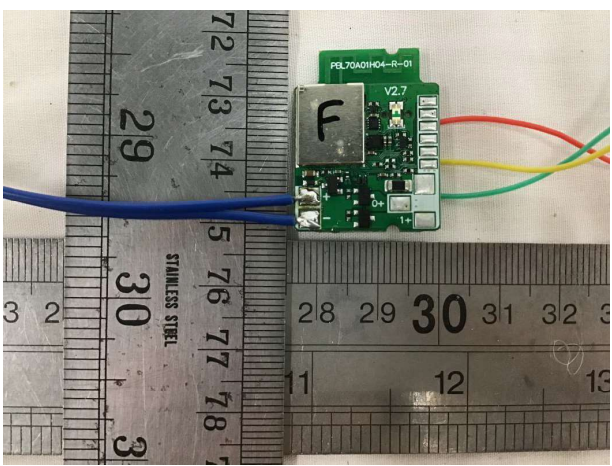

<b>Prüfbericht-Nr.:</b> Test Report No.:	<b>CN217TE3 001</b>	<b>Auftrags-Nr.:</b> Order No.:	<b>158243766</b>	<b>Seite 1 von 18</b> Page 1 of 18
<b>Kunden-Referenz-Nr.:</b> Client Reference No.:	<b>N/A</b>	<b>Auftragsdatum:</b> Order date:	<b>28.12.2021</b>	
<b>Auftraggeber:</b> Client:	<b>Clim8</b> <b>K Ouest Building, 53 Rue de l'Etang, 69760 Limonest, France</b>			
<b>Prüfgegenstand:</b> Test item:	<b>Bluetooth module for intelligent heated wearables</b>			
<b>Bezeichnung / Typ-Nr.:</b> Identification / Type No.:	<b>core8+</b>			
<b>Auftrags-Inhalt:</b> Order content:	<b>FCC and ISED Certification</b>			
<b>Prüfgrundlage:</b> Test specification:	<b>FCC Part 15 Subpart C, ANSI C63.10-2013</b> <b>RSS-247 Issue 2, RSS-Gen Issue 5</b>			
<b>Wareneingangsdatum:</b> Date of receipt:	<b>28.12.2021</b>			
<b>Prüfmuster-Nr.:</b> Test sample No.:	<b>A003107926-002</b>			
<b>Prüfzeitraum:</b> Testing period:	<b>28.12.2021 – 20.01.2021</b>			
<b>Ort der Prüfung:</b> Place of testing:	<b>Hong Kong</b>			
<b>Prüflaboratorium:</b> Testing laboratory:	<b>TÜV Rheinland Hong Kong Ltd.</b>			
<b>Prüfergebnis*:</b> Test result*:	<b>Pass</b>			
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>		
				
<b>Datum</b> Date	<b>Name / Stellung</b> Name / Position	<b>Unterschrift</b> Signature	<b>Datum</b> Date	<b>Name / Stellung</b> Name / Position
07.02.2022	Felicia Chan / Assistant Engineer		07.02.2022	Sharon Li / Unit Senior Manager
<b>Sonstiges / Other:</b> FCC ID: 2AXEQ-CORE8PLUS IC ID: 28025-CORE8PLUS "Decision Rule" document announced in our website ( <a href="https://www.tuv.com/landingpage/en/qm-gcn/">https://www.tuv.com/landingpage/en/qm-gcn/</a> ) describes the statement of conformity and its rule of enforcement for test results are applicable throughout this test report.				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> Condition of the test item at delivery:		<b>Prüfmuster vollständig und unbeschädigt</b> Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

## Table of Content

	Page
<b>Cover Page .....</b>	<b>1</b>
<b>Table of Content .....</b>	<b>2</b>
<b>Product information .....</b>	<b>4</b>
<b>Manufacturers declarations .....</b>	<b>4</b>
<b>Product function and intended use .....</b>	<b>4</b>
<b>Submitted documents .....</b>	<b>4</b>
<b>Independent Operation Modes .....</b>	<b>4</b>
<b>Related Submittal(s) Grants .....</b>	<b>4</b>
<b>Remark .....</b>	<b>5</b>
<b>Test Set-up and Operation Mode .....</b>	<b>6</b>
<b>Principle of Configuration Selection .....</b>	<b>6</b>
<b>Test Operation and Test Software .....</b>	<b>6</b>
<b>Special Accessories and Auxiliary Equipment .....</b>	<b>6</b>
<b>Countermeasures to achieve EMC Compliance .....</b>	<b>6</b>
<b>Test Methodology .....</b>	<b>7</b>
<b>Radiated Emission .....</b>	<b>7</b>
<b>Field Strength Calculation .....</b>	<b>7</b>
<b>Test Setup Diagram .....</b>	<b>8</b>
<b>Test Facility .....</b>	<b>10</b>
<b>Test Laboratory Information .....</b>	<b>10</b>
<b>List of Test and Measurement Instruments .....</b>	<b>11</b>
<b>Measurement Uncertainty .....</b>	<b>12</b>
<b>Results FCC Part 15 – Subpart C / RSS-247 Issue 2 .....</b>	<b>13</b>
<b>FCC 15.203 – Antenna Requirement 1 .....</b>	<b>Pass 13</b>
<b>FCC 15.204 – Antenna Requirement 2 .....</b>	<b>N/A 13</b>
<b>RSS-Gen 6.3 – External Control .....</b>	<b>Pass 13</b>
<b>RSS-Gen 8.3 – Antenna Requirement .....</b>	<b>Pass 13</b>
<b>FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains .....</b>	<b>N/A 14</b>
<b>FCC 15.247 (a)(2) / RSS-247 5.2 – 6dB Bandwidth Measurement .....</b>	<b>Pass 14</b>

<b>RSS-Gen 6.6 – Occupied Bandwidth .....</b>	<b>Pass .....</b>	<b>14</b>
<b>FCC 15.247(b)(3) / RSS-247 5.4 – Maximum Peak Conducted Output Power .....</b>	<b>Pass .....</b>	<b>15</b>
<b>FCC 15.247(e) / RSS-247 5.2 – Power Spectral Density .....</b>	<b>Pass .....</b>	<b>15</b>
<b>FCC 15.247(d) / RSS-247 5.5 – Spurious Conducted Emissions.....</b>	<b>Pass .....</b>	<b>16</b>
<b>FCC 15.205/ RSS-Gen 8.9 – Radiated Emissions in Restricted Frequency Bands.....</b>	<b>Pass.....</b>	<b>17</b>
<b>Appendix 1 – Test protocols .....</b>		<b>17 pages</b>
<b>Appendix 2 – Test setup .....</b>		<b>3 pages</b>
<b>Appendix 3 – EUT External Photos .....</b>		<b>2 pages</b>
<b>Appendix 4 – EUT Internal Photos .....</b>		<b>2 pages</b>
<b>Appendix 5 – RF exposure information.....</b>		<b>2 pages</b>

## Product information

### Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	Integral PCB antenna
Antenna gain (dBi)	0 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	No
Nominal voltage	8.4 VDC
Independent Operation Modes	Transmitting

### Product function and intended use

The equipment under test (EUT) is a Bluetooth low energy module for controlling wearable heating system.

FCC ID: 2AXEQ-CORE8PLUS/ IC ID: 28025-CORE8PLUS

Models	Product description
core8+	Bluetooth module for intelligent heated wearables

### Submitted documents

Circuit Diagram  
Block Diagram  
Technical Description  
User manual  
Label

### Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

### Related Submittal(s) Grants

This is a single application for certification of the transmitter.

### **Remark**

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production. A rechargeable Li battery model LIP-654060-2S was provided by the client and was used as a source of power supply during the test.

## Test Set-up and Operation Mode

### Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### Test Operation and Test Software

Test operation should refer to test methodology.

- A test mode sample is provided by the applicant to control the operating channel. The RF output power is fixed in the test mode sample. The setting of the RF output power used in the testing shall be fixed on the firmware of the final end product.

### Special Accessories and Auxiliary Equipment

- None

### Countermeasures to achieve EMC Compliance

- None

## Test Methodology

### Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360 °, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

### Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.


FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


## Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

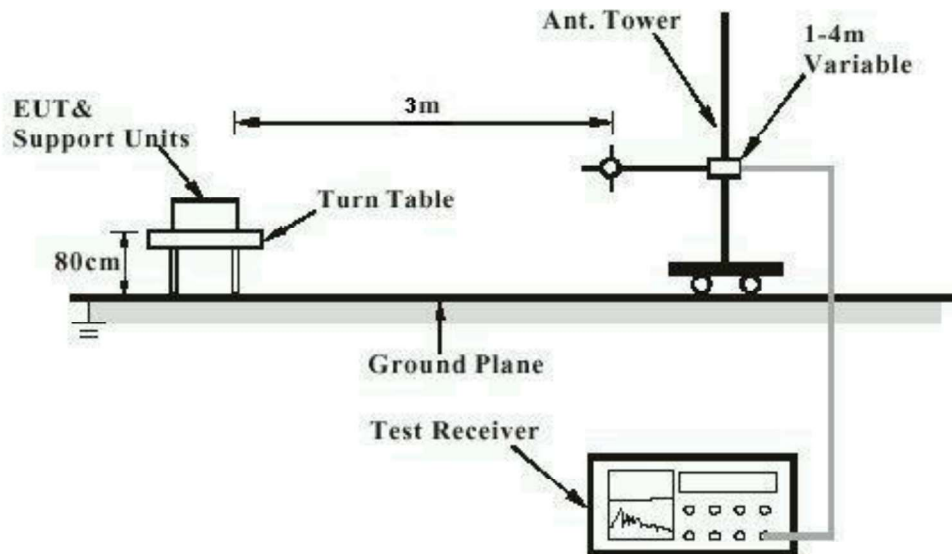


Note: Measurements above 1 GHz are done with a table height of 1.5 m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

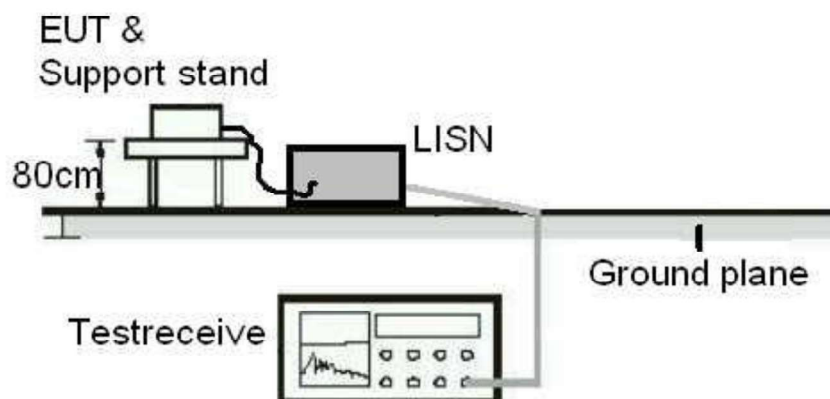

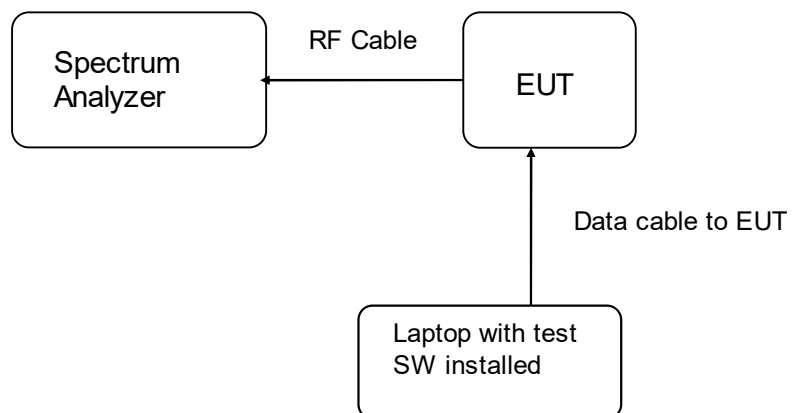

**Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)**

## Test Facility

### Test Laboratory Information

TÜV Rheinland Hong Kong Ltd.

Address: 3-4/F, Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong

Tel.: +852 2192 1000

Fax: +852 2192 1001

Email [service-gc@tuv.com](mailto:service-gc@tuv.com)

The test facility is recognized or accredited by the following organizations:

#### **FCC**

Test Firm Registration Number : 371735

#### **ISED/IC**

Test Site Registration Number : 26152

## List of Test and Measurement Instruments

### Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	5-Mar-21	5-Mar-22
Multi-functional Anechoic Chamber	Albatross	Nil	04-Jan-22	04-Jan-23
Test Receiver	R & S	ESW44	20-Sep-21	7-Sep-22
Active Loop Antenna	EMCO	6502	3-Nov-20	3-Nov-22
Bi-conical Antenna	R & S	HK116	15-Sep-20	15-Sep-22
Log Periodic Antenna	R & S	HL223	15-Sep-20	15-Sep-22
Standard Gain Horn	ETS-Lindgren	3160-07	24-Nov-20	24-Nov-22
Standard Gain Horn	ETS-Lindgren	3160-08	24-Nov-20	24-Nov-22
Standard Gain Horn	ETS-Lindgren	3160-10	30-Oct-20	30-Oct-22
Double-Ridged Waveguide Horn	EMCO	3116	30-Oct-20	30-Oct-22
Double-Ridged Waveguide Horn	EMCO	3117	11-Nov-20	11-Nov-22
Coaxial cable	Harbour	SF118/11n/11n/1 2000.0	3-Aug-20	3-Aug-22
High Frequency Cable	Pasternack	PE3VNA4001- 3M	29-Jan-21	29-Jan-23
Microwave amplifier 0.5- 26.5GHz, 25dB gain	COM-POWER Corporation	PAM-118A	5-Mar-21	5-Mar-22
Preamplifier 18GHz to 40GHz with cable (EMC656)	A.H. Systems, Inc.	PAM-1840VH	29-Jan-21	29-Jan-22

### Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Signal and Spectrum Analyzer	R & S	FSV40	29-Nov-21	29-Nov-22

## Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is 2.28dB.

The estimated combined standard uncertainty for radiated emissions measurements is 3.23dB (9kHz to 30MHz) and 5.18dB (30MHz to 200MHz) and 6.09dB (200MHz to 1000MHz) and is 4.91dB (1GHz to 8.2GHz) and 4.78dB (8.2GHz to 12.4GHz) and 4.91dB (12.4GHz to 18GHz)

The estimated combined standard uncertainty for antenna conducted emission is 2.68dB

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for the level of confidence is approximately 95%.

## Results FCC Part 15 – Subpart C / RSS-247 Issue 2

<b>FCC 15.203 – Antenna Requirement 1</b>		<b>Pass</b>
<b>FCC Requirement:</b> No antenna other than that furnished by the responsible party shall be used with the device		
<b>Results:</b>	a) Antenna type:	Integral PCB antenna
	b) Manufacturer and model no:	N/A
	c) Peak Gain:	0 dBi
<b>Verdict:</b>	Pass	

<b>FCC 15.204 – Antenna Requirement 2</b>		<b>N/A</b>
<b>FCC Requirement:</b> An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
<b>Results:</b>	Only one integral antenna can be used.	
<b>Verdict:</b>	N/A	

<b>RSS-Gen 6.3 – External Control</b>		<b>Pass</b>
<b>IC Requirement:</b> The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.		
<b>Results:</b>	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
<b>Verdict:</b>	Pass	

<b>RSS-Gen 8.3 – Antenna Requirement</b>		<b>Pass</b>
<b>IC Requirement:</b> When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.		
<b>Results:</b>	a) Antenna type:	Integral PCB antenna
	b) Manufacturer	N/A
	c) model no	N/A
	d) Gain with reference to an isotropic radiator:	0 dBi
<b>Verdict:</b>	Pass	

<b>FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains</b>	<b>N/A</b>
There is no AC power input or output ports on the EUT.	

<b>FCC 15.247 (a)(2) / RSS-247 5.2 – 6dB Bandwidth Measurement</b>	<b>Pass</b>		
<b>FCC/ IC Requirement:</b> Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.			
Test Specification : ANSI C63.10 – 2013 Test date : 18.01.2022 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 8VDC Temperature : 23°C Humidity : 50%			
<b>Results:</b> For test protocols please refer to Appendix 1			
<b>Channel frequency (MHz)</b>	<b>6 dB left (MHz)</b>	<b>6 dB right (MHz)</b>	<b>6dB bandwidth (kHz)</b>
2402	2401.634	2402.389	755.4
2442	2441.624	2442.396	772.0
2480	2479.624	2480.396	772.0

<b>RSS-Gen 6.6 – Occupied Bandwidth</b>	<b>Pass</b>		
<b>FCC/ IC Requirement:</b> N/A			
Test Specification : RSS-Gen Test date : 18.01.2022 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 8VDC Temperature : 23°C Humidity : 50%			
<b>Results:</b> Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.  For test protocols refer to Appendix 1.			
<b>Frequency (MHz)</b>	<b>Left (MHz)</b>	<b>Right (MHz)</b>	<b>99% bandwidth (MHz)</b>
2402	2401.481	2402.544	1.06
2442	2441.479	2442.544	1.06
2480	2479.479	2480.547	1.06

FCC 15.247(b)(3) / RSS-247 5.4 – Maximum Peak Conducted Output Power			Pass
<b>FCC/ IC Requirement:</b> For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)			
Test Specification : ANSI C63.10 – 2013 Test date : 18.01.2022 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 8VDC Temperature : 23°C Humidity : 50%			
<b>Results:</b> For test protocols please refer to Appendix 1			
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
2402	-9.65	1/30	Pass
2442	-9.58	1/30	Pass
2480	-9.80	1/30	Pass

FCC 15.247(e) / RSS-247 5.2 – Power Spectral Density			Pass
<b>FCC/ IC Requirement:</b> For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : ANSI C63.10 – 2013 Test date : 18.01.2022 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 8VDC Temperature : 23°C Humidity : 50%			
<b>Results:</b> For test protocols please refer to Appendix 1.			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2402	-13.43	8	Pass
2442	-15.41	8	Pass
2480	-15.54	8	Pass

FCC 15.247(d) / RSS-247 5.5 – Spurious Conducted Emissions					Pass
Test Specification : ANSI C63.10 – 2013 Test date : 18.01.2022 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 8VDC Temperature : 23°C Humidity : 50%					
<b>FCC/ IC Requirement:</b> In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
<b>Results:</b> Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.  Only the worst cases is shown below. For test protocols refer to Appendix 1					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	6987	-53.6	-13.43	-40.17	Pass
2442	6292	-54.0	-15.41	-38.59	Pass
2480	6987	-54.2	-15.54	-38.66	Pass



**FCC 15.205/ RSS-Gen 8.9 – Radiated Emissions in Restricted Frequency Bands Pass**

Test Specification : ANSI C63.10 – 2013

Test Date : 18.01.2022

Mode of operation : Tx mode

Port of testing : Enclosure

Frequency range : 9kHz – 25GHz

Supply voltage : 8VDC

Temperature : 23°C

Humidity : 50%

**FCC/ IC Requirement:** In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission general limits.

**Results:** Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.

All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.

Mode: 2402MHz TX

Vertical Polarization

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	42.2	74.0 / PK
2400.000	27.1	54.0 / AV
4804.512	51.9	74.0 / PK
4804.512	44.6	54.0 / AV
7206.512	45.1	74.0 / PK
7206.512	33.4	54.0 / AV

Mode: 2402 MHz TX

Horizontal Polarization

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	45.5	74.0 / PK
2400.000	32.4	54.0 / AV
4803.493	56.4	74.0 / PK
4803.493	49.8	54.0 / AV
7206.000	45.6	74.0 / PK
7206.000	35.2	54.0 / AV

Mode: 2442 MHz TX

Vertical Polarization

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4884.000	56.1	74.0 / PK
4884.000	41.9	54.0 / AV
7326.000	46.4	74.0 / PK
7326.000	42.3	54.0 / AV

Mode: 2442 MHz TX			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4884.000	56.2	74.0 / PK	4884.000	54.8	54.0 / AV
7326.000	47.5	74.0 / PK	7326.000	41.1	54.0 / AV
Mode: 2480 MHz TX			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	40.3	74.0 / PK	2483.500	26.2	54.0 / AV
4960.000	50.4	74.0 / PK	4960.000	47.6	54.0 / AV
7460.000	44.7	74.0 / PK	7460.000	33.9	54.0 / AV
Mode: 2480 MHz TX			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	40.9	74.0 / PK	2483.500	26.9	54.0 / AV
4960.000	49.5	74.0 / PK	4960.000	45.9	54.0 / AV
7460.000	46.3	74.0 / PK	7460.000	39.4	54.0 / AV