

TEST REPORT

Report No.: BCTC2407440305-3E

Applicant: Shenzhen Creality 3D Technology Co., Ltd.

Product Name: 3D Printer

Test Model: K2 Plus

Tested Date: 2024-07-17 to 2024-07-31

Issued Date: 2024-08-09

Shenzhen BCTC Testing Co., Ltd.

FCC ID:2AXH6-K2PLUS

Product Name: 3D Printer

Trademark: **CREALITY**  CREALITY  CREALITY 创想三维

Model/Type Ref.: K2 Plus

Prepared For: Shenzhen Crealty 3D Technology Co., Ltd.

Address: 18F, JinXiuHongDu Building, Meilong Blvd., Longhua Dist., Shenzhen,China 518131

Manufacturer: Shenzhen Crealty 3D Technology Co., Ltd.

Address: 18F, JinXiuHongDu Building, Meilong Blvd., Longhua Dist., Shenzhen,China 518131

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-07-17


Sample tested Date: 2024-07-17 to 2024-07-31

Report No.: BCTC2407440305-3E

Test Standards: FCC Part15 15.407
ANSI C63.10-2013
KDB 789033 D02 v02r01

Test Results: PASS

Tested by:



Brave Zeng/ Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table of Content


Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information and Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	9
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test Procedure	13
6.4 EUT Operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test Procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	20
8. Power Spectral Density Test	32
8.1 Block Diagram Of Test Setup	32
8.2 Limit	32
8.3 Test Procedure	33
8.4 EUT Operating Conditions	33
8.5 Test Result	34
9. 26dB & 6dB & 99% Emission Bandwidth	42
9.1 Block Diagram Of Test Setup	42
9.2 Limit	42
9.3 Test Procedure	42
9.4 EUT Operating Conditions	42
9.5 Test Result	43
10. Maximum Conducted Output Power	59
10.1 Block Diagram Of Test Setup	59
10.2 Limit	59
10.3 Test Procedure	59
10.4 EUT Operating Conditions	60
10.5 Test Result	61

11. Out Of Band Emissions	62
11.1 Block Diagram Of Test Setup.....	62
11.2 Limit	62
11.3 Test Procedure	62
11.4 EUT Operating Conditions	62
11.5 Test Result.....	62
12. Spurious RF Conducted Emissions.....	69
12.1 Block Diagram Of Test Setup.....	69
12.2 Limit	69
12.3 Test Procedure	69
12.4 Test Result.....	69
13. Frequency Stability Measurement	77
13.1 Block Diagram Of Test Setup.....	77
13.2 Limit	77
13.3 Test Procedure	77
13.4 Test Result.....	78
14. Duty Cycle Of Test Signal	81
14.1 Standard Requirement	81
14.2 Formula.....	81
14.3 Test Procedure	81
14.4 Test Result.....	81
15. Antenna Requirement	82
15.1 Limit	82
15.2 Test Result.....	82
16. EUT Test Setup Photographs.....	83

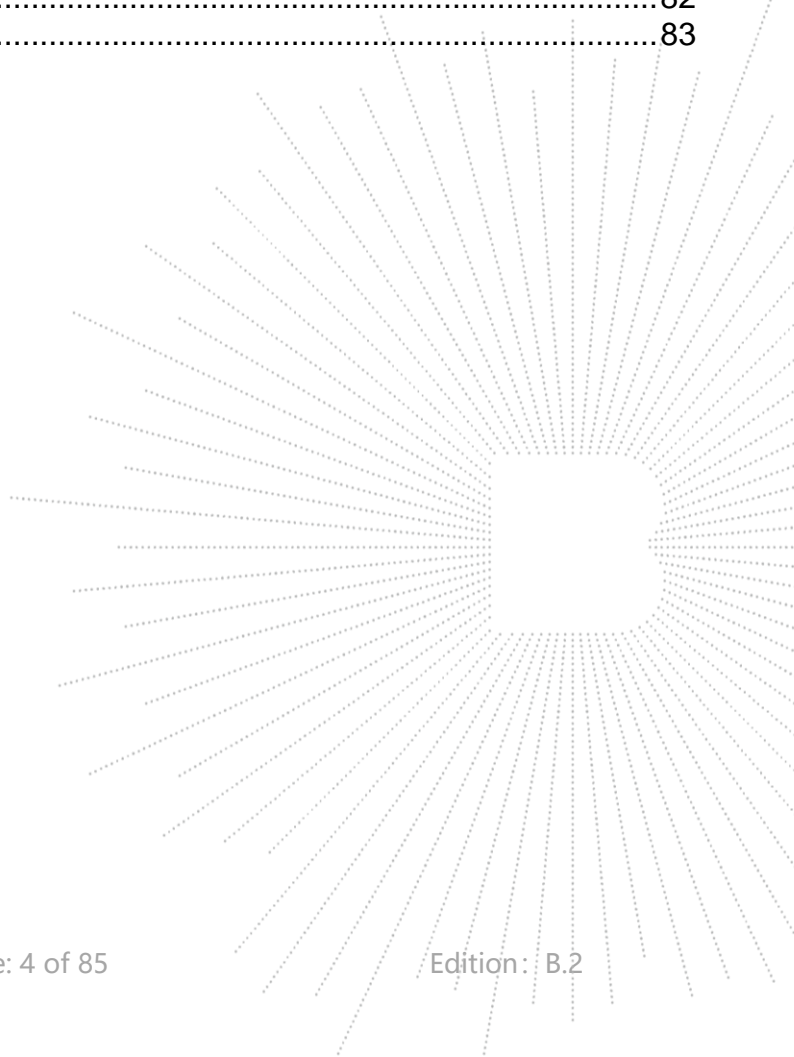

1. Version

Report No.	Issue Date	Description	Approved
BCTC2407440305-3E	2024-08-09	Original	Valid

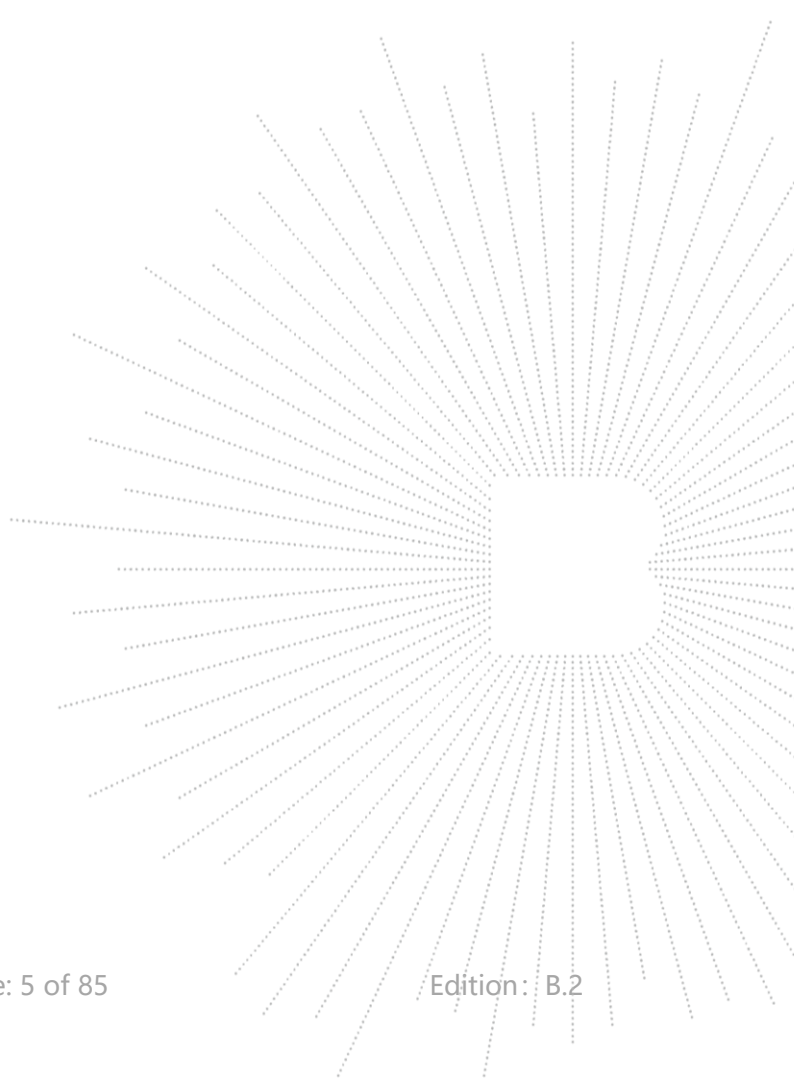

2. Test Summary


The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)	PASS
6	Band Edge	15.407(b)	PASS
7	Power Spectral Density	15.407 (a)	PASS
8	Spurious Emissions at Antenna Terminals	15.407(b)	PASS
9	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

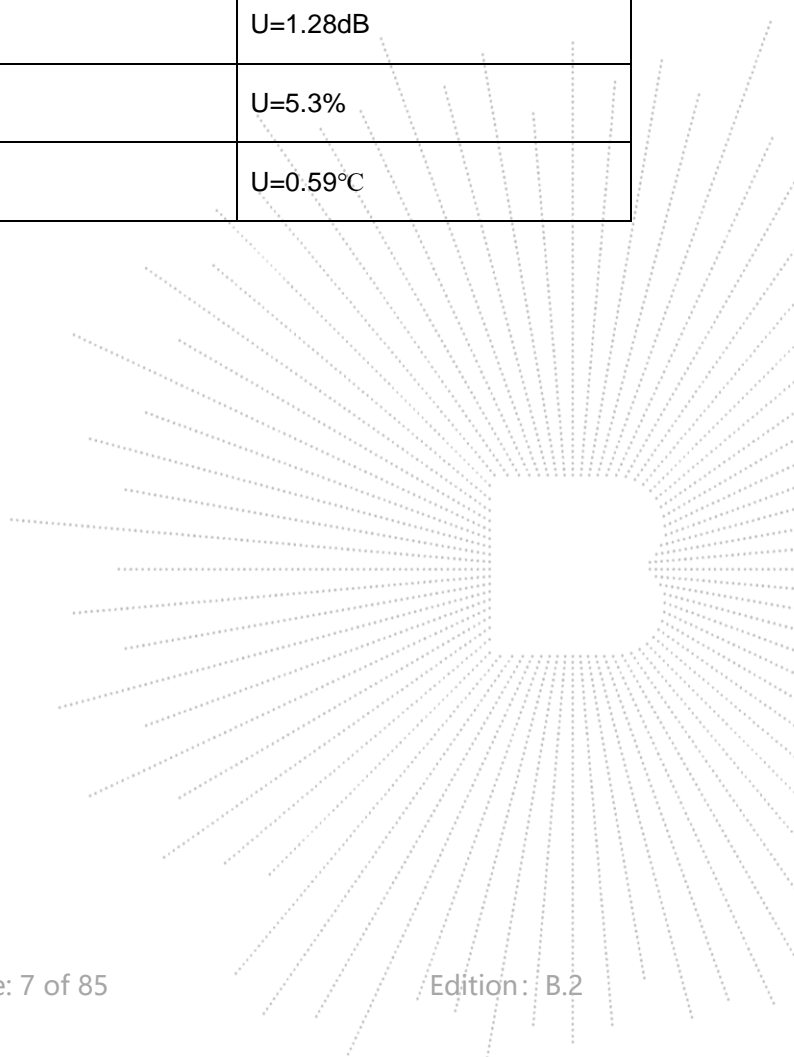

4. Product Information and Test Setup


4.1 Product Information

Model/Type Ref.:	K2 Plus
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)
Operation Frequency:	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a; <input checked="" type="checkbox"/> 5180-5240MHz for 802.11n(HT20); <input checked="" type="checkbox"/> 5180-5240MHz for 802.11ac(HT20); <input checked="" type="checkbox"/> 5190-5230MHz for 802.11n(HT40); <input checked="" type="checkbox"/> 5190-5230MHz for 802.11ac(HT40); <input checked="" type="checkbox"/> 5210MHz for 802.11ac(HT80);
Type of Modulation:	<input checked="" type="checkbox"/> OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n <input checked="" type="checkbox"/> OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac
Transmit Power:	WiFi5.1G:11.98dBm
Antenna installation:	Internal antenna
Antenna Gain:	4.09 dBi
Remark:	The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.
Power supply:	AC100-240V~50/60Hz,1200W


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	3D Printer	N/A	K2 Plus	N/A	EUT
E-2	N/A	N/A	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Frequency and Channel list for 802.11a/n/ac (20 MHz) (5180-5240MHz):

802.11a/n/ac (20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac (40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

4.5 Test Mode


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac 40 CH38/ CH 46 802.11n/ ac 40 CH 151 / CH 159
Mode 3	Link Mode

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Parameters	DEF	DEF	DEF

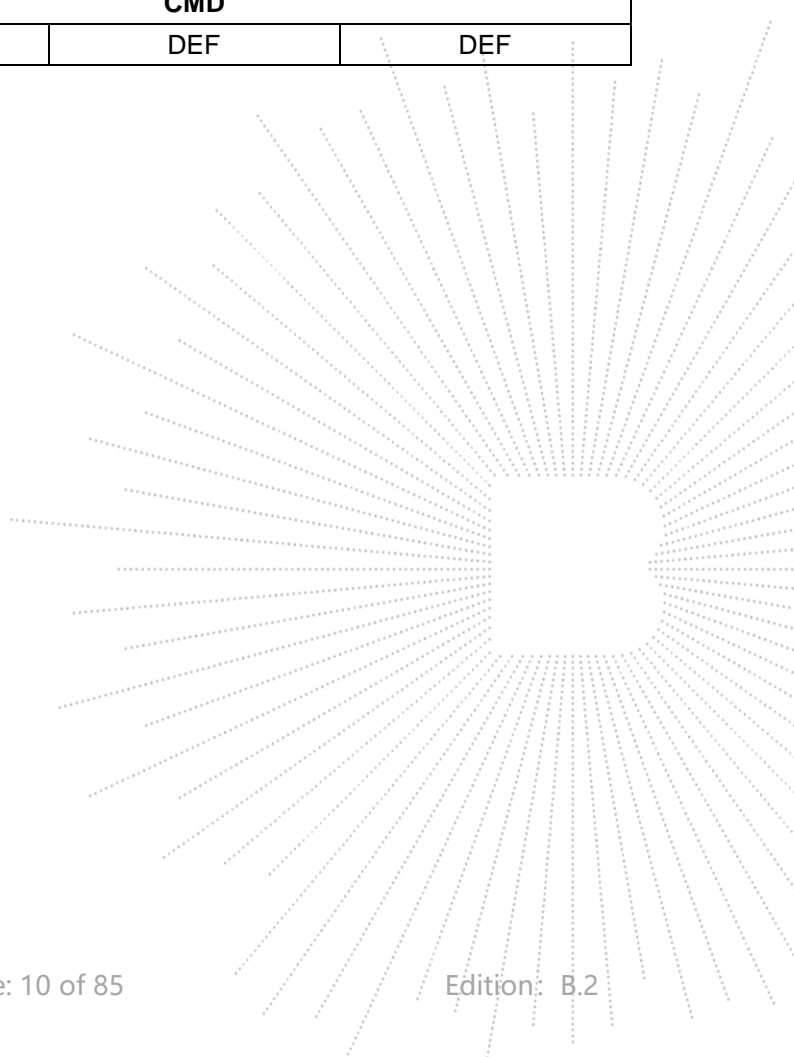

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD 9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025

Radiated Emissions Test (966 Chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G1 8G-45dB	SK202104090 1	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

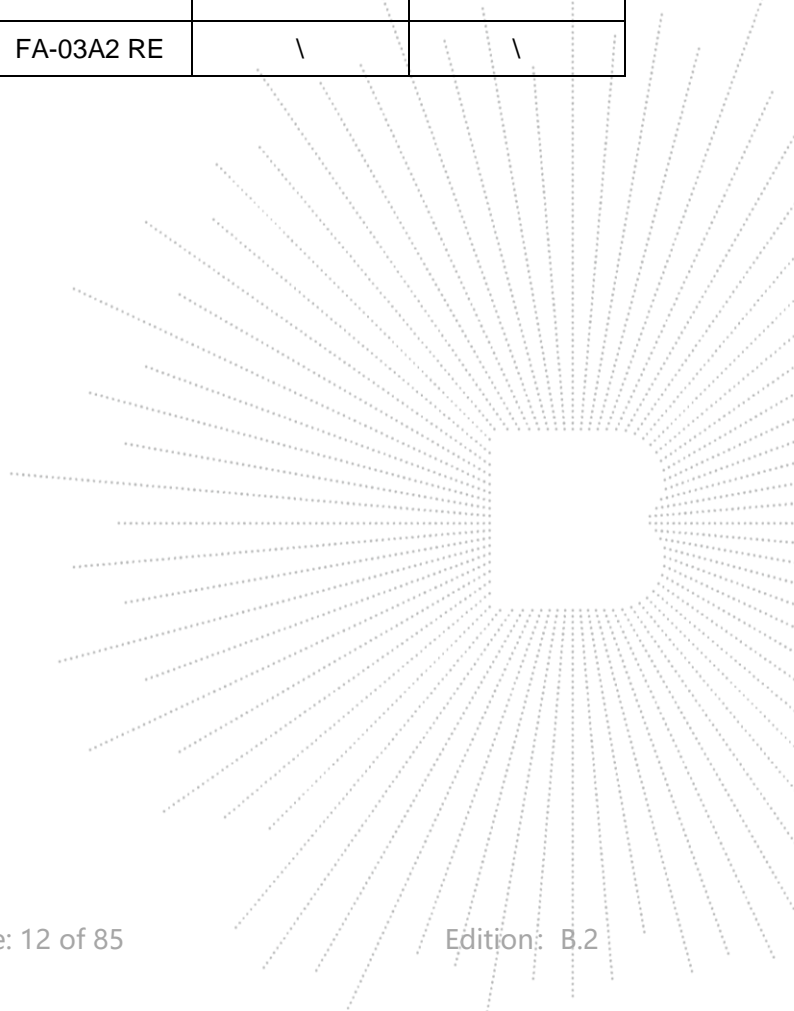

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

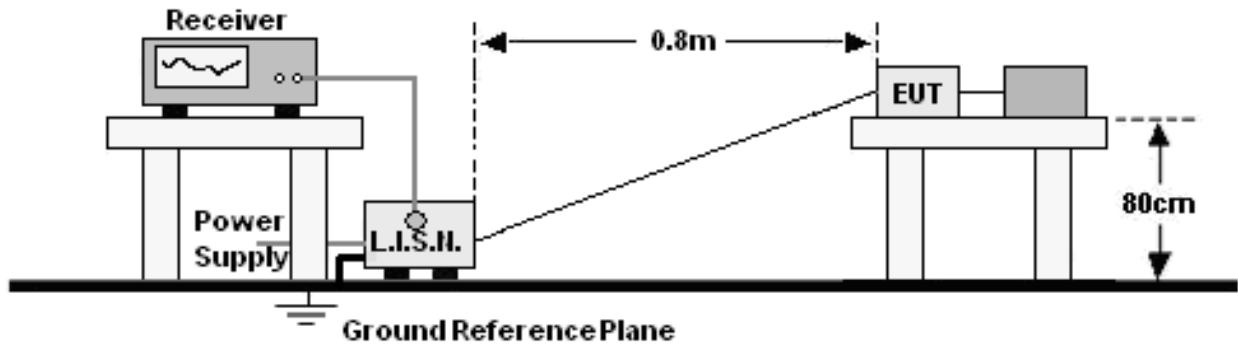

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.


6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

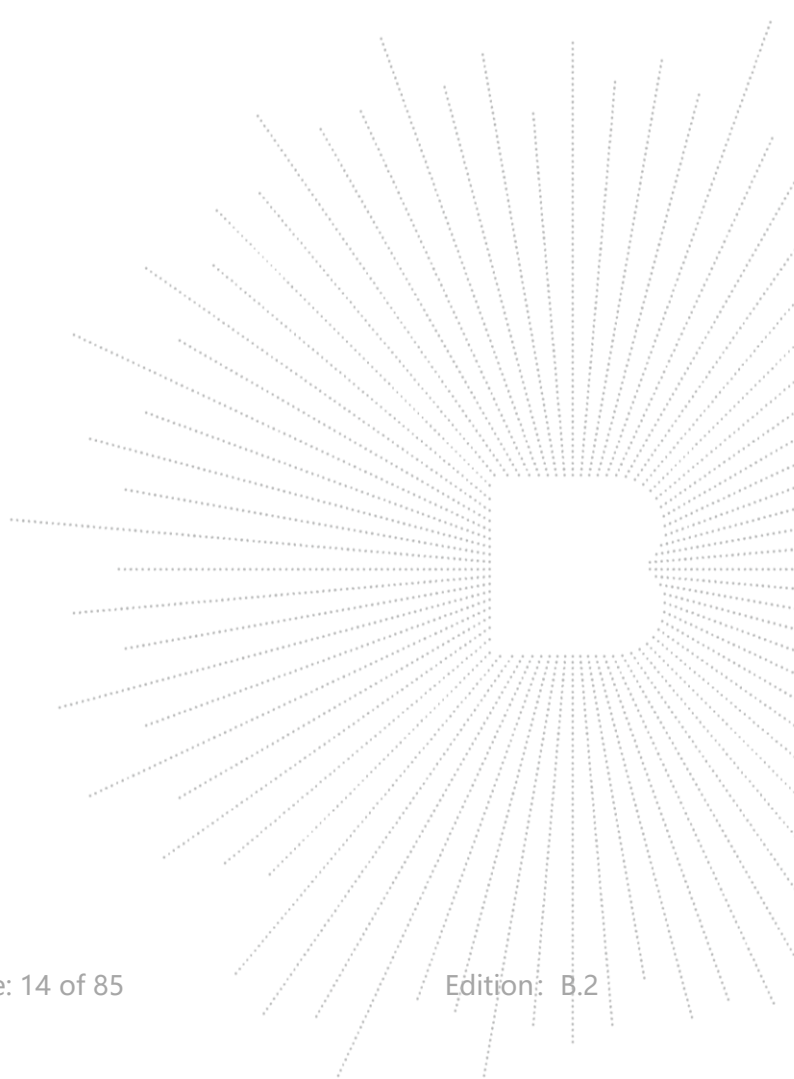

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 3	Test Voltage :	AC 120V/60Hz

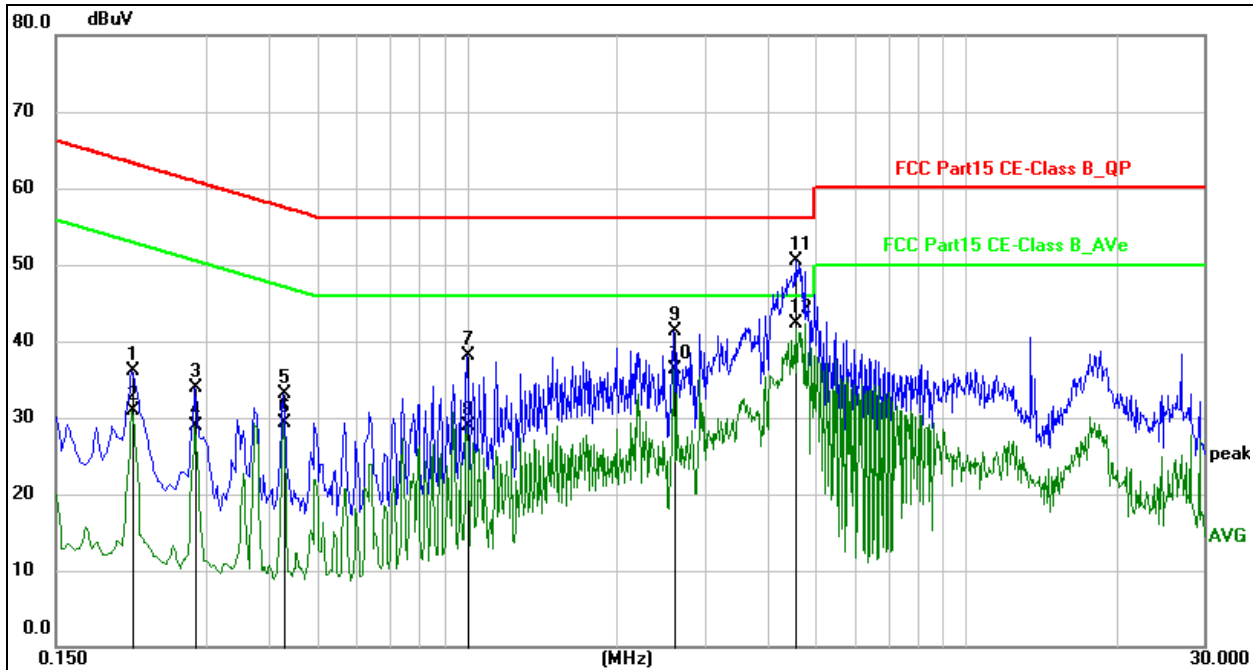


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2130	25.83	10.19	36.02	63.09	-27.07	QP
2	0.2130	20.75	10.19	30.94	53.09	-22.15	AVG
3	0.2850	23.77	10.19	33.96	60.67	-26.71	QP
4	0.2850	18.73	10.19	28.92	50.67	-21.75	AVG
5	0.4290	22.83	10.18	33.01	57.27	-24.26	QP
6	0.4290	19.14	10.18	29.32	47.27	-17.95	AVG
7	1.0005	27.95	10.21	38.16	56.00	-17.84	QP
8	1.0005	18.74	10.21	28.95	46.00	-17.05	AVG
9	2.6025	31.14	10.26	41.40	56.00	-14.60	QP
10	2.6025	26.11	10.26	36.37	46.00	-9.63	AVG
11	4.5510	40.16	10.41	50.57	56.00	-5.43	QP
12 *	4.5510	31.84	10.41	42.25	46.00	-3.75	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 3	Test Voltage :	AC 120V/60Hz

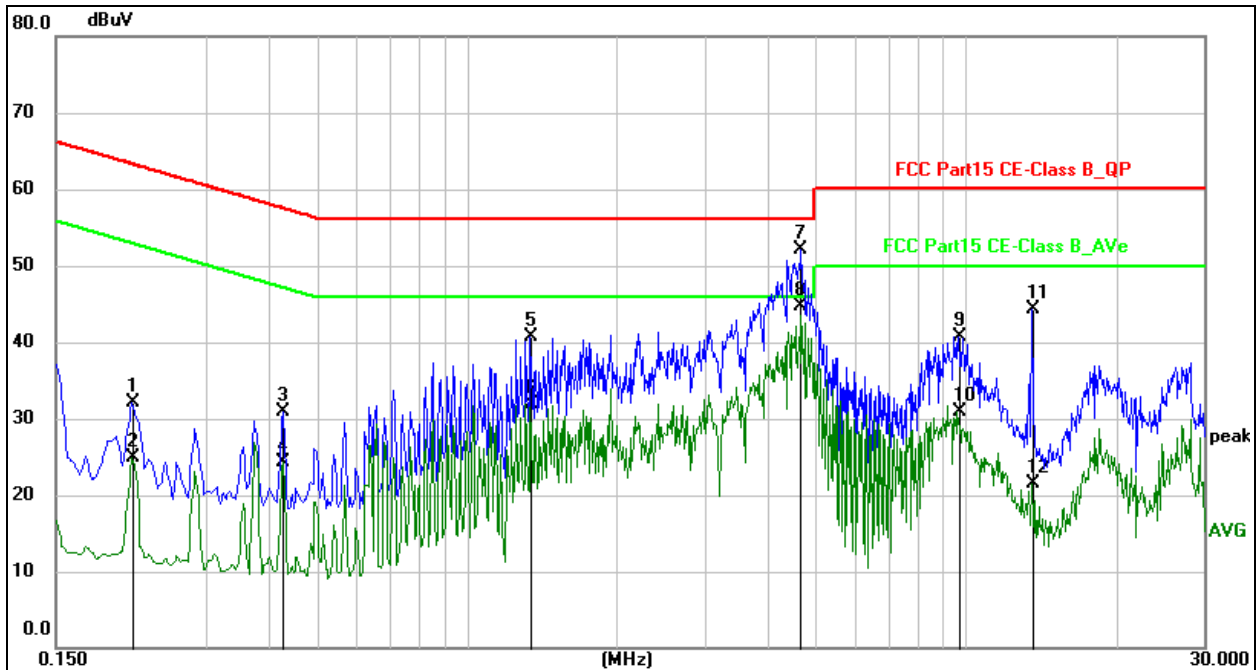
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2128	21.83	10.19	32.02	63.10	-31.08	QP
2	0.2128	14.69	10.19	24.88	53.10	-28.22	AVG
3	0.4282	20.73	10.18	30.91	57.29	-26.38	QP
4	0.4282	14.12	10.18	24.30	47.29	-22.99	AVG
5	1.3379	30.49	10.22	40.71	56.00	-15.29	QP
6	1.3379	21.78	10.22	32.00	46.00	-14.00	AVG
7	4.6715	41.64	10.41	52.05	56.00	-3.95	QP
8 *	4.6715	34.24	10.41	44.65	46.00	-1.35	AVG
9	9.6539	30.23	10.43	40.66	60.00	-19.34	QP
10	9.6539	20.47	10.43	30.90	50.00	-19.10	AVG
11	13.5509	33.90	10.41	44.31	60.00	-15.69	QP
12	13.5509	11.15	10.41	21.56	50.00	-28.44	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

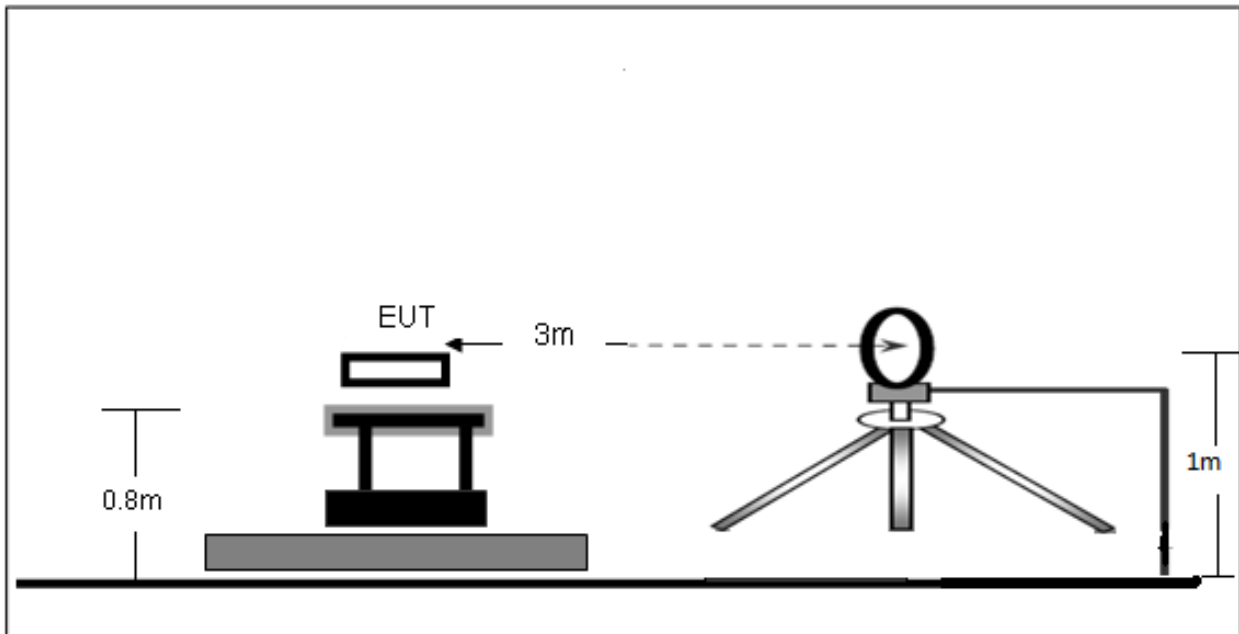

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

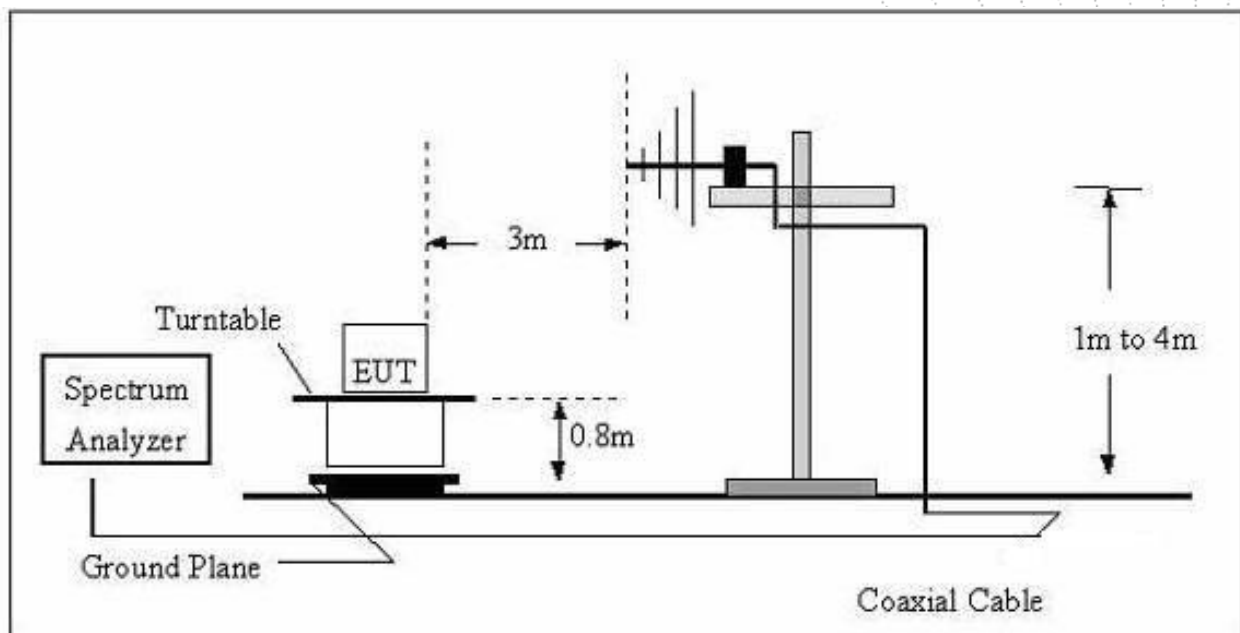

(C) Radiated Emission Test-Up Frequency Above 1GHz

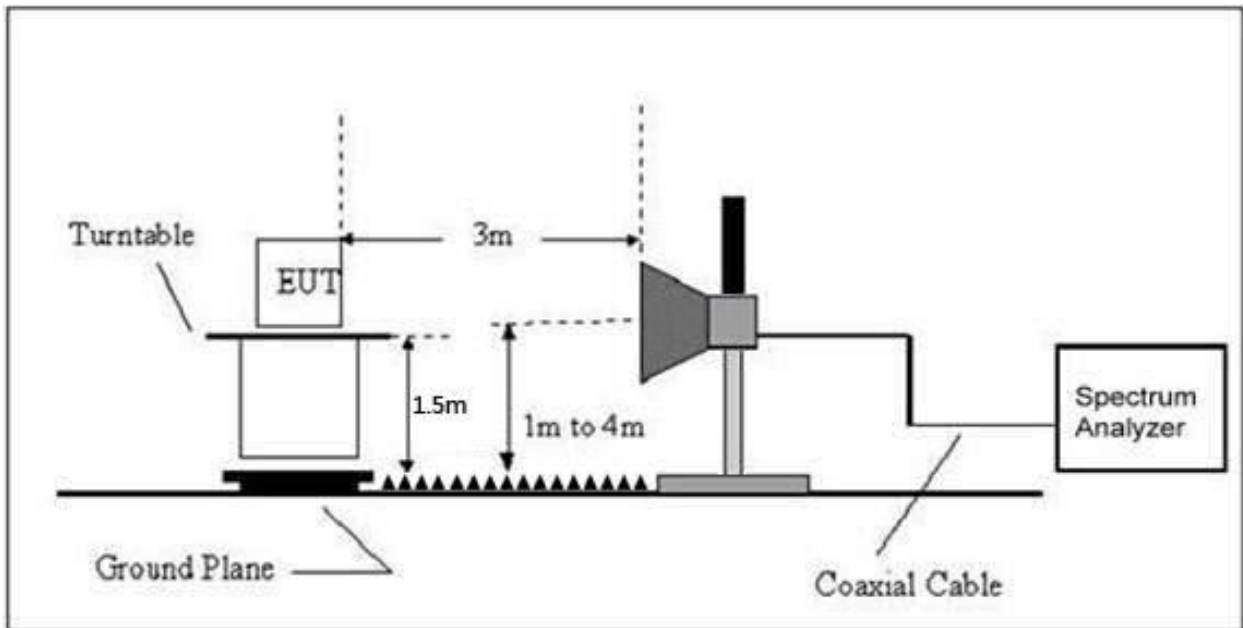

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage:	AC 120V/60HZ
Test Mode:	Mode 3	Polarization:	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})(dB)$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	24 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC 120V/60HZ
Test Mode:	Mode 3	Polarization :	Horizontal

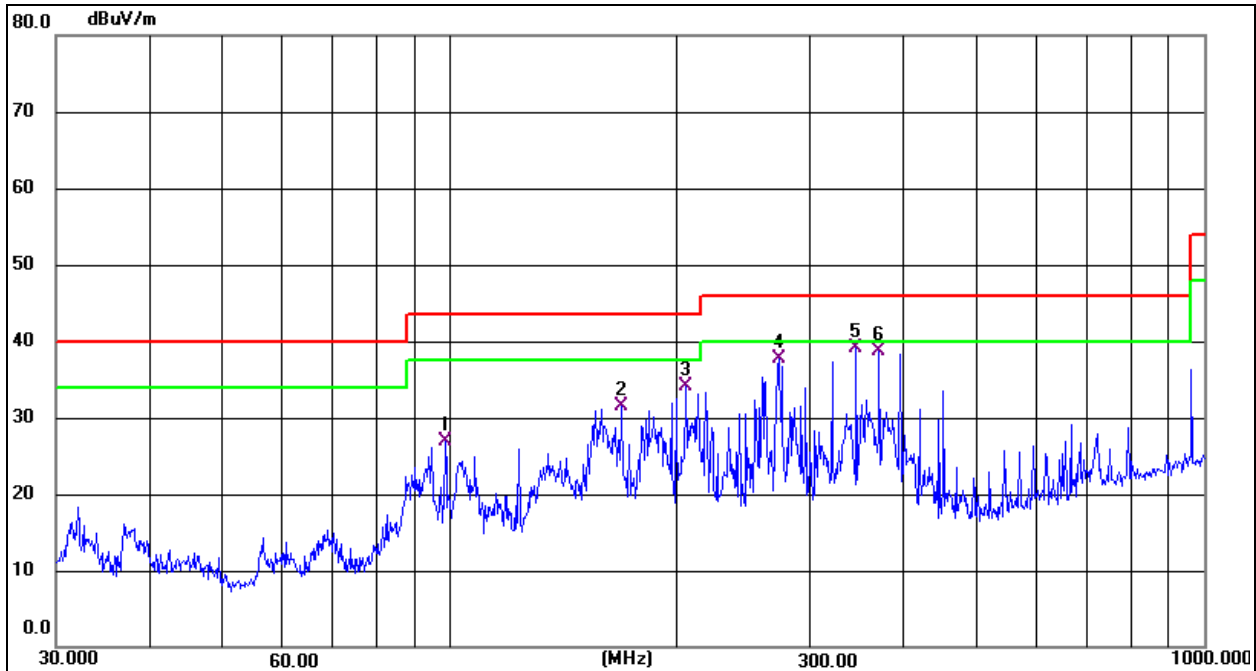


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	98.4866	45.76	-18.81	26.95	43.50	-16.55	QP
2	169.0054	47.11	-15.58	31.53	43.50	-11.97	QP
3	205.6751	51.52	-17.33	34.19	43.50	-9.31	QP
4	273.2341	52.39	-14.72	37.67	46.00	-8.33	QP
5 *	345.5952	51.11	-12.08	39.03	46.00	-6.97	QP
6	370.7023	50.00	-11.33	38.67	46.00	-7.33	QP

Temperature:	24 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC 120V/60HZ
Test Mode:	Mode 3	Polarization :	Vertical

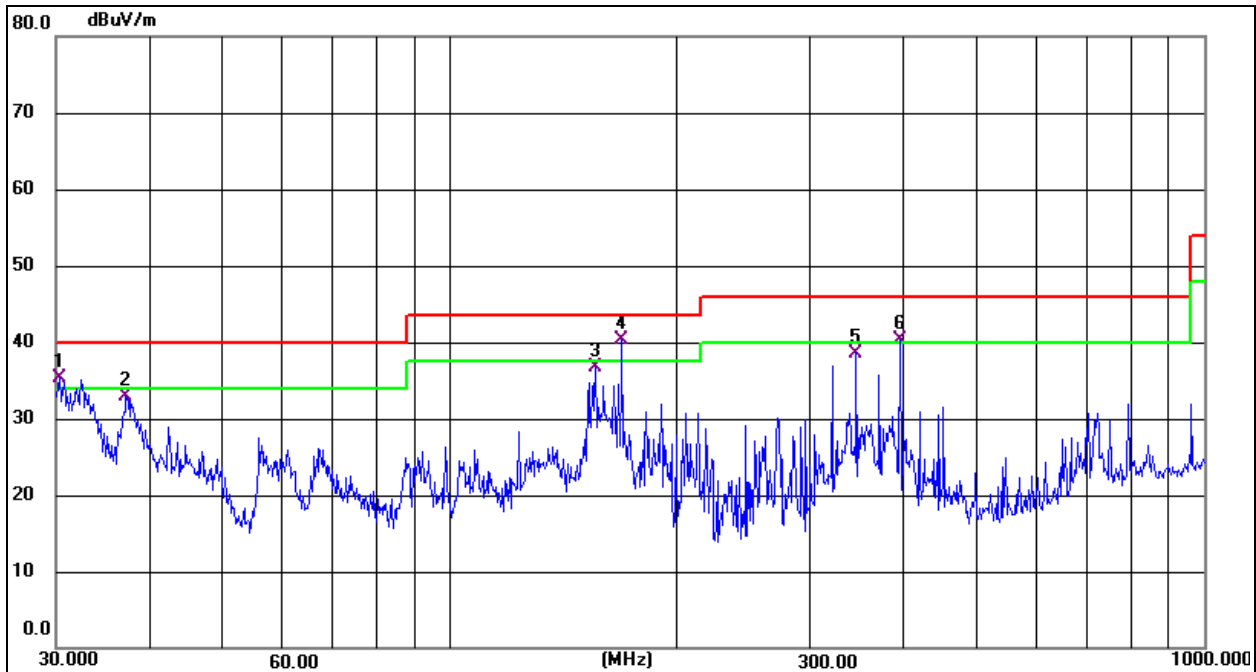
Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	30.3173	53.35	-18.07	35.28	40.00	-4.72	QP
2	37.1550	50.22	-17.25	32.97	40.00	-7.03	QP
3	155.9101	51.44	-14.75	36.69	43.50	-6.81	QP
4 *	169.0054	55.89	-15.58	40.31	43.50	-3.19	QP
5	345.5952	50.68	-12.08	38.60	46.00	-7.40	QP
6 !	394.8545	50.93	-10.62	40.31	46.00	-5.69	QP

Test Mode :	TX(5.1G) - 802.11a
-------------	--------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.064	73.08	-20.73	52.35	68.2	-15.85	Pk
Vertical	4434.064	59.21	-20.73	38.48	54	-15.52	AV
Vertical	10360.142	63.38	-9.36	54.02	68.2	-14.18	Pk
Vertical	10360.142	49.04	-9.36	39.68	54	-14.32	AV
Vertical	15540.174	64.31	-7.84	56.47	74	-17.53	Pk
Vertical	15540.174	49.05	-7.84	41.21	54	-12.79	AV
Horizontal	4434.075	70.36	-20.73	49.63	68.2	-18.57	Pk
Horizontal	4434.075	59.60	-20.73	38.87	54	-15.13	AV
Horizontal	10360.075	61.71	-9.36	52.35	68.2	-15.85	Pk
Horizontal	10360.075	49.43	-9.36	40.07	54	-13.93	AV
Horizontal	15540.093	60.89	-7.84	53.05	74	-20.95	Pk
Horizontal	15540.093	49.60	-7.84	41.76	54	-12.24	AV
middle Channel (5200 MHz)-Above 1G							
Vertical	4592.060	74.24	-20.42	53.83	74	-20.17	Pk
Vertical	4592.060	59.16	-20.42	38.75	54	-15.25	AV
Vertical	10400.097	60.84	-9.30	51.54	68.2	-16.66	Pk
Vertical	10400.097	49.61	-9.30	40.31	54	-13.69	AV
Vertical	15600.173	62.26	-7.82	54.44	74	-19.56	Pk
Vertical	15600.173	49.19	-7.82	41.37	54	-12.63	AV
Horizontal	4592.015	74.22	-20.42	53.80	74	-20.20	Pk
Horizontal	4592.015	59.70	-20.42	39.29	54	-14.71	AV
Horizontal	10400.152	60.91	-9.30	51.61	68.2	-16.59	Pk
Horizontal	10400.152	49.84	-9.30	40.54	54	-13.46	AV
Horizontal	15600.052	61.08	-7.82	53.26	74	-20.74	Pk
Horizontal	15600.052	49.18	-7.82	41.36	54	-12.64	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.089	72.31	-20.12	52.18	74	-21.82	Pk
Vertical	4739.089	59.50	-20.12	39.38	54	-14.62	AV
Vertical	10480.067	64.67	-9.18	55.49	68.2	-12.71	Pk
Vertical	10480.067	49.02	-9.18	39.84	54	-14.16	AV
Vertical	15720.025	63.28	-7.78	55.50	74	-18.50	Pk
Vertical	15720.025	49.91	-7.78	42.13	54	-11.87	AV
Horizontal	4739.033	73.71	-20.12	53.58	74	-20.42	Pk
Horizontal	4739.033	59.42	-20.12	39.30	54	-14.70	AV
Horizontal	10480.032	64.69	-9.18	55.51	68.2	-12.69	Pk
Horizontal	10480.032	49.85	-9.18	40.67	54	-13.33	AV
Horizontal	15720.121	63.30	-7.78	55.52	74	-18.48	Pk
Horizontal	15720.121	49.82	-7.78	42.04	54	-11.96	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11n-HT20
-------------	-------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.061	73.89	-20.73	53.16	68.2	-15.04	Pk
Vertical	4434.061	59.83	-20.73	39.09	54	-14.91	AV
Vertical	10360.083	61.60	-9.36	52.24	68.2	-15.96	Pk
Vertical	10360.083	49.50	-9.36	40.14	54	-13.86	AV
Vertical	15540.198	60.86	-7.84	53.02	74	-20.98	Pk
Vertical	15540.198	49.93	-7.84	42.09	54	-11.91	AV
Horizontal	4434.106	71.04	-20.73	50.31	68.2	-17.89	Pk
Horizontal	4434.106	59.45	-20.73	38.72	54	-15.28	AV
Horizontal	10360.109	60.96	-9.36	51.60	68.2	-16.60	Pk
Horizontal	10360.109	49.58	-9.36	40.22	54	-13.78	AV
Horizontal	15540.131	64.77	-7.84	56.93	74	-17.07	Pk
Horizontal	15540.131	49.28	-7.84	41.44	54	-12.56	AV
middle Channel (5200 MHz)-Above 1G							
Vertical	4592.134	70.49	-20.42	50.07	74	-23.93	Pk
Vertical	4592.134	59.96	-20.42	39.55	54	-14.45	AV
Vertical	10400.107	61.66	-9.30	52.36	68.2	-15.84	Pk
Vertical	10400.107	49.42	-9.30	40.12	54	-13.88	AV
Vertical	15600.154	61.77	-7.82	53.95	74	-20.05	Pk
Vertical	15600.154	49.60	-7.82	41.78	54	-12.22	AV
Horizontal	4592.102	71.05	-20.42	50.64	74	-23.36	Pk
Horizontal	4592.102	59.92	-20.42	39.50	54	-14.50	AV
Horizontal	10400.111	60.21	-9.30	50.91	68.2	-17.29	Pk
Horizontal	10400.111	49.22	-9.30	39.92	54	-14.08	AV
Horizontal	15600.177	62.77	-7.82	54.95	74	-19.05	Pk
Horizontal	15600.177	49.02	-7.82	41.20	54	-12.80	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.037	71.48	-20.12	51.36	74	-22.64	Pk
Vertical	4739.037	59.39	-20.12	39.27	54	-14.73	AV
Vertical	10480.026	64.16	-9.18	54.98	68.2	-13.22	Pk
Vertical	10480.026	49.90	-9.18	40.72	54	-13.28	AV
Vertical	15720.039	62.31	-7.78	54.53	74	-19.47	Pk
Vertical	15720.039	49.14	-7.78	41.36	54	-12.64	AV
Horizontal	4739.114	70.93	-20.12	50.80	74	-23.20	Pk
Horizontal	4739.114	59.09	-20.12	38.97	54	-15.03	AV
Horizontal	10480.103	63.34	-9.18	54.16	68.2	-14.04	Pk
Horizontal	10480.103	49.17	-9.18	39.99	54	-14.01	AV
Horizontal	15720.068	63.44	-7.78	55.66	74	-18.34	Pk
Horizontal	15720.068	49.28	-7.78	41.50	54	-12.50	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11n-HT40
-------------	-------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.123	71.11	-20.73	50.38	68.2	-17.82	Pk
Vertical	4434.123	59.65	-20.73	38.91	54	-15.09	AV
Vertical	10380.042	63.12	-9.33	53.79	68.2	-14.41	Pk
Vertical	10380.042	49.51	-9.33	40.18	54	-13.82	AV
Vertical	15570.125	61.40	-7.83	53.57	74	-20.43	Pk
Vertical	15570.125	49.30	-7.83	41.47	54	-12.53	AV
Horizontal	4434.035	72.32	-20.73	51.59	74	-22.41	Pk
Horizontal	4434.035	59.48	-20.73	38.75	54	-15.25	AV
Horizontal	10380.069	64.65	-9.33	55.32	68.2	-12.88	Pk
Horizontal	10380.069	49.47	-9.33	40.14	54	-13.86	AV
Horizontal	15570.179	62.50	-7.83	54.67	74	-19.33	Pk
Horizontal	15570.179	49.13	-7.83	41.30	54	-12.70	AV
High Channel (5230 MHz)-Above 1G							
Vertical	4739.126	72.62	-20.12	52.50	68.2	-15.70	Pk
Vertical	4739.126	59.43	-20.12	39.31	54	-14.69	AV
Vertical	10460.008	62.71	-9.21	53.50	68.2	-14.70	Pk
Vertical	10460.008	49.45	-9.21	40.24	54	-13.76	AV
Vertical	15690.125	63.96	-7.79	56.17	74	-17.83	Pk
Vertical	15690.125	49.96	-7.79	42.17	54	-11.83	AV
Horizontal	4739.030	70.09	-20.12	49.96	68.2	-18.24	Pk
Horizontal	4739.030	59.29	-20.12	39.16	54	-14.84	AV
Horizontal	10460.191	62.71	-9.21	53.50	68.2	-14.70	Pk
Horizontal	10460.191	49.02	-9.21	39.81	54	-14.19	AV
Horizontal	15690.143	62.64	-7.79	54.85	74	-19.15	Pk
Horizontal	15690.143	49.05	-7.79	41.26	54	-12.74	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.153	72.28	-20.73	51.55	68.2	-16.65	Pk
Vertical	4434.153	59.30	-20.73	38.57	54	-15.43	AV
Vertical	10360.054	63.33	-9.36	53.97	68.2	-14.23	Pk
Vertical	10360.054	49.65	-9.36	40.29	54	-13.71	AV
Vertical	15540.079	63.73	-7.84	55.89	74	-18.11	Pk
Vertical	15540.079	49.78	-7.84	41.94	54	-12.06	AV
Horizontal	4434.102	71.88	-20.73	51.15	68.2	-17.05	Pk
Horizontal	4434.102	59.31	-20.73	38.57	54	-15.43	AV
Horizontal	10360.161	61.99	-9.36	52.63	68.2	-15.57	Pk
Horizontal	10360.161	49.65	-9.36	40.29	54	-13.71	AV
Horizontal	15540.114	63.13	-7.84	55.29	74	-18.71	Pk
Horizontal	15540.114	49.79	-7.84	41.95	54	-12.05	AV
middle Channel (5200 MHz)-Above 1G							
Vertical	4592.085	74.96	-20.42	54.54	74	-19.46	Pk
Vertical	4592.085	59.66	-20.42	39.24	54	-14.76	AV
Vertical	10400.113	60.17	-9.30	50.87	68.2	-17.33	Pk
Vertical	10400.113	49.35	-9.30	40.05	54	-13.95	AV
Vertical	15600.113	61.19	-7.82	53.37	74	-20.63	Pk
Vertical	15600.113	49.28	-7.82	41.46	54	-12.54	AV
Horizontal	4592.029	70.98	-20.42	50.57	74	-23.43	Pk
Horizontal	4592.029	59.54	-20.42	39.12	54	-14.88	AV
Horizontal	10400.151	62.53	-9.30	53.23	68.2	-14.97	Pk
Horizontal	10400.151	49.55	-9.30	40.25	54	-13.75	AV
Horizontal	15600.177	64.24	-7.82	56.42	74	-17.58	Pk
Horizontal	15600.177	49.50	-7.82	41.68	54	-12.32	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.074	74.24	-20.12	54.12	74	-19.88	Pk
Vertical	4739.074	59.83	-20.12	39.71	54	-14.29	AV
Vertical	10480.014	62.92	-9.18	53.74	68.2	-14.46	Pk
Vertical	10480.014	49.78	-9.18	40.60	54	-13.40	AV
Vertical	15720.111	63.18	-7.78	55.40	74	-18.60	Pk
Vertical	15720.111	49.28	-7.78	41.50	54	-12.50	AV
Horizontal	4739.120	74.96	-20.12	54.84	74	-19.16	Pk
Horizontal	4739.120	59.72	-20.12	39.59	54	-14.41	AV
Horizontal	10480.137	64.02	-9.18	54.84	68.2	-13.36	Pk
Horizontal	10480.137	49.68	-9.18	40.50	54	-13.50	AV
Horizontal	15720.037	61.06	-7.78	53.28	74	-20.72	Pk
Horizontal	15720.037	49.99	-7.78	42.21	54	-11.79	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.064	72.26	-20.73	51.53	68.2	-16.67	Pk
Vertical	4434.064	59.90	-20.73	39.17	54	-14.83	AV
Vertical	10380.035	61.95	-9.33	52.62	68.2	-15.58	Pk
Vertical	10380.035	49.66	-9.33	40.33	54	-13.67	AV
Vertical	15570.050	62.45	-7.83	54.62	74	-19.38	Pk
Vertical	15570.050	49.32	-7.83	41.49	54	-12.51	AV
Horizontal	4434.127	70.67	-20.73	49.94	74	-24.06	Pk
Horizontal	4434.127	59.98	-20.73	39.24	54	-14.76	AV
Horizontal	10380.019	64.15	-9.33	54.82	68.2	-13.38	Pk
Horizontal	10380.019	49.07	-9.33	39.74	54	-14.26	AV
Horizontal	15570.112	63.66	-7.83	55.83	74	-18.17	Pk
Horizontal	15570.112	49.22	-7.83	41.39	54	-12.61	AV
middle Channel (5230 MHz)-Above 1G							
Vertical	4739.075	73.12	-20.12	53.00	68.2	-15.20	Pk
Vertical	4739.075	59.65	-20.12	39.53	54	-14.47	AV
Vertical	10460.151	62.06	-9.21	52.85	68.2	-15.35	Pk
Vertical	10460.151	49.49	-9.21	40.28	54	-13.72	AV
Vertical	15690.011	63.84	-7.79	56.05	74	-17.95	Pk
Vertical	15690.011	49.55	-7.79	41.76	54	-12.24	AV
Horizontal	4739.180	73.85	-20.12	53.73	68.2	-14.47	Pk
Horizontal	4739.180	59.30	-20.12	39.17	54	-14.83	AV
Horizontal	10460.040	61.19	-9.21	51.98	68.2	-16.22	Pk
Horizontal	10460.040	49.52	-9.21	40.31	54	-13.69	AV
Horizontal	15690.107	64.55	-7.79	56.76	74	-17.24	Pk
Horizontal	15690.107	49.03	-7.79	41.24	54	-12.76	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT80
------------	--------------------------


Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5210 MHz)-Above 1G							
Vertical	4679.145	70.97	-20.24	50.73	74	-23.27	Pk
Vertical	4679.145	59.96	-20.24	39.72	54	-14.28	AV
Vertical	11550.018	60.50	-8.84	51.66	74	-22.34	Pk
Vertical	11550.018	49.15	-8.84	40.31	54	-13.69	AV
Vertical	17325.138	56.23	-2.68	53.55	68.2	-14.65	Pk
Vertical	17325.138	44.90	-2.68	42.22	54	-11.78	AV
Horizontal	4679.024	70.85	-20.24	50.61	74	-23.39	Pk
Horizontal	4679.024	59.45	-20.24	39.21	54	-14.79	AV
Horizontal	11550.095	61.32	-8.84	52.48	74	-21.52	Pk
Horizontal	11550.095	49.90	-8.84	41.06	54	-12.94	AV
Horizontal	17325.149	57.39	-2.68	54.71	68.2	-13.49	Pk
Horizontal	17325.149	44.60	-2.68	41.92	54	-12.08	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

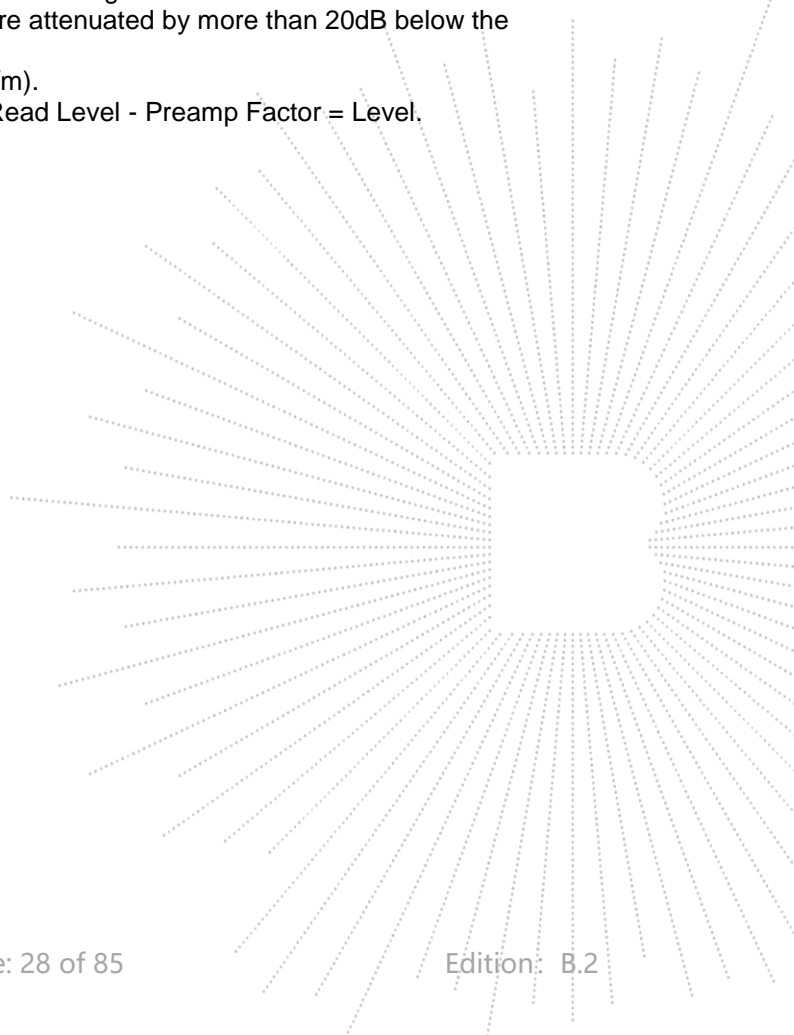

- Undesirable radiated Undesirable radiated Spurious Emission in Band Edge
- All the modes 802.11a/n/ac has been tested and the worst result 802.11n20 recorded as below:


Test mode: 802.11n20 Frequency(MHz): 5180



Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5149.625	H	67.19	74	48.59	54
5147.669	V	55.40	74	43.21	54

Test mode: 802.11n20 Frequency(MHz): 5240

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5366.406	H	55.96	74	45.21	54
5356.294	V	57.98	74	45.39	54


- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor.
 (3) Correct Factor= Ant_F + Cab_L - Preamp

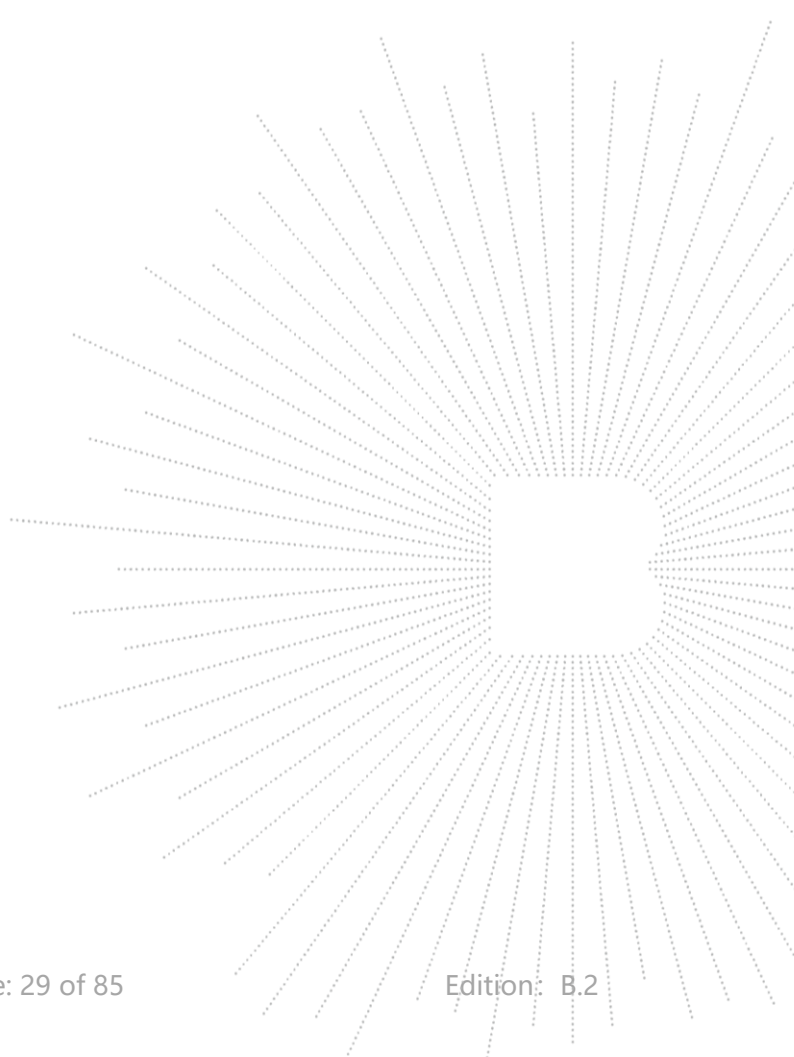

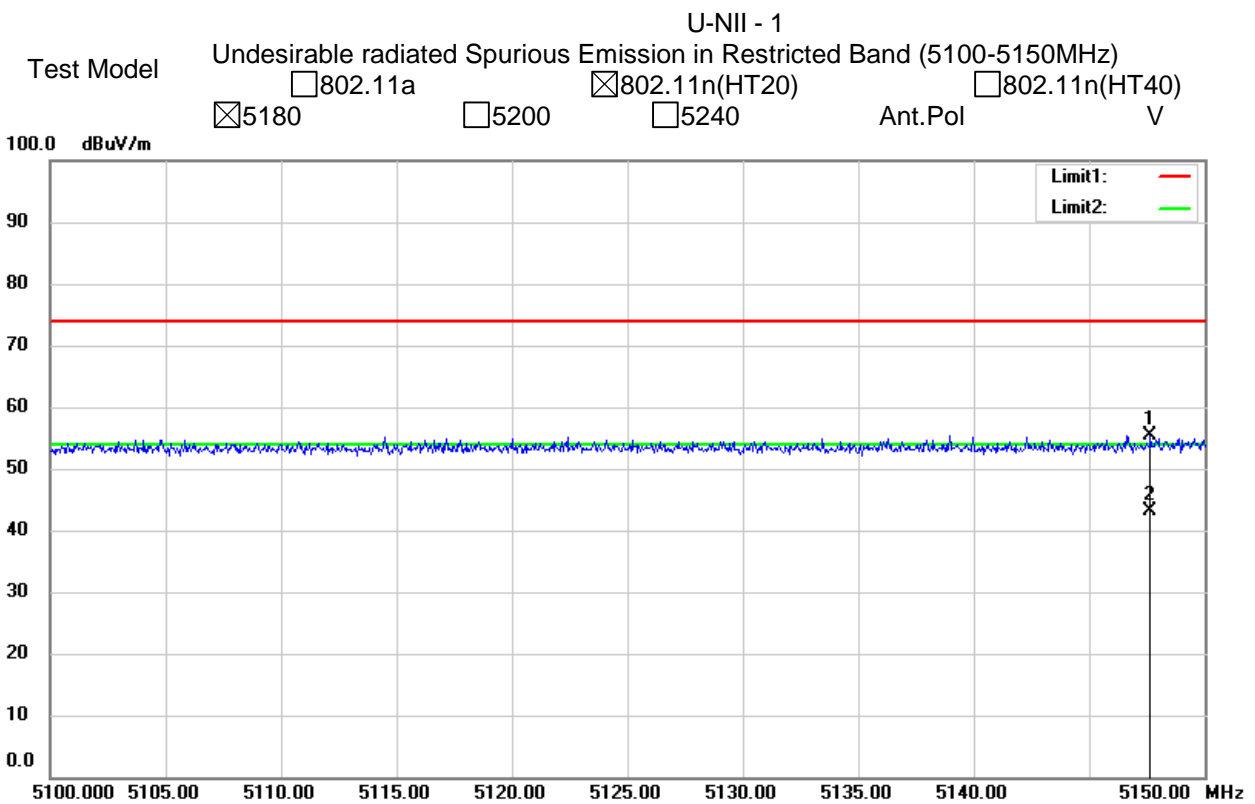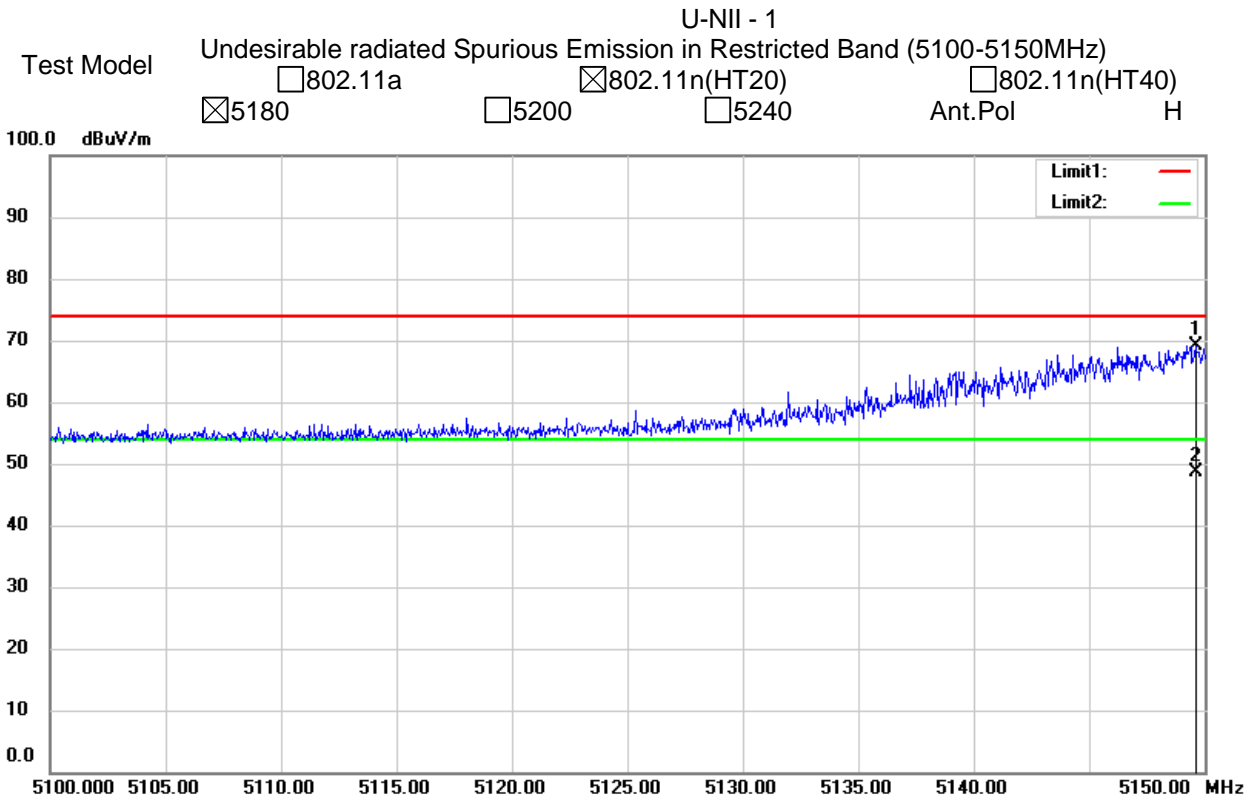


U-NII - 1

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)
 802.11a 802.11n(HT20) 802.11n(HT40)
 5180 5200 5240 Ant. Pol H

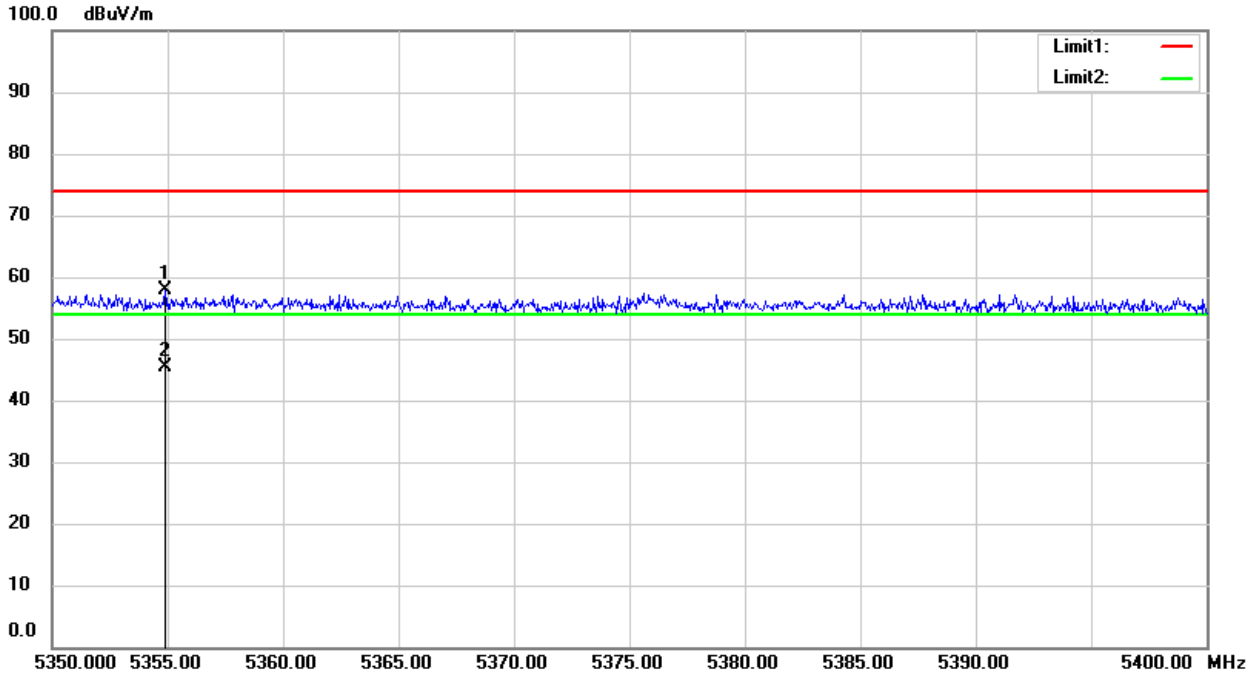

U-NII - 1

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)
 802.11a 802.11n(HT20) 802.11n(HT40)
 5180 5200 5240 Ant. Pol V

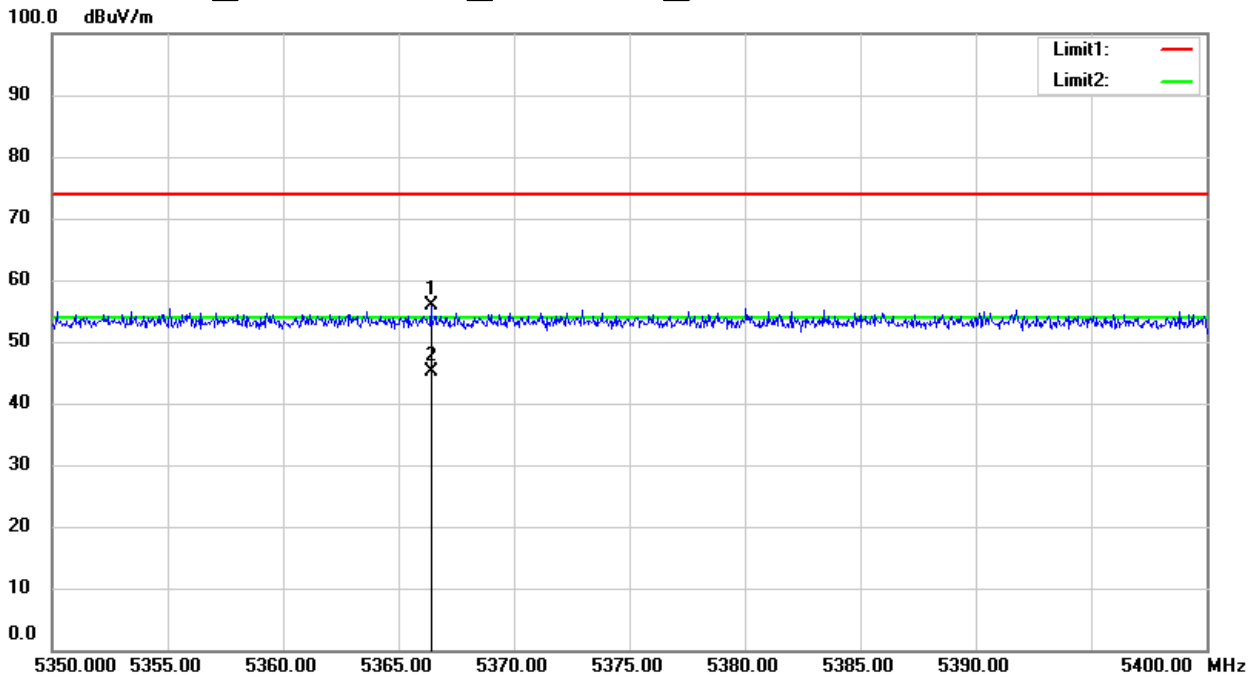

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test Procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

8.4 EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


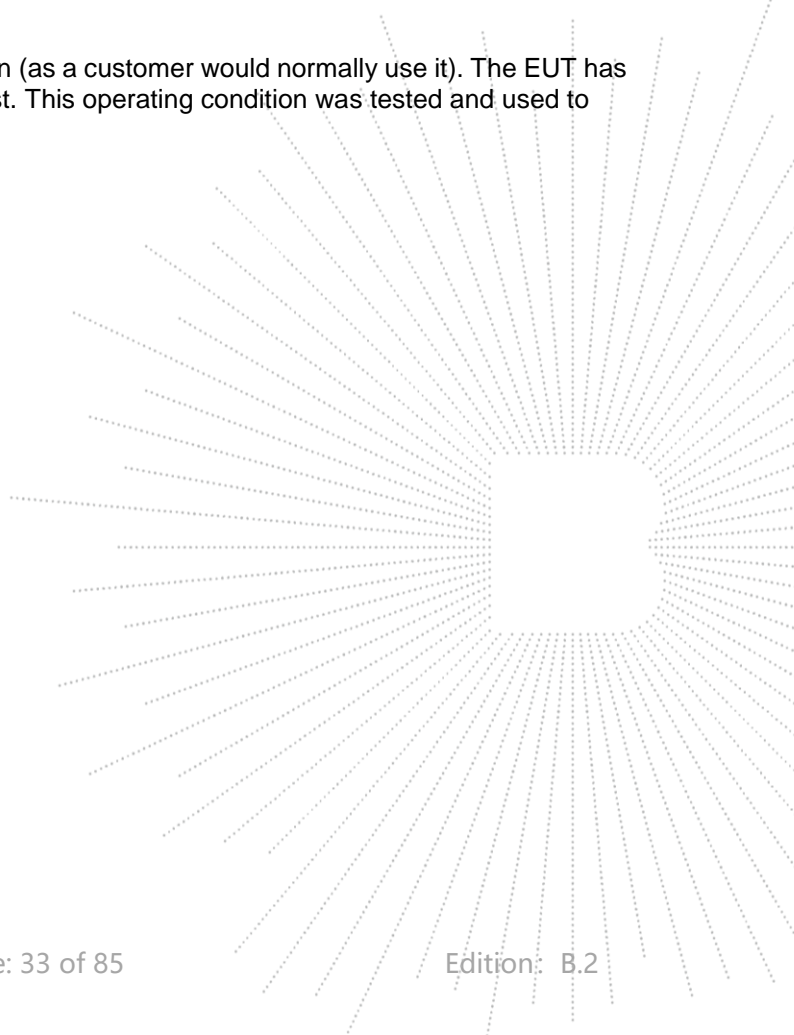




8.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60HZ
Test Mode:	(5180-5240MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	2.24	11	Pass
NVNT	a	5200	1.78	11	Pass
NVNT	a	5240	2.04	11	Pass
NVNT	n20	5180	1.55	11	Pass
NVNT	n20	5200	1.24	11	Pass
NVNT	n20	5240	1.76	11	Pass
NVNT	n40	5190	-2.24	11	Pass
NVNT	n40	5230	1.24	11	Pass
NVNT	ac20	5180	1.09	11	Pass
NVNT	ac20	5200	1.34	11	Pass
NVNT	ac20	5240	1.09	11	Pass
NVNT	ac40	5190	-1.25	11	Pass
NVNT	ac40	5230	-1.63	11	Pass
NVNT	ac80	5210	-5.1	11	Pass


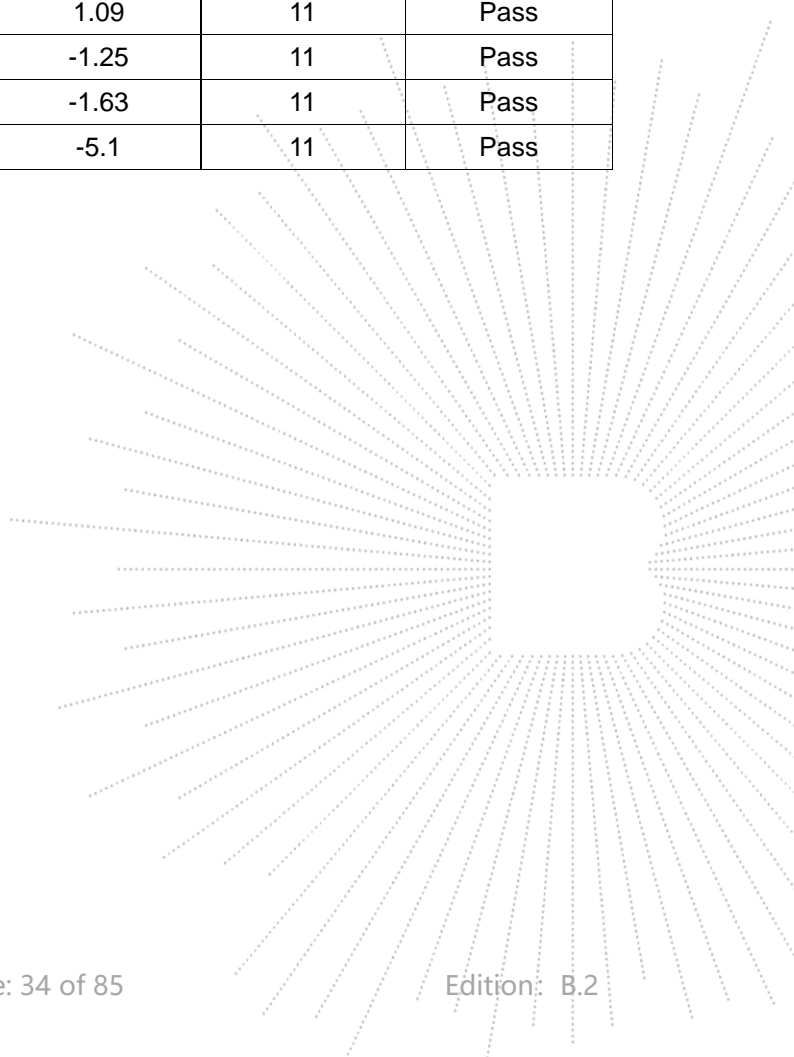


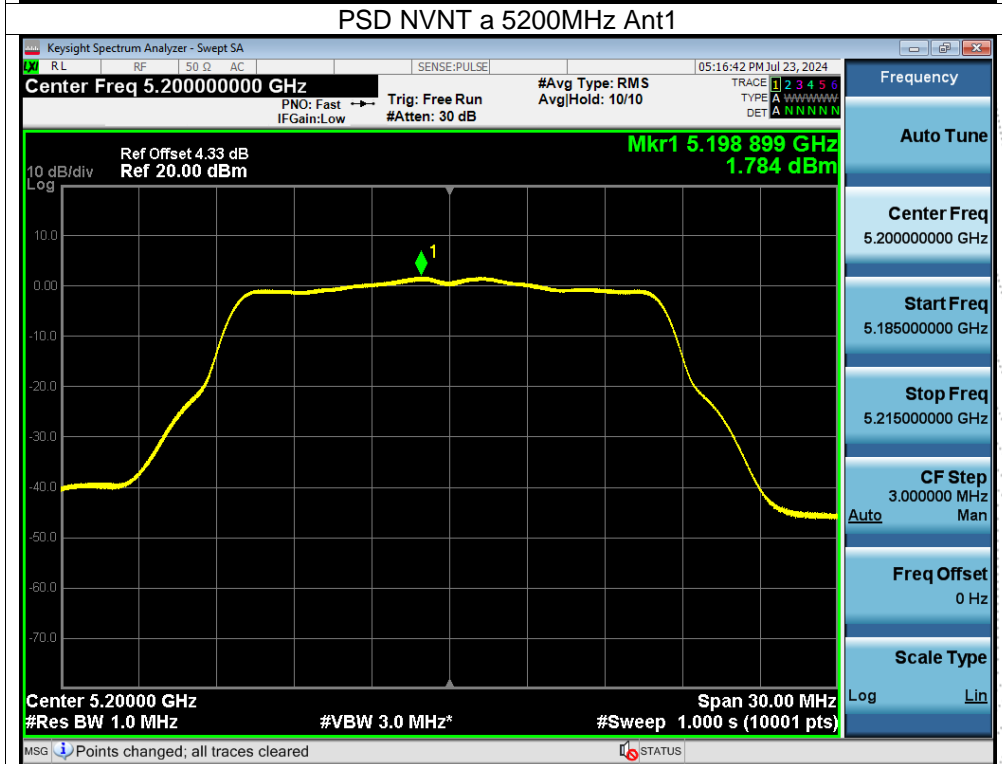
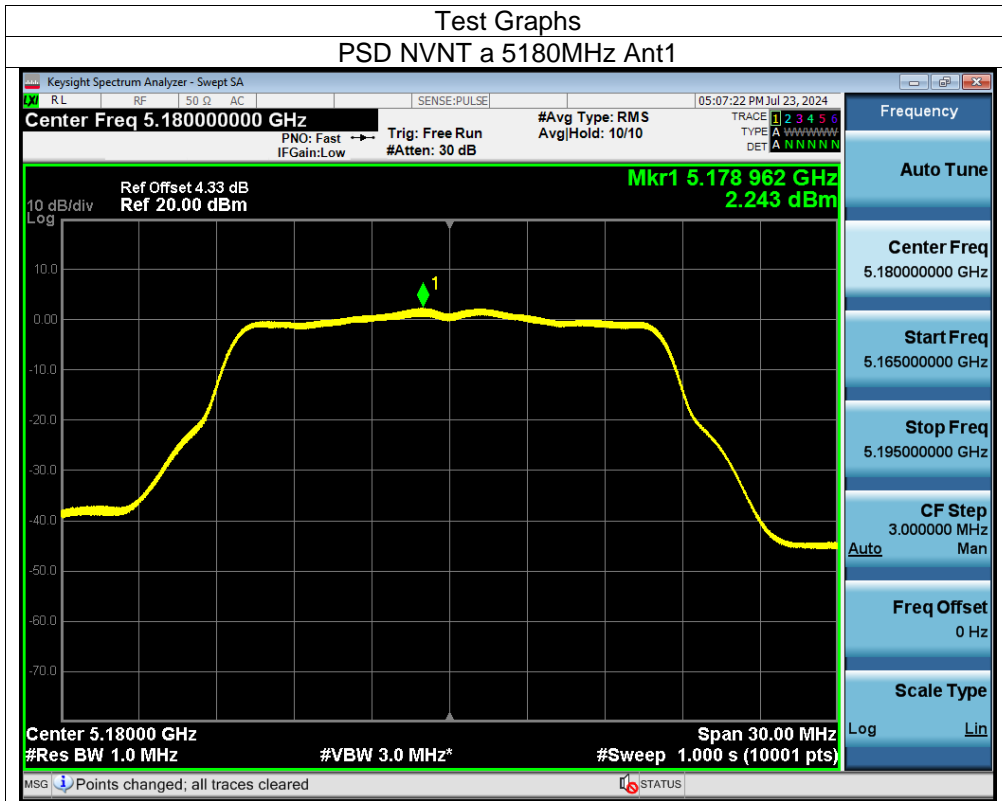


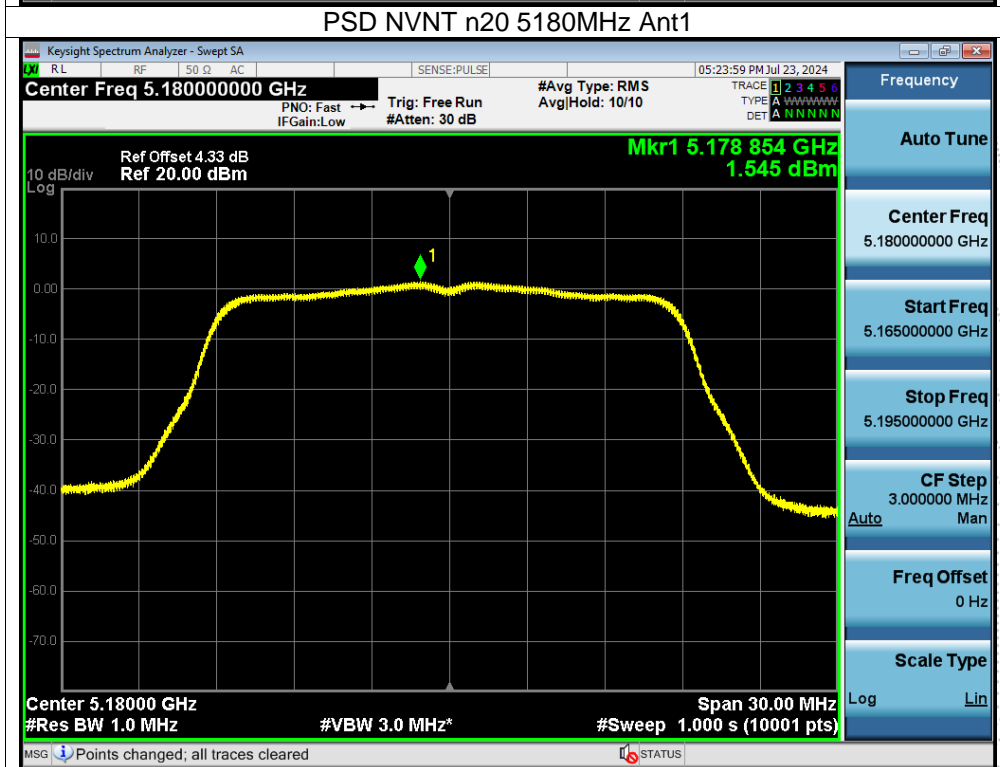
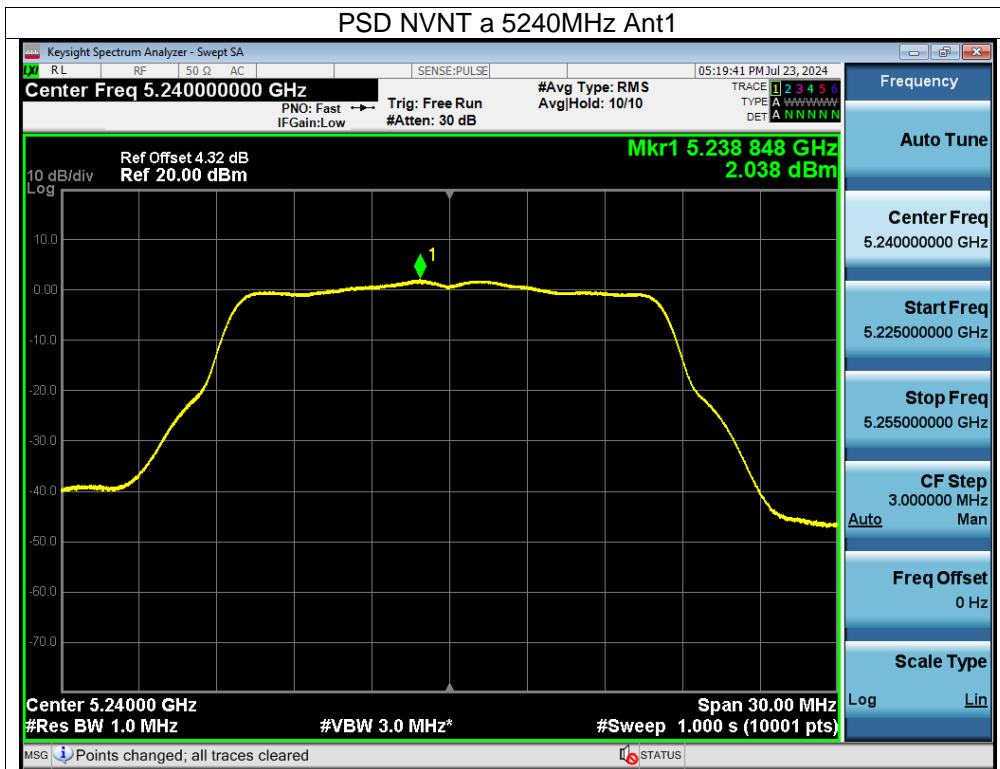


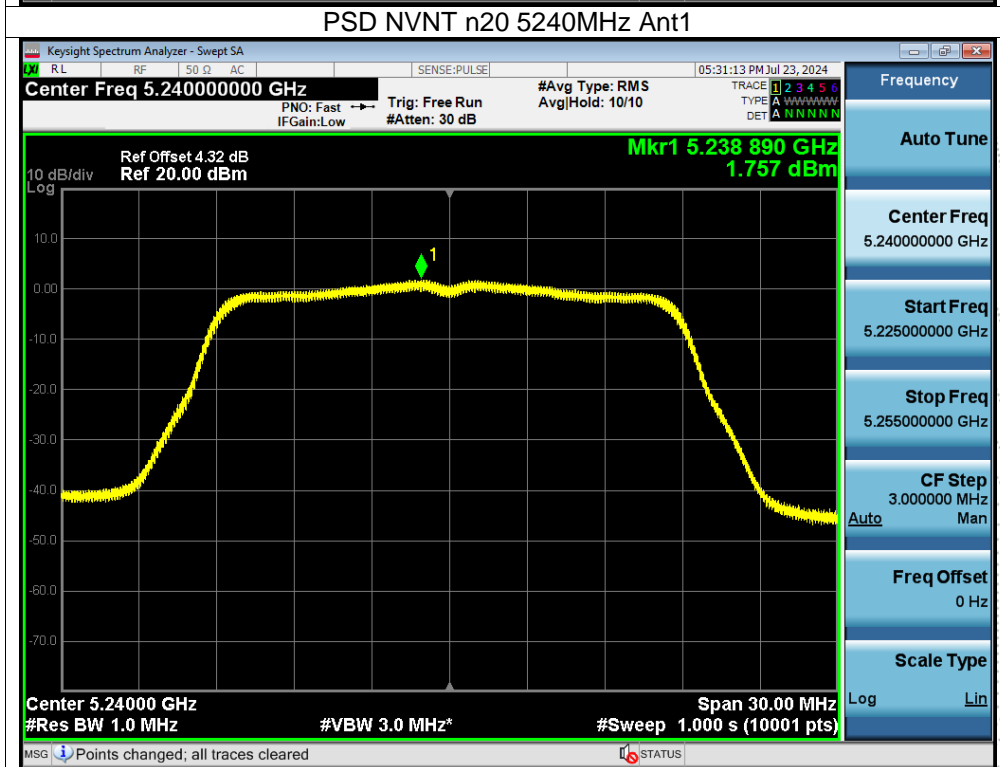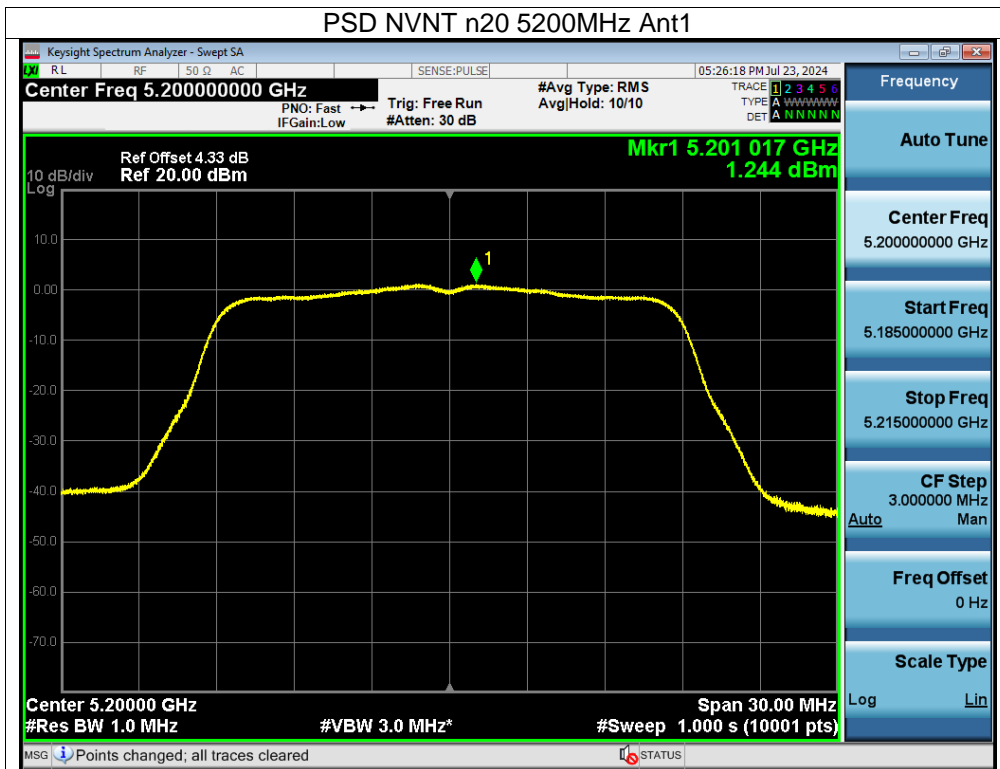

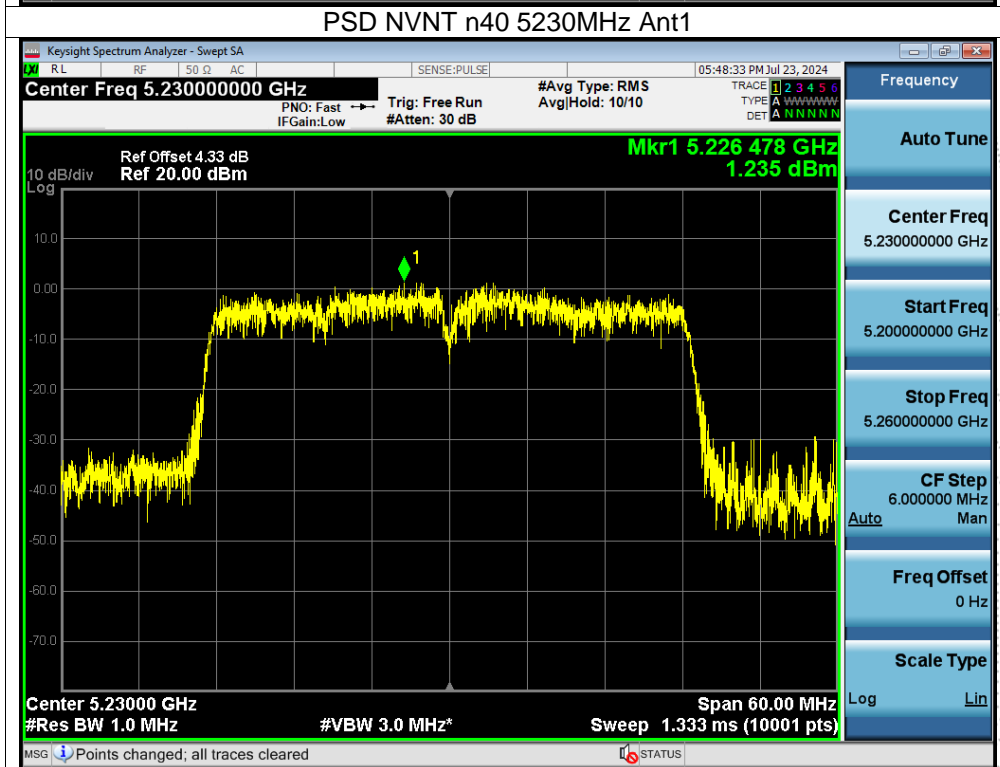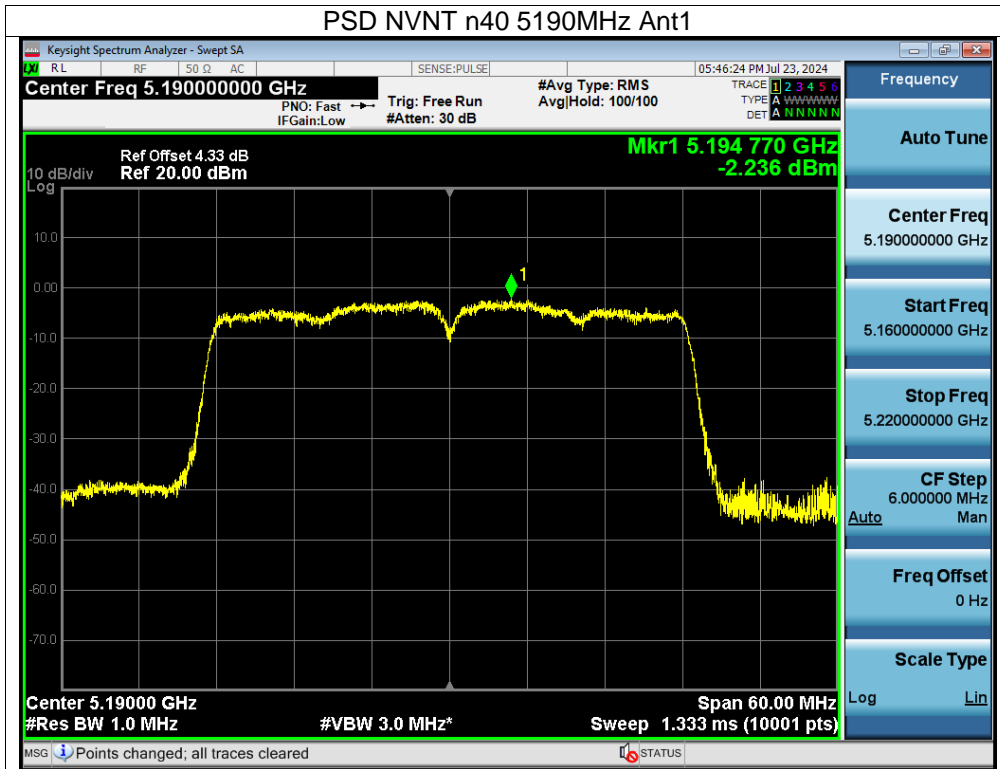

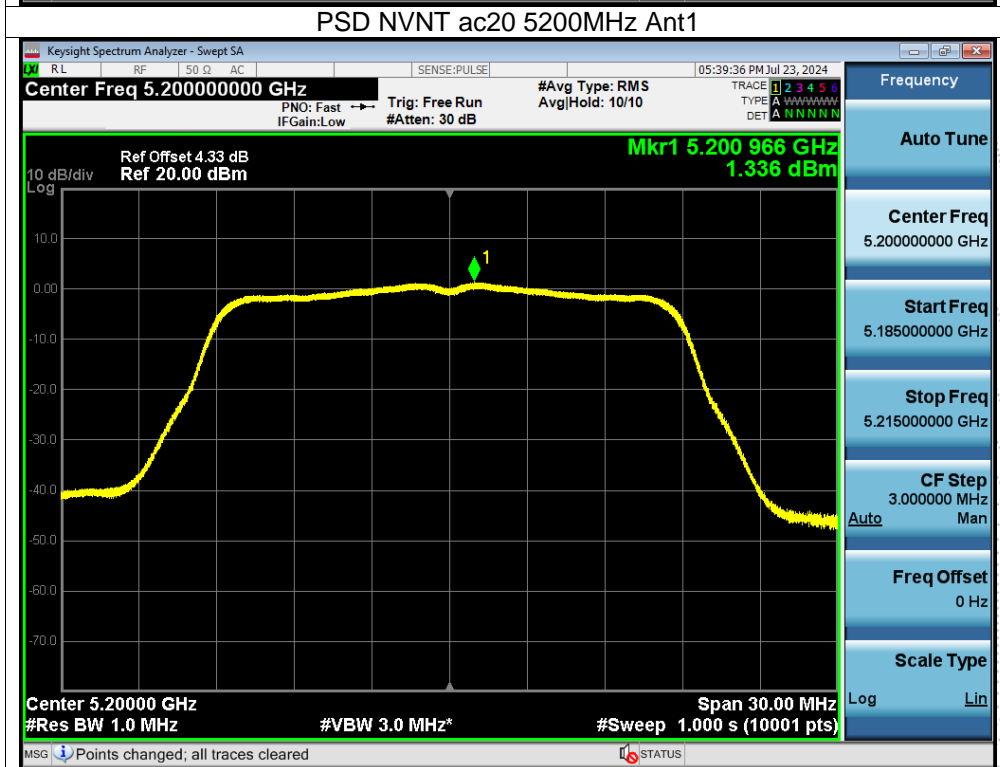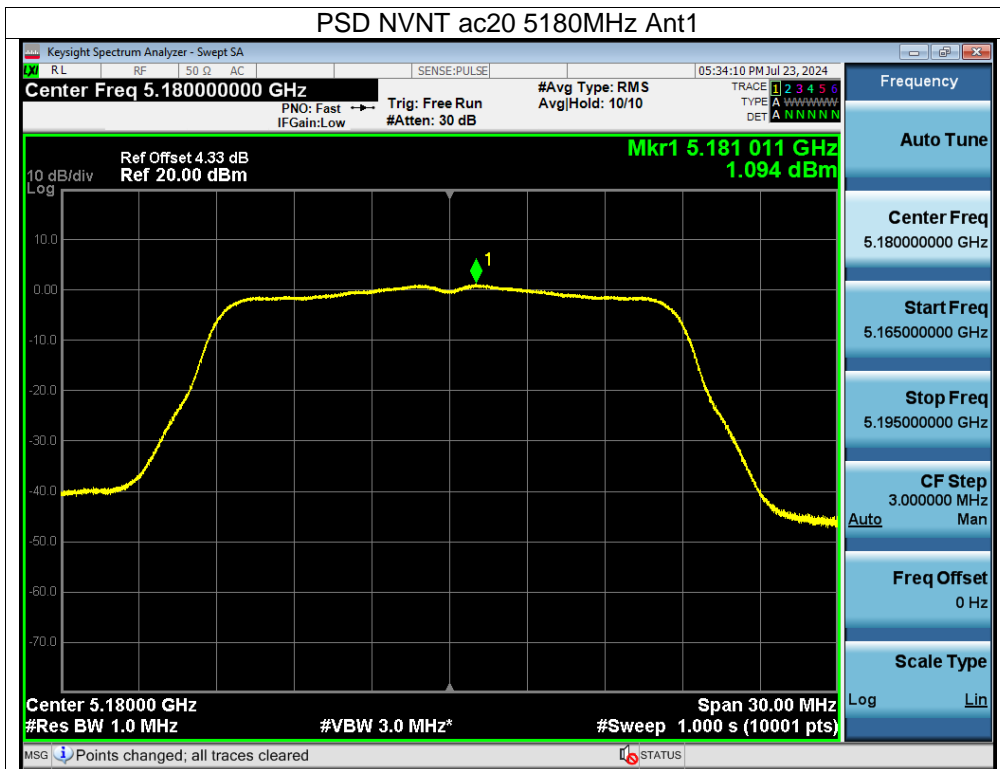


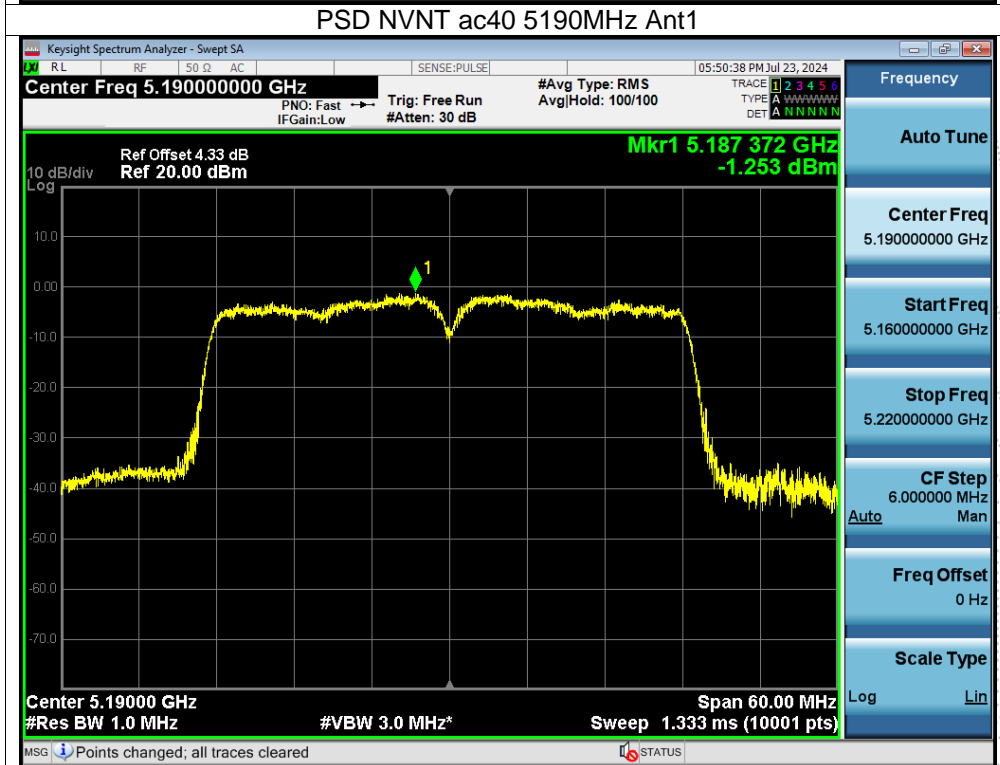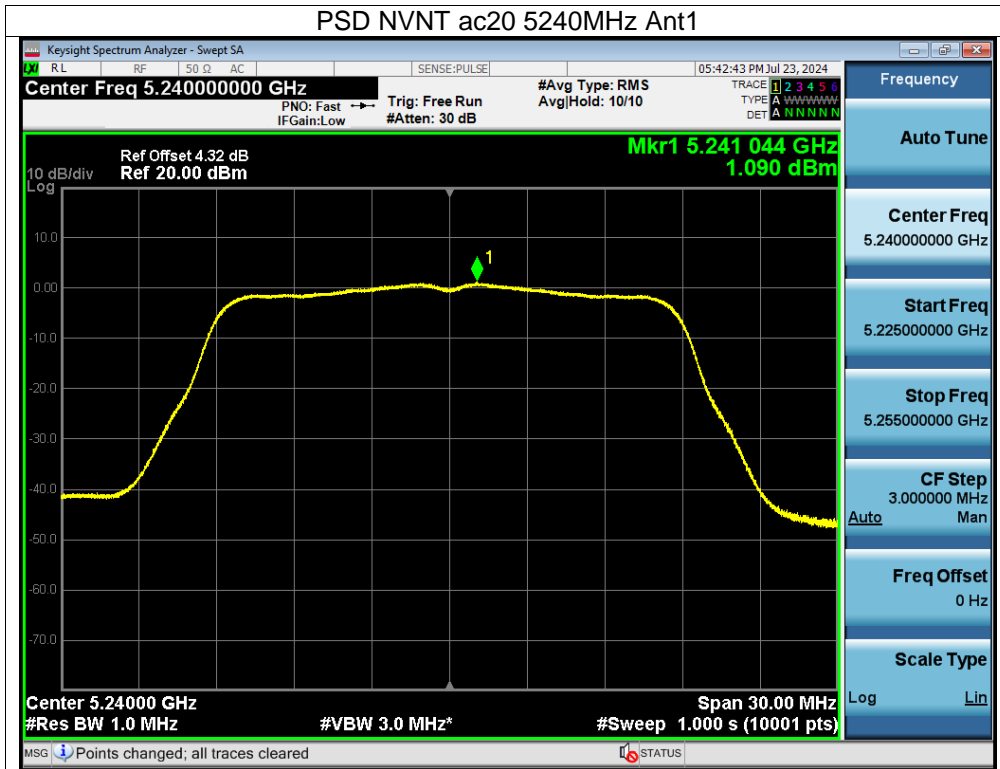

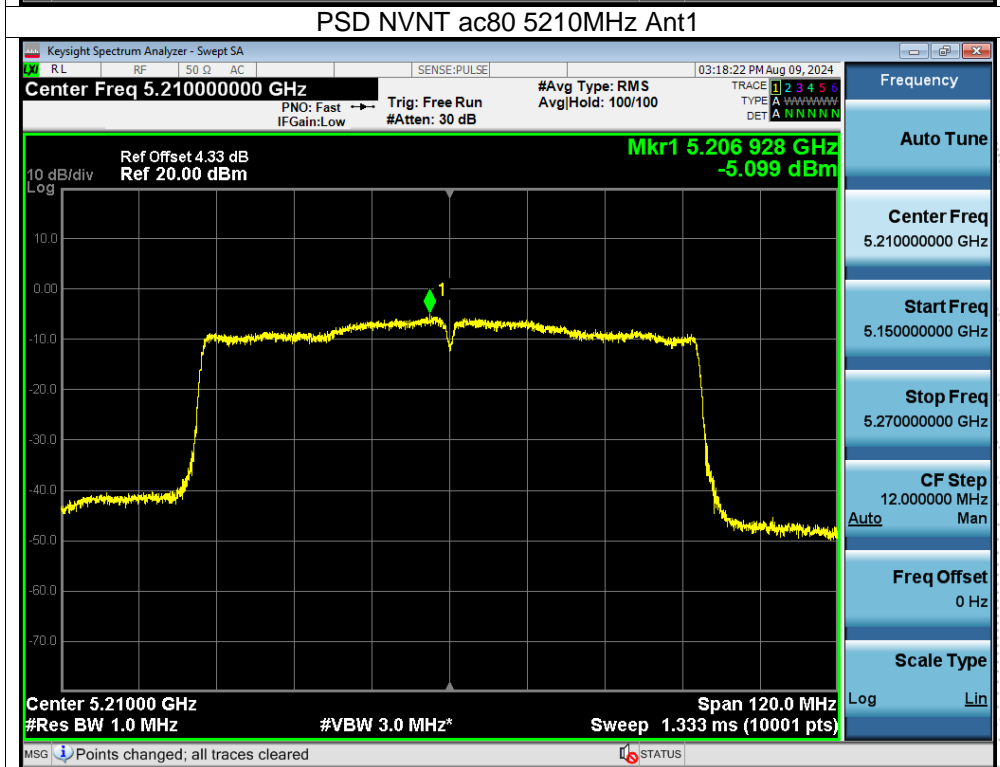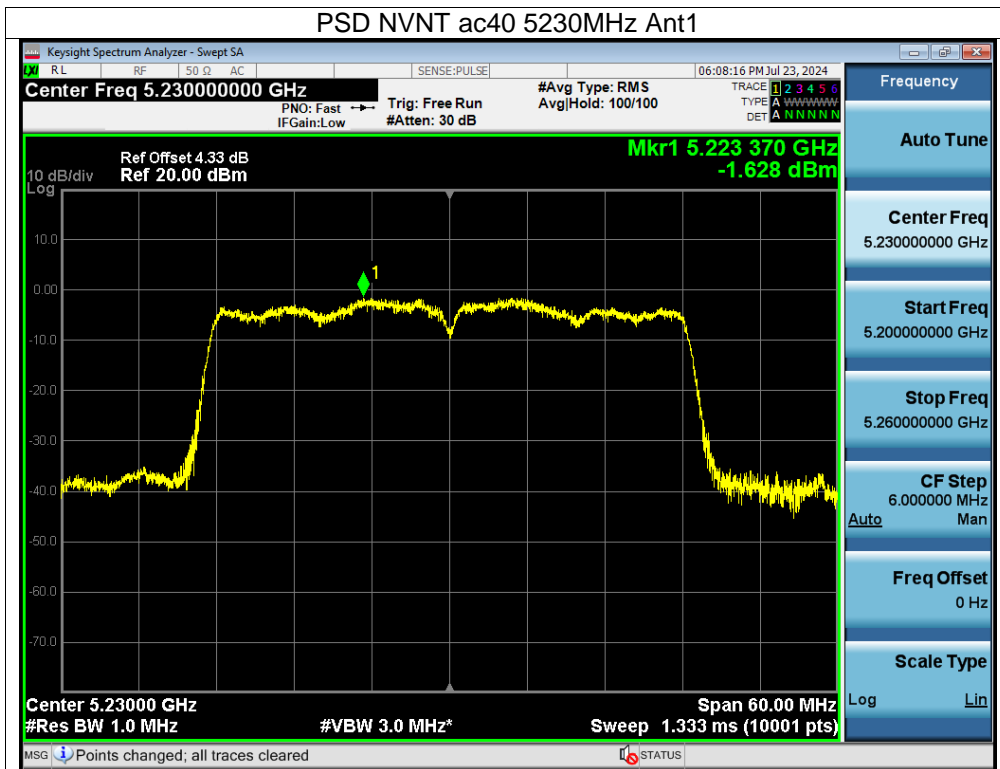

9. 26dB & 6dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

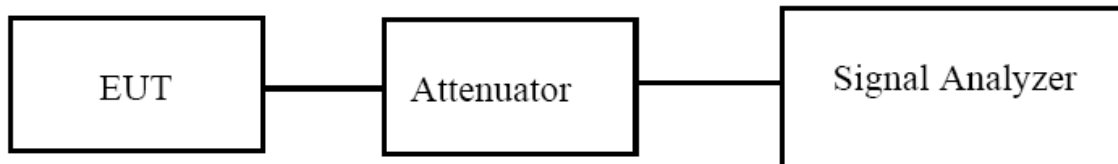

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.3 Test Procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.


9.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


9.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60HZ
Test Mode:	(5180-5240MHz)		



Condition	Mode	Frequency (MHz)	-26 dB (MHz)	Verdict
NVNT	a	5180	20.846	Pass
NVNT	a	5200	20.87	Pass
NVNT	a	5240	20.836	Pass
NVNT	n20	5180	21.157	Pass
NVNT	n20	5200	21.368	Pass
NVNT	n20	5240	21.175	Pass
NVNT	n40	5190	38.939	Pass
NVNT	n40	5230	38.848	Pass
NVNT	ac20	5180	21.085	Pass
NVNT	ac20	5200	21.444	Pass
NVNT	ac20	5240	21.258	Pass
NVNT	ac40	5190	39.297	Pass
NVNT	ac40	5230	39.496	Pass
NVNT	ac80	5210	80.039	Pass


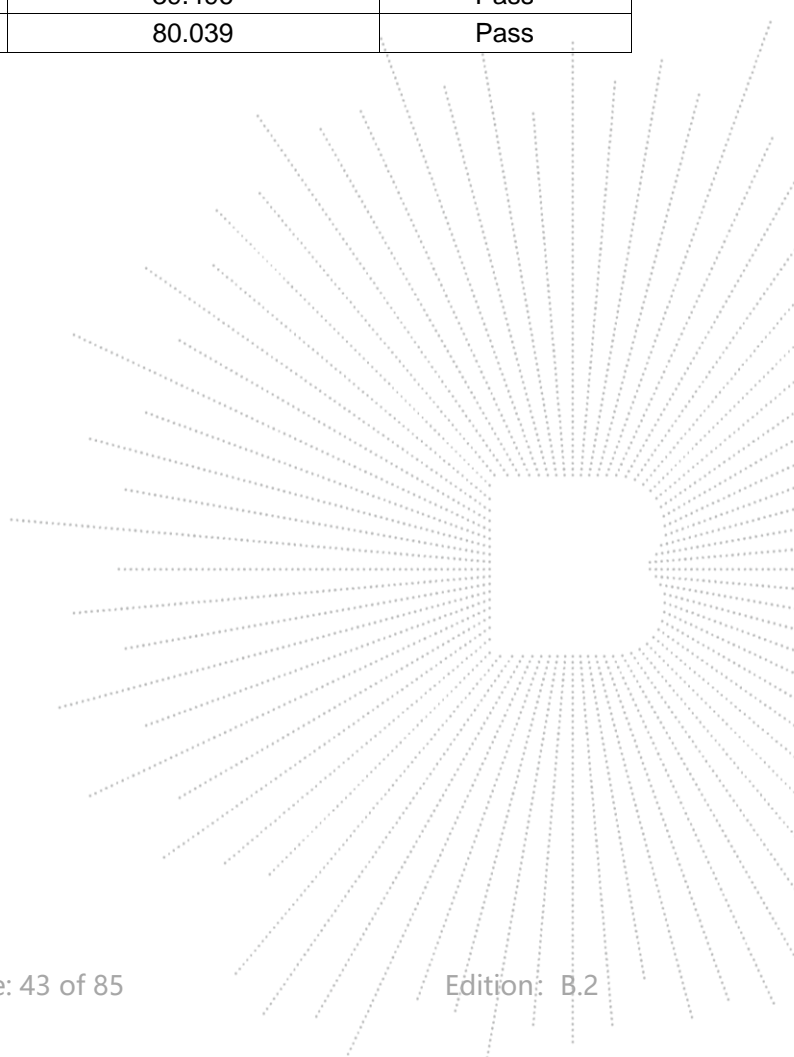




Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.413
NVNT	a	5200	16.414
NVNT	a	5240	16.412
NVNT	n20	5180	17.64
NVNT	n20	5200	17.694
NVNT	n20	5240	17.649
NVNT	n40	5190	36.203
NVNT	n40	5230	36.238
NVNT	ac20	5180	17.702
NVNT	ac20	5200	17.698
NVNT	ac20	5240	17.704
NVNT	ac40	5190	36.229
NVNT	ac40	5230	36.379
NVNT	ac80	5210	75.396


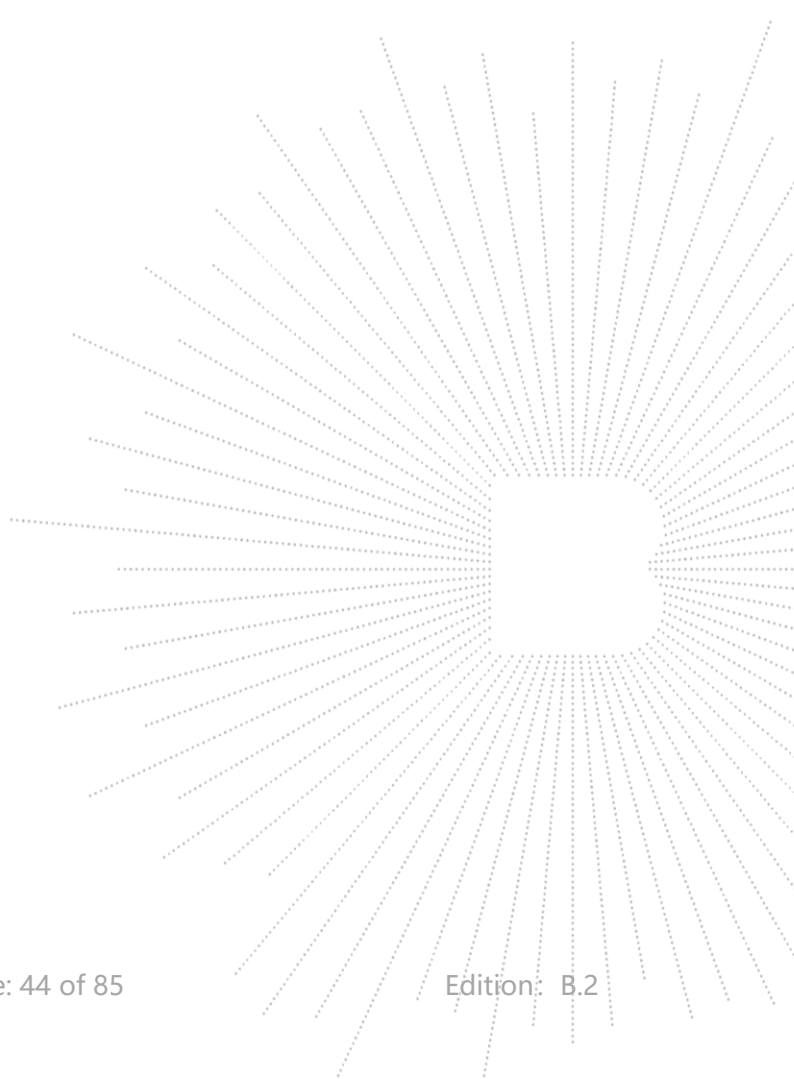


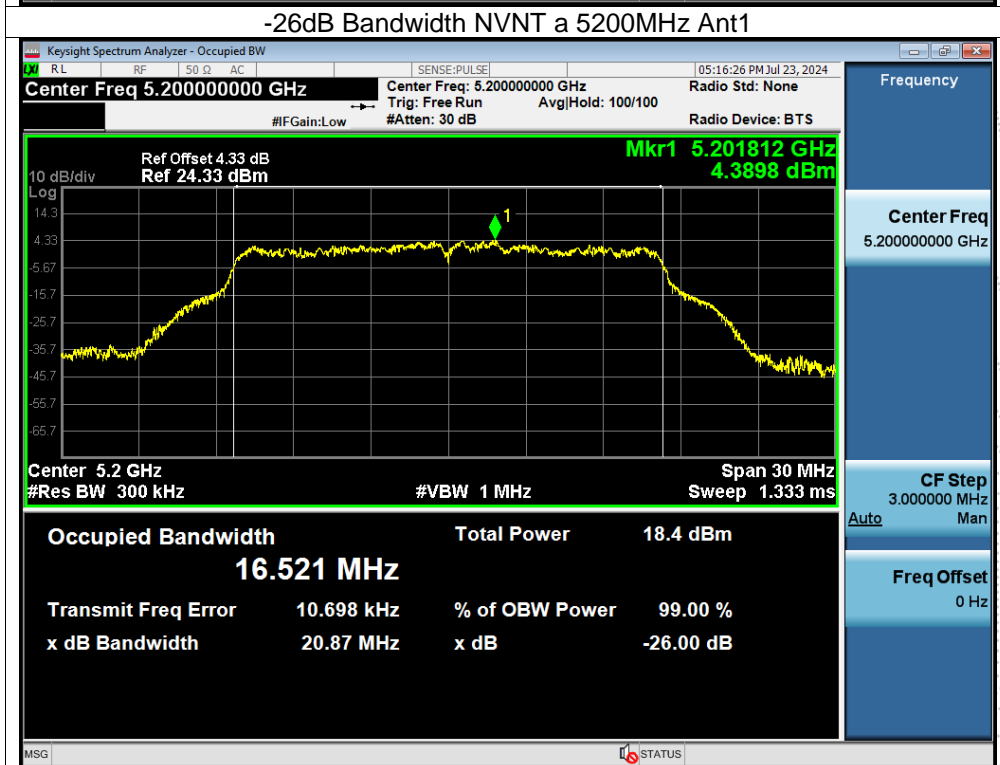
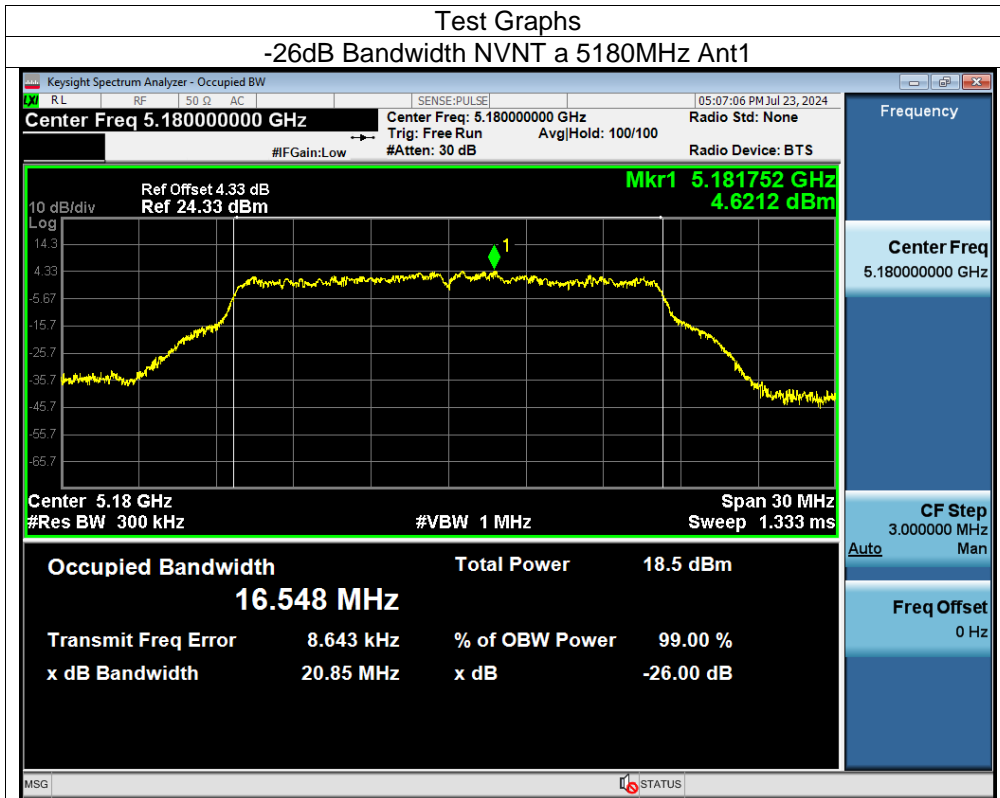


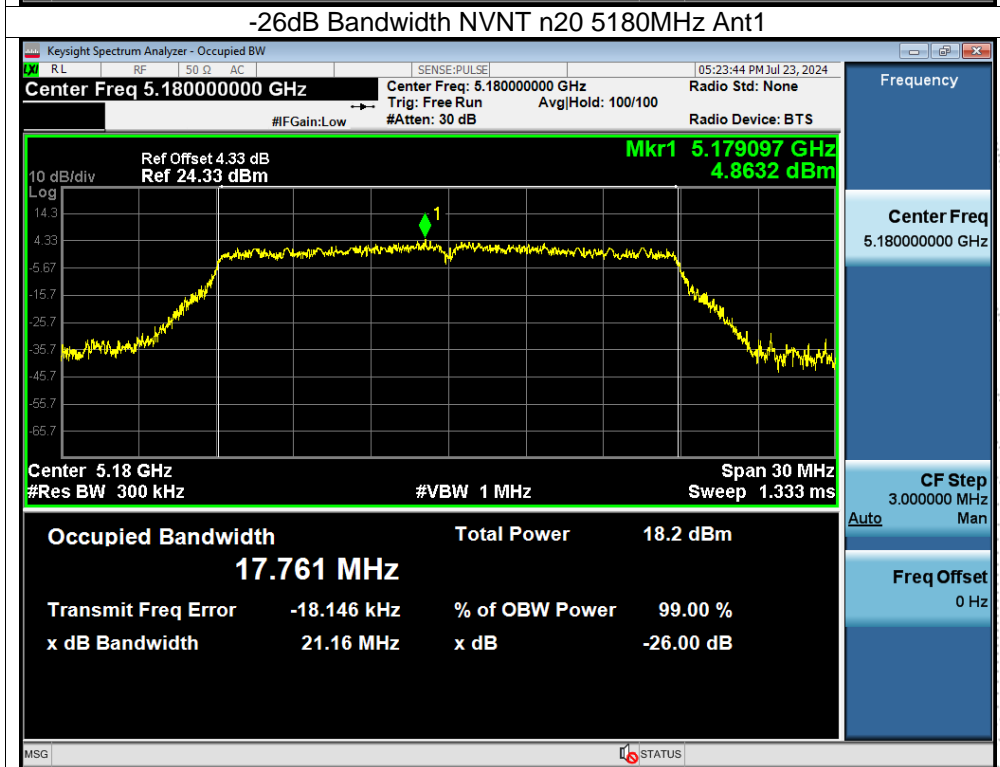
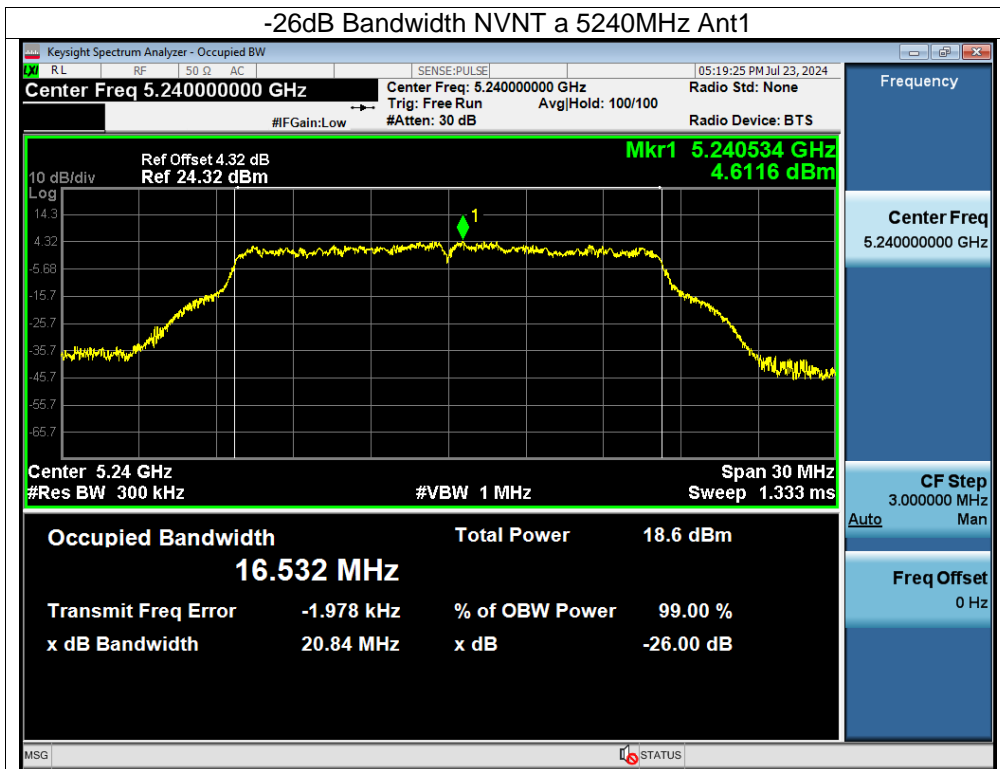


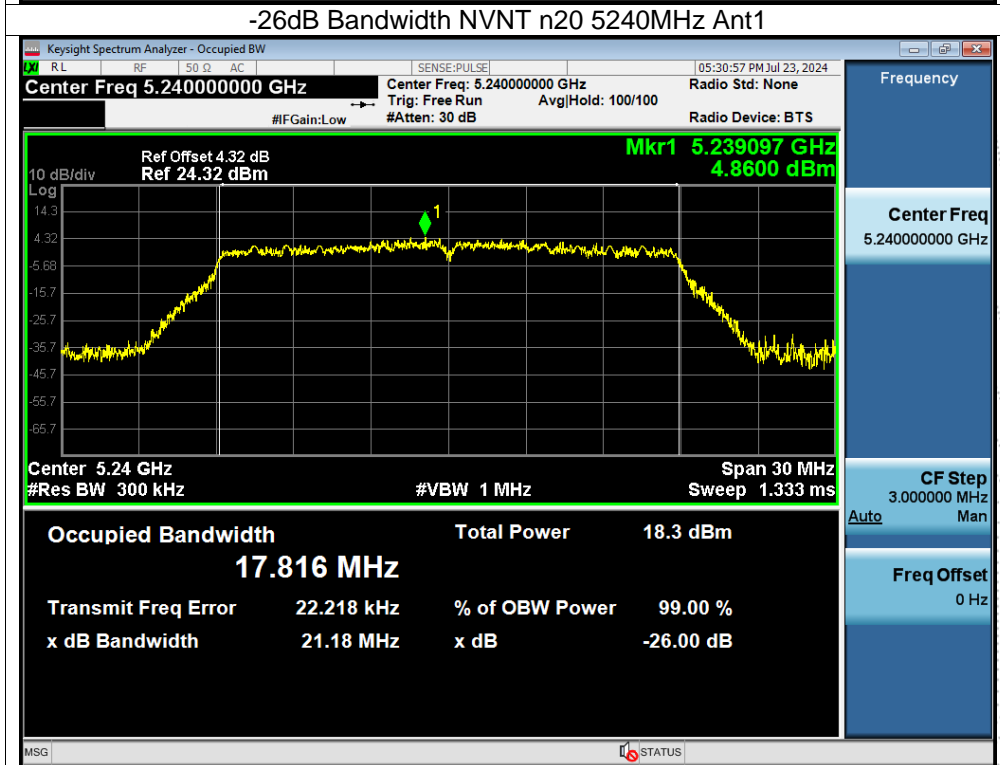
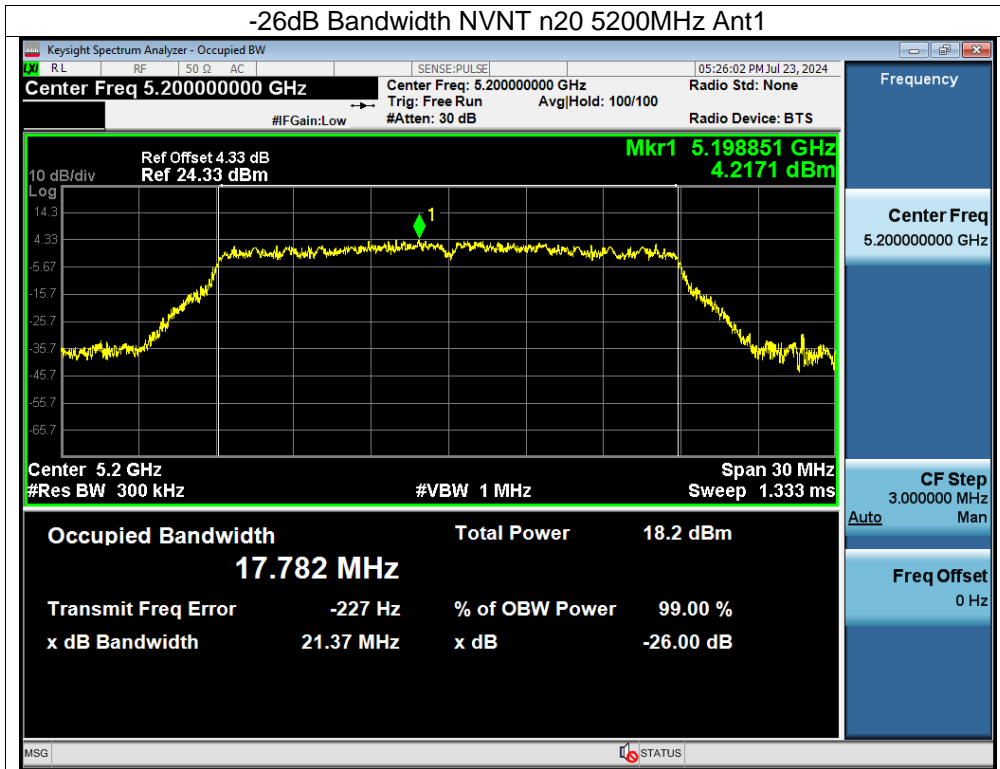


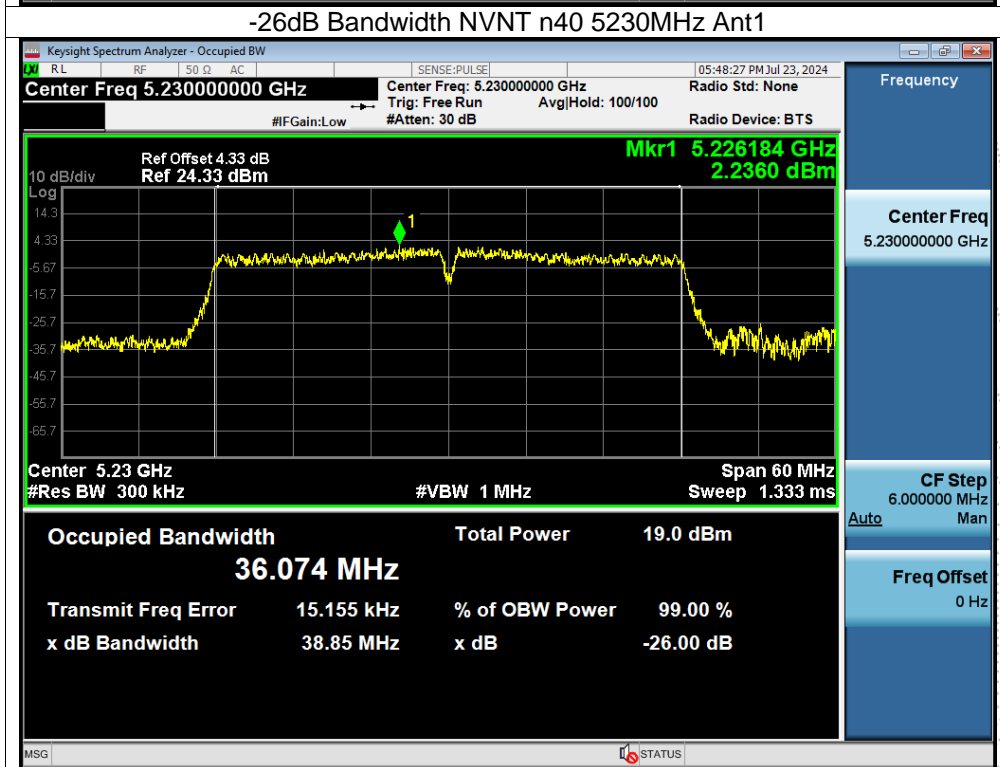
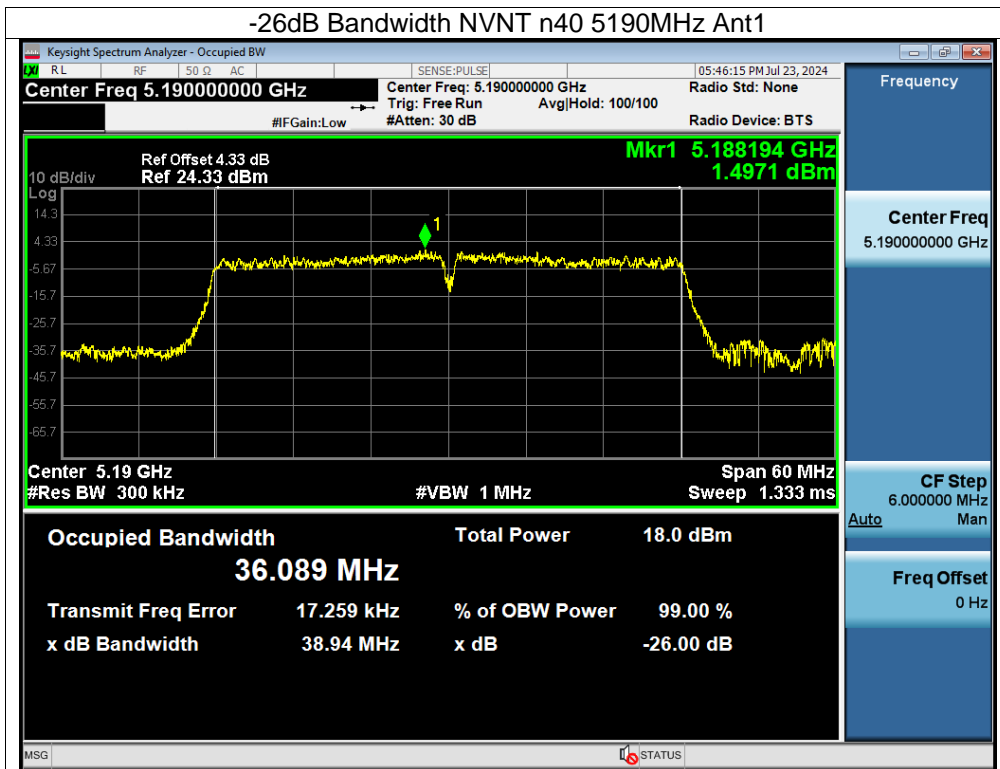


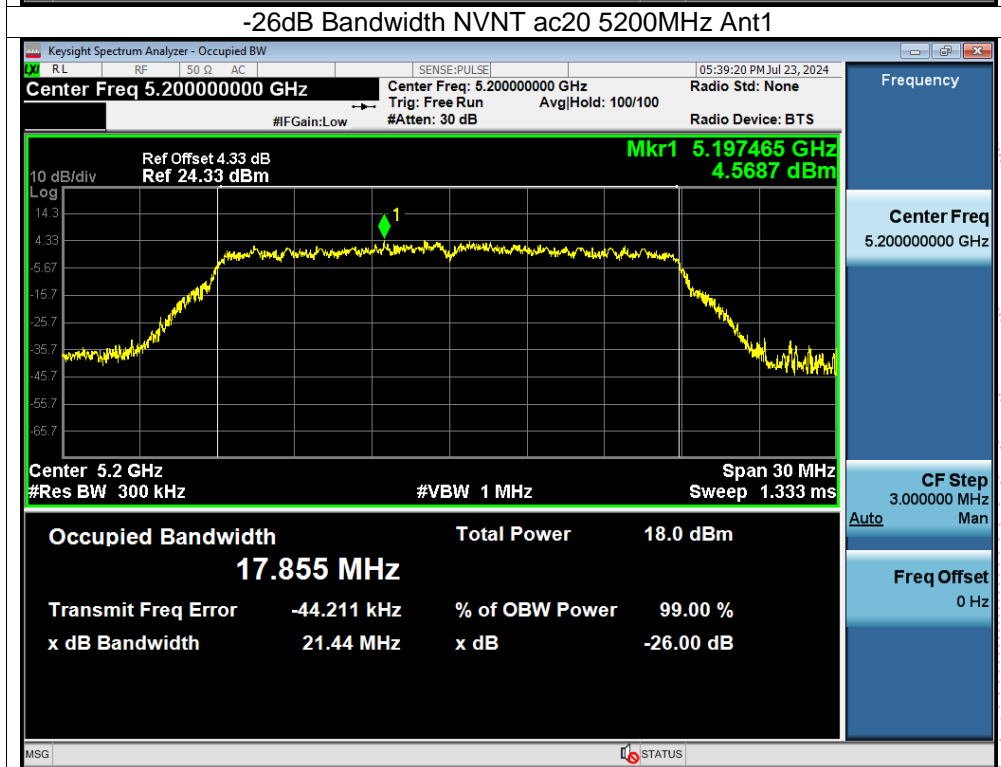
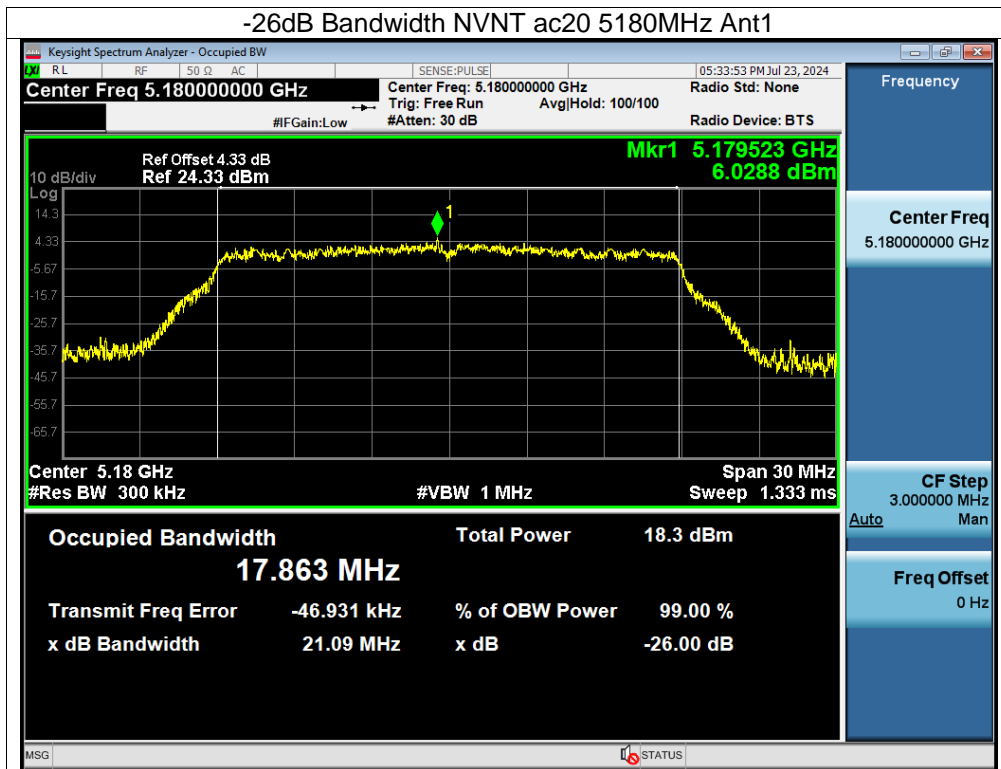


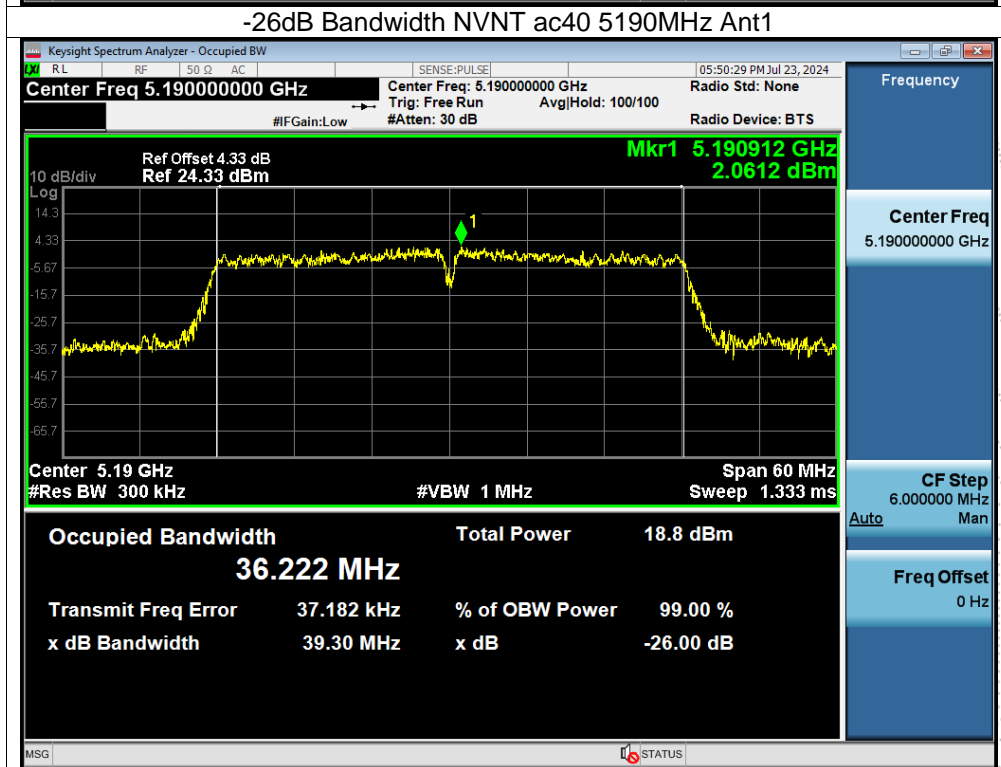
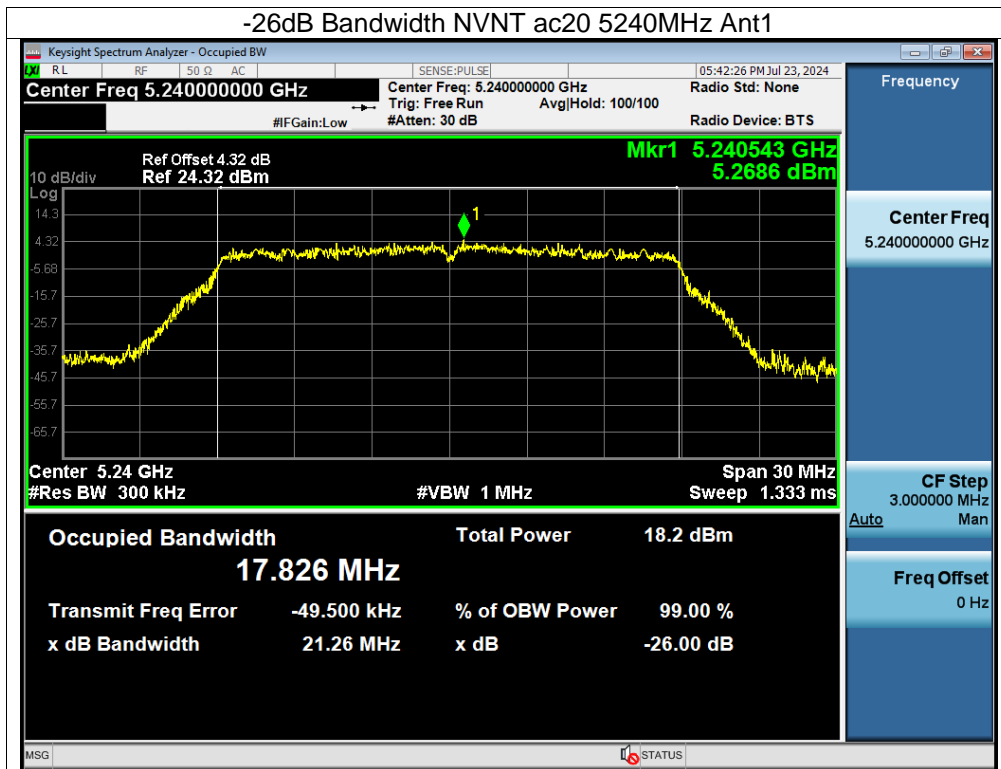


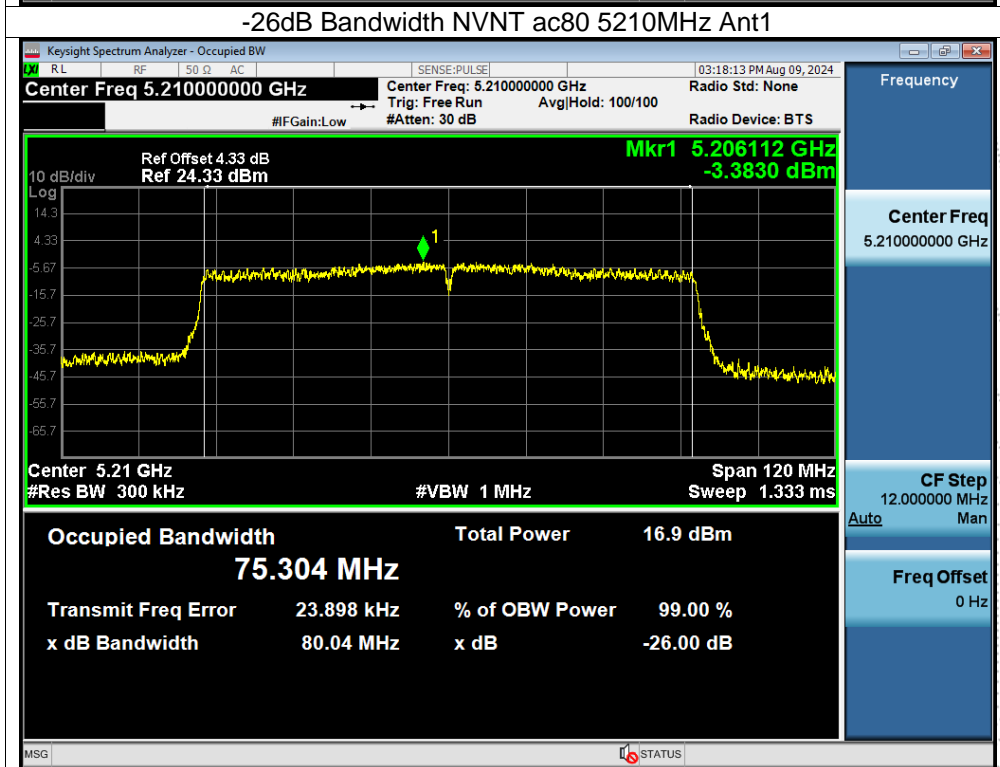
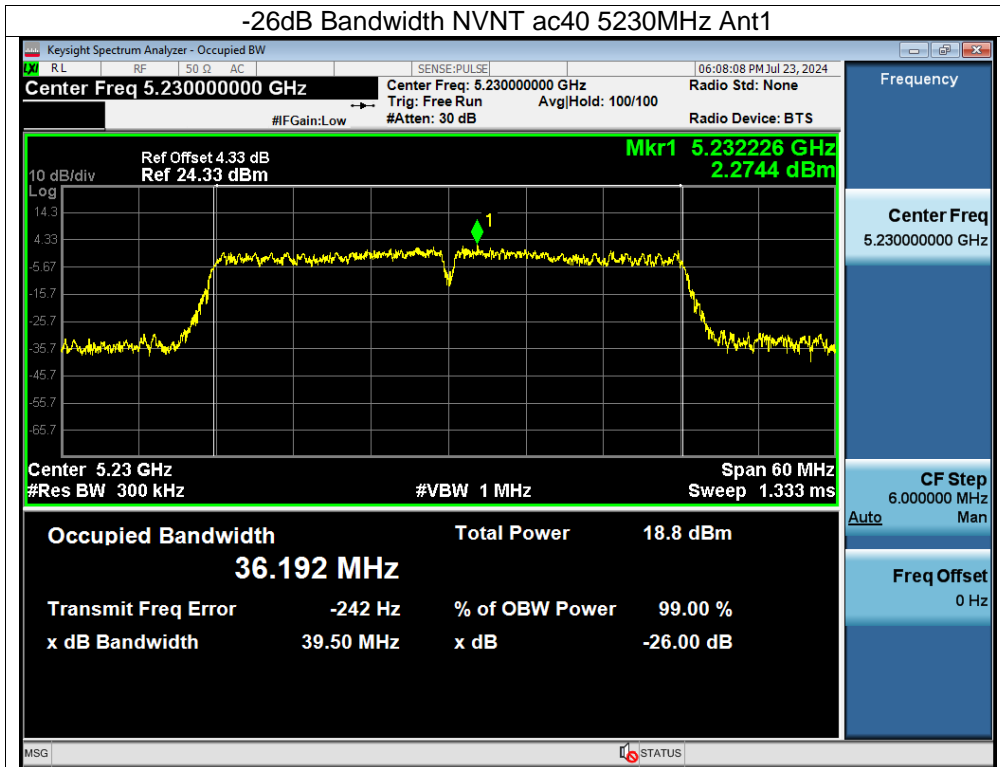


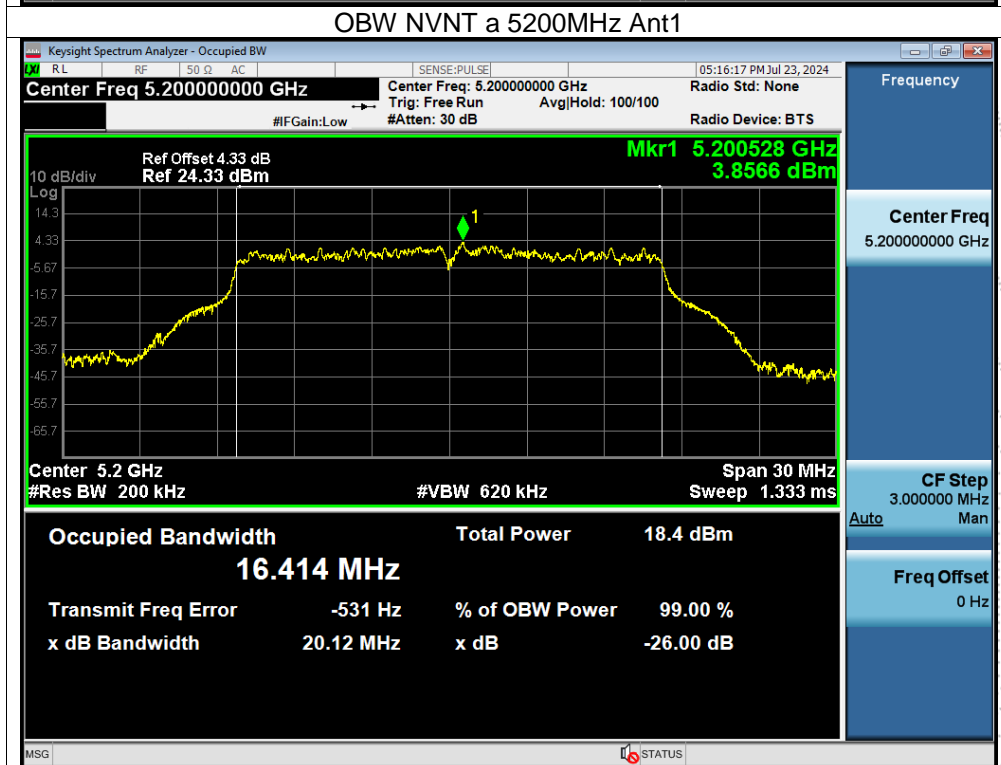
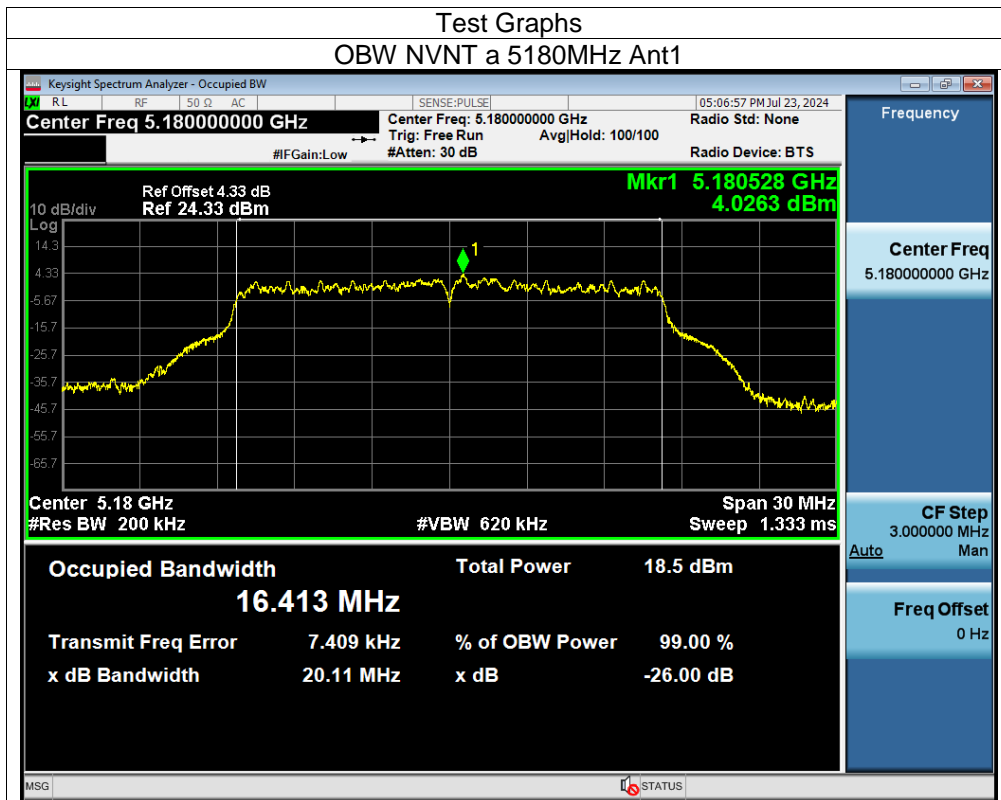


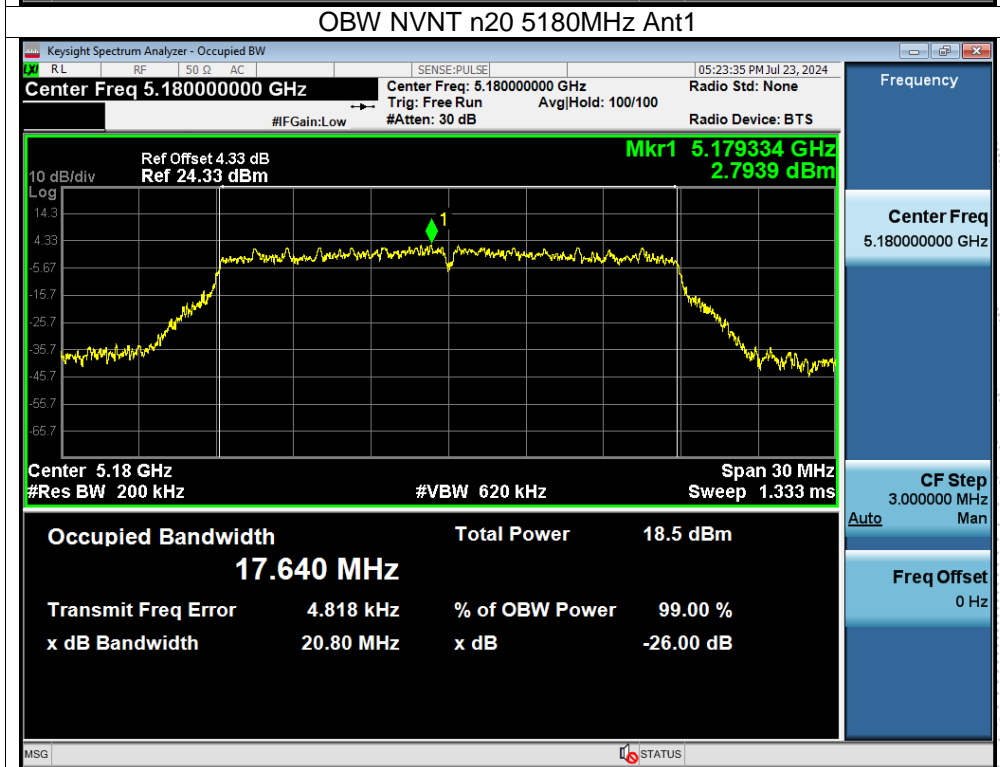
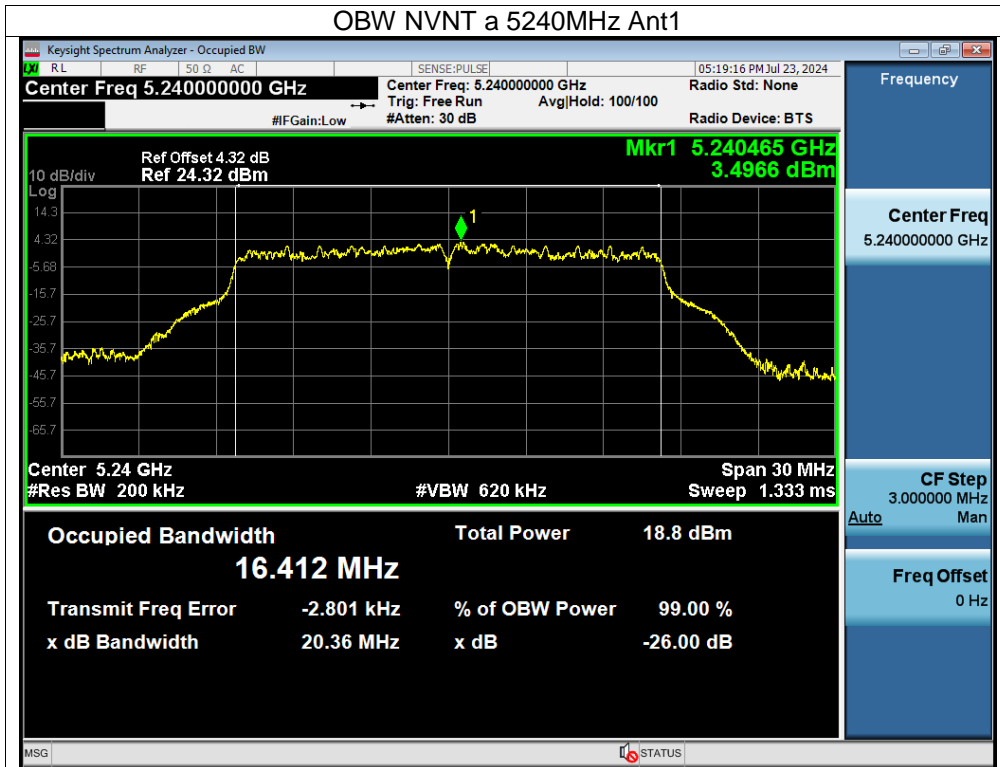


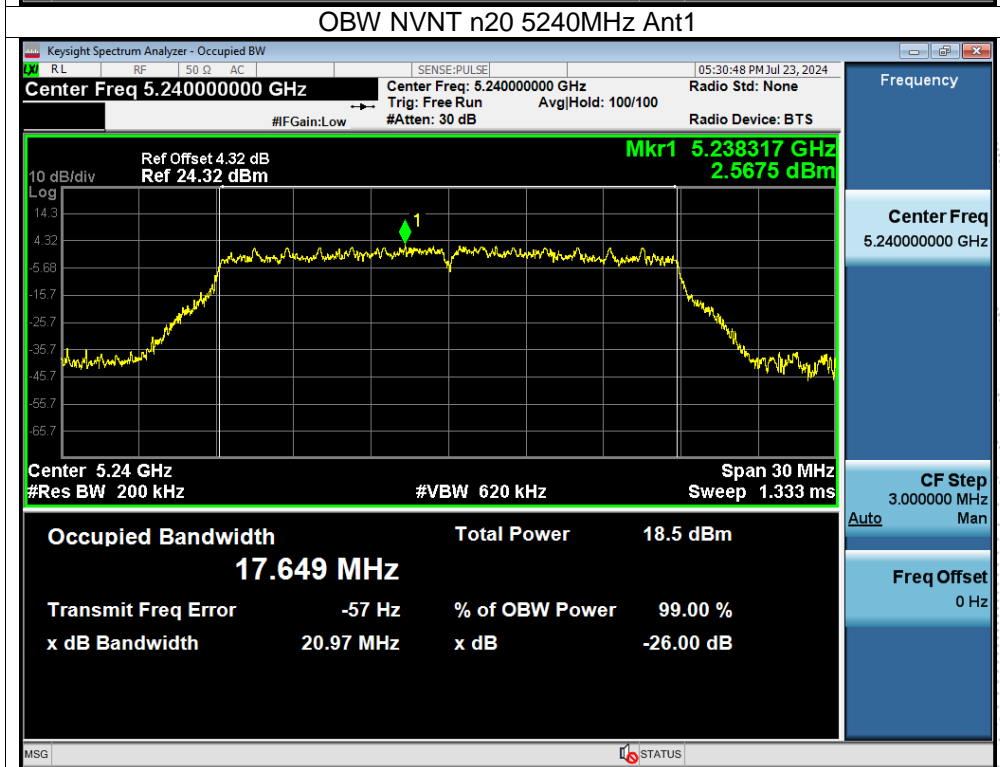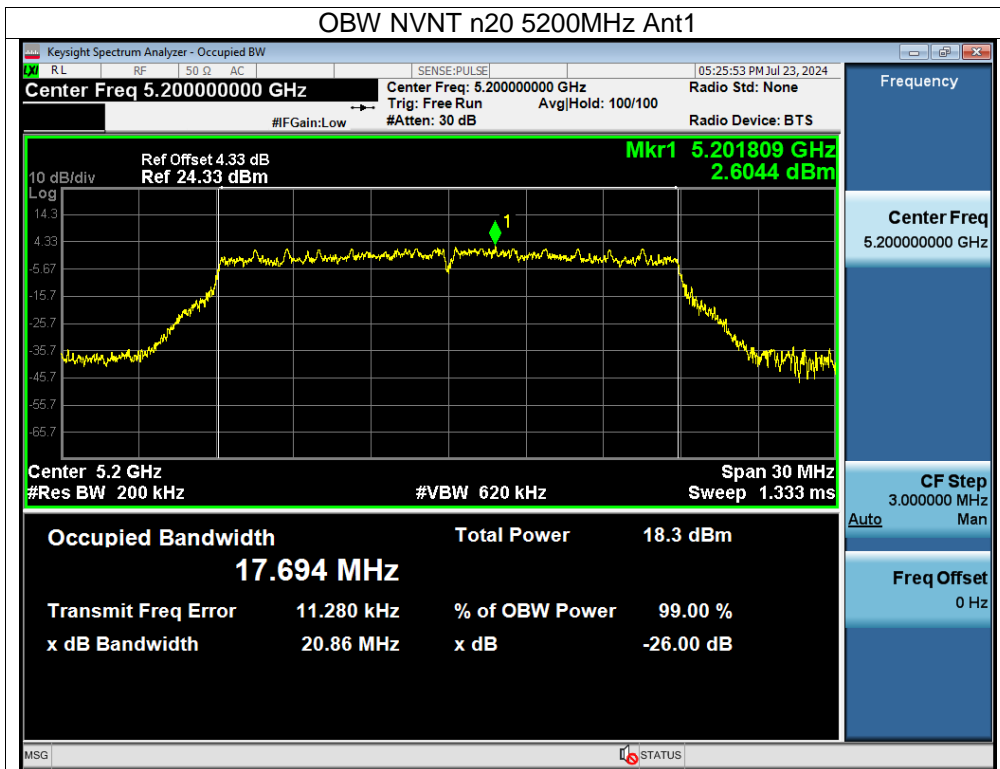

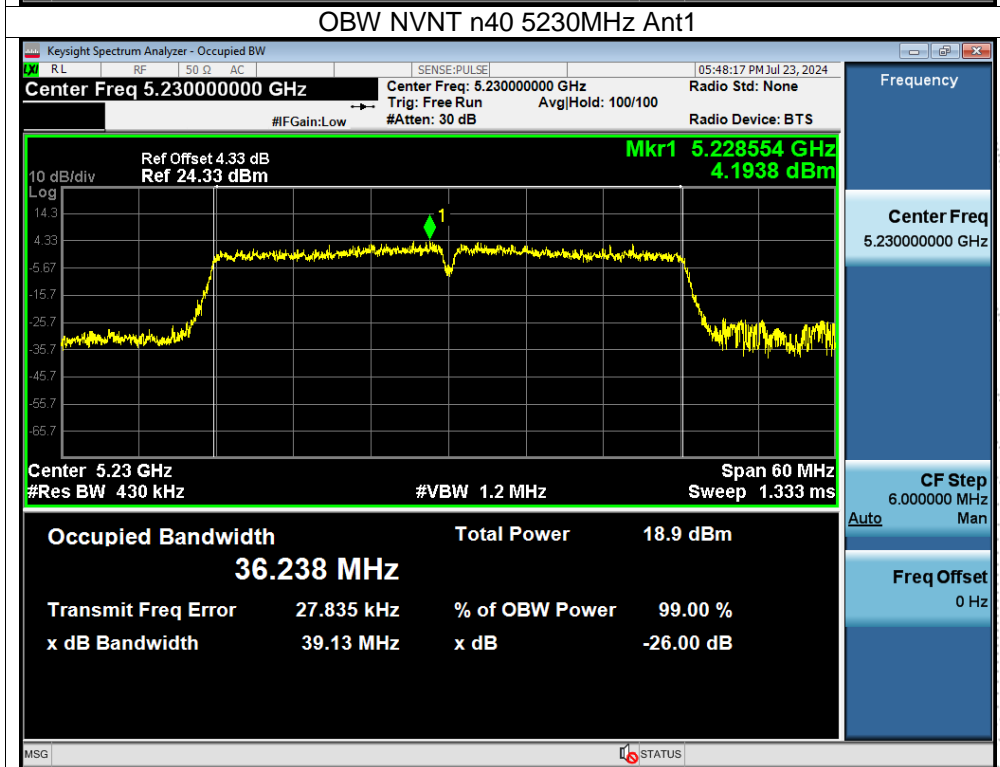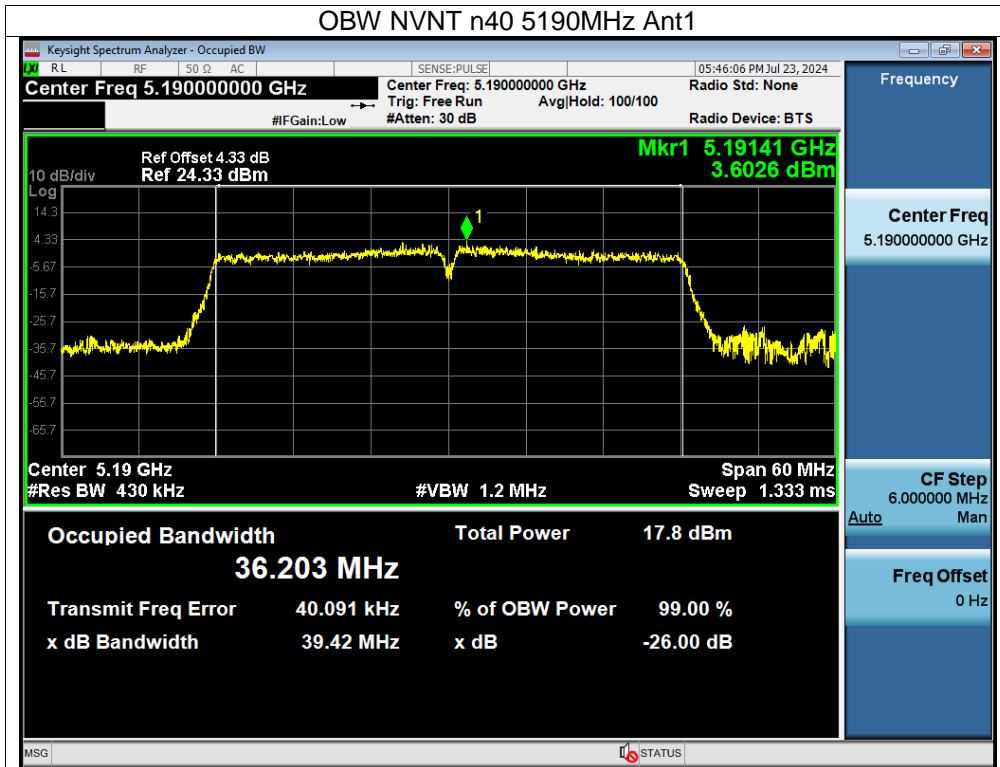

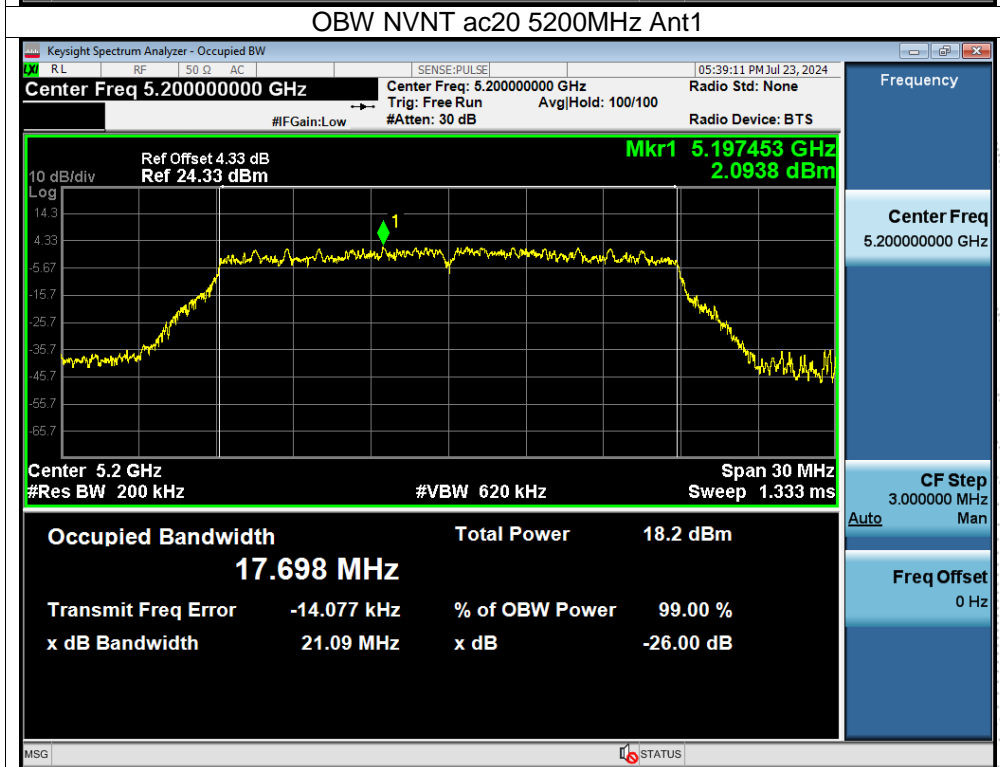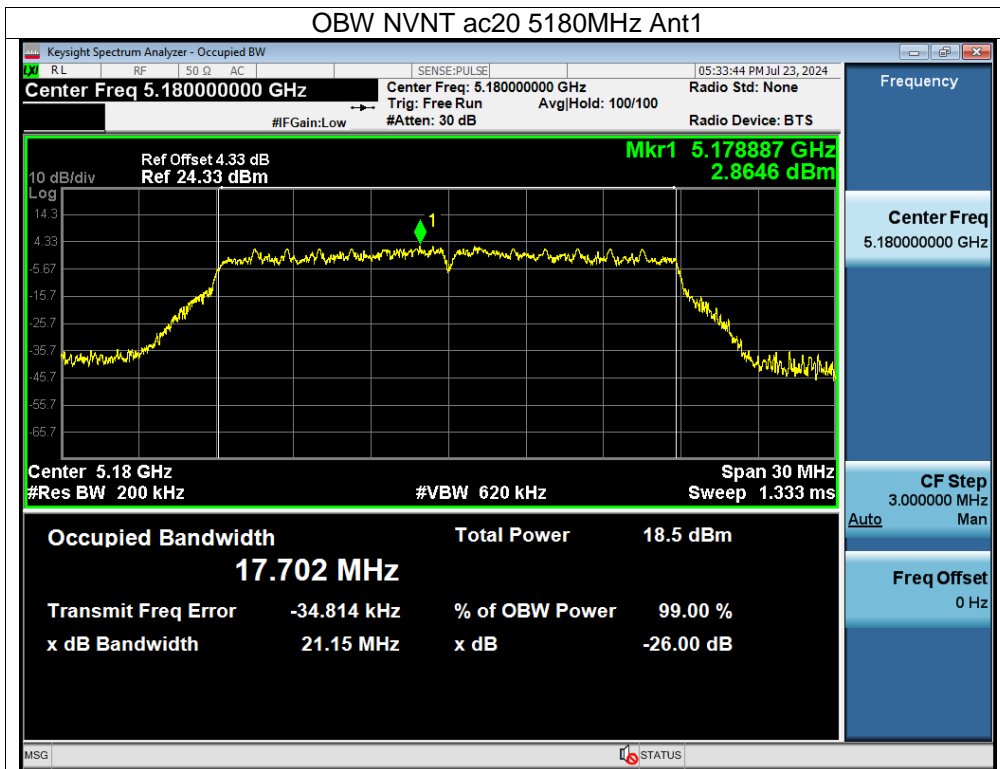

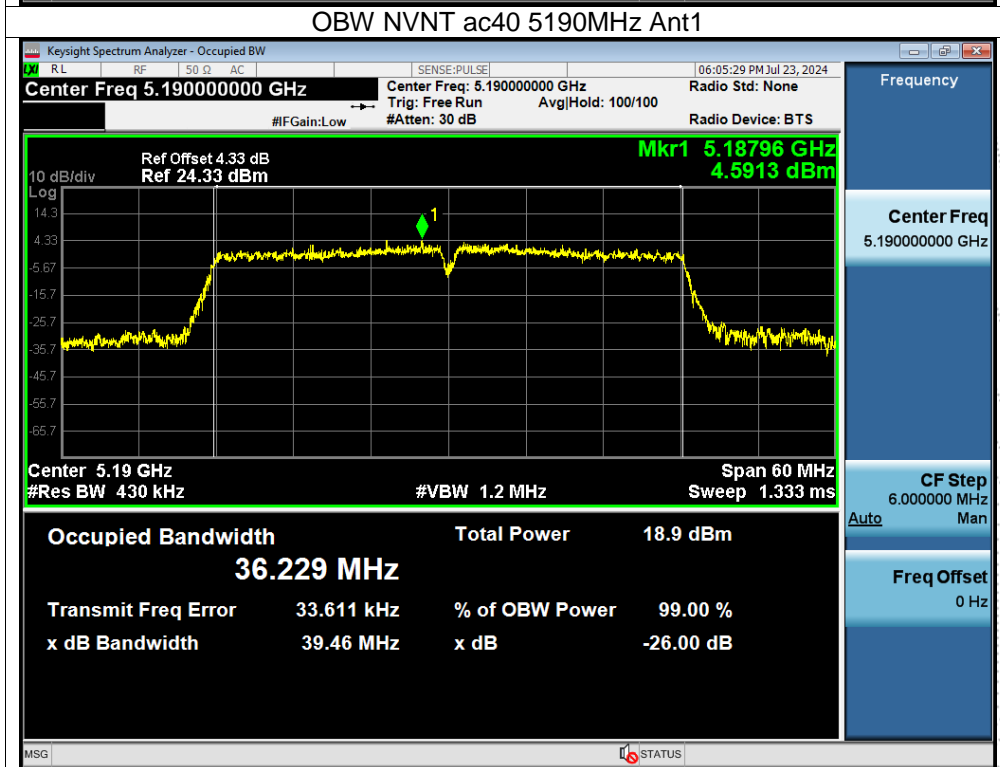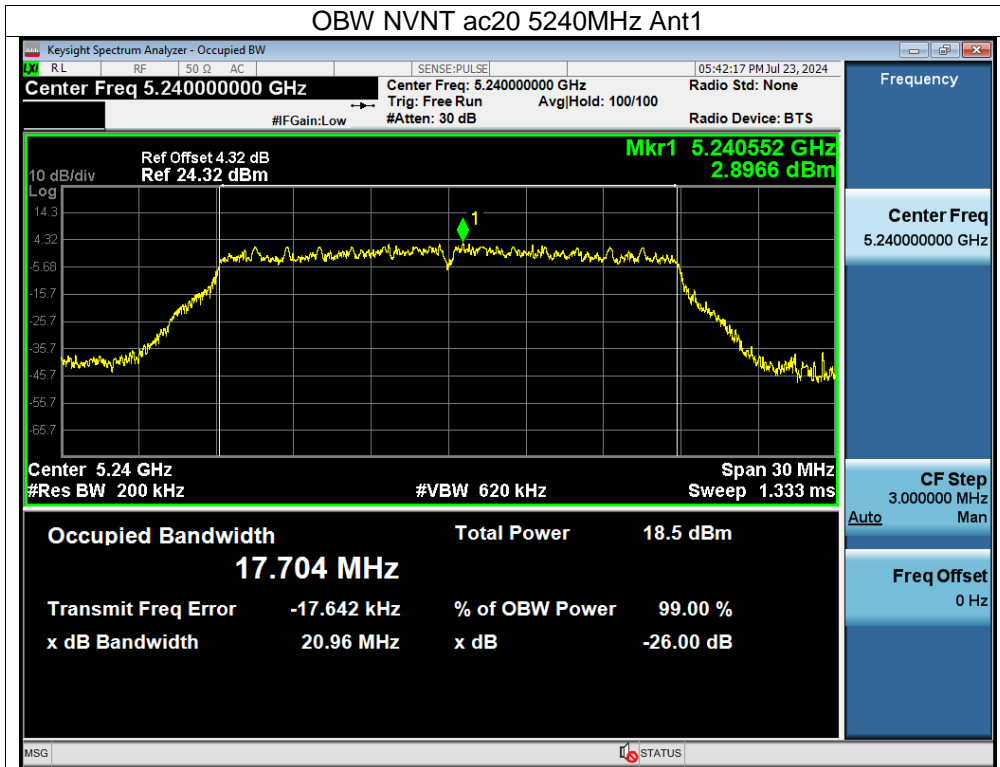

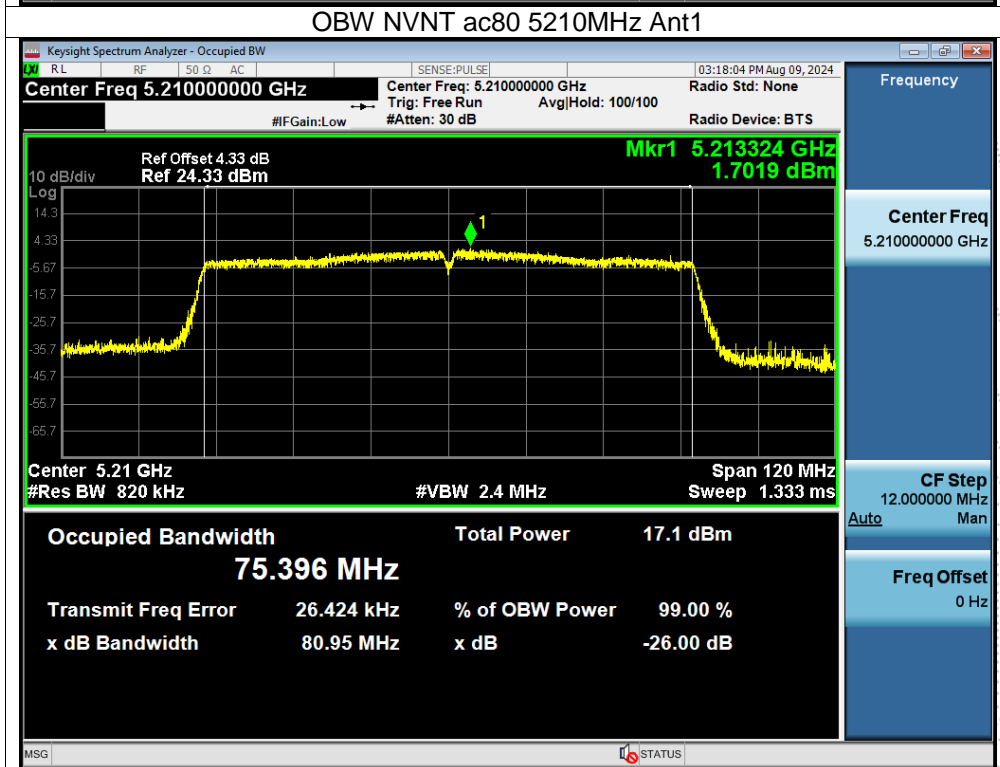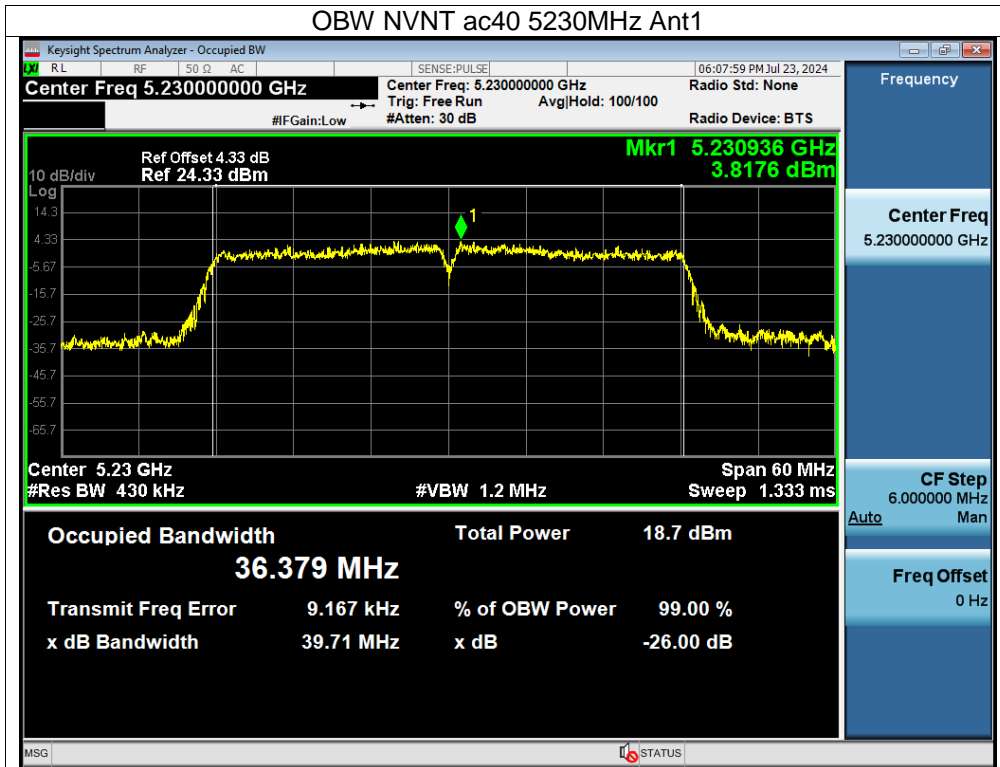

10. Maximum Conducted Output Power

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	0.25W
5250~5350	0.25W
5725~5850	1W

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).

- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.


(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

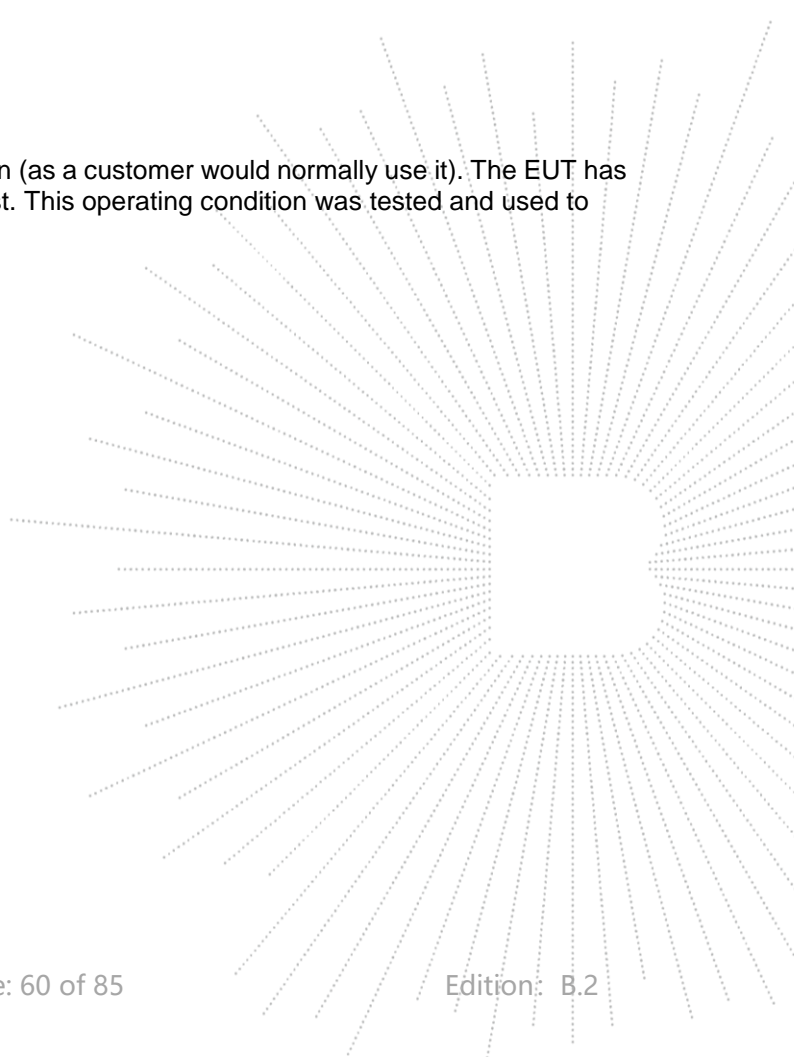

10.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60HZ
Test Mode:	5180-5240MHz		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	11.83	24	Pass
NVNT	a	5200	11.73	24	Pass
NVNT	a	5240	11.98	24	Pass
NVNT	n20	5180	11.43	24	Pass
NVNT	n20	5200	11.4	24	Pass
NVNT	n20	5240	11.46	24	Pass
NVNT	n40	5190	10.62	24	Pass
NVNT	n40	5230	11.59	24	Pass
NVNT	ac20	5180	11.36	24	Pass
NVNT	ac20	5200	11.22	24	Pass
NVNT	ac20	5240	11.25	24	Pass
NVNT	ac40	5190	11.33	24	Pass
NVNT	ac40	5230	11.26	24	Pass
NVNT	ac80	5210	10.33	24	Pass

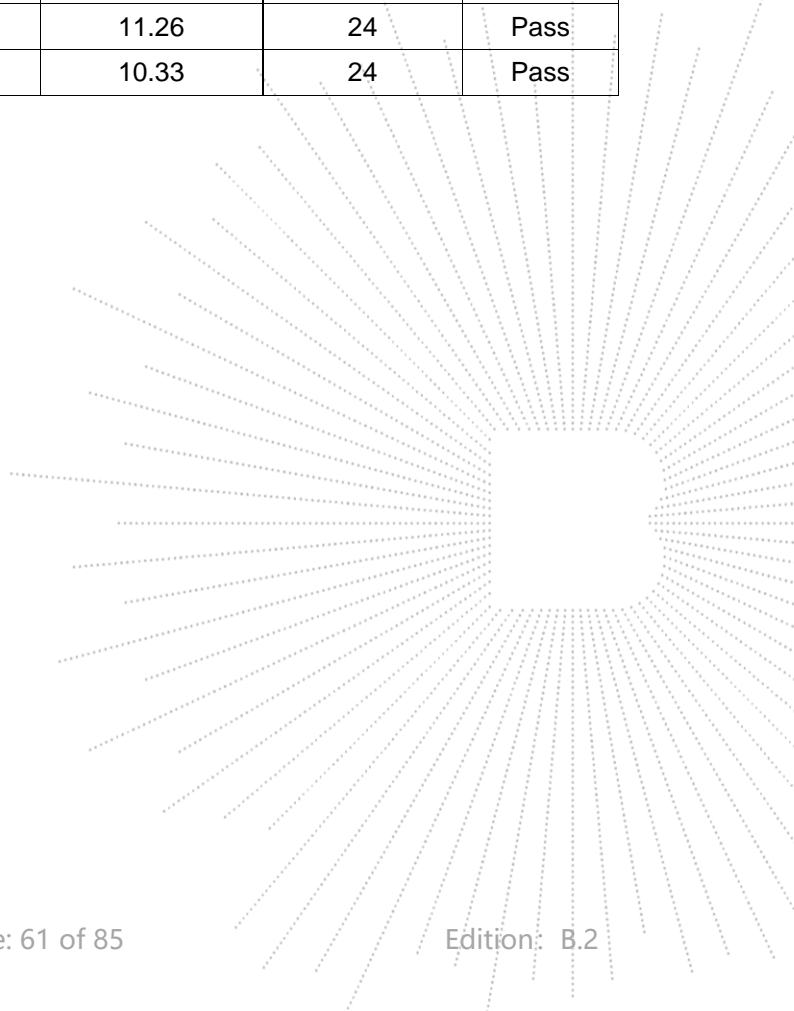

11. Out Of Band Emissions

11.1 Block Diagram Of Test Setup

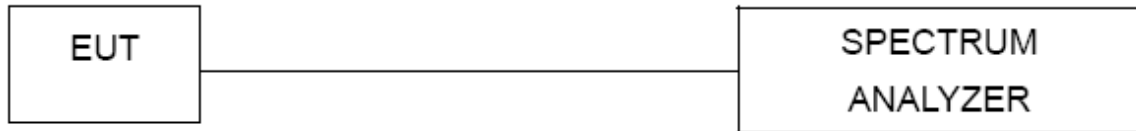

11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



11.4 EUT Operating Conditions



The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data



11.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	AC 120V/60HZ



5180-5240MHz

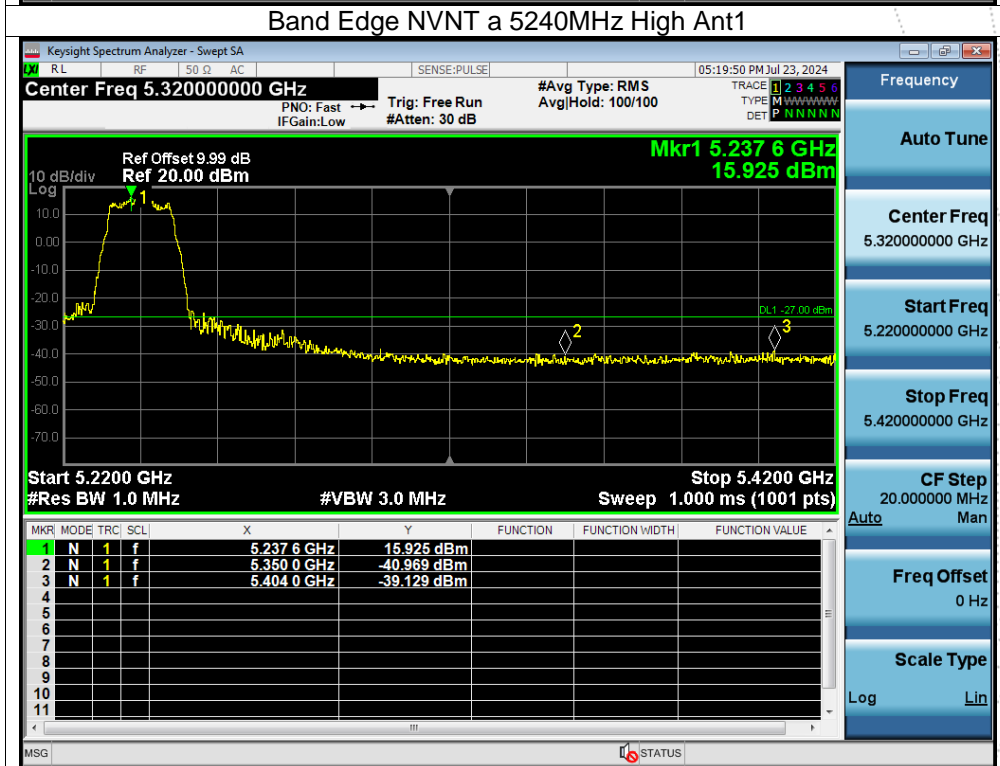
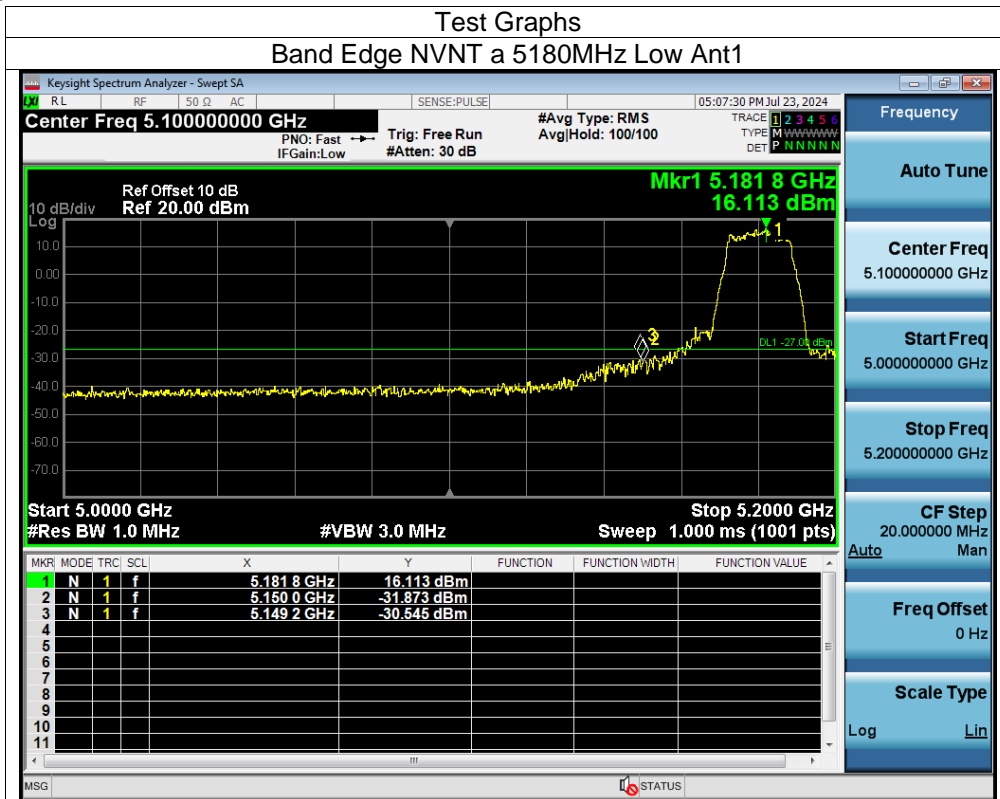


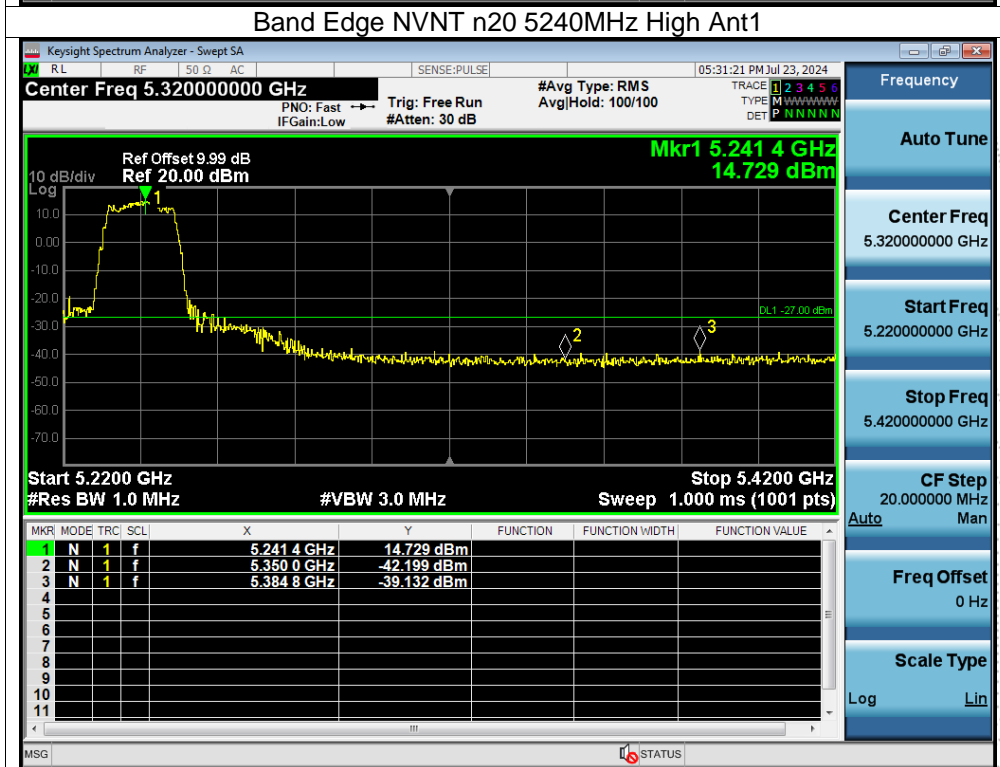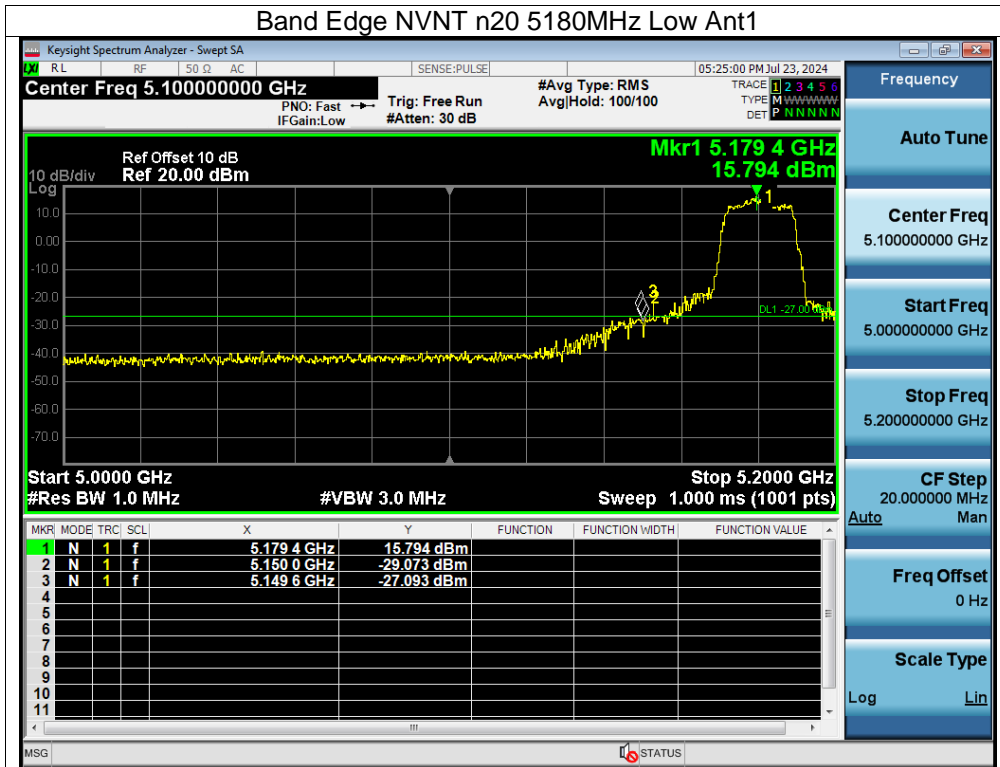

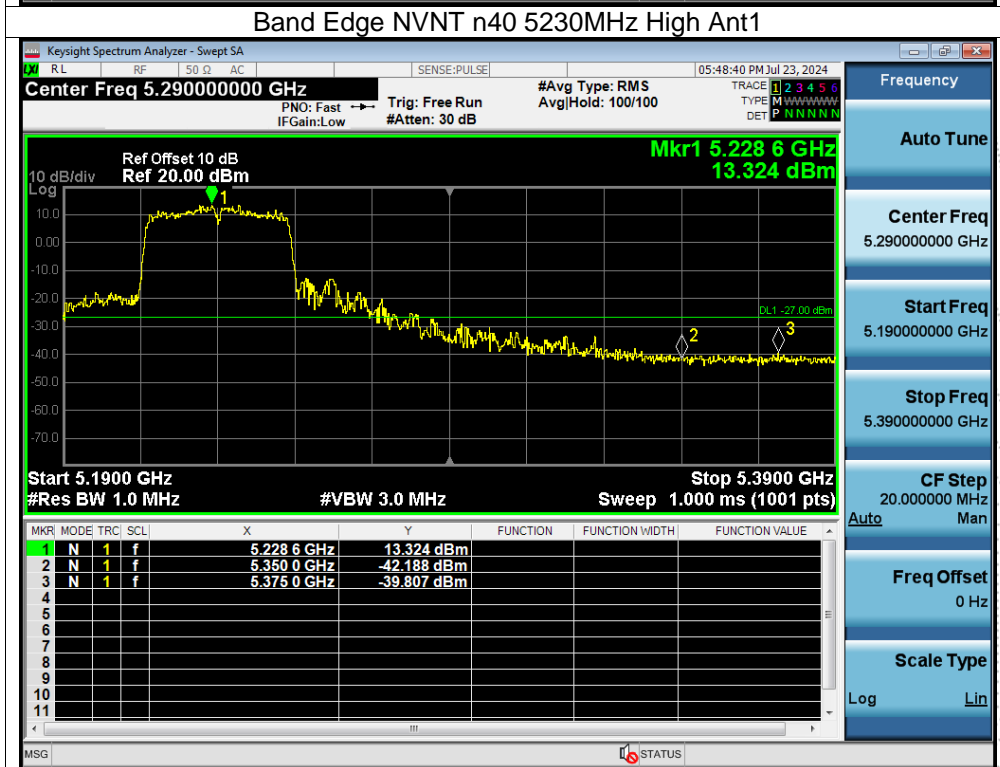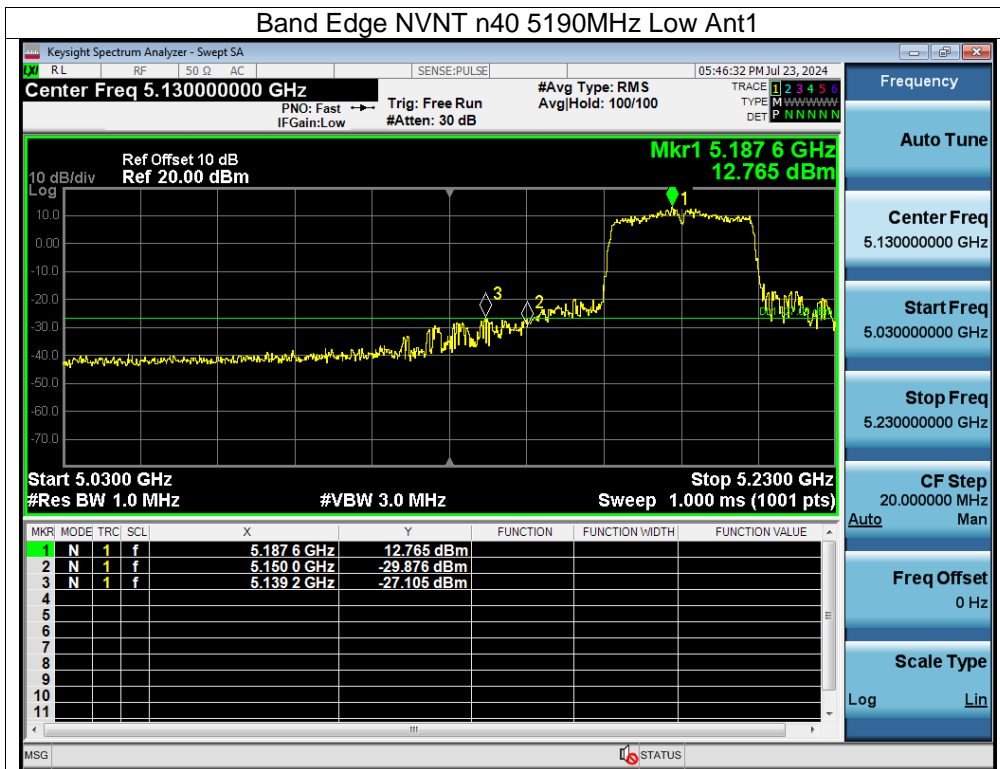

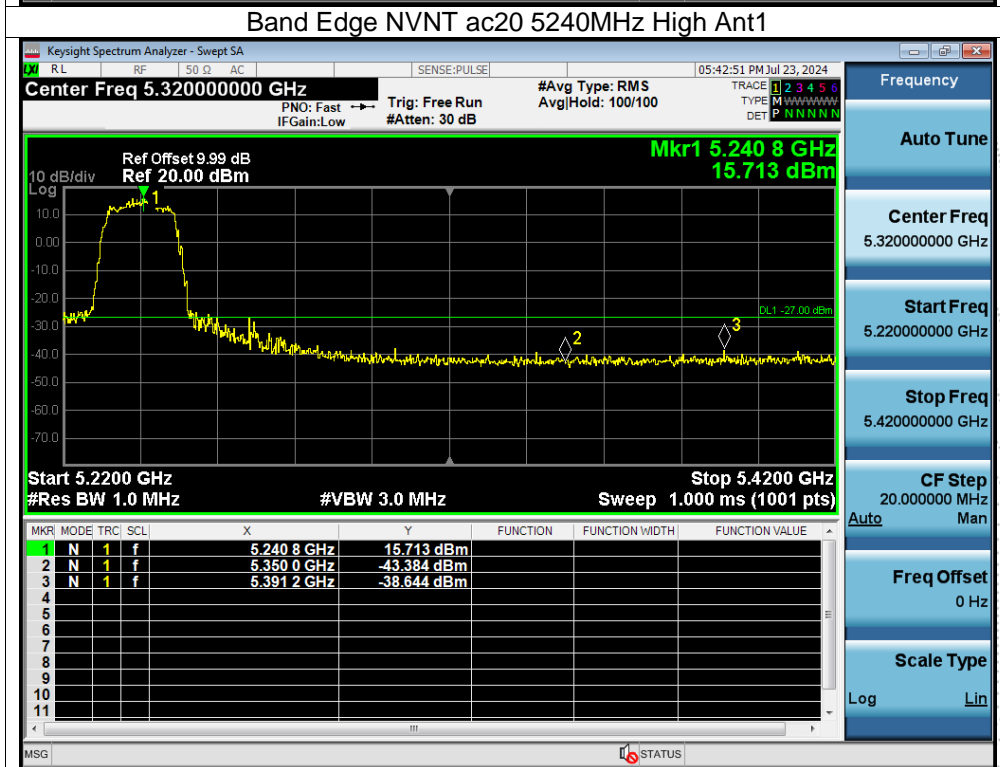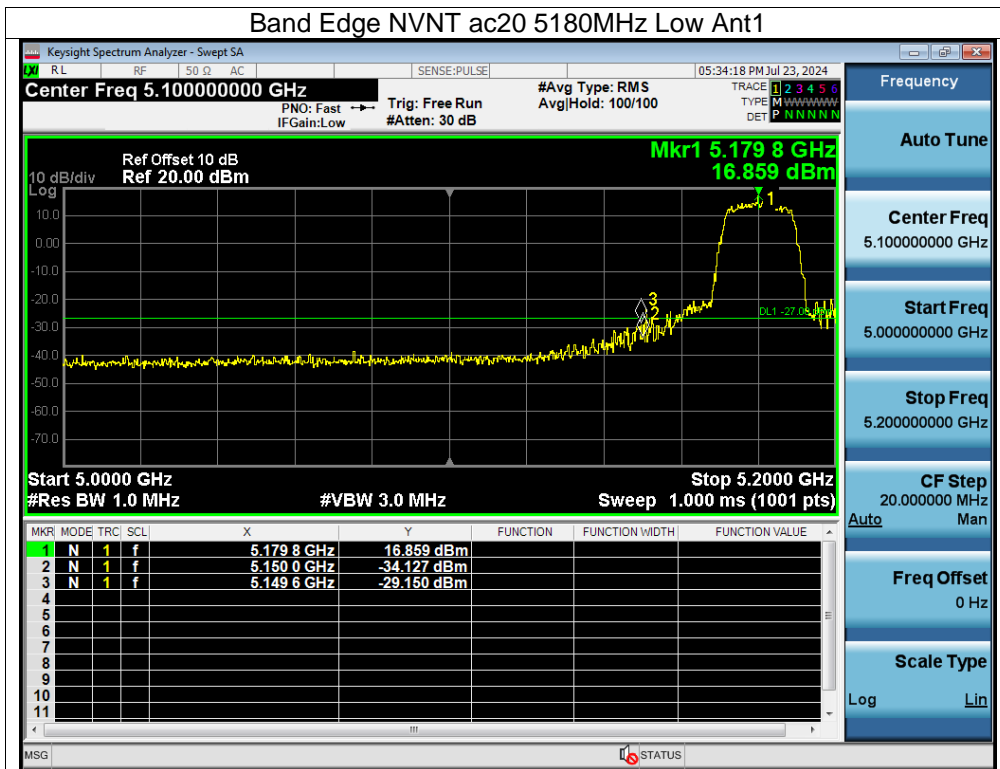

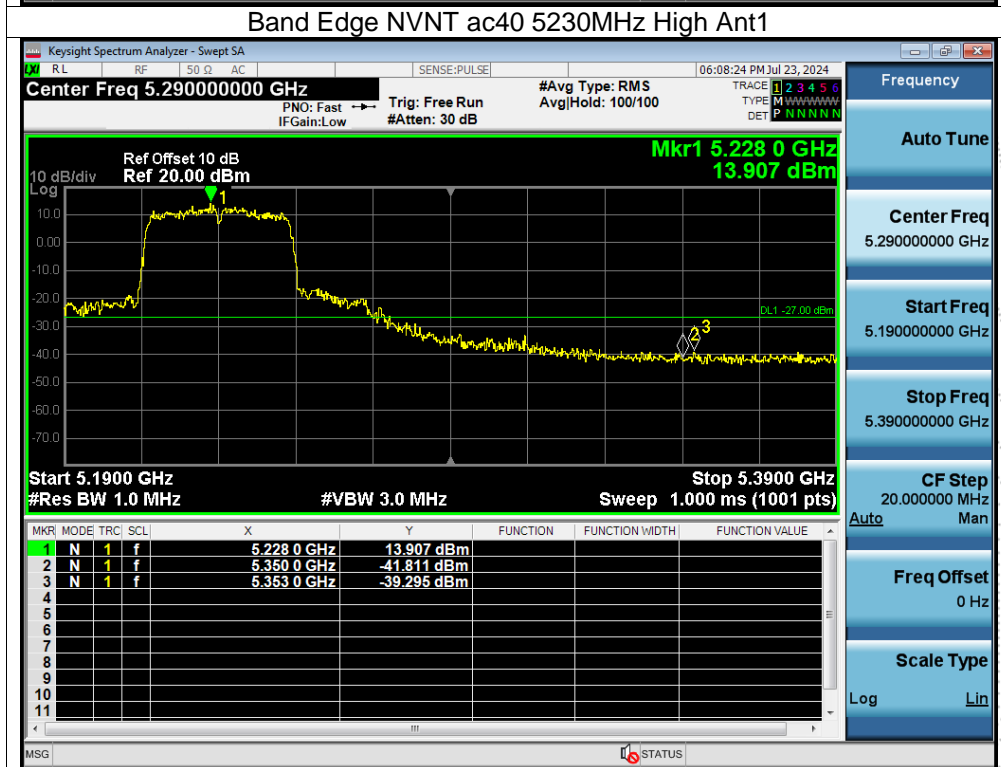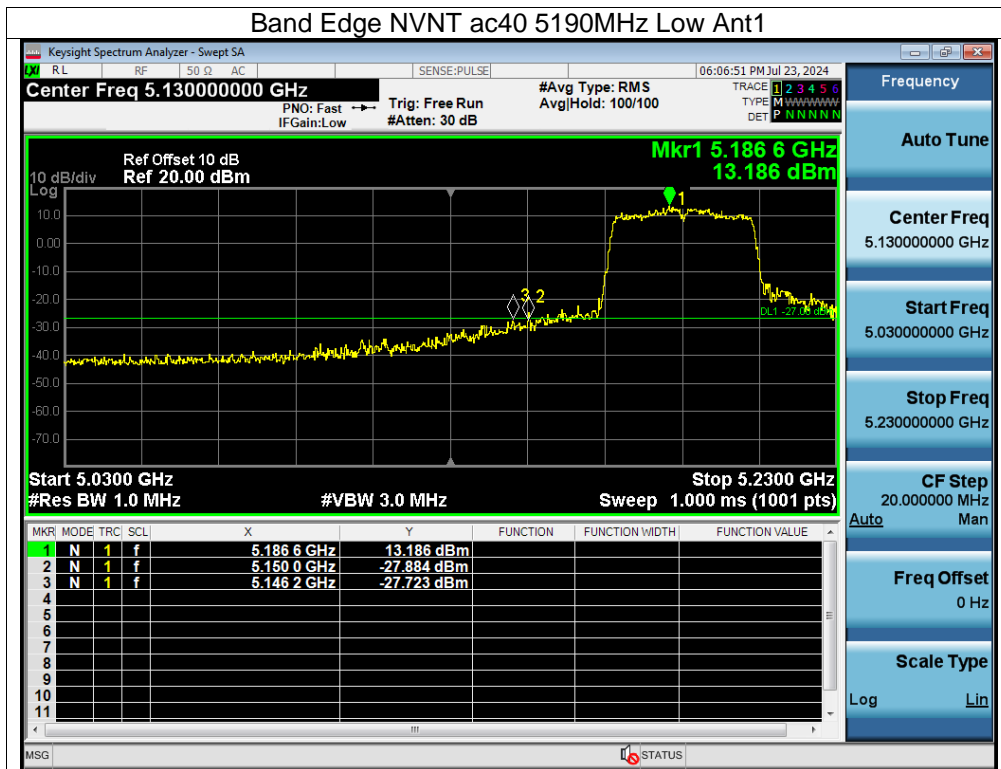

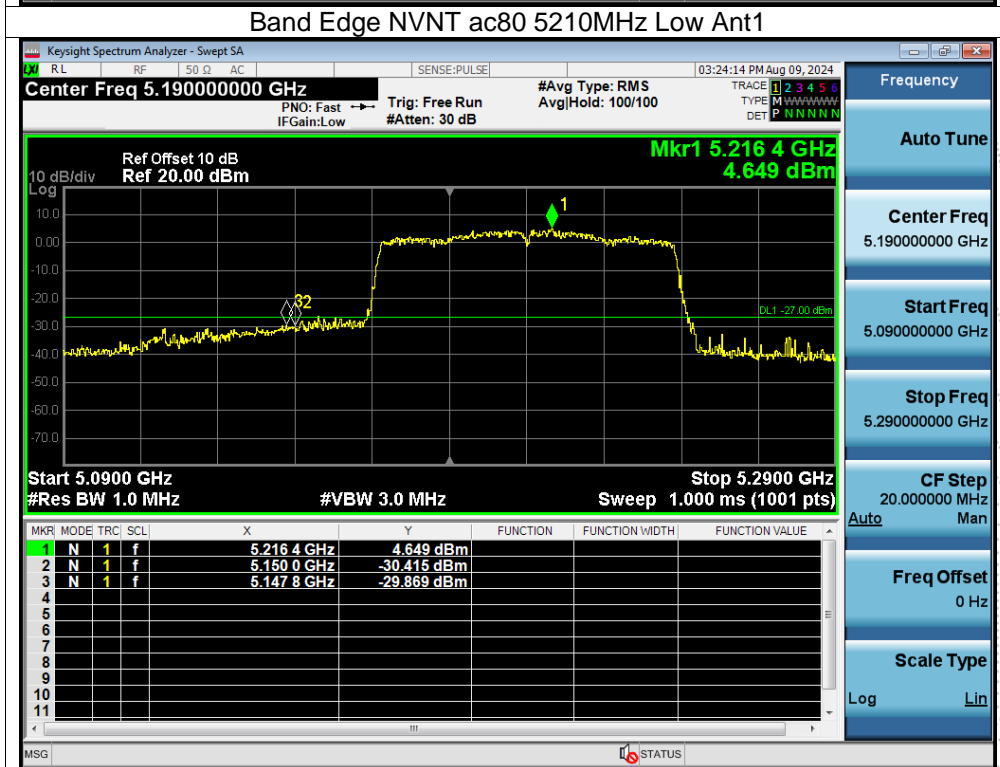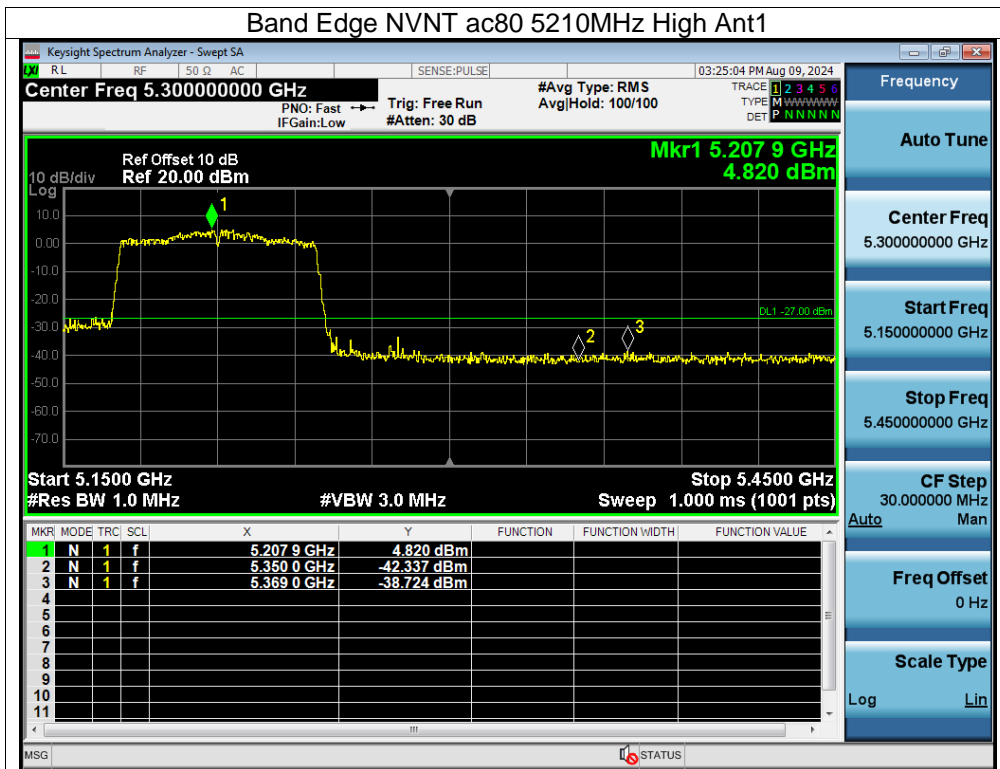

12. Spurious RF Conducted Emissions

12.1 Block Diagram Of Test Setup



12.2 Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge..

12.3 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



12.4 Test Result



Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.



About:26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5180-5240MHz


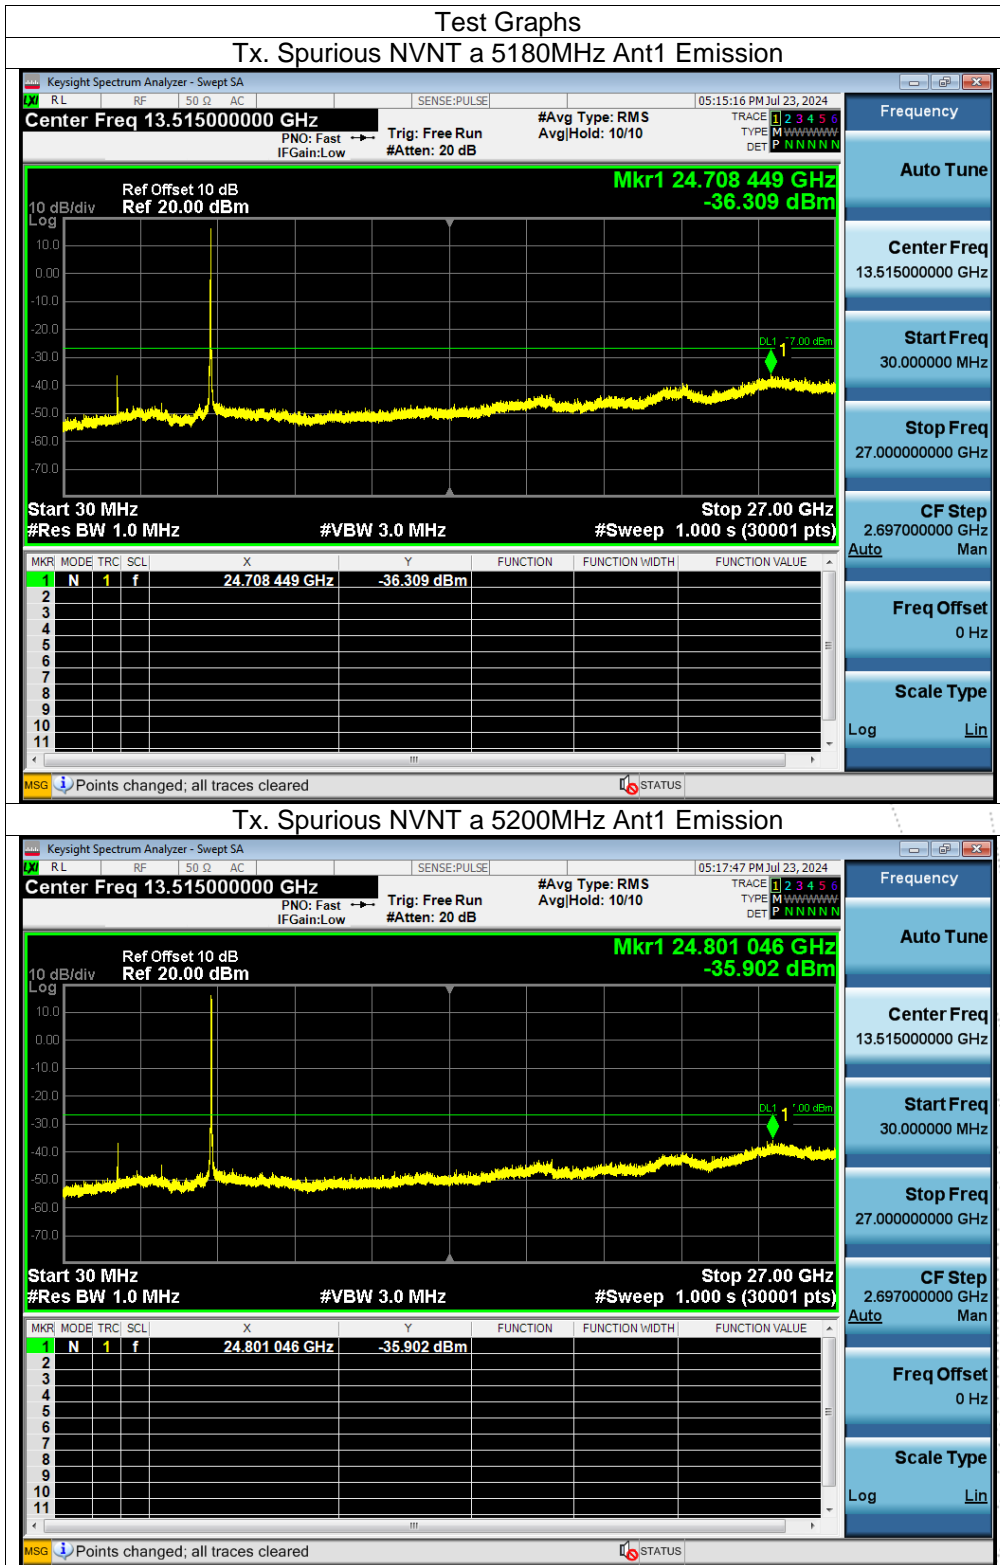


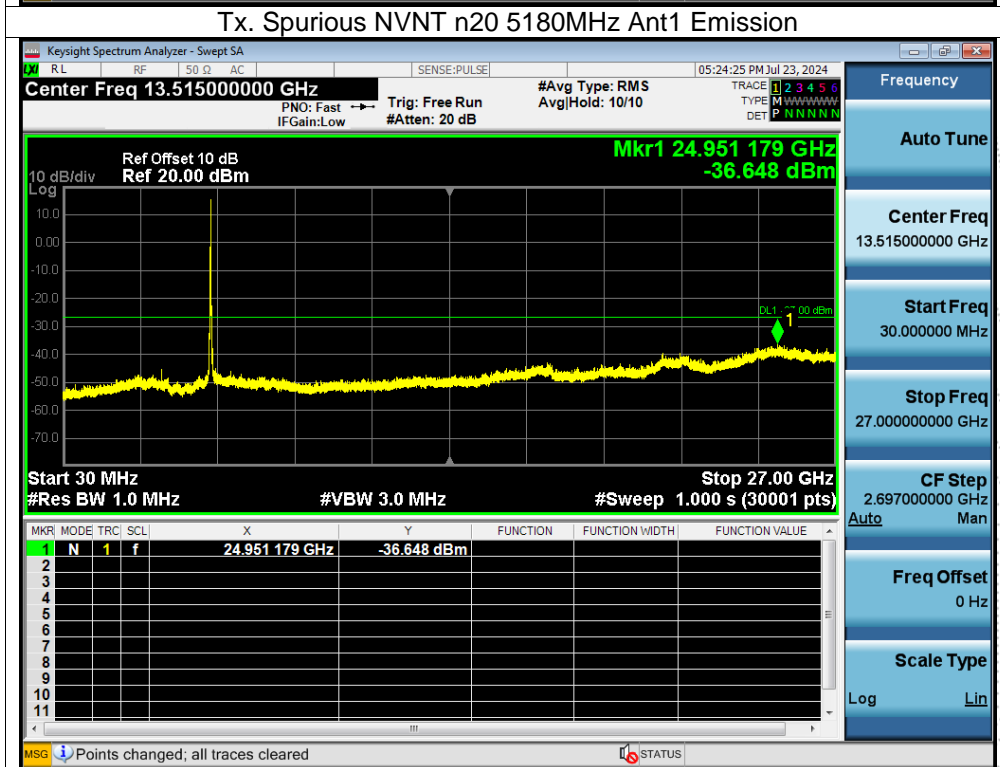
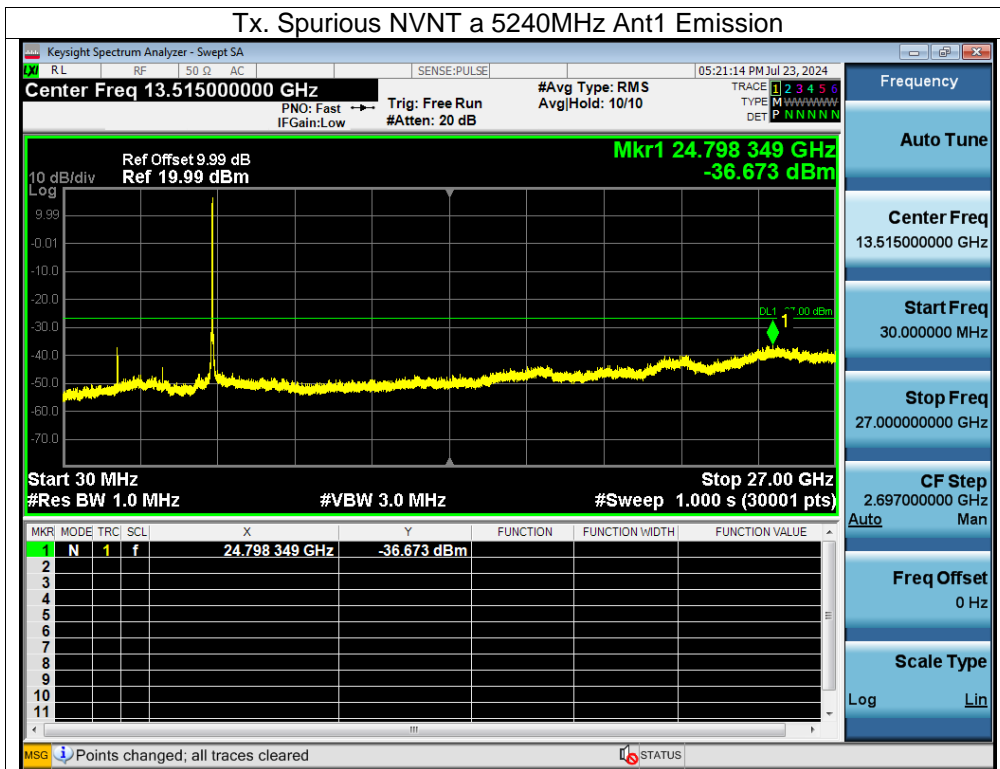


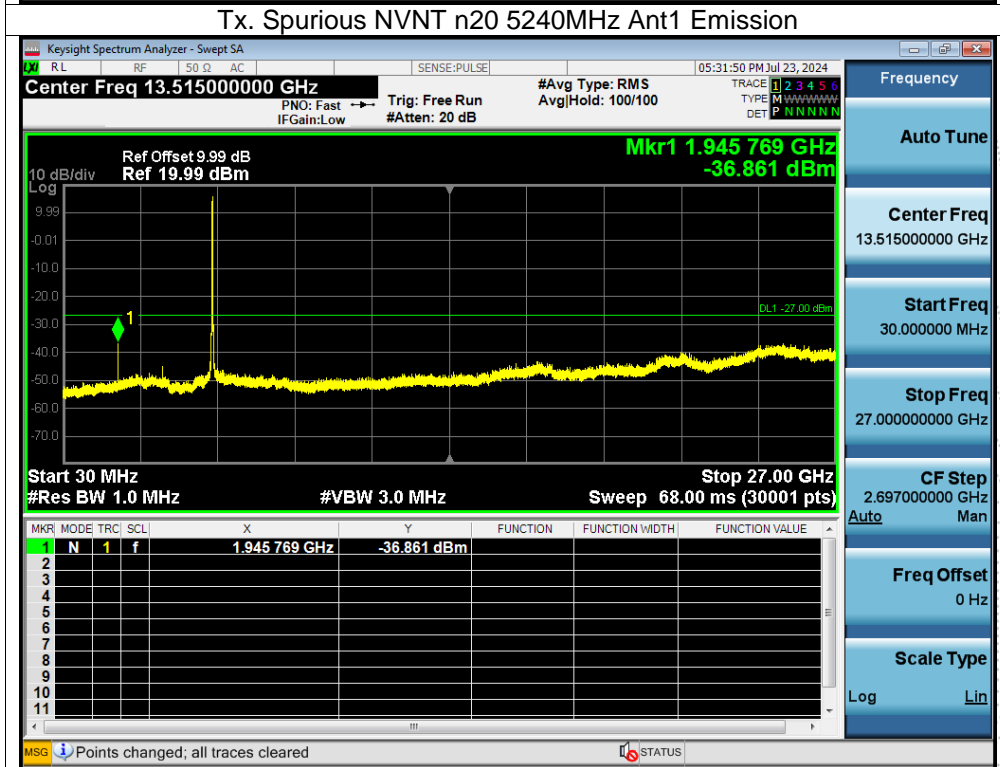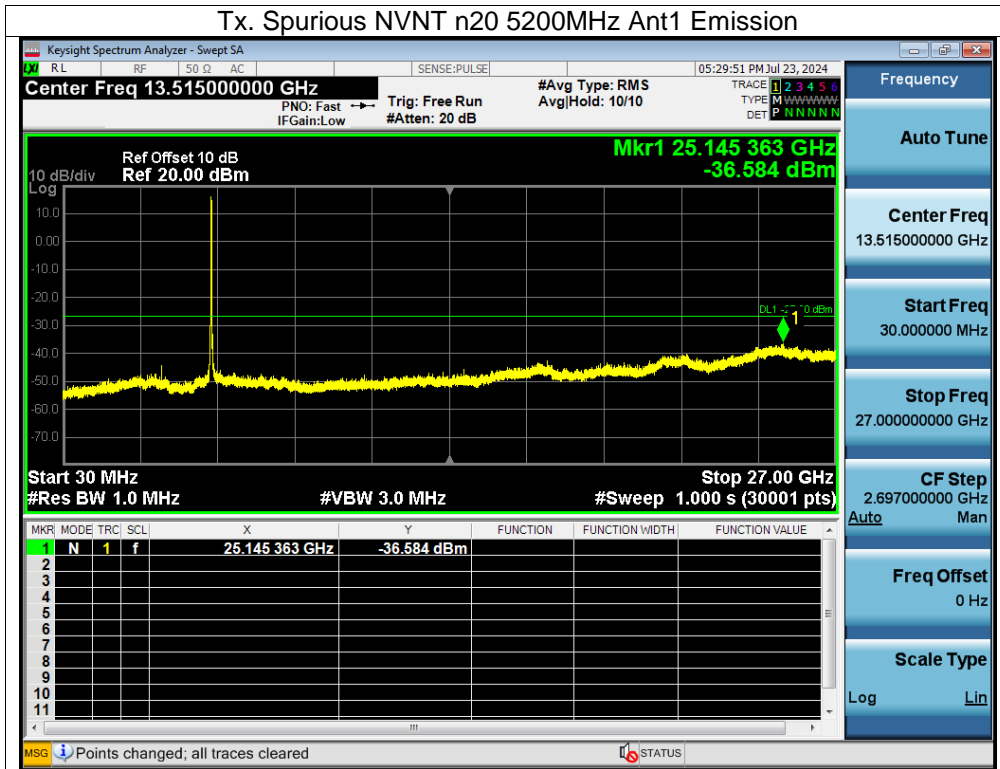

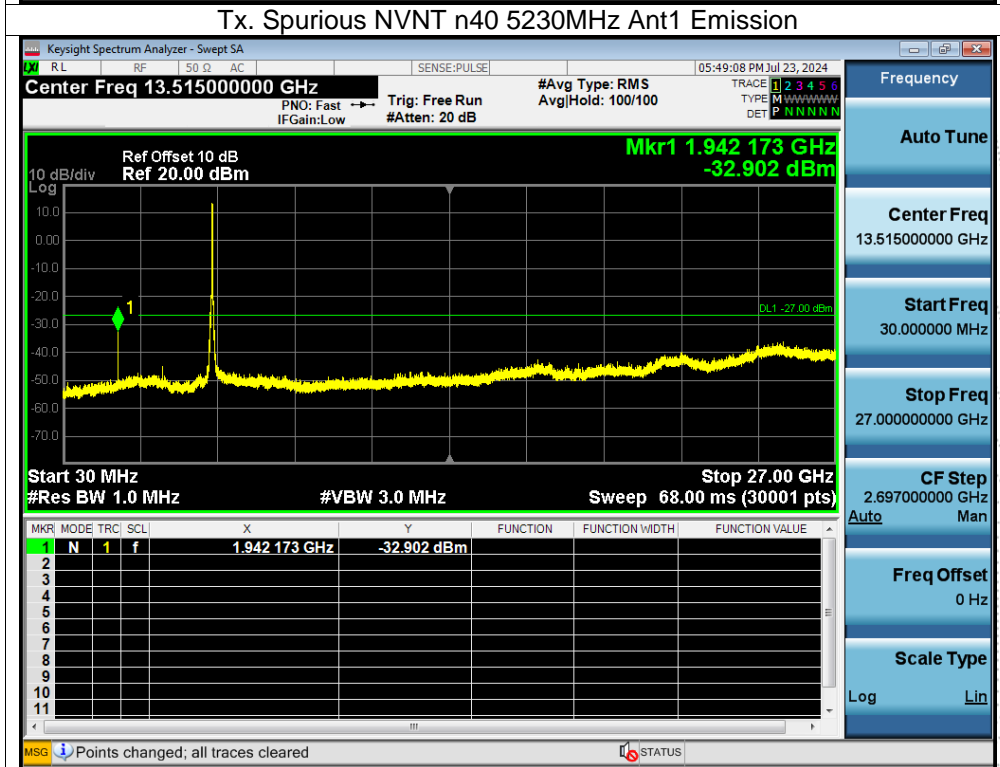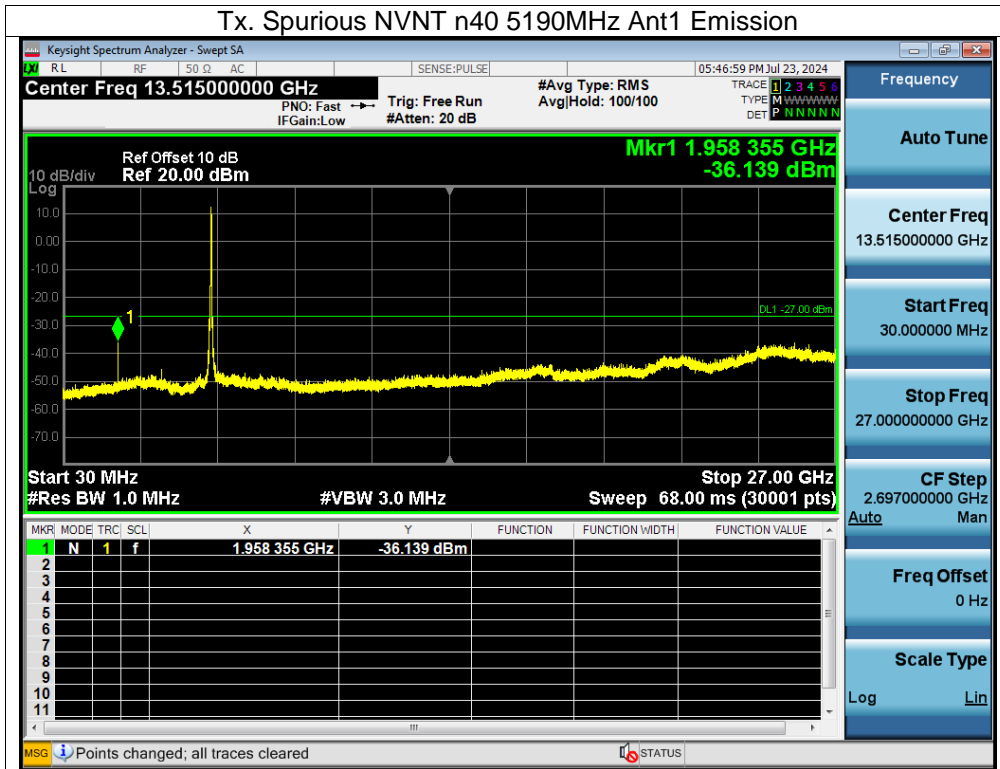

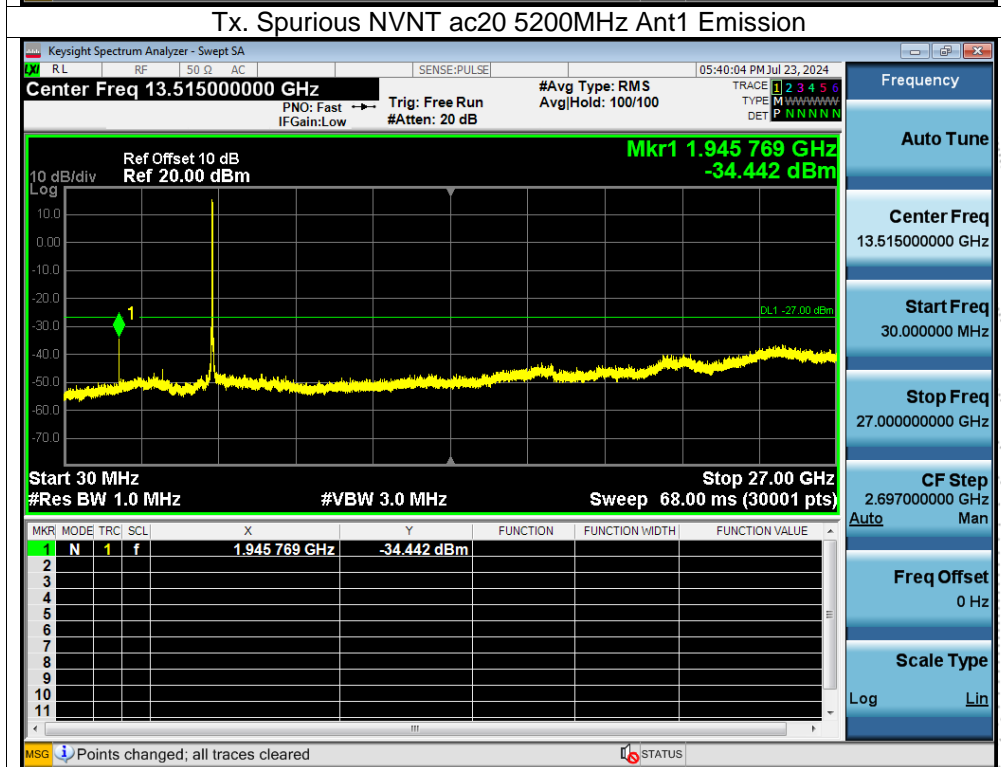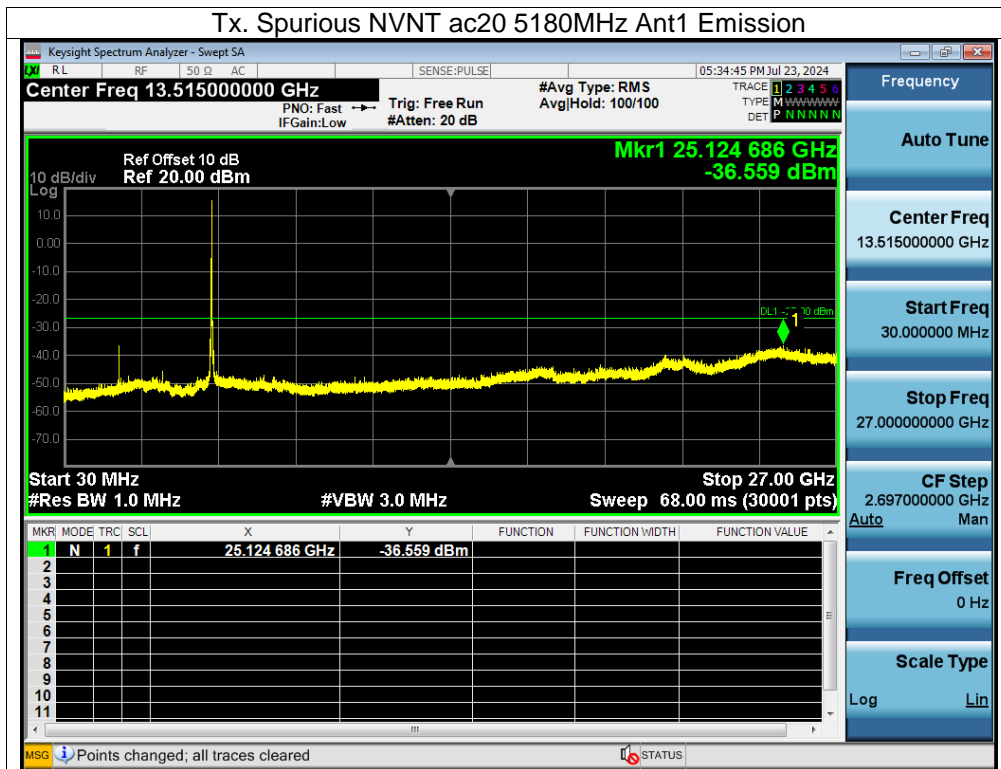


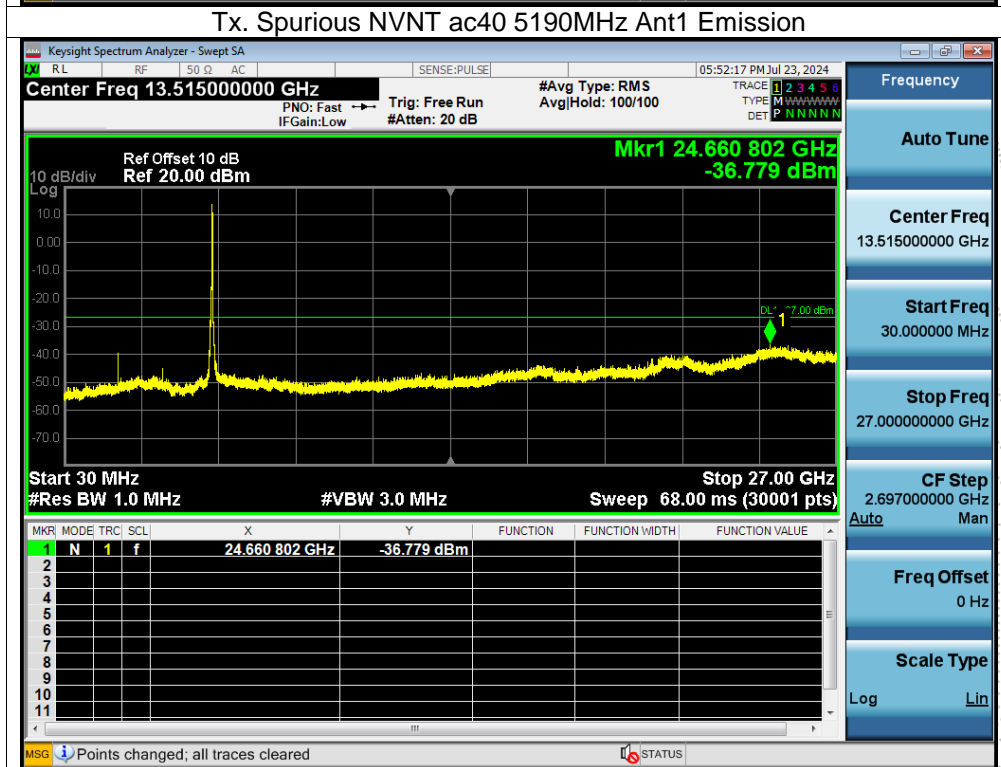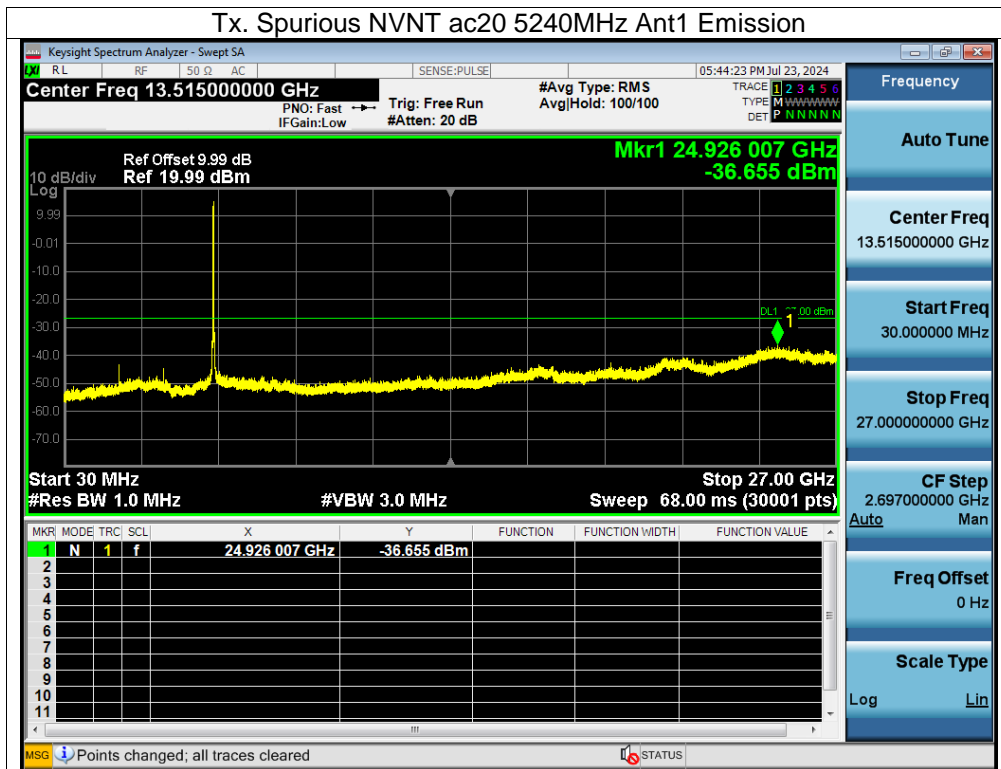

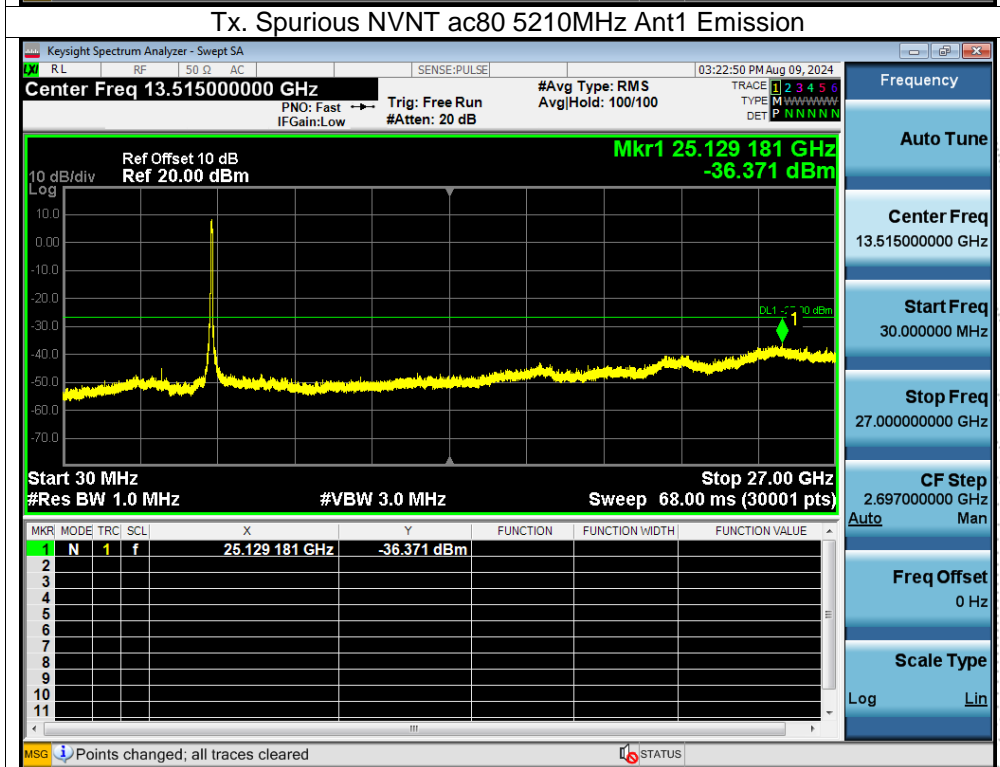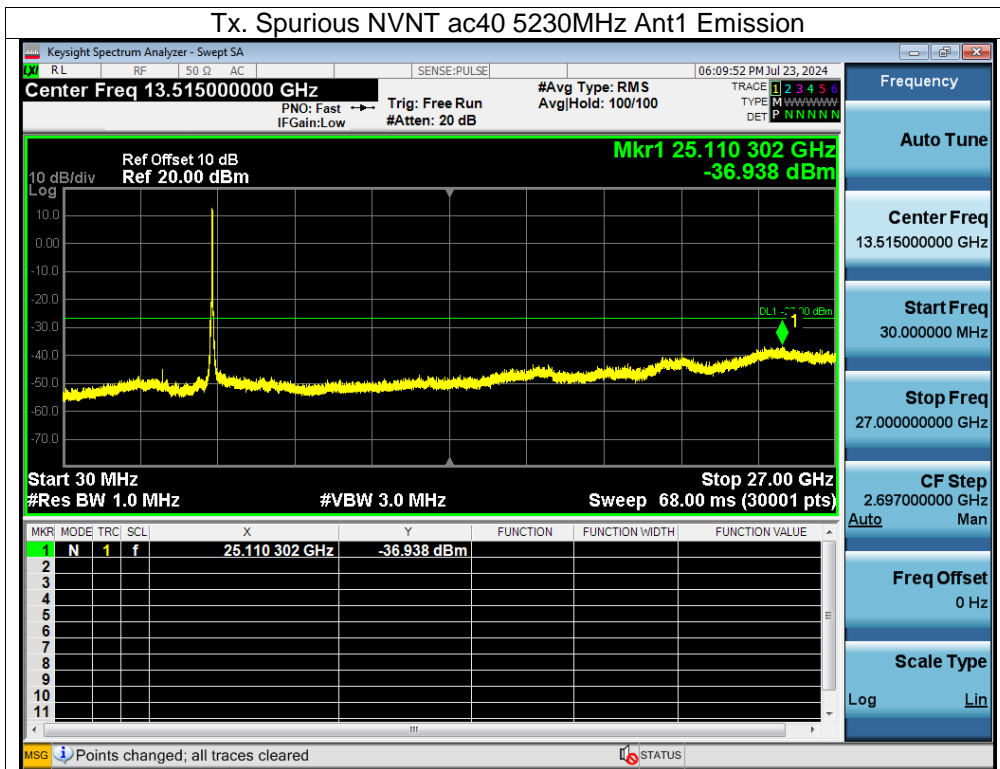

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup

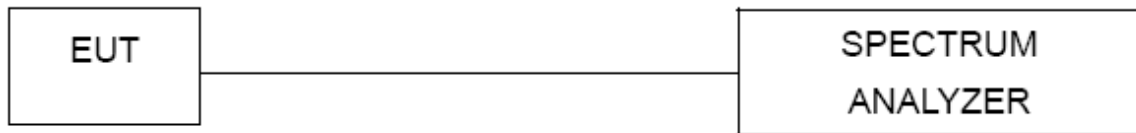

13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60HZ
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5180.0174	5180	0.0174	3.3528
		V max (V)	138.00	5180.0092	5180	0.0092	1.7806
		V min (V)	102.00	5180.0131	5180	0.0131	2.5292
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0107	5180	0.0107	2.0570
		T (°C)	-10	5180.0084	5180	0.0084	1.6263
		T (°C)	0	5180.0070	5180	0.0070	1.3522
		T (°C)	10	5180.0023	5180	0.0023	0.4366
		T (°C)	20	5180.0074	5180	0.0074	1.4355
		T (°C)	30	5180.0006	5180	0.0006	0.1066
		T (°C)	40	5180.0043	5180	0.0043	0.8264
		T (°C)	50	5180.0064	5180	0.0064	1.2272
		T (°C)	60	5180.0046	5180	0.0046	0.8887
		T (°C)	70	5180.0063	5180	0.0063	1.2257
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5200.0029	5200	0.0029	0.5655
		V max (V)	138.00	5200.0039	5200	0.0039	0.7419
		V min (V)	102.00	5200.0106	5200	0.0106	2.0434
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.00752	5200	0.00752	1.4465
		T (°C)	-10	5200.00567	5200	0.00567	1.0911
		T (°C)	0	5200.01160	5200	0.01160	2.2301
		T (°C)	10	5200.01321	5200	0.01321	2.5401
		T (°C)	20	5200.01233	5200	0.01233	2.3712
		T (°C)	30	5200.00512	5200	0.00512	0.9843
		T (°C)	40	5200.01191	5200	0.01191	2.2898
		T (°C)	50	5200.00054	5200	0.00054	0.1041
		T (°C)	60	5200.00683	5200	0.00683	1.3133
		T (°C)	70	5200.00663	5200	0.00663	1.2759
Limits				5150-5250 MHz			
Result				Complies			

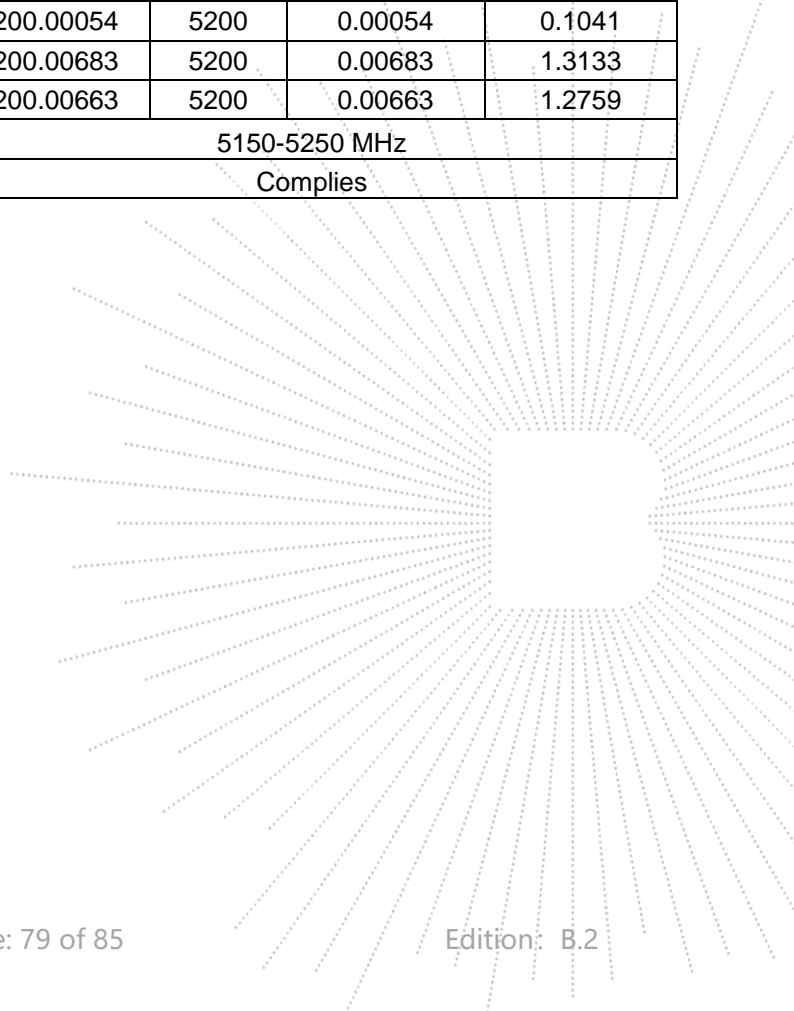


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5240.0014	5240	0.0014	0.2667
		V max (V)	138.00	5240.0132	5240	0.0132	2.5160
		V min (V)	102.00	5240.0071	5240	0.0071	1.3599
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0016	5240	0.0016	0.3011
		T (°C)	-10	5240.0129	5240	0.0129	2.4606
		T (°C)	0	5240.0066	5240	0.0066	1.2566
		T (°C)	10	5240.0071	5240	0.0071	1.3557
		T (°C)	20	5240.0015	5240	0.0015	0.2824
		T (°C)	30	5240.0091	5240	0.0091	1.7274
		T (°C)	40	5240.0069	5240	0.0069	1.3255
		T (°C)	50	5240.0060	5240	0.0060	1.1418
		T (°C)	60	5240.0119	5240	0.0119	2.2630
		T (°C)	70	5240.0134	5240	0.0134	2.5498
Limits				5150-5250 MHz			
Result				Complies			

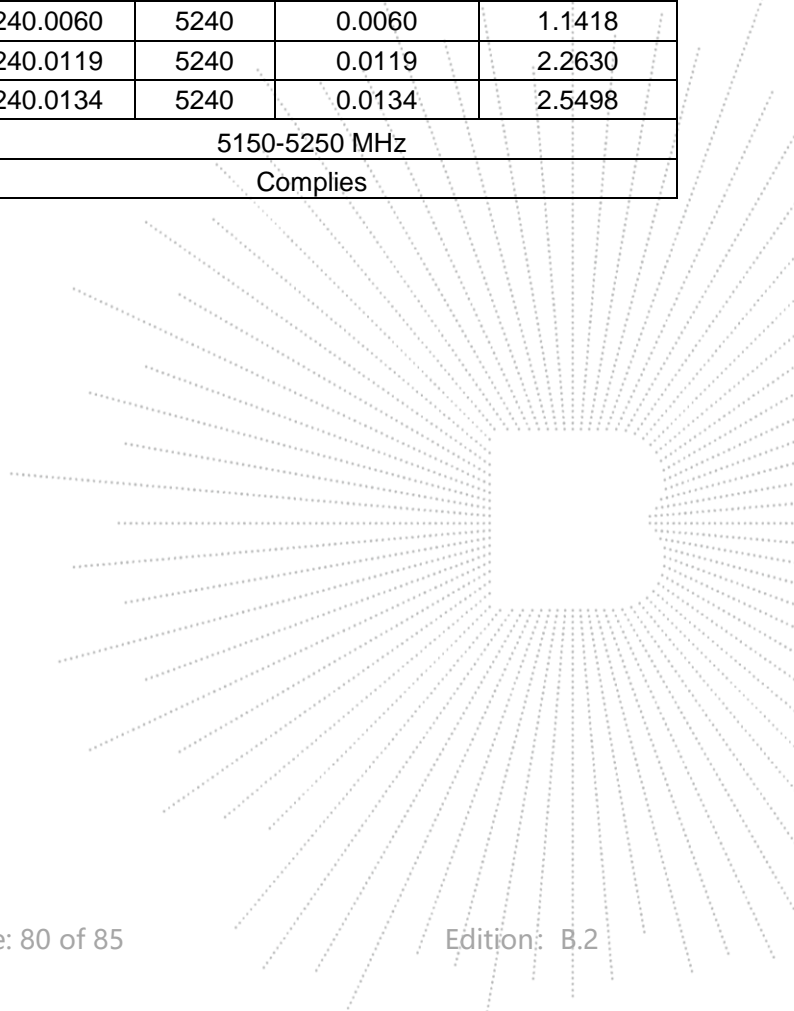

14. Duty Cycle Of Test Signal

14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

14.2 Formula

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

14.3 Test Procedure

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

14.4 Test Result

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	100	0	0
NVNT	a	5200	100	0	0
NVNT	a	5240	100	0	0
NVNT	n20	5180	100	0	0
NVNT	n20	5200	100	0	0
NVNT	n20	5240	100	0	0
NVNT	n40	5190	100	0	0
NVNT	n40	5230	100	0	0
NVNT	ac20	5180	100	0	0
NVNT	ac20	5200	100	0	0
NVNT	ac20	5240	100	0	0
NVNT	ac40	5190	100	0	0
NVNT	ac40	5230	100	0	0
NVNT	ac80	5210	100	0	0


15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


15.2 Test Result

The EUT antenna is internal antenna, fulfill the requirement of this section.


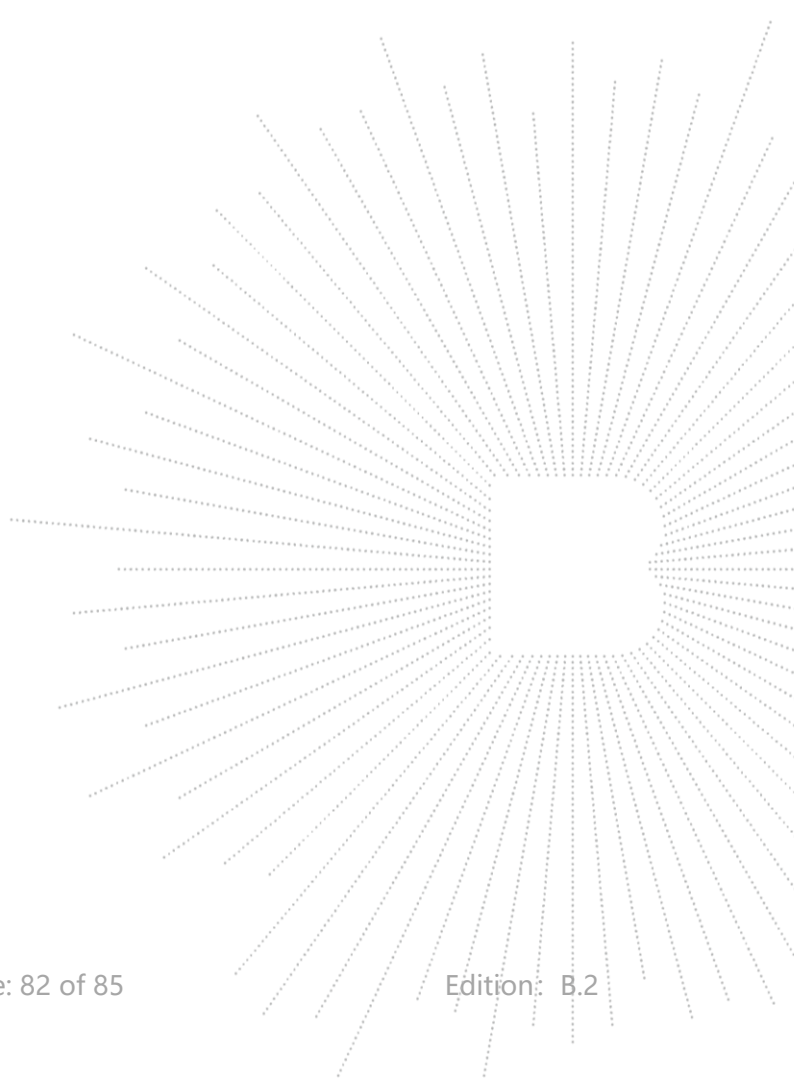


16. EUT Test Setup Photographs

Conducted emissions

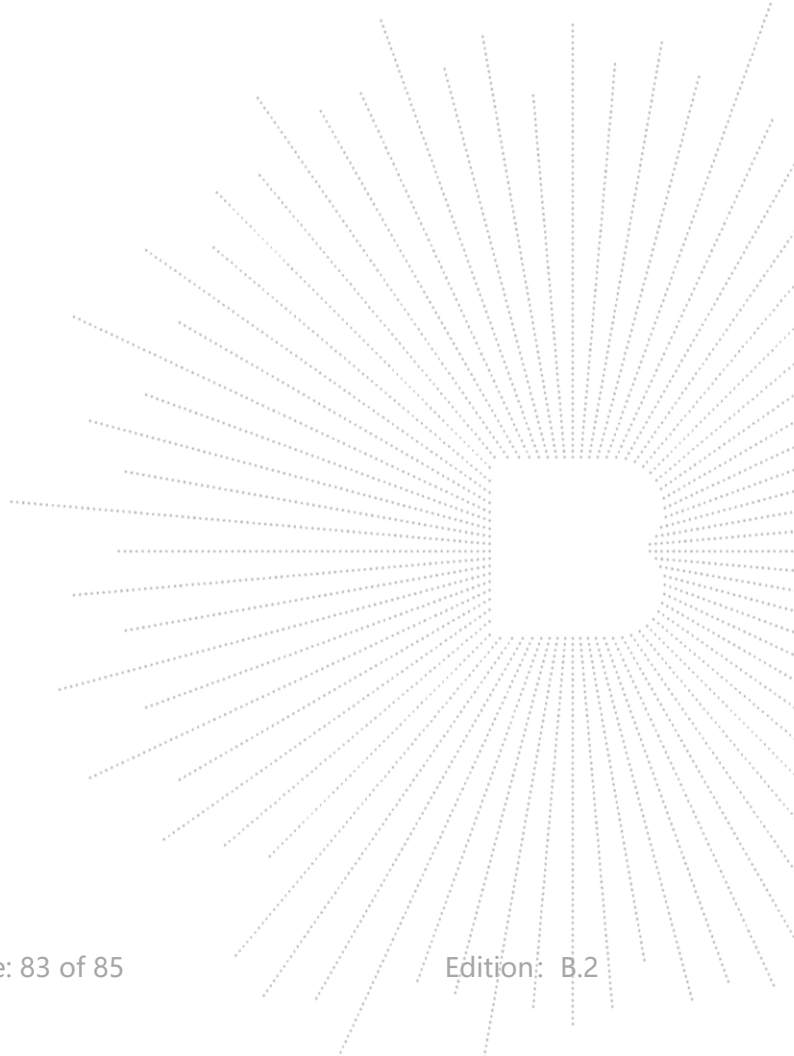

Radiated Measurement Photos

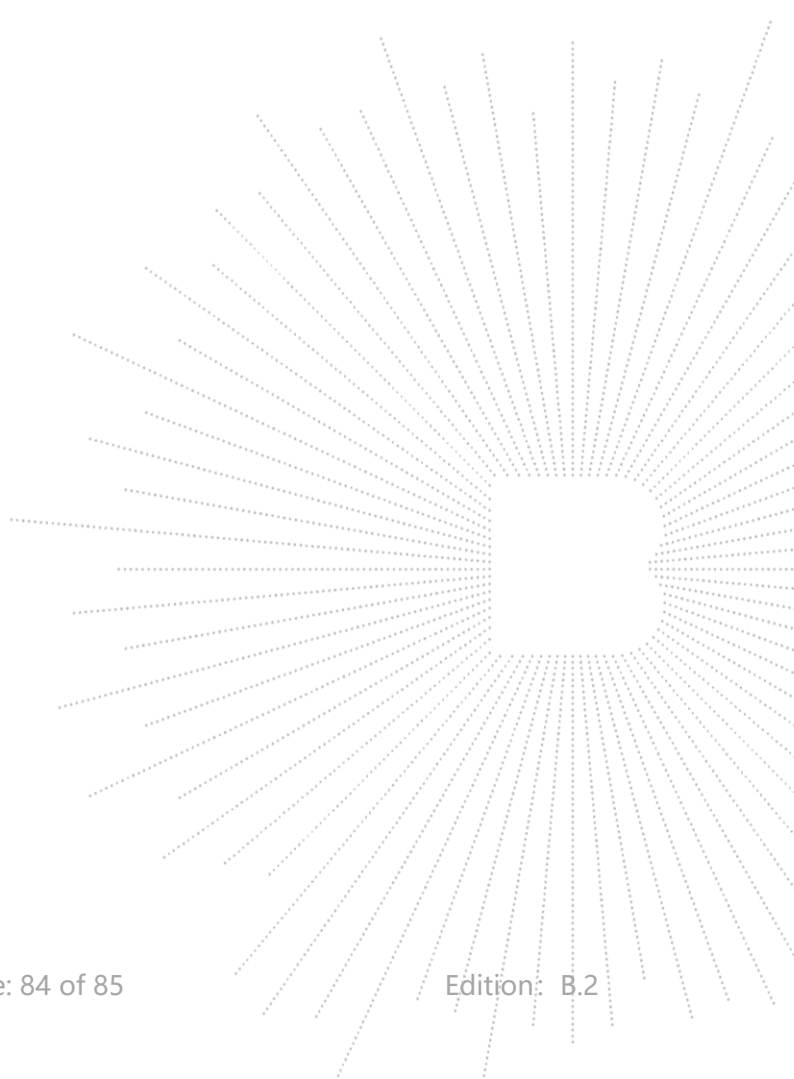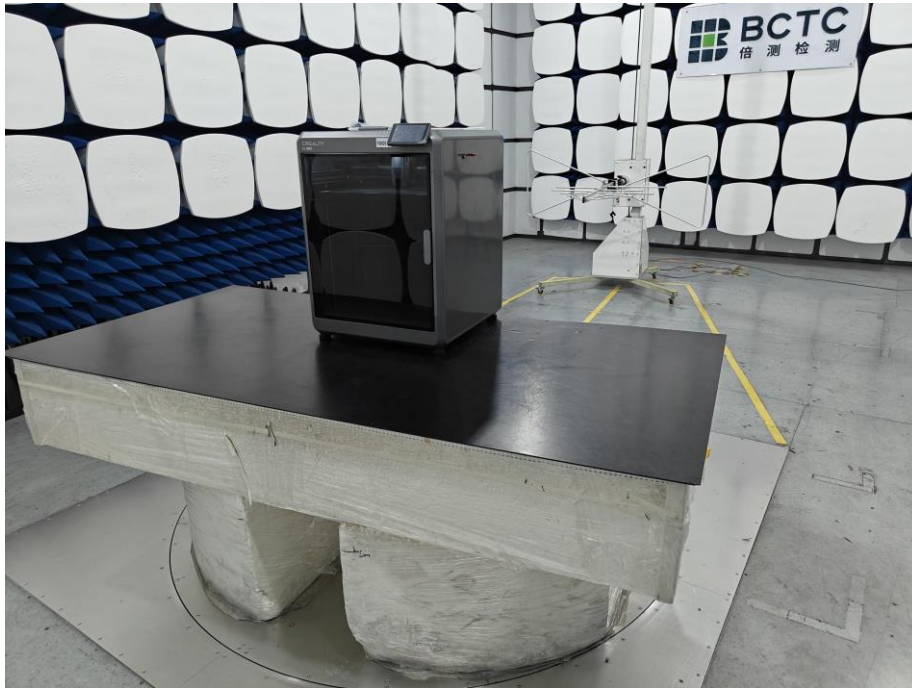

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****

