




802.11 ax40 CH03 (2422MHz)

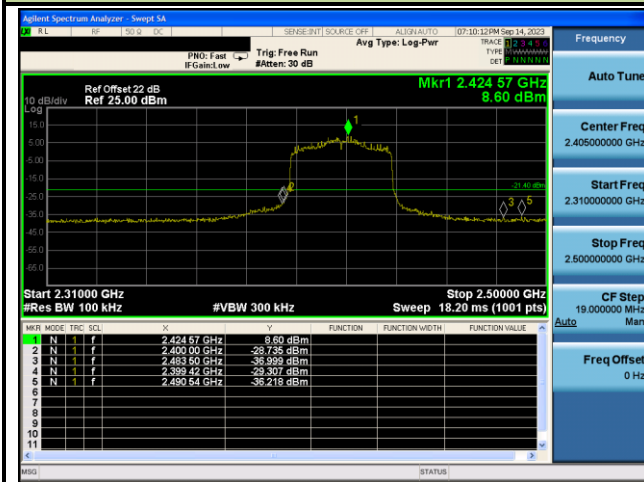


802.11 ax40 CH03 (2422MHz)

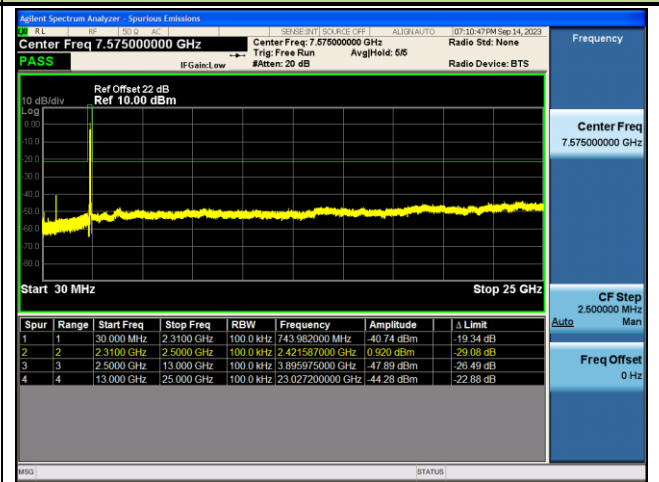


802.11 ax40 CH06 (2437MHz)

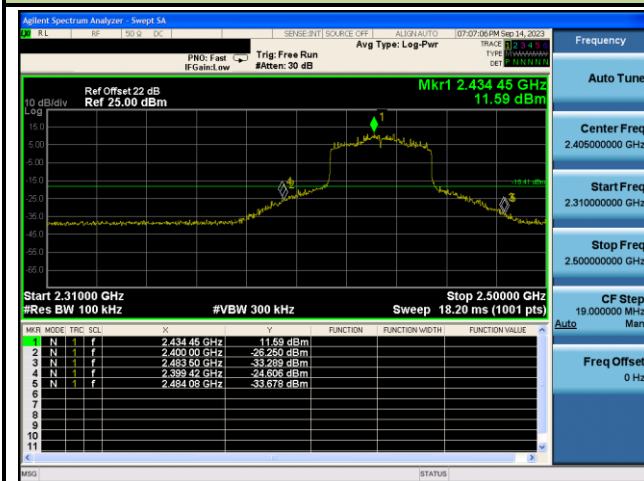


802.11 ax40 CH06 (2437MHz)

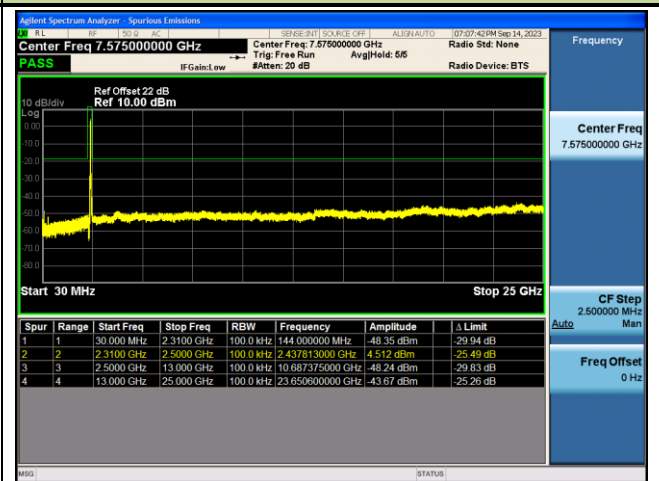

802.11 ax40 CH09 (2452MHz)

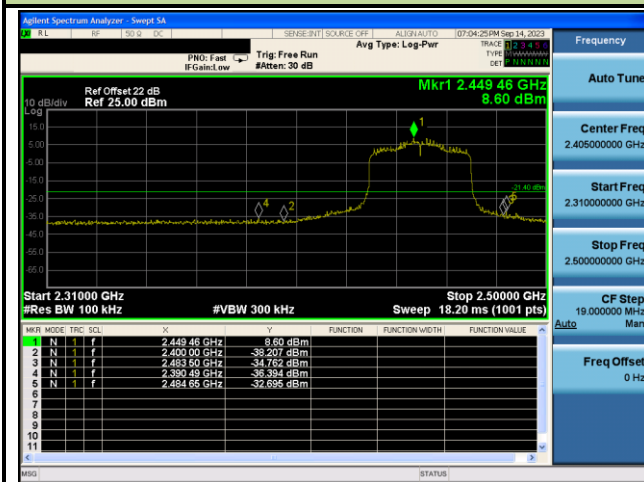

802.11 ax40 CH09 (2452MHz)

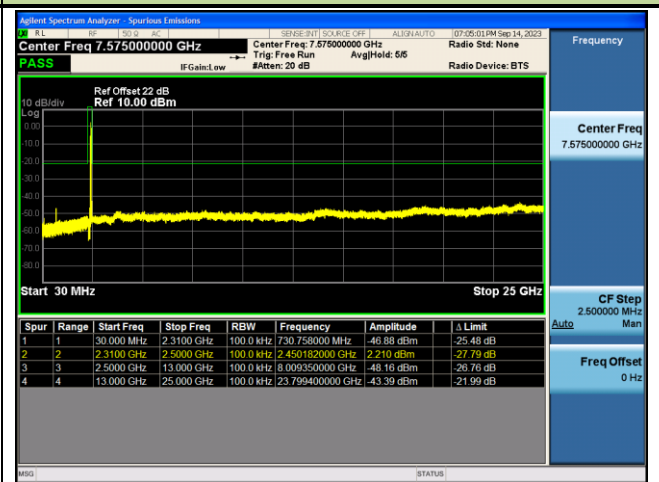

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = RMS
5. Sweep time = auto couple
6. Trace mode = Average hold (100 times)
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB: duty cycle is < 98%)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. EUT duty cycle is < 98%, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

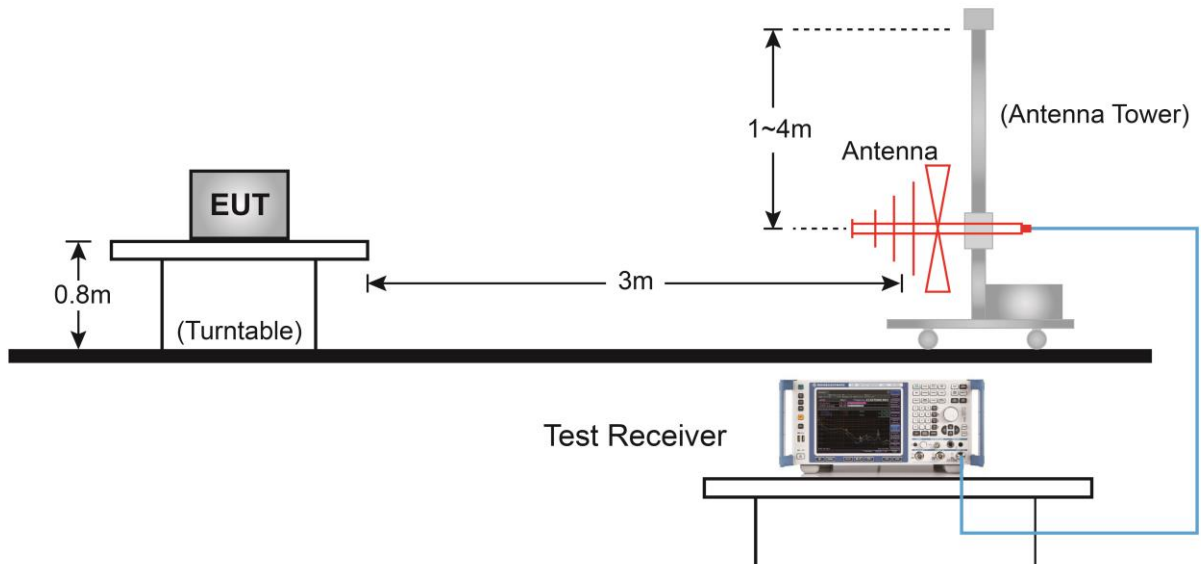


Above 1GHz Test Setup:

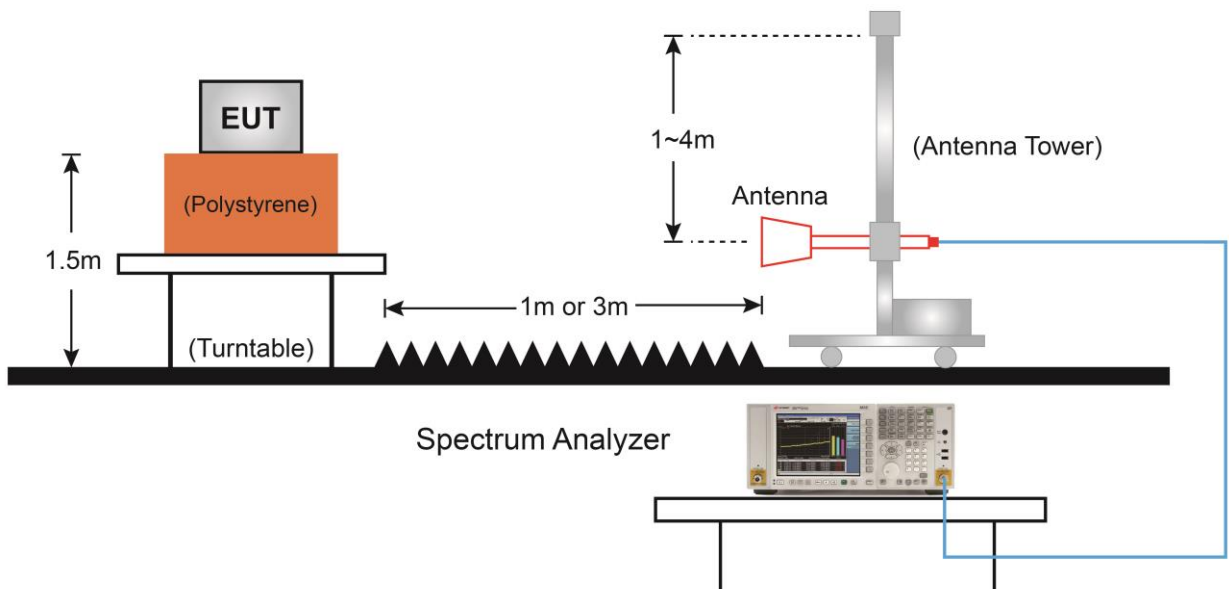

7.6.5. Test Result

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	VULB 9162	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

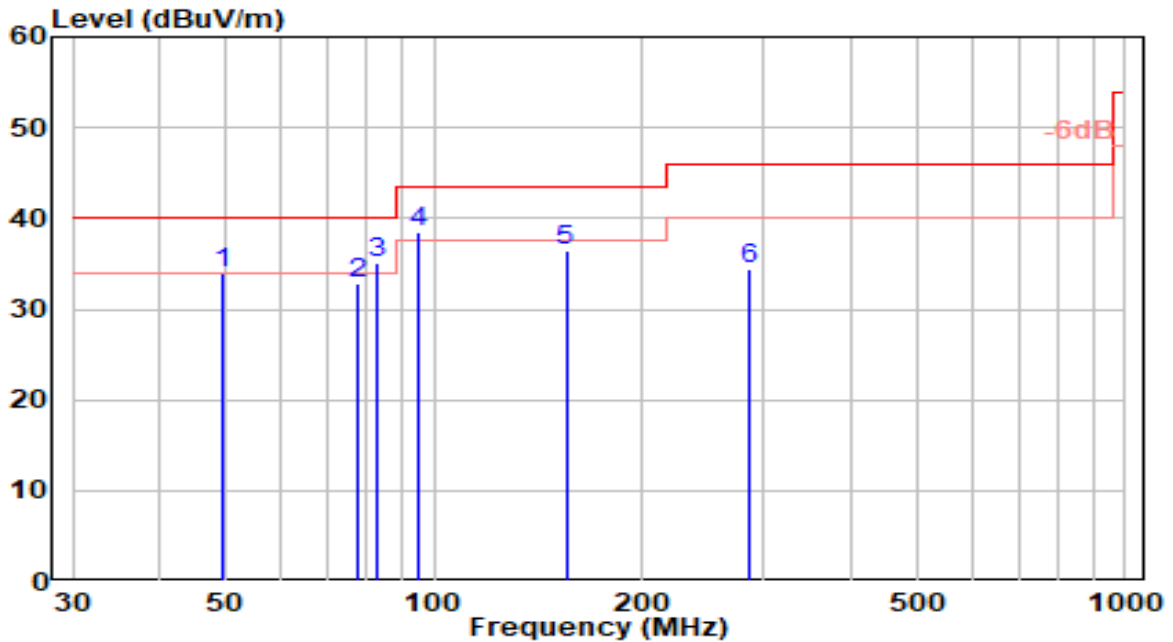


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	49.400	13.41	20.66	34.07	-5.93	40.00	200	360	QP
2	77.530	18.90	13.94	32.84	-7.16	40.00	200	291	QP
3	* 82.380	21.00	14.20	35.20	-4.80	40.00	200	284	QP
4	94.990	21.00	17.55	38.55	-4.95	43.50	150	284	QP
5	155.130	21.27	15.23	36.50	-7.00	43.50	200	58	QP
6	287.050	14.12	20.26	34.38	-11.62	46.00	100	142	QP

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	VULB 9162	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

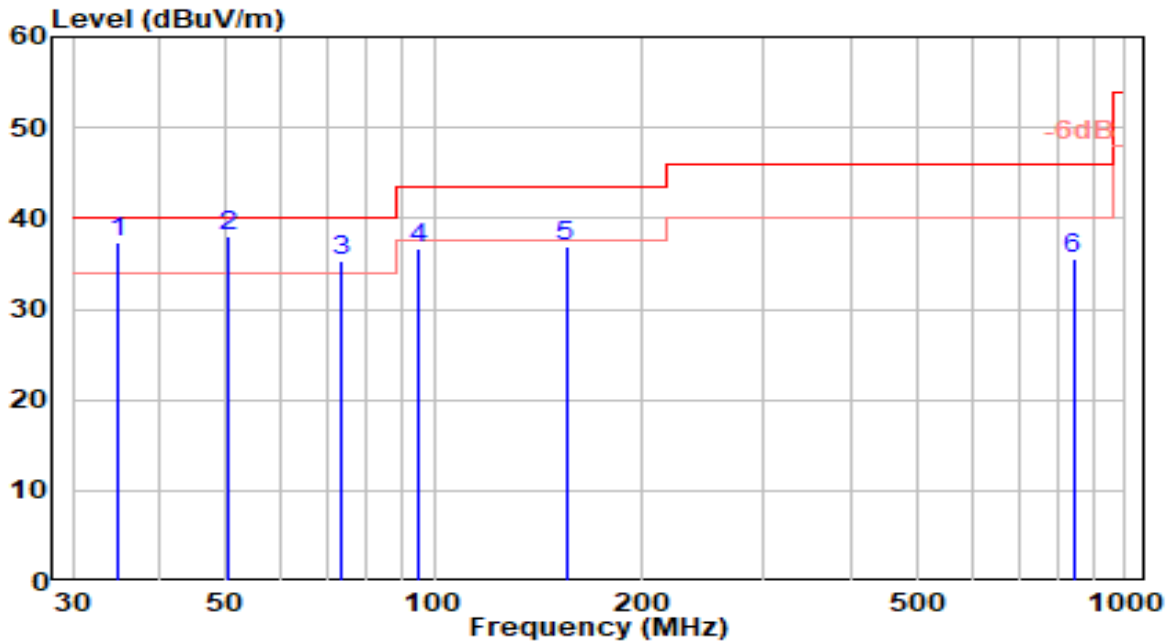


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	34.850	19.80	17.52	37.32	-2.68	40.00	100	265	QP
2	* 50.370	17.50	20.64	38.14	-1.86	40.00	100	171	QP
3	73.650	20.50	14.77	35.27	-4.73	40.00	200	324	QP
4	94.990	19.16	17.55	36.71	-6.79	43.50	100	309	QP
5	155.130	21.64	15.23	36.87	-6.63	43.50	100	234	QP
6	840.920	5.10	30.34	35.45	-10.55	46.00	138	360	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

ffEUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

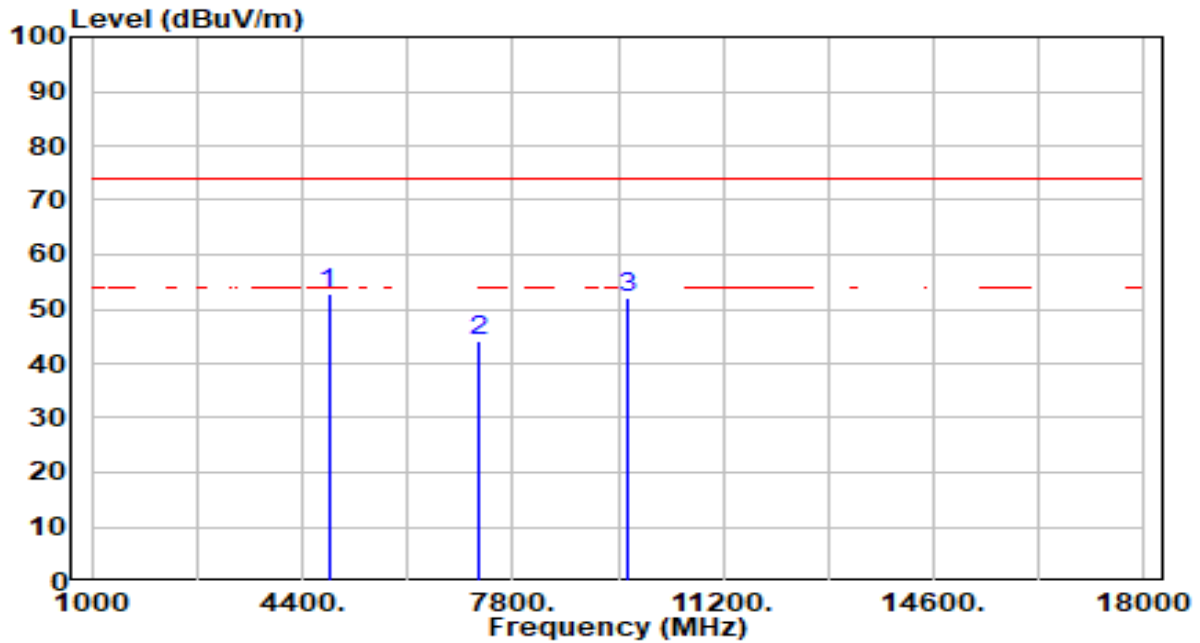


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	54.09	-1.23	52.86	-21.14	74.00	100	26	Peak
2		7236.000	40.01	4.16	44.17	-29.83	74.00	100	360	Peak
3		9648.000	48.90	3.29	52.19	-21.81	74.00	200	323	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

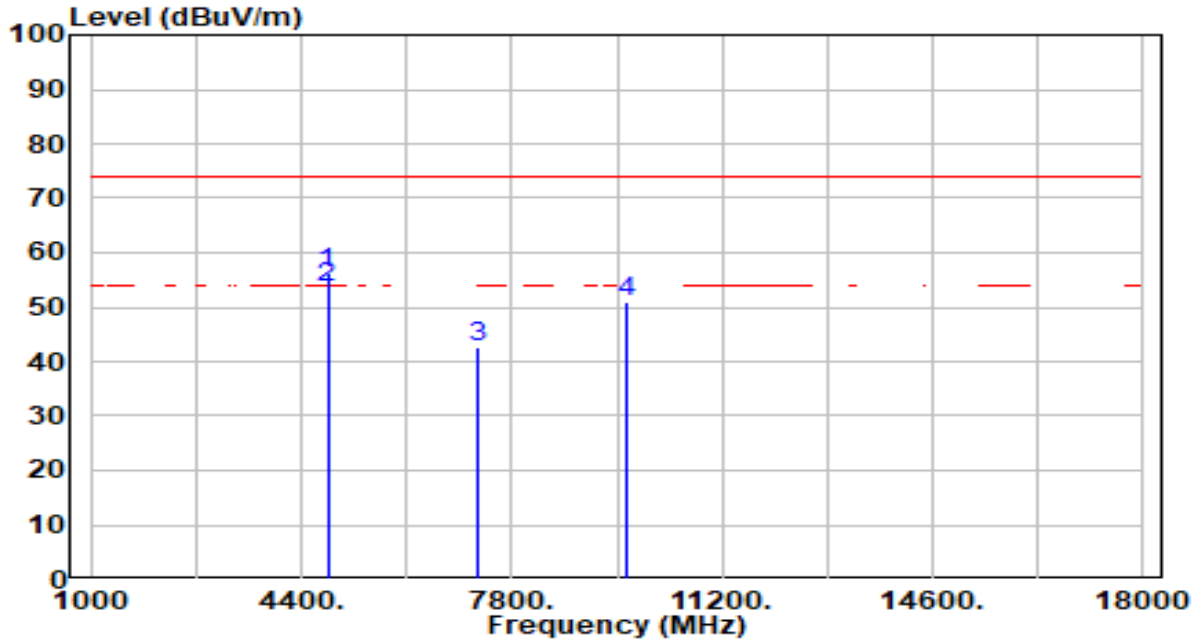


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4824.000	57.48	-1.23	56.25	-17.75	74.00	238	356	Peak
2	* 4824.000	55.00	-1.23	53.77	-0.23	54.00	238	356	Average
3	7236.000	38.36	4.16	42.52	-31.48	74.00	263	0	Peak
4	9648.000	47.74	3.29	51.03	-22.97	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

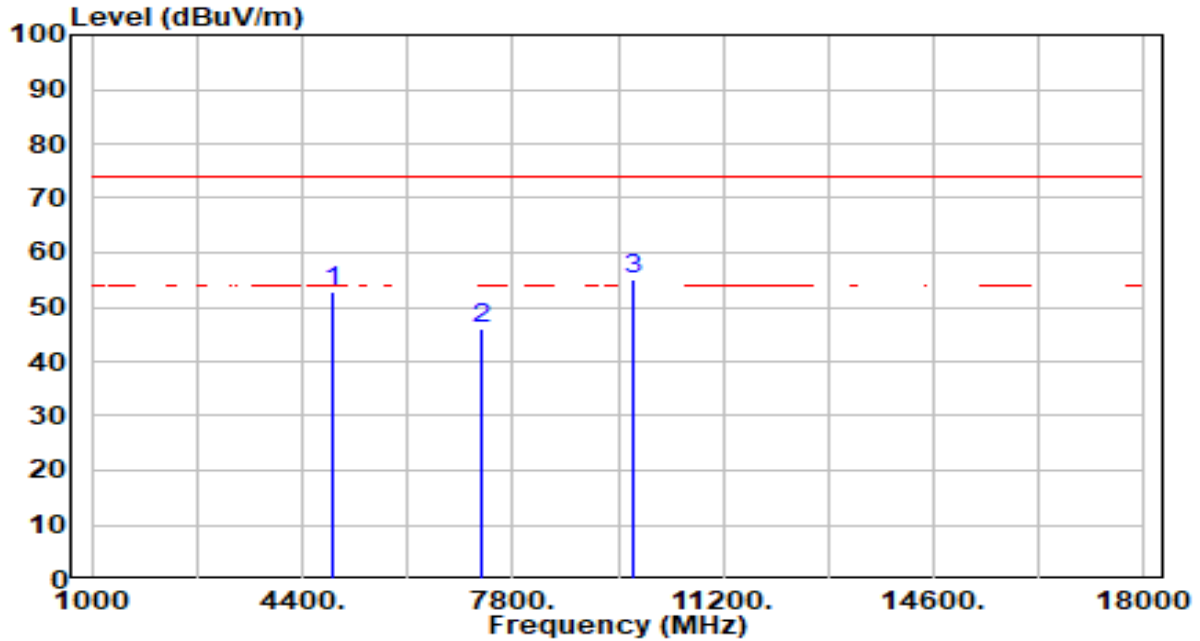


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	54.11	-1.13	52.99	-21.01	74.00	100	19	Peak
2	7311.000	42.01	4.14	46.14	-27.86	74.00	300	259	Peak
3	* 9748.000	51.81	3.33	55.14	-18.86	74.00	200	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

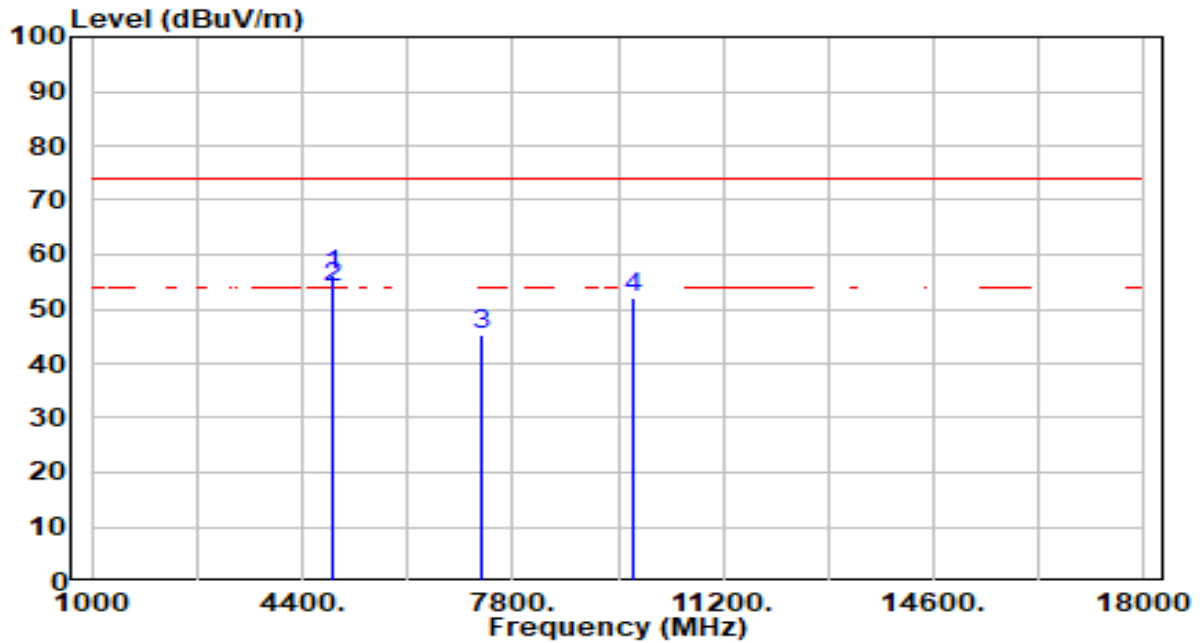


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	57.36	-1.13	56.23	-17.77	74.00	179	141	Peak
2	*	4874.000	54.98	-1.13	53.85	-0.15	54.00	179	141	Average
3		7311.000	41.17	4.14	45.30	-28.70	74.00	300	360	Peak
4		9748.000	48.68	3.33	52.01	-21.99	74.00	100	150	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

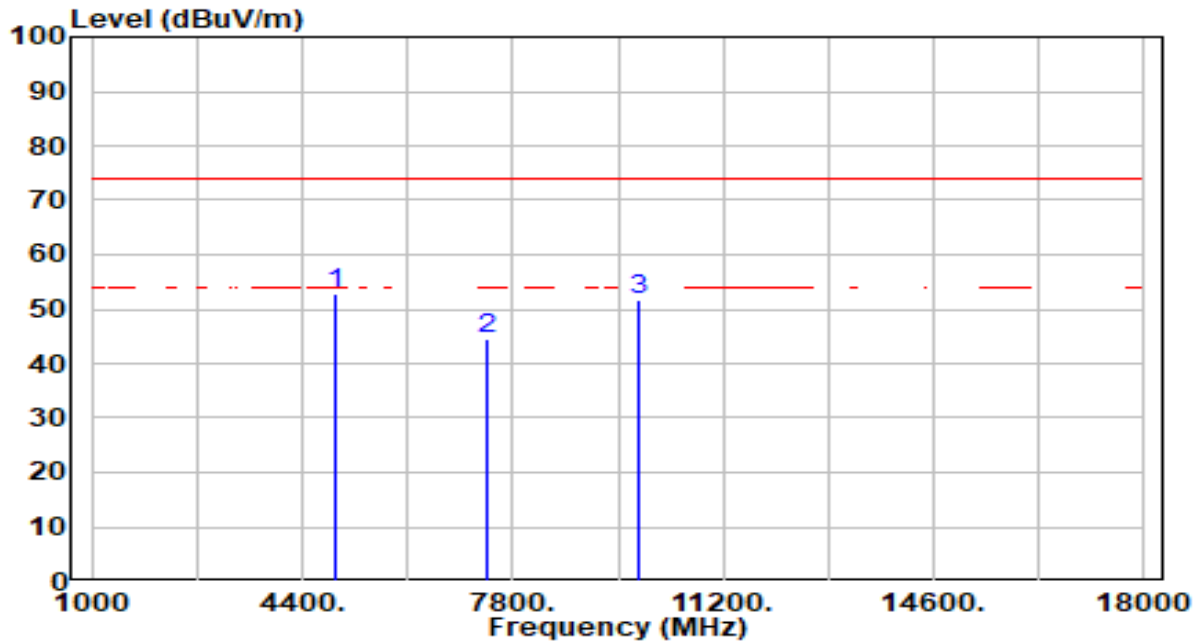


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4924.000	53.88	-1.03	52.85	-21.15	74.00	100	19	Peak
2	7386.000	40.54	4.11	44.66	-29.34	74.00	200	60	Peak
3	9848.000	48.42	3.39	51.81	-22.19	74.00	200	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

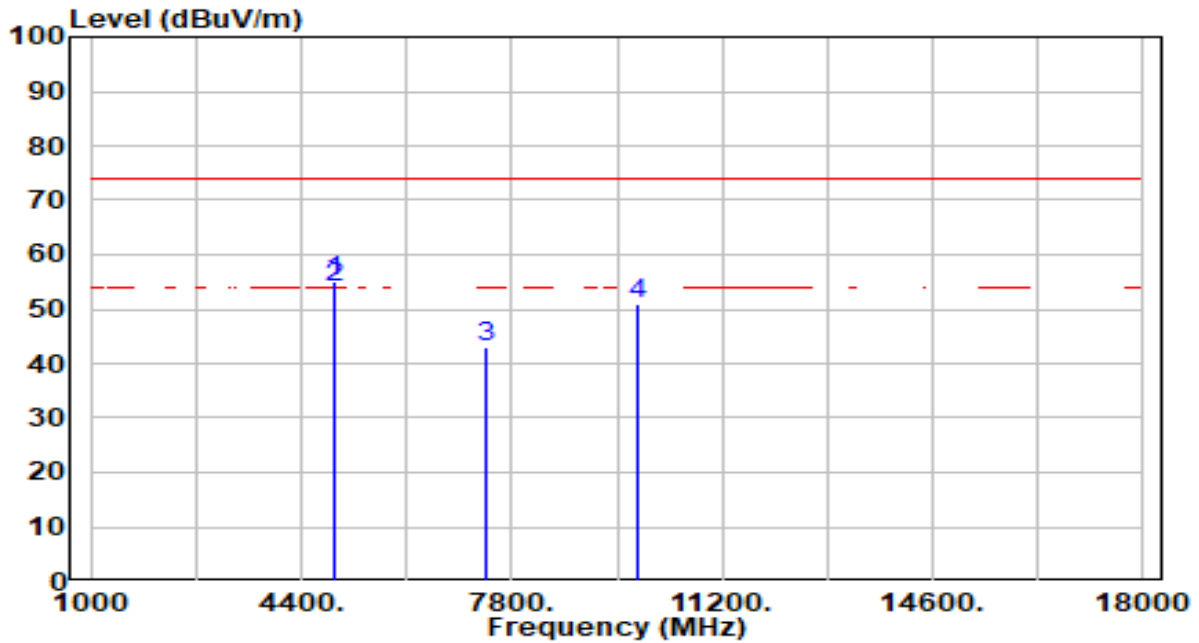


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4924.000	56.12	-1.03	55.09	-18.91	74.00	186	133	Peak
2	* 4924.000	54.88	-1.03	53.85	-0.15	54.00	186	133	Average
3	7386.000	38.77	4.11	42.88	-31.12	74.00	242	360	Peak
4	9848.000	47.45	3.39	50.84	-23.16	74.00	100	150	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

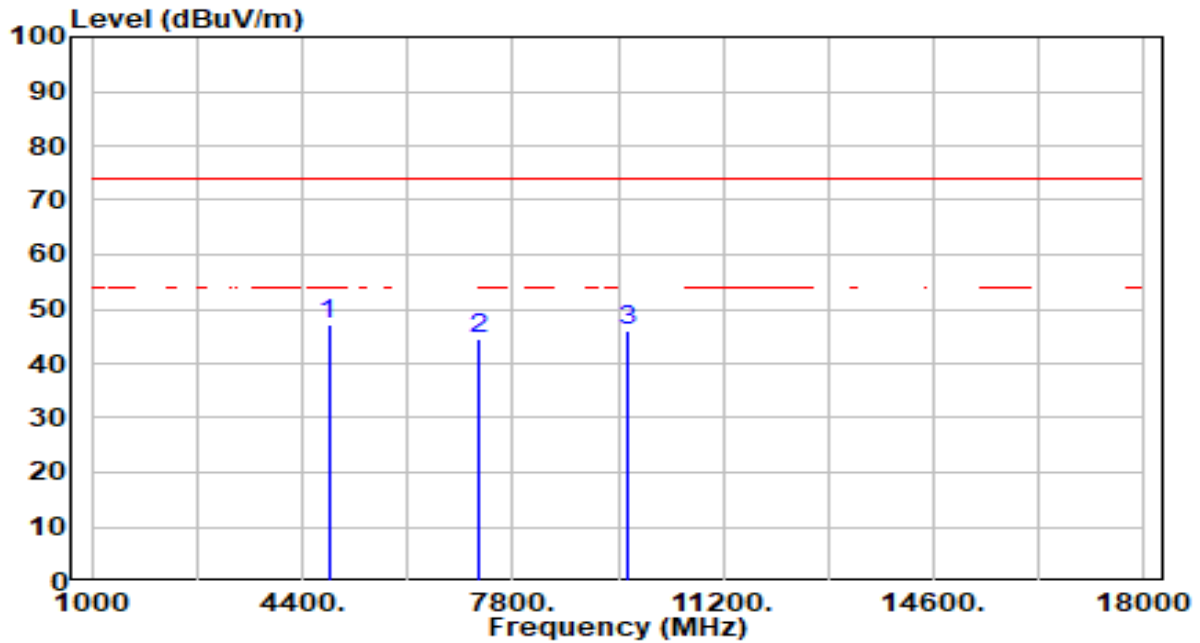


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	48.23	-1.23	47.00	-27.00	74.00	100	6	Peak
2		40.37	4.16	44.53	-29.47	74.00	200	210	Peak
3		42.83	3.29	46.12	-27.88	74.00	100	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

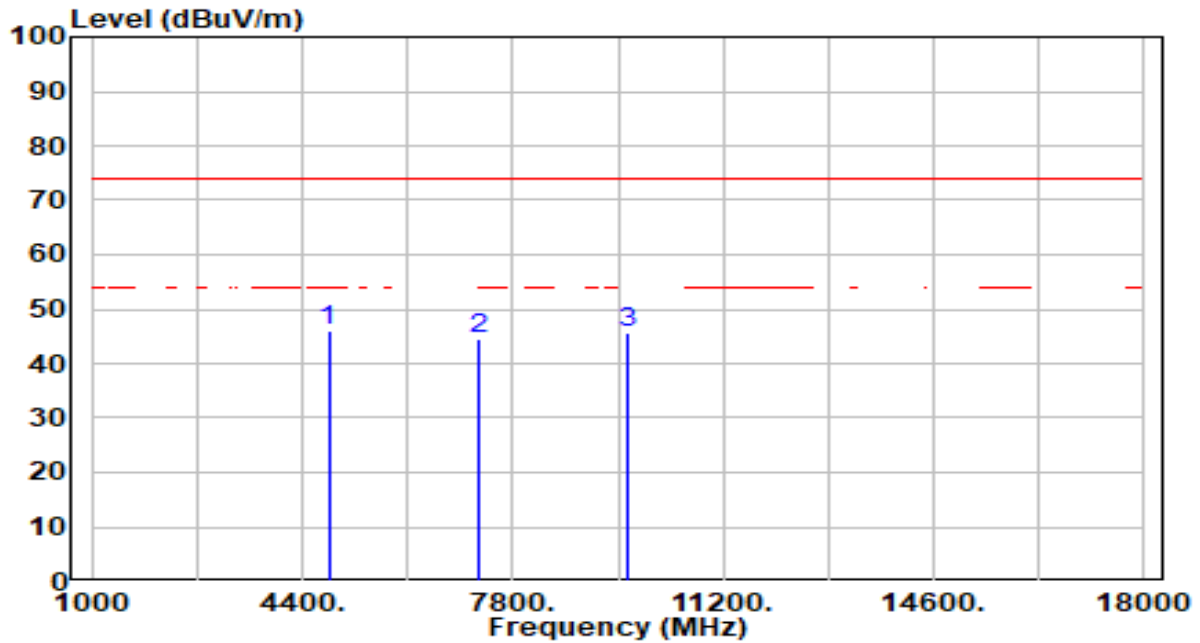


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	47.39	-1.23	46.17	-27.83	74.00	200	125	Peak
2		40.38	4.16	44.54	-29.46	74.00	100	192	Peak
3		42.31	3.29	45.60	-28.40	74.00	120	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

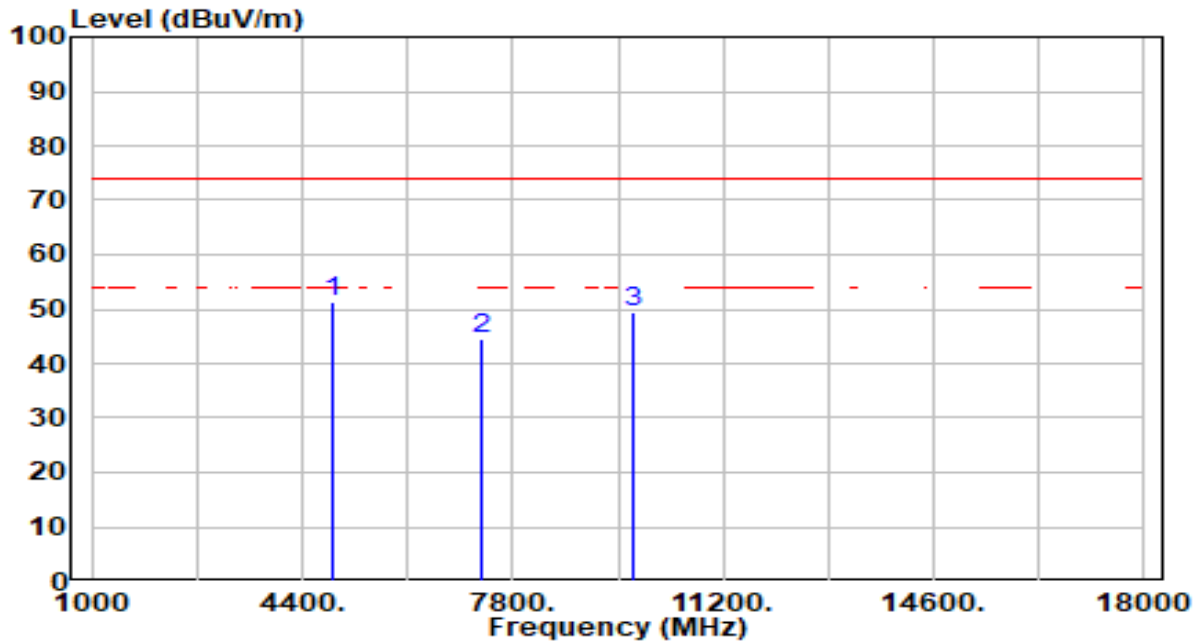


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	52.52	-1.13	51.39	-22.61	74.00	146	360	Peak
2		7311.000	40.23	4.14	44.37	-29.63	74.00	200	249	Peak
3		9748.000	45.98	3.33	49.31	-24.69	74.00	178	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

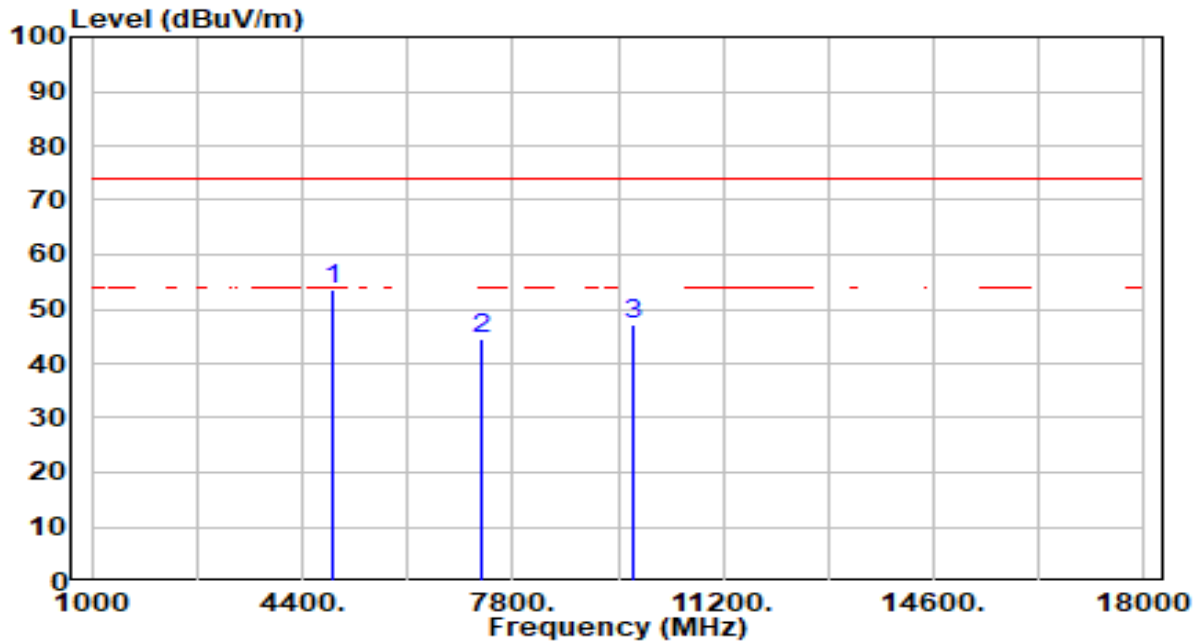


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	54.77	-1.13	53.64	-20.36	74.00	300	130	Peak
2		7311.000	40.54	4.14	44.68	-29.32	74.00	200	338	Peak
3		9748.000	43.85	3.33	47.18	-26.83	74.00	111	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

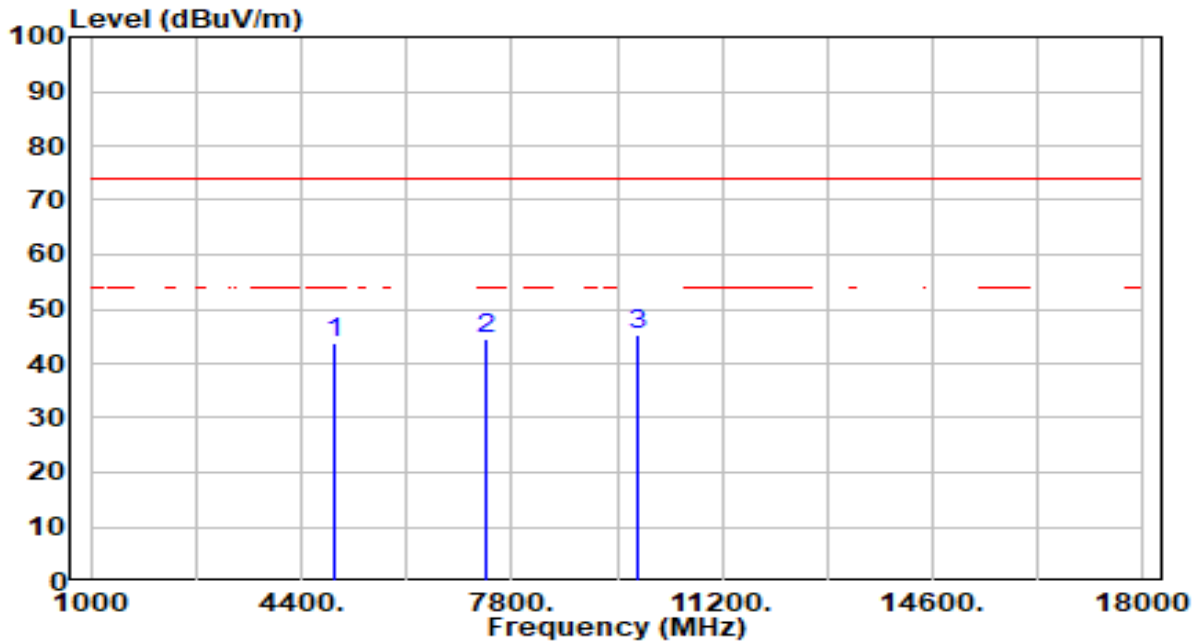


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	44.67	-1.03	43.64	-30.36	74.00	100	359	Peak
2	7386.000	40.23	4.11	44.35	-29.65	74.00	200	306	Peak
3	* 9848.000	42.05	3.39	45.44	-28.56	74.00	100	64	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

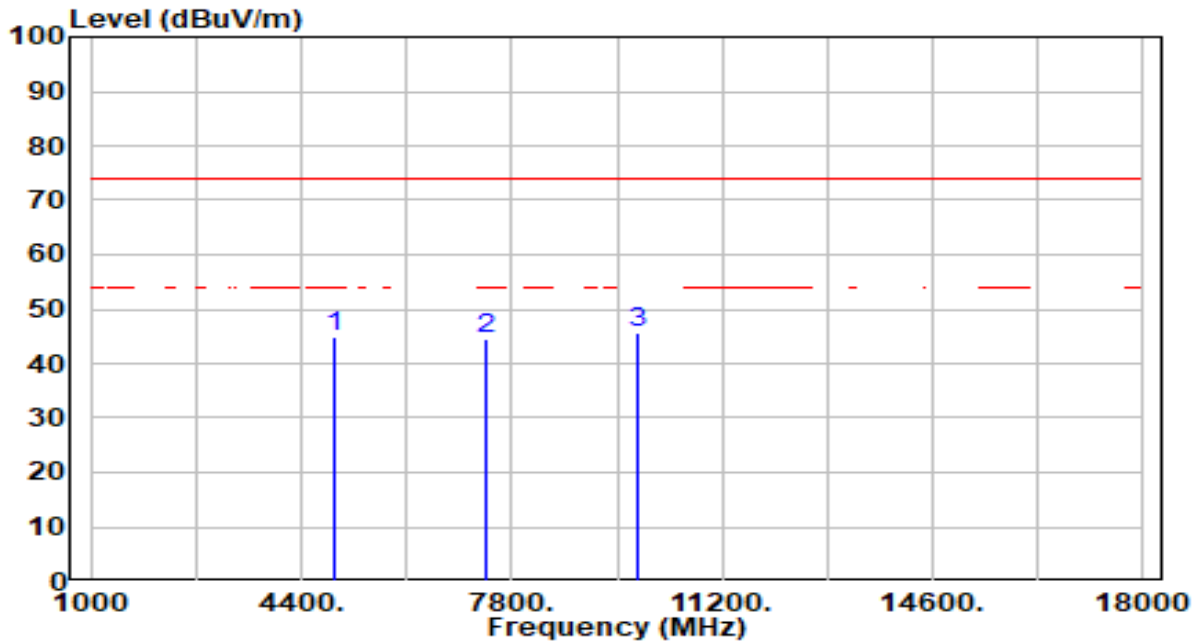


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.98	-1.03	44.95	-29.05	74.00	200	111	Peak
2	7386.000	40.58	4.11	44.69	-29.31	74.00	100	360	Peak
3	* 9848.000	42.38	3.39	45.77	-28.23	74.00	200	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

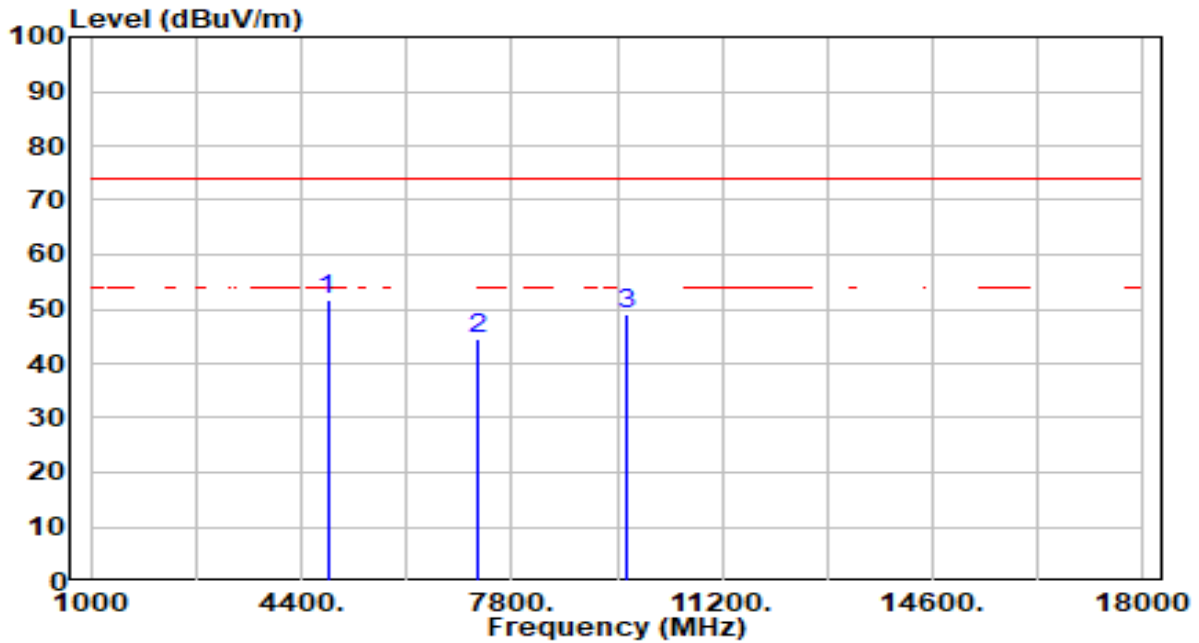


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	53.04	-1.23	51.81	-22.19	74.00	100	150	Peak
2		7236.000	40.30	4.16	44.45	-29.55	74.00	100	174	Peak
3		9648.000	45.80	3.29	49.09	-24.91	74.00	106	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

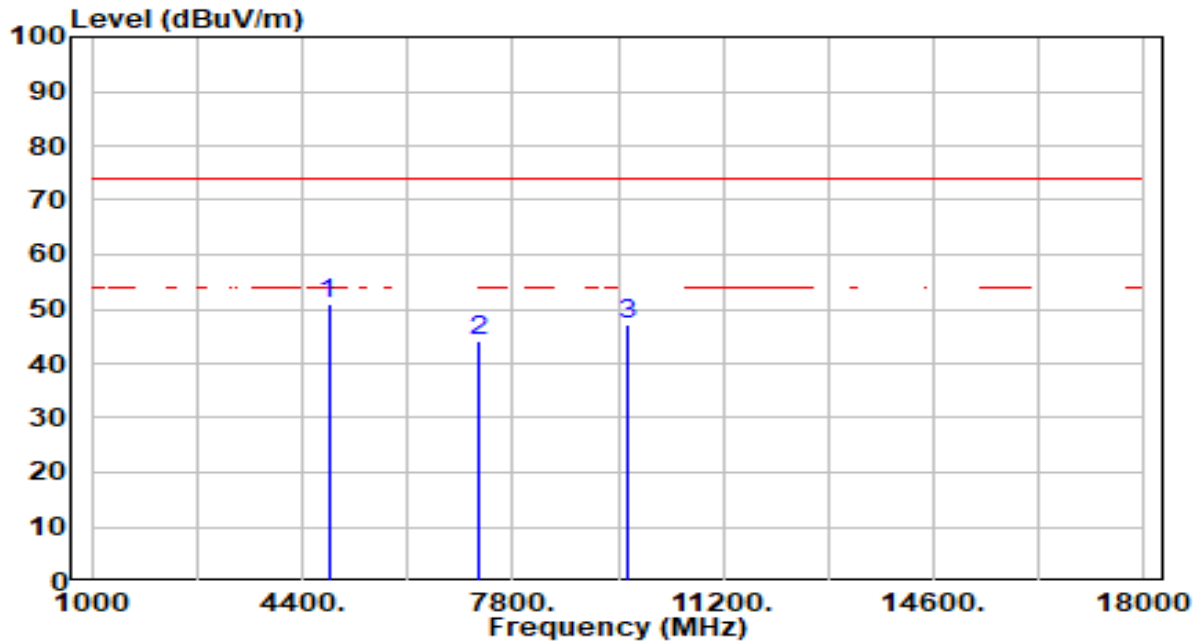


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	52.08	-1.23	50.85	-23.15	74.00	100	155	Peak
2		7236.000	39.82	4.16	43.98	-30.02	74.00	200	104	Peak
3		9648.000	44.04	3.29	47.33	-26.67	74.00	100	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

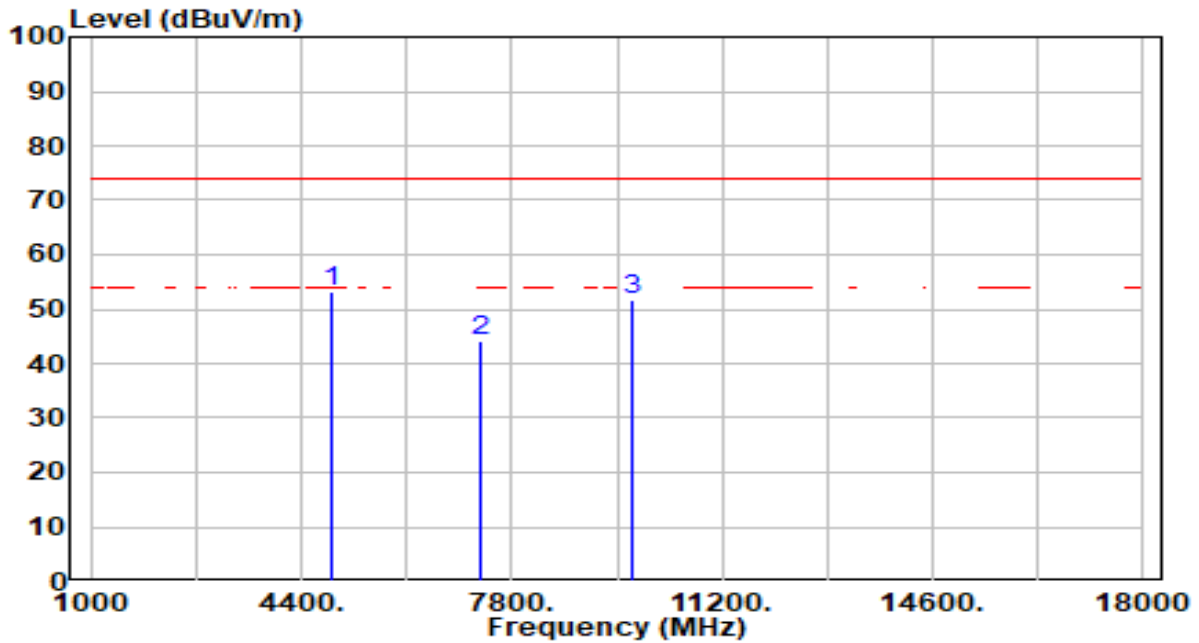


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	54.46	-1.13	53.33	-20.67	74.00	100	6	Peak
2		7311.000	40.17	4.14	44.30	-29.70	74.00	100	116	Peak
3		9748.000	48.56	3.33	51.89	-22.11	74.00	200	327	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

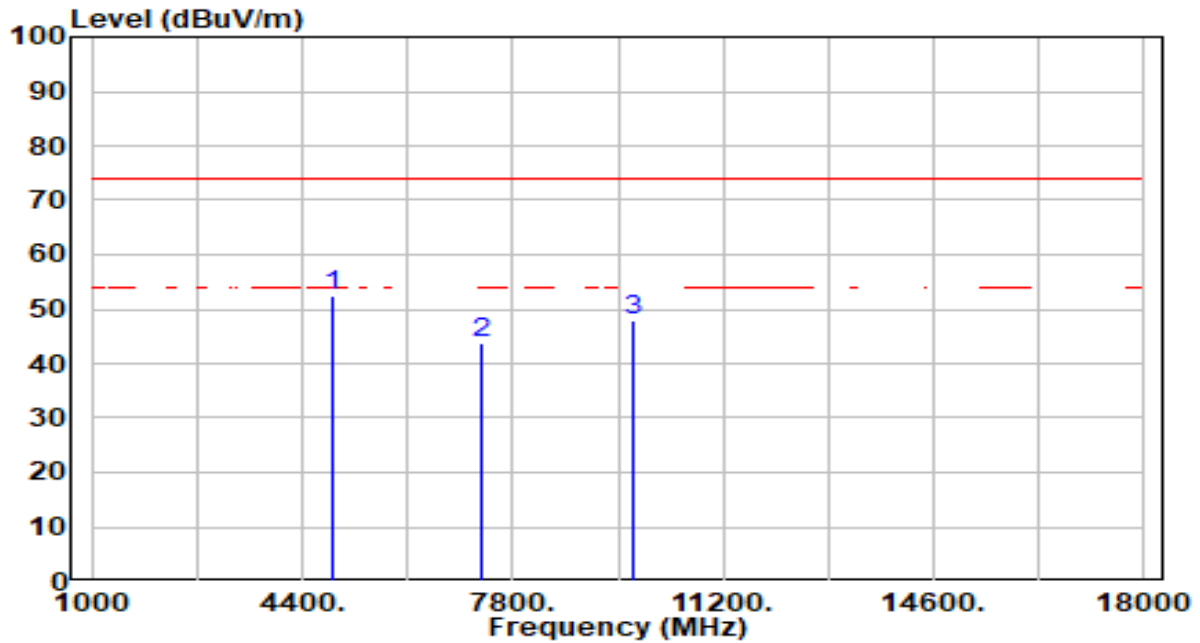


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	53.75	-1.13	52.62	-21.38	74.00	200	129	Peak
2		7311.000	39.81	4.14	43.94	-30.06	74.00	100	356	Peak
3		9748.000	44.54	3.33	47.87	-26.13	74.00	200	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

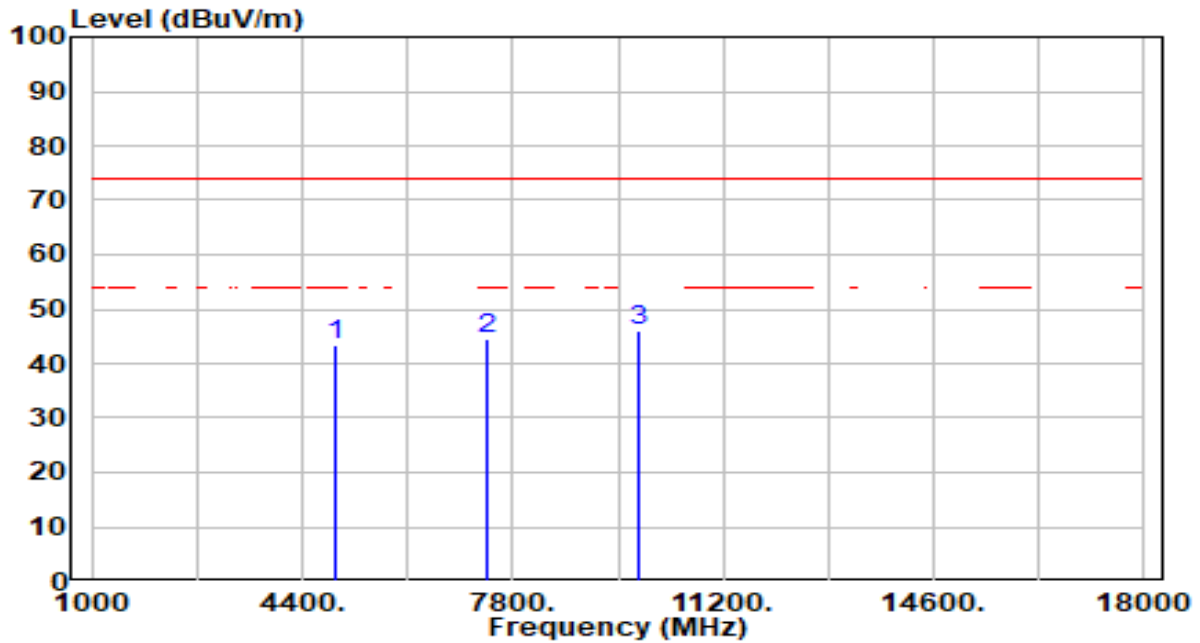


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	44.31	-1.03	43.29	-30.71	74.00	130	0	Peak
2	7386.000	40.23	4.11	44.34	-29.66	74.00	100	145	Peak
3	* 9848.000	42.71	3.39	46.10	-27.90	74.00	100	62	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

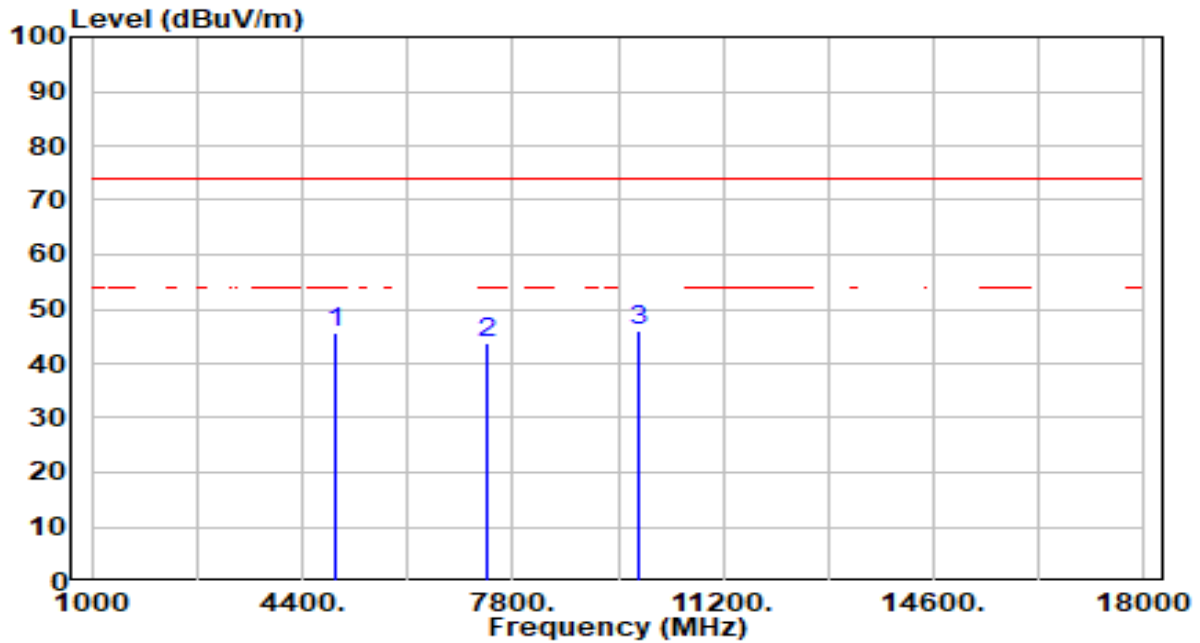


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	46.74	-1.03	45.72	-28.28	74.00	100	149	Peak
2	7386.000	39.76	4.11	43.87	-30.13	74.00	100	179	Peak
3	* 9848.000	42.74	3.39	46.13	-27.87	74.00	100	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

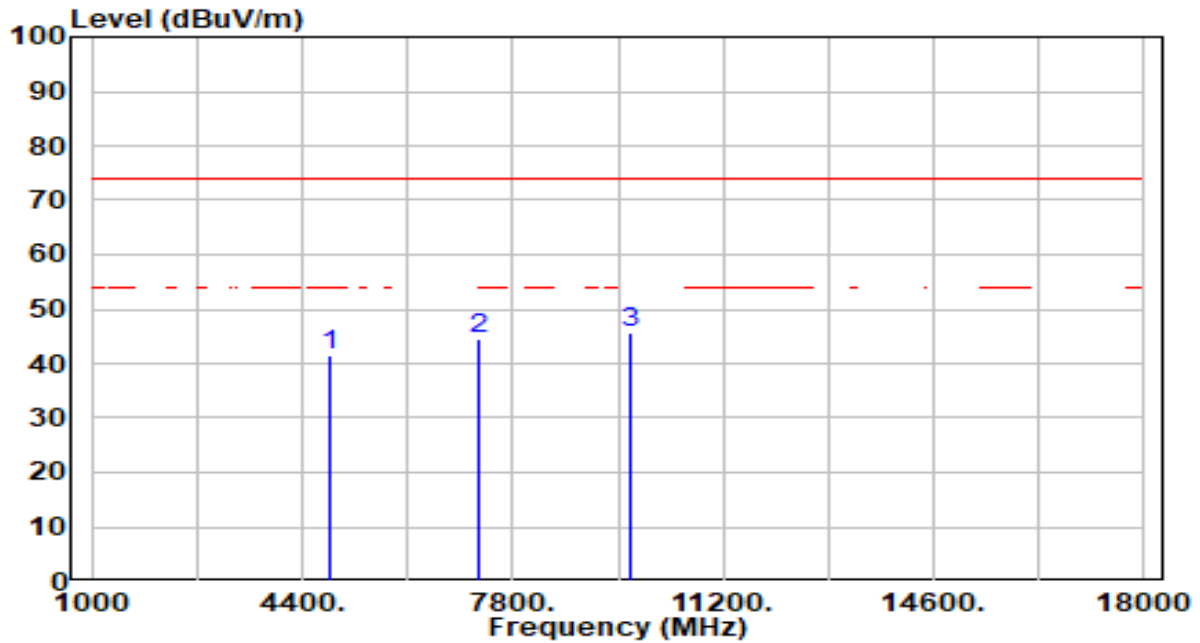


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	42.59	-1.19	41.40	-32.60	74.00	100	257	Peak
2	7266.000	40.31	4.15	44.46	-29.54	74.00	200	40	Peak
3	* 9688.000	42.32	3.30	45.62	-28.38	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

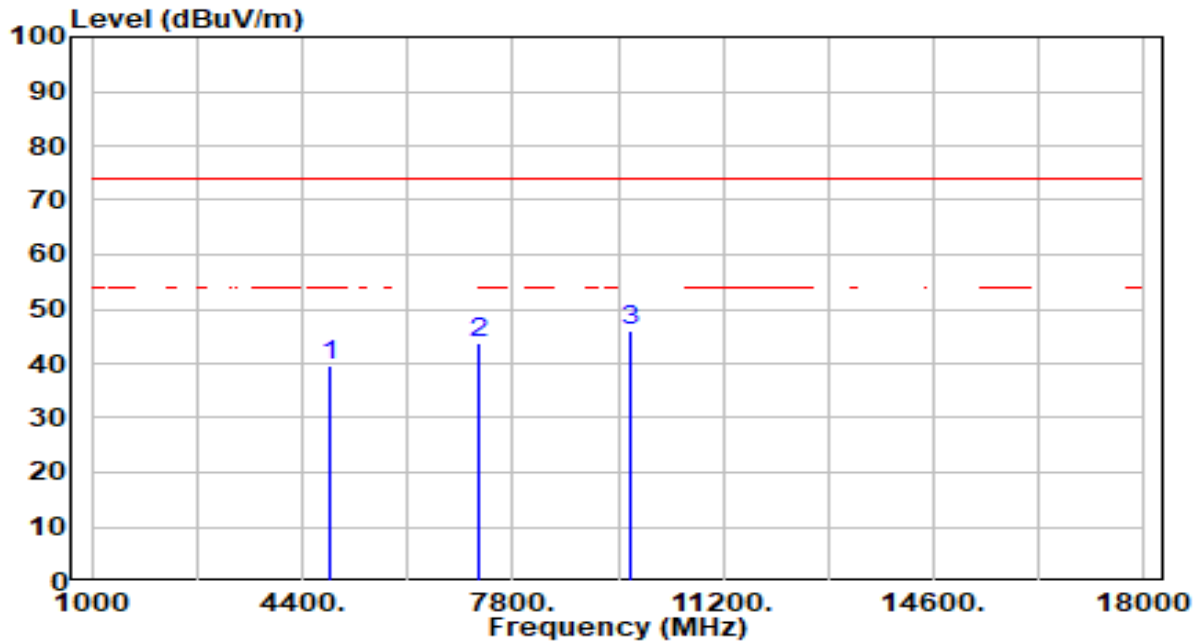


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.94	-1.19	39.76	-34.24	74.00	200	249	Peak
2	7266.000	39.62	4.15	43.77	-30.23	74.00	200	0	Peak
3	* 9688.000	42.67	3.30	45.98	-28.02	74.00	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

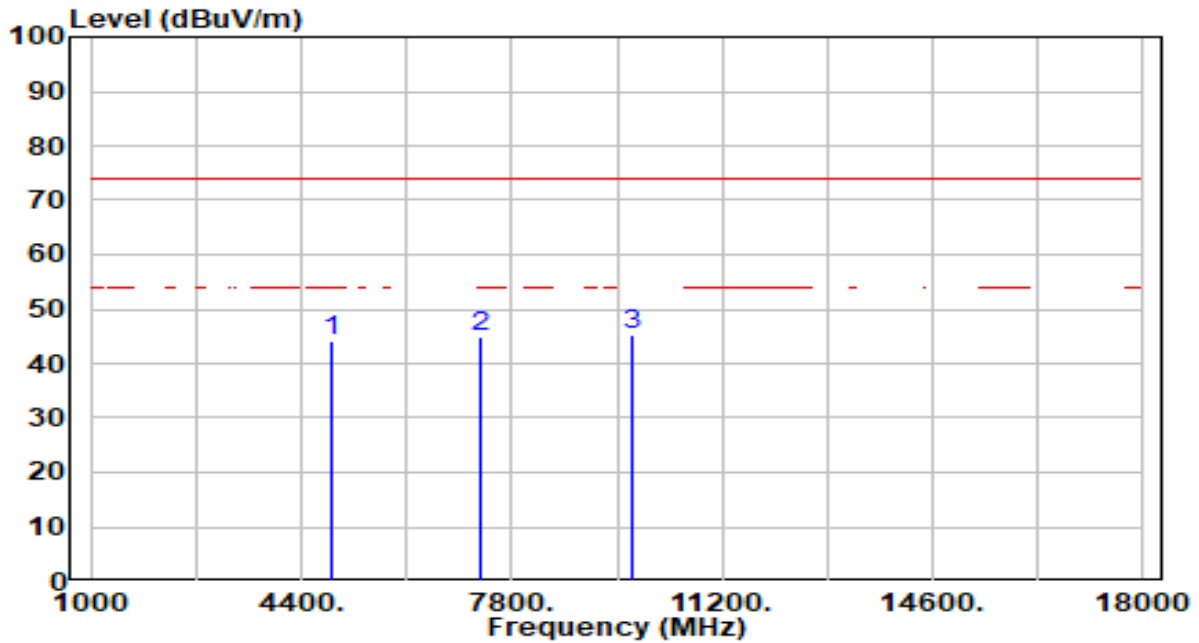


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	45.18	-1.13	44.05	-29.95	74.00	150	0	Peak
2	7311.000	40.64	4.14	44.78	-29.22	74.00	100	244	Peak
3	* 9748.000	42.08	3.33	45.40	-28.60	74.00	200	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

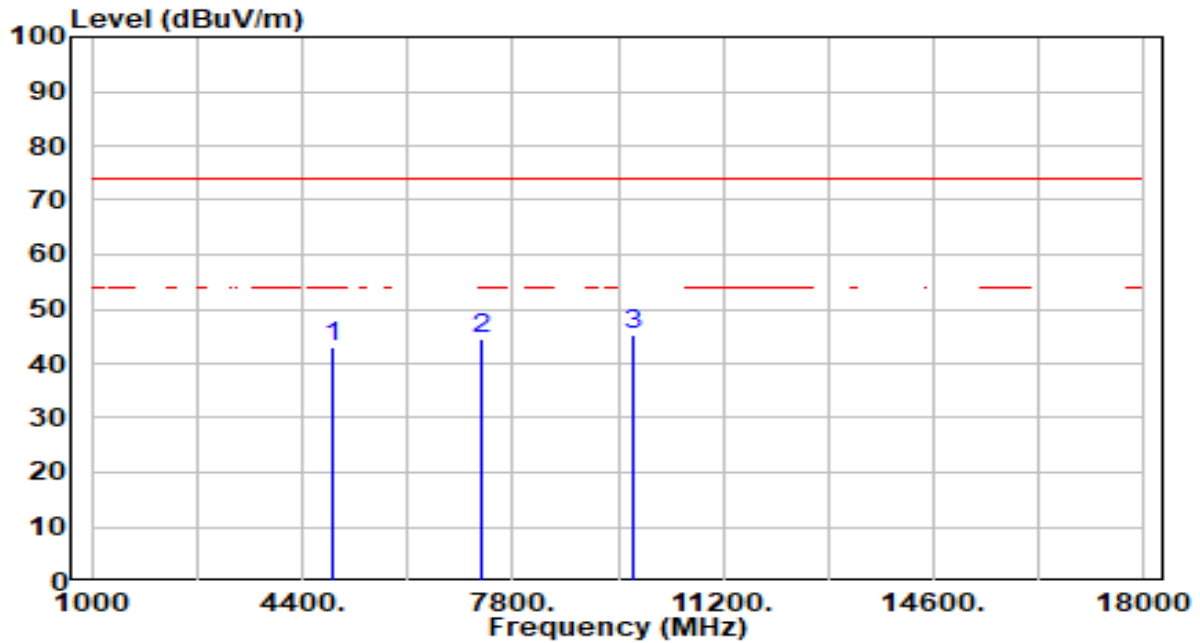


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.03	-1.13	42.90	-31.10	74.00	200	346	Peak
2	7311.000	40.24	4.14	44.38	-29.62	74.00	200	118	Peak
3	* 9748.000	42.09	3.33	45.41	-28.59	74.00	200	106	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

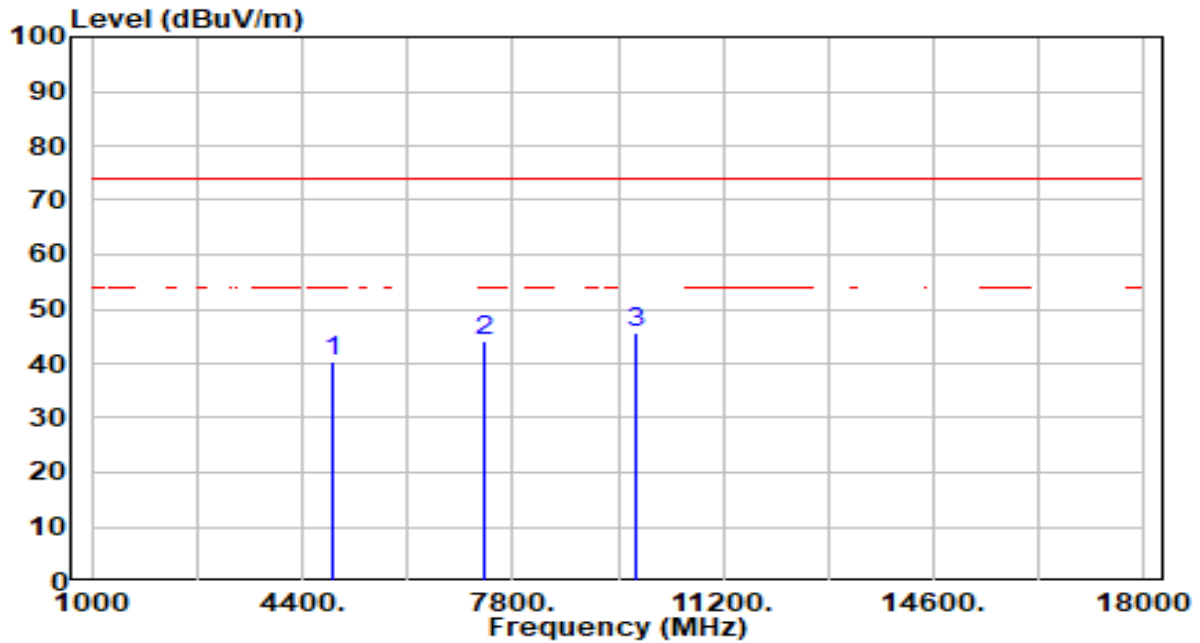


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.39	-1.07	40.33	-33.67	74.00	100	310	Peak
2	7356.000	39.99	4.12	44.11	-29.89	74.00	100	184	Peak
3	* 9808.000	42.31	3.35	45.67	-28.33	74.00	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

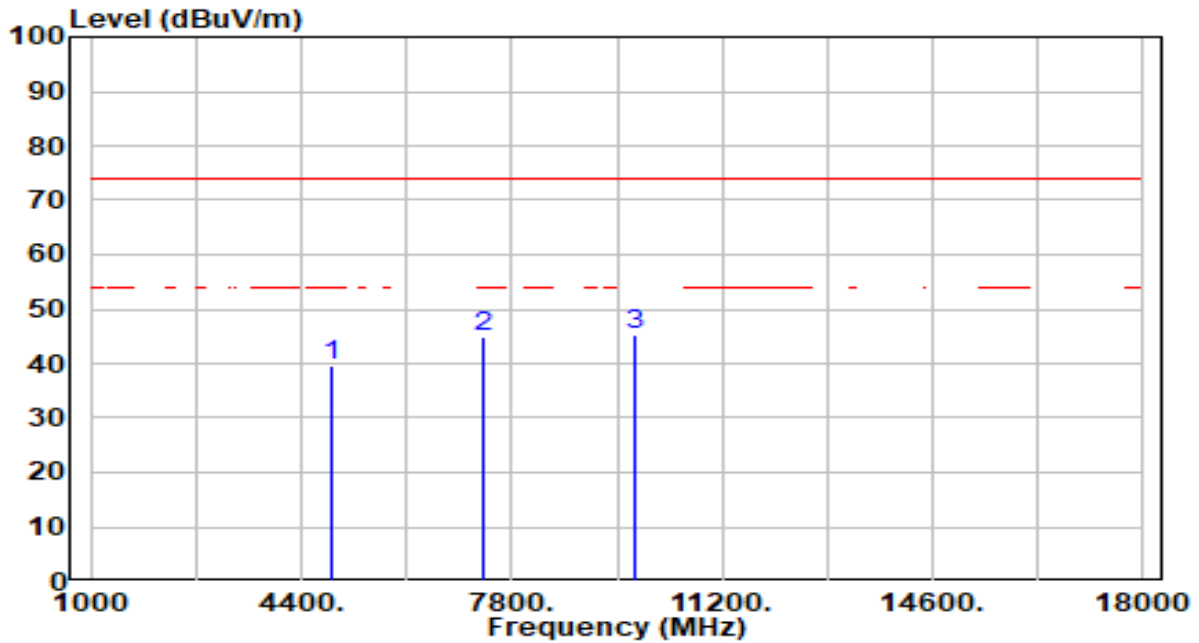


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.77	-1.07	39.71	-34.29	74.00	200	144	Peak
2	7356.000	40.88	4.12	45.00	-29.00	74.00	200	308	Peak
3	* 9808.000	41.97	3.35	45.32	-28.68	74.00	200	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

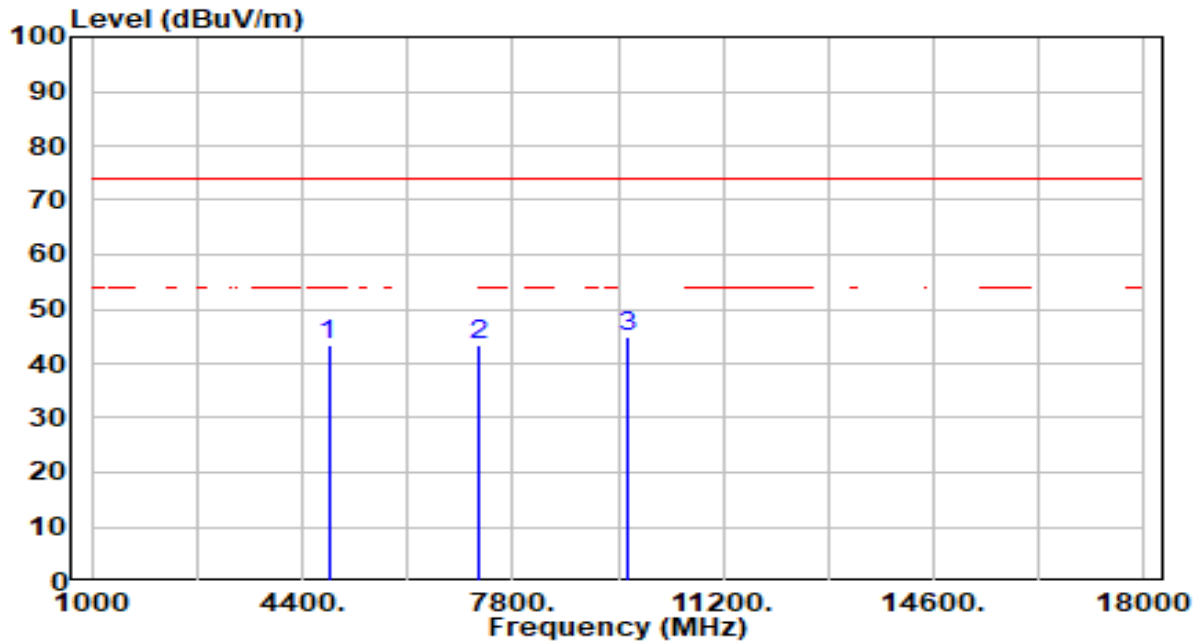


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	44.81	-1.23	43.58	-30.42	74.00	100	14	Peak
2	7236.000	39.34	4.16	43.50	-30.50	74.00	100	250	Peak
3	* 9648.000	41.63	3.29	44.92	-29.08	74.00	100	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

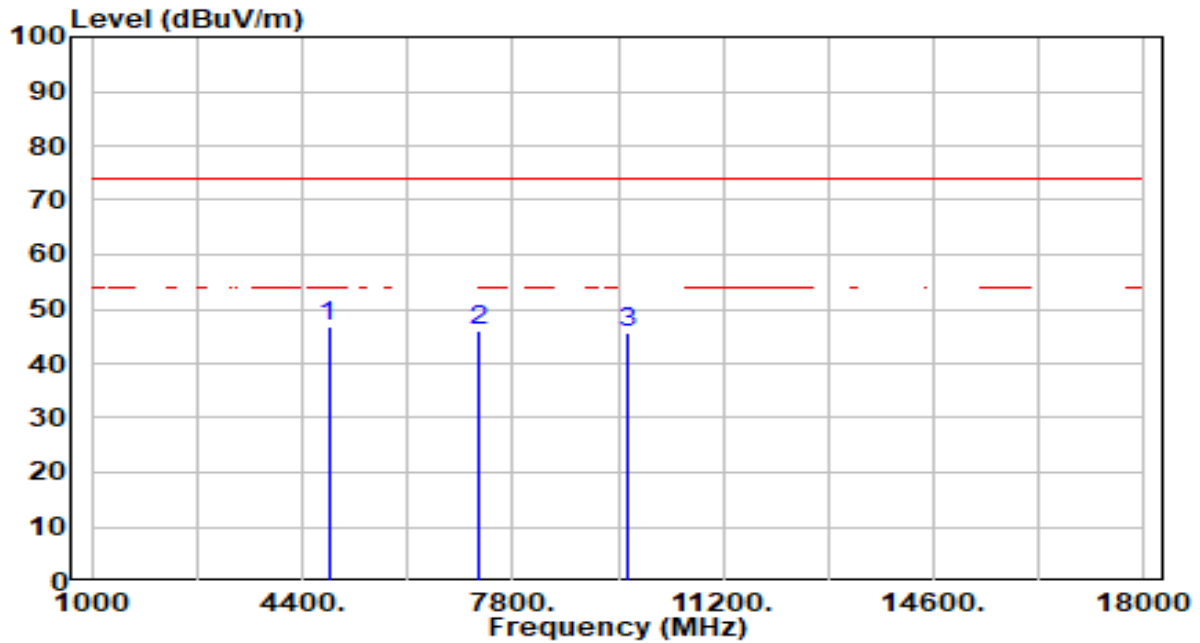


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	47.95	-1.23	46.72	-27.28	74.00	200	157	Peak
2		41.91	4.16	46.07	-27.93	74.00	200	320	Peak
3		42.50	3.29	45.79	-28.21	74.00	200	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

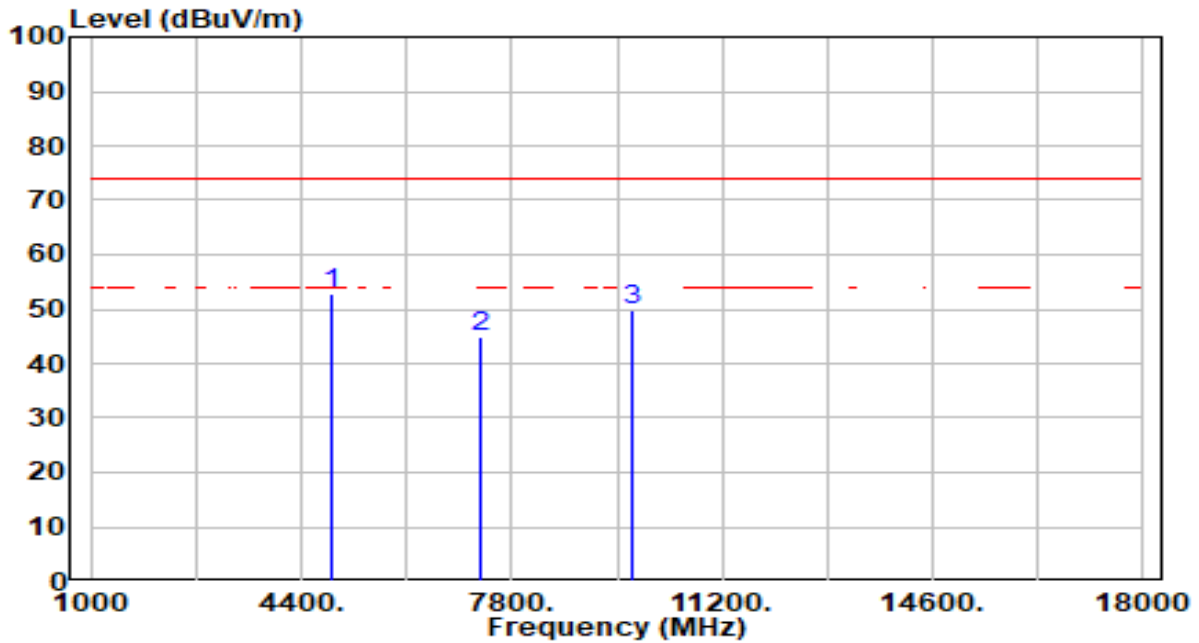


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	54.04	-1.13	52.91	-21.09	74.00	137	360	Peak
2		7311.000	40.87	4.14	45.01	-28.99	74.00	100	202	Peak
3		9748.000	46.48	3.33	49.80	-24.20	74.00	200	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

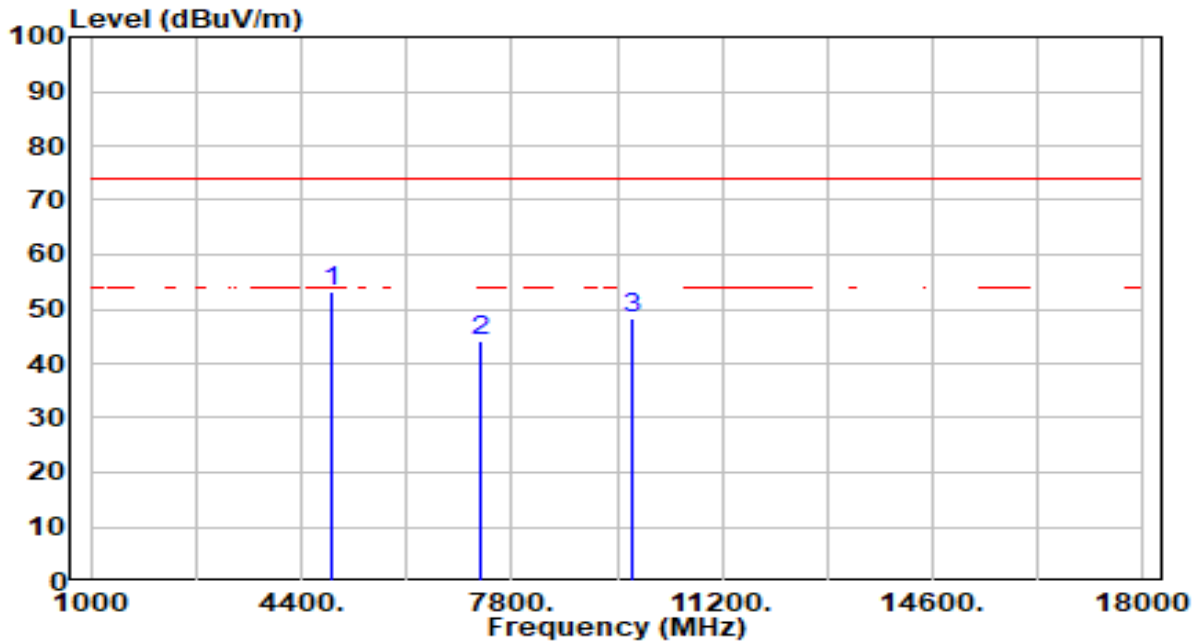


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	54.19	-1.13	53.06	-20.94	74.00	100	166	Peak
2		7311.000	40.15	4.14	44.29	-29.71	74.00	100	92	Peak
3		9748.000	44.97	3.33	48.30	-25.70	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

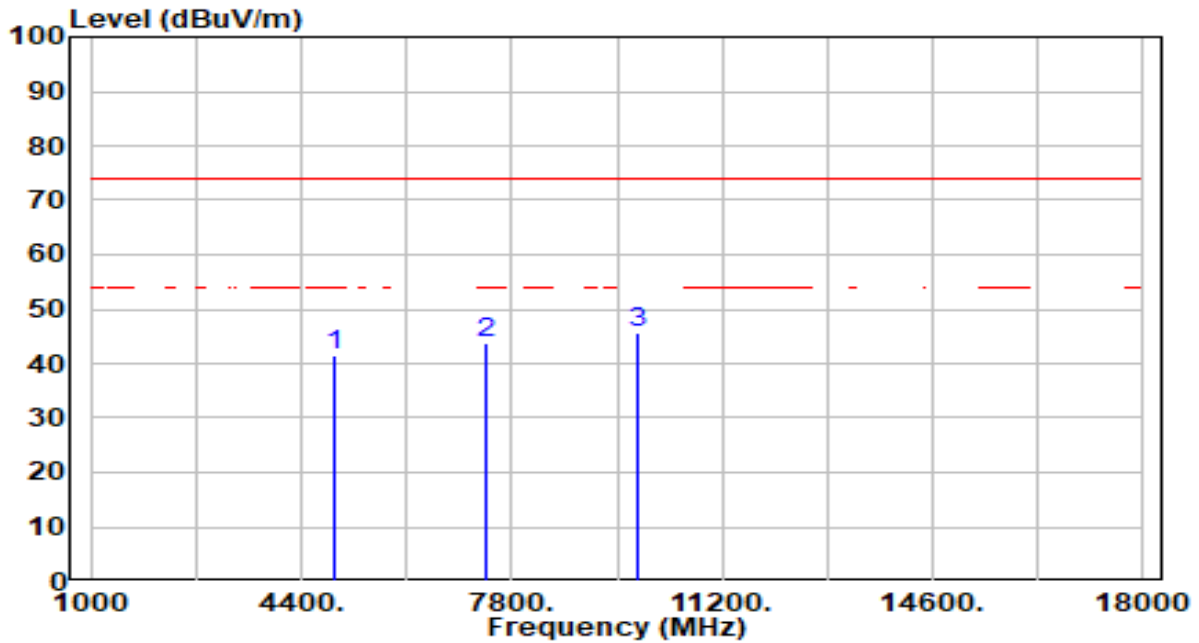


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.50	-1.03	41.47	-32.53	74.00	100	357	Peak
2	7386.000	39.84	4.11	43.95	-30.05	74.00	100	147	Peak
3	* 9848.000	42.43	3.39	45.82	-28.18	74.00	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

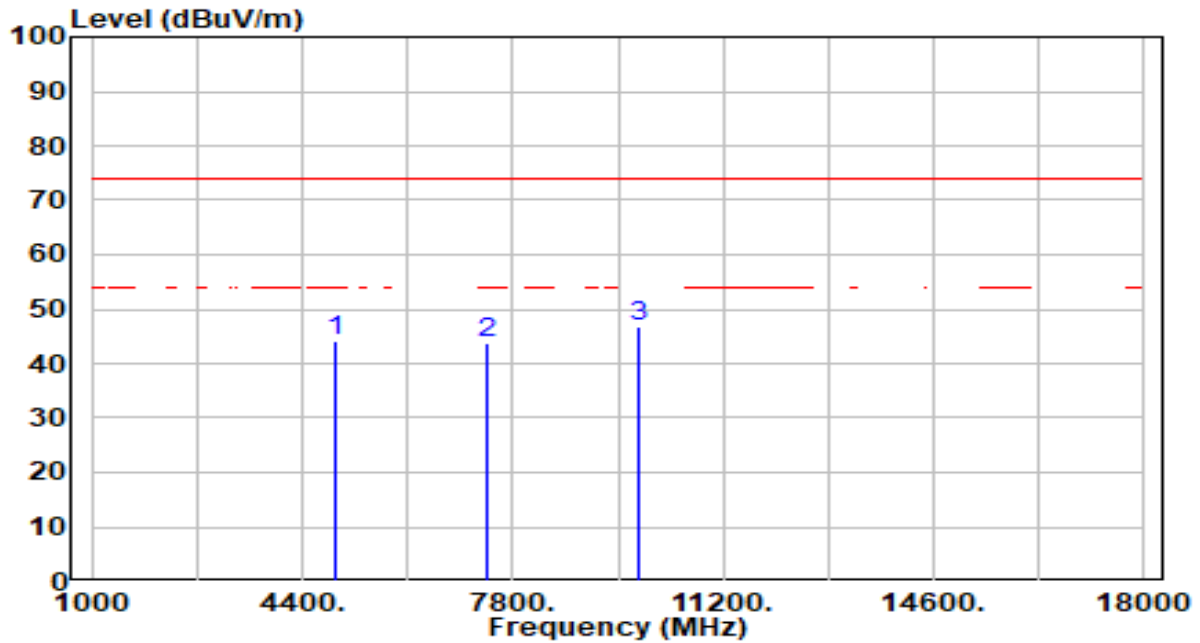


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.12	-1.03	44.09	-29.91	74.00	200	143	Peak
2	7386.000	39.77	4.11	43.88	-30.12	74.00	200	77	Peak
3	* 9848.000	43.22	3.39	46.61	-27.39	74.00	200	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

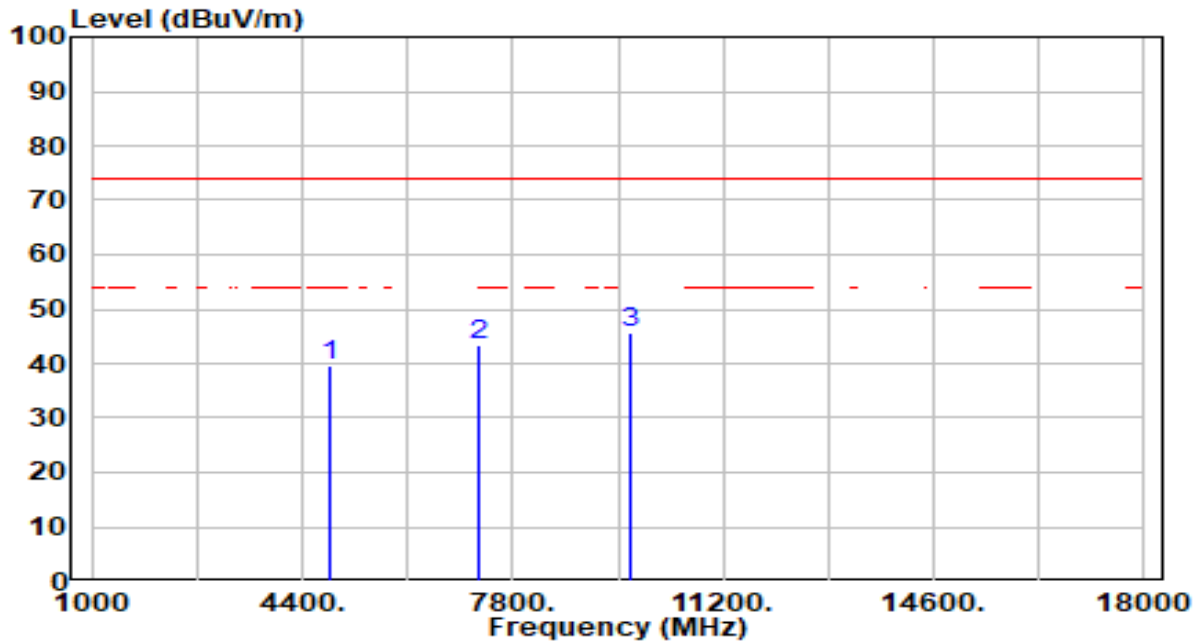


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.81	-1.19	39.63	-34.37	74.00	100	4	Peak
2	7266.000	39.08	4.15	43.23	-30.77	74.00	100	237	Peak
3	* 9688.000	42.37	3.30	45.68	-28.32	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

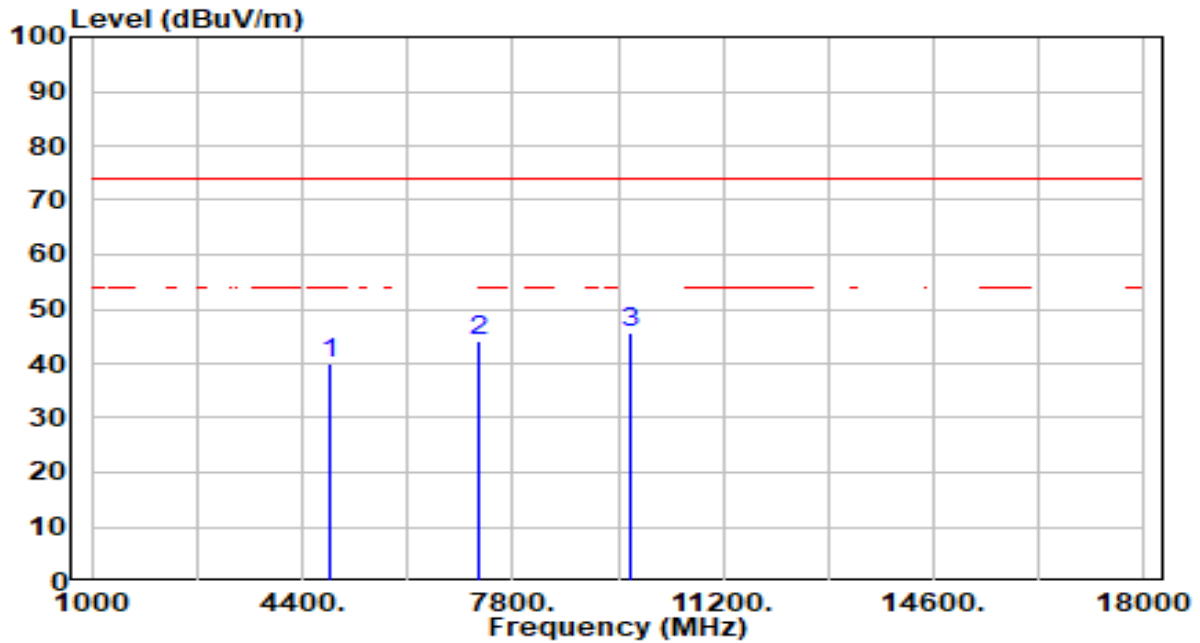


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	41.07	-1.19	39.88	-34.12	74.00	200	360	Peak
2	7266.000	40.12	4.15	44.28	-29.72	74.00	200	326	Peak
3	* 9688.000	42.18	3.30	45.49	-28.51	74.00	200	284	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

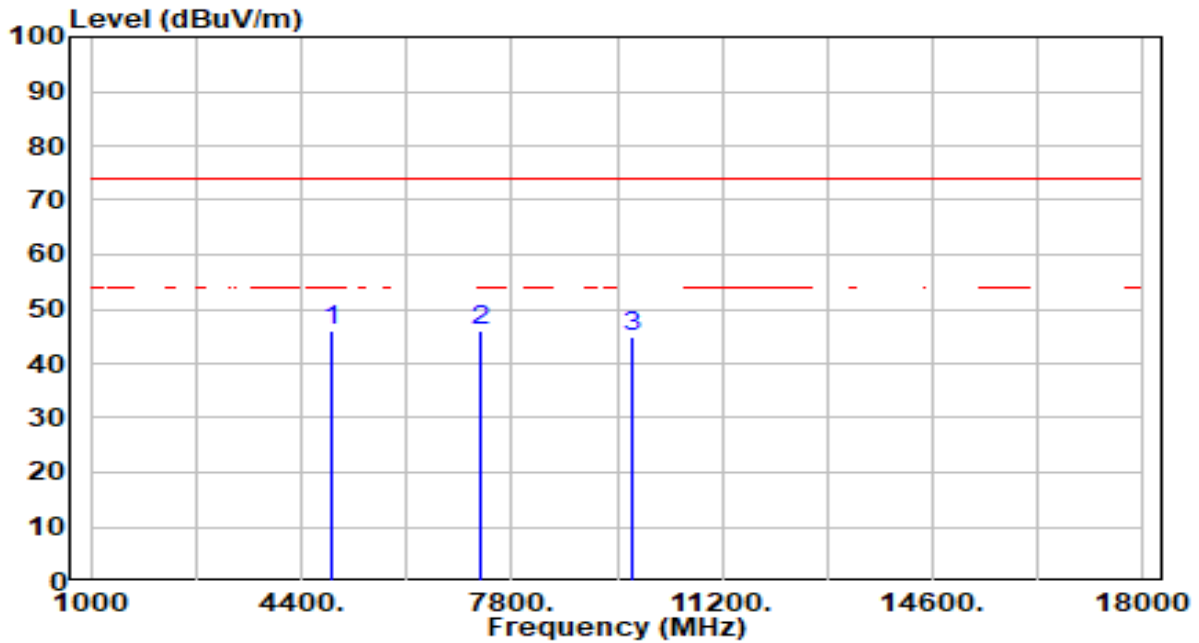


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	47.15	-1.13	46.02	-27.98	74.00	100	0	Peak
2	* 7311.000	41.91	4.14	46.05	-27.95	74.00	100	256	Peak
3	9748.000	41.66	3.33	44.99	-29.01	74.00	100	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

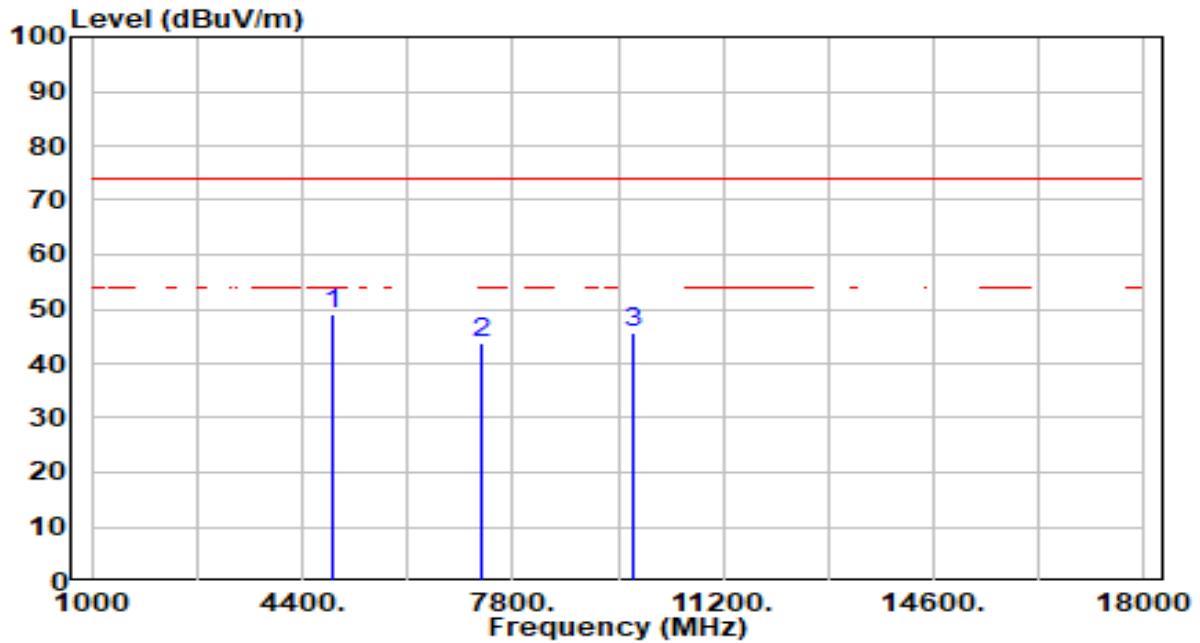


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	50.22	-1.13	49.09	-24.91	74.00	200	138	Peak
2		7311.000	39.47	4.14	43.61	-30.39	74.00	200	84	Peak
3		9748.000	42.15	3.33	45.48	-28.52	74.00	200	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

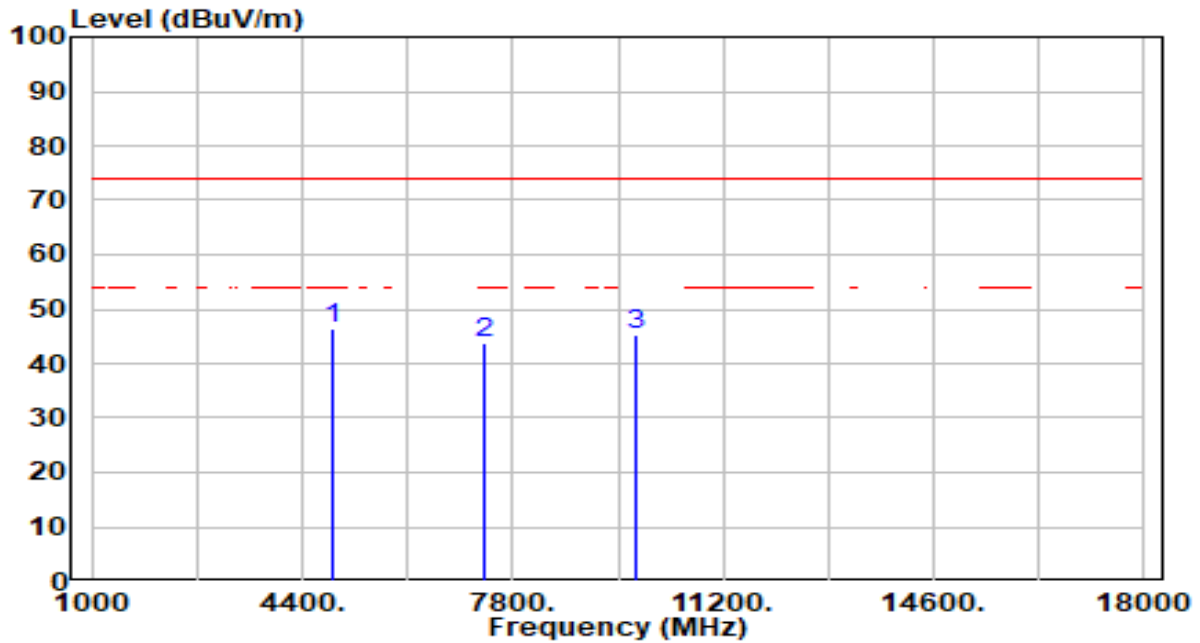


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4904.000	47.65	-1.07	46.59	-27.41	74.00	100	9	Peak
2		7356.000	39.54	4.12	43.67	-30.33	74.00	100	121	Peak
3		9808.000	42.03	3.35	45.39	-28.61	74.00	100	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22.3°C /62.1%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

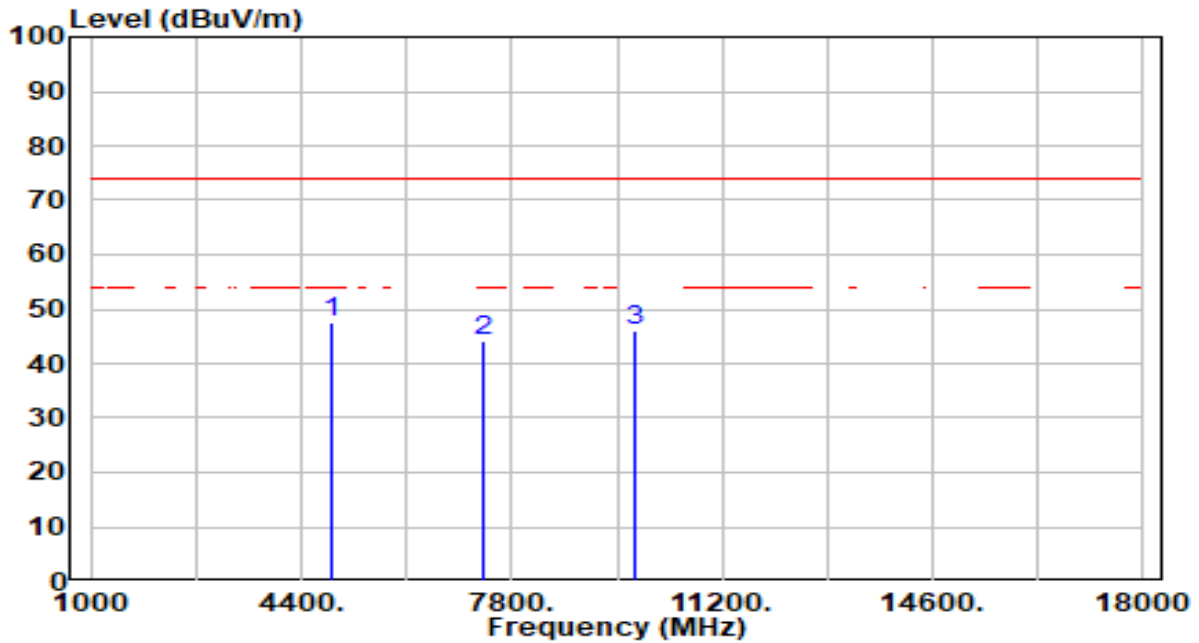

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4904.000	48.79	-1.07	47.72	-26.28	74.00	200	160	Peak
2		7356.000	40.16	4.12	44.28	-29.72	74.00	200	287	Peak
3		9808.000	42.51	3.35	45.86	-28.14	74.00	200	233	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = RMS
5. Sweep time = auto couple
6. Trace mode = Average hold (100 times)
7. Trace was allowed to stabilize

1. Average Measurements above 1GHz (Method VB: duty cycle is < 98%)


2. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
3. RBW = 1MHz
4. EUT duty cycle is < 98%, set $VBW \geq 1/T$. T is the minimum transmission duration.
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to stabilize

7.7.4. Test Setup

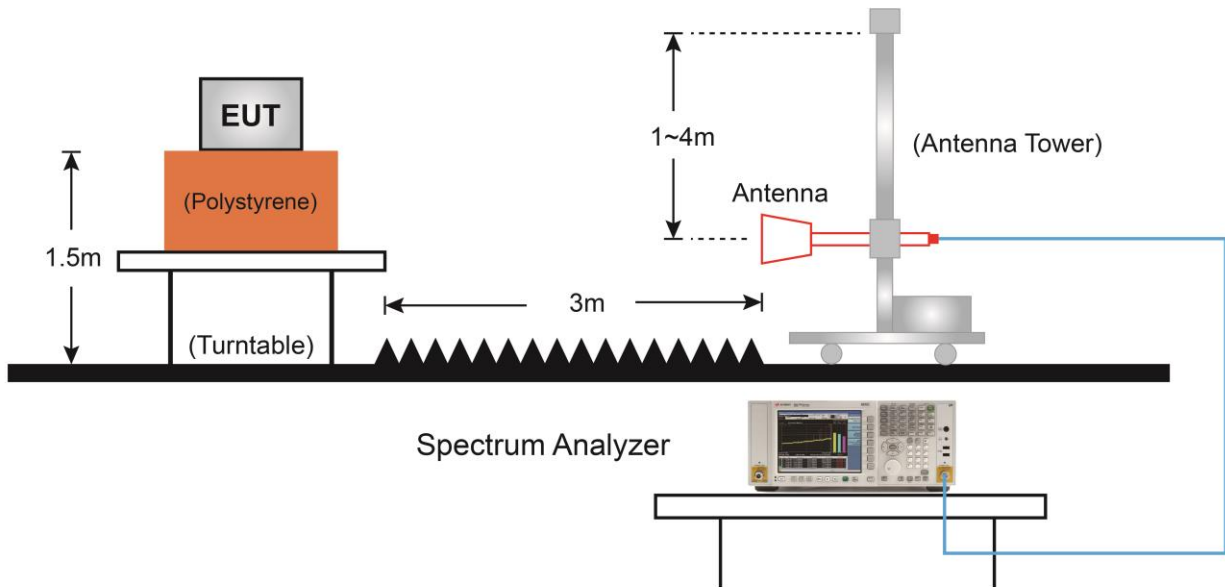

7.7.5. Test Result

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

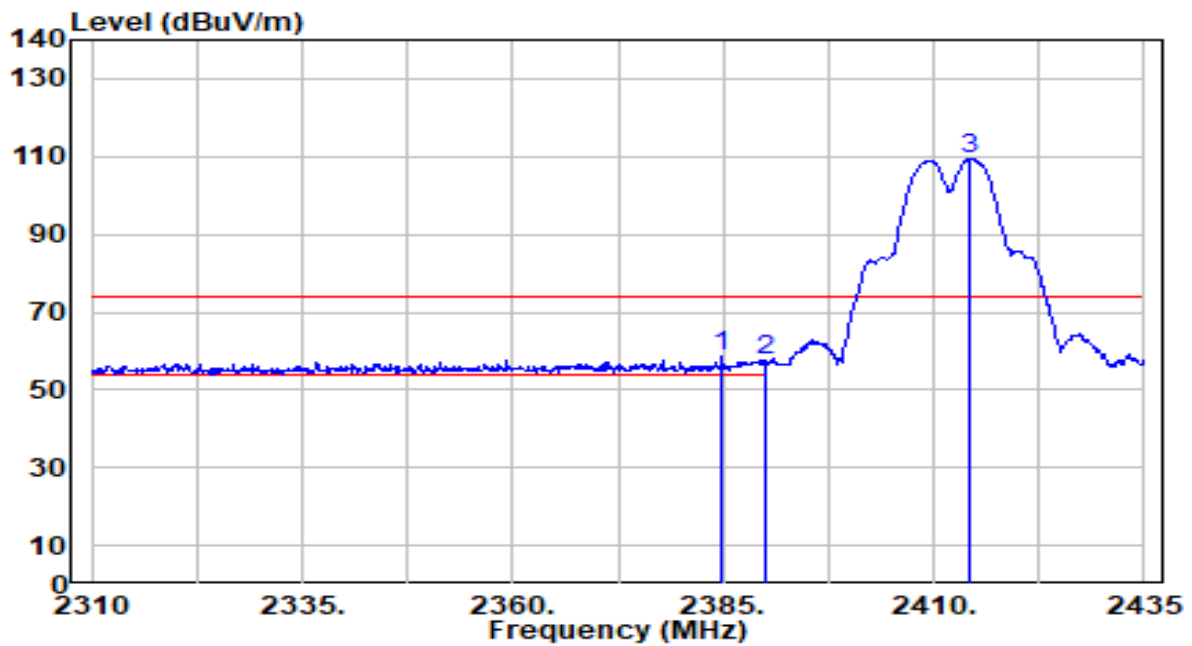


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2384.875	28.23	30.17	58.39	-15.61	74.00	100	300	Peak
2		2390.000	27.16	30.18	57.34	-16.66	74.00	100	300	Peak
3		2414.375	79.13	30.23	109.35	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

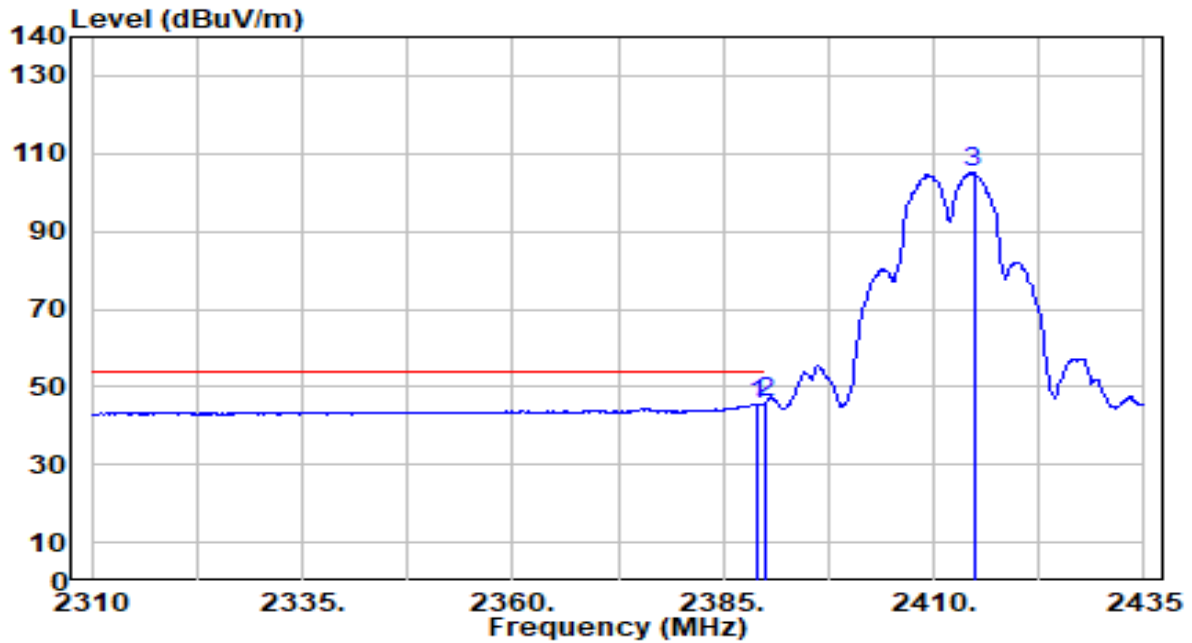


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	15.24	30.18	45.42	-8.58	54.00	100	300	Average
2	* 2390.000	15.81	30.18	45.99	-8.01	54.00	100	300	Average
3	2414.750	74.81	30.23	105.04	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

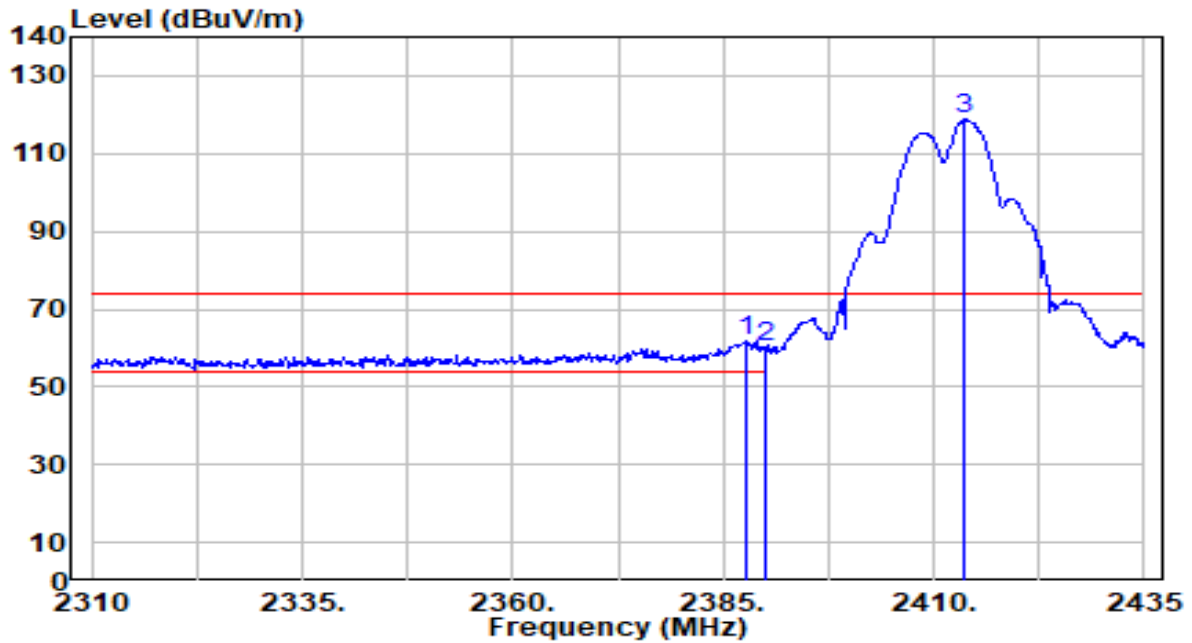


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.875	31.76	30.17	61.93	-12.07	74.00	100	5	Peak
2		2390.000	30.05	30.18	60.23	-13.77	74.00	100	5	Peak
3		2413.750	88.46	30.23	118.69	N/A	N/A	100	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

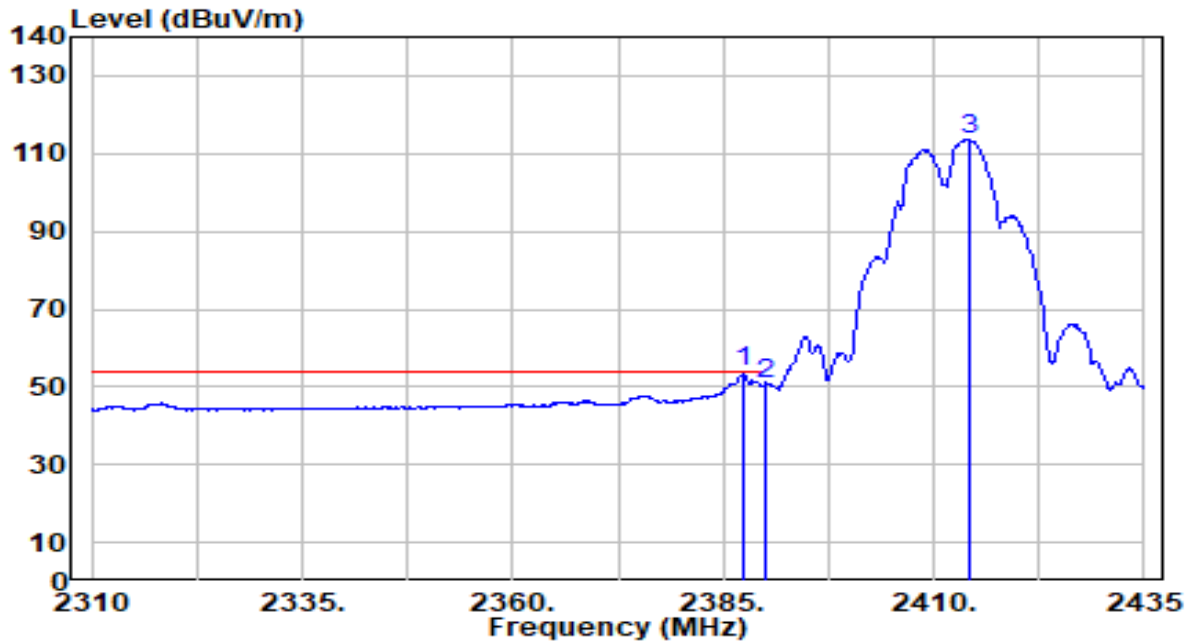


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.62	30.17	53.79	-0.21	54.00	100	5	Average
2		20.73	30.18	50.91	-3.09	54.00	100	5	Average
3		83.55	30.23	113.78	N/A	N/A	100	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

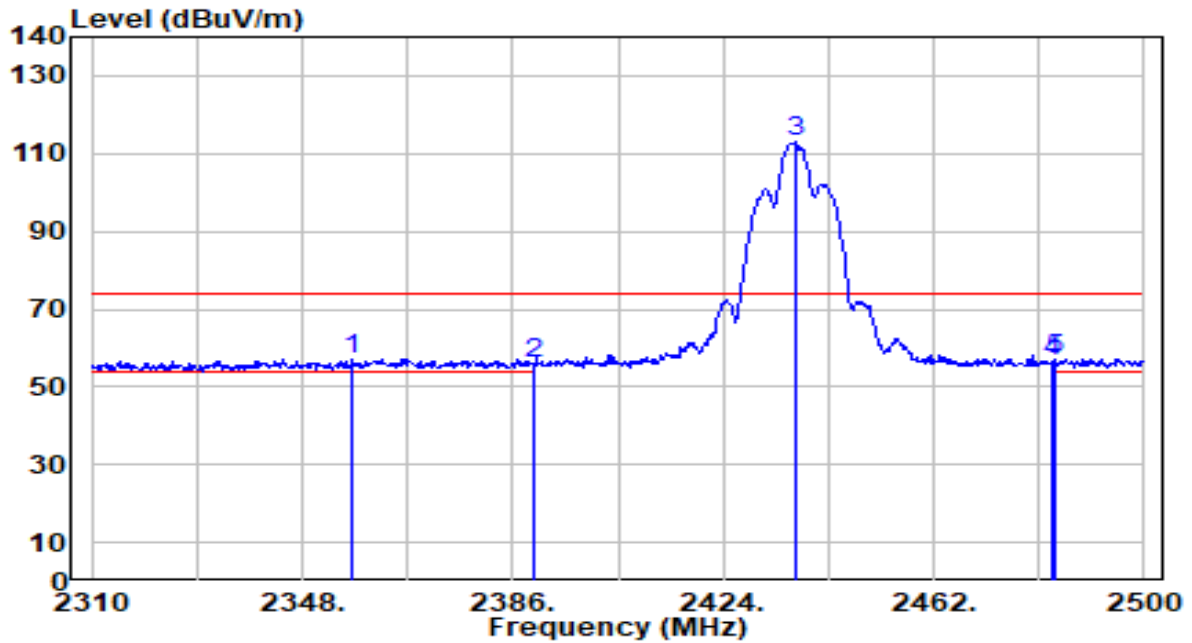


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2356.930	27.01	30.09	57.10	-16.90	74.00	100	300	Peak
2	2390.000	25.60	30.18	55.78	-18.22	74.00	100	300	Peak
3	2436.920	82.63	30.26	112.89	N/A	N/A	100	300	Peak
4	2483.500	26.11	30.32	56.43	-17.57	74.00	100	300	Peak
5	* 2484.040	26.86	30.32	57.18	-16.82	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

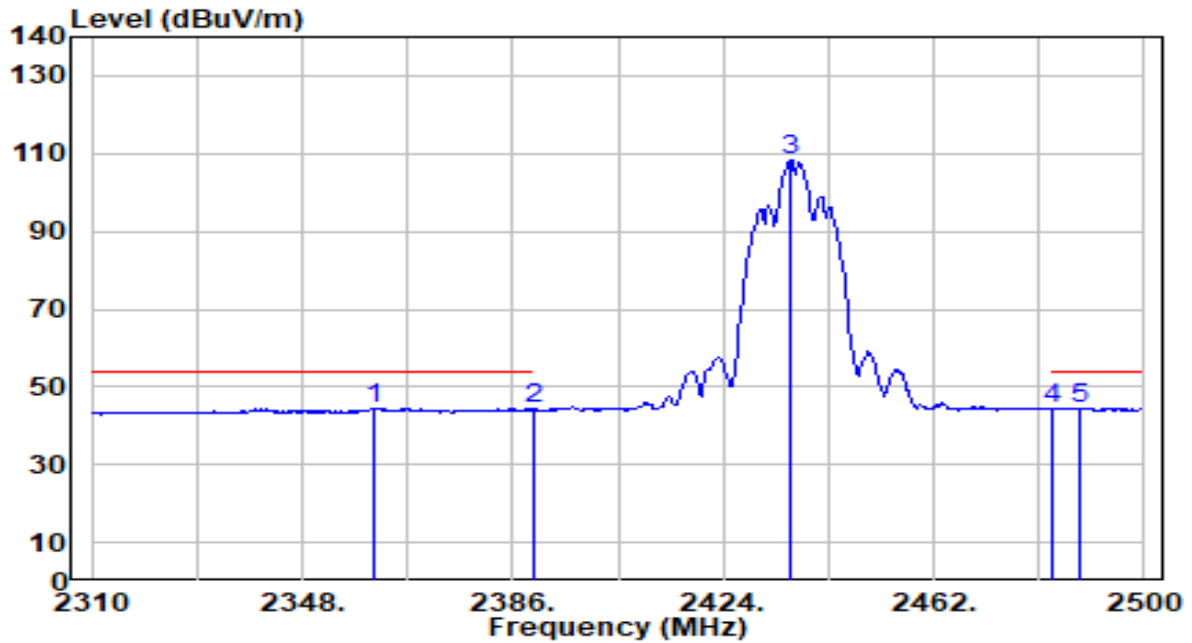


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2360.920	14.35	30.10	44.45	-9.55	54.00	100	300	Average
2	2390.000	14.07	30.18	44.25	-9.75	54.00	100	300	Average
3	2436.350	78.20	30.26	108.45	N/A	N/A	100	300	Average
4	2483.500	14.09	30.32	44.41	-9.59	54.00	100	300	Average
5	* 2488.600	14.19	30.32	44.51	-9.49	54.00	100	300	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

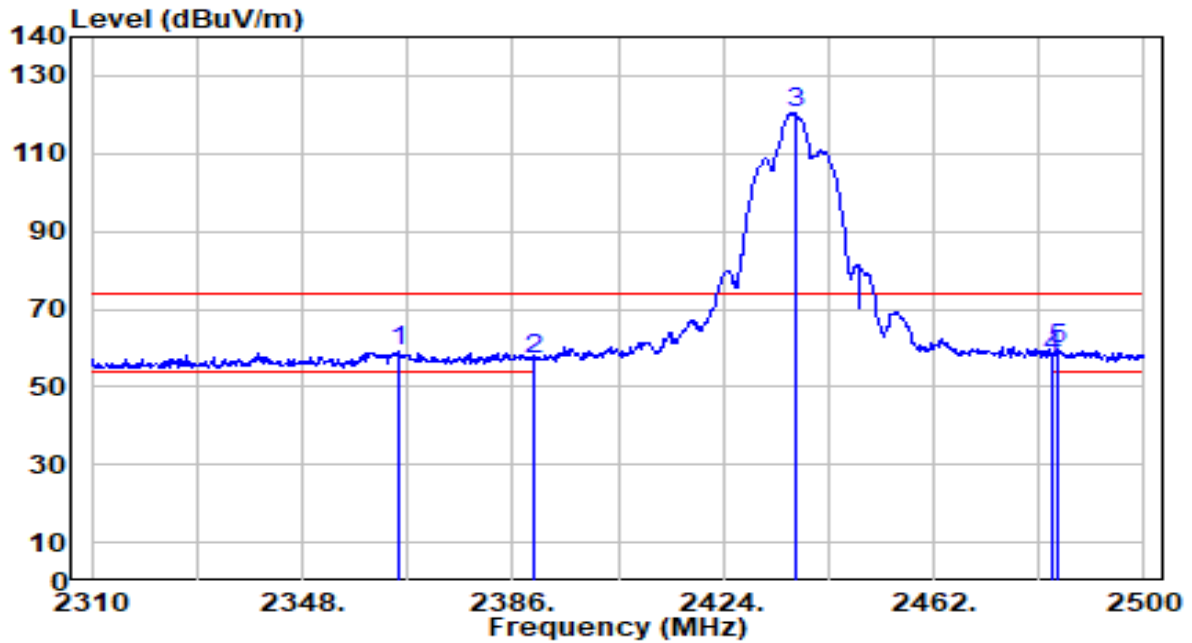


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2365.290	29.30	30.11	59.41	-14.59	74.00	100	0	Peak
2	2390.000	26.94	30.18	57.12	-16.88	74.00	100	0	Peak
3	2437.110	90.32	30.26	120.58	N/A	N/A	100	0	Peak
4	2483.500	27.25	30.32	57.57	-16.43	74.00	100	0	Peak
5	* 2484.420	29.28	30.32	59.60	-14.40	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

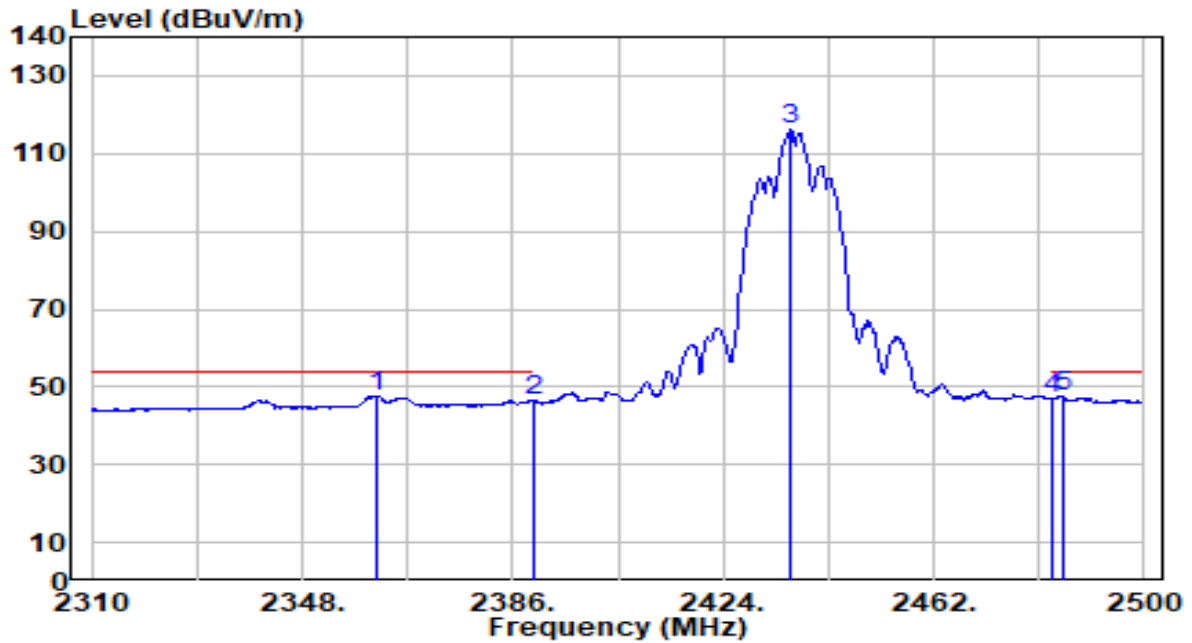


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2361.300	17.52	30.10	47.62	-6.38	54.00	100	0	Average
2	2390.000	16.15	30.18	46.33	-7.67	54.00	100	0	Average
3	2436.160	86.05	30.26	116.30	N/A	N/A	100	0	Average
4	2483.500	16.66	30.32	46.98	-7.02	54.00	100	0	Average
5	2485.370	17.17	30.32	47.49	-6.51	54.00	100	0	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

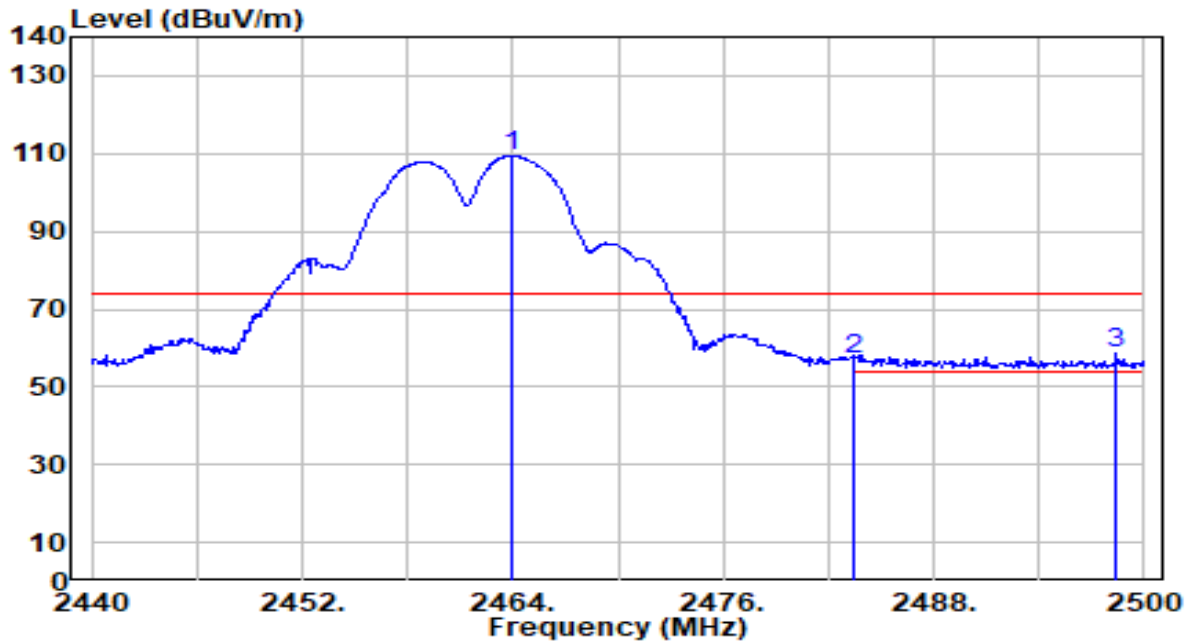


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.880	79.17	30.29	109.47	N/A	N/A	100	301	Peak
2	2483.500	26.95	30.32	57.27	-16.73	74.00	100	301	Peak
3	* 2498.440	28.25	30.34	58.59	-15.41	74.00	100	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

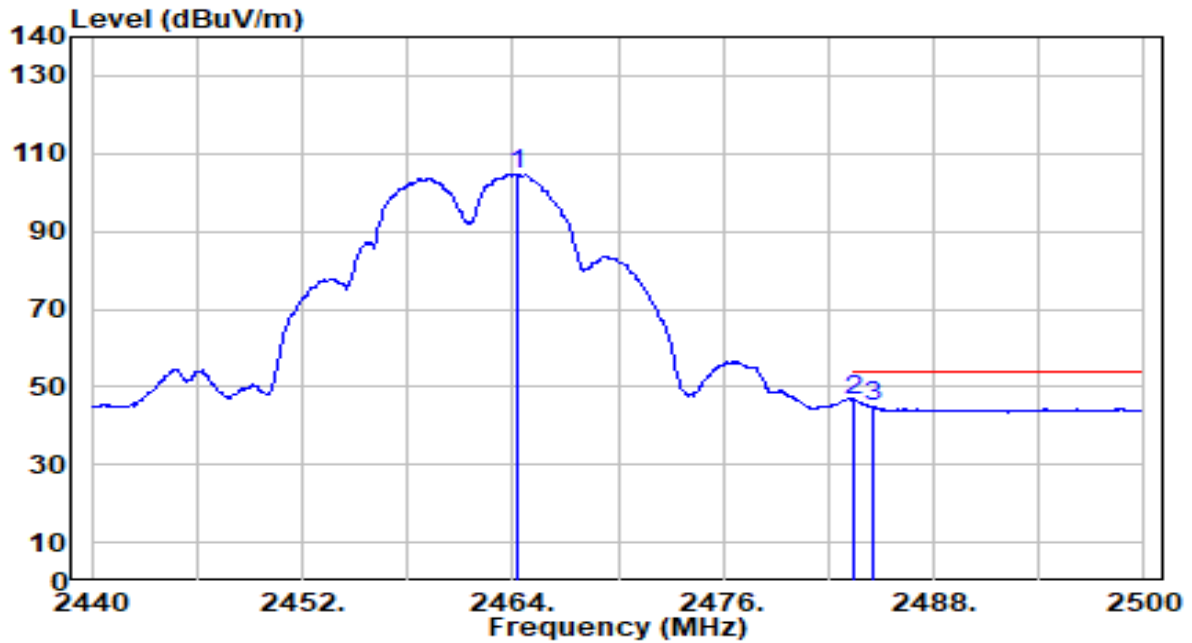


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.300	74.53	30.29	104.83	N/A	N/A	100	301	Average
2	* 2483.500	16.11	30.32	46.43	-7.57	54.00	100	301	Average
3	2484.520	14.56	30.32	44.87	-9.13	54.00	100	301	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

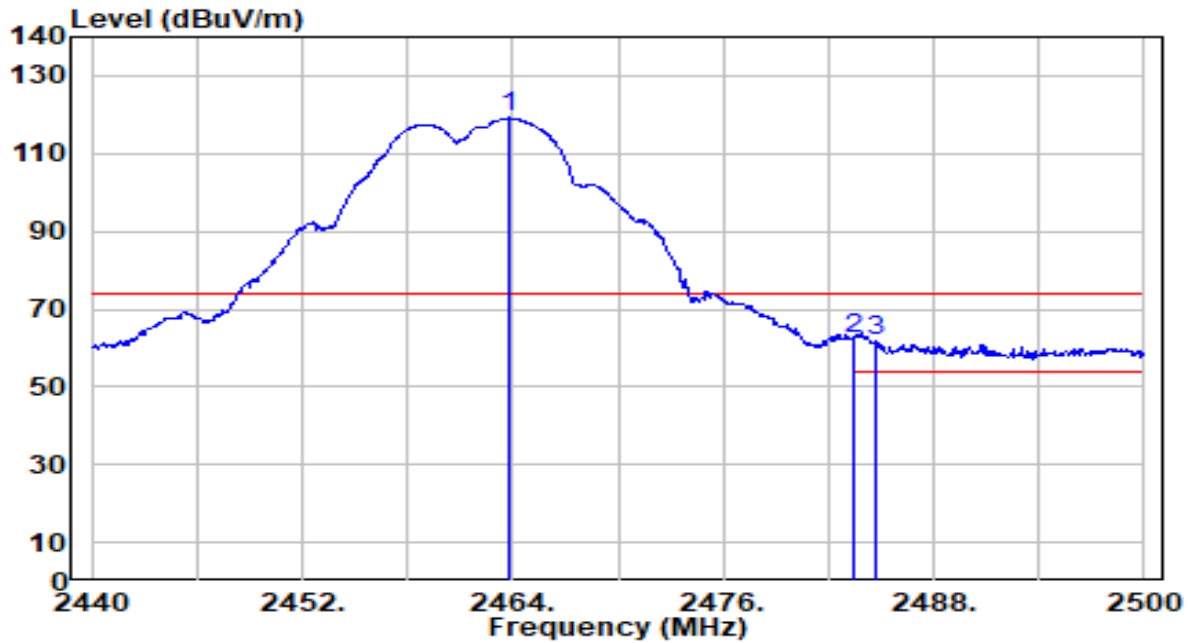


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.820	88.85	30.29	119.14	N/A	N/A	100	4	Peak
2	* 2483.500	32.04	30.32	62.36	-11.64	74.00	100	4	Peak
3	2484.640	31.49	30.32	61.81	-12.19	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

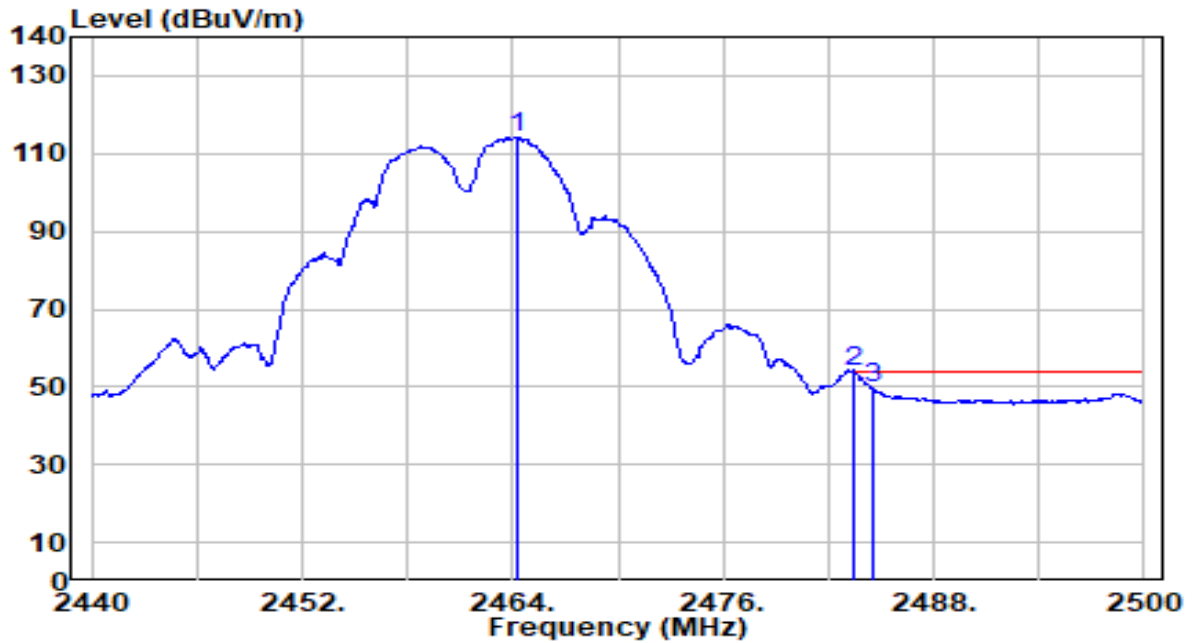


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.240	83.77	30.29	114.07	N/A	N/A	100	4	Average
2	* 2483.500	23.38	30.32	53.70	-0.30	54.00	100	4	Average
3	2484.520	19.20	30.32	49.52	-4.48	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

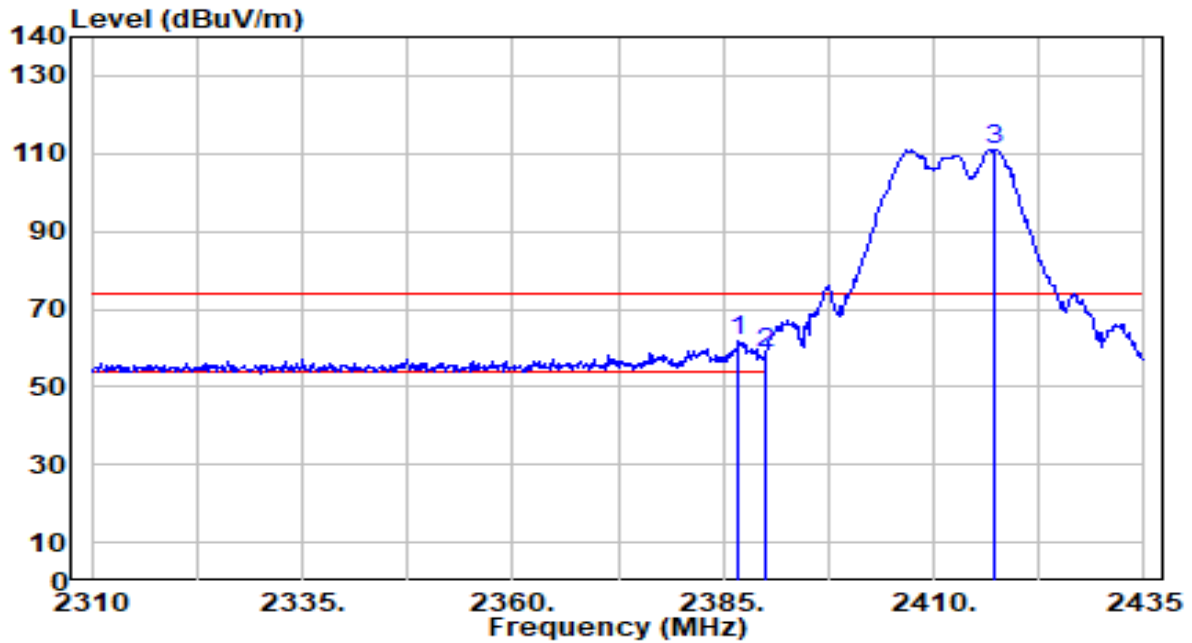


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.750	31.84	30.17	62.01	-11.99	74.00	100	300	Peak
2		2390.000	28.41	30.18	58.59	-15.41	74.00	100	300	Peak
3		2417.125	80.96	30.23	111.19	N/A	N/A	100	300	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

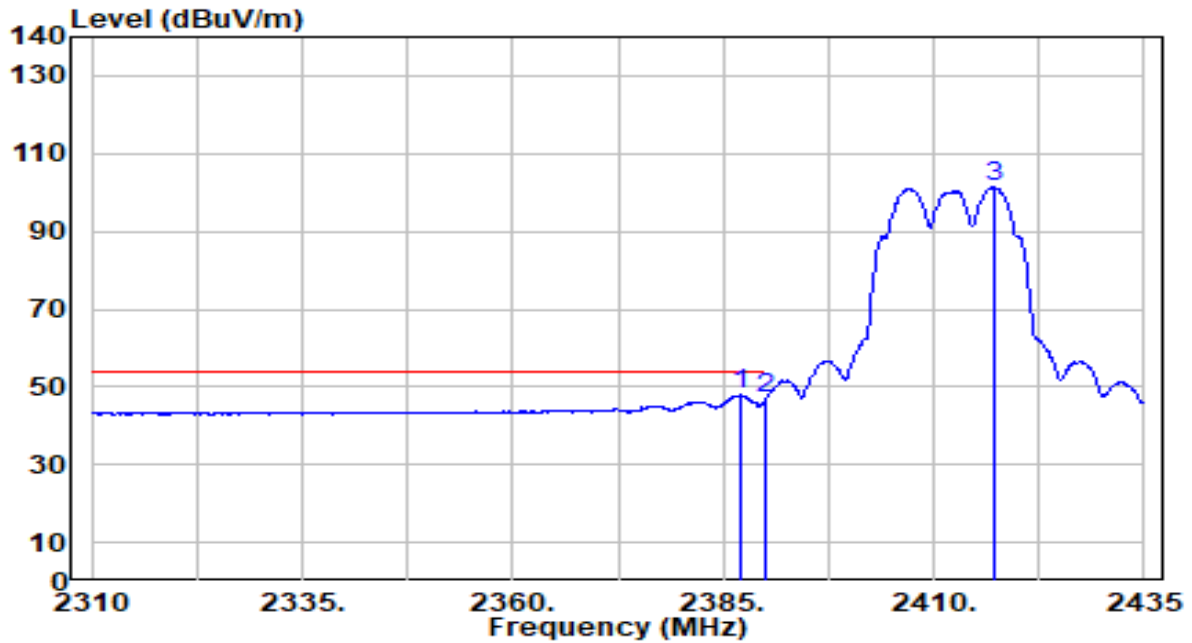


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.125	17.67	30.17	47.84	-6.16	54.00	100	300	Average
2		2390.000	16.66	30.18	46.84	-7.16	54.00	100	300	Average
3		2417.125	71.15	30.23	101.38	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

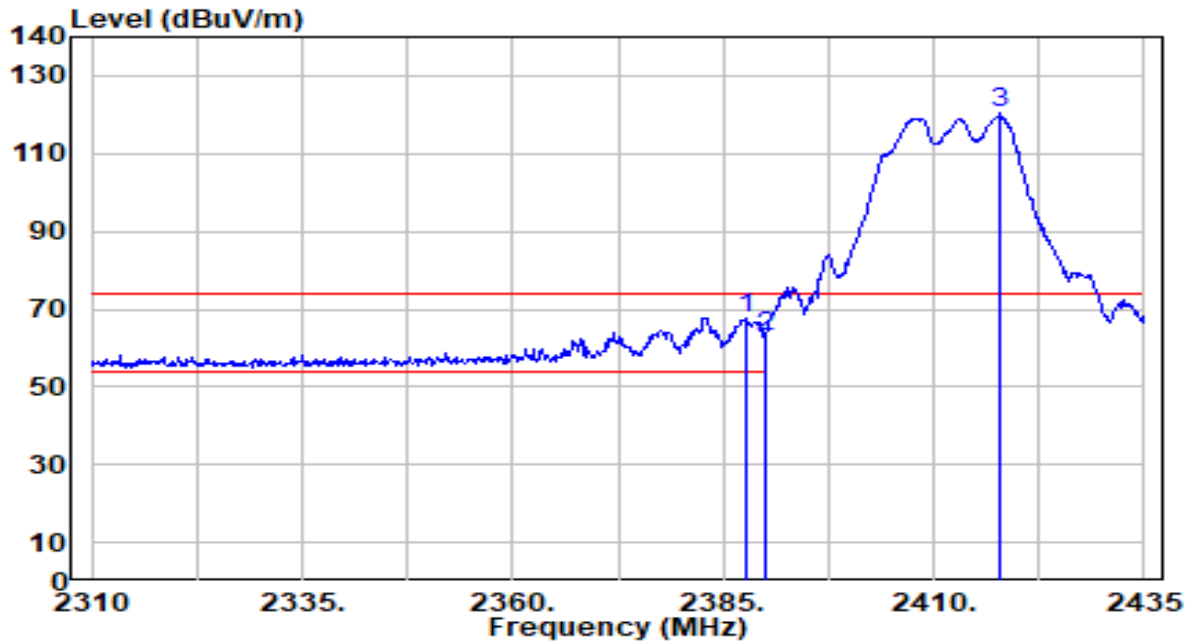


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.750	37.53	30.17	67.70	-6.30	74.00	100	4	Peak
2		2390.000	32.45	30.18	62.63	-11.37	74.00	100	4	Peak
3		2418.000	90.09	30.23	120.32	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

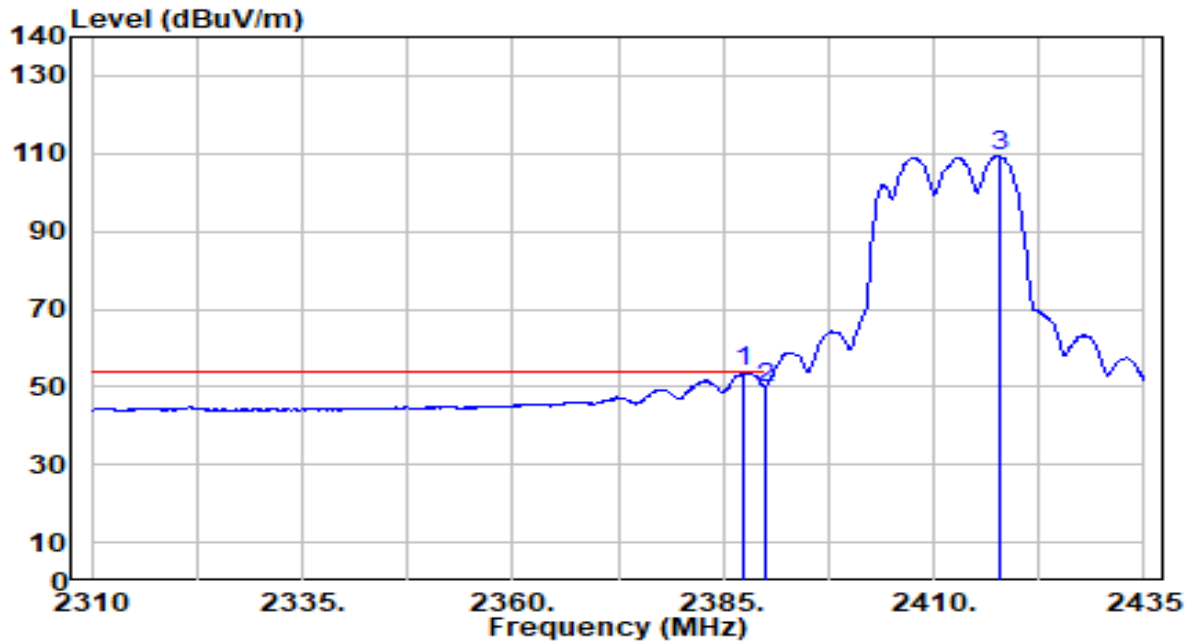


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.500	23.60	30.17	53.77	-0.23	54.00	100	4	Average
2		2390.000	19.47	30.18	49.65	-4.35	54.00	100	4	Average
3		2417.750	79.28	30.23	109.51	N/A	N/A	100	4	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

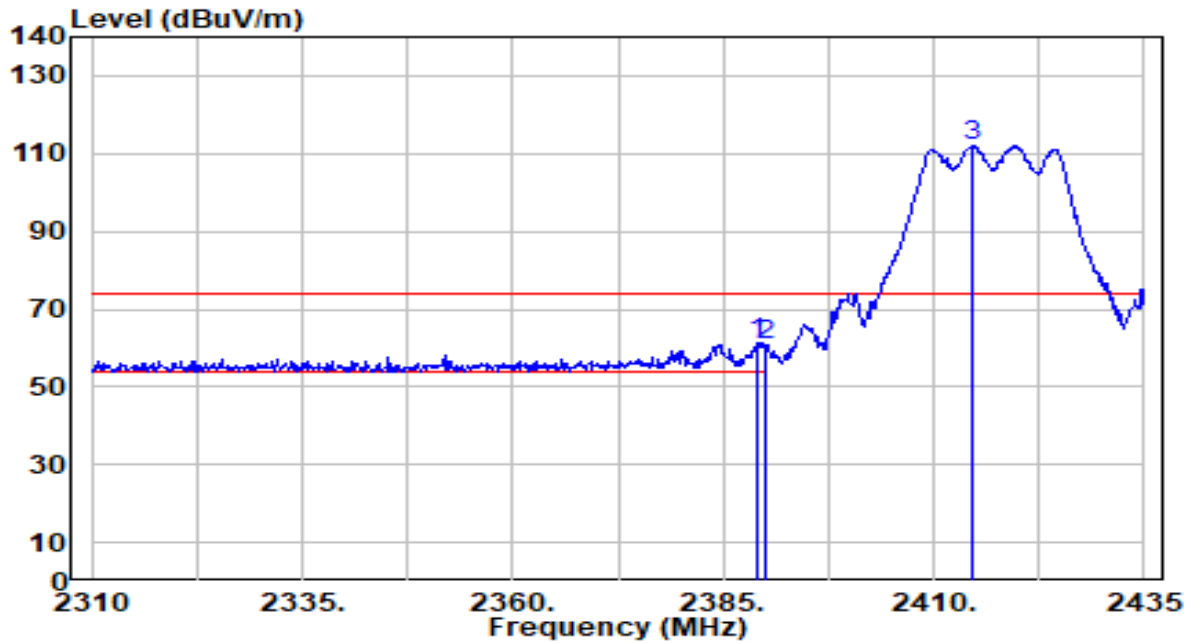


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.000	31.05	30.18	61.23	-12.77	74.00	100	300	Peak
2		2390.000	30.39	30.18	60.57	-13.43	74.00	100	300	Peak
3		2414.625	82.02	30.23	112.25	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

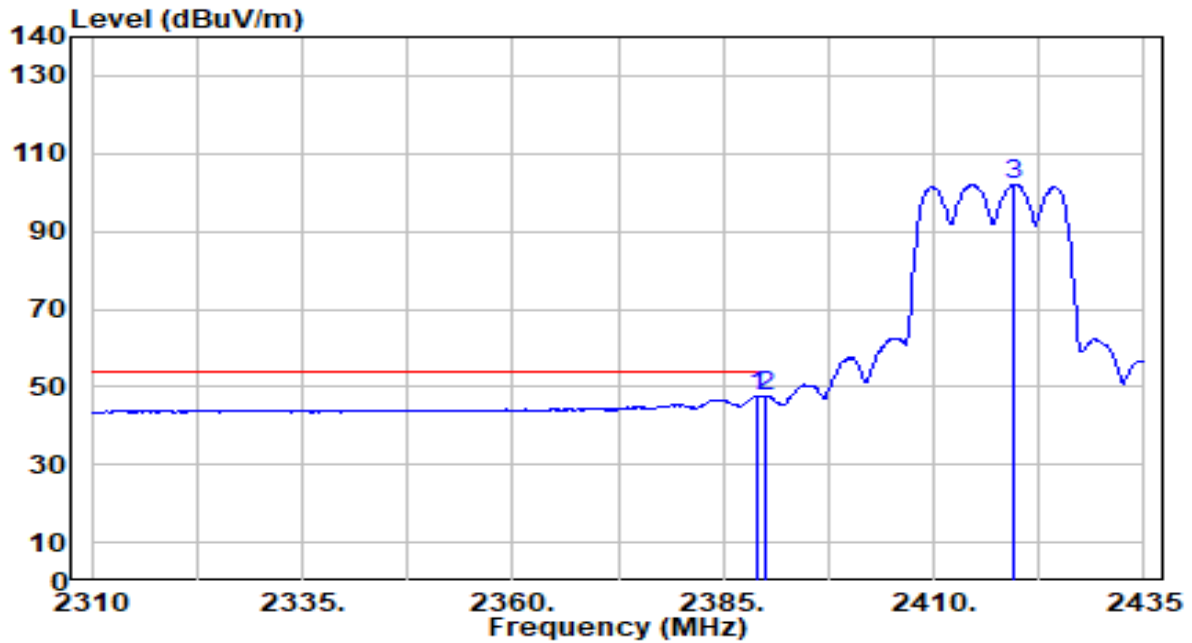


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	17.37	30.18	47.55	-6.45	54.00	100	300	Average
2	* 2390.000	17.38	30.18	47.56	-6.44	54.00	100	300	Average
3	2419.625	71.93	30.23	102.17	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

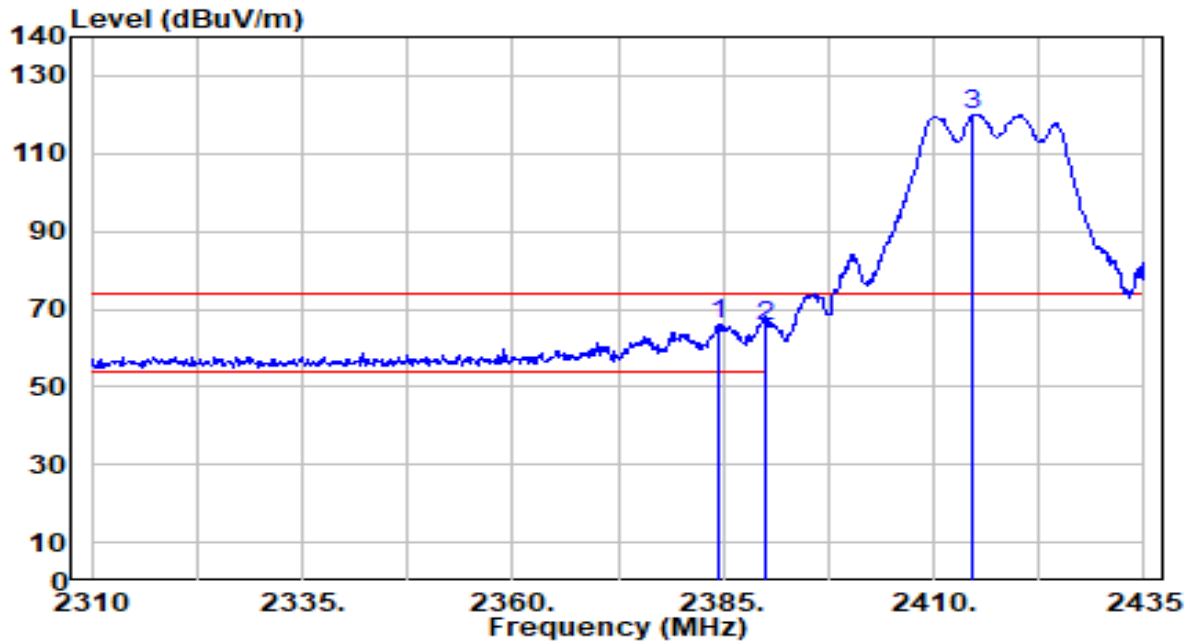


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2384.500	36.06	30.16	66.22	-7.78	74.00	100	4	Peak
2		2390.000	35.57	30.18	65.75	-8.25	74.00	100	4	Peak
3		2414.625	89.83	30.23	120.05	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

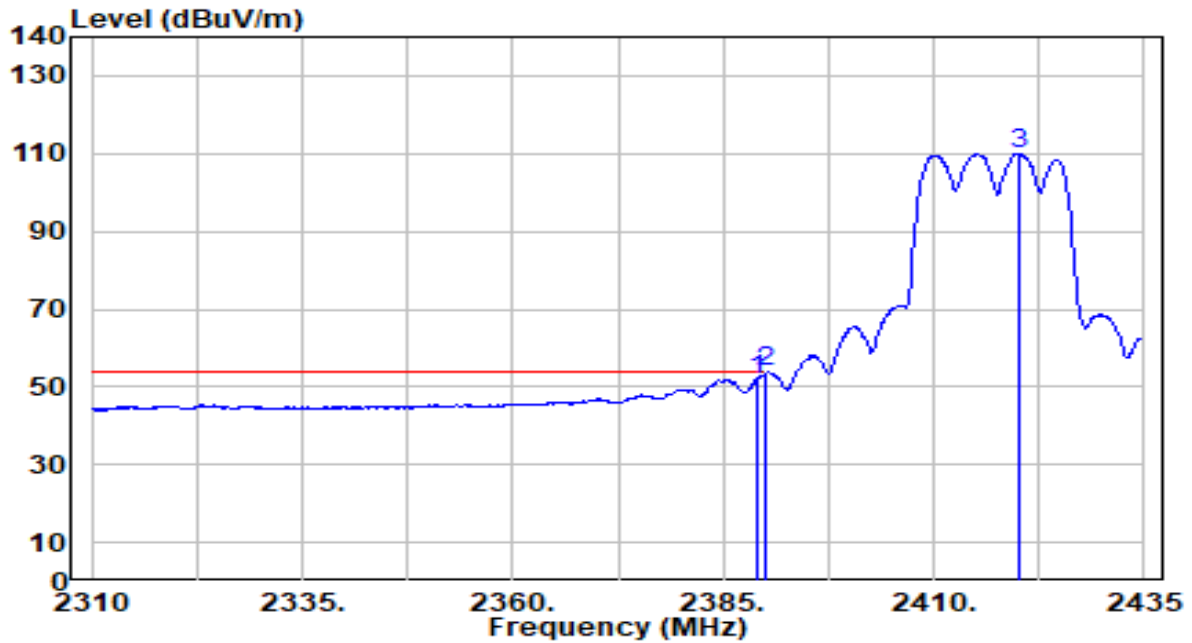


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	21.86	30.18	52.03	-1.97	54.00	100	4	Average
2	* 2390.000	23.54	30.18	53.72	-0.28	54.00	100	4	Average
3	2420.250	79.75	30.23	109.98	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

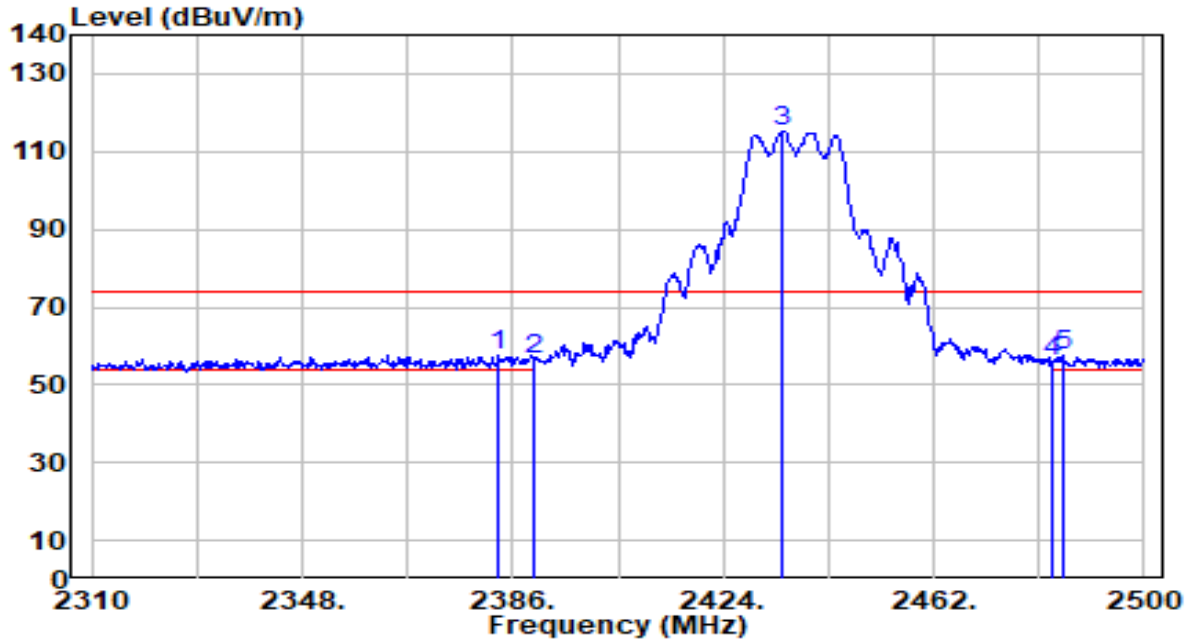


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2383.530	27.48	30.16	57.64	-16.36	74.00	100	300	Peak
2	2390.000	26.28	30.18	56.46	-17.54	74.00	100	300	Peak
3	2434.830	84.90	30.25	115.16	N/A	N/A	100	300	Peak
4	2483.500	25.64	30.32	55.96	-18.04	74.00	100	300	Peak
5	2485.370	27.18	30.32	57.50	-16.50	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

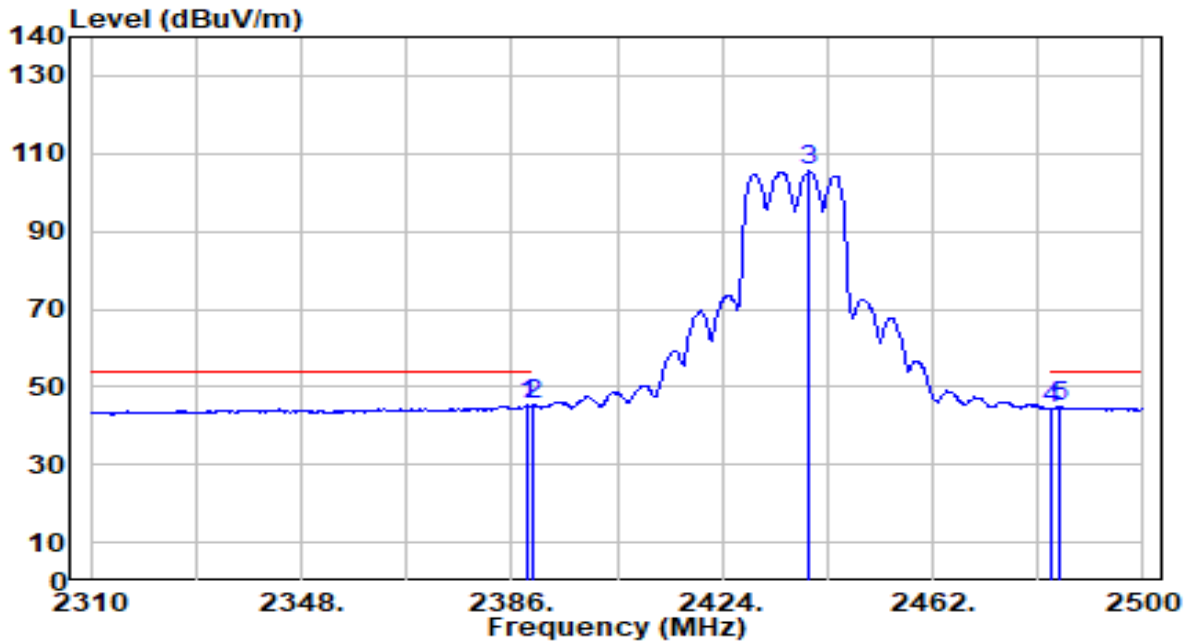


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	15.14	30.18	45.32	-8.68	54.00	100	300	Average
2	* 2390.000	15.33	30.18	45.51	-8.49	54.00	100	300	Average
3	2439.580	75.19	30.26	105.45	N/A	N/A	100	300	Average
4	2483.500	14.07	30.32	44.38	-9.62	54.00	100	300	Average
5	2484.990	14.63	30.32	44.95	-9.05	54.00	100	300	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

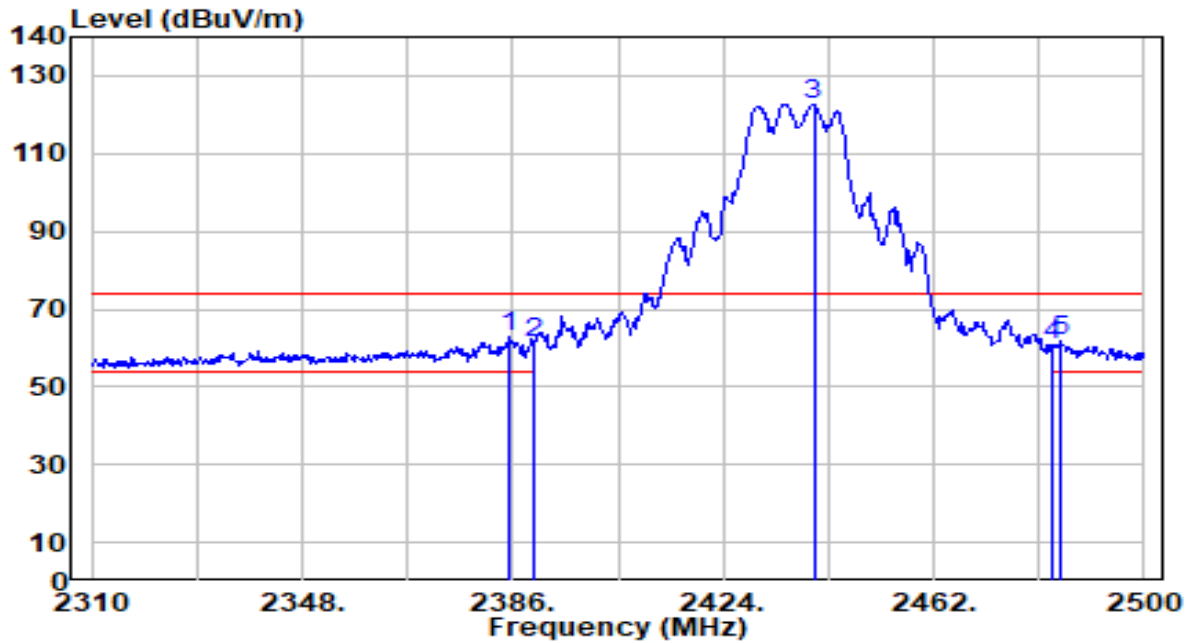


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.240	32.53	30.17	62.70	-11.30	74.00	100	4	Peak
2		2390.000	31.25	30.18	61.43	-12.57	74.00	100	4	Peak
3		2440.340	92.42	30.26	122.68	N/A	N/A	100	4	Peak
4		2483.500	30.22	30.32	60.54	-13.46	74.00	100	4	Peak
5		2484.990	31.53	30.32	61.85	-12.15	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

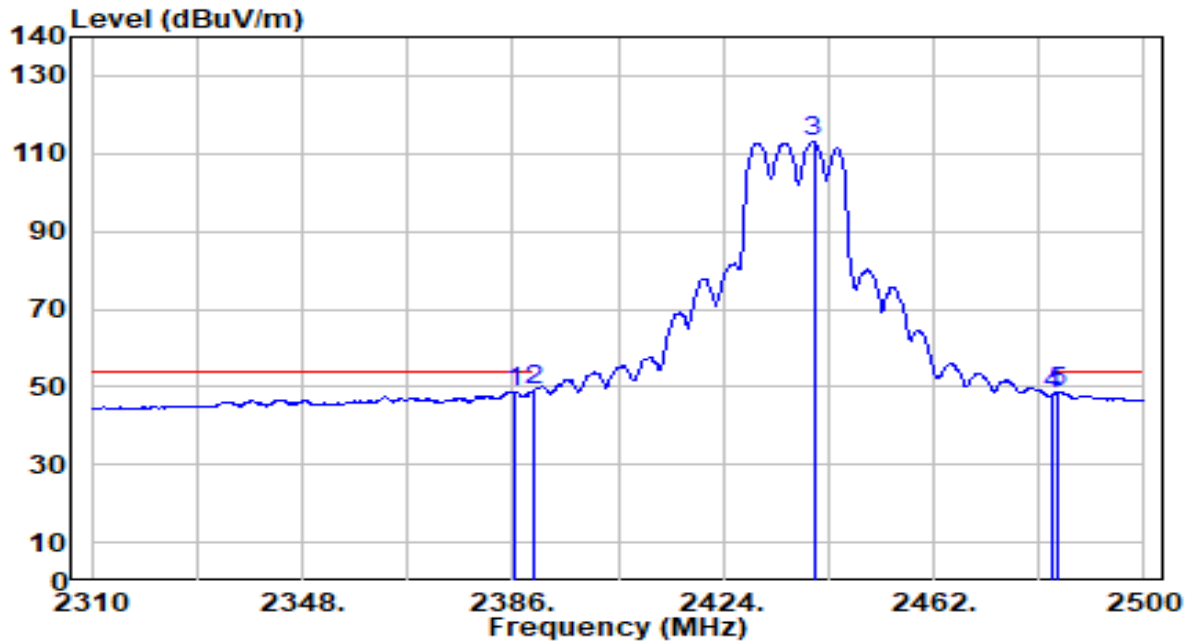


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.570	18.54	30.17	48.71	-5.29	54.00	100	4	Average
2	* 2390.000	19.21	30.18	49.39	-4.61	54.00	100	4	Average
3	2440.340	82.69	30.26	112.95	N/A	N/A	100	4	Average
4	2483.500	17.89	30.32	48.21	-5.79	54.00	100	4	Average
5	2484.610	18.41	30.32	48.73	-5.27	54.00	100	4	Average

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

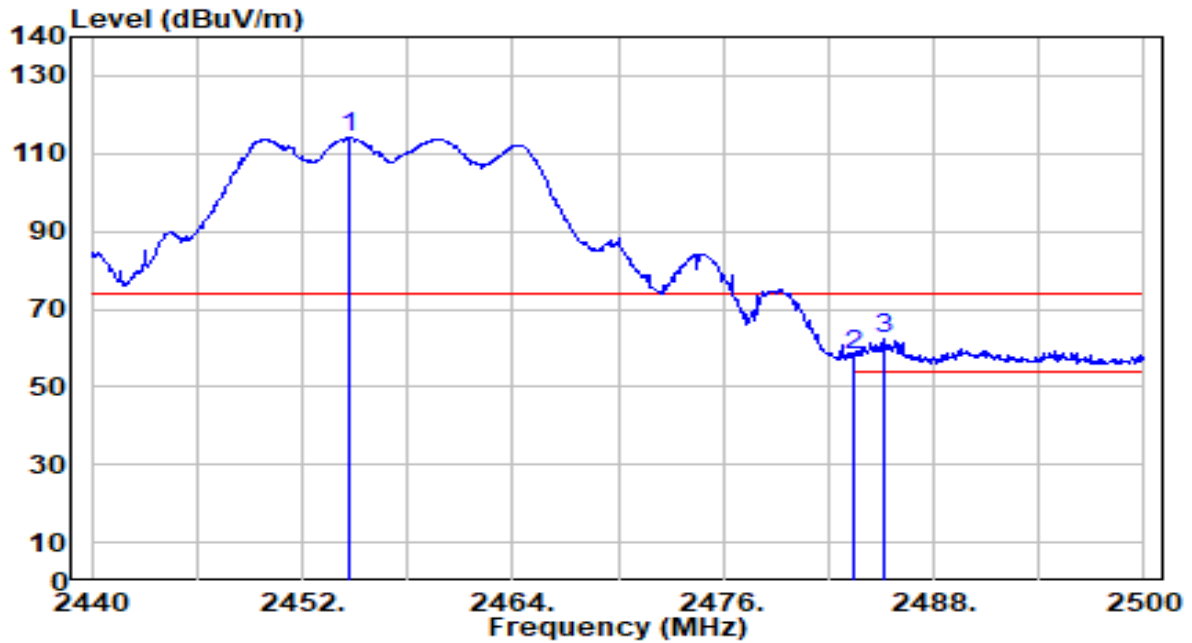


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.640	83.83	30.28	114.11	N/A	N/A	100	300	Peak
2	2483.500	27.99	30.32	58.31	-15.69	74.00	100	300	Peak
3	* 2485.120	31.83	30.32	62.15	-11.85	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

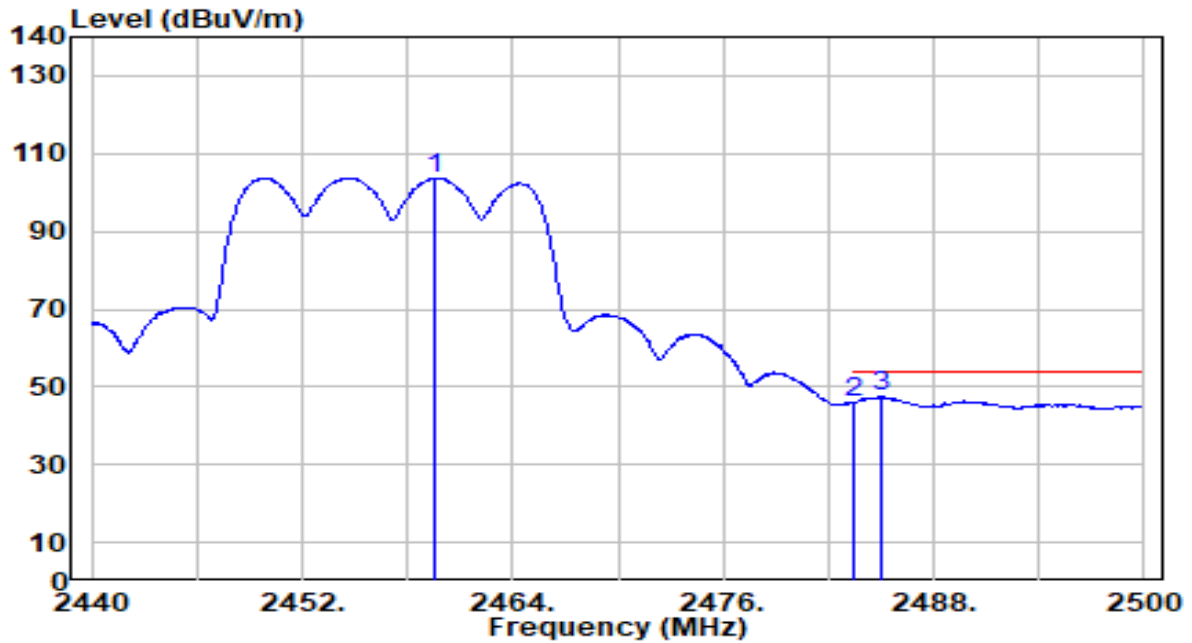


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.620	73.41	30.29	103.70	N/A	N/A	100	300	Average
2	2483.500	15.81	30.32	46.13	-7.87	54.00	100	300	Average
3	* 2484.940	17.10	30.32	47.42	-6.58	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

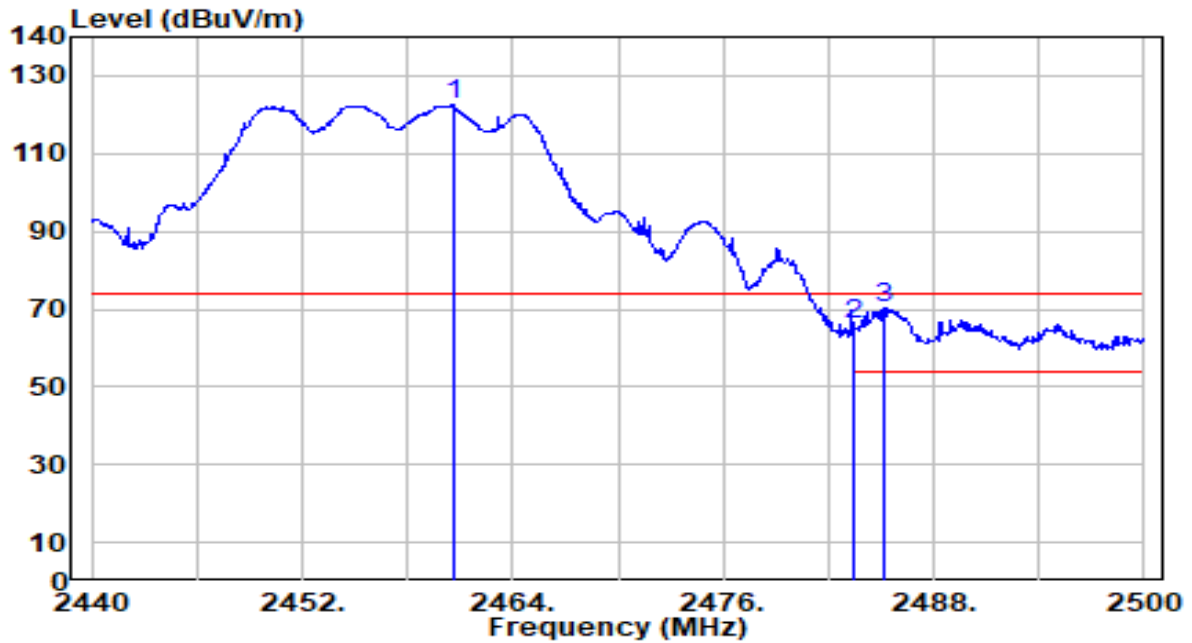


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.700	92.23	30.29	122.52	N/A	N/A	100	4	Peak
2	2483.500	35.64	30.32	65.95	-8.05	74.00	100	4	Peak
3	* 2485.240	39.97	30.32	70.29	-3.71	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

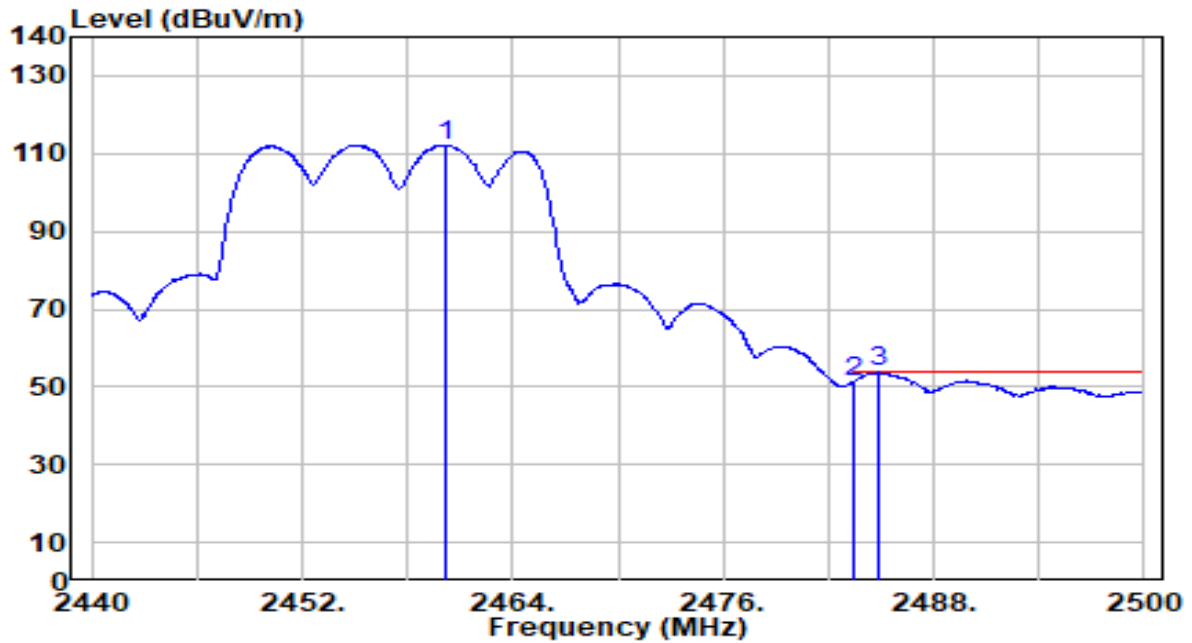


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.220	81.96	30.29	112.25	N/A	N/A	100	4	Average
2	2483.500	21.17	30.32	51.48	-2.52	54.00	100	4	Average
3	* 2484.820	23.44	30.32	53.76	-0.24	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

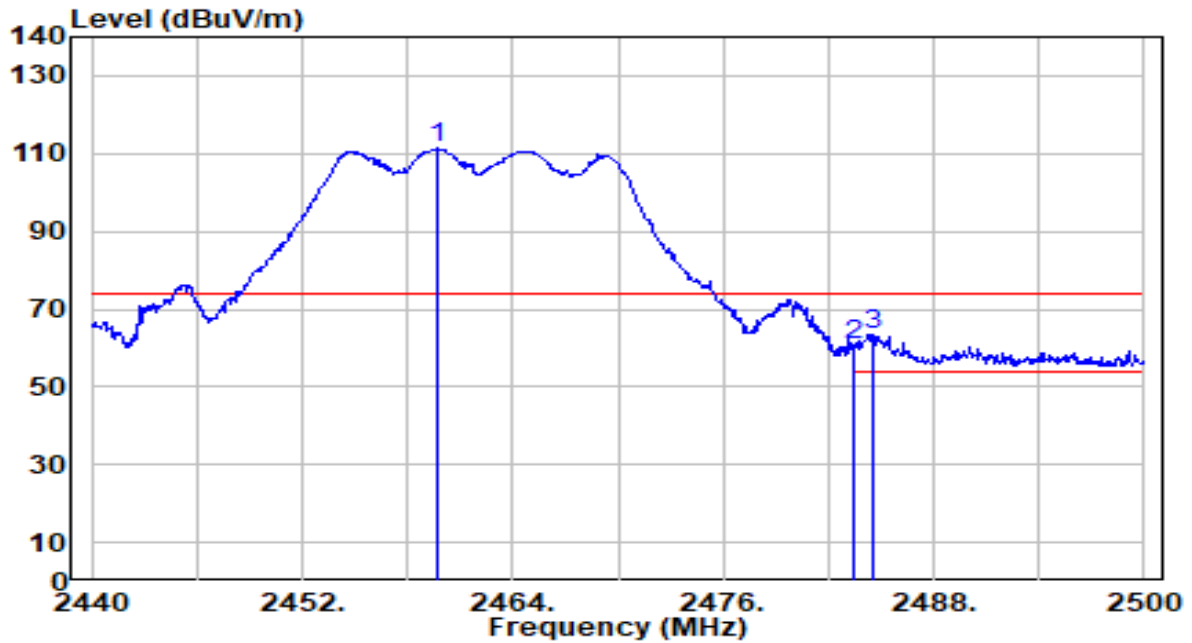


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.680	80.93	30.29	111.22	N/A	N/A	100	300	Peak
2	2483.500	30.41	30.32	60.73	-13.27	74.00	100	300	Peak
3	* 2484.580	32.88	30.32	63.19	-10.81	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

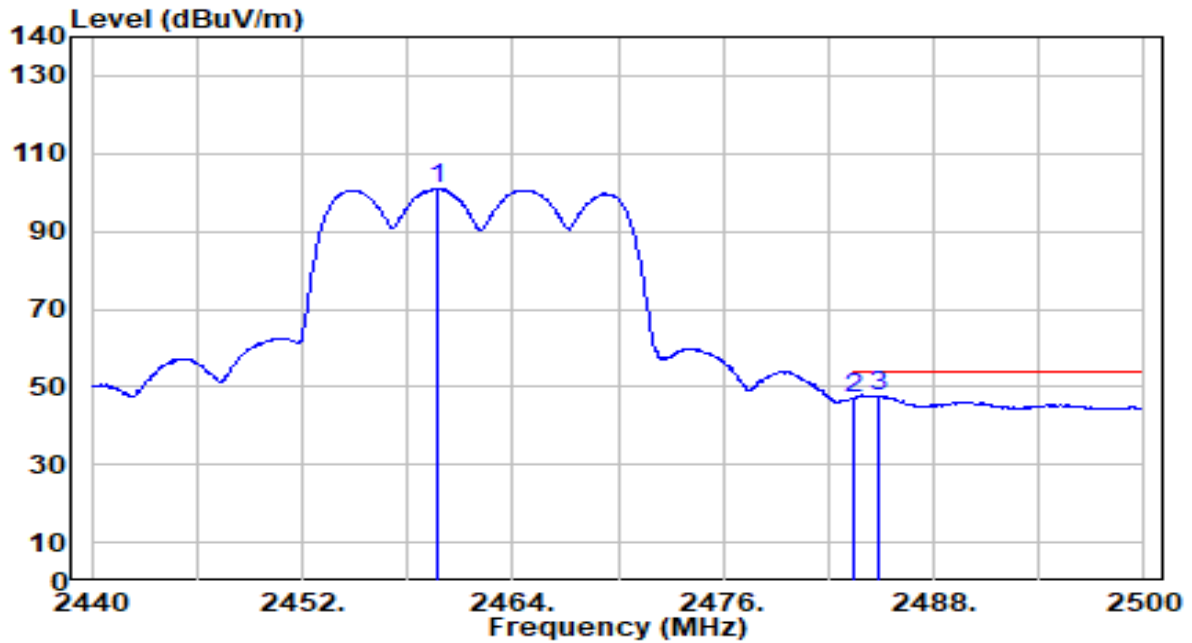


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.740	70.72	30.29	101.01	N/A	N/A	100	300	Average
2	2483.500	16.84	30.32	47.16	-6.84	54.00	100	300	Average
3	* 2484.820	17.38	30.32	47.70	-6.30	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

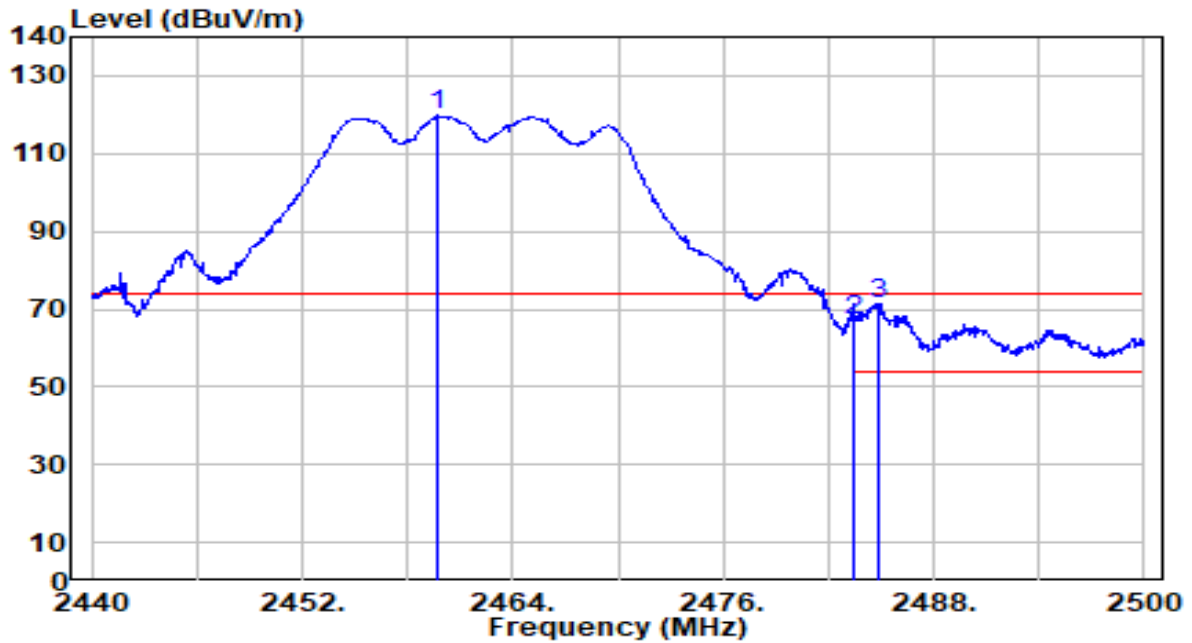


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.680	89.41	30.29	119.70	N/A	N/A	100	4	Peak
2	2483.500	36.92	30.32	67.24	-6.76	74.00	100	4	Peak
3	* 2484.820	40.90	30.32	71.22	-2.78	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

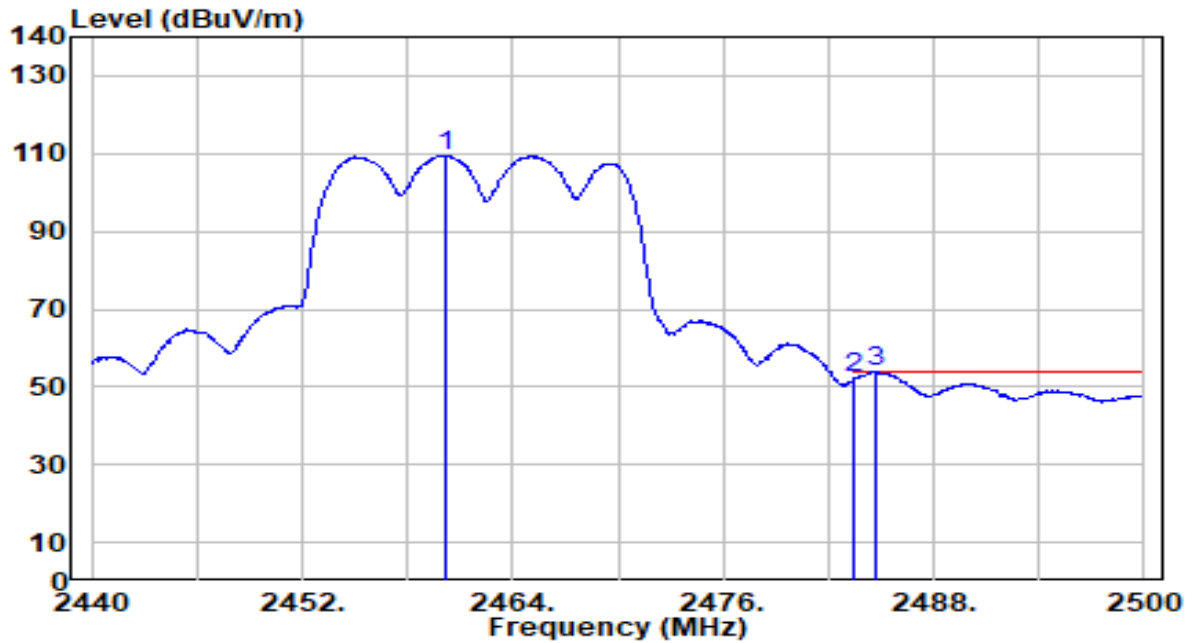


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.220	79.24	30.29	109.53	N/A	N/A	100	4	Average
2	2483.500	21.75	30.32	52.06	-1.94	54.00	100	4	Average
3	* 2484.640	23.57	30.32	53.89	-0.11	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

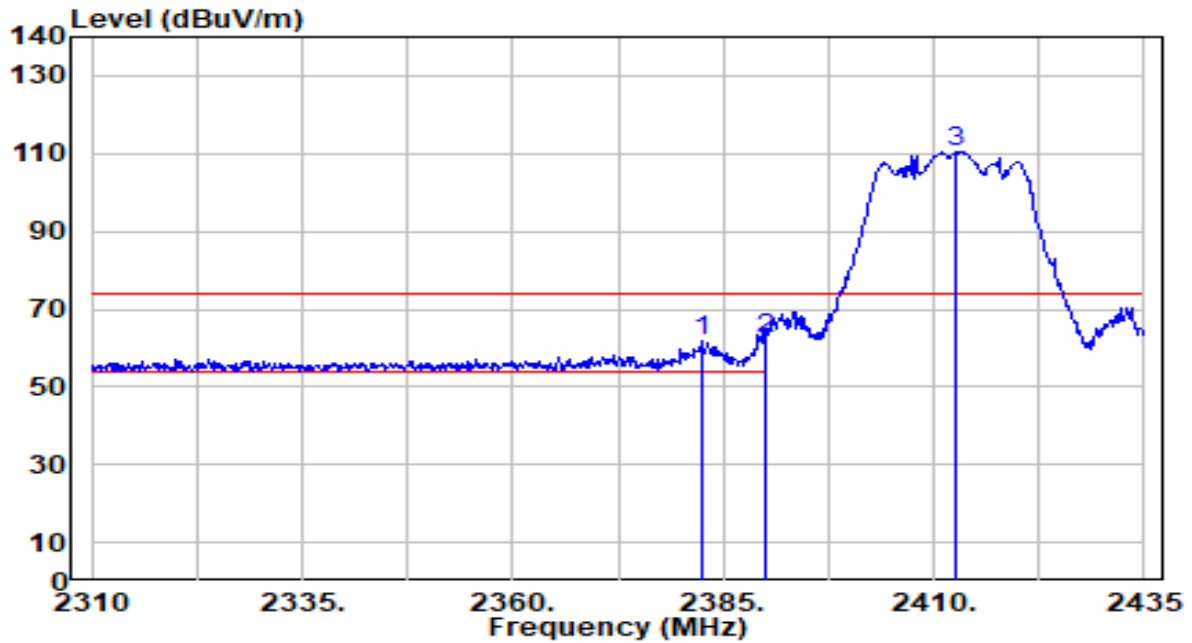


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.500	31.82	30.16	61.98	-12.02	74.00	100	300	Peak
2	* 2390.000	31.90	30.18	62.08	-11.92	74.00	100	300	Peak
3	2412.625	80.41	30.22	110.64	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

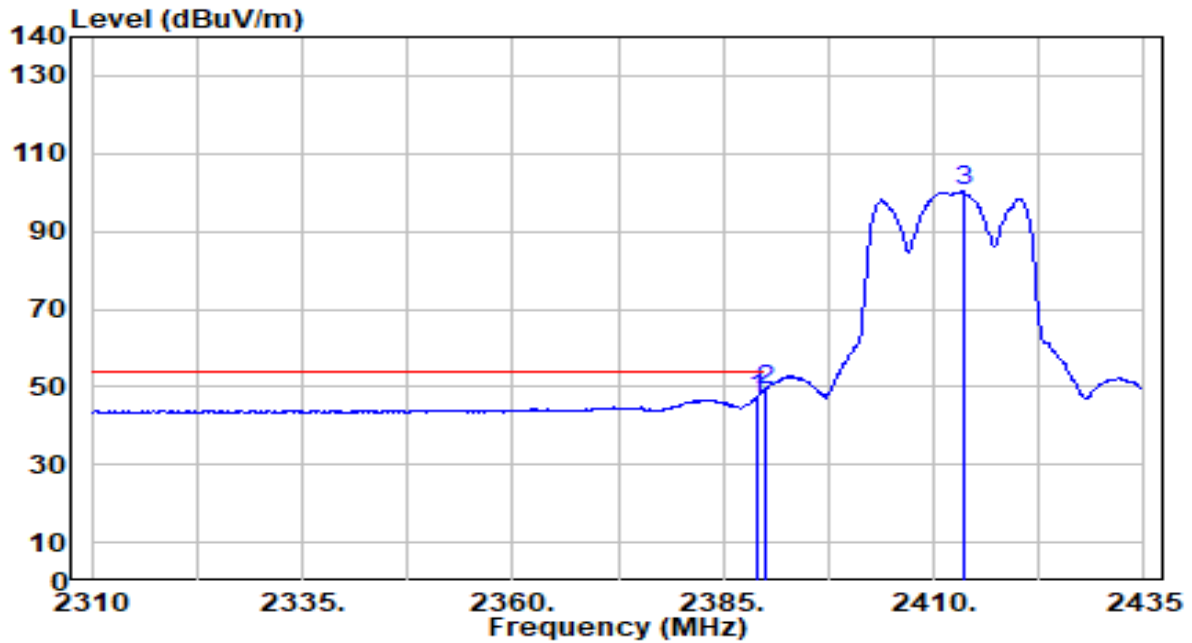


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	16.89	30.18	47.07	-6.93	54.00	100	300	Average
2	* 2390.000	19.16	30.18	49.34	-4.66	54.00	100	300	Average
3	2413.500	70.07	30.23	100.30	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

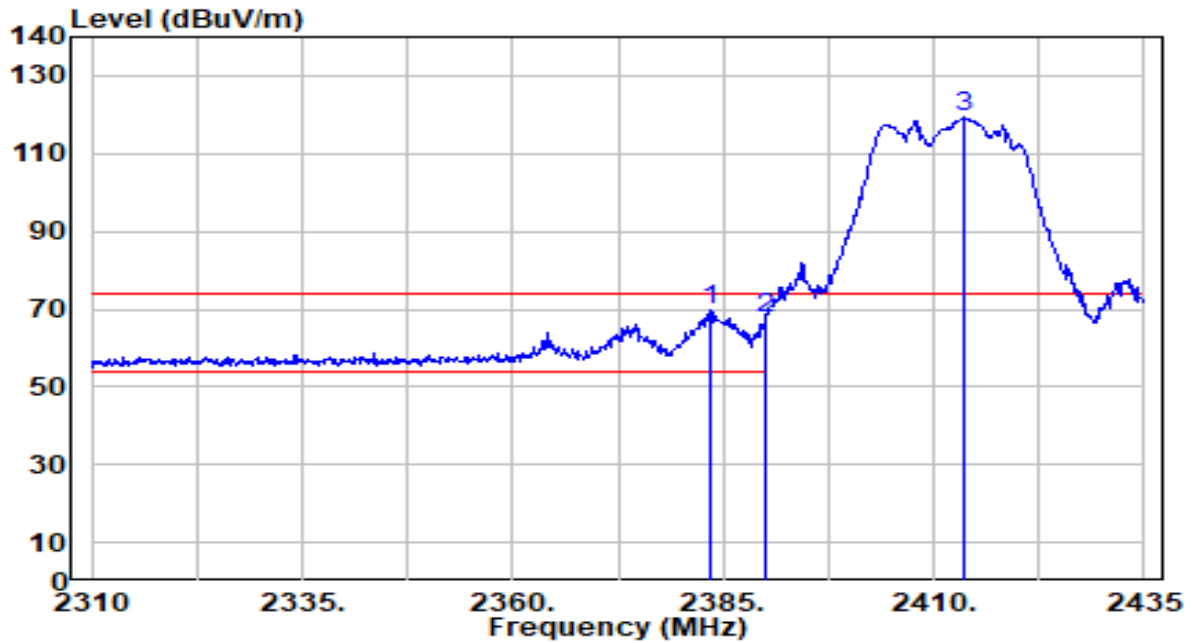


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39.57	30.16	69.73	-4.27	74.00	100	4	Peak
2		37.70	30.18	67.88	-6.12	74.00	100	4	Peak
3		88.93	30.23	119.16	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

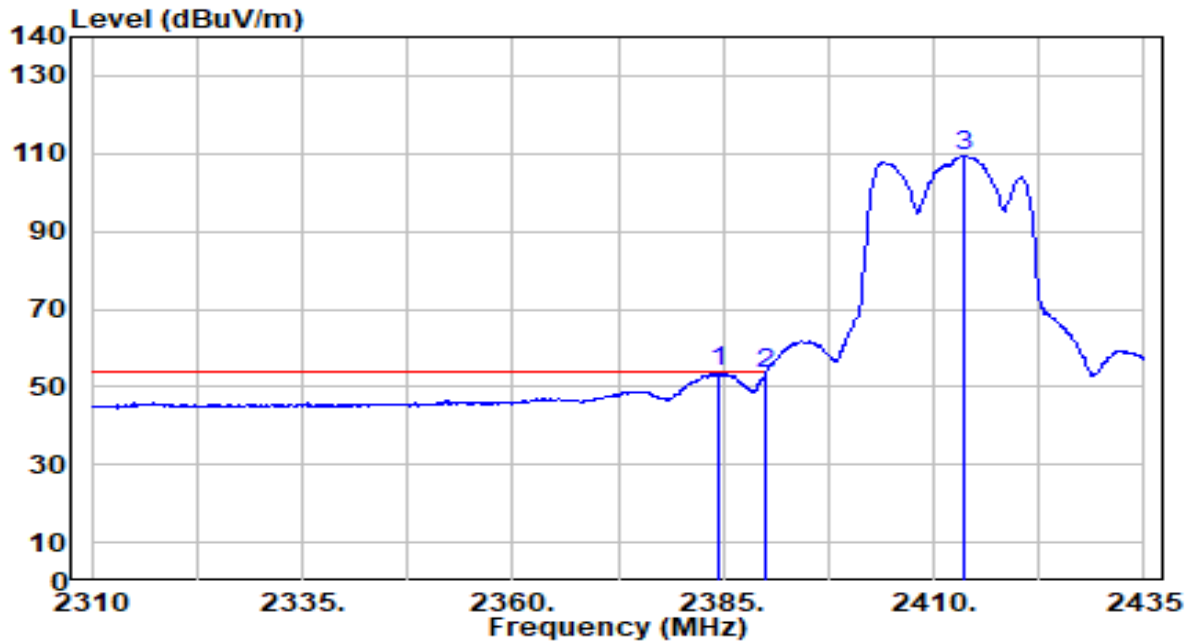


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2384.500	23.60	30.16	53.76	-0.24	54.00	100	4	Average
2		2390.000	22.97	30.18	53.15	-0.85	54.00	100	4	Average
3		2413.500	79.18	30.23	109.41	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

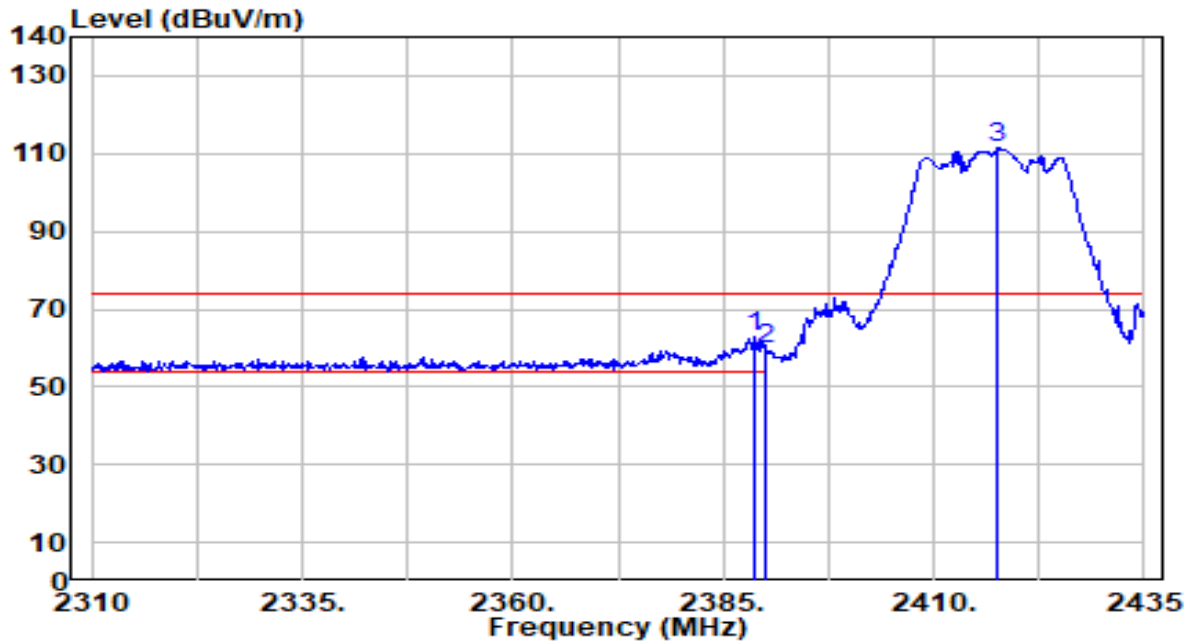


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	32.69	30.18	62.87	-11.13	74.00	100	300	Peak
2		29.68	30.18	59.86	-14.14	74.00	100	300	Peak
3		81.04	30.23	111.27	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

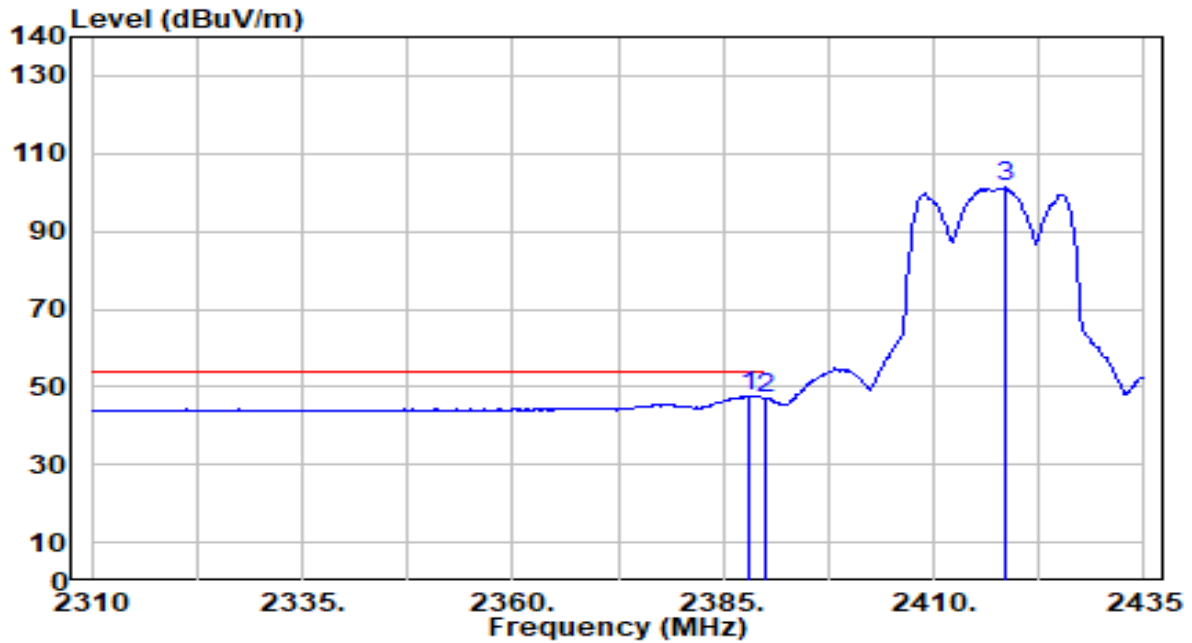


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.000	17.44	30.17	47.61	-6.39	54.00	100	300	Average
2		2390.000	16.71	30.18	46.89	-7.11	54.00	100	300	Average
3		2418.500	70.94	30.23	101.17	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

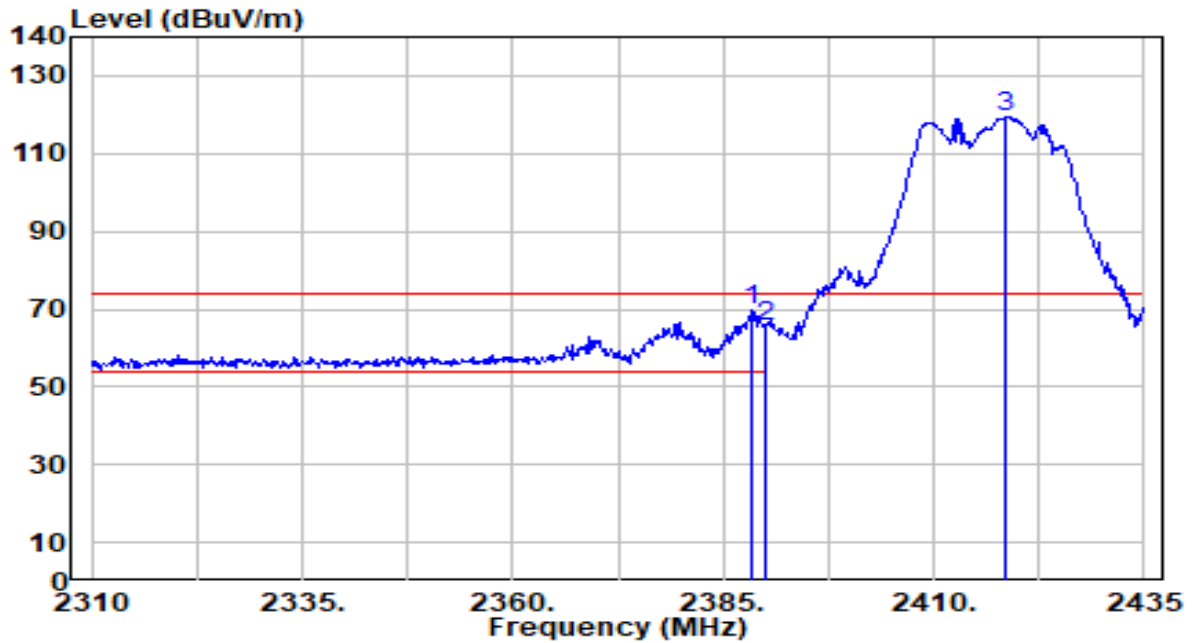


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.500	39.38	30.18	69.55	-4.45	74.00	100	4	Peak
2	2390.000	35.50	30.18	65.68	-8.32	74.00	100	4	Peak
3	2418.500	89.27	30.23	119.50	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

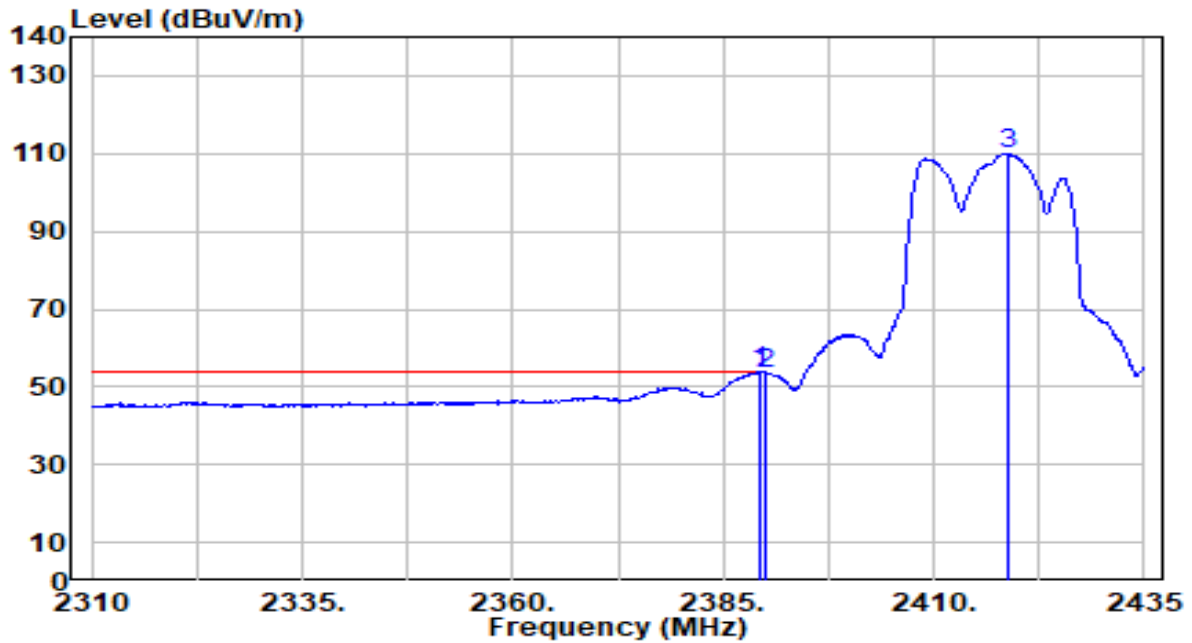


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.68	30.18	53.86	-0.14	54.00	100	4	Average
2		23.24	30.18	53.42	-0.58	54.00	100	4	Average
3		79.69	30.23	109.93	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

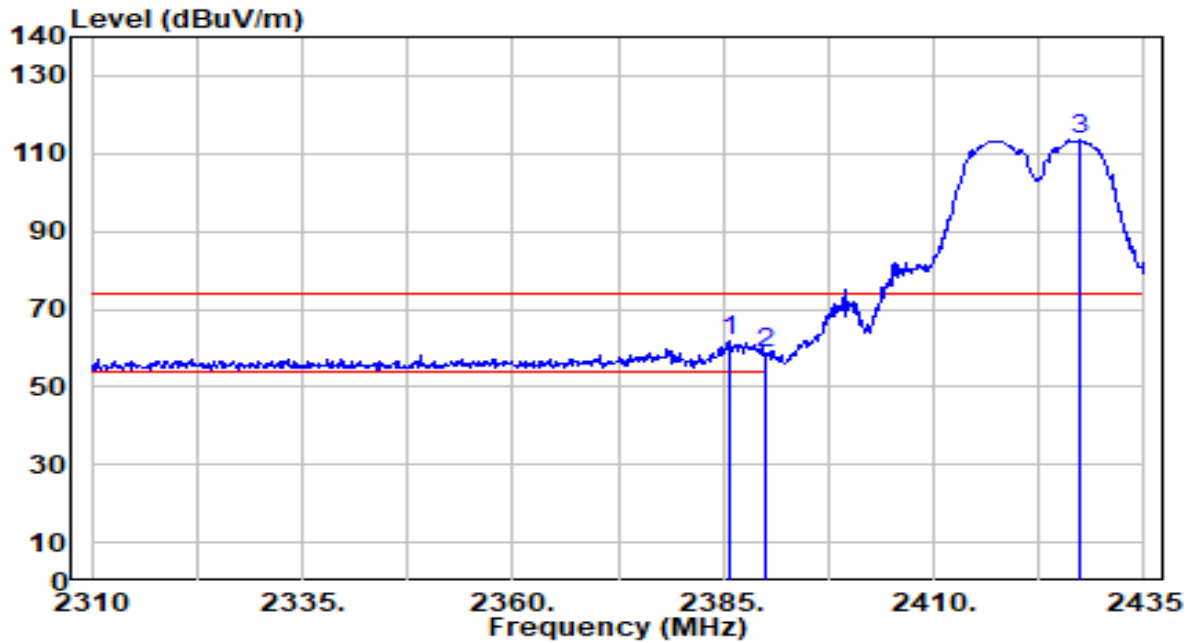


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.625	31.63	30.17	61.79	-12.21	74.00	100	300	Peak
2		2390.000	28.52	30.18	58.70	-15.30	74.00	100	300	Peak
3		2427.500	83.15	30.24	113.40	N/A	N/A	100	300	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

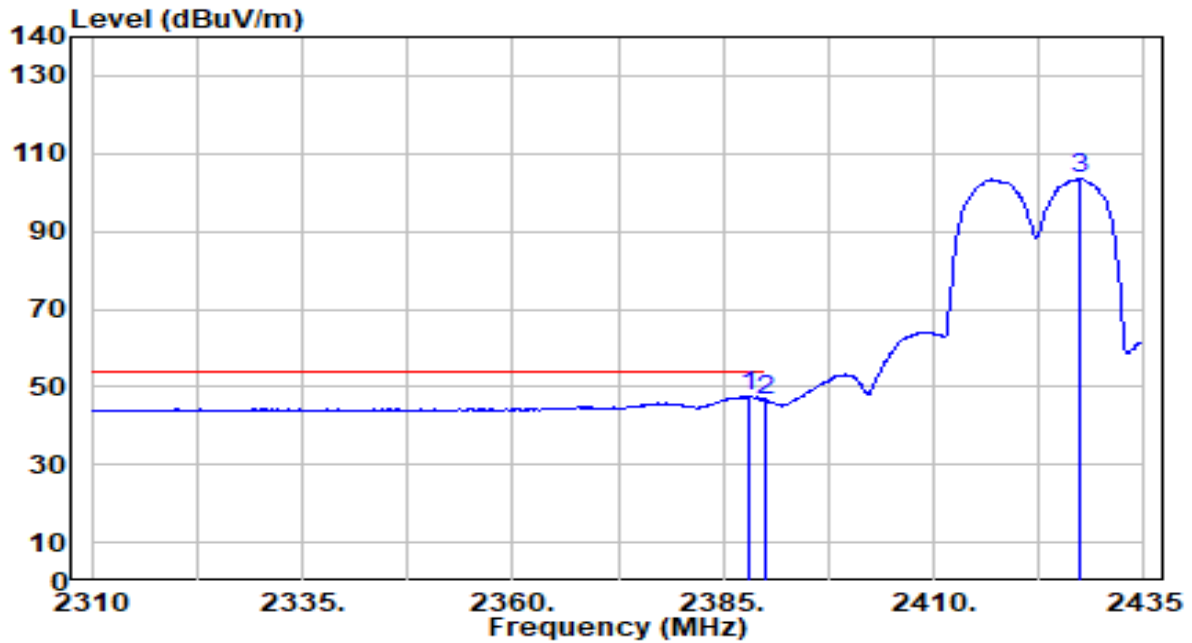


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.000	17.29	30.17	47.46	-6.54	54.00	100	300	Average
2		2390.000	16.41	30.18	46.59	-7.41	54.00	100	300	Average
3		2427.375	73.34	30.24	103.58	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

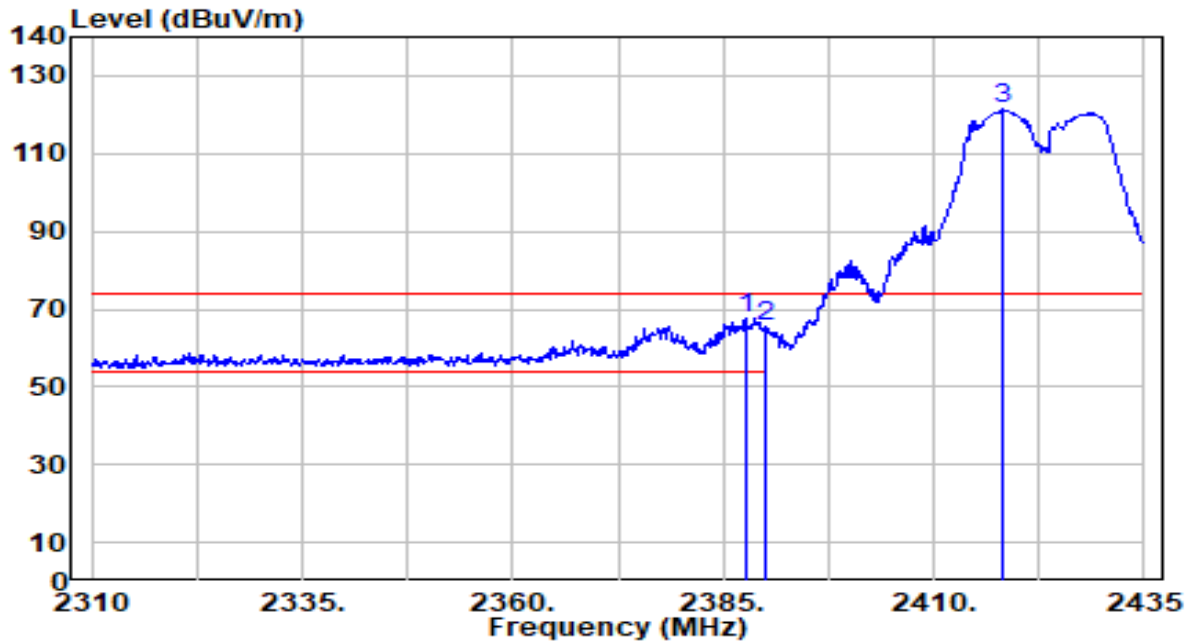


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.625	37.33	30.17	67.51	-6.49	74.00	100	4	Peak
2		2390.000	35.07	30.18	65.25	-8.75	74.00	100	4	Peak
3		2418.125	91.23	30.23	121.46	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

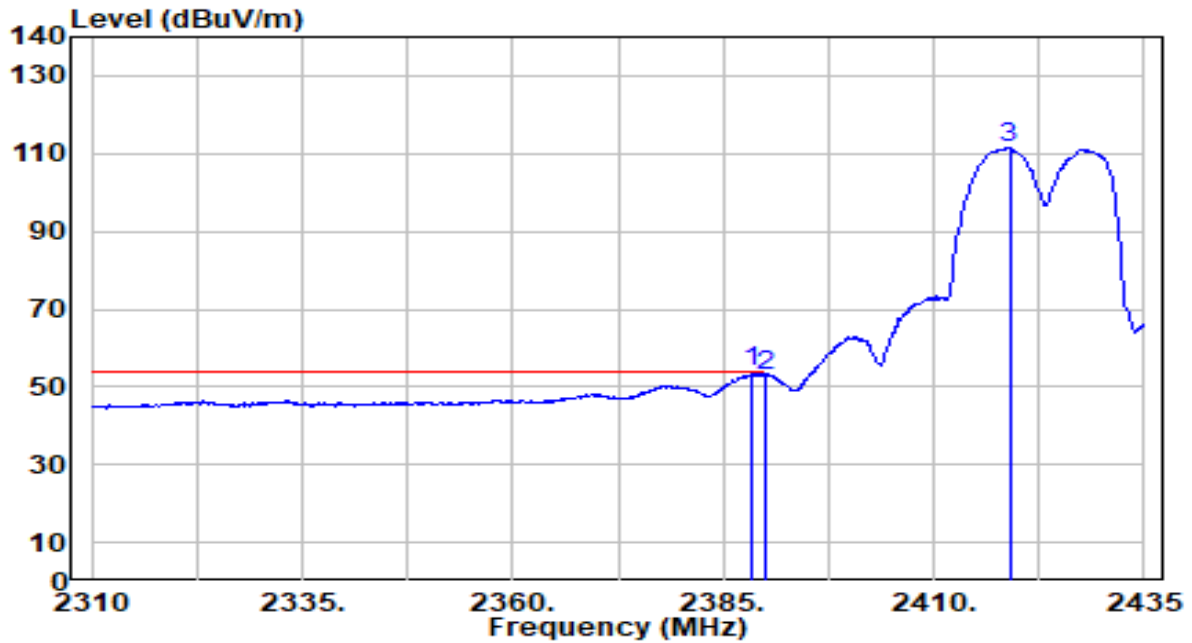


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.58	30.18	53.76	-0.24	54.00	100	4	Average
2		22.78	30.18	52.96	-1.04	54.00	100	4	Average
3		81.11	30.23	111.35	N/A	N/A	100	4	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

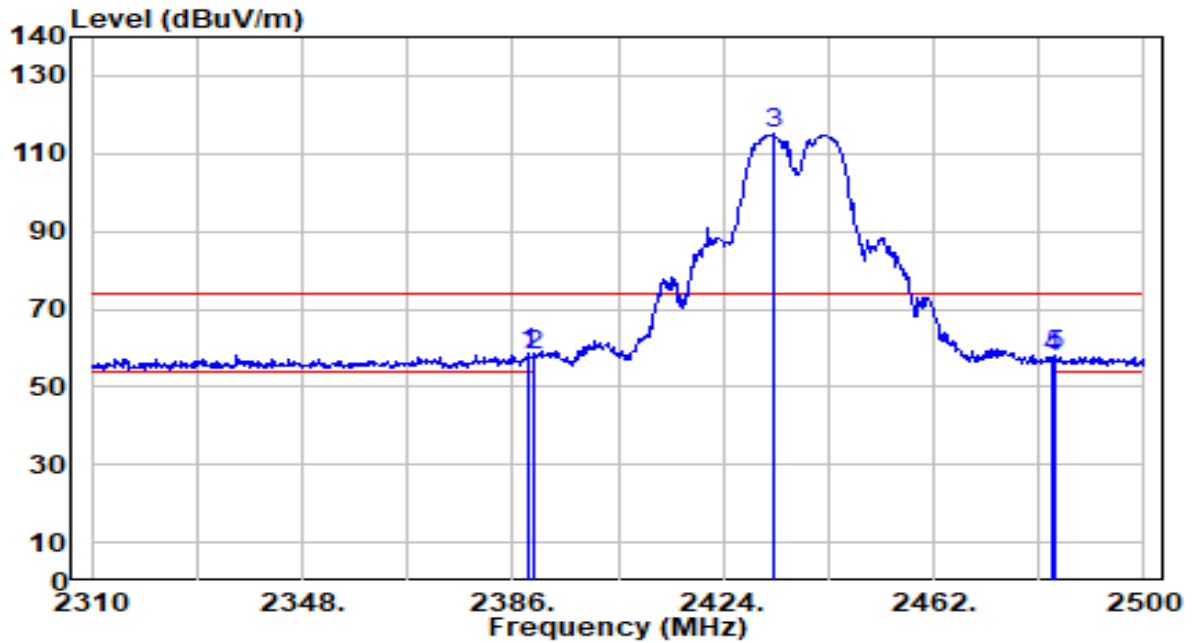


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.660	28.37	30.18	58.55	-15.45	74.00	100	300	Peak
2		2390.000	27.70	30.18	57.88	-16.12	74.00	100	300	Peak
3		2433.120	84.76	30.25	115.01	N/A	N/A	100	300	Peak
4		2483.500	27.23	30.32	57.55	-16.45	74.00	100	300	Peak
5		2484.040	27.54	30.32	57.86	-16.14	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

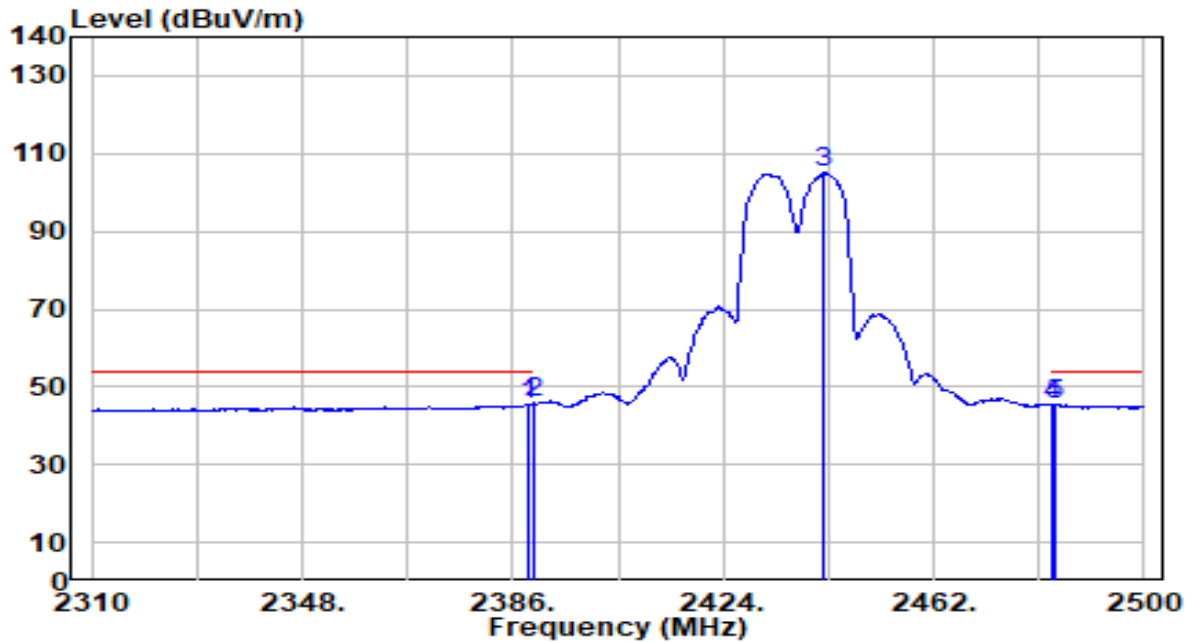


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	15.25	30.18	45.42	-8.58	54.00	100	300	Average
2	* 2390.000	15.57	30.18	45.75	-8.25	54.00	100	300	Average
3	2442.240	74.74	30.26	105.00	N/A	N/A	100	300	Average
4	2483.500	14.91	30.32	45.23	-8.77	54.00	100	300	Average
5	2484.040	15.12	30.32	45.44	-8.56	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

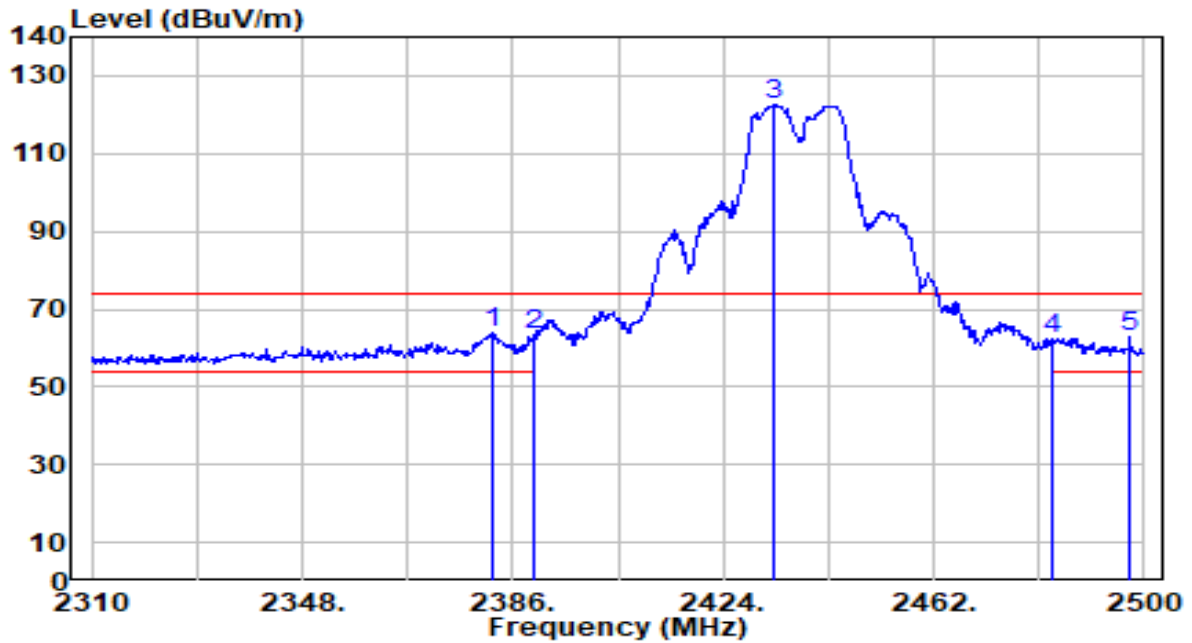


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2382.200	33.52	30.16	63.68	-10.32	74.00	100	4	Peak
2	2390.000	33.07	30.18	63.25	-10.75	74.00	100	4	Peak
3	2433.310	92.31	30.25	122.56	N/A	N/A	100	4	Peak
4	2483.500	32.14	30.32	62.45	-11.55	74.00	100	4	Peak
5	2497.340	32.41	30.34	62.74	-11.26	74.00	100	4	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

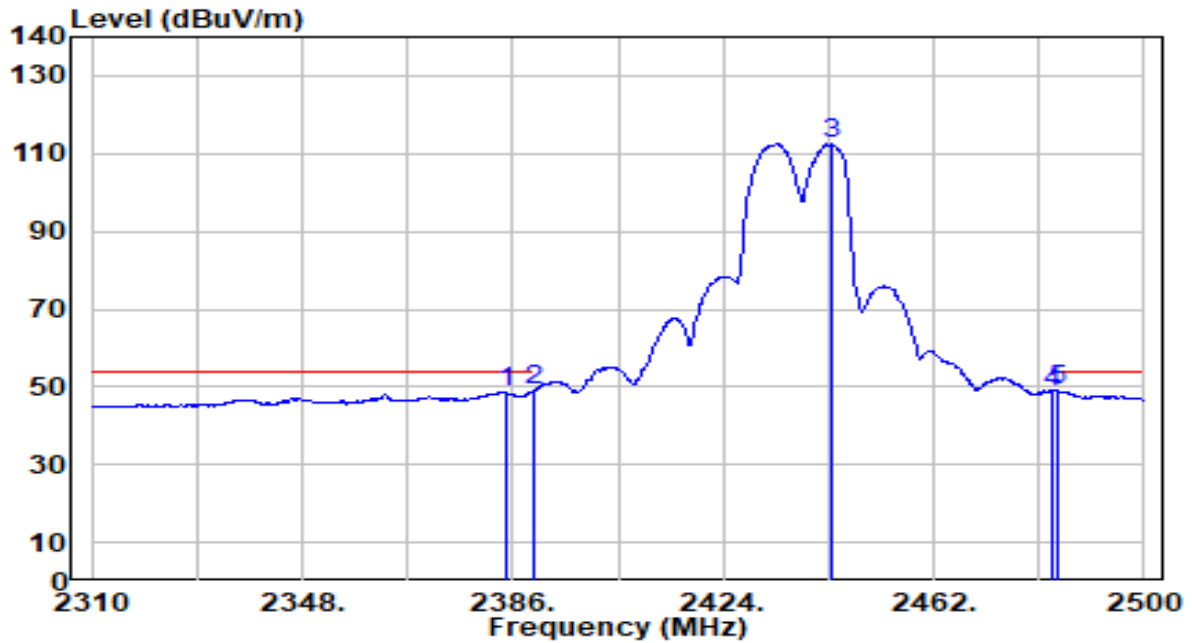


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.670	18.40	30.16	48.56	-5.44	54.00	100	4	Average
2	* 2390.000	19.13	30.18	49.31	-4.69	54.00	100	4	Average
3	2443.760	82.20	30.27	112.46	N/A	N/A	100	4	Average
4	2483.500	18.50	30.32	48.82	-5.18	54.00	100	4	Average
5	2484.420	18.73	30.32	49.04	-4.96	54.00	100	4	Average

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

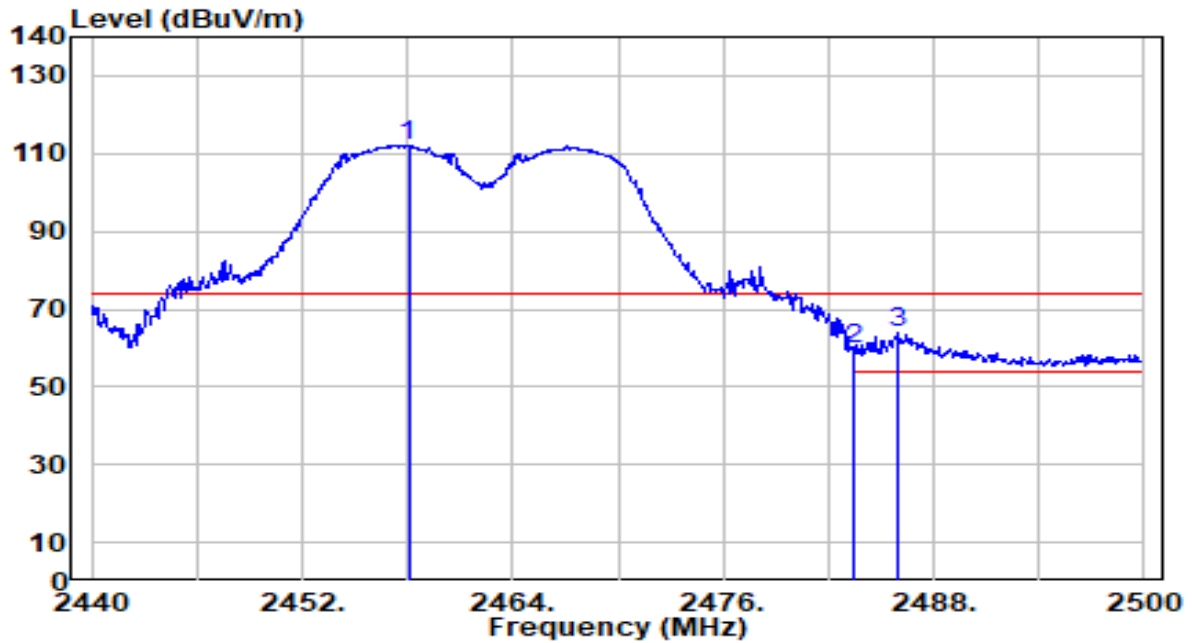


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.060	81.92	30.28	112.20	N/A	N/A	100	300	Peak
2	2483.500	29.53	30.32	59.85	-14.15	74.00	100	300	Peak
3	* 2485.900	33.40	30.32	63.72	-10.28	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

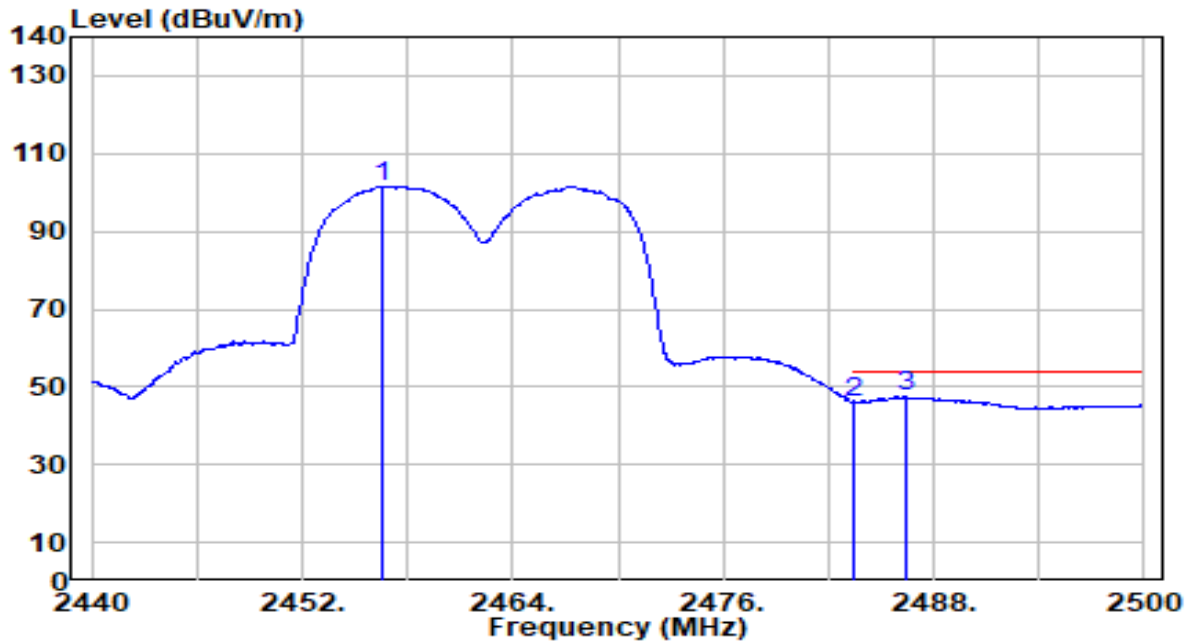


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.560	71.38	30.28	101.66	N/A	N/A	100	300	Average
2	2483.500	15.62	30.32	45.94	-8.06	54.00	100	300	Average
3	* 2486.500	17.13	30.32	47.46	-6.54	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

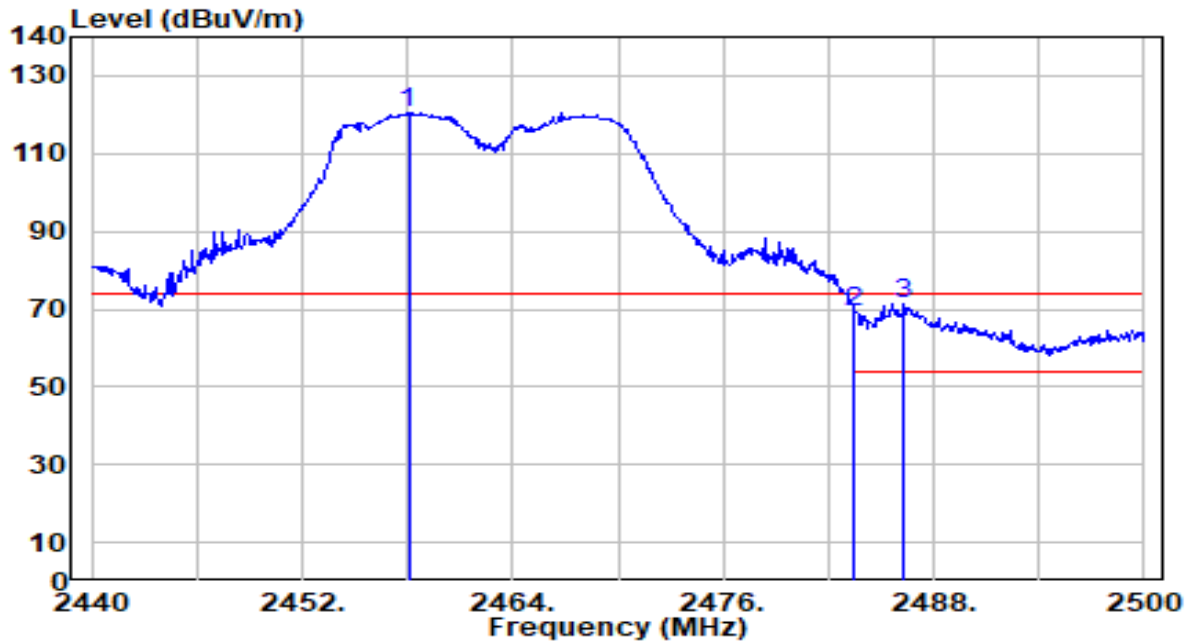


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.060	90.17	30.28	120.45	N/A	N/A	100	4	Peak
2	2483.500	38.90	30.32	69.21	-4.79	74.00	100	4	Peak
3	* 2486.260	41.16	30.32	71.48	-2.52	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

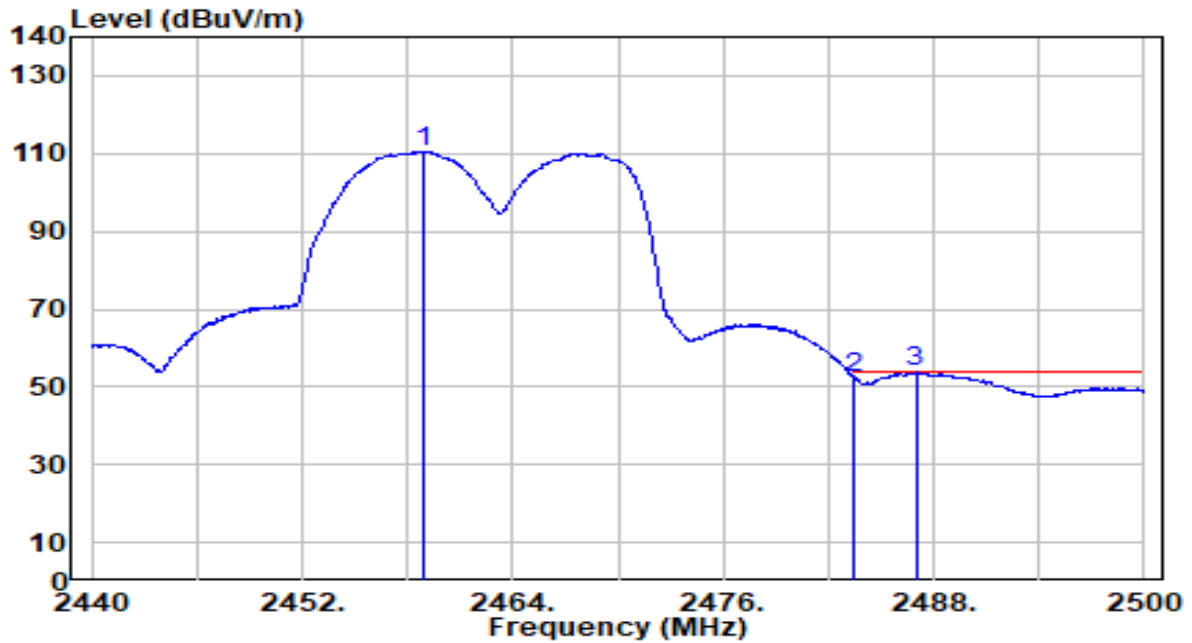


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.960	80.21	30.29	110.49	N/A	N/A	100	4	Average
2	2483.500	22.02	30.32	52.34	-1.66	54.00	100	4	Average
3	* 2486.980	23.34	30.32	53.66	-0.34	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

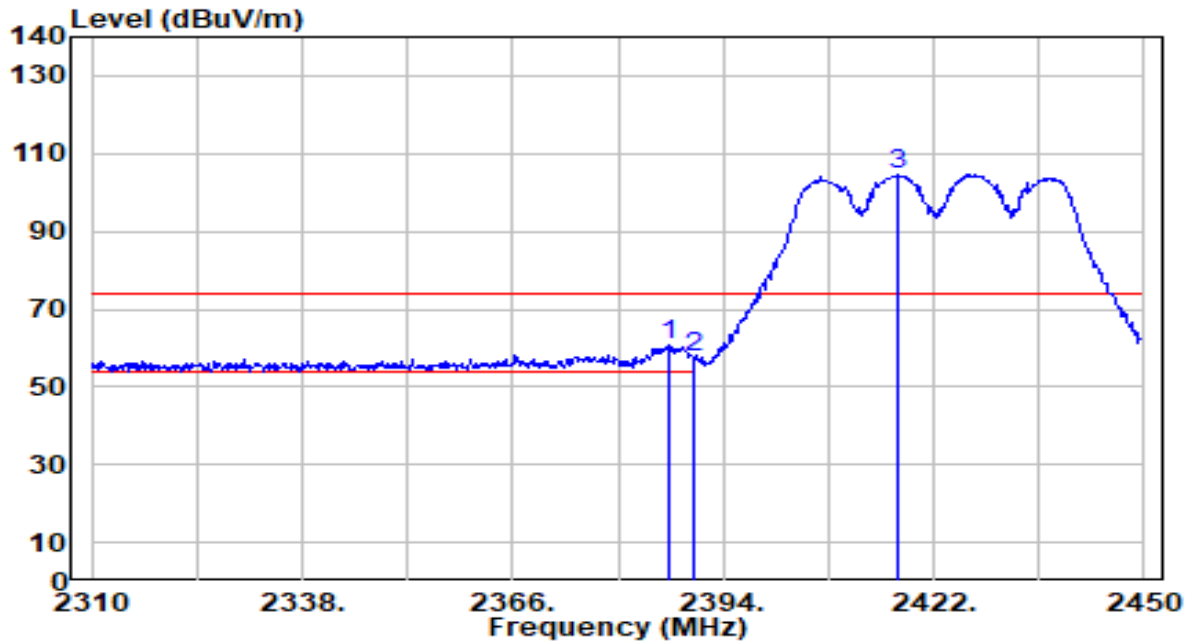


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.720	30.66	30.17	60.83	-13.17	74.00	100	300	Peak
2		2390.000	27.39	30.18	57.57	-16.43	74.00	100	300	Peak
3		2417.380	74.56	30.23	104.79	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

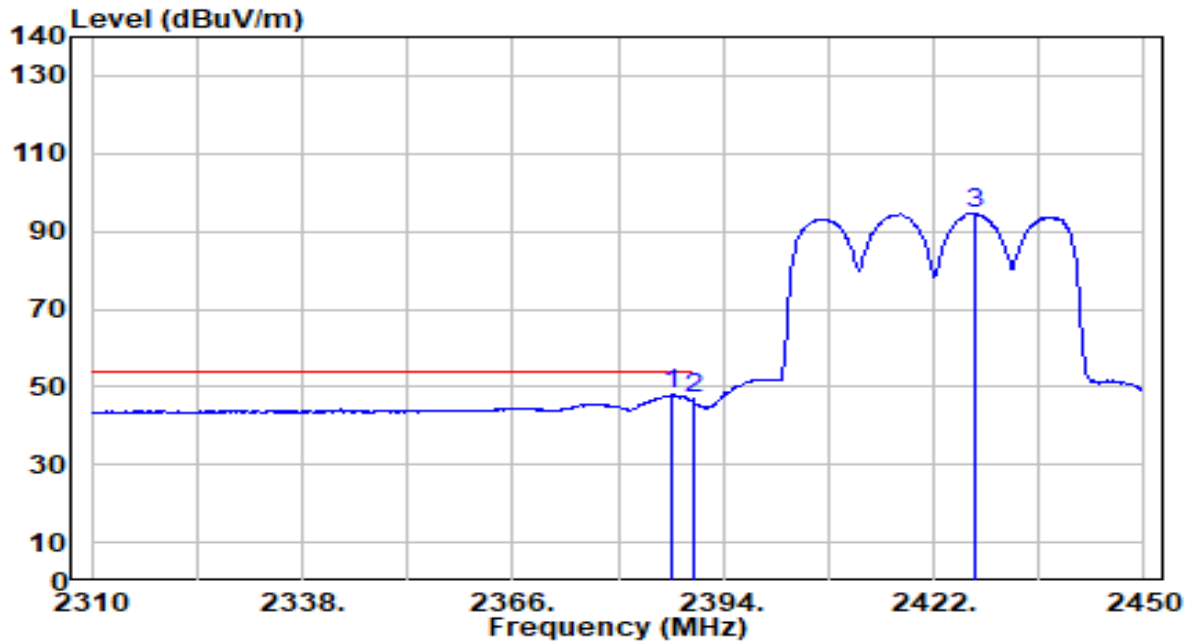


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.140	17.73	30.17	47.90	-6.10	54.00	100	300	Average
2		2390.000	16.58	30.18	46.76	-7.24	54.00	100	300	Average
3		2427.600	64.31	30.24	94.56	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

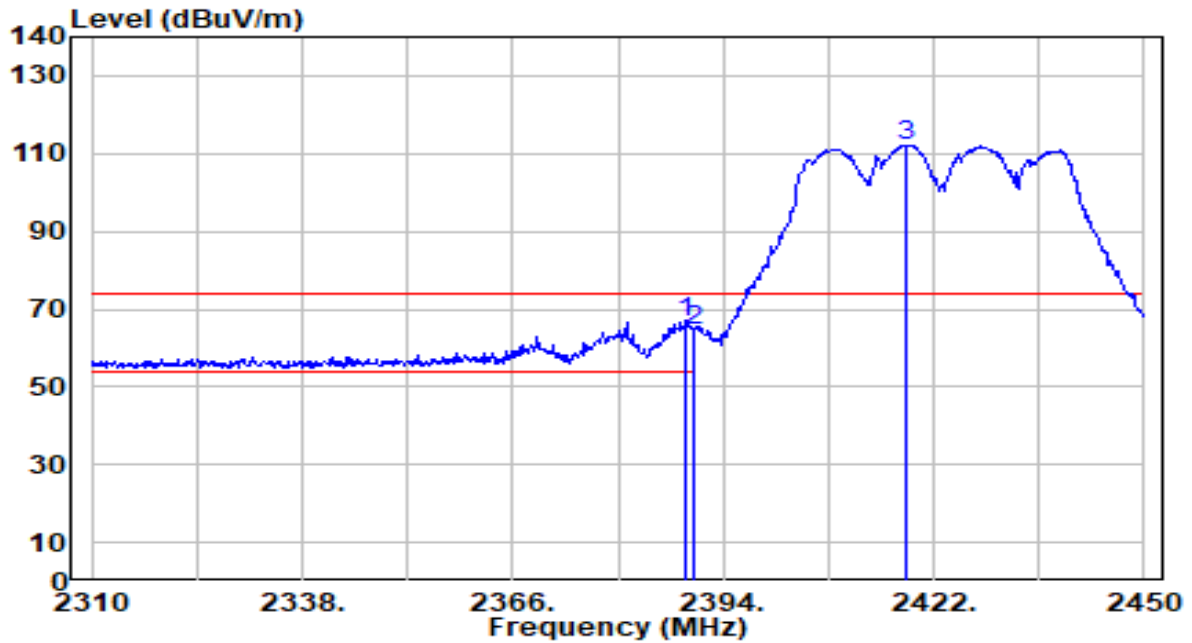


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.960	36.52	30.18	66.70	-7.30	74.00	100	4	Peak
2		2390.000	34.48	30.18	64.66	-9.34	74.00	100	4	Peak
3		2418.220	81.94	30.23	112.17	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

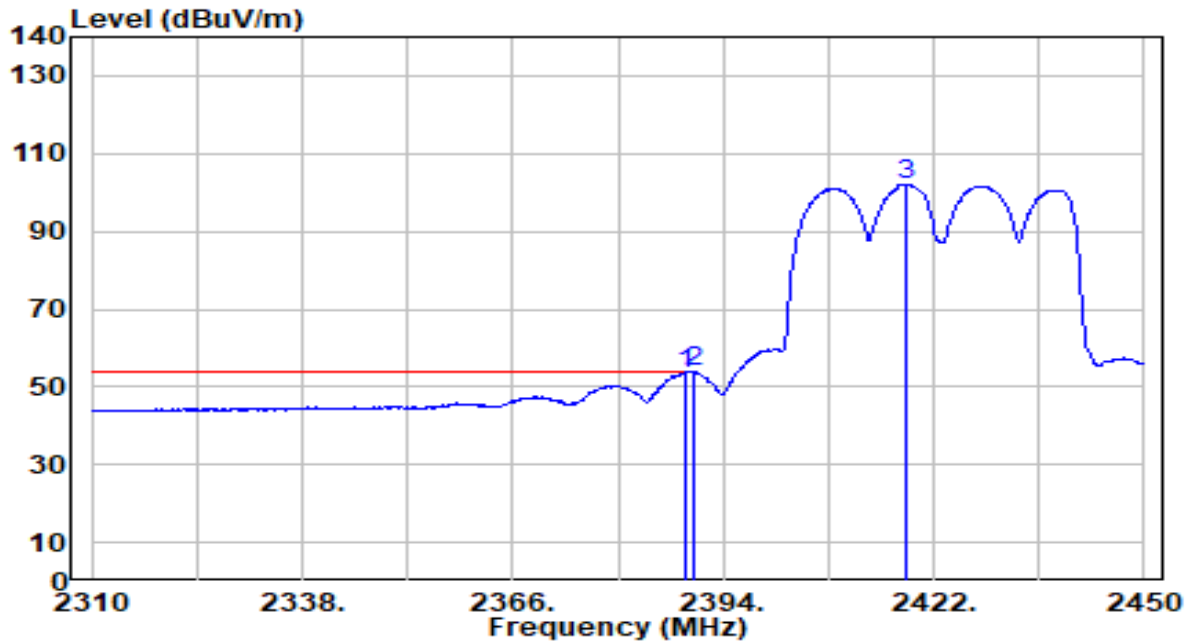


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	23.37	30.18	53.55	-0.45	54.00	100	4	Average
2	* 2390.000	23.61	30.18	53.79	-0.21	54.00	100	4	Average
3	2418.360	71.80	30.23	102.04	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

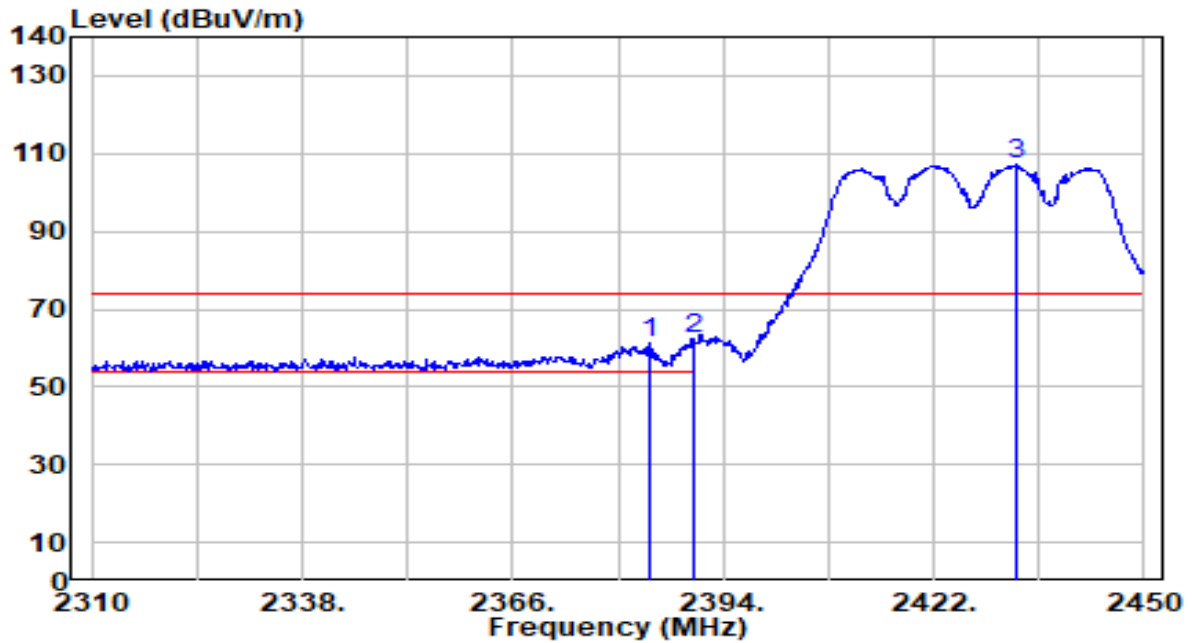


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.060	31.28	30.16	61.44	-12.56	74.00	100	300	Peak
2	* 2390.000	32.36	30.18	62.54	-11.46	74.00	100	300	Peak
3	2433.060	77.13	30.25	107.38	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

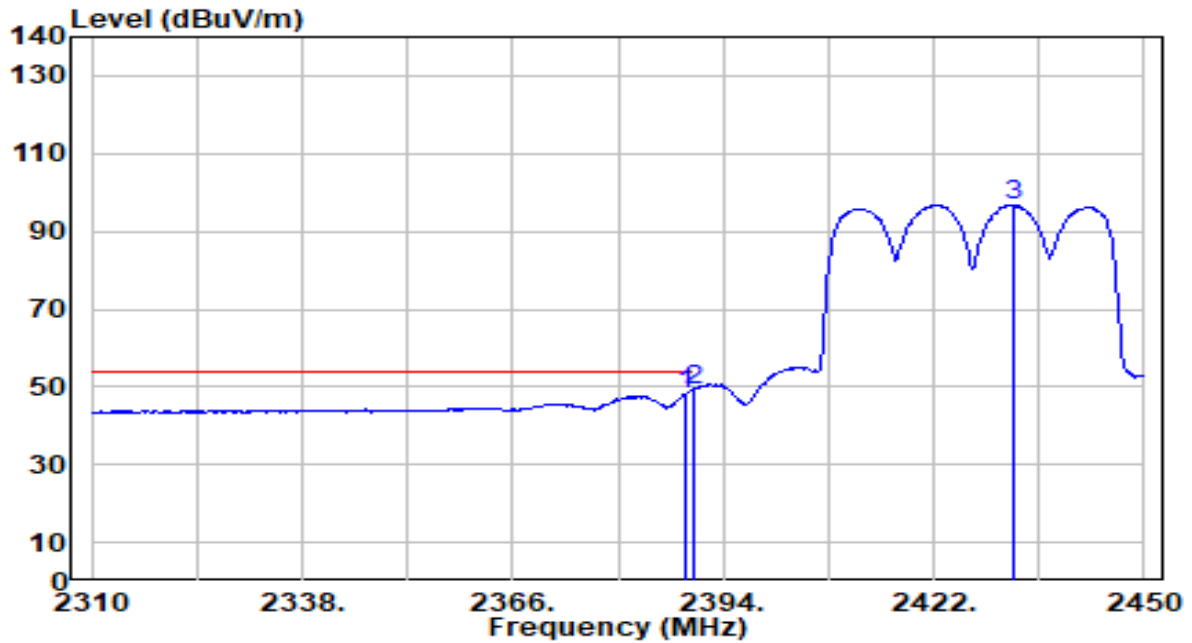


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	17.97	30.18	48.15	-5.85	54.00	100	300	Average
2	* 2390.000	19.00	30.18	49.18	-4.82	54.00	100	300	Average
3	2432.640	66.40	30.25	96.65	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

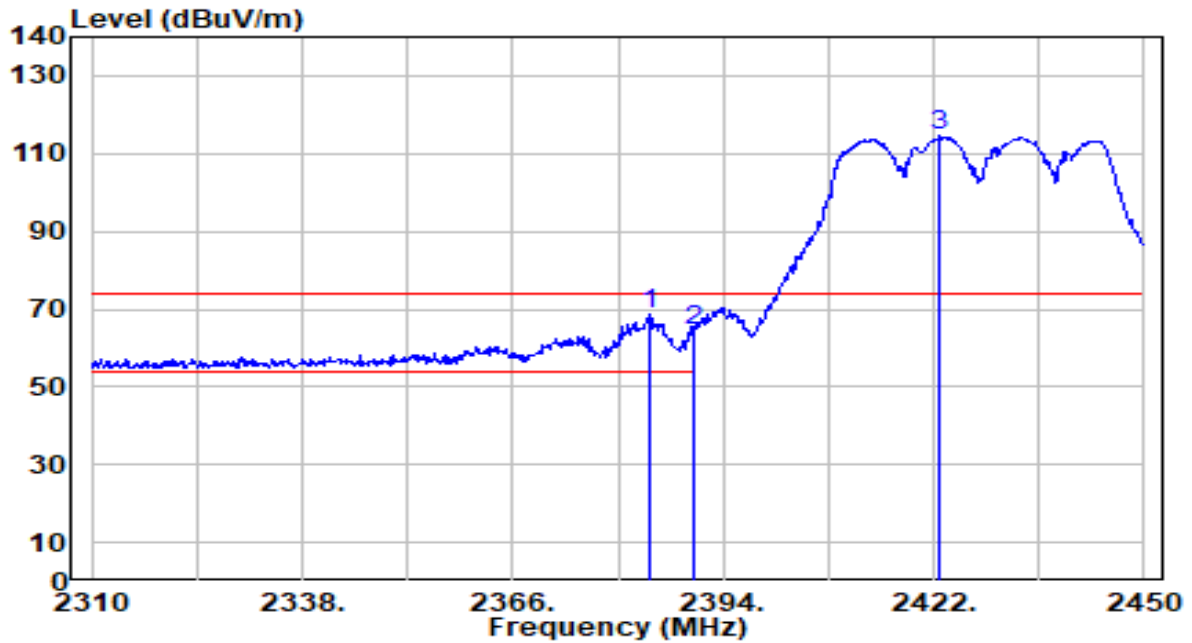


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.340	38.42	30.16	68.58	-5.42	74.00	100	4	Peak
2	2390.000	34.39	30.18	64.57	-9.43	74.00	100	4	Peak
3	2422.840	84.17	30.24	114.40	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

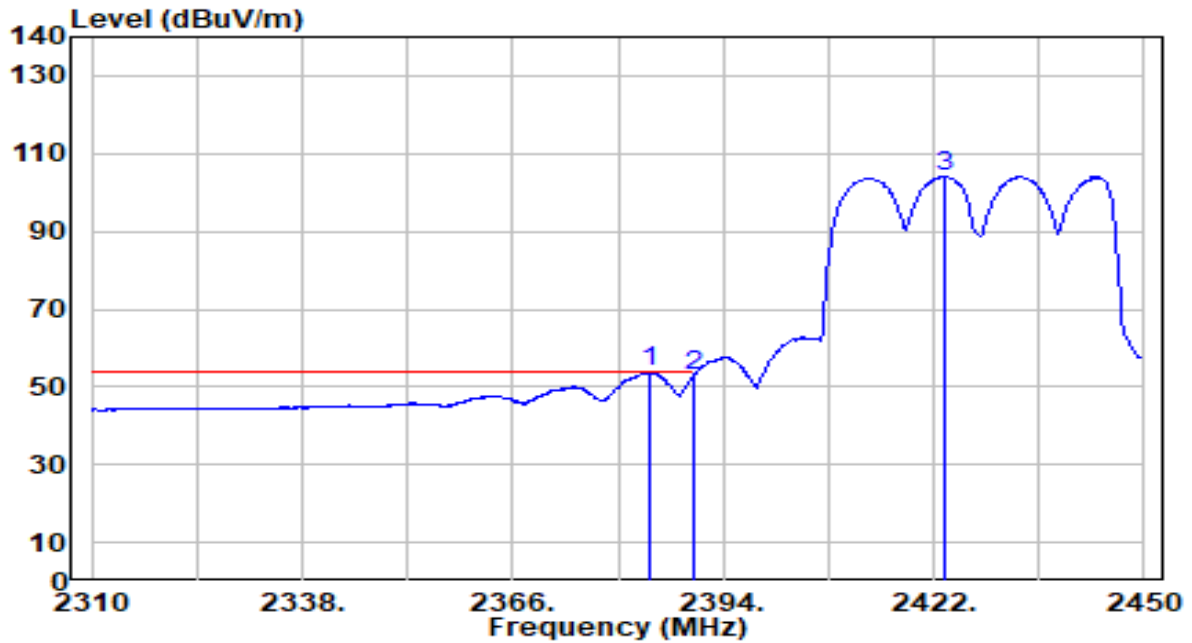


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2384.060	23.62	30.16	53.78	-0.22	54.00	100	4	Average
2		2390.000	22.59	30.18	52.77	-1.23	54.00	100	4	Average
3		2423.540	74.05	30.24	104.29	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

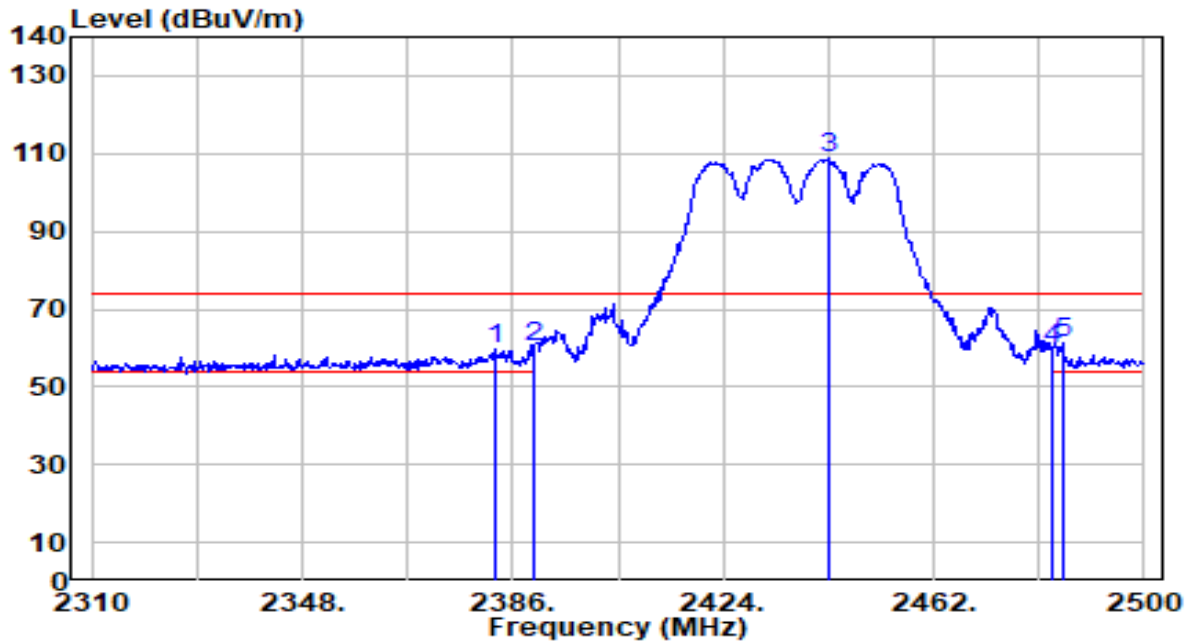


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.770	29.41	30.16	59.57	-14.43	74.00	100	300	Peak
2	2390.000	30.07	30.18	60.25	-13.75	74.00	100	300	Peak
3	2443.000	78.43	30.26	108.69	N/A	N/A	100	300	Peak
4	2483.500	29.57	30.32	59.88	-14.12	74.00	100	300	Peak
5	* 2485.180	30.88	30.32	61.20	-12.80	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

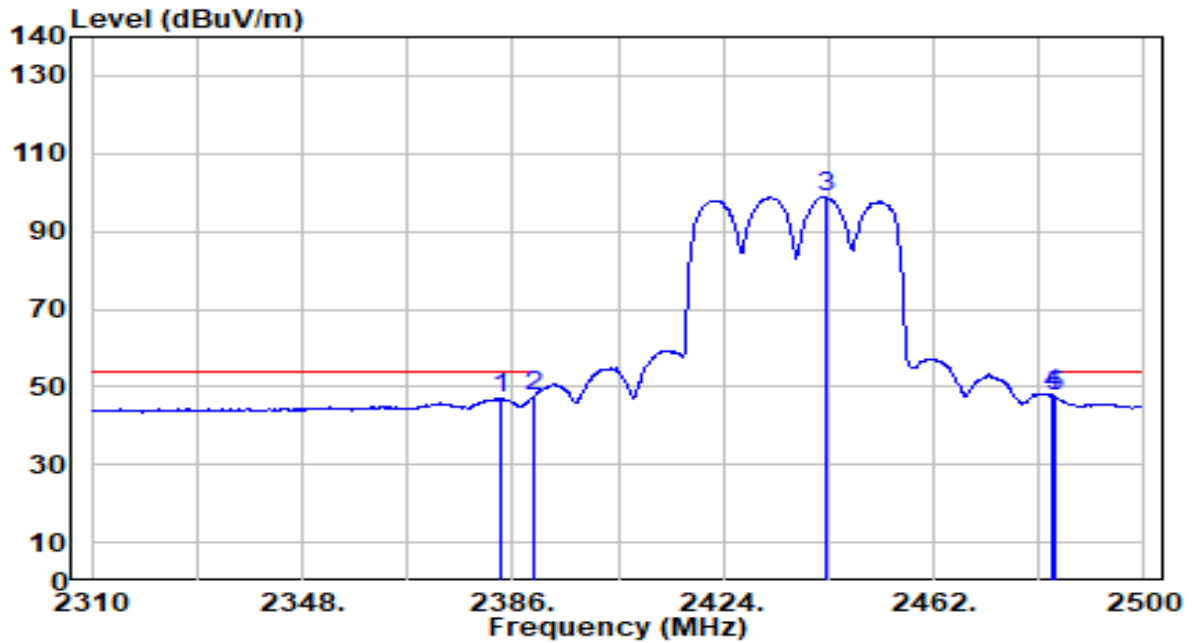


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.720	16.77	30.16	46.93	-7.07	54.00	100	300	Average
2	2390.000	17.60	30.18	47.78	-6.22	54.00	100	300	Average
3	2442.620	68.48	30.26	98.74	N/A	N/A	100	300	Average
4	* 2483.500	17.51	30.32	47.83	-6.17	54.00	100	300	Average
5	2484.040	17.00	30.32	47.32	-6.68	54.00	100	300	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

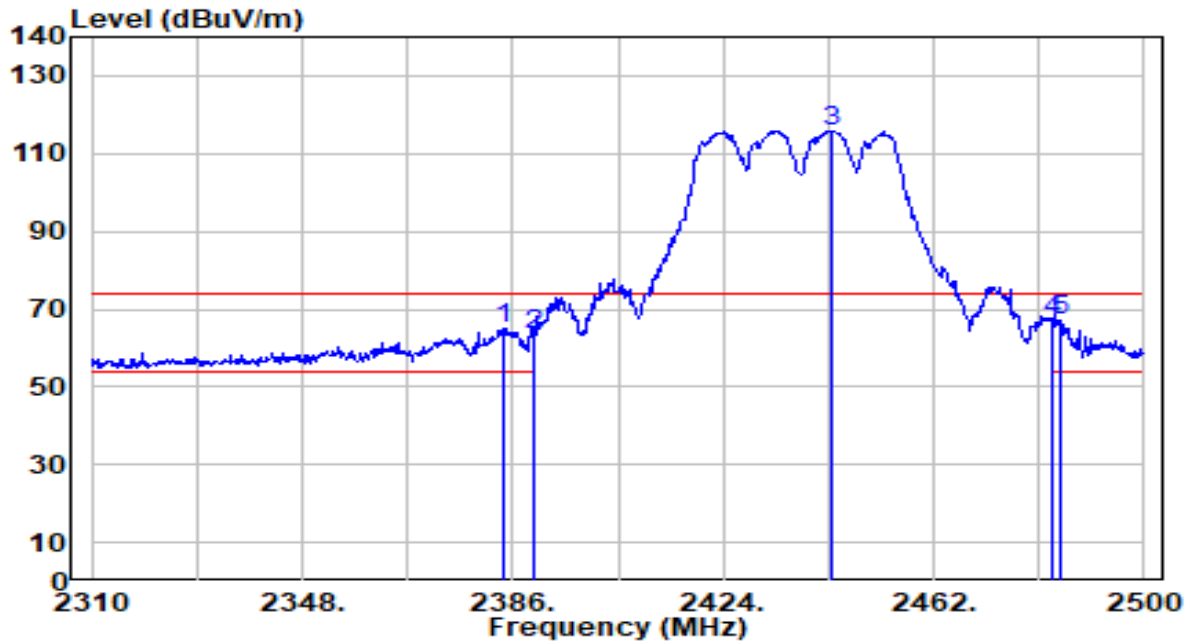


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	35.05	30.16	65.22	-8.78	74.00	100	4	Peak
2	2390.000	33.39	30.18	63.57	-10.43	74.00	100	4	Peak
3	2443.760	85.59	30.27	115.85	N/A	N/A	100	4	Peak
4	2483.500	36.57	30.32	66.89	-7.11	74.00	100	4	Peak
5	* 2484.990	36.67	30.32	66.99	-7.01	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

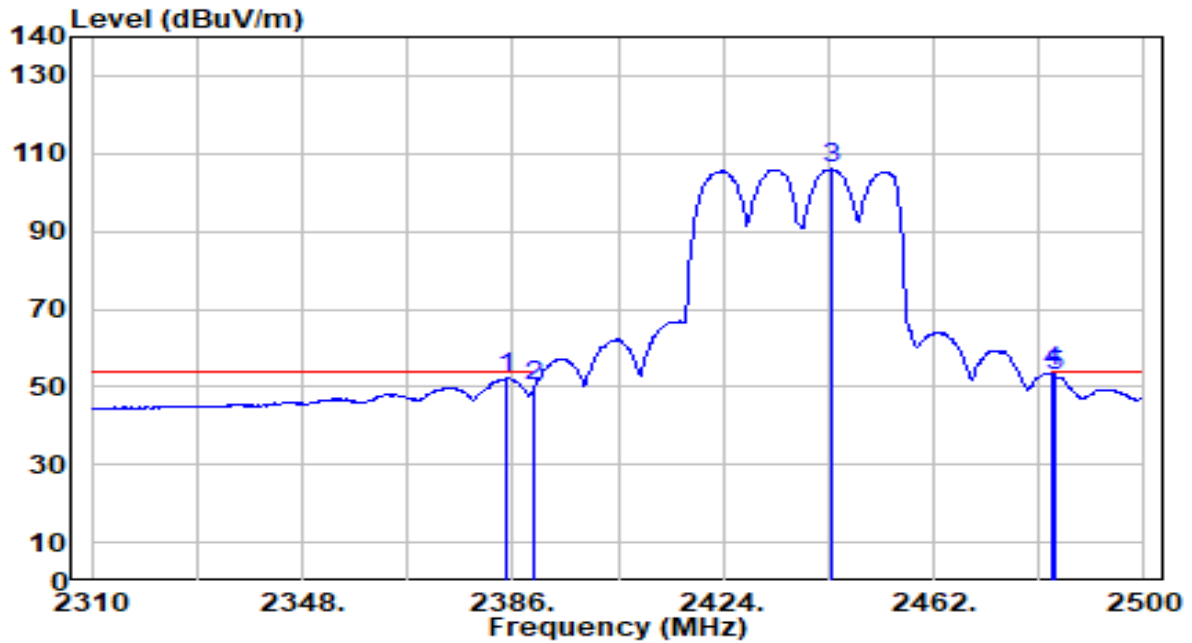


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.050	22.10	30.17	52.26	-1.74	54.00	100	4	Average
2	2390.000	19.91	30.18	50.09	-3.91	54.00	100	4	Average
3	2443.570	75.78	30.27	106.05	N/A	N/A	100	4	Average
4	* 2483.500	23.41	30.32	53.73	-0.27	54.00	100	4	Average
5	2484.040	22.40	30.32	52.72	-1.28	54.00	100	4	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

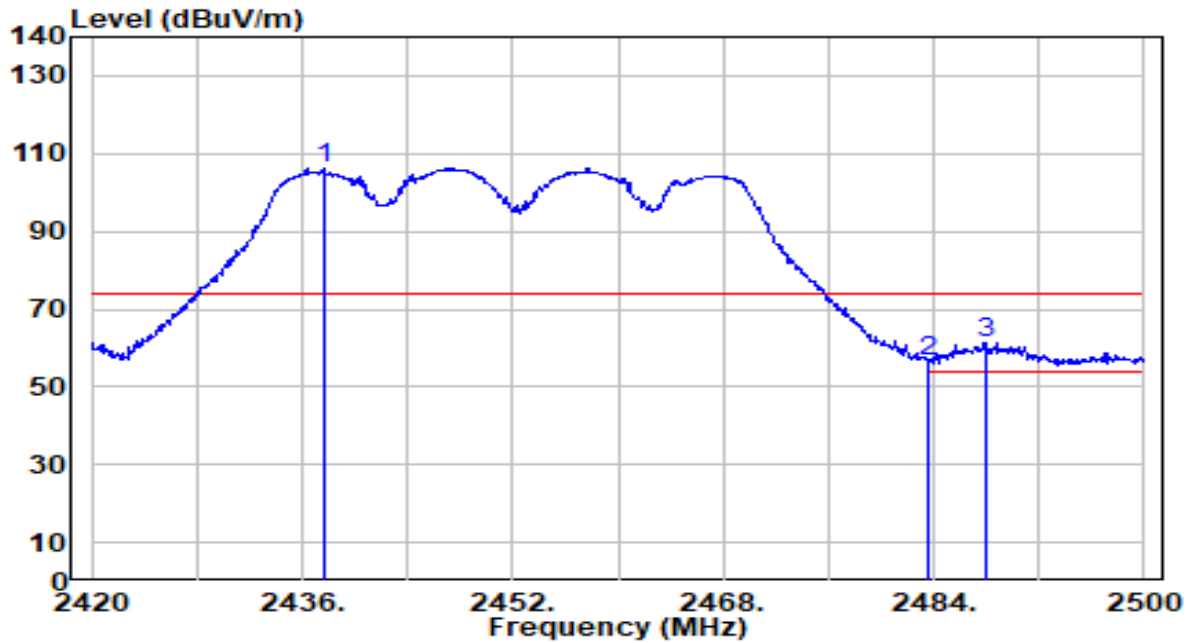


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2437.680	75.93	30.26	106.18	N/A	N/A	100	300	Peak
2	2483.500	26.16	30.32	56.48	-17.52	74.00	100	300	Peak
3	* 2487.920	30.76	30.32	61.08	-12.92	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

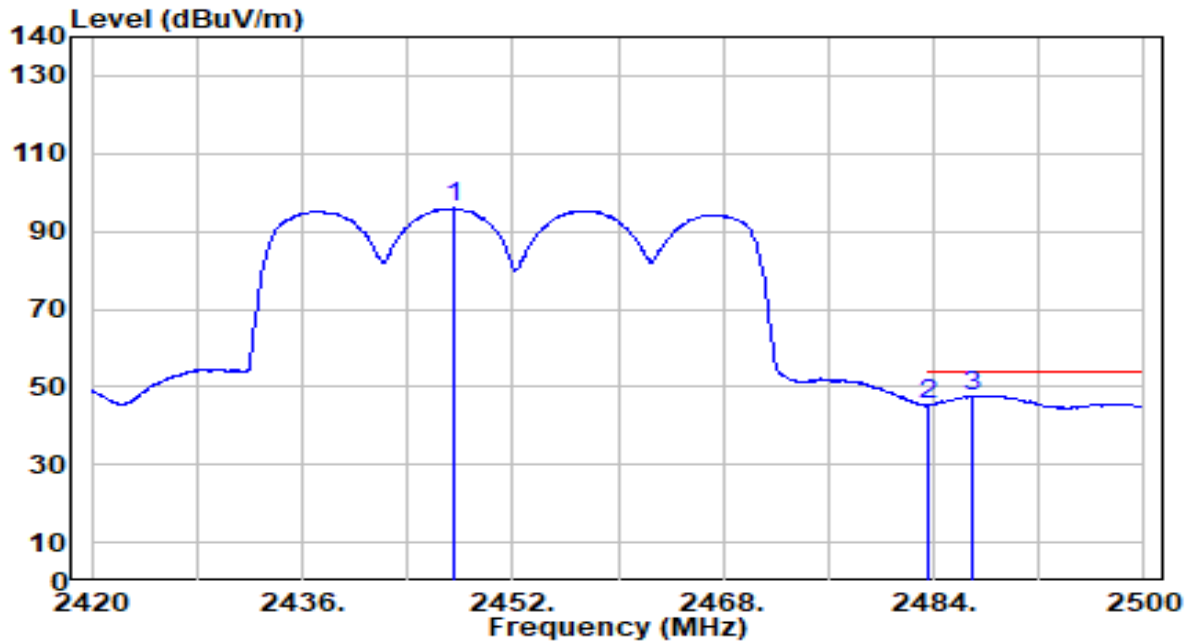


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.440	65.64	30.27	95.91	N/A	N/A	100	300	Average
2	2483.500	15.07	30.32	45.39	-8.61	54.00	100	300	Average
3	* 2486.960	17.42	30.32	47.74	-6.26	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

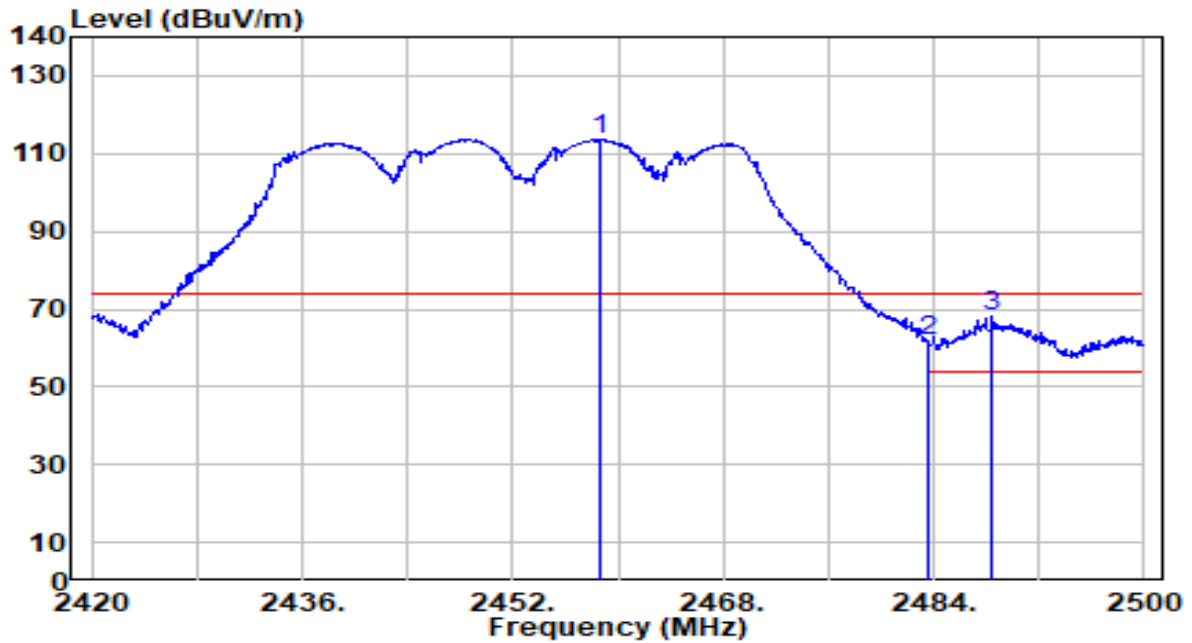


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.720	83.26	30.29	113.54	N/A	N/A	100	4	Peak
2	2483.500	31.62	30.32	61.94	-12.06	74.00	100	4	Peak
3	* 2488.480	37.70	30.32	68.02	-5.98	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

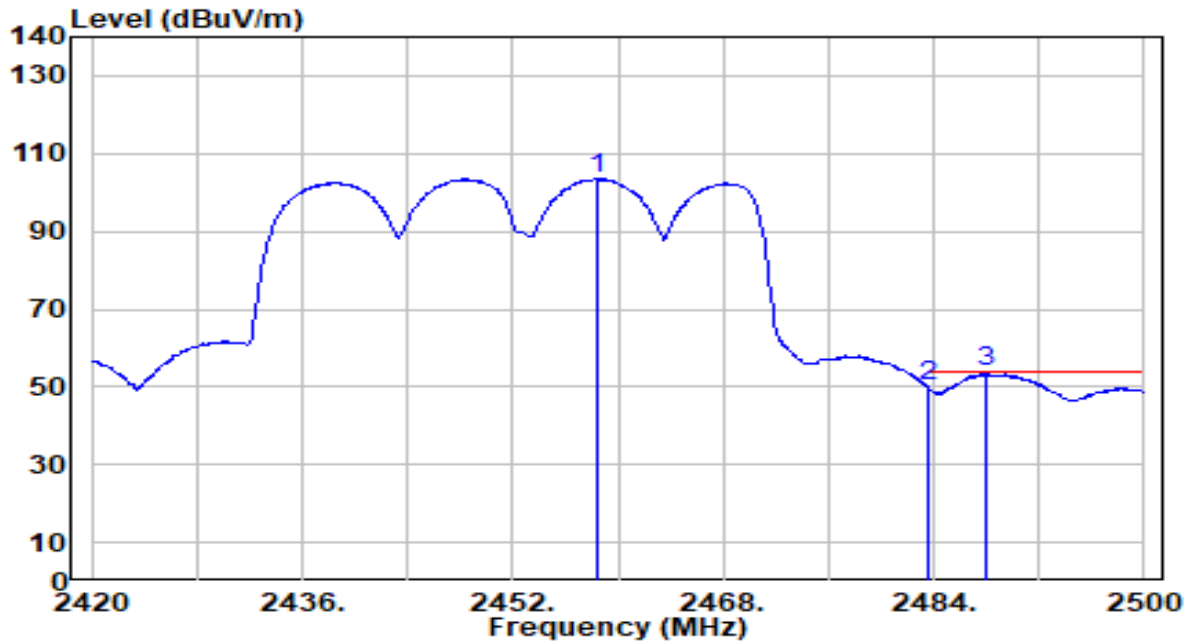


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.480	73.18	30.29	103.47	N/A	N/A	100	4	Average
2	2483.500	19.85	30.32	50.17	-3.83	54.00	100	4	Average
3	* 2487.920	23.40	30.32	53.73	-0.27	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

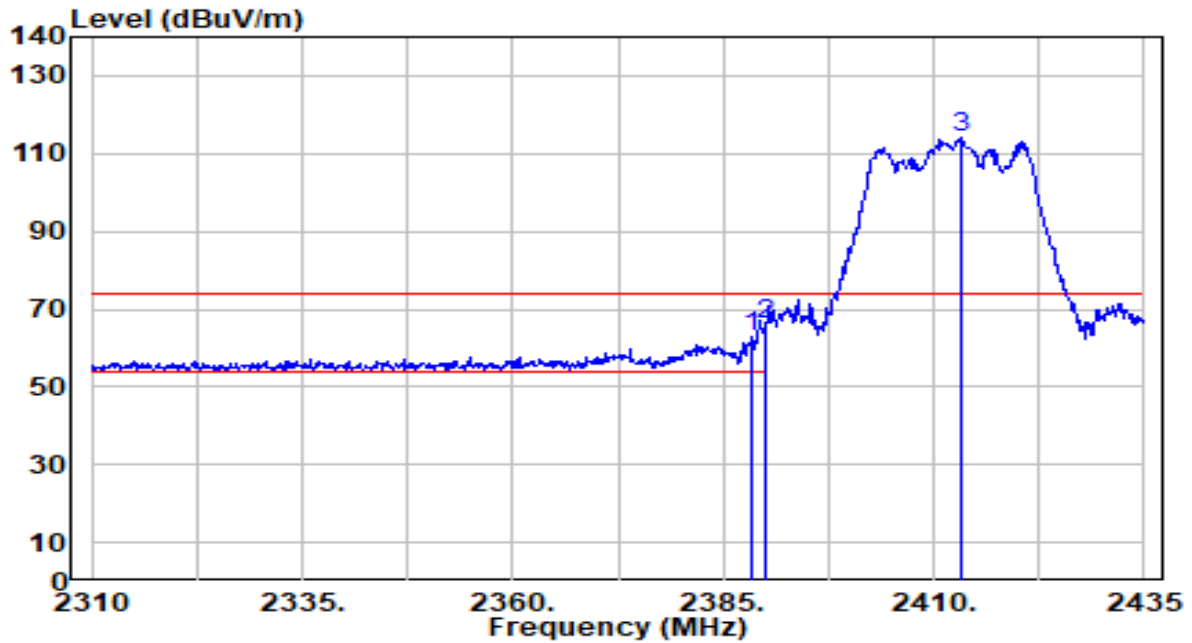


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.375	32.61	30.18	62.78	-11.22	74.00	100	300	Peak
2	* 2390.000	35.72	30.18	65.90	-8.10	74.00	100	300	Peak
3	2413.250	83.83	30.23	114.06	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

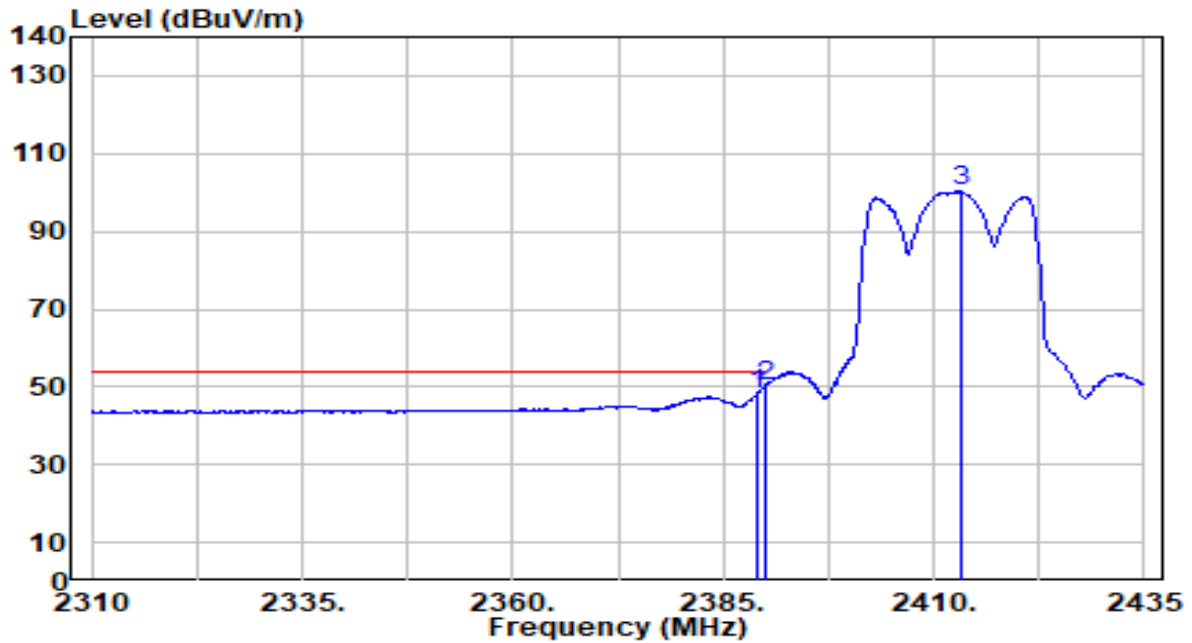


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	17.89	30.18	48.07	-5.93	54.00	100	300	Average
2	* 2390.000	19.96	30.18	50.14	-3.86	54.00	100	300	Average
3	2413.125	70.03	30.23	100.26	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

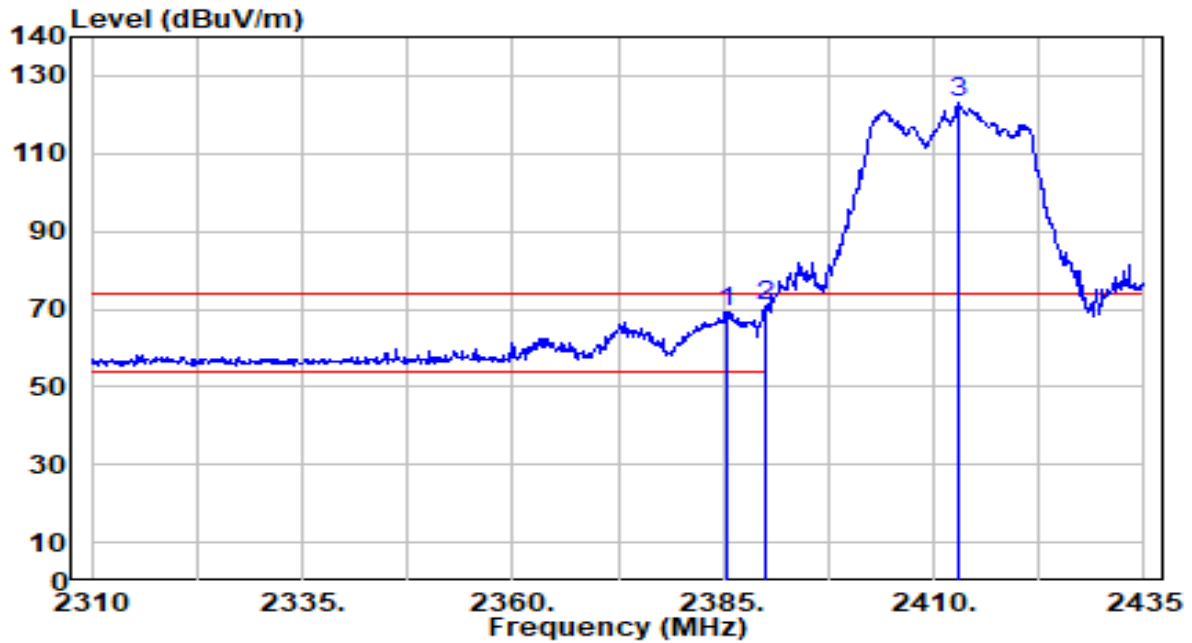


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.375	39.00	30.17	69.17	-4.83	74.00	100	4	Peak
2	* 2390.000	40.60	30.18	70.78	-3.22	74.00	100	4	Peak
3	2412.875	92.73	30.22	122.95	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

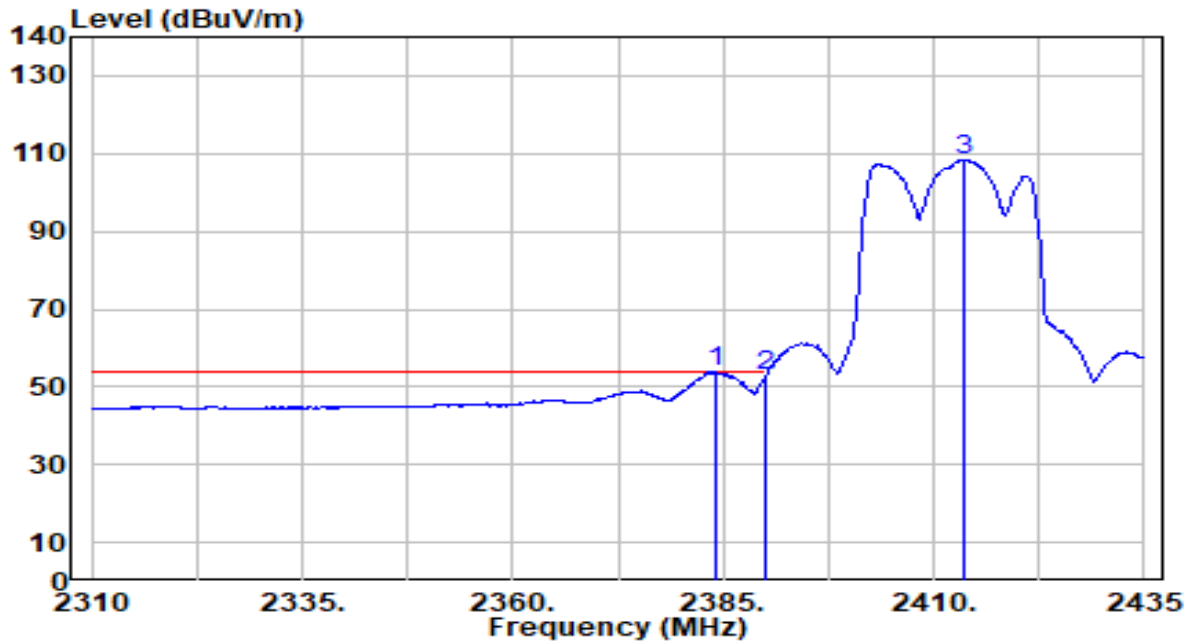


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.000	23.61	30.16	53.77	-0.23	54.00	100	4	Average
2	2390.000	22.80	30.18	52.98	-1.02	54.00	100	4	Average
3	2413.500	78.25	30.23	108.48	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

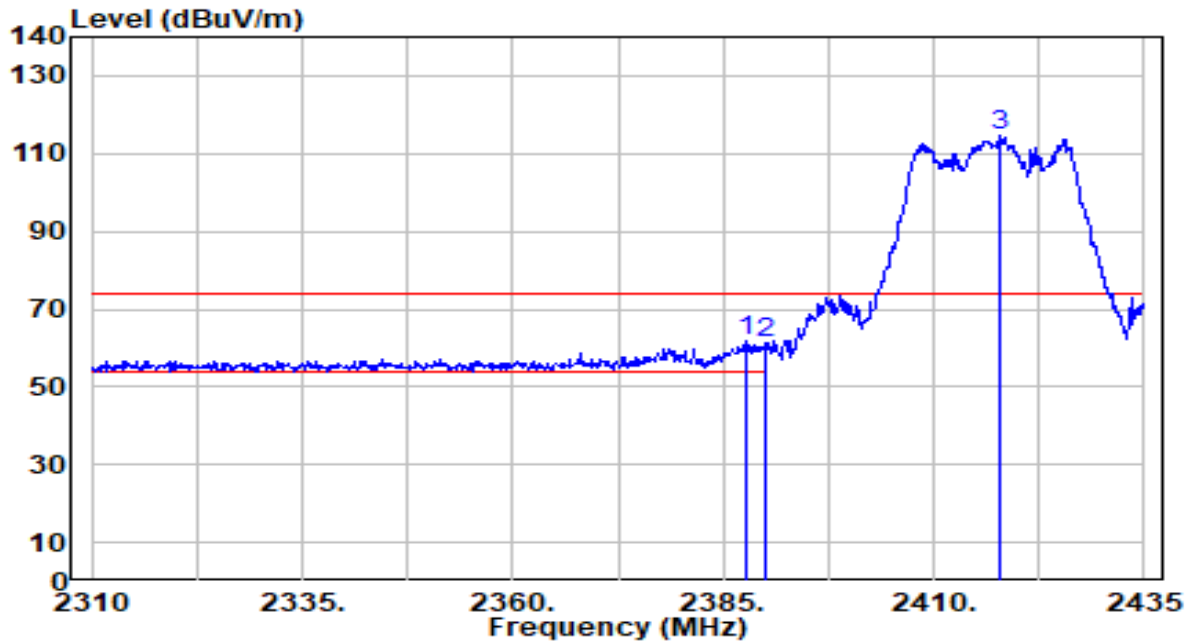


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.875	31.85	30.17	62.02	-11.98	74.00	100	300	Peak
2		2390.000	31.31	30.18	61.49	-12.51	74.00	100	300	Peak
3		2418.000	84.25	30.23	114.48	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

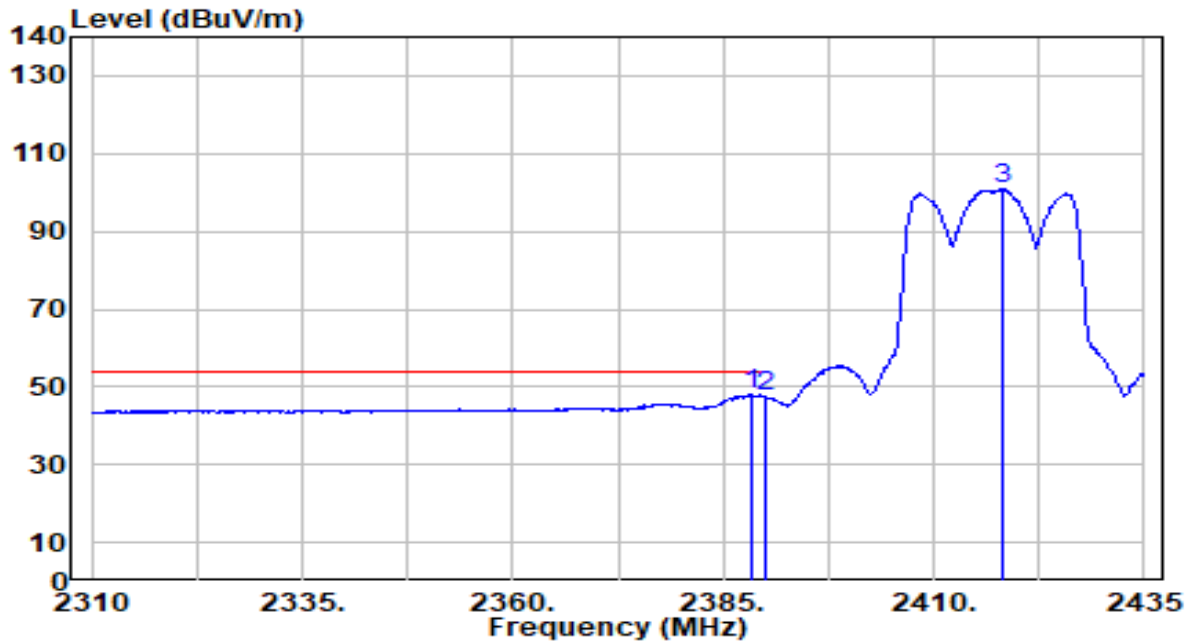


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.500	17.68	30.18	47.85	-6.15	54.00	100	300	Average
2		2390.000	17.27	30.18	47.45	-6.55	54.00	100	300	Average
3		2418.250	70.54	30.23	100.77	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

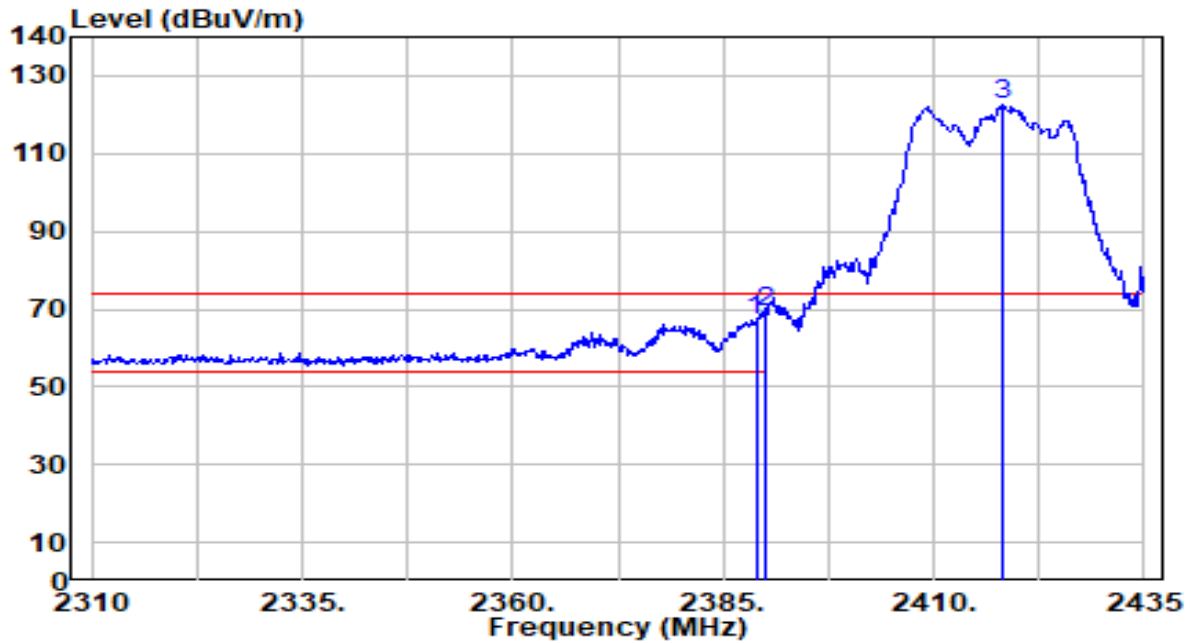


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	36.89	30.18	67.07	-6.93	74.00	100	4	Peak
2	* 2390.000	38.96	30.18	69.14	-4.86	74.00	100	4	Peak
3	2418.250	92.25	30.23	122.48	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

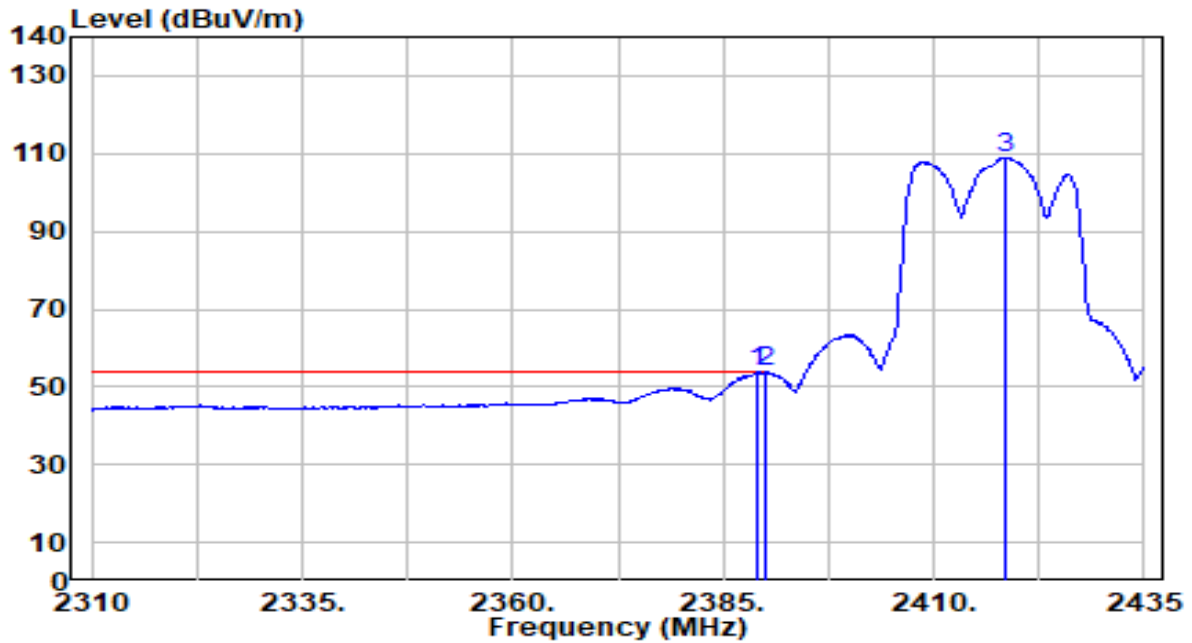


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.125	23.67	30.18	53.85	-0.15	54.00	100	4	Average
2		2390.000	23.46	30.18	53.64	-0.36	54.00	100	4	Average
3		2418.625	78.63	30.23	108.86	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

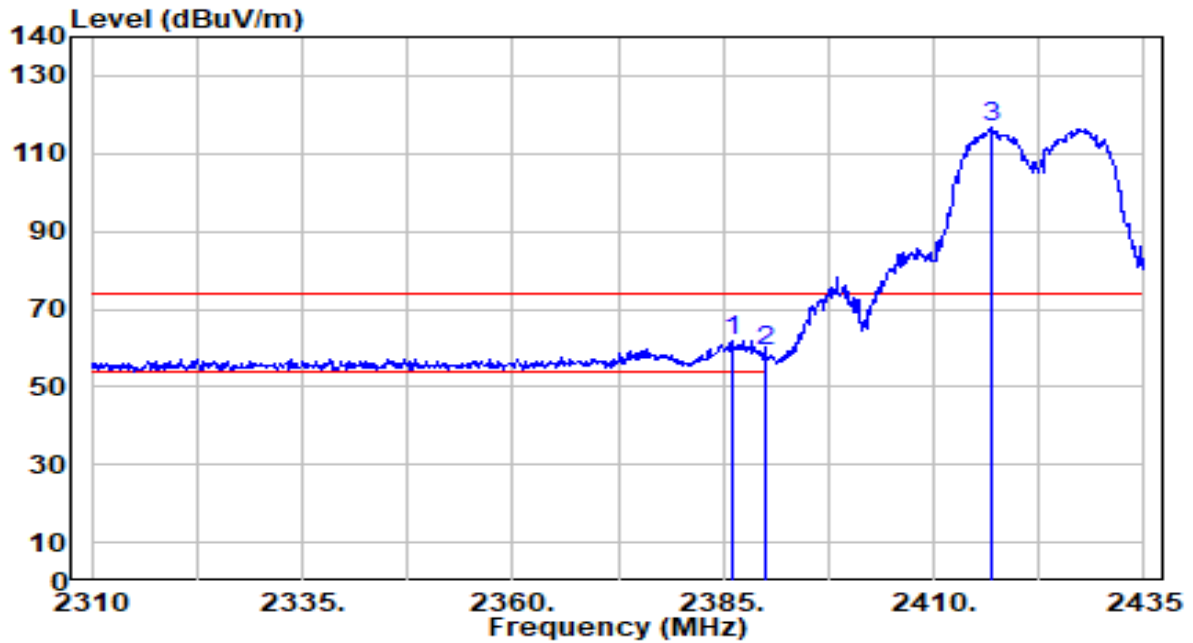


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	31.86	30.17	62.03	-11.97	74.00	100	300	Peak
2		29.09	30.18	59.27	-14.73	74.00	100	300	Peak
3		86.45	30.23	116.68	N/A	N/A	100	300	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

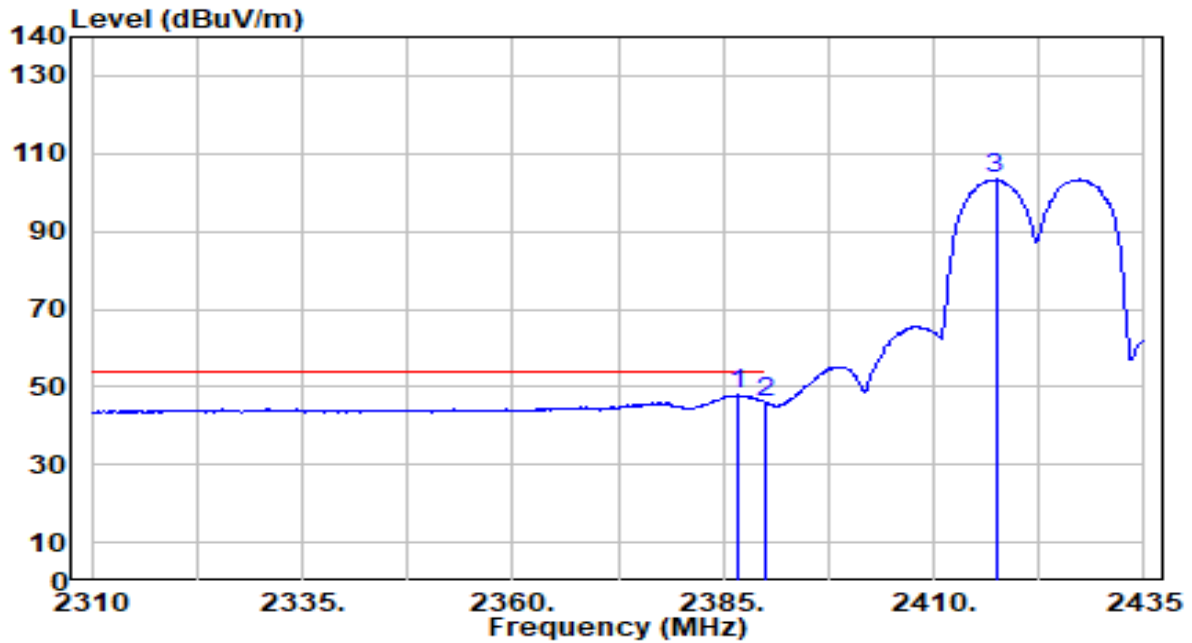


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.750	17.68	30.17	47.85	-6.15	54.00	100	300	Average
2		2390.000	15.85	30.18	46.03	-7.97	54.00	100	300	Average
3		2417.375	73.17	30.23	103.40	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

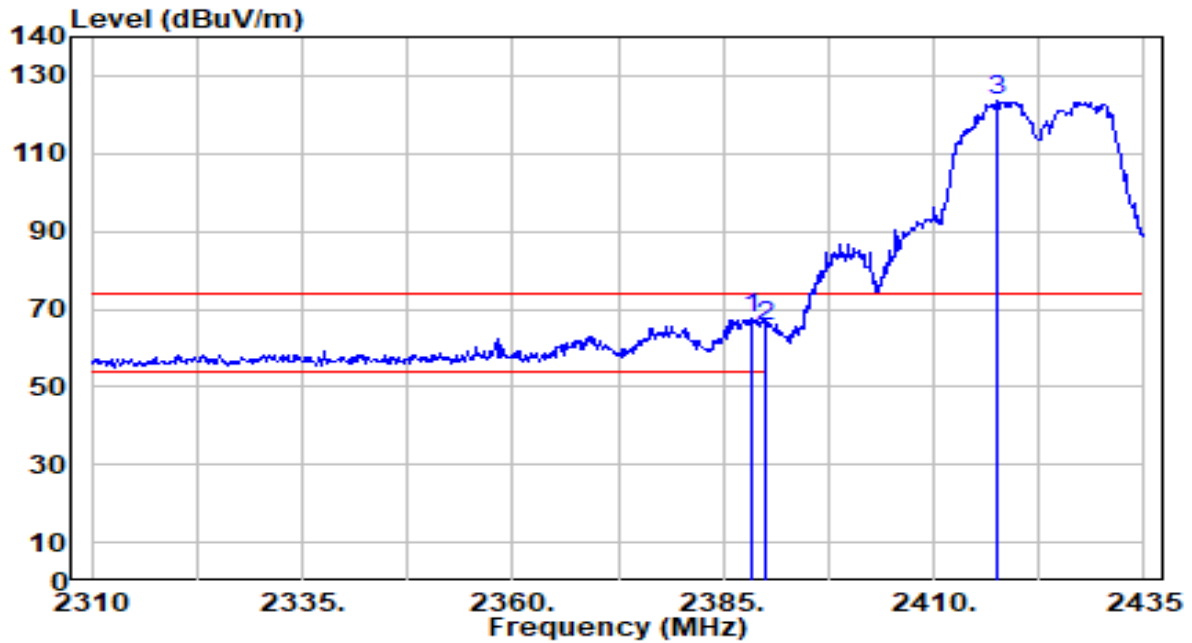


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.250	37.43	30.17	67.61	-6.39	74.00	100	4	Peak
2		2390.000	35.20	30.18	65.38	-8.62	74.00	100	4	Peak
3		2417.625	93.23	30.23	123.46	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

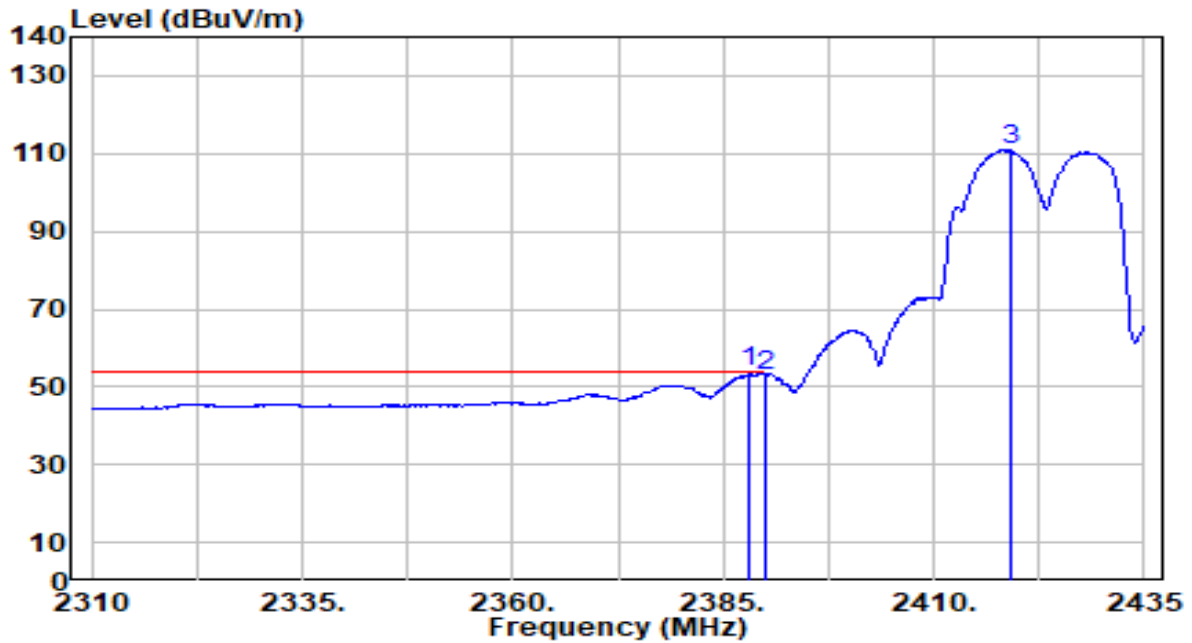


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.54	30.17	53.72	-0.28	54.00	100	4	Average
2		22.64	30.18	52.82	-1.18	54.00	100	4	Average
3		80.60	30.23	110.83	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

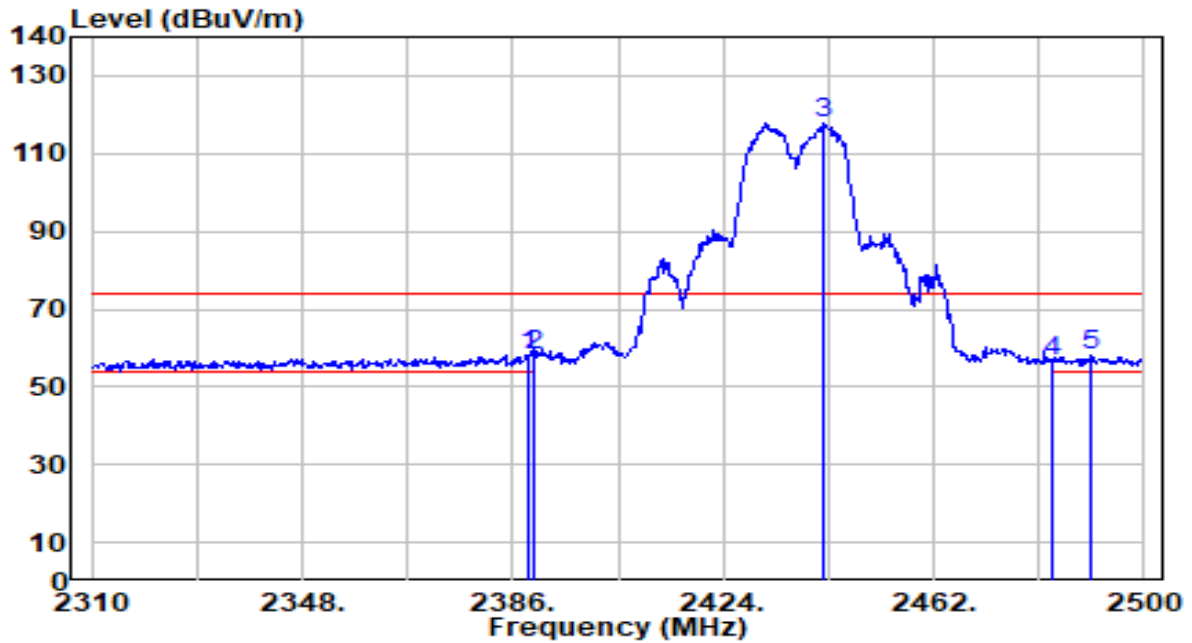


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.660	28.11	30.18	58.29	-15.71	74.00	100	300	Peak
2		2390.000	28.03	30.18	58.21	-15.79	74.00	100	300	Peak
3		2442.240	87.43	30.26	117.70	N/A	N/A	100	300	Peak
4		2483.500	26.02	30.32	56.34	-17.66	74.00	100	300	Peak
5		2490.500	27.56	30.33	57.89	-16.11	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

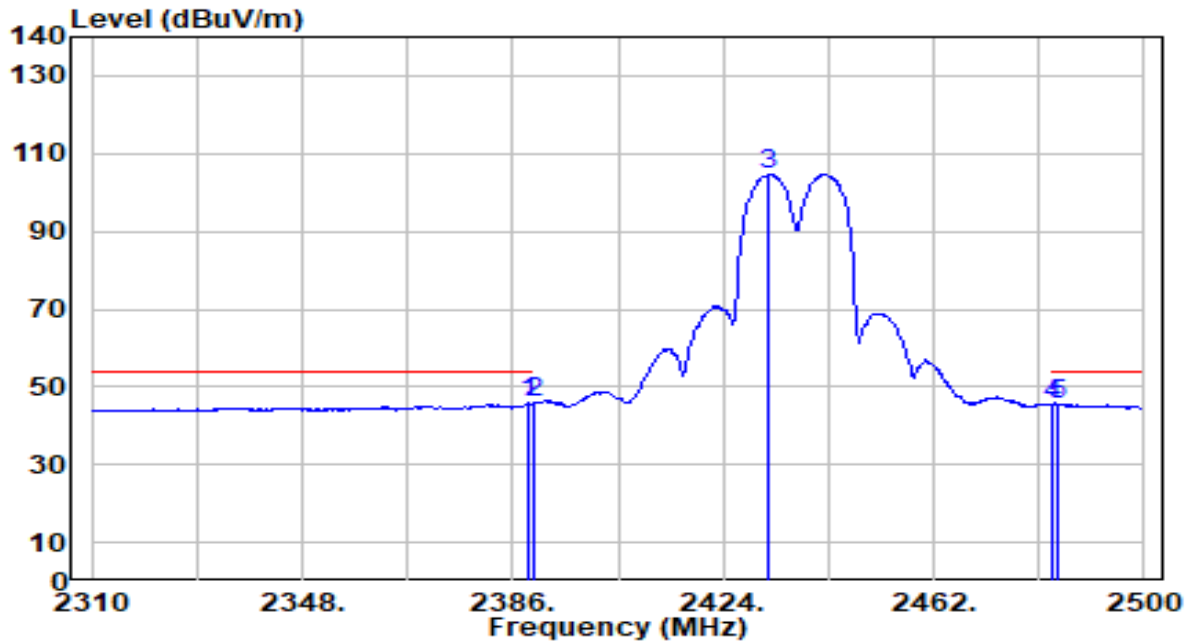


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	15.59	30.18	45.76	-8.24	54.00	100	300	Average
2	* 2390.000	15.77	30.18	45.95	-8.05	54.00	100	300	Average
3	2432.360	74.33	30.25	104.58	N/A	N/A	100	300	Average
4	2483.500	15.08	30.32	45.40	-8.60	54.00	100	300	Average
5	2484.230	15.27	30.32	45.59	-8.41	54.00	100	300	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

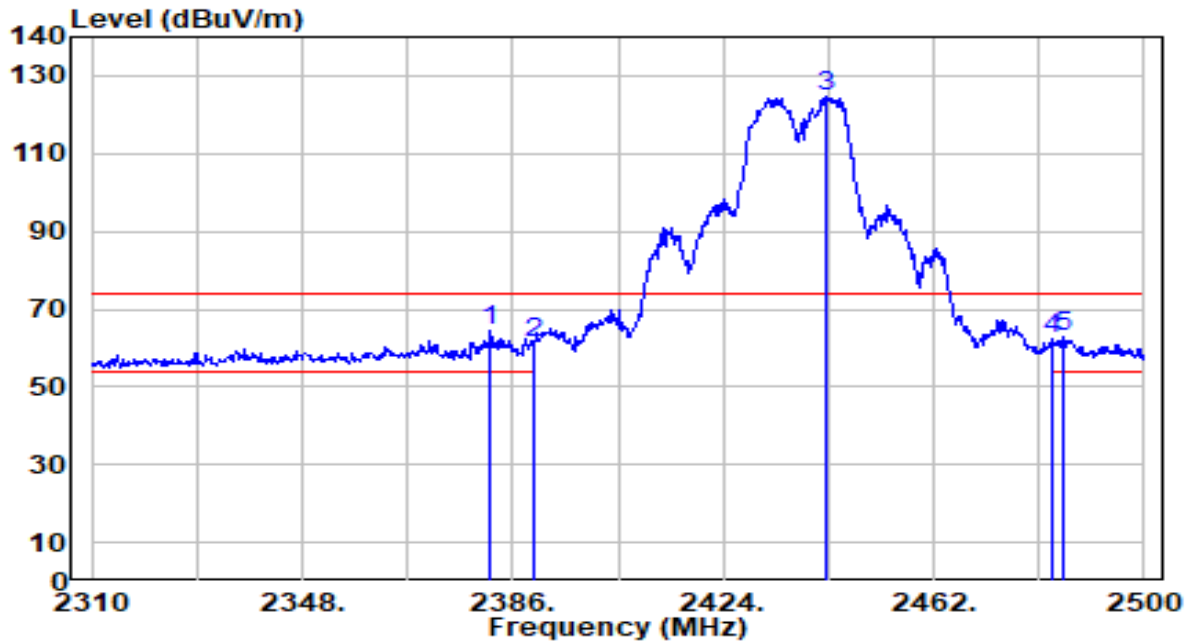


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2382.010	34.22	30.16	64.38	-9.62	74.00	100	4	Peak
2	2390.000	30.91	30.18	61.09	-12.91	74.00	100	4	Peak
3	2442.430	94.30	30.26	124.56	N/A	N/A	100	4	Peak
4	2483.500	31.81	30.32	62.13	-11.87	74.00	100	4	Peak
5	2485.560	32.47	30.32	62.79	-11.21	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

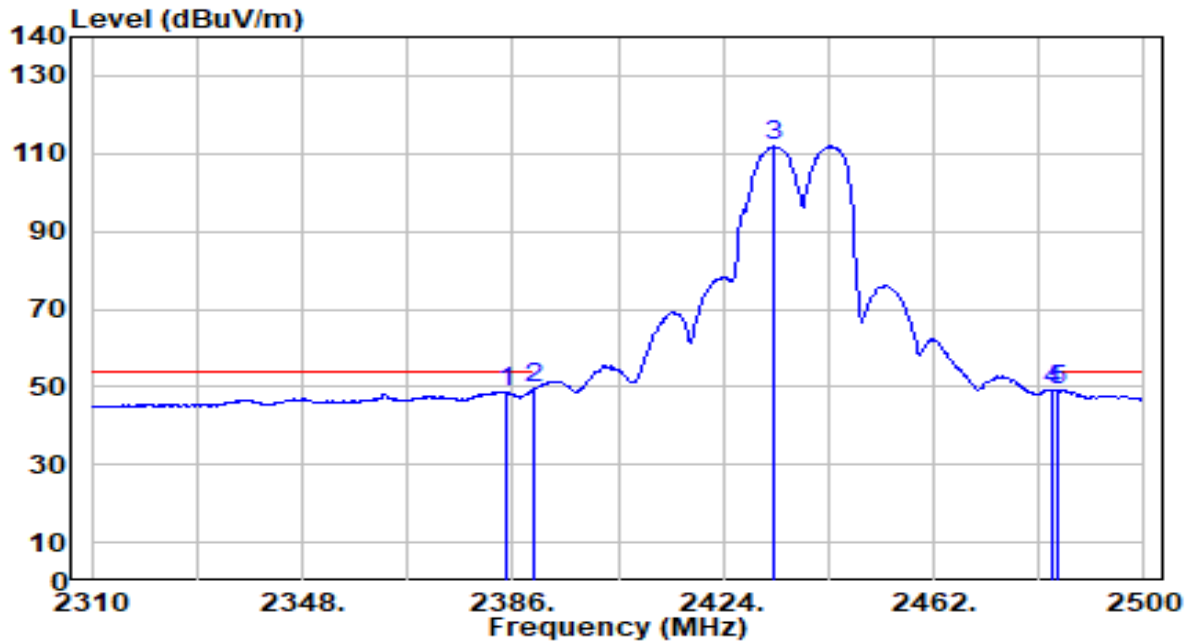


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.860	18.58	30.17	48.74	-5.26	54.00	100	4	Average
2	* 2390.000	19.25	30.18	49.43	-4.57	54.00	100	4	Average
3	2433.120	81.62	30.25	111.88	N/A	N/A	100	4	Average
4	2483.500	18.58	30.32	48.90	-5.10	54.00	100	4	Average
5	2484.230	18.80	30.32	49.12	-4.88	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

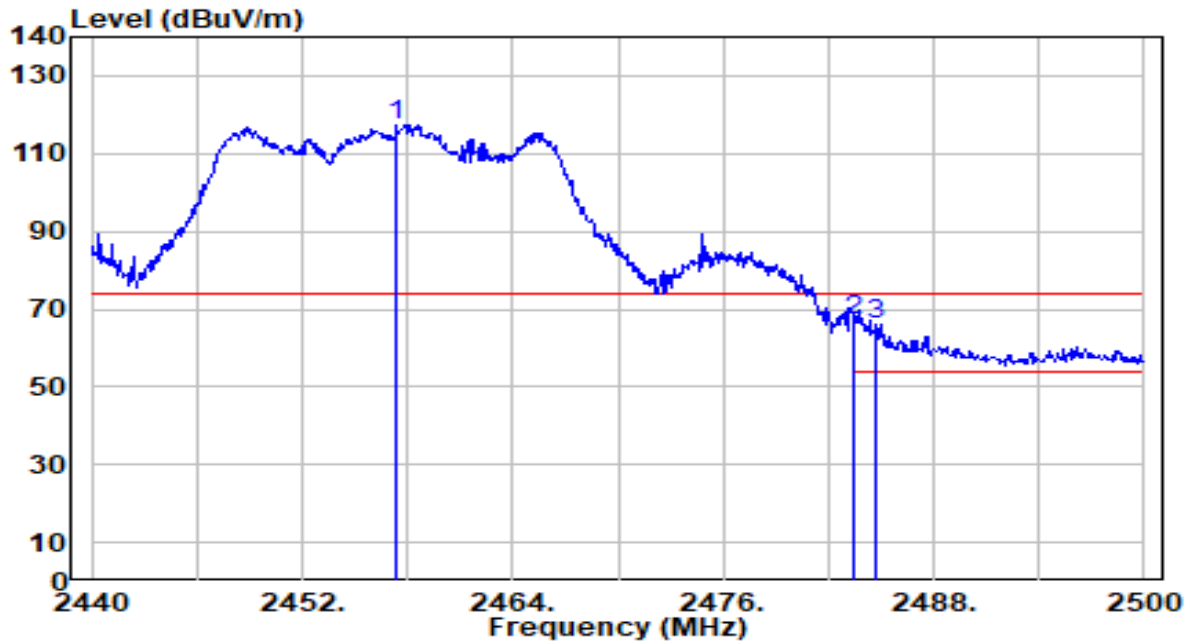


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.340	86.96	30.28	117.24	N/A	N/A	100	300	Peak
2	* 2483.500	36.90	30.32	67.22	-6.78	74.00	100	300	Peak
3	2484.700	35.87	30.32	66.19	-7.81	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

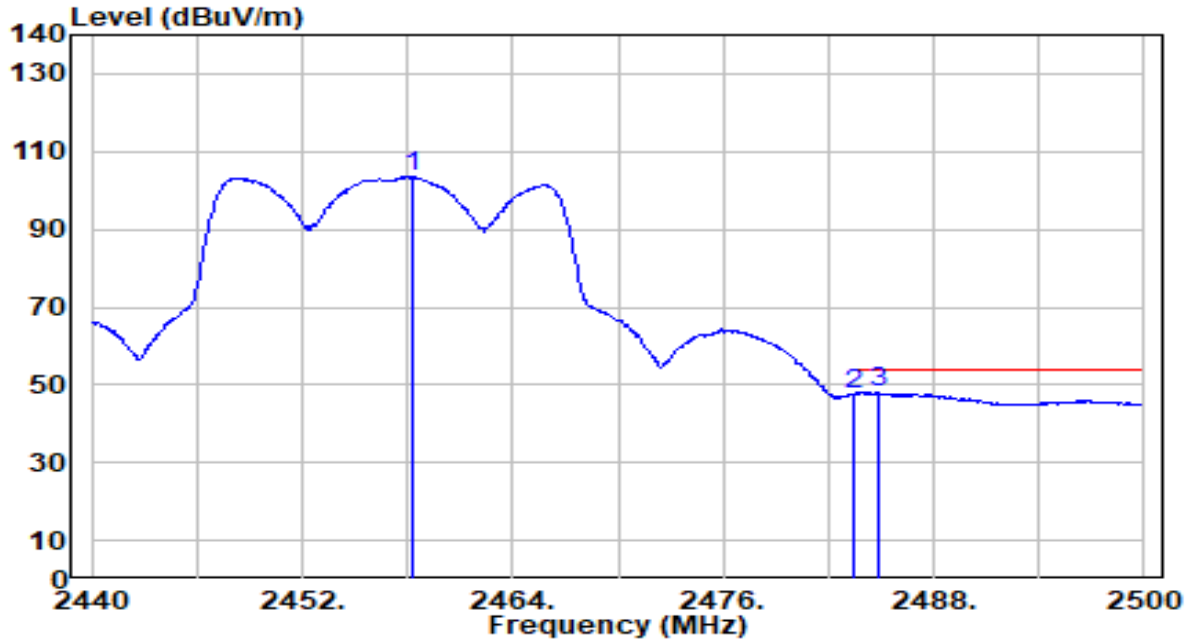


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.300	73.18	30.28	103.46	N/A	N/A	100	300	Average
2	2483.500	17.19	30.32	47.50	-6.50	54.00	100	300	Average
3	* 2484.820	17.55	30.32	47.87	-6.13	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

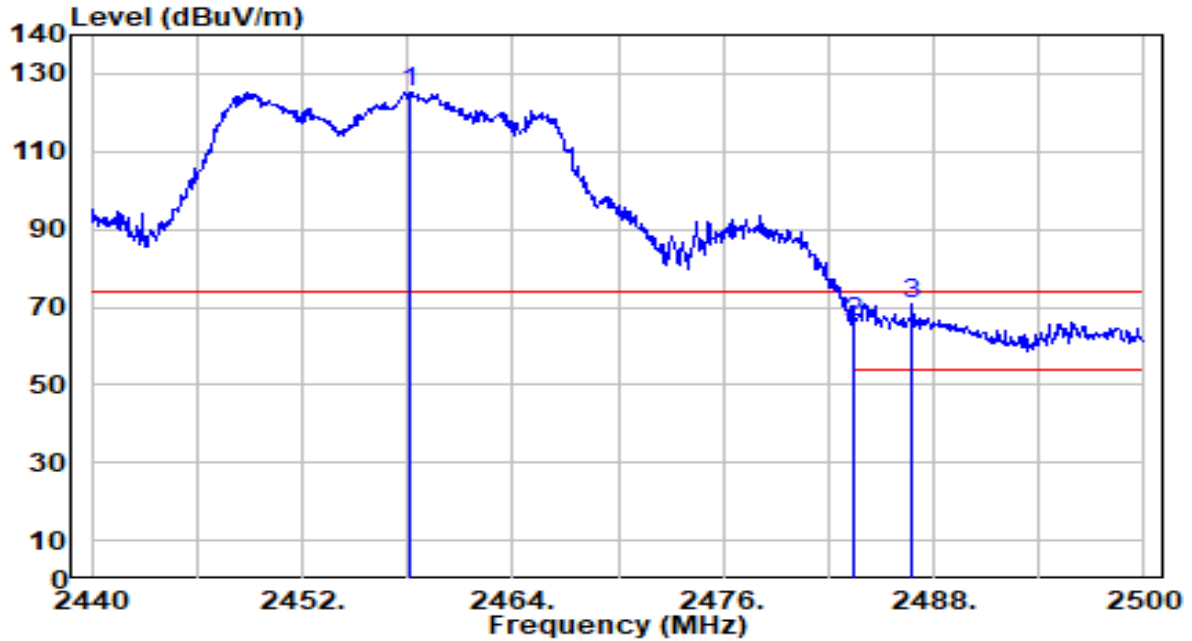


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.120	95.17	30.28	125.46	N/A	N/A	100	4	Peak
2	2483.500	35.87	30.32	66.19	-7.81	74.00	100	4	Peak
3	* 2486.800	40.55	30.32	70.87	-3.13	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

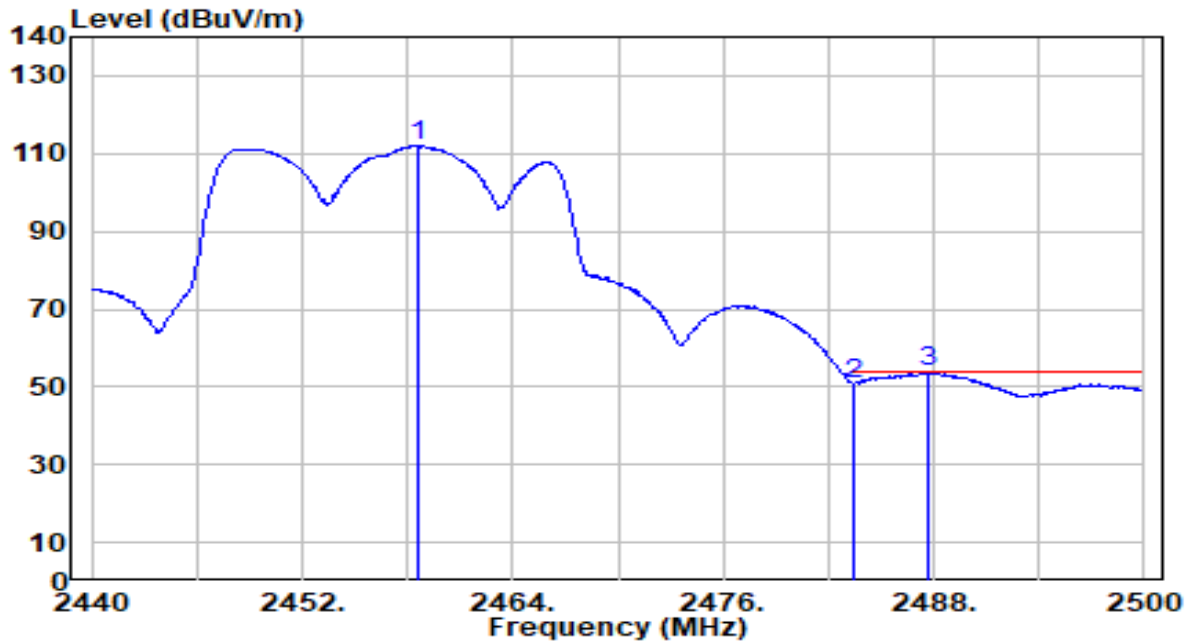


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.540	81.74	30.29	112.02	N/A	N/A	100	4	Average
2	2483.500	20.40	30.32	50.72	-3.28	54.00	100	4	Average
3	* 2487.700	23.46	30.32	53.79	-0.21	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

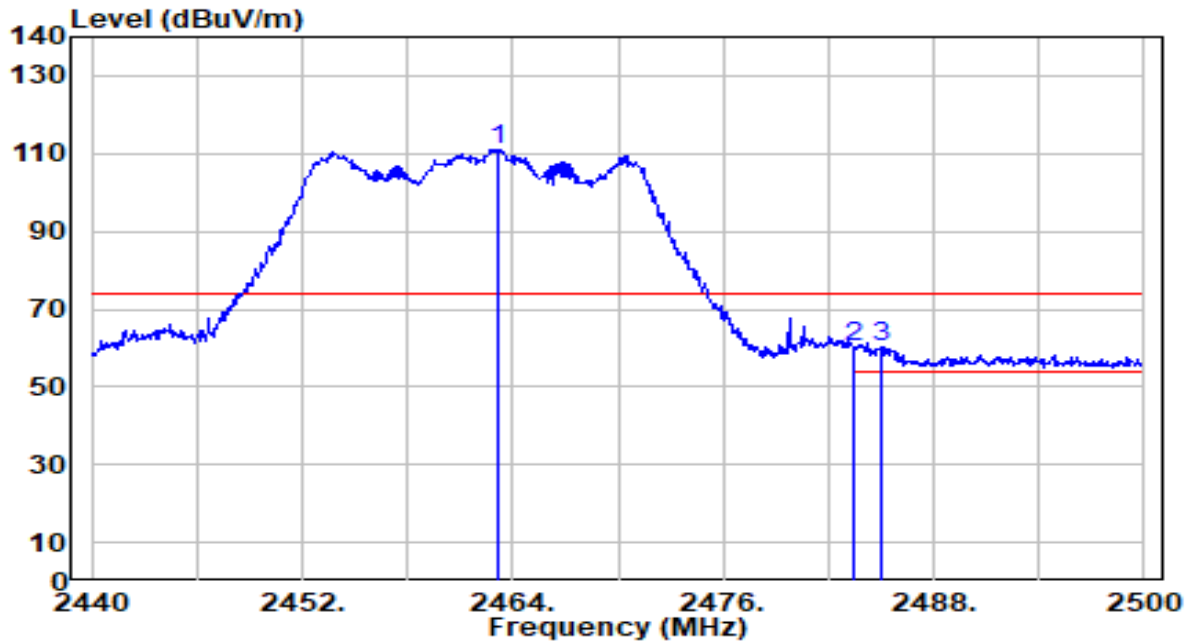


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.100	80.87	30.29	111.16	N/A	N/A	100	300	Peak
2	2483.500	29.72	30.32	60.04	-13.96	74.00	100	300	Peak
3	* 2485.060	30.11	30.32	60.43	-13.57	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

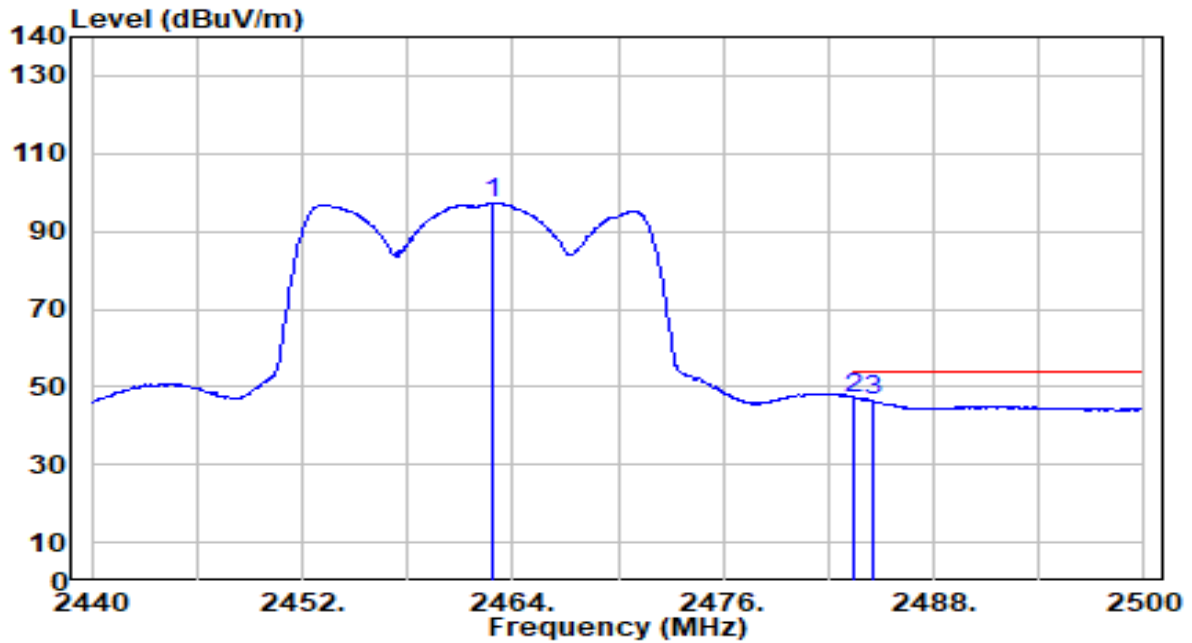


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.860	66.98	30.29	97.27	N/A	N/A	100	300	Average
2	* 2483.500	16.84	30.32	47.16	-6.84	54.00	100	300	Average
3	2484.520	16.13	30.32	46.45	-7.55	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

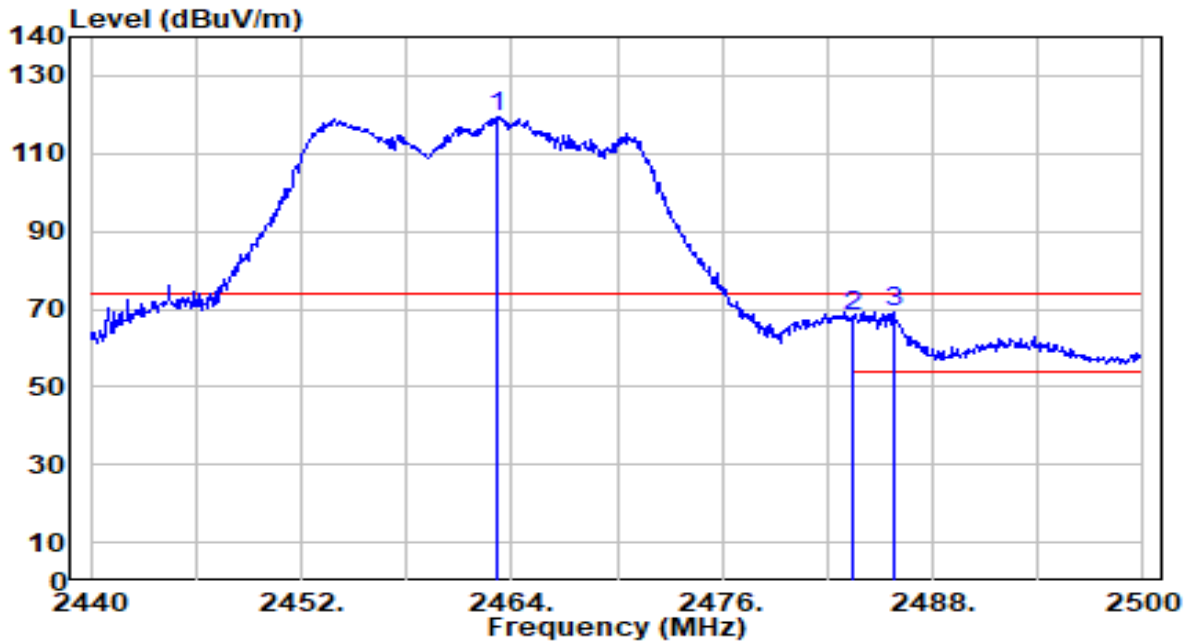


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.160	89.17	30.29	119.46	N/A	N/A	100	4	Peak
2	2483.500	37.63	30.32	67.95	-6.05	74.00	100	4	Peak
3	* 2485.780	38.97	30.32	69.29	-4.71	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

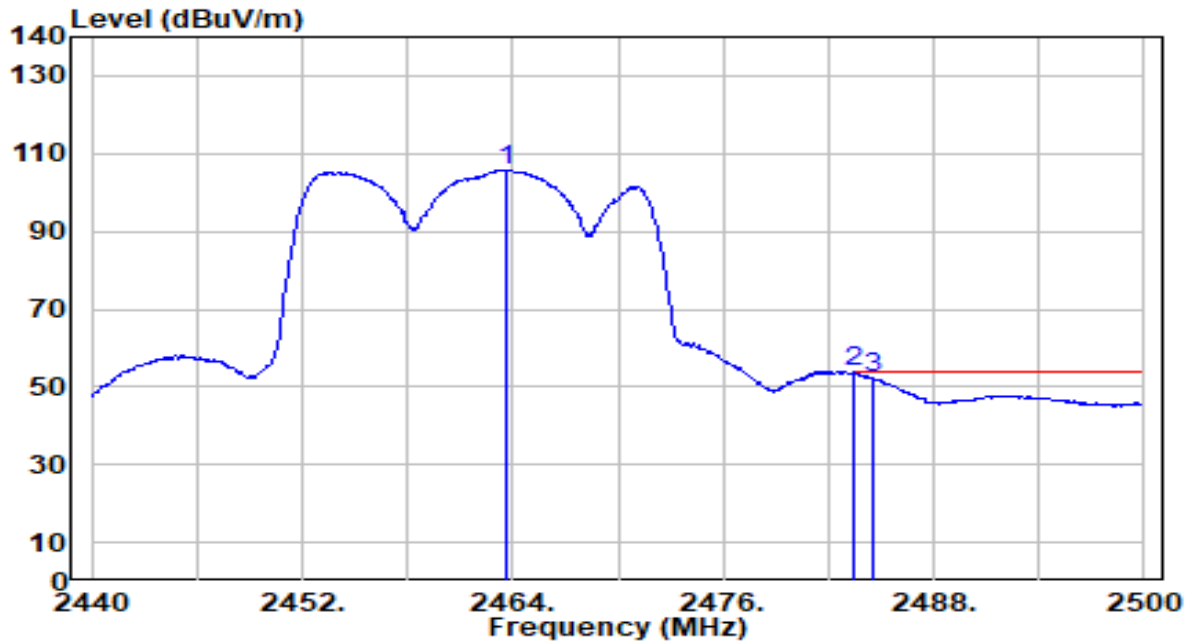


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.640	75.57	30.29	105.86	N/A	N/A	100	4	Average
2	* 2483.500	23.46	30.32	53.78	-0.22	54.00	100	4	Average
3	2484.520	21.80	30.32	52.12	-1.88	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

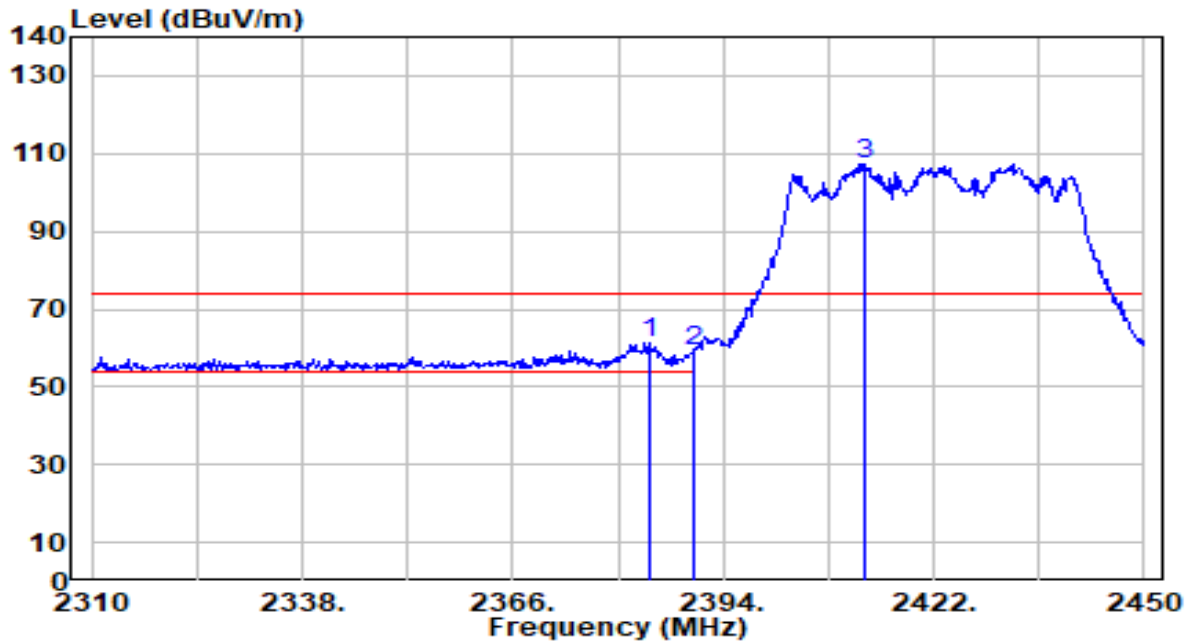


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2384.340	31.24	30.16	61.41	-12.59	74.00	100	300	Peak
2		2390.000	28.88	30.18	59.06	-14.94	74.00	100	300	Peak
3		2412.760	77.26	30.22	107.49	N/A	N/A	100	300	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

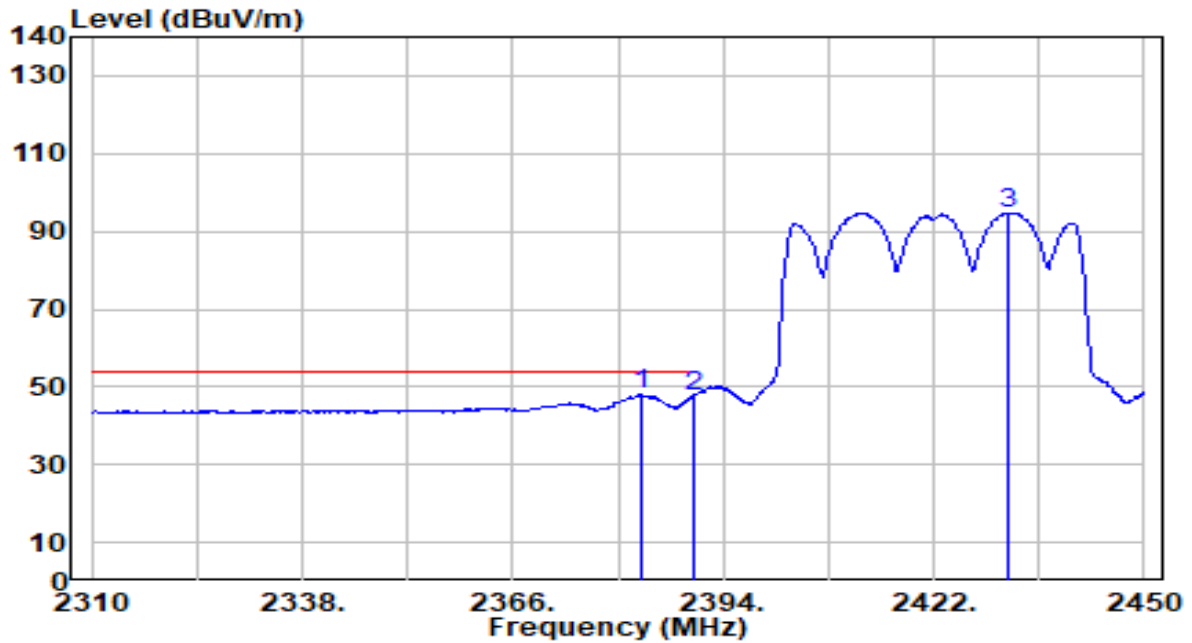


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2383.080	17.77	30.16	47.93	-6.07	54.00	100	300	Average
2		2390.000	17.42	30.18	47.60	-6.40	54.00	100	300	Average
3		2431.940	64.48	30.25	94.73	N/A	N/A	100	300	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

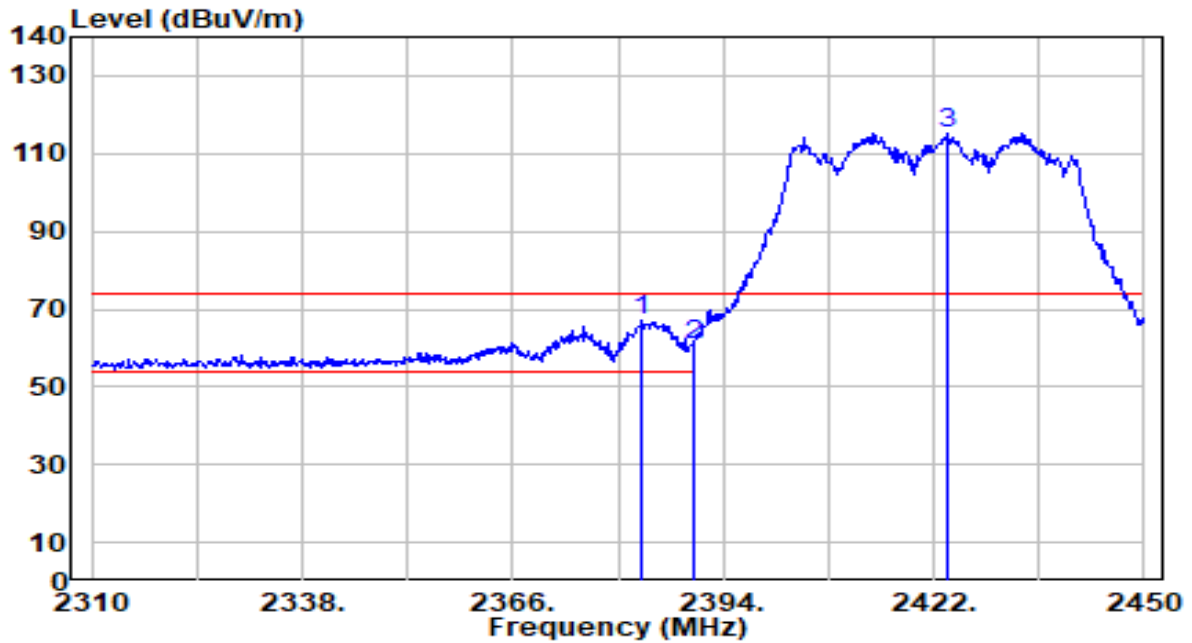


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	36.92	30.16	67.08	-6.92	74.00	100	4	Peak
2		30.45	30.18	60.63	-13.37	74.00	100	4	Peak
3		85.11	30.24	115.35	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

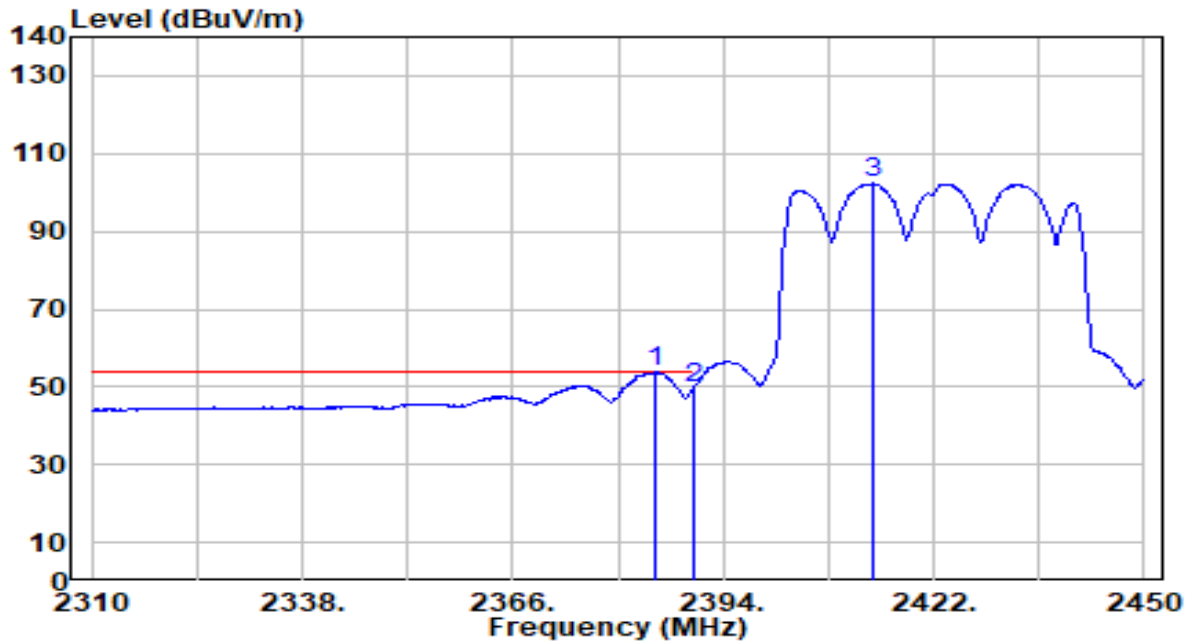


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2384.900	23.69	30.17	53.85	-0.15	54.00	100	4	Average
2		2390.000	19.37	30.18	49.55	-4.45	54.00	100	4	Average
3		2413.880	72.02	30.23	102.24	N/A	N/A	100	4	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

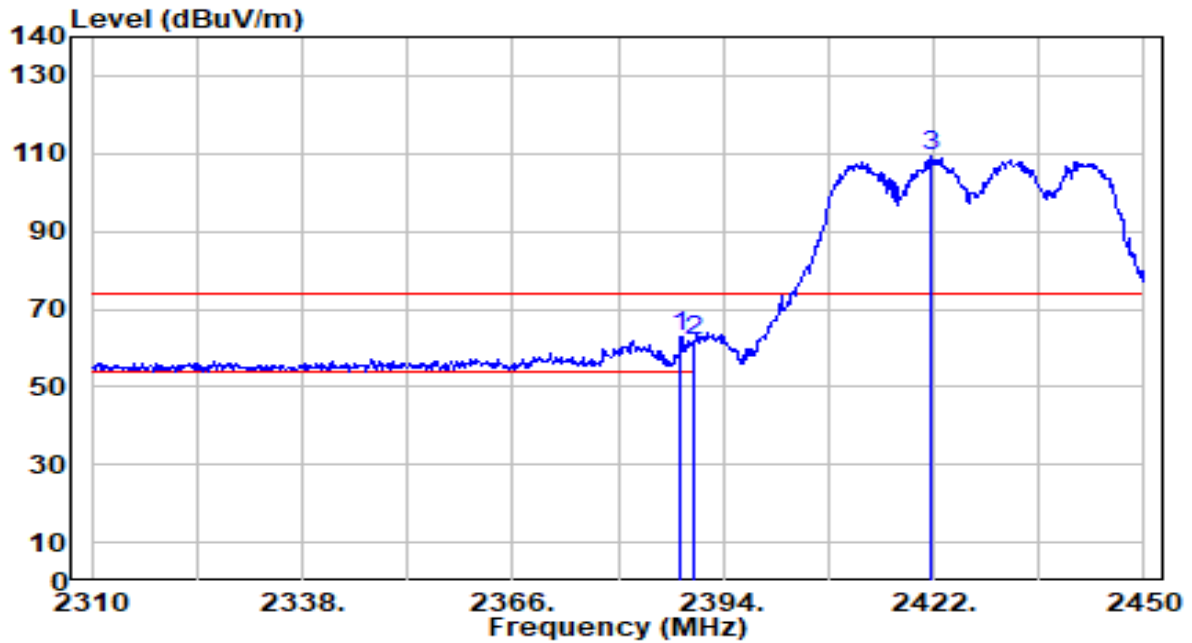


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.400	32.95	30.18	63.13	-10.87	74.00	100	300	Peak
2		2390.000	31.87	30.18	62.05	-11.95	74.00	100	300	Peak
3		2421.720	78.93	30.24	109.17	N/A	N/A	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

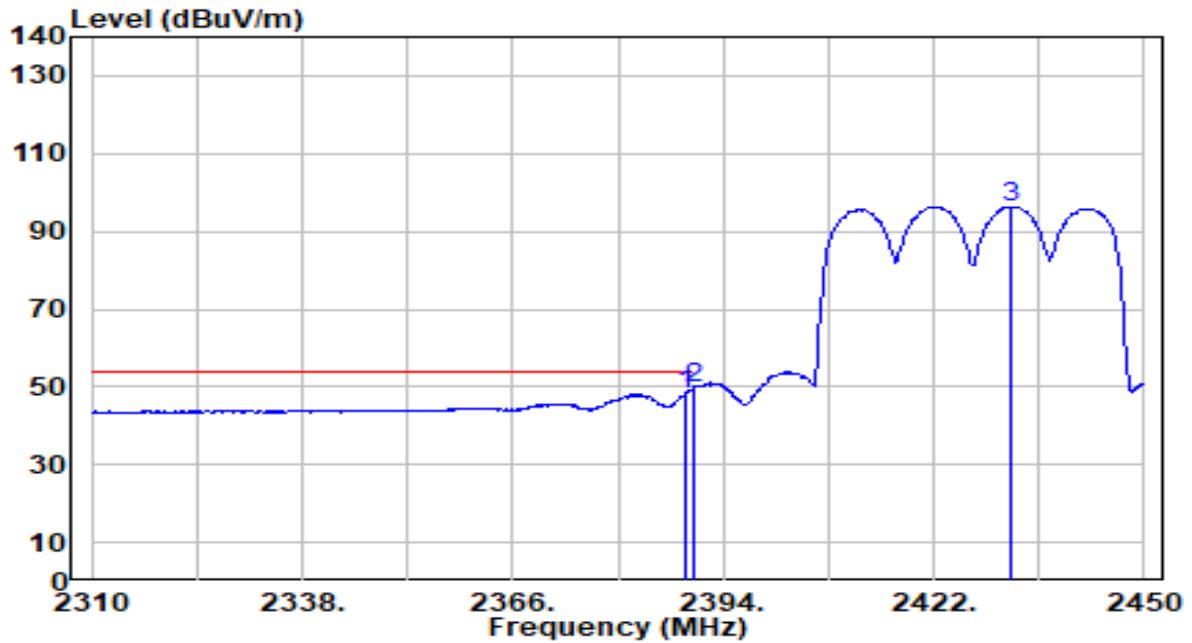


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	18.08	30.18	48.26	-5.74	54.00	100	300	Average
2	* 2390.000	19.68	30.18	49.86	-4.14	54.00	100	300	Average
3	2432.220	66.13	30.25	96.38	N/A	N/A	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

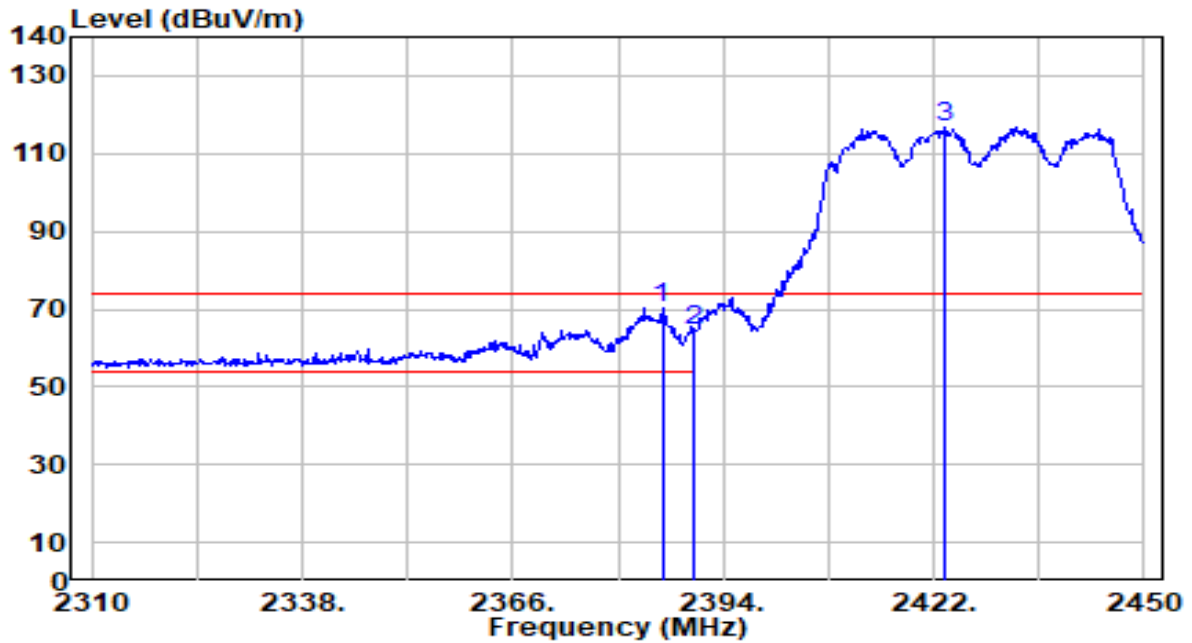


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.880	40.03	30.17	70.19	-3.81	74.00	100	4	Peak
2		2390.000	34.16	30.18	64.34	-9.66	74.00	100	4	Peak
3		2423.400	86.52	30.24	116.76	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

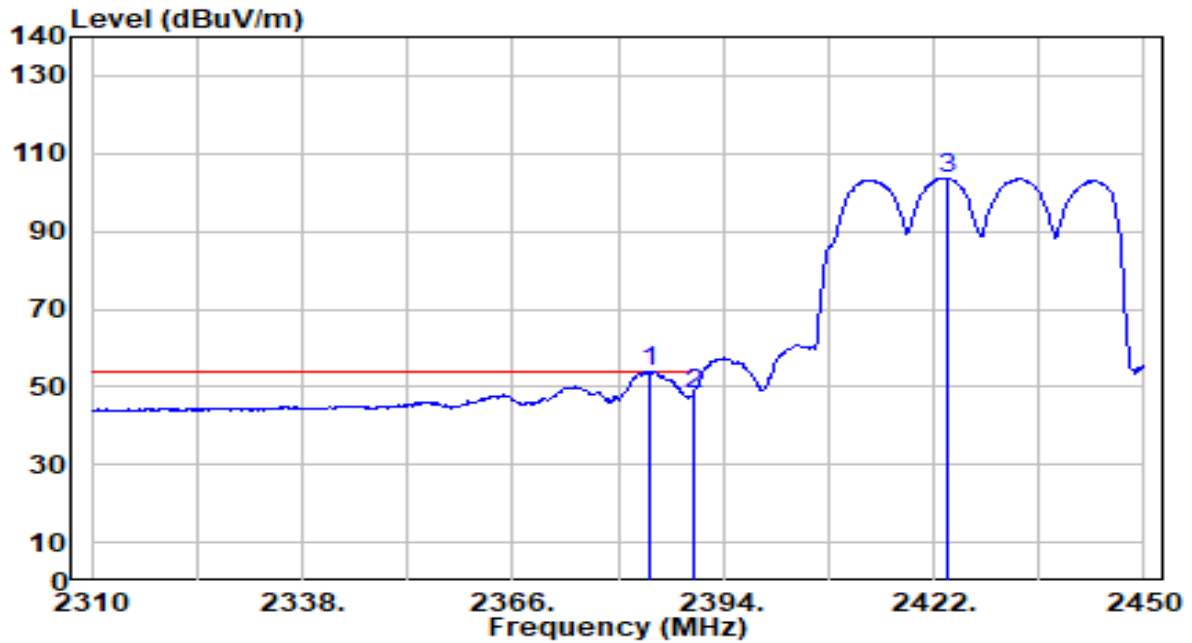


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.340	23.69	30.16	53.86	-0.14	54.00	100	4	Average
2	2390.000	17.97	30.18	48.15	-5.85	54.00	100	4	Average
3	2423.680	73.52	30.24	103.76	N/A	N/A	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

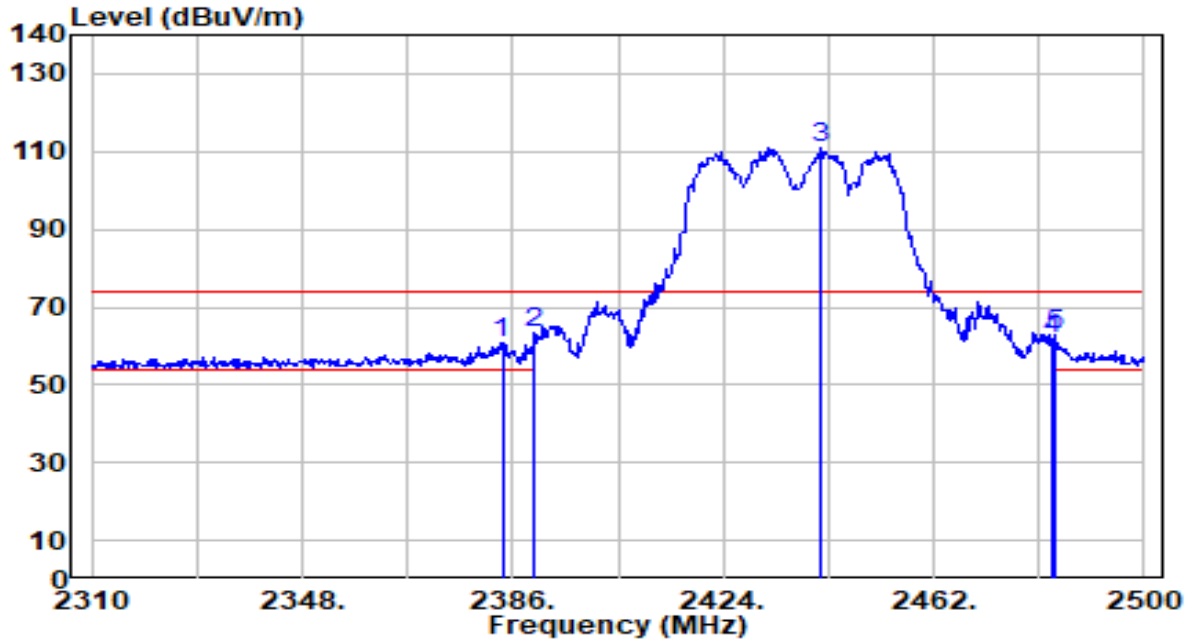


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.100	30.77	30.16	60.93	-13.07	74.00	100	300	Peak
2	* 2390.000	33.23	30.18	63.41	-10.59	74.00	100	300	Peak
3	2441.480	80.75	30.26	111.01	N/A	N/A	100	300	Peak
4	2483.500	31.73	30.32	62.05	-11.95	74.00	100	300	Peak
5	2484.040	32.34	30.32	62.66	-11.34	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

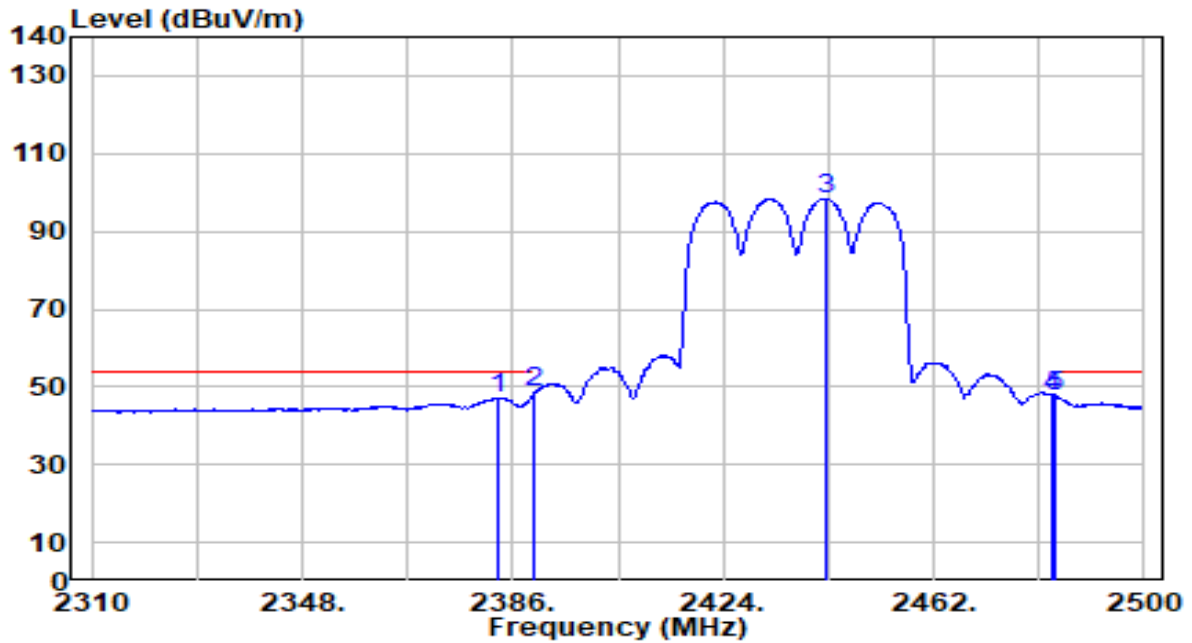


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.530	16.92	30.16	47.08	-6.92	54.00	100	300	Average
2	* 2390.000	18.18	30.18	48.36	-5.64	54.00	100	300	Average
3	2442.620	68.10	30.26	98.37	N/A	N/A	100	300	Average
4	2483.500	17.43	30.32	47.75	-6.25	54.00	100	300	Average
5	2484.040	17.25	30.32	47.57	-6.43	54.00	100	300	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

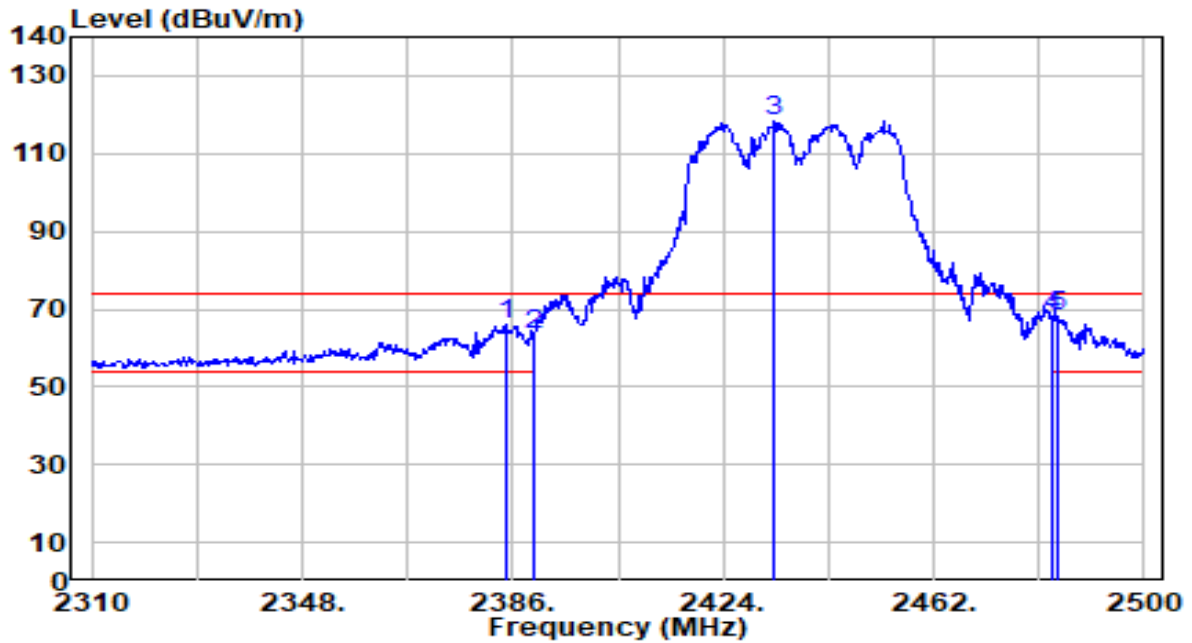


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.670	35.61	30.16	65.77	-8.23	74.00	100	4	Peak
2	2390.000	33.37	30.18	63.55	-10.45	74.00	100	4	Peak
3	2433.310	88.15	30.25	118.40	N/A	N/A	100	4	Peak
4	2483.500	37.59	30.32	67.91	-6.09	74.00	100	4	Peak
5	* 2484.610	37.94	30.32	68.26	-5.74	74.00	100	4	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

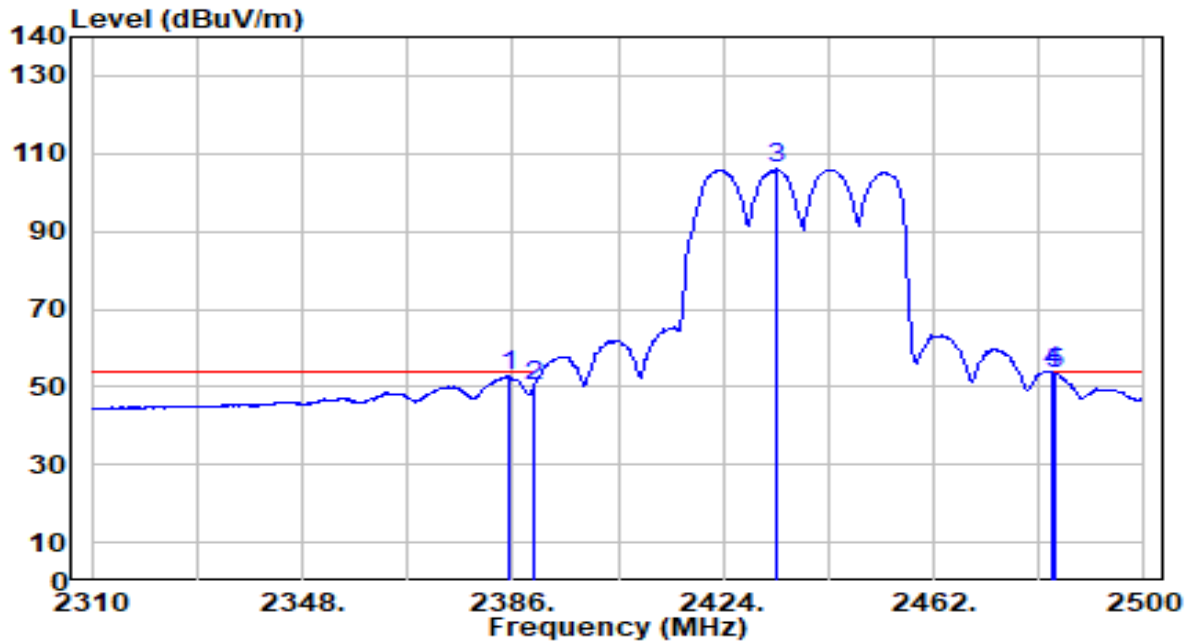


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	22.53	30.17	52.70	-1.30	54.00	100	4	Average
2	2390.000	20.18	30.18	50.36	-3.64	54.00	100	4	Average
3	2433.690	75.77	30.25	106.03	N/A	N/A	100	4	Average
4	* 2483.500	23.46	30.32	53.78	-0.22	54.00	100	4	Average
5	2484.040	23.09	30.32	53.41	-0.59	54.00	100	4	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 7_ANT 0+1	Test Voltage	AC 120V/60Hz

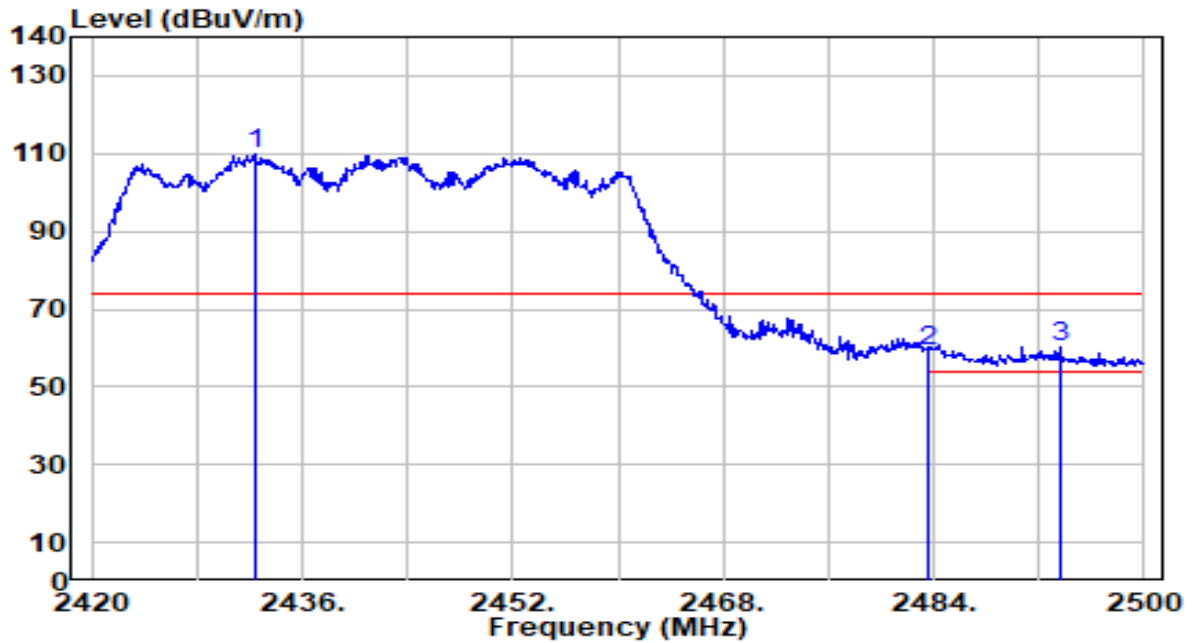


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2432.400	79.85	30.25	110.10	N/A	N/A	100	300	Peak
2	2483.500	29.08	30.32	59.40	-14.60	74.00	100	300	Peak
3	* 2493.600	30.09	30.33	60.42	-13.58	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 7_ANT 0+1	Test Voltage	AC 120V/60Hz

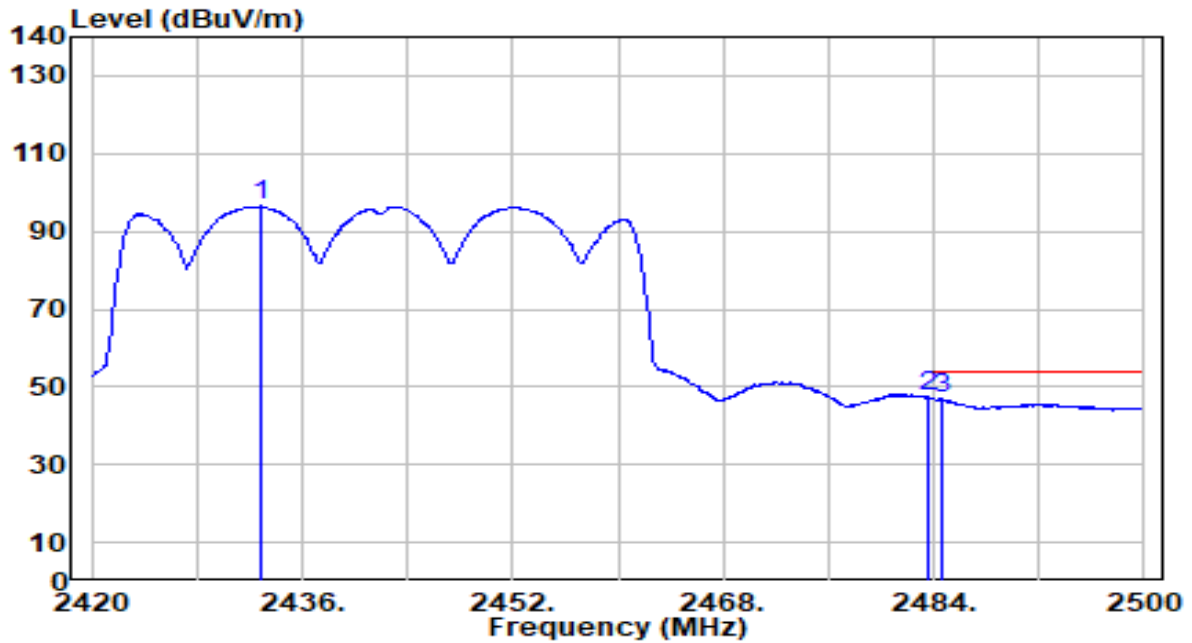


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2432.800	66.17	30.25	96.42	N/A	N/A	100	300	Average
2	* 2483.500	17.17	30.32	47.49	-6.51	54.00	100	300	Average
3	2484.640	16.50	30.32	46.82	-7.18	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 7_ANT 0+1	Test Voltage	AC 120V/60Hz

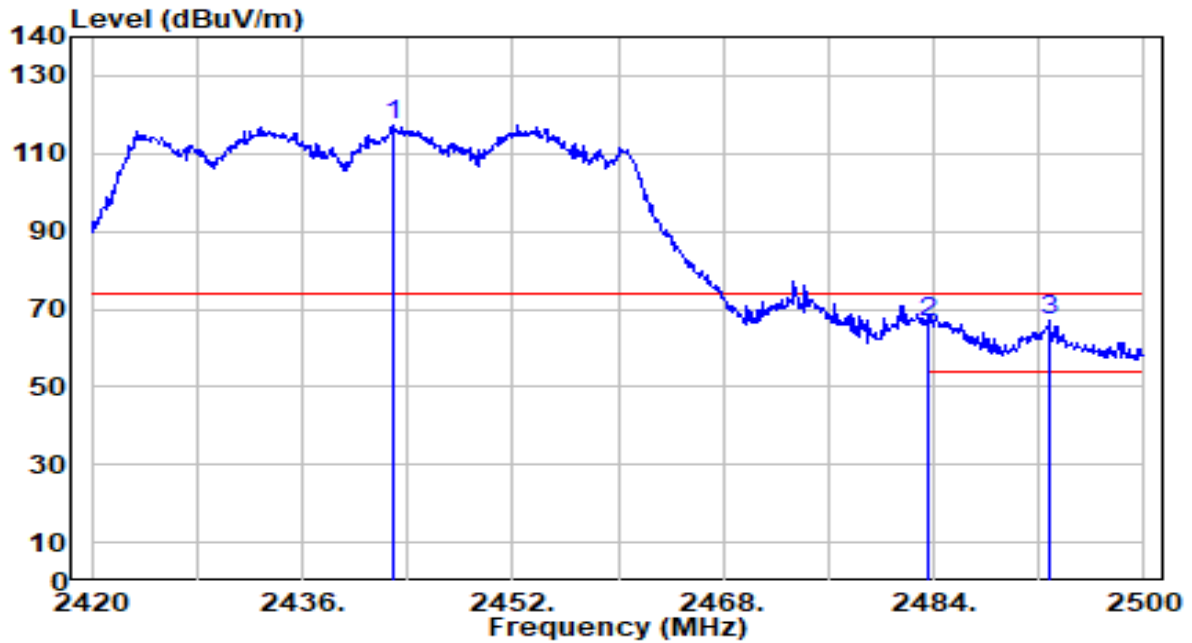


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2442.960	86.91	30.26	117.18	N/A	N/A	100	4	Peak
2	2483.500	36.26	30.32	66.58	-7.42	74.00	100	4	Peak
3	* 2492.880	36.89	30.33	67.22	-6.78	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 7_ANT 0+1	Test Voltage	AC 120V/60Hz

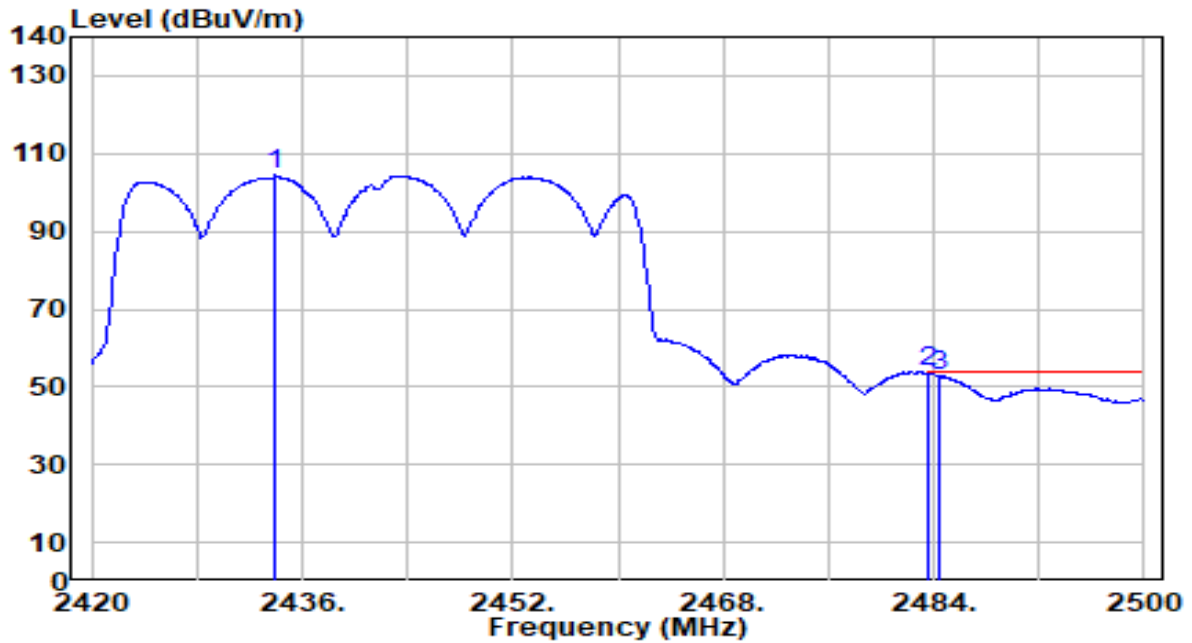


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2434.000	74.22	30.25	104.47	N/A	N/A	100	4	Average
2	* 2483.500	23.43	30.32	53.75	-0.26	54.00	100	4	Average
3	2484.480	22.43	30.32	52.75	-1.25	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

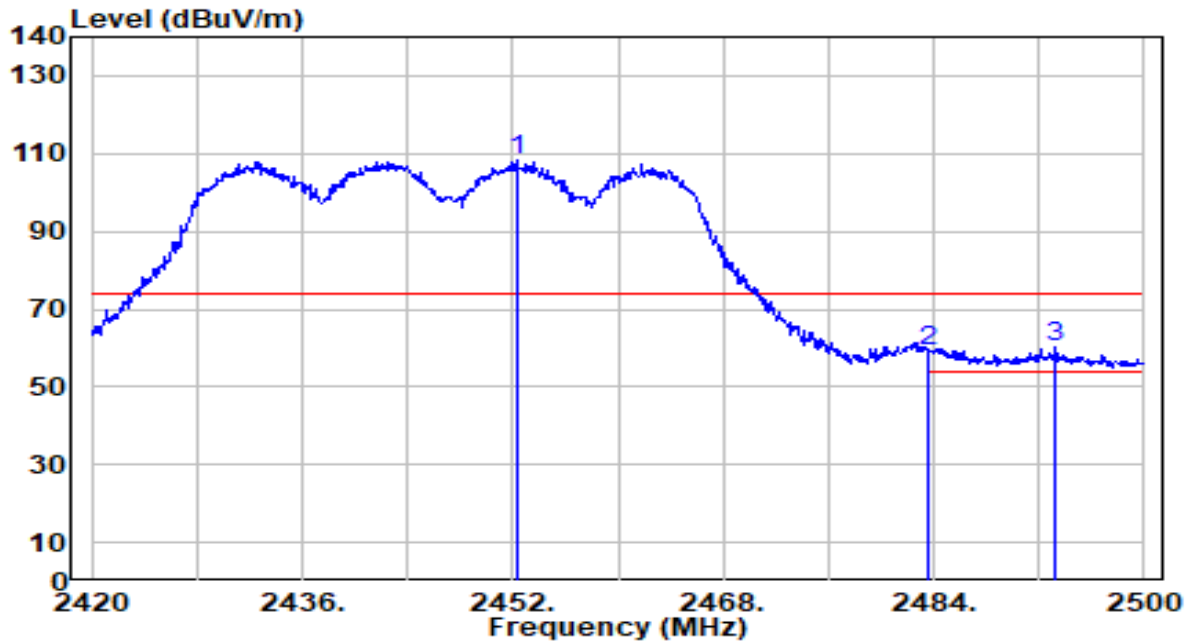


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2452.320	77.95	30.28	108.22	N/A	N/A	100	300	Peak
2	2483.500	28.72	30.32	59.04	-14.96	74.00	100	300	Peak
3	* 2493.200	29.97	30.33	60.30	-13.70	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

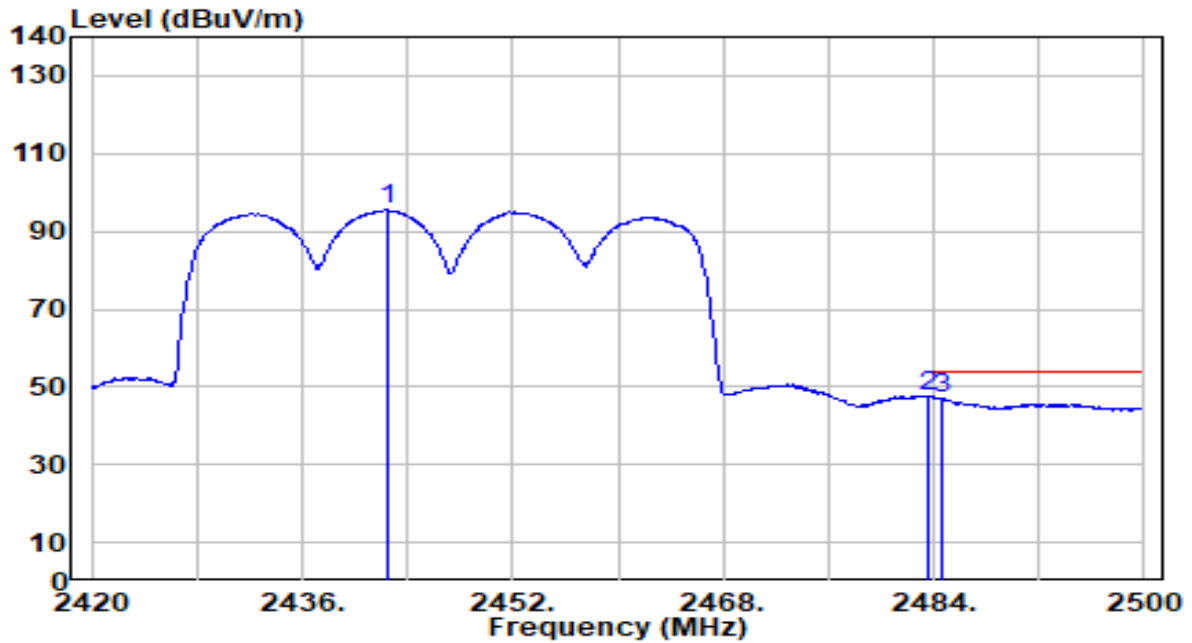


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2442.480	65.18	30.26	95.45	N/A	N/A	100	300	Average
2	* 2483.500	17.08	30.32	47.40	-6.60	54.00	100	300	Average
3	2484.720	16.80	30.32	47.12	-6.88	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

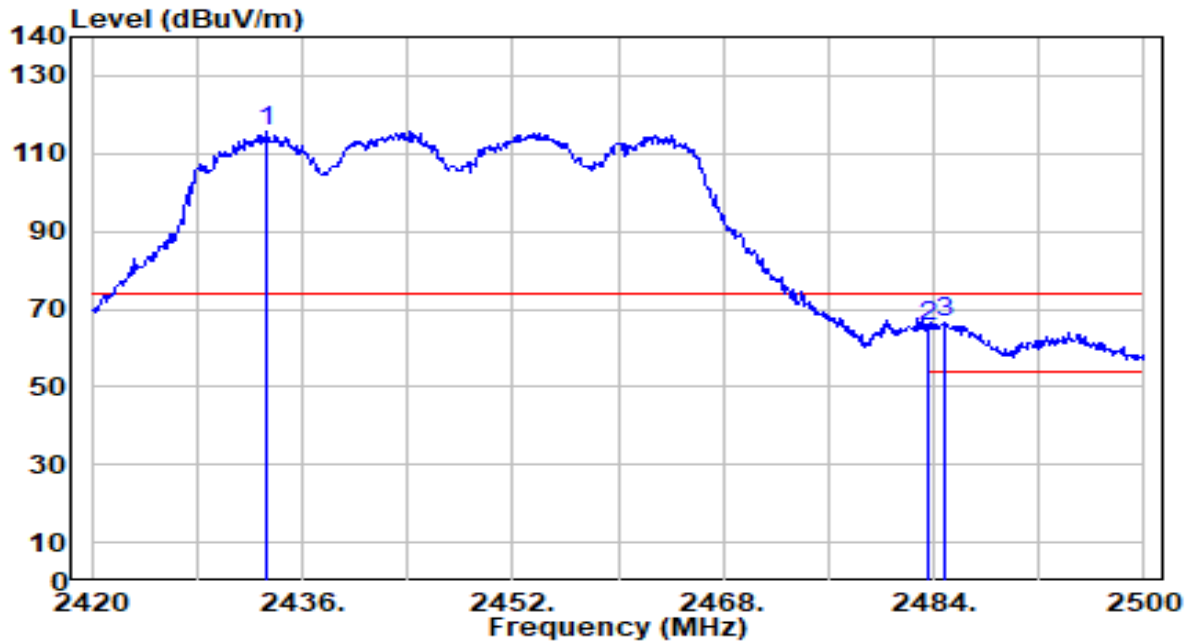


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2433.280	85.49	30.25	115.74	N/A	N/A	100	4	Peak
2	2483.500	34.96	30.32	65.28	-8.72	74.00	100	4	Peak
3	* 2484.880	36.32	30.32	66.64	-7.36	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

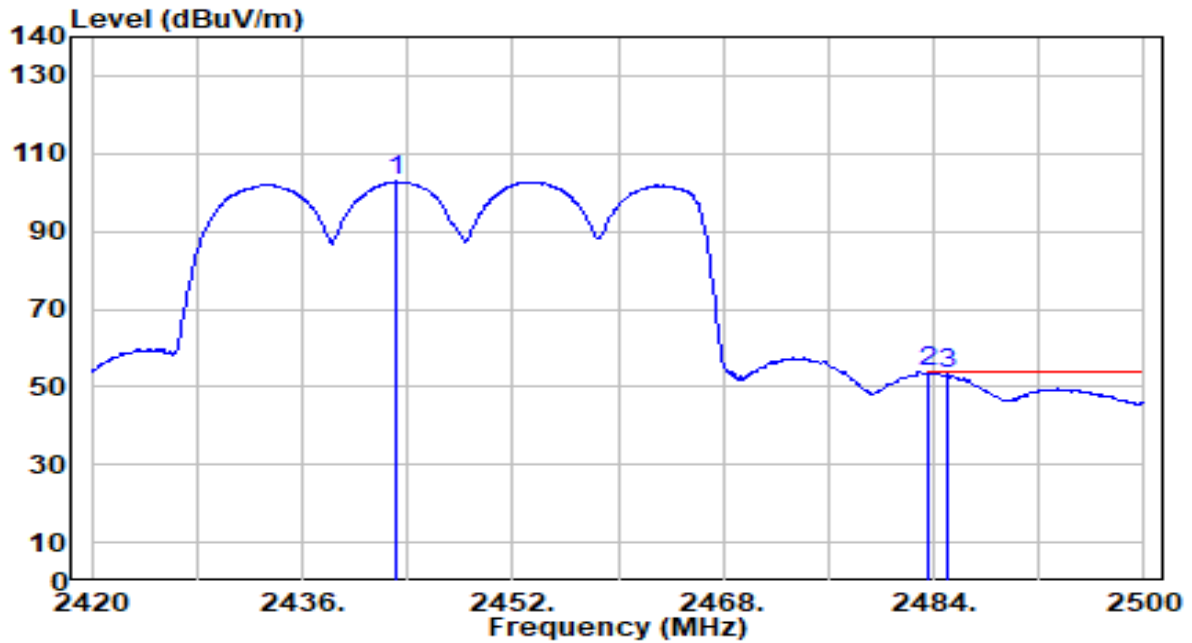


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.200	72.53	30.27	102.79	N/A	N/A	100	4	Average
2	* 2483.500	23.46	30.32	53.78	-0.22	54.00	100	4	Average
3	2484.960	22.85	30.32	53.17	-0.83	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

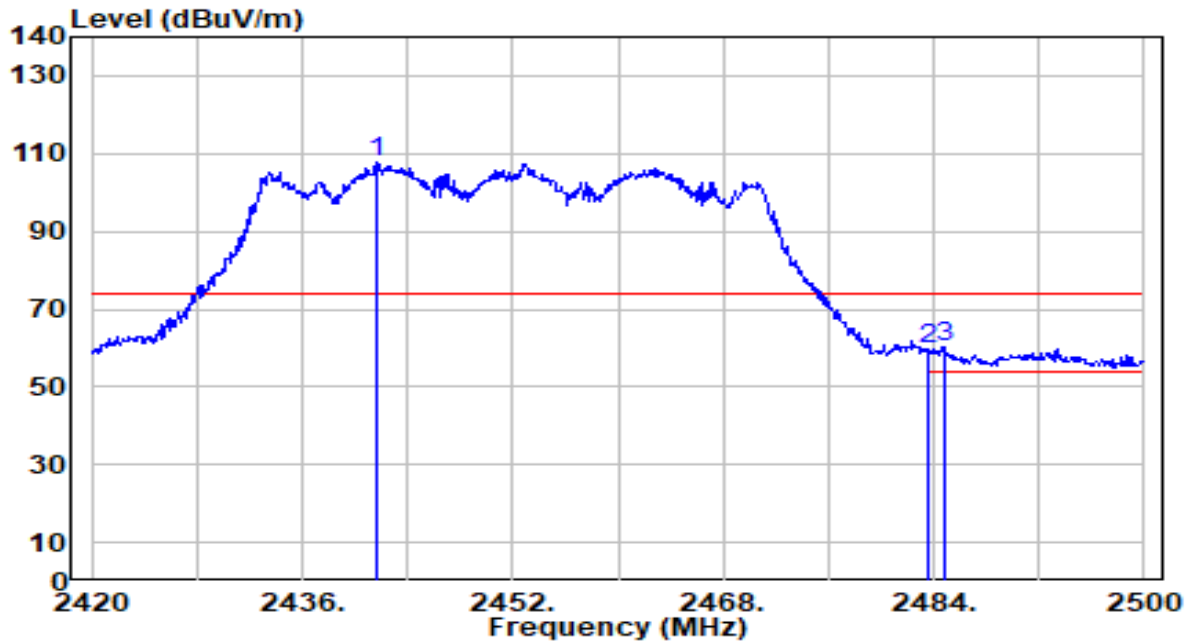


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2441.600	77.60	30.26	107.86	N/A	N/A	100	300	Peak
2	2483.500	29.56	30.32	59.88	-14.12	74.00	100	300	Peak
3	* 2484.880	29.80	30.32	60.12	-13.88	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

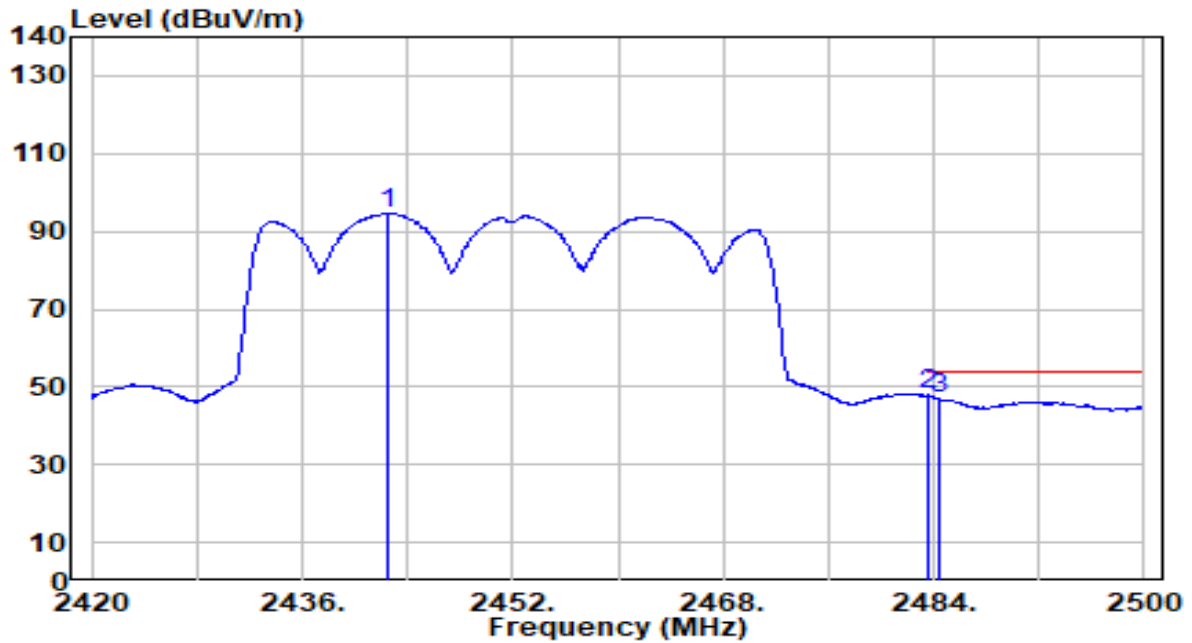


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2442.480	64.36	30.26	94.62	N/A	N/A	100	300	Average
2	* 2483.500	17.56	30.32	47.87	-6.13	54.00	100	300	Average
3	2484.480	16.51	30.32	46.83	-7.17	54.00	100	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

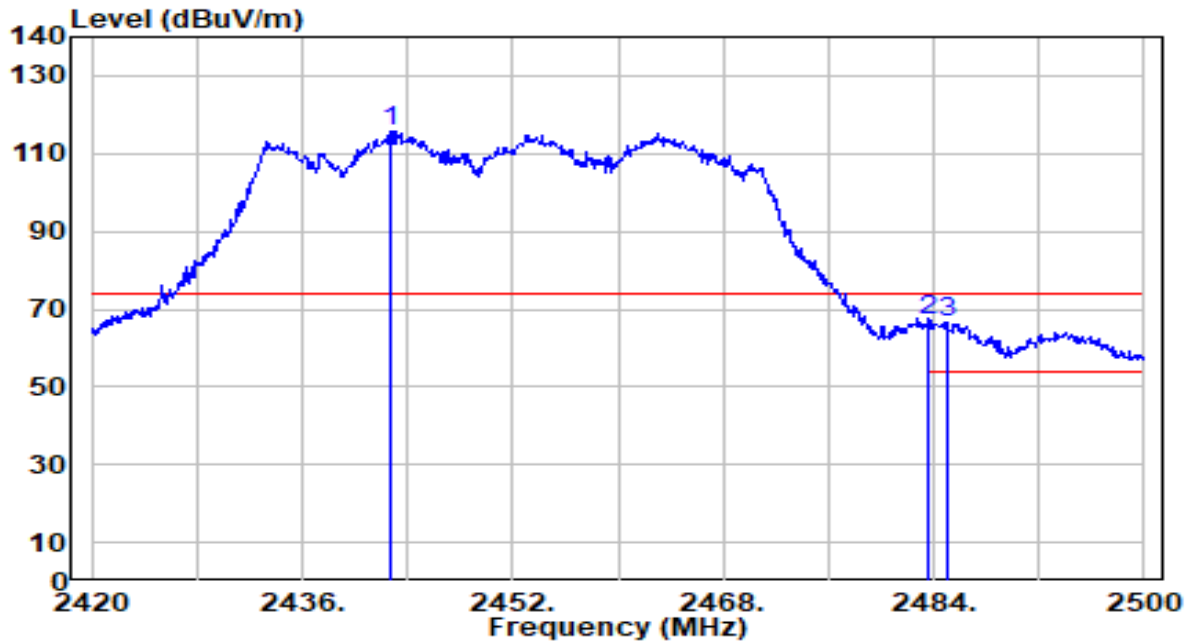


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2442.720	85.47	30.26	115.74	N/A	N/A	100	4	Peak
2	* 2483.500	36.59	30.32	66.91	-7.09	74.00	100	4	Peak
3	2484.960	36.10	30.32	66.42	-7.58	74.00	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-09-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

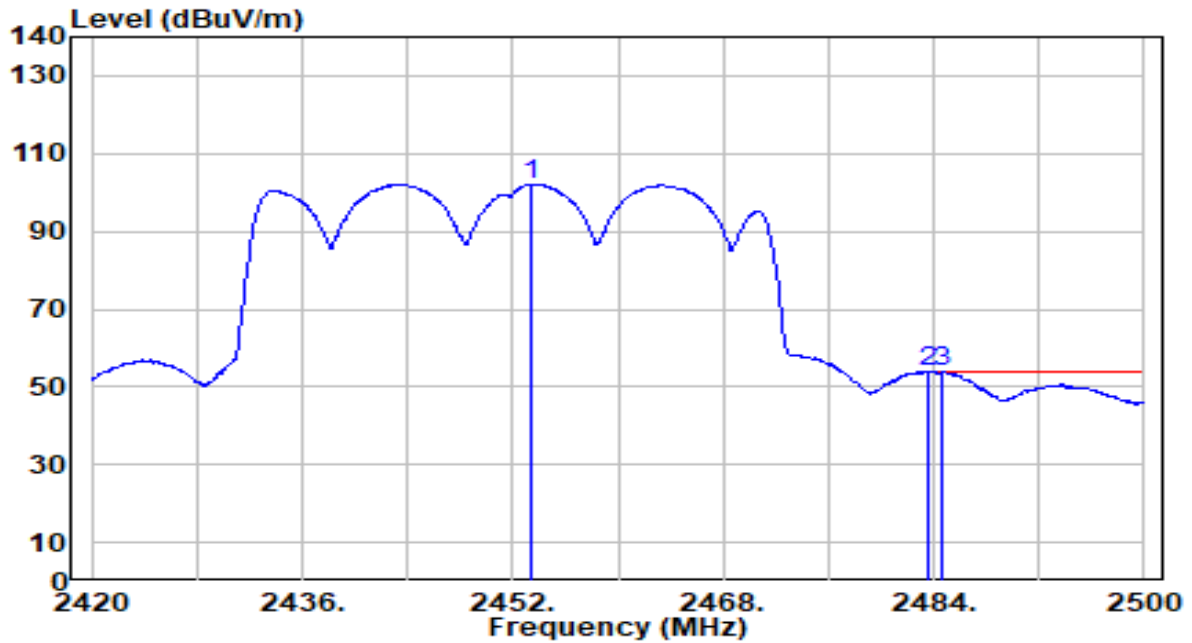

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.440	71.88	30.28	102.16	N/A	N/A	100	4	Average
2	2483.500	23.31	30.32	53.63	-0.37	54.00	100	4	Average
3	* 2484.720	23.41	30.32	53.73	-0.27	54.00	100	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

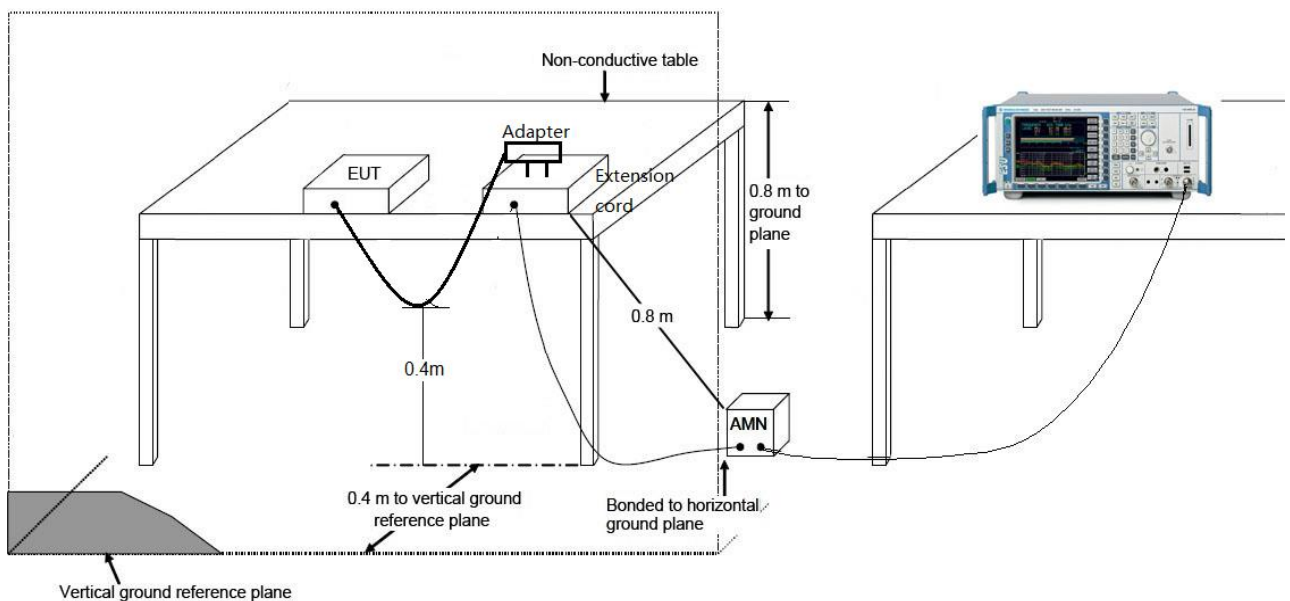

7.8.3. Test Result

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-07-12
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.4°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

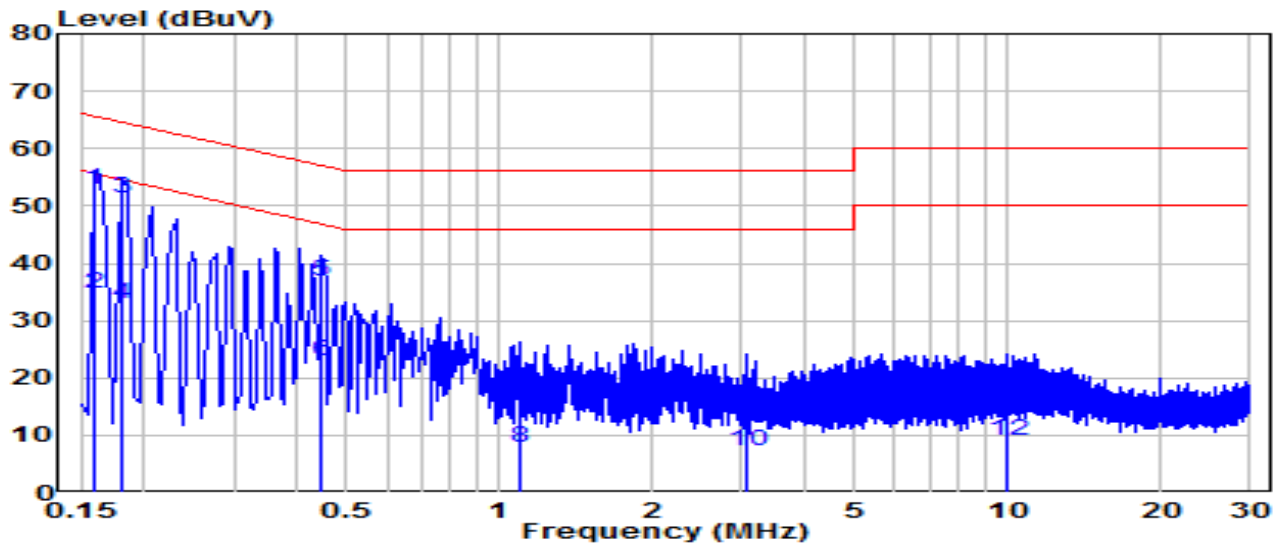


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	* 0.159	43.24	9.62	52.86	-12.66	65.52	QP
2	* 0.159	25.01	9.62	34.63	-20.89	55.52	Average
3	0.181	41.71	9.62	51.33	-13.08	64.42	QP
4	0.181	23.19	9.62	32.81	-21.60	54.42	Average
5	0.447	27.11	9.64	36.75	-20.18	56.93	QP
6	0.447	13.33	9.64	22.96	-23.97	46.93	Average
7	1.099	7.56	9.67	17.24	-38.76	56.00	QP
8	1.099	-1.75	9.67	7.92	-38.08	46.00	Average
9	3.048	3.15	9.71	12.86	-43.14	56.00	QP
10	3.048	-2.59	9.71	7.12	-38.88	46.00	Average
11	9.928	6.11	9.86	15.97	-44.03	60.00	QP
12	9.928	-0.77	9.86	9.08	-40.92	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-07-12
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.4°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

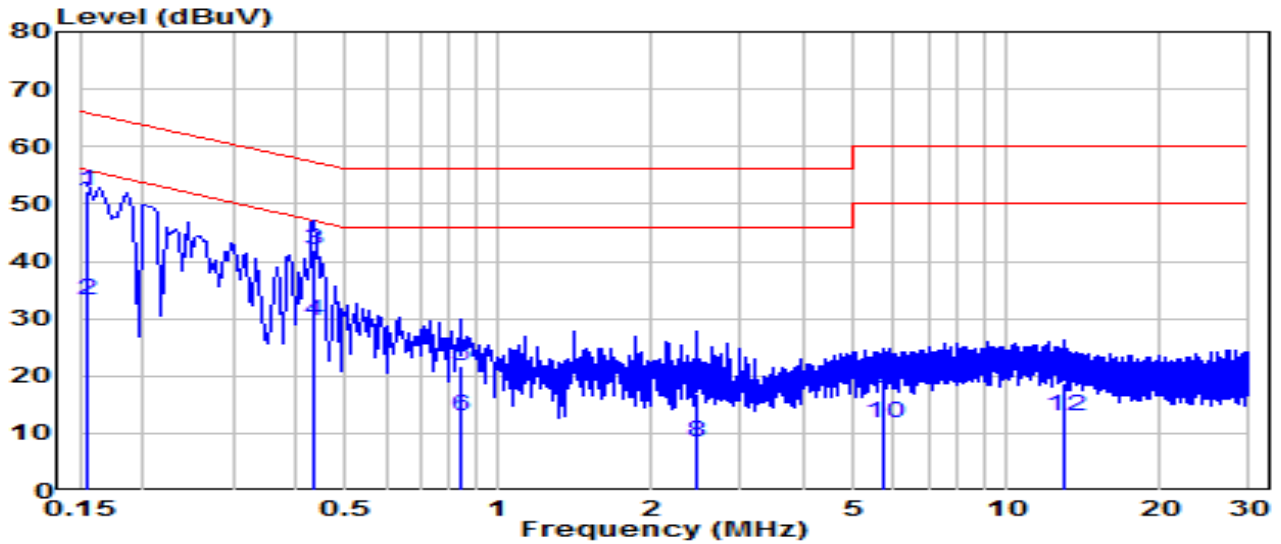


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	42.73	9.62	52.35	-13.41	65.75	QP
2	*	23.73	9.62	33.35	-22.40	55.75	Average
3		32.30	9.64	41.93	-15.25	57.19	QP
4		19.83	9.64	29.47	-17.72	47.19	Average
5		12.18	9.66	21.85	-34.15	56.00	QP
6		3.38	9.66	13.04	-32.96	46.00	Average
7		7.09	9.70	16.79	-39.21	56.00	QP
8		-1.21	9.70	8.49	-37.51	46.00	Average
9		8.16	9.77	17.93	-42.07	60.00	QP
10		2.06	9.77	11.82	-38.18	50.00	Average
11		8.74	9.91	18.65	-41.35	60.00	QP
12		3.05	9.91	12.96	-37.04	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-07-12
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.4°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

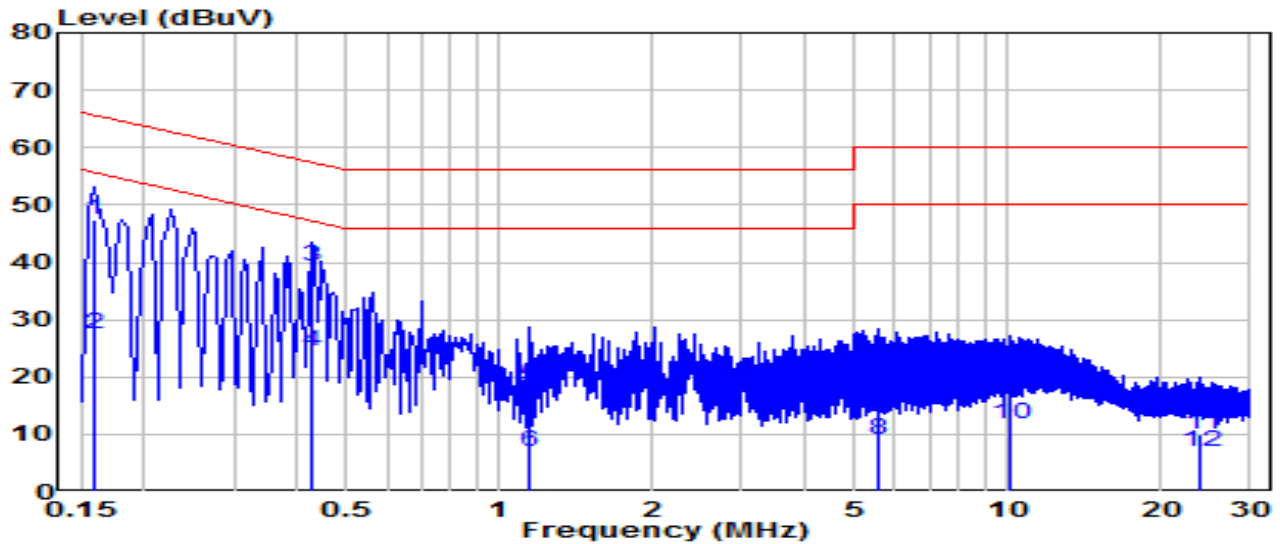


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	* 0.159	37.80	9.62	47.42	-18.10	65.52	QP
2	* 0.159	17.97	9.62	27.59	-27.93	55.52	Average
3	0.429	29.53	9.64	39.17	-18.10	57.27	QP
4	0.429	14.68	9.64	24.31	-22.96	47.27	Average
5	1.149	8.72	9.67	18.40	-37.60	56.00	QP
6	1.149	-2.64	9.67	7.03	-38.97	46.00	Average
7	5.558	9.82	9.76	19.58	-40.42	60.00	QP
8	5.558	-0.75	9.76	9.01	-40.99	50.00	Average
9	10.063	10.93	9.86	20.79	-39.21	60.00	QP
10	10.063	2.02	9.86	11.88	-38.12	50.00	Average
11	24.047	0.15	9.91	10.06	-49.94	60.00	QP
12	24.047	-3.06	9.91	6.85	-43.15	50.00	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Wi-Fi 6 Air Router	Date of Test	2023-07-12
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.4°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

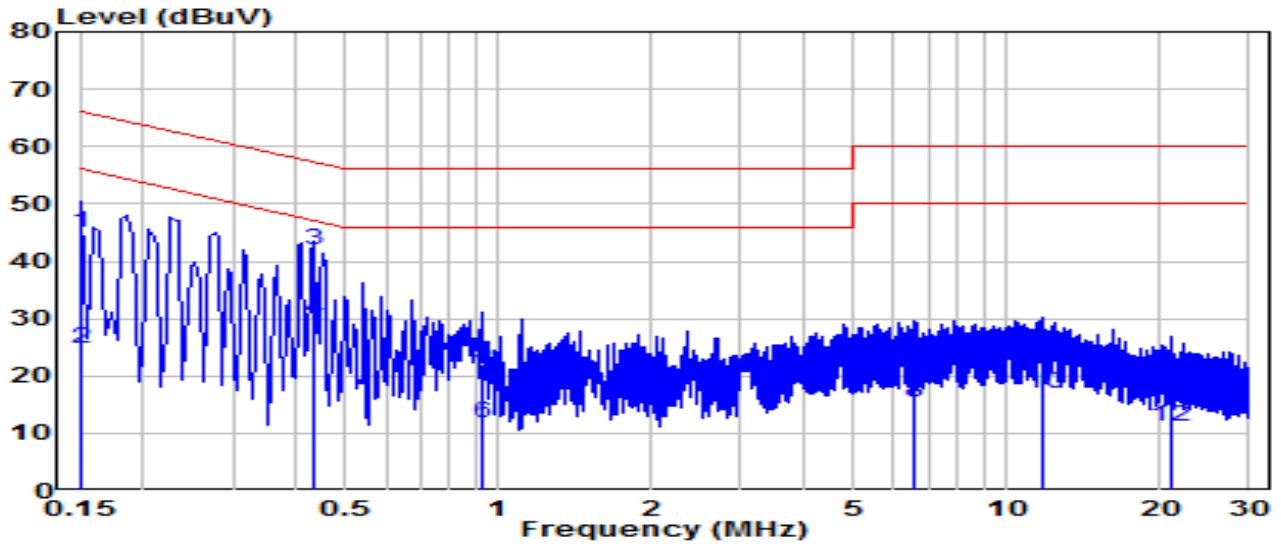

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	35.51	9.62	45.13	-20.87	66.00	QP
2	0.150	15.09	9.62	24.71	-31.29	56.00	Average
3	* 0.433	32.35	9.64	41.99	-15.20	57.19	QP
4	* 0.433	20.36	9.64	29.99	-17.19	47.19	Average
5	0.924	12.26	9.67	21.92	-34.08	56.00	QP
6	0.924	2.21	9.67	11.88	-34.12	46.00	Average
7	6.607	12.72	9.79	22.50	-37.50	60.00	QP
8	6.607	5.58	9.79	15.37	-34.63	50.00	Average
9	11.804	13.84	9.89	23.73	-36.27	60.00	QP
10	11.804	7.11	9.89	17.00	-33.00	50.00	Average
11	20.956	7.45	10.00	17.45	-42.55	60.00	QP
12	20.956	1.29	10.00	11.30	-38.70	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2302TW0116-UT” file.

Appendix B : External Photograph

Refer to “2302TW0116-UE” file.

Appendix C : Internal Photograph

Refer to “2302TW0116-UI” file.

————— The End —————