




802.11 n40 CH06 (2437MHz)

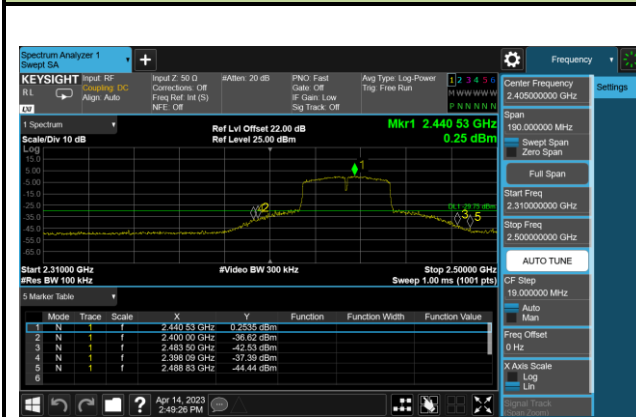


802.11 n40 CH06 (2437MHz)

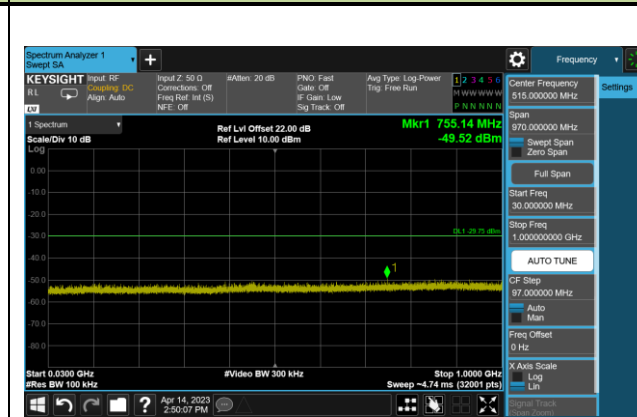

802.11 n40 CH06 (2437MHz)

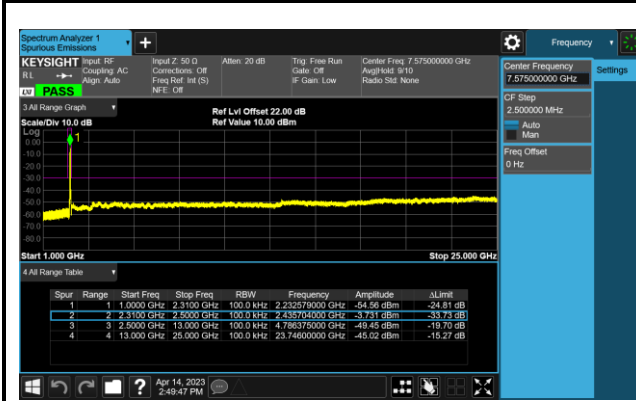


802.11 n40 CH09 (2452MHz)

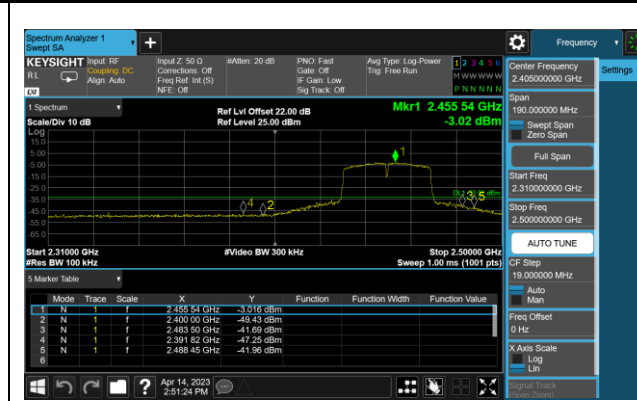

802.11 n40 CH09 (2452MHz)




802.11 n40 CH09 (2452MHz)

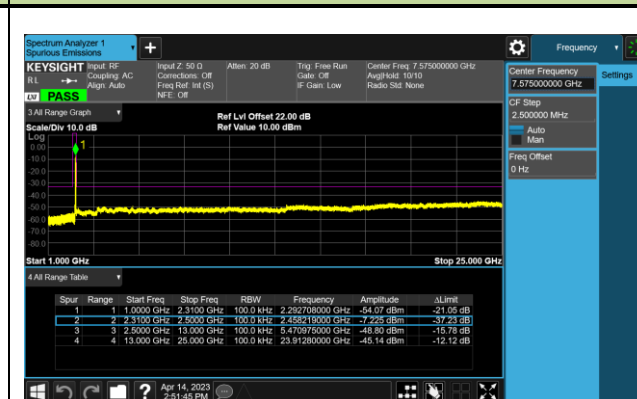


Antenna 1


802.11 b CH01 (2412MHz)

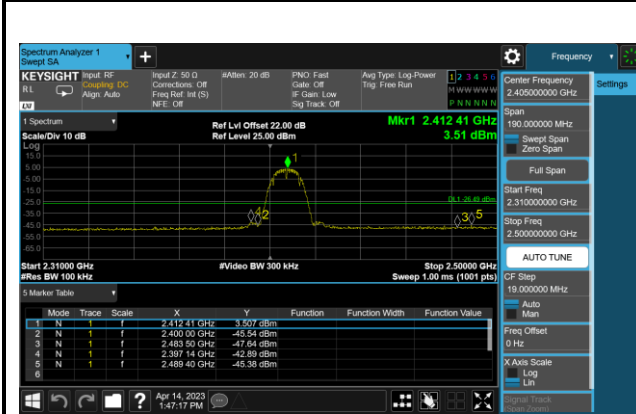


802.11 b CH01 (2412MHz)

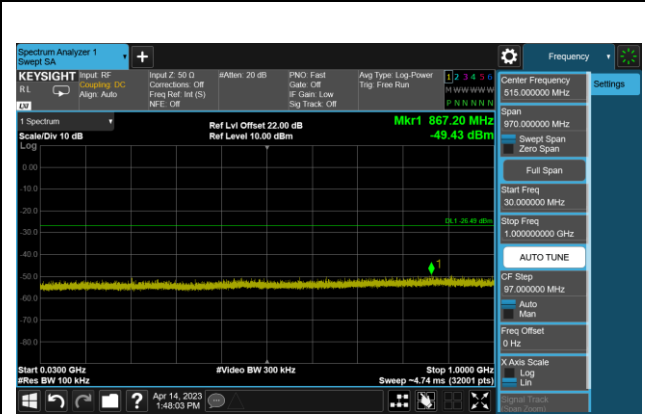


802.11 b CH01 (2412MHz)

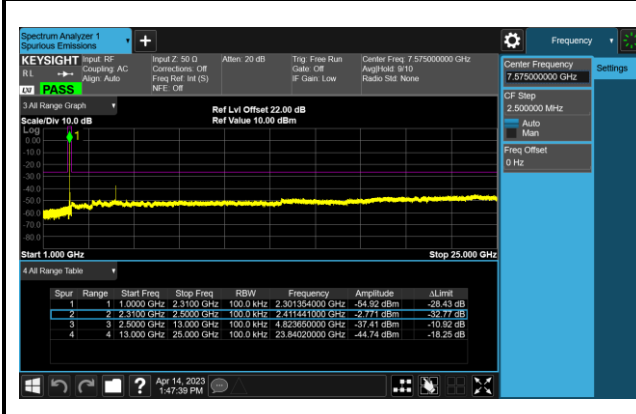


802.11 b CH06 (2437MHz)



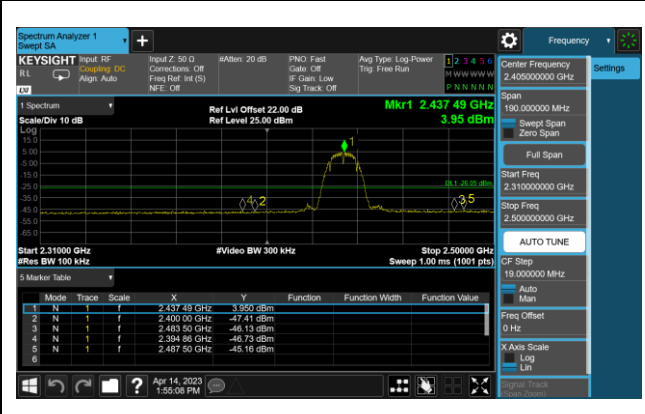




802.11 b CH06 (2437MHz)

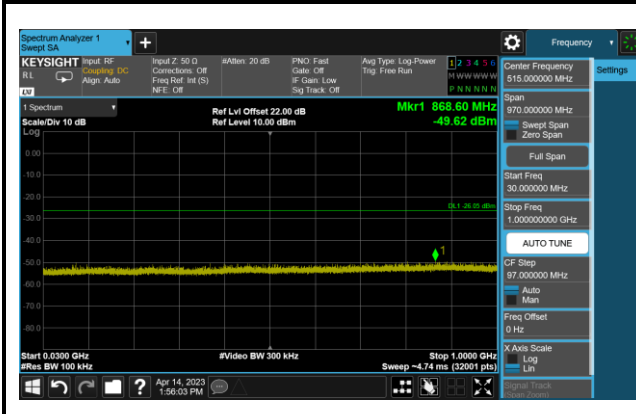


802.11 b CH06 (2437MHz)

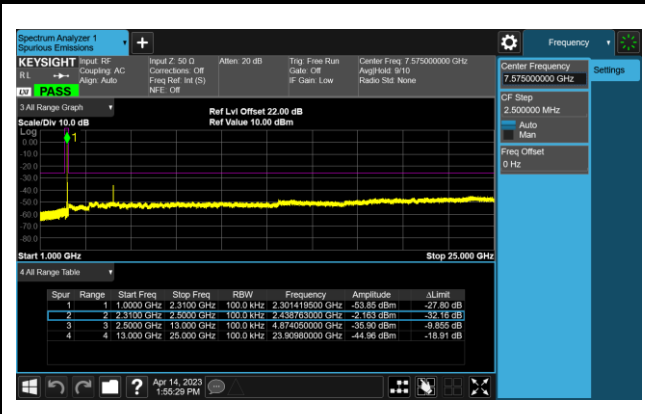

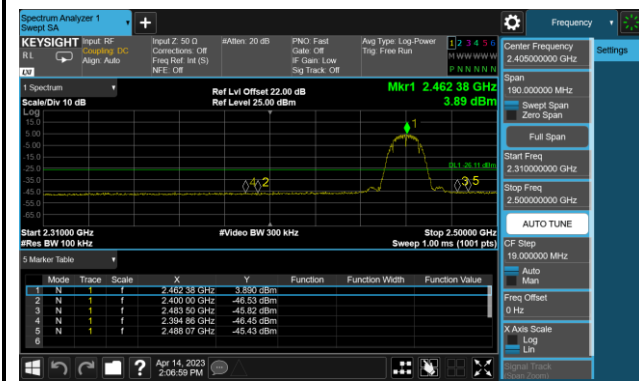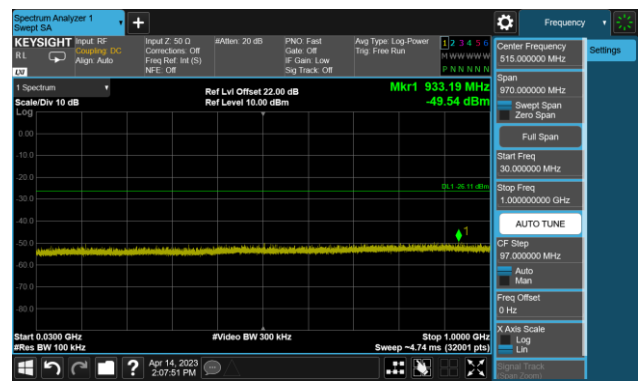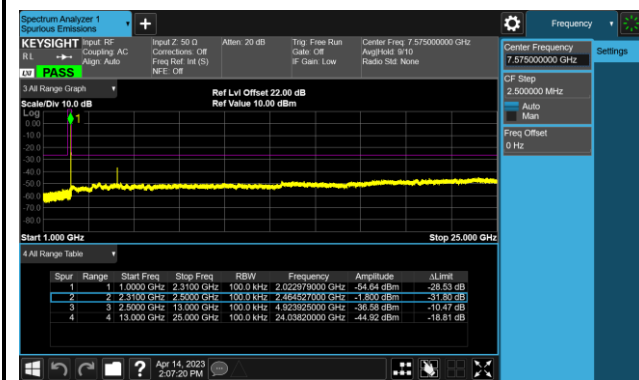
802.11 b CH11 (2462MHz)

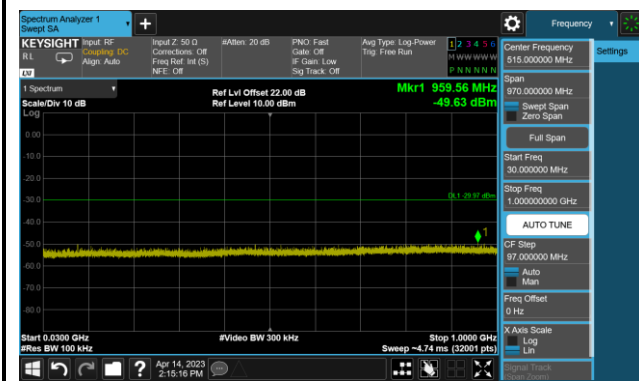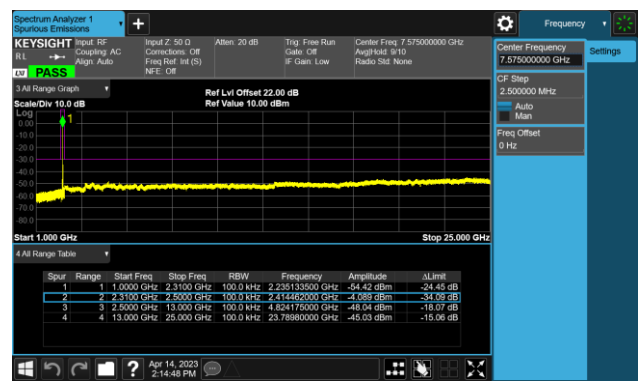802.11 b CH11 (2462MHz)

802.11 b CH11 (2462MHz)

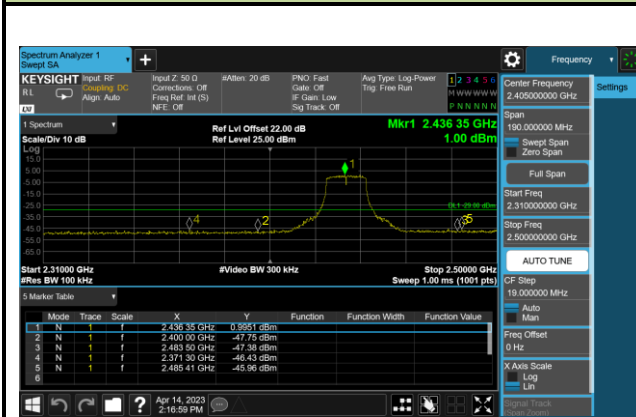802.11 g CH01 (2412MHz)

802.11 g CH01 (2412MHz)

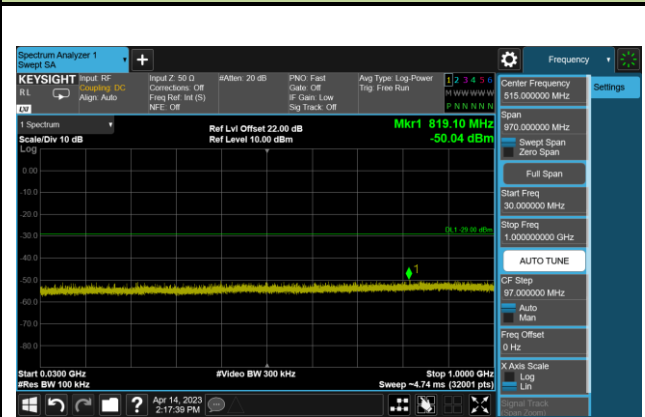802.11 g CH01 (2412MHz)


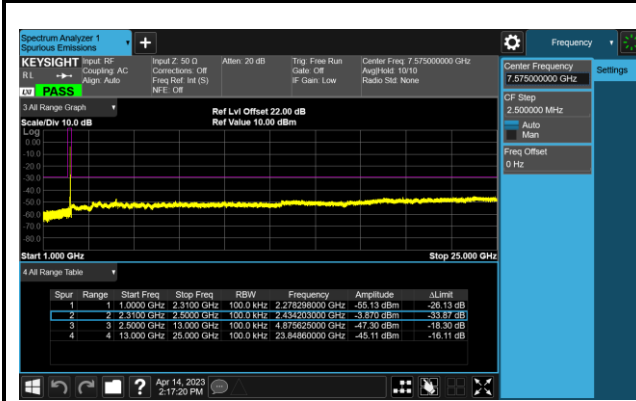
802.11 g CH06 (2437MHz)




802.11 g CH06 (2437MHz)



802.11 g CH06 (2437MHz)




802.11 g CH11 (2462MHz)

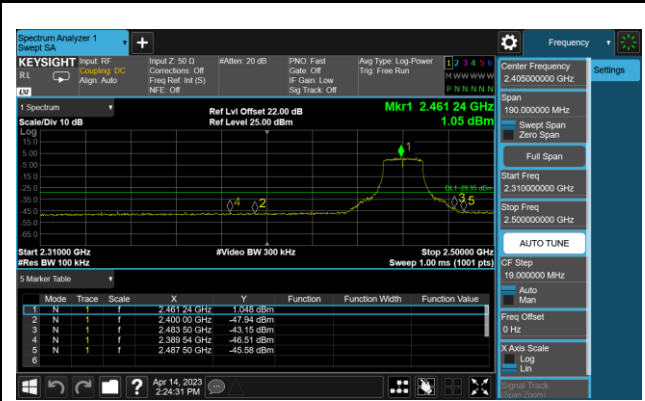


802.11 g CH11 (2462MHz)



802.11 g CH11 (2462MHz)

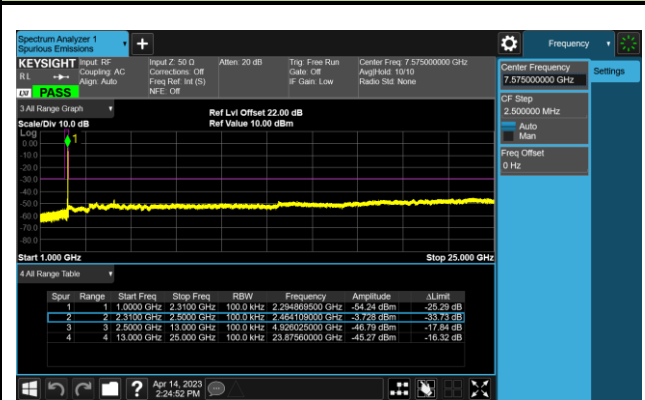


802.11 n20 CH01 (2412MHz)

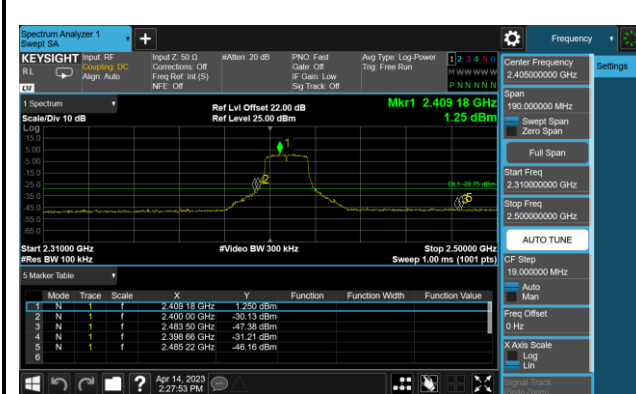


802.11 n20 CH01 (2412MHz)




802.11 n20 CH01 (2412MHz)

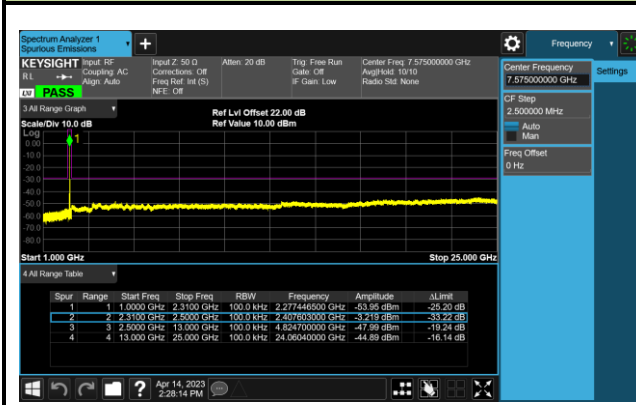


802.11 n20 CH06 (2437MHz)

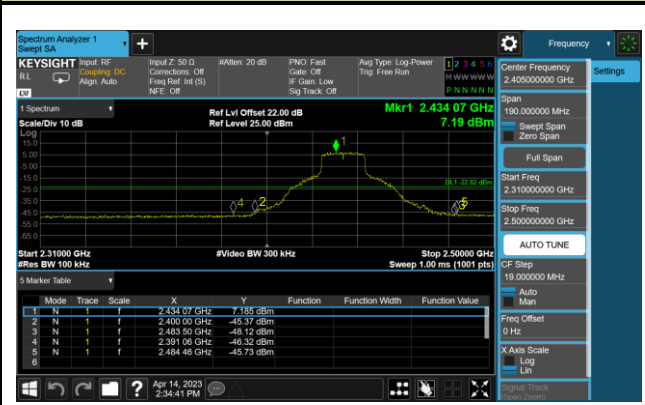


802.11 n20 CH06 (2437MHz)

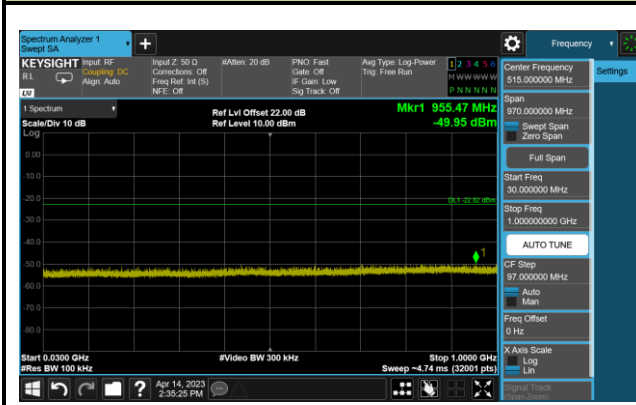

802.11 n20 CH06 (2437MHz)

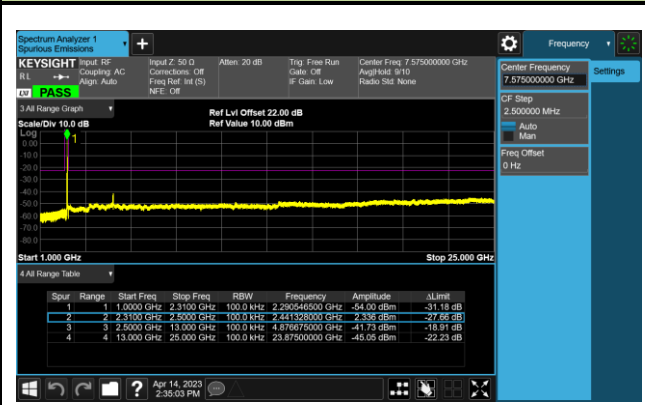


802.11 n20 CH11 (2462MHz)

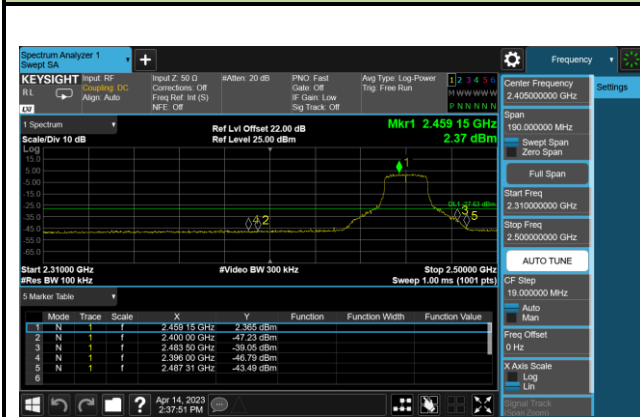


802.11 n20 CH11 (2462MHz)



802.11 n20 CH11 (2462MHz)

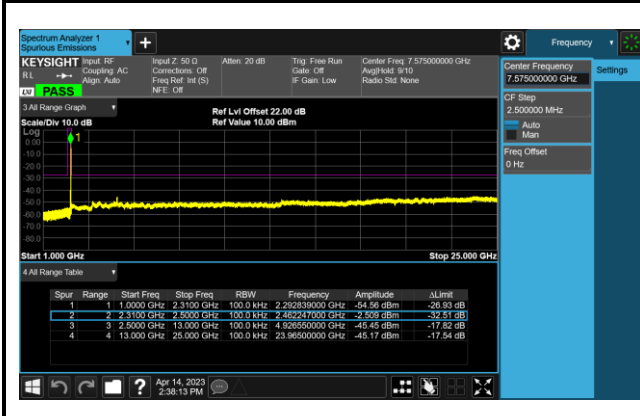


802.11 n40 CH03 (2422MHz)

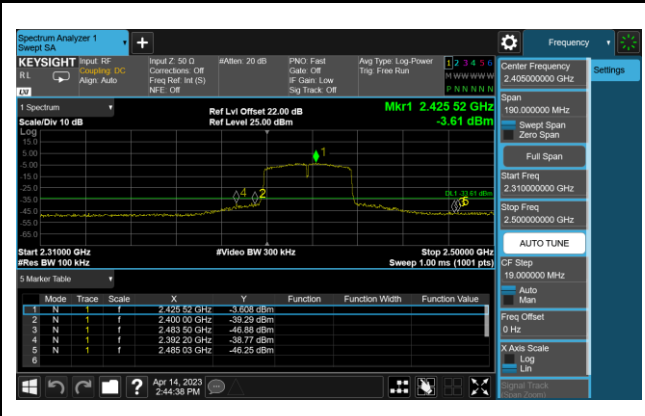

802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

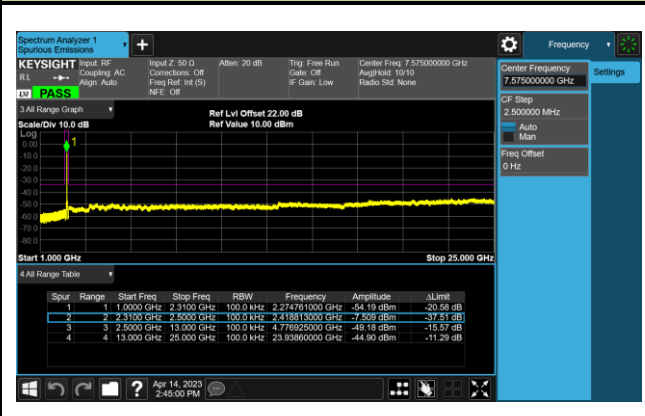


802.11 n40 CH06 (2437MHz)




802.11 n40 CH06 (2437MHz)

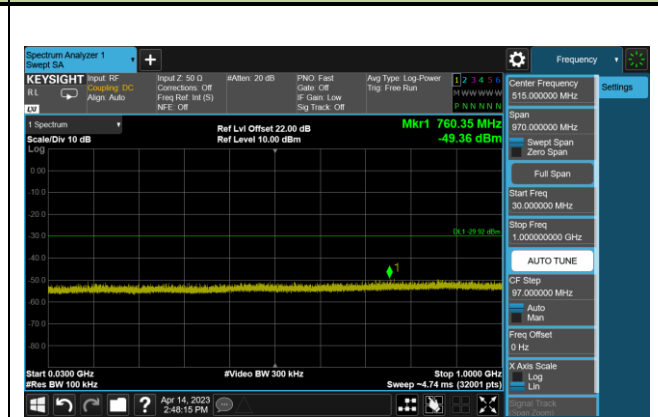

802.11 n40 CH06 (2437MHz)

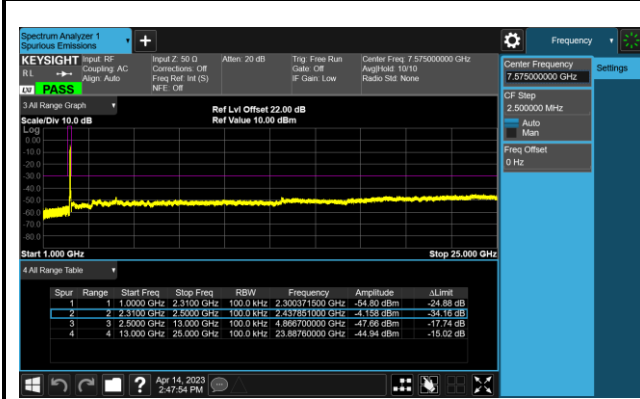


802.11 n40 CH09 (2452MHz)

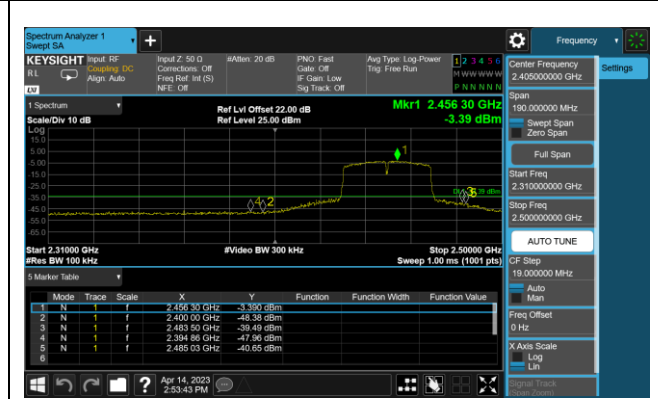

802.11 n40 CH09 (2452MHz)



802.11 n40 CH09 (2452MHz)

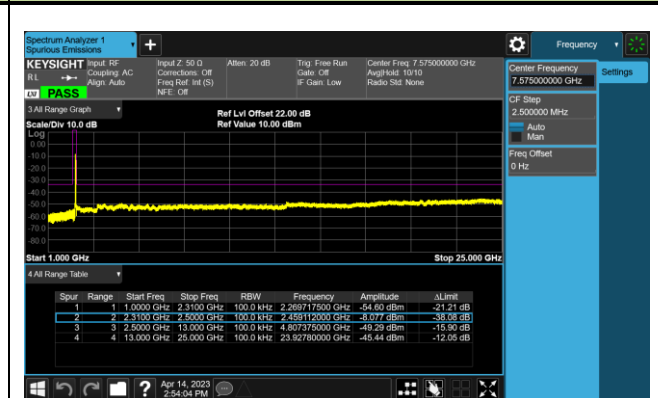

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

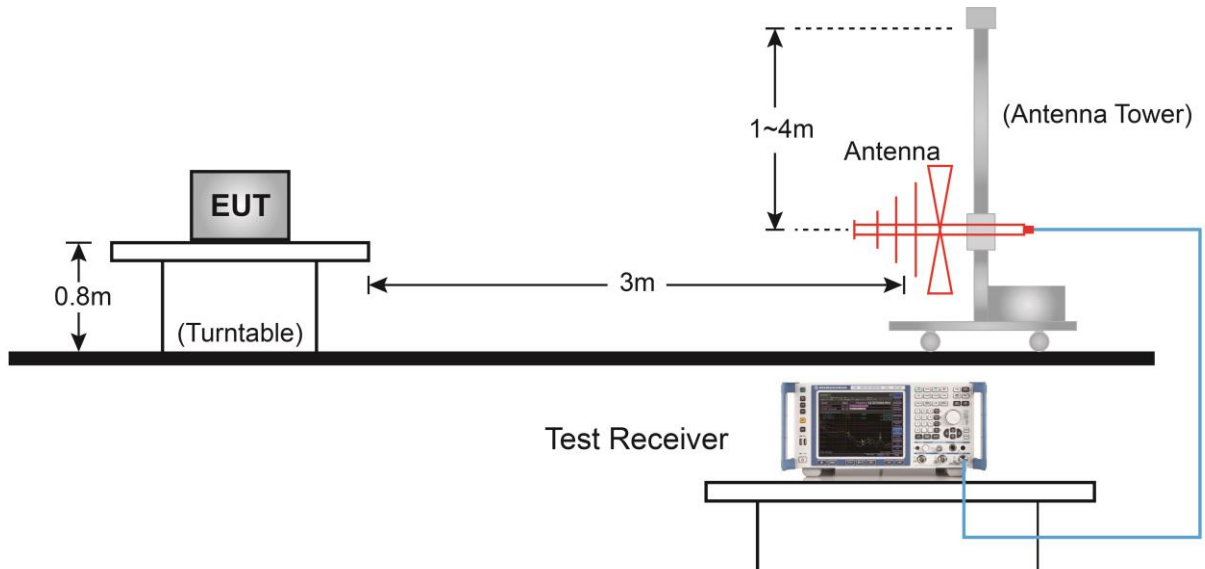


Above 1GHz Test Setup:

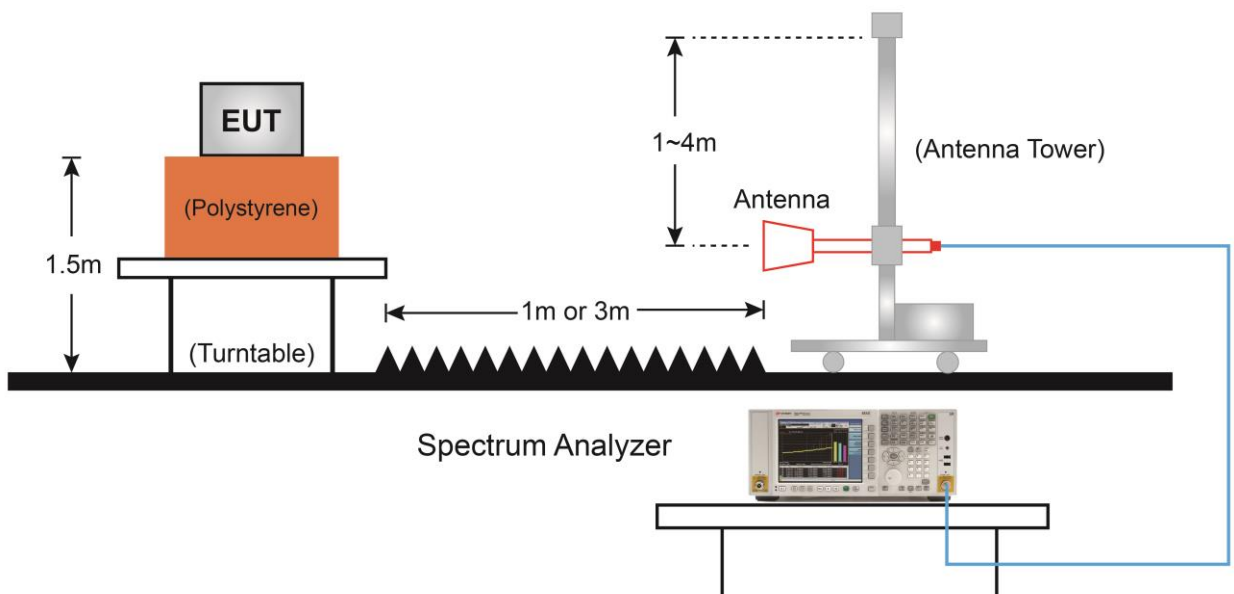

7.6.5. Test Result

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-11
Factor	VULB 9162	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

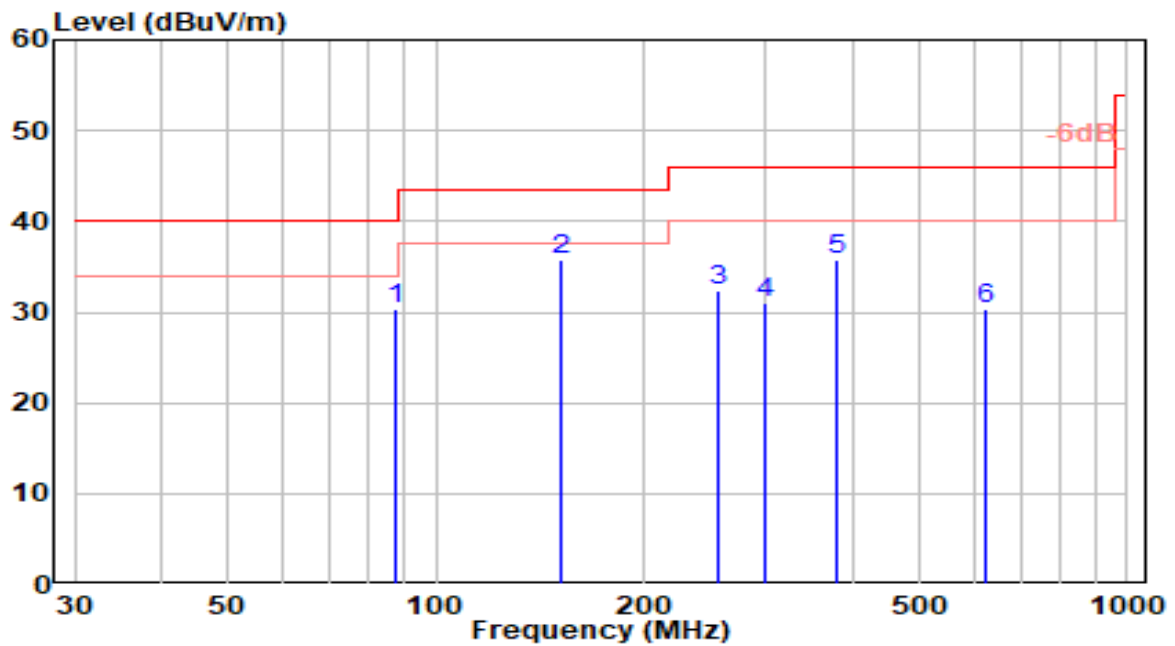


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	87.700	14.42	15.94	30.36	-9.64	40.00	100	-7	QP
2	* 151.090	20.76	15.01	35.78	-7.72	43.50	200	125	QP
3	256.270	12.33	19.95	32.27	-13.73	46.00	100	113	QP
4	298.650	10.59	20.46	31.05	-14.95	46.00	200	111	QP
5	379.920	12.97	22.78	35.75	-10.25	46.00	150	56	QP
6	622.900	3.39	26.92	30.31	-15.69	46.00	150	342	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-11
Factor	VULB 9162	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

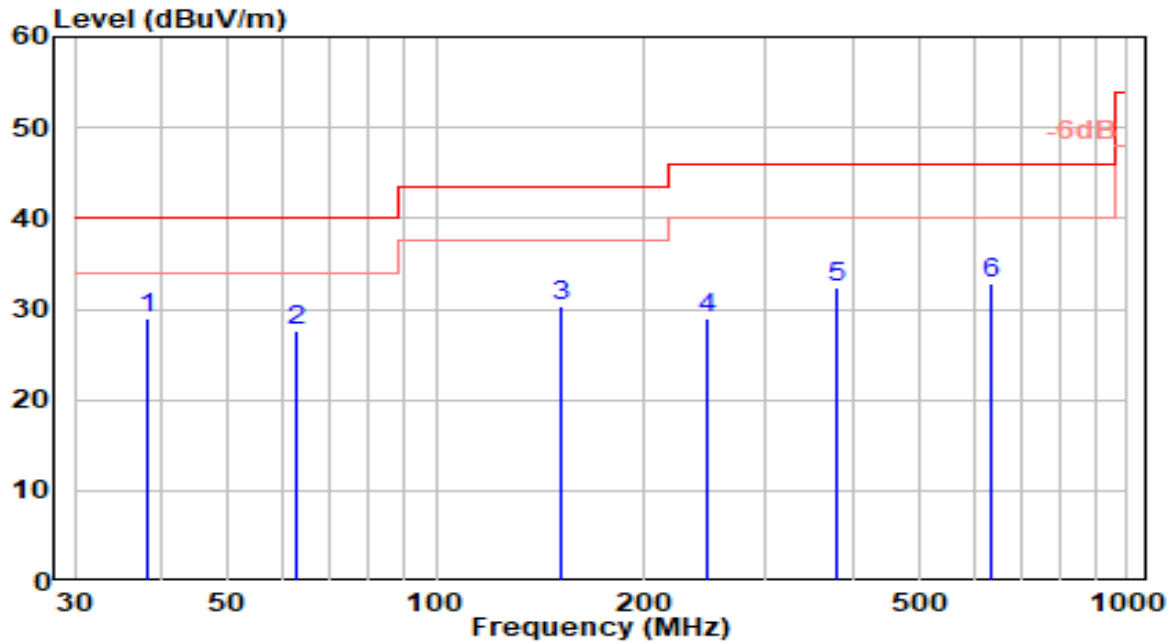


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	38.230	10.26	18.67	28.94	-11.06	40.00	100	317	QP
2		62.820	9.44	18.10	27.54	-12.46	40.00	200	181	QP
3		151.510	15.42	15.04	30.45	-13.05	43.50	200	226	QP
4		246.270	9.32	19.71	29.03	-16.97	46.00	150	136	QP
5		379.920	9.63	22.78	32.41	-13.59	46.00	150	328	QP
6		637.450	5.84	26.94	32.78	-13.22	46.00	100	146	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

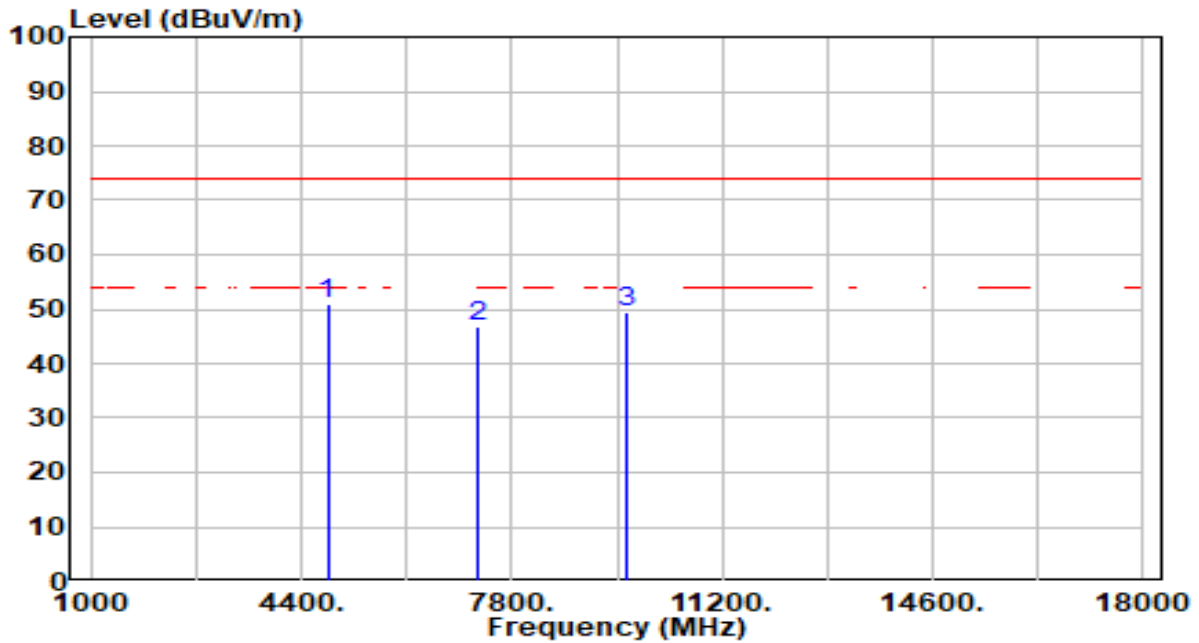


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	52.34	-1.23	51.11	-22.89	74.00	300	321	Peak
2		7236.000	42.54	4.16	46.70	-27.30	74.00	100	45	Peak
3		9648.000	46.04	3.29	49.33	-24.67	74.00	300	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

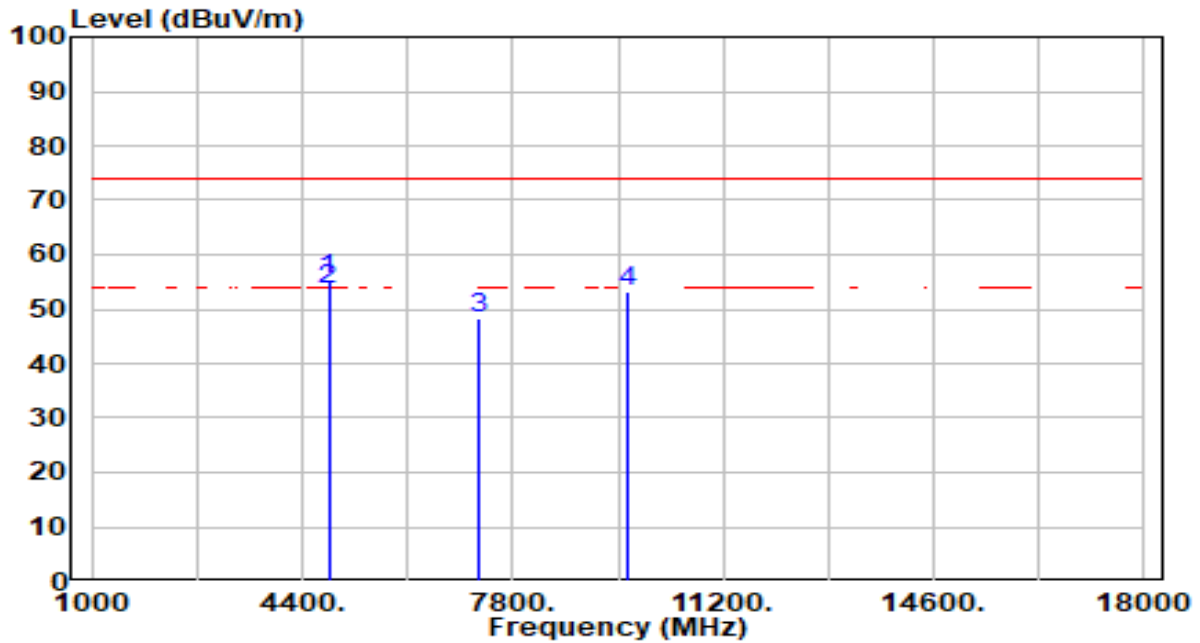


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	56.73	-1.23	55.50	-18.50	74.00	344	0	Peak
2	*	4824.000	54.96	-1.23	53.73	-0.27	54.00	344	0	Average
3		7236.000	44.04	4.16	48.20	-25.80	74.00	300	360	Peak
4		9648.000	49.88	3.29	53.17	-20.83	74.00	300	270	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

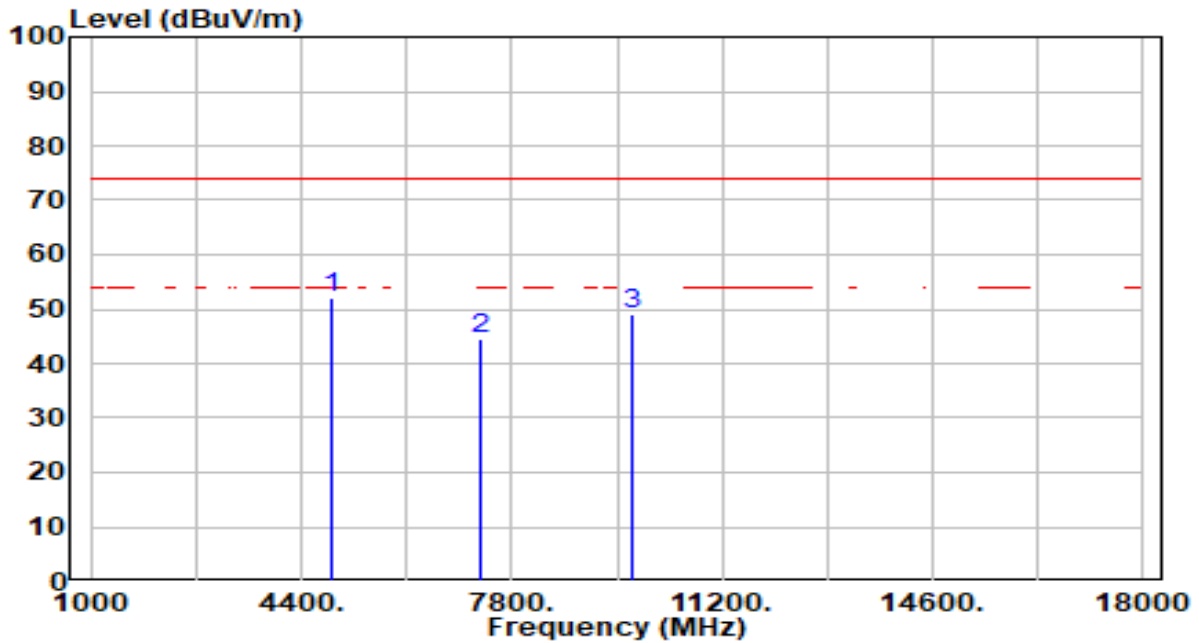


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	53.35	-1.13	52.23	-21.77	74.00	300	331	Peak
2		7311.000	40.30	4.14	44.43	-29.57	74.00	300	169	Peak
3		9748.000	45.73	3.33	49.05	-24.95	74.00	300	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

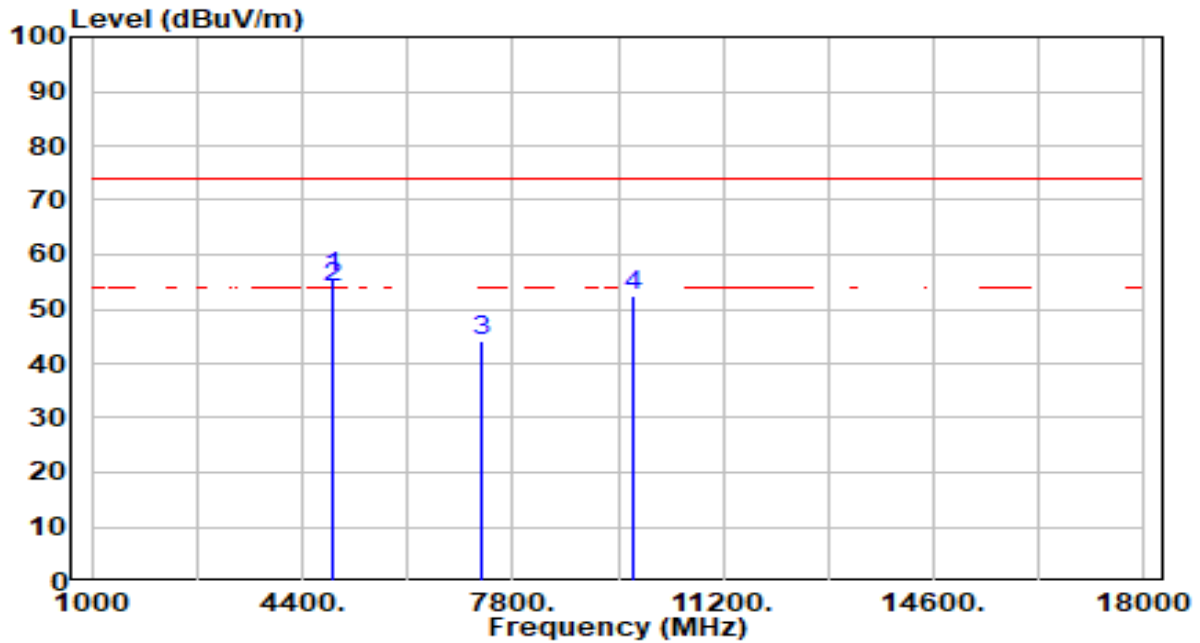


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	56.80	-1.13	55.67	-18.33	74.00	357	360	Peak
2	*	4874.000	54.94	-1.13	53.81	-0.19	54.00	357	360	Average
3		7311.000	39.87	4.14	44.01	-29.99	74.00	300	0	Peak
4		9748.000	49.29	3.33	52.62	-21.38	74.00	300	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

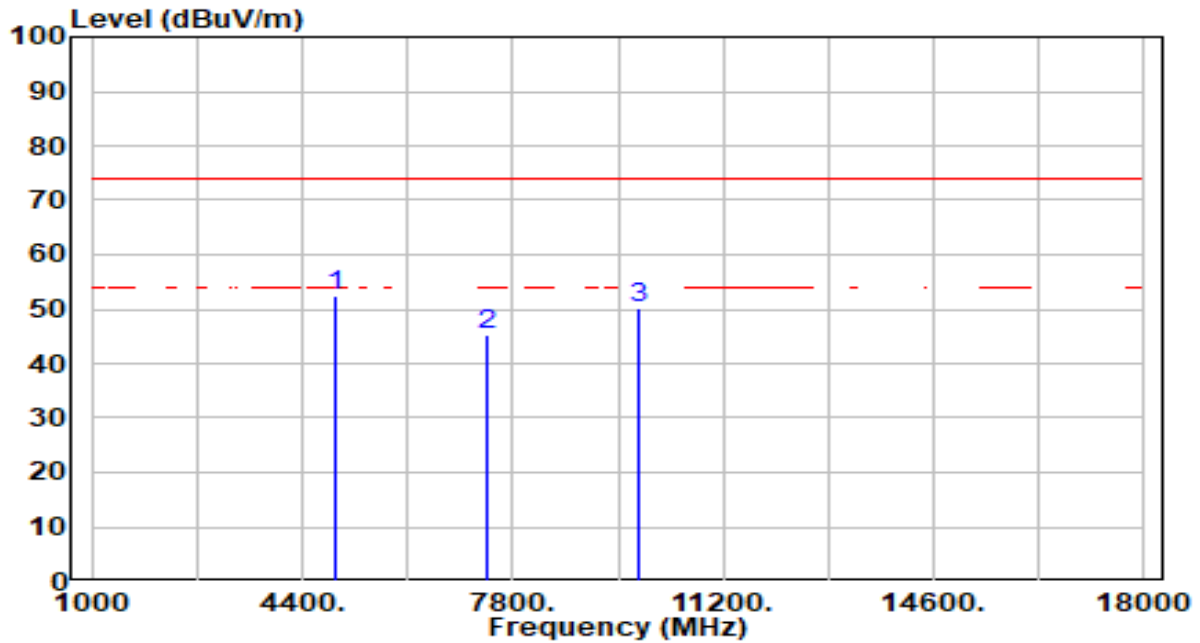


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.44	-1.03	52.41	-21.59	74.00	300	351	Peak
2		40.98	4.11	45.10	-28.90	74.00	100	146	Peak
3		46.79	3.39	50.18	-23.82	74.00	300	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

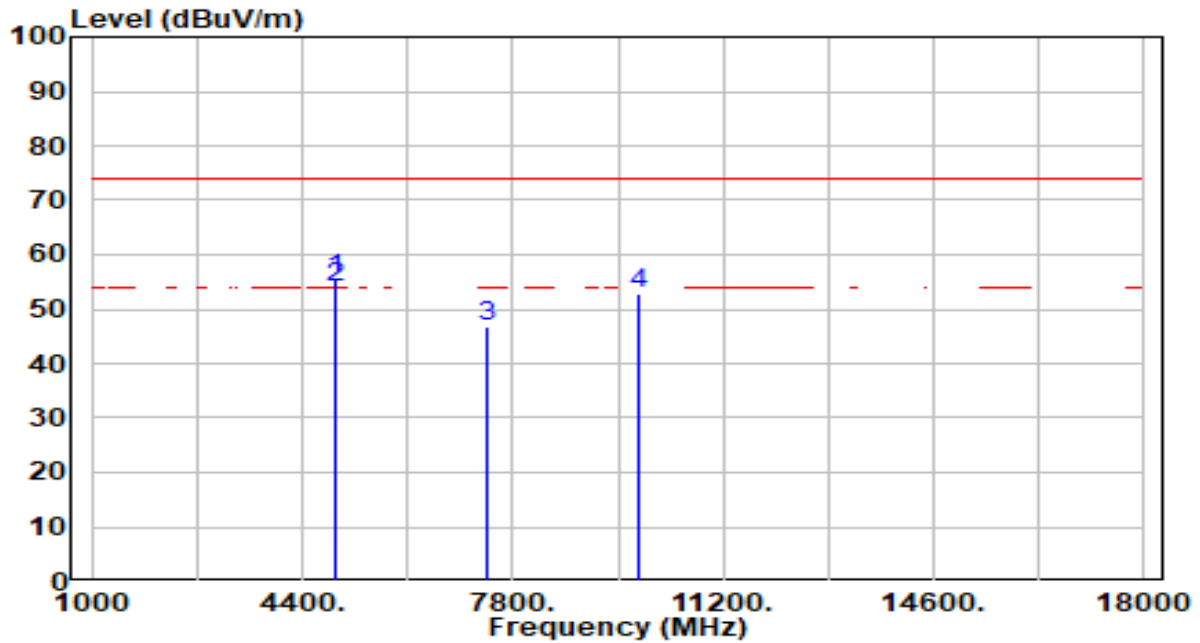


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4924.000	56.67	-1.03	55.64	-18.36	74.00	373	360	Peak
2	* 4924.000	54.94	-1.03	53.91	-0.09	54.00	373	360	Average
3	7386.000	42.71	4.11	46.82	-27.18	74.00	300	360	Peak
4	9848.000	49.28	3.39	52.67	-21.33	74.00	300	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

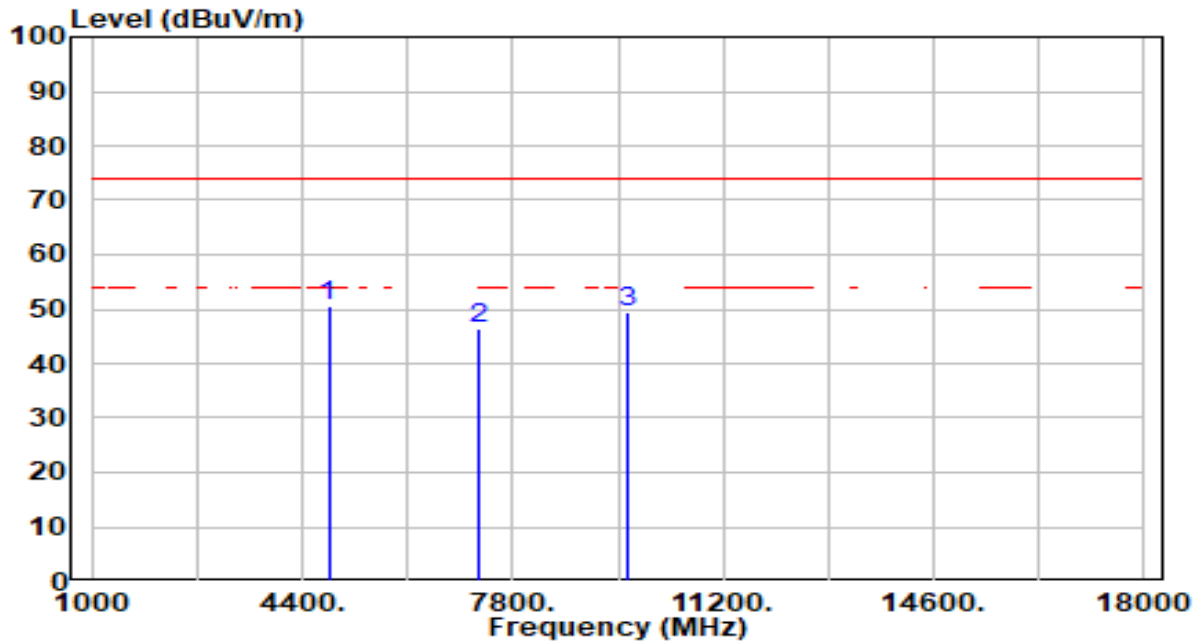


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	51.73	-1.23	50.51	-23.49	74.00	300	328	Peak
2		7236.000	42.17	4.16	46.33	-27.67	74.00	100	41	Peak
3		9648.000	46.16	3.29	49.44	-24.56	74.00	300	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

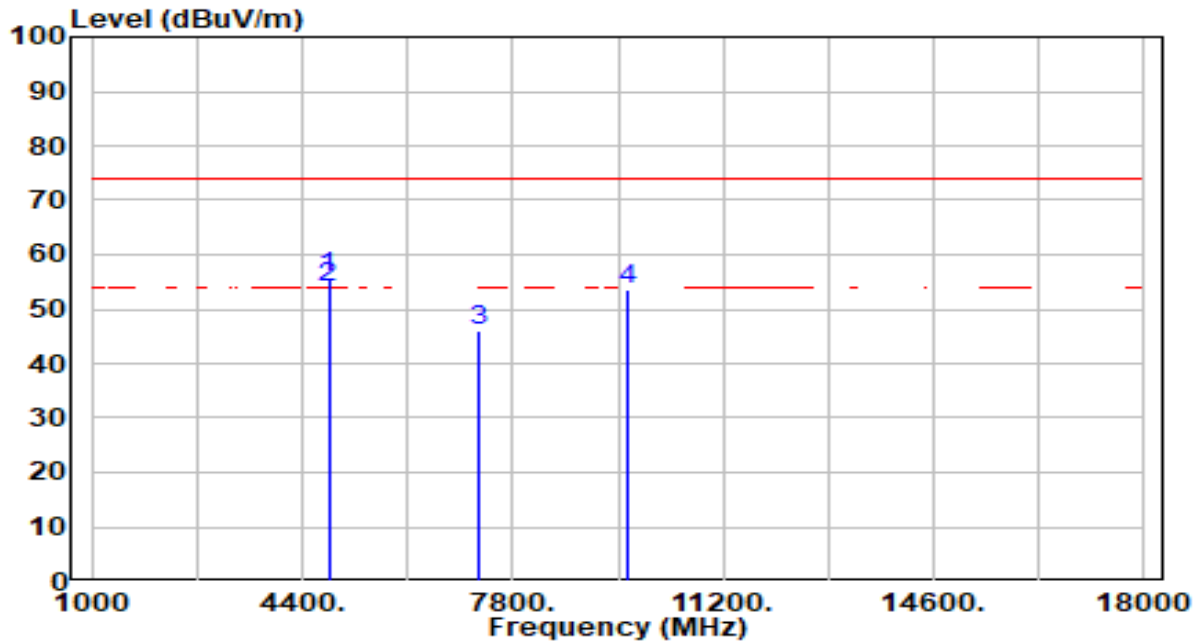


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	57.05	-1.23	55.82	-18.18	74.00	327	253	Peak
2	*	4824.000	55.14	-1.23	53.91	-0.09	54.00	327	253	Average
3		7236.000	41.90	4.16	46.06	-27.94	74.00	300	360	Peak
4		9648.000	50.11	3.29	53.40	-20.60	74.00	300	272	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

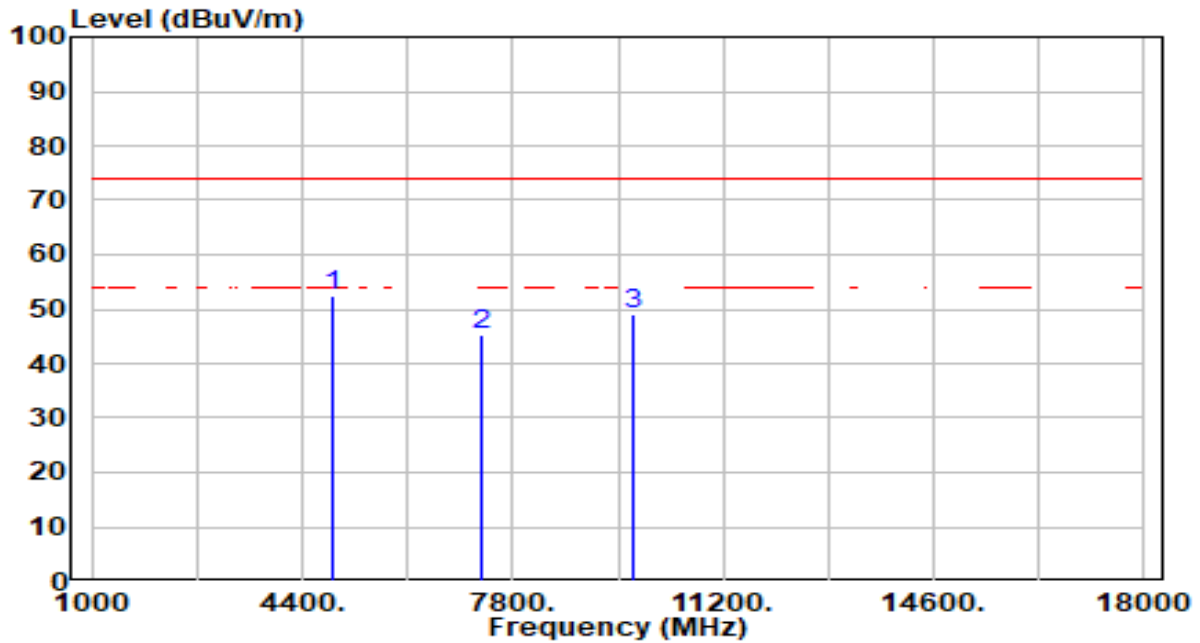


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	53.67	-1.13	52.54	-21.46	74.00	300	343	Peak
2		7311.000	41.33	4.14	45.47	-28.53	74.00	100	32	Peak
3		9748.000	45.89	3.33	49.22	-24.78	74.00	300	170	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

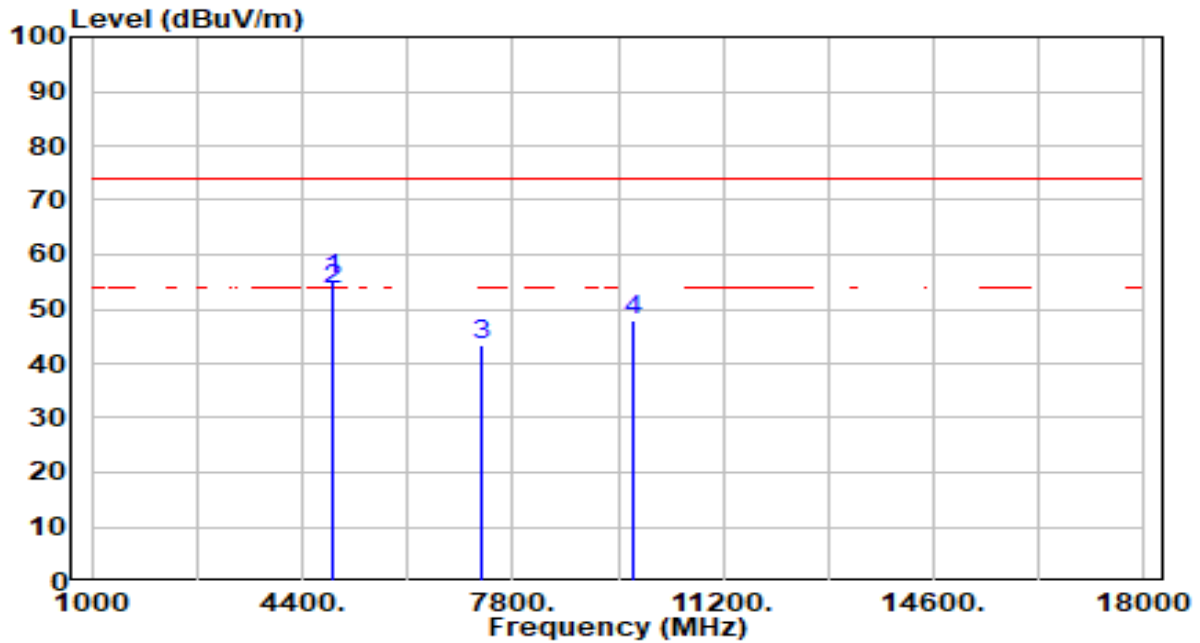


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4874.000	56.68	-1.13	55.55	-18.45	74.00	364	341	Peak
2	* 4874.000	54.83	-1.13	53.70	-0.30	54.00	364	341	Average
3	7311.000	39.30	4.14	43.43	-30.57	74.00	300	337	Peak
4	9748.000	44.46	3.33	47.79	-26.21	74.00	300	166	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

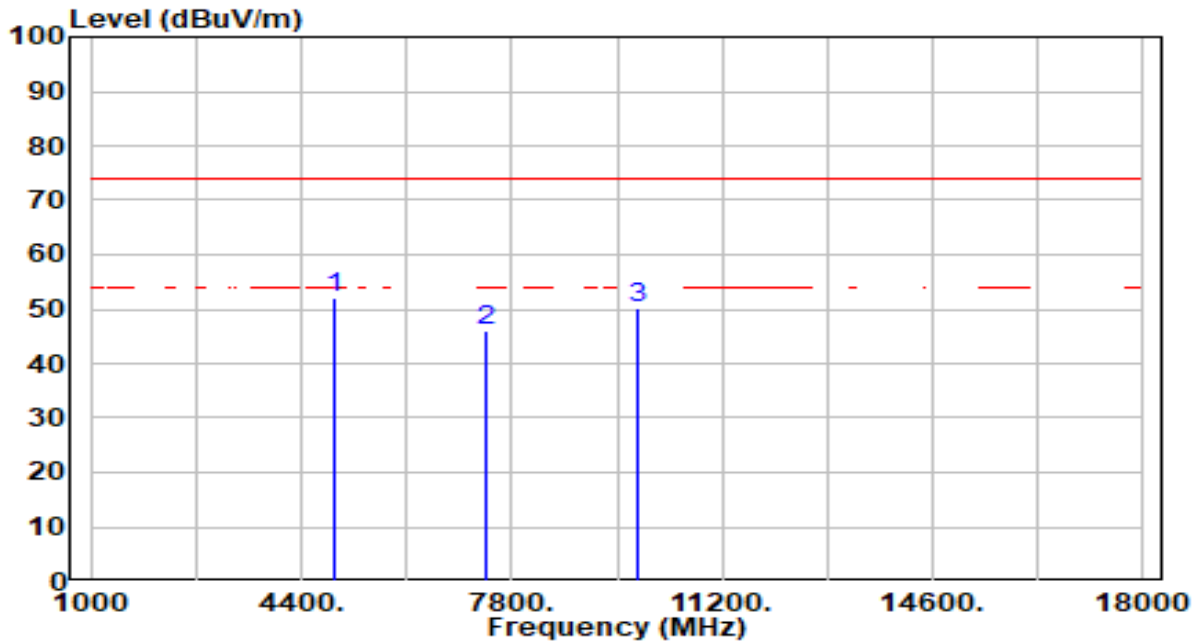


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.14	-1.03	52.12	-21.88	74.00	300	346	Peak
2		41.95	4.11	46.06	-27.94	74.00	100	334	Peak
3		46.84	3.39	50.23	-23.77	74.00	300	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

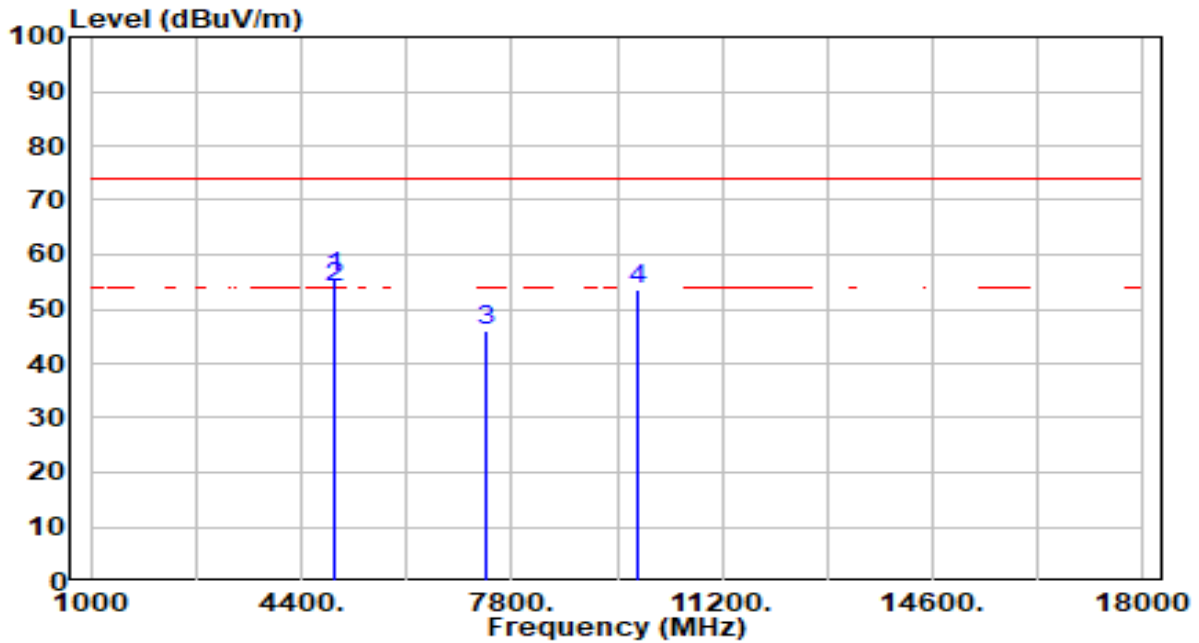


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4924.000	56.76	-1.03	55.73	-18.27	74.00	372	360	Peak
2	*	4924.000	54.90	-1.03	53.87	-0.13	54.00	372	360	Average
3		7386.000	41.79	4.11	45.90	-28.10	74.00	300	360	Peak
4		9848.000	50.10	3.39	53.49	-20.51	74.00	300	175	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

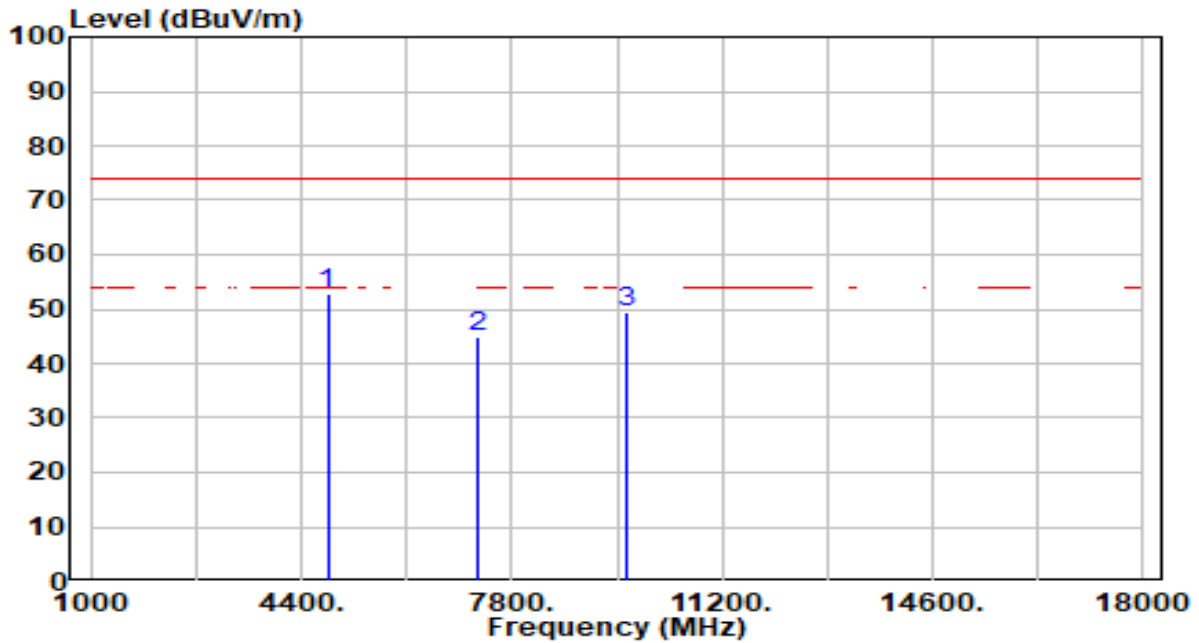


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	54.11	-1.23	52.88	-21.12	74.00	300	349	Peak
2		40.83	4.16	44.99	-29.01	74.00	100	45	Peak
3		46.18	3.29	49.47	-24.53	74.00	300	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

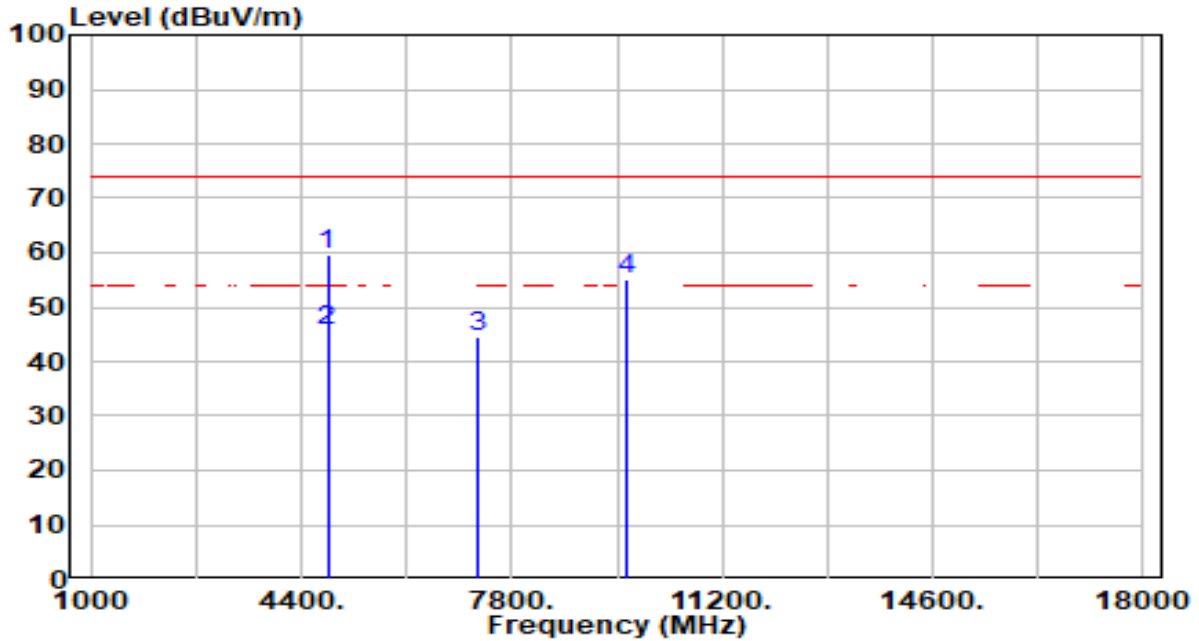


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	60.71	-1.23	59.48	-14.52	74.00	360	249	Peak
2	*	4824.000	46.74	-1.23	45.51	-8.49	54.00	360	249	Average
3		7236.000	40.35	4.16	44.51	-29.49	74.00	300	0	Peak
4		9648.000	51.76	3.29	55.05	-18.95	74.00	300	276	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

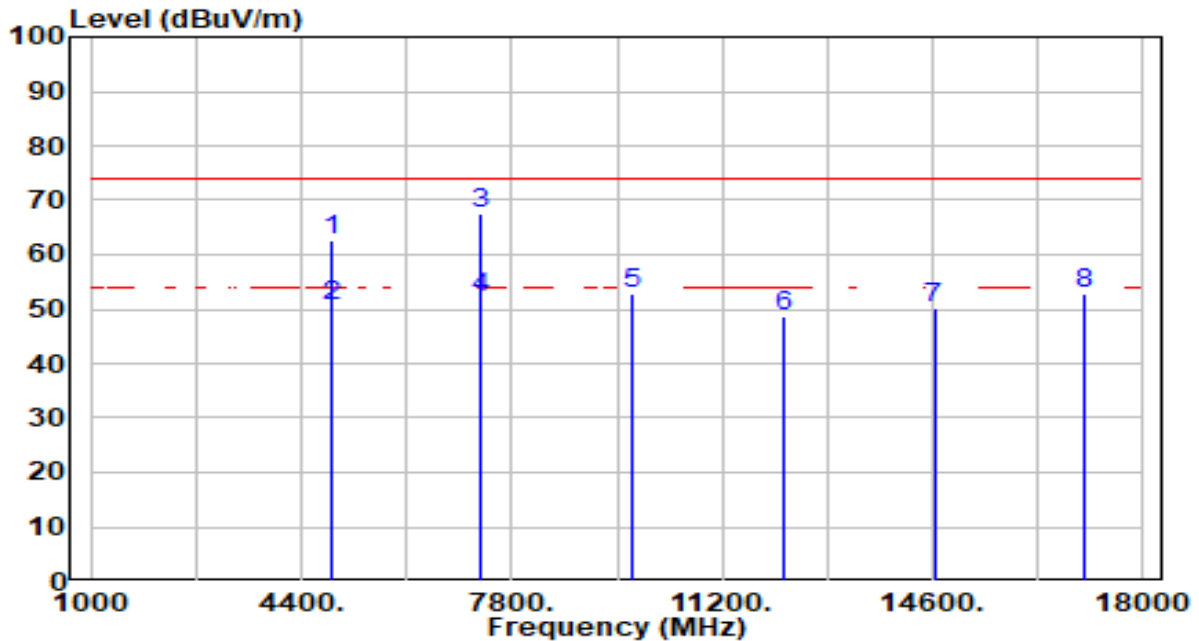


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	63.77	-1.13	62.64	-11.36	74.00	367	339	Peak
2	4874.000	51.54	-1.13	50.41	-3.59	54.00	367	339	Average
3	* 7311.000	63.32	4.14	67.46	-6.54	74.00	100	38	Peak
4	* 7311.000	47.94	4.14	52.08	-1.92	54.00	100	38	Average
5	9748.000	49.49	3.33	52.82	-21.18	74.00	300	159	Peak
6	12185.000	44.17	4.38	48.55	-25.45	74.00	300	78	Peak
7	14622.000	45.08	5.00	50.09	-23.91	74.00	300	306	Peak
8	17059.000	48.37	4.61	52.98	-21.02	74.00	300	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 110V/60Hz

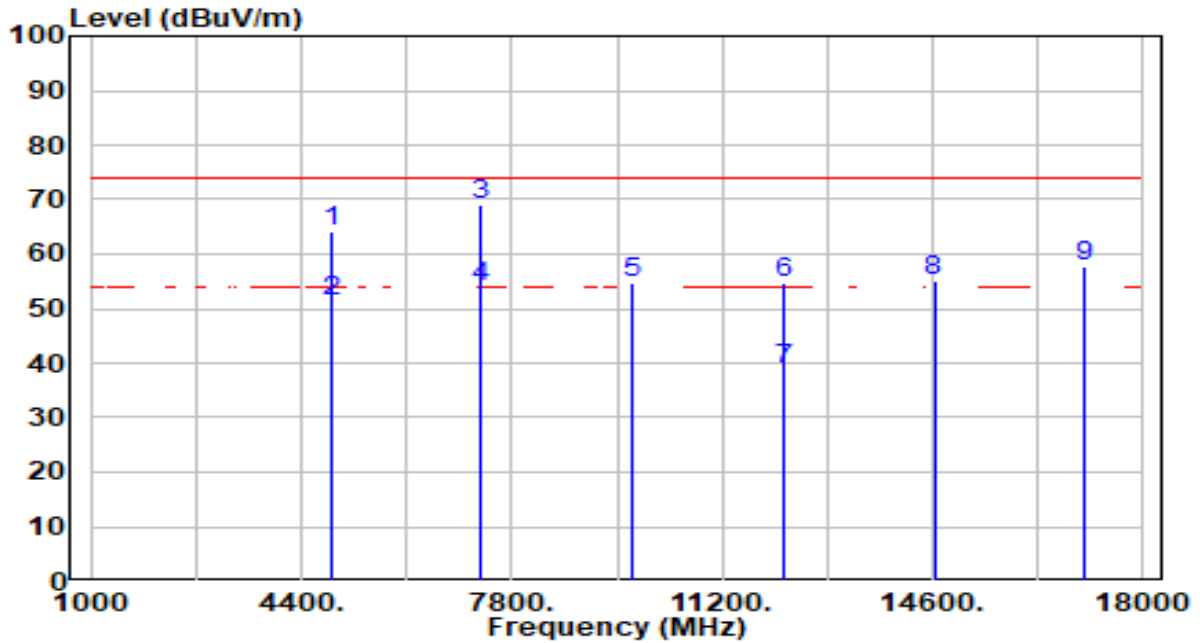


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	65.10	-1.13	63.97	-10.03	74.00	380	360	Peak
2	4874.000	52.55	-1.13	51.42	-2.58	54.00	380	360	Average
3 *	7311.000	65.05	4.14	69.19	-4.81	74.00	291	360	Peak
4 *	7311.000	49.76	4.14	53.90	-0.10	54.00	291	360	Average
5	9748.000	51.51	3.33	54.84	-19.16	74.00	300	144	Peak
6	12185.000	50.31	4.38	54.70	-19.30	74.00	300	68	Peak
7	12185.000	34.30	4.38	38.68	-15.32	54.00	300	68	Average
8	14622.000	50.18	5.00	55.18	-18.82	74.00	300	103	Peak
9	17059.000	52.94	4.61	57.55	-16.45	74.00	300	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

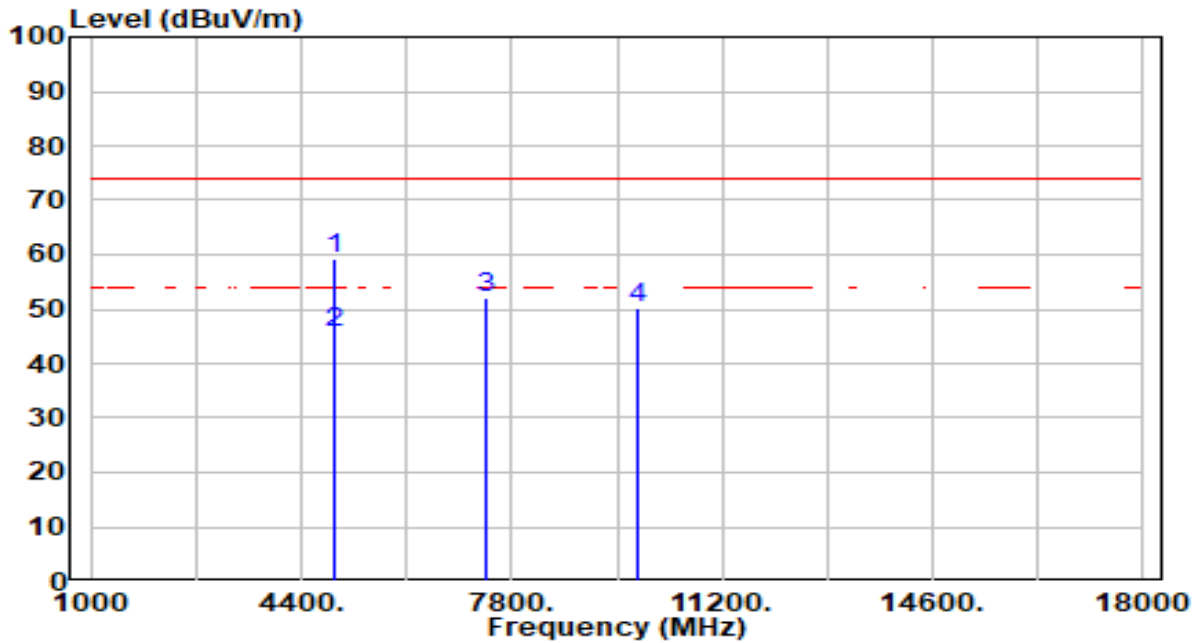


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4924.000	60.41	-1.03	59.38	-14.62	74.00	400	347	Peak
2	*	4924.000	46.58	-1.03	45.55	-8.45	54.00	400	347	Average
3		7386.000	47.87	4.11	51.98	-22.02	74.00	100	41	Peak
4		9848.000	46.82	3.39	50.21	-23.79	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

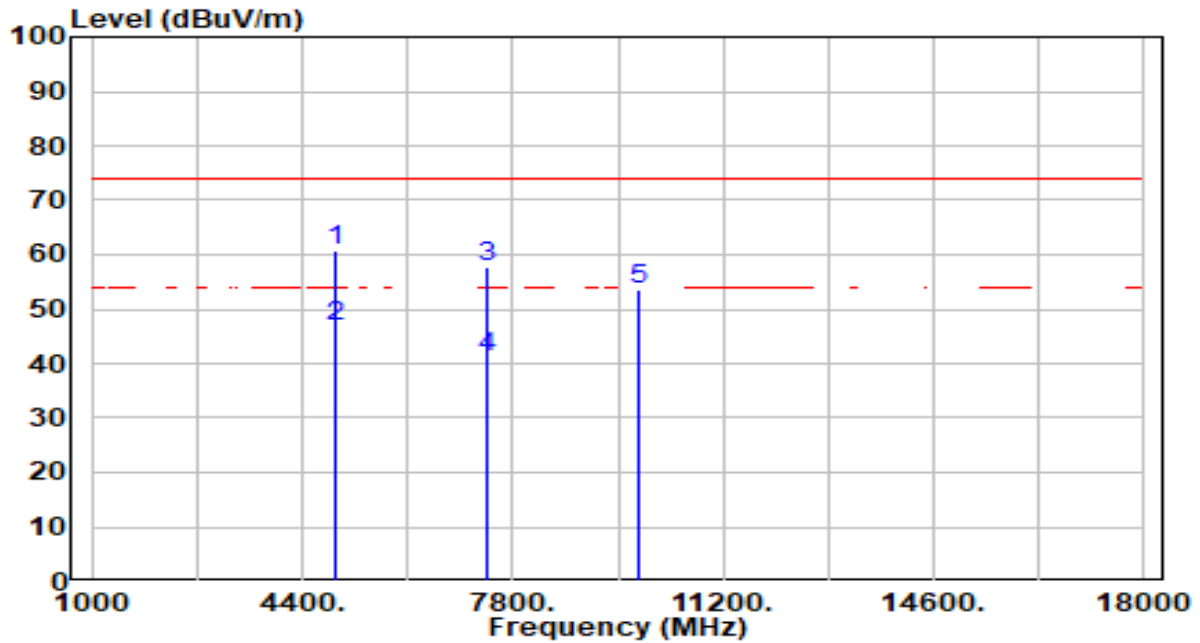


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4924.000	61.63	-1.03	60.60	-13.40	74.00	352	360	Peak
2	* 4924.000	47.77	-1.03	46.74	-7.26	54.00	352	360	Average
3	7386.000	53.72	4.11	57.83	-16.17	74.00	317	360	Peak
4	7386.000	37.19	4.11	41.30	-12.70	54.00	317	360	Average
5	9848.000	50.02	3.39	53.41	-20.59	74.00	300	177	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

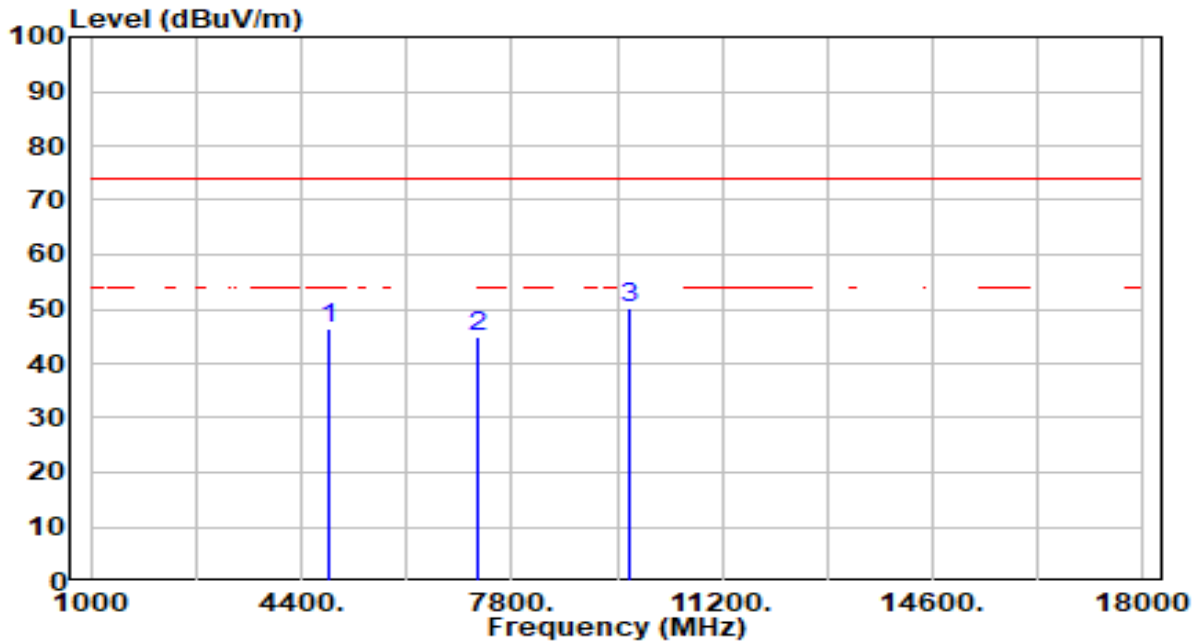


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	47.57	-1.19	46.38	-27.62	74.00	300	354	Peak
2	7266.000	40.63	4.15	44.78	-29.22	74.00	300	268	Peak
3	* 9688.000	46.94	3.30	50.25	-23.75	74.00	300	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

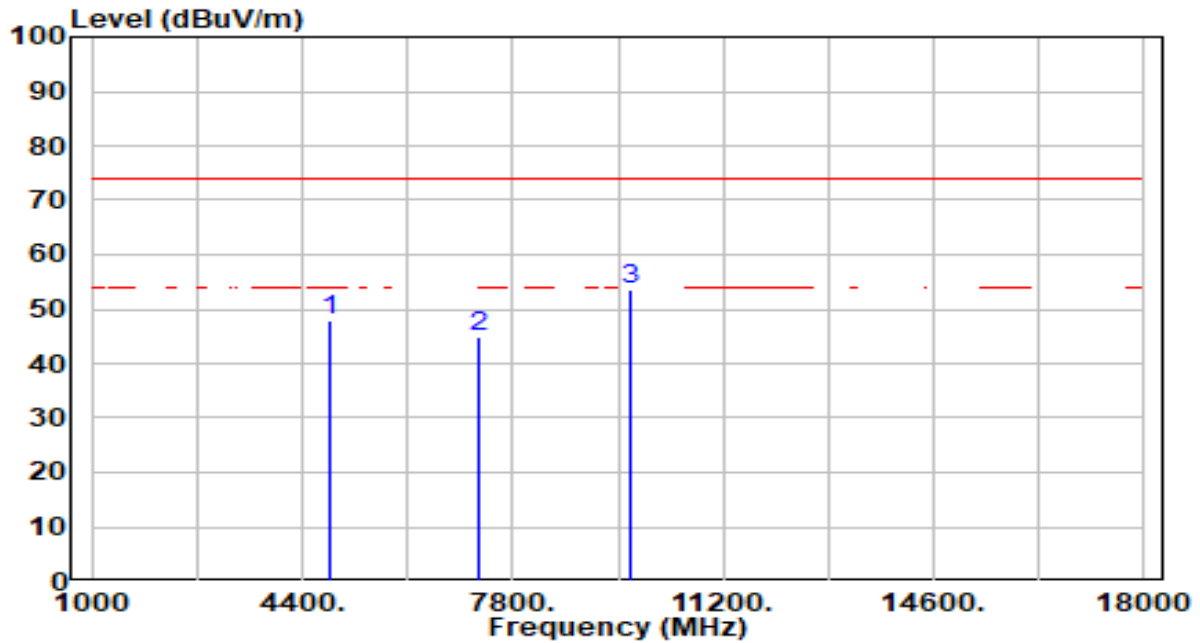


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	49.18	-1.19	48.00	-26.00	74.00	300	250	Peak
2	7266.000	40.83	4.15	44.98	-29.02	74.00	300	74	Peak
3	* 9688.000	50.45	3.30	53.75	-20.25	74.00	300	271	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

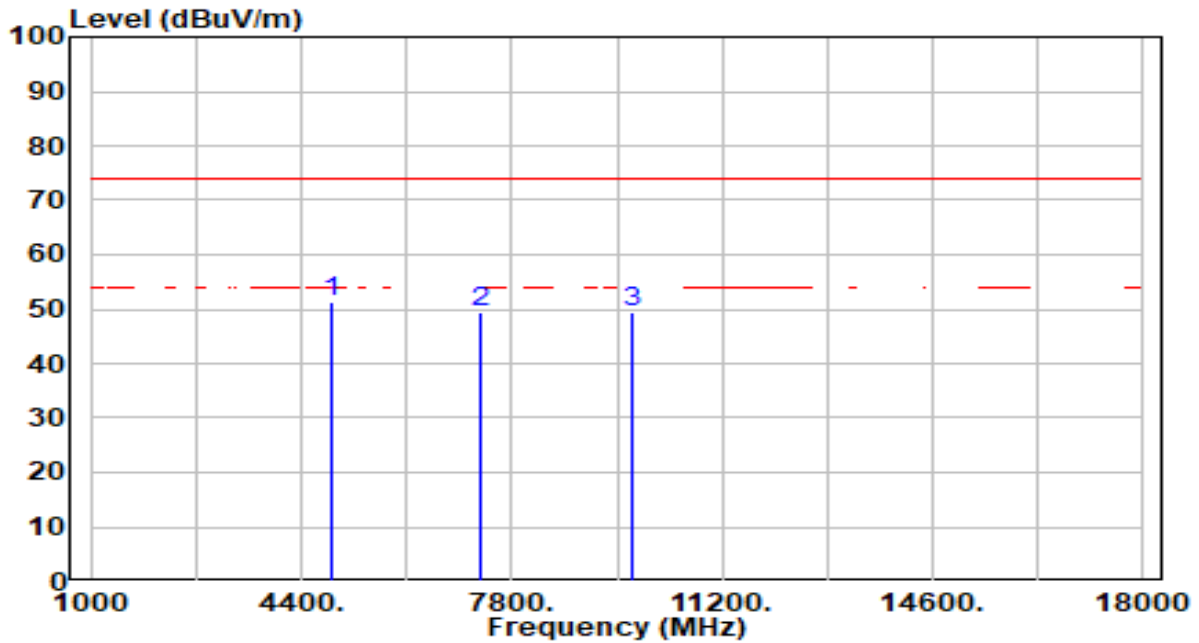


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4874.000	52.40	-1.13	51.27	-22.73	74.00	300	347	Peak
2		7311.000	45.32	4.14	49.45	-24.55	74.00	100	40	Peak
3		9748.000	45.99	3.33	49.32	-24.68	74.00	100	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

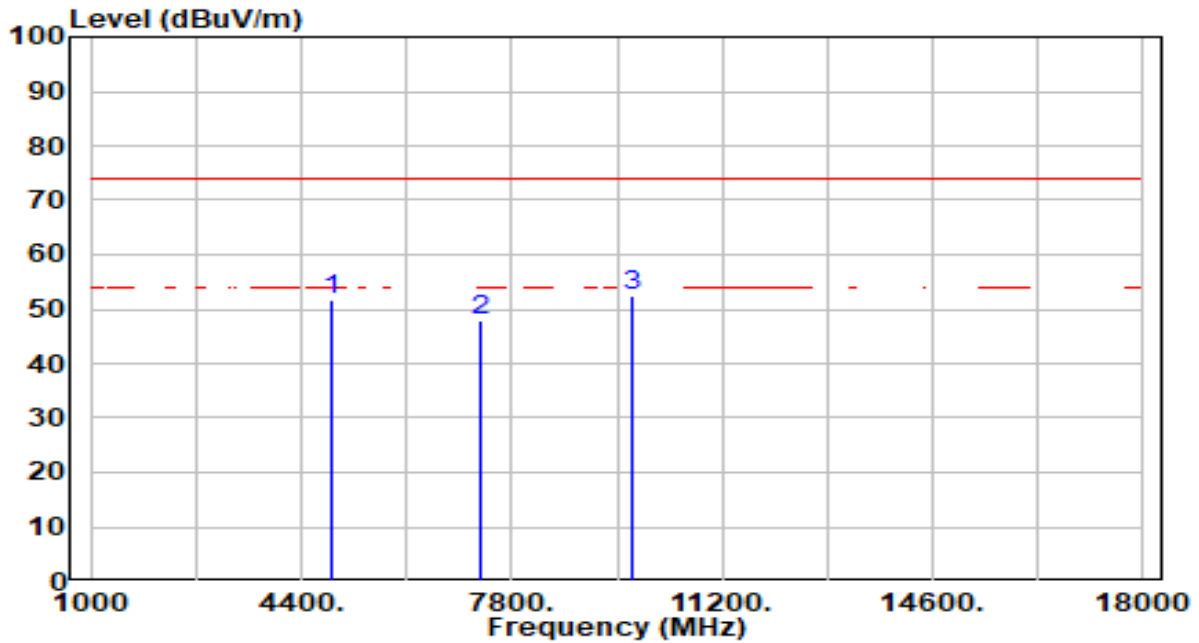


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	52.92	-1.13	51.79	-22.21	74.00	300	254	Peak
2	7311.000	43.89	4.14	48.02	-25.98	74.00	300	23	Peak
3	* 9748.000	49.21	3.33	52.54	-21.46	74.00	300	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

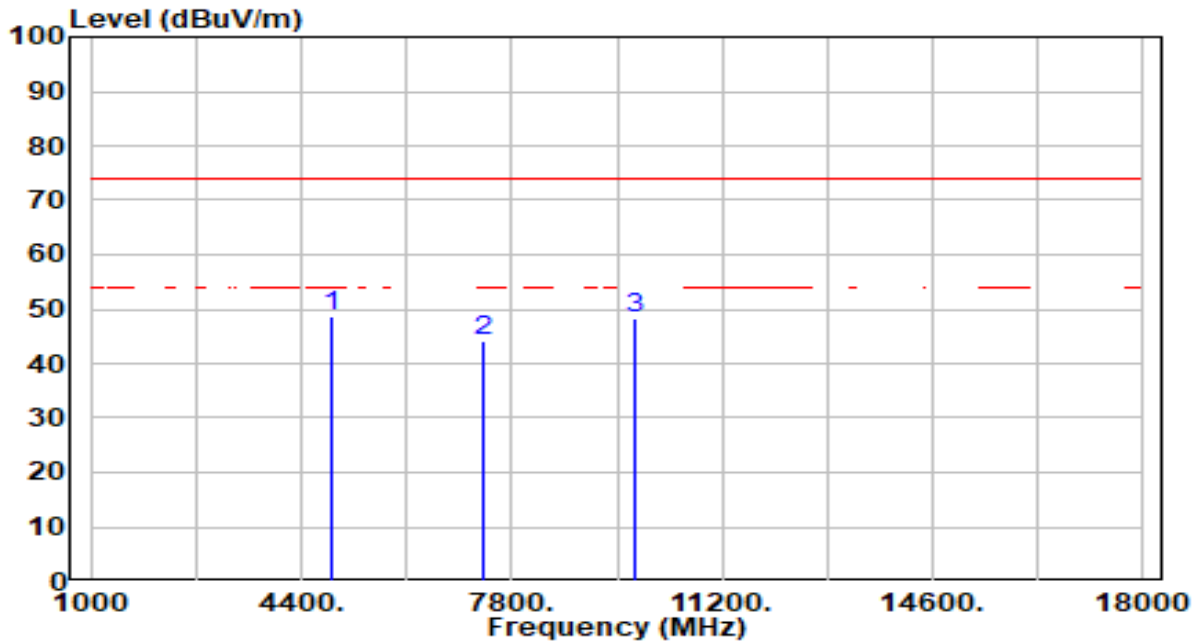


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	49.89	-1.07	48.83	-25.17	74.00	300	344	Peak
2		40.18	4.12	44.30	-29.70	74.00	300	246	Peak
3		44.93	3.35	48.29	-25.71	74.00	300	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

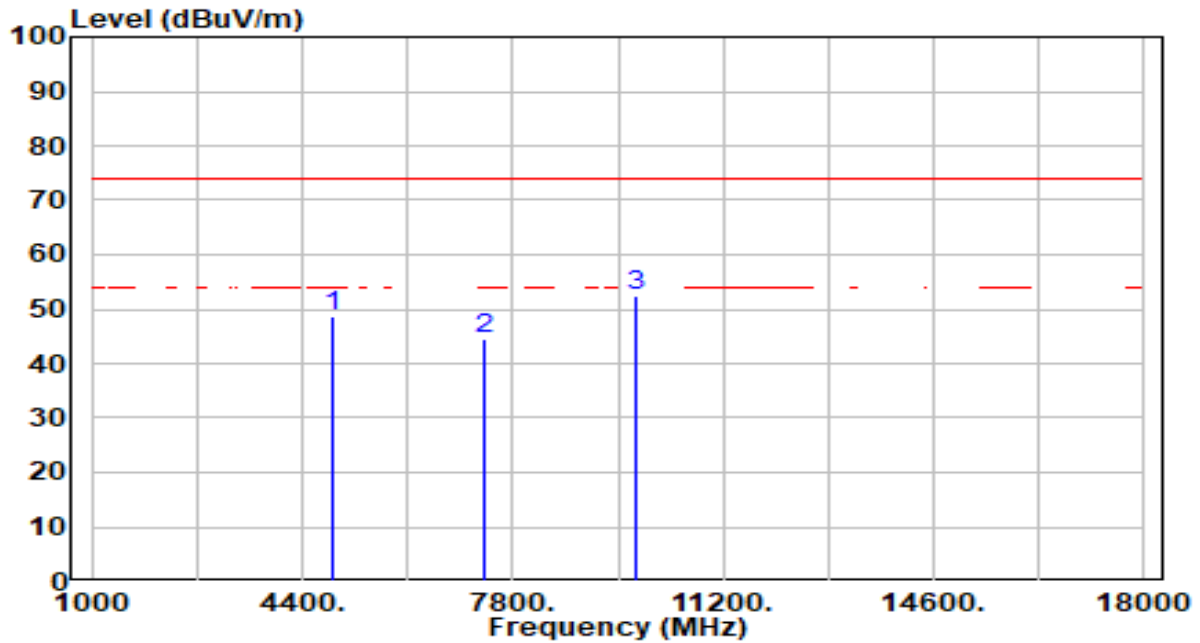

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	49.68	-1.07	48.61	-25.39	74.00	300	248	Peak
2	7356.000	40.41	4.12	44.53	-29.47	74.00	300	79	Peak
3	* 9808.000	49.03	3.35	52.38	-21.62	74.00	300	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

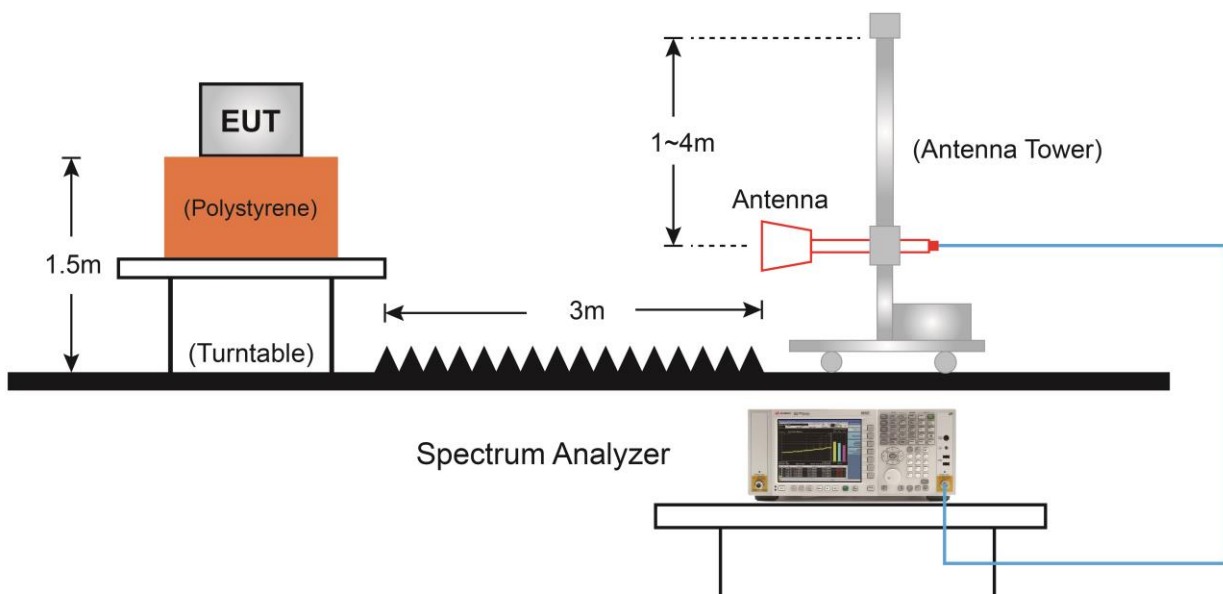

7.7.5. Test Result

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C / 61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

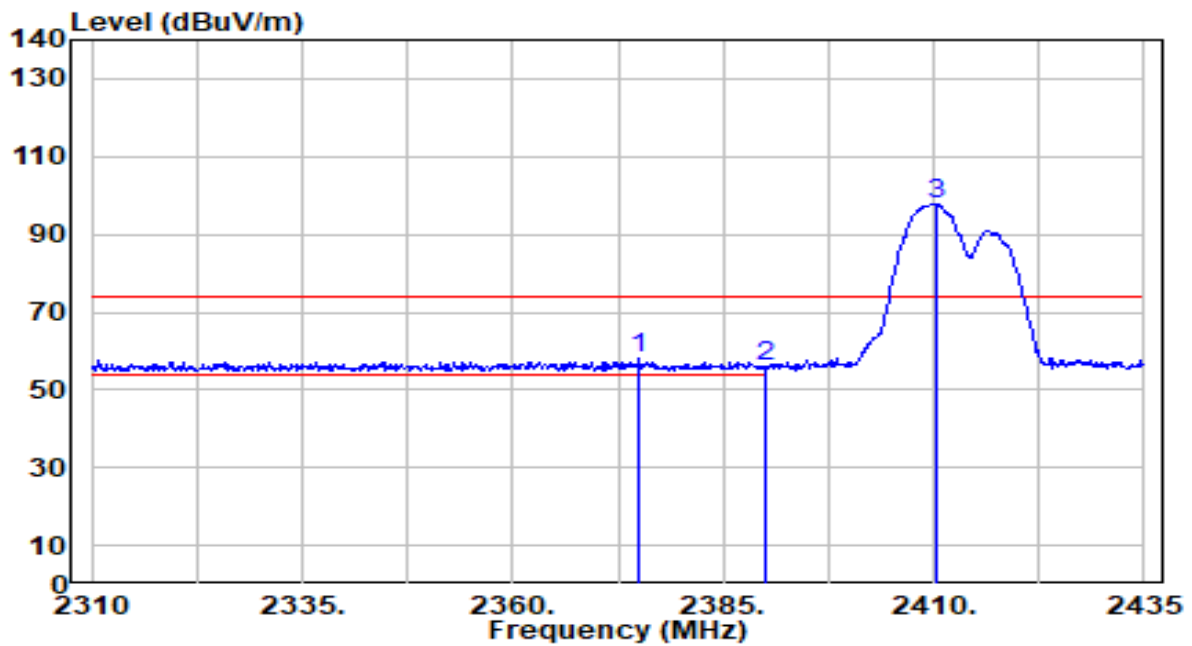


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2375.000	28.22	29.98	58.19	-15.81	74.00	261	253	Peak
2	2390.000	26.19	29.99	56.19	-17.81	74.00	261	253	Peak
3	2410.250	67.57	30.04	97.61	N/A	N/A	261	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

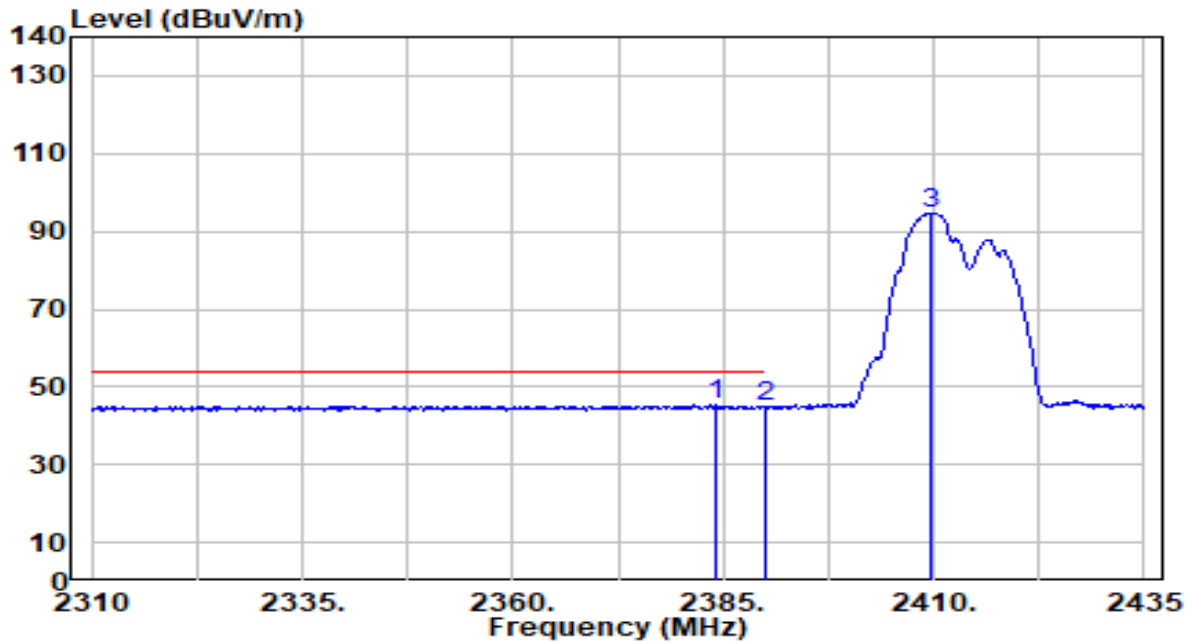


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2384.125	15.38	29.99	45.37	-8.63	54.00	261	253	Average
2		2390.000	14.78	29.99	44.78	-9.22	54.00	261	253	Average
3		2409.750	64.54	30.04	94.58	N/A	N/A	261	253	Average

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

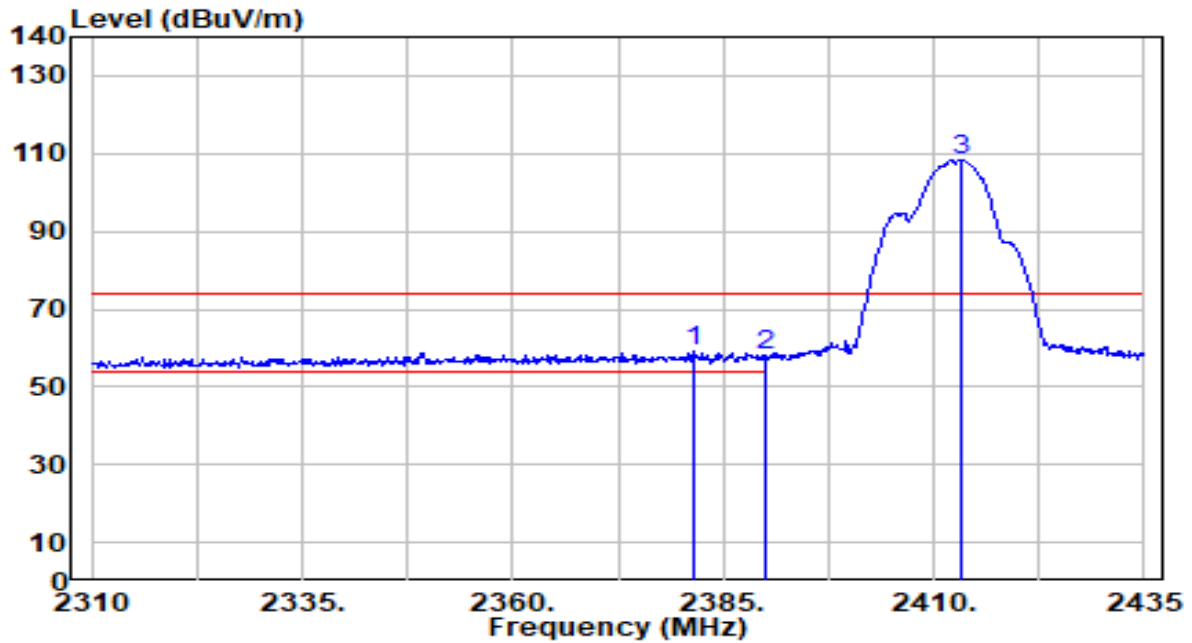


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2381.625	29.06	29.98	59.04	-14.96	74.00	200	334	Peak
2		2390.000	27.92	29.99	57.91	-16.09	74.00	200	334	Peak
3		2413.125	78.47	30.05	108.52	N/A	N/A	200	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

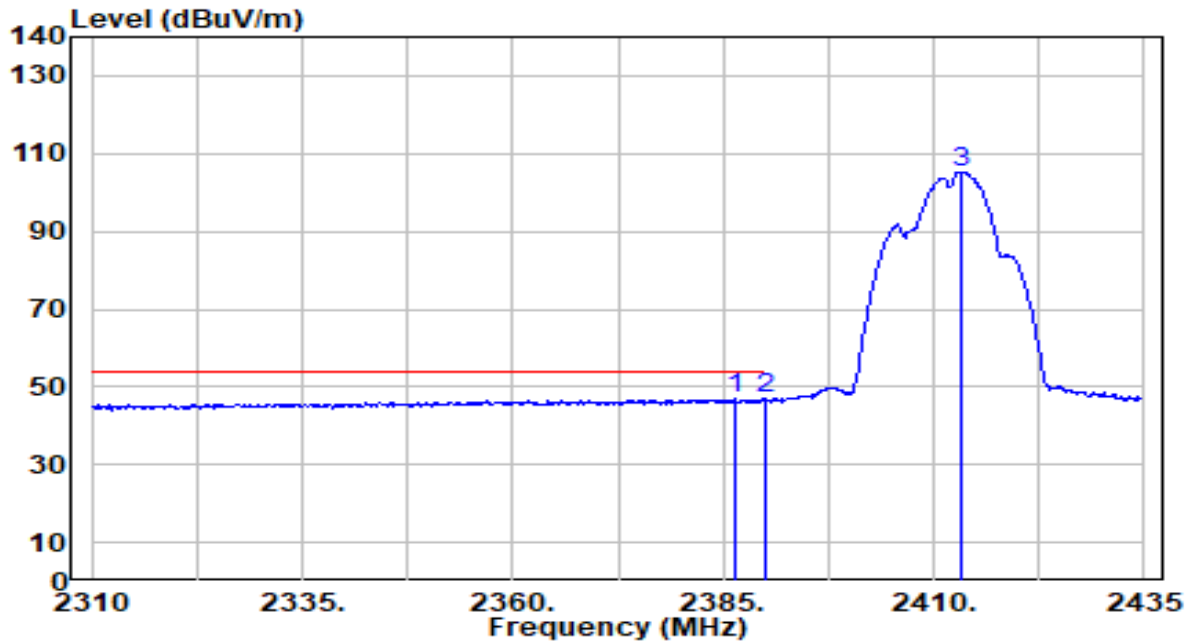


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.375	16.78	29.99	46.77	-7.23	54.00	200	334	Average
2	* 2390.000	16.80	29.99	46.80	-7.20	54.00	200	334	Average
3	2413.125	75.33	30.05	105.38	N/A	N/A	200	334	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

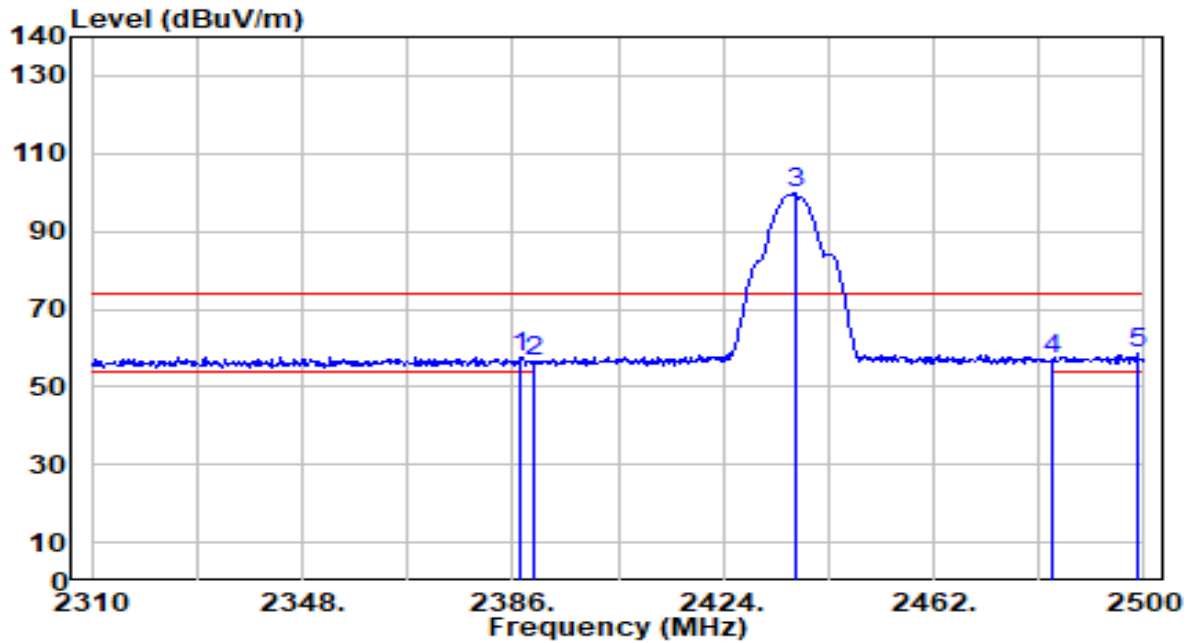


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	27.81	29.99	57.80	-16.20	74.00	162	120	Peak
2	2390.000	26.30	29.99	56.29	-17.71	74.00	162	120	Peak
3	2436.920	69.53	30.13	99.66	N/A	N/A	162	120	Peak
4	2483.500	27.03	30.29	57.32	-16.68	74.00	162	120	Peak
5	* 2498.670	28.16	30.34	58.49	-15.51	74.00	162	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

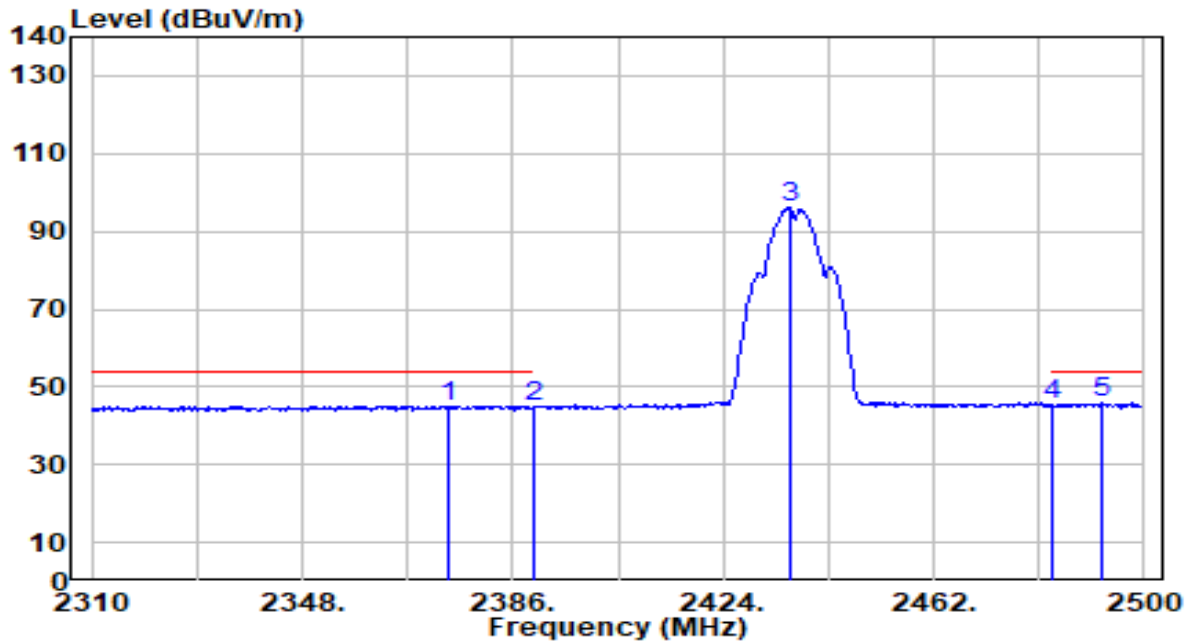


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2374.410	15.15	29.97	45.12	-8.88	54.00	162	120	Average
2	2390.000	14.73	29.99	44.72	-9.28	54.00	162	120	Average
3	2435.970	66.04	30.13	96.16	N/A	N/A	162	120	Average
4	2483.500	14.95	30.29	45.23	-8.77	54.00	162	120	Average
5	* 2492.210	15.59	30.31	45.90	-8.10	54.00	162	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

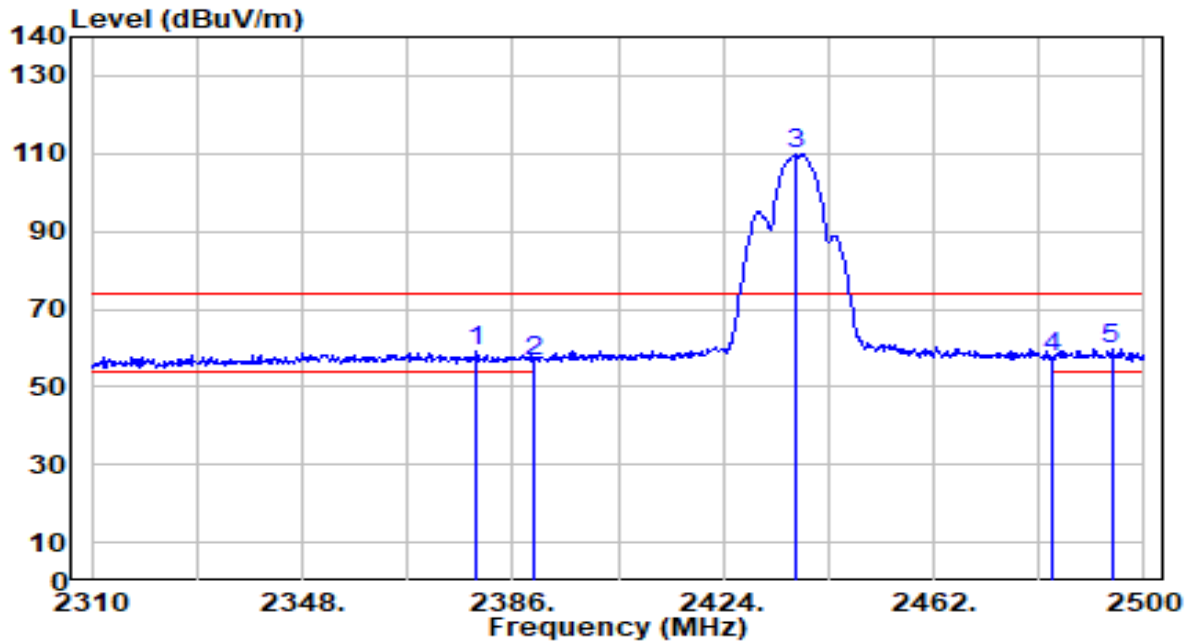


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2379.540	29.09	29.98	59.07	-14.93	74.00	180	4	Peak
2	2390.000	26.66	29.99	56.65	-17.35	74.00	180	4	Peak
3	2436.920	79.68	30.13	109.81	N/A	N/A	180	4	Peak
4	2483.500	27.15	30.29	57.44	-16.56	74.00	180	4	Peak
5	* 2494.110	29.54	30.32	59.86	-14.14	74.00	180	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

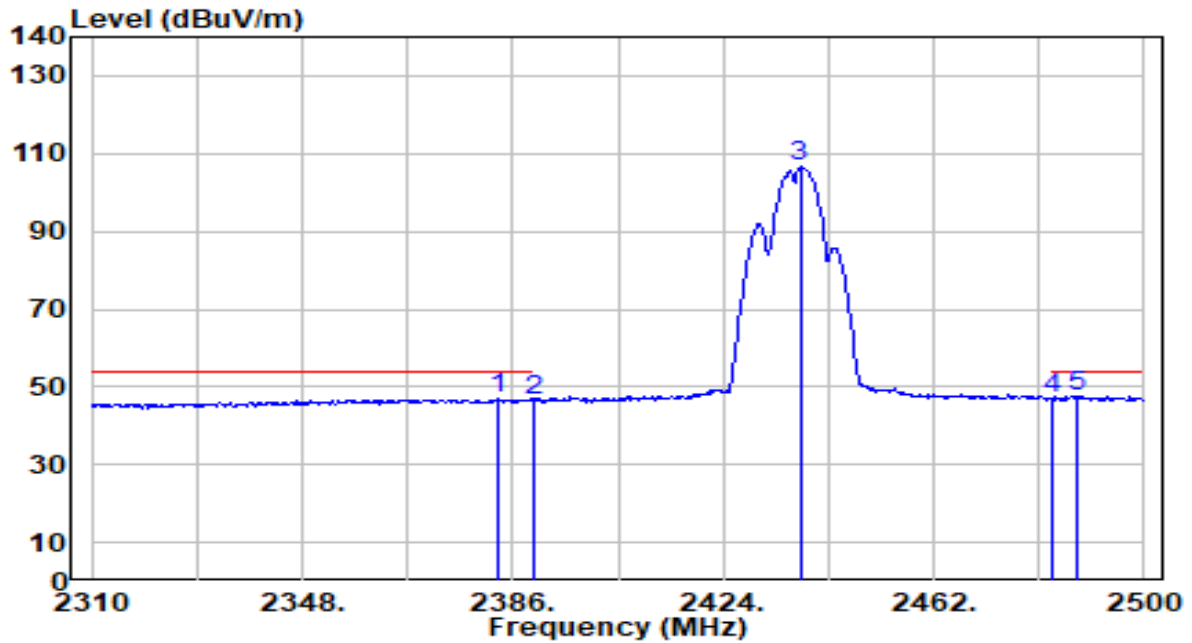


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.530	17.19	29.99	47.18	-6.82	54.00	180	4	Average
2	2390.000	16.42	29.99	46.41	-7.59	54.00	180	4	Average
3	2437.870	76.46	30.13	106.59	N/A	N/A	180	4	Average
4	2483.500	16.69	30.29	46.98	-7.02	54.00	180	4	Average
5	* 2487.650	17.49	30.30	47.79	-6.21	54.00	180	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

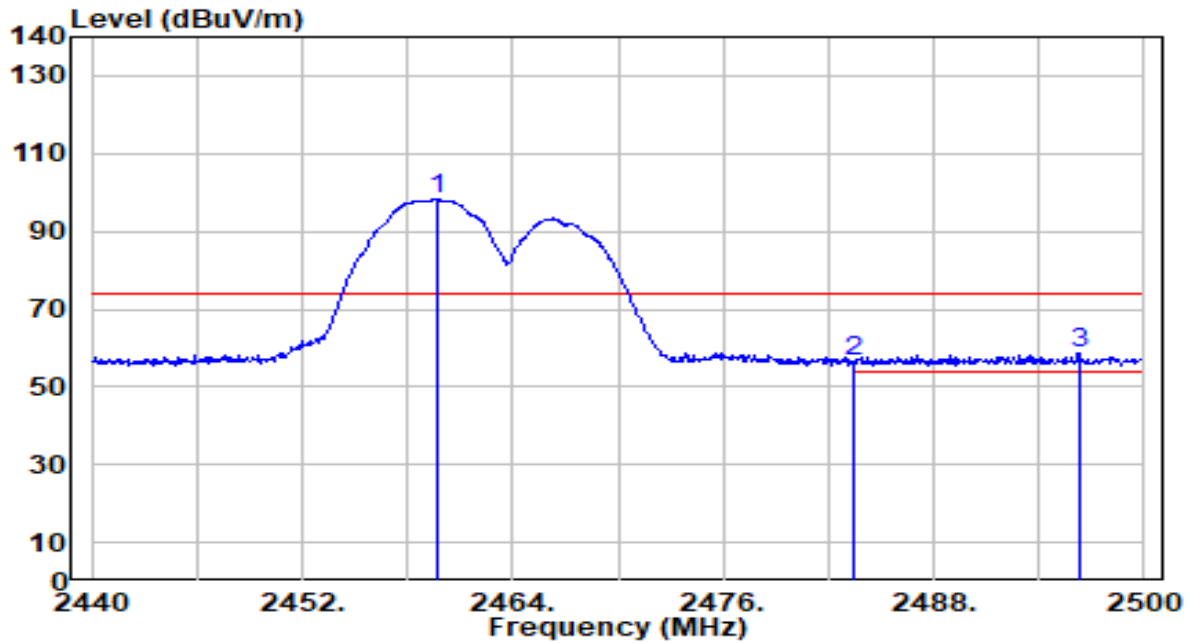


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.680	67.88	30.21	98.09	N/A	N/A	184	250	Peak
2	2483.500	26.03	30.29	56.32	-17.68	74.00	184	250	Peak
3	* 2496.280	28.43	30.33	58.76	-15.24	74.00	184	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

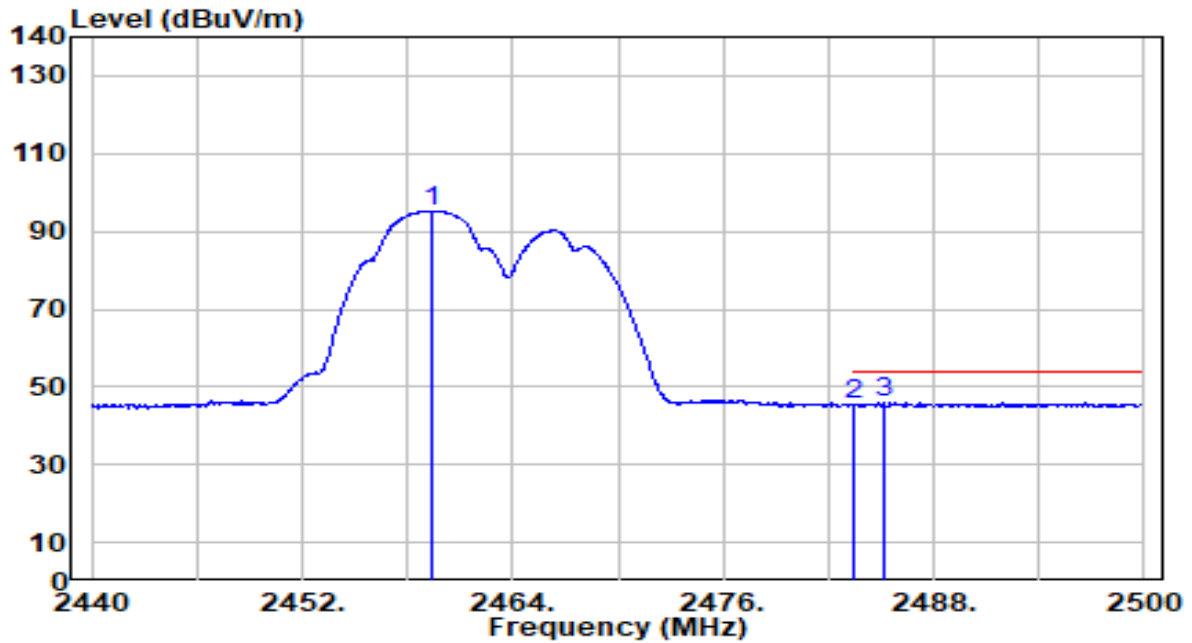


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.320	65.05	30.20	95.25	N/A	N/A	184	250	Average
2	2483.500	14.92	30.29	45.21	-8.79	54.00	184	250	Average
3	* 2485.180	15.53	30.29	45.82	-8.18	54.00	184	250	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

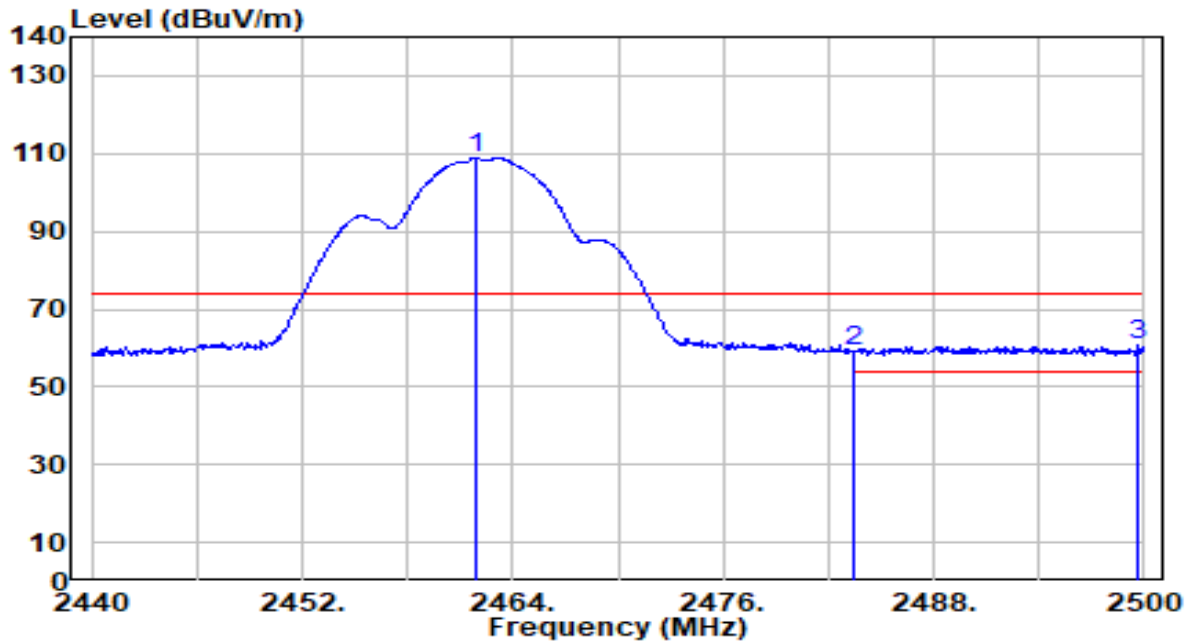


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.960	78.69	30.21	108.91	N/A	N/A	161	331	Peak
2	2483.500	28.92	30.29	59.20	-14.80	74.00	161	331	Peak
3	* 2499.640	30.49	30.34	60.83	-13.17	74.00	161	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

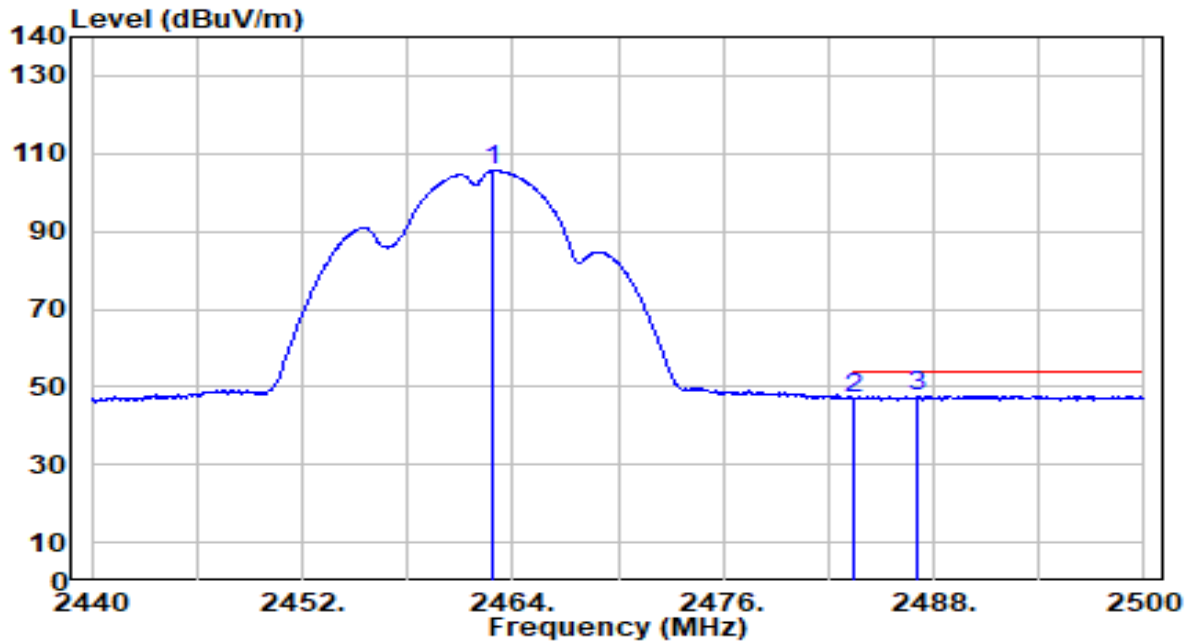


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.920	75.39	30.22	105.60	N/A	N/A	161	331	Average
2	2483.500	17.00	30.29	47.28	-6.72	54.00	161	331	Average
3	* 2487.100	17.39	30.30	47.68	-6.32	54.00	161	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

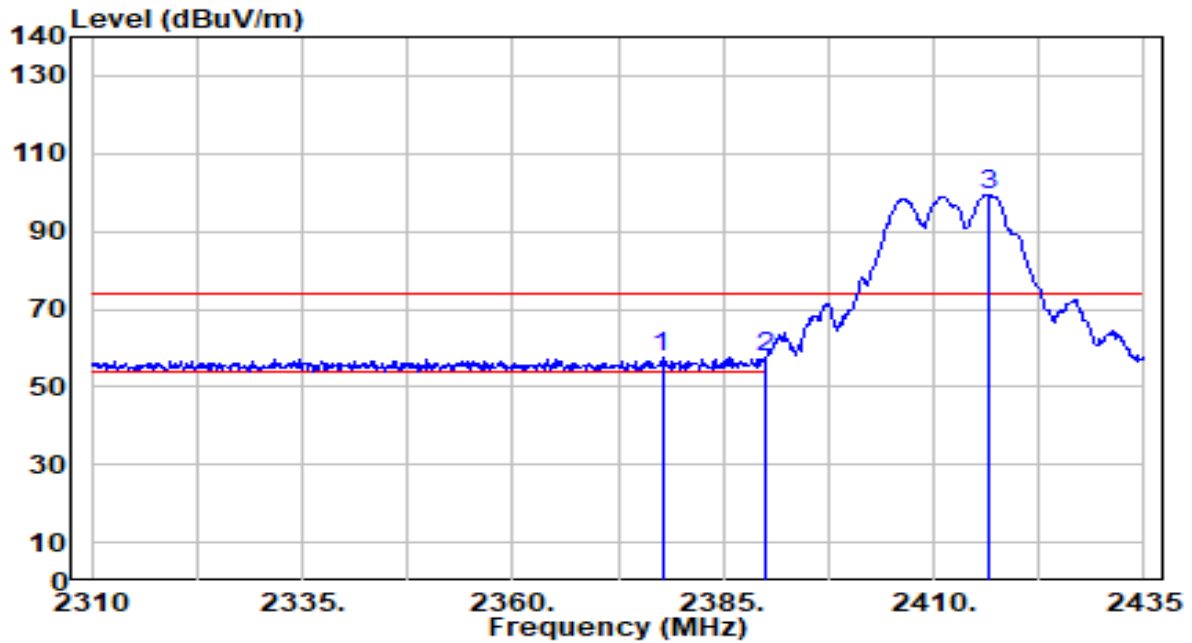


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2377.750	27.57	29.98	57.55	-16.45	74.00	261	254	Peak
2	* 2390.000	27.69	29.99	57.69	-16.31	74.00	261	254	Peak
3	2416.500	69.34	30.06	99.40	N/A	N/A	261	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

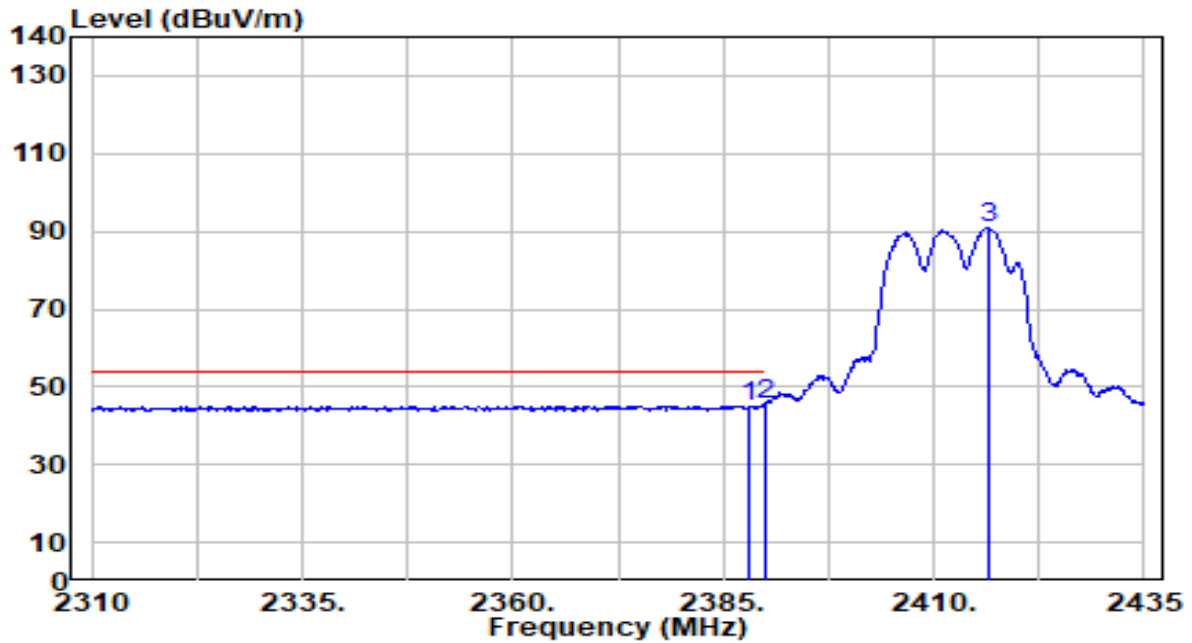


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.125	15.12	29.99	45.12	-8.88	54.00	261	254	Average
2	* 2390.000	15.63	29.99	45.62	-8.38	54.00	261	254	Average
3	2416.625	60.94	30.06	91.00	N/A	N/A	261	254	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

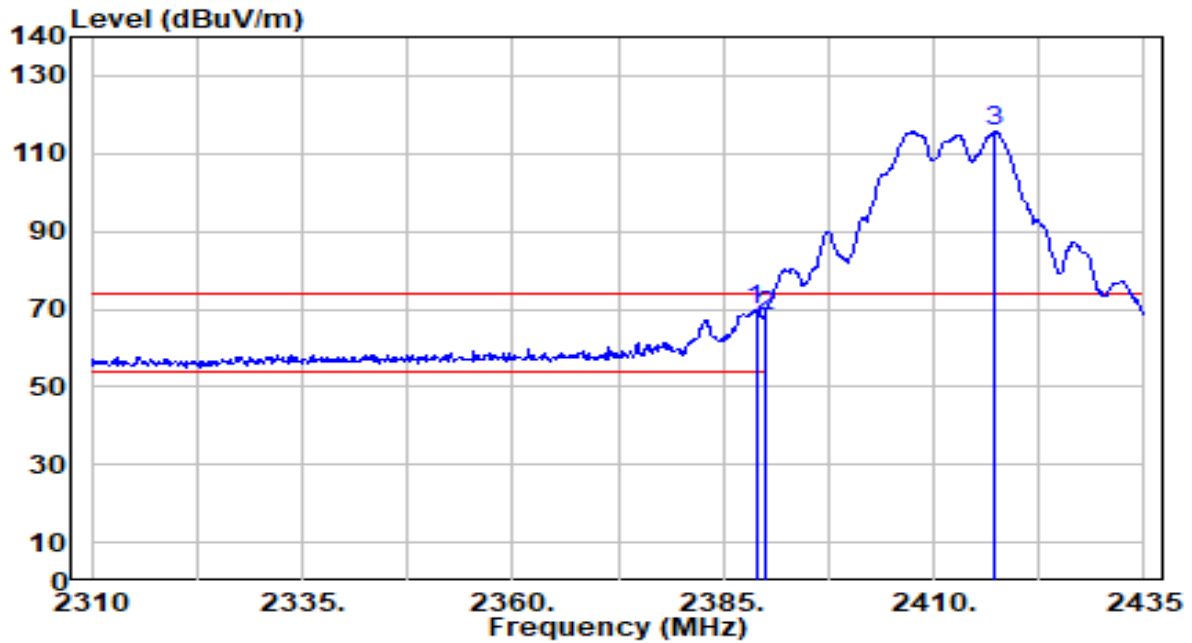


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.875	39.77	29.99	69.76	-4.24	74.00	168	356	Peak
2		2390.000	38.07	29.99	68.07	-5.93	74.00	168	356	Peak
3		2417.250	85.51	30.07	115.57	N/A	N/A	168	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

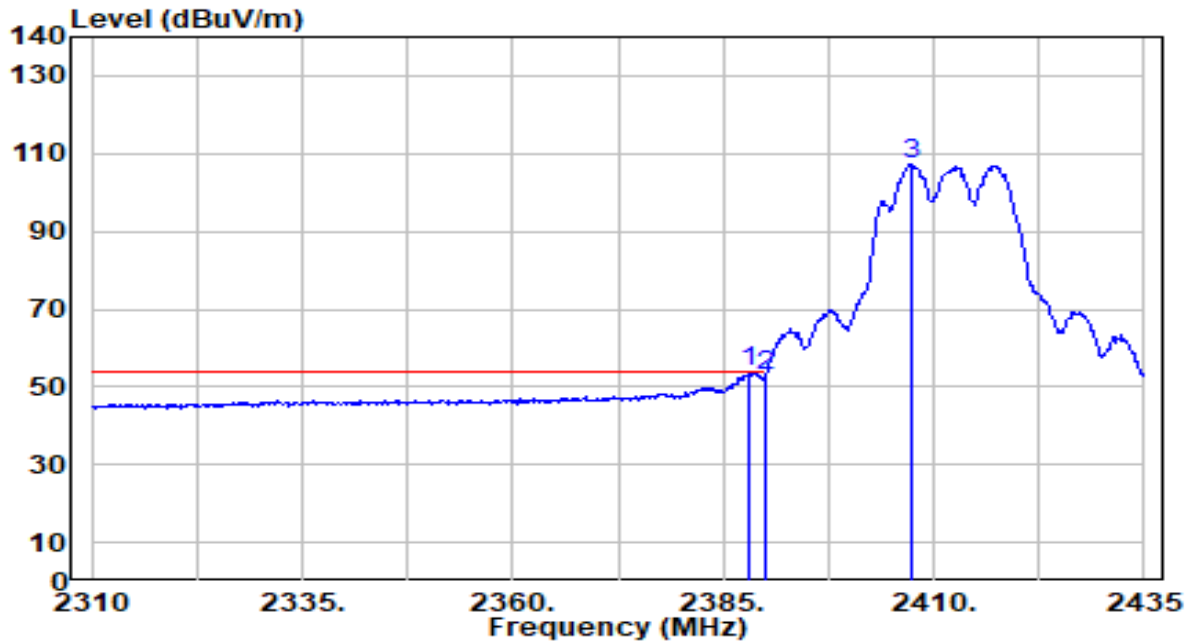


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.82	29.99	53.82	-0.18	54.00	168	356	Average
2		22.96	29.99	52.96	-1.04	54.00	168	356	Average
3		77.04	30.03	107.08	N/A	N/A	168	356	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-04
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

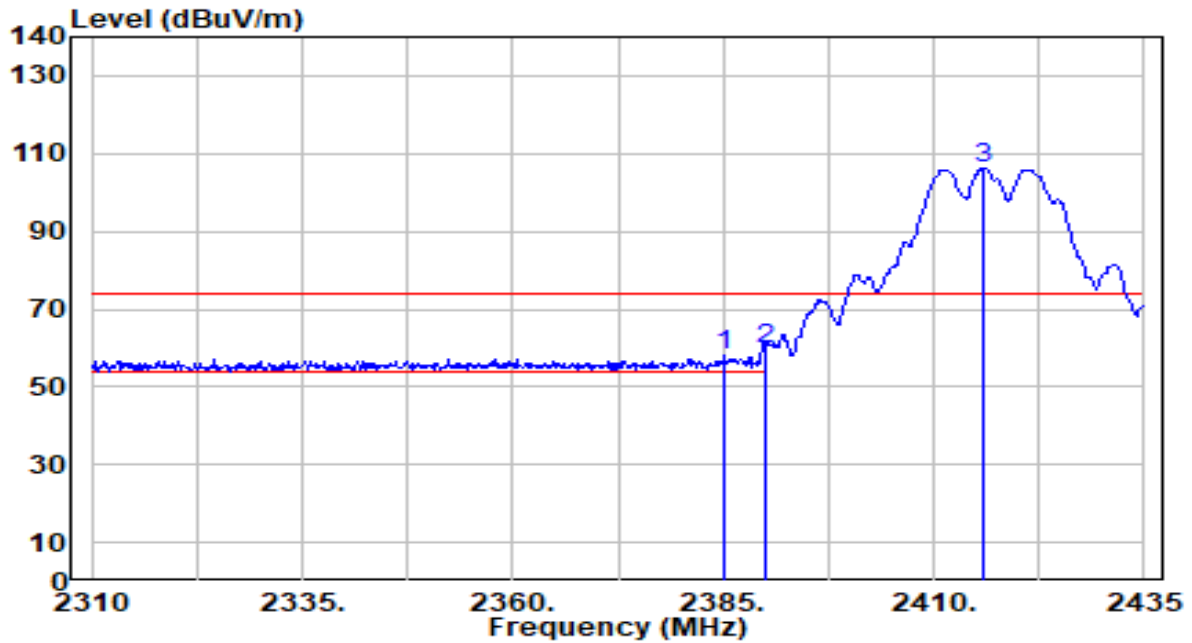


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.125	27.89	29.99	57.88	-16.12	74.00	264	243	Peak
2	* 2390.000	29.81	29.99	59.80	-14.20	74.00	264	243	Peak
3	2416.000	76.25	30.06	106.31	N/A	N/A	264	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-04
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

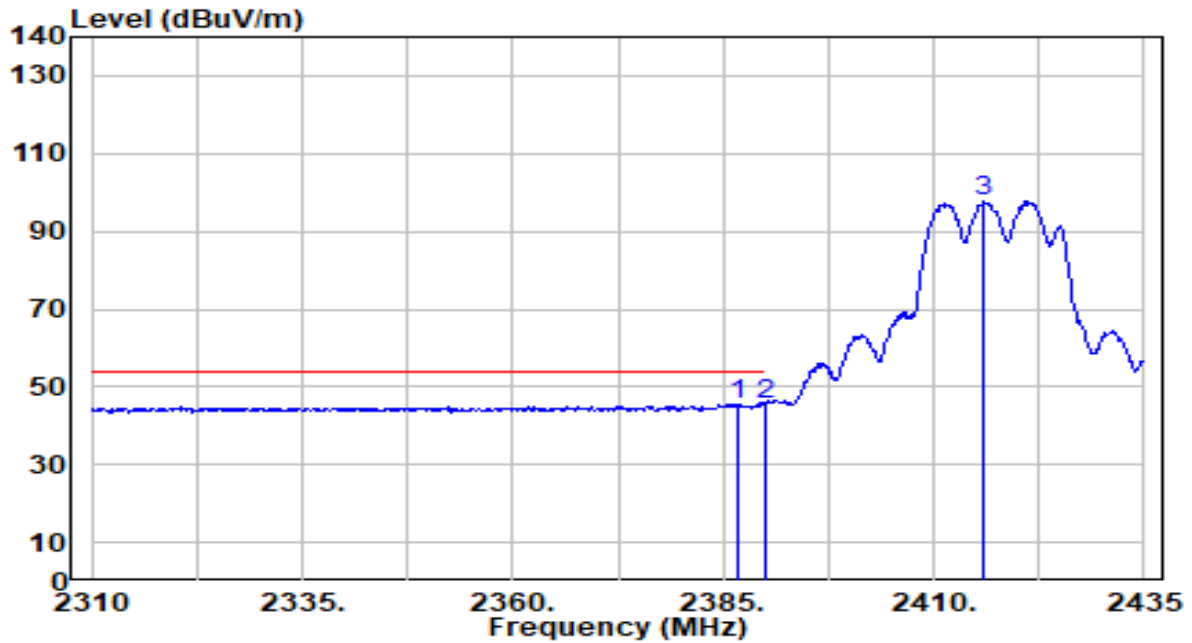


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.875	15.36	29.99	45.35	-8.65	54.00	264	243	Average
2	* 2390.000	15.60	29.99	45.59	-8.41	54.00	264	243	Average
3	2416.000	67.78	30.06	97.84	N/A	N/A	264	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-04
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

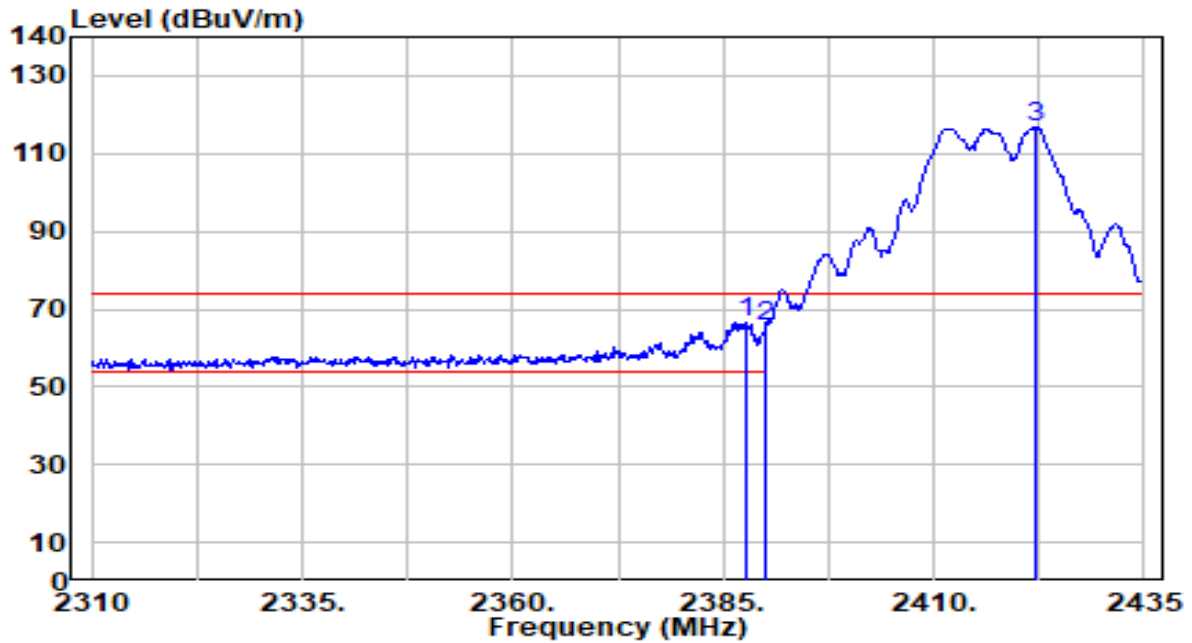


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.875	36.73	29.99	66.72	-7.28	74.00	156	359	Peak
2		2390.000	35.60	29.99	65.60	-8.40	74.00	156	359	Peak
3		2422.125	86.71	30.08	116.79	N/A	N/A	156	359	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-04
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

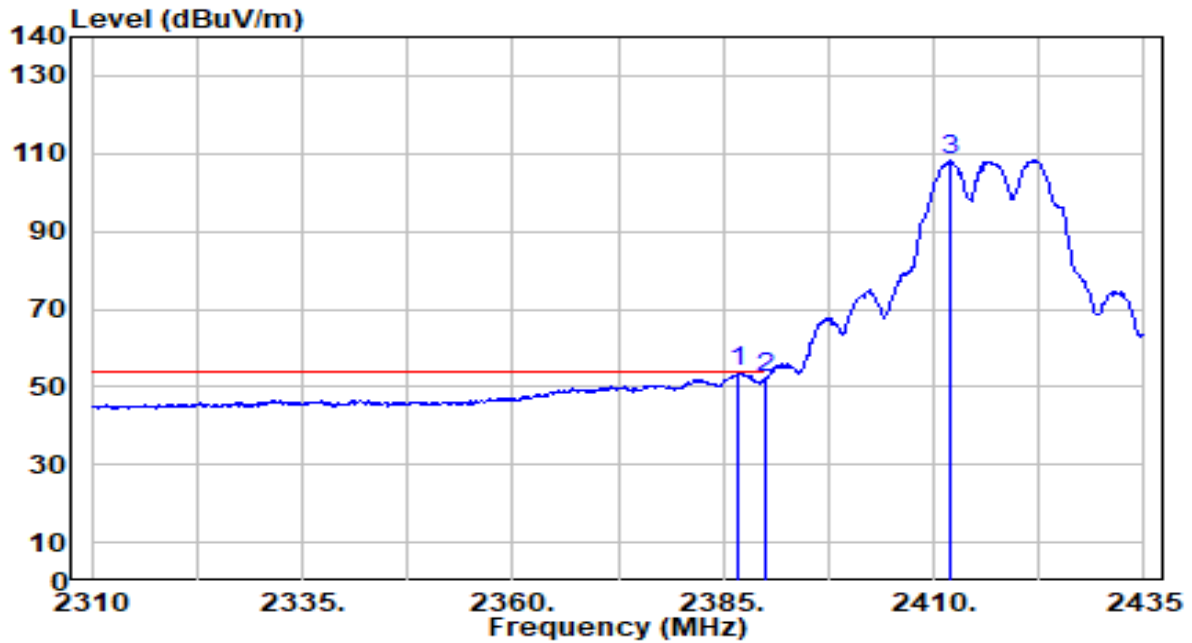


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.83	29.99	53.82	-0.18	54.00	156	359	Average
2		22.53	29.99	52.52	-1.48	54.00	156	359	Average
3		78.24	30.05	108.29	N/A	N/A	156	359	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

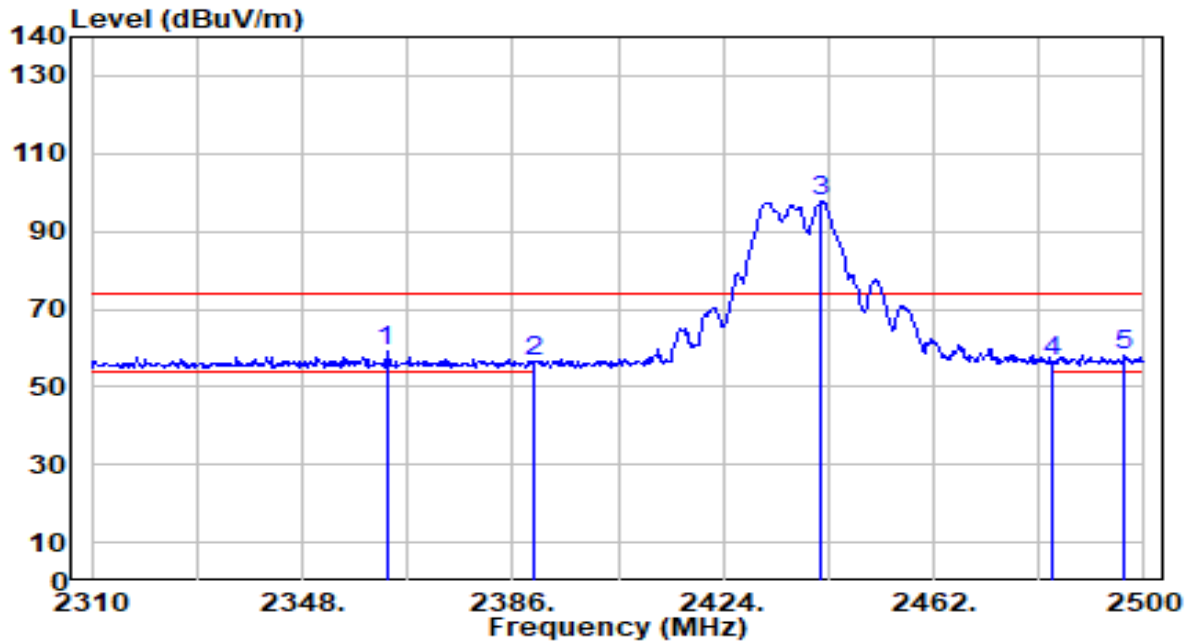


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2363.200	29.26	29.96	59.21	-14.79	74.00	127	37	Peak
2	2390.000	26.29	29.99	56.28	-17.72	74.00	127	37	Peak
3	2441.670	67.42	30.15	97.56	N/A	N/A	127	37	Peak
4	2483.500	26.34	30.29	56.63	-17.37	74.00	127	37	Peak
5	2496.390	27.71	30.33	58.04	-15.96	74.00	127	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

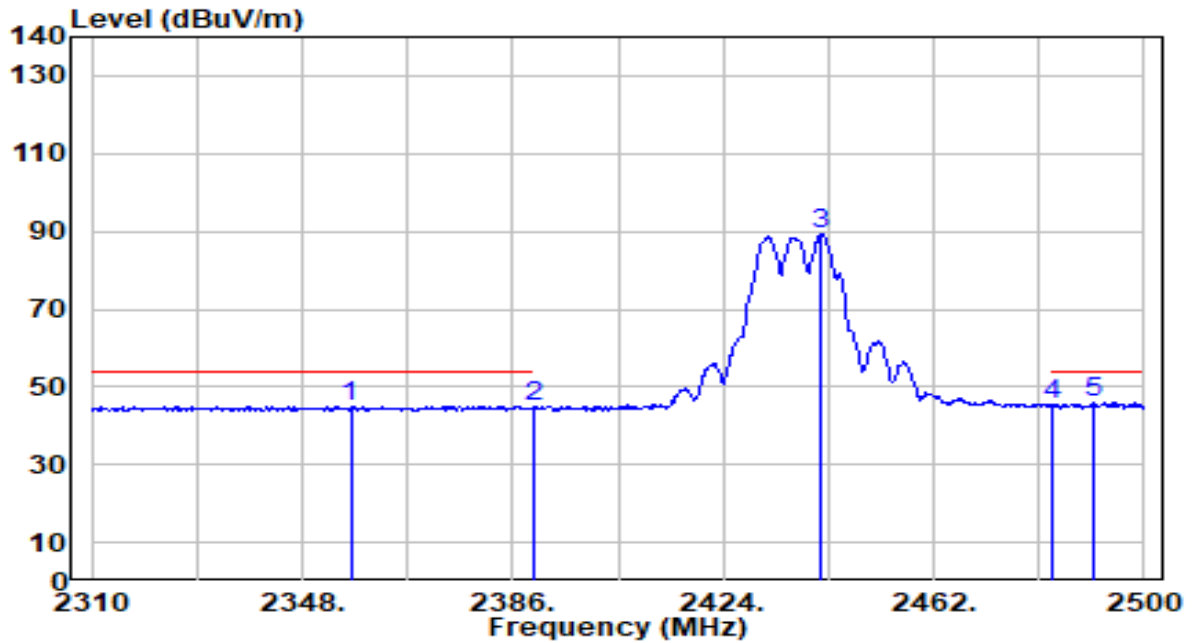


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2356.740	15.14	29.95	45.09	-8.91	54.00	127	37	Average
2	2390.000	14.66	29.99	44.66	-9.34	54.00	127	37	Average
3	2441.670	59.02	30.15	89.17	N/A	N/A	127	37	Average
4	2483.500	14.91	30.29	45.20	-8.80	54.00	127	37	Average
5	* 2490.880	15.50	30.31	45.81	-8.19	54.00	127	37	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

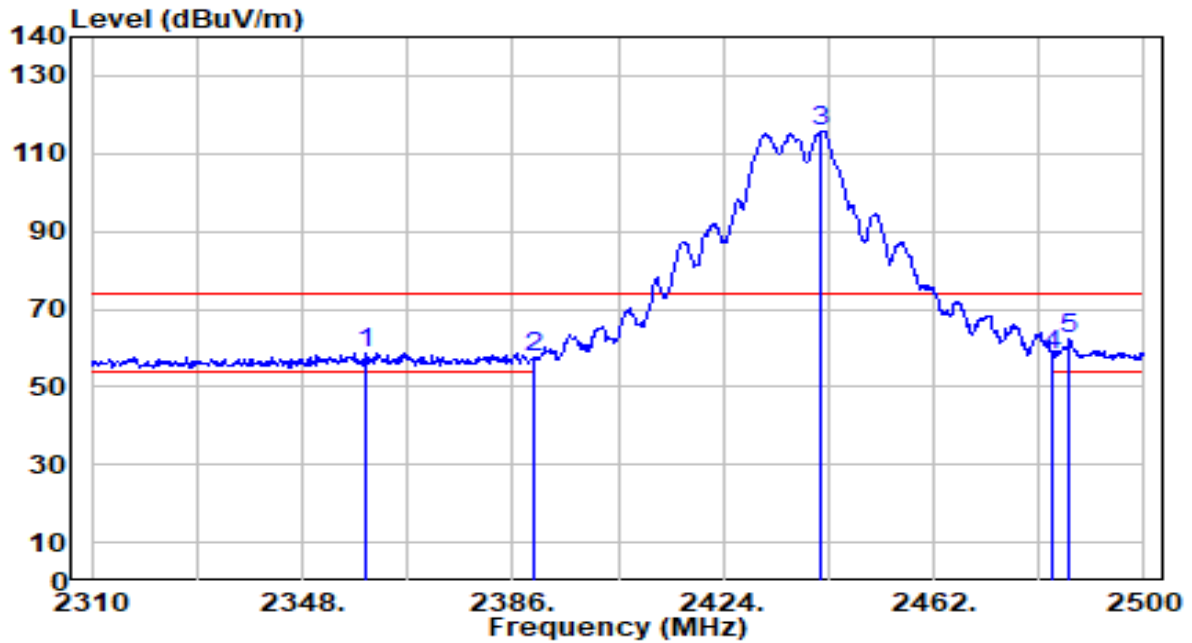


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2359.590	28.73	29.95	58.69	-15.31	74.00	151	37	Peak
2	2390.000	27.41	29.99	57.40	-16.60	74.00	151	37	Peak
3	2441.670	85.82	30.15	115.96	N/A	N/A	151	37	Peak
4	2483.500	27.64	30.29	57.92	-16.08	74.00	151	37	Peak
5	* 2486.510	32.27	30.30	62.57	-11.43	74.00	151	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

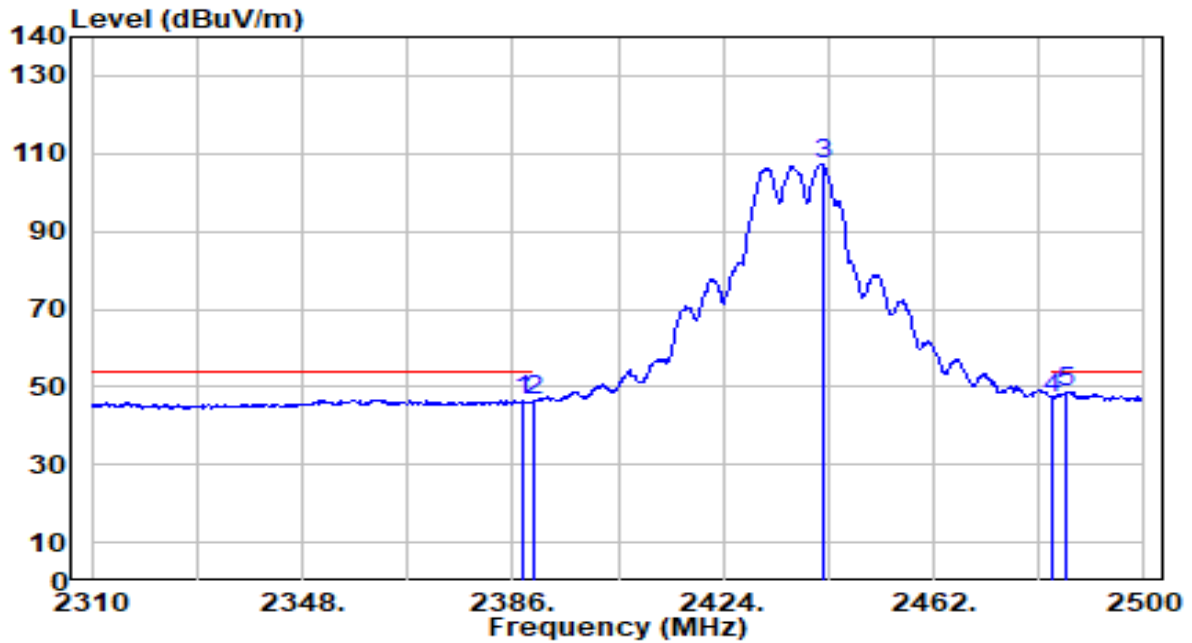


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	16.61	29.99	46.61	-7.39	54.00	151	37	Average
2	2390.000	16.51	29.99	46.51	-7.49	54.00	151	37	Average
3	2442.050	77.20	30.15	107.35	N/A	N/A	151	37	Average
4	2483.500	17.00	30.29	47.28	-6.72	54.00	151	37	Average
5	* 2486.130	18.35	30.29	48.65	-5.35	54.00	151	37	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-04
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

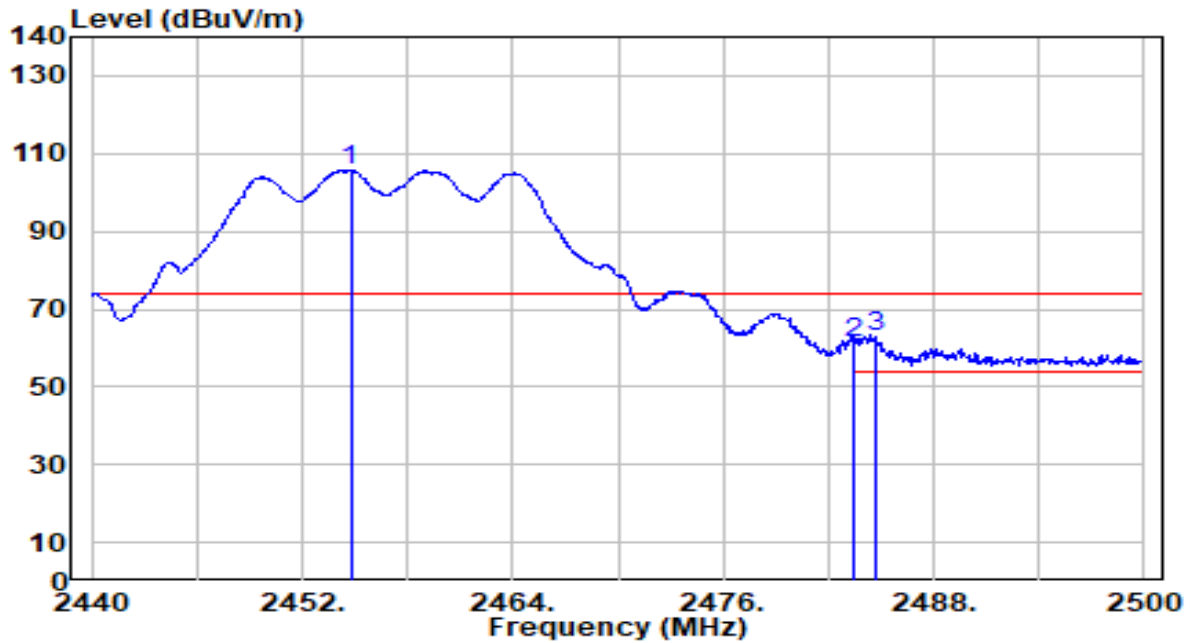


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.760	75.57	30.19	105.76	N/A	N/A	142	113	Peak
2	2483.500	31.05	30.29	61.33	-12.67	74.00	142	113	Peak
3	* 2484.640	32.47	30.29	62.76	-11.24	74.00	142	113	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-04
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

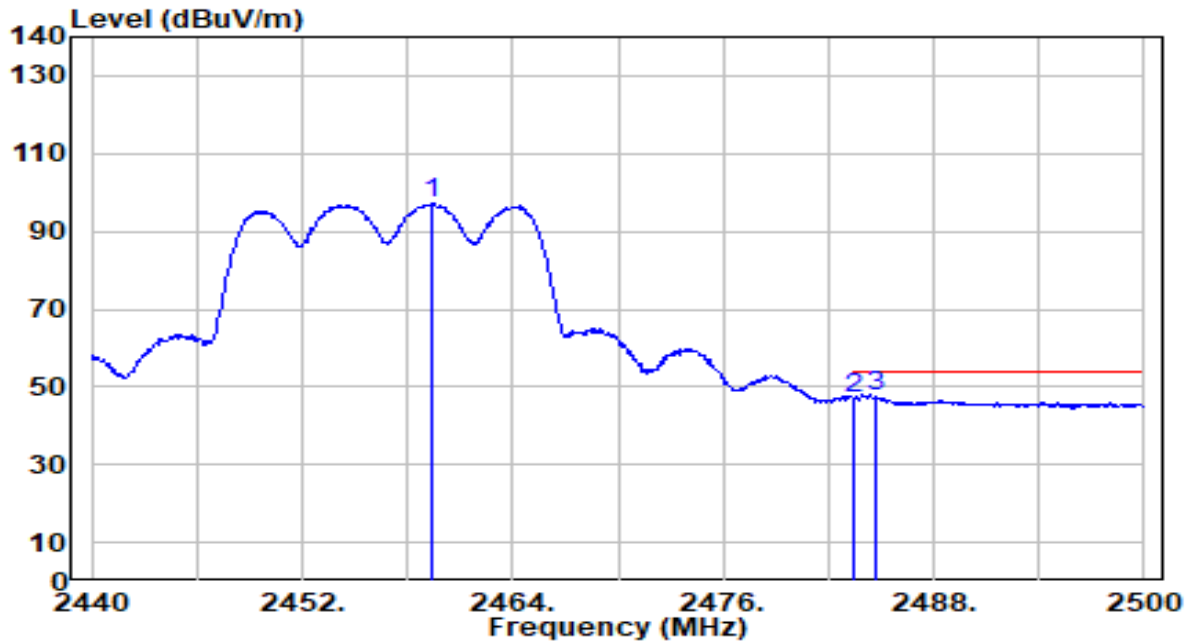


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.440	66.77	30.21	96.98	N/A	N/A	142	113	Average
2	2483.500	16.50	30.29	46.78	-7.22	54.00	142	113	Average
3	* 2484.640	17.03	30.29	47.32	-6.68	54.00	142	113	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-04
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

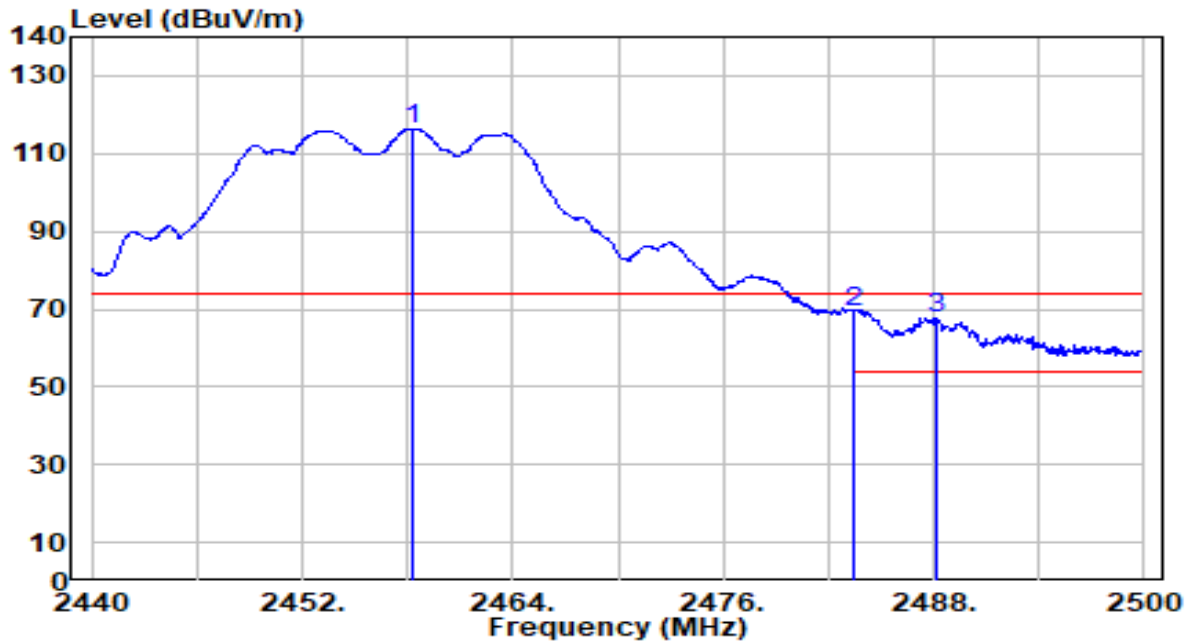


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.240	86.18	30.20	116.38	N/A	N/A	163	13	Peak
2	* 2483.500	38.91	30.29	69.20	-4.80	74.00	163	13	Peak
3	2488.120	37.36	30.30	67.66	-6.34	74.00	163	13	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-04
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

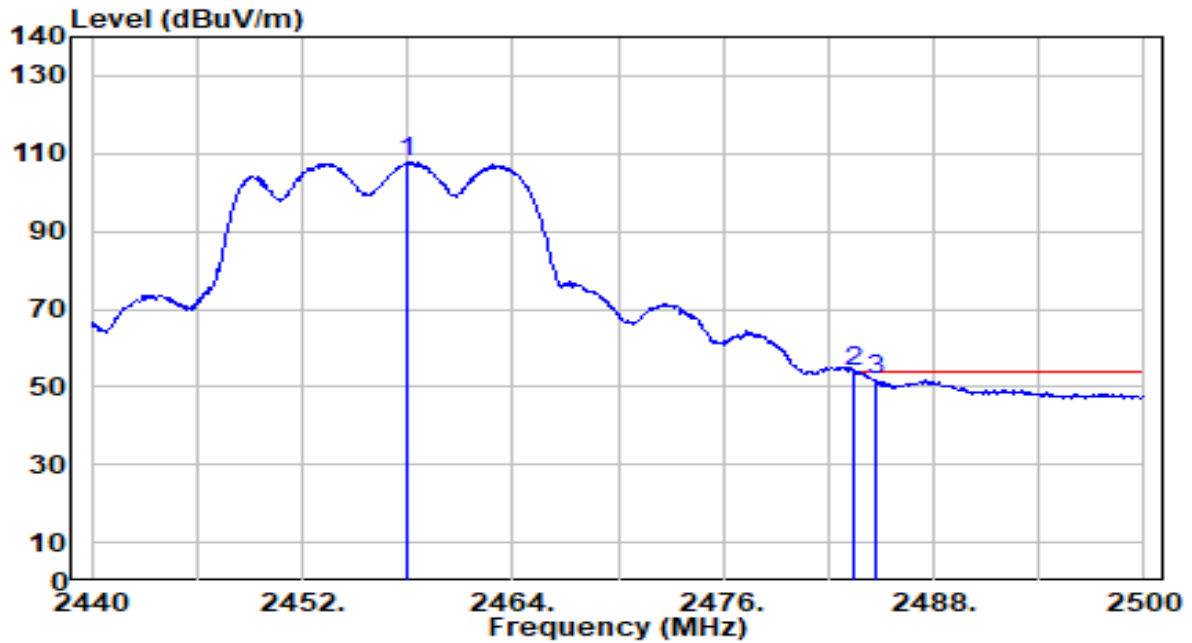


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.000	77.46	30.20	107.66	N/A	N/A	163	13	Average
2	* 2483.500	23.59	30.29	53.88	-0.12	54.00	163	13	Average
3	2484.700	21.72	30.29	52.01	-1.99	54.00	163	13	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

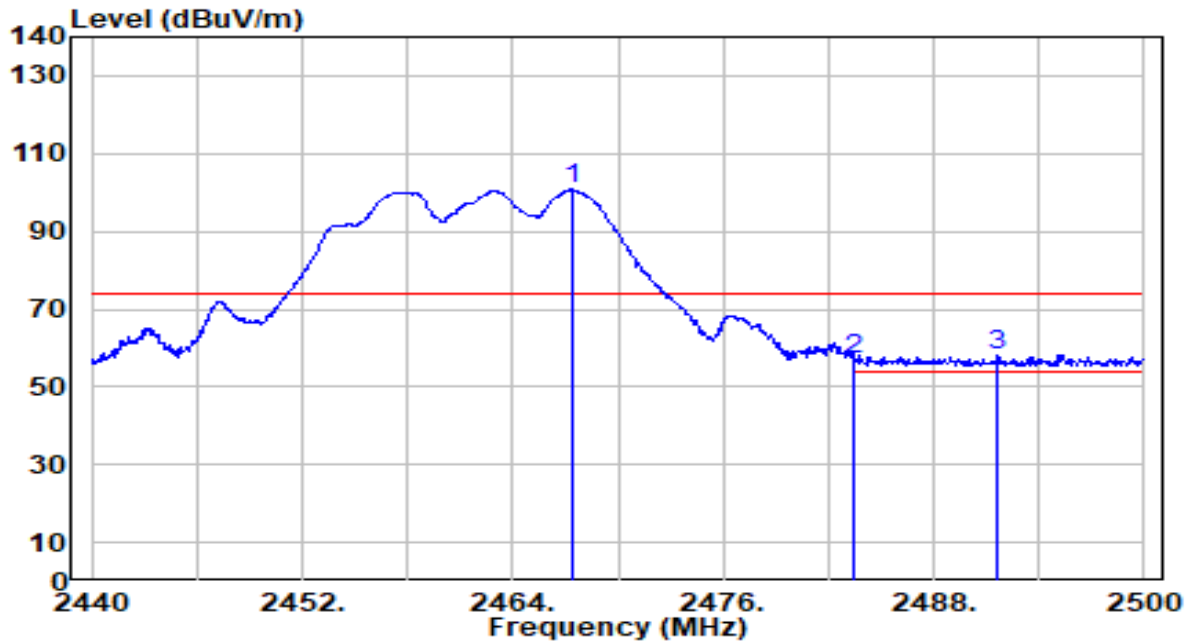


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.360	70.43	30.23	100.67	N/A	N/A	142	124	Peak
2	2483.500	26.91	30.29	57.19	-16.81	74.00	142	124	Peak
3	* 2491.600	27.86	30.31	58.17	-15.83	74.00	142	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

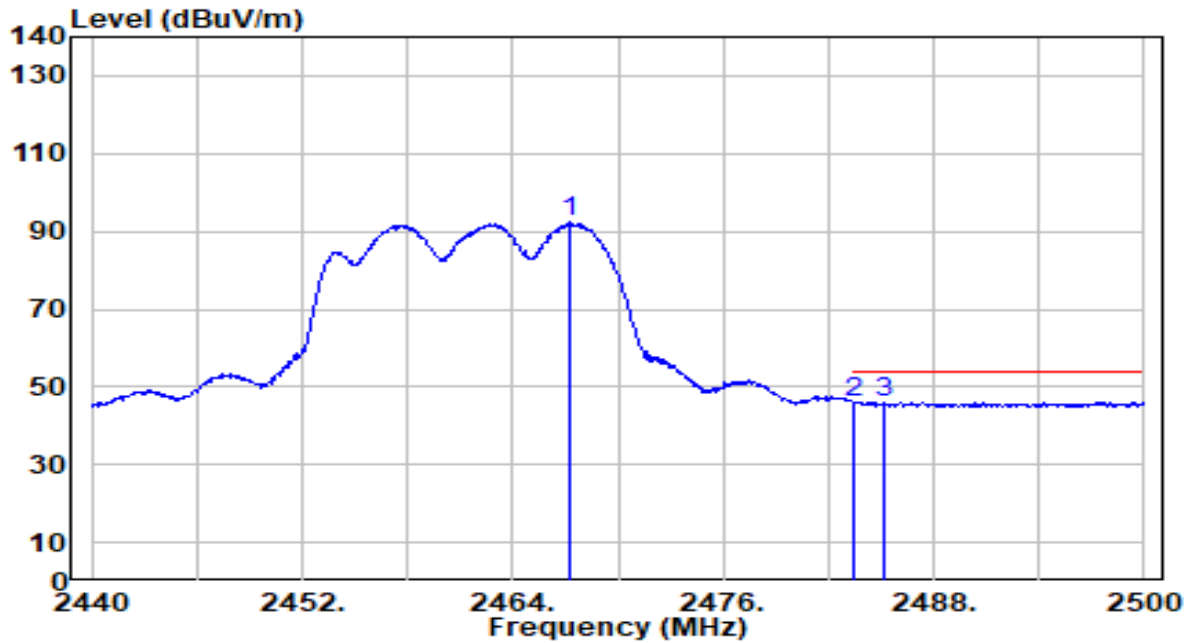


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.180	61.96	30.23	92.19	N/A	N/A	142	124	Average
2	2483.500	15.50	30.29	45.78	-8.22	54.00	142	124	Average
3	* 2485.240	15.72	30.29	46.01	-7.99	54.00	142	124	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

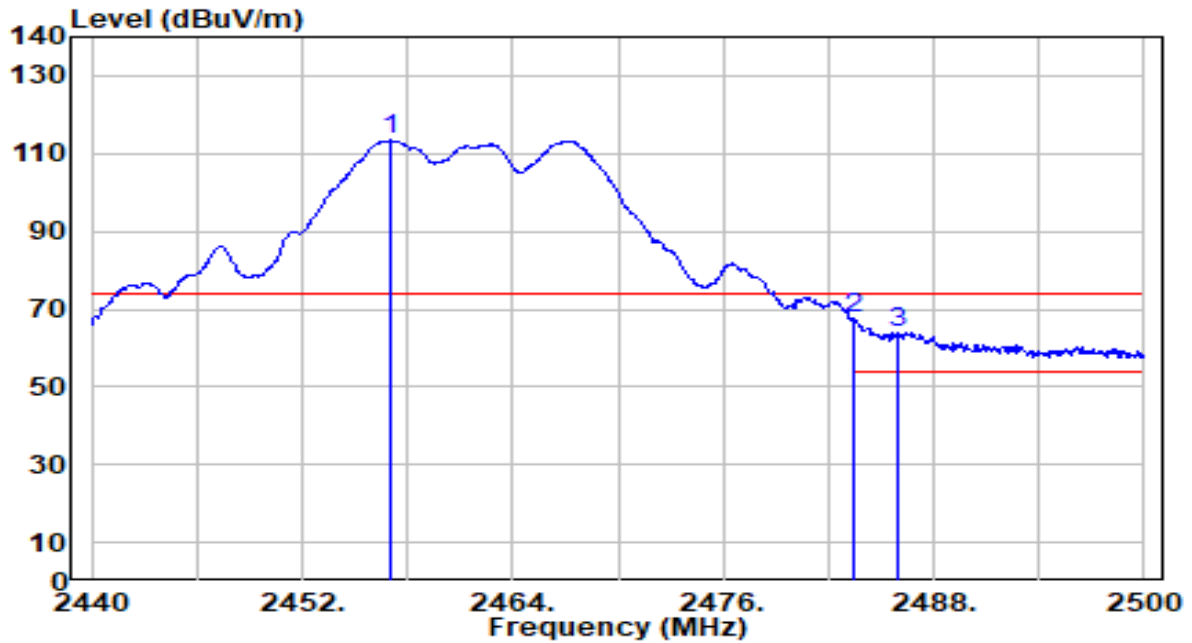


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.100	83.13	30.20	113.32	N/A	N/A	180	0	Peak
2	* 2483.500	37.13	30.29	67.41	-6.59	74.00	180	0	Peak
3	2485.960	33.82	30.29	64.12	-9.88	74.00	180	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-05-02
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

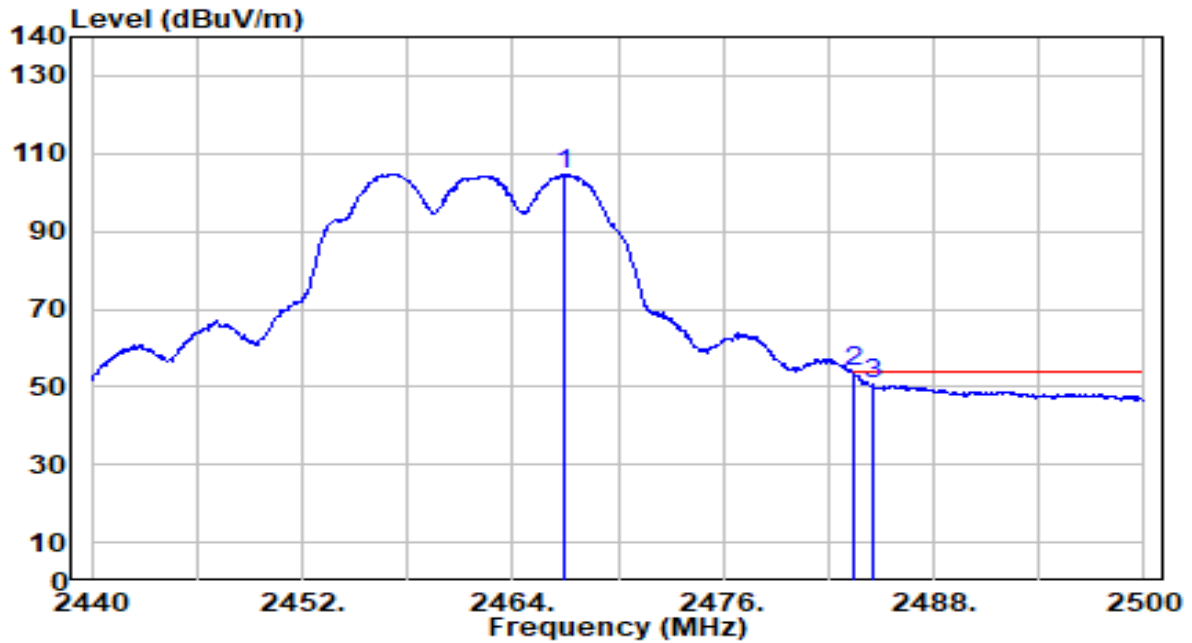


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.940	74.62	30.23	104.85	N/A	N/A	180	0	Average
2	* 2483.500	23.60	30.29	53.88	-0.12	54.00	180	0	Average
3	2484.520	20.26	30.29	50.55	-3.45	54.00	180	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

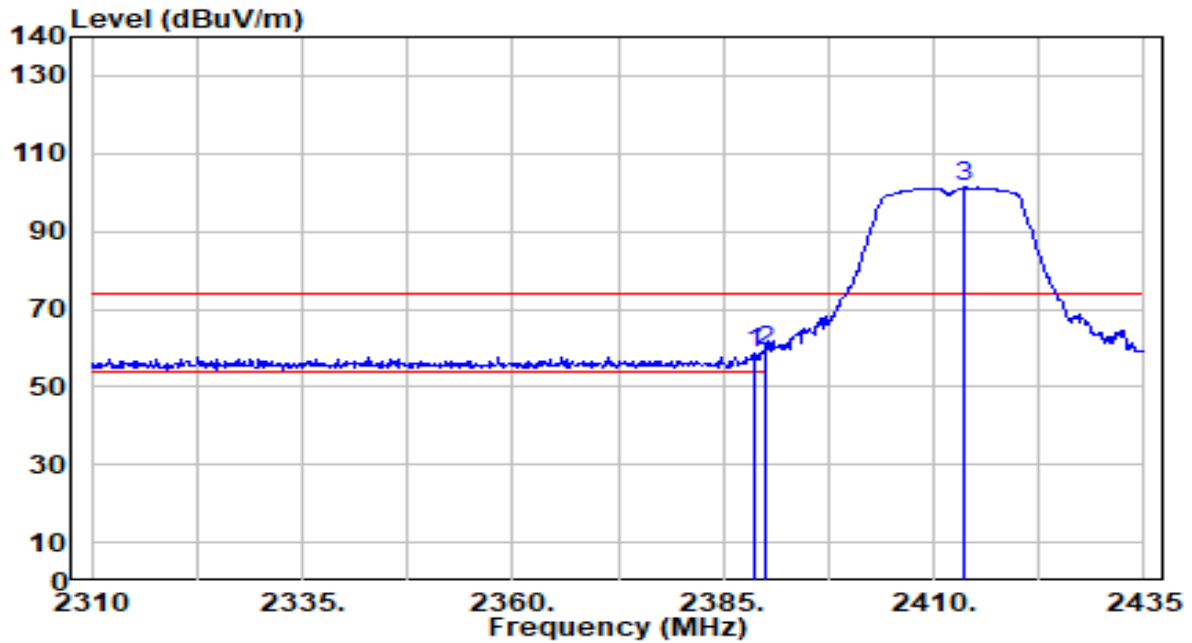


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	28.67	29.99	58.67	-15.33	74.00	263	256	Peak
2	* 2390.000	29.20	29.99	59.19	-14.81	74.00	263	256	Peak
3	2413.625	71.16	30.05	101.22	N/A	N/A	263	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

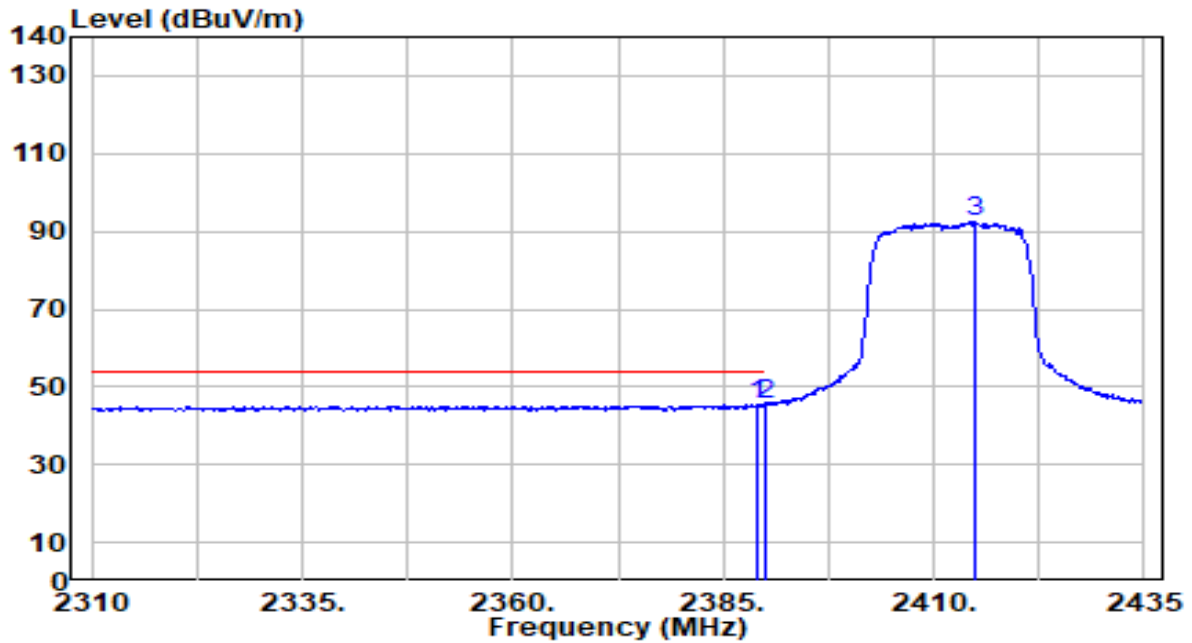


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.000	15.49	29.99	45.49	-8.51	54.00	263	256	Average
2		2390.000	15.47	29.99	45.46	-8.54	54.00	263	256	Average
3		2415.000	62.49	30.06	92.54	N/A	N/A	263	256	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

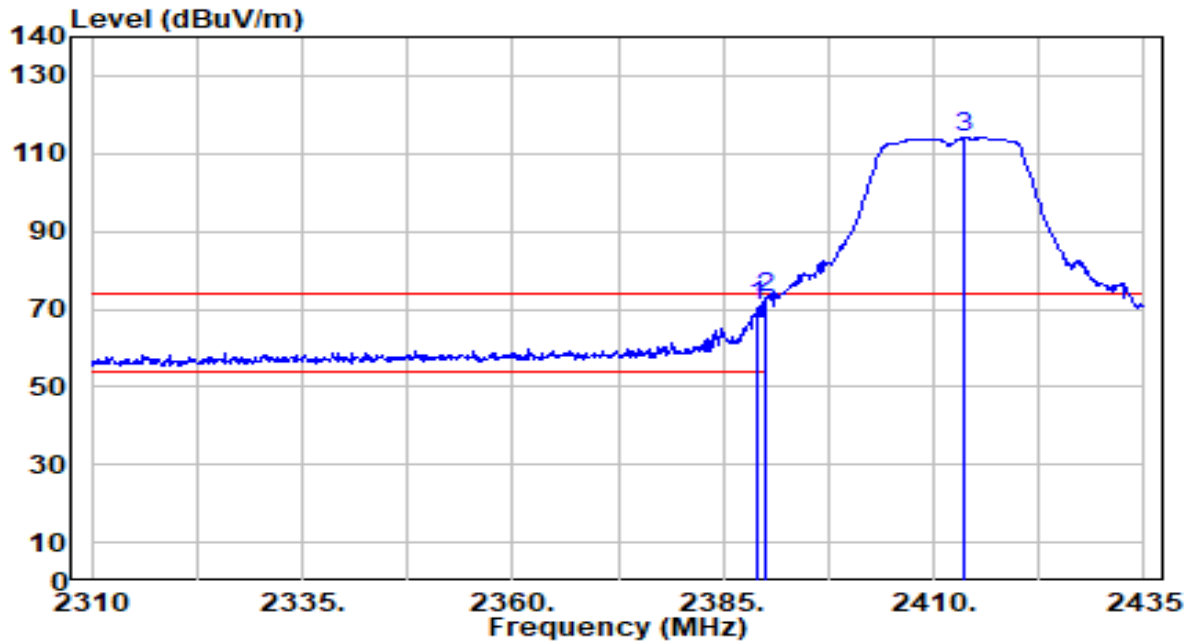


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	40.69	29.99	70.68	-3.32	74.00	172	360	Peak
2	* 2390.000	42.79	29.99	72.78	-1.22	74.00	172	360	Peak
3	2413.625	83.98	30.05	114.03	N/A	N/A	172	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

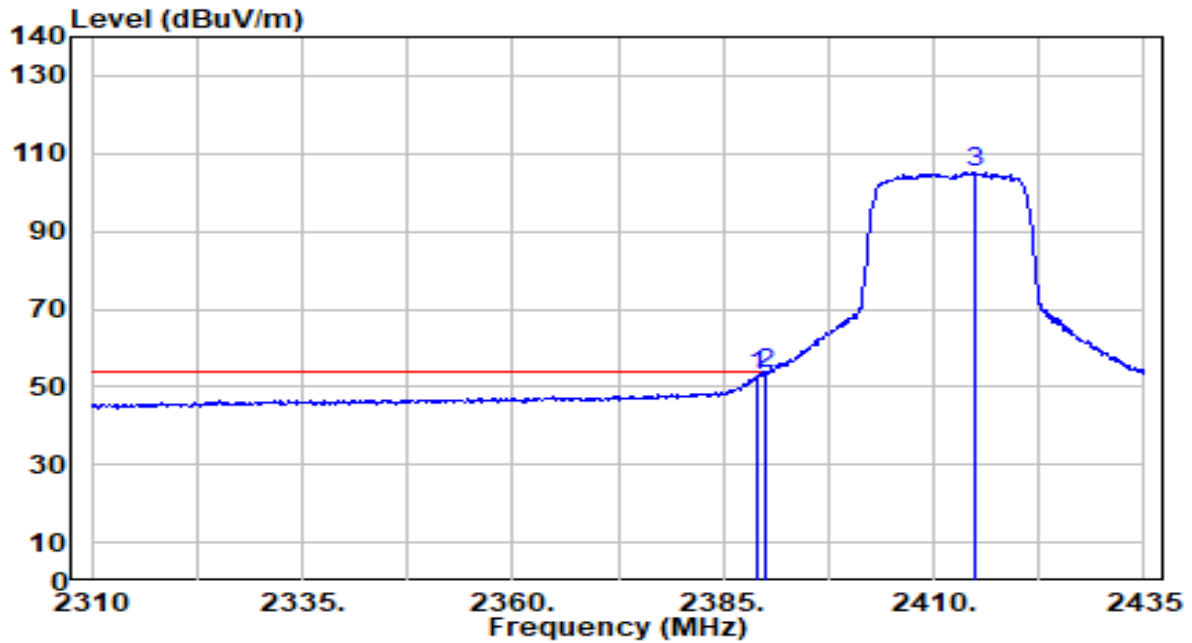


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	22.82	29.99	52.81	-1.19	54.00	172	360	Average
2	* 2390.000	23.41	29.99	53.41	-0.59	54.00	172	360	Average
3	2415.000	75.30	30.06	105.36	N/A	N/A	172	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

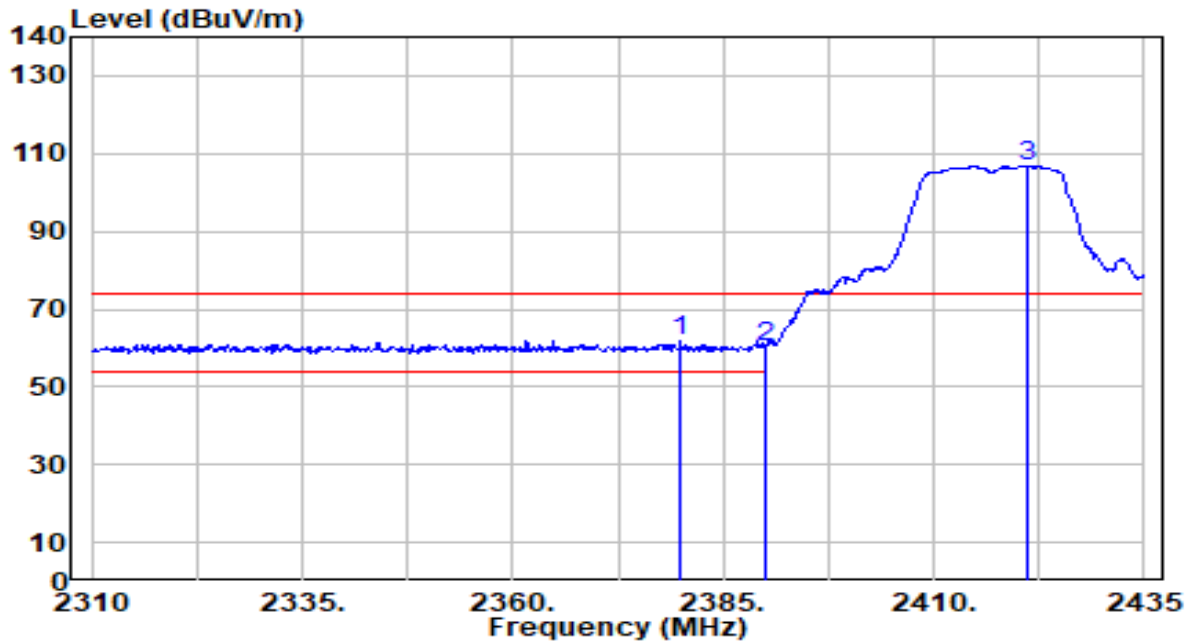


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2380.000	31.83	29.98	61.81	-12.19	74.00	137	115	Peak
2		2390.000	30.11	29.99	60.10	-13.90	74.00	137	115	Peak
3		2421.250	76.60	30.08	106.68	N/A	N/A	137	115	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

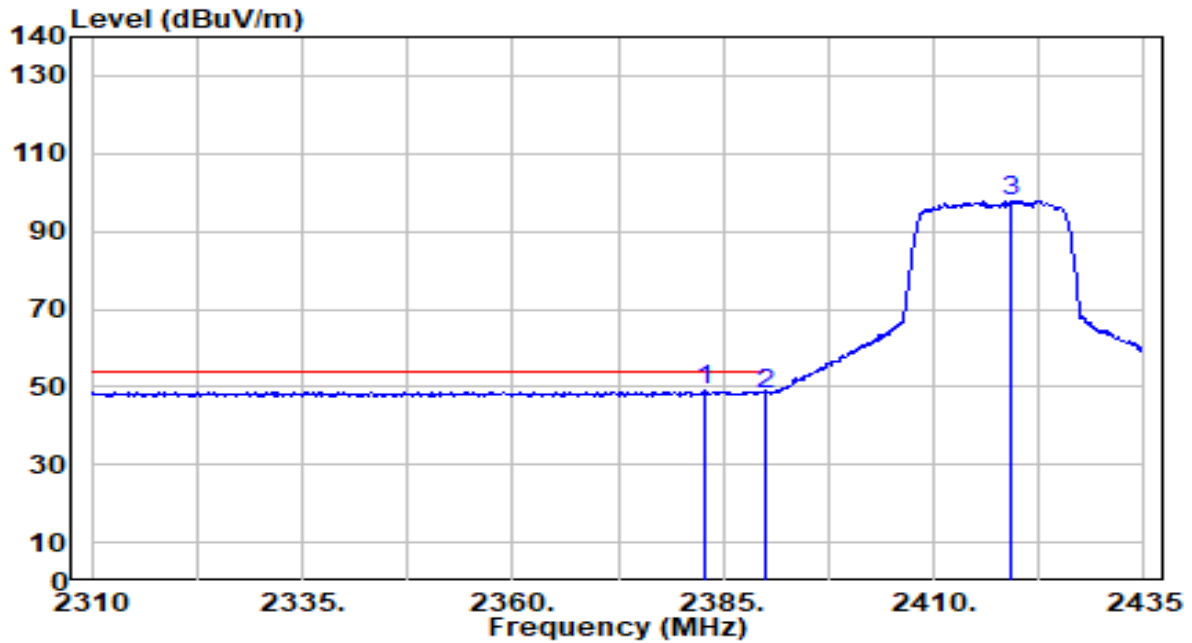


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2382.875	19.12	29.99	49.11	-4.89	54.00	137	115	Average
2		2390.000	18.29	29.99	48.28	-5.72	54.00	137	115	Average
3		2419.125	67.74	30.07	97.81	N/A	N/A	137	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

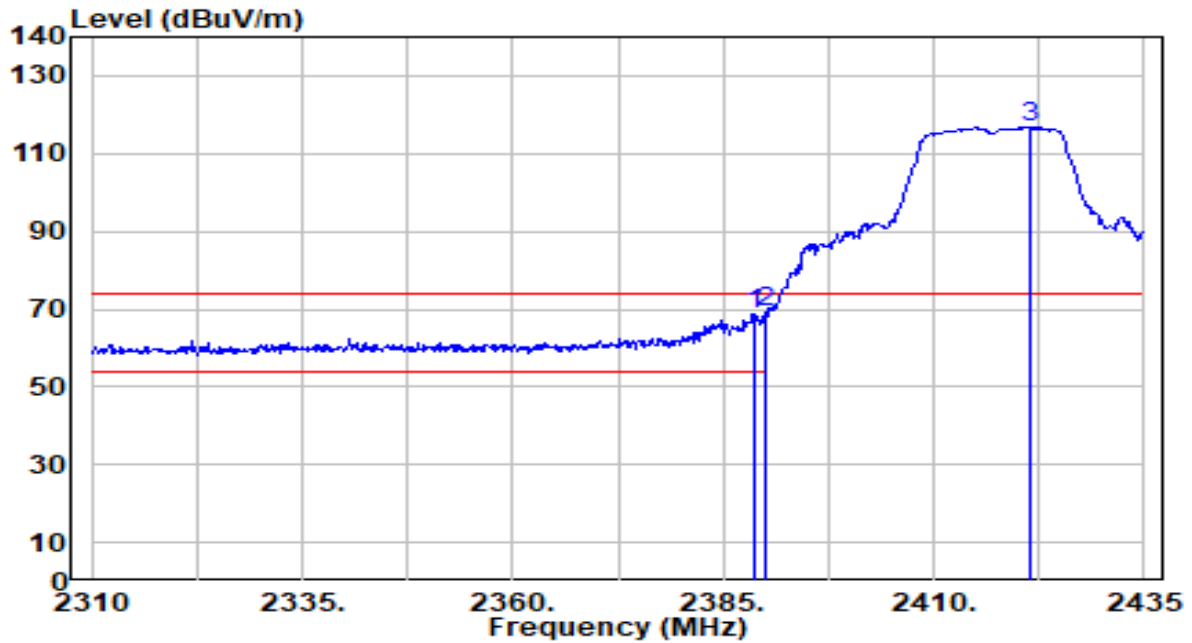


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.625	38.63	29.99	68.62	-5.38	74.00	155	360	Peak
2	* 2390.000	39.01	29.99	69.00	-5.00	74.00	155	360	Peak
3	2421.375	86.63	30.08	116.71	N/A	N/A	155	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

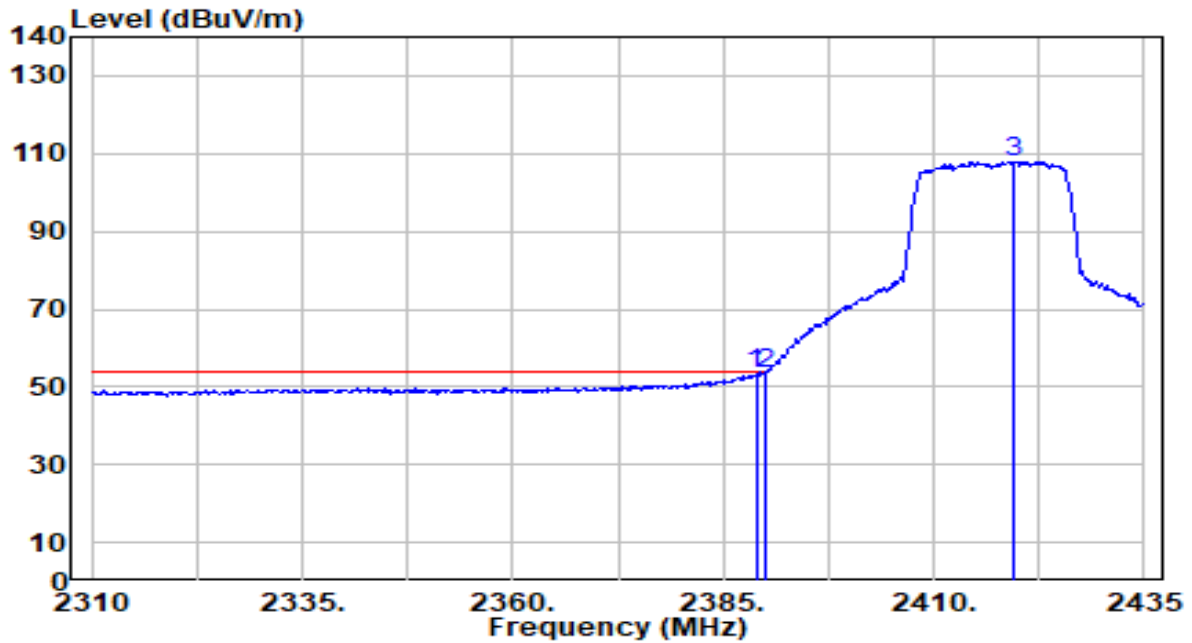


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	23.45	29.99	53.44	-0.56	54.00	155	360	Average
2	* 2390.000	23.51	29.99	53.50	-0.50	54.00	155	360	Average
3	2419.500	77.89	30.07	107.96	N/A	N/A	155	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

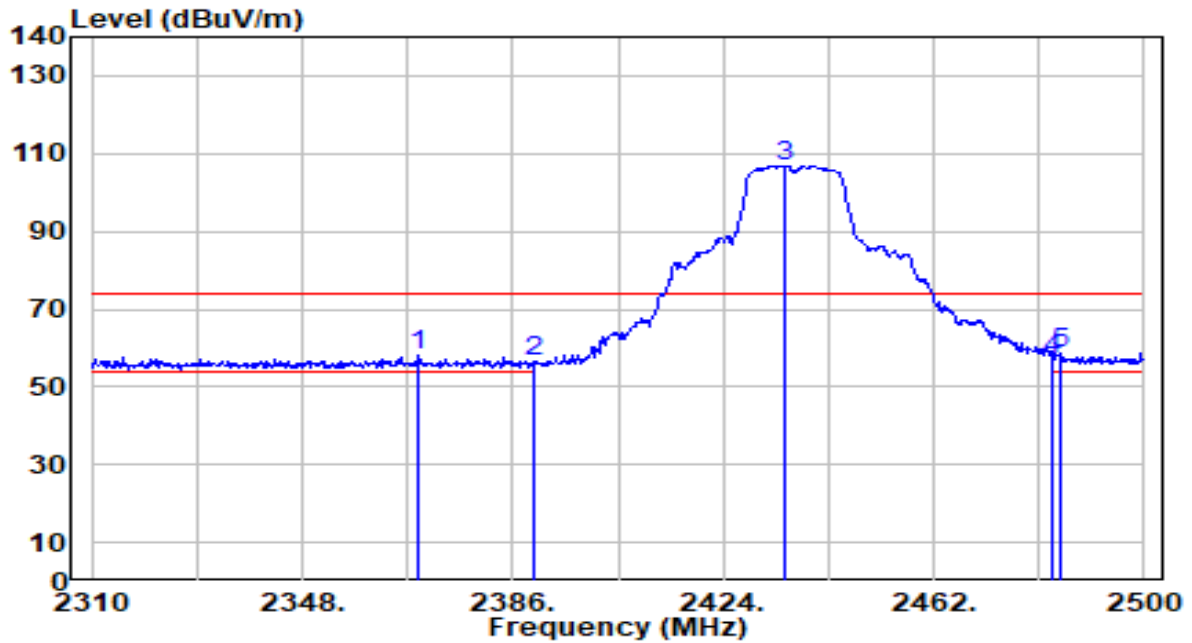


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2369.090	28.17	29.97	58.13	-15.87	74.00	139	37	Peak
2	2390.000	26.50	29.99	56.49	-17.51	74.00	139	37	Peak
3	2435.020	76.58	30.12	106.70	N/A	N/A	139	37	Peak
4	2483.500	26.94	30.29	57.23	-16.77	74.00	139	37	Peak
5	* 2484.990	28.39	30.29	58.68	-15.32	74.00	139	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

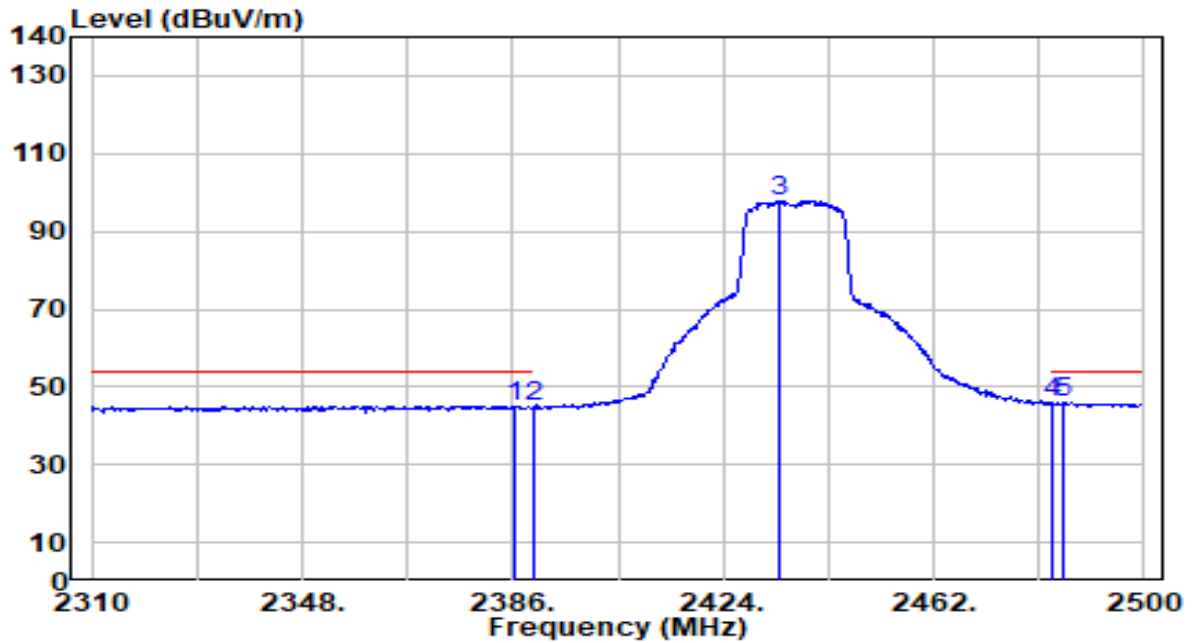


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	15.14	29.99	45.13	-8.87	54.00	139	37	Average
2	2390.000	14.98	29.99	44.97	-9.03	54.00	139	37	Average
3	2434.260	67.74	30.12	97.86	N/A	N/A	139	37	Average
4	2483.500	15.43	30.29	45.72	-8.28	54.00	139	37	Average
5	* 2485.180	15.65	30.29	45.94	-8.06	54.00	139	37	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

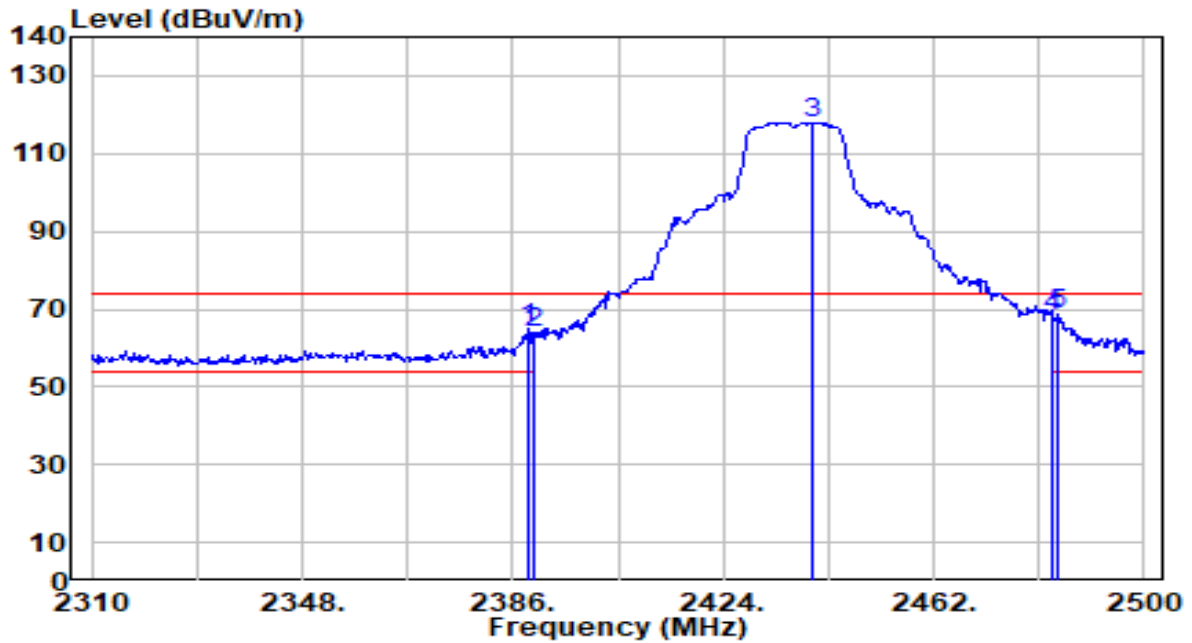


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	34.89	29.99	64.88	-9.12	74.00	165	36	Peak
2	2390.000	33.74	29.99	63.73	-10.27	74.00	165	36	Peak
3	2439.960	87.92	30.14	118.06	N/A	N/A	165	36	Peak
4	2483.500	37.85	30.29	68.14	-5.86	74.00	165	36	Peak
5	* 2484.230	38.39	30.29	68.68	-5.32	74.00	165	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

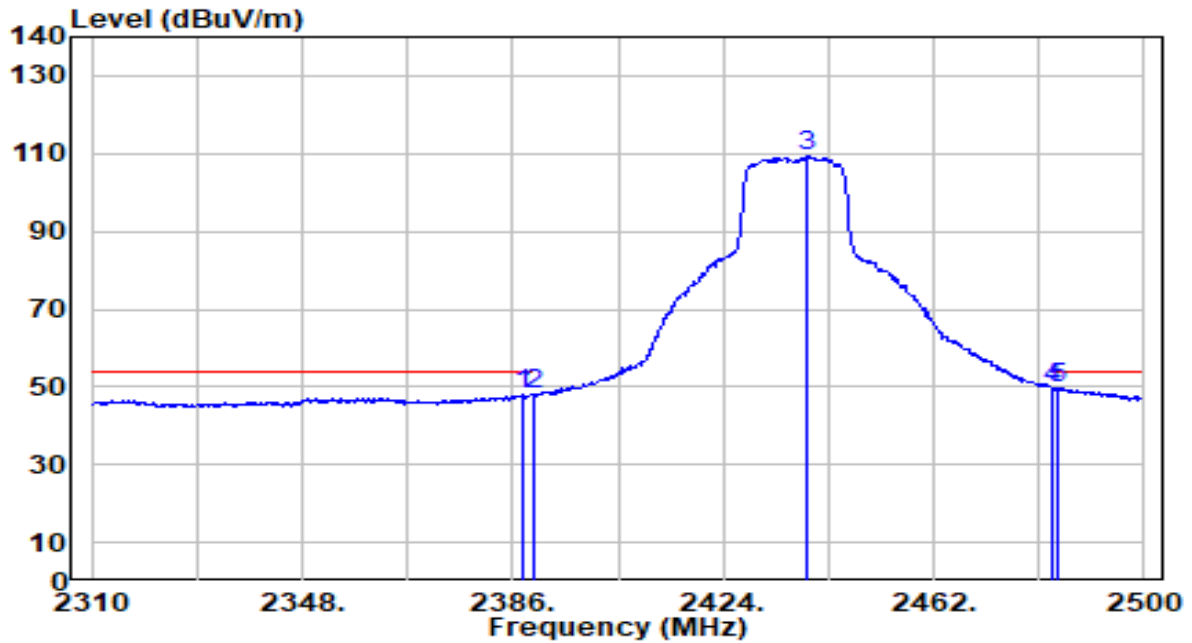


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	17.93	29.99	47.92	-6.08	54.00	165	36	Average
2	2390.000	17.91	29.99	47.90	-6.10	54.00	165	36	Average
3	2439.200	79.24	30.14	109.38	N/A	N/A	165	36	Average
4	* 2483.500	19.45	30.29	49.73	-4.27	54.00	165	36	Average
5	2484.610	19.29	30.29	49.58	-4.42	54.00	165	36	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

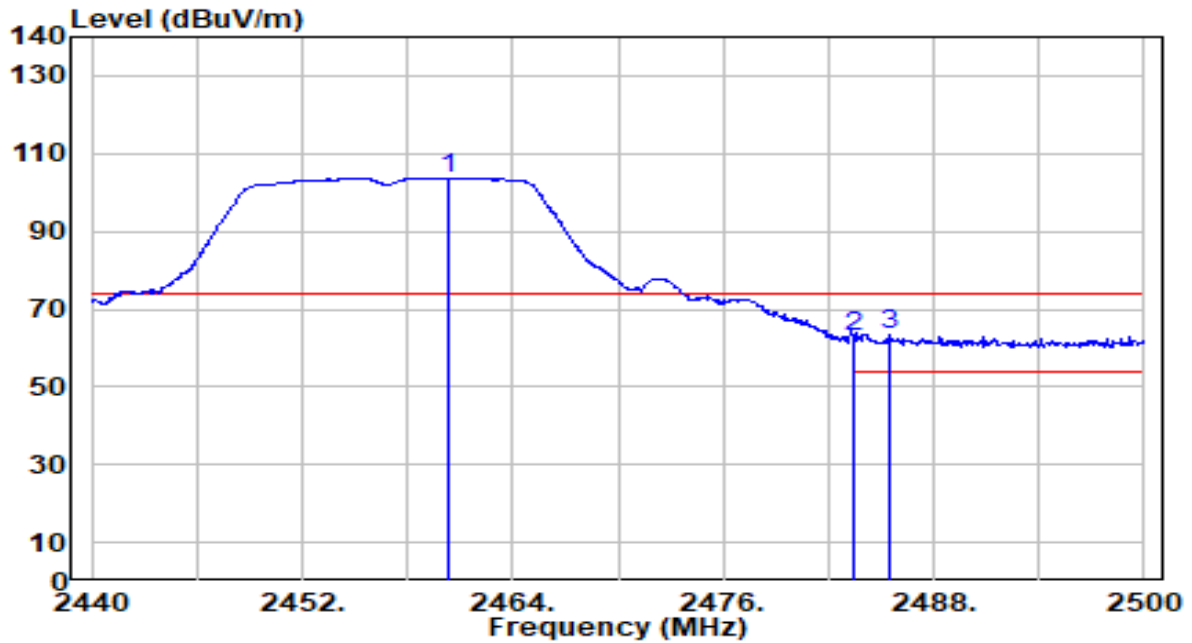


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.400	73.50	30.21	103.71	N/A	N/A	142	218	Peak
2	2483.500	32.52	30.29	62.80	-11.20	74.00	142	218	Peak
3	* 2485.480	33.13	30.29	63.42	-10.58	74.00	142	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

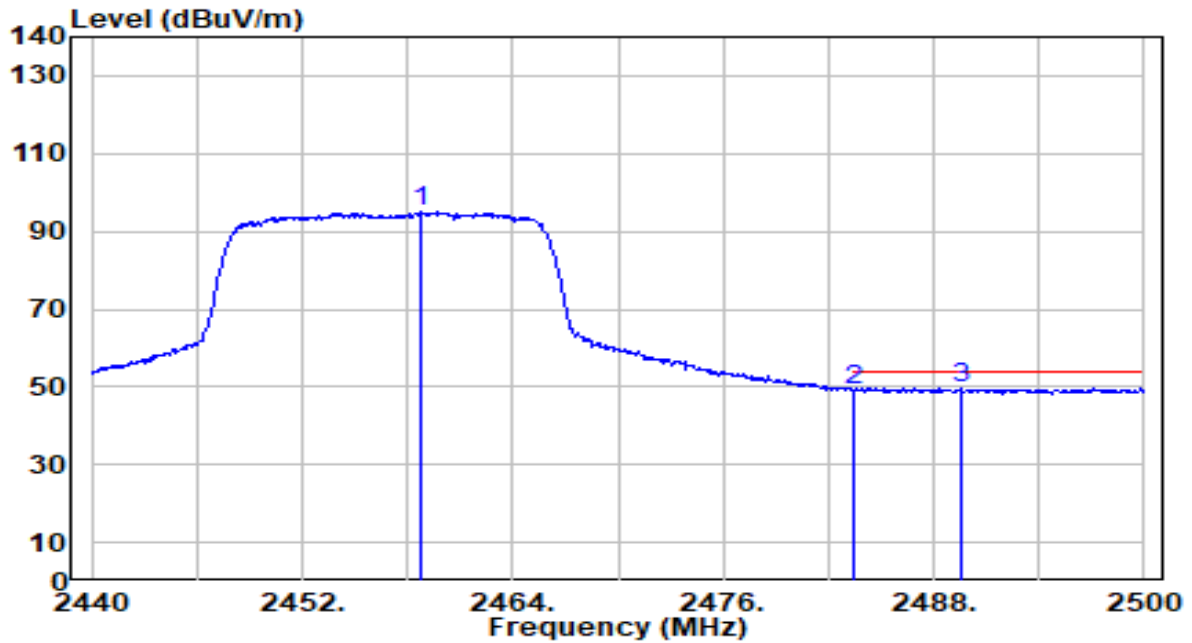


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.780	64.72	30.20	94.92	N/A	N/A	142	218	Average
2	2483.500	18.77	30.29	49.05	-4.95	54.00	142	218	Average
3	* 2489.500	19.23	30.31	49.54	-4.46	54.00	142	218	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

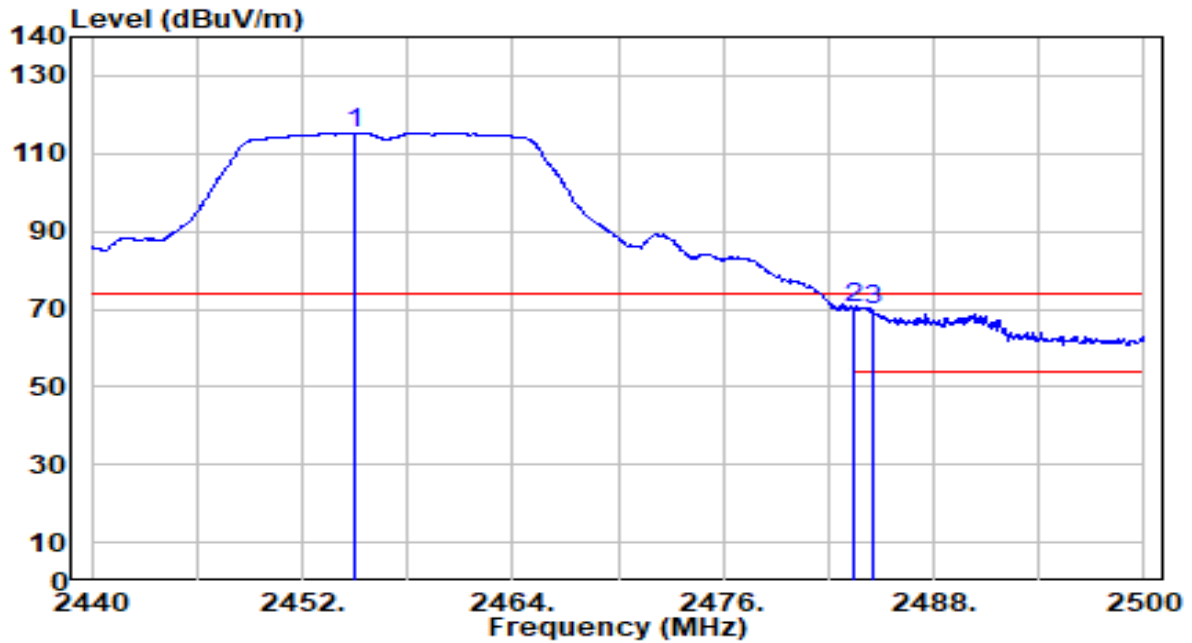


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.940	85.01	30.19	115.20	N/A	N/A	166	321	Peak
2	* 2483.500	39.80	30.29	70.08	-3.92	74.00	166	321	Peak
3	2484.520	39.38	30.29	69.67	-4.33	74.00	166	321	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

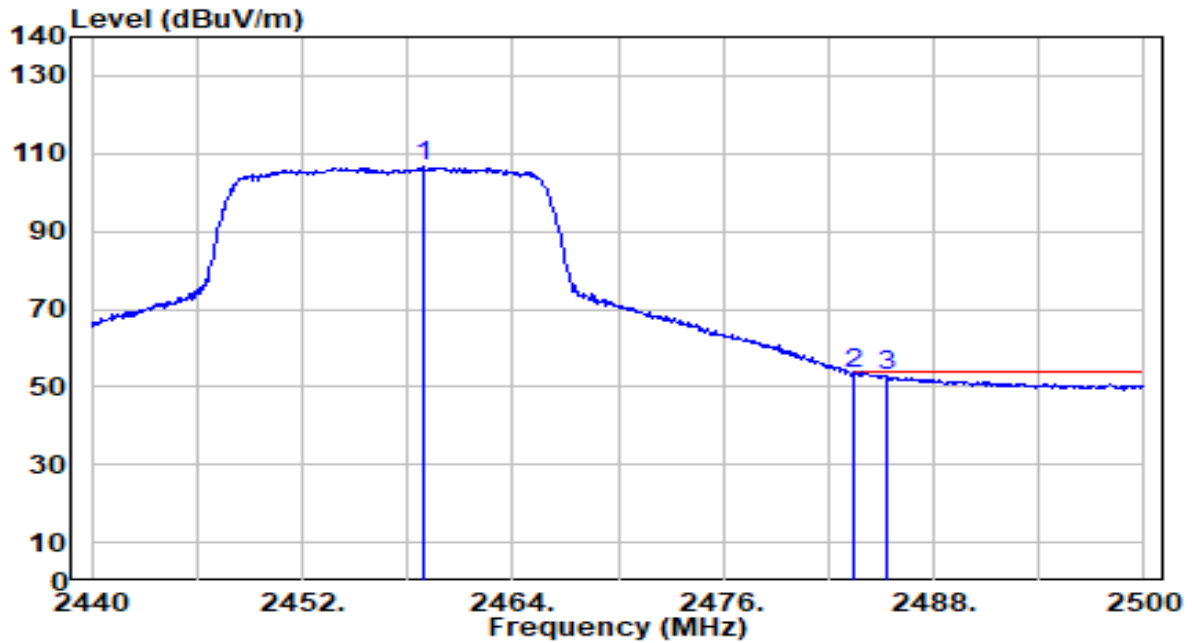


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.900	76.27	30.20	106.48	N/A	N/A	166	321	Average
2	* 2483.500	22.95	30.29	53.24	-0.76	54.00	166	321	Average
3	2485.300	22.58	30.29	52.87	-1.13	54.00	166	321	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

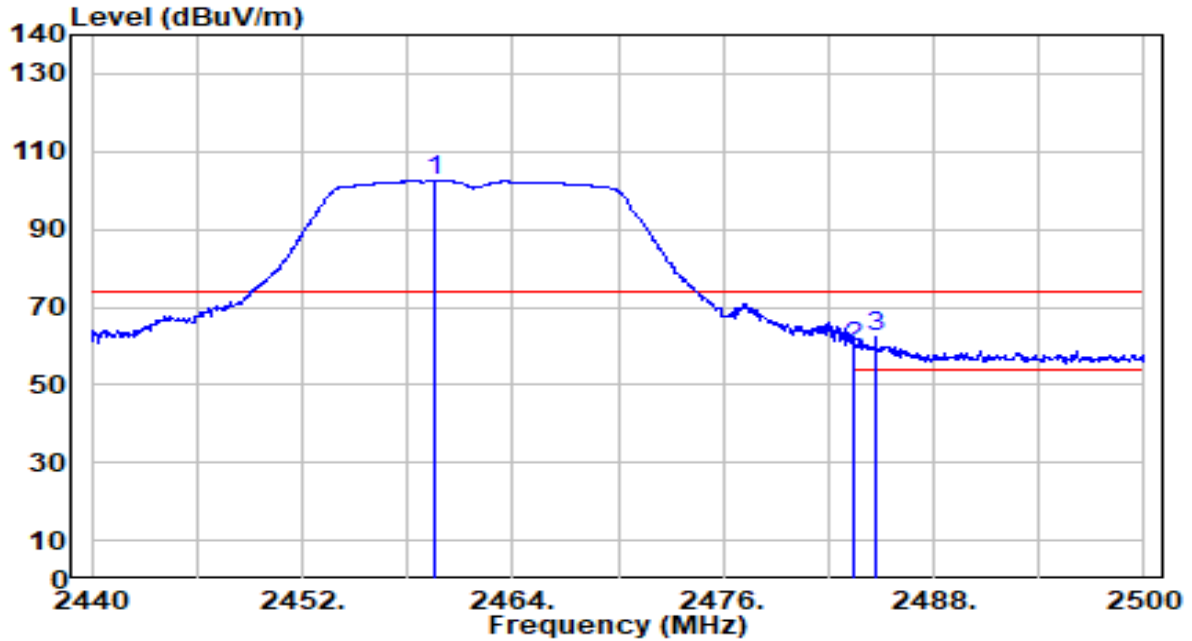


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.560	72.26	30.21	102.46	N/A	N/A	142	211	Peak
2	2483.500	29.64	30.29	59.93	-14.07	74.00	142	211	Peak
3	* 2484.700	32.29	30.29	62.58	-11.42	74.00	142	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

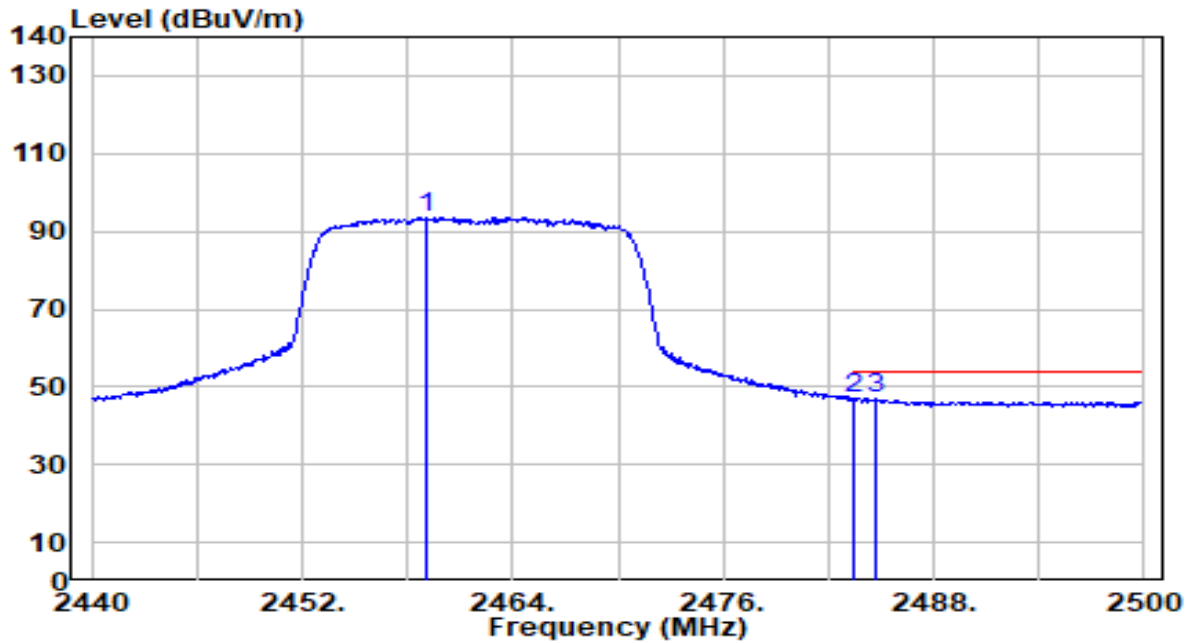


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.140	63.34	30.20	93.54	N/A	N/A	142	211	Average
2	2483.500	16.51	30.29	46.80	-7.20	54.00	142	211	Average
3	* 2484.700	16.57	30.29	46.86	-7.14	54.00	142	211	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

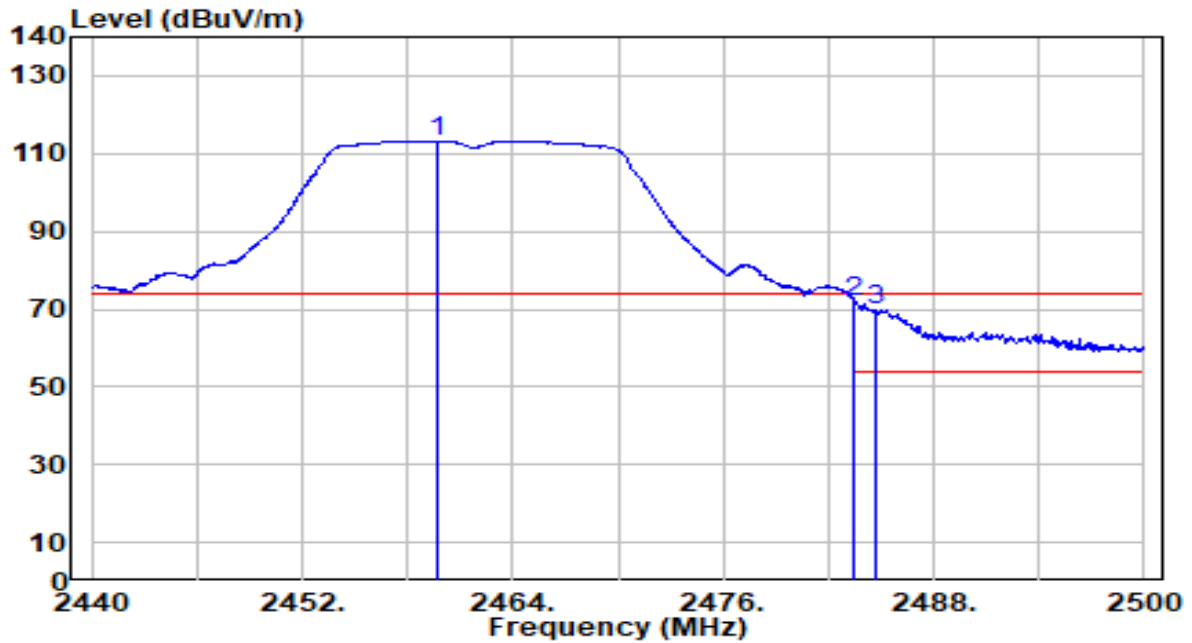


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.680	82.90	30.21	113.11	N/A	N/A	166	330	Peak
2	* 2483.500	41.44	30.29	71.73	-2.27	74.00	166	330	Peak
3	2484.700	39.36	30.29	69.65	-4.35	74.00	166	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

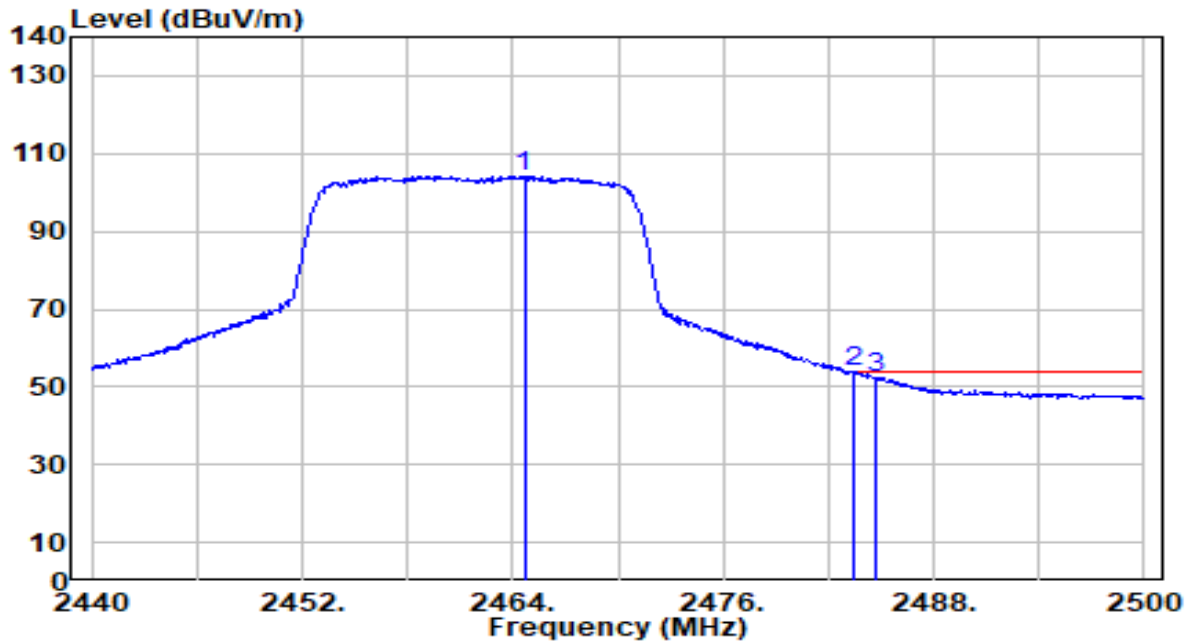


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.660	74.08	30.22	104.30	N/A	N/A	166	330	Average
2	* 2483.500	23.55	30.29	53.83	-0.17	54.00	166	330	Average
3	2484.700	22.26	30.29	52.54	-1.46	54.00	166	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

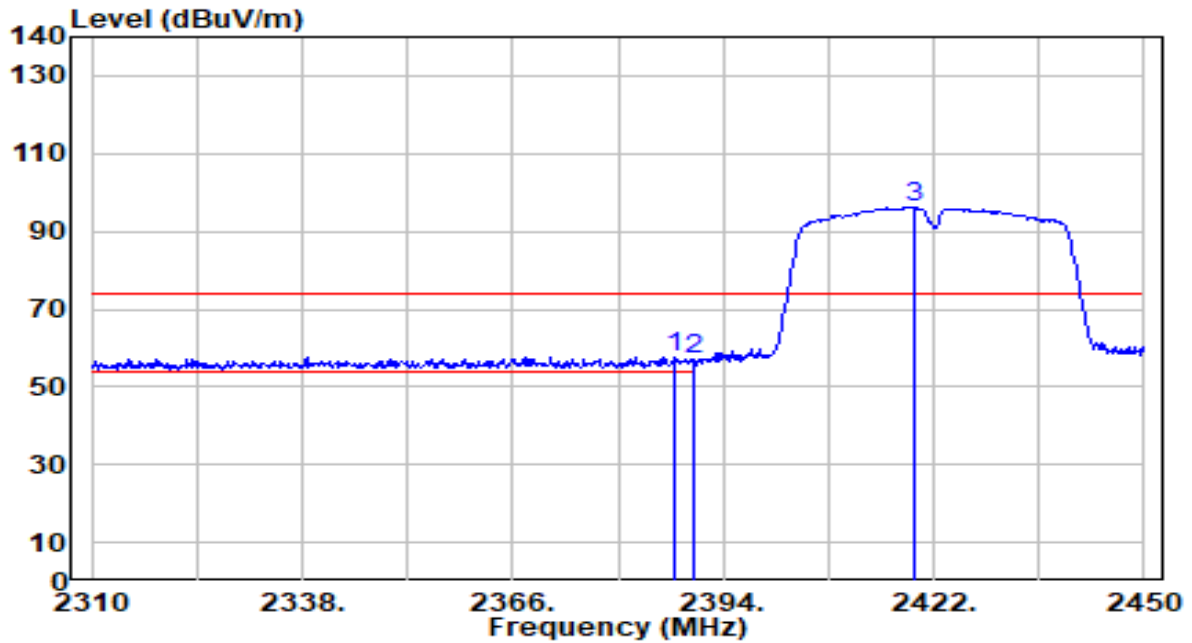


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.560	27.68	29.99	57.67	-16.33	74.00	261	255	Peak
2		2390.000	27.31	29.99	57.30	-16.70	74.00	261	255	Peak
3		2419.480	65.96	30.07	96.04	N/A	N/A	261	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

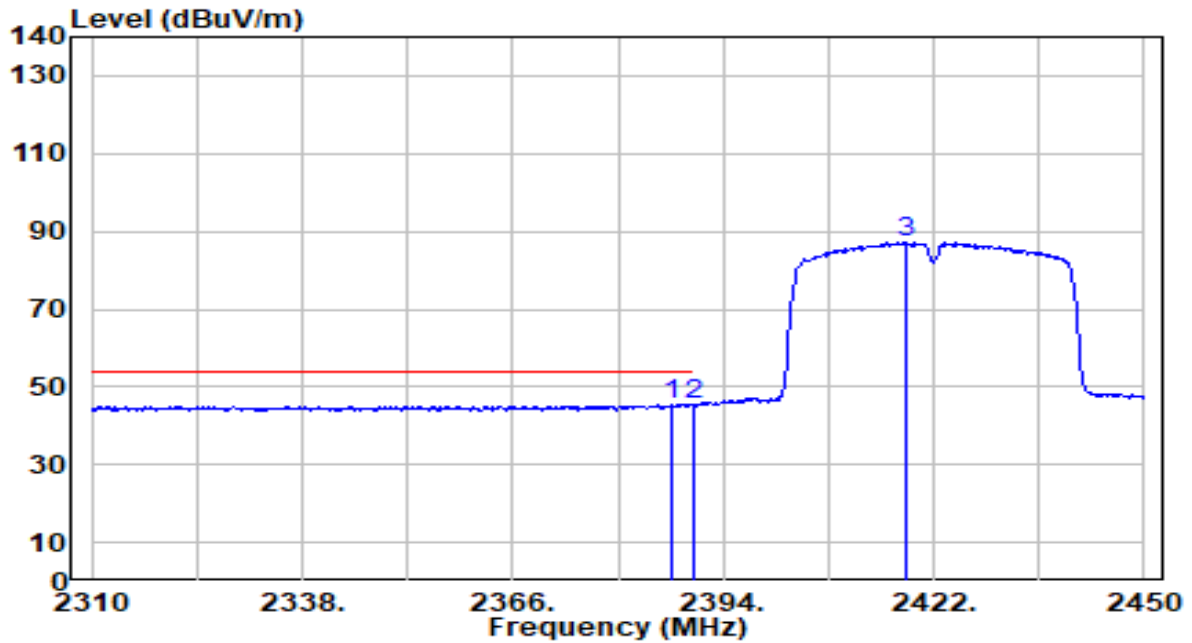


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	15.47	29.99	45.46	-8.54	54.00	261	255	Average
2	* 2390.000	15.52	29.99	45.52	-8.48	54.00	261	255	Average
3	2418.360	57.14	30.07	87.21	N/A	N/A	261	255	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

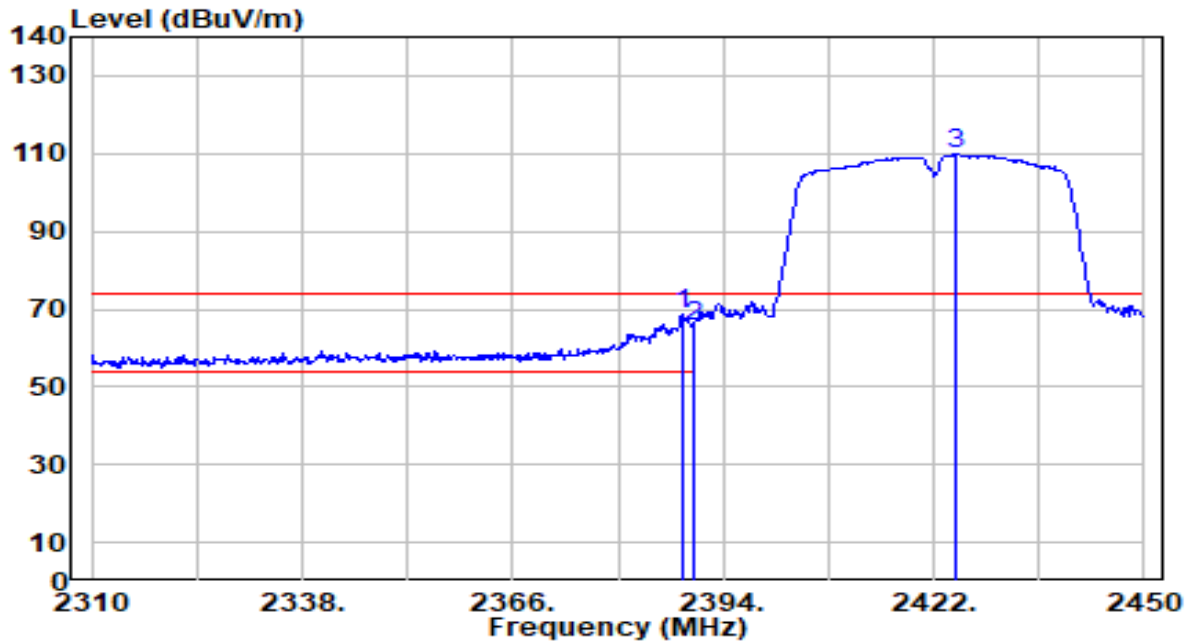


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.680	38.70	29.99	68.70	-5.30	74.00	161	360	Peak
2		2390.000	35.33	29.99	65.32	-8.68	74.00	161	360	Peak
3		2424.800	79.63	30.09	109.72	N/A	N/A	161	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

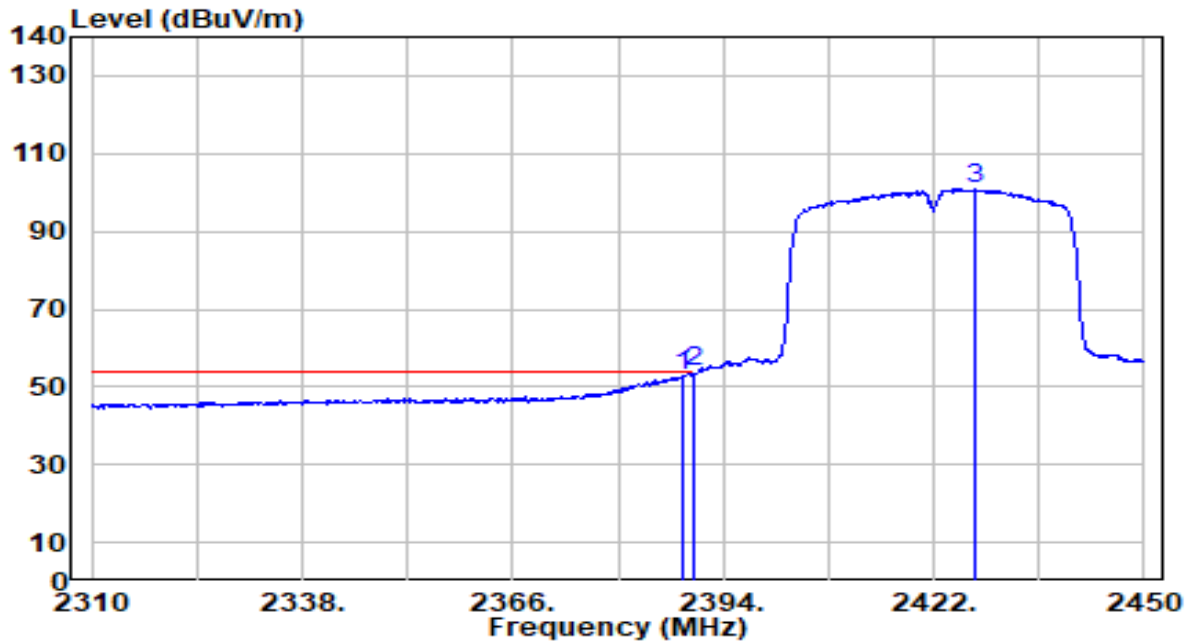


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.680	22.98	29.99	52.97	-1.03	54.00	161	360	Average
2	* 2390.000	23.82	29.99	53.81	-0.19	54.00	161	360	Average
3	2427.600	70.77	30.10	100.87	N/A	N/A	161	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

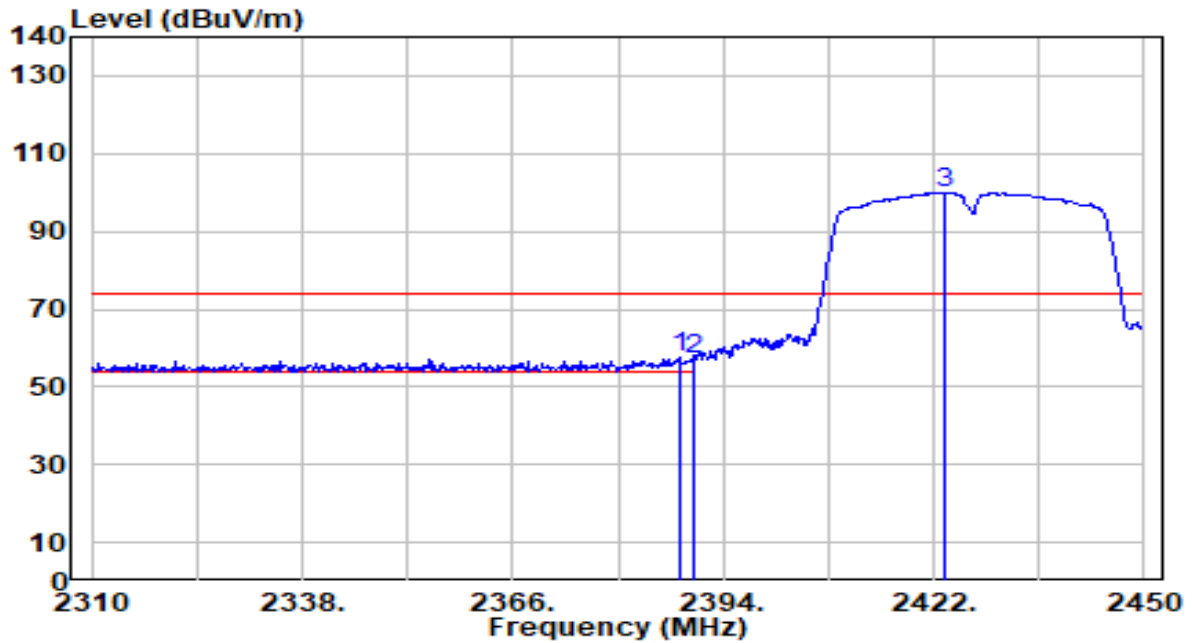


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.120	27.43	29.99	57.42	-16.58	74.00	138	113	Peak
2		2390.000	26.87	29.99	56.86	-17.14	74.00	138	113	Peak
3		2423.540	69.98	30.09	100.07	N/A	N/A	138	113	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

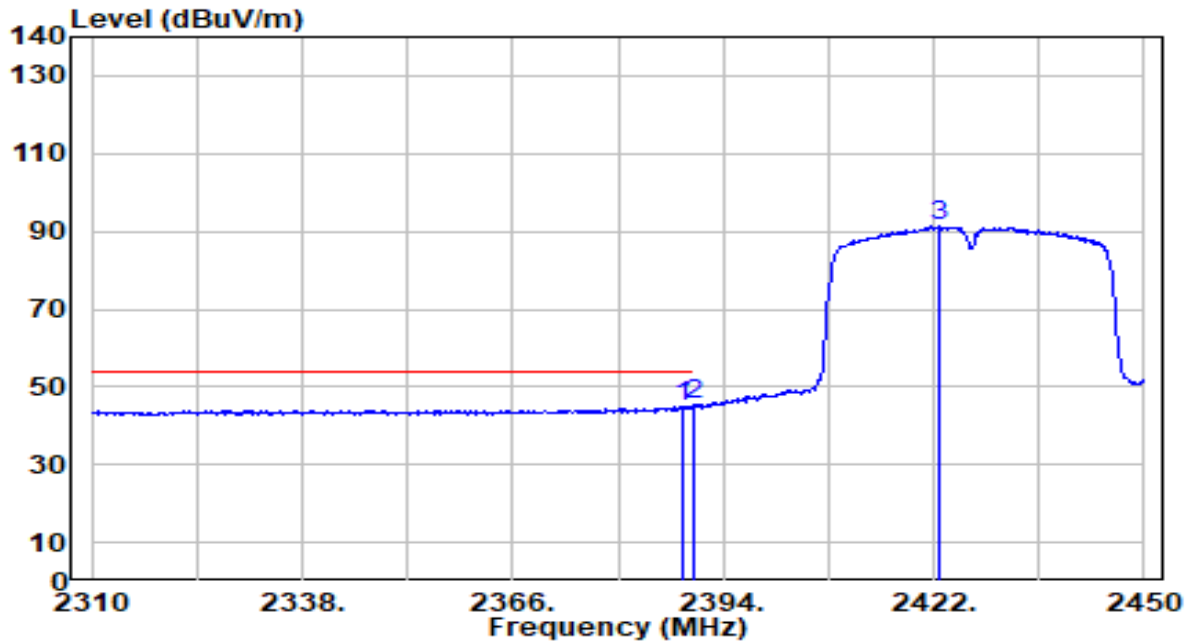


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.540	15.00	29.99	44.99	-9.01	54.00	138	113	Average
2	* 2390.000	15.18	29.99	45.17	-8.83	54.00	138	113	Average
3	2422.840	61.08	30.08	91.16	N/A	N/A	138	113	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

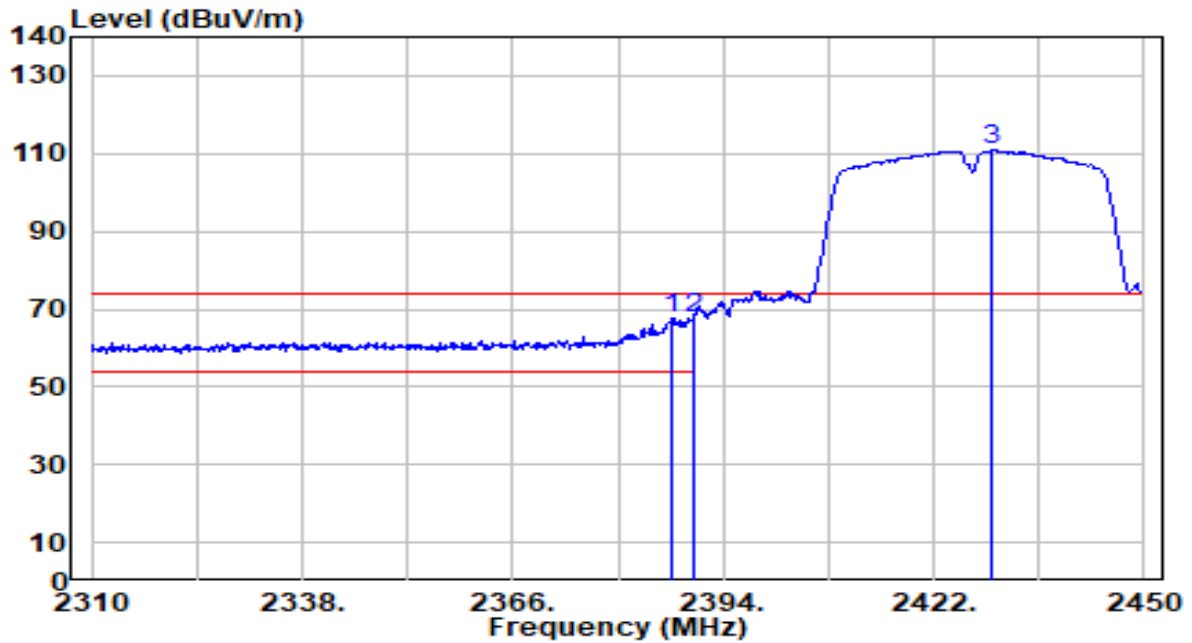


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.280	37.53	29.99	67.52	-6.48	74.00	161	360	Peak
2	* 2390.000	37.71	29.99	67.70	-6.30	74.00	161	360	Peak
3	2429.840	80.61	30.11	110.72	N/A	N/A	161	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

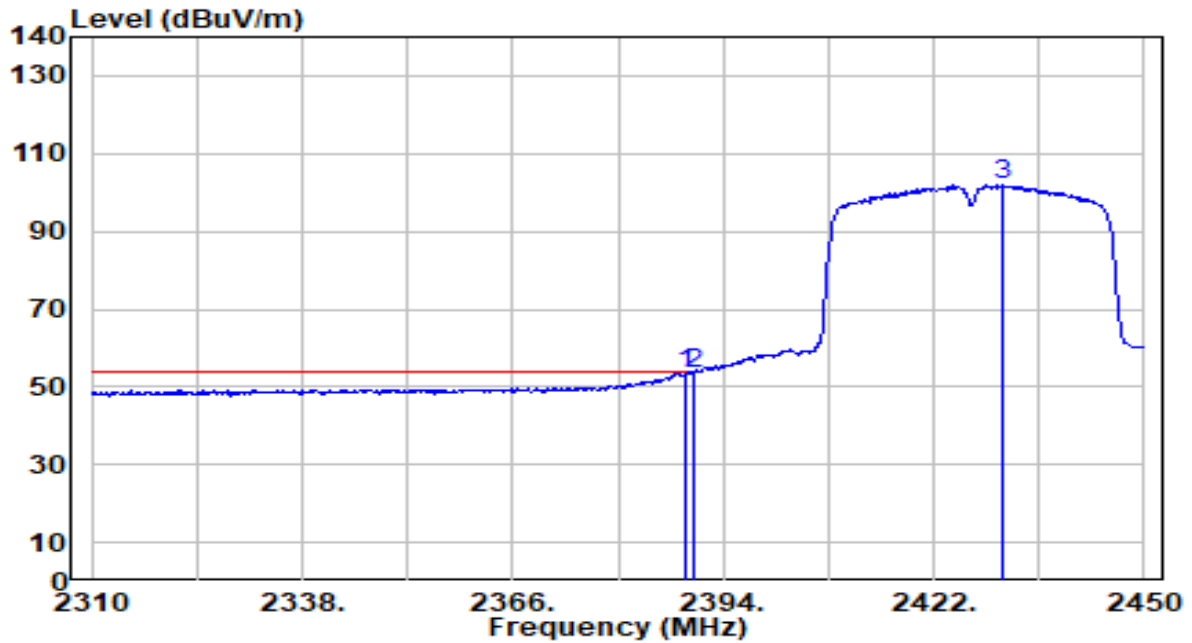


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.820	23.41	29.99	53.40	-0.60	54.00	161	360	Average
2	* 2390.000	23.63	29.99	53.62	-0.38	54.00	161	360	Average
3	2431.100	71.90	30.11	102.01	N/A	N/A	161	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

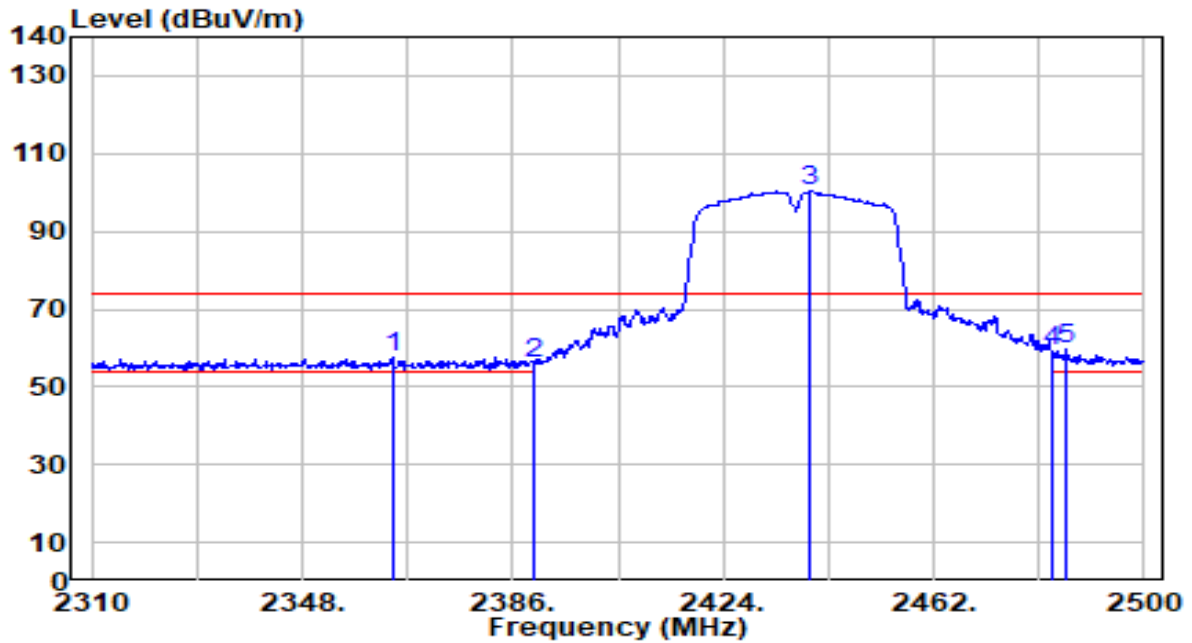


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2364.340	27.64	29.96	57.60	-16.40	74.00	138	37	Peak
2	2390.000	26.06	29.99	56.05	-17.95	74.00	138	37	Peak
3	2439.770	70.03	30.14	100.17	N/A	N/A	138	37	Peak
4	2483.500	29.08	30.29	59.37	-14.63	74.00	138	37	Peak
5	* 2485.940	29.44	30.29	59.74	-14.26	74.00	138	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

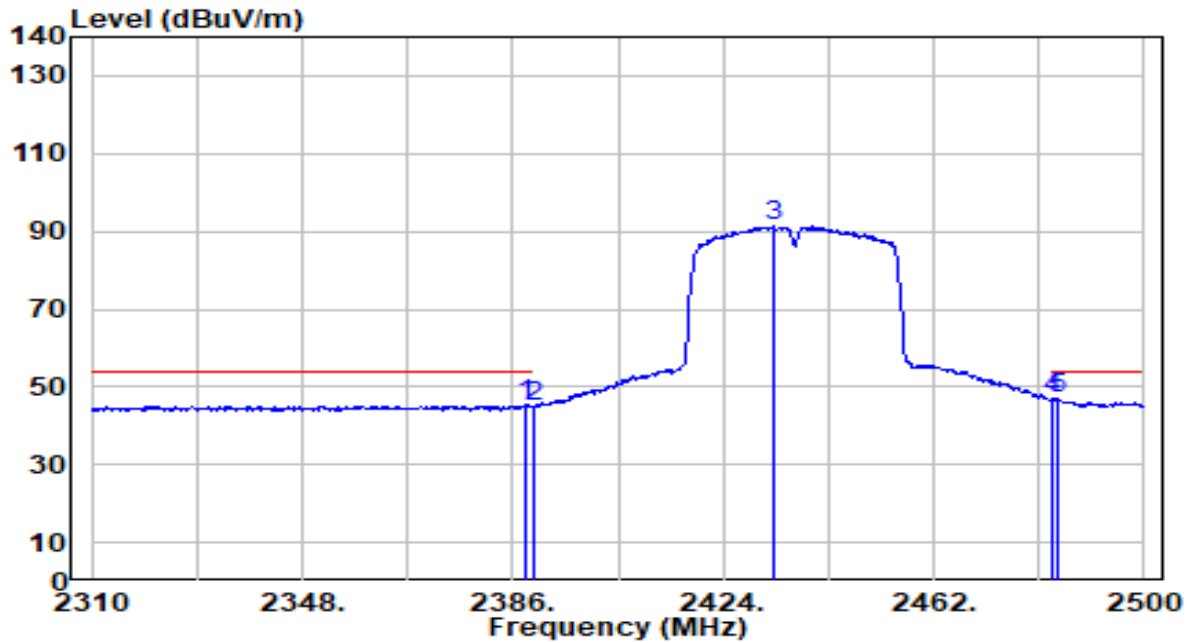


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	15.63	29.99	45.62	-8.38	54.00	138	37	Average
2	2390.000	14.72	29.99	44.72	-9.28	54.00	138	37	Average
3	2433.120	61.30	30.12	91.41	N/A	N/A	138	37	Average
4	* 2483.500	16.87	30.29	47.15	-6.85	54.00	138	37	Average
5	2484.230	16.65	30.29	46.94	-7.06	54.00	138	37	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

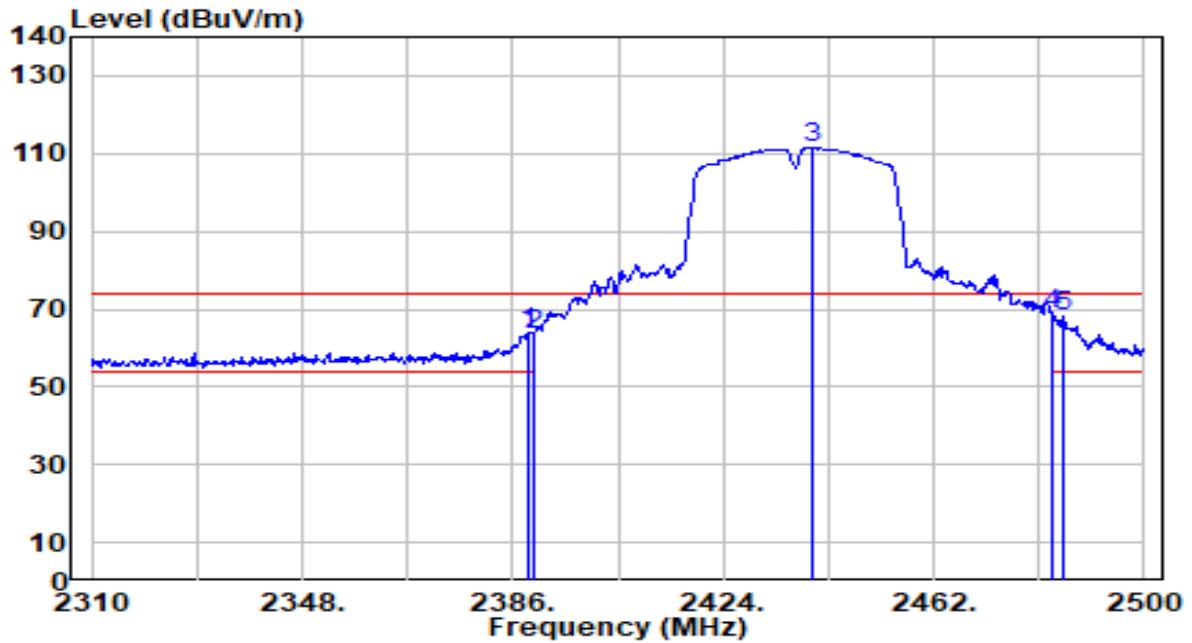


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	33.98	29.99	63.98	-10.02	74.00	154	37	Peak
2	2390.000	33.46	29.99	63.46	-10.54	74.00	154	37	Peak
3	2440.150	81.55	30.14	111.69	N/A	N/A	154	37	Peak
4	* 2483.500	38.56	30.29	68.84	-5.16	74.00	154	37	Peak
5	2485.180	37.90	30.29	68.19	-5.81	74.00	154	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

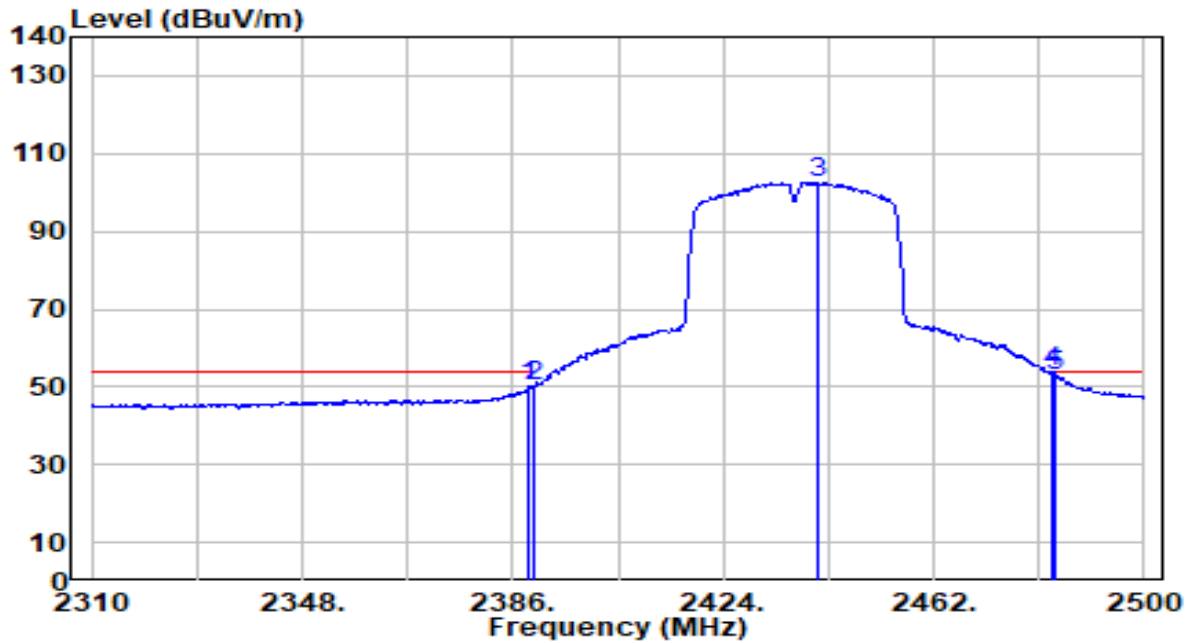


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	20.18	29.99	50.17	-3.83	54.00	154	37	Average
2	2390.000	20.40	29.99	50.39	-3.61	54.00	154	37	Average
3	2441.290	72.52	30.15	102.66	N/A	N/A	154	37	Average
4	* 2483.500	23.55	30.29	53.83	-0.17	54.00	154	37	Average
5	2484.040	22.46	30.29	52.75	-1.25	54.00	154	37	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

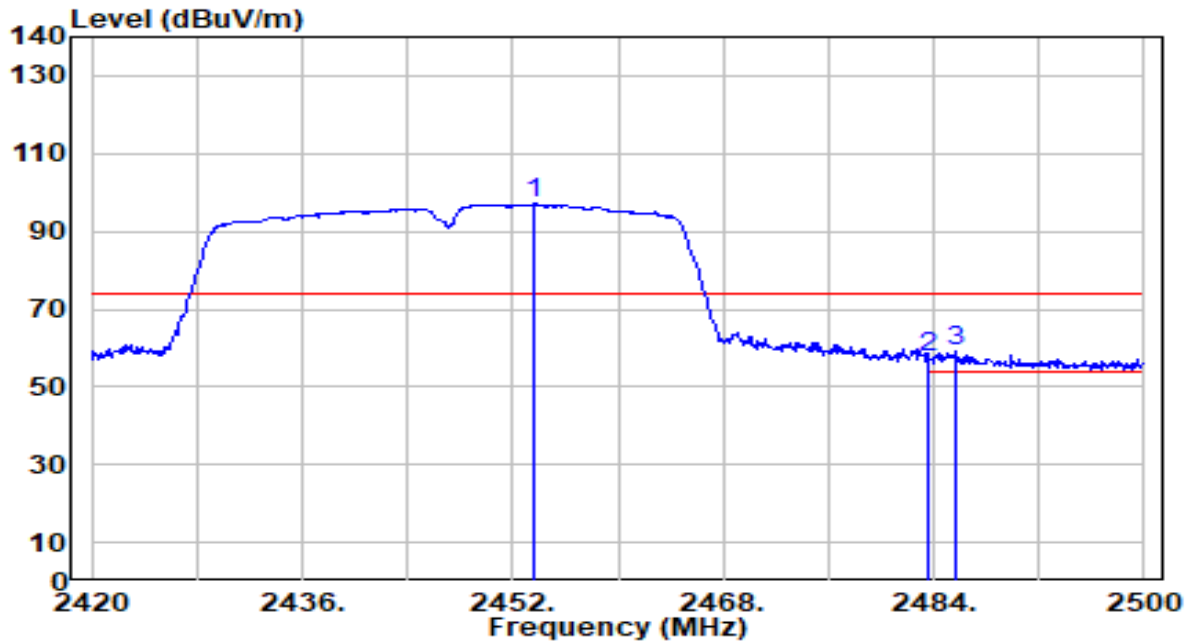


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.600	66.84	30.19	97.02	N/A	N/A	142	218	Peak
2	2483.500	27.26	30.29	57.55	-16.45	74.00	142	218	Peak
3	* 2485.760	28.68	30.29	58.97	-15.03	74.00	142	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

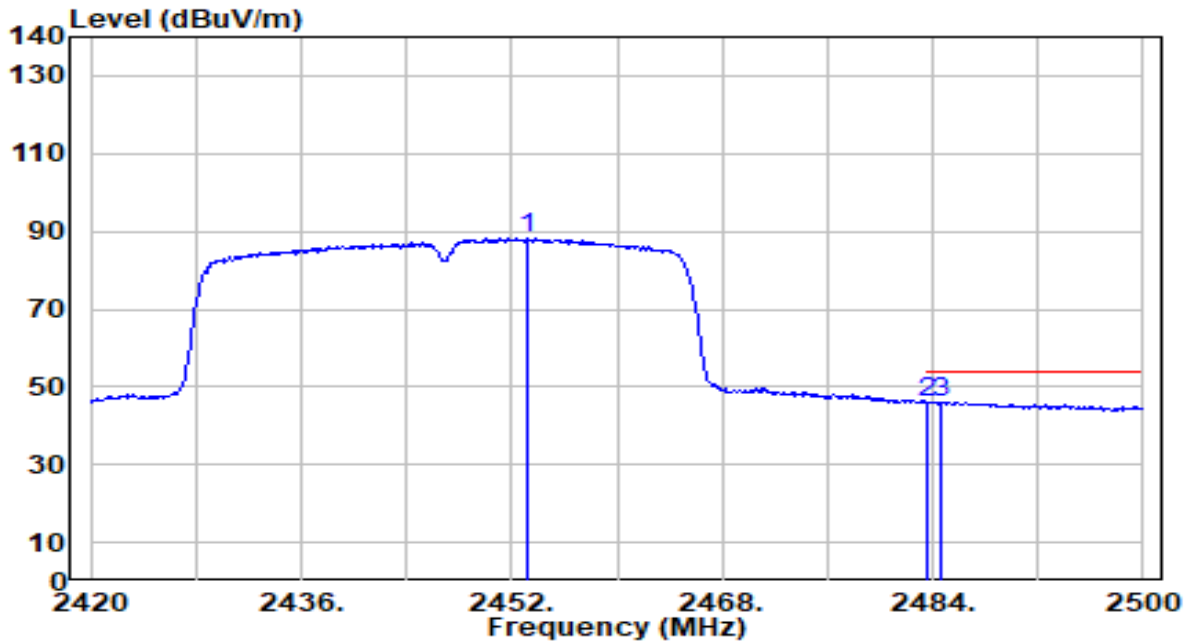


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.120	58.11	30.18	88.30	N/A	N/A	142	218	Average
2	* 2483.500	15.89	30.29	46.18	-7.82	54.00	142	218	Average
3	2484.720	15.85	30.29	46.14	-7.86	54.00	142	218	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

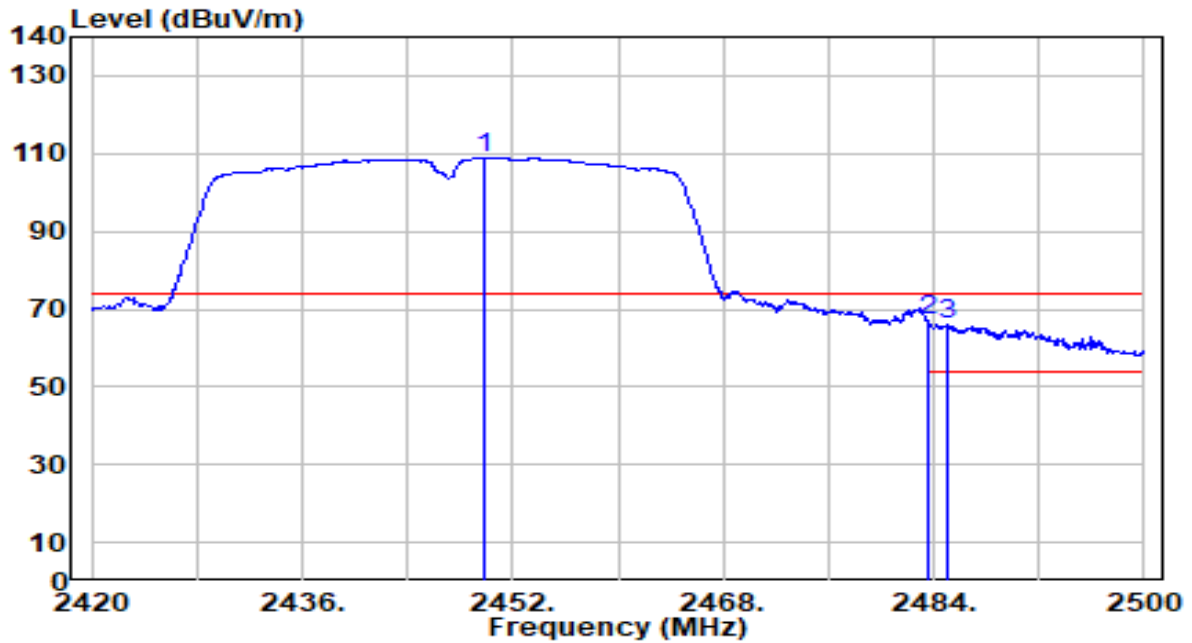


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.840	78.77	30.17	108.94	N/A	N/A	168	322	Peak
2	* 2483.500	36.55	30.29	66.83	-7.17	74.00	168	322	Peak
3	2485.040	35.89	30.29	66.18	-7.82	74.00	168	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-17
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

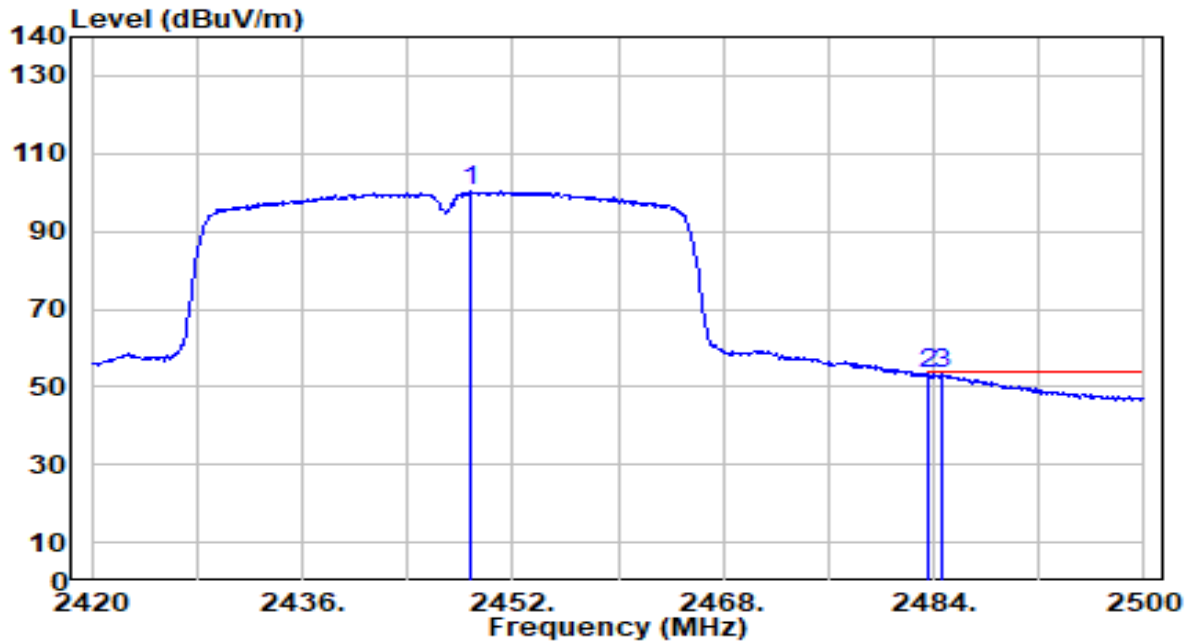


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.720	70.12	30.17	100.29	N/A	N/A	168	322	Average
2	2483.500	22.88	30.29	53.17	-0.83	54.00	168	322	Average
3	* 2484.640	22.89	30.29	53.18	-0.82	54.00	168	322	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

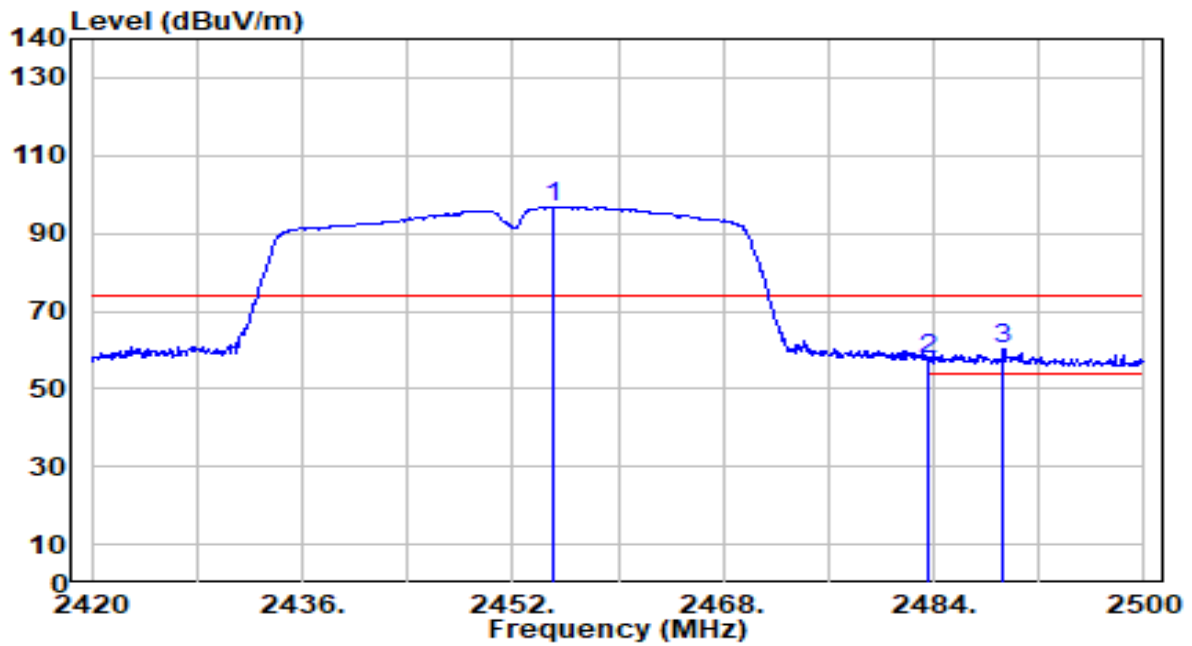


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.120	66.67	30.19	96.86	N/A	N/A	142	210	Peak
2	2483.500	27.17	30.29	57.46	-16.54	74.00	142	210	Peak
3	* 2489.280	29.99	30.30	60.30	-13.70	74.00	142	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

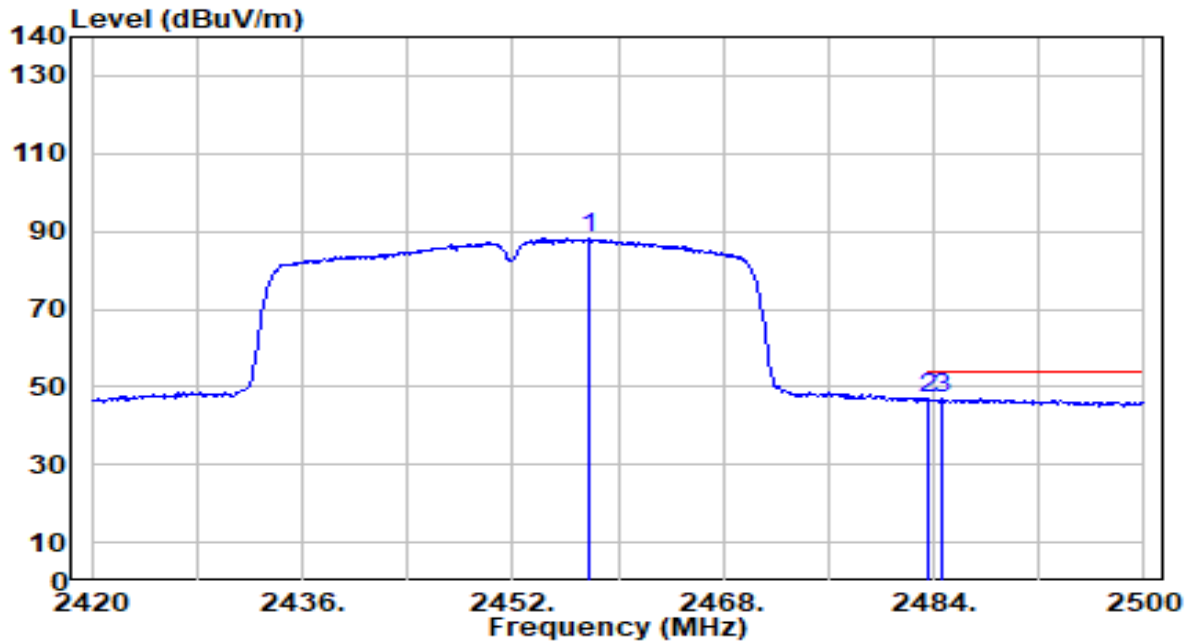


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.760	57.95	30.20	88.15	N/A	N/A	142	210	Average
2	* 2483.500	16.59	30.29	46.87	-7.13	54.00	142	210	Average
3	2484.720	16.51	30.29	46.80	-7.20	54.00	142	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

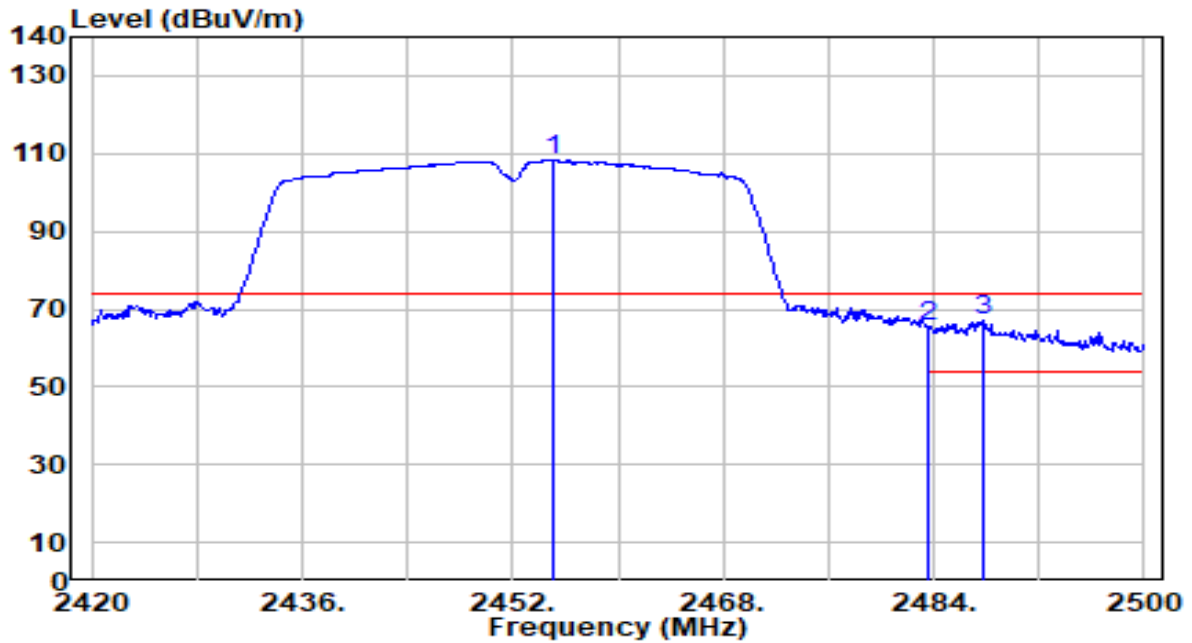


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.040	78.02	30.19	108.21	N/A	N/A	166	331	Peak
2	2483.500	35.31	30.29	65.60	-8.40	74.00	166	331	Peak
3	* 2487.680	36.81	30.30	67.11	-6.89	74.00	166	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-13
Factor	DRH18-E	Temp. / Humidity	22°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

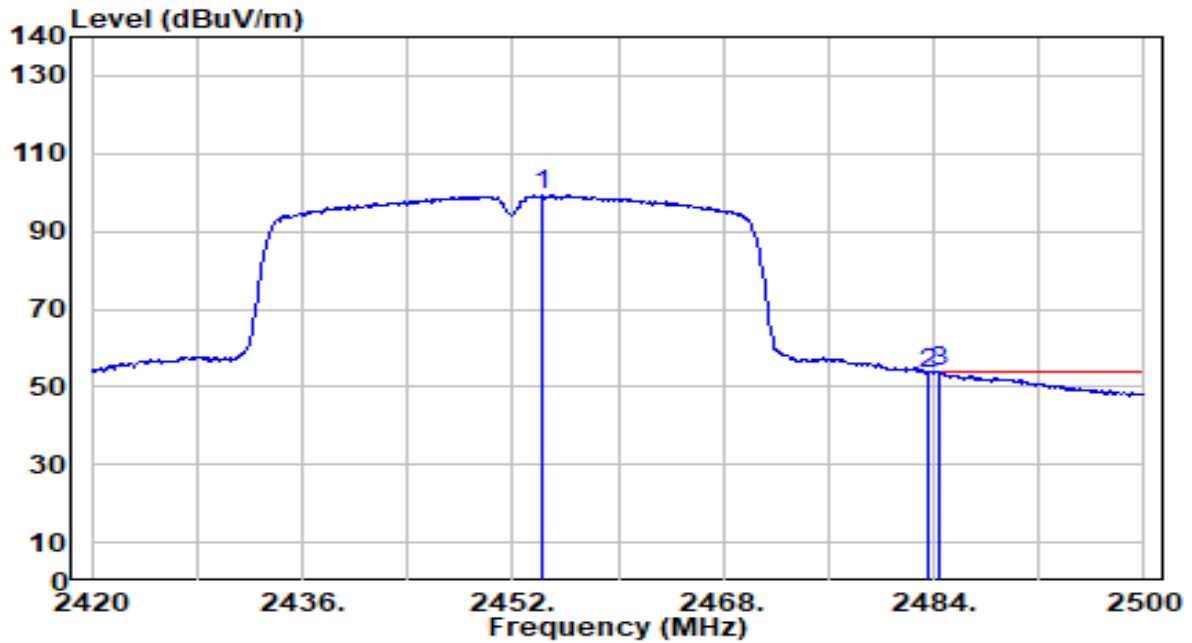

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.160	69.25	30.19	99.44	N/A	N/A	166	331	Average
2	2483.500	23.25	30.29	53.53	-0.47	54.00	166	331	Average
3	* 2484.480	23.60	30.29	53.89	-0.11	54.00	166	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

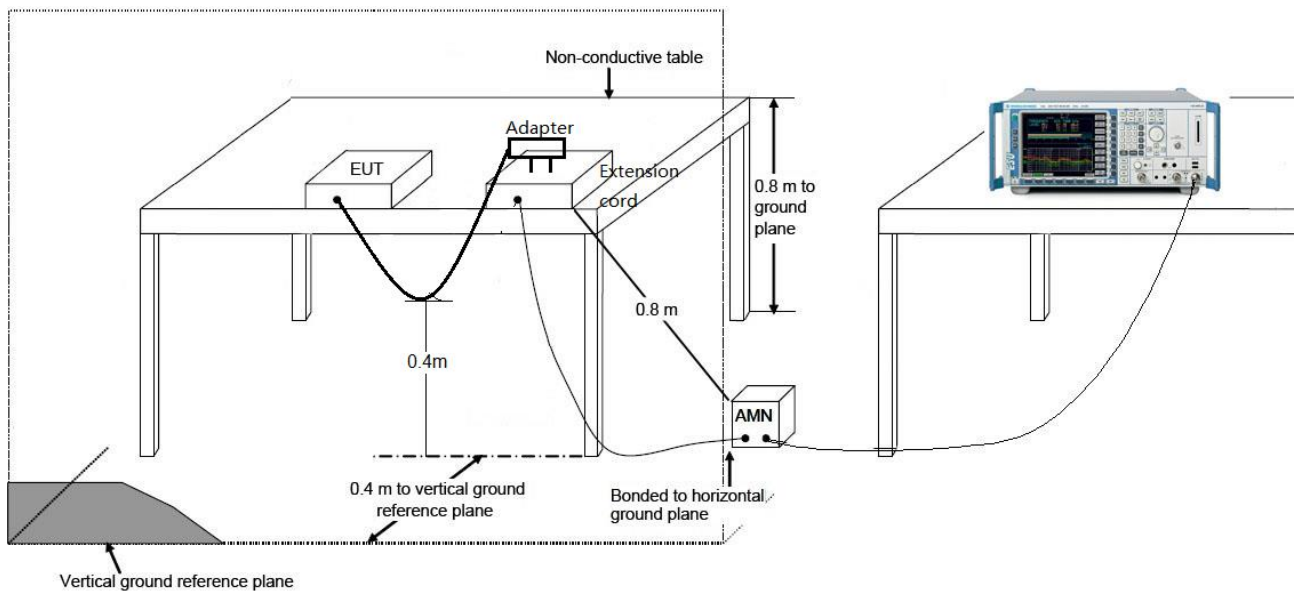

7.8.3. Test Result

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-19
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.4°C /51%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

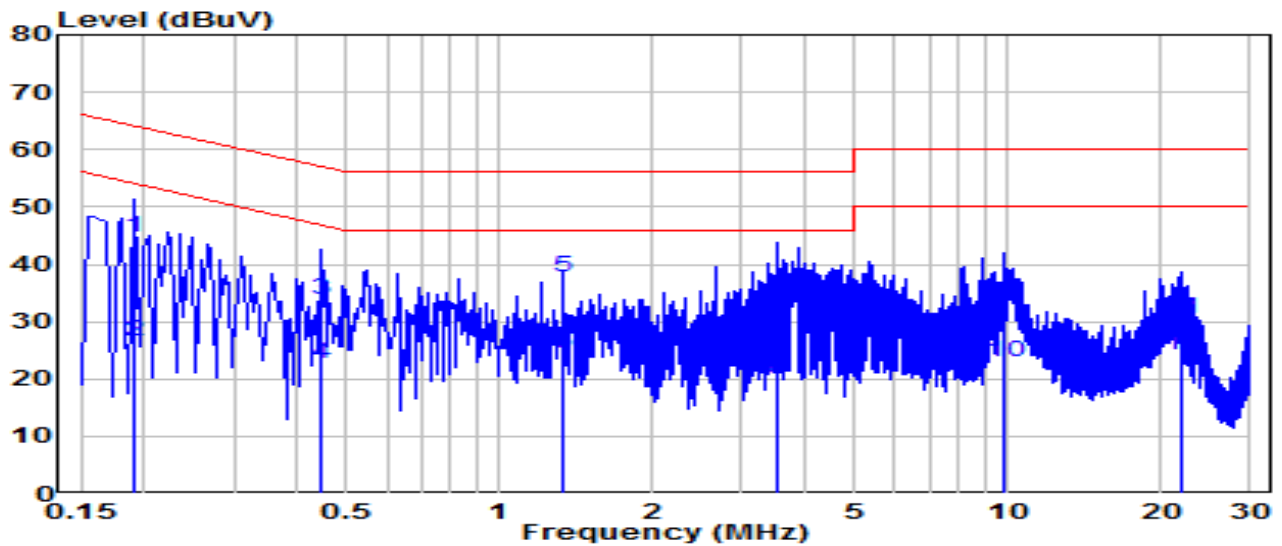


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.190	34.99	9.62	44.61	-19.40	64.01	QP
2	0.190	16.99	9.62	26.61	-27.40	54.01	Average
3	0.442	24.05	9.64	33.68	-23.33	57.02	QP
4	0.442	13.08	9.64	22.72	-24.29	47.02	Average
5	* 1.333	28.11	9.68	37.79	-18.21	56.00	QP
6	* 1.333	14.72	9.68	24.40	-21.60	46.00	Average
7	3.511	24.56	9.72	34.28	-21.72	56.00	QP
8	3.511	10.25	9.72	19.97	-26.03	46.00	Average
9	9.847	23.38	9.86	33.23	-26.77	60.00	QP
10	9.847	12.99	9.86	22.84	-27.16	50.00	Average
11	21.914	20.56	9.92	30.49	-29.51	60.00	QP
12	21.914	14.32	9.92	24.24	-25.76	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-19
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.4°C /51%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

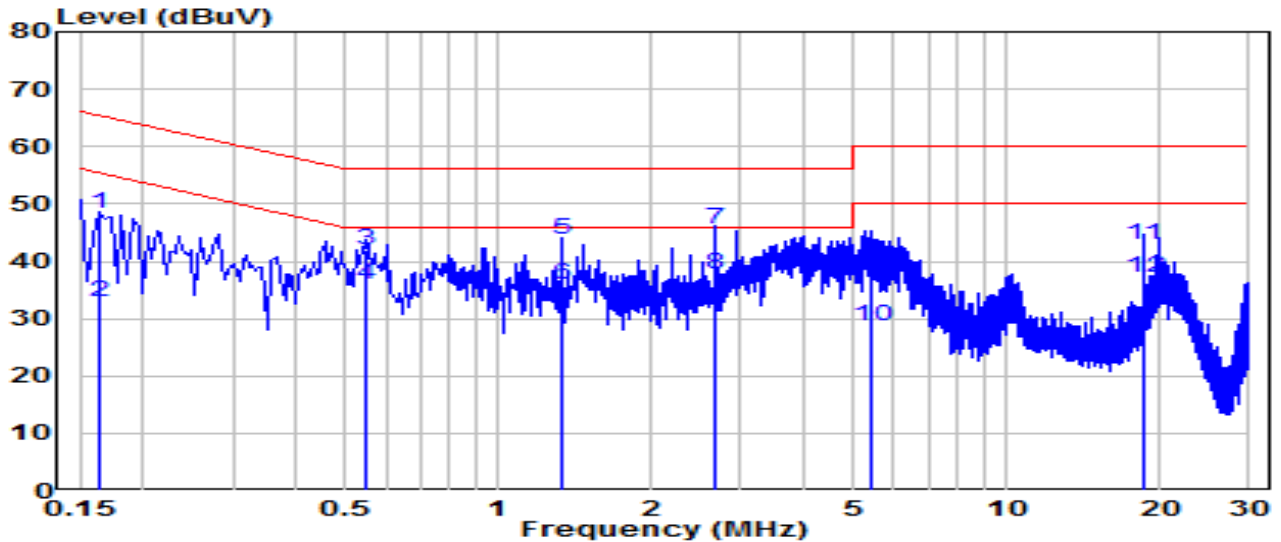


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	38.68	9.62	48.30	-16.98	65.28	QP
2	0.163	23.43	9.62	33.05	-22.24	55.28	Average
3	0.546	32.22	9.64	41.86	-14.14	56.00	QP
4	0.546	26.38	9.64	36.03	-9.97	46.00	Average
5	1.333	34.22	9.68	43.90	-12.10	56.00	QP
6	1.333	26.33	9.68	36.01	-9.99	46.00	Average
7	* 2.665	35.75	9.70	45.45	-10.55	56.00	QP
8	* 2.665	28.04	9.70	37.74	-8.26	46.00	Average
9	5.446	28.78	9.76	38.54	-21.46	60.00	QP
10	5.446	18.91	9.76	28.66	-21.34	50.00	Average
11	18.648	32.78	9.98	42.76	-17.24	60.00	QP
12	18.648	27.08	9.98	37.06	-12.94	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-19
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.4°C /51%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

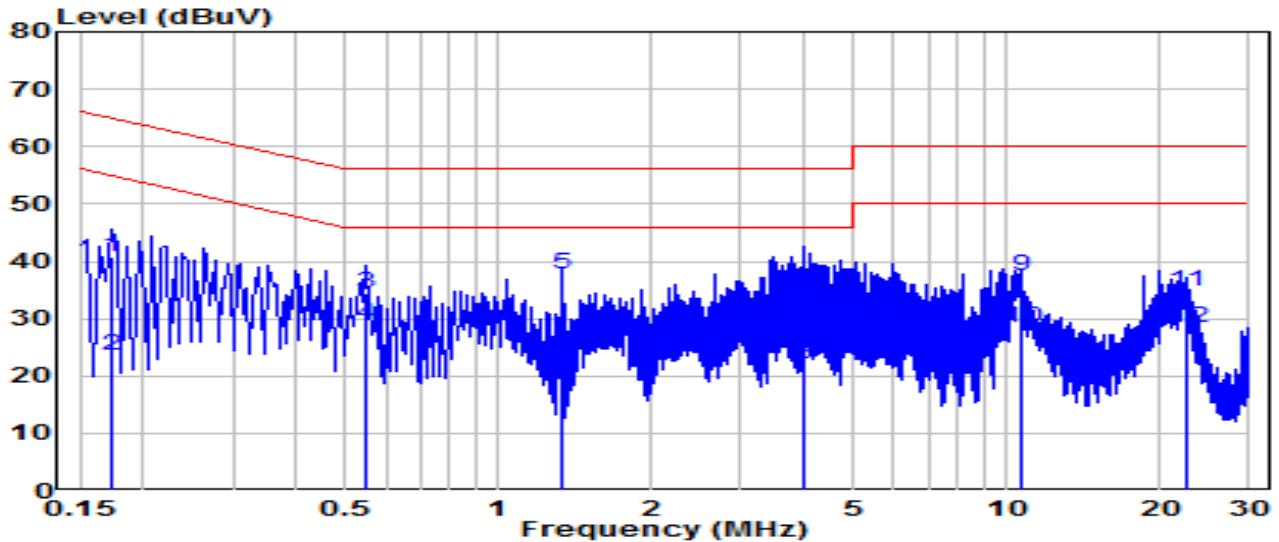


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	31.01	9.62	40.63	-24.21	64.84	QP
2	0.172	14.01	9.62	23.63	-31.21	54.84	Average
3	* 0.546	24.92	9.64	34.56	-21.44	56.00	QP
4	* 0.546	19.26	9.64	28.90	-17.10	46.00	Average
5	1.333	27.99	9.68	37.67	-18.33	56.00	QP
6	1.333	12.81	9.68	22.48	-23.52	46.00	Average
7	3.993	25.15	9.73	34.88	-21.12	56.00	QP
8	3.993	12.35	9.73	22.08	-23.92	46.00	Average
9	10.661	27.44	9.86	37.31	-22.69	60.00	QP
10	10.661	18.53	9.86	28.39	-21.61	50.00	Average
11	22.652	24.87	9.92	34.79	-25.21	60.00	QP
12	22.652	18.55	9.92	28.47	-21.53	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX1500 Gigabit Wi-Fi 6 Router	Date of Test	2023-04-19
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.4°C /51%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

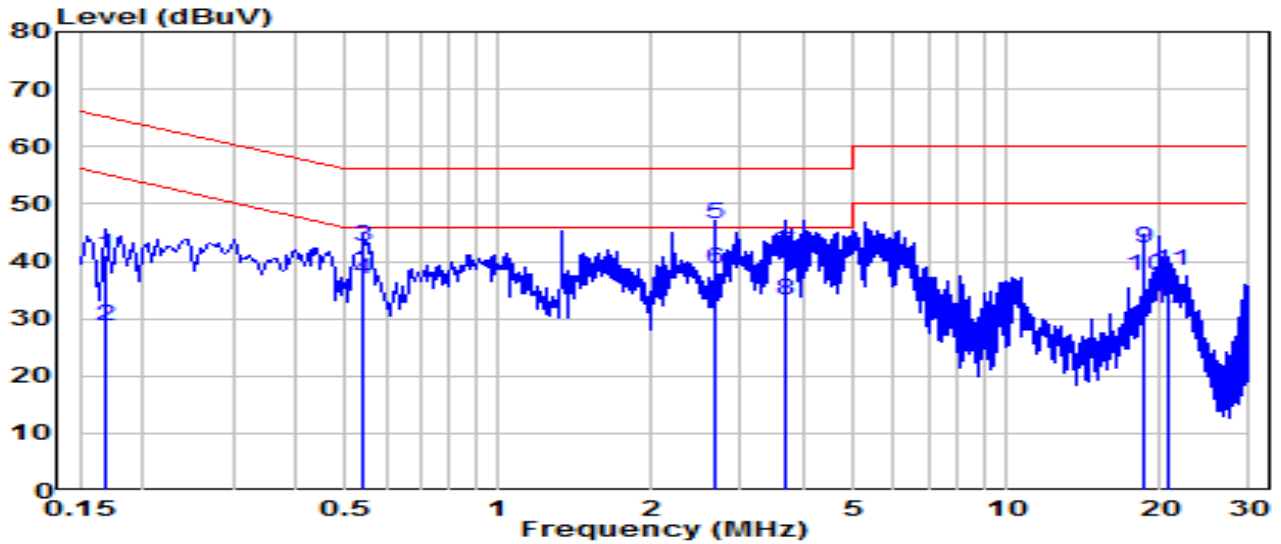

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.168	31.46	9.62	41.08	-23.98	65.06	QP
2	0.168	18.96	9.62	28.58	-26.48	55.06	Average
3	0.541	32.80	9.64	42.45	-13.55	56.00	QP
4	0.541	27.31	9.64	36.96	-9.04	46.00	Average
5	* 2.665	36.64	9.70	46.34	-9.66	56.00	QP
6	* 2.665	29.03	9.70	38.73	-7.27	46.00	Average
7	3.673	31.68	9.72	41.40	-14.60	56.00	QP
8	3.673	23.50	9.72	33.22	-12.78	46.00	Average
9	18.652	32.23	9.98	42.21	-17.79	60.00	QP
10	18.652	27.45	9.98	37.43	-12.57	50.00	Average
11	20.929	28.25	10.00	38.25	-21.75	60.00	QP
12	20.929	21.74	10.00	31.75	-18.25	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2304TW0101-UT” file.

Appendix B : EUT Photograph

Refer to “2304TW0101-UE” file.

Appendix C : Internal Photograph

Refer to “2304TW0101-UI” file.

————— The End —————