


EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

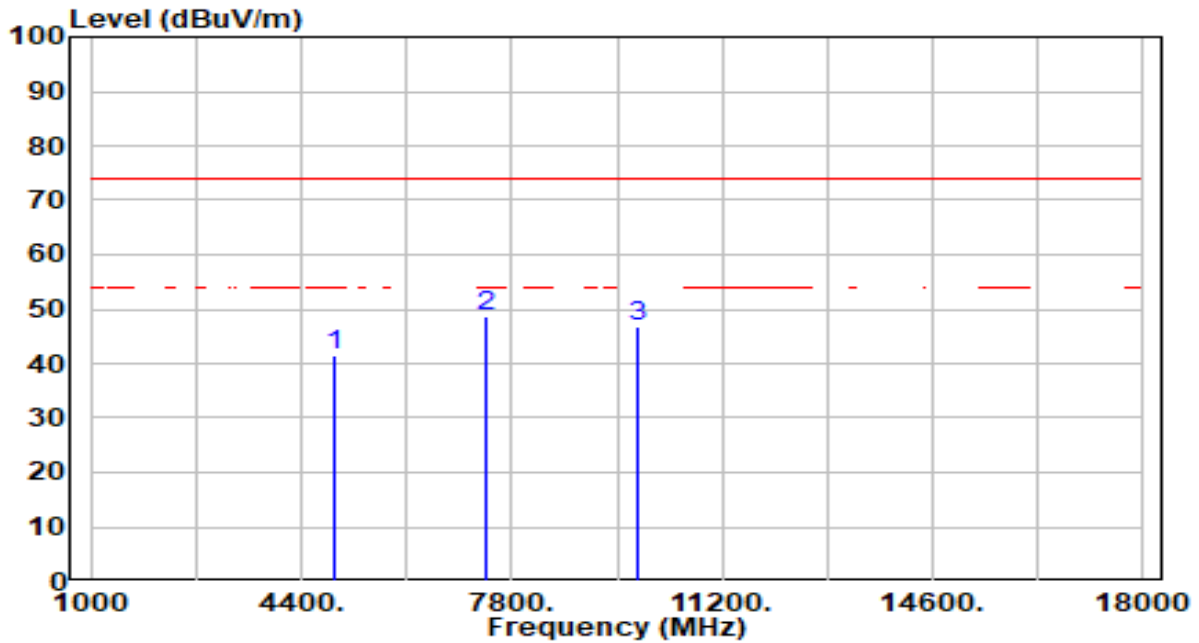


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.53	-1.03	41.51	-32.49	74.00	200	181	Peak
2	* 7386.000	44.45	4.11	48.56	-25.44	74.00	200	149	Peak
3	9848.000	43.51	3.39	46.90	-27.10	74.00	200	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

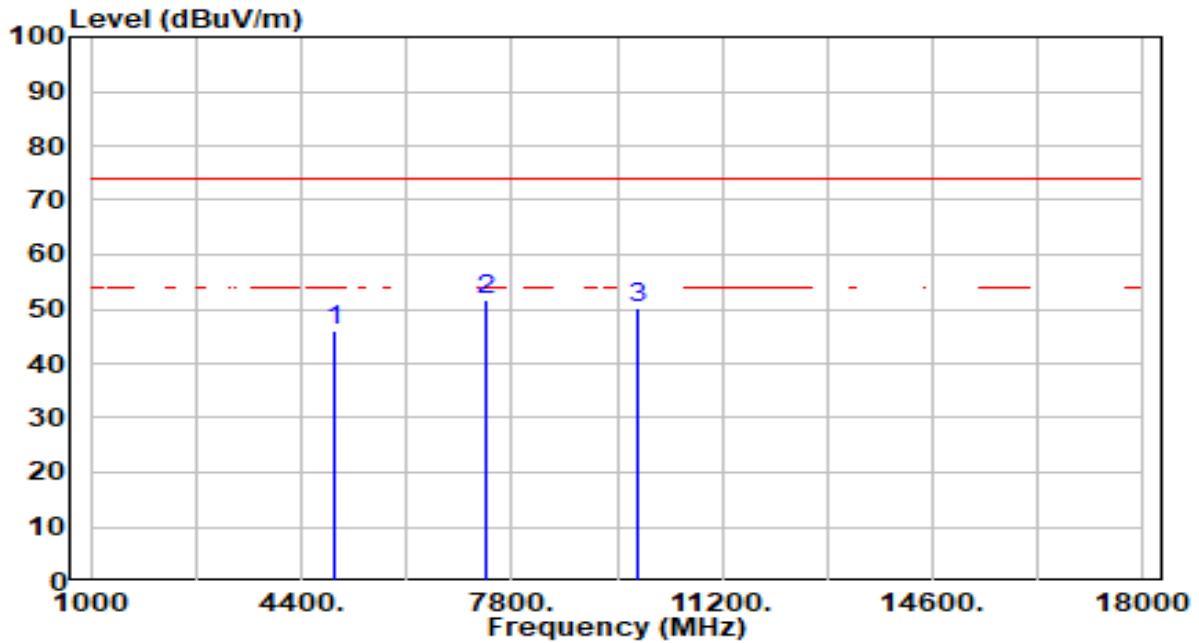


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	46.98	-1.03	45.95	-28.05	74.00	300	258	Peak
2	* 7386.000	47.53	4.11	51.65	-22.35	74.00	300	59	Peak
3	9848.000	46.94	3.39	50.32	-23.68	74.00	300	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

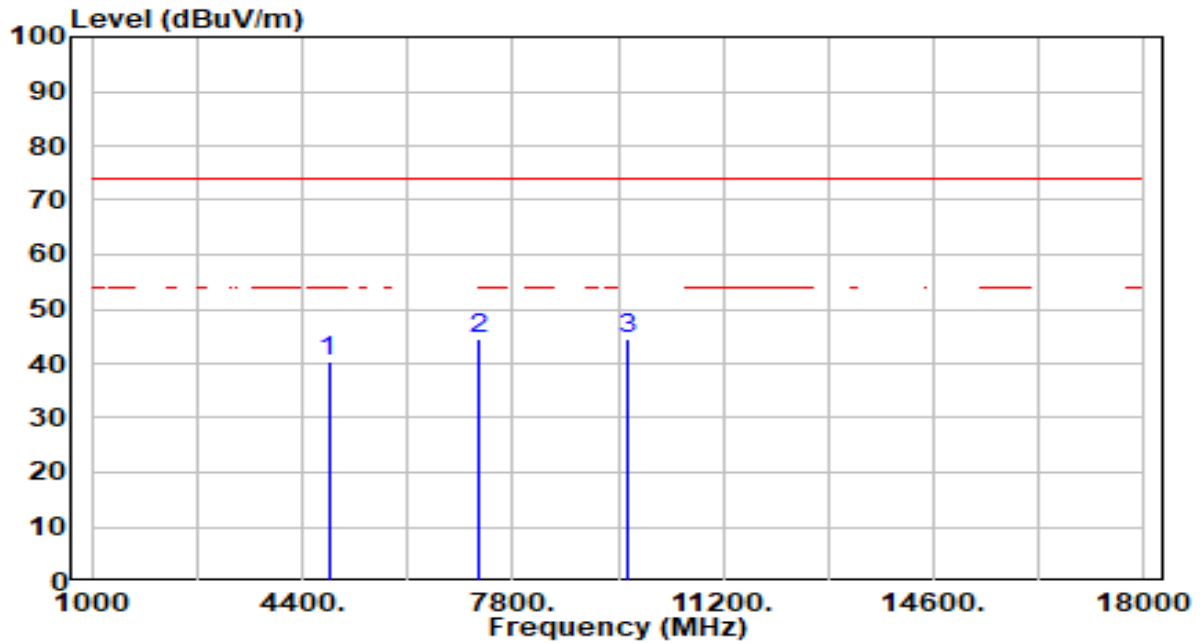


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.56	-1.23	40.33	-33.67	74.00	200	115	Peak
2	7236.000	40.26	4.16	44.42	-29.58	74.00	200	162	Peak
3	* 9648.000	41.40	3.29	44.69	-29.31	74.00	200	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

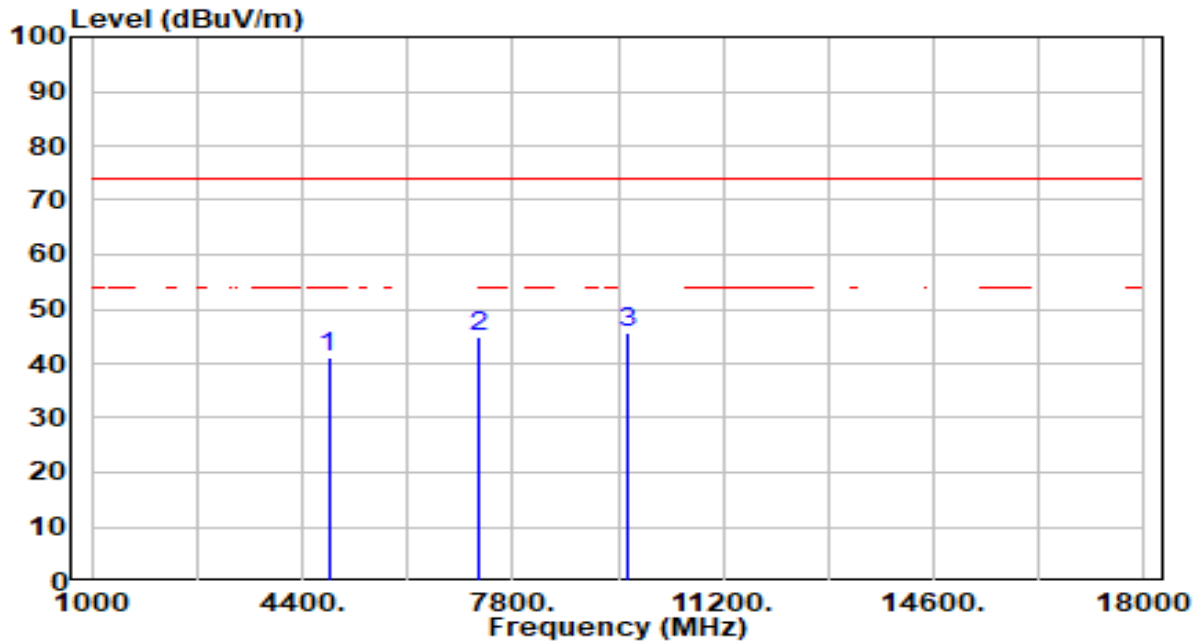


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.45	-1.23	41.23	-32.77	74.00	300	227	Peak
2	7236.000	40.57	4.16	44.73	-29.27	74.00	300	56	Peak
3	* 9648.000	42.27	3.29	45.56	-28.44	74.00	300	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

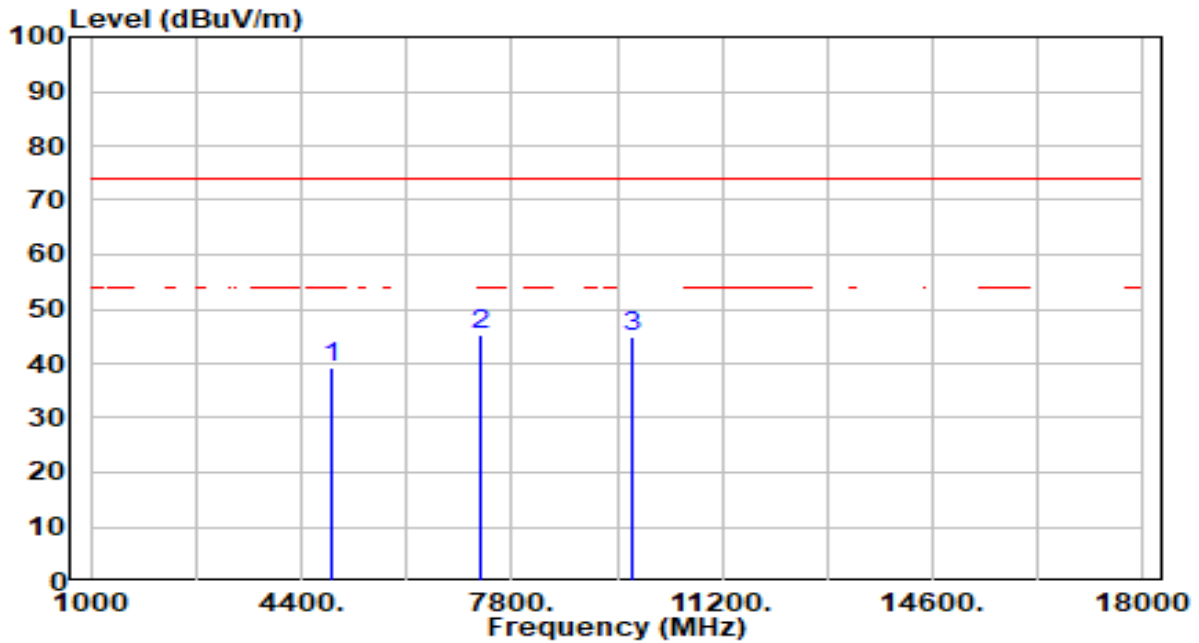


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.51	-1.13	39.39	-34.61	74.00	200	101	Peak
2	* 7311.000	41.26	4.14	45.39	-28.61	74.00	200	178	Peak
3	9748.000	41.49	3.33	44.81	-29.19	74.00	200	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

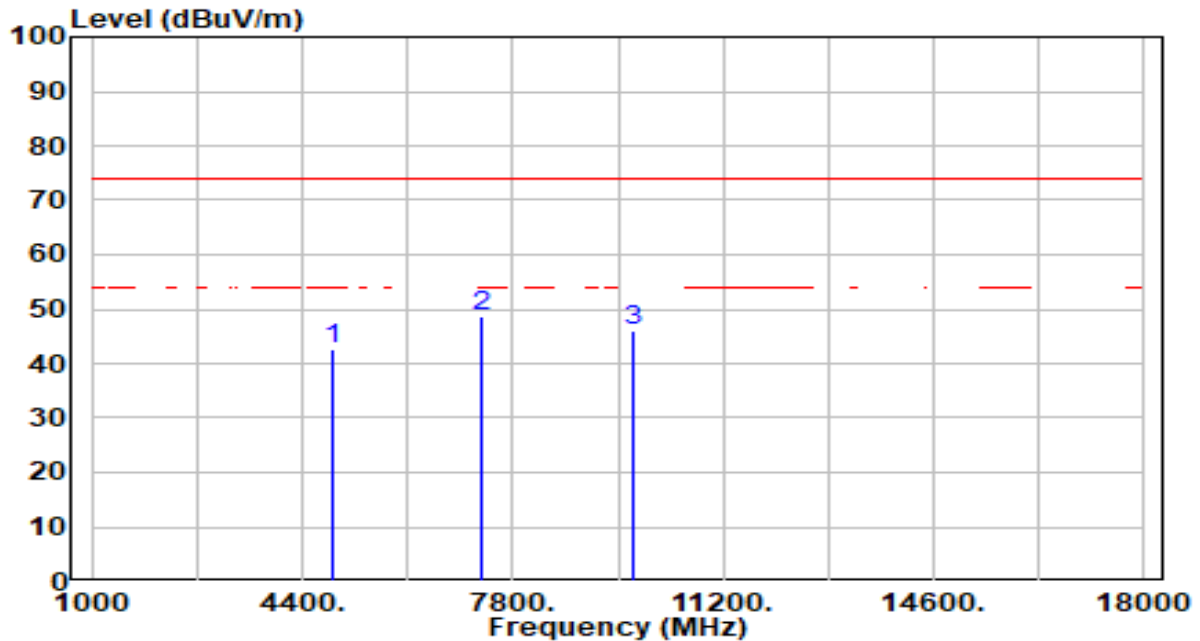


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.73	-1.13	42.61	-31.39	74.00	300	227	Peak
2	* 7311.000	44.43	4.14	48.57	-25.43	74.00	300	141	Peak
3	9748.000	42.72	3.33	46.05	-27.95	74.00	300	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

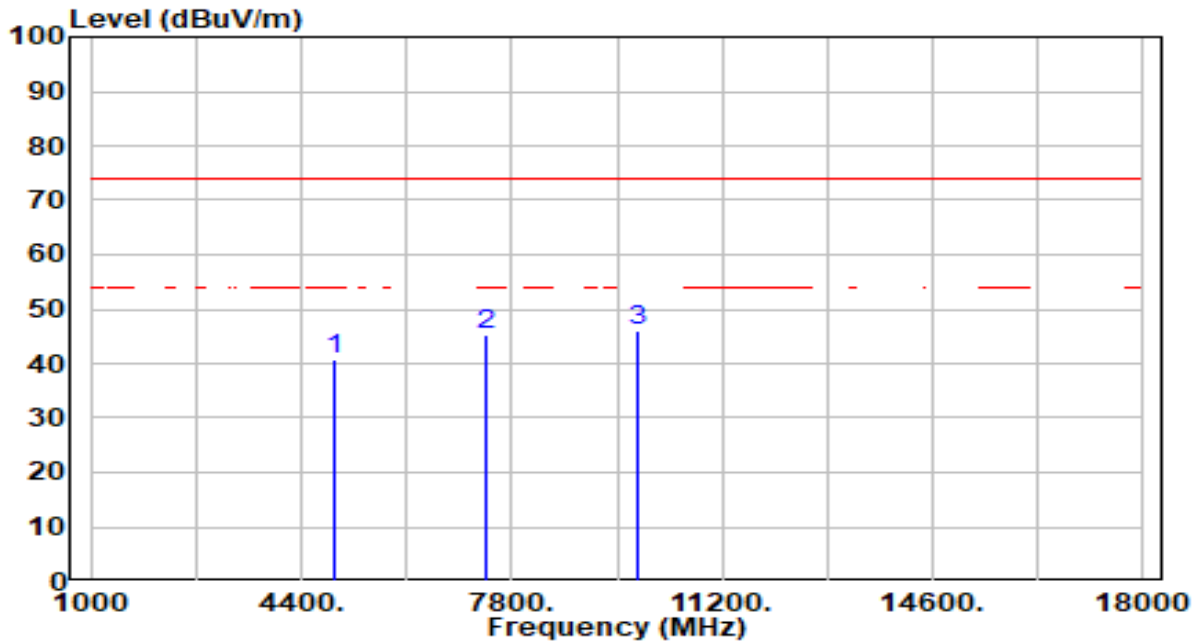


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.63	-1.03	40.60	-33.40	74.00	200	267	Peak
2	7386.000	41.11	4.11	45.22	-28.78	74.00	200	281	Peak
3	* 9848.000	42.65	3.39	46.04	-27.96	74.00	200	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

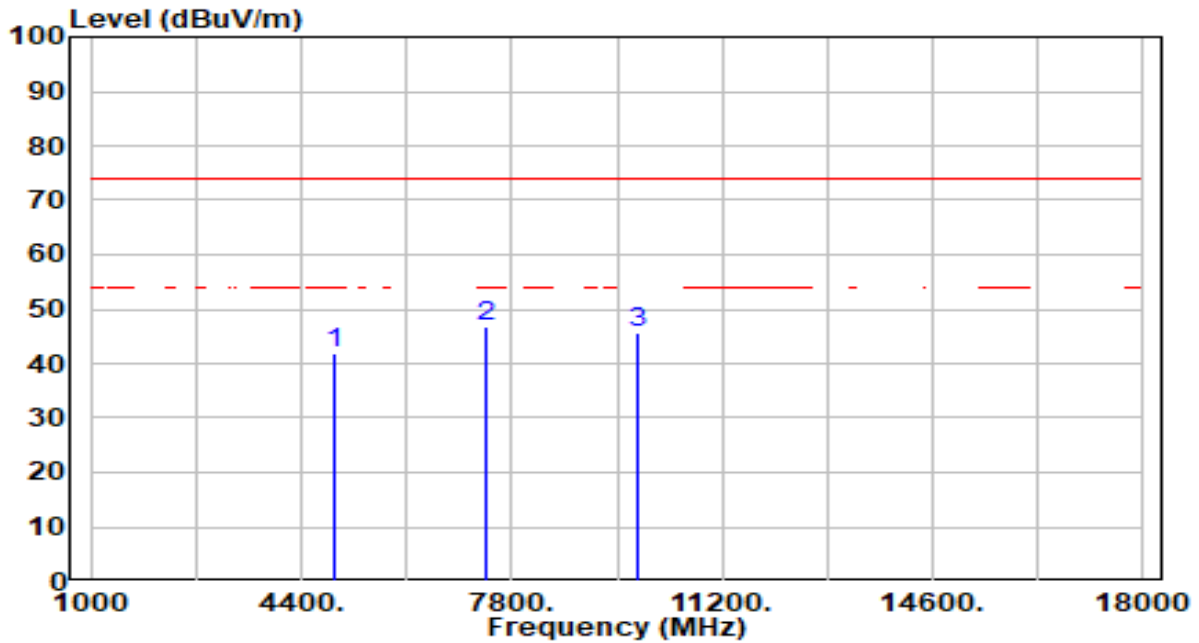


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	43.00	-1.03	41.97	-32.03	74.00	300	222	Peak
2	* 7386.000	42.86	4.11	46.98	-27.02	74.00	300	58	Peak
3	9848.000	42.31	3.39	45.69	-28.31	74.00	300	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

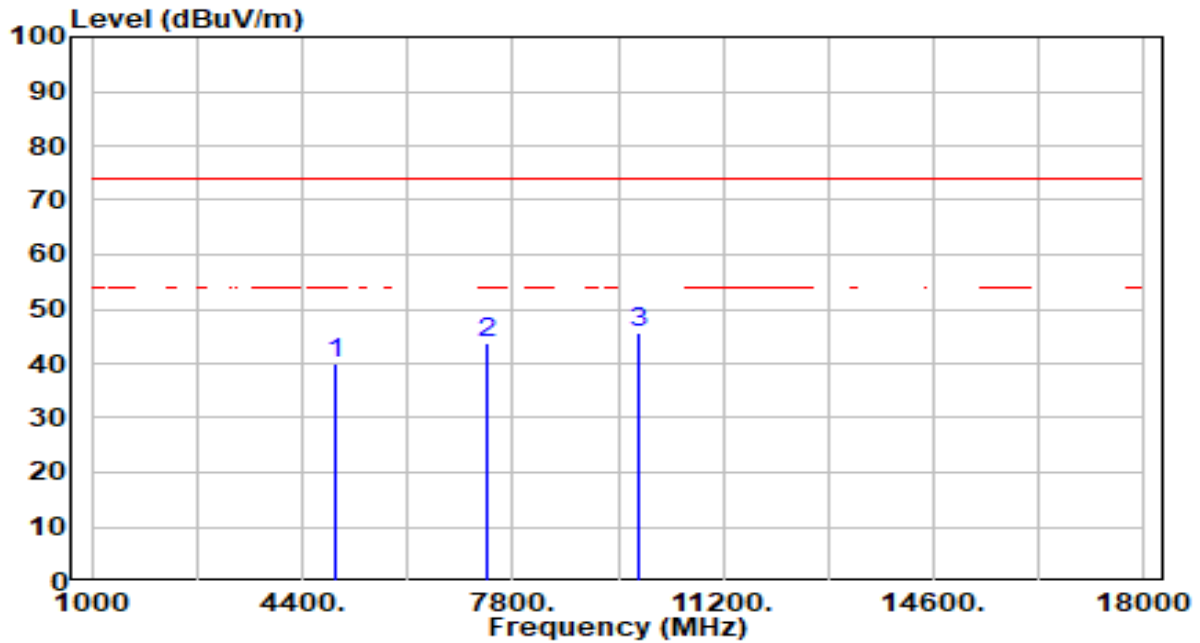


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.98	-1.03	39.95	-34.05	74.00	200	290	Peak
2	7386.000	39.71	4.11	43.83	-30.17	74.00	200	284	Peak
3	* 9848.000	42.30	3.39	45.69	-28.31	74.00	200	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

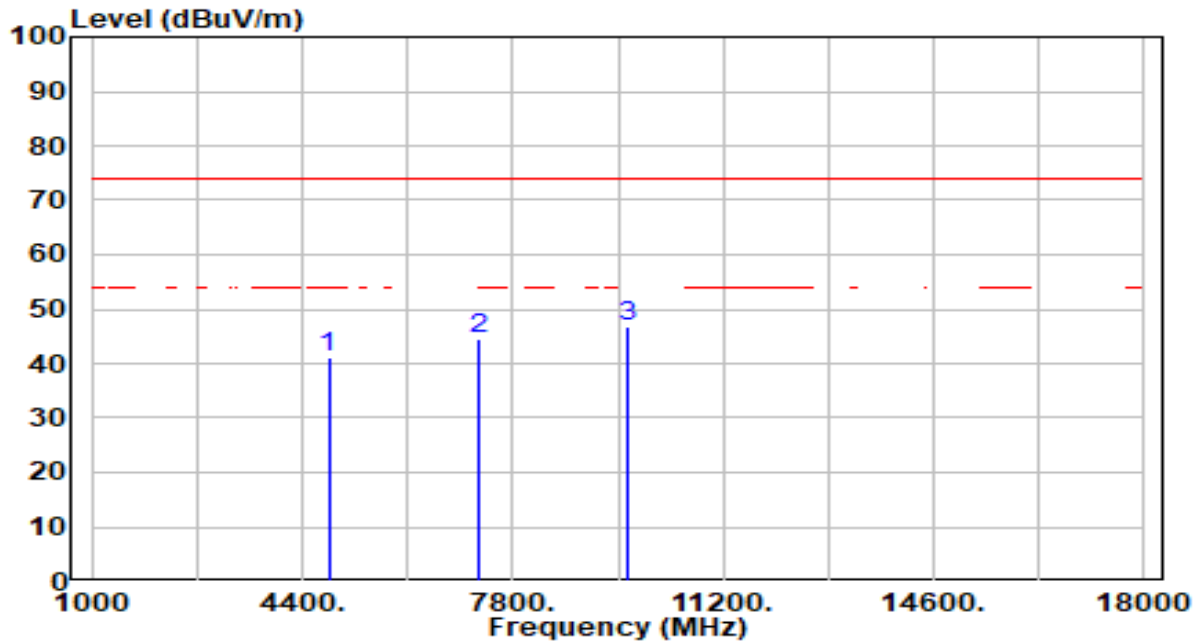


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.54	-1.23	41.32	-32.68	74.00	300	221	Peak
2	7236.000	40.50	4.16	44.66	-29.34	74.00	300	259	Peak
3	* 9648.000	43.42	3.29	46.71	-27.29	74.00	300	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

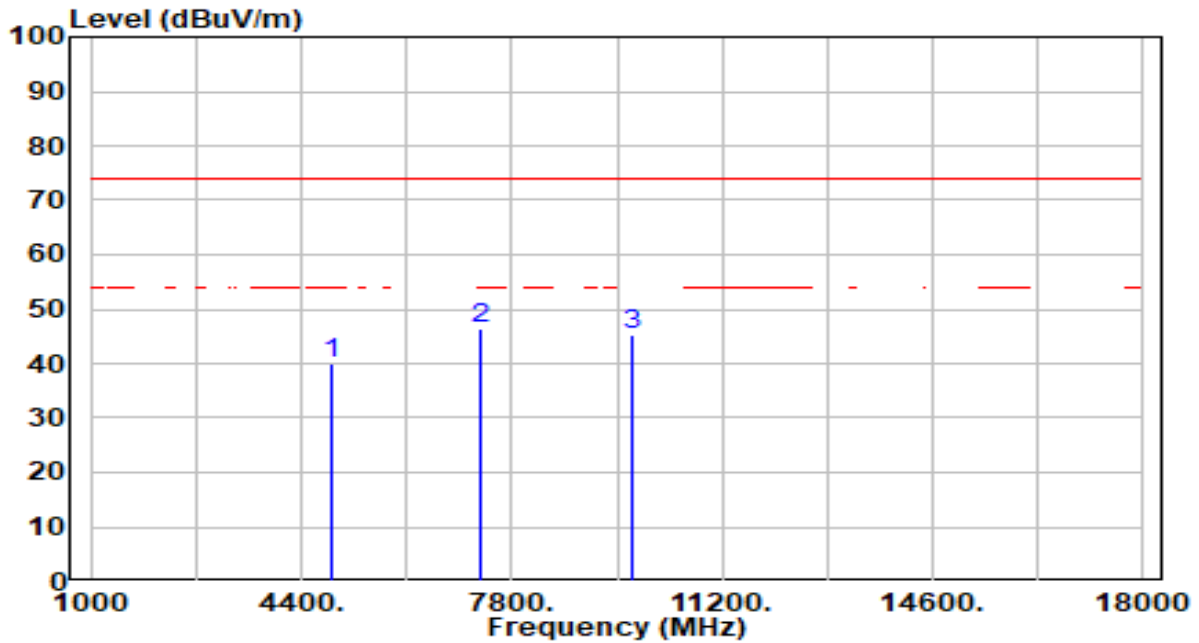


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.17	-1.13	40.04	-33.96	74.00	200	151	Peak
2	* 7311.000	42.45	4.14	46.59	-27.41	74.00	200	174	Peak
3	9748.000	41.98	3.33	45.30	-28.70	74.00	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

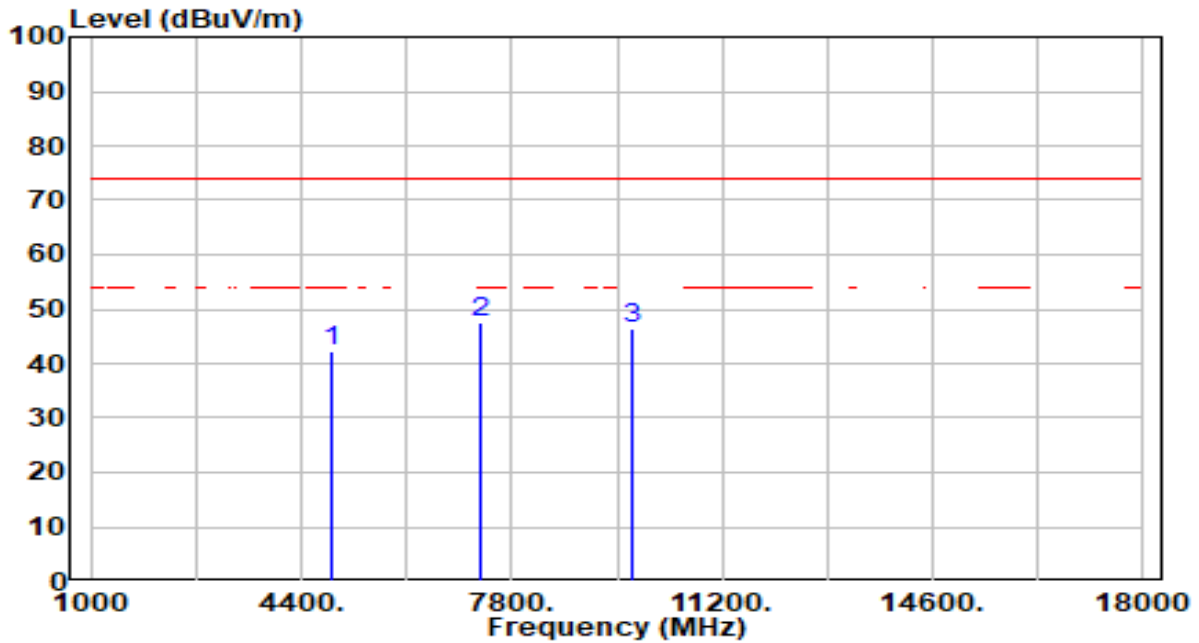


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.27	-1.13	42.15	-31.85	74.00	300	219	Peak
2	* 7311.000	43.51	4.14	47.64	-26.36	74.00	300	259	Peak
3	9748.000	43.22	3.33	46.55	-27.45	74.00	300	149	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

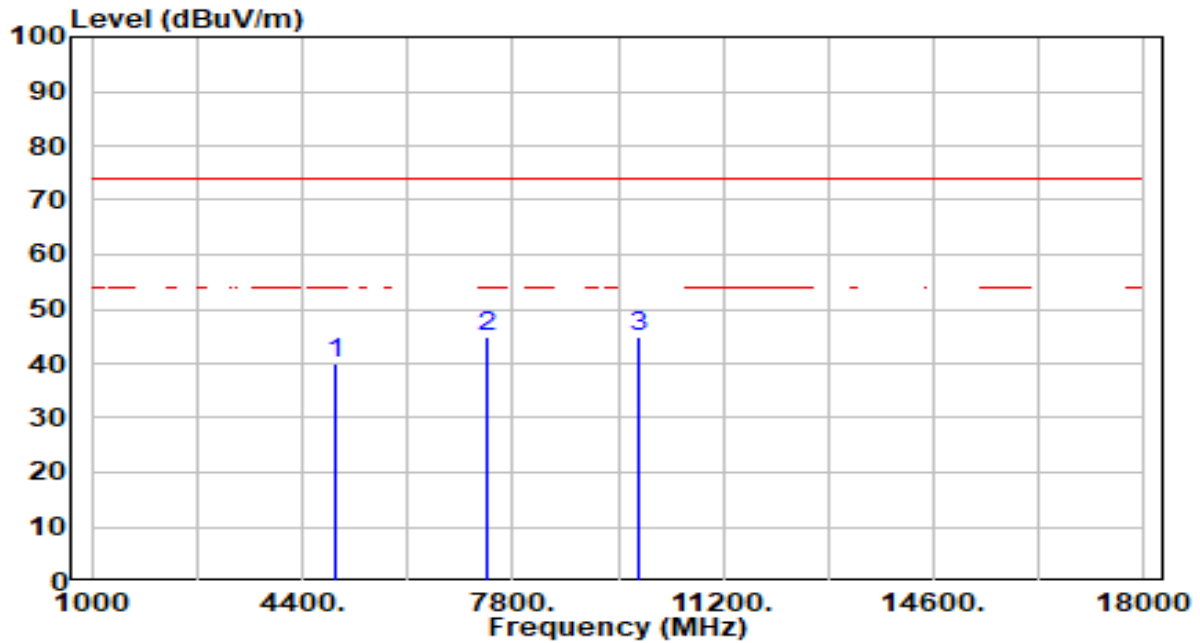


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.96	-1.03	39.94	-34.06	74.00	200	112	Peak
2	* 7386.000	40.73	4.11	44.84	-29.16	74.00	200	43	Peak
3	9848.000	41.39	3.39	44.77	-29.23	74.00	200	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

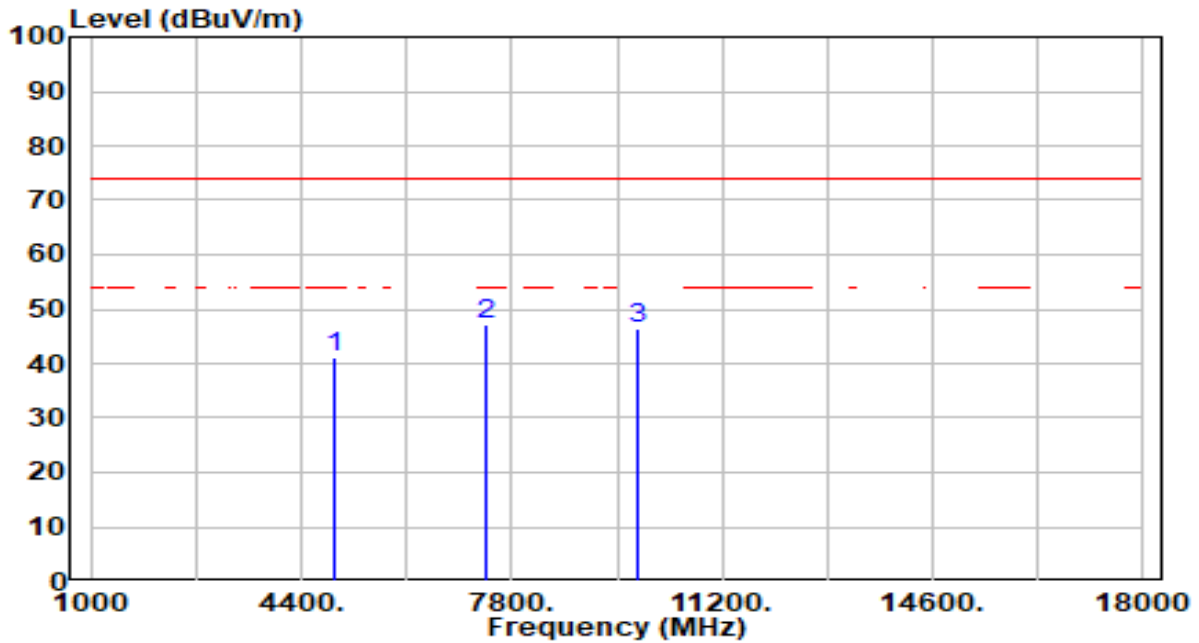


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.24	-1.03	41.22	-32.78	74.00	300	219	Peak
2	* 7386.000	42.89	4.11	47.00	-27.00	74.00	300	57	Peak
3	9848.000	42.90	3.39	46.29	-27.71	74.00	300	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

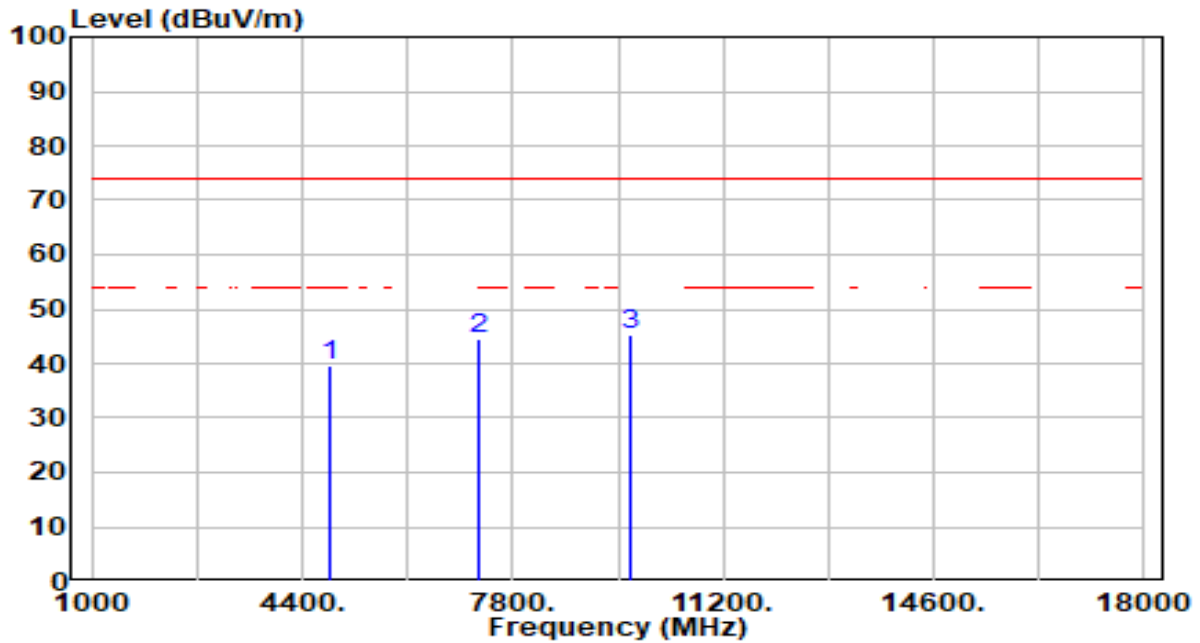


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.76	-1.19	39.57	-34.43	74.00	200	271	Peak
2	7266.000	40.50	4.15	44.65	-29.35	74.00	200	300	Peak
3	* 9688.000	42.07	3.30	45.37	-28.63	74.00	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

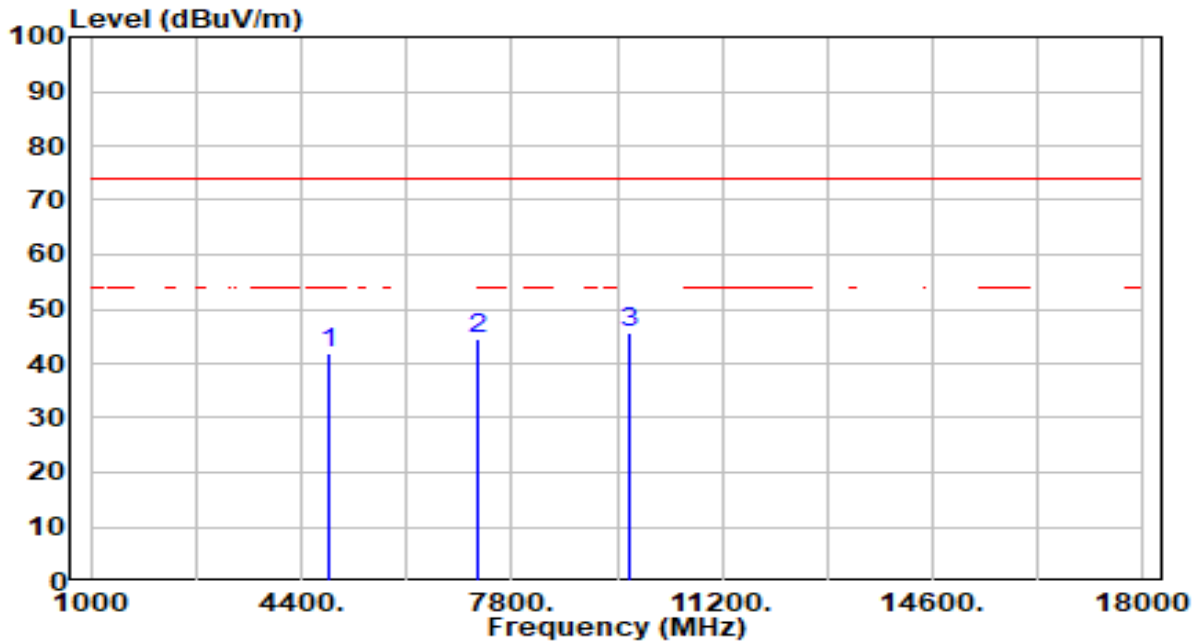


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	43.01	-1.19	41.82	-32.18	74.00	300	149	Peak
2	7266.000	40.56	4.15	44.71	-29.29	74.00	300	325	Peak
3	* 9688.000	42.36	3.30	45.66	-28.34	74.00	300	39	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

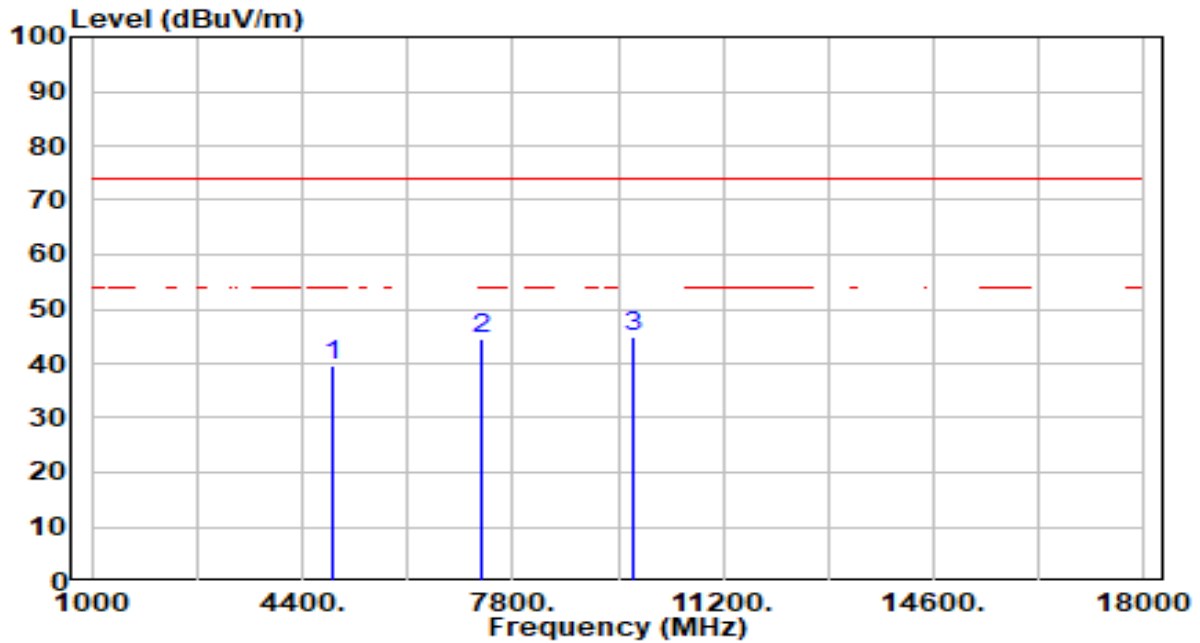


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.77	-1.13	39.64	-34.36	74.00	200	0	Peak
2	7311.000	40.47	4.14	44.61	-29.39	74.00	200	166	Peak
3	* 9748.000	41.69	3.33	45.01	-28.99	74.00	200	57	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

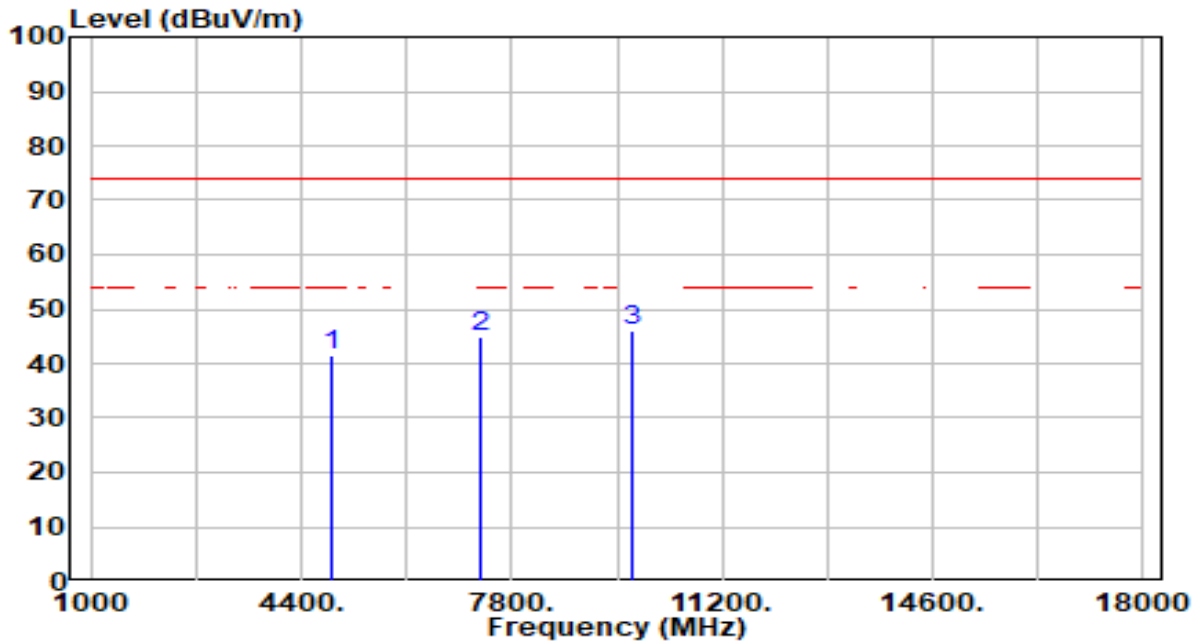


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.63	-1.13	41.50	-32.50	74.00	300	231	Peak
2	7311.000	40.78	4.14	44.92	-29.08	74.00	300	54	Peak
3	* 9748.000	42.59	3.33	45.92	-28.08	74.00	300	303	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

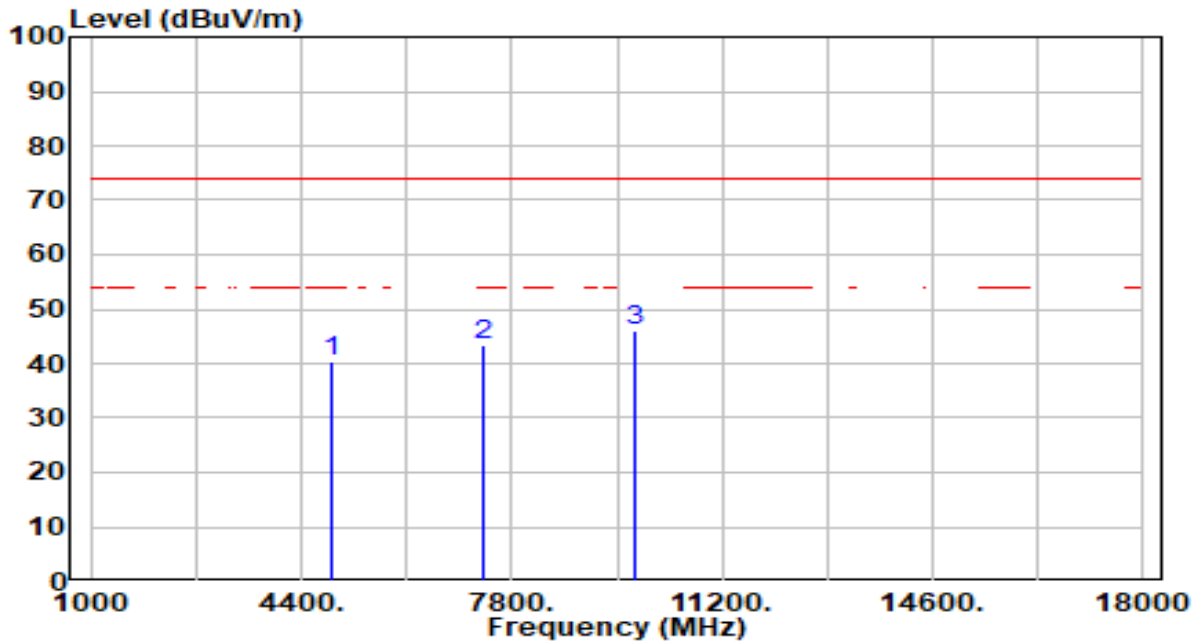


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.32	-1.07	40.25	-33.75	74.00	200	130	Peak
2	7356.000	39.42	4.12	43.54	-30.46	74.00	200	250	Peak
3	* 9808.000	42.82	3.35	46.17	-27.83	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

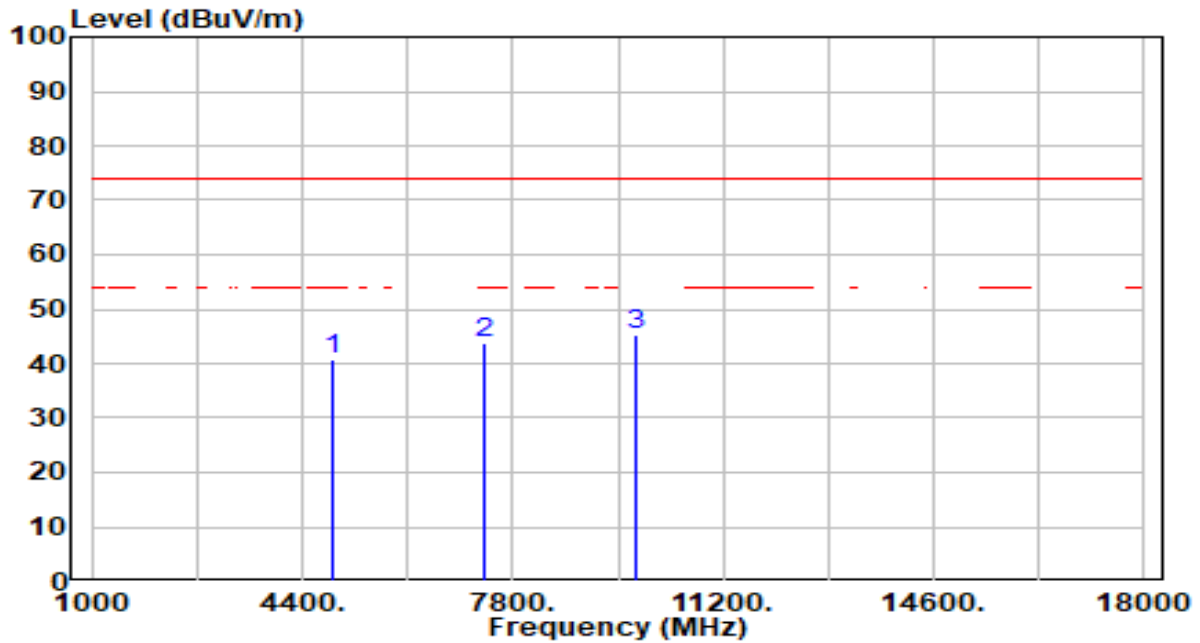


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.77	-1.07	40.70	-33.30	74.00	300	144	Peak
2	7356.000	39.67	4.12	43.79	-30.21	74.00	300	135	Peak
3	* 9808.000	41.98	3.35	45.33	-28.67	74.00	300	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

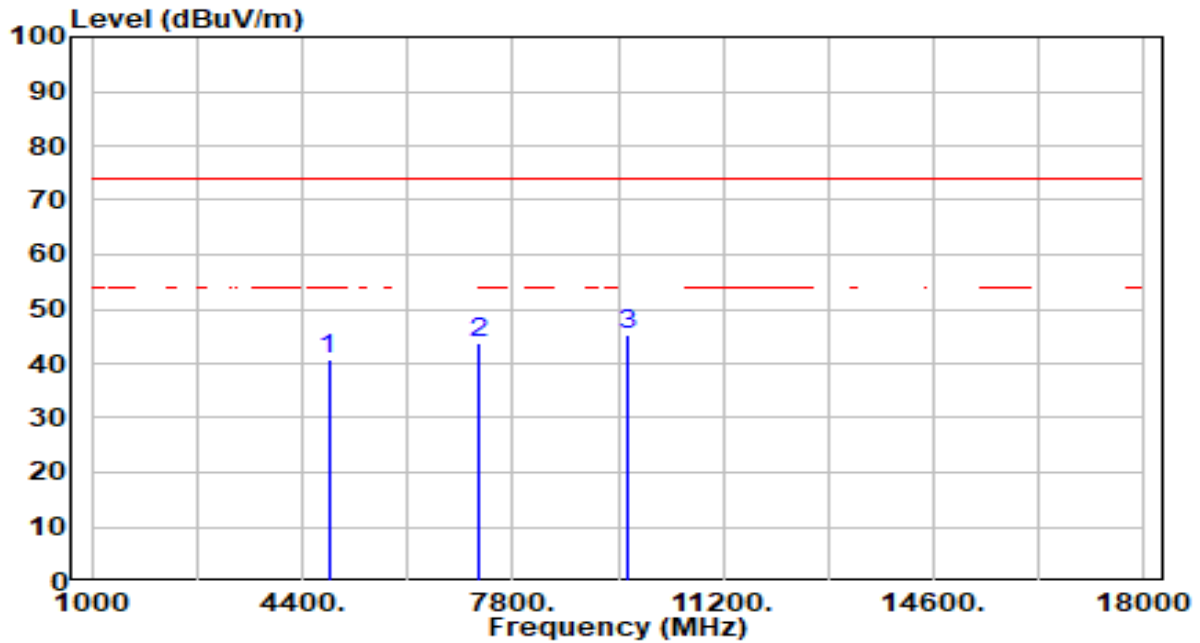


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.14	-1.23	40.91	-33.09	74.00	200	333	Peak
2	7236.000	39.63	4.16	43.79	-30.21	74.00	200	119	Peak
3	* 9648.000	41.94	3.29	45.23	-28.77	74.00	200	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

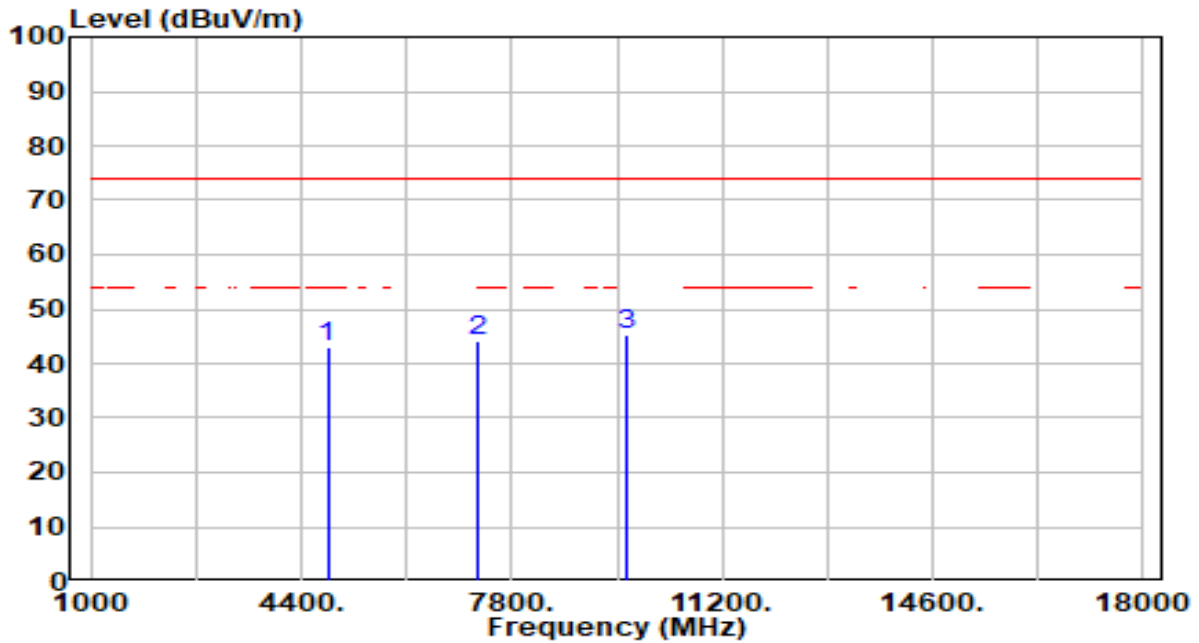


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	44.35	-1.23	43.12	-30.88	74.00	300	230	Peak
2	7236.000	40.07	4.16	44.23	-29.77	74.00	300	360	Peak
3	* 9648.000	42.16	3.29	45.45	-28.55	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

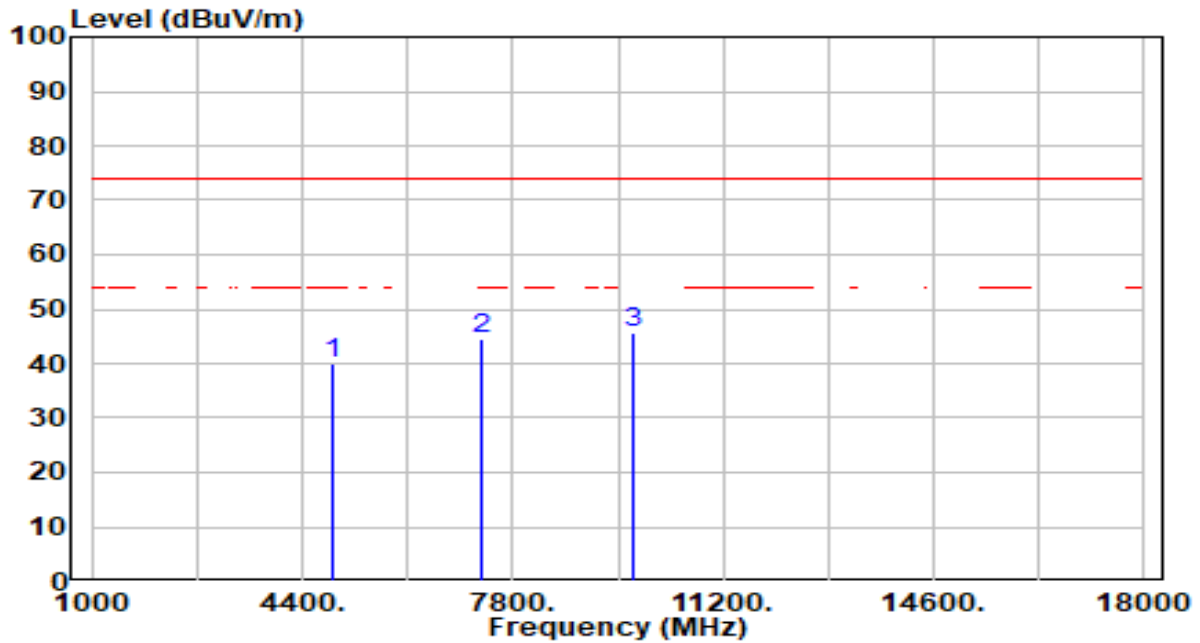


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.14	-1.13	40.01	-33.99	74.00	200	136	Peak
2	7311.000	40.38	4.14	44.52	-29.48	74.00	200	180	Peak
3	* 9748.000	42.15	3.33	45.48	-28.52	74.00	200	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

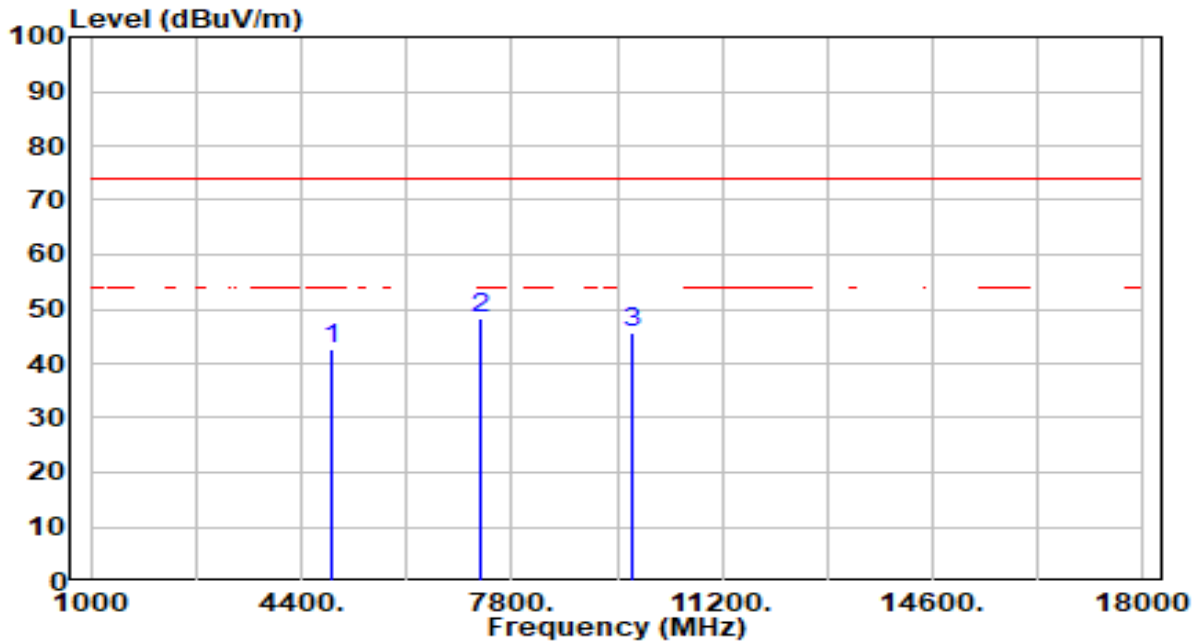


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.87	-1.13	42.74	-31.26	74.00	300	224	Peak
2	* 7311.000	44.09	4.14	48.23	-25.77	74.00	300	137	Peak
3	9748.000	42.44	3.33	45.76	-28.24	74.00	300	64	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

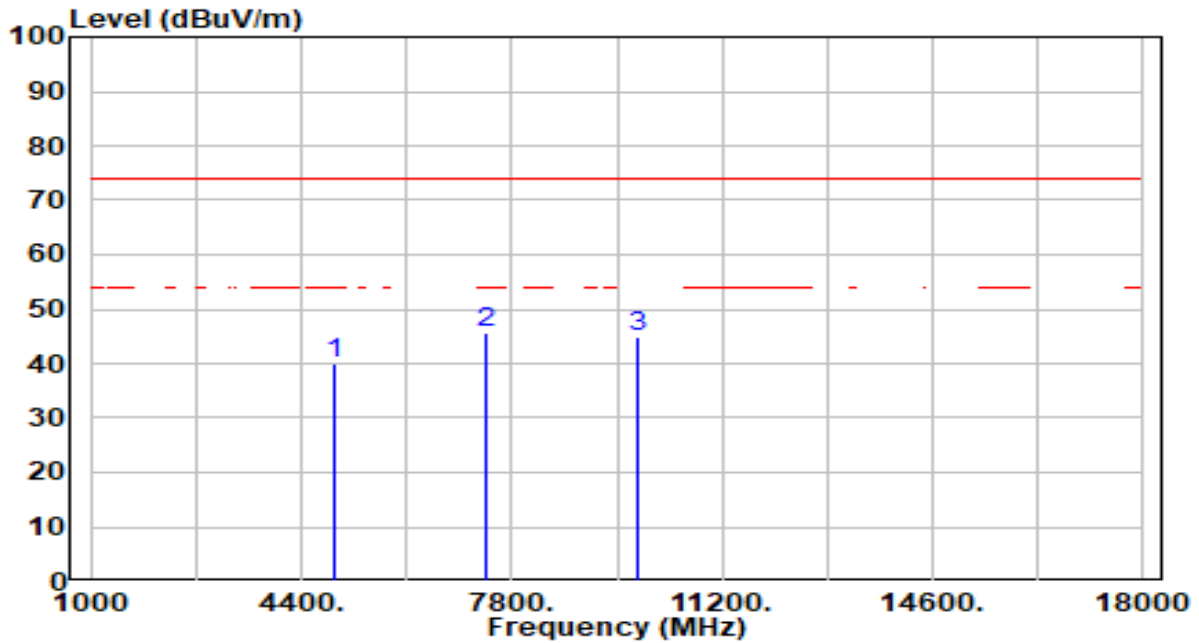


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.02	-1.03	40.00	-34.00	74.00	200	0	Peak
2	* 7386.000	41.52	4.11	45.63	-28.37	74.00	200	0	Peak
3	9848.000	41.69	3.39	45.08	-28.92	74.00	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

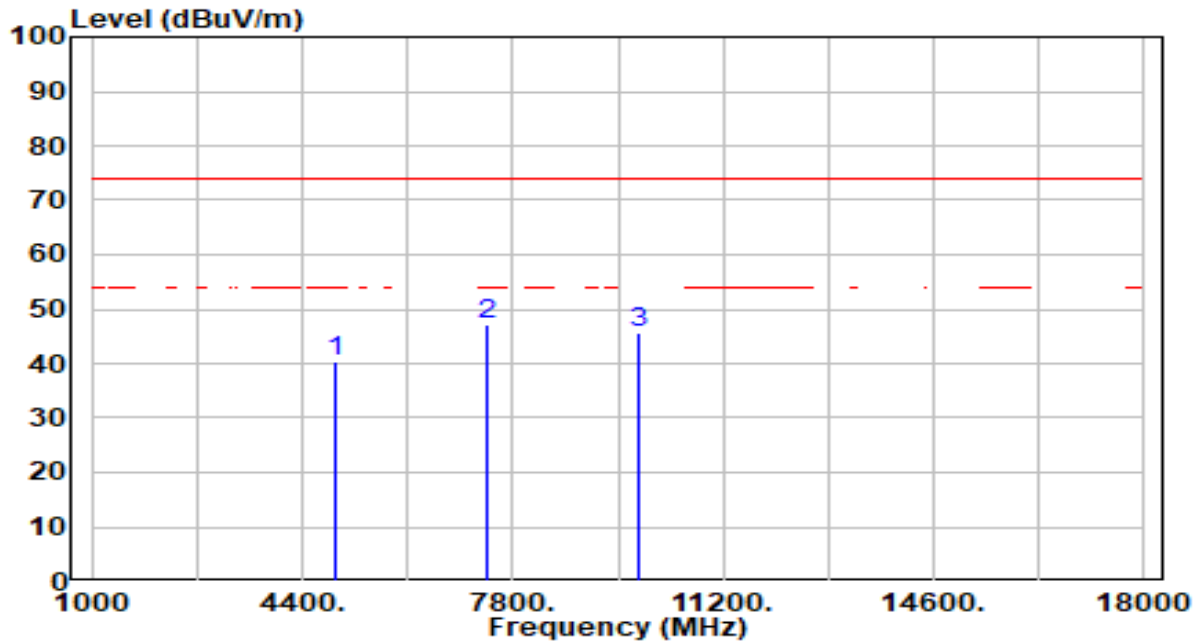


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.32	-1.03	40.30	-33.70	74.00	300	230	Peak
2	* 7386.000	42.93	4.11	47.05	-26.95	74.00	300	98	Peak
3	9848.000	42.37	3.39	45.76	-28.24	74.00	300	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

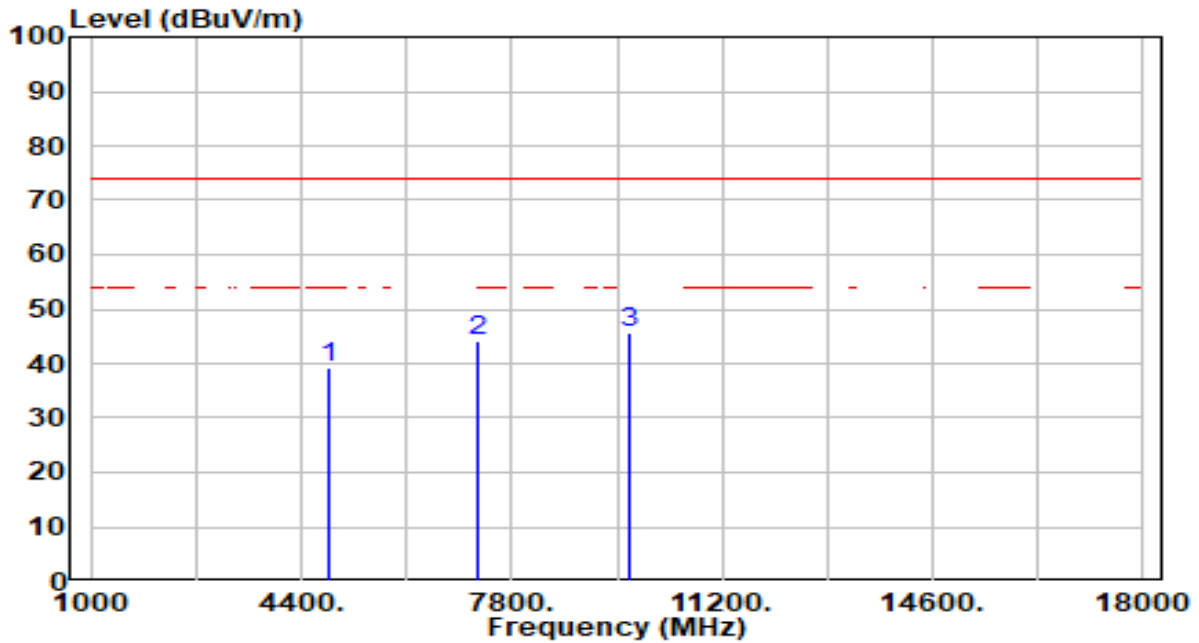


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.53	-1.19	39.35	-34.65	74.00	200	0	Peak
2	7266.000	40.12	4.15	44.27	-29.73	74.00	200	307	Peak
3	* 9688.000	42.52	3.30	45.82	-28.18	74.00	200	321	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

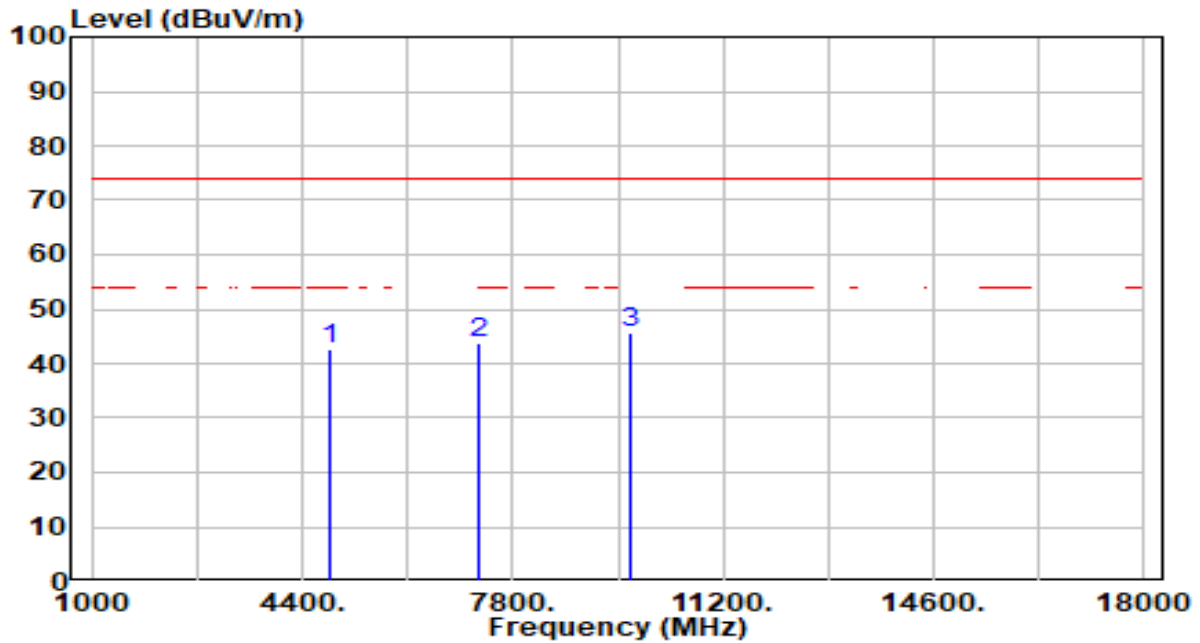


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	43.65	-1.19	42.46	-31.54	74.00	300	149	Peak
2	7266.000	39.67	4.15	43.82	-30.18	74.00	300	126	Peak
3	* 9688.000	42.51	3.30	45.82	-28.18	74.00	300	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

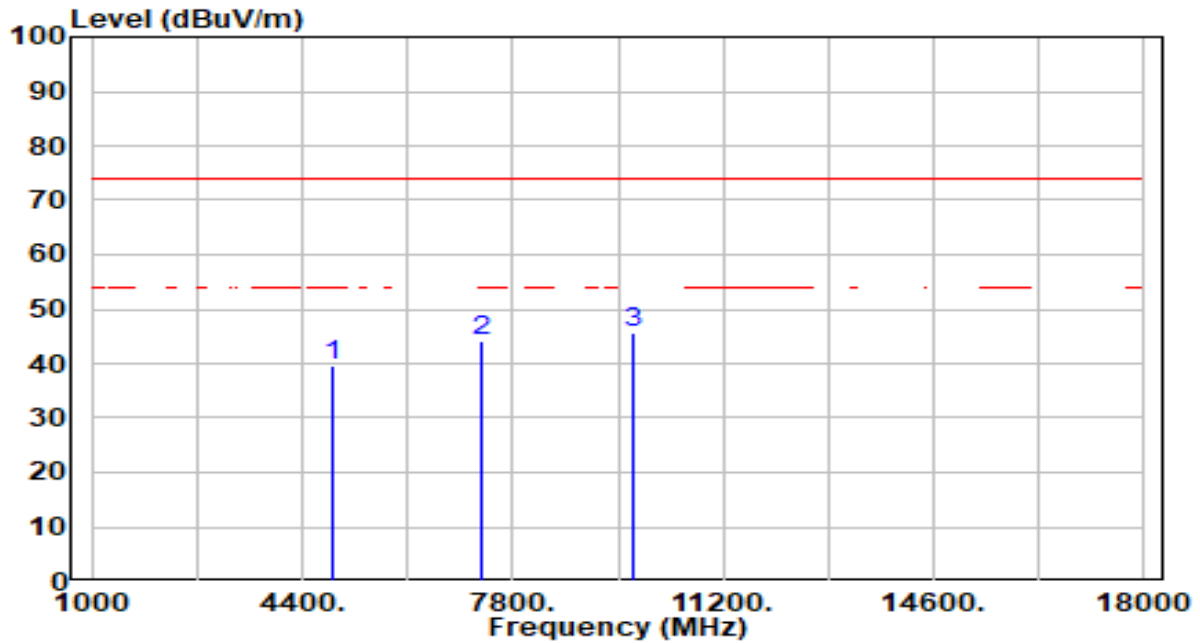


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.75	-1.13	39.62	-34.38	74.00	200	255	Peak
2	7311.000	40.06	4.14	44.20	-29.80	74.00	200	342	Peak
3	* 9748.000	42.42	3.33	45.74	-28.26	74.00	200	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

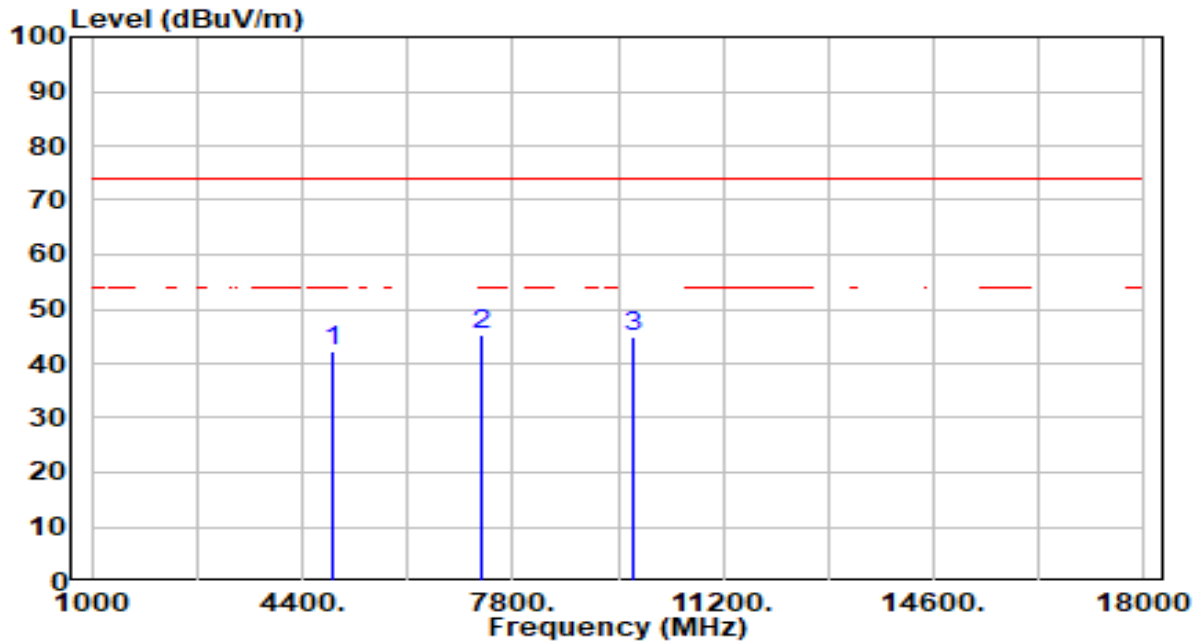


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.50	-1.13	42.37	-31.63	74.00	300	156	Peak
2	* 7311.000	41.26	4.14	45.40	-28.60	74.00	300	256	Peak
3	9748.000	41.46	3.33	44.79	-29.21	74.00	300	308	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

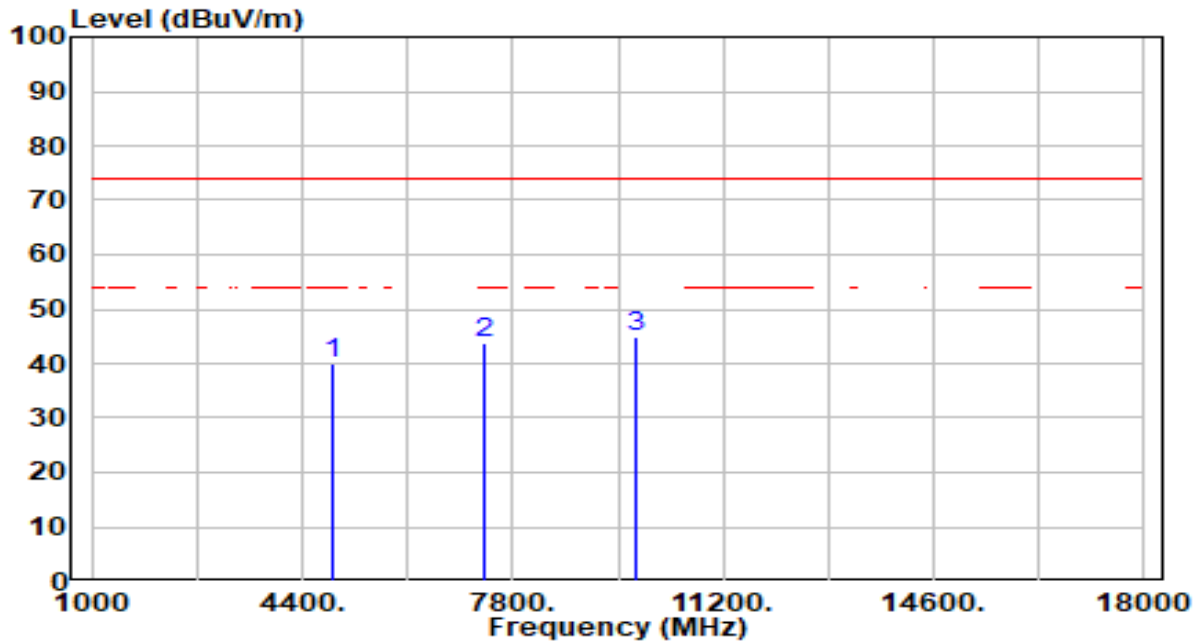


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.08	-1.07	40.01	-33.99	74.00	200	0	Peak
2	7356.000	39.79	4.12	43.92	-30.08	74.00	200	306	Peak
3	* 9808.000	41.47	3.35	44.82	-29.18	74.00	200	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

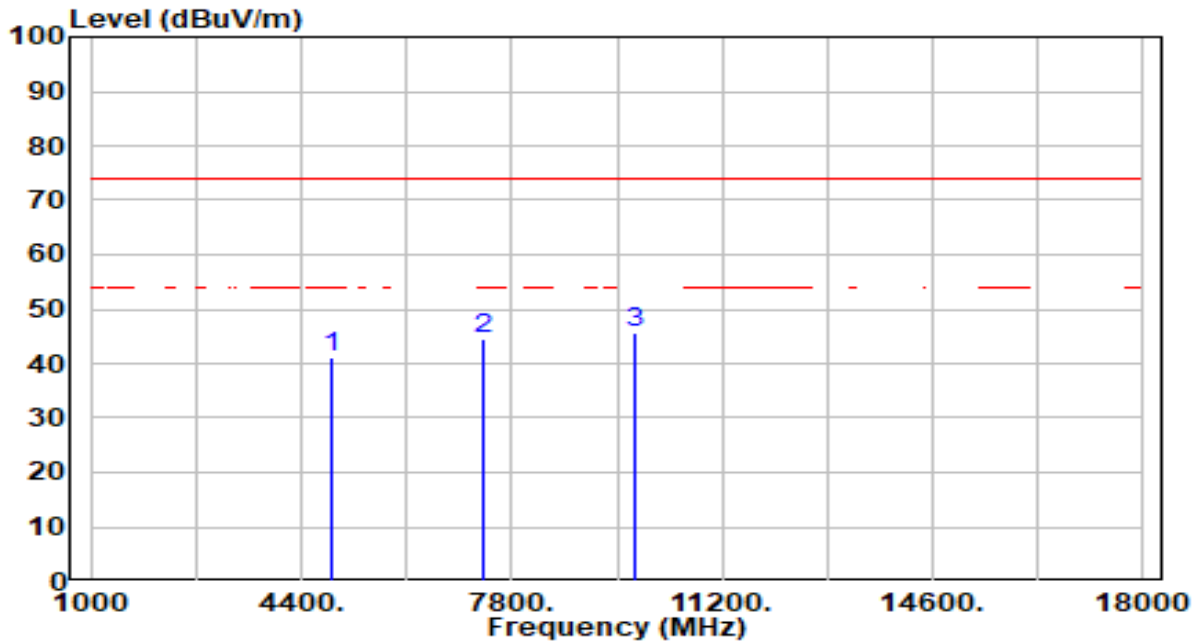

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	42.22	-1.07	41.15	-32.85	74.00	300	225	Peak
2	7356.000	40.30	4.12	44.42	-29.58	74.00	300	48	Peak
3	* 9808.000	42.27	3.35	45.63	-28.37	74.00	300	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

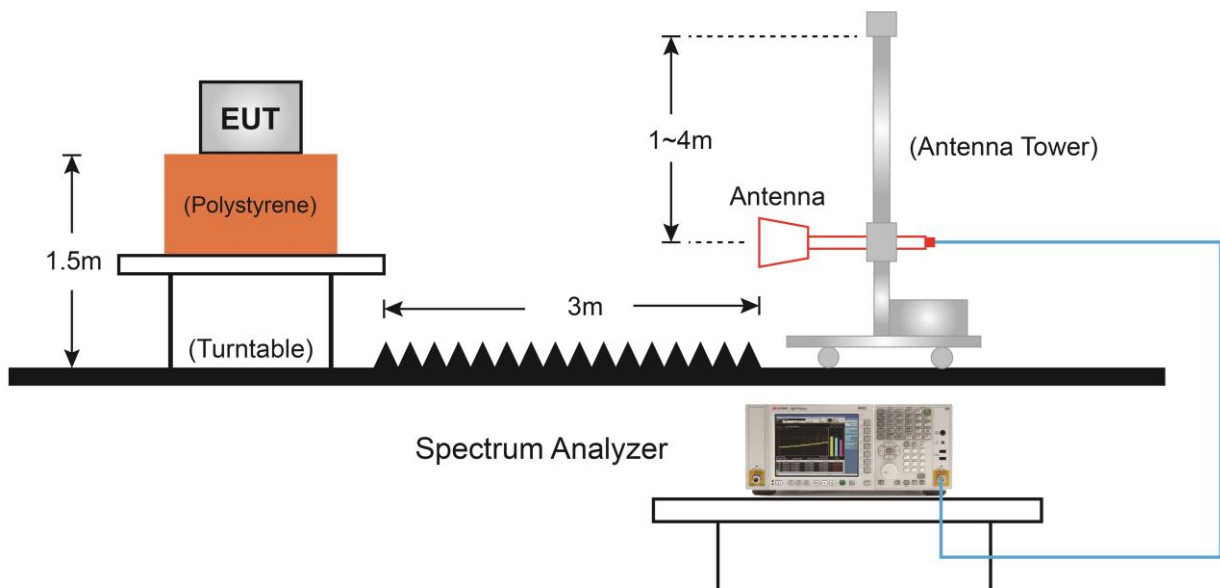

7.7.5. Test Result

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

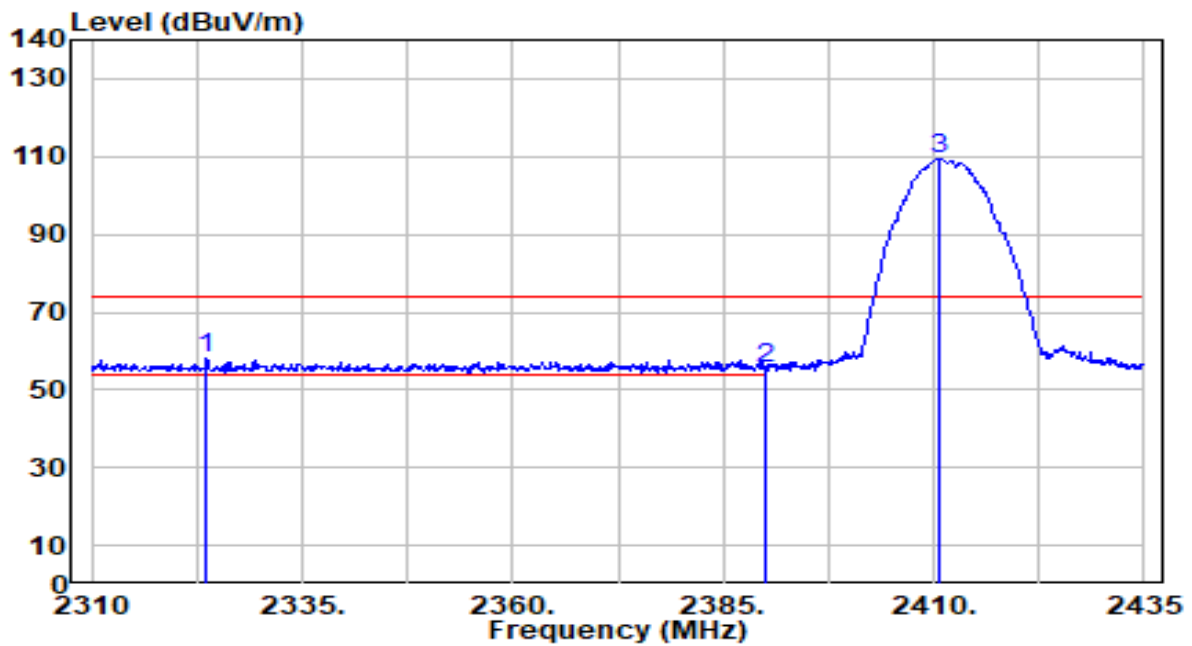


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2323.625	28.05	29.91	57.96	-16.04	74.00	175	152	Peak
2	2390.000	25.50	29.99	55.50	-18.50	74.00	175	152	Peak
3	2410.750	79.46	30.04	109.51	N/A	N/A	175	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

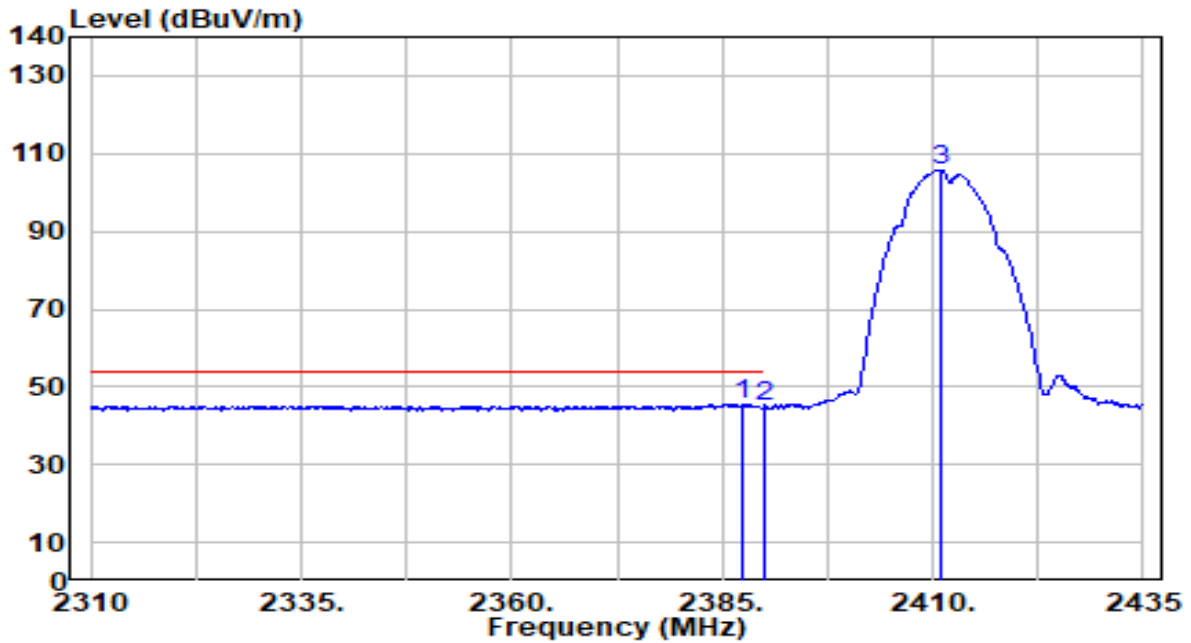


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.500	15.54	29.99	45.54	-8.46	54.00	175	152	Average
2	2390.000	14.81	29.99	44.81	-9.19	54.00	175	152	Average
3	2411.125	75.75	30.04	105.80	N/A	N/A	175	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

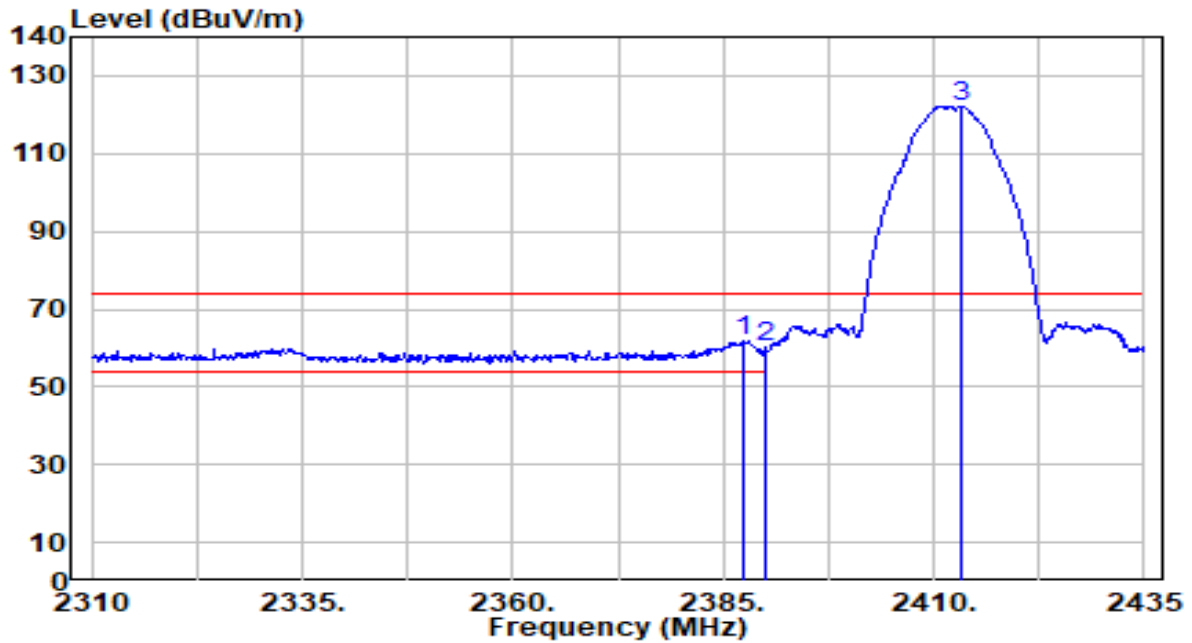


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.500	31.64	29.99	61.63	-12.37	74.00	200	192	Peak
2		2390.000	29.97	29.99	59.96	-14.04	74.00	200	192	Peak
3		2413.250	92.23	30.05	122.29	N/A	N/A	200	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

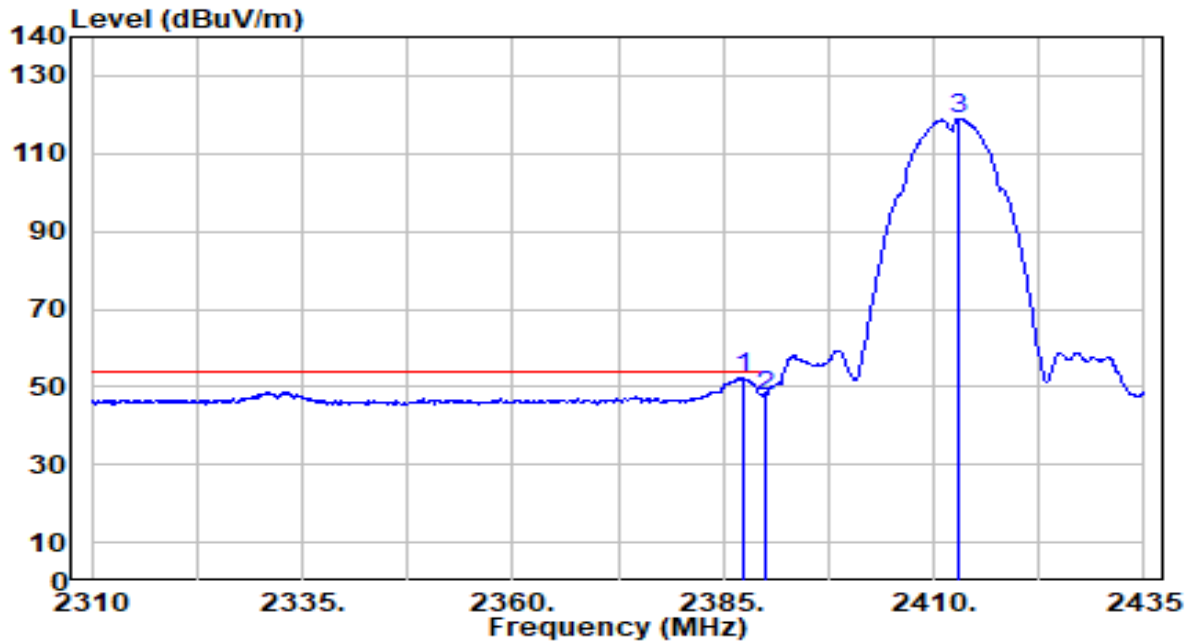


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.375	22.45	29.99	52.44	-1.56	54.00	200	192	Average
2		2390.000	17.75	29.99	47.74	-6.26	54.00	200	192	Average
3		2413.000	89.04	30.05	119.09	N/A	N/A	200	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

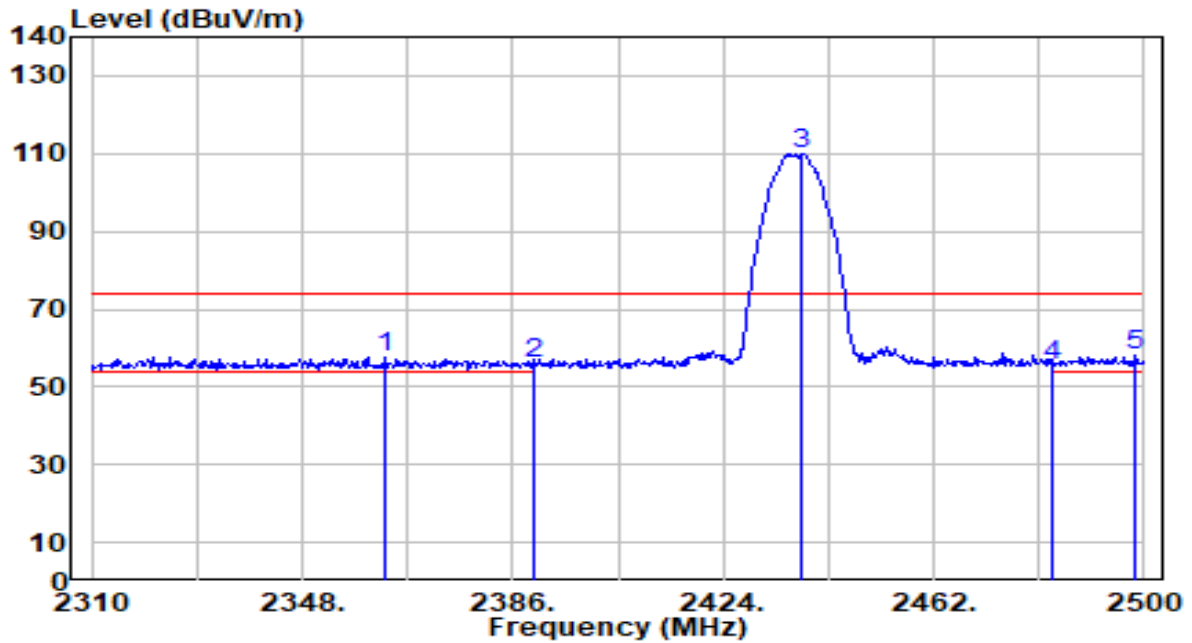


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2363.010	27.69	29.96	57.65	-16.35	74.00	150	188	Peak
2	2390.000	26.15	29.99	56.15	-17.85	74.00	150	188	Peak
3	2438.250	79.97	30.13	110.11	N/A	N/A	150	188	Peak
4	2483.500	25.42	30.29	55.70	-18.30	74.00	150	188	Peak
5	* 2498.480	27.57	30.33	57.90	-16.10	74.00	150	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

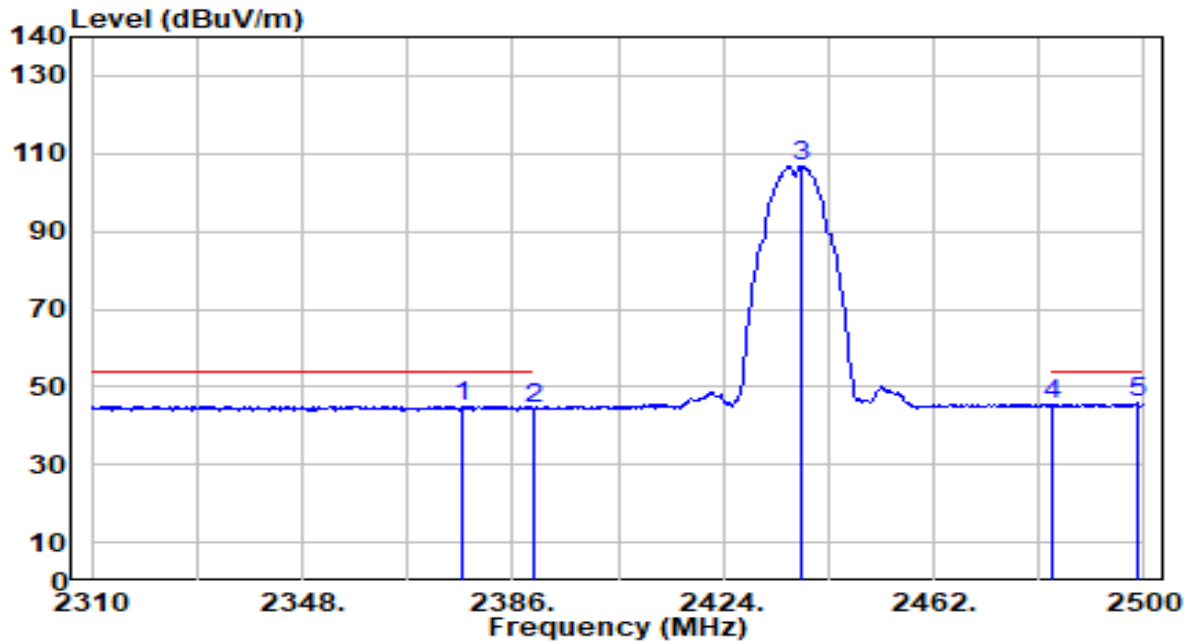


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2377.070	15.18	29.98	45.16	-8.84	54.00	150	188	Average
2	2390.000	14.60	29.99	44.59	-9.41	54.00	150	188	Average
3	2438.250	76.84	30.13	106.97	N/A	N/A	150	188	Average
4	2483.500	15.22	30.29	45.50	-8.50	54.00	150	188	Average
5	* 2498.860	15.38	30.34	45.72	-8.28	54.00	150	188	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

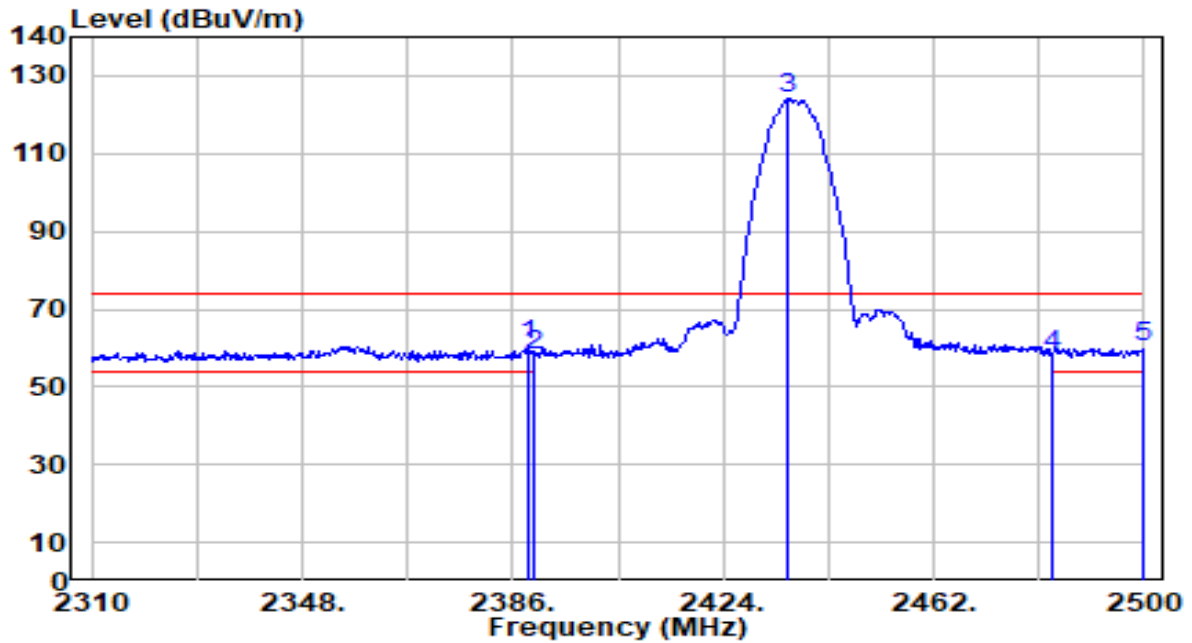


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.660	30.65	29.99	60.65	-13.35	74.00	160	2	Peak
2		2390.000	27.91	29.99	57.91	-16.09	74.00	160	2	Peak
3		2435.780	93.87	30.13	124.00	N/A	N/A	160	2	Peak
4		2483.500	28.09	30.29	58.37	-15.63	74.00	160	2	Peak
5		2500.000	29.72	30.34	60.06	-13.94	74.00	160	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

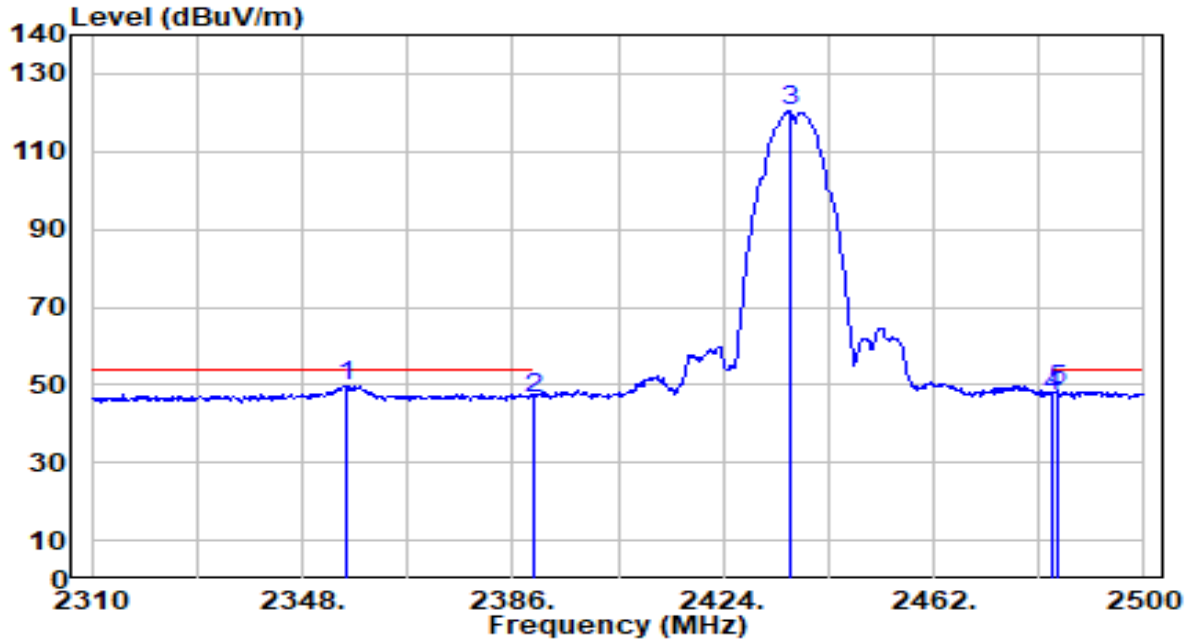


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2355.980	19.91	29.95	49.86	-4.14	54.00	160	2	Average
2	2390.000	16.76	29.99	46.75	-7.25	54.00	160	2	Average
3	2435.970	90.26	30.13	120.39	N/A	N/A	160	2	Average
4	2483.500	16.90	30.29	47.19	-6.81	54.00	160	2	Average
5	2484.230	18.42	30.29	48.71	-5.29	54.00	160	2	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

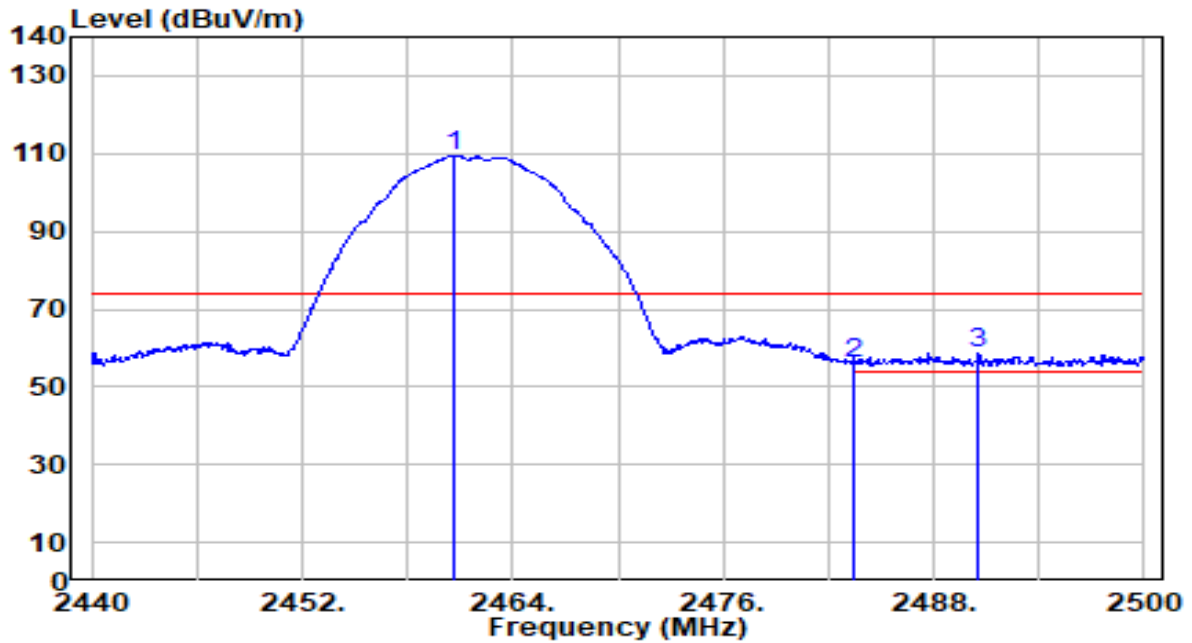


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.700	79.23	30.21	109.44	N/A	N/A	100	254	Peak
2	2483.500	25.58	30.29	55.87	-18.13	74.00	100	254	Peak
3	* 2490.580	28.54	30.31	58.85	-15.15	74.00	100	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

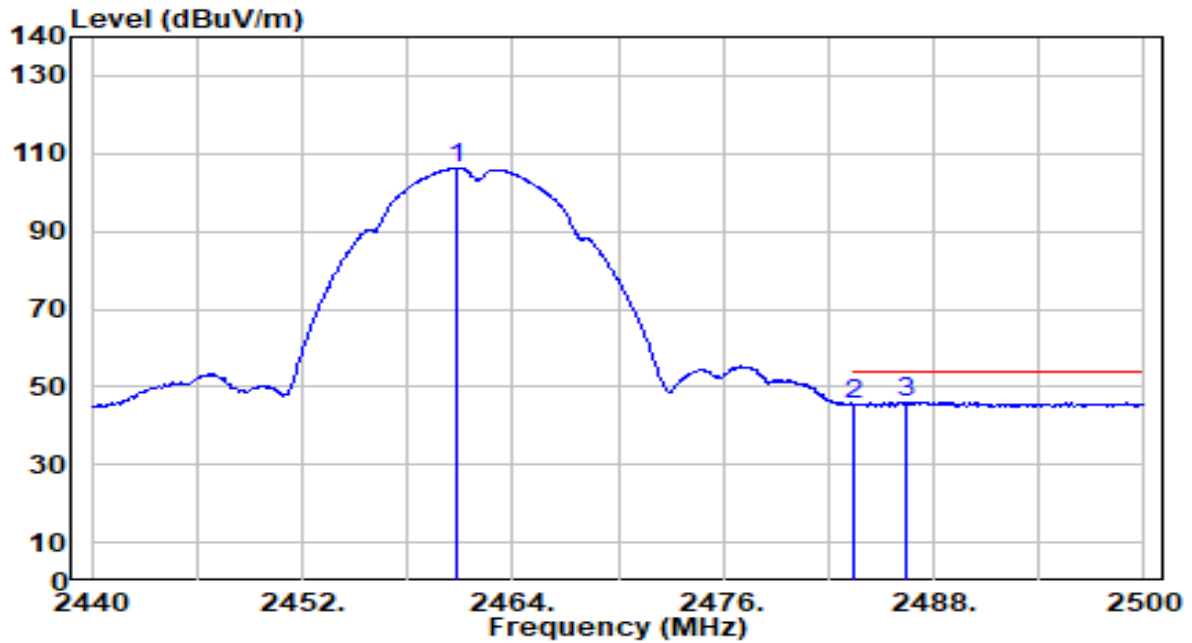


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.880	76.17	30.21	106.38	N/A	N/A	100	254	Average
2	2483.500	15.13	30.29	45.42	-8.58	54.00	100	254	Average
3	* 2486.380	15.84	30.29	46.13	-7.87	54.00	100	254	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

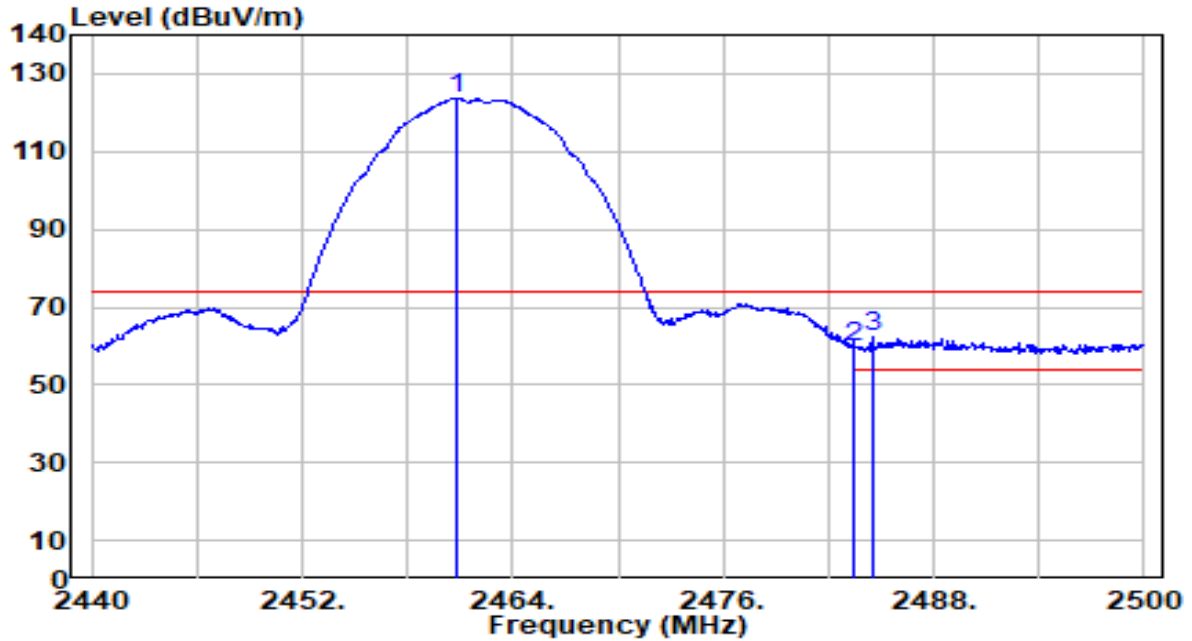


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.880	93.34	30.21	123.55	N/A	N/A	176	3	Peak
2	2483.500	29.34	30.29	59.63	-14.37	74.00	176	3	Peak
3	* 2484.520	31.89	30.29	62.17	-11.83	74.00	176	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

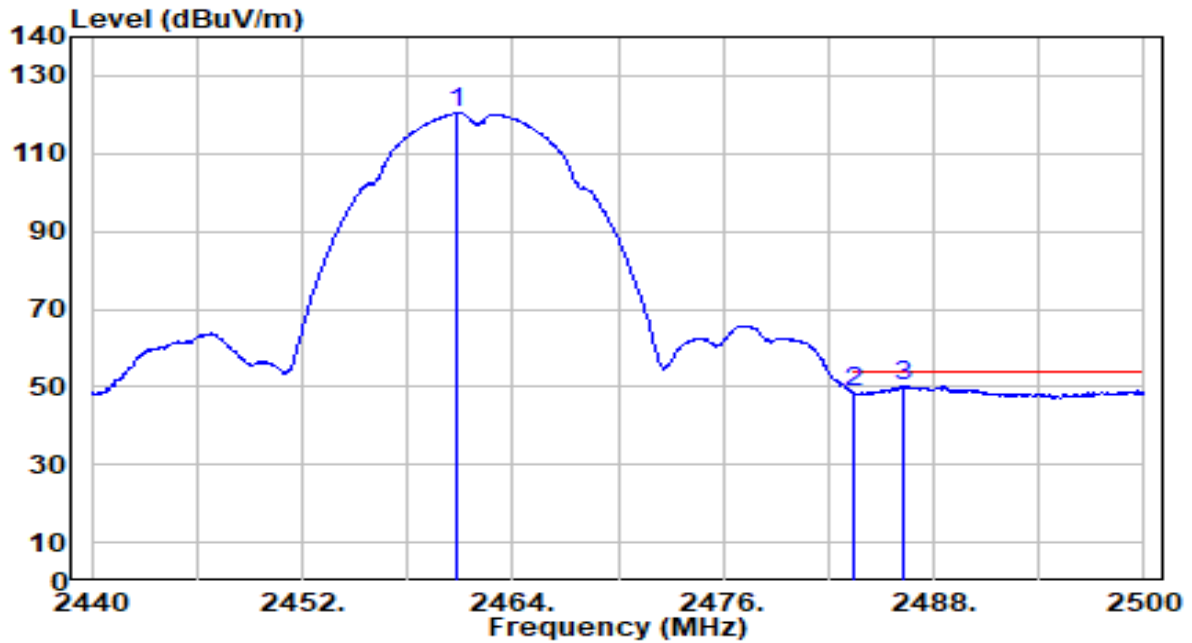


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	90.17	30.21	120.38	N/A	N/A	176	3	Average
2	2483.500	18.15	30.29	48.44	-5.56	54.00	176	3	Average
3	* 2486.320	20.00	30.29	50.29	-3.71	54.00	176	3	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

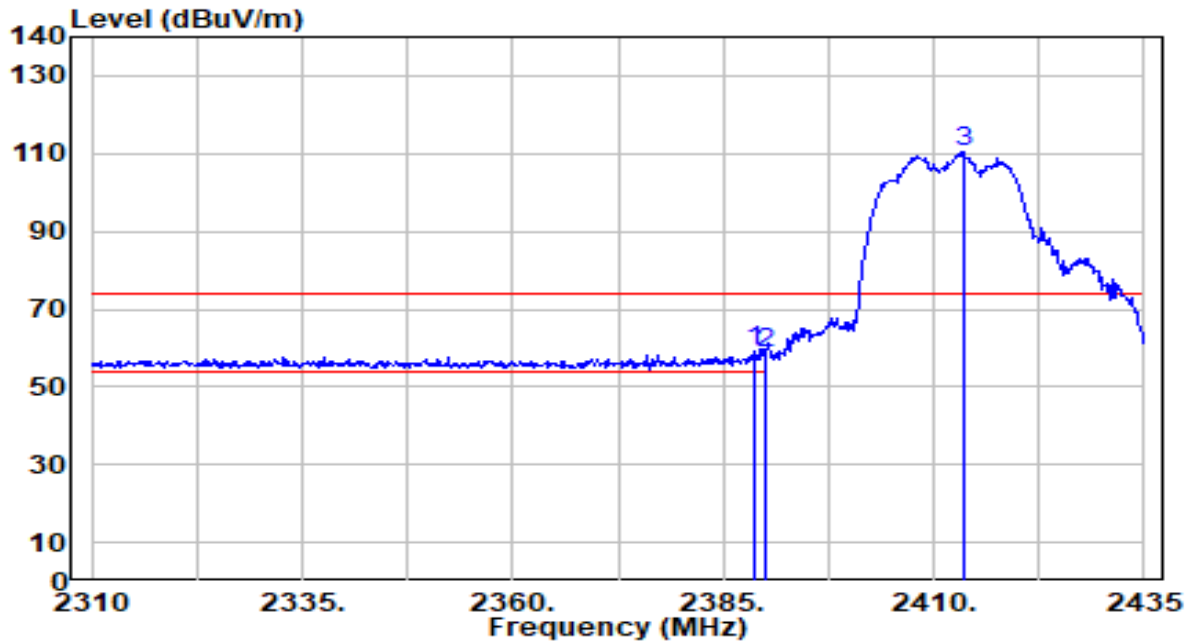


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.750	29.42	29.99	59.41	-14.59	74.00	174	153	Peak
2		2390.000	28.40	29.99	58.39	-15.61	74.00	174	153	Peak
3		2413.500	80.60	30.05	110.65	N/A	N/A	174	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

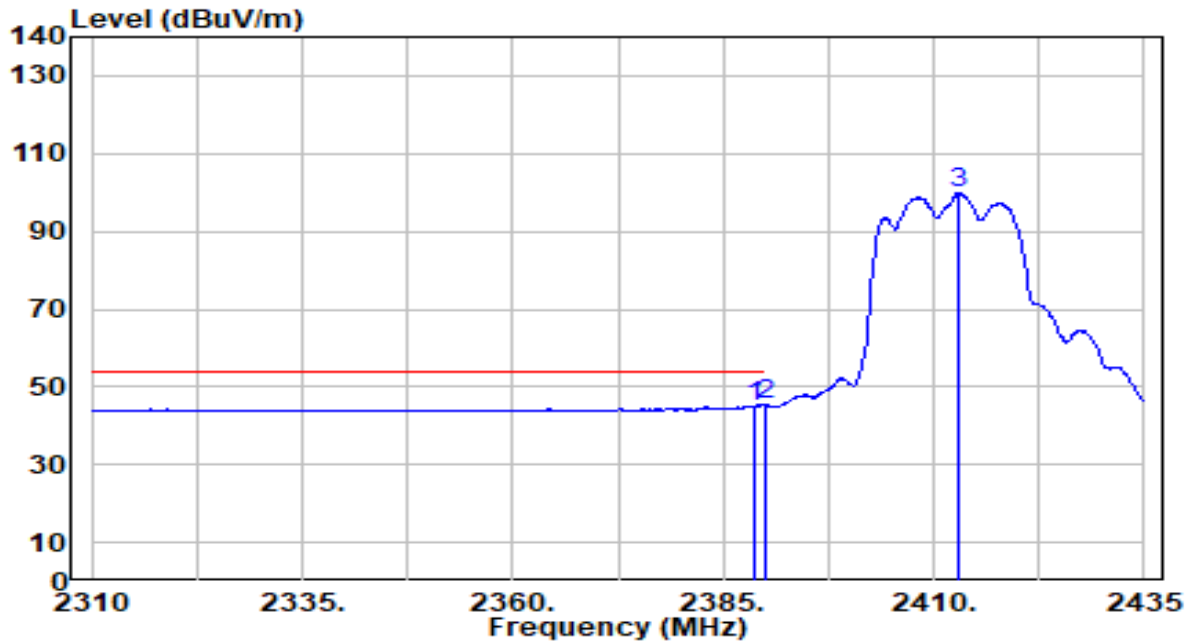


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	15.09	29.99	45.08	-8.92	54.00	174	153	Average
2	* 2390.000	15.23	29.99	45.22	-8.78	54.00	174	153	Average
3	2413.000	69.90	30.05	99.95	N/A	N/A	174	153	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

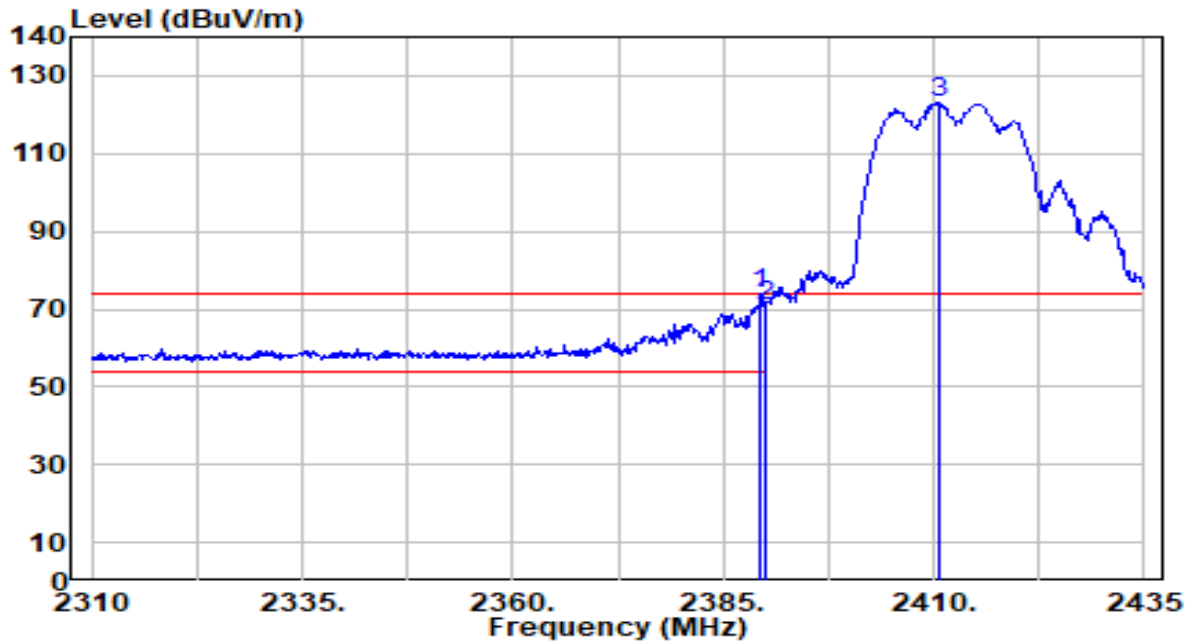


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.500	43.81	29.99	73.81	-0.19	74.00	172	183	Peak
2		2390.000	40.55	29.99	70.55	-3.45	74.00	172	183	Peak
3		2410.500	93.25	30.04	123.30	N/A	N/A	172	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

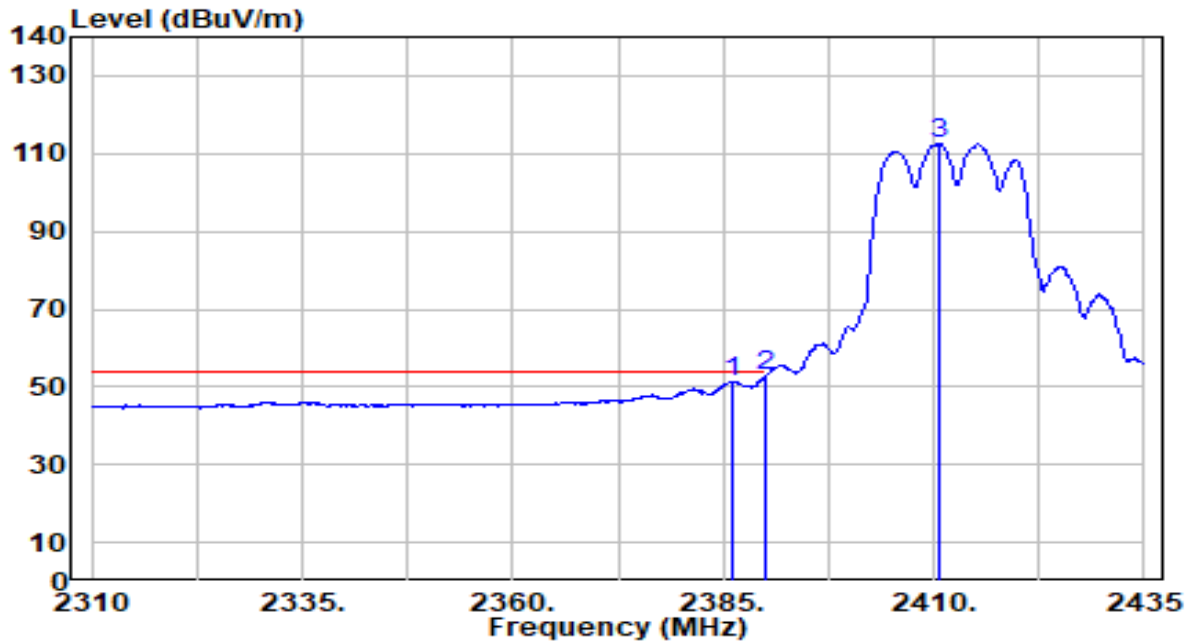


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	21.51	29.99	51.50	-2.50	54.00	172	183	Average
2	* 2390.000	22.63	29.99	52.63	-1.37	54.00	172	183	Average
3	2410.750	82.55	30.04	112.59	N/A	N/A	172	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

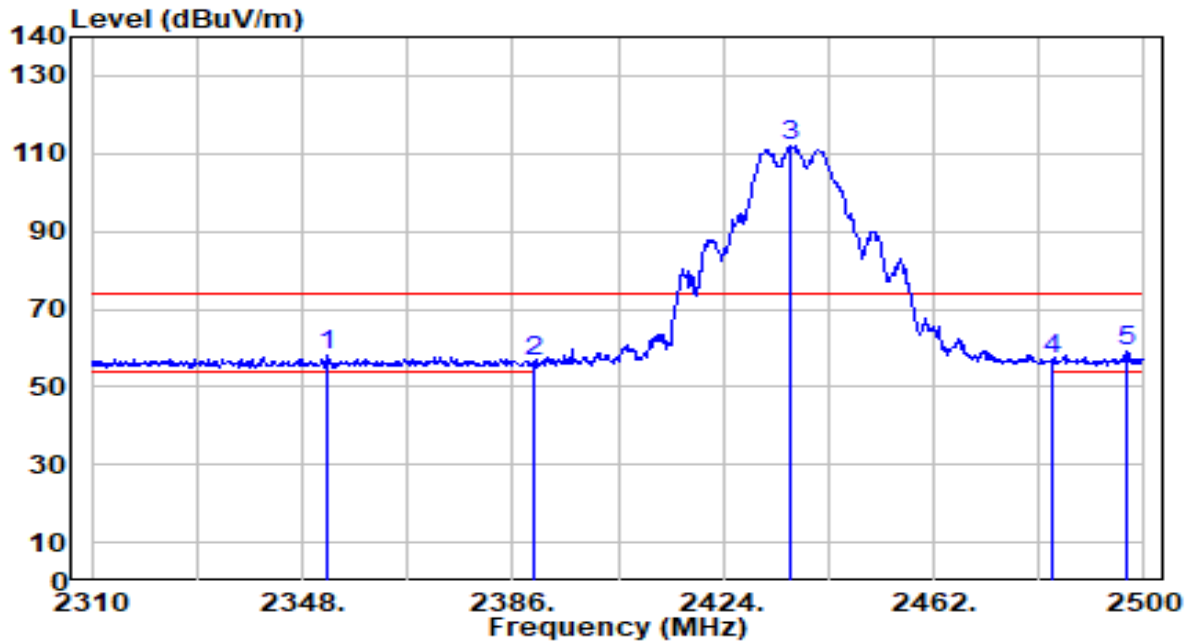


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2352.370	27.94	29.95	57.88	-16.12	74.00	150	188	Peak
2	2390.000	26.62	29.99	56.61	-17.39	74.00	150	188	Peak
3	2436.160	81.88	30.13	112.01	N/A	N/A	150	188	Peak
4	2483.500	26.73	30.29	57.02	-16.98	74.00	150	188	Peak
5	* 2496.960	28.58	30.33	58.91	-15.09	74.00	150	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

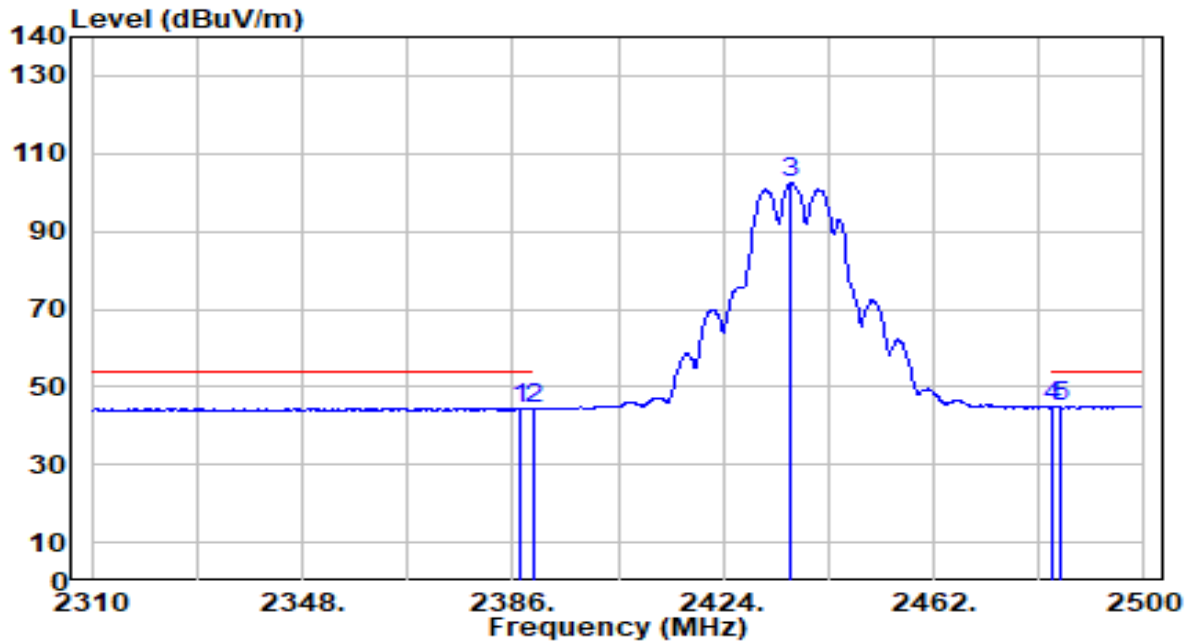


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	14.45	29.99	44.44	-9.56	54.00	150	188	Average
2	2390.000	14.30	29.99	44.29	-9.71	54.00	150	188	Average
3	2436.160	72.27	30.13	102.40	N/A	N/A	150	188	Average
4	2483.500	14.53	30.29	44.82	-9.18	54.00	150	188	Average
5	* 2484.990	14.65	30.29	44.94	-9.06	54.00	150	188	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

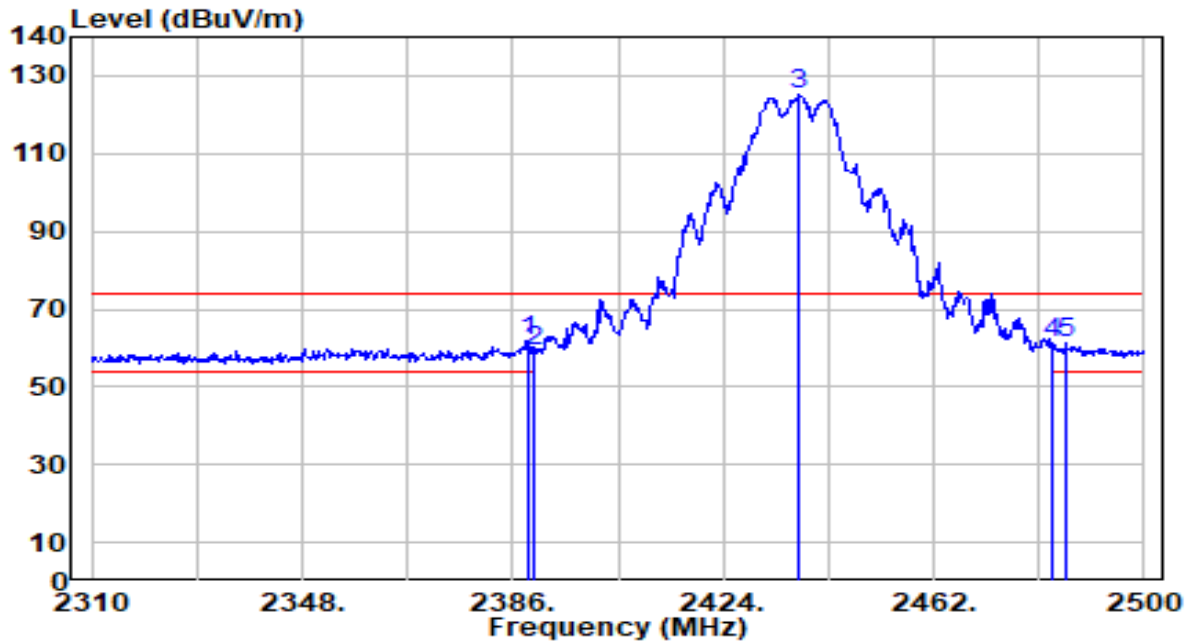


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.850	31.61	29.99	61.60	-12.40	74.00	195	2	Peak
2		2390.000	29.04	29.99	59.03	-14.97	74.00	195	2	Peak
3		2437.680	94.98	30.13	125.11	N/A	N/A	195	2	Peak
4		2483.500	30.98	30.29	61.27	-12.73	74.00	195	2	Peak
5		2485.940	30.86	30.29	61.16	-12.84	74.00	195	2	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

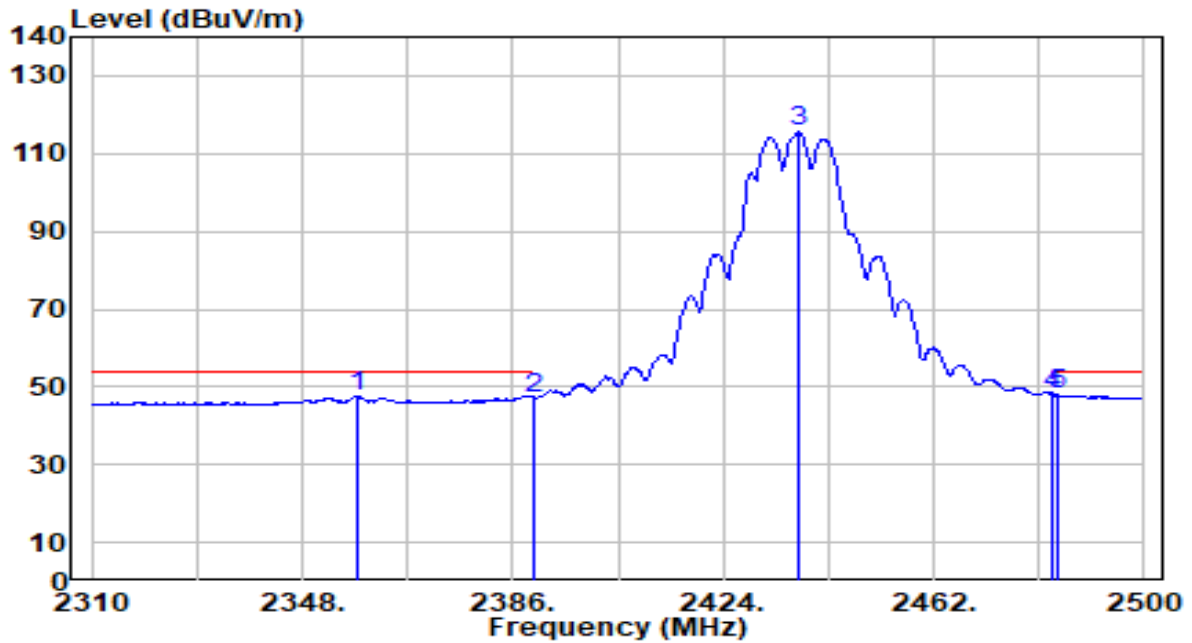


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2357.880	17.58	29.95	47.54	-6.46	54.00	195	2	Average
2	2390.000	17.13	29.99	47.12	-6.88	54.00	195	2	Average
3	2437.680	85.35	30.13	115.48	N/A	N/A	195	2	Average
4	* 2483.500	17.76	30.29	48.04	-5.96	54.00	195	2	Average
5	2484.230	17.60	30.29	47.89	-6.11	54.00	195	2	Average

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

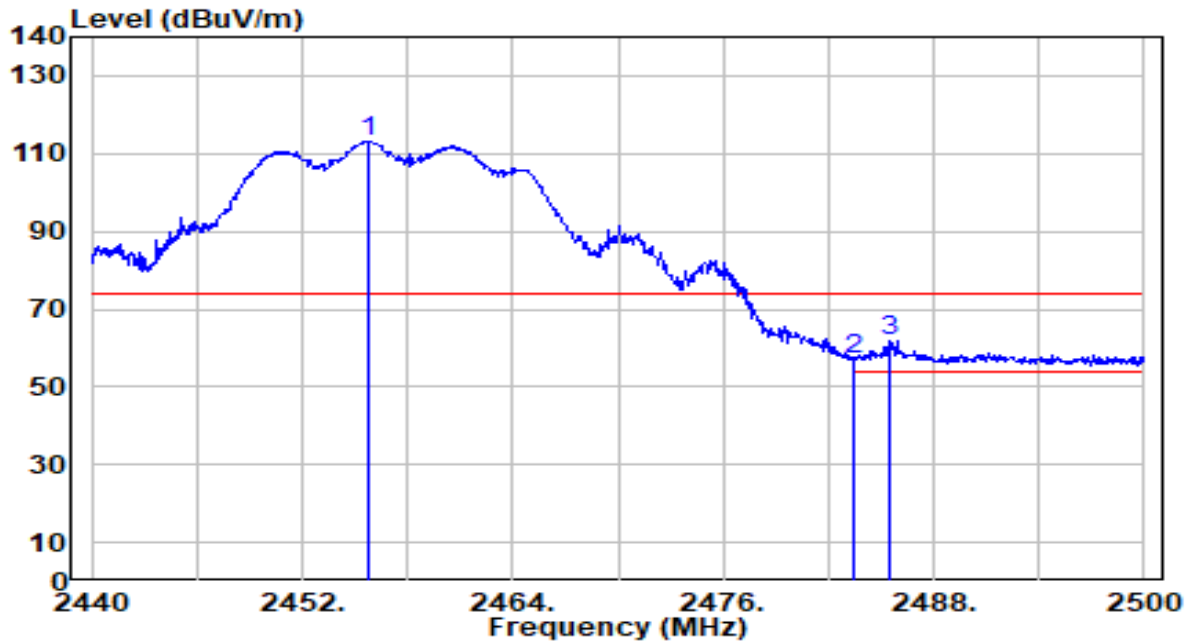


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.720	83.07	30.19	113.26	N/A	N/A	135	244	Peak
2	2483.500	27.00	30.29	57.29	-16.71	74.00	135	244	Peak
3	* 2485.420	31.45	30.29	61.74	-12.26	74.00	135	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

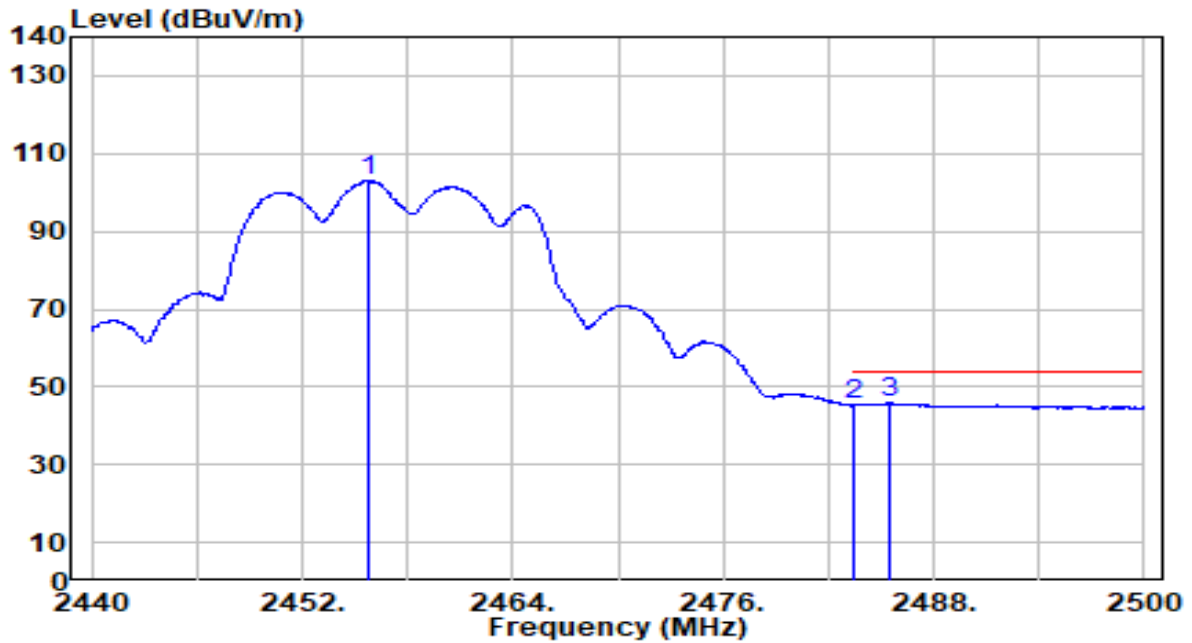


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.840	72.75	30.19	102.94	N/A	N/A	135	244	Average
2	2483.500	14.95	30.29	45.24	-8.76	54.00	135	244	Average
3	* 2485.480	15.67	30.29	45.96	-8.04	54.00	135	244	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

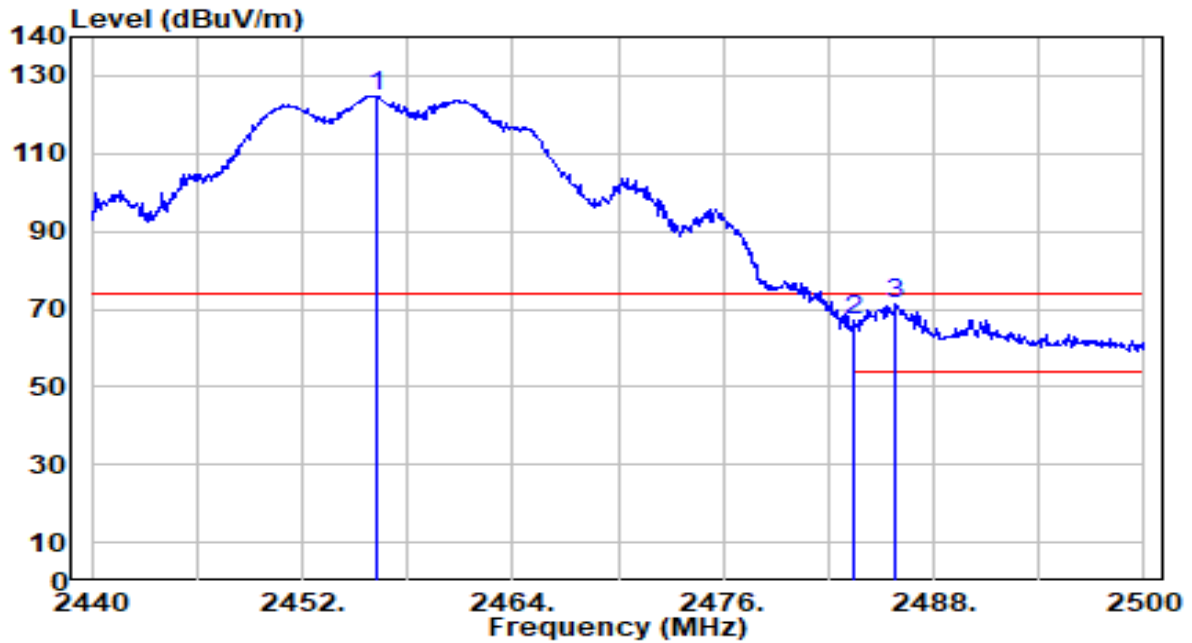


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.260	94.75	30.19	124.94	N/A	N/A	176	9	Peak
2	2483.500	36.95	30.29	67.23	-6.77	74.00	176	9	Peak
3	* 2485.780	40.93	30.29	71.22	-2.78	74.00	176	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

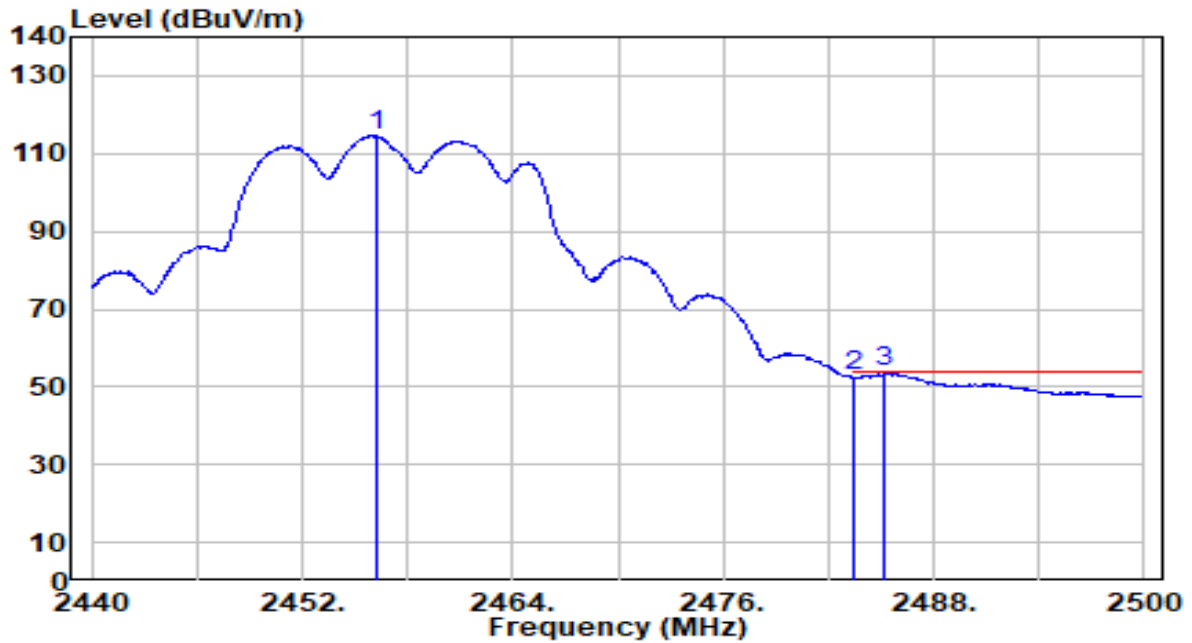


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.260	84.30	30.19	114.50	N/A	N/A	176	9	Average
2	2483.500	22.30	30.29	52.58	-1.42	54.00	176	9	Average
3	* 2485.180	23.46	30.29	53.75	-0.25	54.00	176	9	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

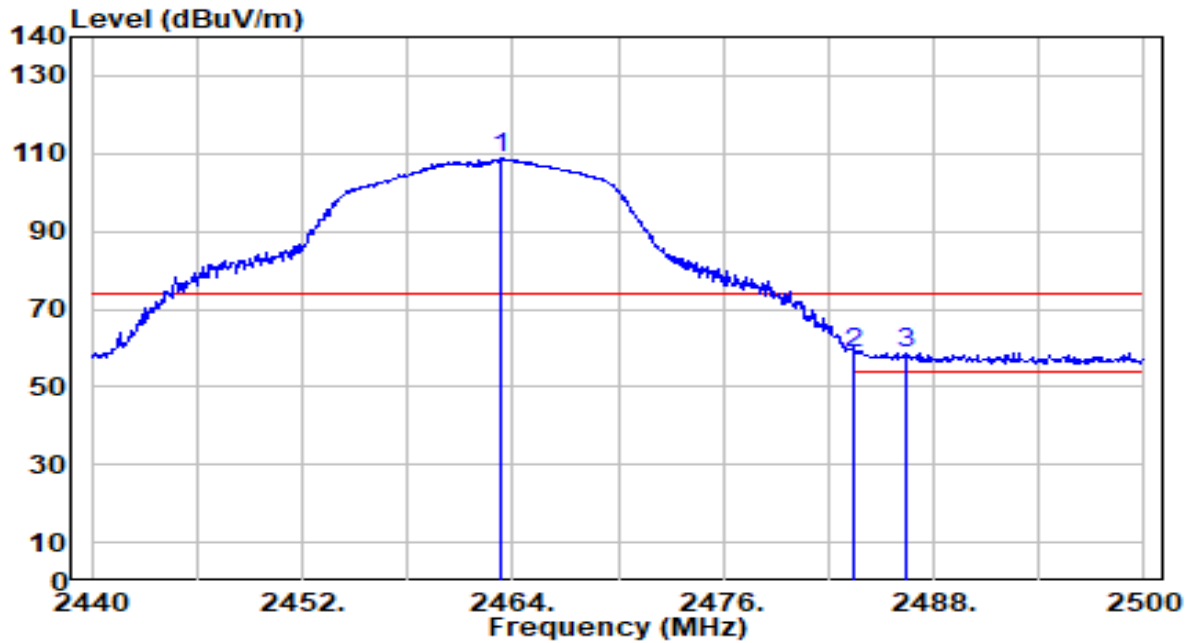


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.340	78.69	30.22	108.91	N/A	N/A	100	254	Peak
2	2483.500	28.32	30.29	58.61	-15.39	74.00	100	254	Peak
3	* 2486.500	28.57	30.30	58.86	-15.14	74.00	100	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

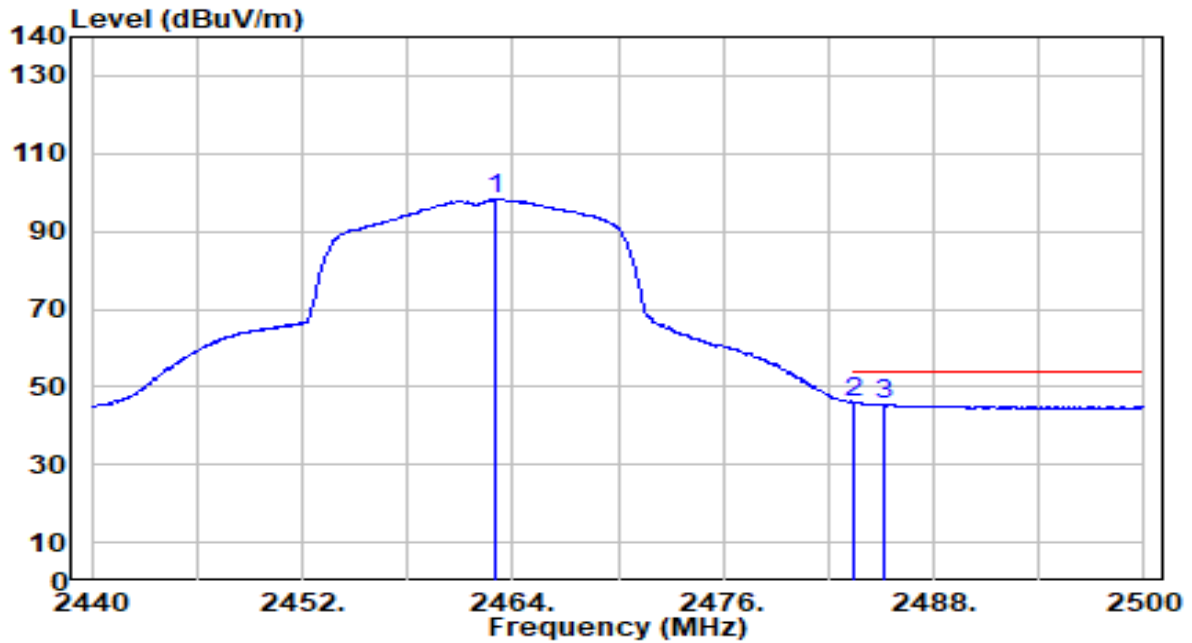


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	67.97	30.22	98.19	N/A	N/A	100	254	Average
2	* 2483.500	15.62	30.29	45.91	-8.09	54.00	100	254	Average
3	2485.120	15.29	30.29	45.58	-8.42	54.00	100	254	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

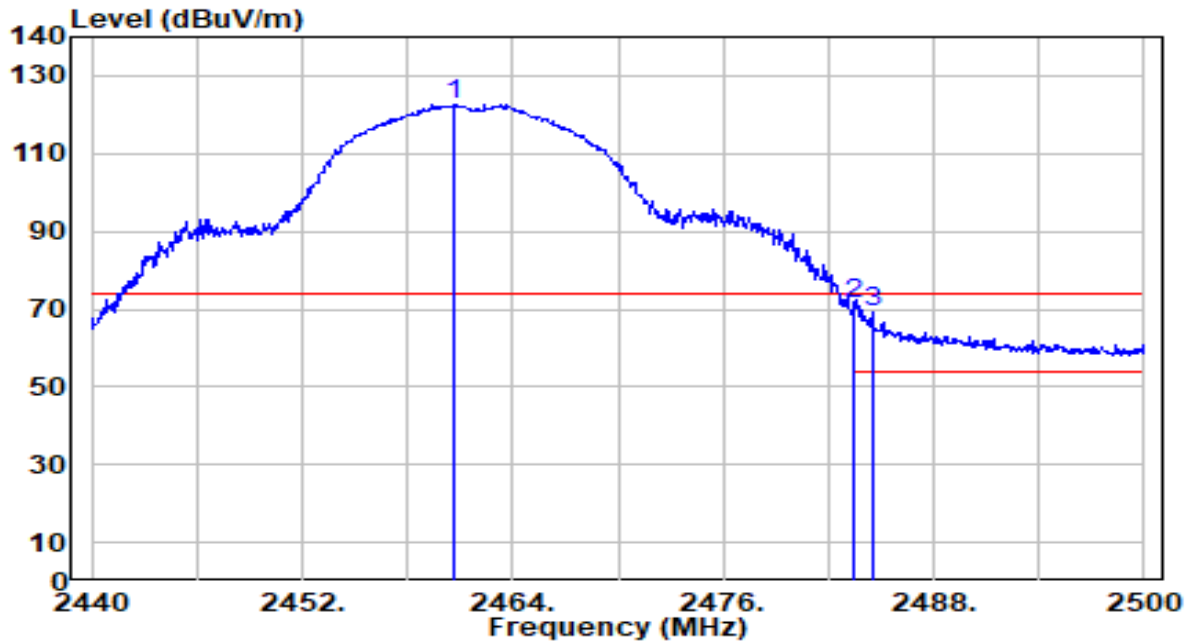


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	92.60	30.21	122.81	N/A	N/A	176	5	Peak
2	* 2483.500	41.17	30.29	71.45	-2.55	74.00	176	5	Peak
3	2484.520	38.86	30.29	69.15	-4.85	74.00	176	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

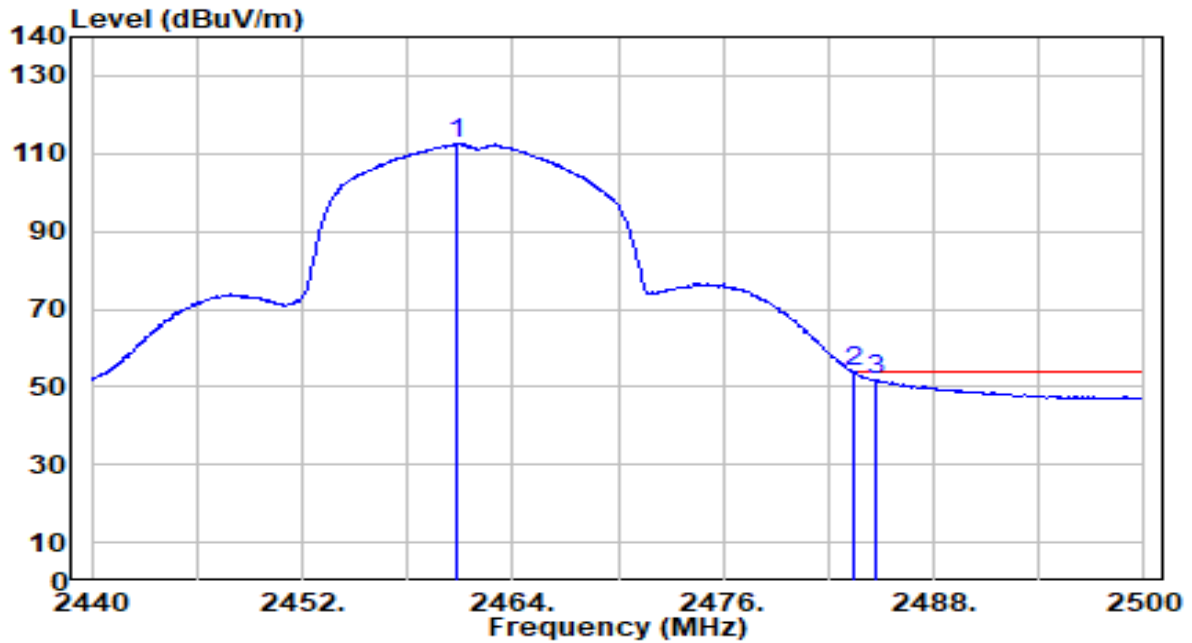


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.880	82.34	30.21	112.55	N/A	N/A	176	5	Average
2	* 2483.500	23.48	30.29	53.76	-0.24	54.00	176	5	Average
3	2484.700	21.48	30.29	51.77	-2.23	54.00	176	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

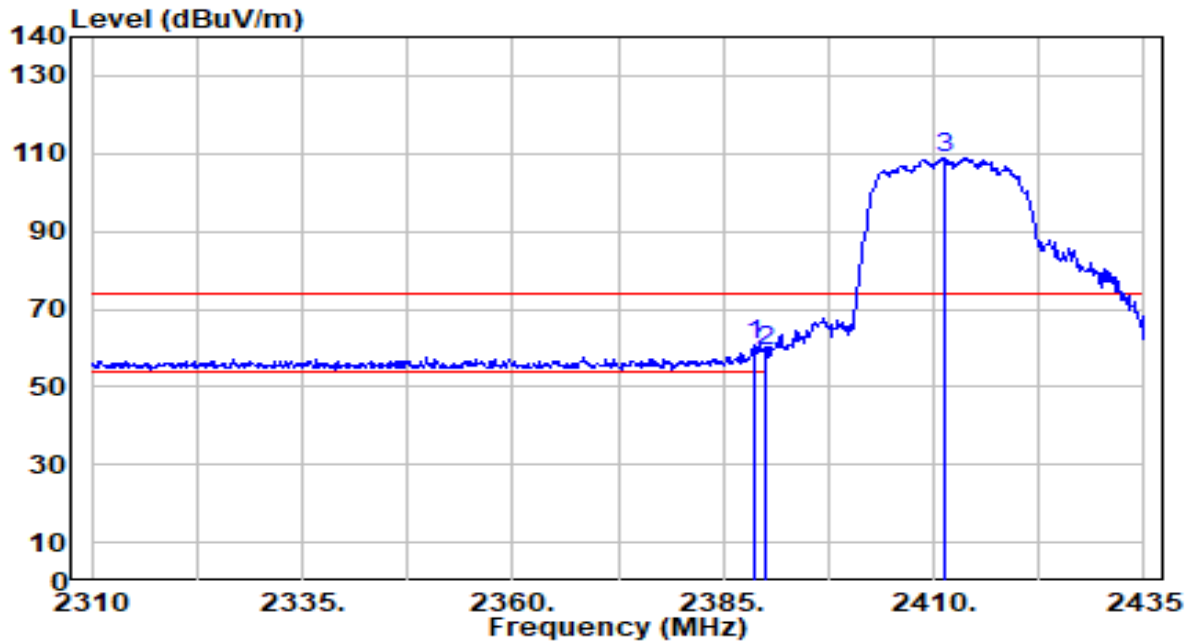


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	30.83	29.99	60.83	-13.17	74.00	175	152	Peak
2		29.18	29.99	59.17	-14.83	74.00	175	152	Peak
3		78.67	30.05	108.72	N/A	N/A	175	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

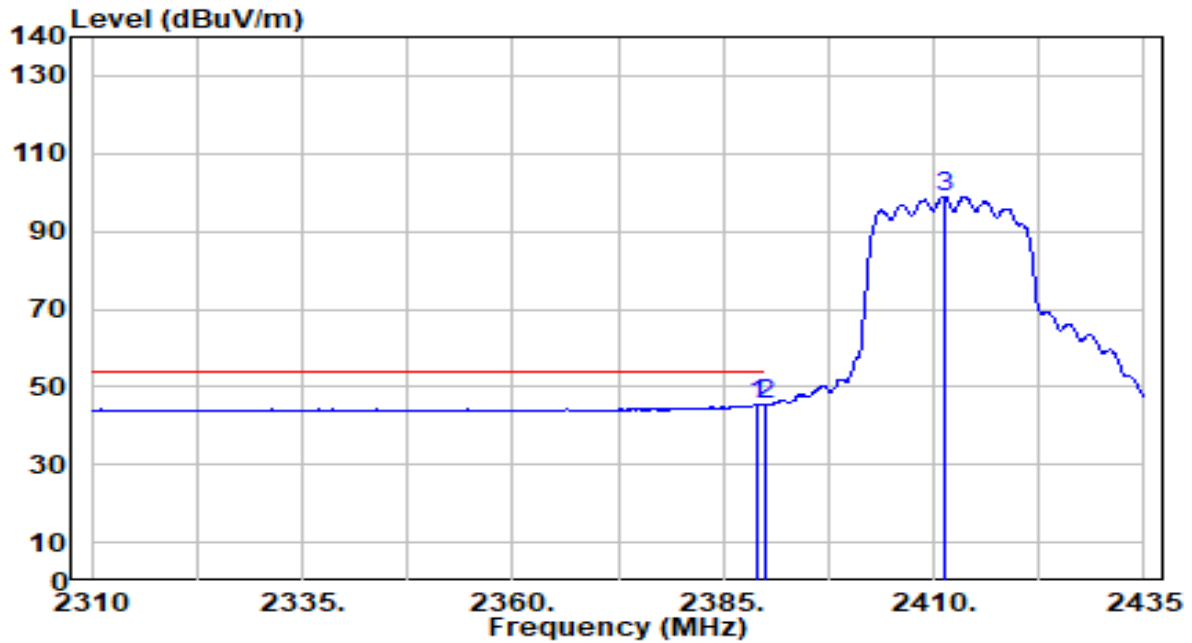


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	15.46	29.99	45.45	-8.55	54.00	175	152	Average
2	* 2390.000	15.53	29.99	45.53	-8.47	54.00	175	152	Average
3	2411.250	68.89	30.05	98.94	N/A	N/A	175	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

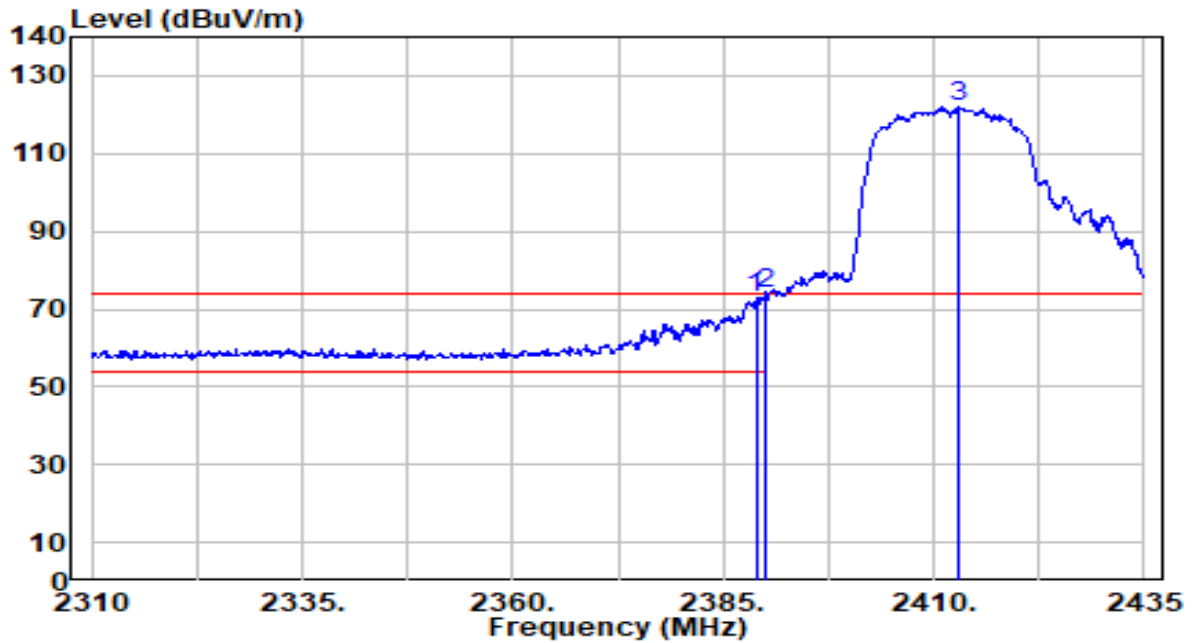


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	43.10	29.99	73.09	-0.91	74.00	200	193	Peak
2	* 2390.000	43.95	29.99	73.95	-0.05	74.00	200	193	Peak
3	2412.875	91.80	30.05	121.85	N/A	N/A	200	193	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

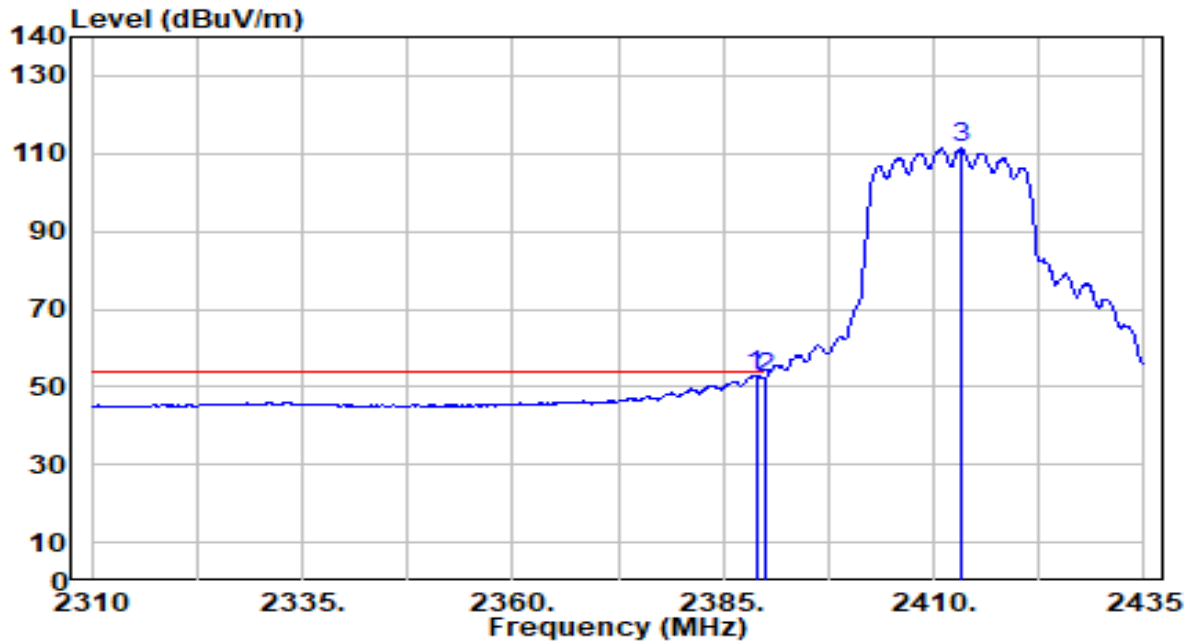


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.08	29.99	53.07	-0.93	54.00	200	193	Average
2		22.36	29.99	52.36	-1.64	54.00	200	193	Average
3		81.24	30.05	111.29	N/A	N/A	200	193	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

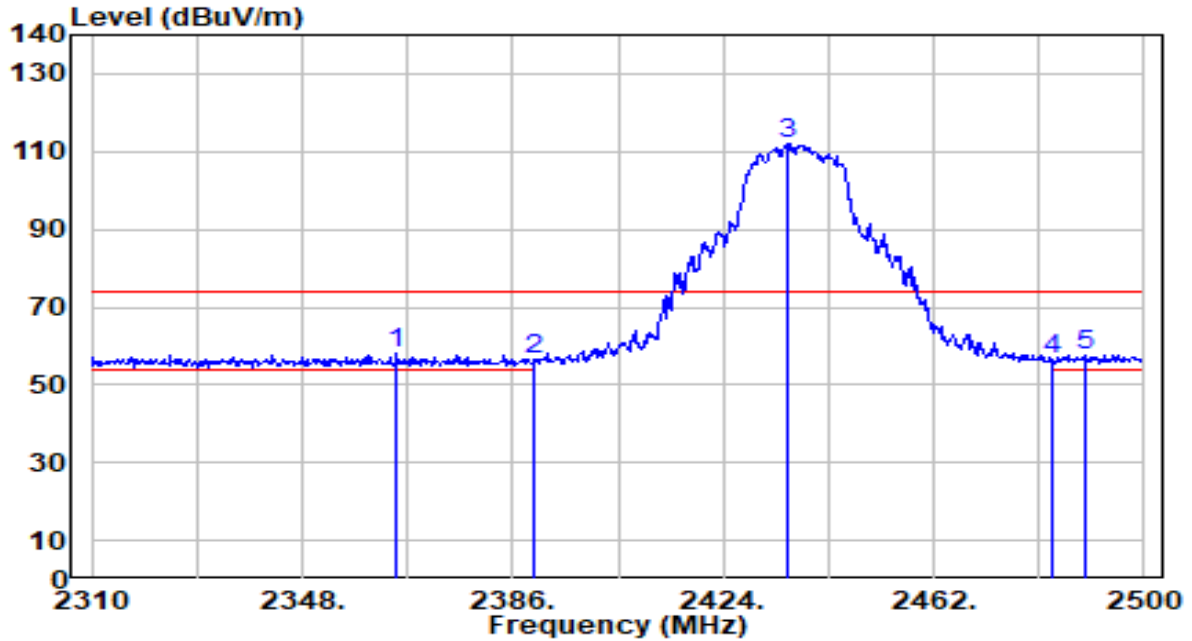


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2365.100	28.08	29.96	58.04	-15.96	74.00	150	188	Peak
2	2390.000	26.72	29.99	56.72	-17.28	74.00	150	188	Peak
3	2435.780	81.93	30.13	112.05	N/A	N/A	150	188	Peak
4	2483.500	26.23	30.29	56.52	-17.48	74.00	150	188	Peak
5	2489.170	27.13	30.30	57.43	-16.57	74.00	150	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

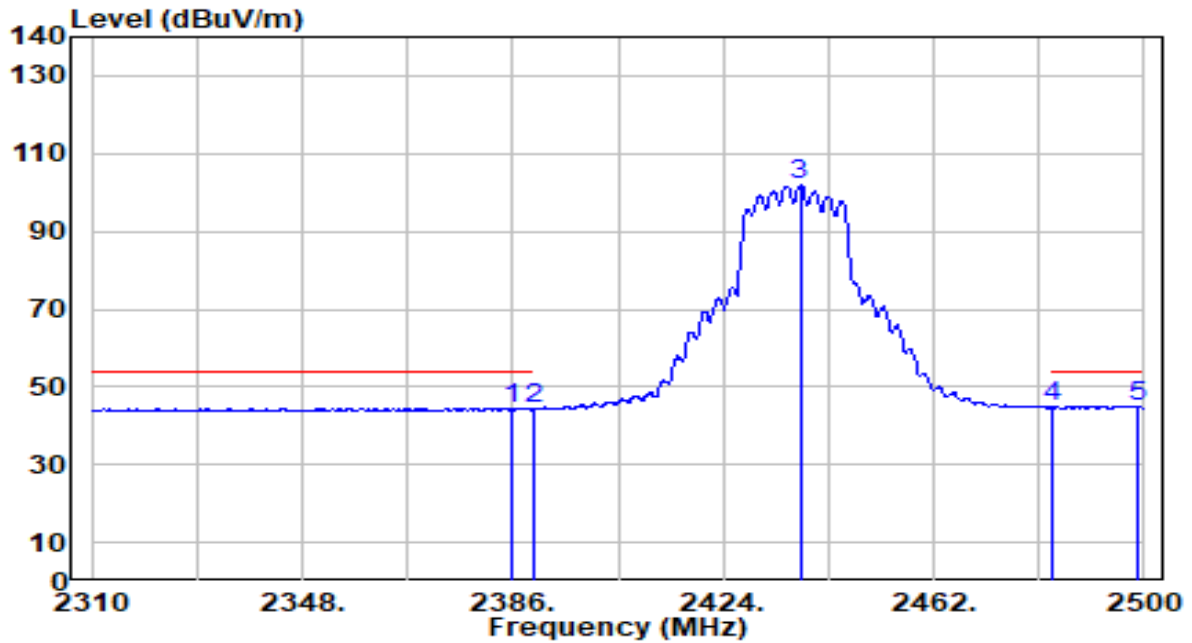


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	14.46	29.99	44.45	-9.55	54.00	150	188	Average
2	2390.000	14.24	29.99	44.23	-9.77	54.00	150	188	Average
3	2437.870	71.94	30.13	102.07	N/A	N/A	150	188	Average
4	2483.500	14.43	30.29	44.71	-9.29	54.00	150	188	Average
5	* 2498.860	14.62	30.34	44.96	-9.04	54.00	150	188	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

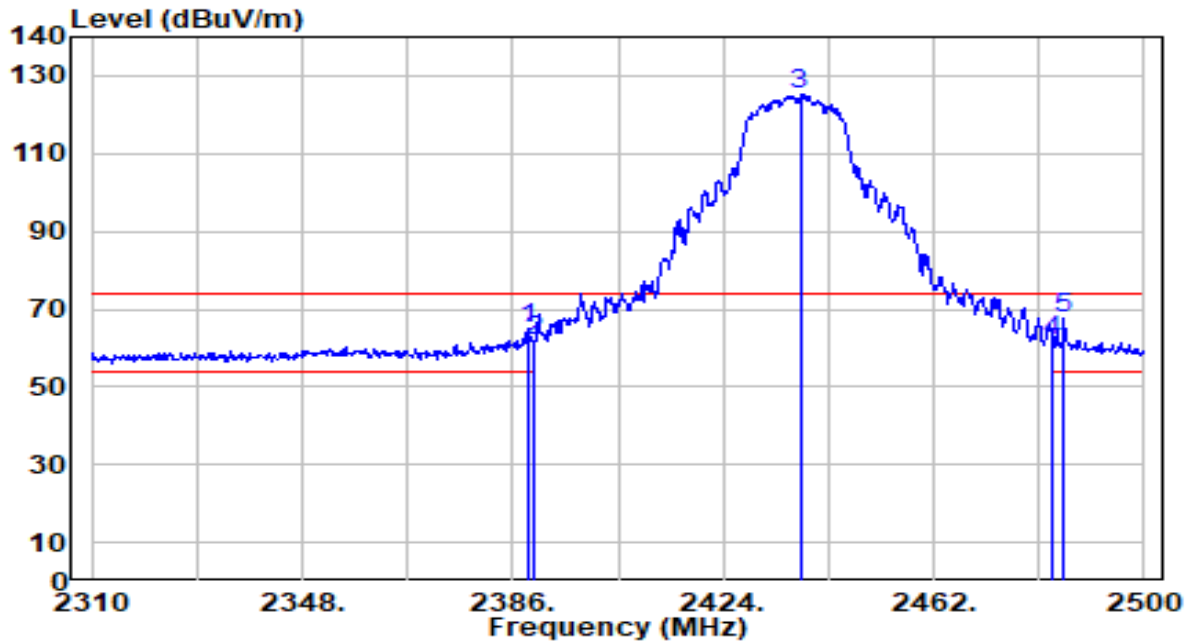


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	34.98	29.99	64.97	-9.03	74.00	192	5	Peak
2	2390.000	31.62	29.99	61.61	-12.39	74.00	192	5	Peak
3	2437.870	95.10	30.13	125.23	N/A	N/A	192	5	Peak
4	2483.500	31.74	30.29	62.02	-11.98	74.00	192	5	Peak
5	* 2485.560	37.47	30.29	67.76	-6.24	74.00	192	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

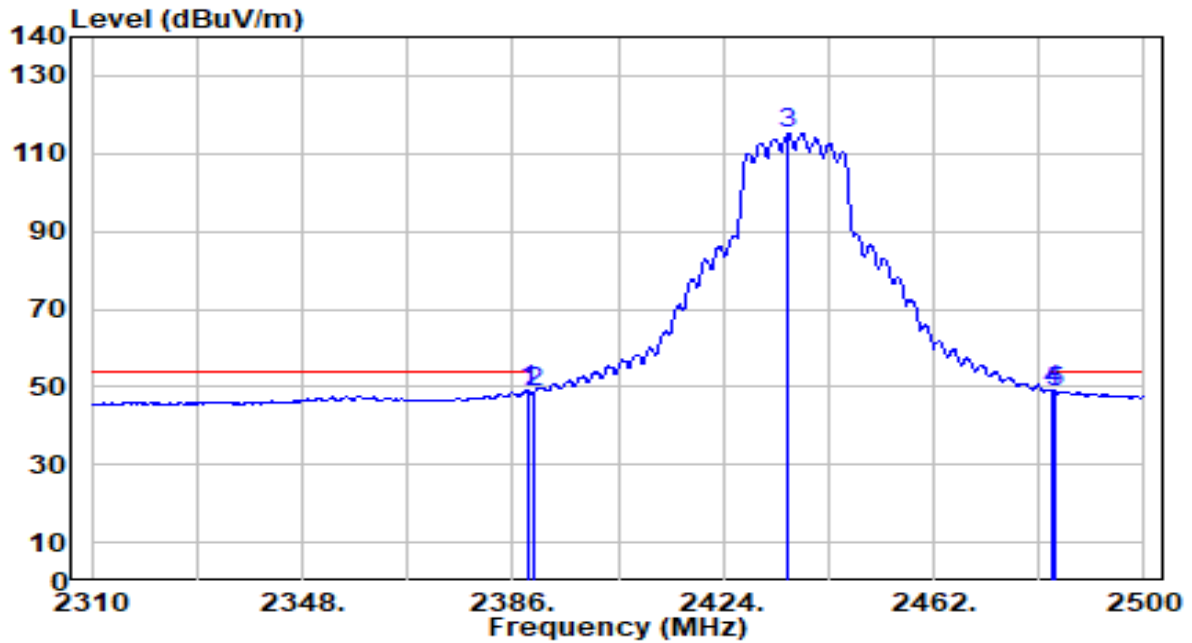


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	19.07	29.99	49.06	-4.94	54.00	192	5	Average
2	2390.000	18.73	29.99	48.73	-5.27	54.00	192	5	Average
3	2435.590	84.96	30.13	115.09	N/A	N/A	192	5	Average
4	* 2483.500	18.95	30.29	49.24	-4.76	54.00	192	5	Average
5	2484.040	18.53	30.29	48.81	-5.19	54.00	192	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

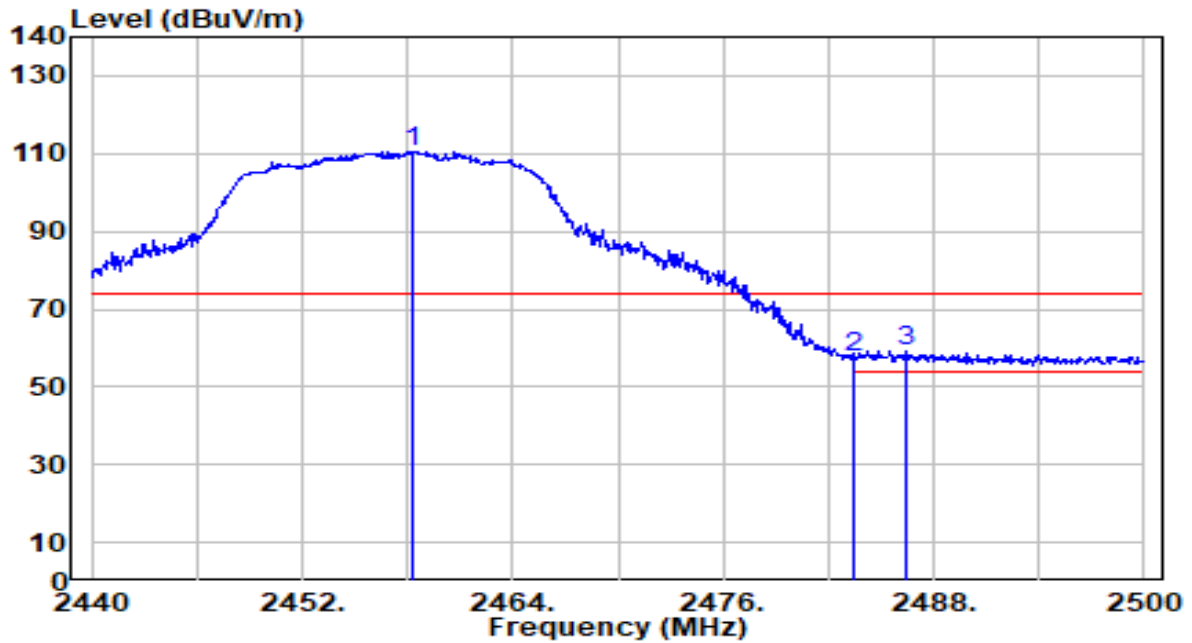


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.300	80.44	30.20	110.64	N/A	N/A	100	242	Peak
2	2483.500	27.06	30.29	57.34	-16.66	74.00	100	242	Peak
3	* 2486.440	28.96	30.29	59.26	-14.74	74.00	100	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

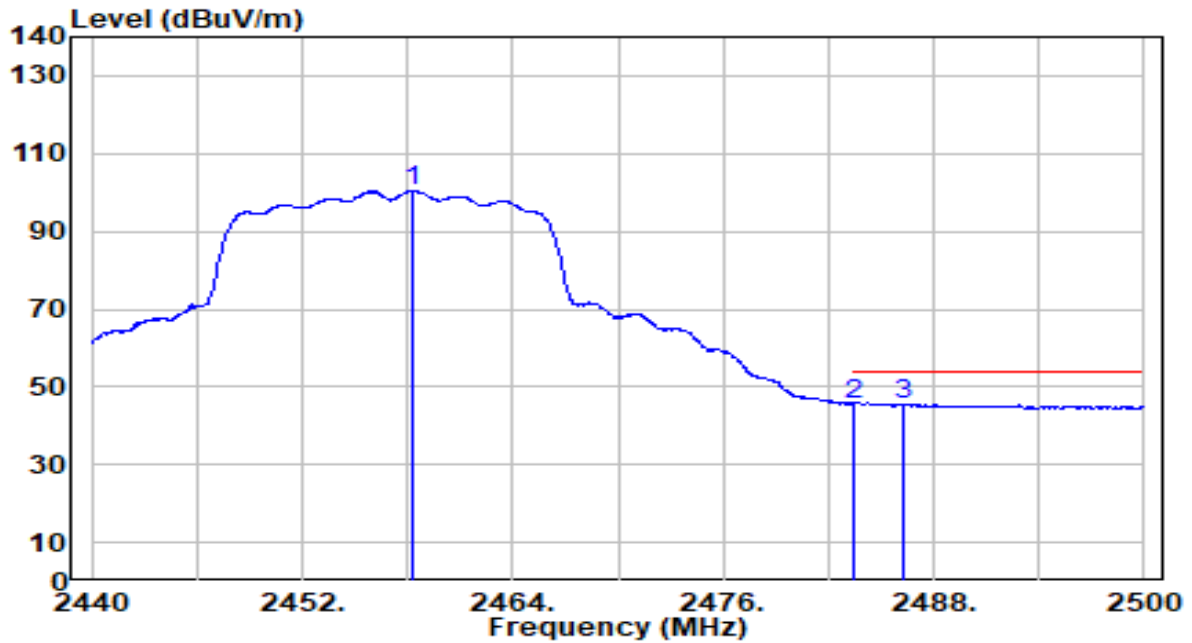


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.360	70.31	30.20	100.51	N/A	N/A	100	242	Average
2	2483.500	15.33	30.29	45.62	-8.38	54.00	100	242	Average
3	* 2486.200	15.34	30.29	45.63	-8.37	54.00	100	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

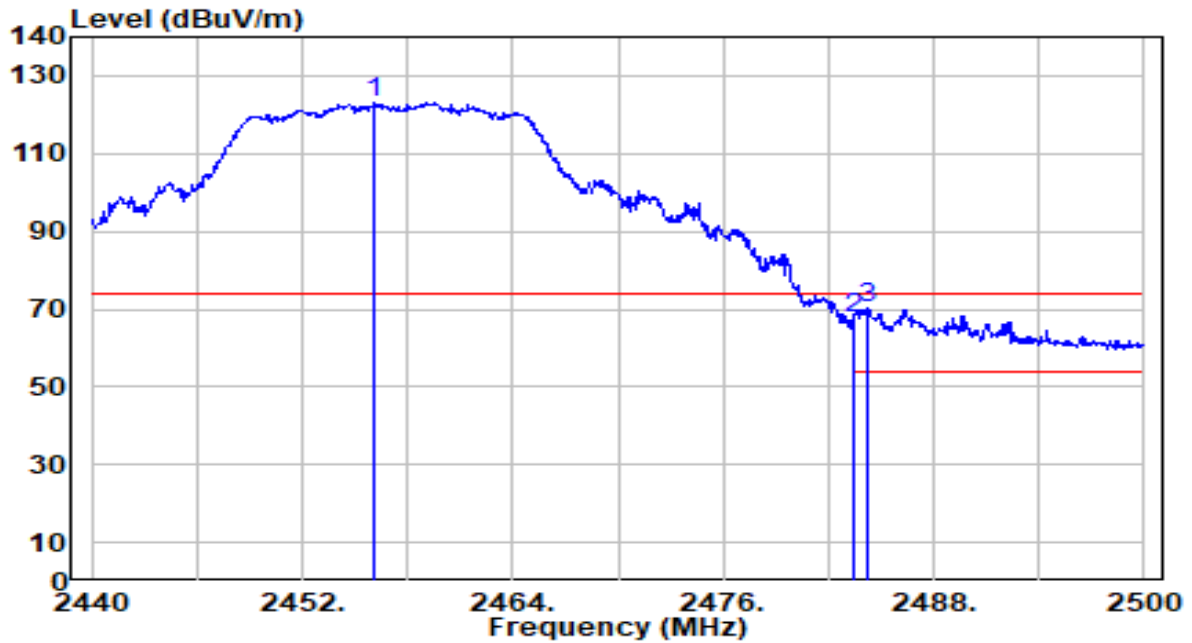


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.140	92.92	30.19	123.11	N/A	N/A	176	6	Peak
2	2483.500	37.27	30.29	67.56	-6.44	74.00	176	6	Peak
3	* 2484.280	40.02	30.29	70.31	-3.69	74.00	176	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

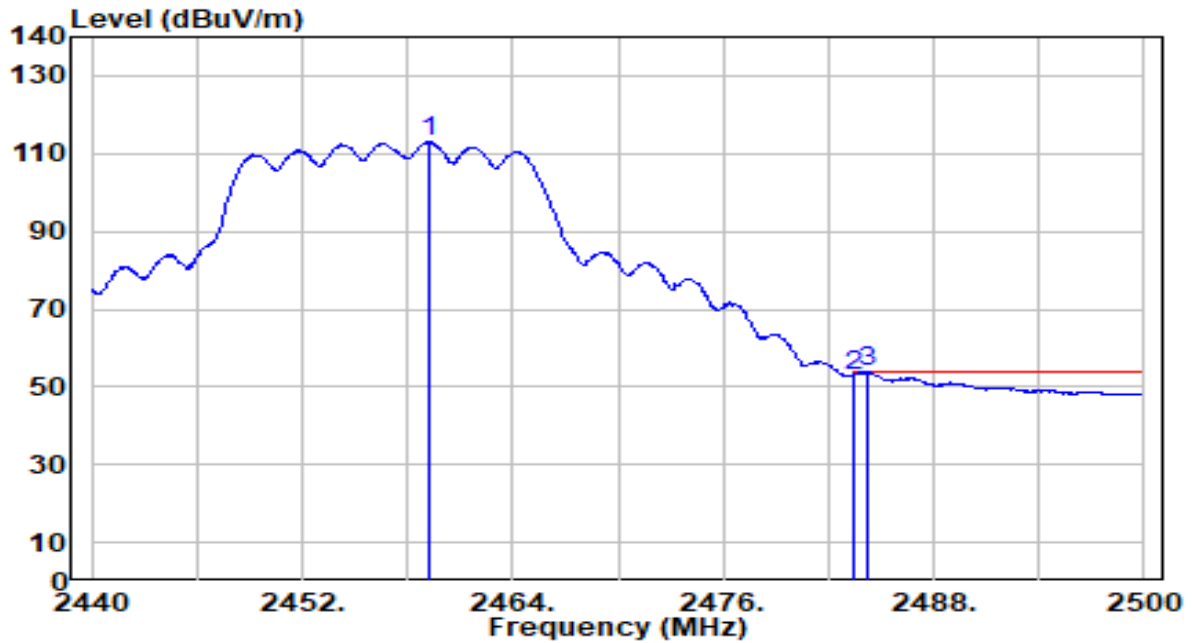


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.260	82.92	30.20	113.13	N/A	N/A	176	6	Average
2	2483.500	22.77	30.29	53.05	-0.95	54.00	176	6	Average
3	* 2484.280	23.45	30.29	53.73	-0.27	54.00	176	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

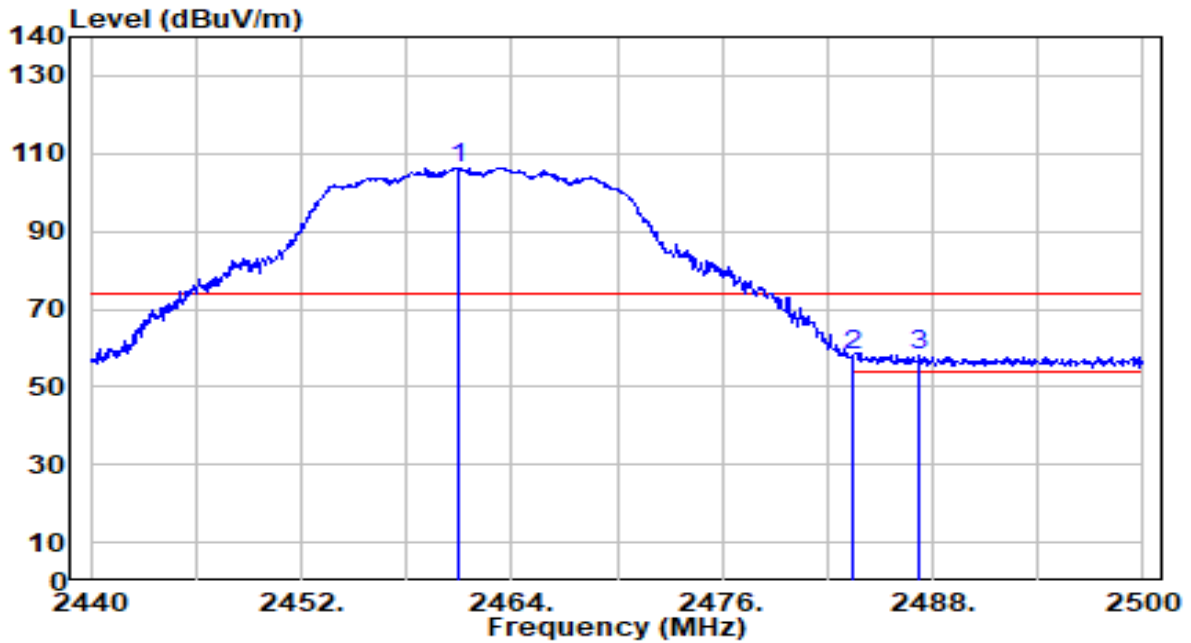


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	76.15	30.21	106.36	N/A	N/A	100	254	Peak
2	2483.500	27.58	30.29	57.87	-16.13	74.00	100	254	Peak
3	* 2487.280	27.89	30.30	58.19	-15.81	74.00	100	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

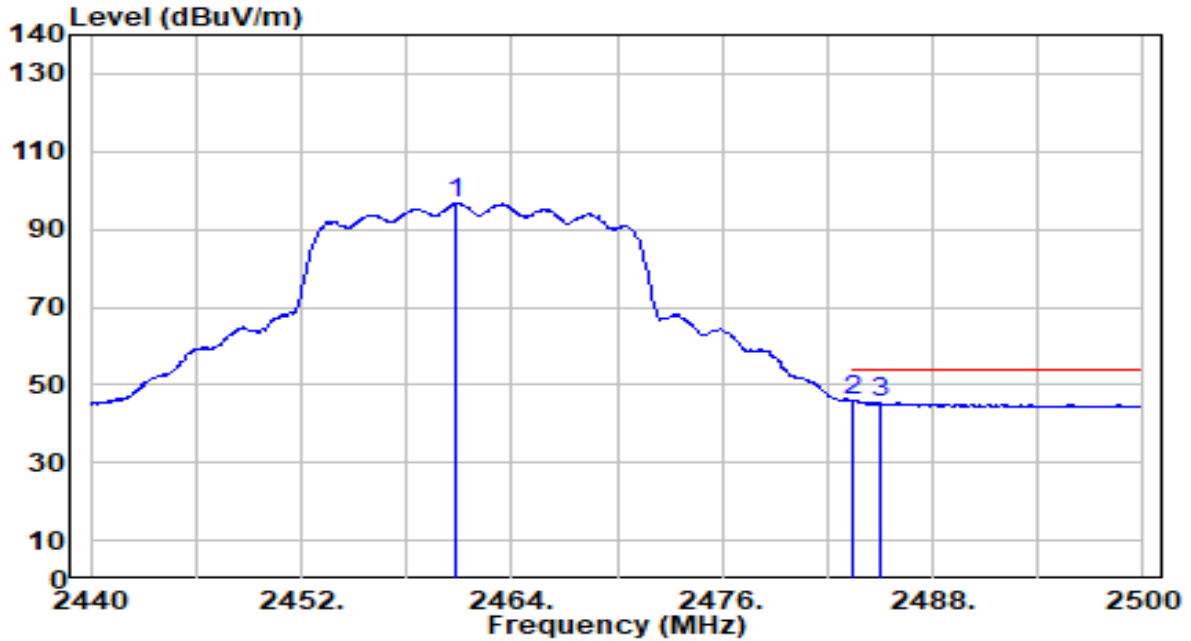


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	66.49	30.21	96.70	N/A	N/A	100	254	Average
2	* 2483.500	15.45	30.29	45.73	-8.27	54.00	100	254	Average
3	2485.060	15.16	30.29	45.45	-8.55	54.00	100	254	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

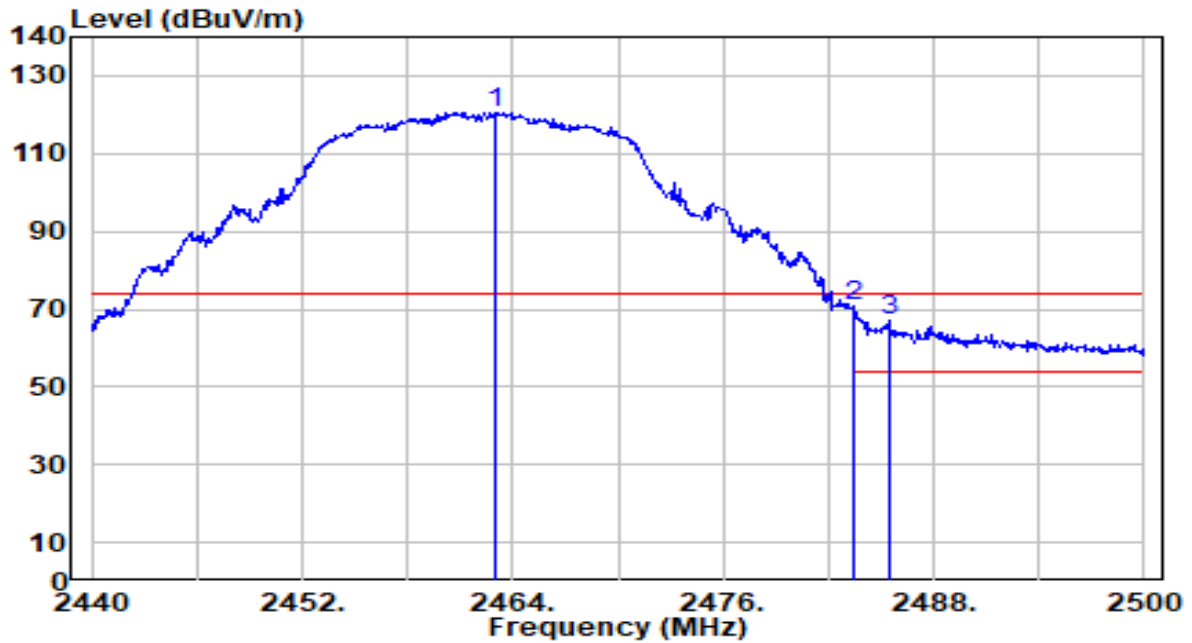


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	90.47	30.22	120.68	N/A	N/A	179	4	Peak
2	* 2483.500	40.41	30.29	70.70	-3.30	74.00	179	4	Peak
3	2485.420	36.77	30.29	67.06	-6.94	74.00	179	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

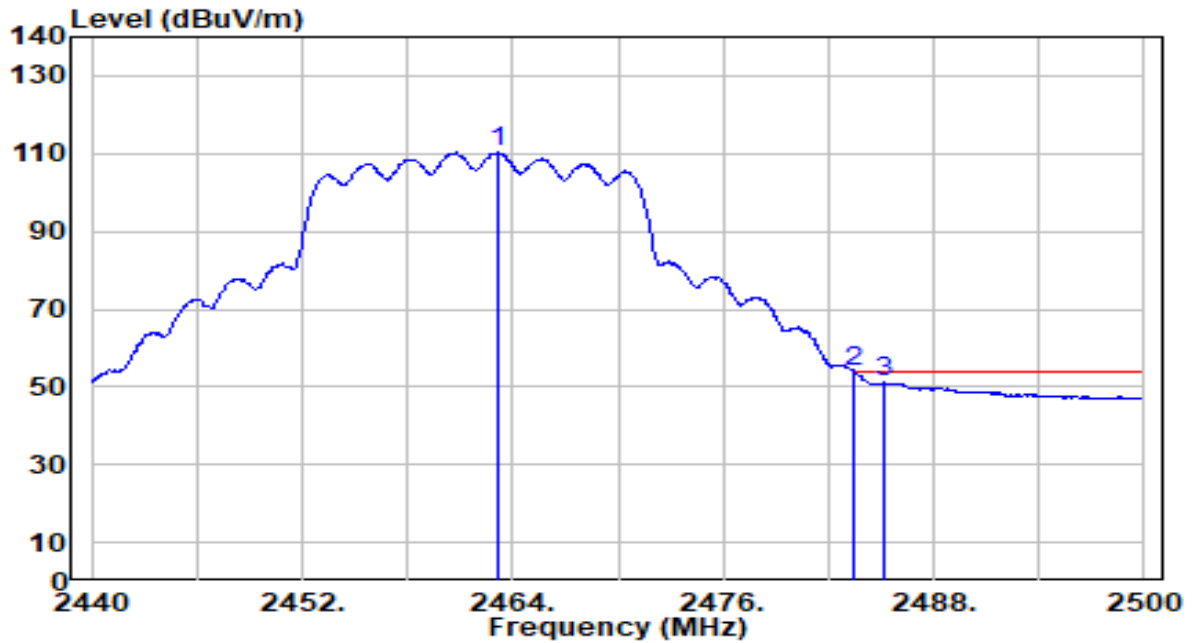


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.160	80.06	30.22	110.28	N/A	N/A	179	4	Average
2	* 2483.500	23.34	30.29	53.63	-0.37	54.00	179	4	Average
3	2485.180	20.93	30.29	51.22	-2.78	54.00	179	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

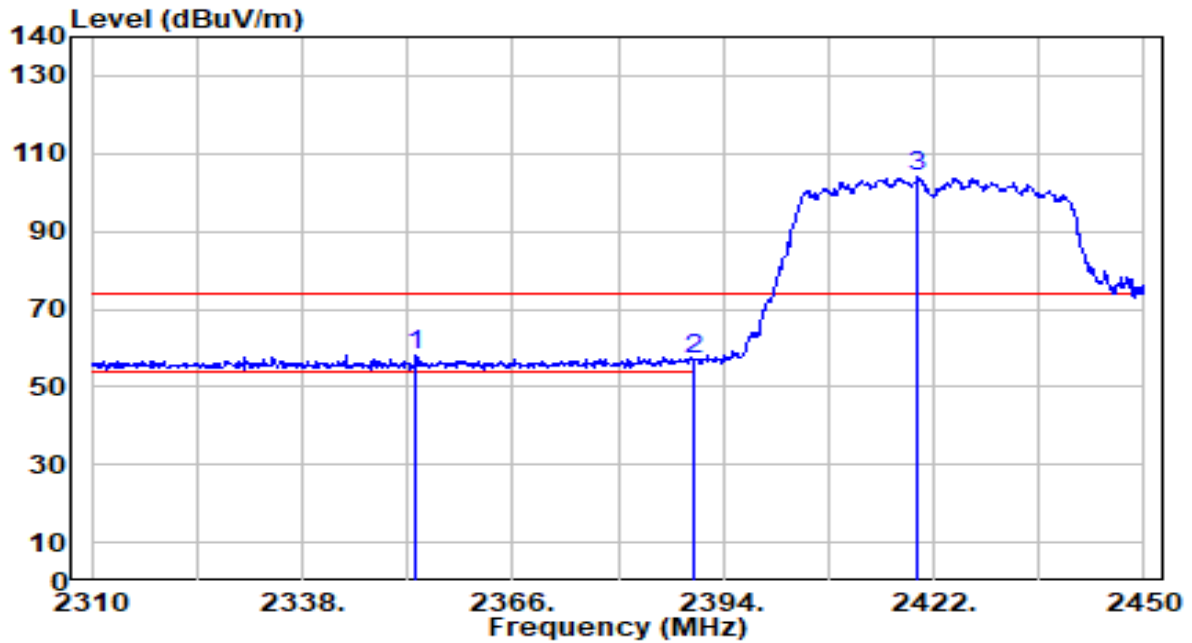


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2353.120	28.05	29.95	57.99	-16.01	74.00	175	152	Peak
2	2390.000	27.14	29.99	57.14	-16.86	74.00	175	152	Peak
3	2419.900	73.81	30.07	103.88	N/A	N/A	175	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

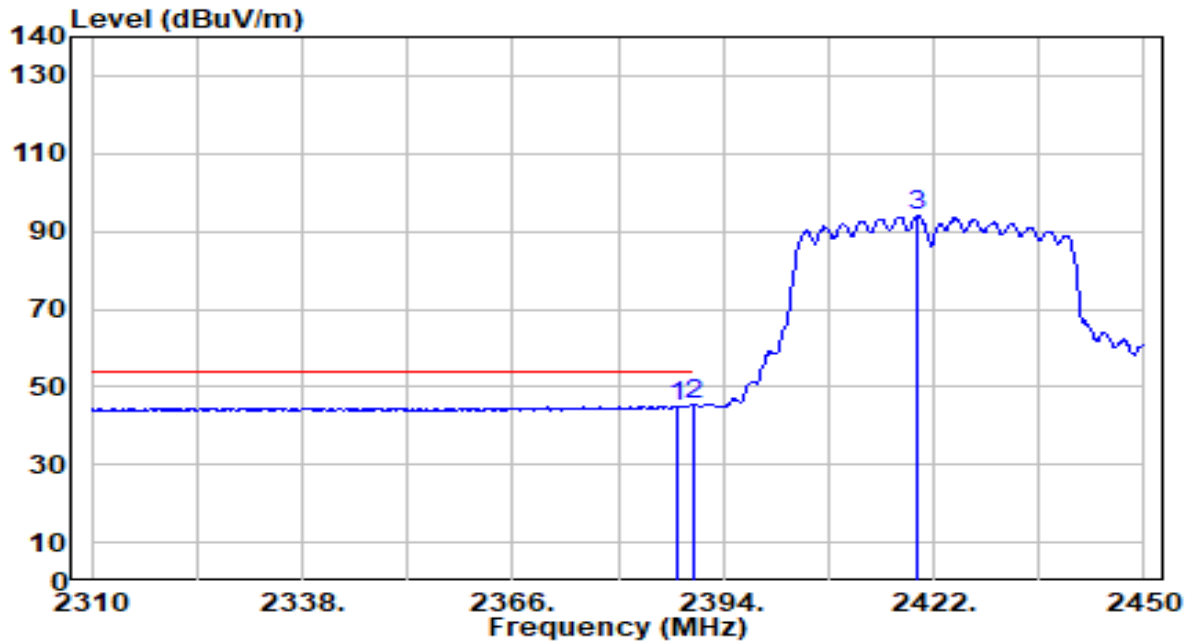


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.980	15.12	29.99	45.11	-8.89	54.00	175	152	Average
2	* 2390.000	15.29	29.99	45.29	-8.71	54.00	175	152	Average
3	2419.900	63.77	30.07	93.84	N/A	N/A	175	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

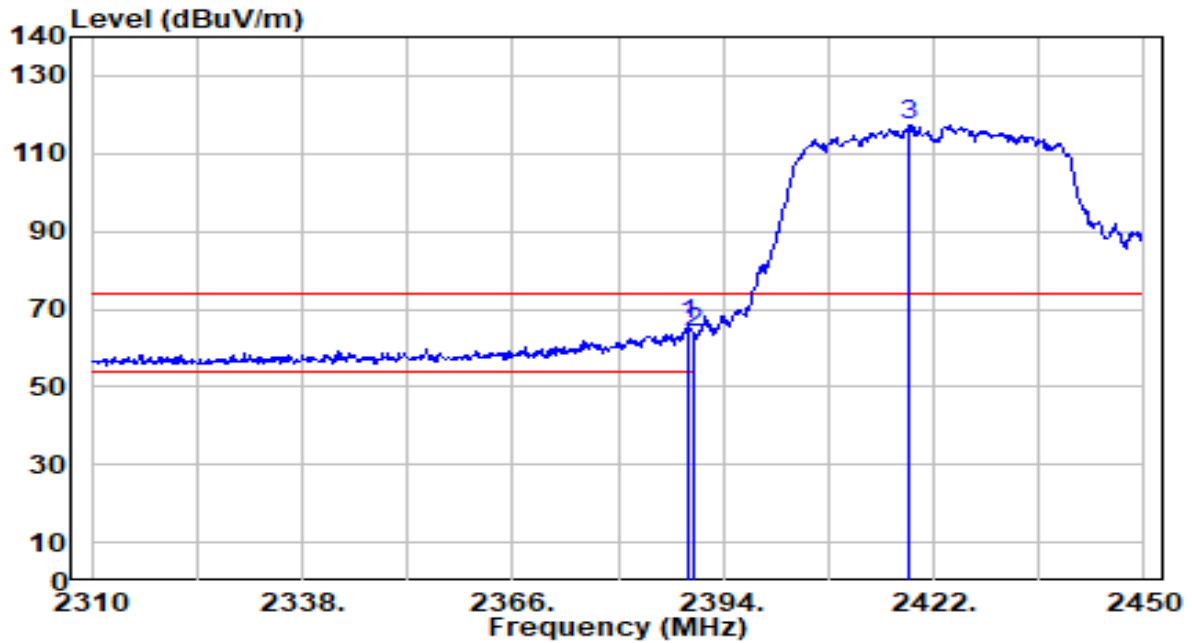


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.240	36.07	29.99	66.06	-7.94	74.00	200	184	Peak
2		2390.000	33.68	29.99	63.67	-10.33	74.00	200	184	Peak
3		2418.780	87.40	30.07	117.47	N/A	N/A	200	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

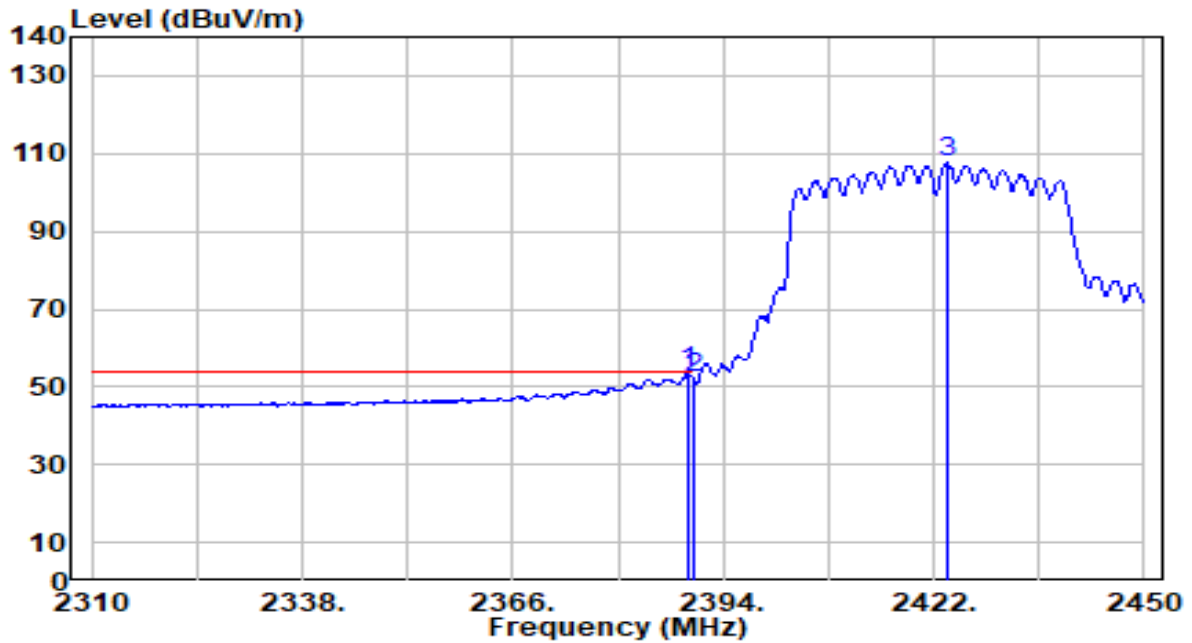


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.380	23.79	29.99	53.78	-0.22	54.00	200	184	Average
2		2390.000	22.56	29.99	52.55	-1.45	54.00	200	184	Average
3		2423.960	77.69	30.09	107.78	N/A	N/A	200	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

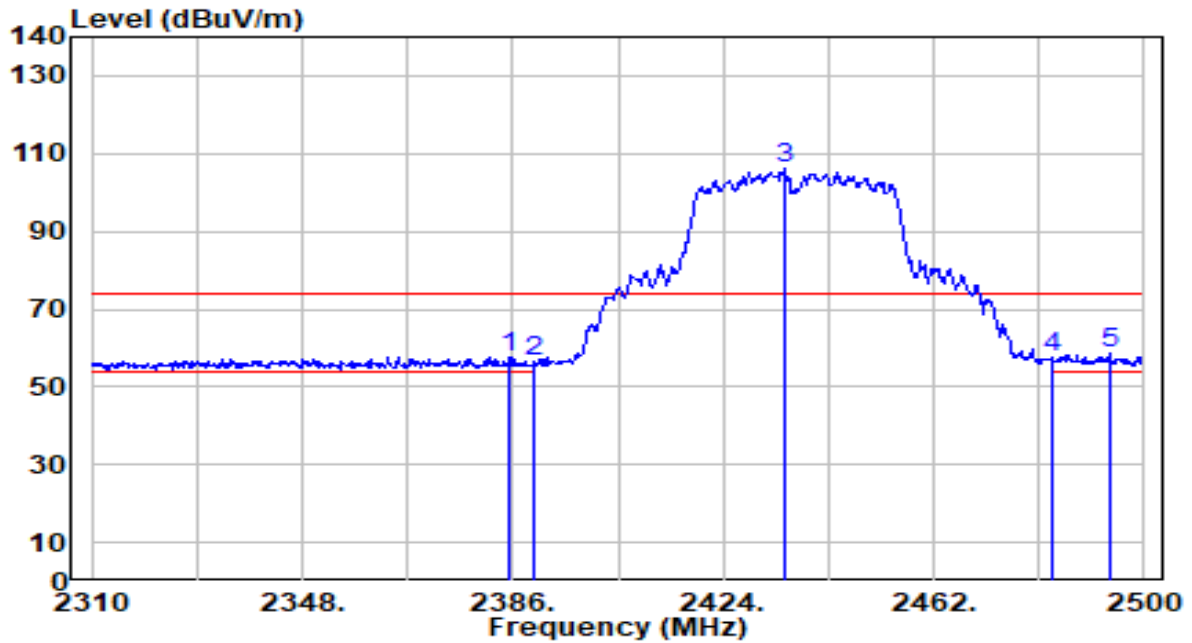


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	27.73	29.99	57.72	-16.28	74.00	150	194	Peak
2	2390.000	26.37	29.99	56.37	-17.63	74.00	150	194	Peak
3	2435.020	76.06	30.12	106.18	N/A	N/A	150	194	Peak
4	2483.500	27.29	30.29	57.57	-16.43	74.00	150	194	Peak
5	* 2493.730	28.33	30.32	58.65	-15.35	74.00	150	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

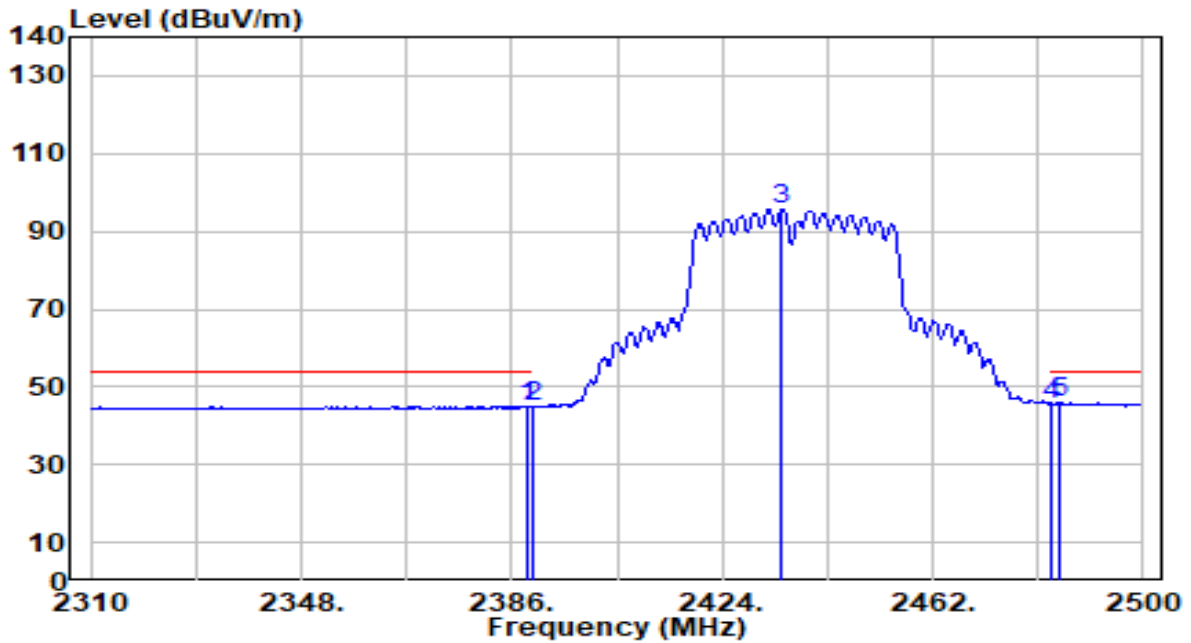


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	15.11	29.99	45.10	-8.90	54.00	150	194	Average
2	2390.000	14.91	29.99	44.90	-9.10	54.00	150	194	Average
3	2434.640	65.60	30.12	95.72	N/A	N/A	150	194	Average
4	2483.500	15.35	30.29	45.63	-8.37	54.00	150	194	Average
5	* 2484.800	15.64	30.29	45.93	-8.07	54.00	150	194	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

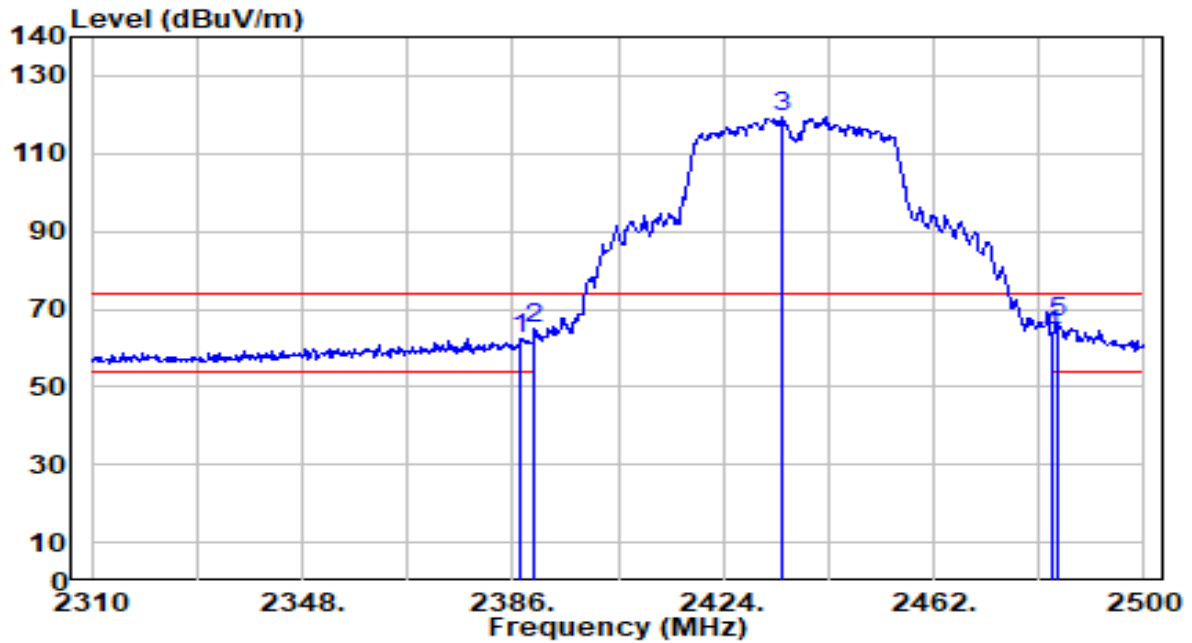


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	32.45	29.99	62.44	-11.56	74.00	192	5	Peak
2	2390.000	34.74	29.99	64.73	-9.27	74.00	192	5	Peak
3	2434.640	89.05	30.12	119.17	N/A	N/A	192	5	Peak
4	2483.500	33.23	30.29	63.52	-10.48	74.00	192	5	Peak
5	* 2484.610	36.46	30.29	66.75	-7.25	74.00	192	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

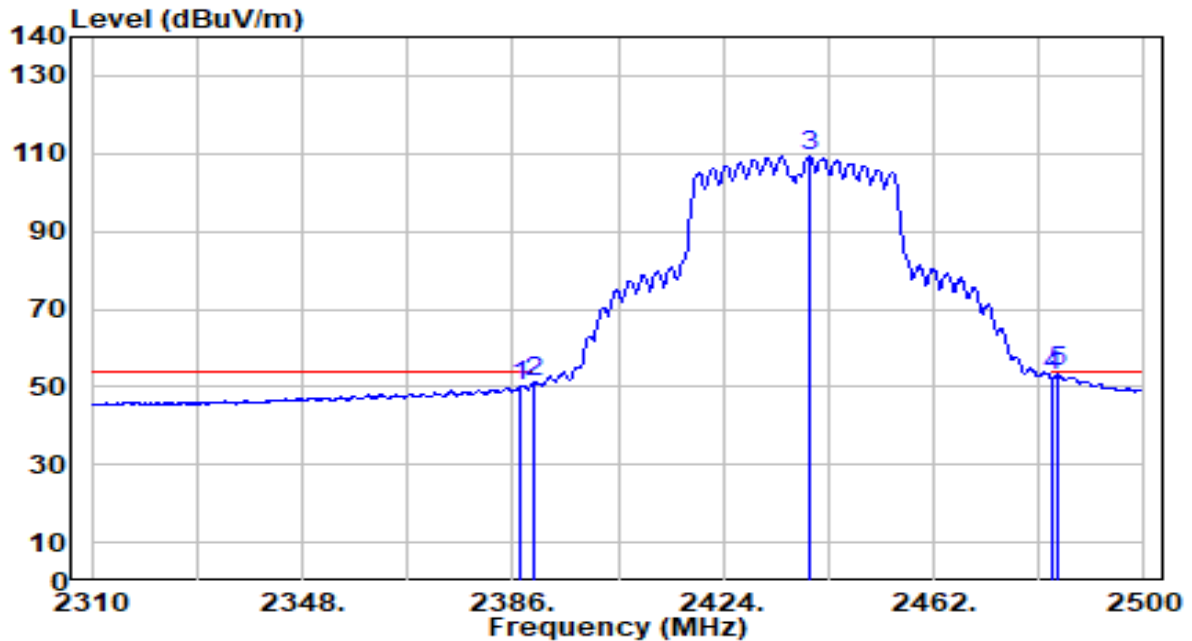


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	20.34	29.99	50.33	-3.67	54.00	192	5	Average
2	2390.000	21.19	29.99	51.18	-2.82	54.00	192	5	Average
3	2439.580	79.26	30.14	109.40	N/A	N/A	192	5	Average
4	2483.500	22.46	30.29	52.74	-1.26	54.00	192	5	Average
5	* 2484.420	23.44	30.29	53.73	-0.27	54.00	192	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-11
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

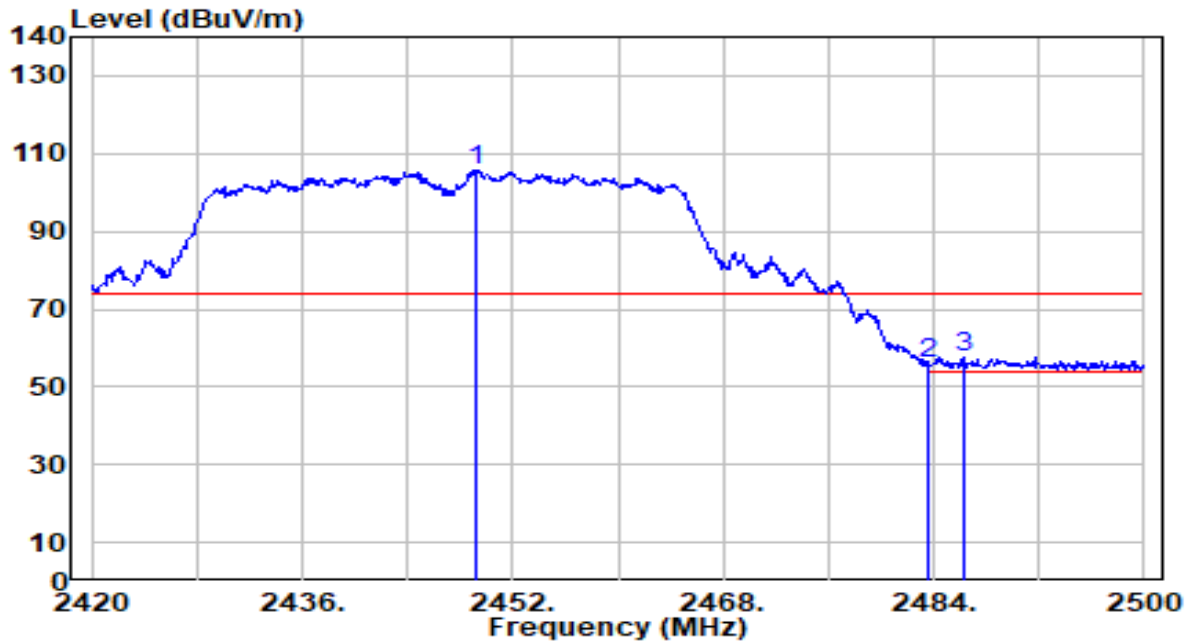


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.280	75.38	30.17	105.55	N/A	N/A	150	354	Peak
2	2483.500	25.64	30.29	55.93	-18.07	74.00	150	354	Peak
3	* 2486.320	27.54	30.29	57.83	-16.17	74.00	150	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-11
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

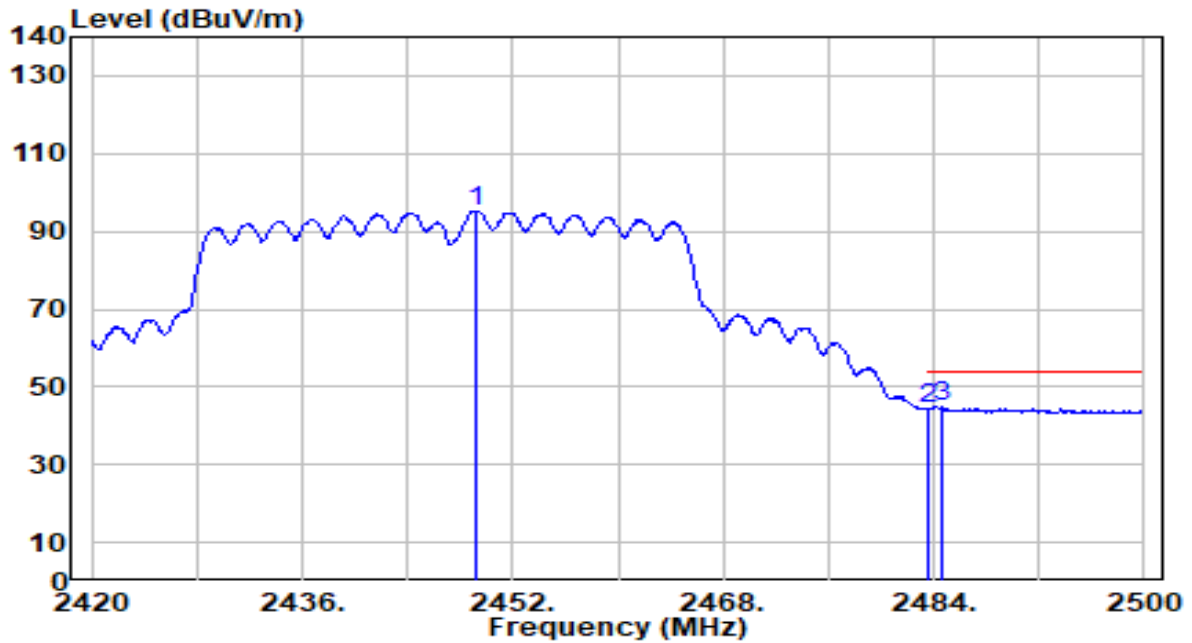


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.280	65.17	30.17	95.35	N/A	N/A	150	354	Average
2	2483.500	14.07	30.29	44.35	-9.65	54.00	150	354	Average
3	* 2484.720	14.54	30.29	44.83	-9.17	54.00	150	354	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-11
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

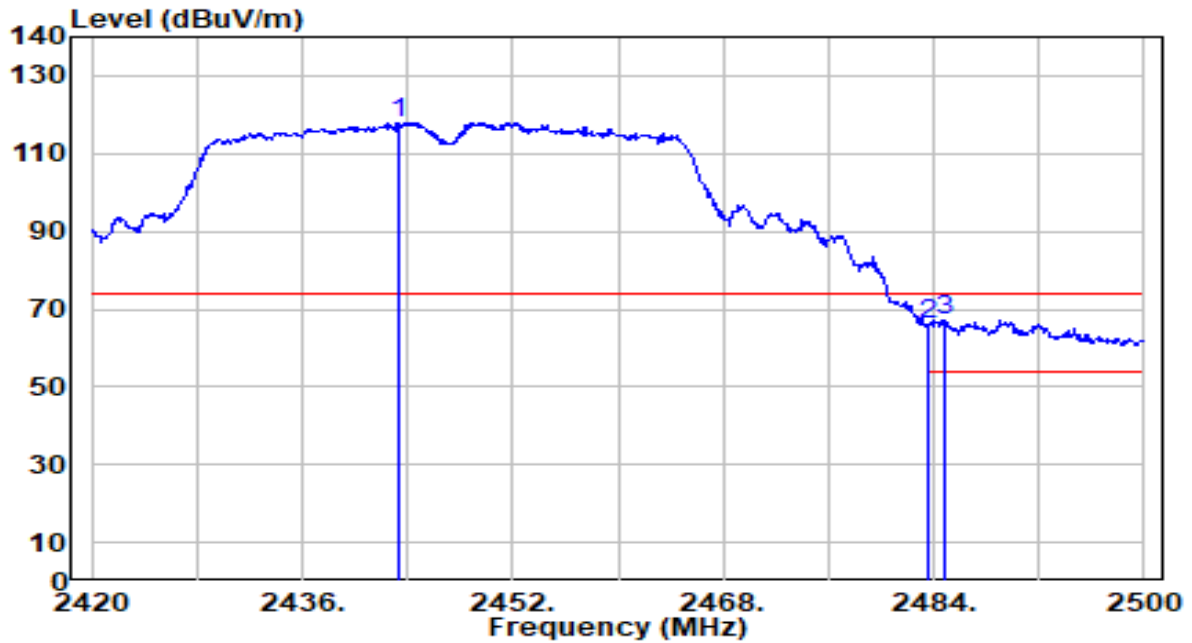


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.360	87.69	30.15	117.84	N/A	N/A	200	180	Peak
2	2483.500	35.55	30.29	65.84	-8.16	74.00	200	180	Peak
3	* 2484.800	37.02	30.29	67.31	-6.69	74.00	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-11
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

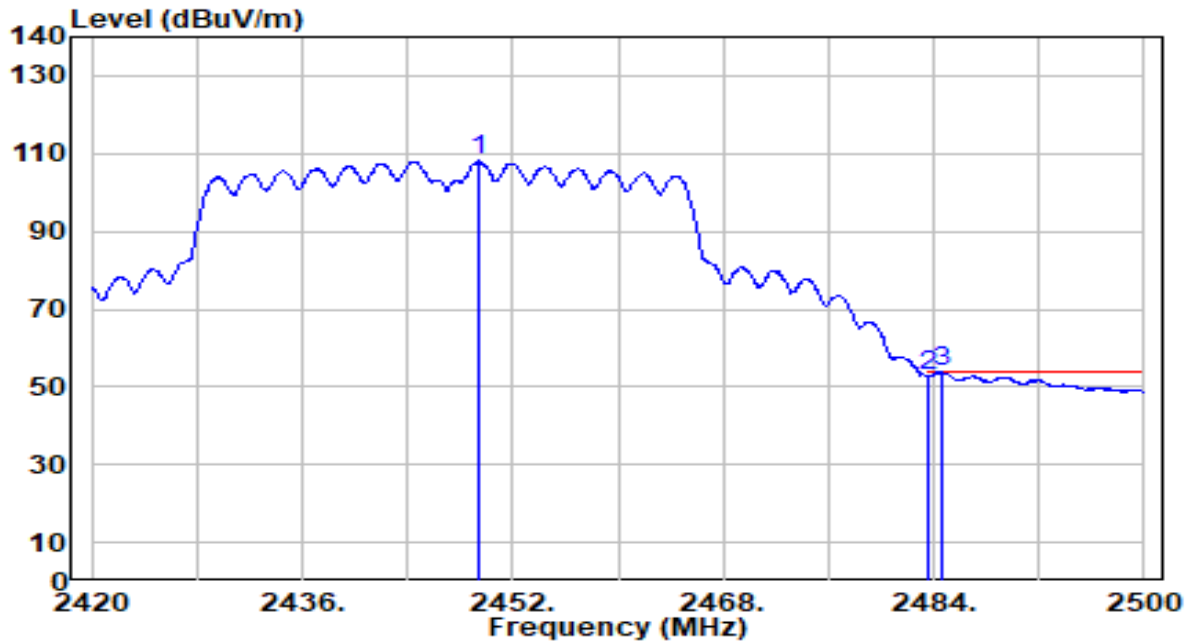


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.520	77.88	30.17	108.06	N/A	N/A	200	180	Average
2	2483.500	22.41	30.29	52.70	-1.30	54.00	200	180	Average
3	* 2484.560	23.52	30.29	53.81	-0.19	54.00	200	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

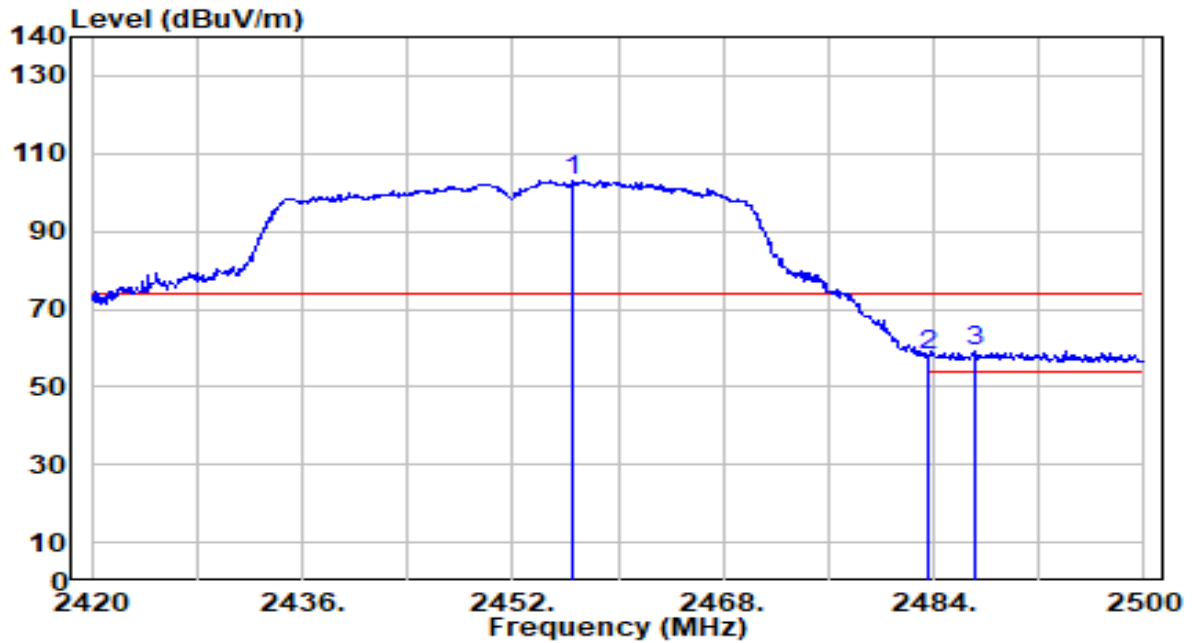


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.560	72.92	30.20	103.12	N/A	N/A	100	243	Peak
2	2483.500	27.77	30.29	58.05	-15.95	74.00	100	243	Peak
3	* 2487.120	29.07	30.30	59.37	-14.63	74.00	100	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

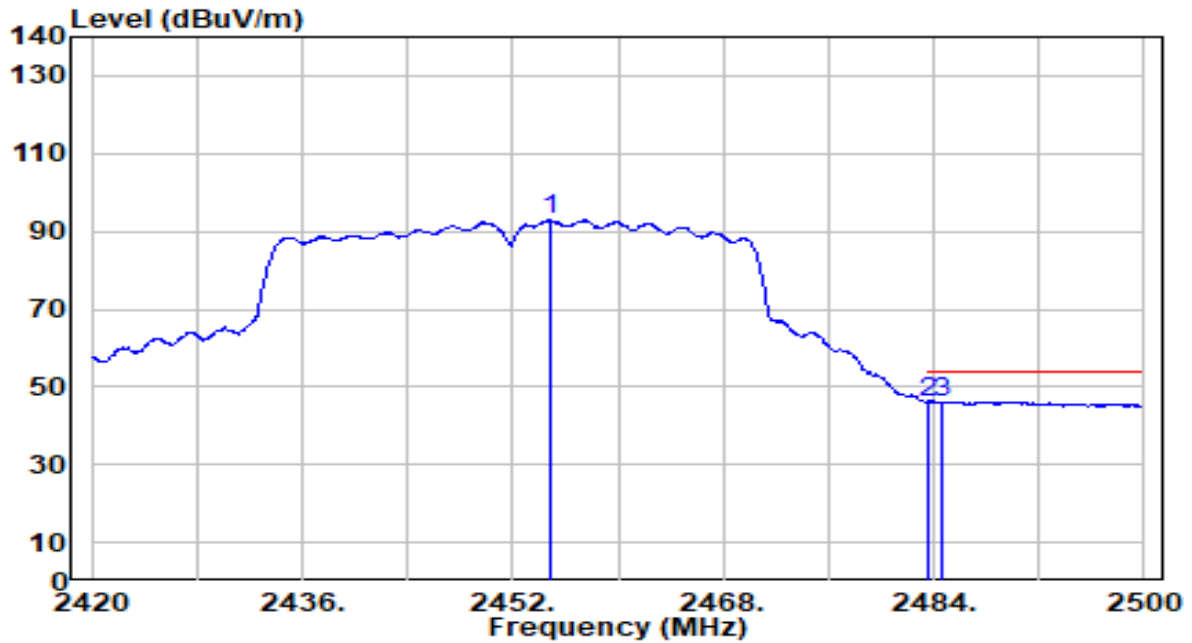


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.800	62.88	30.19	93.07	N/A	N/A	100	243	Average
2	2483.500	15.69	30.29	45.98	-8.02	54.00	100	243	Average
3	* 2484.640	15.89	30.29	46.17	-7.83	54.00	100	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

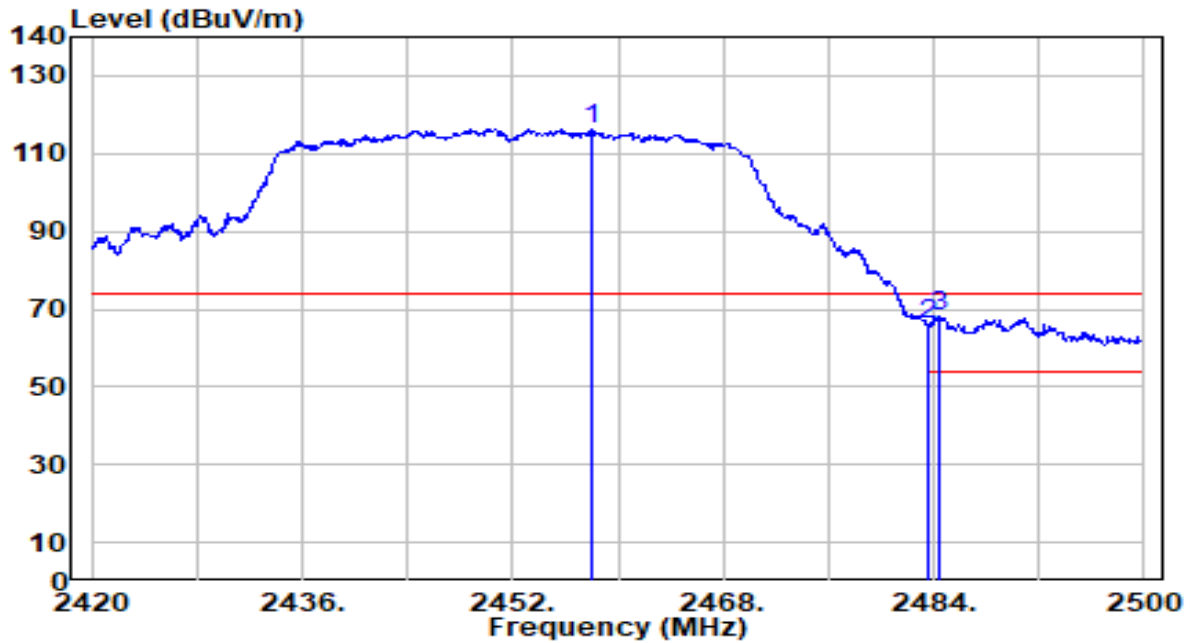


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.920	86.15	30.20	116.35	N/A	N/A	176	5	Peak
2	2483.500	35.90	30.29	66.19	-7.81	74.00	176	5	Peak
3	* 2484.480	38.01	30.29	68.30	-5.70	74.00	176	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

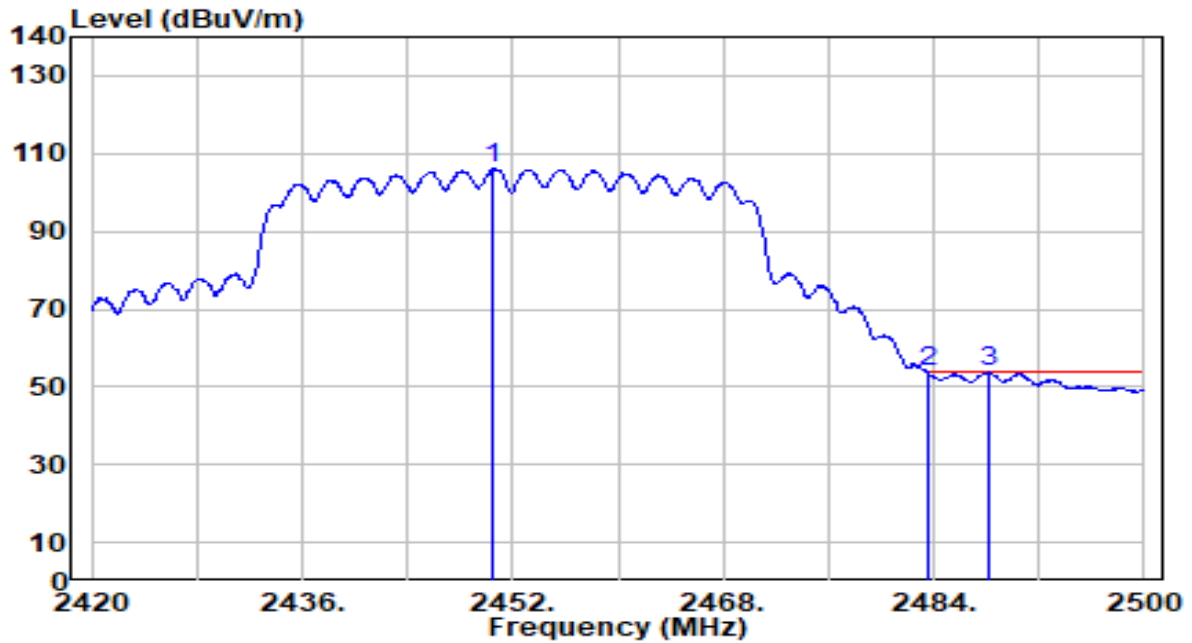


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.480	75.77	30.18	105.94	N/A	N/A	176	5	Average
2	* 2483.500	23.50	30.29	53.78	-0.22	54.00	176	5	Average
3	2488.160	23.35	30.30	53.65	-0.35	54.00	176	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

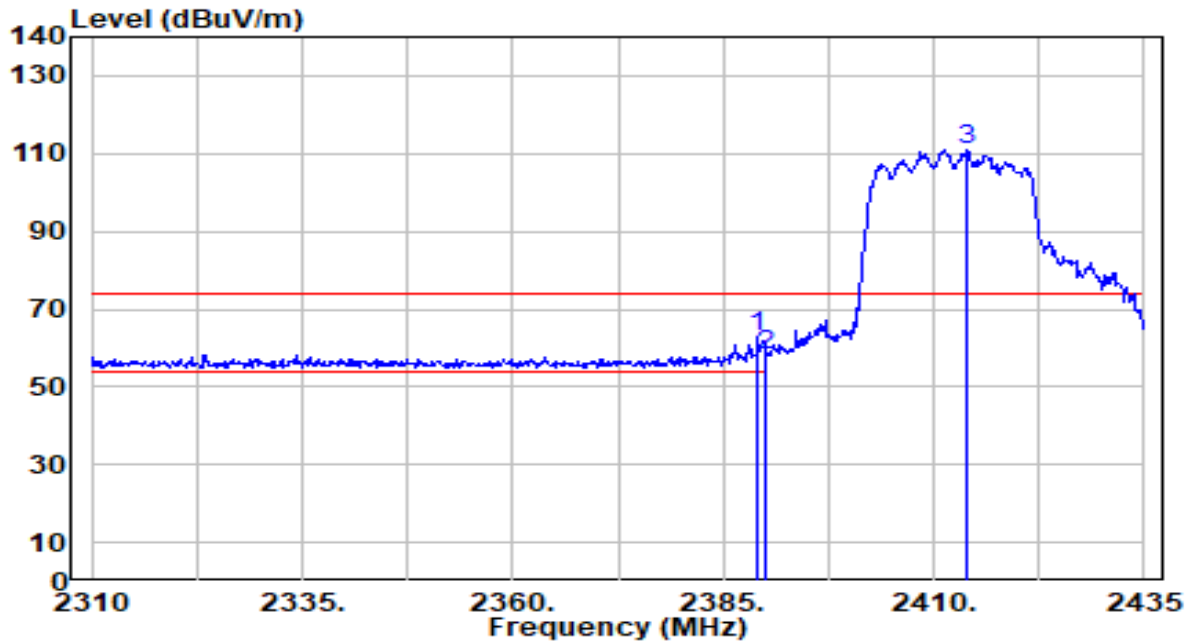


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.000	32.85	29.99	62.84	-11.16	74.00	175	152	Peak
2		2390.000	28.36	29.99	58.35	-15.65	74.00	175	152	Peak
3		2413.875	81.04	30.05	111.09	N/A	N/A	175	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

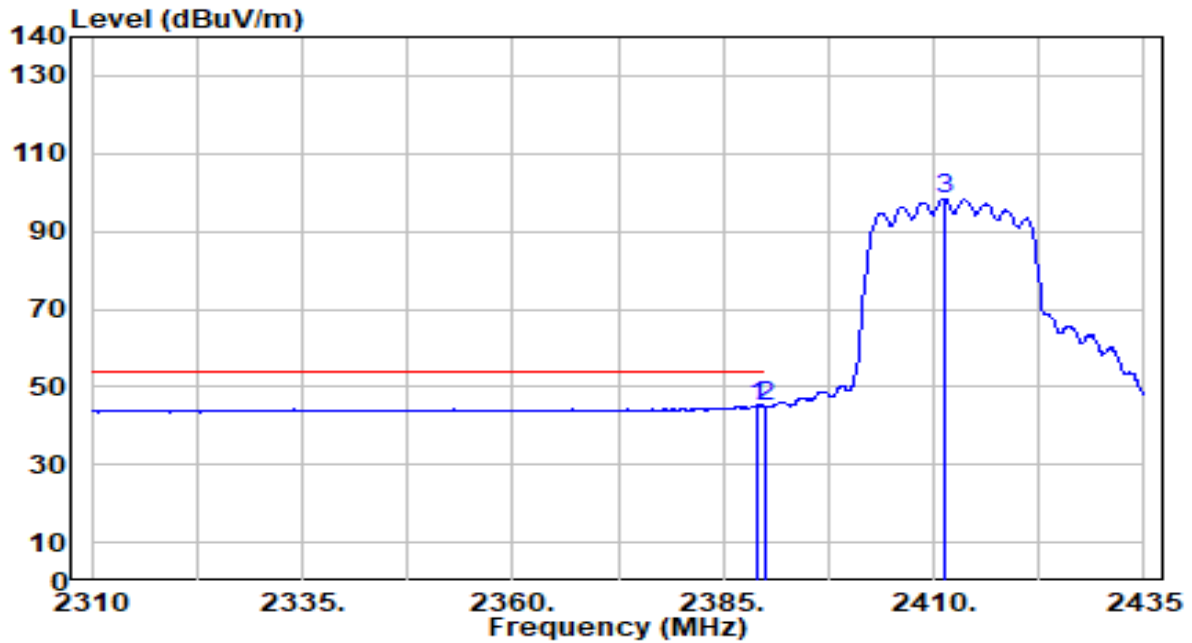


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.000	15.07	29.99	45.07	-8.93	54.00	175	152	Average
2		2390.000	15.02	29.99	45.02	-8.98	54.00	175	152	Average
3		2411.250	68.42	30.05	98.47	N/A	N/A	175	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

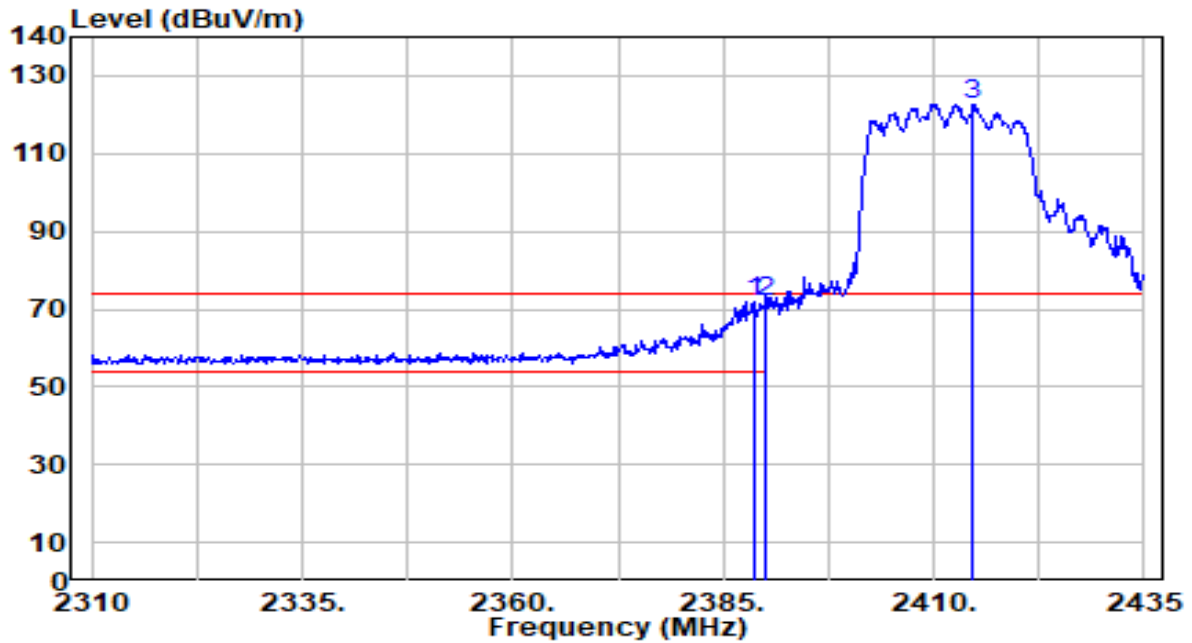


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.625	41.95	29.99	71.94	-2.06	74.00	241	184	Peak
2		2390.000	41.64	29.99	71.63	-2.37	74.00	241	184	Peak
3		2414.625	92.68	30.06	122.74	N/A	N/A	241	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

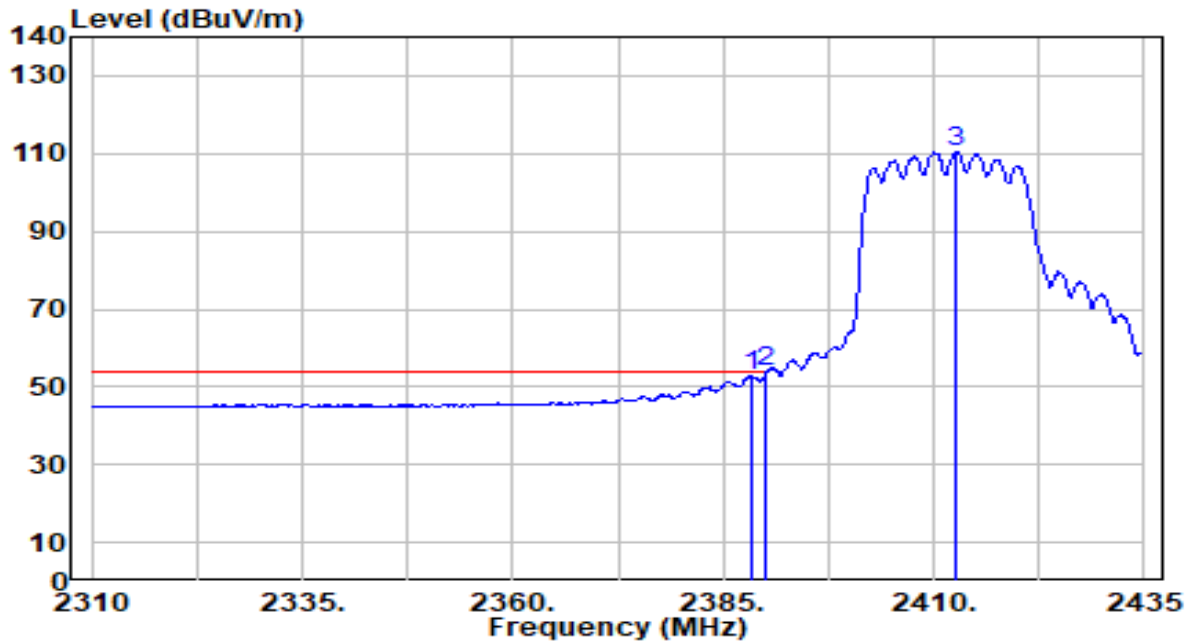


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.375	22.95	29.99	52.95	-1.05	54.00	241	184	Average
2	* 2390.000	23.73	29.99	53.72	-0.28	54.00	241	184	Average
3	2412.625	80.49	30.05	110.54	N/A	N/A	241	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

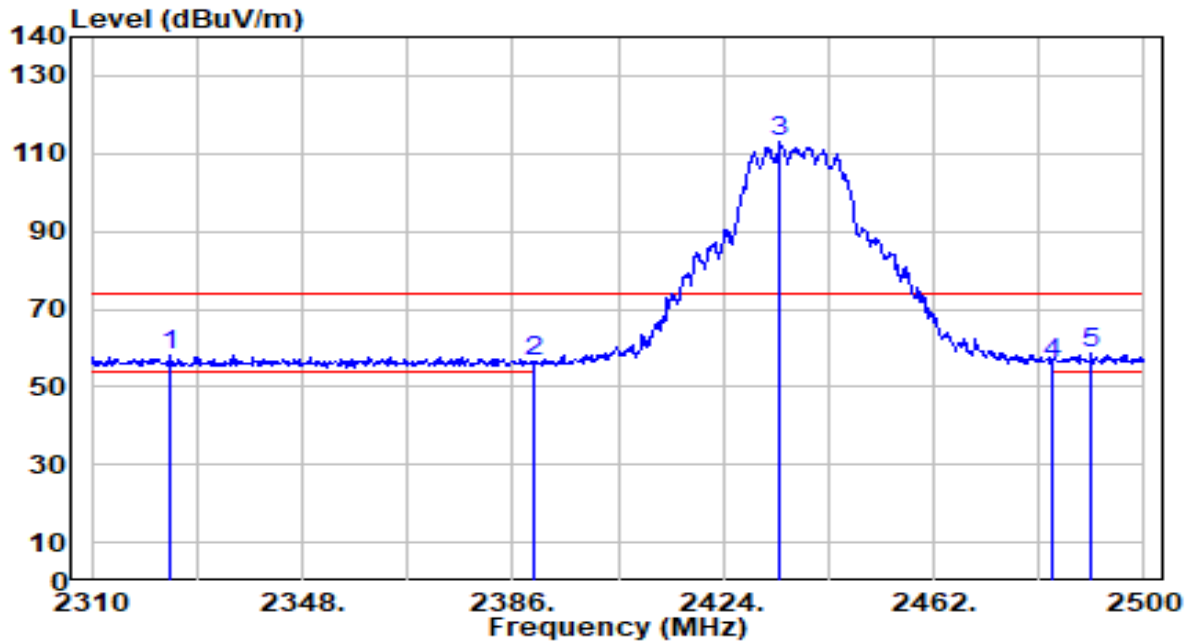


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2324.250	28.10	29.91	58.01	-15.99	74.00	150	189	Peak
2	2390.000	26.60	29.99	56.59	-17.41	74.00	150	189	Peak
3	2434.260	83.10	30.12	113.22	N/A	N/A	150	189	Peak
4	2483.500	25.88	30.29	56.16	-17.84	74.00	150	189	Peak
5	* 2490.310	28.18	30.31	58.49	-15.51	74.00	150	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

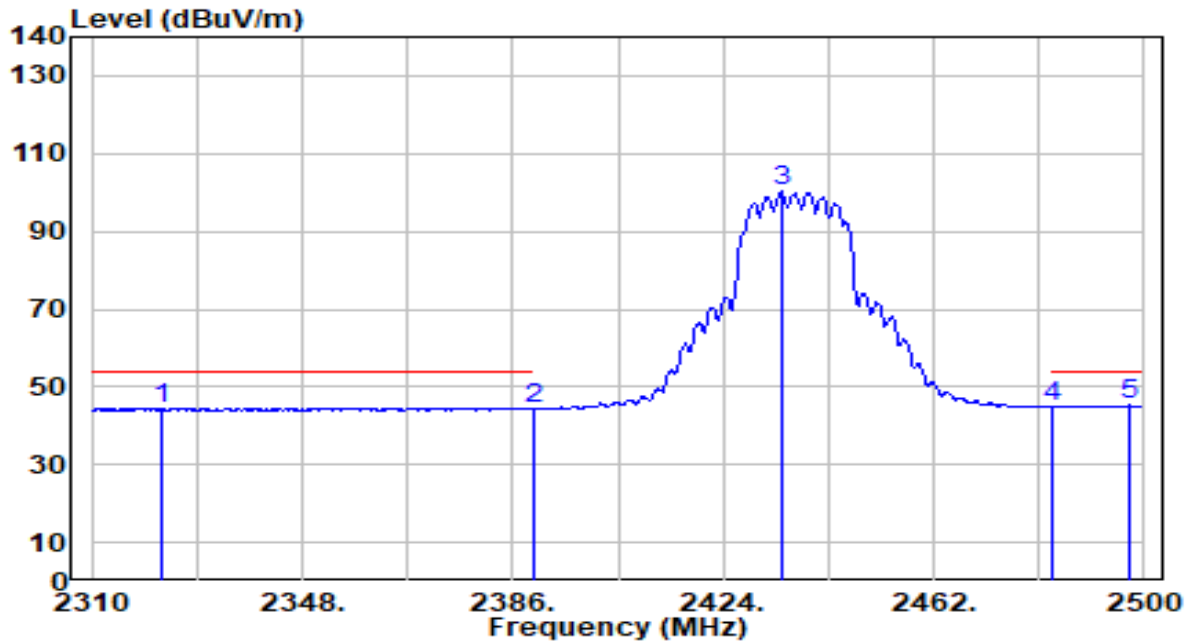


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2322.540	14.60	29.91	44.51	-9.49	54.00	150	189	Average
2	2390.000	14.46	29.99	44.46	-9.54	54.00	150	189	Average
3	2434.450	70.10	30.12	100.23	N/A	N/A	150	189	Average
4	2483.500	14.47	30.29	44.75	-9.25	54.00	150	189	Average
5	* 2497.530	14.88	30.33	45.21	-8.79	54.00	150	189	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

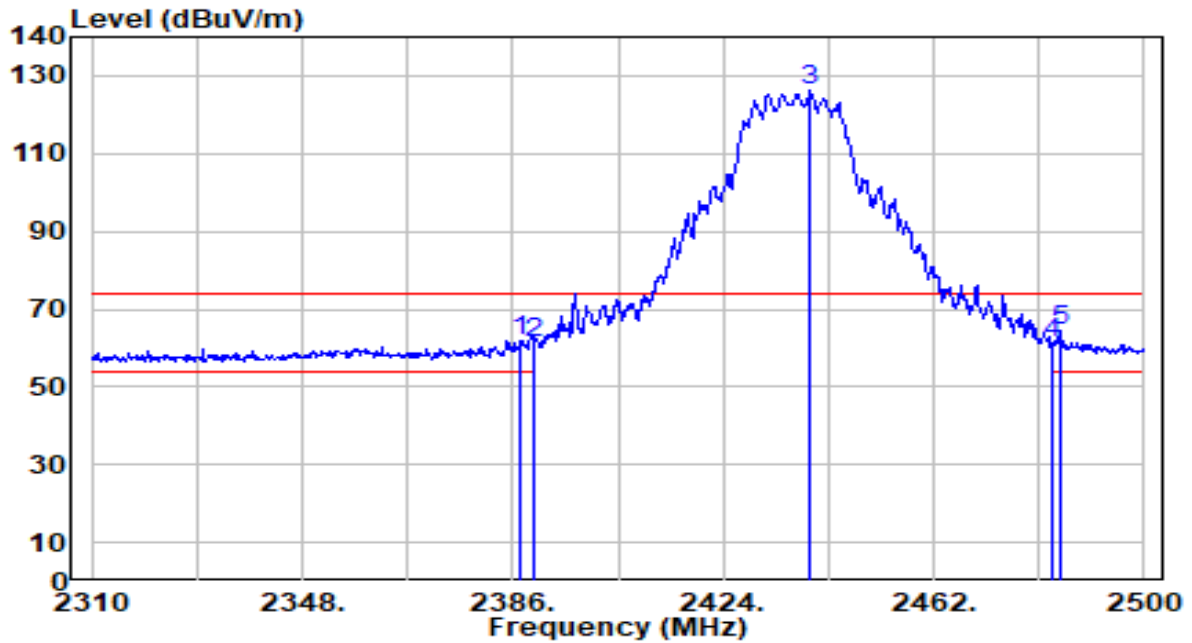


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	31.99	29.99	61.98	-12.02	74.00	192	2	Peak
2	2390.000	31.28	29.99	61.27	-12.73	74.00	192	2	Peak
3	2439.770	96.22	30.14	126.36	N/A	N/A	192	2	Peak
4	2483.500	30.99	30.29	61.28	-12.72	74.00	192	2	Peak
5	* 2484.800	34.41	30.29	64.69	-9.31	74.00	192	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

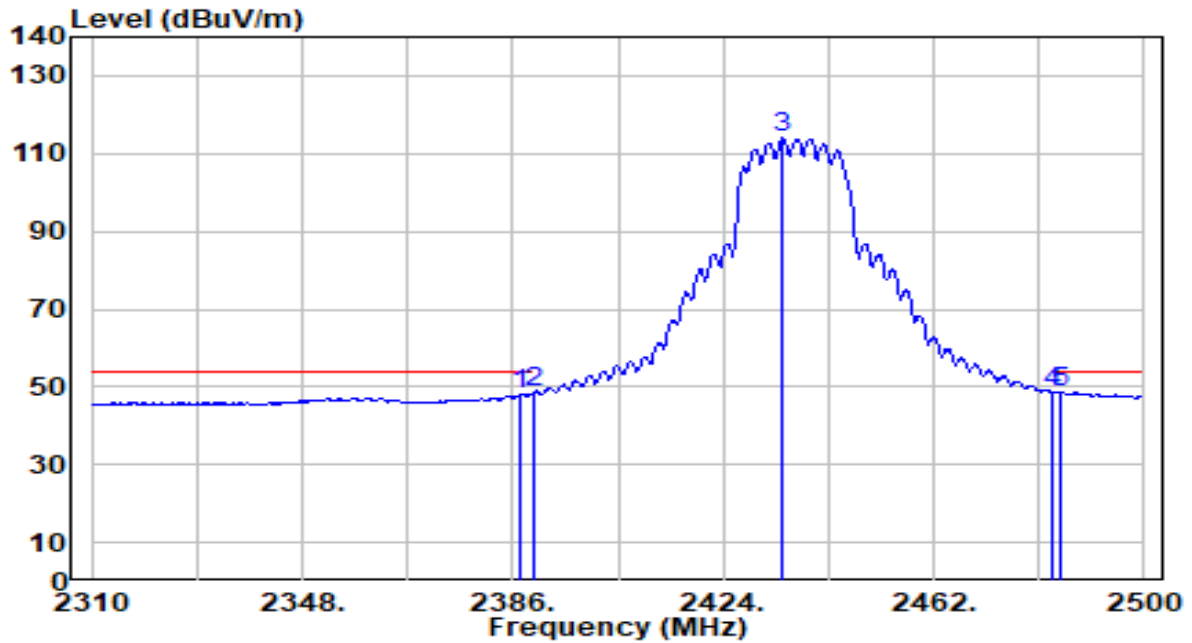


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	18.11	29.99	48.10	-5.90	54.00	192	2	Average
2	* 2390.000	18.77	29.99	48.77	-5.23	54.00	192	2	Average
3	2434.830	83.84	30.12	113.96	N/A	N/A	192	2	Average
4	2483.500	18.20	30.29	48.48	-5.52	54.00	192	2	Average
5	2484.800	18.33	30.29	48.62	-5.38	54.00	192	2	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

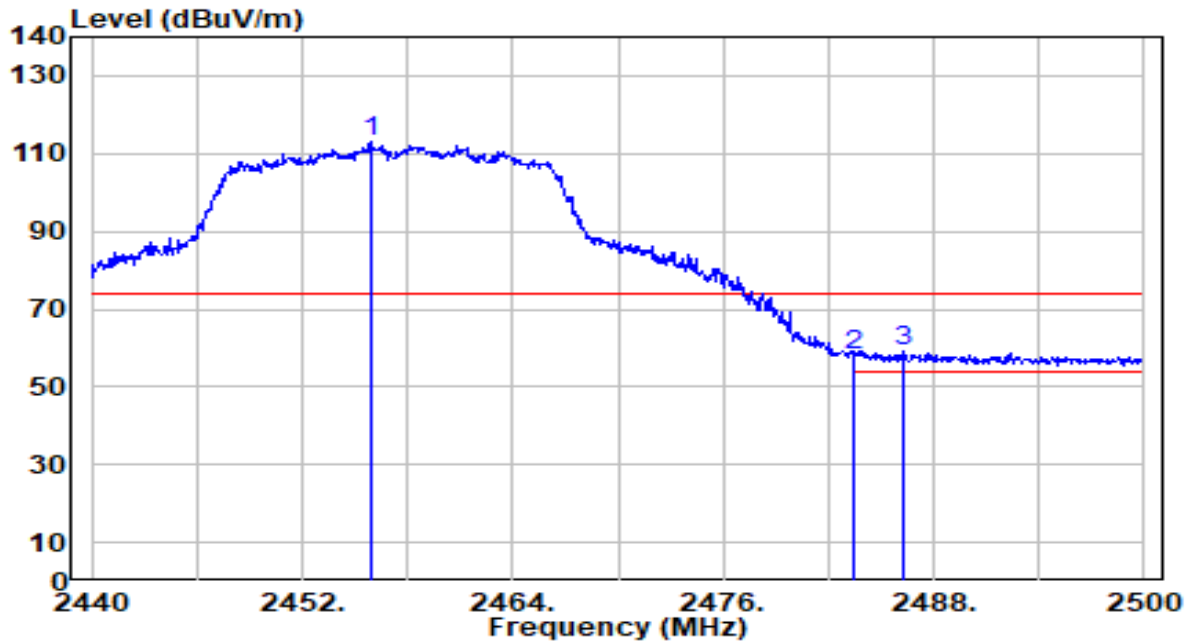


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.960	82.94	30.19	113.13	N/A	N/A	100	242	Peak
2	2483.500	27.69	30.29	57.97	-16.03	74.00	100	242	Peak
3	* 2486.200	28.66	30.29	58.95	-15.05	74.00	100	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

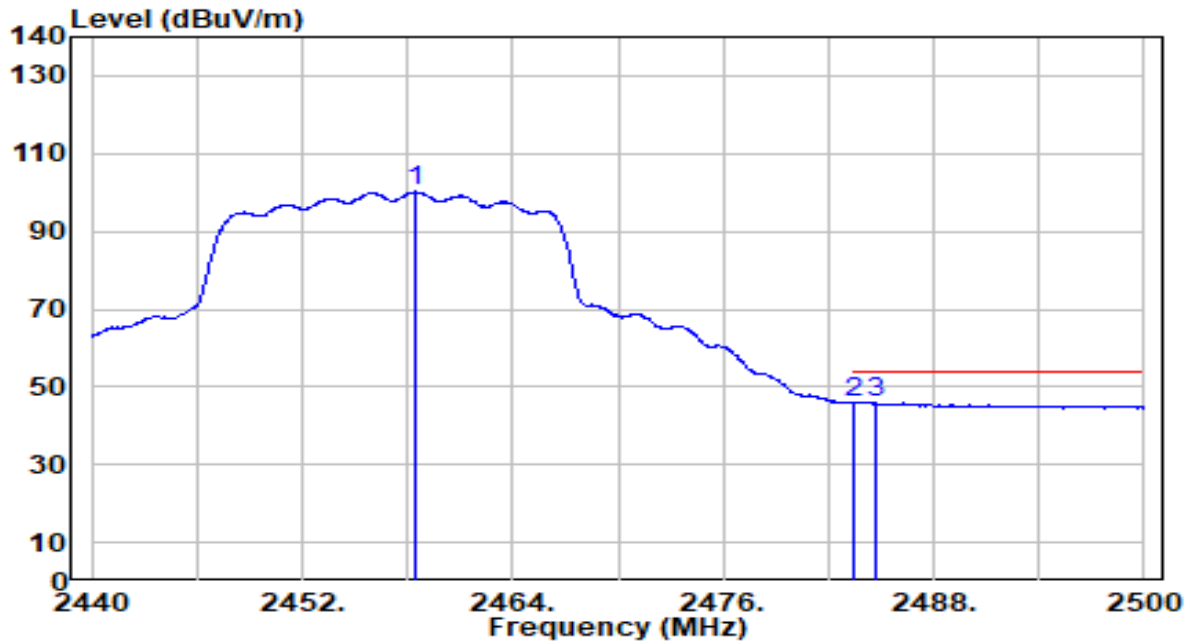


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.420	69.94	30.20	100.14	N/A	N/A	100	242	Average
2	* 2483.500	15.69	30.29	45.98	-8.02	54.00	100	242	Average
3	2484.640	15.50	30.29	45.79	-8.21	54.00	100	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

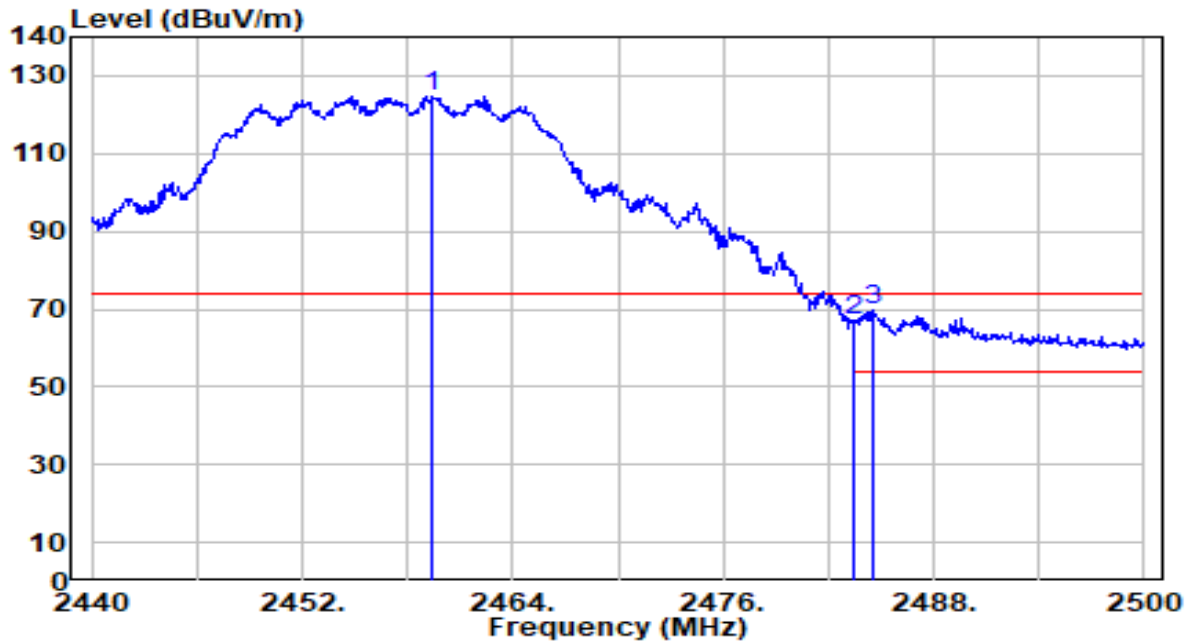


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.320	94.57	30.20	124.78	N/A	N/A	176	3	Peak
2	2483.500	36.83	30.29	67.11	-6.89	74.00	176	3	Peak
3	* 2484.580	39.65	30.29	69.94	-4.06	74.00	176	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

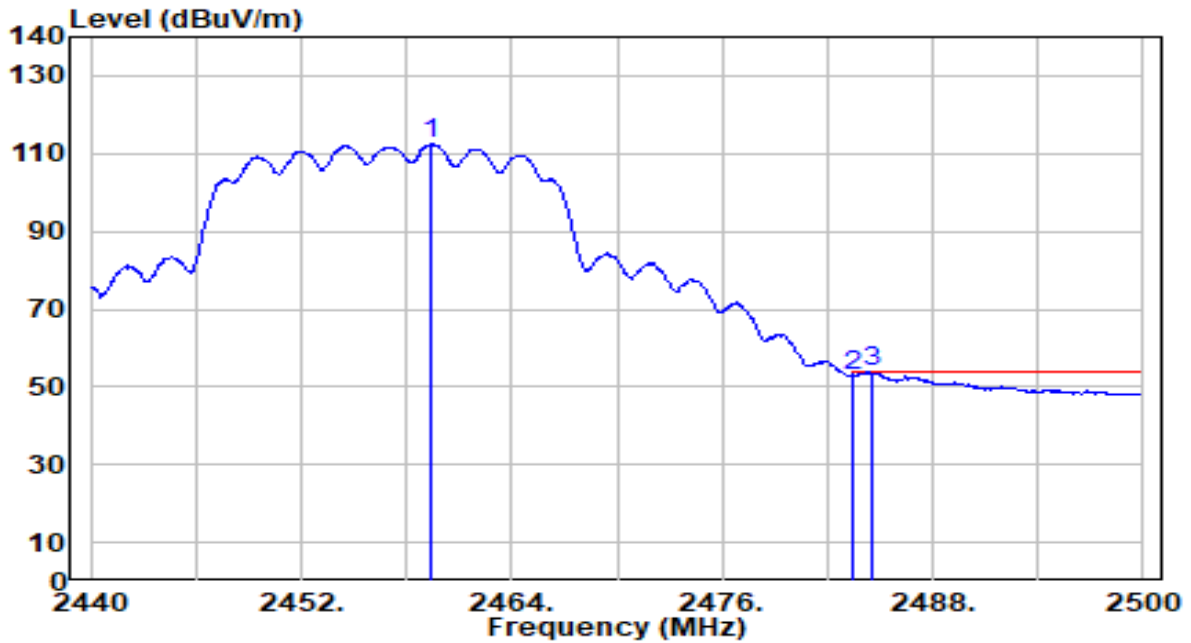


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.320	82.20	30.20	112.41	N/A	N/A	176	3	Average
2	2483.500	22.67	30.29	52.96	-1.04	54.00	176	3	Average
3	* 2484.520	23.52	30.29	53.80	-0.20	54.00	176	3	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

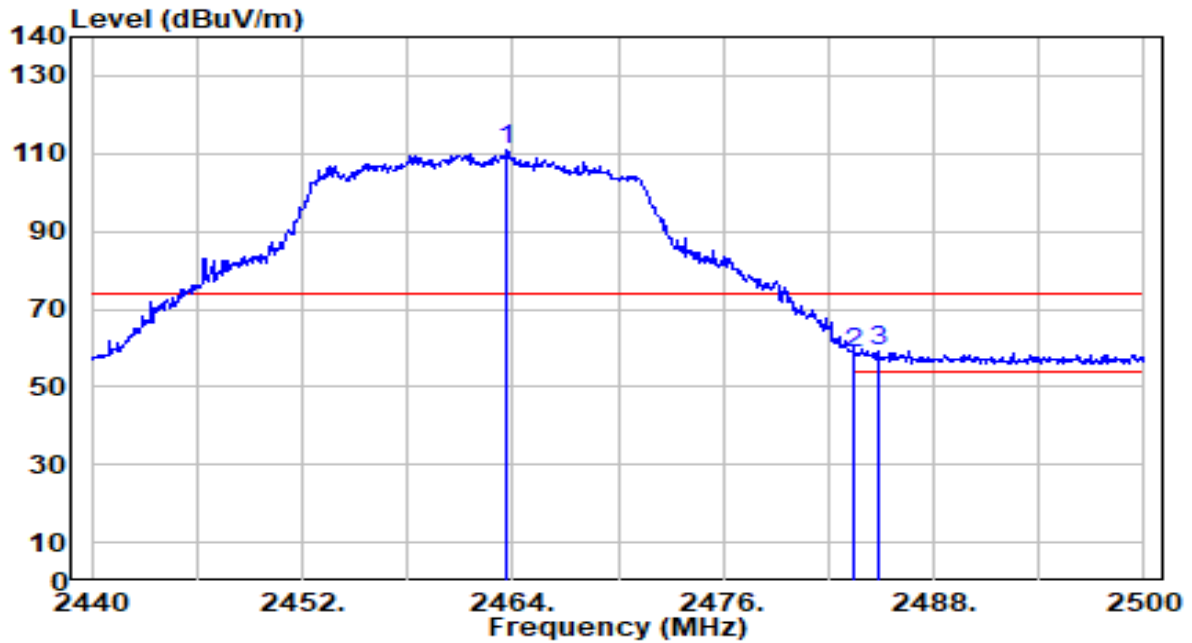


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.700	80.49	30.22	110.71	N/A	N/A	100	242	Peak
2	2483.500	28.42	30.29	58.70	-15.30	74.00	100	242	Peak
3	* 2484.820	28.77	30.29	59.06	-14.94	74.00	100	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

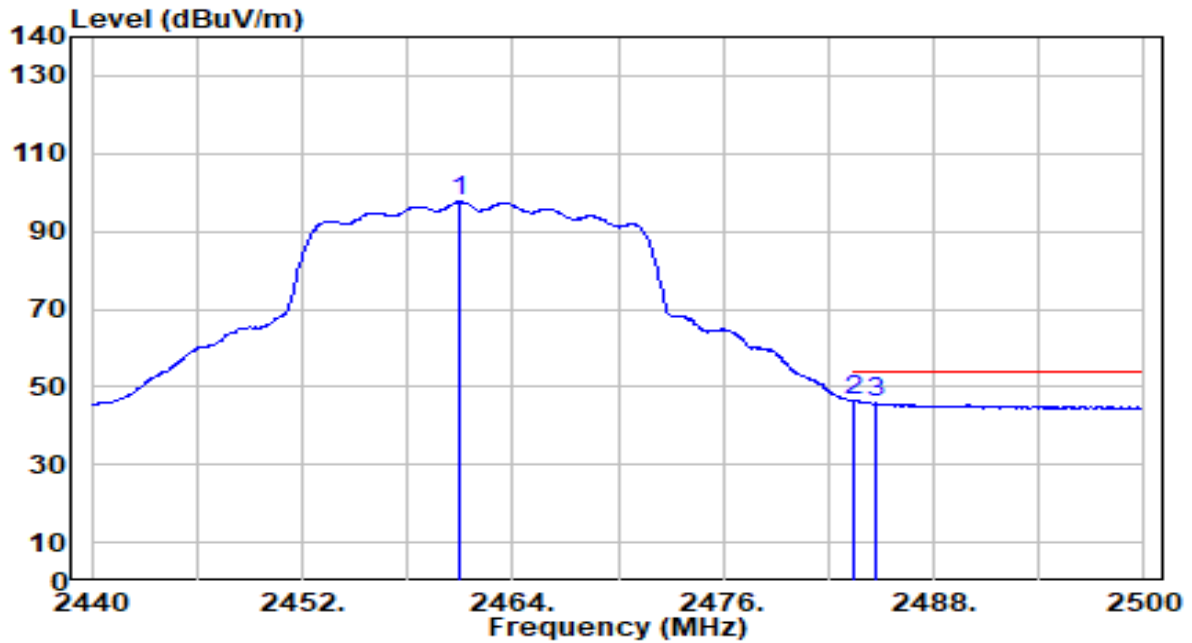


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.000	67.47	30.21	97.68	N/A	N/A	100	242	Average
2	* 2483.500	16.17	30.29	46.46	-7.54	54.00	100	242	Average
3	2484.760	15.44	30.29	45.73	-8.27	54.00	100	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

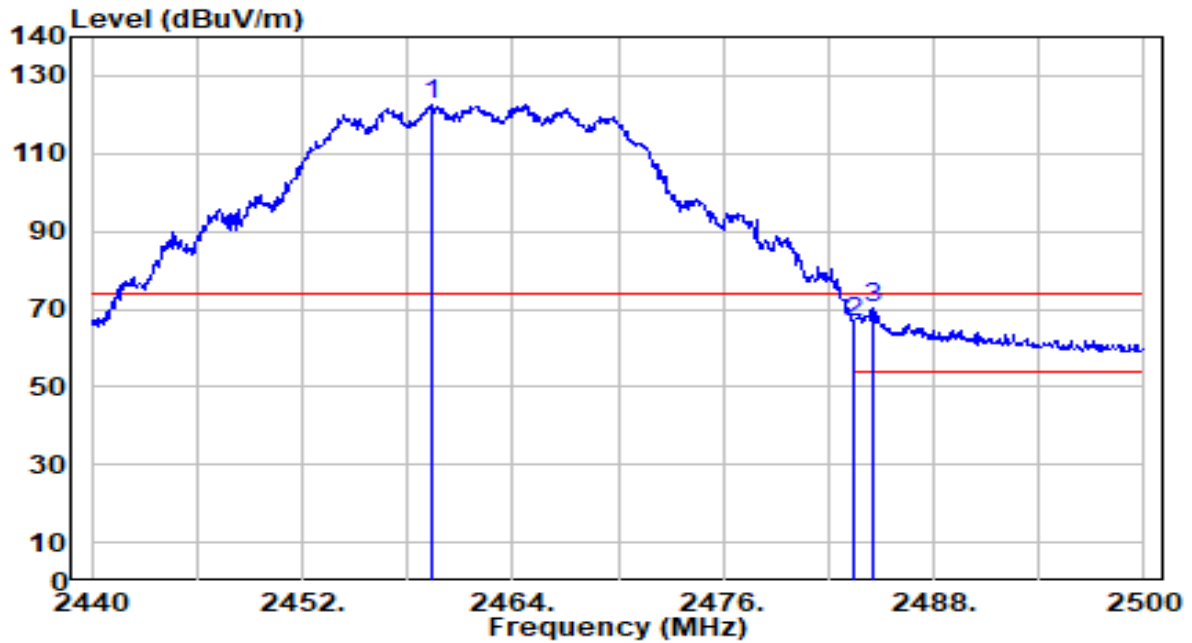


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.380	92.30	30.21	122.50	N/A	N/A	176	4	Peak
2	2483.500	36.51	30.29	66.79	-7.21	74.00	176	4	Peak
3	* 2484.580	39.82	30.29	70.11	-3.89	74.00	176	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

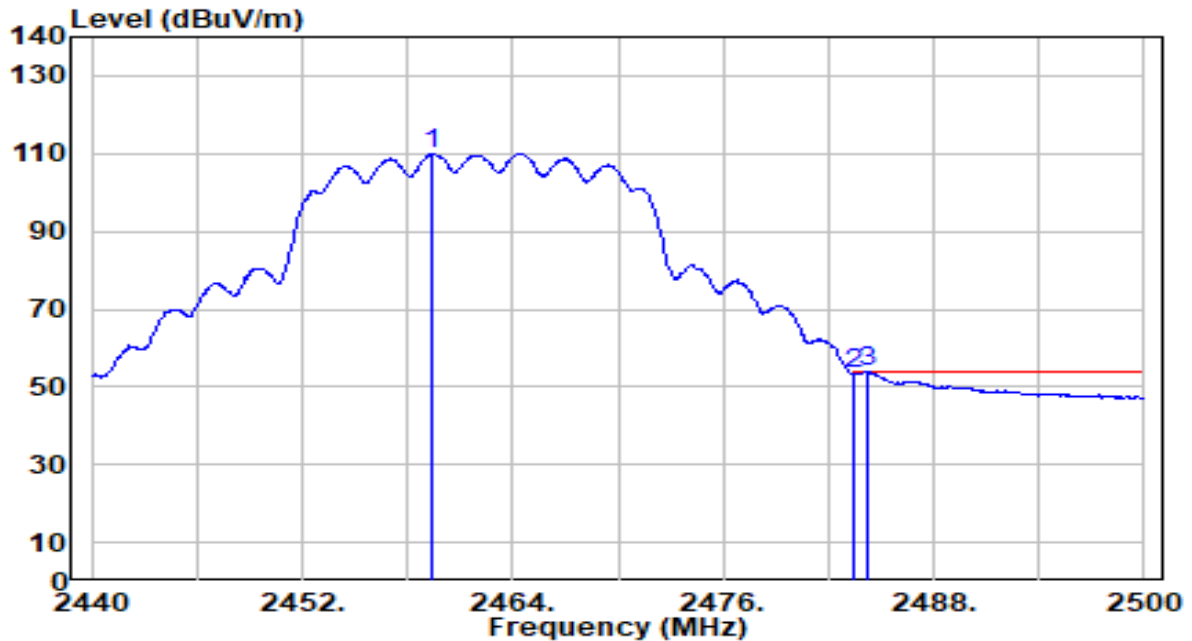


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.440	79.67	30.21	109.88	N/A	N/A	176	4	Average
2	2483.500	22.96	30.29	53.24	-0.76	54.00	176	4	Average
3	* 2484.160	23.53	30.29	53.81	-0.19	54.00	176	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

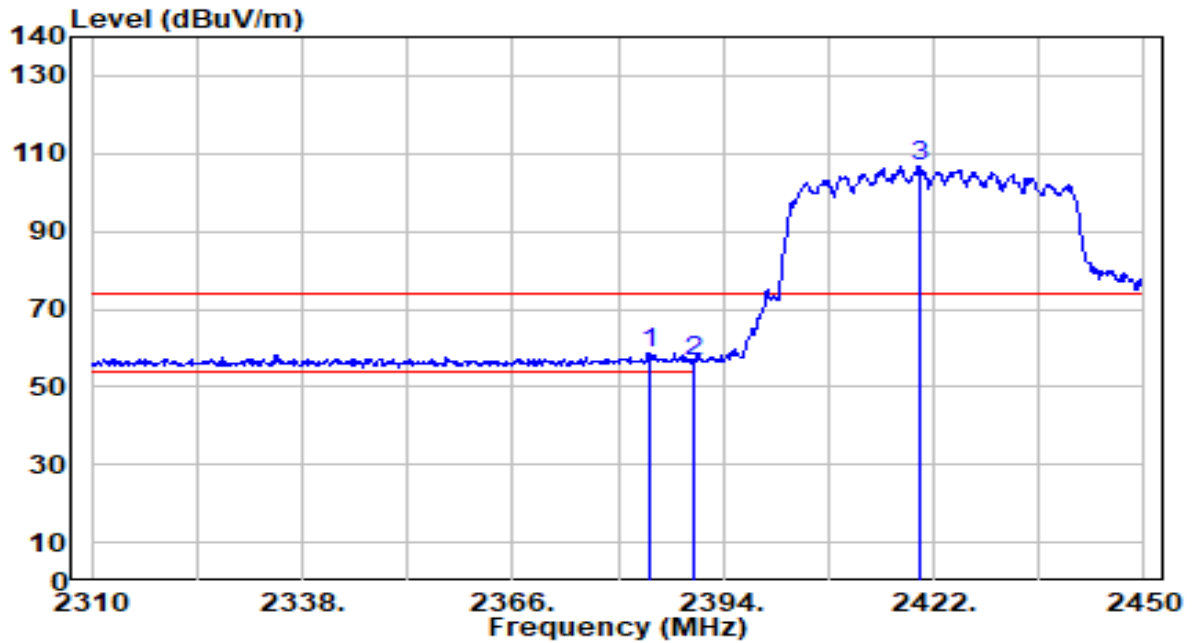


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2384.060	28.68	29.99	58.67	-15.33	74.00	175	152	Peak
2		2390.000	26.55	29.99	56.54	-17.46	74.00	175	152	Peak
3		2420.320	76.70	30.08	106.78	N/A	N/A	175	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

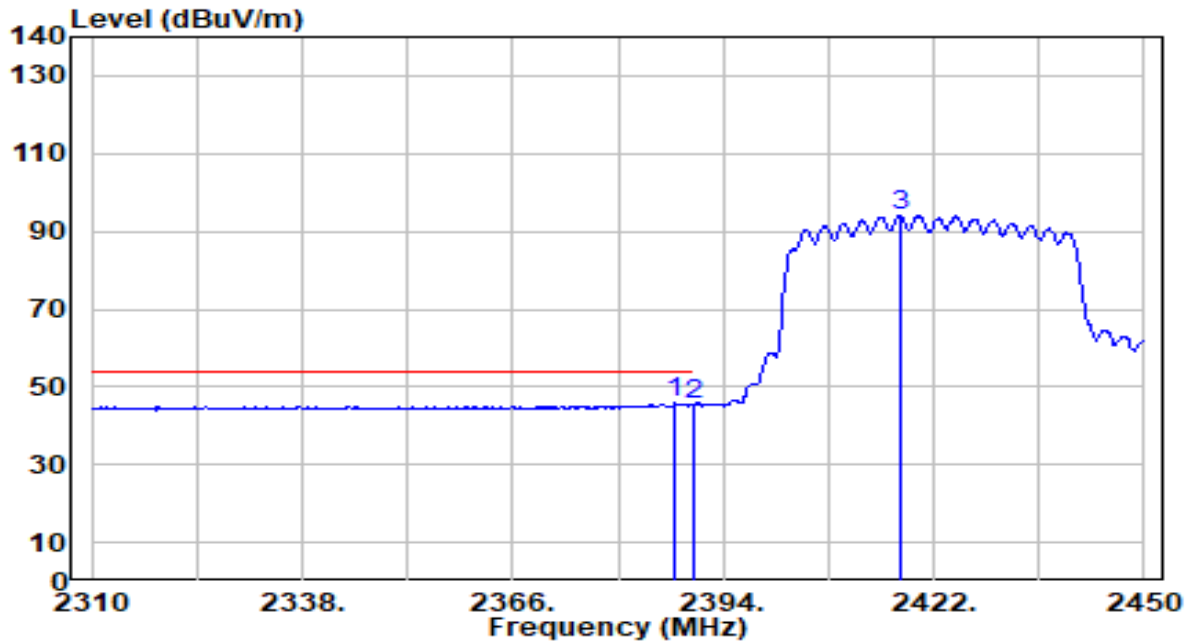


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.700	15.72	29.99	45.71	-8.29	54.00	175	152	Average
2		2390.000	15.60	29.99	45.59	-8.41	54.00	175	152	Average
3		2417.660	63.95	30.07	94.02	N/A	N/A	175	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

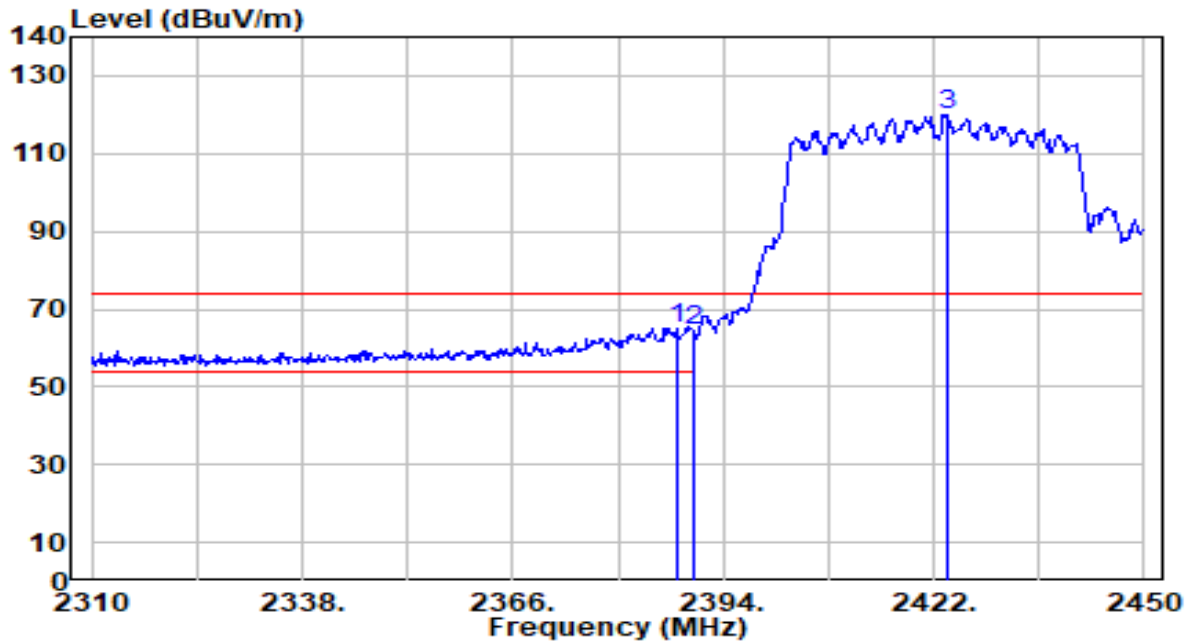


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.840	35.13	29.99	65.12	-8.88	74.00	200	184	Peak
2		2390.000	34.31	29.99	64.30	-9.70	74.00	200	184	Peak
3		2423.820	89.81	30.09	119.89	N/A	N/A	200	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

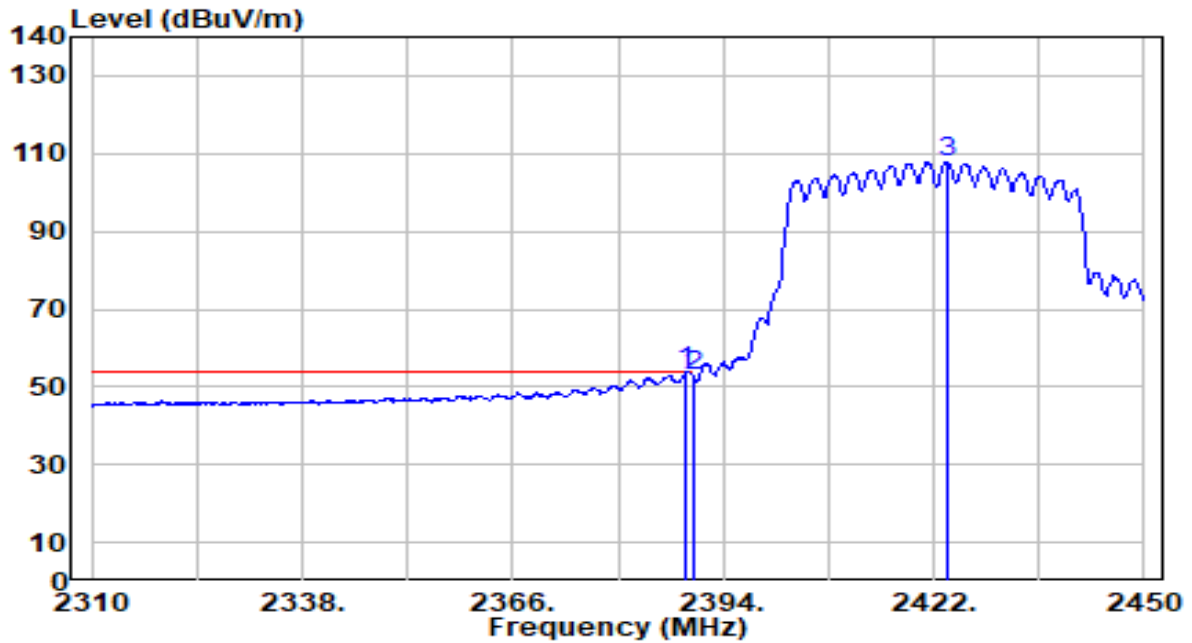


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.960	23.72	29.99	53.71	-0.29	54.00	200	184	Average
2		2390.000	22.75	29.99	52.74	-1.26	54.00	200	184	Average
3		2423.680	77.74	30.09	107.83	N/A	N/A	200	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

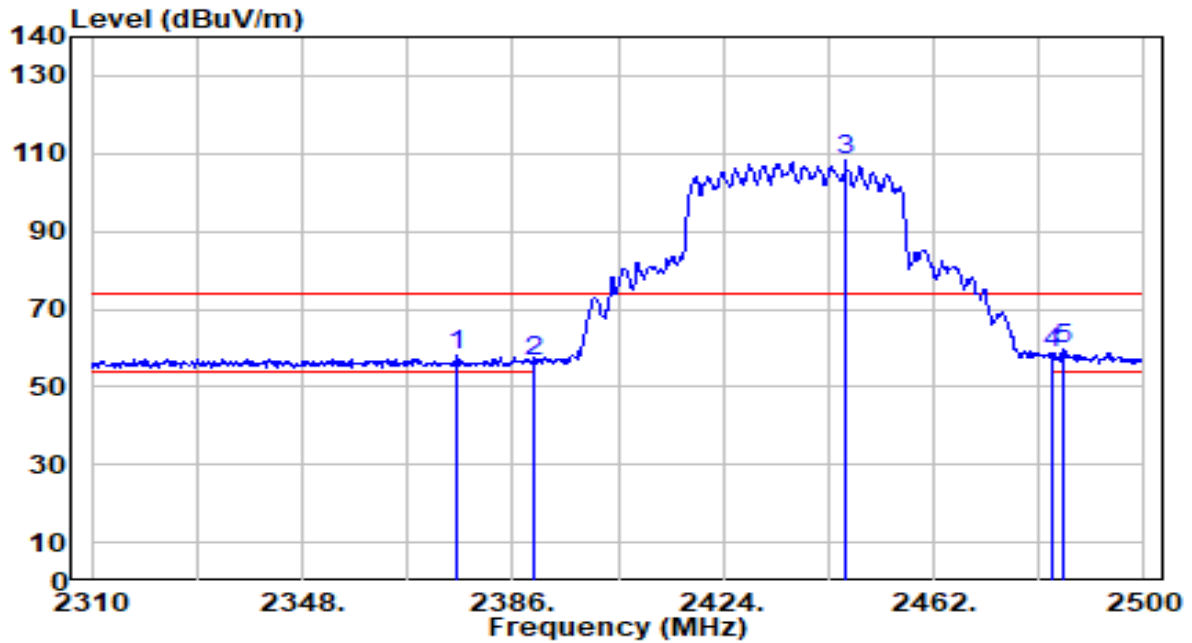


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2376.120	28.13	29.98	58.10	-15.90	74.00	150	195	Peak
2	2390.000	26.31	29.99	56.31	-17.69	74.00	150	195	Peak
3	2446.040	78.07	30.16	108.23	N/A	N/A	150	195	Peak
4	2483.500	28.42	30.29	58.70	-15.30	74.00	150	195	Peak
5	* 2485.370	29.54	30.29	59.83	-14.17	74.00	150	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

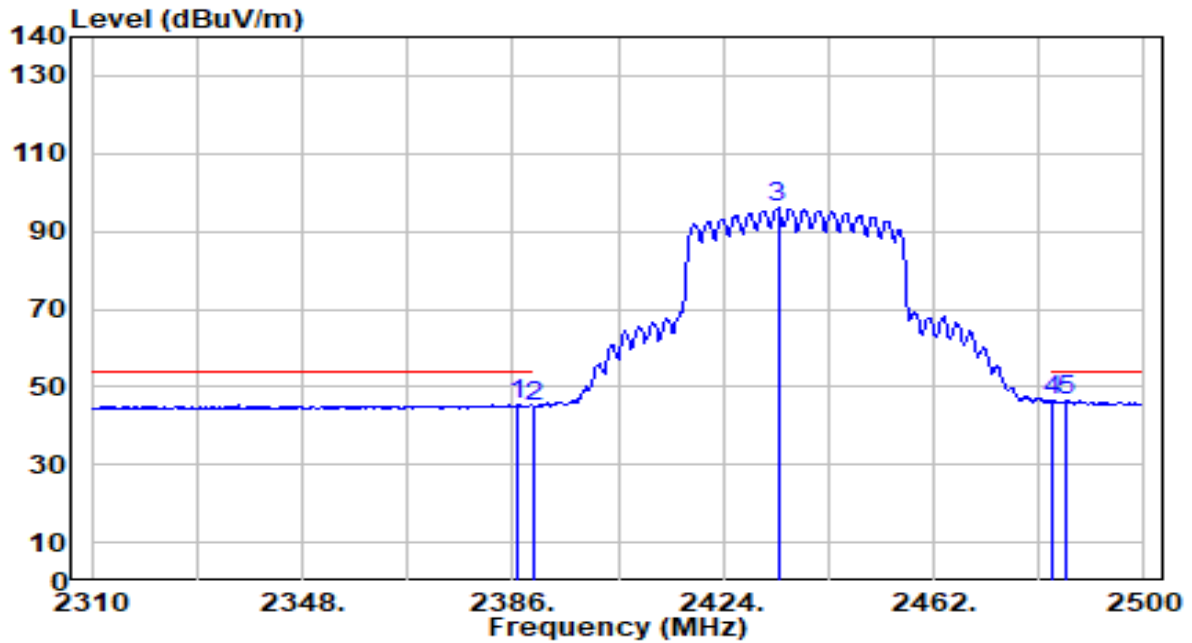


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	15.47	29.99	45.46	-8.54	54.00	150	195	Average
2	2390.000	15.00	29.99	44.99	-9.01	54.00	150	195	Average
3	2433.880	65.89	30.12	96.01	N/A	N/A	150	195	Average
4	2483.500	16.28	30.29	46.56	-7.44	54.00	150	195	Average
5	* 2486.130	16.36	30.29	46.65	-7.35	54.00	150	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

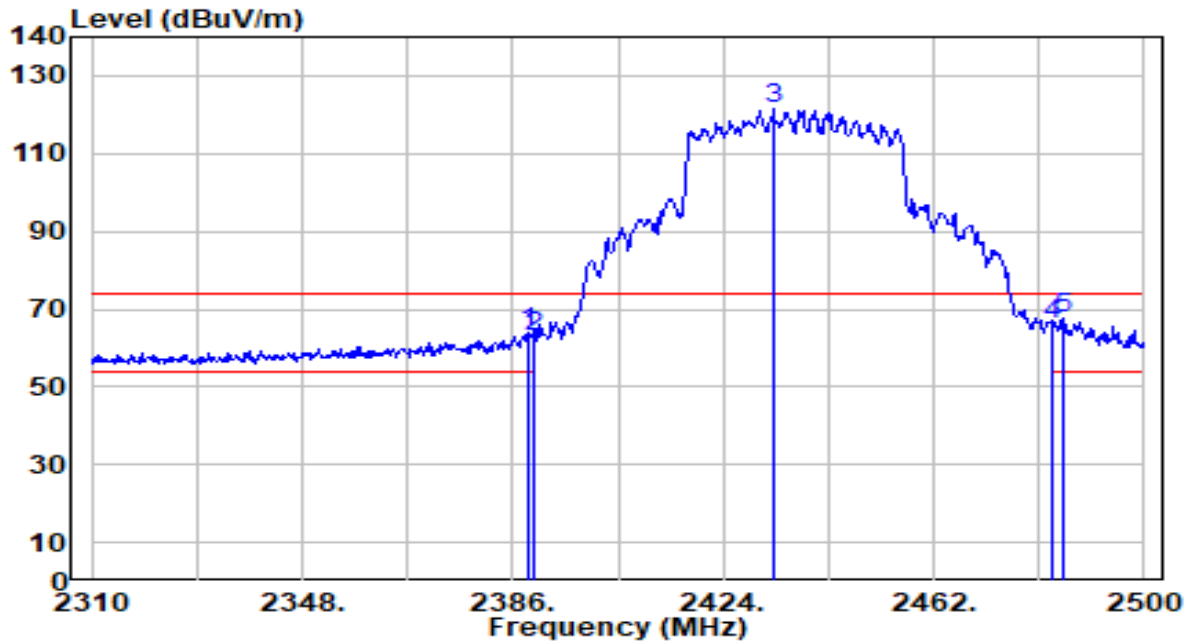


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	33.67	29.99	63.67	-10.33	74.00	176	8	Peak
2	2390.000	32.82	29.99	62.81	-11.19	74.00	176	8	Peak
3	2433.120	91.33	30.12	121.45	N/A	N/A	176	8	Peak
4	2483.500	35.99	30.29	66.28	-7.72	74.00	176	8	Peak
5	* 2485.560	37.19	30.29	67.48	-6.52	74.00	176	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

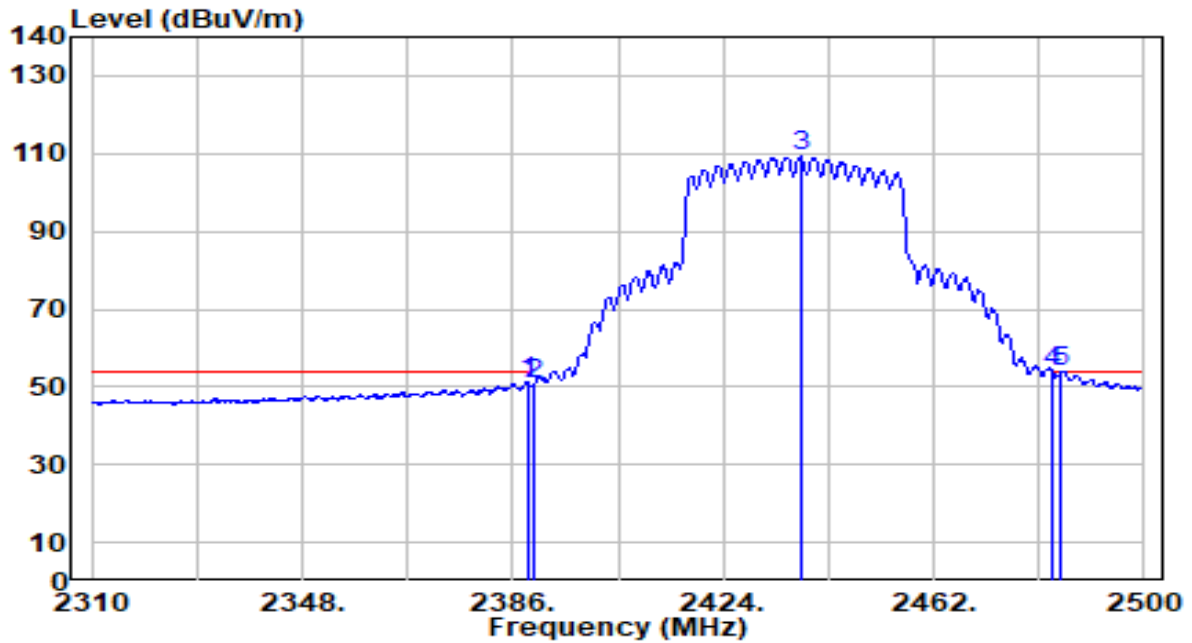


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	21.44	29.99	51.43	-2.57	54.00	176	8	Average
2	2390.000	20.52	29.99	50.51	-3.49	54.00	176	8	Average
3	2438.060	79.16	30.13	109.30	N/A	N/A	176	8	Average
4	2483.500	23.64	30.29	53.93	-0.07	54.00	176	8	Average
5	* 2484.990	23.66	30.29	53.95	-0.05	54.00	176	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

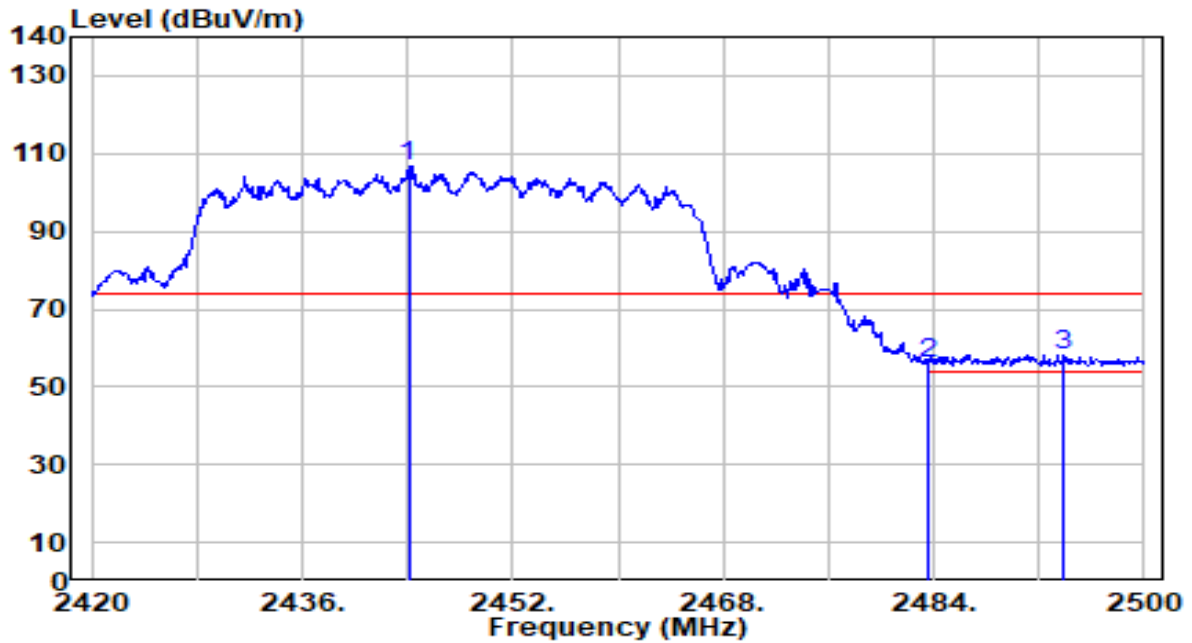


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2444.080	76.41	30.15	106.57	N/A	N/A	100	202	Peak
2	2483.500	25.68	30.29	55.96	-18.04	74.00	100	202	Peak
3	* 2493.840	27.81	30.32	58.13	-15.87	74.00	100	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

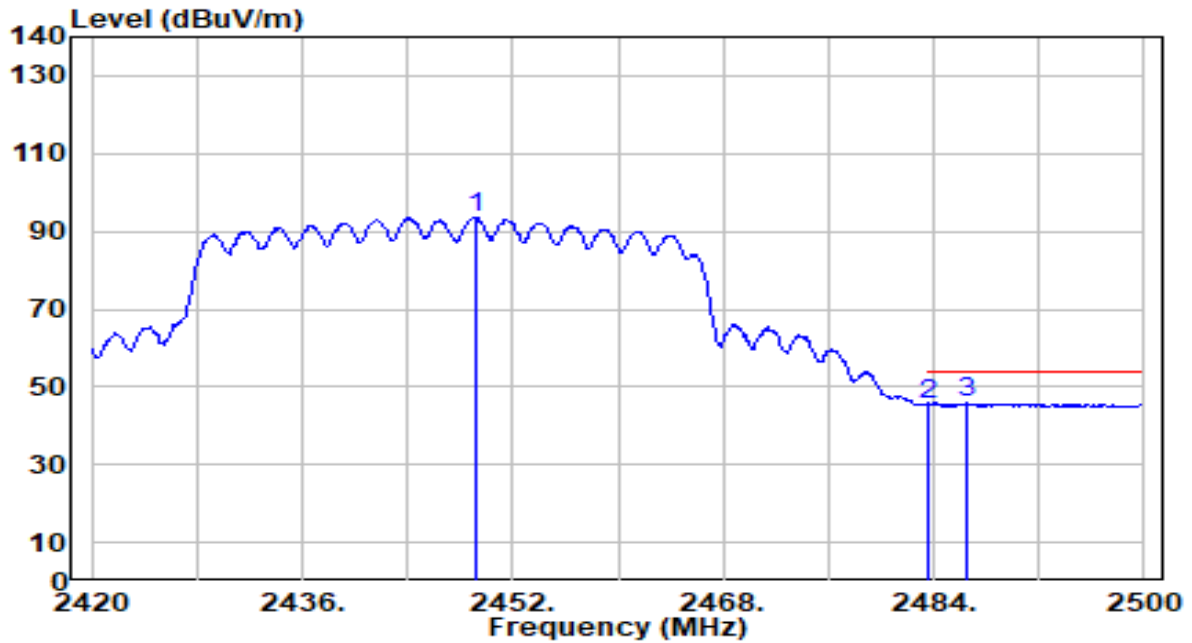


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.200	63.45	30.17	93.62	N/A	N/A	100	202	Average
2	2483.500	15.13	30.29	45.42	-8.58	54.00	100	202	Average
3	* 2486.480	15.47	30.30	45.76	-8.24	54.00	100	202	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

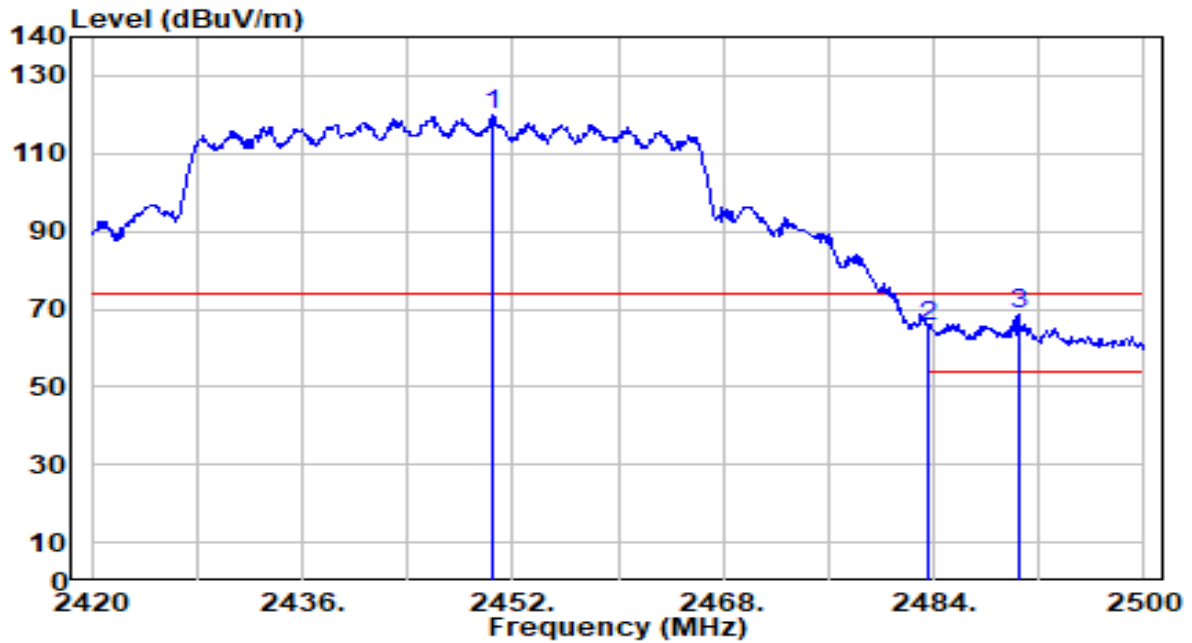


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.560	89.54	30.18	119.72	N/A	N/A	176	4	Peak
2	2483.500	35.48	30.29	65.76	-8.24	74.00	176	4	Peak
3	* 2490.400	38.27	30.31	68.58	-5.42	74.00	176	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

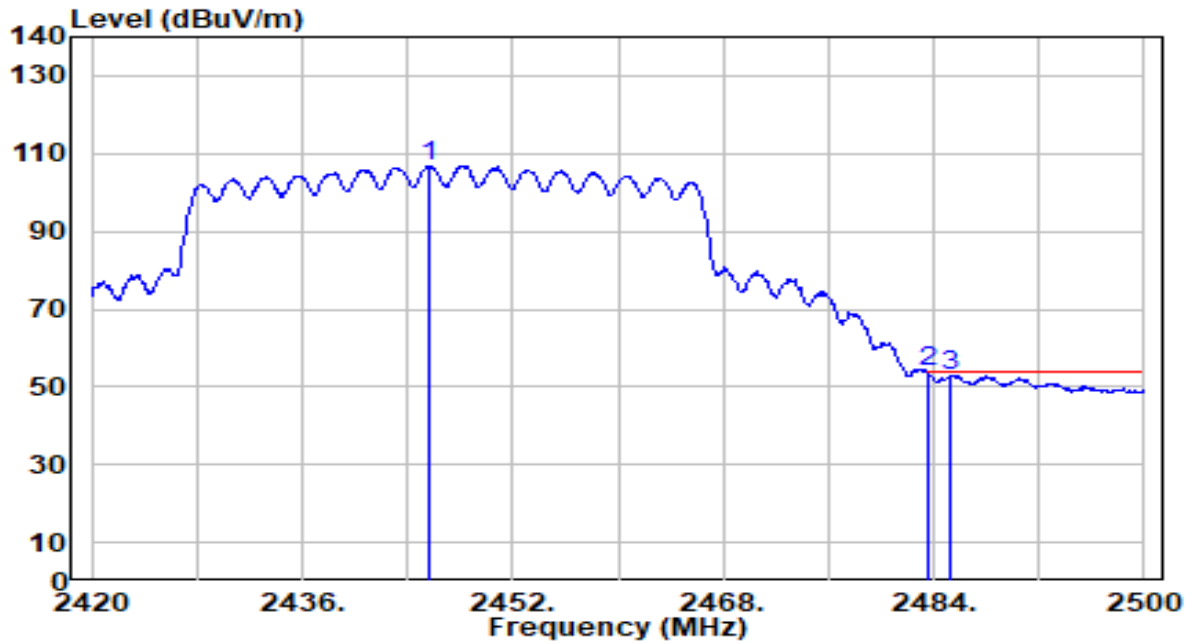


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.600	76.71	30.16	106.87	N/A	N/A	176	4	Average
2	* 2483.500	23.50	30.29	53.79	-0.21	54.00	176	4	Average
3	2485.280	22.74	30.29	53.03	-0.97	54.00	176	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

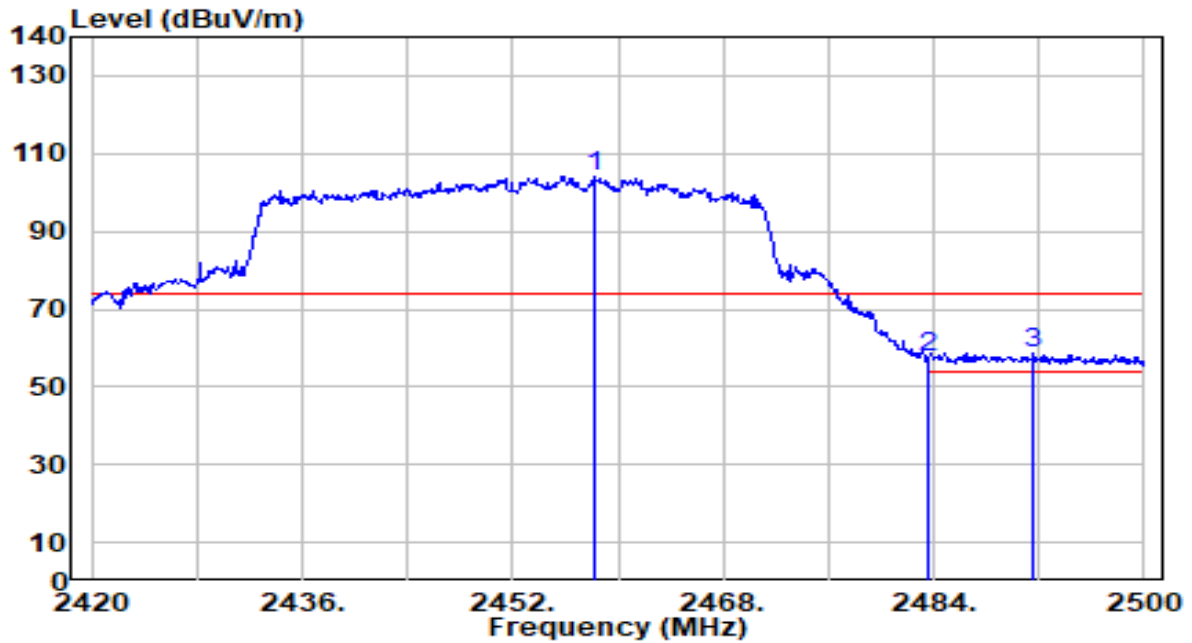


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.320	74.10	30.20	104.30	N/A	N/A	100	242	Peak
2	2483.500	27.33	30.29	57.62	-16.38	74.00	100	242	Peak
3	* 2491.520	28.38	30.31	58.69	-15.31	74.00	100	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

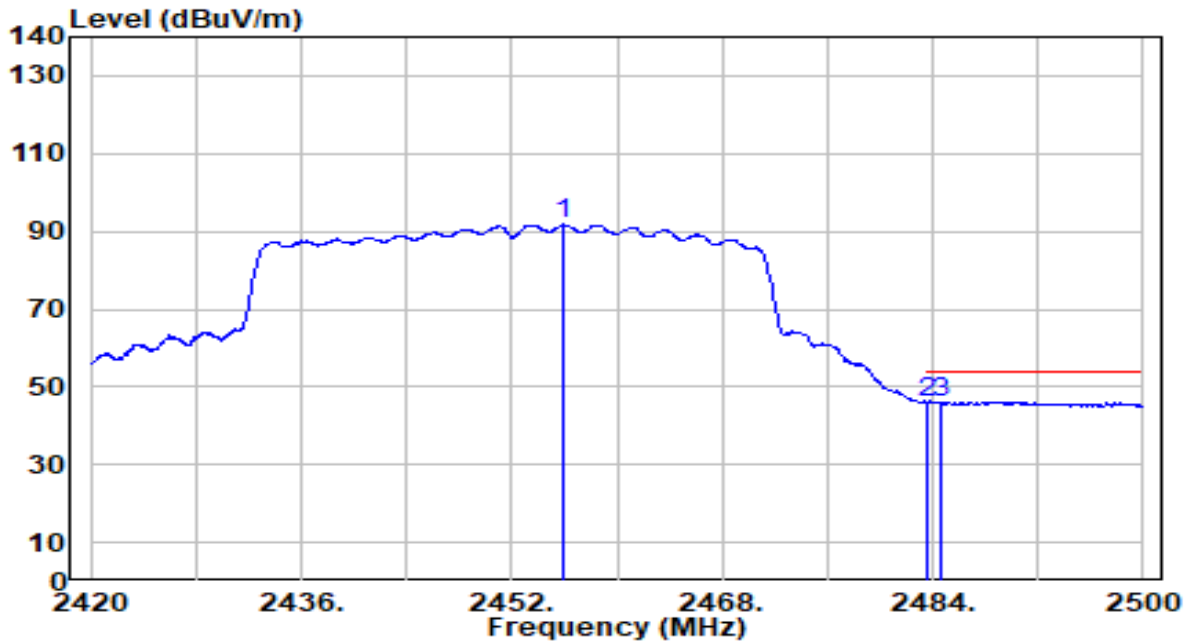


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.000	61.56	30.19	91.75	N/A	N/A	100	242	Average
2	2483.500	15.92	30.29	46.20	-7.80	54.00	100	242	Average
3	* 2484.560	15.91	30.29	46.20	-7.80	54.00	100	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

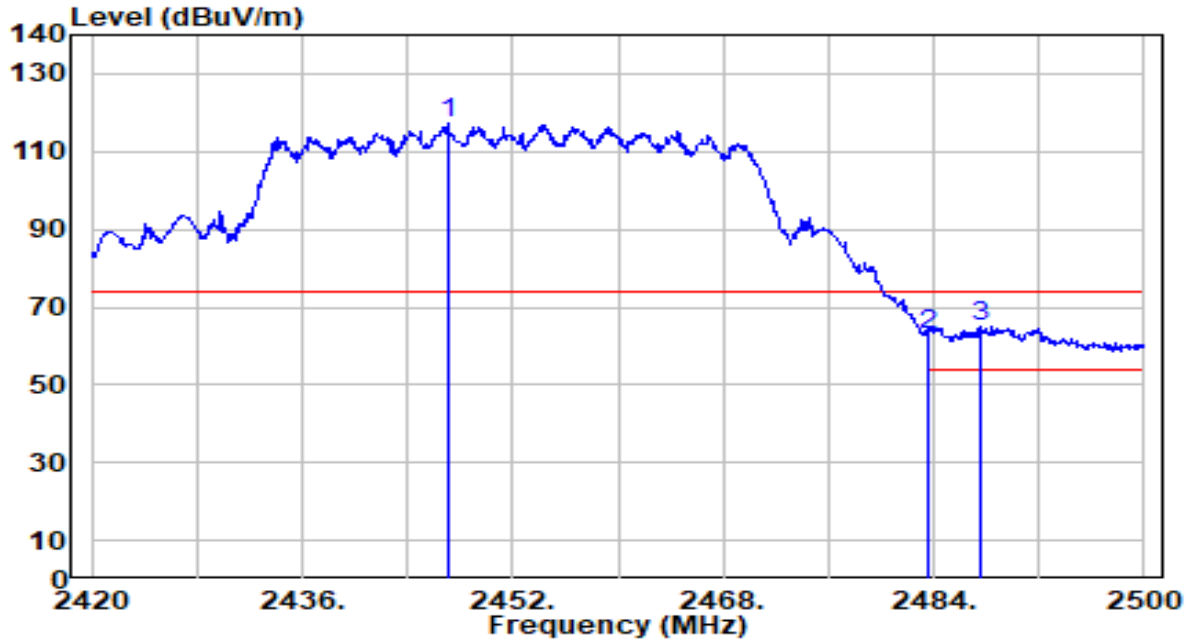


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.040	86.88	30.16	117.05	N/A	N/A	180	6	Peak
2	2483.500	32.74	30.29	63.02	-10.98	74.00	180	6	Peak
3	* 2487.520	34.72	30.30	65.02	-8.98	74.00	180	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-10
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

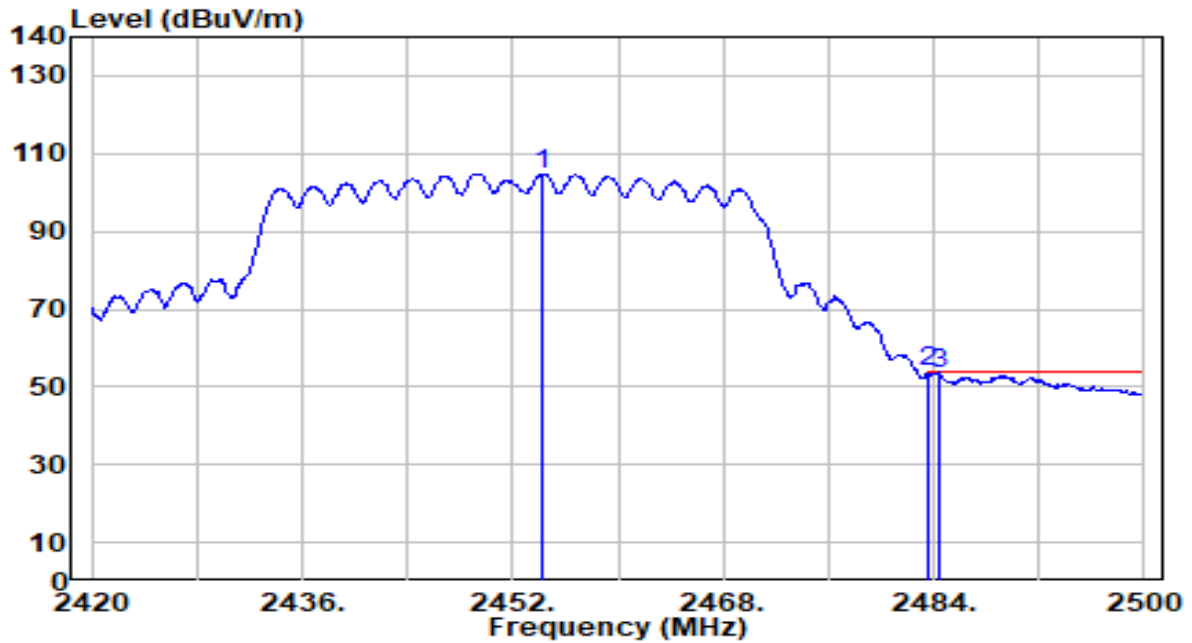

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.240	74.56	30.19	104.75	N/A	N/A	180	6	Average
2	* 2483.500	23.53	30.29	53.81	-0.19	54.00	180	6	Average
3	2484.480	23.07	30.29	53.36	-0.64	54.00	180	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

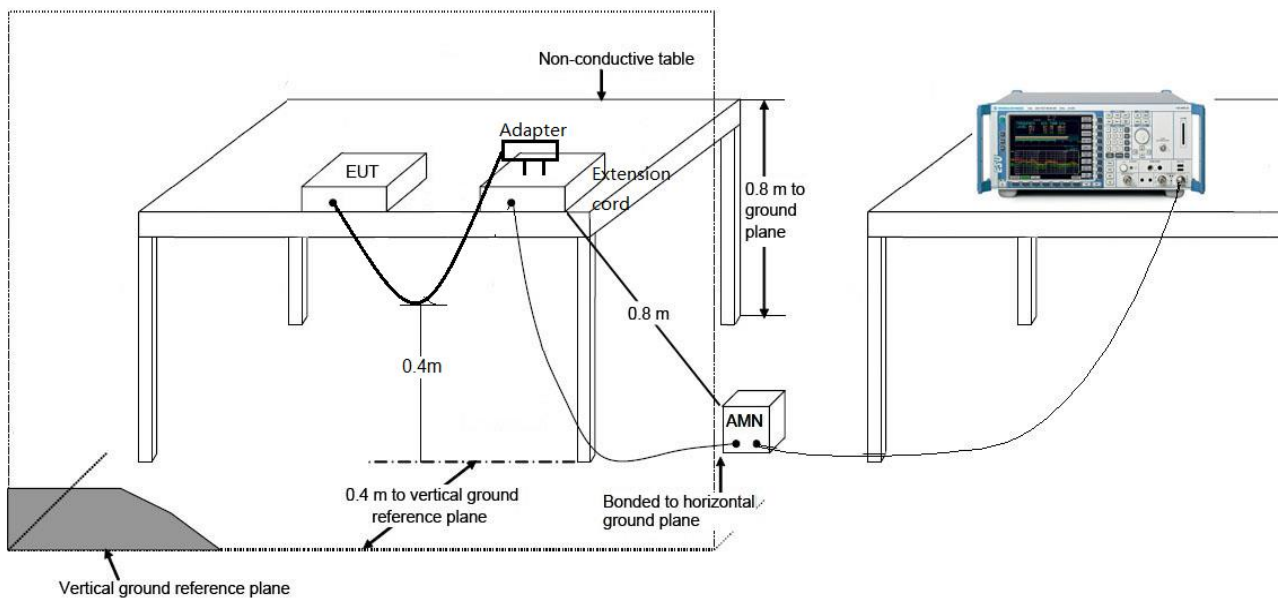

7.8.3. Test Result

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-18
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.1°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

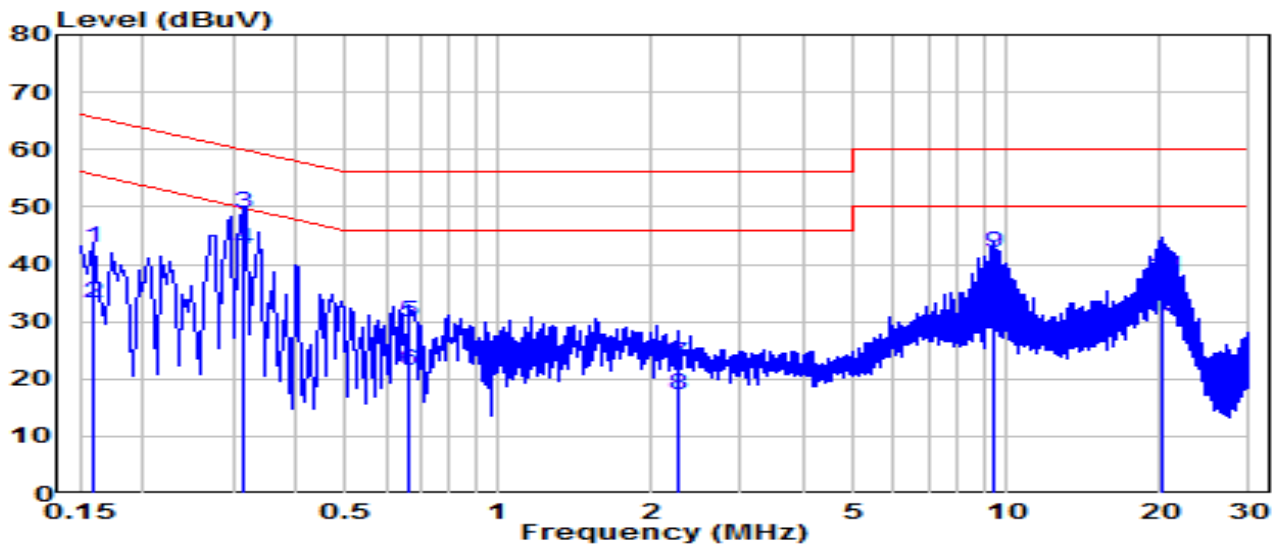


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	33.10	9.62	42.72	-22.80	65.52	QP
2	0.159	23.59	9.62	33.21	-22.31	55.52	Average
3	* 0.316	39.18	9.63	48.81	-10.99	59.80	QP
4	* 0.316	33.04	9.63	42.67	-7.13	49.80	Average
5	0.667	20.12	9.65	29.77	-26.23	56.00	QP
6	0.667	11.78	9.65	21.44	-24.56	46.00	Average
7	2.247	13.08	9.69	22.78	-33.22	56.00	QP
8	2.247	7.63	9.69	17.32	-28.68	46.00	Average
9	9.473	32.17	9.85	42.02	-17.98	60.00	QP
10	9.473	21.30	9.85	31.15	-18.85	50.00	Average
11	20.317	27.77	9.93	37.70	-22.30	60.00	QP
12	20.317	20.76	9.93	30.69	-19.31	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-18
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.1°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

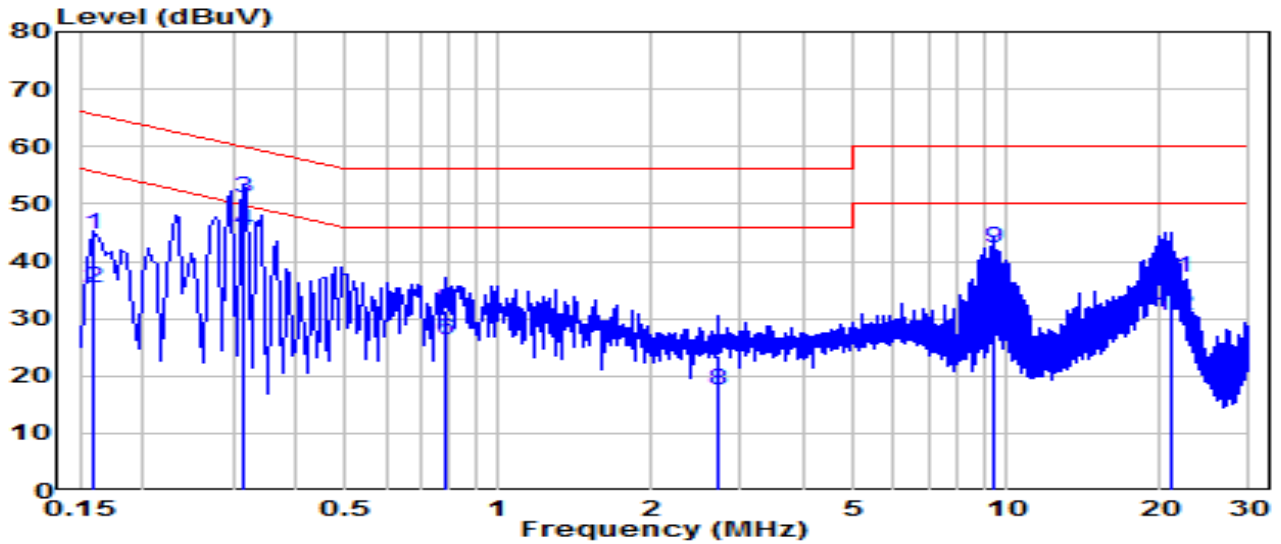


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	35.15	9.62	44.77	-20.75	65.52	QP
2	0.159	25.79	9.62	35.41	-20.11	55.52	Average
3	* 0.316	41.50	9.63	51.13	-8.67	59.80	QP
4	* 0.316	35.66	9.63	45.29	-4.51	49.80	Average
5	0.789	21.85	9.66	31.51	-24.49	56.00	QP
6	0.789	16.68	9.66	26.34	-19.66	46.00	Average
7	2.715	13.90	9.70	23.60	-32.40	56.00	QP
8	2.715	7.84	9.70	17.54	-28.46	46.00	Average
9	9.473	32.52	9.86	42.38	-17.62	60.00	QP
10	9.473	21.19	9.86	31.05	-18.95	50.00	Average
11	21.167	27.20	10.00	37.21	-22.79	60.00	QP
12	21.167	20.40	10.00	30.41	-19.59	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-18
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.1°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

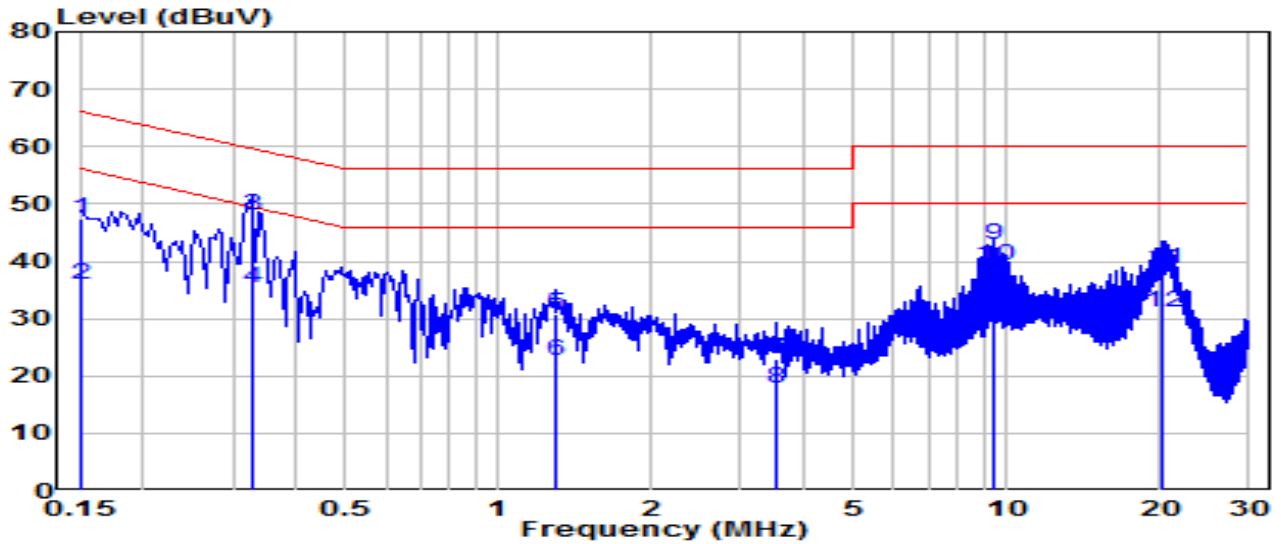


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	37.92	9.62	47.54	-18.46	66.00	QP
2	0.150	26.37	9.62	35.99	-20.01	56.00	Average
3	0.330	38.27	9.63	47.90	-11.55	59.45	QP
4	0.330	25.82	9.63	35.45	-14.00	49.45	Average
5	1.297	21.09	9.68	30.77	-25.23	56.00	QP
6	1.297	13.11	9.68	22.79	-23.21	46.00	Average
7	3.511	13.36	9.72	23.08	-32.92	56.00	QP
8	3.511	8.22	9.72	17.94	-28.06	46.00	Average
9	* 9.428	33.08	9.85	42.92	-17.08	60.00	QP
10	* 9.428	29.31	9.85	39.15	-10.85	50.00	Average
11	20.290	28.71	9.93	38.64	-21.36	60.00	QP
12	20.290	21.27	9.93	31.20	-18.80	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-05-18
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.1°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

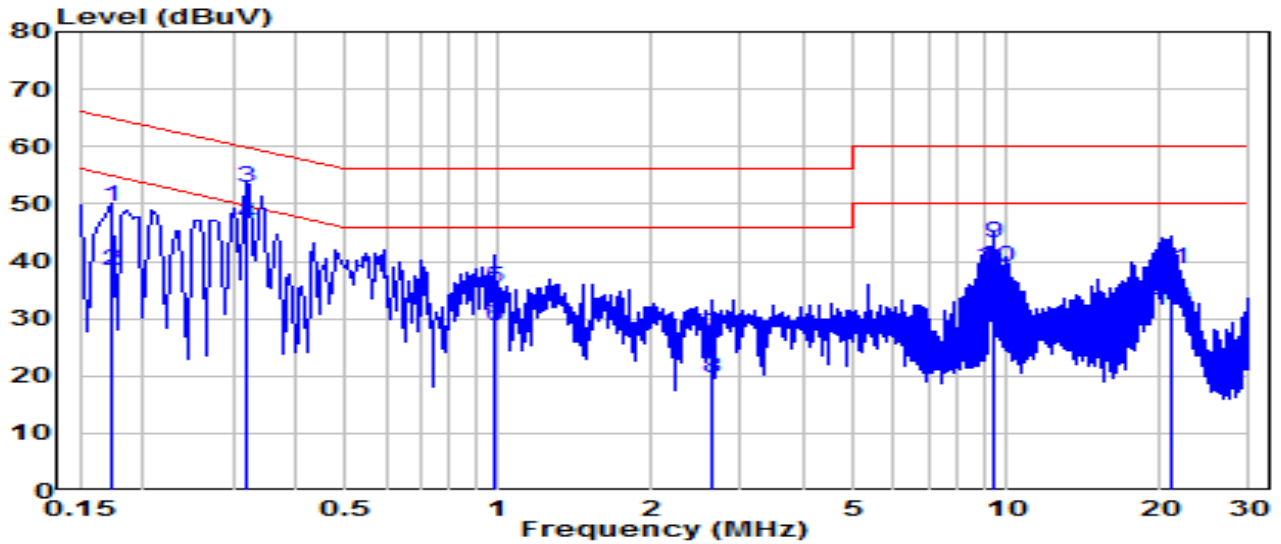

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	39.77	9.62	49.39	-15.45	64.84	QP
2	0.172	28.65	9.62	38.27	-16.57	54.84	Average
3	* 0.321	43.20	9.63	52.83	-6.85	59.68	QP
4	* 0.321	37.00	9.63	46.63	-3.05	49.68	Average
5	0.987	25.80	9.67	35.47	-20.53	56.00	QP
6	0.987	18.90	9.67	28.57	-17.43	46.00	Average
7	2.625	17.35	9.70	27.05	-28.95	56.00	QP
8	2.625	9.87	9.70	19.57	-26.43	46.00	Average
9	9.428	33.42	9.86	43.28	-16.72	60.00	QP
10	9.428	28.99	9.86	38.85	-11.15	50.00	Average
11	20.951	28.62	10.00	38.62	-21.38	60.00	QP
12	20.951	21.51	10.00	31.52	-18.48	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Photograph

Refer to “2305TW0103-UT” file.

Appendix B : EUT Photograph

Refer to “2305TW0103-UE” file.

Appendix C : Internal Photograph

Refer to “2305TW0103-UI” file.

_____ The End _____