

## RF MEASUREMENT REPORT (Class II Change)

---

**FCC ID** : 2AXJ4AX72PRO  
**Applicant** : TP-Link Corporation Limited.  
**Application Type** : Certification  
**Product** : AX5400 Multi-Gigabit Wi-Fi 6 Router  
**Model No.** : Archer AX72 Pro, EX710 Pro  
**Brand Name** : tp-link  
**FCC Classification** : Unlicensed National Information Infrastructure (NII)  
**FCC Rule Part(s)** : Part15 Subpart E (Section 15.407)  
**Received Date** : July 28, 2023  
**Test Date** : August 2, 2023~ August 18, 2023

**Test By** : Owen Tsai  
( Owen Tsai )

**Reviewed By** : Paddy Chen  
( Paddy Chen )

**Approved By** : Chenz Ker  
( Chenz Ker )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date	Note
2307TW0119-U1	1.0	Original Report	2023-09-15	Valid

Note: This report is prepared for FCC Class II permissive change supplement based on the FCC ID: 2AXJ4AX72PRO, original grant date: 12/02/2022, the changes and verified item refer to the section 2.5 of this report.

# CONTENTS

Description	Page
<b>General Information</b> .....	<b>5</b>
<b>1. INTRODUCTION</b> .....	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION</b> .....	<b>7</b>
2.1. Equipment Description .....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Working Frequencies for this report .....	8
2.4. Description of Available Antennas .....	9
2.5. Test Details for Class II Permissive Change .....	10
2.6. Test Mode .....	10
2.7. Configuration of Test System .....	11
2.8. Test System Details .....	11
2.9. Description of Test Software.....	11
2.10. Applied Standards .....	12
2.11. Test Configuration .....	12
2.12. EMI Suppression Device(s)/Modifications .....	12
2.13. Labeling Requirements .....	12
<b>3. DESCRIPTION OF TEST</b> .....	<b>13</b>
3.1. Evaluation Procedure .....	13
3.2. AC Line Conducted Emissions.....	13
3.3. Radiated Emissions.....	14
<b>4. ANTENNA REQUIREMENTS</b> .....	<b>15</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE</b> .....	<b>16</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>17</b>
<b>7. TEST RESULT</b> .....	<b>18</b>
7.1. Summary .....	18
7.2. Output Power Measurement .....	19
7.2.1. Test Limit .....	19
7.2.2. Test Procedure Used.....	19
7.2.3. Test Setting.....	19
7.2.4. Test Setup .....	19
7.2.5. Test Result.....	20
7.3. Radiated Spurious Emission Measurement .....	26

---

7.3.1. Test Limit .....	26
7.3.2. Test Procedure Used.....	26
7.3.3. Test Setting.....	26
7.3.4. Test Setup .....	28
7.3.5. Test Result.....	29
7.4. Radiated Restricted Band Edge Measurement .....	45
7.4.1. Test Limit .....	45
7.4.2. Test Procedure Used.....	46
7.4.3. Test Setting.....	46
7.4.4. Test Setup .....	47
7.4.5. Test Result.....	48
<b>8. CONCLUSION.....</b>	<b>62</b>
<b>Appendix A : Test Setup Photograph.....</b>	<b>63</b>
<b>Appendix B : External Photograph .....</b>	<b>63</b>
<b>Appendix C : Internal Photograph.....</b>	<b>63</b>

## General Information

<b>Applicant</b>	TP-Link Corporation Limited.
<b>Applicant Address</b>	Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong
<b>Manufacturer</b>	TP-Link Corporation Limited.
<b>Manufacturer Address</b>	Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong
<b>Test Site</b>	MRT Technology (Taiwan) Co., Ltd
<b>Test Site Address</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
<b>MRT FCC Registration No.</b>	291082
<b>FCC Rule Part(s)</b>	Part 15.407

## Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


# 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

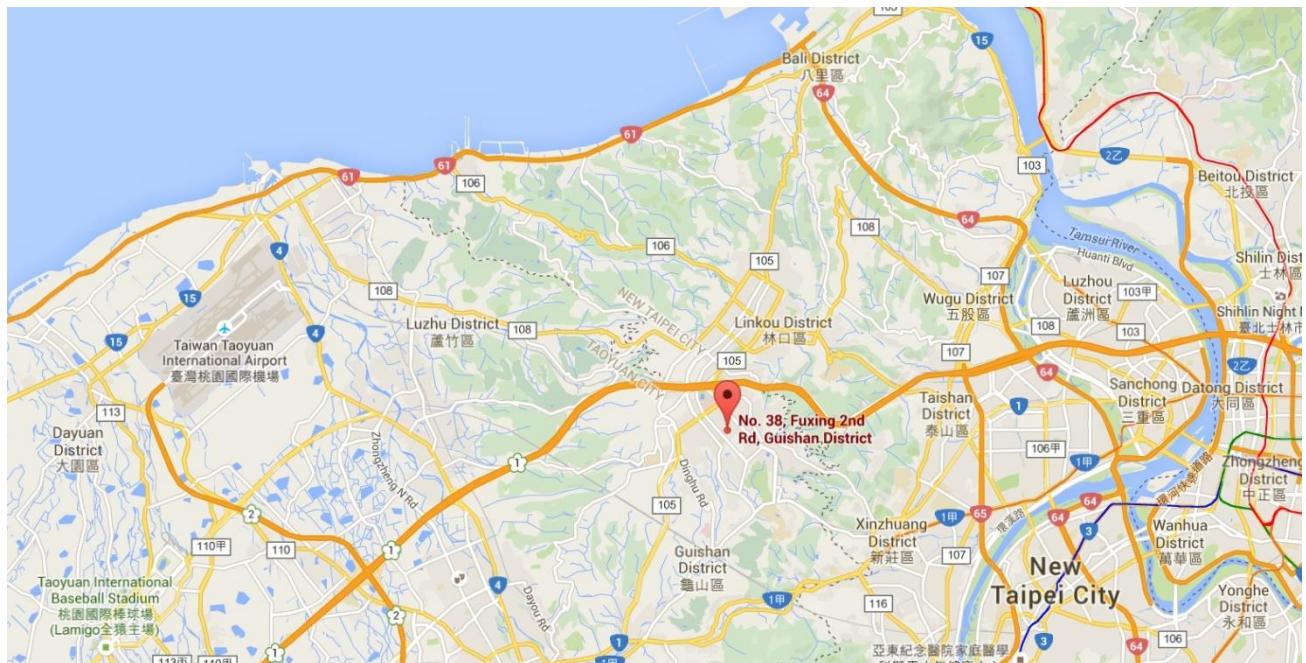

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	AX5400 Multi-Gigabit Wi-Fi 6 Router
Model No.:	Archer AX72 Pro, EX710 Pro
Brand Name:	tp-link
Wi-Fi Specification:	802.11a/b/g/n/ac/ax
EUT Identification No.:	#1-1 (Conducted) #1-2 (Radiated)
Accessory	
Adapter	BRAND: MASS POWER MODEL: NBS30D120250VU INPUT: 100 - 240V ~ 50/60Hz 0.8A OUTPUT: DC 12.0V 2.5A
Note: Hardware design and PCB layout are the same between the two models, only the model for our marketing strategy is different. Archer AX72 Pro is selected for testing.	

### 2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz For 802.11ac-VHT160/ax-HE160: 5250MHz, 5570MHz
Type of Modulation:	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 600Mbps 802.11ac: up to 3466.7Mbps 802.11ax: up to 4804Mbps

Note: For other features of this EUT, test report will be issued separately.

### 2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

802.11ac-VHT160/ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250MHz	114	5570 MHz	--	--



## 2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	T <sub>X</sub> Paths	Max Antenna Gain (dBi)	Beamforming Directional Gain (dBi)	CDD Directional Gain (dBi)	
					For Power	For PSD
Dipole Antenna	2412 ~ 2462	2	2.00	5.01	2.00	5.01
	5150 ~ 5250	4	1.91	7.93	1.91	7.93
	5250 ~ 5350	4	2.27	8.29	2.27	8.29
	5470 ~ 5725	4	2.50	8.52	2.50	8.52
	5725 ~ 5850	4	2.50	8.52	2.50	8.52

Remark:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.  
If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.
  - For power spectral density (PSD) measurements on all devices,  
Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB;
  - For power measurements on IEEE 802.11 devices,  
Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ac/ax, not include 802.11a/b/g/n. BF Directional gain =  $G_{ANT} + 10 \log (N_{ANT})$ .
- The Messages as above is from the antenna specifications.

Test Mode	T <sub>X</sub> Paths	CDD Mode	Beamforming Mode
802.11b/g/n	2	√	X
802.11ax	2	√	√
802.11a/n(NII)	4	√	X
802.11ac/ax (NII)	4	√	√

## 2.5. Test Details for Class II Permissive Change

C2PC Change List	Verified Test Item	Remark
the Wi-Fi 5GHz FEM (Front-end Modules) IC has been changed. And the new FEM IC is Pin-to-Pin compatible with the previous one.	Output Power	Radiated Emission: Only worst-case channels were verified.
	General Field Strength (Restricted Bands and Radiated Emission)	

Note: This product is an extension based on the FCC ID: 2AXJ4AX72PRO, original grant date: 12/02/2022, the changes and verified item refer to the table as above.

## 2.6. Test Mode


CDD mode
Mode 1: Transmit by 802.11a_N <sub>SS</sub> =1(6Mbps)
Mode 2: Transmit by 802.11ac-VHT20_N <sub>SS</sub> =1 (MCS0)
Mode 3: Transmit by 802.11ac-VHT40_N <sub>SS</sub> =1 (MCS0)
Mode 4: Transmit by 802.11ac-VHT80_N <sub>SS</sub> =1 (MCS0)
Mode 5: Transmit by 802.11ac-VHT160_N <sub>SS</sub> =1 (MCS0)
Mode 6: Transmit by 802.11ax-HE20_N <sub>SS</sub> =1 (MCS0)
Mode 7: Transmit by 802.11ax-HE40_N <sub>SS</sub> =1 (MCS0)
Mode 8: Transmit by 802.11ax-HE80_N <sub>SS</sub> =1 (MCS0)
Mode 9: Transmit by 802.11ax-HE160_N <sub>SS</sub> =1 (MCS0)
Beamforming mode
Mode 10: Transmit by 802.11ac-VHT20_N <sub>SS</sub> =1 (MCS0)
Mode 11: Transmit by 802.11ac-VHT40_N <sub>SS</sub> =1 (MCS0)
Mode 12: Transmit by 802.11ac-VHT80_N <sub>SS</sub> =1 (MCS0)
Mode 13: Transmit by 802.11ac-VHT160_N <sub>SS</sub> =1 (MCS0)
Mode 14: Transmit by 802.11ax-HE20_N <sub>SS</sub> =1 (MCS0)
Mode 15: Transmit by 802.11ax-HE40_N <sub>SS</sub> =1 (MCS0)
Mode 16: Transmit by 802.11ax-HE80_N <sub>SS</sub> =1 (MCS0)
Mode 17: Transmit by 802.11ax-HE160_N <sub>SS</sub> =1 (MCS0)
Remark:
1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.
2. For CDD mode, this device supports 4 N <sub>SS</sub> and power level is the same of spatial multiplexing. The worst case is N <sub>SS</sub> =1.
3. Due to the same modulation between 802.11n and 802.11ac, so 802.11n-HT20 and HT40 are covered by 802.11ac-VHT20 and VHT40 in this report, meanwhile, power level for 802.11n-HT20

and HT40 will not be greater than 802.11ac-VHT20 and VHT40.

4. Due to CDD mode was the worst mode, so all test items were evaluated in this report. The beamforming mode only evaluated the RF output power.
5. EUT supports one configuration only in 802.11ax full RU mode.

## 2.7. Configuration of Test System

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

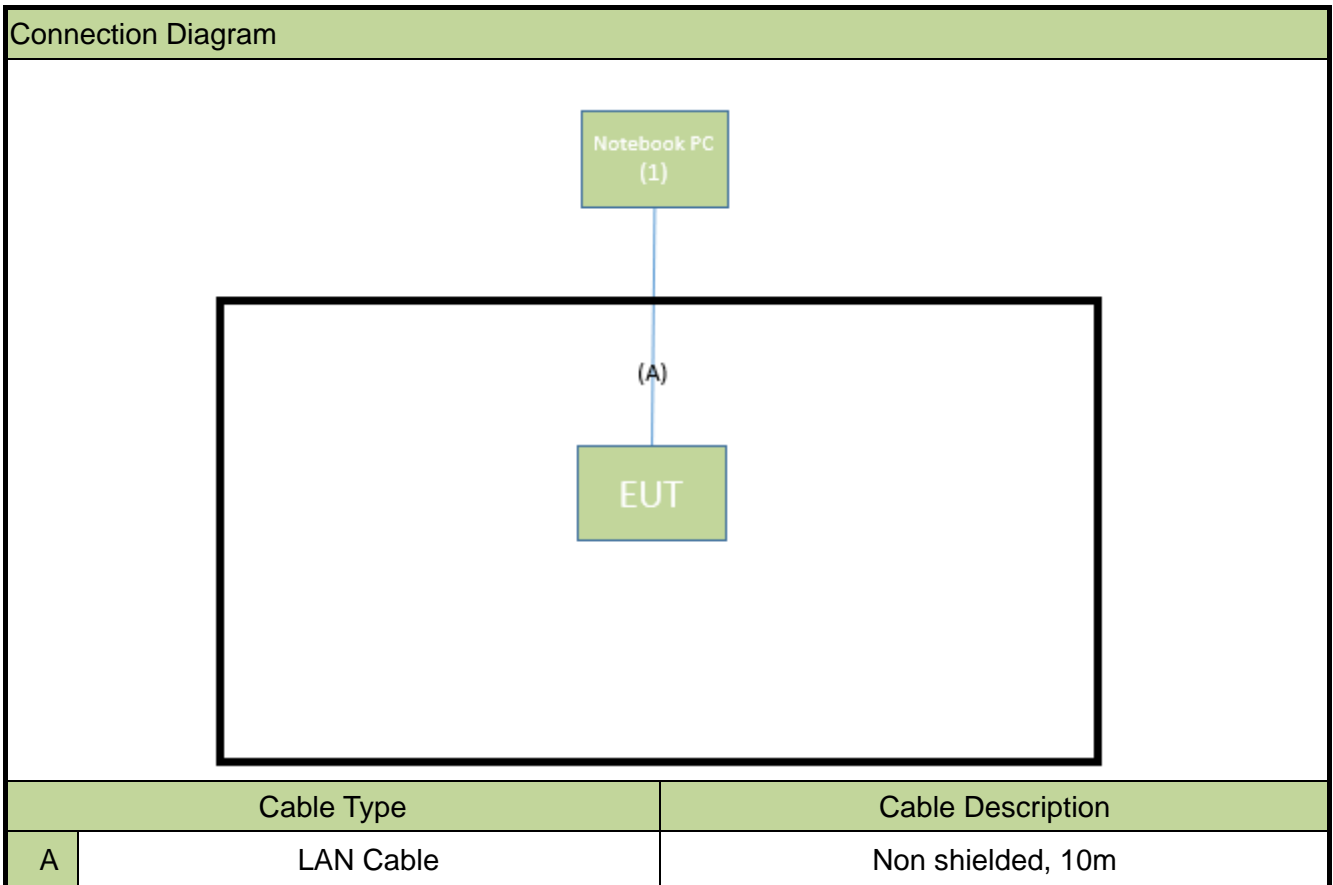

## 2.8. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	20Y7-006KTW	N/A	Non-Shielded, 0.8m

## 2.9. Description of Test Software

The test utility software used during testing was "QSPR", the version is ver5.0-00188.

Note: Final power setting please refer to operational description.

## 2.10. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 789033 D02v02r01,
- KDB 662911 D01v02r01
- ANSI C63.10-2013

## 2.11. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.12. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.13. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### **3. DESCRIPTION OF TEST**

#### **3.1. Evaluation Procedure**

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

#### **3.2. AC Line Conducted Emissions**

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2024/5/22
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2023/12/21
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2024/5/17
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2024/5/17
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2024/3/20
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2024/3/27
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2024/3/8
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2024/6/29
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2024/6/26
Cable	HUBERSUHNER	EMC105-NM-N M-3000	MRTTWE00035	1 year	2024/6/26
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2024/6/4

### Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2024/4/19
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2023/10/5
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2024/7/19
Attenuator	WTI	218FS-20	MRTTWE00026	1 year	2023/11/2
Attenuator	WTI	218FS-10	MRTTWE00027	1 year	2024/6/14
Attenuator	WTI	218FS-06	MRTTWE00028	1 year	2024/6/14
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2024/6/11
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2024/6/15

Software	Version	Function
e3	9.160520a	EMI Test Software



## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Radiated Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: $\pm 4.25\text{dB}$ 1GHz ~ 40GHz: $\pm 4.45\text{dB}$
<b>Conducted Power (Carrier Power / Power Density)</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.84\text{dB}$
<b>Temp. / Humidity</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.82^\circ\text{C} / \pm 3\%$

## 7. TEST RESULT

### 7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to section 7.2	Conducted	Pass	Section 7.2
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.7 & 7.8
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

## 7.2. Output Power Measurement

### 7.2.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### 7.2.2. Test Procedure Used

KDB 789033D02v02r01- Section II) E)3)b) Method PM-G

### 7.2.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 7.2.4. Test Setup

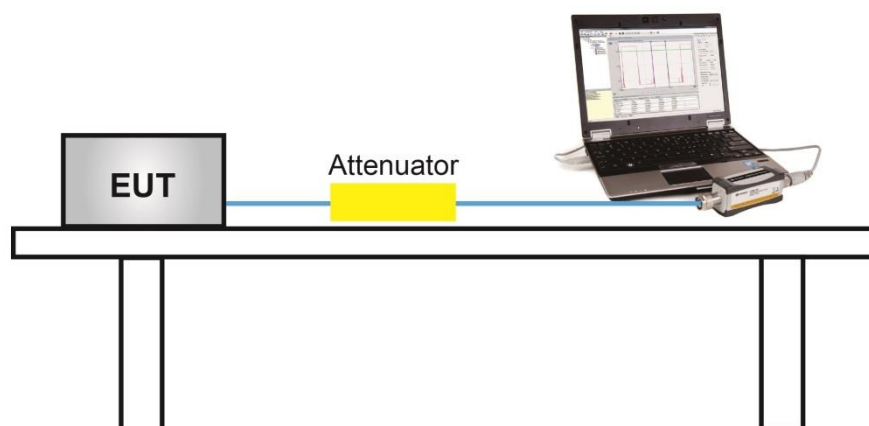

### 7.2.5. Test Result

Product	AX5400 Multi-Gigabit Wi-Fi 6 Router	Test Engineer	Xuan Yu
Test Site	SR6	Test Date	2023/08/03
Test Mode	CDD Mode		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	Result
				Ant 0	Ant 1	Ant 2	Ant 3			
11a	6Mbps	36	5180	20.34	20.03	18.65	19.95	25.81	≤ 30.00	Pass
11a	6Mbps	44	5220	20.14	19.99	18.56	19.65	25.65	≤ 30.00	Pass
11a	6Mbps	48	5240	19.70	19.66	18.37	19.36	25.32	≤ 30.00	Pass
11a	6Mbps	52	5260	13.35	13.19	12.36	13.42	19.12	≤ 23.98	Pass
11a	6Mbps	60	5300	13.58	13.13	12.82	13.44	19.27	≤ 23.98	Pass
11a	6Mbps	64	5320	13.13	12.84	12.40	12.96	18.86	≤ 23.98	Pass
11a	6Mbps	100	5500	13.54	12.81	13.29	13.03	19.20	≤ 23.98	Pass
11a	6Mbps	116	5580	13.86	13.72	13.47	13.12	19.57	≤ 23.98	Pass
11a	6Mbps	140	5700	13.60	13.14	12.77	13.17	19.20	≤ 23.98	Pass
11a	6Mbps	144	5720	13.60	13.40	12.66	13.08	19.22	≤ 22.72	Pass
11a	6Mbps	149	5745	23.62	23.58	22.13	23.32	29.22	≤ 30.00	Pass
11a	6Mbps	157	5785	23.54	23.61	21.97	23.45	29.21	≤ 30.00	Pass
11a	6Mbps	165	5825	23.26	23.22	21.64	23.13	28.88	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	20.72	20.48	19.16	20.25	26.21	≤ 30.00	Pass
11ac-VHT20	MCS0	40	5220	20.55	20.44	19.11	20.11	26.11	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	20.20	20.23	18.85	19.72	25.81	≤ 30.00	Pass
11ac-VHT20	MCS0	52	5260	14.52	14.05	13.28	14.33	20.09	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	14.04	13.60	13.28	13.73	19.69	≤ 23.98	Pass
11ac-VHT20	MCS0	64	5320	13.69	13.36	12.88	13.37	19.36	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	13.88	13.27	13.71	13.65	19.65	≤ 23.98	Pass
11ac-VHT20	MCS0	116	5580	13.86	13.86	13.67	13.51	19.75	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	14.04	13.52	13.29	13.45	19.60	≤ 23.98	Pass
11ac-VHT20	MCS0	144	5720	14.16	13.63	13.02	13.45	19.60	≤ 22.97	Pass
11ac-VHT20	MCS0	149	5745	23.70	23.50	22.30	23.00	29.18	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	24.16	24.07	22.72	23.75	29.73	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	23.43	23.18	21.58	23.08	28.90	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	Result
				Ant 0	Ant 1	Ant 2	Ant 3			
11ac-VHT40	MCS0	38	5190	18.04	17.70	16.35	17.43	23.44	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	23.94	24.24	22.32	23.54	29.59	≤ 30.00	Pass
11ac-VHT40	MCS0	54	5270	16.80	16.65	15.66	16.83	22.53	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	16.41	15.94	15.42	16.11	22.01	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	16.79	16.03	16.41	16.18	22.38	≤ 23.98	Pass
11ac-VHT40	MCS0	110	5550	17.20	16.74	16.86	16.58	22.87	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	16.77	16.72	16.27	16.41	22.57	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	16.72	16.58	15.75	16.10	22.33	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	23.59	23.54	22.04	23.24	29.17	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	23.69	23.65	22.26	23.39	29.31	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	17.24	16.88	15.91	16.65	22.72	≤ 30.00	Pass
11ac-VHT80	MCS0	58	5290	17.33	17.00	16.44	17.26	23.04	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	17.60	17.16	17.61	17.12	23.40	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	17.25	17.59	16.82	16.45	23.07	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	17.64	17.42	16.89	17.13	23.30	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	23.70	23.70	22.21	23.30	29.29	≤ 30.00	Pass
11ac-VHT160	MCS0	50	5250	16.86	16.43	15.76	16.79	22.50	≤ 23.98	Pass
11ac-VHT160	MCS0	114	5570	16.68	16.50	16.24	16.02	22.39	≤ 23.98	Pass
11ax-HE20	MCS0	36	5180	20.12	20.12	18.59	19.86	25.74	≤ 30.00	Pass
11ax-HE20	MCS0	40	5220	21.00	20.97	19.39	20.72	26.59	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	20.71	20.74	19.18	20.41	26.32	≤ 30.00	Pass
11ax-HE20	MCS0	52	5260	13.89	13.55	12.63	13.96	19.56	≤ 23.98	Pass
11ax-HE20	MCS0	60	5300	13.92	13.53	13.09	13.83	19.63	≤ 23.98	Pass
11ax-HE20	MCS0	64	5320	14.02	13.67	13.21	13.96	19.75	≤ 23.98	Pass
11ax-HE20	MCS0	100	5500	13.76	13.48	13.13	13.60	19.52	≤ 23.98	Pass
11ax-HE20	MCS0	116	5580	13.67	13.66	13.53	13.61	19.64	≤ 23.98	Pass
11ax-HE20	MCS0	140	5700	14.01	13.66	13.09	13.43	19.58	≤ 23.98	Pass
11ax-HE20	MCS0	144	5720	14.05	13.86	12.94	13.38	19.60	≤ 22.93	Pass
11ax-HE20	MCS0	149	5745	23.63	23.72	22.21	23.20	29.25	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	23.62	23.62	22.07	23.25	29.20	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	24.20	24.04	22.24	23.18	29.50	≤ 30.00	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	Result
				Ant 0	Ant 1	Ant 2	Ant 3			
11ax-HE40	MCS0	38	5190	18.16	18.01	16.14	17.66	23.58	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	23.68	23.76	21.91	23.17	29.21	≤ 30.00	Pass
11ax-HE40	MCS0	54	5270	16.92	16.85	15.78	17.03	22.69	≤ 23.98	Pass
11ax-HE40	MCS0	62	5310	16.60	16.11	15.52	16.20	22.15	≤ 23.98	Pass
11ax-HE40	MCS0	102	5510	17.03	16.62	16.74	16.31	22.70	≤ 23.98	Pass
11ax-HE40	MCS0	110	5550	17.14	16.75	17.12	16.70	22.95	≤ 23.98	Pass
11ax-HE40	MCS0	134	5670	16.72	16.80	16.38	16.51	22.63	≤ 23.98	Pass
11ax-HE40	MCS0	142	5710	16.75	16.73	15.88	16.16	22.42	≤ 23.98	Pass
11ax-HE40	MCS0	151	5755	23.82	23.90	22.43	23.31	29.42	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	23.65	23.55	22.14	23.22	29.20	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	17.57	17.36	16.17	16.98	23.07	≤ 30.00	Pass
11ax-HE80	MCS0	58	5290	17.35	17.03	16.23	17.22	23.00	≤ 23.98	Pass
11ax-HE80	MCS0	106	5530	17.80	17.35	17.62	17.35	23.55	≤ 23.98	Pass
11ax-HE80	MCS0	122	5610	17.76	17.80	17.50	17.60	23.69	≤ 23.98	Pass
11ax-HE80	MCS0	138	5690	17.82	17.70	17.21	16.99	23.46	≤ 23.98	Pass
11ax-HE80	MCS0	155	5775	22.46	22.41	20.88	22.07	28.02	≤ 30.00	Pass
11ax-HE160	MCS0	50	5250	17.02	16.86	16.00	16.77	22.70	≤ 23.98	Pass
11ax-HE160	MCS0	114	5570	17.31	17.31	16.34	16.35	22.87	≤ 23.98	Pass

Note 1:

The Total Average Power (dBm) =  $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$ .

Note 2:

For 5250- 5350MHz and 5470 - 5725MHz Band: Average Power Limit (dBm) = 23.98 dBm.

For 5150 - 5250MHz and 5725 - 5850MHz Bands: Average Power Limit (dBm) = 30 dBm.

For 802.11a Ch144 (5720MHz), Average Power Limit (dBm) =  $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) = 22.72$  dBm.

For 802.11ac Ch144 (5720MHz), Average Power Limit (dBm) =  $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) = 22.97$  dBm.

For 802.11ax Ch144 (5720MHz), Average Power Limit (dBm) =  $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) = 22.93$  dBm.

Product	AX5400 Multi-Gigabit Wi-Fi 6 Router	Test Engineer	Xuan Yu
Test Site	SR6	Test Date	2023/08/03
Test Mode	Beamforming Mode		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	Result
				Ant 0	Ant 1	Ant 2	Ant 3			
11ac-VHT20	MCS0	36	5180	20.72	20.48	19.16	20.25	26.21	≤ 28.07	Pass
11ac-VHT20	MCS0	40	5220	20.55	20.44	19.11	20.11	26.11	≤ 28.07	Pass
11ac-VHT20	MCS0	48	5240	20.20	20.23	18.85	19.72	25.81	≤ 28.07	Pass
11ac-VHT20	MCS0	52	5260	14.52	14.05	13.28	14.33	20.09	≤ 21.69	Pass
11ac-VHT20	MCS0	60	5300	14.04	13.60	13.28	13.73	19.69	≤ 21.69	Pass
11ac-VHT20	MCS0	64	5320	13.69	13.36	12.88	13.37	19.36	≤ 21.69	Pass
11ac-VHT20	MCS0	100	5500	13.88	13.27	13.71	13.65	19.65	≤ 21.46	Pass
11ac-VHT20	MCS0	116	5580	13.86	13.86	13.67	13.51	19.75	≤ 21.46	Pass
11ac-VHT20	MCS0	140	5700	14.04	13.52	13.29	13.45	19.60	≤ 21.46	Pass
11ac-VHT20	MCS0	144	5720	14.16	13.63	13.02	13.45	19.60	≤ 20.45	Pass
11ac-VHT20	MCS0	149	5745	21.30	21.27	19.82	20.65	26.82	≤ 27.48	Pass
11ac-VHT20	MCS0	157	5785	21.66	21.53	20.16	21.20	27.20	≤ 27.48	Pass
11ac-VHT20	MCS0	165	5825	21.50	21.23	19.52	21.03	26.90	≤ 27.48	Pass
11ac-VHT40	MCS0	38	5190	18.04	17.70	16.35	17.43	23.44	≤ 28.07	Pass
11ac-VHT40	MCS0	46	5230	21.63	21.60	20.04	21.14	27.17	≤ 28.07	Pass
11ac-VHT40	MCS0	54	5270	15.63	15.16	14.42	15.56	21.24	≤ 21.69	Pass
11ac-VHT40	MCS0	62	5310	15.31	15.00	14.54	15.26	21.06	≤ 21.69	Pass
11ac-VHT40	MCS0	102	5510	14.51	14.02	14.60	14.52	20.44	≤ 21.46	Pass
11ac-VHT40	MCS0	110	5550	14.64	14.27	14.60	14.52	20.53	≤ 21.46	Pass
11ac-VHT40	MCS0	134	5670	14.86	14.80	14.34	14.72	20.71	≤ 21.46	Pass
11ac-VHT40	MCS0	142	5710	14.87	14.72	13.95	14.38	20.51	≤ 21.46	Pass
11ac-VHT40	MCS0	151	5755	21.59	21.53	19.87	21.00	27.07	≤ 27.48	Pass
11ac-VHT40	MCS0	159	5795	21.15	21.10	19.54	20.91	26.74	≤ 27.48	Pass
11ac-VHT80	MCS0	42	5210	17.24	16.88	15.91	16.65	22.72	≤ 28.07	Pass
11ac-VHT80	MCS0	58	5290	15.16	14.75	14.12	15.02	20.80	≤ 21.69	Pass
11ac-VHT80	MCS0	106	5530	14.71	14.17	14.61	14.33	20.48	≤ 21.46	Pass
11ac-VHT80	MCS0	122	5610	14.76	14.65	14.40	14.31	20.55	≤ 21.46	Pass
11ac-VHT80	MCS0	138	5690	14.61	14.44	14.05	14.29	20.37	≤ 21.46	Pass
11ac-VHT80	MCS0	155	5775	21.12	21.11	19.55	20.72	26.69	≤ 27.48	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	Result
				Ant 0	Ant 1	Ant 2	Ant 3			
11ac-VHT160	MCS0	50	5250	15.14	14.72	14.11	14.91	20.76	≤ 21.69	Pass
11ac-VHT160	MCS0	114	5570	15.17	15.15	14.72	14.68	20.96	≤ 21.46	Pass
11ax-HE20	MCS0	36	5180	20.12	20.12	18.59	19.86	25.74	≤ 28.07	Pass
11ax-HE20	MCS0	40	5220	21.00	20.97	19.39	20.72	26.59	≤ 28.07	Pass
11ax-HE20	MCS0	48	5240	20.71	20.74	19.18	20.41	26.32	≤ 28.07	Pass
11ax-HE20	MCS0	52	5260	13.89	13.55	12.63	13.96	19.56	≤ 21.69	Pass
11ax-HE20	MCS0	60	5300	13.92	13.53	13.09	13.83	19.63	≤ 21.69	Pass
11ax-HE20	MCS0	64	5320	14.02	13.67	13.21	13.96	19.75	≤ 21.69	Pass
11ax-HE20	MCS0	100	5500	13.76	13.48	13.13	13.60	19.52	≤ 21.46	Pass
11ax-HE20	MCS0	116	5580	13.67	13.66	13.53	13.61	19.64	≤ 21.46	Pass
11ax-HE20	MCS0	140	5700	14.01	13.66	13.09	13.43	19.58	≤ 21.46	Pass
11ax-HE20	MCS0	144	5720	14.05	13.86	12.94	13.38	19.60	≤ 20.41	Pass
11ax-HE20	MCS0	149	5745	21.26	21.25	19.82	20.73	26.82	≤ 27.48	Pass
11ax-HE20	MCS0	157	5785	21.65	21.69	20.10	21.24	27.24	≤ 27.48	Pass
11ax-HE20	MCS0	165	5825	21.35	21.33	19.53	20.86	26.85	≤ 27.48	Pass
11ax-HE40	MCS0	38	5190	18.17	17.93	16.58	17.56	23.62	≤ 28.07	Pass
11ax-HE40	MCS0	46	5230	21.94	22.21	20.43	21.78	27.66	≤ 28.07	Pass
11ax-HE40	MCS0	54	5270	15.62	15.26	14.45	15.72	21.31	≤ 21.69	Pass
11ax-HE40	MCS0	62	5310	15.52	15.13	14.65	15.33	21.19	≤ 21.69	Pass
11ax-HE40	MCS0	102	5510	14.53	14.18	14.55	14.74	20.53	≤ 21.46	Pass
11ax-HE40	MCS0	110	5550	14.72	14.45	14.68	14.67	20.65	≤ 21.46	Pass
11ax-HE40	MCS0	134	5670	14.91	14.80	14.45	14.86	20.78	≤ 21.46	Pass
11ax-HE40	MCS0	142	5710	15.01	14.84	14.14	14.47	20.65	≤ 21.46	Pass
11ax-HE40	MCS0	151	5755	21.56	21.56	19.94	20.99	27.08	≤ 27.48	Pass
11ax-HE40	MCS0	159	5795	21.32	21.17	19.55	20.92	26.81	≤ 27.48	Pass
11ax-HE80	MCS0	42	5210	17.57	17.36	16.17	16.98	23.07	≤ 28.07	Pass
11ax-HE80	MCS0	58	5290	15.30	15.02	14.38	15.40	21.06	≤ 21.69	Pass
11ax-HE80	MCS0	106	5530	15.24	14.91	15.18	15.21	21.16	≤ 21.46	Pass
11ax-HE80	MCS0	122	5610	15.11	15.02	14.55	14.63	20.85	≤ 21.46	Pass
11ax-HE80	MCS0	138	5690	15.08	14.75	14.32	14.56	20.71	≤ 21.46	Pass
11ax-HE80	MCS0	155	5775	20.97	20.86	19.41	20.48	26.49	≤ 27.48	Pass
11ax-HE160	MCS0	50	5250	15.58	15.26	14.60	15.65	21.31	≤ 21.69	Pass
11ax-HE160	MCS0	114	5570	14.97	15.03	14.47	14.56	20.79	≤ 21.46	Pass



## Note 1:

The Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$ .

## Note 2:

For 5125 - 5250MHz Band: Average Power Limit (dBm) =  $30 - (7.93 - 6) = 28.07\text{dBm}$

For 5250 - 5350MHz Band: Average Power Limit (dBm) =  $23.98 - (8.29 - 6) = 21.69\text{dBm}$ .

For 5470 - 5725MHz Band: Average Power Limit (dBm) =  $23.98 - (8.52 - 6) = 21.46\text{dBm}$ .

For 5725 - 5850MHz Band: Average Power Limit (dBm) =  $30 - (8.52 - 6) = 27.48\text{dBm}$ .

For 802.11ac Ch144 (5720MHz), Average Power Limit (dBm) =  $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) = 20.45\text{ dBm}$ .

For 802.11ax Ch144 (5720MHz), Average Power Limit (dBm) =  $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) = 20.41\text{ dBm}$ .

### 7.3. Radiated Spurious Emission Measurement

#### 7.3.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### 7.3.2. Test Procedure Used

KDB 789033 D02v02r01- Section II)G

#### 7.3.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 7.3.4. Test Setup

#### Below 1GHz Test Setup:

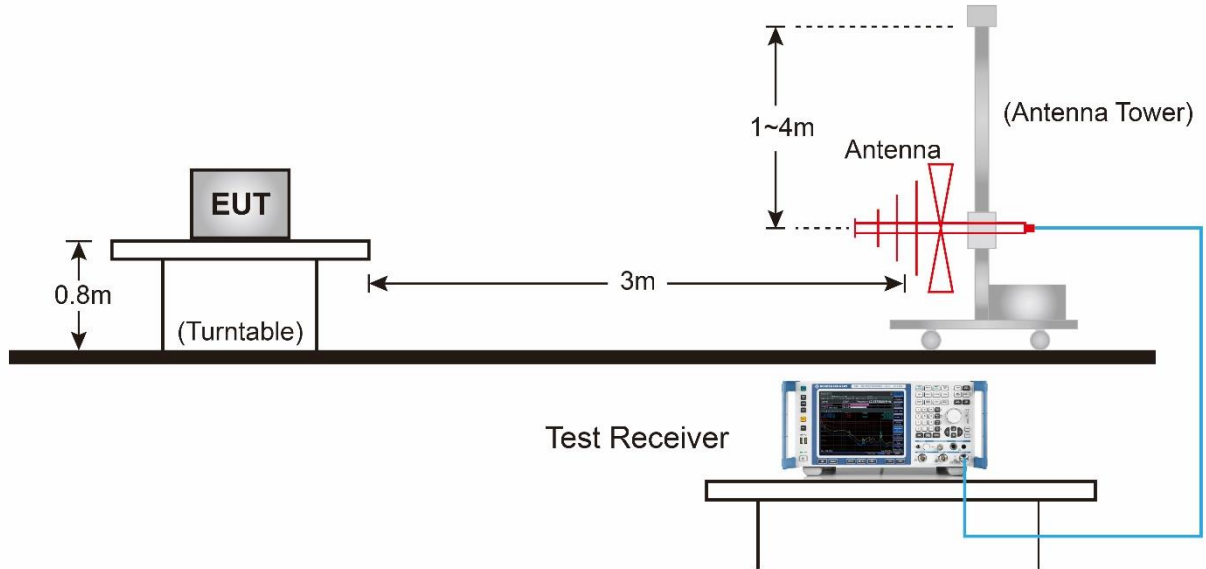


#### Above 1GHz Test Setup:

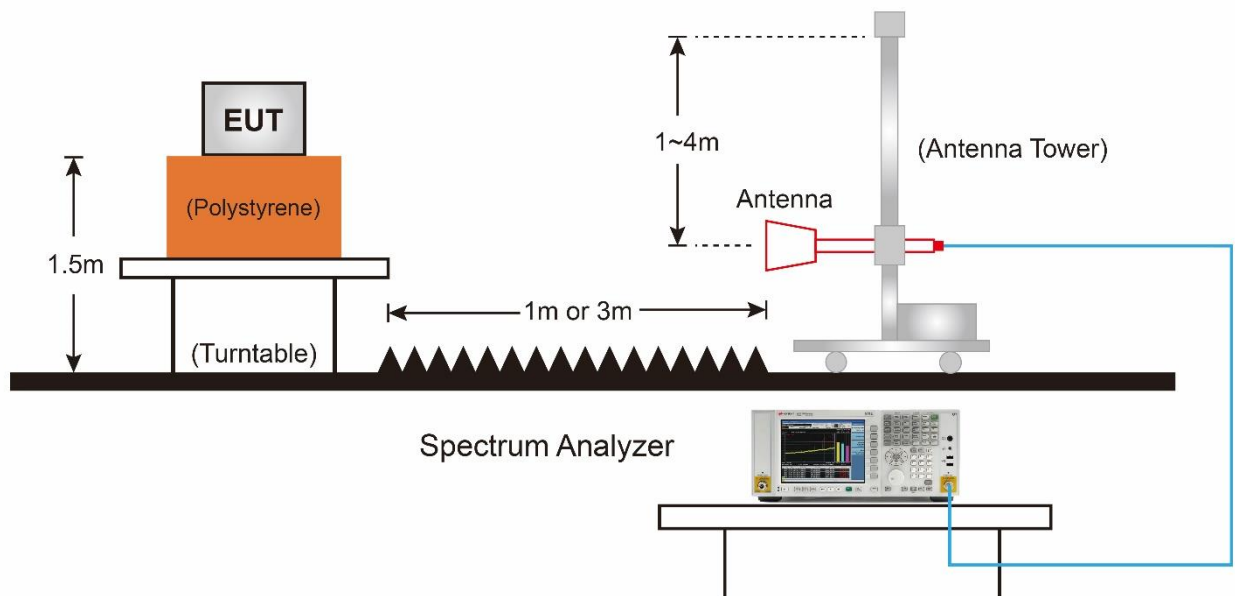

### 7.3.5. Test Result

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

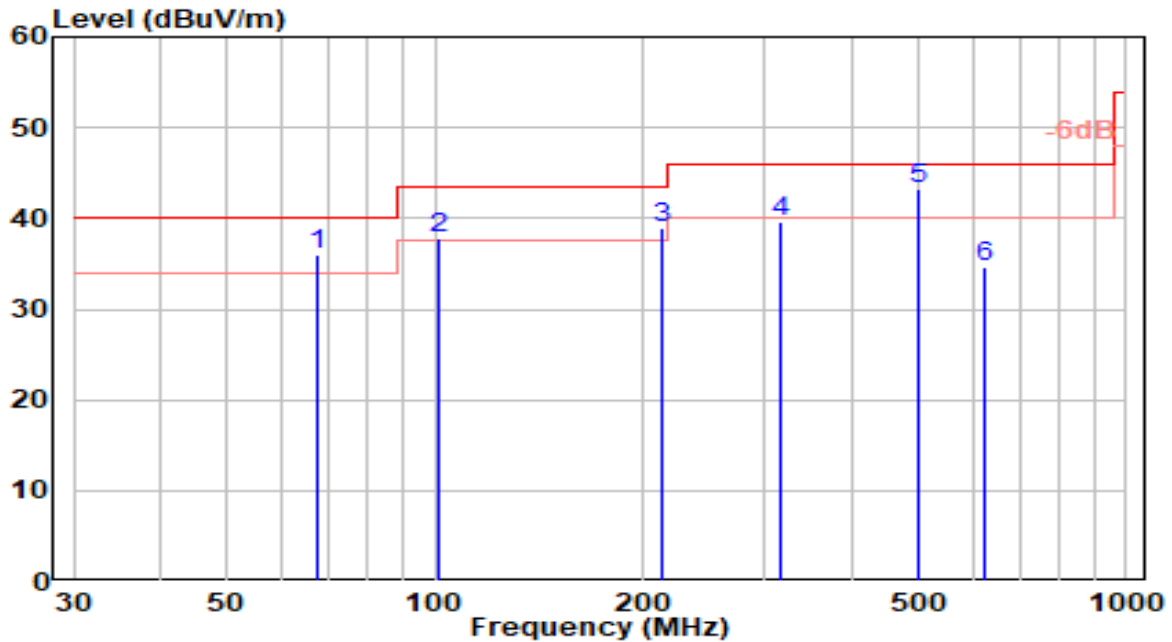


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	67.830	19.16	16.76	35.92	-4.08	40.00	200	360	Peak
2	100.810	19.07	18.79	37.86	-5.64	43.50	200	272	Peak
3	213.330	20.64	18.24	38.89	-4.61	43.50	150	196	Peak
4	315.180	18.20	21.43	39.63	-6.37	46.00	100	126	QP
5 *	500.450	18.00	25.23	43.23	-2.77	46.00	150	312	QP
6	625.580	7.38	27.33	34.71	-11.29	46.00	150	19	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

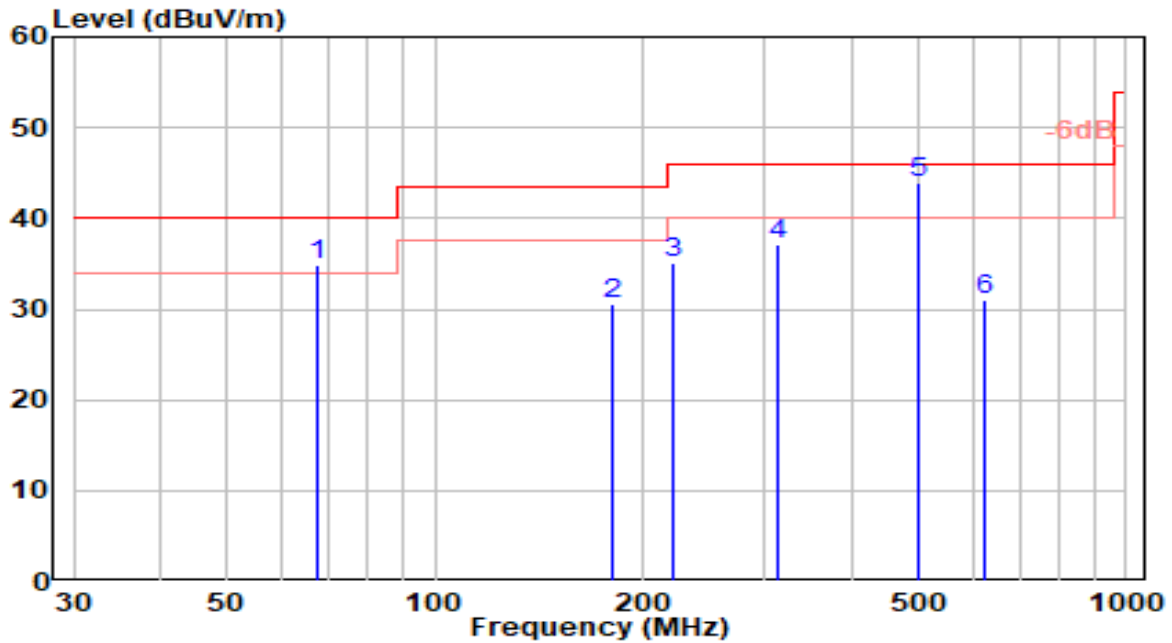


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	67.830	18.00	16.76	34.76	-5.24	40.00	100	360	QP
2	180.350	14.07	16.61	30.68	-12.82	43.50	150	316	Peak
3	221.090	16.48	18.73	35.20	-10.80	46.00	200	305	Peak
4	314.210	15.81	21.40	37.20	-8.80	46.00	150	232	Peak
5 *	500.450	18.80	25.23	44.03	-1.97	46.00	100	10	QP
6	625.580	3.62	27.33	30.95	-15.05	46.00	100	265	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

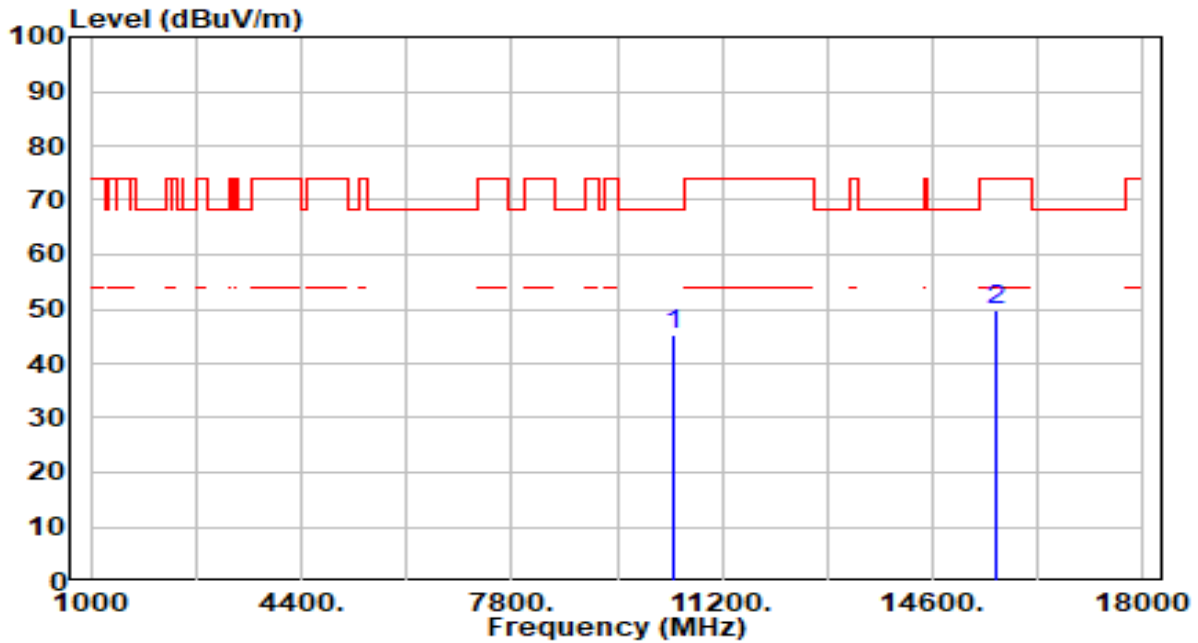


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	42.62	2.74	45.36	-22.84	68.20	200	156	Peak
2		45.25	4.59	49.84	-24.16	74.00	300	305	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

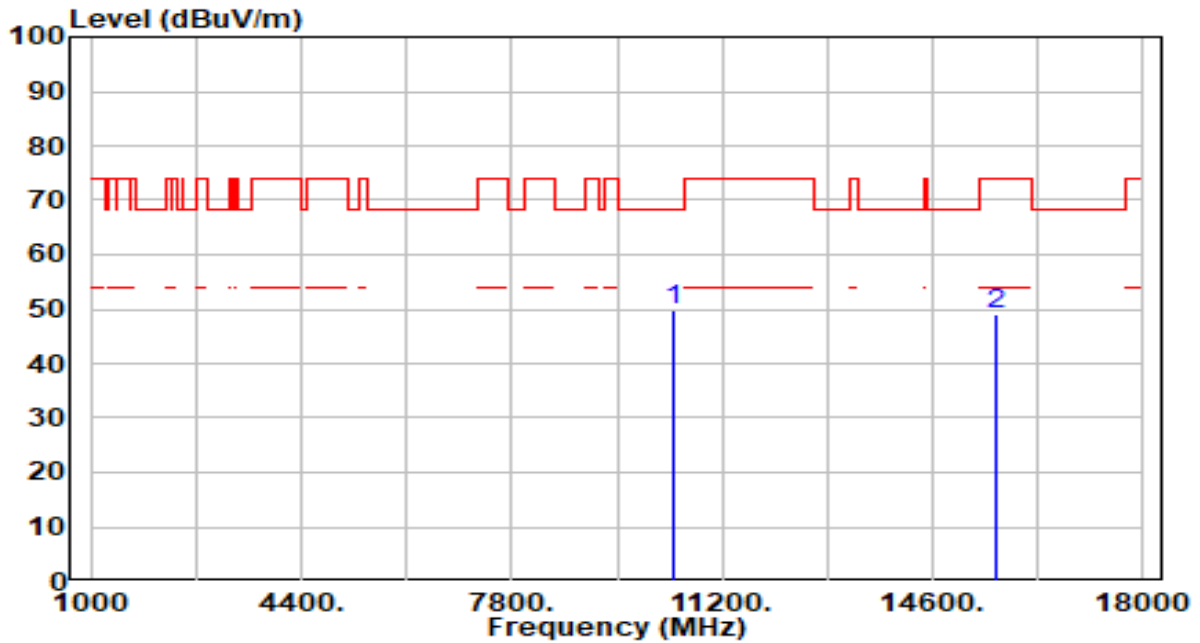


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	46.91	2.74	49.65	-18.55	68.20	153	360	Peak
2	15630.000	44.62	4.59	49.21	-24.79	74.00	200	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

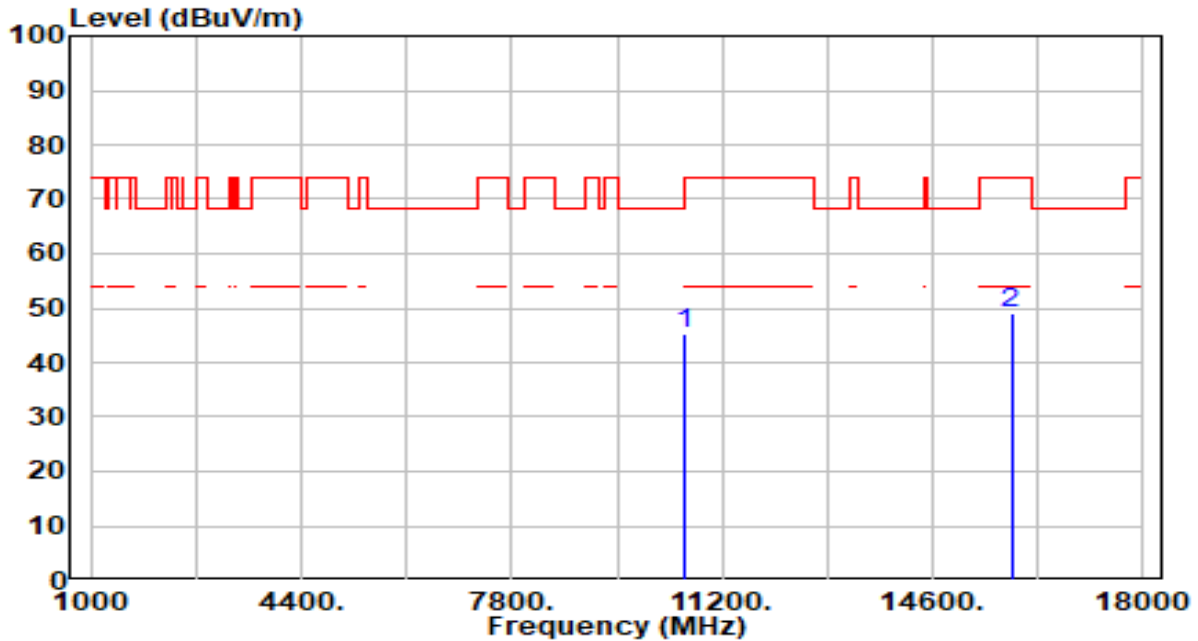


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	42.56	2.61	45.17	-23.03	68.20	200	116	Peak
2		43.99	5.11	49.09	-24.91	74.00	200	29	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

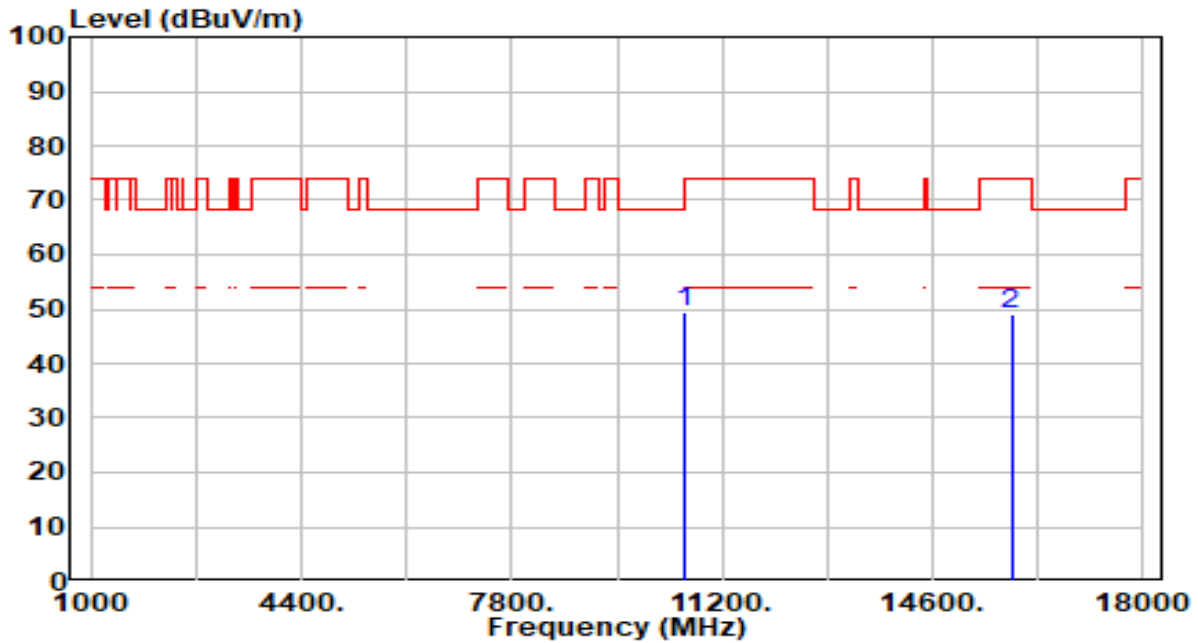


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	46.72	2.61	49.34	-18.86	68.20	200	5	Peak
2	15870.000	43.92	5.11	49.02	-24.98	74.00	200	135	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

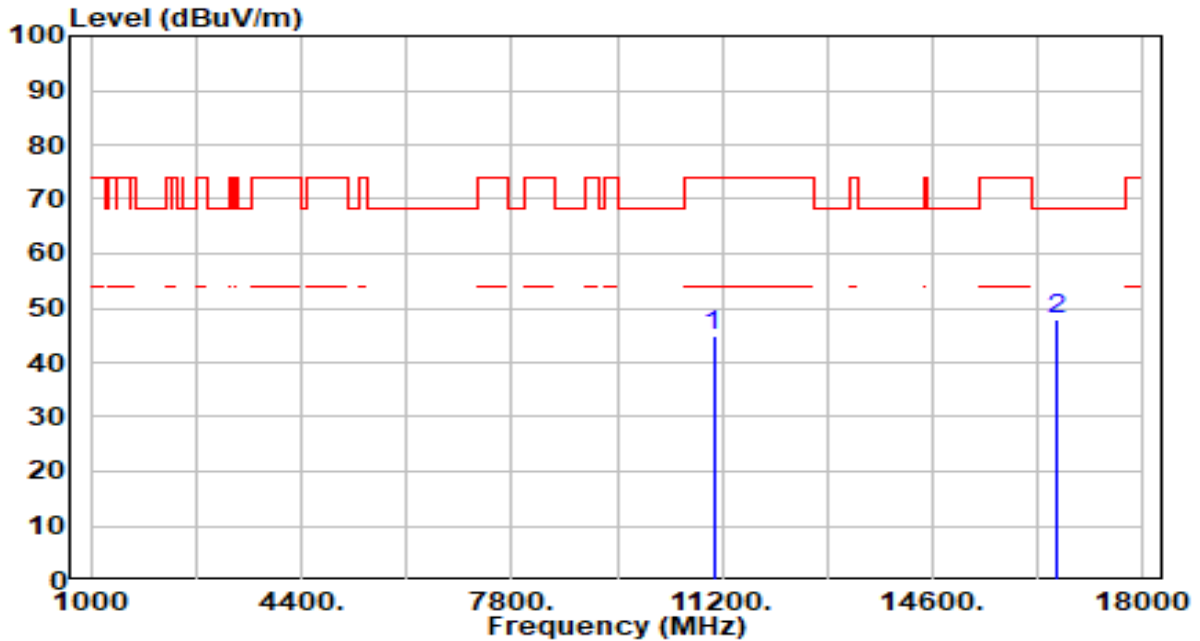


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	42.01	2.78	44.78	-29.22	74.00	200	108	Peak
2	* 16590.000	43.45	4.62	48.06	-20.14	68.20	200	337	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

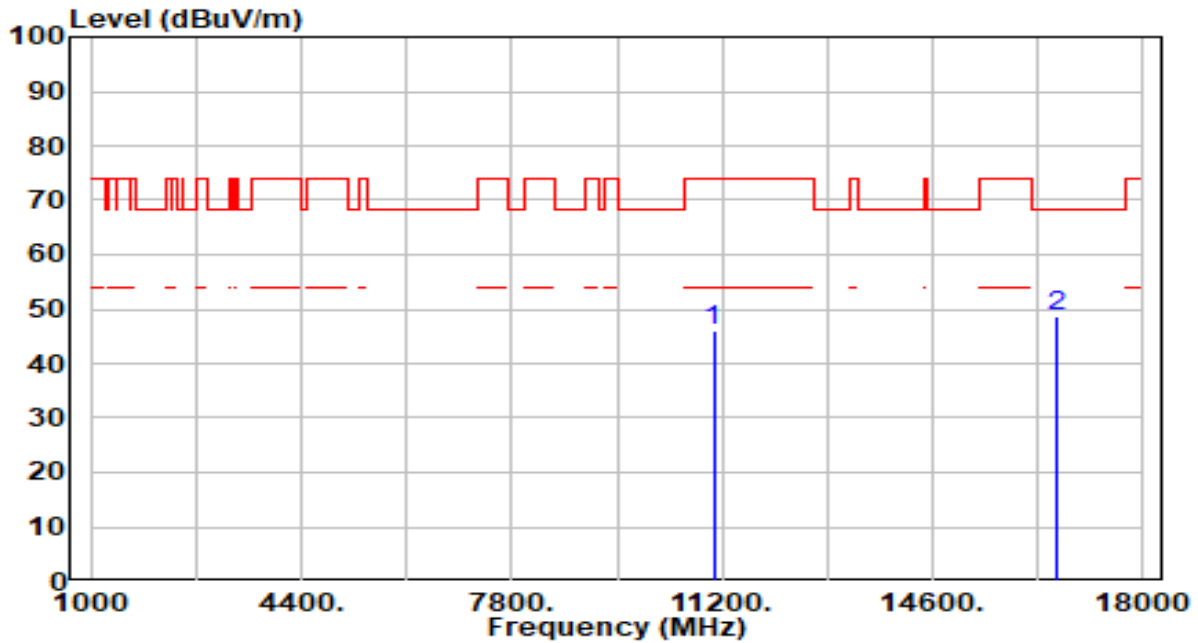


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	43.09	2.78	45.87	-28.13	74.00	200	33	Peak
2	* 16590.000	44.01	4.62	48.63	-19.57	68.20	200	18	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

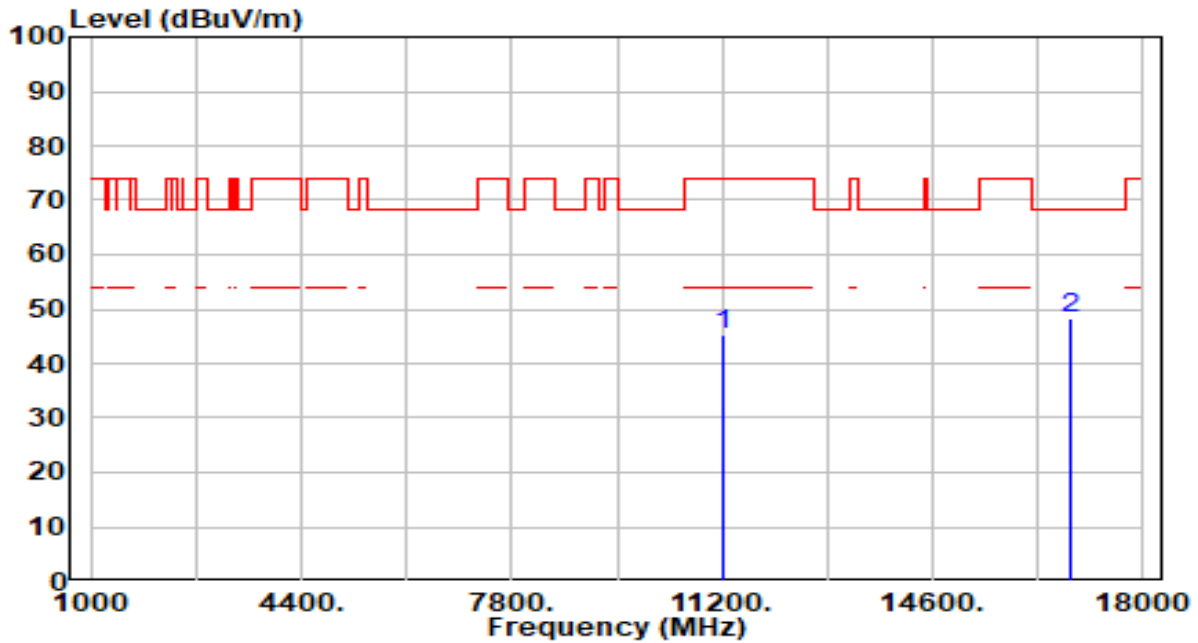


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	42.16	3.22	45.38	-28.62	74.00	200	73	Peak
2	* 16830.000	43.50	4.61	48.12	-20.08	68.20	200	163	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

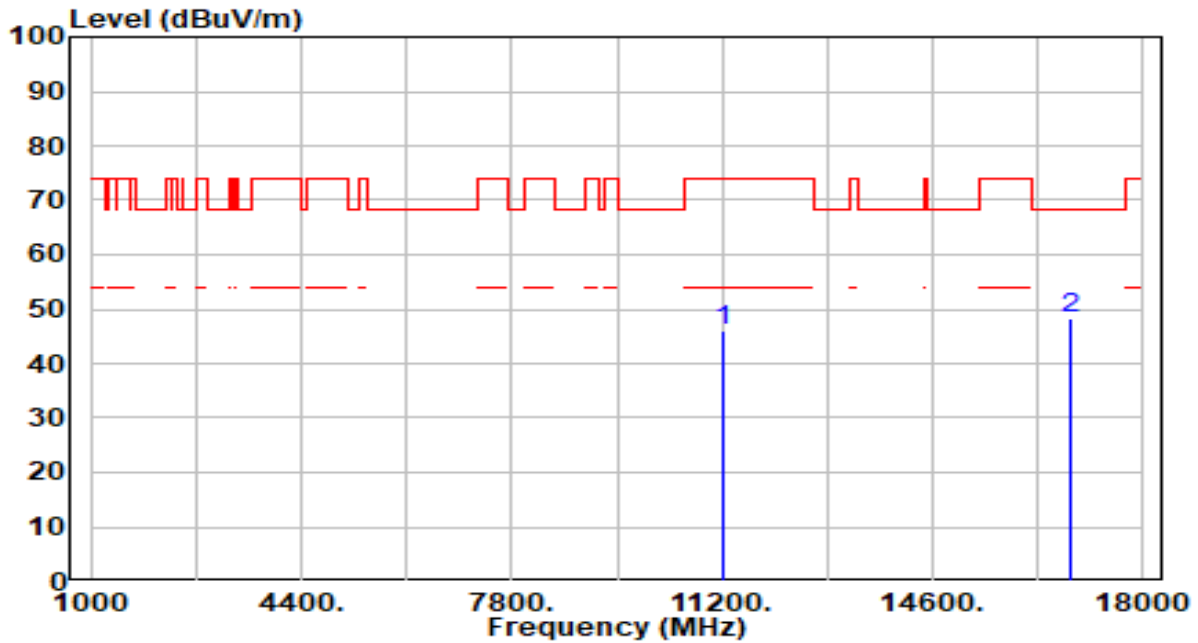


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	42.94	3.22	46.16	-27.84	74.00	200	198	Peak
2	* 16830.000	43.74	4.61	48.35	-19.85	68.20	200	283	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

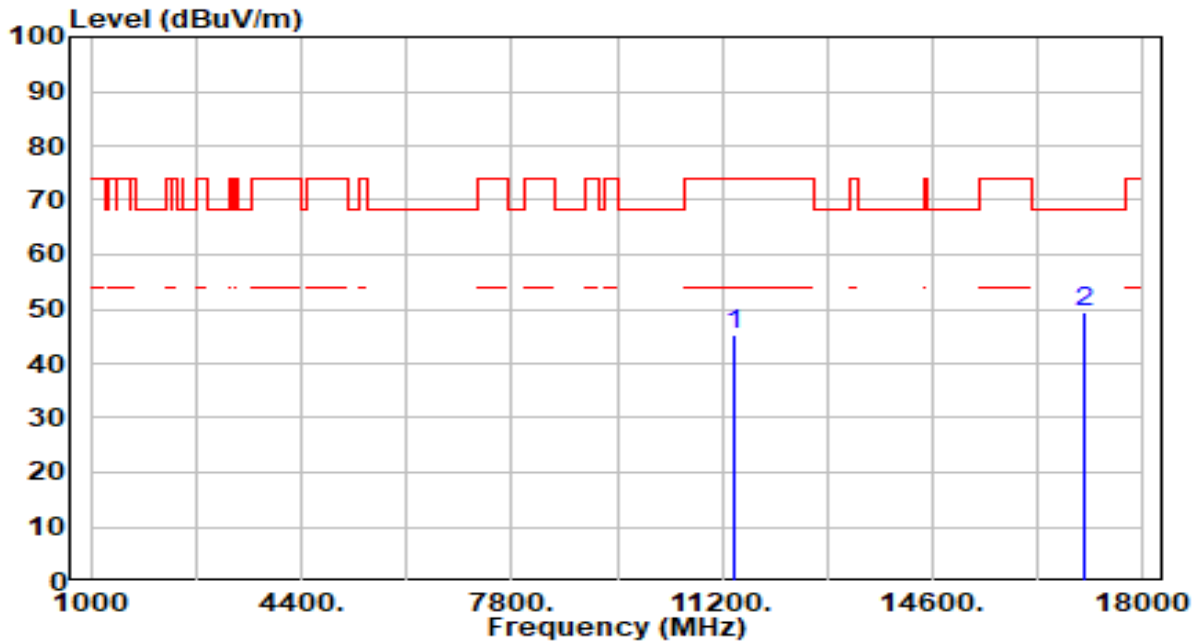


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.68	3.45	45.13	-28.87	74.00	200	302	Peak
2	* 17070.000	44.54	4.86	49.40	-18.80	68.20	200	294	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

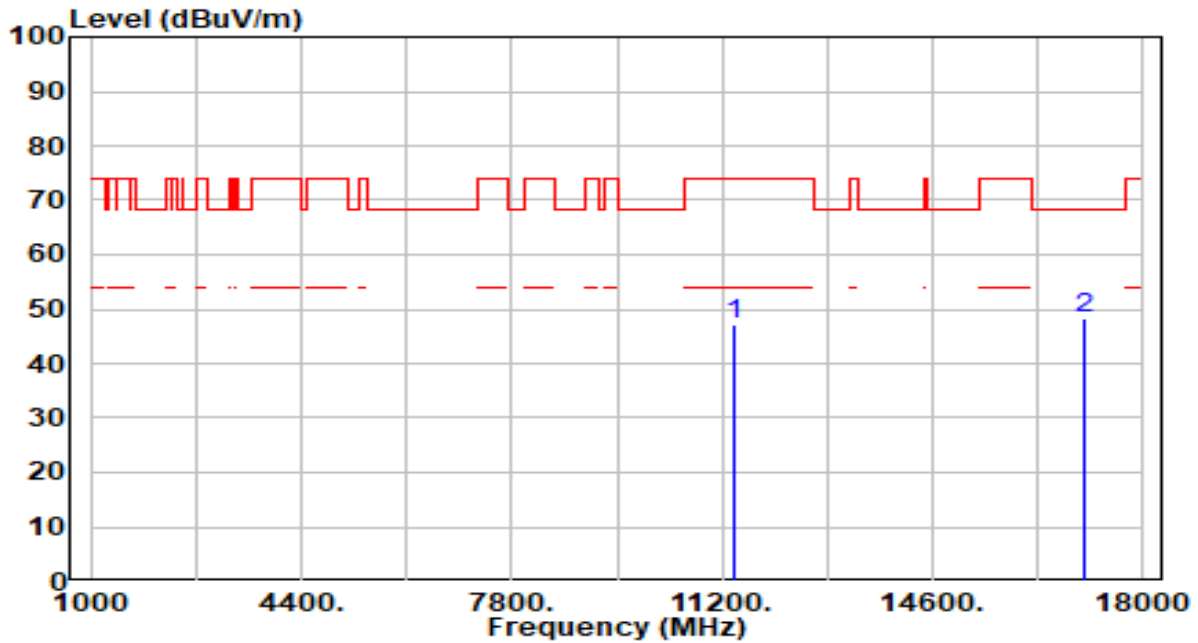


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	43.82	3.45	47.27	-26.73	74.00	200	7	Peak
2	* 17070.000	43.49	4.86	48.35	-19.85	68.20	200	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

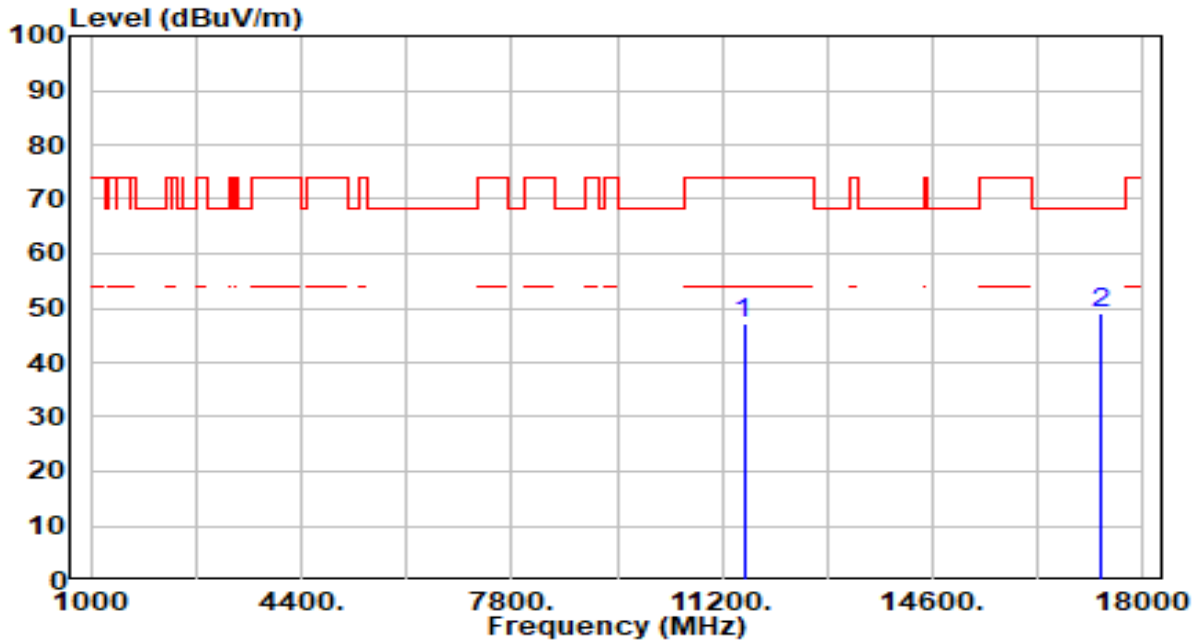


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	43.39	3.63	47.02	-26.98	74.00	200	53	Peak
2	* 17325.000	44.99	4.16	49.15	-19.05	68.20	200	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

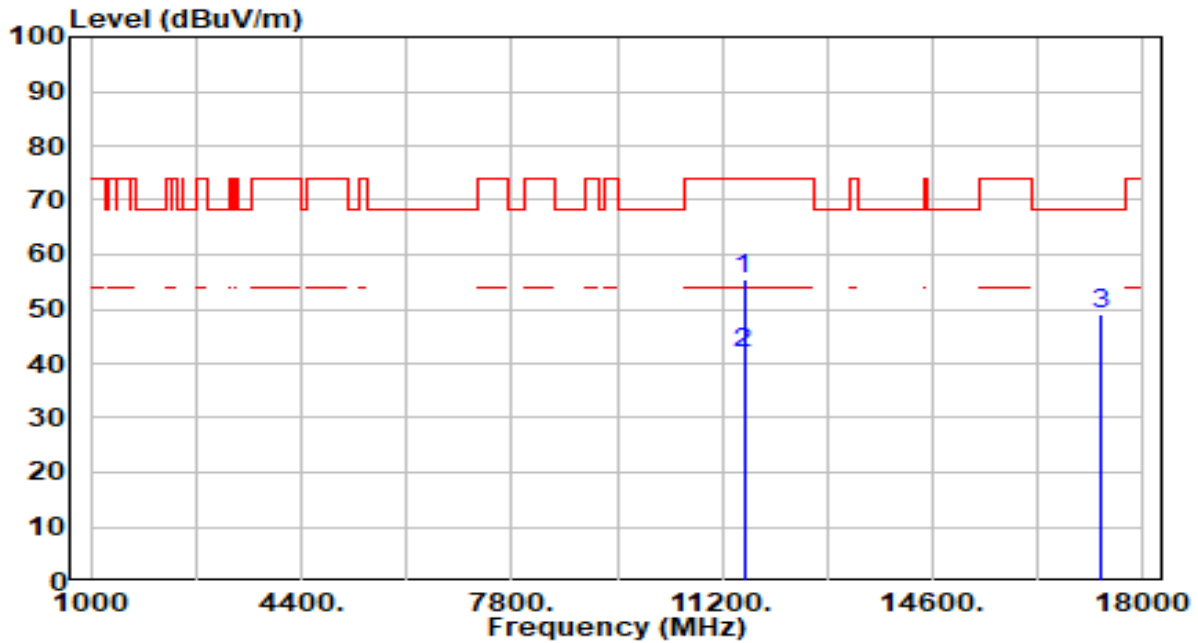


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	11550.000	51.81	3.63	55.44	-18.56	74.00	200	51	Peak
2	*	11550.000	38.25	3.63	41.88	-12.12	54.00	200	51	Average
3		17325.000	44.92	4.16	49.07	-19.13	68.20	200	154	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

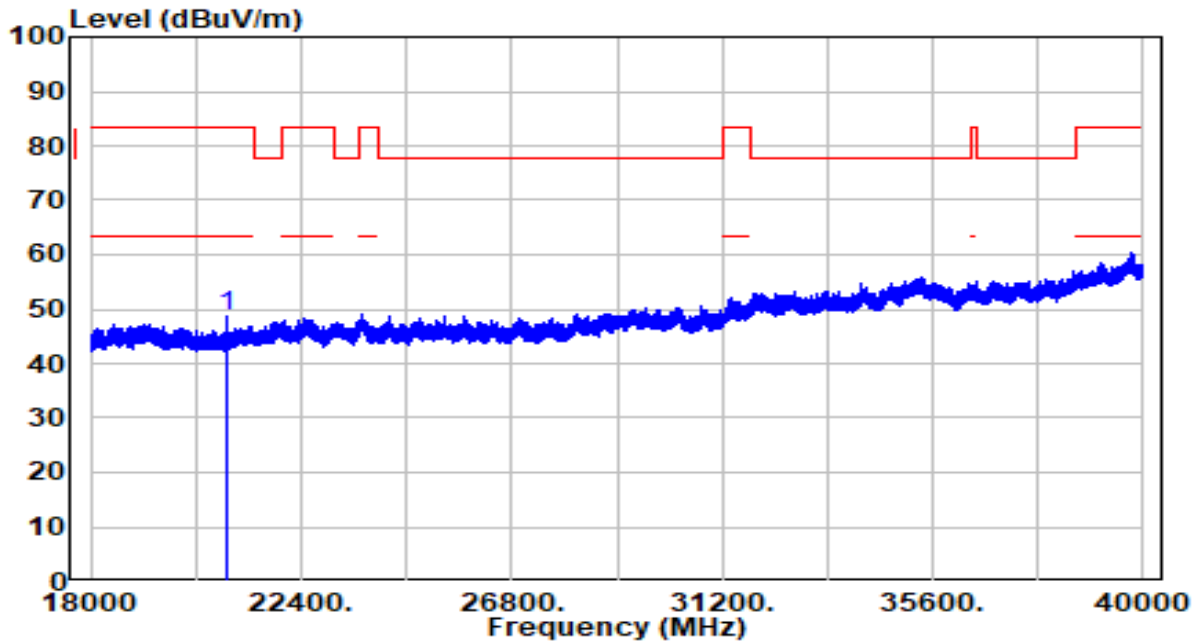


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	20839.380	37.80	10.81	48.62	-34.88	83.50	150	155	Peak

Note:

1. "\*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

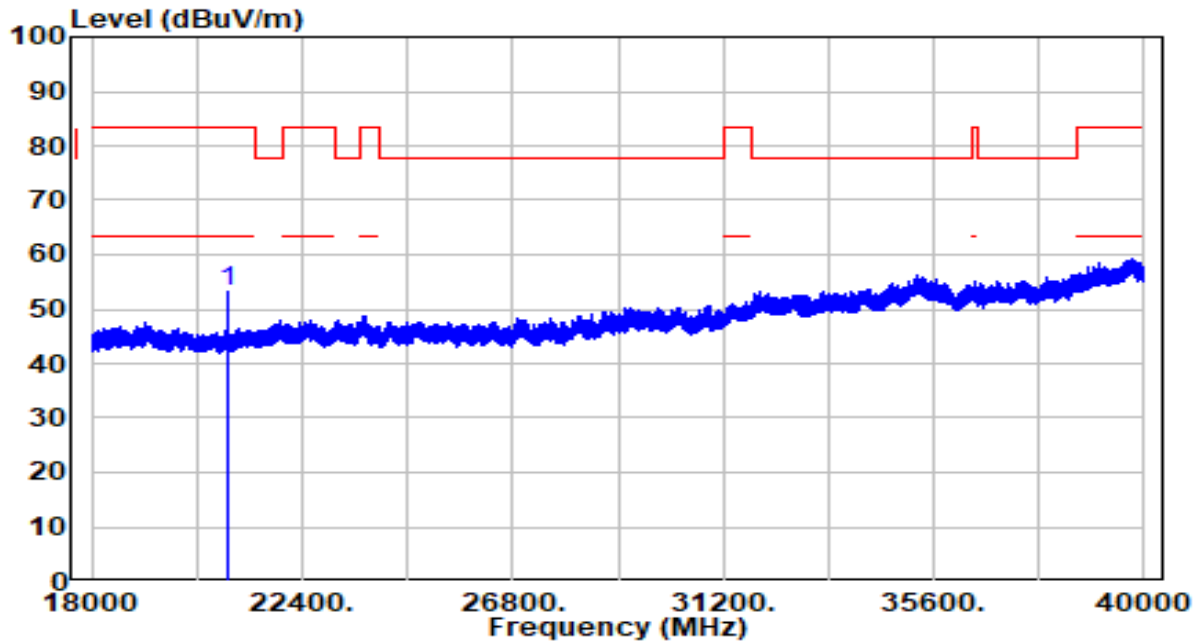

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	20839.380	42.37	10.81	53.18	-30.32	83.50	150	78	Peak

Note:

1. "\*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.4. Radiated Restricted Band Edge Measurement

### 7.4.1. Test Limit

#### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
<sup>1</sup> 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	( <sup>2</sup> )
13.36-13.41	--	--	--

#### **For 15.407(b) requirement:**

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing

linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**7.4.2. Test Procedure Used**

KDB 789033 D02v02r01- Section II) G

**7.4.3. Test Setting**


**Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set  $VBW \leq RBW/100$  (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ .
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

#### 7.4.4. Test Setup

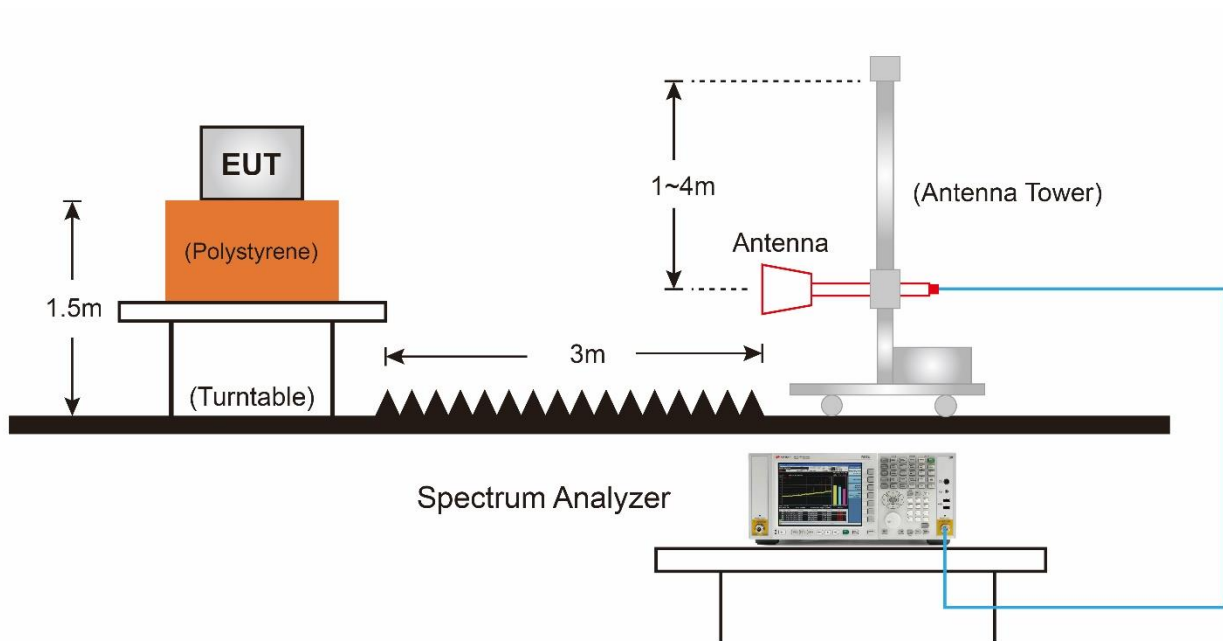

### 7.4.5. Test Result

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

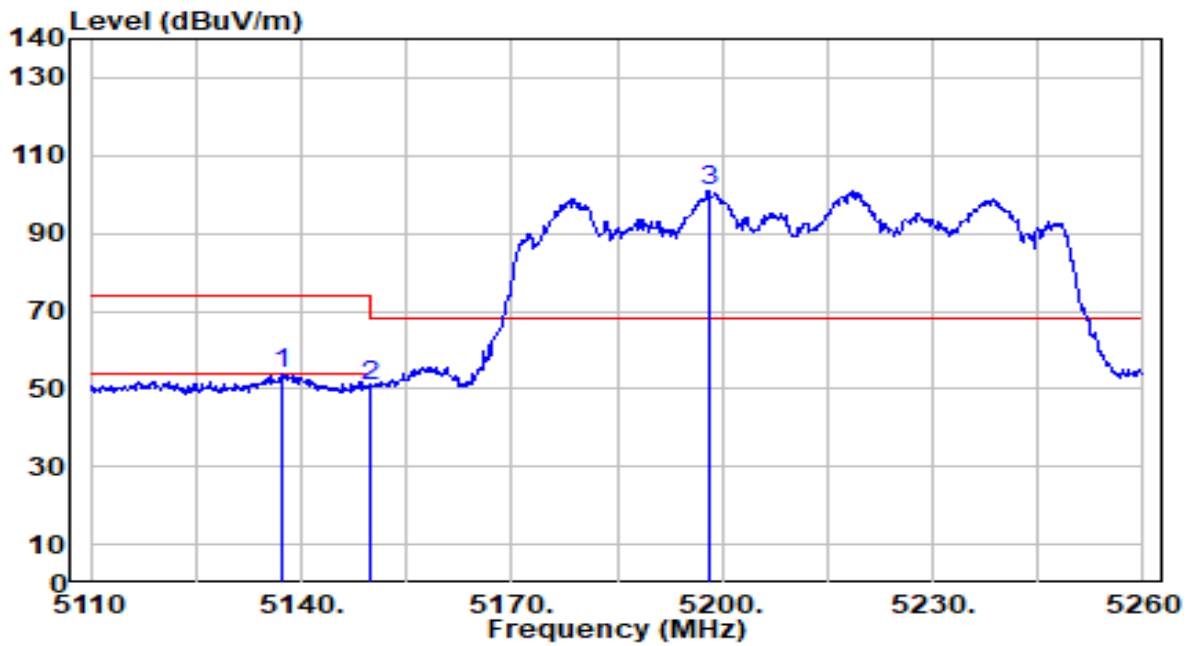


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5137.150	54.77	-0.71	54.06	-19.94	74.00	300	218	Peak
2	5150.000	51.62	-0.72	50.90	-23.10	74.00	300	218	Peak
3	5198.050	101.55	-0.74	100.80	N/A	N/A	300	218	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

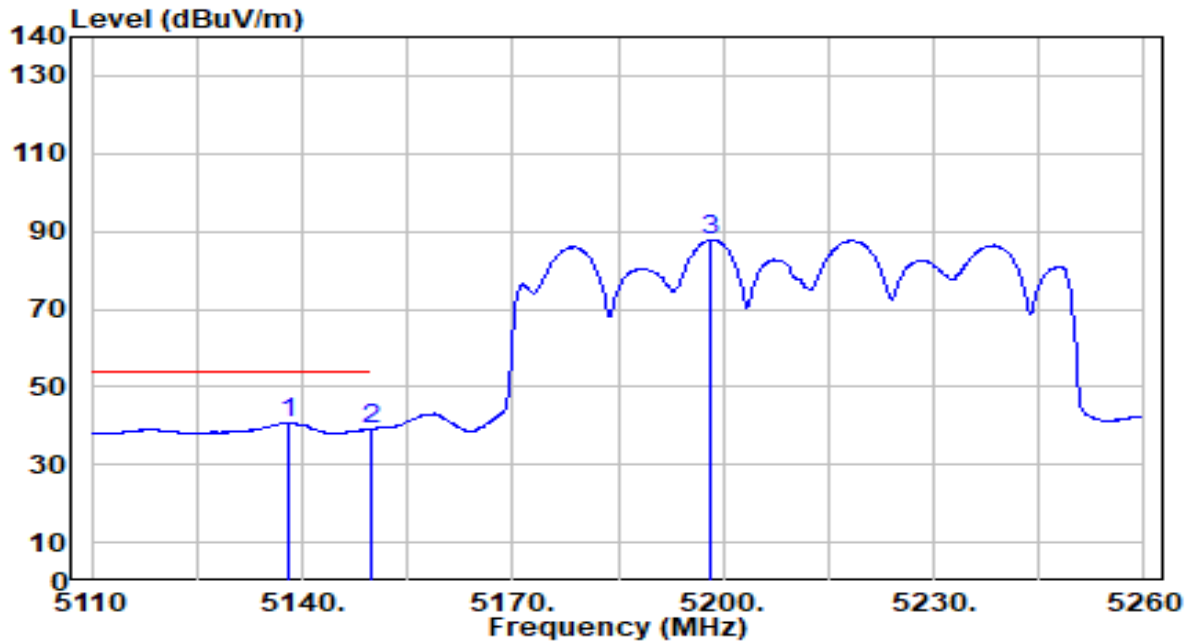


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5138.050	41.40	-0.71	40.68	-13.32	54.00	300	218	Average
2		5150.000	39.93	-0.72	39.21	-14.79	54.00	300	218	Average
3		5198.350	88.62	-0.74	87.88	N/A	N/A	300	218	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

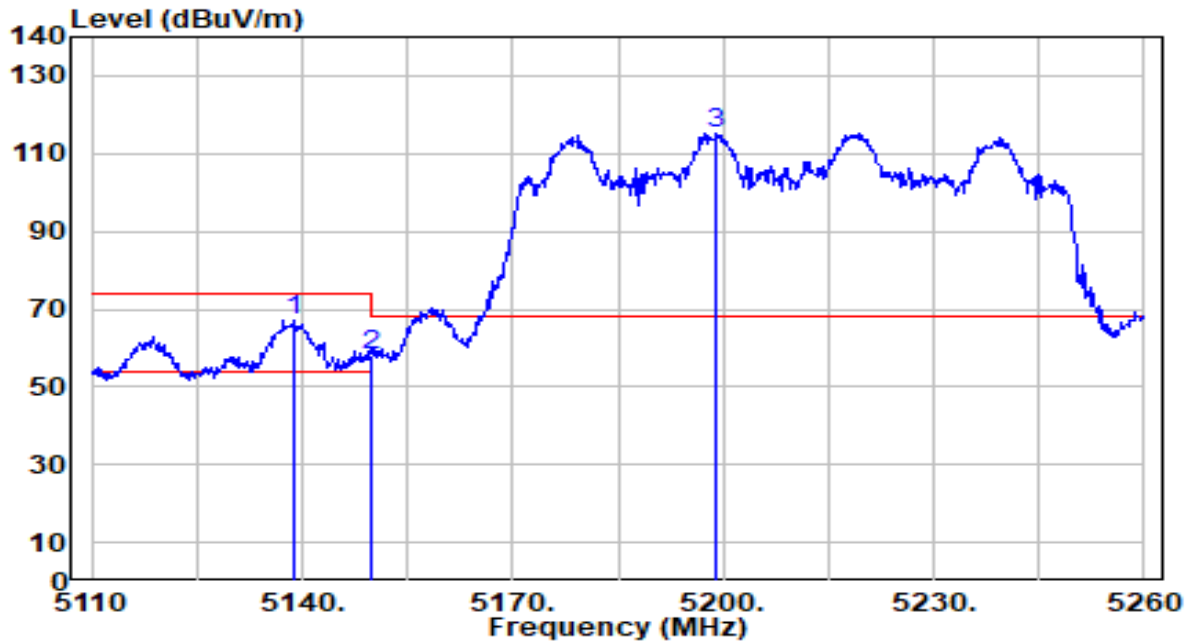


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5138.800	68.07	-0.71	67.35	-6.65	74.00	100	330	Peak
2		5150.000	58.88	-0.72	58.16	-15.84	74.00	100	330	Peak
3		5199.100	115.92	-0.74	115.17	N/A	N/A	100	330	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

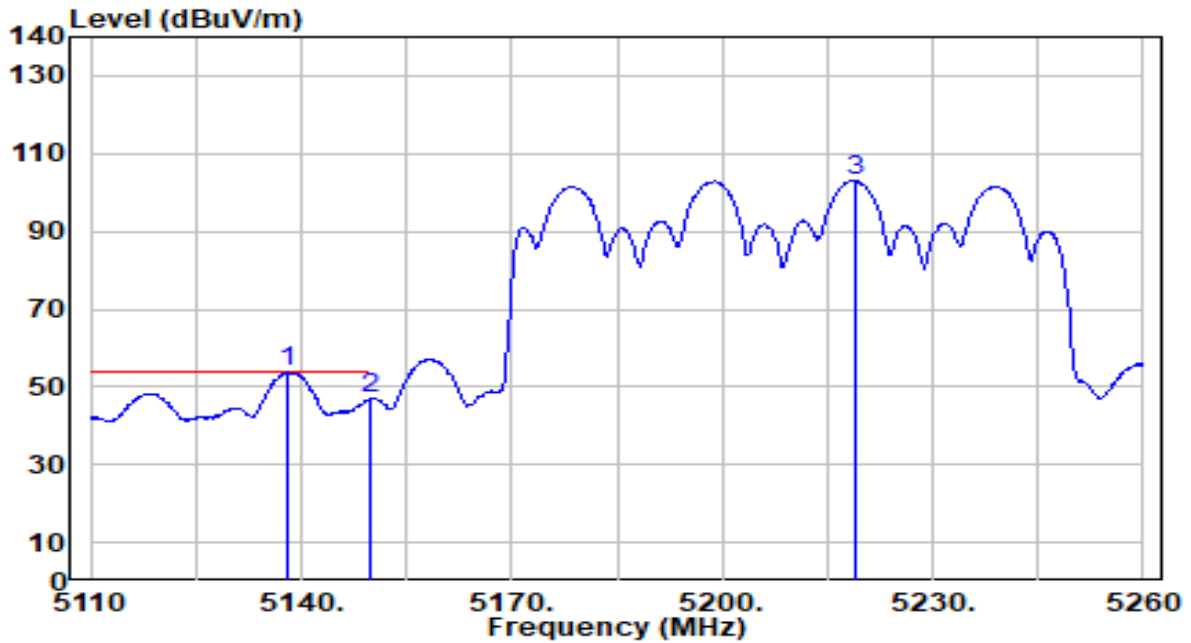


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	54.51	-0.71	53.80	-0.20	54.00	100	330	Average
2		47.78	-0.72	47.06	-6.94	54.00	100	330	Average
3		103.77	-0.77	103.00	N/A	N/A	100	330	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

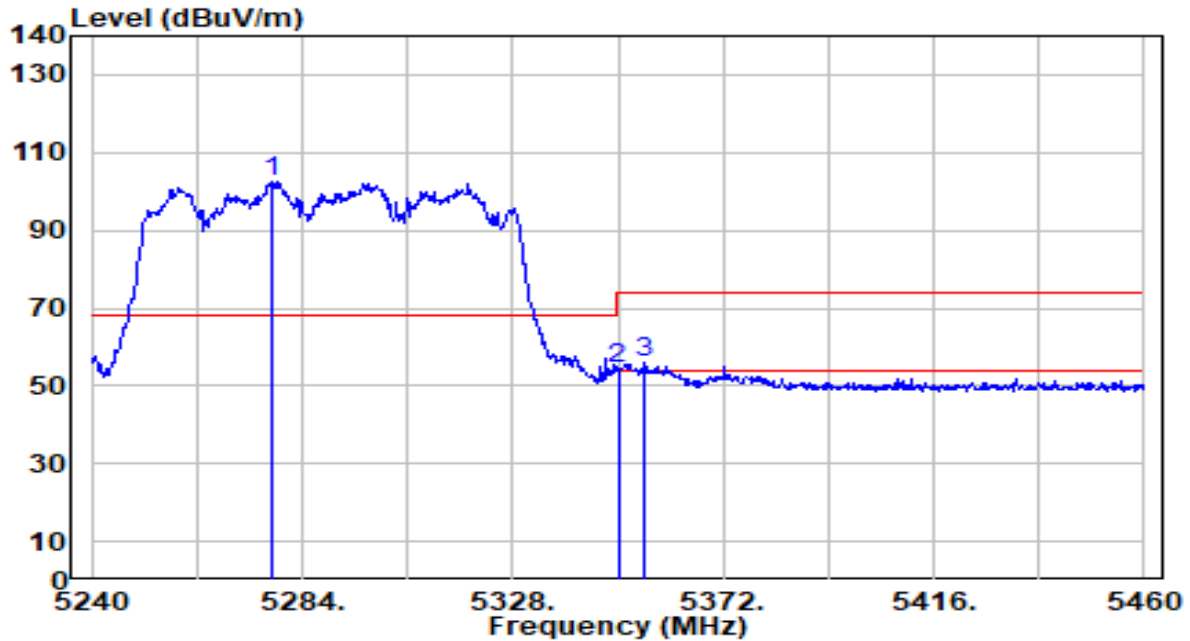


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5277.840	103.32	-0.86	102.46	N/A	N/A	288	216	Peak
2	5350.000	55.48	-0.97	54.51	-19.49	74.00	288	216	Peak
3	* 5355.720	56.84	-0.98	55.85	-18.15	74.00	288	216	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

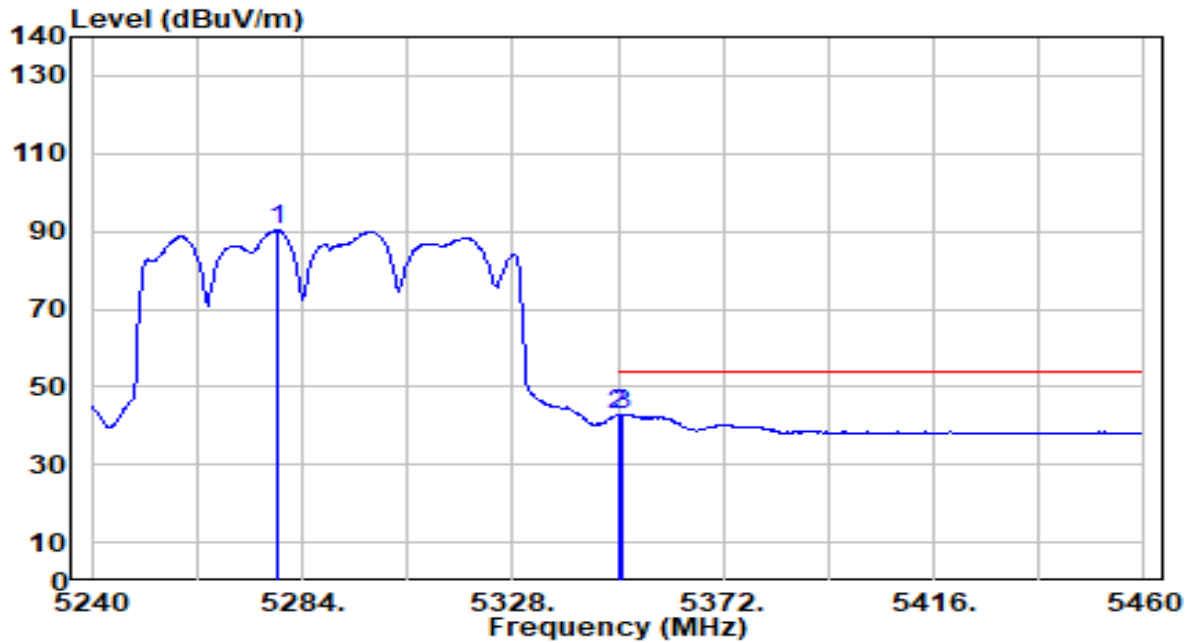


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.940	91.06	-0.86	90.19	N/A	N/A	288	216	Average
2	5350.000	43.61	-0.97	42.64	-11.36	54.00	288	216	Average
3	* 5350.880	43.87	-0.97	42.89	-11.11	54.00	288	216	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

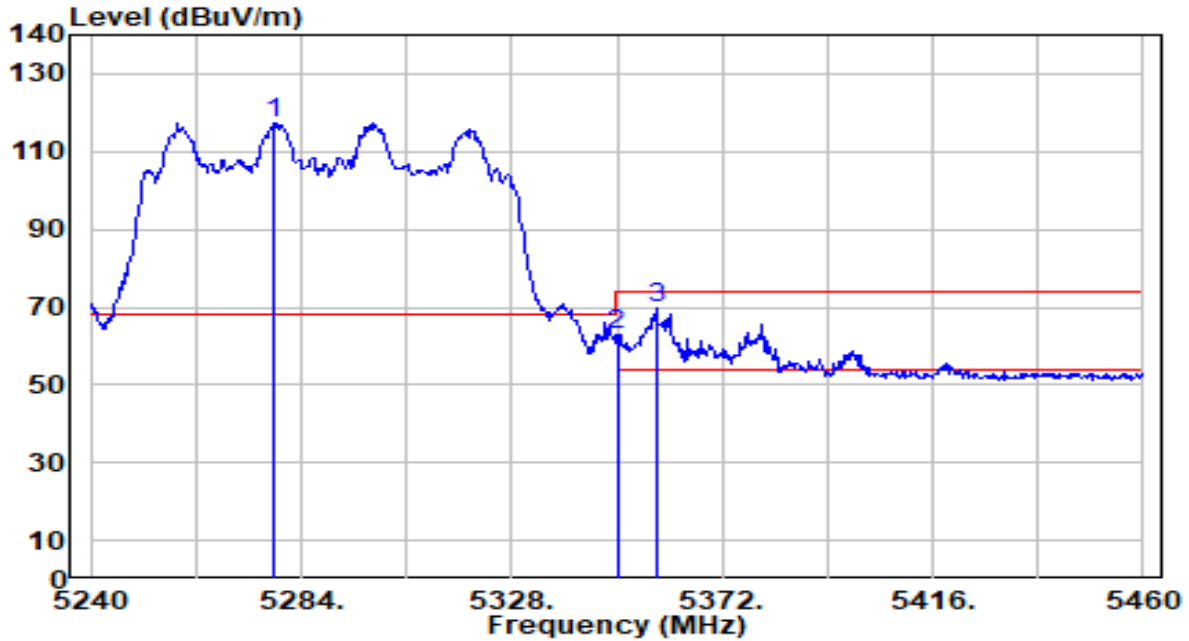


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.500	118.27	-0.86	117.40	N/A	N/A	100	331	Peak
2	5350.000	63.68	-0.97	62.71	-11.29	74.00	100	331	Peak
3	* 5358.140	70.61	-0.98	69.62	-4.38	74.00	100	331	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

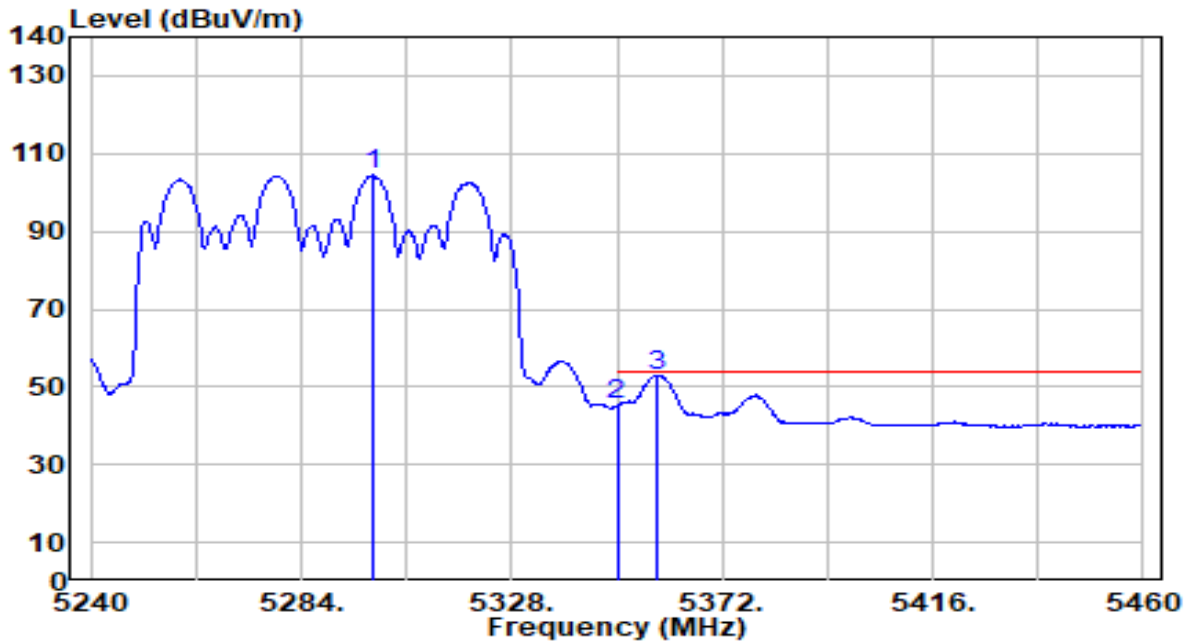


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.960	105.23	-0.89	104.34	N/A	N/A	100	331	Average
2	5350.000	46.20	-0.97	45.23	-8.77	54.00	100	331	Average
3	* 5358.360	53.86	-0.98	52.88	-1.12	54.00	100	331	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

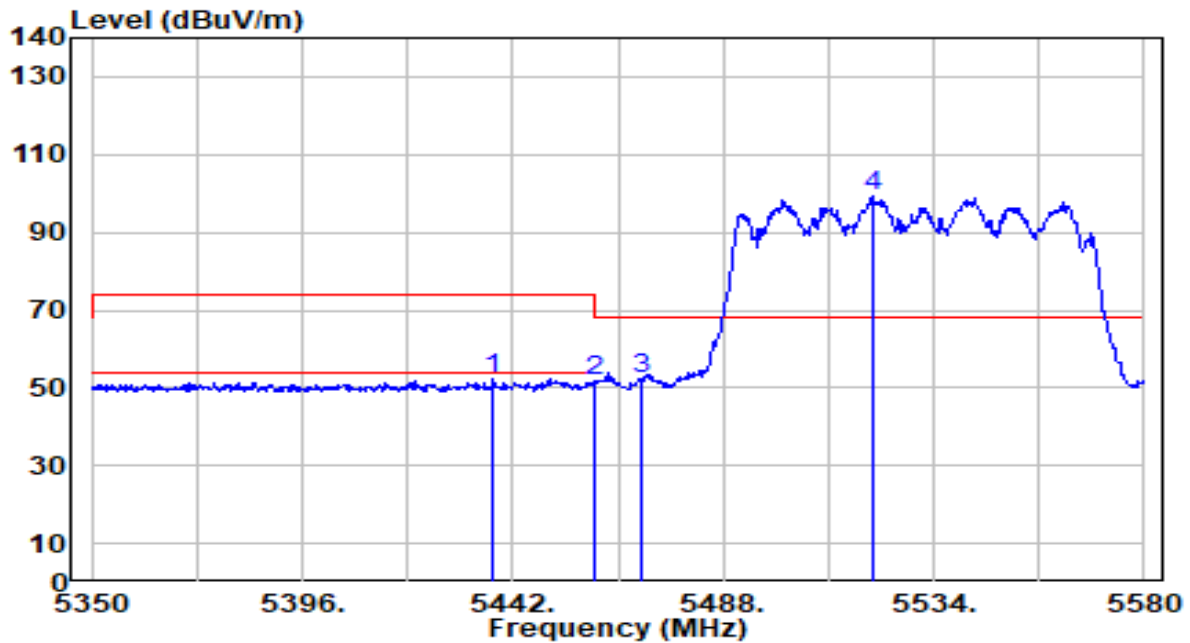


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.860	53.04	-0.94	52.10	-21.90	74.00	300	211	Peak
2	5460.000	52.63	-0.87	51.76	-22.24	74.00	300	211	Peak
3	* 5470.000	52.99	-0.84	52.15	-16.05	68.20	300	211	Peak
4	5520.660	99.84	-0.68	99.15	N/A	N/A	300	211	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

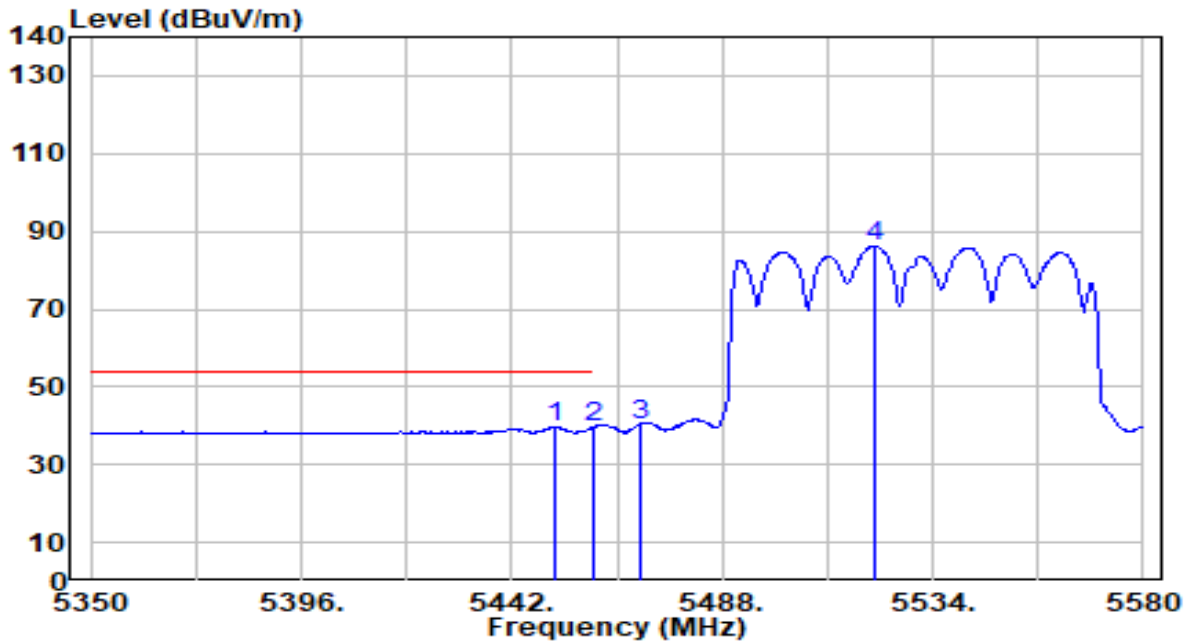


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.660	40.57	-0.89	39.68	-14.32	54.00	300	211	Average
2	* 5460.000	40.56	-0.87	39.69	-14.31	54.00	300	211	Average
3	5470.000	41.20	-0.84	40.36	N/A	N/A	300	211	Average
4	5521.350	86.79	-0.68	86.11	N/A	N/A	300	211	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

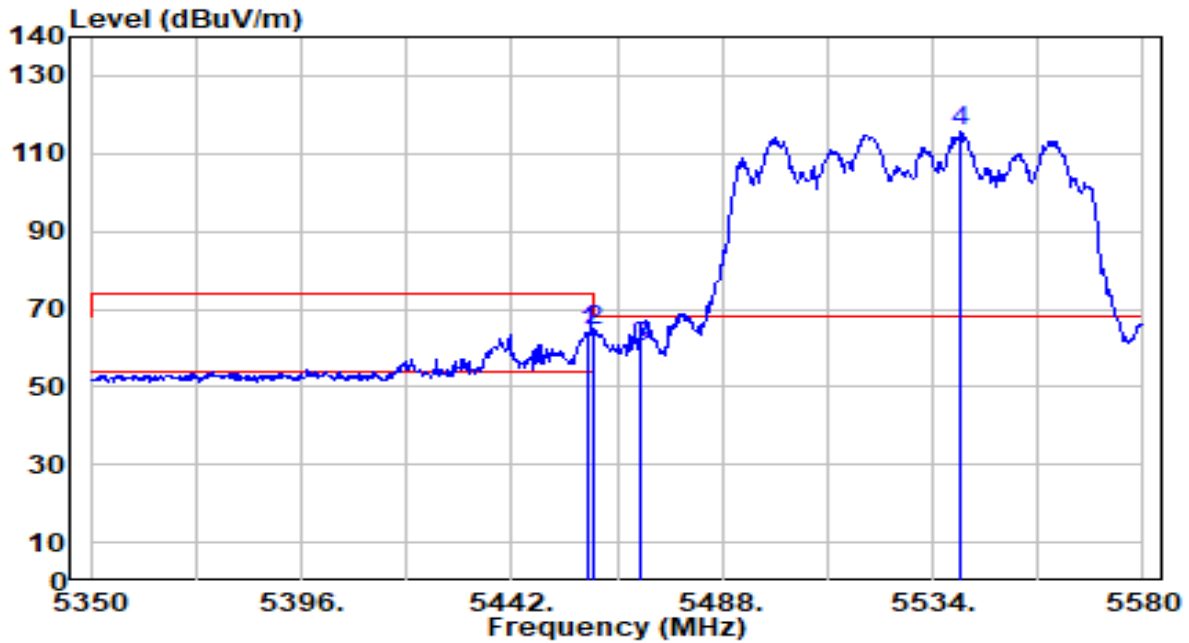


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.560	65.00	-0.87	64.12	-9.88	74.00	146	335	Peak
2	5460.000	65.43	-0.87	64.56	-9.44	74.00	146	335	Peak
3	* 5470.000	60.86	-0.84	60.02	-8.18	68.20	146	335	Peak
4	5539.980	116.24	-0.62	115.62	N/A	N/A	146	335	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

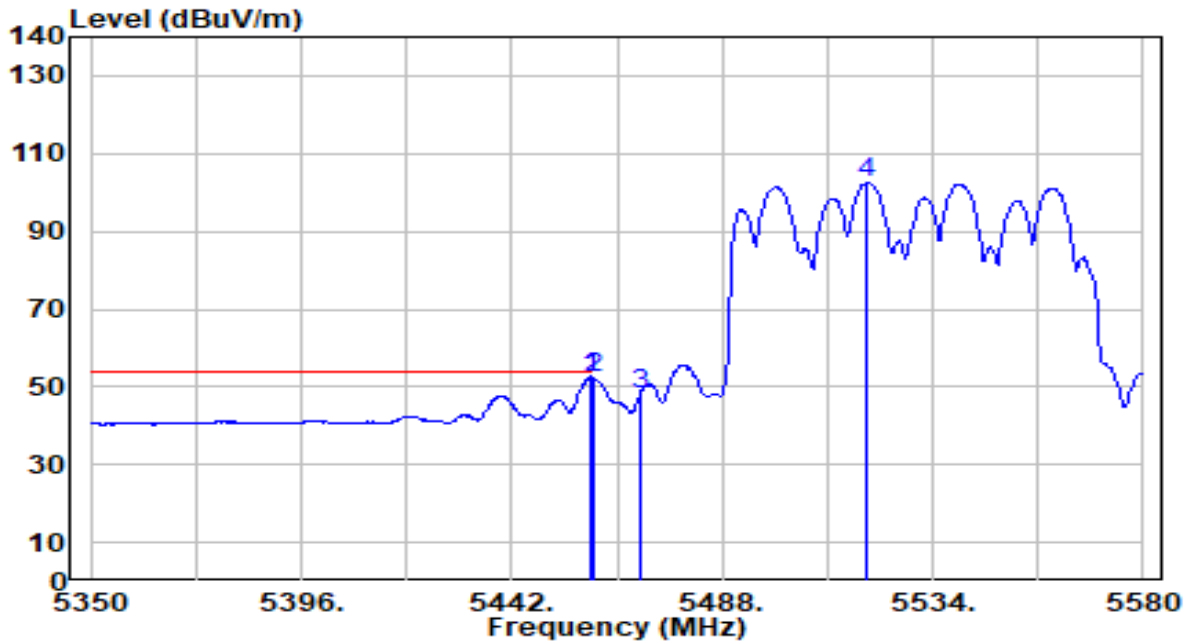


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.020	53.04	-0.87	52.17	-1.83	54.00	146	335	Average
2	* 5460.000	53.11	-0.87	52.24	-1.76	54.00	146	335	Average
3	5470.000	49.04	-0.84	48.20	N/A	N/A	146	335	Average
4	5519.740	103.26	-0.69	102.58	N/A	N/A	146	335	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

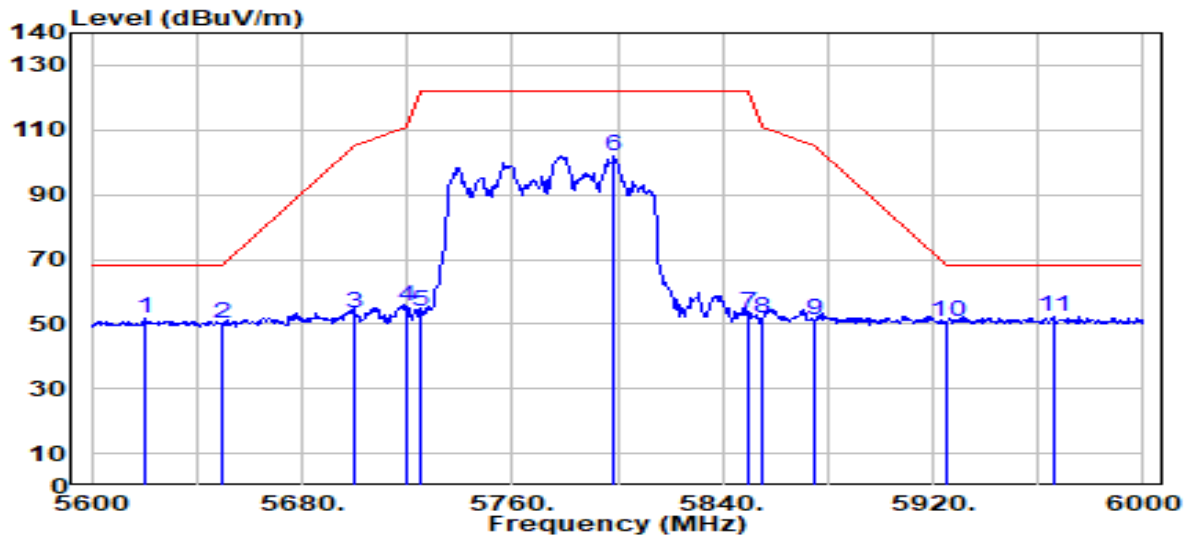


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5620.400	52.29	-0.32	51.97	-16.23	68.20	306	196	Peak
2	5650.000	50.57	-0.16	50.41	-17.79	68.20	306	196	Peak
3	5700.000	53.40	0.10	53.50	-51.70	105.20	306	196	Peak
4	5720.000	55.25	0.20	55.45	-55.35	110.80	306	196	Peak
5	5725.000	53.80	0.23	54.03	-68.17	122.20	306	196	Peak
6	5798.400	101.52	0.61	102.14	N/A	N/A	306	196	Peak
7	5850.000	52.96	0.58	53.54	-68.66	122.20	306	196	Peak
8	5855.000	51.18	0.58	51.76	-59.04	110.80	306	196	Peak
9	5875.000	50.65	0.57	51.21	-53.99	105.20	306	196	Peak
10	5925.000	50.43	0.53	50.96	-17.24	68.20	306	196	Peak
11 *	5965.600	51.71	0.50	52.21	-15.99	68.20	306	196	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2023-08-03
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

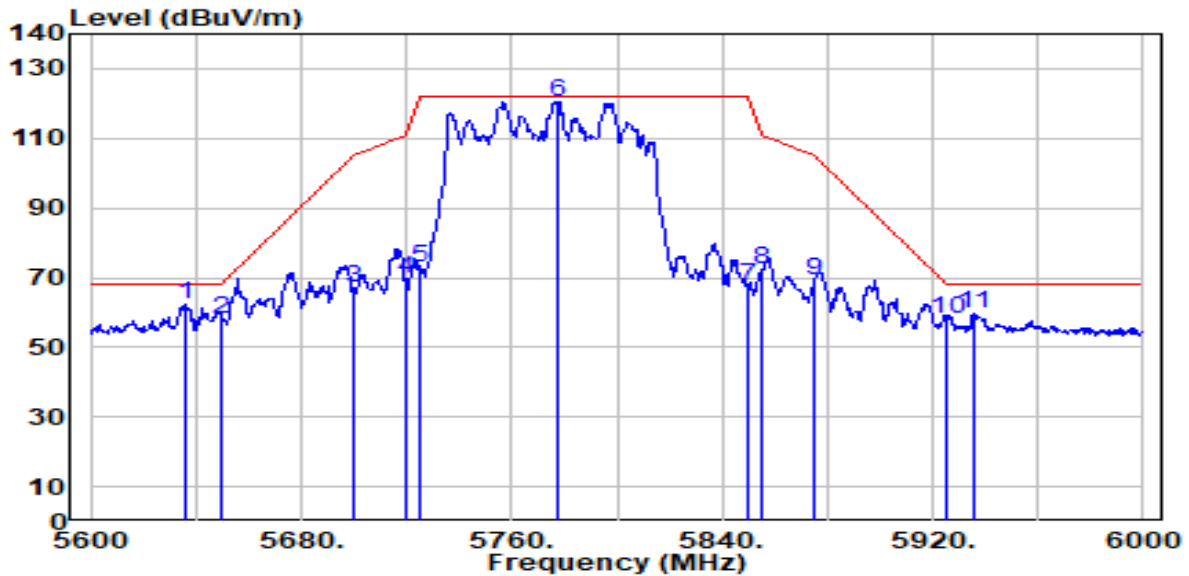

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5635.600	62.67	-0.24	62.43	-5.77	68.20	156	340	Peak
2	5650.000	58.53	-0.16	58.37	-9.83	68.20	156	340	Peak
3	5700.000	67.15	0.10	67.24	-37.96	105.20	156	340	Peak
4	5720.000	69.42	0.20	69.63	-41.17	110.80	156	340	Peak
5	5725.000	72.90	0.23	73.13	-49.07	122.20	156	340	Peak
6	5777.200	120.21	0.50	120.71	N/A	N/A	156	340	Peak
7	5850.000	66.90	0.58	67.49	-54.71	122.20	156	340	Peak
8	5855.000	71.56	0.58	72.14	-38.66	110.80	156	340	Peak
9	5875.000	68.69	0.57	69.26	-35.94	105.20	156	340	Peak
10	5925.000	57.73	0.53	58.25	-9.95	68.20	156	340	Peak
11	5935.200	59.20	0.52	59.72	-8.48	68.20	156	340	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## **8. CONCLUSION**

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

## **Appendix A : Test Setup Photograph**

Refer to “2307TW0119-UT” file.

## **Appendix B : External Photograph**

Refer to “2307TW0119-UE” file.

## **Appendix C : Internal Photograph**

Refer to “2307TW0119-UI” file.

————— The End —————