



### 802.11ac-VHT20 Power Spectral Density - Ant 1


Channel 36 (5180MHz)

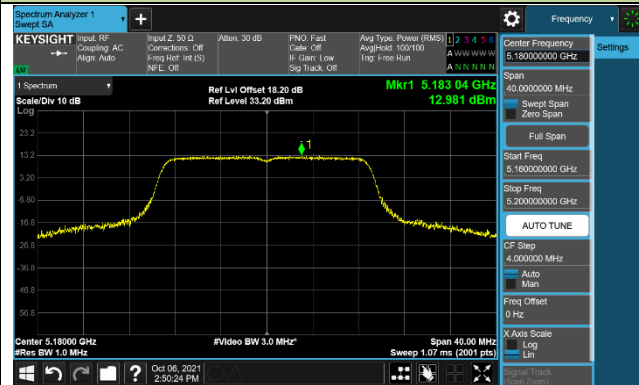


Channel 44 (5220MHz)

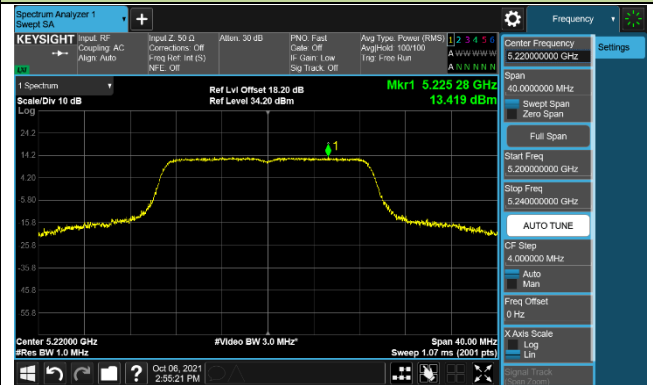


Channel 48 (5240MHz)

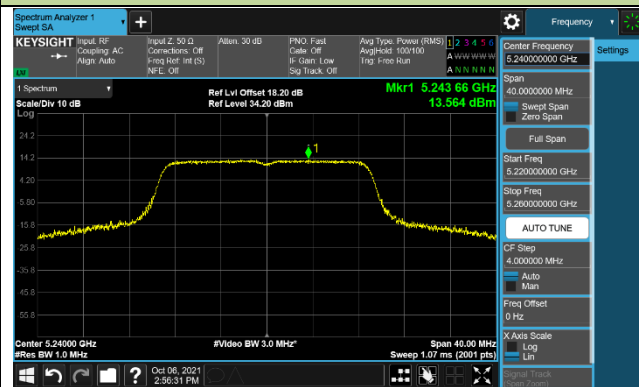


Channel 52 (5260MHz)

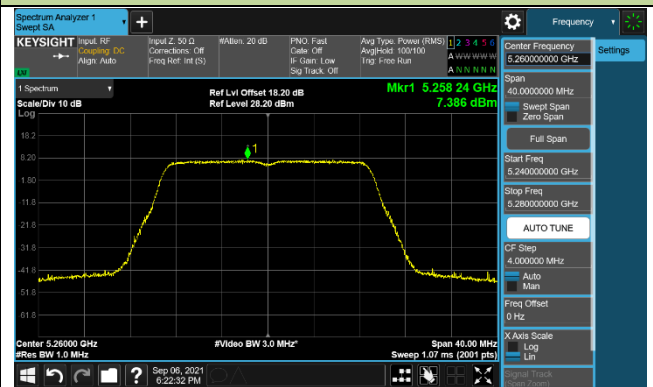


Channel 60 (5300MHz)

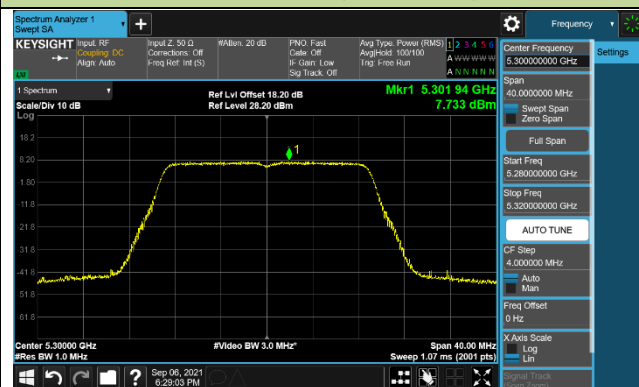


Channel 64 (5320MHz)

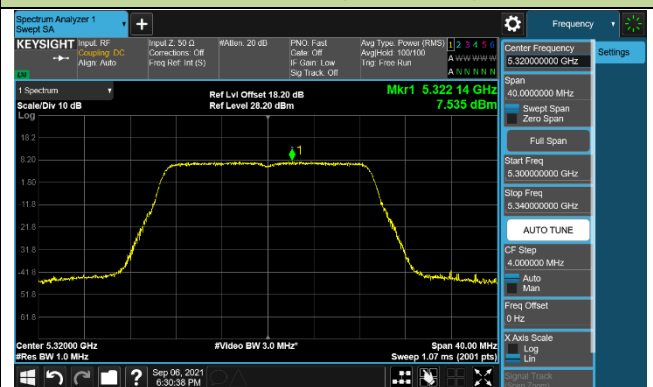


Channel 100 (5500MHz)

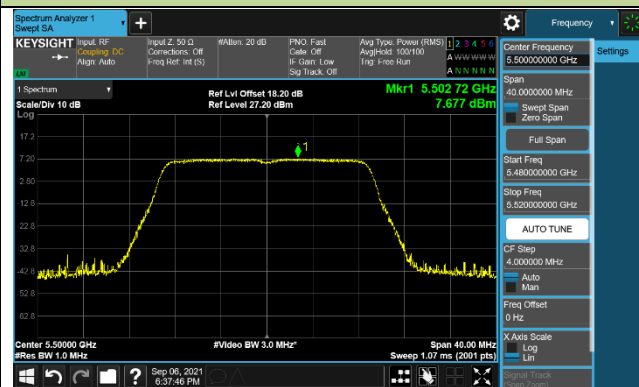

Channel 116 (5580MHz)

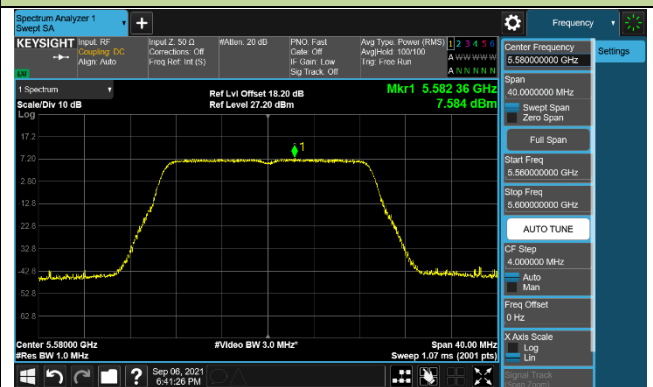

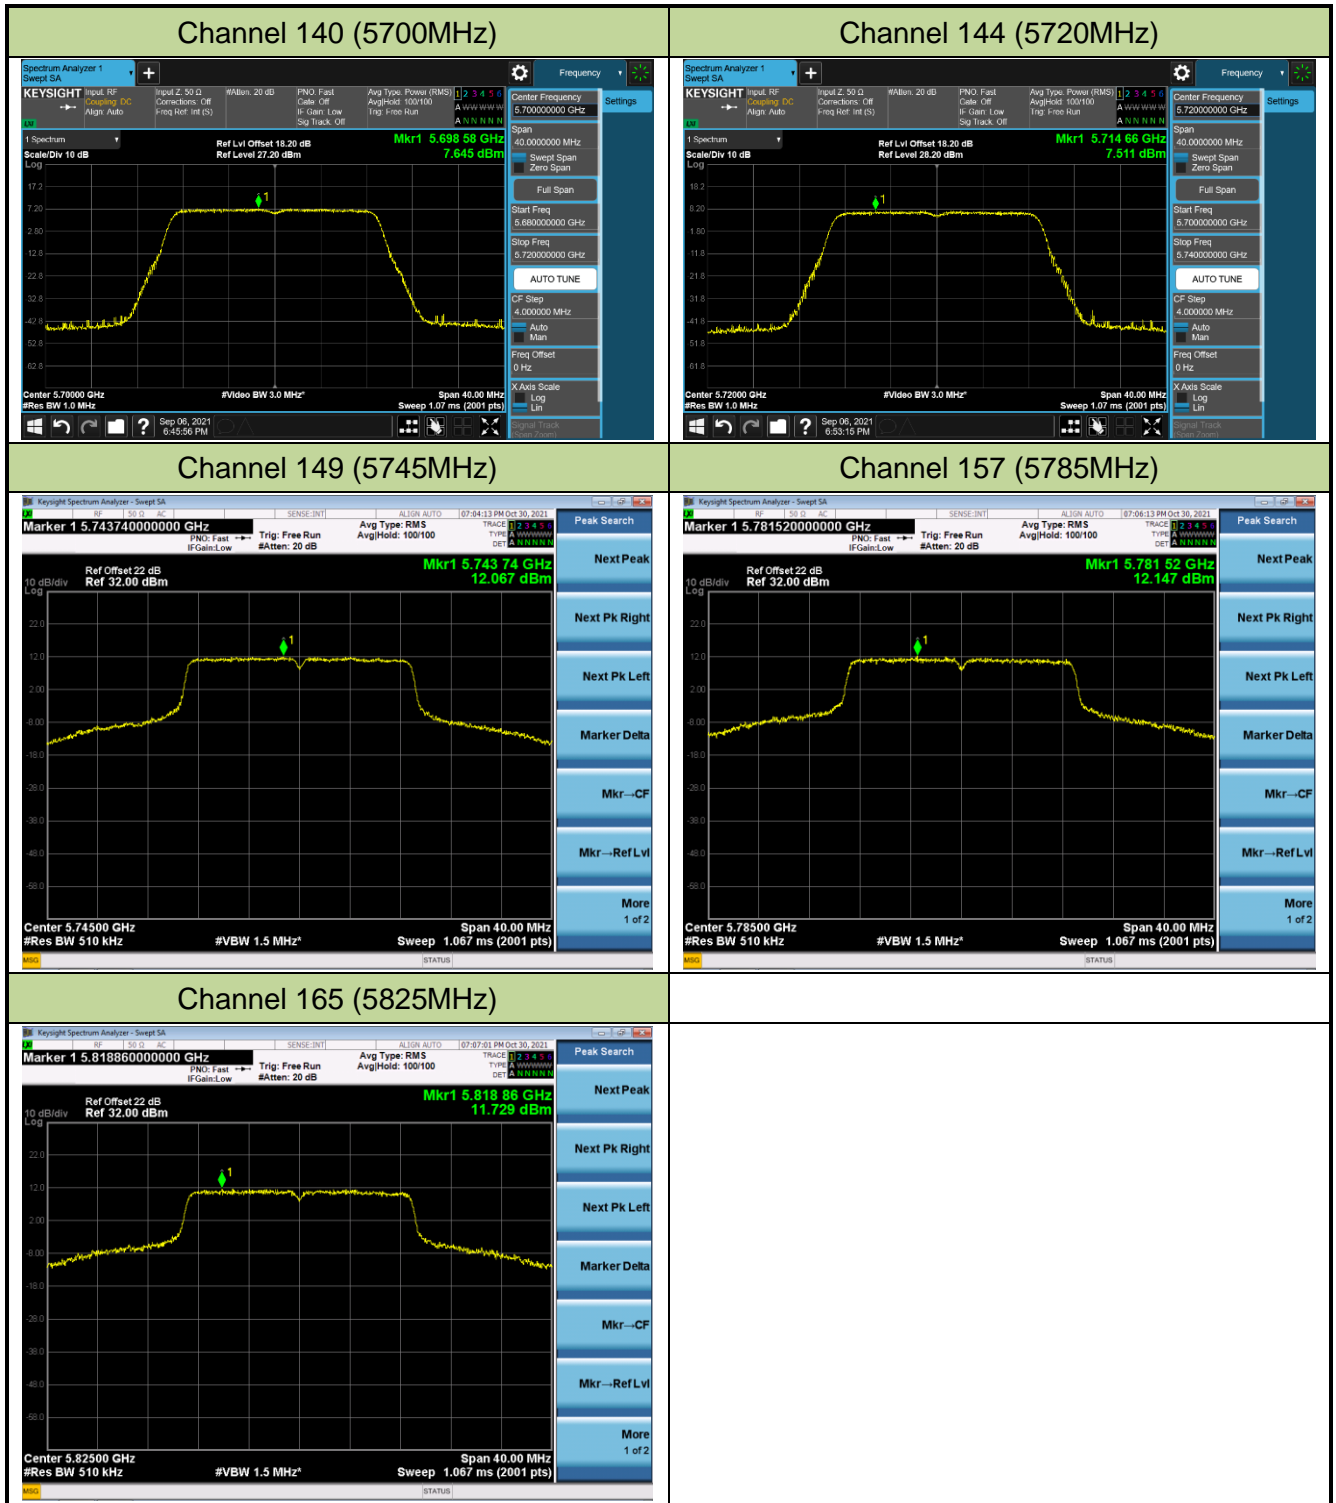


802.11ac-VHT40 Power Spectral Density - Ant 1


Channel 38 (5190MHz)




Channel 46 (5230MHz)

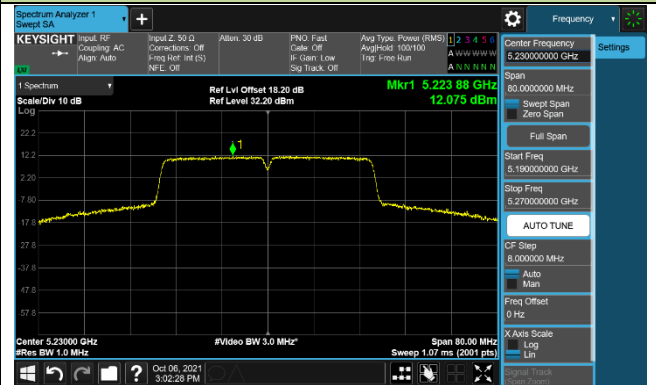


Channel 54 (5270MHz)

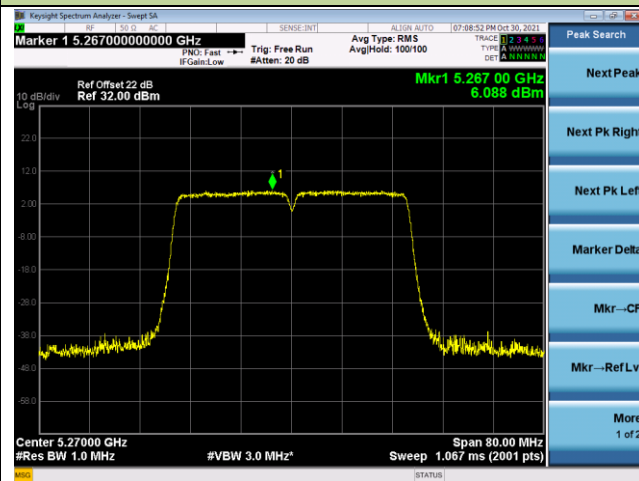


Channel 62 (5310MHz)

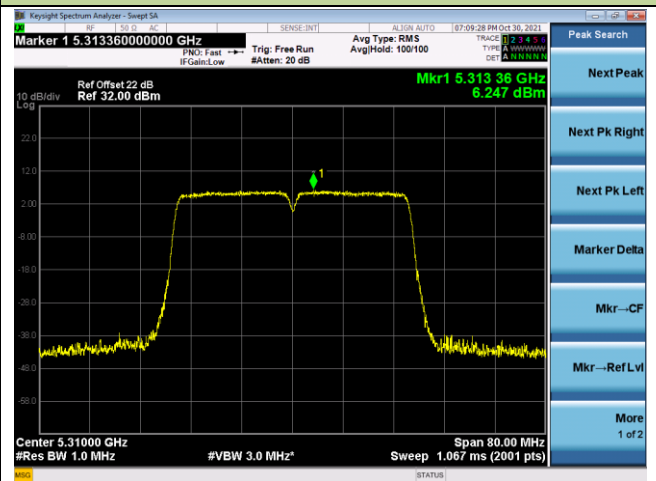


Channel 102 (5510MHz)

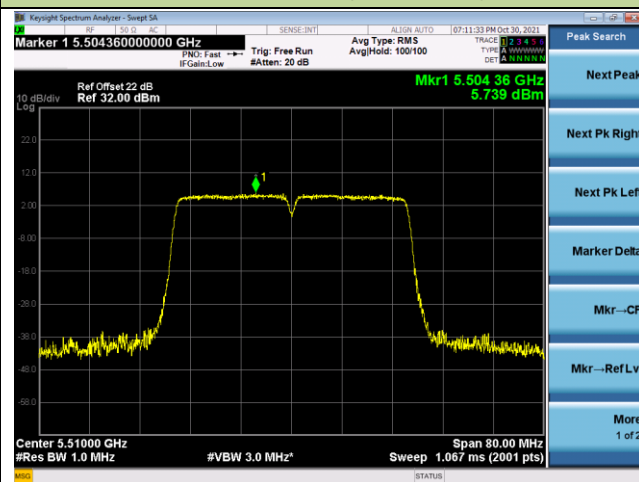


Channel 110 (5550MHz)

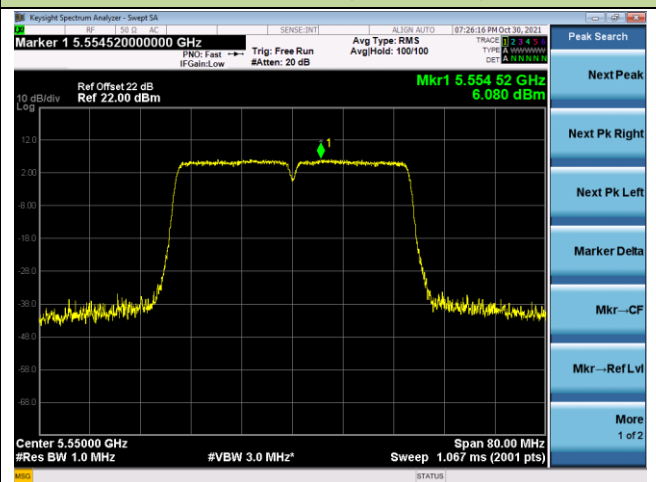

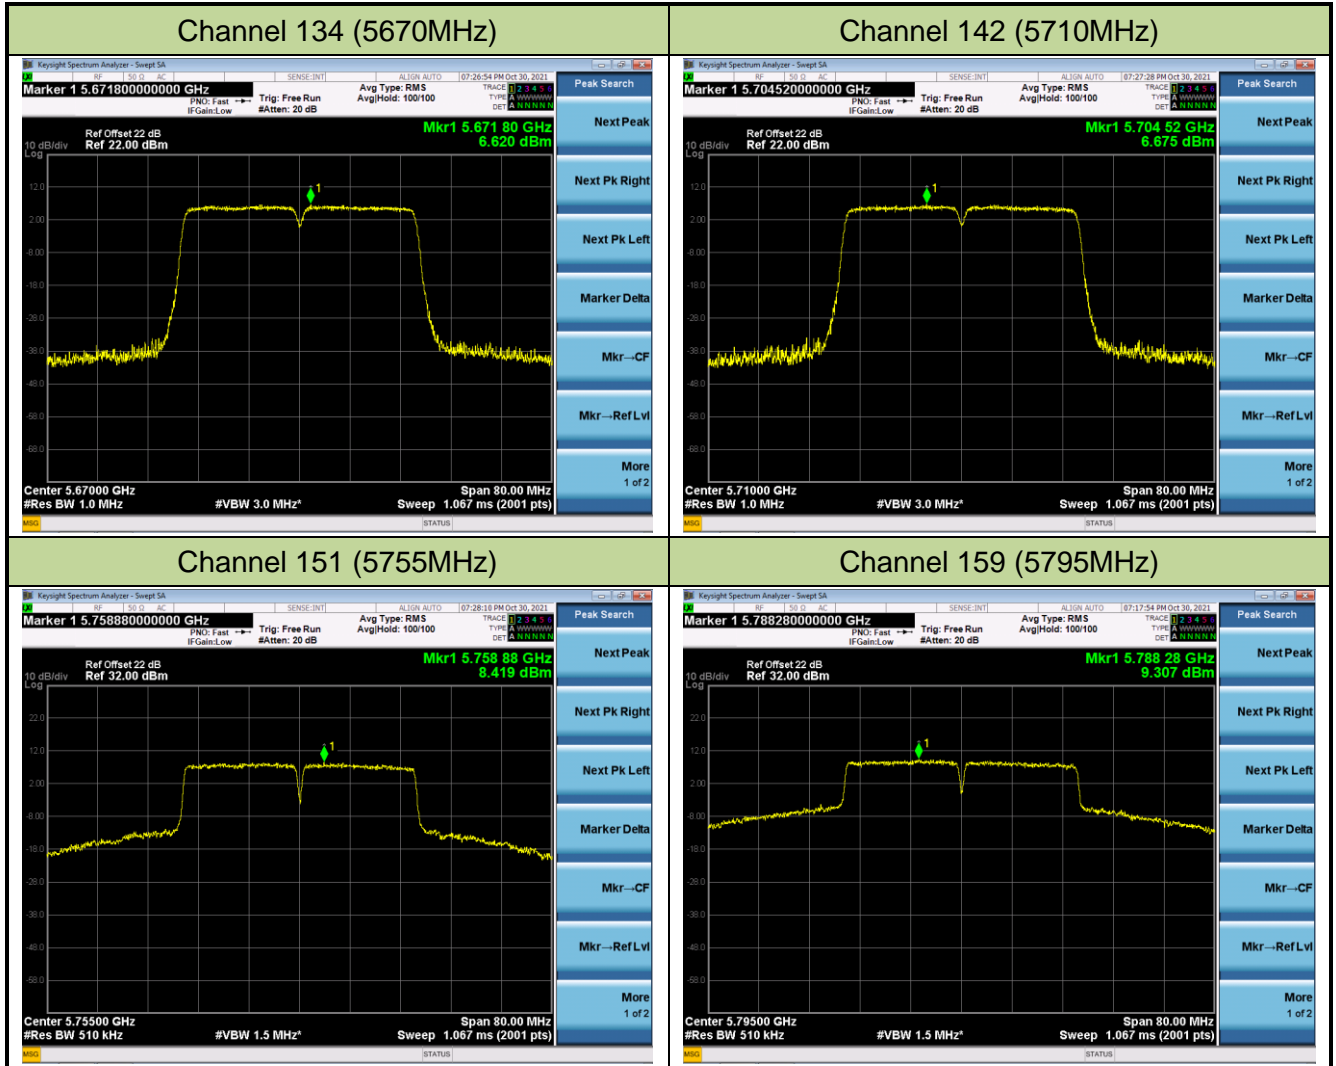


## 802.11ac-VHT80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

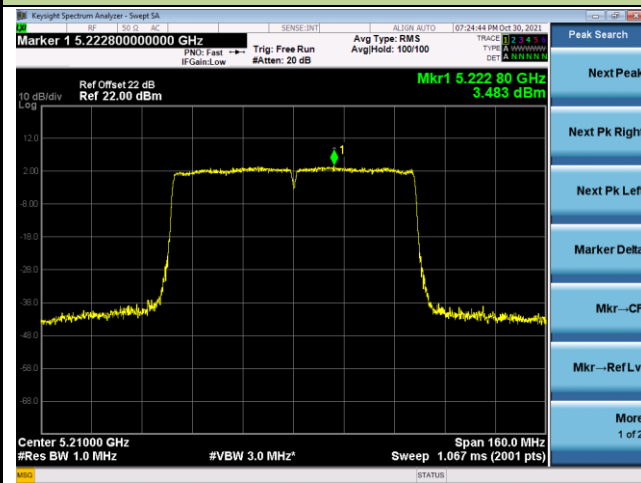


Channel 58 (5290MHz)

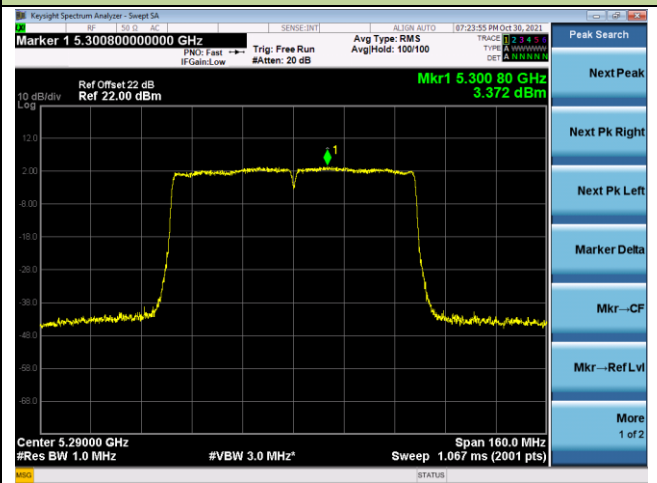


Channel 106 (5530MHz)

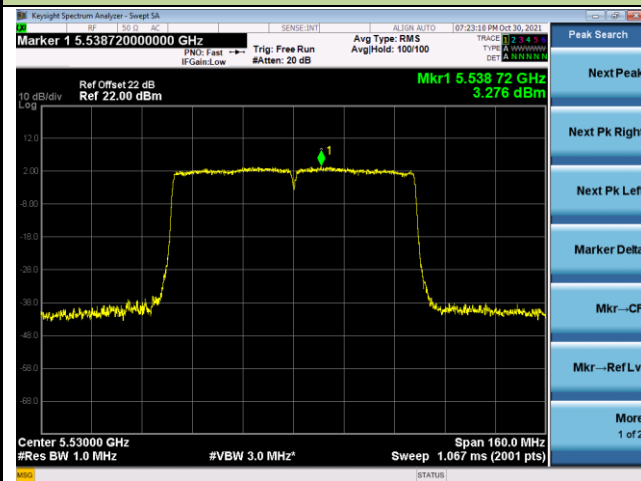


Channel 122 (5610MHz)

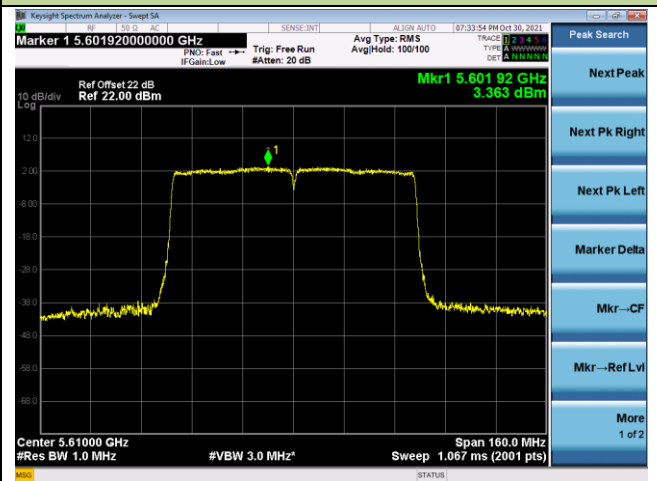

Channel 138 (5690MHz)

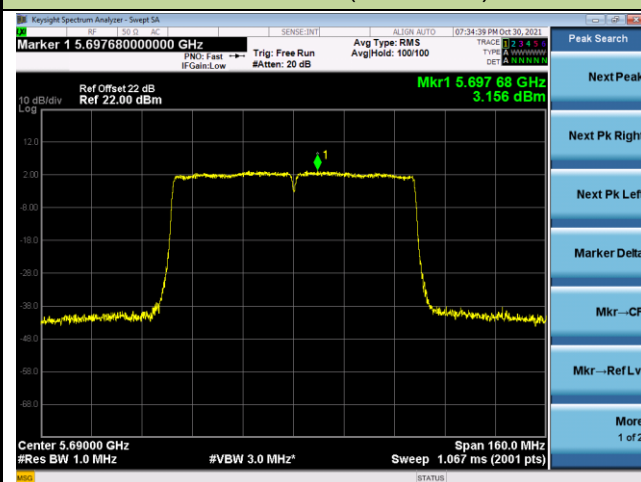


Channel 155 (5775MHz)

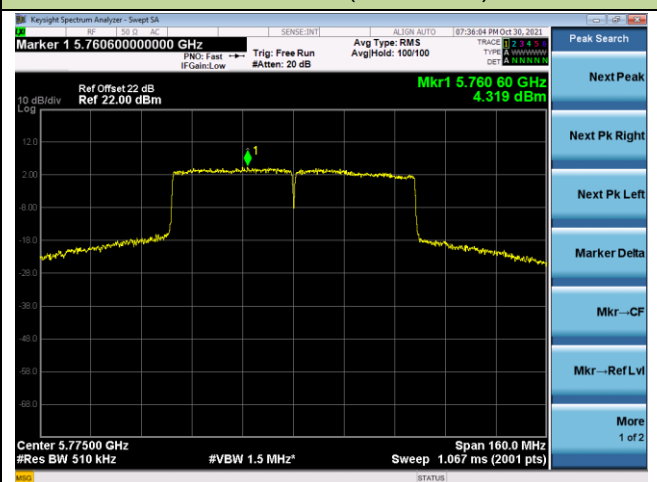


802.11ac-VHT160 Power Spectral Density - Ant 1

Channel 50 (5250MHz)

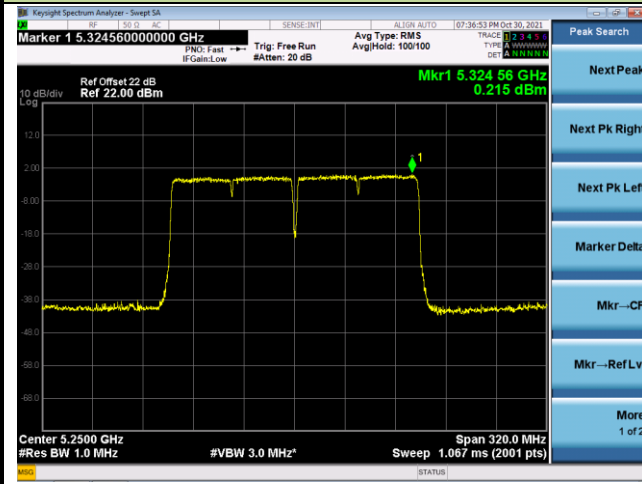


Channel 114 (5570MHz)

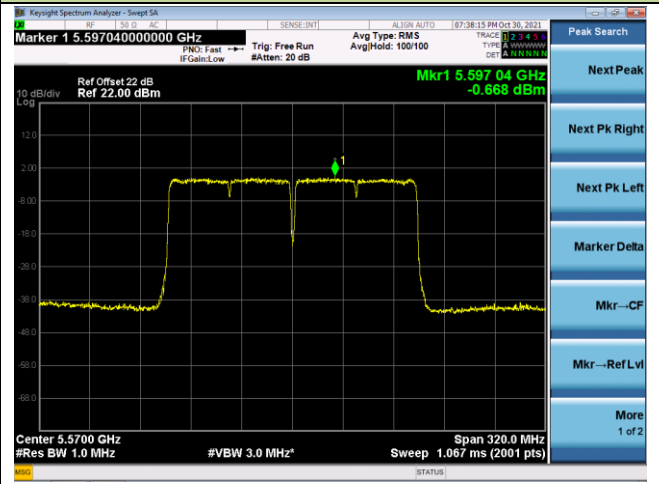


### 802.11ax-HE20 Power Spectral Density - Ant 1


Channel 36 (5180MHz)

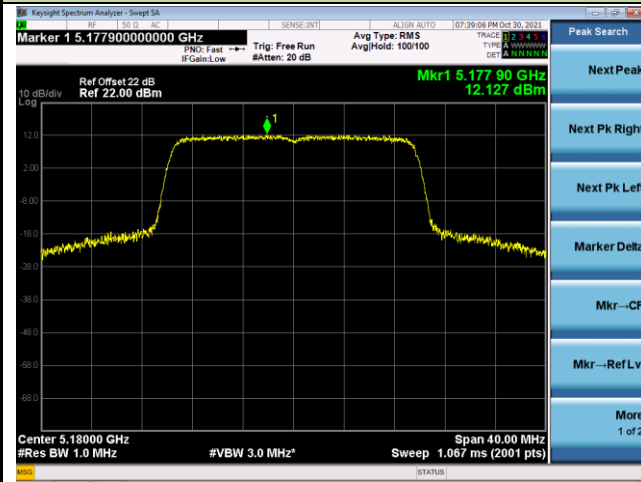


Channel 44 (5220MHz)

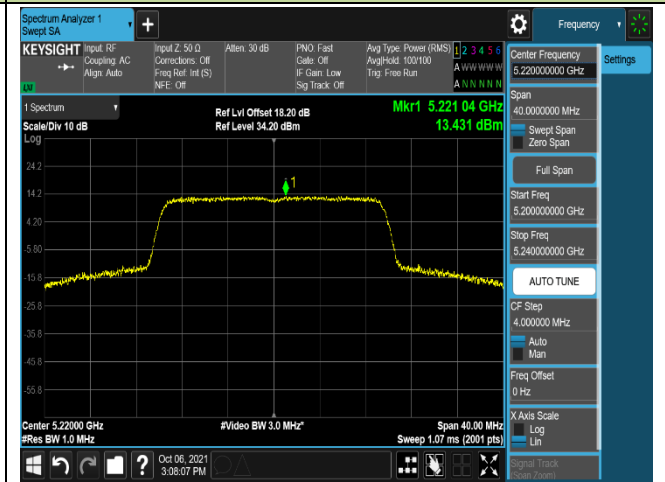


Channel 48 (5240MHz)

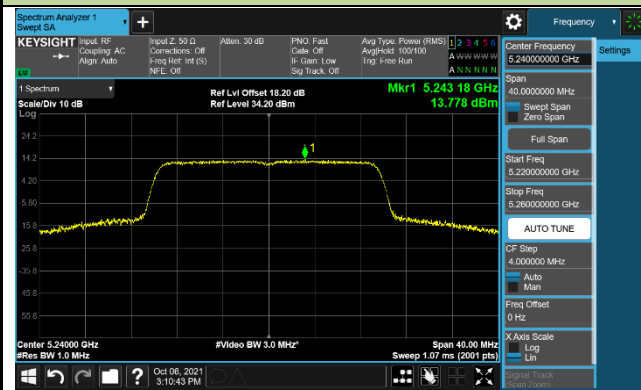


Channel 52 (5260MHz)

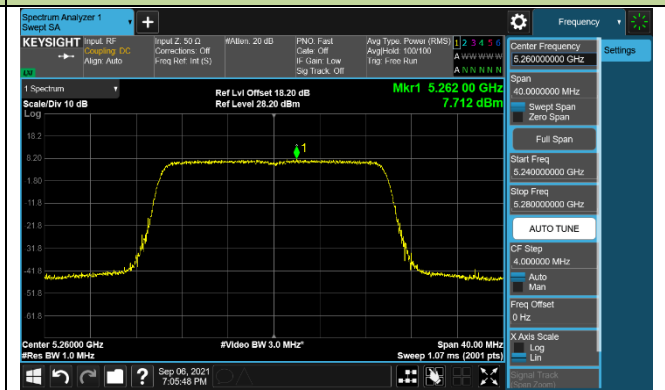


Channel 60 (5300MHz)

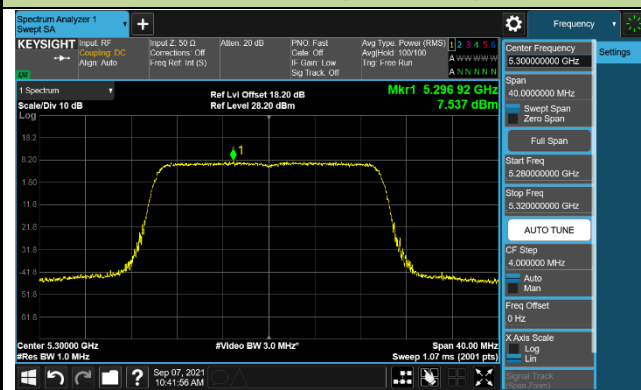


Channel 64 (5320MHz)

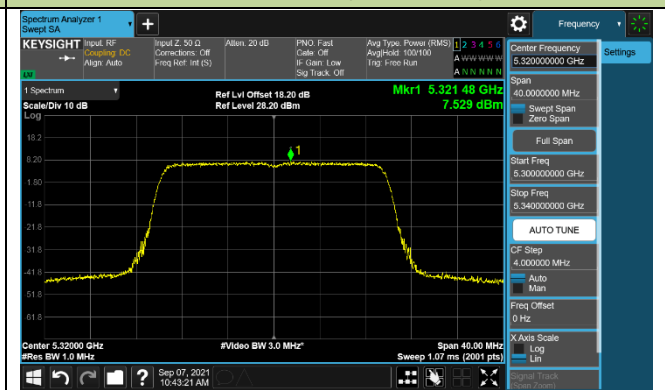



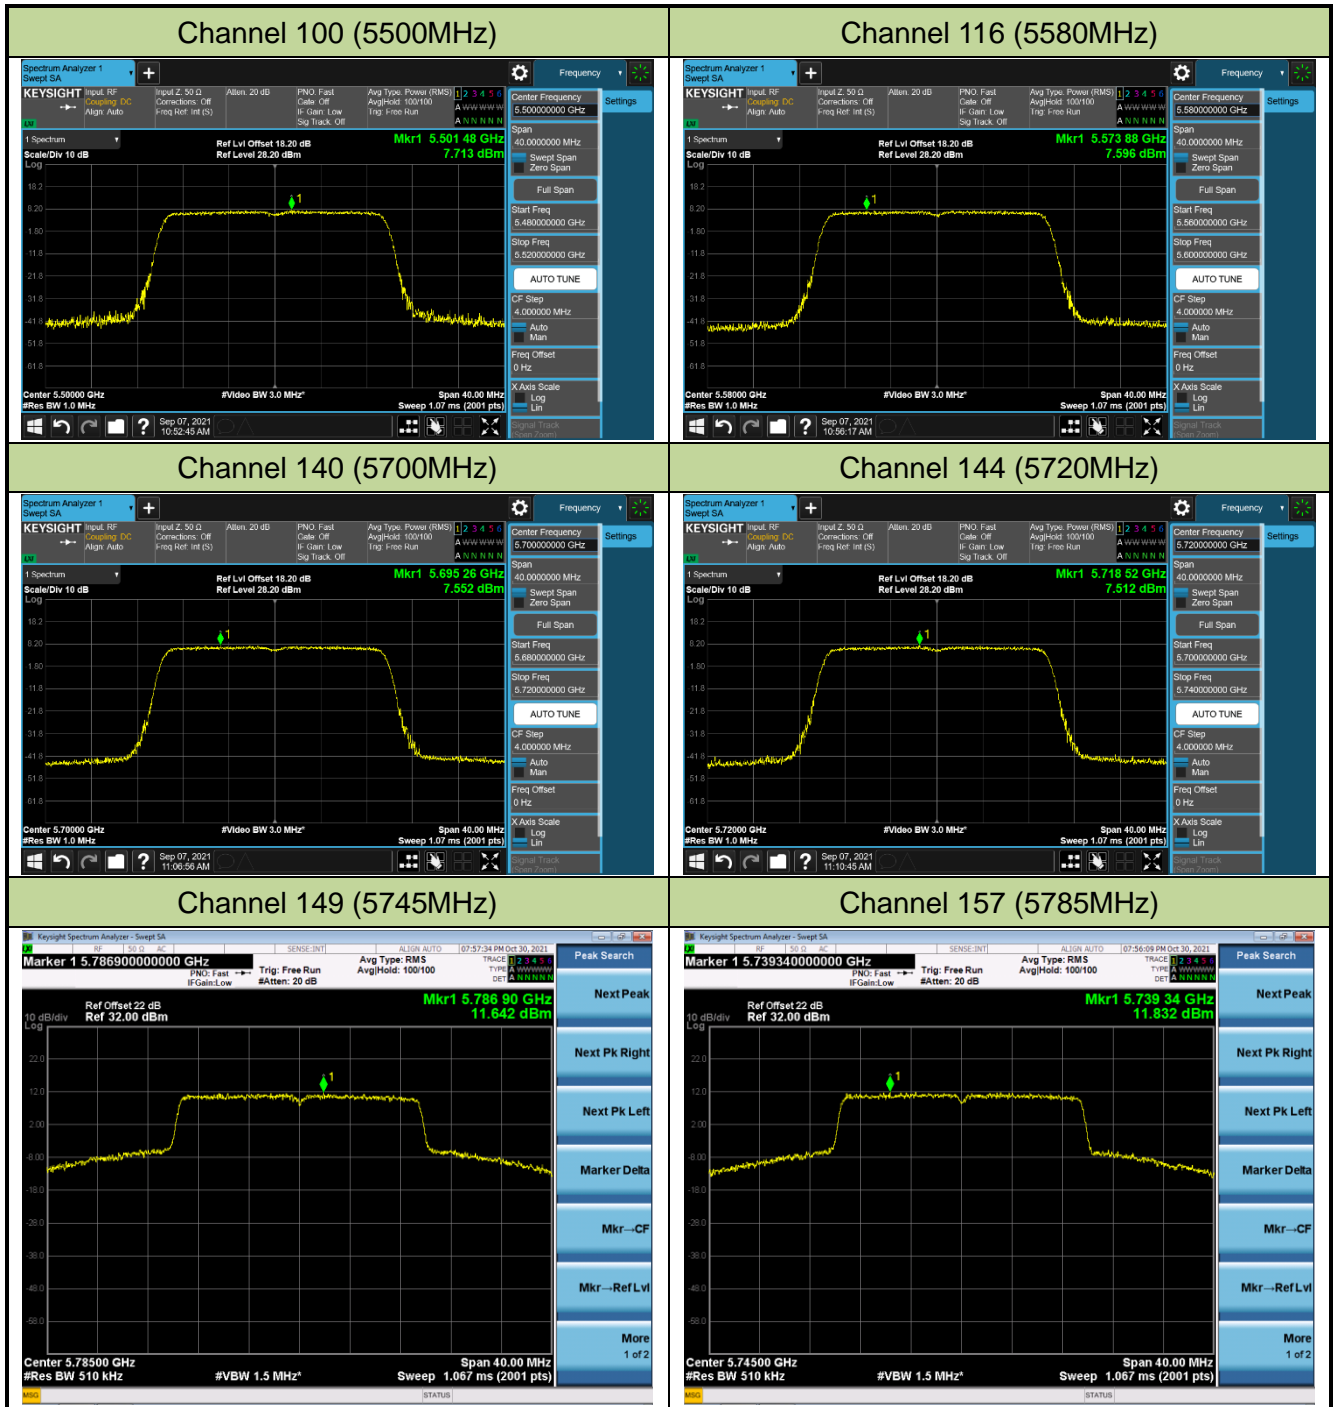




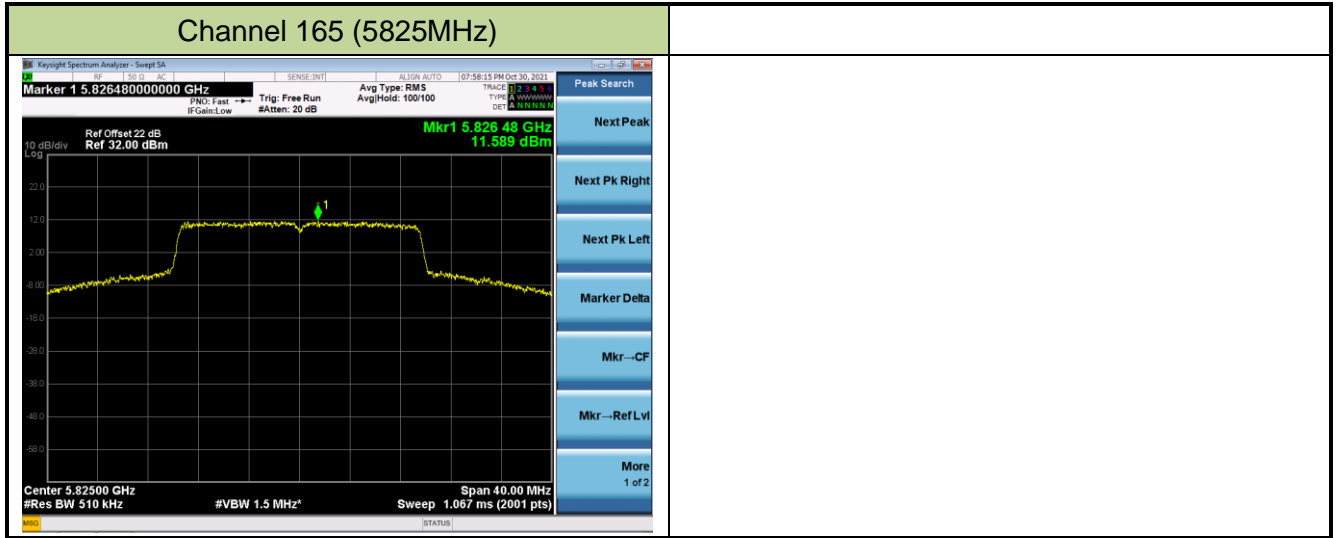


802.11ax-HE40 Power Spectral Density - Ant 1


Channel 38 (5190MHz)

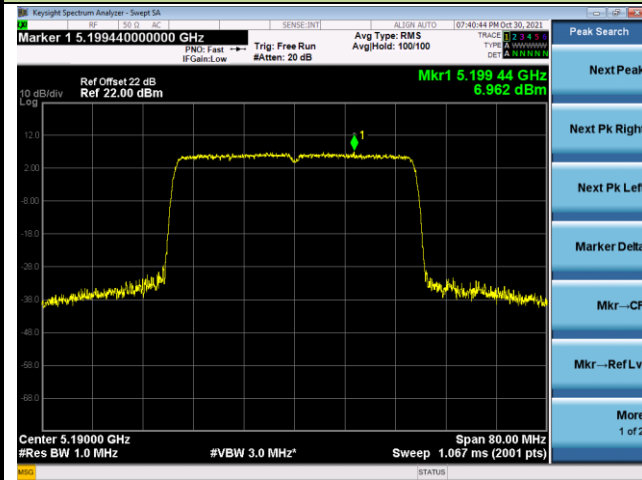


Channel 46 (5230MHz)

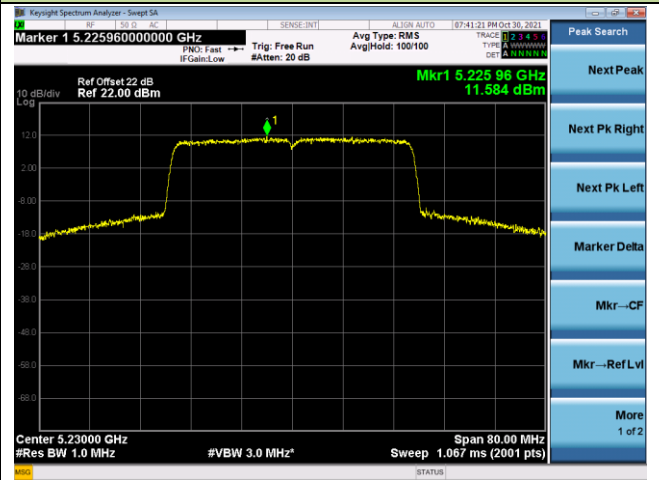


Channel 54 (5270MHz)

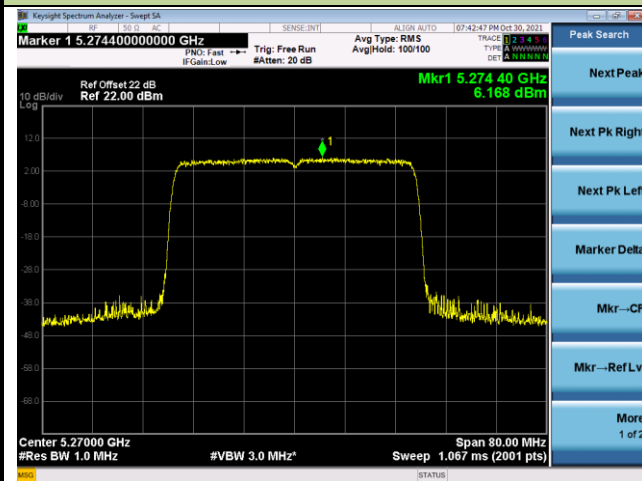


Channel 62 (5310MHz)

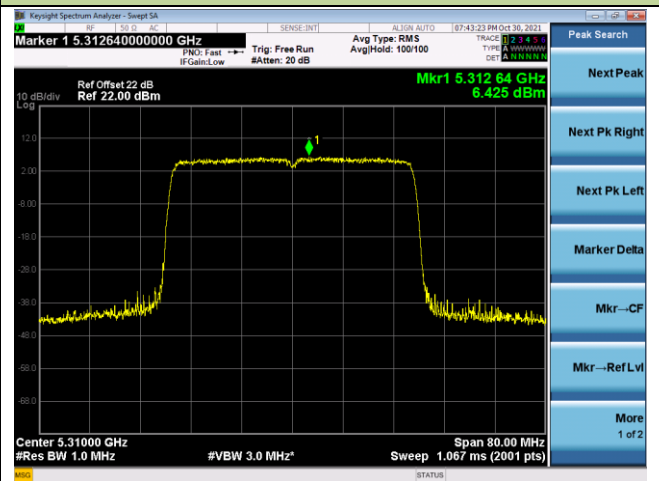


Channel 102 (5510MHz)

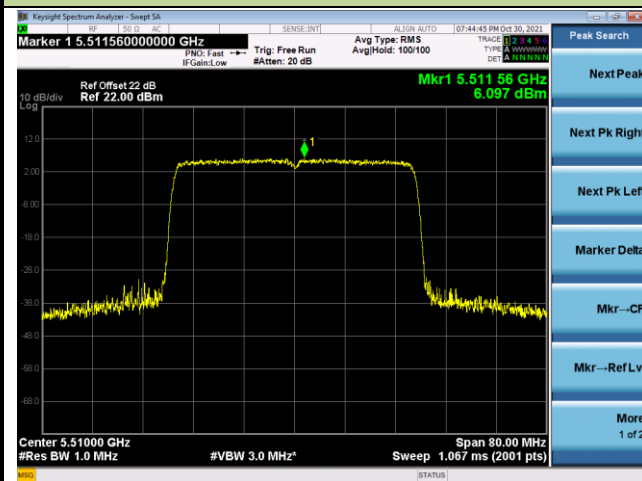


Channel 110 (5550MHz)

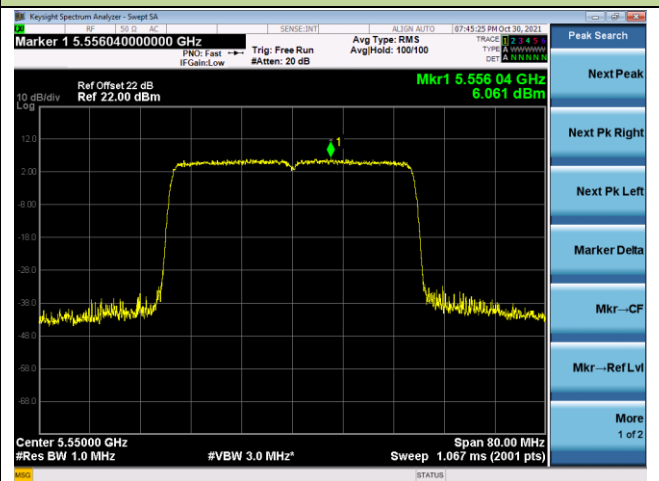

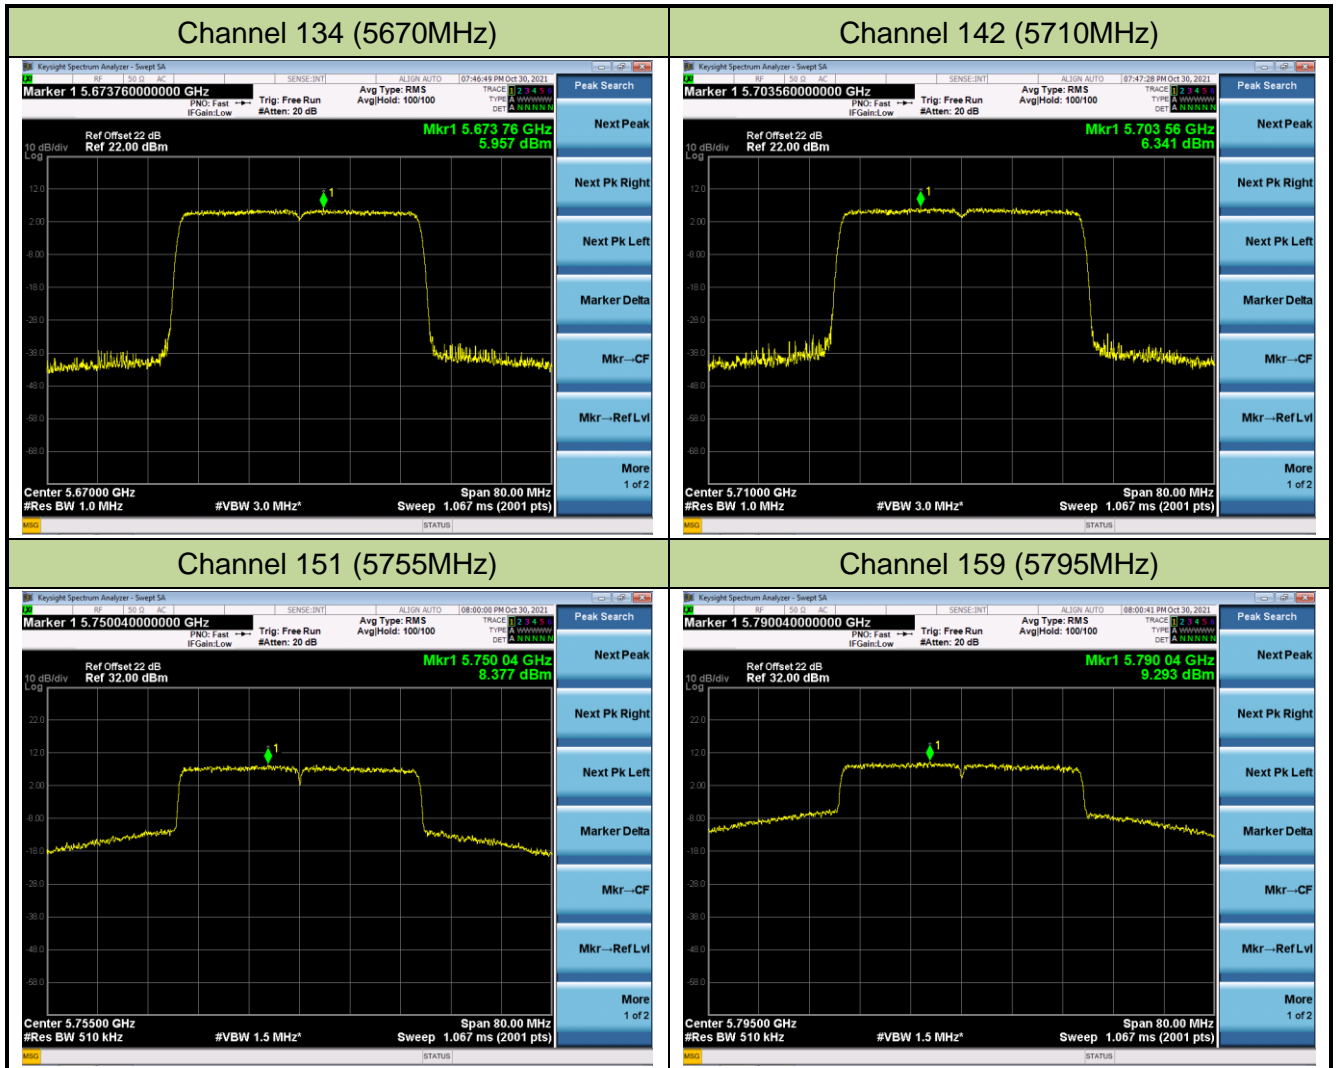


802.11ax-HE80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

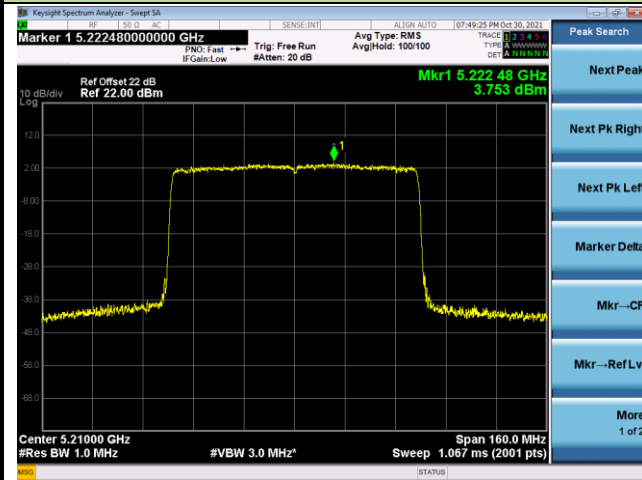


Channel 58 (5290MHz)

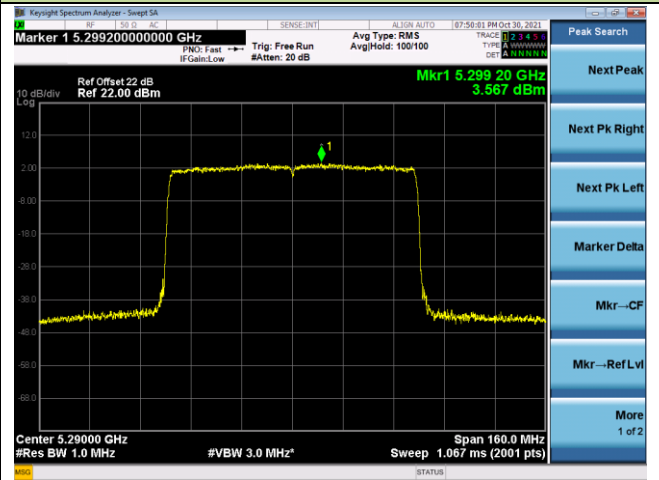


Channel 106 (5530MHz)

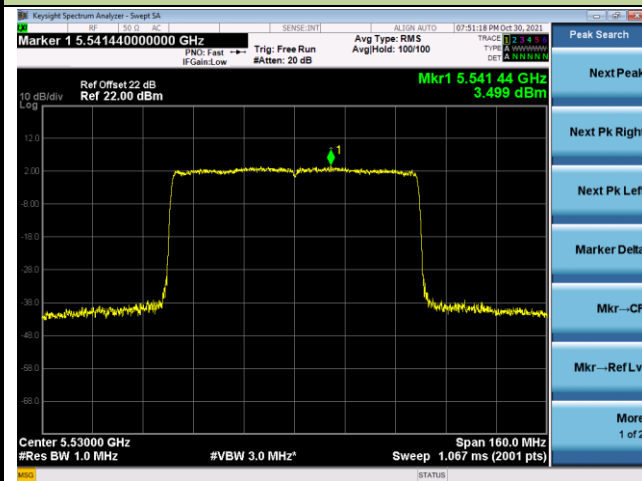

Channel 122 (5610MHz)

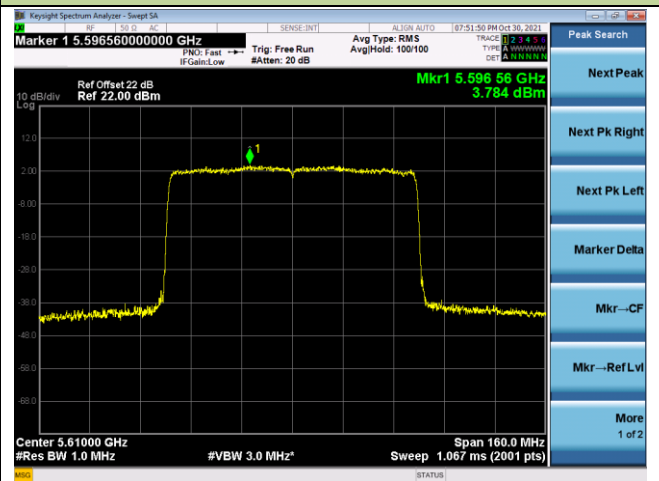

Channel 138 (5690MHz)

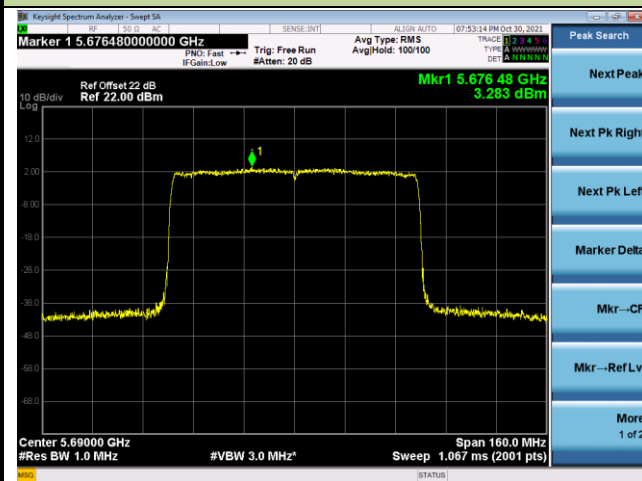



Channel 155 (5775MHz)



802.11ax-HE160 Power Spectral Density - Ant 1

Channel 50 (5250MHz)

Channel 114 (5570MHz)

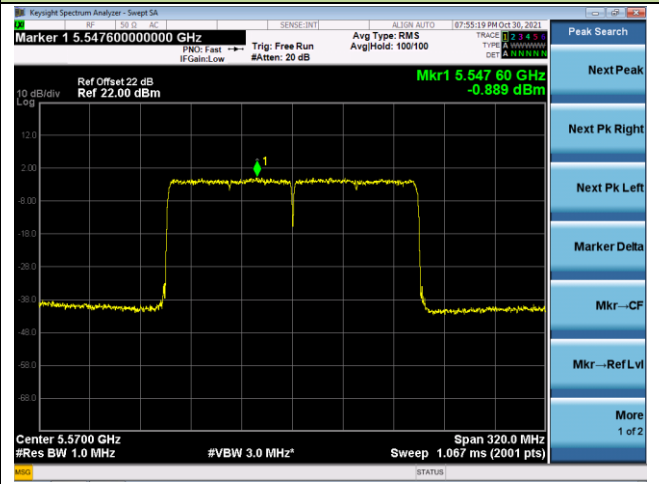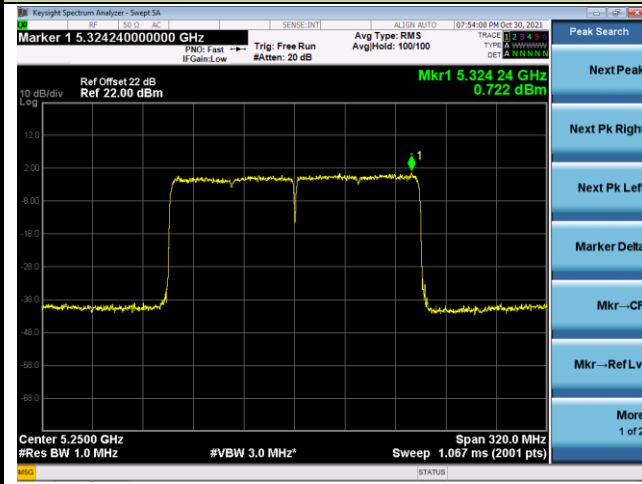

## **6.7. Frequency Stability Measurement**

### **6.7.1. Test Limit**

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5GHz band (IEEE 802.11 specification).

### **6.7.2. Test Procedure Used**

#### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 6.7.3. Test Setup

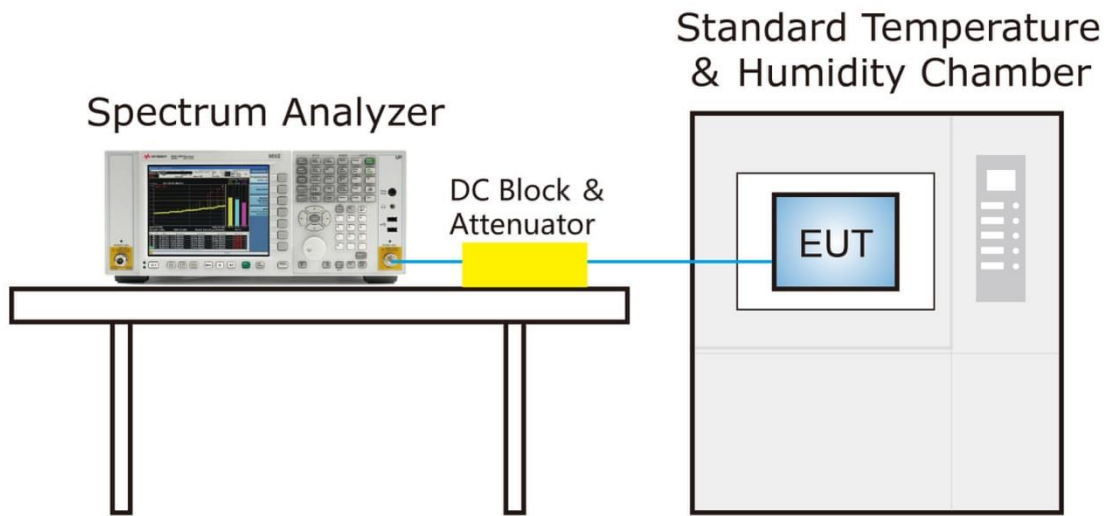



**6.7.4. Test Result**

Product	AXE5400 Tri-Band Wi-Fi 6E Router	Test Engineer	Eric Lin
Test Site	SR2	Test Date	2021/11/17
Test Mode	5180MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	-30	-3.14	-3.21	-2.19	-2.56
		-20	-3.15	-1.13	-2.26	-2.66
		-10	-3.15	-1.22	-2.29	-2.68
		0	-3.16	-1.27	-2.32	-2.70
		+ 10	-3.16	-1.44	-2.34	-2.75
		+ 20	-3.17	-1.61	-2.39	-2.79
		+ 30	-3.18	-1.86	-2.41	-2.84
		+ 40	-3.18	-1.90	-2.44	-2.85
		+ 50	-3.19	-1.99	-2.47	-2.87
115%	138	+ 20	-3.20	-2.09	-2.52	-2.89
85%	102	+ 20	-3.21	-2.11	-2.54	-2.91

Note: Frequency Tolerance (ppm) =  $\frac{\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}]\}}{\text{Declared Frequency (Hz)}} * 10^6$ .

## 6.8. Radiated Spurious Emission Measurement

### 6.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

### 6.8.3. Test Setting

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.8.4. Test Setup

#### Below 1GHz Test Setup:

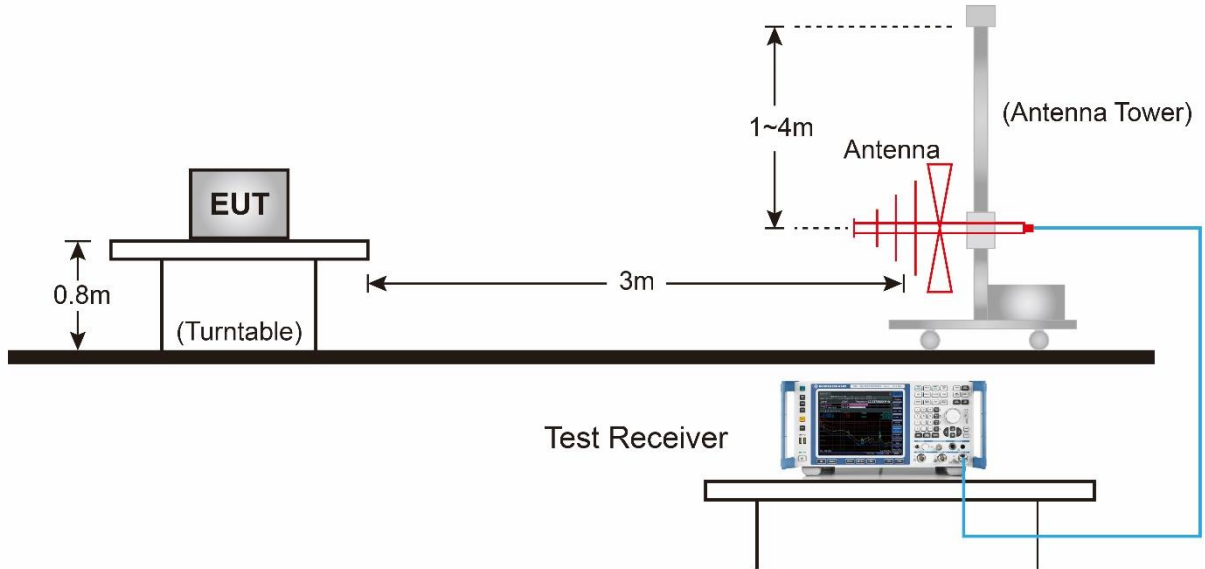


#### Above 1GHz Test Setup:

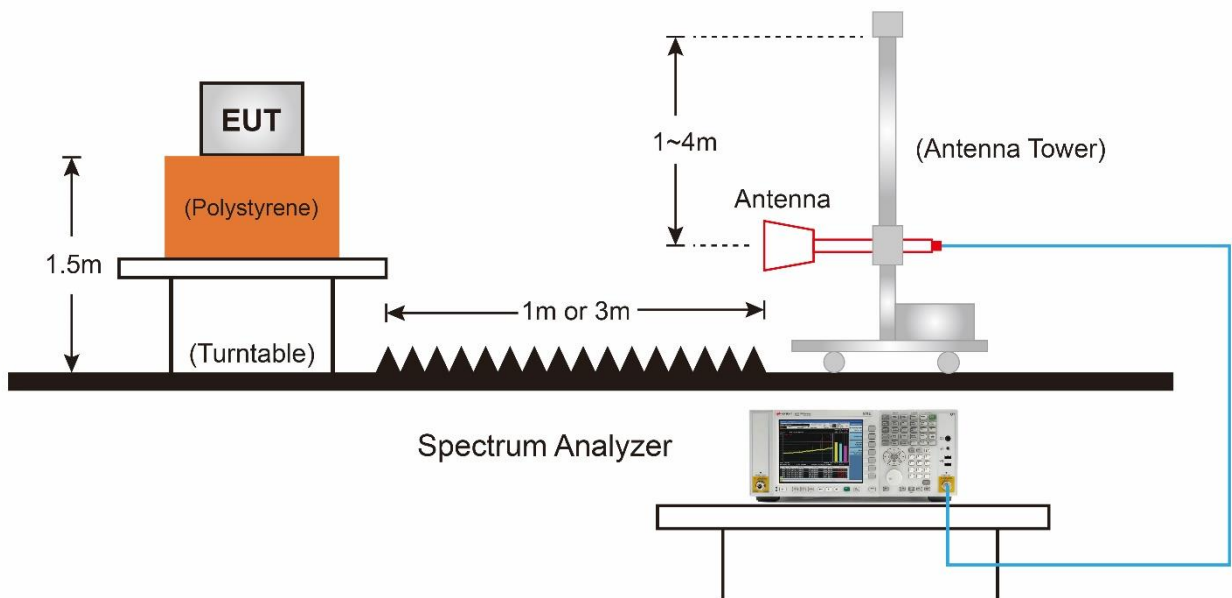

**6.8.5. Test Result**

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	AC 120V/60Hz

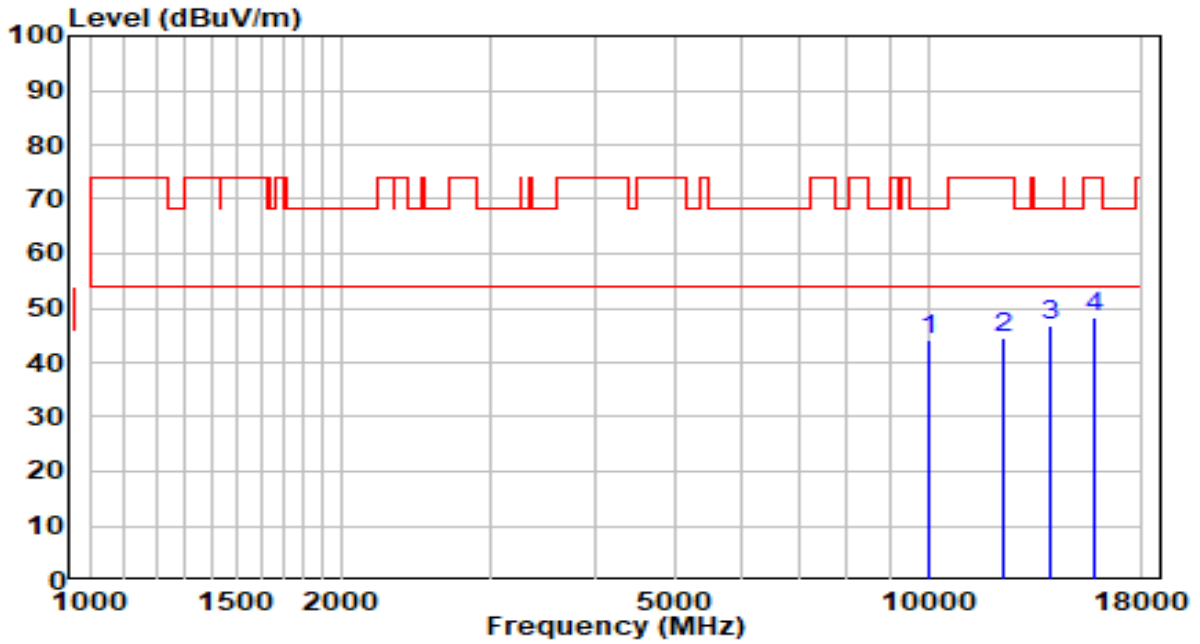


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10001.500	27.51	16.57	44.08	-24.12	68.20	Peak
2	12330.500	25.85	18.58	44.43	-29.57	74.00	Peak
3	* 14030.500	24.31	22.42	46.73	-21.47	68.20	Peak
4	15747.500	27.53	20.74	48.27	-25.73	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	AC 120V/60Hz

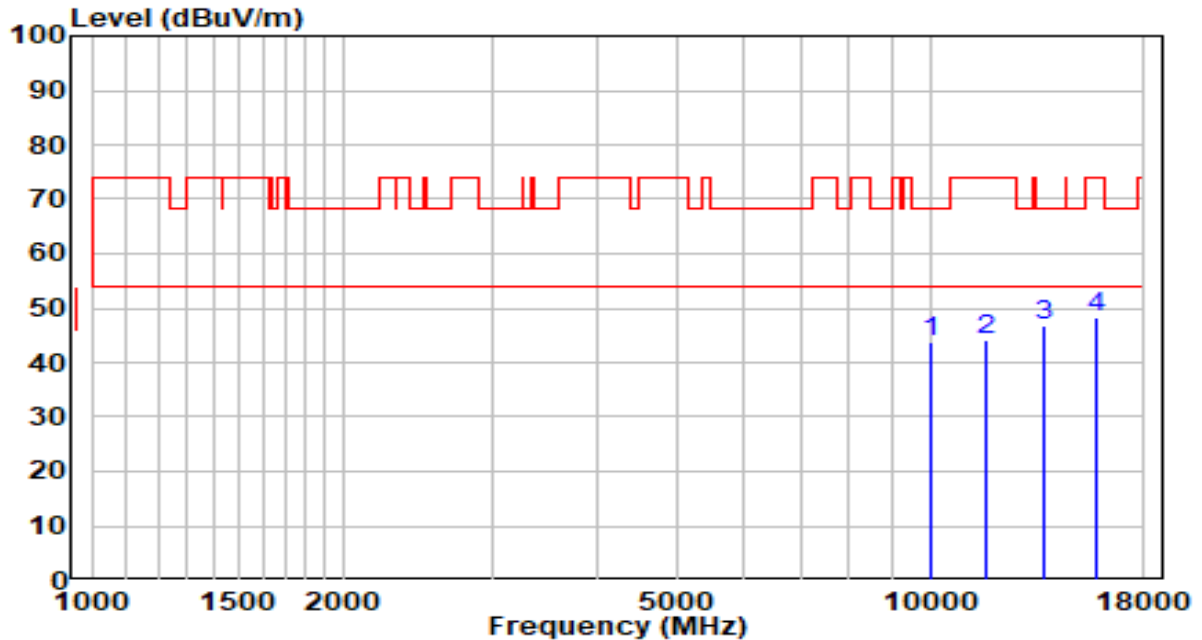


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10018.500	26.99	16.63	43.62	-24.58	68.20	Peak
2	11642.000	24.27	19.73	44.00	-30.00	74.00	Peak
3	* 13707.500	24.64	22.09	46.73	-21.47	68.20	Peak
4	15832.500	27.61	20.53	48.14	-25.86	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5220MHz by 802.11a	Test Voltage	AC 120V/60Hz

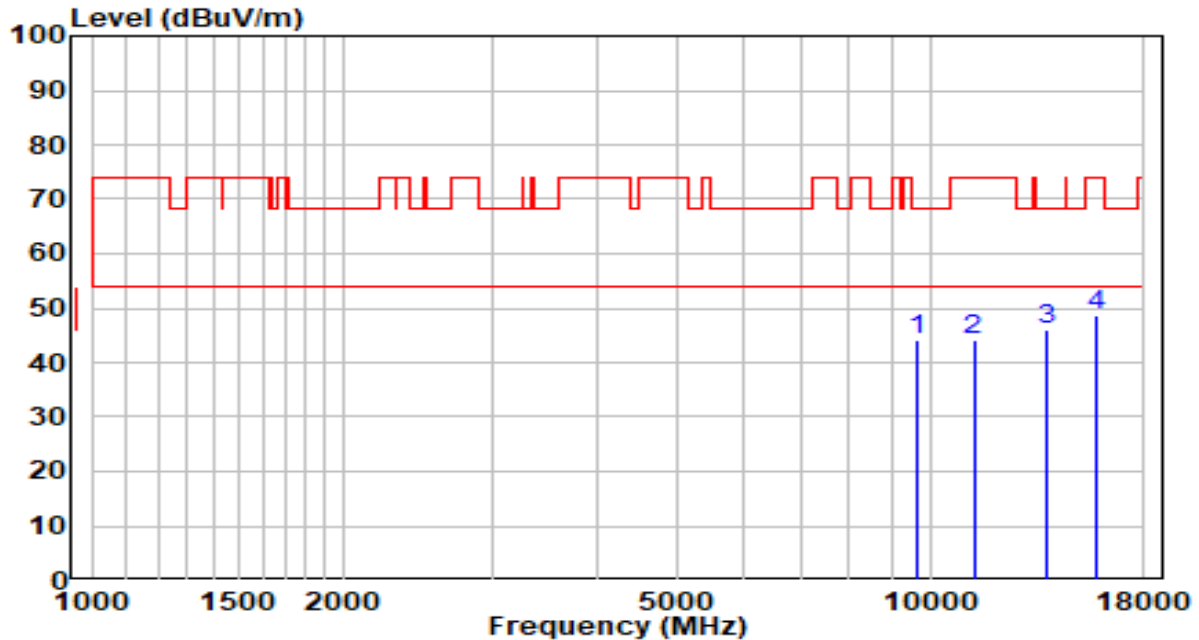


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9619.000	28.16	15.92	44.08	-24.12	68.20	Peak
2	11268.000	24.47	19.69	44.16	-29.84	74.00	Peak
3	* 13818.000	23.76	22.21	45.97	-22.23	68.20	Peak
4	15756.000	28.02	20.72	48.74	-25.26	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).



EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5220MHz by 802.11a	Test Voltage	AC 120V/60Hz

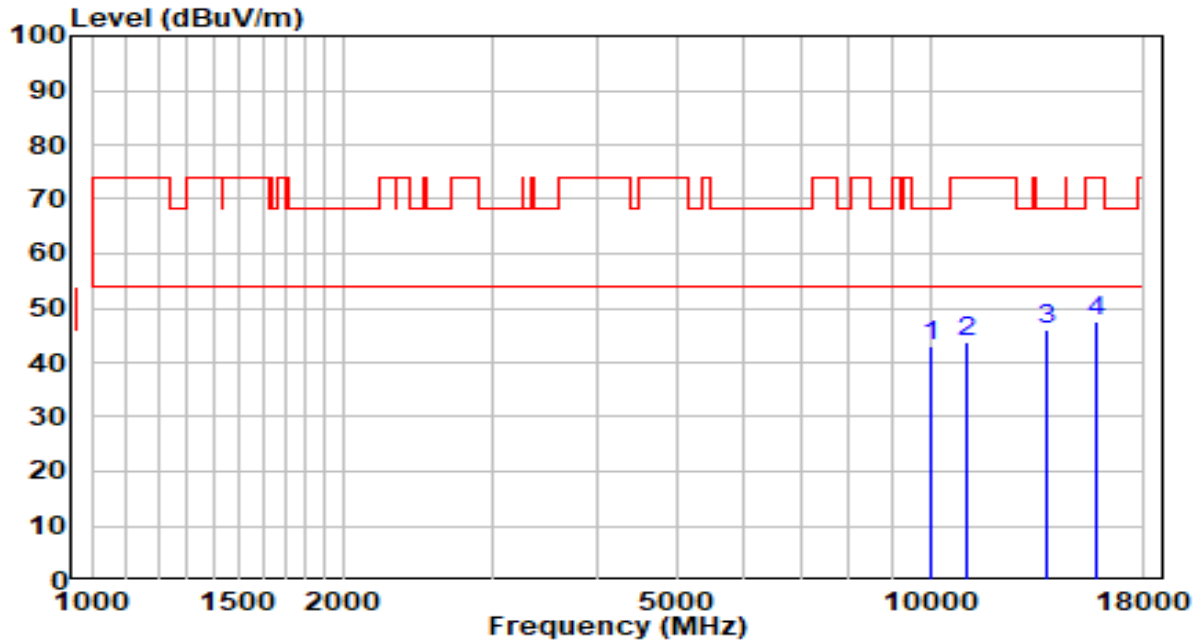


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10044.000	26.33	16.74	43.07	-25.13	68.20	Peak
2	11089.500	24.31	19.42	43.73	-30.27	74.00	Peak
3	* 13818.000	23.65	22.21	45.86	-22.34	68.20	Peak
4	15790.000	26.94	20.63	47.57	-26.43	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5240MHz by 802.11a	Test Voltage	AC 120V/60Hz

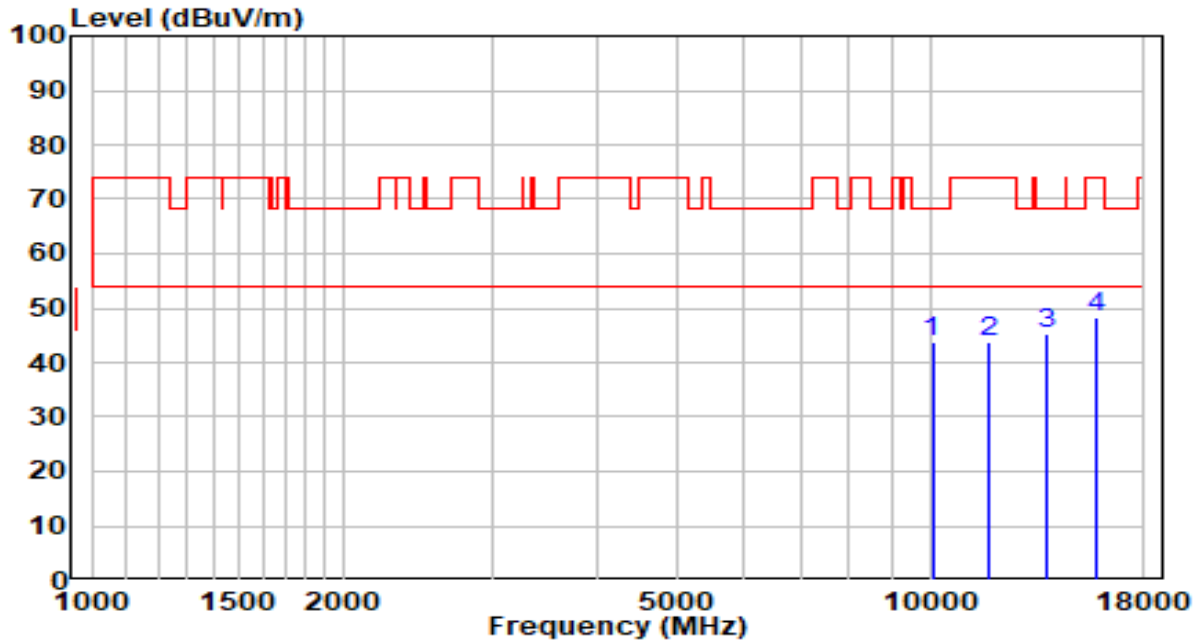


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10061.000	27.11	16.81	43.92	-24.28	68.20	Peak
2	11786.500	24.19	19.40	43.59	-30.41	74.00	Peak
3	* 13724.500	23.35	22.11	45.46	-22.74	68.20	Peak
4	15756.000	27.45	20.72	48.17	-25.83	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5240MHz by 802.11a	Test Voltage	AC 120V/60Hz

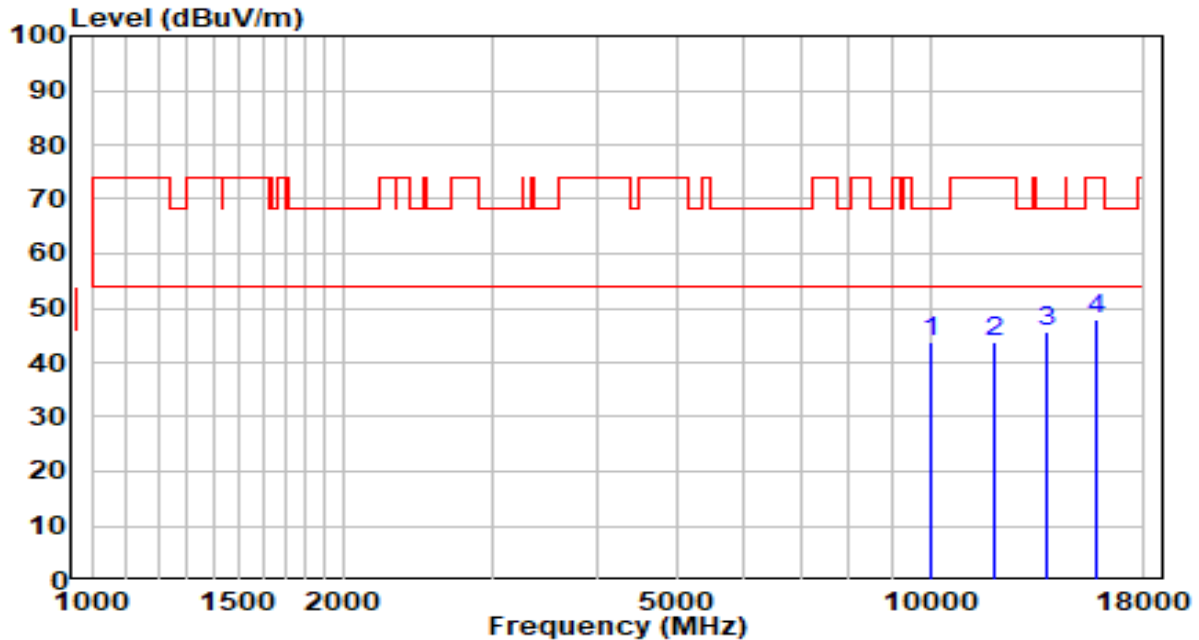


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10001.500	27.36	16.57	43.93	-24.27	68.20	Peak
2	11897.000	24.79	19.15	43.94	-30.06	74.00	Peak
3	* 13733.000	23.69	22.12	45.81	-22.39	68.20	Peak
4	15756.000	27.27	20.72	47.99	-26.01	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5260MHz by 802.11a	Test Voltage	AC 120V/60Hz

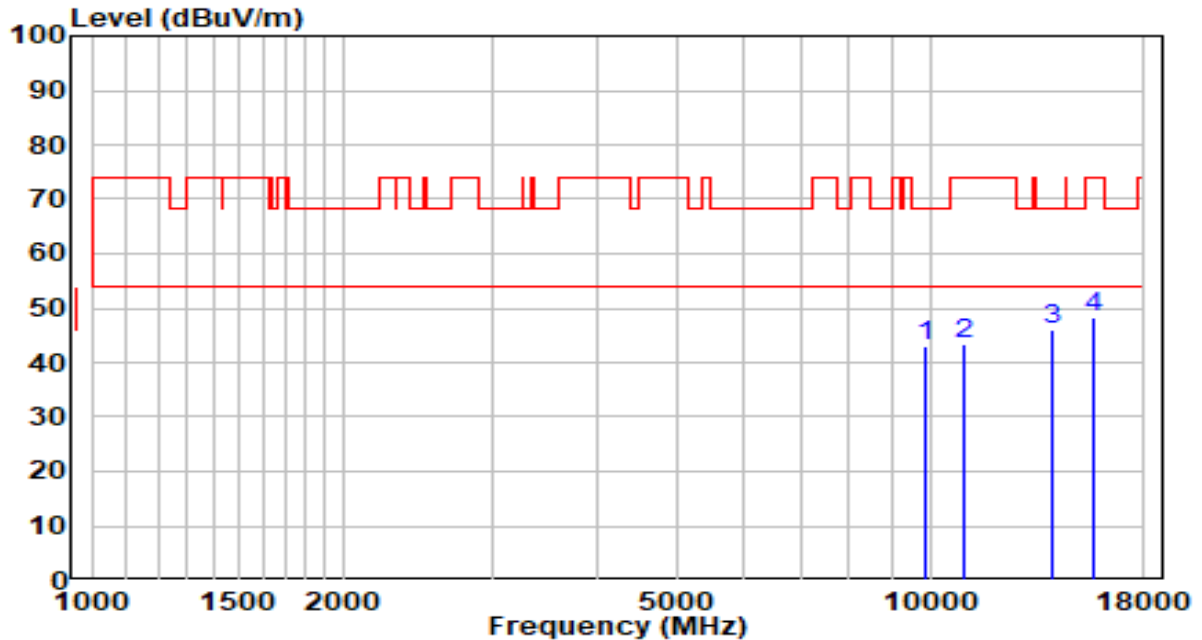


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9874.000	26.71	16.35	43.06	-25.14	68.20	Peak
2	11013.000	24.05	19.30	43.35	-30.65	74.00	Peak
3	* 14022.000	23.66	22.42	46.08	-22.12	68.20	Peak
4	15722.000	27.44	20.80	48.24	-25.76	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5260MHz by 802.11a	Test Voltage	AC 120V/60Hz

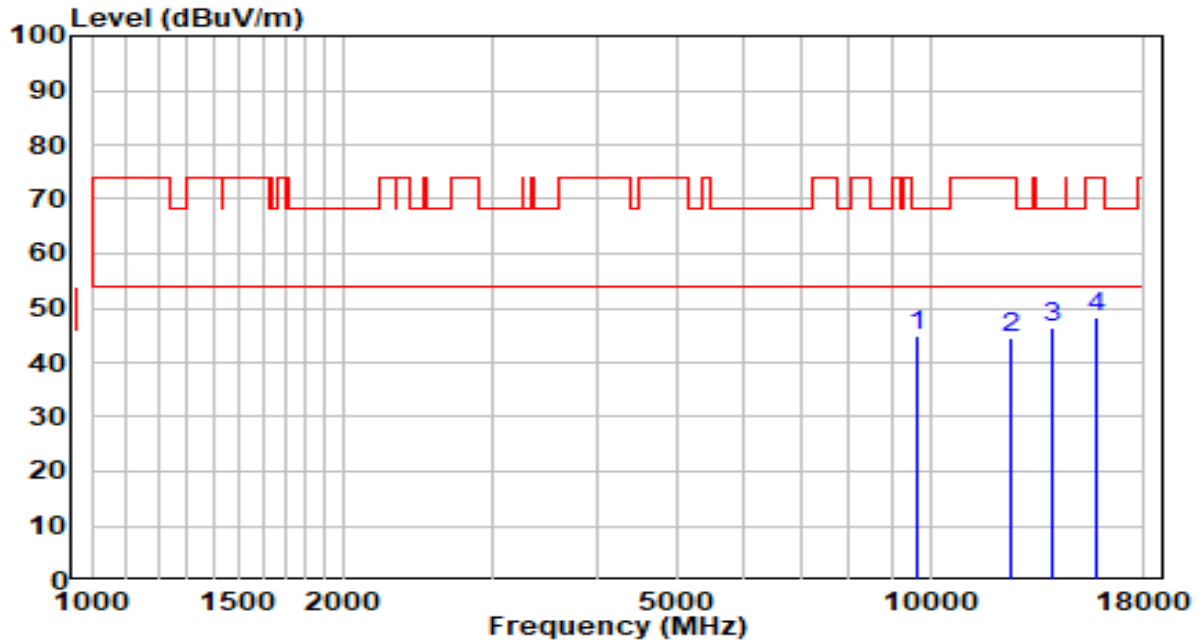


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9619.000	29.04	15.92	44.96	-23.24	68.20	Peak
2	12475.000	26.18	18.43	44.61	-29.39	74.00	Peak
3	* 14013.500	23.86	22.42	46.28	-21.92	68.20	Peak
4	15756.000	27.46	20.72	48.18	-25.82	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5300MHz by 802.11a	Test Voltage	AC 120V/60Hz

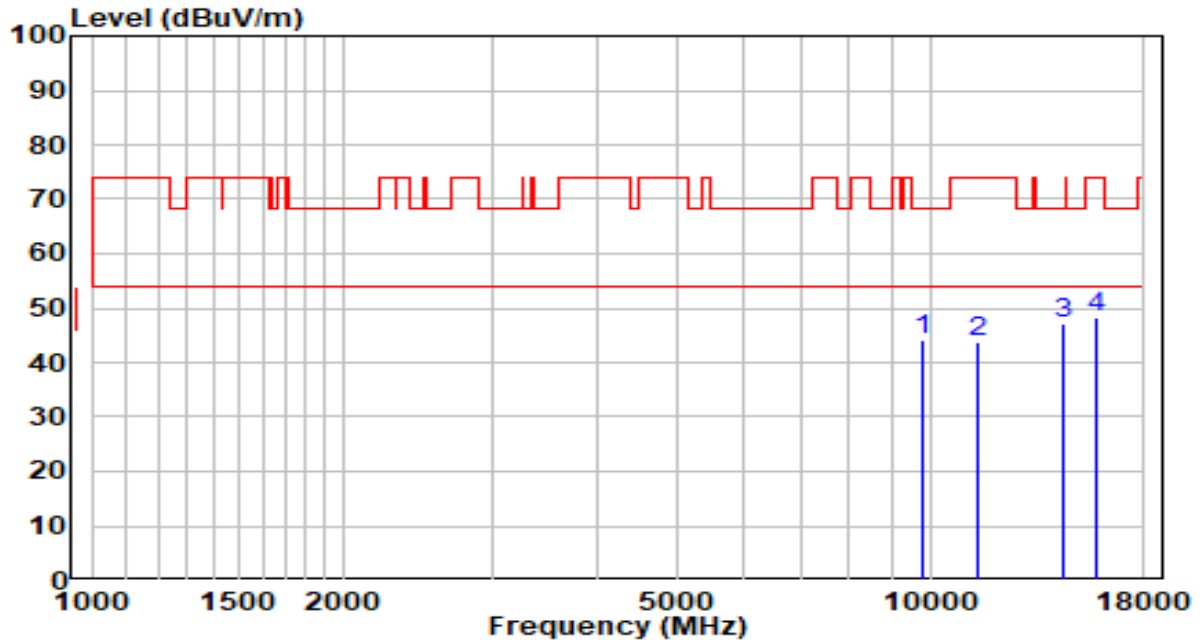


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9780.500	27.78	16.19	43.97	-24.23	68.20	Peak
2	11387.000	23.82	19.88	43.70	-30.30	74.00	Peak
3	* 14413.000	24.78	22.45	47.23	-20.97	68.20	Peak
4	15841.000	27.90	20.50	48.40	-25.60	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5300MHz by 802.11a	Test Voltage	AC 120V/60Hz

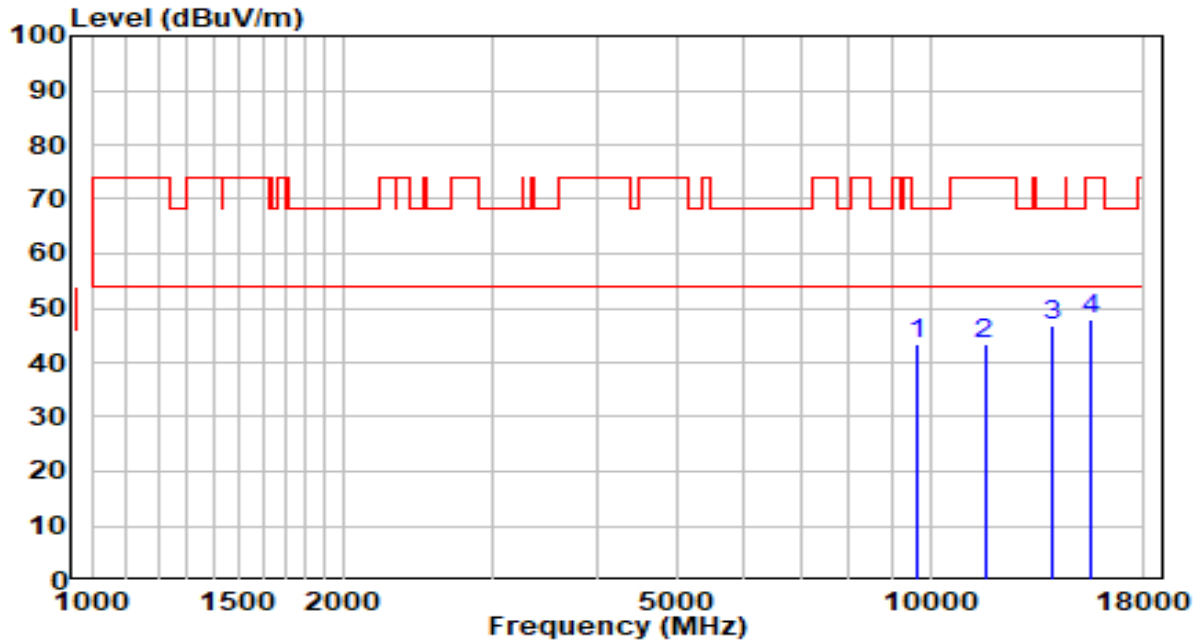


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9644.500	27.41	15.96	43.37	-24.83	68.20	Peak
2	11616.500	23.66	19.79	43.45	-30.55	74.00	Peak
3	* 14030.500	24.19	22.42	46.61	-21.59	68.20	Peak
4	15603.000	26.94	21.09	48.03	-25.97	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).



EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5320MHz by 802.11a	Test Voltage	AC 120V/60Hz

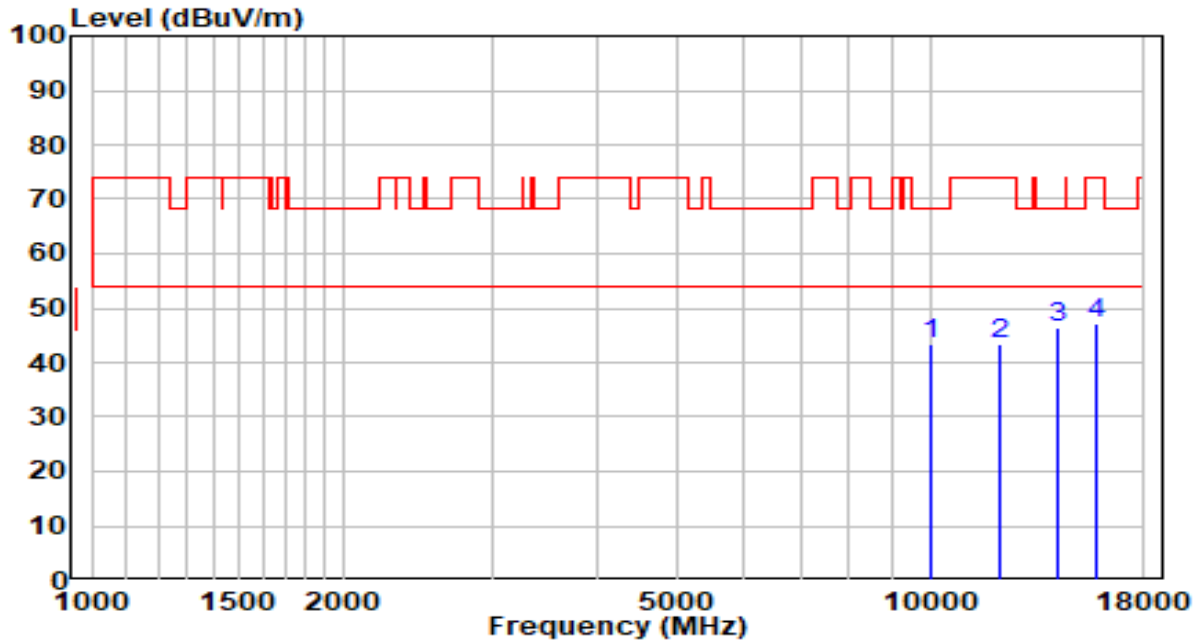


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10010.000	26.70	16.60	43.30	-24.90	68.20	Peak
2	12067.000	24.51	18.85	43.36	-30.64	74.00	Peak
3	* 14149.500	24.15	22.43	46.58	-21.62	68.20	Peak
4	15841.000	26.82	20.50	47.32	-26.68	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5320MHz by 802.11a	Test Voltage	AC 120V/60Hz

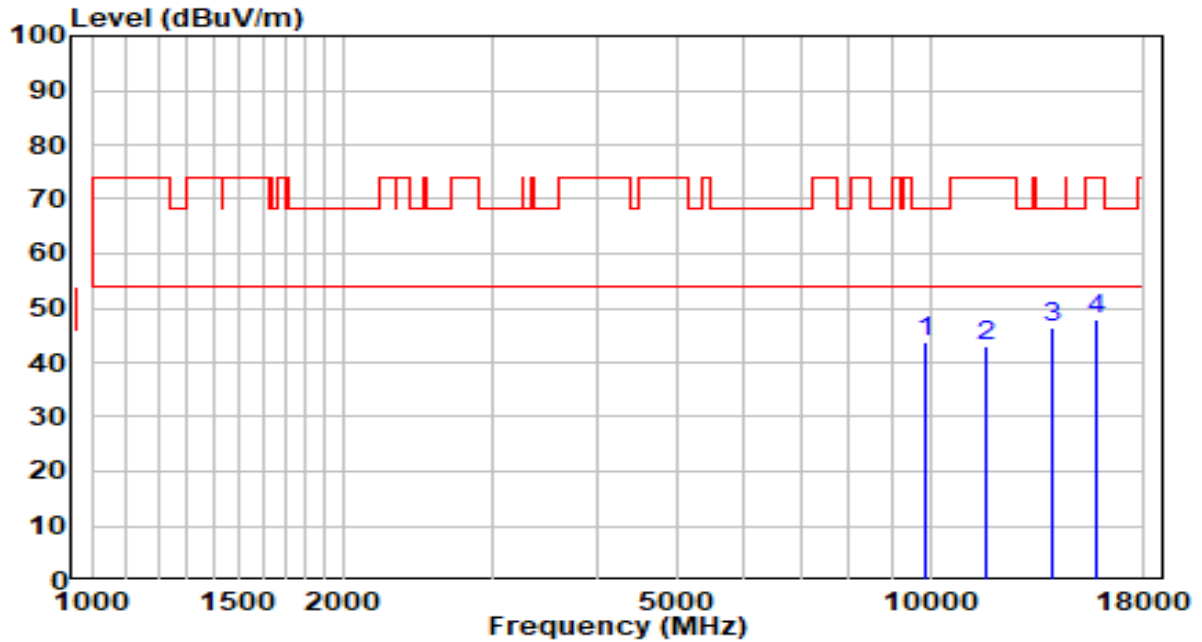


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9891.000	27.32	16.38	43.70	-24.50	68.20	Peak
2	11684.500	23.29	19.63	42.92	-31.08	74.00	Peak
3	* 13971.000	24.18	22.39	46.57	-21.63	68.20	Peak
4	15790.000	27.43	20.63	48.06	-25.94	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5500MHz by 802.11a	Test Voltage	AC 120V/60Hz

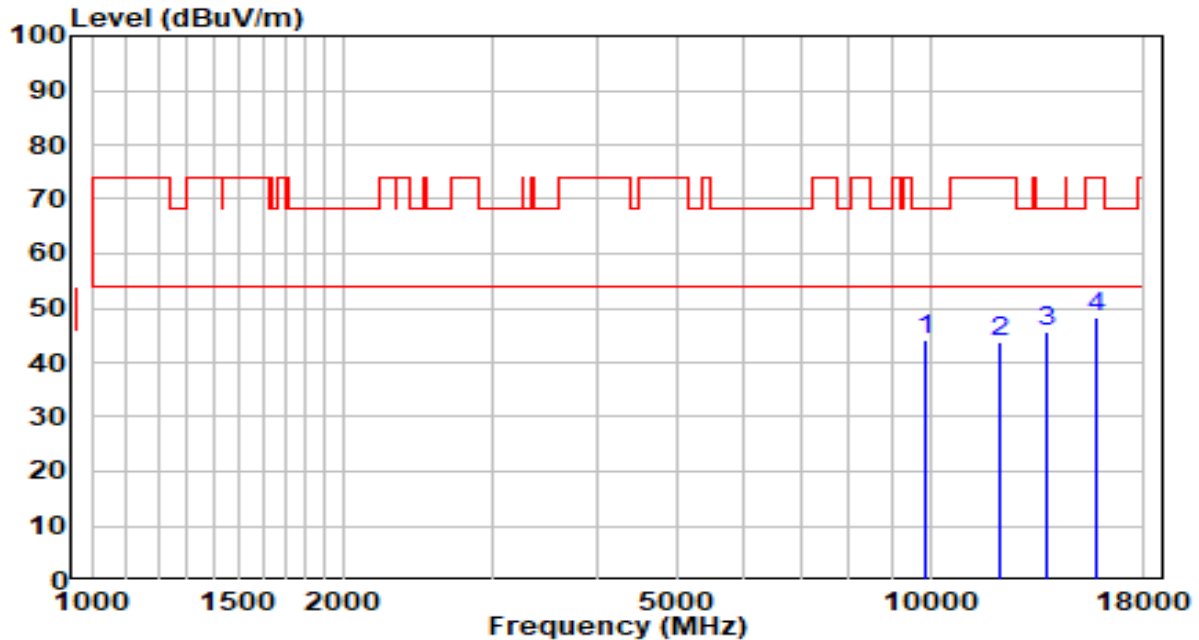


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9899.500	27.94	16.39	44.33	-23.87	68.20	Peak
2	12126.500	24.87	18.79	43.66	-30.34	74.00	Peak
3	* 13750.000	23.58	22.14	45.72	-22.48	68.20	Peak
4	15764.500	27.43	20.69	48.12	-25.88	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5500MHz by 802.11a	Test Voltage	AC 120V/60Hz

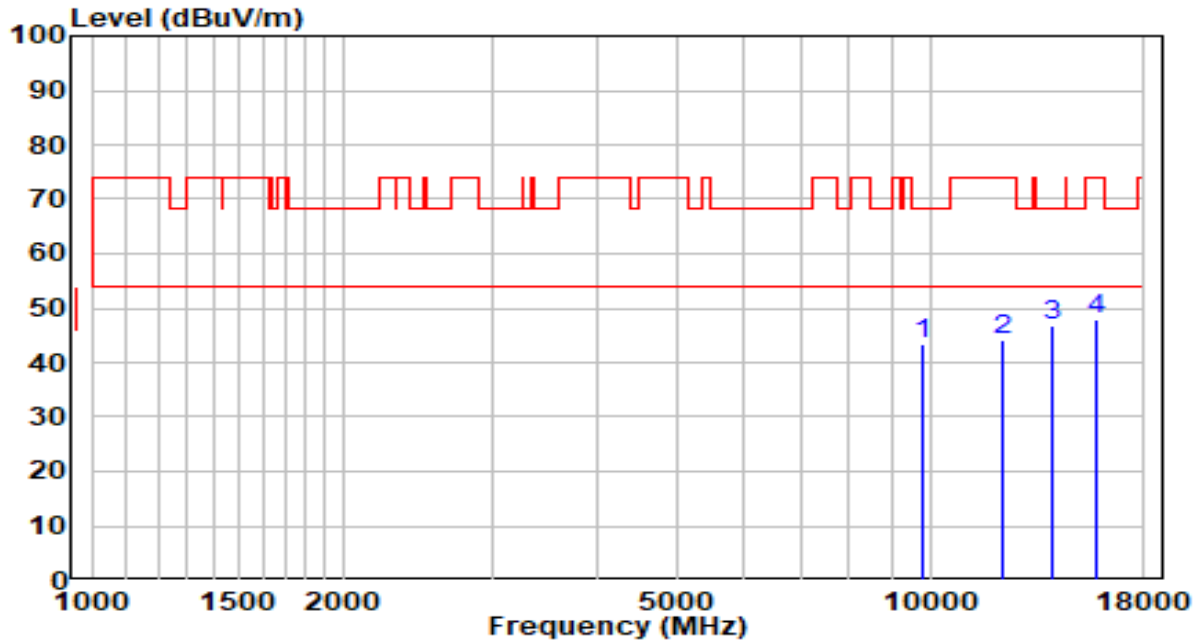


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9814.500	27.21	16.25	43.46	-24.74	68.20	Peak
2	12211.500	25.52	18.70	44.22	-29.78	74.00	Peak
3	* 14022.000	24.19	22.42	46.61	-21.59	68.20	Peak
4	15730.500	27.30	20.78	48.08	-25.92	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5580MHz by 802.11a	Test Voltage	AC 120V/60Hz

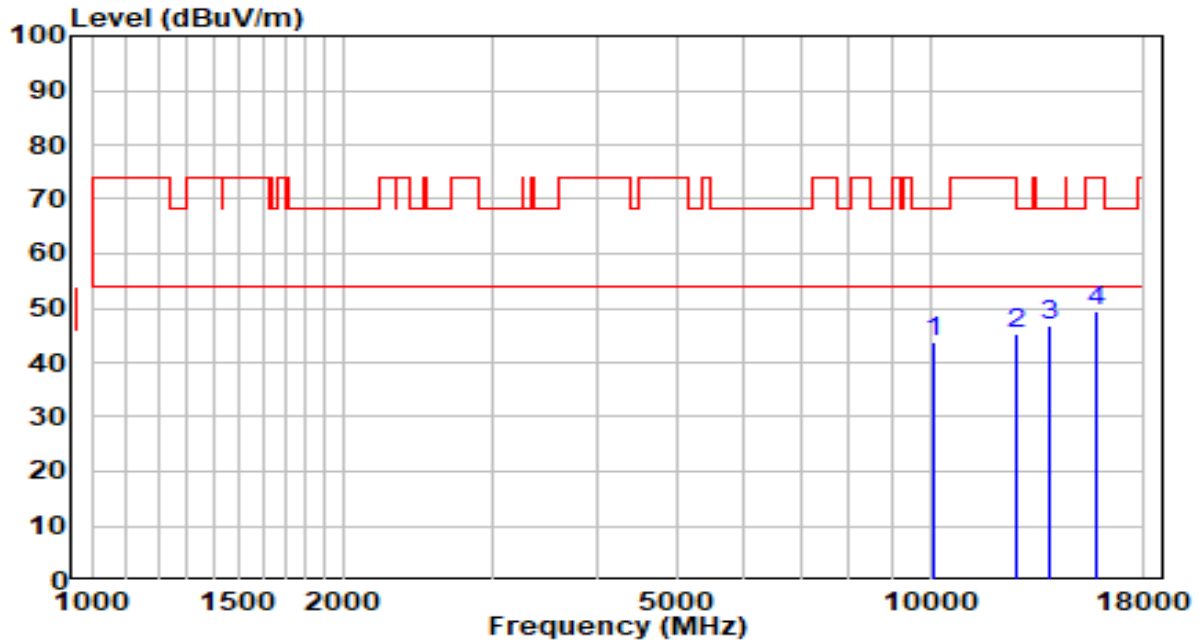


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10069.500	27.04	16.84	43.88	-24.32	68.20	Peak
2	12687.500	26.38	18.96	45.34	-28.66	74.00	Peak
3	* 13877.500	24.35	22.28	46.63	-21.57	68.20	Peak
4	15773.000	28.67	20.67	49.34	-24.66	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5580MHz by 802.11a	Test Voltage	AC 120V/60Hz

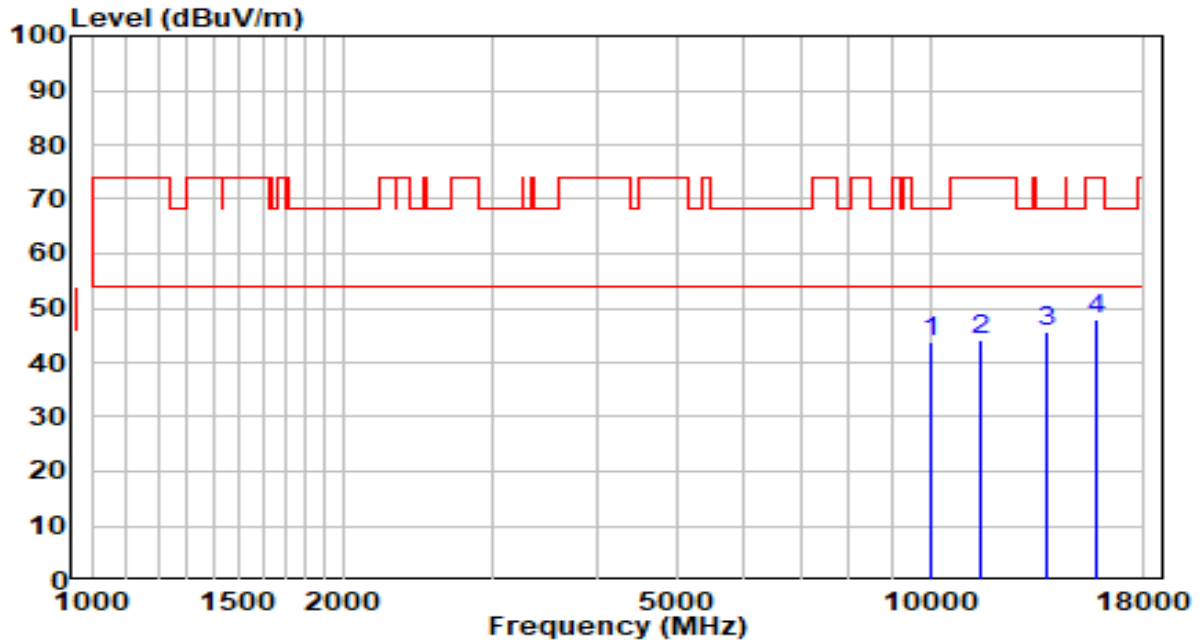


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10001.500	27.08	16.57	43.65	-24.55	68.20	Peak
2	11446.500	24.05	19.97	44.02	-29.98	74.00	Peak
3	* 13818.000	23.45	22.21	45.66	-22.54	68.20	Peak
4	15756.000	27.30	20.72	48.02	-25.98	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5700MHz by 802.11a	Test Voltage	AC 120V/60Hz

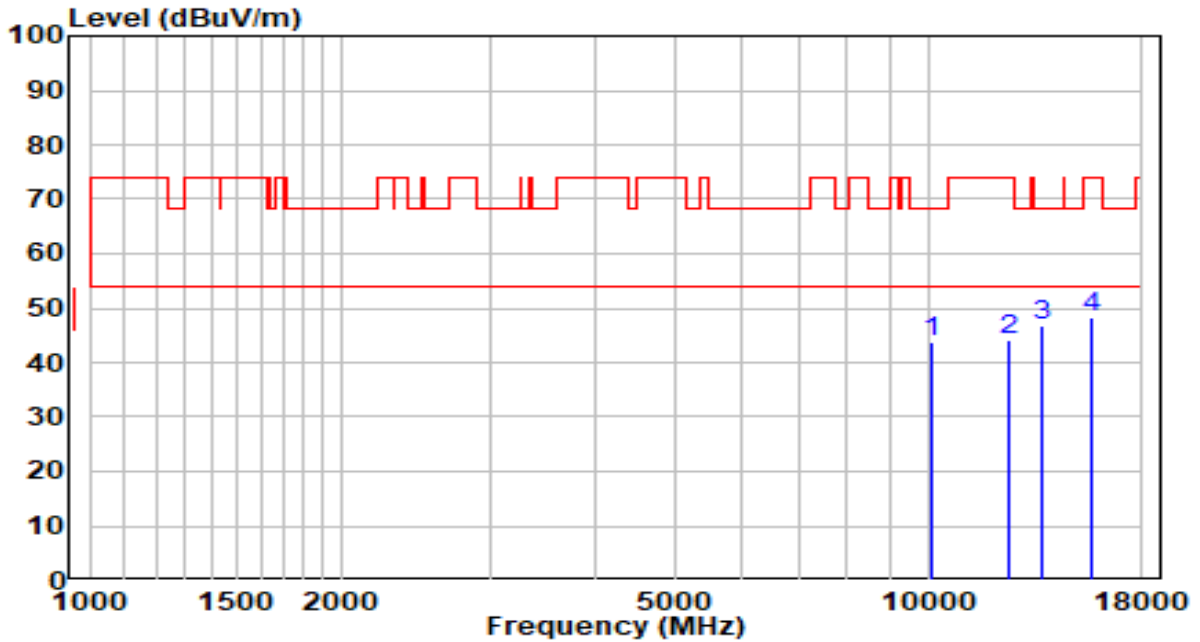


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10120.500	26.91	17.04	43.95	-24.25	68.20	Peak
2	12441.000	25.75	18.47	44.22	-29.78	74.00	Peak
3	* 13673.500	24.67	22.05	46.72	-21.48	68.20	Peak
4	15722.000	27.38	20.80	48.18	-25.82	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5700MHz by 802.11a	Test Voltage	AC 120V/60Hz

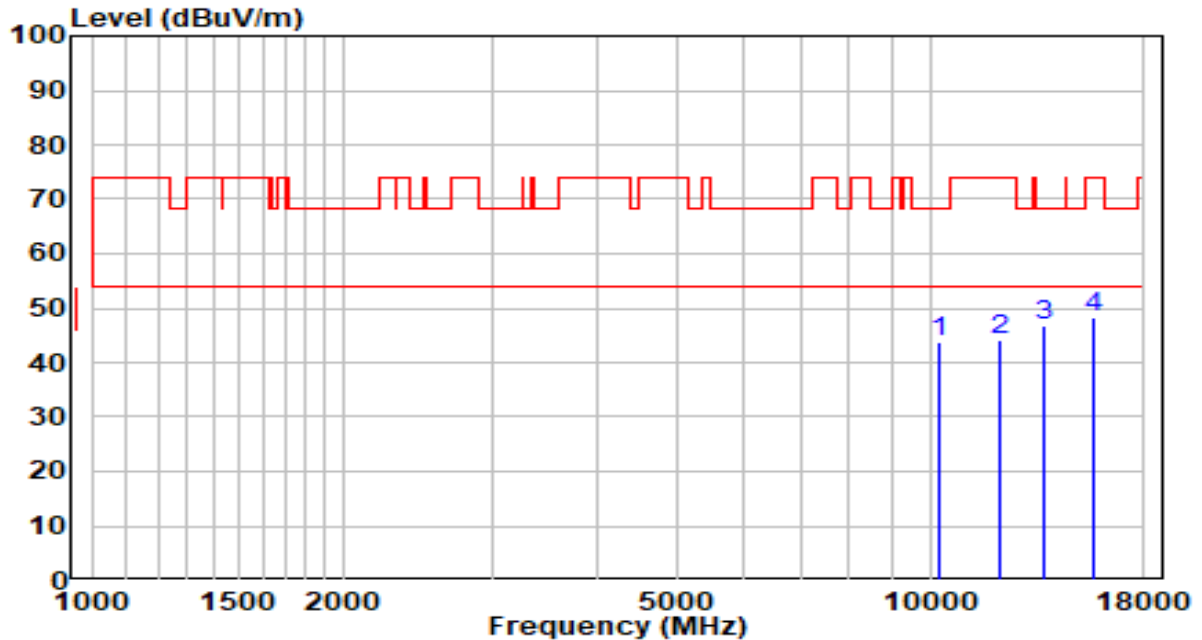


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10265.000	26.29	17.63	43.92	-24.28	68.20	Peak
2	12075.500	25.43	18.84	44.27	-29.73	74.00	Peak
3	* 13690.500	24.91	22.07	46.98	-21.22	68.20	Peak
4	15645.500	27.20	20.99	48.19	-25.81	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).



EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5720MHz by 802.11a	Test Voltage	AC 120V/60Hz

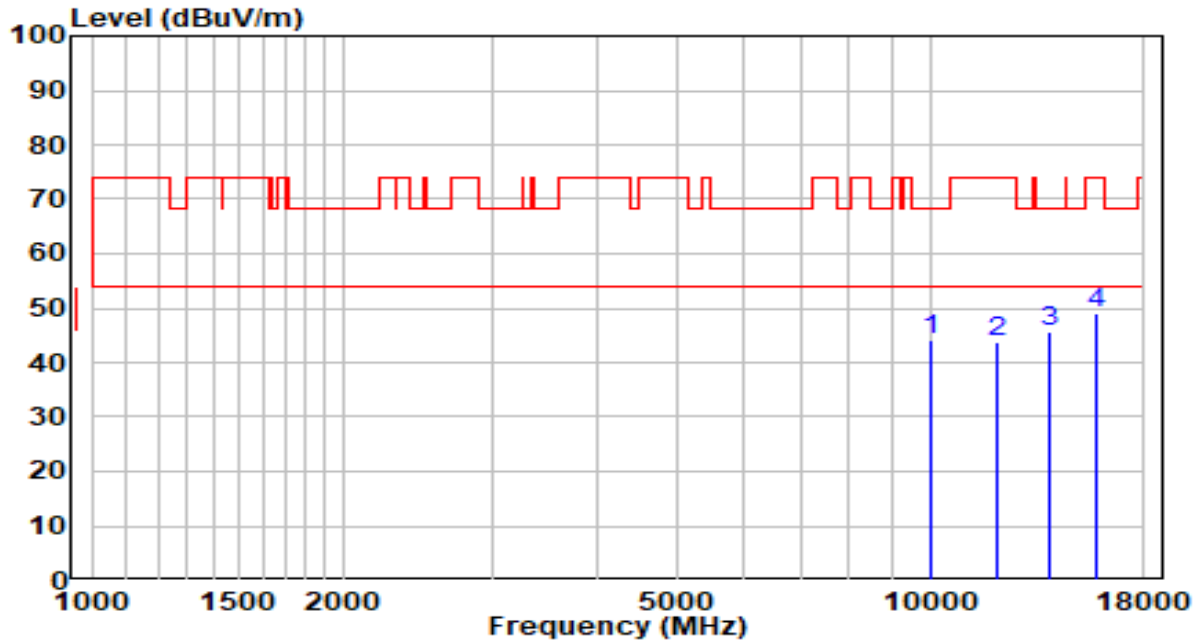


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10018.500	27.37	16.63	44.00	-24.20	68.20	Peak
2	12007.500	24.98	18.91	43.89	-30.11	74.00	Peak
3	* 13843.500	23.30	22.24	45.54	-22.66	68.20	Peak
4	15747.500	28.24	20.74	48.98	-25.02	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5720MHz by 802.11a	Test Voltage	AC 120V/60Hz

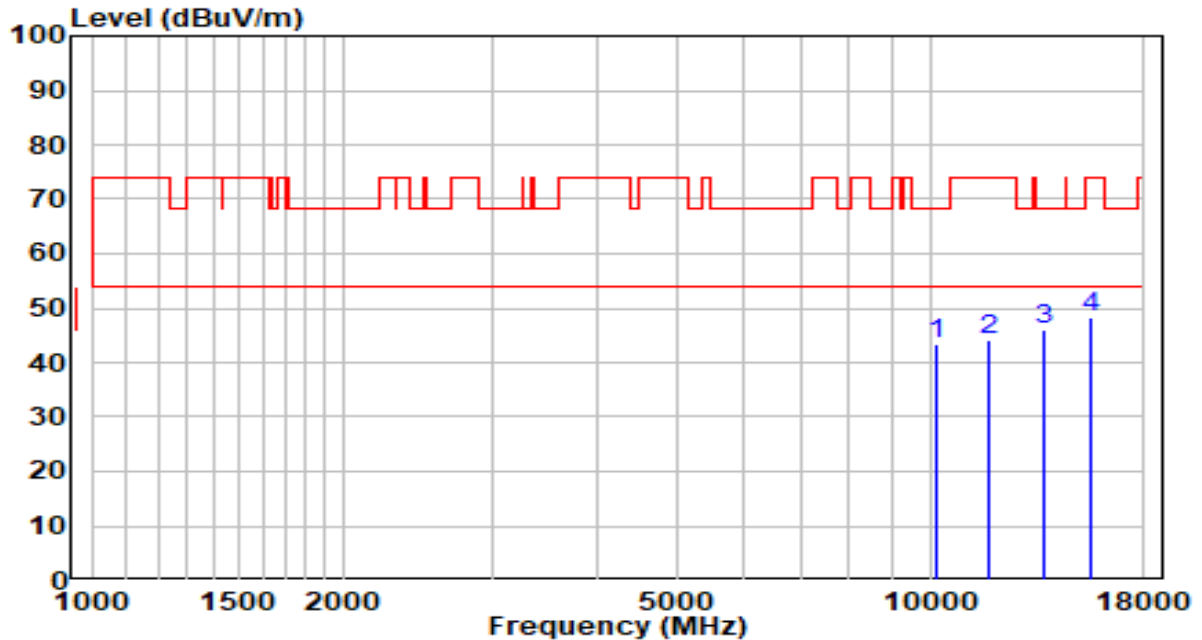


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10163.000	26.19	17.22	43.41	-24.79	68.20	Peak
2	11718.500	24.72	19.56	44.28	-29.72	74.00	Peak
3	* 13673.500	23.82	22.05	45.87	-22.33	68.20	Peak
4	15552.000	27.16	21.22	48.38	-25.62	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5745MHz by 802.11a	Test Voltage	AC 120V/60Hz

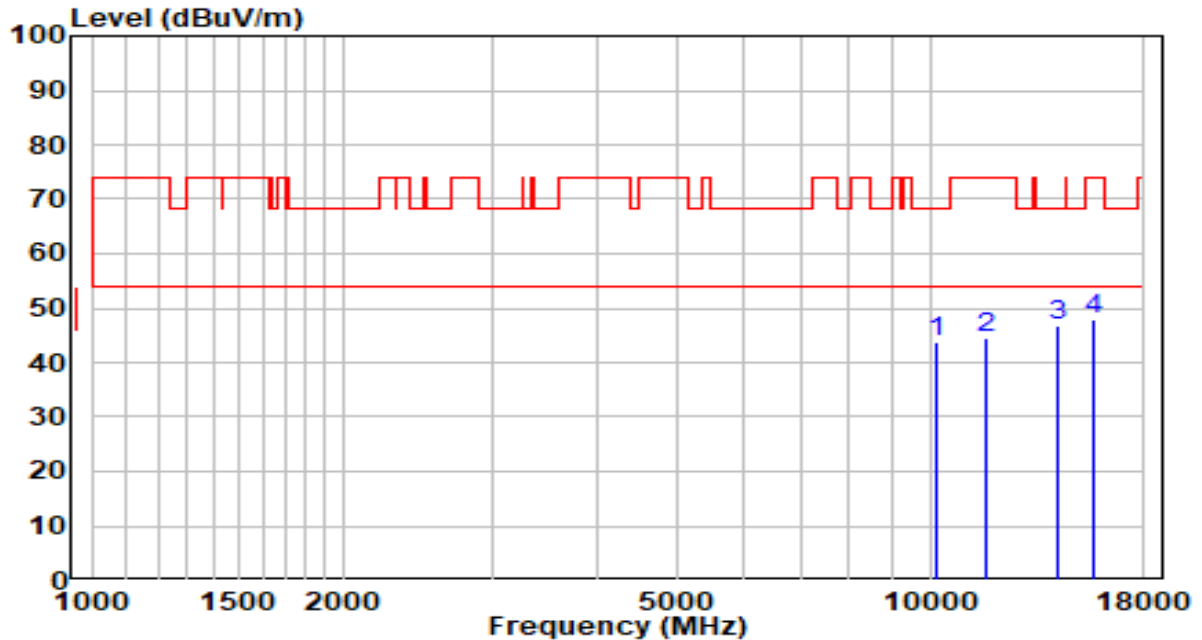


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10205.500	26.22	17.39	43.61	-24.59	68.20	Peak
2	11642.000	24.72	19.73	44.45	-29.55	74.00	Peak
3	* 14234.500	24.34	22.44	46.78	-21.42	68.20	Peak
4	15696.500	27.21	20.86	48.07	-25.93	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5745MHz by 802.11a	Test Voltage	AC 120V/60Hz

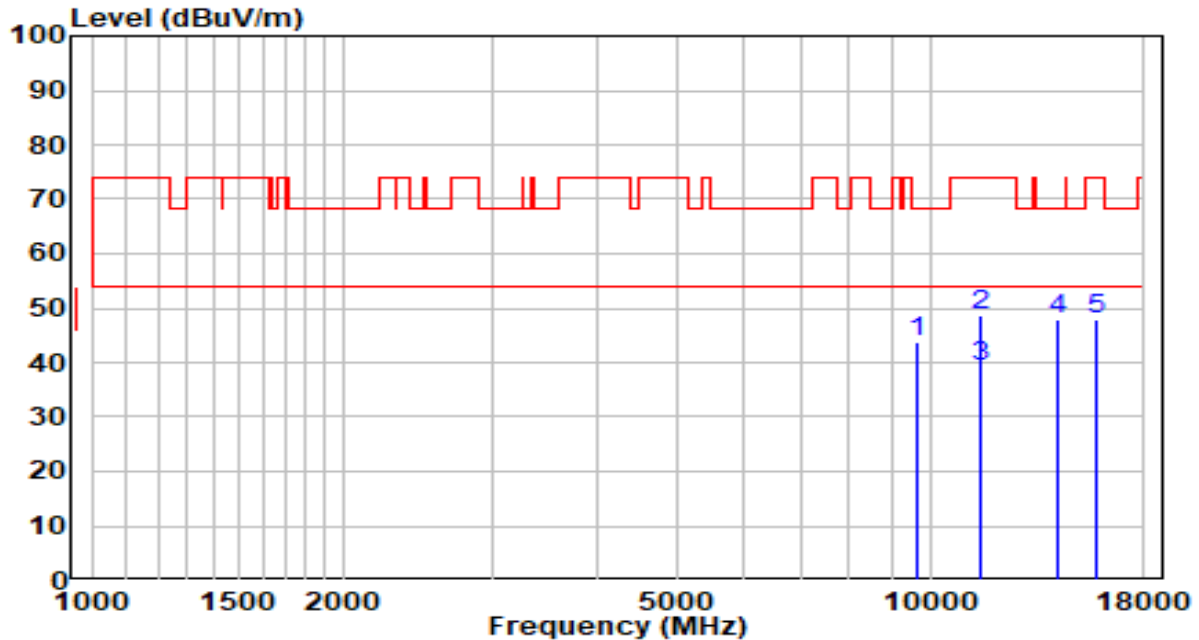


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9661.500	27.60	15.99	43.59	-24.61	68.20	Peak
2	11489.000	28.53	20.03	48.56	-25.44	74.00	Peak
3	* 11489.000	19.14	20.03	39.17	-14.83	54.00	Average
4	14234.500	25.35	22.44	47.79	-20.41	68.20	Peak
5	15832.500	27.27	20.53	47.80	-26.20	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5785MHz by 802.11a	Test Voltage	AC 120V/60Hz

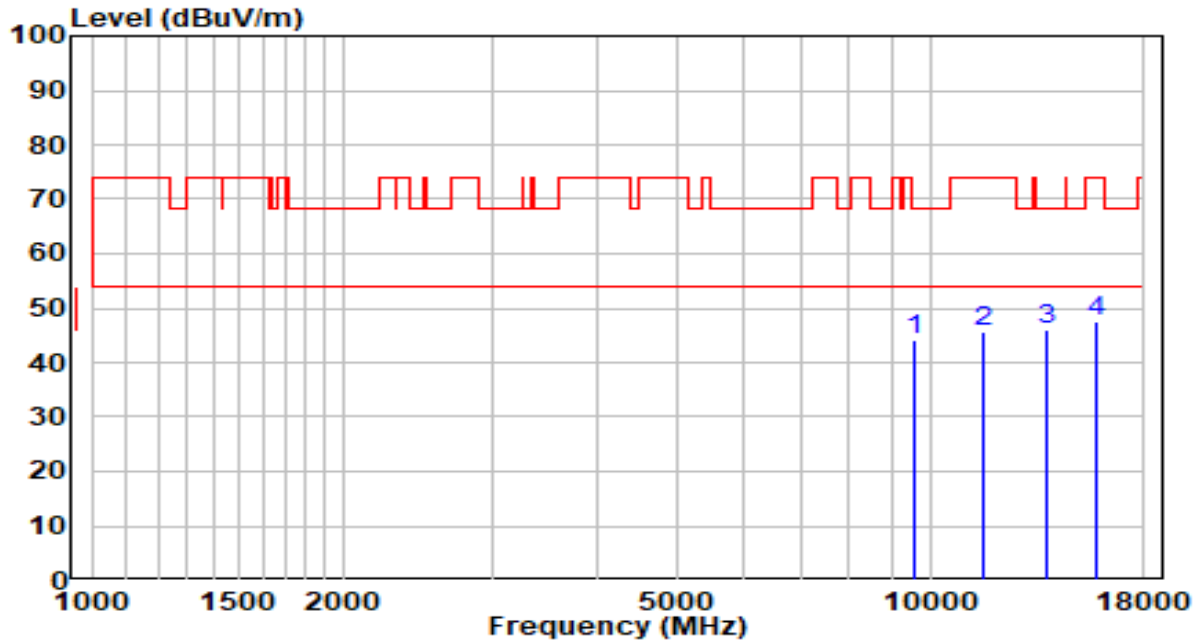


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9610.500	28.36	15.91	44.27	-23.93	68.20	Peak
2	11574.000	25.89	19.88	45.77	-28.23	74.00	Peak
3	* 13724.500	24.01	22.11	46.12	-22.08	68.20	Peak
4	15747.500	26.85	20.74	47.59	-26.41	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5785MHz by 802.11a	Test Voltage	AC 120V/60Hz

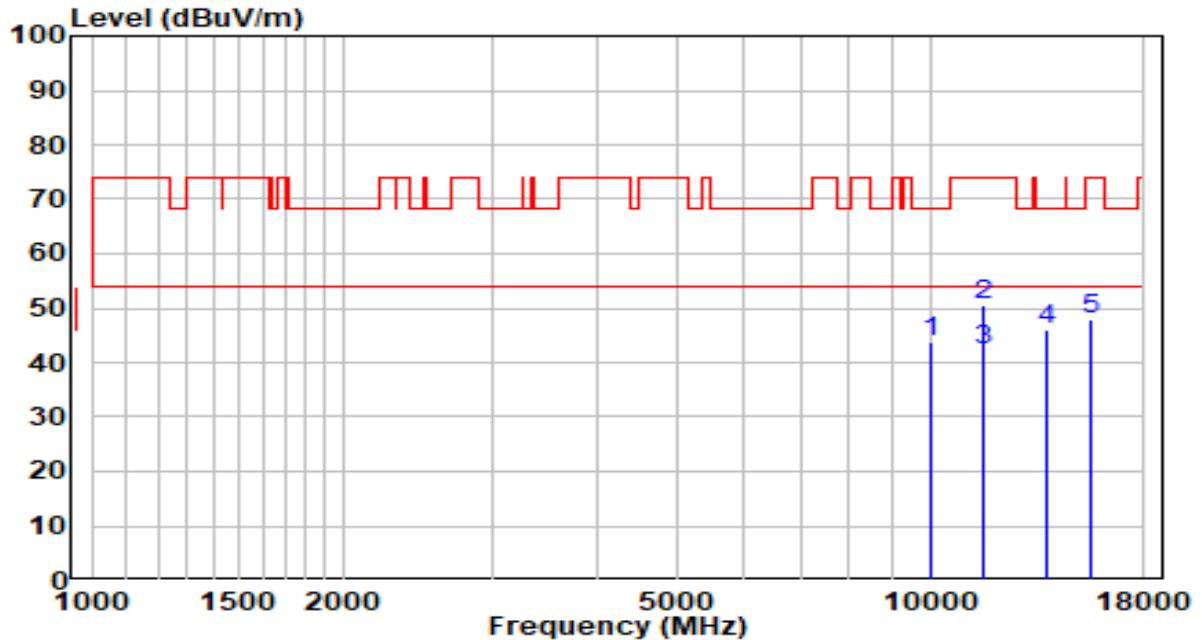


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10001.500	27.08	16.57	43.65	-24.55	68.20	Peak
2	11565.500	30.58	19.90	50.48	-23.52	74.00	Peak
3	* 11565.500	22.21	19.90	42.11	-11.89	54.00	Average
4	13784.000	23.85	22.18	46.03	-22.17	68.20	Peak
5	15560.500	26.54	21.20	47.74	-26.26	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5825MHz by 802.11a	Test Voltage	AC 120V/60Hz

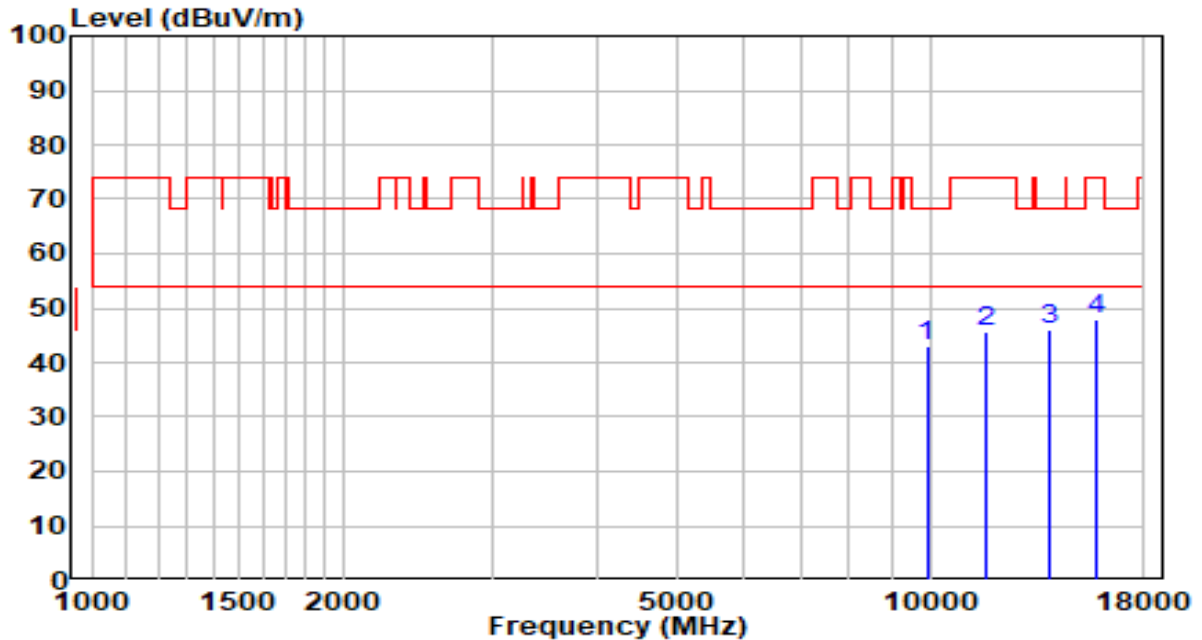


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9908.000	26.79	16.41	43.20	-25.00	68.20	Peak
2	11642.000	25.86	19.73	45.59	-28.41	74.00	Peak
3	* 13852.000	23.78	22.25	46.03	-22.17	68.20	Peak
4	15747.500	27.27	20.74	48.01	-25.99	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5825MHz by 802.11a	Test Voltage	AC 120V/60Hz

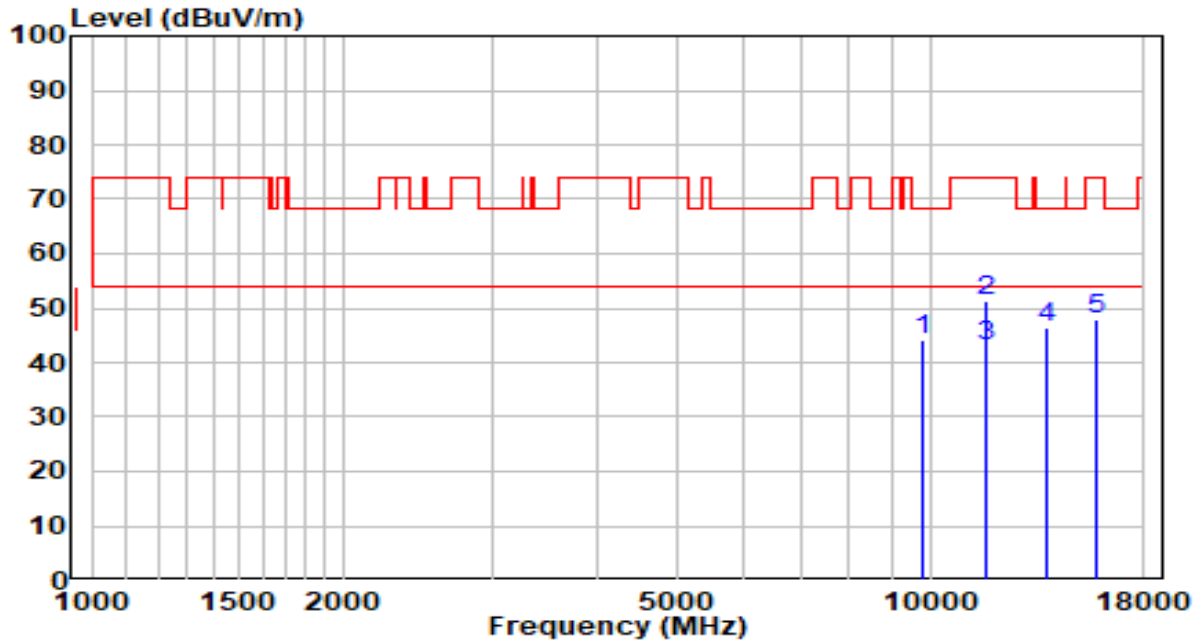


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9797.500	27.91	16.22	44.13	-24.07	68.20	Peak
2	11642.000	31.63	19.73	51.36	-22.64	74.00	Peak
3	* 11642.000	23.41	19.73	43.14	-10.86	54.00	Average
4	13750.000	24.24	22.14	46.38	-21.82	68.20	Peak
5	15773.000	27.30	20.67	47.97	-26.03	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).



EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

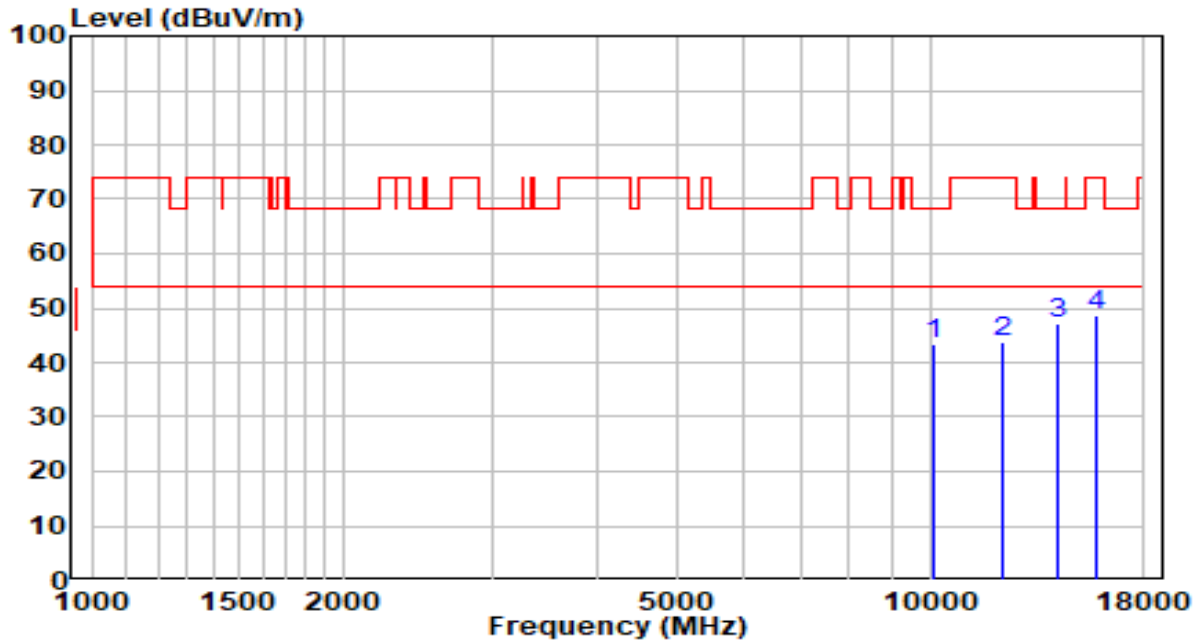


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10069.500	26.71	16.84	43.55	-24.65	68.20	Peak
2	12177.500	25.13	18.74	43.87	-30.13	74.00	Peak
3	* 14243.000	24.57	22.44	47.01	-21.19	68.20	Peak
4	15756.000	27.79	20.72	48.51	-25.49	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

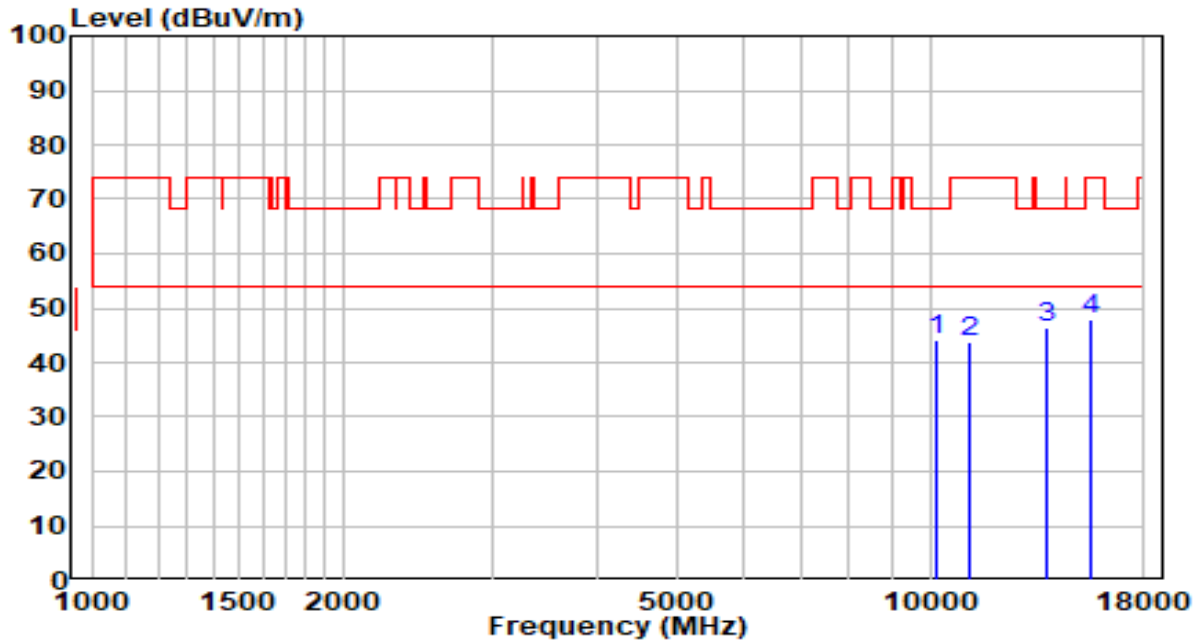


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10171.500	26.93	17.25	44.18	-24.02	68.20	Peak
2	11115.000	24.24	19.46	43.70	-30.30	74.00	Peak
3	* 13818.000	24.19	22.21	46.40	-21.80	68.20	Peak
4	15577.500	26.89	21.16	48.05	-25.95	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5220MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

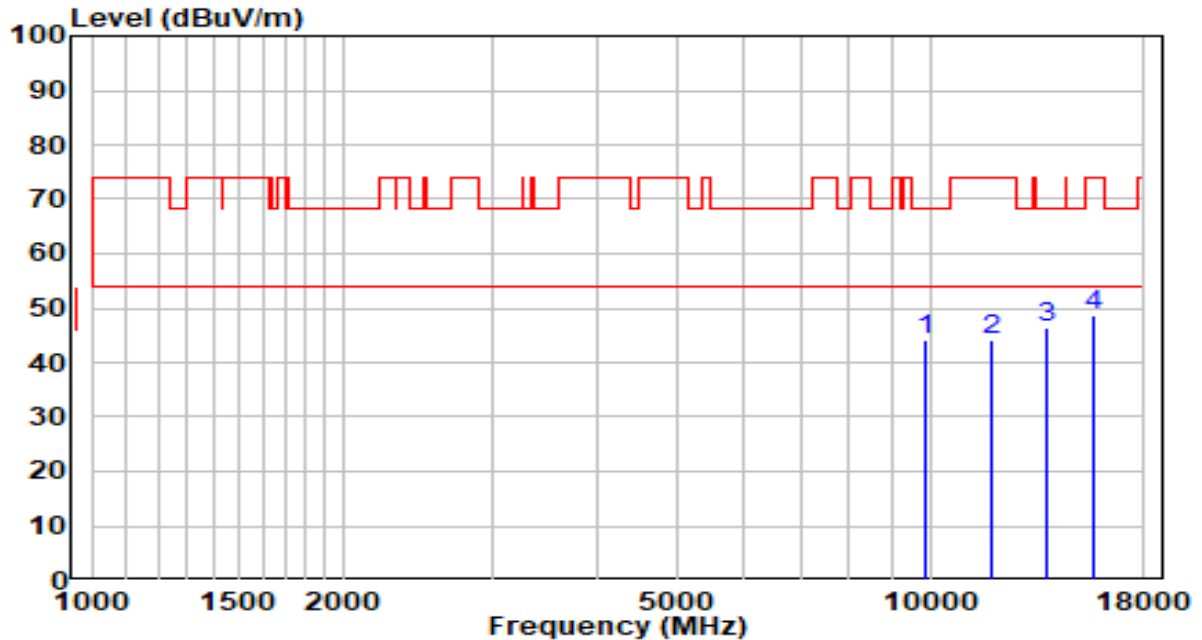


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9848.500	27.92	16.31	44.23	-23.97	68.20	Peak
2	11880.000	24.83	19.19	44.02	-29.98	74.00	Peak
3	* 13784.000	24.33	22.18	46.51	-21.69	68.20	Peak
4	15705.000	27.76	20.84	48.60	-25.40	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5220MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

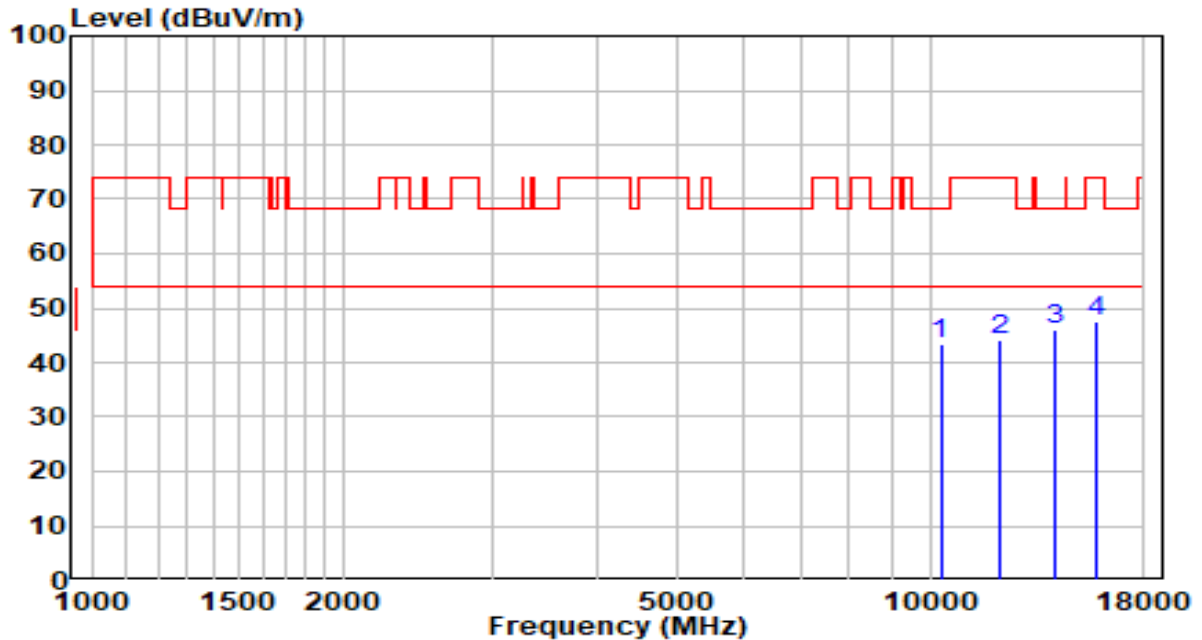


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10290.500	25.68	17.73	43.41	-24.79	68.20	Peak
2	12075.500	25.39	18.84	44.23	-29.77	74.00	Peak
3	* 14064.500	23.46	22.42	45.88	-22.32	68.20	Peak
4	15781.500	26.89	20.65	47.54	-26.46	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5240MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

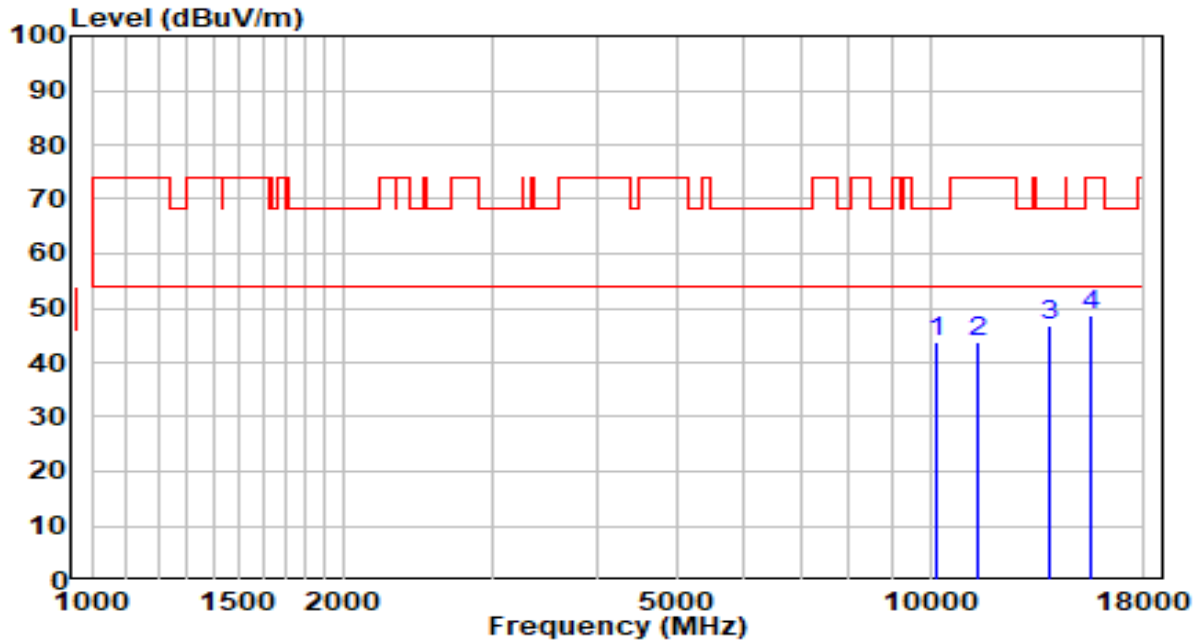


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10188.500	26.39	17.32	43.71	-24.49	68.20	Peak
2	11395.500	24.01	19.89	43.90	-30.10	74.00	Peak
3	* 13903.000	24.41	22.31	46.72	-21.48	68.20	Peak
4	15526.500	27.47	21.28	48.75	-25.25	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5240MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

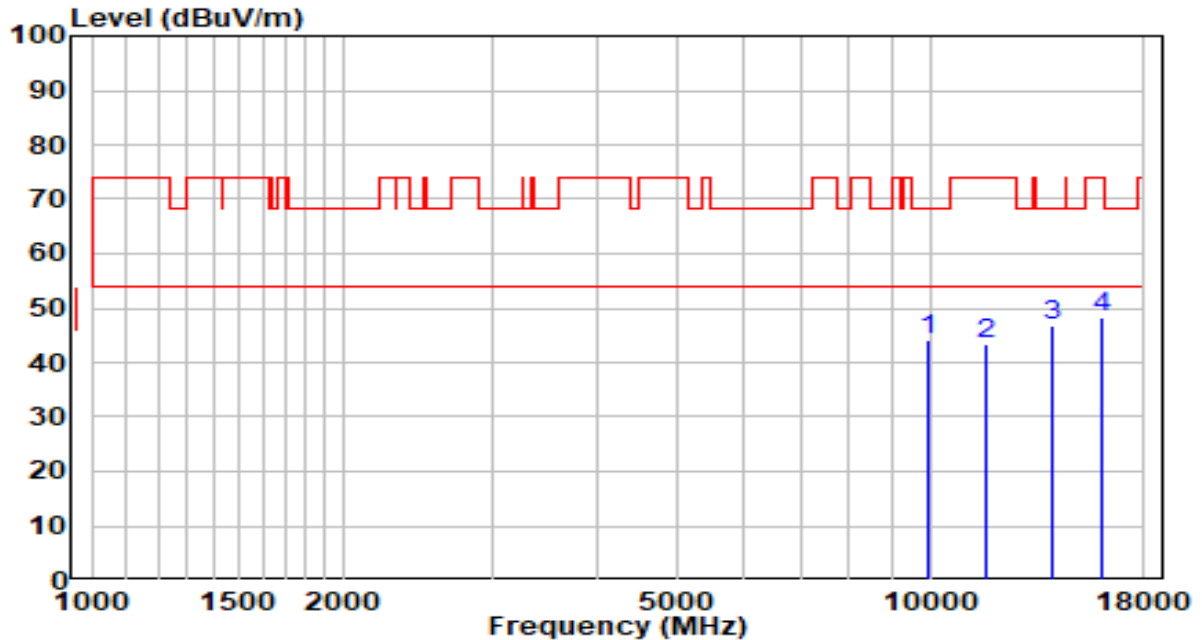


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9959.000	27.67	16.49	44.16	-24.04	68.20	Peak
2	11625.000	23.61	19.77	43.38	-30.62	74.00	Peak
3	* 14022.000	24.44	22.42	46.86	-21.34	68.20	Peak
4	16011.000	28.12	20.14	48.26	-25.74	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5260MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

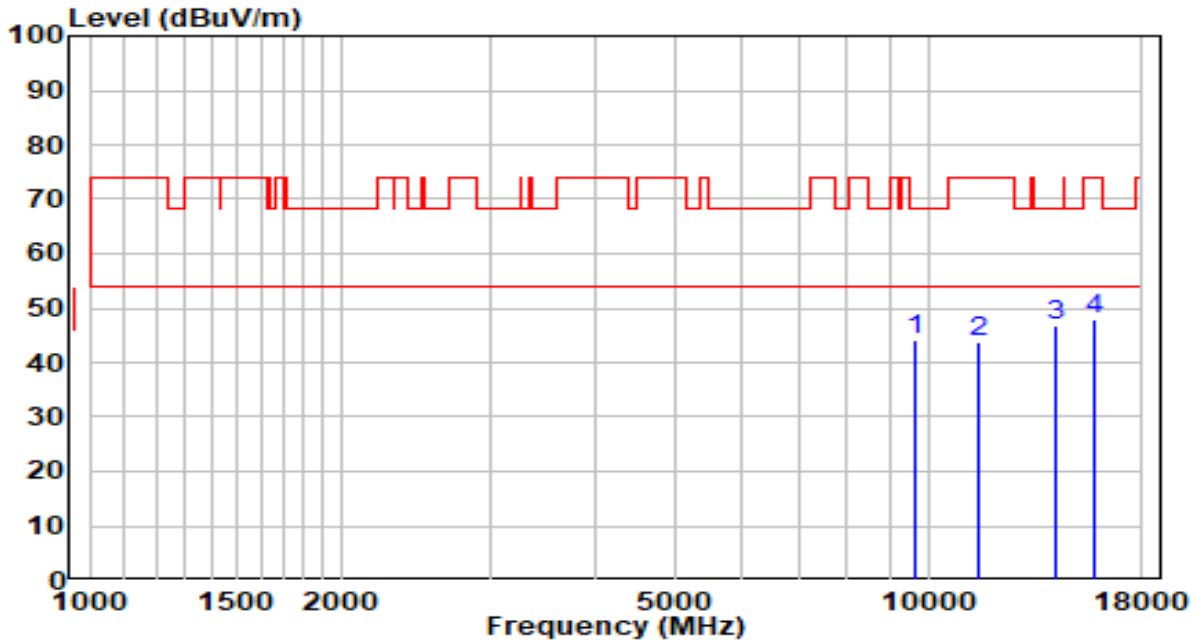


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9627.500	28.25	15.93	44.18	-24.02	68.20	Peak
2	11489.000	23.76	20.03	43.79	-30.21	74.00	Peak
3	* 14149.500	24.40	22.43	46.83	-21.37	68.20	Peak
4	15756.000	27.28	20.72	48.00	-26.00	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5260MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

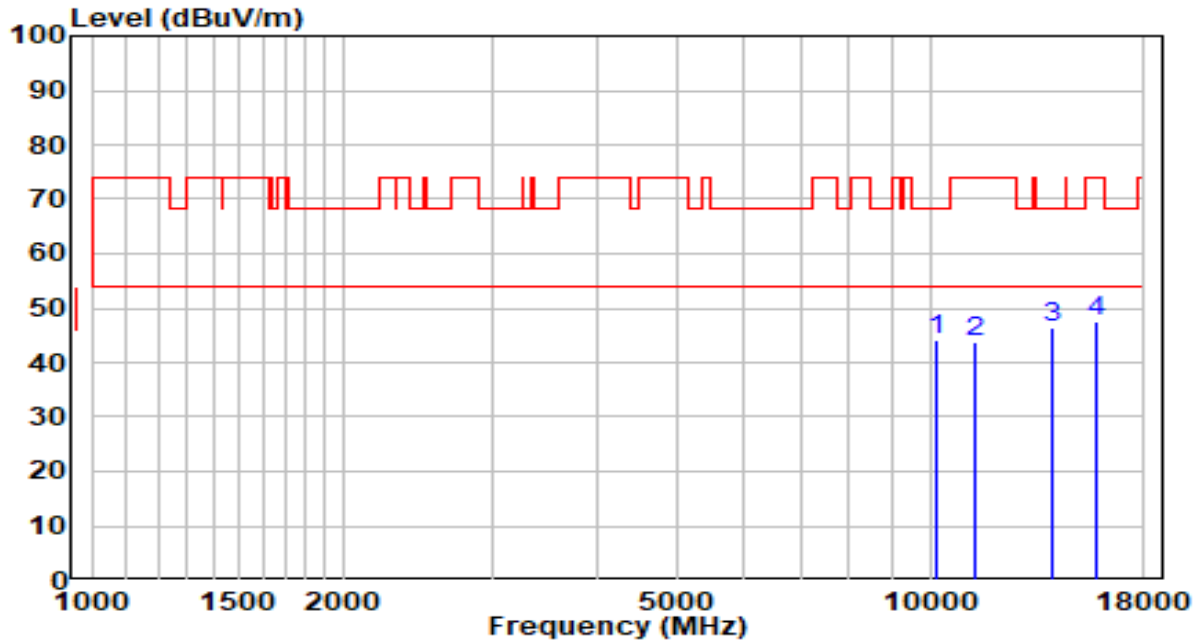


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10188.500	26.67	17.32	43.99	-24.21	68.20	Peak
2	11285.000	23.88	19.72	43.60	-30.40	74.00	Peak
3	* 14030.500	23.84	22.42	46.26	-21.94	68.20	Peak
4	15832.500	27.01	20.53	47.54	-26.46	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).



EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5300MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

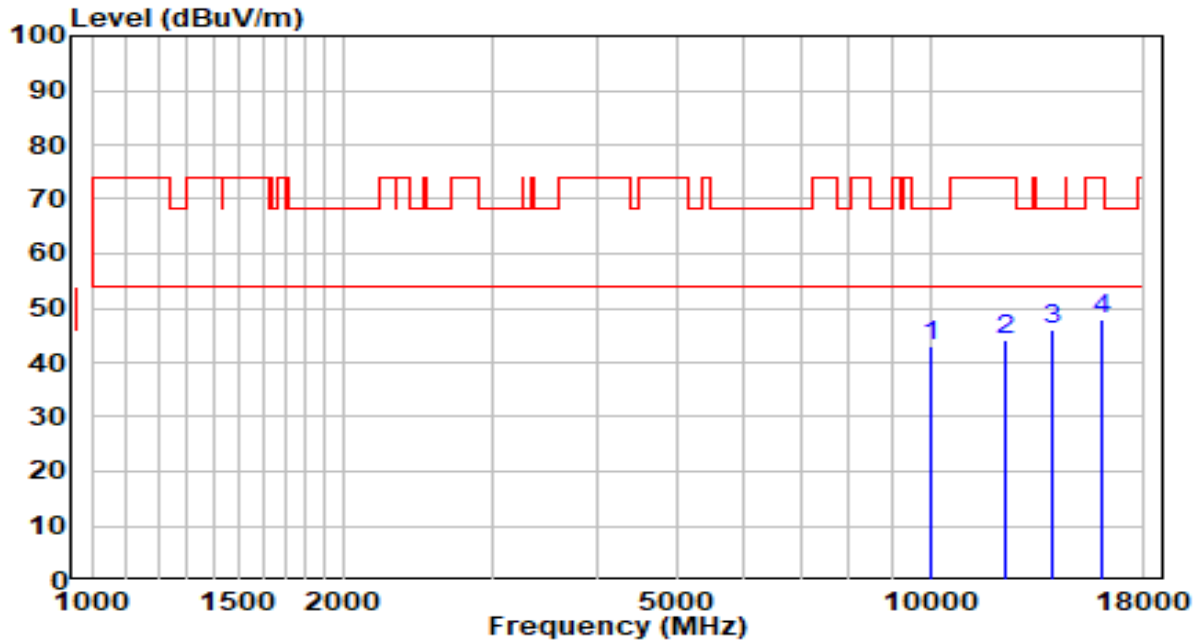


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10018.500	26.45	16.63	43.08	-25.12	68.20	Peak
2	12305.000	25.65	18.61	44.26	-29.74	74.00	Peak
3	* 14013.500	23.70	22.42	46.12	-22.08	68.20	Peak
4	16011.000	27.92	20.14	48.06	-25.94	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5300MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

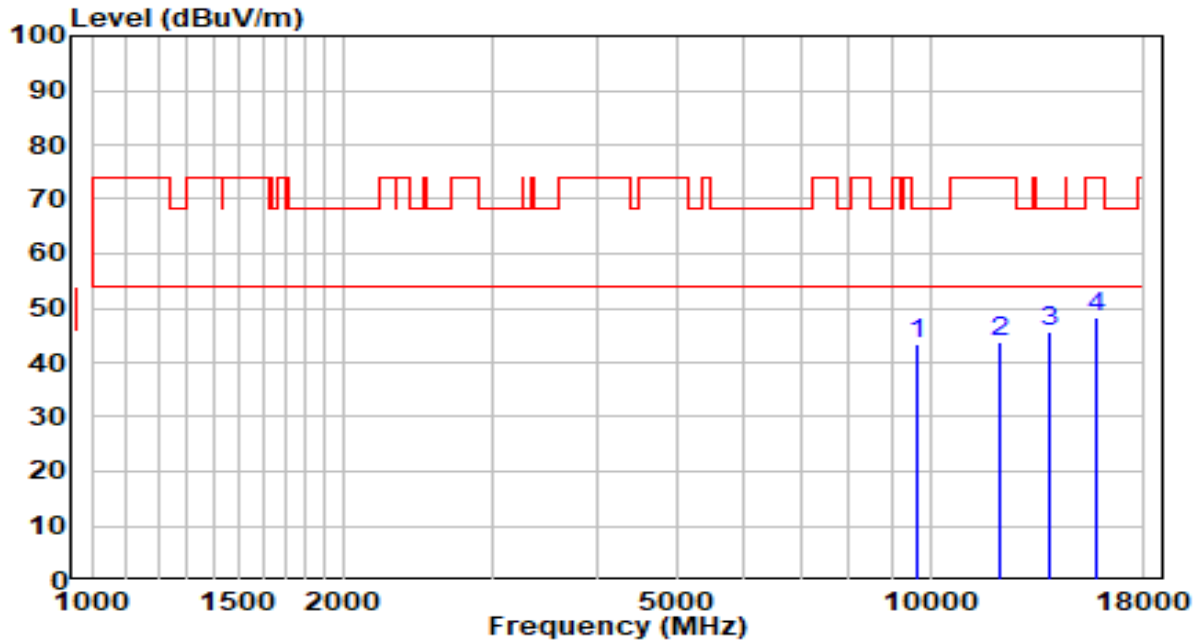


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9661.500	27.41	15.99	43.40	-24.80	68.20	Peak
2	12067.000	25.01	18.85	43.86	-30.14	74.00	Peak
3	* 13903.000	23.28	22.31	45.59	-22.61	68.20	Peak
4	15739.000	27.54	20.76	48.30	-25.70	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5320MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

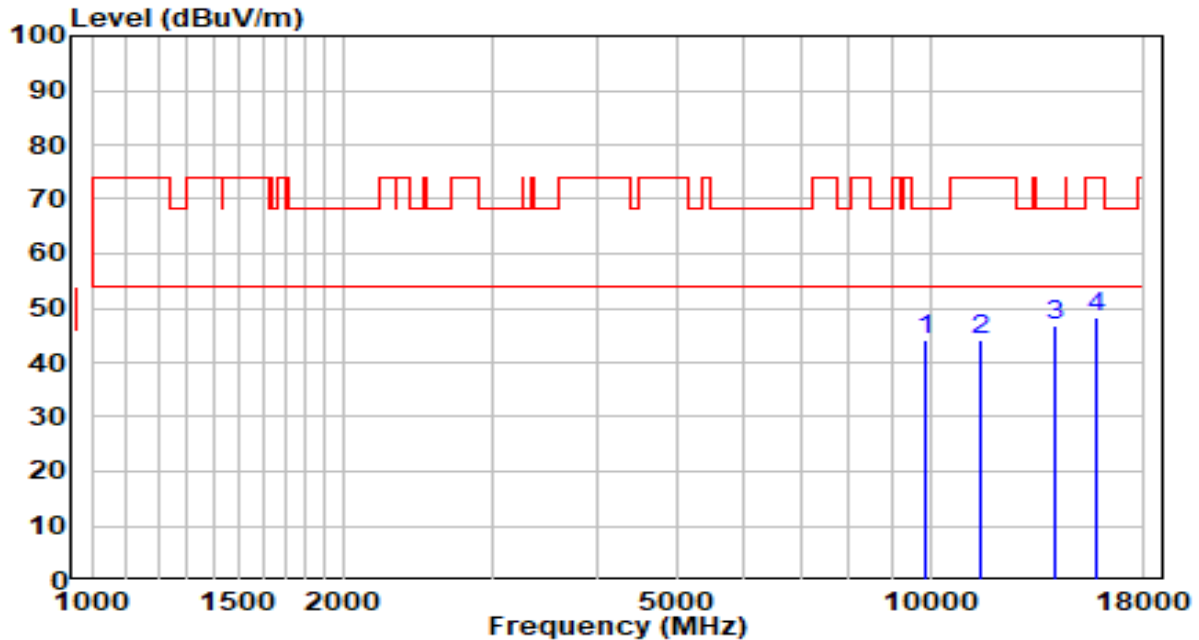


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9874.000	27.63	16.35	43.98	-24.22	68.20	Peak
2	11455.000	24.03	19.98	44.01	-29.99	74.00	Peak
3	* 14124.000	24.40	22.43	46.83	-21.37	68.20	Peak
4	15764.500	27.75	20.69	48.44	-25.56	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5320MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

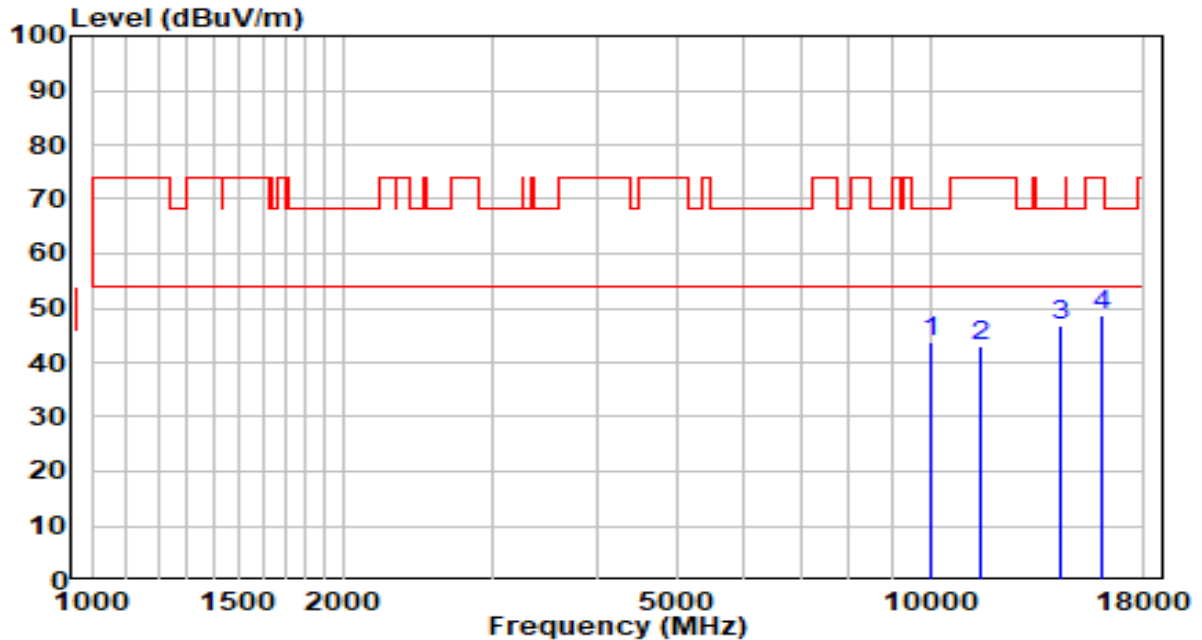


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10001.500	27.29	16.57	43.86	-24.34	68.20	Peak
2	11472.000	23.13	20.01	43.14	-30.86	74.00	Peak
3	* 14294.000	24.44	22.44	46.88	-21.32	68.20	Peak
4	16079.000	28.55	20.29	48.84	-25.16	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5500MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

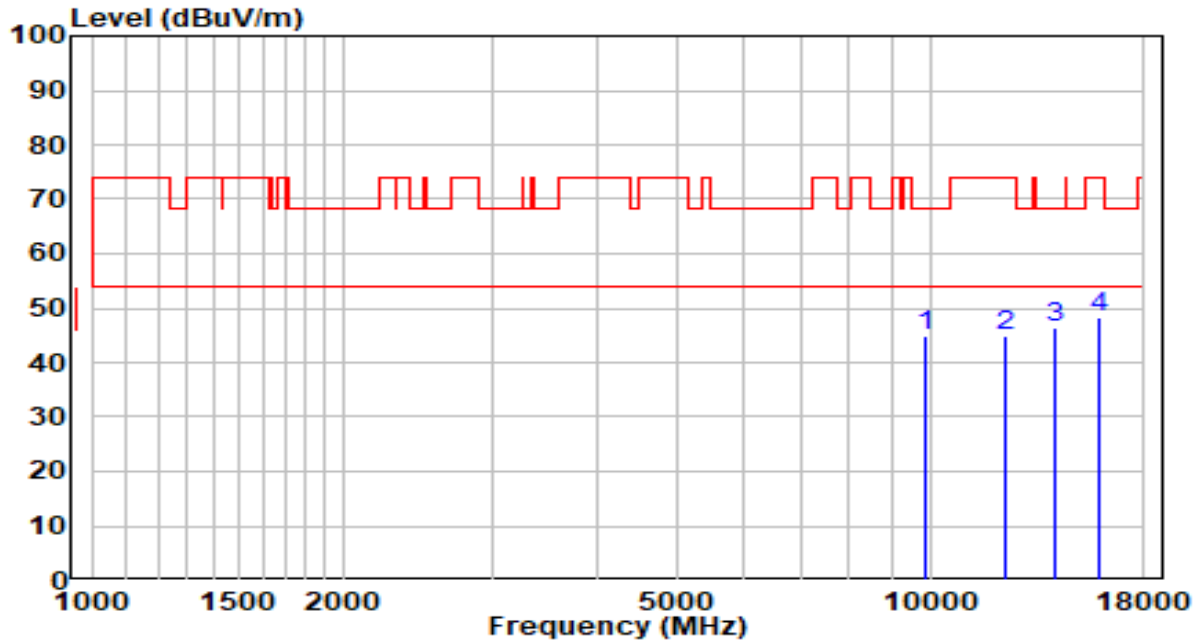


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9899.500	28.34	16.39	44.73	-23.47	68.20	Peak
2	12288.000	26.37	18.62	44.99	-29.01	74.00	Peak
3	* 14115.500	23.81	22.43	46.24	-21.96	68.20	Peak
4	15849.500	27.74	20.48	48.22	-25.78	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5500MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

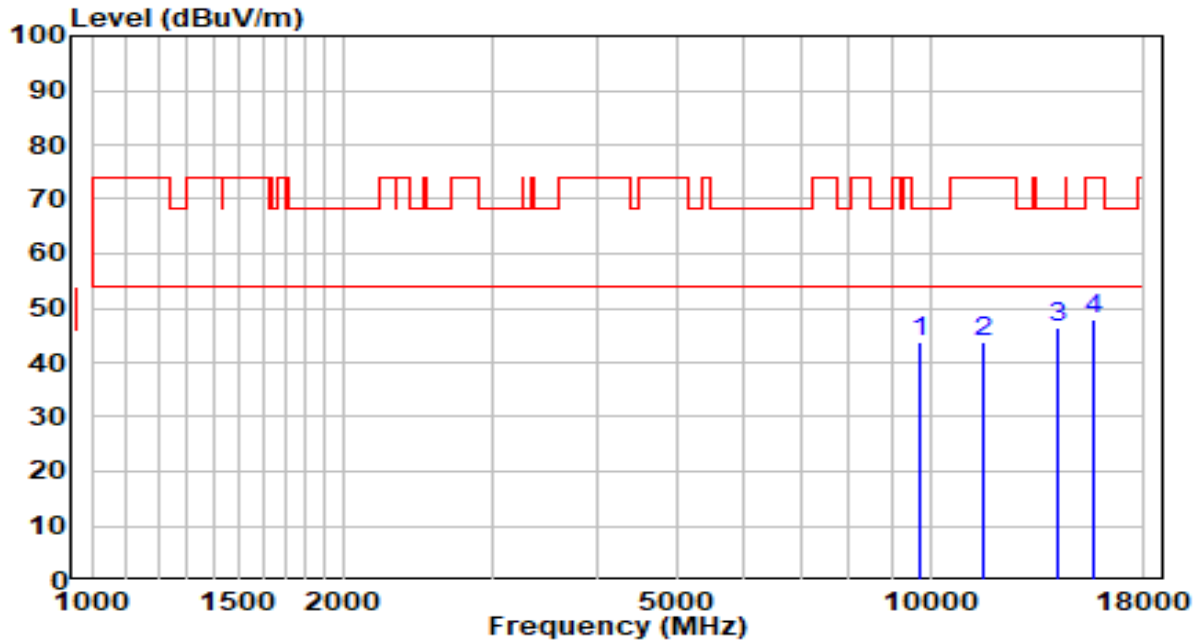


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9695.500	27.73	16.05	43.78	-24.42	68.20	Peak
2	11608.000	24.02	19.81	43.83	-30.17	74.00	Peak
3	* 14200.500	24.12	22.43	46.55	-21.65	68.20	Peak
4	15713.500	27.06	20.82	47.88	-26.12	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5580MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

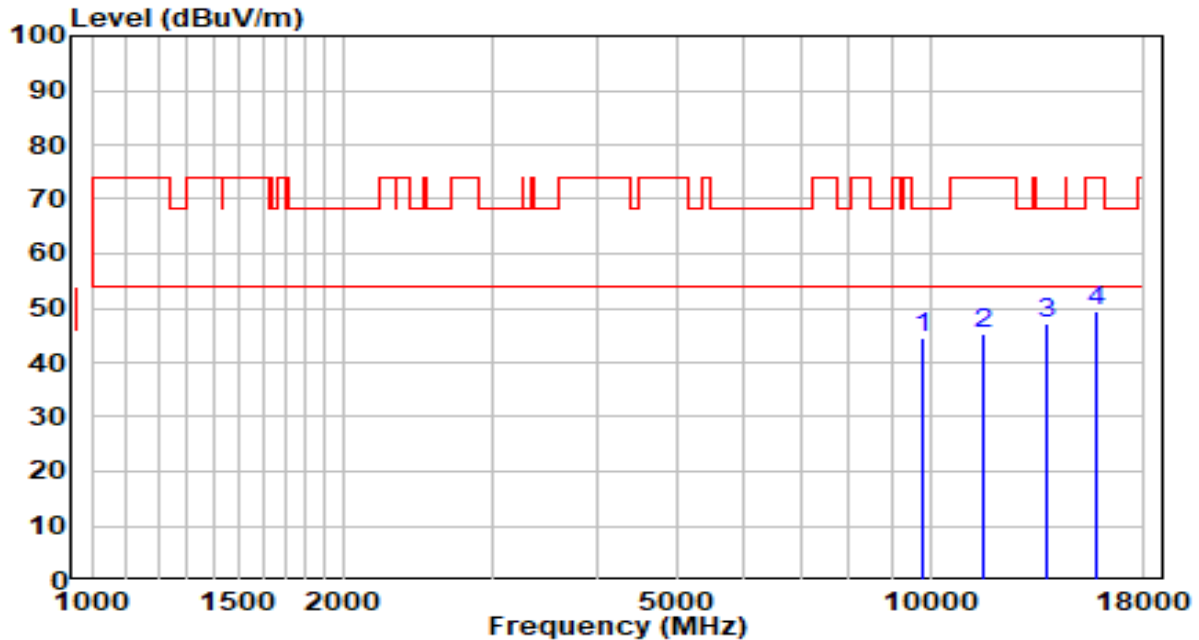


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9831.500	28.30	16.28	44.58	-23.62	68.20	Peak
2	11582.500	25.25	19.86	45.11	-28.89	74.00	Peak
3	* 13758.500	25.00	22.15	47.15	-21.05	68.20	Peak
4	15764.500	28.80	20.69	49.49	-24.51	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5580MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

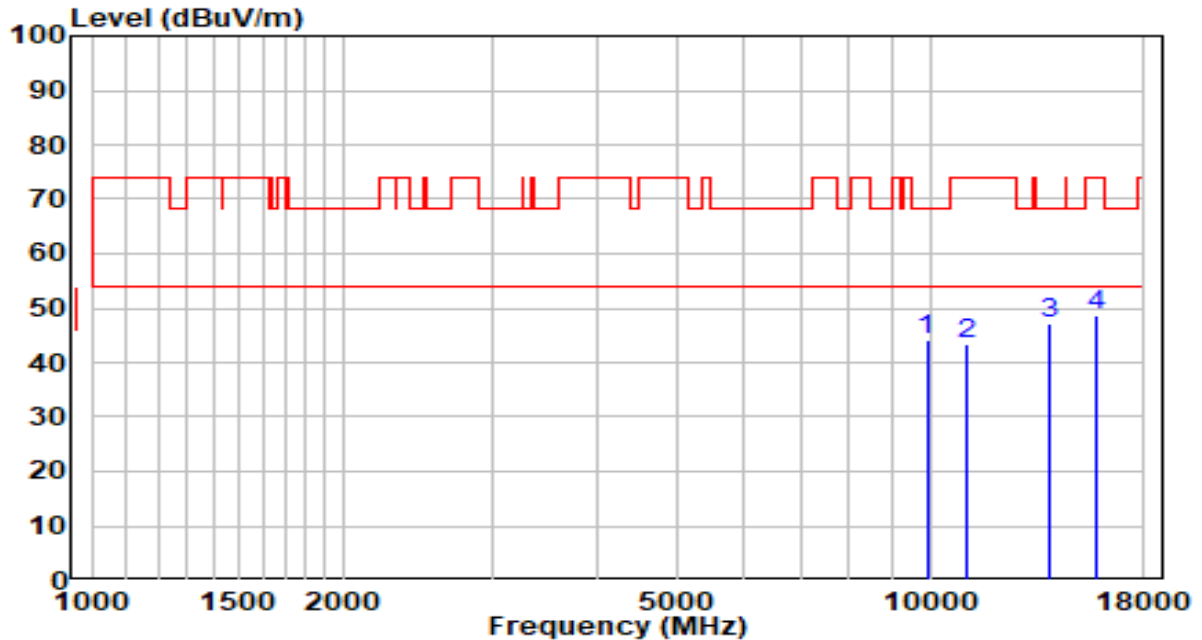


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9908.000	27.67	16.41	44.08	-24.12	68.20	Peak
2	11098.000	23.99	19.43	43.42	-30.58	74.00	Peak
3	* 13911.500	24.75	22.32	47.07	-21.13	68.20	Peak
4	15773.000	28.04	20.67	48.71	-25.29	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).



EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5700MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

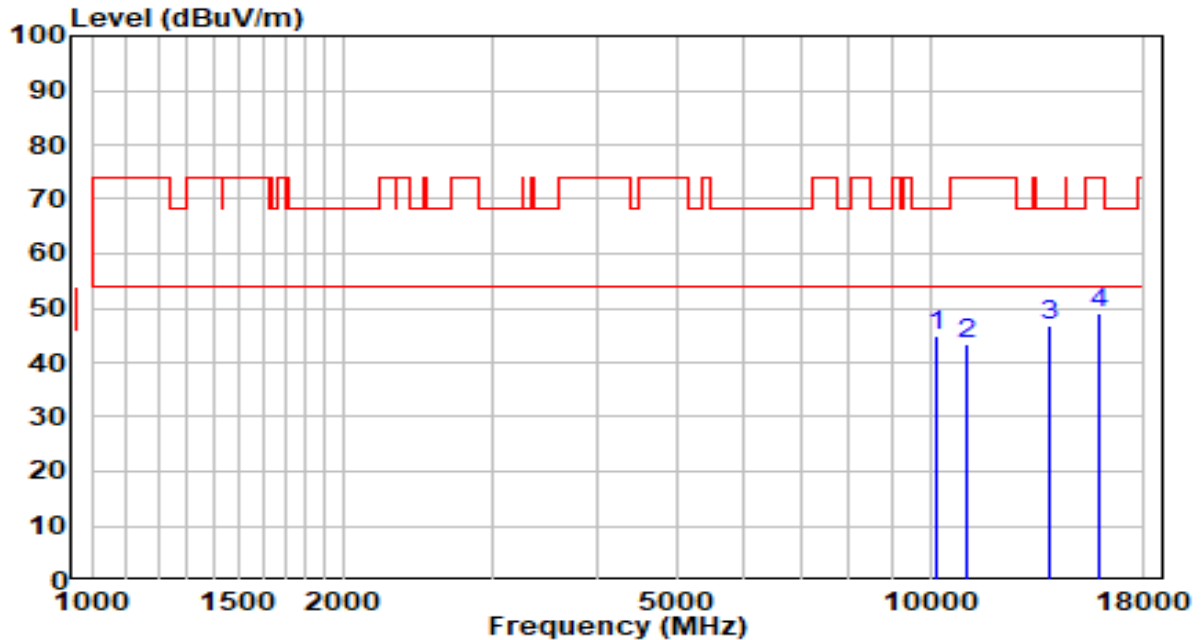


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10180.000	27.46	17.28	44.74	-23.46	68.20	Peak
2	11089.500	24.14	19.42	43.56	-30.44	74.00	Peak
3	* 13920.000	24.42	22.33	46.75	-21.45	68.20	Peak
4	15866.500	28.62	20.44	49.06	-24.94	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5700MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

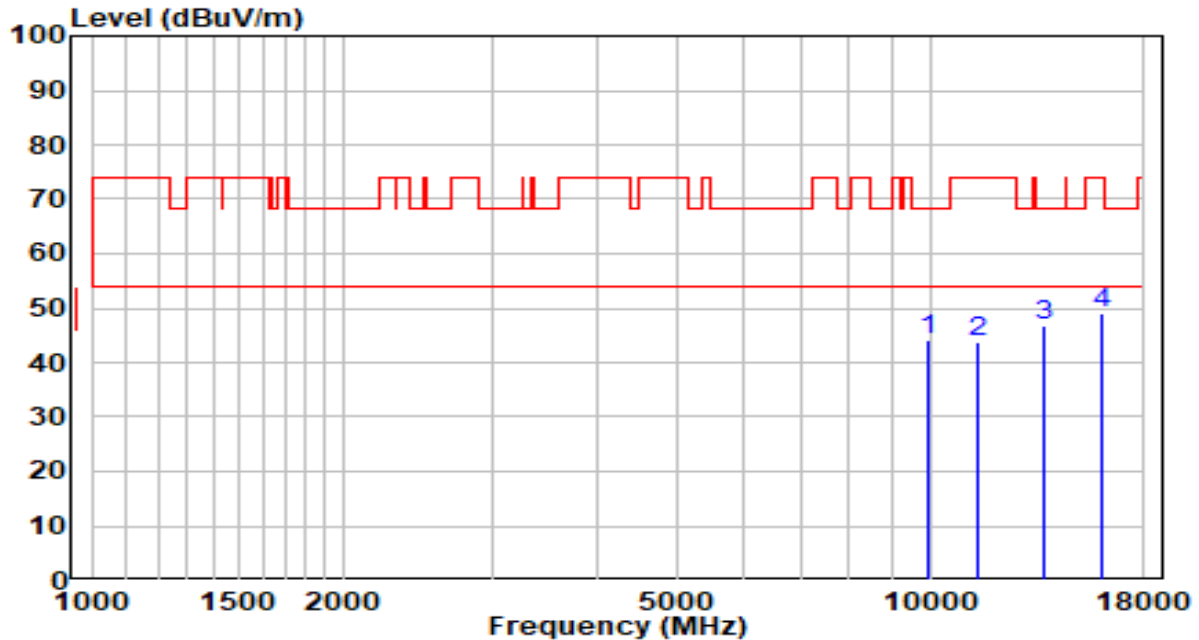


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9959.000	27.53	16.49	44.02	-24.18	68.20	Peak
2	11412.500	23.88	19.92	43.80	-30.20	74.00	Peak
3	* 13622.500	24.82	21.99	46.81	-21.39	68.20	Peak
4	16079.000	28.69	20.29	48.98	-25.02	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Tri-Band Wi-Fi 6E Router	Date of Test	2021-10-21
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit at 5720MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

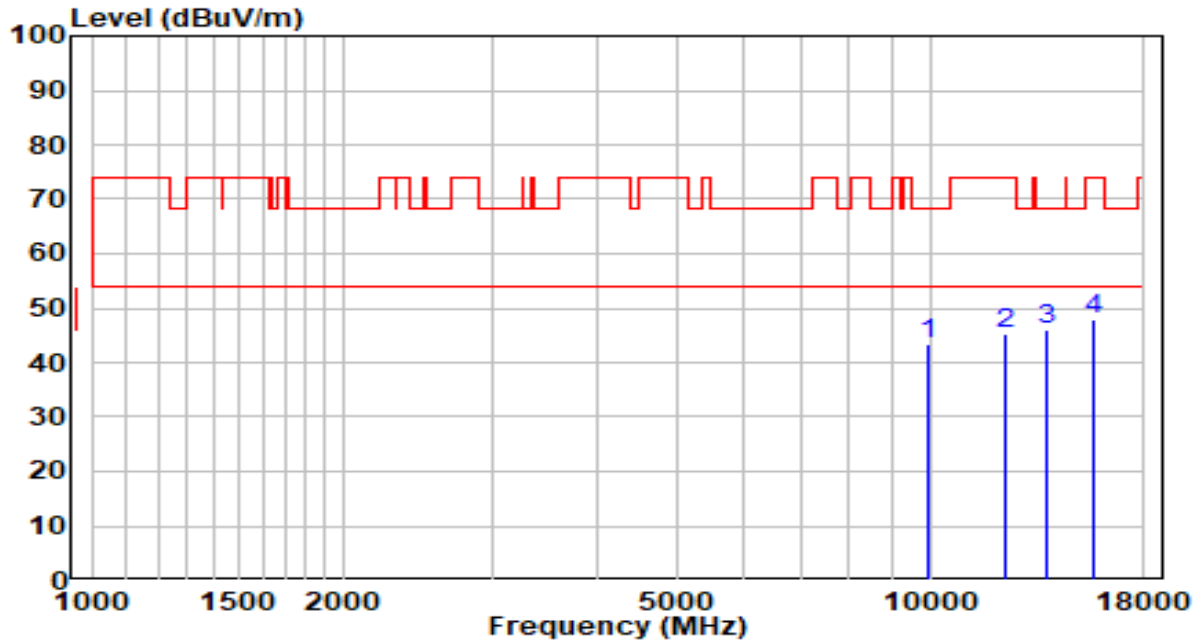

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9976.000	26.95	16.52	43.47	-24.73	68.20	Peak
2	12305.000	26.73	18.61	45.34	-28.66	74.00	Peak
3	* 13767.000	23.78	22.16	45.94	-22.26	68.20	Peak
4	15679.500	26.95	20.90	47.85	-26.15	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).