Test Mode:	802.11be EHT80	Channel:	6865
Polarity:	Vertical	Test Voltage:	DC 12 V

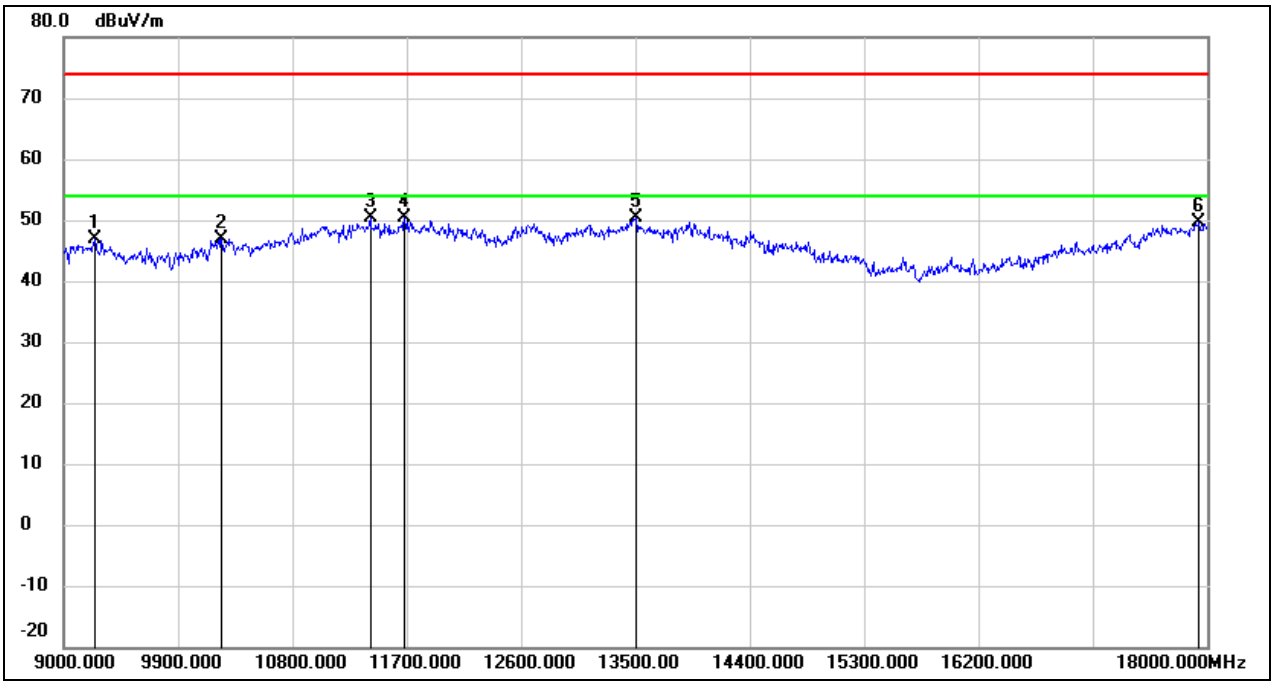

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9243.000	36.02	10.85	46.87	74.00	-27.13	peak
2	10242.000	34.40	12.58	46.98	74.00	-27.02	peak
3	11412.000	34.26	16.22	50.48	74.00	-23.52	peak
4	11682.000	33.43	17.04	50.47	74.00	-23.53	peak
5	13509.000	29.46	20.83	50.29	74.00	-23.71	peak
6	17937.000	24.90	24.76	49.66	74.00	-24.34	peak

Test Mode:	802.11be EHT80	Channel:	6945
Polarity:	Horizontal	Test Voltage:	DC 12 V

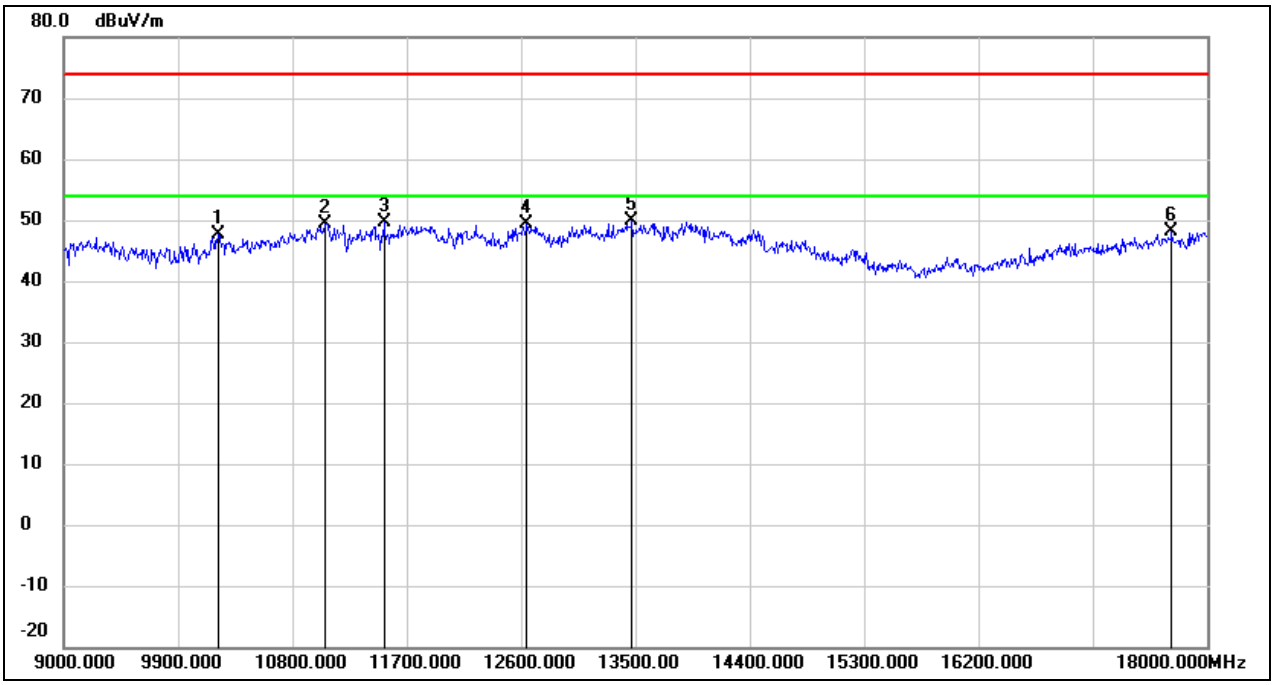

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10215.000	35.10	12.52	47.62	74.00	-26.38	peak
2	11052.000	34.54	14.94	49.48	74.00	-24.52	peak
3	11520.000	32.97	16.59	49.56	74.00	-24.44	peak
4	12645.000	31.49	17.92	49.41	74.00	-24.59	peak
5	13473.000	29.14	20.70	49.84	74.00	-24.16	peak
6	17721.000	24.75	23.38	48.13	74.00	-25.87	peak

Test Mode:	802.11be EHT80	Channel:	6945
Polarity:	Vertical	Test Voltage:	DC 12 V

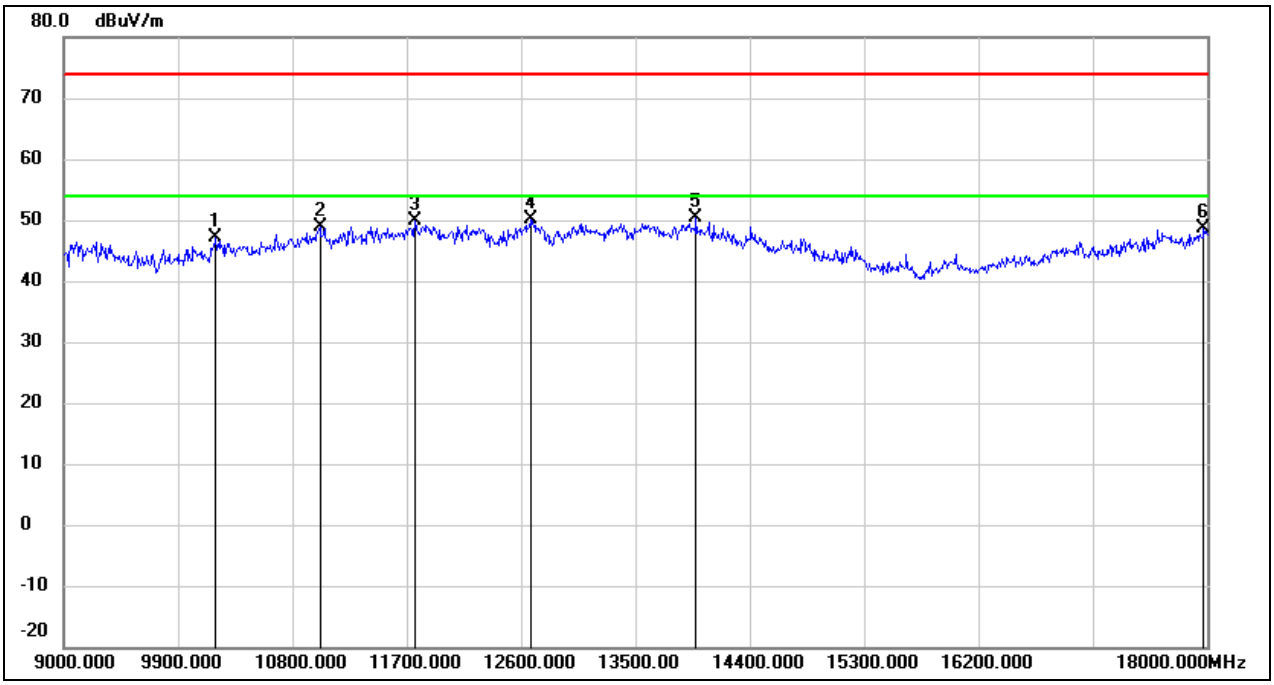

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10197.000	34.72	12.49	47.21	74.00	-26.79	peak
2	11016.000	33.98	14.81	48.79	74.00	-25.21	peak
3	11763.000	32.69	17.26	49.95	74.00	-24.05	peak
4	12672.000	32.02	18.00	50.02	74.00	-23.98	peak
5	13977.000	28.59	21.83	50.42	74.00	-23.58	peak
6	17973.000	23.61	24.99	48.60	74.00	-25.40	peak

Test Mode:	802.11be EHT80	Channel:	7025
Polarity:	Horizontal	Test Voltage:	DC 12 V

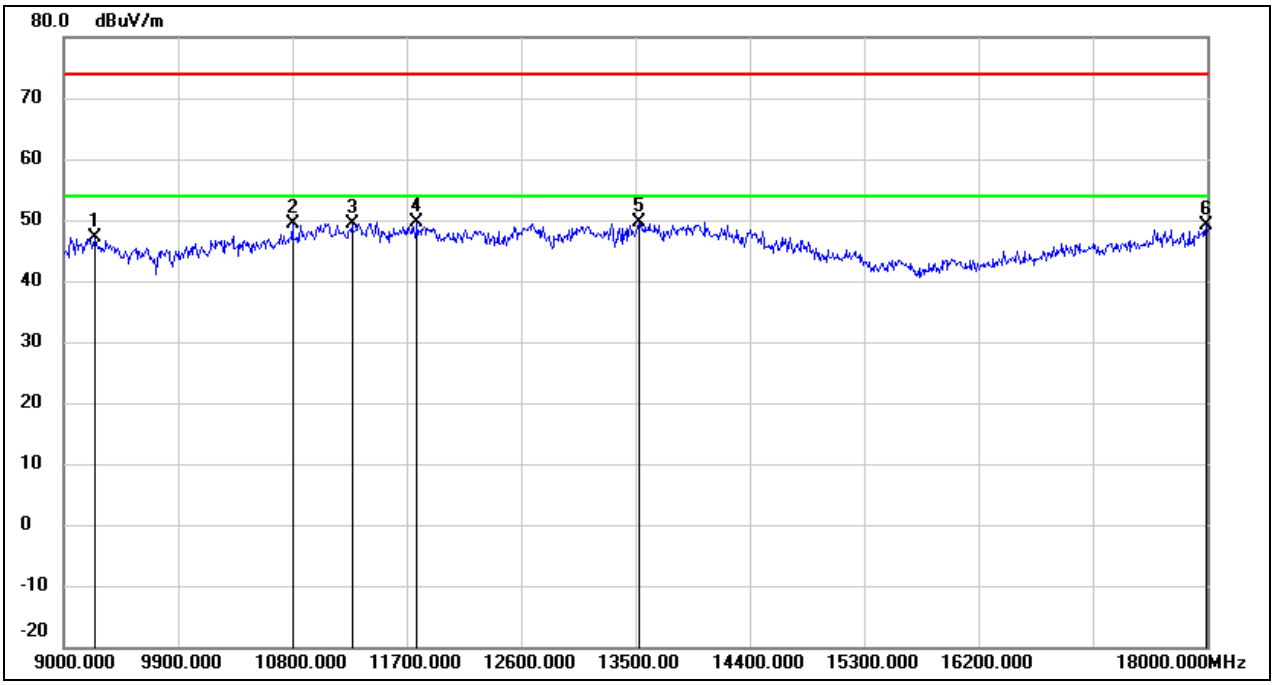

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9243.000	36.19	10.85	47.04	74.00	-26.96	peak
2	10800.000	35.21	14.10	49.31	74.00	-24.69	peak
3	11268.000	33.66	15.71	49.37	74.00	-24.63	peak
4	11781.000	32.22	17.30	49.52	74.00	-24.48	peak
5	13527.000	28.83	20.87	49.70	74.00	-24.30	peak
6	17991.000	23.99	25.11	49.10	74.00	-24.90	peak

Test Mode:	802.11be EHT80	Channel:	7025
Polarity:	Vertical	Test Voltage:	DC 12 V

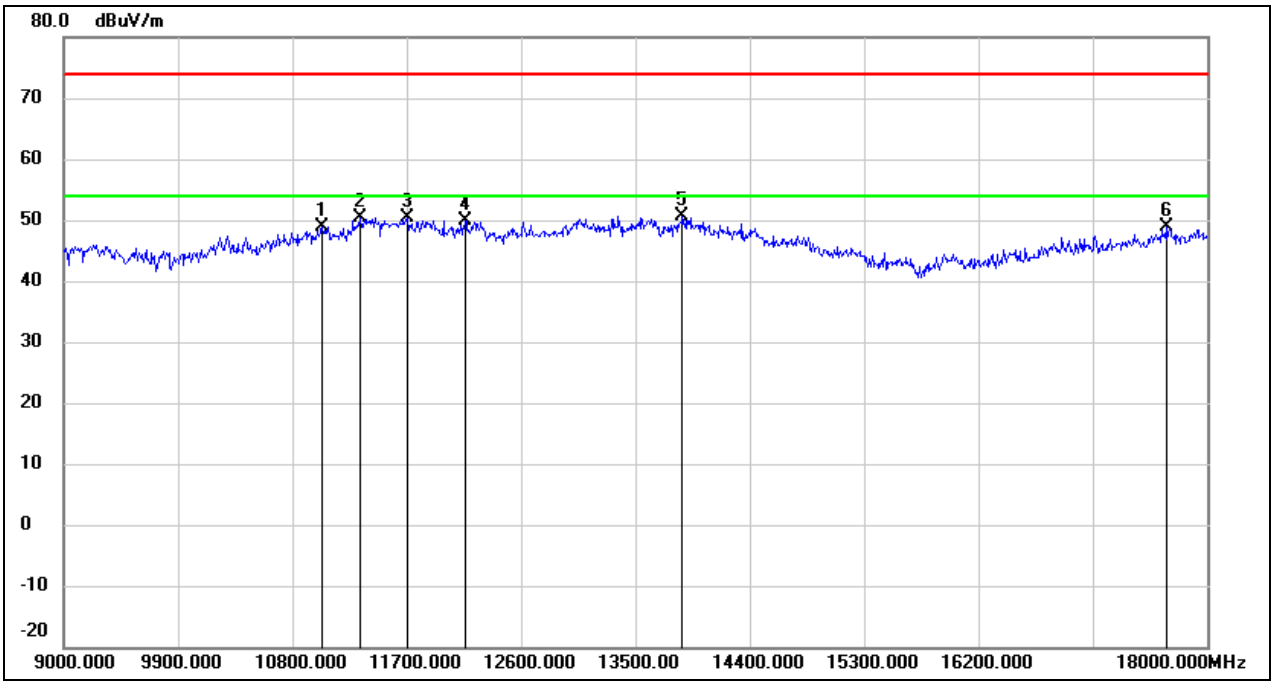

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11034.000	34.02	14.87	48.89	74.00	-25.11	peak
2	11331.000	34.34	15.93	50.27	74.00	-23.73	peak
3	11700.000	33.31	17.08	50.39	74.00	-23.61	peak
4	12159.000	32.01	17.78	49.79	74.00	-24.21	peak
5	13869.000	28.94	21.59	50.53	74.00	-23.47	peak
6	17676.000	25.83	23.09	48.92	74.00	-25.08	peak

Test Mode:	802.11be EHT160	Channel:	6025
Polarity:	Horizontal	Test Voltage:	DC 12 V

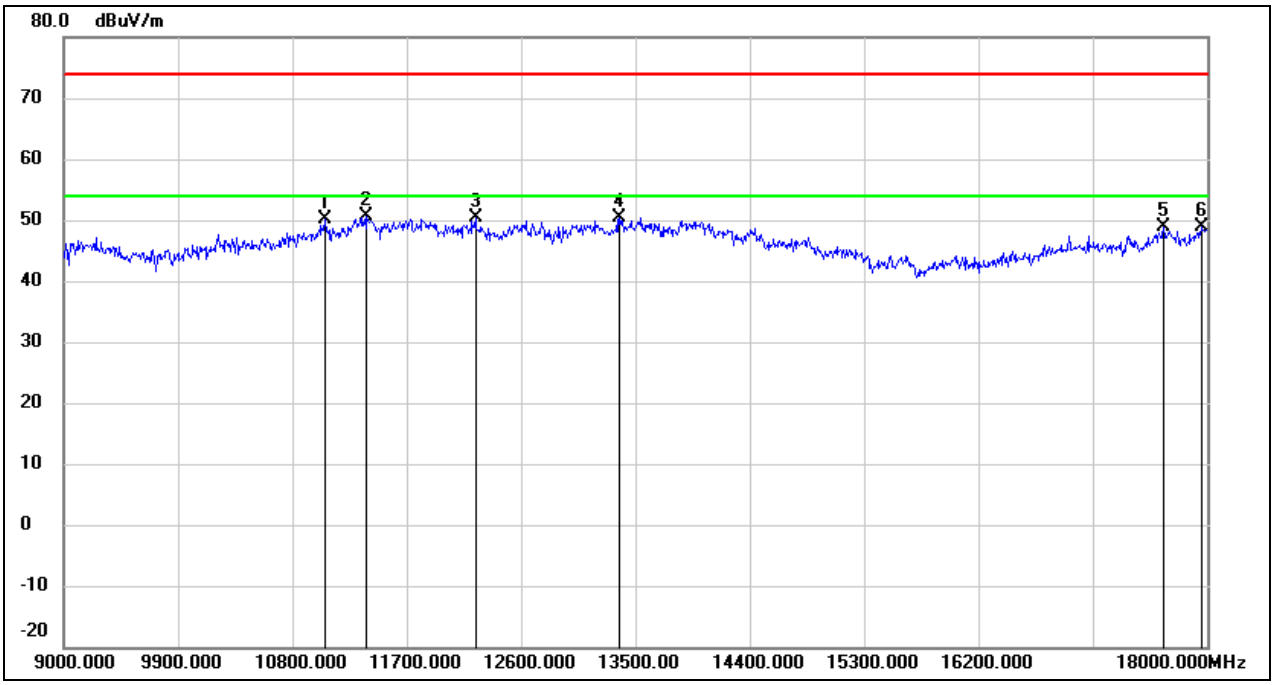

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11052.000	35.28	14.94	50.22	74.00	-23.78	peak
2	11385.000	34.43	16.12	50.55	74.00	-23.45	peak
3	12240.000	32.64	17.73	50.37	74.00	-23.63	peak
4	13374.000	30.10	20.33	50.43	74.00	-23.57	peak
5	17658.000	25.94	22.97	48.91	74.00	-25.09	peak
6	17955.000	24.06	24.87	48.93	74.00	-25.07	peak

Test Mode:	802.11be EHT160	Channel:	6025
Polarity:	Vertical	Test Voltage:	DC 12 V

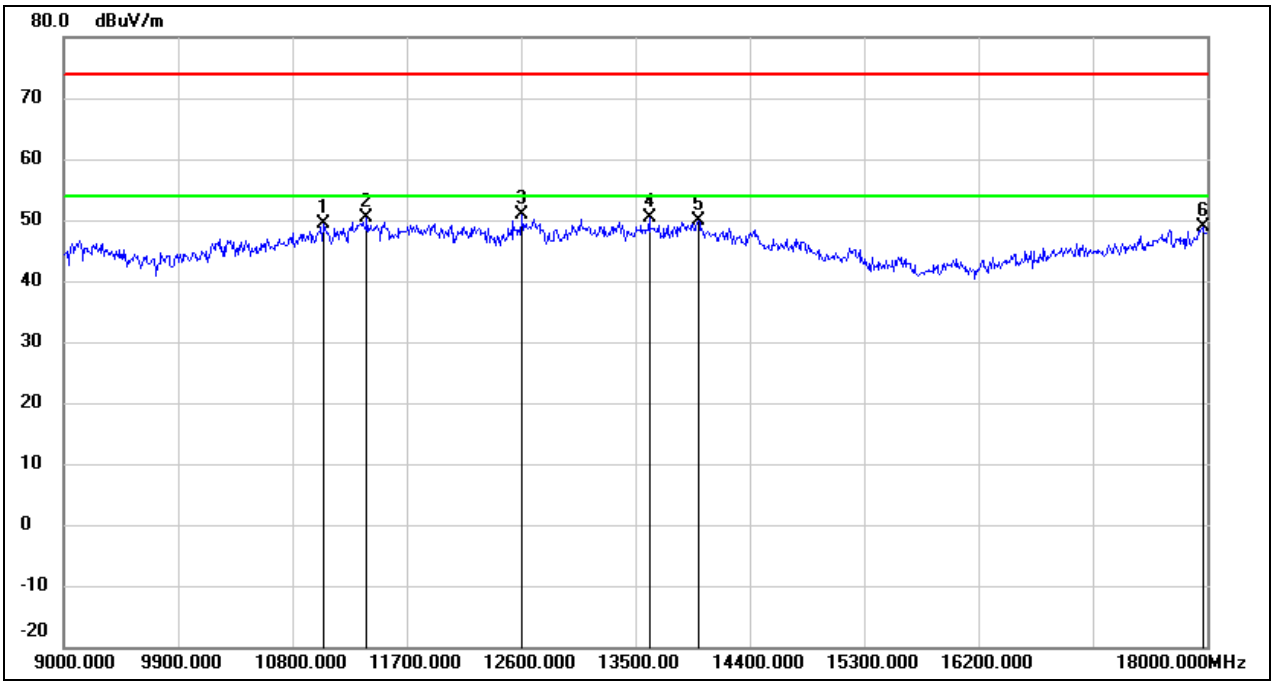

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11043.000	34.43	14.90	49.33	74.00	-24.67	peak
2	11385.000	34.36	16.12	50.48	74.00	-23.52	peak
3	12609.000	32.94	17.83	50.77	74.00	-23.23	peak
4	13608.000	29.42	21.05	50.47	74.00	-23.53	peak
5	13995.000	28.01	21.87	49.88	74.00	-24.12	peak
6	17964.000	23.85	24.92	48.77	74.00	-25.23	peak

Test Mode:	802.11be EHT160	Channel:	6185
Polarity:	Horizontal	Test Voltage:	DC 12 V

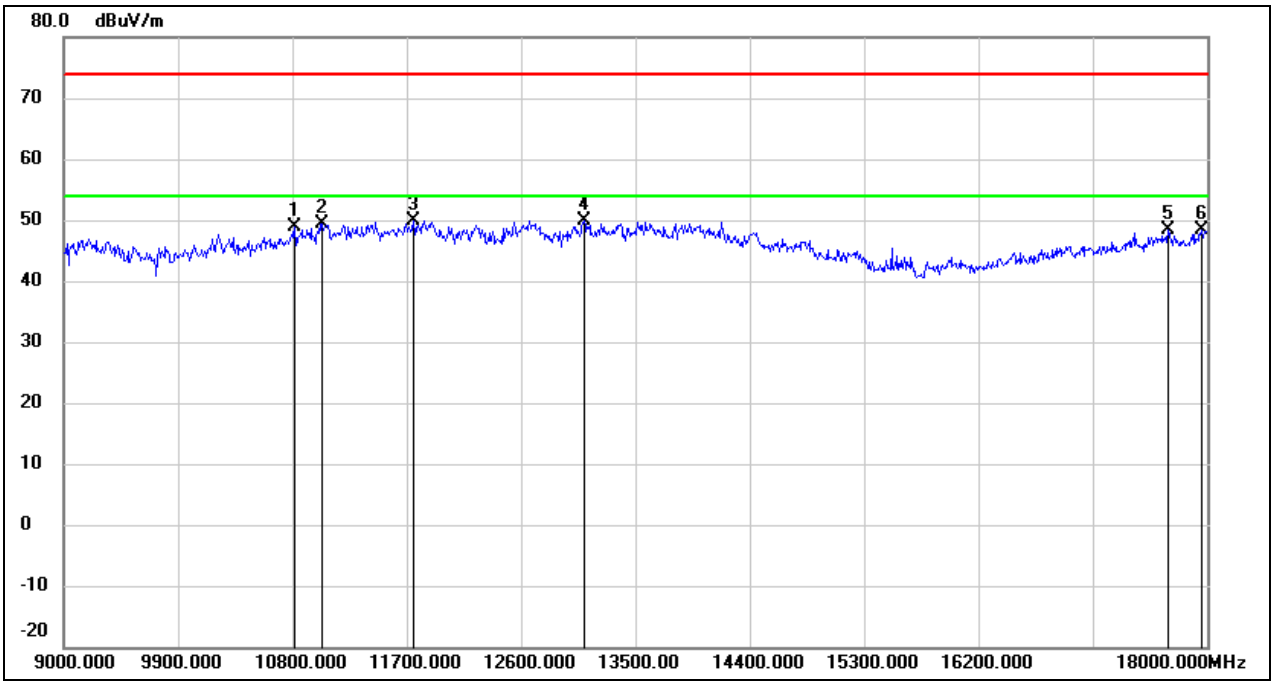

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10818.000	34.70	14.17	48.87	74.00	-25.13	peak
2	11034.000	34.54	14.87	49.41	74.00	-24.59	peak
3	11754.000	32.75	17.23	49.98	74.00	-24.02	peak
4	13095.000	30.63	19.26	49.89	74.00	-24.11	peak
5	17694.000	25.18	23.20	48.38	74.00	-25.62	peak
6	17955.000	23.62	24.87	48.49	74.00	-25.51	peak

Test Mode:	802.11be EHT160	Channel:	6185
Polarity:	Vertical	Test Voltage:	DC 12 V

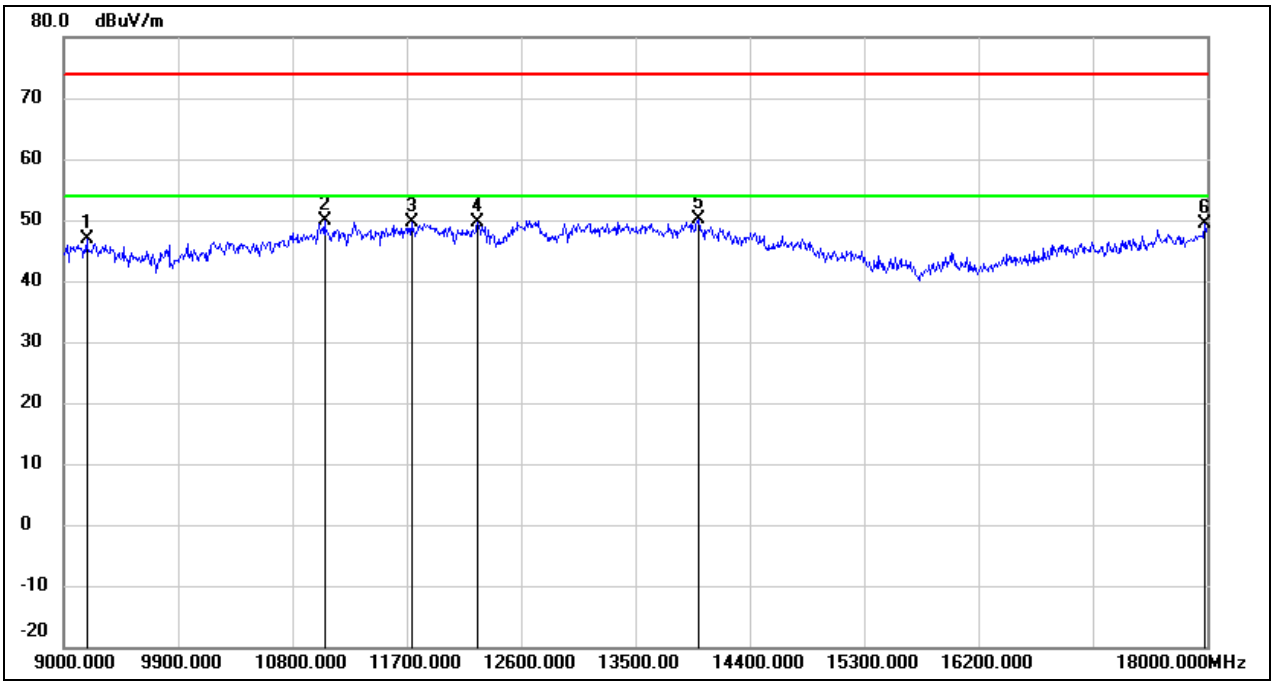

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9180.000	35.98	10.84	46.82	74.00	-27.18	peak
2	11052.000	34.95	14.94	49.89	74.00	-24.11	peak
3	11736.000	32.35	17.18	49.53	74.00	-24.47	peak
4	12258.000	31.82	17.72	49.54	74.00	-24.46	peak
5	13995.000	28.24	21.87	50.11	74.00	-23.89	peak
6	17982.000	24.22	25.04	49.26	74.00	-24.74	peak

Test Mode:	802.11be EHT160	Channel:	6345
Polarity:	Horizontal	Test Voltage:	DC 12 V

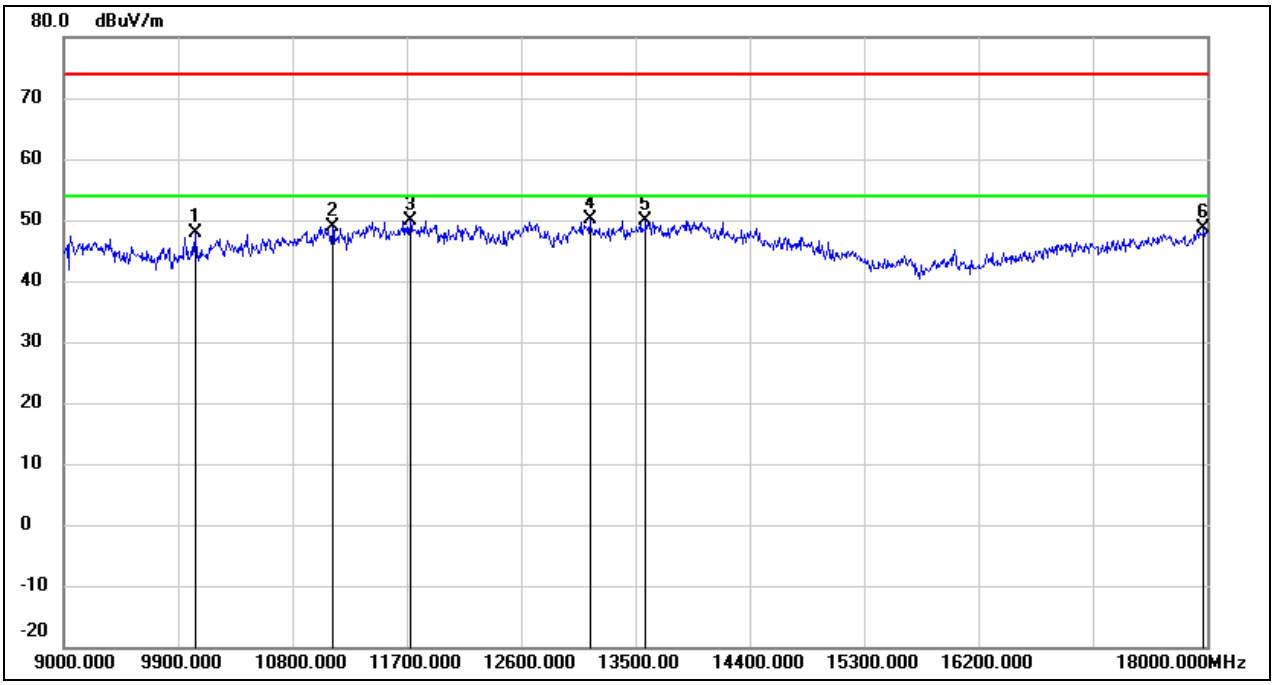

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10035.000	35.85	12.15	48.00	74.00	-26.00	peak
2	11115.000	33.76	15.16	48.92	74.00	-25.08	peak
3	11727.000	32.72	17.16	49.88	74.00	-24.12	peak
4	13140.000	30.65	19.43	50.08	74.00	-23.92	peak
5	13581.000	28.86	20.99	49.85	74.00	-24.15	peak
6	17973.000	23.64	24.99	48.63	74.00	-25.37	peak

Test Mode:	802.11be EHT160	Channel:	6345
Polarity:	Vertical	Test Voltage:	DC 12 V

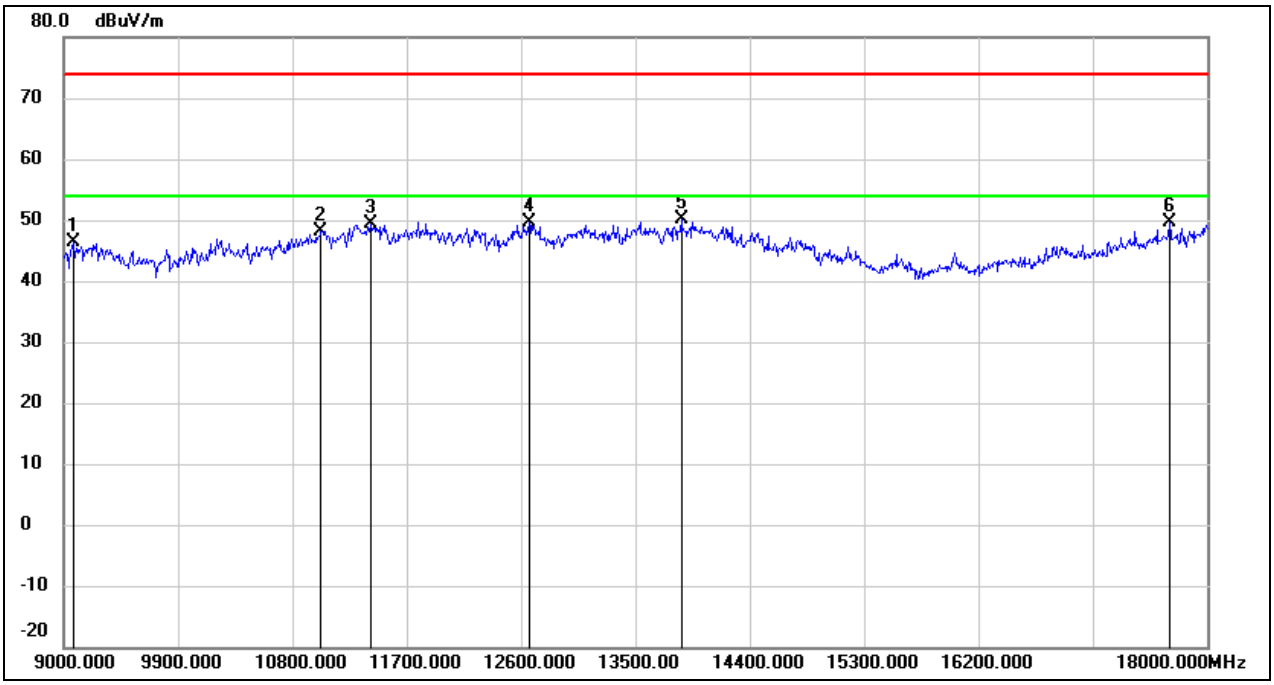

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9081.000	35.59	10.82	46.41	74.00	-27.59	peak
2	11025.000	33.36	14.83	48.19	74.00	-25.81	peak
3	11421.000	33.12	16.25	49.37	74.00	-24.63	peak
4	12663.000	31.72	17.98	49.70	74.00	-24.30	peak
5	13860.000	28.64	21.59	50.23	74.00	-23.77	peak
6	17703.000	26.27	23.26	49.53	74.00	-24.47	peak

Test Mode:	802.11be EHT160	Channel:	6505
Polarity:	Horizontal	Test Voltage:	DC 12 V

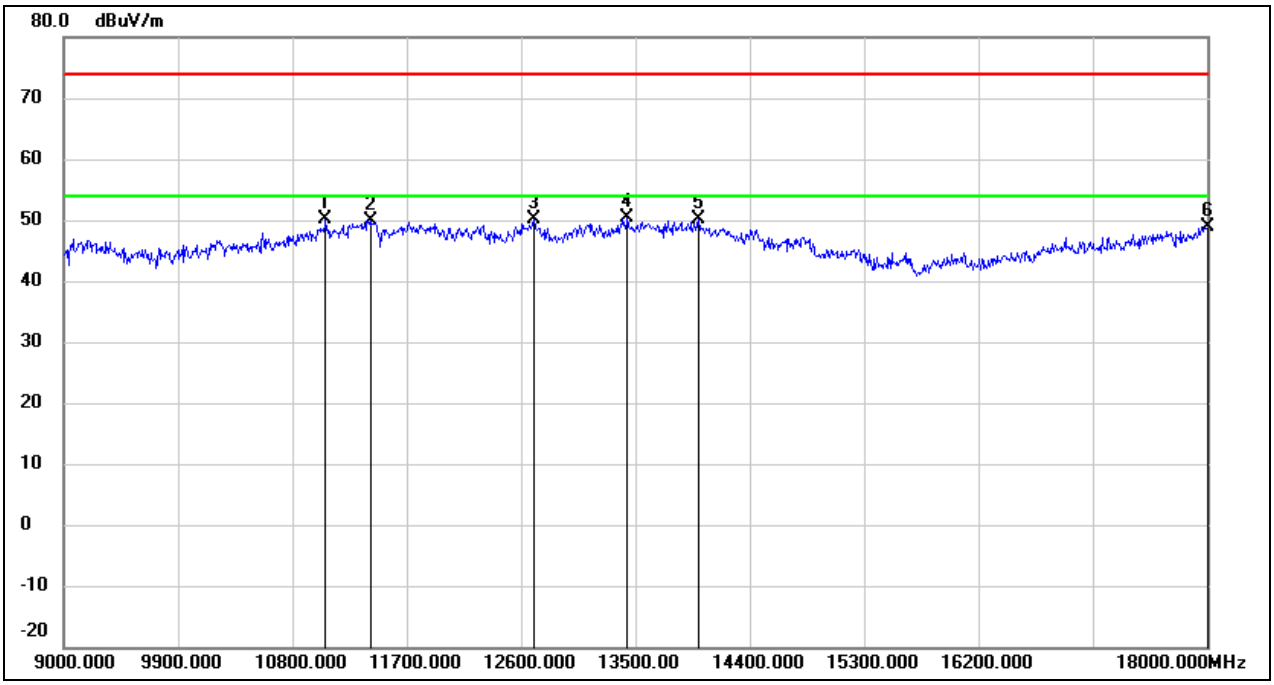

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11061.000	35.19	14.96	50.15	74.00	-23.85	peak
2	11412.000	33.67	16.22	49.89	74.00	-24.11	peak
3	12699.000	32.18	18.07	50.25	74.00	-23.75	peak
4	13437.000	29.85	20.57	50.42	74.00	-23.58	peak
5	13995.000	28.17	21.87	50.04	74.00	-23.96	peak
6	18000.000	23.81	25.16	48.97	74.00	-25.03	peak

Test Mode:	802.11be EHT160	Channel:	6505
Polarity:	Vertical	Test Voltage:	DC 12 V

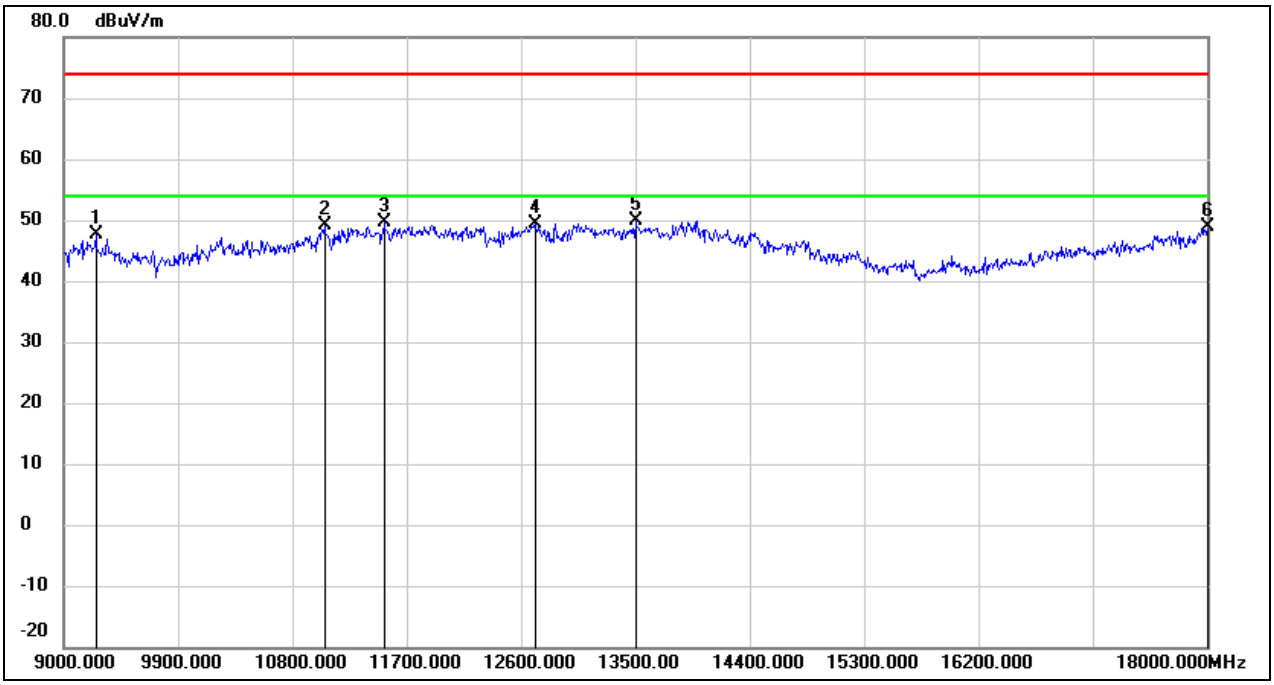

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9252.000	36.85	10.85	47.70	74.00	-26.30	peak
2	11052.000	34.10	14.94	49.04	74.00	-24.96	peak
3	11520.000	33.08	16.59	49.67	74.00	-24.33	peak
4	12708.000	31.36	18.10	49.46	74.00	-24.54	peak
5	13500.000	29.03	20.81	49.84	74.00	-24.16	peak
6	18000.000	23.74	25.16	48.90	74.00	-25.10	peak

Test Mode:	802.11be EHT160	Channel:	6665
Polarity:	Horizontal	Test Voltage:	DC 12 V

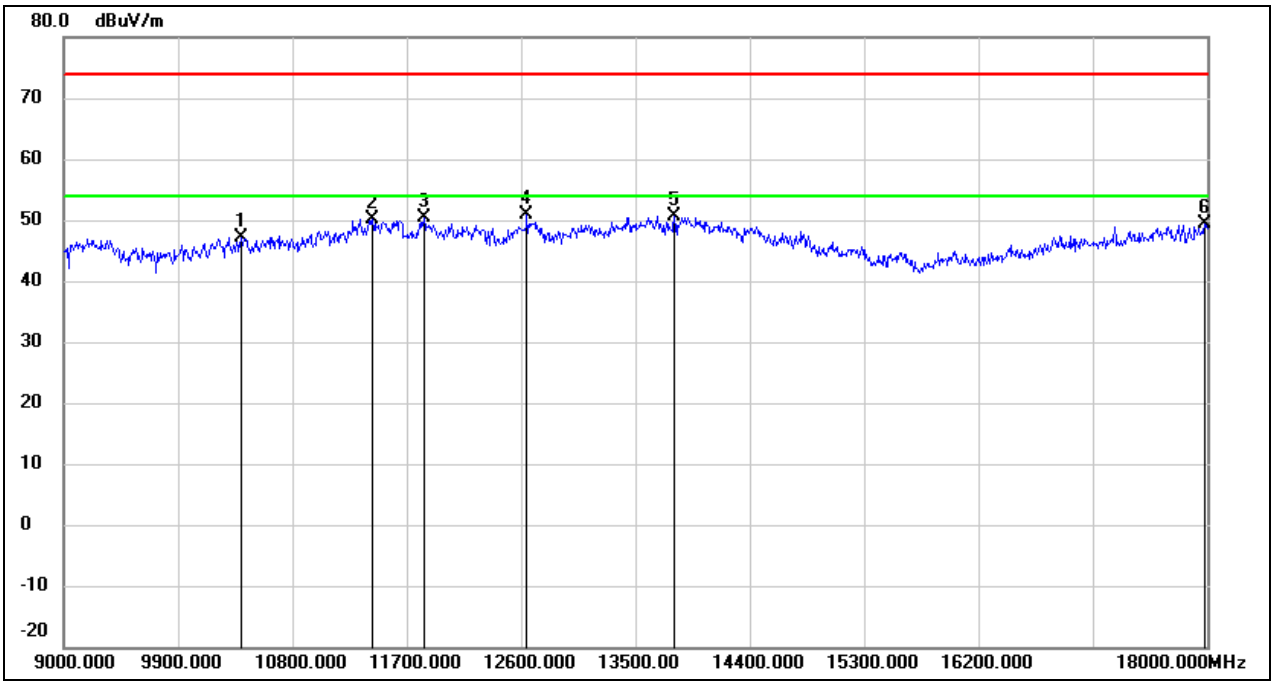

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10395.000	34.29	12.90	47.19	74.00	-26.81	peak
2	11430.000	33.90	16.28	50.18	74.00	-23.82	peak
3	11835.000	32.96	17.46	50.42	74.00	-23.58	peak
4	12645.000	32.84	17.92	50.76	74.00	-23.24	peak
5	13806.000	29.28	21.46	50.74	74.00	-23.26	peak
6	17982.000	24.34	25.04	49.38	74.00	-24.62	peak

Test Mode:	802.11be EHT160	Channel:	6665
Polarity:	Vertical	Test Voltage:	DC 12 V

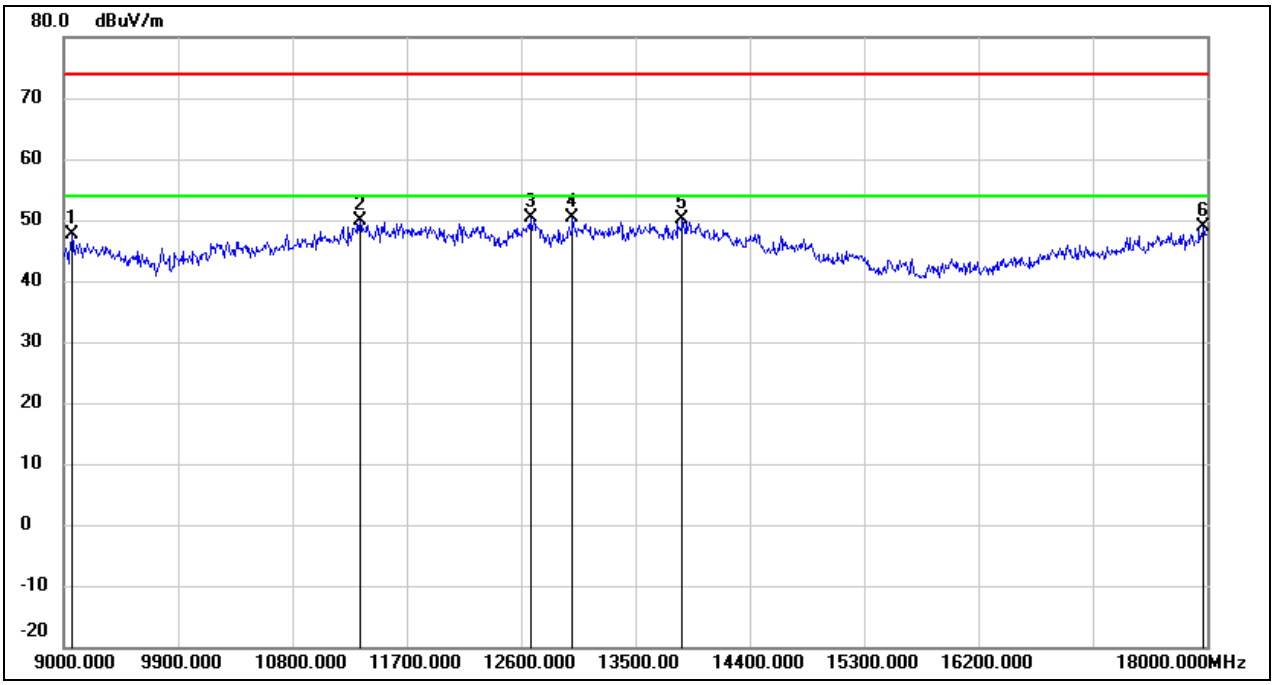

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9063.000	36.86	10.82	47.68	74.00	-26.32	peak
2	11331.000	33.85	15.93	49.78	74.00	-24.22	peak
3	12672.000	32.26	18.00	50.26	74.00	-23.74	peak
4	13005.000	31.38	18.91	50.29	74.00	-23.71	peak
5	13869.000	28.64	21.59	50.23	74.00	-23.77	peak
6	17973.000	23.87	24.99	48.86	74.00	-25.14	peak

Test Mode:	802.11be EHT160	Channel:	6825
Polarity:	Horizontal	Test Voltage:	DC 12 V

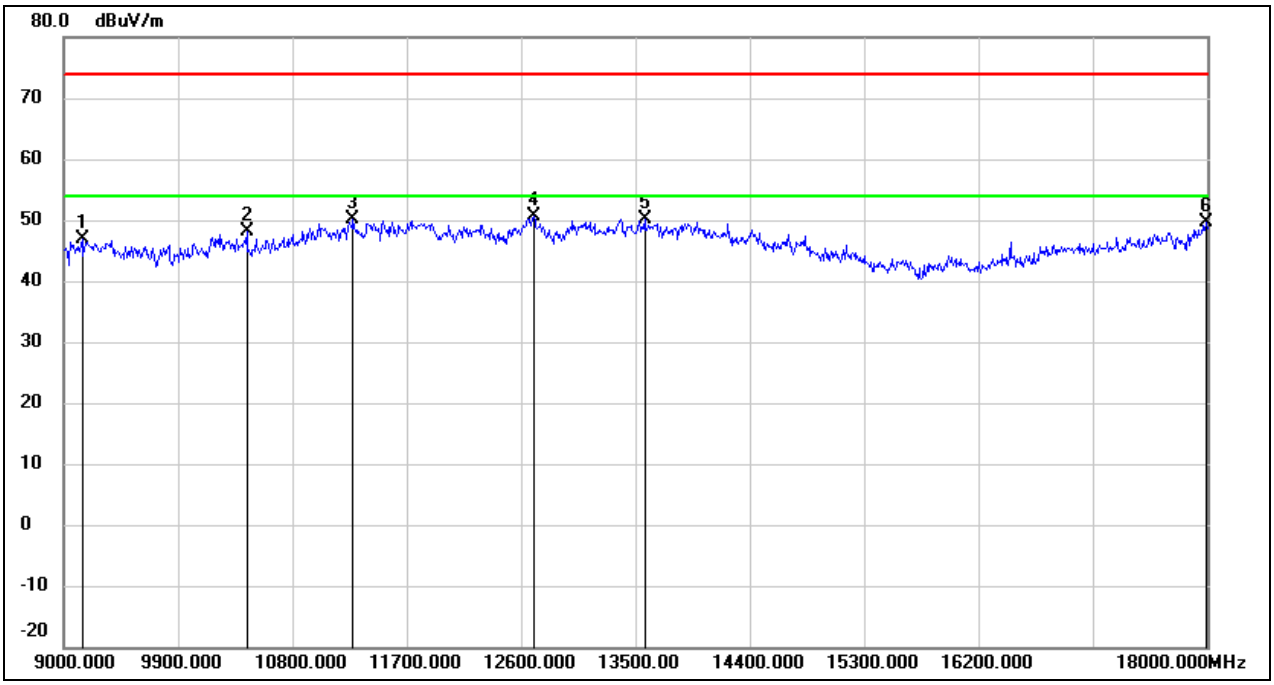

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9144.000	36.11	10.83	46.94	74.00	-27.06	peak
2	10440.000	35.19	13.00	48.19	74.00	-25.81	peak
3	11277.000	34.32	15.73	50.05	74.00	-23.95	peak
4	12699.000	32.49	18.07	50.56	74.00	-23.44	peak
5	13572.000	29.09	20.96	50.05	74.00	-23.95	peak
6	17991.000	24.64	25.11	49.75	74.00	-24.25	peak

Test Mode:	802.11be EHT160	Channel:	6825
Polarity:	Vertical	Test Voltage:	DC 12 V

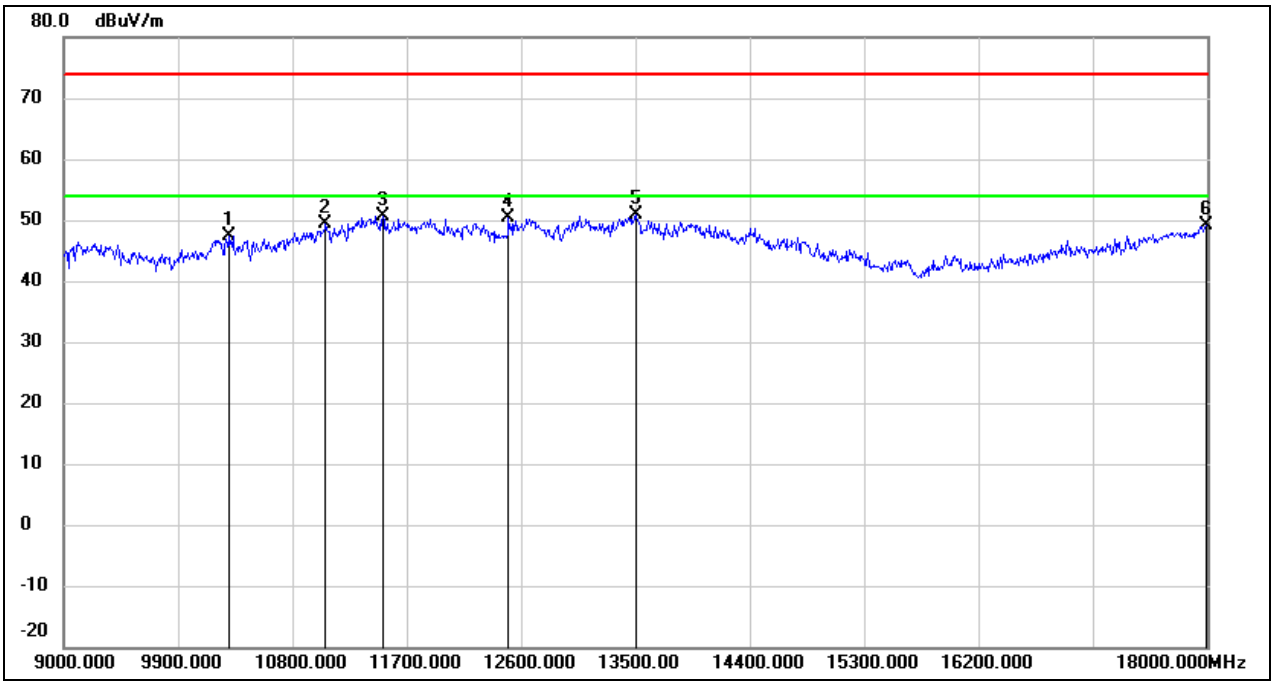

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	34.64	12.69	47.33	74.00	-26.67	peak
2	11061.000	34.47	14.96	49.43	74.00	-24.57	peak
3	11511.000	34.19	16.56	50.75	74.00	-23.25	peak
4	12501.000	32.84	17.53	50.37	74.00	-23.63	peak
5	13500.000	30.05	20.81	50.86	74.00	-23.14	peak
6	17991.000	24.09	25.11	49.20	74.00	-24.80	peak

Test Mode:	802.11be EHT160	Channel:	6985
Polarity:	Horizontal	Test Voltage:	DC 12 V

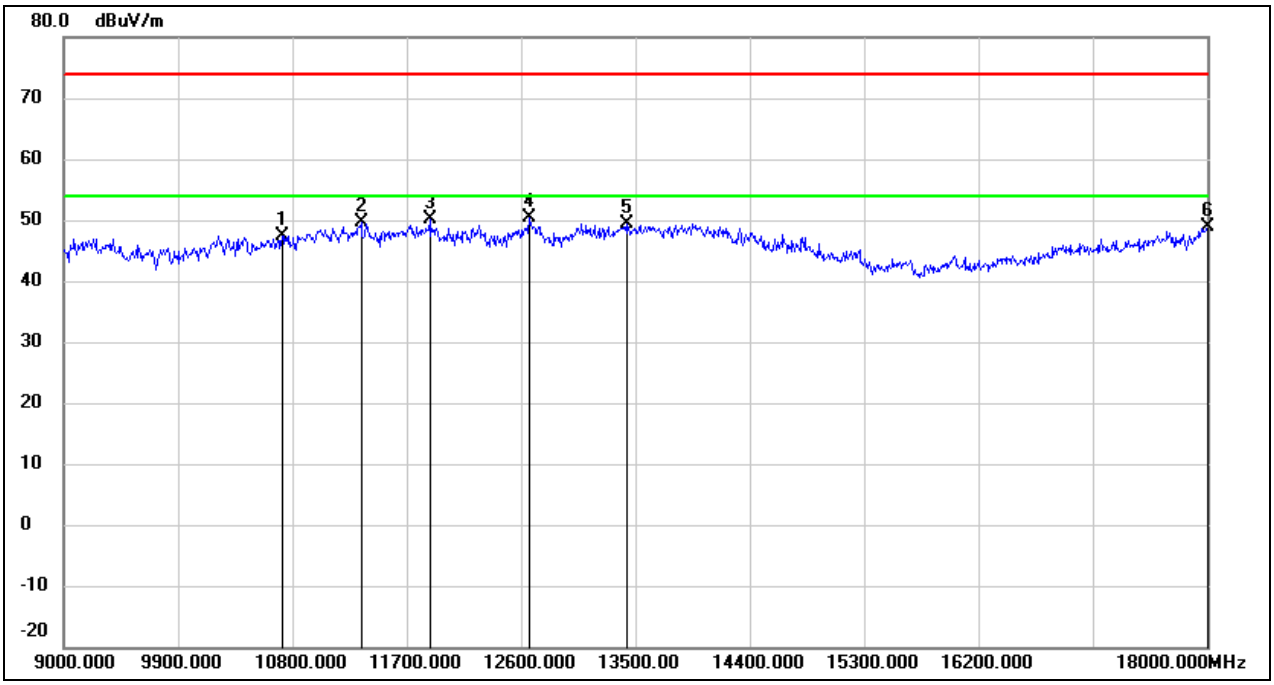

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10719.000	33.63	13.84	47.47	74.00	-26.53	peak
2	11340.000	33.59	15.96	49.55	74.00	-24.45	peak
3	11880.000	32.48	17.58	50.06	74.00	-23.94	peak
4	12663.000	32.37	17.98	50.35	74.00	-23.65	peak
5	13428.000	28.85	20.53	49.38	74.00	-24.62	peak
6	18000.000	23.60	25.16	48.76	74.00	-25.24	peak

Test Mode:	802.11be EHT160	Channel:	6985
Polarity:	Vertical	Test Voltage:	DC 12 V

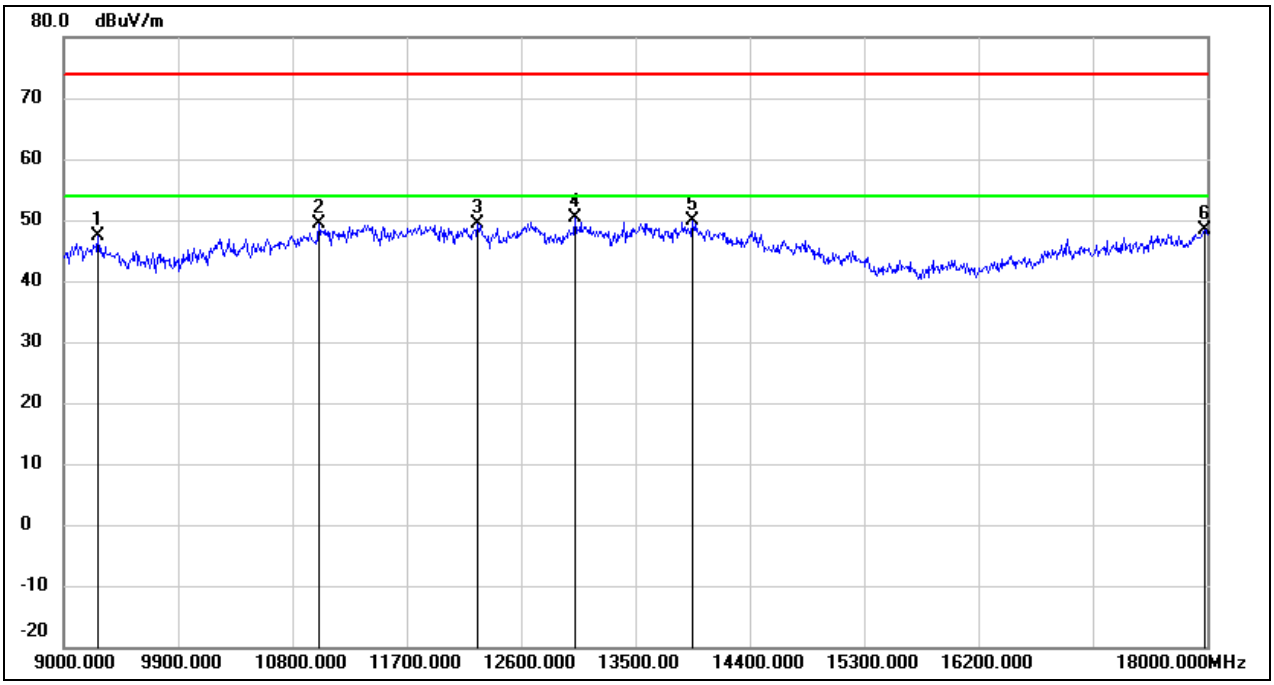

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9270.000	36.54	10.85	47.39	74.00	-26.61	peak
2	11007.000	34.52	14.77	49.29	74.00	-24.71	peak
3	12258.000	31.54	17.72	49.26	74.00	-24.74	peak
4	13023.000	31.50	18.98	50.48	74.00	-23.52	peak
5	13950.000	28.22	21.78	50.00	74.00	-24.00	peak
6	17982.000	23.39	25.04	48.43	74.00	-25.57	peak

Test Mode:	802.11be EHT320	Channel:	6105
Polarity:	Horizontal	Test Voltage:	DC 12 V

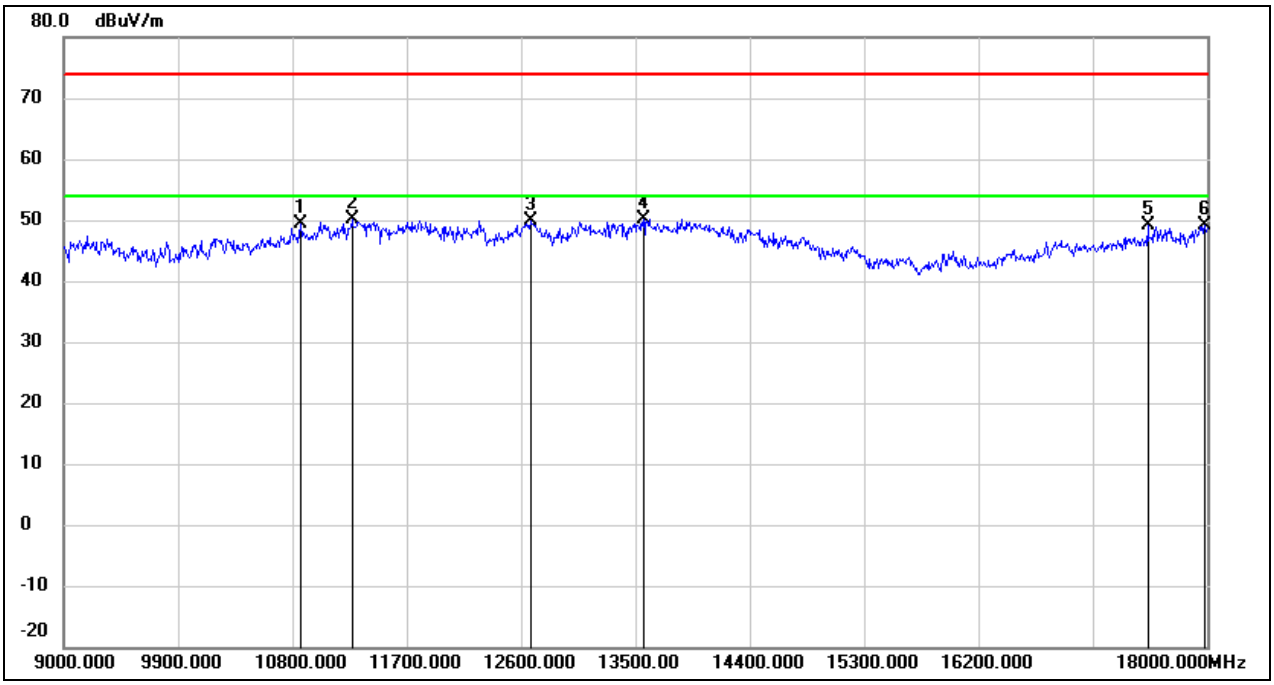

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10863.000	34.97	14.31	49.28	74.00	-24.72	peak
2	11268.000	34.46	15.71	50.17	74.00	-23.83	peak
3	12672.000	31.90	18.00	49.90	74.00	-24.10	peak
4	13563.000	29.14	20.94	50.08	74.00	-23.92	peak
5	17532.000	26.86	22.17	49.03	74.00	-24.97	peak
6	17982.000	24.10	25.04	49.14	74.00	-24.86	peak

Test Mode:	802.11be EHT320	Channel:	6105
Polarity:	Vertical	Test Voltage:	DC 12 V

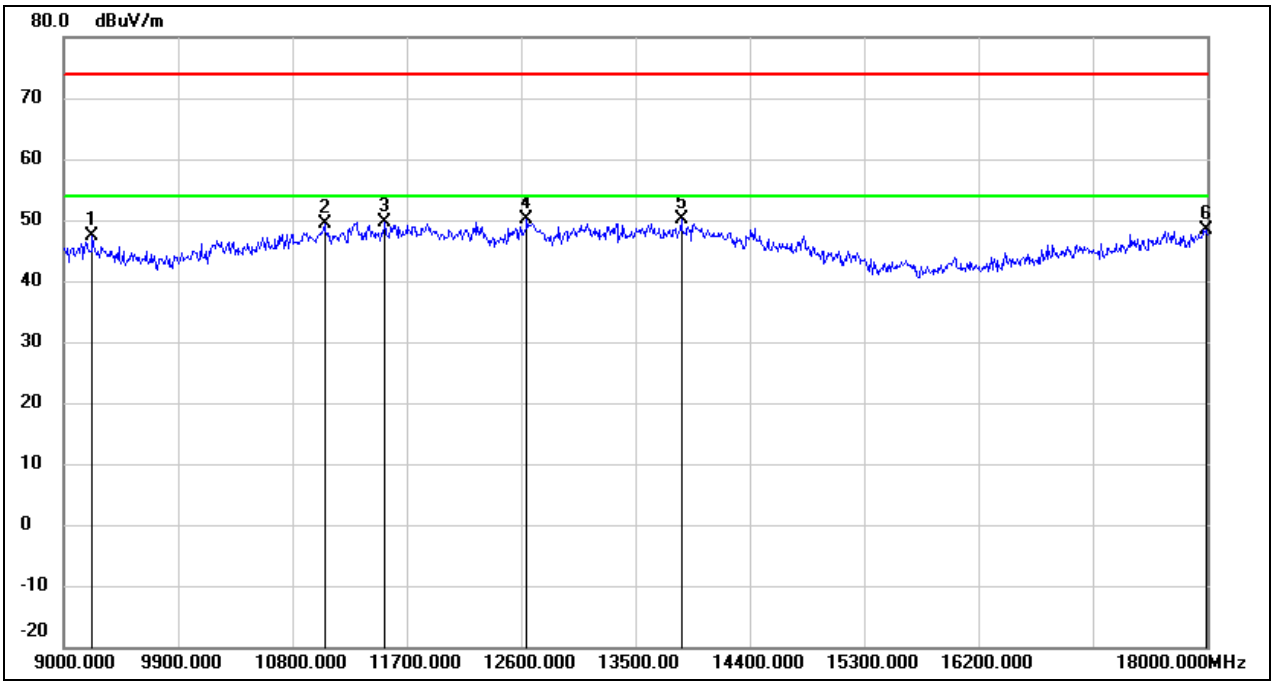

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9225.000	36.49	10.85	47.34	74.00	-26.66	peak
2	11052.000	34.34	14.94	49.28	74.00	-24.72	peak
3	11529.000	33.06	16.61	49.67	74.00	-24.33	peak
4	12645.000	32.17	17.92	50.09	74.00	-23.91	peak
5	13860.000	28.46	21.59	50.05	74.00	-23.95	peak
6	17991.000	23.37	25.11	48.48	74.00	-25.52	peak

Test Mode:	802.11be EHT320	Channel:	6265
Polarity:	Horizontal	Test Voltage:	DC 12 V

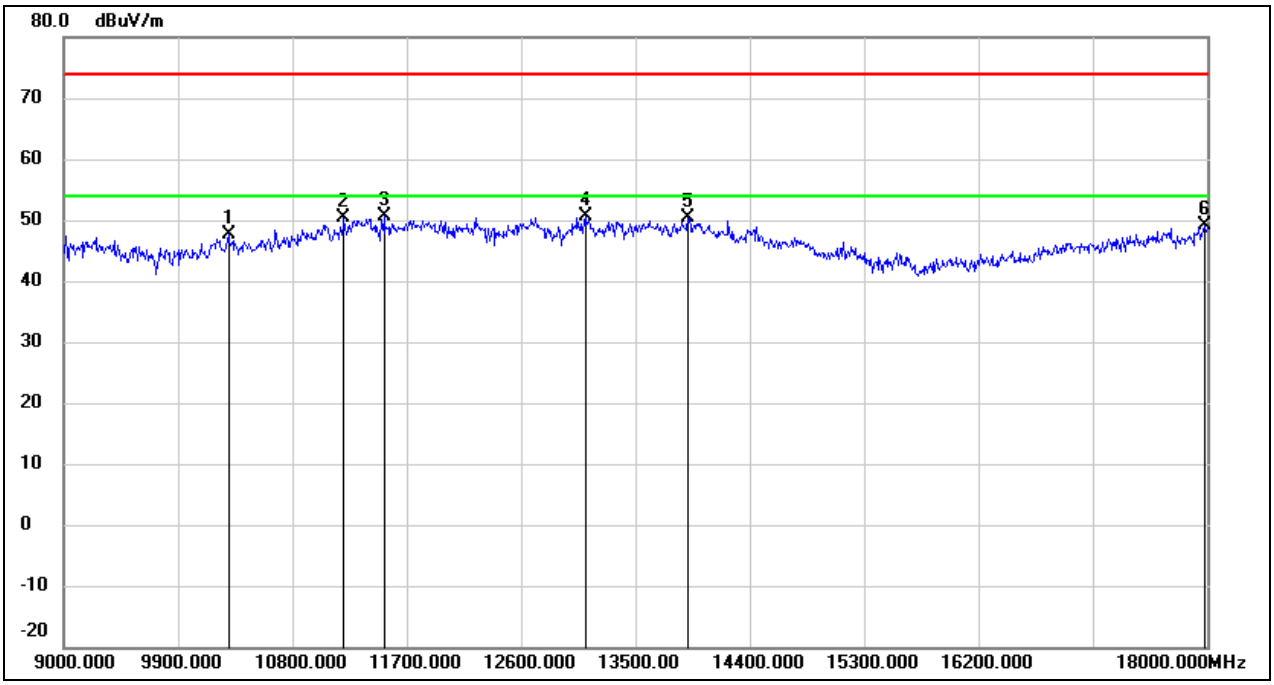

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	34.86	12.69	47.55	74.00	-26.45	peak
2	11205.000	34.81	15.48	50.29	74.00	-23.71	peak
3	11520.000	34.10	16.59	50.69	74.00	-23.31	peak
4	13104.000	31.25	19.29	50.54	74.00	-23.46	peak
5	13914.000	28.64	21.69	50.33	74.00	-23.67	peak
6	17982.000	24.05	25.04	49.09	74.00	-24.91	peak

Test Mode:	802.11be EHT320	Channel:	6265
Polarity:	Vertical	Test Voltage:	DC 12 V

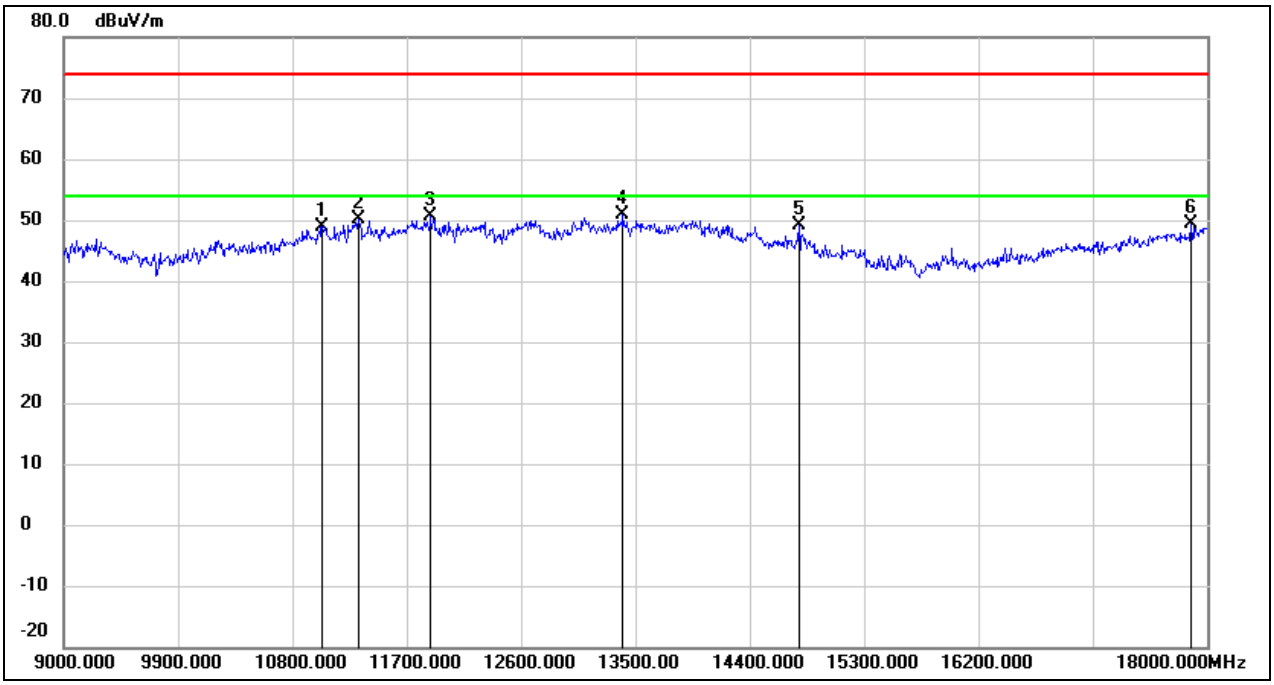

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11034.000	34.06	14.87	48.93	74.00	-25.07	peak
2	11322.000	34.12	15.90	50.02	74.00	-23.98	peak
3	11889.000	32.99	17.60	50.59	74.00	-23.41	peak
4	13401.000	30.56	20.43	50.99	74.00	-23.01	peak
5	14787.000	30.56	18.48	49.04	74.00	-24.96	peak
6	17874.000	25.10	24.35	49.45	74.00	-24.55	peak

Test Mode:	802.11be EHT320	Channel:	6585
Polarity:	Horizontal	Test Voltage:	DC 12 V

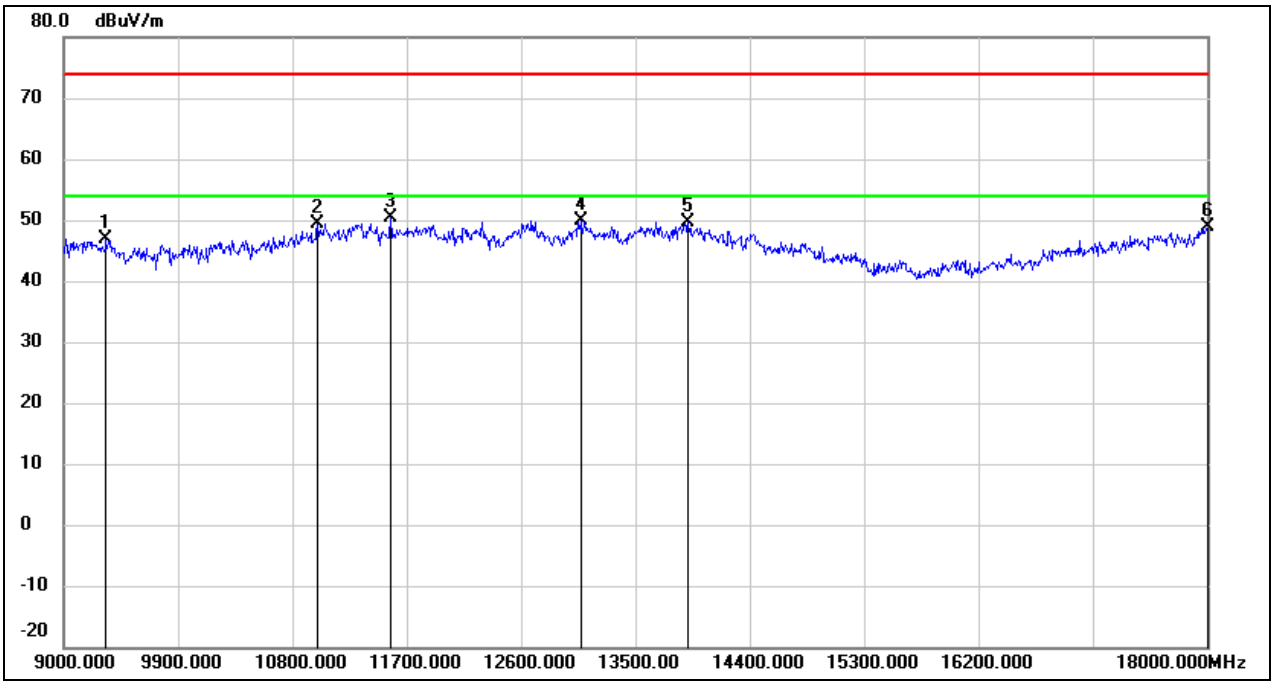

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9333.000	36.02	10.86	46.88	74.00	-27.12	peak
2	10998.000	34.55	14.75	49.30	74.00	-24.70	peak
3	11574.000	33.52	16.74	50.26	74.00	-23.74	peak
4	13068.000	30.73	19.15	49.88	74.00	-24.12	peak
5	13914.000	27.97	21.69	49.66	74.00	-24.34	peak
6	18000.000	23.61	25.16	48.77	74.00	-25.23	peak

Test Mode:	802.11be EHT320	Channel:	6585
Polarity:	Vertical	Test Voltage:	DC 12 V

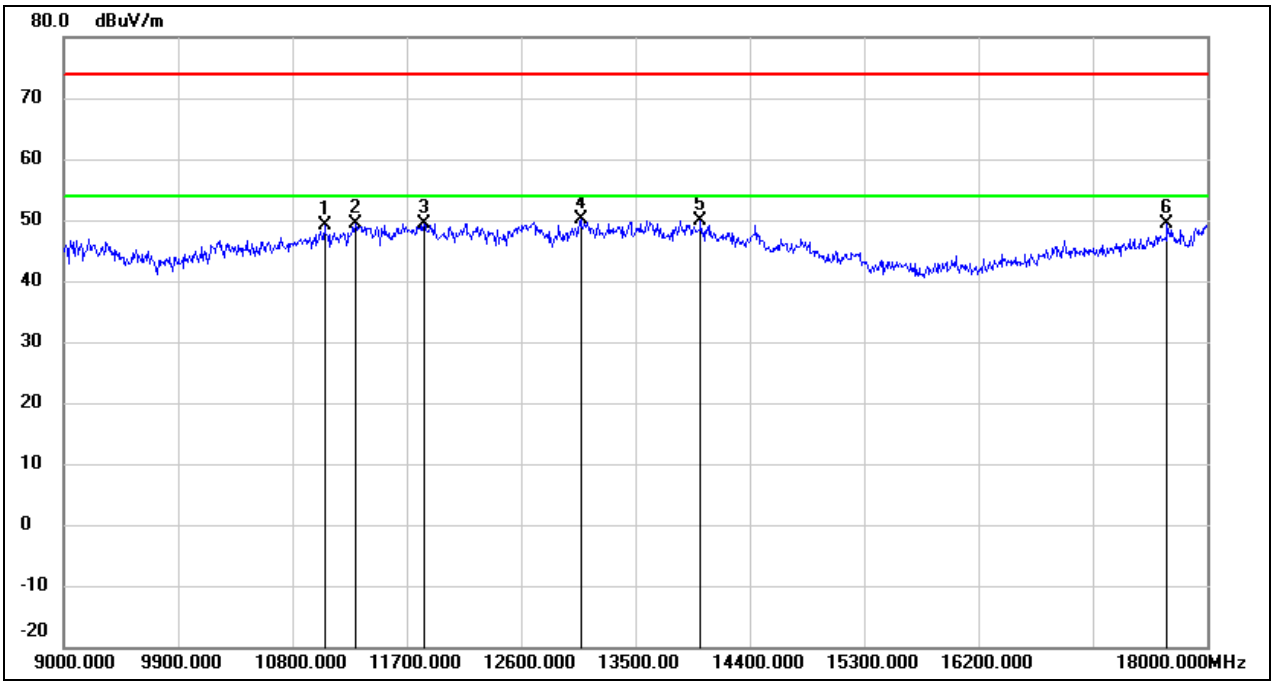

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11052.000	34.10	14.94	49.04	74.00	-24.96	peak
2	11295.000	33.70	15.80	49.50	74.00	-24.50	peak
3	11835.000	32.02	17.46	49.48	74.00	-24.52	peak
4	13068.000	31.01	19.15	50.16	74.00	-23.84	peak
5	14013.000	28.18	21.82	50.00	74.00	-24.00	peak
6	17685.000	26.29	23.14	49.43	74.00	-24.57	peak

Test Mode:	802.11be EHT320	Channel:	6905
Polarity:	Horizontal	Test Voltage:	DC 12 V

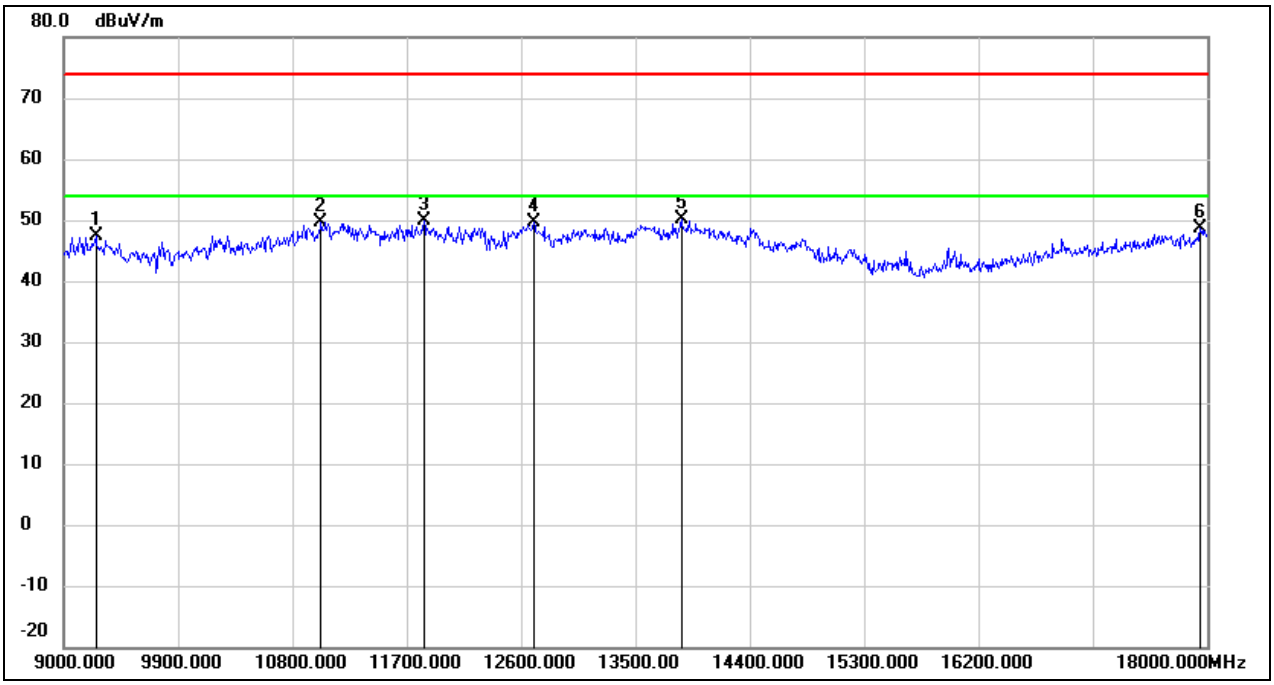

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9252.000	36.42	10.85	47.27	74.00	-26.73	peak
2	11025.000	34.87	14.83	49.70	74.00	-24.30	peak
3	11835.000	32.51	17.46	49.97	74.00	-24.03	peak
4	12699.000	31.52	18.07	49.59	74.00	-24.41	peak
5	13860.000	28.56	21.59	50.15	74.00	-23.85	peak
6	17946.000	23.74	24.82	48.56	74.00	-25.44	peak

Test Mode:	802.11be EHT320	Channel:	6905
Polarity:	Vertical	Test Voltage:	DC 12 V

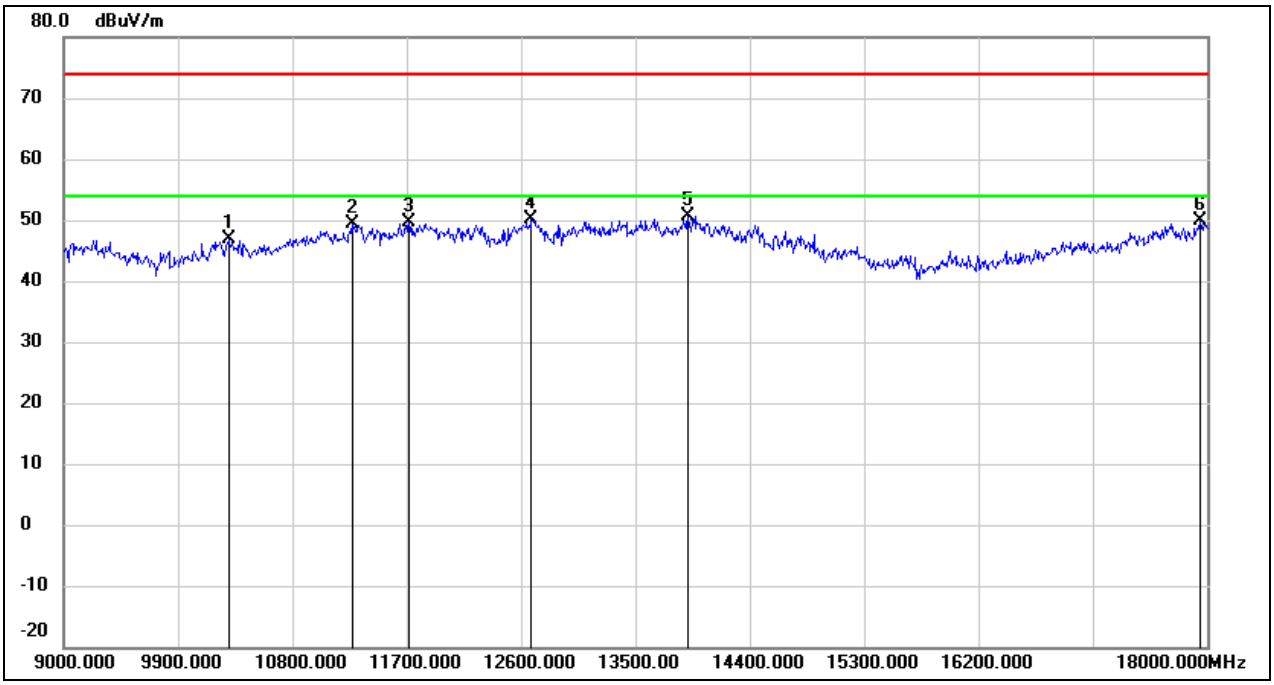

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	34.09	12.69	46.78	74.00	-27.22	peak
2	11268.000	33.57	15.71	49.28	74.00	-24.72	peak
3	11718.000	32.48	17.13	49.61	74.00	-24.39	peak
4	12681.000	32.04	18.03	50.07	74.00	-23.93	peak
5	13914.000	29.03	21.69	50.72	74.00	-23.28	peak
6	17946.000	24.99	24.82	49.81	74.00	-24.19	peak

8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Horizontal	Test Voltage:	DC 12 V

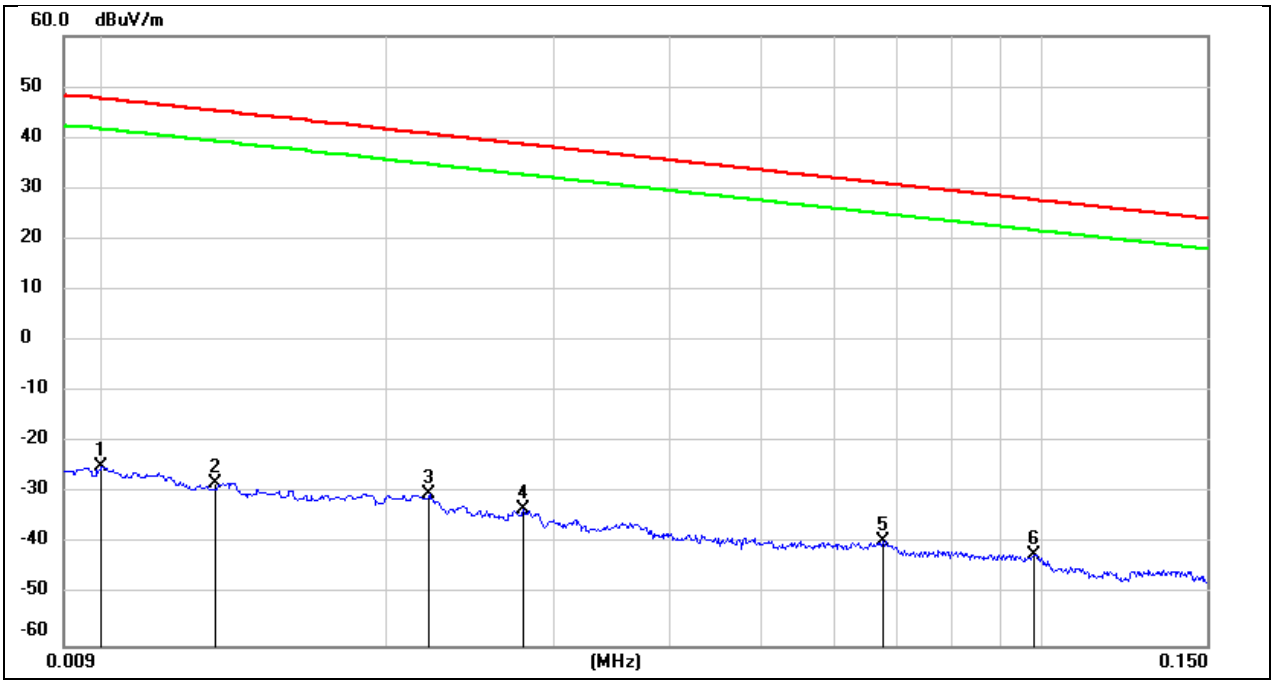

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0100	76.72	-101.40	-24.68	47.60	-72.28	peak
2	0.0131	73.45	-101.38	-27.93	45.25	-73.18	peak
3	0.0221	71.13	-101.35	-30.22	40.71	-70.93	peak
4	0.0279	68.17	-101.38	-33.21	38.69	-71.90	peak
5	0.0675	62.14	-101.56	-39.42	31.02	-70.44	peak
6	0.0981	59.77	-101.78	-42.01	27.77	-69.78	peak

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Horizontal	Test Voltage:	DC 12 V

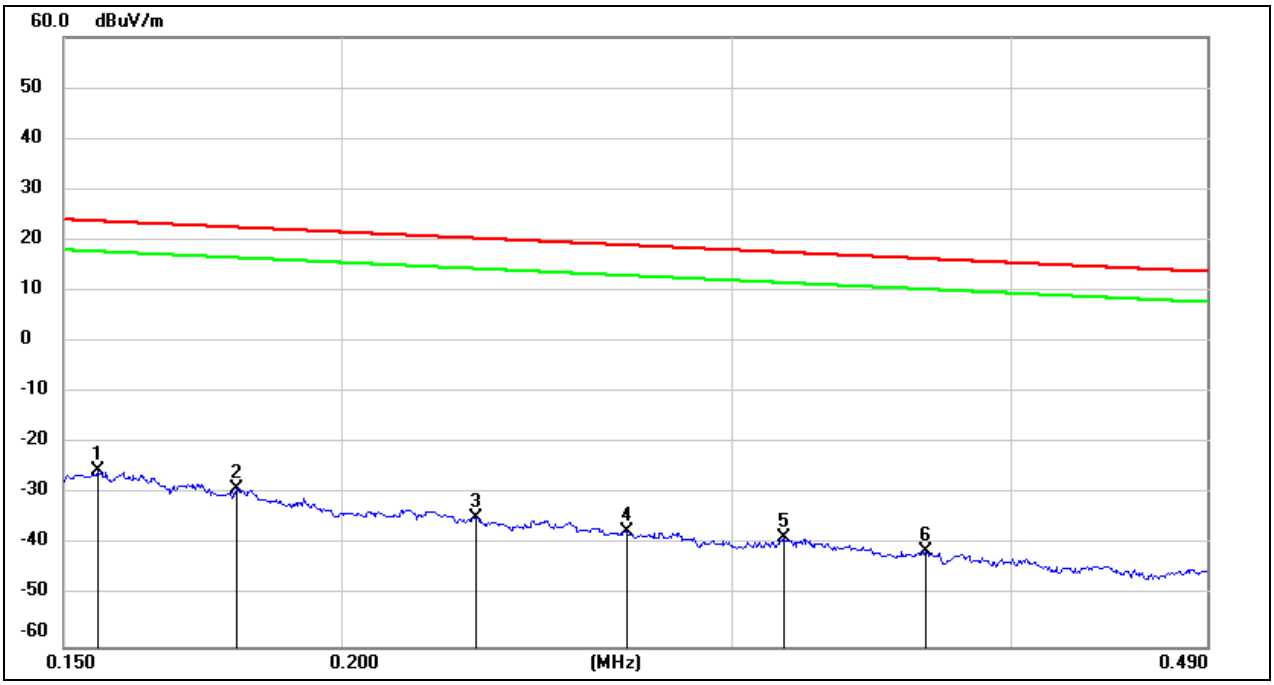

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	76.27	-101.65	-25.38	23.77	-49.15	peak
2	0.1794	72.77	-101.68	-28.91	22.53	-51.44	peak
3	0.2300	67.03	-101.77	-34.74	20.37	-55.11	peak
4	0.2690	64.48	-101.82	-37.34	19.01	-56.35	peak
5	0.3163	63.20	-101.87	-38.67	17.60	-56.27	peak
6	0.3662	60.58	-101.93	-41.35	16.33	-57.68	peak

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Horizontal	Test Voltage:	DC 12 V

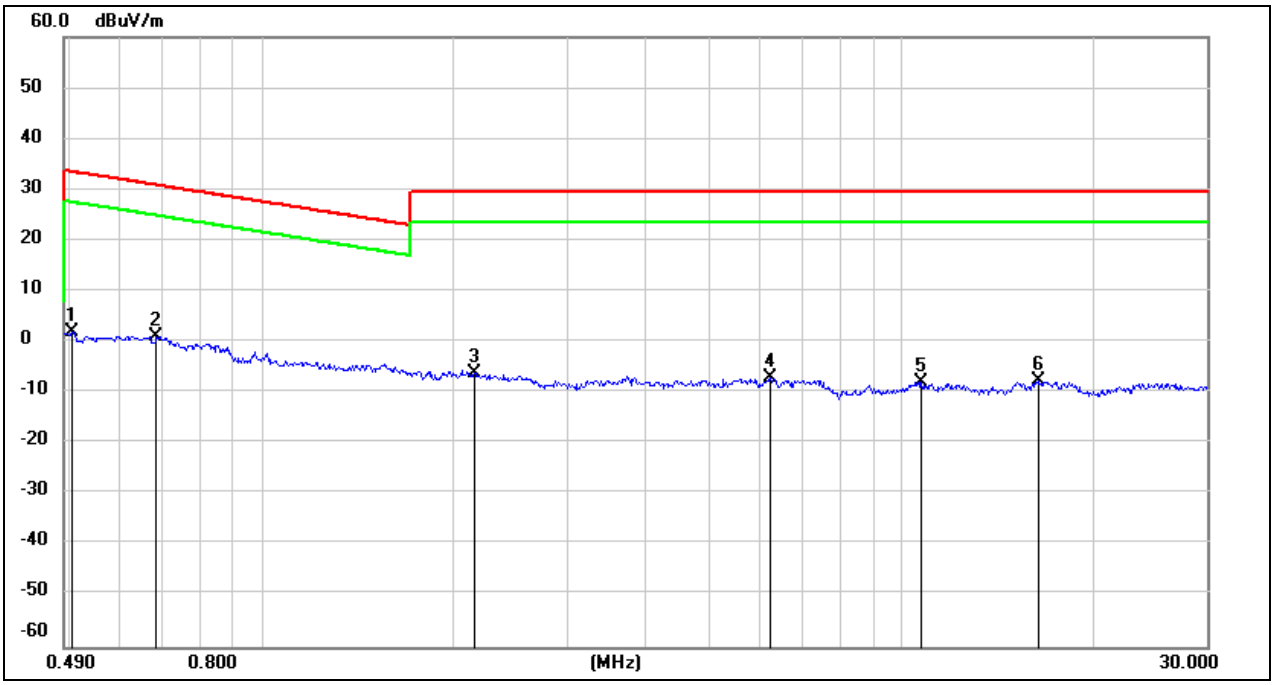

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	63.93	-62.07	1.86	33.56	-31.70	peak
2	0.6834	63.21	-62.11	1.10	30.91	-29.81	peak
3	2.1463	55.77	-61.79	-6.02	29.54	-35.56	peak
4	6.2445	54.13	-61.32	-7.19	29.54	-36.73	peak
5	10.7299	52.98	-60.83	-7.85	29.54	-37.39	peak
6	16.3959	53.17	-60.96	-7.79	29.54	-37.33	peak

8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Horizontal	Test Voltage:	DC 12 V

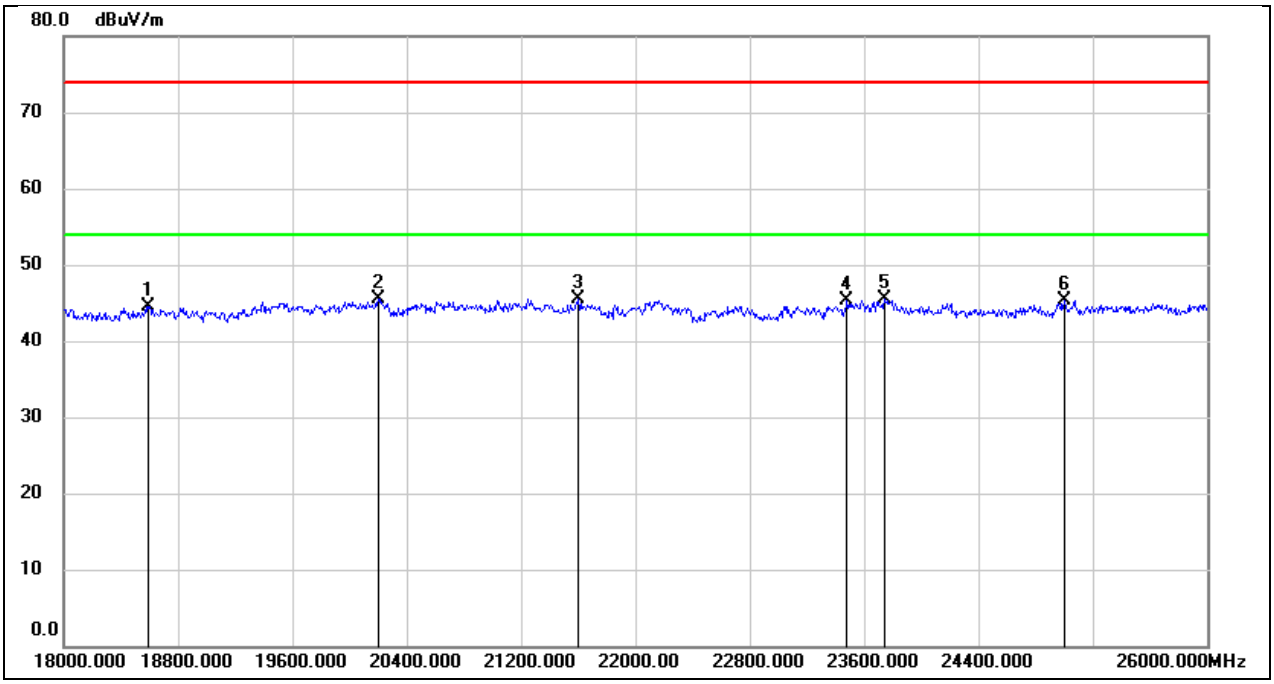

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18592.000	49.75	-5.31	44.44	74.00	-29.56	peak
2	20200.000	51.04	-5.58	45.46	74.00	-28.54	peak
3	21600.000	50.02	-4.54	45.48	74.00	-28.52	peak
4	23480.000	48.54	-3.16	45.38	74.00	-28.62	peak
5	23744.000	48.65	-3.20	45.45	74.00	-28.55	peak
6	25000.000	47.36	-2.10	45.26	74.00	-28.74	peak

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Vertical	Test Voltage:	DC 12 V

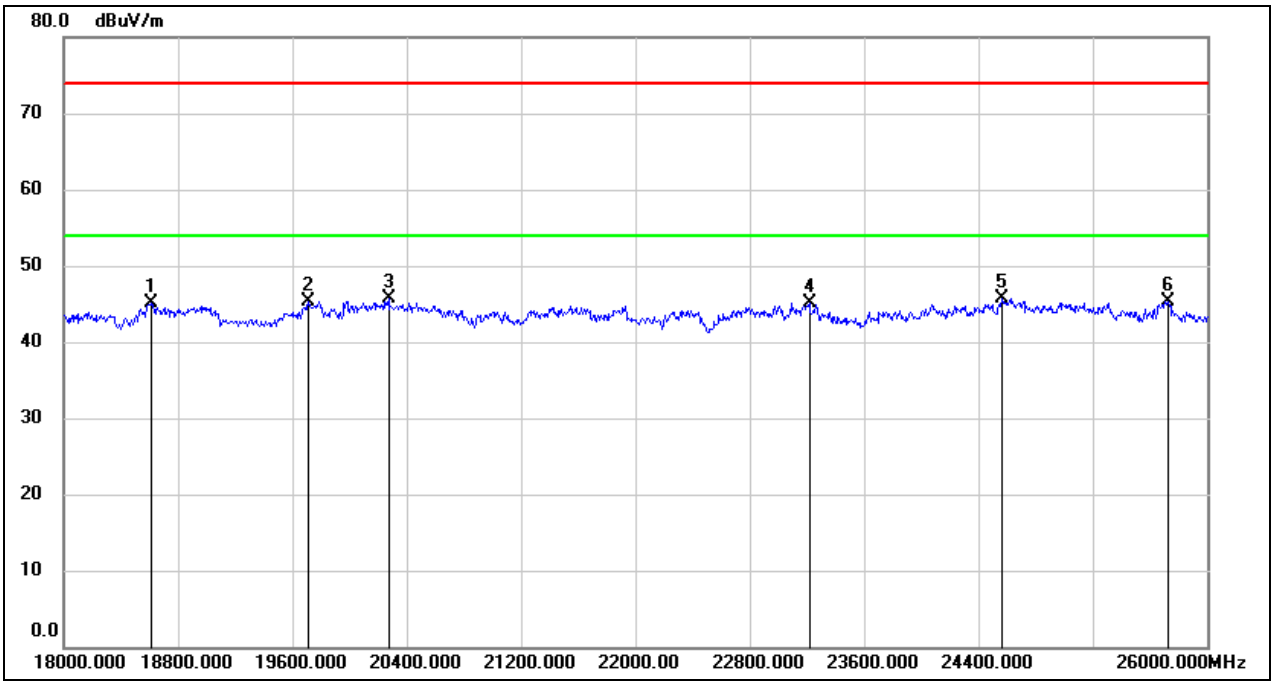

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	50.39	-5.34	45.05	74.00	-28.95	peak
2	19712.000	50.51	-5.29	45.22	74.00	-28.78	peak
3	20272.000	51.27	-5.60	45.67	74.00	-28.33	peak
4	23216.000	48.51	-3.38	45.13	74.00	-28.87	peak
5	24568.000	48.10	-2.33	45.77	74.00	-28.23	peak
6	25728.000	46.11	-0.72	45.39	74.00	-28.61	peak

8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Horizontal	Test Voltage:	DC 12 V

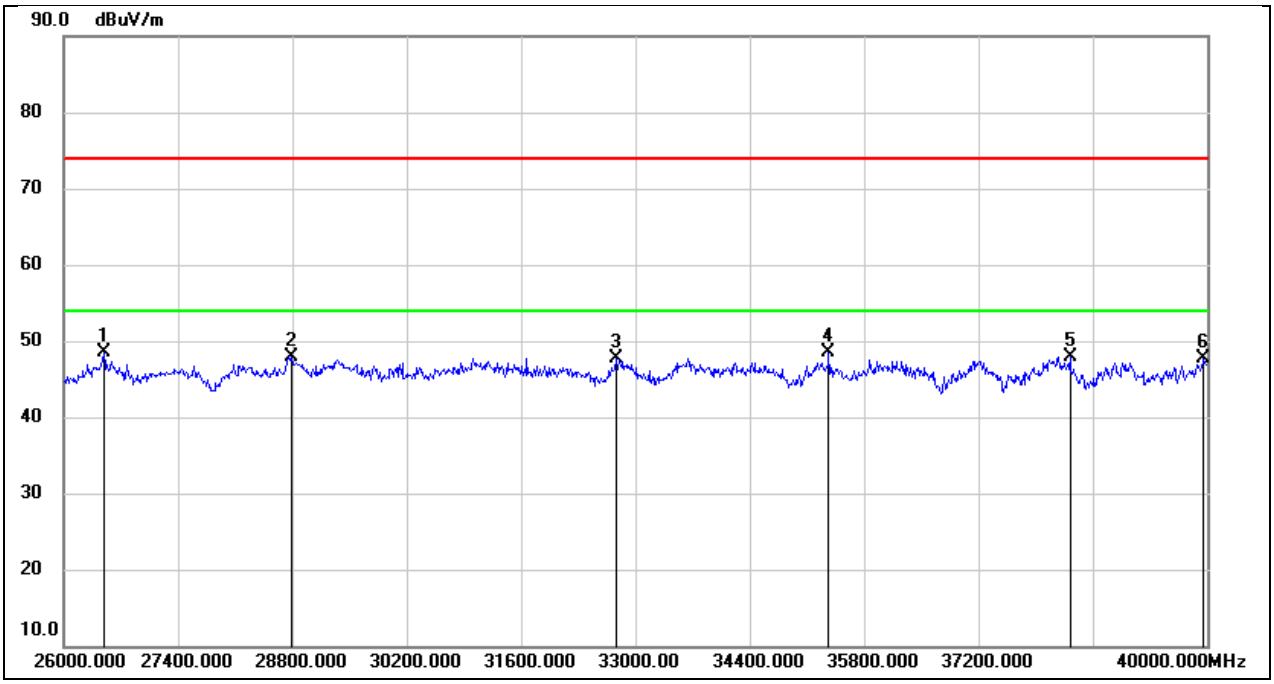

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	53.29	-4.74	48.55	74.00	-25.45	peak
2	28786.000	48.49	-0.64	47.85	74.00	-26.15	peak
3	32762.000	48.95	-1.21	47.74	74.00	-26.26	peak
4	35366.000	45.90	2.59	48.49	74.00	-25.51	peak
5	38320.000	44.06	3.77	47.83	74.00	-26.17	peak
6	39958.000	42.58	5.12	47.70	74.00	-26.30	peak

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Vertical	Test Voltage:	DC 12 V

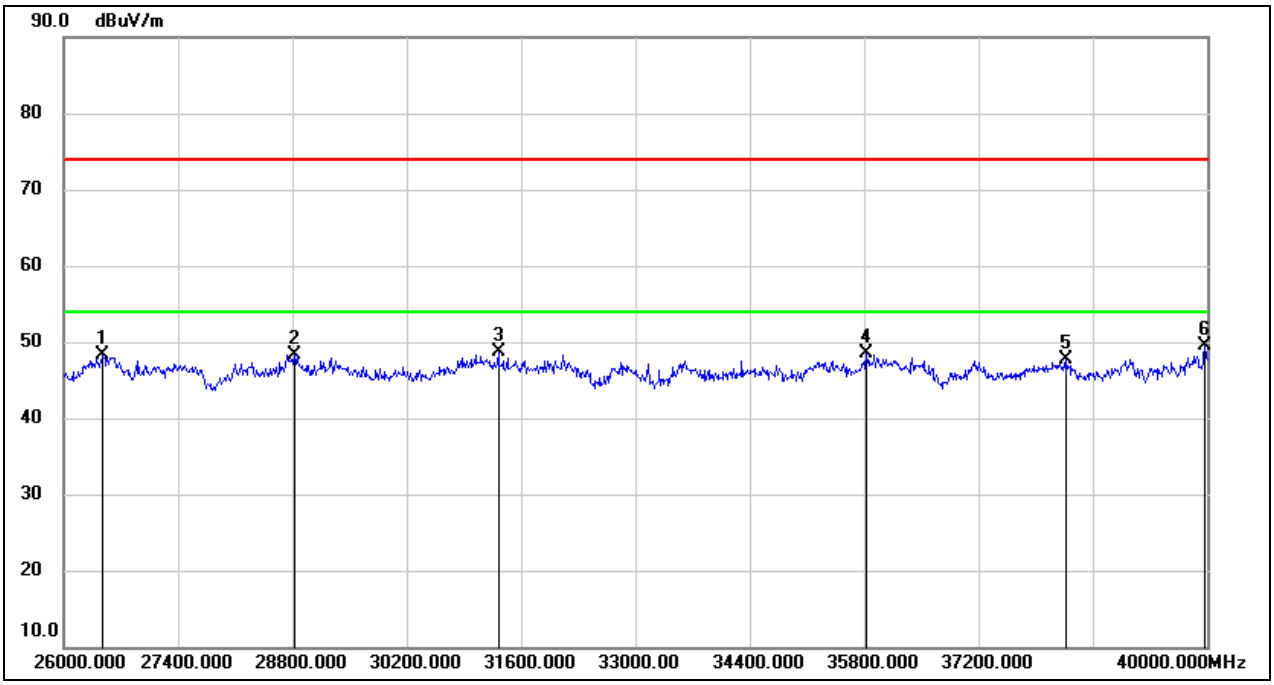

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26476.000	53.03	-4.78	48.25	74.00	-25.75	peak
2	28828.000	49.13	-0.79	48.34	74.00	-25.66	peak
3	31320.000	49.61	-0.93	48.68	74.00	-25.32	peak
4	35828.000	44.75	3.67	48.42	74.00	-25.58	peak
5	38278.000	43.82	3.82	47.64	74.00	-26.36	peak
6	39972.000	44.45	5.13	49.58	74.00	-24.42	peak

8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Horizontal	Test Voltage:	DC 12 V

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	47.33	-18.99	28.34	40.00	-11.66	QP
2	74.6200	54.14	-21.12	33.02	40.00	-6.98	QP
3	165.8000	46.92	-17.19	29.73	43.50	-13.77	QP
4	323.9100	44.67	-14.09	30.58	46.00	-15.42	QP
5	532.4600	43.63	-10.48	33.15	46.00	-12.85	QP
6	874.8700	43.38	-5.44	37.94	46.00	-8.06	QP

Test Mode:	802.11ax HE20	Channel:	5955
Polarity:	Vertical	Test Voltage:	DC 12 V

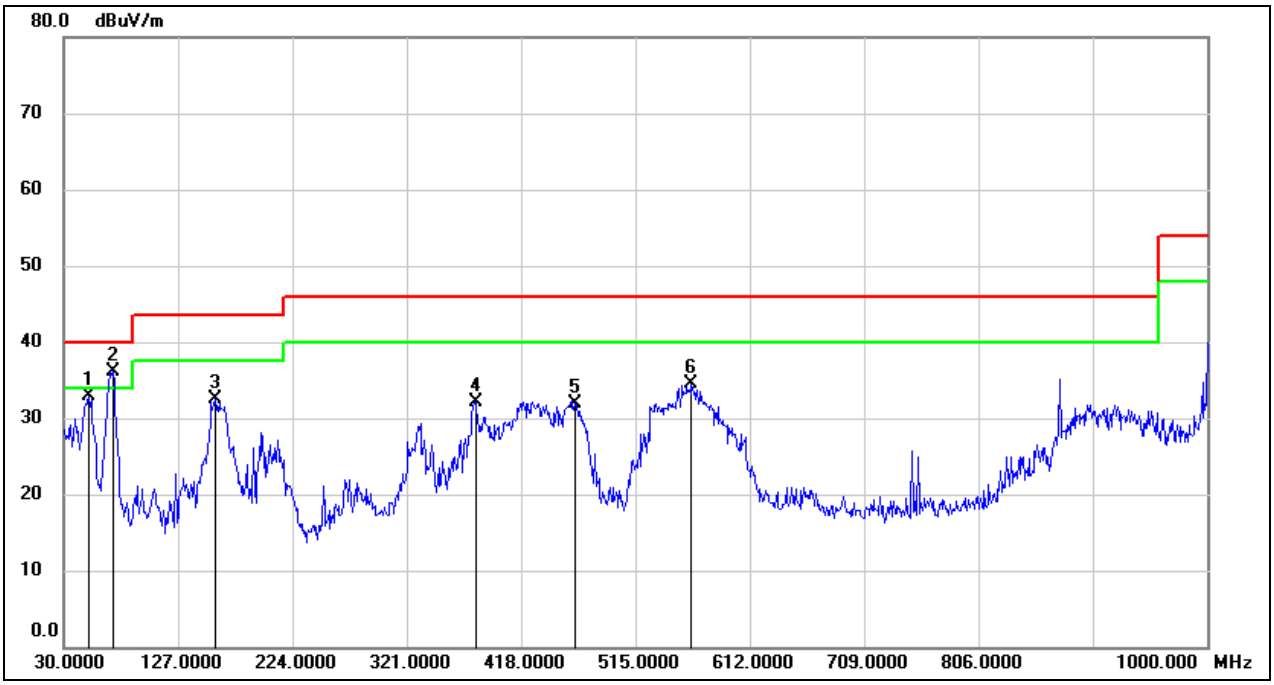

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	53.44	-20.53	32.91	40.00	-7.09	QP
2	71.7100	56.91	-20.90	36.01	40.00	-3.99	QP
3	159.0100	50.15	-17.63	32.52	43.50	-10.98	QP
4	379.2000	44.89	-12.86	32.03	46.00	-13.97	QP
5	463.5900	43.38	-11.38	32.00	46.00	-14.00	QP
6	562.5300	44.74	-10.22	34.52	46.00	-11.48	QP

8.8. SIMULTANEOUSLY TRANSMISSION SPURIOUS EMISSIONS

(1 GHz~18 GHz) (Worst case)

Test Mode:	WIFI 2.4G 802.11b Mode 2437 MHz &WIFI 5G 802.11a Mode 5745 MHz& WIFI 6G 802.11be EHT320 Mode 6585 MHz		
Polarity:	Horizontal	Test Voltage:	DC 12 V

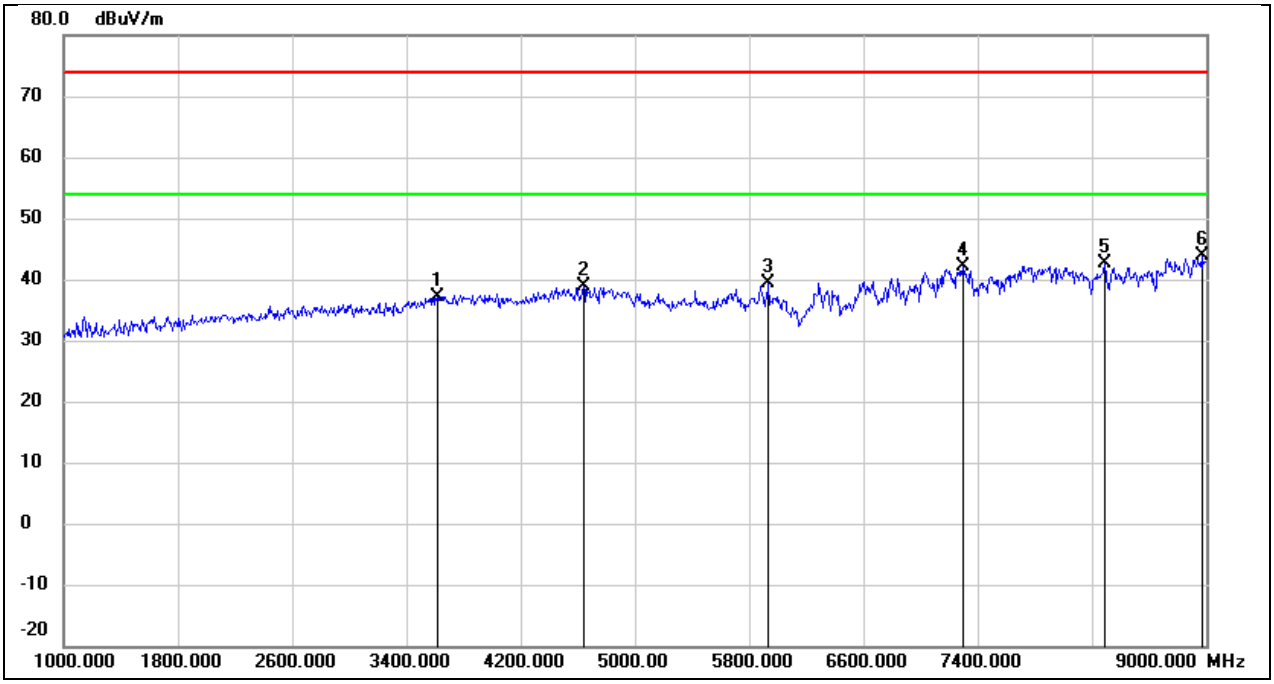

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3616.000	42.75	-5.53	37.22	74.00	-36.78	peak
2	4640.000	40.48	-1.58	38.90	74.00	-35.10	peak
3	5936.000	37.63	1.67	39.30	74.00	-34.70	peak
4	7296.000	36.29	5.90	42.19	74.00	-31.81	peak
5	8288.000	36.69	5.98	42.67	74.00	-31.33	peak
6	8968.000	34.43	9.51	43.94	74.00	-30.06	peak

Test Mode:	WIFI 2.4G 802.11b Mode 2437 MHz &WIFI 5G 802.11a Mode 5745 MHz& WIFI 6G 802.11be EHT320 Mode 6585 MHz		
Polarity:	Vertical	Test Voltage:	DC 12 V

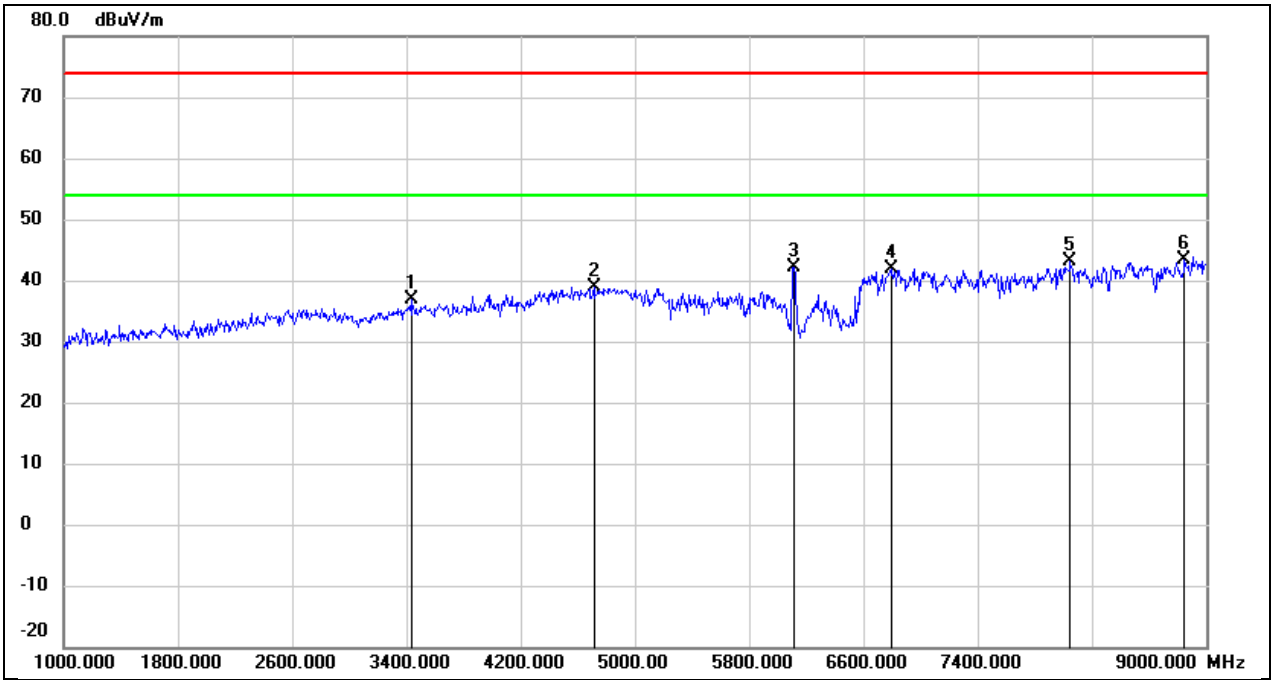

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3432.000	42.80	-6.00	36.80	74.00	-37.20	peak
2	4712.000	40.19	-1.29	38.90	74.00	-35.10	peak
3	6112.000	39.92	2.27	42.19	74.00	-31.81	peak
4	6792.000	36.75	5.18	41.93	74.00	-32.07	peak
5	8048.000	37.37	5.70	43.07	74.00	-30.93	peak
6	8848.000	34.72	8.67	43.39	74.00	-30.61	peak

Test Mode:	WIFI 2.4G 802.11b Mode 2437 MHz &WIFI 5G 802.11a Mode 5745 MHz& WIFI 6G 802.11be EHT320 Mode 6585 MHz		
Polarity:	Horizontal	Test Voltage:	DC 12 V

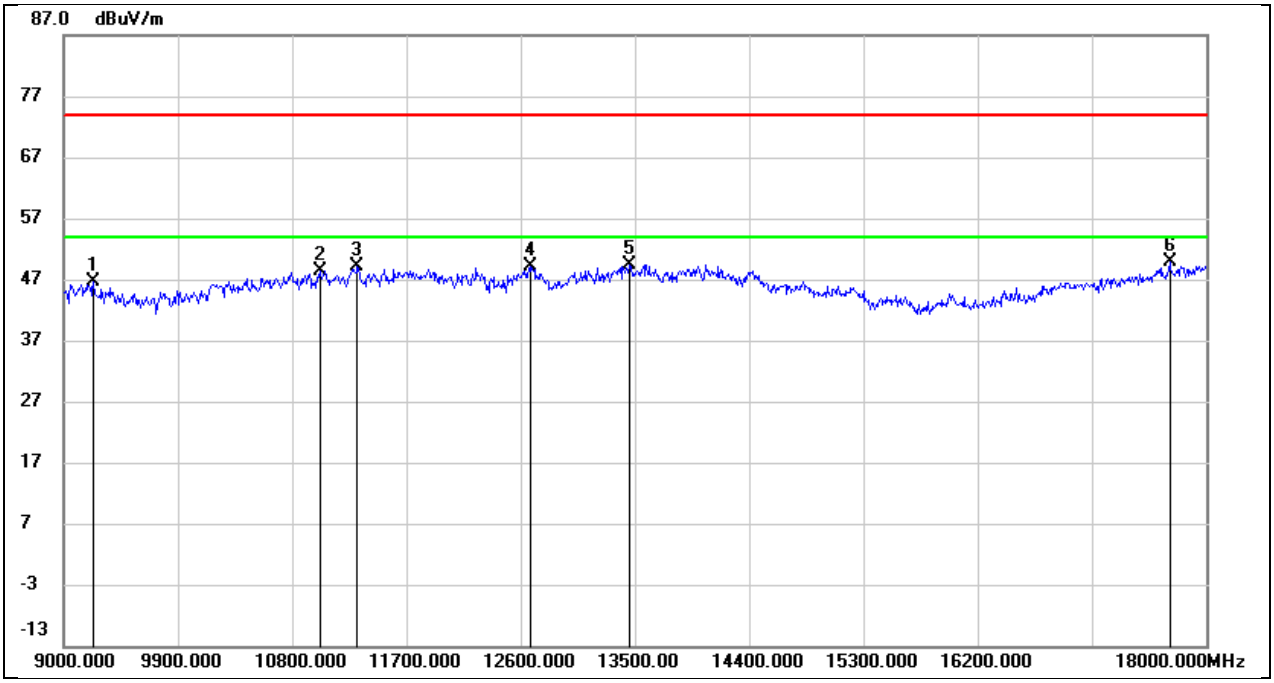

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9234.000	35.78	10.84	46.62	74.00	-27.38	peak
2	11016.000	33.68	14.81	48.49	74.00	-25.51	peak
3	11313.000	33.26	15.86	49.12	74.00	-24.88	peak
4	12681.000	31.19	18.03	49.22	74.00	-24.78	peak
5	13455.000	28.77	20.64	49.41	74.00	-24.59	peak
6	17712.000	26.62	23.32	49.94	74.00	-24.06	peak

Test Mode:	WIFI 2.4G 802.11b Mode 2437 MHz &WIFI 5G 802.11a Mode 5745 MHz& WIFI 6G 802.11be EHT320 Mode 6585 MHz		
Polarity:	Vertical	Test Voltage:	DC 12 V

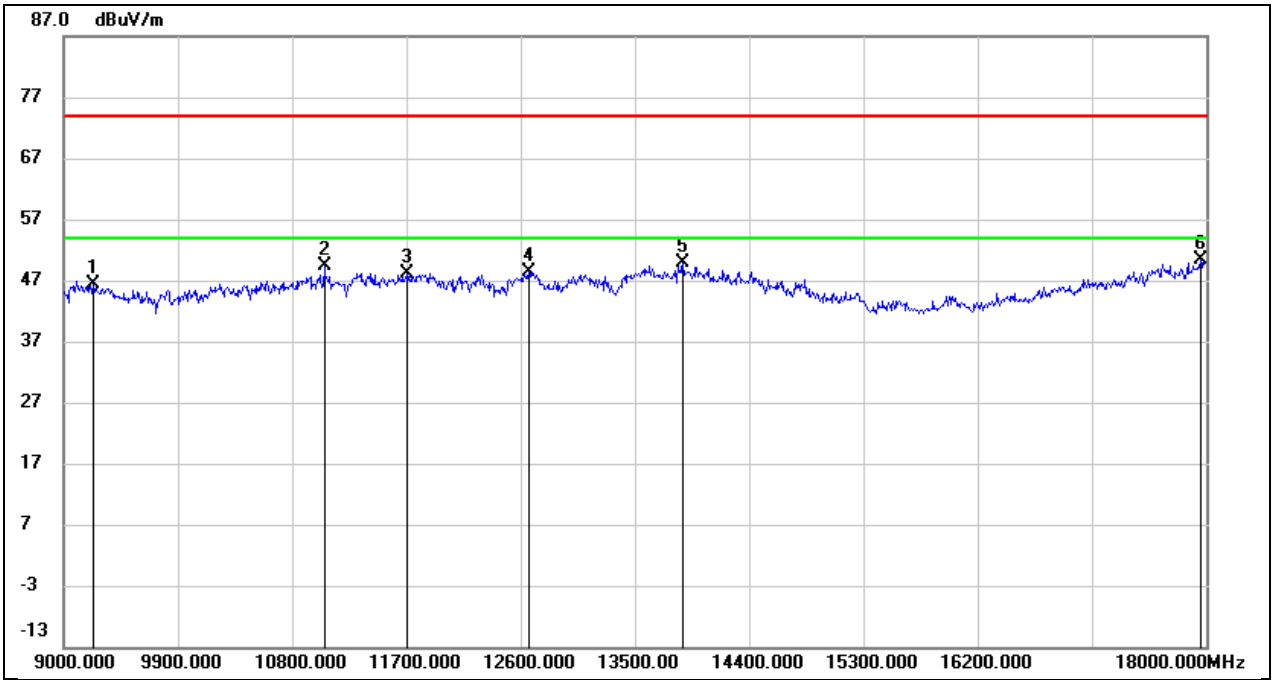

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9234.000	35.49	10.84	46.33	74.00	-27.67	peak
2	11052.000	34.54	14.94	49.48	74.00	-24.52	peak
3	11709.000	30.95	17.11	48.06	74.00	-25.94	peak
4	12663.000	30.39	17.98	48.37	74.00	-25.63	peak
5	13878.000	28.18	21.62	49.80	74.00	-24.20	peak
6	17955.000	25.42	24.87	50.29	74.00	-23.71	peak

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

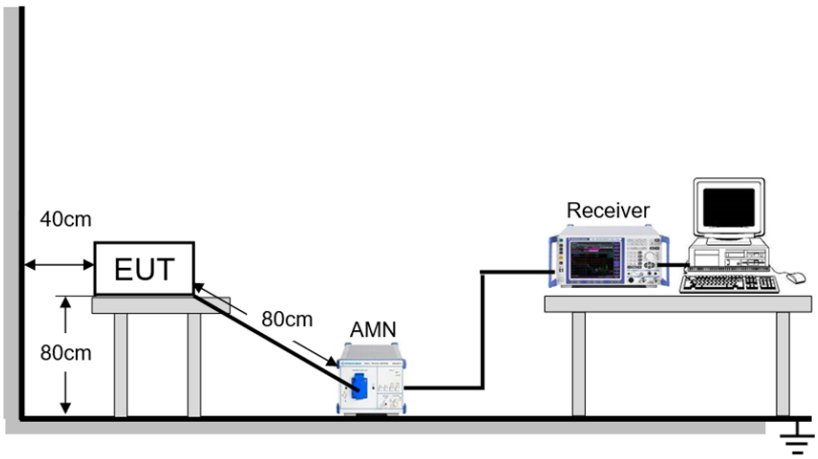

TEST ENVIRONMENT

Temperature	25.2℃	Relative Humidity	57%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	May 26, 2023	Test By	Karl Wu

TEST RESULTS

Test Mode:	802.11ax HE20	Channel:	5955
Line:	Line	Test Voltage:	AC 120 V, 60 Hz

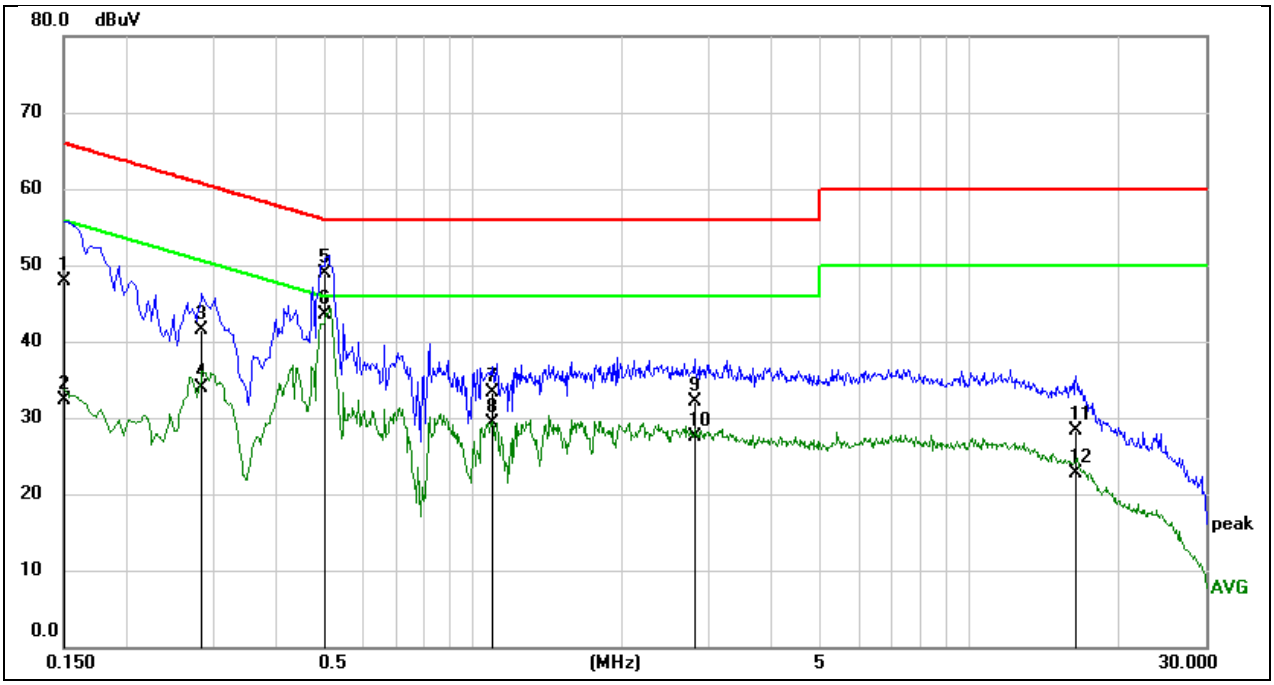

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1511	38.29	9.59	47.88	65.94	-18.06	QP
2	0.1511	22.80	9.59	32.39	55.94	-23.55	AVG
3	0.2859	31.88	9.59	41.47	60.64	-19.17	QP
4	0.2859	24.39	9.59	33.98	50.64	-16.66	AVG
5	0.5058	39.34	9.60	48.94	56.00	-7.06	QP
6	0.5058	33.85	9.60	43.45	46.00	-2.55	AVG
7	1.0910	23.75	9.61	33.36	56.00	-22.64	QP
8	1.0910	19.66	9.61	29.27	46.00	-16.73	AVG
9	2.8265	22.44	9.66	32.10	56.00	-23.90	QP
10	2.8265	17.89	9.66	27.55	46.00	-18.45	AVG
11	16.4732	18.62	9.76	28.38	60.00	-31.62	QP
12	16.4732	13.03	9.76	22.79	50.00	-27.21	AVG

Note:
1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11ax HE20	Channel:	5955
Line:	Neutral	Test Voltage:	AC 120 V, 60 Hz

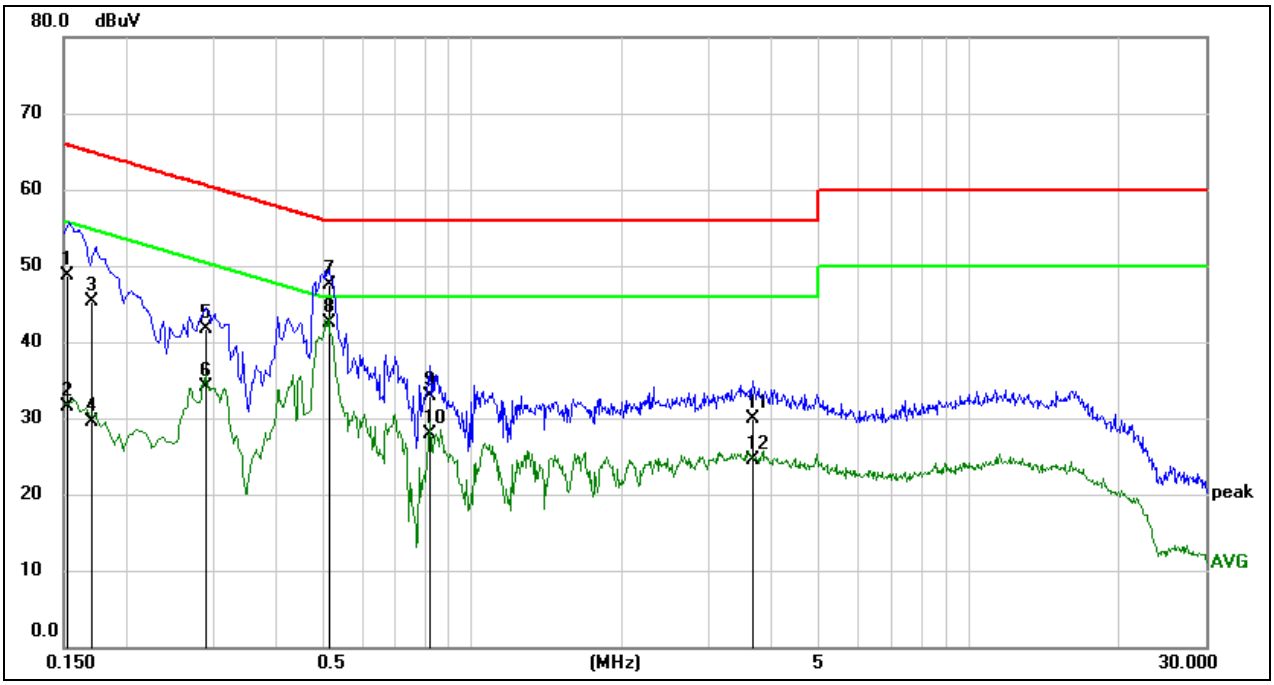

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	39.03	9.59	48.62	65.88	-17.26	QP
2	0.1522	21.90	9.59	31.49	55.88	-24.39	AVG
3	0.1703	35.78	9.59	45.37	64.95	-19.58	QP
4	0.1703	19.91	9.59	29.50	54.95	-25.45	AVG
5	0.2884	32.09	9.59	41.68	60.57	-18.89	QP
6	0.2884	24.46	9.59	34.05	50.57	-16.52	AVG
7	0.5115	37.92	9.60	47.52	56.00	-8.48	QP
8	0.5115	32.96	9.60	42.56	46.00	-3.44	AVG
9	0.8196	23.24	9.60	32.84	56.00	-23.16	QP
10	0.8196	18.27	9.60	27.87	46.00	-18.13	AVG
11	3.6590	20.19	9.69	29.88	56.00	-26.12	QP
12	3.6590	14.79	9.69	24.48	46.00	-21.52	AVG

Note:
1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)
For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH

11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11AX20MIMO	Ant3	5955	23.20	5943.44	5966.64	PASS
	Ant6	5955	22.44	5943.64	5966.08	PASS
	Ant3	6115	22.60	6103.64	6126.24	PASS
	Ant6	6115	22.44	6103.84	6126.28	PASS
	Ant3	6275	22.48	6263.68	6286.16	PASS
	Ant6	6275	22.72	6263.52	6286.24	PASS
	Ant3	6415	22.36	6403.80	6426.16	PASS
	Ant6	6415	22.64	6403.84	6426.48	PASS
	Ant3	6435	22.20	6423.92	6446.12	PASS
	Ant6	6435	22.56	6423.60	6446.16	PASS
	Ant3	6475	22.60	6464.04	6486.64	PASS
	Ant6	6475	22.36	6463.80	6486.16	PASS
	Ant3	6515	22.88	6503.40	6526.28	PASS
	Ant6	6515	22.44	6503.92	6526.36	PASS
	Ant3	6535	22.56	6523.64	6546.20	PASS
	Ant6	6535	22.28	6523.92	6546.20	PASS
	Ant3	6715	22.44	6703.84	6726.28	PASS
	Ant6	6715	22.72	6703.68	6726.40	PASS
	Ant3	6875	22.36	6863.76	6886.12	PASS
	Ant6	6875	22.28	6863.76	6886.04	PASS
	Ant3	6895	22.52	6883.88	6906.40	PASS
	Ant6	6895	22.68	6883.56	6906.24	PASS
	Ant3	7015	22.44	7003.76	7026.20	PASS
	Ant6	7015	22.48	7003.80	7026.28	PASS
	Ant3	7095	22.52	7083.88	7106.40	PASS
	Ant6	7095	22.92	7083.84	7106.76	PASS
	Ant3	7115	23.32	7103.88	7127.20	PASS
	Ant6	7115	22.32	7103.88	7126.20	PASS
11AX40MIMO	Ant3	5965	44.64	5942.68	5987.32	PASS
	Ant6	5965	44.00	5943.08	5987.08	PASS
	Ant3	6125	44.32	6103.24	6147.56	PASS
	Ant6	6125	43.44	6103.48	6146.92	PASS
	Ant3	6285	44.48	6262.20	6306.68	PASS
	Ant6	6285	45.36	6262.44	6307.80	PASS
	Ant3	6405	44.00	6383.16	6427.16	PASS
	Ant6	6405	43.84	6383.32	6427.16	PASS
	Ant3	6445	43.52	6423.32	6466.84	PASS
	Ant6	6445	44.48	6423.08	6467.56	PASS
	Ant3	6485	43.76	6463.08	6506.84	PASS
	Ant6	6485	44.80	6462.76	6507.56	PASS
	Ant3	6525	44.48	6502.44	6546.92	PASS
	Ant6	6525	44.56	6502.44	6547.00	PASS
	Ant3	6725	44.00	6703.08	6747.08	PASS
	Ant6	6725	43.92	6703.08	6747.00	PASS
	Ant3	6845	44.32	6822.44	6866.76	PASS
	Ant6	6845	44.56	6822.68	6867.24	PASS
	Ant3	6885	44.08	6863.00	6907.08	PASS
	Ant6	6885	44.56	6862.60	6907.16	PASS
	Ant3	7005	44.08	6983.00	7027.08	PASS
	Ant6	7005	44.08	6983.00	7027.08	PASS
	Ant3	7085	44.32	7063.08	7107.40	PASS

	Ant6	7085	45.12	7062.36	7107.48	PASS
11AX80MIMO	Ant3	5985	88.64	5940.52	6029.16	PASS
	Ant6	5985	90.24	5940.04	6030.28	PASS
	Ant3	6145	88.96	6100.20	6189.16	PASS
	Ant6	6145	89.12	6099.88	6189.00	PASS
	Ant3	6225	89.28	6178.76	6268.04	PASS
	Ant6	6225	89.60	6179.72	6269.32	PASS
	Ant3	6385	89.44	6340.36	6429.80	PASS
	Ant6	6385	91.04	6340.04	6431.08	PASS
	Ant3	6465	88.32	6421.48	6509.80	PASS
	Ant6	6465	88.64	6421.48	6510.12	PASS
	Ant3	6545	88.48	6500.36	6588.84	PASS
	Ant6	6545	90.40	6498.76	6589.16	PASS
	Ant3	6705	90.56	6659.72	6750.28	PASS
	Ant6	6705	89.12	6660.68	6749.80	PASS
	Ant3	6865	89.76	6820.04	6909.80	PASS
	Ant6	6865	89.44	6819.56	6909.00	PASS
	Ant3	6945	89.76	6900.20	6989.96	PASS
	Ant6	6945	91.68	6898.76	6990.44	PASS
	Ant3	7025	89.76	6981.16	7070.92	PASS
	Ant6	7025	89.12	6980.68	7069.80	PASS
11AX160MIMO	Ant3	6025	172.80	5939.24	6112.04	PASS
	Ant6	6025	173.44	5939.56	6113.00	PASS
	Ant3	6185	168.96	6099.88	6268.84	PASS
	Ant6	6185	171.52	6097.96	6269.48	PASS
	Ant3	6345	174.08	6256.04	6430.12	PASS
	Ant6	6345	174.08	6256.68	6430.76	PASS
	Ant3	6505	170.88	6420.52	6591.40	PASS
	Ant6	6505	171.84	6419.24	6591.08	PASS
	Ant3	6665	172.80	6578.60	6751.40	PASS
	Ant6	6665	172.48	6577.96	6750.44	PASS
	Ant3	6825	171.52	6737.96	6909.48	PASS
	Ant6	6825	171.84	6738.28	6910.12	PASS
	Ant3	6985	172.48	6899.56	7072.04	PASS
	Ant6	6985	174.72	6898.60	7073.32	PASS
11BE20MIMO	Ant3	5955	22.48	5943.84	5966.32	PASS
	Ant6	5955	23.20	5943.48	5966.68	PASS
	Ant3	6115	22.68	6103.72	6126.40	PASS
	Ant6	6115	23.44	6103.32	6126.76	PASS
	Ant3	6275	22.28	6263.96	6286.24	PASS
	Ant6	6275	23.08	6263.36	6286.44	PASS
	Ant3	6415	22.76	6403.76	6426.52	PASS
	Ant6	6415	23.40	6403.44	6426.84	PASS
	Ant3	6435	22.76	6423.80	6446.56	PASS
	Ant6	6435	23.52	6423.48	6447.00	PASS
	Ant3	6475	22.60	6463.84	6486.44	PASS
	Ant6	6475	24.12	6463.56	6487.68	PASS
	Ant3	6515	23.08	6503.24	6526.32	PASS
	Ant6	6515	23.24	6503.40	6526.64	PASS
	Ant3	6535	22.72	6523.48	6546.20	PASS
	Ant6	6535	23.28	6523.32	6546.60	PASS
	Ant3	6715	22.64	6703.72	6726.36	PASS
	Ant6	6715	23.40	6703.40	6726.80	PASS
	Ant3	6875	23.20	6863.32	6886.52	PASS
	Ant6	6875	24.12	6862.36	6886.48	PASS
	Ant3	6895	22.88	6883.60	6906.48	PASS
	Ant6	6895	23.00	6883.32	6906.32	PASS
	Ant3	7015	22.76	7003.72	7026.48	PASS
	Ant6	7015	23.28	7003.36	7026.64	PASS
	Ant3	7095	22.76	7083.72	7106.48	PASS
	Ant6	7095	22.96	7083.52	7106.48	PASS

	Ant3	7115	22.52	7103.76	7126.28	PASS
	Ant6	7115	23.36	7103.48	7126.84	PASS
11BE40MIMO	Ant3	5965	44.32	5943.00	5987.32	PASS
	Ant6	5965	44.16	5942.84	5987.00	PASS
	Ant3	6125	44.40	6102.76	6147.16	PASS
	Ant6	6125	44.08	6103.08	6147.16	PASS
	Ant3	6285	44.64	6262.52	6307.16	PASS
	Ant6	6285	44.24	6262.84	6307.08	PASS
	Ant3	6405	45.04	6382.60	6427.64	PASS
	Ant6	6405	43.92	6383.08	6427.00	PASS
	Ant3	6445	44.64	6423.08	6467.72	PASS
	Ant6	6445	43.84	6423.32	6467.16	PASS
	Ant3	6485	44.48	6462.84	6507.32	PASS
	Ant6	6485	45.12	6462.44	6507.56	PASS
	Ant3	6525	46.80	6500.12	6546.92	PASS
	Ant6	6525	44.56	6502.92	6547.48	PASS
	Ant3	6725	44.48	6703.00	6747.48	PASS
	Ant6	6725	44.48	6702.84	6747.32	PASS
	Ant3	6845	44.48	6822.28	6866.76	PASS
	Ant6	6845	44.16	6822.68	6866.84	PASS
	Ant3	6885	44.56	6862.52	6907.08	PASS
	Ant6	6885	44.00	6862.76	6906.76	PASS
	Ant3	7005	44.16	6983.08	7027.24	PASS
	Ant6	7005	43.84	6983.08	7026.92	PASS
	Ant3	7085	44.48	7062.60	7107.08	PASS
	Ant6	7085	43.84	7063.08	7106.92	PASS
11BE80MIMO	Ant3	5985	90.88	5938.44	6029.32	PASS
	Ant6	5985	92.00	5937.96	6029.96	PASS
	Ant3	6145	90.08	6099.72	6189.80	PASS
	Ant6	6145	91.20	6097.80	6189.00	PASS
	Ant3	6225	90.88	6177.96	6268.84	PASS
	Ant6	6225	90.40	6178.44	6268.84	PASS
	Ant3	6385	91.68	6339.56	6431.24	PASS
	Ant6	6385	91.68	6337.96	6429.64	PASS
	Ant3	6465	89.44	6420.20	6509.64	PASS
	Ant6	6465	90.24	6419.56	6509.80	PASS
	Ant3	6545	90.72	6498.92	6589.64	PASS
	Ant6	6545	91.68	6498.12	6589.80	PASS
	Ant3	6705	91.04	6657.96	6749.00	PASS
	Ant6	6705	91.68	6657.96	6749.64	PASS
	Ant3	6865	90.88	6817.80	6908.68	PASS
	Ant6	6865	91.20	6817.64	6908.84	PASS
	Ant3	6945	91.68	6897.32	6989.00	PASS
	Ant6	6945	91.04	6898.12	6989.16	PASS
	Ant3	7025	89.60	6981.64	7071.24	PASS
	Ant6	7025	95.36	6979.08	7074.44	PASS
11BE160MIMO	Ant3	6025	173.76	5939.56	6113.32	PASS
	Ant6	6025	172.80	5939.56	6112.36	PASS
	Ant3	6185	169.92	6099.88	6269.80	PASS
	Ant6	6185	171.20	6098.60	6269.80	PASS
	Ant3	6345	176.00	6257.96	6433.96	PASS
	Ant6	6345	171.84	6258.92	6430.76	PASS
	Ant3	6505	172.80	6419.56	6592.36	PASS
	Ant6	6505	168.32	6420.52	6588.84	PASS
	Ant3	6665	173.12	6578.28	6751.40	PASS
	Ant6	6665	172.48	6577.64	6750.12	PASS
	Ant3	6825	174.08	6737.32	6911.40	PASS
	Ant6	6825	171.52	6738.28	6909.80	PASS
	Ant3	6985	175.04	6899.24	7074.28	PASS
	Ant6	6985	174.40	6897.32	7071.72	PASS
11BE320MIMO	Ant3	6105	337.28	5936.04	6273.32	PASS

	Ant6	6105	337.92	5936.68	6274.60	PASS
	Ant3	6265	340.48	6093.48	6433.96	PASS
	Ant6	6265	341.12	6092.84	6433.96	PASS
	Ant3	6585	350.08	6414.12	6764.20	PASS
	Ant6	6585	336.64	6417.32	6753.96	PASS
	Ant3	6905	360.32	6725.16	7085.48	PASS
	Ant6	6905	339.84	6734.76	7074.60	PASS

11.1.2. Test Graphs

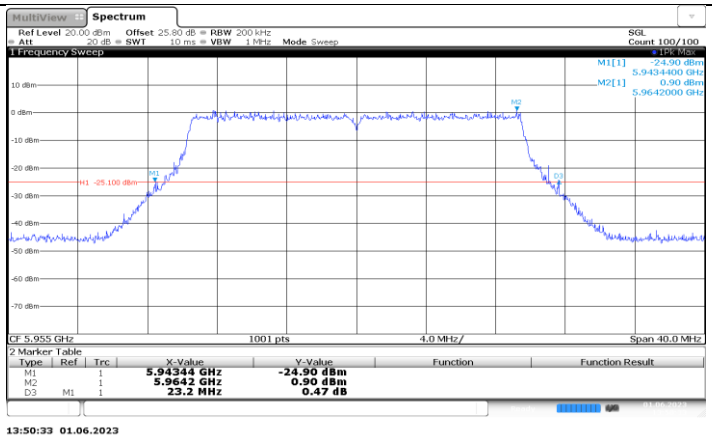

11AX20MIMO_Ant3_5955

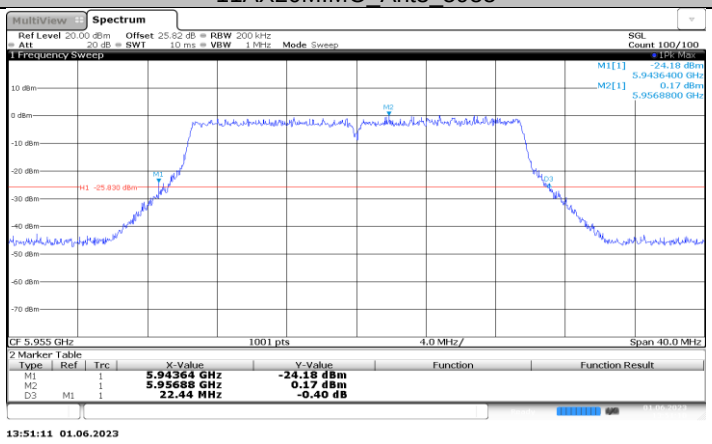

11AX20MIMO_Ant6_5955

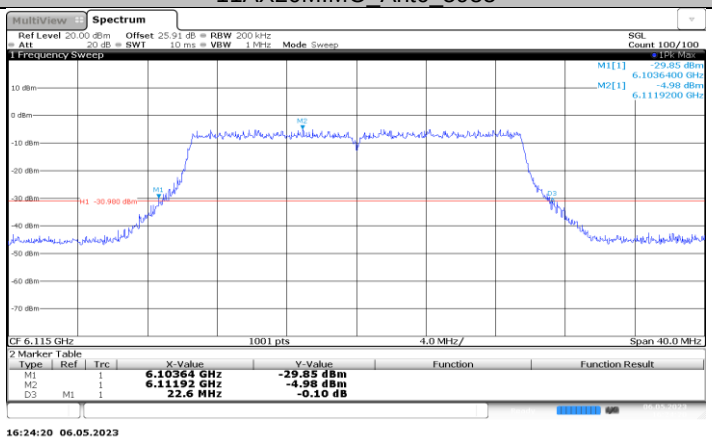

11AX20MIMO_Ant3_6115

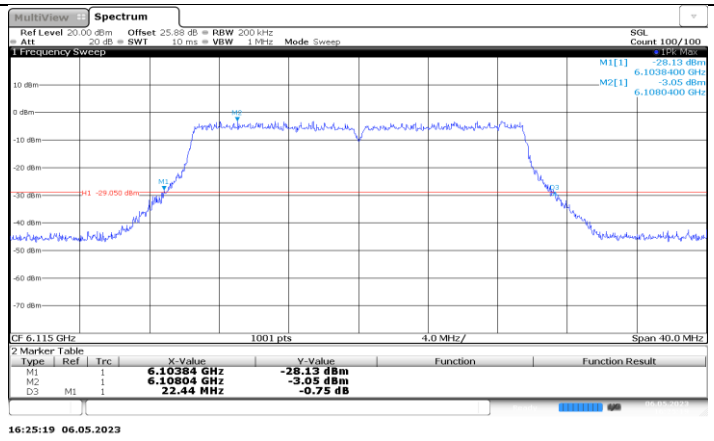

11AX20MIMO_Ant6_6115

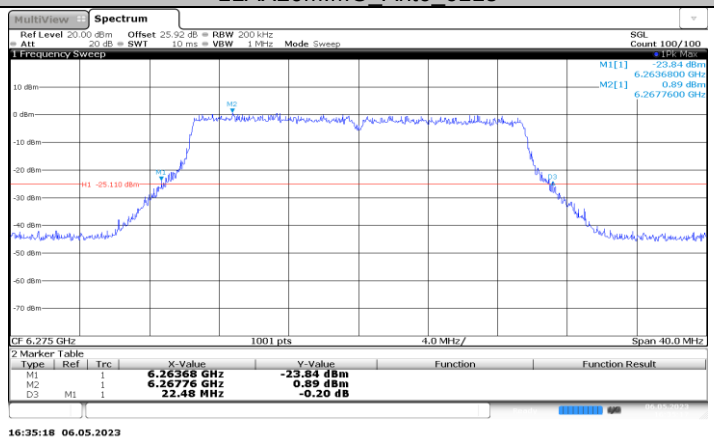

11AX20MIMO_Ant3_6275

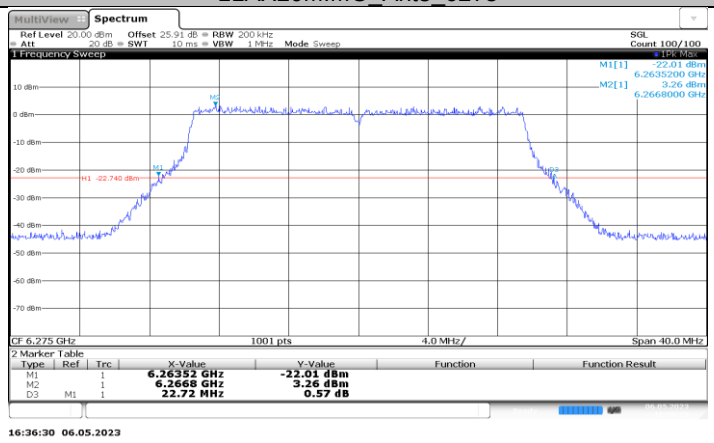

11AX20MIMO_Ant6_6275

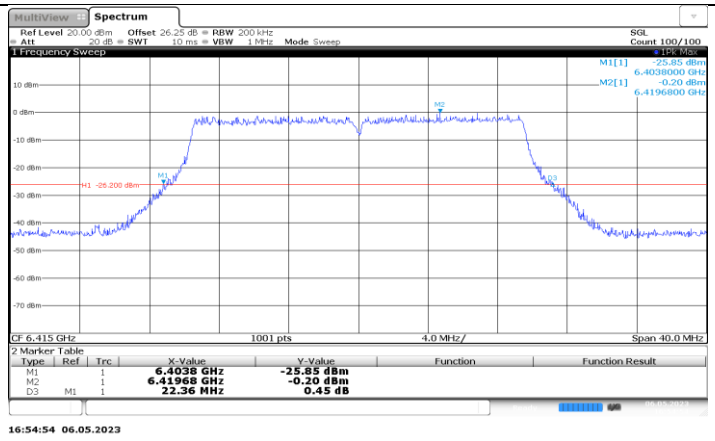

11AX20MIMO_Ant3_6415

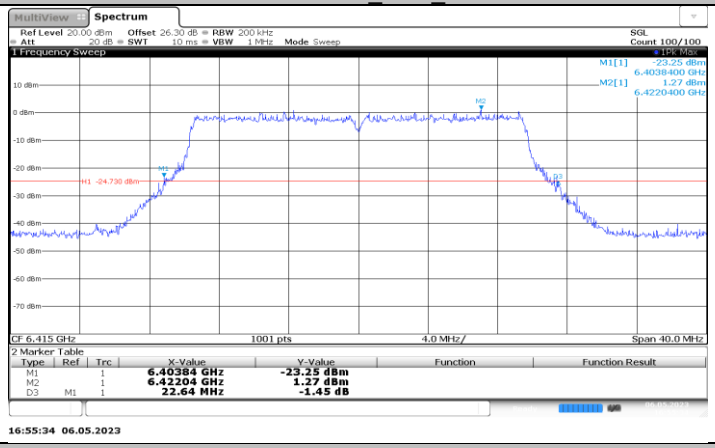

11AX20MIMO_Ant6_6415

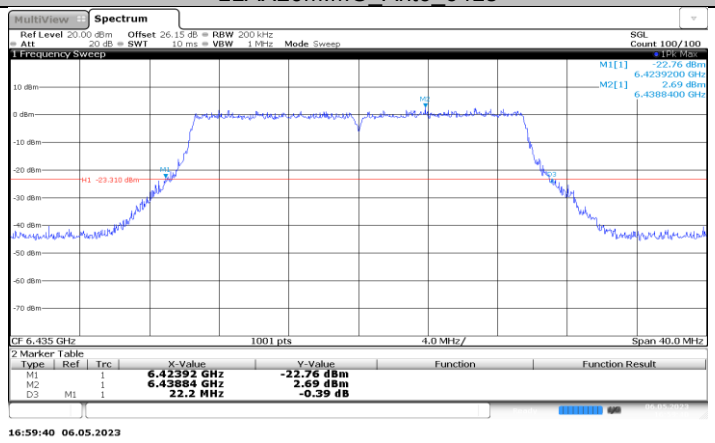

11AX20MIMO_Ant3_6435

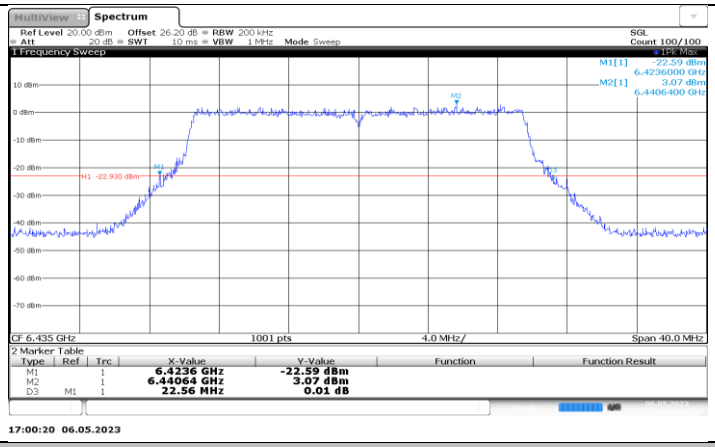

11AX20MIMO_Ant6_6435

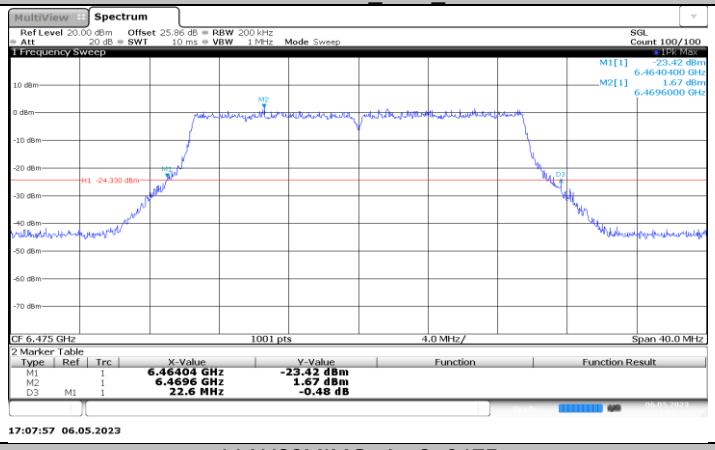

11AX20MIMO_Ant3_6475

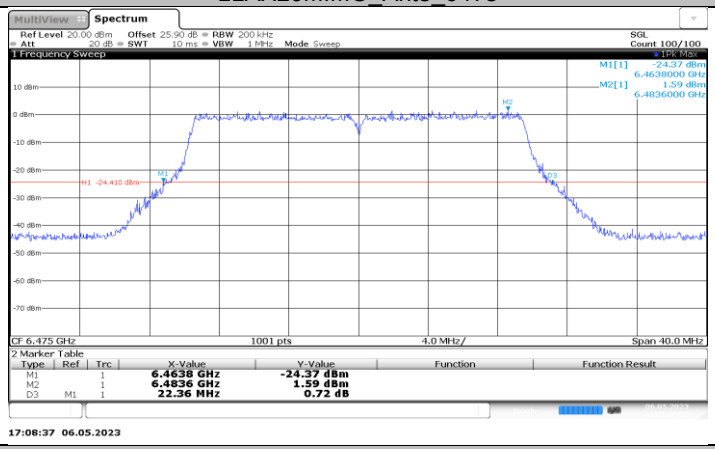

11AX20MIMO_Ant6_6475

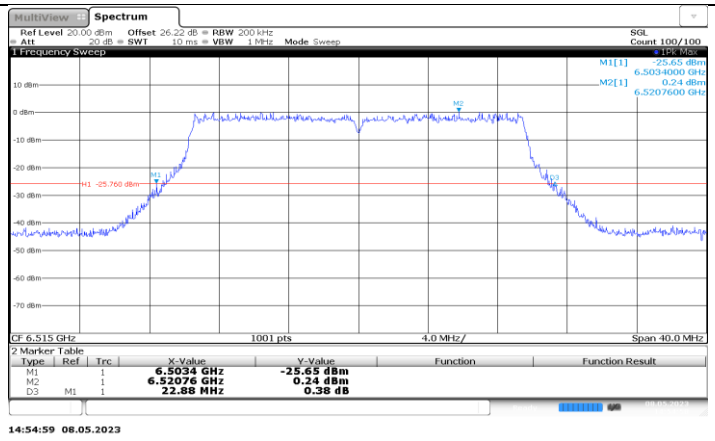

11AX20MIMO_Ant3_6515

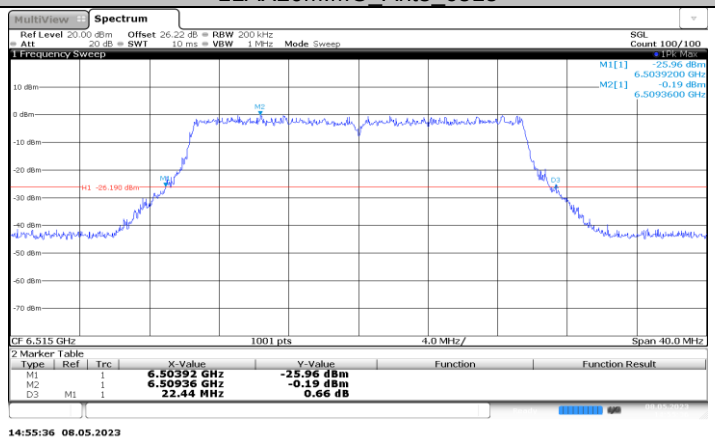

11AX20MIMO_Ant6_6515

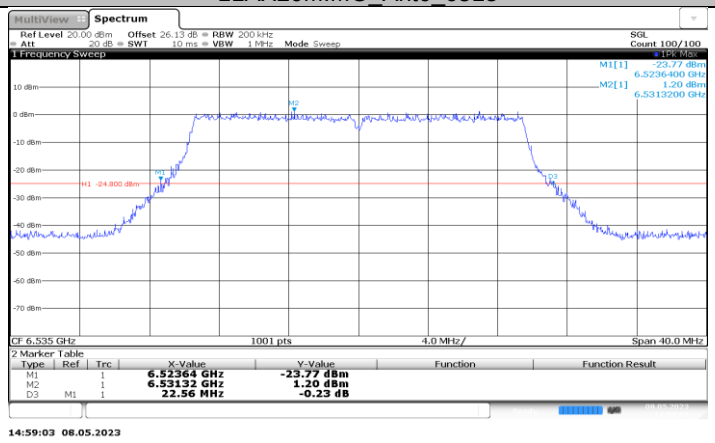

11AX20MIMO_Ant3_6535

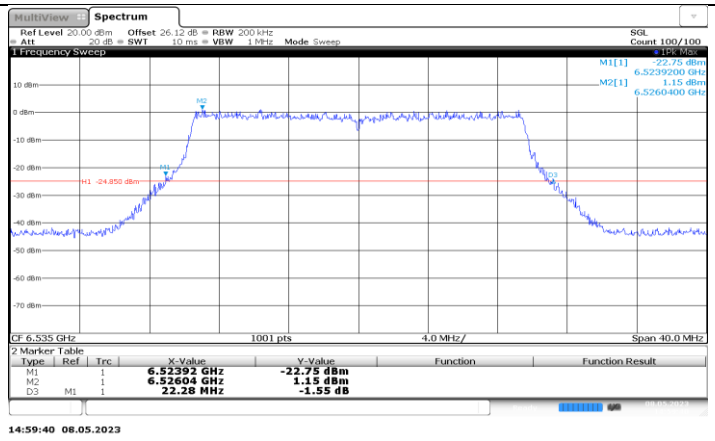

11AX20MIMO_Ant6_6535

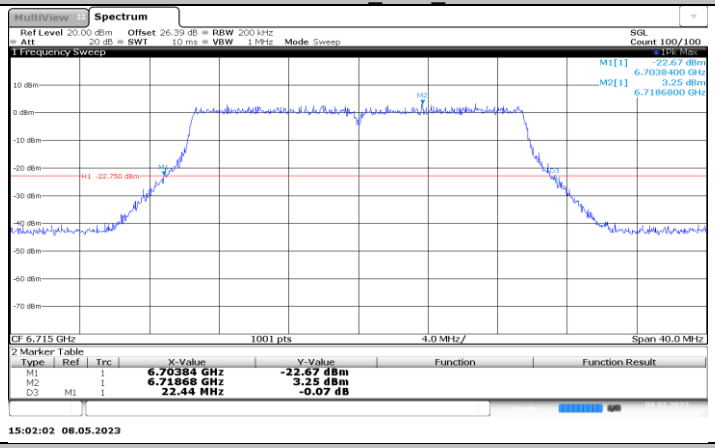

11AX20MIMO_Ant3_6715

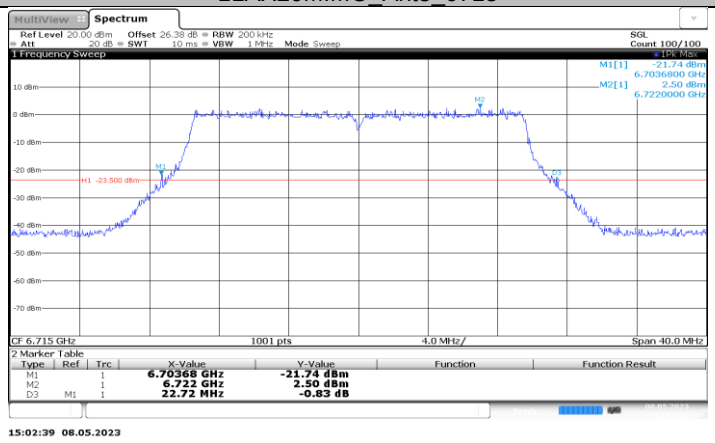

11AX20MIMO_Ant6_6715

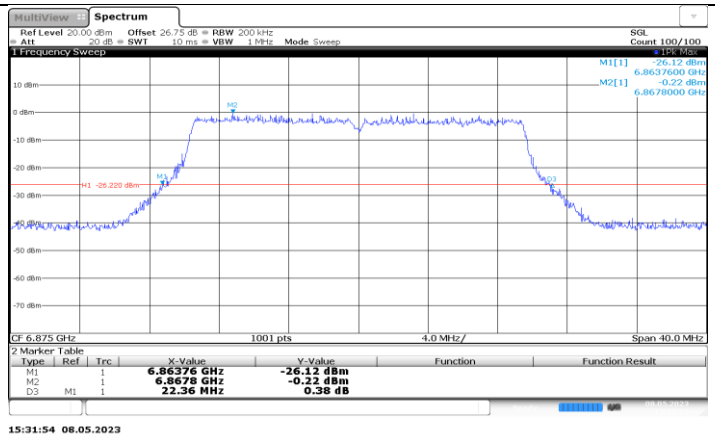

11AX20MIMO_Ant3_6875

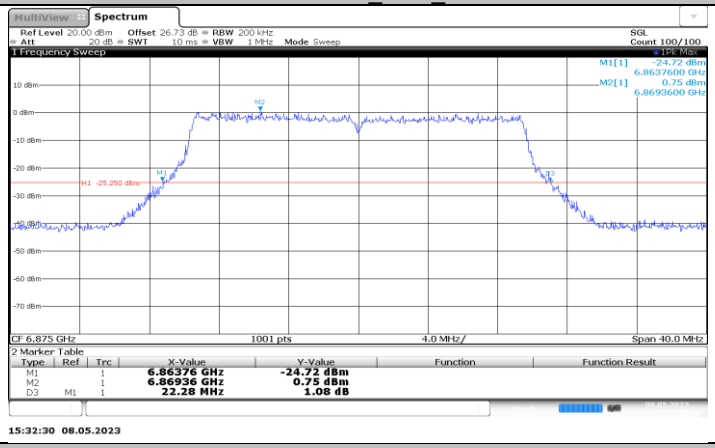

11AX20MIMO_Ant6_6875

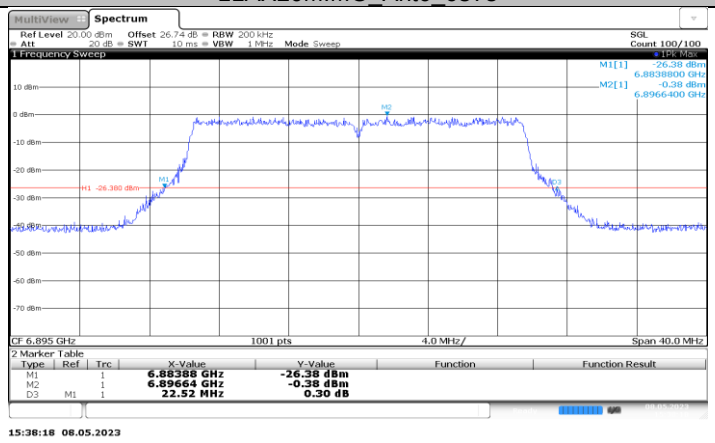

11AX20MIMO_Ant3_6895

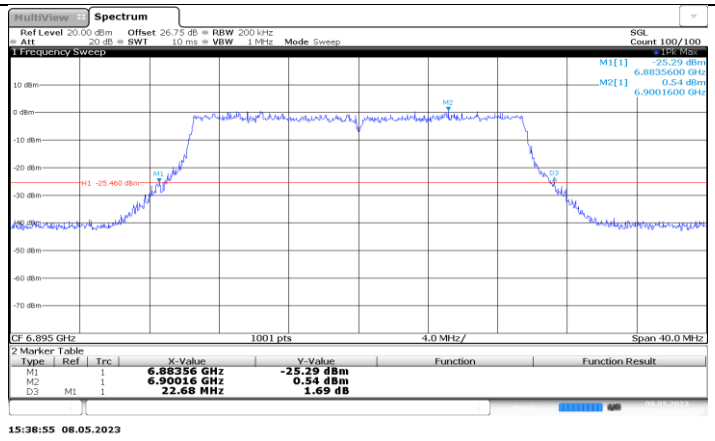

11AX20MIMO_Ant6_6895

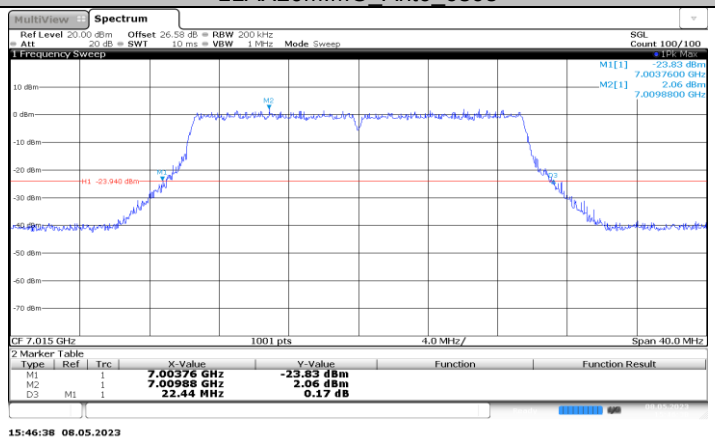

11AX20MIMO_Ant3_7015

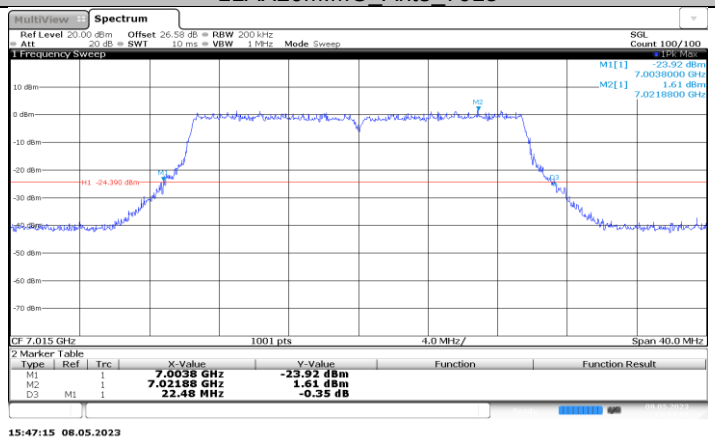

11AX20MIMO_Ant6_7015

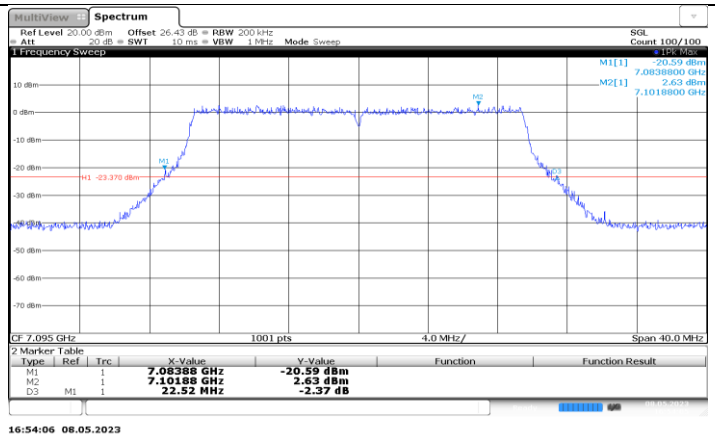

11AX20MIMO_Ant3_7095

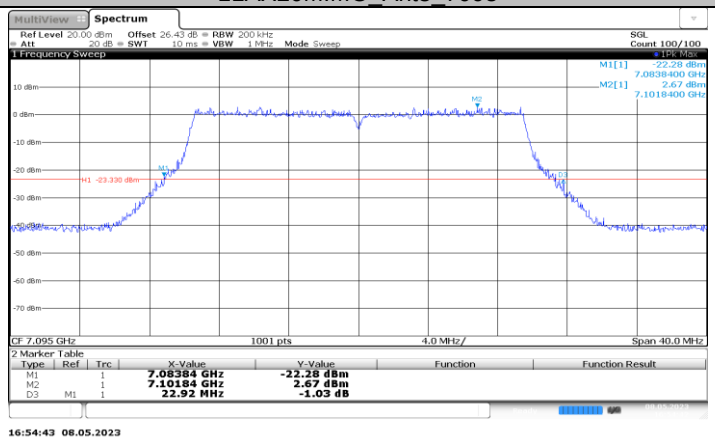

11AX20MIMO_Ant6_7095

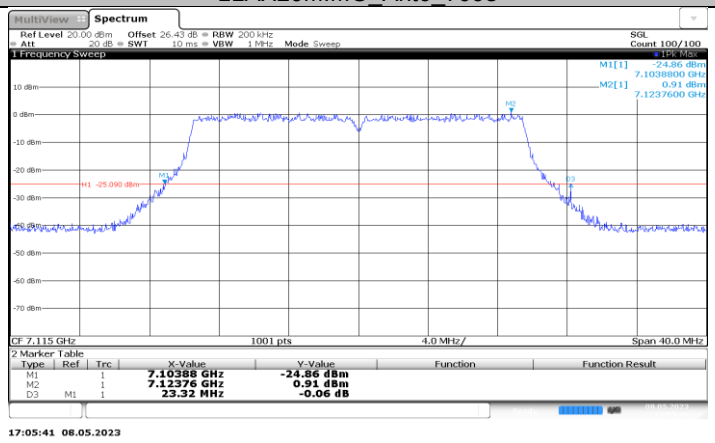

11AX20MIMO_Ant3_7115

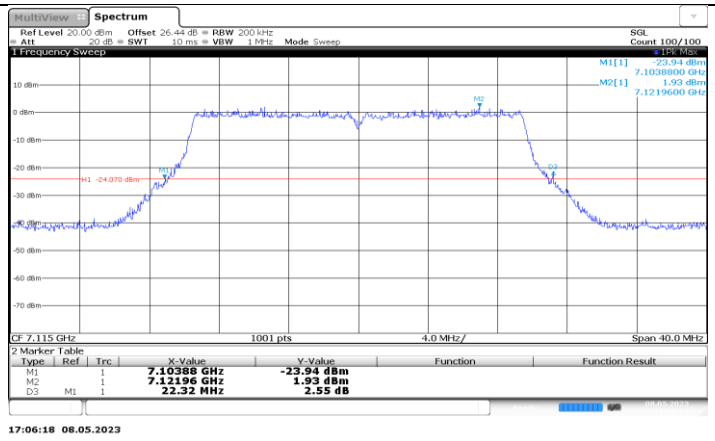

11AX20MIMO_Ant6_7115

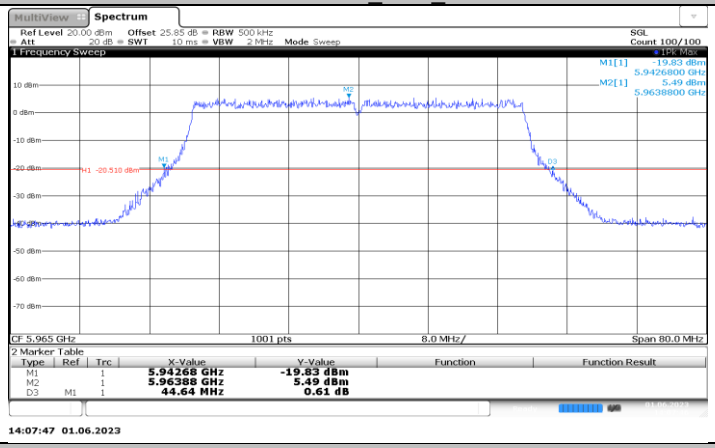

11AX40MIMO_Ant3_5965

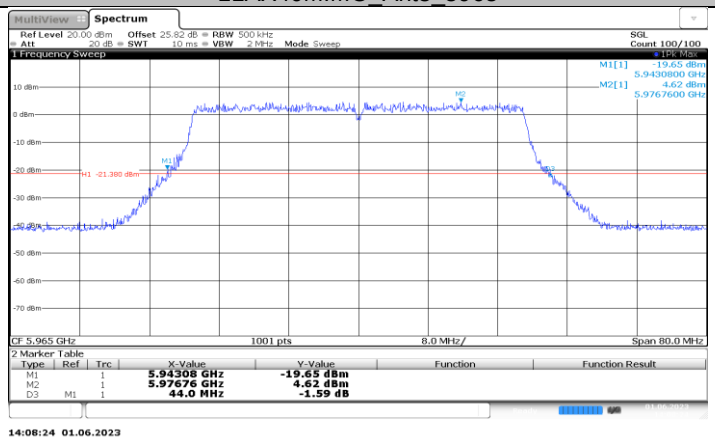

11AX40MIMO_Ant6_5965

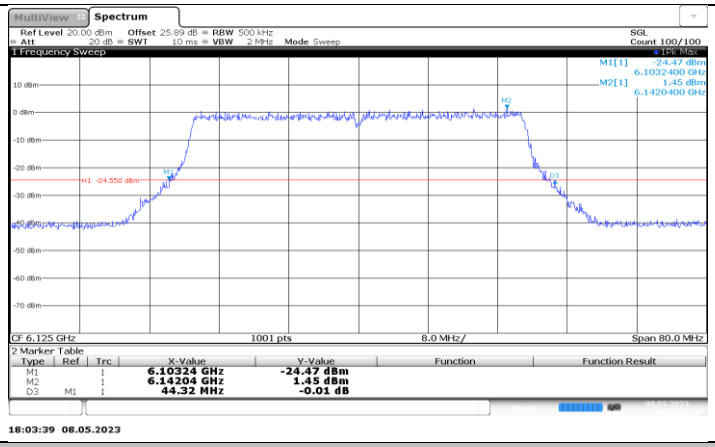

11AX40MIMO_Ant3_6125

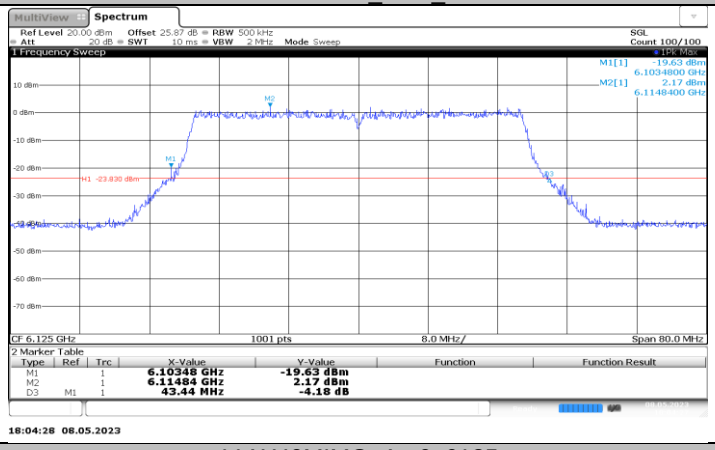

11AX40MIMO_Ant6_6125

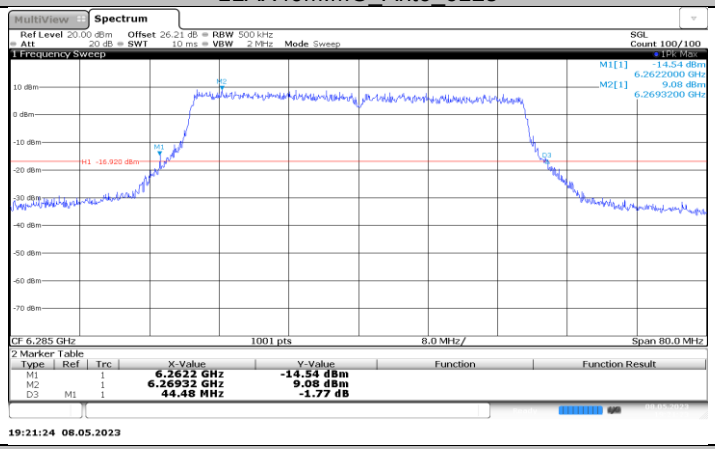

11AX40MIMO_Ant3_6285

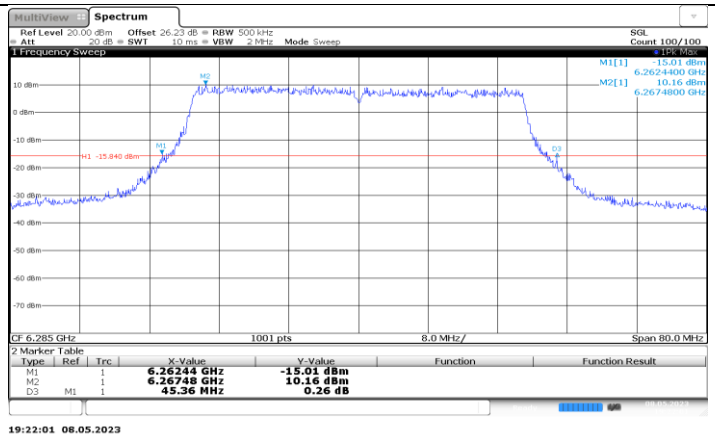

11AX40MIMO_Ant6_6285

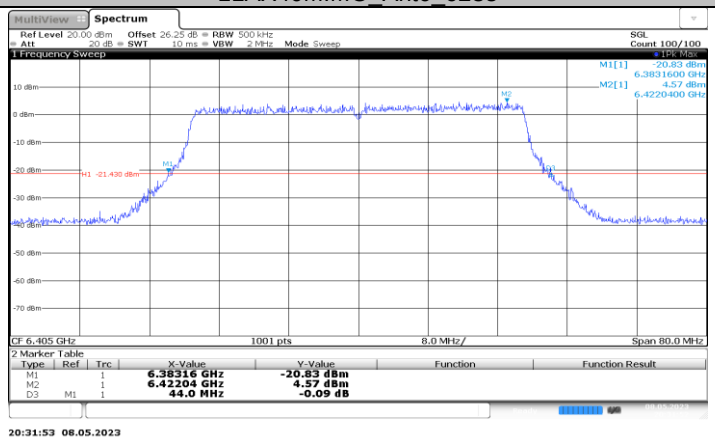

11AX40MIMO_Ant3_6405

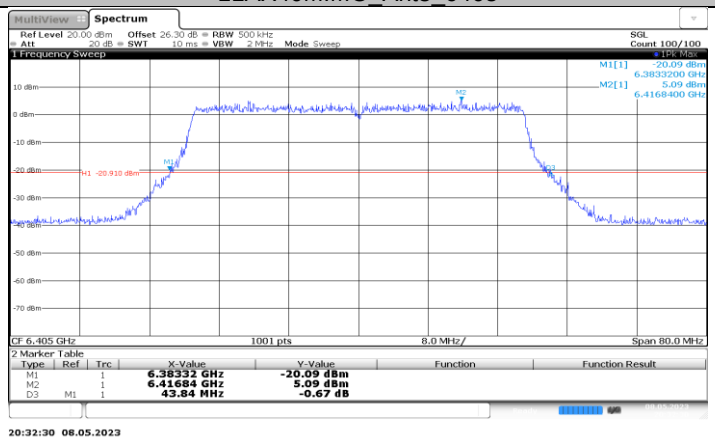

11AX40MIMO_Ant6_6405

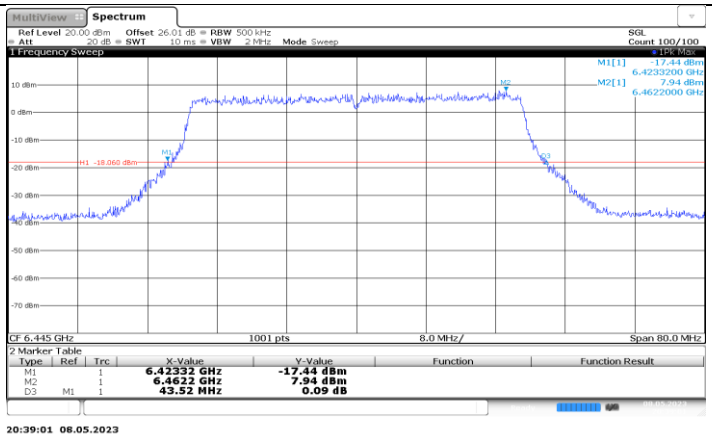

11AX40MIMO_Ant3_6445

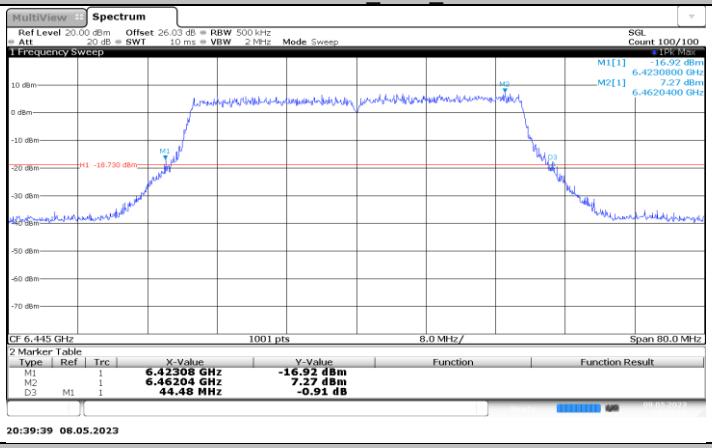

11AX40MIMO_Ant6_6445

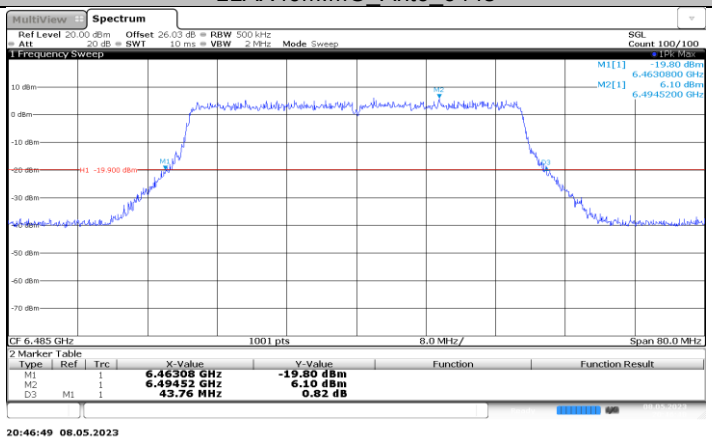

11AX40MIMO_Ant3_6485

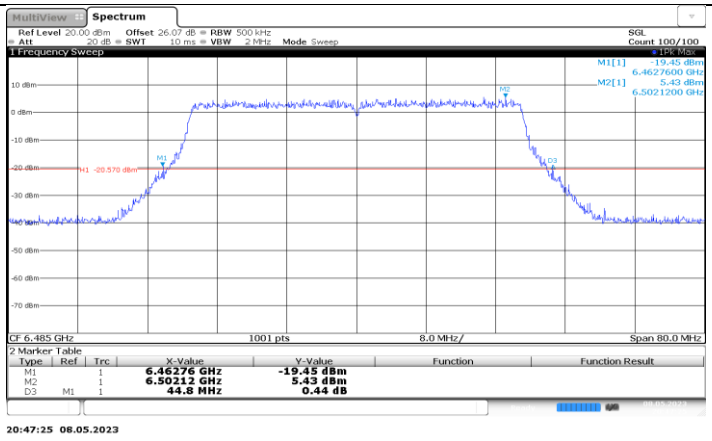

11AX40MIMO_Ant6_6485

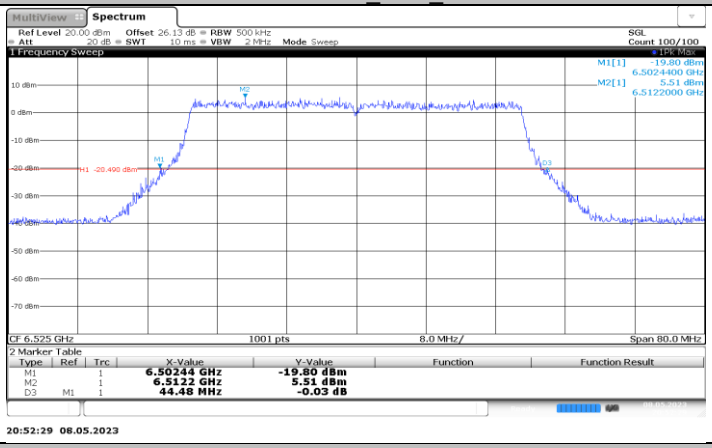

11AX40MIMO_Ant3_6525

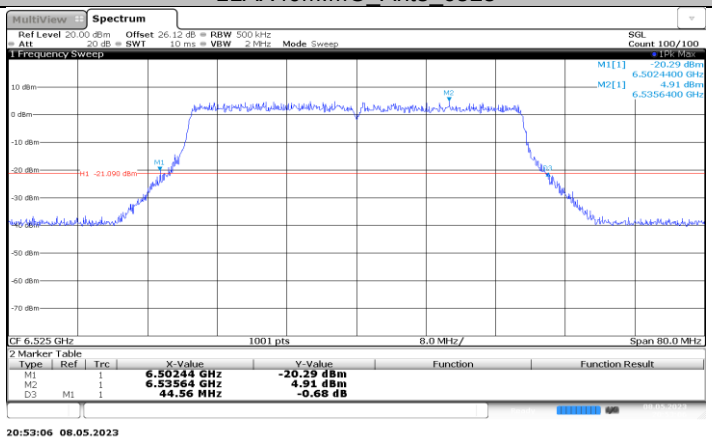

11AX40MIMO_Ant6_6525

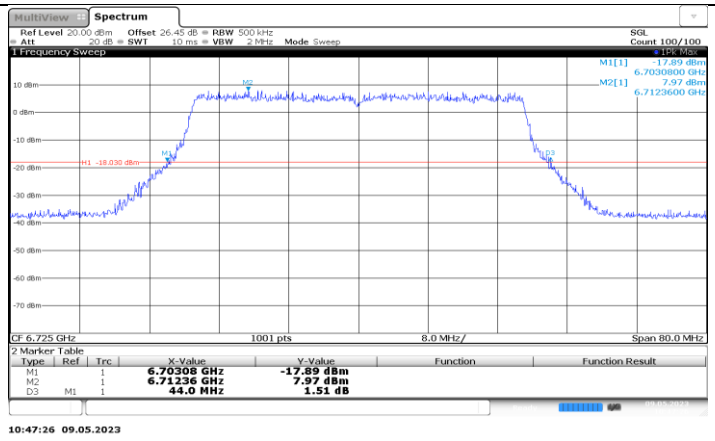

11AX40MIMO_Ant3_6725

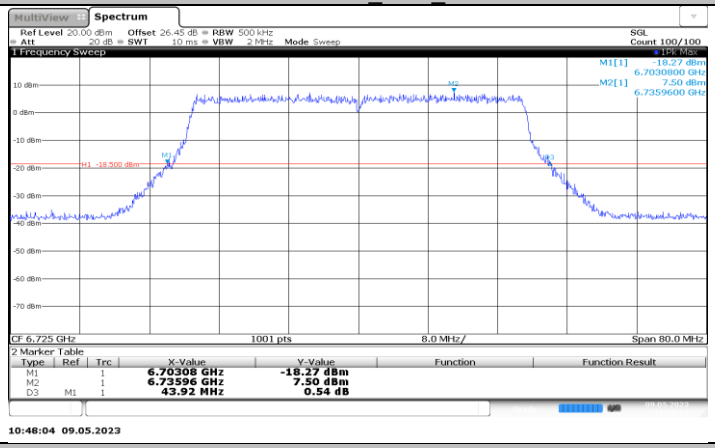

11AX40MIMO_Ant6_6725

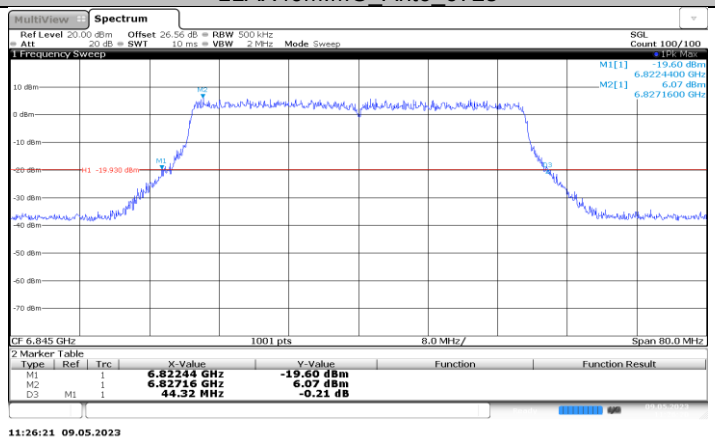

11AX40MIMO_Ant3_6845

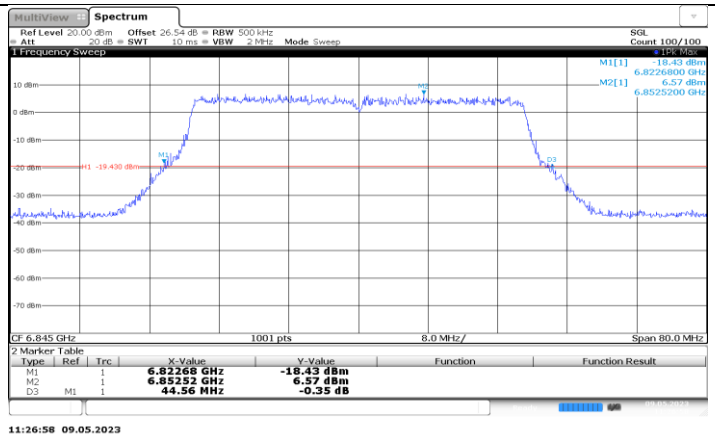

11AX40MIMO_Ant6_6845

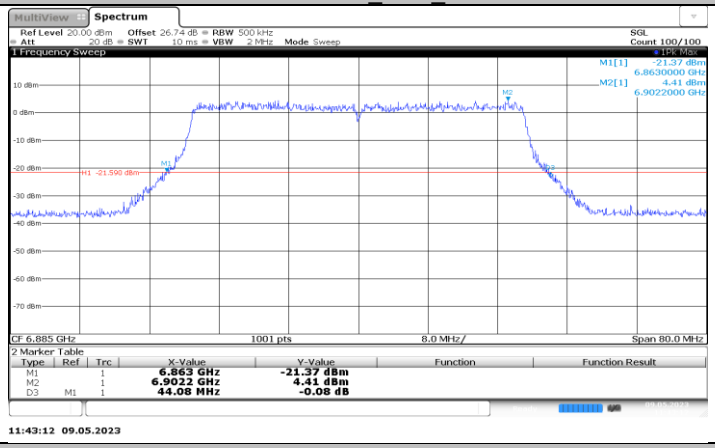

11AX40MIMO_Ant3_6885

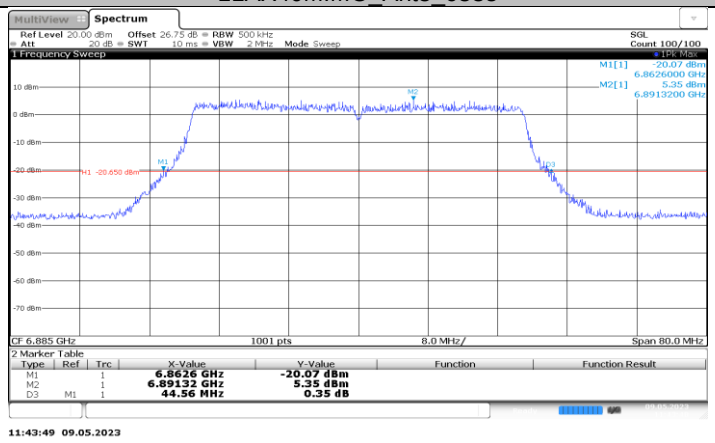

11AX40MIMO_Ant6_6885

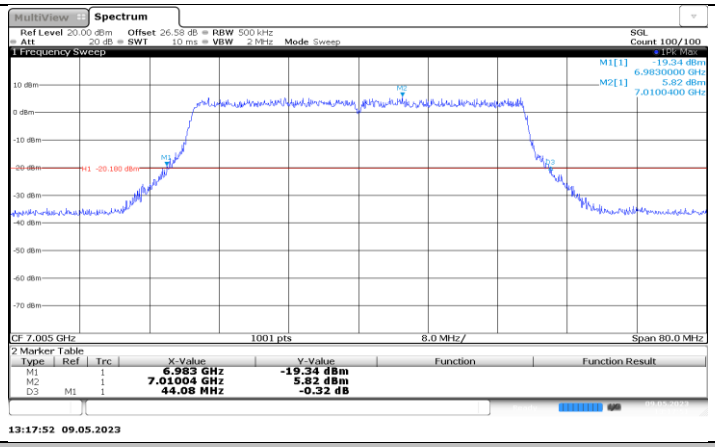

11AX40MIMO_Ant3_7005

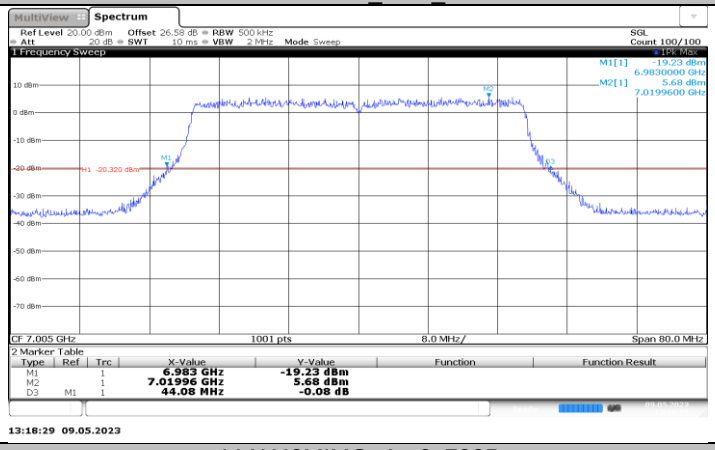

11AX40MIMO_Ant6_7005

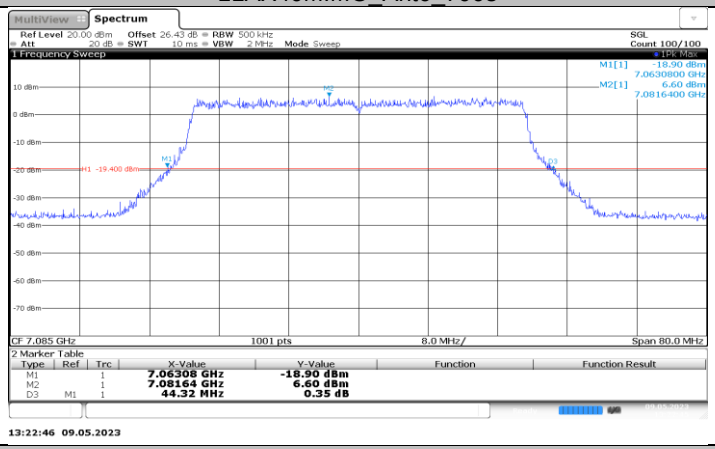

11AX40MIMO_Ant3_7085

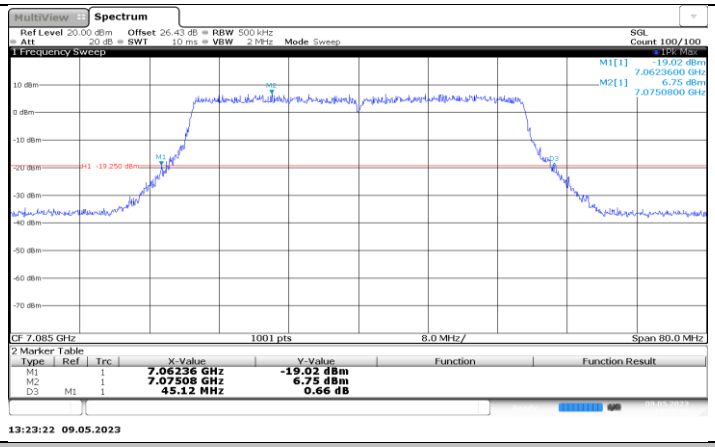

11AX40MIMO_Ant6_7085

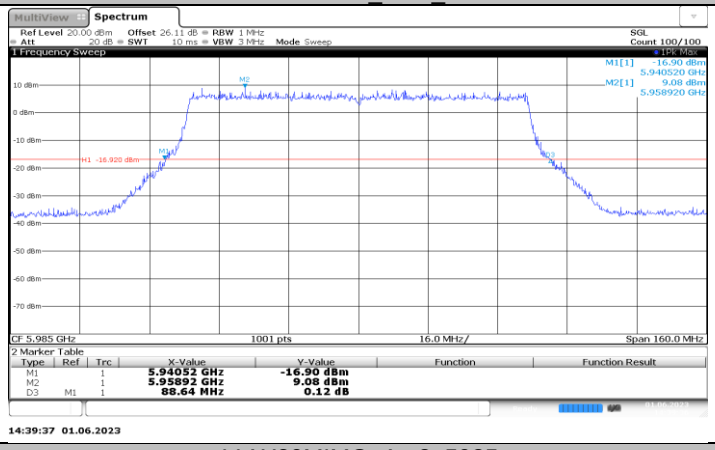

11AX80MIMO_Ant3_5985

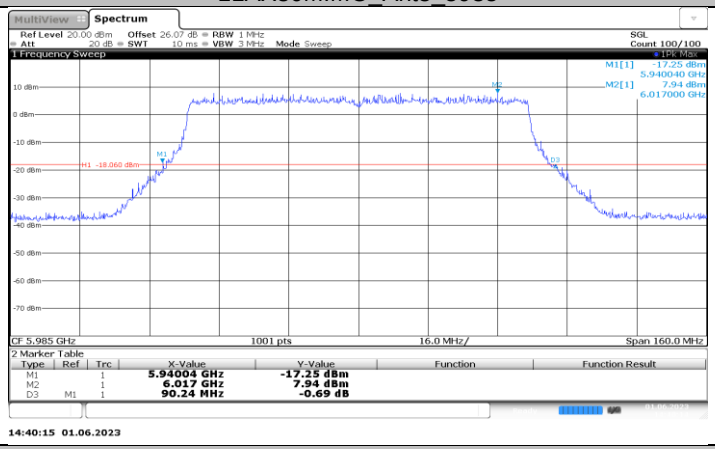

11AX80MIMO_Ant6_5985

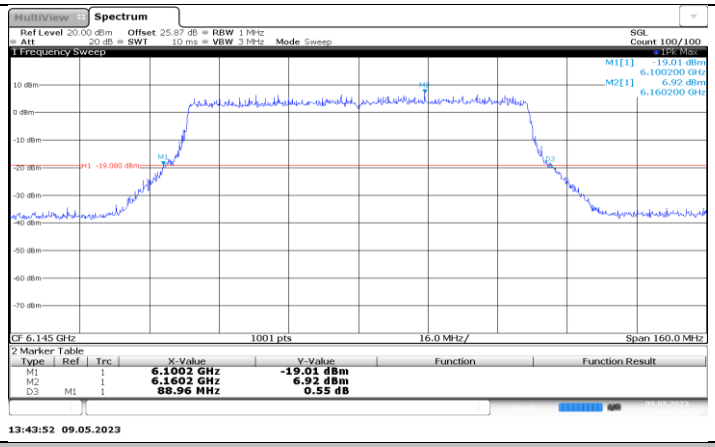

11AX80MIMO_Ant3_6145

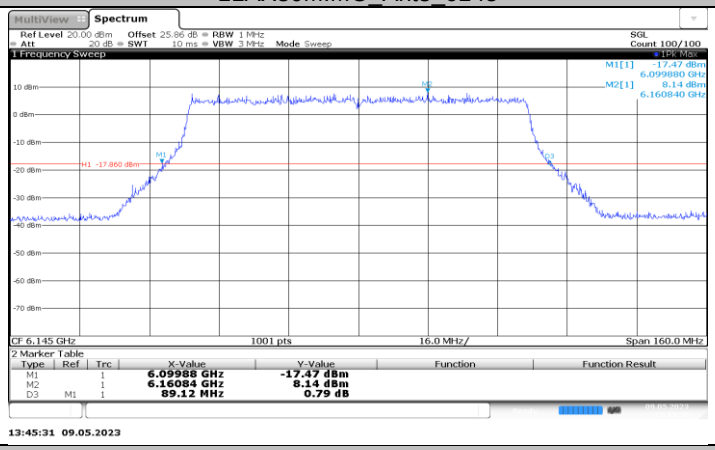

11AX80MIMO_Ant6_6145

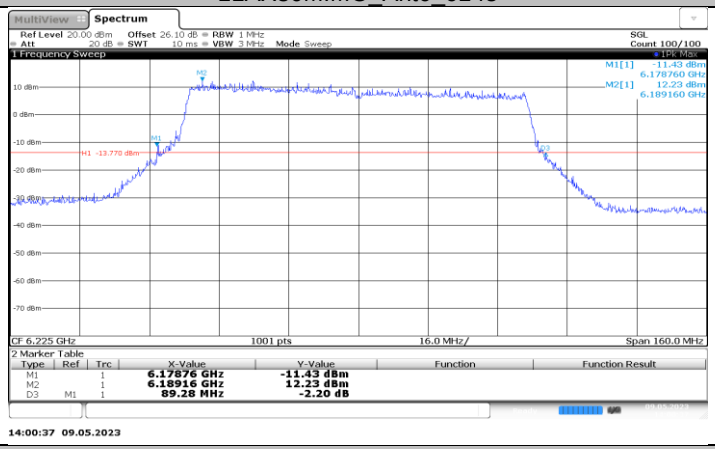

11AX80MIMO_Ant3_6225

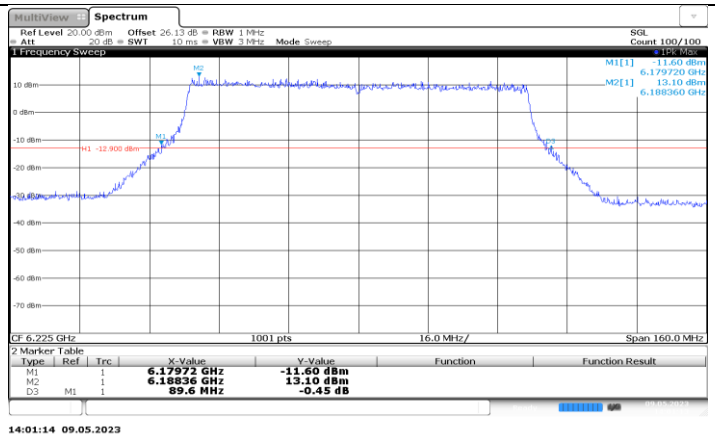

11AX80MIMO_Ant6_6225

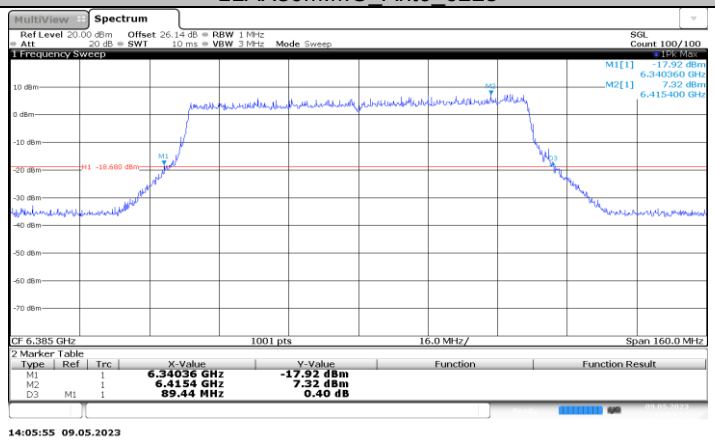

11AX80MIMO_Ant3_6385

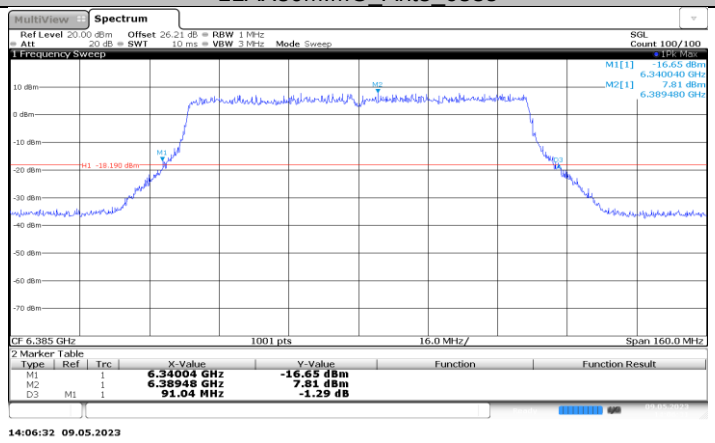

11AX80MIMO_Ant6_6385

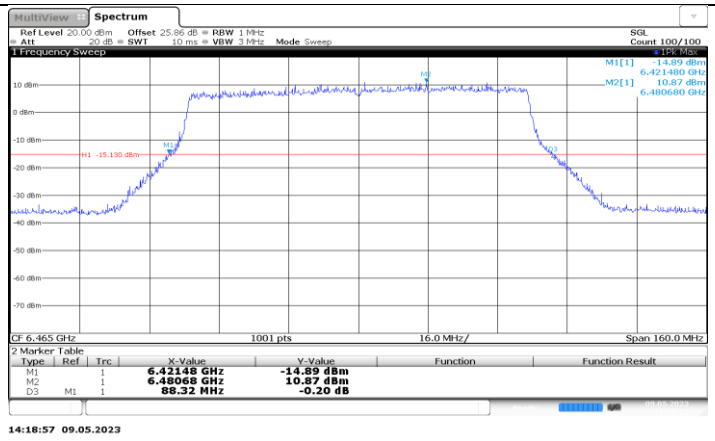

11AX80MIMO_Ant3_6465

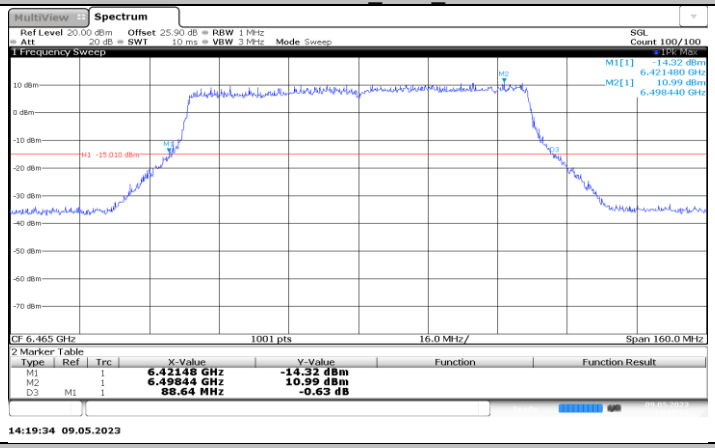

11AX80MIMO_Ant6_6465

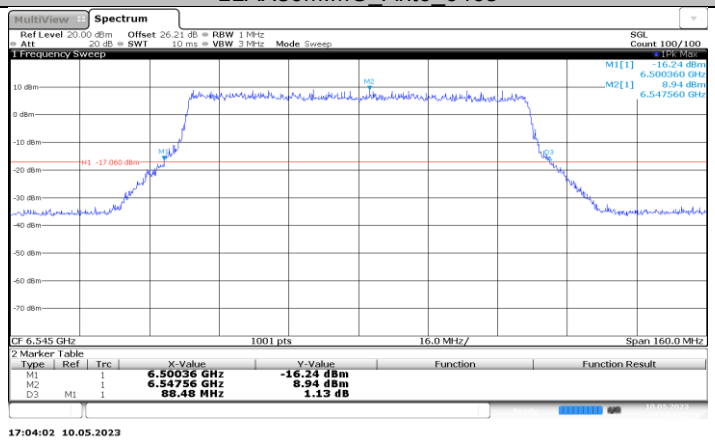

11AX80MIMO_Ant3_6545

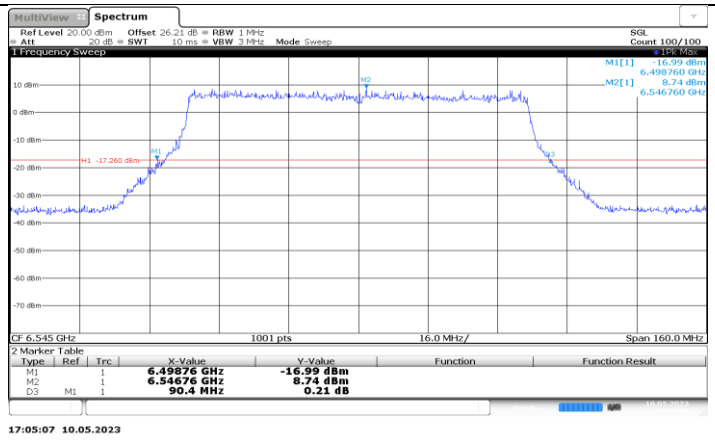

11AX80MIMO_Ant6_6545

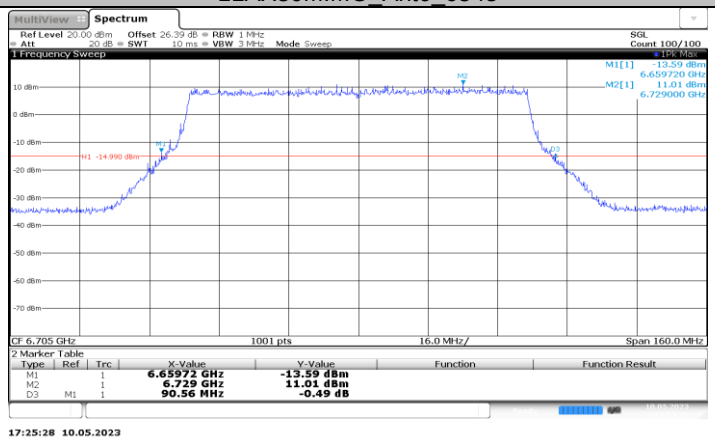

11AX80MIMO_Ant3_6705

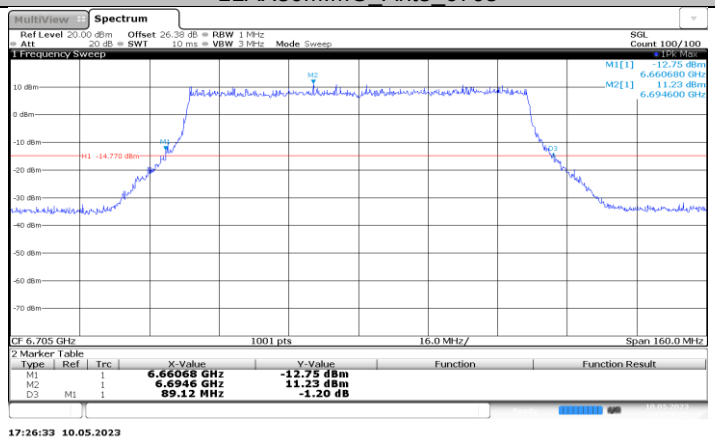

11AX80MIMO_Ant6_6705

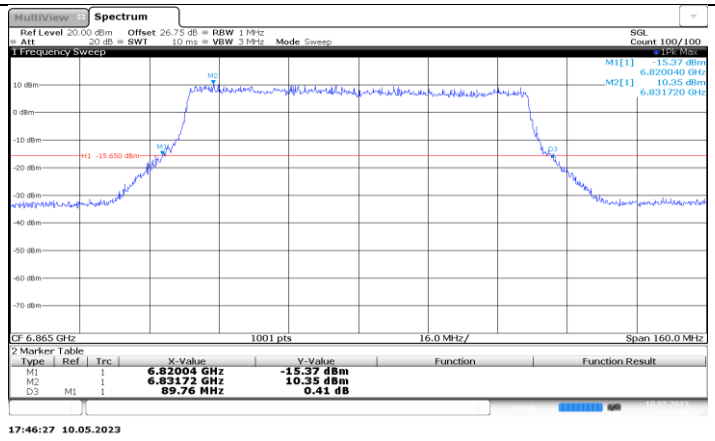

11AX80MIMO_Ant3_6865

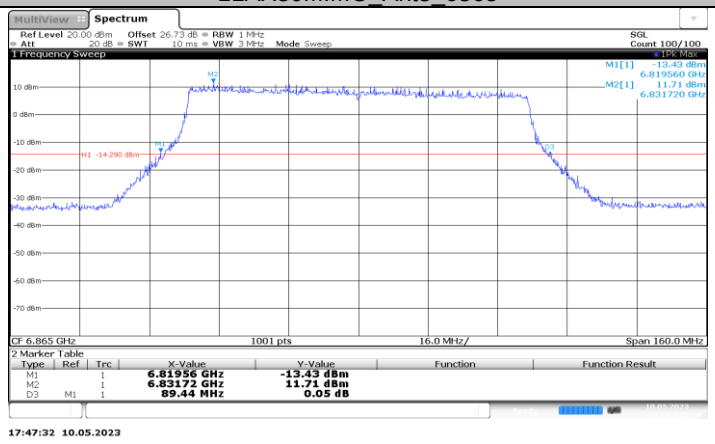

11AX80MIMO_Ant6_6865

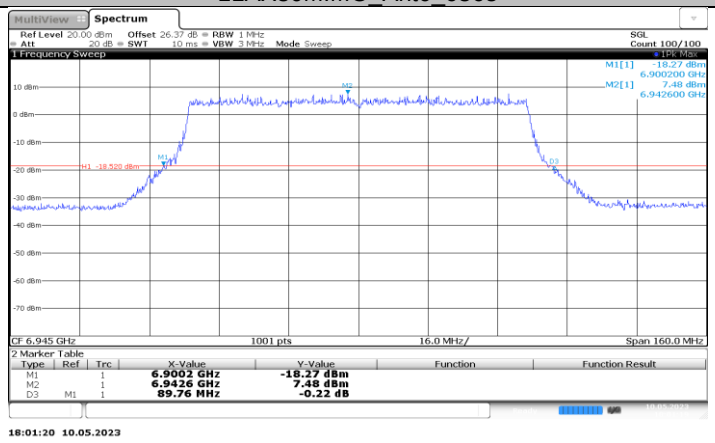

11AX80MIMO_Ant3_6945

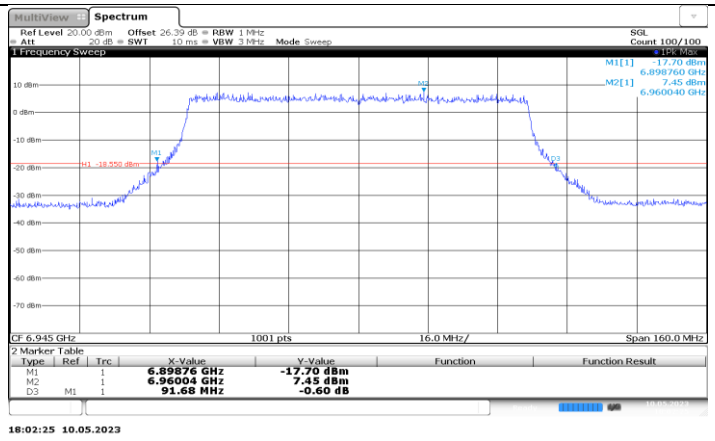

11AX80MIMO_Ant6_6945

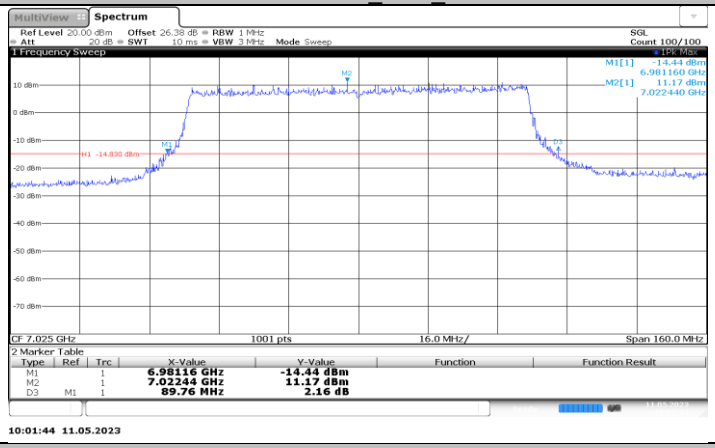

11AX80MIMO_Ant3_7025

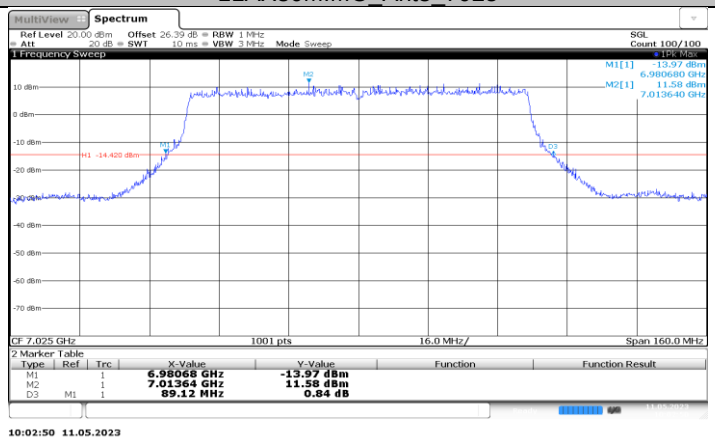

11AX80MIMO_Ant6_7025

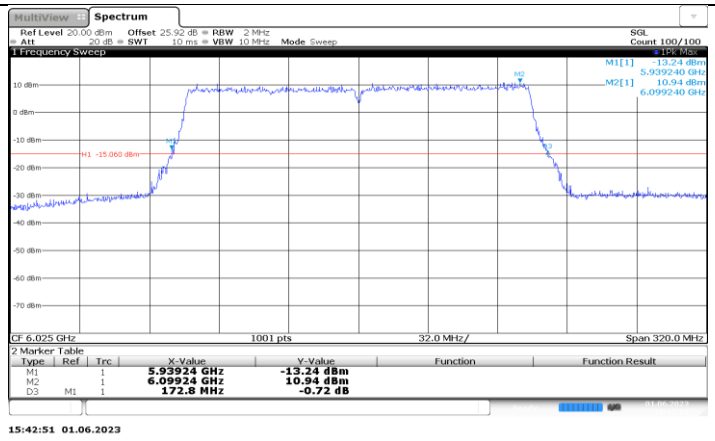

11AX160MIMO_Ant3_6025

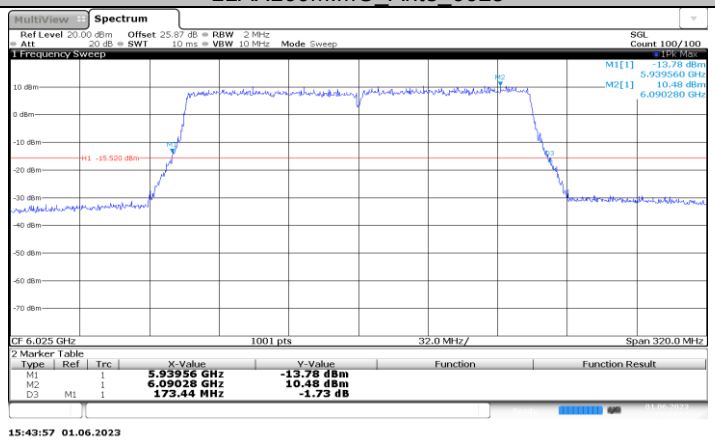

11AX160MIMO_Ant6_6025

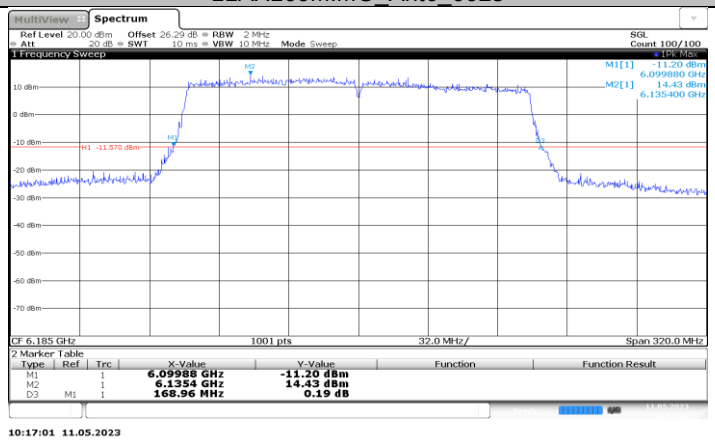

11AX160MIMO_Ant3_6185

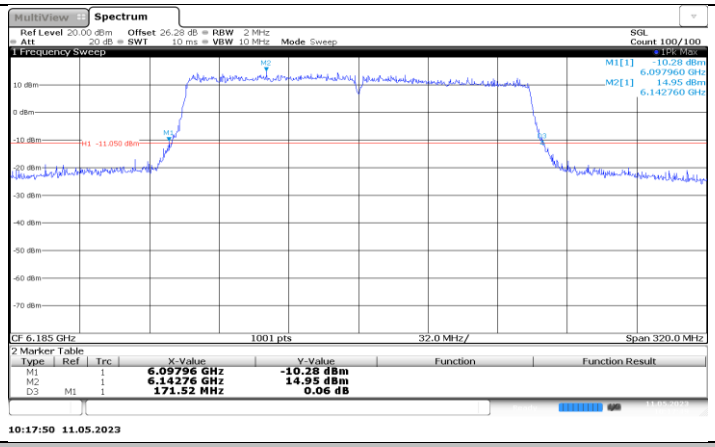

11AX160MIMO_Ant6_6185

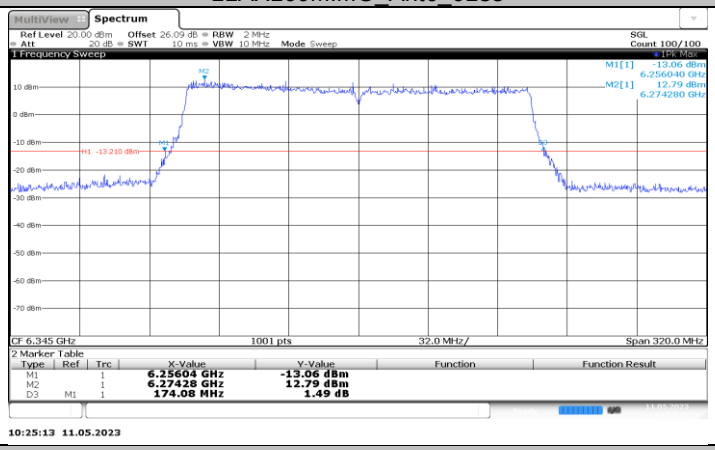

11AX160MIMO_Ant3_6345

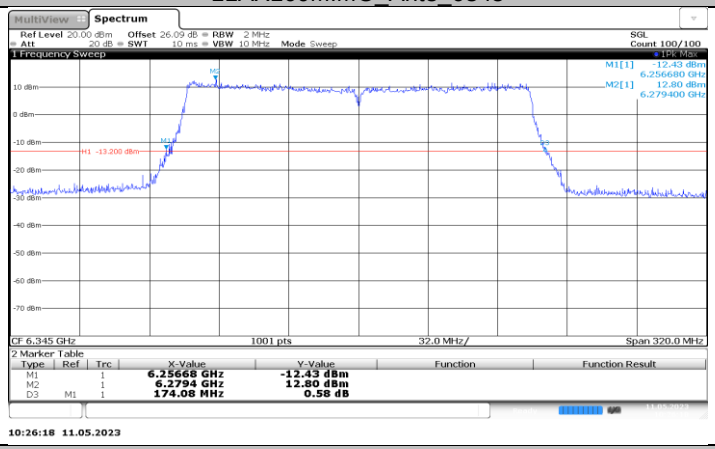

11AX160MIMO_Ant6_6345

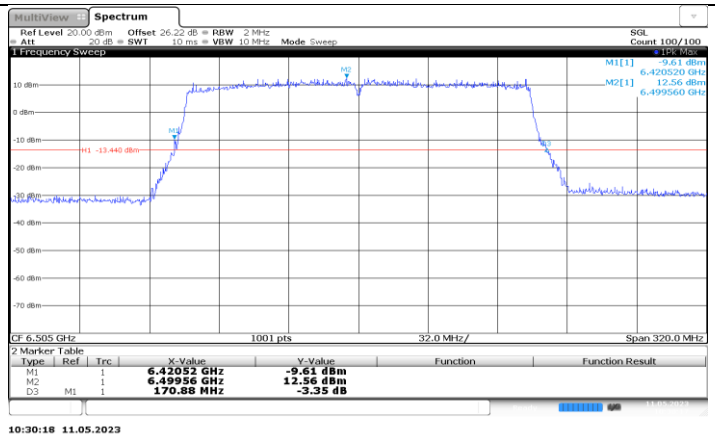

11AX160MIMO_Ant3_6505

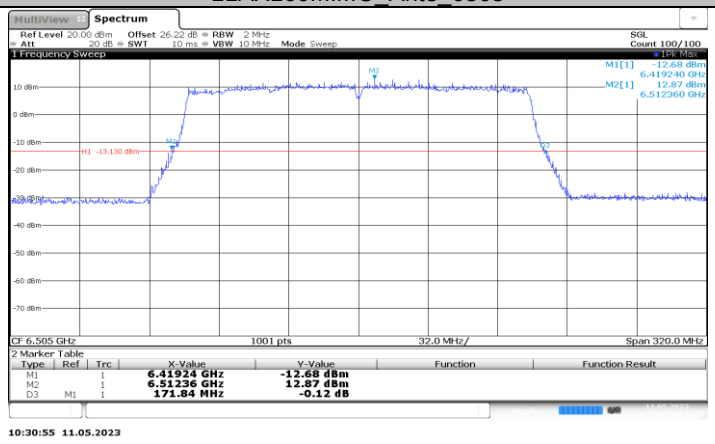

11AX160MIMO_Ant6_6505

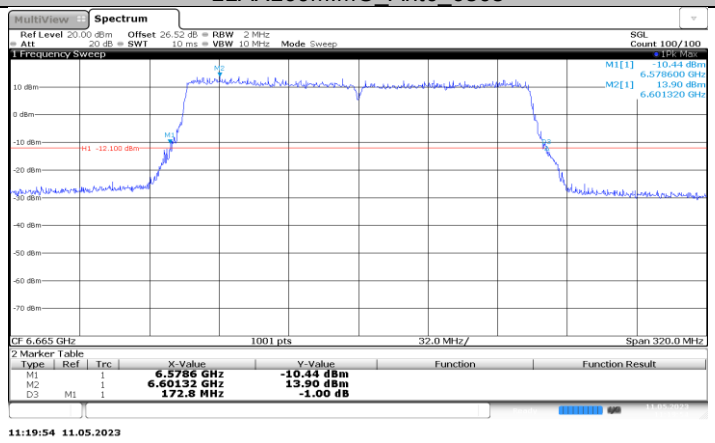

11AX160MIMO_Ant3_6665

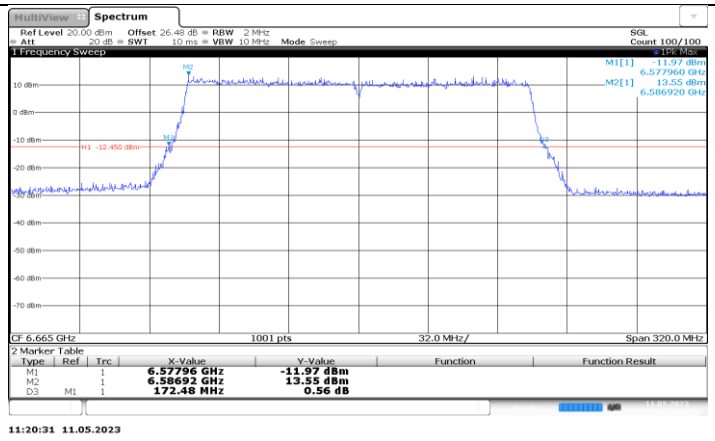

11AX160MIMO_Ant6_6665

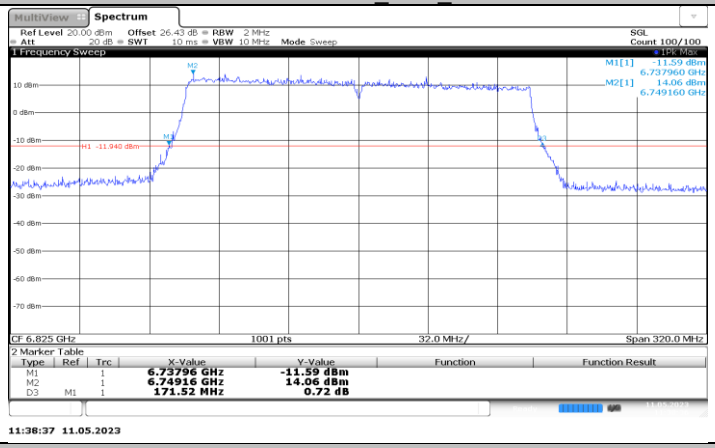

11AX160MIMO_Ant3_6825

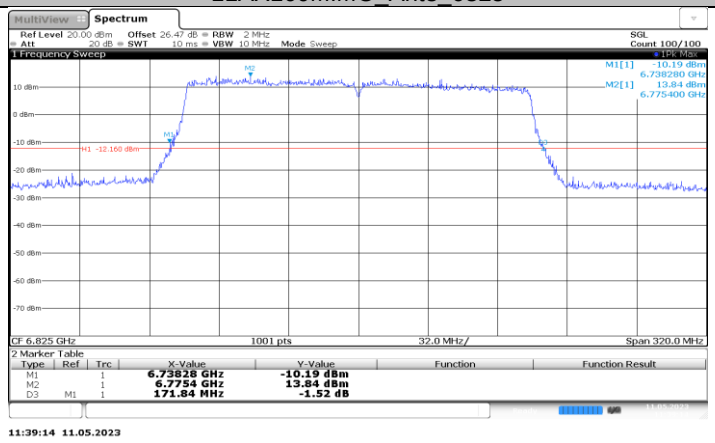

11AX160MIMO_Ant6_6825