

Antenna Specification

Product Model: Deco BE65(US)1.0

Version: 1.0

Manufacturer: _____

Date: _____

Checked By: _____



TP-Link Corporation Limited
Room 901, 9/F. , New East Ocean Centre,
9 Science Museum Road, Tsim Sha Tsui,
Kowloon, Hong Kong
TEL: 00852-37585503
<http://www.tp-link.com/en>

Index

I. Antenna Distribution.....	3
II. Electrical Characteristics	4
III. Antenna Peak Gain.....	5
IV. Antenna Radiation Pattern	6

I. Antenna Distribution

Deco BE65(US)1.0

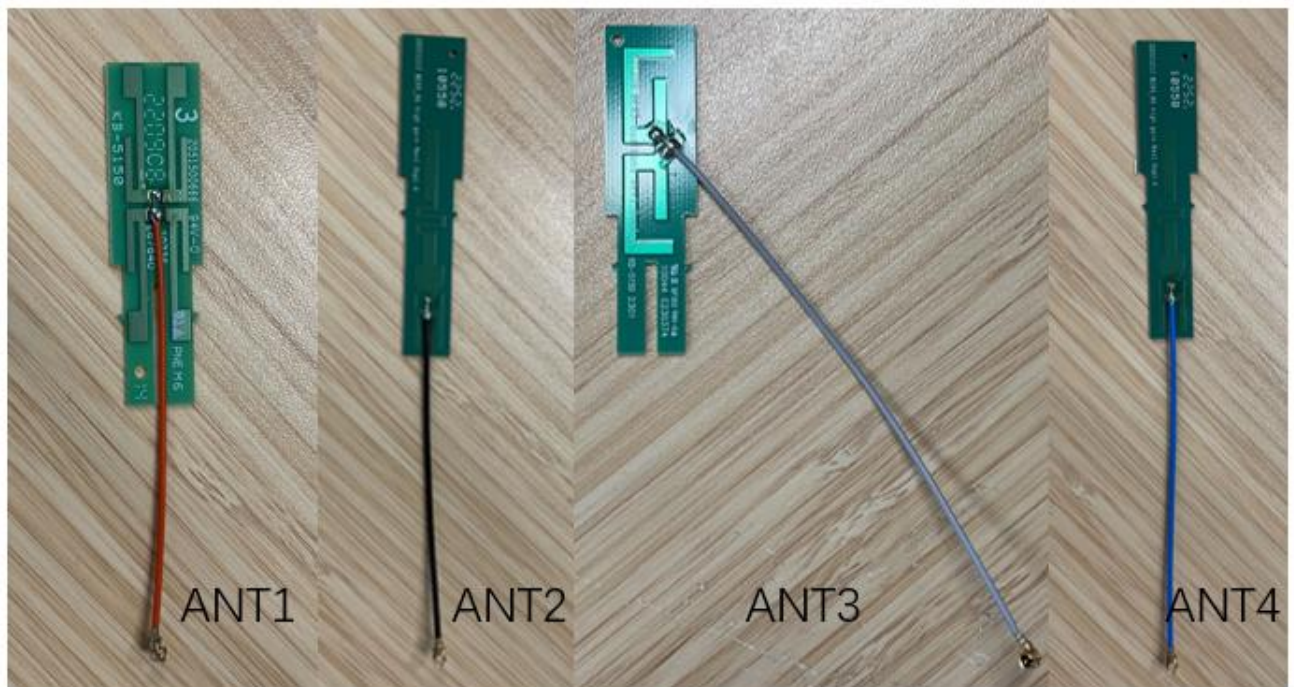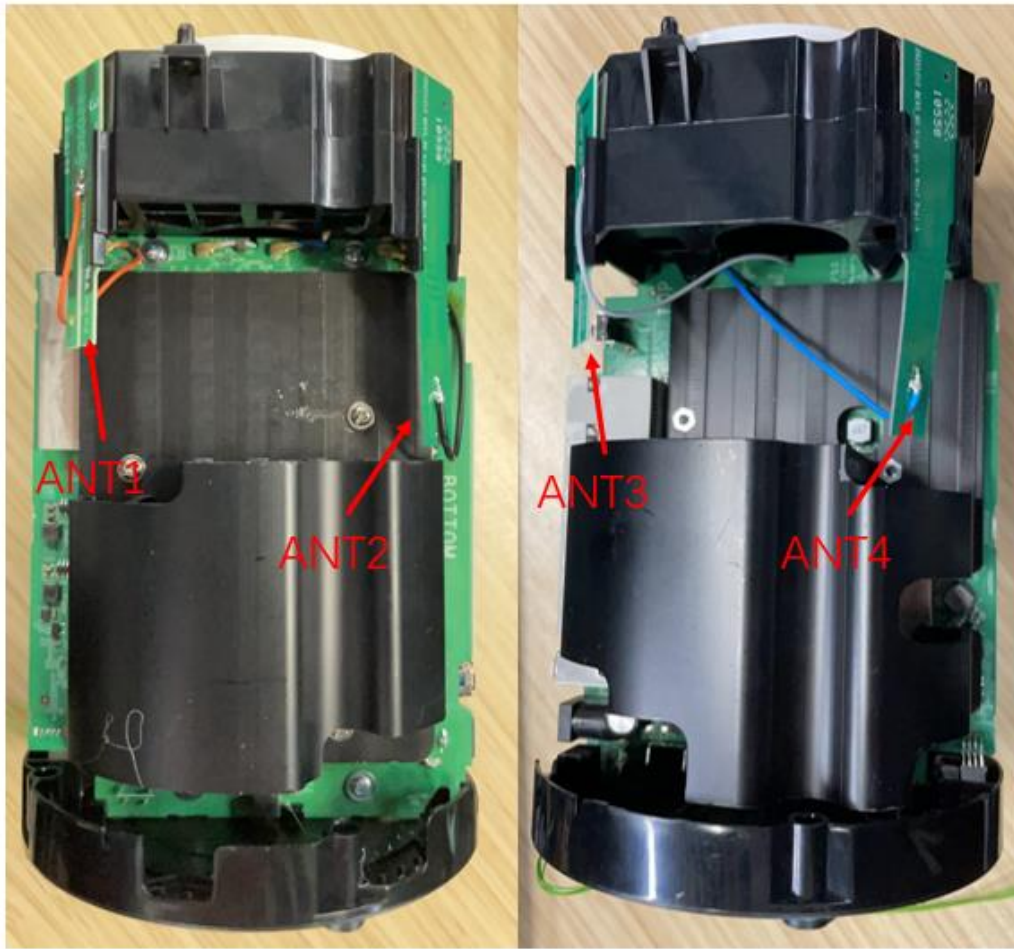

II. Electrical Characteristics

Ant1	
Frequency	2400 ~ 2500MHz & 5150 ~ 5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.99dBi@2400~2500MHz 2.96dBi@5150~5850MHz
Radiation pattern	Omni-Directional

Ant2	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.97dBi@5925~7125MHz
Radiation pattern	Omni-Directional

Ant3	
Frequency	2400 ~ 2500MHz & 5150 ~ 5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.97dBi@2400~2500MHz 2.98dBi@5150~5850MHz
Radiation pattern	Omni-Directional

Ant4	
Frequency	5925~7125MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.99dBi@5925~7125MHz
Radiation pattern	Omni-Directional

III. Antenna Peak Gain




Ant1											
Frequency(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain(dBi)	1.79	1.89	1.92	1.88	1.96	1.98	1.95	1.95	1.99	1.97	1.94
Frequency(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650
Gain(dBi)	2.96	2.89	2.88	2.85	2.95	2.94	2.83	2.88	2.85	2.89	2.87
Frequency(MHz)	5700	5750	5800	5850							
Gain(dBi)	2.87	2.93	2.89	2.88							

Ant2											
Frequency(MHz)	5925	5975	6025	6075	6125	6175	6225	6275	6325	6375	6425
Gain(dBi)	2.85	2.93	2.90	2.95	2.93	2.97	2.91	2.86	2.83	2.83	2.85
Frequency(MHz)	6475	6525	6575	6625	6675	6725	6775	6825	6875	6925	6975
Gain(dBi)	2.92	2.95	2.90	2.89	2.86	2.92	2.95	2.93	2.91	2.85	2.84
Frequency(MHz)	7025	7075	7125								
Gain(dBi)	2.90	2.87	2.85								

Ant3											
Frequency(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain(dBi)	1.94	1.89	1.96	1.97	1.95	1.85	1.87	1.91	1.88	1.95	1.87
Frequency(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650
Gain(dBi)	2.95	2.92	2.93	2.86	2.98	2.89	2.85	2.83	2.89	2.90	2.95
Frequency(MHz)	5700	5750	5800	5850							
Gain(dBi)	2.91	2.87	2.96	2.93							


Ant4											
Frequency(MHz)	5925	5975	6025	6075	6125	6175	6225	6275	6325	6375	6425
Gain(dBi)	2.87	2.90	2.92	2.96	2.93	2.92	2.95	2.90	2.91	2.85	2.88
Frequency(MHz)	6475	6525	6575	6625	6675	6725	6775	6825	6875	6925	6975
Gain(dBi)	2.92	2.85	2.90	2.99	2.86	2.91	2.91	2.93	2.88	2.95	2.94
Frequency(MHz)	7025	7075	7125								
Gain(dBi)	2.92	2.87	2.92								

IV. Antenna Radiation Pattern

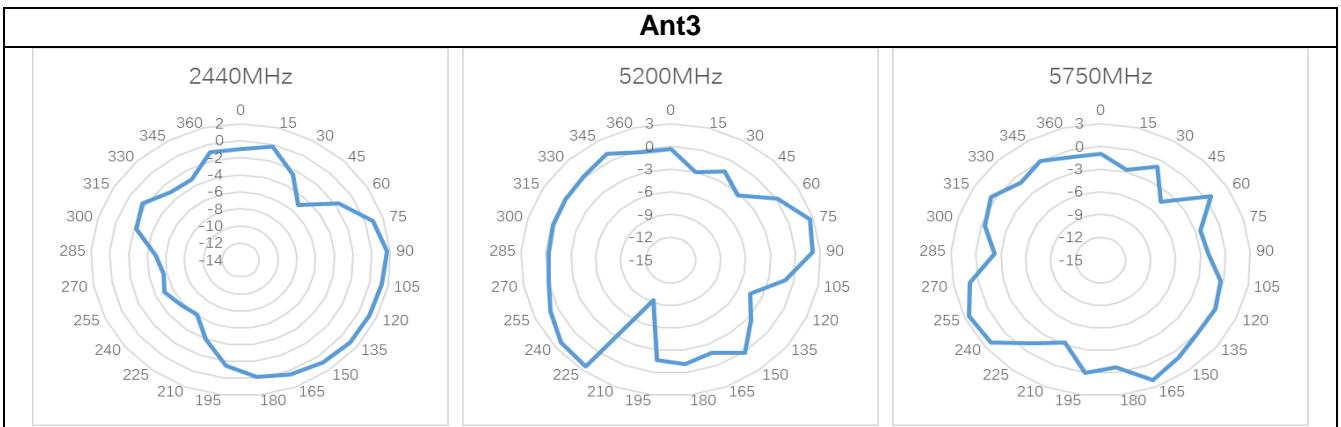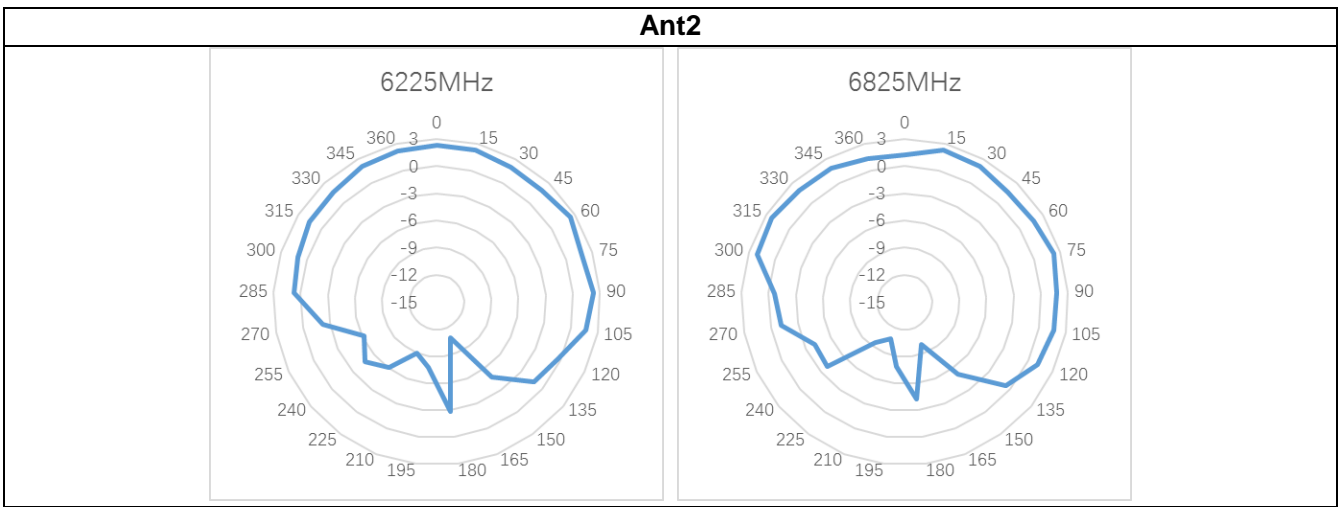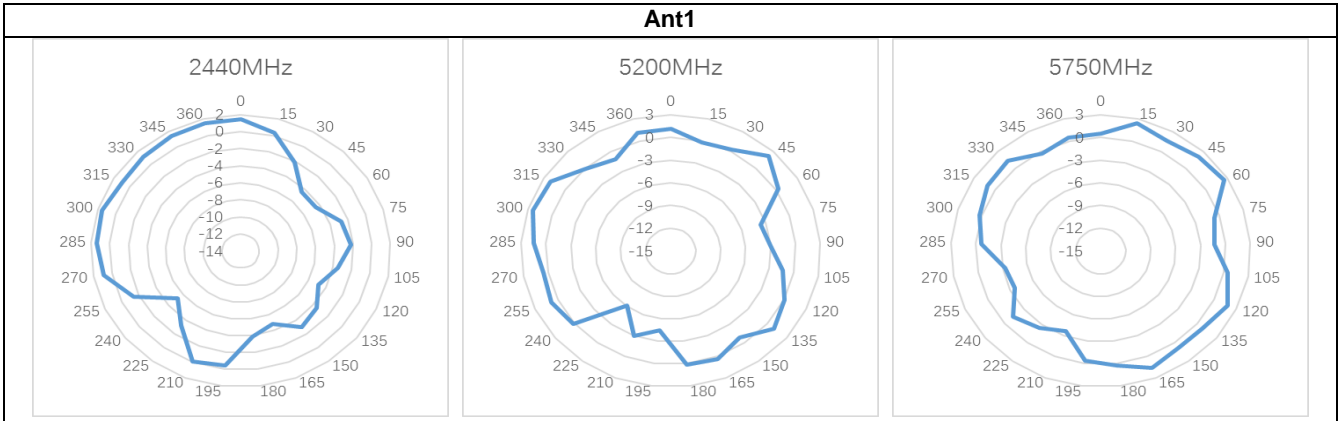

Ant4

6225MHz

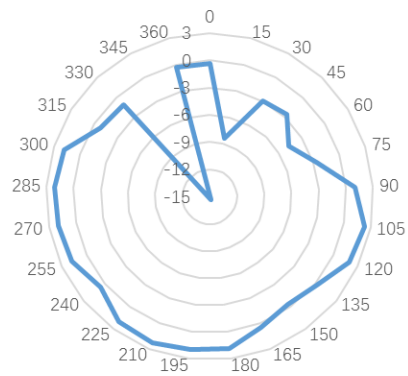

6825MHz

