

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5145.400	47.369	43.727	-6.631	54.000	3.642	AV
2		5150.000	46.261	42.620	-7.739	54.000	3.641	AV
3		5219.275	91.979	88.668	N/A	N/A	3.311	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

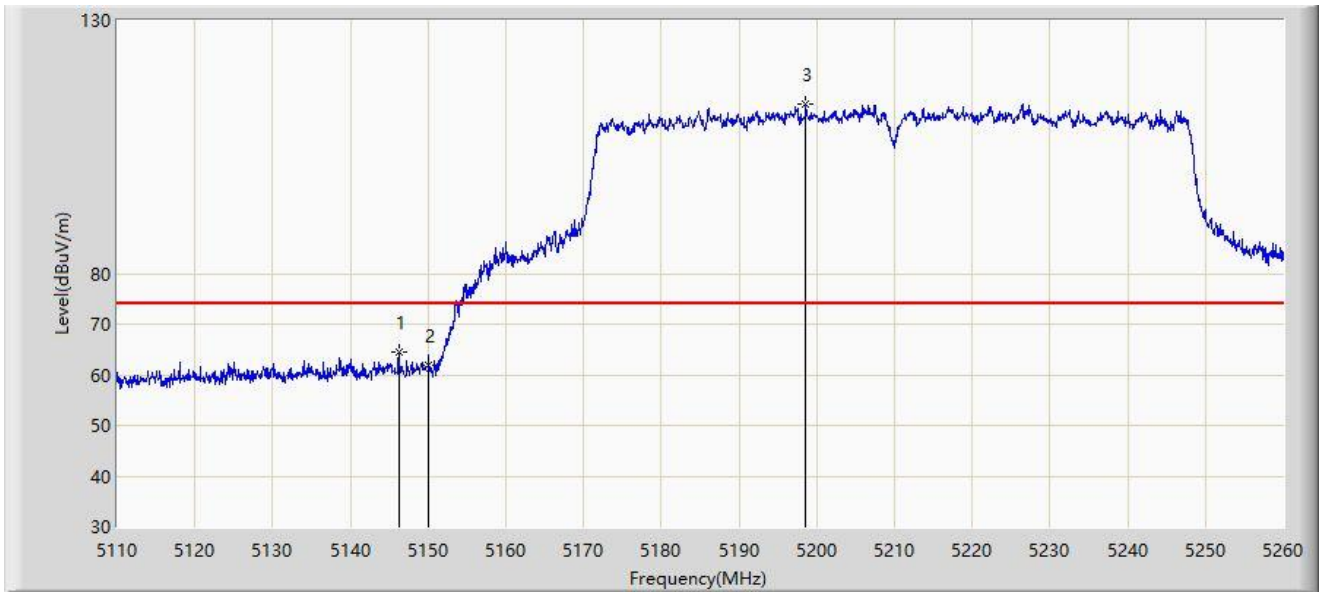


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5146.225	64.367	60.723	-9.633	74.000	3.644	PK
2		5150.000	61.878	58.237	-12.122	74.000	3.641	PK
3		5198.575	113.529	110.241	N/A	N/A	3.288	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

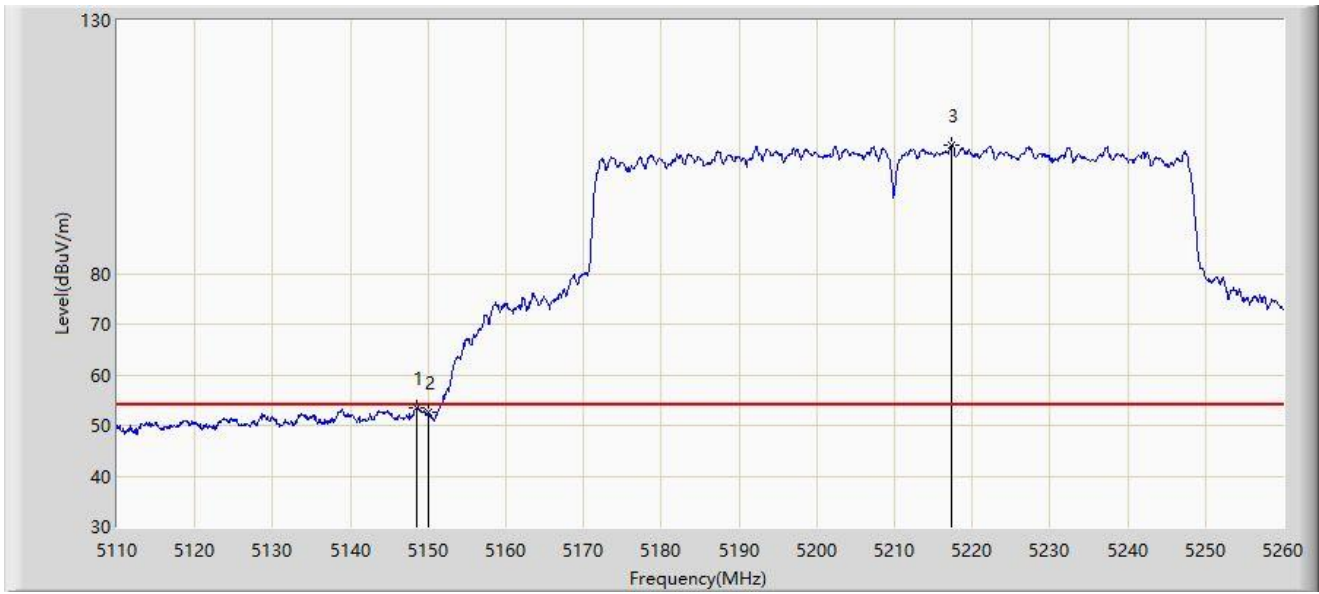


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.625	53.595	49.948	-0.405	54.000	3.647	AV
2		5150.000	52.587	48.946	-1.413	54.000	3.641	AV
3		5217.250	105.329	102.020	N/A	N/A	3.310	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

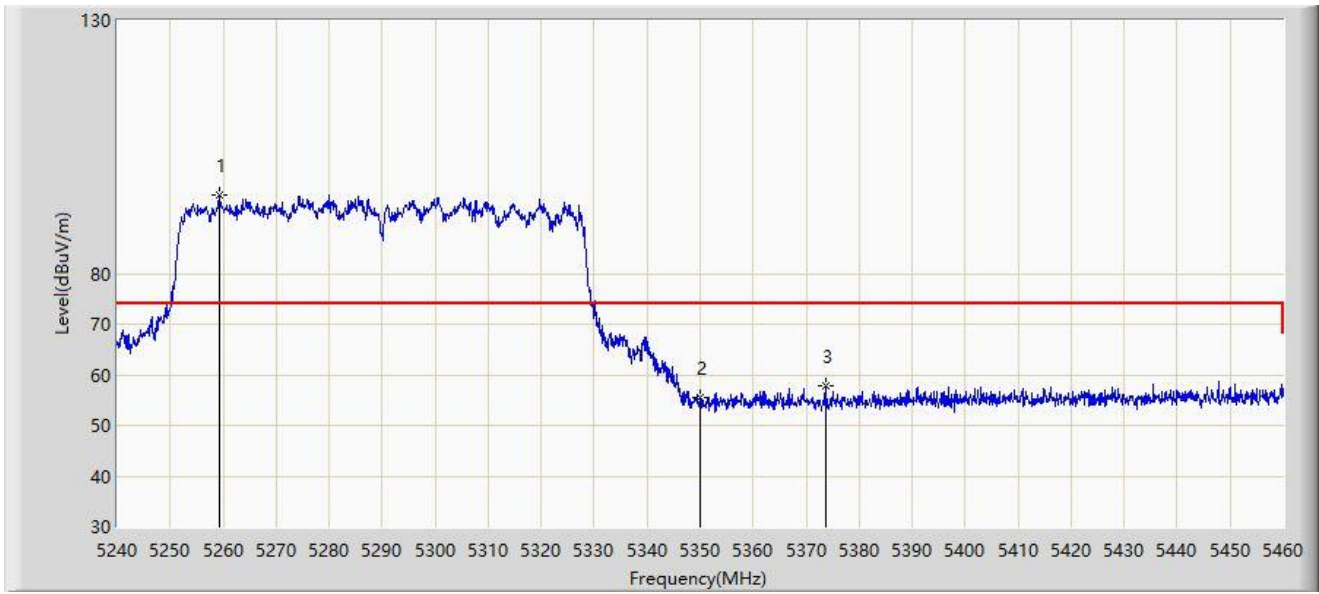


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5259.360	95.375	92.123	N/A	N/A	3.252	PK
2		5350.000	55.485	52.140	-18.515	74.000	3.344	PK
3	*	5373.650	57.927	54.551	-16.073	74.000	3.376	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

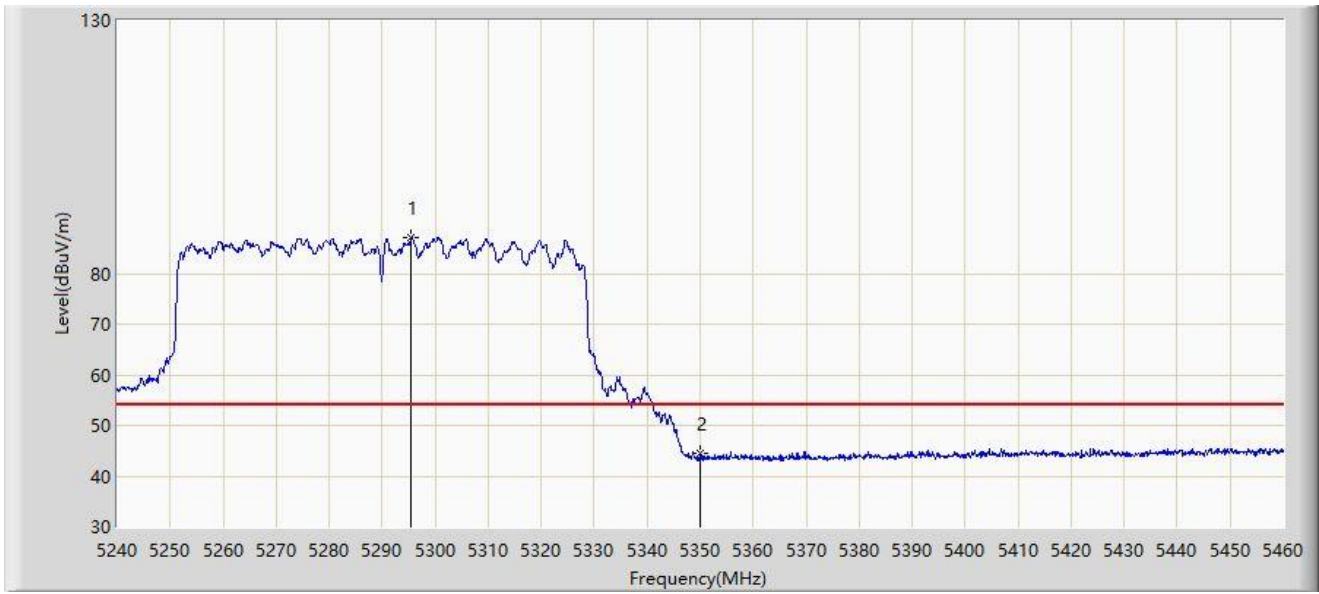


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5295.440	87.022	83.730	N/A	N/A	3.292	AV
2	*	5350.000	44.577	41.232	-9.423	54.000	3.344	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

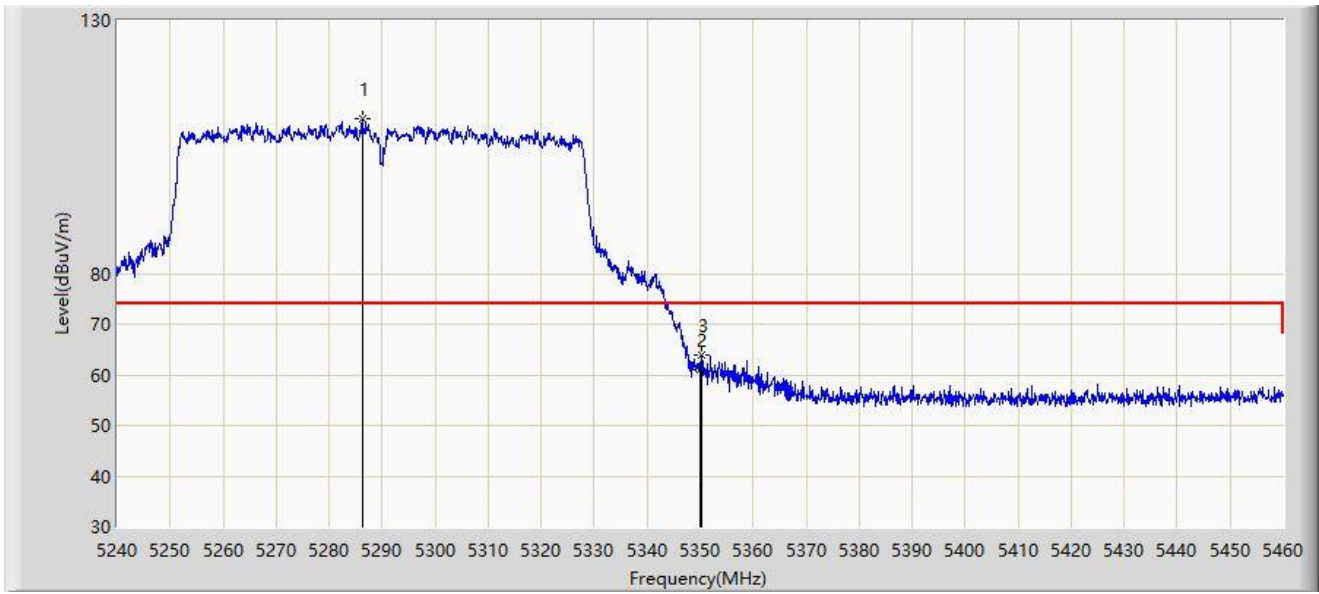


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5286.200	110.480	107.306	N/A	N/A	3.174	PK
2		5350.000	61.094	57.749	-12.906	74.000	3.344	PK
3	*	5350.330	63.948	60.609	-10.052	74.000	3.340	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

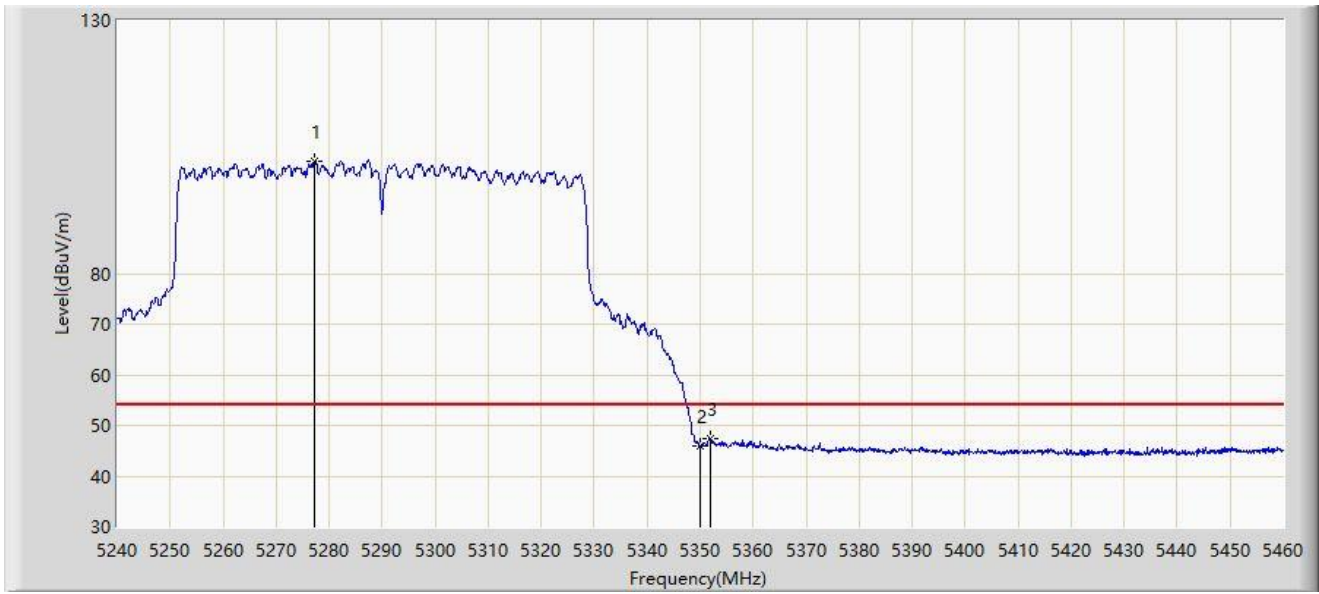


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5277.290	102.294	99.191	N/A	N/A	3.103	AV
2		5350.000	45.998	42.653	-8.002	54.000	3.344	AV
3	*	5351.870	47.254	43.941	-6.746	54.000	3.314	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

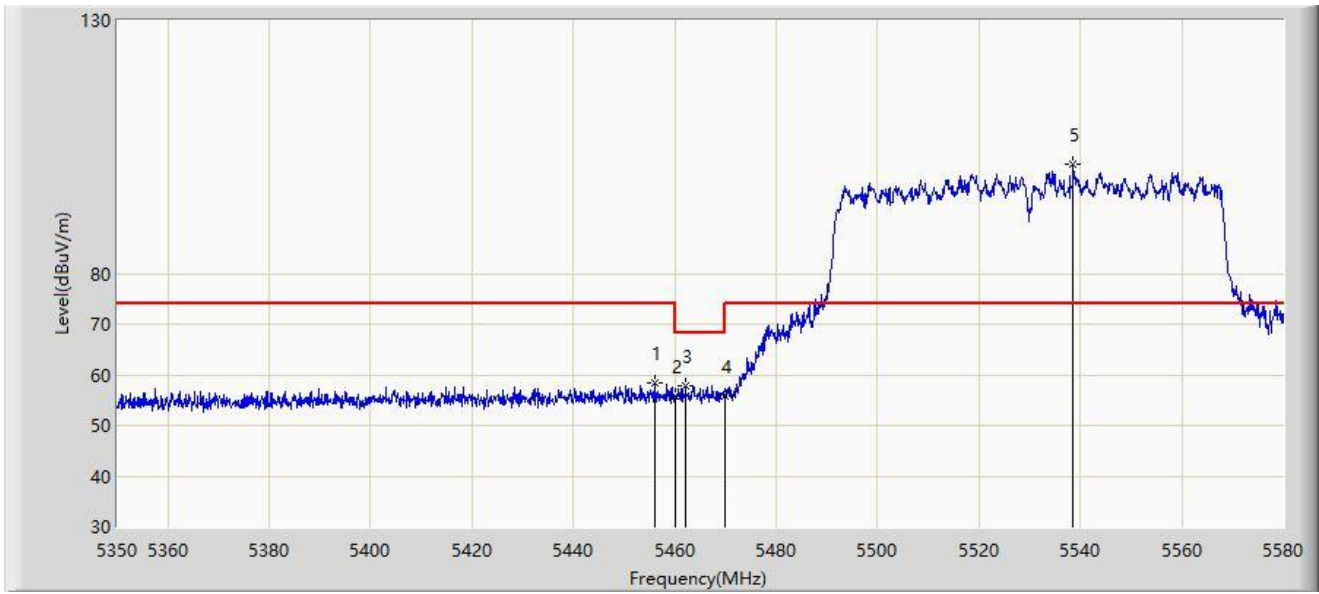

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.145	58.380	54.783	-15.620	74.000	3.597	PK
2		5460.000	57.758	52.128	-18.242	74.000	3.630	PK
3	*	5462.125	57.851	54.208	-10.349	68.200	3.643	PK
4		5470.000	55.801	52.110	-12.399	68.200	3.691	PK
5		5538.600	101.579	97.968	N/A	N/A	3.610	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

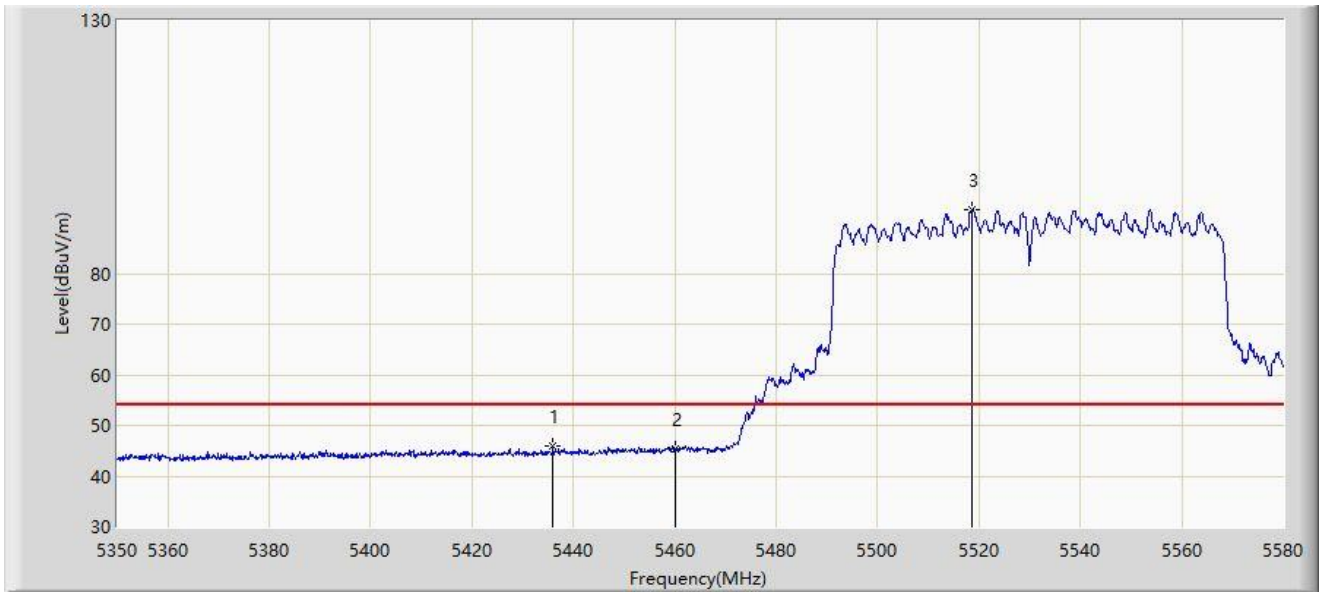


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5435.905	45.871	42.329	-8.129	54.000	3.541	AV
2		5460.000	45.297	41.667	-8.703	54.000	3.630	AV
3		5518.590	92.586	88.888	N/A	N/A	3.698	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

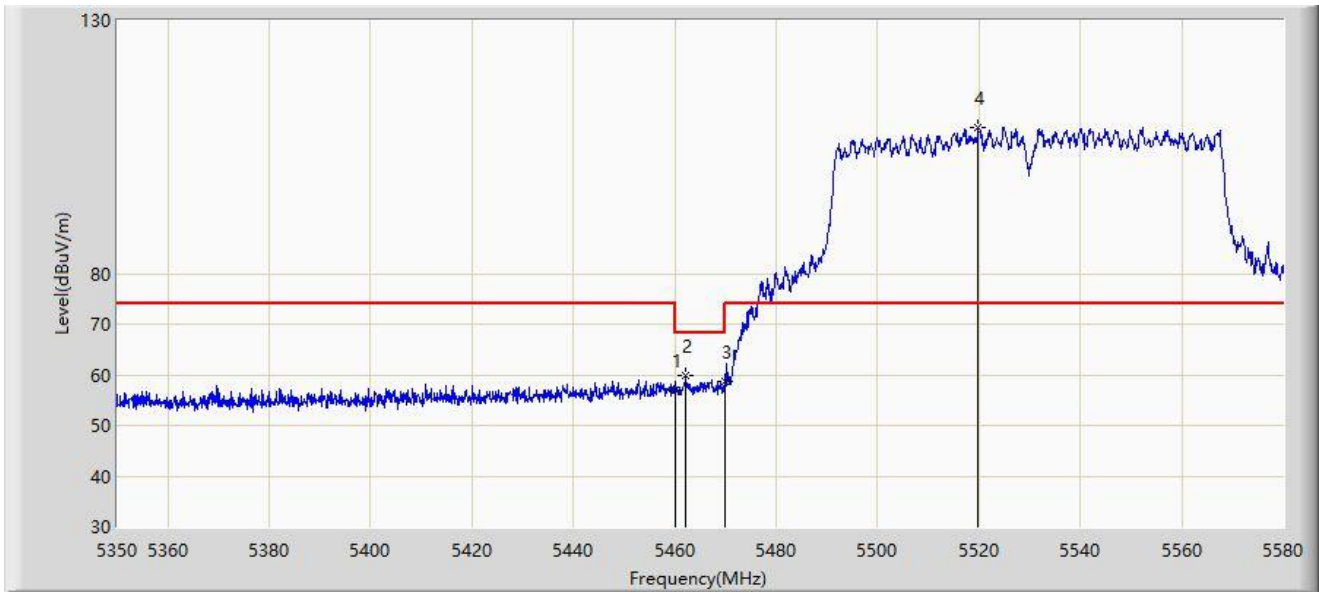


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5460.000	57.055	53.425	-16.945	74.000	3.630	PK
2	*	5462.240	59.965	56.321	-8.235	68.200	3.644	PK
3		5470.000	58.714	55.023	-9.486	68.200	3.691	PK
4		5519.740	108.804	105.118	N/A	N/A	3.686	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

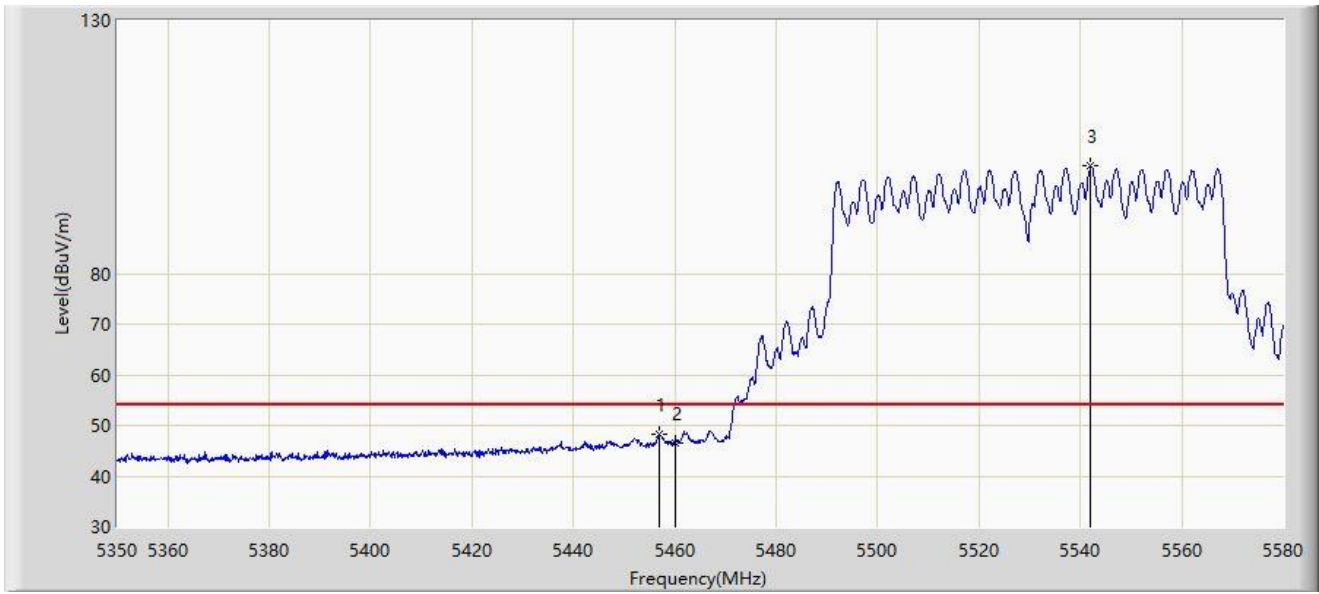


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.835	48.147	44.537	-5.853	54.000	3.610	AV
2		5460.000	46.630	43.000	-7.370	54.000	3.630	AV
3		5541.935	101.190	97.545	N/A	N/A	3.645	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

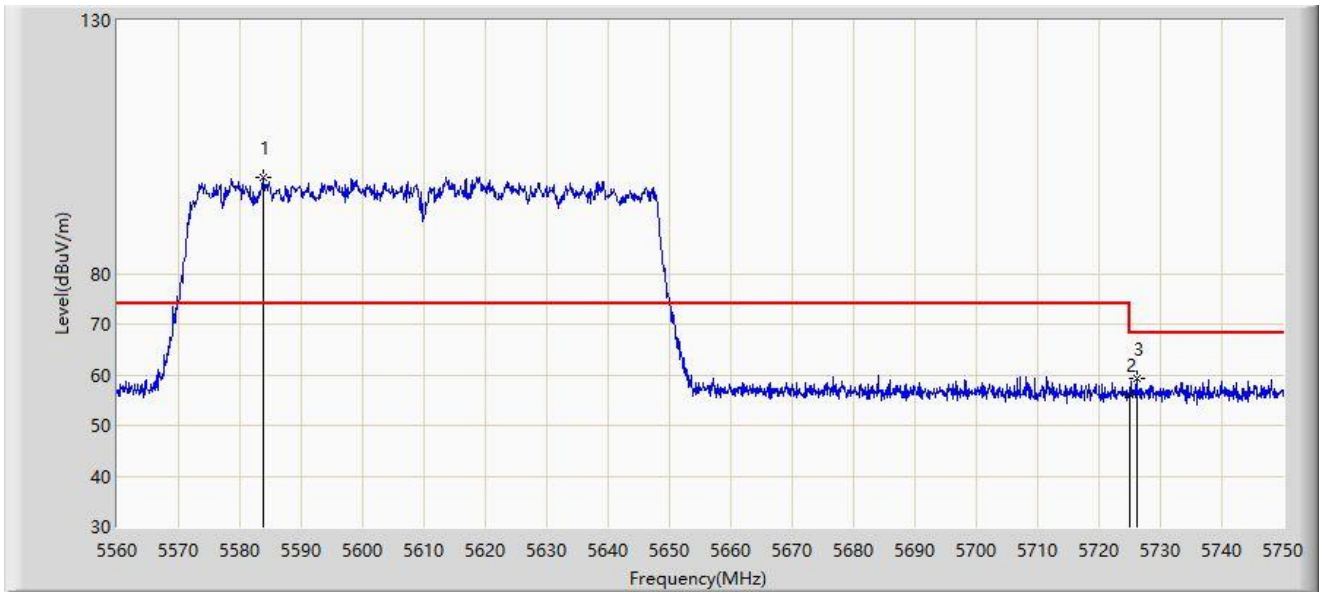


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5583.845	98.934	95.092	N/A	N/A	3.843	PK
2		5725.000	56.213	52.270	-11.987	68.200	3.943	PK
3	*	5726.155	59.266	55.319	-8.934	68.200	3.947	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

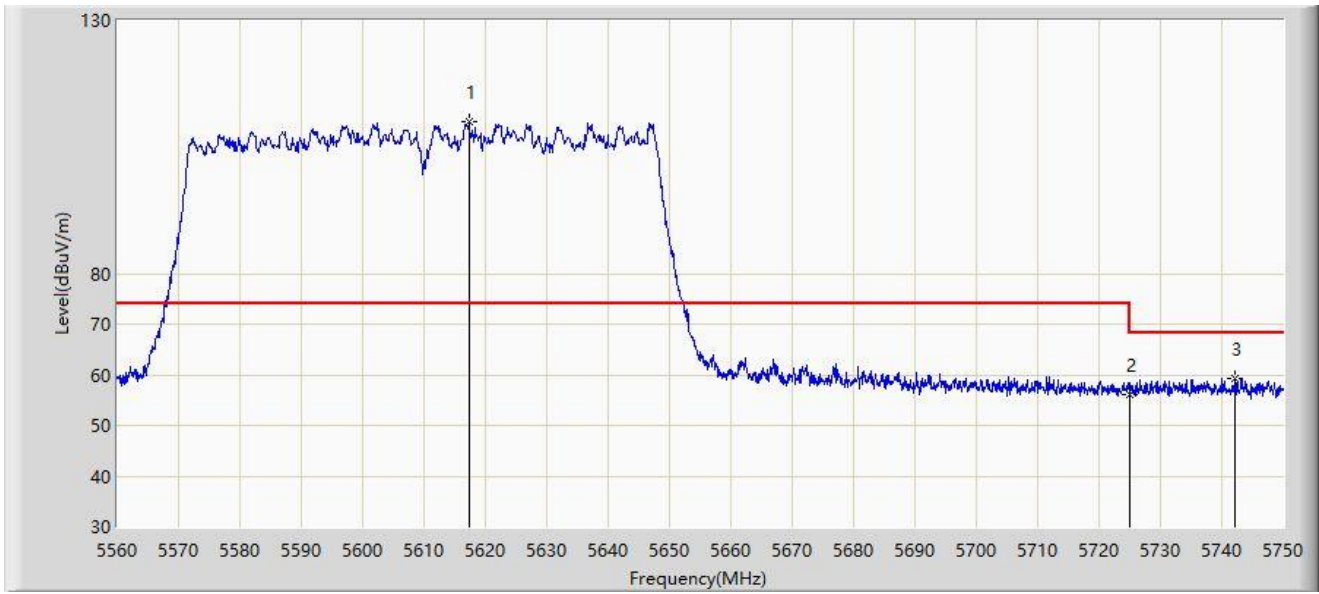


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5617.285	109.973	106.224	N/A	N/A	3.750	PK
2		5725.000	56.166	52.223	-12.034	68.200	3.943	PK
3	*	5742.210	59.414	55.264	-8.786	68.200	4.151	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

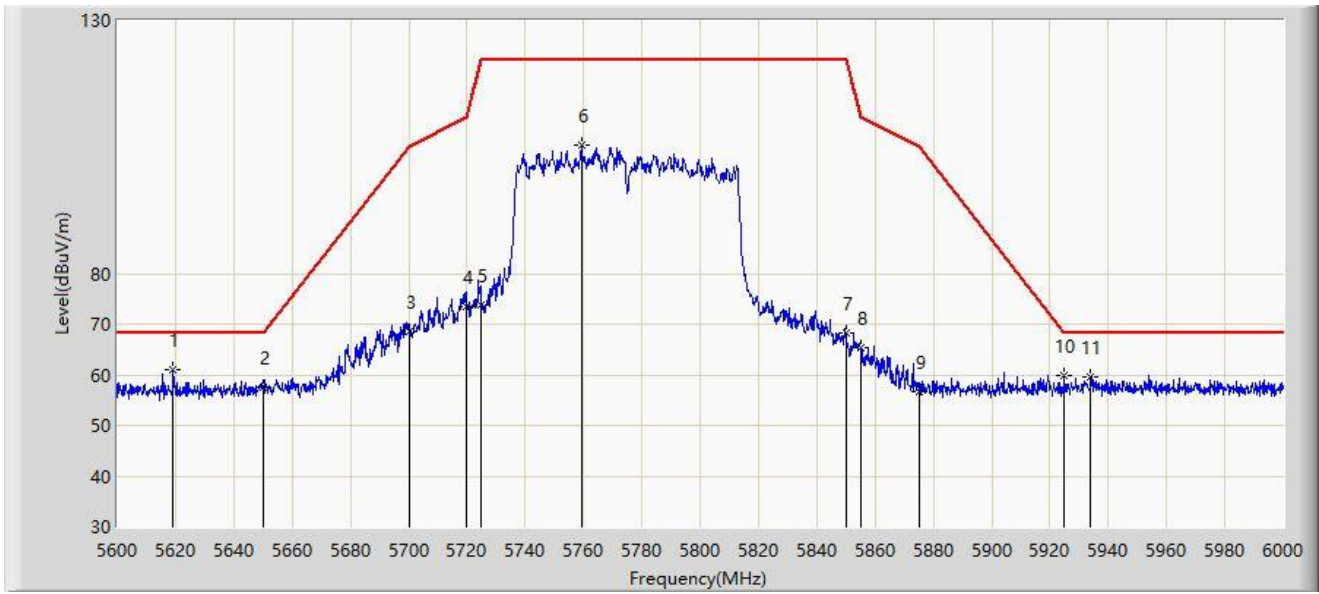


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5619.200	61.036	57.301	-7.164	68.200	3.735	PK
2		5650.000	57.611	53.697	-10.589	68.200	3.914	PK
3		5700.000	68.476	64.561	-36.724	105.200	3.916	PK
4		5720.000	73.488	69.559	-37.312	110.800	3.929	PK
5		5725.000	73.908	69.965	-48.292	122.200	3.943	PK
6		5759.400	105.222	100.988	N/A	N/A	4.233	PK
7		5850.000	68.127	63.683	-54.073	122.200	4.444	PK
8		5855.000	65.251	60.851	-45.549	110.800	4.400	PK
9		5875.000	56.689	52.378	-48.511	105.200	4.312	PK
10		5925.000	59.744	55.113	-8.456	68.200	4.630	PK
11		5934.000	59.660	55.060	-8.540	68.200	4.600	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

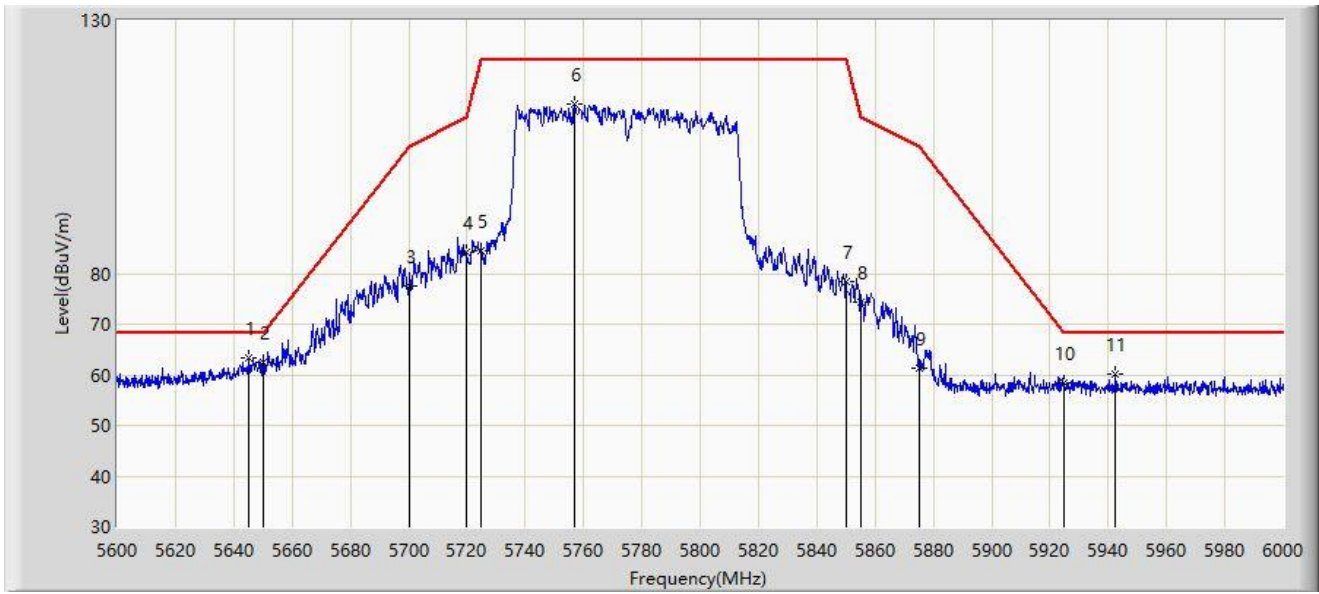

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5645.200	63.431	59.628	-4.769	68.200	3.803	PK
2		5650.000	62.538	58.624	-5.662	68.200	3.914	PK
3		5700.000	77.607	73.692	-27.593	105.200	3.916	PK
4		5720.000	84.273	80.344	-26.527	110.800	3.929	PK
5		5725.000	84.365	80.422	-37.835	122.200	3.943	PK
6		5756.800	113.473	109.252	N/A	N/A	4.221	PK
7		5850.000	78.518	74.074	-43.682	122.200	4.444	PK
8		5855.000	74.347	69.947	-36.453	110.800	4.400	PK
9		5875.000	61.222	56.911	-43.978	105.200	4.312	PK
10		5925.000	58.311	53.680	-9.889	68.200	4.630	PK
11		5942.600	60.067	55.542	-8.133	68.200	4.524	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

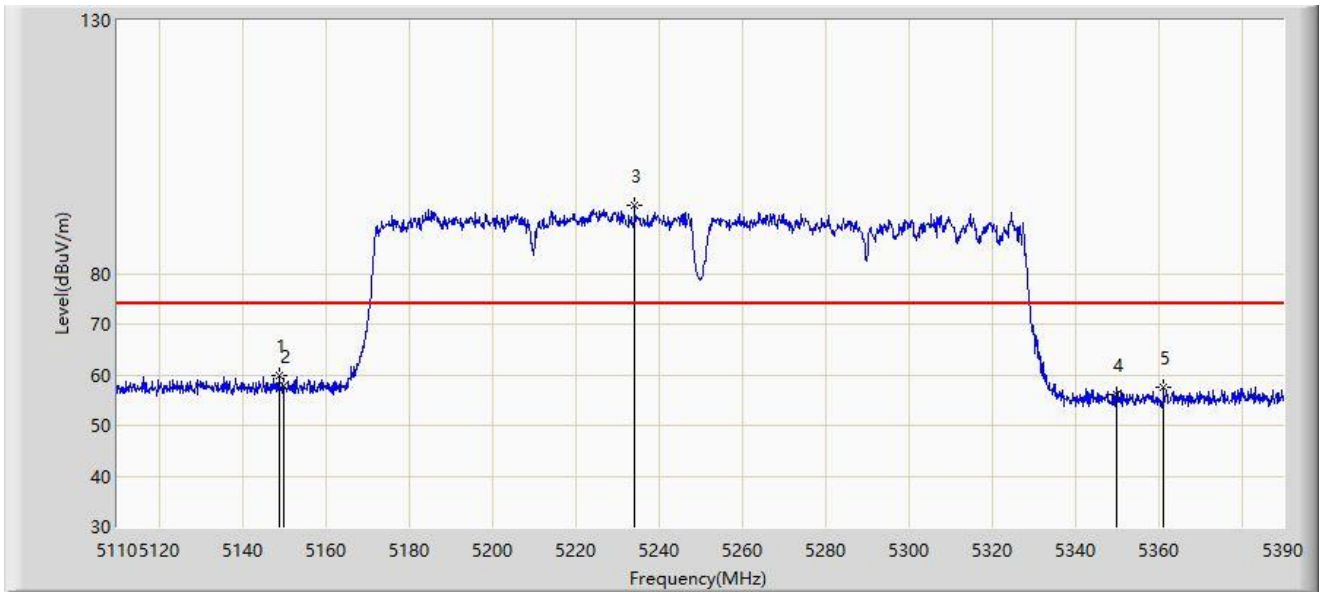

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.780	59.773	56.127	-14.227	74.000	3.646	PK
2		5150.000	57.755	54.114	-16.245	74.000	3.641	PK
3		5234.180	93.353	89.978	N/A	N/A	3.375	PK
4		5350.000	56.074	52.729	-17.926	74.000	3.344	PK
5		5361.300	57.506	54.222	-16.494	74.000	3.284	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

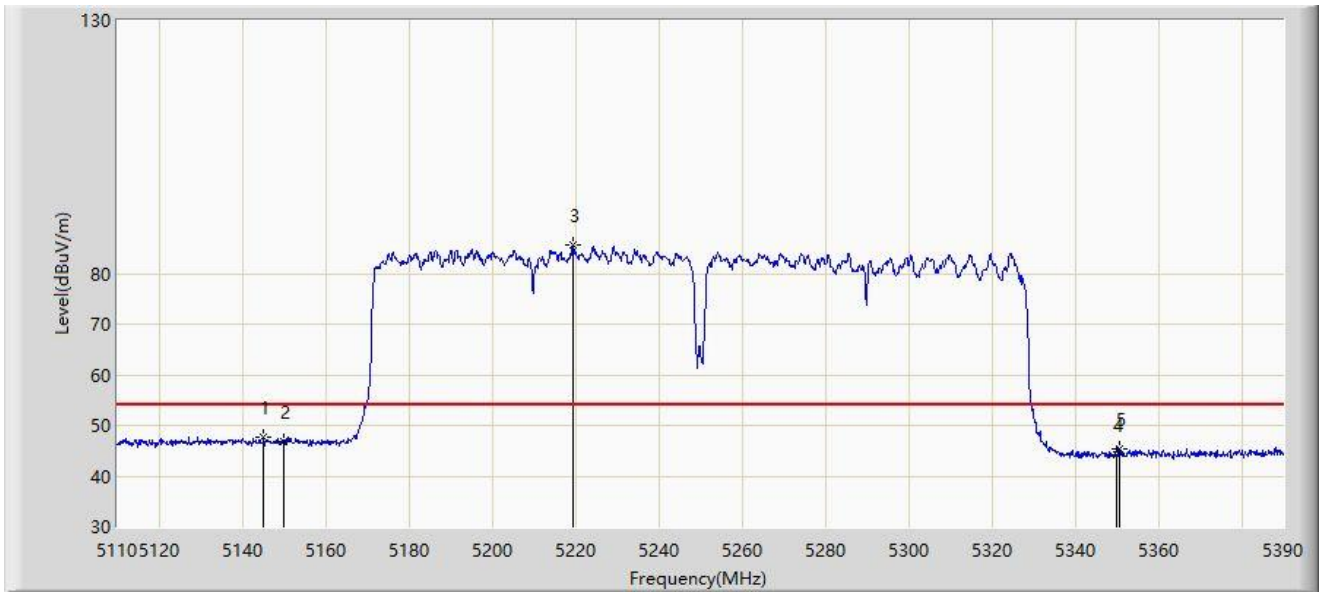


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.140	47.623	43.982	-6.377	54.000	3.641	AV
2		5150.000	46.902	43.261	-7.098	54.000	3.641	AV
3		5219.340	85.592	82.281	N/A	N/A	3.311	AV
4		5350.000	44.191	40.846	-9.809	54.000	3.344	AV
5		5350.660	45.448	42.114	-8.552	54.000	3.335	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

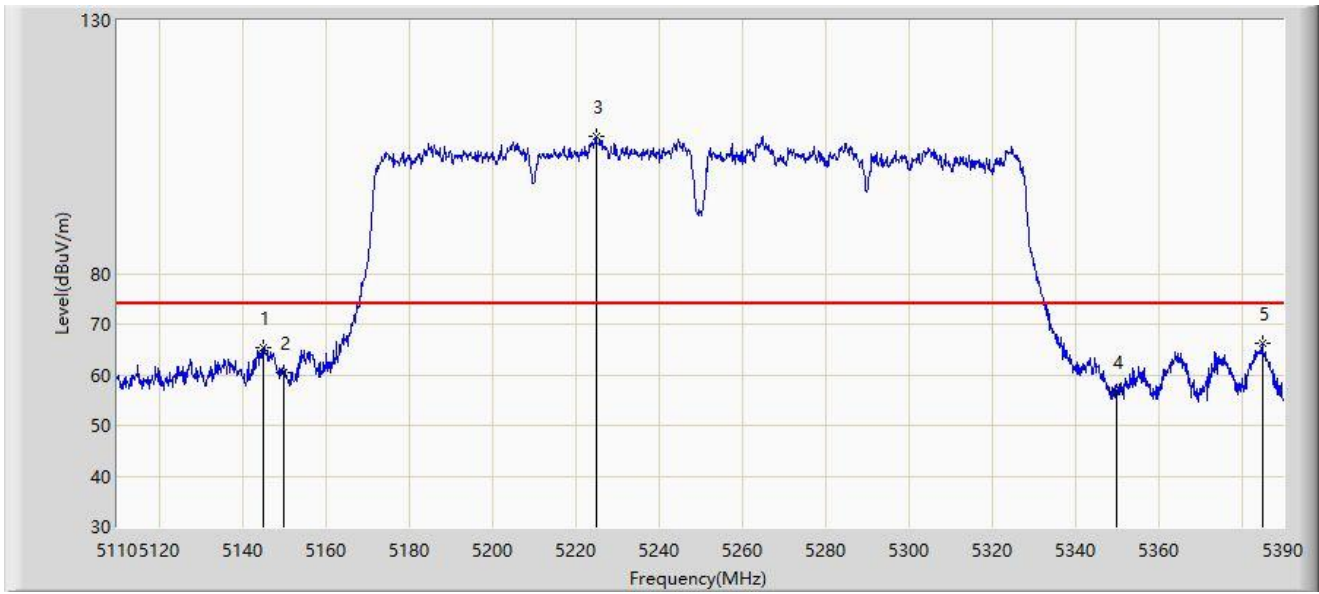


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5145.000	65.271	61.631	-8.729	74.000	3.640	PK
2		5150.000	60.408	56.767	-13.592	74.000	3.641	PK
3		5224.940	107.007	103.682	N/A	N/A	3.324	PK
4		5350.000	56.559	53.214	-17.441	74.000	3.344	PK
5	*	5384.960	66.164	62.562	-7.836	74.000	3.602	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

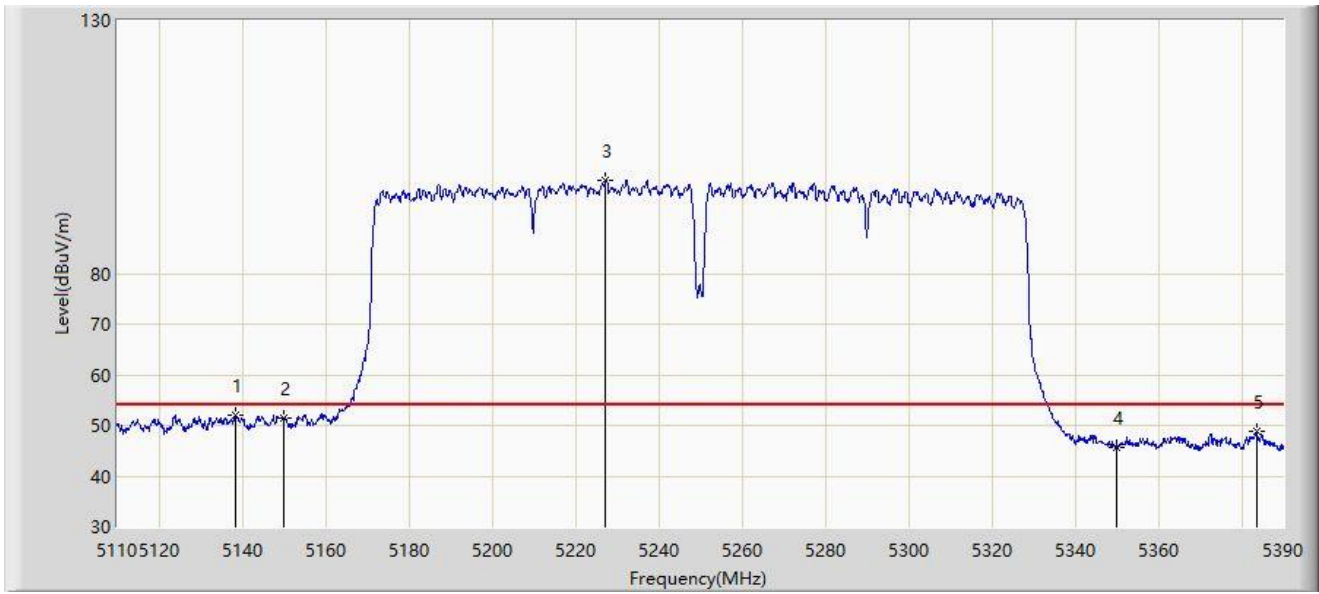


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5138.420	52.099	48.479	-1.901	54.000	3.621	AV
2		5150.000	51.493	47.852	-2.507	54.000	3.641	AV
3		5227.180	98.333	94.994	N/A	N/A	3.340	AV
4		5350.000	45.737	42.392	-8.263	54.000	3.344	AV
5		5383.560	48.707	45.133	-5.293	54.000	3.574	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

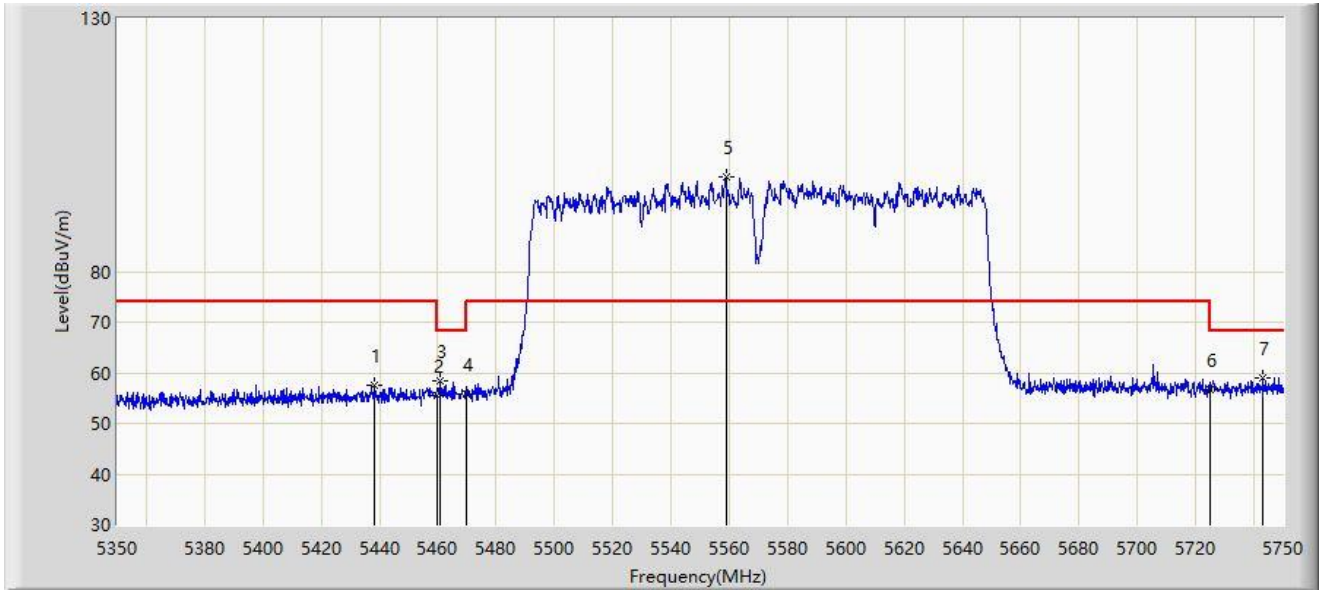


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5438.000	57.640	54.101	-16.360	74.000	3.540	PK
2		5460.000	55.497	51.867	-18.503	74.000	3.630	PK
3		5460.600	58.305	54.671	-9.895	68.200	3.634	PK
4		5470.000	55.861	52.170	-12.339	68.200	3.691	PK
5		5558.800	98.743	95.008	N/A	N/A	3.735	PK
6		5725.000	56.686	52.743	-11.514	68.200	3.943	PK
7	*	5743.200	58.960	54.799	-9.240	68.200	4.161	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

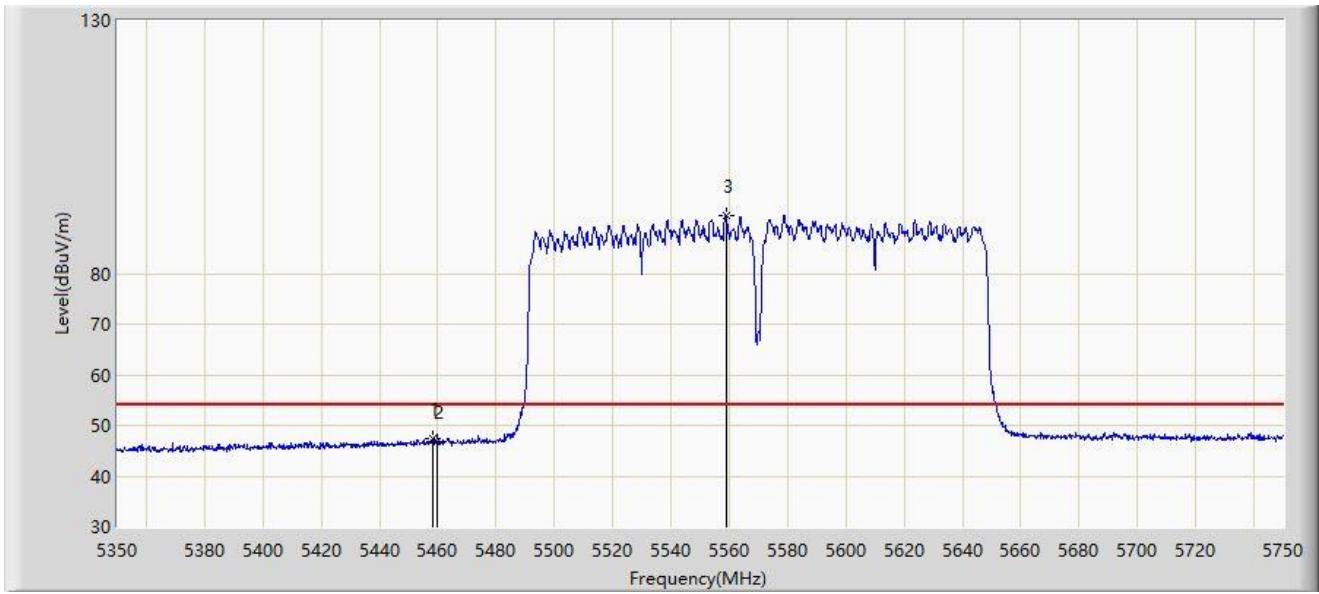


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.200	47.267	43.648	-6.733	54.000	3.619	AV
2		5460.000	46.727	43.097	-7.273	54.000	3.630	AV
3		5558.800	91.483	87.748	N/A	N/A	3.735	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

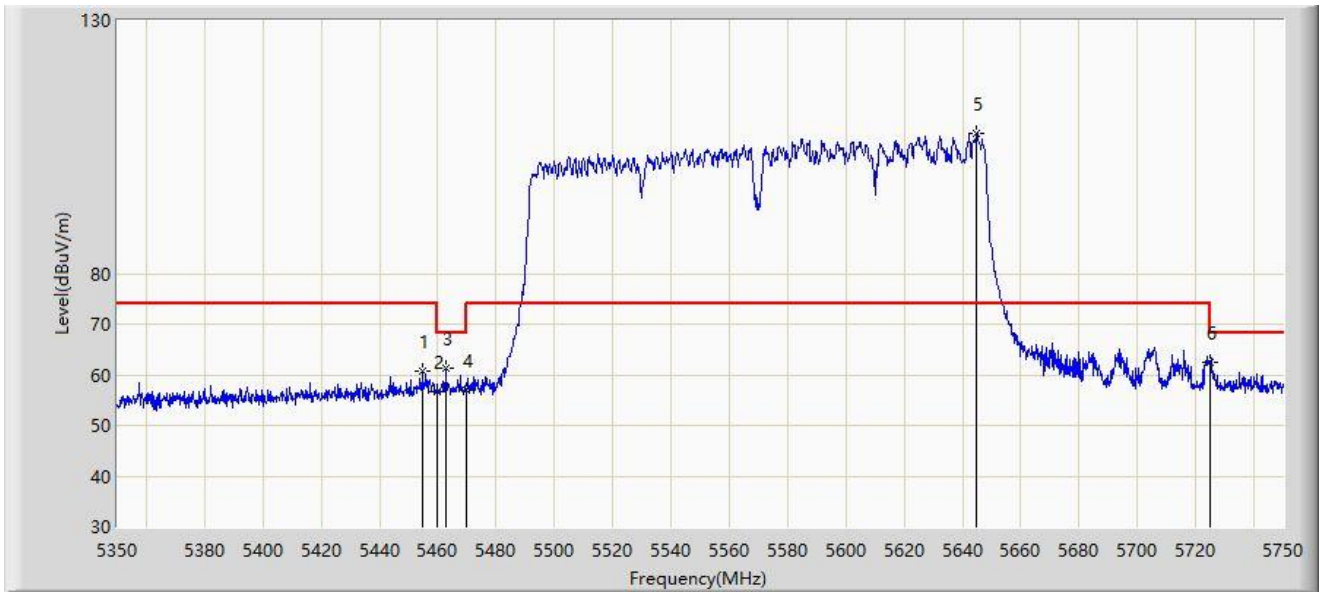


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5454.800	60.605	57.032	-13.395	74.000	3.573	PK
2		5460.000	56.792	53.162	-17.208	74.000	3.630	PK
3		5462.800	61.234	57.587	-6.966	68.200	3.648	PK
4		5470.000	56.933	53.242	-11.267	68.200	3.691	PK
5		5644.800	107.620	103.826	N/A	N/A	3.793	PK
6	*	5725.000	62.451	58.508	-5.749	68.200	3.943	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

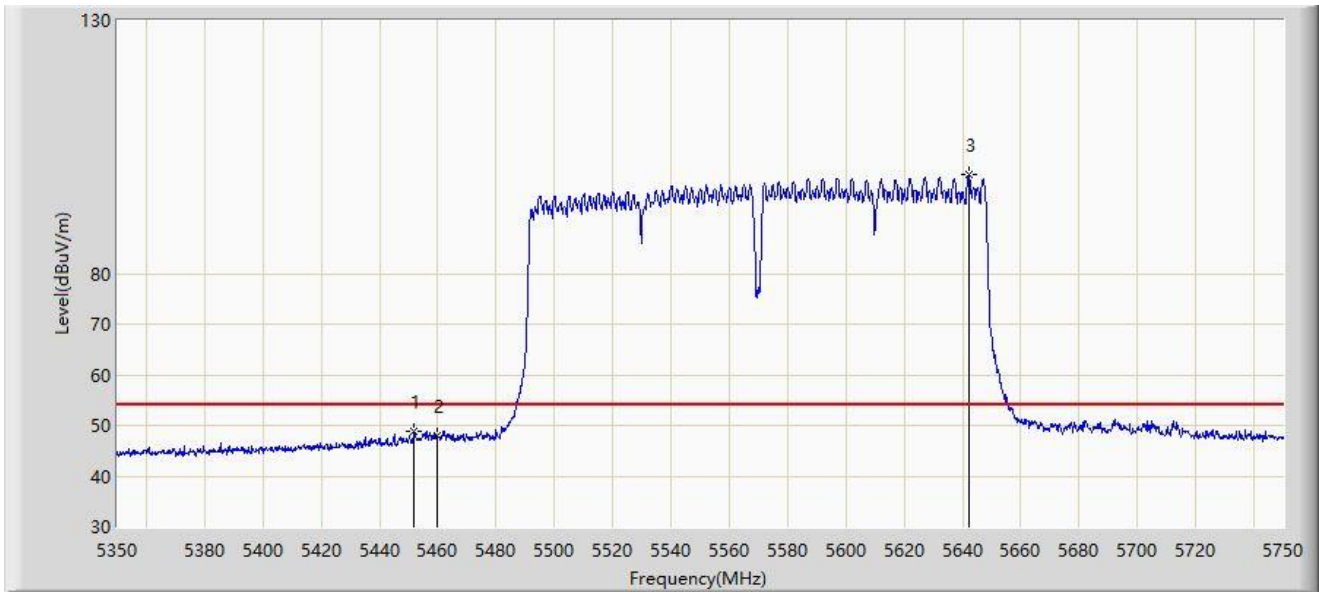


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5452.000	48.827	45.271	-5.173	54.000	3.555	AV
2		5460.000	47.894	44.264	-6.106	54.000	3.630	AV
3		5642.200	99.479	95.745	N/A	N/A	3.734	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

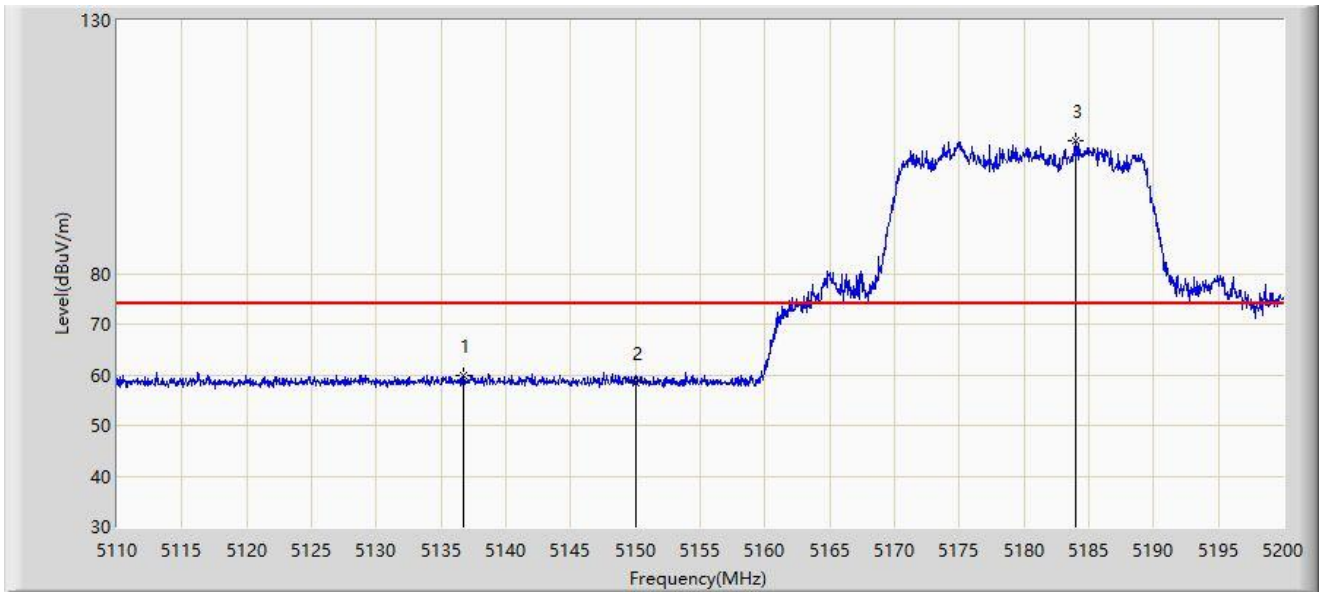

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5136.775	59.719	56.104	-14.281	74.000	3.615	PK
2		5150.000	58.550	54.909	-15.450	74.000	3.641	PK
3		5184.025	106.242	102.901	N/A	N/A	3.341	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5139.745	48.533	44.909	-5.467	54.000	3.625	AV
2		5150.000	48.456	44.815	-5.544	54.000	3.641	AV
3		5181.055	96.100	92.768	N/A	N/A	3.332	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

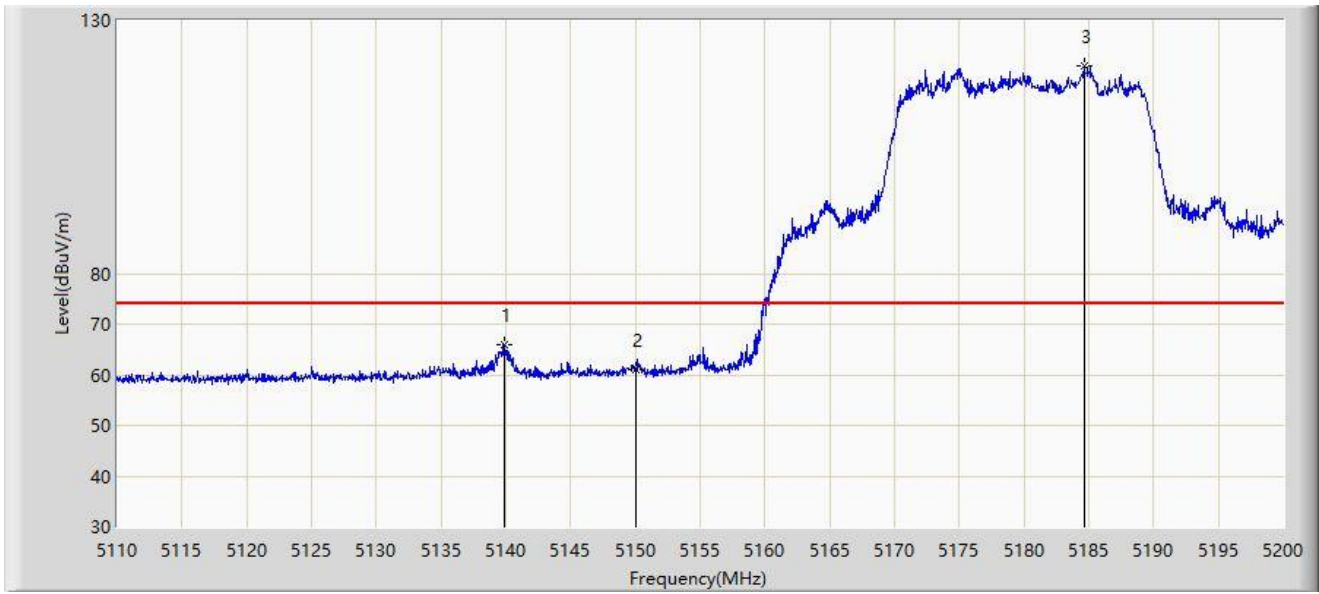


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5139.835	65.984	62.359	-8.016	74.000	3.625	PK
2		5150.000	60.985	57.344	-13.015	74.000	3.641	PK
3		5184.610	121.018	117.675	N/A	N/A	3.343	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

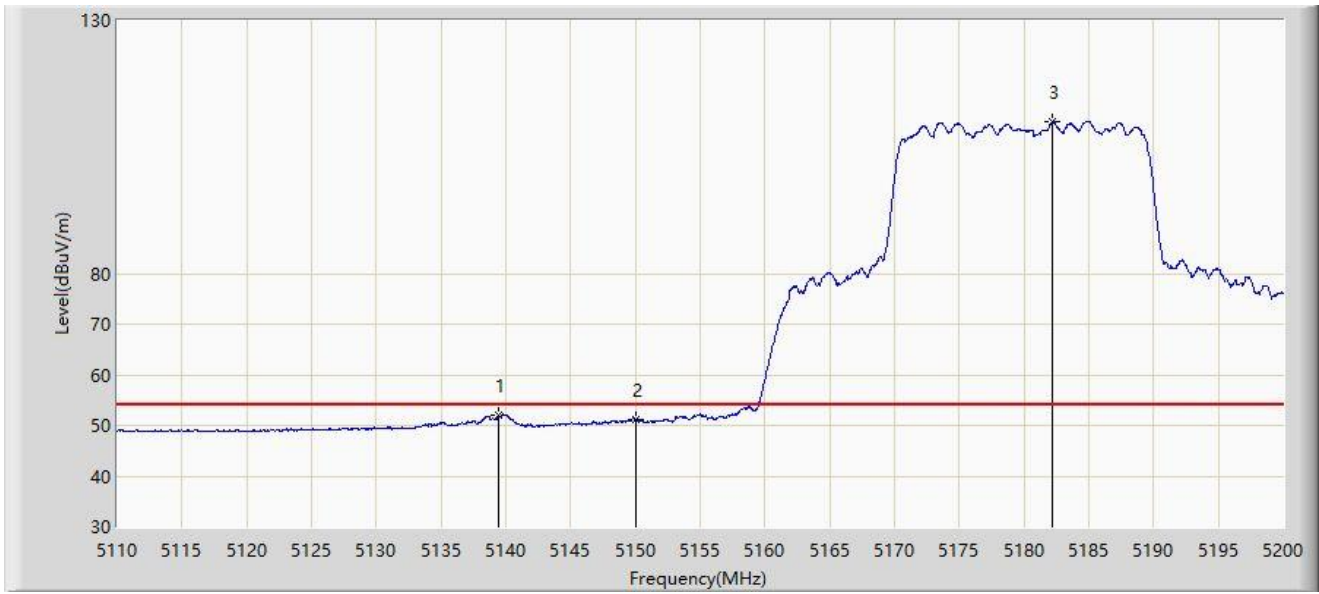


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5139.430	51.916	48.292	-2.084	54.000	3.623	AV
2		5150.000	51.181	47.540	-2.819	54.000	3.641	AV
3		5182.225	109.987	106.655	N/A	N/A	3.332	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

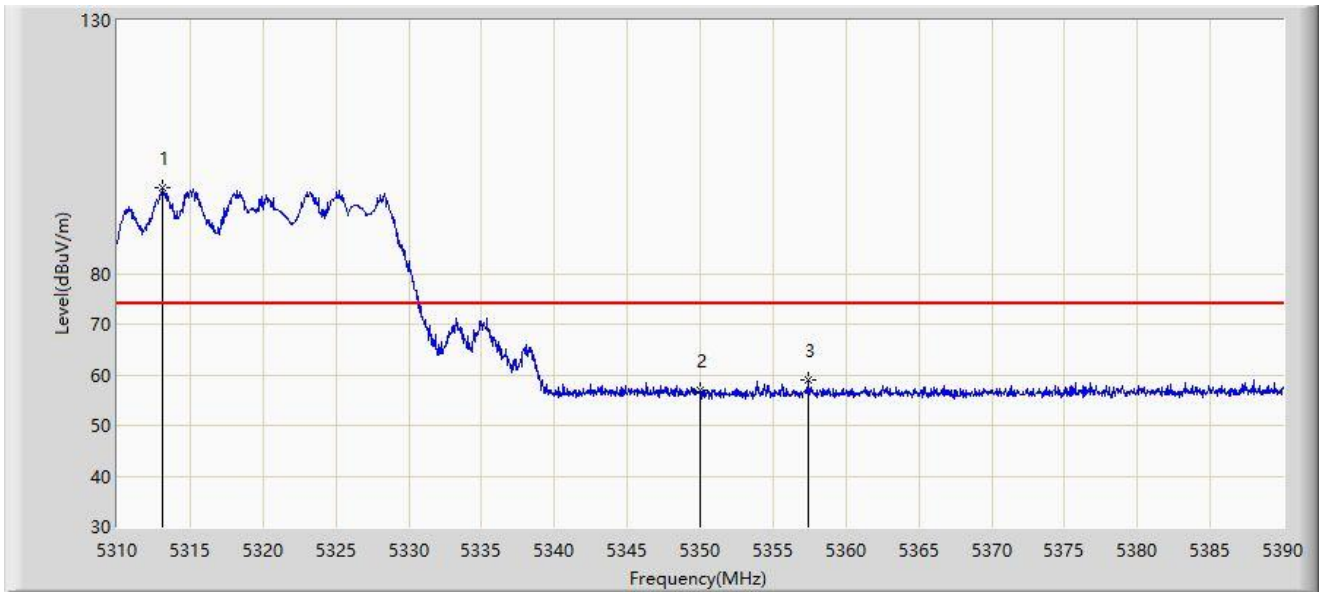


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5313.080	96.823	93.485	N/A	N/A	3.338	PK
2		5350.000	56.961	53.616	-17.039	74.000	3.344	PK
3	*	5357.440	58.908	55.613	-15.092	74.000	3.296	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

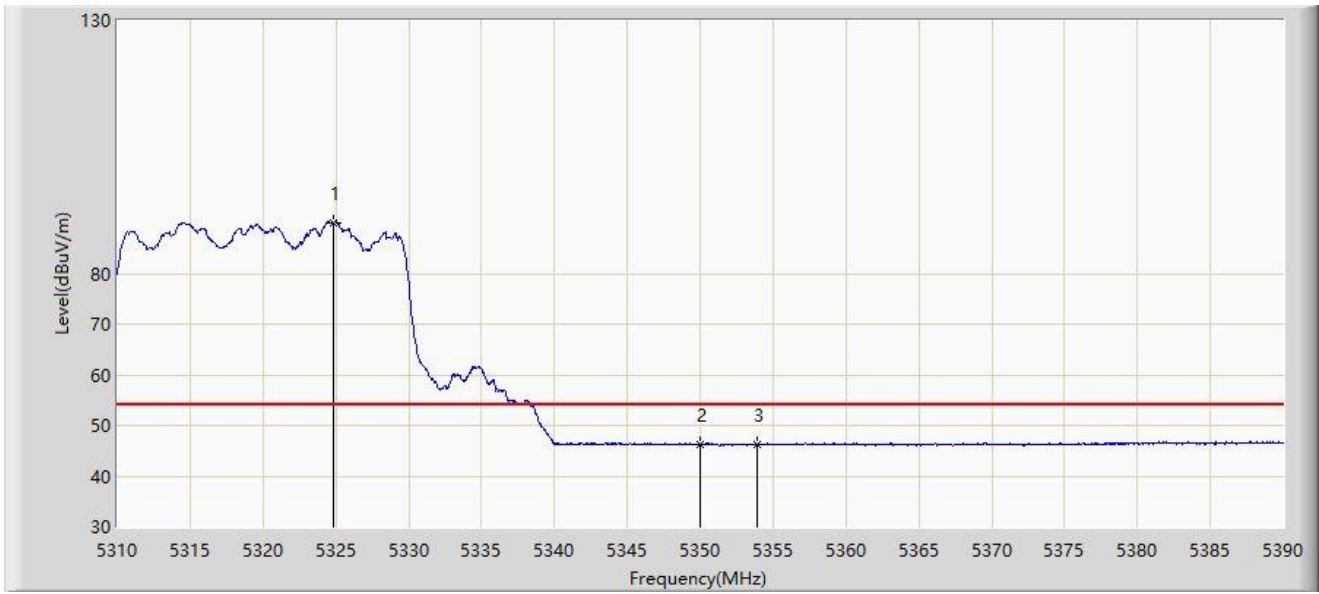


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5324.880	90.135	86.728	N/A	N/A	3.407	AV
2		5350.000	46.288	42.943	-7.712	54.000	3.344	AV
3	*	5353.920	46.360	43.055	-7.640	54.000	3.305	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

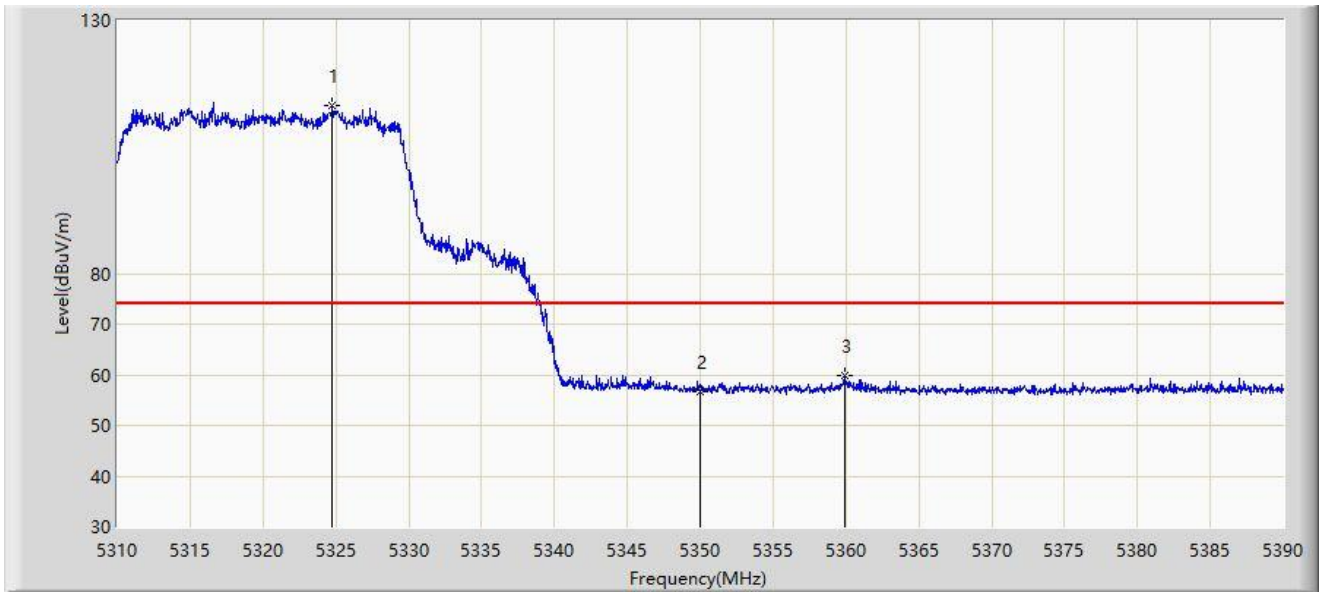


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5324.760	113.055	109.648	N/A	N/A	3.407	PK
2		5350.000	56.674	53.329	-17.326	74.000	3.344	PK
3	*	5359.880	59.884	56.596	-14.116	74.000	3.288	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

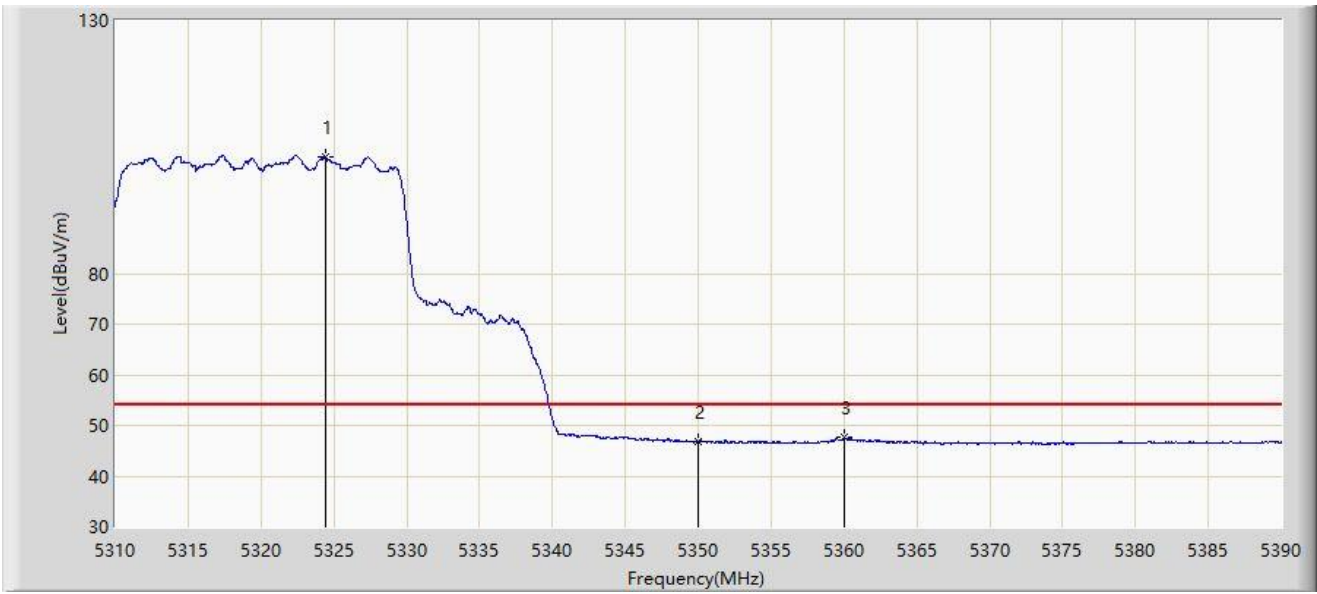


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5324.400	103.136	99.729	N/A	N/A	3.407	AV
2		5350.000	46.687	43.342	-7.313	54.000	3.344	AV
3	*	5360.000	47.587	44.299	-6.413	54.000	3.287	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

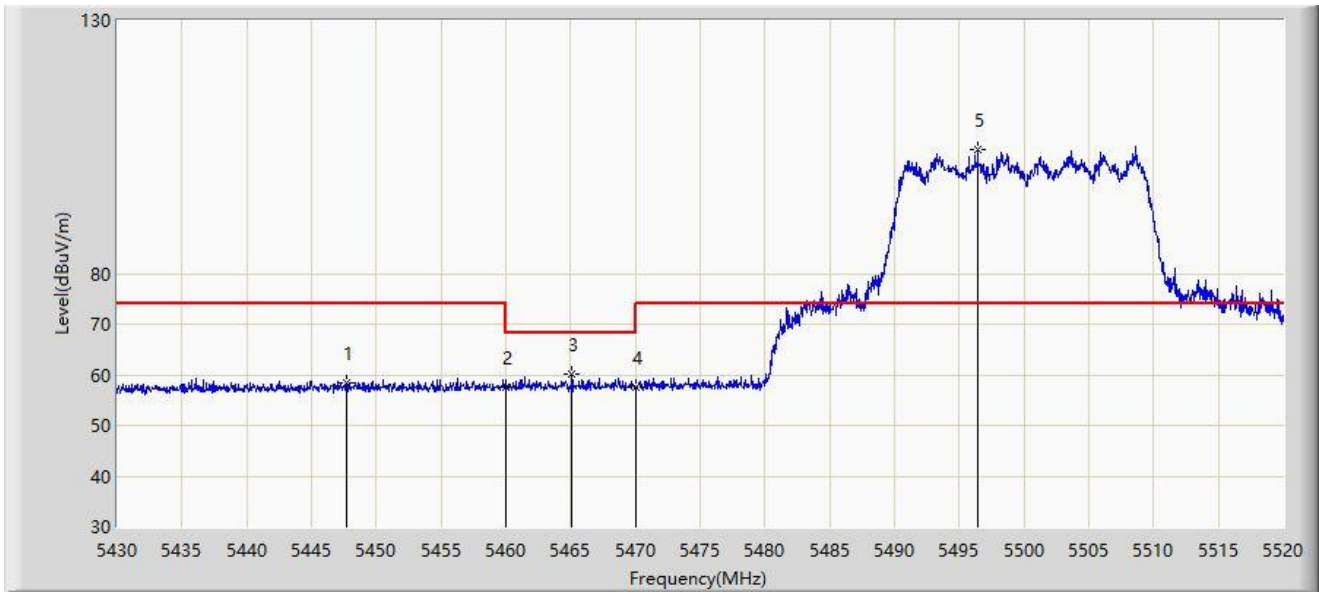

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5447.685	58.483	54.932	-15.517	74.000	3.551	PK
2		5460.000	57.666	54.036	-16.334	74.000	3.630	PK
3	*	5465.100	60.232	56.571	-7.968	68.200	3.662	PK
4		5470.000	57.435	53.744	-10.765	68.200	3.691	PK
5		5496.420	104.507	100.587	N/A	N/A	3.919	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5455.290	47.283	43.701	-6.717	54.000	3.581	AV
2	*	5460.000	47.435	43.805	-6.565	54.000	3.630	AV
3		5503.350	94.467	90.612	N/A	N/A	3.855	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

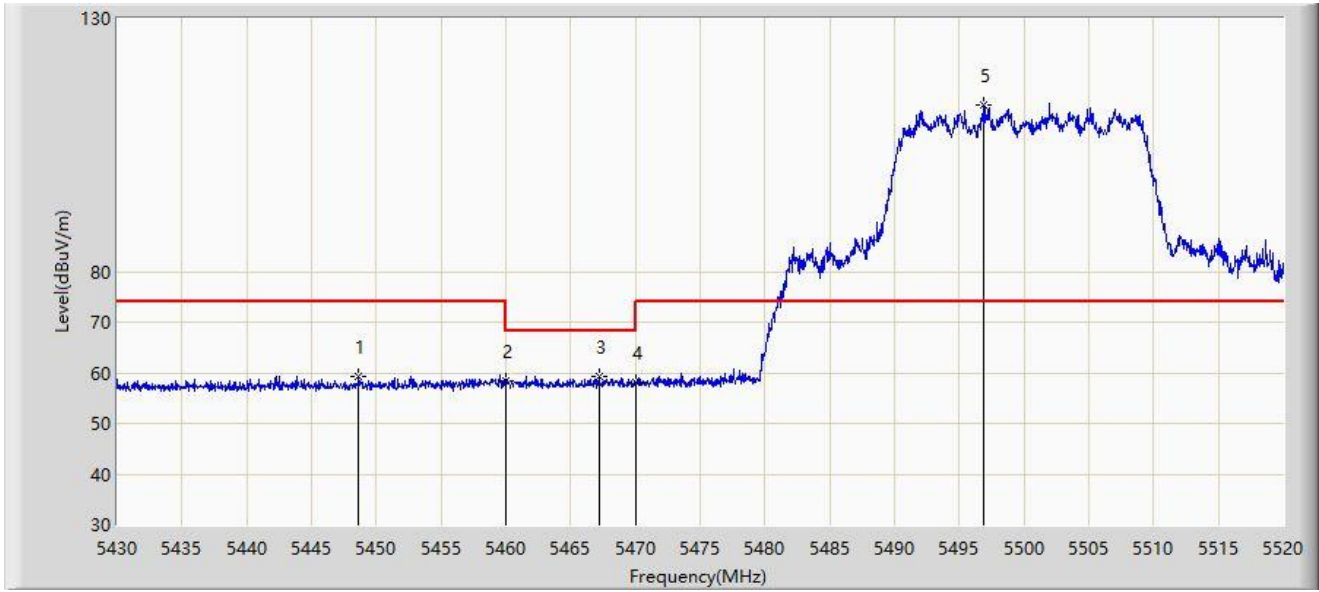


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5448.630	59.258	55.706	-14.742	74.000	3.552	PK
2		5460.000	58.490	54.860	-15.510	74.000	3.630	PK
3	*	5467.170	59.295	55.621	-8.905	68.200	3.674	PK
4		5470.000	57.974	54.283	-10.226	68.200	3.691	PK
5		5496.870	112.911	108.995	N/A	N/A	3.916	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

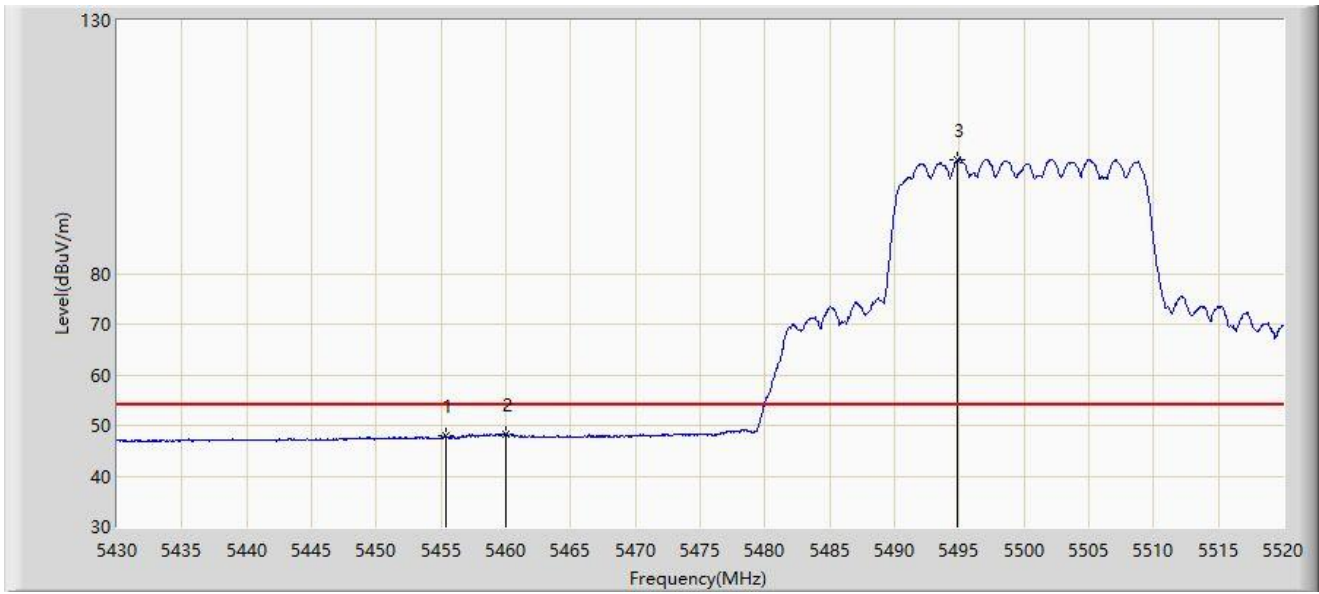


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5455.380	47.872	44.289	-6.128	54.000	3.582	AV
2	*	5460.000	48.206	44.576	-5.794	54.000	3.630	AV
3		5494.845	102.536	98.601	N/A	N/A	3.935	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

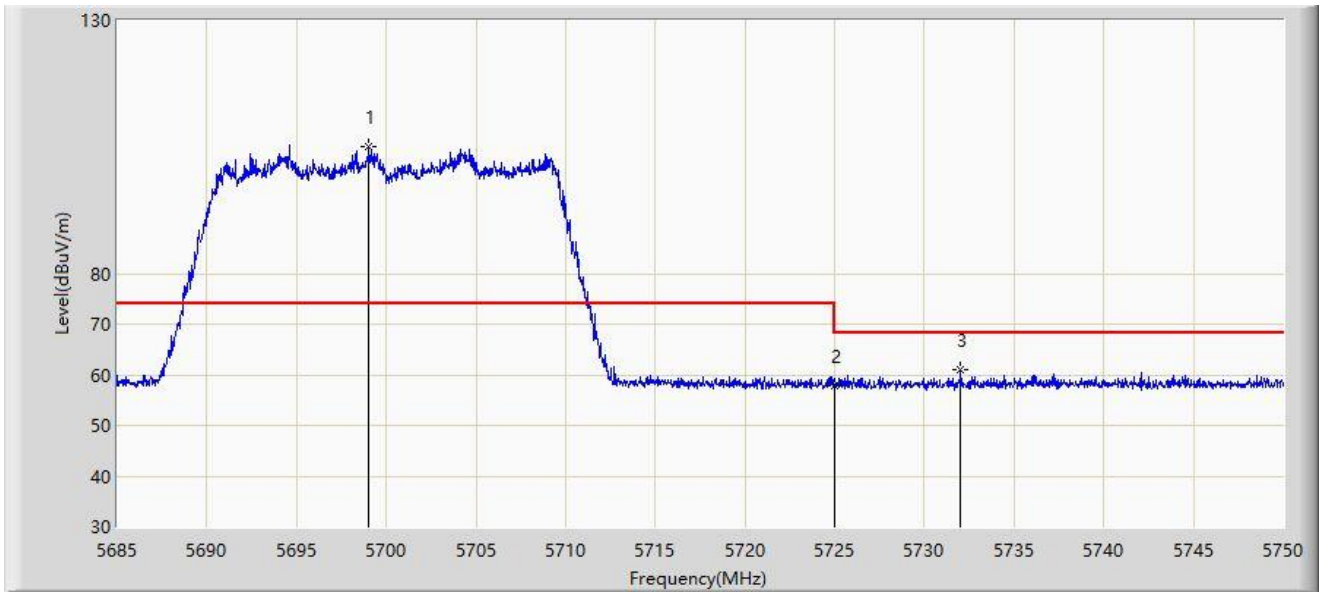


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5699.007	105.154	101.237	N/A	N/A	3.917	PK
2		5725.000	57.719	53.776	-10.481	68.200	3.943	PK
3	*	5732.027	60.970	56.949	-7.230	68.200	4.021	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

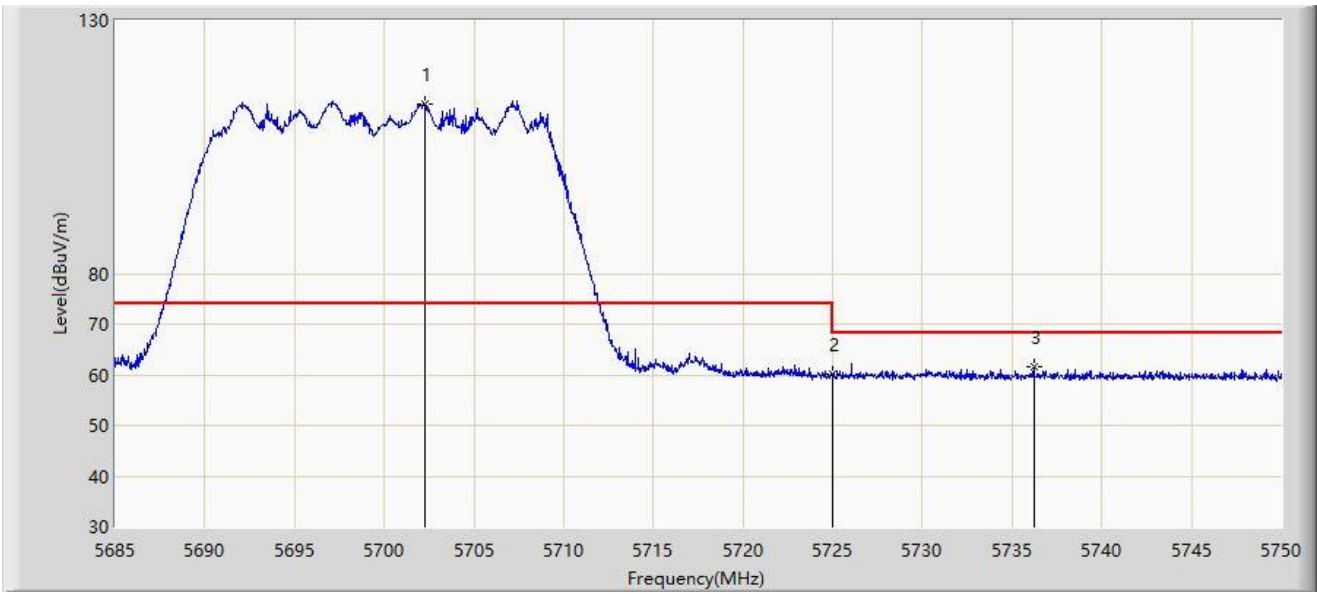


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5702.257	113.517	109.606	N/A	N/A	3.911	PK
2		5725.000	60.036	56.093	-8.164	68.200	3.943	PK
3	*	5736.220	61.577	57.503	-6.623	68.200	4.075	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

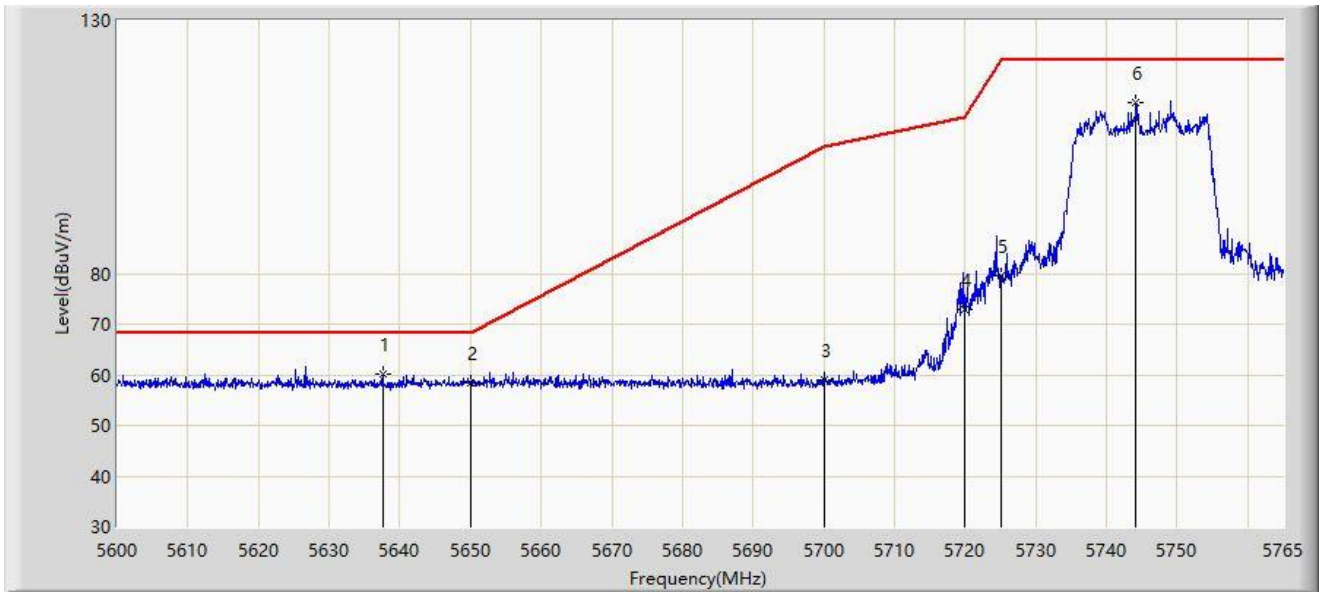


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5637.538	60.249	56.587	-7.951	68.200	3.662	PK
2		5650.000	58.332	54.418	-9.868	68.200	3.914	PK
3		5700.000	59.119	55.204	-46.081	105.200	3.916	PK
4		5720.000	72.879	68.950	-37.921	110.800	3.929	PK
5		5725.000	79.590	75.647	-42.610	122.200	3.943	PK
6		5744.210	113.859	109.696	N/A	N/A	4.162	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

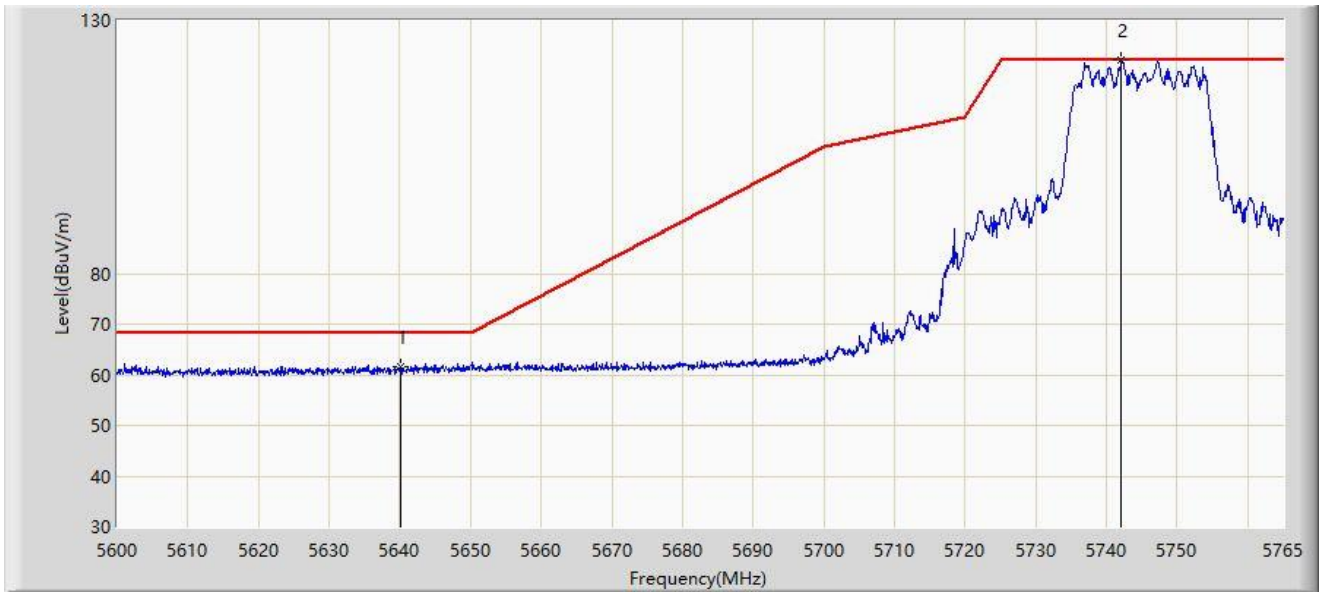


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5640.178	61.717	58.021	-6.483	68.200	3.696	PK
2		5742.065	122.149	118.001	N/A	N/A	4.148	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

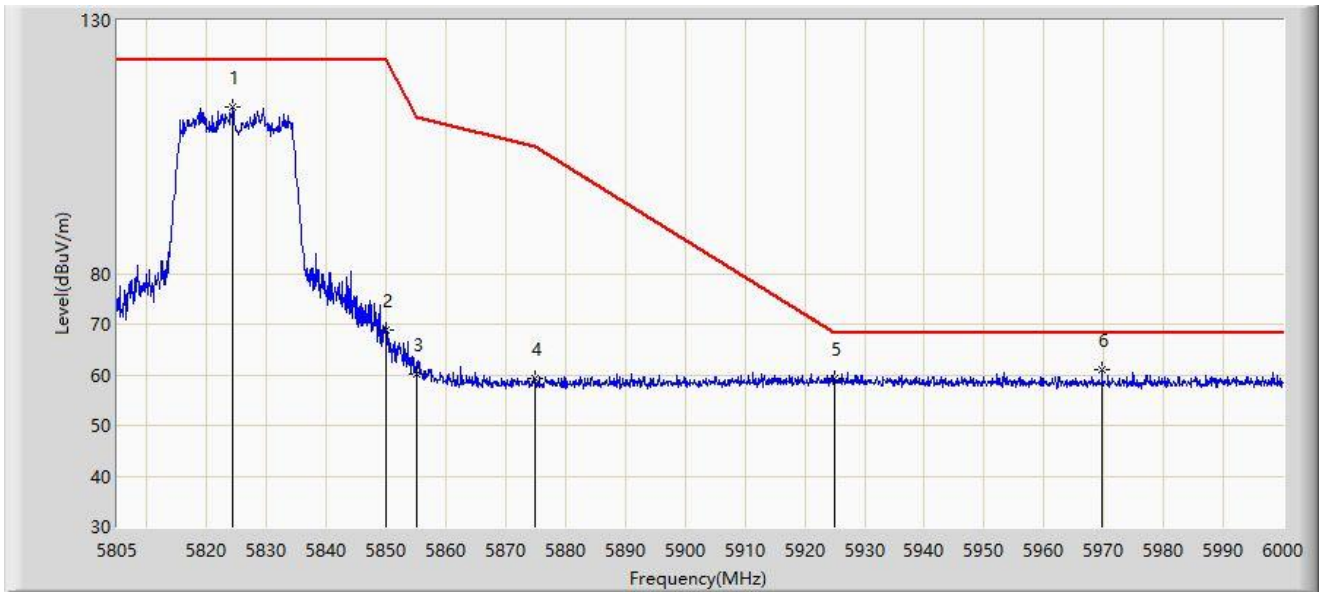

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5824.305	112.862	108.458	N/A	N/A	4.405	PK
2		5850.000	68.803	64.359	-53.397	122.200	4.444	PK
3		5855.000	60.231	55.831	-50.569	110.800	4.400	PK
4		5875.000	59.169	54.858	-46.031	105.200	4.312	PK
5		5925.000	59.316	54.685	-8.884	68.200	4.630	PK
6	*	5969.678	60.959	56.509	-7.241	68.200	4.450	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

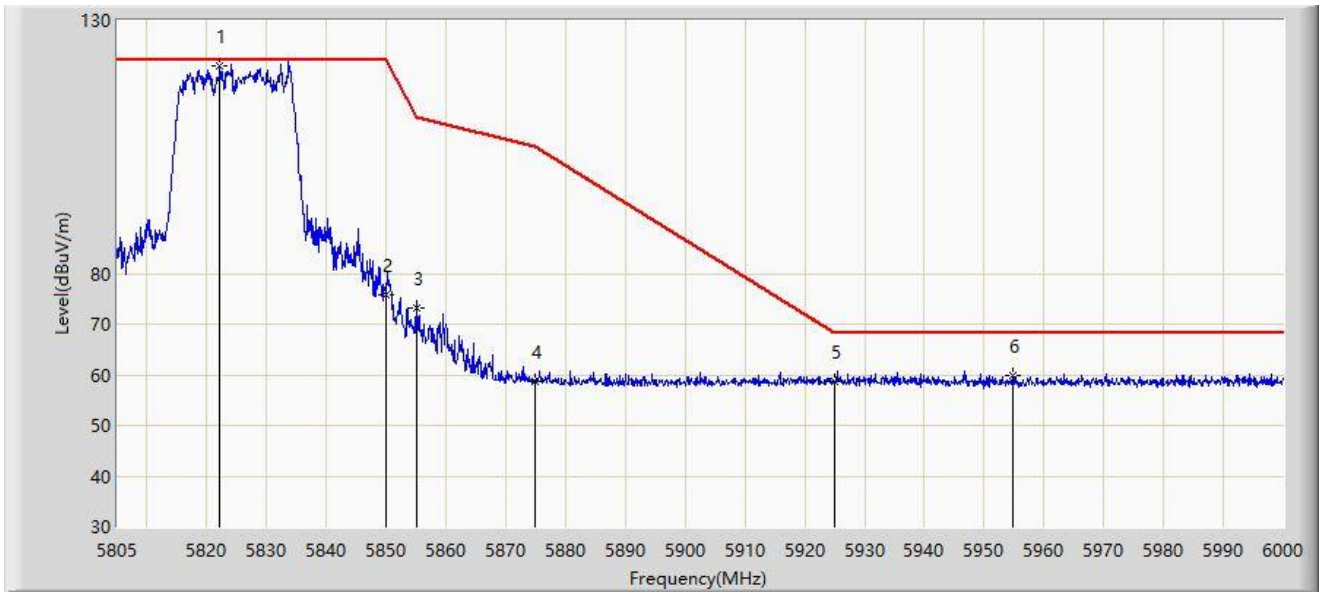


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5822.160	120.986	116.596	N/A	N/A	4.389	PK
2		5850.000	75.793	71.349	-46.407	122.200	4.444	PK
3		5855.000	73.158	68.758	-37.642	110.800	4.400	PK
4		5875.000	58.760	54.449	-46.440	105.200	4.312	PK
5		5925.000	58.609	53.978	-9.591	68.200	4.630	PK
6	*	5954.857	59.974	55.489	-8.226	68.200	4.485	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

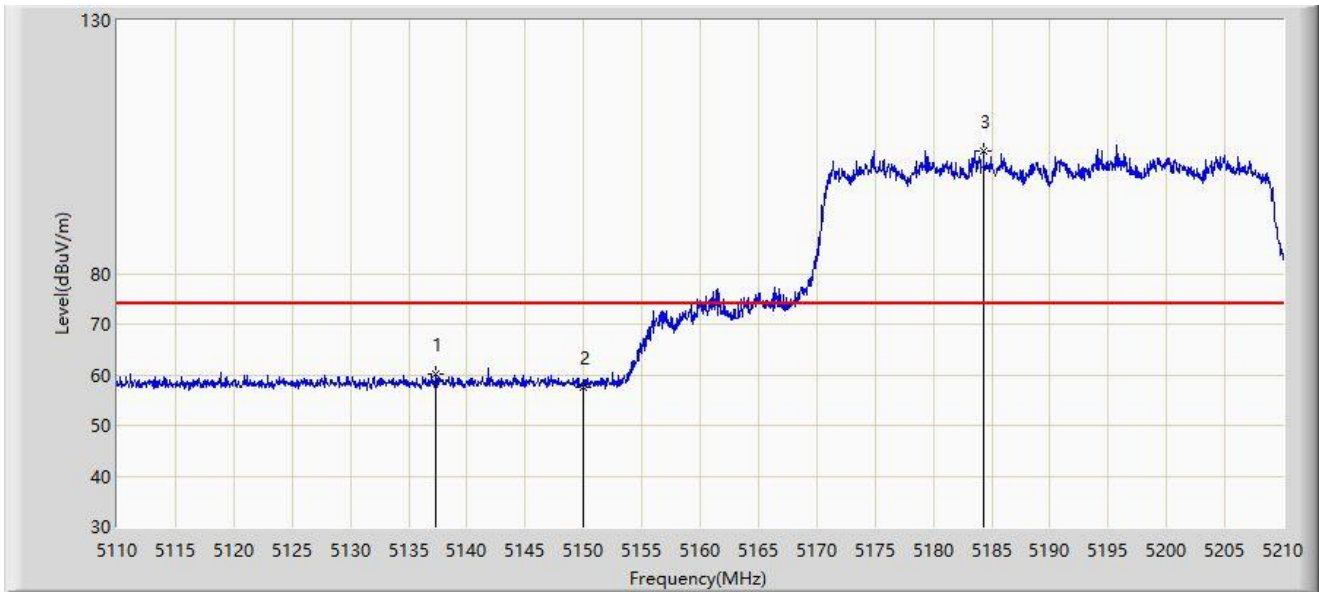


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5137.350	60.032	56.415	-13.968	74.000	3.617	PK
2		5150.000	57.566	53.925	-16.434	74.000	3.641	PK
3		5184.300	104.283	100.941	N/A	N/A	3.342	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

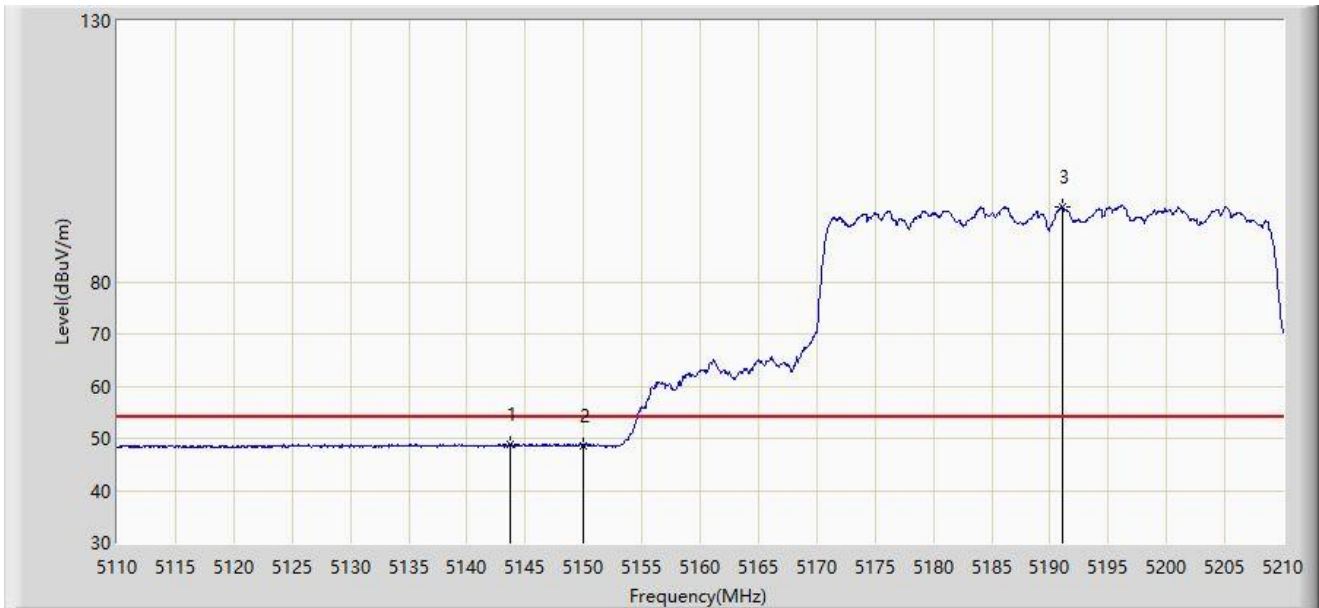


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5143.650	48.820	45.184	-5.180	54.000	3.637	PK
2		5150.000	48.694	45.053	-5.306	54.000	3.641	PK
3		5191.100	94.465	91.132	N/A	N/A	3.333	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

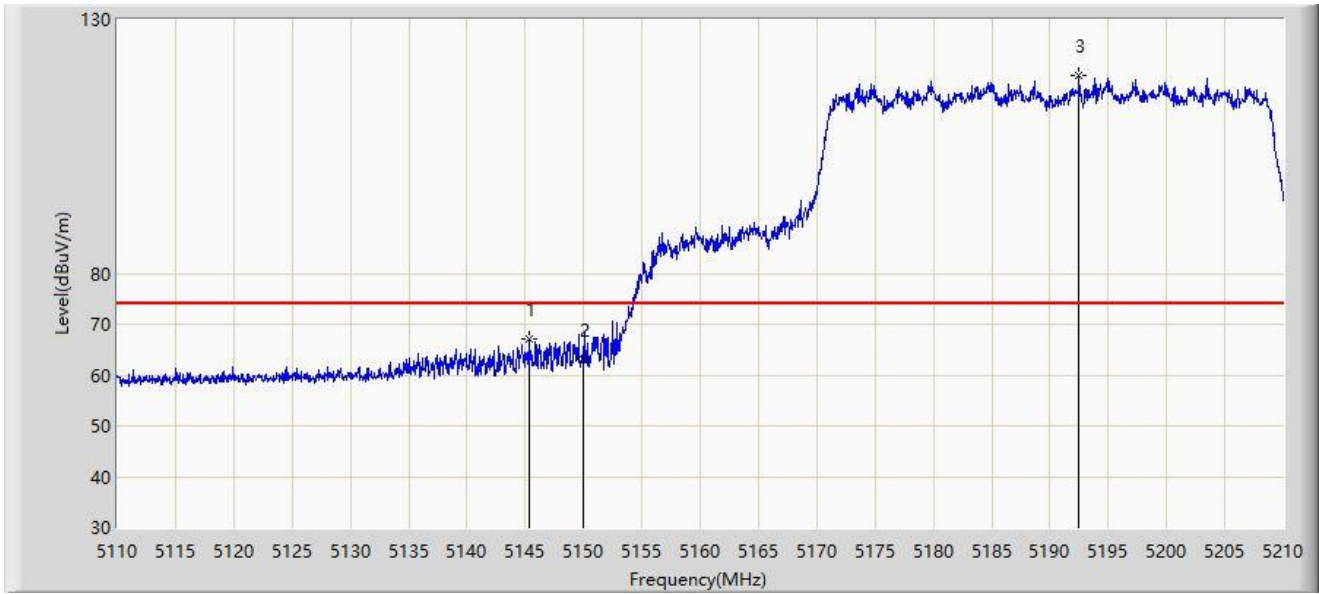


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5145.350	67.007	63.366	-6.993	74.000	3.641	PK
2		5150.000	62.926	59.285	-11.074	74.000	3.641	PK
3		5192.450	118.914	115.589	N/A	N/A	3.326	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

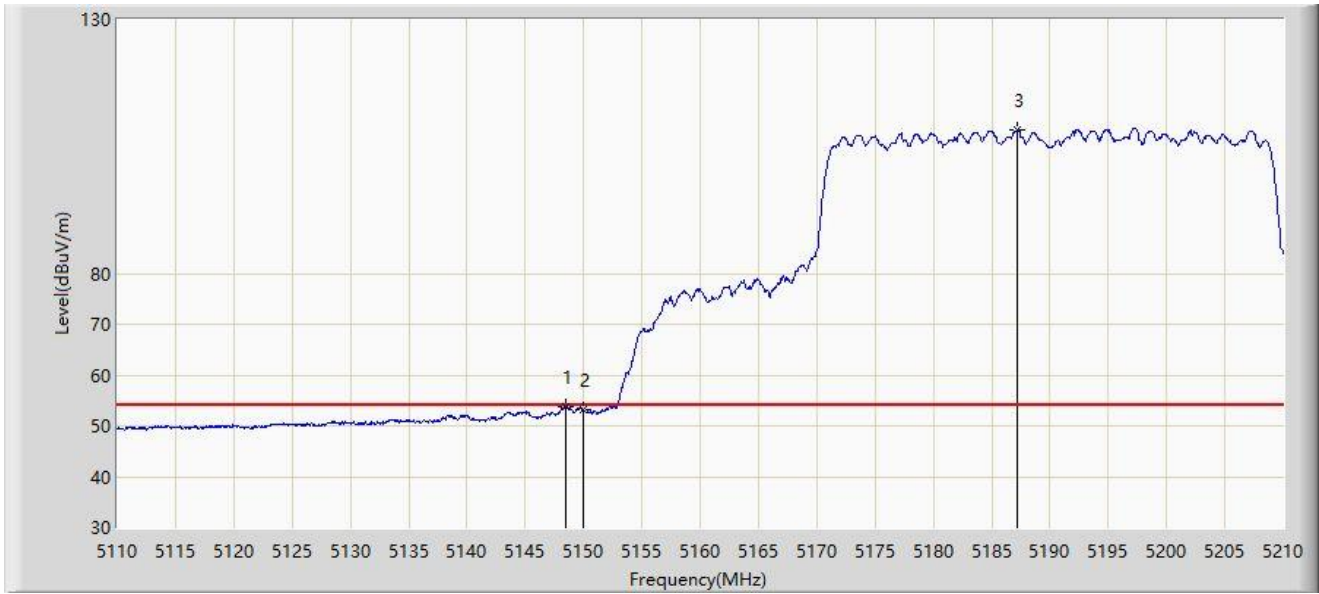


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.450	53.788	50.141	-0.212	54.000	3.648	AV
2		5150.000	53.145	49.504	-0.855	54.000	3.641	AV
3		5187.200	108.229	104.874	N/A	N/A	3.355	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

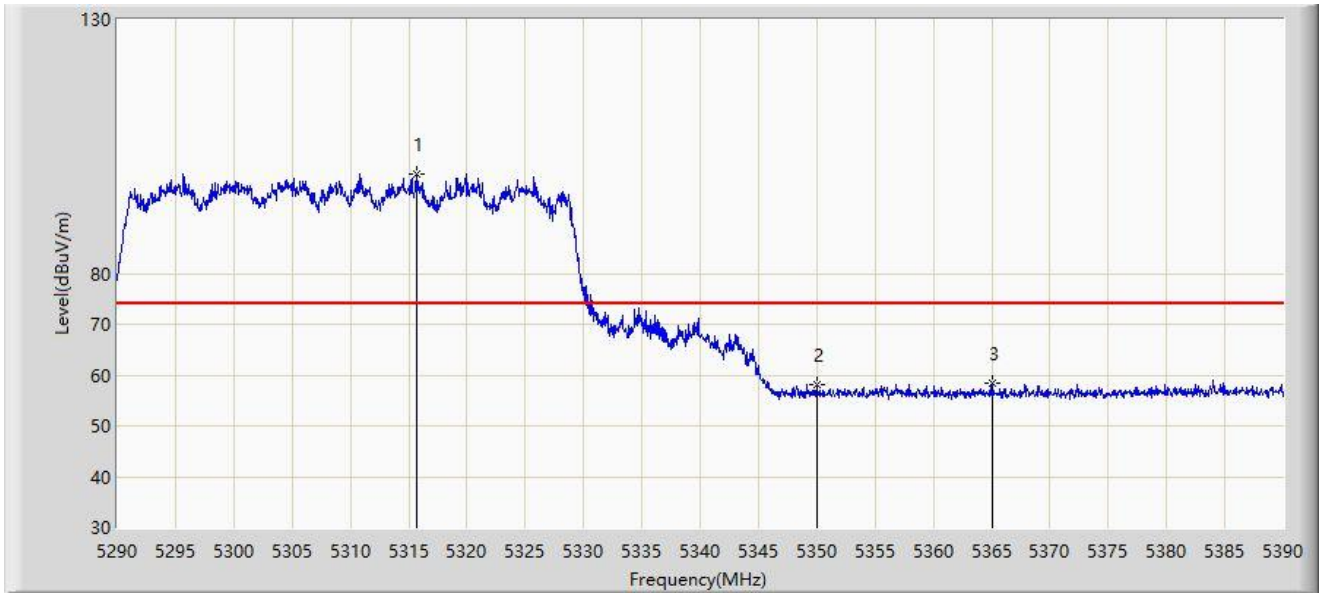


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5315.750	99.594	96.223	N/A	N/A	3.370	PK
2		5350.000	57.982	54.637	-16.018	74.000	3.344	PK
3	*	5365.000	58.302	55.029	-15.698	74.000	3.272	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

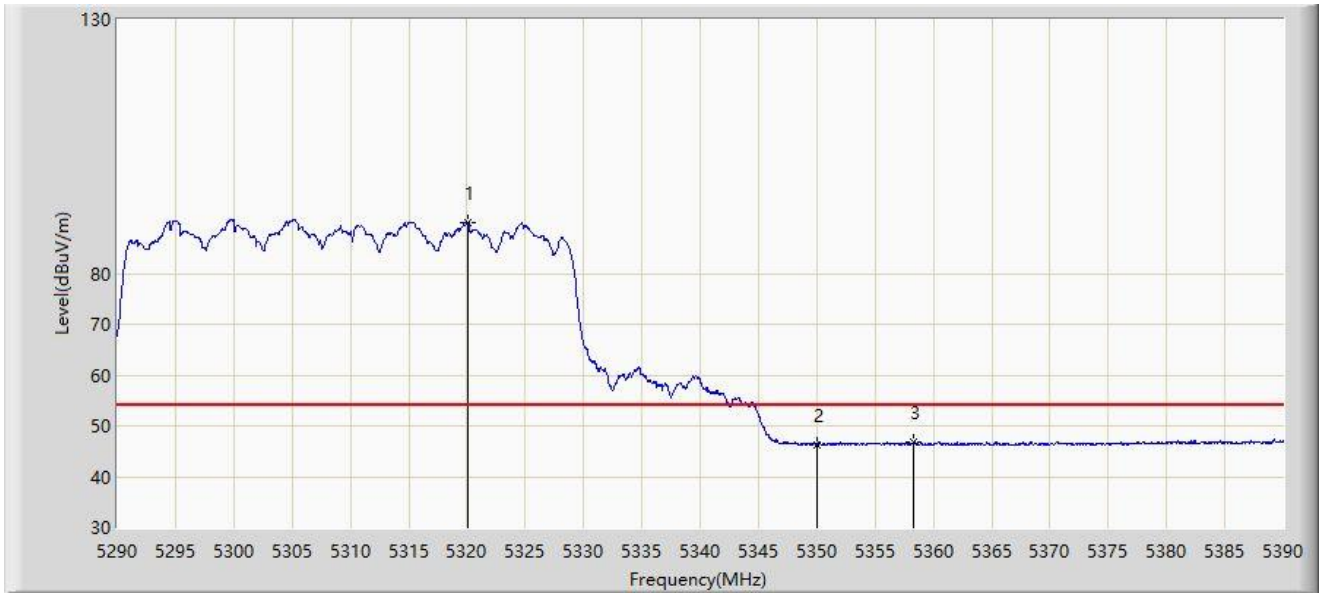


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5320.100	89.863	86.461	N/A	N/A	3.402	AV
2		5350.000	46.360	43.015	-7.640	54.000	3.344	AV
3	*	5358.300	46.679	43.386	-7.321	54.000	3.293	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

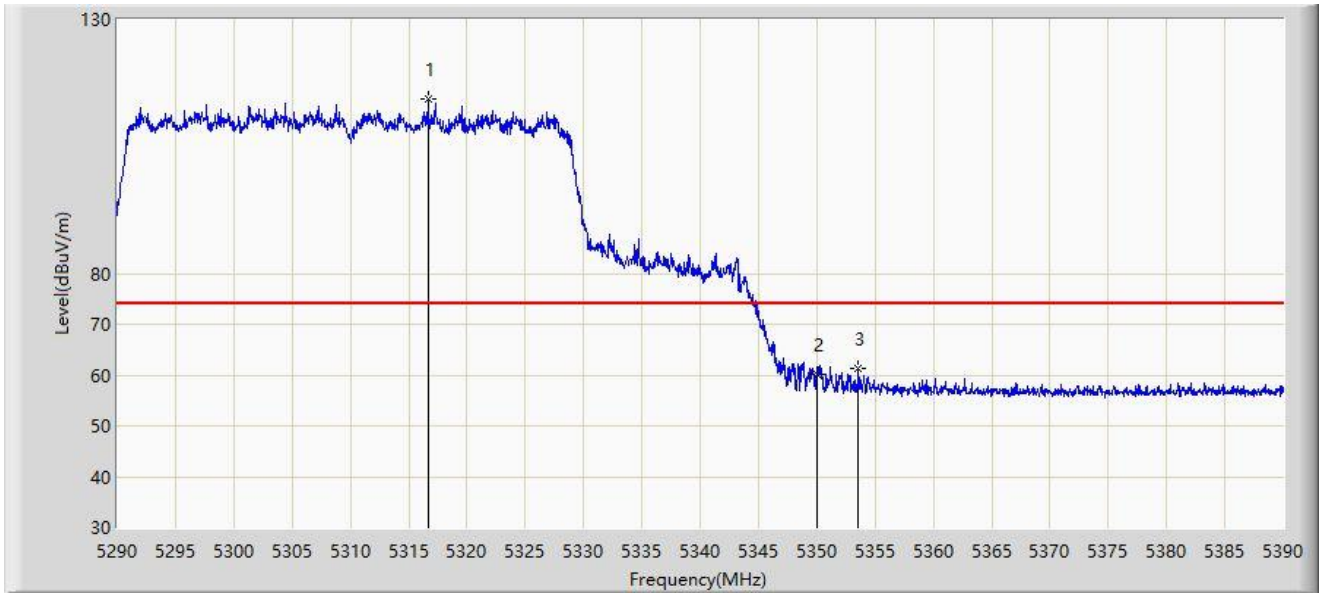

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5316.650	114.454	111.072	N/A	N/A	3.383	PK
2		5350.000	60.111	56.766	-13.889	74.000	3.344	PK
3	*	5353.550	61.303	57.996	-12.697	74.000	3.306	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

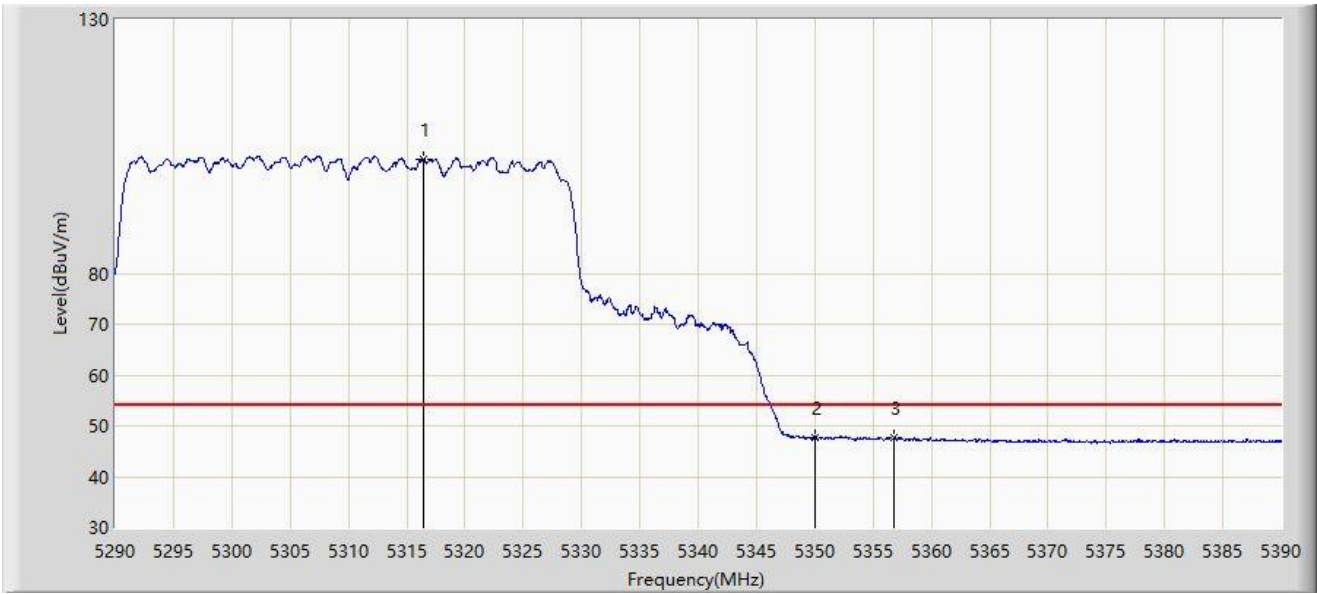


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5316.400	102.526	99.147	N/A	N/A	3.380	AV
2	*	5350.000	47.793	44.448	-6.207	54.000	3.344	AV
3		5356.850	47.613	44.316	-6.387	54.000	3.297	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

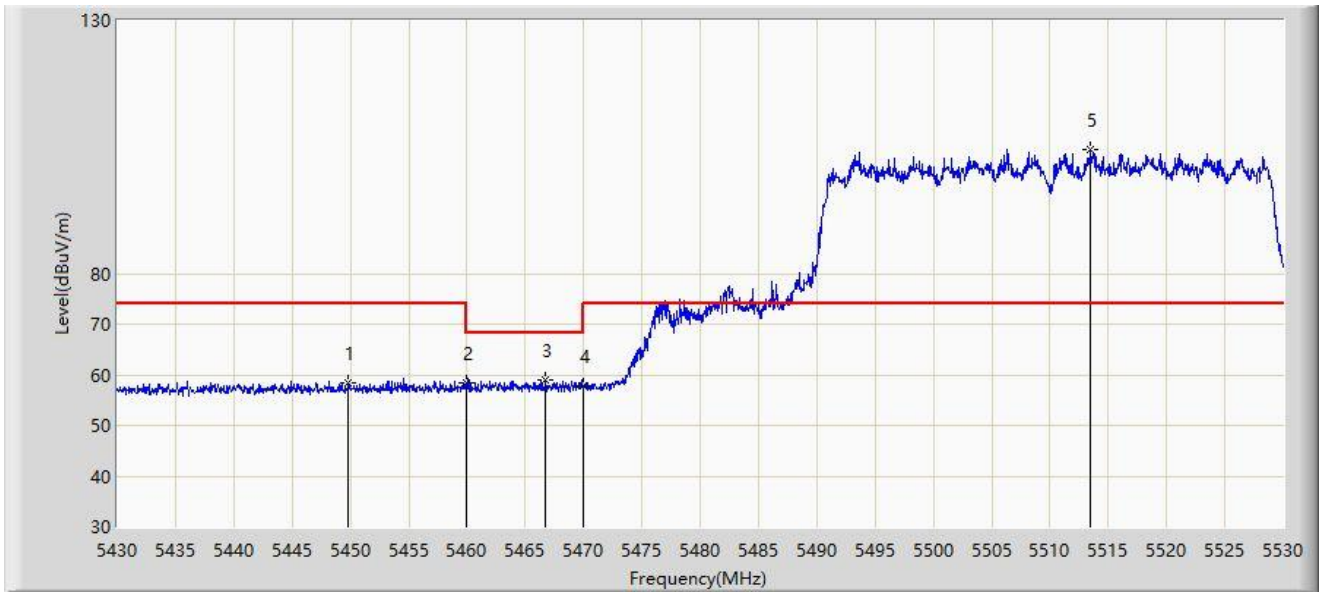


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5449.850	58.402	54.849	-15.598	74.000	3.553	PK
2		5460.000	58.296	54.666	-15.704	74.000	3.630	PK
3	*	5466.750	59.047	55.376	-9.153	68.200	3.672	PK
4		5470.000	57.910	54.219	-10.290	68.200	3.691	PK
5		5513.500	104.426	100.671	N/A	N/A	3.754	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

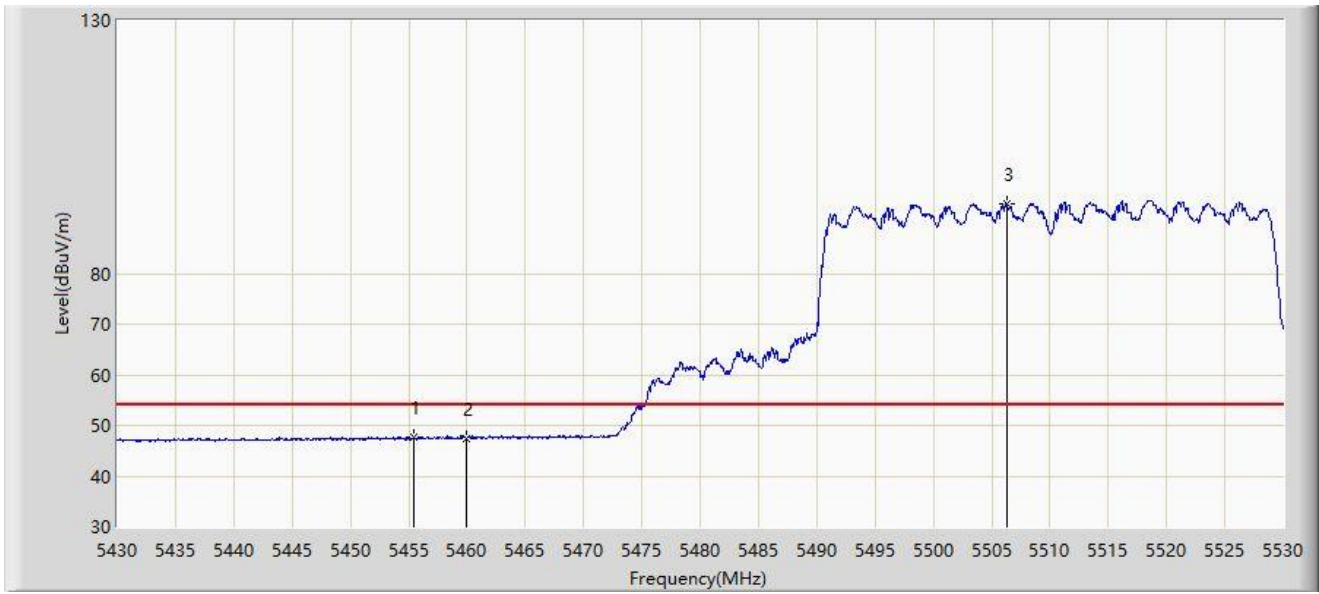


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5455.450	47.571	43.987	-6.429	54.000	3.584	AV
2		5460.000	47.528	43.898	-6.472	54.000	3.630	AV
3		5506.300	93.837	90.010	N/A	N/A	3.827	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

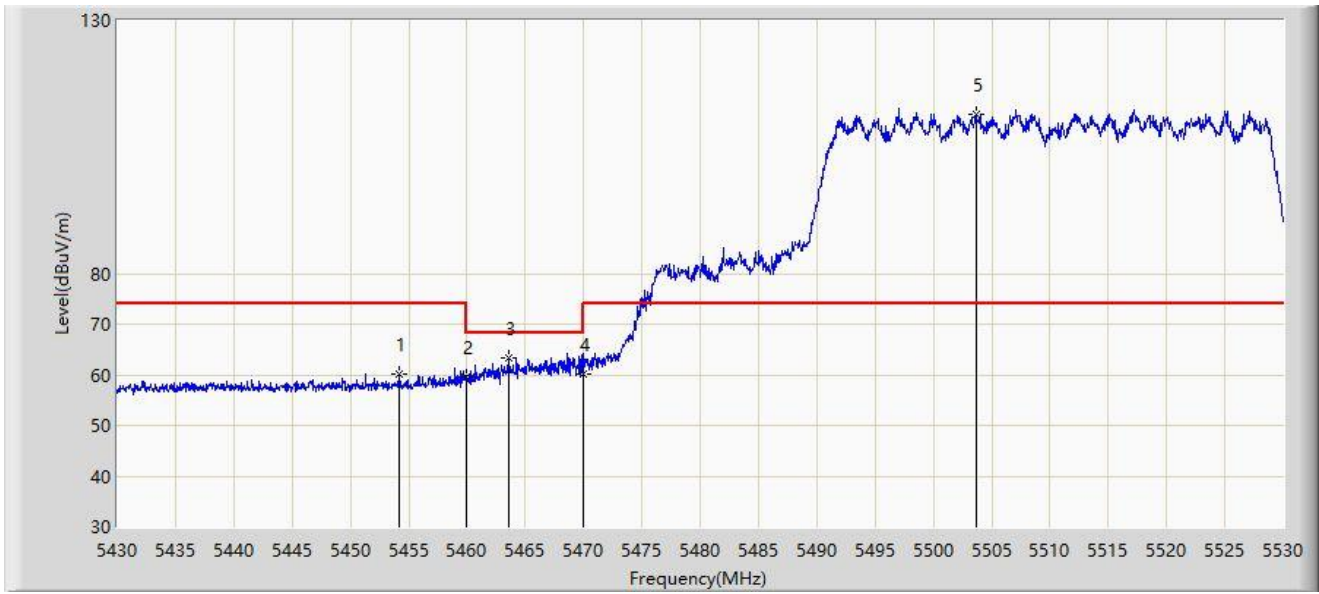


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.200	60.182	56.620	-13.818	74.000	3.562	PK
2		5460.000	59.590	55.960	-14.410	74.000	3.630	PK
3	*	5463.550	63.399	59.747	-4.801	68.200	3.652	PK
4		5470.000	60.133	56.442	-8.067	68.200	3.691	PK
5		5503.650	111.468	107.616	N/A	N/A	3.851	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

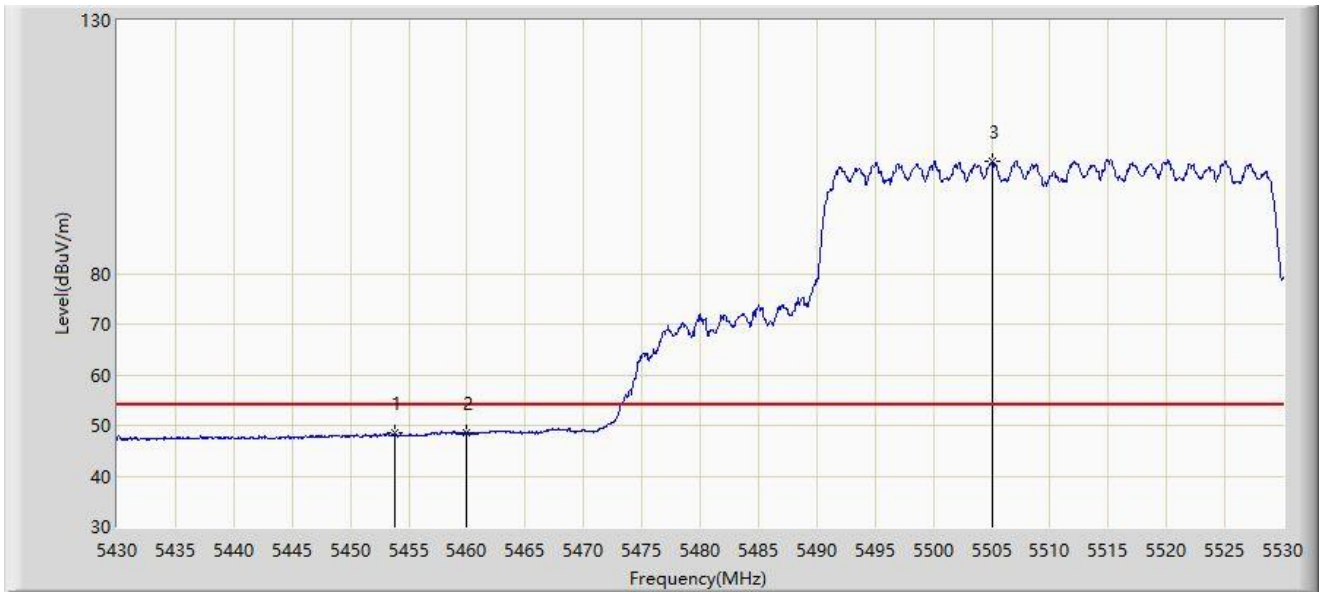


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5453.850	48.493	44.935	-5.507	54.000	3.558	AV
2	*	5460.000	48.644	45.014	-5.356	54.000	3.630	AV
3		5505.050	102.277	98.438	N/A	N/A	3.838	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

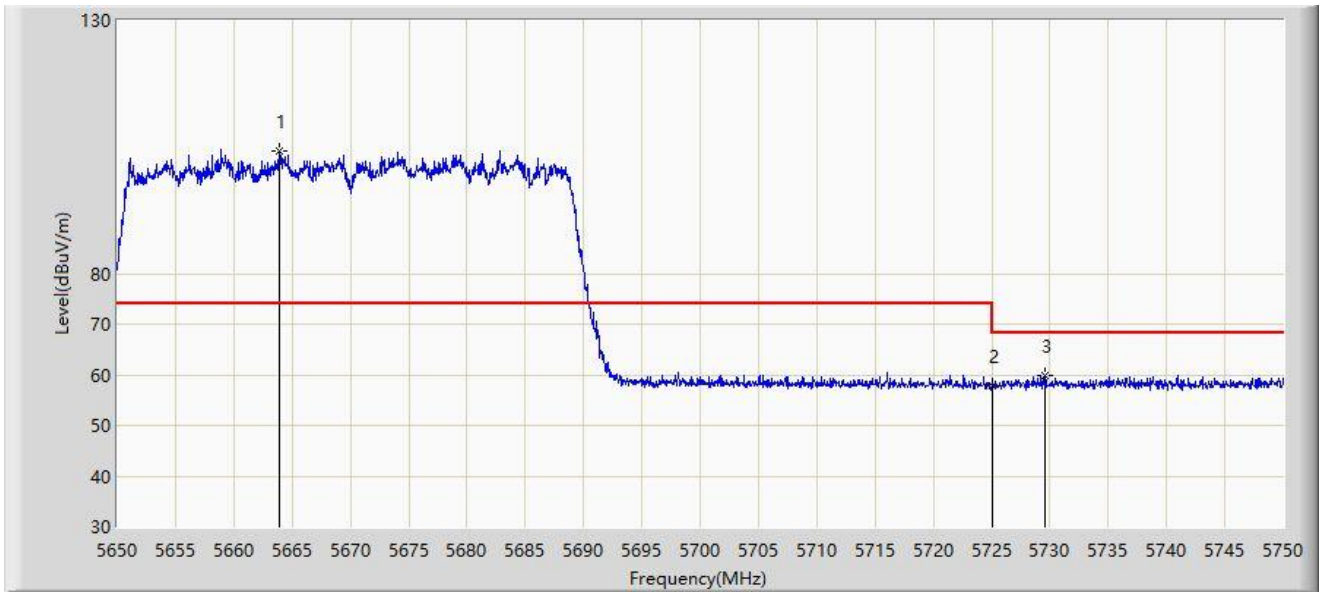


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5663.850	104.185	100.192	N/A	N/A	3.993	PK
2		5725.000	57.888	53.945	-10.312	68.200	3.943	PK
3	*	5729.600	59.781	55.791	-8.419	68.200	3.990	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

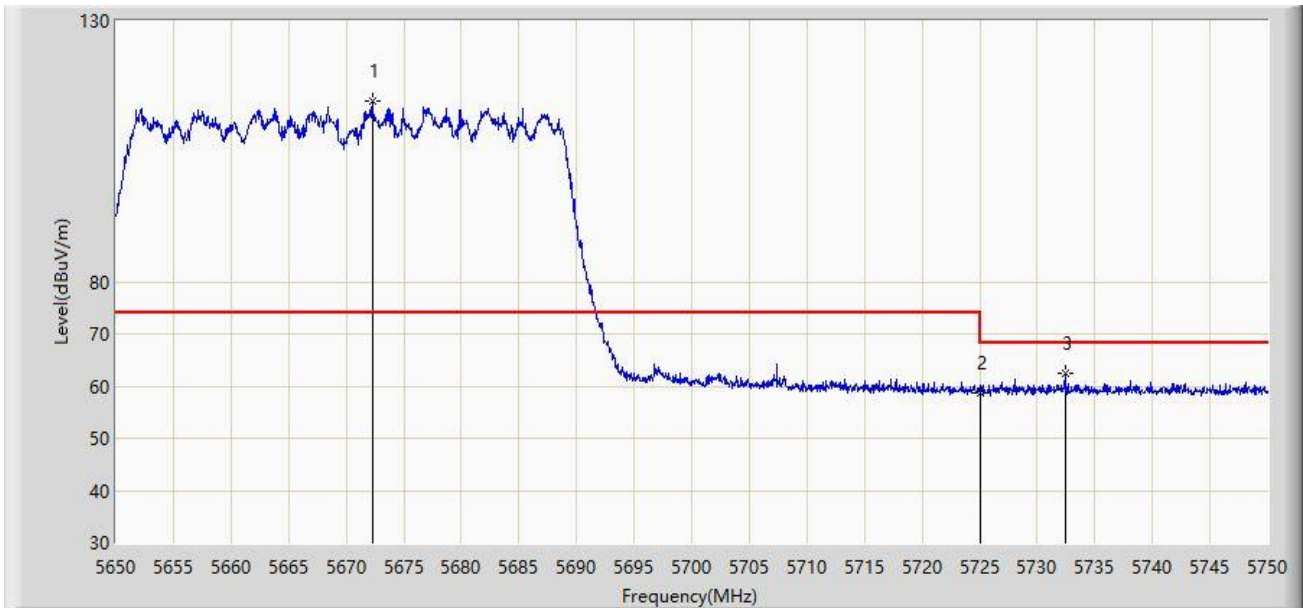


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5672.250	114.707	110.768	N/A	N/A	3.939	PK
2		5725.000	58.634	54.691	-9.566	68.200	3.943	PK
3	*	5732.400	62.325	58.299	-5.875	68.200	4.025	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

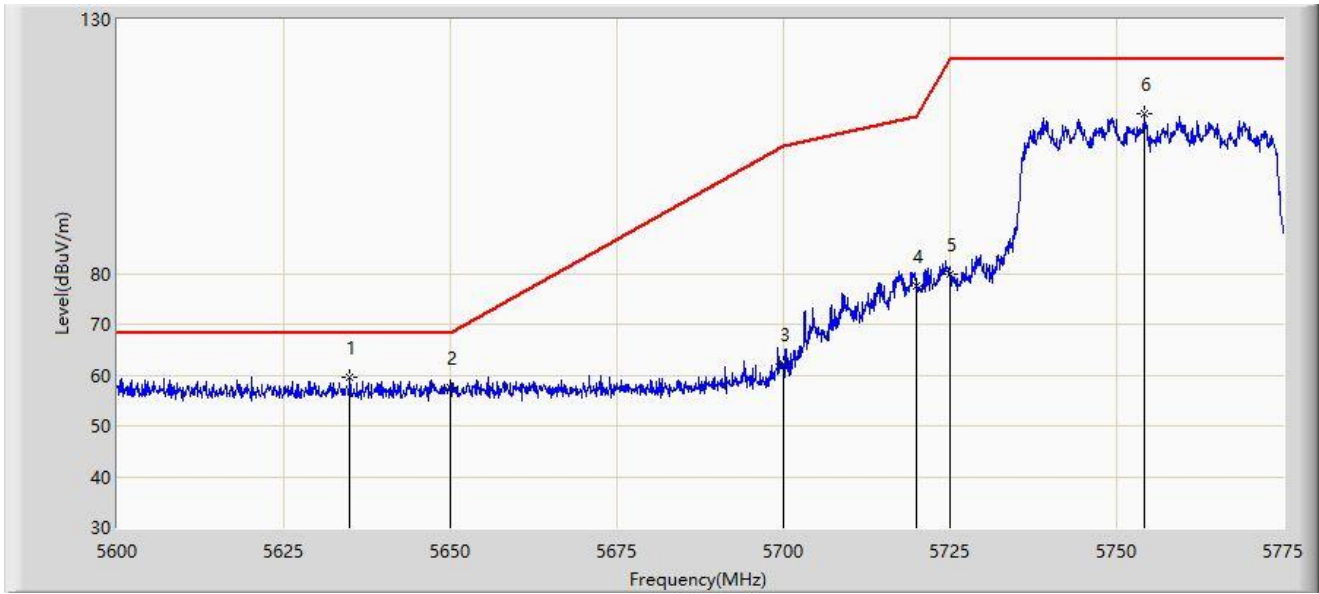

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5634.913	59.435	55.780	-8.765	68.200	3.654	PK
2		5650.000	57.395	53.481	-10.805	68.200	3.914	PK
3		5700.000	62.100	58.185	-43.100	105.200	3.916	PK
4		5720.000	77.477	73.548	-33.323	110.800	3.929	PK
5		5725.000	79.746	75.803	-42.454	122.200	3.943	PK
6		5754.263	111.335	107.126	N/A	N/A	4.210	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

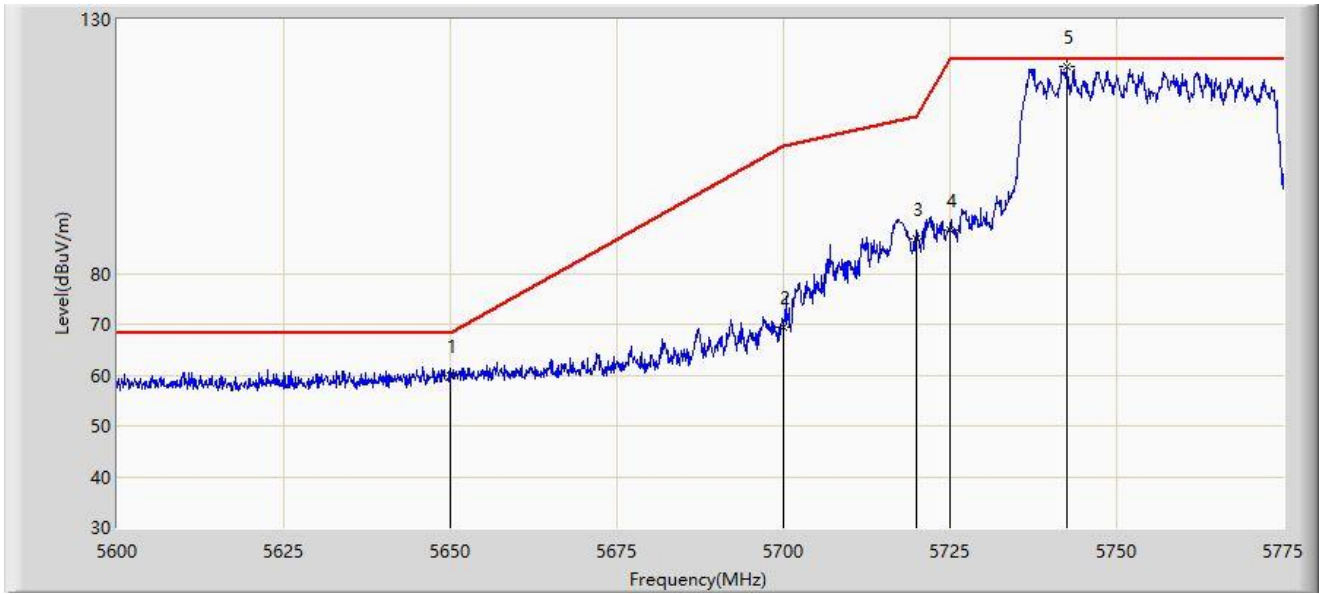


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5650.000	59.891	55.977	-8.309	68.200	3.914	PK
2		5700.000	69.394	65.479	-35.806	105.200	3.916	PK
3		5720.000	86.776	82.847	-24.024	110.800	3.929	PK
4		5725.000	88.549	84.606	-33.651	122.200	3.943	PK
5		5742.450	120.766	116.613	N/A	N/A	4.154	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

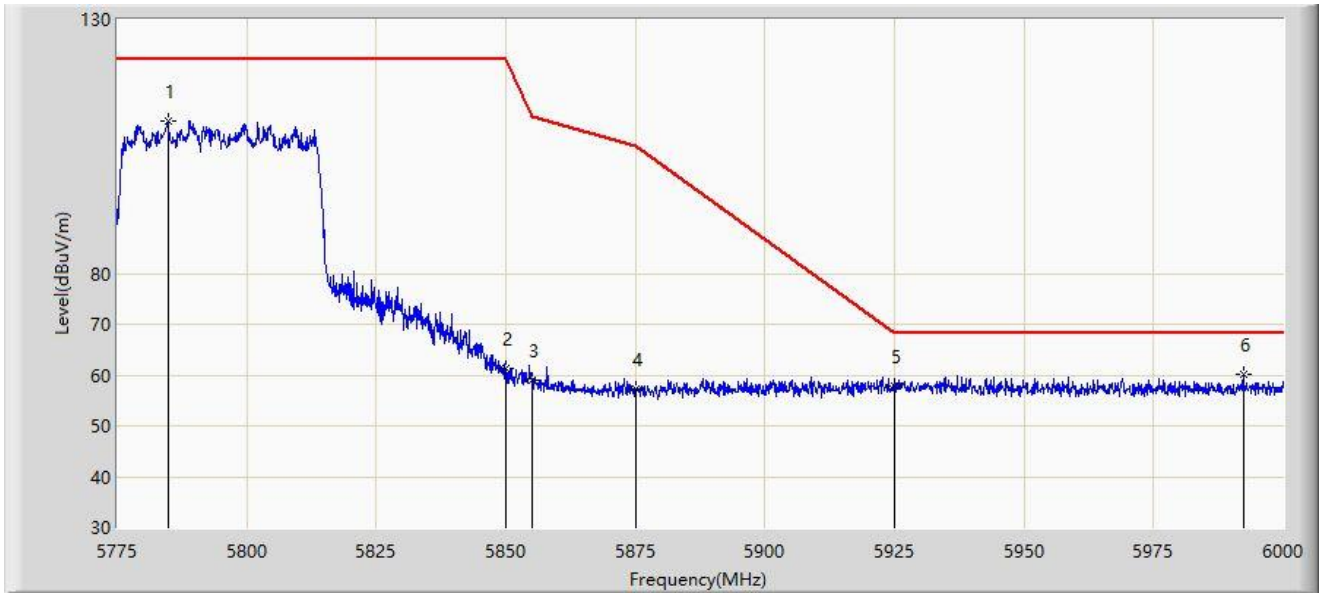


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5784.788	110.050	105.850	N/A	N/A	4.200	PK
2		5850.000	61.387	56.943	-60.813	122.200	4.444	PK
3		5855.000	58.861	54.461	-51.939	110.800	4.400	PK
4		5875.000	57.145	52.834	-48.055	105.200	4.312	PK
5		5925.000	57.808	53.177	-10.392	68.200	4.630	PK
6	*	5992.350	60.213	55.588	-7.987	68.200	4.625	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

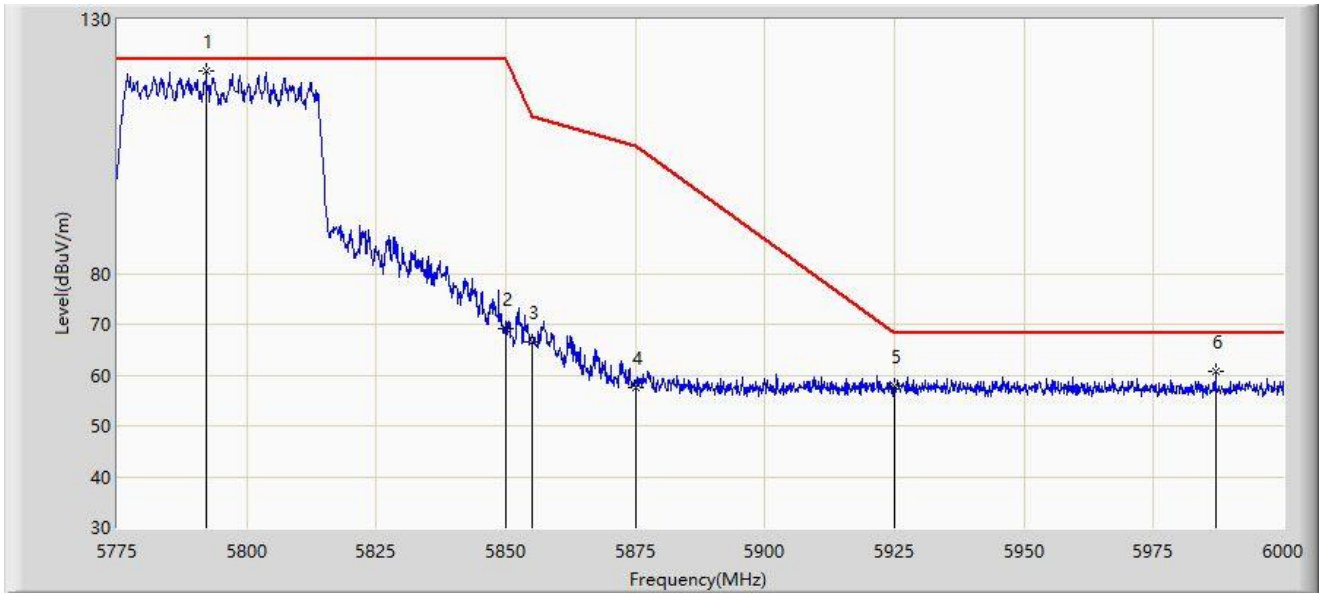


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5792.212	119.873	115.606	N/A	N/A	4.267	PK
2		5850.000	69.048	64.604	-53.152	122.200	4.444	PK
3		5855.000	66.468	62.068	-44.332	110.800	4.400	PK
4		5875.000	57.495	53.184	-47.705	105.200	4.312	PK
5		5925.000	57.878	53.247	-10.322	68.200	4.630	PK
6	*	5986.950	60.686	56.114	-7.514	68.200	4.571	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

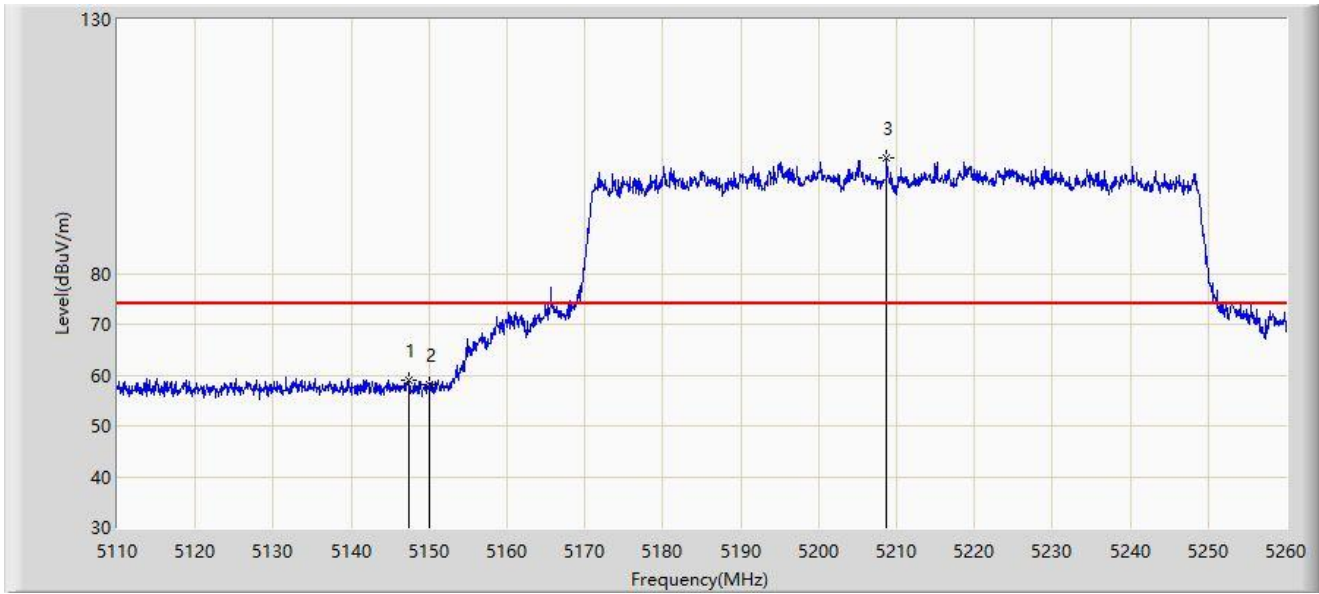


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.425	59.109	55.461	-14.891	74.000	3.648	PK
2		5150.000	58.227	54.586	-15.773	74.000	3.641	PK
3		5208.775	102.613	99.317	N/A	N/A	3.296	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

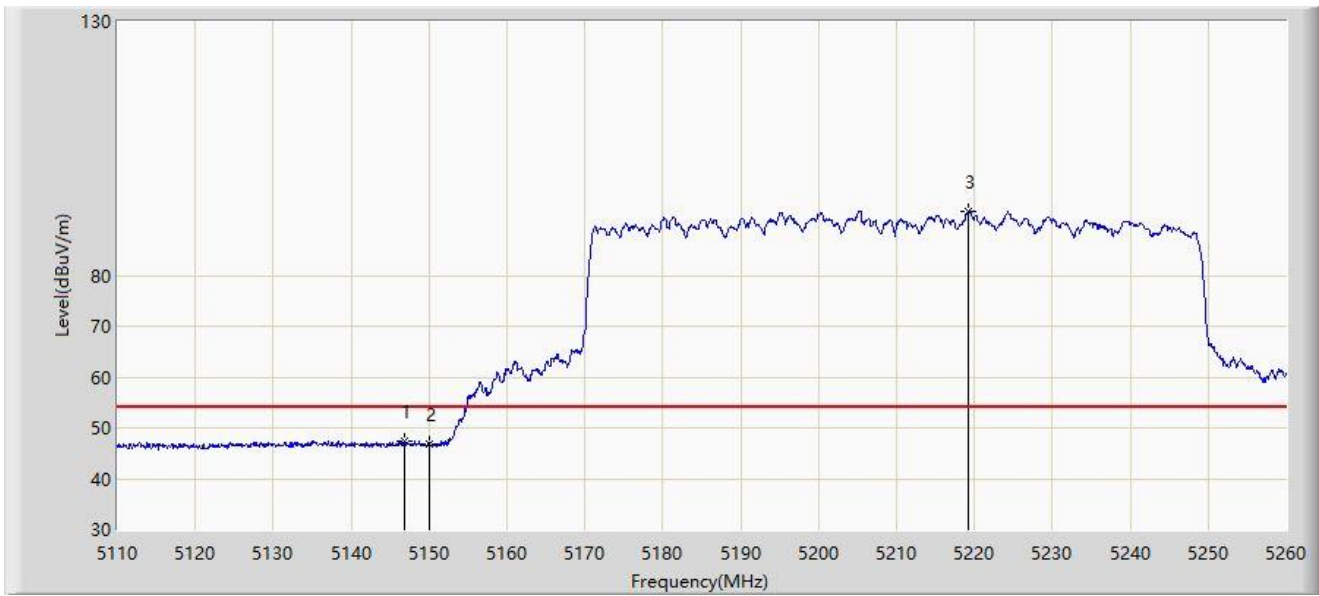


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5146.750	47.327	43.681	-6.673	54.000	3.645	AV
2		5150.000	46.790	43.149	-7.210	54.000	3.641	AV
3		5219.200	92.617	89.306	N/A	N/A	3.311	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

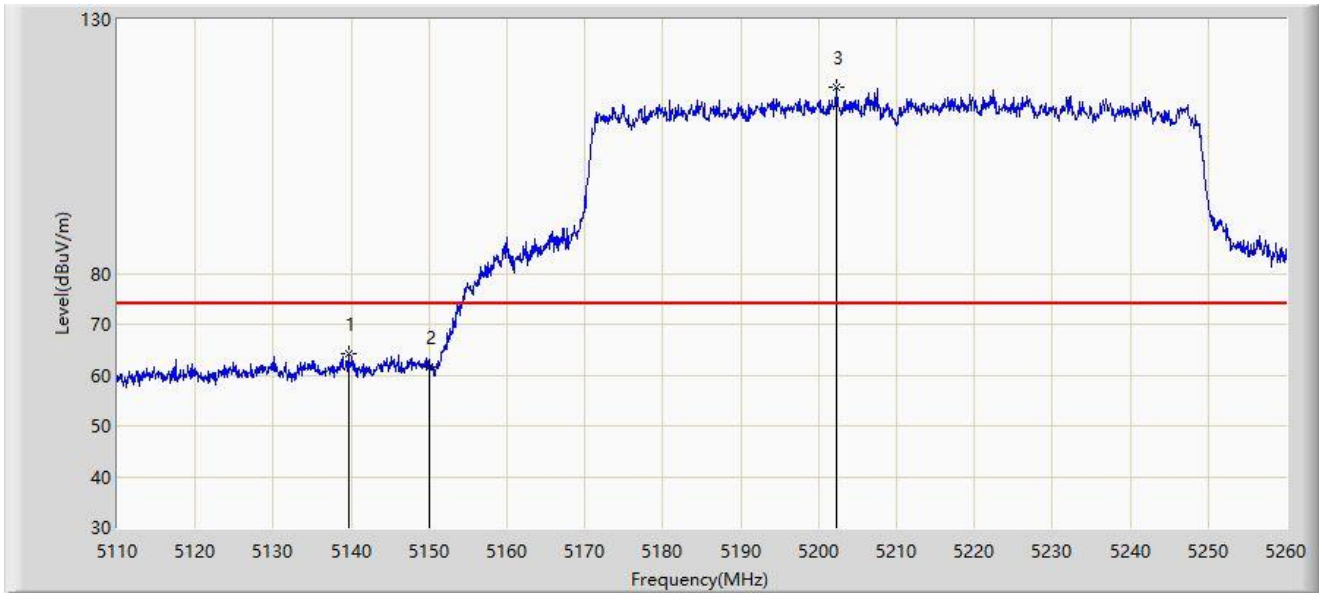


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5139.625	64.142	60.518	-9.858	74.000	3.624	PK
2		5150.000	61.675	58.034	-12.325	74.000	3.641	PK
3		5202.325	116.650	113.362	N/A	N/A	3.289	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

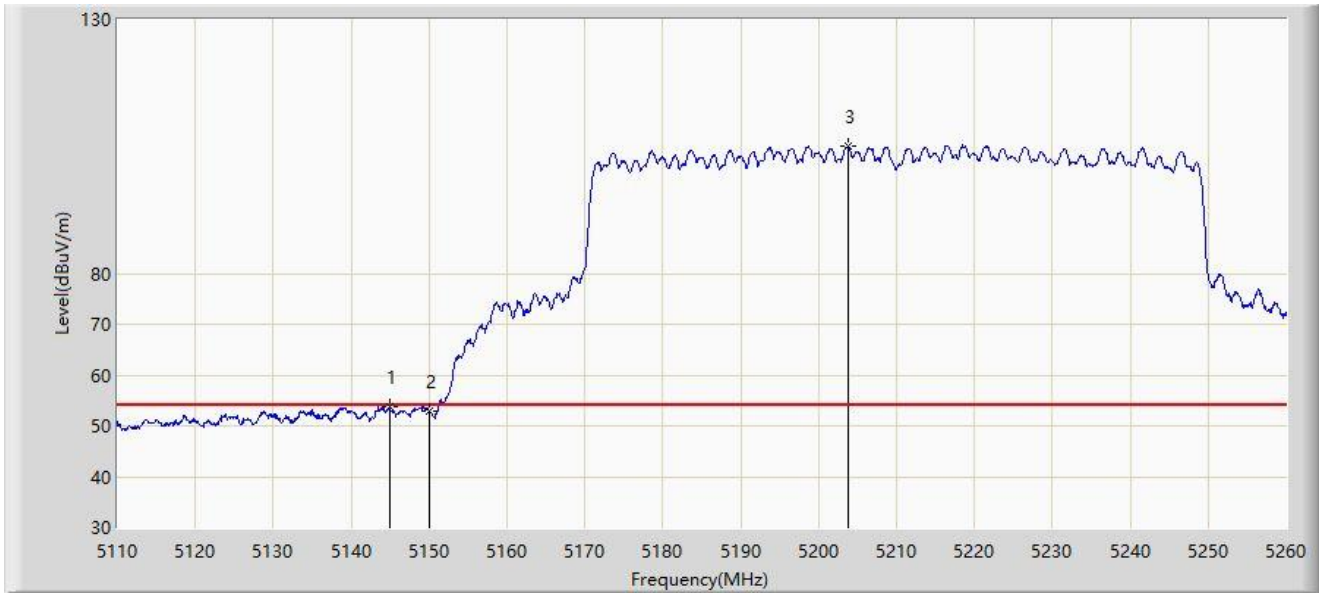


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5144.950	53.846	50.206	-0.154	54.000	3.640	AV
2		5150.000	52.902	49.261	-1.098	54.000	3.641	AV
3		5203.750	105.014	101.725	N/A	N/A	3.290	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

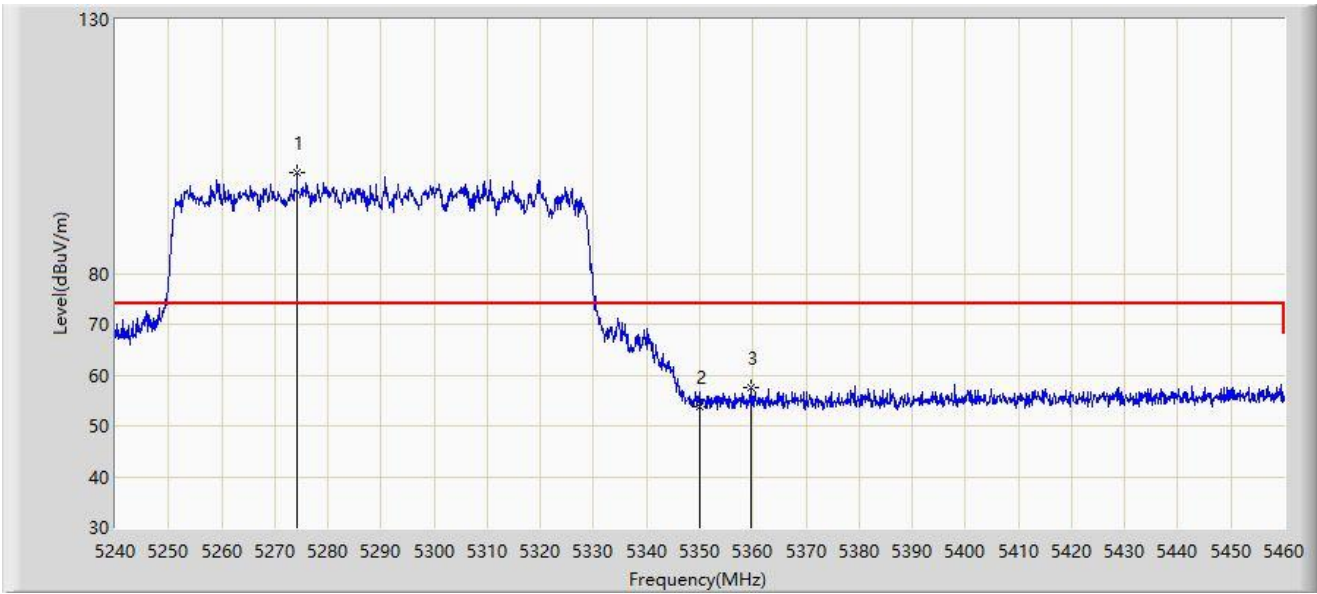

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5274.210	99.726	96.603	N/A	N/A	3.123	PK
2		5350.000	53.874	50.529	-20.126	74.000	3.344	PK
3	*	5359.680	57.468	54.179	-16.532	74.000	3.289	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

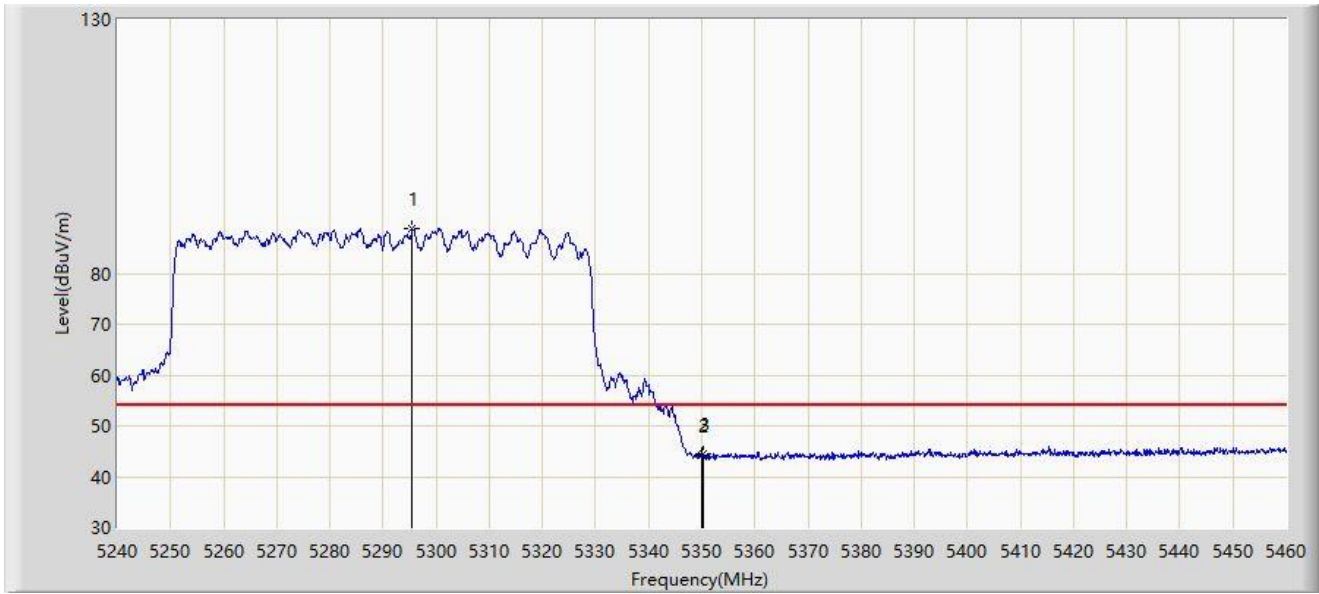


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5295.550	88.884	85.592	N/A	N/A	3.292	AV
2		5350.000	44.323	40.978	-9.677	54.000	3.344	AV
3	*	5350.330	44.387	41.048	-9.613	54.000	3.340	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

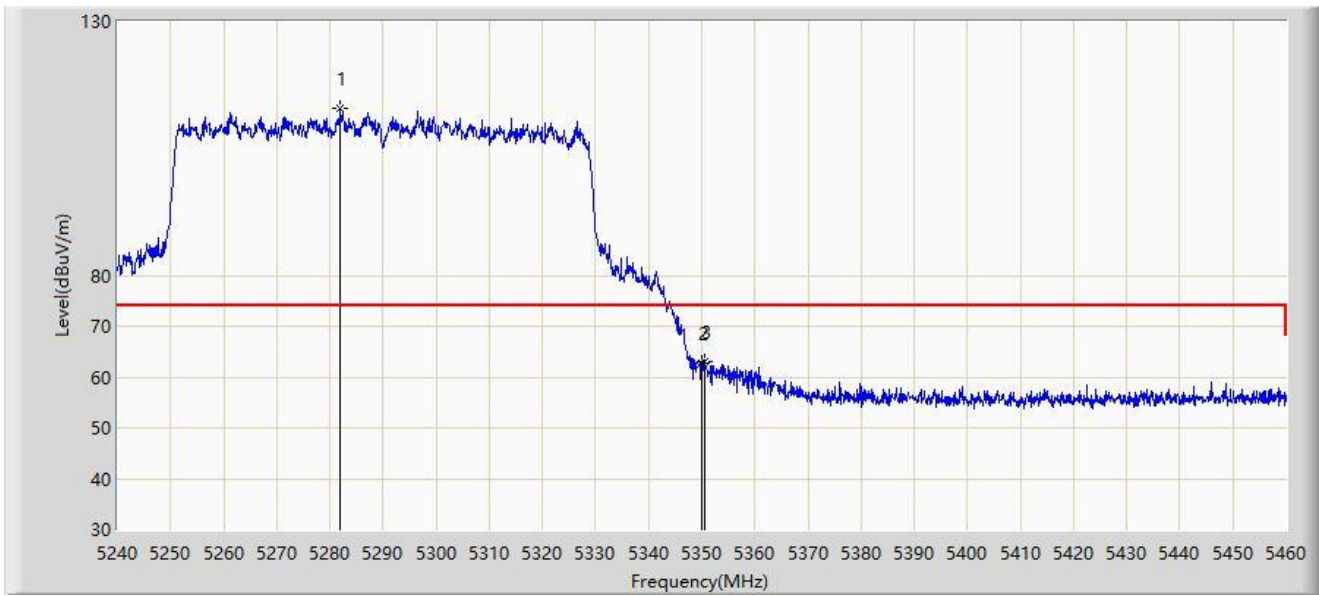


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5282.020	112.829	109.696	N/A	N/A	3.133	PK
2		5350.000	62.767	59.422	-11.233	74.000	3.344	PK
3	*	5350.440	63.056	59.718	-10.944	74.000	3.337	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

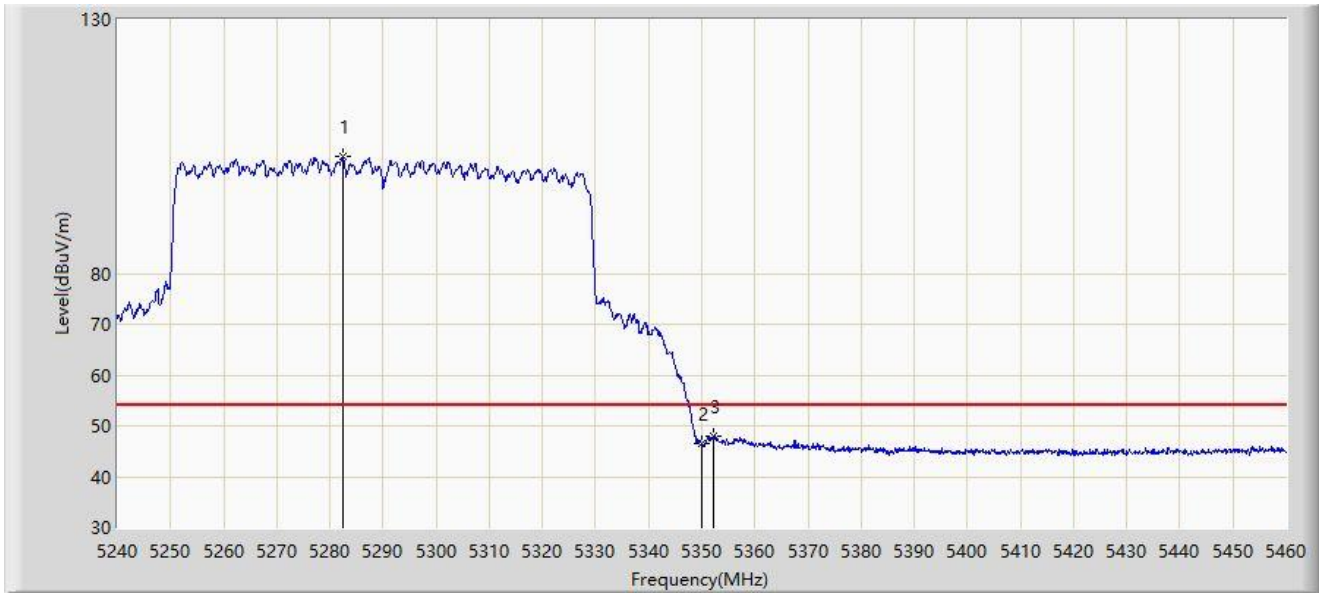


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5282.350	102.940	99.805	N/A	N/A	3.134	AV
2		5350.000	46.645	43.300	-7.355	54.000	3.344	AV
3	*	5352.310	48.056	44.746	-5.944	54.000	3.311	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

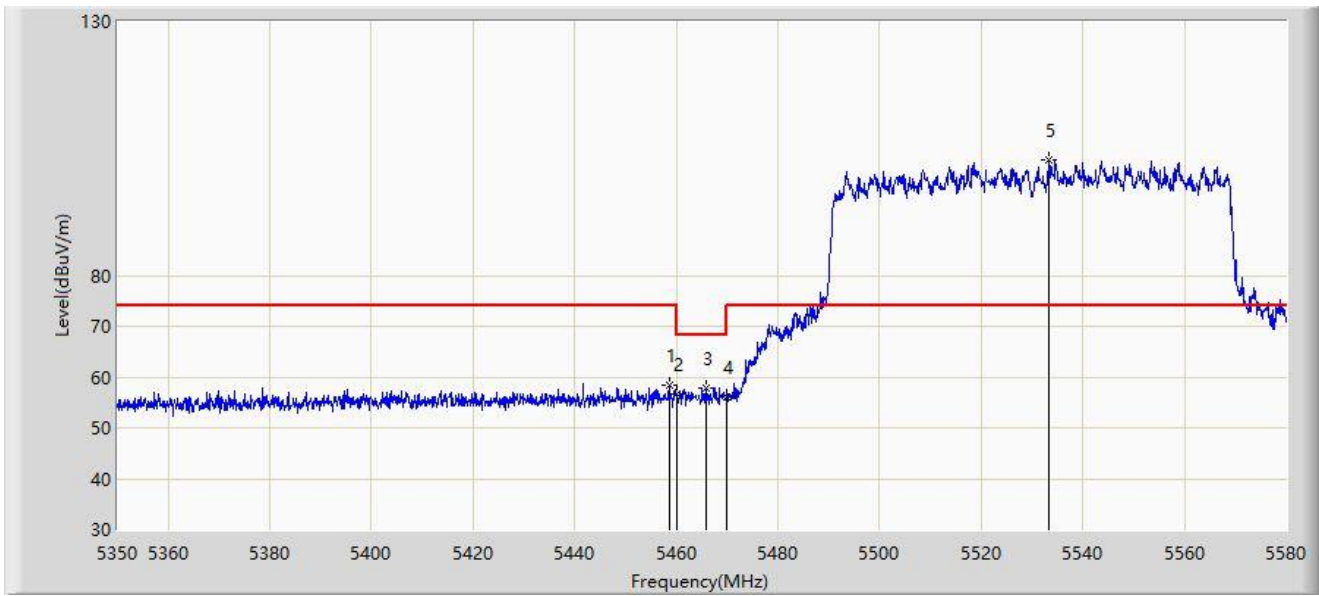


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.560	58.332	54.710	-15.668	74.000	3.621	PK
2		5460.000	56.538	52.908	-17.462	74.000	3.630	PK
3	*	5465.805	57.776	54.110	-10.424	68.200	3.666	PK
4		5470.000	56.110	52.419	-12.090	68.200	3.691	PK
5		5533.310	102.757	99.158	N/A	N/A	3.599	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

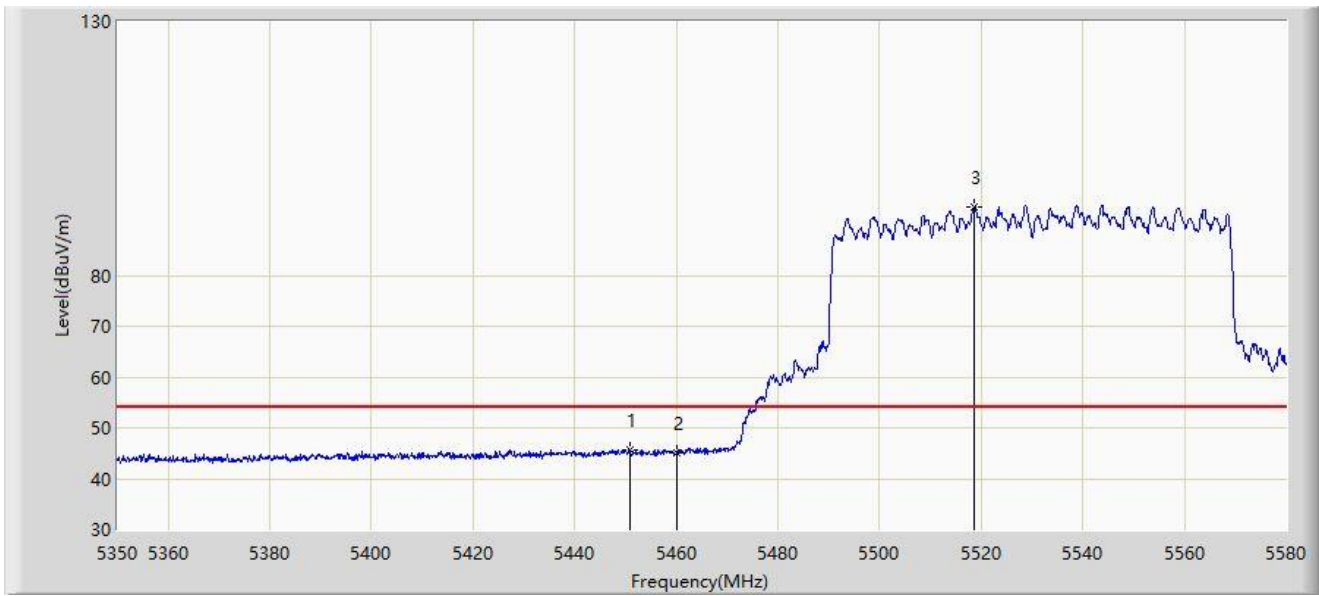


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5450.855	45.796	42.242	-8.204	54.000	3.554	AV
2		5460.000	45.215	41.585	-8.785	54.000	3.630	AV
3		5518.590	93.539	89.841	N/A	N/A	3.698	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

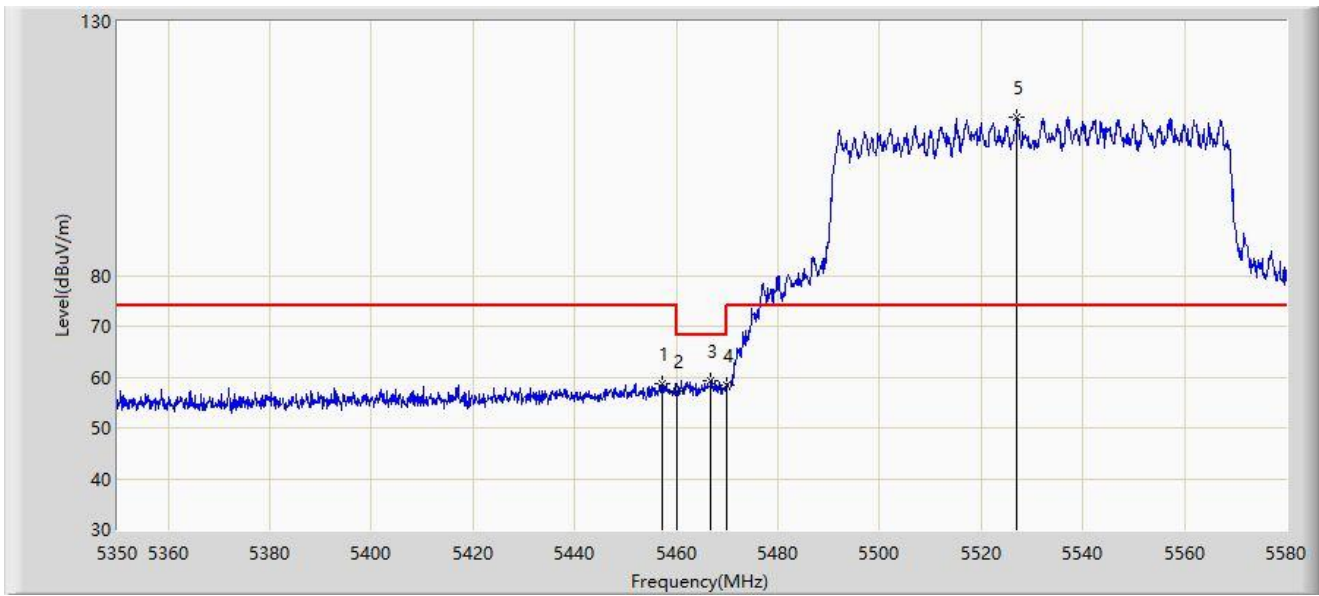


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.180	58.818	55.205	-15.182	74.000	3.612	PK
2		5460.000	57.104	53.474	-16.896	74.000	3.630	PK
3	*	5466.725	59.383	55.712	-8.817	68.200	3.671	PK
4		5470.000	58.366	54.675	-9.834	68.200	3.691	PK
5		5526.985	111.120	107.511	N/A	N/A	3.609	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

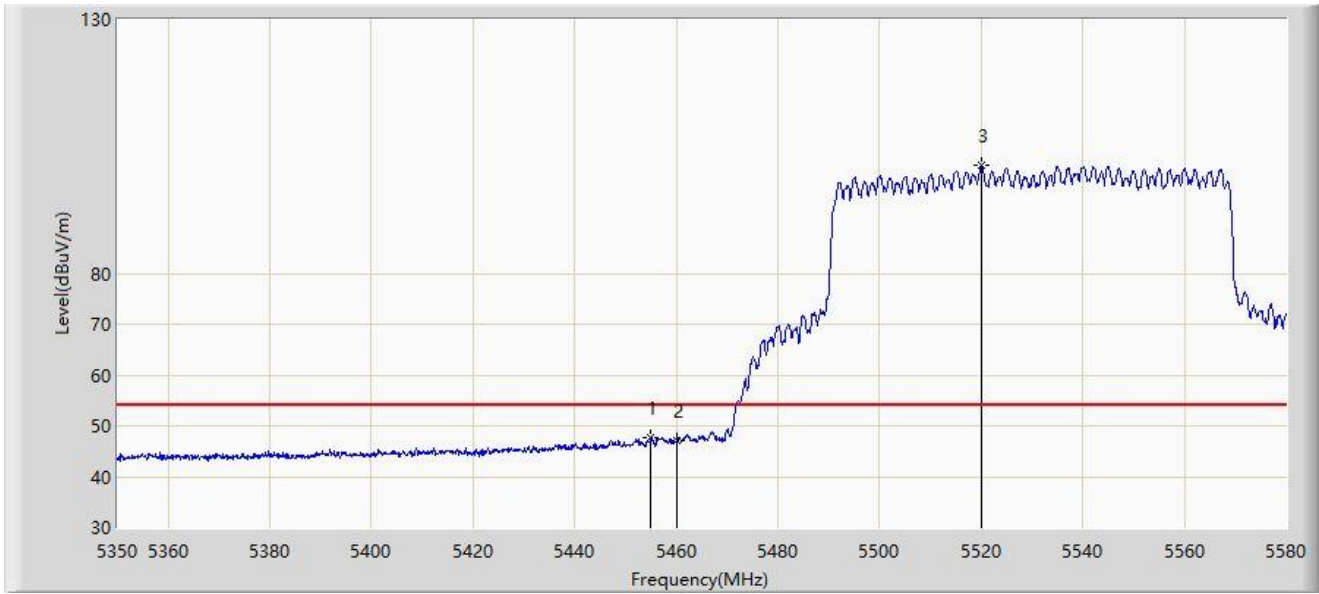


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5454.995	47.714	44.138	-6.286	54.000	3.577	AV
2		5460.000	47.113	43.483	-6.887	54.000	3.630	AV
3		5520.085	101.226	97.544	N/A	N/A	3.682	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

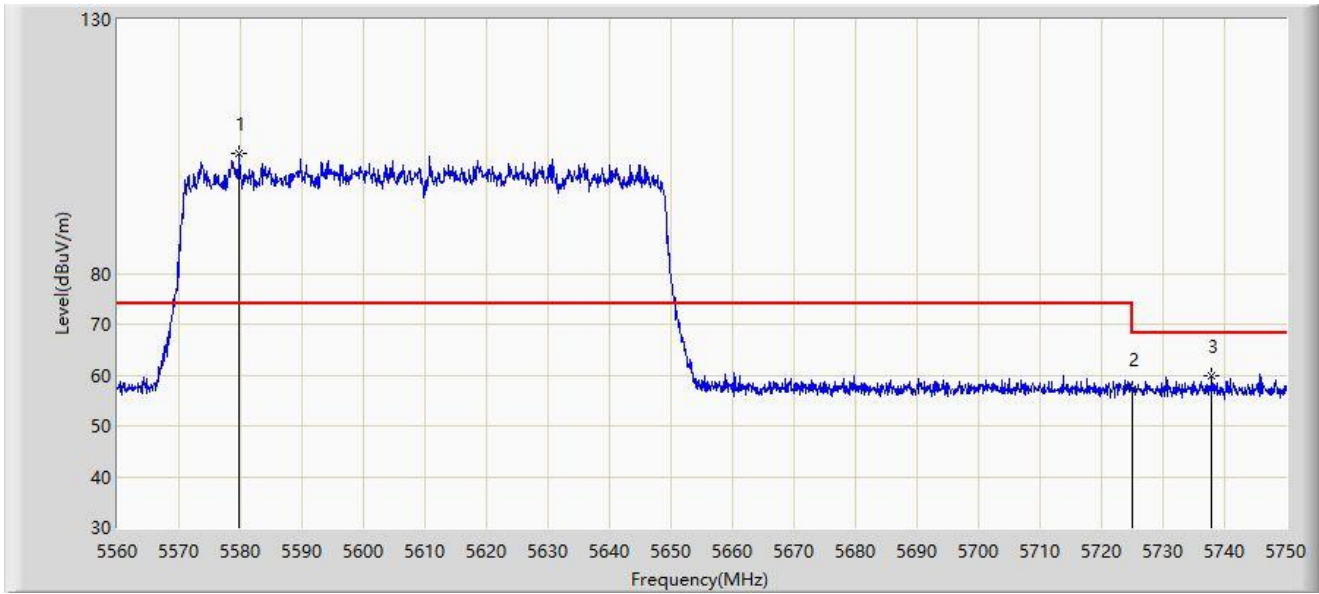

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5579.855	103.543	99.705	N/A	N/A	3.838	PK
2		5725.000	57.188	53.245	-11.012	68.200	3.943	PK
3	*	5737.935	59.975	55.879	-8.225	68.200	4.096	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

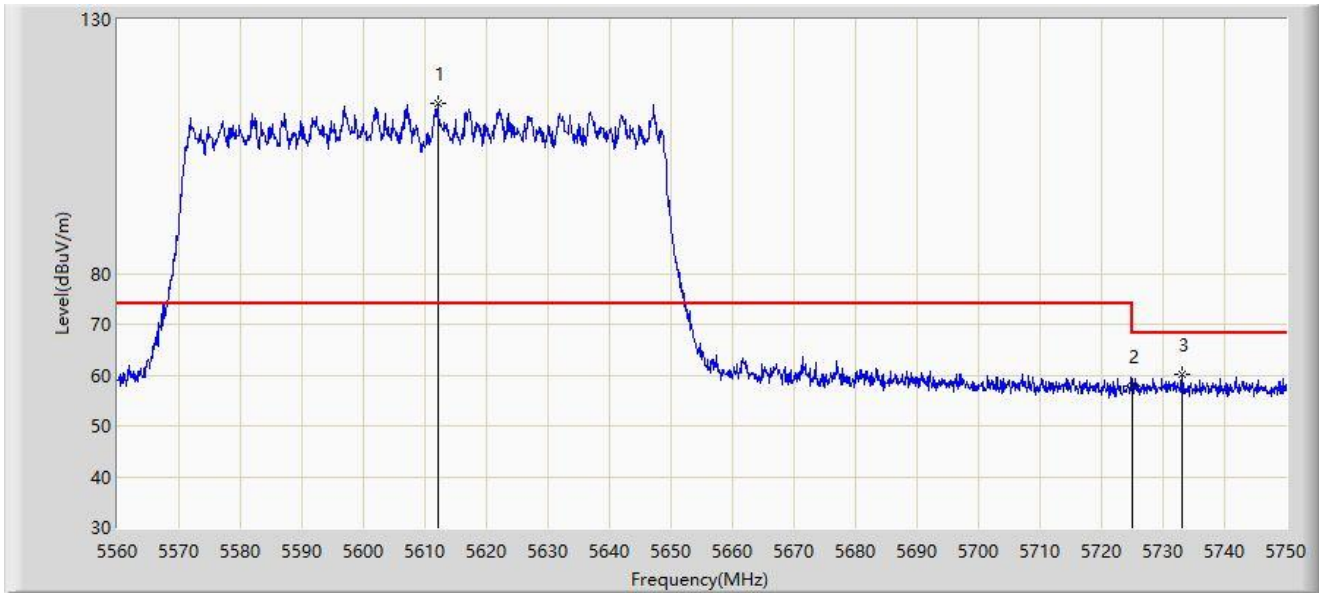


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5612.060	113.463	109.681	N/A	N/A	3.781	PK
2		5725.000	57.761	53.818	-10.439	68.200	3.943	PK
3	*	5733.090	60.139	56.104	-8.061	68.200	4.035	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

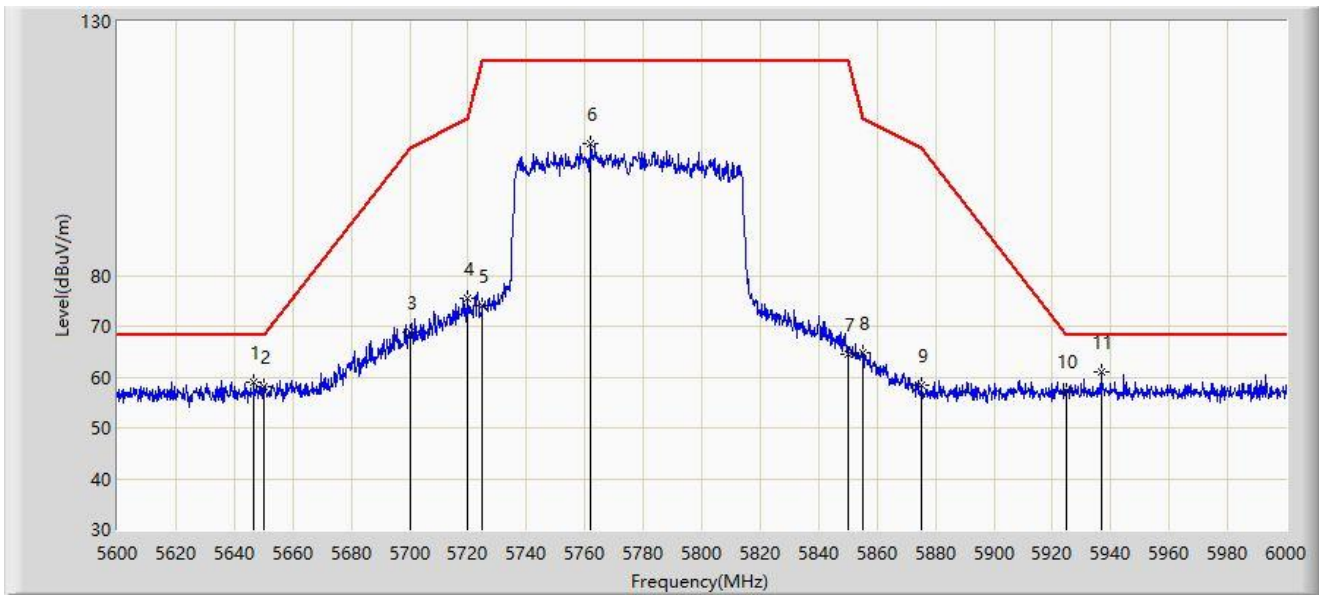


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5646.800	58.998	55.158	-9.202	68.200	3.839	PK
2		5650.000	58.171	54.257	-10.029	68.200	3.914	PK
3		5700.000	68.789	64.874	-36.411	105.200	3.916	PK
4		5720.000	75.572	71.643	-35.228	110.800	3.929	PK
5		5725.000	74.110	70.167	-48.090	122.200	3.943	PK
6		5762.000	106.019	101.782	N/A	N/A	4.238	PK
7		5850.000	64.432	59.988	-57.768	122.200	4.444	PK
8		5855.000	64.718	60.318	-46.082	110.800	4.400	PK
9		5875.000	58.385	54.074	-46.815	105.200	4.312	PK
10		5925.000	57.352	52.721	-10.848	68.200	4.630	PK
11	*	5936.800	61.095	56.520	-7.105	68.200	4.575	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

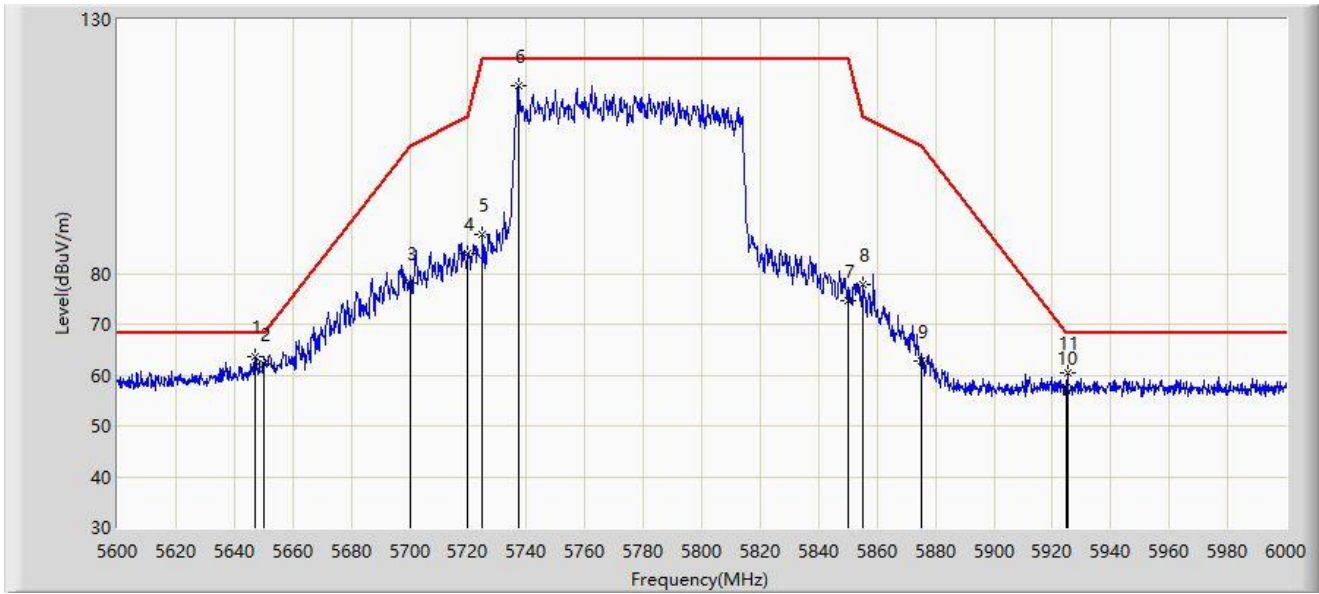


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.200	63.554	59.705	-4.646	68.200	3.849	PK
2		5650.000	62.267	58.353	-5.933	68.200	3.914	PK
3		5700.000	78.177	74.262	-27.023	105.200	3.916	PK
4		5720.000	83.824	79.895	-26.976	110.800	3.929	PK
5		5725.000	87.544	83.601	-34.656	122.200	3.943	PK
6		5737.200	116.975	112.888	N/A	N/A	4.086	PK
7		5850.000	74.770	70.326	-47.430	122.200	4.444	PK
8		5855.000	77.903	73.503	-32.897	110.800	4.400	PK
9		5875.000	62.699	58.388	-42.501	105.200	4.312	PK
10		5925.000	57.450	52.819	-10.750	68.200	4.630	PK
11		5925.200	60.483	55.852	-7.717	68.200	4.631	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

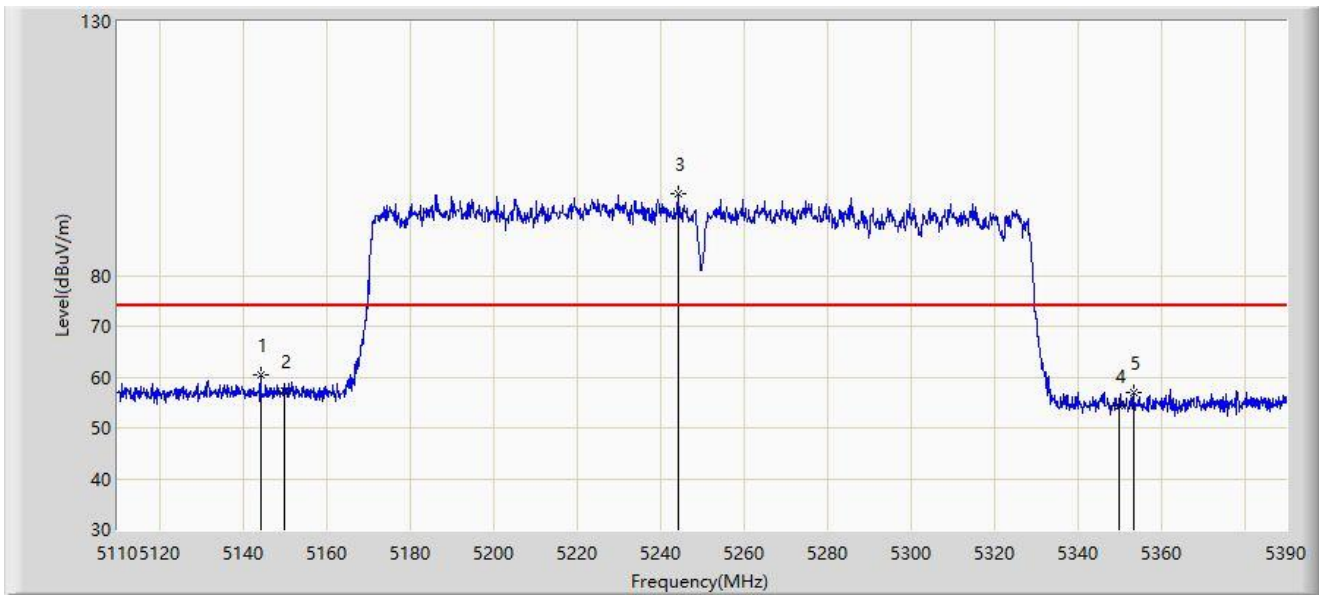


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.300	60.417	56.779	-13.583	74.000	3.638	PK
2		5150.000	57.353	53.712	-16.647	74.000	3.641	PK
3		5244.540	96.000	92.657	N/A	N/A	3.343	PK
4		5350.000	54.345	51.000	-19.655	74.000	3.344	PK
5		5353.460	56.990	53.683	-17.010	74.000	3.307	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

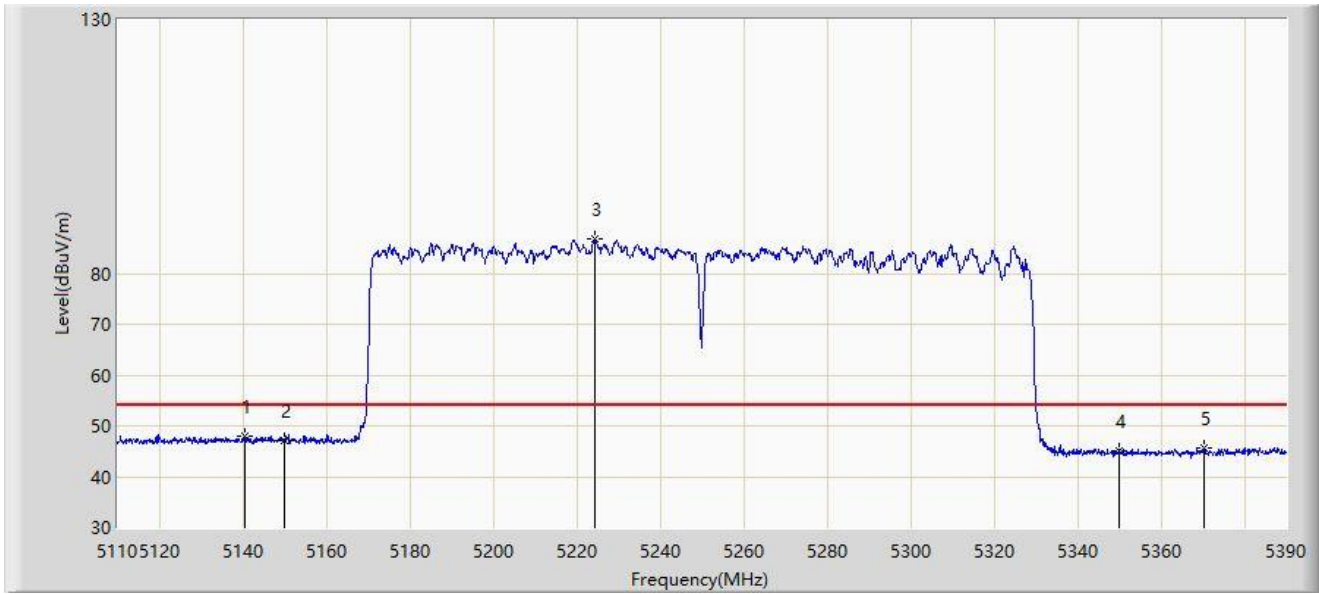


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5140.380	47.902	44.276	-6.098	54.000	3.626	AV
2		5150.000	47.156	43.515	-6.844	54.000	3.641	AV
3		5224.380	86.757	83.436	N/A	N/A	3.320	AV
4		5350.000	45.160	41.815	-8.840	54.000	3.344	AV
5		5370.400	45.742	42.431	-8.258	54.000	3.311	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

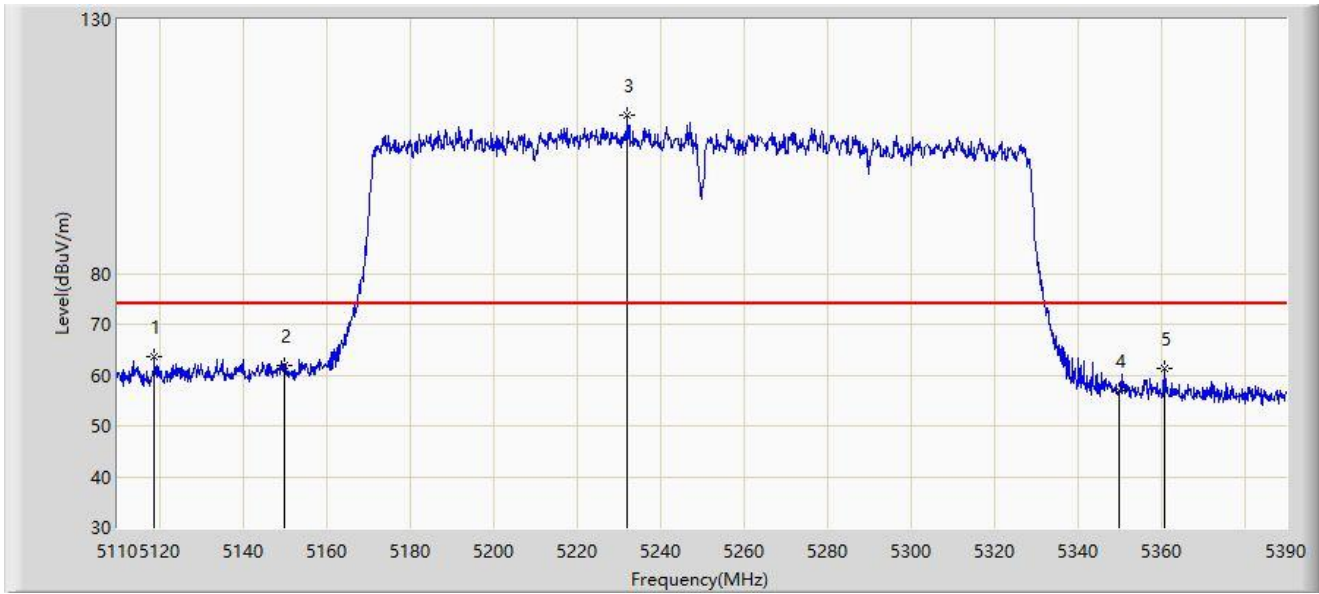


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5118.820	63.683	60.253	-10.317	74.000	3.430	PK
2		5150.000	61.813	58.172	-12.187	74.000	3.641	PK
3		5232.220	111.163	107.791	N/A	N/A	3.372	PK
4		5350.000	56.925	53.580	-17.075	74.000	3.344	PK
5		5360.740	61.301	58.016	-12.699	74.000	3.286	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

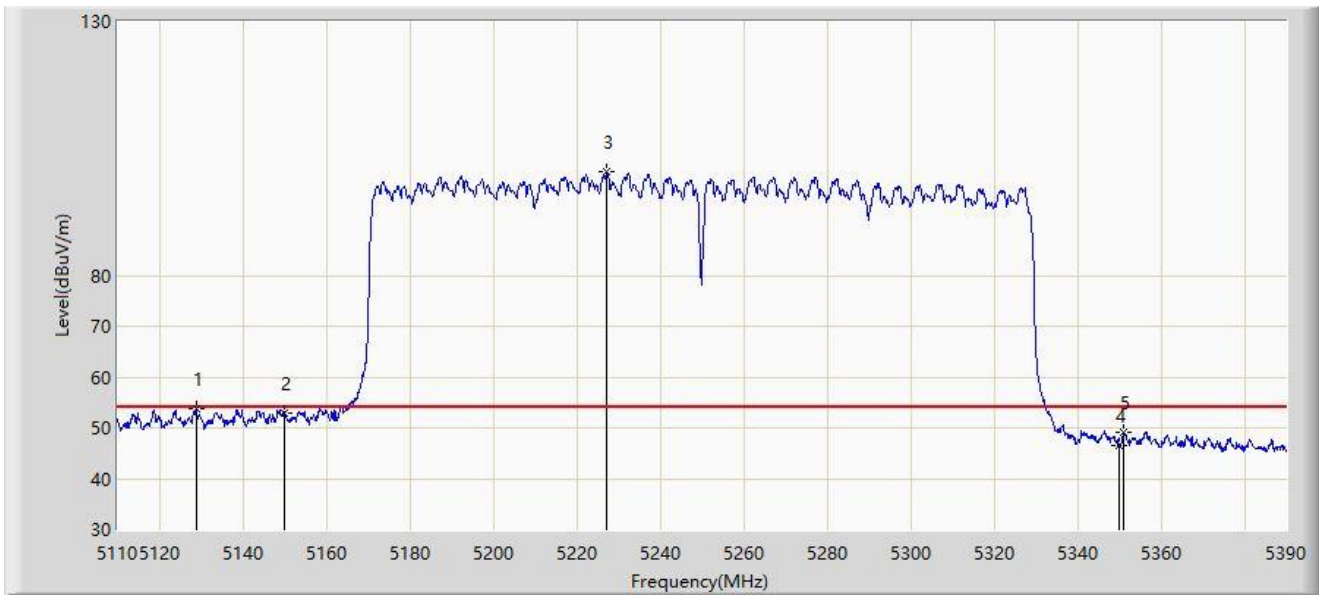

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5128.900	53.849	50.295	-0.151	54.000	3.554	AV
2		5150.000	52.953	49.312	-1.047	54.000	3.641	AV
3		5227.180	100.358	97.019	N/A	N/A	3.340	AV
4		5350.000	46.509	43.164	-7.491	54.000	3.344	AV
5		5351.220	49.153	45.829	-4.847	54.000	3.325	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

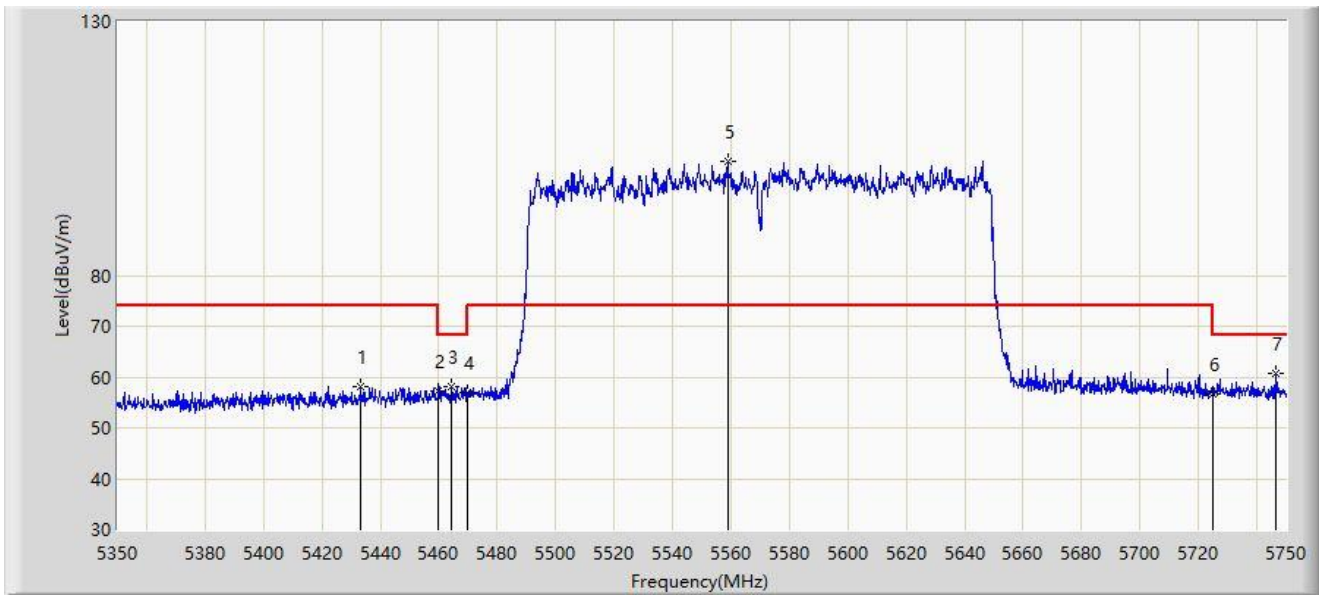

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5433.400	58.002	54.452	-15.998	74.000	3.550	PK
2		5460.000	57.242	53.612	-16.758	74.000	3.630	PK
3		5464.400	58.036	54.379	-10.164	68.200	3.657	PK
4		5470.000	56.939	53.248	-11.261	68.200	3.691	PK
5		5558.800	102.552	98.817	N/A	N/A	3.735	PK
6		5725.000	56.642	52.699	-11.558	68.200	3.943	PK
7	*	5746.600	60.585	56.412	-7.615	68.200	4.173	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

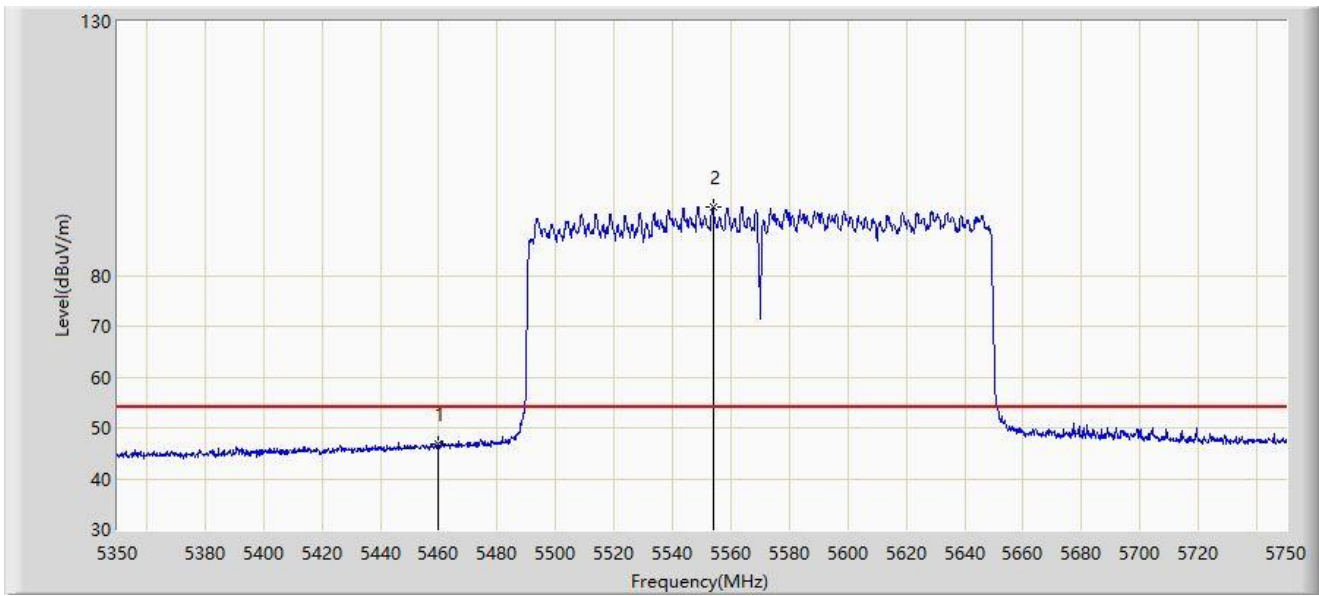


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	46.944	43.314	-7.056	54.000	3.630	AV
2		5553.800	93.549	89.838	N/A	N/A	3.711	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

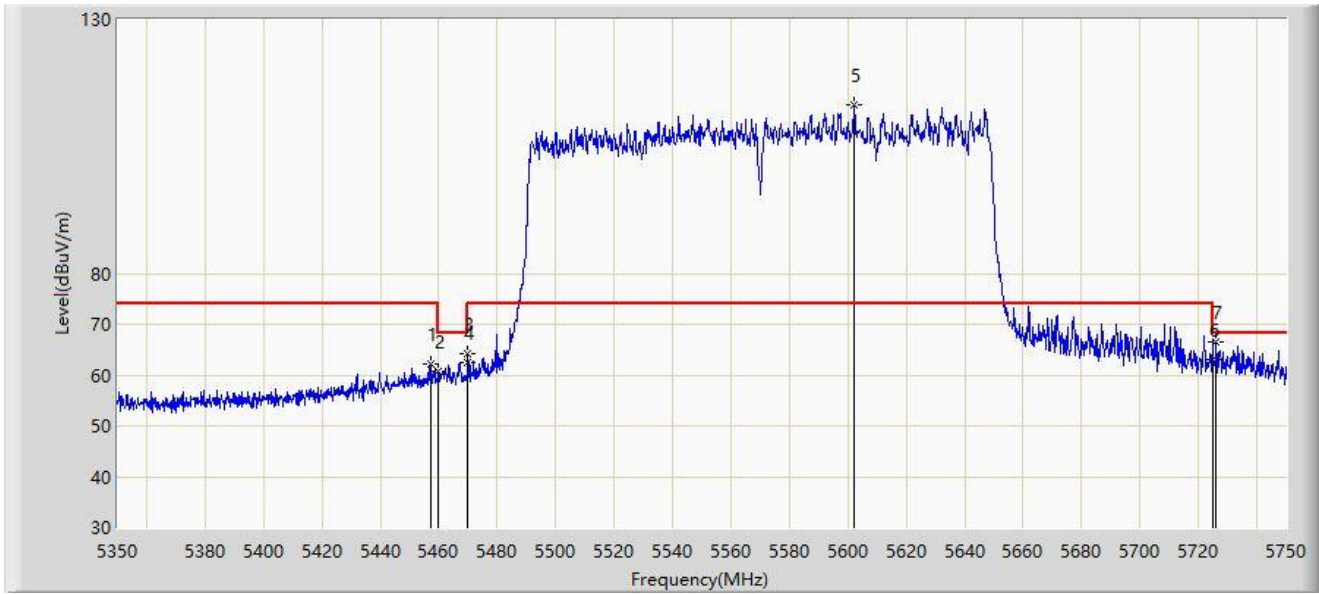


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5457.400	62.125	58.511	-11.875	74.000	3.615	PK
2		5460.000	60.699	57.069	-13.301	74.000	3.630	PK
3		5469.800	64.347	60.657	-3.853	68.200	3.690	PK
4		5470.000	62.369	58.678	-5.831	68.200	3.691	PK
5		5602.200	113.183	109.324	N/A	N/A	3.858	PK
6		5725.000	63.047	59.104	-5.153	68.200	3.943	PK
7	*	5726.000	66.503	62.557	-1.697	68.200	3.945	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

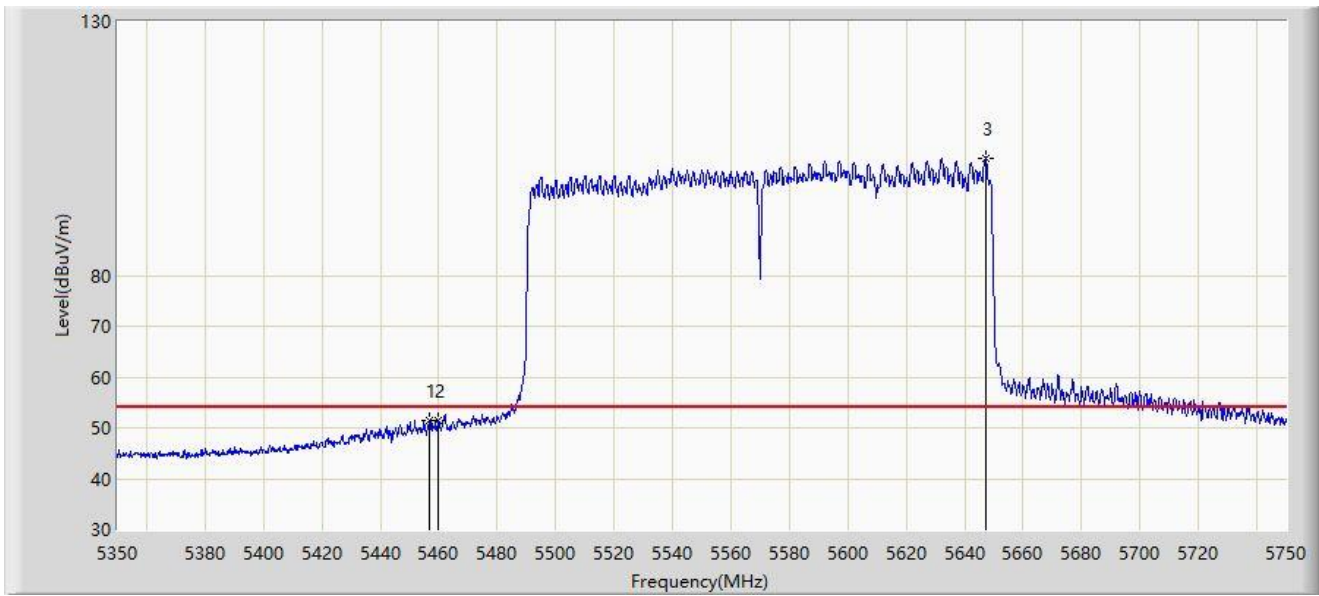


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5457.000	51.590	47.978	-2.410	54.000	3.612	AV
2		5460.000	51.364	47.734	-2.636	54.000	3.630	AV
3		5647.200	103.188	99.339	N/A	N/A	3.849	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

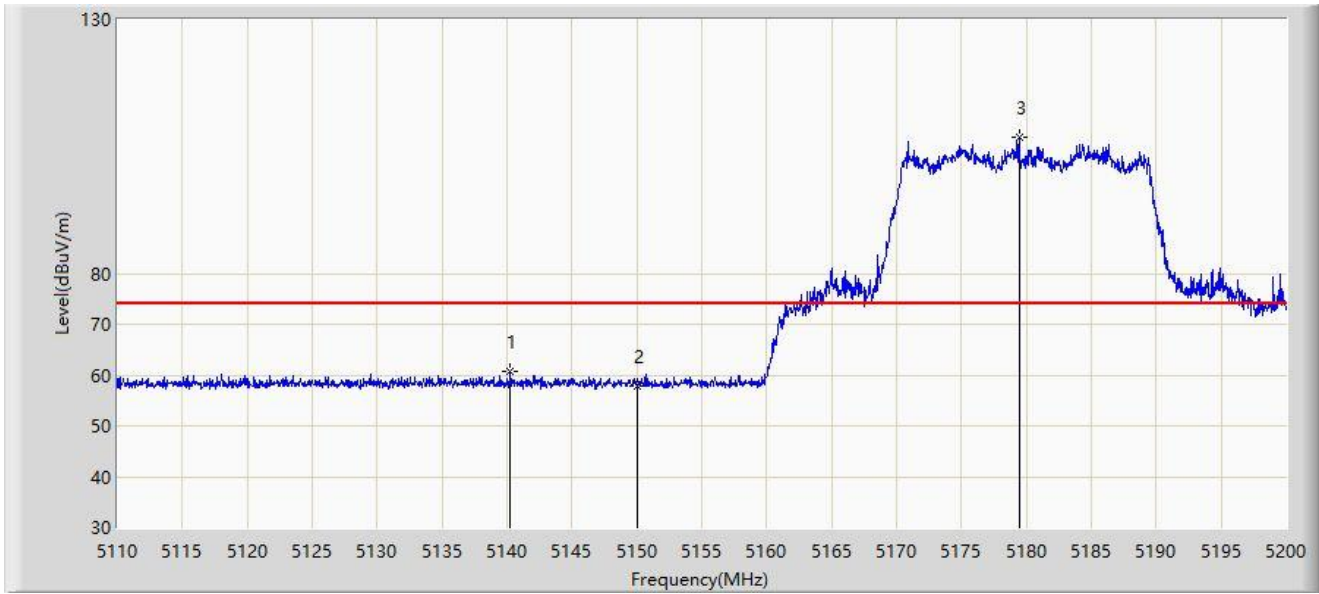

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5140.240	60.622	56.996	-13.378	74.000	3.626	PK
2		5150.000	57.691	54.050	-16.309	74.000	3.641	PK
3		5179.435	106.870	103.535	N/A	N/A	3.335	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5139.565	48.484	44.860	-5.516	54.000	3.624	AV
2		5150.000	48.278	44.637	-5.722	54.000	3.641	AV
3		5180.965	95.700	92.367	N/A	N/A	3.333	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

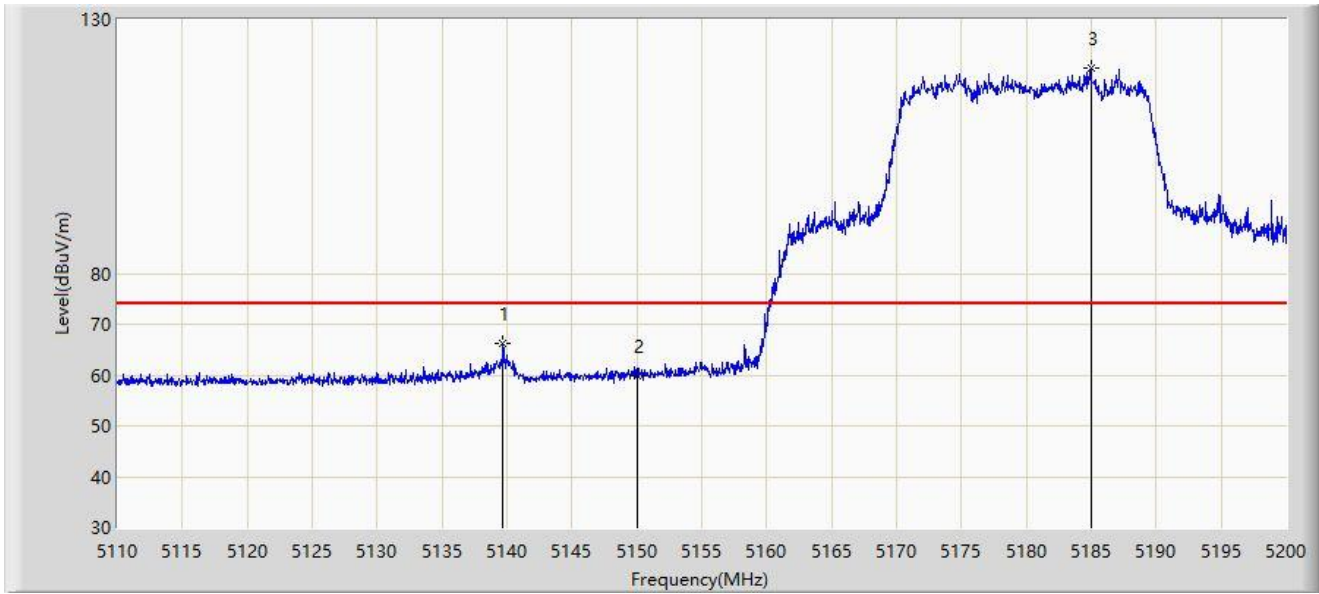

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5139.700	66.171	62.547	-7.829	74.000	3.624	PK
2		5150.000	59.896	56.255	-14.104	74.000	3.641	PK
3		5184.970	120.442	117.097	N/A	N/A	3.345	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5139.835	51.587	47.962	-2.413	54.000	3.625	AV
2		5150.000	50.539	46.898	-3.461	54.000	3.641	AV
3		5184.655	109.112	105.769	N/A	N/A	3.343	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHz	

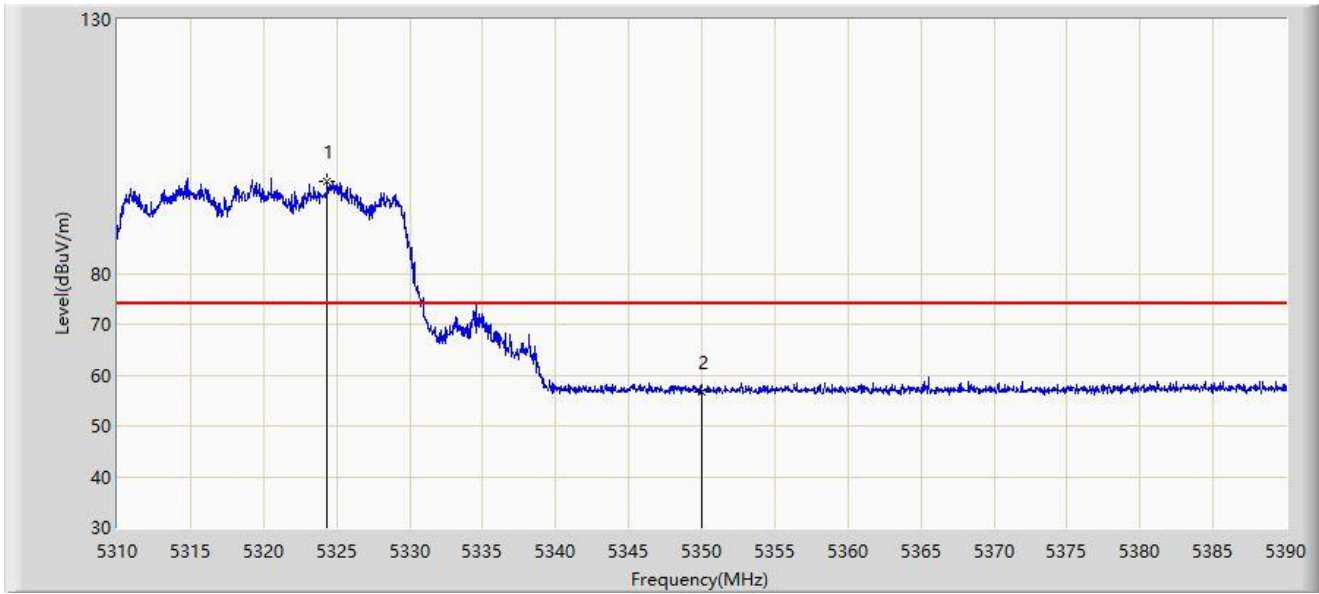

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5324.360	98.233	94.826	N/A	N/A	3.406	PK
2	*	5350.000	56.729	53.384	-17.271	74.000	3.344	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHz	

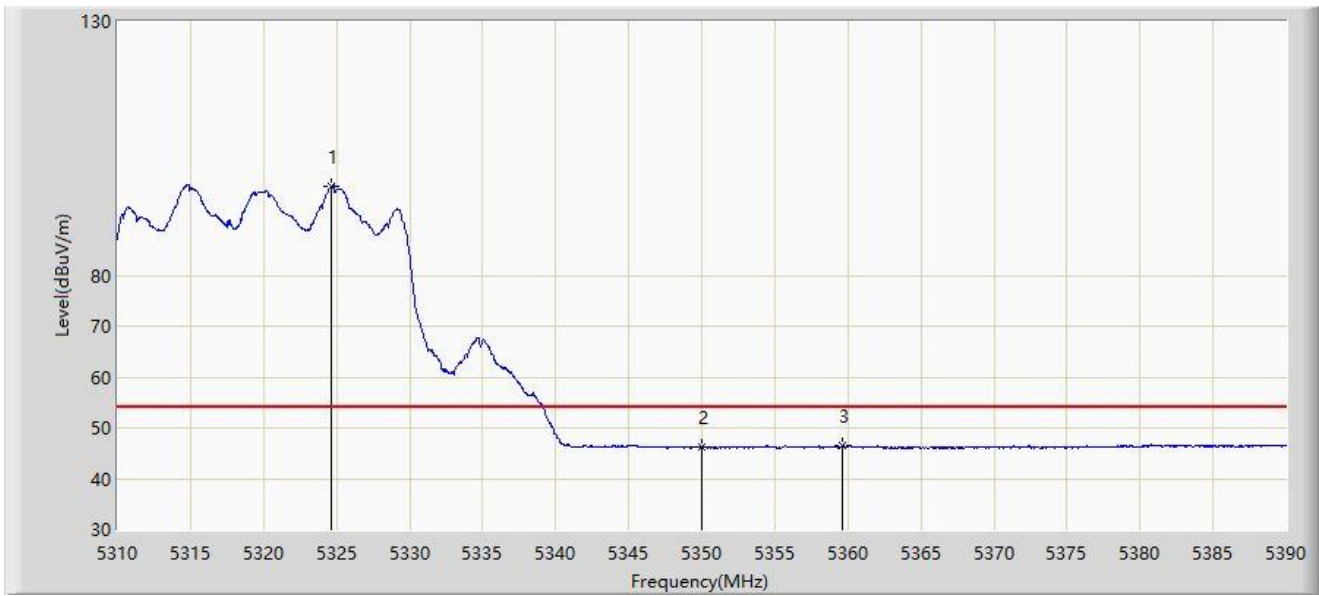


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5324.680	97.610	94.203	N/A	N/A	3.408	AV
2		5350.000	46.205	42.860	-7.795	54.000	3.344	AV
3	*	5359.640	46.643	43.354	-7.357	54.000	3.289	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHz	

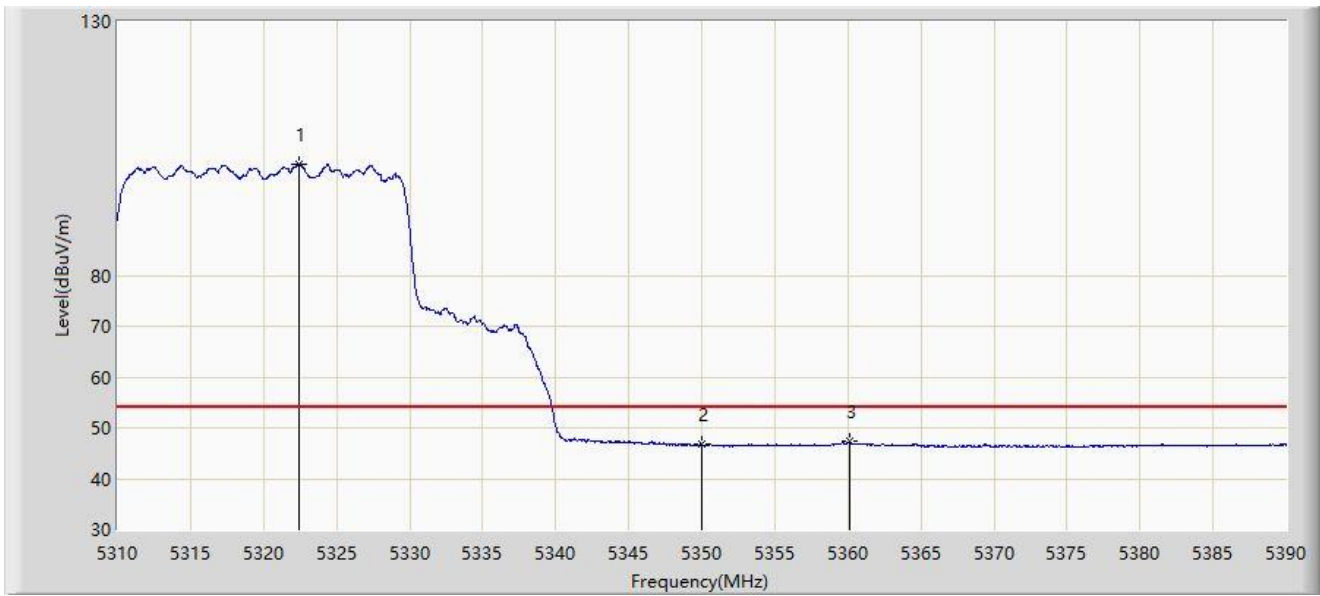


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.400	101.988	98.584	N/A	N/A	3.404	AV
2		5350.000	46.686	43.341	-7.314	54.000	3.344	AV
3	*	5360.080	47.323	44.036	-6.677	54.000	3.288	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHz	

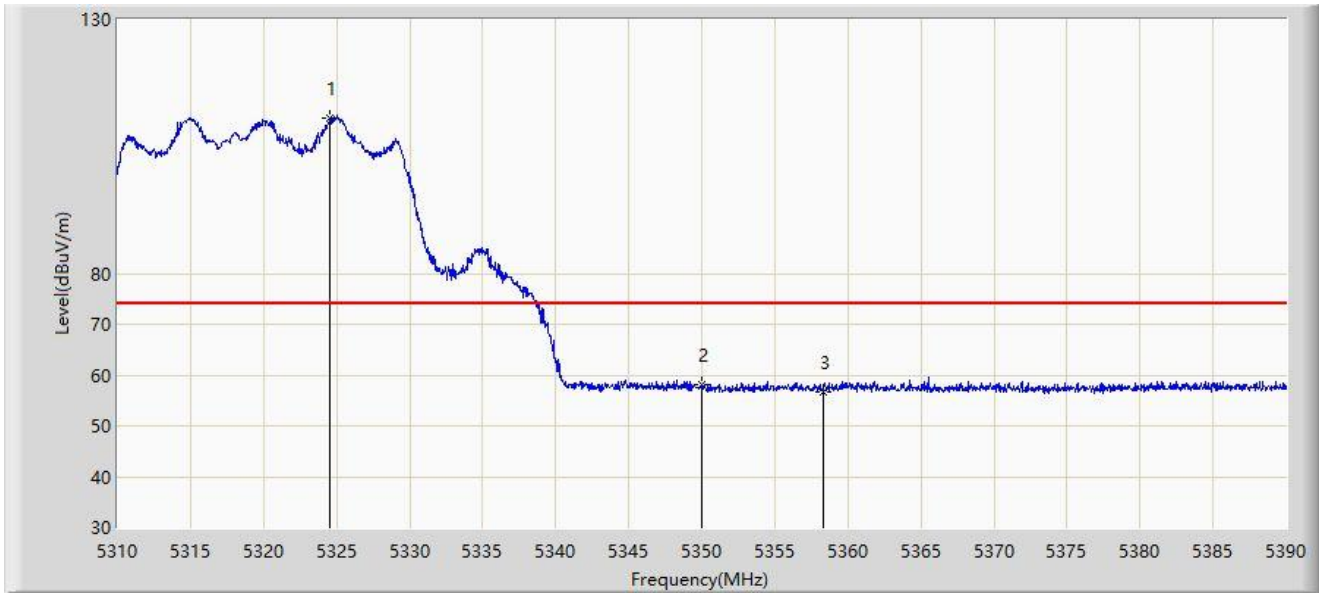

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5324.560	110.599	107.192	N/A	N/A	3.406	PK
2	*	5350.000	58.081	54.736	-15.919	74.000	3.344	PK
3		5358.360	56.674	53.382	-17.326	74.000	3.292	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5449.485	58.442	54.889	-15.558	74.000	3.552	PK
2		5460.000	56.817	53.187	-17.183	74.000	3.630	PK
3	*	5463.570	58.712	55.060	-9.488	68.200	3.652	PK
4		5470.000	57.264	53.573	-10.936	68.200	3.691	PK
5		5505.960	104.963	101.133	N/A	N/A	3.831	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHz	

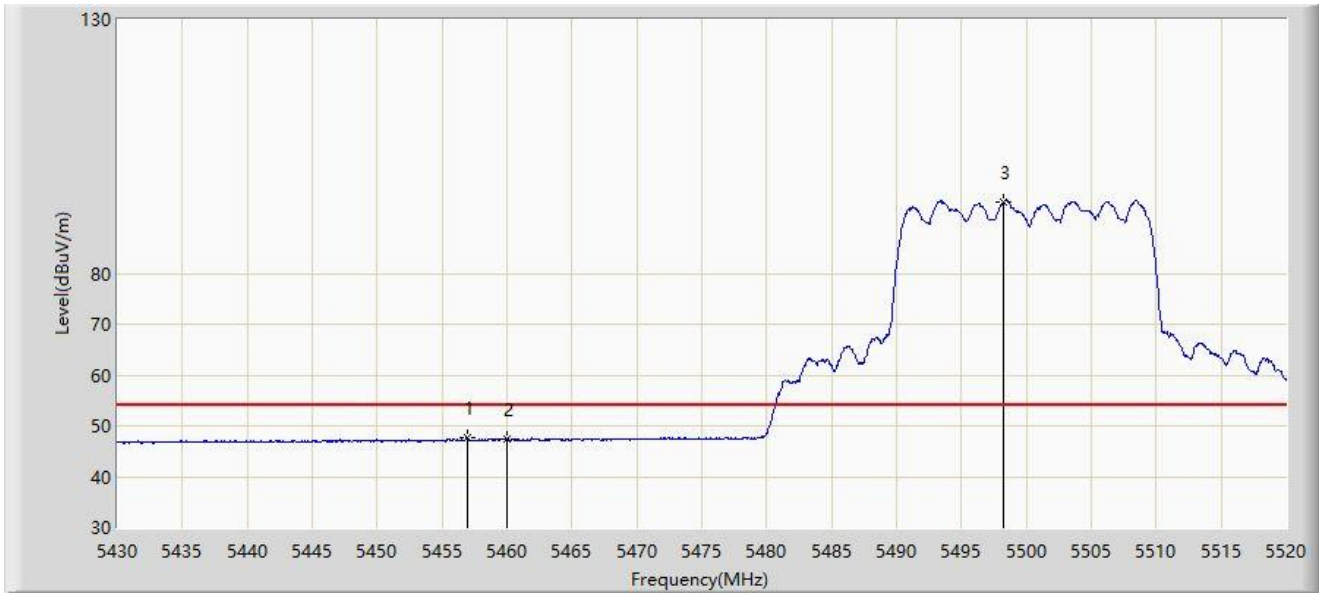


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.910	47.572	43.961	-6.428	54.000	3.611	AV
2		5460.000	47.358	43.728	-6.642	54.000	3.630	AV
3		5498.265	94.196	90.293	N/A	N/A	3.903	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHz	

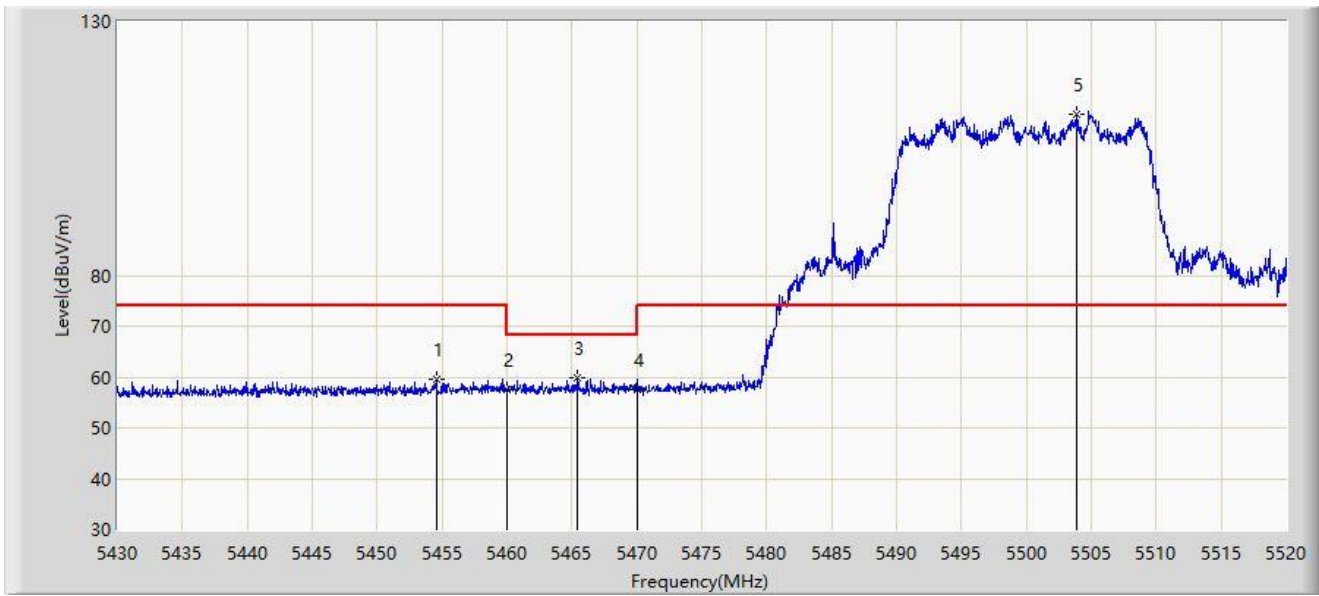


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.570	59.425	55.857	-14.575	74.000	3.568	PK
2		5460.000	57.405	53.775	-16.595	74.000	3.630	PK
3	*	5465.415	59.876	56.213	-8.324	68.200	3.663	PK
4		5470.000	57.533	53.842	-10.667	68.200	3.691	PK
5		5503.845	111.717	107.867	N/A	N/A	3.851	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHz	

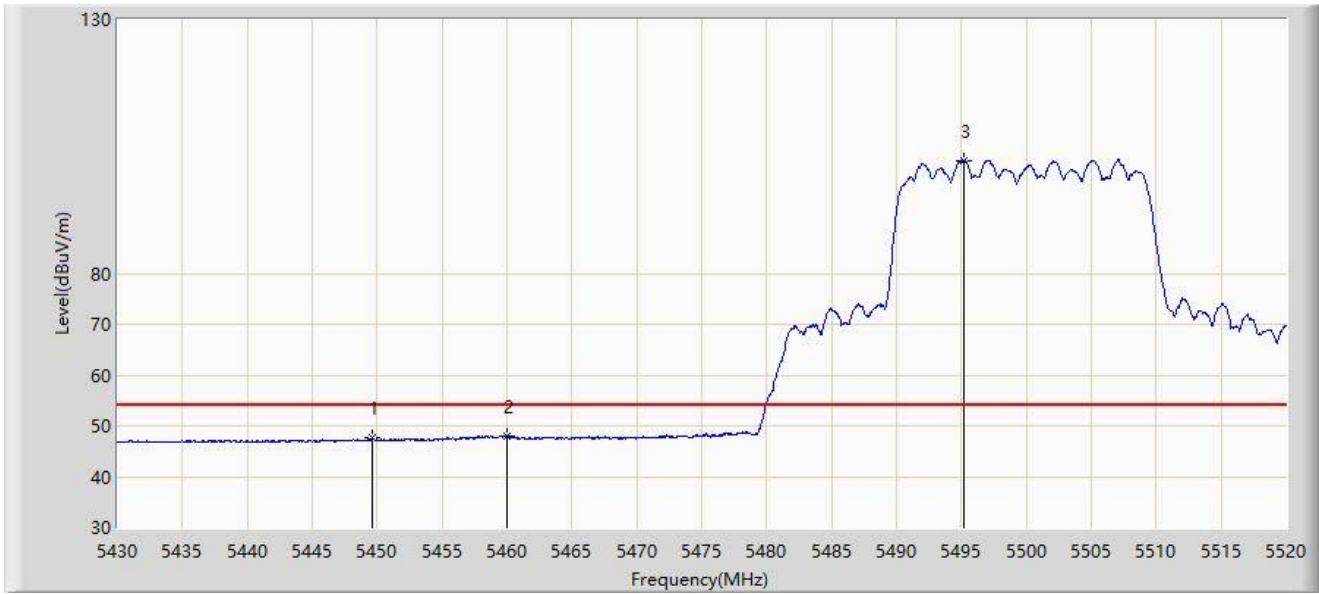


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5449.575	47.599	44.046	-6.401	54.000	3.553	AV
2	*	5460.000	48.069	44.439	-5.931	54.000	3.630	AV
3		5495.160	102.224	98.292	N/A	N/A	3.932	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

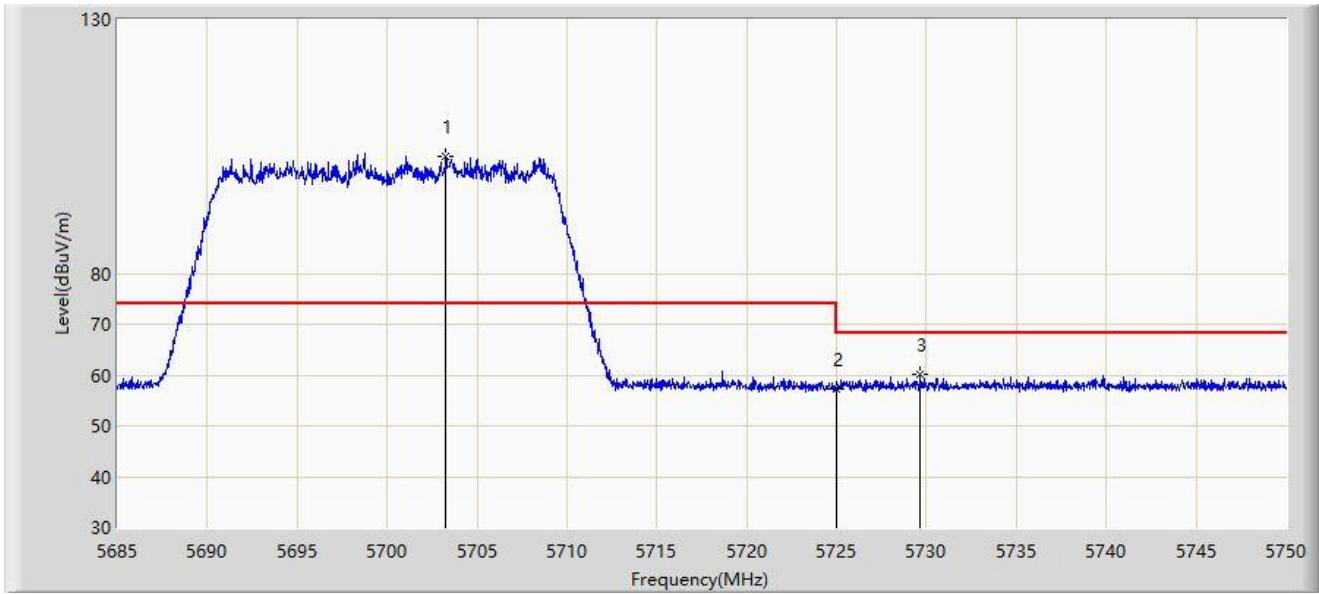

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5703.265	103.174	99.265	N/A	N/A	3.909	PK
2		5725.000	57.256	53.313	-10.944	68.200	3.943	PK
3	*	5729.655	60.095	56.104	-8.105	68.200	3.991	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

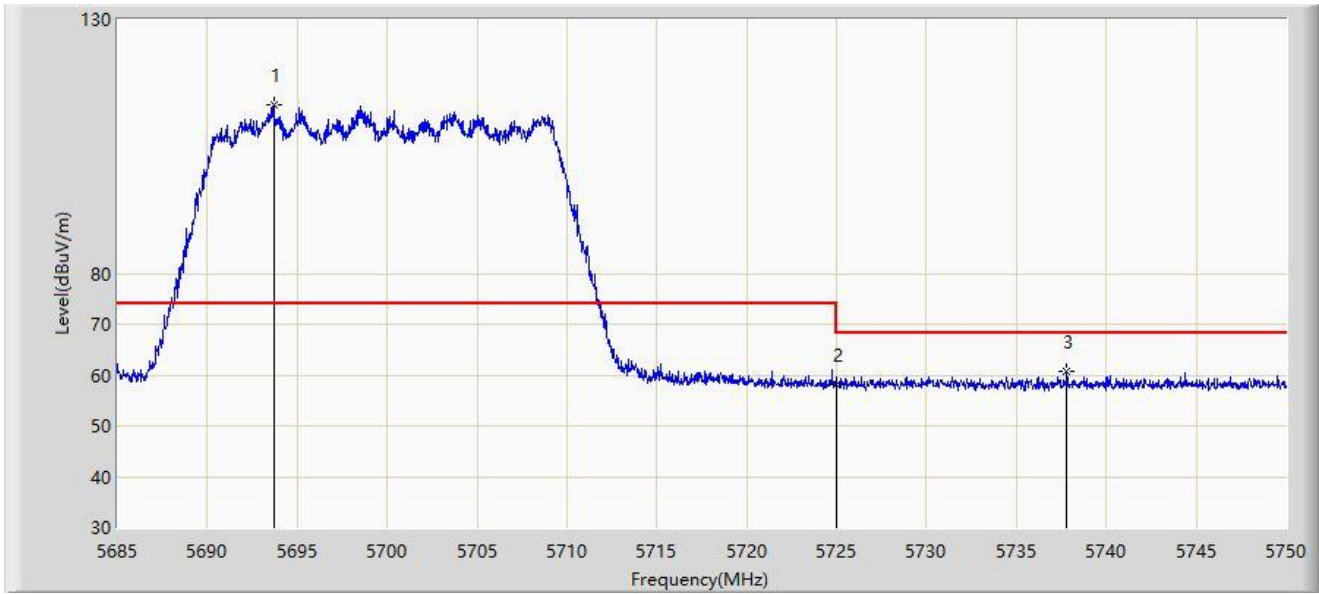


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5693.710	113.149	109.222	N/A	N/A	3.927	PK
2		5725.000	58.173	54.230	-10.027	68.200	3.943	PK
3	*	5737.812	60.641	56.547	-7.559	68.200	4.095	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5745MHz	

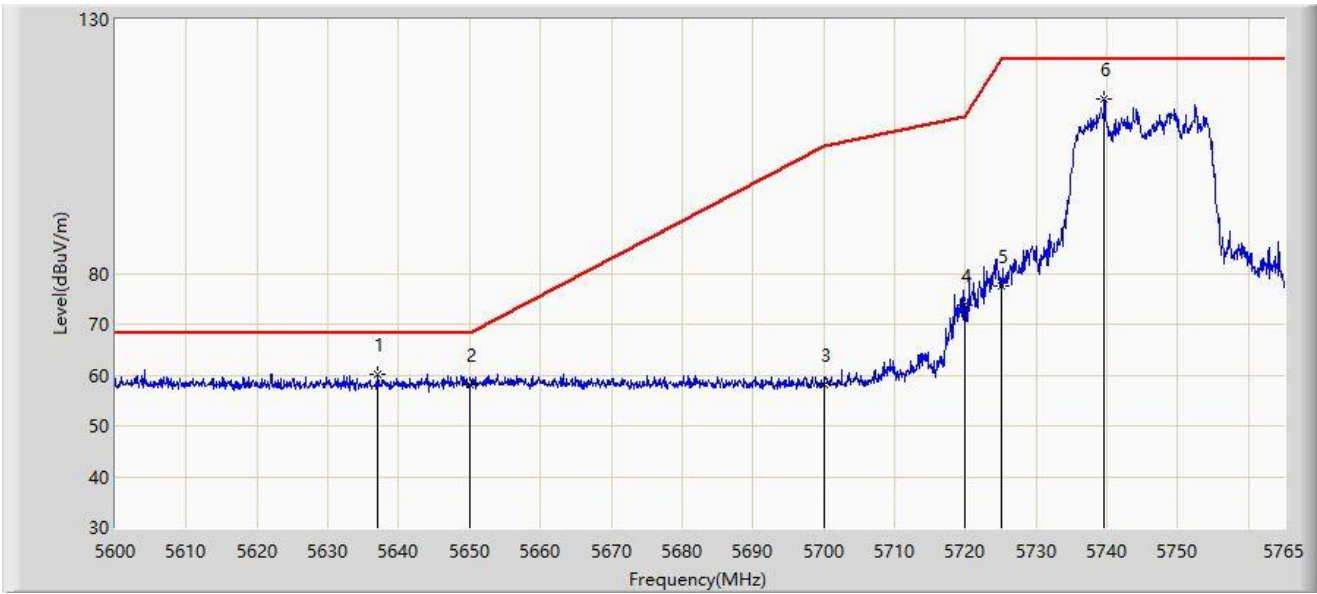


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5637.042	60.265	56.610	-7.935	68.200	3.656	PK
2		5650.000	58.115	54.201	-10.085	68.200	3.914	PK
3		5700.000	58.138	54.223	-47.062	105.200	3.916	PK
4		5720.000	73.722	69.793	-37.078	110.800	3.929	PK
5		5725.000	77.614	73.671	-44.586	122.200	3.943	PK
6		5739.590	114.301	110.184	N/A	N/A	4.117	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5745MHz	

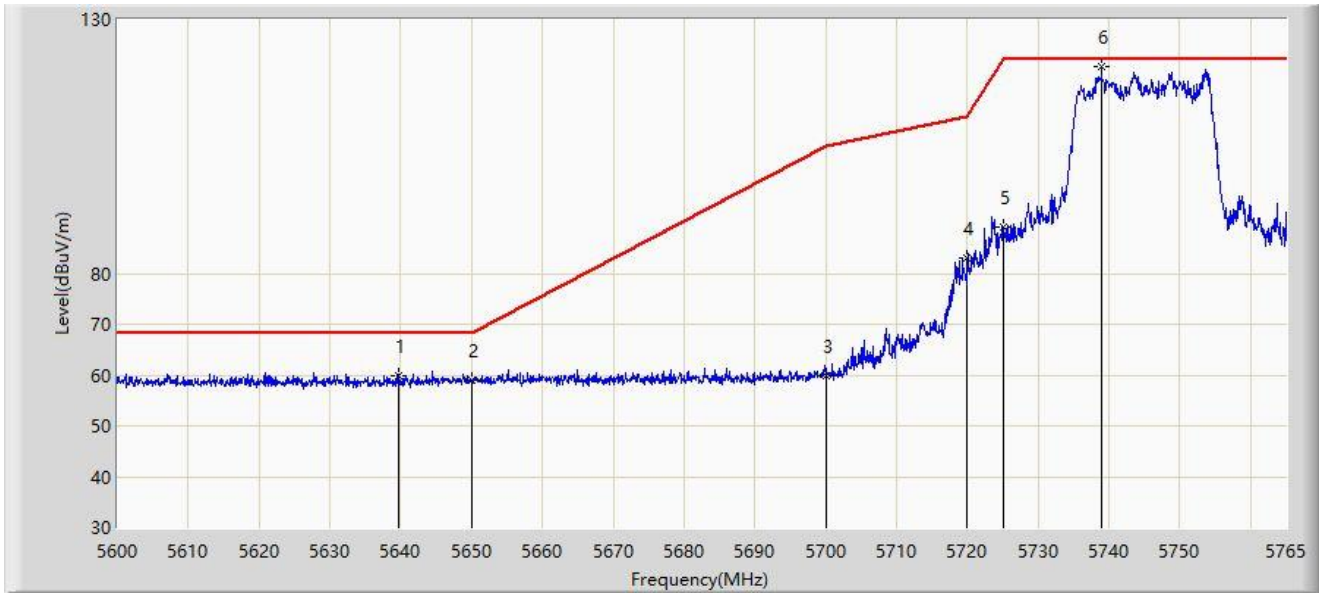


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5639.683	60.000	56.311	-8.200	68.200	3.689	PK
2		5650.000	58.967	55.053	-9.233	68.200	3.914	PK
3		5700.000	59.965	56.050	-45.235	105.200	3.916	PK
4		5720.000	82.956	79.027	-27.844	110.800	3.929	PK
5		5725.000	89.256	85.313	-32.944	122.200	3.943	PK
6		5738.930	120.711	116.602	N/A	N/A	4.108	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5825MHz	

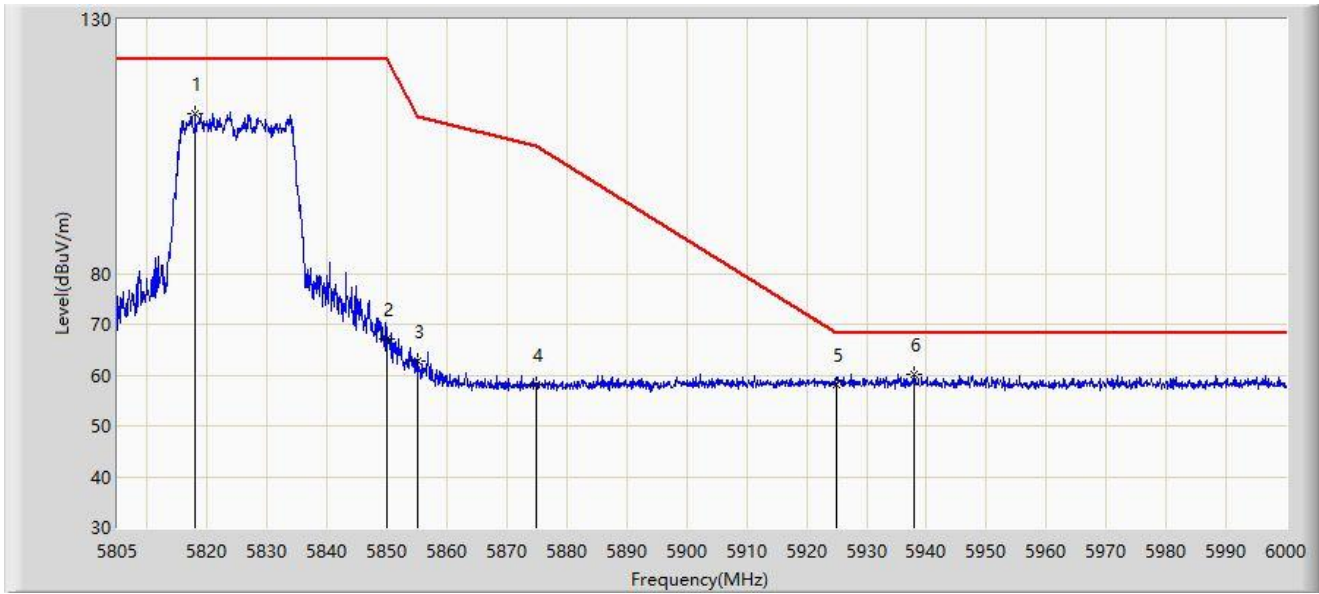


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5818.065	111.440	107.079	N/A	N/A	4.361	PK
2		5850.000	67.225	62.781	-54.975	122.200	4.444	PK
3		5855.000	62.878	58.478	-47.922	110.800	4.400	PK
4		5875.000	58.243	53.932	-46.957	105.200	4.312	PK
5		5925.000	57.987	53.356	-10.213	68.200	4.630	PK
6	*	5937.893	60.055	55.490	-8.145	68.200	4.565	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5825MHz	

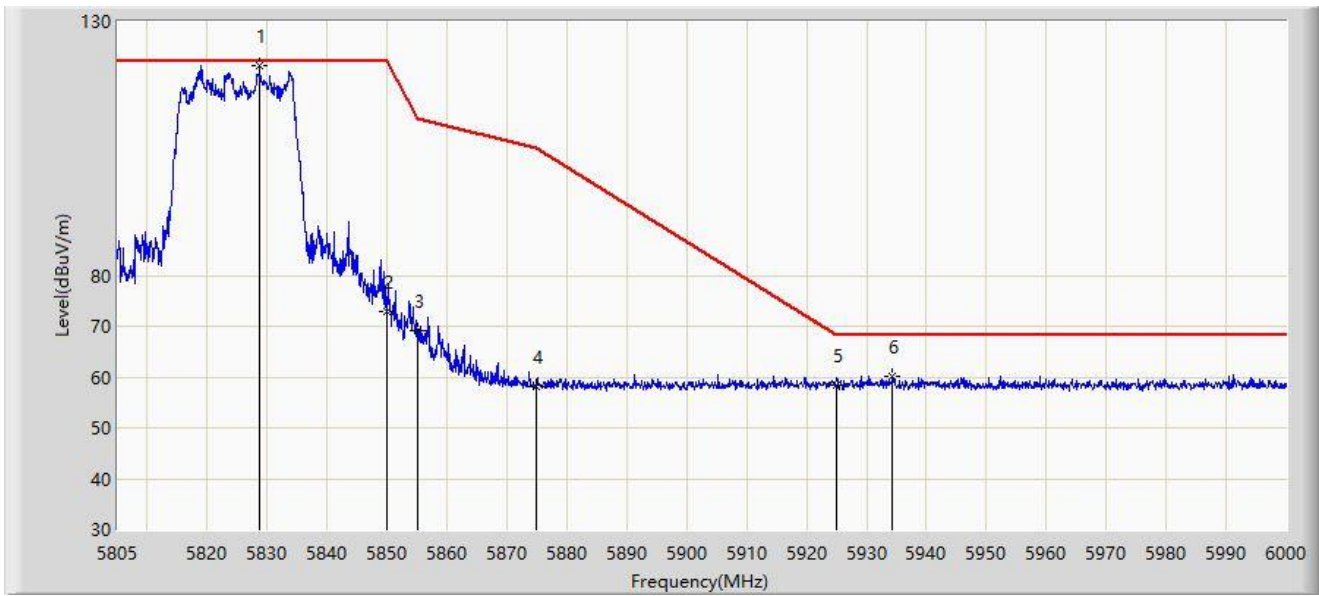


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5828.692	121.324	116.898	N/A	N/A	4.426	PK
2		5850.000	72.933	68.489	-49.267	122.200	4.444	PK
3		5855.000	69.159	64.759	-41.641	110.800	4.400	PK
4		5875.000	58.246	53.935	-46.954	105.200	4.312	PK
5		5925.000	58.281	53.650	-9.919	68.200	4.630	PK
6	*	5934.285	60.089	55.492	-8.111	68.200	4.597	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190MHz	

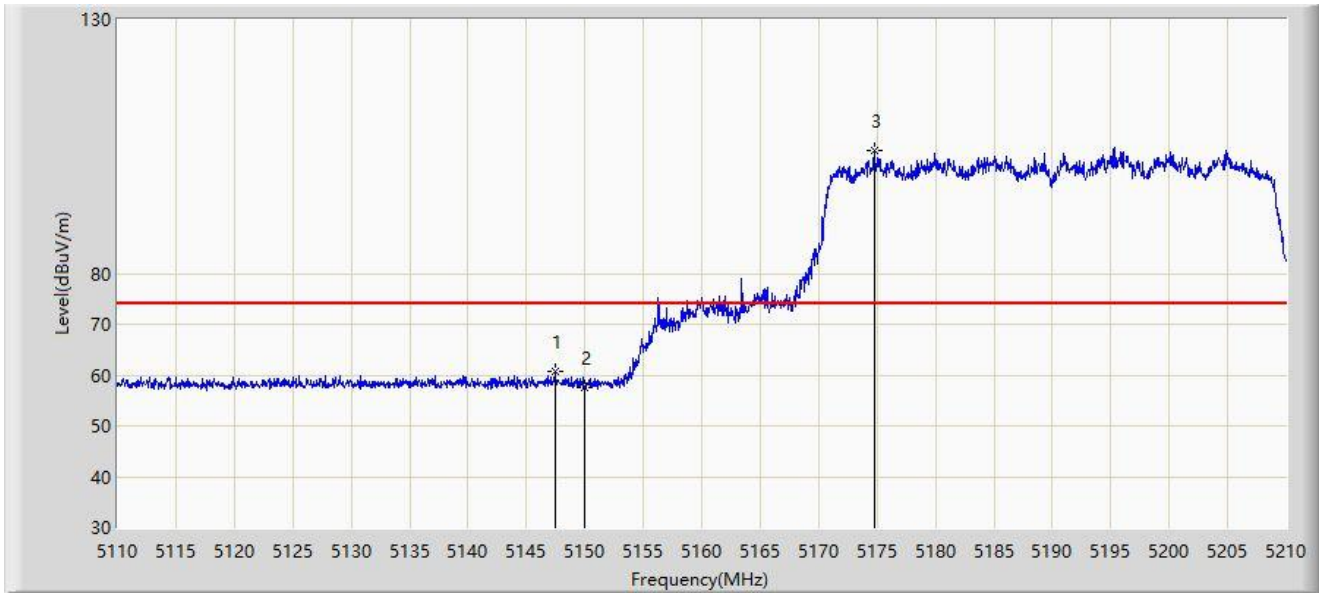


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5147.450	60.702	57.054	-13.298	74.000	3.648	PK
2		5150.000	57.420	53.779	-16.580	74.000	3.641	PK
3		5174.750	104.082	100.741	N/A	N/A	3.341	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190MHz	

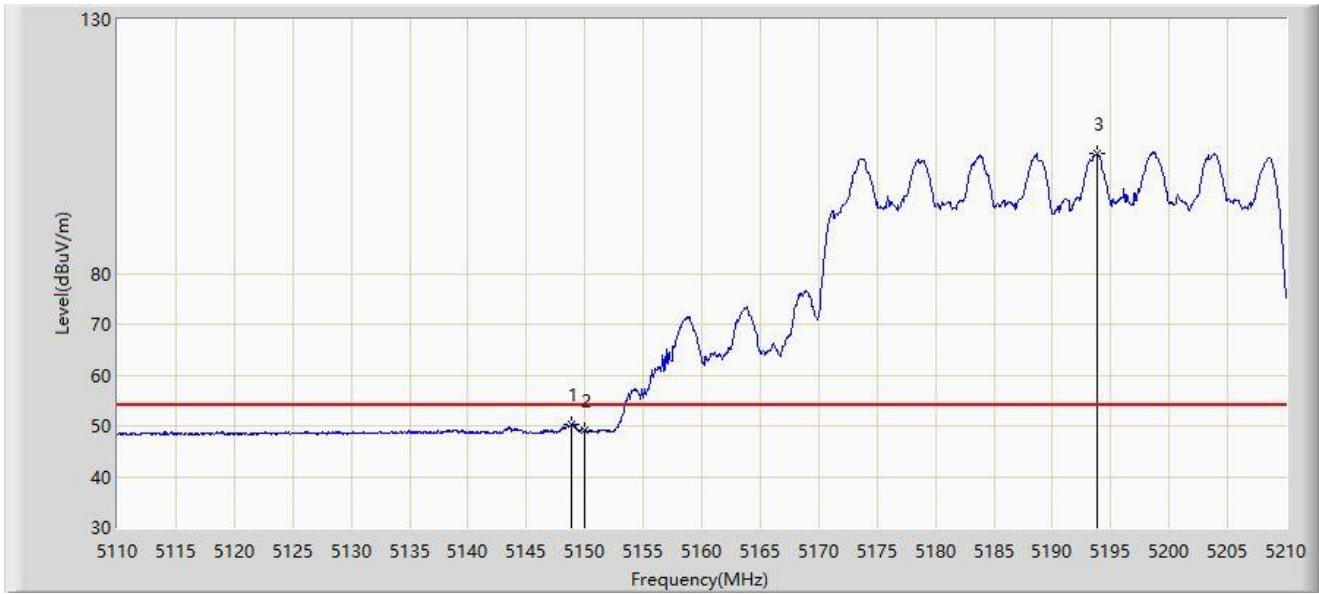

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.900	50.365	46.720	-3.635	54.000	3.645	AV
2		5150.000	49.066	45.425	-4.934	54.000	3.641	AV
3		5193.800	103.496	100.179	N/A	N/A	3.317	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190MHz	

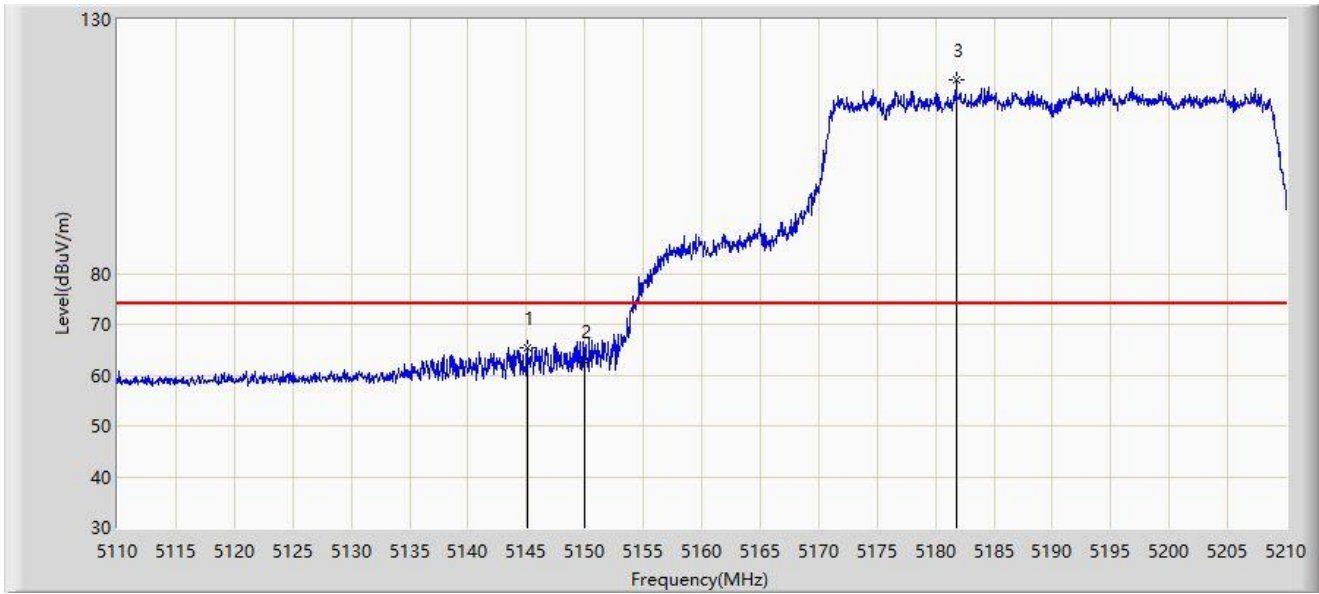

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5145.050	65.440	61.799	-8.560	74.000	3.641	PK
2		5150.000	62.875	59.234	-11.125	74.000	3.641	PK
3		5181.800	118.034	114.702	N/A	N/A	3.331	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190MHz	

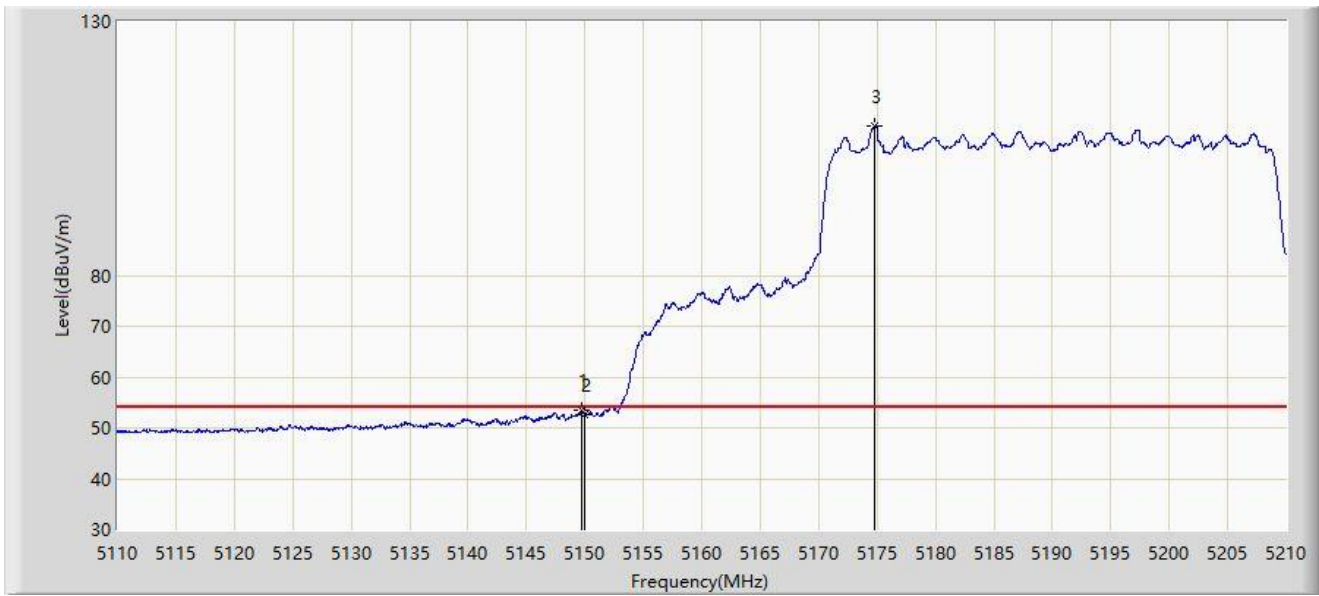

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.700	53.347	49.705	-0.653	54.000	3.642	AV
2		5150.000	52.590	48.949	-1.410	54.000	3.641	AV
3		5174.750	109.541	106.200	N/A	N/A	3.341	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5306.050	98.974	95.662	N/A	N/A	3.312	PK
2		5350.000	57.145	53.800	-16.855	74.000	3.344	PK
3	*	5359.750	58.108	54.820	-15.892	74.000	3.288	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310MHz	

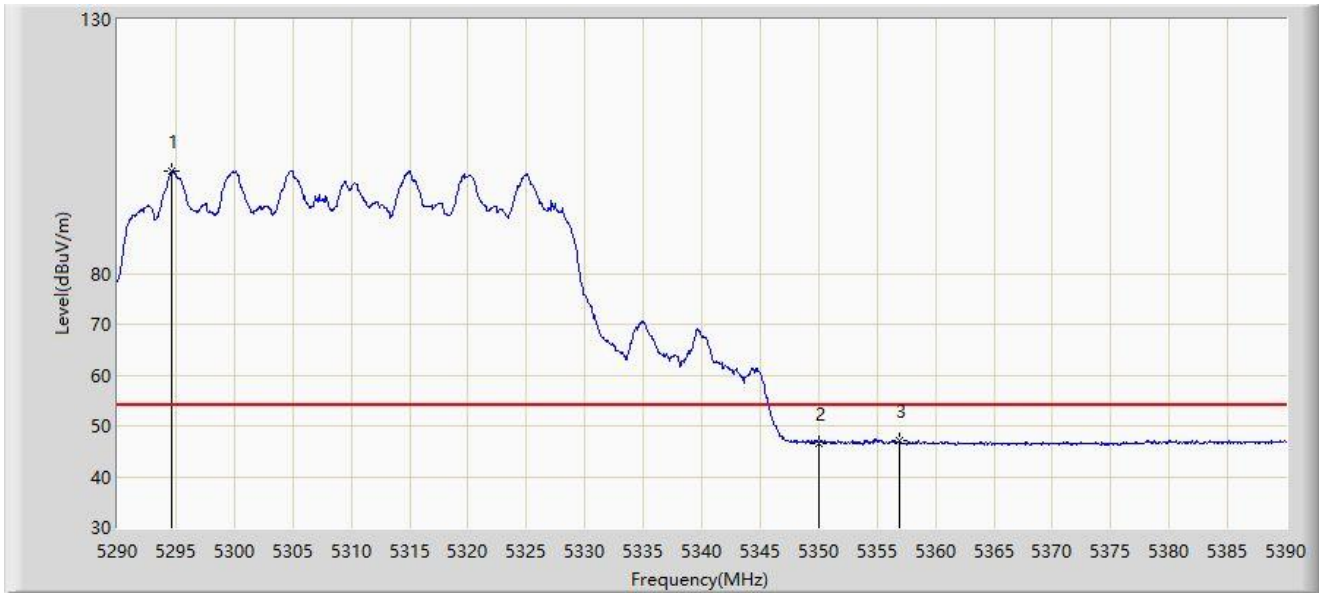


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5294.650	100.061	96.776	N/A	N/A	3.284	AV
2		5350.000	46.635	43.290	-7.365	54.000	3.344	AV
3	*	5356.900	47.153	43.856	-6.847	54.000	3.297	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310MHz	

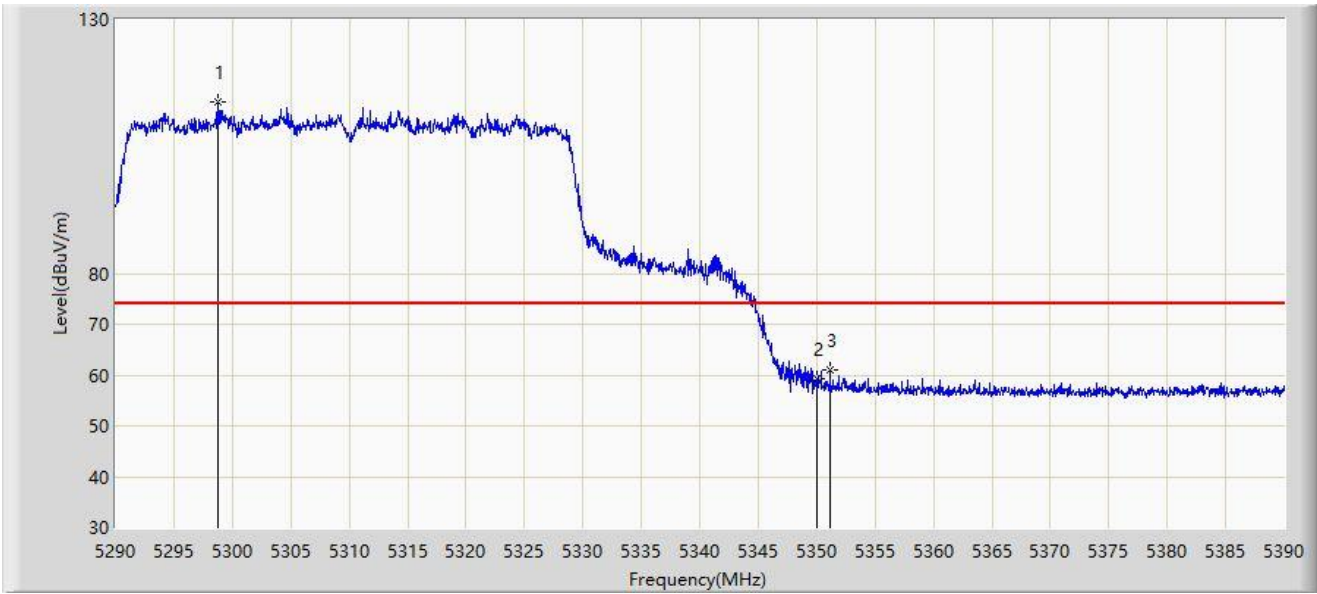


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5298.750	113.784	110.492	N/A	N/A	3.292	PK
2		5350.000	59.330	55.985	-14.670	74.000	3.344	PK
3	*	5351.150	60.933	57.608	-13.067	74.000	3.325	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310MHz	

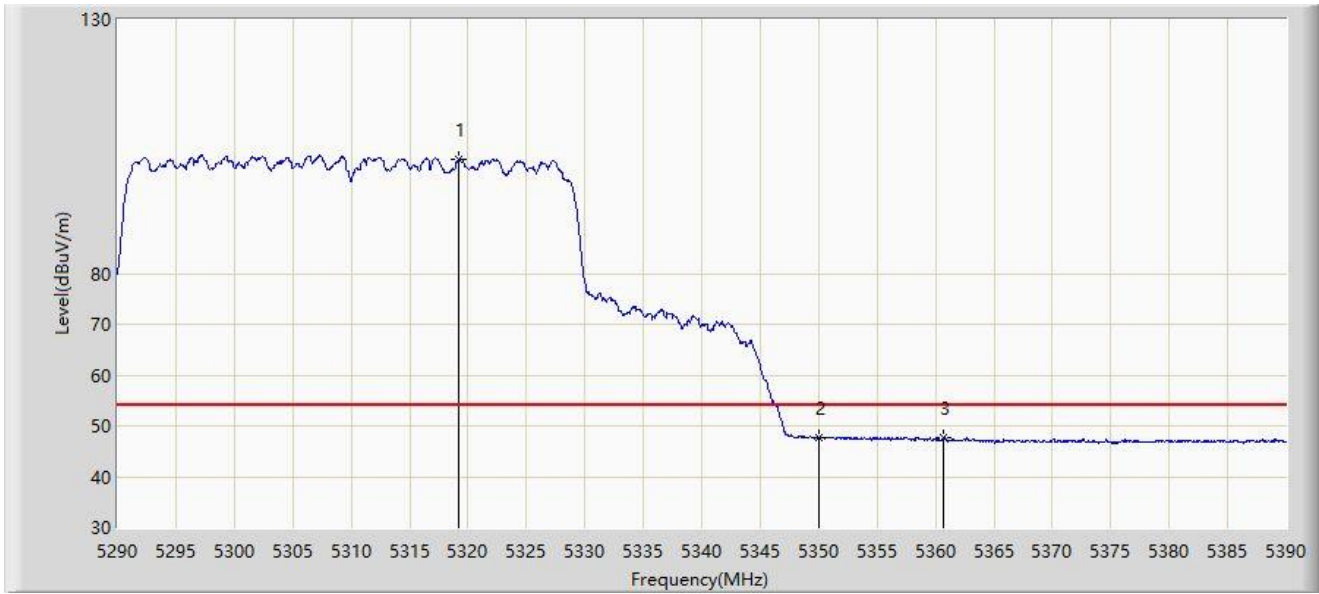


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5319.250	102.534	99.133	N/A	N/A	3.400	AV
2	*	5350.000	47.826	44.481	-6.174	54.000	3.344	AV
3		5360.700	47.716	44.430	-6.284	54.000	3.286	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5510MHz	

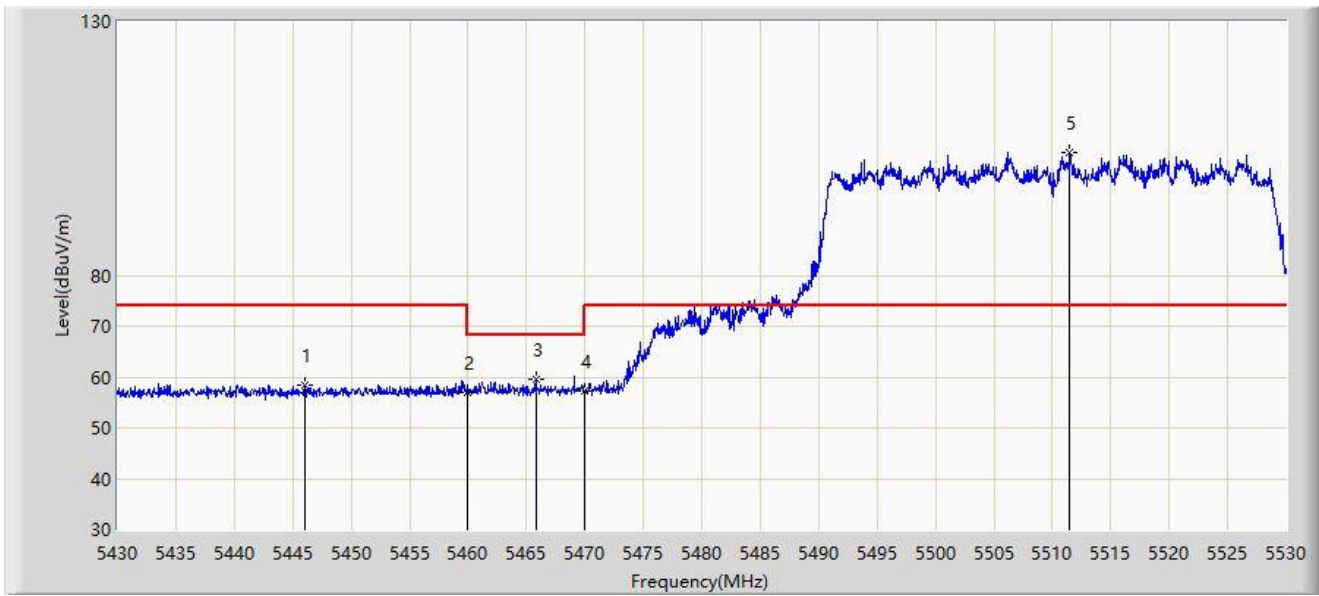


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5446.100	58.523	54.974	-15.477	74.000	3.549	PK
2		5460.000	57.048	53.418	-16.952	74.000	3.630	PK
3	*	5465.850	59.463	55.797	-8.737	68.200	3.665	PK
4		5470.000	57.215	53.524	-10.985	68.200	3.691	PK
5		5511.500	104.335	100.558	N/A	N/A	3.777	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

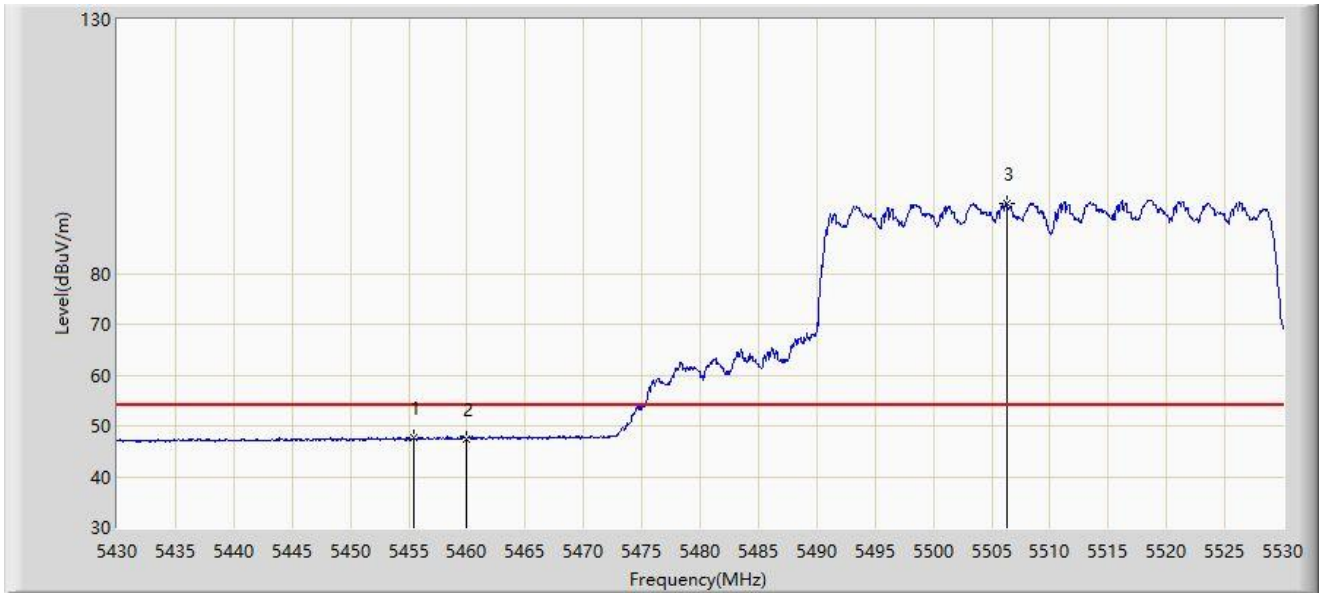


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5455.450	47.571	43.987	-6.429	54.000	3.584	AV
2		5460.000	47.528	43.898	-6.472	54.000	3.630	AV
3		5506.300	93.837	90.010	N/A	N/A	3.827	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5510MHz	

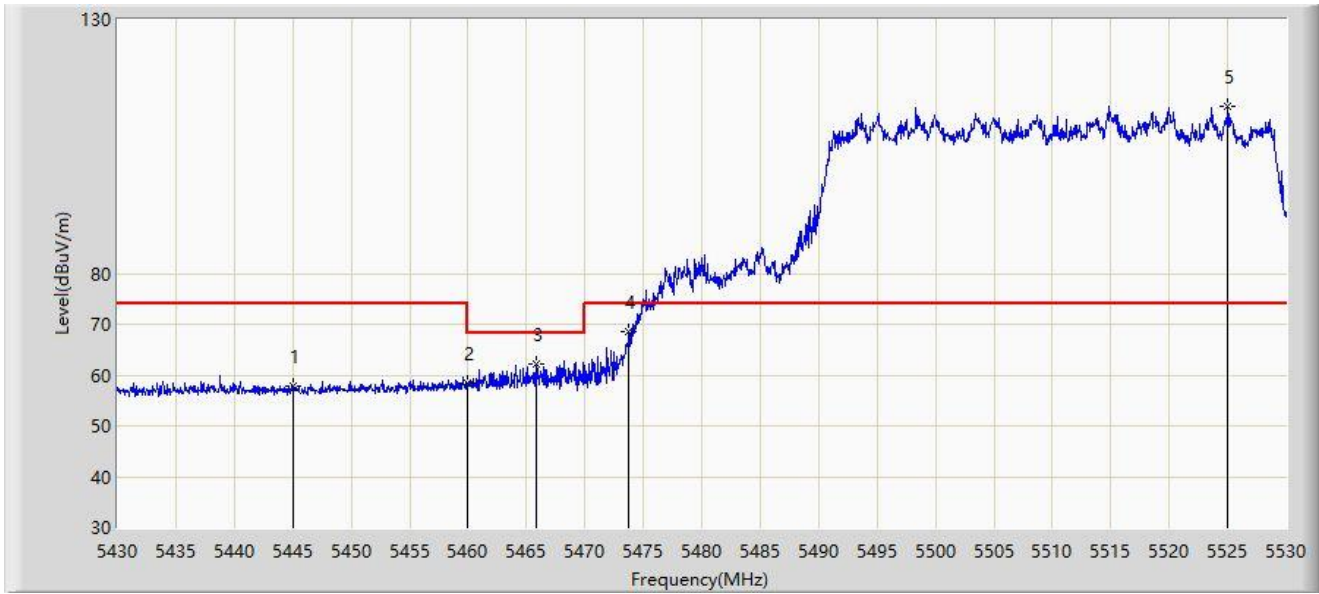

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5445.100	57.931	54.383	-16.069	74.000	3.547	PK
2		5460.000	58.394	54.764	-15.606	74.000	3.630	PK
3		5465.900	62.266	58.600	-5.934	68.200	3.666	PK
4	*	5473.750	68.417	64.718	-5.583	74.000	3.699	PK
5		5525.050	112.927	109.298	N/A	N/A	3.629	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

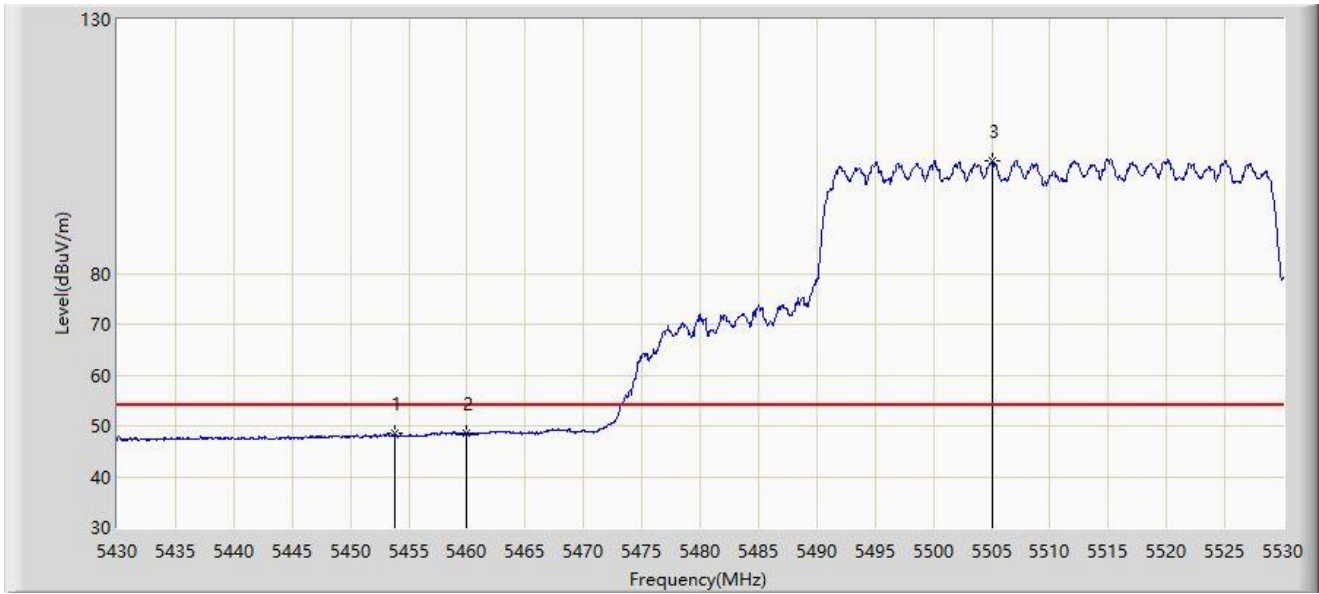


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5453.850	48.493	44.935	-5.507	54.000	3.558	AV
2	*	5460.000	48.644	45.014	-5.356	54.000	3.630	AV
3		5505.050	102.277	98.438	N/A	N/A	3.838	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5670MHz	

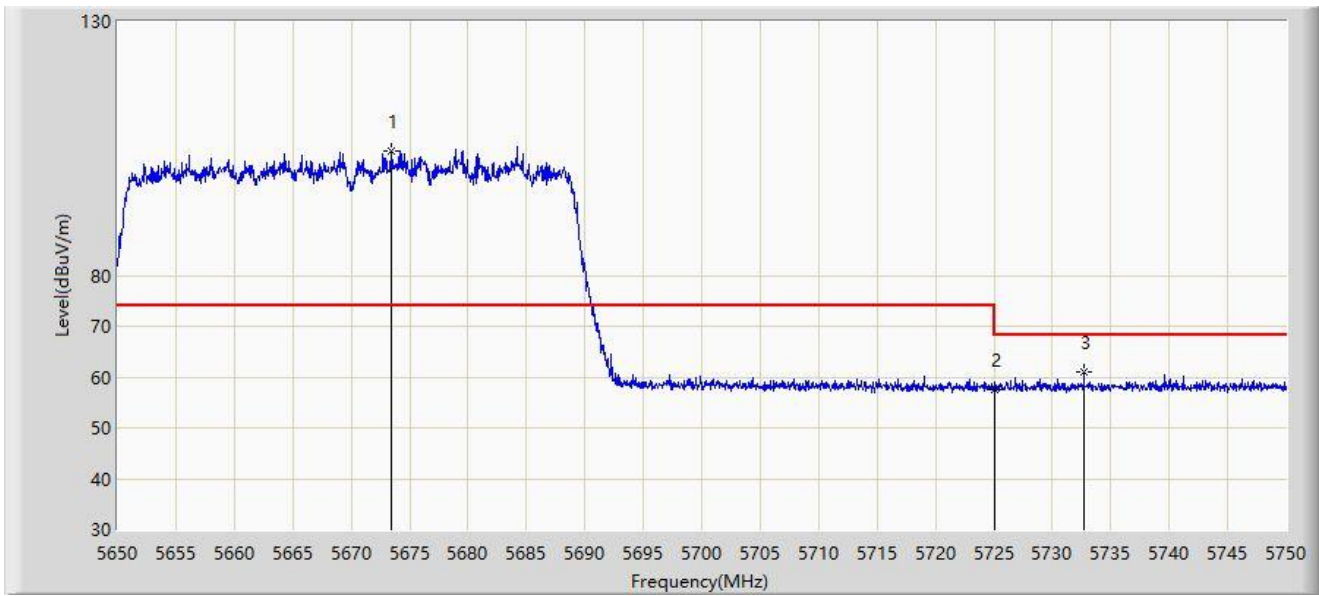


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5673.400	104.574	100.631	N/A	N/A	3.943	PK
2		5725.000	57.640	53.697	-10.560	68.200	3.943	PK
3	*	5732.700	60.937	56.907	-7.263	68.200	4.030	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5670MHz	

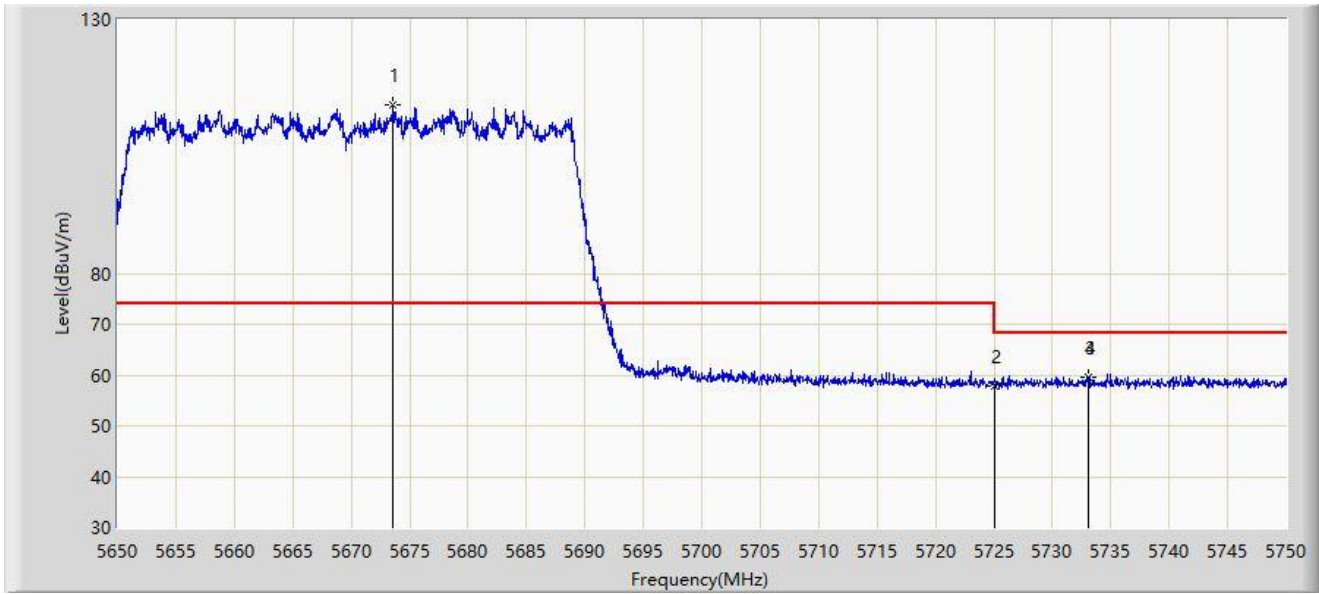


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5673.600	113.328	109.383	N/A	N/A	3.944	PK
2		5725.000	57.702	53.759	-10.498	68.200	3.943	PK
3	*	5733.100	59.674	55.639	-8.526	68.200	4.035	PK
4		5733.100	59.674	55.639	-8.526	68.200	4.035	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5755MHz	

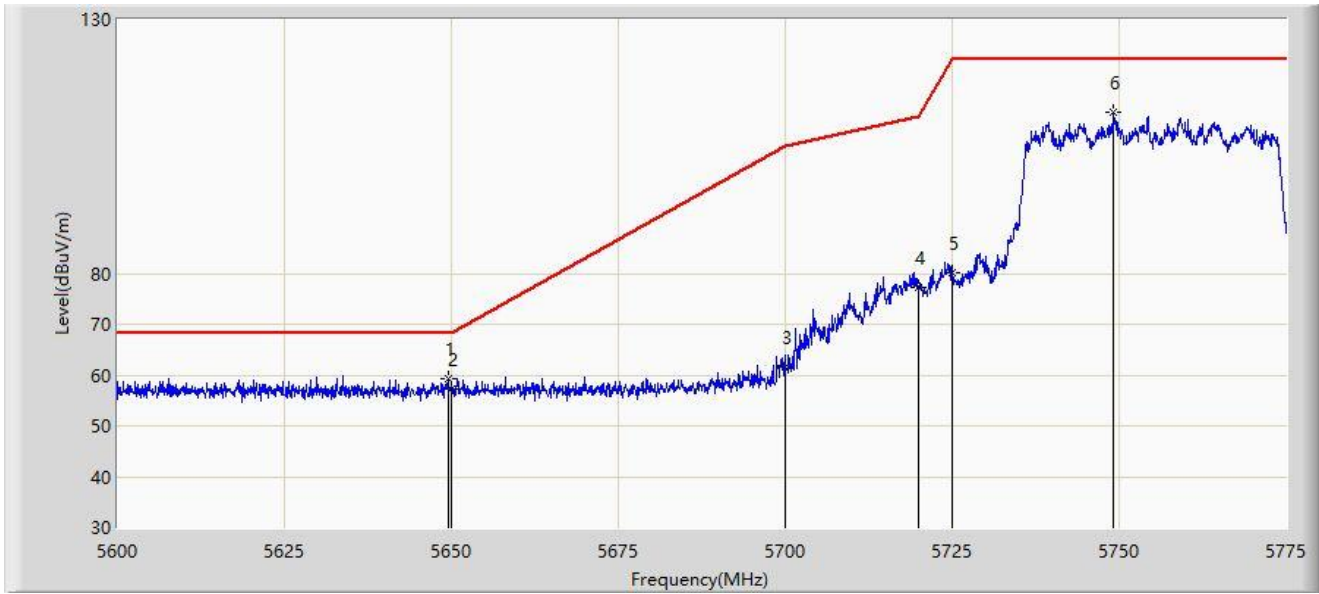


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5649.525	59.137	55.234	-9.063	68.200	3.903	PK
2		5650.000	57.112	53.198	-11.088	68.200	3.914	PK
3		5700.000	61.463	57.548	-43.737	105.200	3.916	PK
4		5720.000	77.160	73.231	-33.640	110.800	3.929	PK
5		5725.000	80.135	76.192	-42.065	122.200	3.943	PK
6		5749.187	111.783	107.598	N/A	N/A	4.185	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5755MHz	

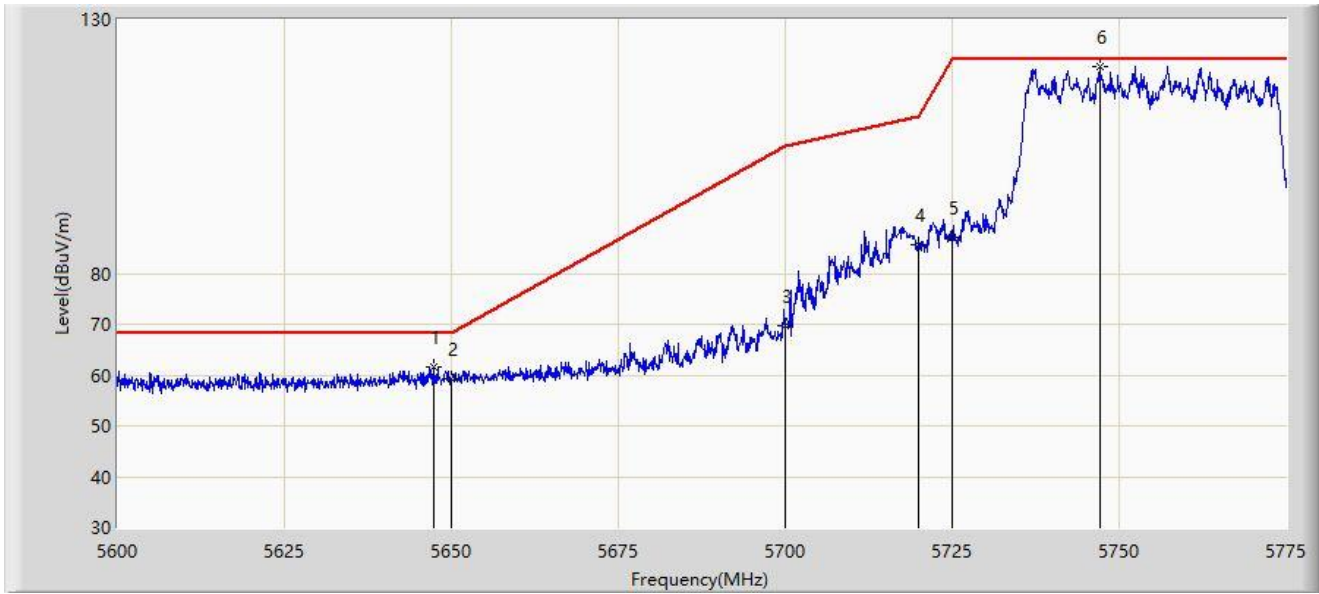


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.425	61.593	57.739	-6.607	68.200	3.854	PK
2		5650.000	59.165	55.251	-9.035	68.200	3.914	PK
3		5700.000	69.595	65.680	-35.605	105.200	3.916	PK
4		5720.000	85.640	81.711	-25.160	110.800	3.929	PK
5		5725.000	87.229	83.286	-34.971	122.200	3.943	PK
6		5747.087	120.640	116.464	N/A	N/A	4.176	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5795MHz	

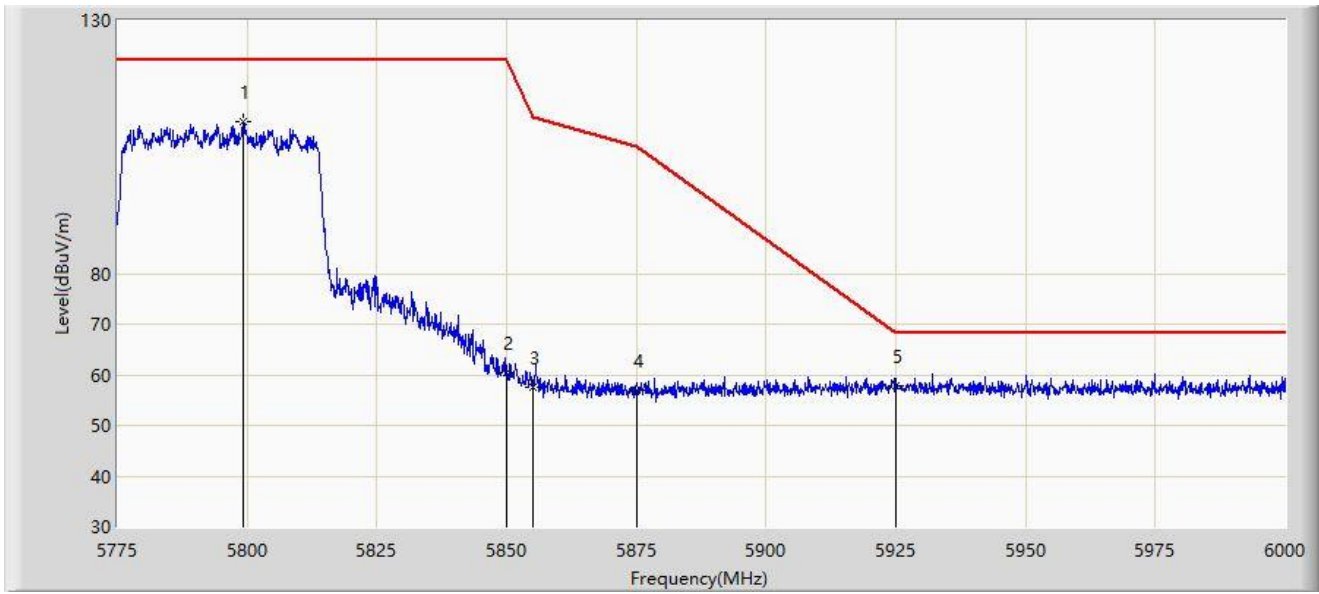


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5799.187	109.972	105.657	N/A	N/A	4.315	PK
2		5850.000	60.489	56.045	-61.711	122.200	4.444	PK
3		5855.000	57.551	53.151	-53.249	110.800	4.400	PK
4		5875.000	56.822	52.511	-48.378	105.200	4.312	PK
5	*	5925.000	57.898	53.267	-10.302	68.200	4.630	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-02-01
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE2400 Quad-Band Wi-Fi 7 Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5795MHz	

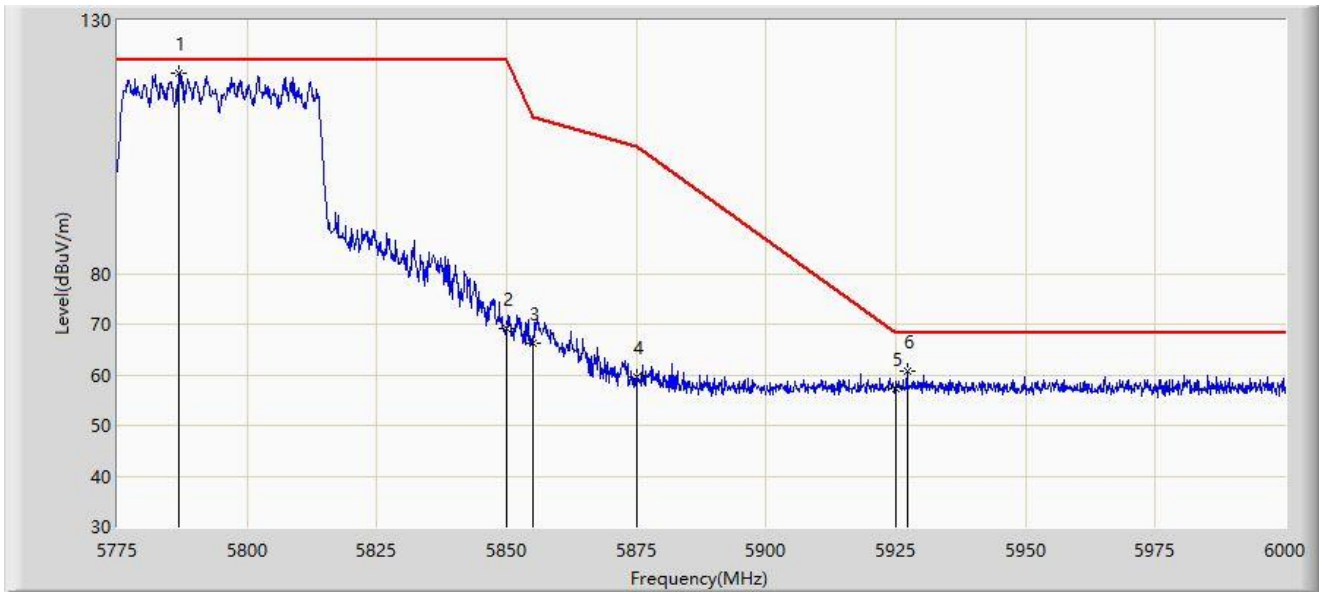

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5786.925	119.603	115.384	N/A	N/A	4.219	PK
2		5850.000	69.062	64.618	-53.138	122.200	4.444	PK
3		5855.000	66.286	61.886	-44.514	110.800	4.400	PK
4		5875.000	59.525	55.214	-45.675	105.200	4.312	PK
5		5925.000	57.385	52.754	-10.815	68.200	4.630	PK
6	*	5927.212	60.848	56.215	-7.352	68.200	4.633	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).