

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8412.0	39.9	8.6	48.5	74.0	-25.5	Peak	Horizontal
*	9899.5	36.7	12.7	49.4	68.2	-18.8	Peak	Horizontal
	11531.5	36.3	12.8	49.1	74.0	-24.9	Peak	Horizontal
*	13231.5	36.1	13.0	49.1	68.2	-19.1	Peak	Horizontal
*	10520.0	36.3	13.4	49.7	68.2	-18.5	Peak	Vertical
	11200.0	35.8	12.8	48.6	74.0	-25.4	Peak	Vertical
	13316.5	36.1	13.4	49.5	74.0	-24.5	Peak	Vertical
*	14608.5	35.3	15.0	50.3	68.2	-17.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8480.0	39.6	8.8	48.4	74.0	-25.6	Peak	Horizontal
*	10596.5	36.3	13.6	49.9	68.2	-18.3	Peak	Horizontal
	11497.5	36.1	13.3	49.4	74.0	-24.6	Peak	Horizontal
*	14234.5	34.8	14.7	49.5	68.2	-18.7	Peak	Horizontal
*	9891.0	35.5	12.7	48.2	68.2	-20.0	Peak	Vertical
	10953.5	35.9	13.5	49.4	74.0	-24.6	Peak	Vertical
	11438.0	36.2	13.0	49.2	74.0	-24.8	Peak	Vertical
*	14260.0	35.6	14.7	50.3	68.2	-17.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9704.0	35.8	12.6	48.4	68.2	-19.8	Peak	Horizontal
	11463.5	36.0	13.0	49.0	74.0	-25.0	Peak	Horizontal
	12534.5	35.8	11.8	47.6	74.0	-26.4	Peak	Horizontal
*	13996.5	35.6	14.0	49.6	68.2	-18.6	Peak	Horizontal
*	9908.0	35.0	12.7	47.7	68.2	-20.5	Peak	Vertical
	11098.0	36.3	13.3	49.6	74.0	-24.4	Peak	Vertical
*	13622.5	35.7	13.9	49.6	68.2	-18.6	Peak	Vertical
	14481.0	35.1	15.3	50.4	74.0	-23.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	35.1	12.9	48.0	68.2	-20.2	Peak	Horizontal
	10996.0	40.1	13.6	53.7	74.0	-20.3	Peak	Horizontal
	10996.0	38.8	13.6	52.4	54.0	-1.6	Average	Horizontal
	11854.5	36.0	12.4	48.4	74.0	-25.6	Peak	Horizontal
*	13988.0	35.9	13.9	49.8	68.2	-18.4	Peak	Horizontal
*	10452.0	36.3	13.3	49.6	68.2	-18.6	Peak	Vertical
	10996.0	39.7	13.6	53.3	74.0	-20.7	Peak	Vertical
	10996.0	39.6	13.6	53.2	54.0	-0.8	Average	Vertical
	13308.0	34.1	13.2	47.3	74.0	-26.7	Peak	Vertical
*	14455.5	35.1	15.0	50.1	68.2	-18.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	32.7	12.8	45.5	68.2	-22.7	Peak	Horizontal
*	10350.0	33.6	13.2	46.8	68.2	-21.4	Peak	Horizontal
	11157.5	41.9	13.1	55.0	74.0	-19.0	Peak	Horizontal
	11157.5	40.1	13.1	53.2	54.0	-0.8	Average	Horizontal
	12356.0	35.2	12.1	47.3	74.0	-26.7	Peak	Horizontal
*	9899.5	33.5	12.7	46.2	68.2	-22.0	Peak	Vertical
*	10214.0	34.0	12.9	46.9	68.2	-21.3	Peak	Vertical
	11157.5	40.0	13.1	53.1	74.0	-20.9	Peak	Vertical
	11582.5	32.9	12.6	45.5	74.0	-28.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11404.0	39.1	13.0	52.1	74.0	-21.9	Peak	Horizontal
	11404.0	38.2	13.0	51.2	54.0	-2.8	Average	Horizontal
	11846.0	34.1	12.2	46.3	74.0	-27.7	Peak	Horizontal
*	16886.5	36.8	14.9	51.7	68.2	-16.5	Peak	Horizontal
*	17099.0	34.7	15.0	49.7	68.2	-18.5	Peak	Horizontal
*	10035.5	35.8	12.8	48.6	68.2	-19.6	Peak	Vertical
*	10443.5	33.5	13.3	46.8	68.2	-21.4	Peak	Vertical
	11404.0	38.3	13.0	51.3	74.0	-22.7	Peak	Vertical
	11880.0	36.2	12.1	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	34.8	12.7	47.5	68.2	-20.7	Peak	Horizontal
*	10350.0	32.7	13.2	45.9	68.2	-22.3	Peak	Horizontal
	11438.0	38.7	13.0	51.7	74.0	-22.3	Peak	Horizontal
	11438.0	37.3	13.0	50.3	54.0	-3.7	Average	Horizontal
	12007.5	33.3	12.3	45.6	74.0	-28.4	Peak	Horizontal
	11438.0	37.1	13.0	50.1	74.0	-23.9	Peak	Vertical
	12220.0	33.5	12.2	45.7	74.0	-28.3	Peak	Vertical
*	12891.5	34.2	12.6	46.8	68.2	-21.4	Peak	Vertical
*	15084.5	37.1	14.0	51.1	68.2	-17.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11514.5	35.7	13.0	48.7	74.0	-25.3	Peak	Horizontal
	11735.5	34.8	12.0	46.8	74.0	-27.2	Peak	Horizontal
*	13792.5	34.5	13.9	48.4	68.2	-19.8	Peak	Horizontal
*	14234.5	35.3	14.7	50.0	68.2	-18.2	Peak	Horizontal
*	9993.0	35.7	12.8	48.5	68.2	-19.7	Peak	Vertical
*	10537.0	38.3	13.3	51.6	68.2	-16.6	Peak	Vertical
	11030.0	35.8	13.4	49.2	74.0	-24.8	Peak	Vertical
	11897.0	34.9	12.1	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	34.4	12.6	47.0	68.2	-21.2	Peak	Horizontal
*	10120.5	35.2	12.8	48.0	68.2	-20.2	Peak	Horizontal
	10622.0	37.1	13.3	50.4	74.0	-23.6	Peak	Horizontal
	11684.5	34.9	12.2	47.1	74.0	-26.9	Peak	Horizontal
*	9857.0	35.1	12.6	47.7	68.2	-20.5	Peak	Vertical
*	10214.0	34.9	12.9	47.8	68.2	-20.4	Peak	Vertical
	10970.5	35.1	13.4	48.5	74.0	-25.5	Peak	Vertical
	11514.5	36.5	13.0	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	11021.5	41.3	13.4	54.7	74.0	-19.3	Peak	Horizontal
	11021.5	35.4	13.4	48.8	54.0	-5.2	Average	Horizontal
	11786.5	35.3	12.0	47.3	74.0	-26.7	Peak	Horizontal
*	13733.0	34.4	13.8	48.2	68.2	-20.0	Peak	Horizontal
*	15059.0	37.4	14.3	51.7	68.2	-16.5	Peak	Horizontal
	11021.5	39.9	13.4	53.3	74.0	-20.7	Peak	Vertical
	11021.5	33.6	13.4	47.0	54.0	-7.0	Average	Vertical
	12220.0	34.3	12.2	46.5	74.0	-27.5	Peak	Vertical
*	13852.0	35.1	13.7	48.8	68.2	-19.4	Peak	Vertical
*	15016.5	34.1	13.9	48.0	68.2	-20.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	11098.0	42.2	13.3	55.5	74.0	-18.5	Peak	Horizontal
	11098.0	36.3	13.3	49.6	54.0	-4.4	Average	Horizontal
	11735.5	34.6	12.0	46.6	74.0	-27.4	Peak	Horizontal
*	13614.0	36.7	13.9	50.6	68.2	-17.6	Peak	Horizontal
*	14957.0	35.4	14.5	49.9	68.2	-18.3	Peak	Horizontal
*	9814.5	34.2	12.9	47.1	68.2	-21.1	Peak	Vertical
*	10171.5	34.8	13.0	47.8	68.2	-20.4	Peak	Vertical
	11098.0	40.0	13.3	53.3	74.0	-20.7	Peak	Vertical
	11098.0	34.2	13.3	47.5	54.0	-6.5	Average	Vertical
	11786.5	36.0	12.0	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	34.3	12.8	47.1	68.2	-21.1	Peak	Horizontal
*	10494.5	34.0	13.4	47.4	68.2	-20.8	Peak	Horizontal
	11336.0	40.2	12.7	52.9	74.0	-21.1	Peak	Horizontal
	11336.0	34.4	12.7	47.1	54.0	-6.9	Average	Horizontal
	11897.0	34.5	12.1	46.6	74.0	-27.4	Peak	Horizontal
*	10214.0	34.2	12.9	47.1	68.2	-21.1	Peak	Vertical
	11336.0	38.2	12.7	50.9	74.0	-23.1	Peak	Vertical
	11786.5	34.7	12.0	46.7	74.0	-27.3	Peak	Vertical
*	14200.5	36.5	14.6	51.1	68.2	-17.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	33.1	12.6	45.7	68.2	-22.5	Peak	Horizontal
*	10350.0	34.1	13.2	47.3	68.2	-20.9	Peak	Horizontal
	11421.0	39.8	12.9	52.7	74.0	-21.3	Peak	Horizontal
	11421.0	34.5	12.9	47.4	54.0	-6.6	Average	Horizontal
	12220.0	33.5	12.2	45.7	74.0	-28.3	Peak	Horizontal
*	9772.0	34.2	12.6	46.8	68.2	-21.4	Peak	Vertical
*	10307.5	35.3	13.0	48.3	68.2	-19.9	Peak	Vertical
	11421.0	37.8	12.9	50.7	74.0	-23.3	Peak	Vertical
	11948.0	34.9	12.1	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10214.0	33.9	12.9	46.8	68.2	-21.4	Peak	Horizontal
*	10579.5	38.5	13.6	52.1	68.2	-16.1	Peak	Horizontal
	11259.5	35.9	12.7	48.6	74.0	-25.4	Peak	Horizontal
	11786.5	35.0	12.0	47.0	74.0	-27.0	Peak	Horizontal
*	9993.0	32.9	12.8	45.7	68.2	-22.5	Peak	Vertical
*	10494.5	34.9	13.4	48.3	68.2	-19.9	Peak	Vertical
	11412.5	36.6	12.9	49.5	74.0	-24.5	Peak	Vertical
	12109.5	34.2	12.1	46.3	74.0	-27.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	33.6	12.8	46.4	68.2	-21.8	Peak	Horizontal
*	10401.0	33.6	13.2	46.8	68.2	-21.4	Peak	Horizontal
	11064.0	40.5	13.3	53.8	74.0	-20.2	Peak	Horizontal
	11064.0	38.4	13.3	51.7	54.0	-2.3	Average	Horizontal
	11633.5	35.4	12.4	47.8	74.0	-26.2	Peak	Horizontal
*	9882.5	35.5	12.8	48.3	68.2	-19.9	Peak	Vertical
	11064.0	39.5	13.3	52.8	74.0	-21.2	Peak	Vertical
	11064.0	37.2	13.3	50.5	54.0	-3.5	Average	Vertical
*	13622.5	36.6	13.9	50.5	68.2	-17.7	Peak	Vertical
	14481.0	35.8	15.3	51.1	74.0	-22.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	35.4	12.6	48.0	68.2	-20.2	Peak	Horizontal
*	10265.0	35.2	13.1	48.3	68.2	-19.9	Peak	Horizontal
	11217.0	37.4	12.5	49.9	74.0	-24.1	Peak	Horizontal
	11786.5	35.0	12.0	47.0	74.0	-27.0	Peak	Horizontal
*	9899.5	35.0	12.7	47.7	68.2	-20.5	Peak	Vertical
*	10350.0	33.7	13.2	46.9	68.2	-21.3	Peak	Vertical
	11217.0	38.7	12.5	51.2	74.0	-22.8	Peak	Vertical
	11217.0	36.1	12.5	48.6	54.0	-5.4	Average	Vertical
	11735.5	34.5	12.0	46.5	74.0	-27.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT80 – Channel 138
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	34.1	12.8	46.9	68.2	-21.3	Peak	Horizontal
*	10265.0	34.1	13.1	47.2	68.2	-21.0	Peak	Horizontal
	11140.5	37.0	12.9	49.9	74.0	-24.1	Peak	Horizontal
	11735.5	34.2	12.0	46.2	74.0	-27.8	Peak	Horizontal
	11378.5	37.3	12.8	50.1	74.0	-23.9	Peak	Vertical
	12330.5	34.1	12.0	46.1	74.0	-27.9	Peak	Vertical
*	14906.0	37.1	14.4	51.5	68.2	-16.7	Peak	Vertical
*	16827.0	36.6	15.1	51.7	68.2	-16.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	36.4	12.6	49.0	68.2	-19.2	Peak	Horizontal
*	10503.0	37.4	13.3	50.7	68.2	-17.5	Peak	Horizontal
	11455.0	36.2	13.0	49.2	74.0	-24.8	Peak	Horizontal
	12381.5	35.0	11.8	46.8	74.0	-27.2	Peak	Horizontal
*	9857.0	33.7	12.6	46.3	68.2	-21.9	Peak	Vertical
*	10443.5	33.8	13.3	47.1	68.2	-21.1	Peak	Vertical
	11021.5	36.1	13.4	49.5	74.0	-24.5	Peak	Vertical
	11548.5	35.8	13.0	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ac-VHT160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	35.3	12.8	48.1	68.2	-20.1	Peak	Horizontal
*	10401.0	35.3	13.2	48.5	68.2	-19.7	Peak	Horizontal
	11455.0	37.0	13.0	50.0	74.0	-24.0	Peak	Horizontal
	11846.0	35.8	12.2	48.0	74.0	-26.0	Peak	Horizontal
*	9993.0	35.3	12.8	48.1	68.2	-20.1	Peak	Vertical
*	10443.5	35.5	13.3	48.8	68.2	-19.4	Peak	Vertical
	11098.0	36.6	13.3	49.9	74.0	-24.1	Peak	Vertical
	11455.0	36.9	13.0	49.9	74.0	-24.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9729.5	36.0	12.7	48.7	68.2	-19.5	Peak	Horizontal
*	10520.0	37.2	13.4	50.6	68.2	-17.6	Peak	Horizontal
	10987.5	35.4	13.6	49.0	74.0	-25.0	Peak	Horizontal
	11480.5	35.9	13.0	48.9	74.0	-25.1	Peak	Horizontal
*	9993.0	35.4	12.8	48.2	68.2	-20.0	Peak	Vertical
*	10503.0	36.4	13.3	49.7	68.2	-18.5	Peak	Vertical
	10979.0	35.4	13.4	48.8	74.0	-25.2	Peak	Vertical
	11557.0	35.8	12.8	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	34.5	12.8	47.3	68.2	-20.9	Peak	Horizontal
*	10596.5	36.3	13.6	49.9	68.2	-18.3	Peak	Horizontal
	11506.0	36.2	13.2	49.4	74.0	-24.6	Peak	Horizontal
	11914.0	36.7	12.2	48.9	74.0	-25.1	Peak	Horizontal
*	9814.5	35.4	12.9	48.3	68.2	-19.9	Peak	Vertical
*	10588.0	35.6	13.6	49.2	68.2	-19.0	Peak	Vertical
	10928.0	34.6	13.5	48.1	74.0	-25.9	Peak	Vertical
	11489.0	36.4	13.2	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	34.6	12.7	47.3	68.2	-20.9	Peak	Horizontal
*	10120.5	34.3	12.8	47.1	68.2	-21.1	Peak	Horizontal
	10715.5	37.0	13.4	50.4	74.0	-23.6	Peak	Horizontal
	11540.0	36.9	12.9	49.8	74.0	-24.2	Peak	Horizontal
*	9619.0	37.5	12.1	49.6	68.2	-18.6	Peak	Vertical
*	10197.0	35.8	13.0	48.8	68.2	-19.4	Peak	Vertical
	10996.0	35.6	13.6	49.2	74.0	-24.8	Peak	Vertical
	11778.0	36.3	12.1	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	34.3	12.7	47.0	68.2	-21.2	Peak	Horizontal
*	10214.0	33.9	12.9	46.8	68.2	-21.4	Peak	Horizontal
	10996.0	39.3	13.6	52.9	74.0	-21.1	Peak	Horizontal
	10996.0	36.3	13.6	49.9	54.0	-4.1	Average	Horizontal
	11956.5	36.2	12.2	48.4	74.0	-25.6	Peak	Horizontal
	10996.0	40.1	13.6	53.7	74.0	-20.3	Peak	Vertical
	10996.0	36.8	13.6	50.4	54.0	-3.6	Average	Vertical
	11523.0	35.3	12.9	48.2	74.0	-25.8	Peak	Vertical
*	14166.5	34.9	14.6	49.5	68.2	-18.7	Peak	Vertical
*	16929.0	37.2	15.1	52.3	68.2	-15.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	34.2	12.6	46.8	68.2	-21.4	Peak	Horizontal
*	10494.5	34.3	13.4	47.7	68.2	-20.5	Peak	Horizontal
	11157.5	41.2	13.1	54.3	74.0	-19.7	Peak	Horizontal
	11157.5	37.2	13.1	50.3	54.0	-3.7	Average	Horizontal
	11820.5	35.9	12.0	47.9	74.0	-26.1	Peak	Horizontal
*	9857.0	34.5	12.6	47.1	68.2	-21.1	Peak	Vertical
*	10307.5	34.5	13.0	47.5	68.2	-20.7	Peak	Vertical
	11157.5	39.1	13.1	52.2	74.0	-21.8	Peak	Vertical
	11157.5	36.1	13.1	49.2	54.0	-4.8	Average	Vertical
	12007.5	35.0	12.3	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	34.2	12.6	46.8	68.2	-21.4	Peak	Horizontal
*	10120.5	34.2	12.8	47.0	68.2	-21.2	Peak	Horizontal
	10783.5	33.5	13.4	46.9	74.0	-27.1	Peak	Horizontal
	11404.0	39.6	13.0	52.6	74.0	-21.4	Peak	Horizontal
	11404.0	36.3	13.0	49.3	54.0	-4.7	Average	Horizontal
*	10035.5	34.8	12.8	47.6	68.2	-20.6	Peak	Vertical
*	10537.0	35.7	13.3	49.0	68.2	-19.2	Peak	Vertical
	11072.5	35.7	13.3	49.0	74.0	-25.0	Peak	Vertical
	11752.5	36.2	12.2	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	33.9	12.8	46.7	68.2	-21.5	Peak	Horizontal
*	10443.5	35.6	13.3	48.9	68.2	-19.3	Peak	Horizontal
	11438.0	39.4	13.0	52.4	74.0	-21.6	Peak	Horizontal
	12024.5	36.8	12.2	49.0	74.0	-25.0	Peak	Horizontal
*	9899.5	35.7	12.7	48.4	68.2	-19.8	Peak	Vertical
*	10443.5	35.4	13.3	48.7	68.2	-19.5	Peak	Vertical
	11948.0	36.1	12.1	48.2	74.0	-25.8	Peak	Vertical
	13342.0	36.9	13.4	50.3	74.0	-23.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	34.2	12.7	46.9	68.2	-21.3	Peak	Horizontal
*	10537.0	37.6	13.3	50.9	68.2	-17.3	Peak	Horizontal
	11608.0	36.7	12.7	49.4	74.0	-24.6	Peak	Horizontal
	12033.0	35.6	12.1	47.7	74.0	-26.3	Peak	Horizontal
*	9678.5	35.2	12.6	47.8	68.2	-20.4	Peak	Vertical
*	10120.5	34.6	12.8	47.4	68.2	-20.8	Peak	Vertical
	11344.5	35.8	12.8	48.6	74.0	-25.4	Peak	Vertical
	11633.5	34.9	12.4	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	33.9	12.8	46.7	68.2	-21.5	Peak	Horizontal
*	10307.5	34.7	13.0	47.7	68.2	-20.5	Peak	Horizontal
	11140.5	36.7	12.9	49.6	74.0	-24.4	Peak	Horizontal
	11582.5	35.7	12.6	48.3	74.0	-25.7	Peak	Horizontal
*	10265.0	34.1	13.1	47.2	68.2	-21.0	Peak	Vertical
*	10596.5	36.5	13.6	50.1	68.2	-18.1	Peak	Vertical
	11378.5	34.2	12.8	47.0	74.0	-27.0	Peak	Vertical
	11684.5	34.2	12.2	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	35.7	12.6	48.3	68.2	-19.9	Peak	Horizontal
*	10401.0	35.8	13.2	49.0	68.2	-19.2	Peak	Horizontal
	11021.5	40.9	13.4	54.3	74.0	-19.7	Peak	Horizontal
	11021.5	36.4	13.4	49.8	54.0	-4.2	Average	Horizontal
	11480.5	35.6	13.0	48.6	74.0	-25.4	Peak	Horizontal
*	9899.5	35.4	12.7	48.1	68.2	-20.1	Peak	Vertical
*	10307.5	35.0	13.0	48.0	68.2	-20.2	Peak	Vertical
	11021.5	39.3	13.4	52.7	74.0	-21.3	Peak	Vertical
	11021.5	36.2	13.4	49.6	54.0	-4.4	Average	Vertical
	11472.0	37.5	13.0	50.5	74.0	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	34.0	12.6	46.6	68.2	-21.6	Peak	Horizontal
*	10307.5	34.9	13.0	47.9	68.2	-20.3	Peak	Horizontal
	11098.0	41.1	13.3	54.4	74.0	-19.6	Peak	Horizontal
	11098.0	38.0	13.3	51.3	54.0	-2.7	Average	Horizontal
	11897.0	35.0	12.1	47.1	74.0	-26.9	Peak	Horizontal
*	9899.5	34.0	12.7	46.7	68.2	-21.5	Peak	Vertical
*	10443.5	34.5	13.3	47.8	68.2	-20.4	Peak	Vertical
	11098.0	39.4	13.3	52.7	74.0	-21.3	Peak	Vertical
	11098.0	36.3	13.3	49.6	54.0	-4.4	Average	Vertical
	11582.5	34.3	12.6	46.9	74.0	-27.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	34.8	12.6	47.4	68.2	-20.8	Peak	Horizontal
*	10214.0	34.2	12.9	47.1	68.2	-21.1	Peak	Horizontal
	11336.0	41.2	12.7	53.9	74.0	-20.1	Peak	Horizontal
	11336.0	38.0	12.7	50.7	54.0	-3.3	Average	Horizontal
	11897.0	34.8	12.1	46.9	74.0	-27.1	Peak	Horizontal
*	9942.0	34.2	12.5	46.7	68.2	-21.5	Peak	Vertical
*	10307.5	35.0	13.0	48.0	68.2	-20.2	Peak	Vertical
	11336.0	37.9	12.7	50.6	74.0	-23.4	Peak	Vertical
	11863.0	36.4	12.3	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	34.5	12.6	47.1	68.2	-21.1	Peak	Horizontal
*	10350.0	34.5	13.2	47.7	68.2	-20.5	Peak	Horizontal
	11421.0	39.2	12.9	52.1	74.0	-21.9	Peak	Horizontal
	11421.0	36.3	12.9	49.2	54.0	-4.8	Average	Horizontal
	11735.5	34.6	12.0	46.6	74.0	-27.4	Peak	Horizontal
*	9993.0	34.1	12.8	46.9	68.2	-21.3	Peak	Vertical
*	10588.0	34.5	13.6	48.1	68.2	-20.1	Peak	Vertical
	10970.5	33.4	13.4	46.8	74.0	-27.2	Peak	Vertical
	11480.5	34.5	13.0	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	34.4	12.3	46.7	68.2	-21.5	Peak	Horizontal
*	10035.5	36.1	12.8	48.9	68.2	-19.3	Peak	Horizontal
	11047.0	36.9	13.7	50.6	74.0	-23.4	Peak	Horizontal
	11506.0	36.7	13.2	49.9	74.0	-24.1	Peak	Horizontal
*	9993.0	34.7	12.8	47.5	68.2	-20.7	Peak	Vertical
*	10579.5	37.1	13.6	50.7	68.2	-17.5	Peak	Vertical
	11225.5	35.6	12.4	48.0	74.0	-26.0	Peak	Vertical
	11973.5	36.9	12.2	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	34.2	12.8	47.0	68.2	-21.2	Peak	Horizontal
*	10401.0	33.6	13.2	46.8	68.2	-21.4	Peak	Horizontal
	11064.0	40.7	13.3	54.0	74.0	-20.0	Peak	Horizontal
	11064.0	39.0	13.3	52.3	54.0	-1.7	Average	Horizontal
	12058.5	34.2	12.3	46.5	74.0	-27.5	Peak	Horizontal
*	9772.0	34.3	12.6	46.9	68.2	-21.3	Peak	Vertical
*	10265.0	34.7	13.1	47.8	68.2	-20.4	Peak	Vertical
	11064.0	39.5	13.3	52.8	74.0	-21.2	Peak	Vertical
	11064.0	37.1	13.3	50.4	54.0	-3.6	Average	Vertical
	11531.5	35.1	12.8	47.9	74.0	-26.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	33.4	12.6	46.0	68.2	-22.2	Peak	Horizontal
*	10120.5	32.7	12.8	45.5	68.2	-22.7	Peak	Horizontal
	11217.0	42.1	12.5	54.6	74.0	-19.4	Peak	Horizontal
	11217.0	39.1	12.5	51.6	54.0	-2.4	Average	Horizontal
	12228.5	37.8	12.0	49.8	74.0	-24.2	Peak	Horizontal
*	10035.5	33.8	12.8	46.6	68.2	-21.6	Peak	Vertical
*	10494.5	34.5	13.4	47.9	68.2	-20.3	Peak	Vertical
	11217.0	37.9	12.5	50.4	74.0	-23.6	Peak	Vertical
	11948.0	34.5	12.1	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE80 – Channel 138
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	35.1	12.8	47.9	68.2	-20.3	Peak	Horizontal
	11021.5	37.0	13.4	50.4	74.0	-23.6	Peak	Horizontal
	11378.5	37.7	12.8	50.5	74.0	-23.5	Peak	Horizontal
*	13070.0	34.3	12.4	46.7	68.2	-21.5	Peak	Horizontal
*	9814.5	33.4	12.9	46.3	68.2	-21.9	Peak	Vertical
*	10078.0	33.3	12.8	46.1	68.2	-22.1	Peak	Vertical
	11378.5	36.3	12.8	49.1	74.0	-24.9	Peak	Vertical
	11786.5	33.9	12.0	45.9	74.0	-28.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE160 – Channel 50
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	35.6	12.6	48.2	68.2	-20.0	Peak	Horizontal
*	10350.0	33.8	13.2	47.0	68.2	-21.2	Peak	Horizontal
	11174.5	34.1	12.8	46.9	74.0	-27.1	Peak	Horizontal
	11948.0	34.7	12.1	46.8	74.0	-27.2	Peak	Horizontal
*	9993.0	33.9	12.8	46.7	68.2	-21.5	Peak	Vertical
*	10401.0	34.1	13.2	47.3	68.2	-20.9	Peak	Vertical
	11174.5	34.3	12.8	47.1	74.0	-26.9	Peak	Vertical
	12109.5	34.1	12.1	46.2	74.0	-27.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11ax-HE160 – Channel 114
Remark	5. Average measurement was not performed if peak level lower than average limit. 6. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	33.1	12.6	45.7	68.2	-22.5	Peak	Horizontal
*	10120.5	33.8	12.8	46.6	68.2	-21.6	Peak	Horizontal
	11140.5	41.8	12.9	54.7	74.0	-19.3	Peak	Horizontal
	11140.5	39.9	12.9	52.8	54.0	-1.2	Average	Horizontal
	11999.0	36.4	12.2	48.6	74.0	-25.4	Peak	Horizontal
*	9899.5	33.7	12.7	46.4	68.2	-21.8	Peak	Vertical
*	10078.0	35.0	12.8	47.8	68.2	-20.4	Peak	Vertical
	11140.5	38.4	12.9	51.3	74.0	-22.7	Peak	Vertical
	11582.5	34.4	12.6	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	35.0	12.7	47.7	68.2	-20.5	Peak	Horizontal
*	10265.0	34.4	13.1	47.5	68.2	-20.7	Peak	Horizontal
	11514.5	36.3	13.0	49.3	74.0	-24.7	Peak	Horizontal
	11897.0	35.5	12.1	47.6	74.0	-26.4	Peak	Horizontal
*	9857.0	33.2	12.6	45.8	68.2	-22.4	Peak	Vertical
*	10520.0	36.7	13.4	50.1	68.2	-18.1	Peak	Vertical
	11336.0	36.6	12.7	49.3	74.0	-24.7	Peak	Vertical
	11786.5	34.2	12.0	46.2	74.0	-27.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	33.6	12.7	46.3	68.2	-21.9	Peak	Horizontal
*	10171.5	35.1	13.0	48.1	68.2	-20.1	Peak	Horizontal
	10826.0	35.0	13.3	48.3	74.0	-25.7	Peak	Horizontal
	11735.5	35.9	12.0	47.9	74.0	-26.1	Peak	Horizontal
*	9993.0	33.6	12.8	46.4	68.2	-21.8	Peak	Vertical
*	10596.5	36.4	13.6	50.0	68.2	-18.2	Peak	Vertical
	11523.0	36.8	12.9	49.7	74.0	-24.3	Peak	Vertical
	11897.0	34.9	12.1	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9823.0	35.0	13.0	48.0	68.2	-20.2	Peak	Horizontal
*	10171.5	33.7	13.0	46.7	68.2	-21.5	Peak	Horizontal
	10639.0	37.1	13.5	50.6	74.0	-23.4	Peak	Horizontal
	11846.0	35.0	12.2	47.2	74.0	-26.8	Peak	Horizontal
*	9857.0	33.0	12.6	45.6	68.2	-22.6	Peak	Vertical
*	10120.5	33.3	12.8	46.1	68.2	-22.1	Peak	Vertical
	10639.0	36.8	13.5	50.3	74.0	-23.7	Peak	Vertical
	11327.5	33.7	12.7	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	33.4	12.5	45.9	68.2	-22.3	Peak	Horizontal
*	10350.0	34.6	13.2	47.8	68.2	-20.4	Peak	Horizontal
	10996.0	38.7	13.6	52.3	74.0	-21.7	Peak	Horizontal
	10996.0	36.4	13.6	50.0	54.0	-4.0	Average	Horizontal
	11480.5	36.5	13.0	49.5	74.0	-24.5	Peak	Horizontal
*	9993.0	33.6	12.8	46.4	68.2	-21.8	Peak	Vertical
*	10443.5	33.7	13.3	47.0	68.2	-21.2	Peak	Vertical
	10996.0	38.2	13.6	51.8	74.0	-22.2	Peak	Vertical
	10996.0	36.3	13.6	49.9	54.0	-4.1	Average	Vertical
	11429.5	33.5	12.9	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	34.6	12.6	47.2	68.2	-21.0	Peak	Horizontal
*	10265.0	34.7	13.1	47.8	68.2	-20.4	Peak	Horizontal
	11157.5	40.4	13.1	53.5	74.0	-20.5	Peak	Horizontal
	11157.5	37.6	13.1	50.7	54.0	-3.3	Average	Horizontal
	11684.5	34.6	12.2	46.8	74.0	-27.2	Peak	Horizontal
*	9942.0	34.5	12.5	47.0	68.2	-21.2	Peak	Vertical
*	10307.5	34.0	13.0	47.0	68.2	-21.2	Peak	Vertical
	11157.5	37.7	13.1	50.8	74.0	-23.2	Peak	Vertical
	11735.5	33.8	12.0	45.8	74.0	-28.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	33.6	12.8	46.4	68.2	-21.8	Peak	Horizontal
*	10443.5	33.2	13.3	46.5	68.2	-21.7	Peak	Horizontal
	10970.5	34.7	13.4	48.1	74.0	-25.9	Peak	Horizontal
	11404.0	38.9	13.0	51.9	74.0	-22.1	Peak	Horizontal
	11404.0	36.1	13.0	49.1	54.0	-4.9	Average	Horizontal
*	9814.5	34.0	12.9	46.9	68.2	-21.3	Peak	Vertical
*	10188.5	34.3	13.2	47.5	68.2	-20.7	Peak	Vertical
	10681.5	35.3	13.5	48.8	74.0	-25.2	Peak	Vertical
	11404.0	37.1	13.0	50.1	74.0	-23.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	33.6	12.5	46.1	68.2	-22.1	Peak	Horizontal
*	10307.5	34.4	13.0	47.4	68.2	-20.8	Peak	Horizontal
	11149.0	35.5	13.1	48.6	74.0	-25.4	Peak	Horizontal
	11897.0	34.3	12.1	46.4	74.0	-27.6	Peak	Horizontal
*	9721.0	34.5	12.7	47.2	68.2	-21.0	Peak	Vertical
*	10078.0	34.6	12.8	47.4	68.2	-20.8	Peak	Vertical
	10877.0	34.8	13.4	48.2	74.0	-25.8	Peak	Vertical
	11438.0	36.7	13.0	49.7	74.0	-24.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	33.9	12.9	46.8	68.2	-21.4	Peak	Horizontal
*	10537.0	37.2	13.3	50.5	68.2	-17.7	Peak	Horizontal
	11378.5	33.5	12.8	46.3	74.0	-27.7	Peak	Horizontal
	11982.0	35.6	12.2	47.8	74.0	-26.2	Peak	Horizontal
*	9721.0	33.2	12.7	45.9	68.2	-22.3	Peak	Vertical
*	10307.5	33.4	13.0	46.4	68.2	-21.8	Peak	Vertical
	11047.0	35.2	13.7	48.9	74.0	-25.1	Peak	Vertical
	11735.5	33.2	12.0	45.2	74.0	-28.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9551.0	33.8	11.9	45.7	68.2	-22.5	Peak	Horizontal
*	10078.0	34.4	12.8	47.2	68.2	-21.0	Peak	Horizontal
	10928.0	35.9	13.5	49.4	74.0	-24.6	Peak	Horizontal
	11897.0	34.1	12.1	46.2	74.0	-27.8	Peak	Horizontal
*	10035.5	33.7	12.8	46.5	68.2	-21.7	Peak	Vertical
*	10443.5	33.6	13.3	46.9	68.2	-21.3	Peak	Vertical
	10715.5	36.7	13.4	50.1	74.0	-23.9	Peak	Vertical
	11429.5	33.5	12.9	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	33.5	12.6	46.1	68.2	-22.1	Peak	Horizontal
*	10350.0	33.1	13.2	46.3	68.2	-21.9	Peak	Horizontal
	11021.5	40.0	13.4	53.4	74.0	-20.6	Peak	Horizontal
	11021.5	38.3	13.4	51.7	54.0	-2.3	Average	Horizontal
	12109.5	34.0	12.1	46.1	74.0	-27.9	Peak	Horizontal
*	10171.5	33.9	13.0	46.9	68.2	-21.3	Peak	Vertical
*	10443.5	33.8	13.3	47.1	68.2	-21.1	Peak	Vertical
	11021.5	37.9	13.4	51.3	74.0	-22.7	Peak	Vertical
	11897.0	34.0	12.1	46.1	74.0	-27.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	34.7	12.7	47.4	68.2	-20.8	Peak	Horizontal
*	10265.0	33.4	13.1	46.5	68.2	-21.7	Peak	Horizontal
	11098.0	40.3	13.3	53.6	74.0	-20.4	Peak	Horizontal
	11098.0	39.0	13.3	52.3	54.0	-1.7	Average	Horizontal
	11735.5	35.4	12.0	47.4	74.0	-26.6	Peak	Horizontal
*	9814.5	34.1	12.9	47.0	68.2	-21.2	Peak	Vertical
*	10214.0	34.2	12.9	47.1	68.2	-21.1	Peak	Vertical
	11098.0	39.1	13.3	52.4	74.0	-21.6	Peak	Vertical
	11098.0	37.7	13.3	51.0	54.0	-3.0	Average	Vertical
	11531.5	34.5	12.8	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	34.4	12.9	47.3	68.2	-20.9	Peak	Horizontal
*	10078.0	33.5	12.8	46.3	68.2	-21.9	Peak	Horizontal
	11336.0	40.3	12.7	53.0	74.0	-21.0	Peak	Horizontal
	11336.0	38.2	12.7	50.9	54.0	-3.1	Average	Horizontal
	11616.5	37.0	12.6	49.6	74.0	-24.4	Peak	Horizontal
*	9899.5	34.6	12.7	47.3	68.2	-20.9	Peak	Vertical
*	10214.0	34.5	12.9	47.4	68.2	-20.8	Peak	Vertical
	10996.0	35.4	13.6	49.0	74.0	-25.0	Peak	Vertical
	11531.5	33.9	12.8	46.7	74.0	-27.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	33.9	12.6	46.5	68.2	-21.7	Peak	Horizontal
*	10443.5	33.6	13.3	46.9	68.2	-21.3	Peak	Horizontal
	11421.0	39.0	12.9	51.9	74.0	-22.1	Peak	Horizontal
	11421.0	36.3	12.9	49.2	54.0	-4.8	Average	Horizontal
	12007.5	34.5	12.3	46.8	74.0	-27.2	Peak	Horizontal
*	9899.5	34.0	12.7	46.7	68.2	-21.5	Peak	Vertical
*	10214.0	34.0	12.9	46.9	68.2	-21.3	Peak	Vertical
	10996.0	35.6	13.6	49.2	74.0	-24.8	Peak	Vertical
	11429.5	35.1	12.9	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	34.8	12.8	47.6	68.2	-20.6	Peak	Horizontal
*	10401.0	34.8	13.2	48.0	68.2	-20.2	Peak	Horizontal
	11242.5	36.9	12.7	49.6	74.0	-24.4	Peak	Horizontal
	11582.5	34.5	12.6	47.1	74.0	-26.9	Peak	Horizontal
*	9942.0	33.6	12.5	46.1	68.2	-22.1	Peak	Vertical
*	10350.0	33.0	13.2	46.2	68.2	-22.0	Peak	Vertical
	11106.5	35.5	13.1	48.6	74.0	-25.4	Peak	Vertical
	11531.5	33.6	12.8	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	33.1	12.8	45.9	68.2	-22.3	Peak	Horizontal
*	10443.5	33.3	13.3	46.6	68.2	-21.6	Peak	Horizontal
	11064.0	40.2	13.3	53.5	74.0	-20.5	Peak	Horizontal
	11064.0	39.6	13.3	52.9	54.0	-1.1	Average	Horizontal
	11897.0	34.1	12.1	46.2	74.0	-27.8	Peak	Horizontal
*	9814.5	33.9	12.9	46.8	68.2	-21.4	Peak	Vertical
*	10307.5	33.1	13.0	46.1	68.2	-22.1	Peak	Vertical
	11064.0	38.2	13.3	51.5	74.0	-22.5	Peak	Vertical
	11064.0	37.1	13.3	50.4	54.0	-3.6	Average	Vertical
	11948.0	34.9	12.1	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	33.5	12.9	46.4	68.2	-21.8	Peak	Horizontal
*	10171.5	32.6	13.0	45.6	68.2	-22.6	Peak	Horizontal
	11217.0	40.6	12.5	53.1	74.0	-20.9	Peak	Horizontal
	11217.0	38.3	12.5	50.8	54.0	-3.2	Average	Horizontal
	12169.0	34.6	12.2	46.8	74.0	-27.2	Peak	Horizontal
*	9942.0	33.7	12.5	46.2	68.2	-22.0	Peak	Vertical
*	10401.0	33.0	13.2	46.2	68.2	-22.0	Peak	Vertical
	11217.0	36.6	12.5	49.1	74.0	-24.9	Peak	Vertical
	11633.5	33.1	12.4	45.5	74.0	-28.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT80 – Channel 138
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	35.1	12.5	47.6	68.2	-20.6	Peak	Horizontal
*	10494.5	33.9	13.4	47.3	68.2	-20.9	Peak	Horizontal
	11531.5	34.3	12.8	47.1	74.0	-26.9	Peak	Horizontal
	12169.0	34.0	12.2	46.2	74.0	-27.8	Peak	Horizontal
*	9942.0	33.5	12.5	46.0	68.2	-22.2	Peak	Vertical
*	10494.5	33.1	13.4	46.5	68.2	-21.7	Peak	Vertical
	11072.5	33.6	13.3	46.9	74.0	-27.1	Peak	Vertical
	11531.5	34.7	12.8	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	35.1	12.6	47.7	68.2	-20.5	Peak	Horizontal
*	10350.0	34.0	13.2	47.2	68.2	-21.0	Peak	Horizontal
	11548.5	35.7	13.0	48.7	74.0	-25.3	Peak	Horizontal
	12220.0	35.0	12.2	47.2	74.0	-26.8	Peak	Horizontal
*	9636.0	34.2	12.3	46.5	68.2	-21.7	Peak	Vertical
*	10443.5	34.2	13.3	47.5	68.2	-20.7	Peak	Vertical
	11378.5	34.7	12.8	47.5	74.0	-26.5	Peak	Vertical
	12007.5	34.5	12.3	46.8	74.0	-27.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	33.6	12.7	46.3	68.2	-21.9	Peak	Horizontal
*	10401.0	33.6	13.2	46.8	68.2	-21.4	Peak	Horizontal
	11140.5	40.3	12.9	53.2	74.0	-20.8	Peak	Horizontal
	11140.5	38.3	12.9	51.2	54.0	-2.8	Average	Horizontal
	11684.5	33.4	12.2	45.6	74.0	-28.4	Peak	Horizontal
*	9942.0	34.4	12.5	46.9	68.2	-21.3	Peak	Vertical
*	10494.5	33.9	13.4	47.3	68.2	-20.9	Peak	Vertical
	11140.5	37.4	12.9	50.3	74.0	-23.7	Peak	Vertical
	11531.5	34.9	12.8	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-01-19 ~ 01-31	Test Mode	802.11be-EHT240 – Channel 130
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	34.2	12.6	46.8	68.2	-21.4	Peak	Horizontal
*	9993.0	33.9	12.8	46.7	68.2	-21.5	Peak	Horizontal
	11217.0	40.7	12.5	53.2	74.0	-20.8	Peak	Horizontal
	11217.0	39.2	12.5	51.7	54.0	-2.3	Average	Horizontal
	11846.0	33.6	12.2	45.8	74.0	-28.2	Peak	Horizontal
*	9644.5	36.2	12.2	48.4	68.2	-19.8	Peak	Vertical
*	10137.5	35.0	13.0	48.0	68.2	-20.2	Peak	Vertical
	11217.0	38.2	12.5	50.7	74.0	-23.3	Peak	Vertical
	11217.0	37.0	12.5	49.5	54.0	-4.5	Average	Vertical
	12007.5	33.8	12.3	46.1	74.0	-27.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode – N_{ss} = 4

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8412.0	51.5	-5.9	45.6	74.0	-28.4	Peak	Horizontal
*	9644.5	52.6	-5.1	47.5	68.2	-20.7	Peak	Horizontal
*	10520.0	51.6	-4.5	47.1	68.2	-21.1	Peak	Horizontal
	12228.5	48.9	-3.3	45.6	74.0	-28.4	Peak	Horizontal
	8412.0	50.8	-5.9	44.9	74.0	-29.1	Peak	Vertical
*	10520.0	51.9	-4.5	47.4	68.2	-20.8	Peak	Vertical
	12228.5	47.5	-3.3	44.2	74.0	-29.8	Peak	Vertical
*	14396.0	46.0	0.4	46.4	68.2	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	51.9	-5.1	46.8	68.2	-21.4	Peak	Horizontal
*	10596.5	53.6	-4.4	49.2	68.2	-19.0	Peak	Horizontal
	11387.0	47.6	-4.3	43.3	74.0	-30.7	Peak	Horizontal
	12228.5	48.4	-3.3	45.1	74.0	-28.9	Peak	Horizontal
*	10596.5	50.0	-4.4	45.6	68.2	-22.6	Peak	Vertical
	12109.5	47.5	-3.4	44.1	74.0	-29.9	Peak	Vertical
*	13809.5	46.1	-1.0	45.1	68.2	-23.1	Peak	Vertical
	15824.0	45.1	2.6	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	52.1	-5.1	47.0	68.2	-21.2	Peak	Horizontal
	10639.0	54.0	-4.8	49.2	74.0	-24.8	Peak	Horizontal
	12228.5	49.5	-3.3	46.2	74.0	-27.8	Peak	Horizontal
*	13809.5	48.8	-1.0	47.8	68.2	-20.4	Peak	Horizontal
*	9644.5	52.1	-5.1	47.0	68.2	-21.2	Peak	Vertical
	10639.0	54.0	-4.8	49.2	74.0	-24.8	Peak	Vertical
	12228.5	49.5	-3.3	46.2	74.0	-27.8	Peak	Vertical
*	13809.5	48.8	-1.0	47.8	68.2	-20.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	52.4	-5.1	47.3	68.2	-20.9	Peak	Horizontal
	10996.0	56.8	-4.6	52.2	74.0	-21.8	Peak	Horizontal
	10996.0	56.5	-4.6	51.9	54.0	-2.1	Average	Horizontal
	12228.5	48.2	-3.3	44.9	74.0	-29.1	Peak	Horizontal
*	13809.5	49.0	-1.0	48.0	68.2	-20.2	Peak	Horizontal
*	9891.0	48.0	-4.6	43.4	68.2	-24.8	Peak	Vertical
	10996.0	55.3	-4.6	50.7	74.0	-23.3	Peak	Vertical
	12135.0	47.8	-3.6	44.2	74.0	-29.8	Peak	Vertical
*	14175.0	46.5	-1.1	45.4	68.2	-22.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	51.9	-5.1	46.8	68.2	-21.4	Peak	Horizontal
	11157.5	57.4	-4.4	53.0	74.0	-21.0	Peak	Horizontal
	11157.5	56.7	-4.4	52.3	54.0	-1.7	Average	Horizontal
	12228.5	48.5	-3.3	45.2	74.0	-28.8	Peak	Horizontal
*	13809.5	49.3	-1.0	48.3	68.2	-19.9	Peak	Horizontal
*	10214.0	47.3	-4.7	42.6	68.2	-25.6	Peak	Vertical
	11157.5	56.0	-4.4	51.6	74.0	-22.4	Peak	Vertical
	11157.5	55.7	-4.4	51.3	54.0	-2.7	Average	Vertical
	12135.0	46.6	-3.6	43.0	74.0	-31.0	Peak	Vertical
*	13809.5	46.1	-1.0	45.1	68.2	-23.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	51.9	-5.1	46.8	68.2	-21.4	Peak	Horizontal
	11404.0	54.6	-4.3	50.3	74.0	-23.7	Peak	Horizontal
	12228.5	49.0	-3.3	45.7	74.0	-28.3	Peak	Horizontal
*	13809.5	49.2	-1.0	48.2	68.2	-20.0	Peak	Horizontal
*	10120.5	46.8	-4.7	42.1	68.2	-26.1	Peak	Vertical
	11404.0	52.6	-4.3	48.3	74.0	-25.7	Peak	Vertical
	12220.0	47.4	-3.2	44.2	74.0	-29.8	Peak	Vertical
*	13809.5	45.8	-1.0	44.8	68.2	-23.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	52.0	-5.1	46.9	68.2	-21.3	Peak	Horizontal
	11438.0	54.2	-4.2	50.0	74.0	-24.0	Peak	Horizontal
	12228.5	48.3	-3.3	45.0	74.0	-29.0	Peak	Horizontal
*	13809.5	49.5	-1.0	48.5	68.2	-19.7	Peak	Horizontal
*	10443.5	48.3	-4.7	43.6	68.2	-24.6	Peak	Vertical
	11438.0	51.7	-4.2	47.5	74.0	-26.5	Peak	Vertical
	11905.5	48.5	-3.7	44.8	74.0	-29.2	Peak	Vertical
*	13733.0	46.0	-0.8	45.2	68.2	-23.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10520.0	51.4	-4.5	46.9	68.2	-21.3	Peak	Horizontal
	11353.0	47.3	-3.5	43.8	74.0	-30.2	Peak	Horizontal
	12228.5	49.1	-3.3	45.8	74.0	-28.2	Peak	Horizontal
*	13809.5	48.2	-1.0	47.2	68.2	-21.0	Peak	Horizontal
*	10520.0	51.9	-4.5	47.4	68.2	-20.8	Peak	Vertical
	11106.5	48.2	-4.4	43.8	74.0	-30.2	Peak	Vertical
	12058.5	47.2	-3.5	43.7	74.0	-30.3	Peak	Vertical
*	13741.5	46.1	-1.1	45.0	68.2	-23.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10596.5	52.4	-4.4	48.0	68.2	-20.2	Peak	Horizontal
	11667.5	47.1	-4.1	43.0	74.0	-31.0	Peak	Horizontal
	12228.5	48.6	-3.3	45.3	74.0	-28.7	Peak	Horizontal
*	13809.5	49.8	-1.0	48.8	68.2	-19.4	Peak	Horizontal
*	10596.5	51.2	-4.4	46.8	68.2	-21.4	Peak	Vertical
	11353.0	47.9	-3.5	44.4	74.0	-29.6	Peak	Vertical
	12228.5	48.1	-3.3	44.8	74.0	-29.2	Peak	Vertical
*	13716.0	47.2	-1.3	45.9	68.2	-22.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	51.9	-5.1	46.8	68.2	-21.4	Peak	Horizontal
	10639.0	54.0	-4.8	49.2	74.0	-24.8	Peak	Horizontal
	12228.5	48.2	-3.3	44.9	74.0	-29.1	Peak	Horizontal
*	13809.5	49.1	-1.0	48.1	68.2	-20.1	Peak	Horizontal
*	9899.5	46.4	-4.7	41.7	68.2	-26.5	Peak	Vertical
	10639.0	51.6	-4.8	46.8	74.0	-27.2	Peak	Vertical
	12050.0	47.4	-3.6	43.8	74.0	-30.2	Peak	Vertical
*	13614.0	45.4	-0.8	44.6	68.2	-23.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11be-EHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	52.1	-5.1	47.0	68.2	-21.2	Peak	Horizontal
	10996.0	56.3	-4.6	51.7	74.0	-22.3	Peak	Horizontal
	10996.0	56.7	-4.6	52.1	54.0	-1.9	Average	Horizontal
	12228.5	48.2	-3.3	44.9	74.0	-29.1	Peak	Horizontal
*	13809.5	49.0	-1.0	48.0	68.2	-20.2	Peak	Horizontal
*	9899.5	46.6	-4.7	41.9	68.2	-26.3	Peak	Vertical
	10996.0	55.5	-4.6	50.9	74.0	-23.1	Peak	Vertical
	13282.5	46.1	-2.2	43.9	74.0	-30.1	Peak	Vertical
*	16631.5	43.7	4.4	48.1	68.2	-20.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11be-EHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	52.9	-5.1	47.8	68.2	-20.4	Peak	Horizontal
	11157.5	56.8	-4.4	52.4	74.0	-21.6	Peak	Horizontal
	11157.5	56.3	-4.4	51.9	54.0	-2.1	Average	Horizontal
	12228.5	48.8	-3.3	45.5	74.0	-28.5	Peak	Horizontal
*	13809.5	50.4	-1.0	49.4	68.2	-18.8	Peak	Horizontal
*	10001.5	48.6	-4.8	43.8	68.2	-24.4	Peak	Vertical
	11157.5	53.2	-4.4	48.8	74.0	-25.2	Peak	Vertical
	12228.5	48.8	-3.3	45.5	74.0	-28.5	Peak	Vertical
*	13707.5	46.9	-1.2	45.7	68.2	-22.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11be-EHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	52.4	-5.1	47.3	68.2	-20.9	Peak	Horizontal
	11404.0	54.1	-4.3	49.8	74.0	-24.2	Peak	Horizontal
	12228.5	48.2	-3.3	44.9	74.0	-29.1	Peak	Horizontal
*	13809.5	48.7	-1.0	47.7	68.2	-20.5	Peak	Horizontal
*	10180.0	48.5	-4.7	43.8	68.2	-24.4	Peak	Vertical
	11404.0	52.9	-4.3	48.6	74.0	-25.4	Peak	Vertical
	12441.0	46.9	-3.0	43.9	74.0	-30.1	Peak	Vertical
*	13605.5	45.7	-1.1	44.6	68.2	-23.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Wayne Wang
Test Date	2023-02-13	Test Mode	802.11be-EHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	52.6	-5.1	47.5	68.2	-20.7	Peak	Horizontal
	11438.0	54.6	-4.2	50.4	74.0	-23.6	Peak	Horizontal
	12228.5	48.2	-3.3	44.9	74.0	-29.1	Peak	Horizontal
*	13809.5	48.7	-1.0	47.7	68.2	-20.5	Peak	Horizontal
*	10171.5	48.5	-4.8	43.7	68.2	-24.5	Peak	Vertical
	11438.0	52.0	-4.2	47.8	74.0	-26.2	Peak	Vertical
	12296.5	48.1	-3.4	44.7	74.0	-29.3	Peak	Vertical
*	13809.5	46.6	-1.0	45.6	68.2	-22.6	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worse Case of Radiated Emission below 1GHz:

Site: WZ-AC1	Test Date: 2023-02-02
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

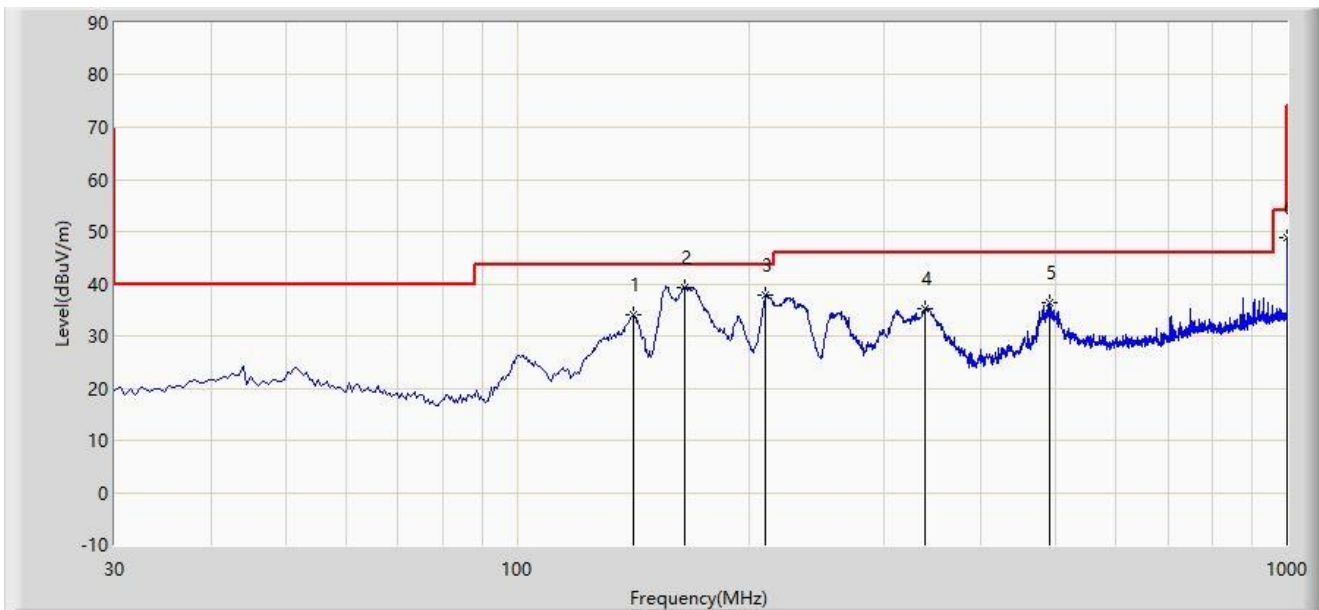

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		141.550	34.168	16.563	-9.332	43.500	17.605	PK
2	*	165.315	39.268	21.221	-4.232	43.500	18.047	PK
3		210.420	37.730	23.082	-5.770	43.500	14.648	PK
4		338.460	35.206	15.697	-10.794	46.000	19.509	PK
5		492.205	36.240	13.214	-9.760	46.000	23.026	PK
6		1000.000	48.891	18.552	-5.109	54.000	30.339	QP

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2023-02-02
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: WZ-AC1_VULB9162	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

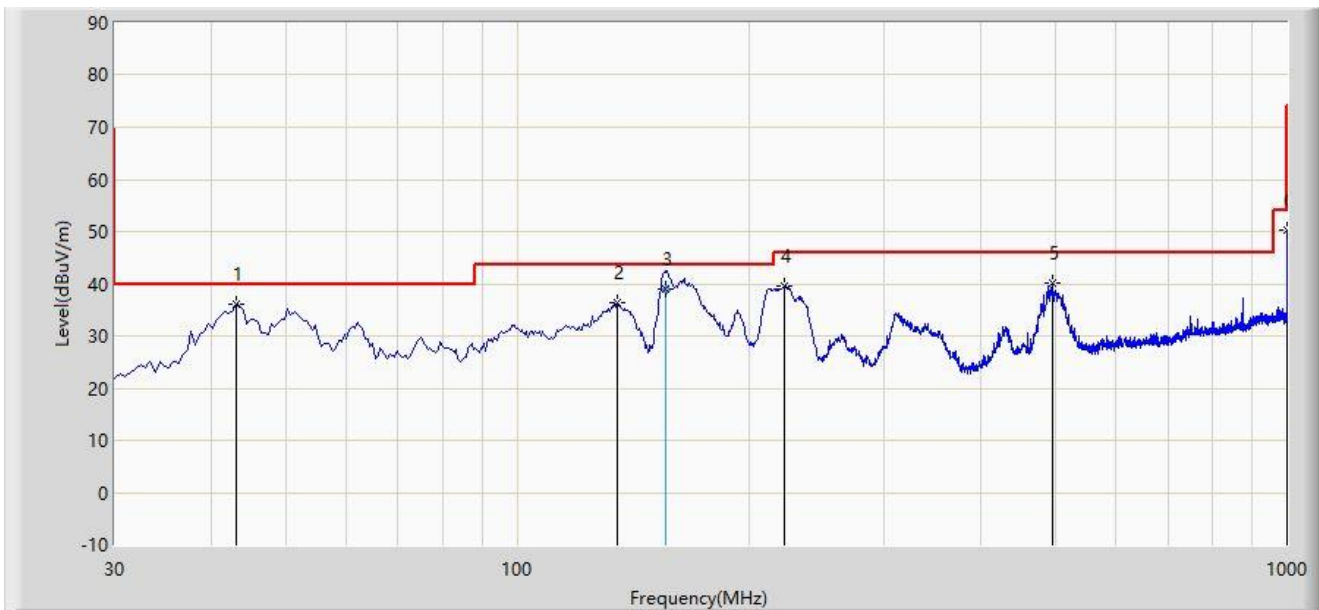

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		43.095	35.964	17.603	-4.036	40.000	18.361	PK
2		134.760	36.486	19.398	-7.014	43.500	17.088	PK
3		156.200	39.088	20.940	-4.412	43.500	18.148	QP
4		222.545	39.637	24.999	-6.363	46.000	14.638	PK
5		496.085	40.171	17.127	-5.829	46.000	23.044	PK
6	*	1000.000	50.277	19.938	-3.723	54.000	30.339	PK

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.


Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.6 Radiated Restricted Band Edge Test Result

Test mode – N_{ss} = 1

Site: WZ-AC1	Time: 2023/01/12 - 00:24
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

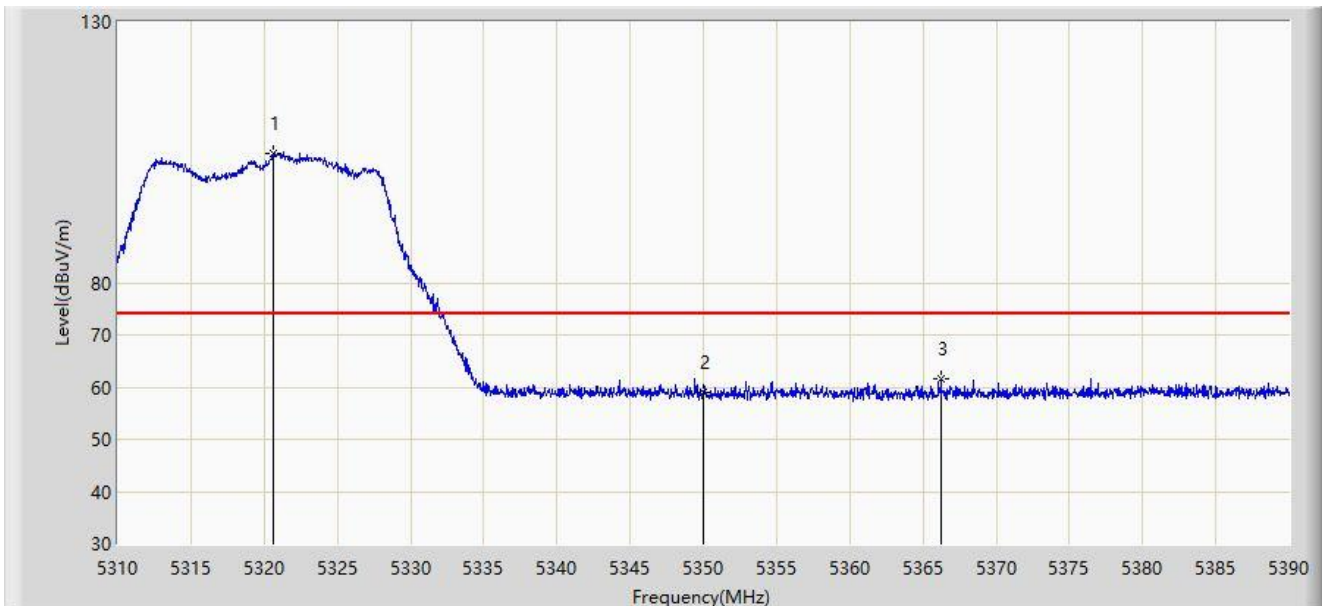


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.600	104.740	101.338	N/A	N/A	3.402	PK
2		5350.000	59.125	55.780	-14.875	74.000	3.344	PK
3	*	5366.240	61.734	58.465	-12.266	74.000	3.269	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:27
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

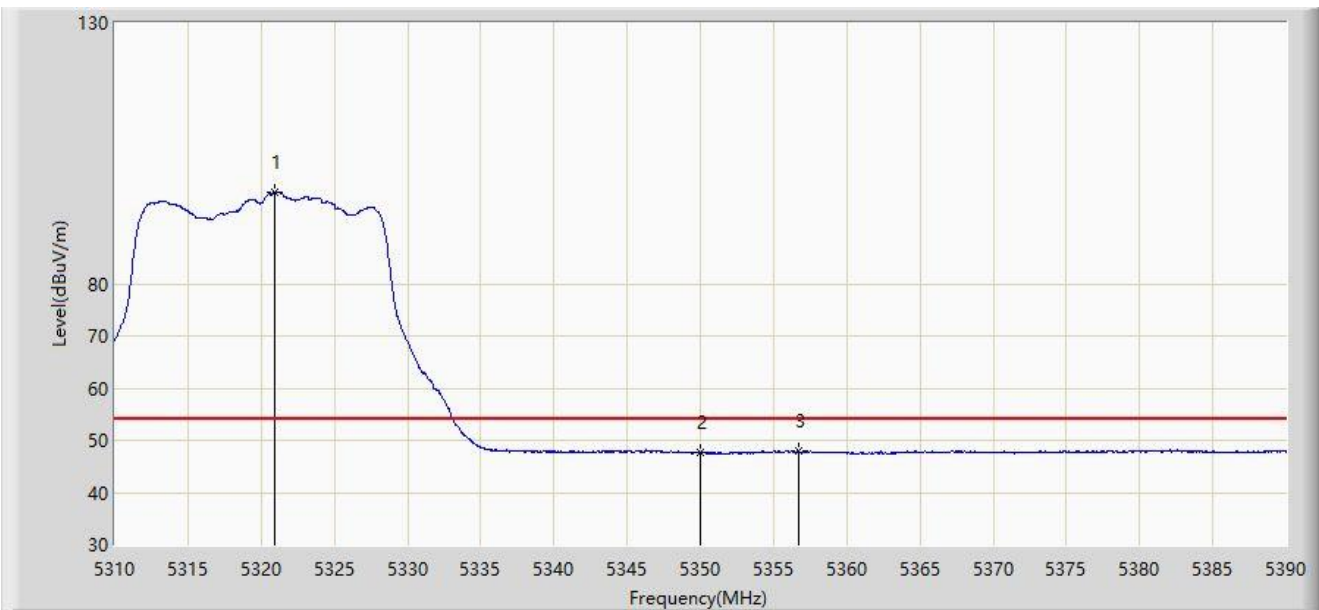


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.960	97.551	94.148	N/A	N/A	3.403	AV
2		5350.000	47.707	44.362	-6.293	54.000	3.344	AV
3	*	5356.720	48.096	44.799	-5.904	54.000	3.297	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:28
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

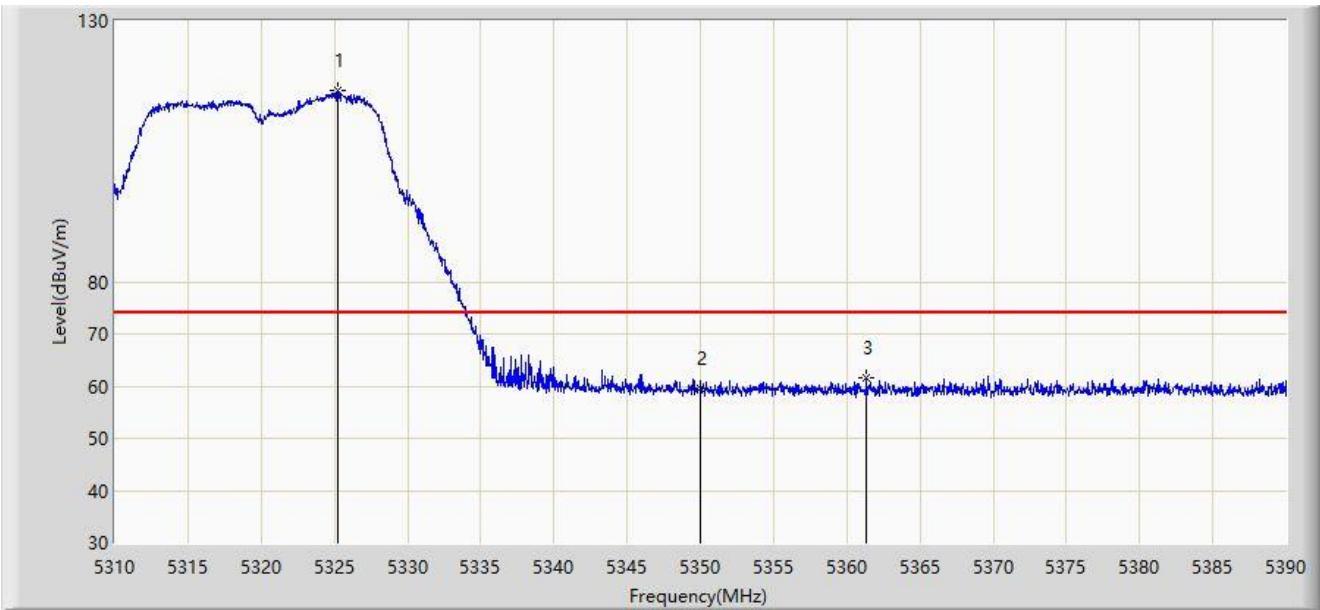


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.280	116.522	113.114	N/A	N/A	3.408	PK
2		5350.000	59.600	56.255	-14.400	74.000	3.344	PK
3	*	5361.360	61.463	58.179	-12.537	74.000	3.283	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:30
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

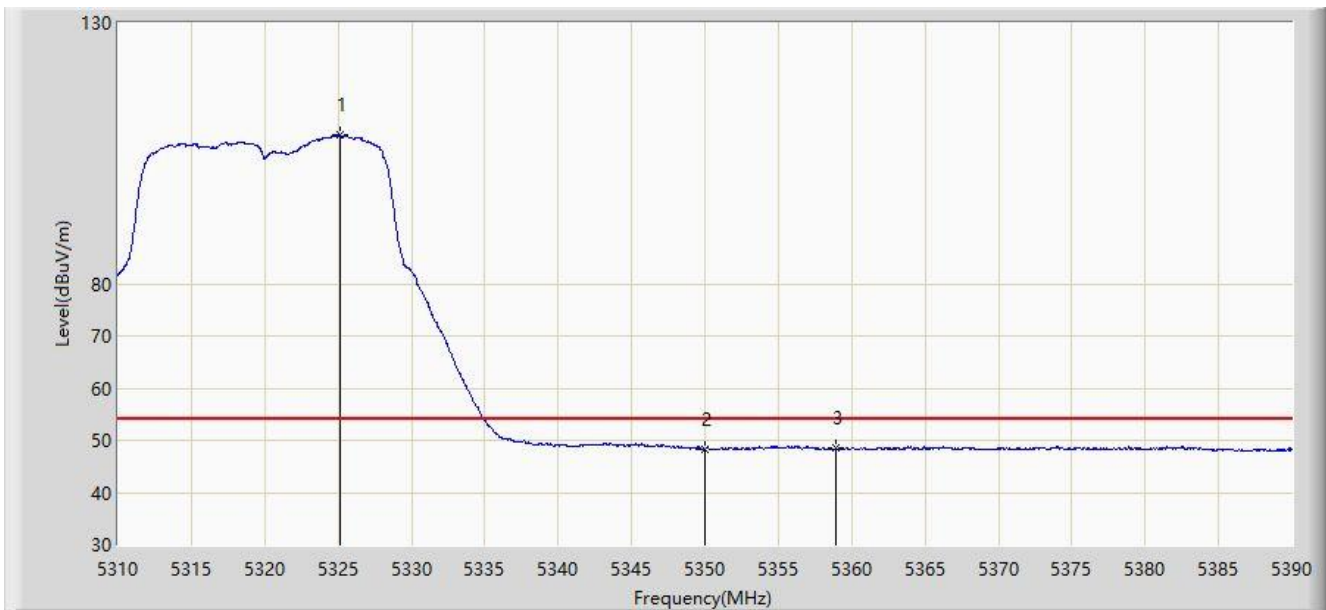


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5325.120	108.419	105.012	N/A	N/A	3.408	AV
2		5350.000	48.322	44.977	-5.678	54.000	3.344	AV
3	*	5358.880	48.595	45.304	-5.405	54.000	3.291	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:32
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

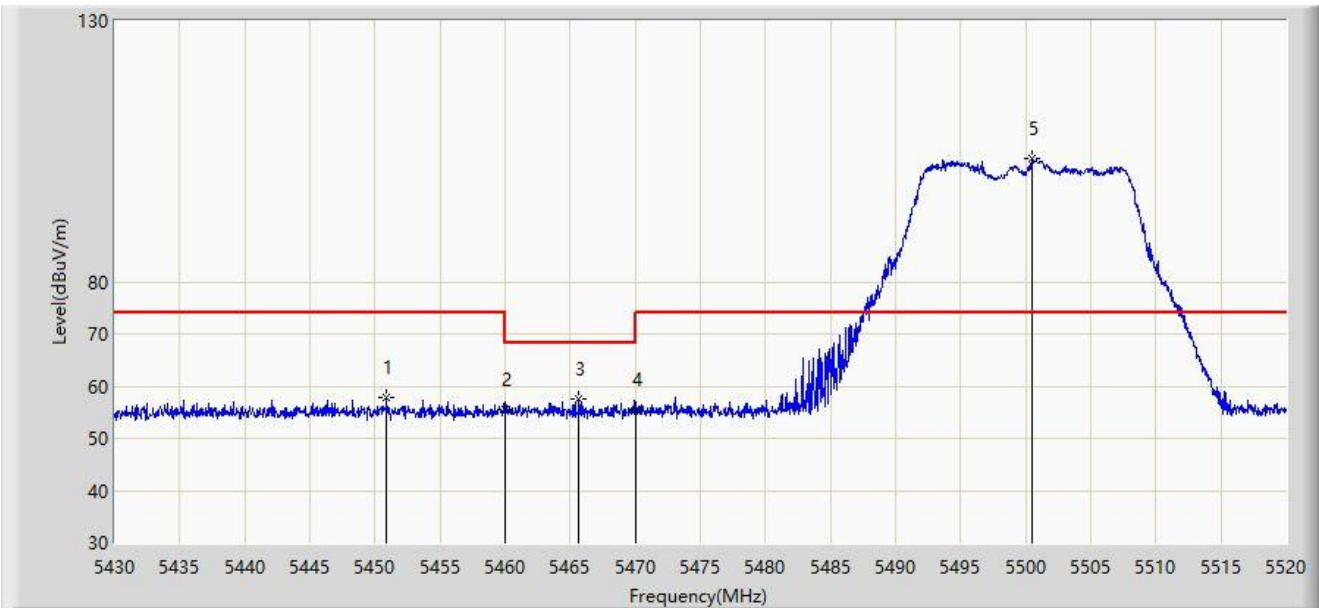


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5450.880	57.744	54.190	-16.256	74.000	3.554	PK
2		5460.000	55.625	51.995	-18.375	74.000	3.630	PK
3	*	5465.685	57.681	54.016	-10.519	68.200	3.665	PK
4		5470.000	55.392	51.701	-12.808	68.200	3.691	PK
5		5500.470	103.609	99.727	N/A	N/A	3.881	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:38
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

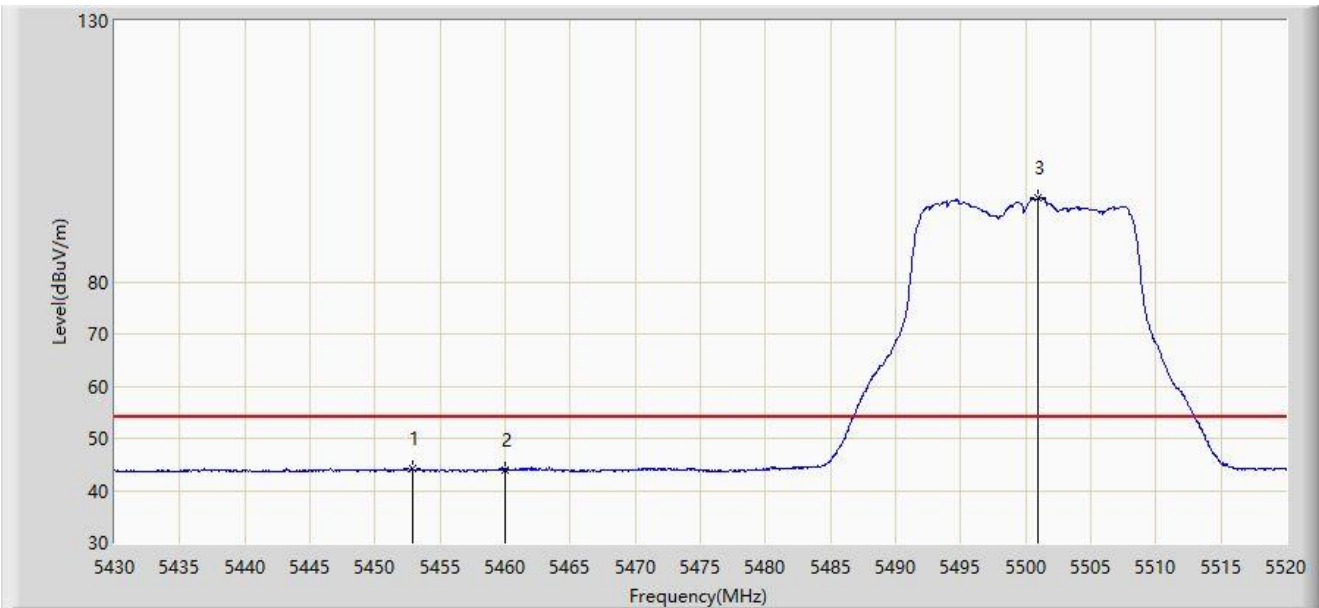


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5452.860	44.207	40.650	-9.793	54.000	3.557	AV
2		5460.000	44.052	40.422	-9.948	54.000	3.630	AV
3		5500.920	96.016	92.138	N/A	N/A	3.878	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:39
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

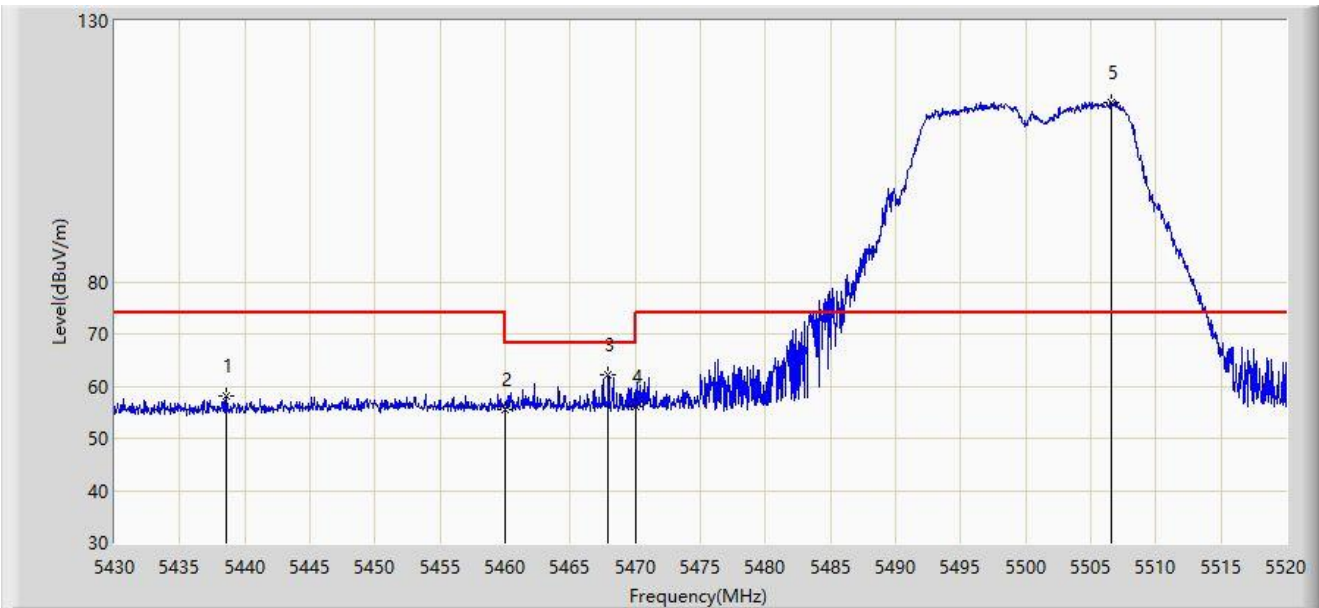


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5438.595	58.260	54.720	-15.740	74.000	3.540	PK
2		5460.000	55.590	51.960	-18.410	74.000	3.630	PK
3	*	5467.890	62.254	58.576	-5.946	68.200	3.679	PK
4		5470.000	56.223	52.532	-11.977	68.200	3.691	PK
5		5506.590	114.438	110.614	N/A	N/A	3.824	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:40
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

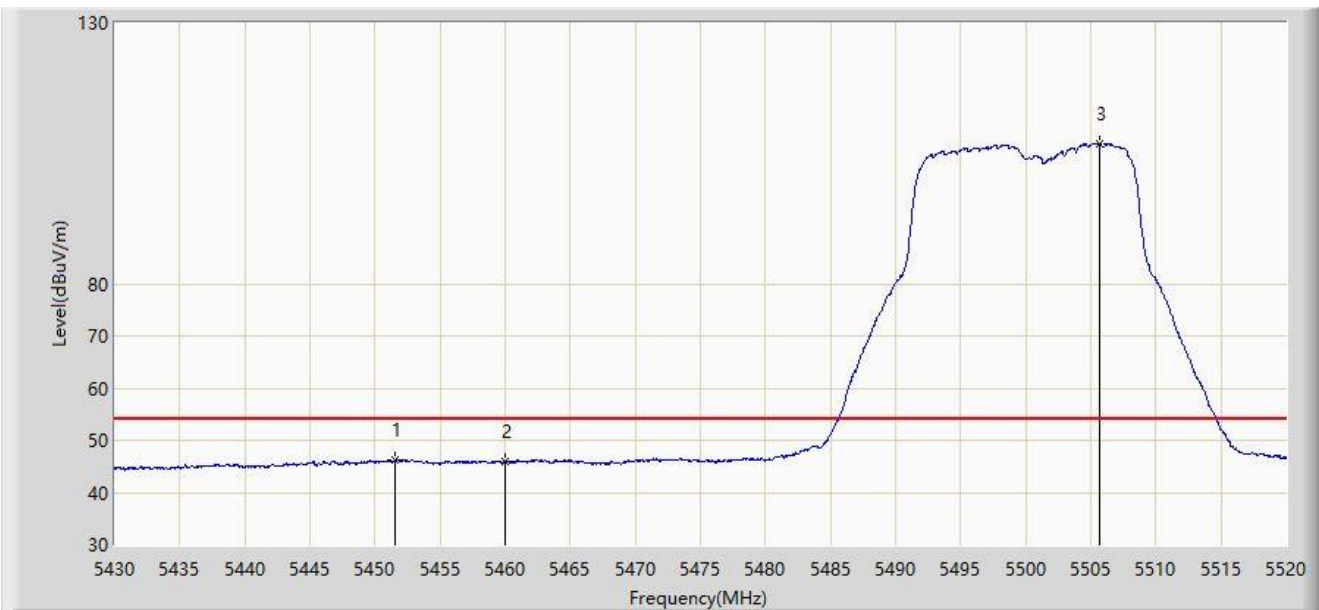


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5451.555	46.125	42.570	-7.875	54.000	3.556	AV
2		5460.000	45.976	42.346	-8.024	54.000	3.630	AV
3		5505.690	106.873	103.040	N/A	N/A	3.833	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:44
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

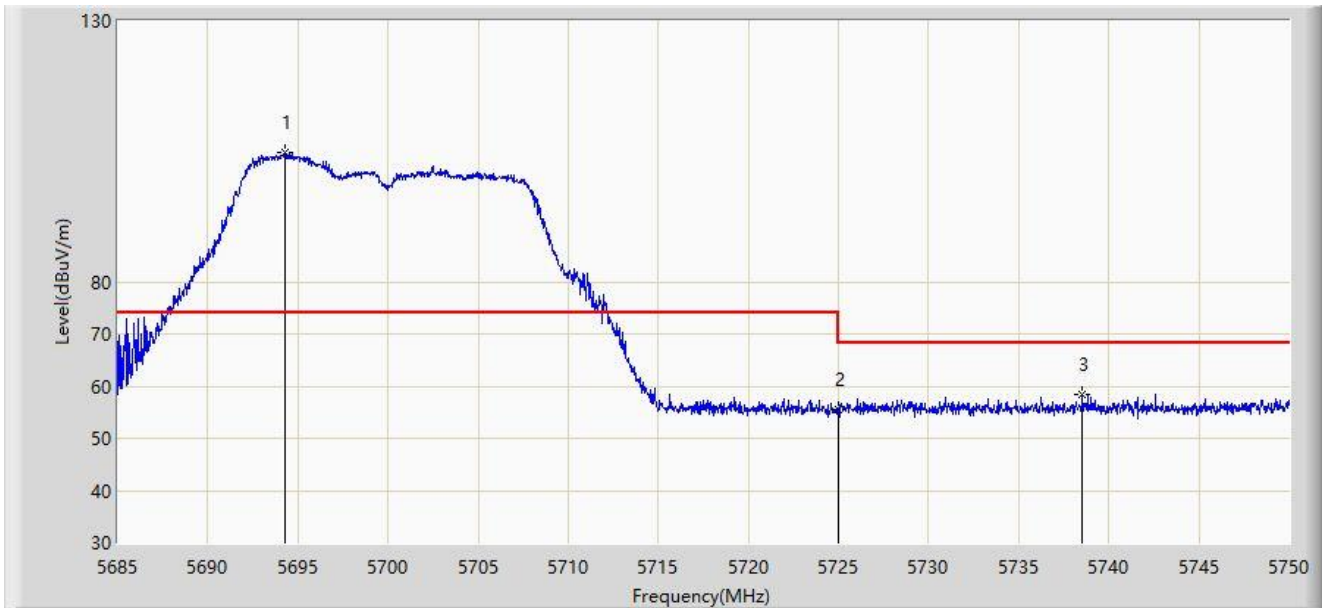


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5694.263	104.831	100.905	N/A	N/A	3.926	PK
2		5725.000	55.460	51.517	-12.740	68.200	3.943	PK
3	*	5738.527	58.282	54.178	-9.918	68.200	4.103	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 00:47
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

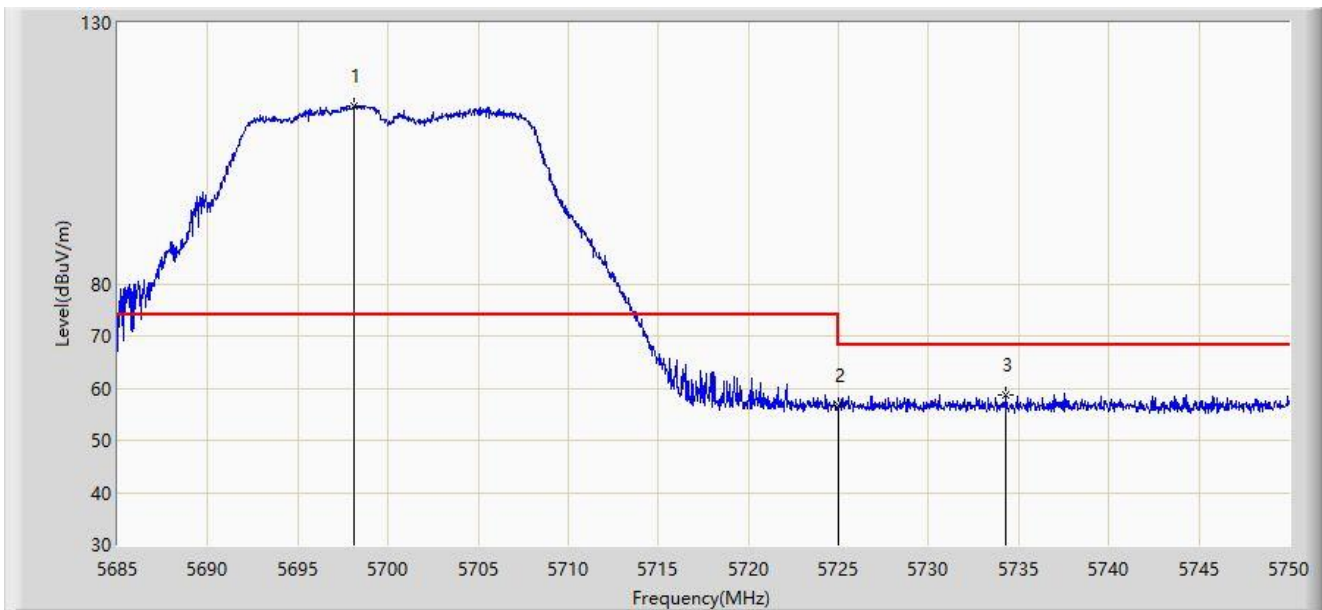


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5698.098	114.137	110.218	N/A	N/A	3.918	PK
2		5725.000	56.652	52.709	-11.548	68.200	3.943	PK
3	*	5734.303	58.639	54.589	-9.561	68.200	4.050	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 16:35
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

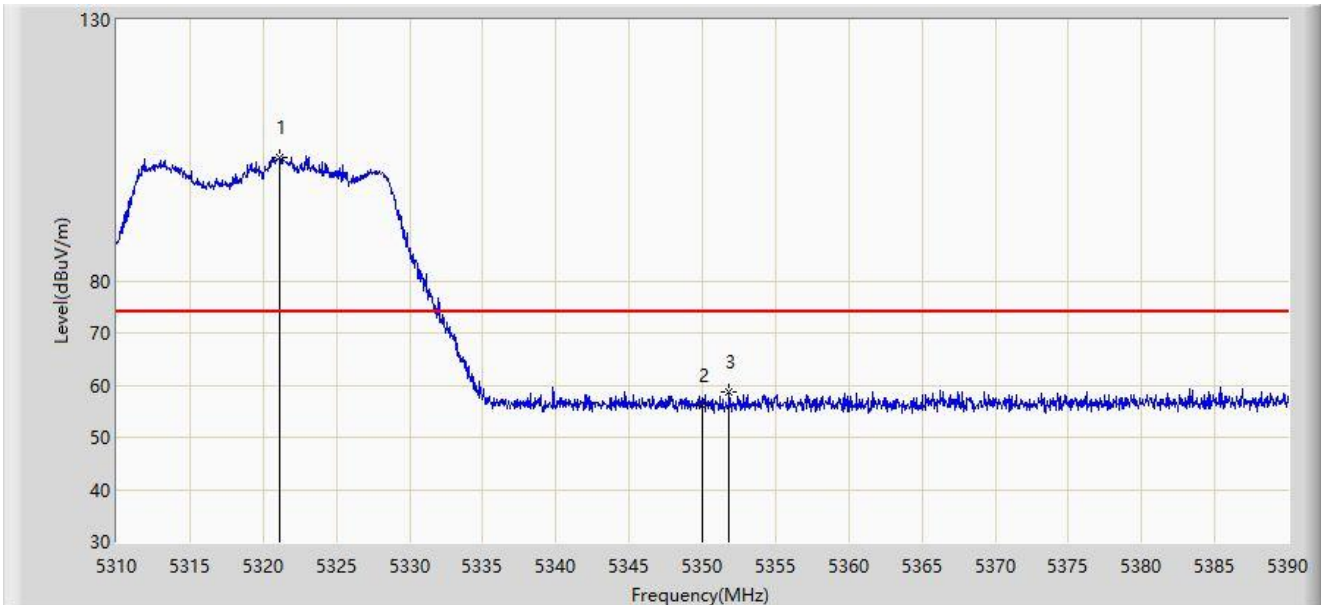


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5321.080	103.630	100.227	N/A	N/A	3.402	PK
2		5350.000	56.205	52.860	-17.795	74.000	3.344	PK
3	*	5351.840	58.749	55.435	-15.251	74.000	3.314	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 16:40
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

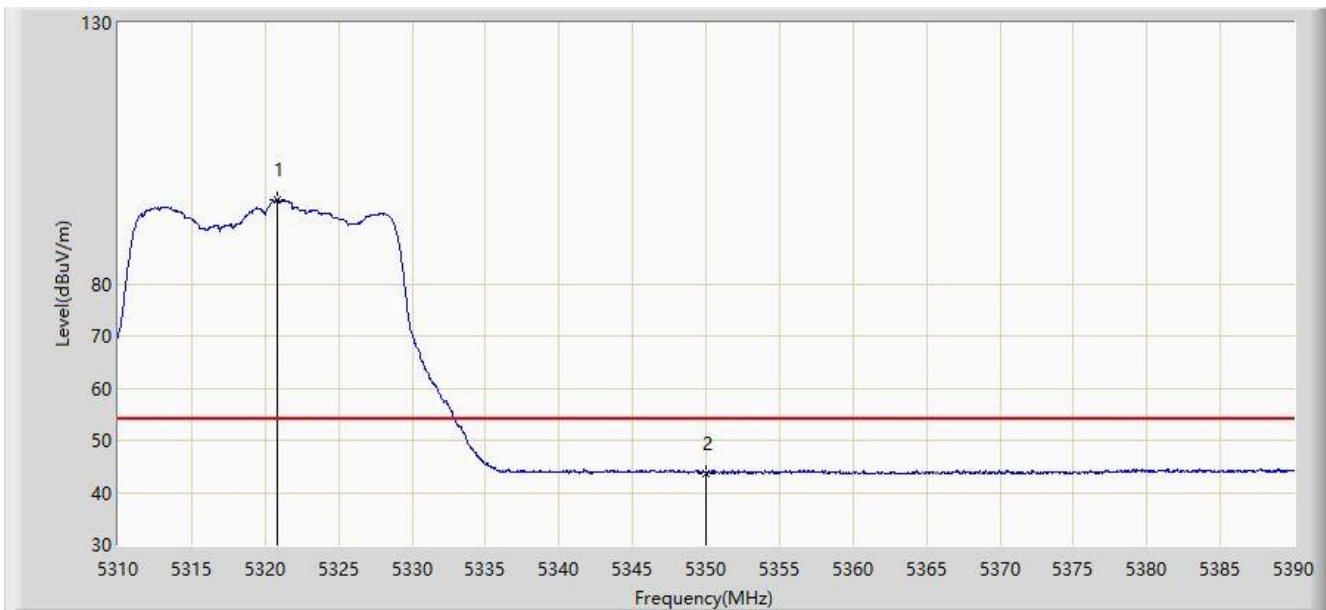


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.800	96.132	92.729	N/A	N/A	3.403	AV
2	*	5350.000	43.730	40.385	-10.270	54.000	3.344	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 16:43
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

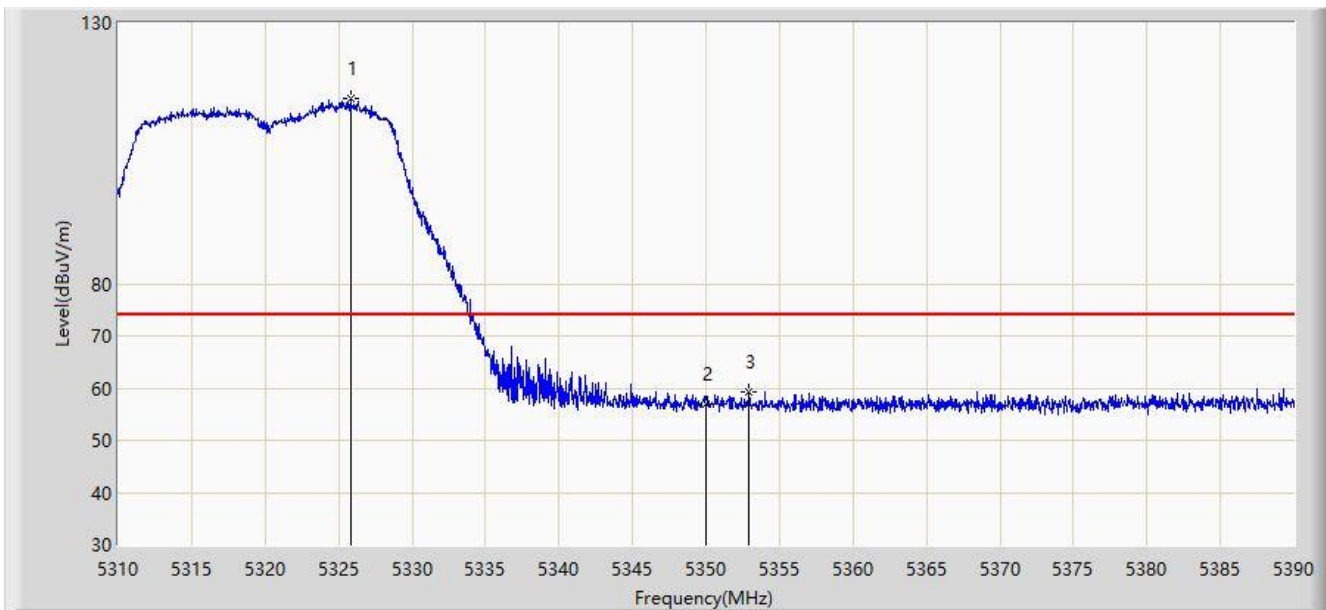


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5325.800	115.540	112.132	N/A	N/A	3.408	PK
2		5350.000	57.056	53.711	-16.944	74.000	3.344	PK
3	*	5352.920	59.358	56.050	-14.642	74.000	3.309	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 16:46
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

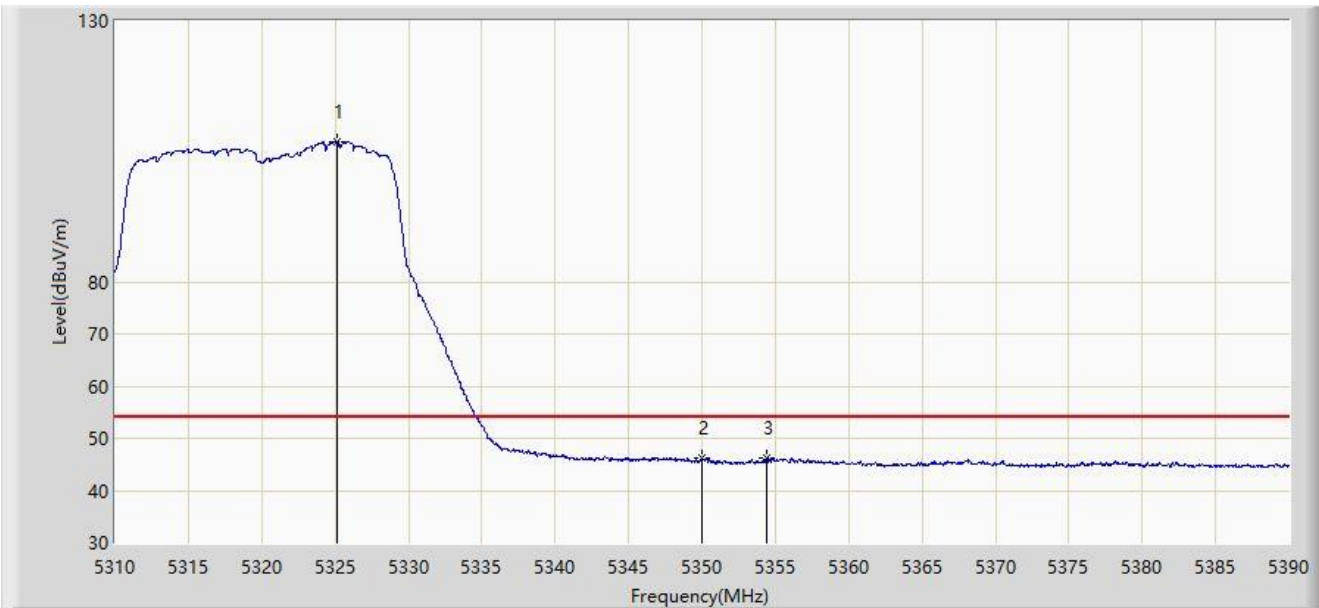


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.120	106.807	103.400	N/A	N/A	3.408	AV
2		5350.000	46.133	42.788	-7.867	54.000	3.344	AV
3	*	5354.440	46.306	43.002	-7.694	54.000	3.304	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 16:53
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

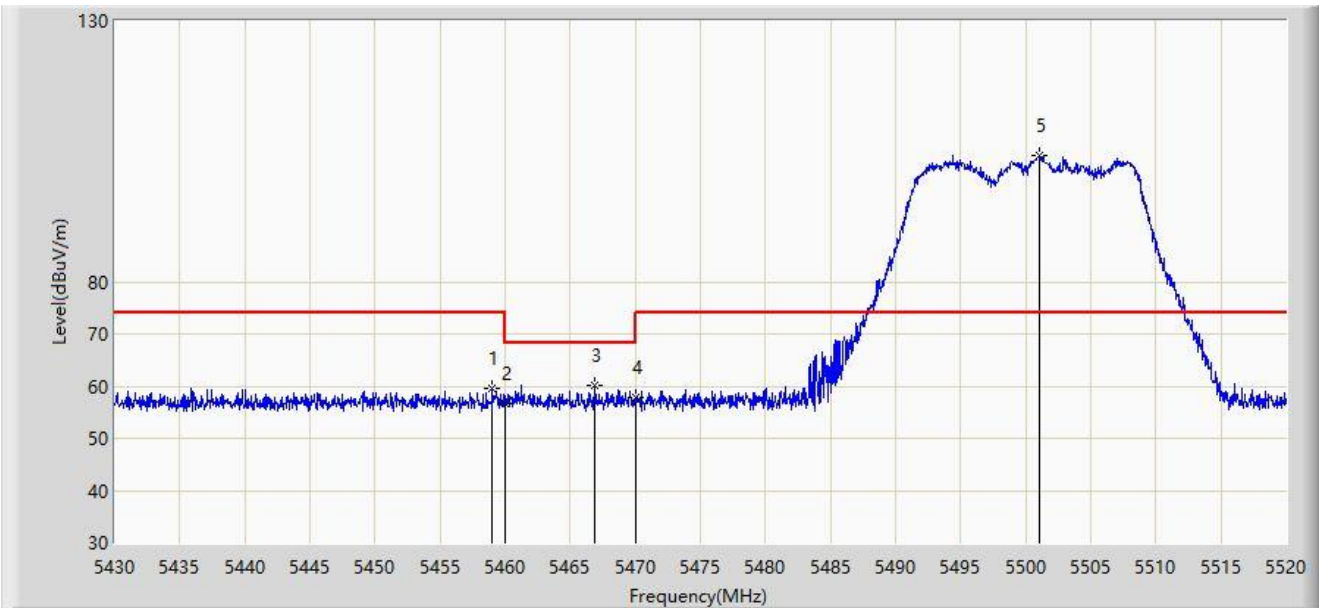


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5458.980	59.521	55.897	-14.479	74.000	3.623	PK
2		5460.000	56.553	52.923	-17.447	74.000	3.630	PK
3	*	5466.855	60.061	56.389	-8.139	68.200	3.672	PK
4		5470.000	57.893	54.202	-10.307	68.200	3.691	PK
5		5501.010	104.286	100.409	N/A	N/A	3.876	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 16:56
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

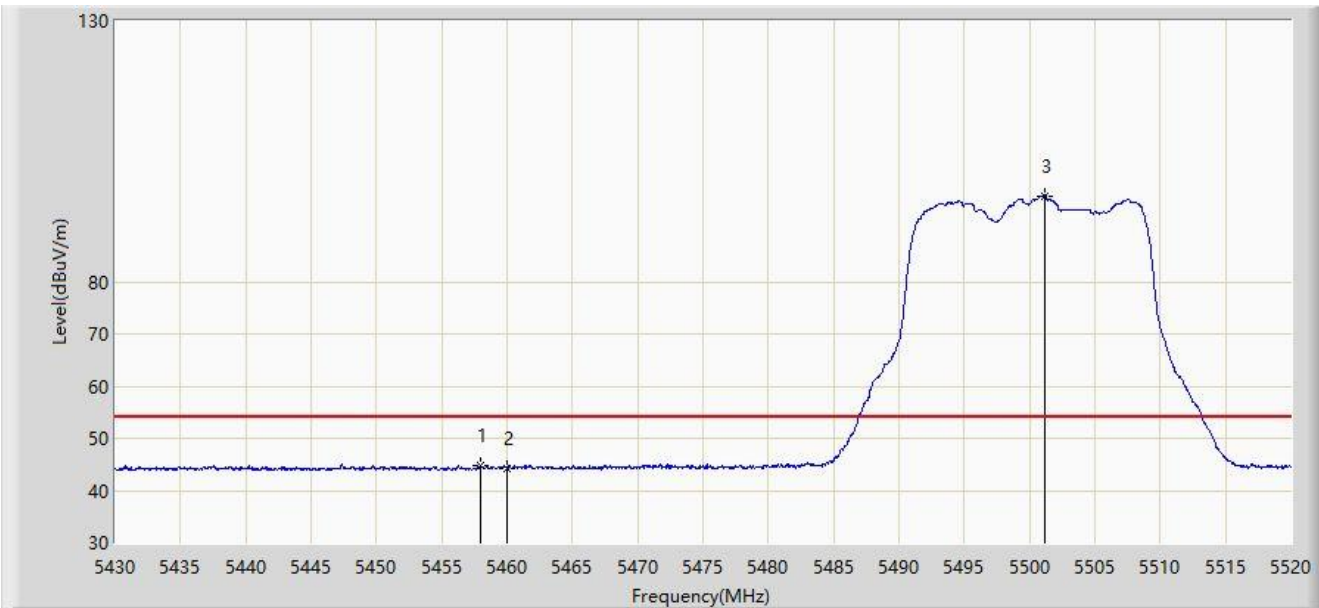


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5457.945	44.810	41.192	-9.190	54.000	3.618	AV
2		5460.000	44.295	40.665	-9.705	54.000	3.630	AV
3		5501.190	96.465	92.590	N/A	N/A	3.875	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 16:57
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

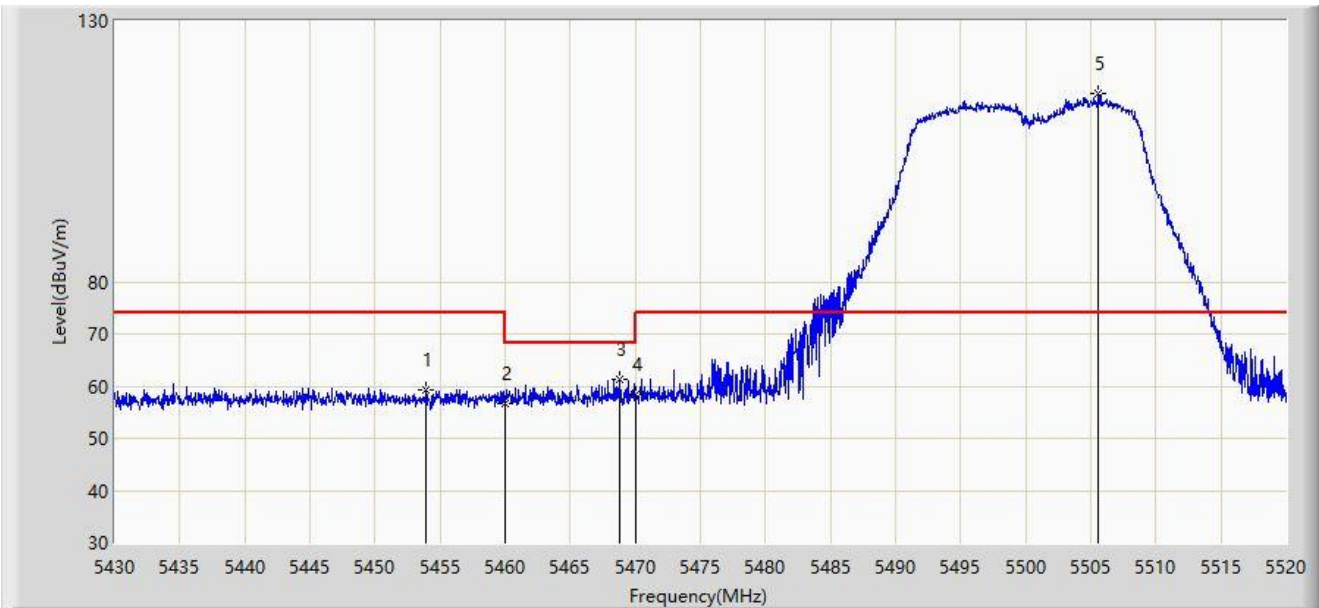


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.940	59.409	55.851	-14.591	74.000	3.558	PK
2		5460.000	56.746	53.116	-17.254	74.000	3.630	PK
3	*	5468.835	61.371	57.687	-6.829	68.200	3.684	PK
4		5470.000	58.364	54.673	-9.836	68.200	3.691	PK
5		5505.555	116.140	112.306	N/A	N/A	3.833	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 17:00
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

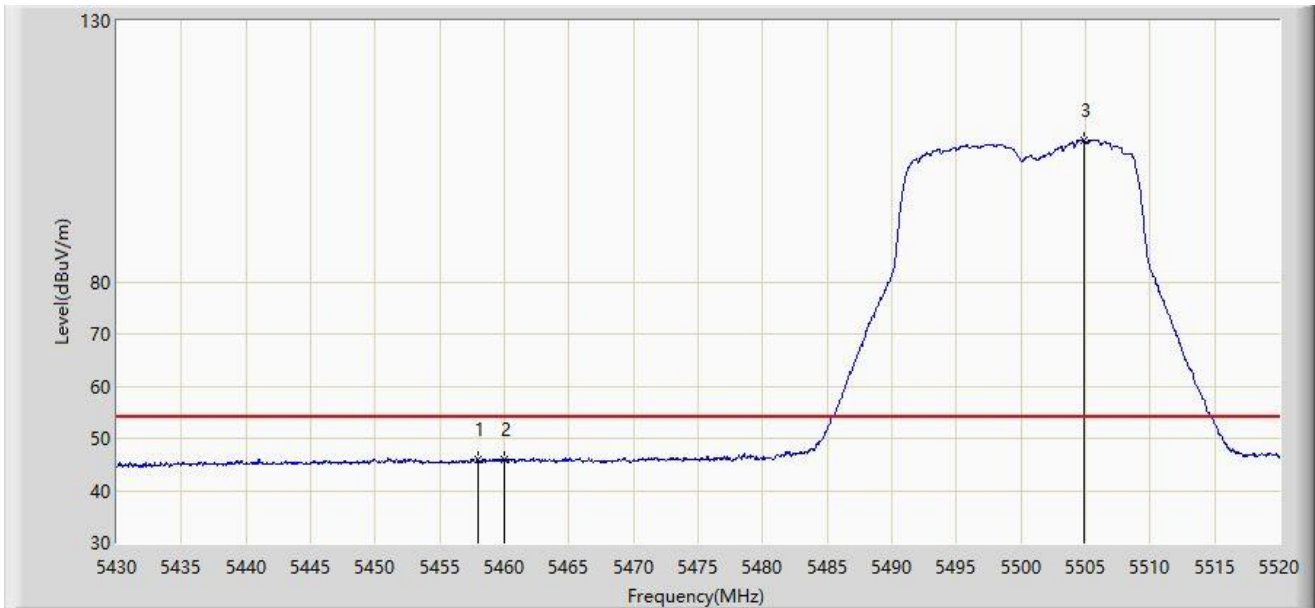


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5457.990	46.035	42.417	-7.965	54.000	3.619	AV
2		5460.000	45.973	42.343	-8.027	54.000	3.630	AV
3		5504.835	107.185	103.344	N/A	N/A	3.841	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 01:13
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

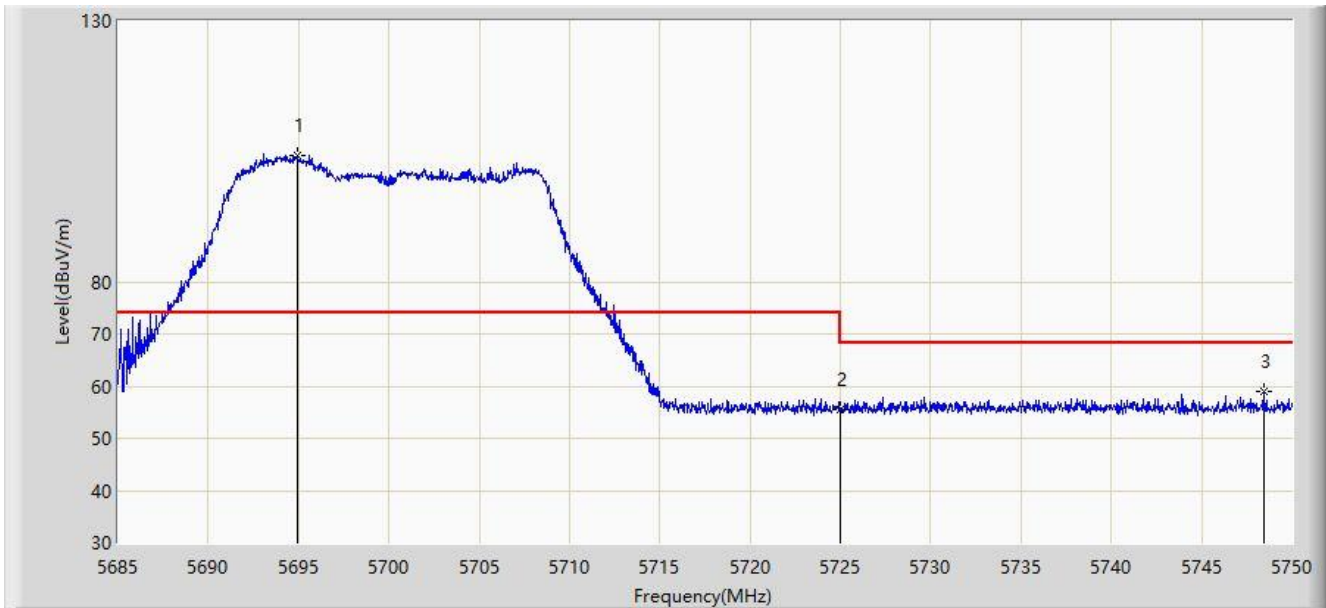


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5694.978	104.213	100.289	N/A	N/A	3.924	PK
2		5725.000	55.395	51.452	-12.805	68.200	3.943	PK
3	*	5748.440	58.849	54.667	-9.351	68.200	4.181	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/12 - 01:16
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

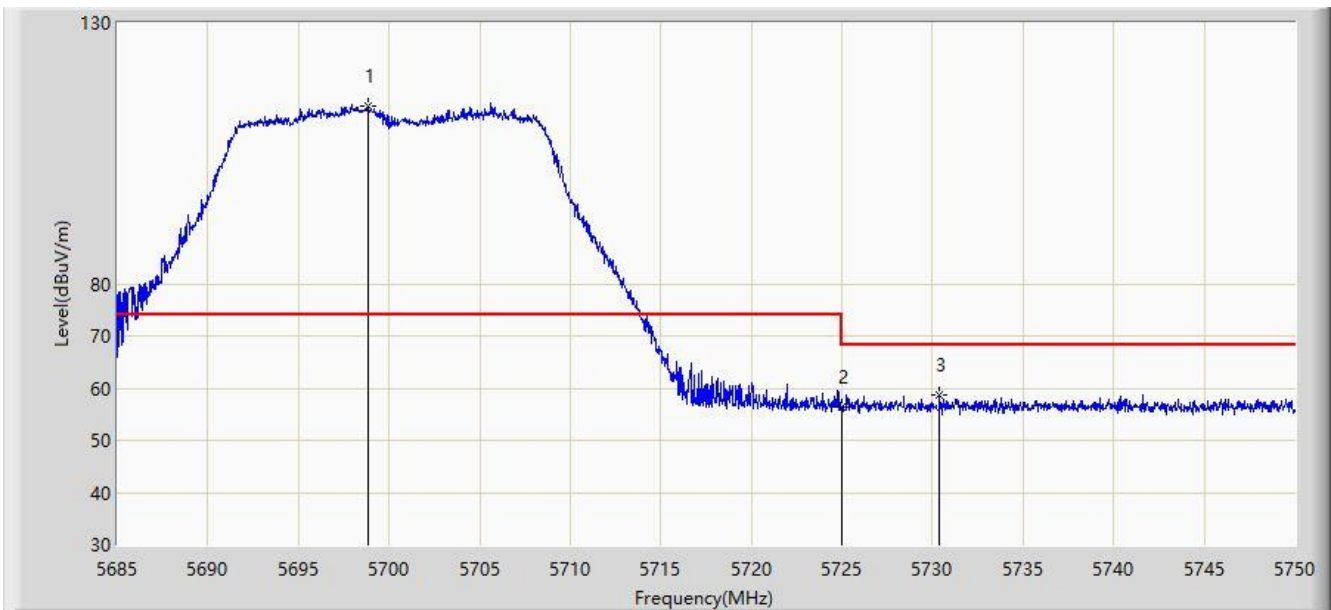


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5698.845	114.178	110.261	N/A	N/A	3.917	PK
2		5725.000	56.420	52.477	-11.780	68.200	3.943	PK
3	*	5730.402	58.826	54.826	-9.374	68.200	4.000	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 17:37
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

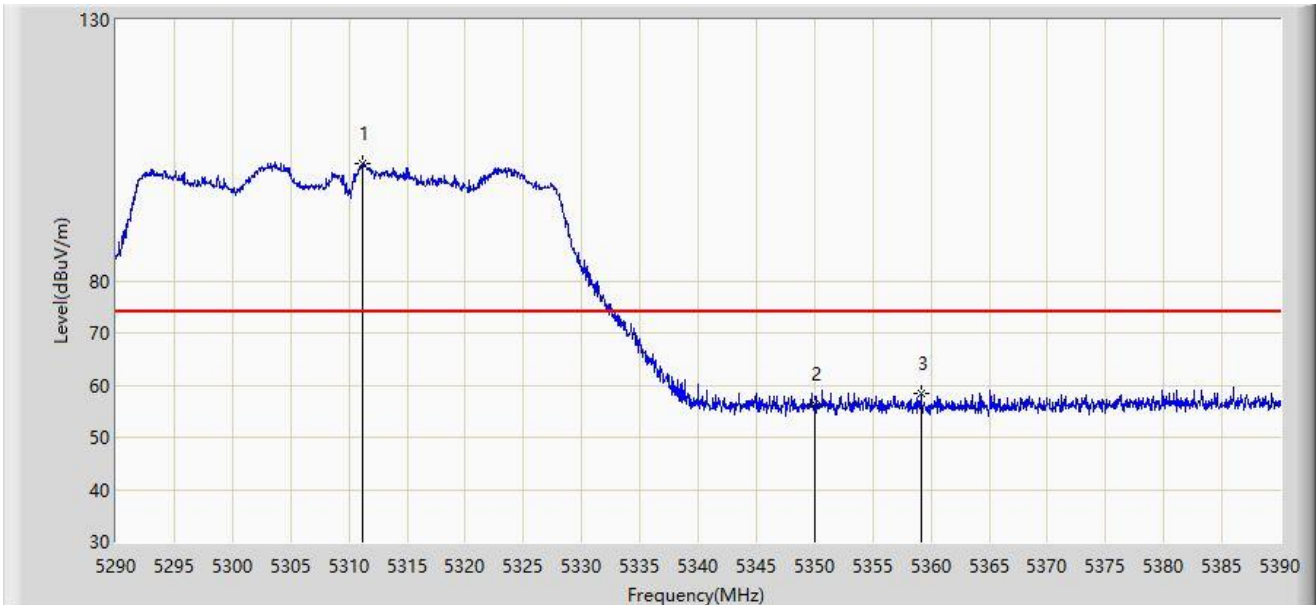


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.200	102.583	99.252	N/A	N/A	3.331	PK
2		5350.000	56.461	53.116	-17.539	74.000	3.344	PK
3	*	5359.150	58.469	55.179	-15.531	74.000	3.290	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 17:40
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

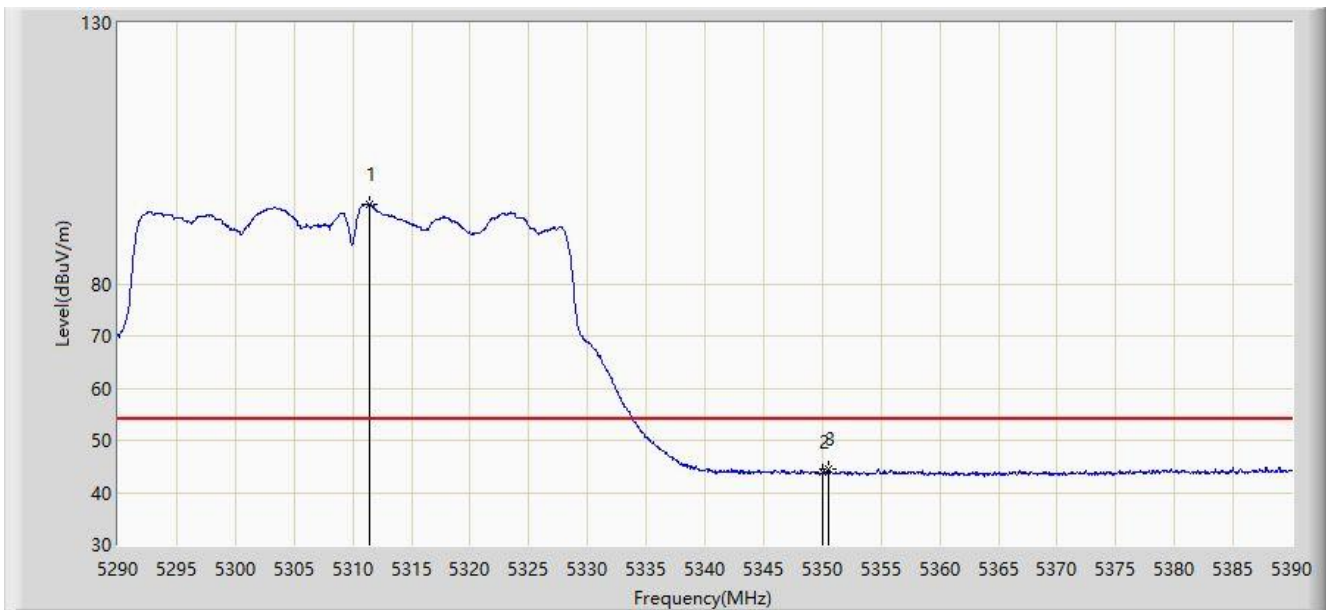


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.450	95.309	91.977	N/A	N/A	3.333	AV
2		5350.000	43.952	40.607	-10.048	54.000	3.344	AV
3	*	5350.550	44.395	41.059	-9.605	54.000	3.335	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 17:43
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

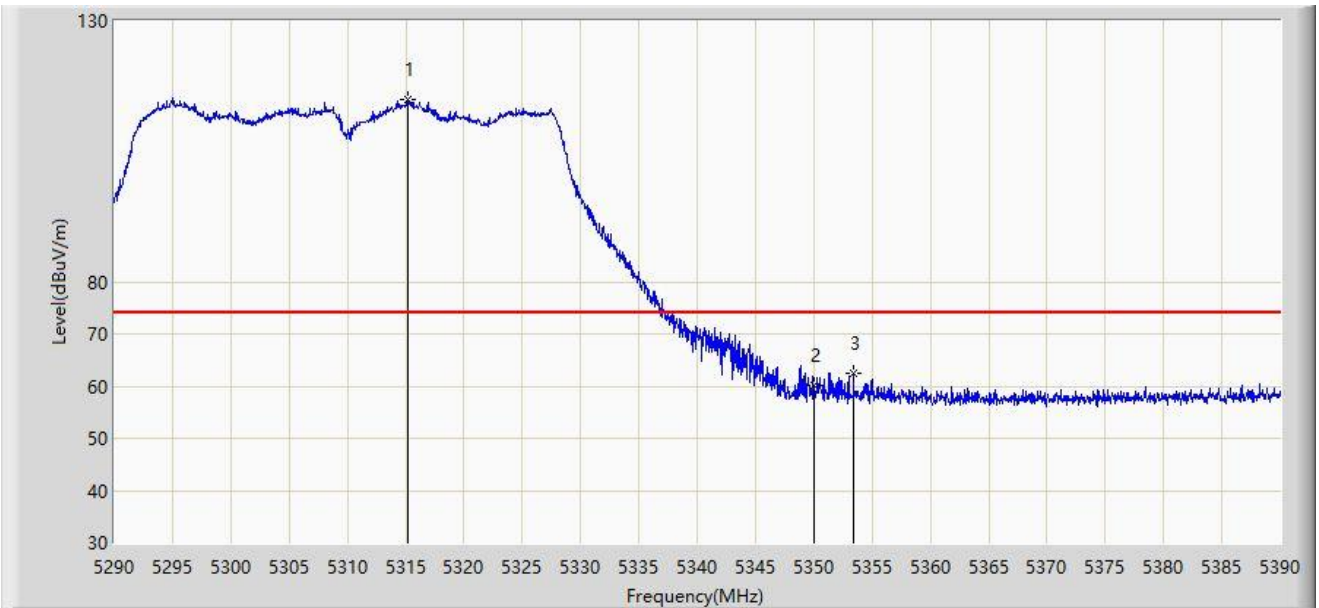


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5315.250	114.799	111.434	N/A	N/A	3.365	PK
2		5350.000	60.106	56.761	-13.894	74.000	3.344	PK
3	*	5353.400	62.539	59.232	-11.461	74.000	3.306	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/14 - 17:46
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

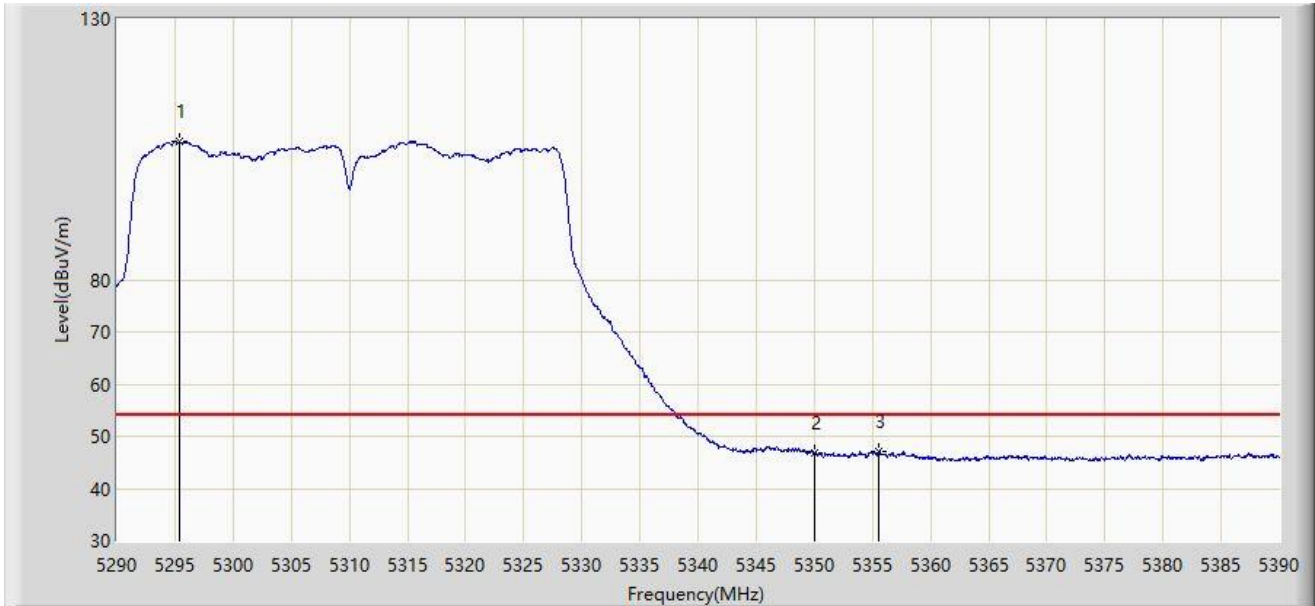


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5295.400	106.497	103.205	N/A	N/A	3.292	AV
2		5350.000	46.947	43.602	-7.053	54.000	3.344	AV
3	*	5355.600	47.074	43.773	-6.926	54.000	3.301	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:03
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

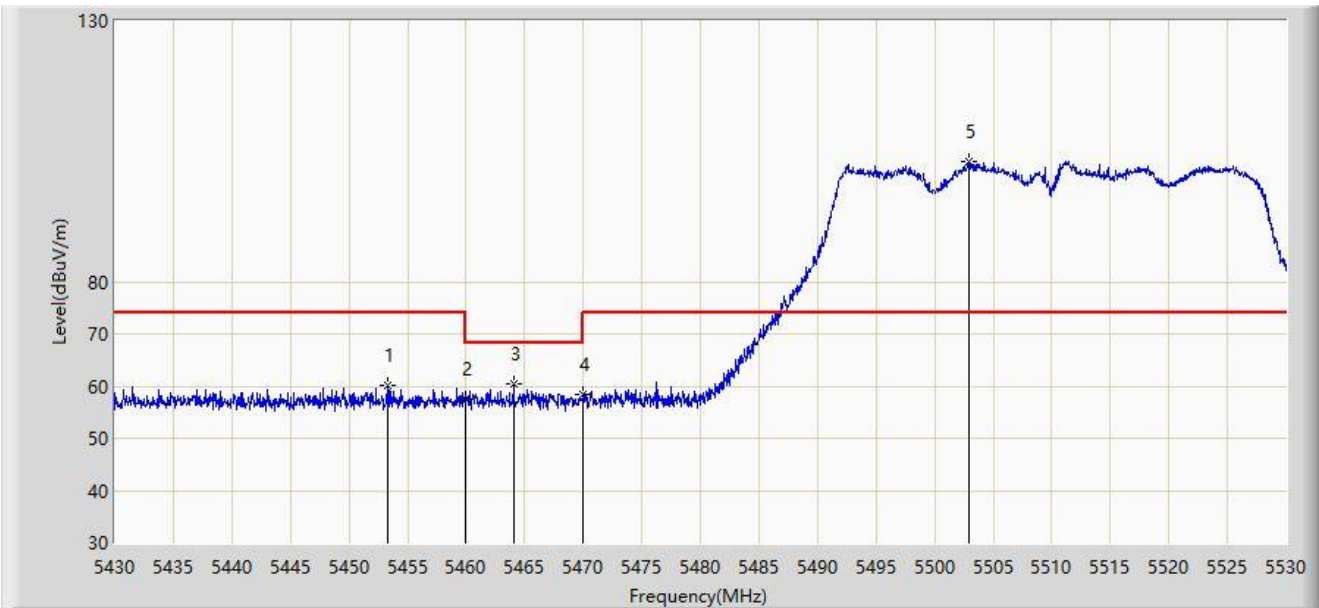


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.250	60.273	56.716	-13.727	74.000	3.557	PK
2		5460.000	57.465	53.835	-16.535	74.000	3.630	PK
3	*	5464.050	60.394	56.739	-7.806	68.200	3.654	PK
4		5470.000	58.475	54.784	-9.725	68.200	3.691	PK
5		5502.900	103.050	99.191	N/A	N/A	3.859	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:05
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

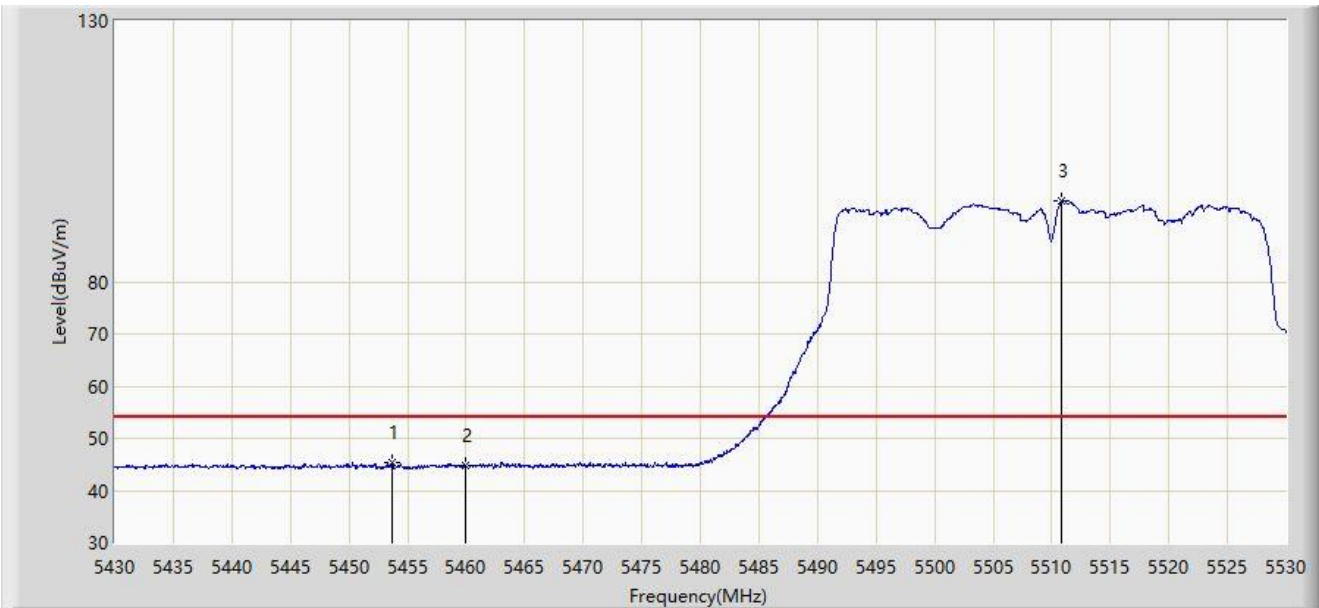


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5453.650	45.218	41.660	-8.782	54.000	3.557	AV
2		5460.000	44.739	41.109	-9.261	54.000	3.630	AV
3		5510.850	95.392	91.608	N/A	N/A	3.783	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:02
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

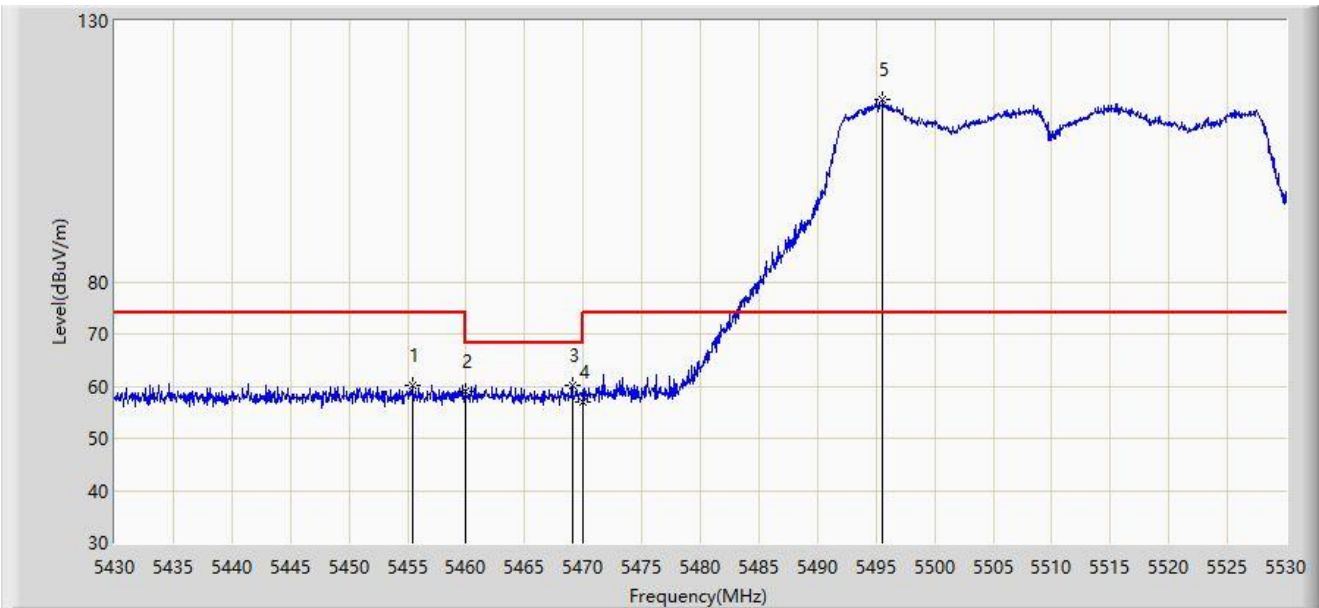


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5455.400	60.252	56.668	-13.748	74.000	3.584	PK
2		5460.000	59.100	55.470	-14.900	74.000	3.630	PK
3	*	5469.100	60.211	56.525	-7.989	68.200	3.686	PK
4		5470.000	57.030	53.339	-11.170	68.200	3.691	PK
5		5495.600	114.888	110.960	N/A	N/A	3.928	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 12:59
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

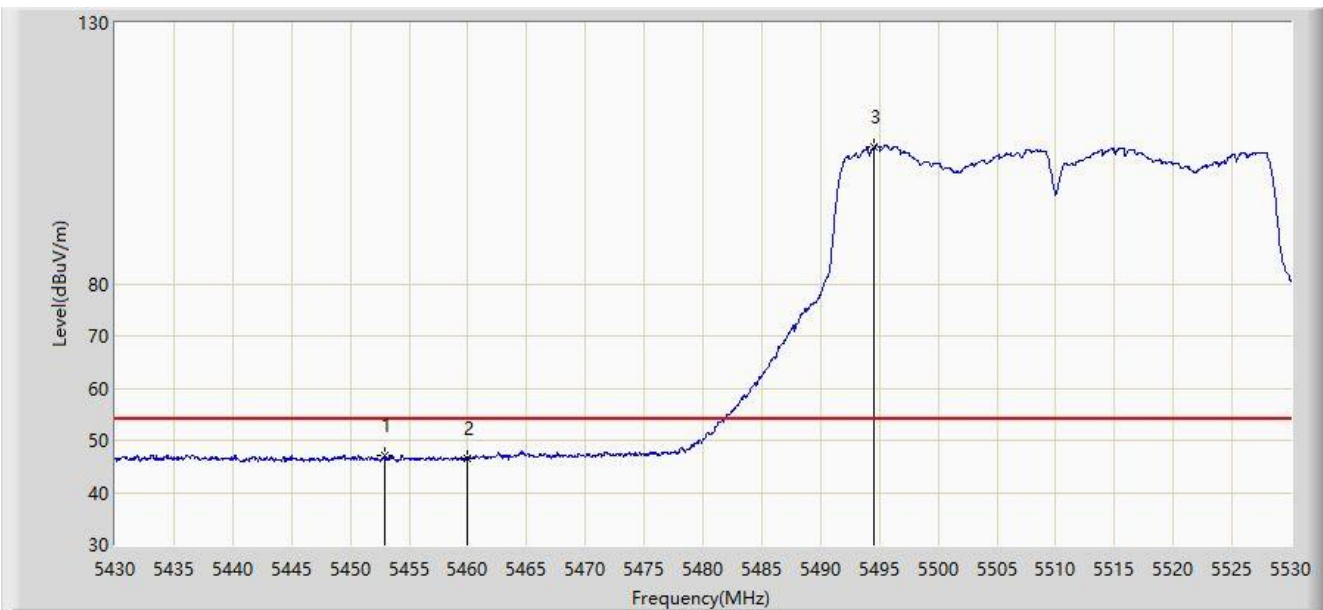


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5452.900	47.008	43.451	-6.992	54.000	3.556	AV
2		5460.000	46.570	42.940	-7.430	54.000	3.630	AV
3		5494.550	106.303	102.366	N/A	N/A	3.937	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 10:46
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

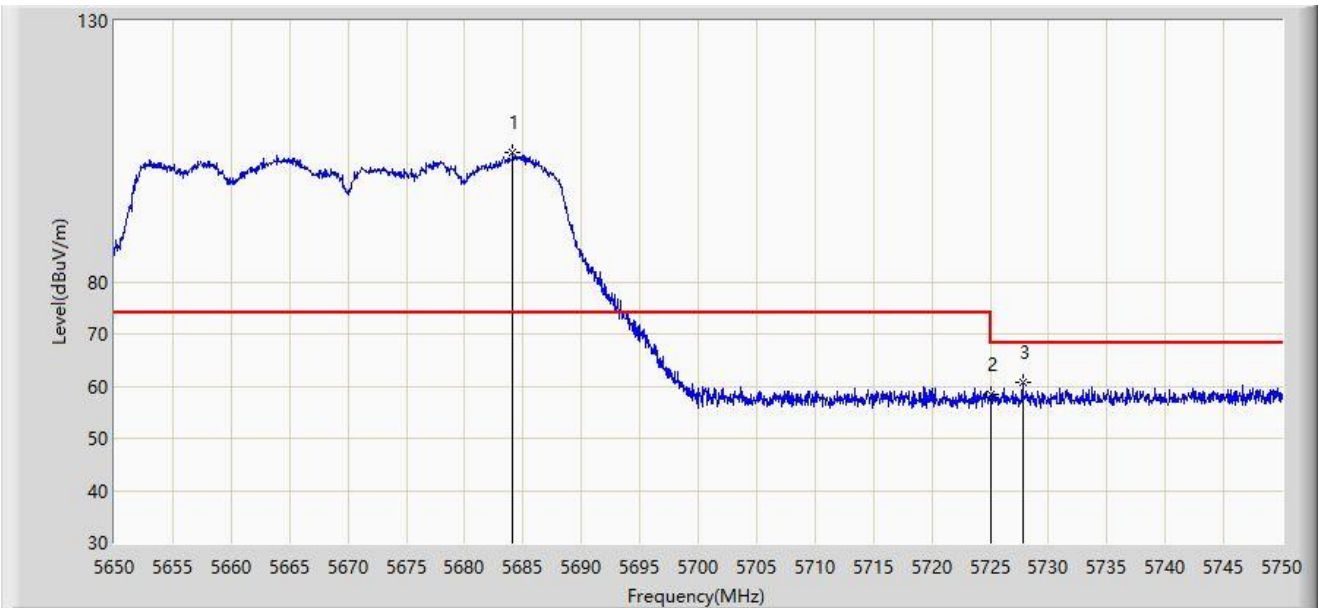


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5684.100	104.719	100.774	N/A	N/A	3.946	PK
2		5725.000	58.271	54.328	-9.929	68.200	3.943	PK
3	*	5727.800	60.680	56.713	-7.520	68.200	3.968	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 10:49
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

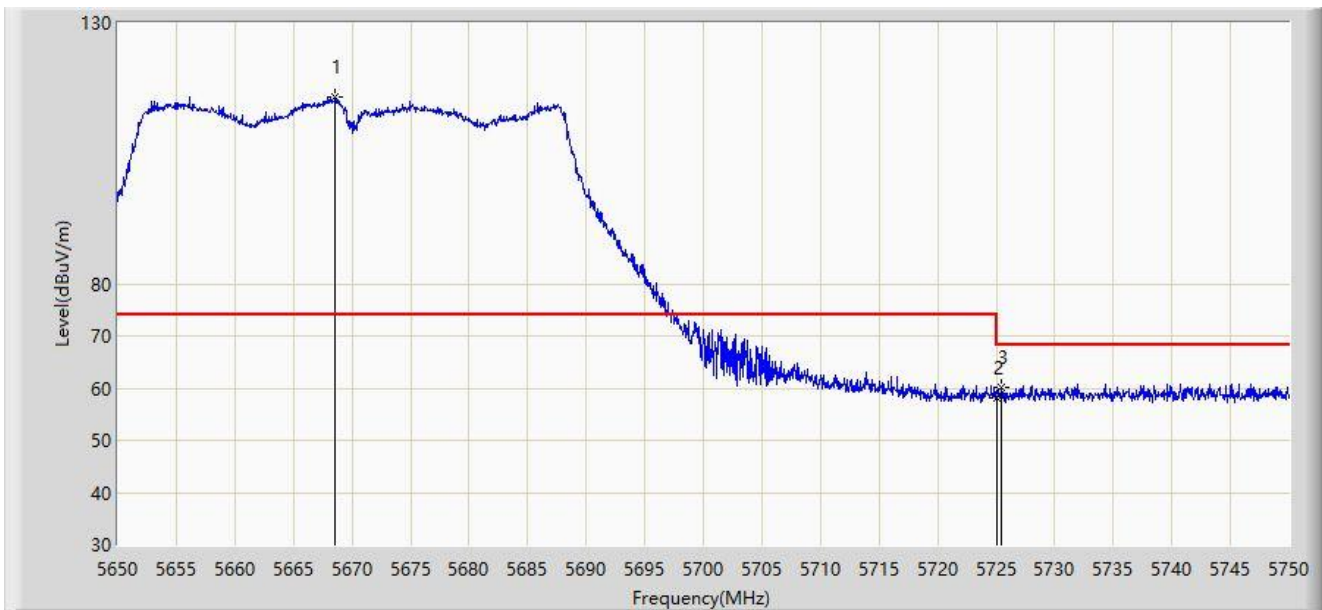


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.550	115.940	111.977	N/A	N/A	3.963	PK
2		5725.000	58.064	54.121	-10.136	68.200	3.943	PK
3	*	5725.450	60.105	56.161	-8.095	68.200	3.944	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 11:55
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

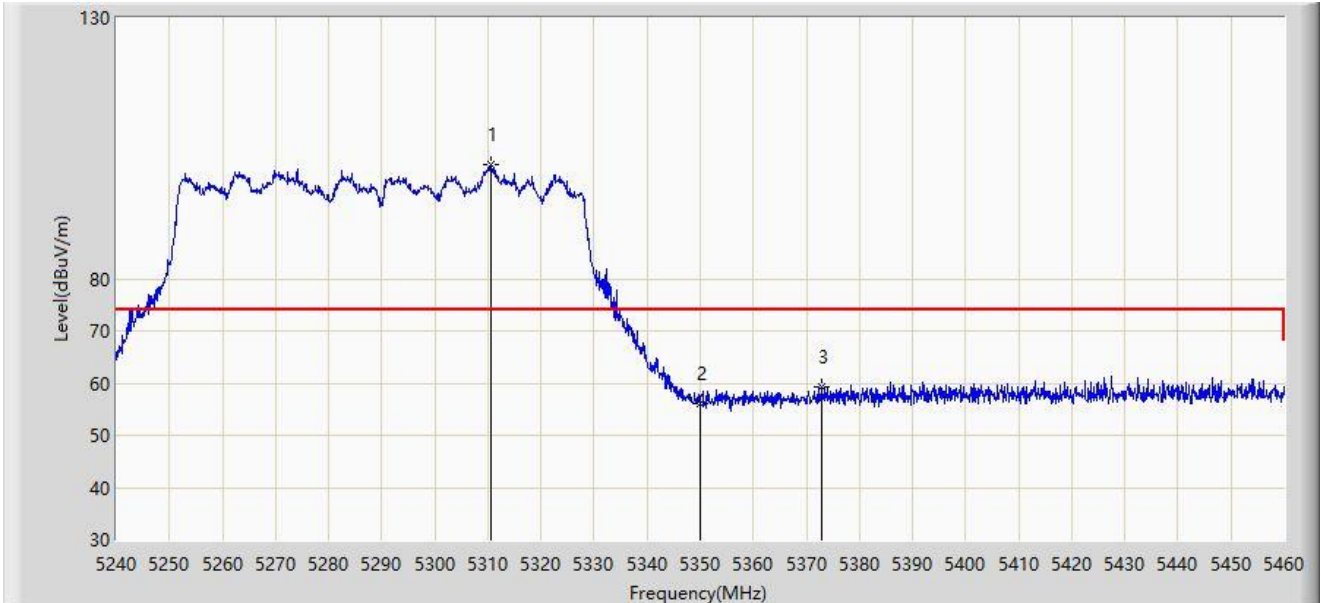


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5310.620	101.939	98.610	N/A	N/A	3.329	PK
2		5350.000	56.066	52.721	-17.934	74.000	3.344	PK
3	*	5372.770	59.300	55.941	-14.700	74.000	3.358	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 11:56
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

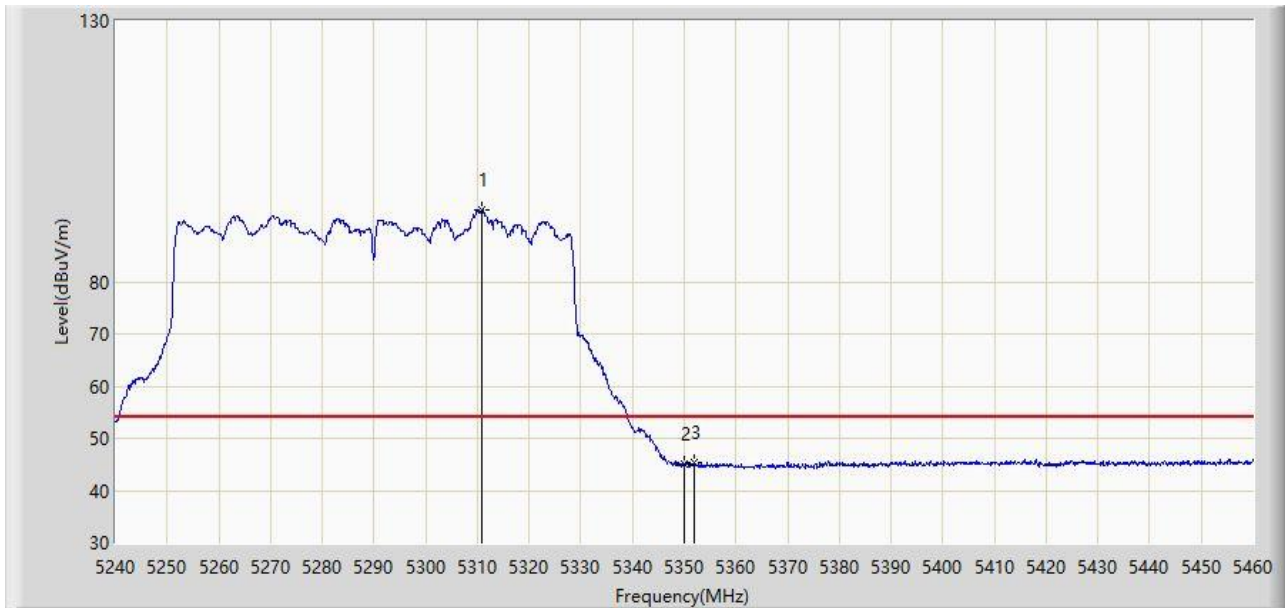


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5310.950	93.868	90.538	N/A	N/A	3.330	AV
2		5350.000	45.047	41.702	-8.953	54.000	3.344	AV
3	*	5351.870	45.257	41.944	-8.743	54.000	3.314	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 11:53
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

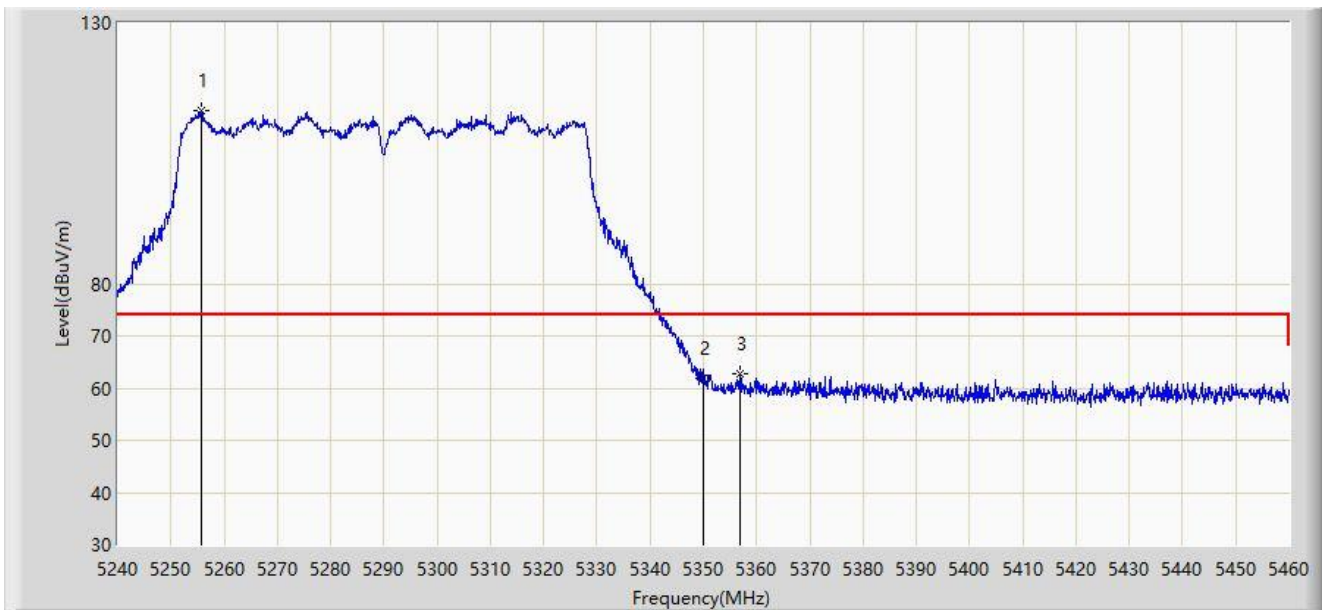


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5255.620	113.274	110.000	N/A	N/A	3.274	PK
2		5350.000	62.014	58.669	-11.986	74.000	3.344	PK
3	*	5356.930	62.803	59.506	-11.197	74.000	3.297	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 11:50
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

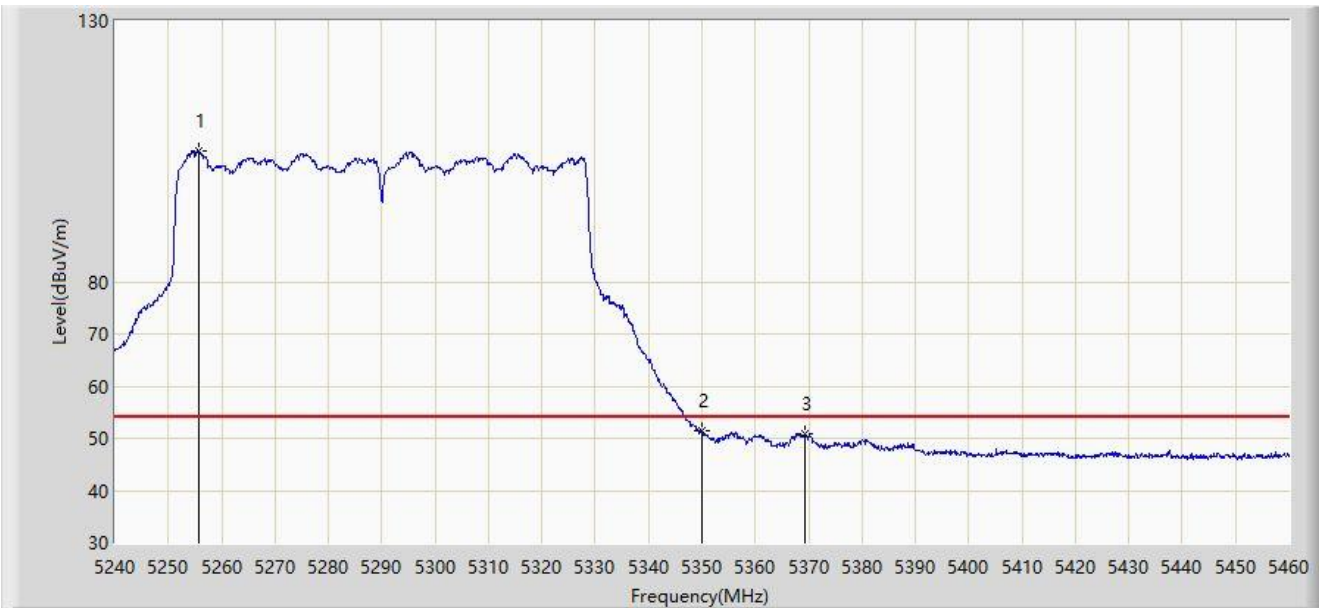


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5255.620	105.062	101.788	N/A	N/A	3.274	AV
2	*	5350.000	51.394	48.049	-2.606	54.000	3.344	AV
3		5369.250	51.002	47.714	-2.998	54.000	3.289	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 12:35
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

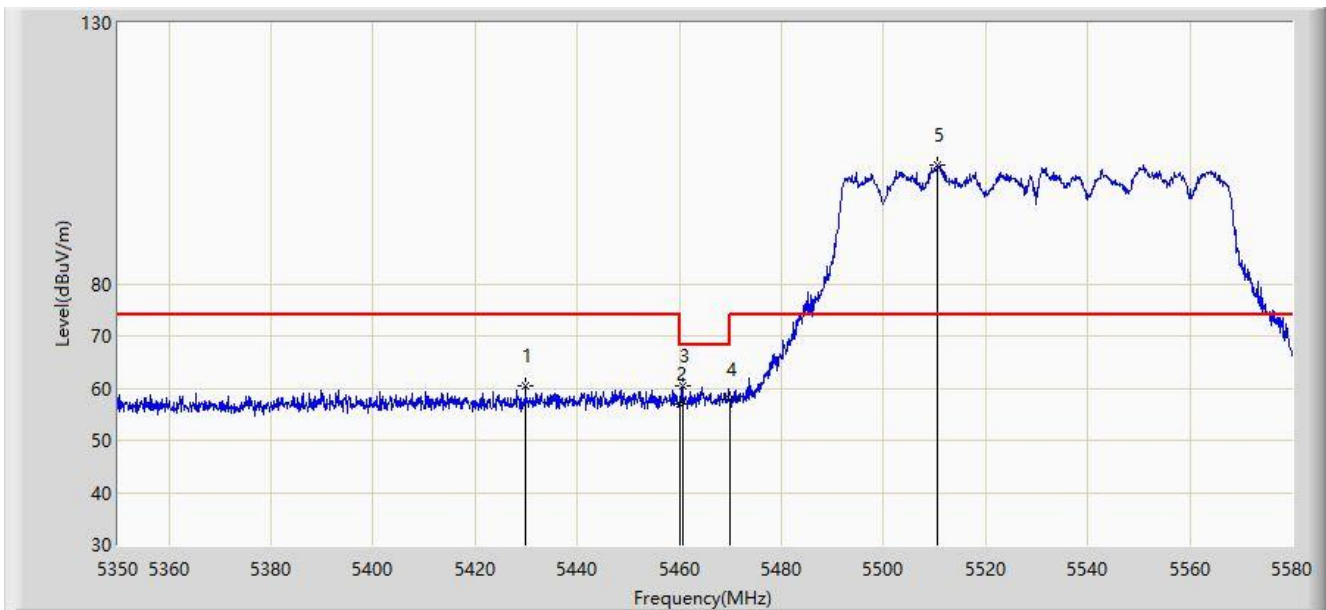


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5429.810	60.467	56.906	-13.533	74.000	3.561	PK
2		5460.000	57.010	53.380	-16.990	74.000	3.630	PK
3	*	5460.630	60.395	56.761	-7.805	68.200	3.634	PK
4		5470.000	57.796	54.105	-10.404	68.200	3.691	PK
5		5510.540	102.654	98.867	N/A	N/A	3.787	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 12:32
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

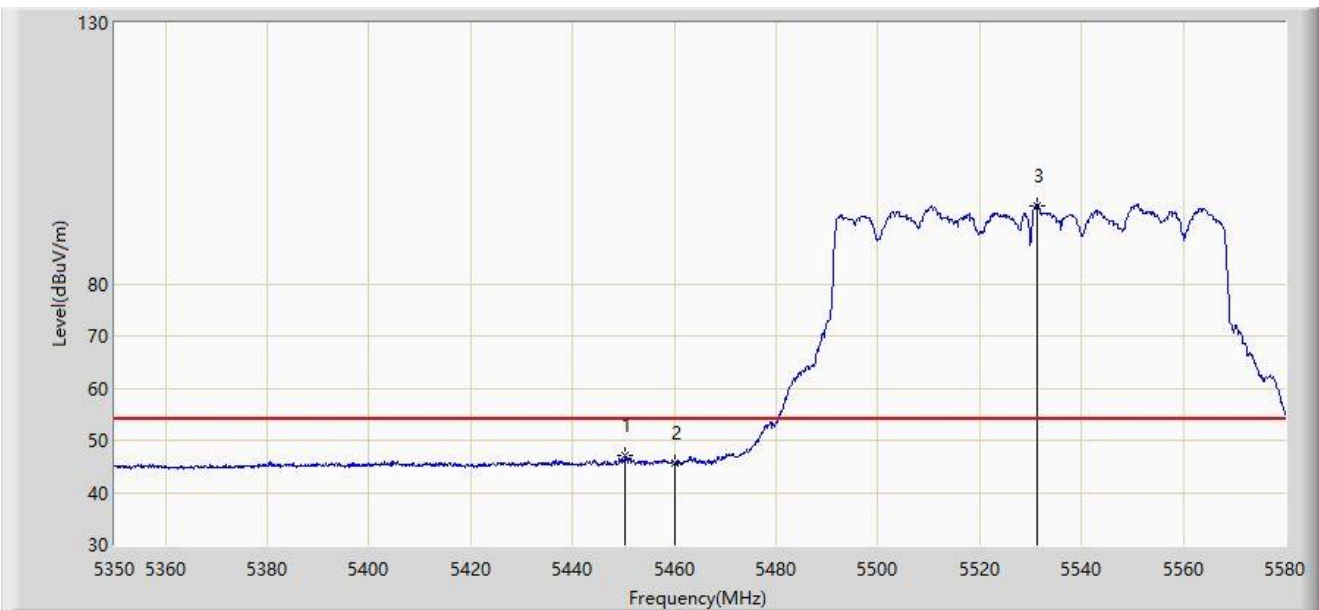


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5450.280	46.961	43.407	-7.039	54.000	3.553	AV
2		5460.000	45.737	42.107	-8.263	54.000	3.630	AV
3		5531.240	95.069	91.474	N/A	N/A	3.594	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 12:36
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

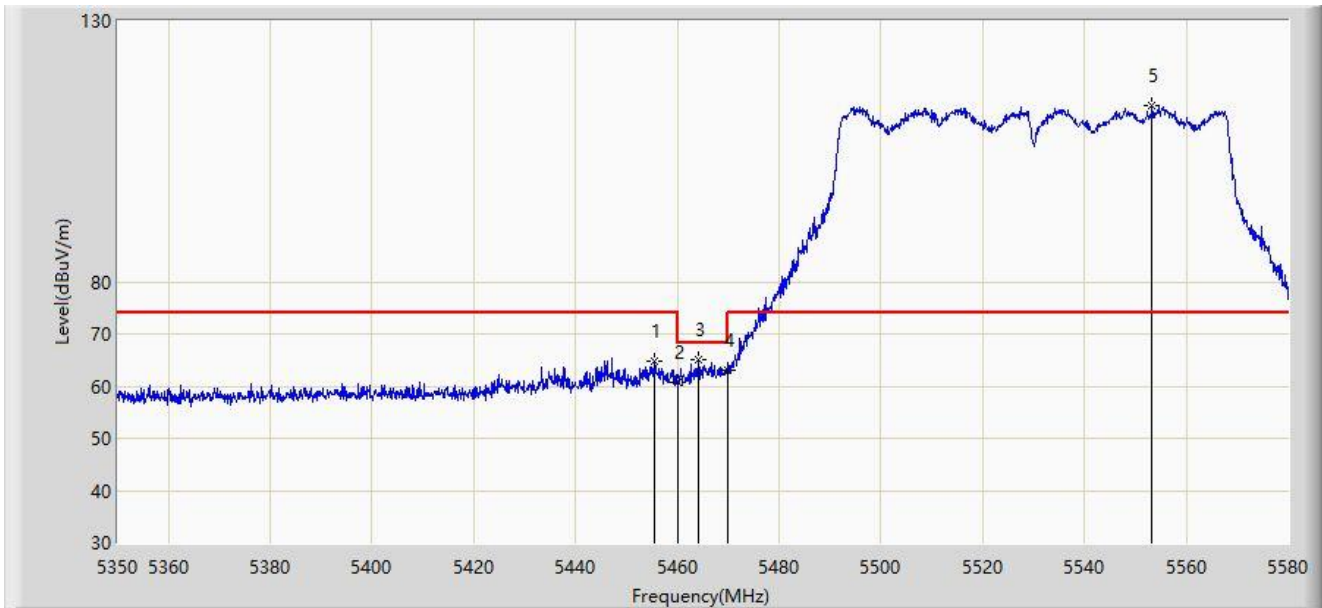


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5455.455	64.682	61.097	-9.318	74.000	3.584	PK
2		5460.000	60.786	57.156	-13.214	74.000	3.630	PK
3	*	5464.080	65.095	61.440	-3.105	68.200	3.655	PK
4		5470.000	63.032	59.341	-5.168	68.200	3.691	PK
5		5553.320	113.786	110.076	N/A	N/A	3.710	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 12:38
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

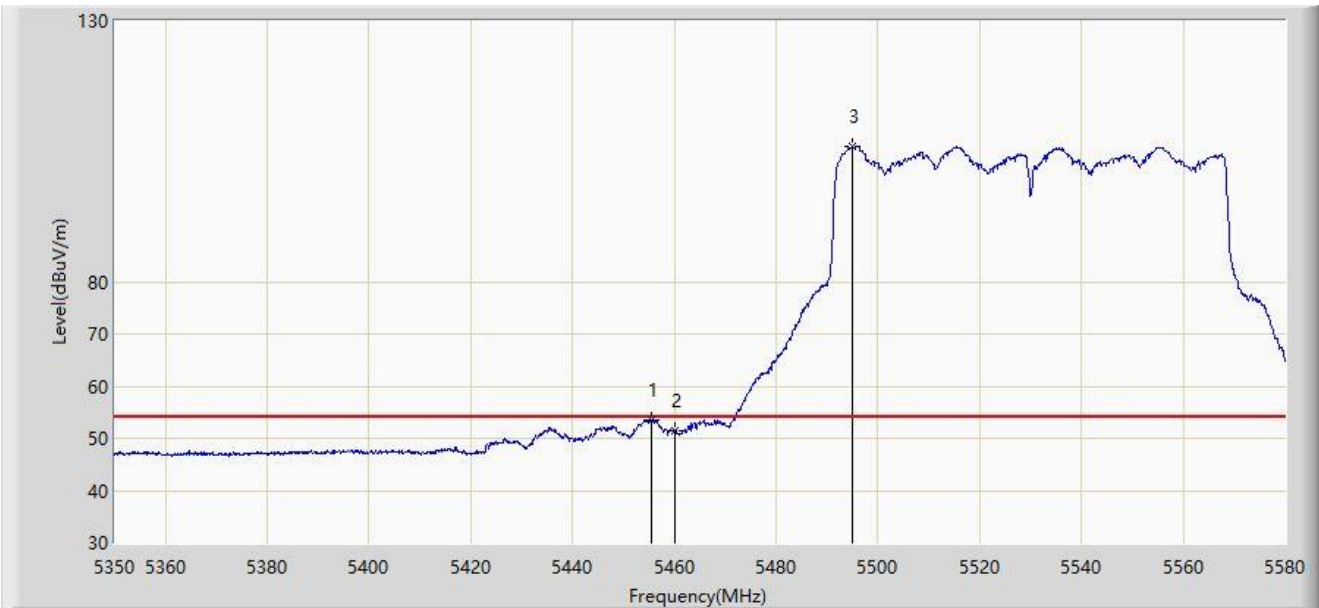


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5455.455	53.610	50.025	-0.390	54.000	3.584	AV
2		5460.000	51.419	47.789	-2.581	54.000	3.630	AV
3		5495.015	105.996	102.063	N/A	N/A	3.933	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 12:48
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

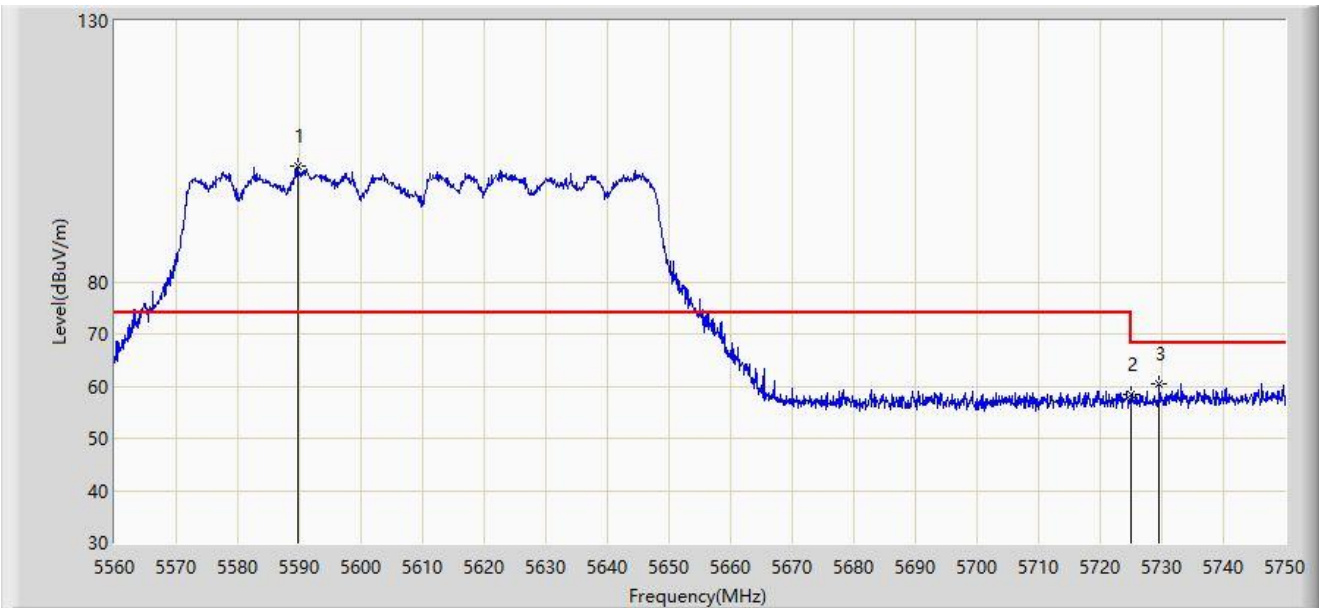


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5589.735	102.070	98.186	N/A	N/A	3.884	PK
2		5725.000	58.381	54.438	-9.819	68.200	3.943	PK
3	*	5729.575	60.480	56.490	-7.720	68.200	3.989	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 12:45
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

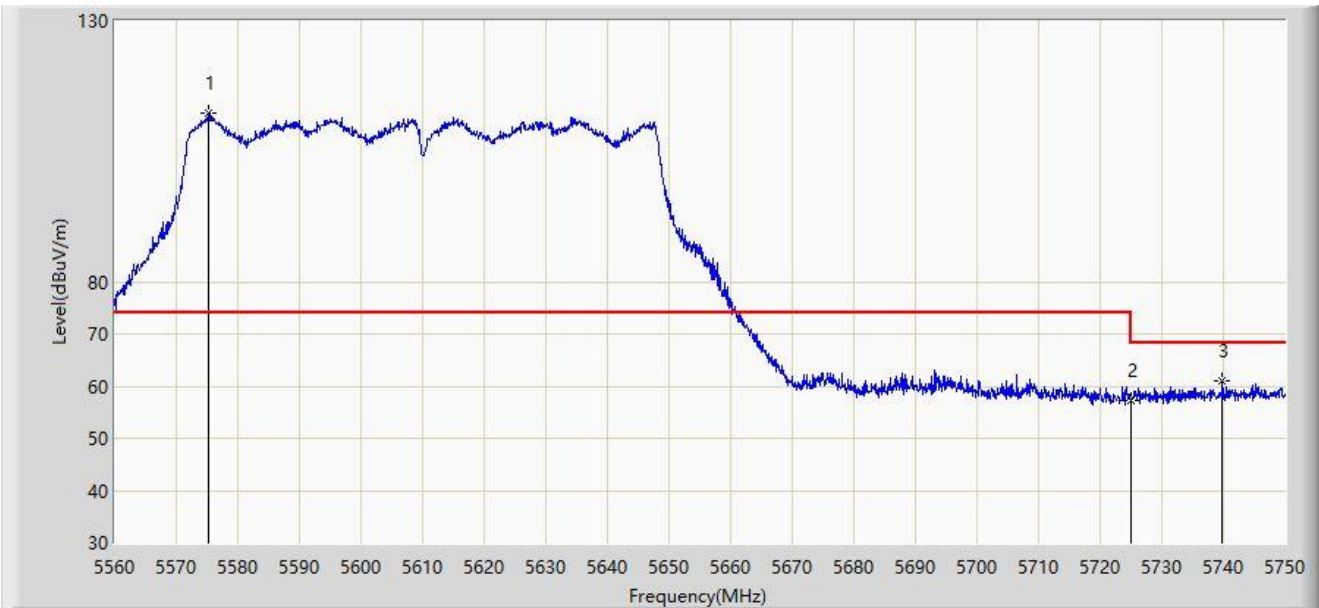


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5575.295	112.189	108.346	N/A	N/A	3.843	PK
2		5725.000	57.299	53.356	-10.901	68.200	3.943	PK
3	*	5739.835	61.009	56.889	-7.191	68.200	4.121	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:19
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

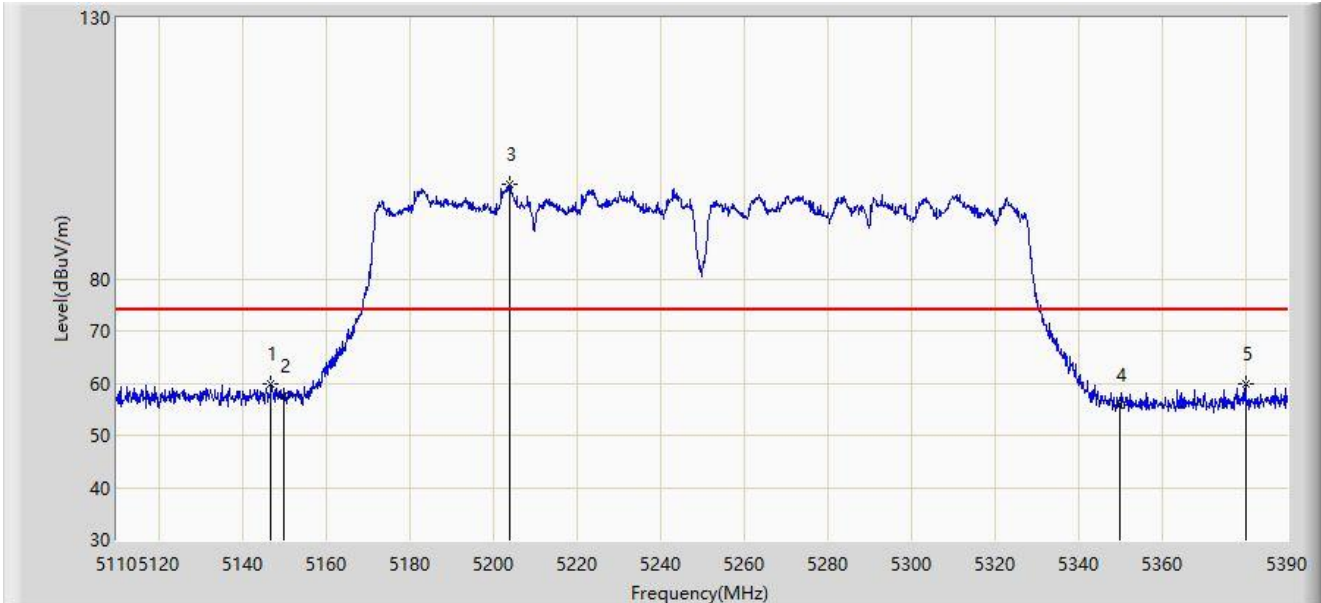


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5146.960	59.821	56.175	-14.179	74.000	3.646	PK
2		5150.000	57.490	53.849	-16.510	74.000	3.641	PK
3		5203.940	98.087	94.798	N/A	N/A	3.290	PK
4		5350.000	55.805	52.460	-18.195	74.000	3.344	PK
5	*	5380.060	59.822	56.318	-14.178	74.000	3.504	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:21
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

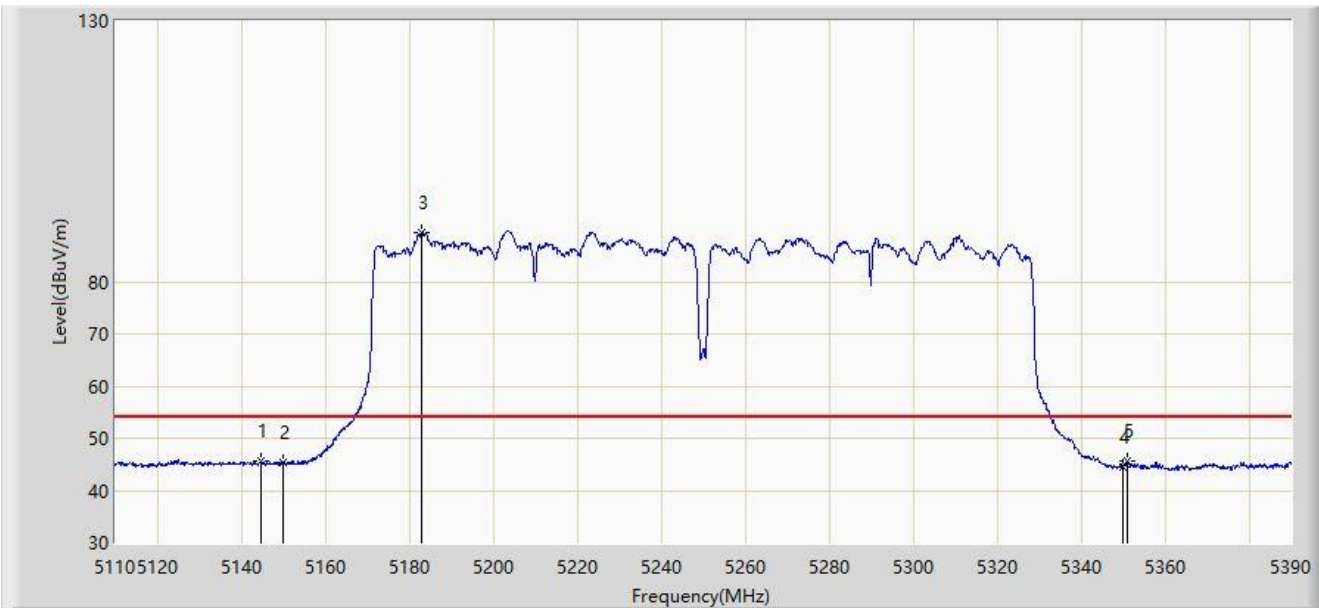


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.720	45.576	41.936	-8.424	54.000	3.640	AV
2		5150.000	45.270	41.629	-8.730	54.000	3.641	AV
3		5183.080	89.488	86.152	N/A	N/A	3.336	AV
4		5350.000	44.574	41.229	-9.426	54.000	3.344	AV
5		5351.220	45.508	42.184	-8.492	54.000	3.325	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:17
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

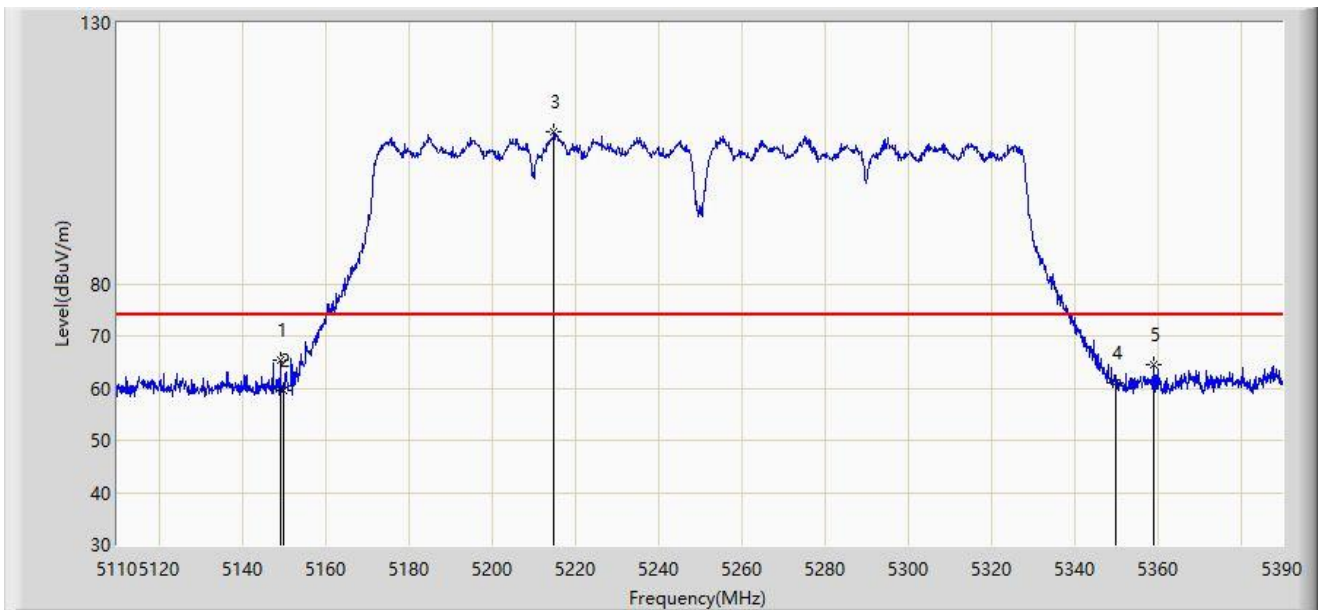


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.200	65.497	61.853	-8.503	74.000	3.644	PK
2		5150.000	59.655	56.014	-14.345	74.000	3.641	PK
3		5215.000	108.989	105.683	N/A	N/A	3.306	PK
4		5350.000	61.092	57.747	-12.908	74.000	3.344	PK
5		5359.200	64.520	61.230	-9.480	74.000	3.290	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:15
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

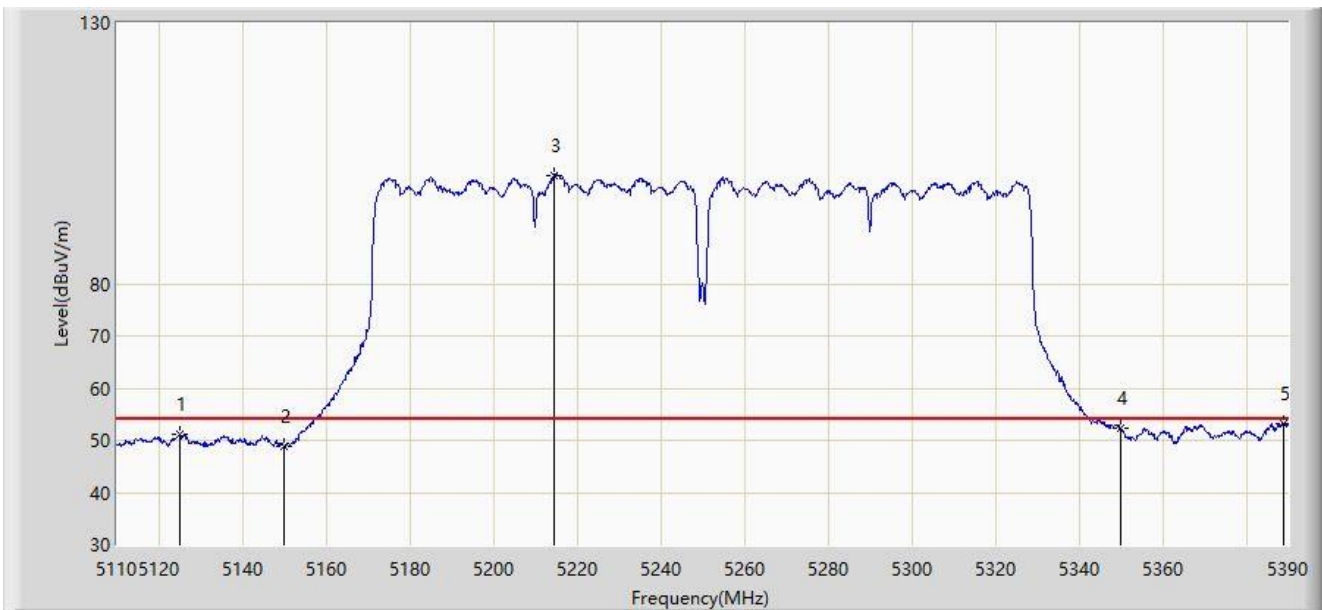


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5125.120	51.303	47.795	-2.697	54.000	3.508	AV
2		5150.000	48.856	45.215	-5.144	54.000	3.641	AV
3		5214.580	100.734	97.428	N/A	N/A	3.306	AV
4		5350.000	52.281	48.936	-1.719	54.000	3.344	AV
5	*	5389.020	53.308	49.680	-0.692	54.000	3.628	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:39
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

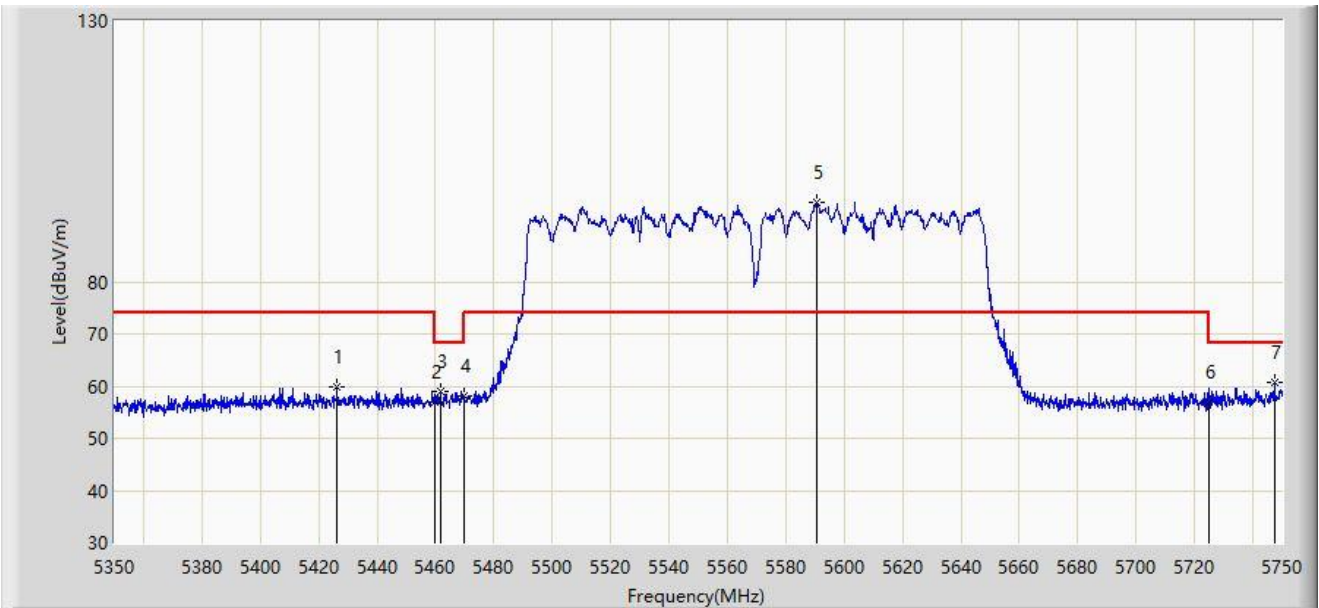


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5426.400	59.837	56.266	-14.163	74.000	3.572	PK
2		5460.000	56.980	53.350	-17.020	74.000	3.630	PK
3		5461.600	58.847	55.207	-9.353	68.200	3.640	PK
4		5470.000	58.145	54.454	-10.055	68.200	3.691	PK
5		5590.600	95.117	91.232	N/A	N/A	3.885	PK
6		5725.000	56.878	52.935	-11.322	68.200	3.943	PK
7	*	5747.400	60.686	56.509	-7.514	68.200	4.177	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:40
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

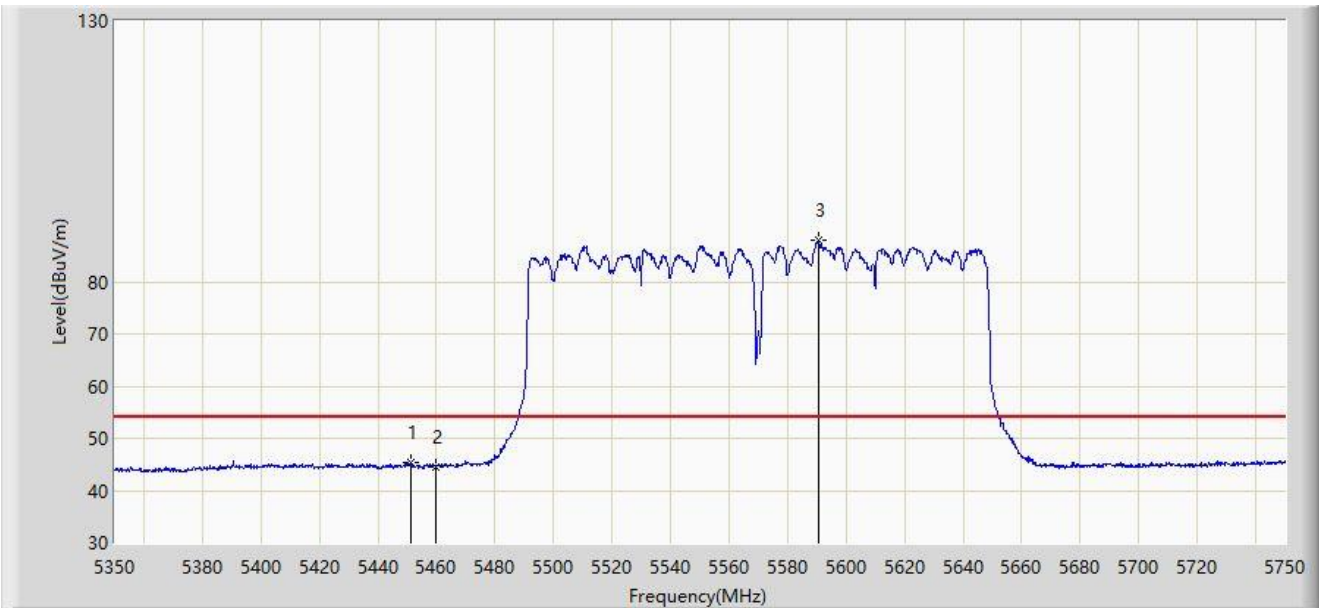


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5451.200	45.405	41.850	-8.595	54.000	3.555	AV
2		5460.000	44.579	40.949	-9.421	54.000	3.630	AV
3		5590.400	87.870	83.984	N/A	N/A	3.885	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:37
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

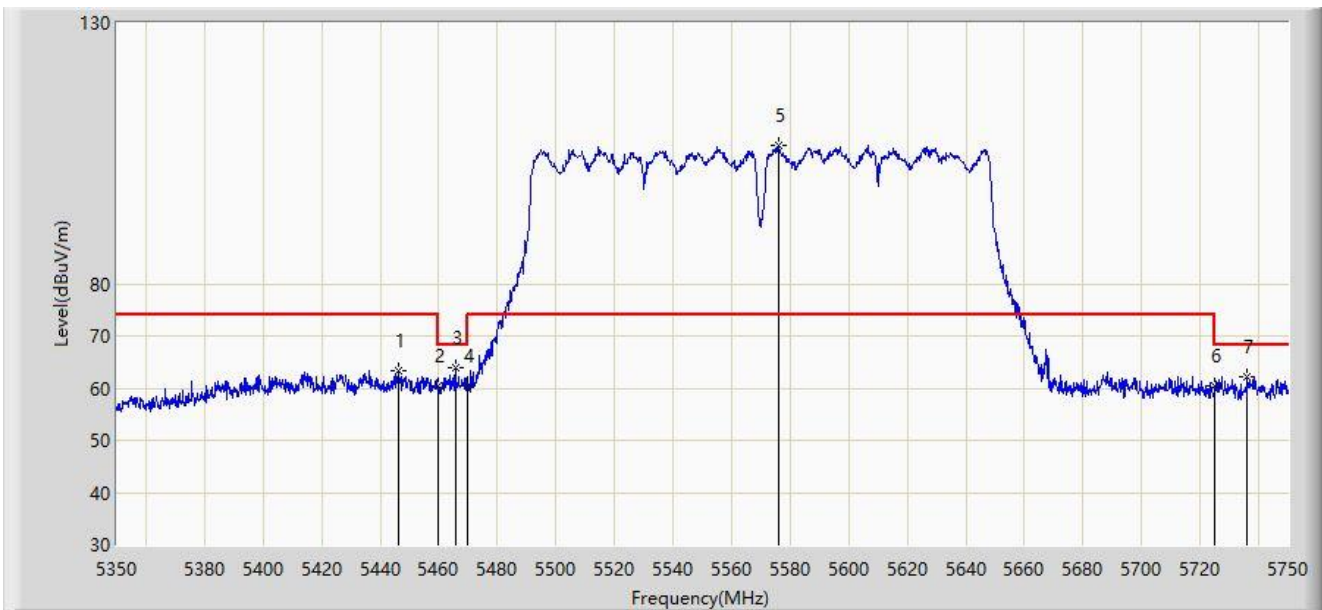


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5446.000	63.293	59.744	-10.707	74.000	3.548	PK
2		5460.000	60.557	56.927	-13.443	74.000	3.630	PK
3	*	5465.600	64.038	60.374	-4.162	68.200	3.664	PK
4		5470.000	60.438	56.747	-7.762	68.200	3.691	PK
5		5576.200	106.647	102.805	N/A	N/A	3.842	PK
6		5725.000	60.546	56.603	-7.654	68.200	3.943	PK
7		5736.000	62.214	58.143	-5.986	68.200	4.072	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 13:35
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

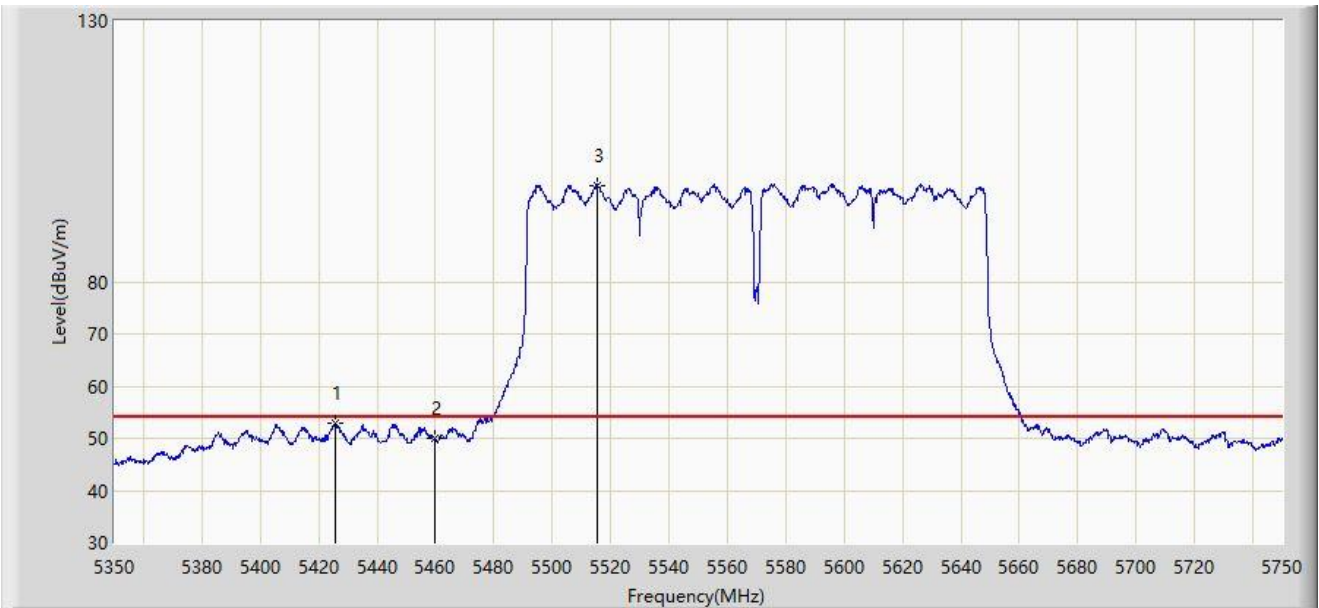


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5425.600	52.826	49.252	-1.174	54.000	3.574	AV
2		5460.000	50.050	46.420	-3.950	54.000	3.630	AV
3		5515.200	98.534	94.798	N/A	N/A	3.737	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:13
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

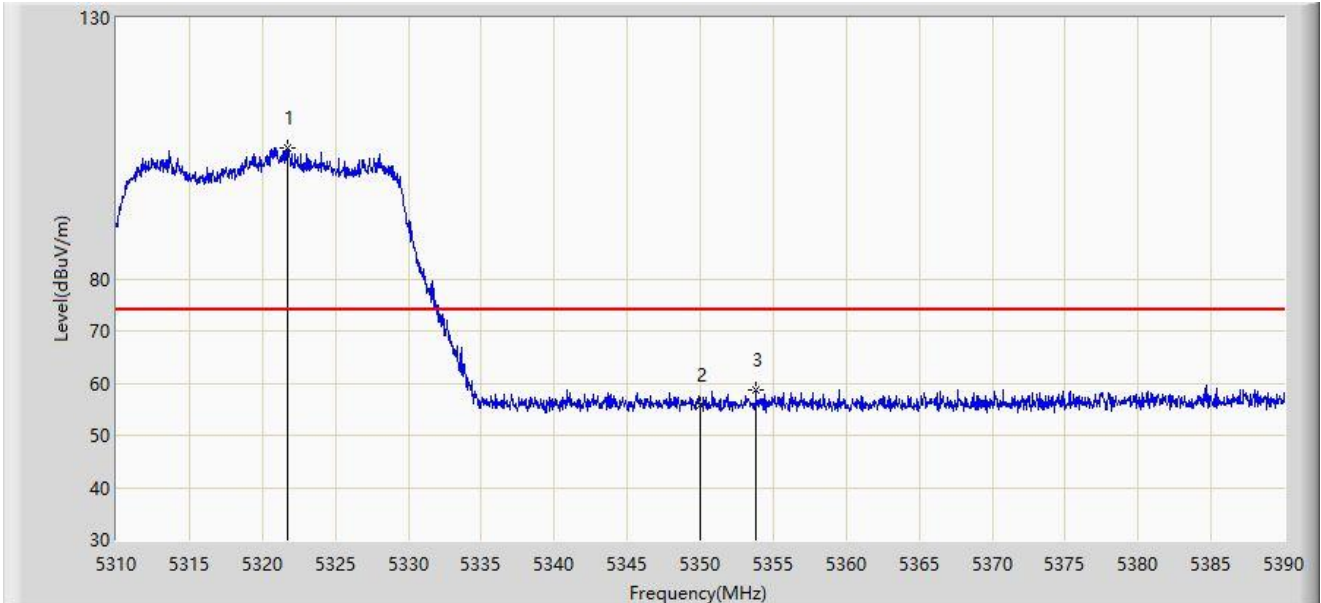


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.680	105.133	101.729	N/A	N/A	3.403	PK
2		5350.000	55.694	52.349	-18.306	74.000	3.344	PK
3	*	5353.800	58.651	55.345	-15.349	74.000	3.306	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:14
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

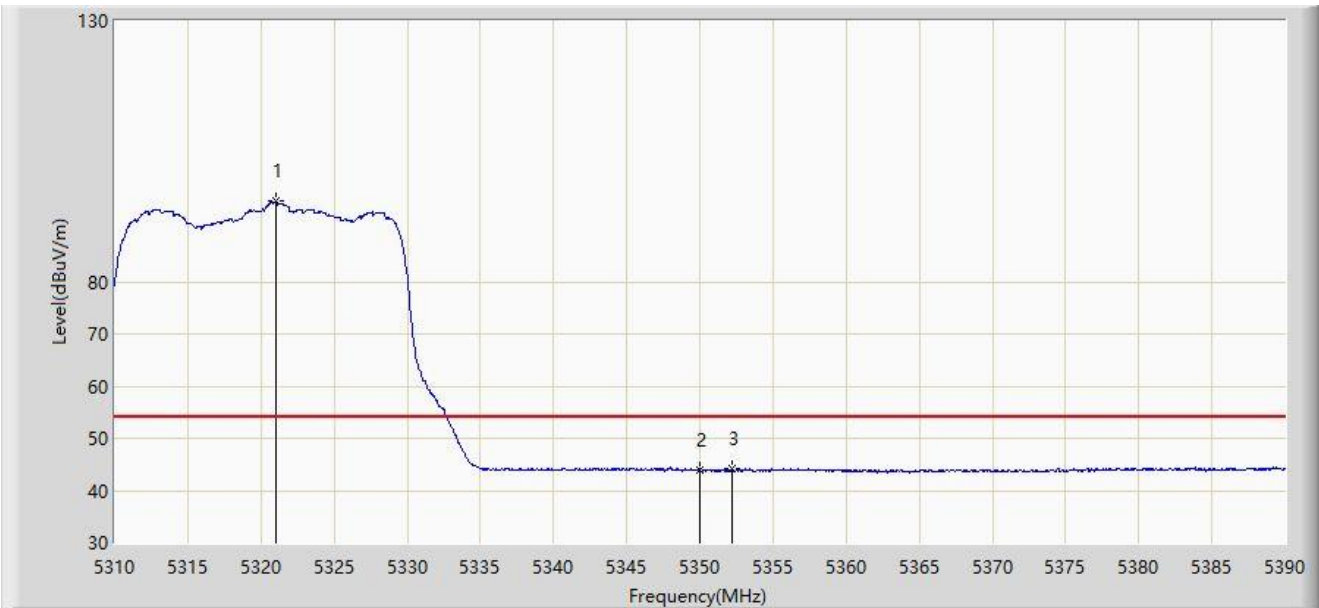


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.000	95.392	91.989	N/A	N/A	3.403	AV
2		5350.000	43.952	40.607	-10.048	54.000	3.344	AV
3	*	5352.200	44.201	40.890	-9.799	54.000	3.310	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:11
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

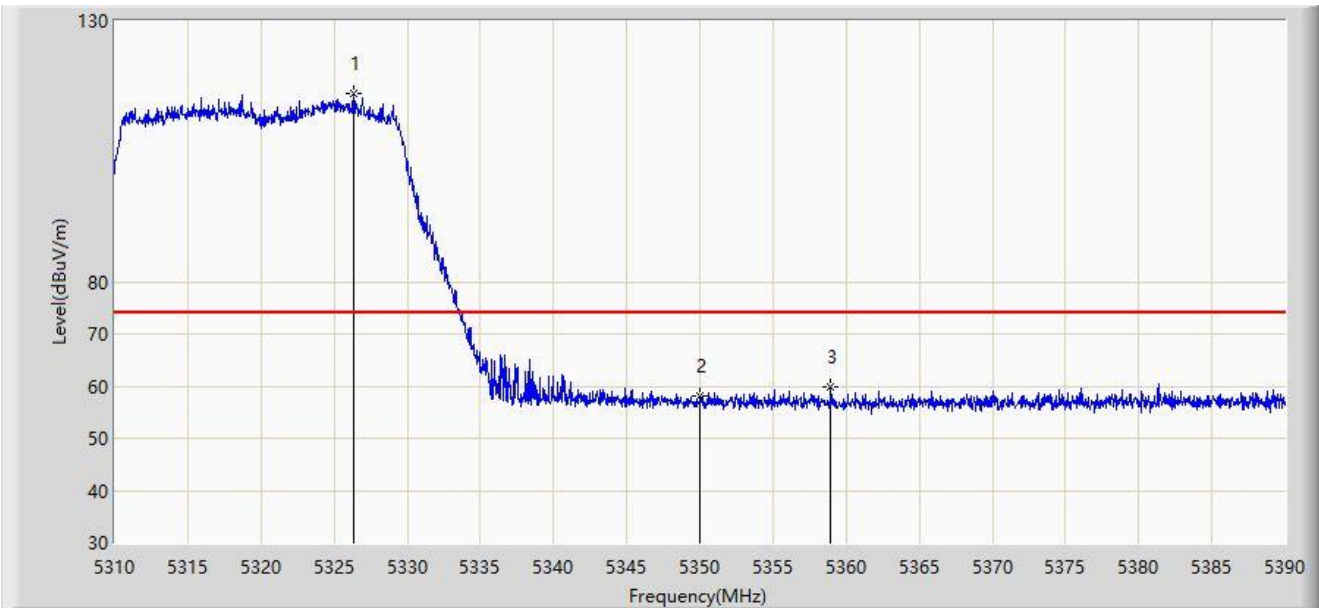


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5326.320	115.966	112.557	N/A	N/A	3.410	PK
2		5350.000	58.127	54.782	-15.873	74.000	3.344	PK
3	*	5358.960	59.895	56.604	-14.105	74.000	3.290	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:08
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

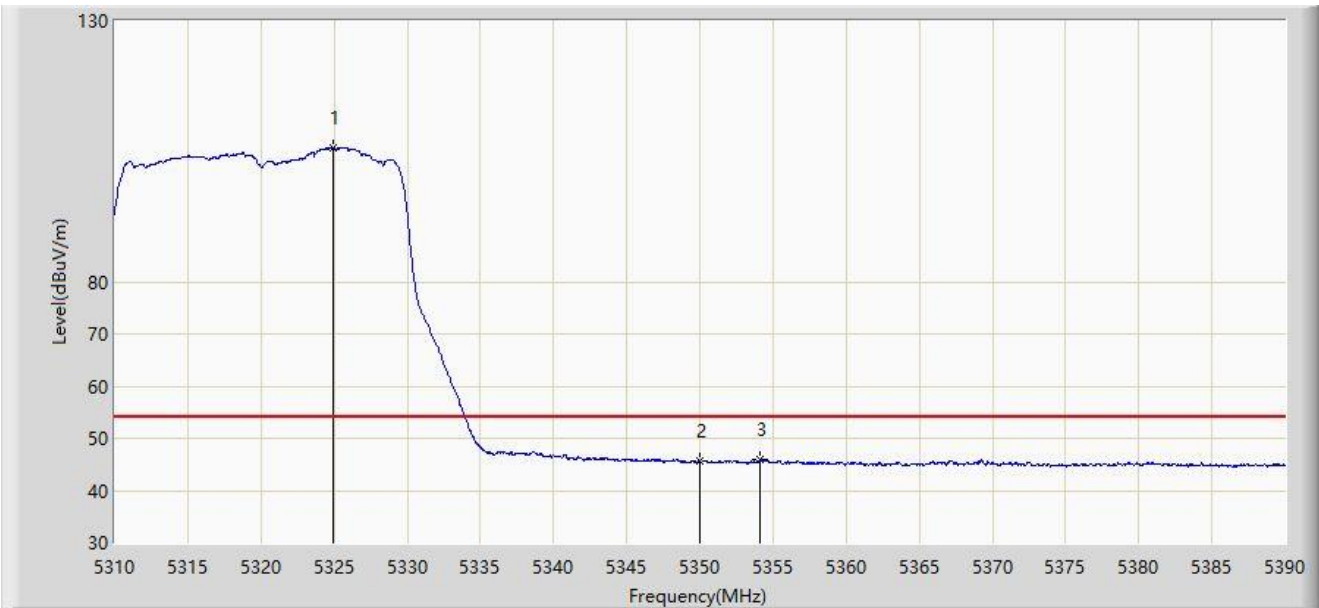


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5324.920	105.665	102.258	N/A	N/A	3.407	AV
2		5350.000	45.656	42.311	-8.344	54.000	3.344	AV
3	*	5354.160	45.960	42.655	-8.040	54.000	3.305	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:20
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

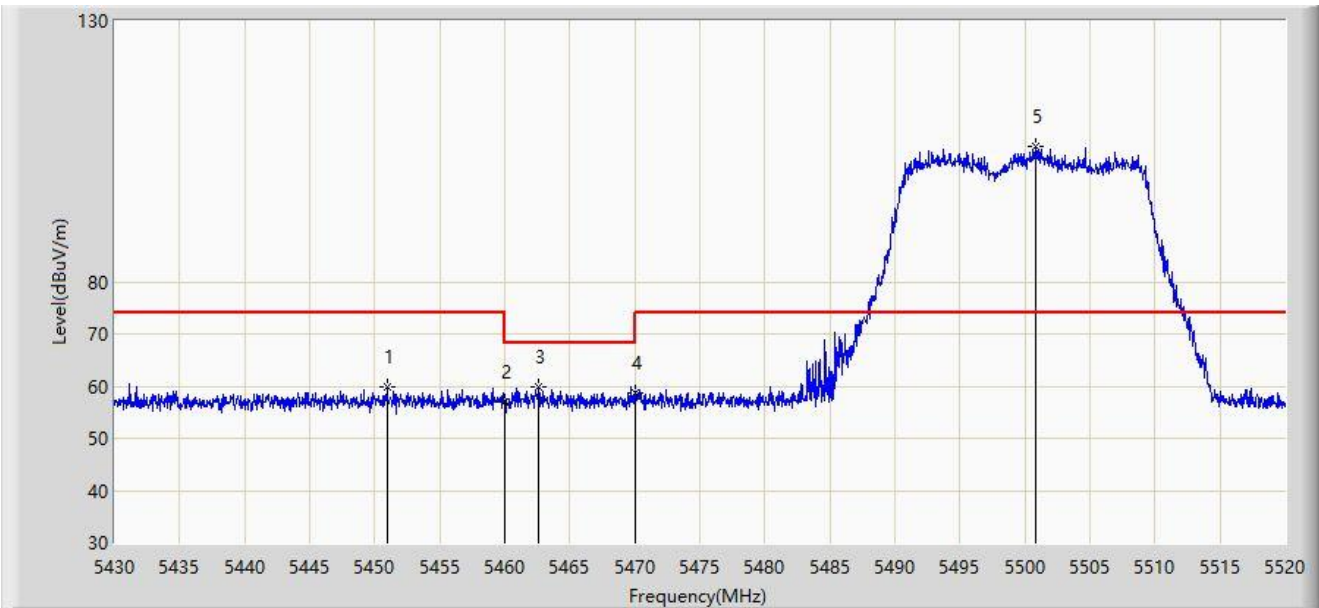


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5450.925	59.711	56.157	-14.289	74.000	3.555	PK
2		5460.000	57.084	53.454	-16.916	74.000	3.630	PK
3	*	5462.625	59.910	56.264	-8.290	68.200	3.647	PK
4		5470.000	58.650	54.959	-9.550	68.200	3.691	PK
5		5500.875	105.836	101.958	N/A	N/A	3.878	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:21
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

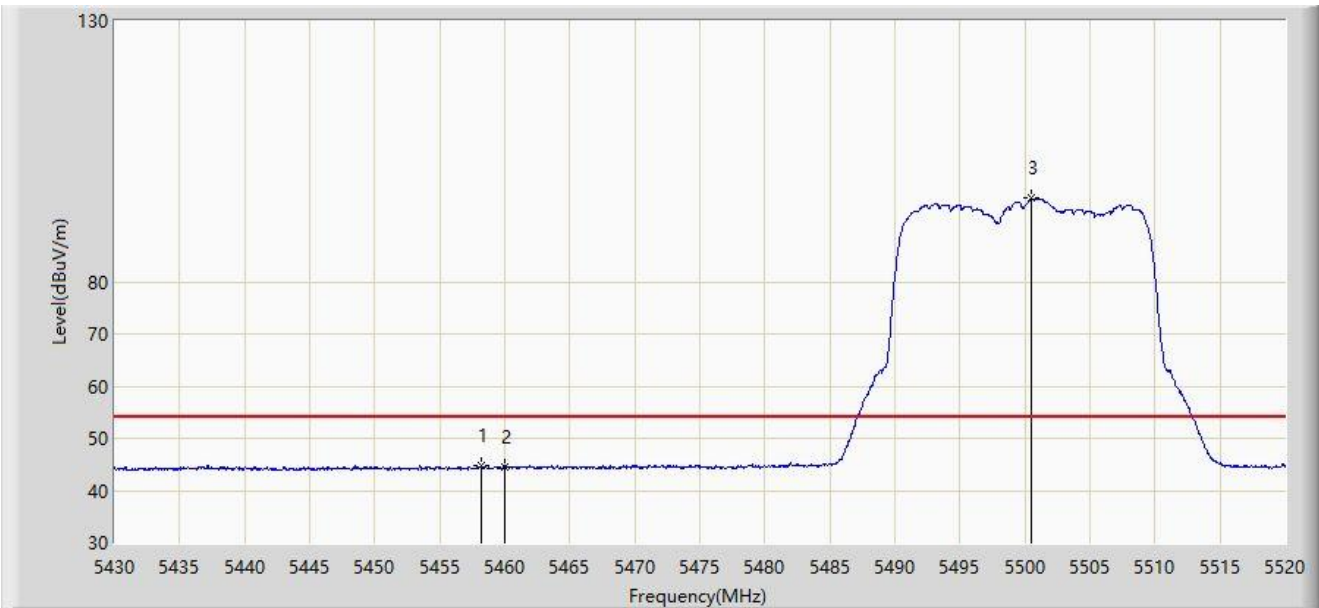


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.170	44.683	41.064	-9.317	54.000	3.619	AV
2		5460.000	44.582	40.952	-9.418	54.000	3.630	AV
3		5500.515	96.060	92.179	N/A	N/A	3.881	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 17:04
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

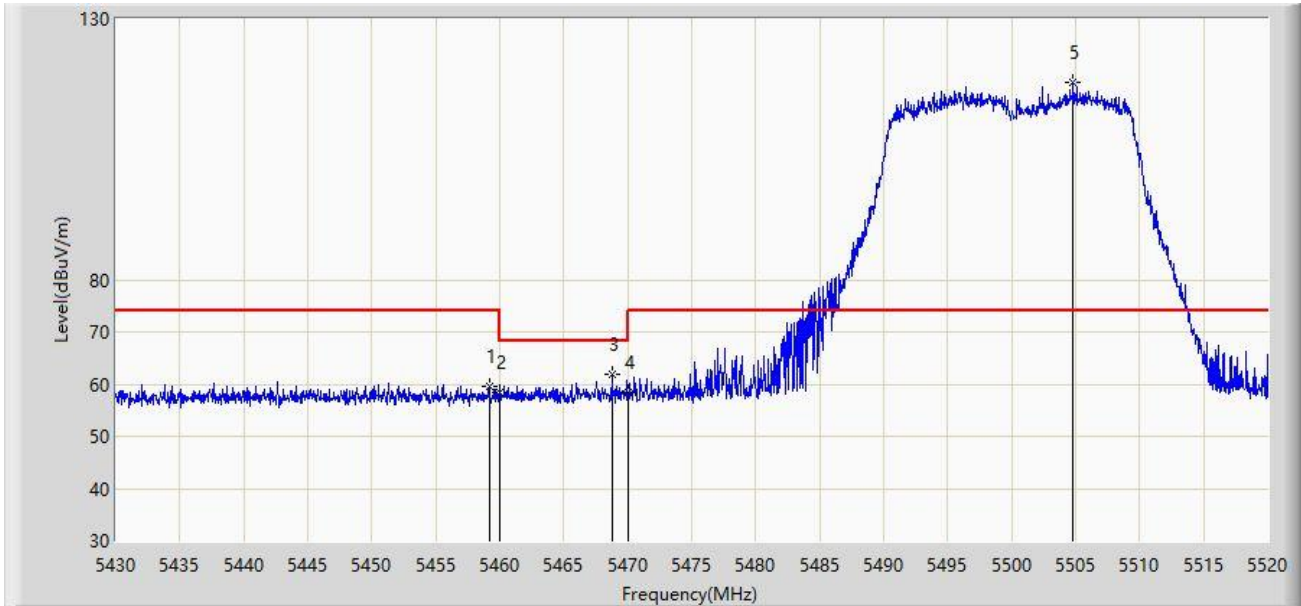


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.160	59.523	55.898	-14.477	74.000	3.625	PK
2		5460.000	58.286	54.656	-15.714	74.000	3.630	PK
3	*	5468.745	61.990	58.307	-6.210	68.200	3.683	PK
4		5470.000	58.361	54.670	-9.839	68.200	3.691	PK
5		5504.790	117.693	113.852	N/A	N/A	3.841	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:18
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

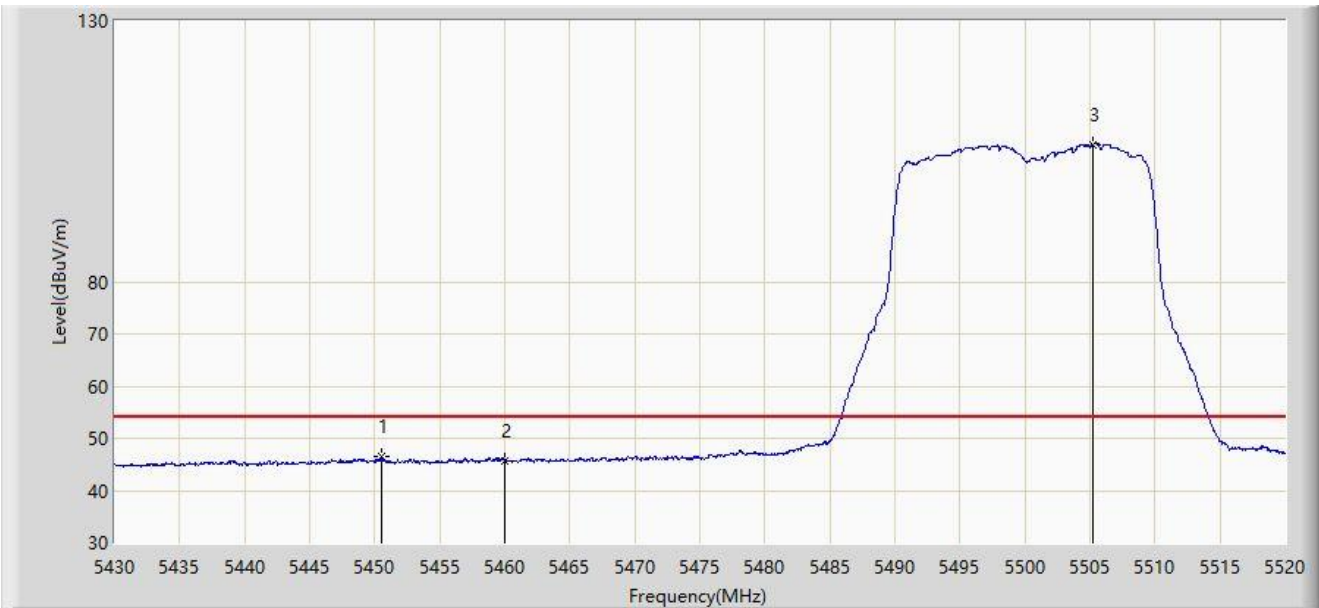


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5450.565	46.383	42.829	-7.617	54.000	3.554	AV
2		5460.000	45.679	42.049	-8.321	54.000	3.630	AV
3		5505.240	106.363	102.526	N/A	N/A	3.836	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:26
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

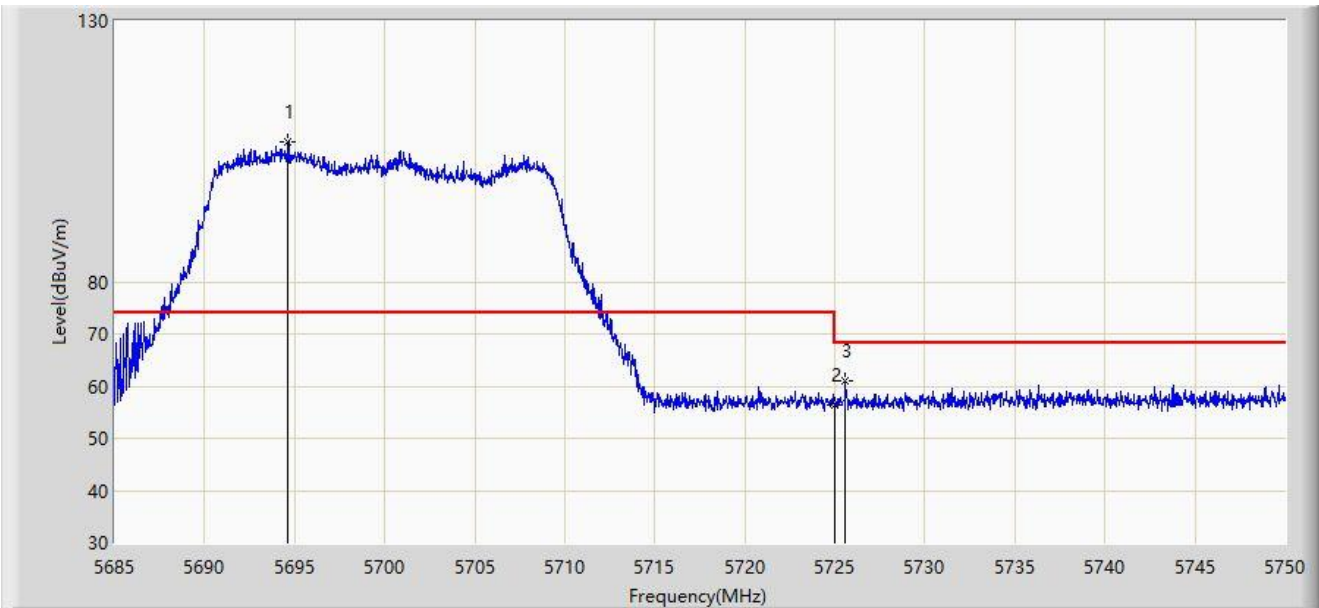


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5694.652	106.790	102.865	N/A	N/A	3.925	PK
2		5725.000	56.412	52.469	-11.788	68.200	3.943	PK
3	*	5725.592	60.977	57.032	-7.223	68.200	3.944	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 14:23
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

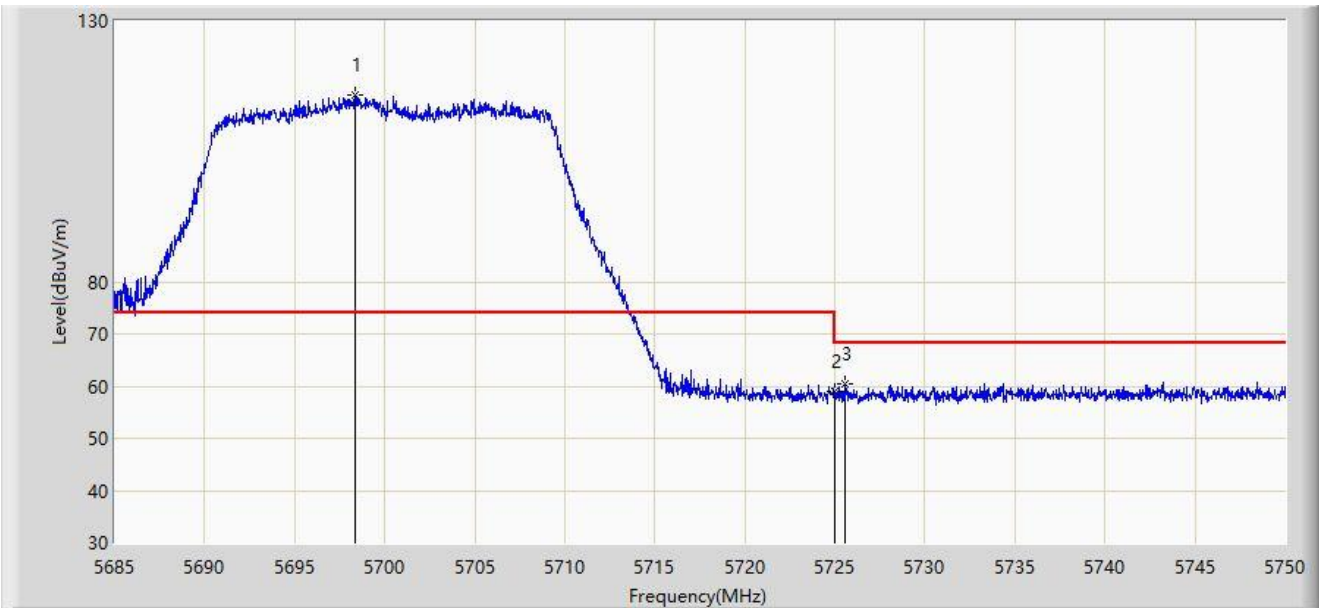


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5698.325	115.859	111.941	N/A	N/A	3.918	PK
2		5725.000	59.032	55.089	-9.168	68.200	3.943	PK
3	*	5725.592	60.371	56.426	-7.829	68.200	3.944	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:07
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

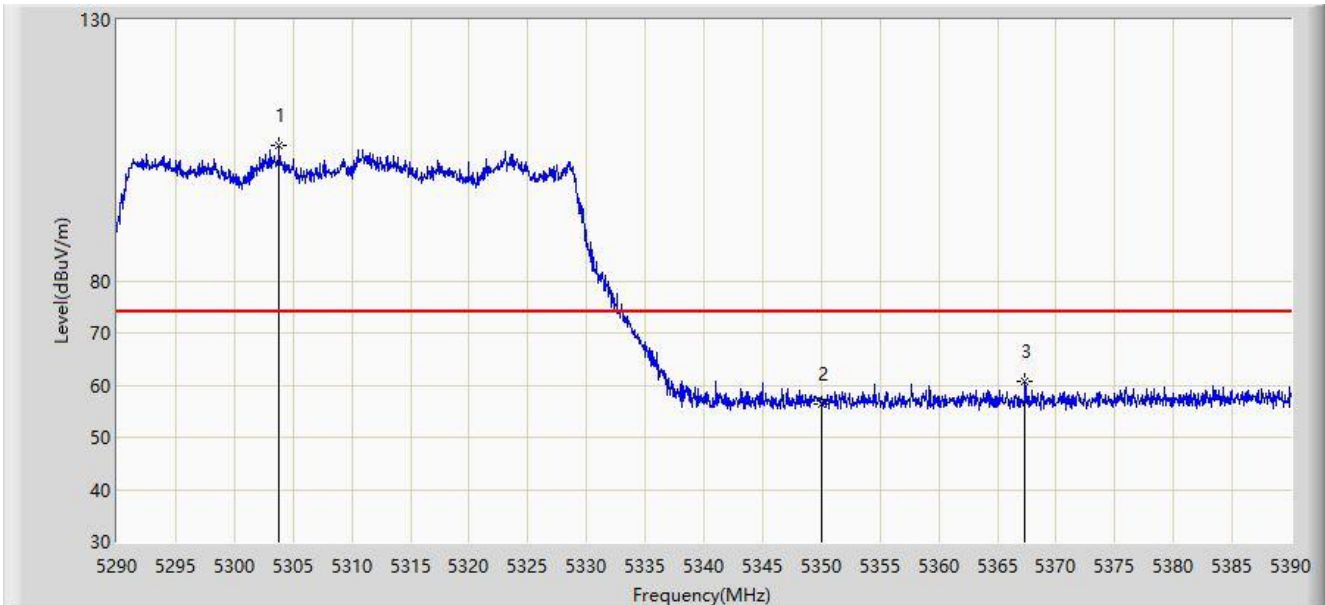


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5303.800	105.981	102.678	N/A	N/A	3.303	PK
2		5350.000	56.445	53.100	-17.555	74.000	3.344	PK
3	*	5367.350	60.745	57.476	-13.255	74.000	3.269	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:09
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

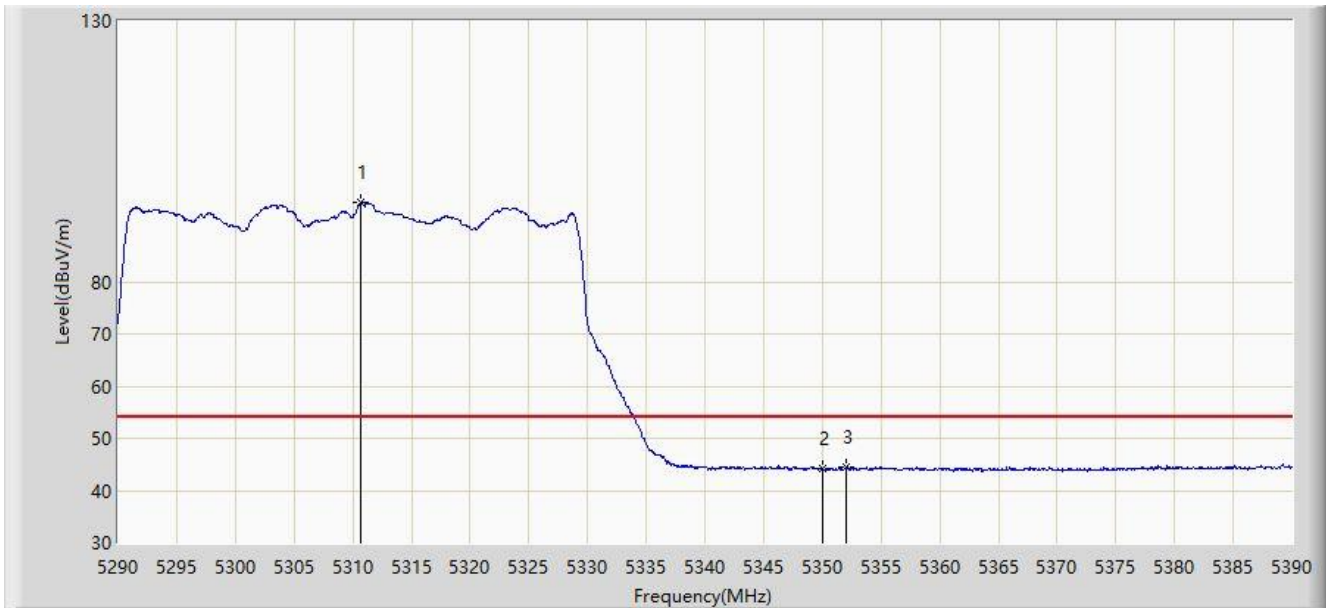


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5310.650	95.096	91.767	N/A	N/A	3.329	AV
2		5350.000	44.248	40.903	-9.752	54.000	3.344	AV
3	*	5352.000	44.484	41.173	-9.516	54.000	3.311	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:06
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

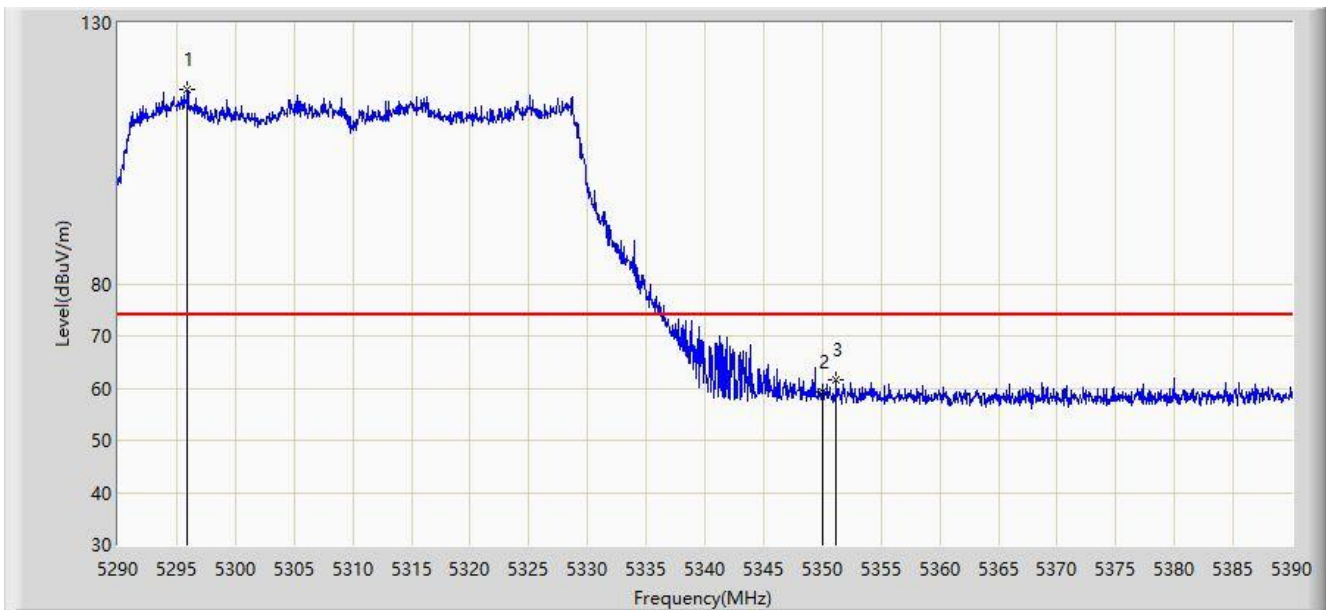


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5295.950	117.219	113.927	N/A	N/A	3.292	PK
2		5350.000	59.321	55.976	-14.679	74.000	3.344	PK
3	*	5351.200	61.545	58.220	-12.455	74.000	3.325	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:04
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

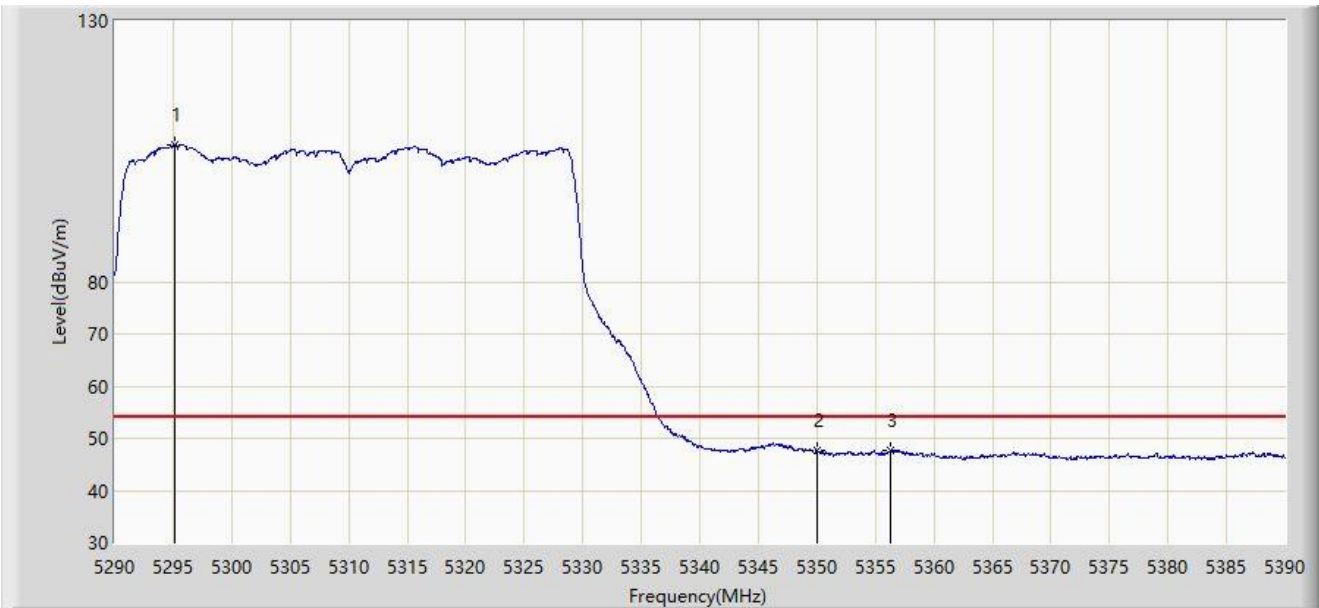


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5295.150	106.256	102.965	N/A	N/A	3.290	AV
2		5350.000	47.552	44.207	-6.448	54.000	3.344	AV
3	*	5356.350	47.637	44.339	-6.363	54.000	3.298	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:15
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

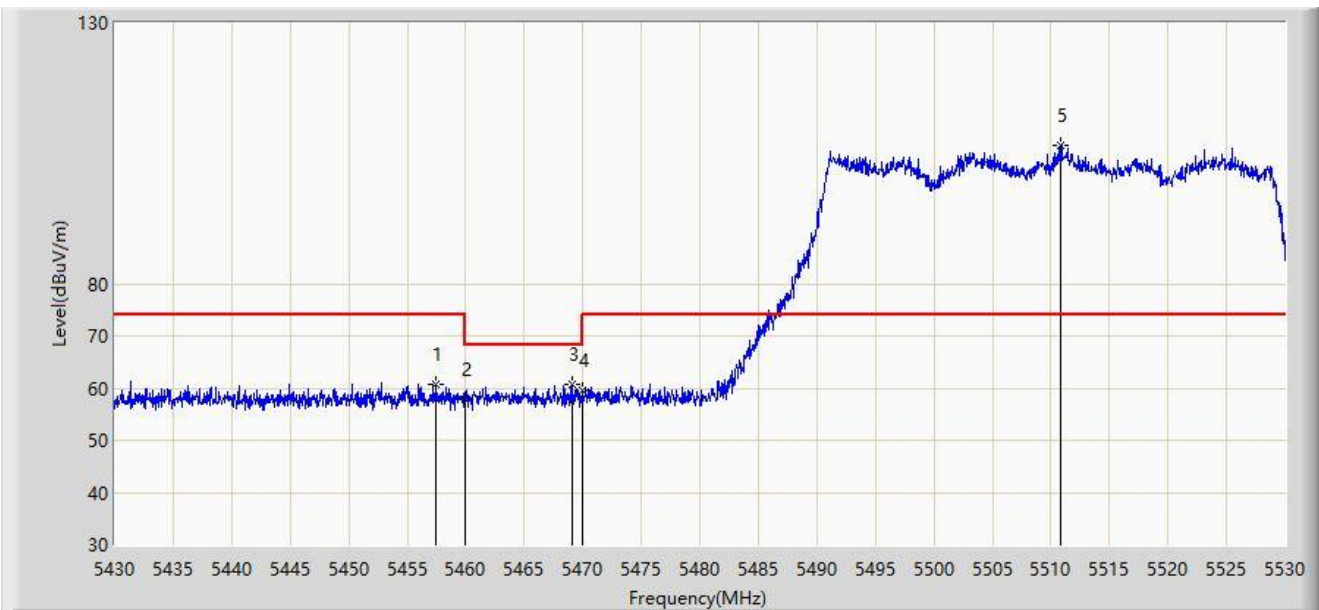


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.500	60.848	57.233	-13.152	74.000	3.615	PK
2		5460.000	57.885	54.255	-16.115	74.000	3.630	PK
3	*	5469.100	60.834	57.148	-7.366	68.200	3.686	PK
4		5470.000	59.492	55.801	-8.708	68.200	3.691	PK
5		5510.850	106.414	102.630	N/A	N/A	3.783	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:17
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

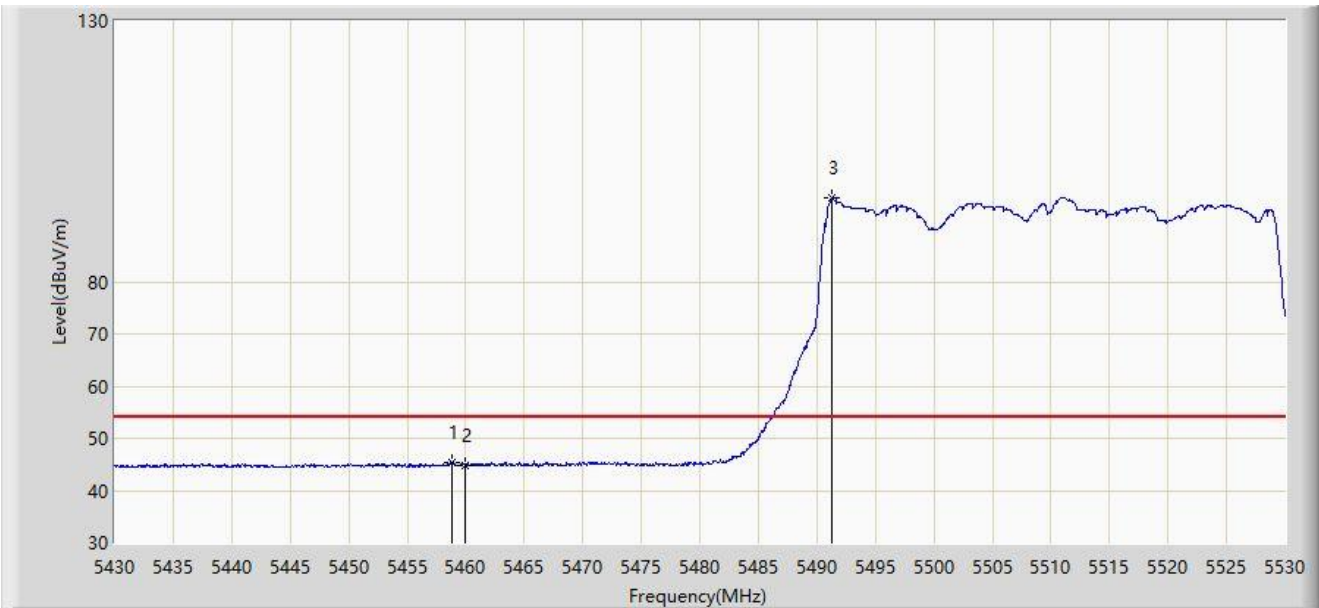


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5458.850	45.328	41.705	-8.672	54.000	3.623	AV
2		5460.000	44.859	41.229	-9.141	54.000	3.630	AV
3		5491.300	96.074	92.128	N/A	N/A	3.946	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:13
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

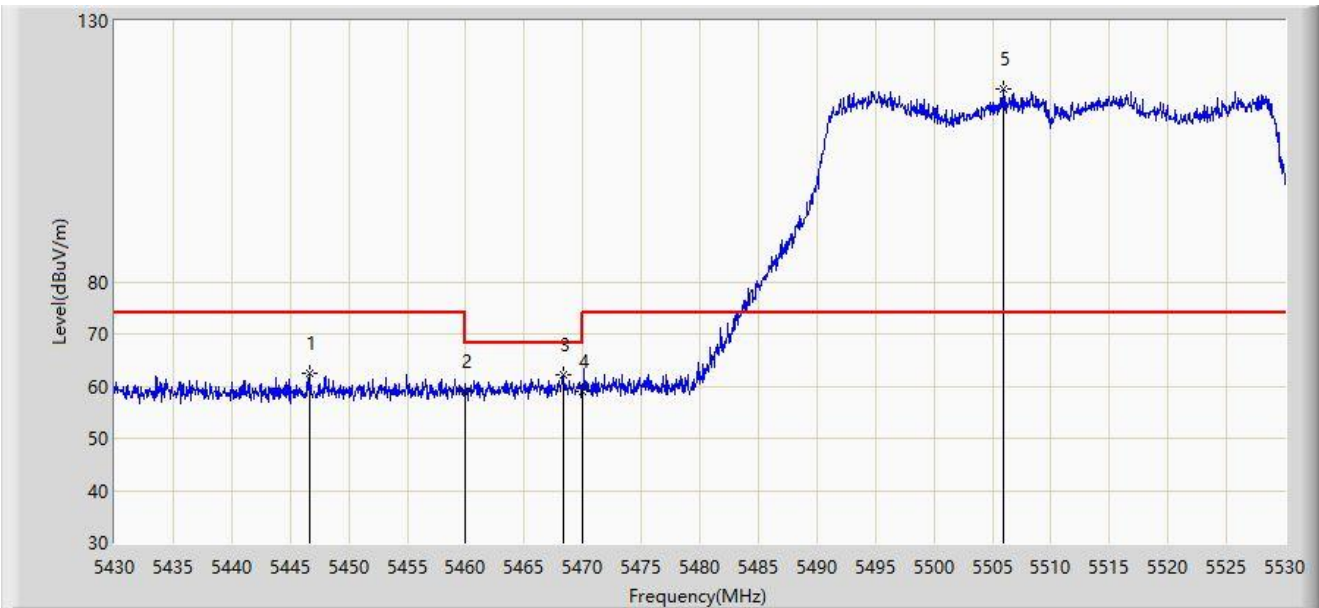


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5446.650	62.567	59.018	-11.433	74.000	3.550	PK
2		5460.000	58.872	55.242	-15.128	74.000	3.630	PK
3	*	5468.300	62.119	58.438	-6.081	68.200	3.681	PK
4		5470.000	59.106	55.415	-9.094	68.200	3.691	PK
5		5506.000	116.842	113.012	N/A	N/A	3.830	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:11
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

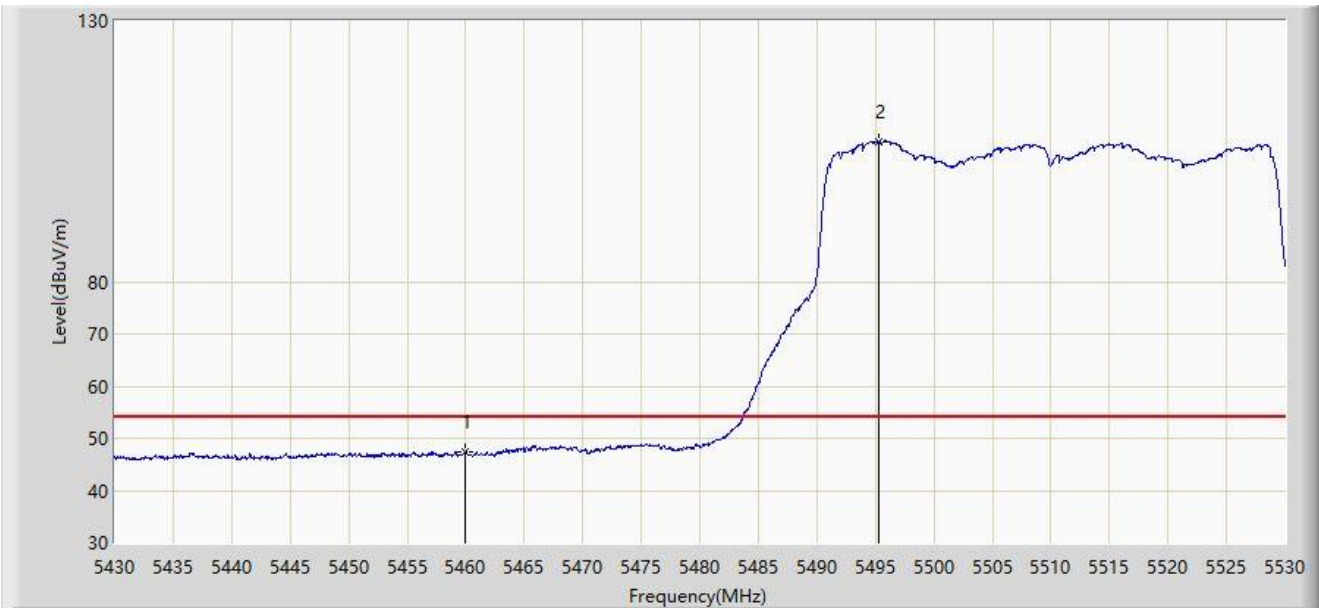


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	47.487	43.857	-6.513	54.000	3.630	AV
2		5495.250	106.901	102.970	N/A	N/A	3.931	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:21
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

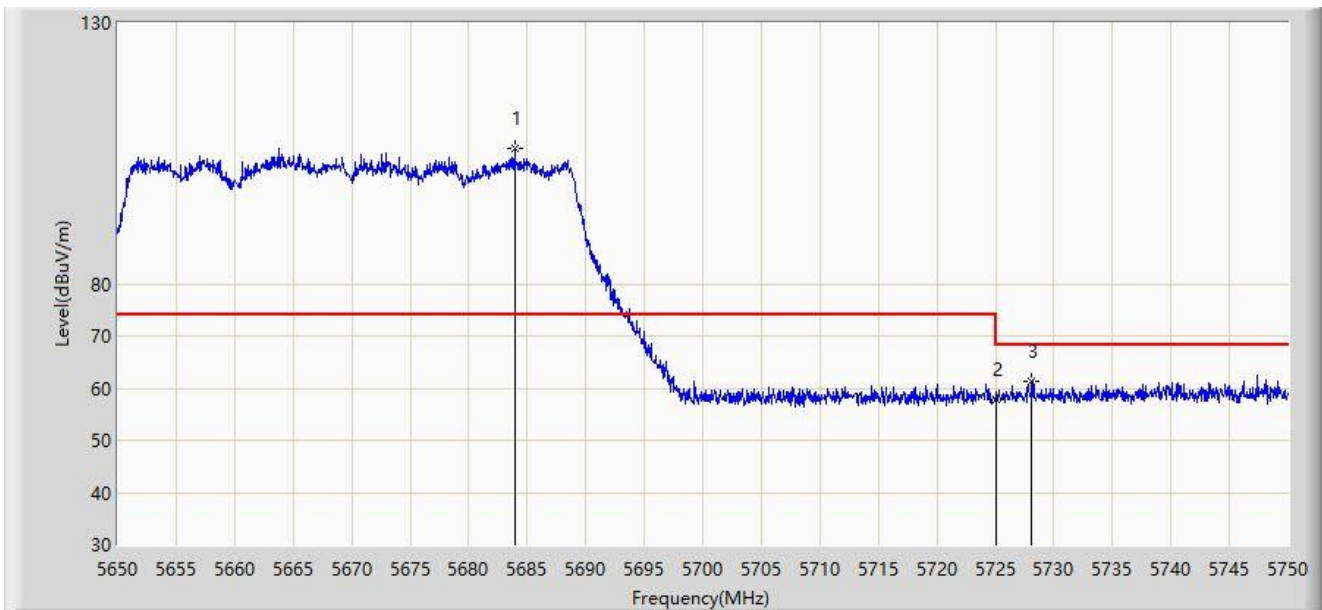


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5683.900	105.939	101.994	N/A	N/A	3.945	PK
2		5725.000	57.793	53.850	-10.407	68.200	3.943	PK
3	*	5728.100	61.442	57.471	-6.758	68.200	3.971	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:19
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

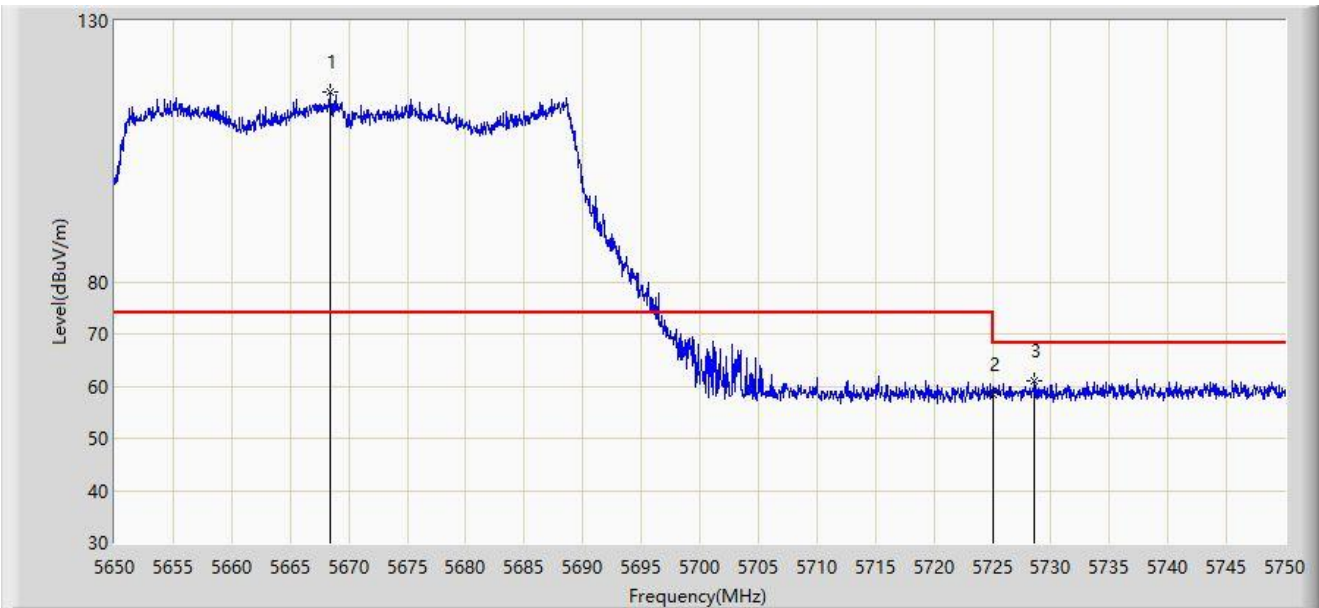


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.400	116.251	112.287	N/A	N/A	3.965	PK
2		5725.000	58.288	54.345	-9.912	68.200	3.943	PK
3	*	5728.600	60.972	56.994	-7.228	68.200	3.977	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:02
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

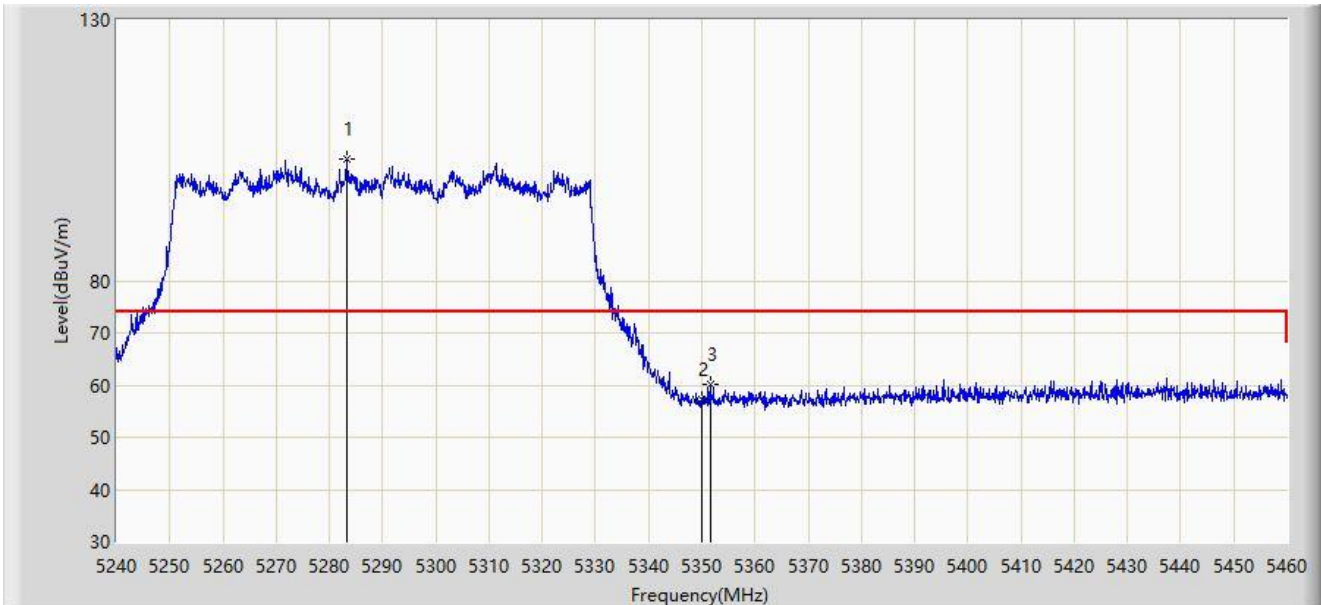


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5283.230	103.221	100.080	N/A	N/A	3.141	PK
2		5350.000	57.232	53.887	-16.768	74.000	3.344	PK
3	*	5351.540	60.267	56.948	-13.733	74.000	3.319	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:05
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

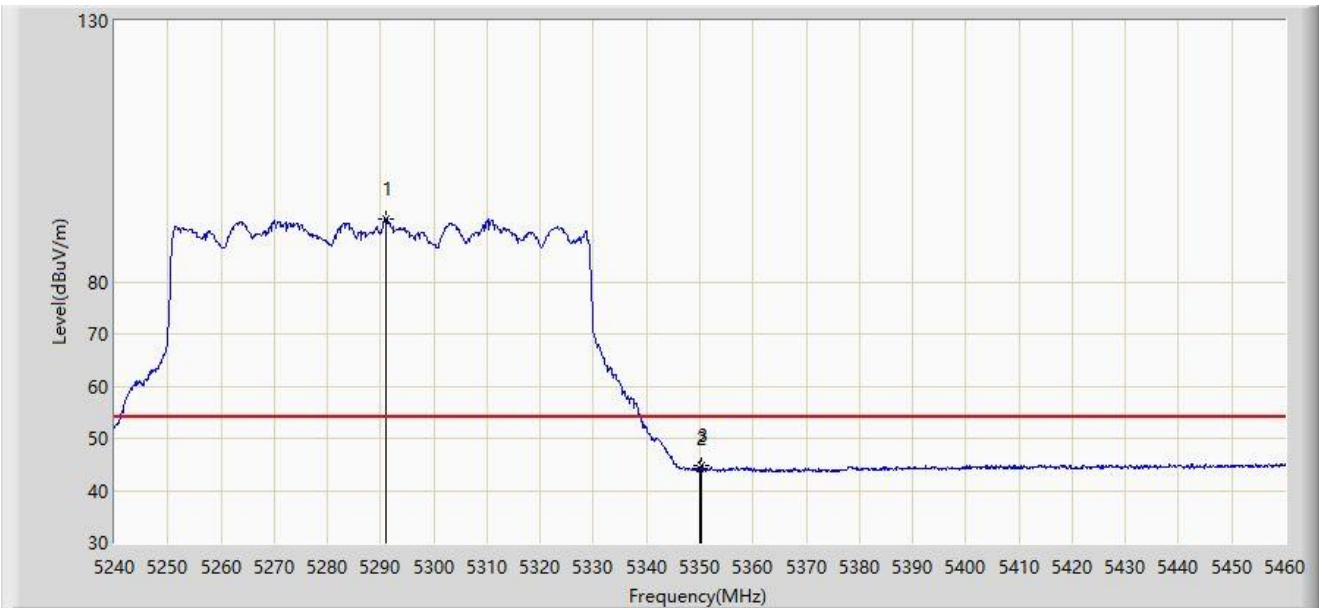


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5290.930	91.970	88.734	N/A	N/A	3.236	AV
2		5350.000	44.147	40.802	-9.853	54.000	3.344	AV
3	*	5350.220	44.735	41.394	-9.265	54.000	3.342	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:01
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

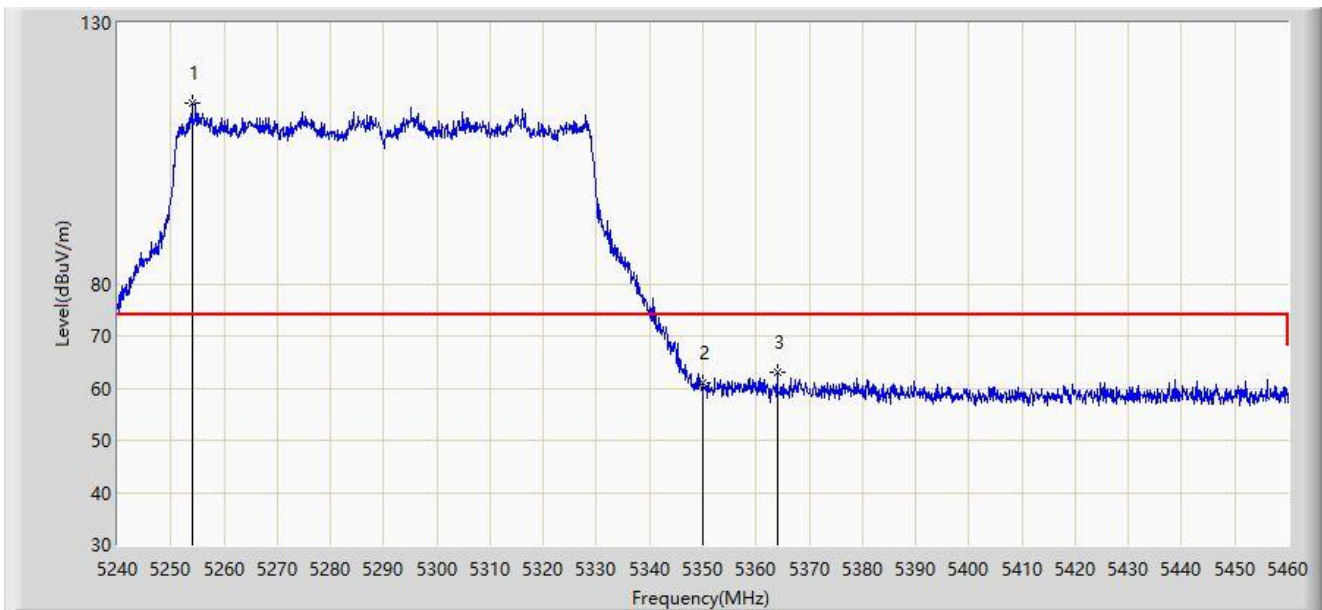


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5253.970	114.689	111.405	N/A	N/A	3.284	PK
2		5350.000	61.117	57.772	-12.883	74.000	3.344	PK
3	*	5363.970	63.097	59.821	-10.903	74.000	3.276	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 15:59
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

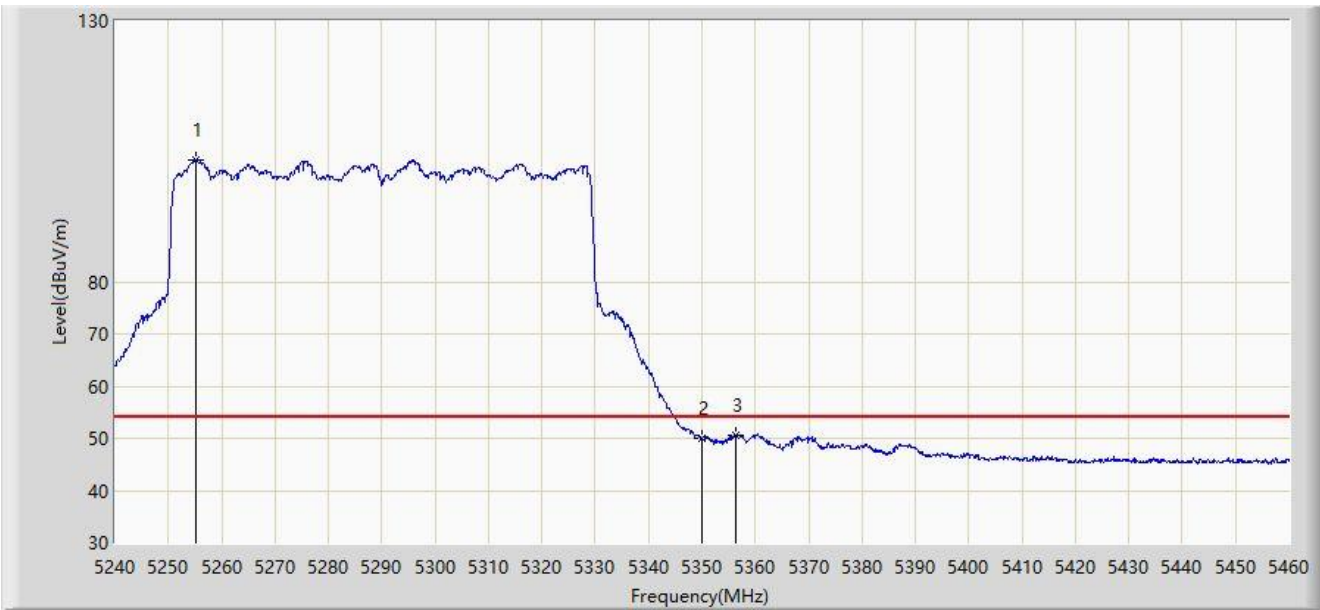


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5255.070	103.464	100.186	N/A	N/A	3.278	AV
2		5350.000	50.094	46.749	-3.906	54.000	3.344	AV
3	*	5356.270	50.681	47.382	-3.319	54.000	3.298	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:11
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

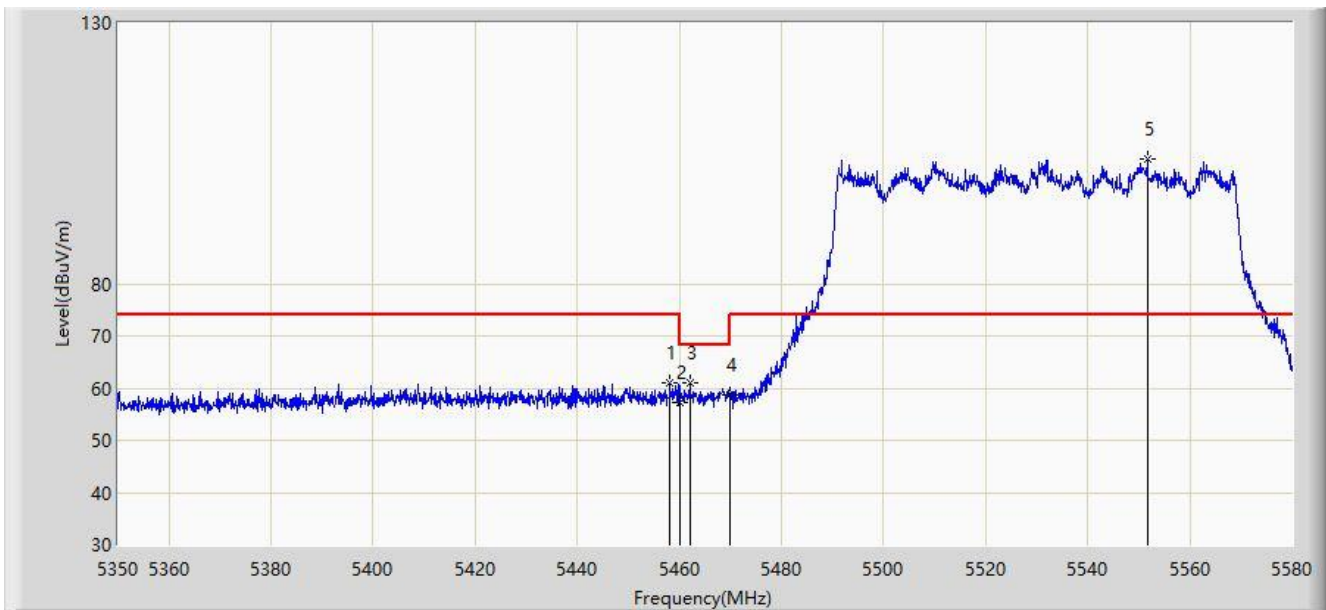


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5458.100	61.022	57.403	-12.978	74.000	3.619	PK
2		5460.000	57.127	53.497	-16.873	74.000	3.630	PK
3	*	5462.010	61.136	57.493	-7.064	68.200	3.643	PK
4		5470.000	58.712	55.021	-9.488	68.200	3.691	PK
5		5551.710	103.899	100.192	N/A	N/A	3.708	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:13
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

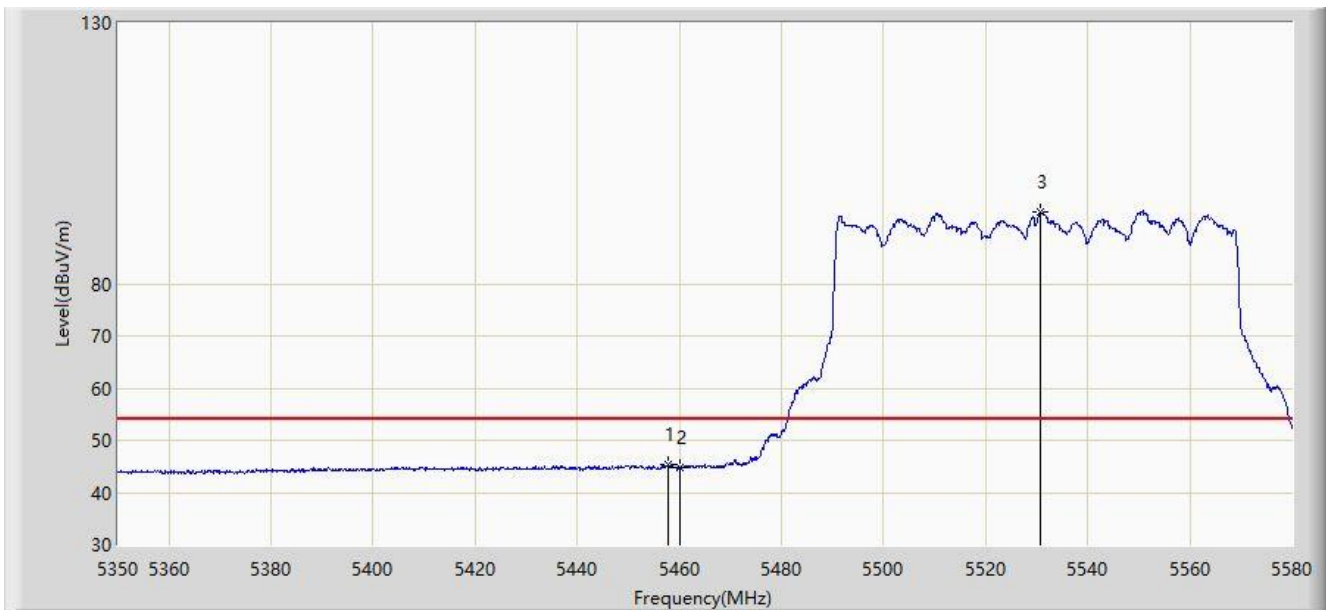


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.755	45.284	41.667	-8.716	54.000	3.616	AV
2		5460.000	44.712	41.082	-9.288	54.000	3.630	AV
3		5530.780	93.891	90.297	N/A	N/A	3.593	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:09
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

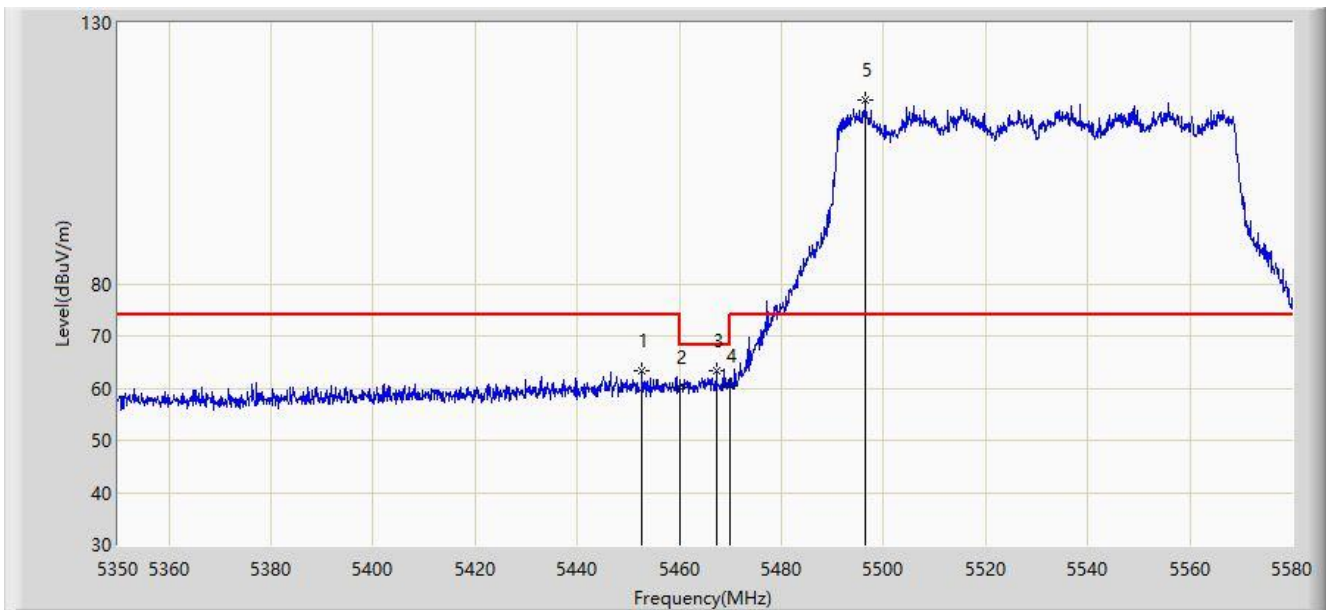


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5452.695	63.434	59.878	-10.566	74.000	3.557	PK
2		5460.000	60.195	56.565	-13.805	74.000	3.630	PK
3	*	5467.300	63.437	59.762	-4.763	68.200	3.675	PK
4		5470.000	60.333	56.642	-7.867	68.200	3.691	PK
5		5496.395	115.311	111.391	N/A	N/A	3.920	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:07
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

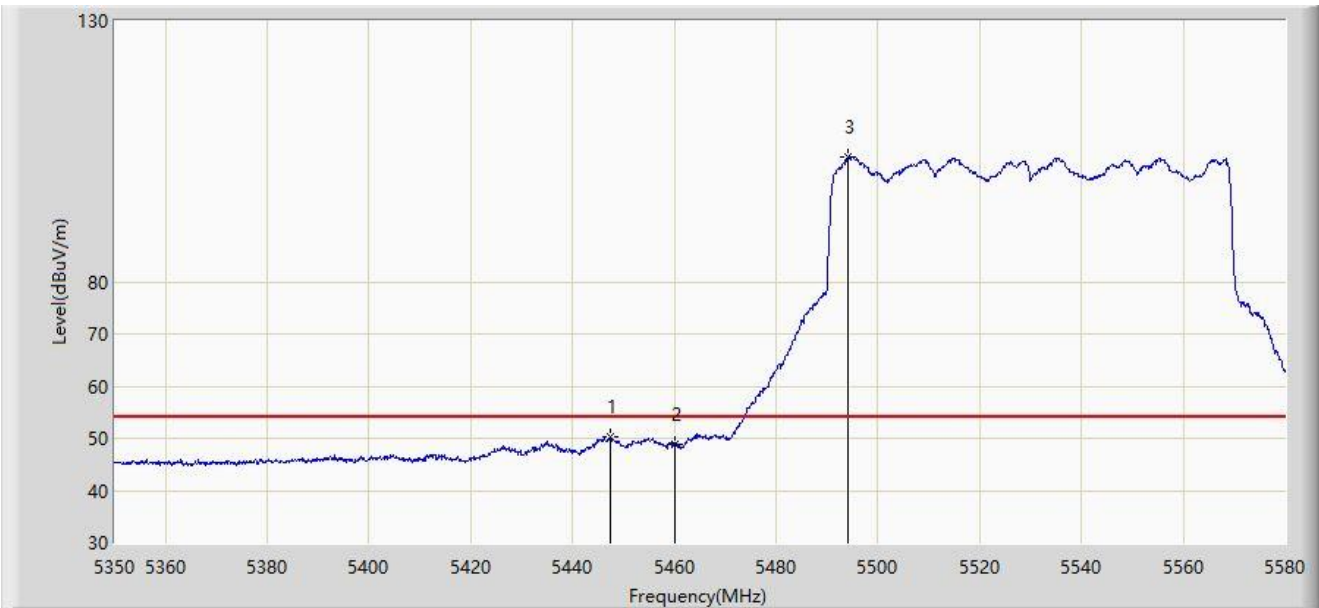


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5447.290	50.161	46.611	-3.839	54.000	3.550	AV
2		5460.000	48.776	45.146	-5.224	54.000	3.630	AV
3		5494.095	103.812	99.870	N/A	N/A	3.942	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:18
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

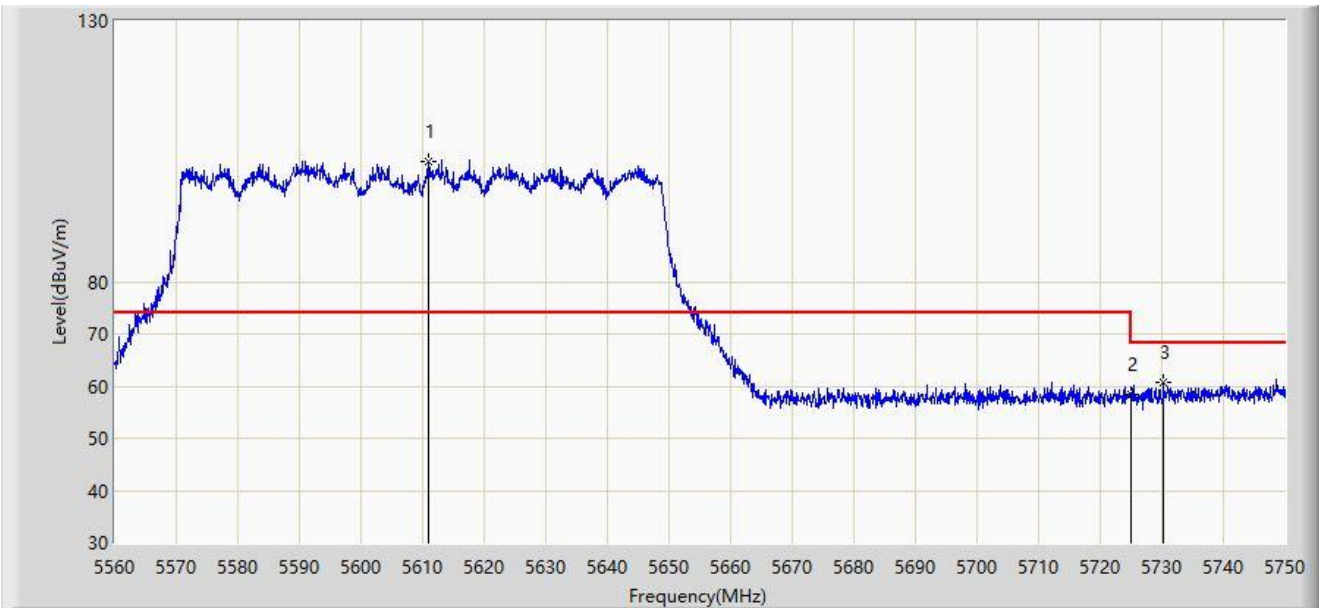


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5611.015	103.162	99.373	N/A	N/A	3.789	PK
2		5725.000	58.348	54.405	-9.852	68.200	3.943	PK
3	*	5730.335	60.690	56.690	-7.510	68.200	4.000	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:16
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

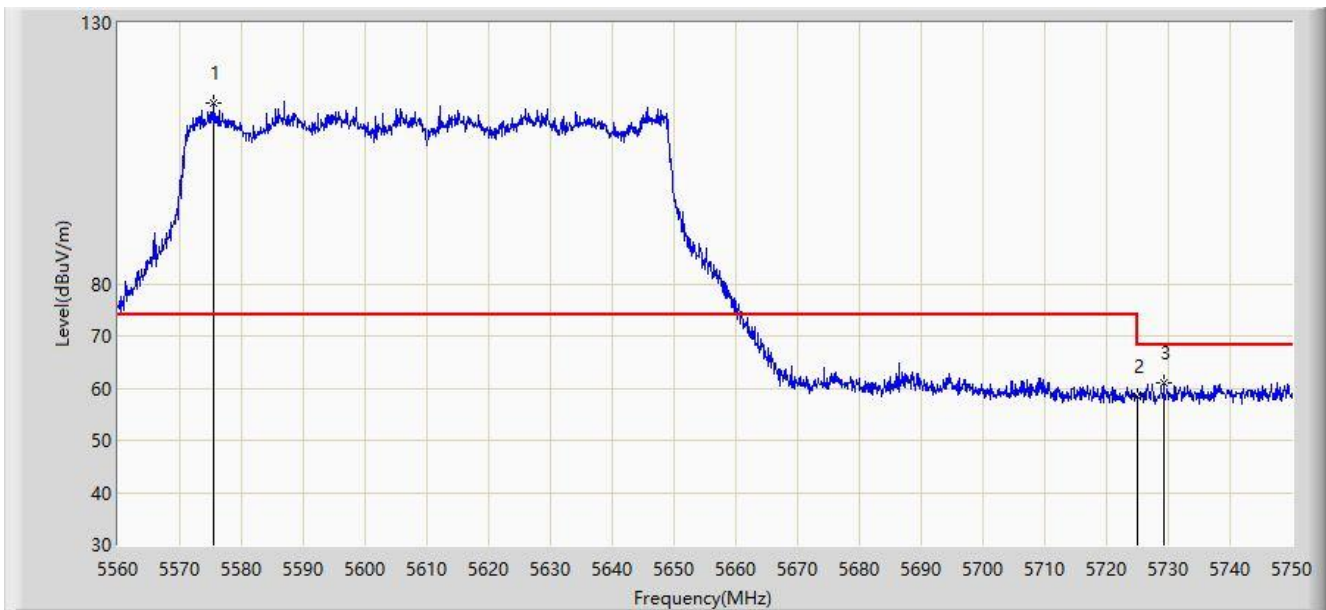


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5575.390	114.679	110.836	N/A	N/A	3.844	PK
2		5725.000	58.279	54.336	-9.921	68.200	3.943	PK
3	*	5729.290	61.074	57.088	-7.126	68.200	3.987	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:47
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

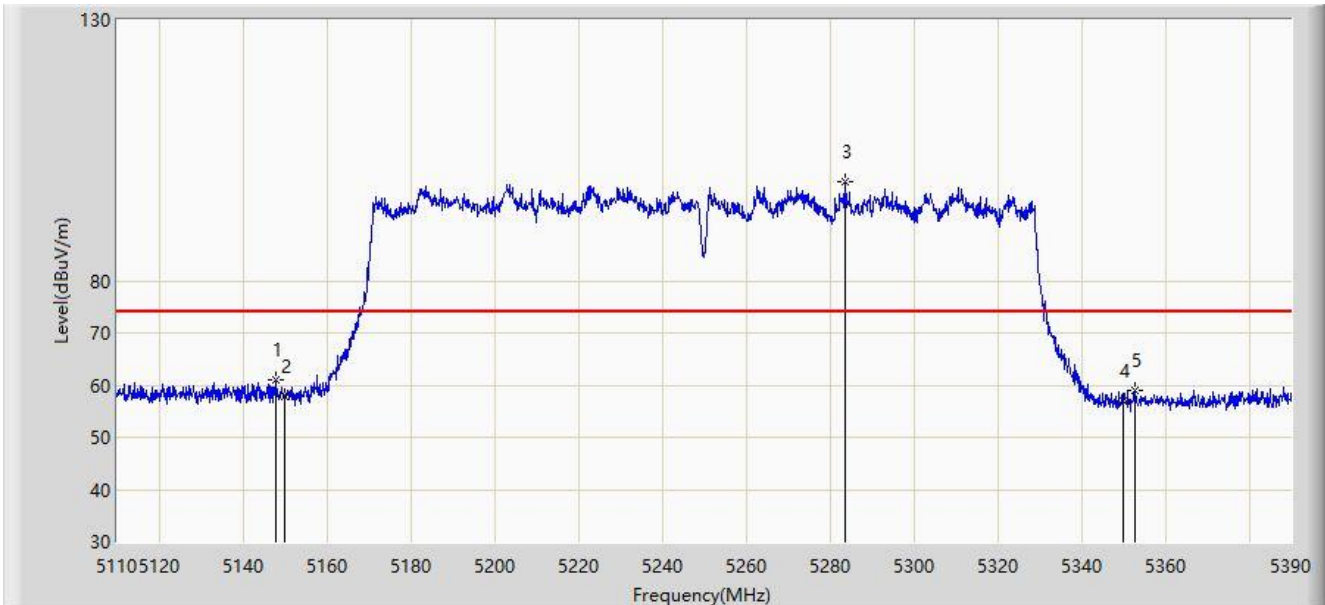


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.800	61.001	57.352	-12.999	74.000	3.649	PK
2		5150.000	57.942	54.301	-16.058	74.000	3.641	PK
3		5283.740	99.051	95.907	N/A	N/A	3.144	PK
4		5350.000	56.847	53.502	-17.153	74.000	3.344	PK
5		5352.760	58.955	55.646	-15.045	74.000	3.309	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:48
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

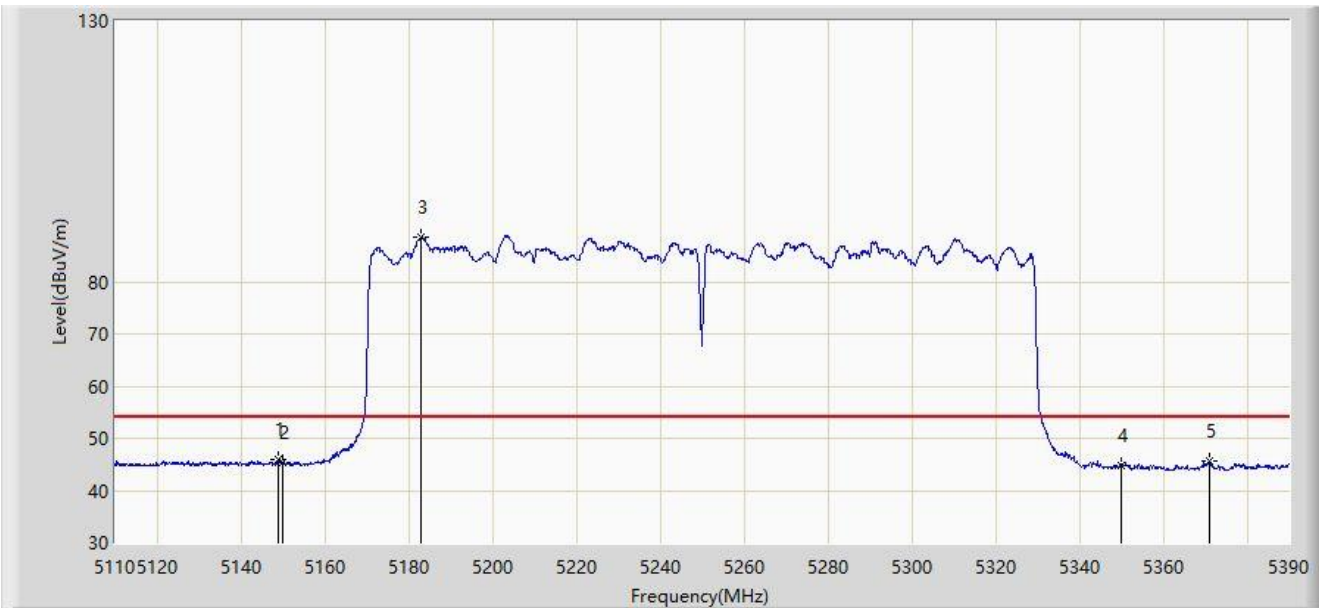


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.060	45.855	42.210	-8.145	54.000	3.645	AV
2		5150.000	45.227	41.586	-8.773	54.000	3.641	AV
3		5183.080	88.554	85.218	N/A	N/A	3.336	AV
4		5350.000	44.906	41.561	-9.094	54.000	3.344	AV
5		5370.960	45.674	42.352	-8.326	54.000	3.322	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:45
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

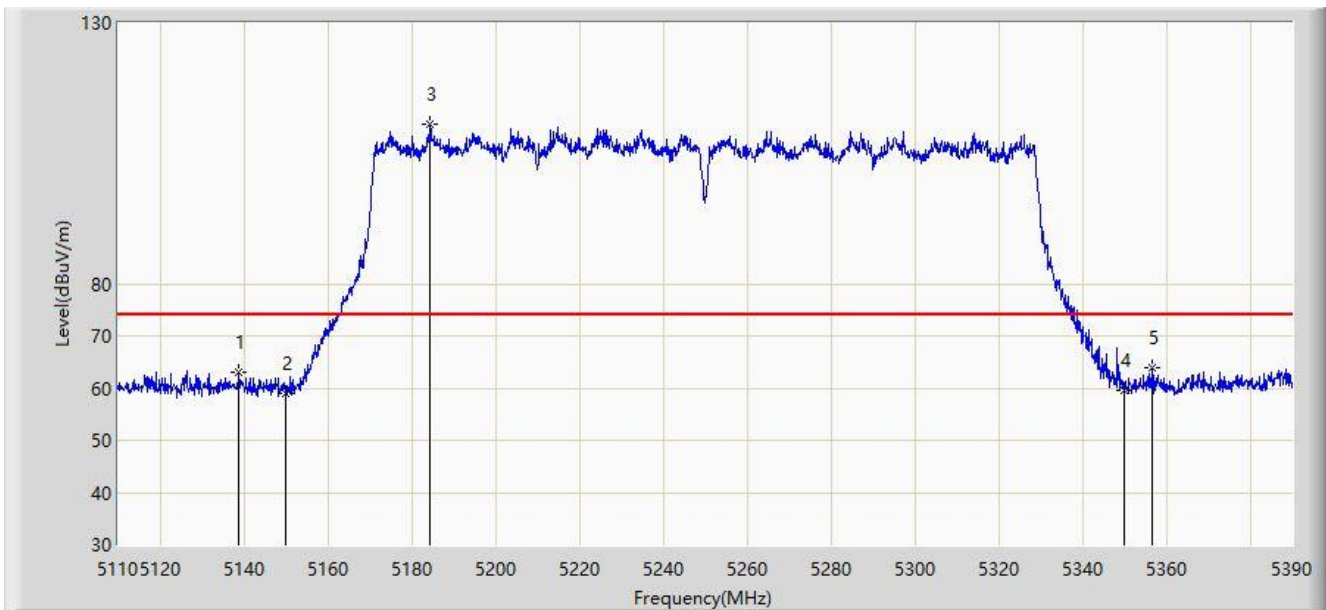


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5138.840	63.126	59.504	-10.874	74.000	3.622	PK
2		5150.000	59.092	55.451	-14.908	74.000	3.641	PK
3		5184.480	110.687	107.344	N/A	N/A	3.343	PK
4		5350.000	59.698	56.353	-14.302	74.000	3.344	PK
5	*	5356.540	63.933	60.635	-10.067	74.000	3.298	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 16:43
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

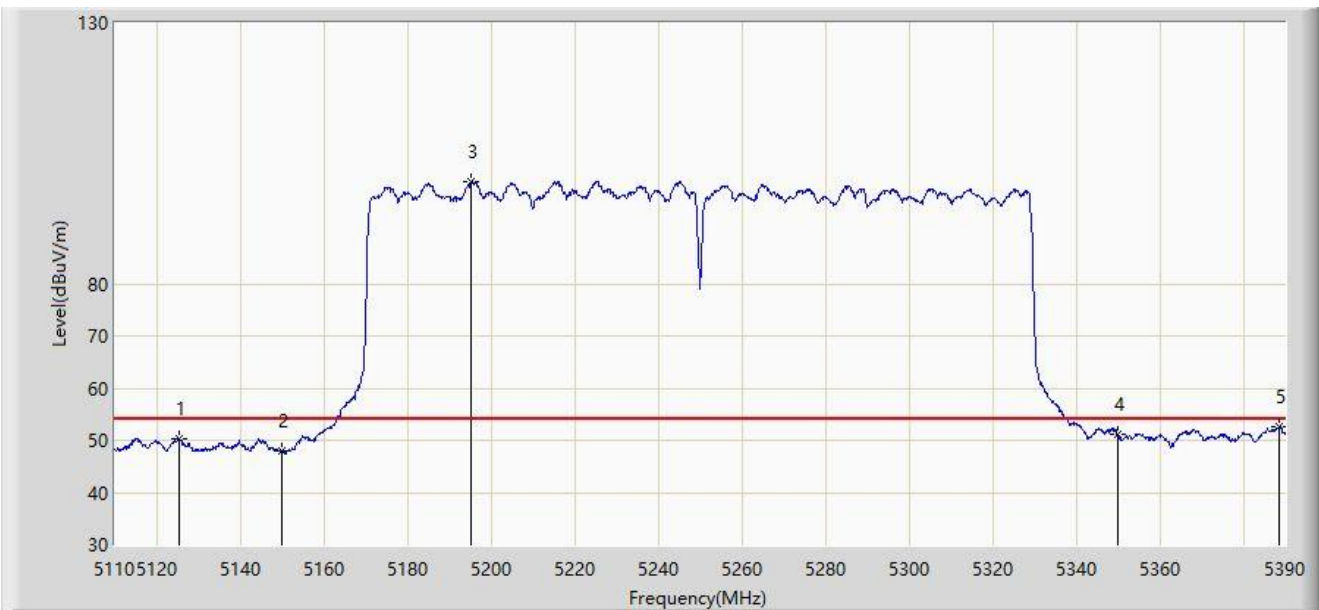


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5125.540	50.403	46.890	-3.597	54.000	3.513	AV
2		5150.000	47.983	44.342	-6.017	54.000	3.641	AV
3		5195.260	99.453	96.145	N/A	N/A	3.308	AV
4		5350.000	51.063	47.718	-2.937	54.000	3.344	AV
5	*	5388.740	52.471	48.844	-1.529	54.000	3.627	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 17:05
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

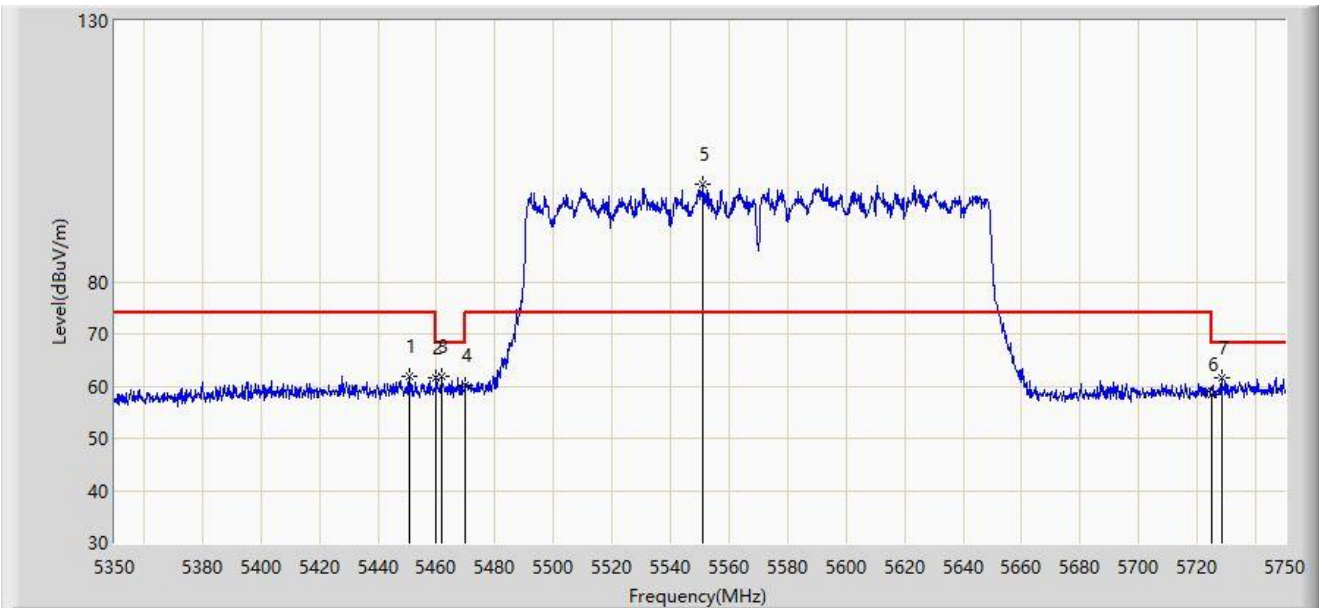


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5451.000	61.996	58.442	-12.004	74.000	3.555	PK
2		5460.000	61.691	58.061	-12.309	74.000	3.630	PK
3	*	5461.600	61.860	58.220	-6.340	68.200	3.640	PK
4		5470.000	60.219	56.528	-7.981	68.200	3.691	PK
5		5551.000	98.813	95.107	N/A	N/A	3.707	PK
6		5725.000	58.374	54.431	-9.826	68.200	3.943	PK
7		5728.200	61.591	57.618	-6.609	68.200	3.972	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 17:10
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

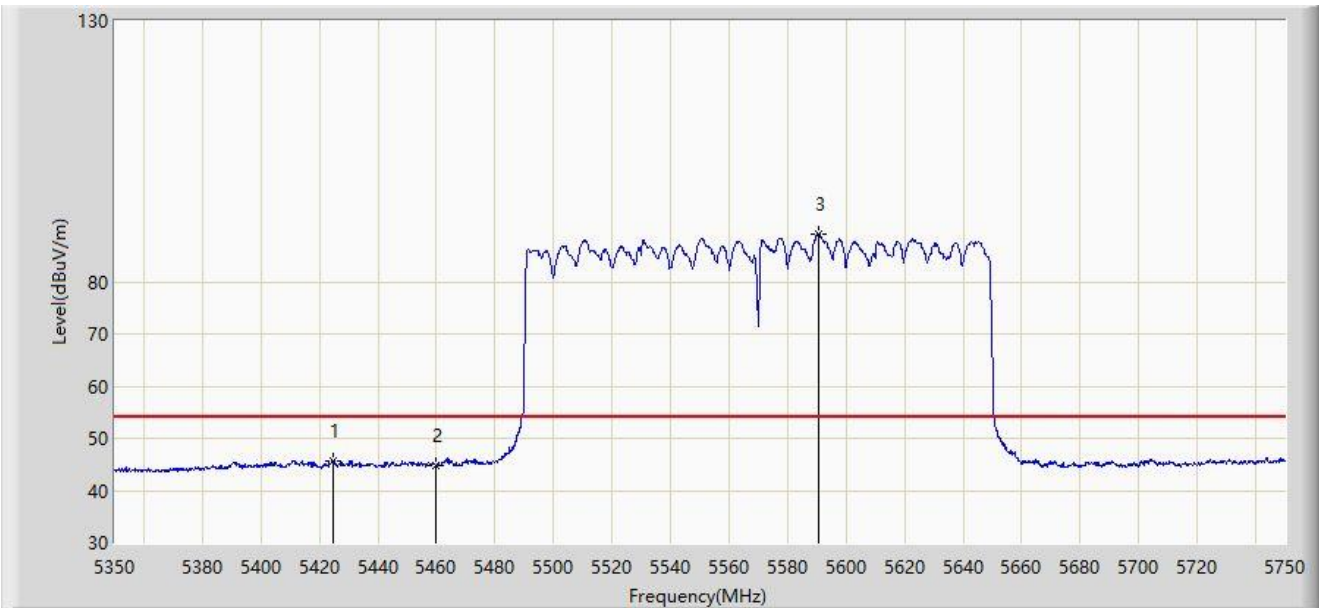


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5424.800	45.701	42.125	-8.299	54.000	3.576	AV
2		5460.000	44.823	41.193	-9.177	54.000	3.630	AV
3		5590.600	89.167	85.282	N/A	N/A	3.885	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 17:04
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

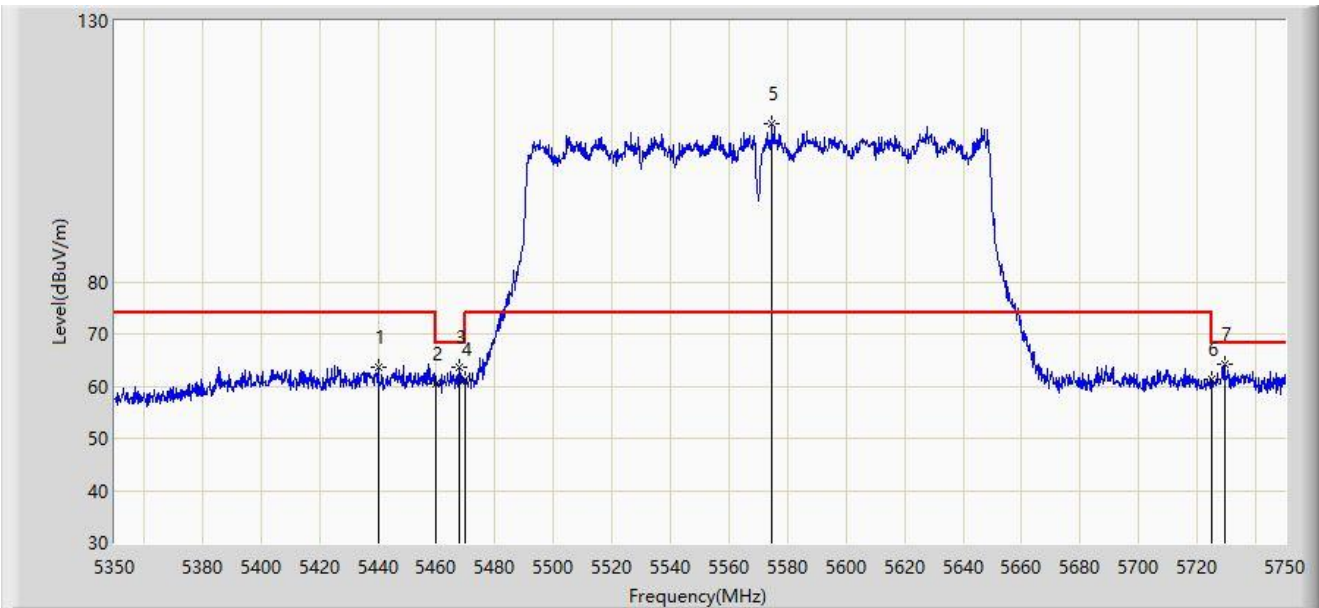


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5440.000	63.723	60.181	-10.277	74.000	3.542	PK
2		5460.000	60.556	56.926	-13.444	74.000	3.630	PK
3		5468.000	63.508	59.829	-4.692	68.200	3.679	PK
4		5470.000	61.181	57.490	-7.019	68.200	3.691	PK
5		5574.800	110.376	106.532	N/A	N/A	3.844	PK
6		5725.000	61.324	57.381	-6.876	68.200	3.943	PK
7	*	5729.200	64.159	60.174	-4.041	68.200	3.986	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/15 - 17:01
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

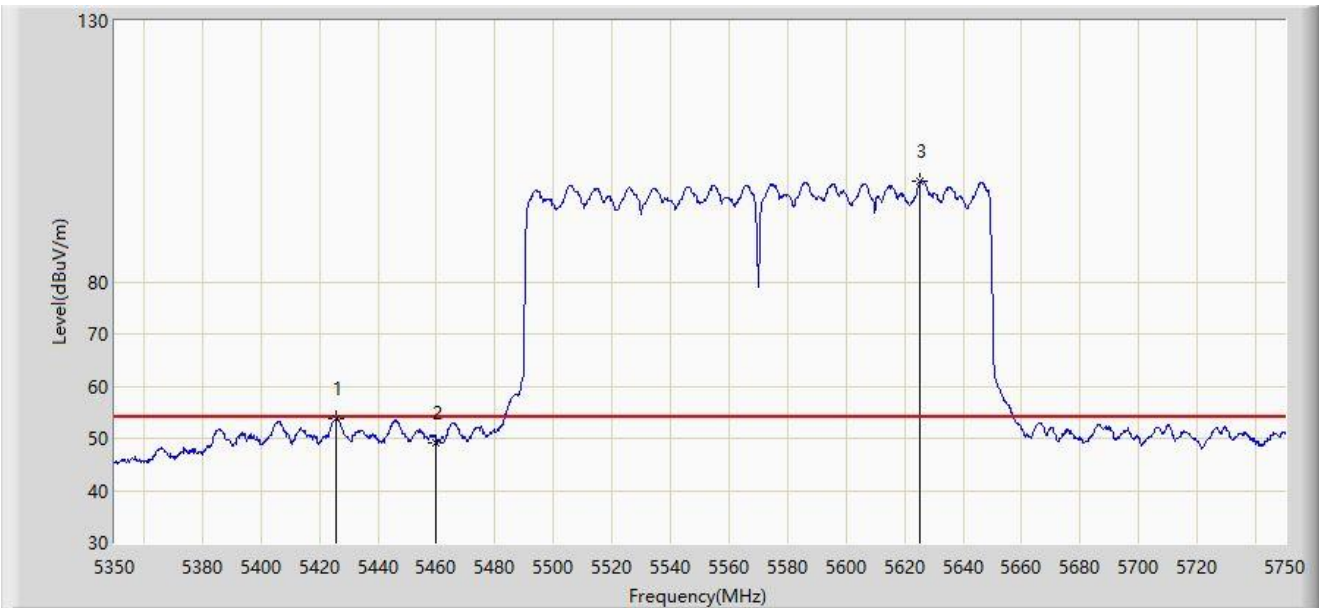


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5425.600	53.810	50.236	-0.190	54.000	3.574	AV
2		5460.000	49.214	45.584	-4.786	54.000	3.630	AV
3		5625.400	99.154	95.471	N/A	N/A	3.683	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 19:48
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5320MHz	

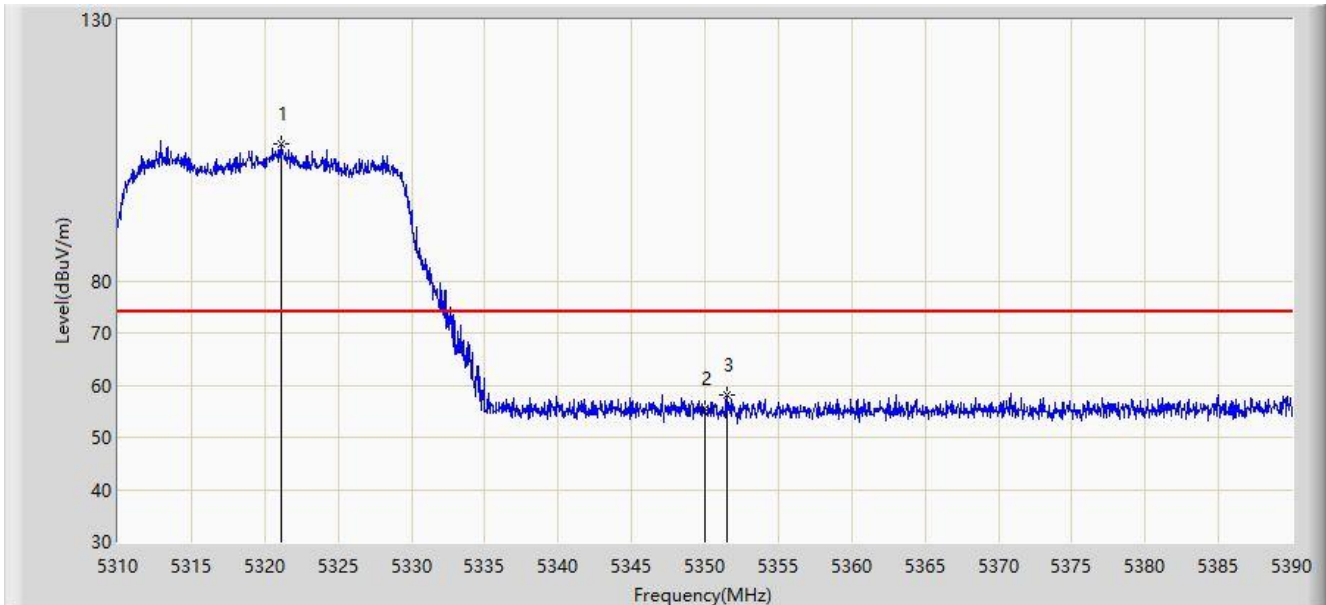


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.160	106.195	102.792	N/A	N/A	3.403	PK
2		5350.000	55.549	52.204	-18.451	74.000	3.344	PK
3	*	5351.520	58.193	54.874	-15.807	74.000	3.319	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 19:51
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5320MHz	

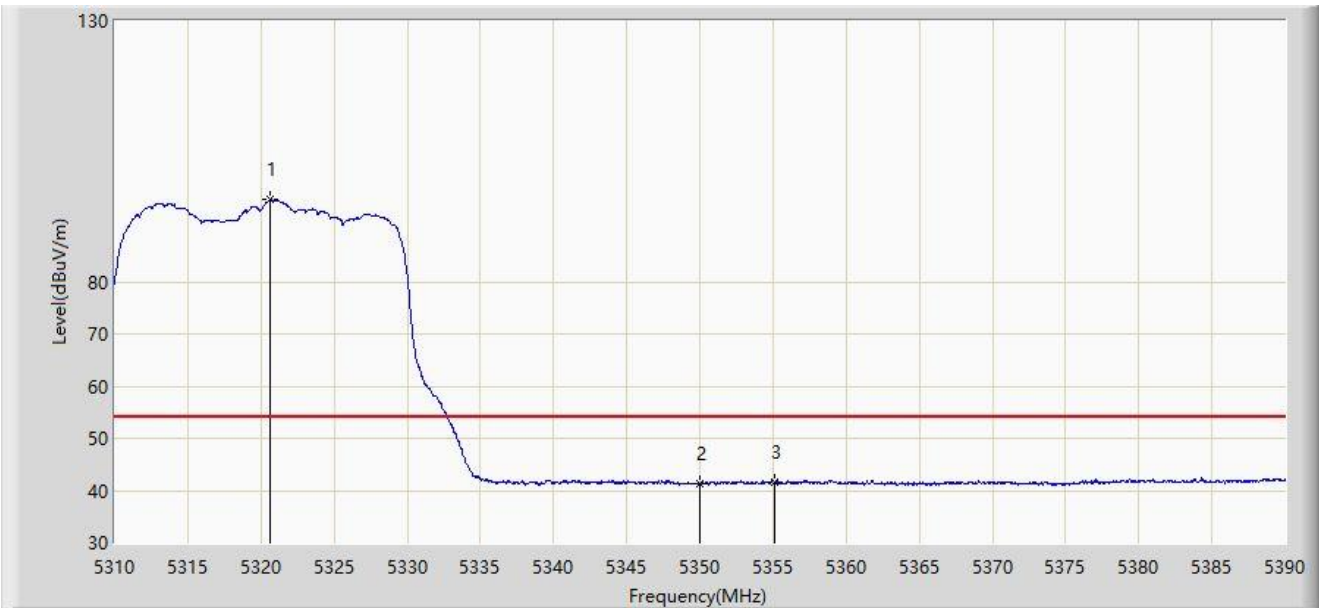


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.640	95.658	92.256	N/A	N/A	3.403	AV
2		5350.000	41.372	38.027	-12.628	54.000	3.344	AV
3	*	5355.120	41.647	38.345	-12.353	54.000	3.302	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 19:53
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5320MHz	

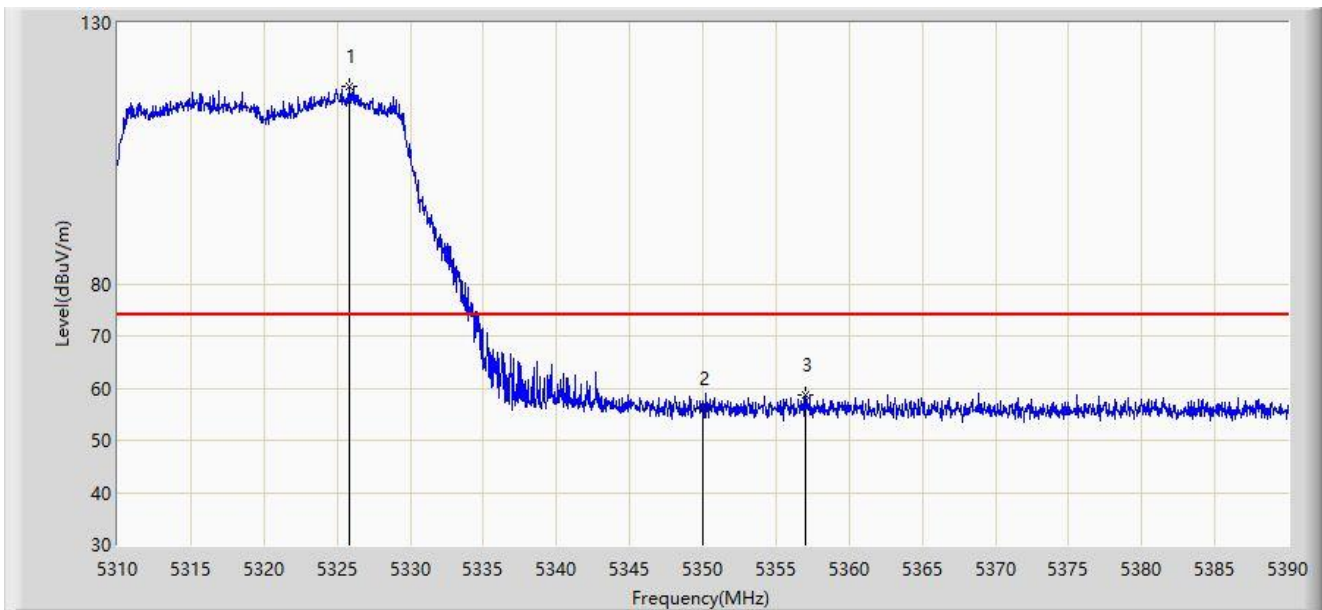


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5325.880	117.922	114.514	N/A	N/A	3.409	PK
2		5350.000	56.021	52.676	-17.979	74.000	3.344	PK
3	*	5357.000	58.570	55.274	-15.430	74.000	3.296	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 19:54
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5320MHz	

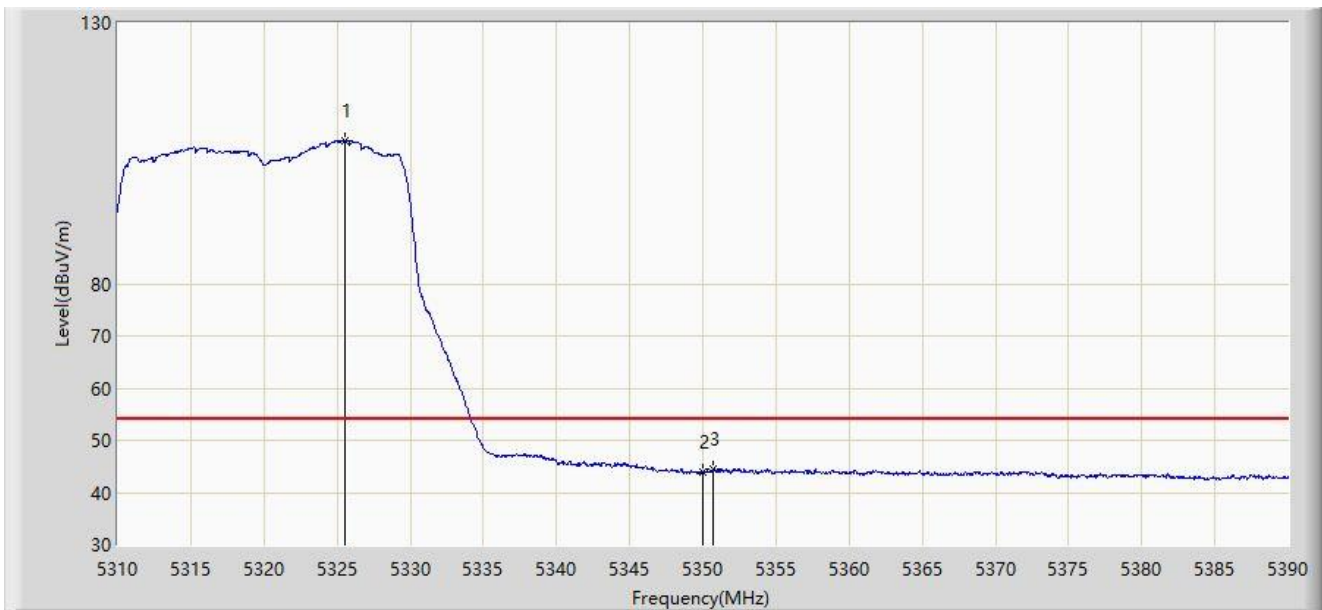


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.520	107.386	103.978	N/A	N/A	3.409	AV
2		5350.000	43.938	40.593	-10.062	54.000	3.344	AV
3	*	5350.720	44.587	41.254	-9.413	54.000	3.333	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:02
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5500MHz	

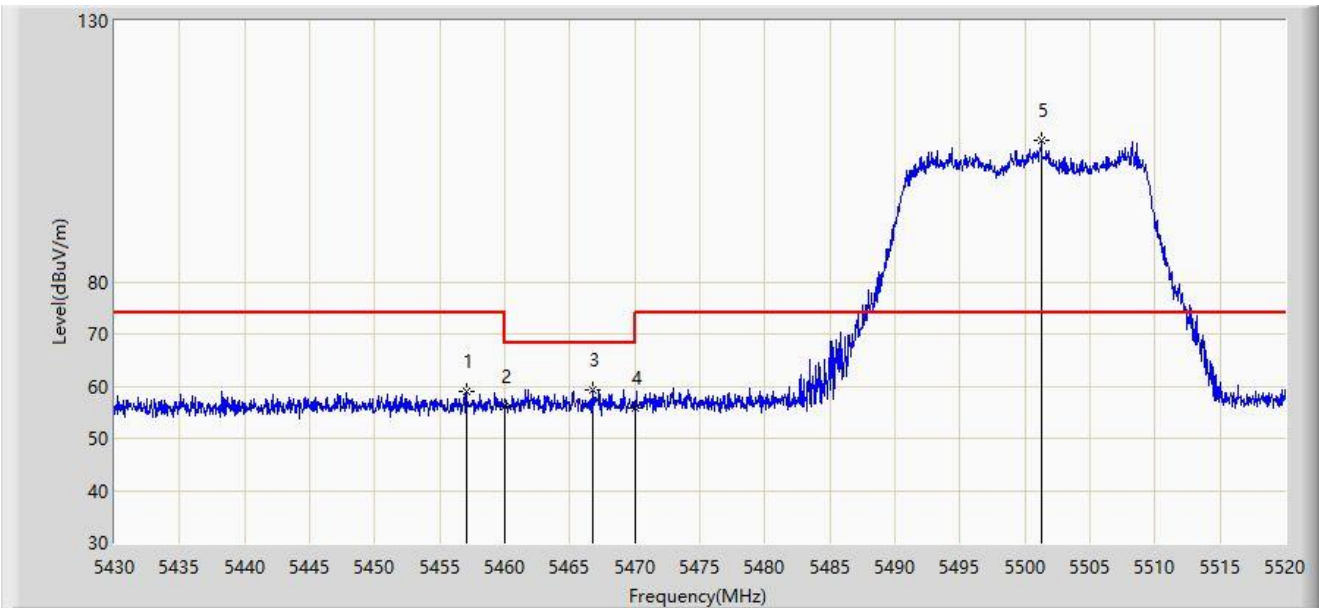


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5457.045	58.860	55.248	-15.140	74.000	3.612	PK
2		5460.000	56.172	52.542	-17.828	74.000	3.630	PK
3	*	5466.765	59.405	55.734	-8.795	68.200	3.672	PK
4		5470.000	55.863	52.172	-12.337	68.200	3.691	PK
5		5501.280	107.130	103.256	N/A	N/A	3.873	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:03
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5500MHz	

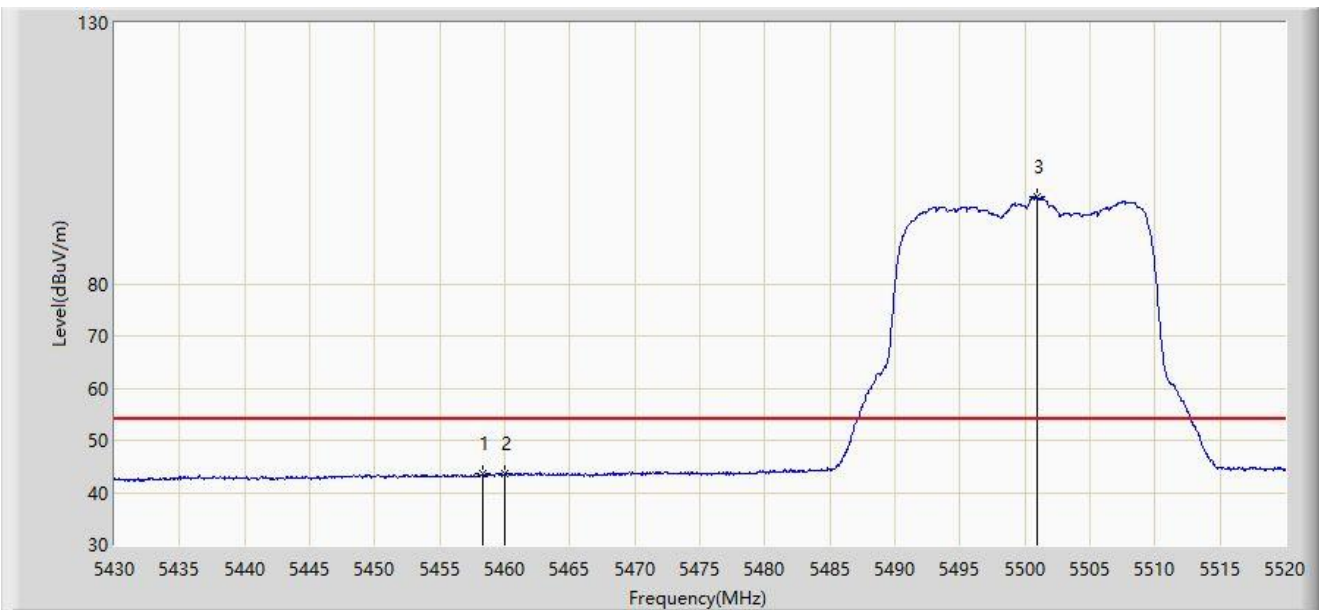


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5458.260	43.679	40.059	-10.321	54.000	3.620	AV
2		5460.000	43.610	39.980	-10.390	54.000	3.630	AV
3		5500.920	96.697	92.819	N/A	N/A	3.878	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 19:56
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5500MHz	

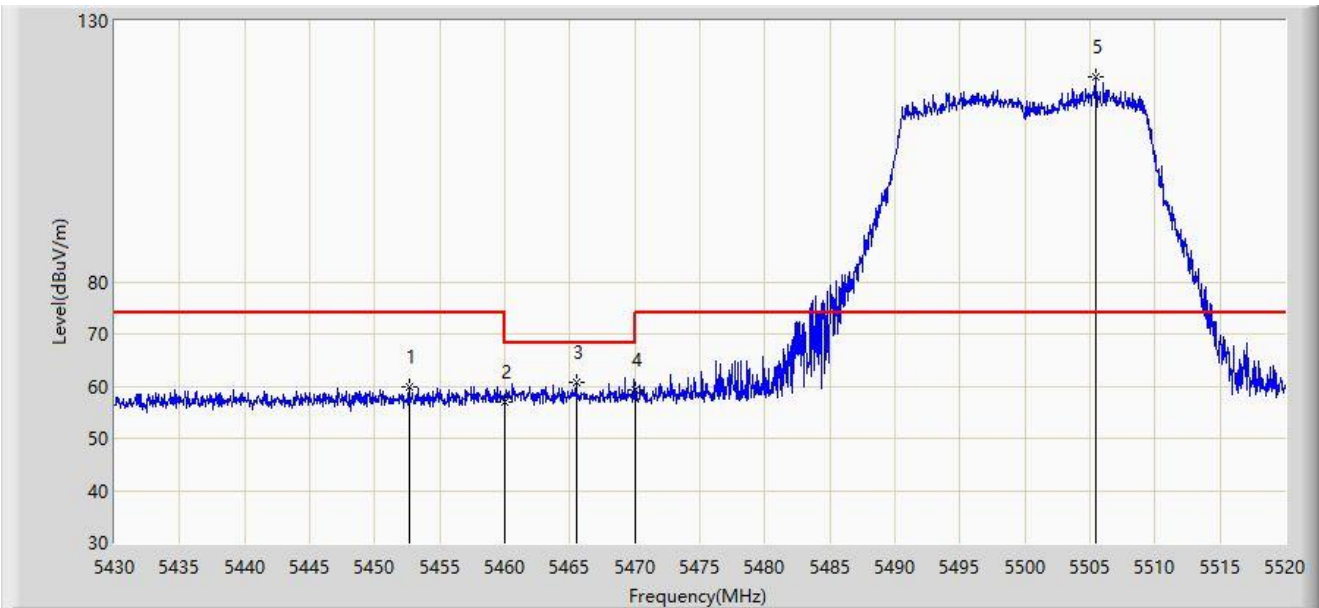


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5452.680	59.989	56.433	-14.011	74.000	3.557	PK
2		5460.000	57.095	53.465	-16.905	74.000	3.630	PK
3	*	5465.505	60.786	57.122	-7.414	68.200	3.664	PK
4		5470.000	59.364	55.673	-8.836	68.200	3.691	PK
5		5505.420	119.184	115.349	N/A	N/A	3.835	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:00
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5500MHz	

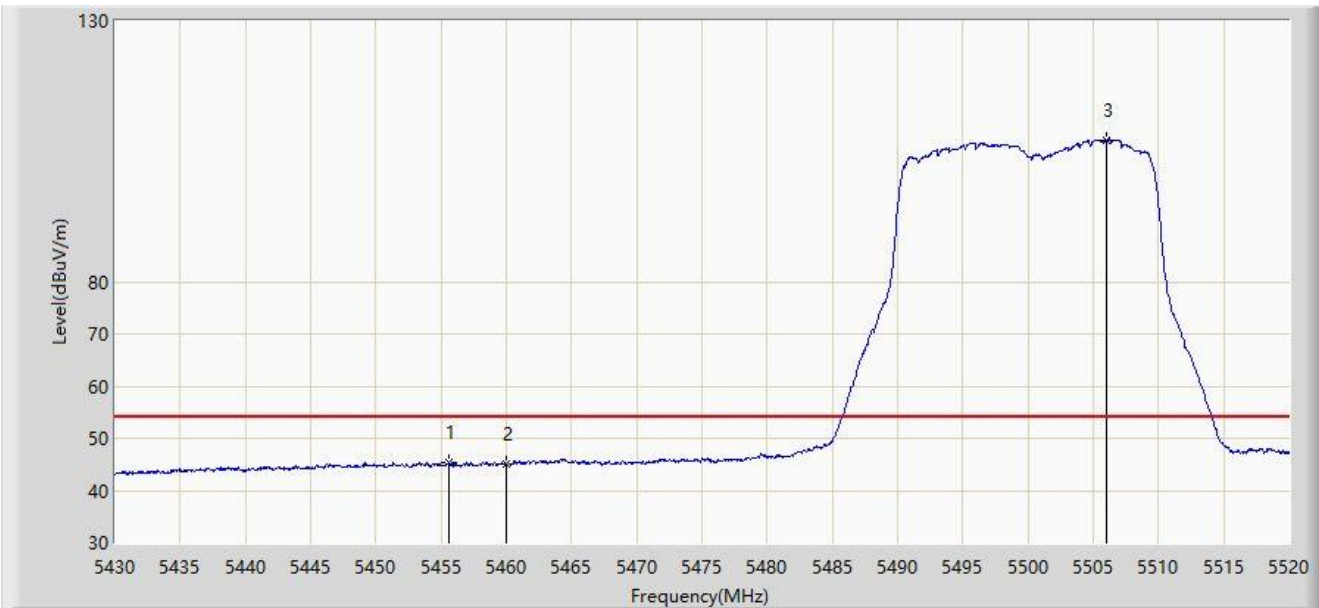


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5455.650	45.345	41.757	-8.655	54.000	3.589	AV
2		5460.000	45.140	41.510	-8.860	54.000	3.630	AV
3		5505.960	107.224	103.394	N/A	N/A	3.831	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:06
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5700MHz	

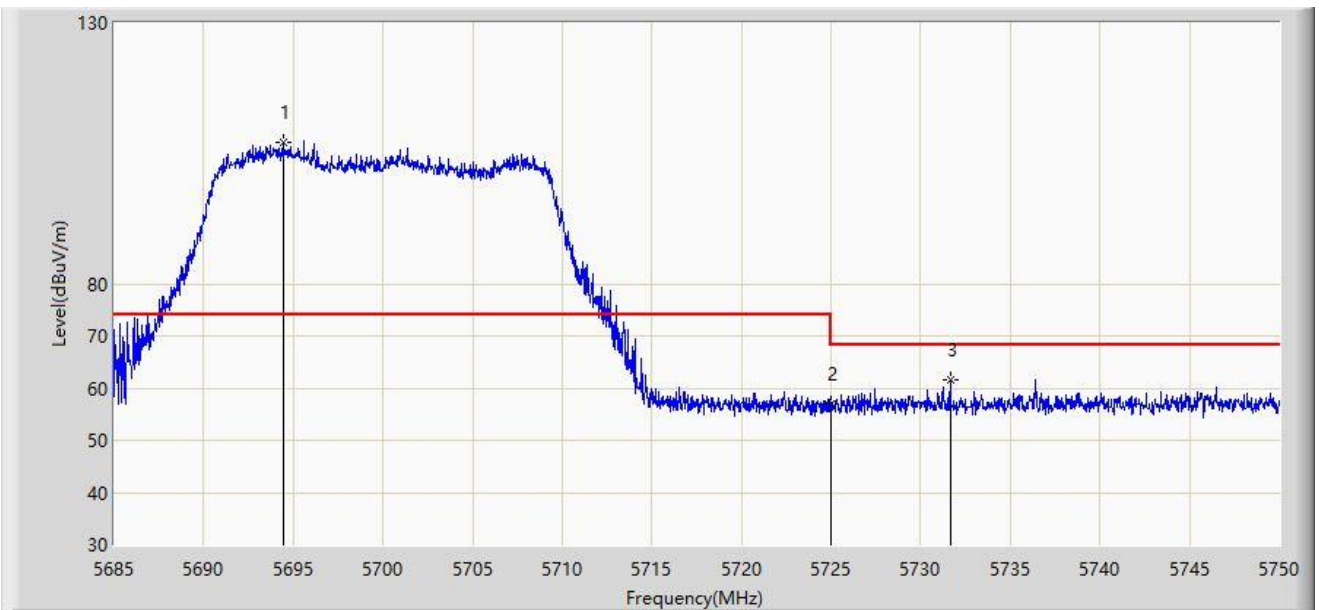


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5694.458	107.174	103.249	N/A	N/A	3.925	PK
2		5725.000	56.911	52.968	-11.289	68.200	3.943	PK
3	*	5731.638	61.648	57.632	-6.552	68.200	4.016	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:08
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT20 at 5700MHz	

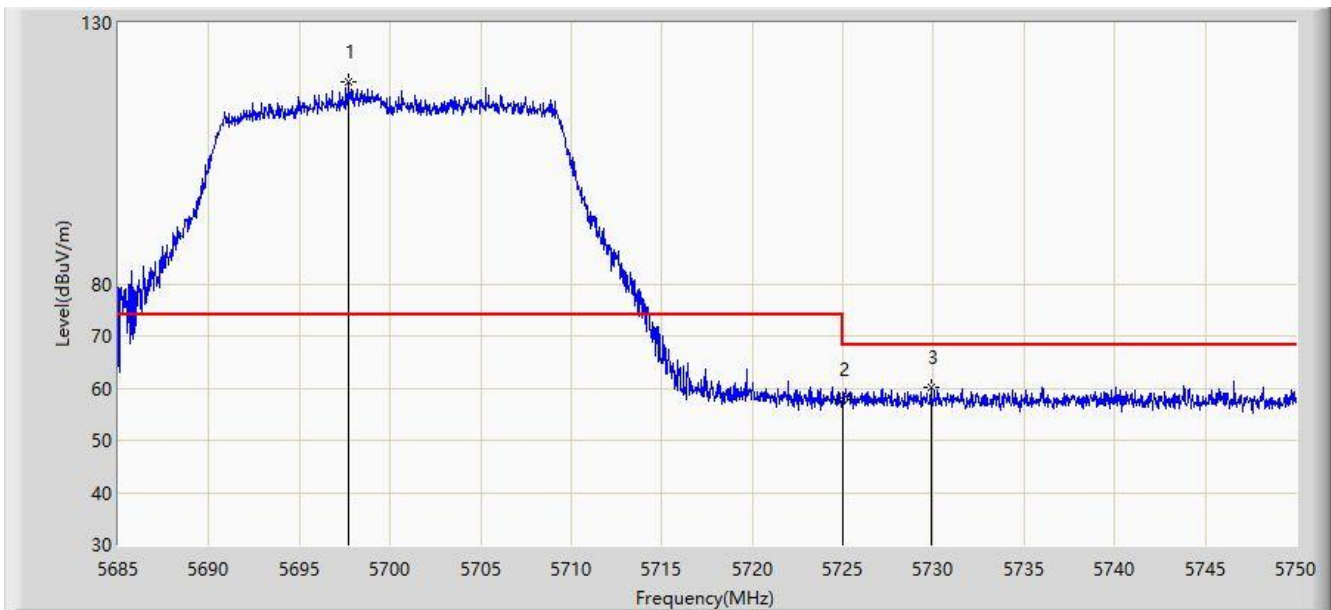


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5697.675	118.586	114.667	N/A	N/A	3.920	PK
2		5725.000	57.853	53.910	-10.347	68.200	3.943	PK
3	*	5729.882	60.157	56.163	-8.043	68.200	3.993	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:52
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT40 at 5310MHz	

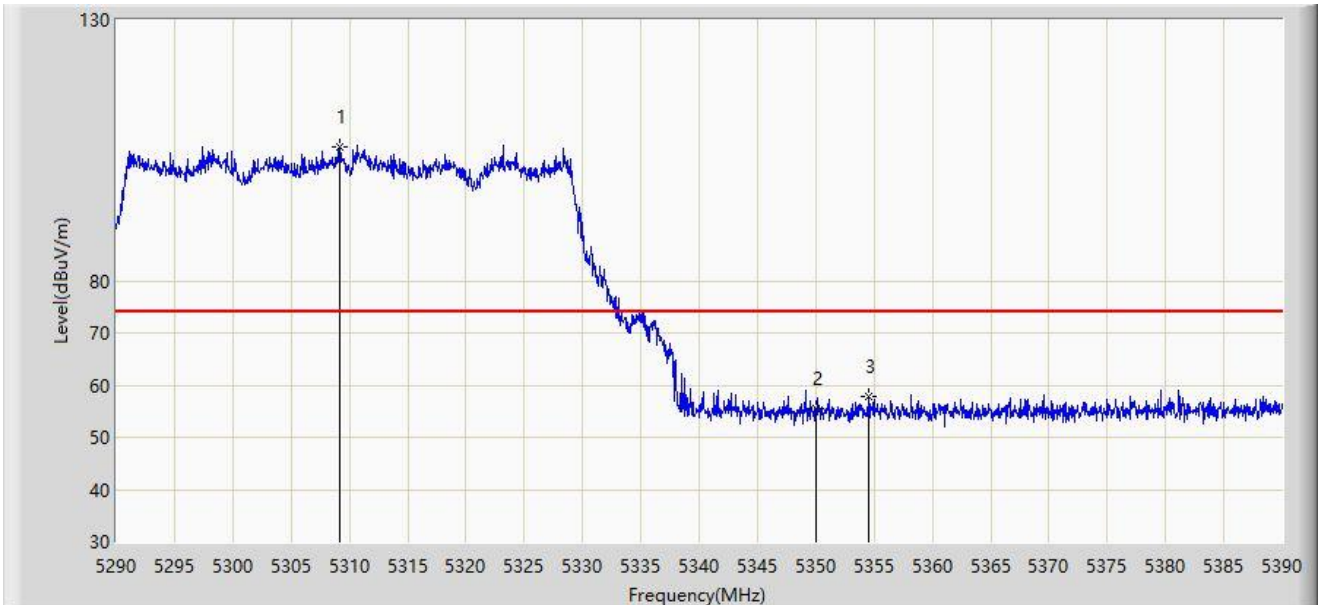


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5309.150	105.659	102.336	N/A	N/A	3.324	PK
2		5350.000	55.594	52.249	-18.406	74.000	3.344	PK
3	*	5354.500	57.758	54.454	-16.242	74.000	3.303	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:56
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT40 at 5310MHz	

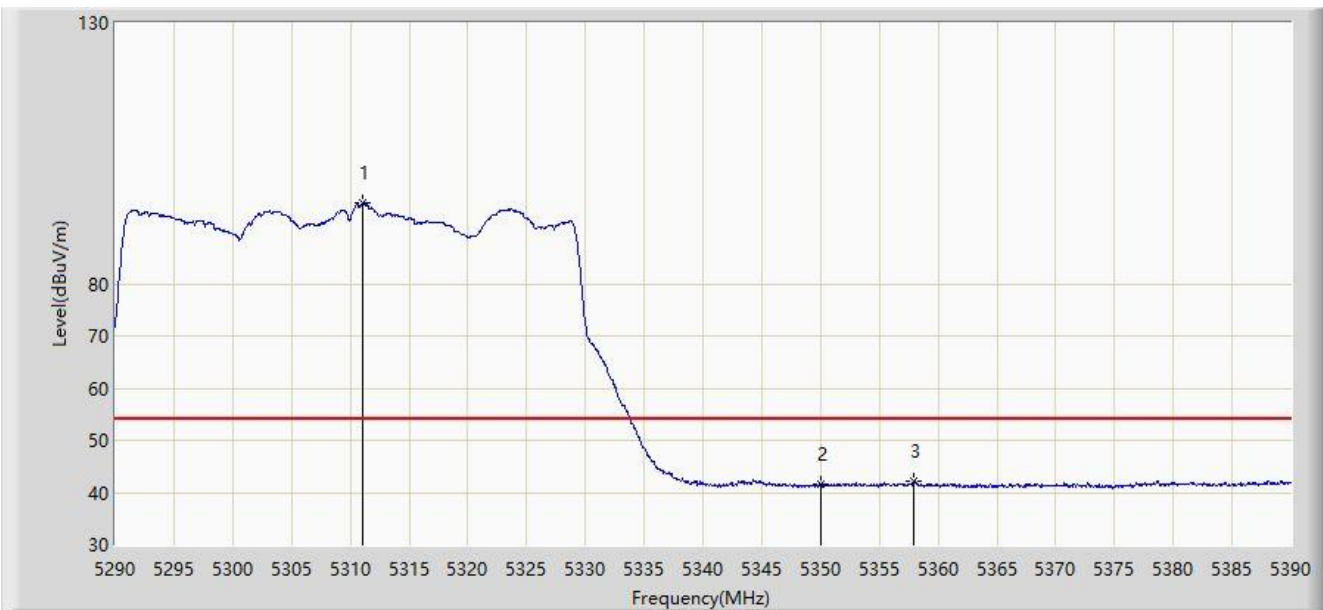


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.100	95.422	92.091	N/A	N/A	3.331	AV
2		5350.000	41.629	38.284	-12.371	54.000	3.344	AV
3	*	5357.950	42.317	39.023	-11.683	54.000	3.294	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:58
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT40 at 5310MHz	

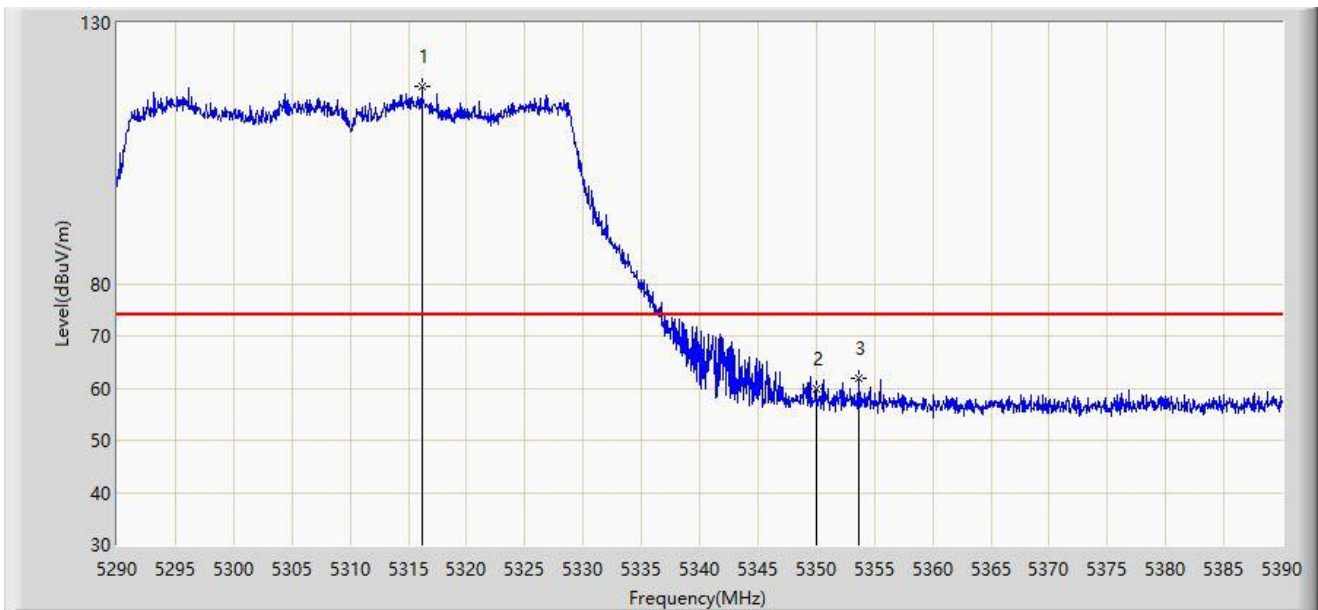


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5316.200	117.741	114.364	N/A	N/A	3.377	PK
2		5350.000	59.991	56.646	-14.009	74.000	3.344	PK
3	*	5353.600	61.792	58.486	-12.208	74.000	3.306	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 20:59
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT40 at 5310MHz	

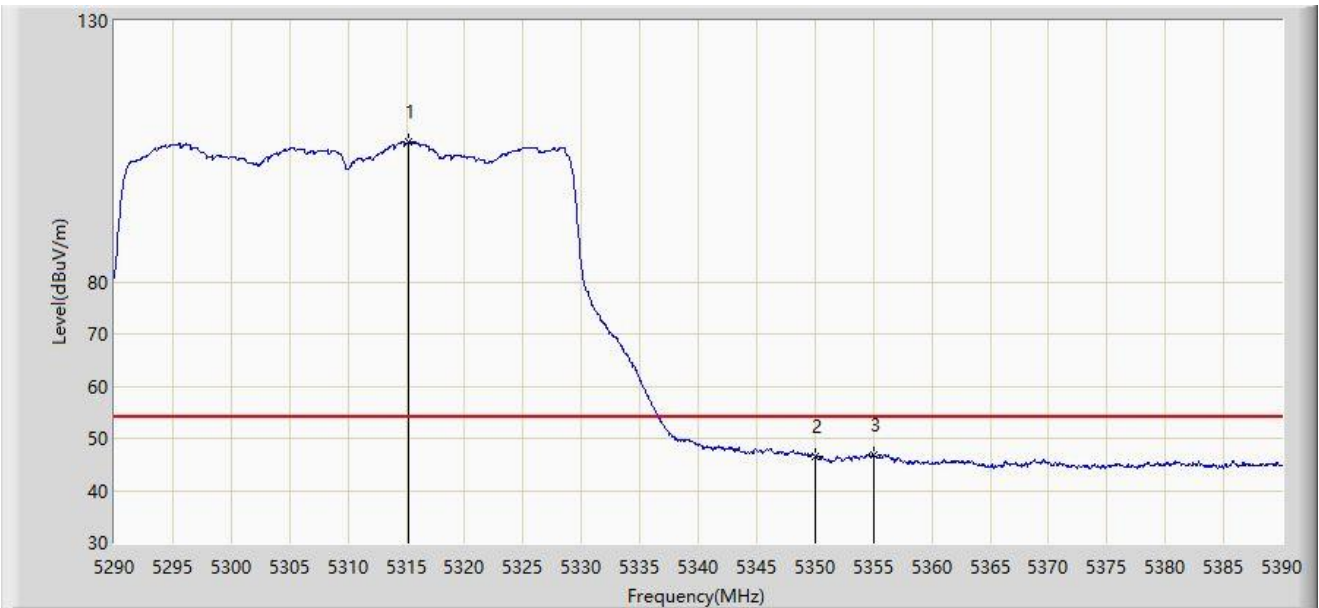


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5315.150	106.711	103.348	N/A	N/A	3.364	AV
2		5350.000	46.634	43.289	-7.366	54.000	3.344	AV
3	*	5355.000	46.895	43.593	-7.105	54.000	3.303	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 21:02
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT40 at 5510MHz	

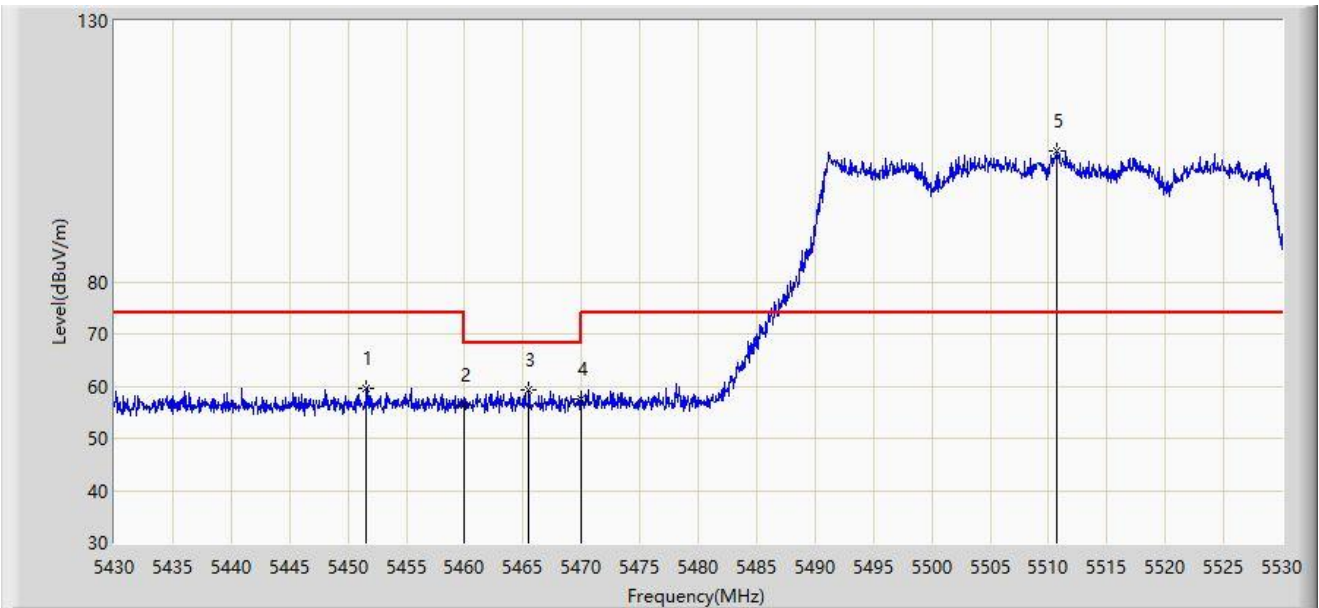


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5451.600	59.707	56.152	-14.293	74.000	3.556	PK
2		5460.000	56.316	52.686	-17.684	74.000	3.630	PK
3	*	5465.500	59.150	55.486	-9.050	68.200	3.664	PK
4		5470.000	57.638	53.947	-10.562	68.200	3.691	PK
5		5510.650	105.130	101.344	N/A	N/A	3.786	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 21:04
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT40 at 5510MHz	

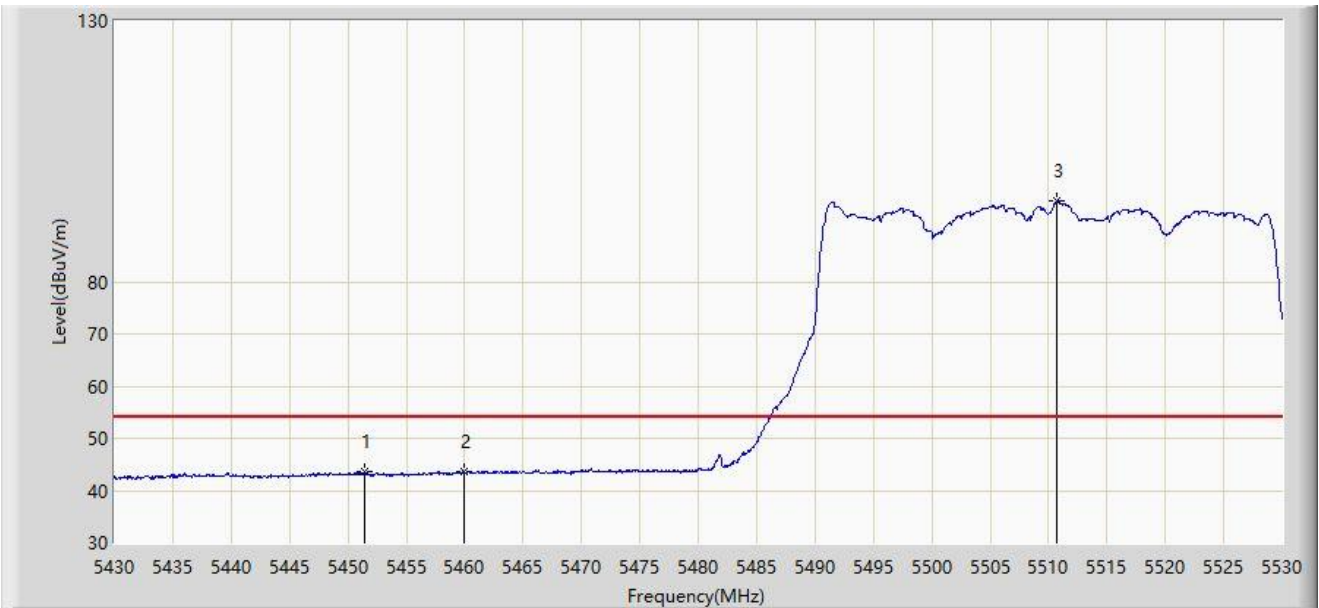


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5451.450	43.525	39.970	-10.475	54.000	3.555	AV
2	*	5460.000	43.570	39.940	-10.430	54.000	3.630	AV
3		5510.750	95.394	91.609	N/A	N/A	3.785	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 21:06
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT40 at 5510MHz	

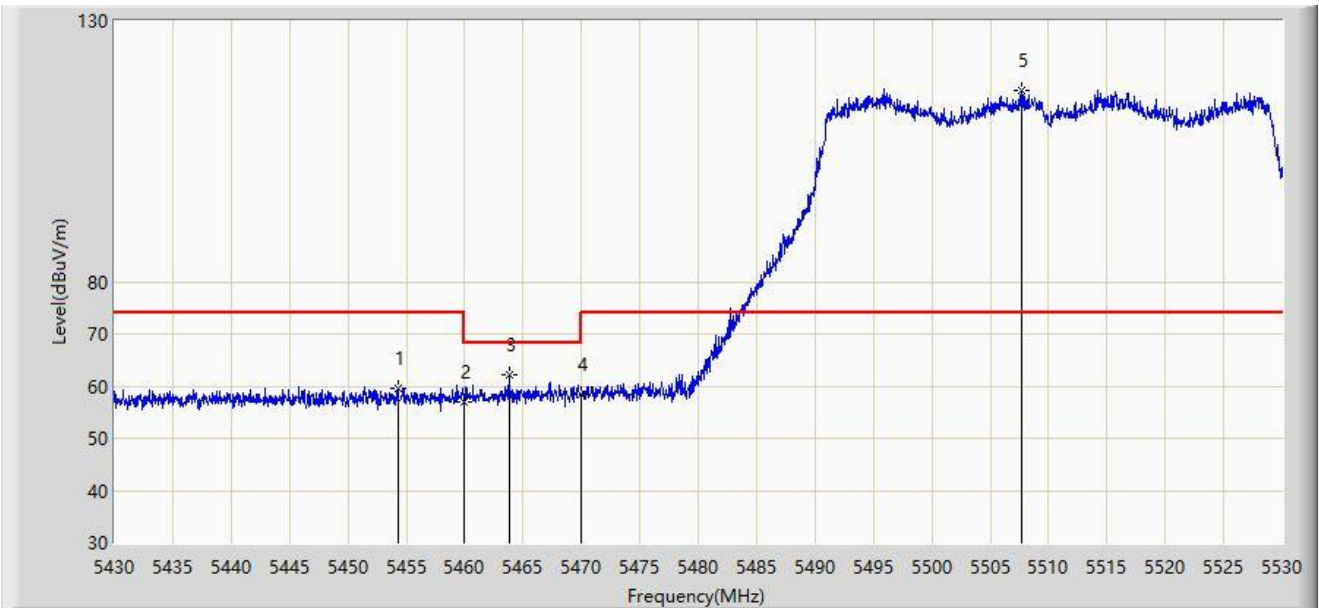


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5454.250	59.661	56.098	-14.339	74.000	3.562	PK
2		5460.000	57.075	53.445	-16.925	74.000	3.630	PK
3	*	5463.800	62.087	58.434	-6.113	68.200	3.653	PK
4		5470.000	58.519	54.828	-9.681	68.200	3.691	PK
5		5507.700	116.540	112.726	N/A	N/A	3.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Time: 2023/01/16 - 21:08
Limit: FCC_5G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: BE33000 Whole Home Mesh Wi-Fi 7 System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11BE-EHT40 at 5510MHz	

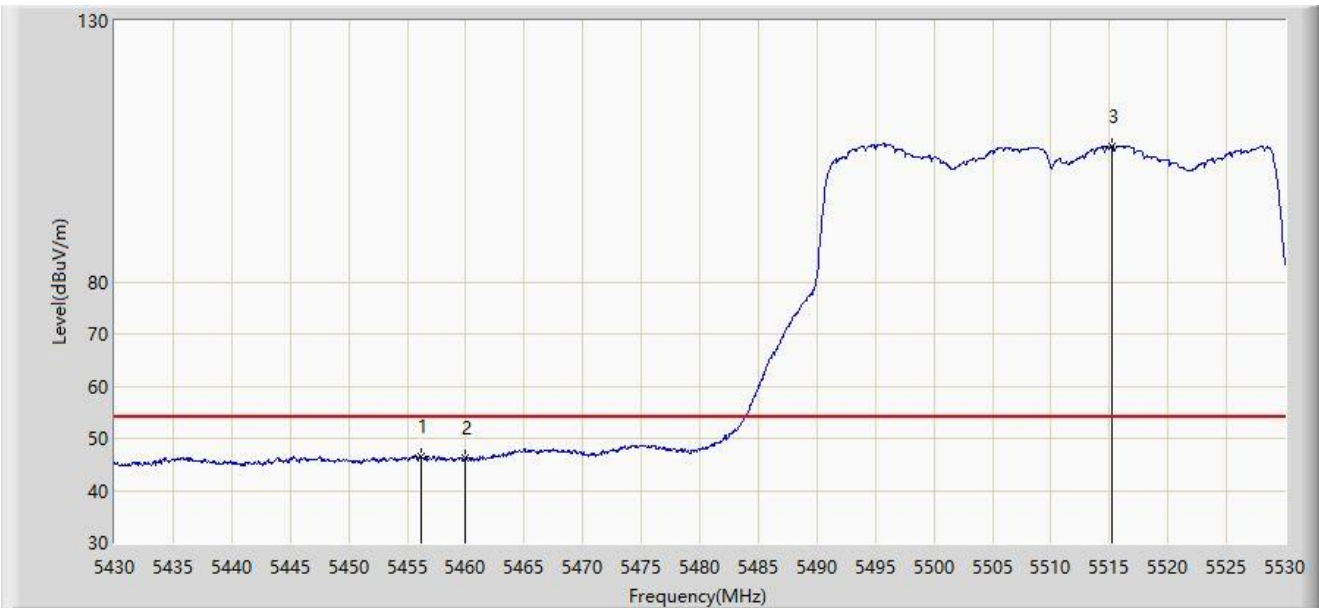

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5456.150	46.643	43.046	-7.357	54.000	3.597	AV
2		5460.000	46.283	42.653	-7.717	54.000	3.630	AV
3		5515.200	106.031	102.295	N/A	N/A	3.737	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).