


802.11 n40 CH06 (2437MHz)




802.11 n40 CH06 (2437MHz)




802.11 n40 CH06 (2437MHz)

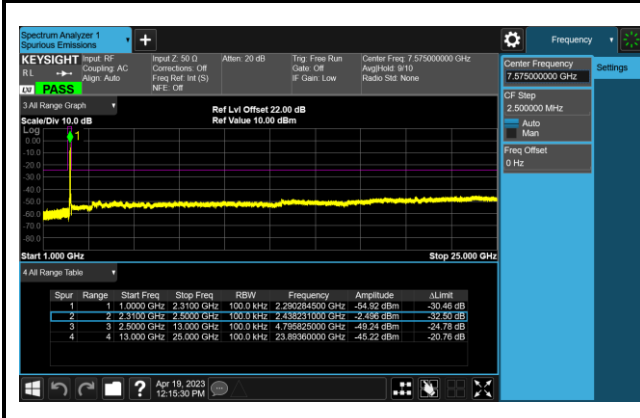


802.11 n40 CH09 (2452MHz)

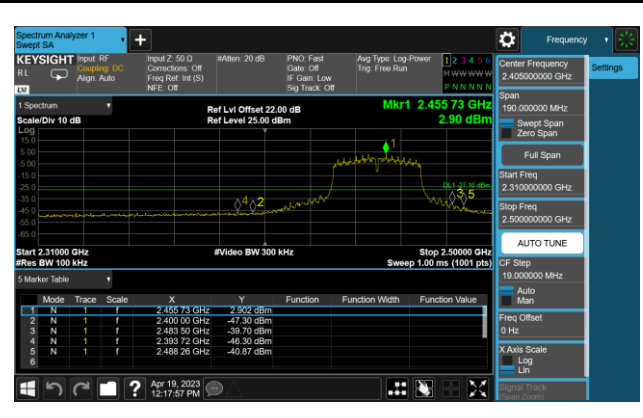

802.11 n40 CH09 (2452MHz)

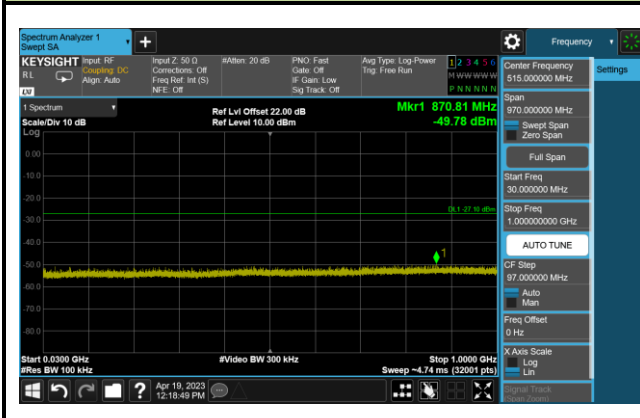


802.11 n40 CH09 (2452MHz)

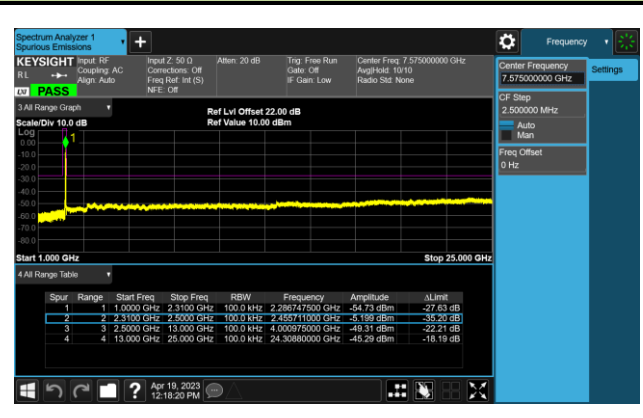


Antenna 1


802.11 b CH01 (2412MHz)

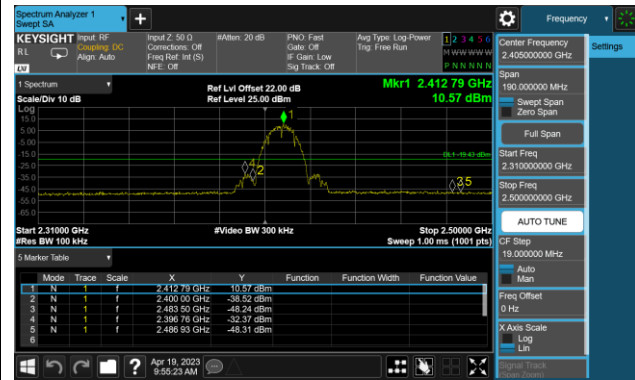

802.11 b CH01 (2412MHz)

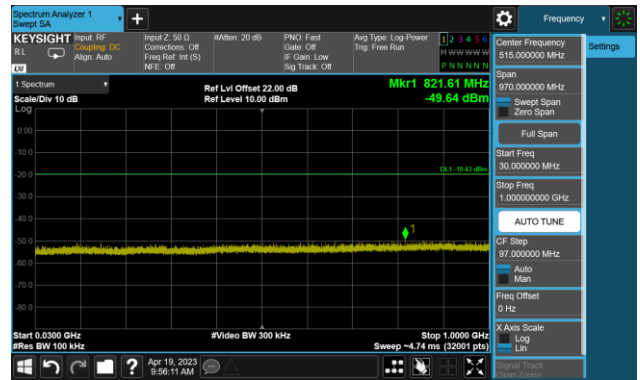


802.11 b CH01 (2412MHz)

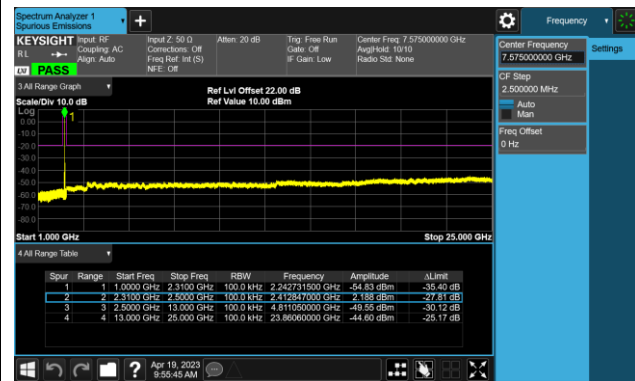


802.11 b CH06 (2437MHz)



802.11 b CH06 (2437MHz)

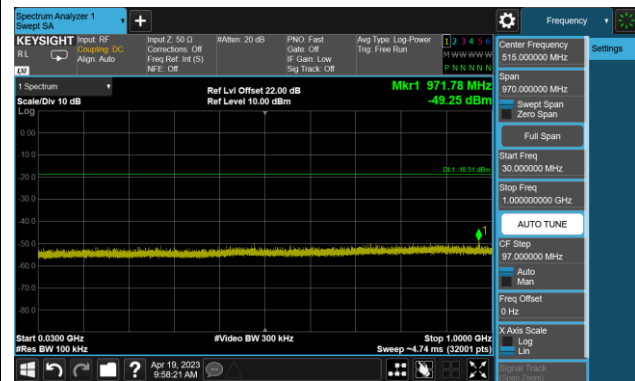


802.11 b CH06 (2437MHz)

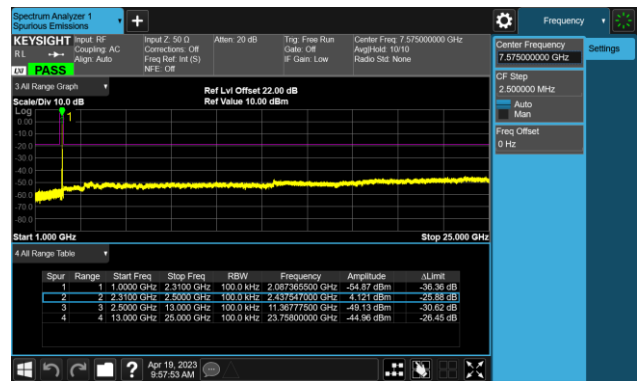


802.11 b CH11 (2462MHz)




802.11 b CH11 (2462MHz)

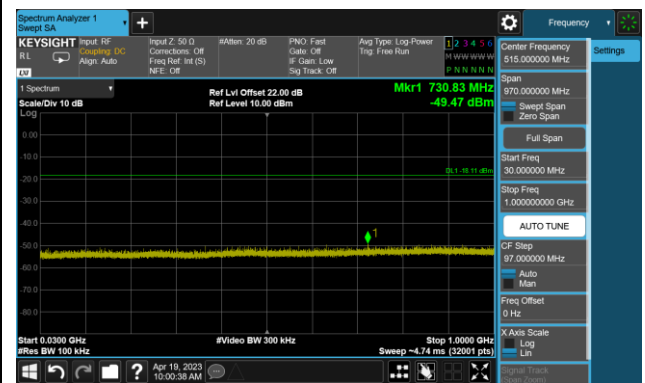


802.11 b CH11 (2462MHz)

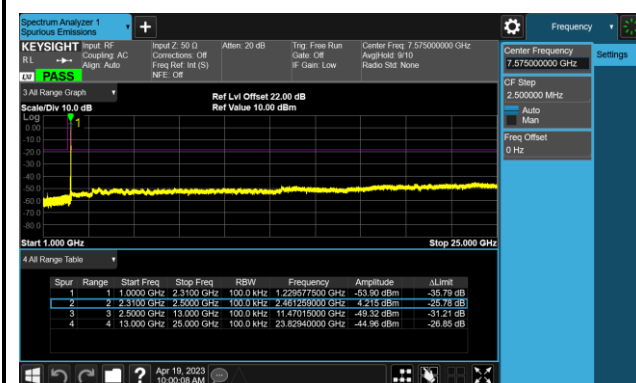


802.11 g CH01 (2412MHz)

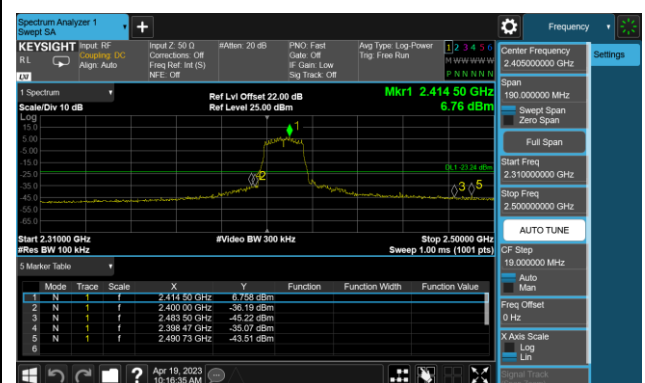

802.11 g CH01 (2412MHz)

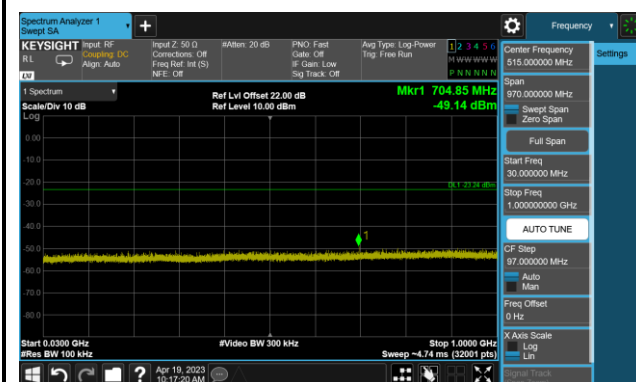

802.11 g CH01 (2412MHz)

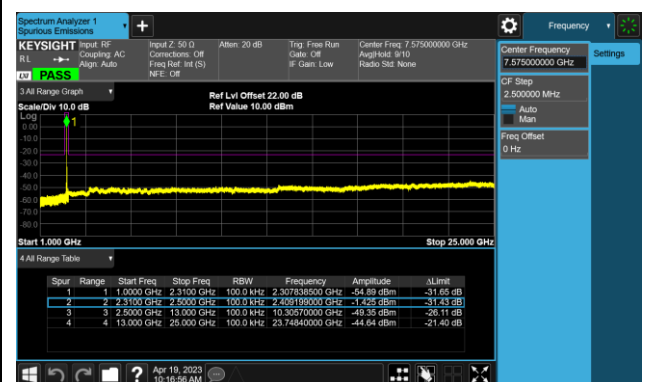


802.11 g CH06 (2437MHz)




802.11 g CH06 (2437MHz)




802.11 g CH06 (2437MHz)

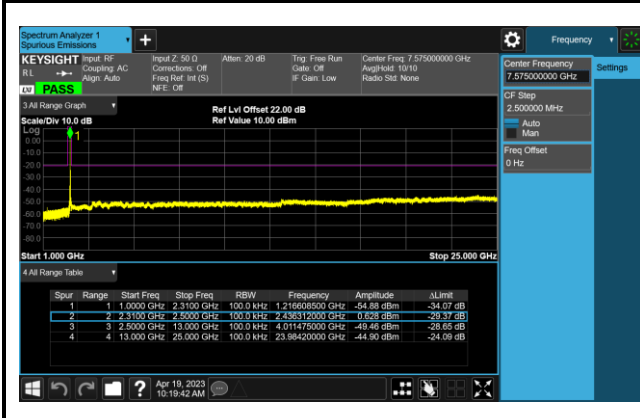


802.11 g CH11 (2462MHz)

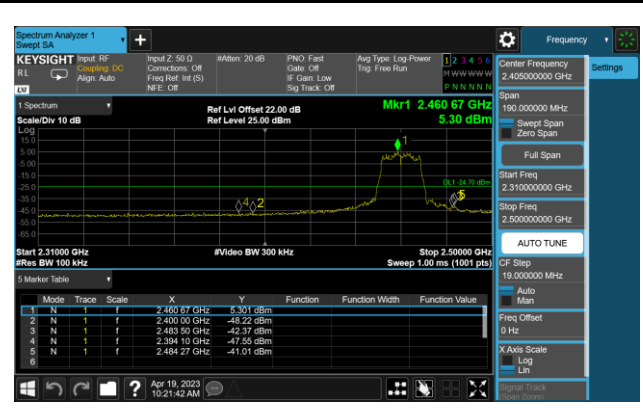


802.11 g CH11 (2462MHz)

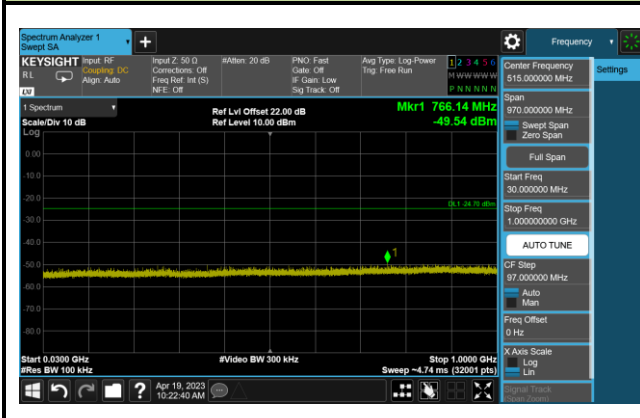


802.11 g CH11 (2462MHz)

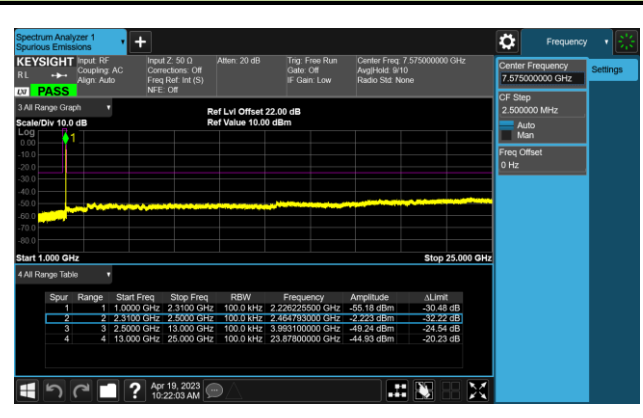


802.11 n20 CH01 (2412MHz)

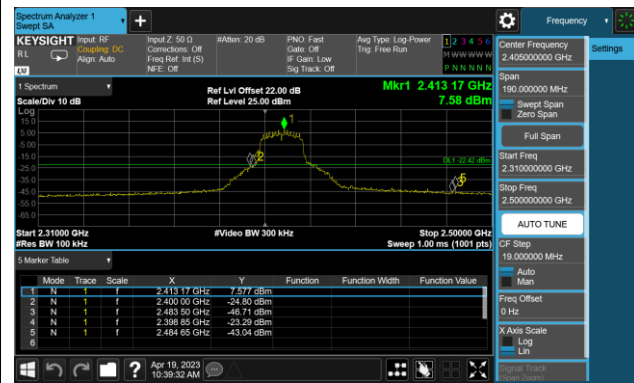


802.11 n20 CH01 (2412MHz)

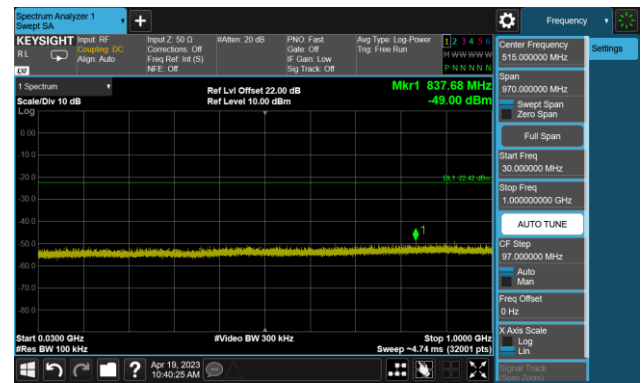


802.11 n20 CH01 (2412MHz)

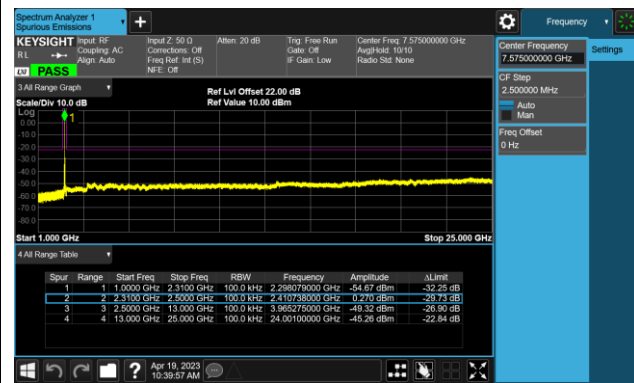


802.11 n20 CH06 (2437MHz)

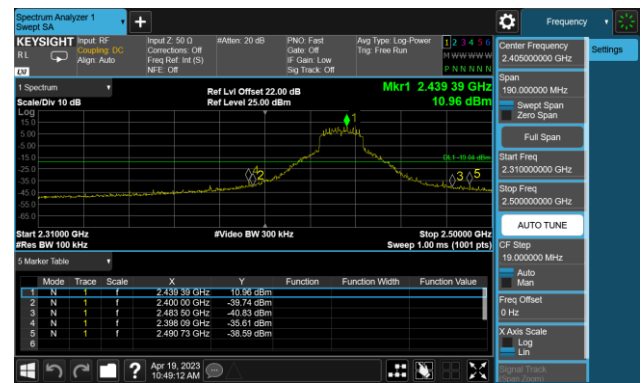

802.11 n20 CH06 (2437MHz)

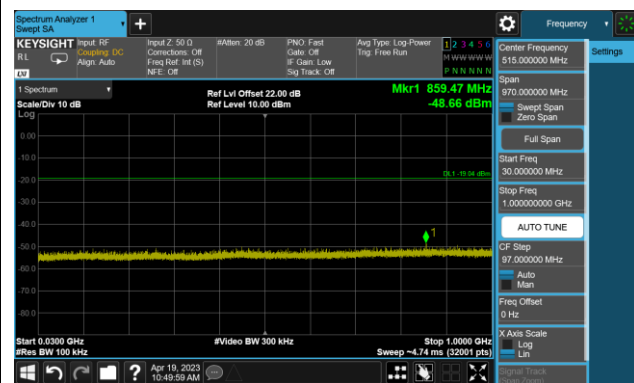


802.11 n20 CH06 (2437MHz)

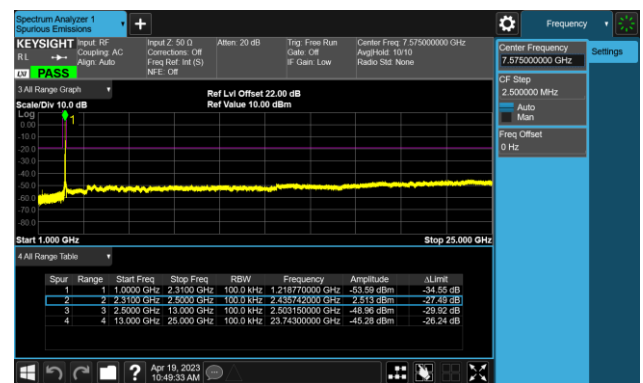


802.11 n20 CH11 (2462MHz)



802.11 n20 CH11 (2462MHz)

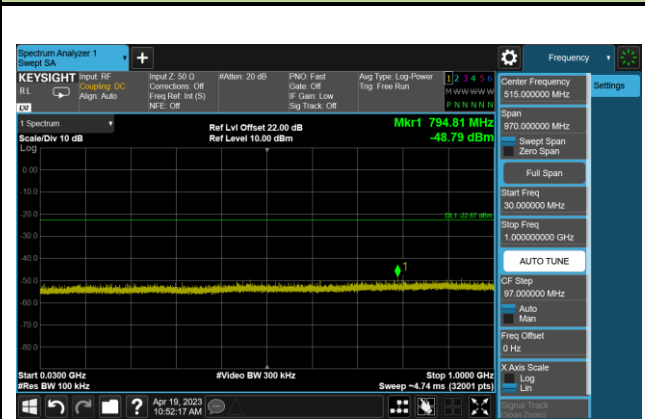


802.11 n20 CH11 (2462MHz)

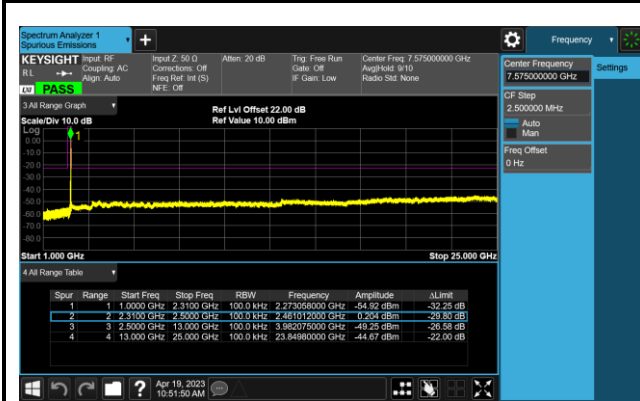


802.11 n40 CH03 (2422MHz)



802.11 n40 CH03 (2422MHz)

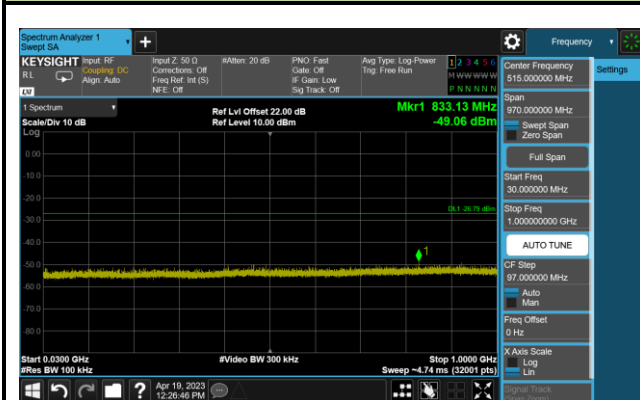


802.11 n40 CH03 (2422MHz)

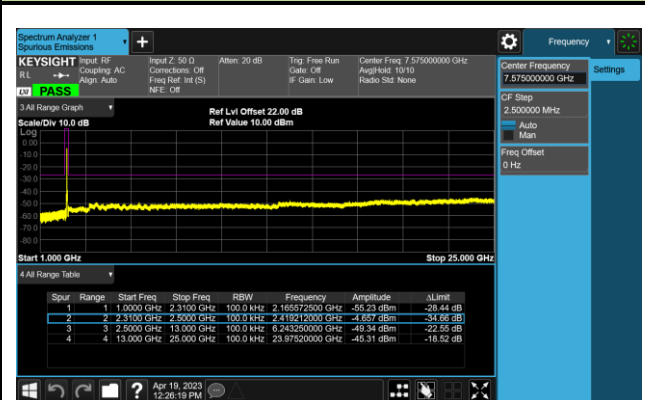


802.11 n40 CH06 (2437MHz)




802.11 n40 CH06 (2437MHz)

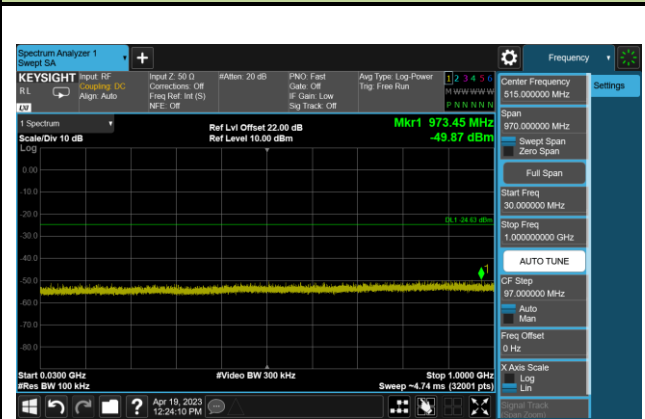


802.11 n40 CH06 (2437MHz)

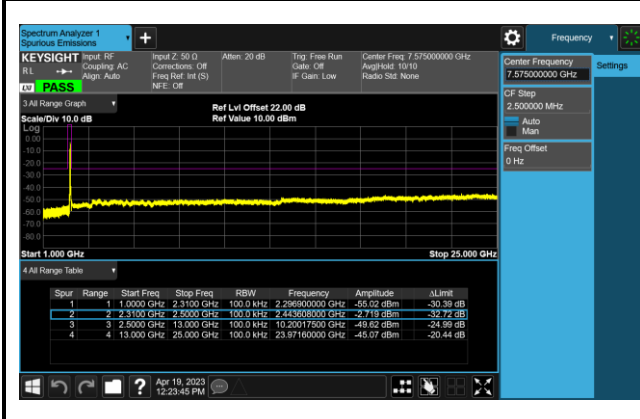


802.11 n40 CH09 (2452MHz)

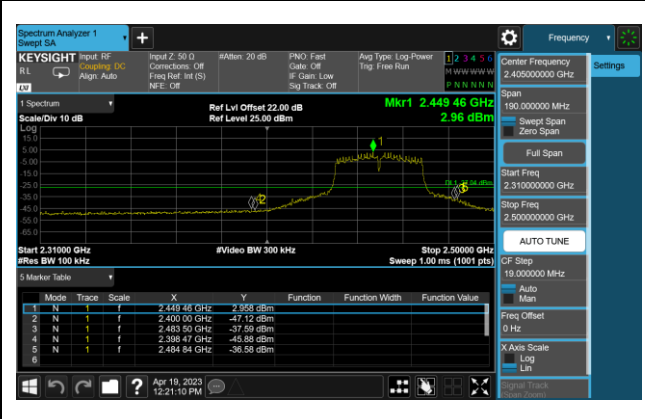

802.11 n40 CH09 (2452MHz)

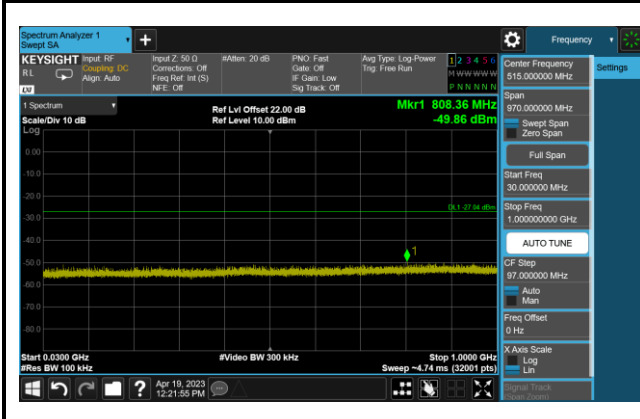

802.11 n40 CH09 (2452MHz)

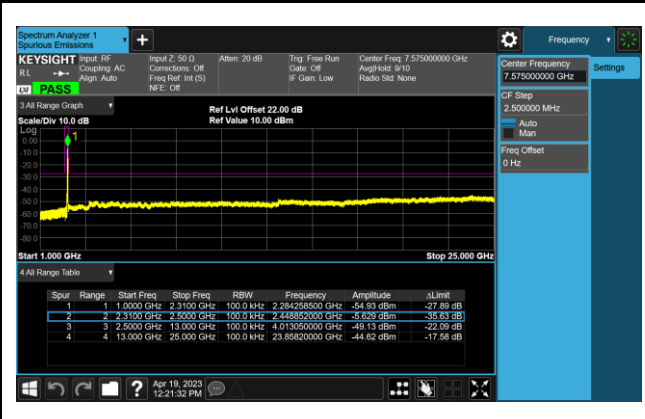

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10-2013 Section 11.11 & 11.12

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

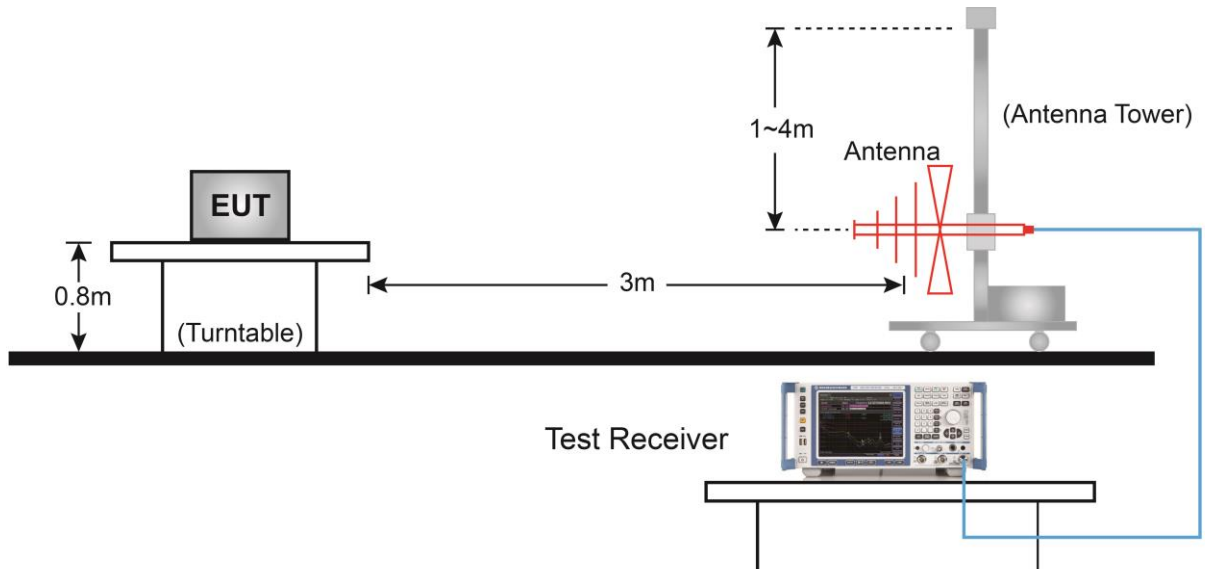


Above 1GHz Test Setup:

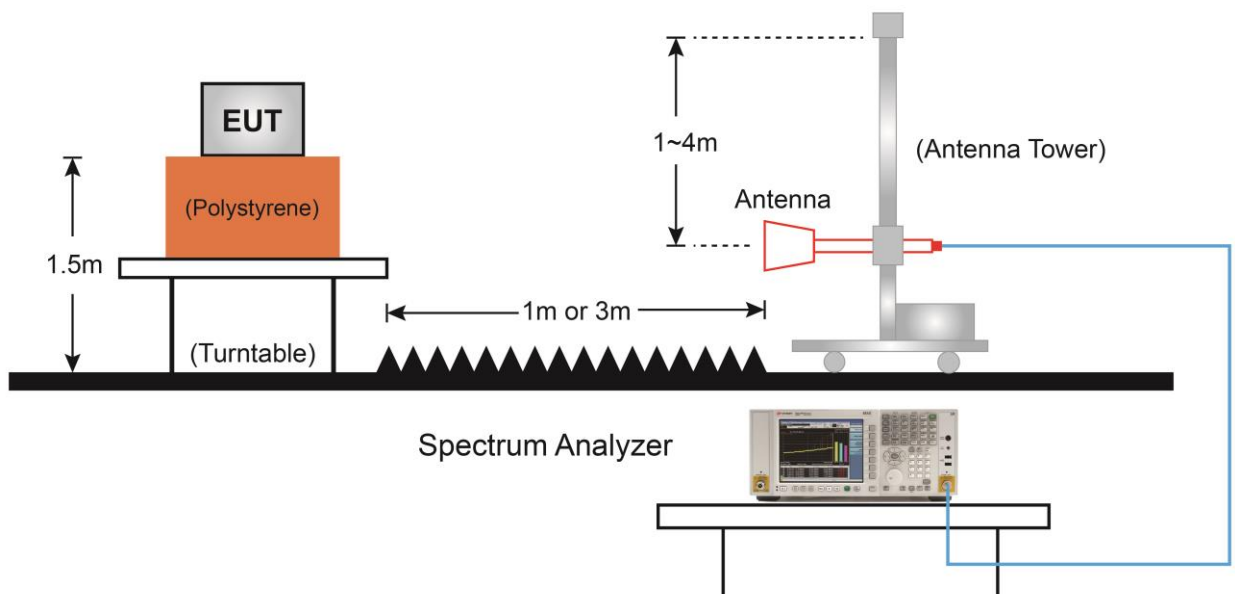

7.6.5. Test Result

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-05-03
Factor	VULB 9162	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

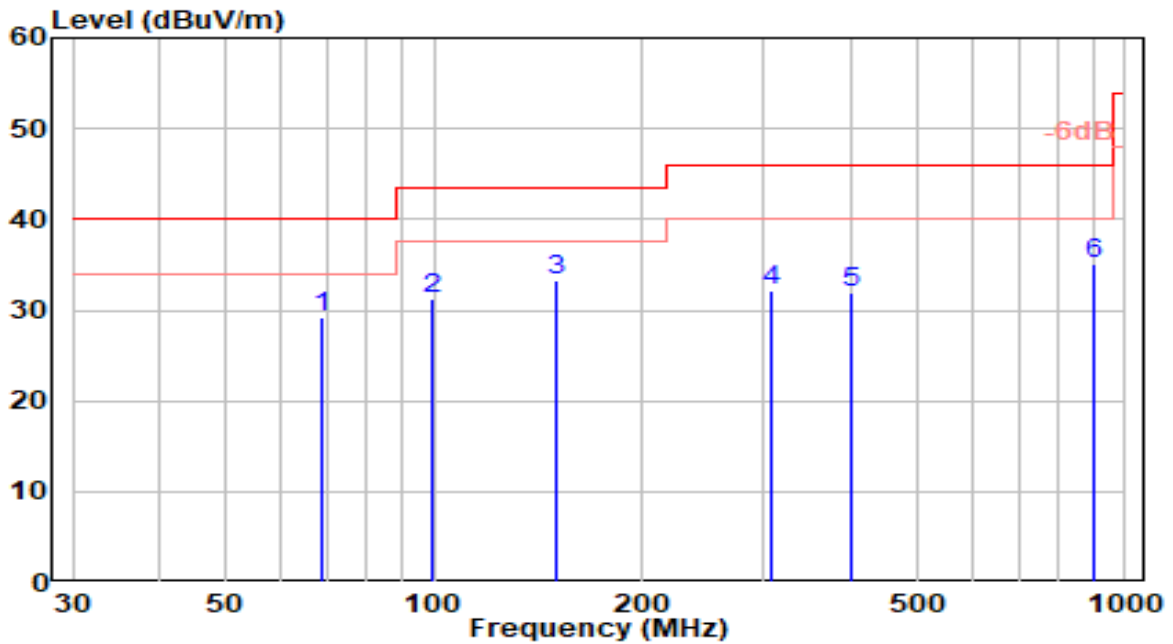


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	68.550	13.23	16.06	29.29	-10.71	40.00	200	53	QP
2	99.760	12.85	18.38	31.23	-12.27	43.50	150	14	QP
3	* 150.410	18.22	14.98	33.20	-10.30	43.50	200	94	QP
4	308.370	11.38	20.79	32.17	-13.83	46.00	100	334	QP
5	401.870	8.73	23.10	31.82	-14.18	46.00	150	174	QP
6	898.750	4.26	30.87	35.13	-10.87	46.00	100	311	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-05-03
Factor	VULB 9162	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

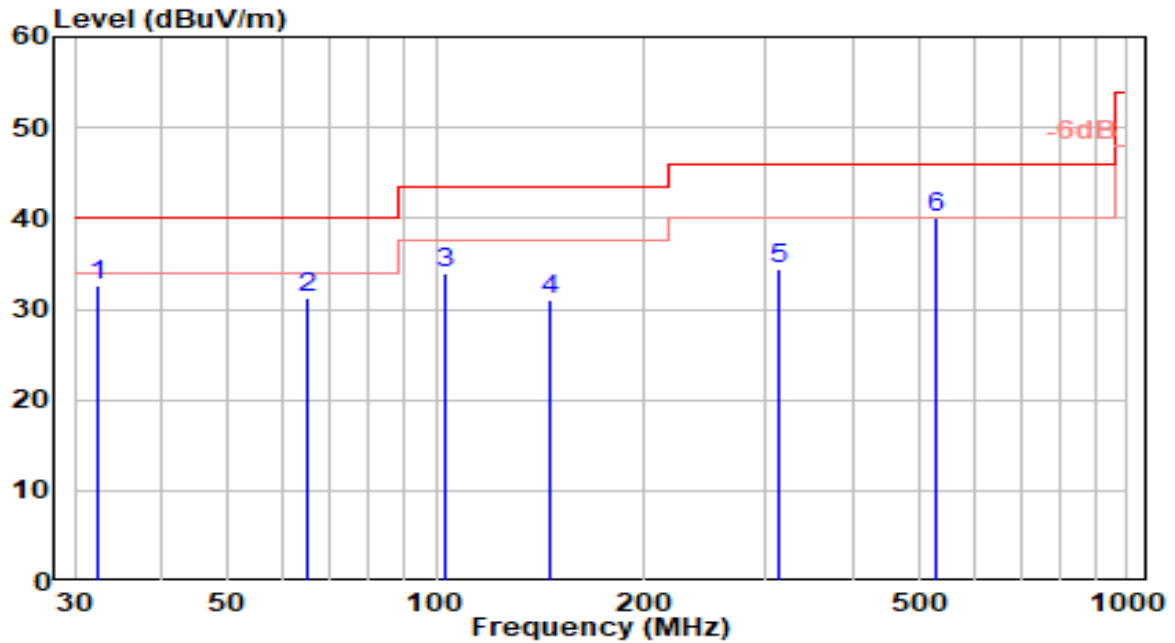


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	32.300	15.62	16.97	32.59	-7.41	40.00	100	73	QP
2	64.880	13.90	17.36	31.27	-8.73	40.00	200	82	QP
3	103.300	15.70	18.30	34.00	-9.50	43.50	100	300	QP
4	146.390	16.22	14.83	31.06	-12.44	43.50	100	7	QP
5	313.420	13.53	20.98	34.51	-11.49	46.00	100	345	QP
6	* 529.850	14.85	25.29	40.14	-5.86	46.00	150	7	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

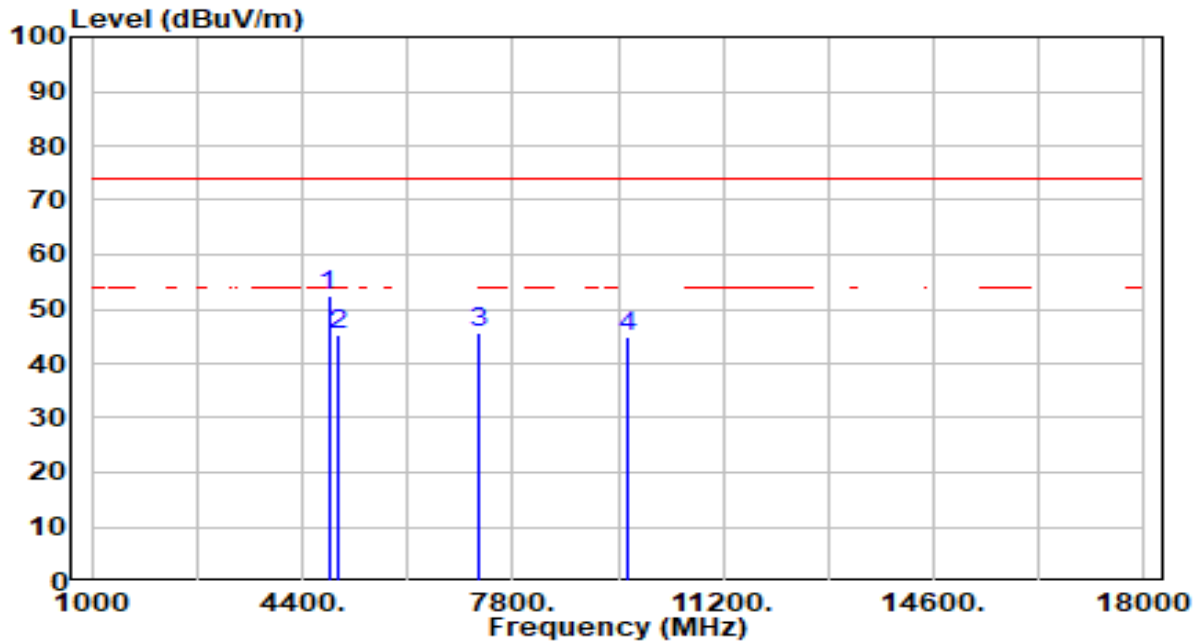


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4824.000	53.71	-1.23	52.48	-21.52	74.00	300	322	Peak
2	4999.000	45.99	-0.87	45.12	-28.88	74.00	300	275	Peak
3	7236.000	41.56	4.16	45.72	-28.28	74.00	300	308	Peak
4	9648.000	41.72	3.29	45.01	-28.99	74.00	300	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-19
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

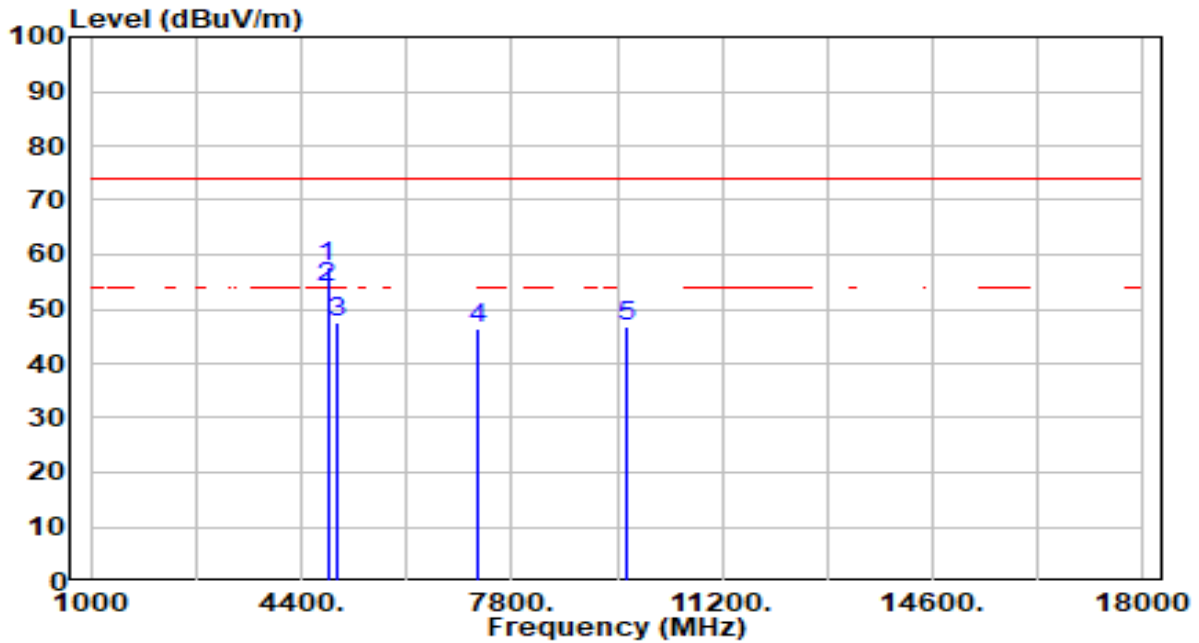


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4824.000	58.79	-1.23	57.56	-16.44	74.00	312	246	Peak
2	*	4824.000	55.04	-1.23	53.81	-0.19	54.00	312	246	Average
3		4999.000	48.34	-0.87	47.46	-26.54	74.00	300	246	Peak
4		7236.000	42.38	4.16	46.54	-27.46	74.00	300	288	Peak
5		9648.000	43.43	3.29	46.72	-27.28	74.00	300	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

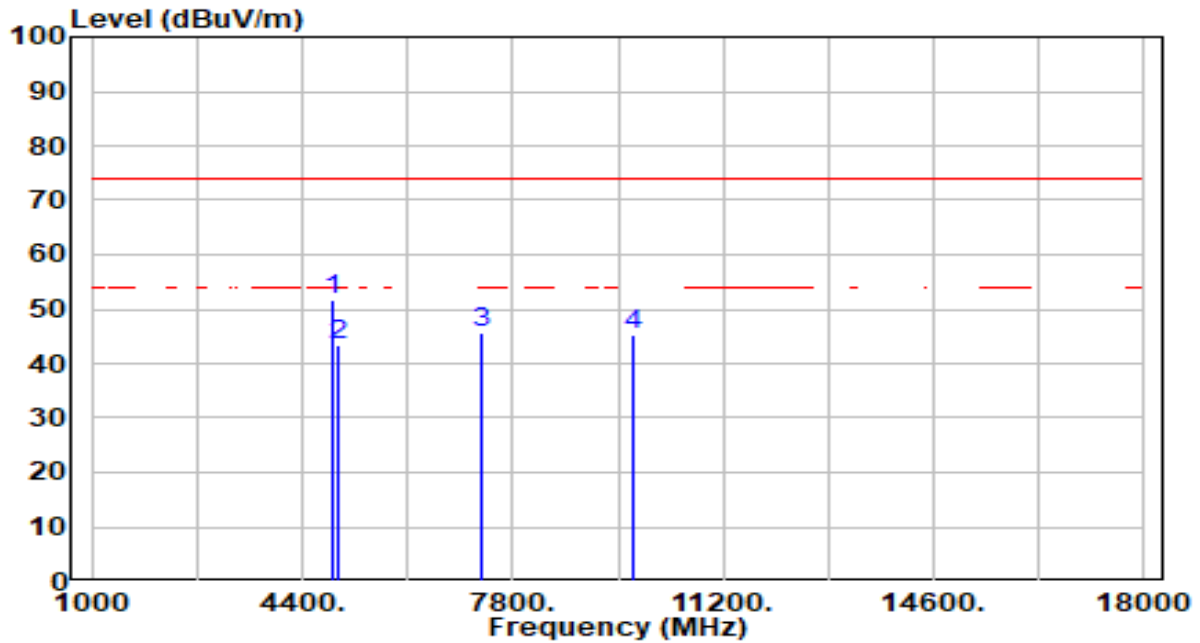


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4874.000	52.82	-1.13	51.69	-22.31	74.00	300	40	Peak
2	4995.000	44.45	-0.88	43.57	-30.43	74.00	300	276	Peak
3	7311.000	41.37	4.14	45.51	-28.49	74.00	300	348	Peak
4	9748.000	42.13	3.33	45.46	-28.54	74.00	300	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

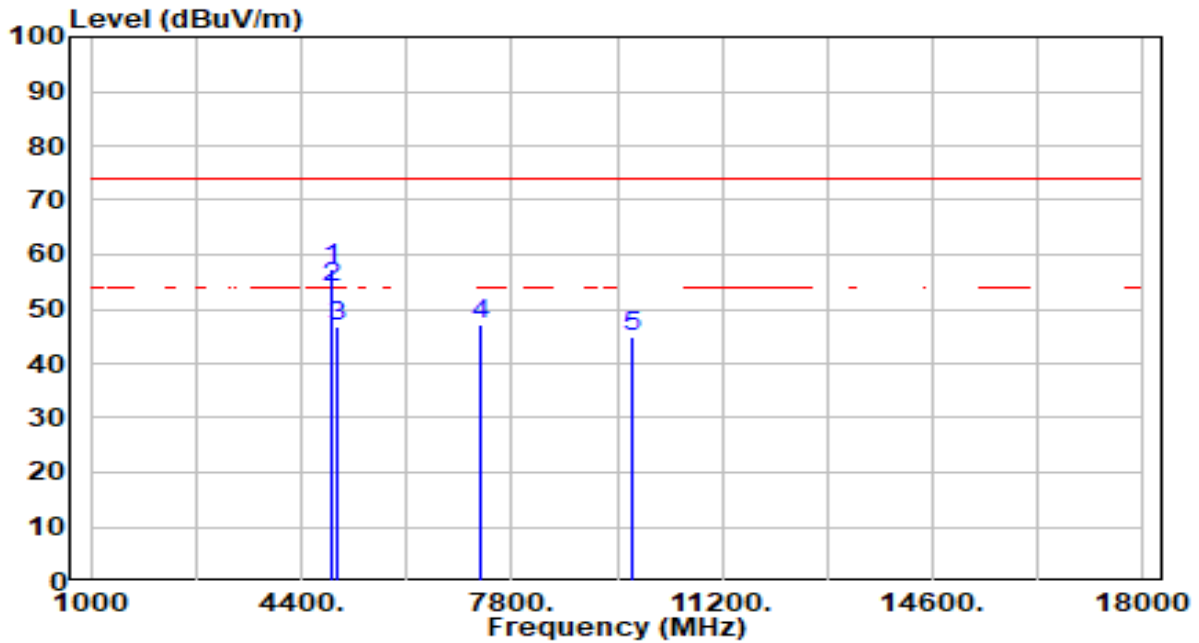


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4874.000	58.61	-1.13	57.48	-16.52	74.00	295	246	Peak
2	* 4874.000	55.02	-1.13	53.89	-0.11	54.00	295	246	Average
3	4995.000	47.60	-0.88	46.72	-27.28	74.00	300	244	Peak
4	7311.000	43.03	4.14	47.17	-26.83	74.00	300	89	Peak
5	9748.000	41.57	3.33	44.90	-29.10	74.00	300	86	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

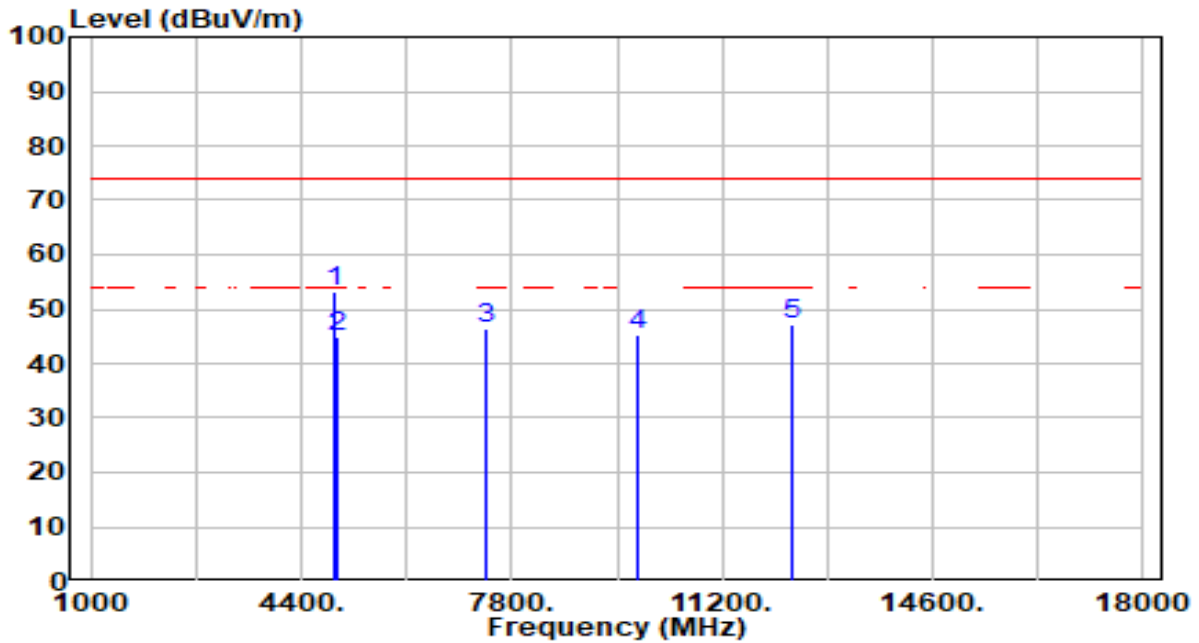


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4924.000	54.23	-1.03	53.20	-20.80	74.00	300	30	Peak
2	4984.000	45.80	-0.90	44.90	-29.10	74.00	300	234	Peak
3	7386.000	42.16	4.11	46.27	-27.73	74.00	300	352	Peak
4	9848.000	42.04	3.39	45.42	-28.58	74.00	300	198	Peak
5	12310.000	42.82	4.52	47.34	-26.66	74.00	300	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

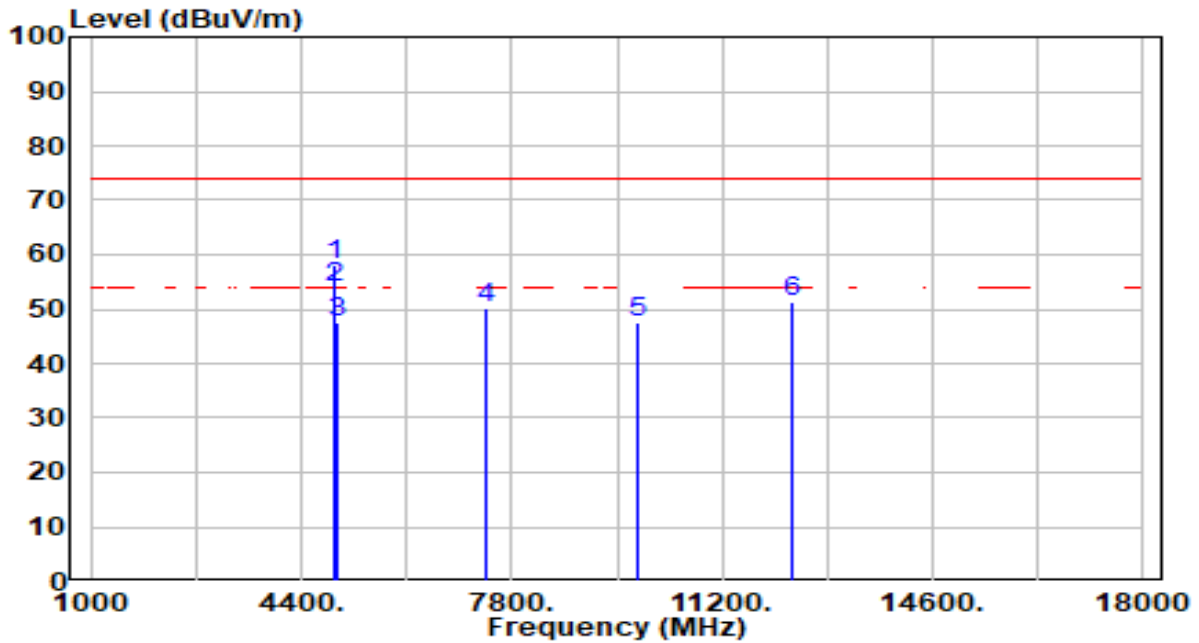


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4924.000	59.14	-1.03	58.11	-15.89	74.00	300	246	Peak
2	*	4924.000	54.93	-1.03	53.90	-0.10	54.00	300	246	Average
3		4984.000	48.40	-0.90	47.50	-26.50	74.00	300	160	Peak
4		7386.000	46.03	4.11	50.15	-23.85	74.00	300	304	Peak
5		9848.000	44.03	3.39	47.42	-26.58	74.00	300	166	Peak
6		12310.000	46.61	4.52	51.13	-22.87	74.00	300	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

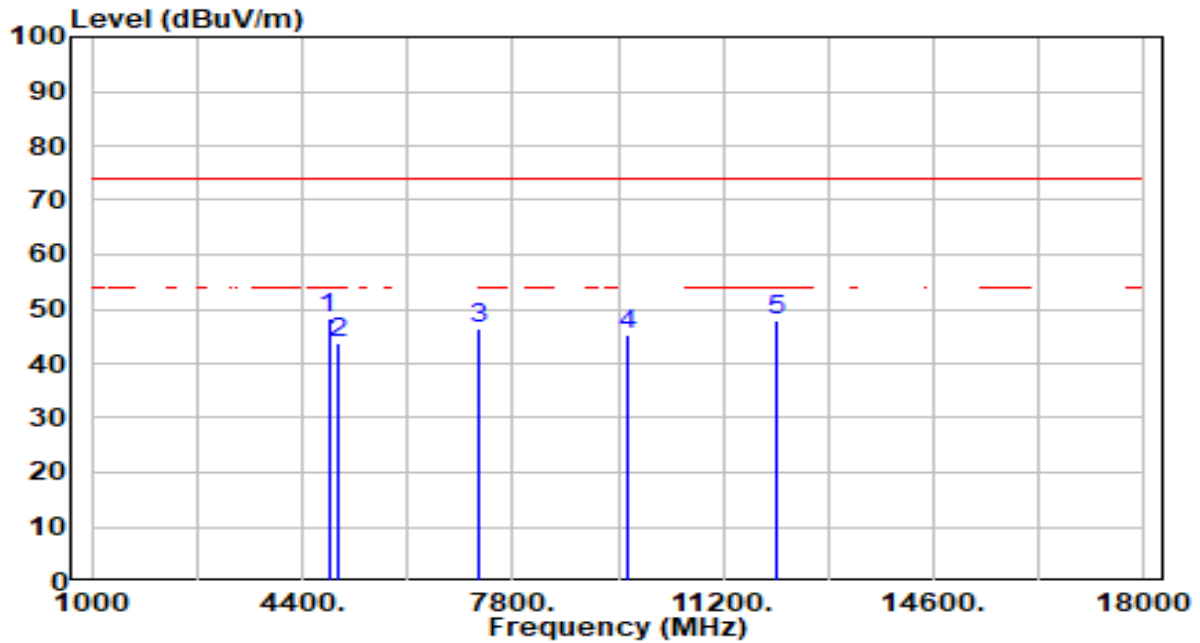


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4824.000	49.66	-1.23	48.43	-25.57	74.00	300	316	Peak
2	4997.000	44.68	-0.88	43.81	-30.19	74.00	300	237	Peak
3	7236.000	42.34	4.16	46.50	-27.50	74.00	300	237	Peak
4	9648.000	41.95	3.29	45.24	-28.76	74.00	300	58	Peak
5	12060.000	43.74	4.30	48.04	-25.96	74.00	300	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

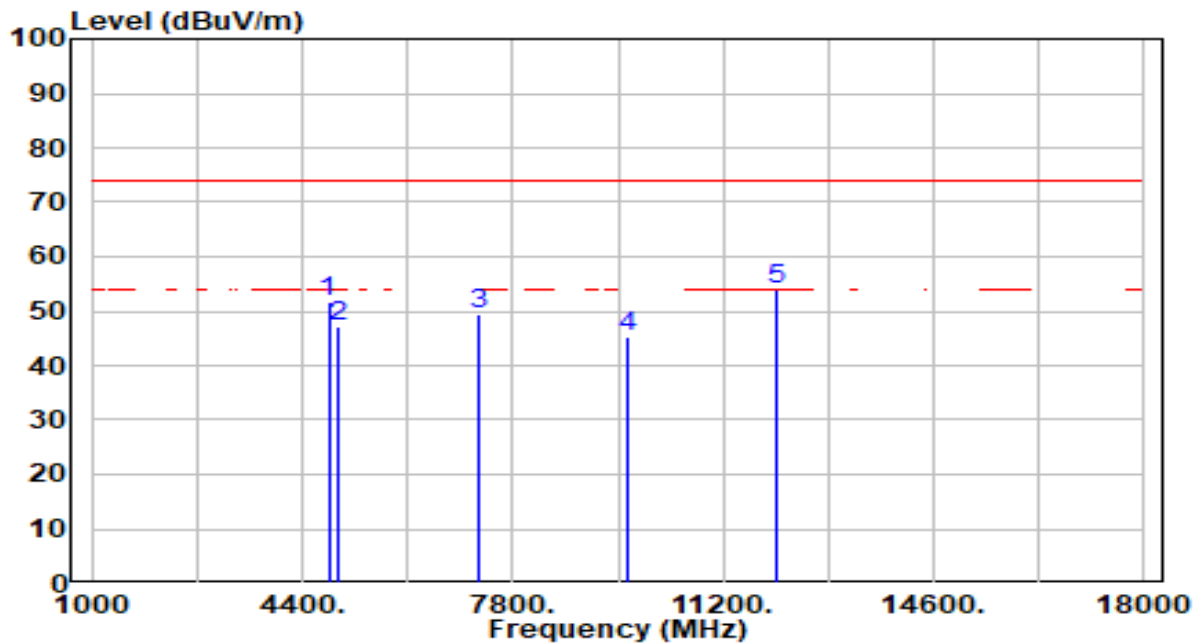


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	52.81	-1.23	51.58	-22.42	74.00	300	241	Peak
2	4997.000	48.07	-0.88	47.20	-26.80	74.00	300	226	Peak
3	7236.000	45.35	4.16	49.51	-24.49	74.00	300	199	Peak
4	9648.000	42.11	3.29	45.40	-28.60	74.00	300	271	Peak
5	* 12060.000	49.67	4.30	53.97	-20.03	74.00	300	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

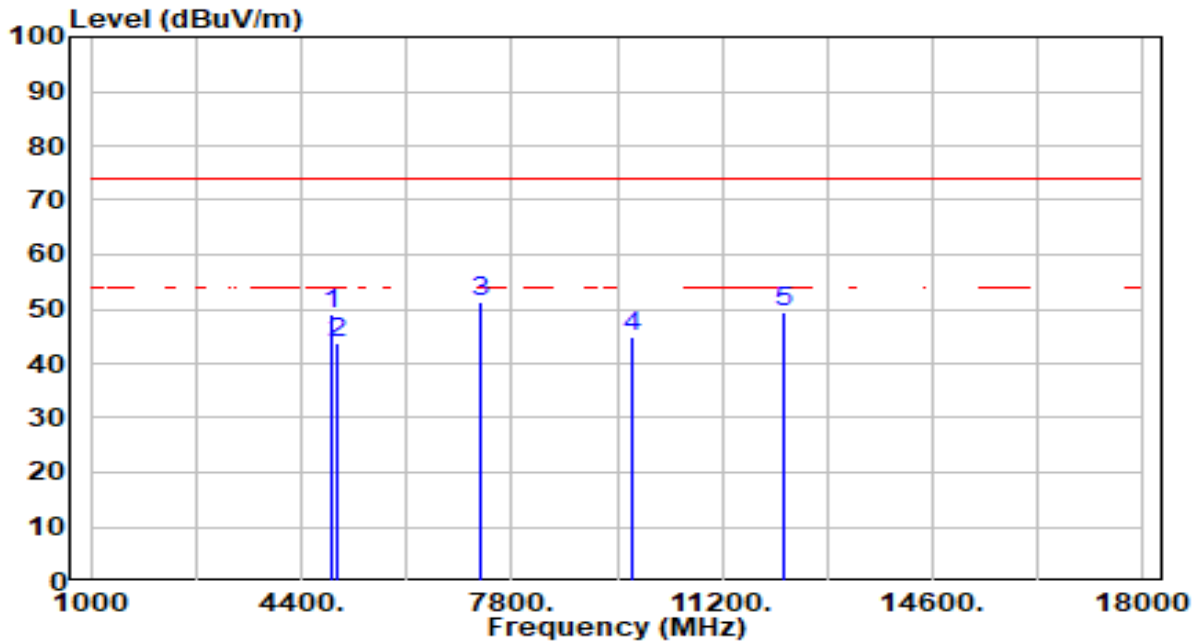


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.17	-1.13	49.05	-24.95	74.00	300	176	Peak
2	4999.000	44.48	-0.87	43.61	-30.39	74.00	300	188	Peak
3	* 7311.000	47.32	4.14	51.46	-22.54	74.00	300	218	Peak
4	9748.000	41.66	3.33	44.99	-29.01	74.00	300	286	Peak
5	12185.000	45.01	4.38	49.39	-24.61	74.00	300	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

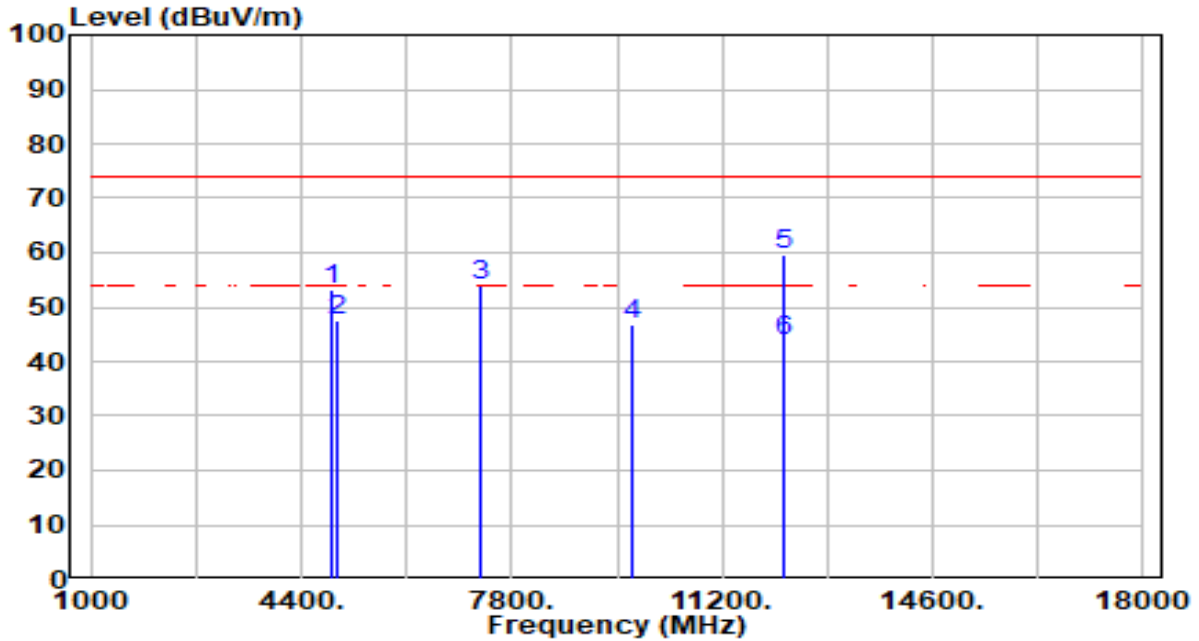


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	54.46	-1.13	53.33	-20.67	74.00	300	245	Peak
2	4999.000	48.41	-0.87	47.54	-26.46	74.00	300	161	Peak
3	7311.000	49.76	4.14	53.90	-20.10	74.00	300	188	Peak
4	9748.000	43.65	3.33	46.97	-27.03	74.00	300	275	Peak
5	* 12185.000	55.41	4.38	59.79	-14.21	74.00	313	308	Peak
6	* 12185.000	39.41	4.38	43.79	-10.21	54.00	313	308	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

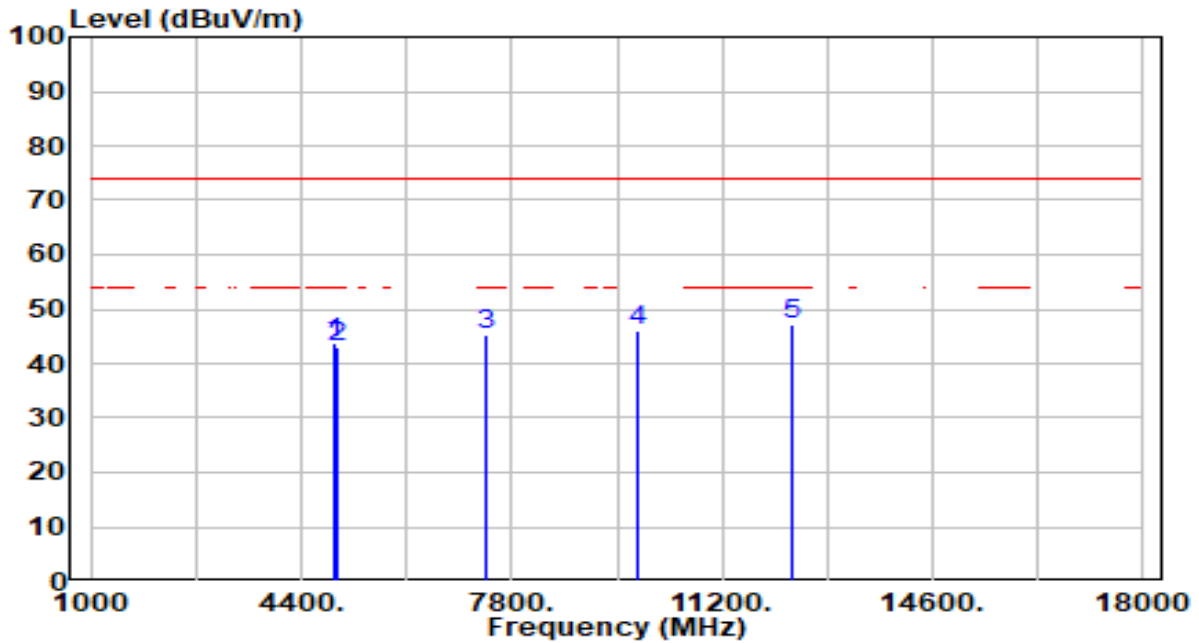


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	44.94	-1.03	43.92	-30.08	74.00	300	325	Peak
2	4994.000	44.01	-0.88	43.13	-30.87	74.00	300	192	Peak
3	7386.000	41.25	4.11	45.36	-28.64	74.00	300	203	Peak
4	9848.000	42.54	3.39	45.92	-28.08	74.00	300	263	Peak
5	* 12310.000	42.77	4.52	47.29	-26.71	74.00	300	113	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

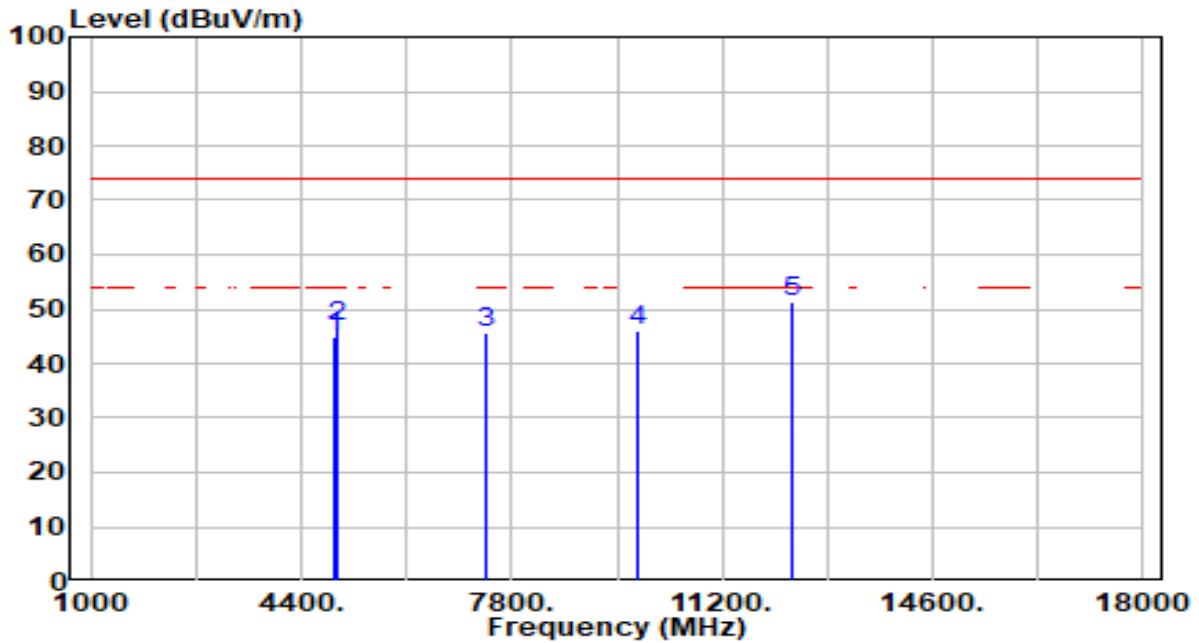


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.88	-1.03	44.86	-29.14	74.00	300	257	Peak
2	4994.000	47.63	-0.88	46.75	-27.25	74.00	300	227	Peak
3	7386.000	41.39	4.11	45.50	-28.50	74.00	300	149	Peak
4	9848.000	42.80	3.39	46.19	-27.81	74.00	300	360	Peak
5	* 12310.000	46.67	4.52	51.19	-22.81	74.00	300	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

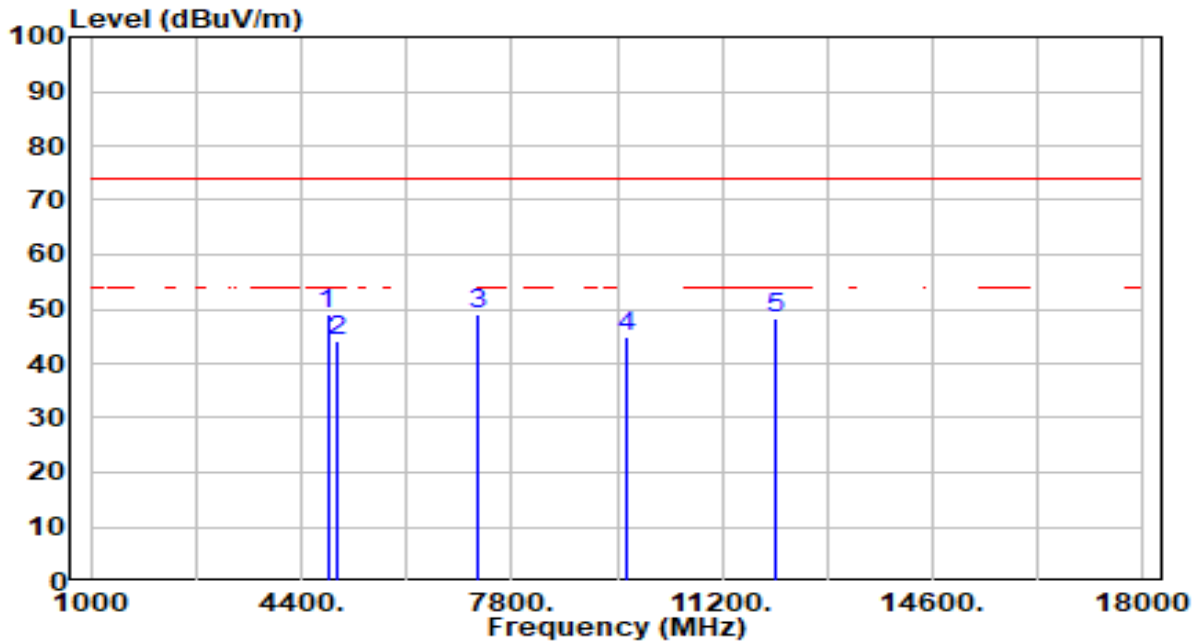


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4824.000	50.27	-1.23	49.05	-24.95	74.00	300	324	Peak
2	4999.000	45.12	-0.87	44.24	-29.76	74.00	300	252	Peak
3	7236.000	44.82	4.16	48.98	-25.02	74.00	300	49	Peak
4	9648.000	41.72	3.29	45.01	-28.99	74.00	300	114	Peak
5	12060.000	44.17	4.30	48.47	-25.53	74.00	300	263	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

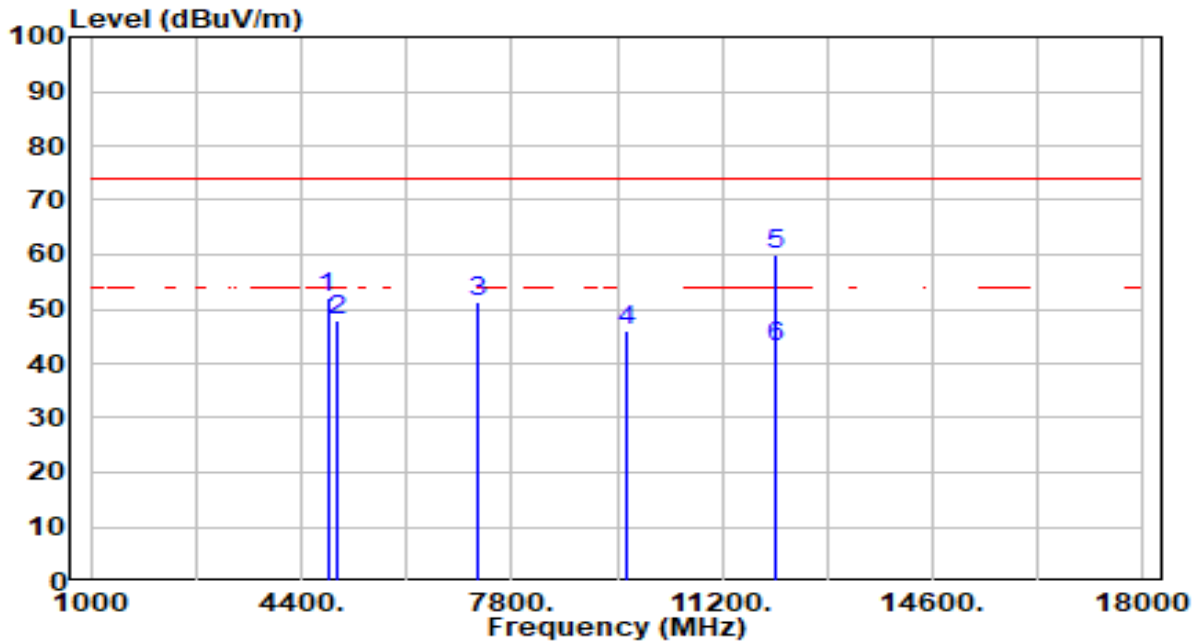


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	53.15	-1.23	51.92	-22.08	74.00	300	253	Peak
2	4999.000	48.83	-0.87	47.96	-26.04	74.00	300	231	Peak
3	7236.000	47.07	4.16	51.22	-22.78	74.00	300	26	Peak
4	9648.000	42.80	3.29	46.09	-27.91	74.00	300	145	Peak
5	* 12060.000	55.67	4.30	59.97	-14.03	74.00	313	307	Peak
6	* 12060.000	38.83	4.30	43.13	-10.87	54.00	313	307	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

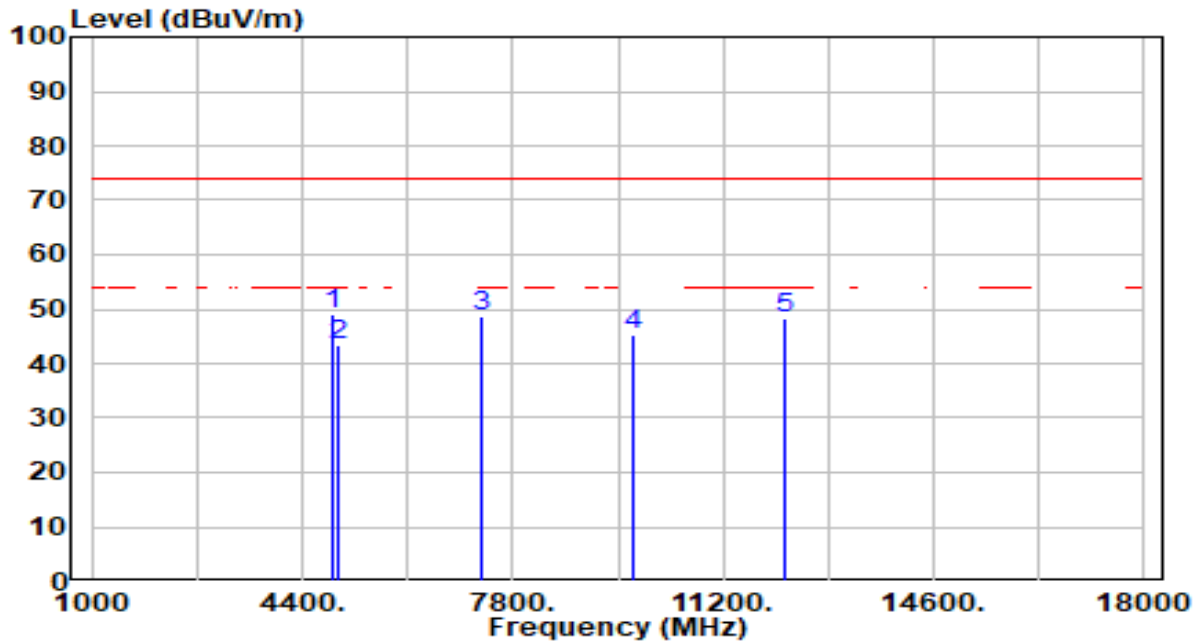


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4874.000	50.02	-1.13	48.89	-25.11	74.00	300	313	Peak
2	5000.000	44.38	-0.87	43.51	-30.49	74.00	300	229	Peak
3	7311.000	44.71	4.14	48.84	-25.16	74.00	300	244	Peak
4	9748.000	41.88	3.33	45.21	-28.79	74.00	300	64	Peak
5	12185.000	43.92	4.38	48.30	-25.70	74.00	300	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

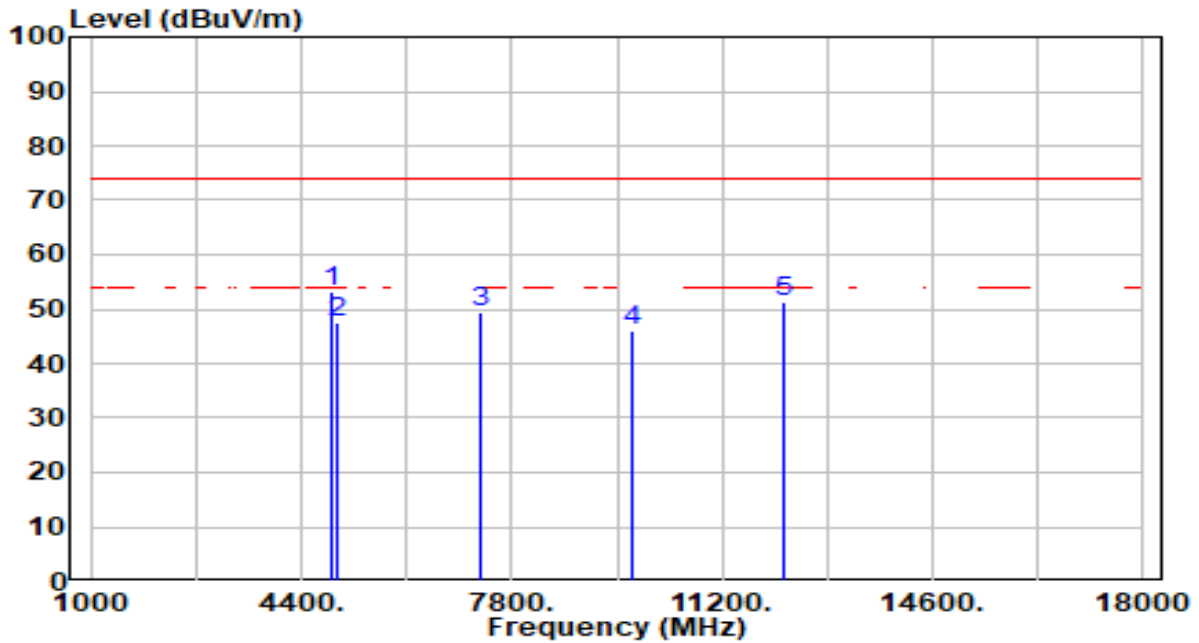


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4874.000	54.20	-1.13	53.07	-20.93	74.00	300	241	Peak
2	5000.000	48.60	-0.87	47.73	-26.27	74.00	300	244	Peak
3	7311.000	45.20	4.14	49.33	-24.67	74.00	300	160	Peak
4	9748.000	42.68	3.33	46.01	-27.99	74.00	300	199	Peak
5	12185.000	47.02	4.38	51.40	-22.60	74.00	300	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

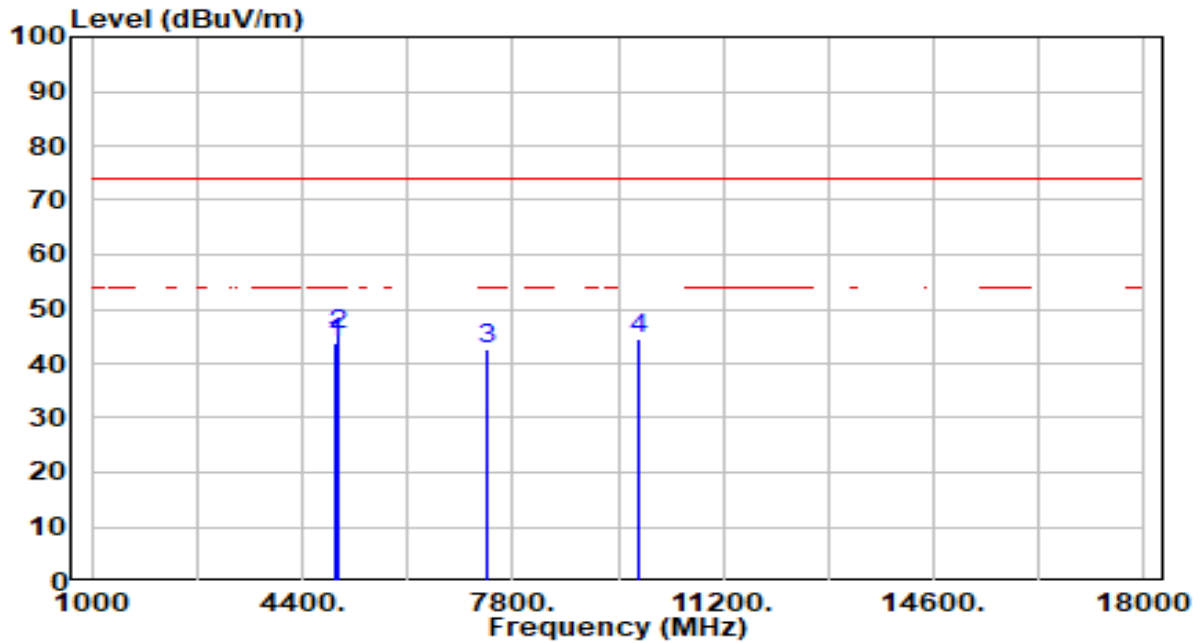


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	44.84	-1.03	43.81	-30.19	74.00	300	332	Peak
2	* 4994.000	46.11	-0.88	45.22	-28.78	74.00	300	190	Peak
3	7386.000	38.43	4.11	42.54	-31.46	74.00	300	317	Peak
4	9848.000	41.05	3.39	44.44	-29.56	74.00	300	317	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

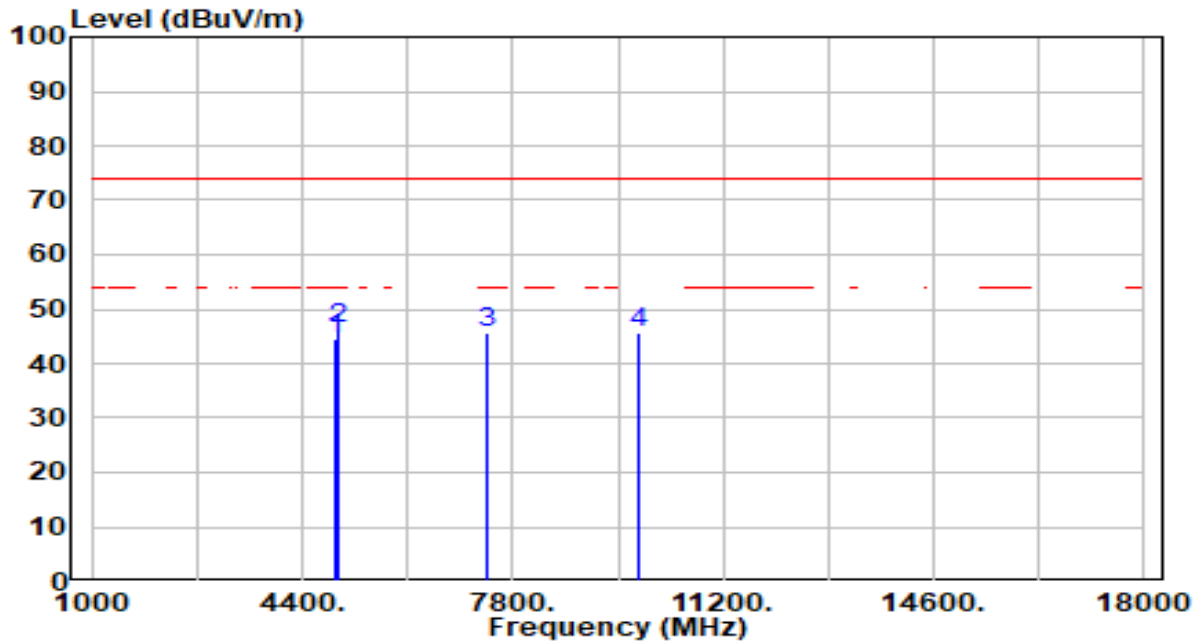


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.70	-1.03	44.68	-29.32	74.00	300	251	Peak
2	* 4994.000	47.35	-0.88	46.47	-27.53	74.00	300	229	Peak
3	7386.000	41.60	4.11	45.71	-28.29	74.00	300	161	Peak
4	9848.000	42.24	3.39	45.63	-28.37	74.00	300	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

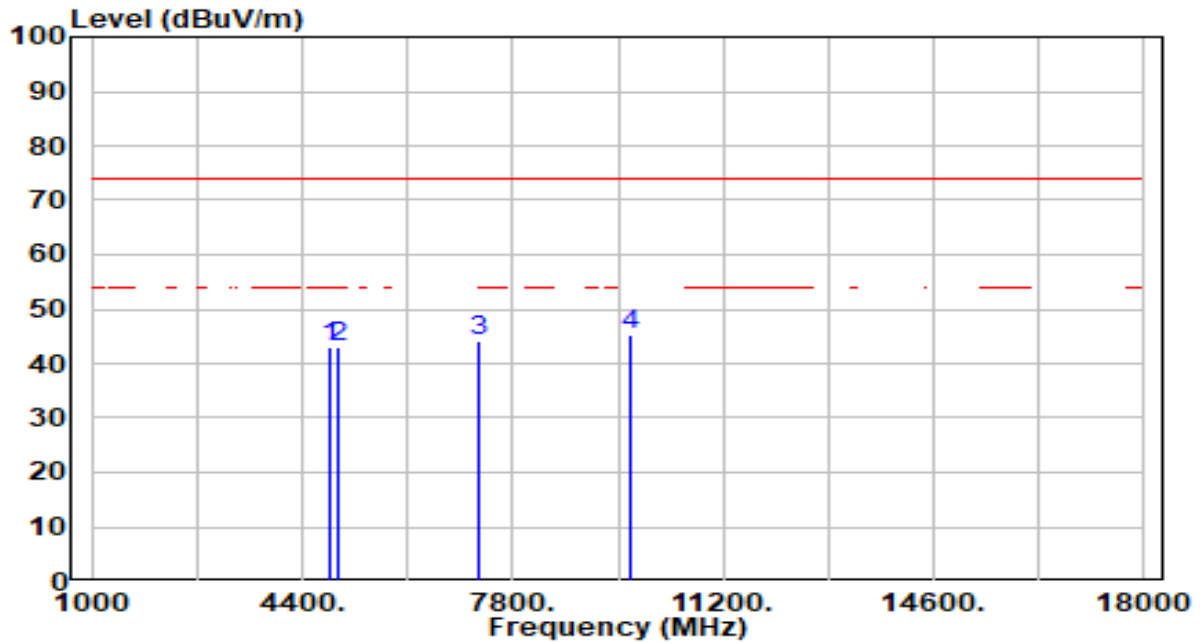


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	44.15	-1.19	42.96	-31.04	74.00	300	176	Peak
2	4986.000	43.80	-0.90	42.90	-31.10	74.00	300	230	Peak
3	7266.000	39.95	4.15	44.10	-29.90	74.00	300	244	Peak
4	* 9688.000	41.85	3.30	45.15	-28.85	74.00	300	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

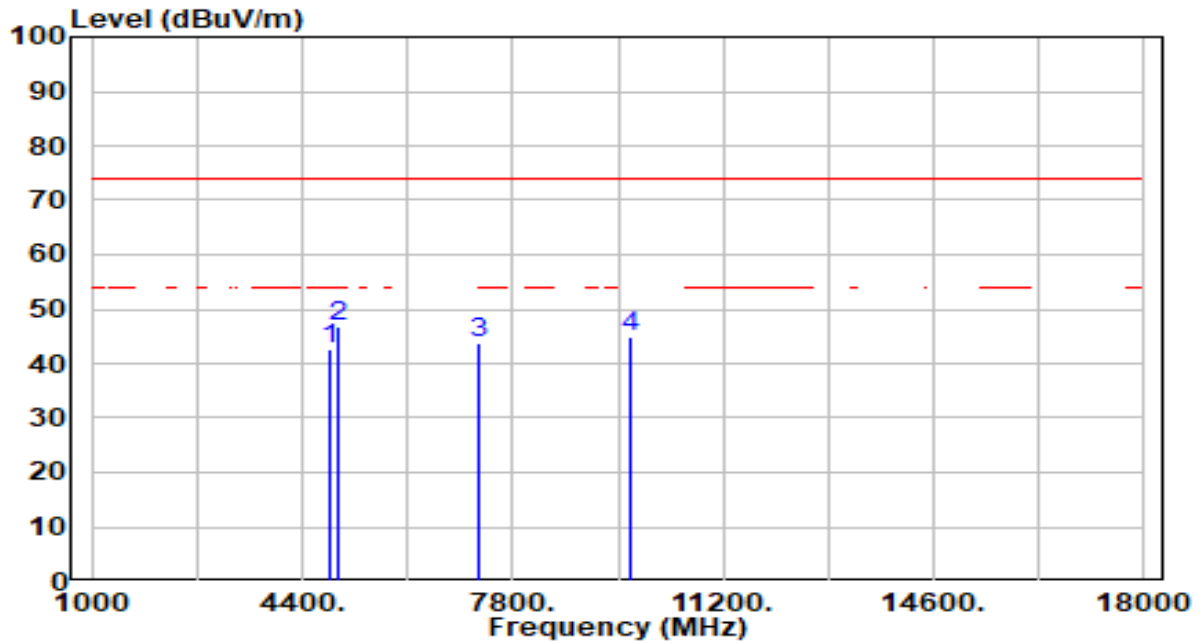


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	43.82	-1.19	42.63	-31.37	74.00	300	250	Peak
2	* 4986.000	47.66	-0.90	46.77	-27.23	74.00	300	229	Peak
3	7266.000	39.75	4.15	43.90	-30.10	74.00	300	253	Peak
4	9688.000	41.48	3.30	44.78	-29.22	74.00	300	119	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

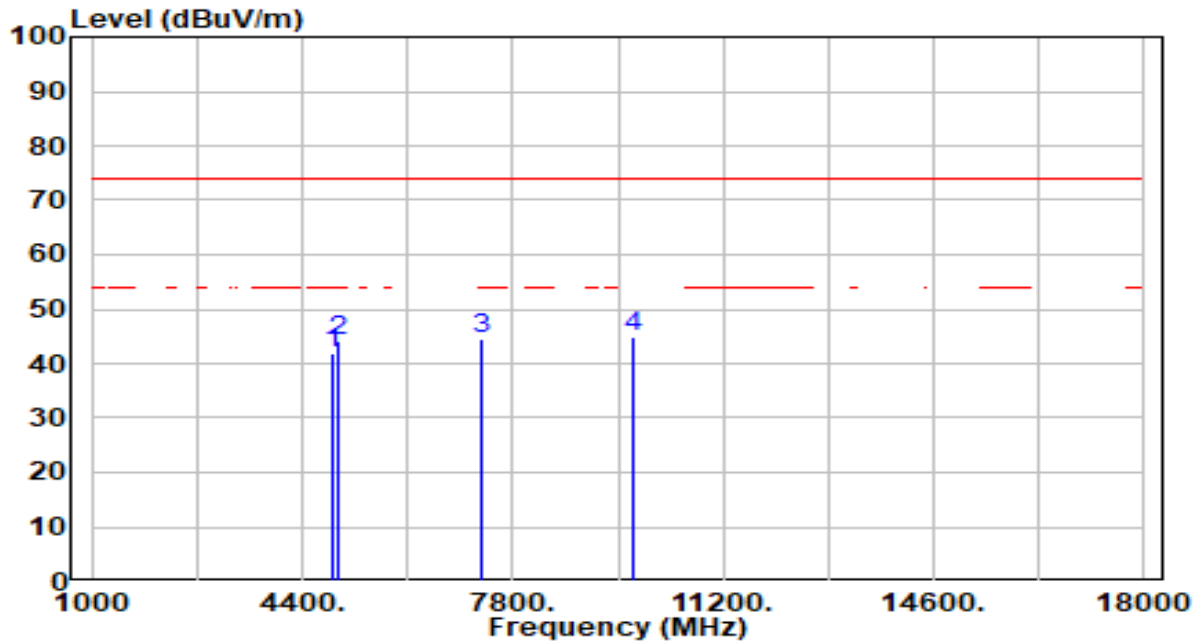


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.08	-1.13	41.95	-32.05	74.00	300	15	Peak
2	4999.000	44.90	-0.87	44.03	-29.97	74.00	300	275	Peak
3	7311.000	40.45	4.14	44.59	-29.41	74.00	300	224	Peak
4	* 9748.000	41.63	3.33	44.96	-29.04	74.00	300	54	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

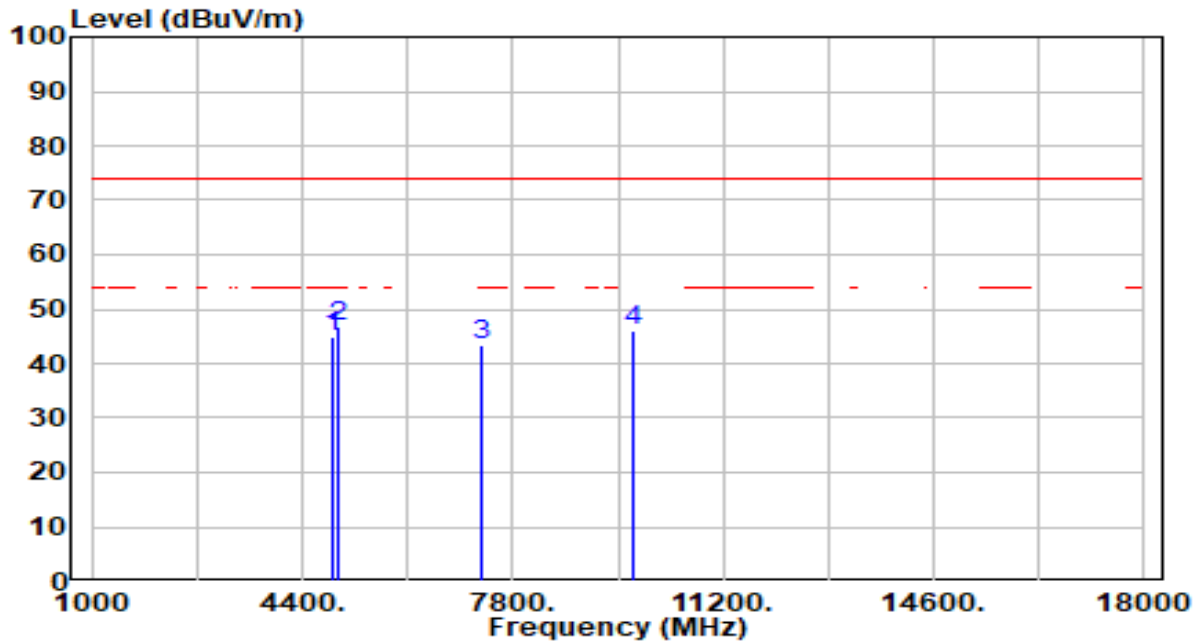


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	46.11	-1.13	44.99	-29.01	74.00	300	249	Peak
2	* 4999.000	47.66	-0.87	46.79	-27.21	74.00	300	232	Peak
3	7311.000	39.37	4.14	43.50	-30.50	74.00	300	360	Peak
4	9748.000	42.54	3.33	45.87	-28.13	74.00	300	109	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

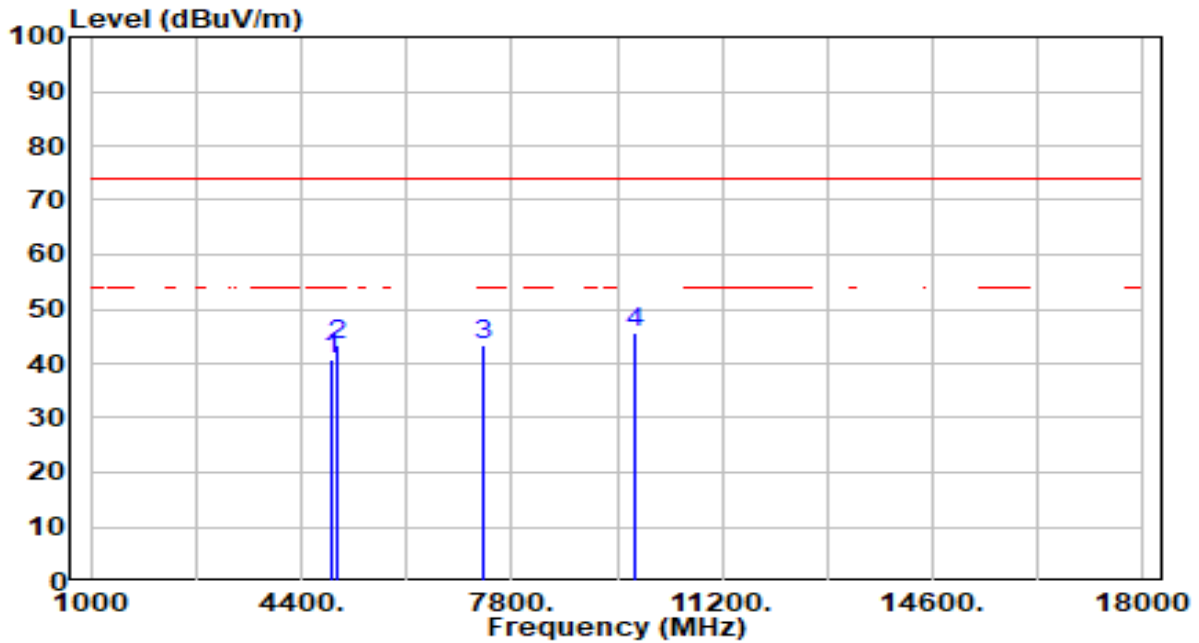


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	42.00	-1.07	40.94	-33.06	74.00	300	90	Peak
2	4983.000	44.21	-0.90	43.31	-30.69	74.00	300	276	Peak
3	7356.000	39.24	4.12	43.37	-30.63	74.00	300	153	Peak
4	* 9808.000	42.25	3.35	45.60	-28.40	74.00	300	326	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

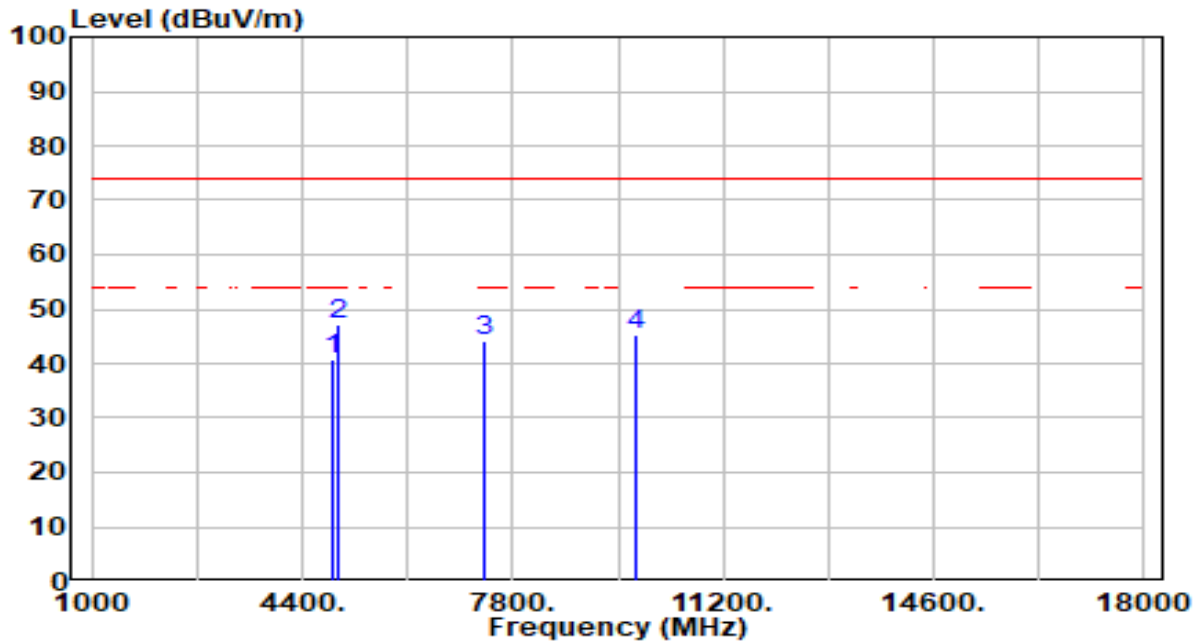

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.74	-1.07	40.67	-33.33	74.00	300	125	Peak
2	* 4983.000	48.11	-0.90	47.21	-26.79	74.00	300	230	Peak
3	7356.000	39.94	4.12	44.07	-29.93	74.00	300	301	Peak
4	9808.000	41.77	3.35	45.12	-28.88	74.00	300	149	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4.Test Setup

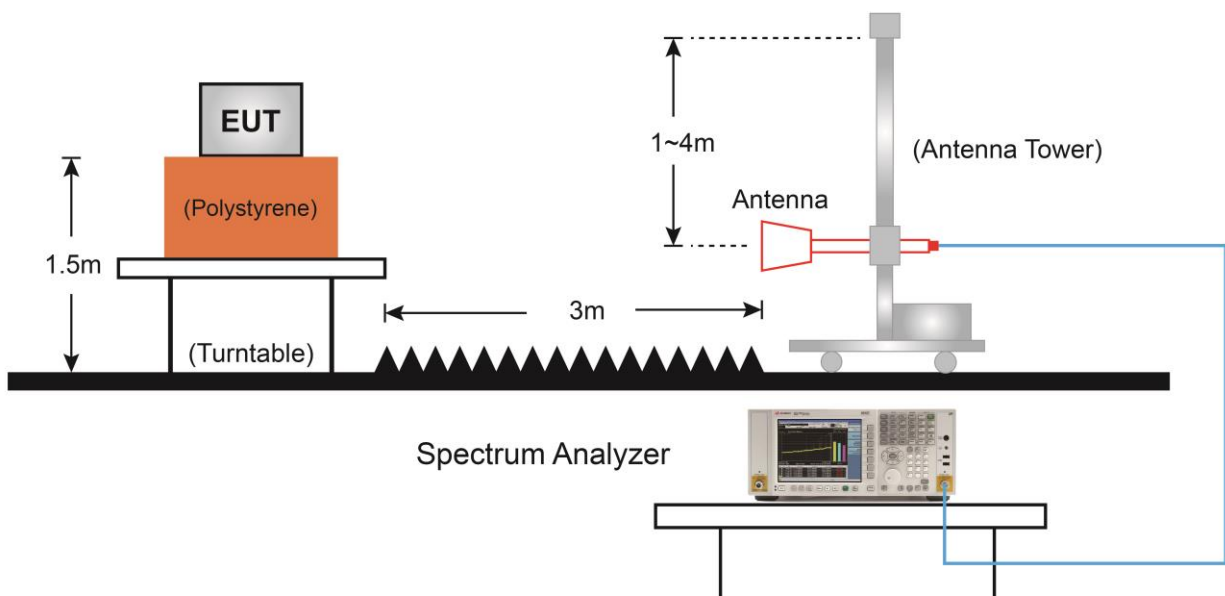

7.7.5. Test Result

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

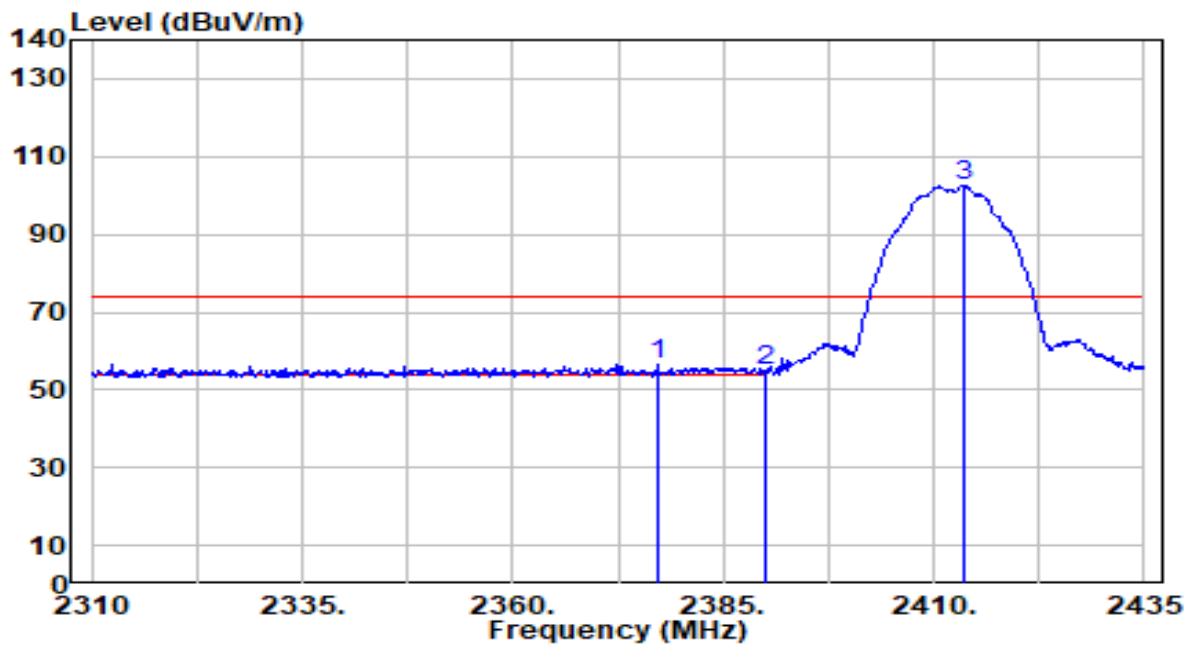


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2377.125	26.58	29.98	56.56	-17.44	74.00	173	246	Peak
2	2390.000	24.69	29.99	54.69	-19.31	74.00	173	246	Peak
3	2413.500	72.45	30.05	102.50	N/A	N/A	173	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

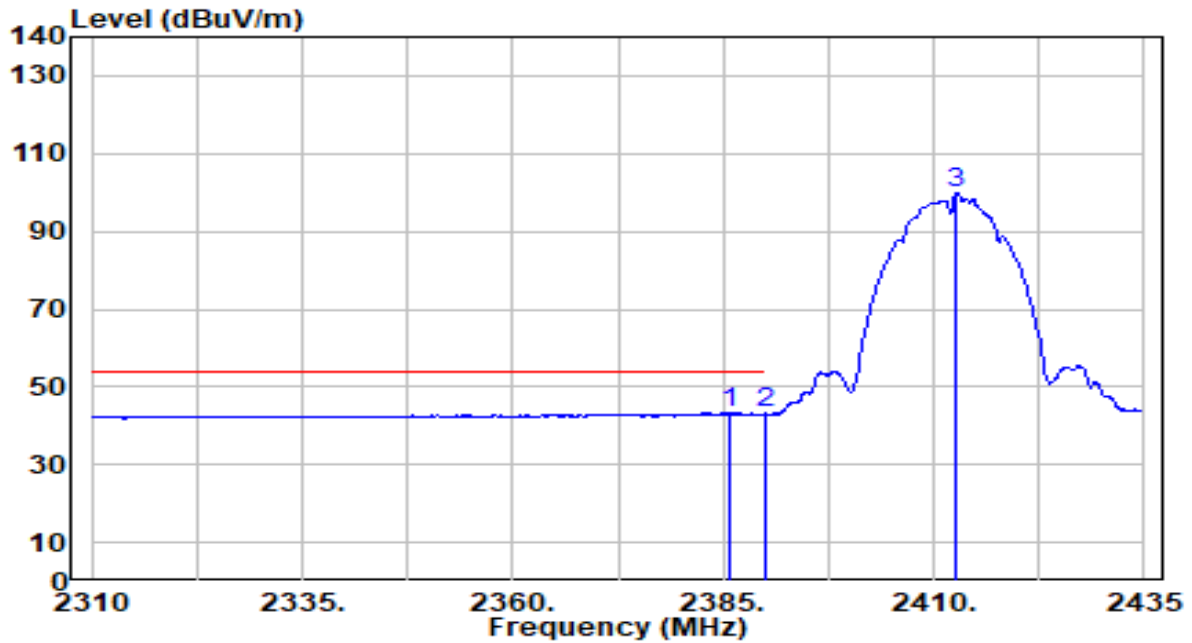


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.875	13.26	29.99	43.25	-10.75	54.00	173	246	Average
2		2390.000	13.07	29.99	43.06	-10.94	54.00	173	246	Average
3		2412.750	69.82	30.05	99.87	N/A	N/A	173	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

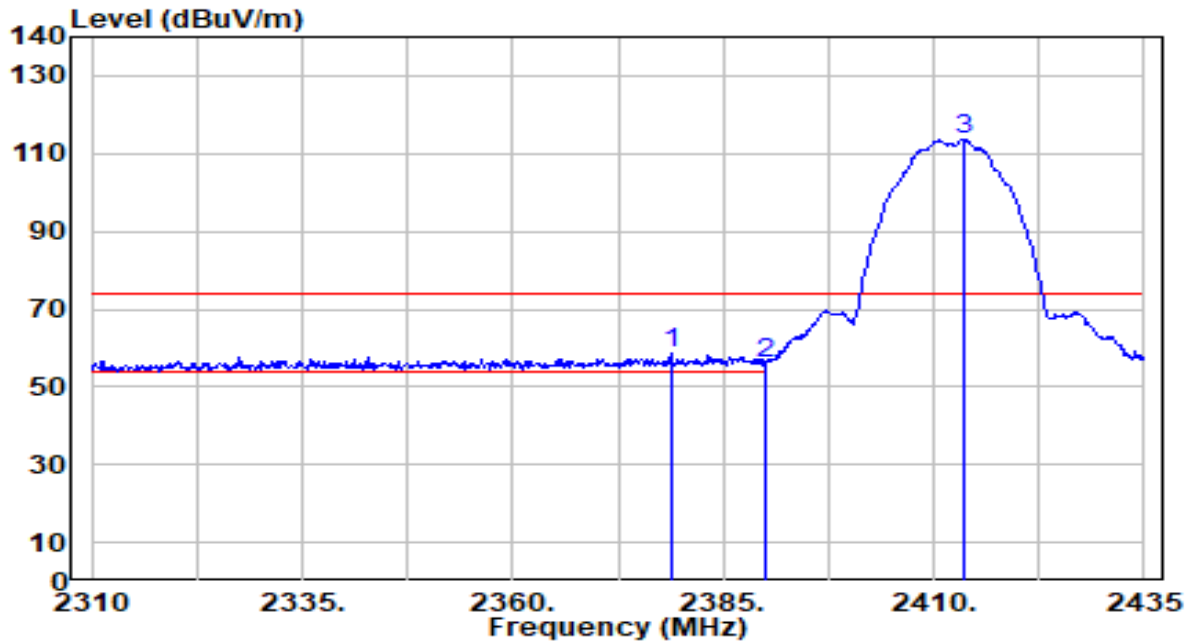


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2378.750	28.57	29.98	58.55	-15.45	74.00	129	283	Peak
2		2390.000	25.99	29.99	55.99	-18.01	74.00	129	283	Peak
3		2413.500	83.55	30.05	113.61	N/A	N/A	129	283	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

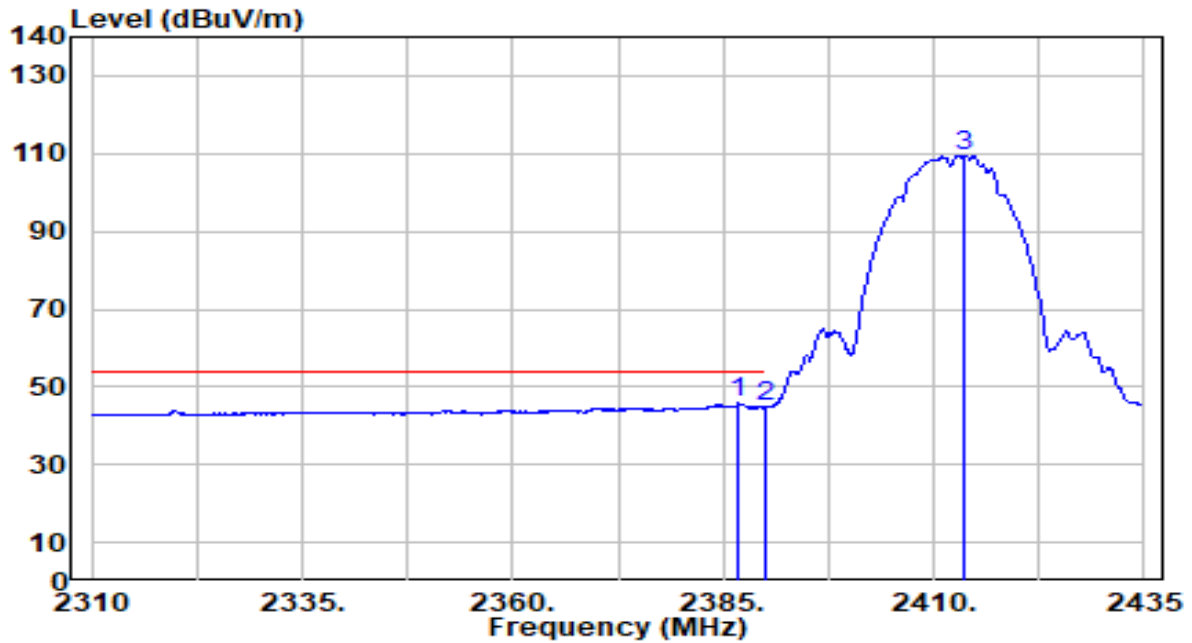


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.875	15.78	29.99	45.77	-8.23	54.00	129	283	Average
2		2390.000	14.69	29.99	44.68	-9.32	54.00	129	283	Average
3		2413.750	79.50	30.05	109.56	N/A	N/A	129	283	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

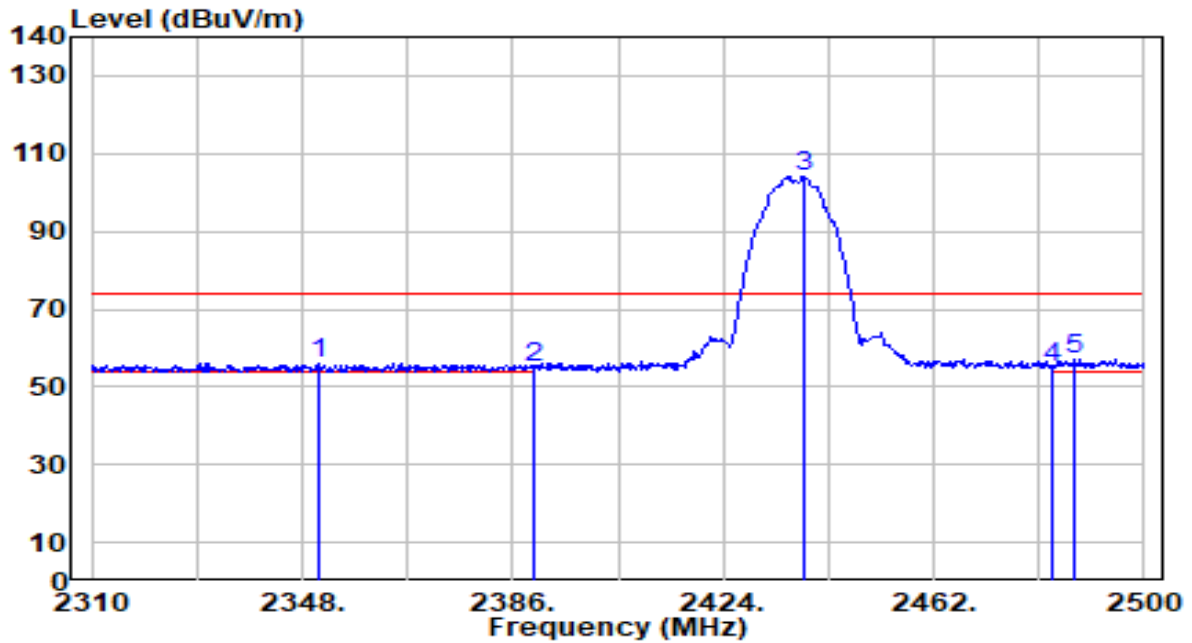


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2350.850	25.99	29.94	55.93	-18.07	74.00	141	255	Peak
2	2390.000	24.77	29.99	54.76	-19.24	74.00	141	255	Peak
3	2438.440	73.91	30.14	104.05	N/A	N/A	141	255	Peak
4	2483.500	24.59	30.29	54.88	-19.12	74.00	141	255	Peak
5	* 2487.460	27.02	30.30	57.32	-16.68	74.00	141	255	Peak

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

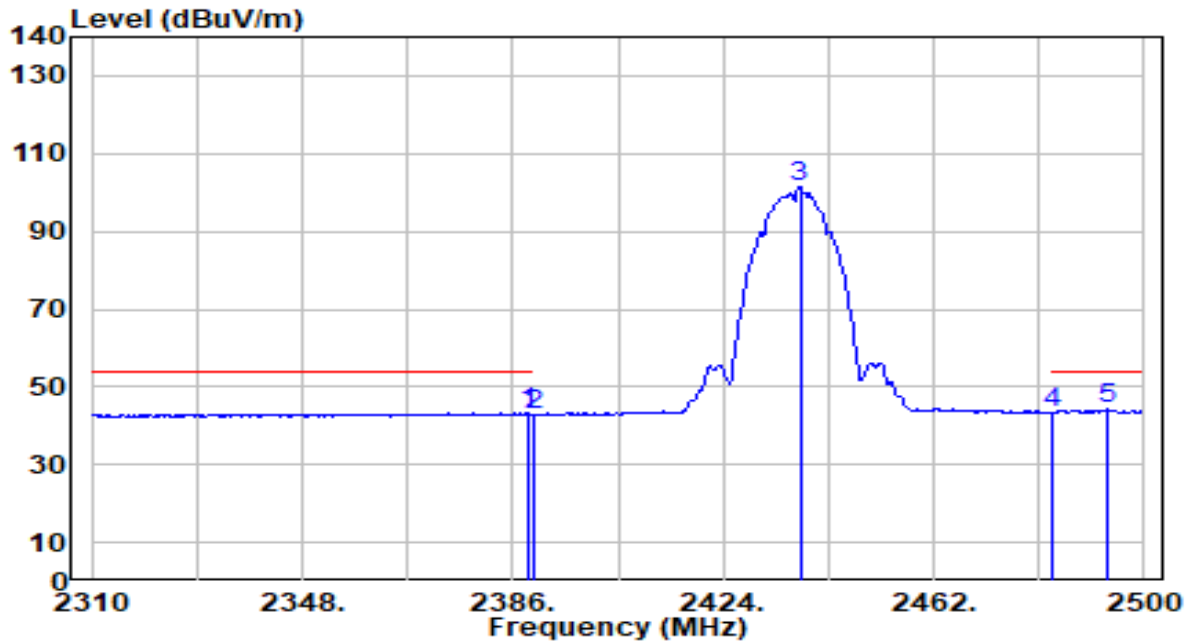


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	13.11	29.99	43.10	-10.90	54.00	141	255	Average
2	2390.000	13.04	29.99	43.03	-10.97	54.00	141	255	Average
3	2437.870	71.27	30.13	101.40	N/A	N/A	141	255	Average
4	2483.500	13.26	30.29	43.55	-10.45	54.00	141	255	Average
5	* 2493.350	13.84	30.32	44.16	-9.84	54.00	141	255	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

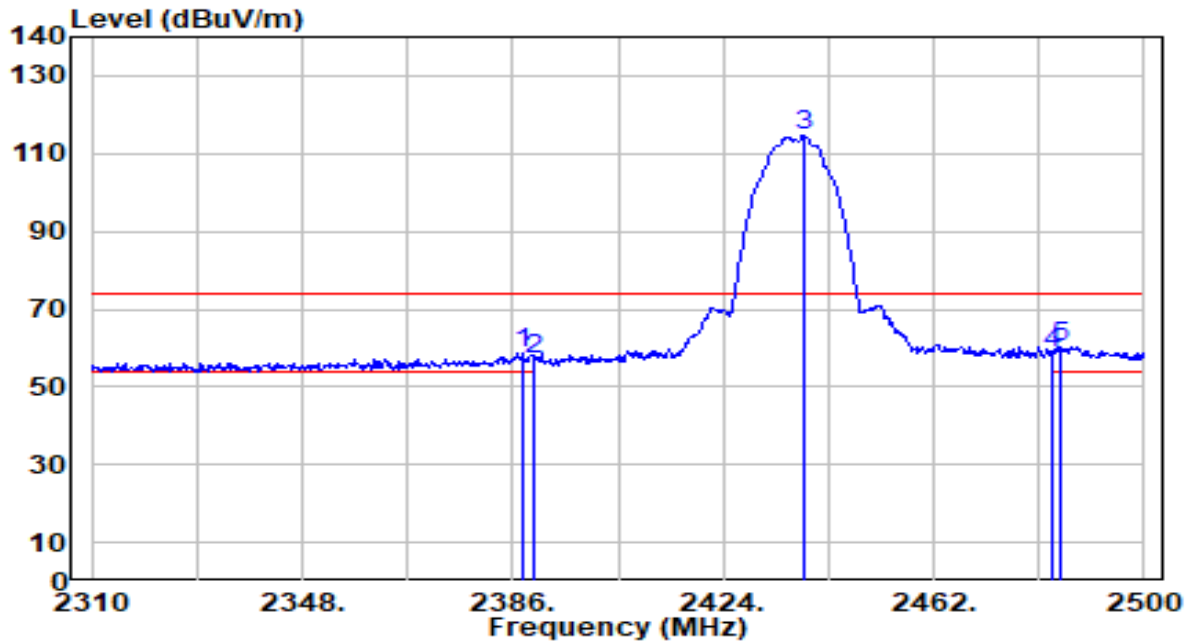


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	28.63	29.99	58.62	-15.38	74.00	153	276	Peak
2	2390.000	26.93	29.99	56.92	-17.08	74.00	153	276	Peak
3	2438.440	84.34	30.14	114.47	N/A	N/A	153	276	Peak
4	2483.500	28.48	30.29	58.77	-15.23	74.00	153	276	Peak
5	* 2484.990	30.15	30.29	60.44	-13.56	74.00	153	276	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

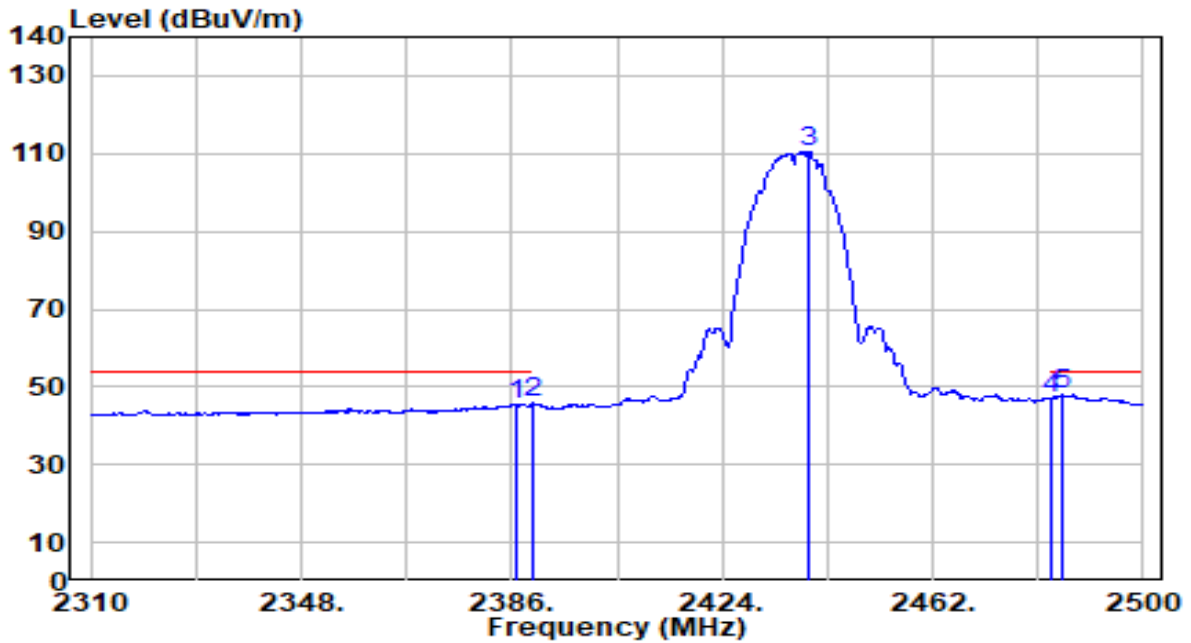


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	15.42	29.99	45.41	-8.59	54.00	153	276	Average
2	2390.000	15.82	29.99	45.82	-8.18	54.00	153	276	Average
3	2439.770	80.26	30.14	110.40	N/A	N/A	153	276	Average
4	2483.500	16.81	30.29	47.09	-6.91	54.00	153	276	Average
5	* 2485.560	17.59	30.29	47.88	-6.12	54.00	153	276	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

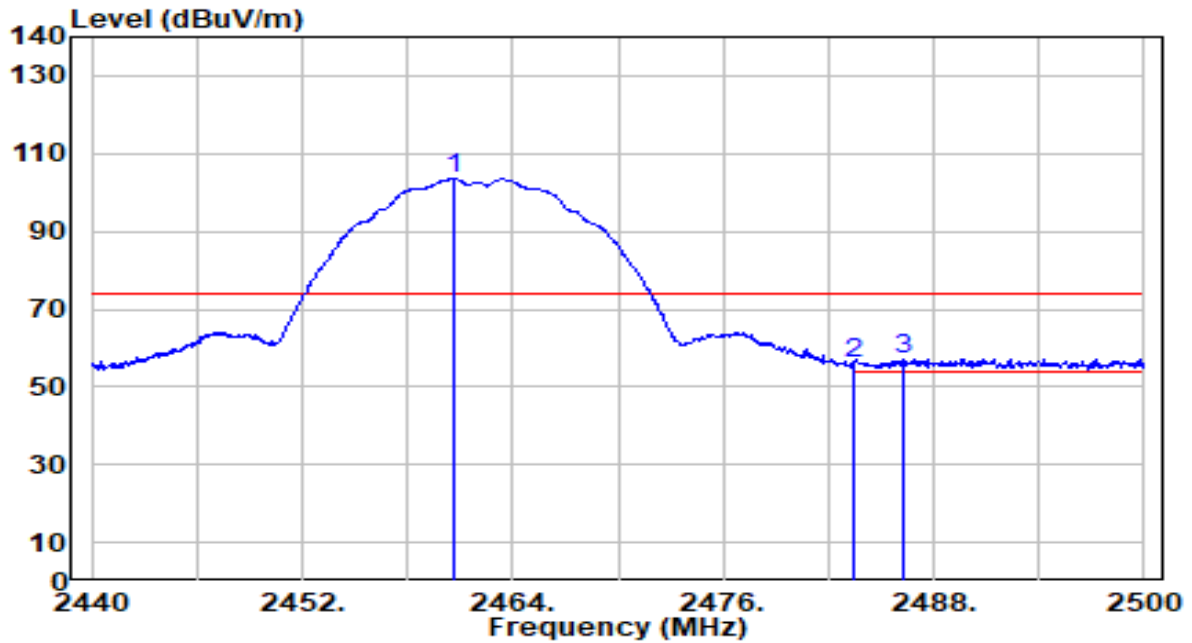


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	73.27	30.21	103.48	N/A	N/A	167	285	Peak
2	2483.500	25.84	30.29	56.12	-17.88	74.00	167	285	Peak
3	* 2486.200	26.84	30.29	57.14	-16.86	74.00	167	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

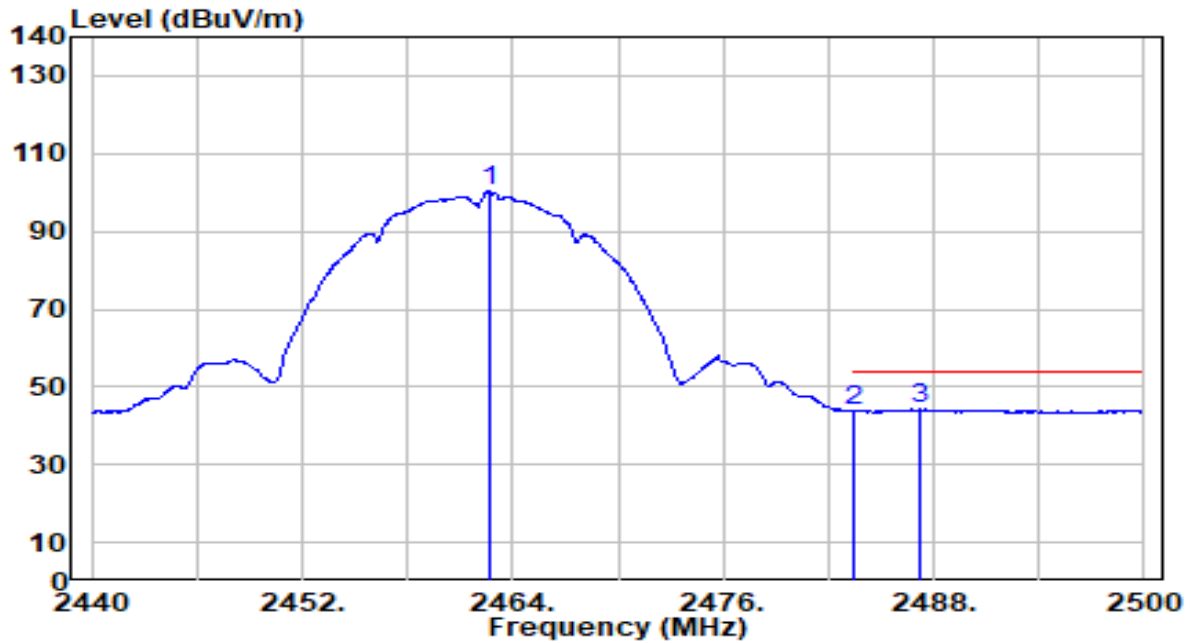


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	70.39	30.22	100.60	N/A	N/A	167	285	Average
2	2483.500	13.47	30.29	43.75	-10.25	54.00	167	285	Average
3	* 2487.280	13.85	30.30	44.15	-9.85	54.00	167	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

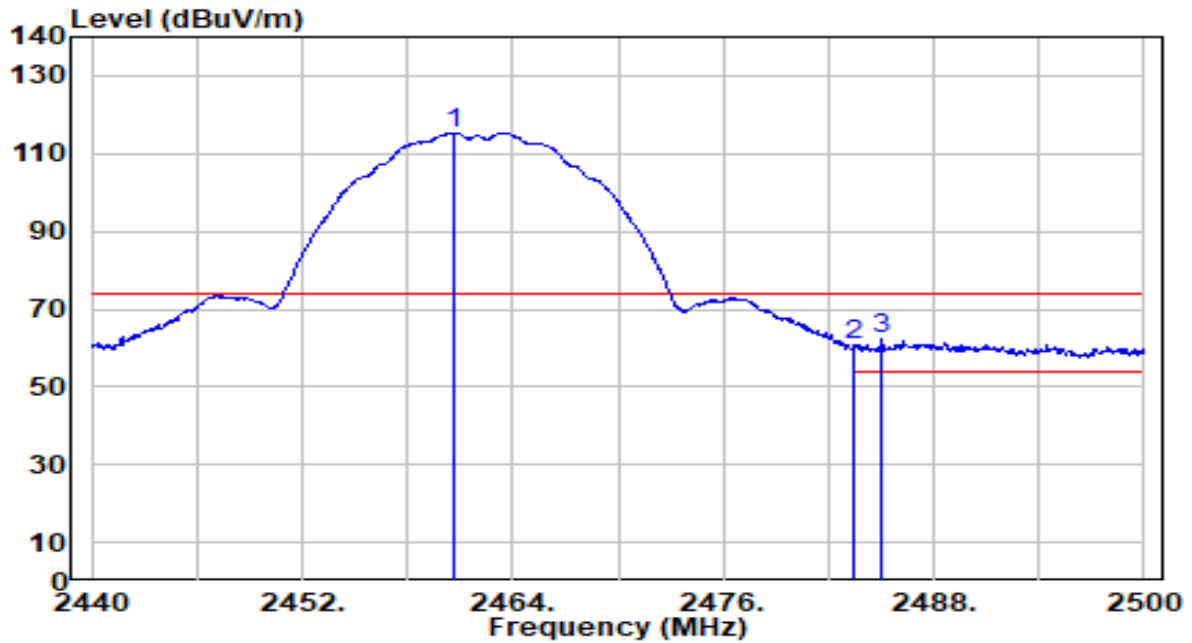


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	85.08	30.21	115.29	N/A	N/A	100	60	Peak
2	2483.500	30.71	30.29	60.99	-13.01	74.00	100	60	Peak
3	* 2485.060	31.88	30.29	62.18	-11.82	74.00	100	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

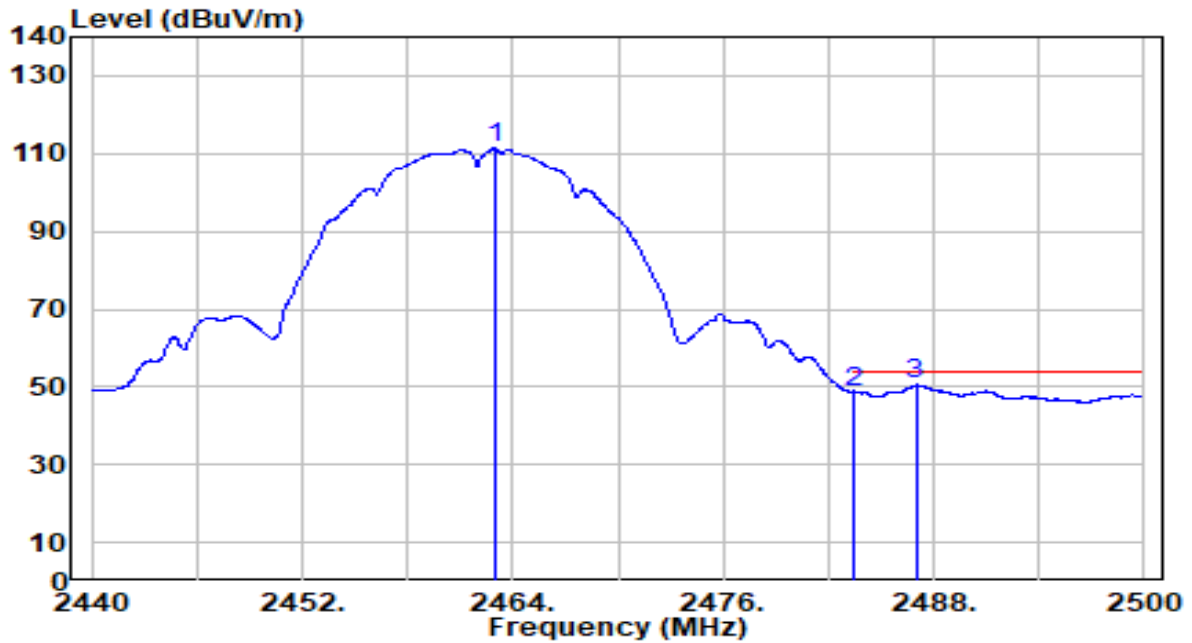


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.980	81.29	30.22	111.51	N/A	N/A	100	60	Average
2	2483.500	18.53	30.29	48.81	-5.19	54.00	100	60	Average
3	* 2486.980	20.26	30.30	50.56	-3.44	54.00	100	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

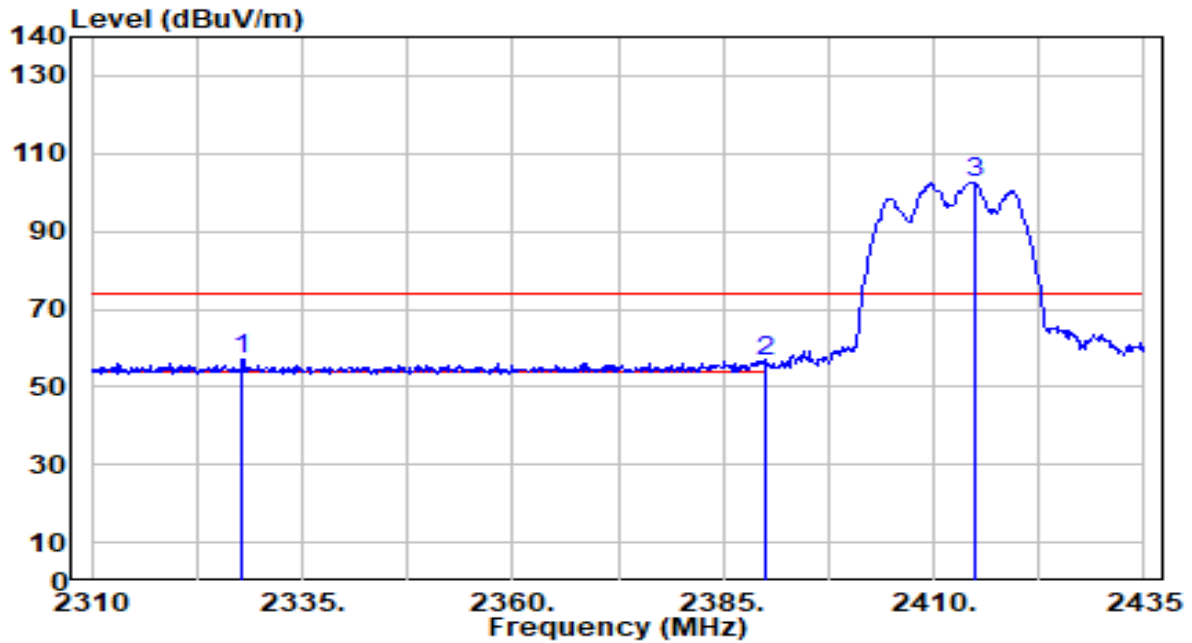


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2327.875	27.02	29.91	56.94	-17.06	74.00	100	229	Peak
2		2390.000	26.56	29.99	56.56	-17.44	74.00	100	229	Peak
3		2414.875	72.69	30.06	102.75	N/A	N/A	100	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

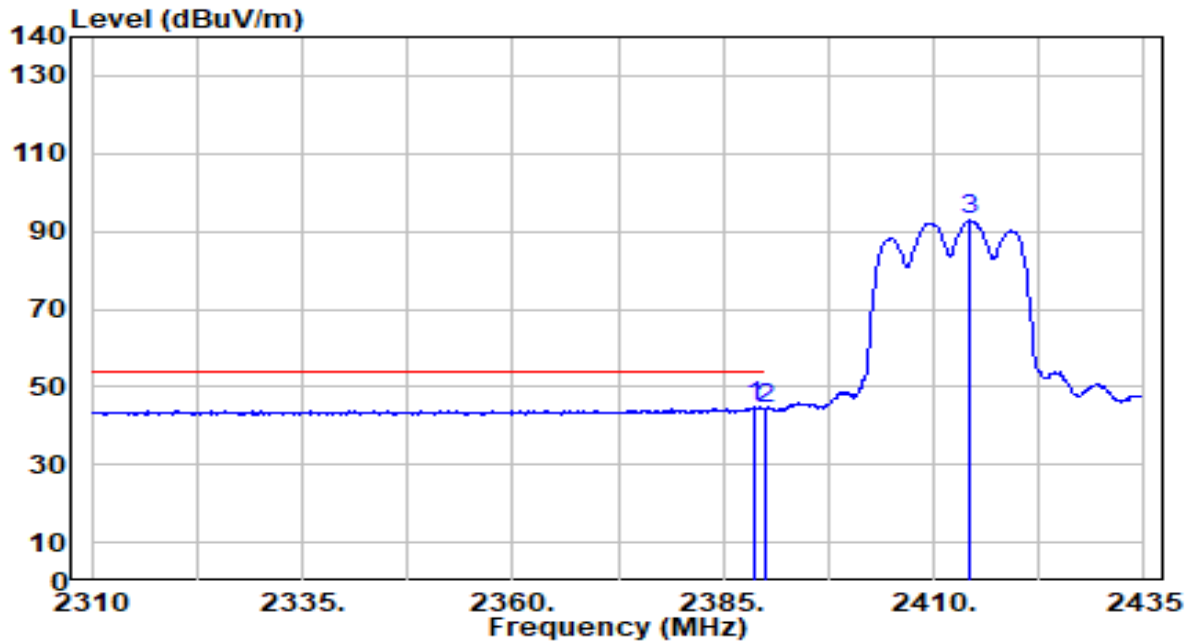


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.750	14.72	29.99	44.72	-9.28	54.00	100	229	Average
2		2390.000	14.38	29.99	44.38	-9.62	54.00	100	229	Average
3		2414.375	62.83	30.06	92.89	N/A	N/A	100	229	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

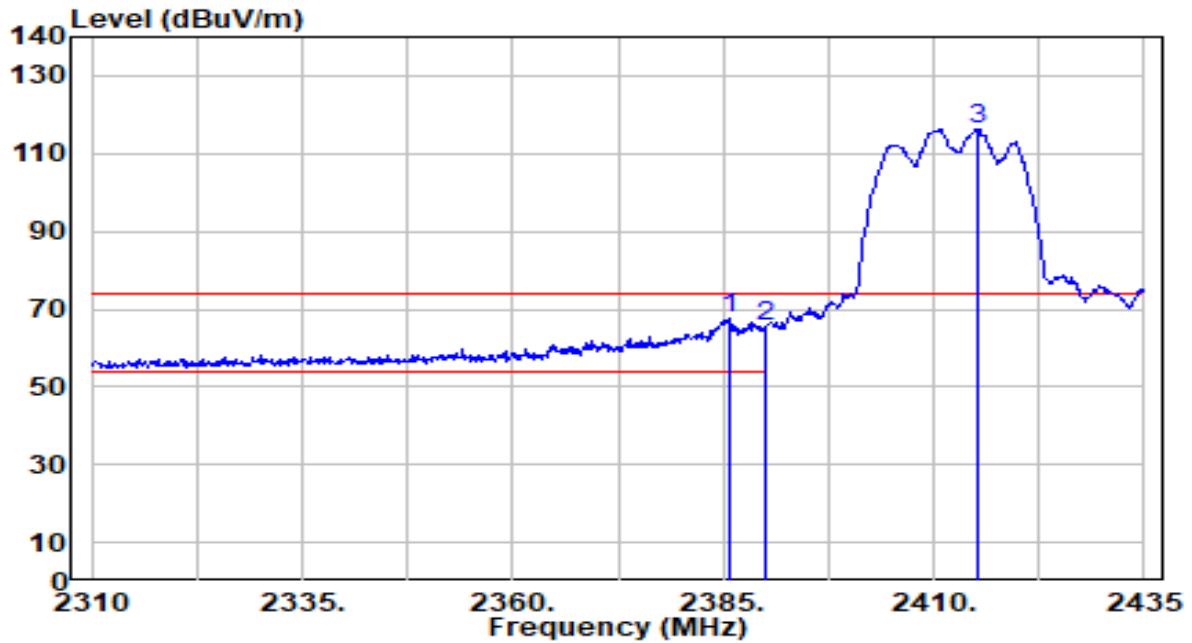


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.625	37.38	29.99	67.37	-6.63	74.00	140	234	Peak
2		2390.000	35.76	29.99	65.75	-8.25	74.00	140	234	Peak
3		2415.125	86.14	30.06	116.20	N/A	N/A	140	234	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

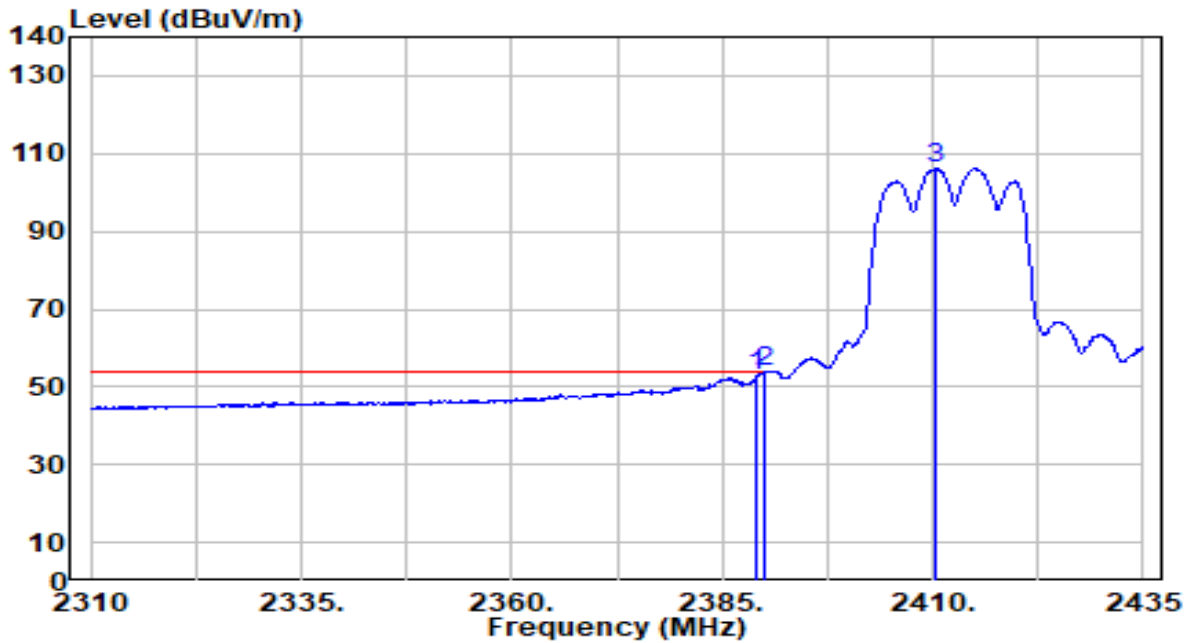


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	22.58	29.99	52.57	-1.43	54.00	140	234	Average
2	* 2390.000	23.84	29.99	53.84	-0.16	54.00	140	234	Average
3	2410.375	76.10	30.04	106.15	N/A	N/A	140	234	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

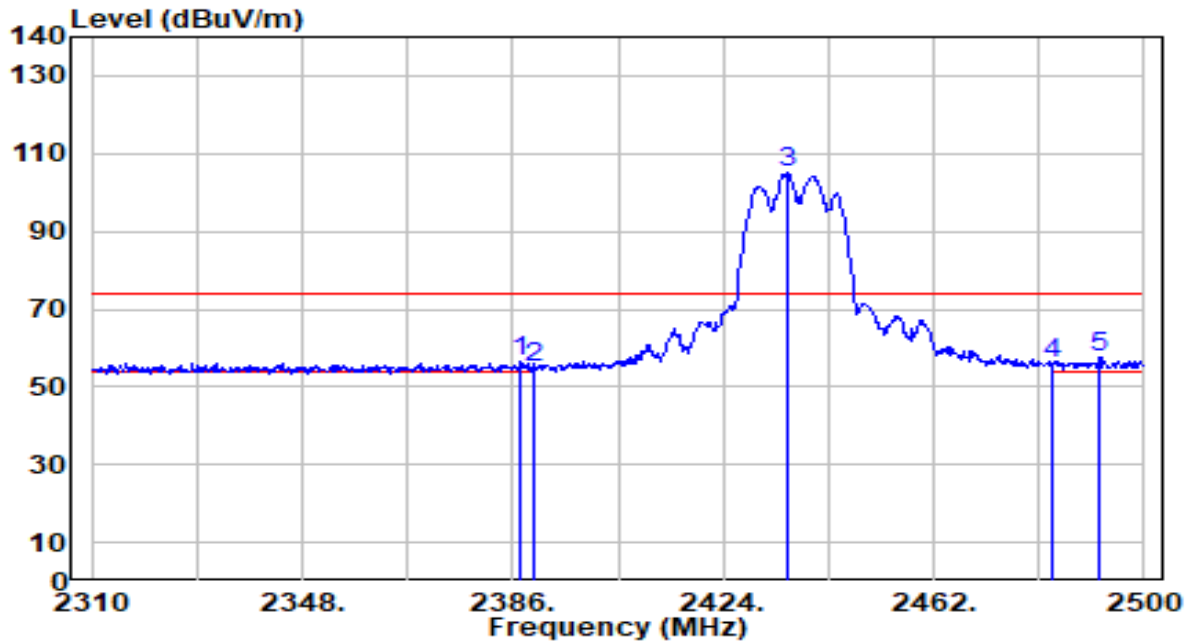


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	26.33	29.99	56.32	-17.68	74.00	100	360	Peak
2	2390.000	24.73	29.99	54.72	-19.28	74.00	100	360	Peak
3	2435.780	74.99	30.13	105.11	N/A	N/A	100	360	Peak
4	2483.500	25.91	30.29	56.20	-17.80	74.00	100	360	Peak
5	* 2492.020	27.25	30.31	57.56	-16.44	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

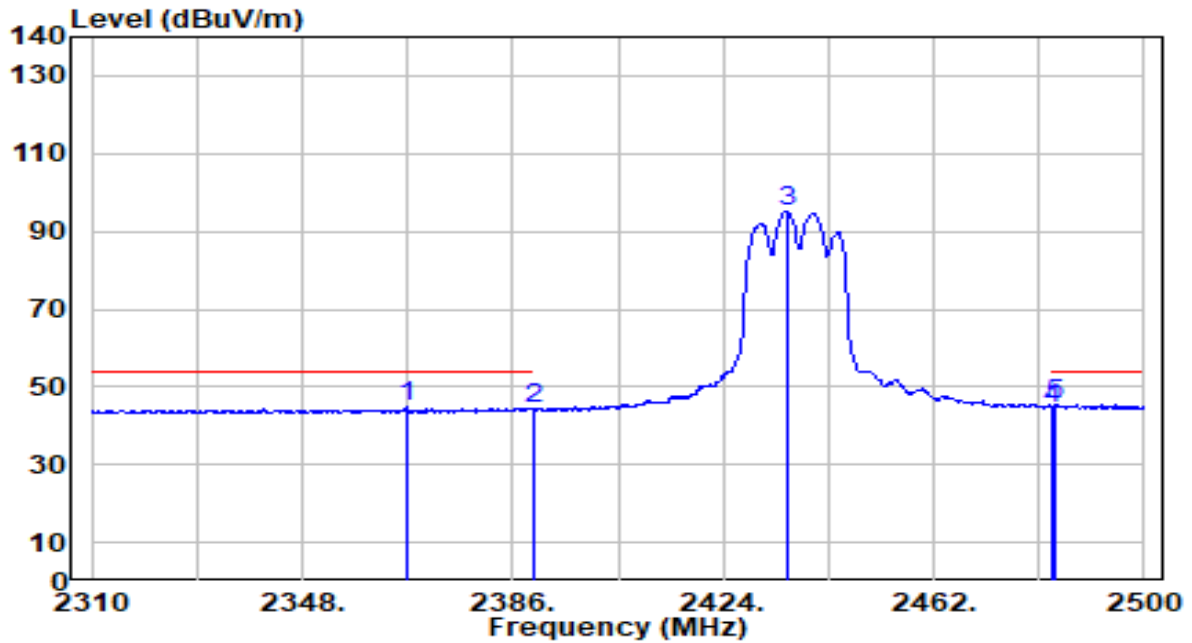


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2366.810	14.77	29.96	44.74	-9.26	54.00	100	360	Average
2	2390.000	14.22	29.99	44.21	-9.79	54.00	100	360	Average
3	2435.400	64.96	30.13	95.08	N/A	N/A	100	360	Average
4	2483.500	14.27	30.29	44.55	-9.45	54.00	100	360	Average
5	* 2484.040	15.02	30.29	45.31	-8.69	54.00	100	360	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

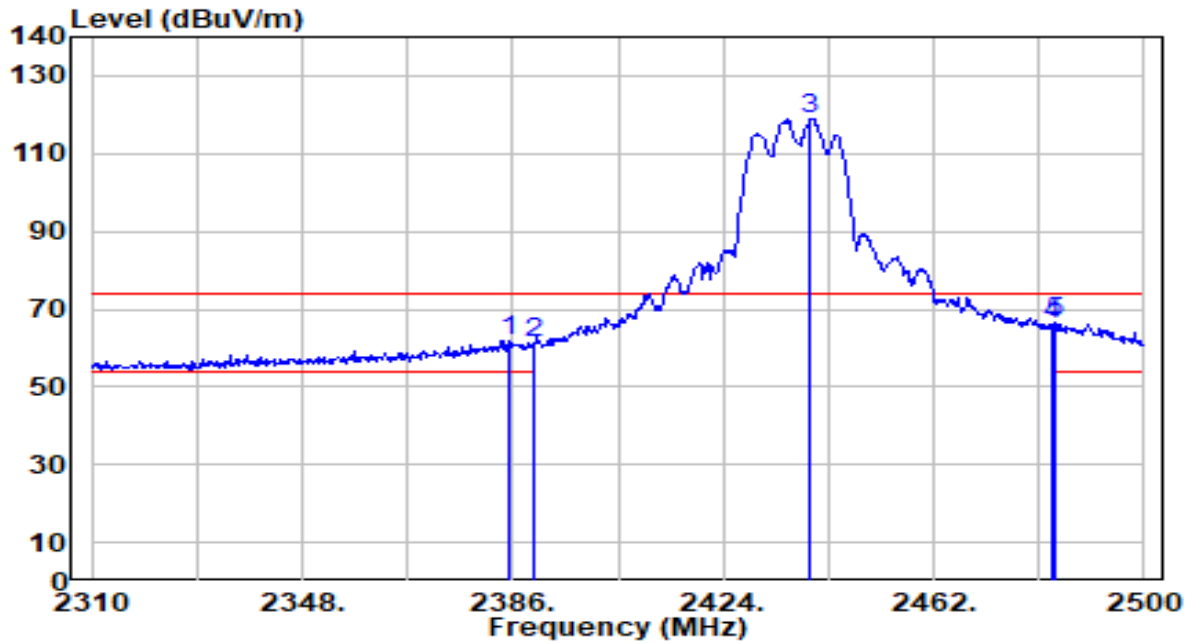


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	31.69	29.99	61.68	-12.32	74.00	172	234	Peak
2	2390.000	31.18	29.99	61.17	-12.83	74.00	172	234	Peak
3	2439.770	88.51	30.14	118.65	N/A	N/A	172	234	Peak
4	2483.500	35.72	30.29	66.00	-8.00	74.00	172	234	Peak
5	* 2484.040	36.02	30.29	66.31	-7.69	74.00	172	234	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

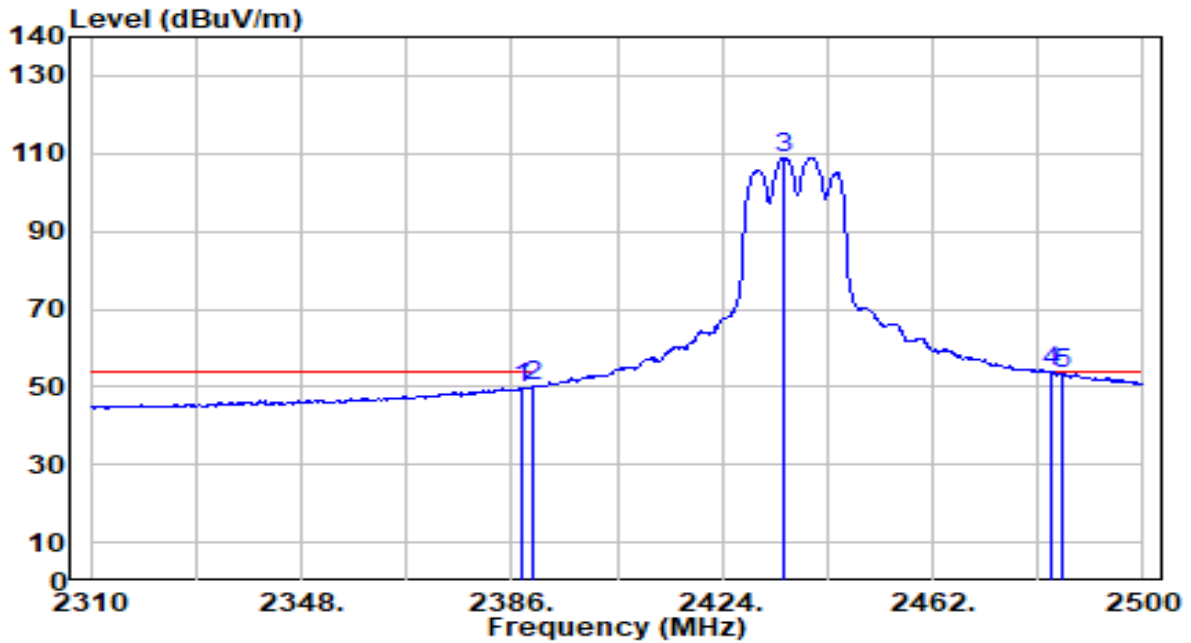


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	19.87	29.99	49.86	-4.14	54.00	172	234	Average
2	2390.000	20.13	29.99	50.13	-3.87	54.00	172	234	Average
3	2435.210	78.91	30.12	109.03	N/A	N/A	172	234	Average
4	* 2483.500	23.56	30.29	53.85	-0.15	54.00	172	234	Average
5	2485.180	23.28	30.29	53.57	-0.43	54.00	172	234	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

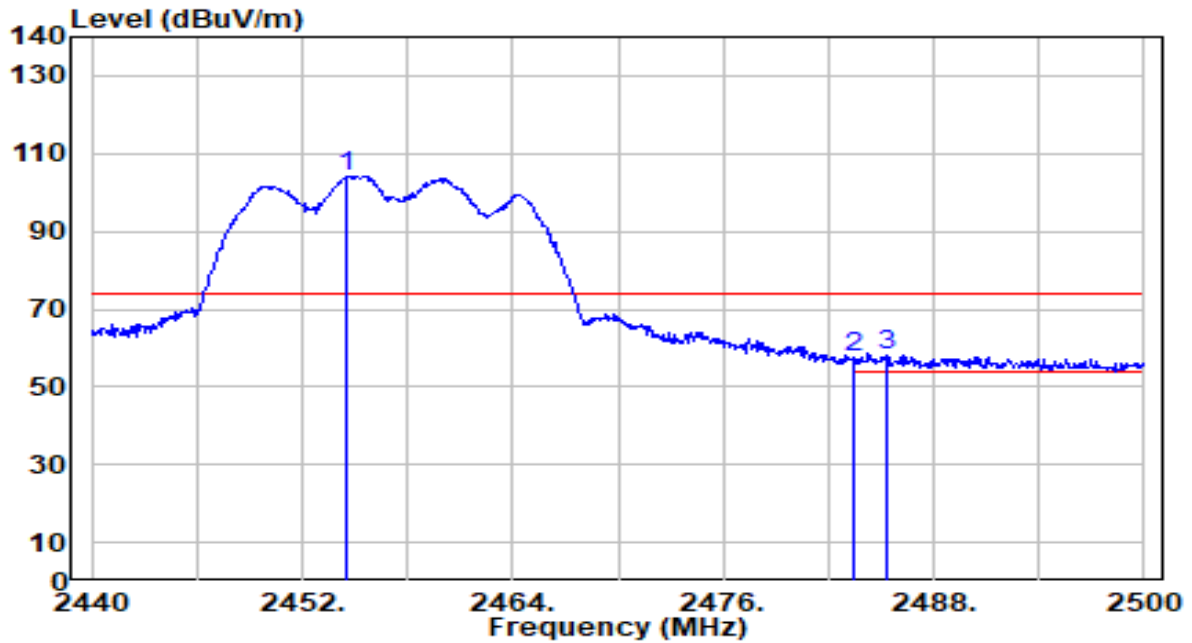


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.520	73.93	30.19	104.12	N/A	N/A	100	220	Peak
2	2483.500	27.35	30.29	57.64	-16.36	74.00	100	220	Peak
3	* 2485.300	28.08	30.29	58.37	-15.63	74.00	100	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

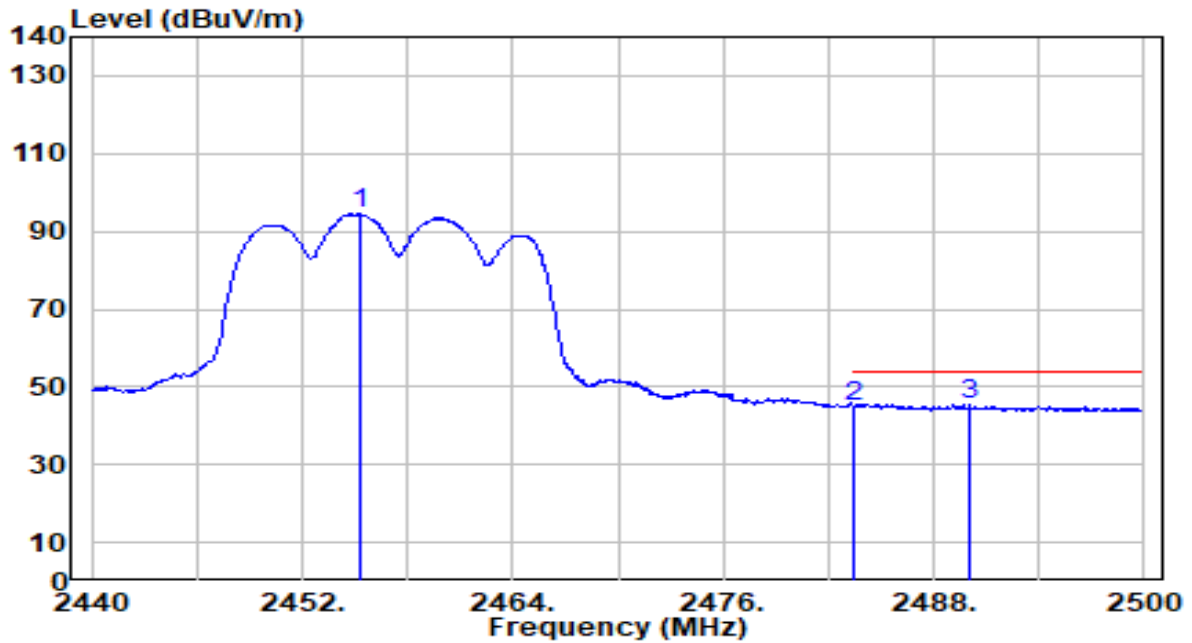


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.300	64.32	30.19	94.51	N/A	N/A	100	220	Average
2	2483.500	14.85	30.29	45.14	-8.86	54.00	100	220	Average
3	* 2490.040	15.25	30.31	45.56	-8.44	54.00	100	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

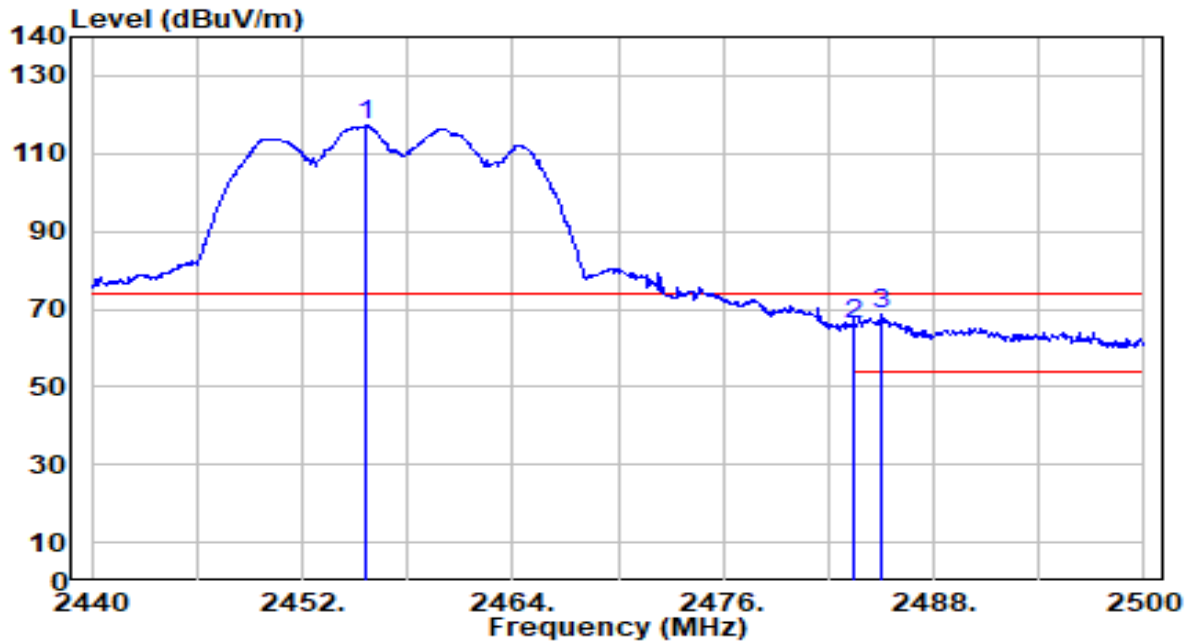


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.660	86.95	30.19	117.14	N/A	N/A	100	180	Peak
2	2483.500	35.91	30.29	66.20	-7.80	74.00	100	180	Peak
3	* 2485.060	38.59	30.29	68.88	-5.12	74.00	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

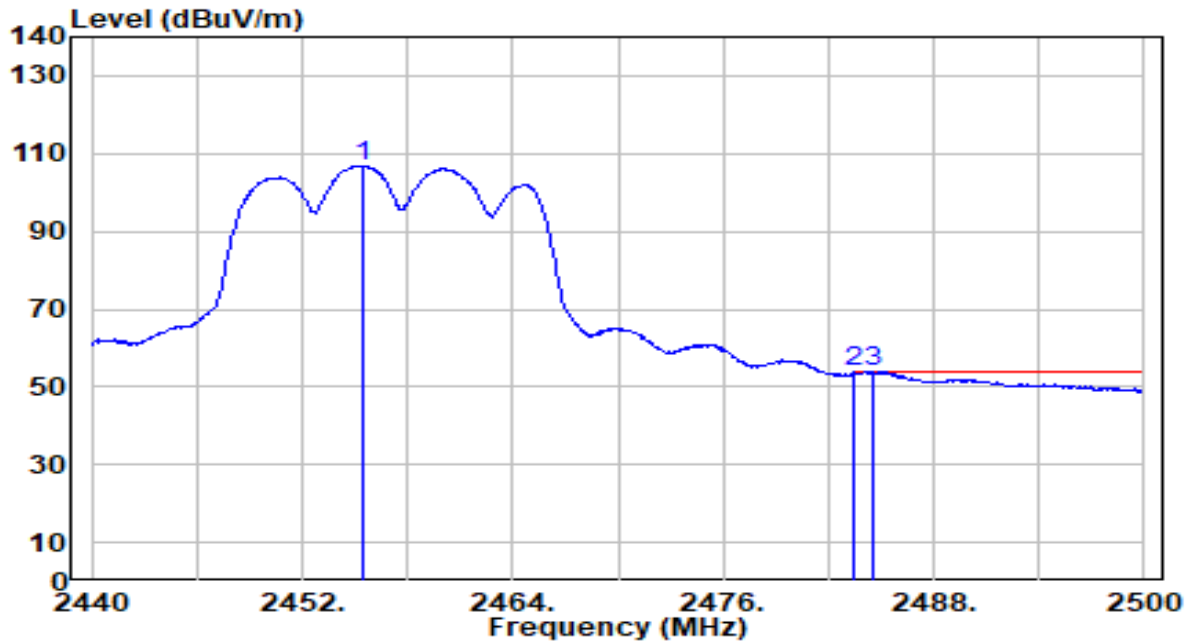


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.480	76.66	30.19	106.86	N/A	N/A	100	180	Average
2	2483.500	23.54	30.29	53.82	-0.18	54.00	100	180	Average
3	* 2484.520	23.60	30.29	53.89	-0.11	54.00	100	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

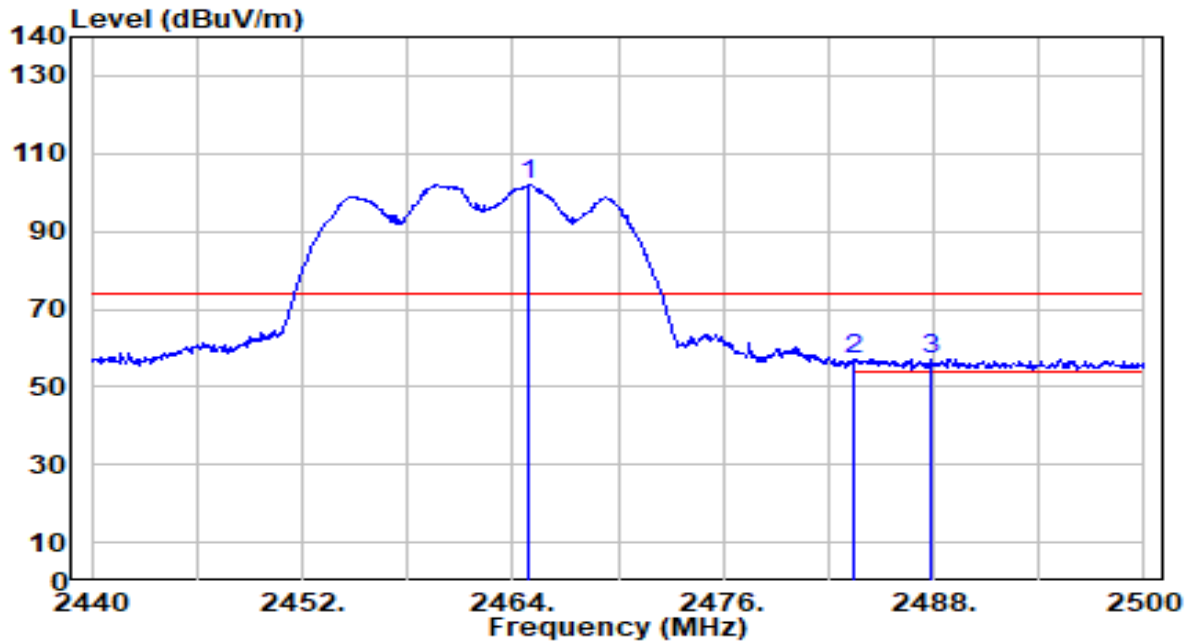


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.960	71.66	30.22	101.88	N/A	N/A	100	310	Peak
2	2483.500	27.00	30.29	57.28	-16.72	74.00	100	310	Peak
3	* 2487.820	27.00	30.30	57.30	-16.70	74.00	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

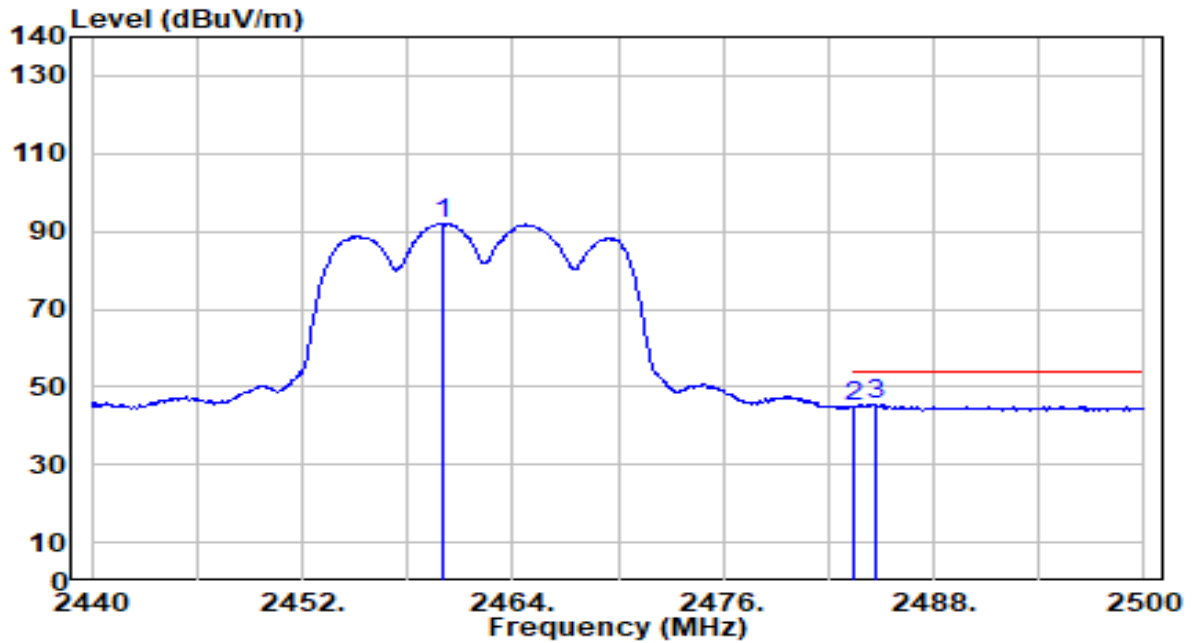


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.980	61.73	30.21	91.93	N/A	N/A	100	310	Average
2	2483.500	14.67	30.29	44.95	-9.05	54.00	100	310	Average
3	* 2484.760	15.03	30.29	45.32	-8.68	54.00	100	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

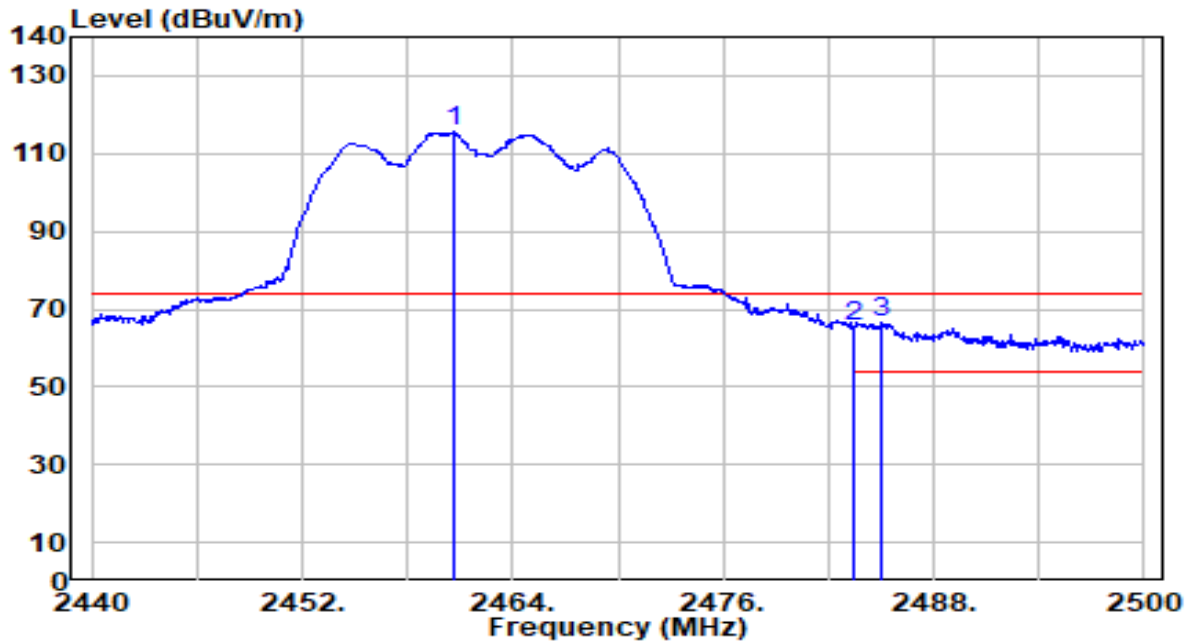


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.700	85.47	30.21	115.68	N/A	N/A	153	236	Peak
2	2483.500	35.20	30.29	65.49	-8.51	74.00	153	236	Peak
3	* 2485.000	36.21	30.29	66.50	-7.50	74.00	153	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

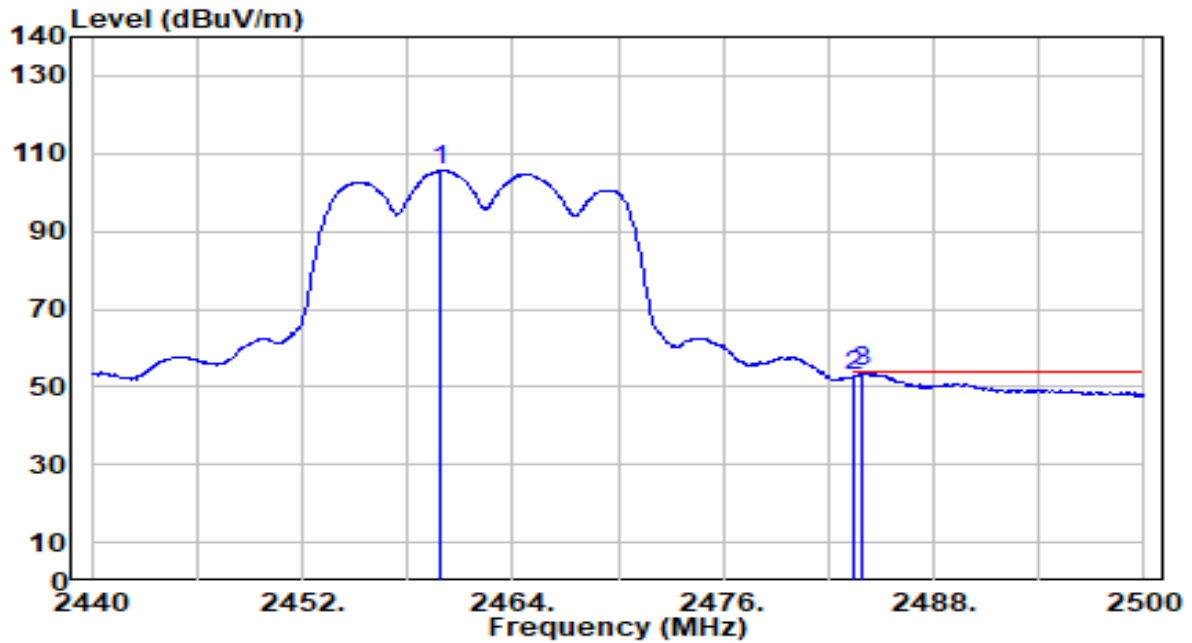


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.800	75.33	30.21	105.54	N/A	N/A	153	236	Average
2	2483.500	22.30	30.29	52.58	-1.42	54.00	153	236	Average
3	* 2483.980	23.53	30.29	53.82	-0.18	54.00	153	236	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

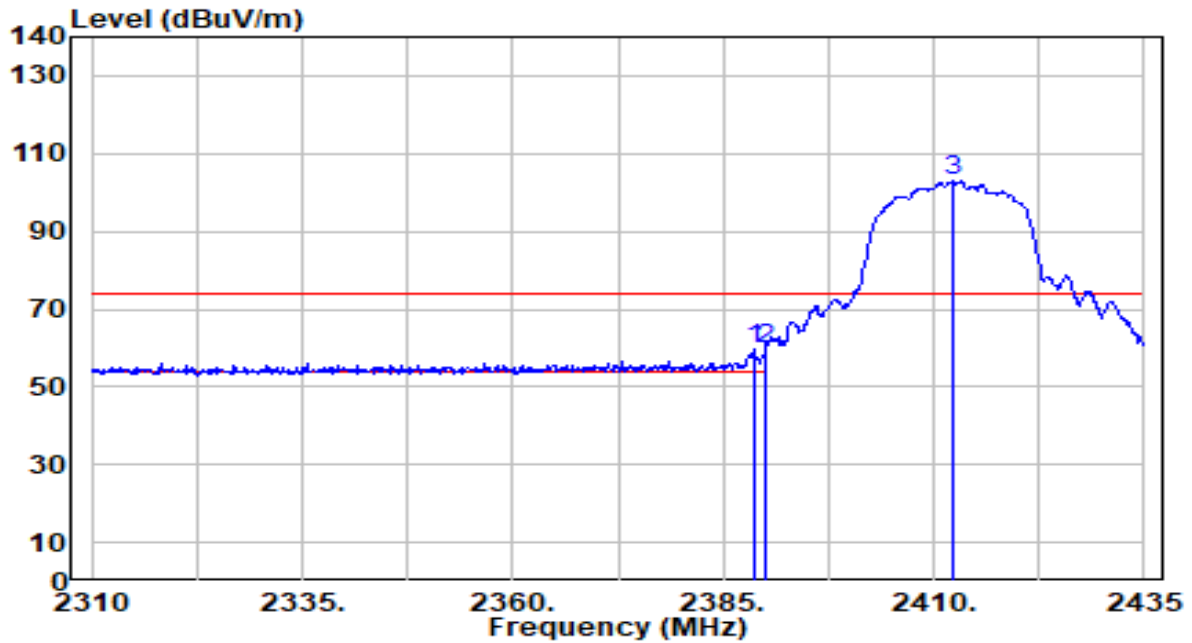


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.625	29.52	29.99	59.51	-14.49	74.00	100	232	Peak
2	* 2390.000	29.92	29.99	59.92	-14.08	74.00	100	232	Peak
3	2412.250	72.80	30.05	102.85	N/A	N/A	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

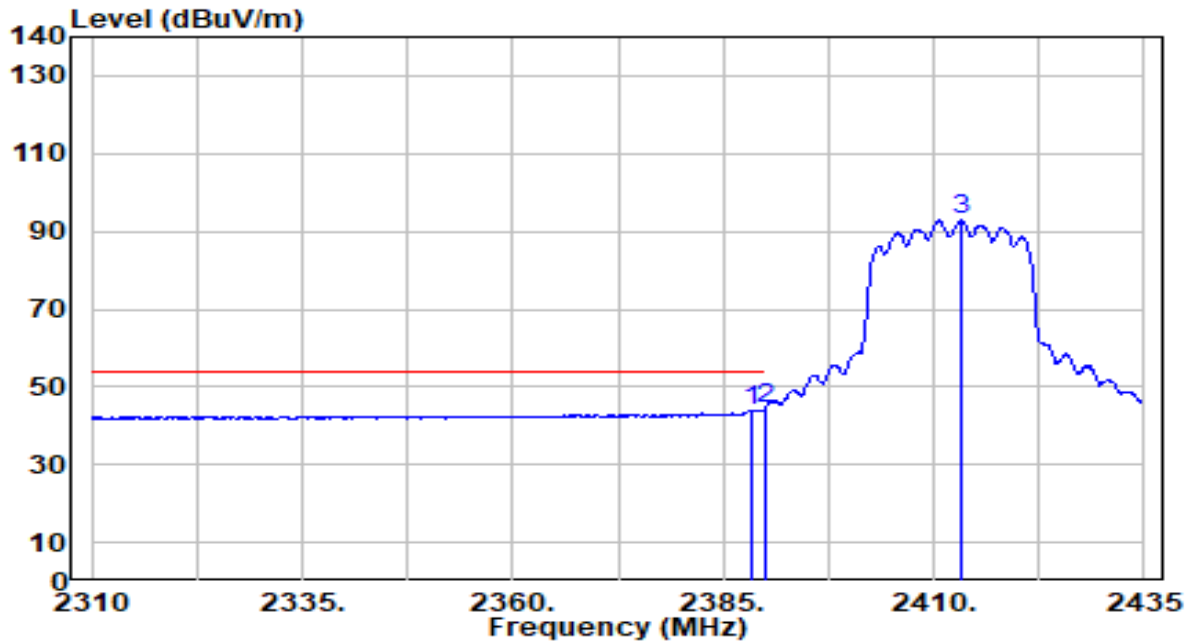


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.500	13.95	29.99	43.94	-10.06	54.00	100	232	Average
2	* 2390.000	14.51	29.99	44.51	-9.49	54.00	100	232	Average
3	2413.375	62.75	30.05	92.80	N/A	N/A	100	232	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

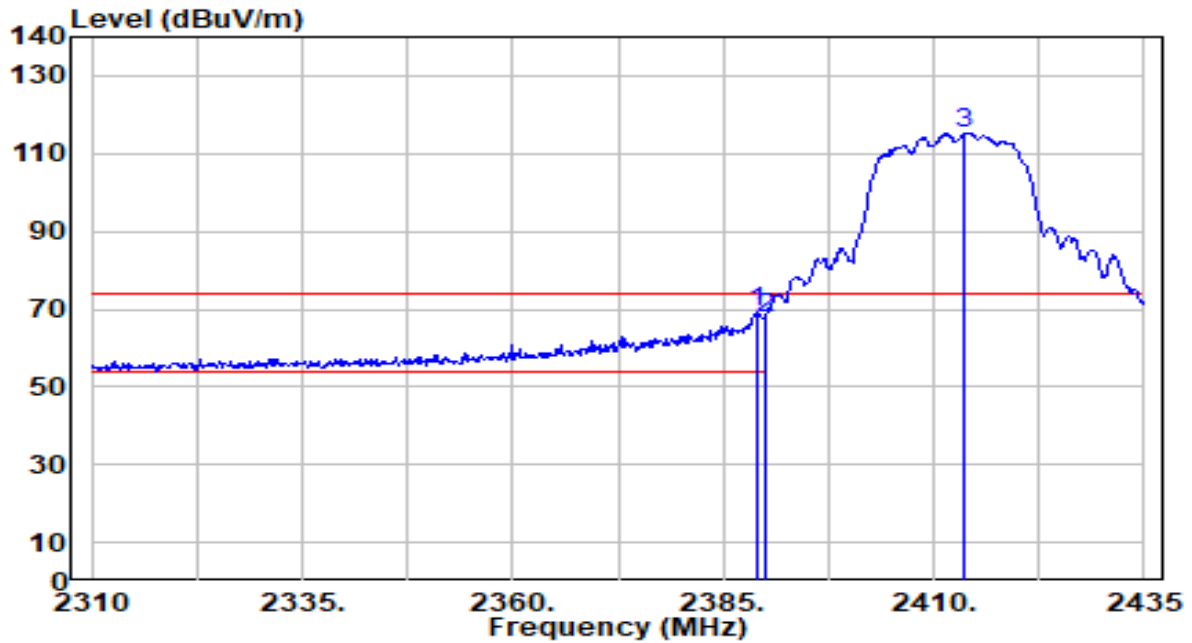


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.000	39.00	29.99	69.00	-5.00	74.00	102	179	Peak
2		2390.000	37.84	29.99	67.84	-6.16	74.00	102	179	Peak
3		2413.750	85.21	30.05	115.27	N/A	N/A	102	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

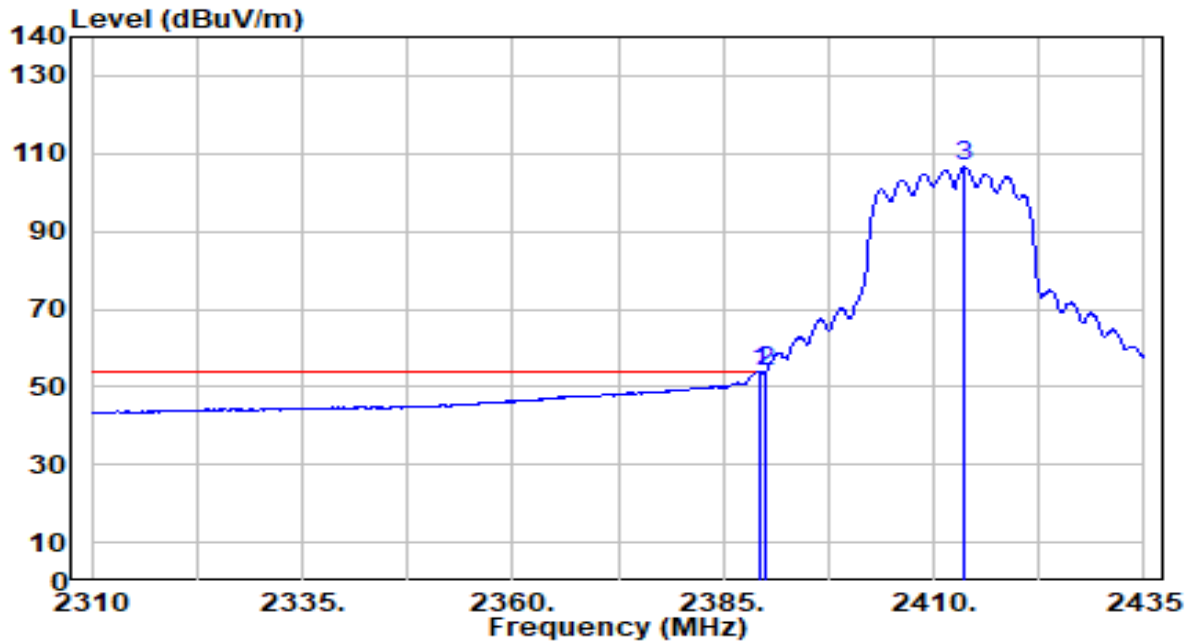


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.250	23.87	29.99	53.86	-0.14	54.00	102	179	Average
2		2390.000	23.67	29.99	53.66	-0.34	54.00	102	179	Average
3		2413.625	76.69	30.05	106.75	N/A	N/A	102	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

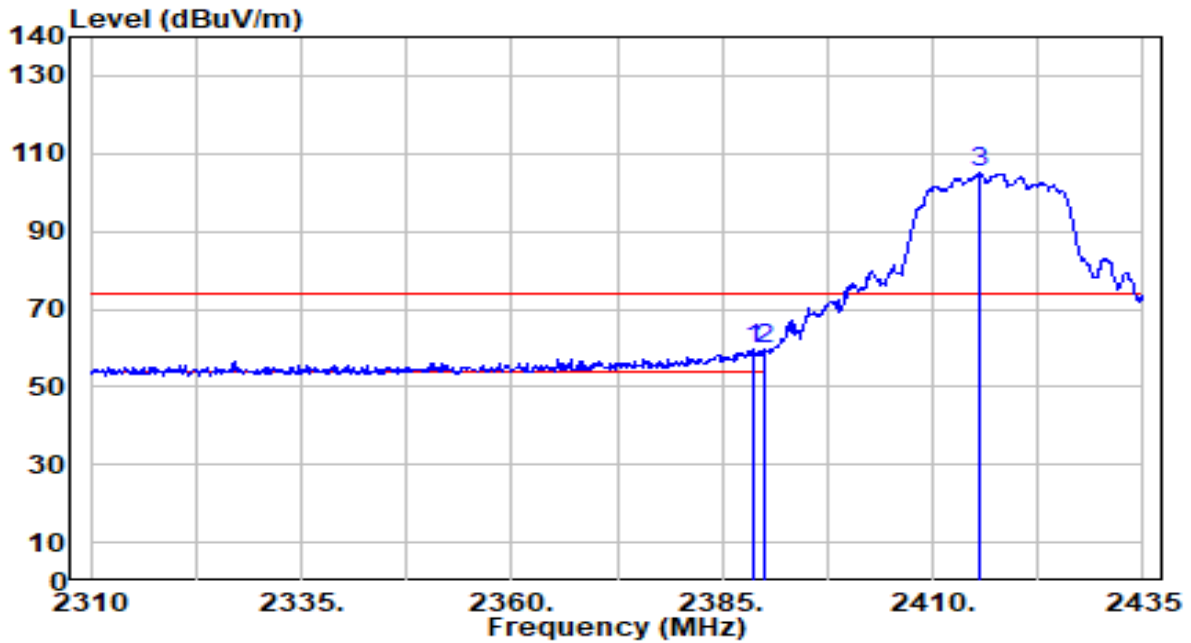


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.625	29.45	29.99	59.44	-14.56	74.00	100	120	Peak
2	* 2390.000	29.82	29.99	59.81	-14.19	74.00	100	120	Peak
3	2415.500	74.81	30.06	104.87	N/A	N/A	100	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

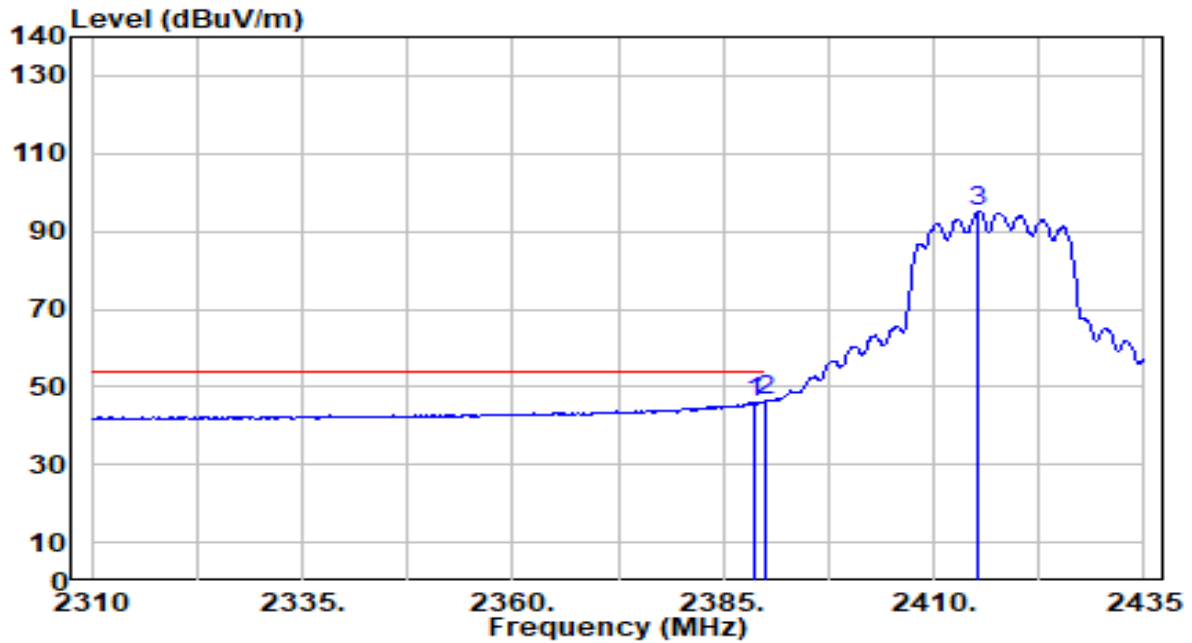


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.625	15.92	29.99	45.91	-8.09	54.00	100	120	Average
2	* 2390.000	16.31	29.99	46.31	-7.69	54.00	100	120	Average
3	2415.375	65.19	30.06	95.25	N/A	N/A	100	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

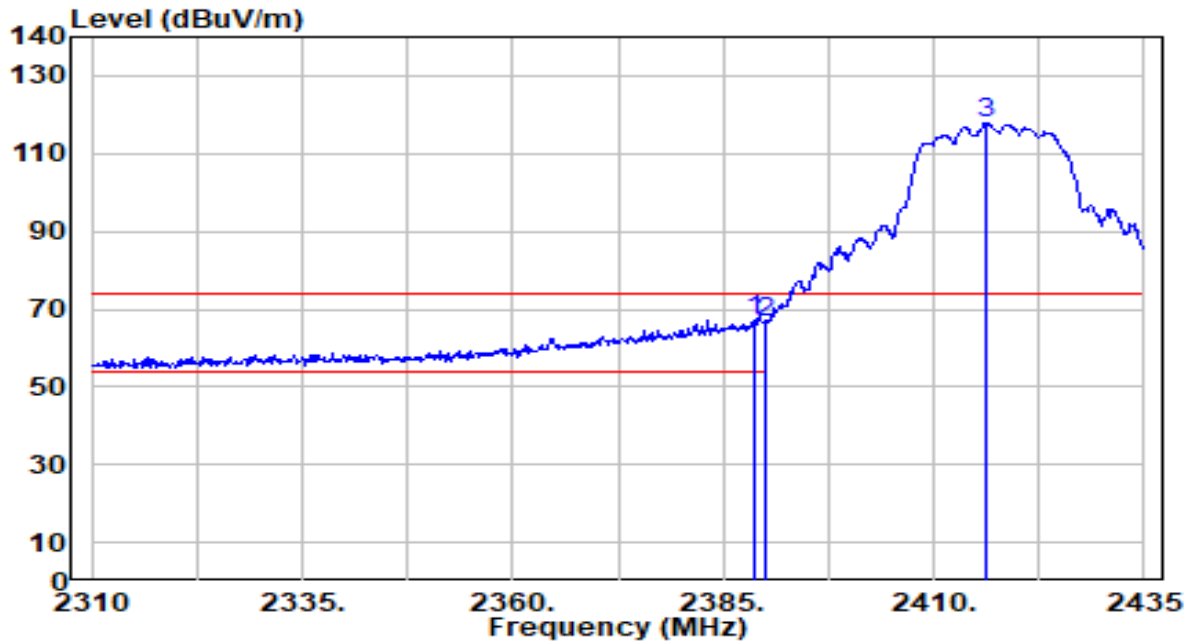


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.750	37.19	29.99	67.18	-6.82	74.00	100	181	Peak
2		2390.000	36.38	29.99	66.37	-7.63	74.00	100	181	Peak
3		2416.250	87.73	30.06	117.80	N/A	N/A	100	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

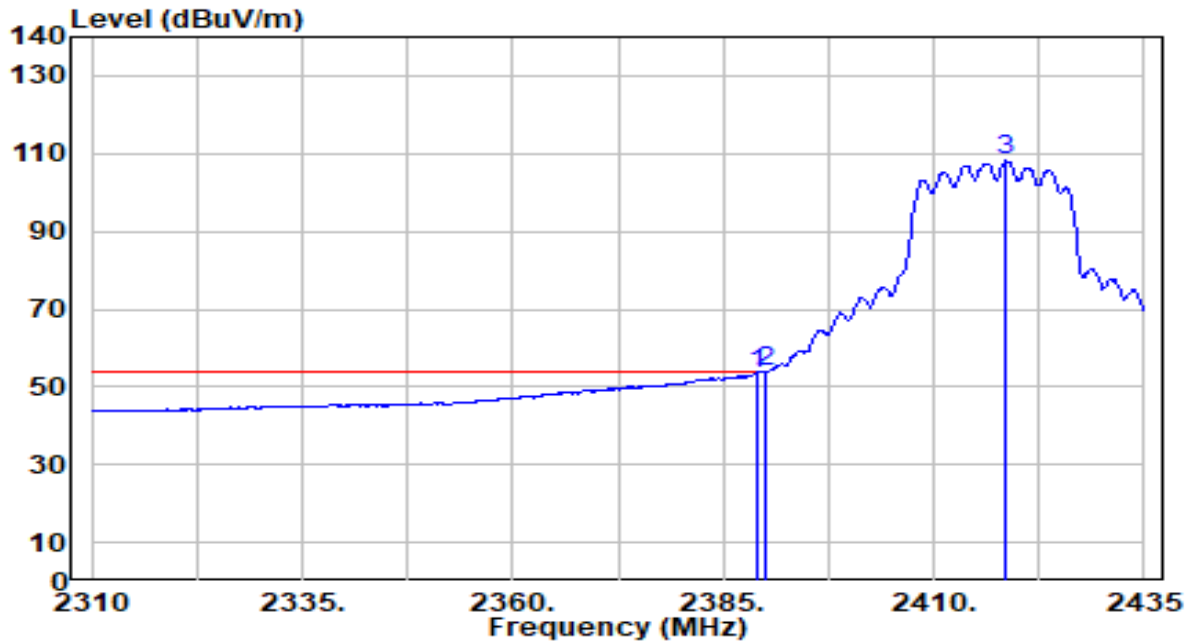


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	23.62	29.99	53.62	-0.18	54.00	100	181	Average
2	* 2390.000	23.65	29.99	53.65	-0.15	54.00	100	181	Average
3	2418.500	78.26	30.07	108.33	N/A	N/A	100	181	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

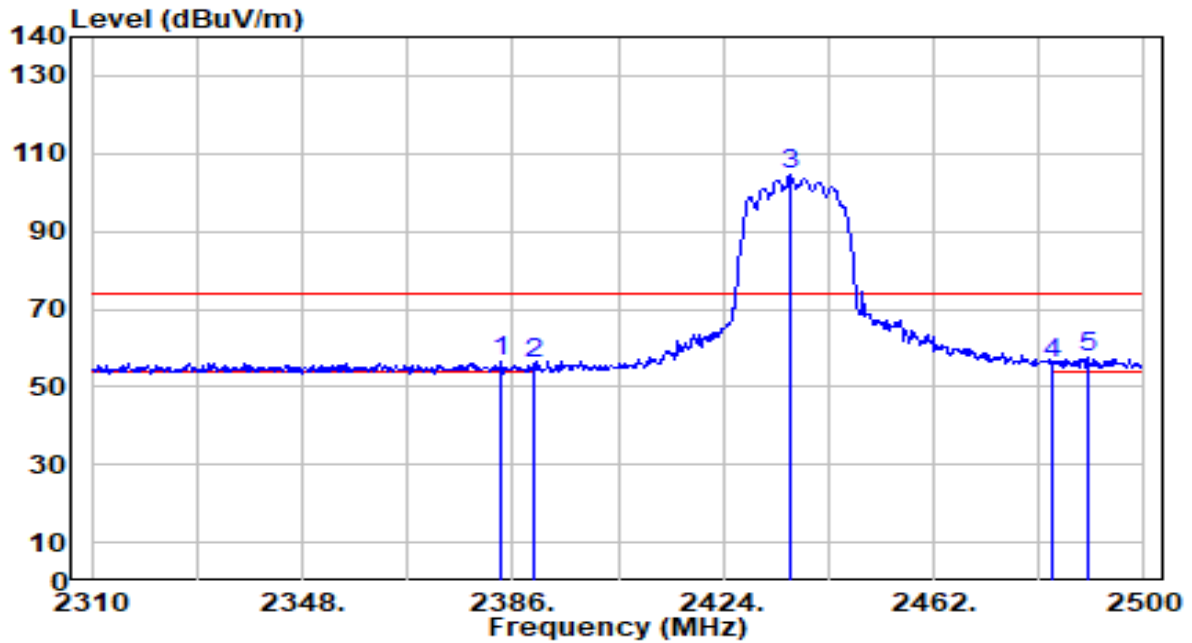


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.910	26.51	29.99	56.50	-17.50	74.00	101	310	Peak
2	2390.000	25.77	29.99	55.77	-18.23	74.00	101	310	Peak
3	2436.160	74.45	30.13	104.58	N/A	N/A	101	310	Peak
4	2483.500	25.50	30.29	55.78	-18.22	74.00	101	310	Peak
5	* 2489.740	27.37	30.31	57.67	-16.33	74.00	101	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

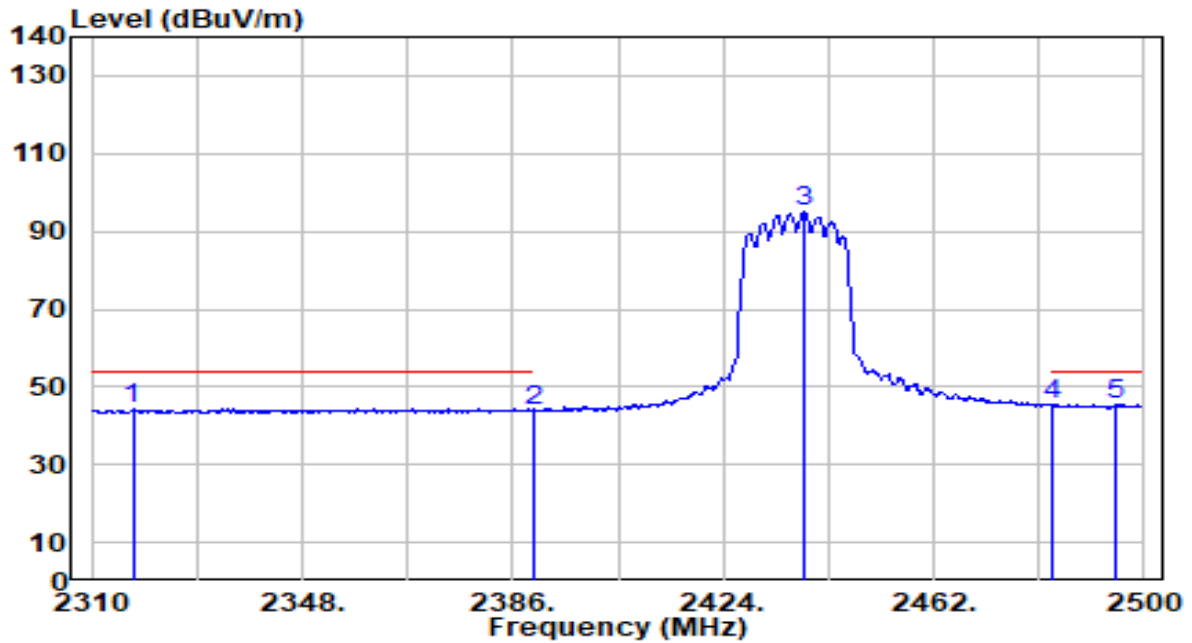


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2317.410	14.48	29.90	44.38	-9.62	54.00	101	310	Average
2	2390.000	13.81	29.99	43.81	-10.19	54.00	101	310	Average
3	2438.820	64.92	30.14	95.06	N/A	N/A	101	310	Average
4	2483.500	15.12	30.29	45.41	-8.59	54.00	101	310	Average
5	* 2494.680	15.34	30.32	45.66	-8.34	54.00	101	310	Average

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

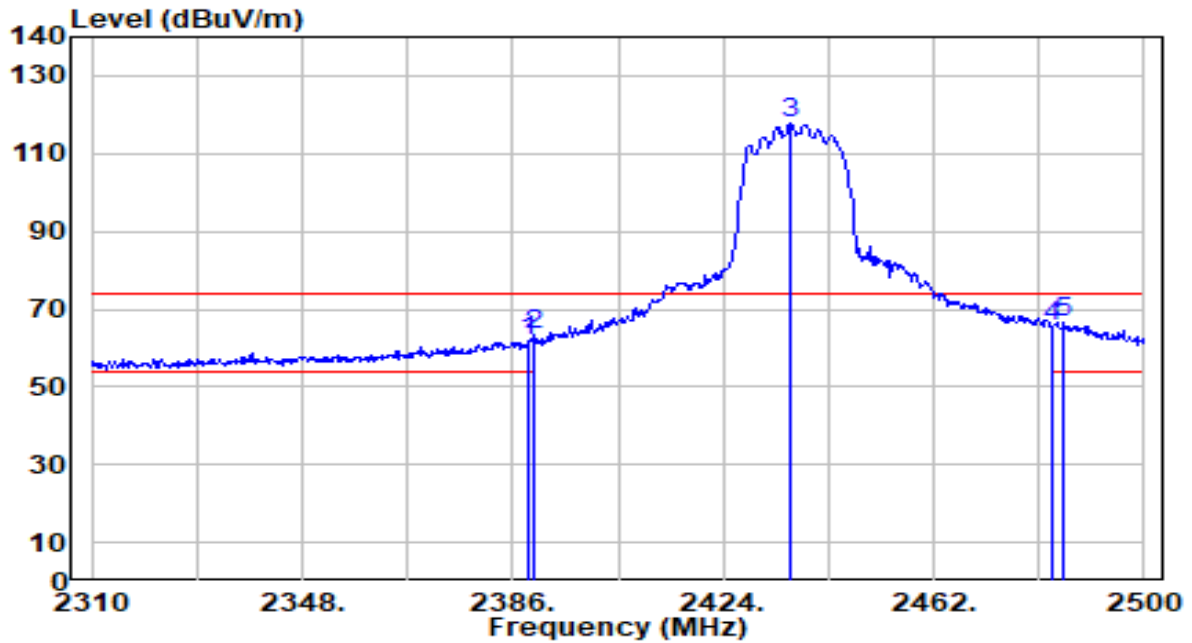


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	31.60	29.99	61.59	-12.41	74.00	173	233	Peak
2	2390.000	33.33	29.99	63.32	-10.68	74.00	173	233	Peak
3	2436.160	87.87	30.13	118.00	N/A	N/A	173	233	Peak
4	2483.500	35.18	30.29	65.47	-8.53	74.00	173	233	Peak
5	* 2485.560	36.37	30.29	66.67	-7.33	74.00	173	233	Peak

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

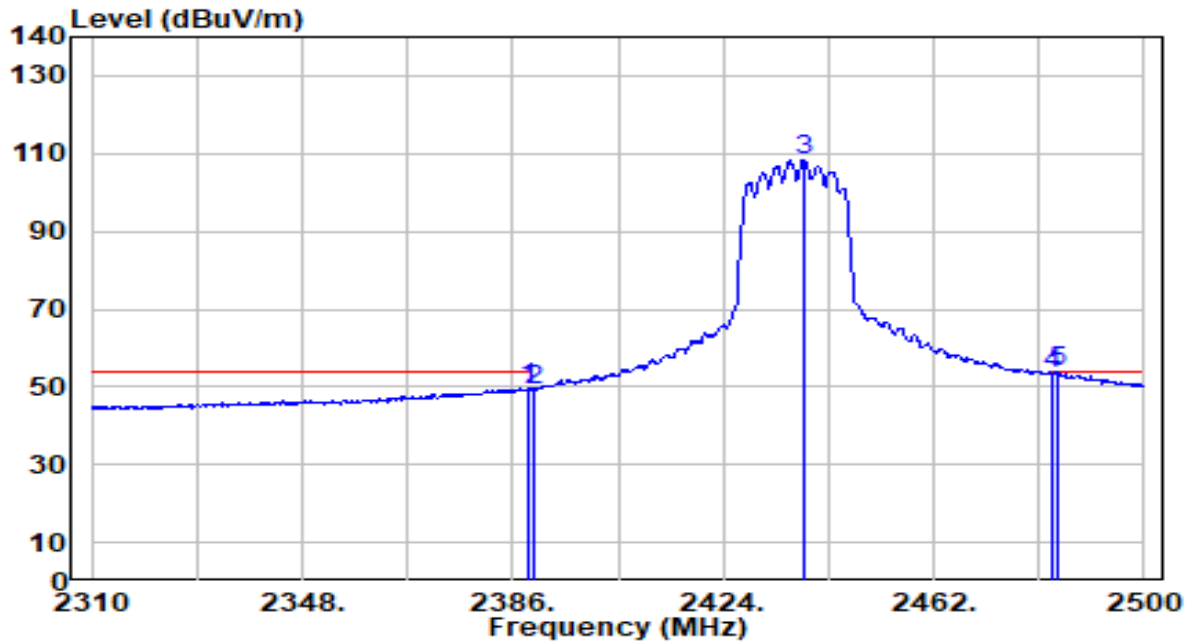


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	19.59	29.99	49.58	-4.42	54.00	173	233	Average
2	2390.000	19.38	29.99	49.38	-4.62	54.00	173	233	Average
3	2438.440	78.20	30.14	108.34	N/A	N/A	173	233	Average
4	2483.500	23.05	30.29	53.34	-0.66	54.00	173	233	Average
5	* 2484.610	23.55	30.29	53.83	-0.17	54.00	173	233	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

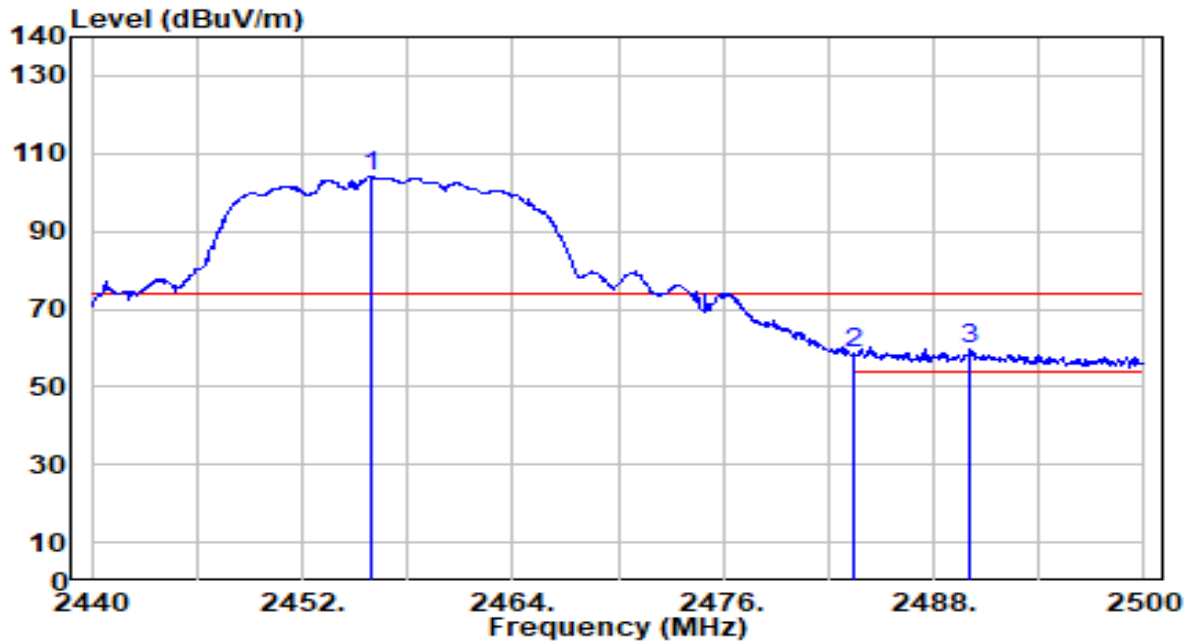


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.900	74.04	30.19	104.24	N/A	N/A	100	221	Peak
2	2483.500	28.39	30.29	58.67	-15.33	74.00	100	221	Peak
3	* 2490.040	29.62	30.31	59.93	-14.07	74.00	100	221	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

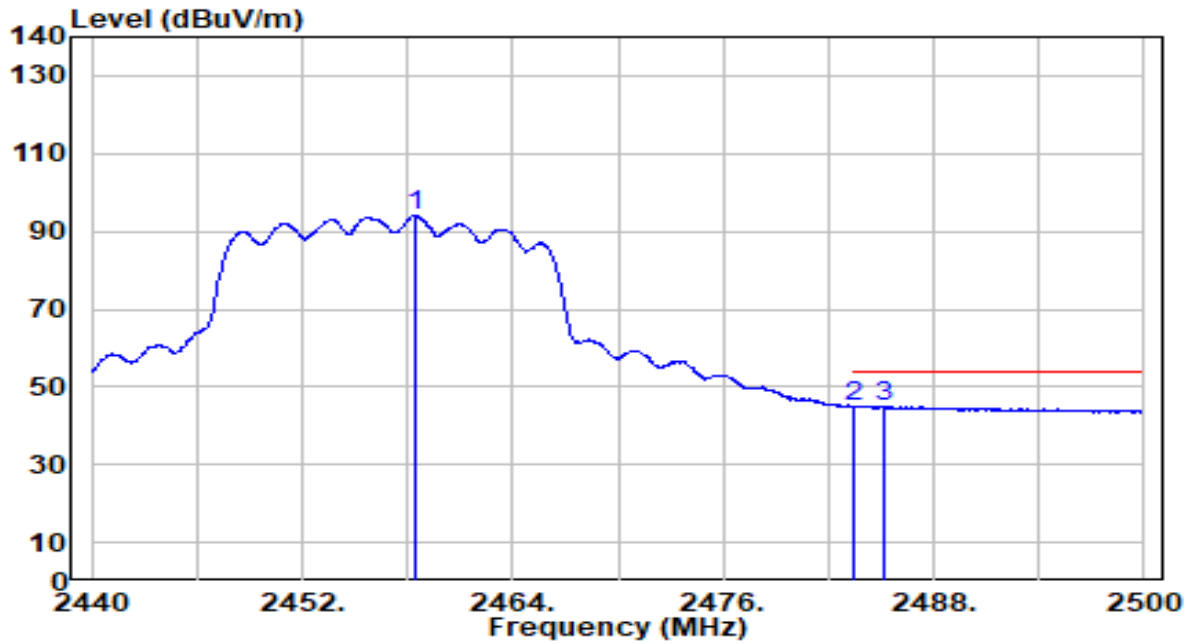


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.420	63.97	30.20	94.17	N/A	N/A	100	221	Average
2	* 2483.500	14.72	30.29	45.00	-9.00	54.00	100	221	Average
3	2485.120	14.64	30.29	44.93	-9.07	54.00	100	221	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

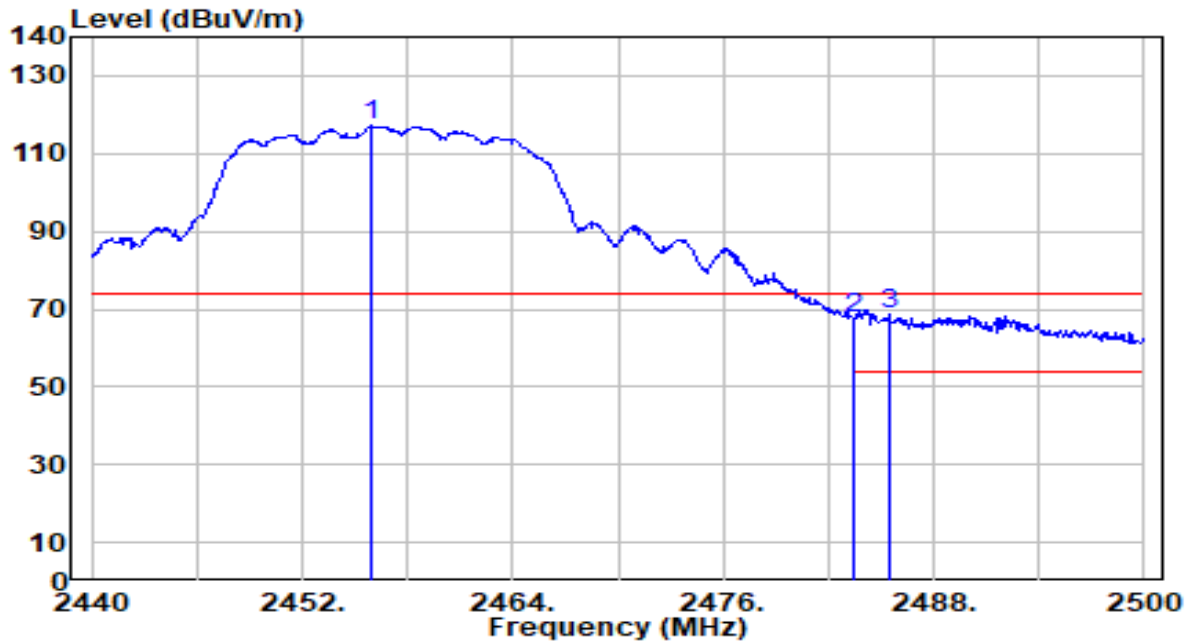


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.900	86.88	30.19	117.08	N/A	N/A	123	182	Peak
2	2483.500	37.36	30.29	67.64	-6.36	74.00	123	182	Peak
3	* 2485.420	38.29	30.29	68.58	-5.42	74.00	123	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

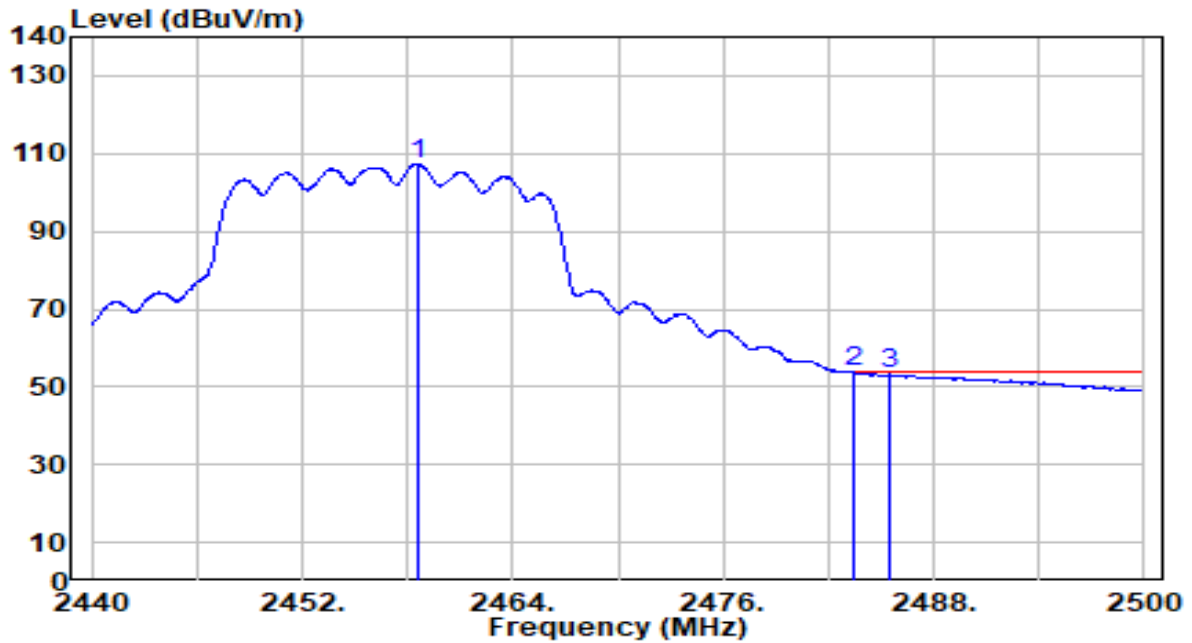


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.540	77.17	30.20	107.38	N/A	N/A	123	182	Average
2	* 2483.500	23.56	30.29	53.84	-0.16	54.00	123	182	Average
3	2485.420	22.90	30.29	53.19	-0.81	54.00	123	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

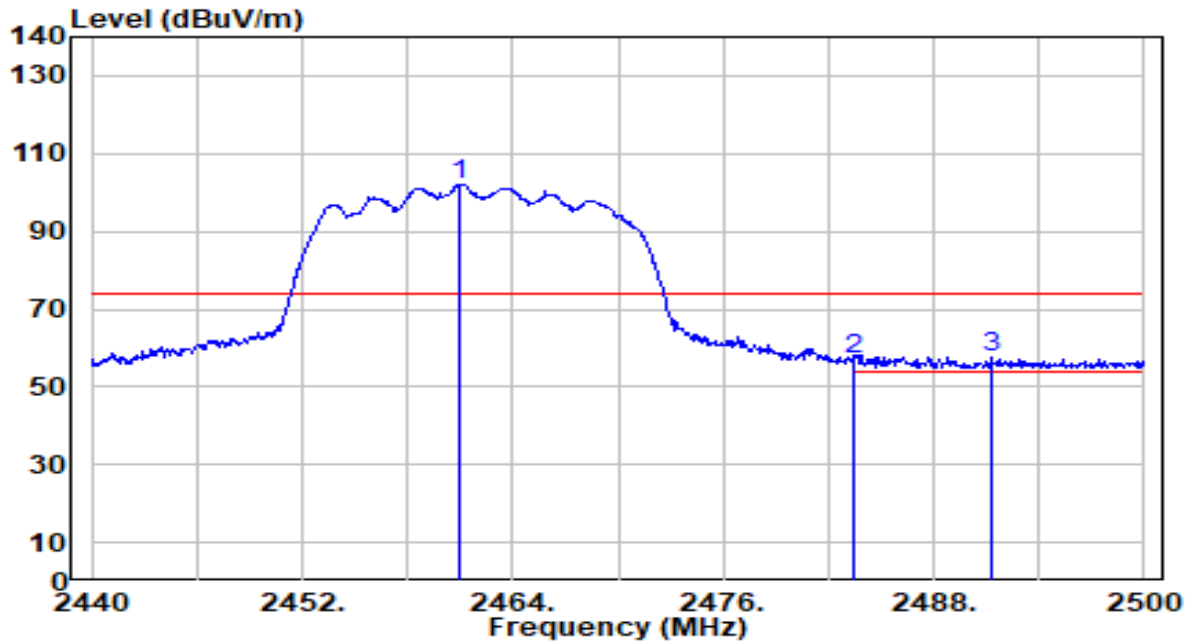


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.000	71.93	30.21	102.14	N/A	N/A	181	194	Peak
2	2483.500	27.02	30.29	57.31	-16.69	74.00	181	194	Peak
3	* 2491.300	27.46	30.31	57.77	-16.23	74.00	181	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

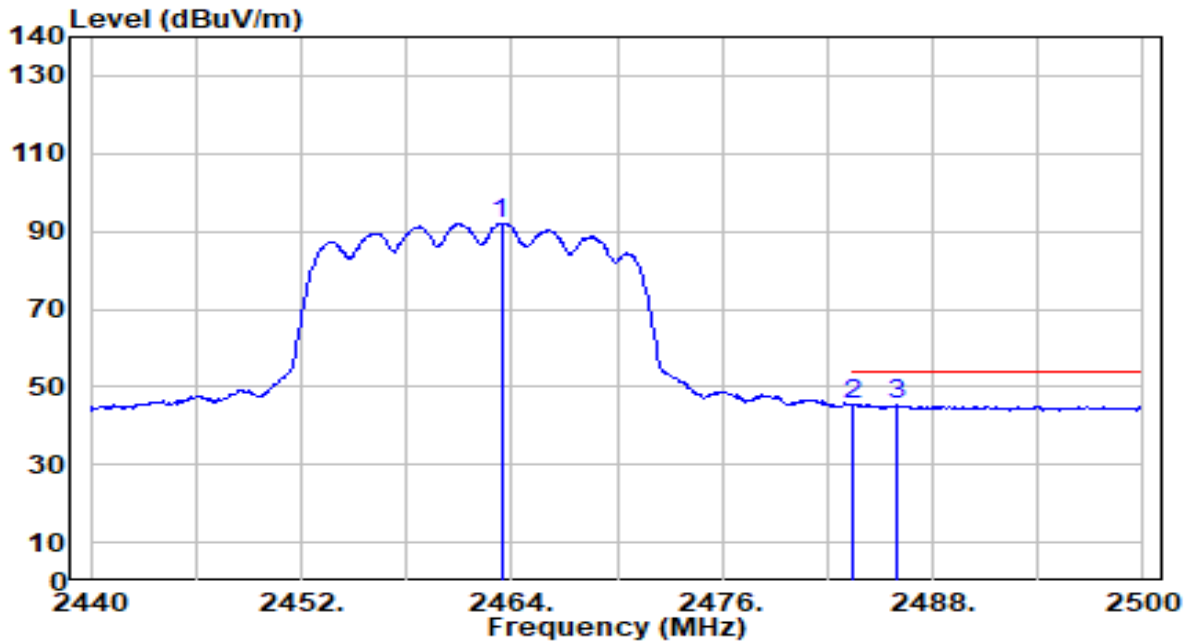


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.400	61.90	30.22	92.12	N/A	N/A	181	194	Average
2	* 2483.500	15.06	30.29	45.35	-8.65	54.00	181	194	Average
3	2486.020	14.91	30.29	45.20	-8.80	54.00	181	194	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

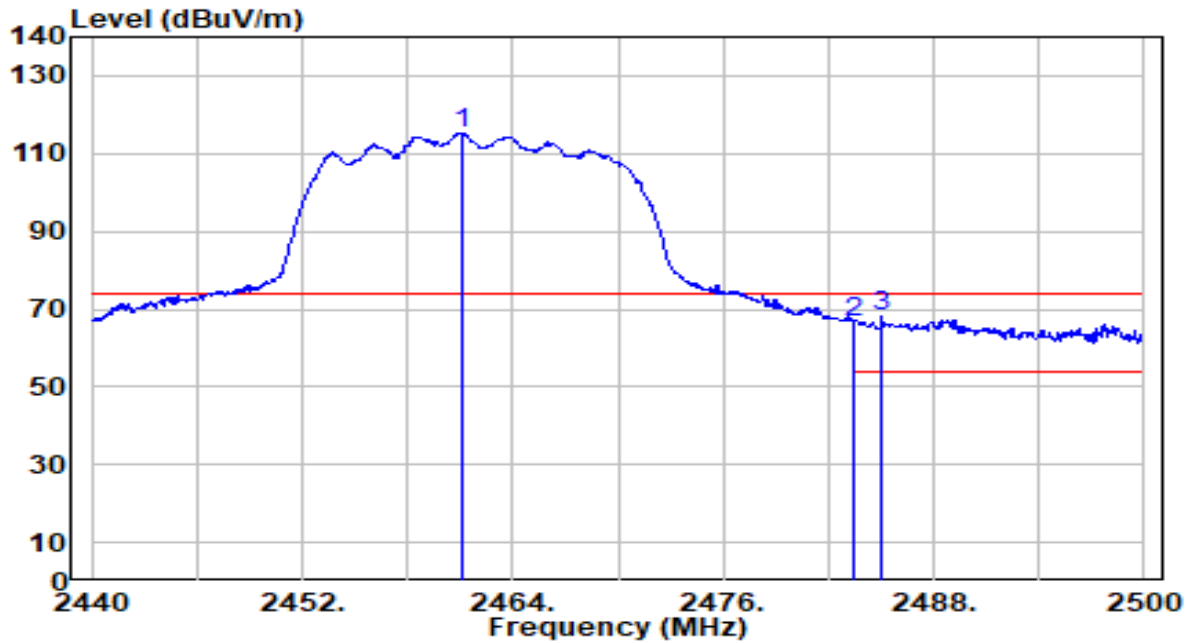


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	85.03	30.21	115.24	N/A	N/A	153	235	Peak
2	2483.500	36.36	30.29	66.65	-7.35	74.00	153	235	Peak
3	* 2485.060	37.68	30.29	67.97	-6.03	74.00	153	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

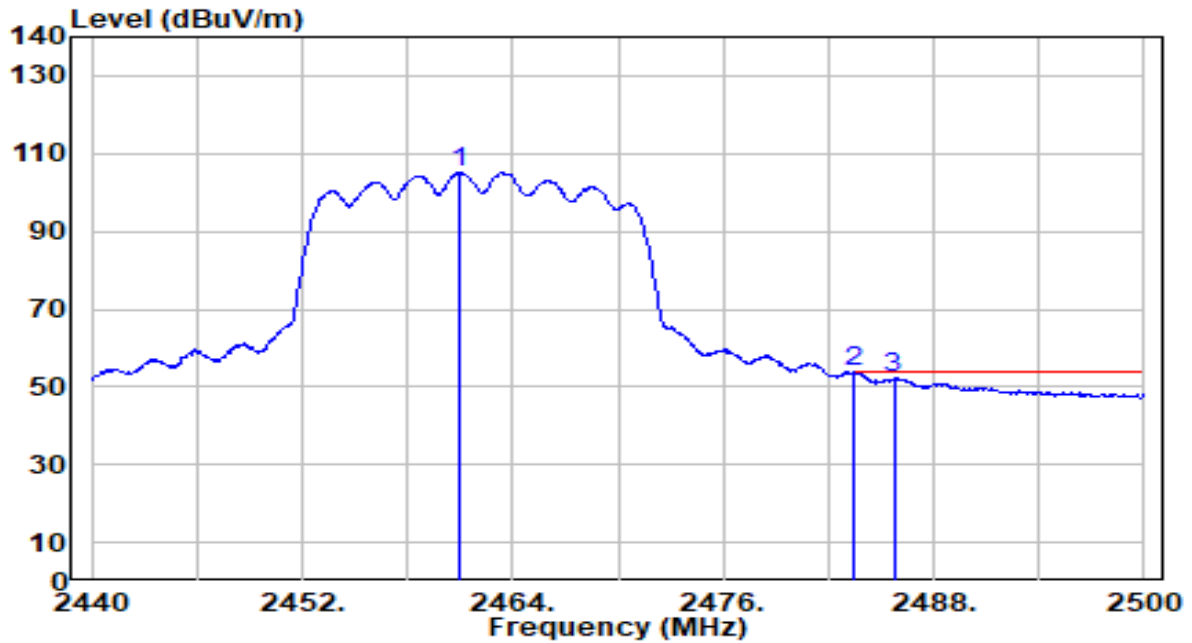


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	74.92	30.21	105.13	N/A	N/A	153	235	Average
2	* 2483.500	23.59	30.29	53.88	-0.12	54.00	153	235	Average
3	2485.720	21.88	30.29	52.17	-1.83	54.00	153	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

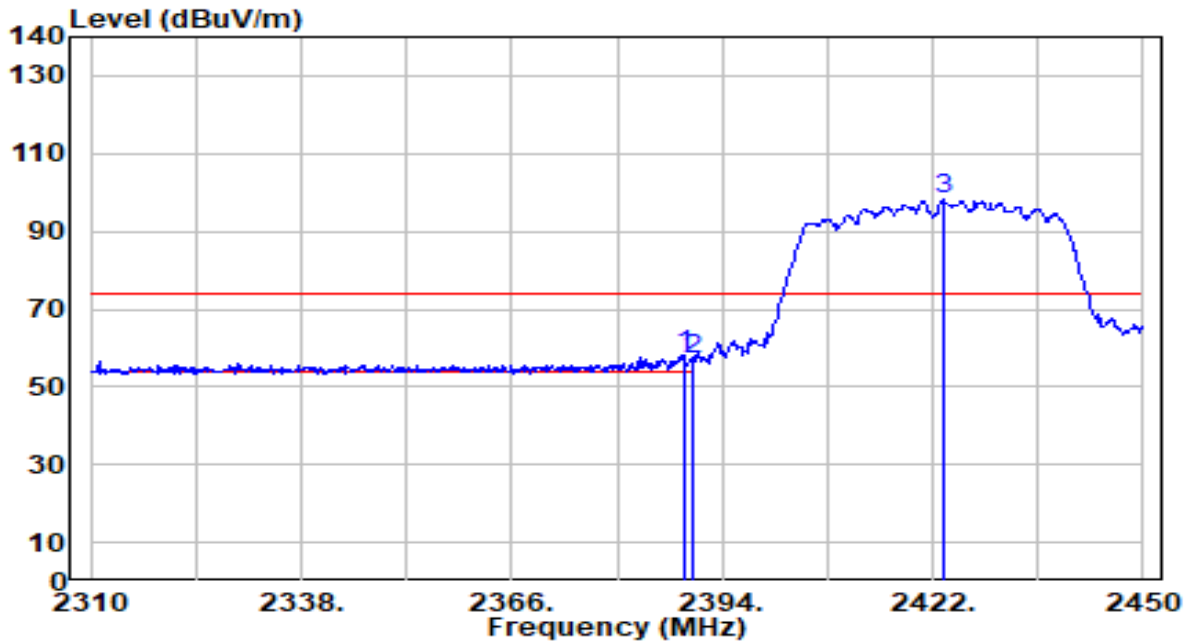


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	28.26	29.99	58.25	-15.75	74.00	100	231	Peak
2		27.05	29.99	57.04	-16.96	74.00	100	231	Peak
3		68.09	30.09	98.17	N/A	N/A	100	231	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

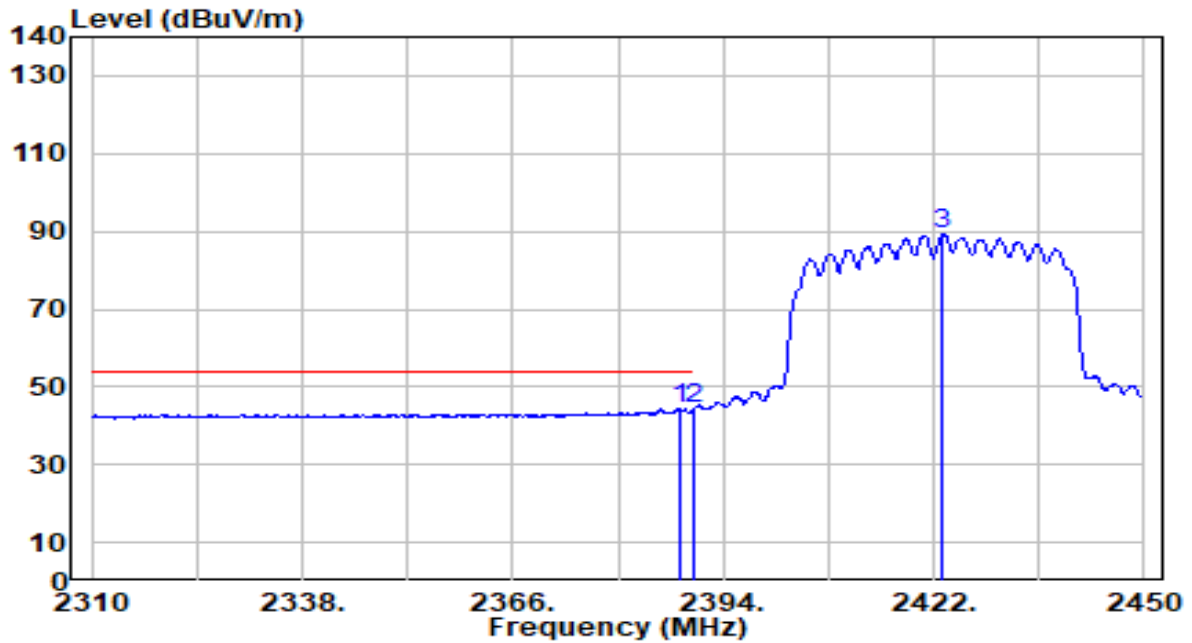


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.120	14.59	29.99	44.58	-9.42	54.00	100	231	Average
2		2390.000	14.15	29.99	44.14	-9.86	54.00	100	231	Average
3		2423.260	59.23	30.09	89.32	N/A	N/A	100	231	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

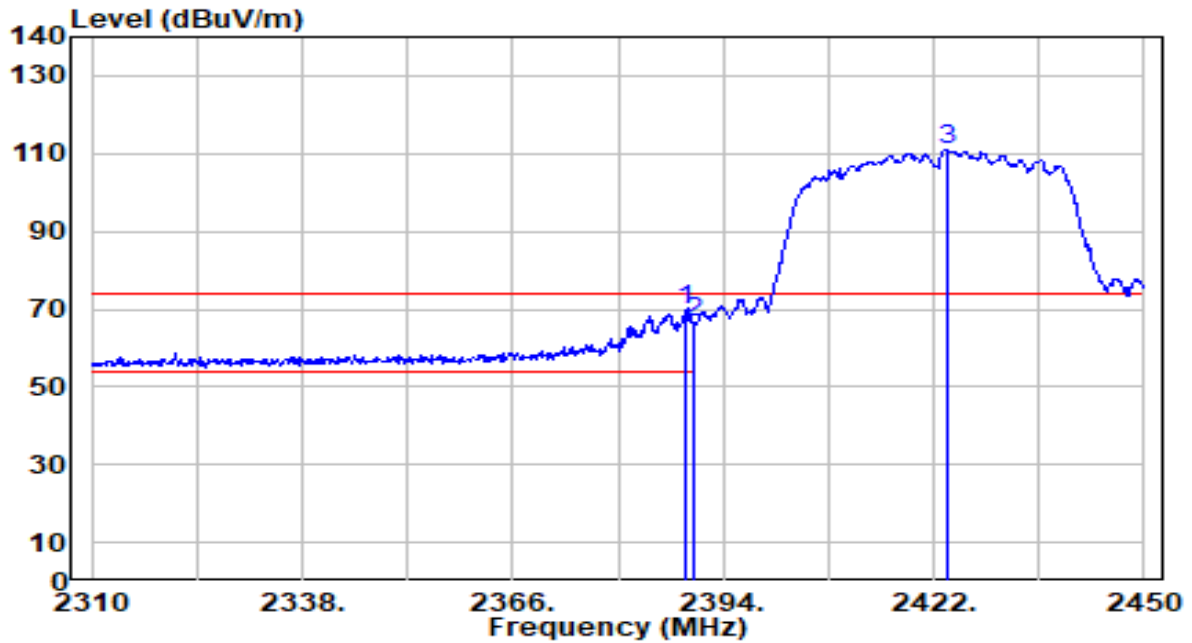


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.960	39.59	29.99	69.58	-4.42	74.00	122	45	Peak
2		2390.000	36.37	29.99	66.37	-7.63	74.00	122	45	Peak
3		2423.680	80.90	30.09	110.99	N/A	N/A	122	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

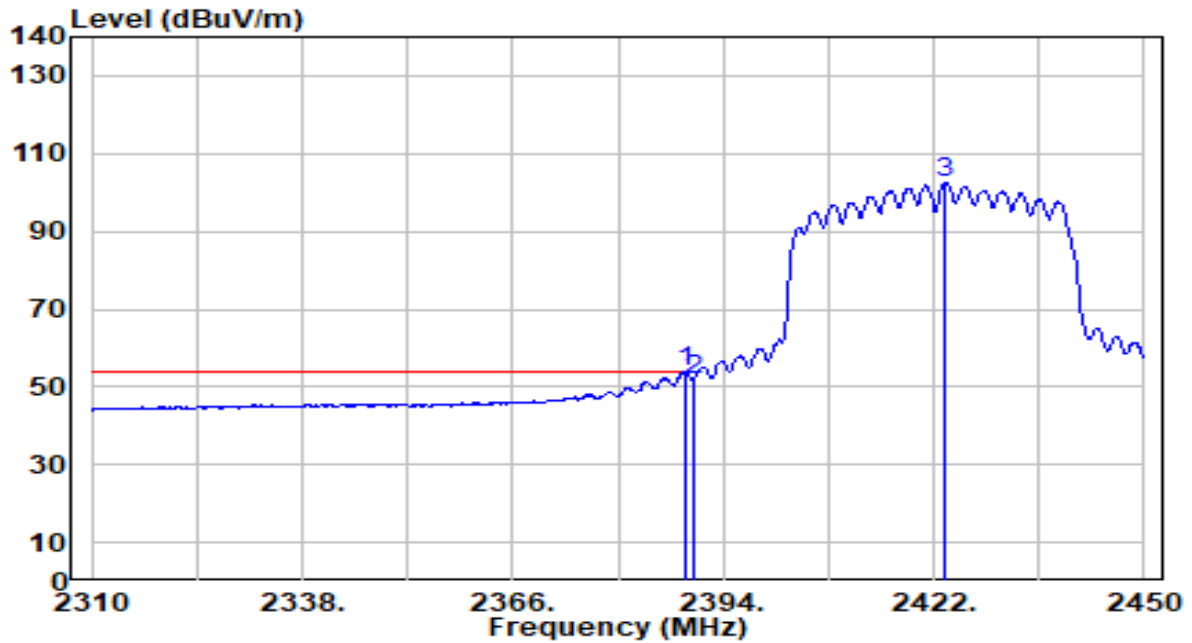


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.820	23.90	29.99	53.89	-0.11	54.00	122	45	Average
2		2390.000	21.64	29.99	51.63	-2.37	54.00	122	45	Average
3		2423.540	72.21	30.09	102.30	N/A	N/A	122	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

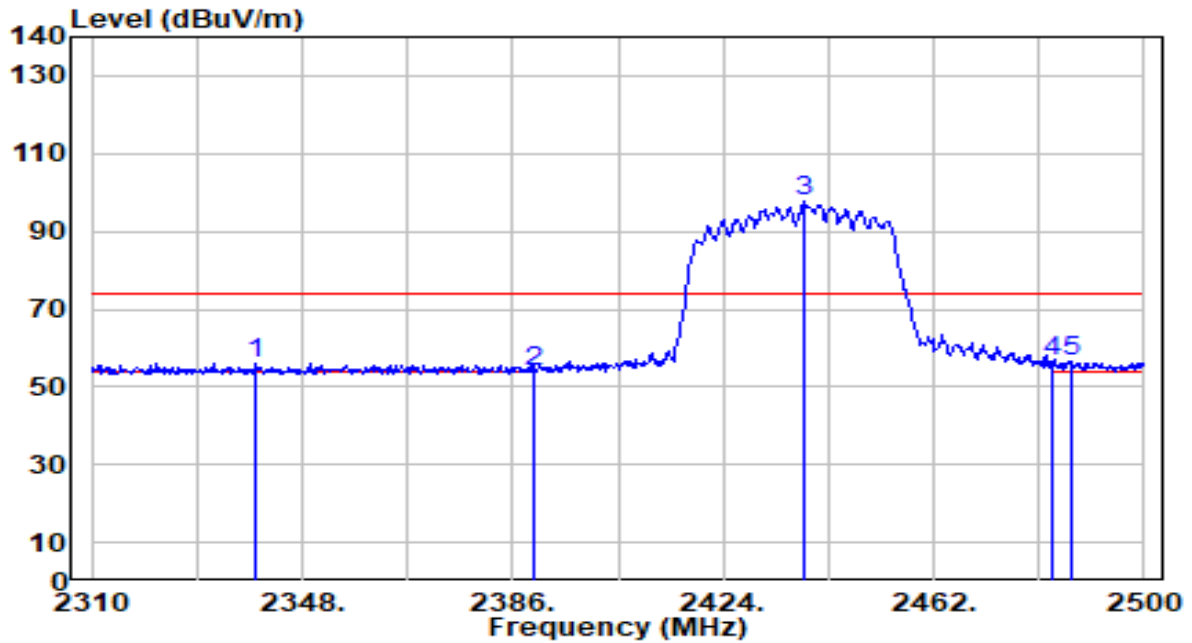


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2339.640	26.24	29.93	56.17	-17.83	74.00	149	312	Peak
2	2390.000	24.10	29.99	54.10	-19.90	74.00	149	312	Peak
3	2438.820	67.85	30.14	97.98	N/A	N/A	149	312	Peak
4	2483.500	26.09	30.29	56.38	-17.62	74.00	149	312	Peak
5	* 2487.080	26.11	30.30	56.41	-17.59	74.00	149	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

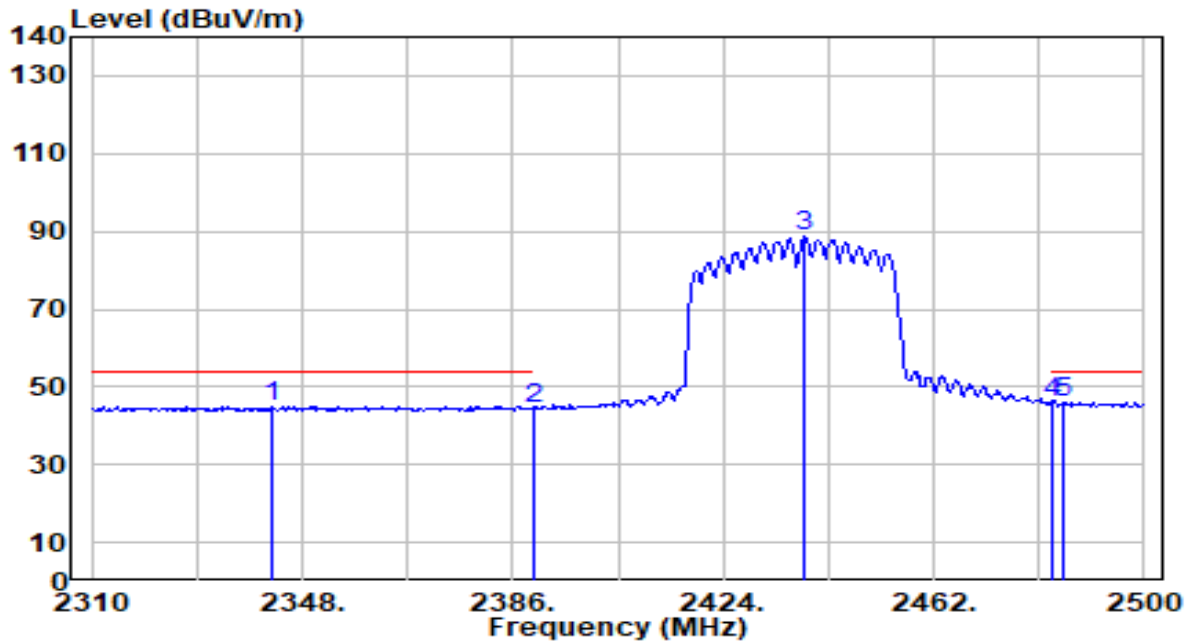


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2342.490	15.14	29.93	45.07	-8.93	54.00	149	312	Average
2	2390.000	14.25	29.99	44.24	-9.76	54.00	149	312	Average
3	2438.630	58.50	30.14	88.64	N/A	N/A	149	312	Average
4	2483.500	15.65	30.29	45.93	-8.07	54.00	149	312	Average
5	* 2485.180	15.81	30.29	46.10	-7.90	54.00	149	312	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

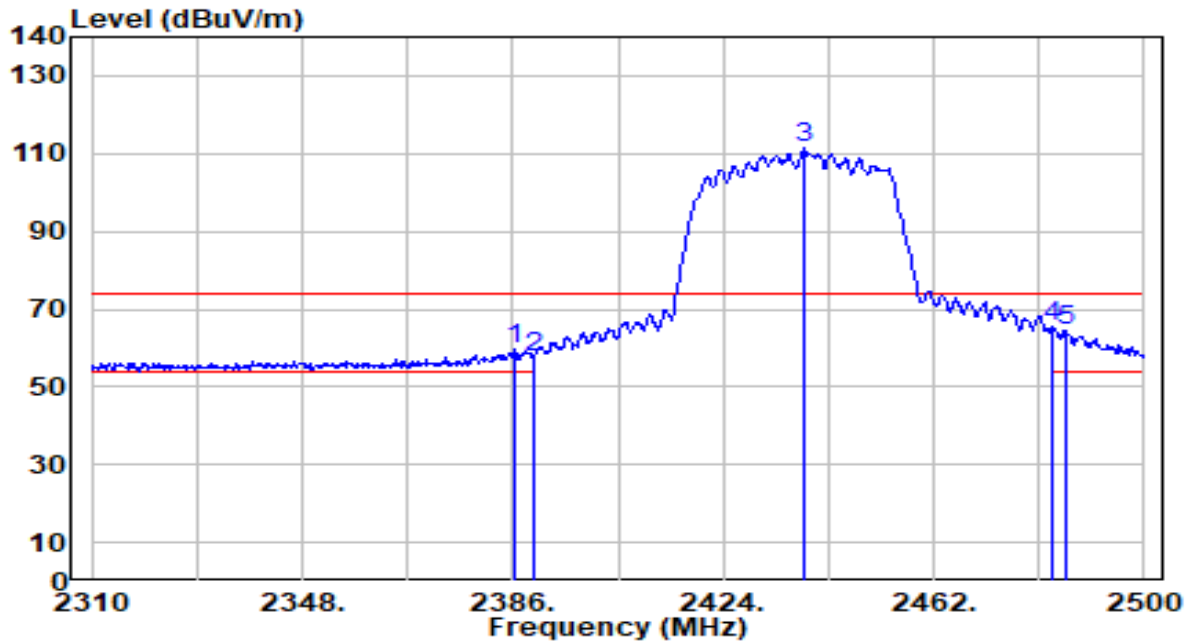


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	29.49	29.99	59.48	-14.52	74.00	174	237	Peak
2	2390.000	27.39	29.99	57.39	-16.61	74.00	174	237	Peak
3	2438.630	81.33	30.14	111.47	N/A	N/A	174	237	Peak
4	* 2483.500	35.07	30.29	65.36	-8.64	74.00	174	237	Peak
5	2485.940	34.42	30.29	64.72	-9.28	74.00	174	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

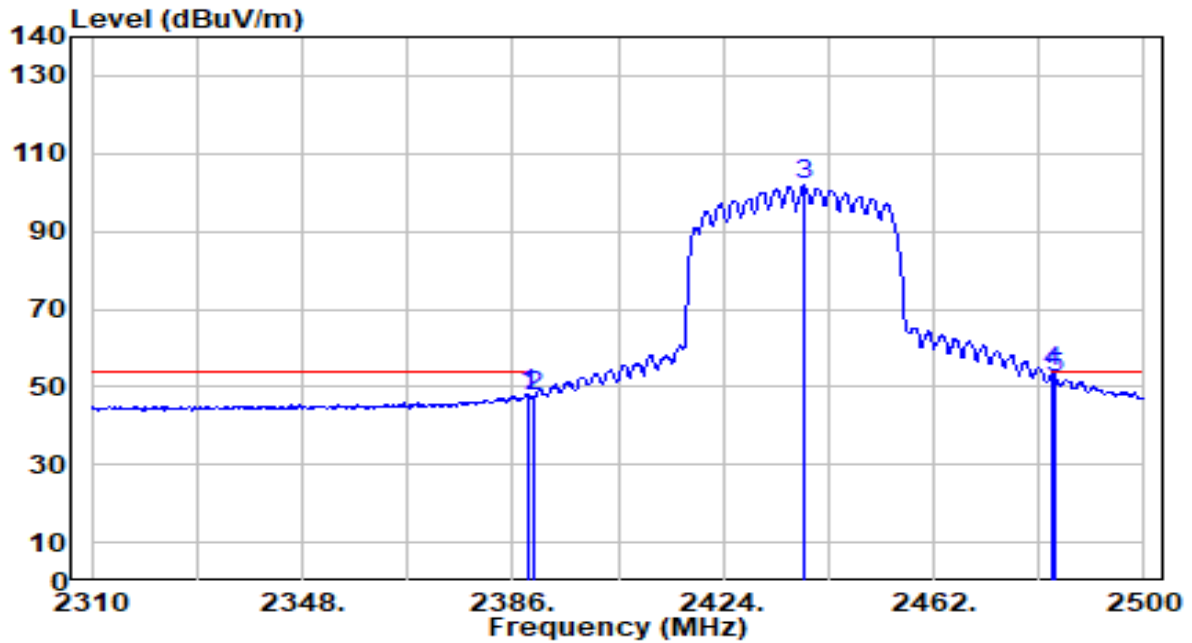


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	18.06	29.99	48.05	-5.95	54.00	174	237	Average
2	2390.000	17.34	29.99	47.34	-6.66	54.00	174	237	Average
3	2438.630	71.67	30.14	101.80	N/A	N/A	174	237	Average
4	* 2483.500	23.58	30.29	53.86	-0.14	54.00	174	237	Average
5	2484.040	22.08	30.29	52.37	-1.63	54.00	174	237	Average

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

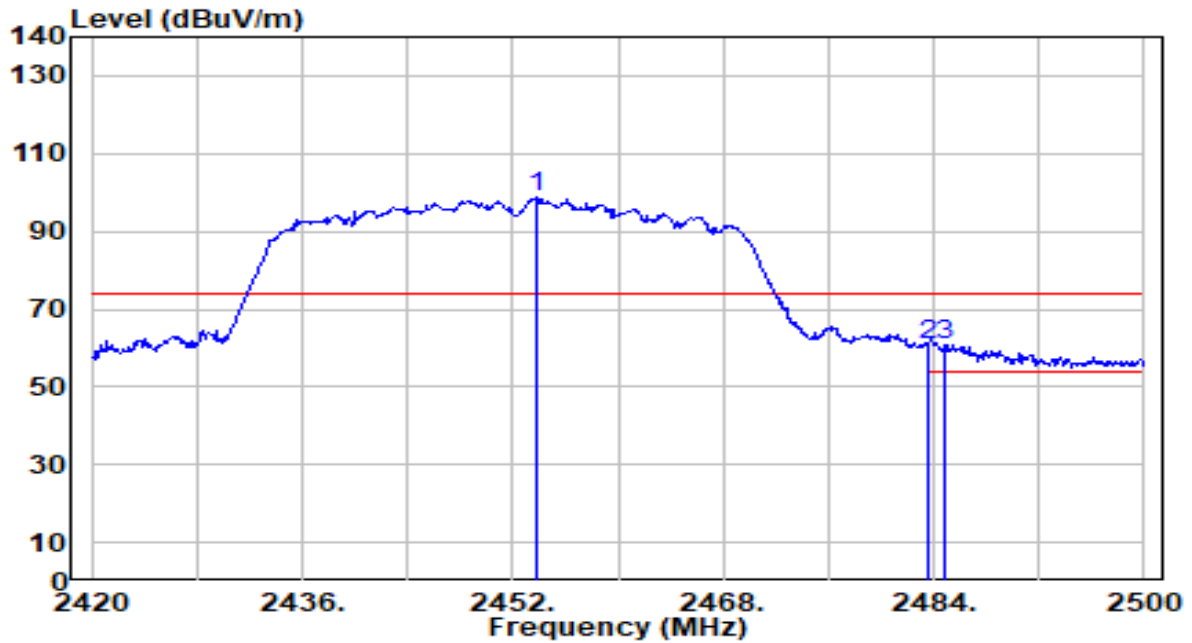


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.760	68.70	30.19	98.89	N/A	N/A	100	220	Peak
2	2483.500	30.52	30.29	60.80	-13.20	74.00	100	220	Peak
3	* 2484.800	30.61	30.29	60.90	-13.10	74.00	100	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

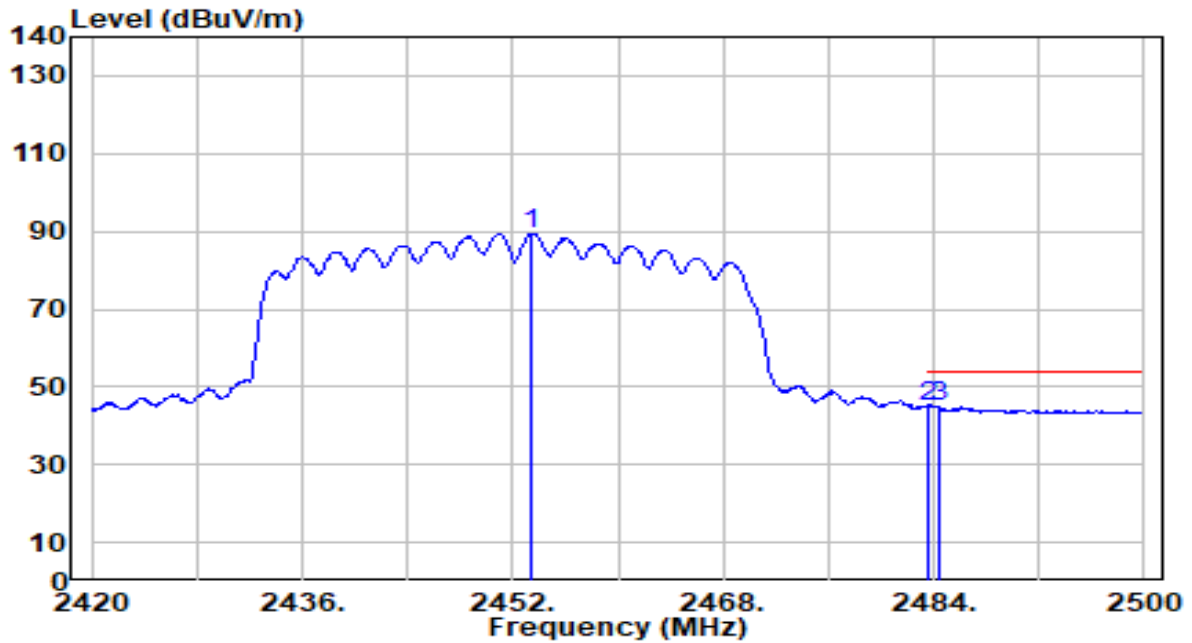


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.440	59.14	30.19	89.33	N/A	N/A	100	220	Average
2	* 2483.500	14.78	30.29	45.06	-8.94	54.00	100	220	Average
3	2484.480	14.48	30.29	44.76	-9.24	54.00	100	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

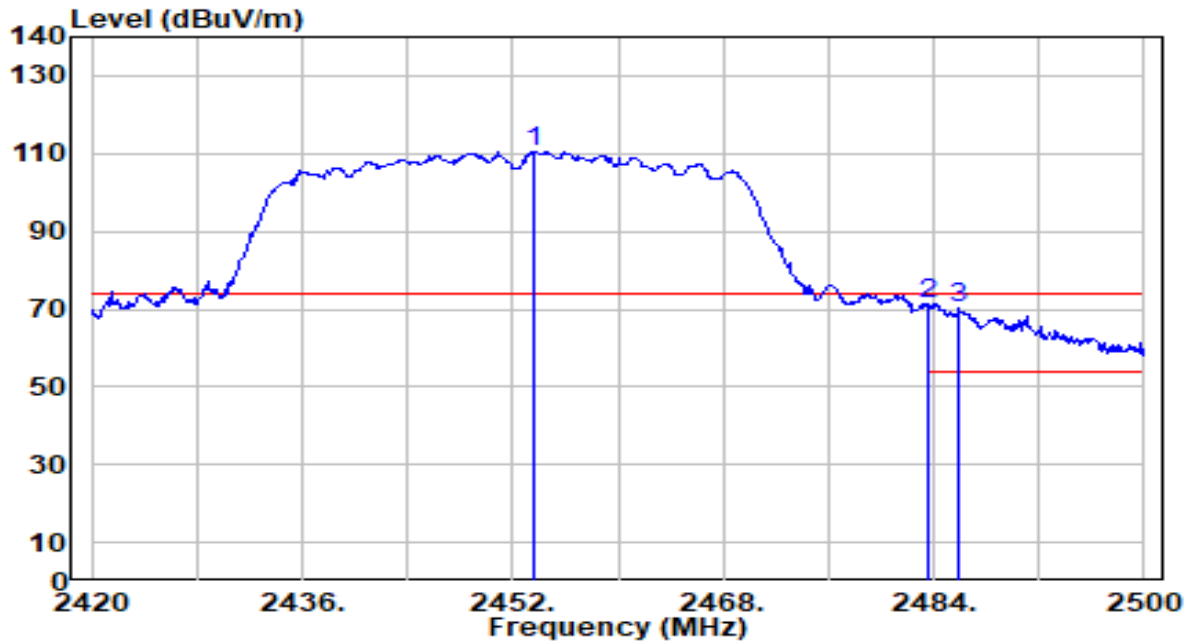


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.680	80.38	30.19	110.56	N/A	N/A	100	180	Peak
2	* 2483.500	41.04	30.29	71.32	-2.68	74.00	100	180	Peak
3	2485.920	39.74	30.29	70.03	-3.97	74.00	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-18
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

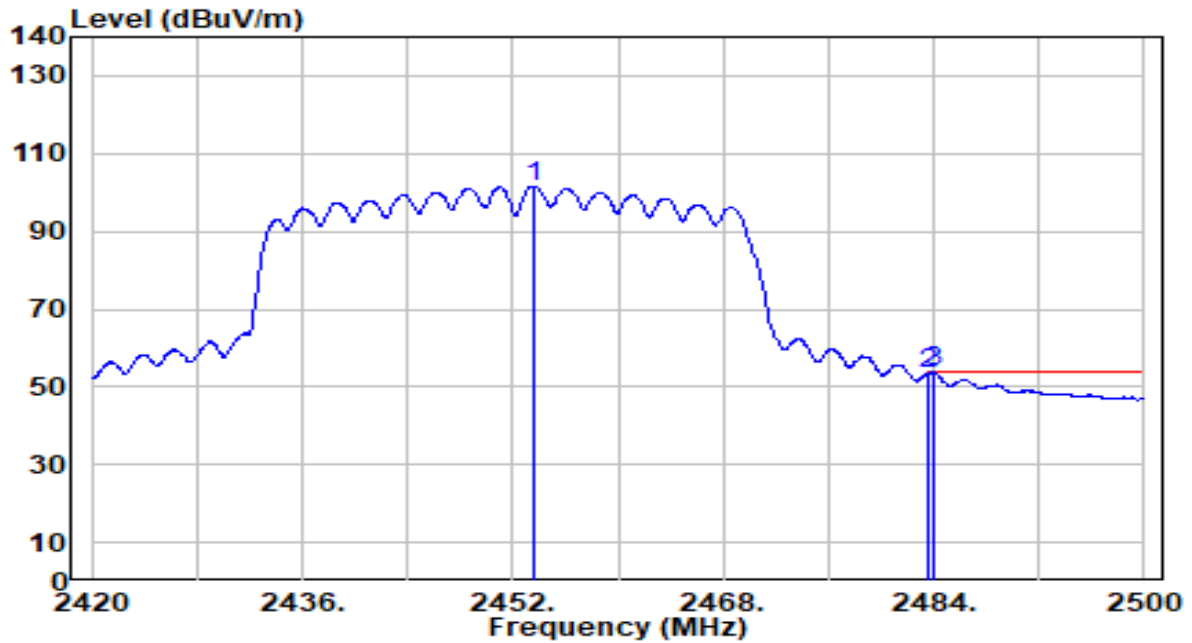

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.520	71.50	30.19	101.69	N/A	N/A	100	180	Average
2	2483.500	23.08	30.29	53.36	-0.64	54.00	100	180	Average
3	* 2483.920	23.56	30.29	53.85	-0.15	54.00	100	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

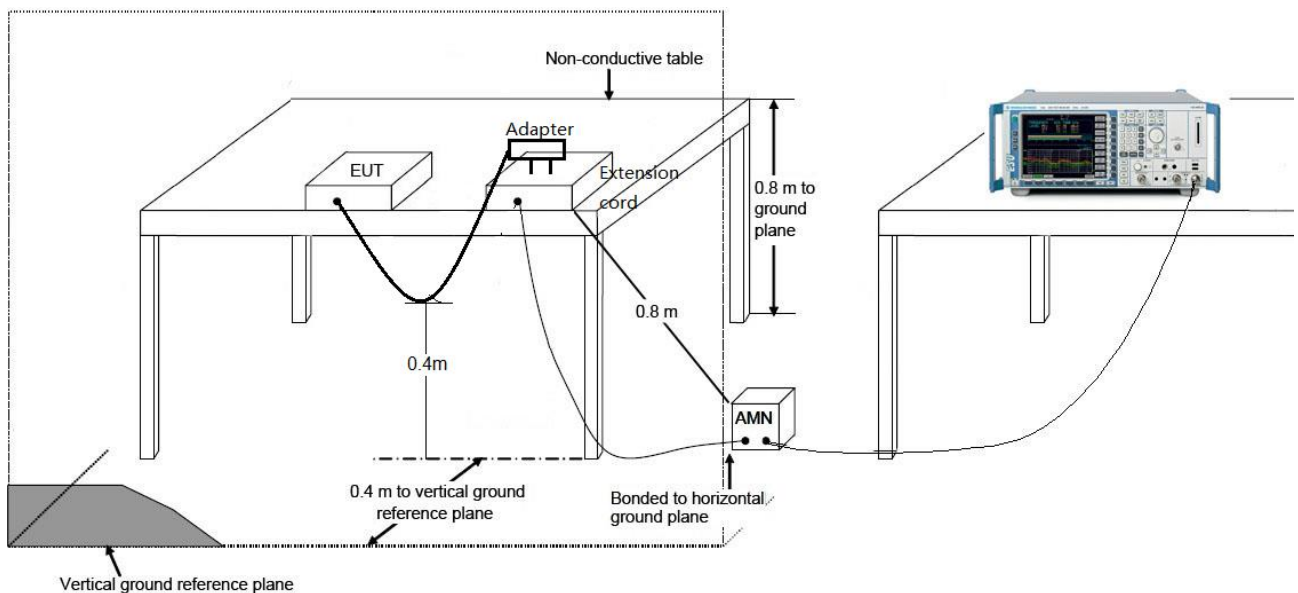

7.8.3. Test Result

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-24
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.4°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

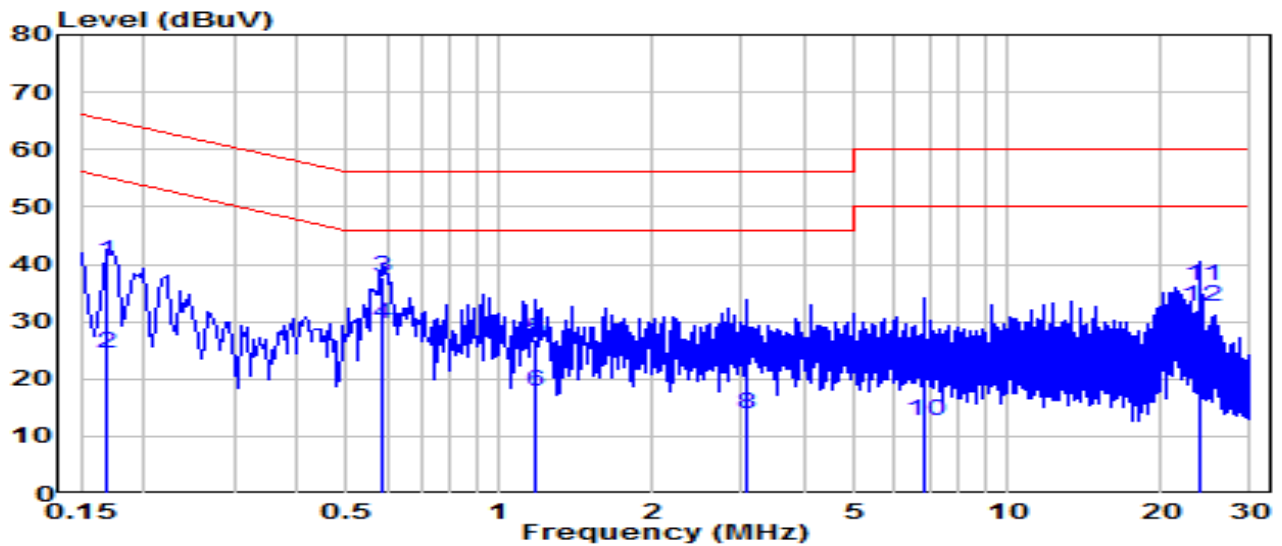


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	30.95	9.62	40.57	-24.49	65.06	QP
2	0.168	14.94	9.62	24.56	-30.50	55.06	Average
3	* 0.586	28.02	9.65	37.66	-18.34	56.00	QP
4	* 0.586	19.82	9.65	29.47	-16.53	46.00	Average
5	1.180	17.08	9.67	26.75	-29.25	56.00	QP
6	1.180	8.23	9.67	17.91	-28.09	46.00	Average
7	3.079	13.04	9.71	22.76	-33.24	56.00	QP
8	3.079	4.21	9.71	13.93	-32.07	46.00	Average
9	6.863	10.91	9.79	20.69	-39.31	60.00	QP
10	6.863	2.78	9.79	12.57	-37.43	50.00	Average
11	23.998	26.40	9.91	36.31	-23.69	60.00	QP
12	23.998	22.78	9.91	32.69	-17.31	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-24
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.4°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

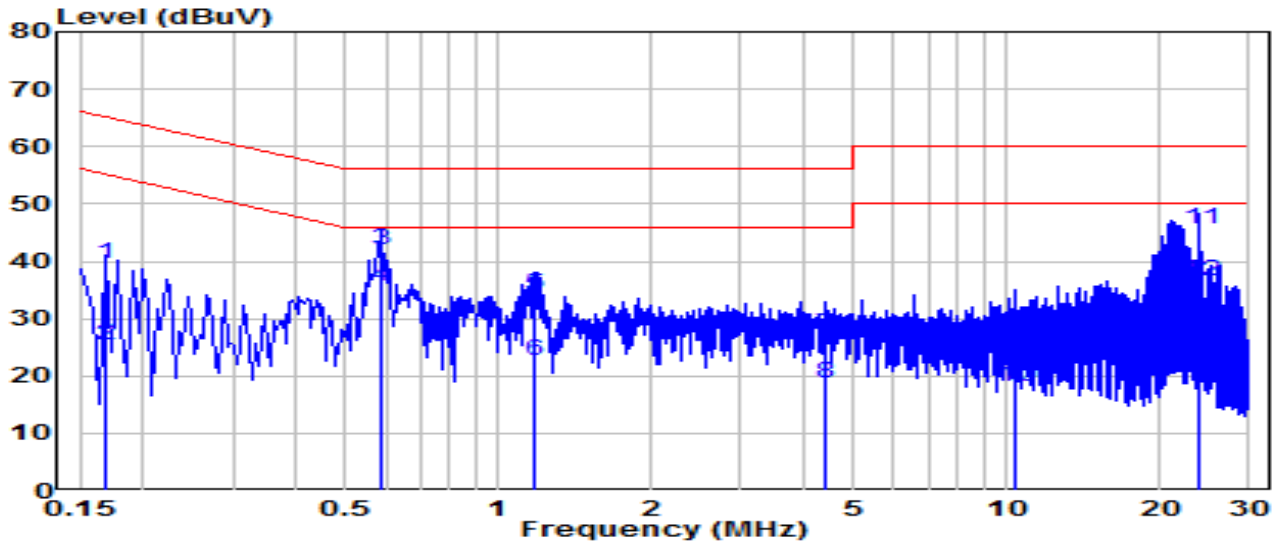


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	29.96	9.62	39.58	-25.48	65.06	QP
2	0.168	15.64	9.62	25.26	-29.80	55.06	Average
3	* 0.586	32.28	9.65	41.93	-14.07	56.00	QP
4	* 0.586	25.92	9.65	35.57	-10.43	46.00	Average
5	1.176	24.45	9.67	34.13	-21.87	56.00	QP
6	1.176	13.10	9.67	22.77	-23.23	46.00	Average
7	4.416	17.28	9.74	27.02	-28.98	56.00	QP
8	4.416	8.88	9.74	18.62	-27.38	46.00	Average
9	10.418	17.87	9.88	27.75	-32.25	60.00	QP
10	10.418	8.24	9.88	18.12	-31.88	50.00	Average
11	23.998	35.66	10.01	45.67	-14.33	60.00	QP
12	23.998	26.39	10.01	36.41	-13.59	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-24
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.4°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

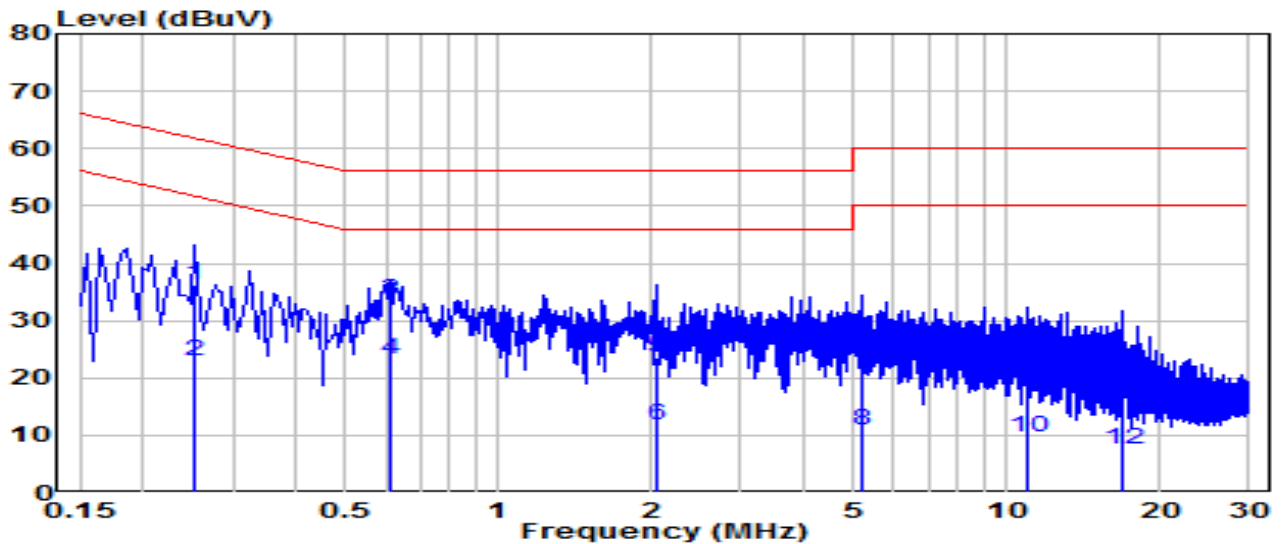


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.253	26.55	9.63	36.18	-25.46	61.64	QP
2	0.253	13.34	9.63	22.97	-28.67	51.64	Average
3	* 0.613	23.77	9.65	33.42	-22.58	56.00	QP
4	* 0.613	13.46	9.65	23.10	-22.90	46.00	Average
5	2.040	14.00	9.69	23.69	-32.31	56.00	QP
6	2.040	2.01	9.69	11.71	-34.29	46.00	Average
7	5.221	12.90	9.75	22.65	-37.35	60.00	QP
8	5.221	0.97	9.75	10.72	-39.28	50.00	Average
9	11.057	11.91	9.87	21.78	-38.22	60.00	QP
10	11.057	-0.24	9.87	9.63	-40.37	50.00	Average
11	16.933	8.26	9.91	18.17	-41.83	60.00	QP
12	16.933	-2.30	9.91	7.60	-42.40	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AC750 Dual Band Wi-Fi Router	Date of Test	2023-04-24
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.4°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

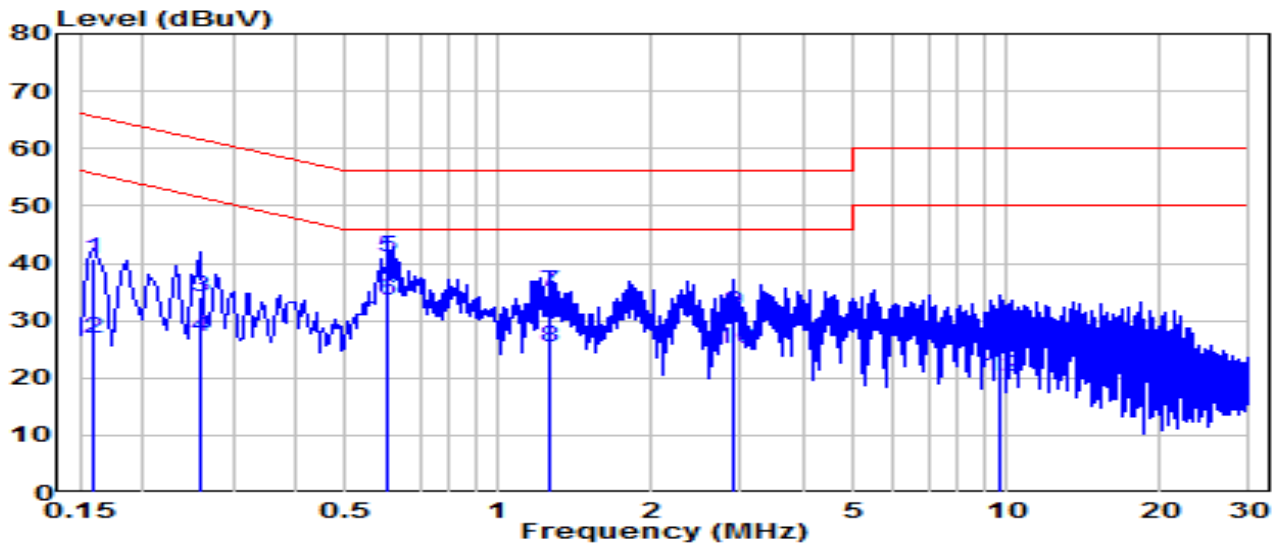

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	31.07	9.62	40.69	-24.82	65.52	QP
2	0.159	17.33	9.62	26.95	-28.57	55.52	Average
3	0.258	24.49	9.63	34.11	-27.38	61.50	QP
4	0.258	17.51	9.63	27.13	-24.36	51.50	Average
5 *	0.604	31.36	9.65	41.01	-14.99	56.00	QP
6 *	0.604	23.82	9.65	33.46	-12.54	46.00	Average
7	1.261	25.37	9.68	35.04	-20.96	56.00	QP
8	1.261	15.69	9.68	25.36	-20.64	46.00	Average
9	2.890	21.69	9.71	31.40	-24.60	56.00	QP
10	2.890	15.30	9.71	25.01	-20.99	46.00	Average
11	9.694	18.21	9.86	28.08	-31.92	60.00	QP
12	9.694	10.43	9.86	20.29	-29.71	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2304TW0106-UT” file.

Appendix B : External Photograph

Refer to “2304TW0106-UE” file.

Appendix C : Internal Photograph

Refer to “2304TW0106-UI” file.

————— The End —————