

RF MEASUREMENT REPORT

FCC ID : 2AXJ4D230
APPLICANT : TP-Link Corporation Limited
Application Type : Certification
Product : Tapo Video Doorbell Camera
Model No. : Tapo D230
Brand Name : tp-link
FCC Classification : Digital Transmission System (DTS)
FCC Rule Part(s) : Part15 Subpart C (Section 15.247)
Test Procedure(s) : ANSI C63.10-2013
Received Date : December 01, 2022
Test Date : December 14~20, 2022

Tested By : Owen Tsai
(Owen Tsai)
Reviewed By : Paddy Chen
(Paddy Chen)
Approved By : Chenz Ker
(Chenz Ker)



The test results only relate to the tested sample.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2212TW0107-U2	1.0	Original Report	2023-03-06	Valid

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Standard.....	7
2.3. Test Mode.....	8
2.4. Operation Frequency / Channel List.....	8
2.5. Test Software.....	8
2.6. EMI Suppression Device(s)/Modifications	8
2.7. Labeling Requirements	9
3. DESCRIPTION of TEST	10
3.1. Evaluation Procedure.....	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS.....	12
5. TEST EQUIPMENT CALIBRATION DATE.....	13
6. MEASUREMENT UNCERTAINTY.....	14
7. TEST RESULT	15
7.1. Summary.....	15
7.2. 6dB Bandwidth Measurement	16
7.2.1. Test Limit.....	16
7.2.2. Test Procedure used	16
7.2.3. Test Setting	16
7.2.4. Test Setup.....	16
7.2.5. Test Result	17
7.3. Output Power Measurement.....	18
7.3.1. Test Limit.....	18
7.3.2. Test Procedure Used.....	18
7.3.3. Test Setting	18
7.3.4. Test Setup.....	18
7.3.5. Test Result of Output Power.....	19
7.4. Power Spectral Density Measurement	20
7.4.1. Test Limit.....	20
7.4.2. Test Procedure Used.....	20
7.4.3. Test Setting	20
7.4.4. Test Setup.....	20
7.4.5. Test Result	21
7.5. Out-of-Band Spurious Emissions Emissions Measurement.....	22

7.5.1.	Test Limit	22
7.5.2.	Test Procedure Used	22
7.5.3.	Test Settintg	22
7.5.4.	Test Setup	22
7.5.5.	Test Result	23
7.6.	Radiated Spurious Emission Measurement	26
7.6.1.	Test Limit	26
7.6.2.	Test Procedure Used	26
7.6.3.	Test Setting	26
7.6.4.	Test Setup	28
7.6.5.	Test Result	30
7.7.	Radiated Restricted Band Edge Measurement	42
7.7.1.	Test Limit	42
7.7.2.	Test Procedure Used	42
7.7.3.	Test Setting	42
7.7.4.	Test Setup	44
7.7.5.	Test Result	45
7.8.	AC Conducted Emissions Measurement	57
7.8.1.	Test Limit	57
7.8.2.	Test Setup	57
7.8.3.	Test Result	58
8.	CONCLUSION	62
	Appendix A : Test Photograph	63
	Appendix B : External Photograph	64
	Appendix C : Internal Photograph	65

§2.1033 General Information

Applicant	TP-Link Technologies Co., Ltd.
Applicant Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China
Manufacturer	TP-Link Technologies Co., Ltd.
Manufacturer Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.247

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

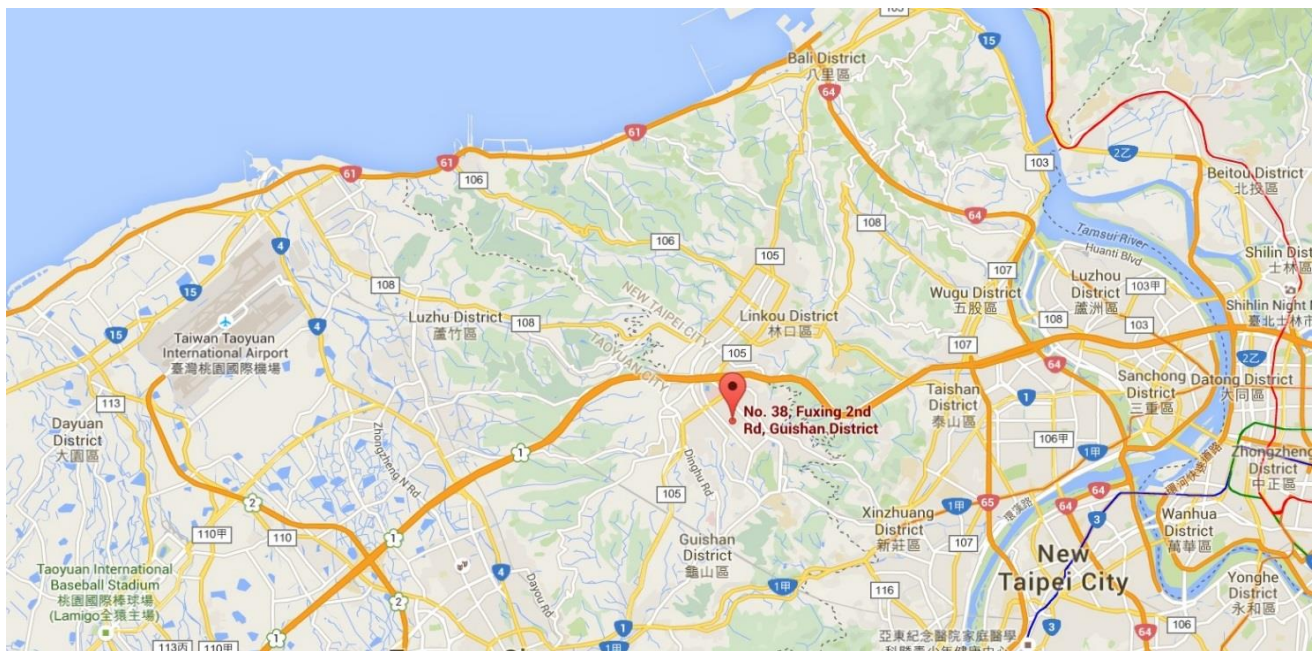

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Tapo Video Doorbell Camera
Model No.	Tapo D230
Brand Name	tp-link
EUT Identification No.:	Tapo D230S1(US) 1.0 #6-3 (Conducted) Tapo D230S1(US) 1.0 #6-5 (Radiated)
Radio Specification:	WLAN: 802.11b/g/n (1TX / 1RX) WPAN: Sub 1G
Accessories	
Adapter	Brand: Dongguan Aohai Technology Co.,Ltd Model No: A8-501000 Input: AC 100-240V~0.2A, 50-60Hz Output: DC 5V, 1A
Battery	Brand: TP-Link Corporation Limited Model No: Tapo A100

2.2. Product Specification Subjective to this Standard

Operating Frequency	920.9 MHz, 921.7MHz, 922.3MHz
Type of modulation	GFSK
Data Rate	50kbps
Antenna Type:	IFA
Antenna Gain:	-6.5dBi

2.3. Test Mode

Test Mode	Mode 1: Transmit
-----------	------------------

Note: Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.


2.4. Operation Frequency / Channel List

Channel	Frequency
1	920.9 MHz
2	921.7 MHz
3	922.3 MHz

Total Time (T _{on}) (ms)	The duration of one cycle (ms)	Duty Cycle (ms)	Average Factor (dB)
9.75	100	0.10	20.22

Note 1: Duty Cycle = Total Time (T_{on}) / 100ms.

Note 2: Average Factor = 20*Log*(1/Duty Cycle).

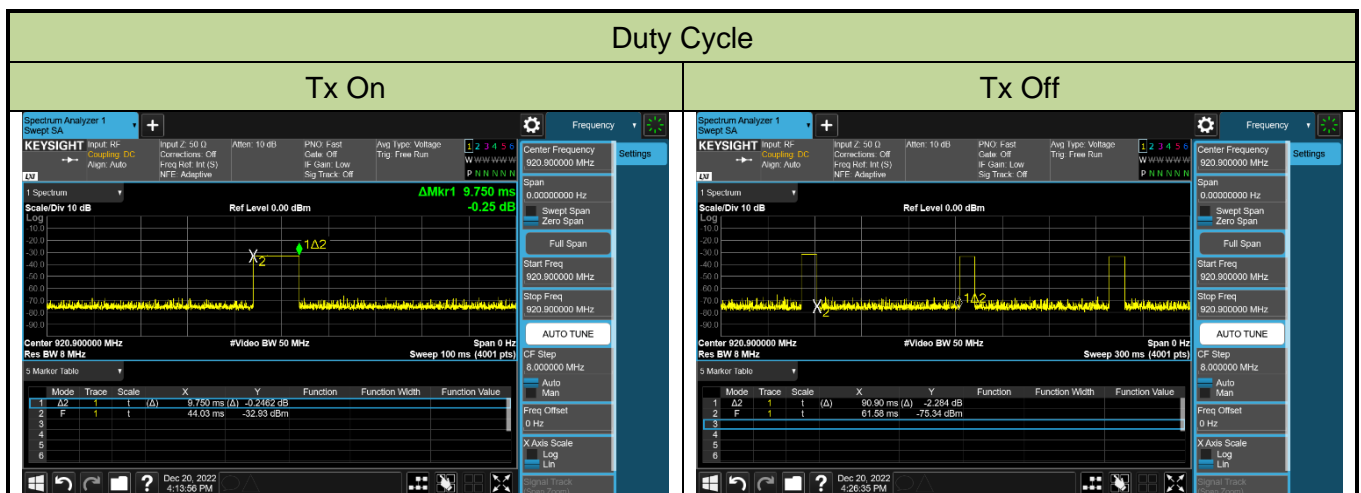

2.5. Test Software

The test utility software used during testing was “Tera Term”, the version is ver4.98

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v05 were used in the measurement of the device.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2023/12/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2023/3/9
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2023/3/16
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2023/5/24
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2023/5/10
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2023/5/9
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2023/3/30
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2023/3/30
Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2023/6/27
Cable	HUBERSUHNER	EMC105-NM-NM -3000	MRTTWE00035	1 year	2023/6/27

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2023/10/5
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2023/7/19
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2023/3/16

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.82^\circ\text{C}/ \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8.00\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Out-of-Band Emissions	Conducted $\geq 20\text{dBc}$		Pass	Section 7.5
15.205 15.209	Spurious Emission	< FCC 15.209 limits	Radiated	Pass	Section 7.6
15.205 15.209	Band Edge Measurement	$\leq 74\text{dBuV/m(Peak)}$ $\leq 54\text{dBuV/m(Average)}$		Pass	Section 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	N/A	Section 7.8

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 4) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

ANSI C63.10-2013 Section 11.8

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

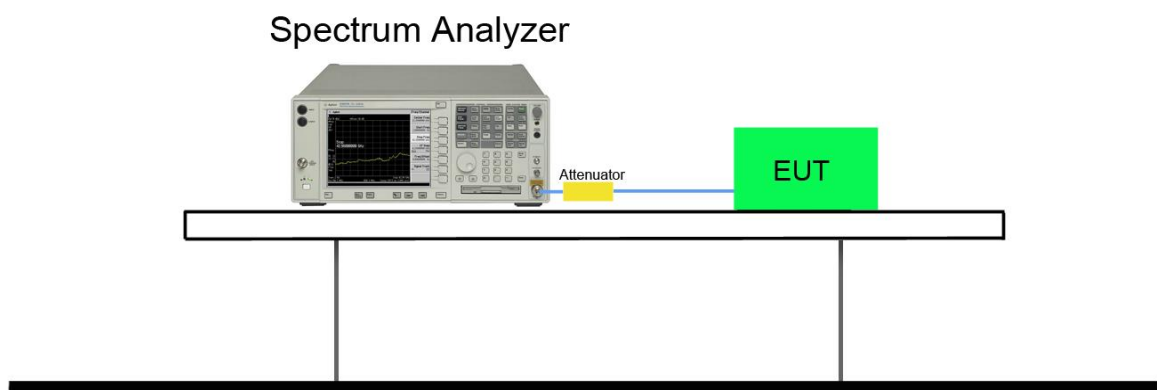

7.2.5. Test Result

Test Mode	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)	Result
SUB 1G_TX	920.9	556.80	≥ 500	Pass
	921.7	554.40	≥ 500	Pass
	922.3	555.40	≥ 500	Pass



7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used

ANSI C63.10-2013 Section 11.9.1.3

ANSI C63.10-2013 Section 11.9.2.3

7.3.3. Test Setting


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

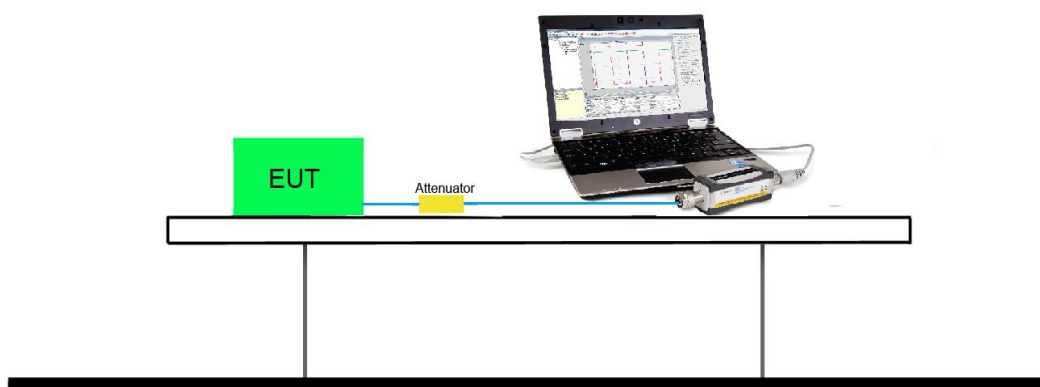

7.3.5. Test Result of Output Power

Test Mode	Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Power Limit (dBm)
SUB 1G_TX	920.9	16.53	16.67	< 30
	921.7	16.54	16.68	< 30
	922.3	16.54	16.67	< 30

Note: Output power = Reading value on power meter + cable loss.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


ANSI C63.10-2013 Section 11.10.2

7.4.3. Test Setting

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: 3 kHz.
- d) Set the VBW $\geq 3^* \text{ RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

7.4.4. Test Setup

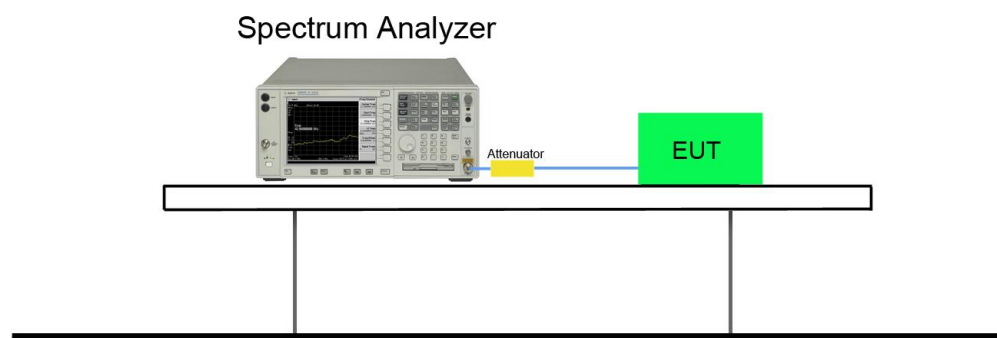

7.4.5. Test Result

Test Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
SUB 1G_TX	920.9	7.45	≤ 8	Pass
	921.7	7.47	≤ 8	Pass
	922.3	7.45	≤ 8	Pass

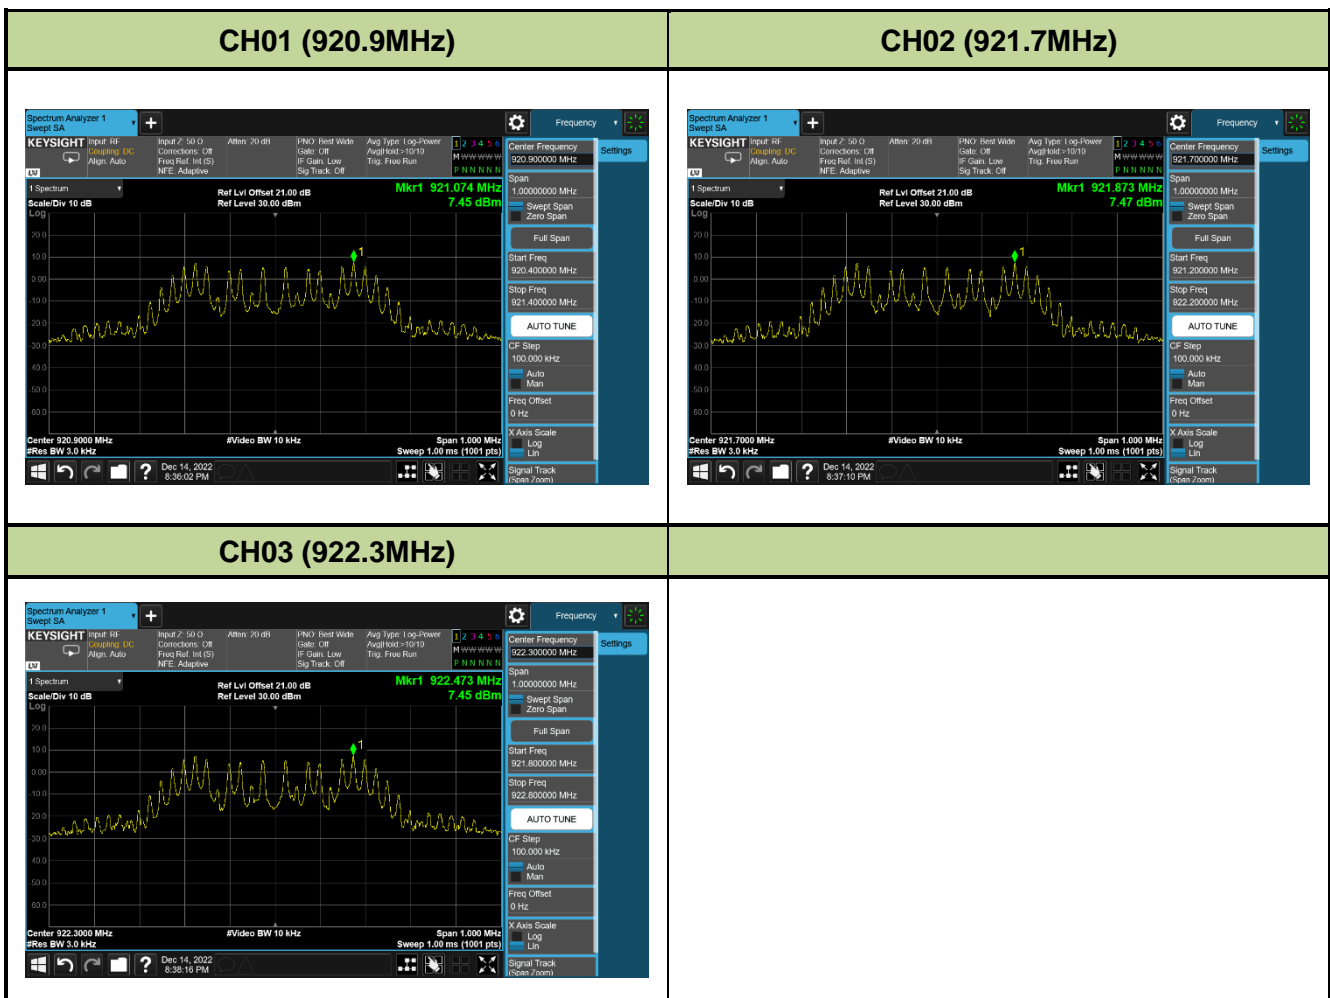

7.5. Out-of-Band Spurious Emissions Emissions Measurement

7.5.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.5.2. Test Procedure Used

ANSI C63.10-2013 Section 11.11

7.5.3. Test Setting

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

7.5.4. Test Setup

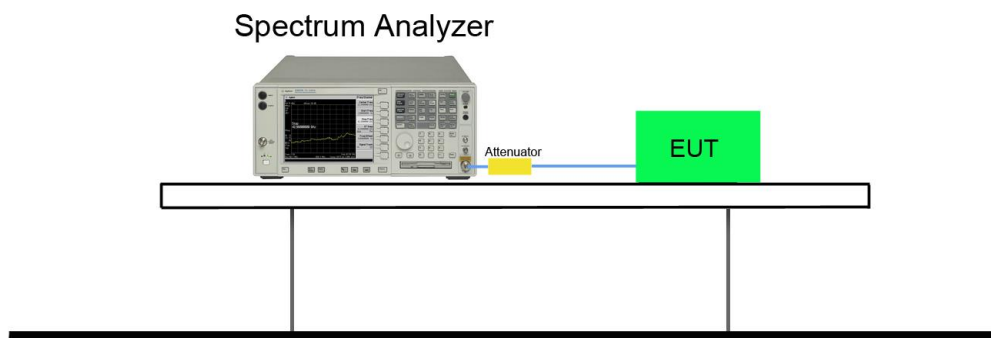


7.5.5. Test Result

Test Mode	Frequency (MHz)	Limit	Result
SUB 1G_TX	920.9	20dBc	Pass
	921.7	20dBc	Pass
	922.3	20dBc	Pass


CH01 (920.9MHz)




CH01 (920.9MHz)

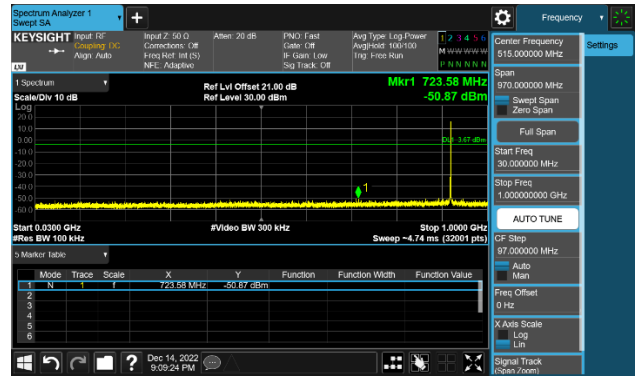


CH01 (920.9MHz)

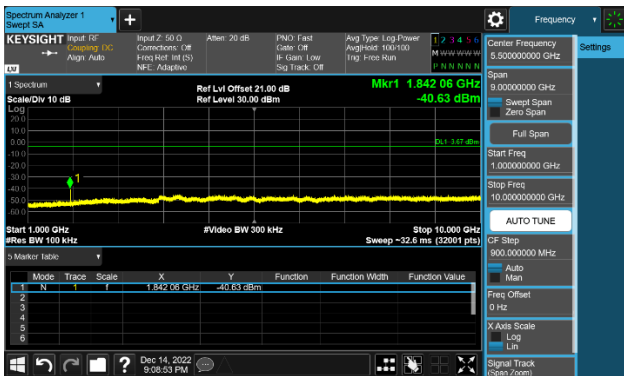


CH02 (921.7MHz)

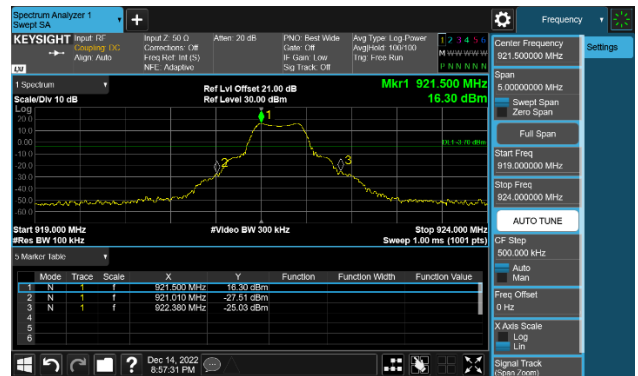

CH02 (921.7MHz)

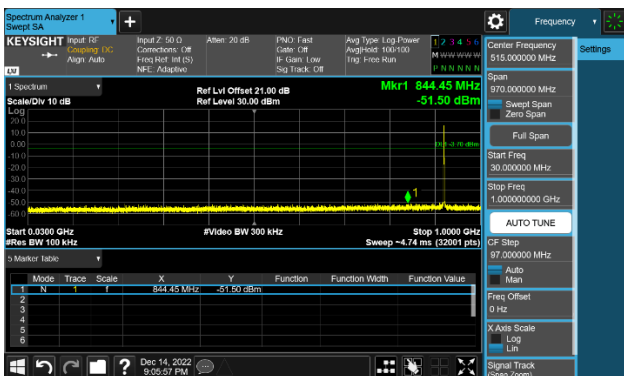


CH02 (921.7MHz)

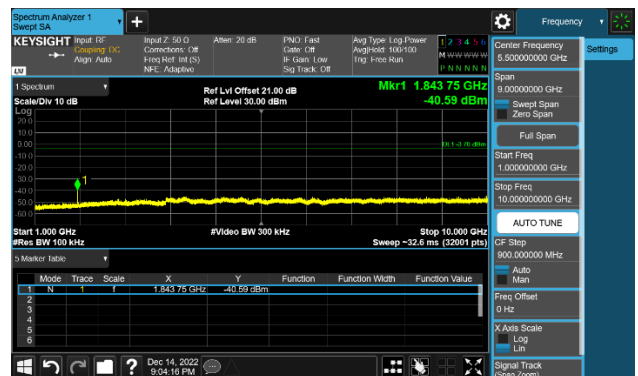


CH03 (922.3MHz)



CH03 (922.3MHz)

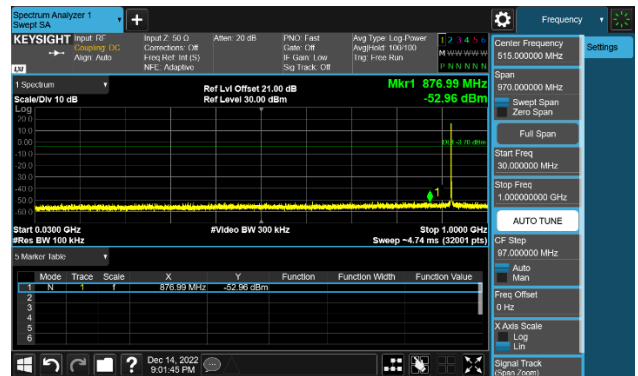

CH03 (922.3MHz)

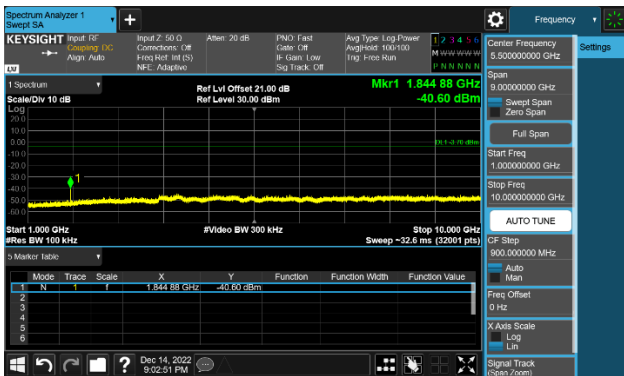

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz

4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW \geq 1/T
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

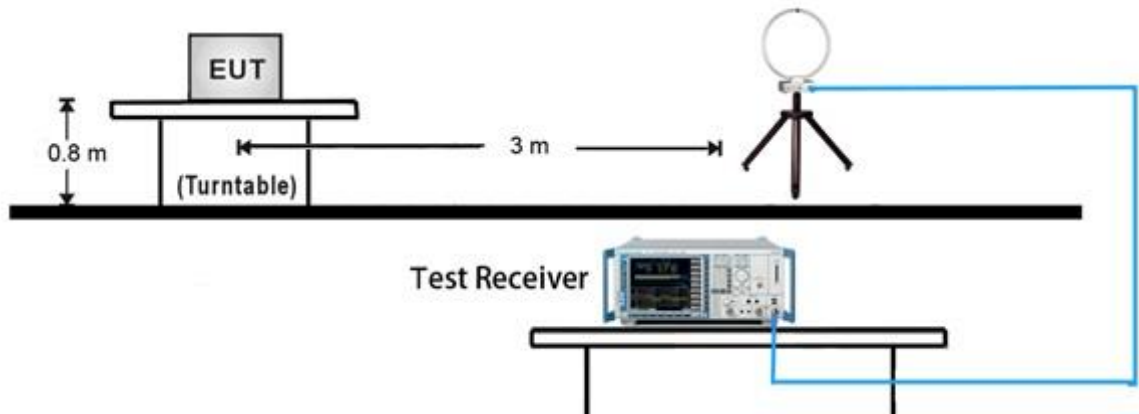


30MHz ~ 1GHz Test Setup:

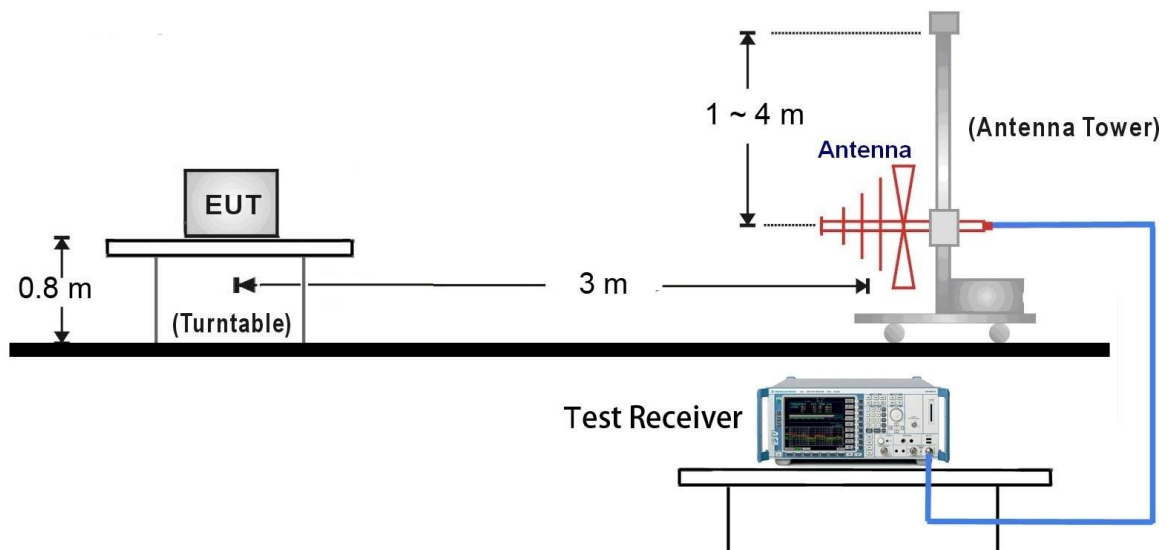

1GHz ~ 18GHz Test Setup:

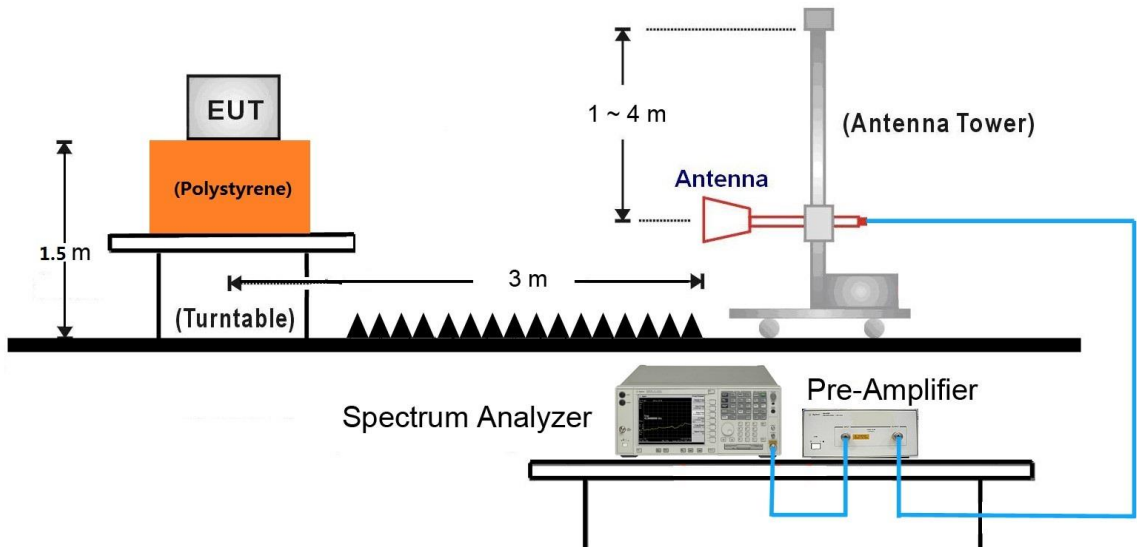


18GHz ~25GHz Test Setup:

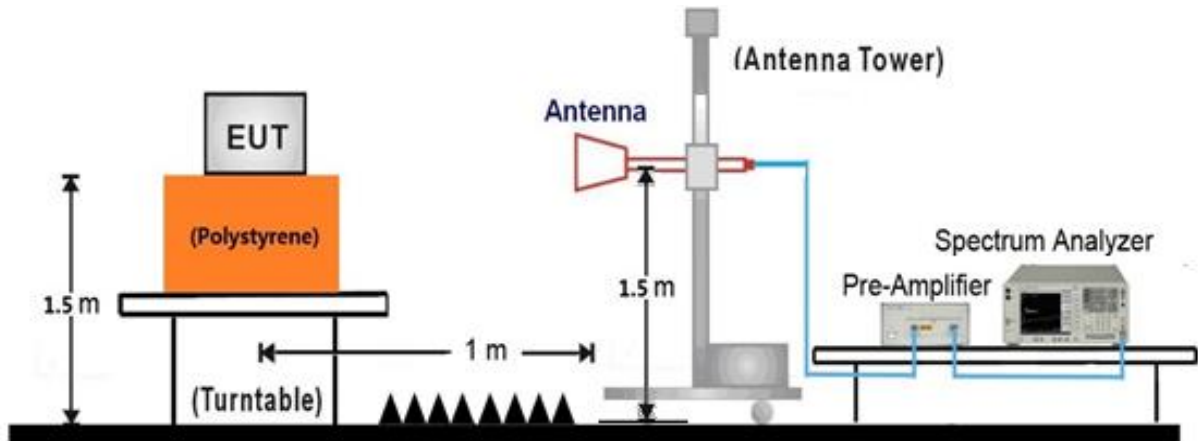

7.6.5. Test Result

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-13
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	By Battery

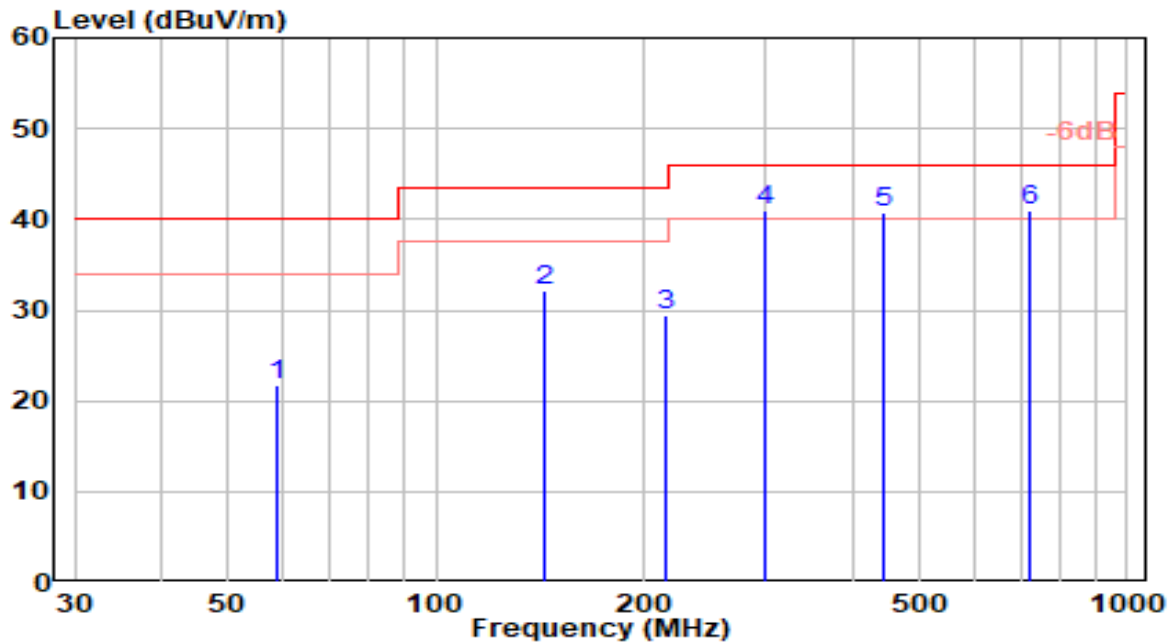


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	59.100	1.53	20.19	21.72	-18.29	40.00	154	0	Peak
2	143.490	16.59	15.62	32.21	-11.29	43.50	150	55	Peak
3	215.270	10.58	18.86	29.43	-14.07	43.50	150	48	Peak
4	* 299.660	19.72	21.35	41.07	-4.93	46.00	100	110	Peak
5	444.190	16.28	24.38	40.67	-5.33	46.00	200	121	Peak
6	720.640	11.70	29.20	40.90	-5.10	46.00	100	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-13
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	By Battery

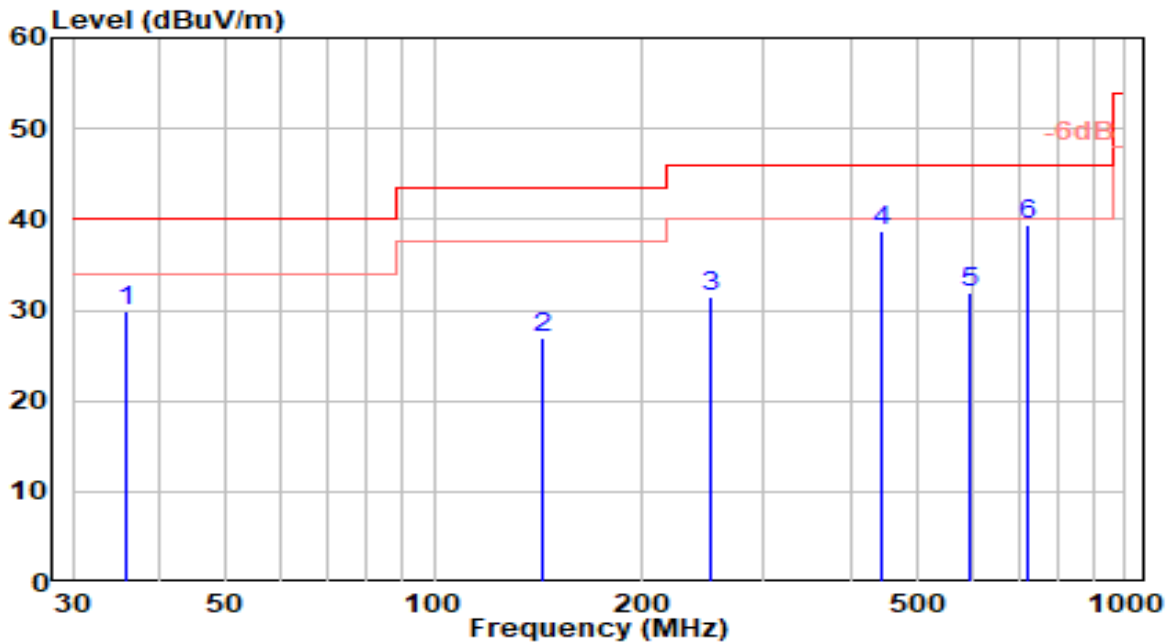


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	35.820	11.05	18.84	29.89	-10.11	40.00	100	112	QP
2	143.490	11.33	15.62	26.96	-16.54	43.50	200	332	QP
3	252.130	10.55	20.81	31.37	-14.63	46.00	150	358	QP
4	444.190	14.31	24.38	38.69	-7.31	46.00	200	255	QP
5	598.420	4.26	27.66	31.92	-14.08	46.00	200	143	QP
6	* 720.640	10.12	29.20	39.32	-6.68	46.00	200	112	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-13
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_RX_921.7MHz	Test Voltage	By Battery

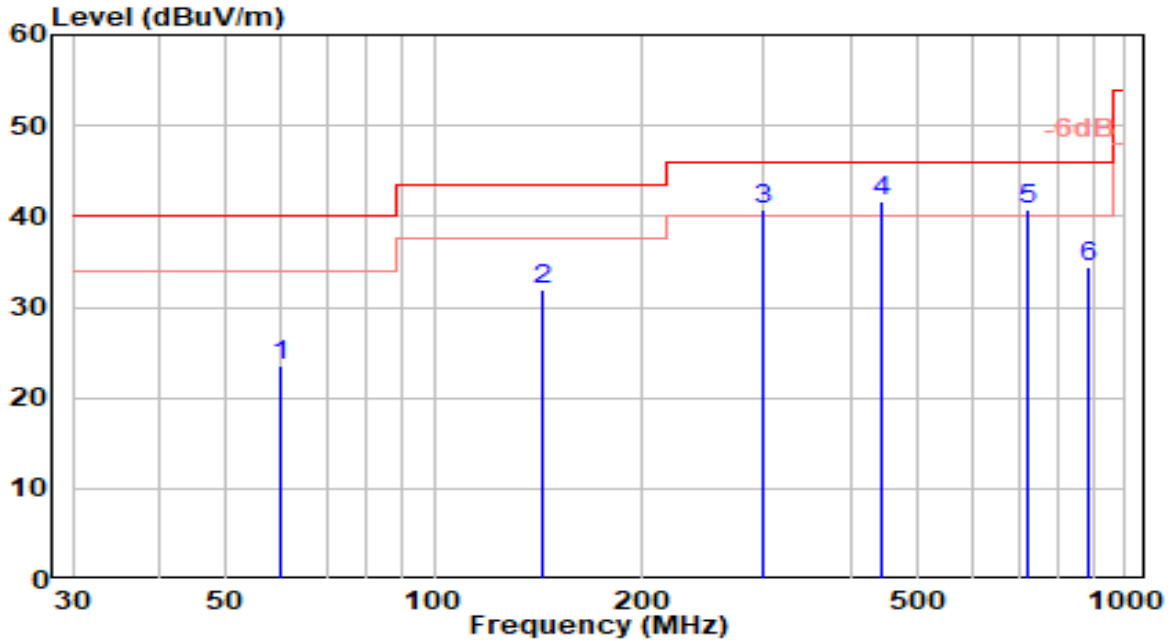


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	60.070	3.46	20.02	23.49	-16.51	40.00	200	358	QP
2	143.490	16.26	15.62	31.88	-11.62	43.50	200	56	QP
3	299.660	19.45	21.35	40.80	-5.20	46.00	100	123	QP
4	* 444.190	17.34	24.38	41.73	-4.27	46.00	200	134	QP
5	720.640	11.51	29.20	40.71	-5.29	46.00	100	0	QP
6	888.450	3.05	31.47	34.52	-11.48	46.00	150	52	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-13
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_RX_921.7MHz	Test Voltage	By Battery

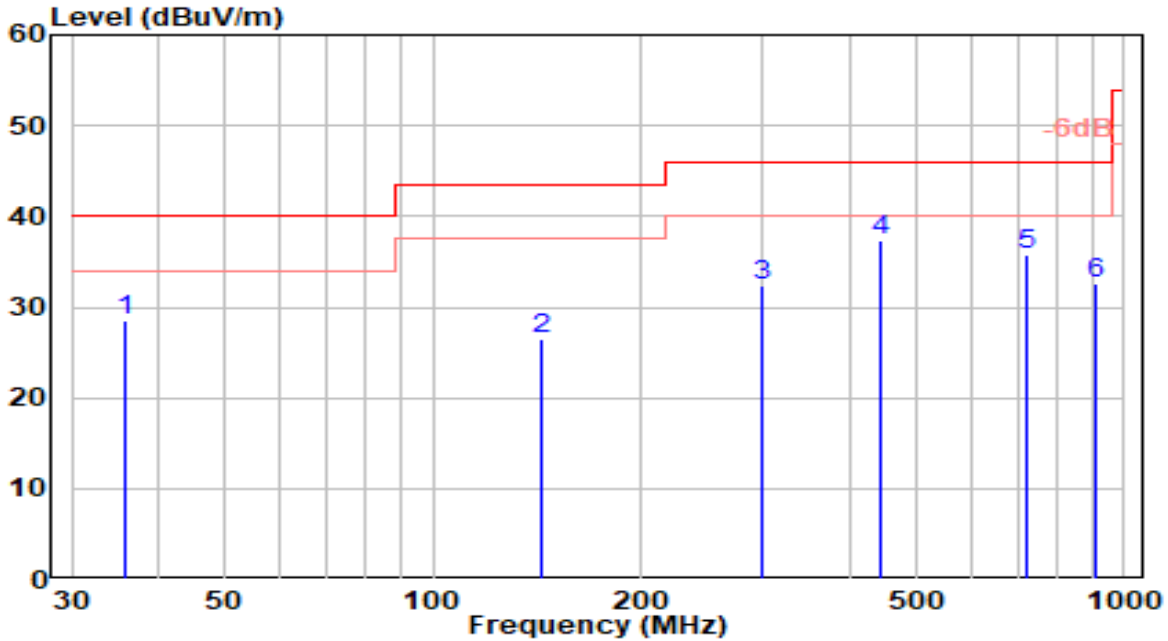


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	35.820	9.73	18.84	28.57	-11.43	40.00	100	88	QP
2	143.490	10.79	15.62	26.41	-17.09	43.50	200	321	QP
3	299.660	11.06	21.35	32.41	-13.59	46.00	100	273	QP
4	* 444.190	12.87	24.38	37.26	-8.74	46.00	200	0	QP
5	720.640	6.64	29.20	35.84	-10.16	46.00	100	248	QP
6	912.700	0.96	31.64	32.60	-13.40	46.00	200	360	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-20
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_920.9MHz	Test Voltage	By Battery

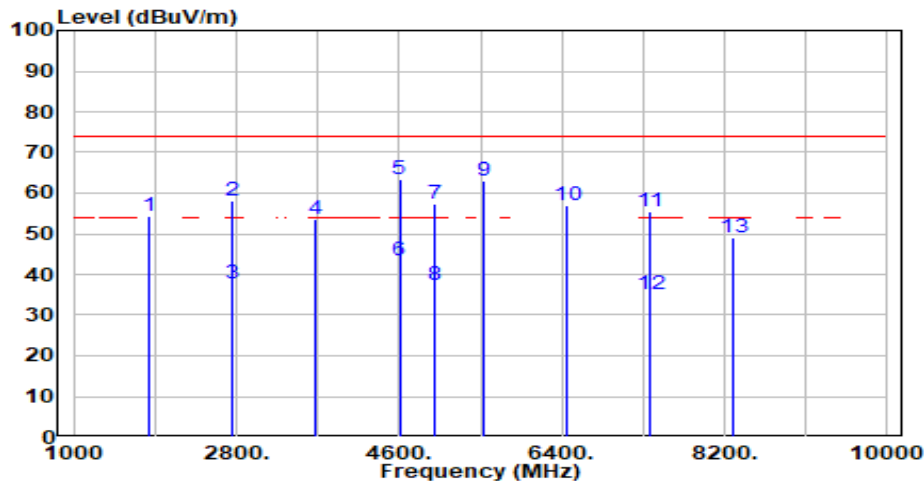


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1841.800	61.15	-6.65	54.49	-19.51	74.00	210	0	Peak
2	2762.700	61.74	-3.70	58.04	-15.96	74.00	104	198	Peak
3	2762.700	N/A	N/A	37.82	-16.18	54.00	104	198	Average
4	3683.600	55.41	-1.73	53.69	-20.31	74.00	100	230	Peak
5	* 4604.500	63.39	0.10	63.49	-10.51	74.00	203	281	Peak
6	4604.500	N/A	N/A	43.27	-10.73	54.00	203	281	Average
7	4988.588	56.86	0.59	57.45	-16.55	74.00	200	289	Peak
8	4988.588	N/A	N/A	37.23	-16.77	54.00	200	289	Average
9	5525.400	61.79	1.05	62.84	-11.16	74.00	300	222	Peak
10	6446.300	52.14	4.83	56.97	-17.03	74.00	300	258	Peak
11	7367.200	49.65	5.78	55.43	-18.57	74.00	110	360	Peak
12	7367.200	N/A	N/A	35.21	-18.79	54.00	110	360	Average
13	8288.100	43.56	5.50	49.06	-24.94	74.00	200	275	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Average factor (20Log(1/Duty Cycle)) is 20.22dB.
- Average Measurement = Peak Measurement - Average factor.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-20
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_920.9MHz	Test Voltage	By Battery

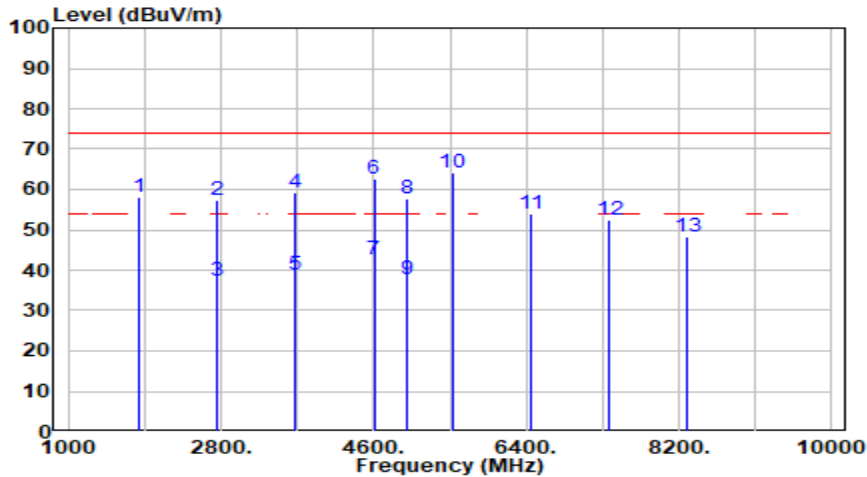


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1841.800	64.89	-6.65	58.23	-15.77	74.00	100	304	Peak
2	2762.700	61.23	-3.70	57.53	-16.47	74.00	103	155	Peak
3	2762.700	N/A	N/A	37.31	-16.69	54.00	103	155	Average
4	3683.600	60.91	-1.73	59.18	-14.82	74.00	203	234	Peak
5	3683.600	N/A	N/A	38.96	-15.04	54.00	203	234	Average
6	4604.500	62.64	0.10	62.74	-11.26	74.00	336	333	Peak
7	4604.500	N/A	N/A	42.52	-11.48	54.00	336	333	Average
8	4988.500	57.23	0.59	57.82	-16.18	74.00	200	101	Peak
9	4988.500	N/A	N/A	37.60	-16.40	54.00	200	101	Average
10	* 5525.400	63.25	1.05	64.30	-9.70	74.00	200	334	Peak
11	6446.300	49.08	4.83	53.91	-20.09	74.00	300	316	Peak
12	7367.235	46.74	5.78	52.51	-21.49	74.00	200	319	Peak
13	8288.100	42.89	5.50	48.39	-25.61	74.00	200	71	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Average factor (20Log(1/Duty Cycle)) is 20.22dB.
- Average Measurement = Peak Measurement - Average factor.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-20
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	By Battery

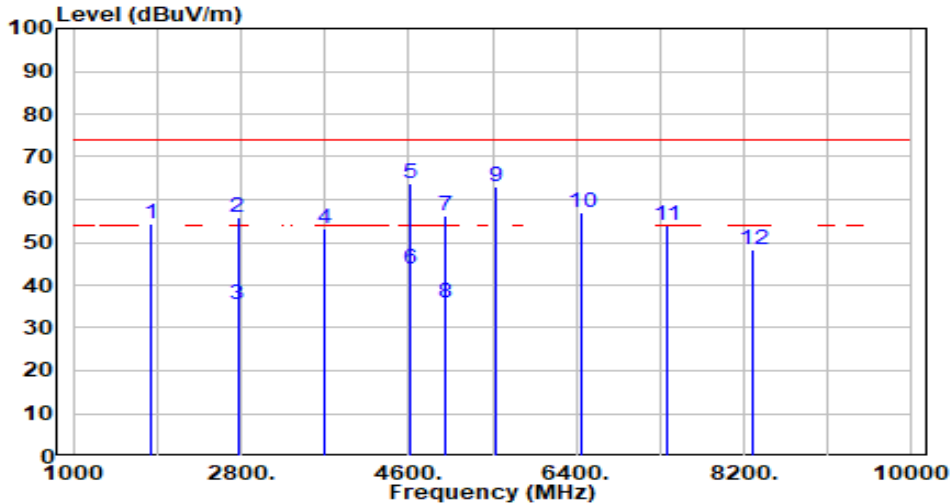


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1843.400	60.91	-6.64	54.26	-19.74	74.00	100	181	Peak
2	2765.100	59.48	-3.69	55.79	-18.21	74.00	100	199	Peak
3	2765.100	N/A	N/A	35.57	-18.43	54.00	100	199	Average
4	3686.800	55.07	-1.71	53.35	-20.65	74.00	100	228	Peak
5 *	4608.500	63.74	0.10	63.84	-10.16	74.00	206	261	Peak
6	4608.500	N/A	N/A	43.62	-10.38	54.00	206	261	Average
7	4986.471	55.57	0.58	56.15	-17.85	74.00	200	283	Peak
8	4986.471	N/A	N/A	35.93	-18.07	54.00	200	283	Average
9	5530.200	61.89	1.07	62.95	-11.05	74.00	200	301	Peak
10	6451.900	52.02	4.84	56.86	-17.14	74.00	300	262	Peak
11	7373.600	48.19	5.78	53.96	-20.04	74.00	200	328	Peak
12	8295.300	42.62	5.51	48.13	-25.87	74.00	200	280	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Average factor (20Log(1/Duty Cycle)) is 20.22dB.
- Average Measurement = Peak Measurement - Average factor.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-20
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	By Battery

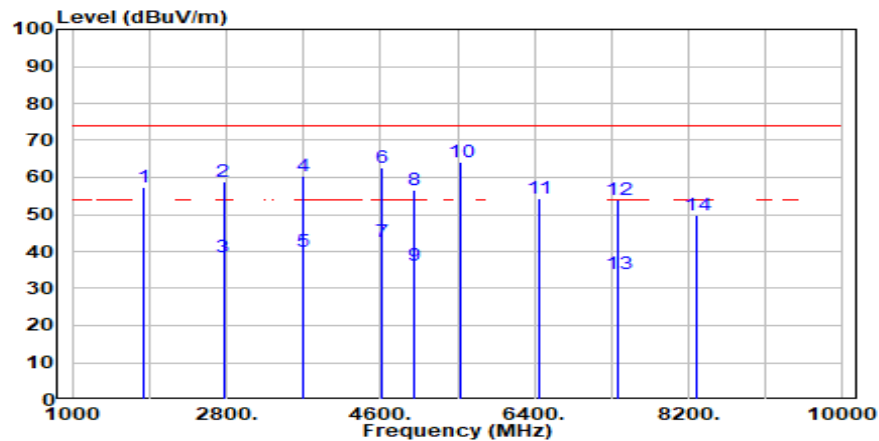


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1843.400	64.16	-6.64	57.52	-16.48	74.00	100	300	Peak
2	2765.100	62.41	-3.69	58.72	-15.28	74.00	105	195	Peak
3	2765.100	N/A	N/A	38.50	-15.50	54.00	105	195	Average
4	3686.800	62.04	-1.71	60.33	-13.67	74.00	117	281	Peak
5	3686.800	N/A	N/A	40.11	-13.89	54.00	117	281	Average
6	4608.500	62.68	0.10	62.78	-11.22	74.00	315	34	Peak
7	4608.500	N/A	N/A	42.56	-11.44	54.00	315	34	Average
8	4986.400	55.92	0.58	56.51	-17.49	74.00	200	104	Peak
9	4986.400	N/A	N/A	36.29	-17.71	54.00	200	104	Average
10	* 5530.200	63.13	1.07	64.20	-9.80	74.00	200	332	Peak
11	6451.900	49.33	4.84	54.17	-19.83	74.00	300	312	Peak
12	7373.600	48.27	5.78	54.04	-19.96	74.00	200	335	Peak
13	7373.600	N/A	N/A	33.82	-20.18	54.00	200	335	Average
14	8295.300	44.17	5.51	49.68	-24.32	74.00	200	65	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Average factor (20Log(1/Duty Cycle)) is 20.22dB.
- Average Measurement = Peak Measurement - Average factor.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-20
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_922.3MHz	Test Voltage	By Battery

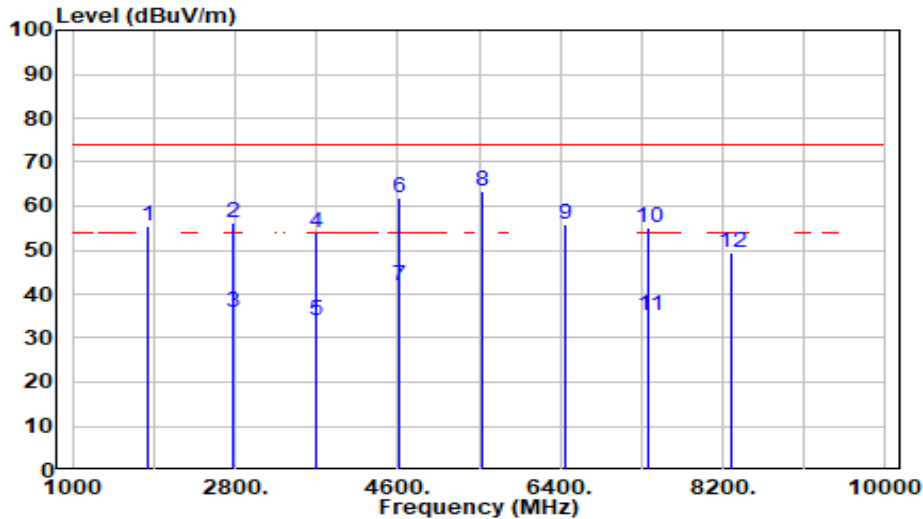


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1844.600	62.08	-6.64	55.44	-18.56	74.00	200	47	Peak
2	2766.900	59.83	-3.69	56.15	-17.85	74.00	100	169	Peak
3	2766.900	N/A	N/A	35.93	-18.07	54.00	100	169	Average
4	3689.200	55.80	-1.70	54.09	-19.91	74.00	100	219	Peak
5	3689.200	N/A	N/A	33.87	-20.13	54.00	100	219	Average
6	4611.500	61.84	0.10	61.94	-12.06	74.00	200	266	Peak
7	4611.500	N/A	N/A	41.72	-12.28	54.00	200	266	Average
8	* 5533.800	62.47	1.08	63.55	-10.45	74.00	200	210	Peak
9	6456.100	51.16	4.85	56.01	-17.99	74.00	300	260	Peak
10	7378.400	49.44	5.77	55.21	-18.79	74.00	100	184	Peak
11	7378.400	N/A	N/A	34.99	-19.01	54.00	100	184	Average
12	8300.700	43.86	5.52	49.38	-24.62	74.00	200	272	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Average factor (20Log(1/Duty Cycle)) is 20.22dB.
- Average Measurement = Peak Measurement - Average factor.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-20
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_922.3MHz	Test Voltage	By Battery

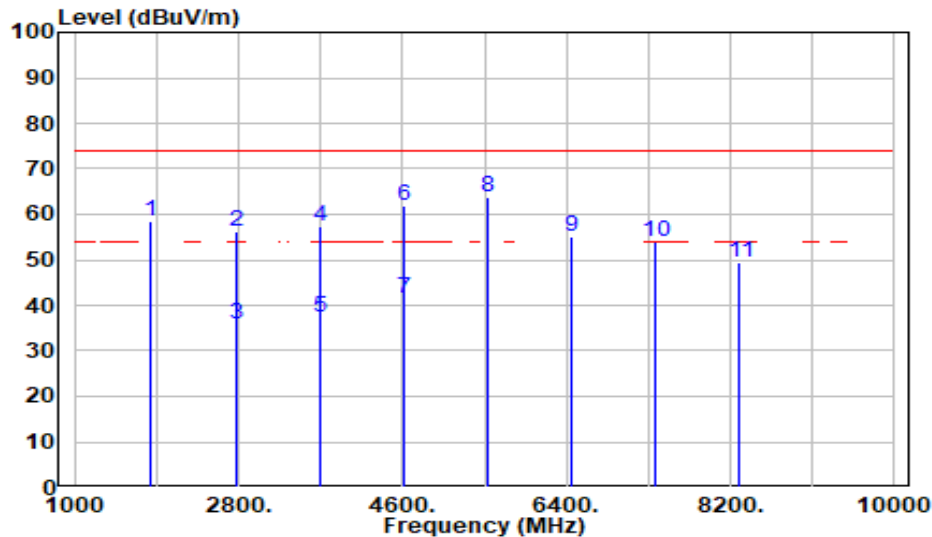


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1844.600	65.04	-6.64	58.41	-15.59	74.00	100	319	Peak
2	2766.900	59.83	-3.69	56.14	-17.86	74.00	100	198	Peak
3	2766.900	N/A	N/A	35.92	-18.08	54.00	100	198	Average
4	3689.200	59.17	-1.70	57.46	-16.54	74.00	200	241	Peak
5	3689.200	N/A	N/A	37.24	-16.76	54.00	200	241	Average
6	4611.500	61.72	0.10	61.82	-12.18	74.00	300	327	Peak
7	4611.500	N/A	N/A	41.60	-12.40	54.00	300	327	Average
8	* 5533.800	62.74	1.08	63.82	-10.18	74.00	200	311	Peak
9	6456.118	50.39	4.85	55.24	-18.76	74.00	300	300	Peak
10	7378.400	48.02	5.77	53.80	-20.20	74.00	200	337	Peak
11	8300.700	44.01	5.52	49.52	-24.48	74.00	200	328	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Average factor (20Log(1/Duty Cycle)) is 20.22dB.
- Average Measurement = Peak Measurement - Average factor.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-20
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_RX_921.7MHz	Test Voltage	By Battery

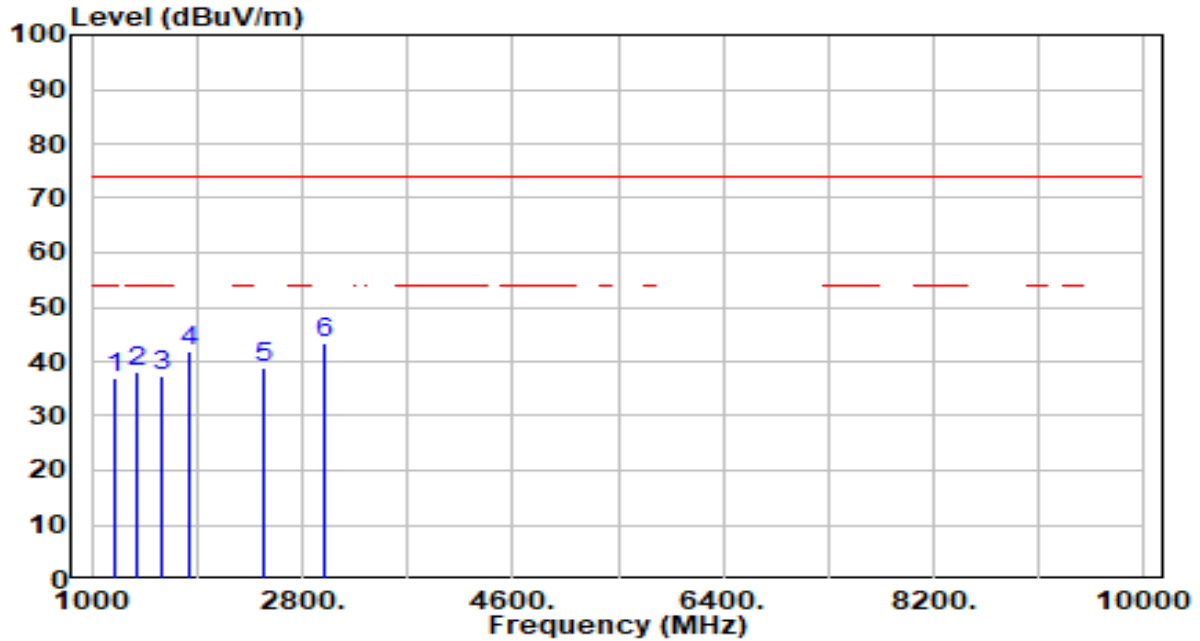


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1199.059	44.66	-7.50	37.15	-36.85	74.00	100	257	Peak
2	1392.294	45.01	-6.89	38.12	-35.88	74.00	300	288	Peak
3	1599.823	44.48	-7.17	37.31	-36.69	74.00	287	0	Peak
4	1843.882	48.36	-6.64	41.72	-32.28	74.00	300	279	Peak
5	2465.941	43.74	-4.83	38.91	-35.09	74.00	300	262	Peak
6	* 2994.823	46.64	-3.08	43.56	-30.44	74.00	100	188	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-20
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_RX_921.7MHz	Test Voltage	By Battery

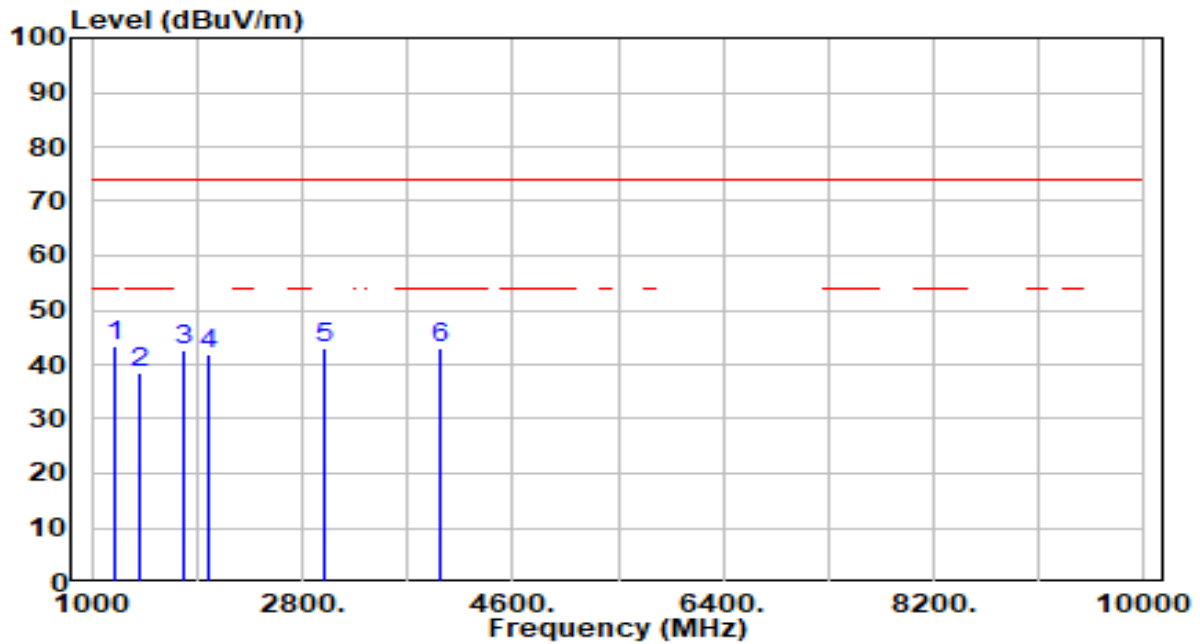

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	1195.882	51.07	-7.50	43.56	-30.44	74.00	100	3	Peak
2		1400.235	45.20	-6.87	38.33	-35.67	74.00	200	353	Peak
3		1792.529	49.39	-6.93	42.46	-31.54	74.00	300	232	Peak
4		2000.059	47.62	-5.66	41.96	-32.04	74.00	300	220	Peak
5		2991.647	46.05	-3.09	42.96	-31.04	74.00	300	277	Peak
6		3985.882	43.64	-0.77	42.87	-31.13	74.00	100	203	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

30MHz ~ 1GHz Test Setup:

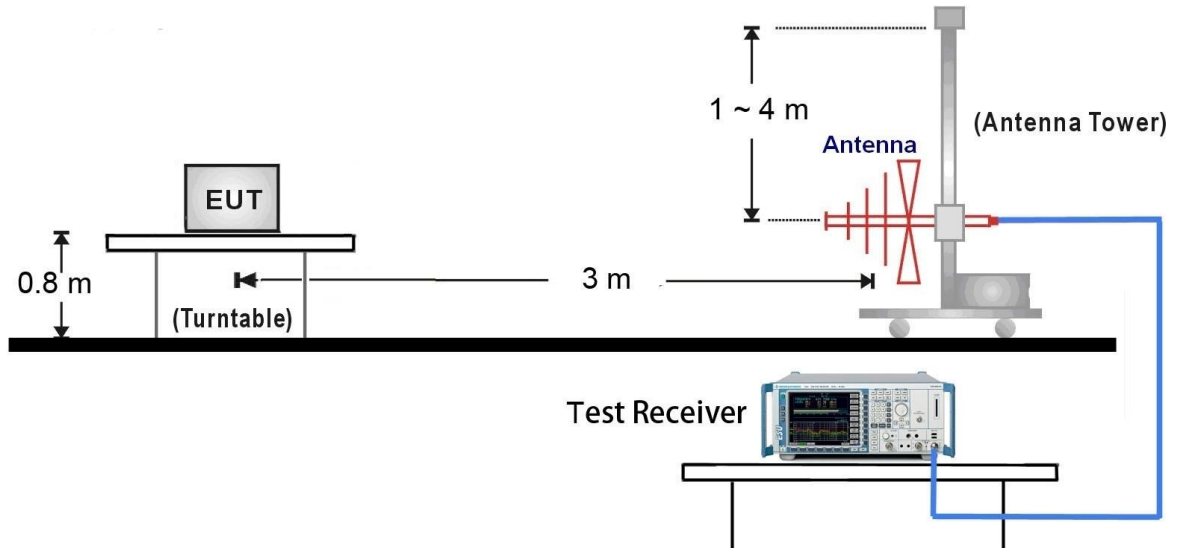

7.7.5. Test Result

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_920.9MHz	Test Voltage	By Battery

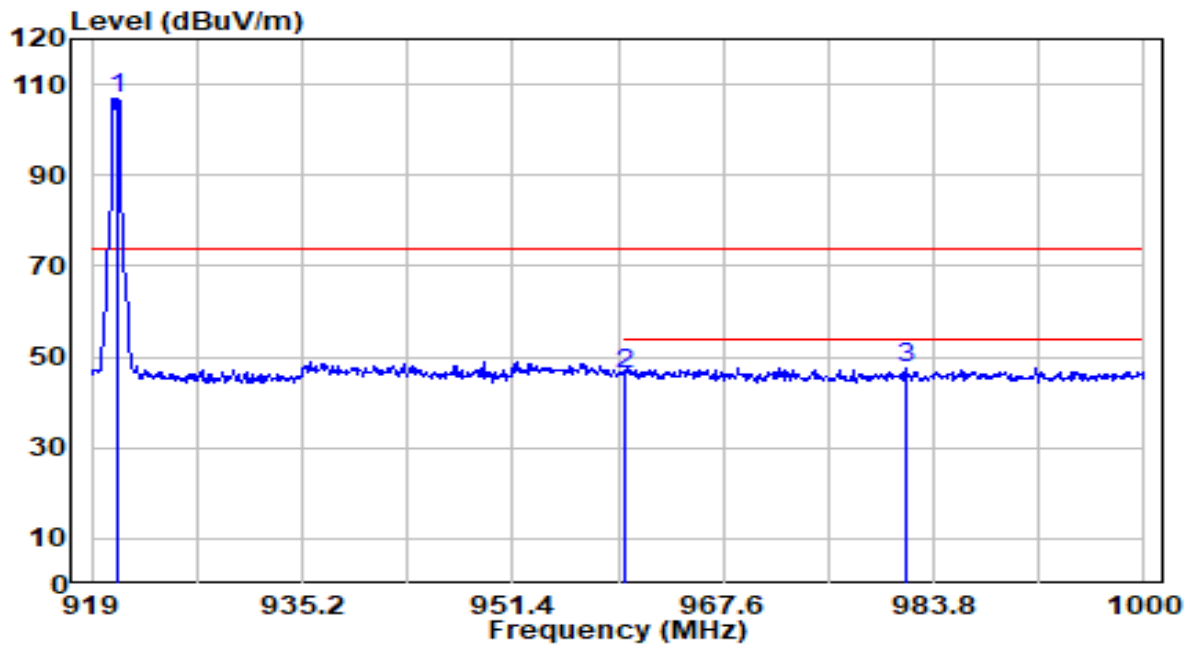


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	921.025	75.07	31.64	106.70	N/A	N/A	196	80	Peak
2	960.000	14.30	31.73	46.03	-27.97	74.00	196	80	Peak
3	* 981.613	15.79	31.94	47.73	-26.27	74.00	196	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_920.9MHz	Test Voltage	By Battery

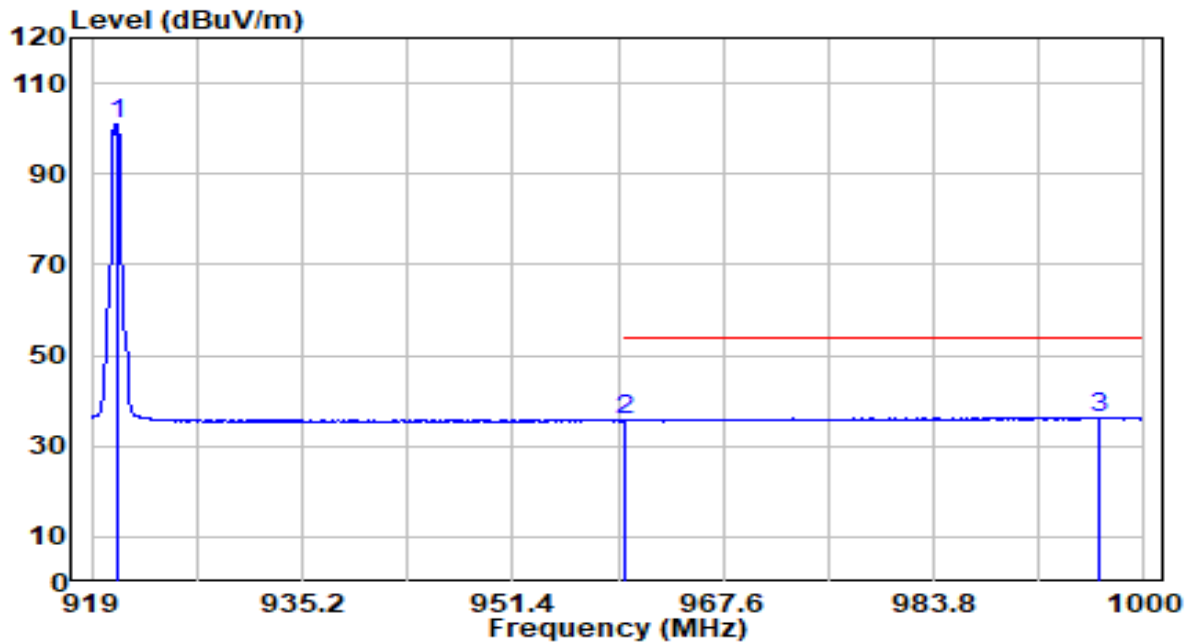


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	921.025	69.44	31.64	101.08	N/A	N/A	196	80	Average
2	960.000	3.99	31.73	35.72	-18.28	54.00	196	80	Average
3	* 996.598	4.17	32.09	36.25	-17.75	54.00	196	80	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_920.9MHz	Test Voltage	By Battery

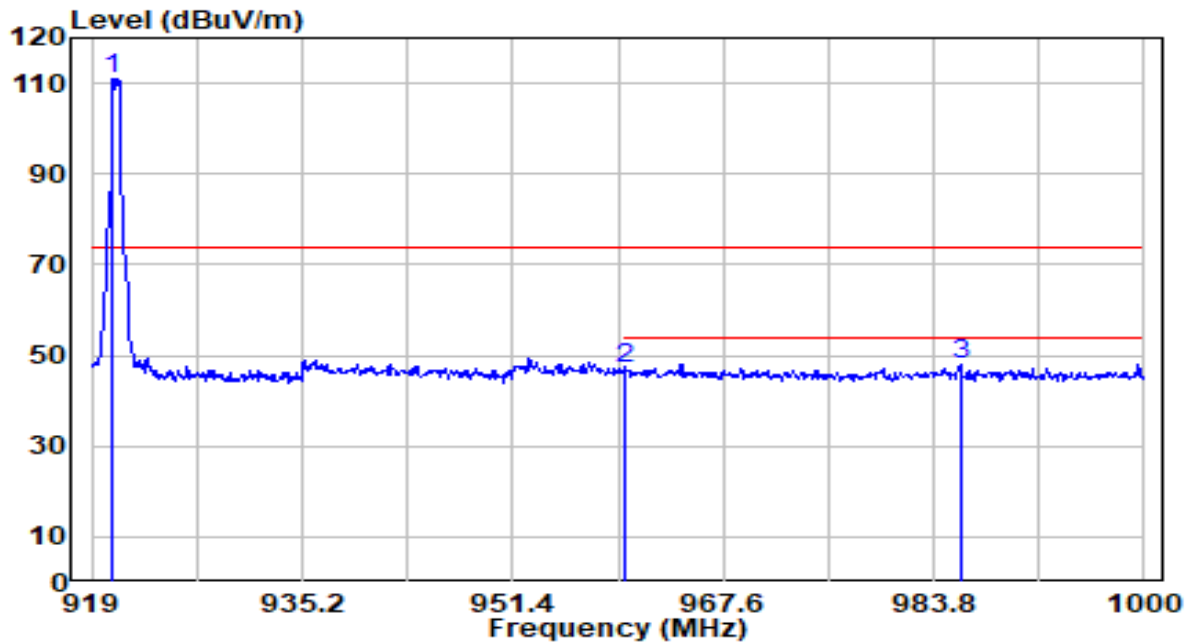


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	920.620	79.18	31.64	110.81	N/A	N/A	112	22	Peak
2	960.000	15.14	31.73	46.87	-27.13	74.00	112	22	Peak
3	* 985.825	15.97	31.98	47.95	-26.05	74.00	112	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_920.9MHz	Test Voltage	By Battery

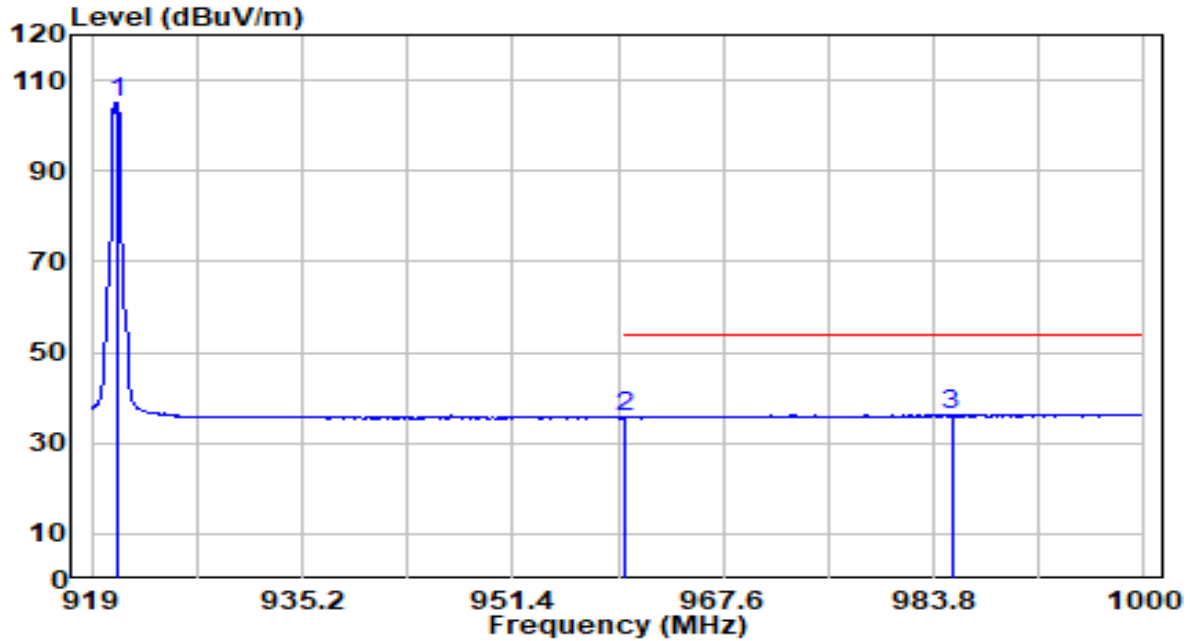


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	921.025	73.53	31.64	105.17	N/A	N/A	112	22	Average
2	960.000	4.05	31.73	35.78	-18.22	54.00	112	22	Average
3	* 985.177	4.19	31.97	36.17	-17.83	54.00	112	22	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	By Battery

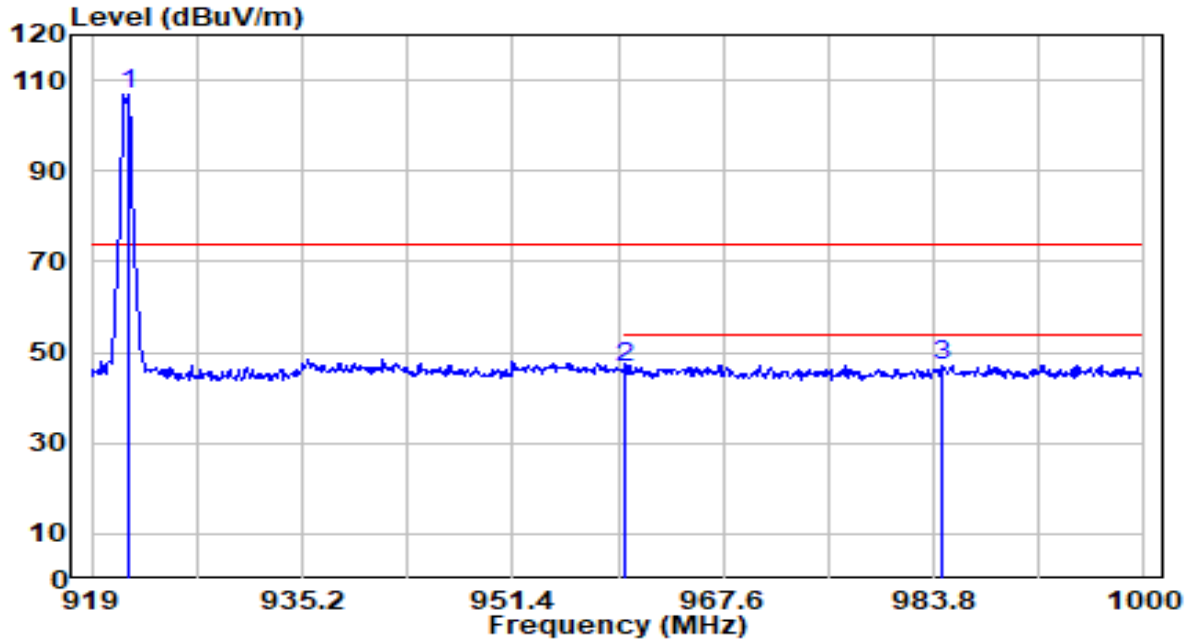


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	921.835	75.45	31.64	107.08	N/A	N/A	194	79	Peak
2	960.000	14.74	31.73	46.47	-27.53	74.00	194	79	Peak
3	* 984.529	15.31	31.97	47.28	-26.72	74.00	194	79	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	By Battery

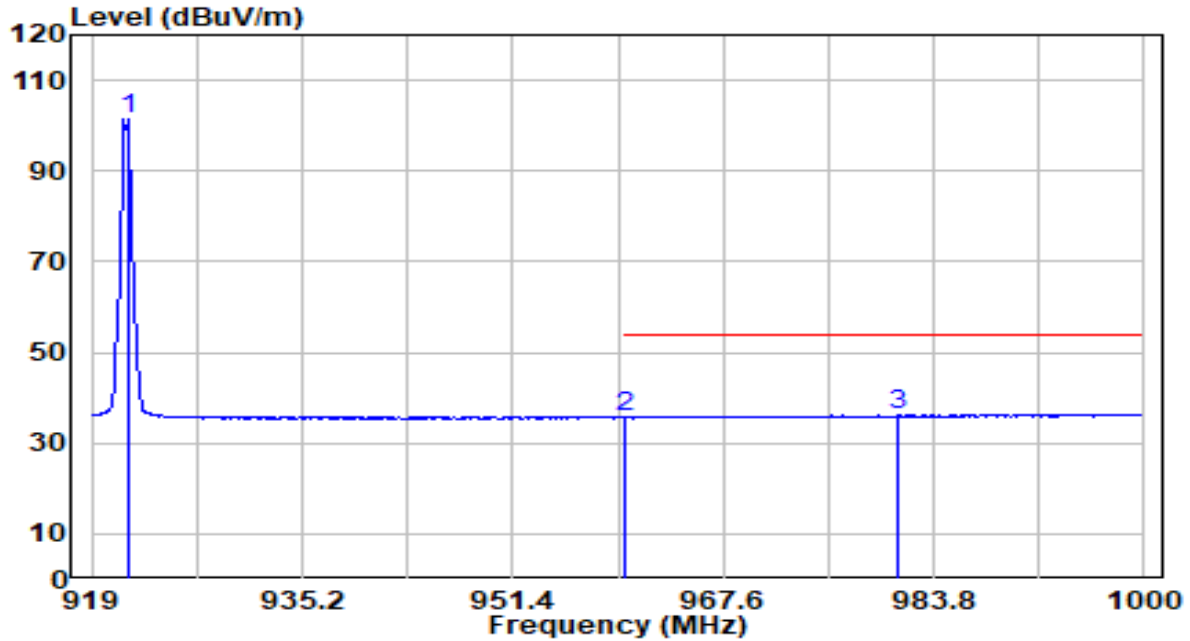


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	921.835	69.78	31.64	101.41	N/A	N/A	194	79	Average
2	960.000	4.10	31.73	35.83	-18.17	54.00	194	79	Average
3	* 981.127	4.16	31.94	36.10	-17.90	54.00	194	79	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	By Battery

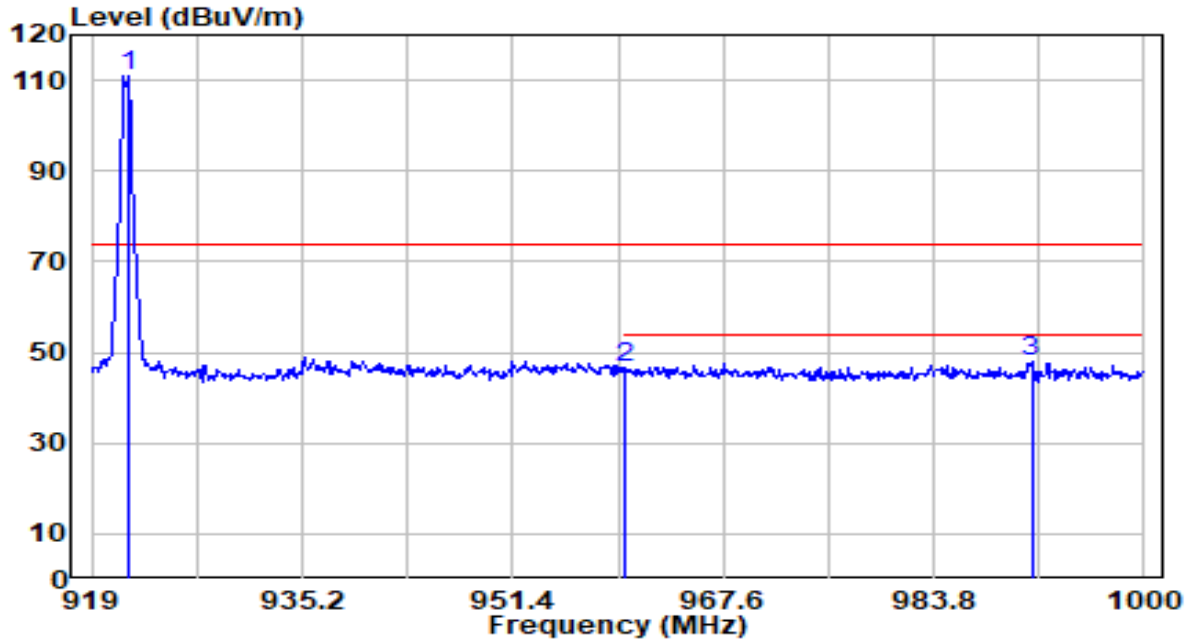


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	921.835	79.12	31.64	110.76	N/A	N/A	112	22	Peak
2	* 960.000	14.70	31.73	46.43	-27.57	74.00	112	22	Peak
3	991.333	15.78	32.04	47.81	-26.19	74.00	112	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	By Battery

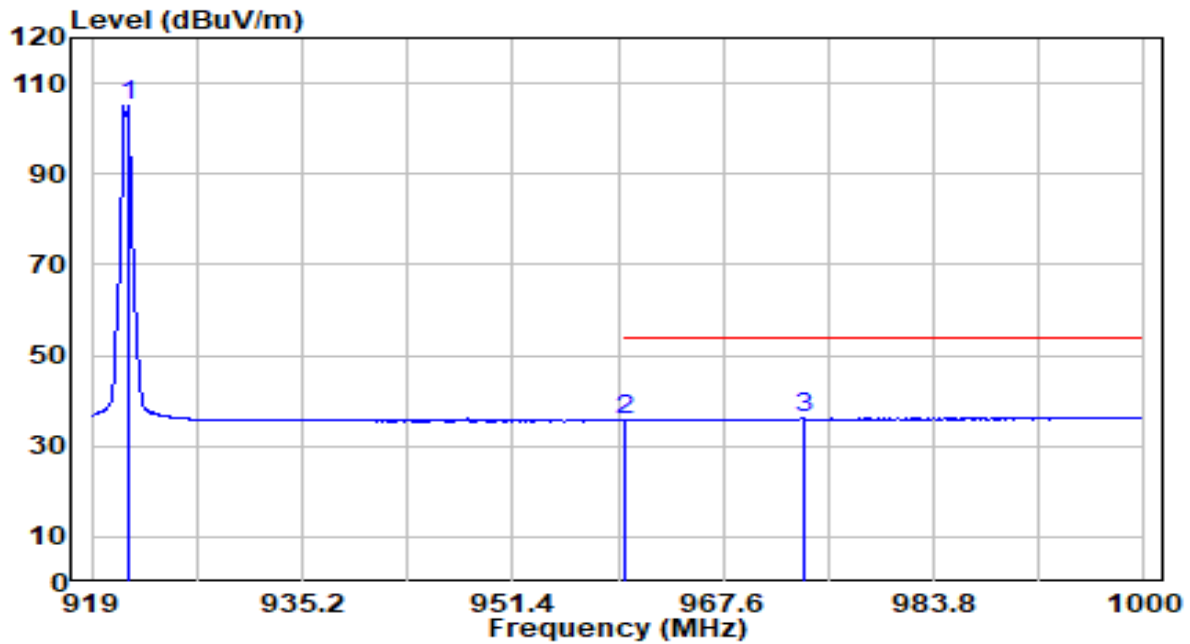


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	921.835	73.41	31.64	105.05	N/A	N/A	112	22	Average
2	960.000	4.07	31.73	35.80	-18.20	54.00	112	22	Average
3	* 973.837	4.41	31.86	36.28	-17.72	54.00	112	22	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_922.3MHz	Test Voltage	By Battery

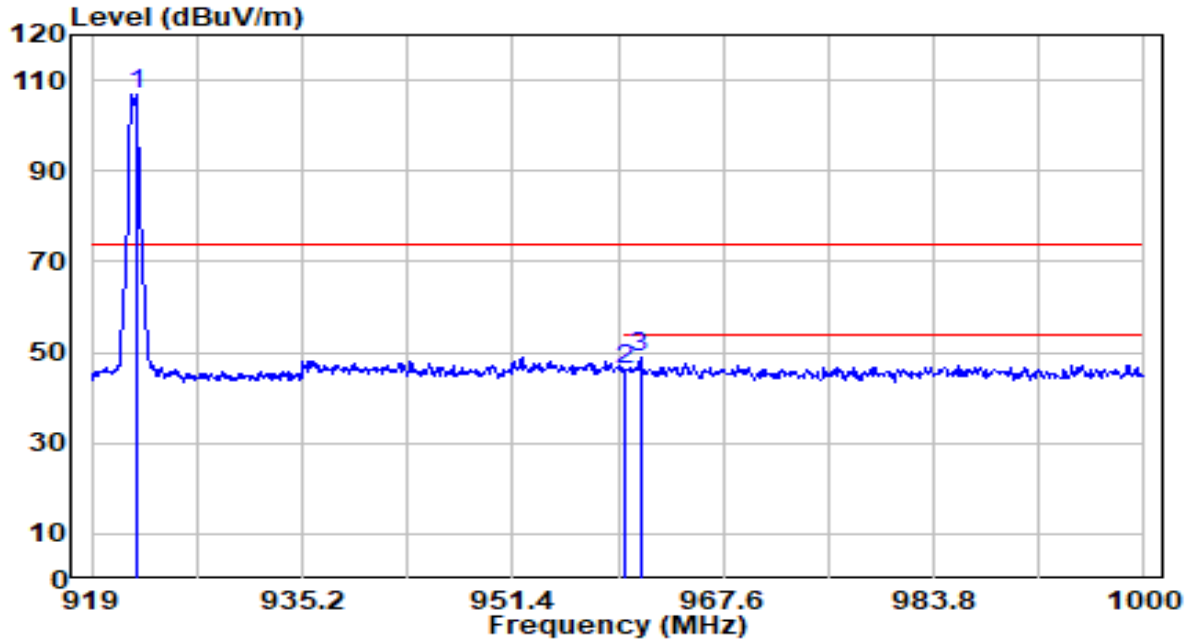


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	922.483	75.11	31.64	106.75	N/A	N/A	196	80	Peak
2	960.000	14.65	31.73	46.38	-27.62	74.00	196	80	Peak
3	* 961.201	16.94	31.74	48.68	-25.32	74.00	196	80	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_922.3MHz	Test Voltage	By Battery

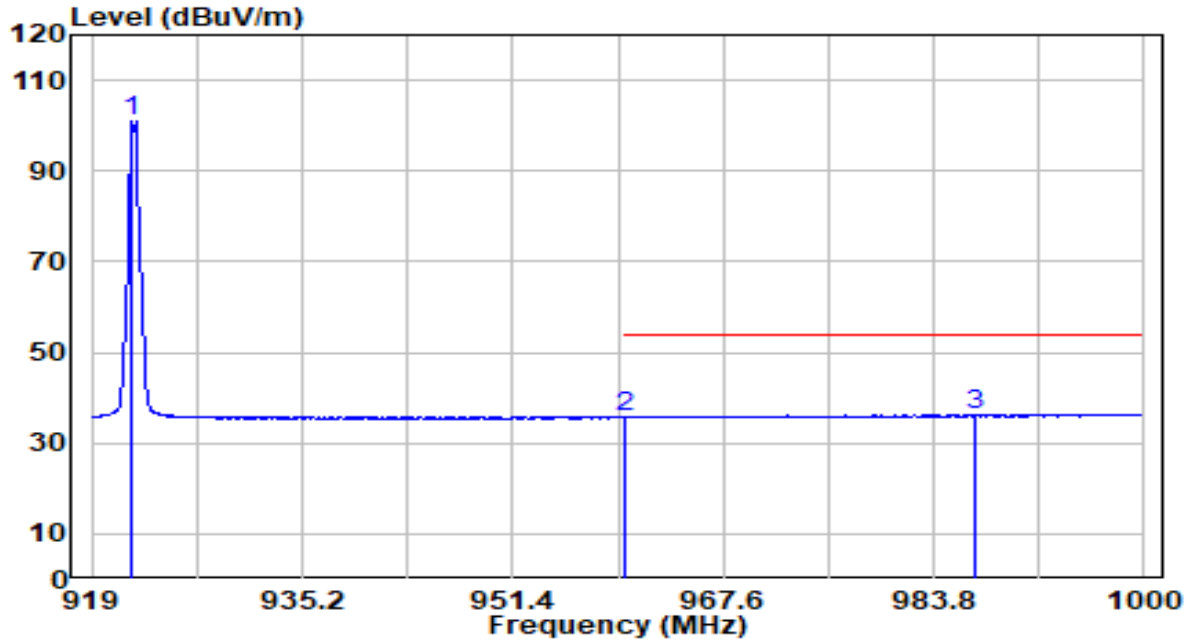


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	922.078	69.35	31.64	100.98	N/A	N/A	196	80	Average
2	960.000	3.87	31.73	35.59	-18.41	54.00	196	80	Average
3	* 987.040	4.16	31.99	36.15	-17.85	54.00	196	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_922.3MHz	Test Voltage	By Battery

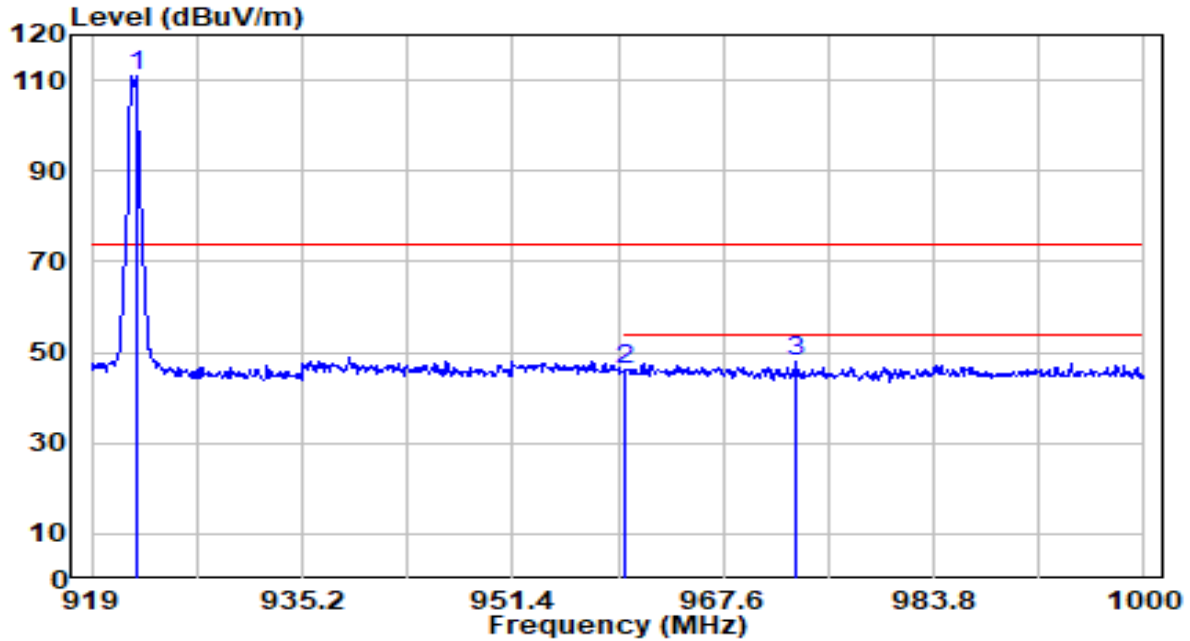


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	922.483	79.20	31.64	110.84	N/A	N/A	107	25	Peak
2	960.000	14.25	31.73	45.98	-28.02	74.00	107	25	Peak
3	* 973.108	16.06	31.86	47.92	-26.08	74.00	107	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	SUB 1G_TX_922.3MHz	Test Voltage	By Battery

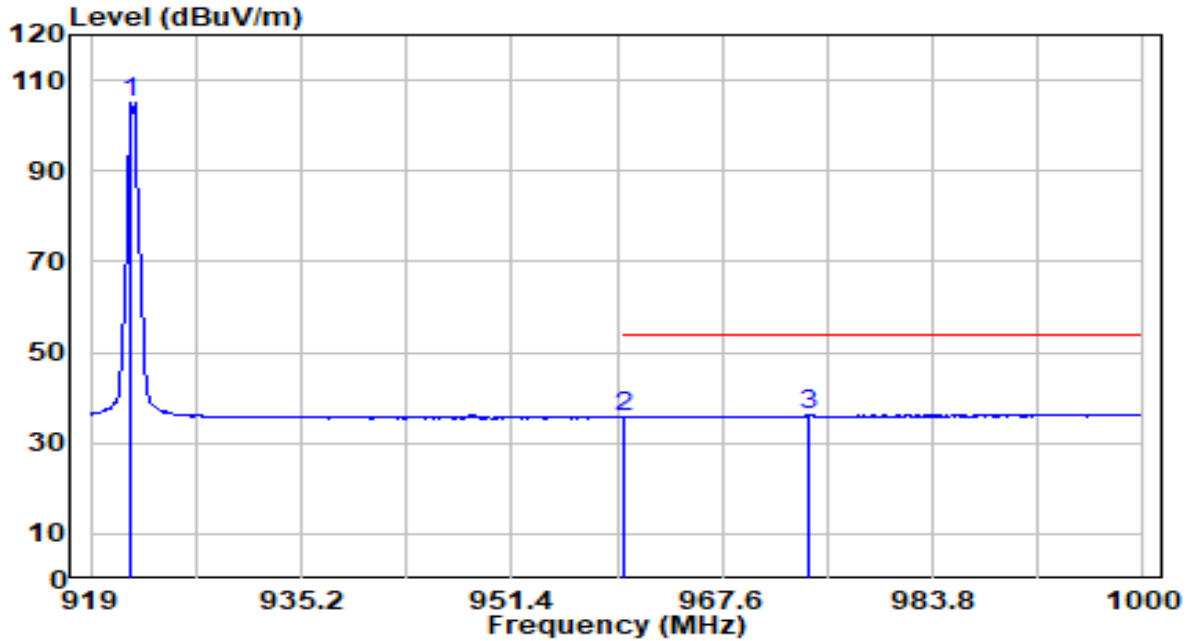

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	922.078	73.45	31.64	105.08	N/A	N/A	107	25	Average
2	960.000	4.00	31.73	35.73	-18.27	54.00	107	25	Average
3	* 974.323	4.37	31.87	36.24	-17.76	54.00	107	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

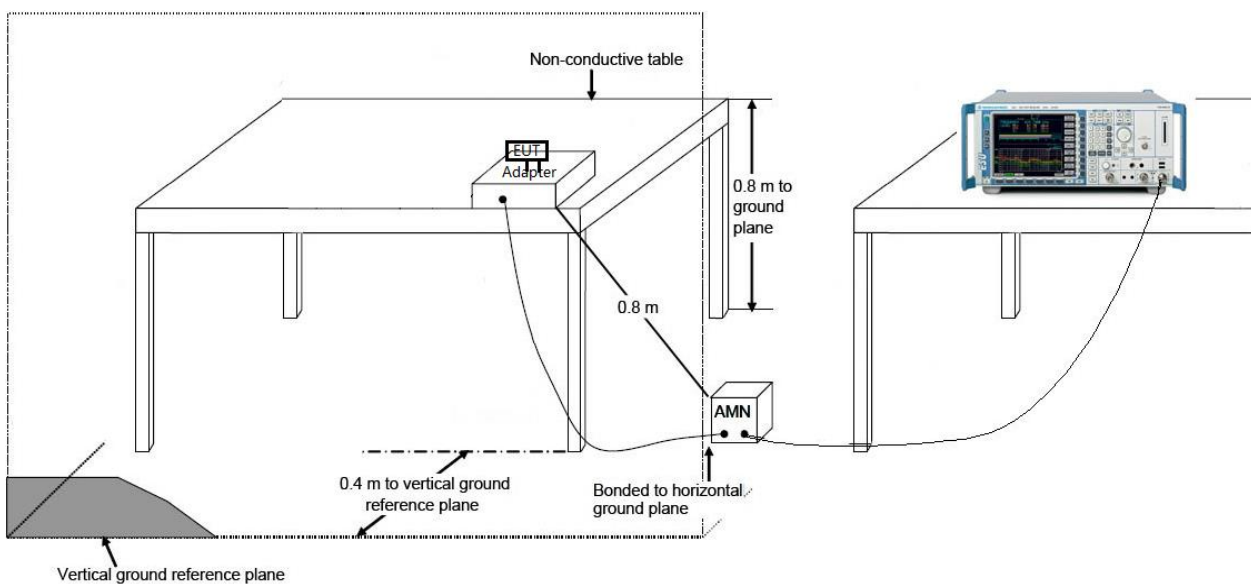

7.8.3. Test Result

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-16
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.6°C /65%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	AC 120V/60Hz

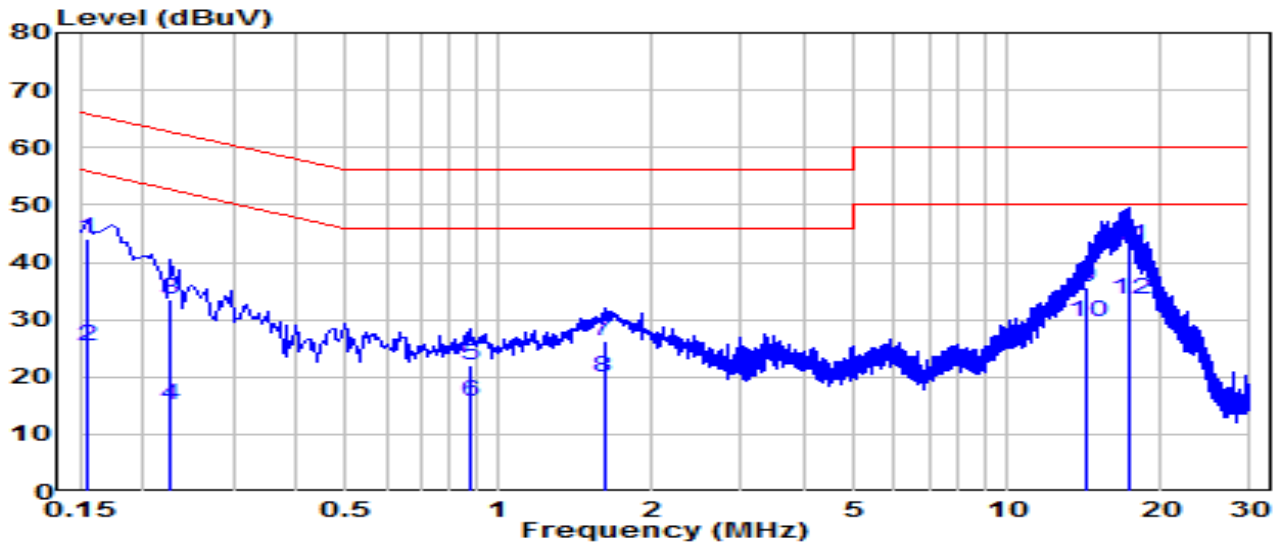


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.154	34.54	9.62	44.16	-21.60	65.75	QP
2	0.154	15.71	9.62	25.33	-30.43	55.75	Average
3	0.226	23.89	9.62	33.52	-29.06	62.58	QP
4	0.226	5.36	9.62	14.98	-37.60	52.58	Average
5	0.874	12.45	9.66	22.12	-33.88	56.00	QP
6	0.874	6.14	9.66	15.80	-30.20	46.00	Average
7	1.608	16.48	9.68	26.17	-29.83	56.00	QP
8	1.608	10.26	9.68	19.94	-26.06	46.00	Average
9	14.391	25.66	9.89	35.55	-24.45	60.00	QP
10	14.391	19.65	9.89	29.54	-20.46	50.00	Average
11	* 17.298	32.90	9.91	42.81	-17.19	60.00	QP
12	* 17.298	23.46	9.91	33.36	-16.64	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-16
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.6°C /65%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	AC 120V/60Hz

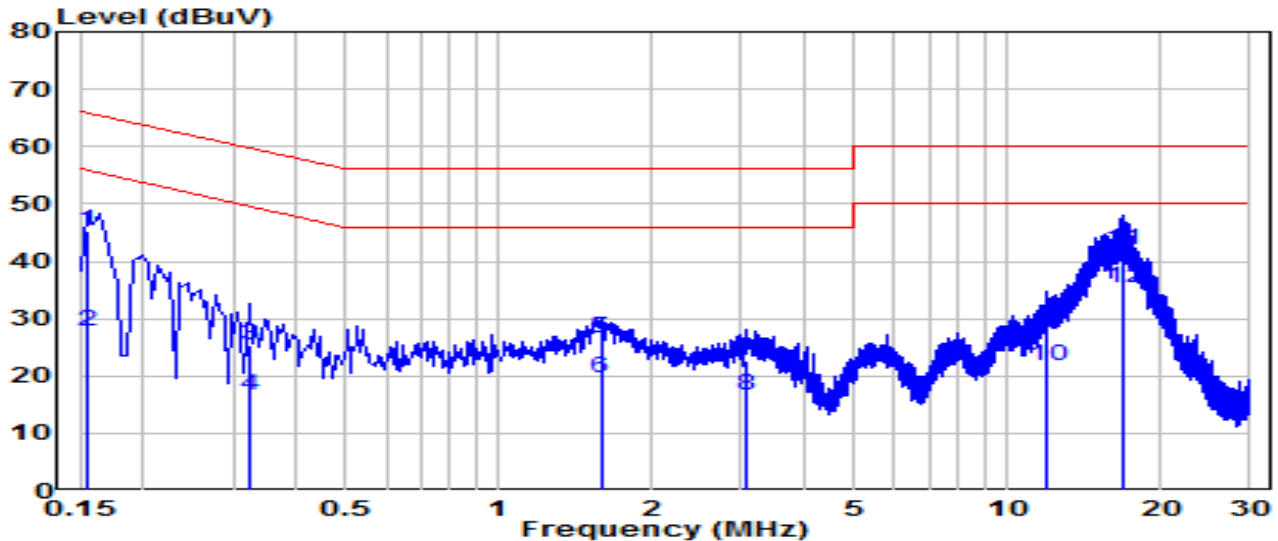


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	35.80	9.62	45.42	-20.33	65.75	QP
2	0.154	18.30	9.62	27.92	-27.84	55.75	Average
3	0.325	15.84	9.63	25.47	-34.09	59.57	QP
4	0.325	7.00	9.63	16.63	-32.93	49.57	Average
5	1.585	16.76	9.68	26.44	-29.56	56.00	QP
6	1.585	9.85	9.68	19.53	-26.47	46.00	Average
7	3.084	12.86	9.71	22.57	-33.43	56.00	QP
8	3.084	6.77	9.71	16.48	-29.52	46.00	Average
9	11.894	17.55	9.89	27.45	-32.55	60.00	QP
10	11.894	11.84	9.89	21.73	-28.27	50.00	Average
11	* 16.897	31.98	9.96	41.94	-18.06	60.00	QP
12	* 16.897	25.46	9.96	35.42	-14.58	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-16
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.6°C /65%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	AC 240V/60Hz

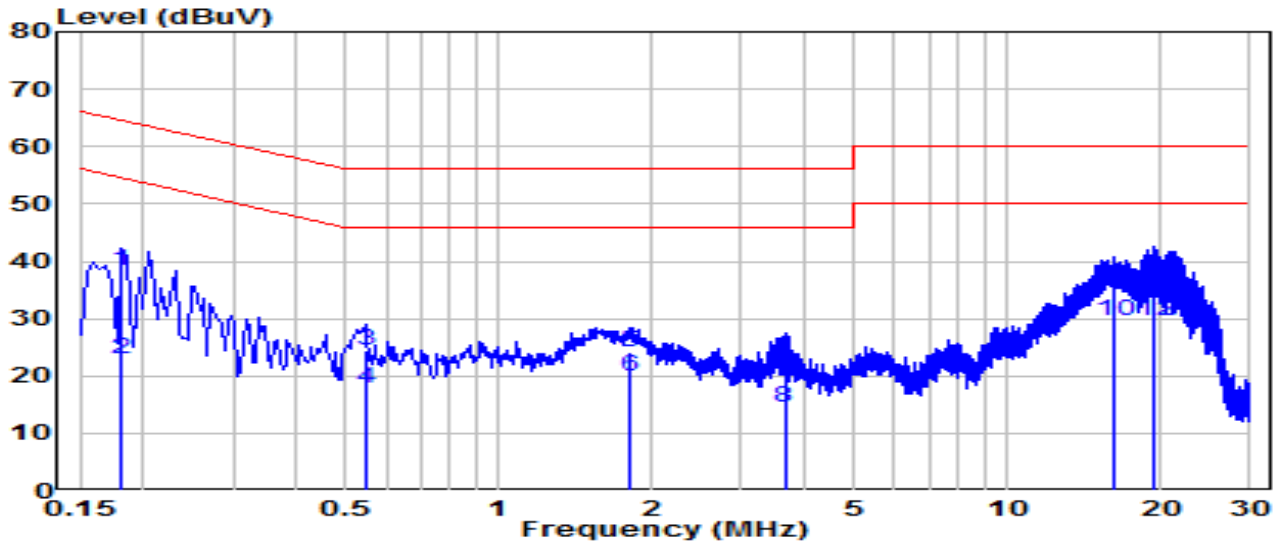


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.181	28.80	9.62	38.42	-25.99	64.42	QP
2	0.181	13.33	9.62	22.95	-31.47	54.42	Average
3	0.546	14.89	9.64	24.53	-31.47	56.00	QP
4	0.546	8.08	9.64	17.73	-28.27	46.00	Average
5	1.801	14.57	9.69	24.26	-31.74	56.00	QP
6	1.801	10.11	9.69	19.80	-26.20	46.00	Average
7	3.646	11.00	9.72	20.73	-35.27	56.00	QP
8	3.646	4.89	9.72	14.61	-31.39	46.00	Average
9	*	16.290	9.90	35.07	-24.93	60.00	QP
10	*	16.290	9.90	29.66	-20.34	50.00	Average
11	19.516	26.79	9.93	36.72	-23.28	60.00	QP
12	19.516	19.61	9.93	29.54	-20.46	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Tapo Video Doorbell Camera	Date of Test	2022-12-16
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.6°C /65%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	SUB 1G_TX_921.7MHz	Test Voltage	AC 240V/60Hz

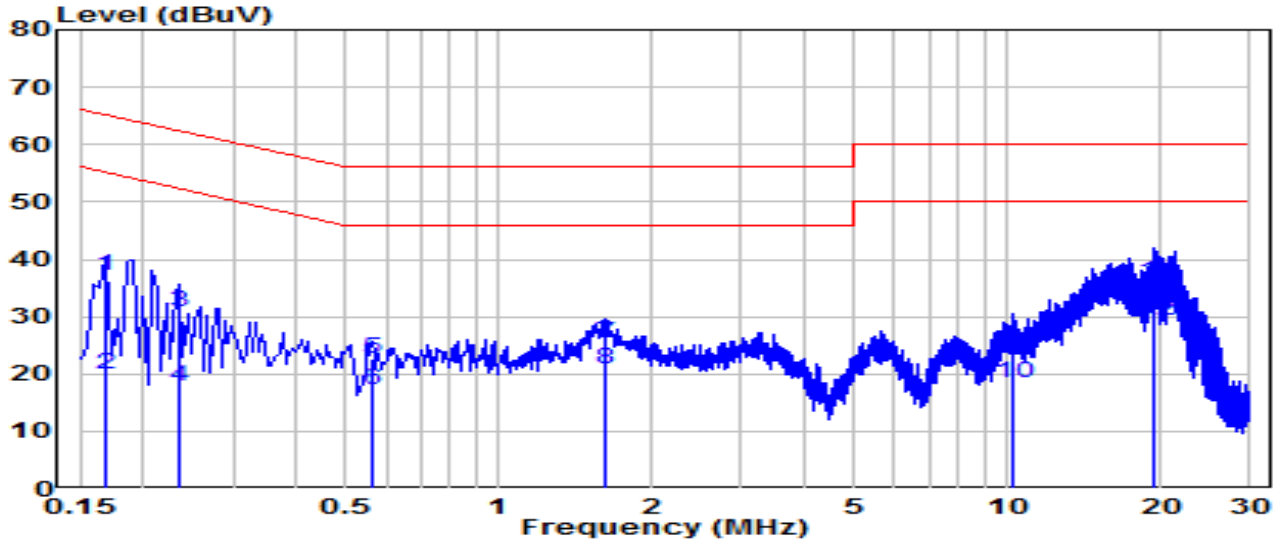

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	27.53	9.62	37.15	-27.91	65.06	QP
2	0.168	10.32	9.62	19.94	-35.12	55.06	Average
3	0.235	21.11	9.62	30.74	-31.52	62.25	QP
4	0.235	8.24	9.62	17.86	-34.39	52.25	Average
5	0.564	12.95	9.65	22.59	-33.41	56.00	QP
6	0.564	7.53	9.65	17.17	-28.83	46.00	Average
7	1.617	15.66	9.68	25.34	-30.66	56.00	QP
8	1.617	11.12	9.68	20.80	-25.20	46.00	Average
9	10.202	14.05	9.87	23.93	-36.07	60.00	QP
10	10.202	8.55	9.87	18.42	-31.58	50.00	Average
11	* 19.458	25.93	9.99	35.93	-24.07	60.00	QP
12	* 19.458	19.40	9.99	29.39	-20.61	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC Rules.

————— The End —————

Appendix A : Test Photograph

Refer to “2212TW0107-Setup Photo” file.

Appendix B : External Photograph

Refer to “2212TW0107-External Photo” file.

Appendix C : Internal Photograph

Refer to “2212TW0107-Internal Photo” file.