








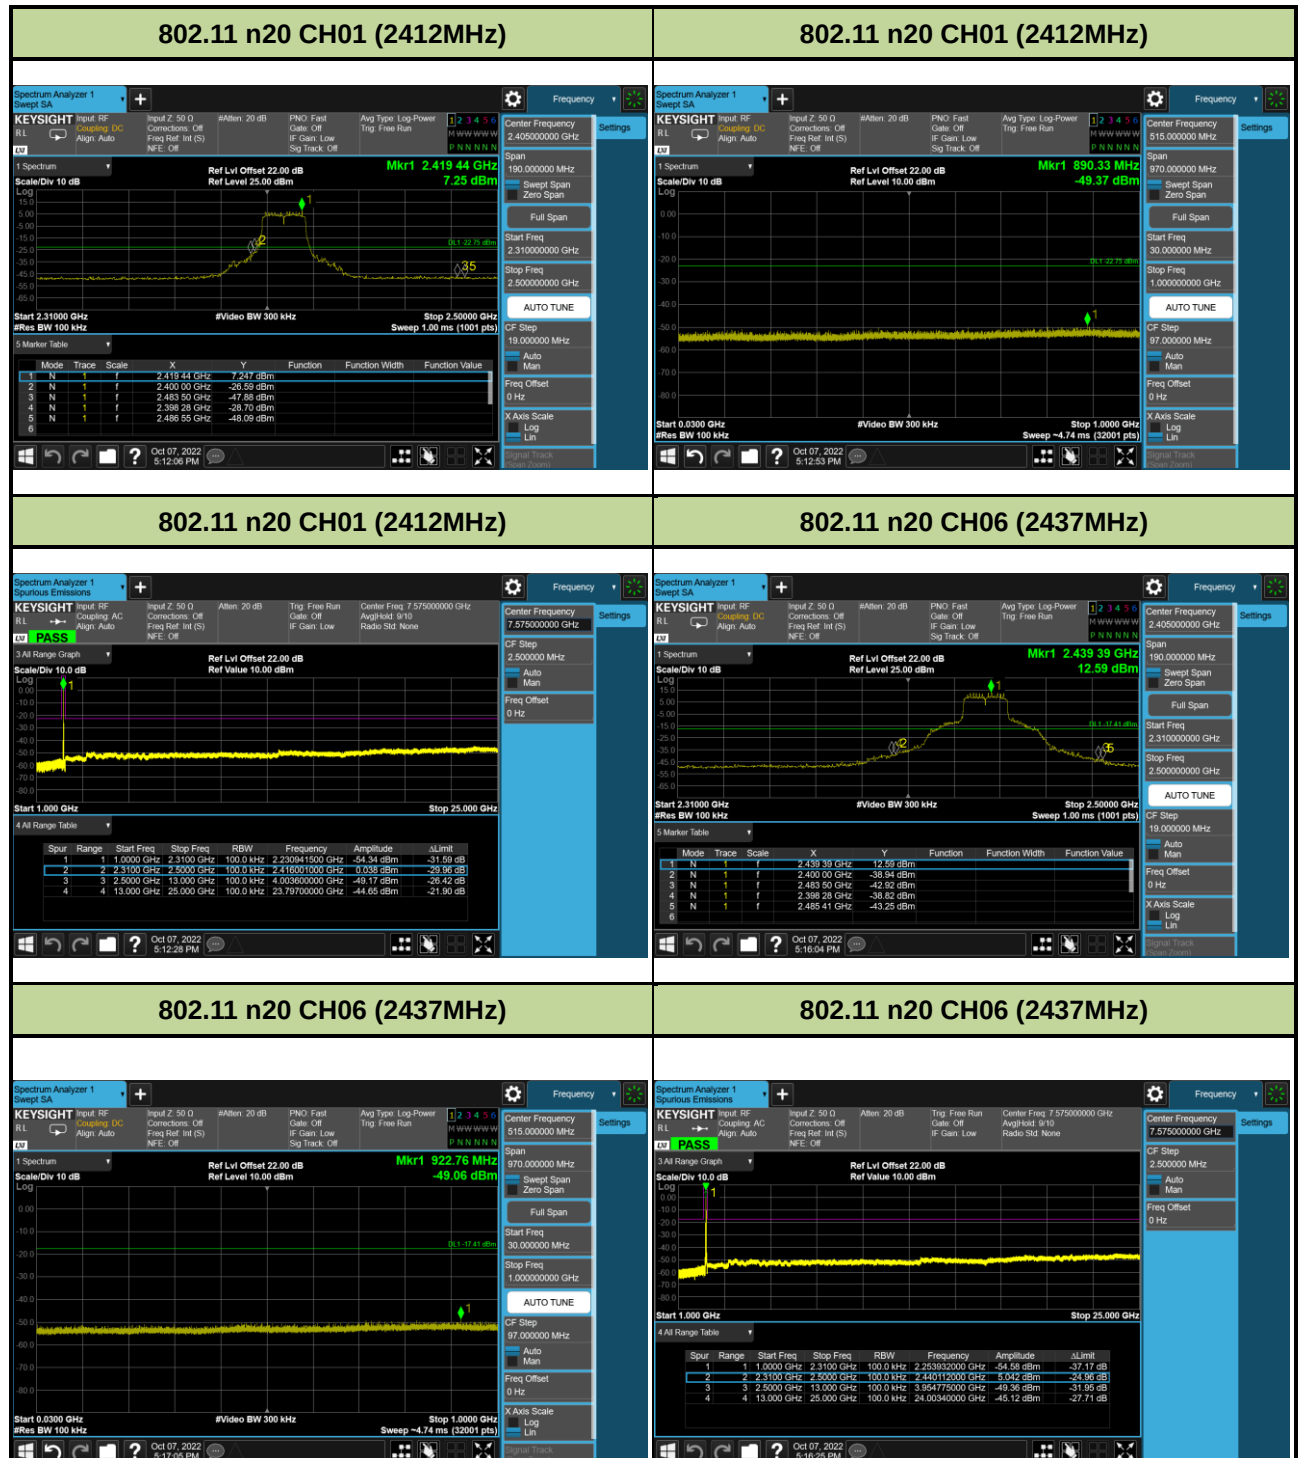

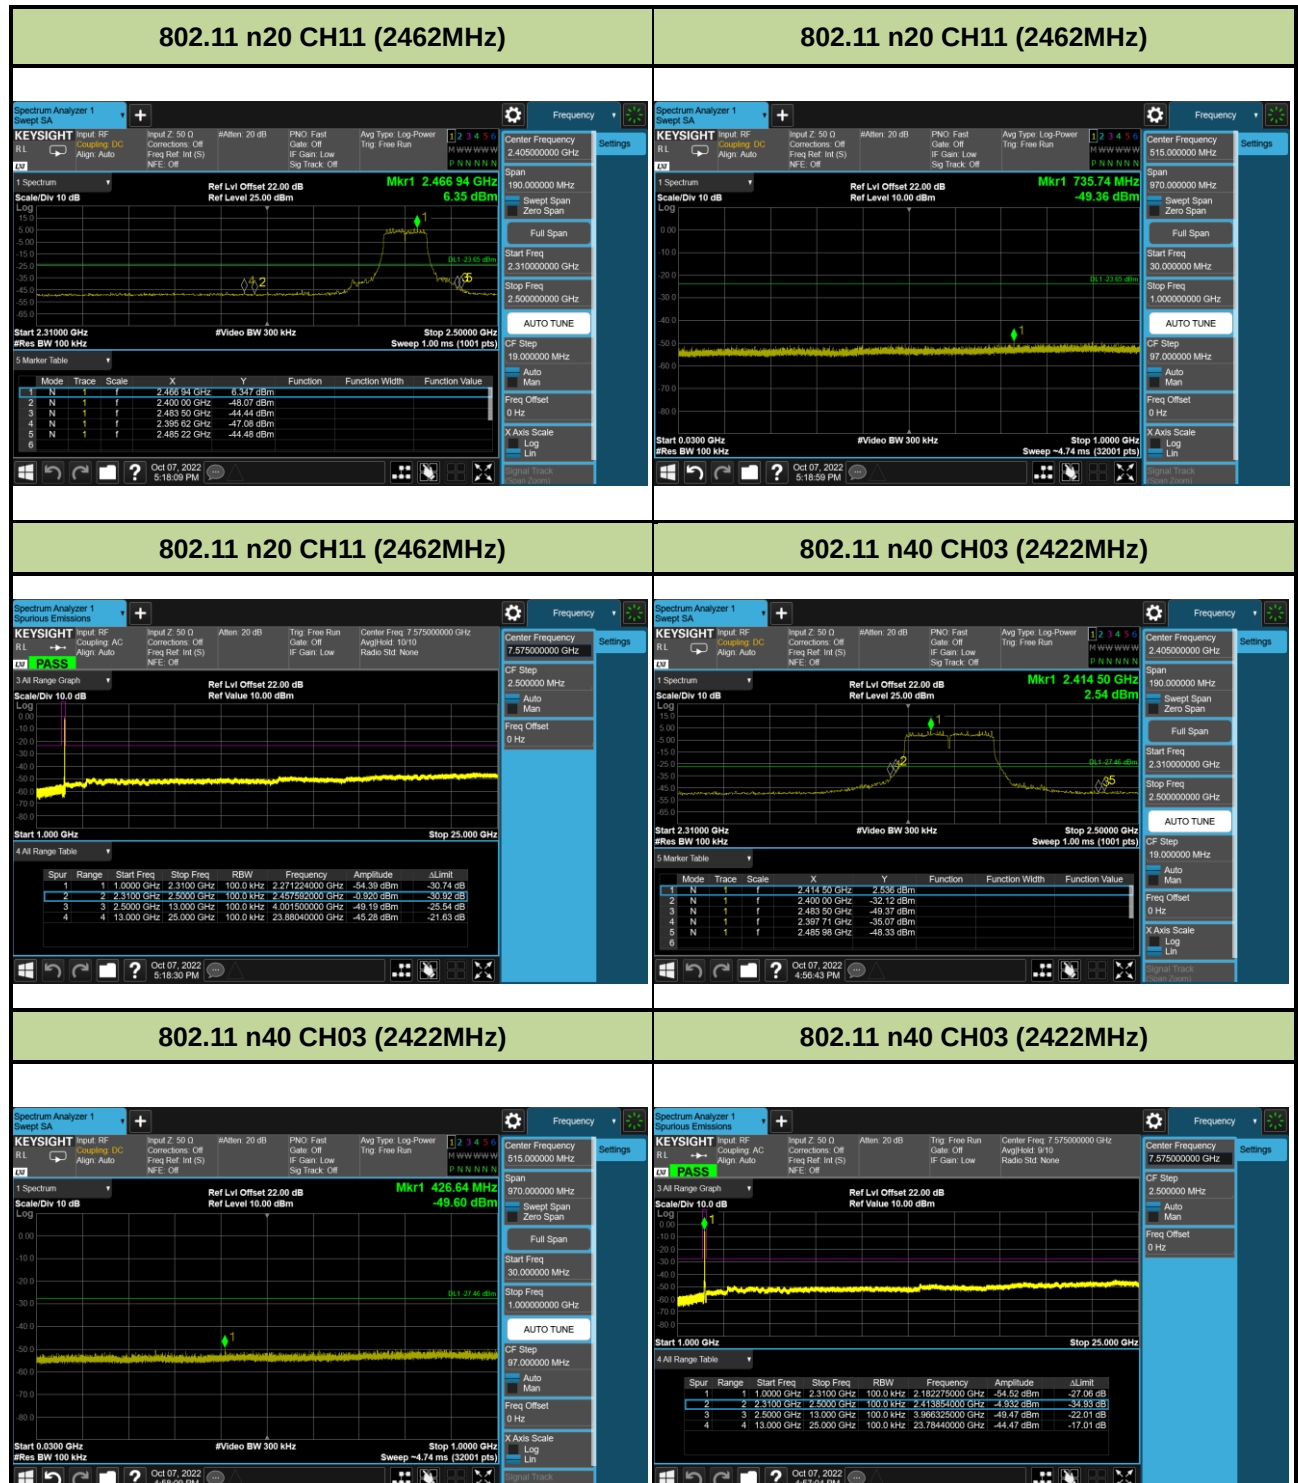

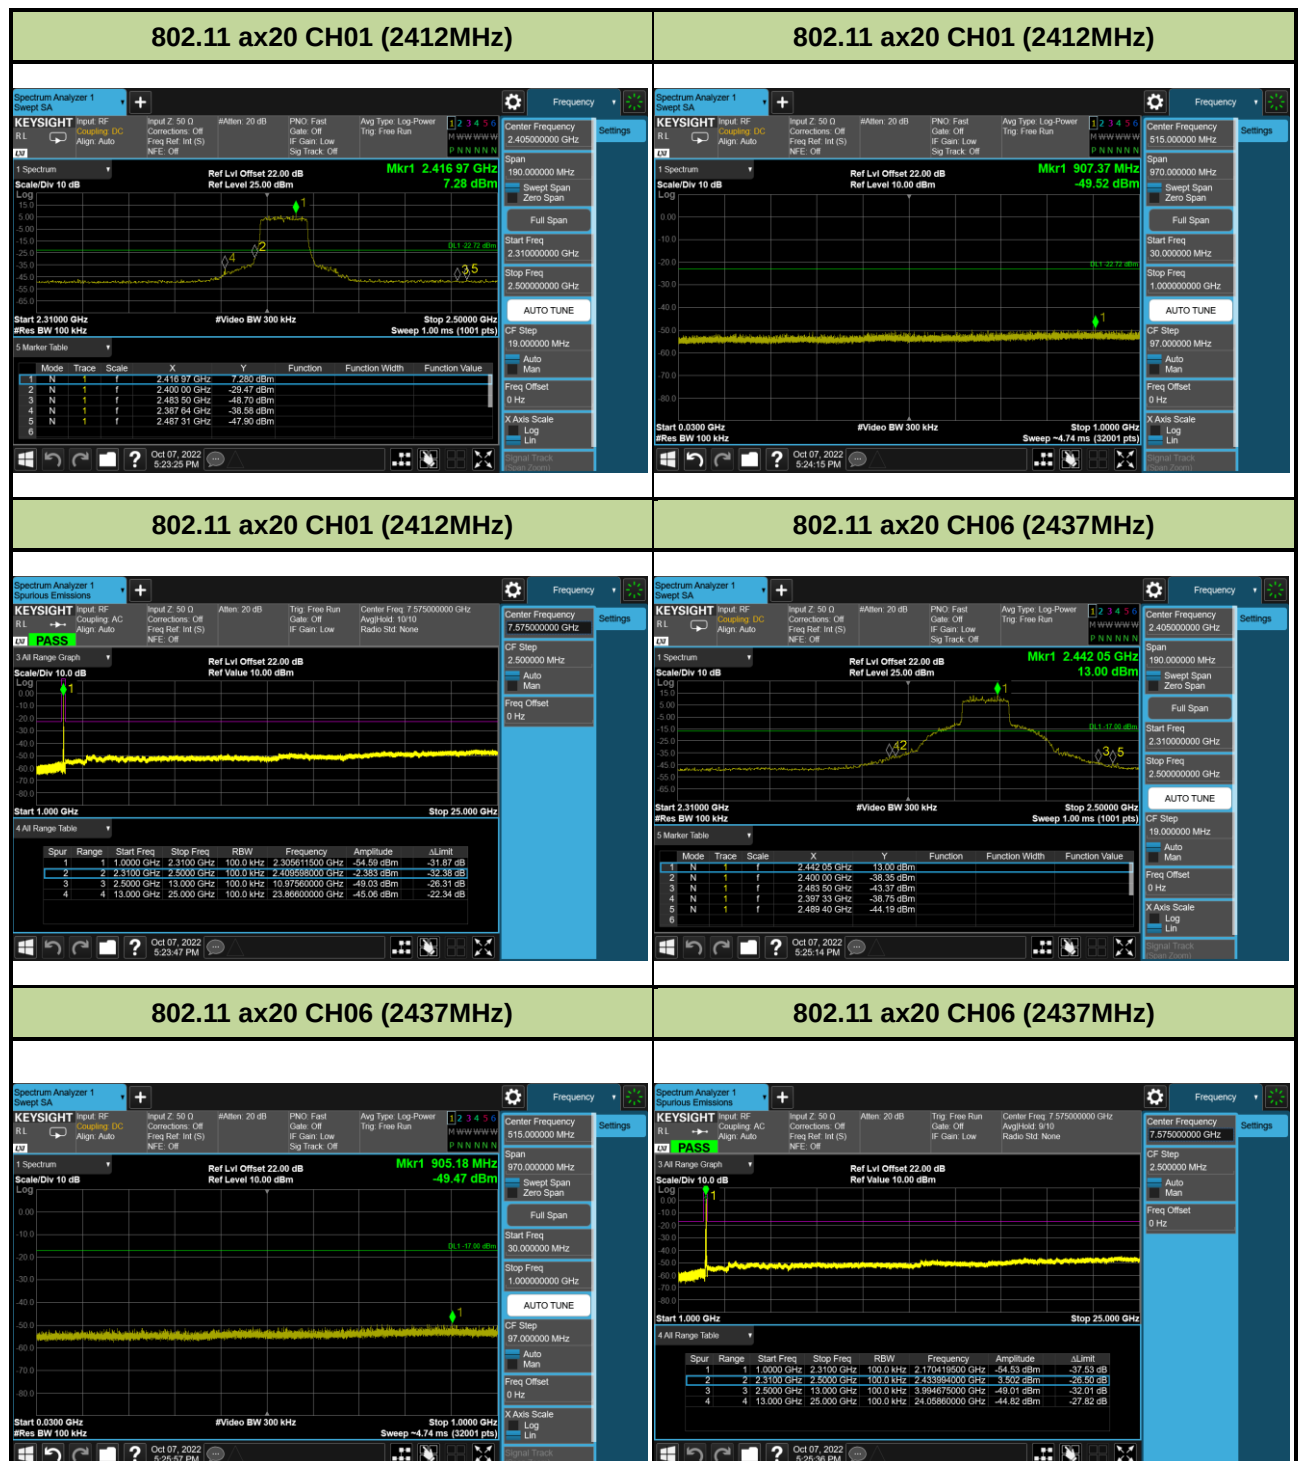

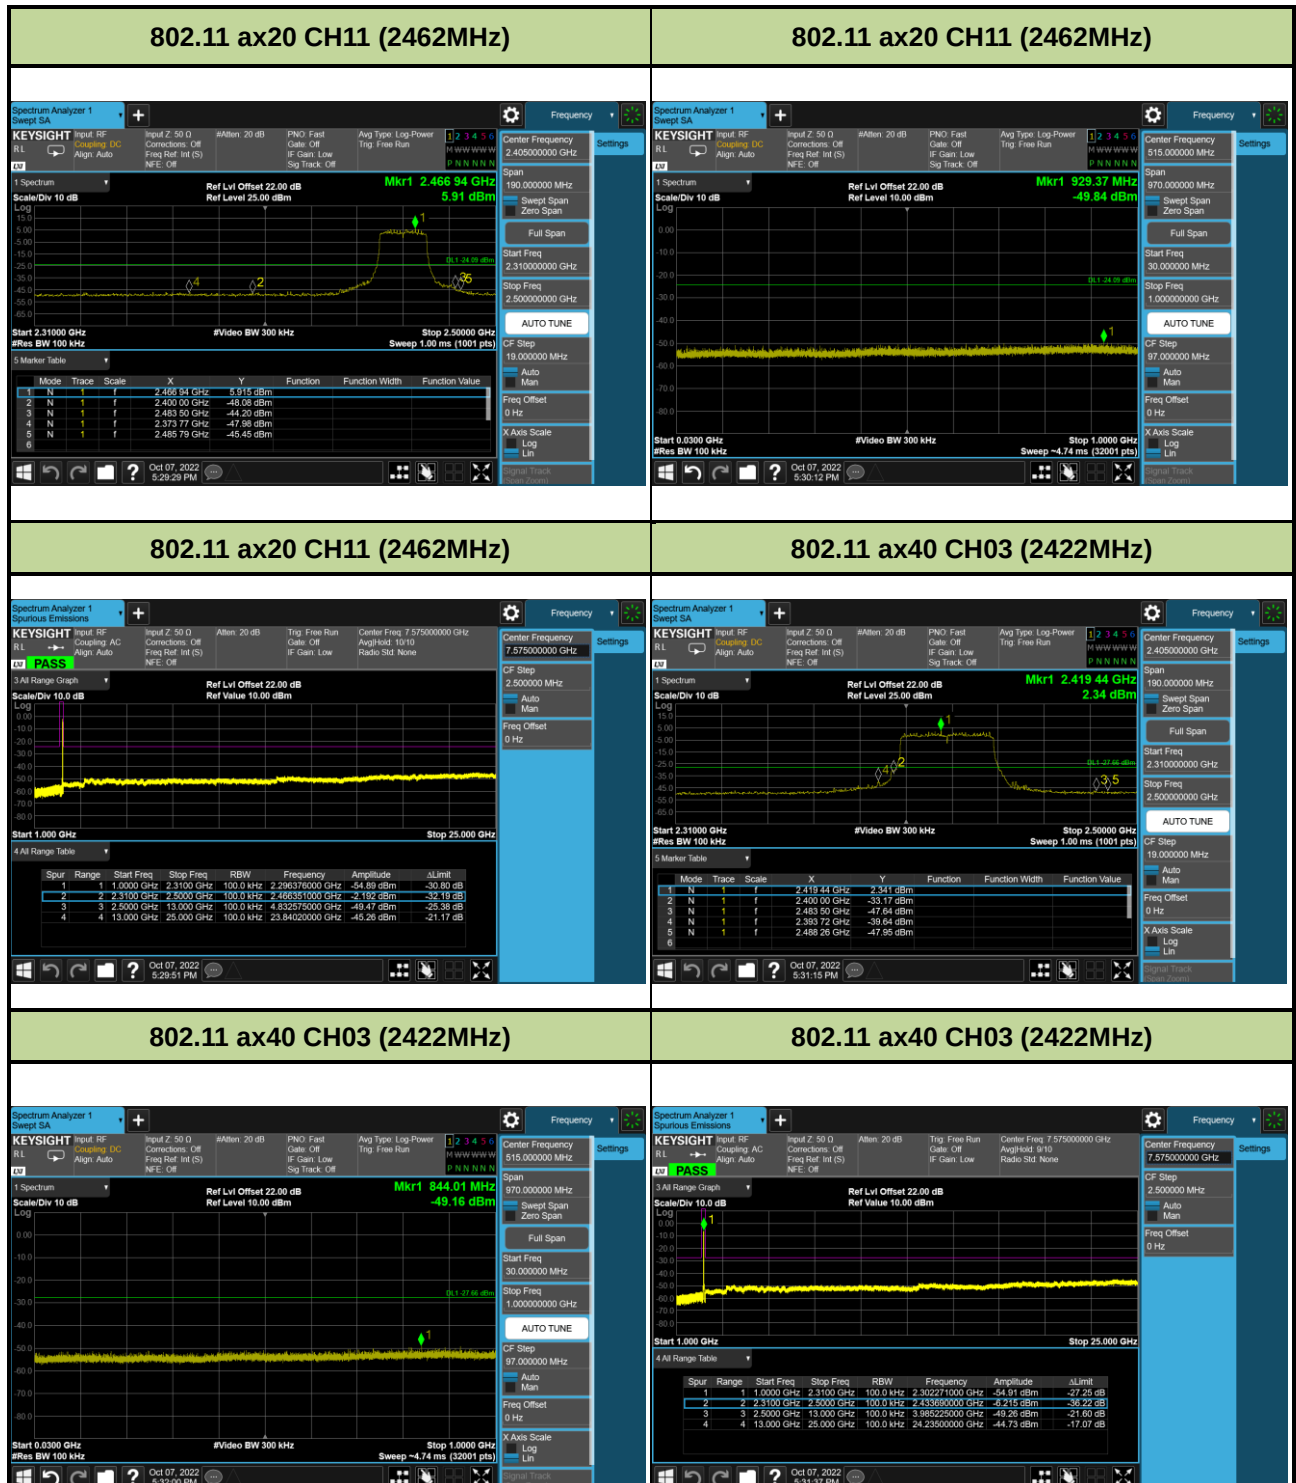

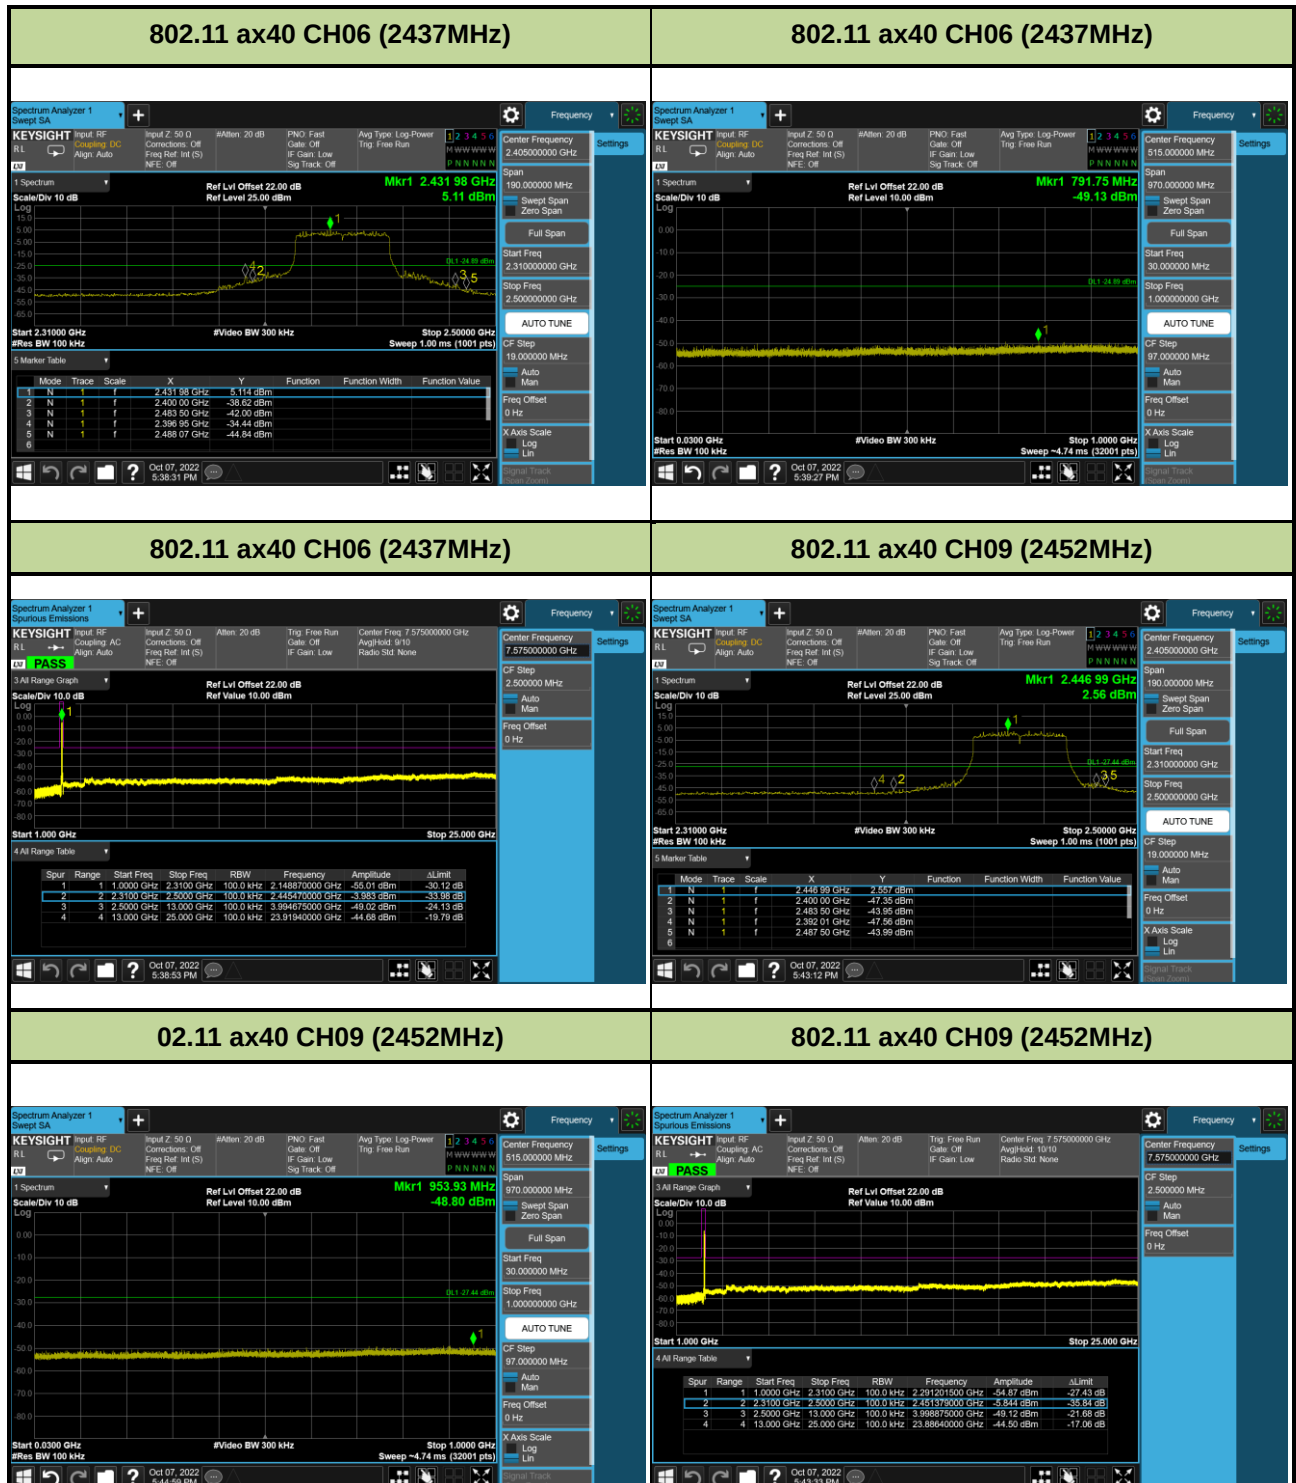

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

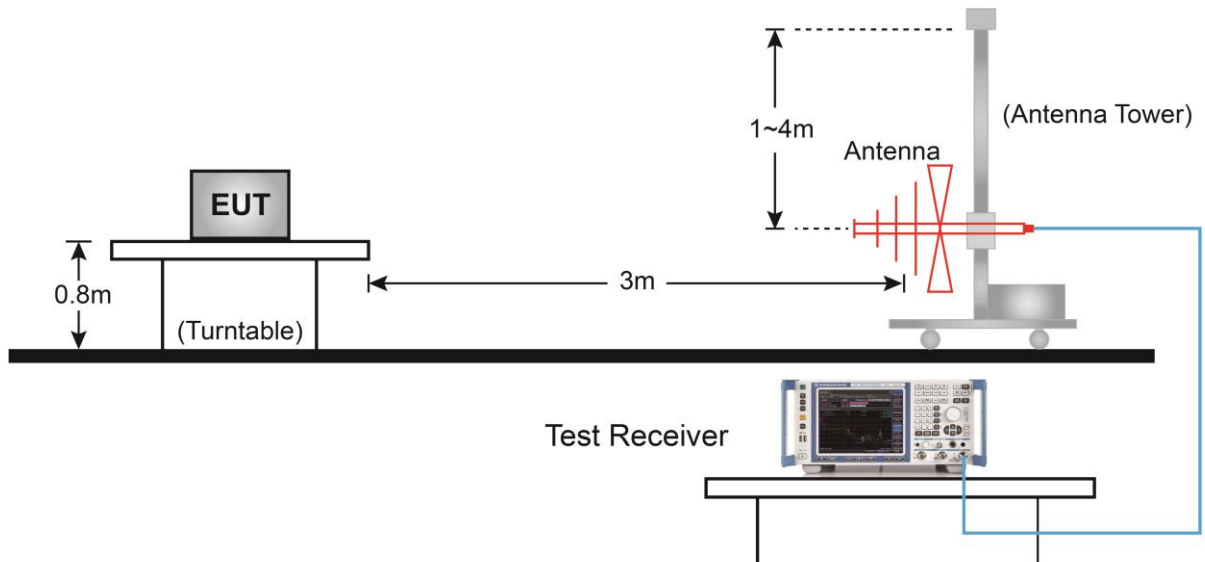


Above 1GHz Test Setup:

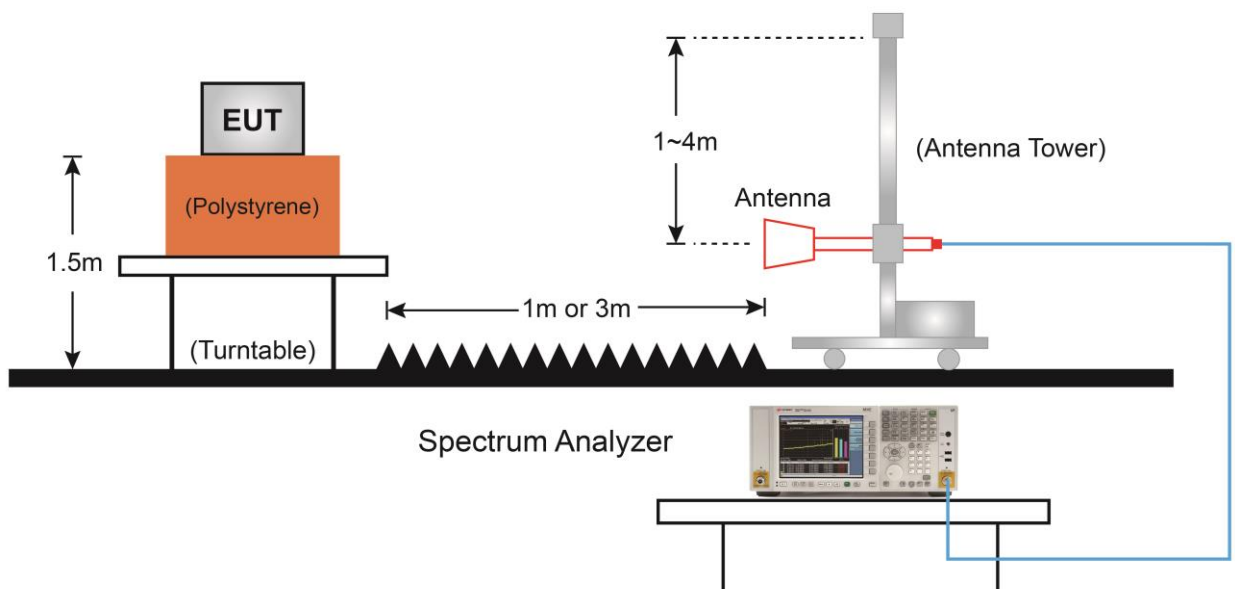

7.6.5. Test Result

Horizontal Antenna Data

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

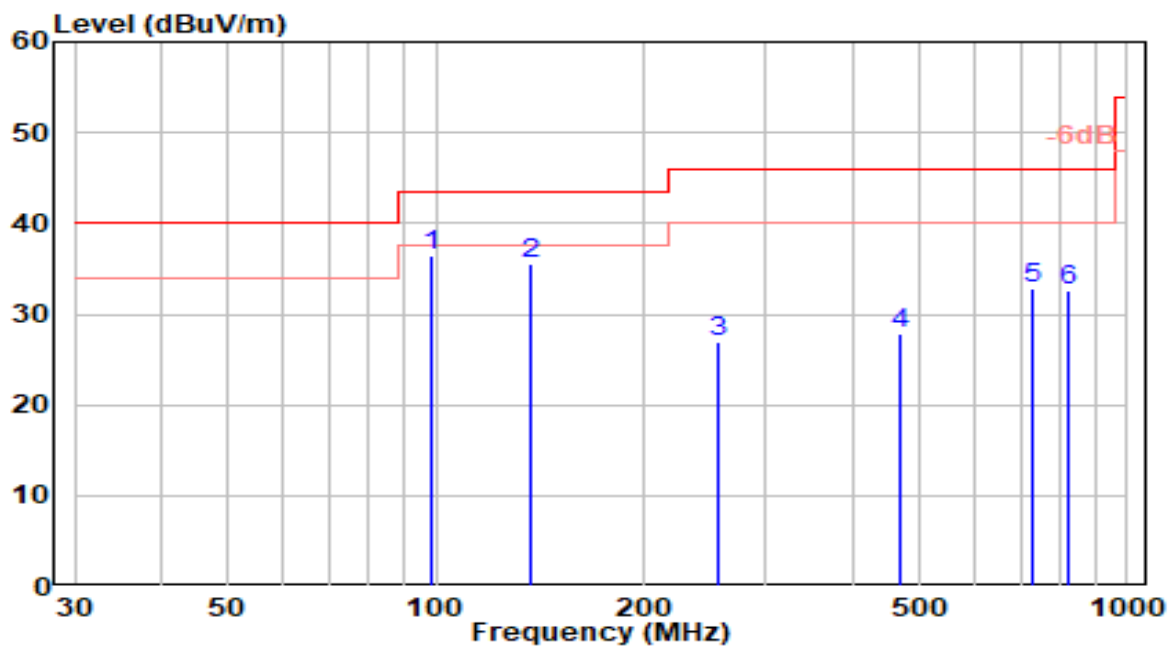


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	98.370	17.35	19.04	36.39	-7.11	43.50	200	145	QP
2		137.510	19.91	15.71	35.62	-7.88	43.50	200	310	QP
3		256.270	6.26	20.78	27.04	-18.96	46.00	200	270	QP
4		467.430	2.91	24.88	27.79	-18.21	46.00	100	50	QP
5		729.120	3.42	29.32	32.74	-13.26	46.00	200	240	QP
6		824.660	2.14	30.40	32.53	-13.47	46.00	200	225	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

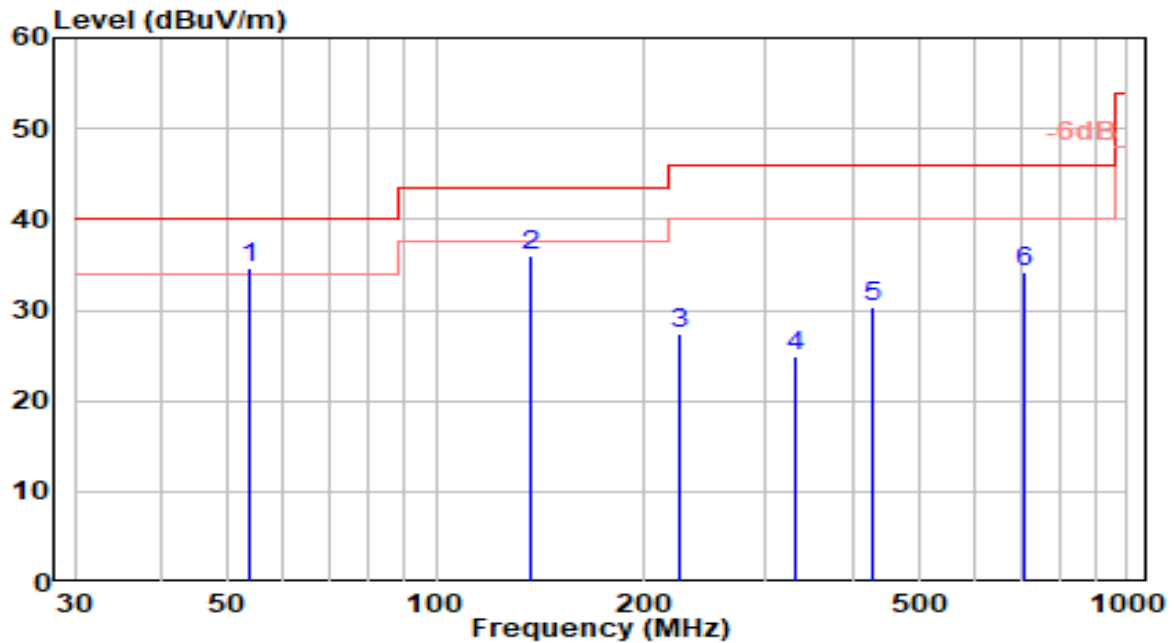


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.750	13.52	21.02	34.54	-5.46	40.00	100	265	QP
2		137.510	20.34	15.71	36.05	-7.45	43.50	100	95	QP
3		224.260	7.97	19.37	27.34	-18.66	46.00	100	45	QP
4		331.630	2.55	22.37	24.91	-21.09	46.00	200	45	QP
5		427.450	6.07	24.25	30.32	-15.68	46.00	100	95	QP
6		711.170	5.07	29.07	34.15	-11.85	46.00	200	170	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

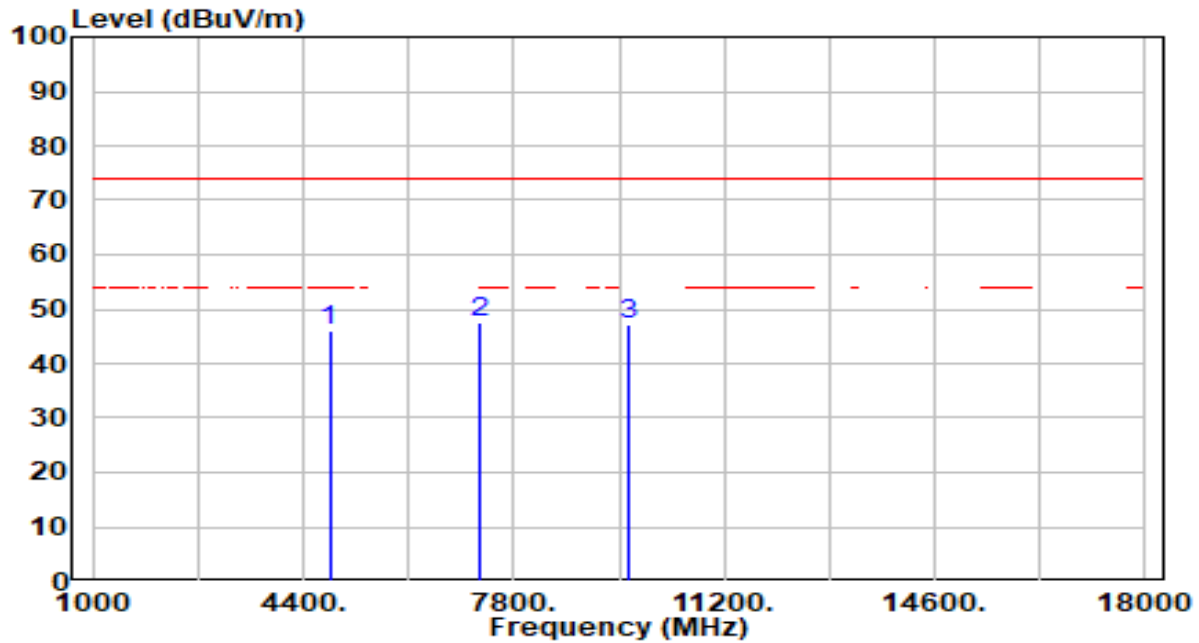


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	45.78	0.25	46.03	-27.97	74.00	300	35	Peak
2	*	7236.000	41.55	5.81	47.36	-26.64	74.00	200	150	Peak
3		9648.000	41.97	5.32	47.29	-26.71	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

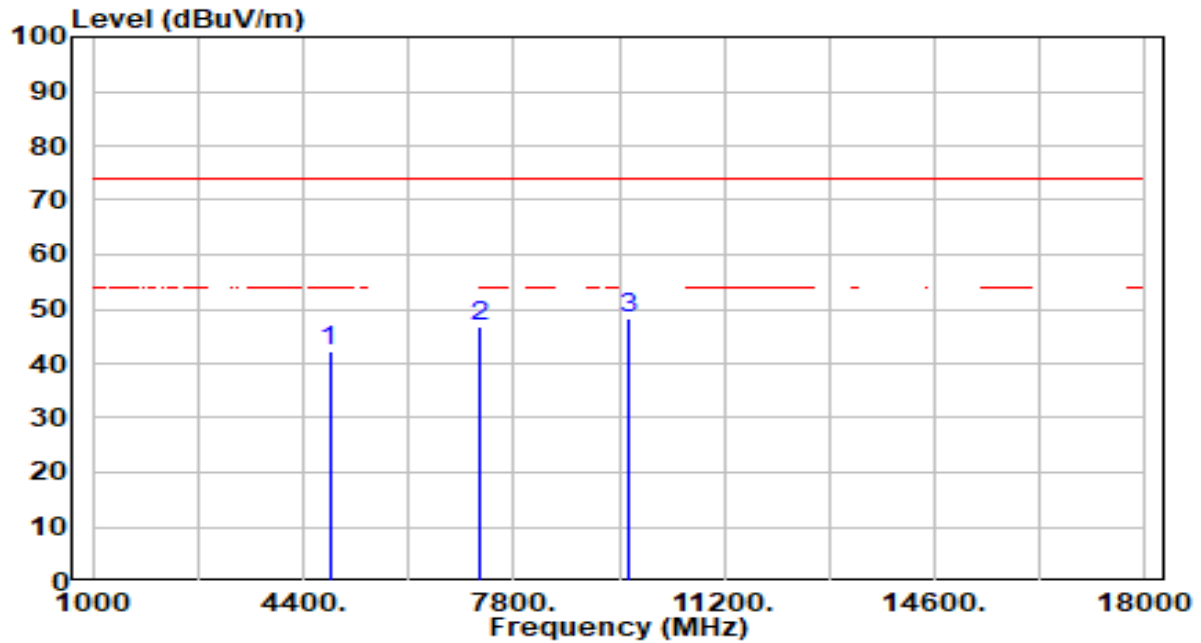


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.01	0.25	42.26	-31.74	74.00	300	35	Peak
2	7236.000	41.16	5.81	46.97	-27.03	74.00	265	0	Peak
3	* 9648.000	43.00	5.32	48.32	-25.68	74.00	300	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

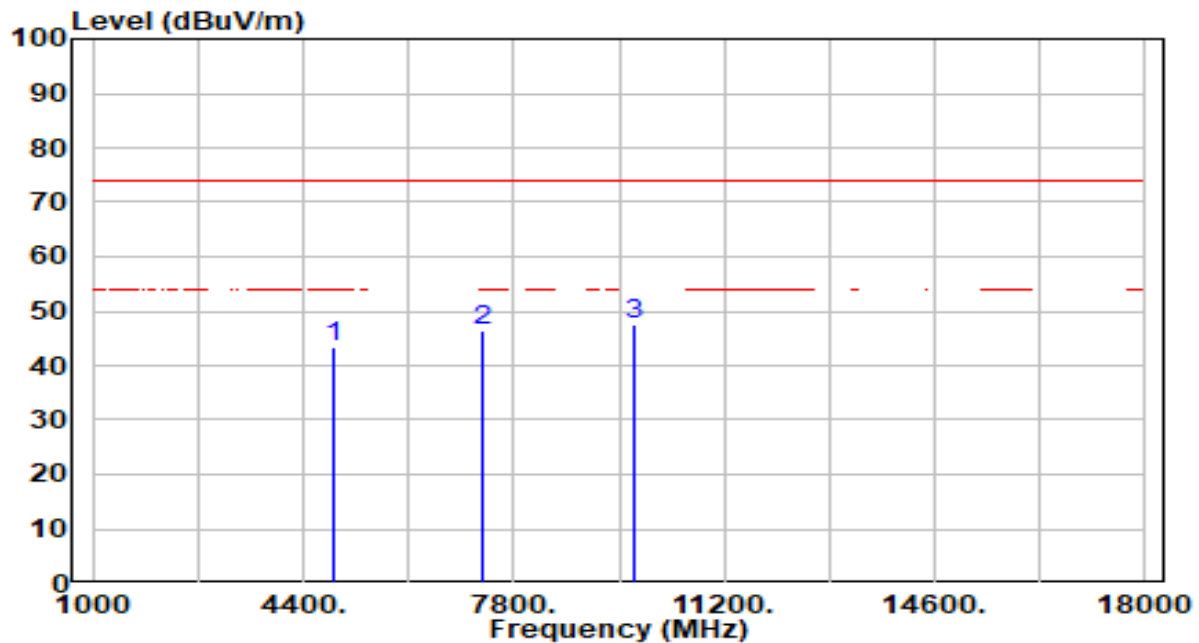


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.09	0.35	43.44	-30.56	74.00	100	270	Peak
2	7311.000	40.79	5.79	46.58	-27.42	74.00	100	35	Peak
3	* 9748.000	42.20	5.34	47.54	-26.46	74.00	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

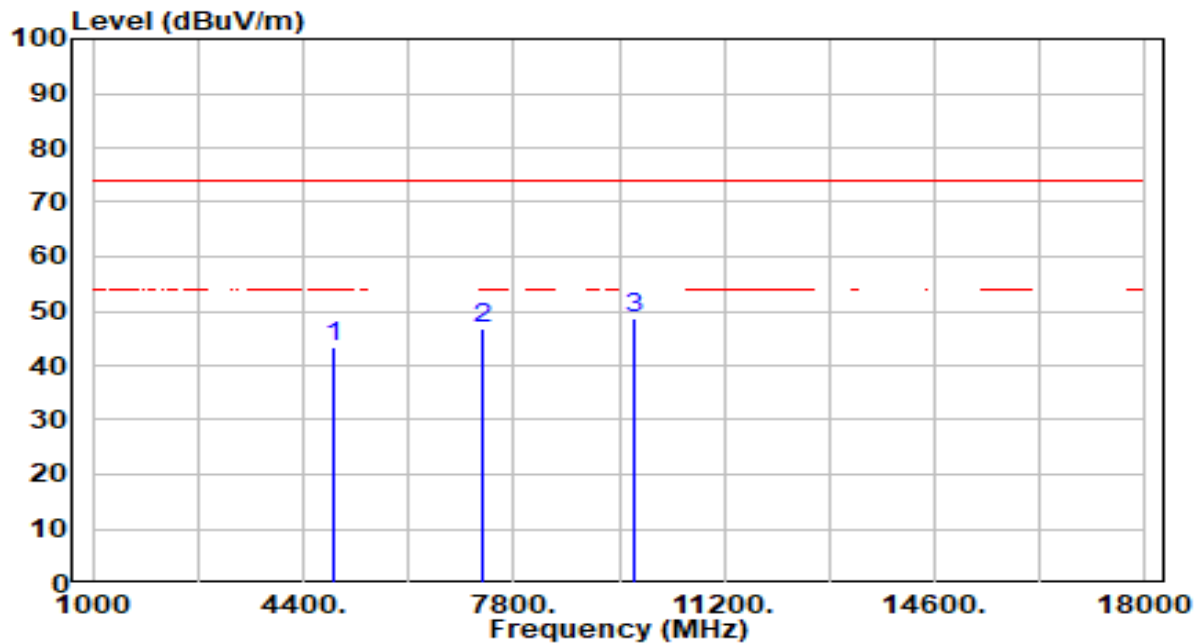


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.89	0.35	43.24	-30.76	74.00	100	25	Peak
2	7311.000	41.07	5.79	46.86	-27.14	74.00	100	85	Peak
3	* 9748.000	43.26	5.34	48.60	-25.40	74.00	100	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

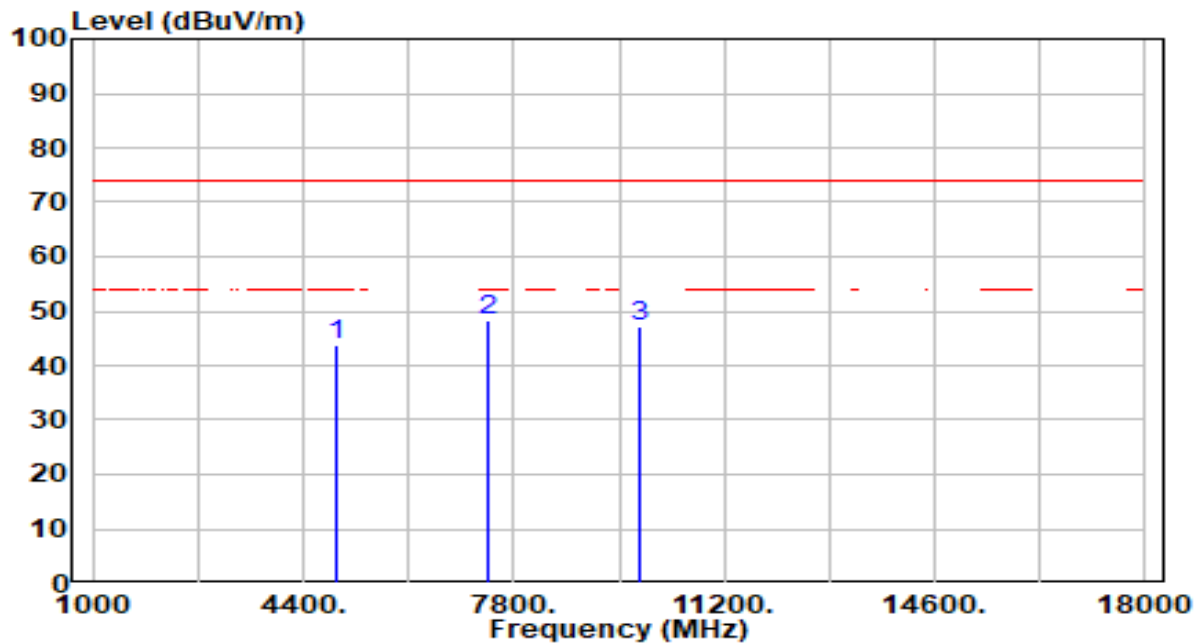


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	43.40	0.45	43.85	-30.15	74.00	100	285	Peak
2	*	7386.000	42.45	5.77	48.23	-25.77	74.00	100	265	Peak
3		9848.000	41.83	5.38	47.21	-26.79	74.00	100	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

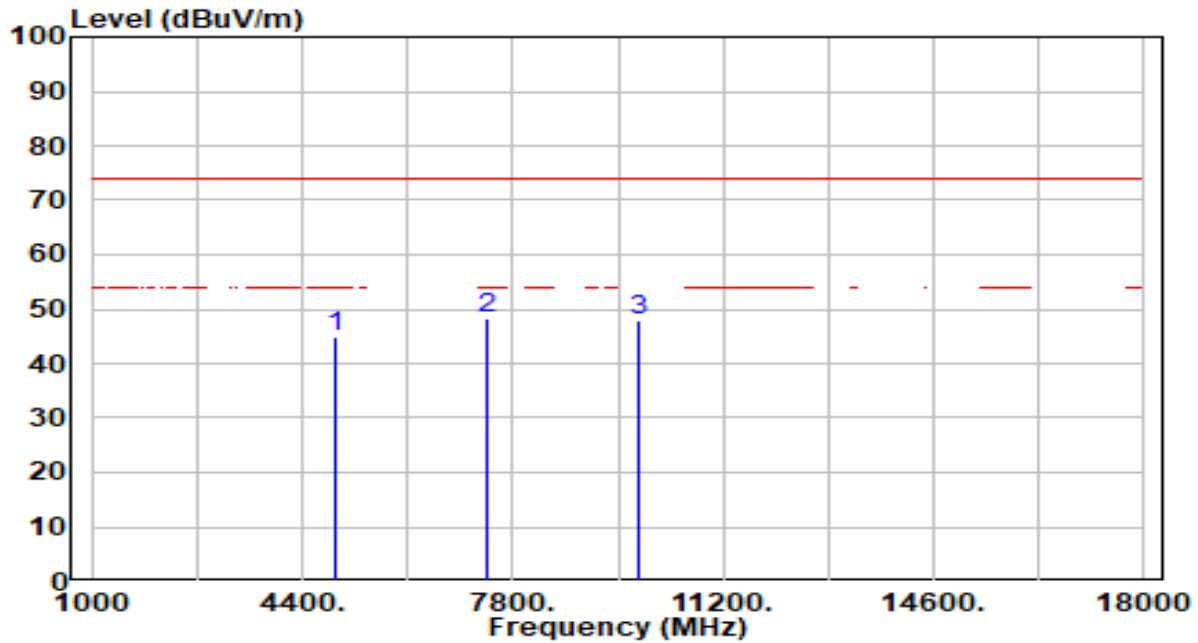


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	44.43	0.45	44.89	-29.11	74.00	100	40	Peak
2	*	7386.000	42.37	5.77	48.14	-25.86	74.00	100	360	Peak
3		9848.000	42.45	5.38	47.83	-26.17	74.00	100	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

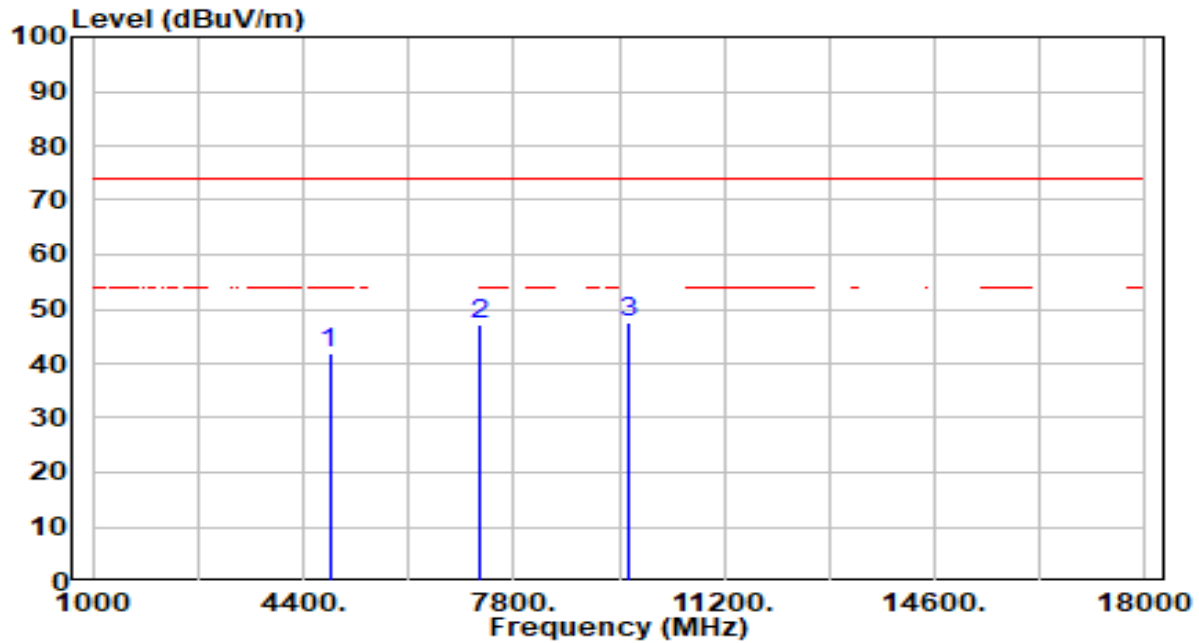


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.52	0.25	41.77	-32.23	74.00	100	205	Peak
2	7236.000	41.37	5.81	47.19	-26.81	74.00	100	285	Peak
3	* 9648.000	42.04	5.32	47.36	-26.64	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

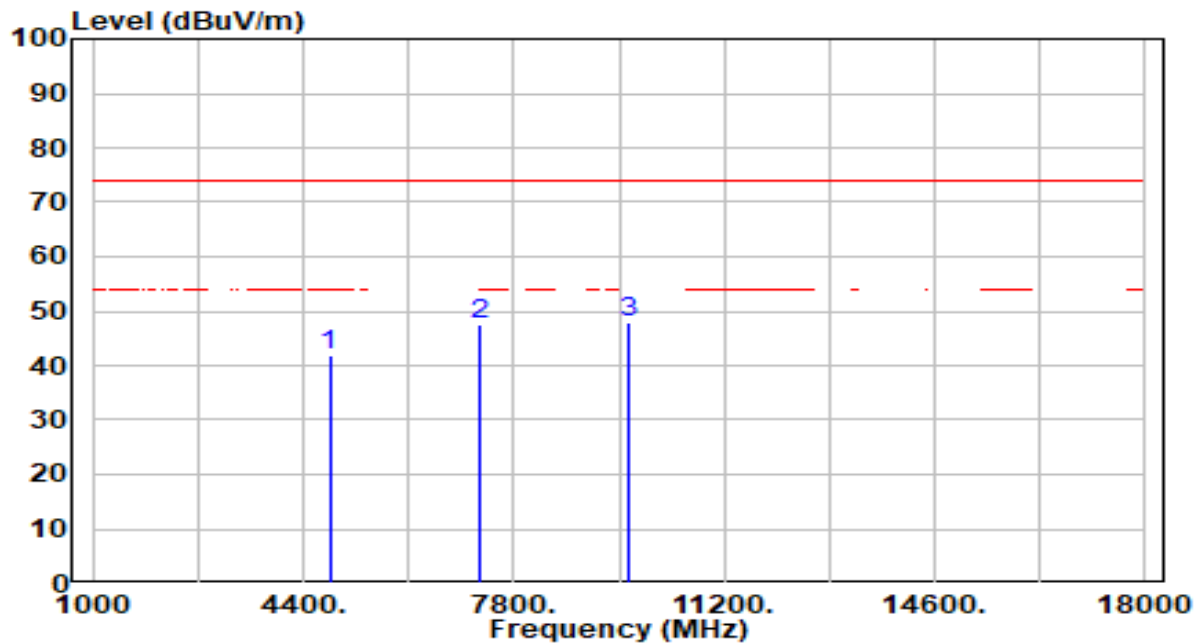


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.76	0.25	42.01	-31.99	74.00	100	210	Peak
2	7236.000	41.56	5.81	47.37	-26.63	74.00	100	180	Peak
3	* 9648.000	42.47	5.32	47.79	-26.21	74.00	100	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

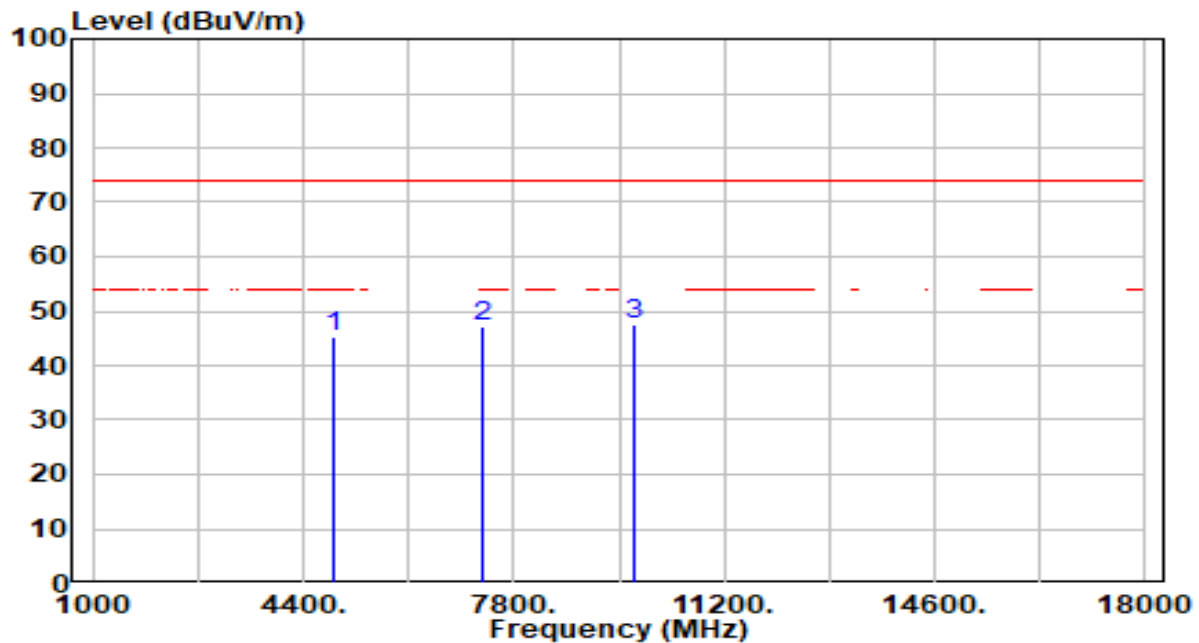


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.79	0.35	45.14	-28.86	74.00	100	345	Peak
2	7311.000	41.32	5.79	47.11	-26.89	74.00	100	0	Peak
3	* 9748.000	42.14	5.34	47.48	-26.52	74.00	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

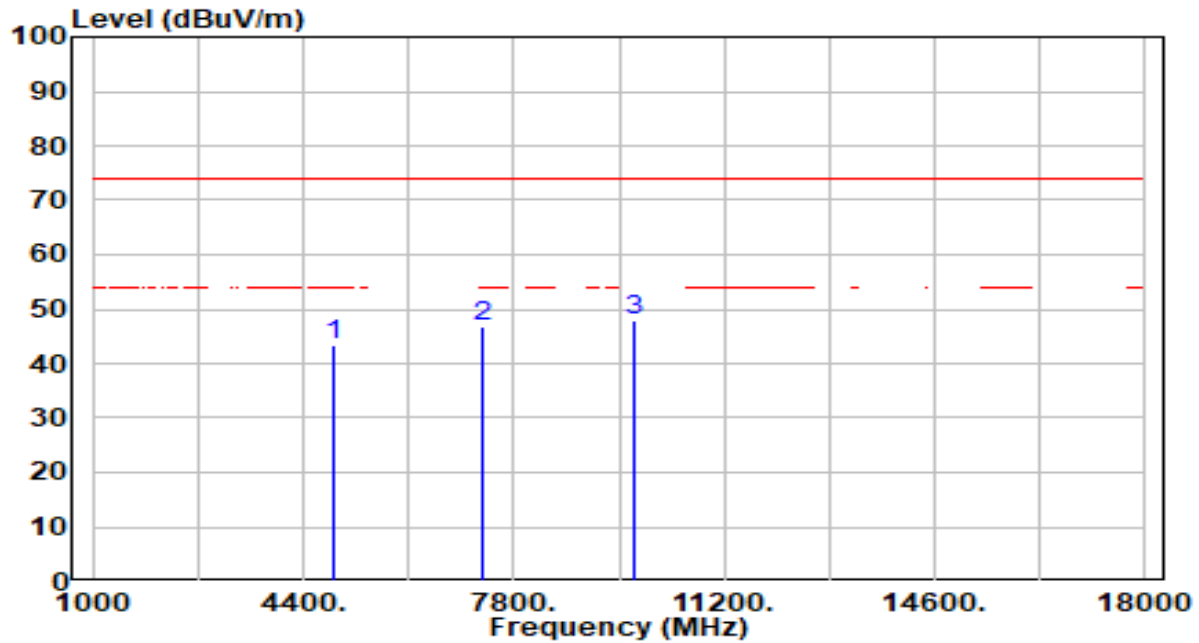


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.05	0.35	43.41	-30.59	74.00	100	20	Peak
2	7311.000	40.87	5.79	46.66	-27.34	74.00	100	220	Peak
3	* 9748.000	42.61	5.34	47.95	-26.05	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

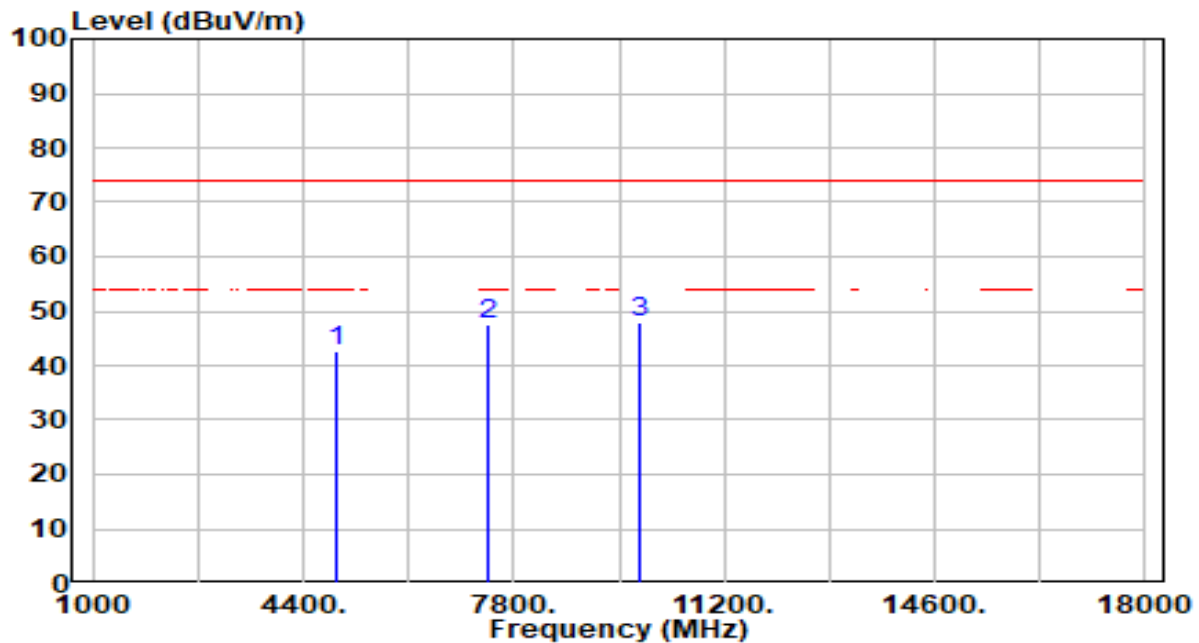


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.10	0.45	42.56	-31.44	74.00	100	330	Peak
2	7386.000	41.82	5.77	47.59	-26.41	74.00	100	135	Peak
3	* 9848.000	42.39	5.38	47.77	-26.23	74.00	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

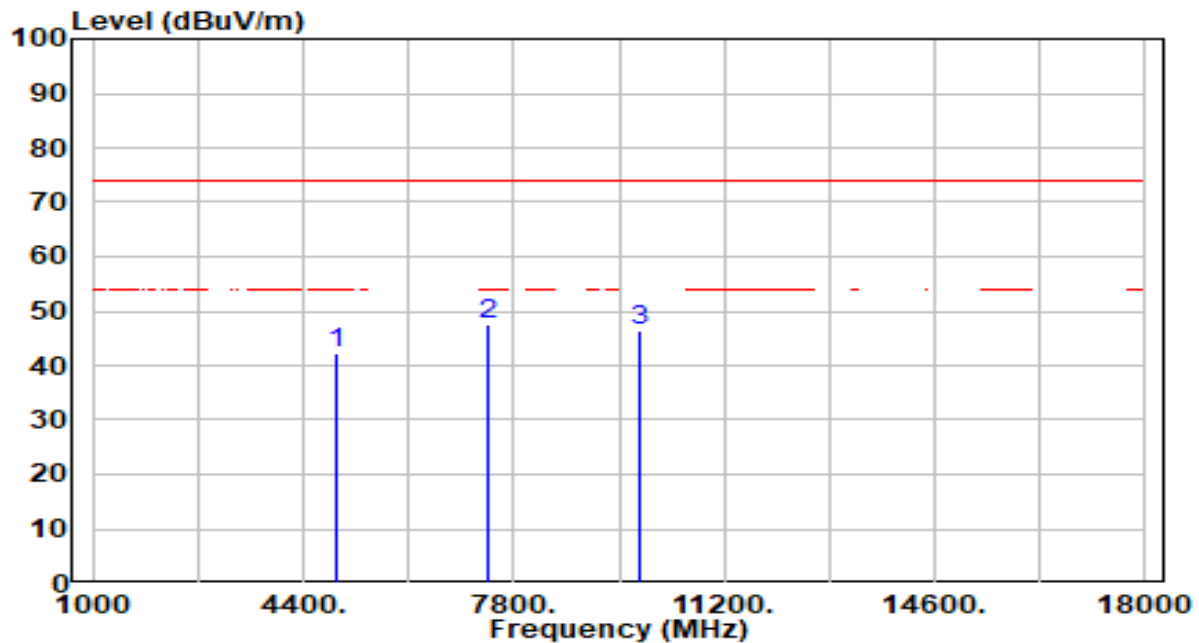


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	41.83	0.45	42.28	-31.72	74.00	100	55	Peak
2	*	7386.000	41.61	5.77	47.38	-26.62	74.00	100	360	Peak
3		9848.000	41.09	5.38	46.47	-27.53	74.00	100	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

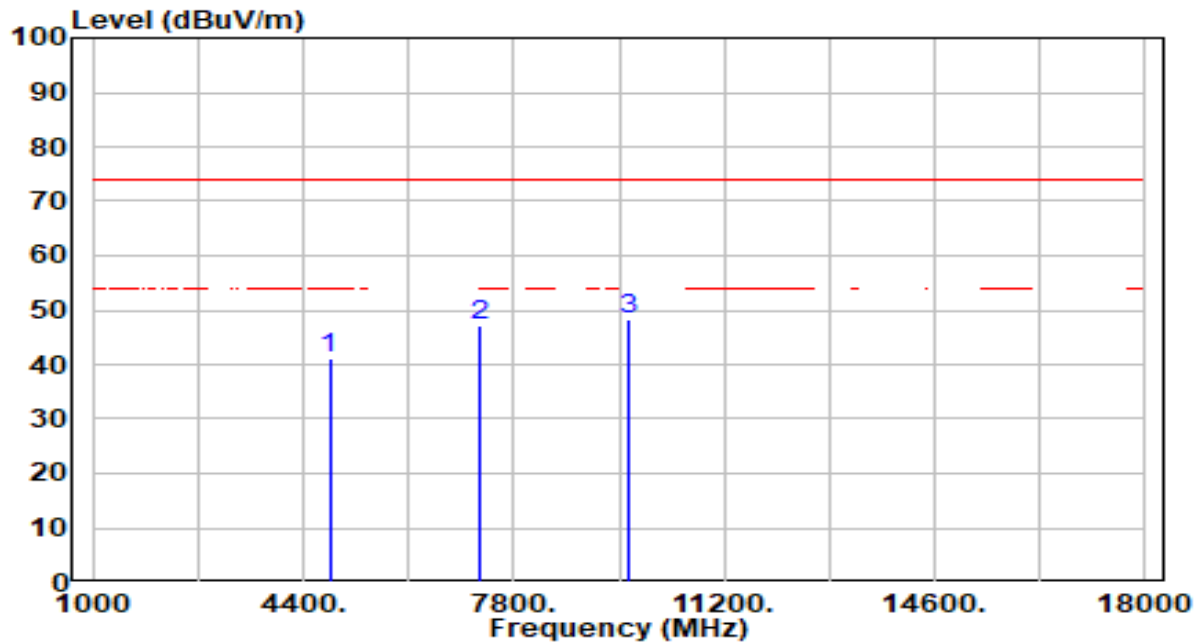


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.95	0.25	41.20	-32.80	74.00	100	300	Peak
2	7236.000	41.22	5.81	47.03	-26.97	74.00	100	360	Peak
3	* 9648.000	42.82	5.32	48.15	-25.85	74.00	100	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

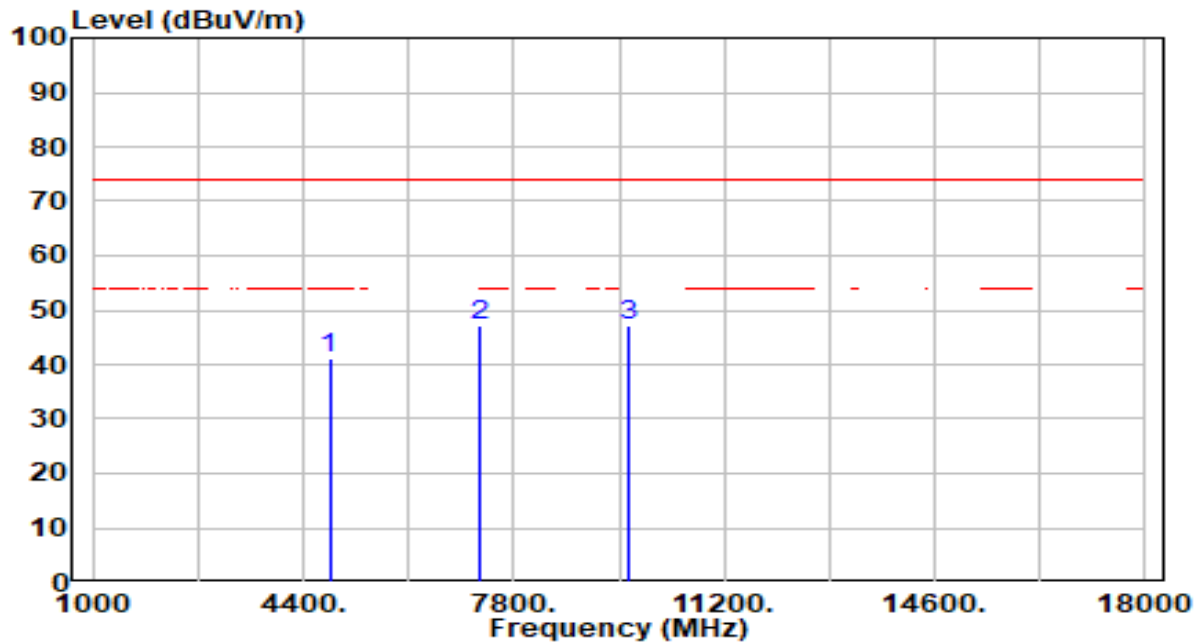


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	40.98	0.25	41.23	-32.77	74.00	100	50	Peak
2	*	7236.000	41.49	5.81	47.30	-26.70	74.00	100	5	Peak
3		9648.000	41.80	5.32	47.13	-26.87	74.00	100	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

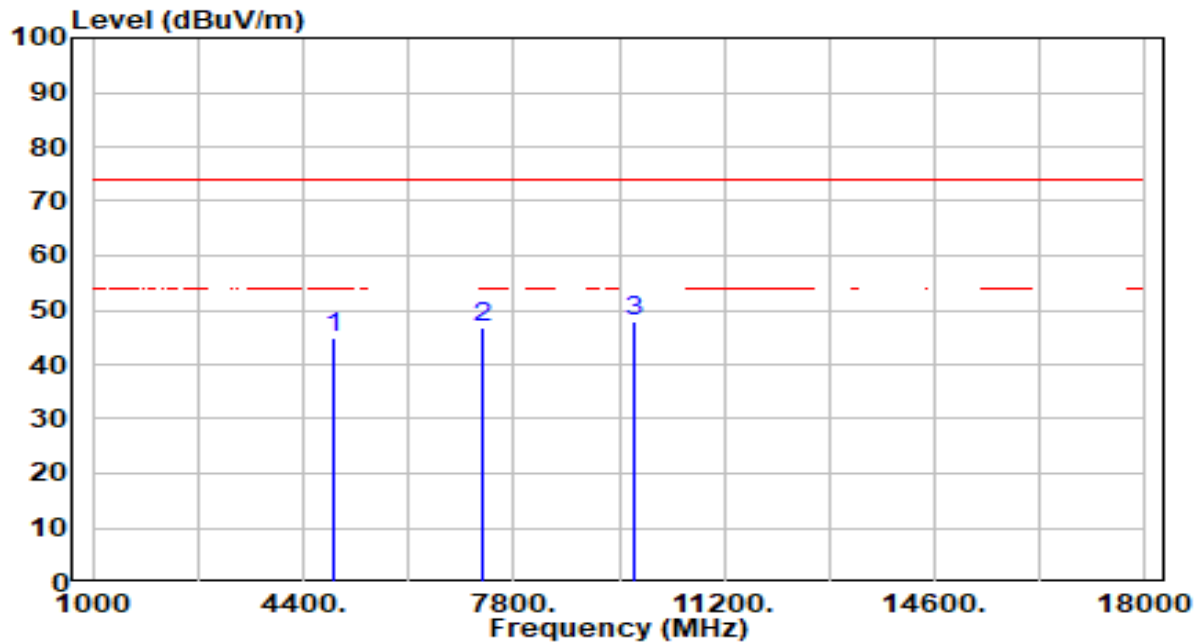


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.48	0.35	44.83	-29.17	74.00	100	25	Peak
2	7311.000	40.84	5.79	46.63	-27.37	74.00	100	180	Peak
3	* 9748.000	42.52	5.34	47.86	-26.14	74.00	100	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

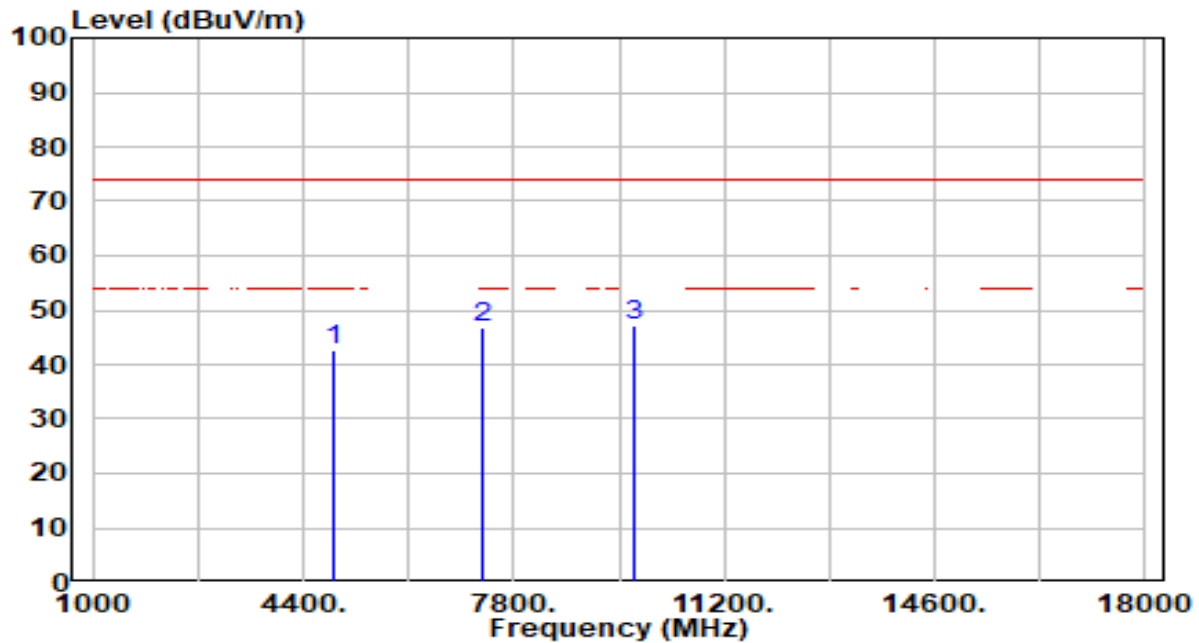


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.45	0.35	42.80	-31.20	74.00	100	20	Peak
2	7311.000	40.89	5.79	46.68	-27.32	74.00	100	45	Peak
3	* 9748.000	41.82	5.34	47.16	-26.84	74.00	100	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

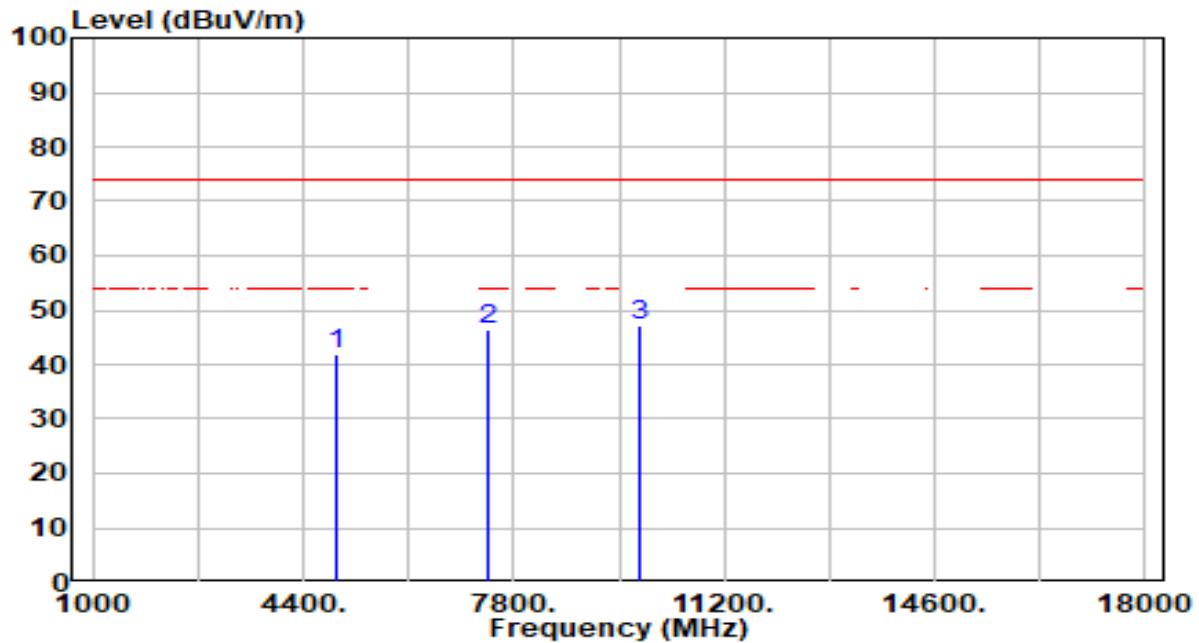


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.42	0.45	41.88	-32.12	74.00	100	260	Peak
2	7386.000	40.80	5.77	46.57	-27.43	74.00	100	285	Peak
3	* 9848.000	41.79	5.38	47.17	-26.83	74.00	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

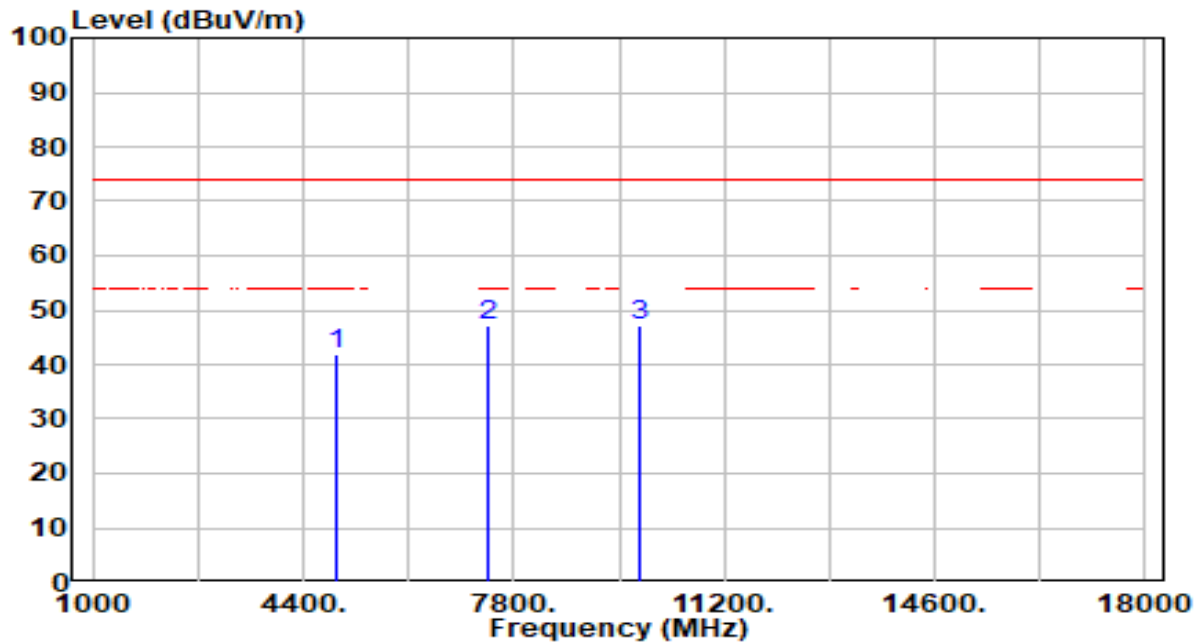


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	41.44	0.45	41.90	-32.10	74.00	100	290	Peak
2	*	7386.000	41.55	5.77	47.32	-26.68	74.00	100	290	Peak
3		9848.000	41.73	5.38	47.11	-26.89	74.00	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

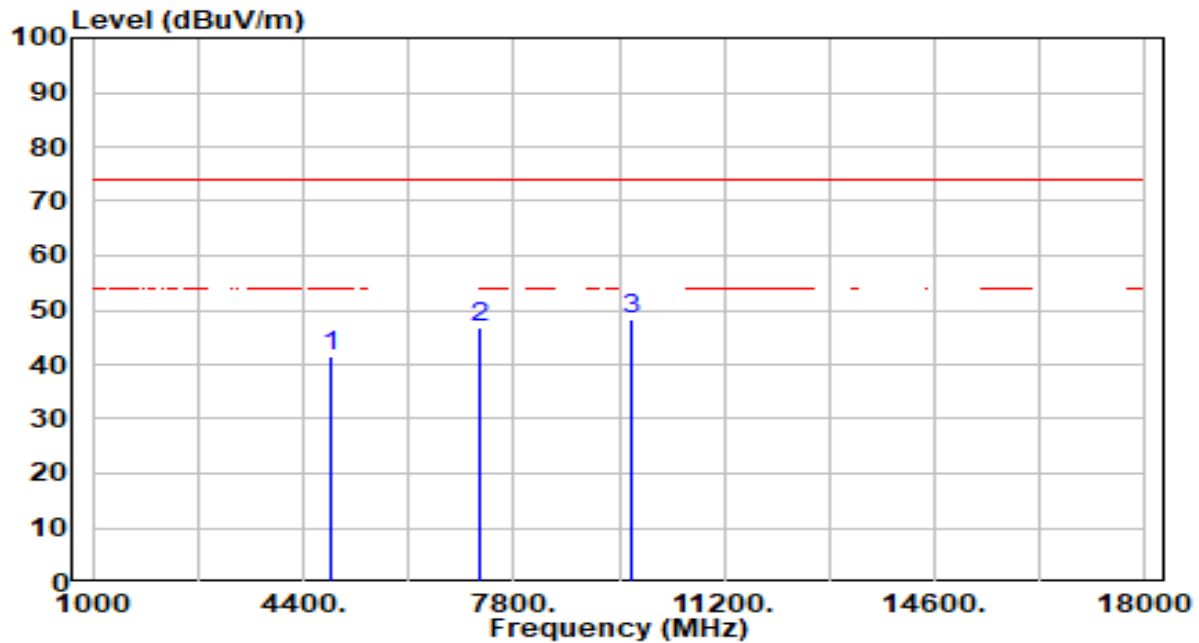


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	41.38	0.29	41.67	-32.33	74.00	100	275	Peak
2	7266.000	41.05	5.81	46.86	-27.14	74.00	100	220	Peak
3	* 9688.000	42.87	5.33	48.20	-25.80	74.00	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

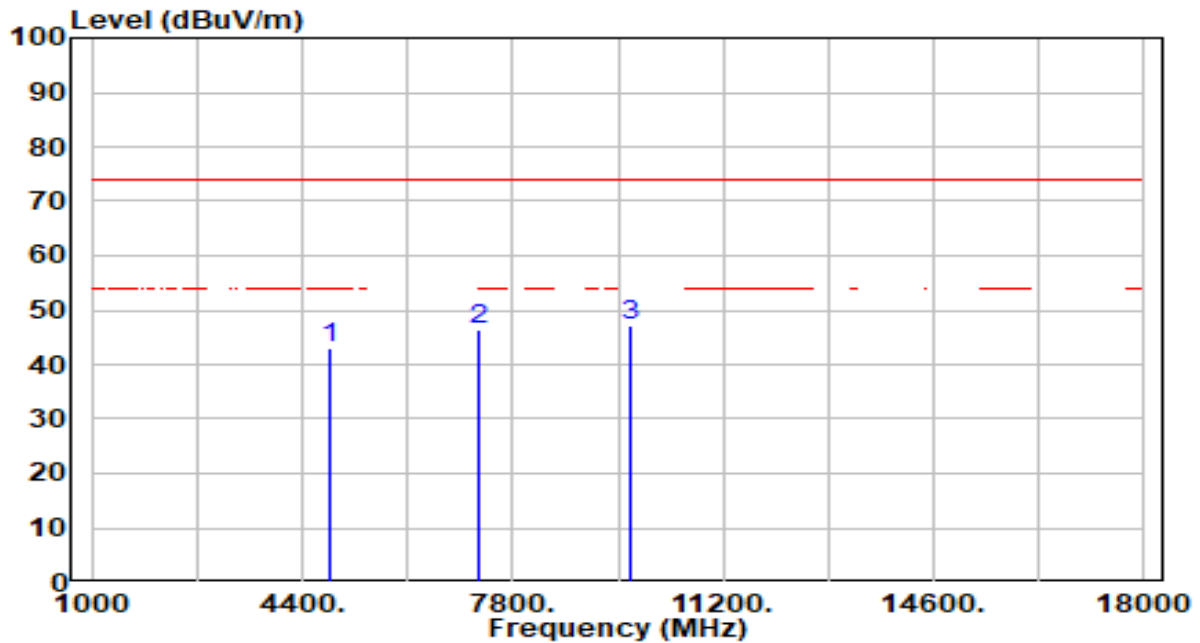


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	42.62	0.29	42.91	-31.09	74.00	100	140	Peak
2	7266.000	40.77	5.81	46.57	-27.43	74.00	100	145	Peak
3	* 9688.000	41.81	5.33	47.14	-26.86	74.00	100	220	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

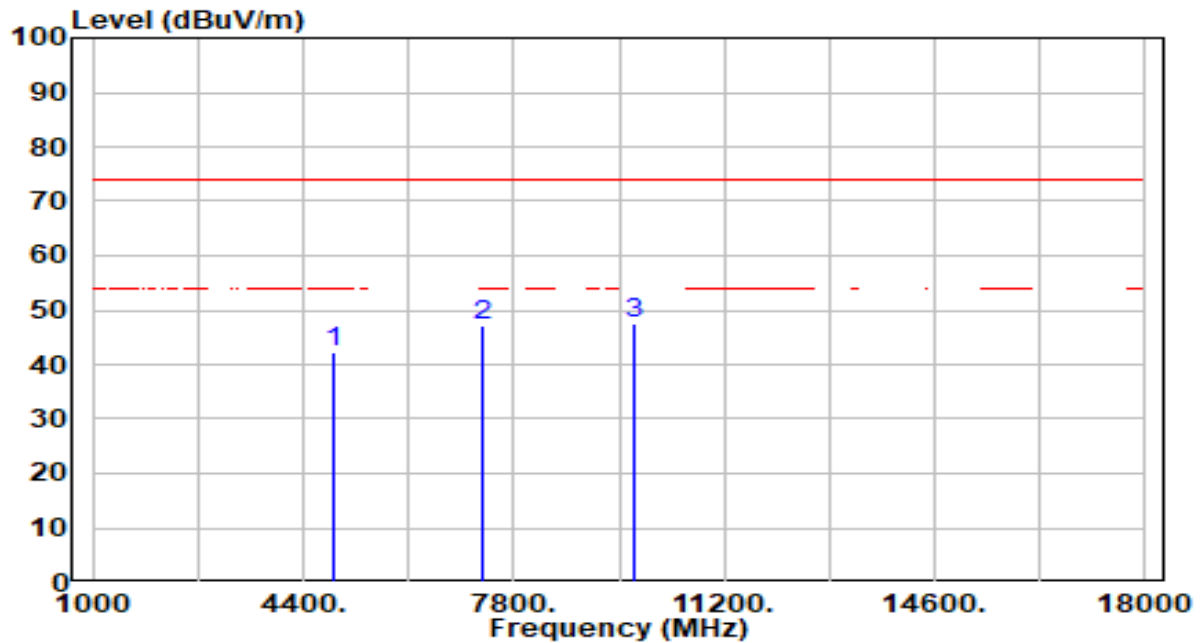


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.06	0.35	42.41	-31.59	74.00	100	20	Peak
2	7311.000	41.22	5.79	47.01	-26.99	74.00	100	325	Peak
3	* 9748.000	42.06	5.34	47.40	-26.60	74.00	100	90	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

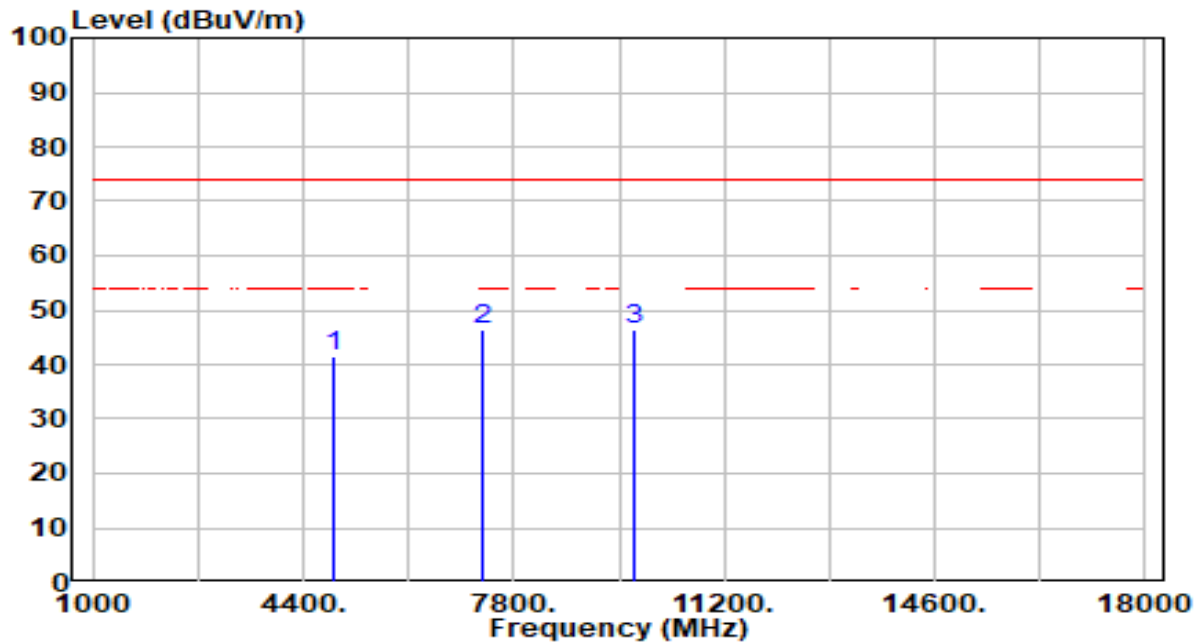


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.23	0.35	41.58	-32.42	74.00	100	110	Peak
2	7311.000	40.59	5.79	46.38	-27.62	74.00	100	105	Peak
3	* 9748.000	41.12	5.34	46.46	-27.54	74.00	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

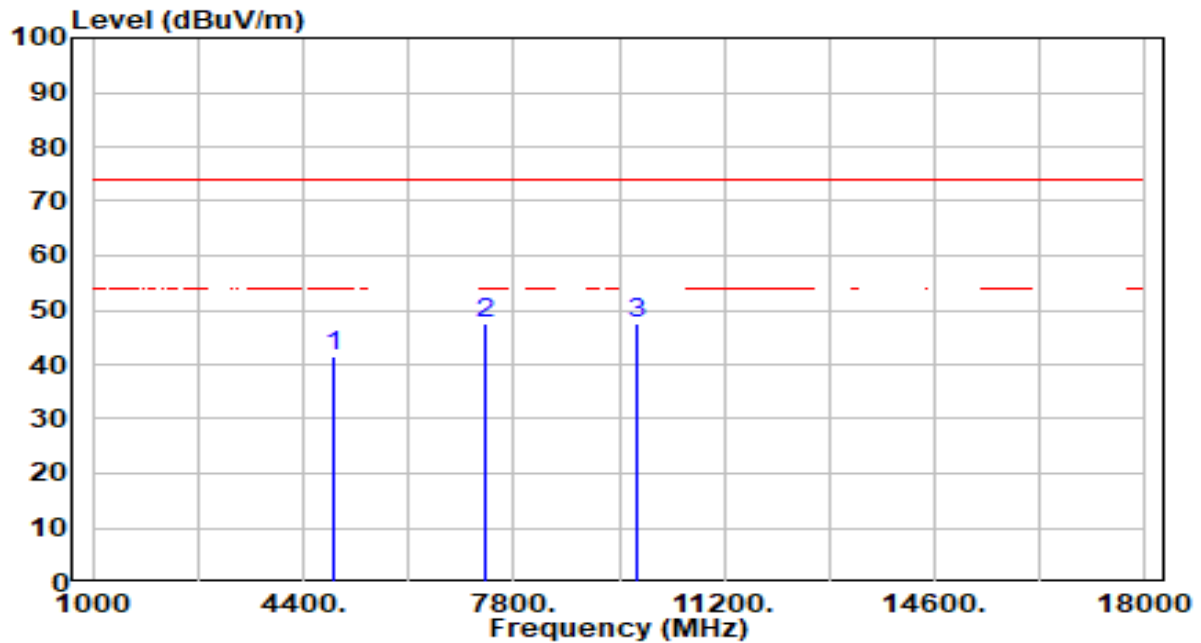


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.17	0.41	41.59	-32.41	74.00	100	0	Peak
2	7356.000	41.61	5.78	47.39	-26.61	74.00	100	0	Peak
3	* 9808.000	42.16	5.35	47.52	-26.48	74.00	100	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

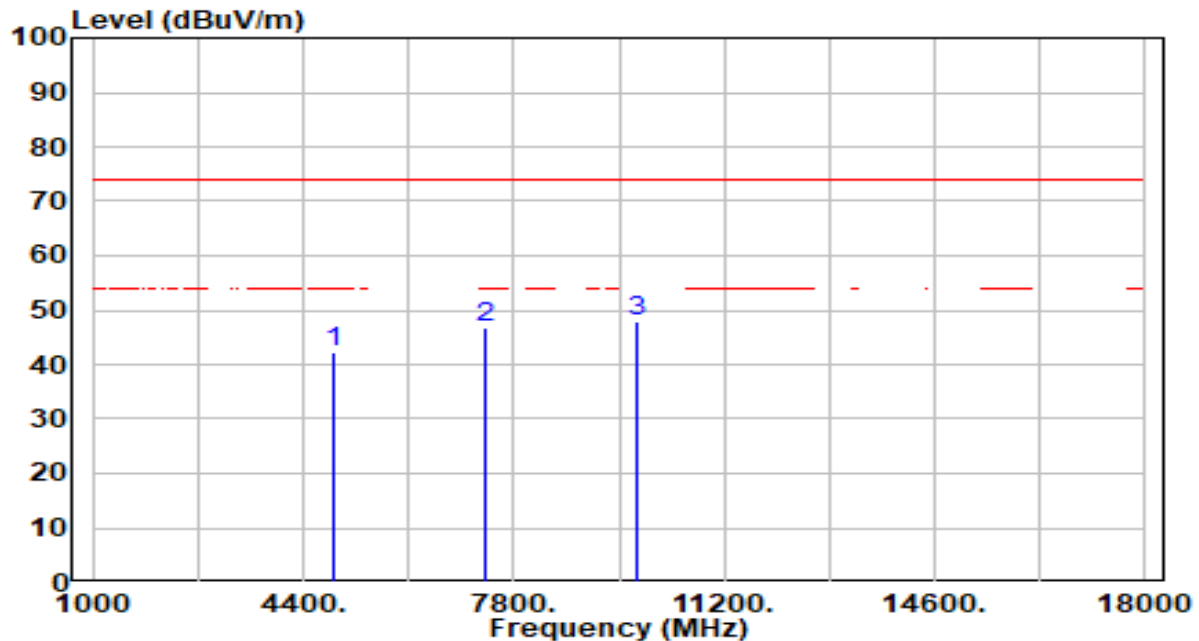


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.68	0.41	42.09	-31.91	74.00	100	100	Peak
2	7356.000	41.12	5.78	46.90	-27.10	74.00	100	275	Peak
3	* 9808.000	42.51	5.35	47.87	-26.13	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

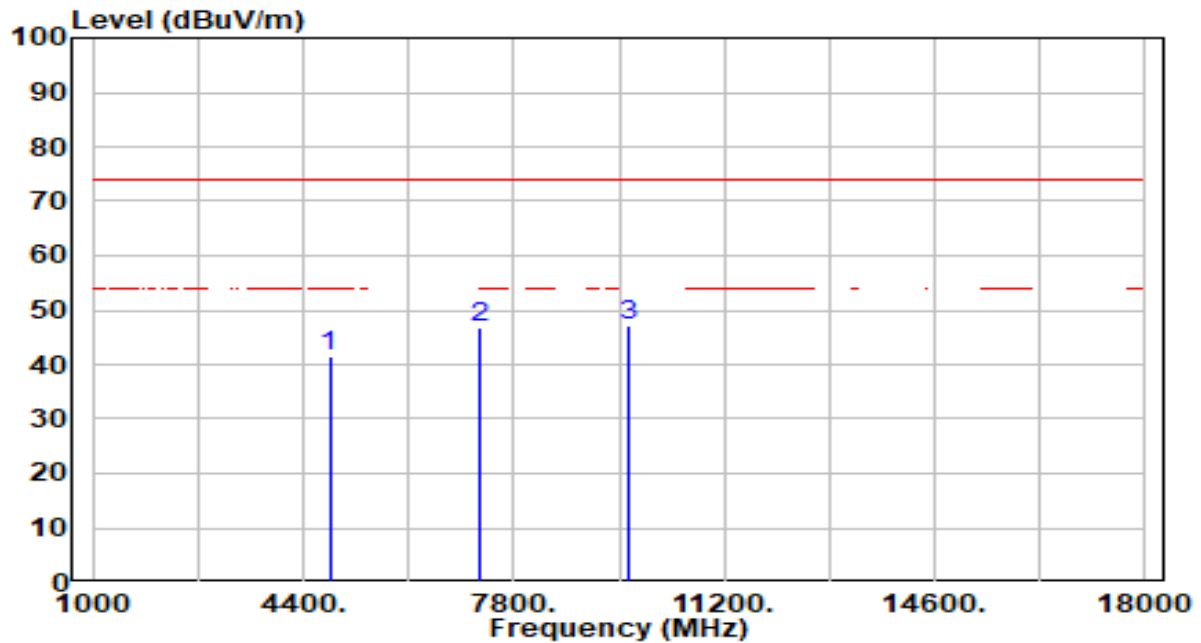


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.23	0.25	41.48	-32.52	74.00	100	75	Peak
2	7236.000	40.99	5.81	46.81	-27.19	74.00	100	260	Peak
3	* 9648.000	41.89	5.32	47.22	-26.78	74.00	100	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

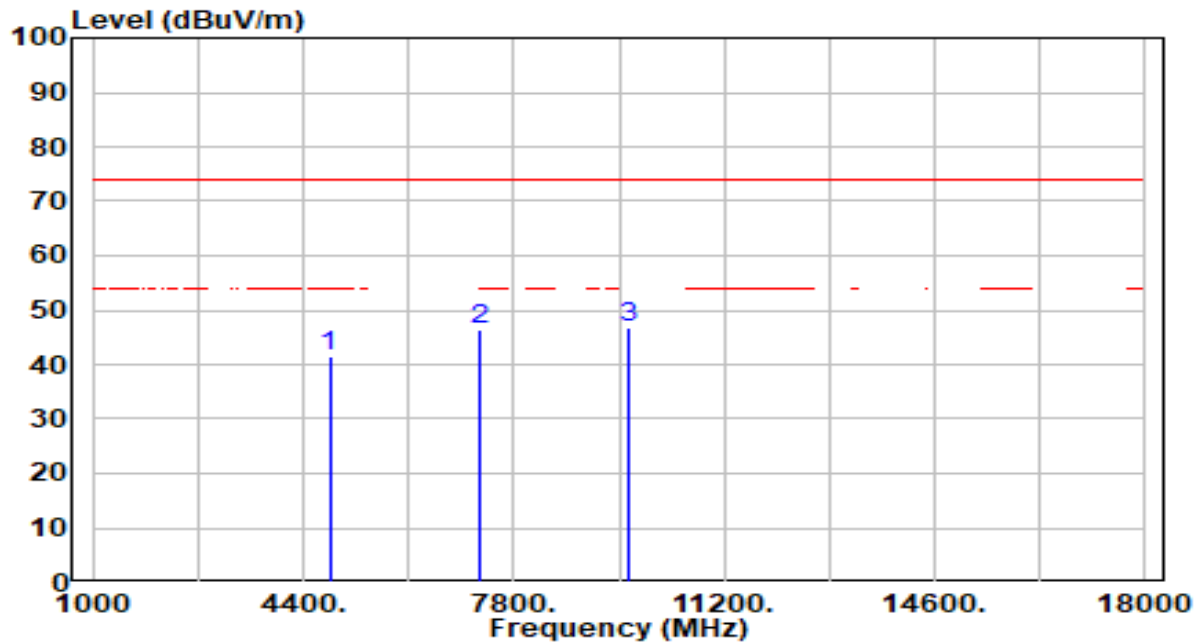


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.24	0.25	41.49	-32.51	74.00	100	220	Peak
2	7236.000	40.57	5.81	46.38	-27.62	74.00	100	10	Peak
3	* 9648.000	41.38	5.32	46.70	-27.30	74.00	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

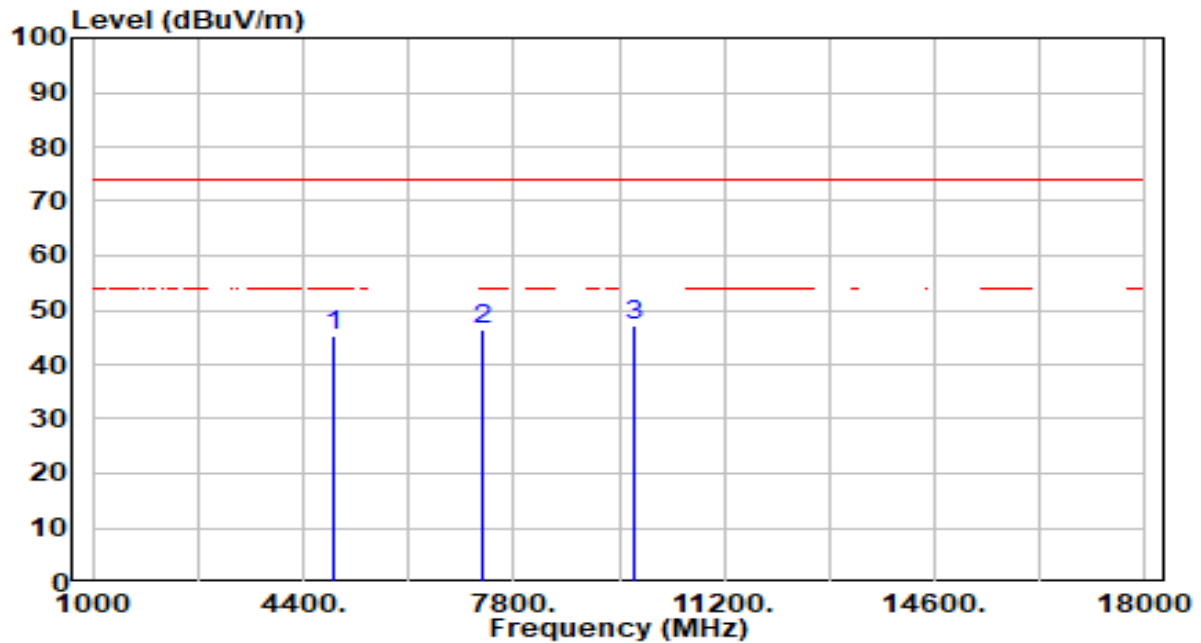


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.94	0.35	45.29	-28.71	74.00	100	30	Peak
2	7311.000	40.66	5.79	46.45	-27.55	74.00	100	155	Peak
3	* 9748.000	41.89	5.34	47.23	-26.77	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

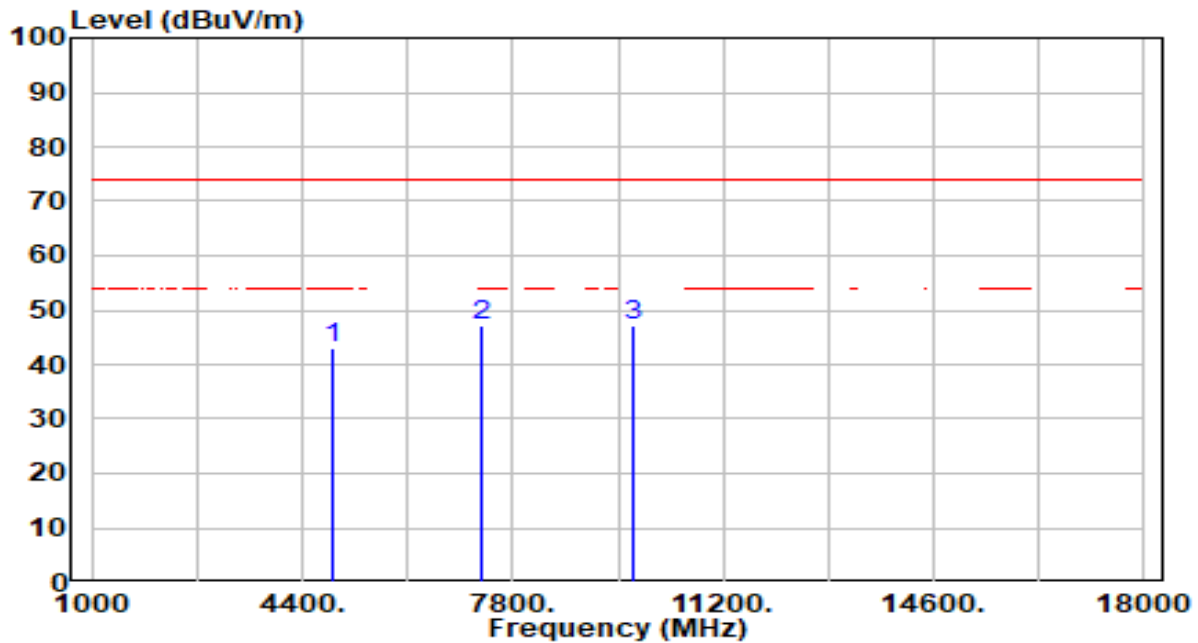


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	42.65	0.35	43.00	-31.00	74.00	100	40	Peak
2	*	7311.000	41.47	5.79	47.26	-26.74	74.00	100	165	Peak
3		9748.000	41.73	5.34	47.07	-26.93	74.00	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

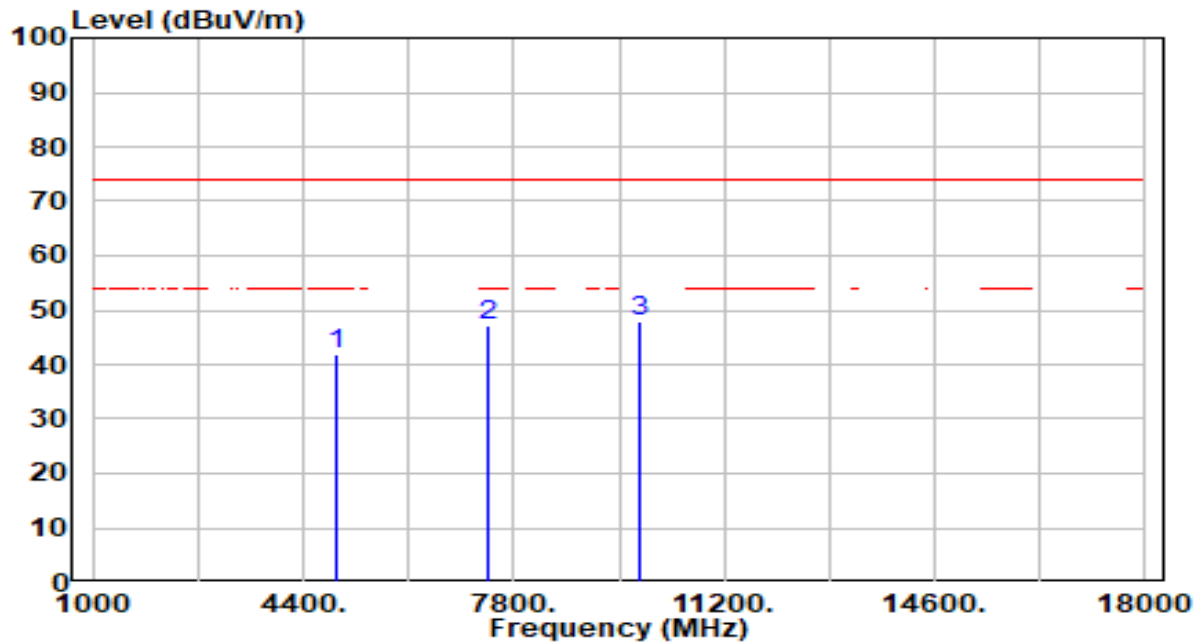


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.34	0.45	41.79	-32.21	74.00	100	285	Peak
2	7386.000	41.34	5.77	47.11	-26.89	74.00	100	285	Peak
3	* 9848.000	42.37	5.38	47.75	-26.25	74.00	100	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

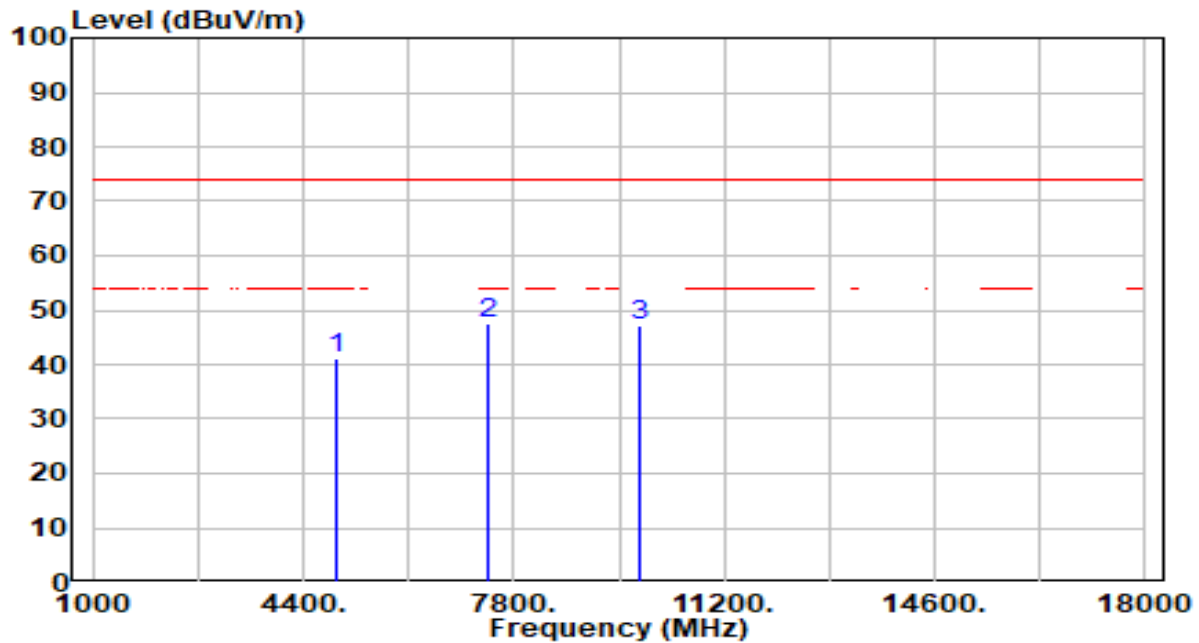


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	40.85	0.45	41.30	-32.70	74.00	100	35	Peak
2	*	7386.000	41.80	5.77	47.57	-26.43	74.00	100	0	Peak
3		9848.000	41.93	5.38	47.31	-26.69	74.00	100	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

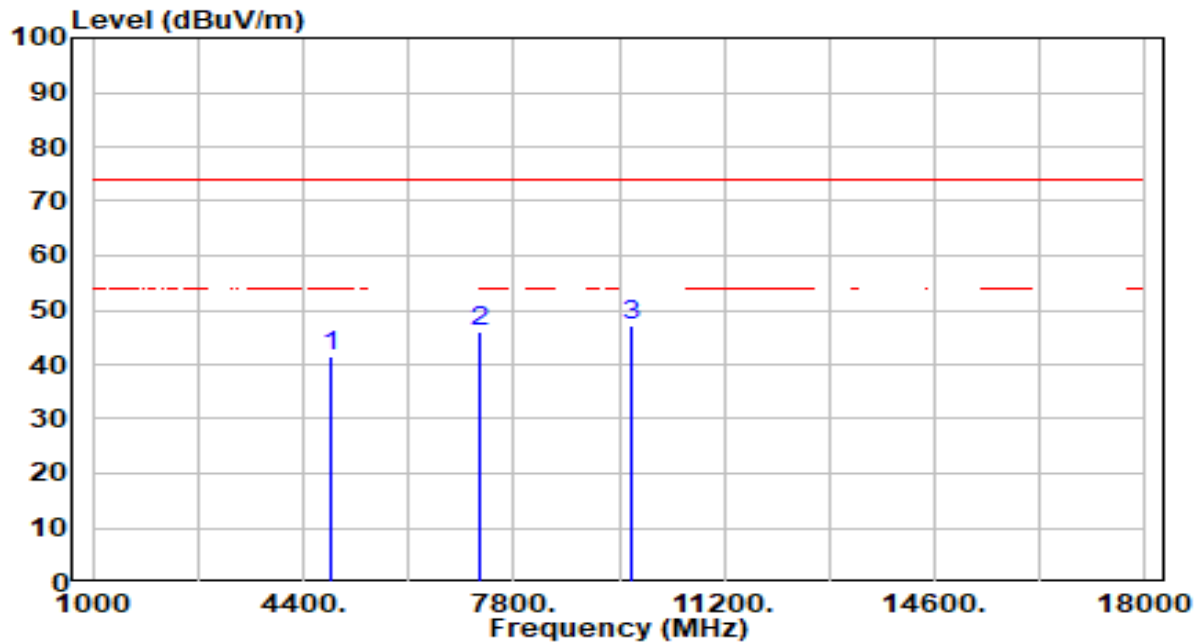


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	41.33	0.29	41.62	-32.38	74.00	100	15	Peak
2	7266.000	40.33	5.81	46.14	-27.86	74.00	100	15	Peak
3	* 9688.000	41.77	5.33	47.10	-26.90	74.00	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

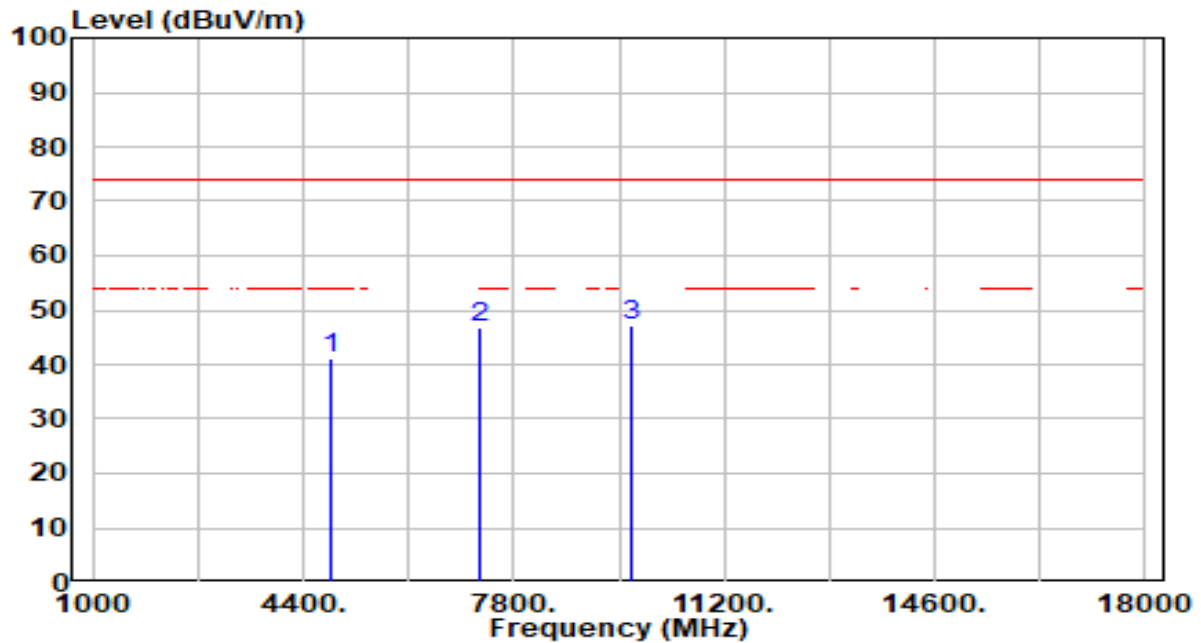


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	41.00	0.29	41.29	-32.71	74.00	100	315	Peak
2	7266.000	40.83	5.81	46.64	-27.36	74.00	100	90	Peak
3	* 9688.000	42.00	5.33	47.33	-26.67	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

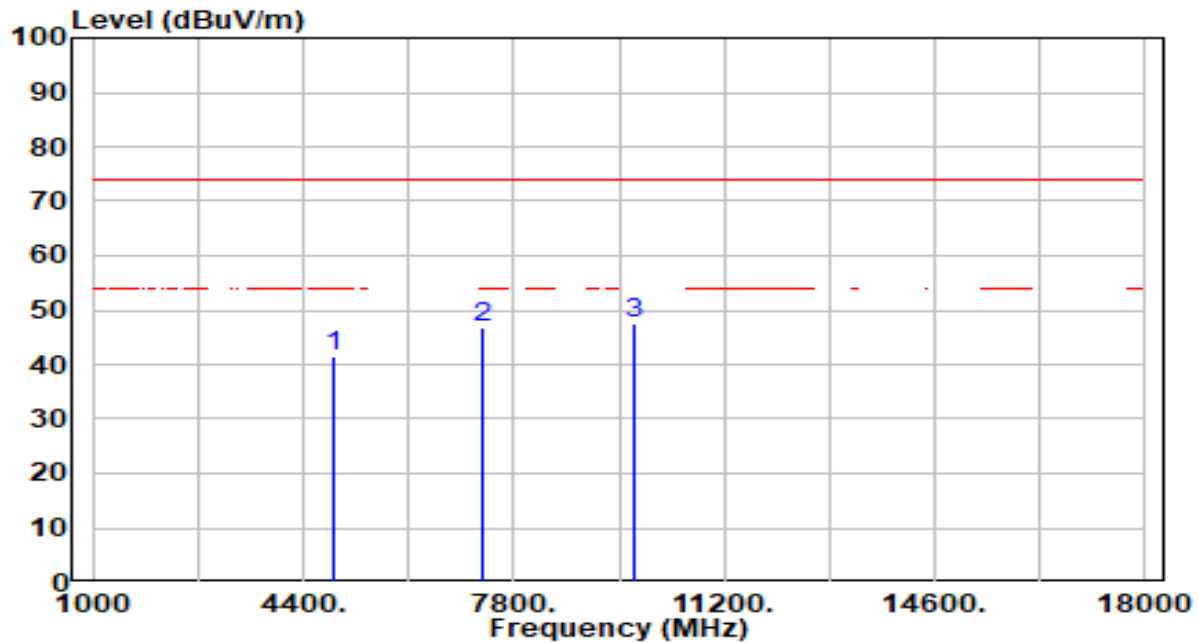


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.23	0.35	41.58	-32.42	74.00	100	205	Peak
2	7311.000	41.06	5.79	46.85	-27.15	74.00	100	250	Peak
3	* 9748.000	42.06	5.34	47.40	-26.60	74.00	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

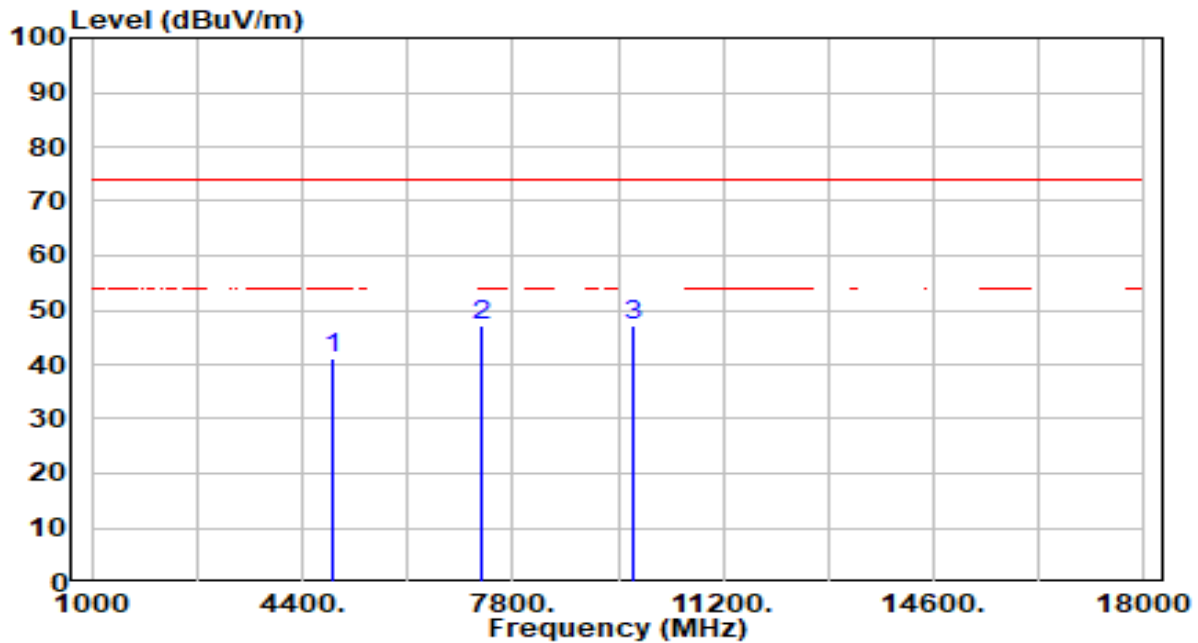


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.95	0.35	41.31	-32.69	74.00	100	225	Peak
2	7311.000	41.41	5.79	47.20	-26.80	74.00	100	35	Peak
3	* 9748.000	41.99	5.34	47.33	-26.67	74.00	100	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

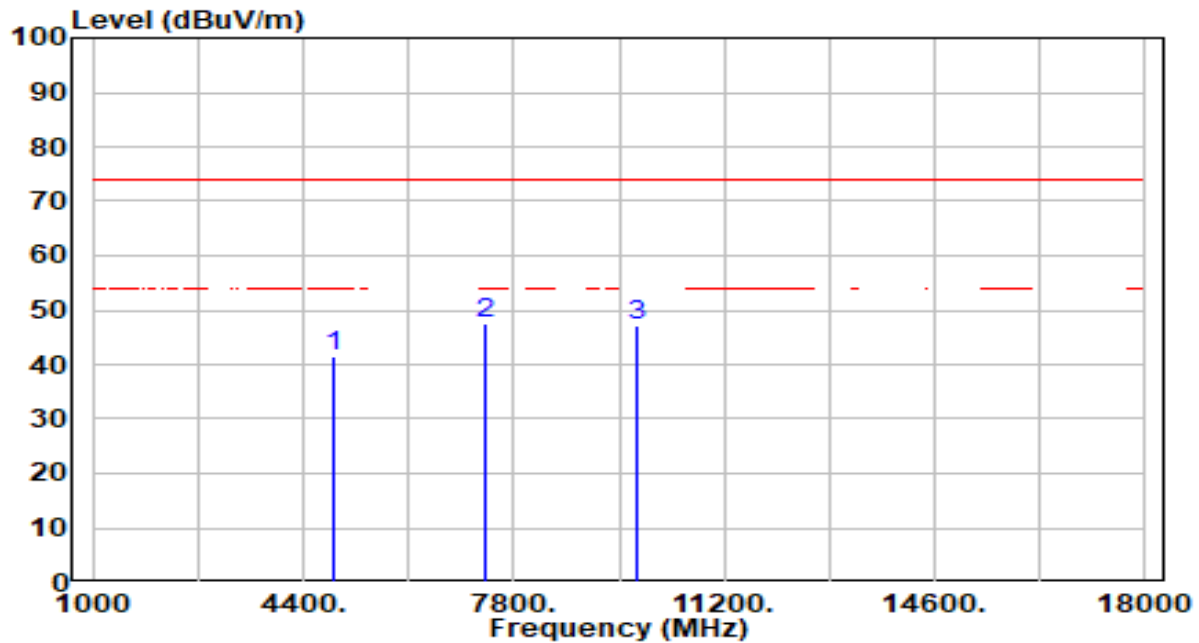


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.01	0.41	41.42	-32.58	74.00	100	160	Peak
2	* 7356.000	41.62	5.78	47.41	-26.59	74.00	100	15	Peak
3	9808.000	41.86	5.35	47.22	-26.78	74.00	100	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

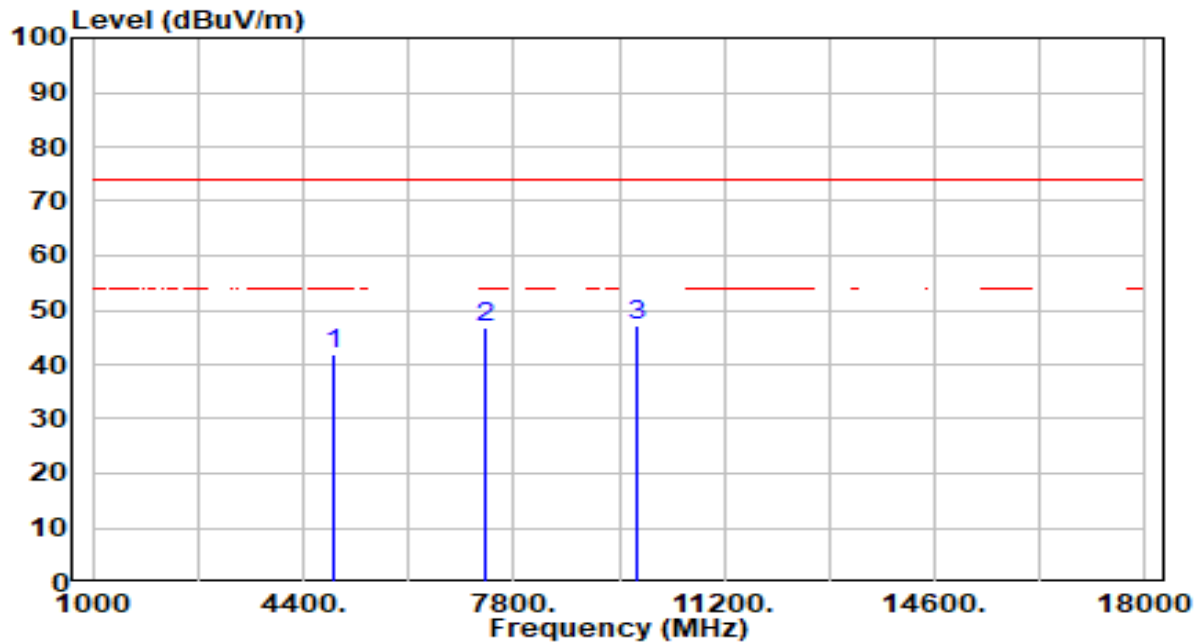


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.47	0.41	41.89	-32.11	74.00	100	135	Peak
2	7356.000	40.91	5.78	46.69	-27.31	74.00	100	175	Peak
3	* 9808.000	41.96	5.35	47.32	-26.68	74.00	100	85	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical Antenna

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

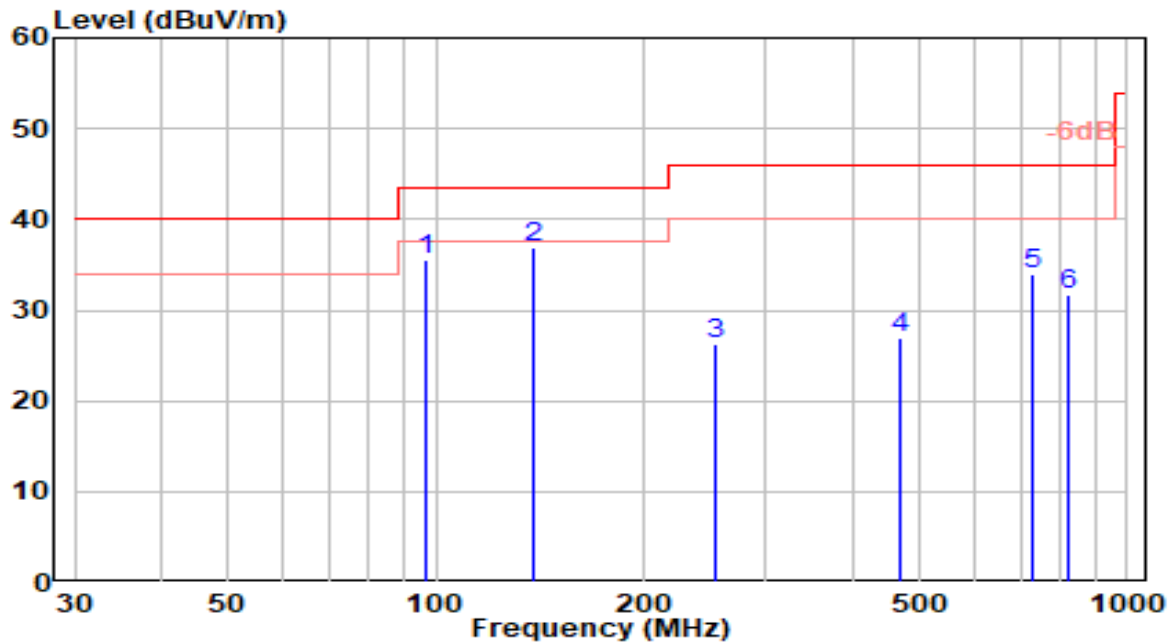


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		97.040	16.83	18.80	35.63	-7.87	43.50	200	130	QP
2	*	138.520	21.22	15.64	36.86	-6.64	43.50	200	295	QP
3		254.750	5.49	20.79	26.28	-19.72	46.00	200	255	QP
4		468.410	2.12	24.90	27.03	-18.97	46.00	100	35	QP
5		727.970	4.68	29.30	33.98	-12.02	46.00	200	225	QP
6		825.330	1.36	30.41	31.77	-14.23	46.00	200	210	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

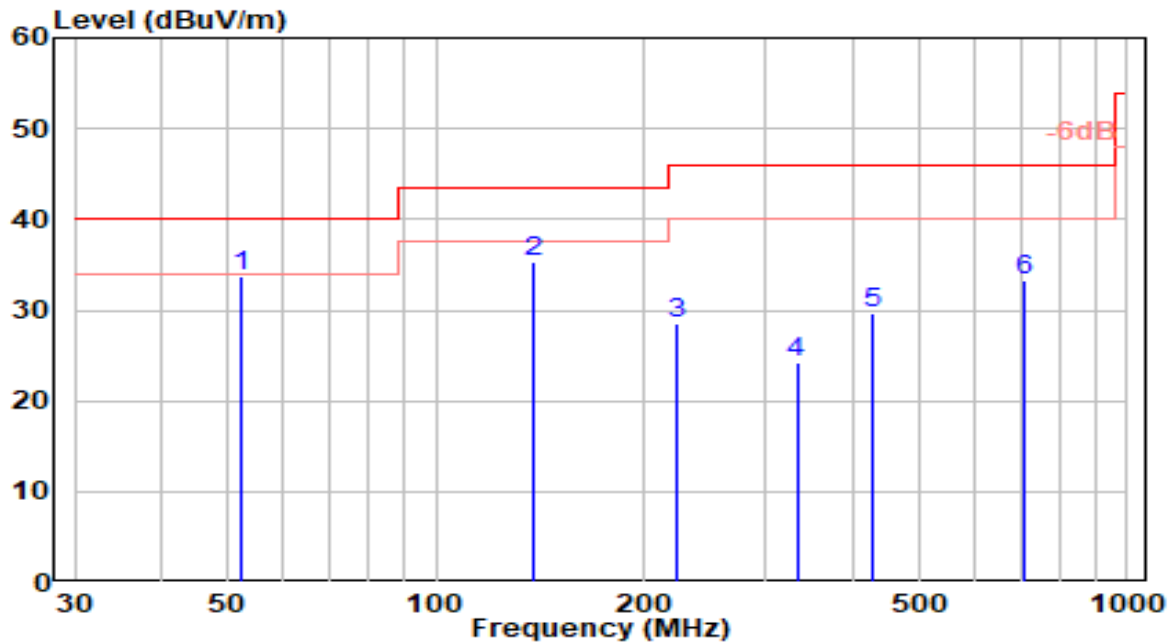


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	52.420	12.56	21.22	33.78	-6.22	40.00	100	250	QP
2		138.520	19.65	15.64	35.29	-8.21	43.50	100	80	QP
3		222.740	9.32	19.26	28.58	-17.42	46.00	100	30	QP
4		332.610	1.76	22.40	24.15	-21.85	46.00	200	30	QP
5		426.300	5.32	24.25	29.56	-16.44	46.00	100	80	QP
6		711.840	4.31	29.08	33.39	-12.61	46.00	200	155	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

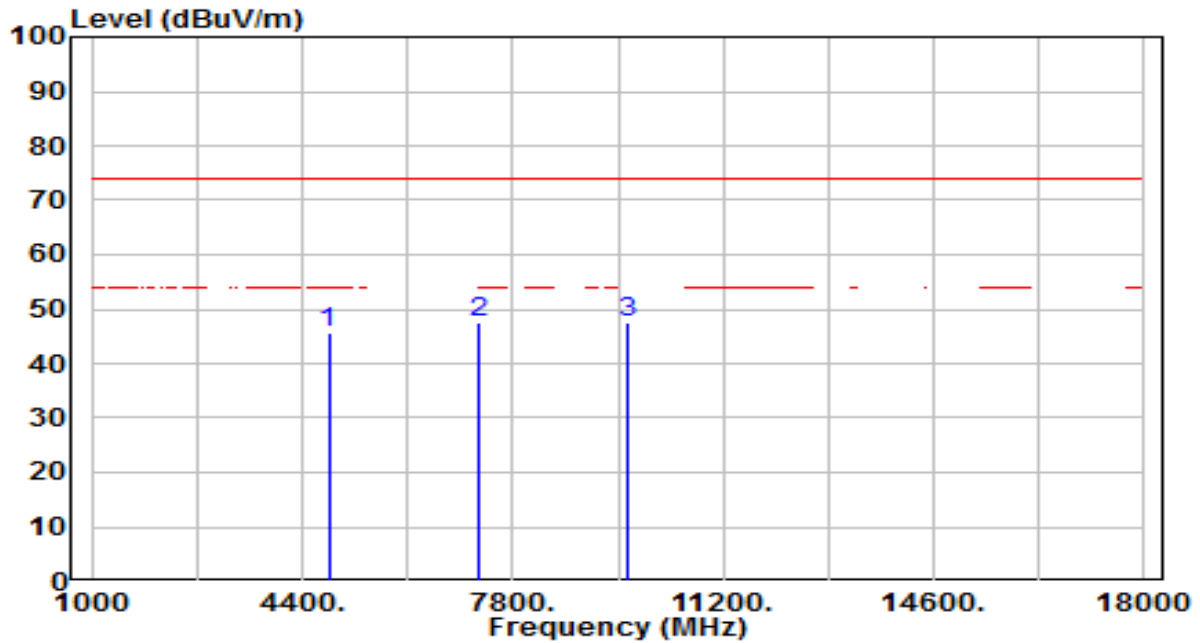


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	45.39	0.25	45.64	-28.36	74.00	300	35	Peak
2	7236.000	41.61	5.81	47.42	-26.58	74.00	100	70	Peak
3	* 9648.000	42.38	5.32	47.71	-26.29	74.00	300	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

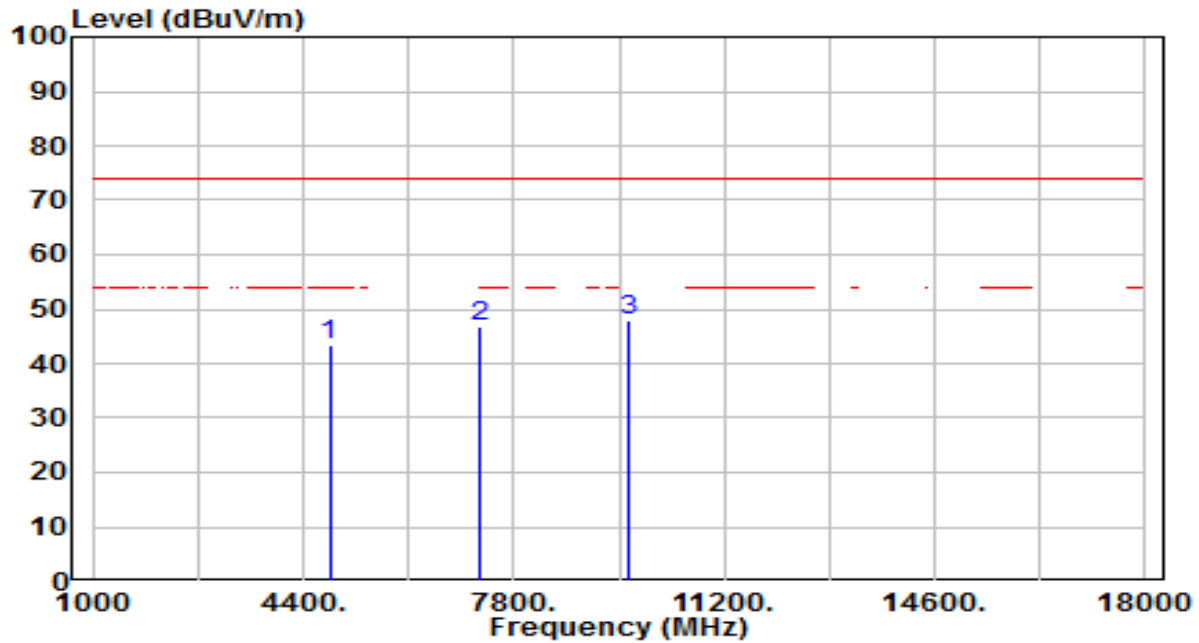


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.99	0.25	43.24	-30.76	74.00	300	195	Peak
2	7236.000	40.98	5.81	46.80	-27.20	74.00	200	260	Peak
3	* 9648.000	42.52	5.32	47.84	-26.16	74.00	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

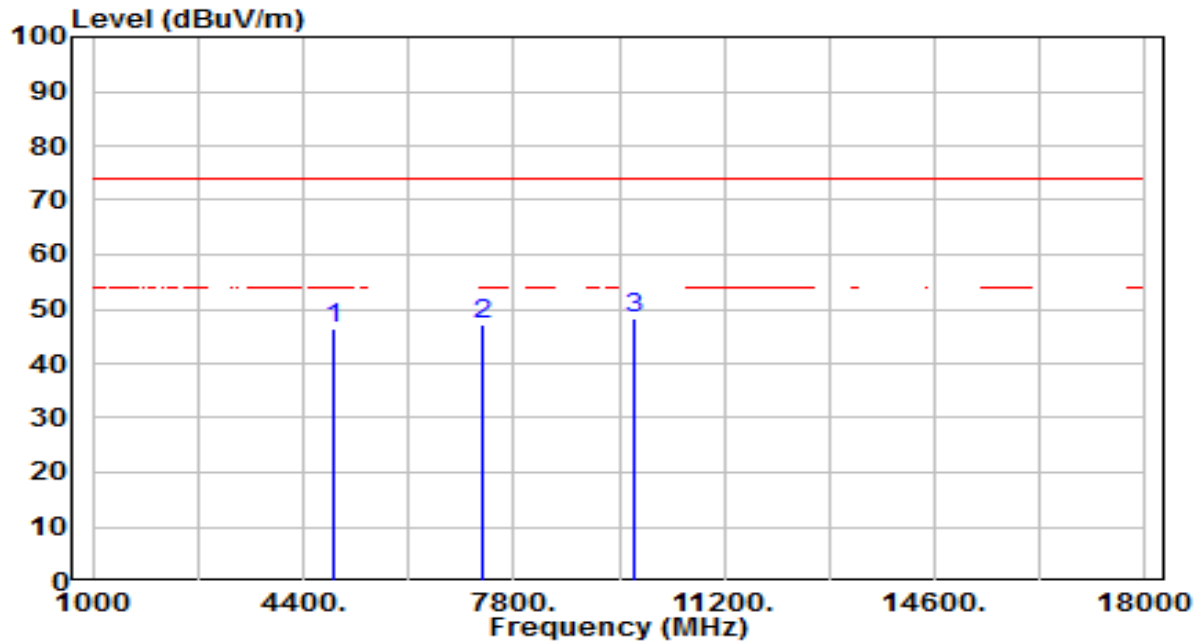


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	45.89	0.35	46.24	-27.76	74.00	300	15	Peak
2	7311.000	41.23	5.79	47.02	-26.98	74.00	300	30	Peak
3	* 9748.000	42.95	5.34	48.29	-25.71	74.00	300	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

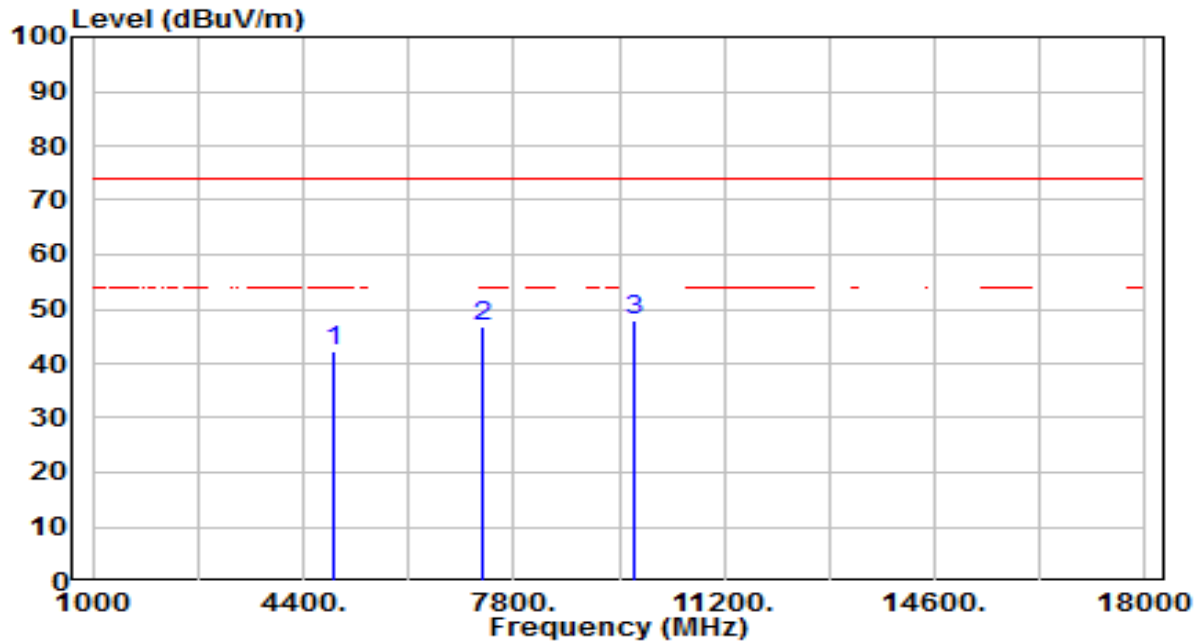


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.09	0.35	42.45	-31.55	74.00	300	45	Peak
2	7311.000	41.06	5.79	46.85	-27.15	74.00	100	0	Peak
3	* 9748.000	42.62	5.34	47.96	-26.04	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

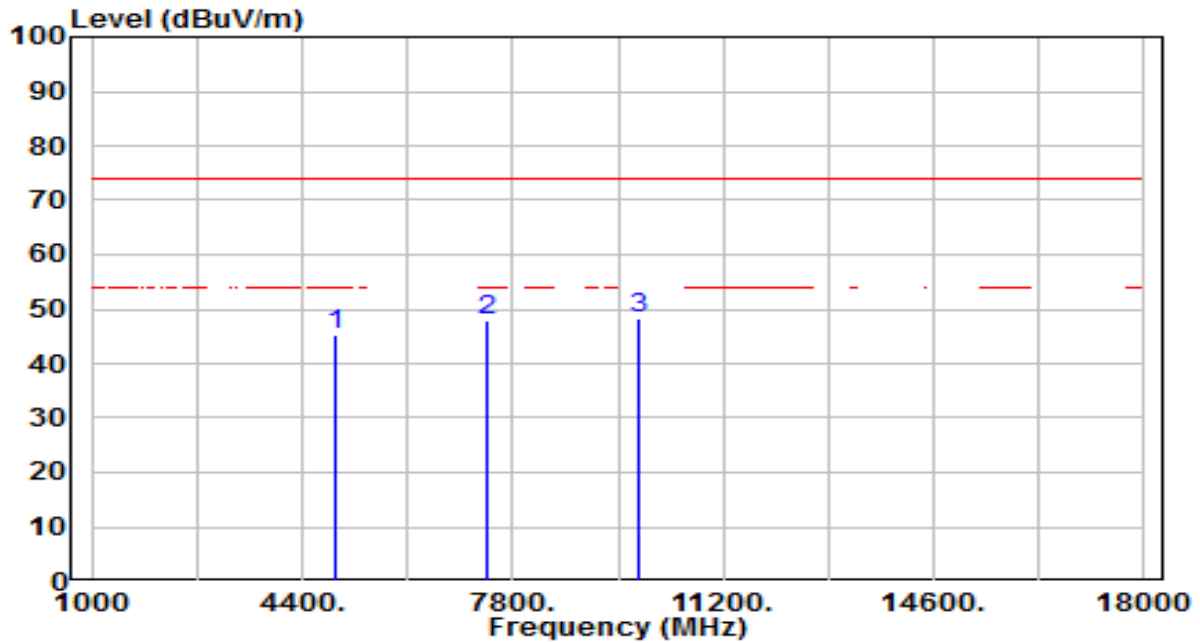


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	44.71	0.45	45.17	-28.83	74.00	300	0	Peak
2	7386.000	42.14	5.77	47.91	-26.09	74.00	300	215	Peak
3	* 9848.000	42.75	5.38	48.13	-25.87	74.00	300	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

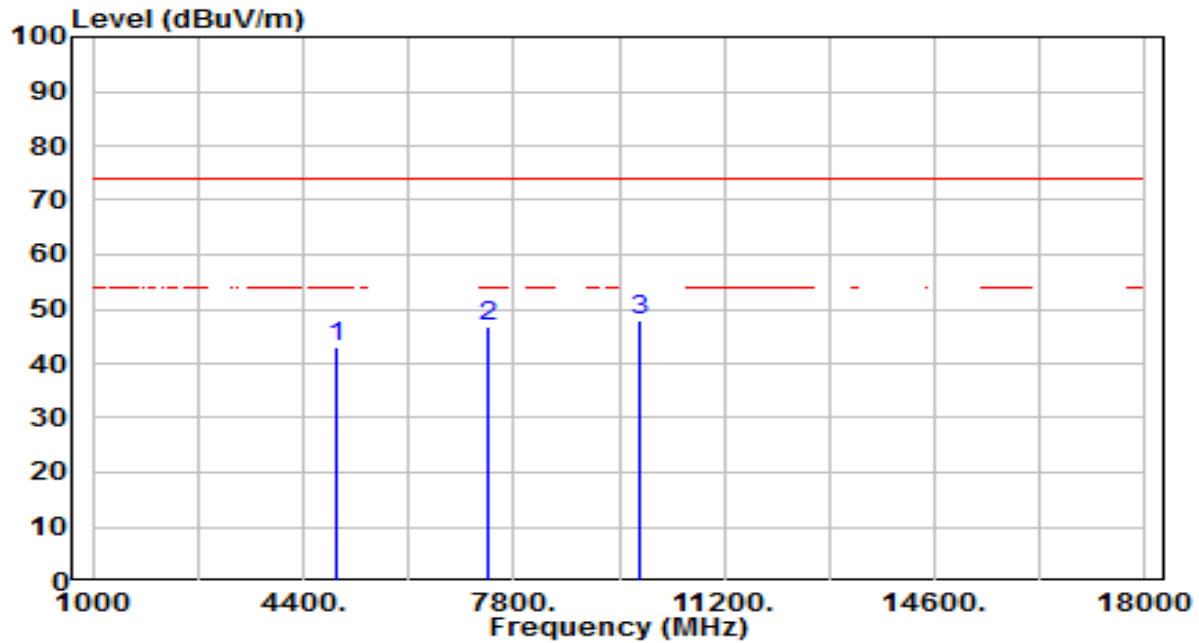


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.45	0.45	42.91	-31.09	74.00	300	30	Peak
2	7386.000	41.00	5.77	46.77	-27.23	74.00	300	360	Peak
3	* 9848.000	42.44	5.38	47.82	-26.18	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

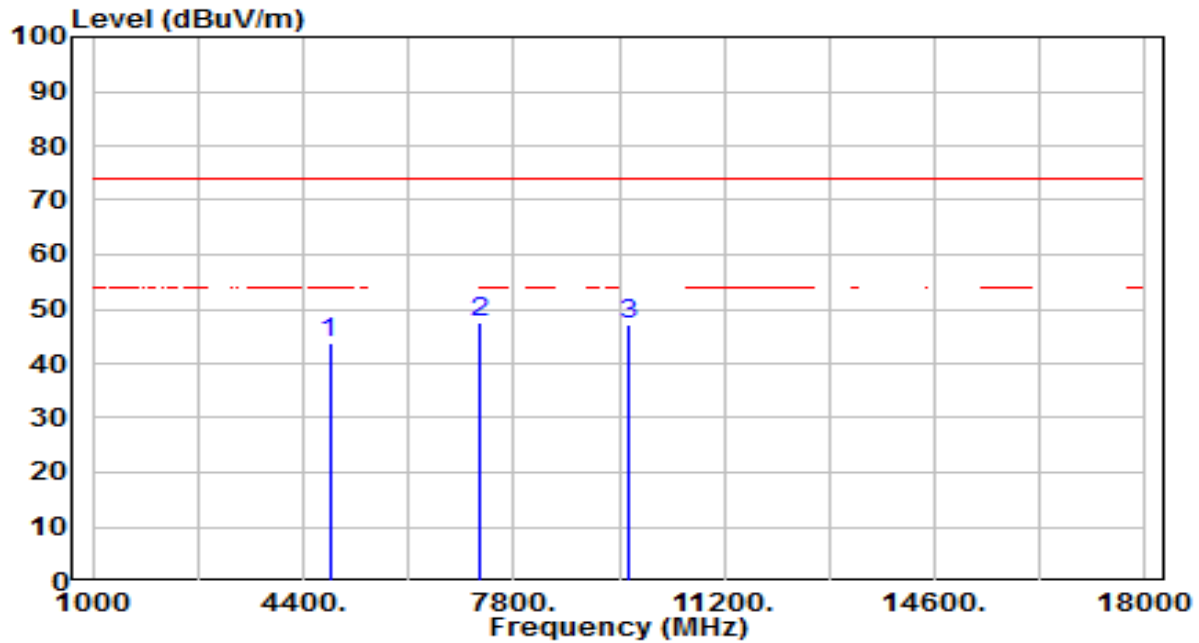


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	43.41	0.25	43.66	-30.34	74.00	300	25	Peak
2	*	7236.000	41.65	5.81	47.47	-26.53	74.00	300	0	Peak
3		9648.000	41.72	5.32	47.05	-26.95	74.00	300	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

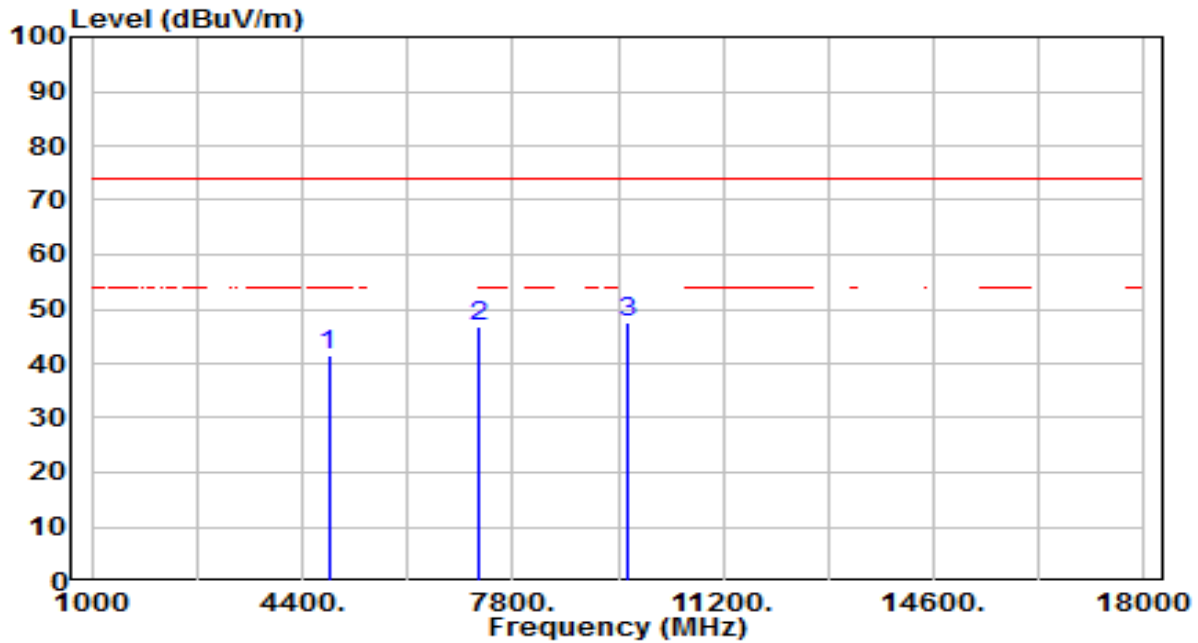


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.43	0.25	41.68	-32.32	74.00	300	360	Peak
2	7236.000	40.84	5.81	46.66	-27.34	74.00	300	5	Peak
3	* 9648.000	42.39	5.32	47.71	-26.29	74.00	300	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

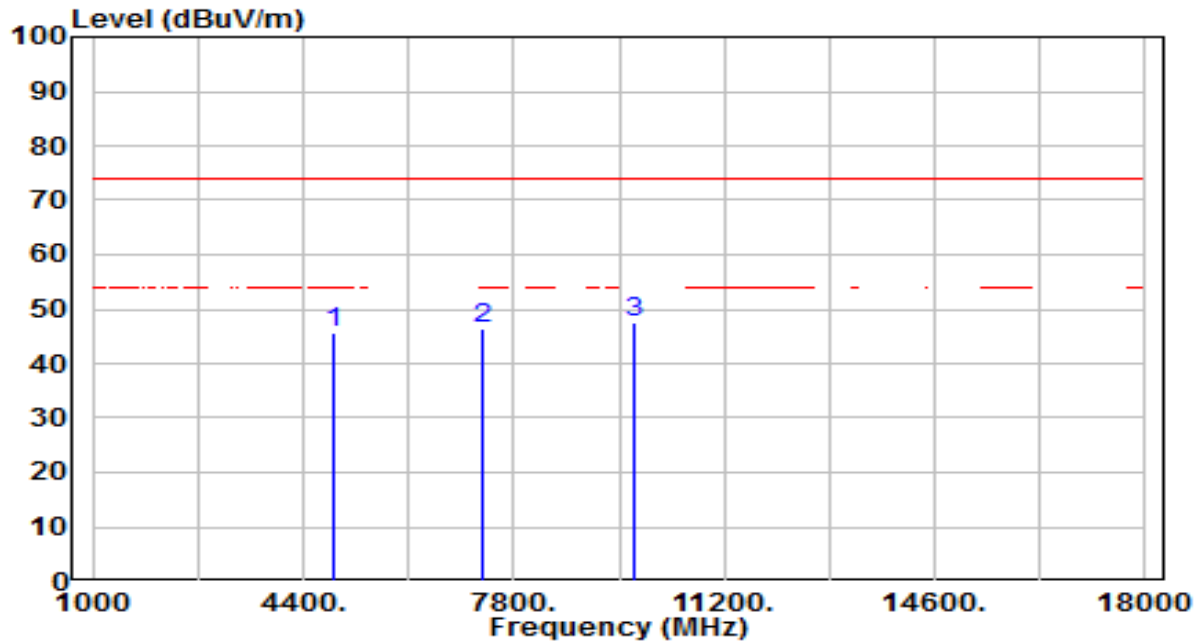


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	45.22	0.35	45.58	-28.42	74.00	100	335	Peak
2	7311.000	40.68	5.79	46.48	-27.52	74.00	100	25	Peak
3	* 9748.000	42.26	5.34	47.60	-26.40	74.00	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

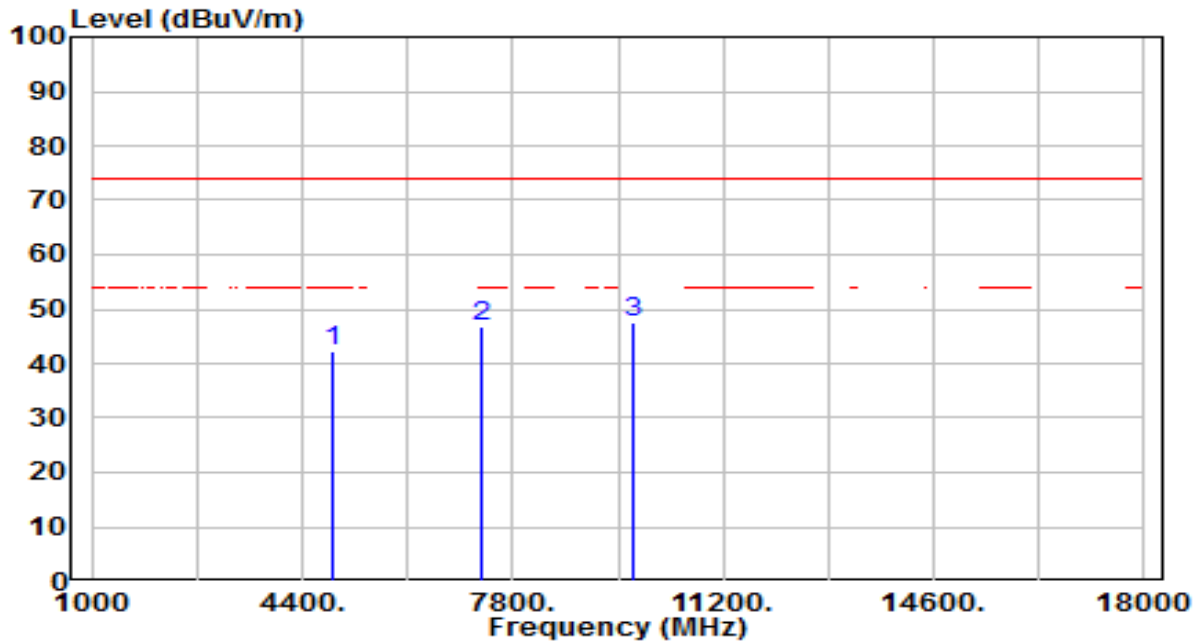


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.73	0.35	42.08	-31.92	74.00	100	85	Peak
2	7311.000	41.00	5.79	46.79	-27.21	74.00	100	295	Peak
3	* 9748.000	42.06	5.34	47.40	-26.60	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

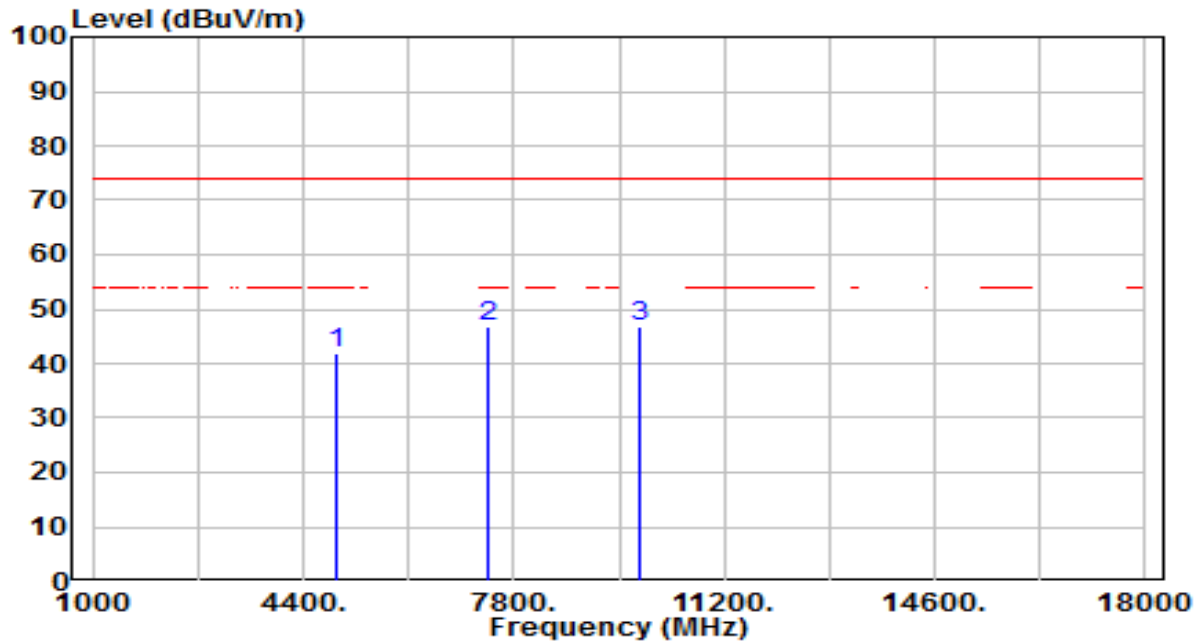


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.47	0.45	41.93	-32.07	74.00	100	360	Peak
2	7386.000	40.90	5.77	46.67	-27.33	74.00	100	165	Peak
3	* 9848.000	41.54	5.38	46.92	-27.08	74.00	100	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

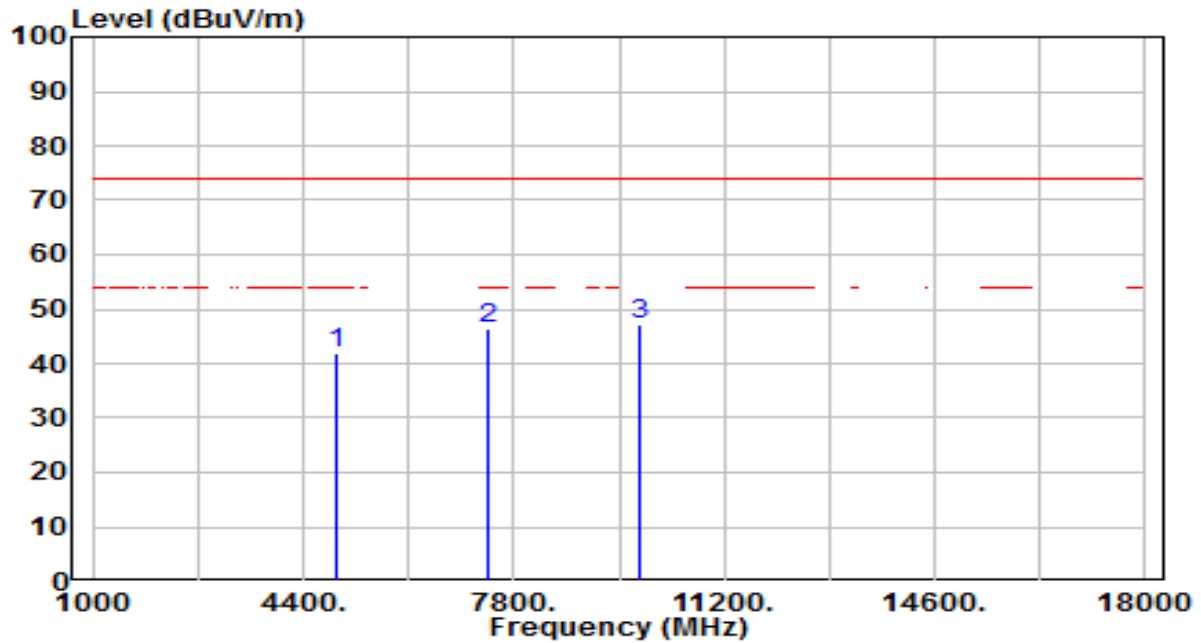


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.58	0.45	42.03	-31.97	74.00	100	345	Peak
2	7386.000	40.75	5.77	46.52	-27.48	74.00	100	0	Peak
3	* 9848.000	41.94	5.38	47.32	-26.68	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

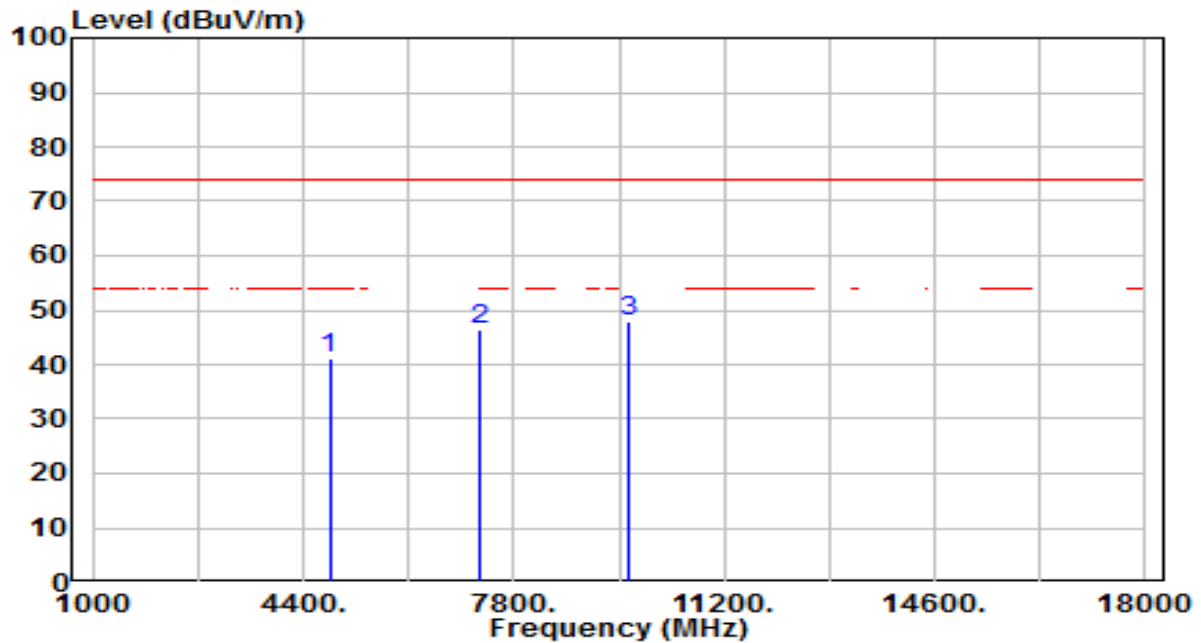


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.91	0.25	41.16	-32.84	74.00	100	315	Peak
2	7236.000	40.78	5.81	46.59	-27.41	74.00	100	15	Peak
3	* 9648.000	42.48	5.32	47.81	-26.19	74.00	100	50	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

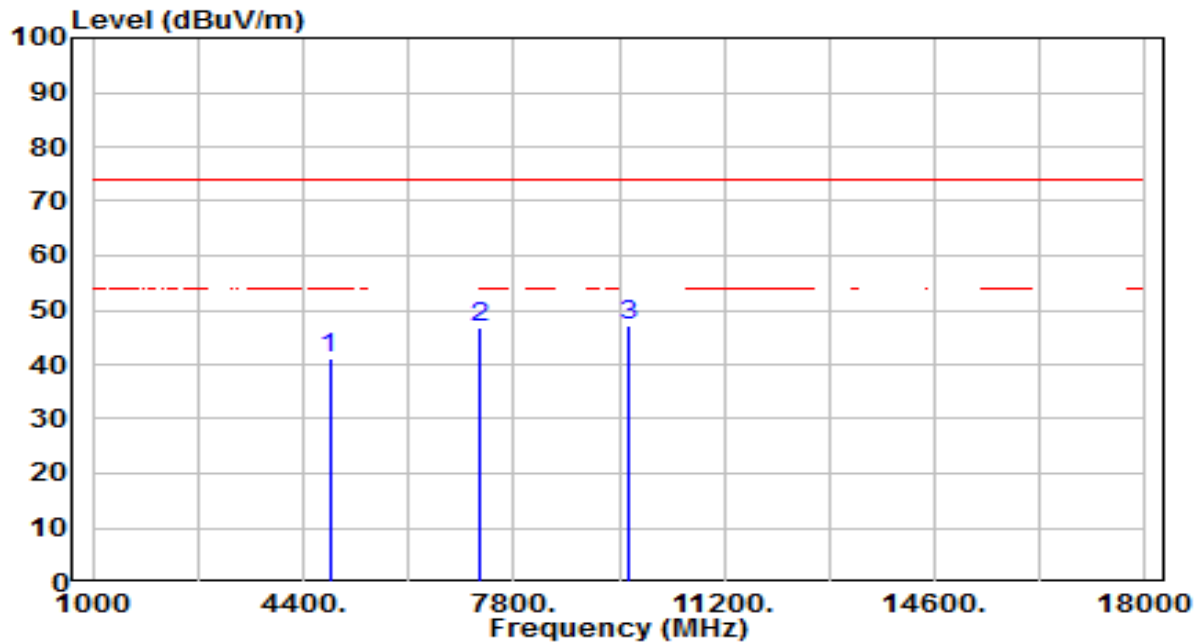


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.84	0.25	41.09	-32.91	74.00	100	65	Peak
2	7236.000	41.15	5.81	46.96	-27.04	74.00	100	20	Peak
3	* 9648.000	41.66	5.32	46.99	-27.01	74.00	100	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

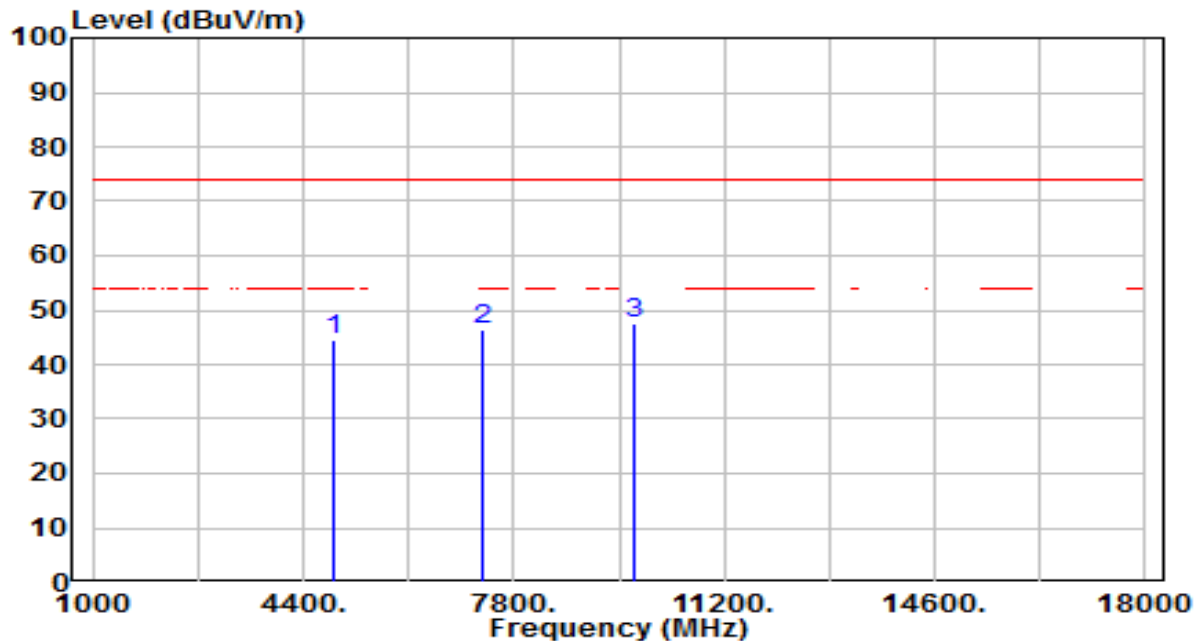


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.14	0.35	44.49	-29.51	74.00	100	40	Peak
2	7311.000	40.70	5.79	46.49	-27.51	74.00	100	195	Peak
3	* 9748.000	42.18	5.34	47.52	-26.48	74.00	100	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

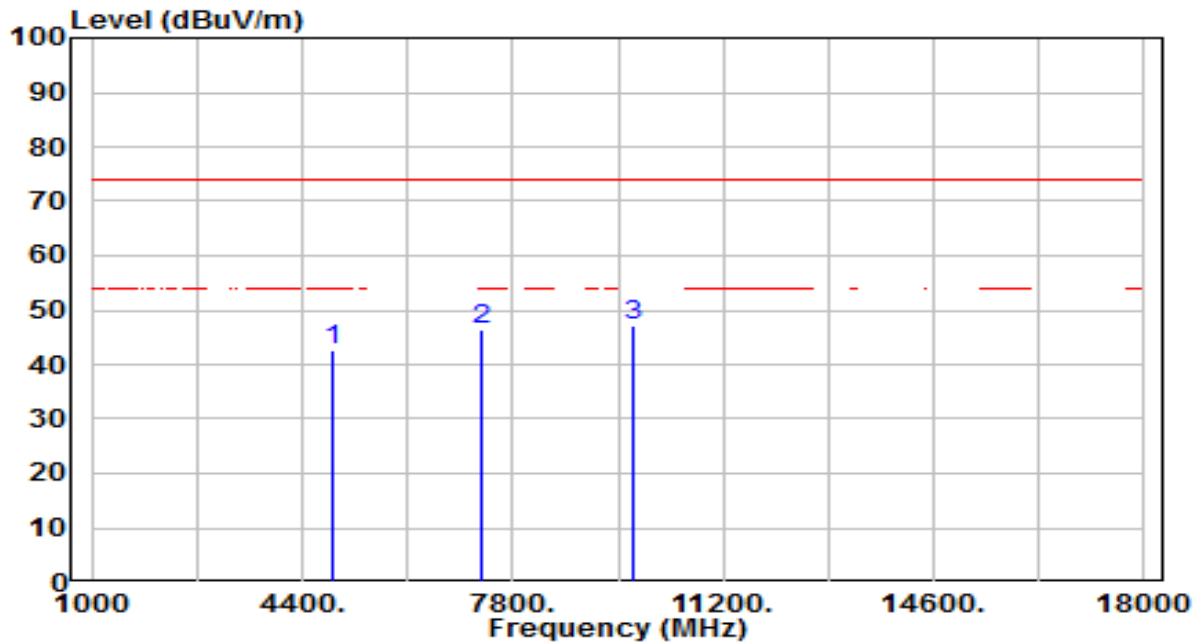


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.11	0.35	42.46	-31.54	74.00	100	35	Peak
2	7311.000	40.75	5.79	46.54	-27.46	74.00	100	60	Peak
3	* 9748.000	41.68	5.34	47.02	-26.98	74.00	100	25	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

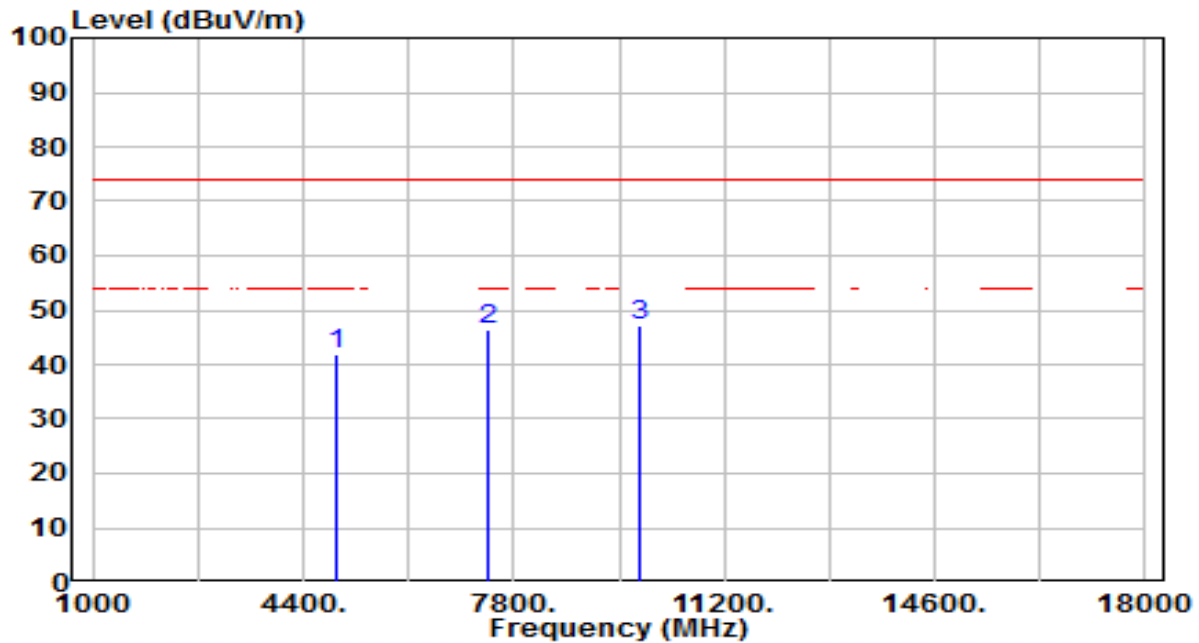


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.28	0.45	41.74	-32.26	74.00	100	275	Peak
2	7386.000	40.56	5.77	46.33	-27.67	74.00	100	300	Peak
3	* 9848.000	41.65	5.38	47.03	-26.97	74.00	100	25	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

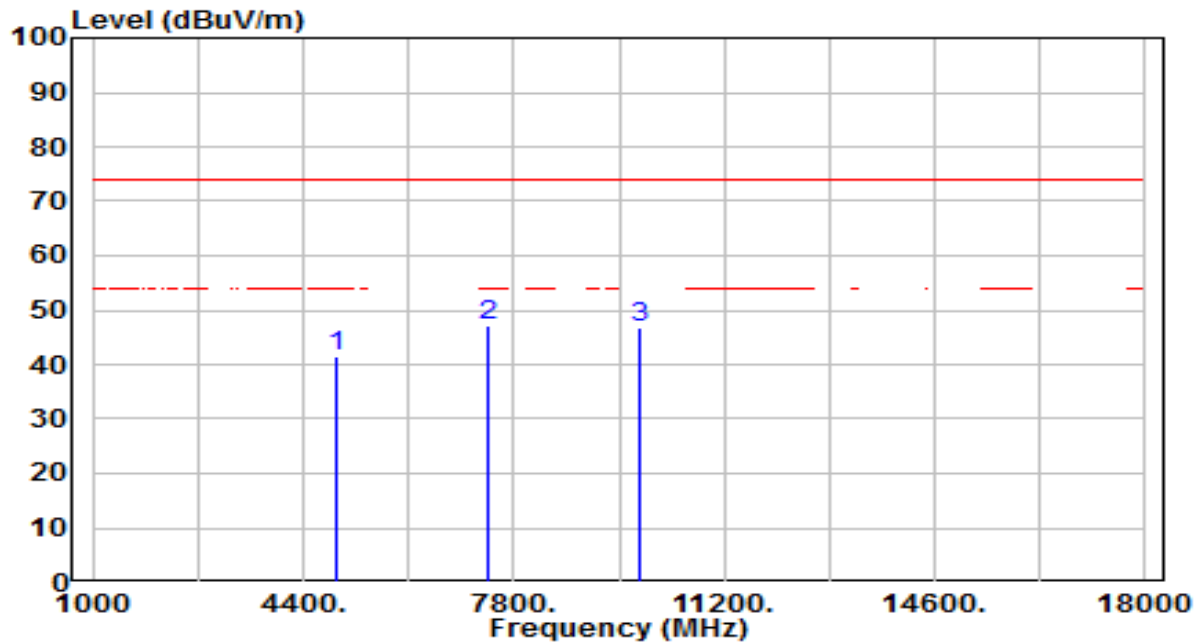


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.10	0.45	41.56	-32.44	74.00	100	305	Peak
2	* 7386.000	41.41	5.77	47.18	-26.82	74.00	100	305	Peak
3	9848.000	41.59	5.38	46.97	-27.03	74.00	100	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

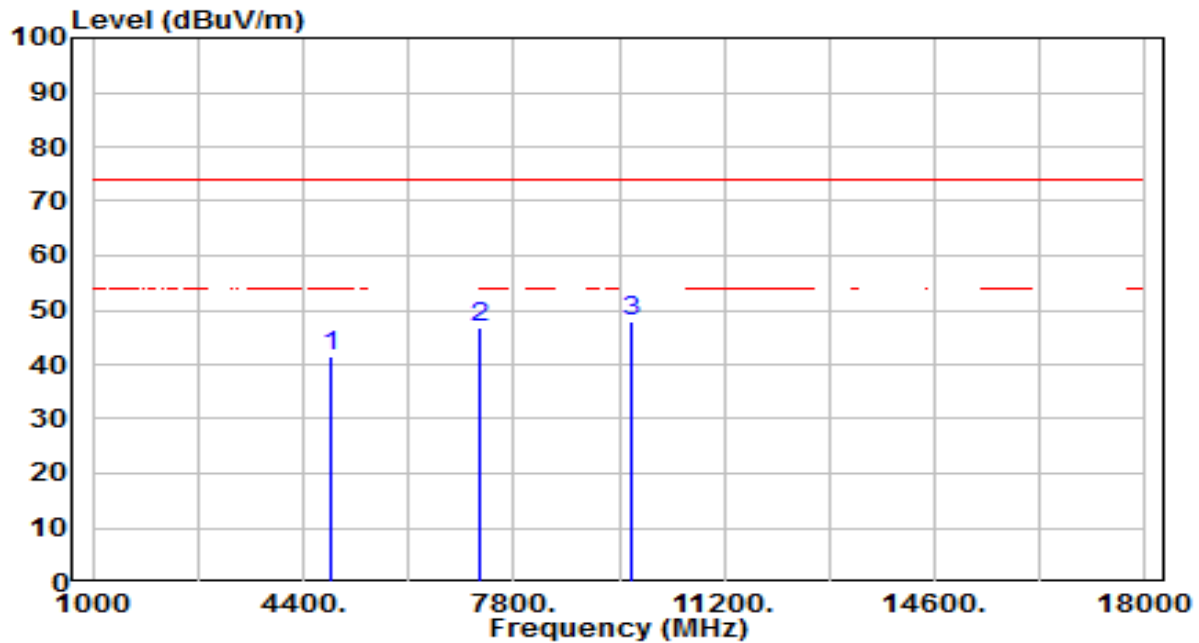


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	41.24	0.29	41.53	-32.47	74.00	100	290	Peak
2	7266.000	40.91	5.81	46.72	-27.28	74.00	100	235	Peak
3	* 9688.000	42.63	5.33	47.96	-26.04	74.00	100	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

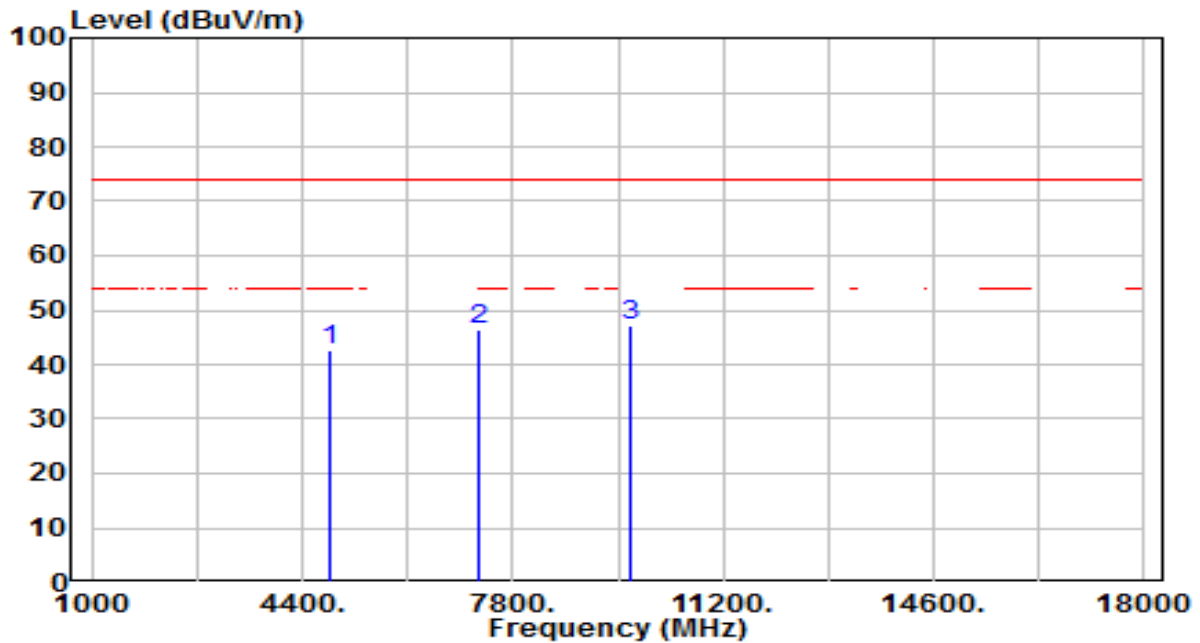


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	42.48	0.29	42.77	-31.23	74.00	100	155	Peak
2	7266.000	40.63	5.81	46.43	-27.57	74.00	100	160	Peak
3	* 9688.000	41.67	5.33	47.00	-27.00	74.00	100	235	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

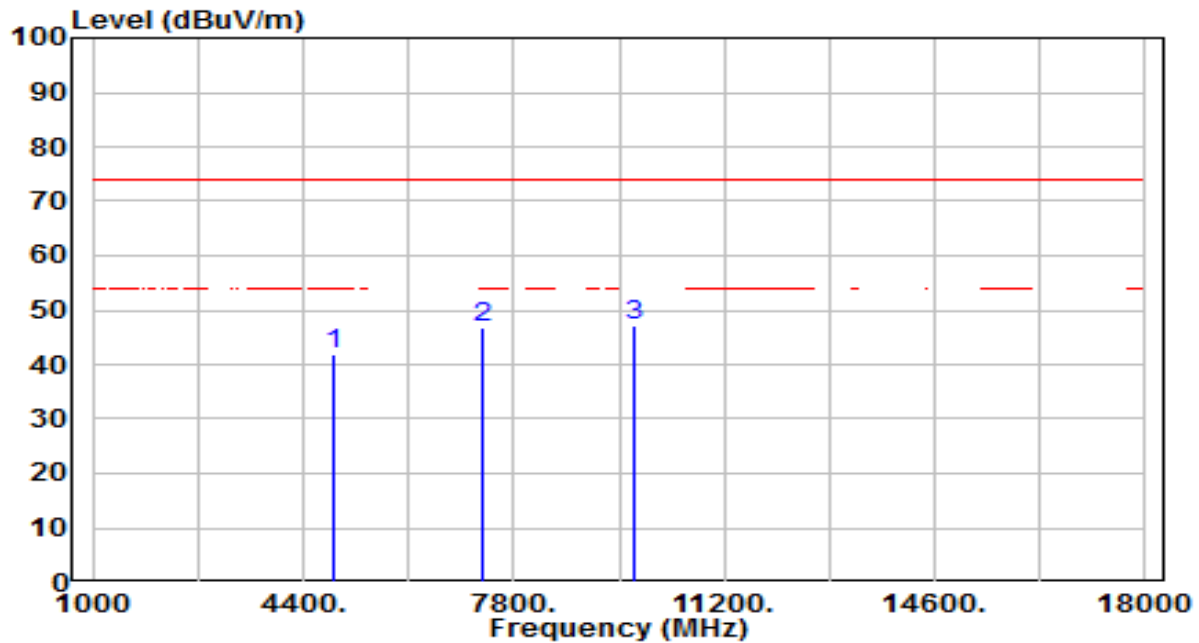


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.72	0.35	42.07	-31.93	74.00	100	35	Peak
2	7311.000	41.08	5.79	46.87	-27.13	74.00	100	340	Peak
3	* 9748.000	41.92	5.34	47.26	-26.74	74.00	100	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

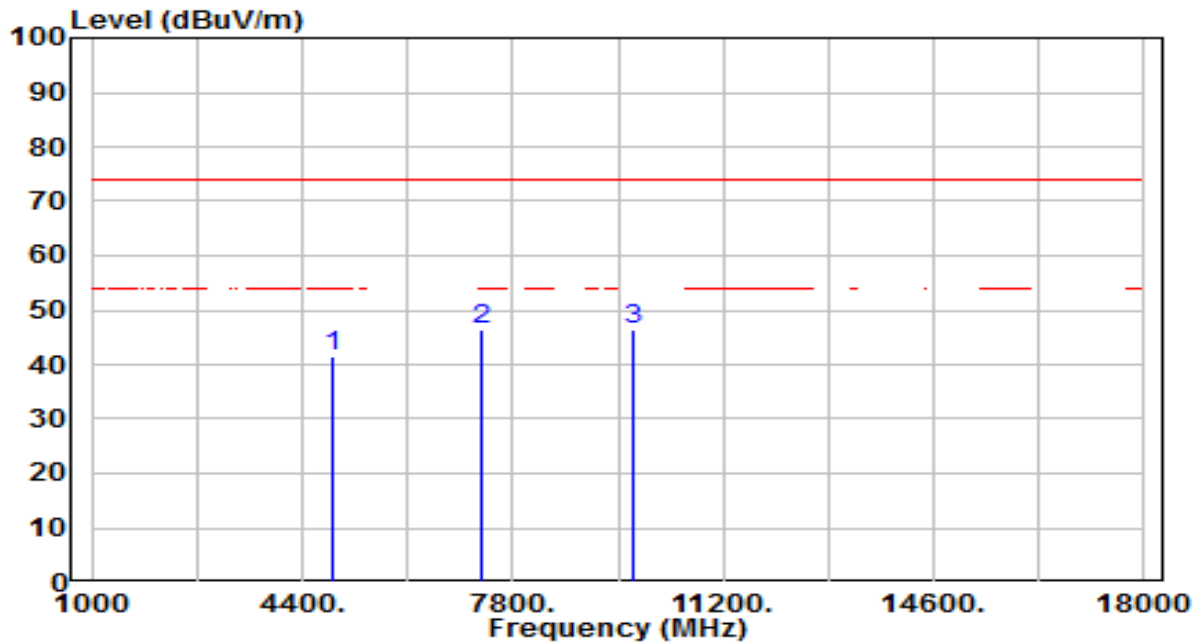


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.09	0.35	41.44	-32.56	74.00	100	125	Peak
2	7311.000	40.45	5.79	46.24	-27.76	74.00	100	120	Peak
3	* 9748.000	40.98	5.34	46.32	-27.68	74.00	100	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

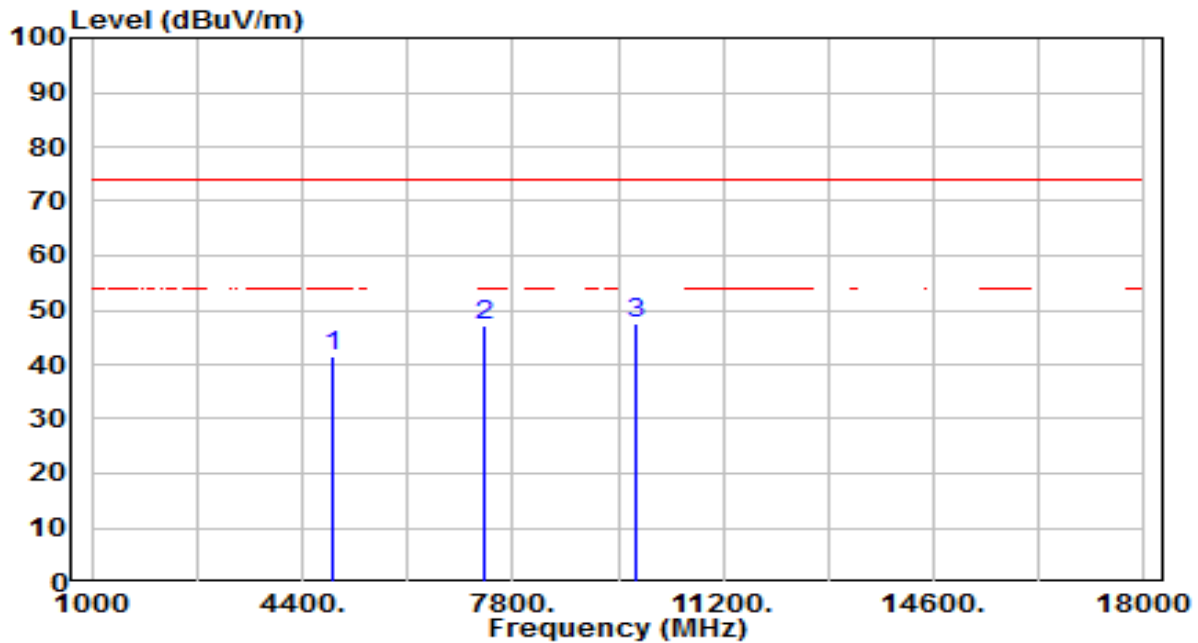


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.03	0.41	41.45	-32.55	74.00	100	15	Peak
2	7356.000	41.27	5.78	47.05	-26.95	74.00	100	15	Peak
3	* 9808.000	42.02	5.35	47.38	-26.62	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

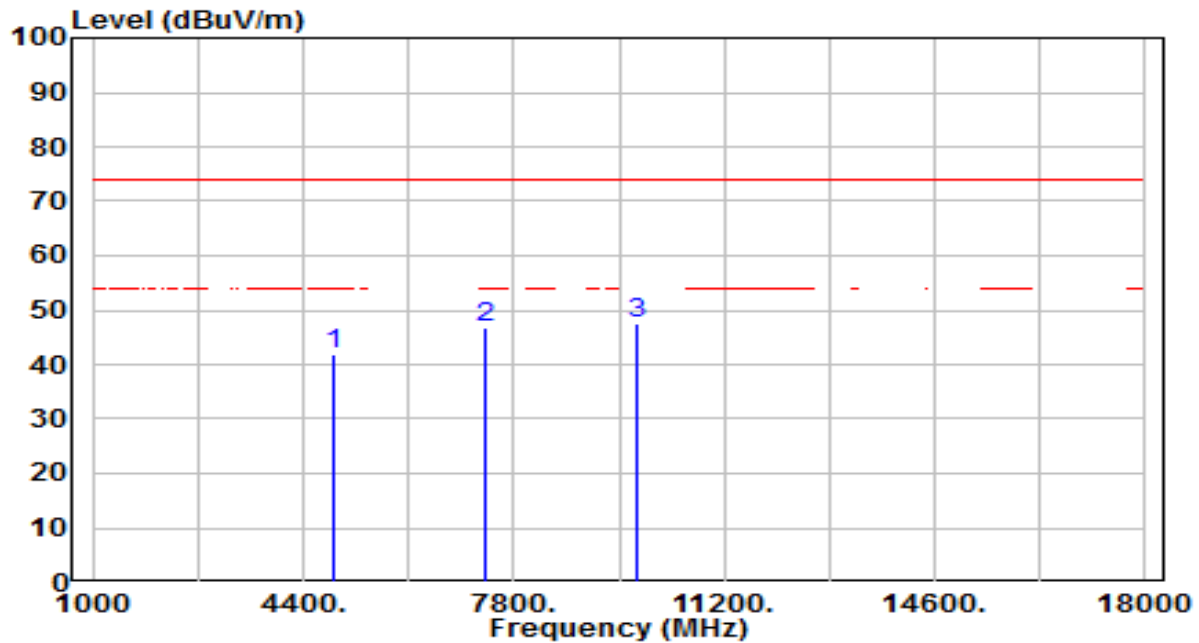


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.34	0.41	41.75	-32.25	74.00	100	115	Peak
2	7356.000	40.98	5.78	46.76	-27.24	74.00	100	290	Peak
3	* 9808.000	42.37	5.35	47.73	-26.27	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

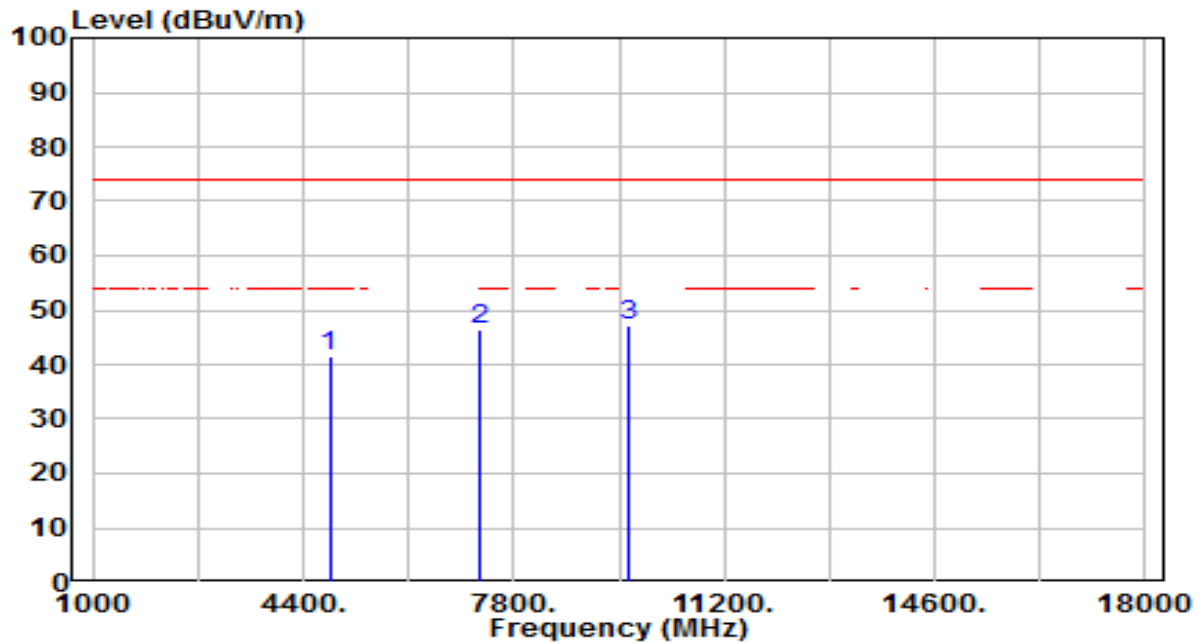


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.09	0.25	41.34	-32.66	74.00	100	90	Peak
2	7236.000	40.65	5.81	46.47	-27.53	74.00	100	275	Peak
3	* 9648.000	41.75	5.32	47.08	-26.92	74.00	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

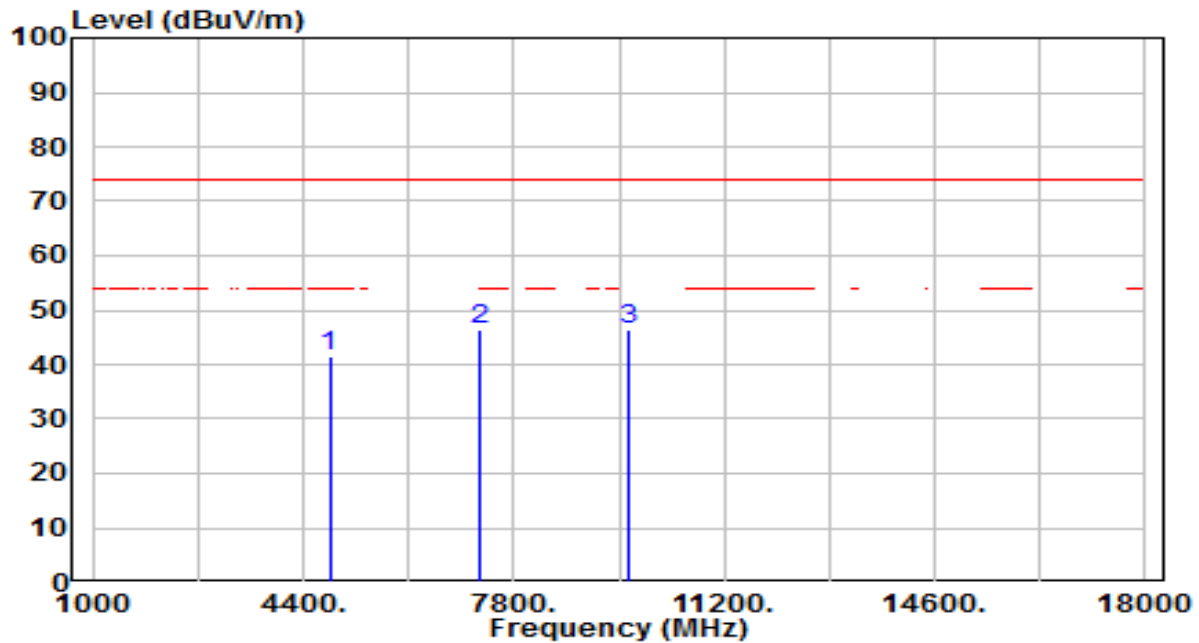


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.10	0.25	41.35	-32.65	74.00	100	235	Peak
2	7236.000	40.43	5.81	46.24	-27.76	74.00	100	25	Peak
3	* 9648.000	41.24	5.32	46.56	-27.44	74.00	100	270	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

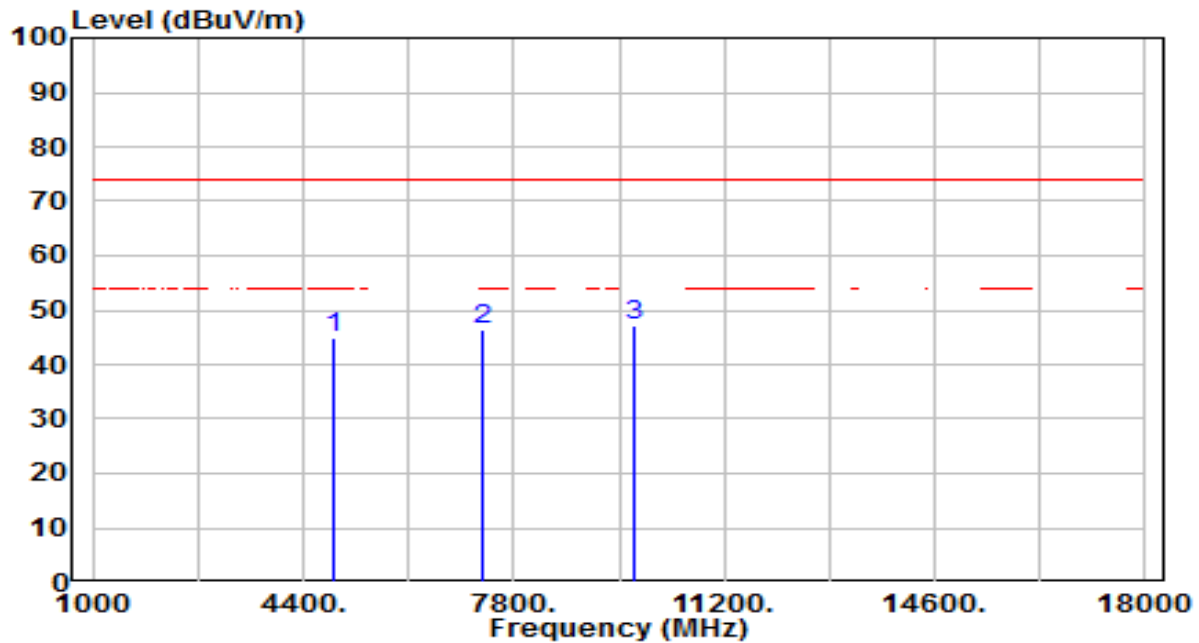


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.60	0.35	44.95	-29.05	74.00	100	45	Peak
2	7311.000	40.52	5.79	46.31	-27.69	74.00	100	170	Peak
3	* 9748.000	41.75	5.34	47.09	-26.91	74.00	100	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

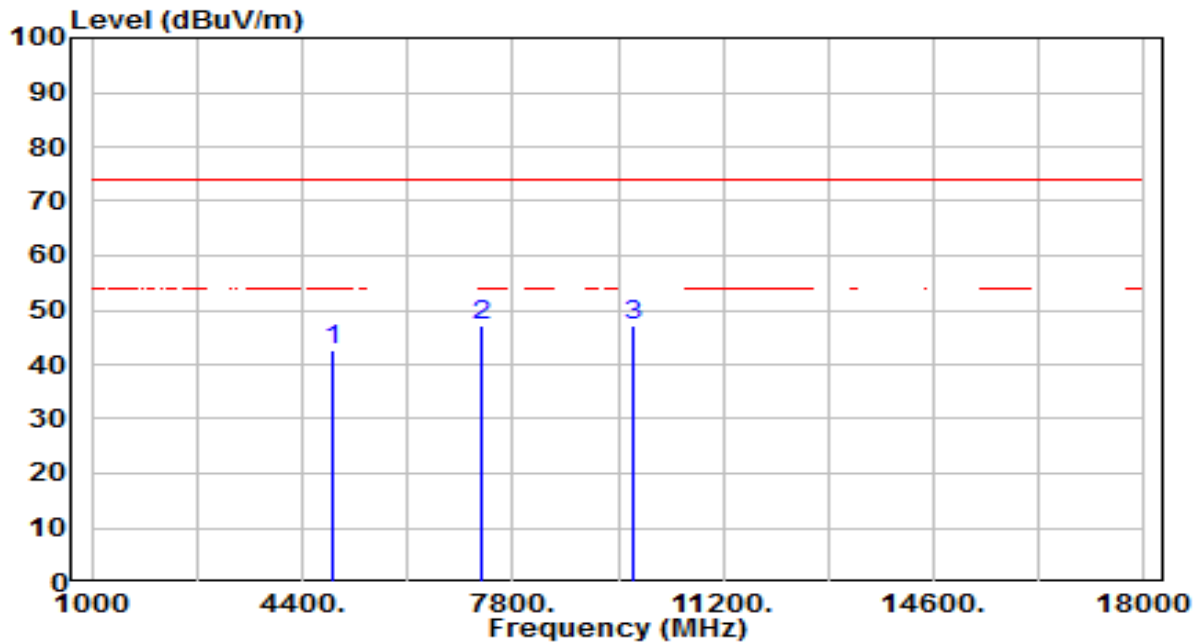


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.31	0.35	42.66	-31.34	74.00	100	55	Peak
2	* 7311.000	41.33	5.79	47.12	-26.88	74.00	100	180	Peak
3	9748.000	41.69	5.34	47.03	-26.97	74.00	100	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

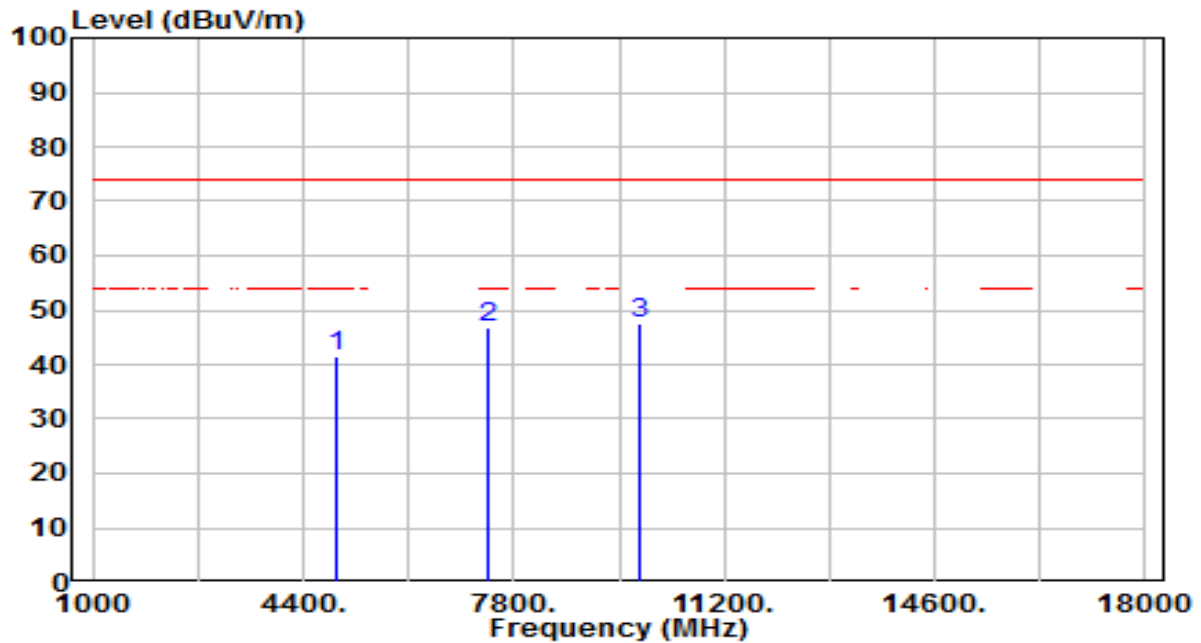


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.20	0.45	41.65	-32.35	74.00	100	300	Peak
2	7386.000	41.00	5.77	46.77	-27.23	74.00	100	300	Peak
3	* 9848.000	42.23	5.38	47.61	-26.39	74.00	100	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

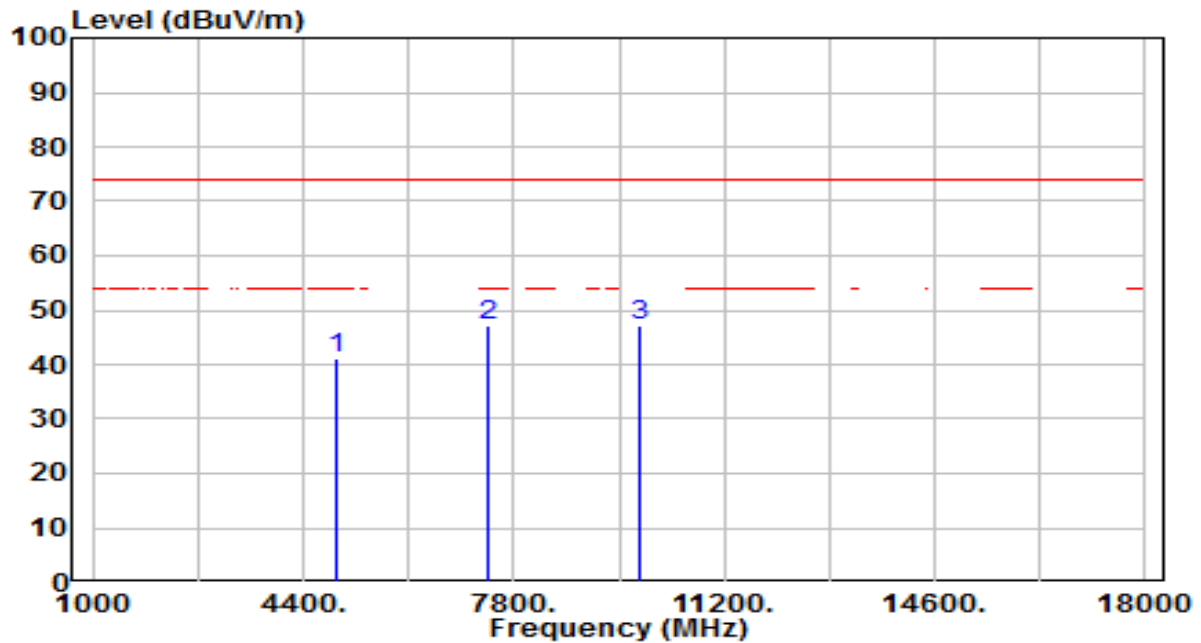


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	40.71	0.45	41.16	-32.84	74.00	100	50	Peak
2	*	7386.000	41.46	5.77	47.23	-26.77	74.00	100	15	Peak
3		9848.000	41.79	5.38	47.17	-26.83	74.00	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

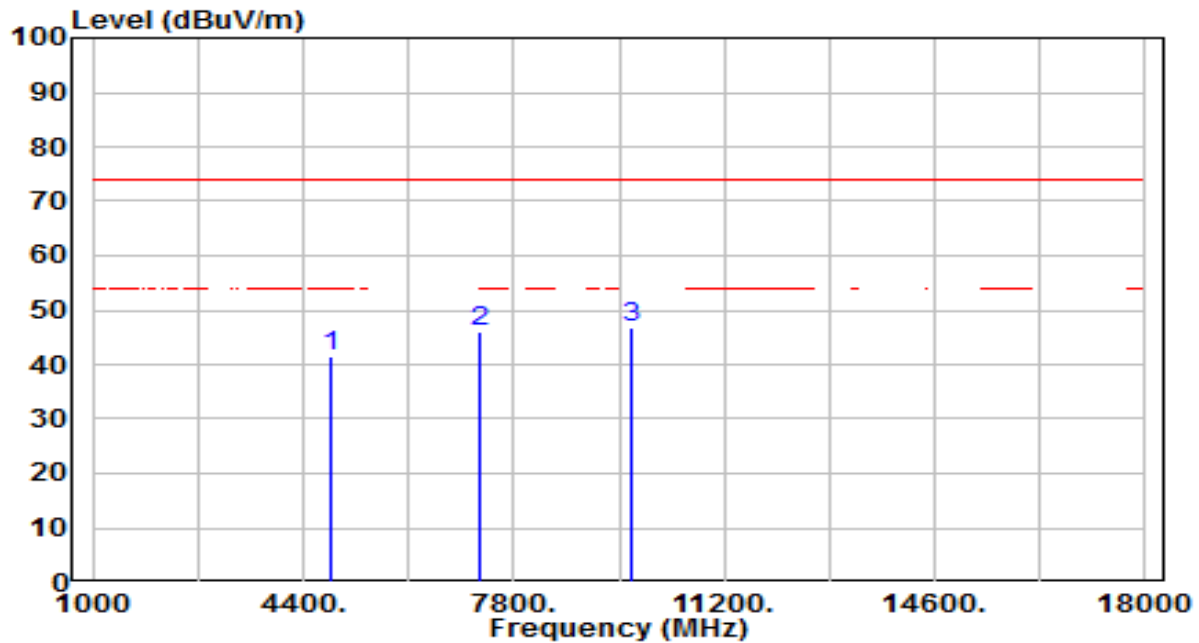


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	41.19	0.29	41.48	-32.52	74.00	100	30	Peak
2	7266.000	40.19	5.81	46.00	-28.00	74.00	100	30	Peak
3	* 9688.000	41.63	5.33	46.96	-27.04	74.00	100	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

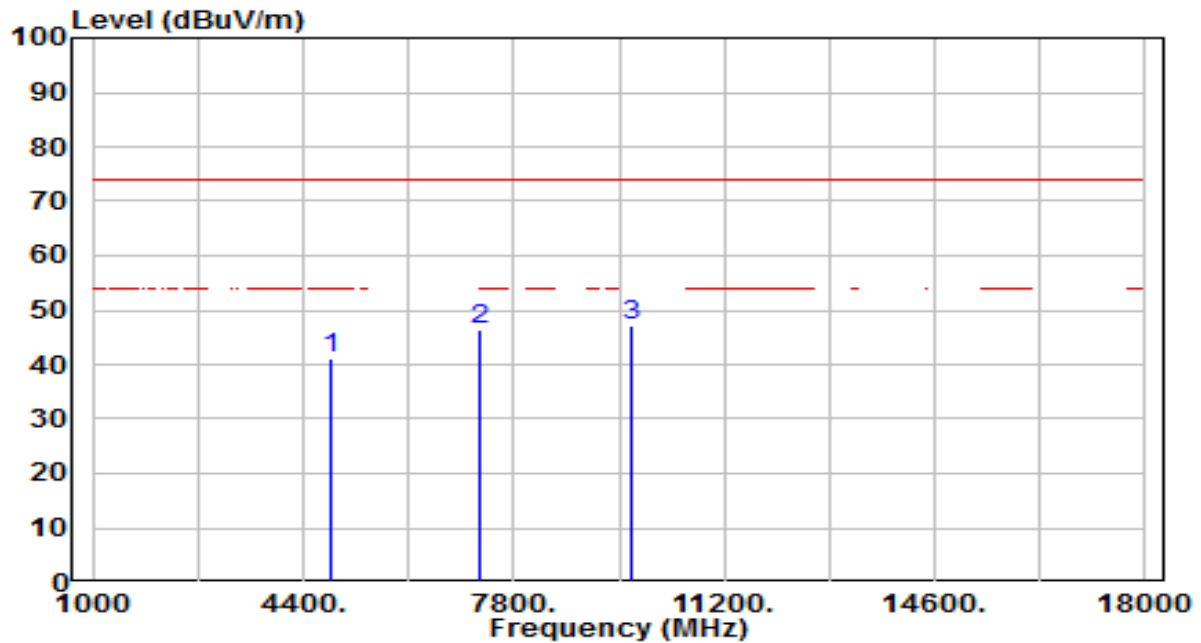


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.86	0.29	41.15	-32.85	74.00	100	330	Peak
2	7266.000	40.49	5.81	46.30	-27.70	74.00	100	105	Peak
3	* 9688.000	41.86	5.33	47.19	-26.81	74.00	100	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

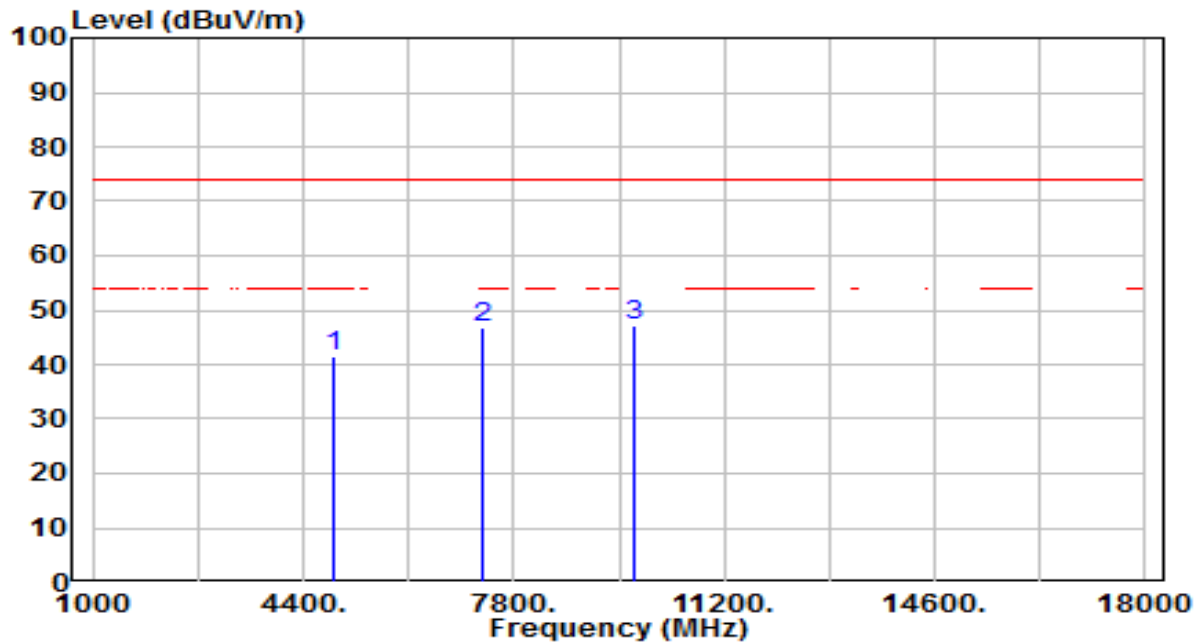


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.09	0.35	41.44	-32.56	74.00	100	220	Peak
2	7311.000	40.92	5.79	46.71	-27.29	74.00	100	265	Peak
3	* 9748.000	41.92	5.34	47.26	-26.74	74.00	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

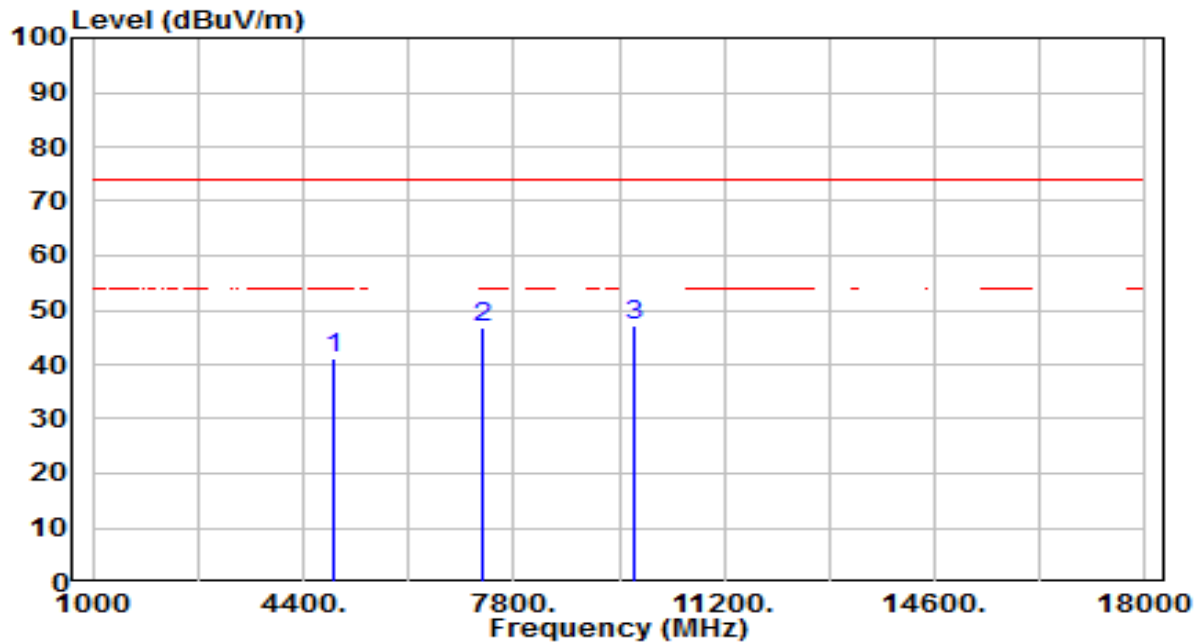


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.81	0.35	41.17	-32.83	74.00	100	240	Peak
2	7311.000	41.07	5.79	46.86	-27.14	74.00	100	50	Peak
3	* 9748.000	41.85	5.34	47.19	-26.81	74.00	100	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

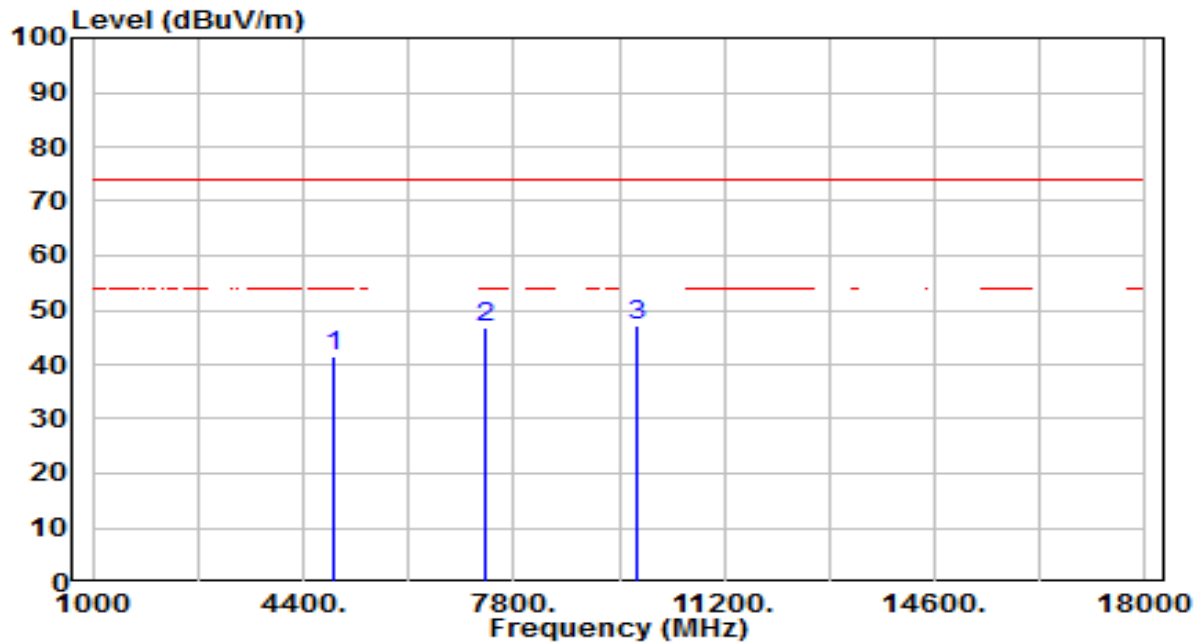


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.97	0.41	41.38	-32.62	74.00	100	175	Peak
2	7356.000	41.18	5.78	46.97	-27.03	74.00	100	30	Peak
3	* 9808.000	41.82	5.35	47.18	-26.82	74.00	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

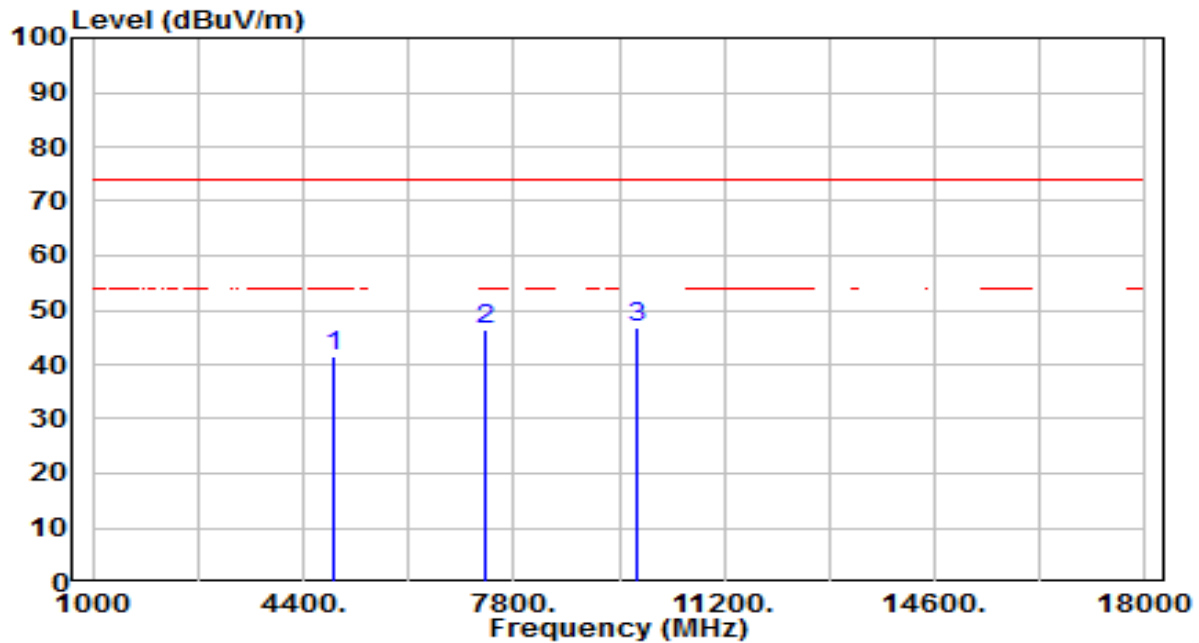

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.13	0.41	41.55	-32.45	74.00	100	150	Peak
2	7356.000	40.77	5.78	46.55	-27.45	74.00	100	190	Peak
3	* 9808.000	41.62	5.35	46.98	-27.02	74.00	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

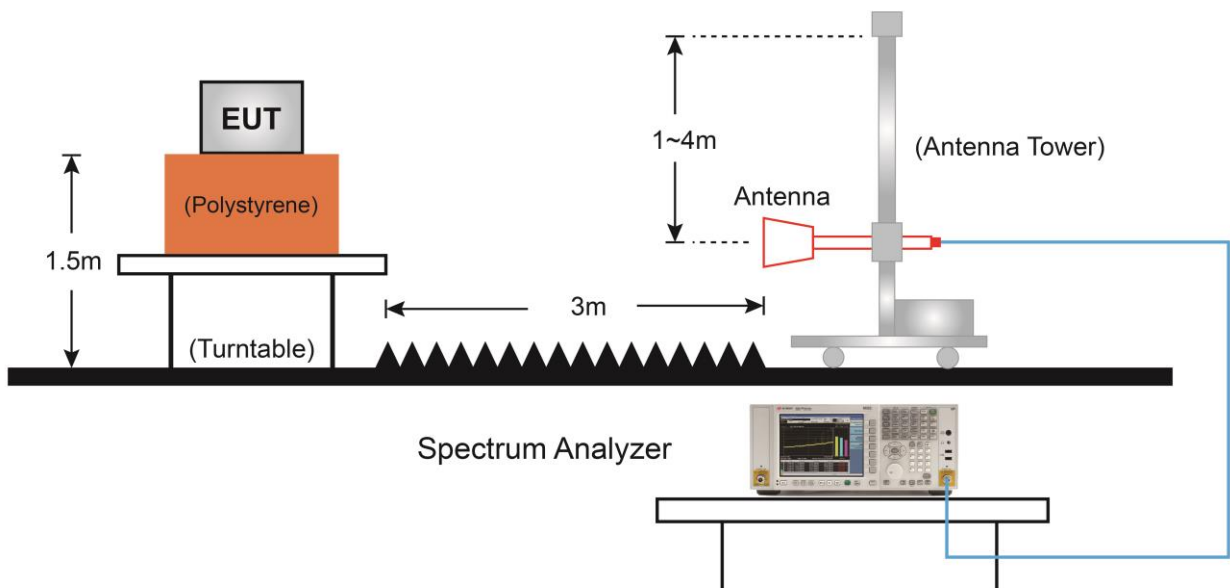7.7.4.Test Setup

7.7.5.Test Result

Horizontal Antenna Data

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

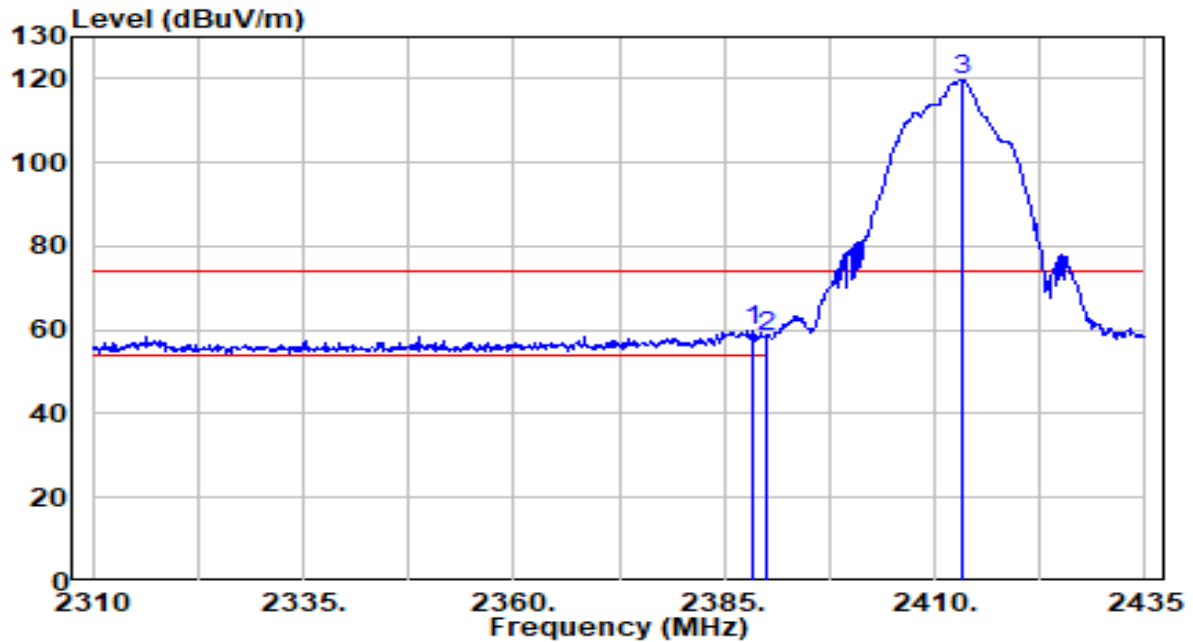


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.500	29.31	30.61	59.92	-14.08	74.00	225	10	Peak
2		2390.000	27.65	30.61	58.27	-15.73	74.00	225	10	Peak
3		2413.125	89.17	30.67	119.84	N/A	N/A	225	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

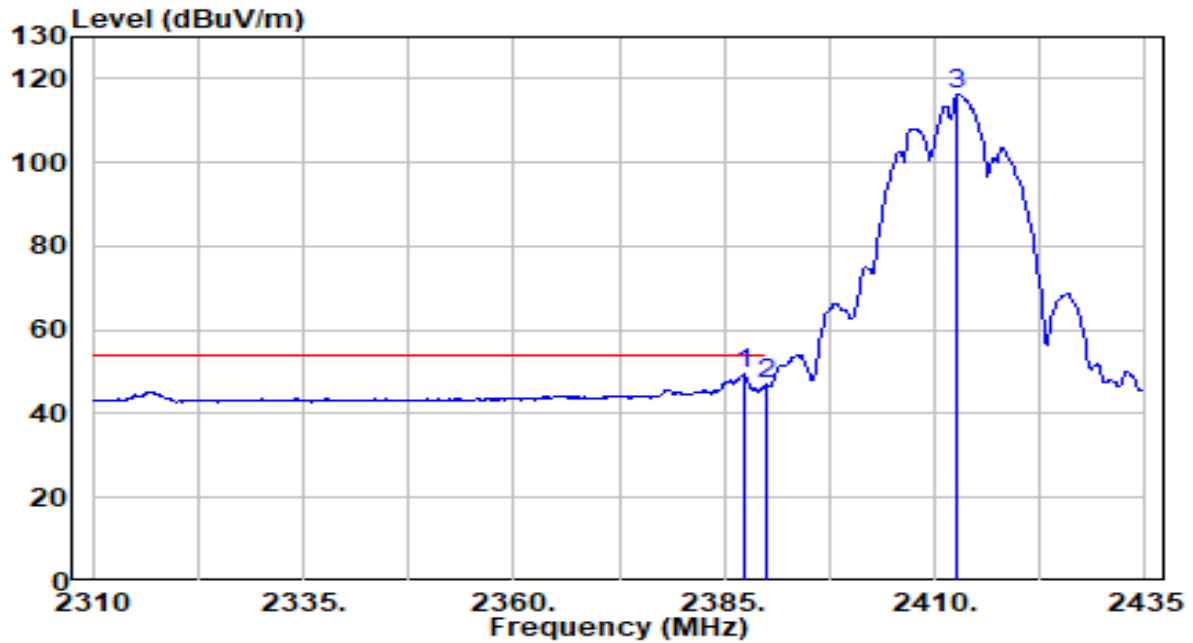


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.250	18.70	30.61	49.31	-4.69	54.00	225	10	Average
2		2390.000	16.42	30.61	47.03	-6.97	54.00	225	10	Average
3		2412.750	85.81	30.67	116.48	N/A	N/A	225	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

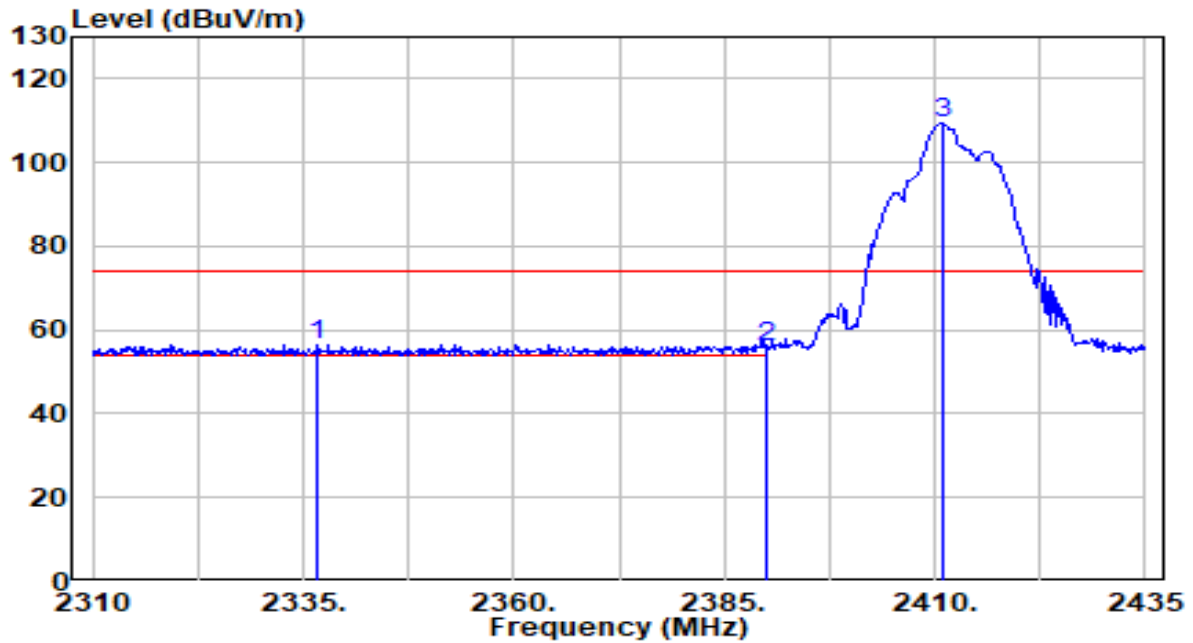


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2336.750	26.02	30.54	56.56	-17.44	74.00	120	95	Peak
2		2390.000	25.45	30.61	56.06	-17.94	74.00	120	95	Peak
3		2410.875	78.76	30.67	109.43	N/A	N/A	120	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

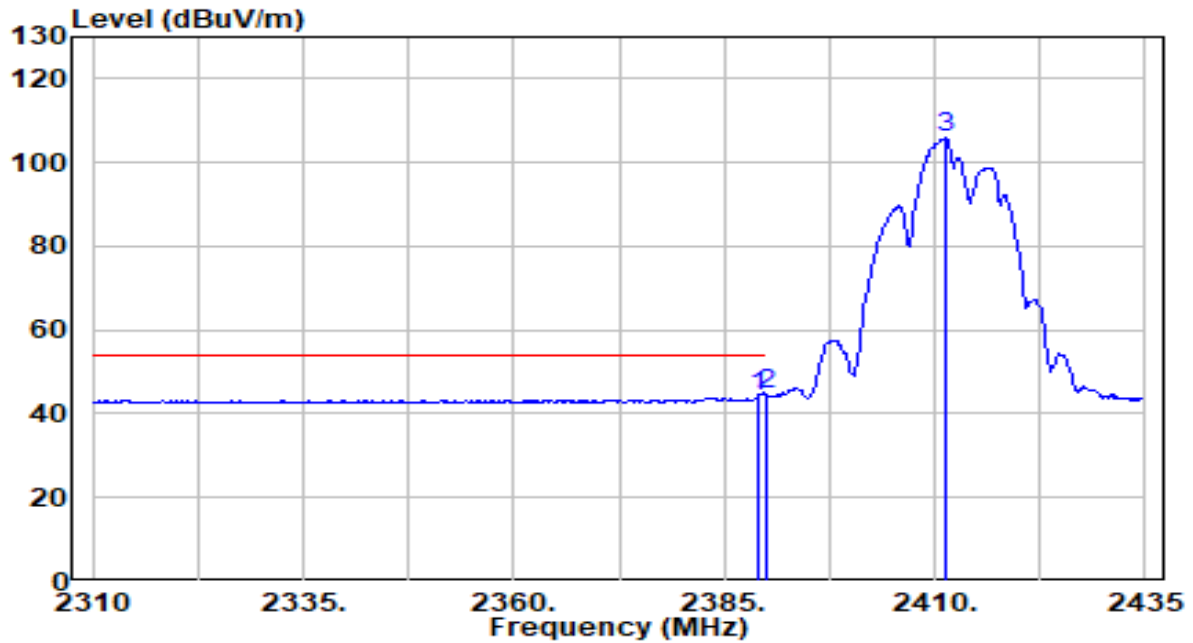


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	13.47	30.61	44.09	-9.91	54.00	120	95	Average
2	*	2390.000	14.05	30.61	44.66	-9.34	54.00	120	95	Average
3		2411.250	75.13	30.67	105.80	N/A	N/A	120	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

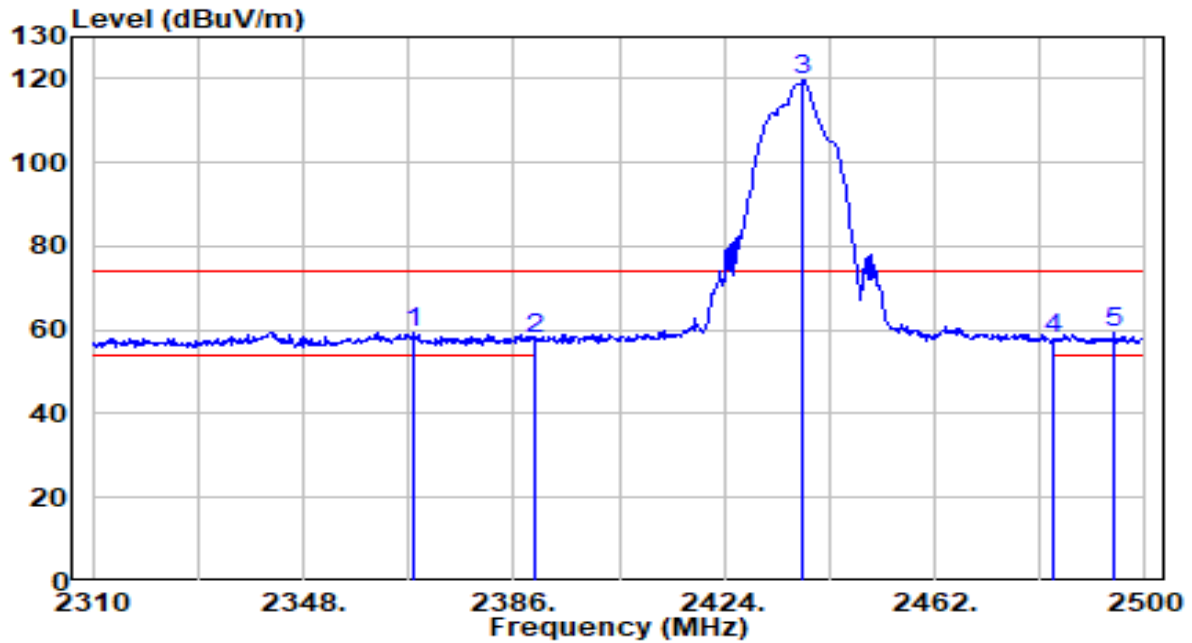


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2367.950	28.81	30.58	59.39	-14.61	74.00	100	10	Peak
2		2390.000	27.44	30.61	58.06	-15.94	74.00	100	10	Peak
3		2438.250	88.93	30.76	119.69	N/A	N/A	100	10	Peak
4		2483.500	26.76	30.91	57.67	-16.33	74.00	100	10	Peak
5		2494.300	28.18	30.95	59.13	-14.87	74.00	100	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

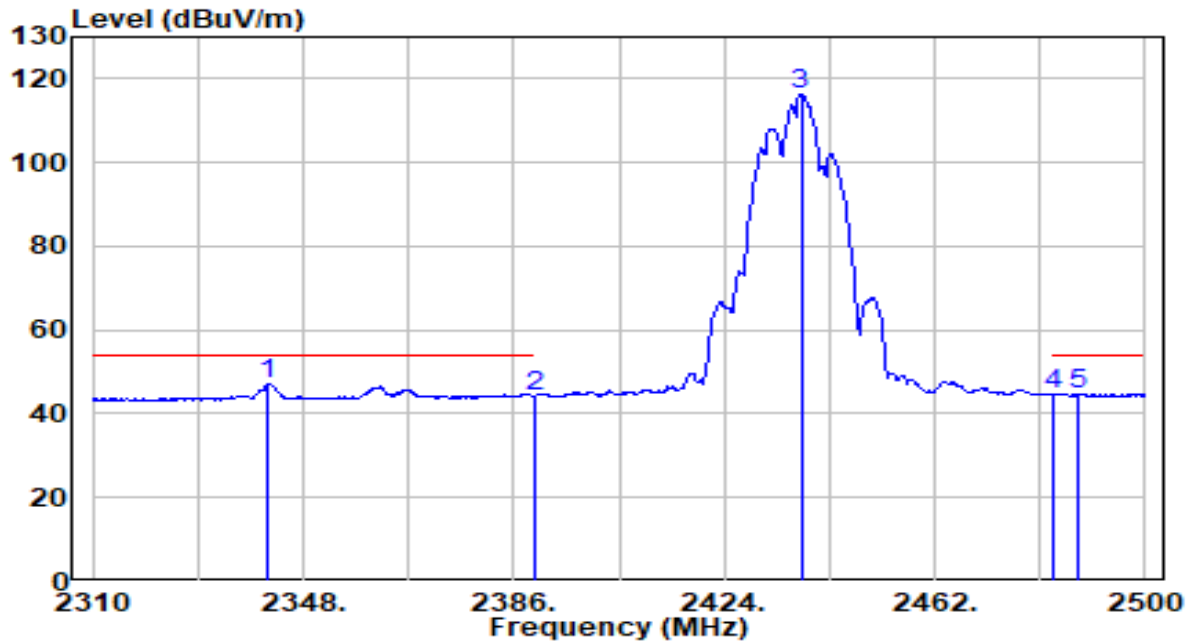


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.730	16.56	30.55	47.11	-6.89	54.00	100	10	Average
2		2390.000	13.78	30.61	44.39	-9.61	54.00	100	10	Average
3		2437.870	85.63	30.76	116.38	N/A	N/A	100	10	Average
4		2483.500	13.76	30.91	44.67	-9.33	54.00	100	10	Average
5		2487.650	13.79	30.93	44.71	-9.29	54.00	100	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

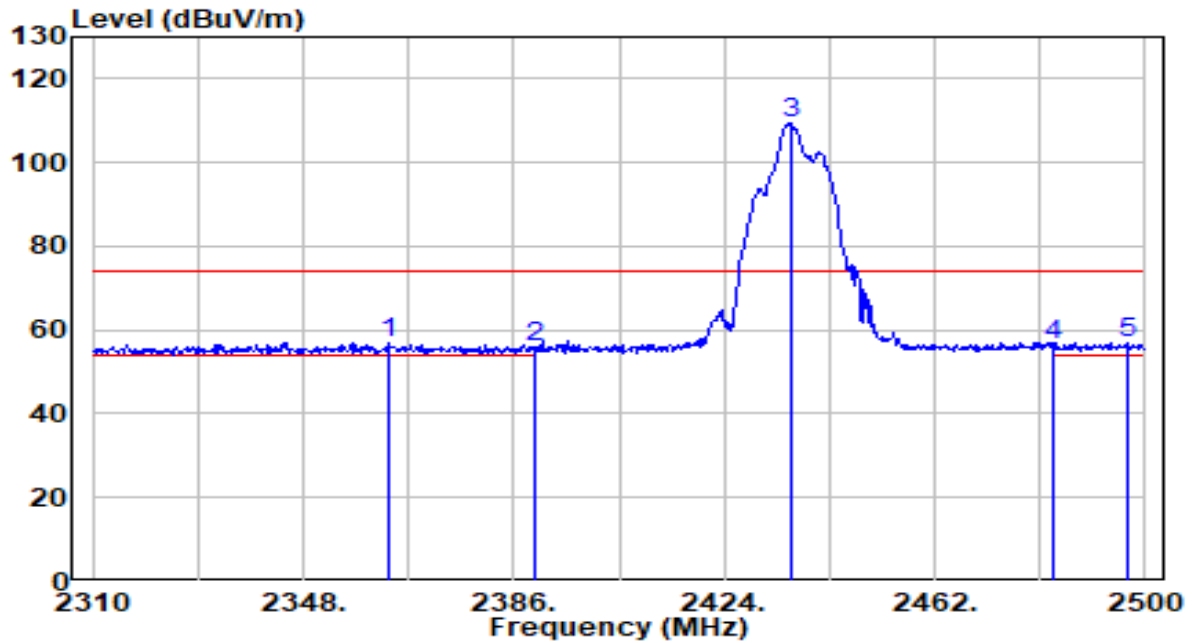


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2363.580	26.37	30.58	56.95	-17.05	74.00	110	95	Peak
2	2390.000	25.09	30.61	55.71	-18.29	74.00	110	95	Peak
3	2435.970	78.64	30.75	109.39	N/A	N/A	110	95	Peak
4	2483.500	25.53	30.91	56.44	-17.56	74.00	110	95	Peak
5	* 2496.770	26.13	30.96	57.09	-16.91	74.00	110	95	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

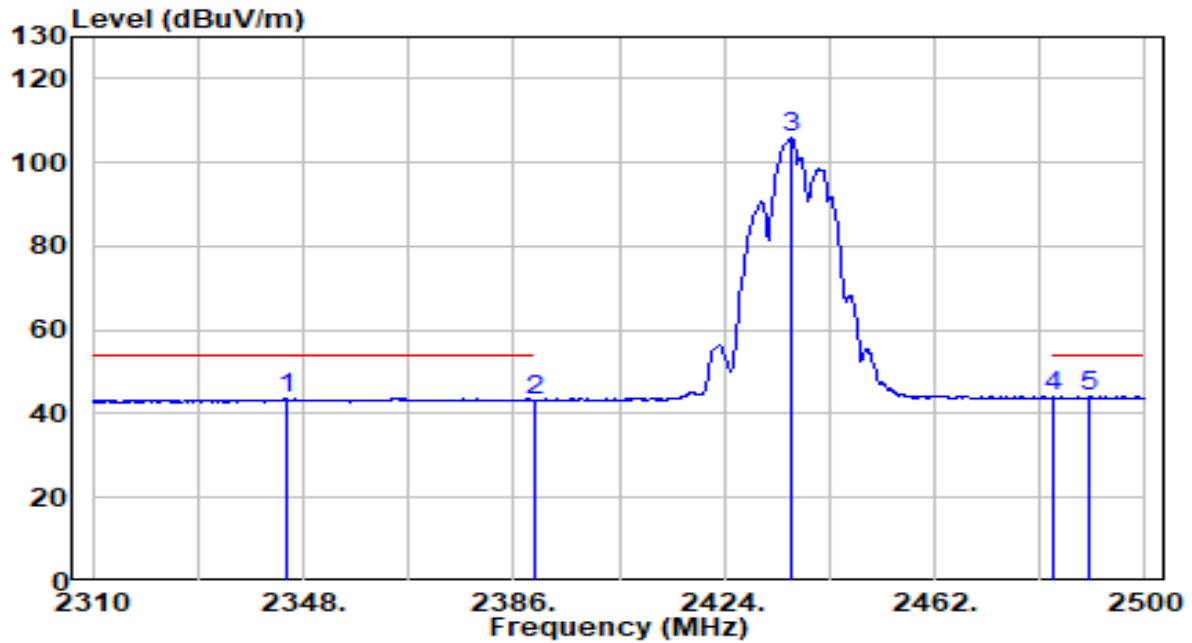


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2344.960	13.12	30.55	43.67	-10.33	54.00	110	95	Average
2	2390.000	12.45	30.61	43.06	-10.94	54.00	110	95	Average
3	2436.350	75.09	30.75	105.85	N/A	N/A	110	95	Average
4	2483.500	13.02	30.91	43.93	-10.07	54.00	110	95	Average
5	* 2489.930	13.11	30.94	44.05	-9.95	54.00	110	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

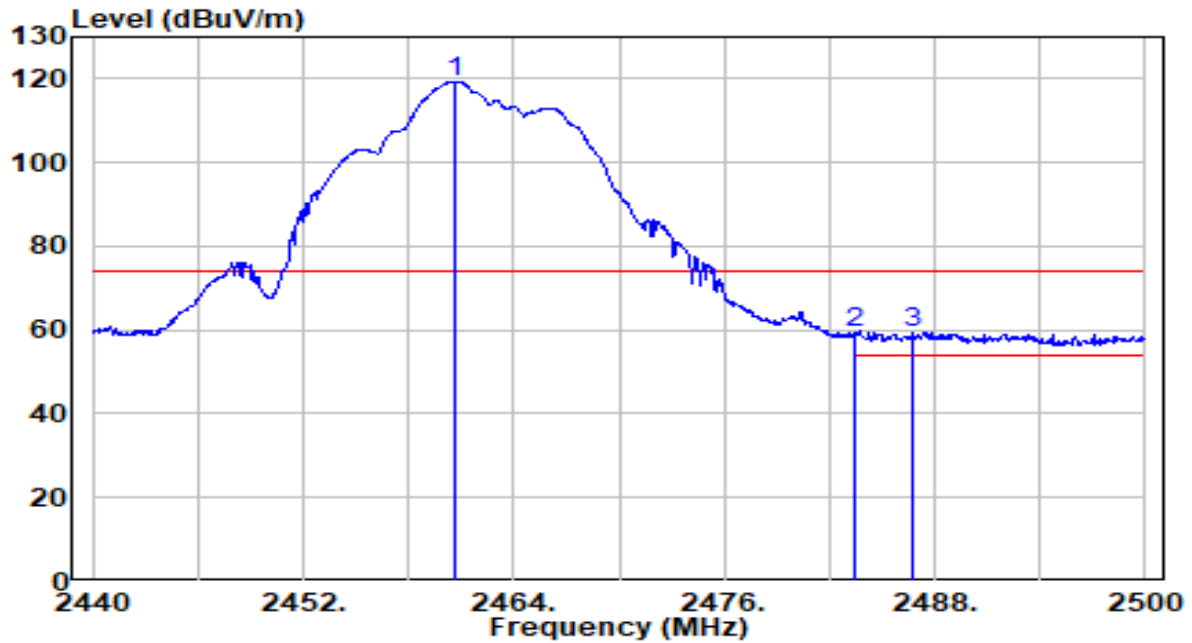


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	88.46	30.84	119.29	N/A	N/A	155	345	Peak
2	2483.500	28.30	30.91	59.22	-14.78	74.00	155	345	Peak
3	* 2486.800	28.52	30.92	59.45	-14.55	74.00	155	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

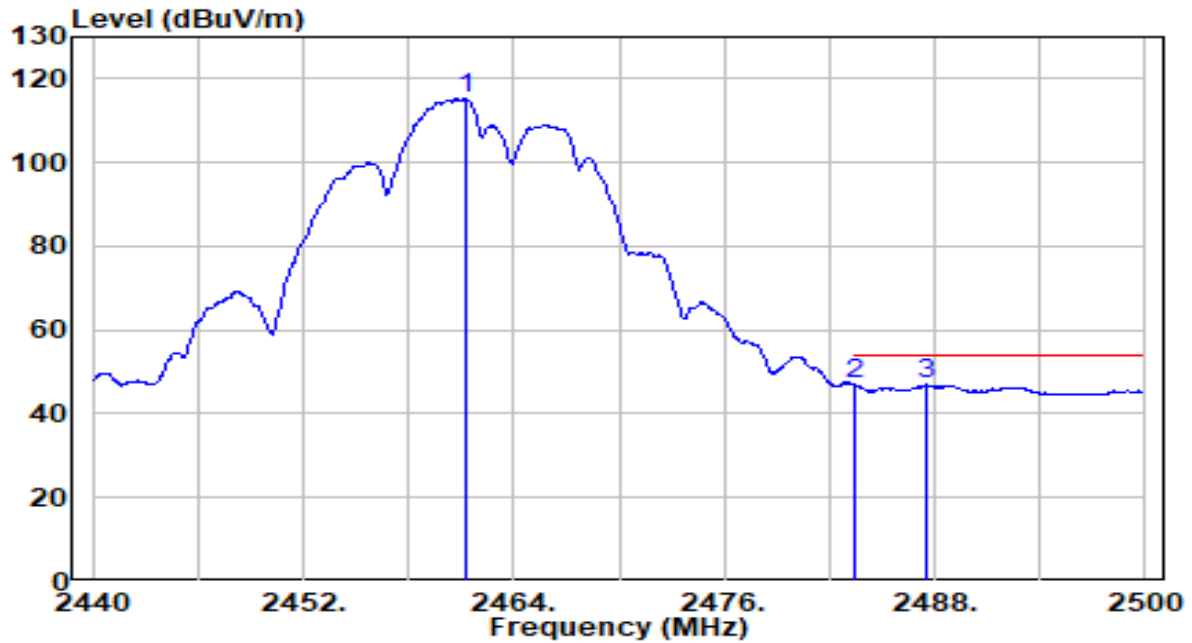


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.240	84.28	30.84	115.11	N/A	N/A	155	345	Average
2	*	2483.500	15.98	30.91	46.89	-7.11	54.00	155	345	Average
3		2487.520	15.97	30.93	46.89	-7.11	54.00	155	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

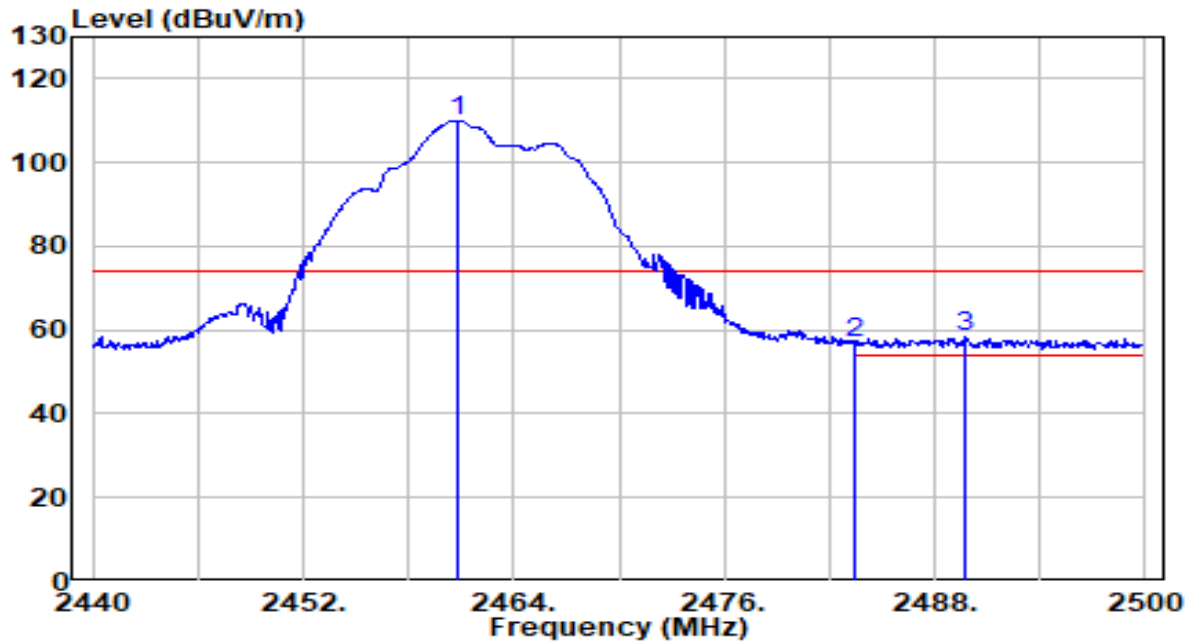


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	79.28	30.84	110.11	N/A	N/A	230	295	Peak
2	2483.500	25.97	30.91	56.89	-17.11	74.00	230	295	Peak
3	* 2489.800	27.21	30.94	58.14	-15.86	74.00	230	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

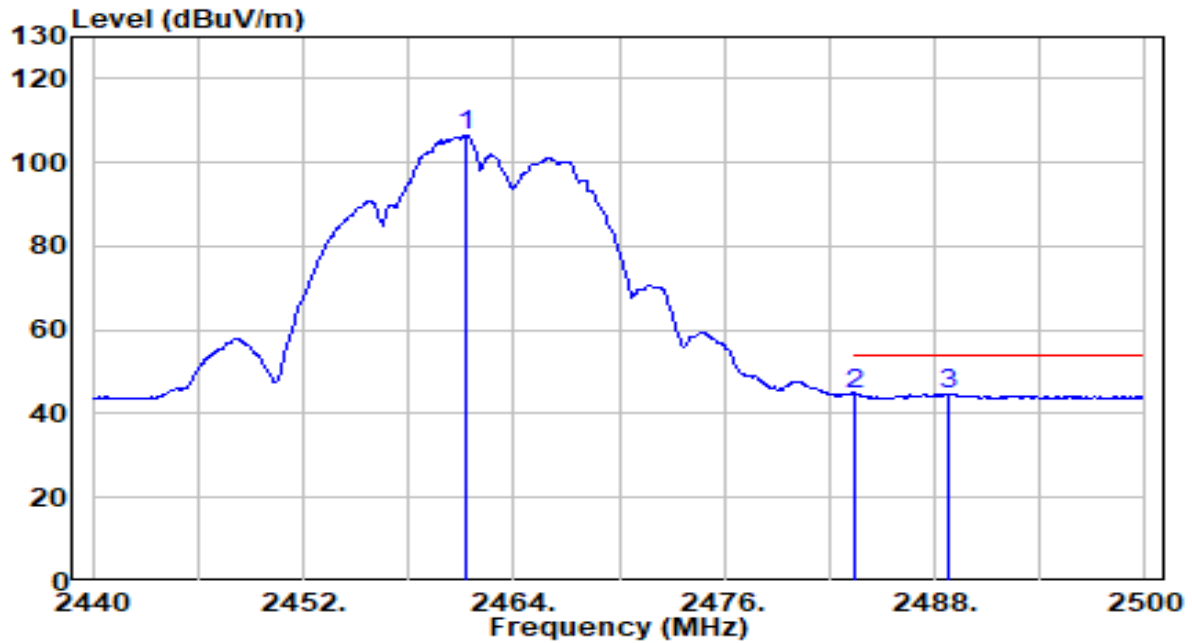


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	75.52	30.84	106.35	N/A	N/A	230	295	Average
2	2483.500	13.57	30.91	44.49	-9.51	54.00	230	295	Average
3	* 2488.720	13.76	30.93	44.69	-9.31	54.00	230	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

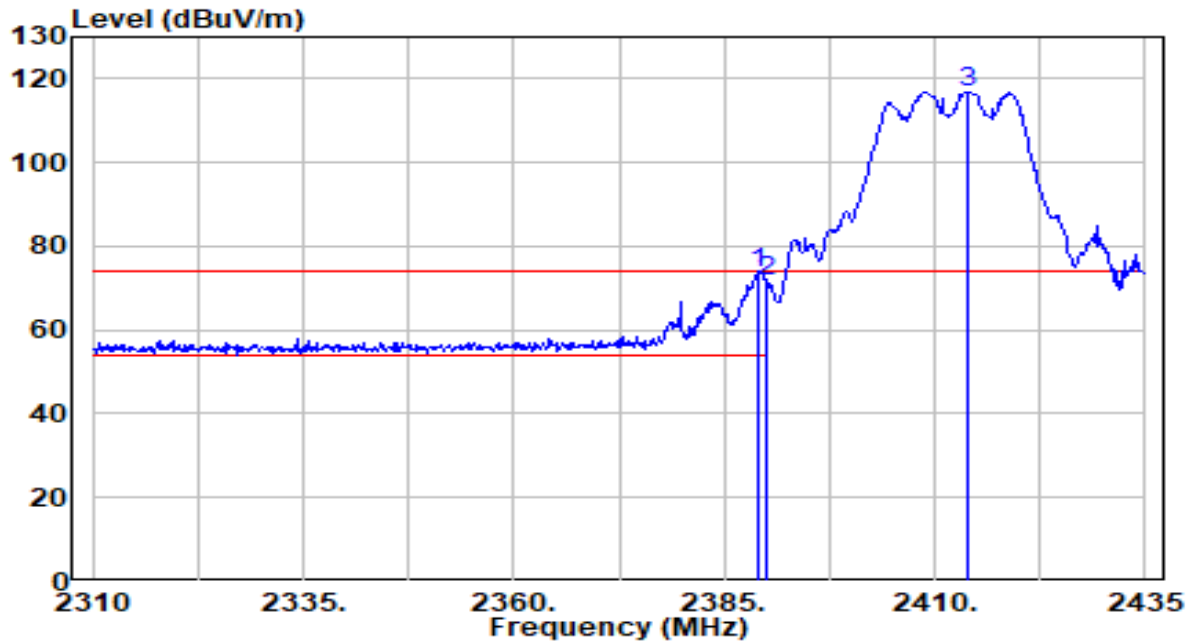


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	43.16	30.61	73.77	-0.23	74.00	225	15	Peak
2		2390.000	40.86	30.61	71.47	-2.53	74.00	225	15	Peak
3		2413.875	86.20	30.68	116.87	N/A	N/A	225	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

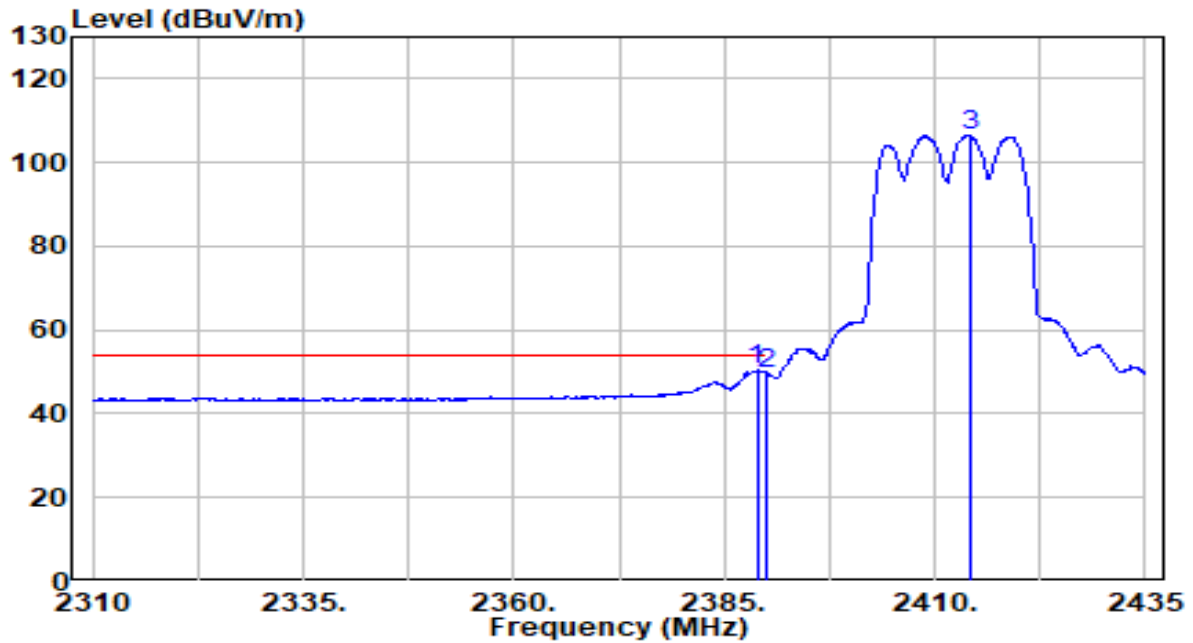


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	19.68	30.61	50.29	-3.71	54.00	225	15	Average
2		2390.000	19.11	30.61	49.73	-4.27	54.00	225	15	Average
3		2414.125	75.80	30.68	106.47	N/A	N/A	225	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

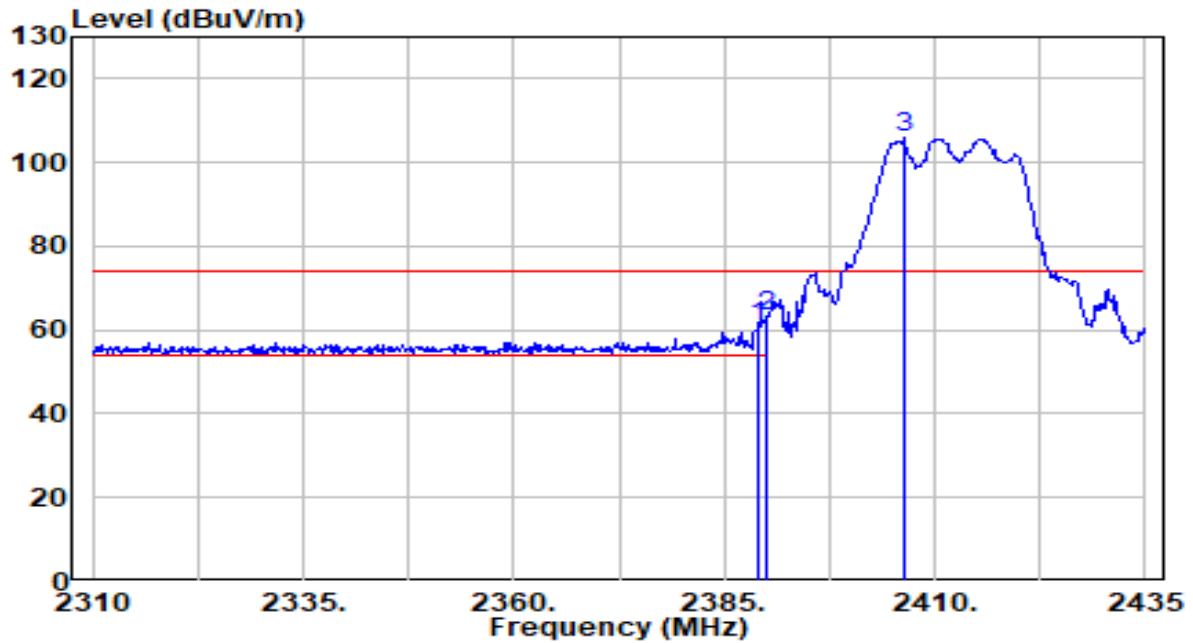


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	30.37	30.61	60.98	-13.02	74.00	120	95	Peak
2	*	2390.000	32.62	30.61	63.24	-10.76	74.00	120	95	Peak
3		2406.250	75.31	30.65	105.96	N/A	N/A	120	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

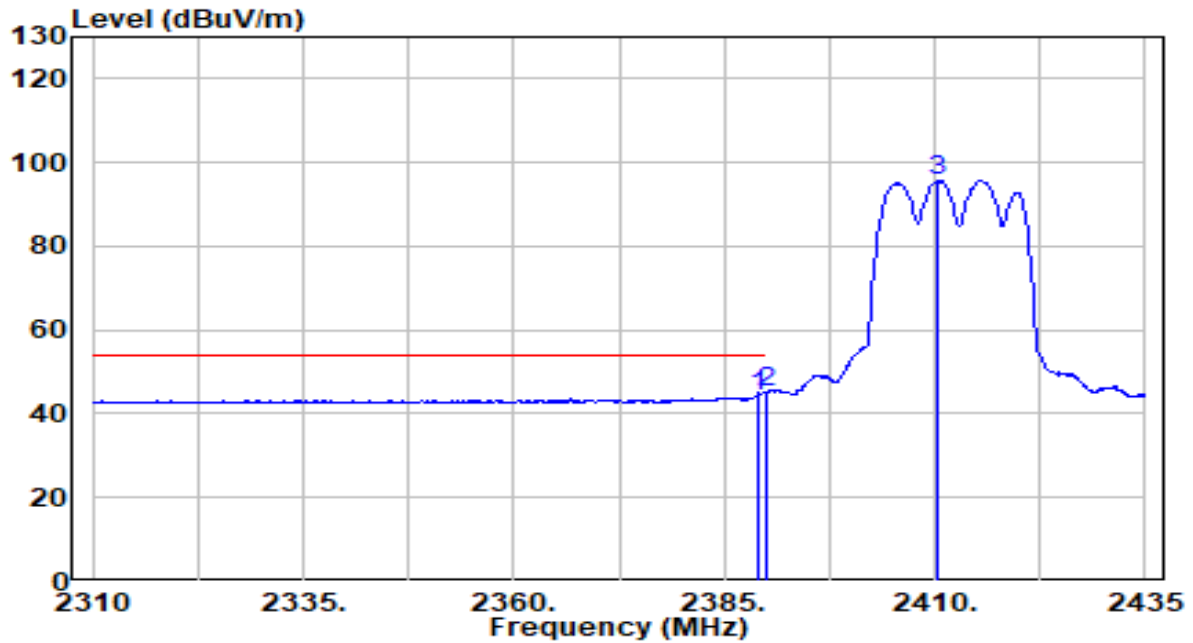


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	13.70	30.61	44.31	-9.69	54.00	120	95	Average
2	*	2390.000	14.60	30.61	45.21	-8.79	54.00	120	95	Average
3		2410.375	64.95	30.66	95.61	N/A	N/A	120	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

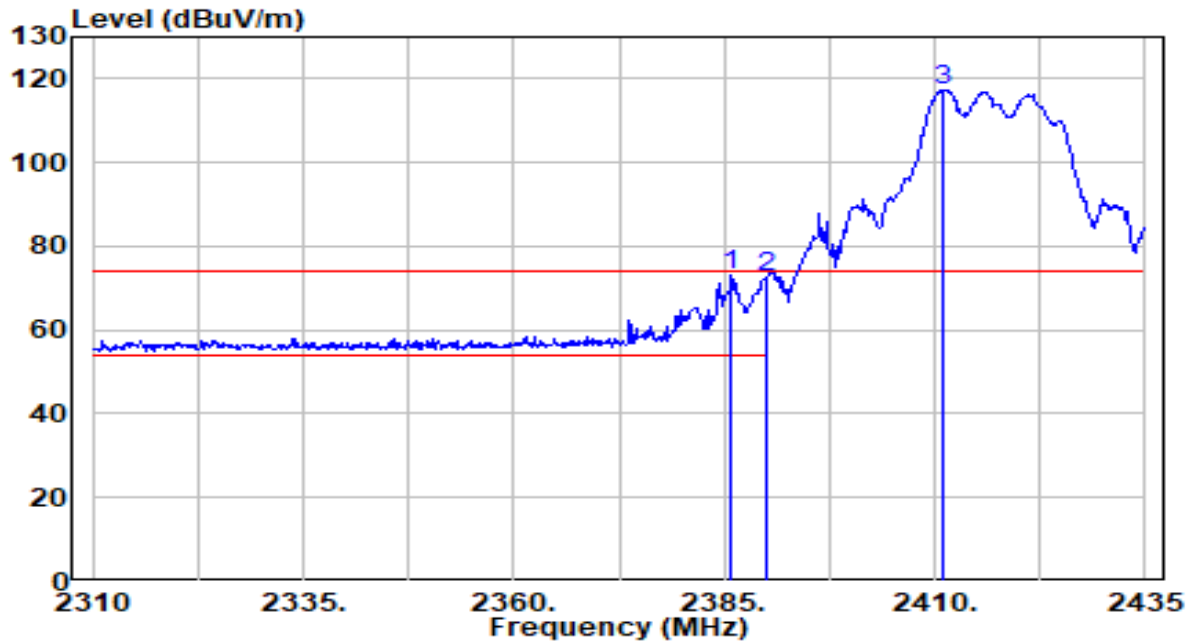


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.750	42.36	30.61	72.97	-1.03	74.00	110	0	Peak
2		2390.000	42.10	30.61	72.71	-1.29	74.00	110	0	Peak
3		2411.000	86.74	30.67	117.40	N/A	N/A	110	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

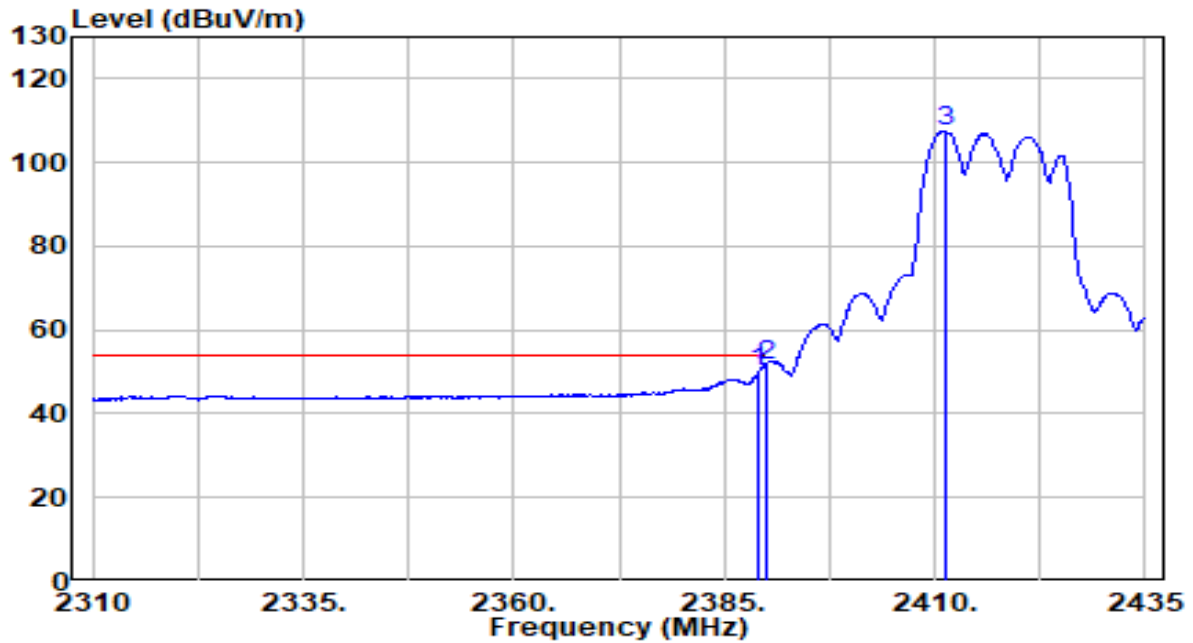


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	19.32	30.61	49.93	-4.07	54.00	110	0	Average
2	*	2390.000	21.03	30.61	51.64	-2.36	54.00	110	0	Average
3		2411.250	76.81	30.67	107.47	N/A	N/A	110	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

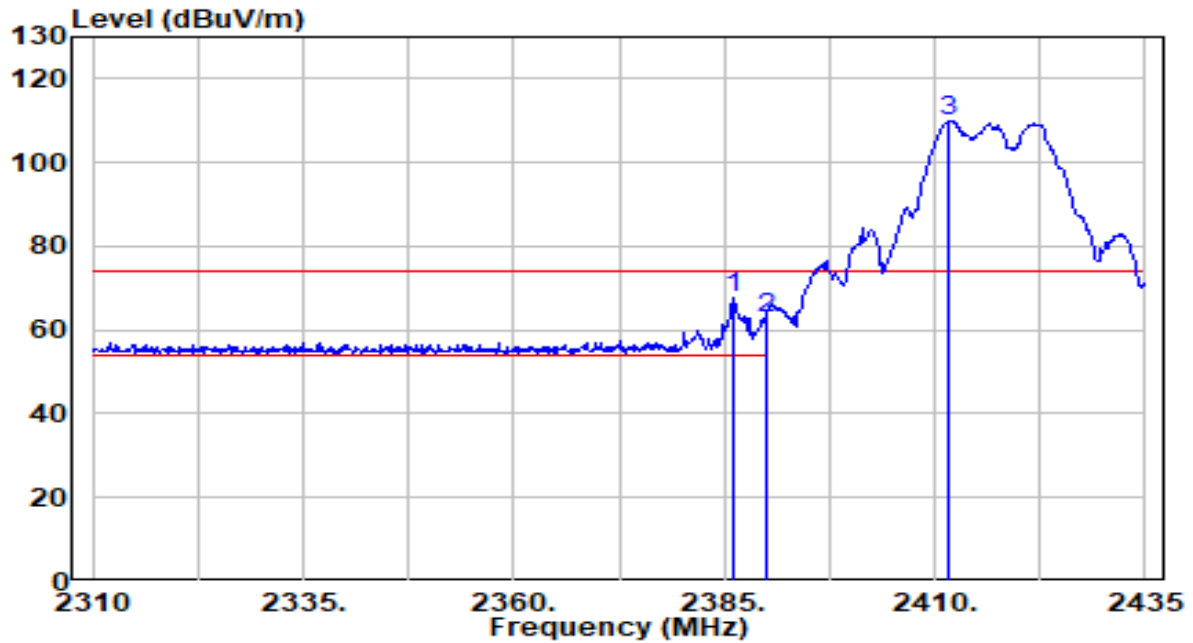


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.125	37.02	30.61	67.62	-6.38	74.00	130	45	Peak
2		2390.000	32.32	30.61	62.94	-11.06	74.00	130	45	Peak
3		2411.750	79.39	30.67	110.05	N/A	N/A	130	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

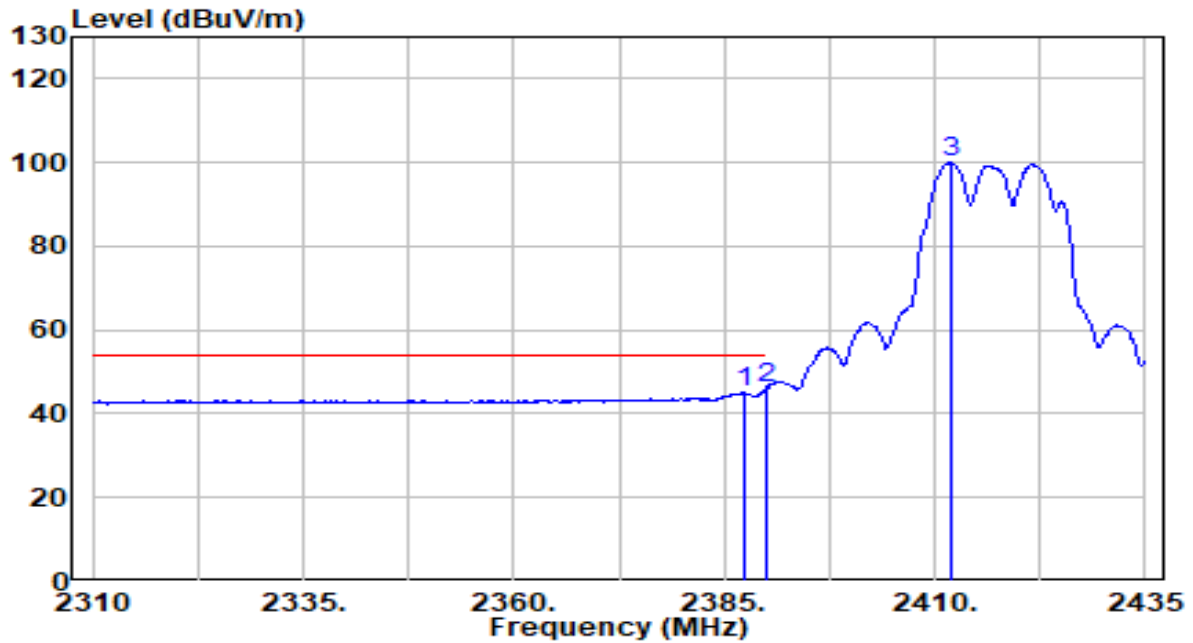


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.375	14.29	30.61	44.90	-9.10	54.00	130	45	Average
2	*	2390.000	15.71	30.61	46.32	-7.68	54.00	130	45	Average
3		2411.875	69.31	30.67	99.98	N/A	N/A	130	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

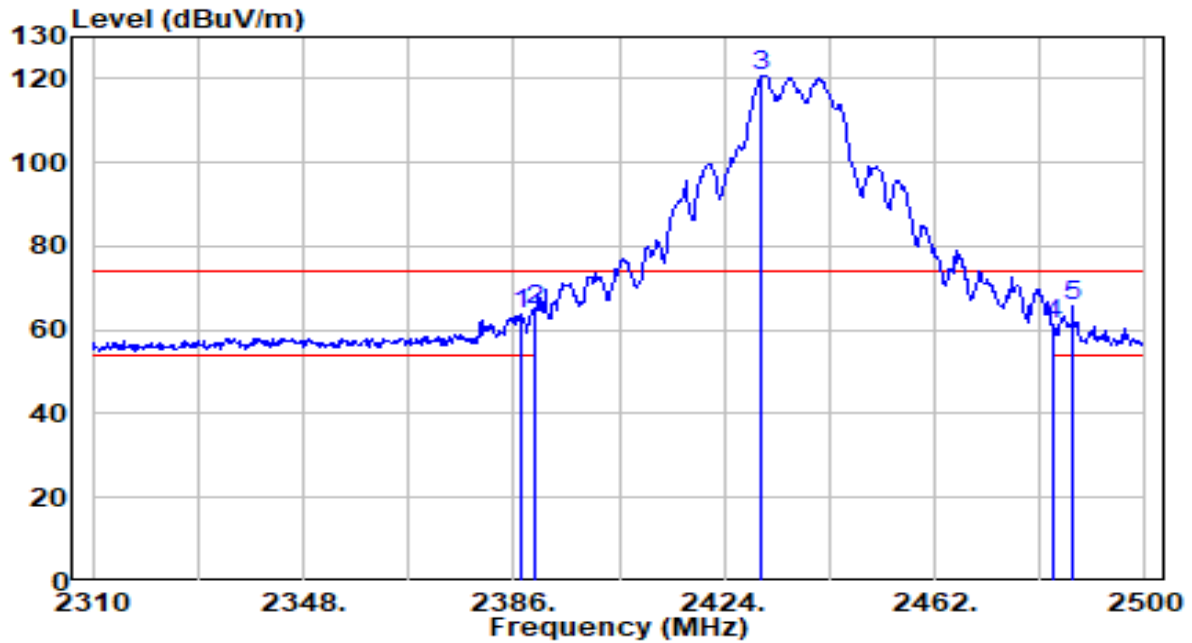


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	32.94	30.61	63.55	-10.45	74.00	110	0	Peak
2	2390.000	34.04	30.61	64.65	-9.35	74.00	110	0	Peak
3	2430.840	90.03	30.73	120.76	N/A	N/A	110	0	Peak
4	2483.500	30.64	30.91	61.55	-12.45	74.00	110	0	Peak
5	* 2486.890	34.68	30.93	65.60	-8.40	74.00	110	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

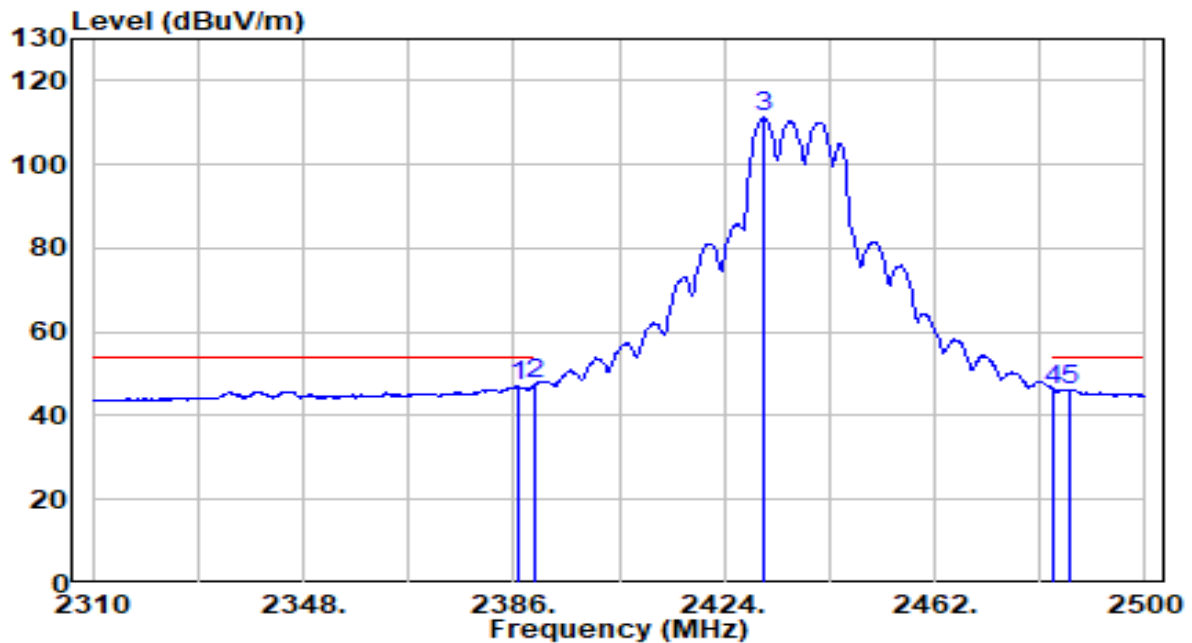


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.760	16.44	30.61	47.05	-6.95	54.00	110	0	Average
2	*	2390.000	17.03	30.61	47.64	-6.36	54.00	110	0	Average
3		2431.030	80.39	30.73	111.13	N/A	N/A	110	0	Average
4		2483.500	15.36	30.91	46.28	-7.72	54.00	110	0	Average
5		2486.510	15.36	30.92	46.29	-7.71	54.00	110	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

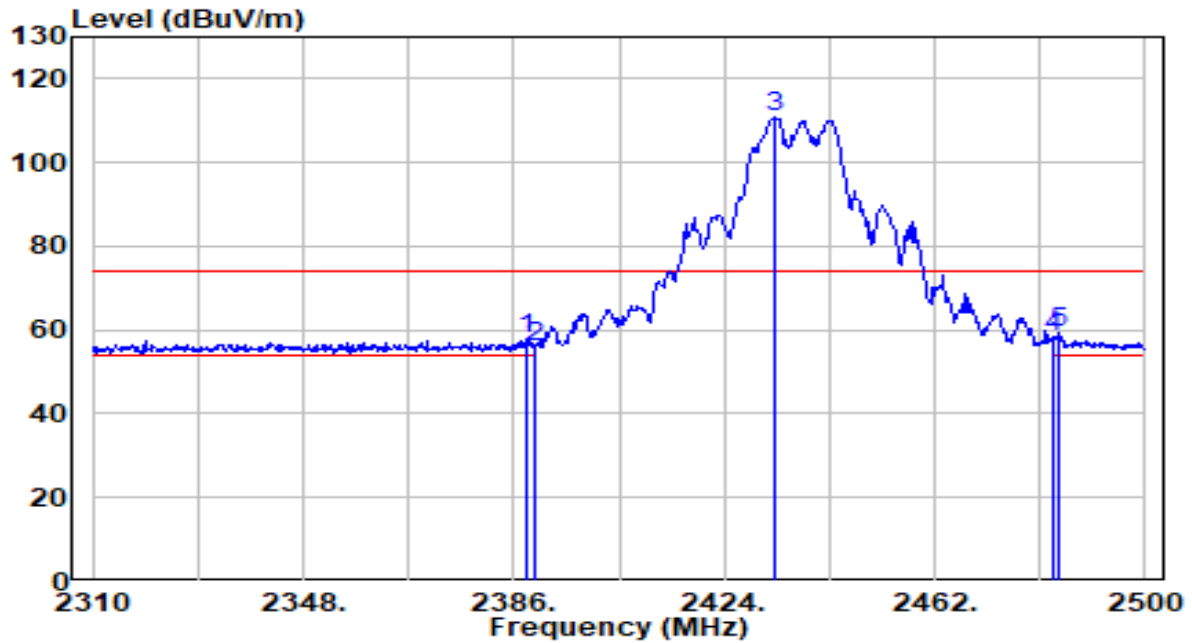


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	27.39	30.61	58.01	-15.99	74.00	110	95	Peak
2	2390.000	25.24	30.61	55.85	-18.15	74.00	110	95	Peak
3	2433.120	79.93	30.74	110.67	N/A	N/A	110	95	Peak
4	2483.500	27.47	30.91	58.38	-15.62	74.00	110	95	Peak
5	* 2484.610	28.43	30.92	59.34	-14.66	74.00	110	95	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

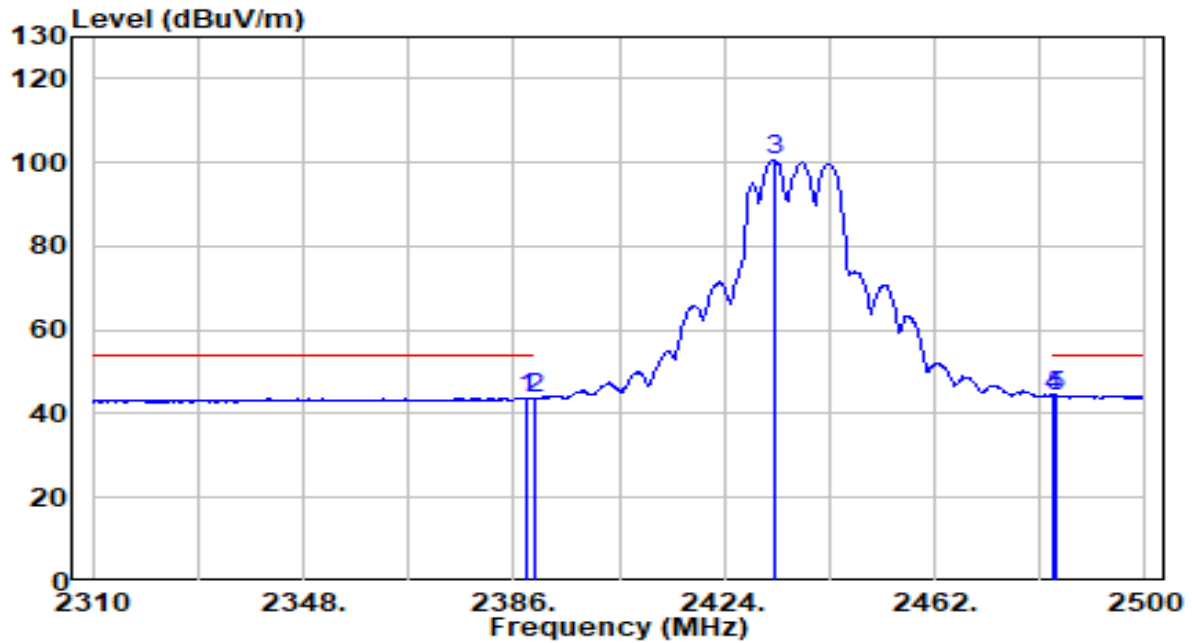


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	13.26	30.61	43.87	-10.13	54.00	110	95	Average
2	2390.000	13.10	30.61	43.71	-10.29	54.00	110	95	Average
3	2433.120	69.78	30.74	100.52	N/A	N/A	110	95	Average
4	2483.500	13.37	30.91	44.29	-9.71	54.00	110	95	Average
5	* 2484.040	13.46	30.92	44.37	-9.63	54.00	110	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

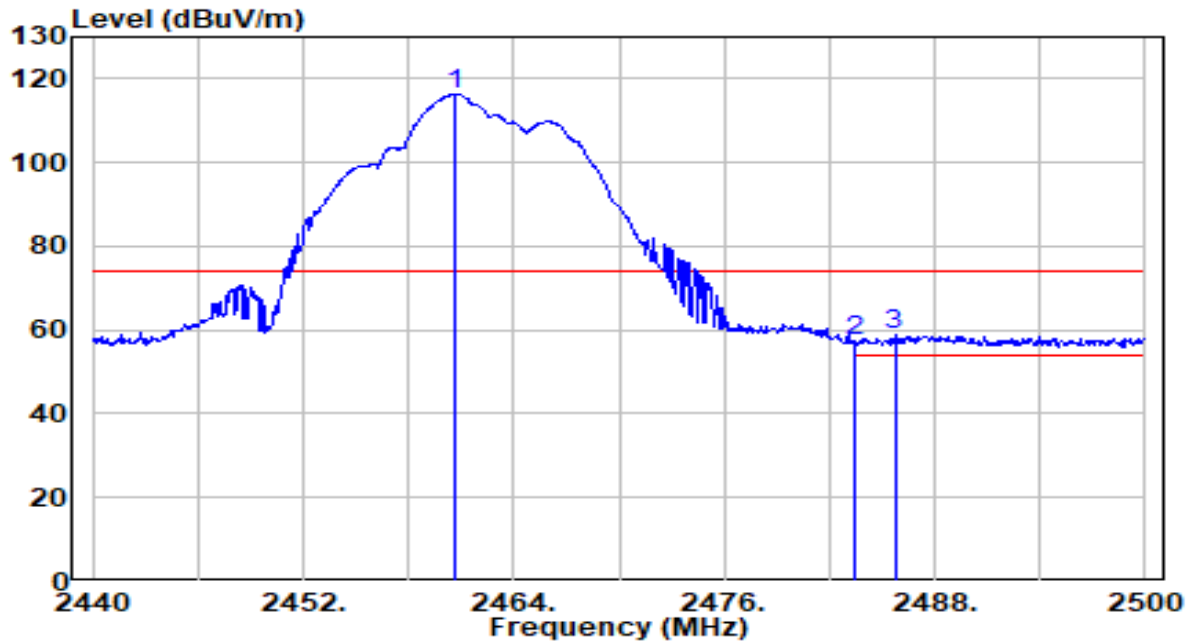


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	85.41	30.84	116.25	N/A	N/A	160	345	Peak
2	2483.500	26.35	30.91	57.26	-16.74	74.00	160	345	Peak
3	* 2485.720	28.02	30.92	58.94	-15.06	74.00	160	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

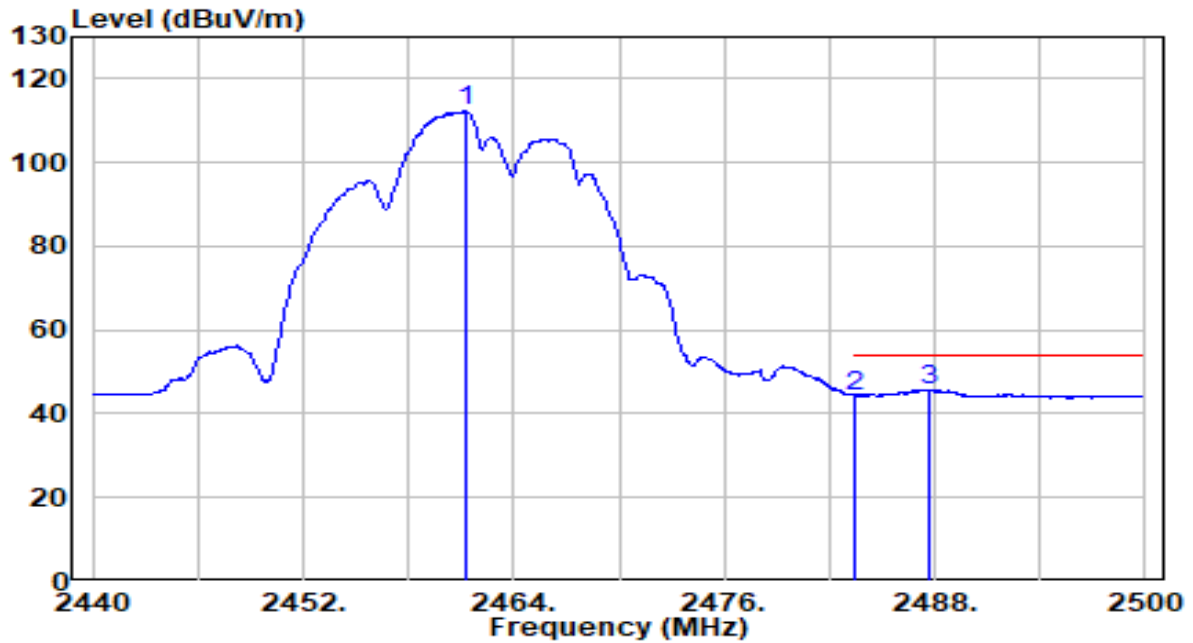


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.300	81.29	30.84	112.13	N/A	N/A	160	345	Average
2	2483.500	13.36	30.91	44.28	-9.72	54.00	160	345	Average
3	* 2487.640	14.87	30.93	45.80	-8.20	54.00	160	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

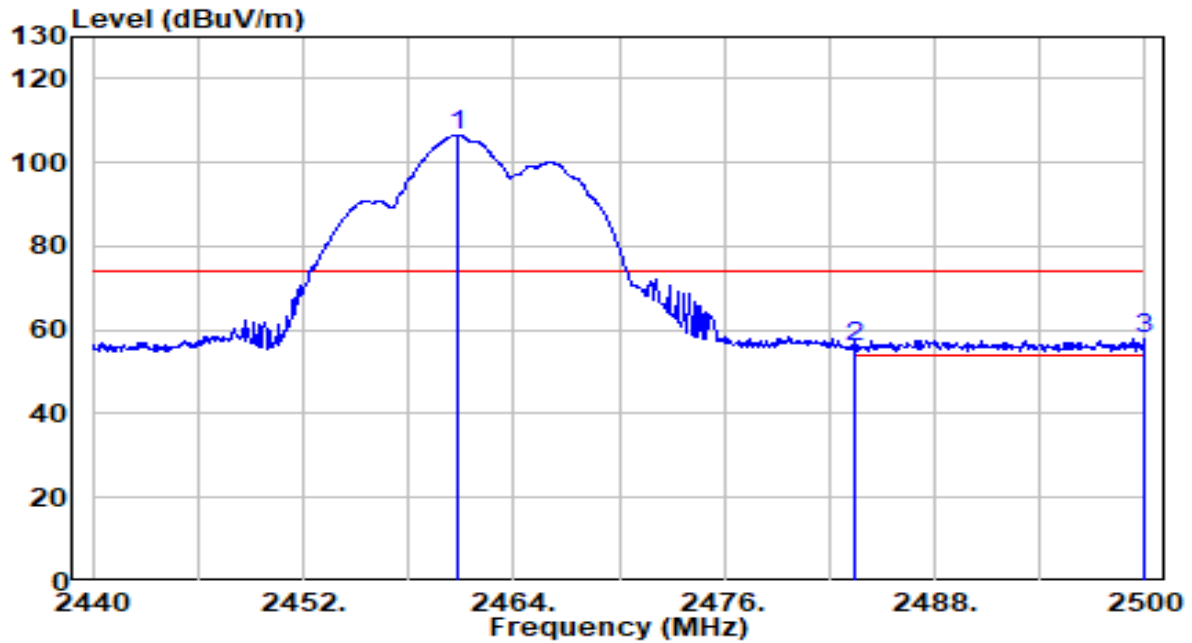


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	75.63	30.84	106.47	N/A	N/A	235	295	Peak
2	2483.500	24.95	30.91	55.86	-18.14	74.00	235	295	Peak
3	* 2499.880	27.08	30.97	58.05	-15.95	74.00	235	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

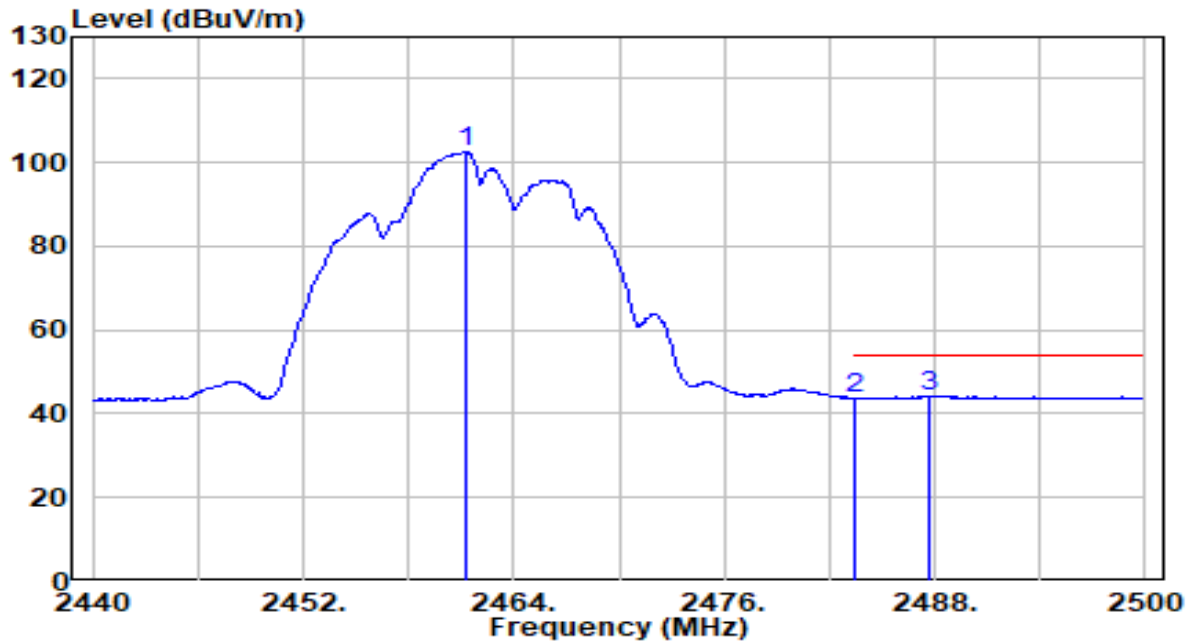


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.300	71.86	30.84	102.69	N/A	N/A	235	295	Average
2	2483.500	12.75	30.91	43.67	-10.33	54.00	235	295	Average
3	* 2487.760	13.39	30.93	44.32	-9.68	54.00	235	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

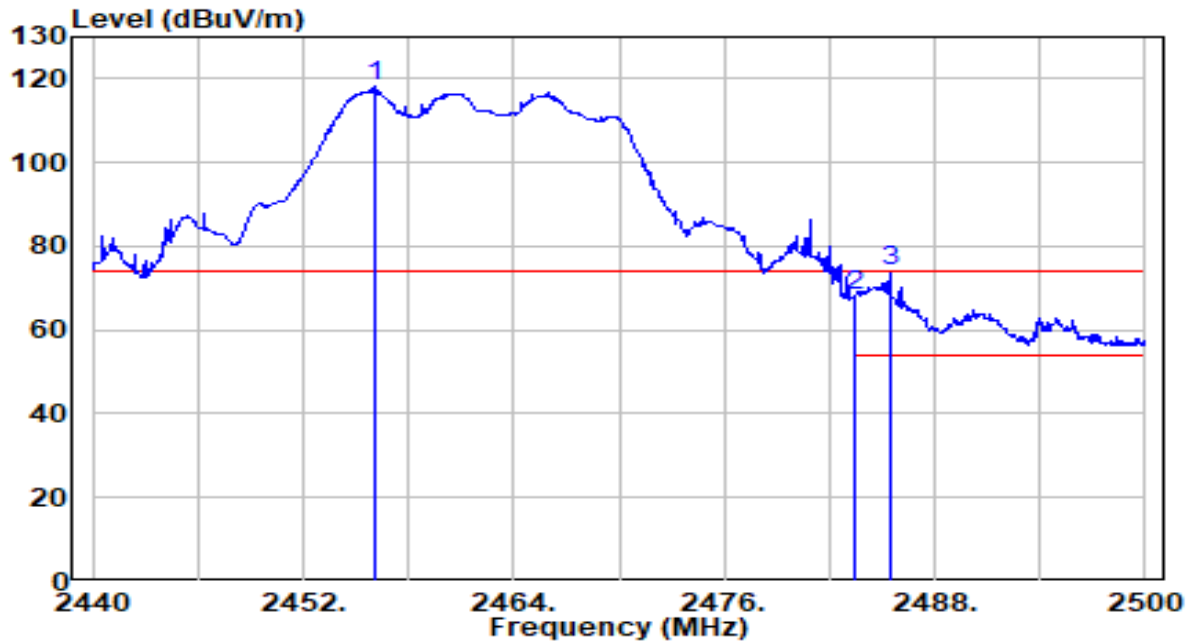


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.140	87.32	30.82	118.14	N/A	N/A	155	350	Peak
2	2483.500	37.30	30.91	68.21	-5.79	74.00	155	350	Peak
3	* 2485.420	42.97	30.92	73.89	-0.11	74.00	155	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

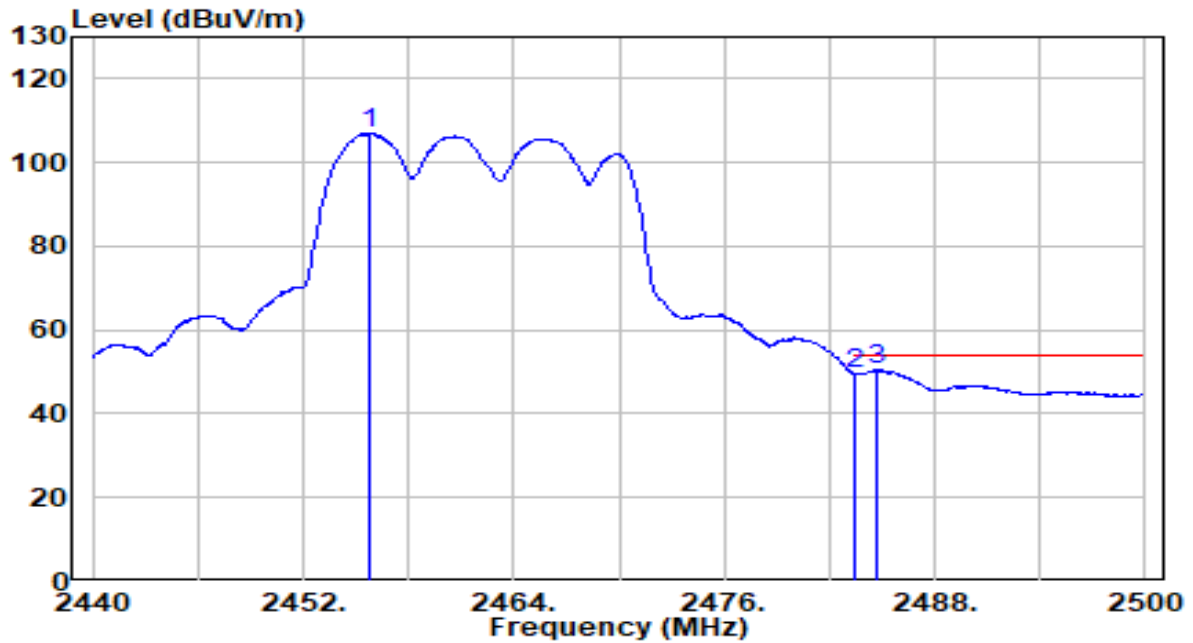


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.720	76.08	30.82	106.90	N/A	N/A	155	350	Average
2		2483.500	18.68	30.91	49.59	-4.41	54.00	155	350	Average
3	*	2484.700	19.58	30.92	50.50	-3.50	54.00	155	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

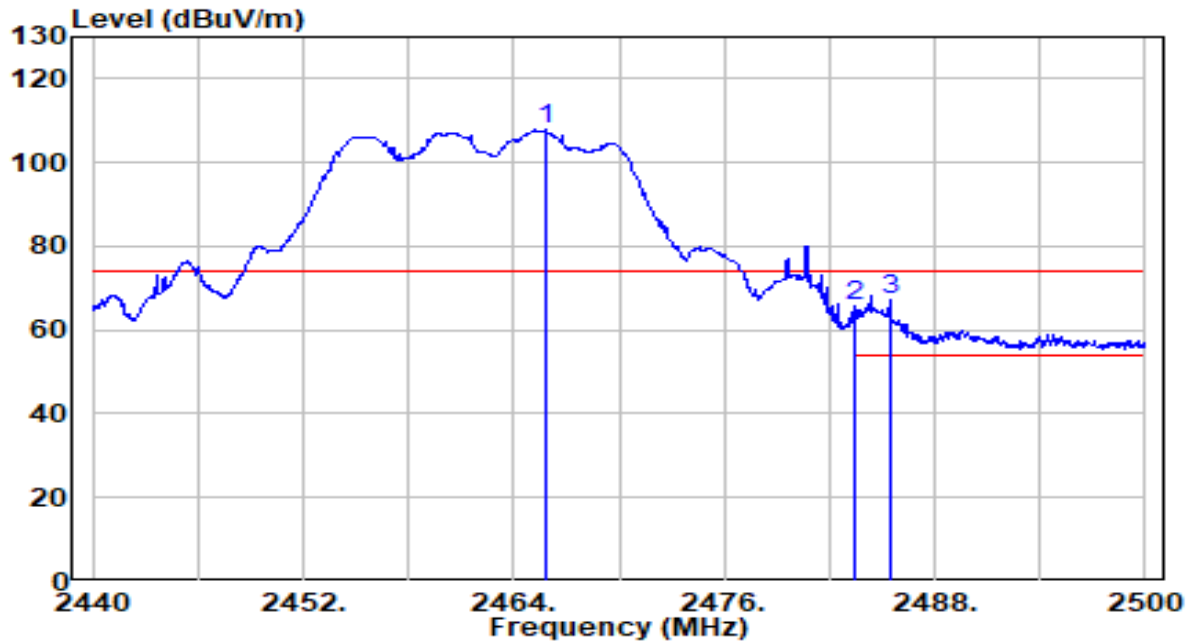


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.860	77.11	30.85	107.96	N/A	N/A	230	295	Peak
2	2483.500	34.92	30.91	65.83	-8.17	74.00	230	295	Peak
3	* 2485.420	36.27	30.92	67.19	-6.81	74.00	230	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

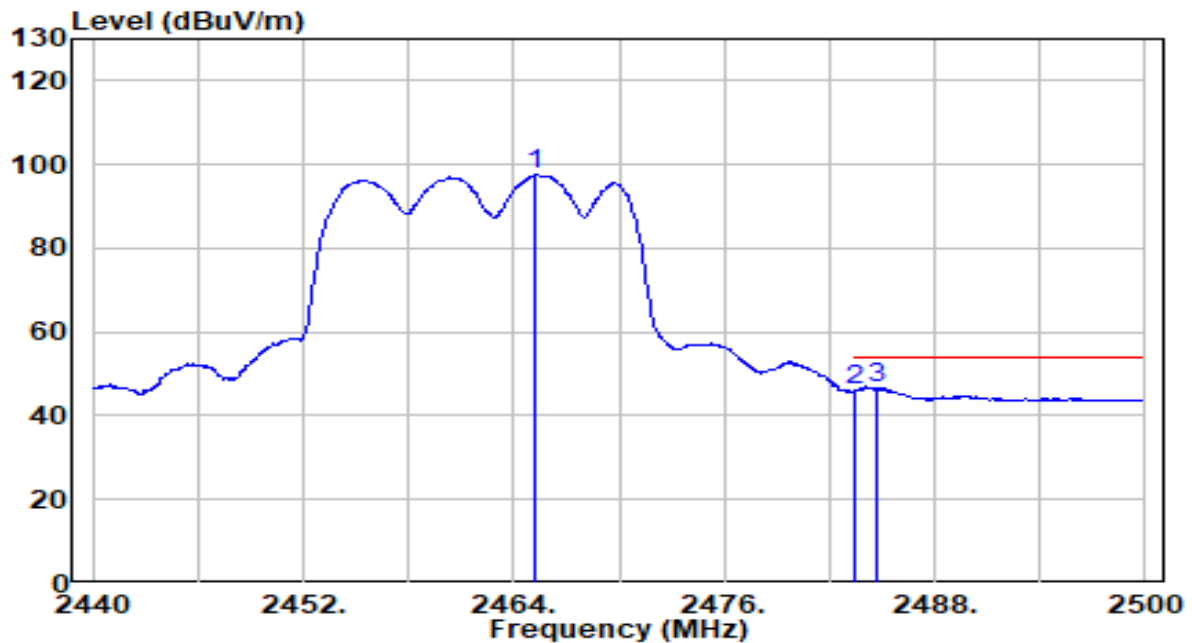


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.260	66.60	30.85	97.46	N/A	N/A	230	295	Average
2	2483.500	15.29	30.91	46.20	-7.80	54.00	230	295	Average
3	* 2484.640	15.86	30.92	46.77	-7.23	54.00	230	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

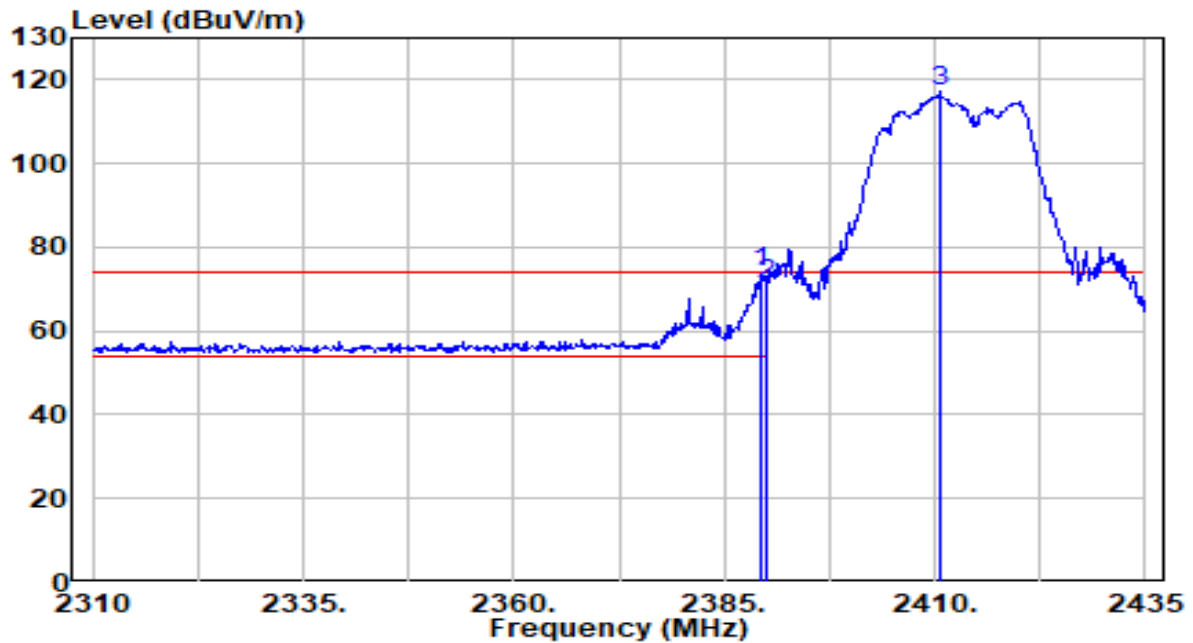


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.375	43.24	30.61	73.85	-0.15	74.00	225	15	Peak
2		2390.000	40.47	30.61	71.08	-2.92	74.00	225	15	Peak
3		2410.500	86.43	30.66	117.10	N/A	N/A	225	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

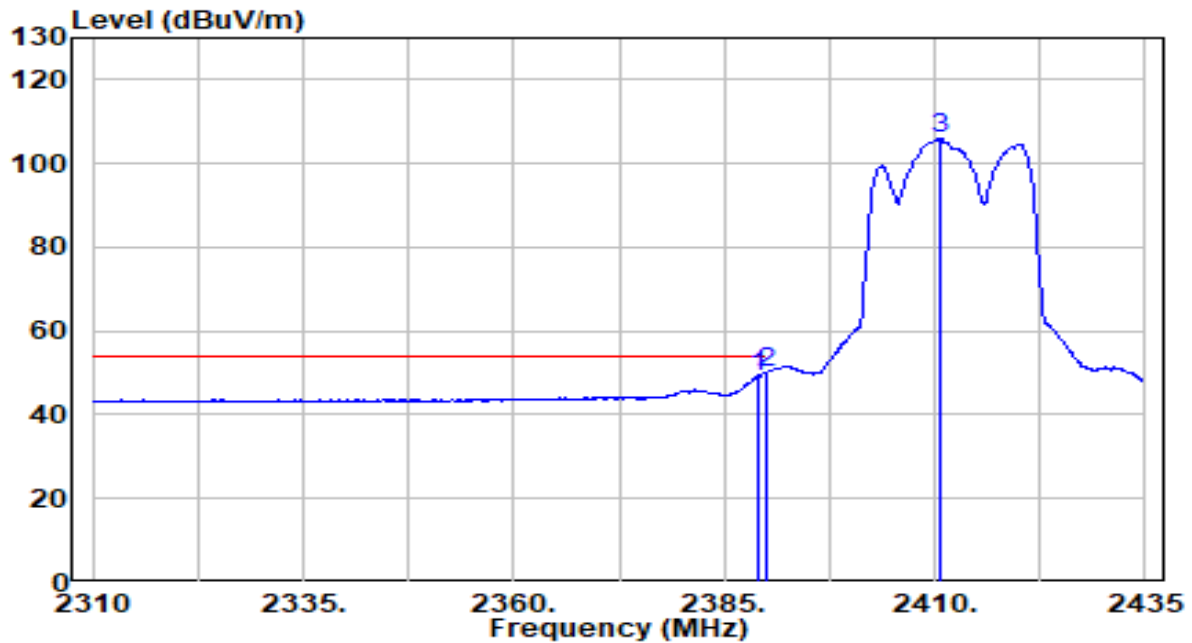


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	18.32	30.61	48.93	-5.07	54.00	225	15	Average
2	*	2390.000	19.44	30.61	50.05	-3.95	54.00	225	15	Average
3		2410.500	75.33	30.66	105.99	N/A	N/A	225	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

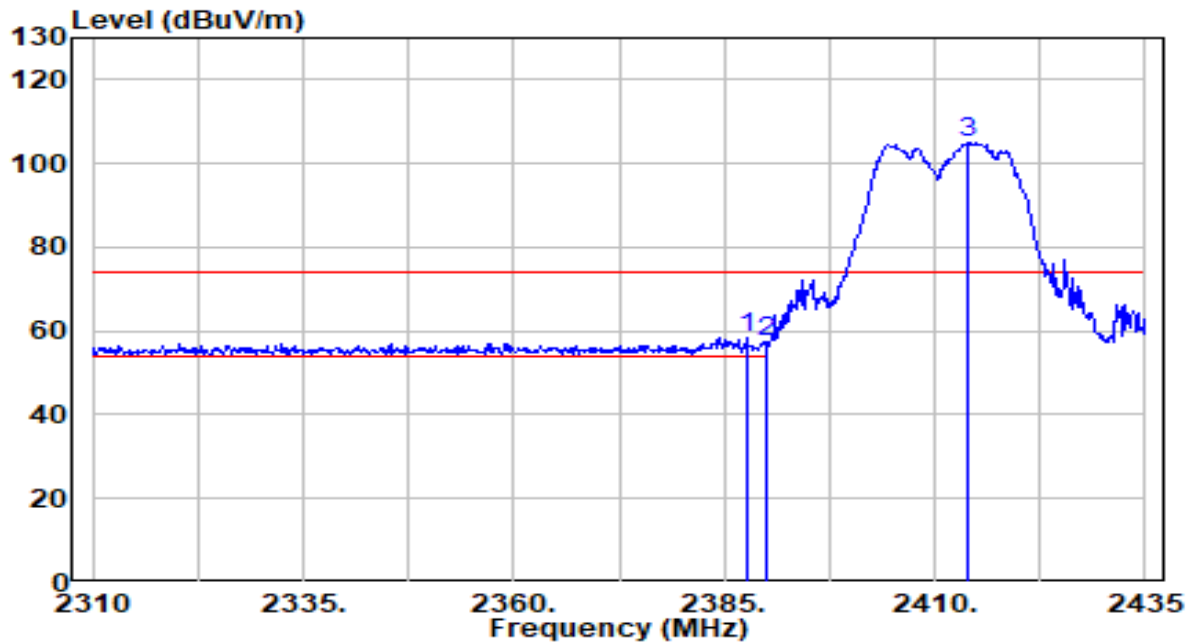


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	27.86	30.61	58.47	-15.53	74.00	120	95	Peak
2		2390.000	27.01	30.61	57.62	-16.38	74.00	120	95	Peak
3		2413.875	74.46	30.68	105.13	N/A	N/A	120	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

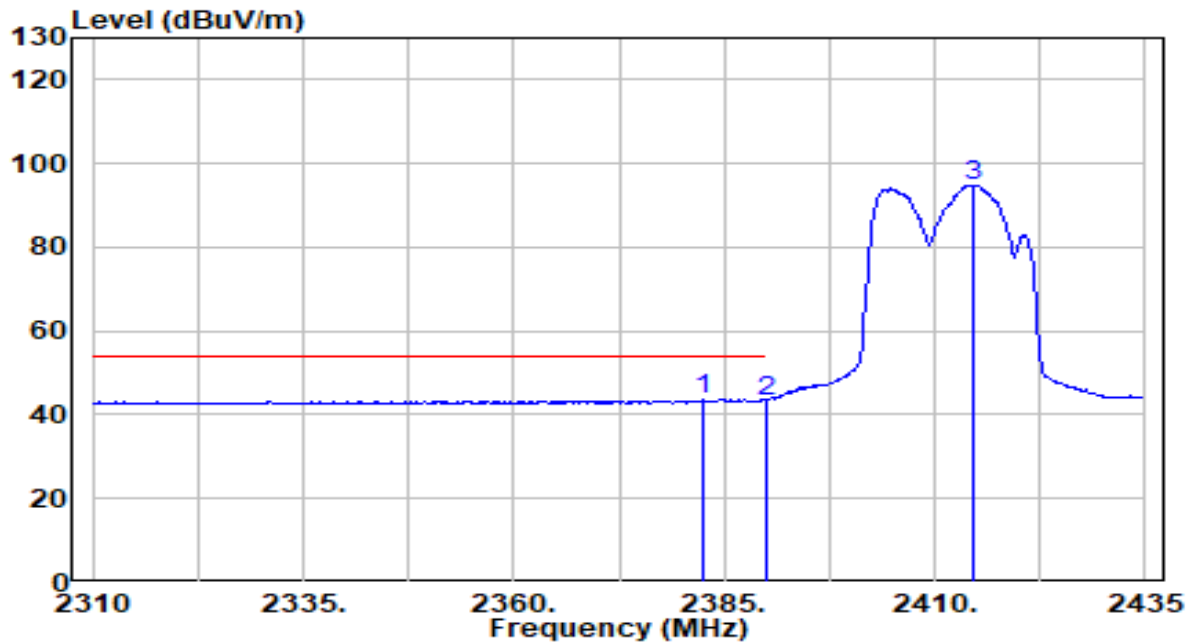


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.500	13.07	30.60	43.68	-10.32	54.00	120	95	Average
2		2390.000	12.78	30.61	43.39	-10.61	54.00	120	95	Average
3		2414.625	64.15	30.68	94.83	N/A	N/A	120	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

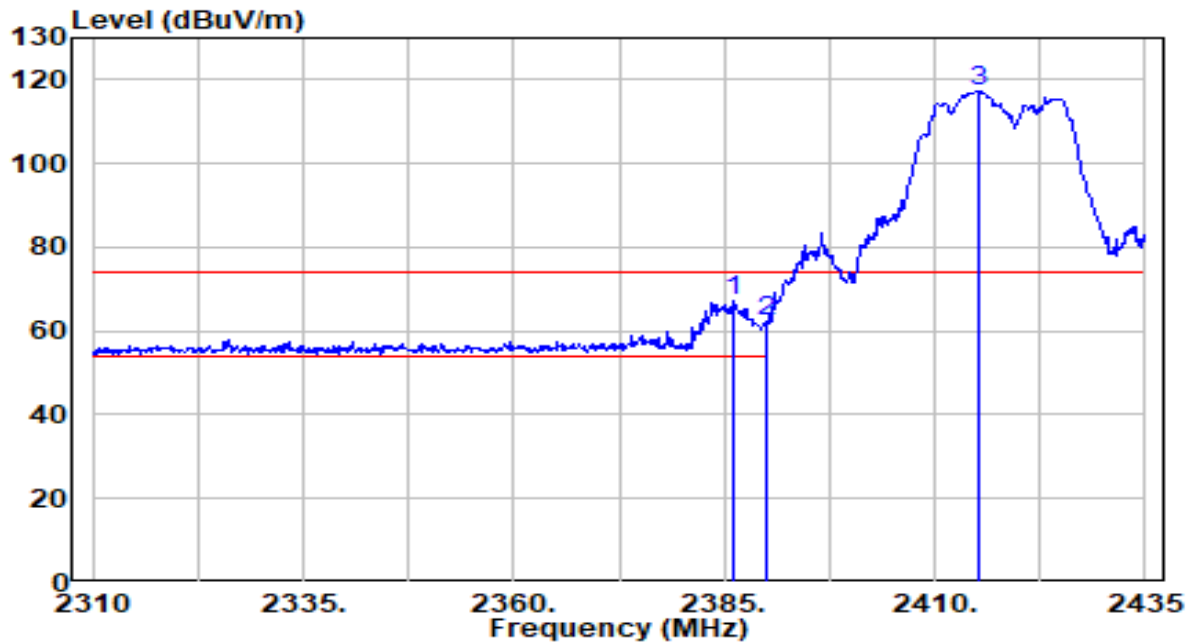


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.250	36.49	30.61	67.10	-6.90	74.00	225	0	Peak
2		2390.000	31.59	30.61	62.20	-11.80	74.00	225	0	Peak
3		2415.250	86.47	30.68	117.15	N/A	N/A	225	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

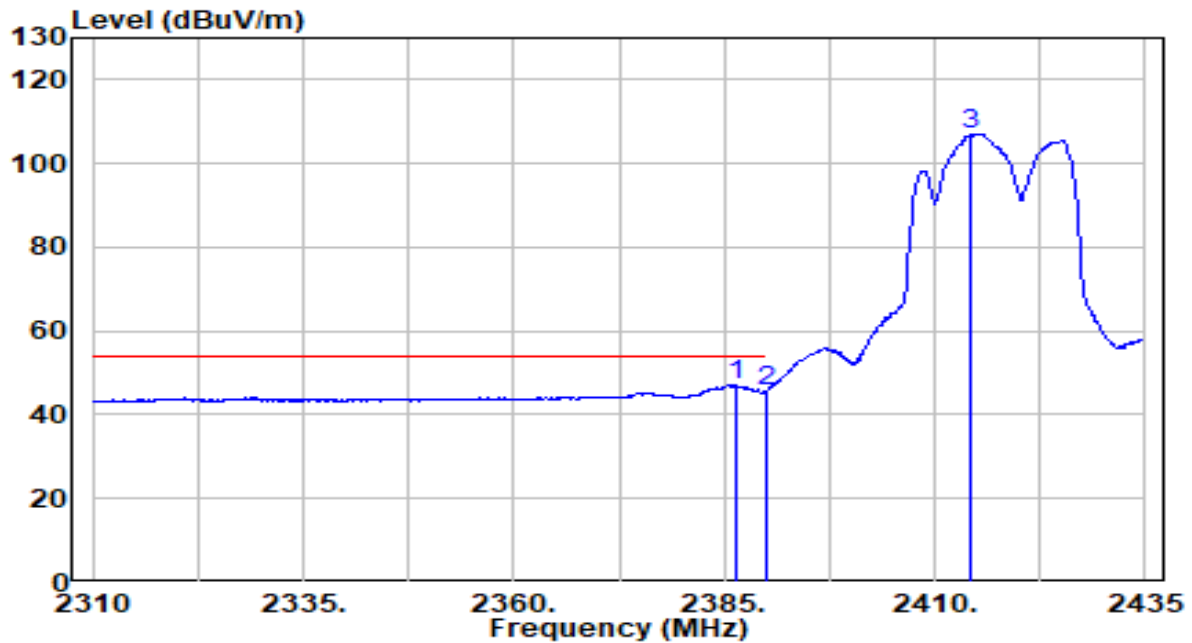


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	16.31	30.61	46.92	-7.08	54.00	225	0	Average
2		2390.000	15.03	30.61	45.65	-8.35	54.00	225	0	Average
3		2414.250	76.24	30.68	106.92	N/A	N/A	225	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

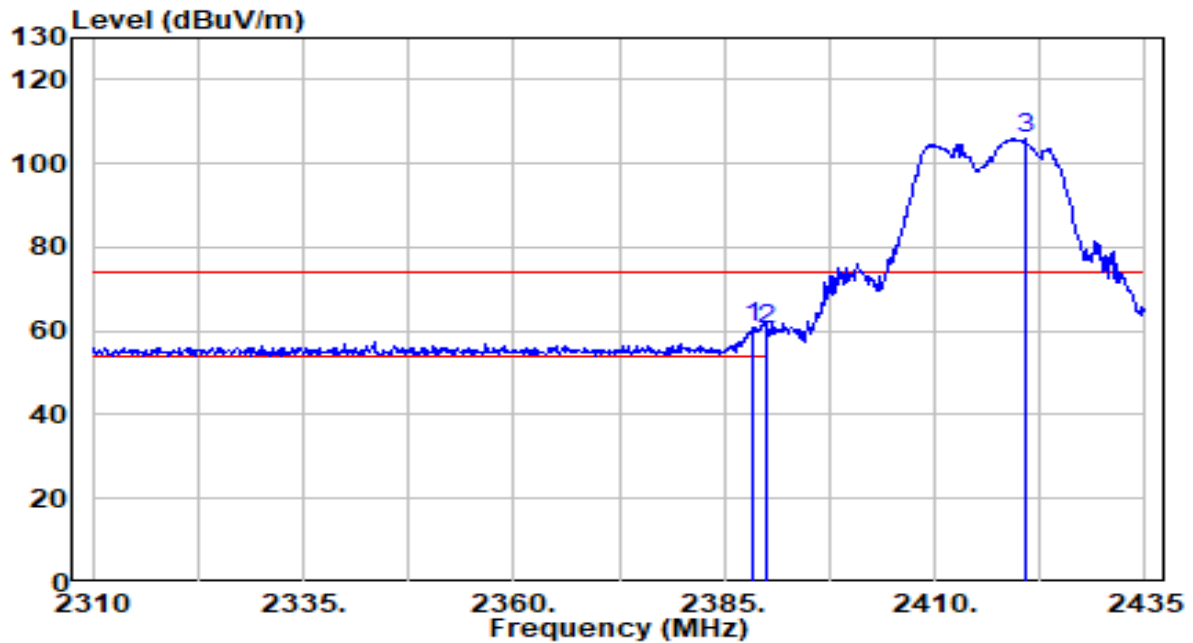


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.500	30.17	30.61	60.79	-13.21	74.00	125	95	Peak
2		2390.000	29.72	30.61	60.34	-13.66	74.00	125	95	Peak
3		2420.750	75.36	30.70	106.06	N/A	N/A	125	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

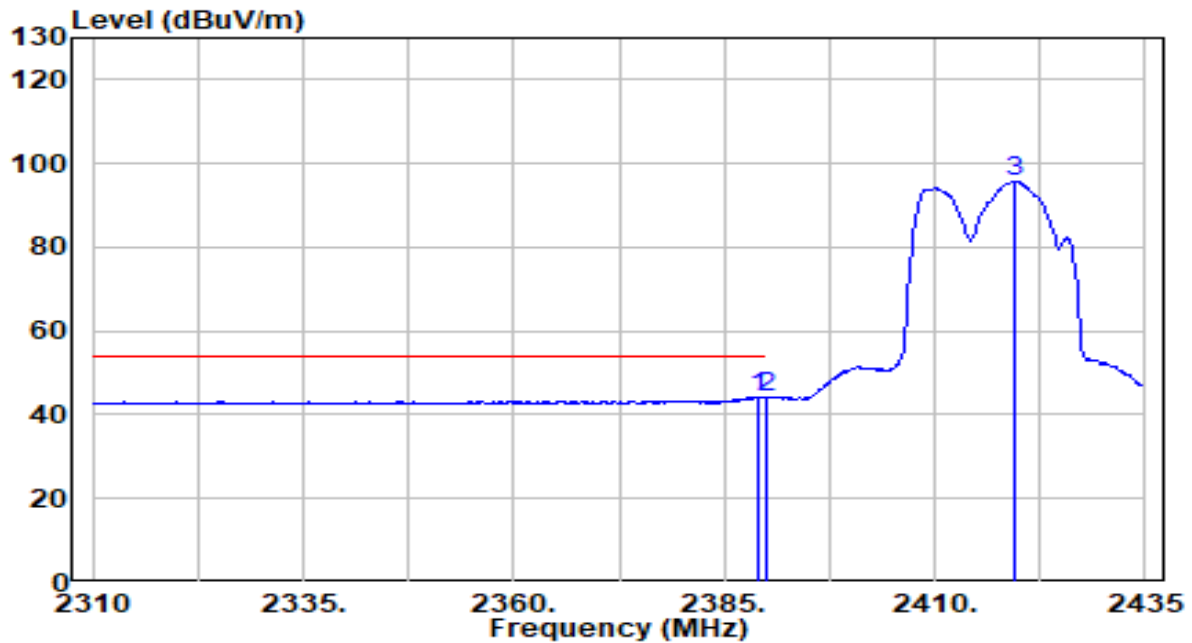


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	13.46	30.61	44.07	-9.93	54.00	125	95	Average
2	*	2390.000	13.65	30.61	44.26	-9.74	54.00	125	95	Average
3		2419.625	64.84	30.70	95.54	N/A	N/A	125	95	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

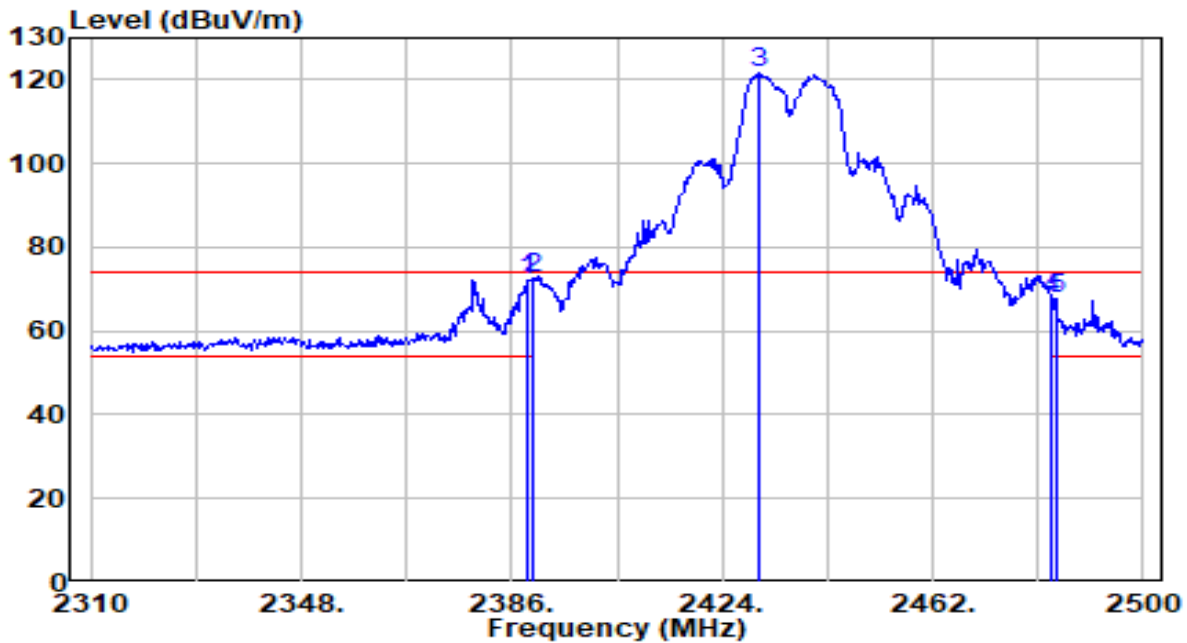


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	41.38	30.61	71.99	-2.01	74.00	120	10	Peak
2	*	2390.000	41.94	30.61	72.55	-1.45	74.00	120	10	Peak
3		2430.650	90.70	30.73	121.44	N/A	N/A	120	10	Peak
4		2483.500	36.78	30.91	67.70	-6.30	74.00	120	10	Peak
5		2484.420	36.77	30.92	67.68	-6.32	74.00	120	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

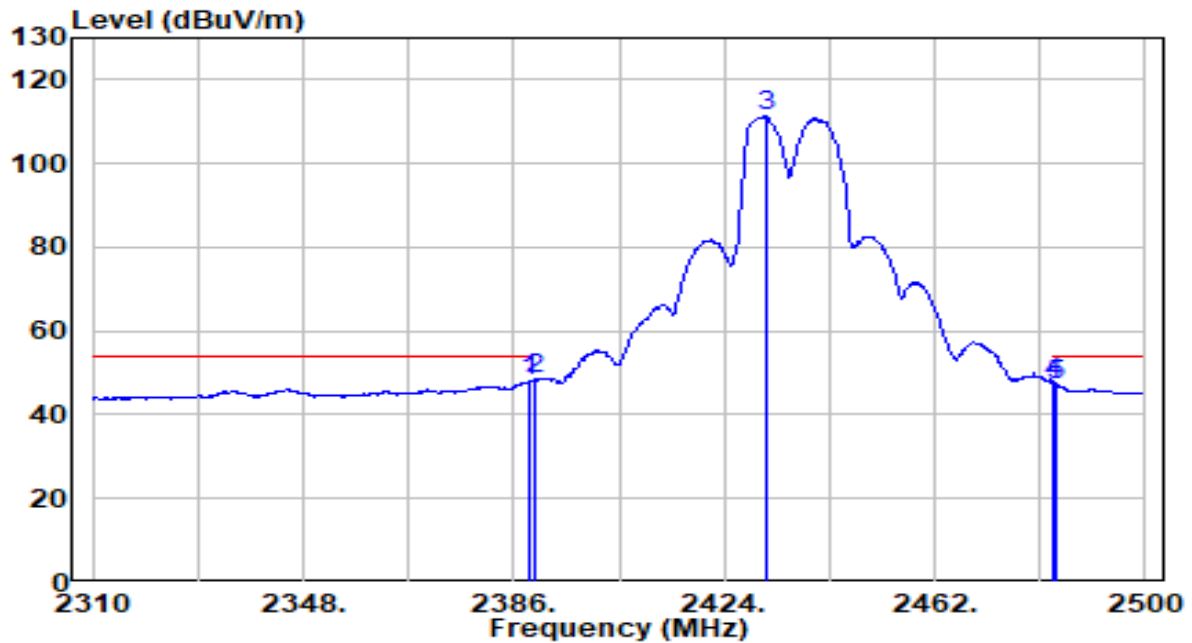


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.850	17.54	30.61	48.16	-5.84	54.00	120	10	Average
2	*	2390.000	17.88	30.61	48.50	-5.50	54.00	120	10	Average
3		2431.410	80.49	30.74	111.22	N/A	N/A	120	10	Average
4		2483.500	16.50	30.91	47.42	-6.58	54.00	120	10	Average
5		2484.040	16.07	30.92	46.99	-7.01	54.00	120	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

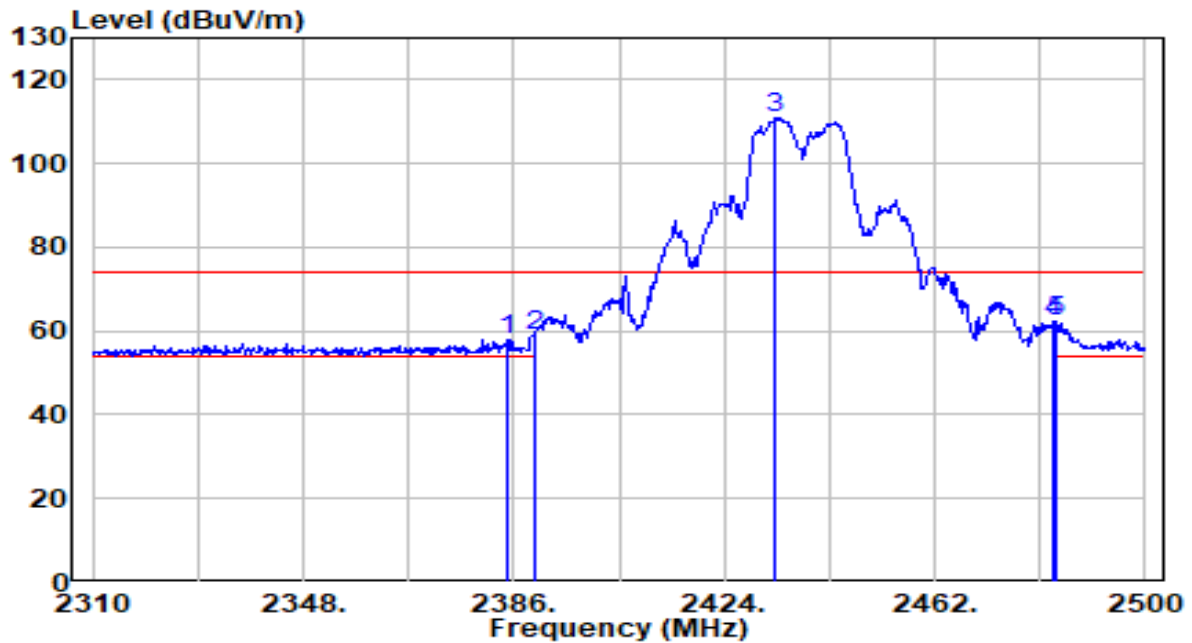


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.050	27.38	30.61	57.99	-16.01	74.00	110	95	Peak
2	2390.000	28.03	30.61	58.64	-15.36	74.00	110	95	Peak
3	2433.310	80.10	30.74	110.84	N/A	N/A	110	95	Peak
4	* 2483.500	31.55	30.91	62.47	-11.53	74.00	110	95	Peak
5	2484.040	31.38	30.92	62.30	-11.70	74.00	110	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

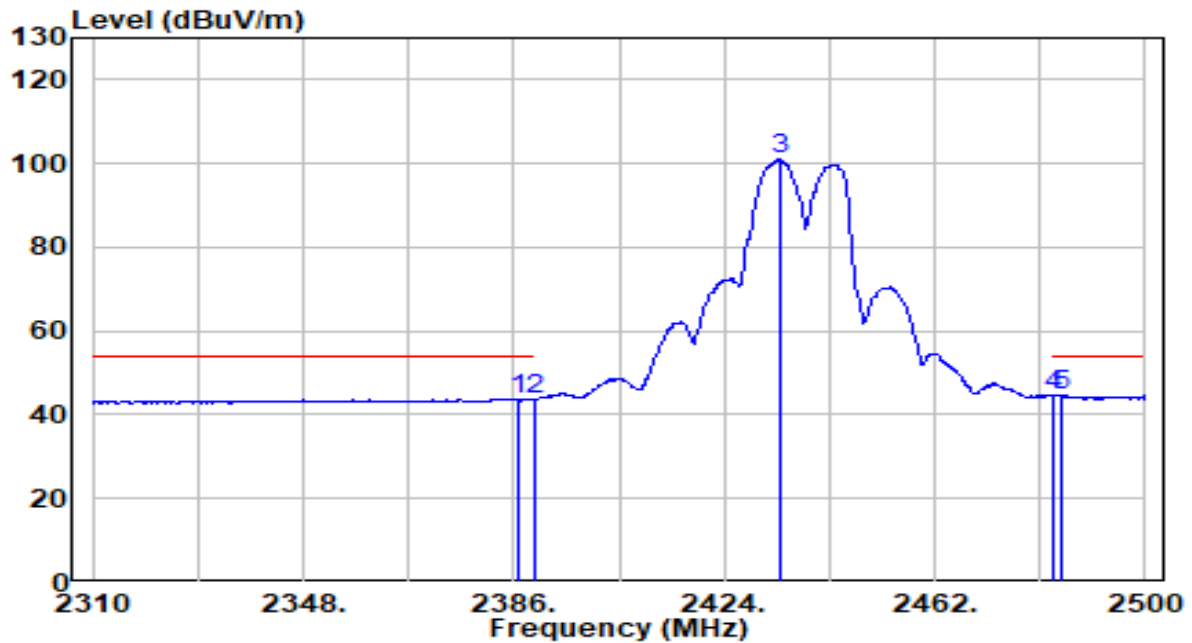


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	13.14	30.61	43.75	-10.25	54.00	110	95	Average
2	2390.000	13.13	30.61	43.75	-10.25	54.00	110	95	Average
3	2434.070	70.15	30.74	100.89	N/A	N/A	110	95	Average
4	2483.500	13.81	30.91	44.72	-9.28	54.00	110	95	Average
5	* 2484.990	13.88	30.92	44.80	-9.20	54.00	110	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

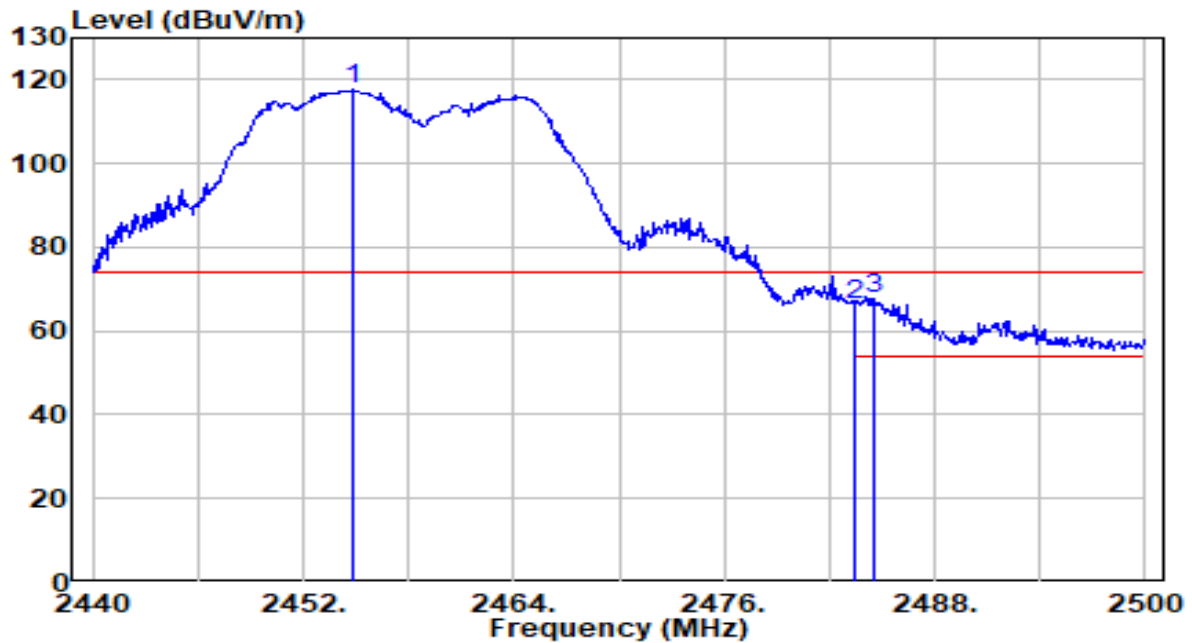


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.880	86.93	30.82	117.75	N/A	N/A	155	350	Peak
2	2483.500	35.54	30.91	66.45	-7.55	74.00	155	350	Peak
3	* 2484.580	36.72	30.92	67.64	-6.36	74.00	155	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

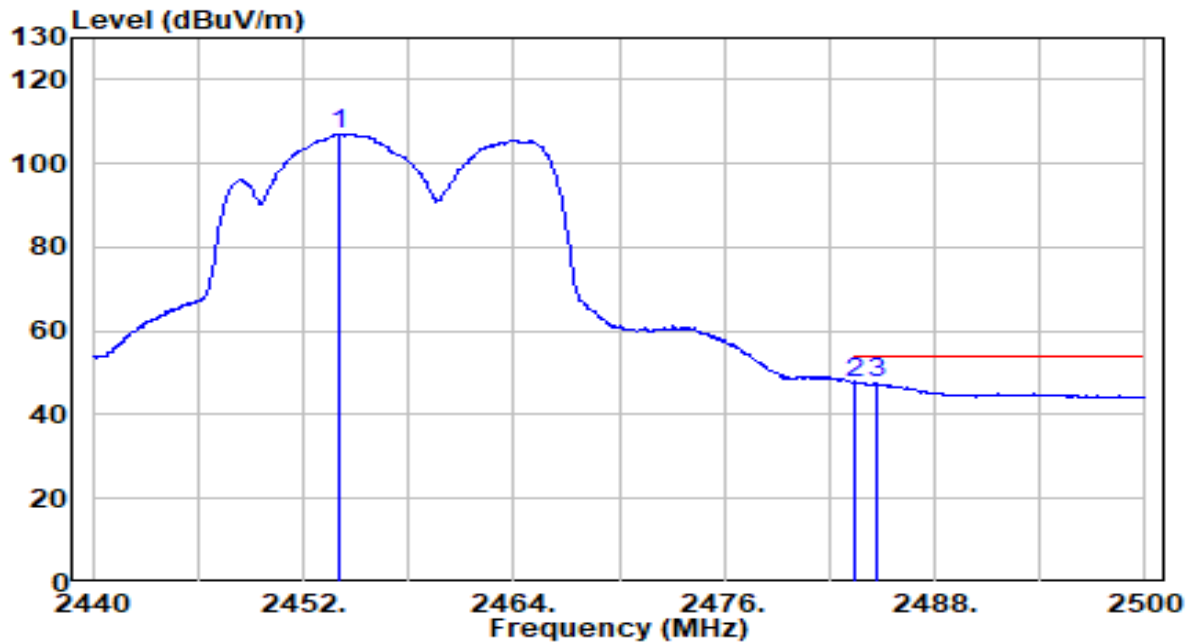


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.040	76.17	30.81	106.98	N/A	N/A	155	350	Average
2	*	2483.500	16.77	30.91	47.69	-6.31	54.00	155	350	Average
3		2484.700	16.54	30.92	47.46	-6.54	54.00	155	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

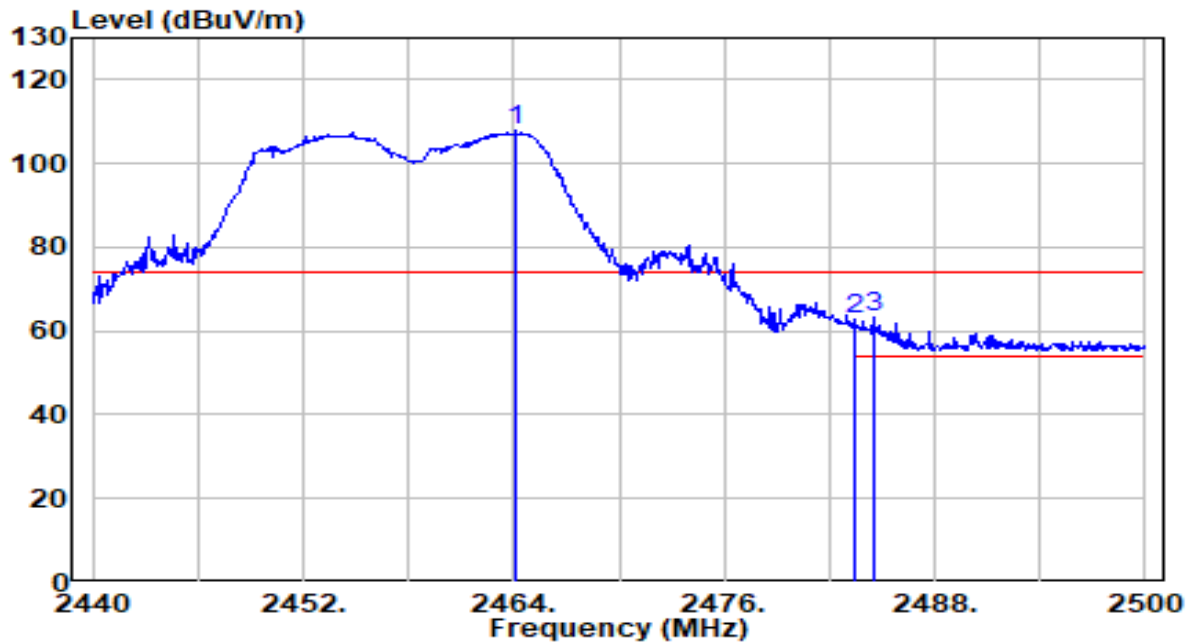


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.180	77.07	30.85	107.92	N/A	N/A	225	295	Peak
2	2483.500	32.11	30.91	63.02	-10.98	74.00	225	295	Peak
3	* 2484.520	32.58	30.92	63.50	-10.50	74.00	225	295	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

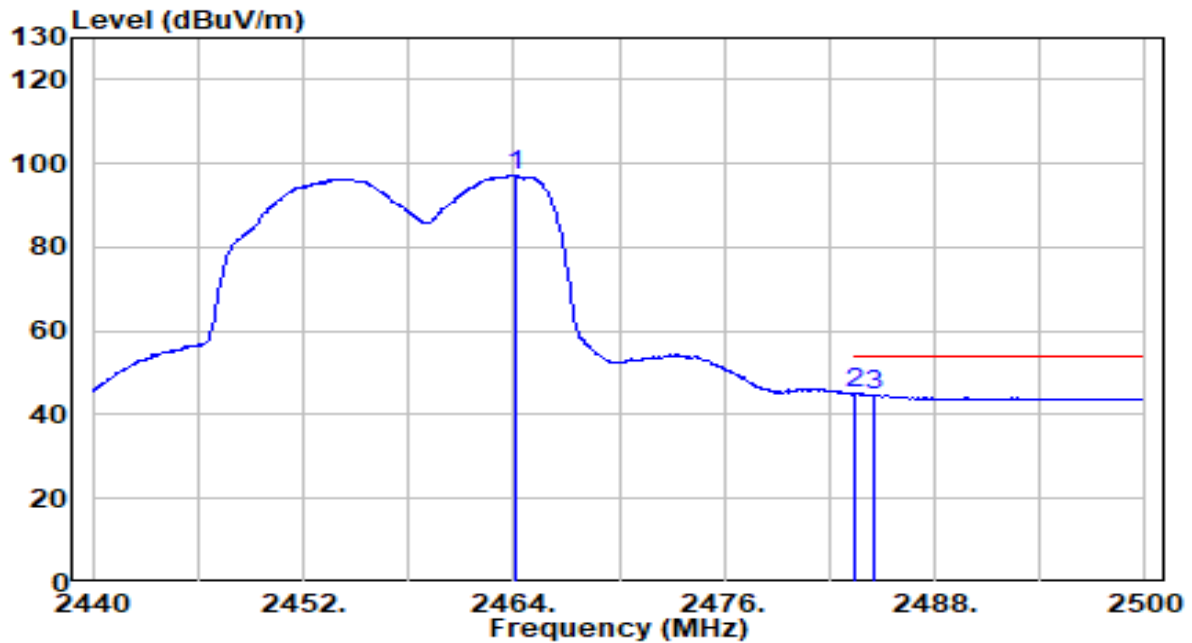


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.120	66.37	30.85	97.22	N/A	N/A	225	295	Average
2	*	2483.500	14.01	30.91	44.93	-9.07	54.00	225	295	Average
3		2484.580	13.65	30.92	44.57	-9.43	54.00	225	295	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

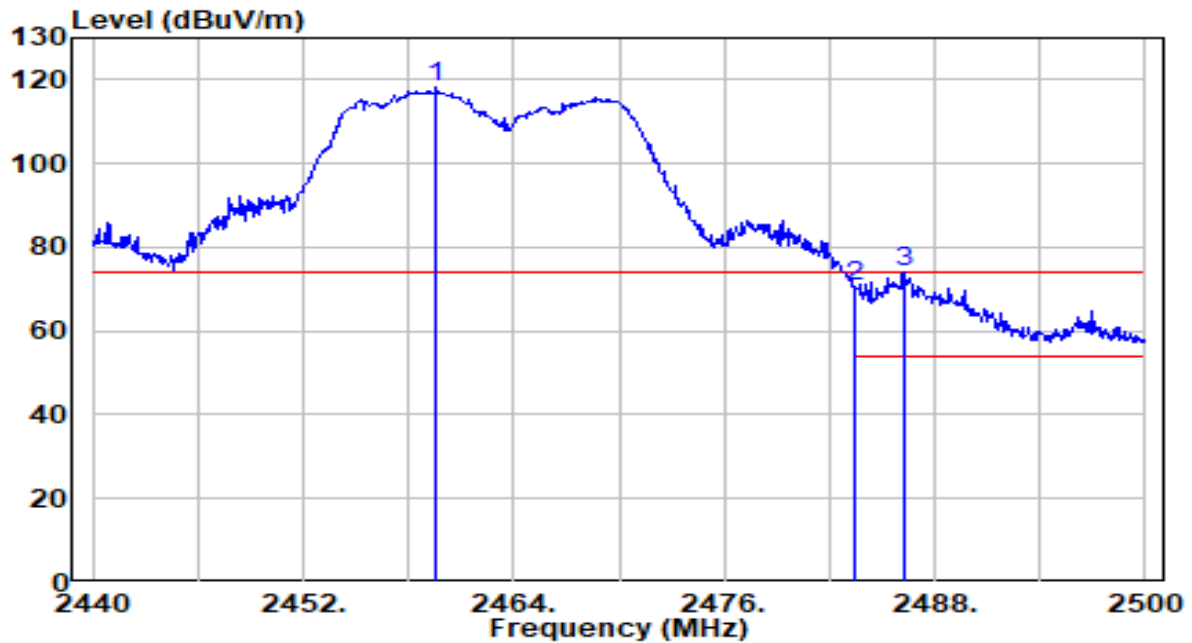


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.620	87.27	30.83	118.10	N/A	N/A	155	345	Peak
2	2483.500	39.62	30.91	70.54	-3.46	74.00	155	345	Peak
3	* 2486.200	42.93	30.92	73.85	-0.15	74.00	155	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

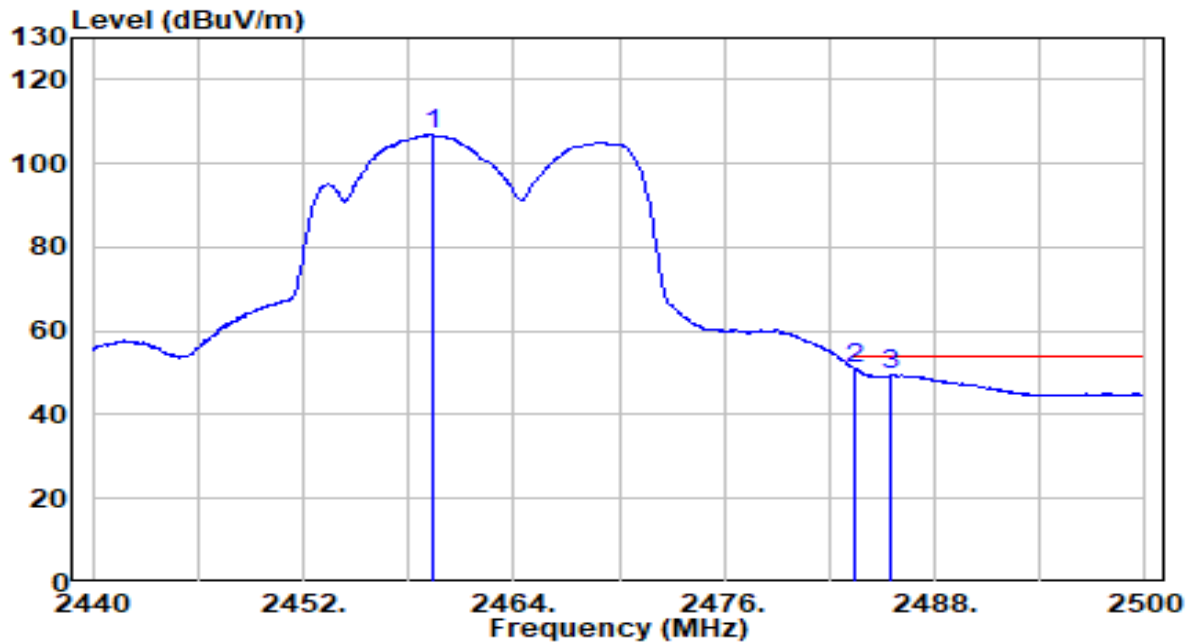


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.380	75.99	30.83	106.82	N/A	N/A	155	345	Average
2	*	2483.500	20.03	30.91	50.94	-3.06	54.00	155	345	Average
3		2485.540	18.66	30.92	49.58	-4.42	54.00	155	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

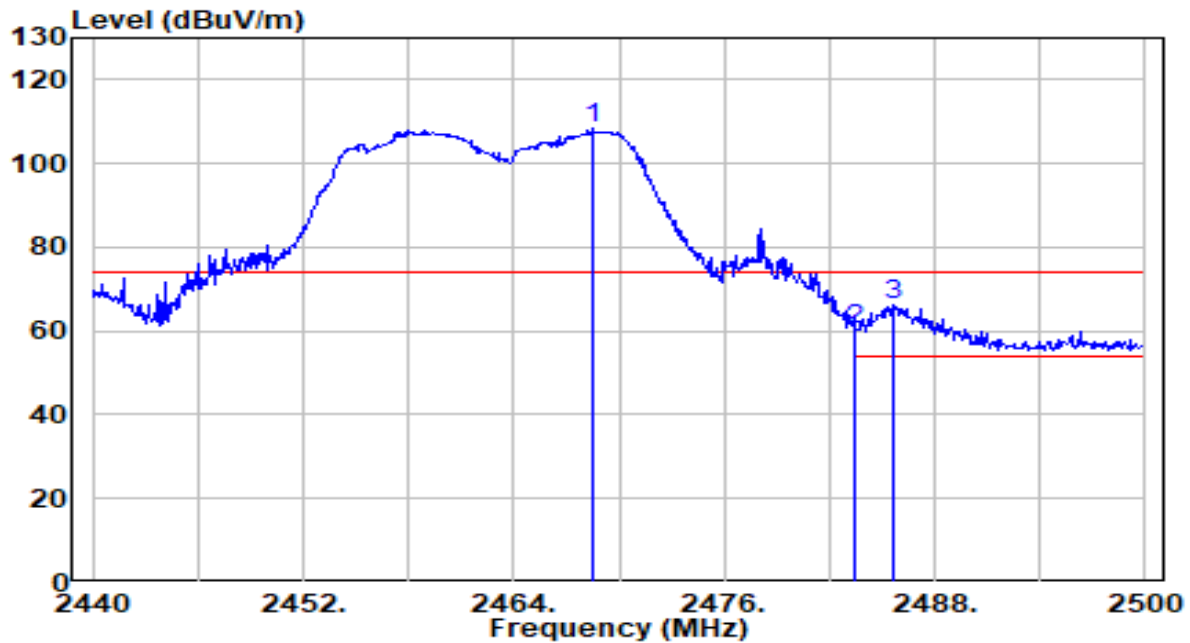


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.500	77.52	30.86	108.38	N/A	N/A	230	300	Peak
2	2483.500	29.37	30.91	60.28	-13.72	74.00	230	300	Peak
3	* 2485.660	35.52	30.92	66.44	-7.56	74.00	230	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

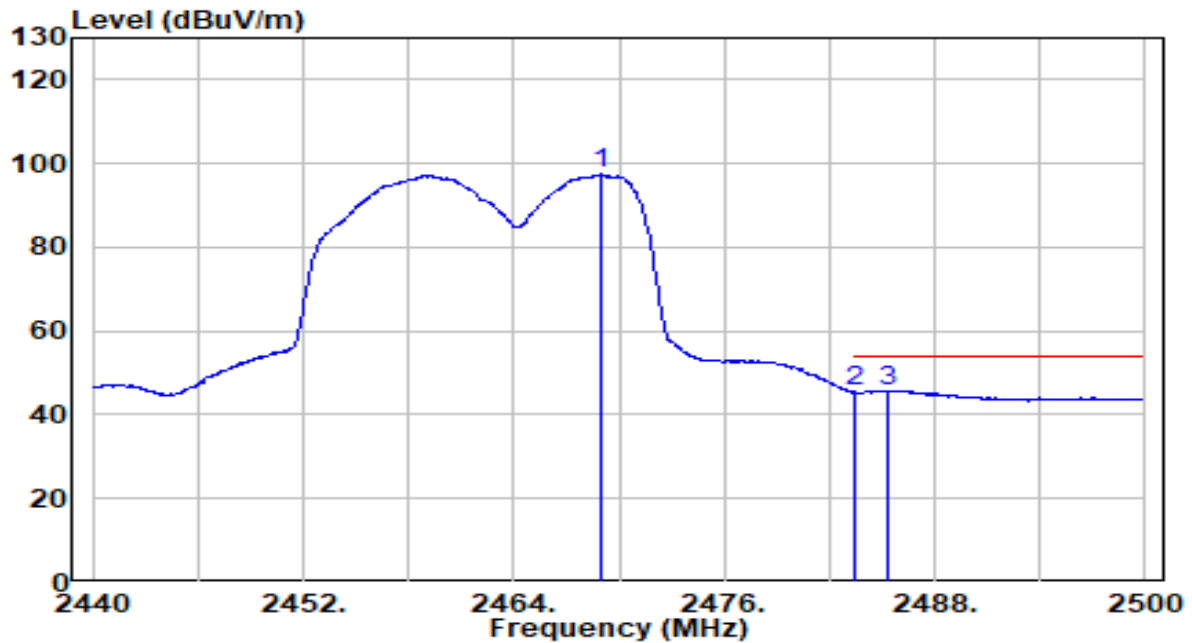


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.980	66.52	30.86	97.38	N/A	N/A	230	300	Average
2	2483.500	14.54	30.91	45.45	-8.55	54.00	230	300	Average
3	* 2485.360	14.88	30.92	45.80	-8.20	54.00	230	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHzz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

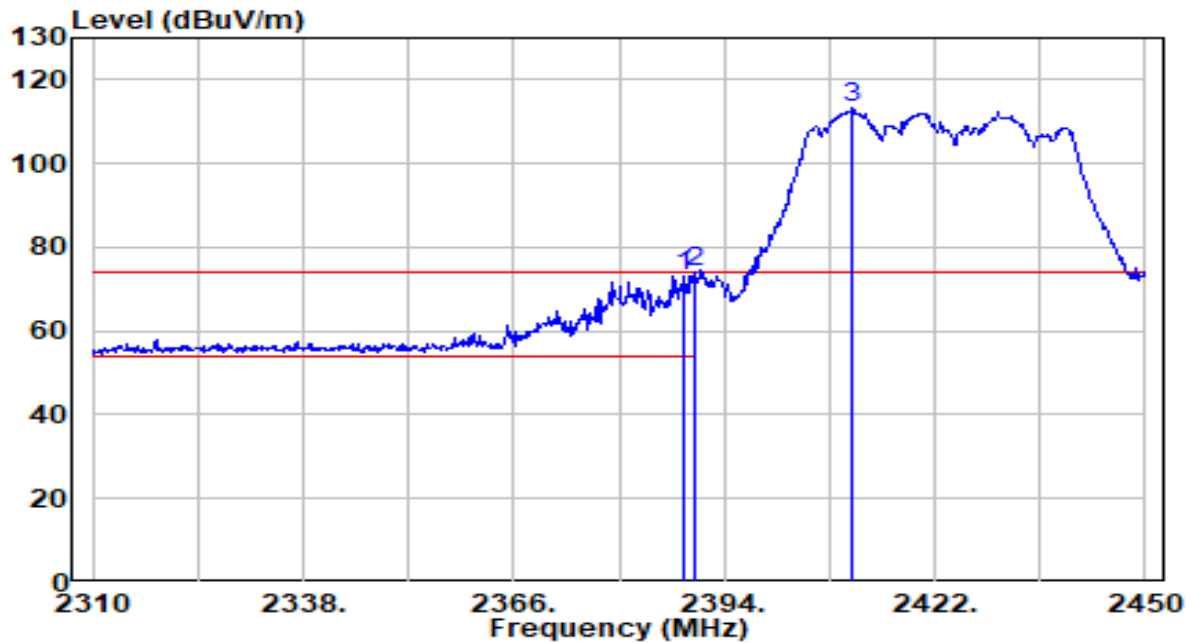


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.540	42.57	30.61	73.18	-0.82	74.00	225	15	Peak
2	* 2390.000	43.22	30.61	73.84	-0.16	74.00	225	15	Peak
3	2411.080	82.63	30.67	113.29	N/A	N/A	225	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

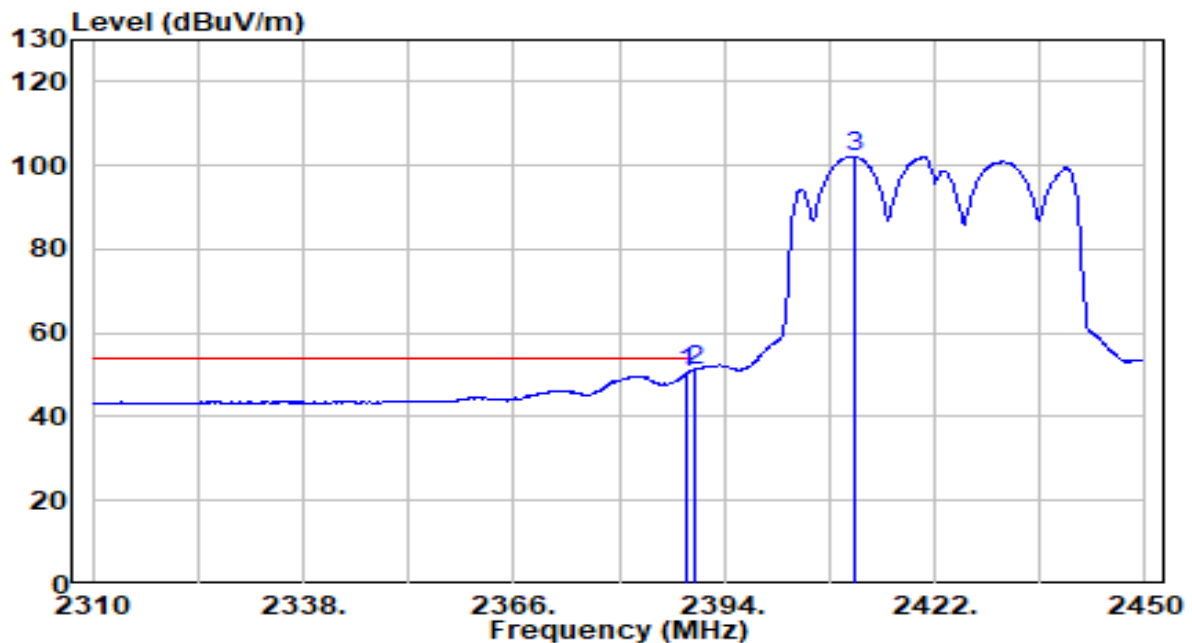


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.960	19.77	30.61	50.39	-3.61	54.00	225	15	Average
2	*	2390.000	20.59	30.61	51.20	-2.80	54.00	225	15	Average
3		2411.220	71.52	30.67	102.19	N/A	N/A	225	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHzz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

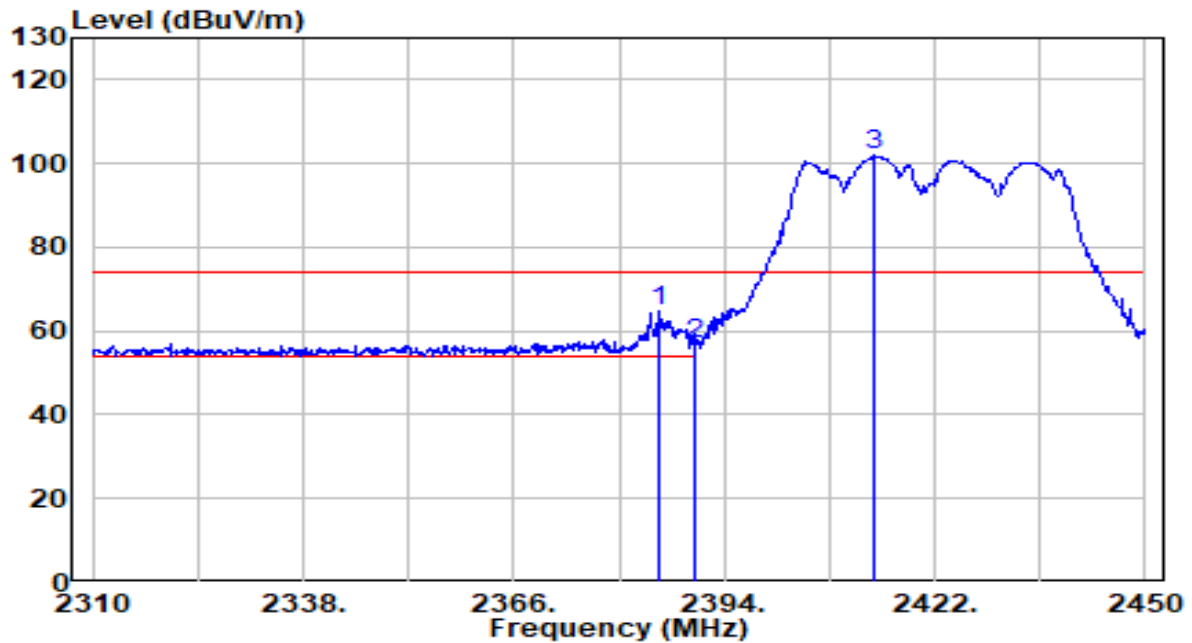


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.180	34.27	30.61	64.87	-9.13	74.00	120	95	Peak
2		2390.000	26.50	30.61	57.12	-16.88	74.00	120	95	Peak
3		2414.020	71.16	30.68	101.83	N/A	N/A	120	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

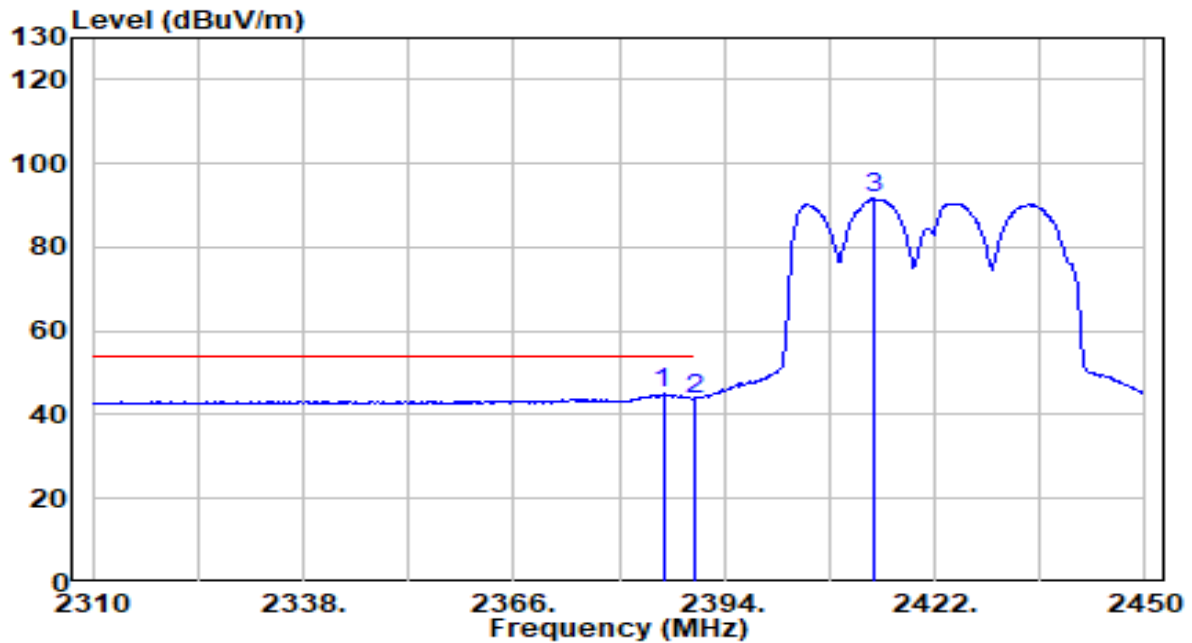


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.880	14.31	30.61	44.92	-9.08	54.00	120	95	Average
2		2390.000	13.10	30.61	43.72	-10.28	54.00	120	95	Average
3		2414.020	60.84	30.68	91.51	N/A	N/A	120	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHzz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

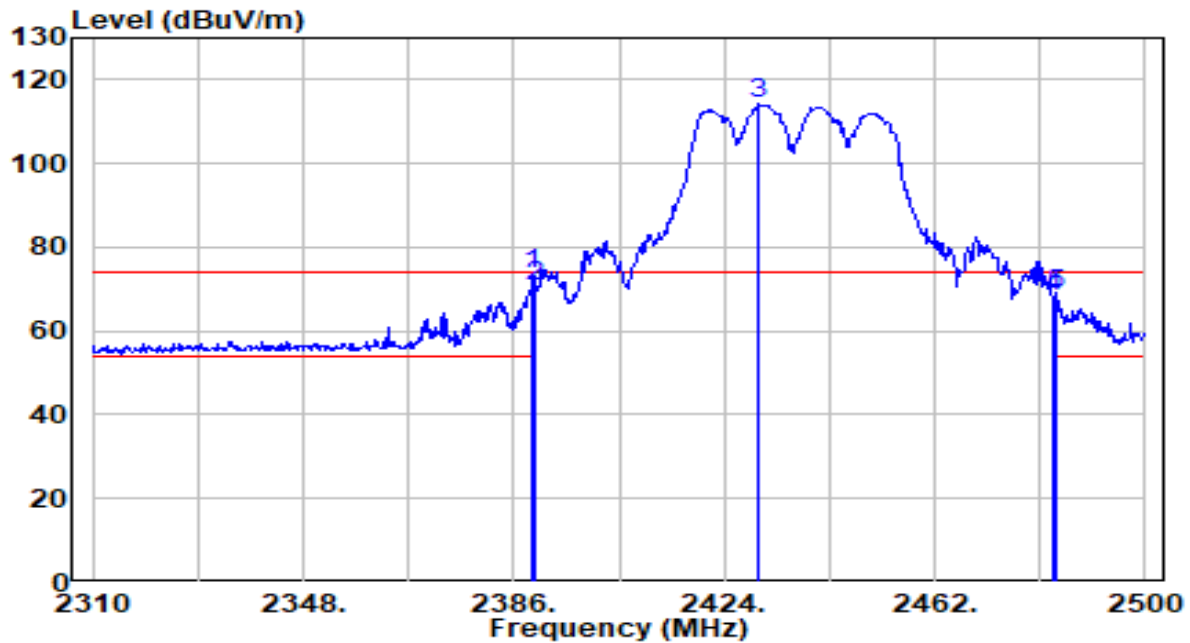


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.420	43.21	30.61	73.82	-0.18	74.00	120	15	Peak
2		2390.000	39.90	30.61	70.52	-3.48	74.00	120	15	Peak
3		2430.270	83.44	30.73	114.18	N/A	N/A	120	15	Peak
4		2483.500	37.09	30.91	68.00	-6.00	74.00	120	15	Peak
5		2484.040	37.52	30.92	68.44	-5.56	74.00	120	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

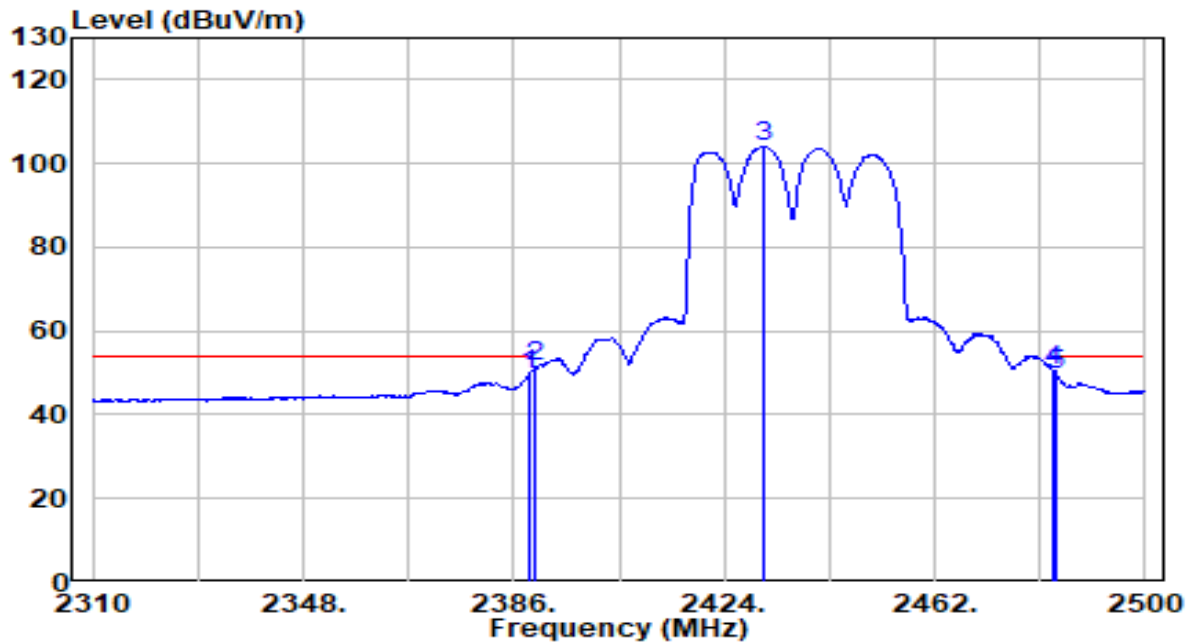


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	19.18	30.61	49.79	-4.21	54.00	120	15	Average
2	*	2390.000	20.82	30.61	51.43	-2.57	54.00	120	15	Average
3		2431.220	73.29	30.73	104.02	N/A	N/A	120	15	Average
4		2483.500	19.69	30.91	50.61	-3.39	54.00	120	15	Average
5		2484.040	18.70	30.92	49.62	-4.38	54.00	120	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

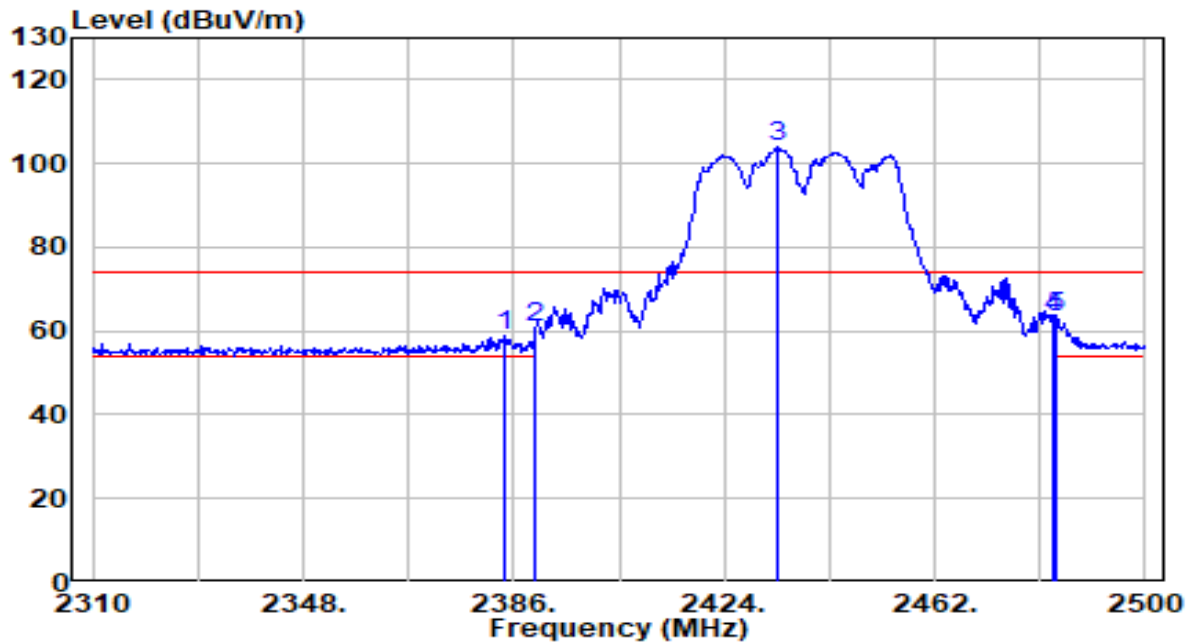


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	28.06	30.61	58.67	-15.33	74.00	115	95	Peak
2	2390.000	30.05	30.61	60.67	-13.33	74.00	115	95	Peak
3	2433.500	73.08	30.74	103.82	N/A	N/A	115	95	Peak
4	2483.500	32.16	30.91	63.07	-10.93	74.00	115	95	Peak
5	* 2484.040	32.46	30.92	63.37	-10.63	74.00	115	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

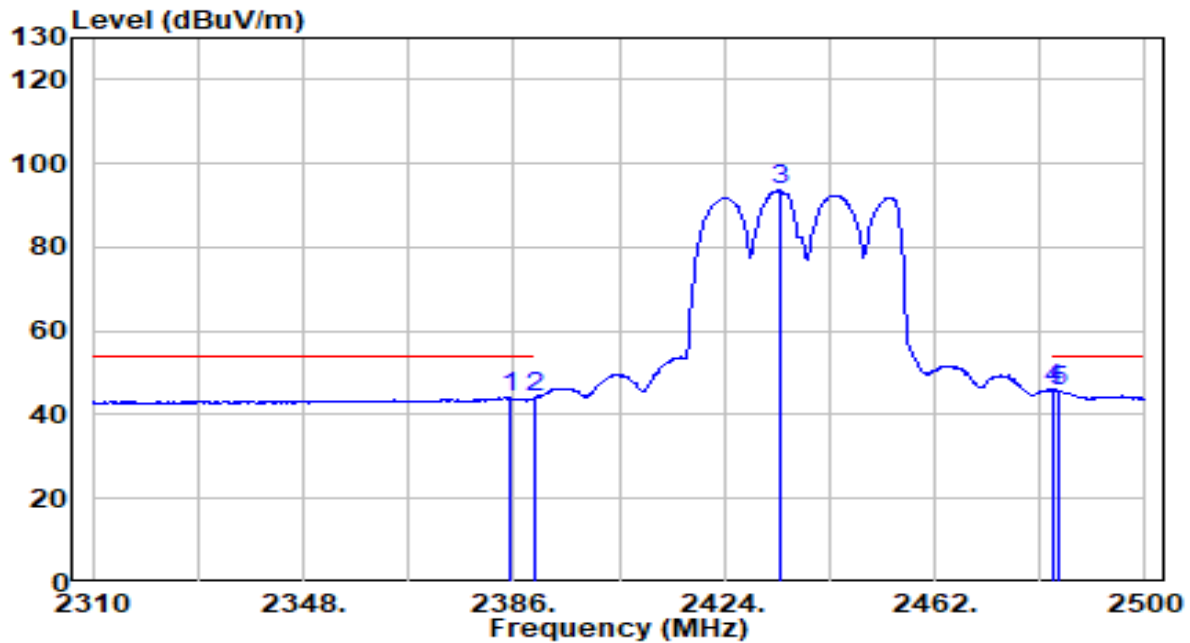


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	13.42	30.61	44.03	-9.97	54.00	115	95	Average
2	2390.000	13.40	30.61	44.01	-9.99	54.00	115	95	Average
3	2434.260	62.73	30.75	93.48	N/A	N/A	115	95	Average
4	* 2483.500	15.16	30.91	46.07	-7.93	54.00	115	95	Average
5	2484.420	14.90	30.92	45.82	-8.18	54.00	115	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

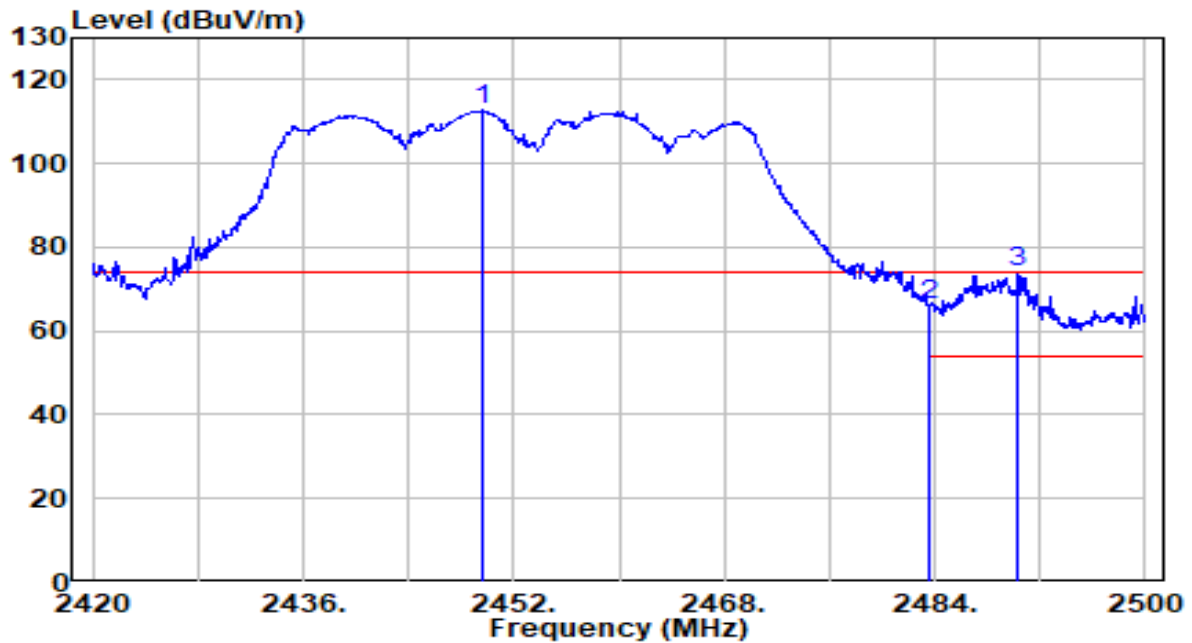


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.600	82.28	30.80	113.08	N/A	N/A	155	345	Peak
2	2483.500	35.09	30.91	66.01	-7.99	74.00	155	345	Peak
3	* 2490.320	42.91	30.94	73.85	-0.15	74.00	155	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

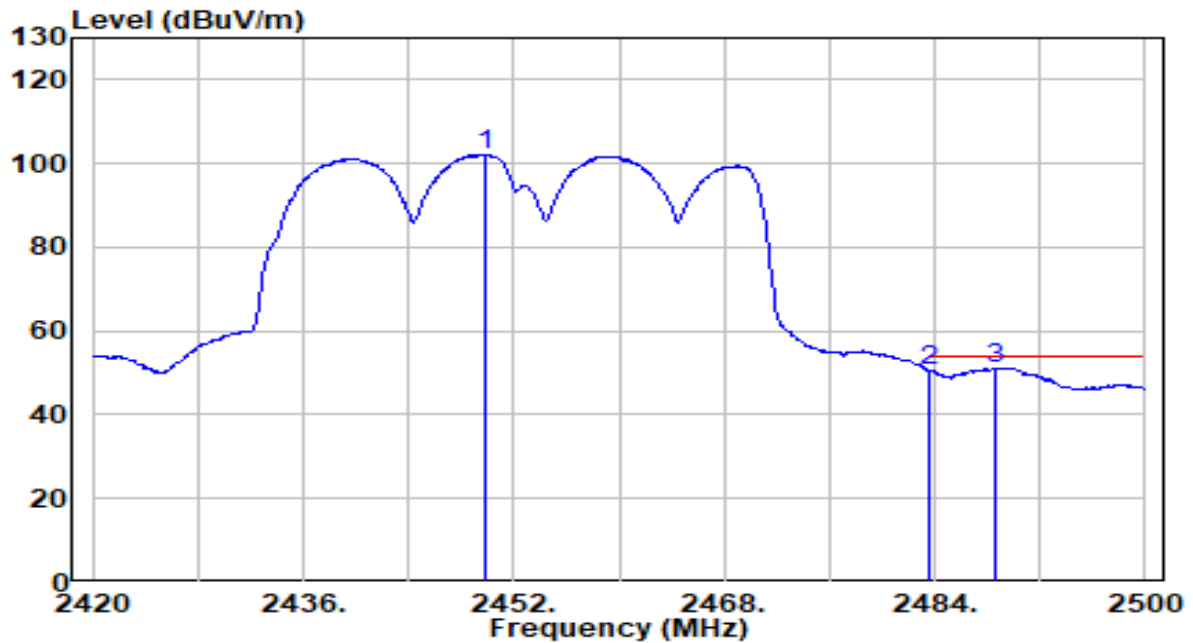


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.760	71.35	30.80	102.15	N/A	N/A	155	345	Average
2	2483.500	19.78	30.91	50.70	-3.30	54.00	155	345	Average
3	* 2488.640	20.28	30.93	51.21	-2.79	54.00	155	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

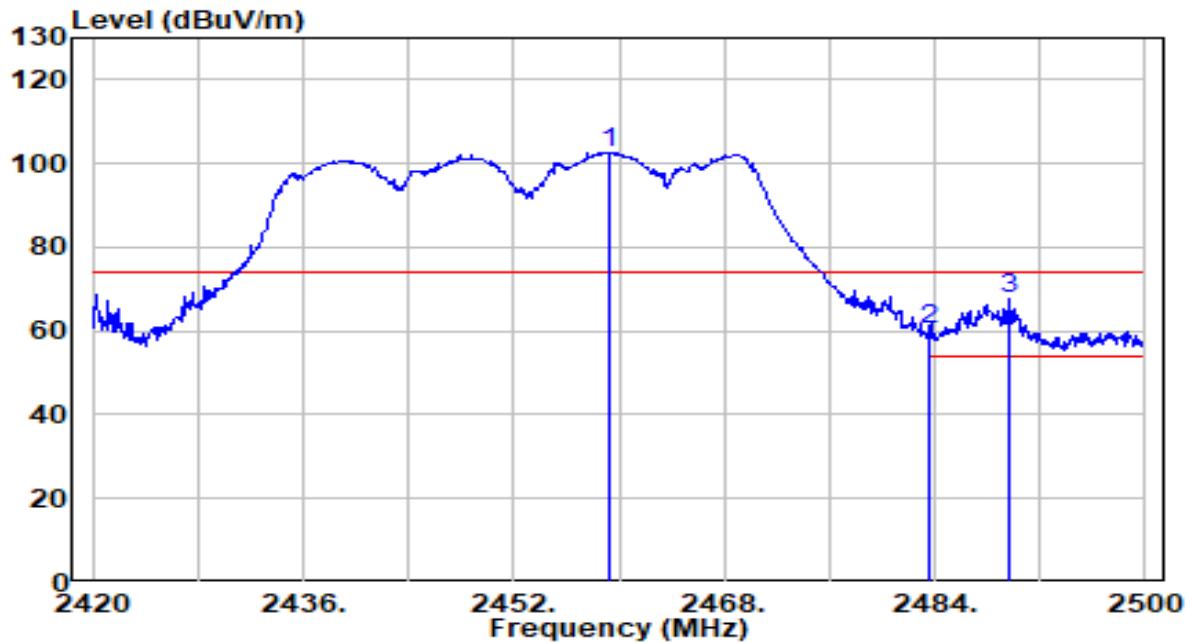


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.360	71.72	30.83	102.55	N/A	N/A	225	295	Peak
2	2483.500	29.36	30.91	60.27	-13.73	74.00	225	295	Peak
3	* 2489.600	37.00	30.93	67.93	-6.07	74.00	225	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHzz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

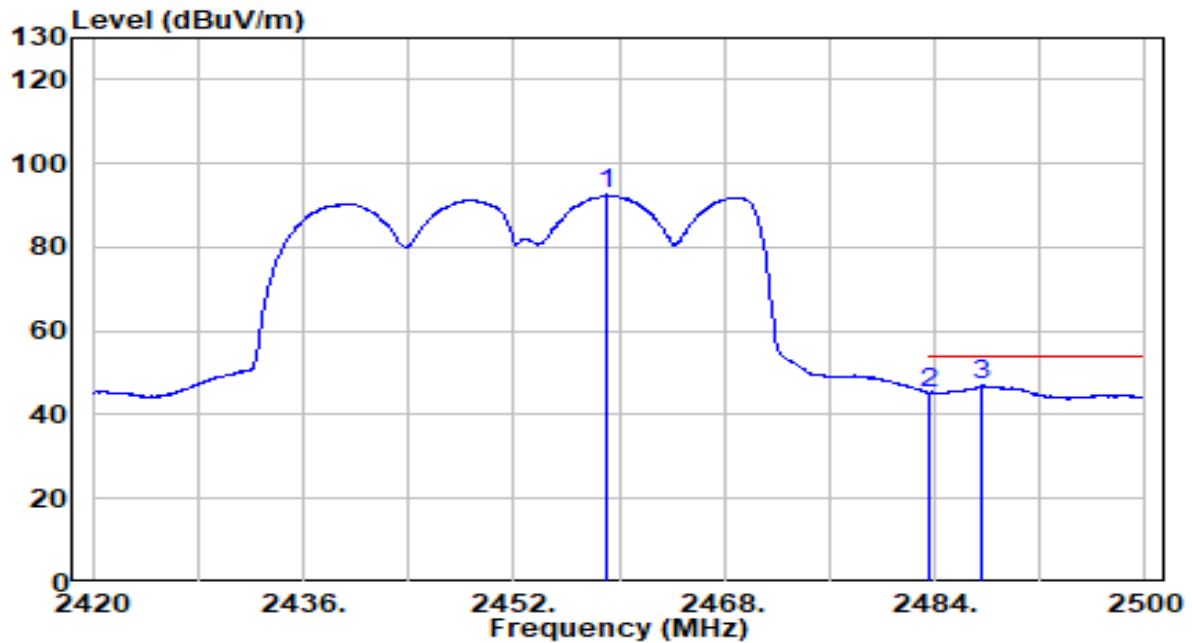


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.120	61.65	30.83	92.48	N/A	N/A	225	295	Average
2	2483.500	14.30	30.91	45.21	-8.79	54.00	225	295	Average
3	* 2487.600	16.07	30.93	46.99	-7.01	54.00	225	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

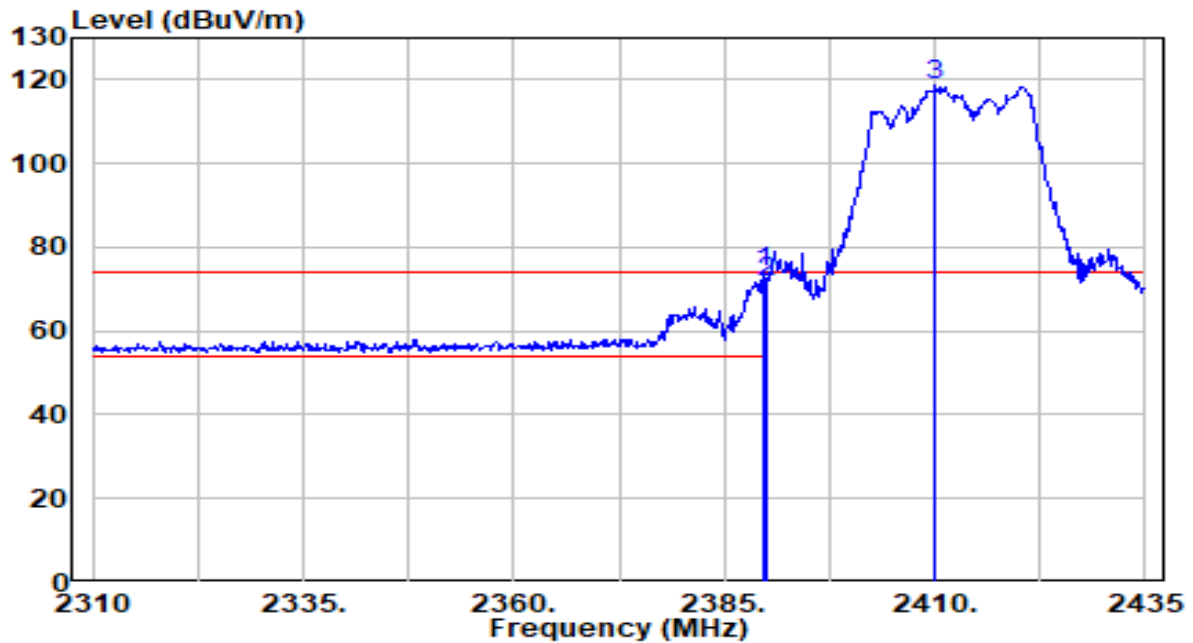


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.625	43.24	30.61	73.85	-0.15	74.00	225	15	Peak
2		2390.000	41.19	30.61	71.80	-2.20	74.00	225	15	Peak
3		2410.000	87.99	30.66	118.66	N/A	N/A	225	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

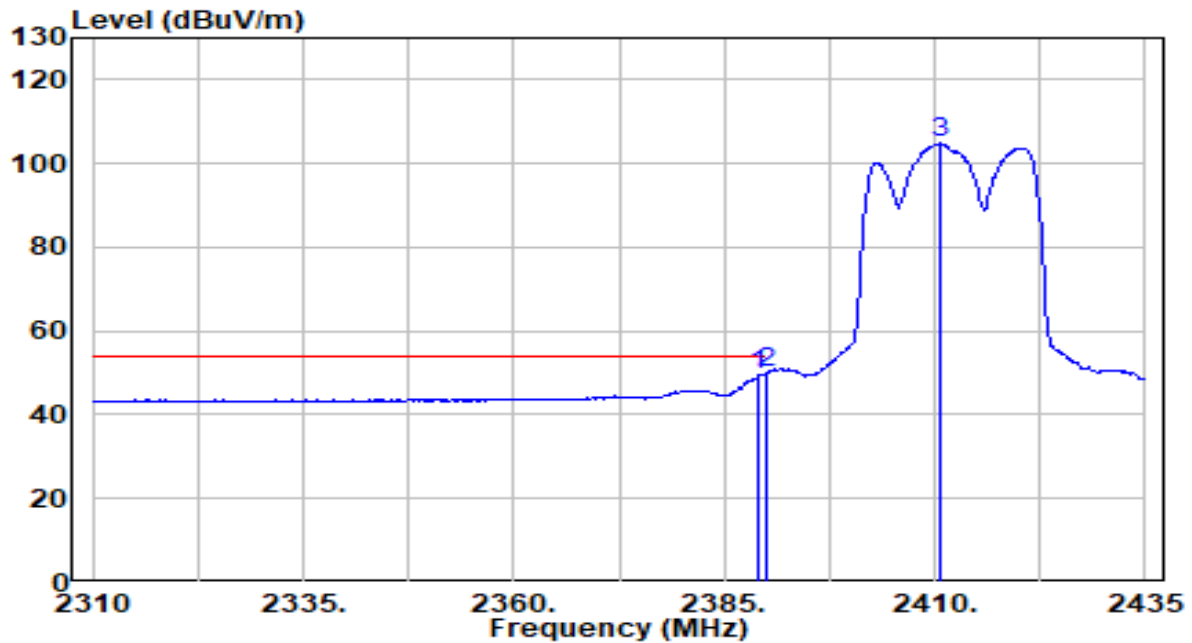


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	18.82	30.61	49.43	-4.57	54.00	225	15	Average
2	*	2390.000	19.43	30.61	50.04	-3.96	54.00	225	15	Average
3		2410.625	74.21	30.66	104.87	N/A	N/A	225	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

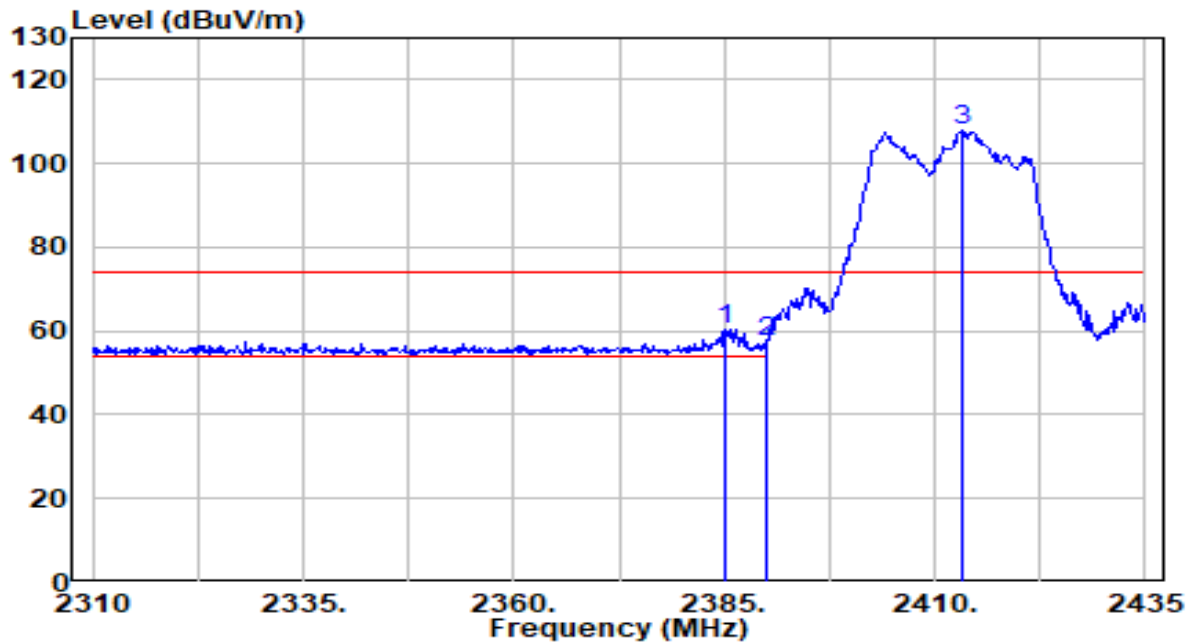


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.000	29.95	30.61	60.55	-13.45	74.00	120	95	Peak
2		2390.000	26.81	30.61	57.43	-16.57	74.00	120	95	Peak
3		2413.250	77.18	30.67	107.85	N/A	N/A	120	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 1_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

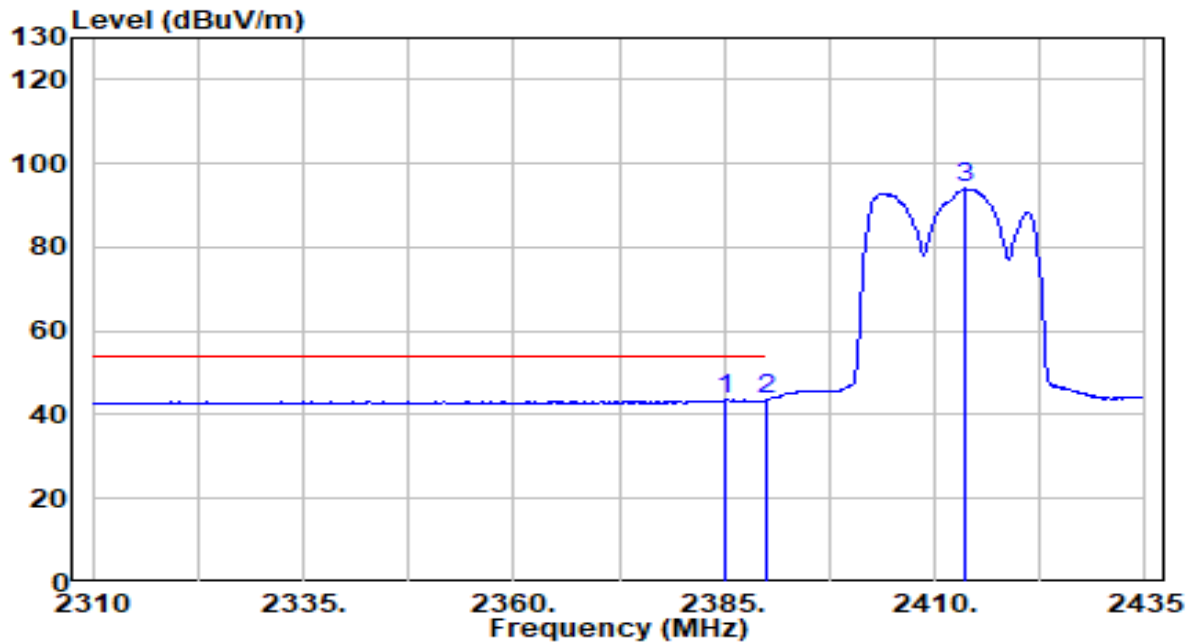


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.250	12.97	30.61	43.58	-10.42	54.00	120	95	Average
2	*	2390.000	13.12	30.61	43.73	-10.27	54.00	120	95	Average
3		2413.500	63.29	30.67	93.97	N/A	N/A	120	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

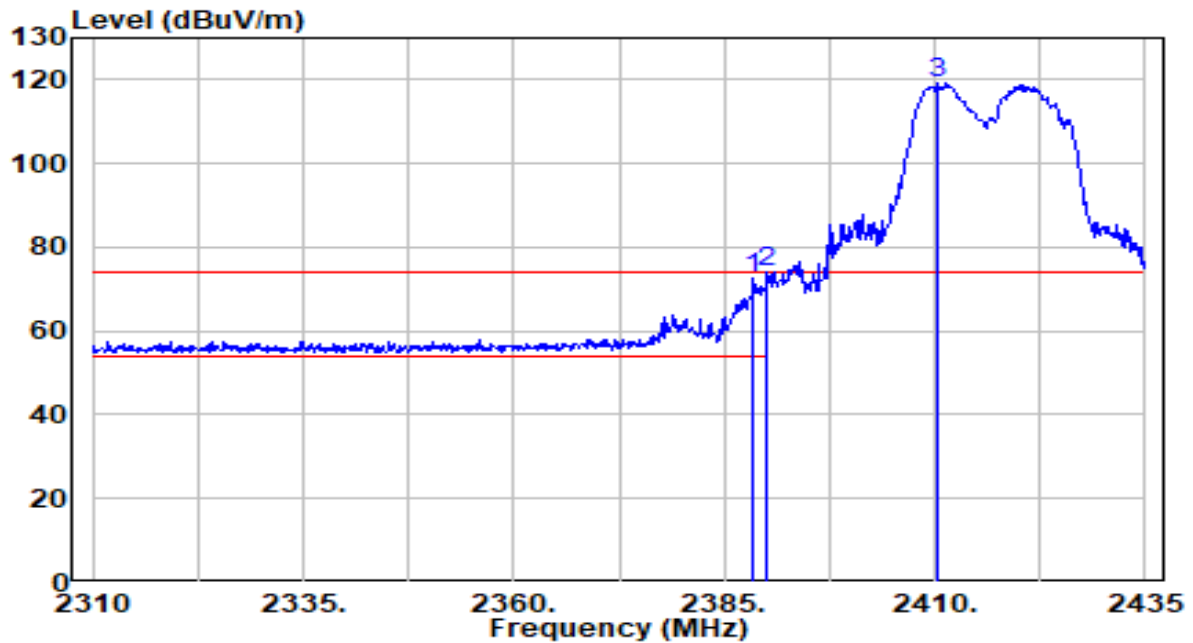


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.500	41.76	30.61	72.37	-1.63	74.00	230	10	Peak
2	*	2390.000	43.28	30.61	73.90	-0.10	74.00	230	10	Peak
3		2410.375	88.42	30.66	119.08	N/A	N/A	230	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

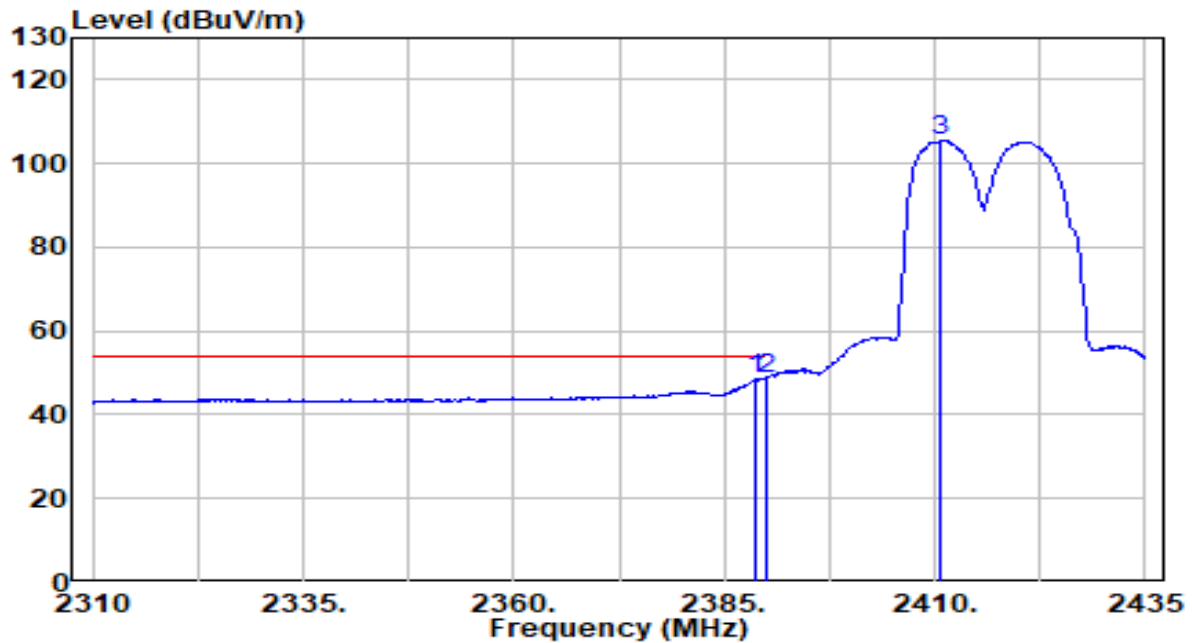


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.625	17.75	30.61	48.36	-5.64	54.00	230	10	Average
2	*	2390.000	18.15	30.61	48.76	-5.24	54.00	230	10	Average
3		2410.625	74.85	30.66	105.51	N/A	N/A	230	10	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

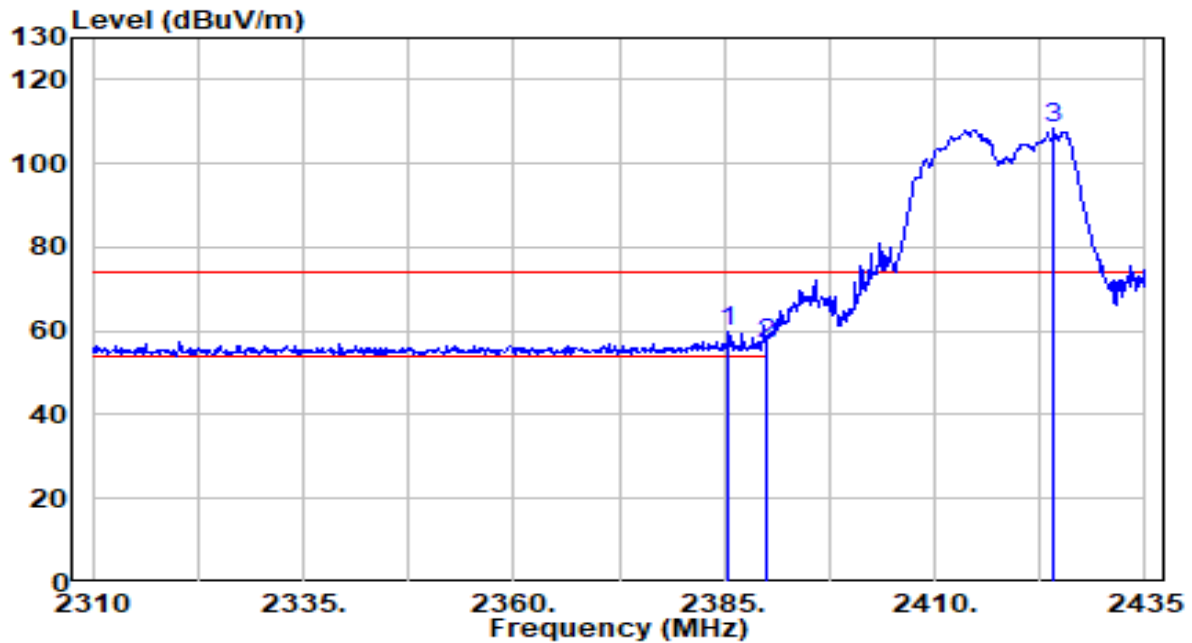


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.500	29.30	30.61	59.91	-14.09	74.00	120	95	Peak
2		2390.000	26.24	30.61	56.85	-17.15	74.00	120	95	Peak
3		2424.125	77.53	30.71	108.24	N/A	N/A	120	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

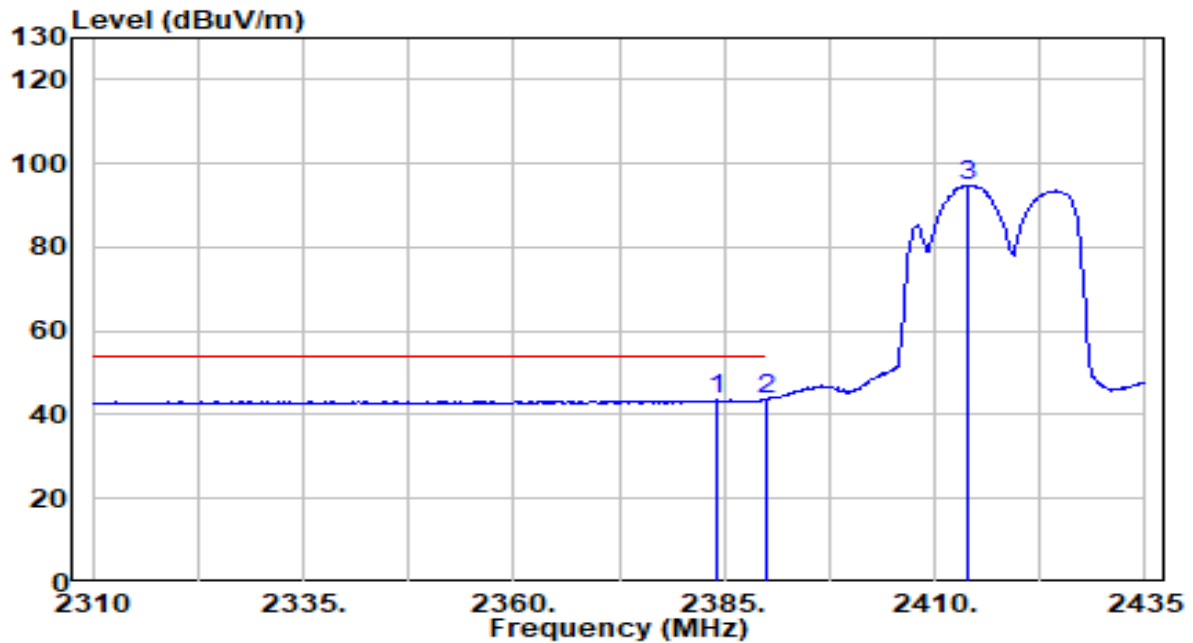


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.250	12.92	30.61	43.52	-10.48	54.00	120	95	Average
2	*	2390.000	12.99	30.61	43.60	-10.40	54.00	120	95	Average
3		2414.000	64.23	30.68	94.91	N/A	N/A	120	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

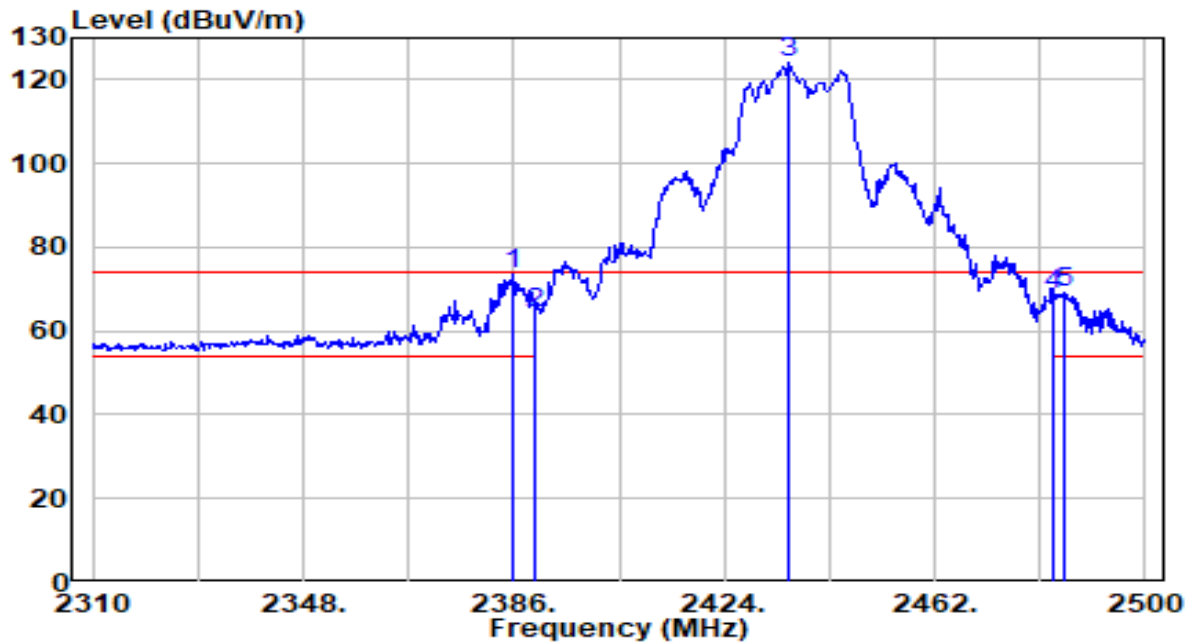


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.810	43.06	30.61	73.67	-0.33	74.00	120	10	Peak
2		2390.000	33.66	30.61	64.27	-9.73	74.00	120	10	Peak
3		2435.400	93.57	30.75	124.32	N/A	N/A	120	10	Peak
4		2483.500	37.68	30.91	68.59	-5.41	74.00	120	10	Peak
5		2485.370	38.12	30.92	69.04	-4.96	74.00	120	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

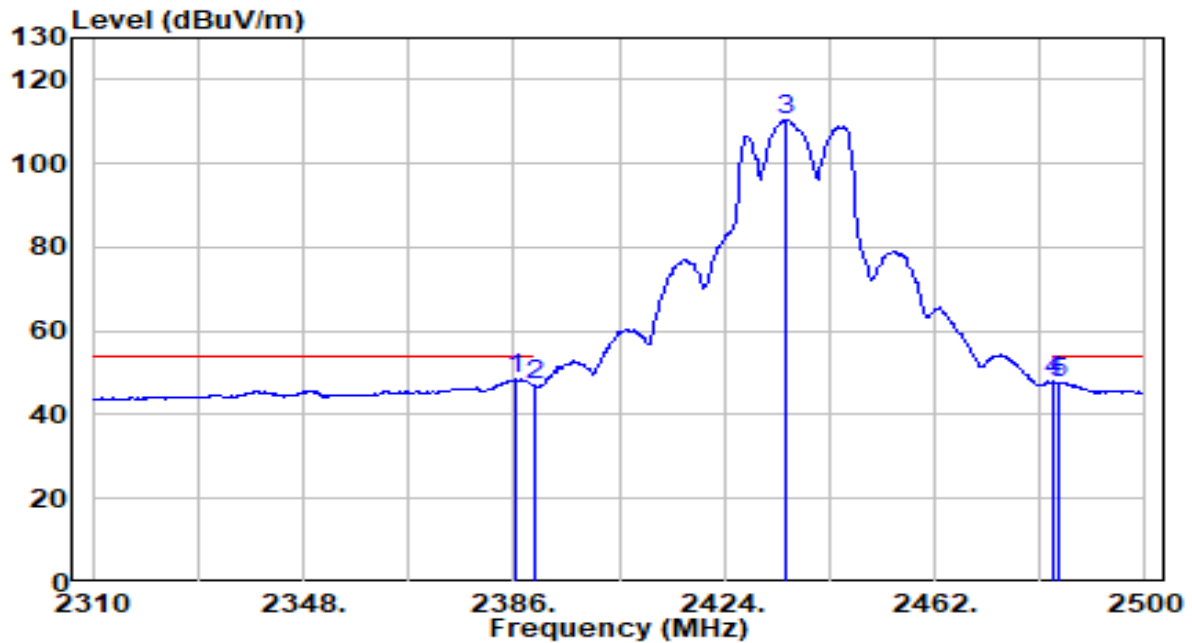


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.380	17.78	30.61	48.39	-5.61	54.00	120	10	Average
2		2390.000	16.24	30.61	46.86	-7.14	54.00	120	10	Average
3		2435.210	79.70	30.75	110.45	N/A	N/A	120	10	Average
4		2483.500	16.95	30.91	47.87	-6.13	54.00	120	10	Average
5		2484.610	16.89	30.92	47.81	-6.19	54.00	120	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz-TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

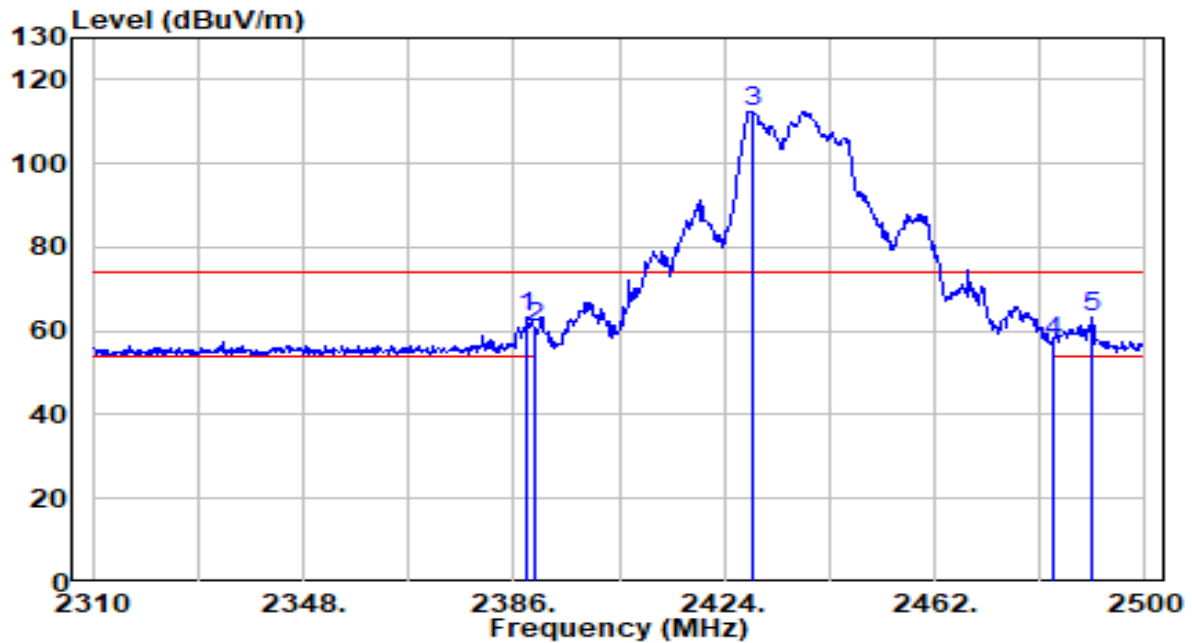


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.280	32.91	30.61	63.52	-10.48	74.00	110	95	Peak
2		2390.000	30.03	30.61	60.65	-13.35	74.00	110	95	Peak
3		2429.130	81.82	30.73	112.55	N/A	N/A	110	95	Peak
4		2483.500	26.46	30.91	57.37	-16.63	74.00	110	95	Peak
5		2490.310	32.26	30.94	63.20	-10.80	74.00	110	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

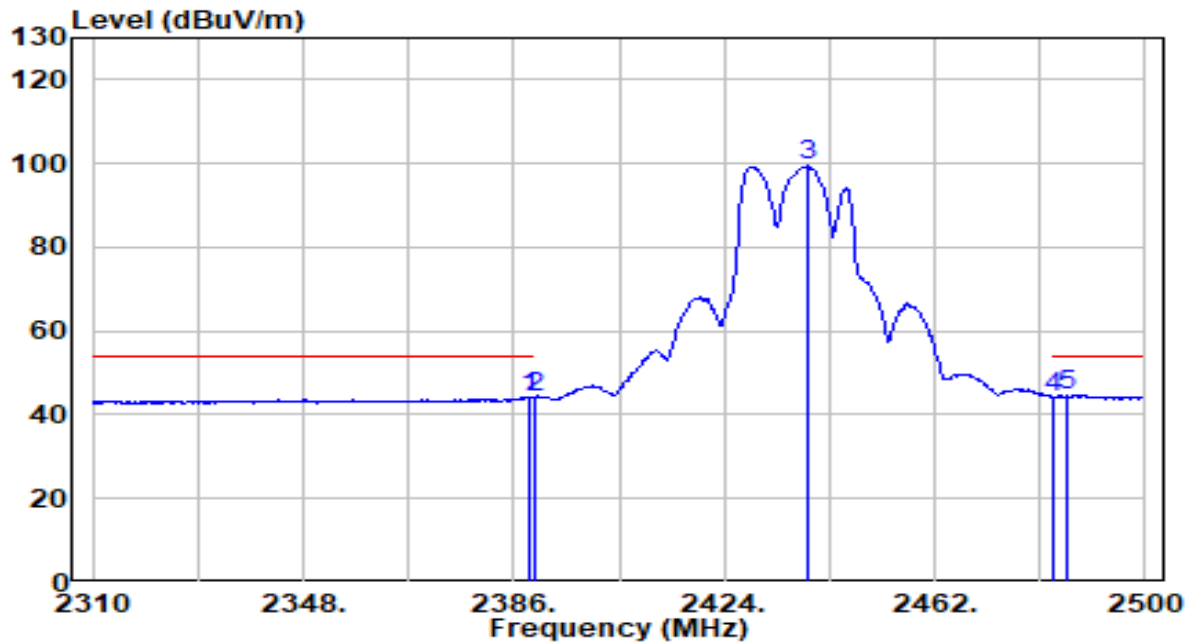


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	13.61	30.61	44.22	-9.78	54.00	110	95	Average
2	2390.000	13.53	30.61	44.14	-9.86	54.00	110	95	Average
3	2439.010	68.59	30.76	99.35	N/A	N/A	110	95	Average
4	2483.500	13.43	30.91	44.35	-9.65	54.00	110	95	Average
5	* 2485.940	13.79	30.92	44.72	-9.28	54.00	110	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

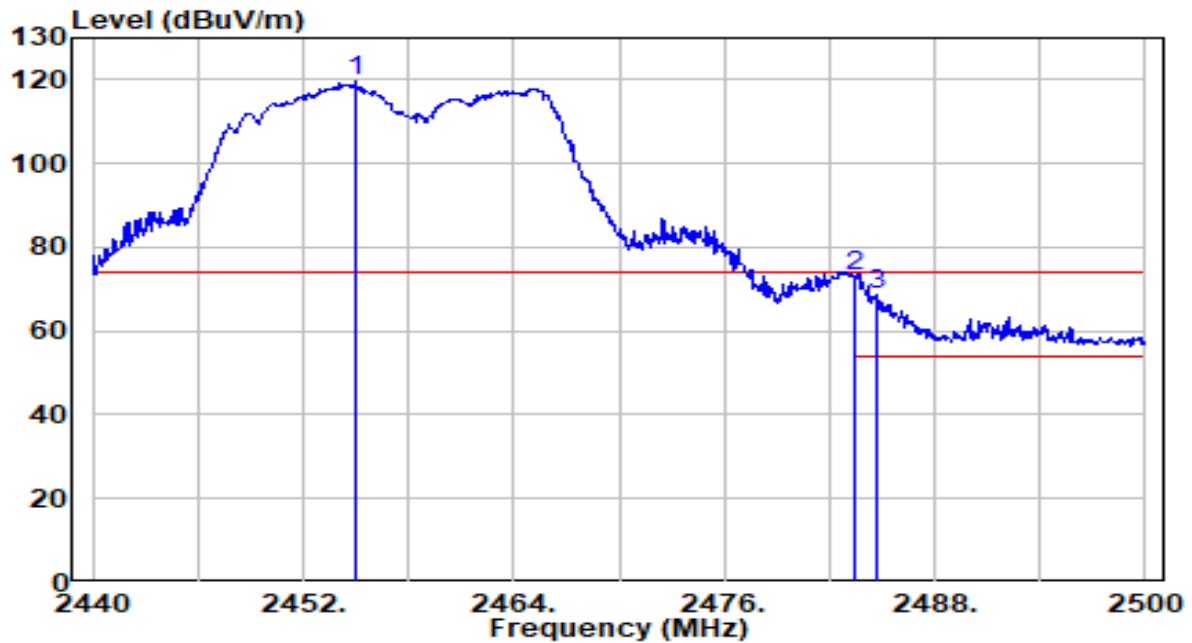


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.940	88.70	30.82	119.52	N/A	N/A	155	345	Peak
2	*	2483.500	42.30	30.91	73.22	-0.78	74.00	155	345	Peak
3		2484.700	37.85	30.92	68.77	-5.23	74.00	155	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

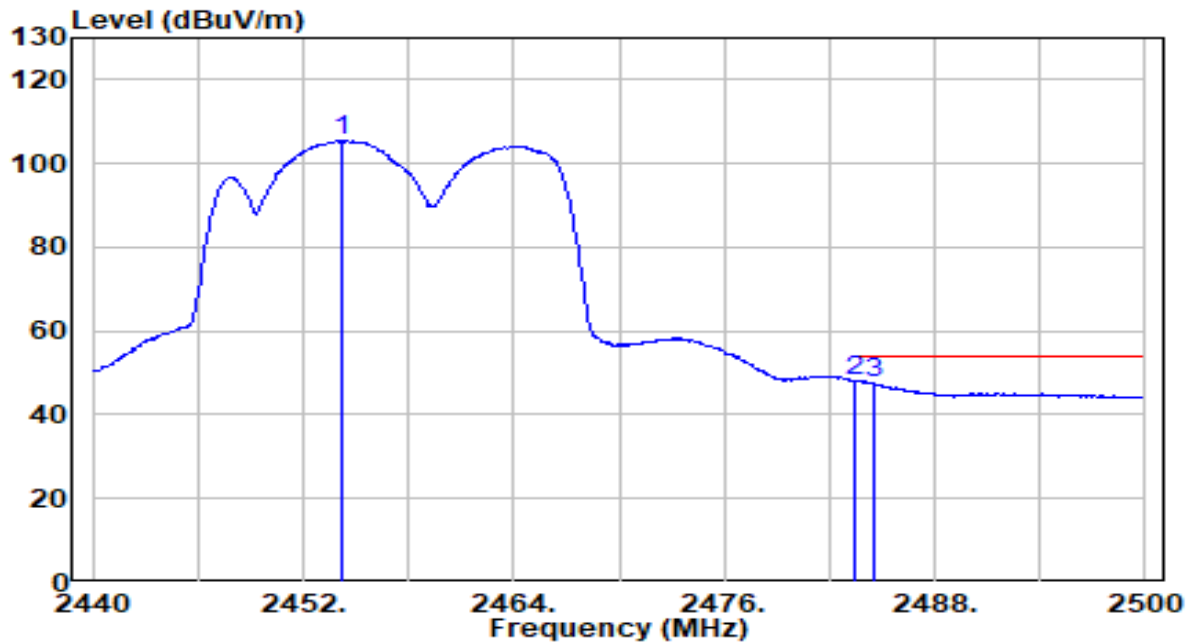


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.220	74.58	30.81	105.40	N/A	N/A	155	345	Average
2	*	2483.500	17.32	30.91	48.23	-5.77	54.00	155	345	Average
3		2484.520	16.60	30.92	47.52	-6.48	54.00	155	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

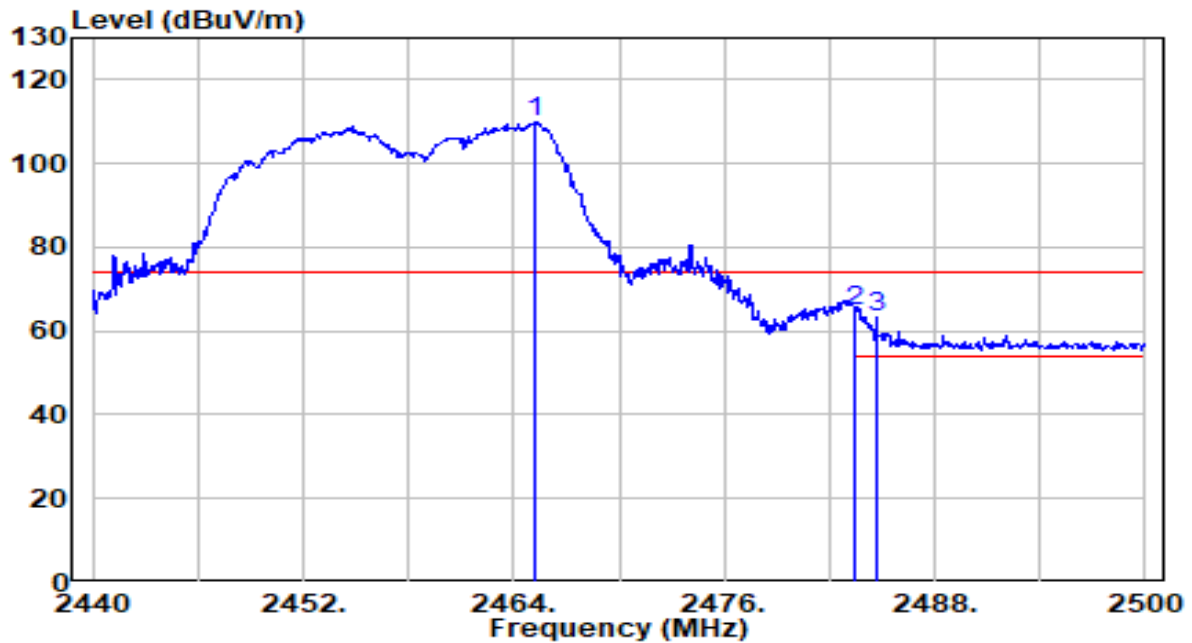


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.200	78.93	30.85	109.78	N/A	N/A	230	300	Peak
2	* 2483.500	33.78	30.91	64.69	-9.31	74.00	230	300	Peak
3	2484.640	32.44	30.92	63.35	-10.65	74.00	230	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

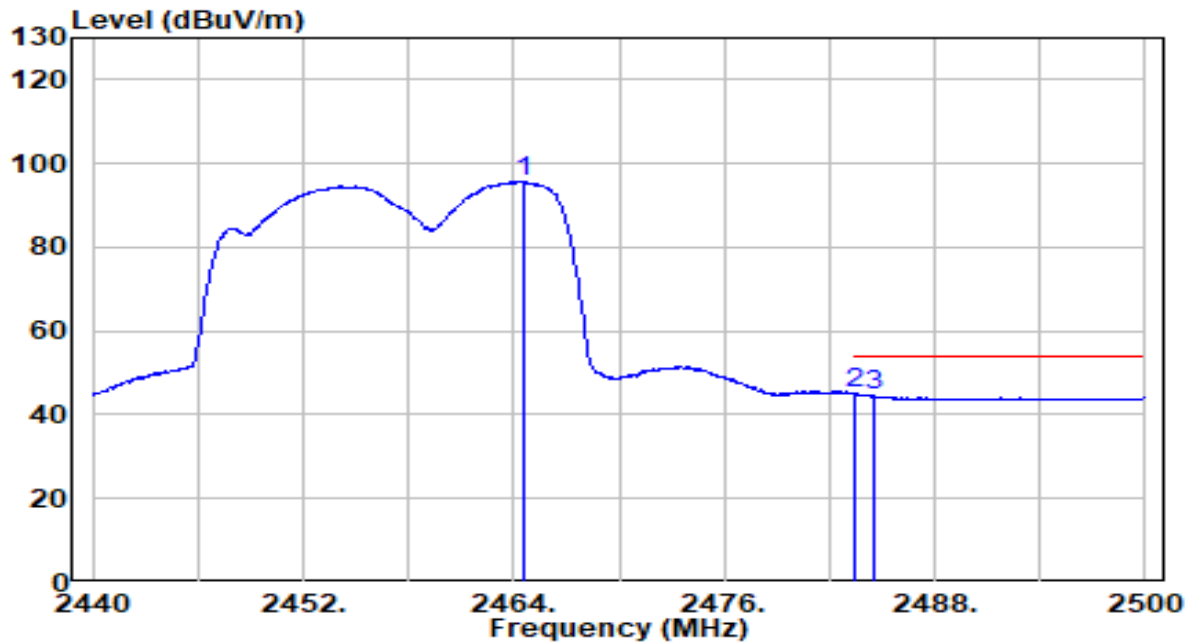


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.540	64.87	30.85	95.72	N/A	N/A	230	300	Average
2	*	2483.500	14.18	30.91	45.09	-8.91	54.00	230	300	Average
3		2484.520	13.55	30.92	44.47	-9.53	54.00	230	300	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

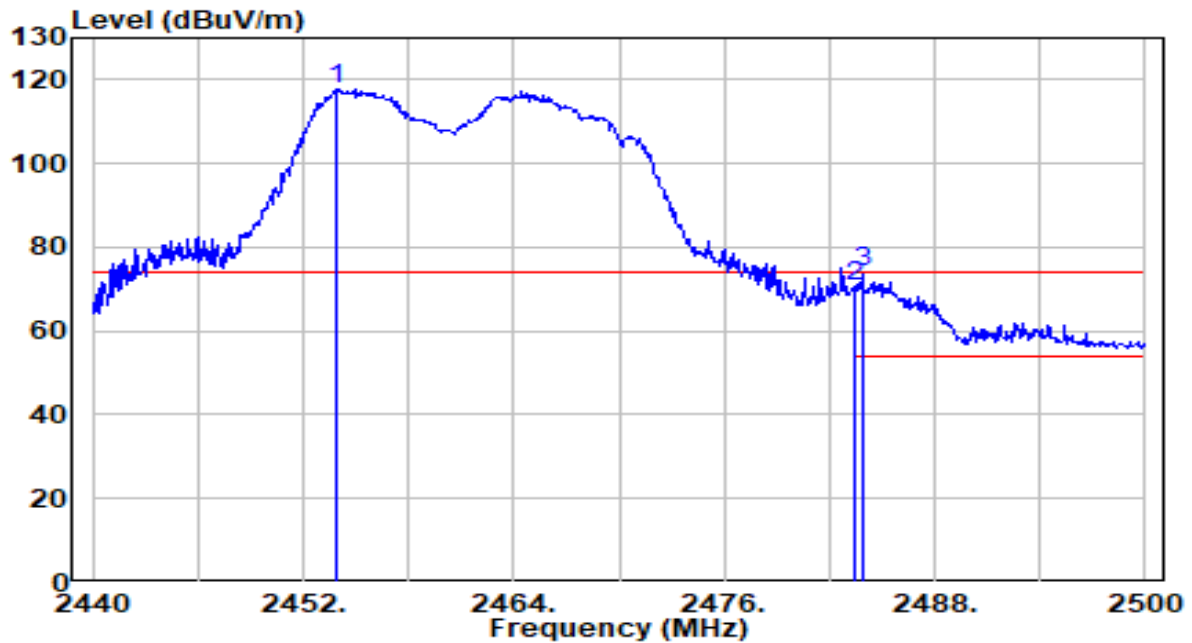


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.920	86.86	30.81	117.67	N/A	N/A	155	350	Peak
2	2483.500	39.49	30.91	70.40	-3.60	74.00	155	350	Peak
3	* 2483.860	42.94	30.91	73.85	-0.15	74.00	155	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

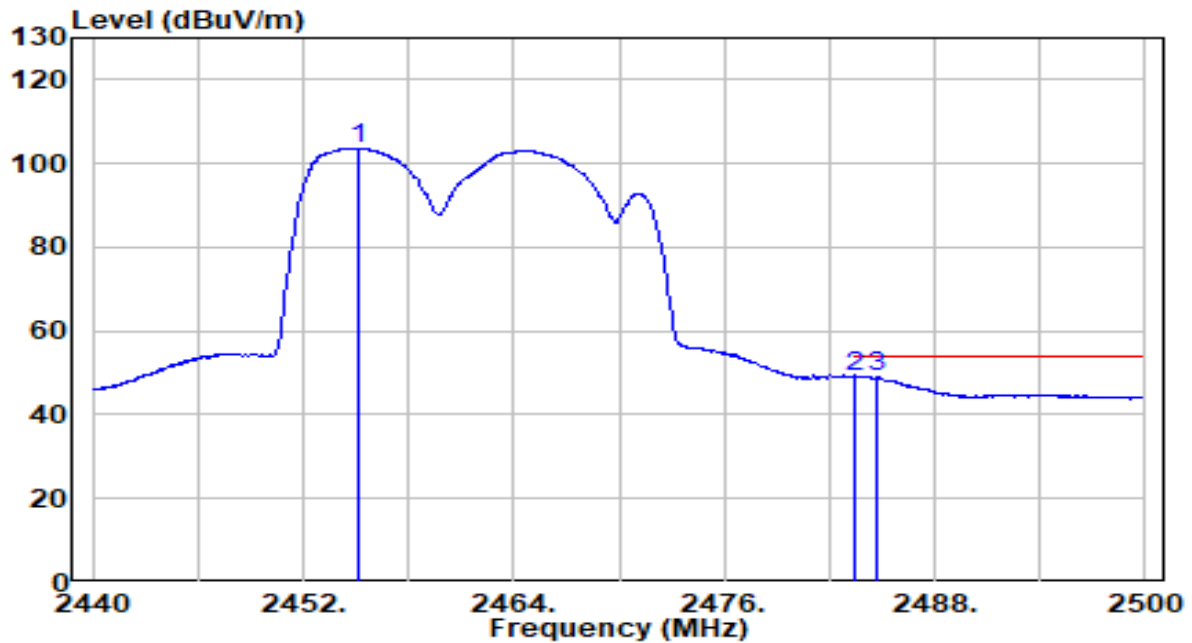


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.180	72.91	30.82	103.72	N/A	N/A	155	350	Average
2	*	2483.500	18.23	30.91	49.14	-4.86	54.00	155	350	Average
3		2484.760	18.03	30.92	48.95	-5.05	54.00	155	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

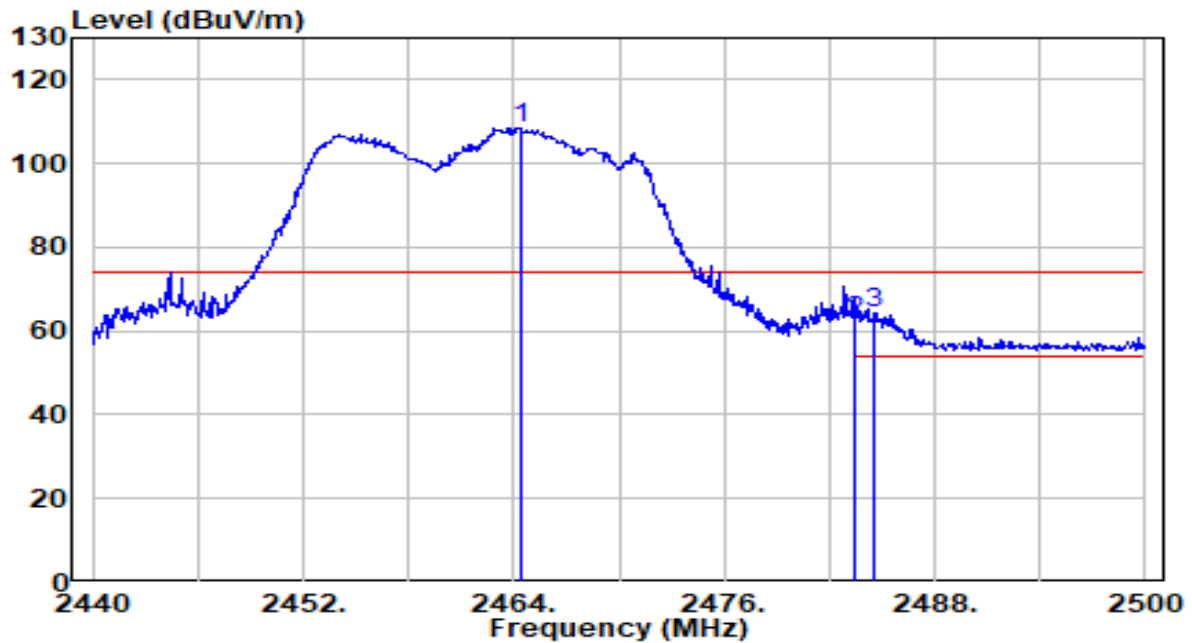


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.360	77.72	30.85	108.57	N/A	N/A	230	295	Peak
2	2483.500	31.62	30.91	62.53	-11.47	74.00	230	295	Peak
3	* 2484.580	33.30	30.92	64.21	-9.79	74.00	230	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHzz_TX_CH 11_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

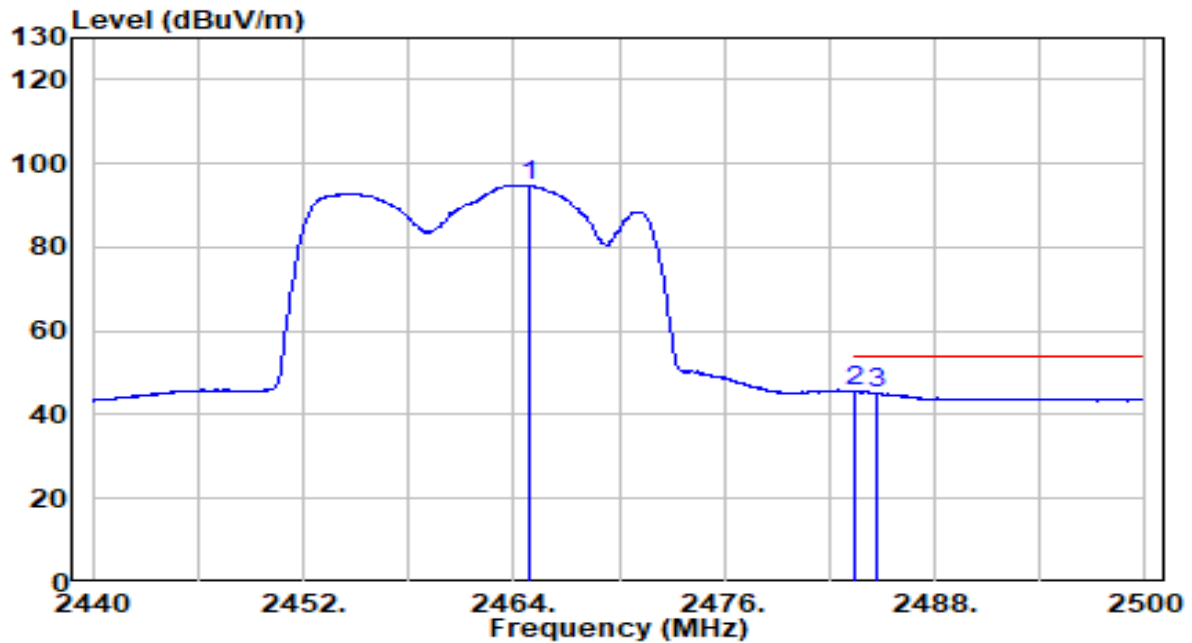


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.900	63.96	30.85	94.81	N/A	N/A	230	295	Average
2	*	2483.500	14.56	30.91	45.48	-8.52	54.00	230	295	Average
3		2484.760	14.40	30.92	45.32	-8.68	54.00	230	295	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

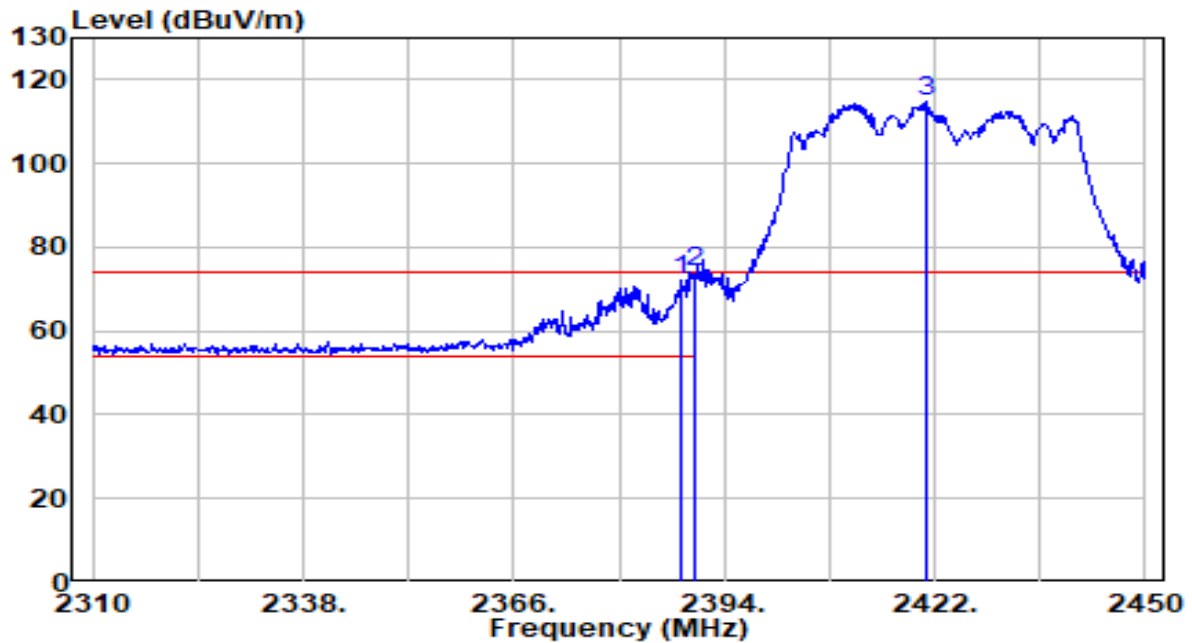


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.260	41.72	30.61	72.33	-1.67	74.00	225	15	Peak
2	* 2390.000	43.31	30.61	73.92	-0.08	74.00	225	15	Peak
3	2420.740	84.19	30.70	114.89	N/A	N/A	225	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHzz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

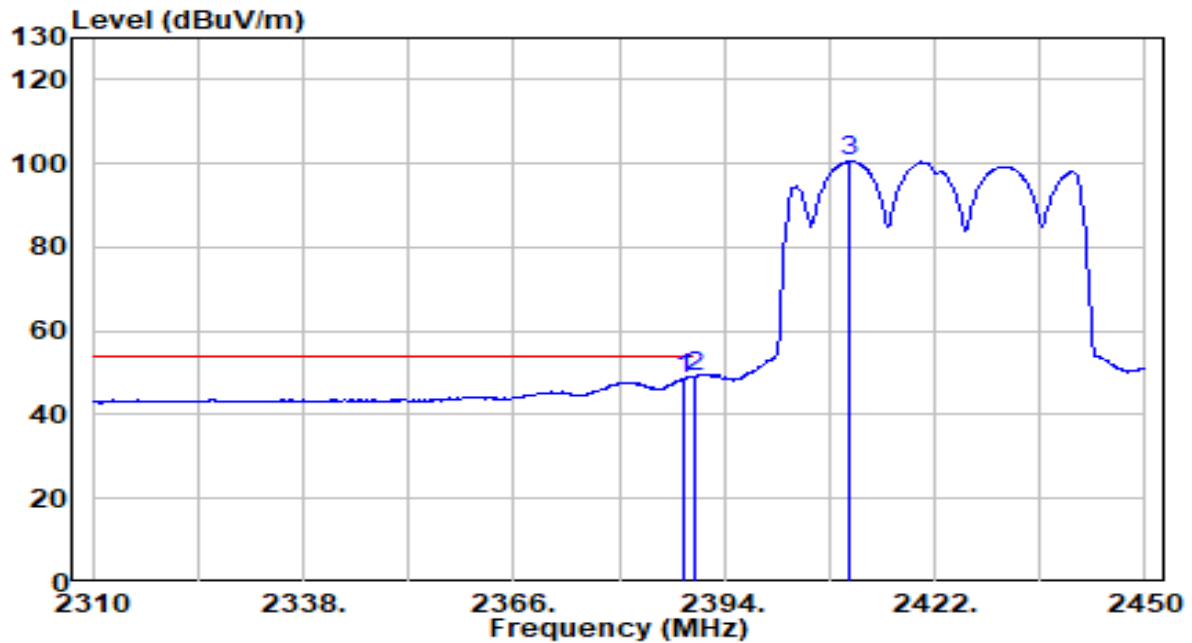


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.540	18.14	30.61	48.75	-5.25	54.00	225	15	Average
2	*	2390.000	18.55	30.61	49.17	-4.83	54.00	225	15	Average
3		2410.660	69.94	30.66	100.60	N/A	N/A	225	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

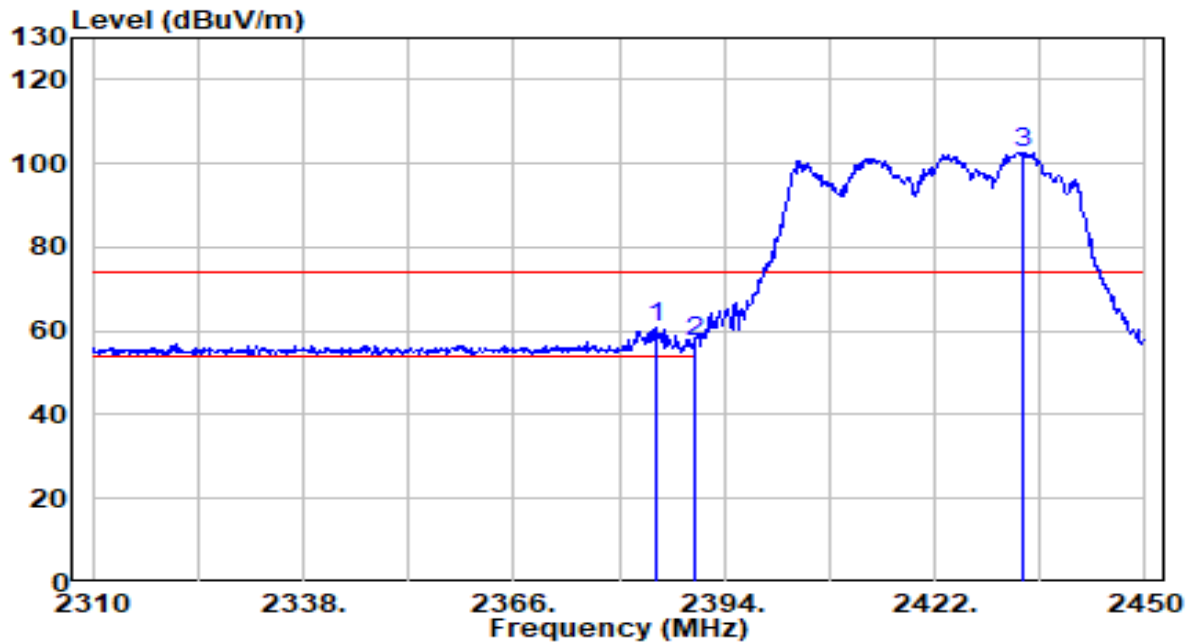


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.040	30.40	30.61	61.01	-12.99	74.00	115	95	Peak
2		2390.000	26.77	30.61	57.38	-16.62	74.00	115	95	Peak
3		2433.900	72.00	30.74	102.74	N/A	N/A	115	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHzz_TX_CH 3_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

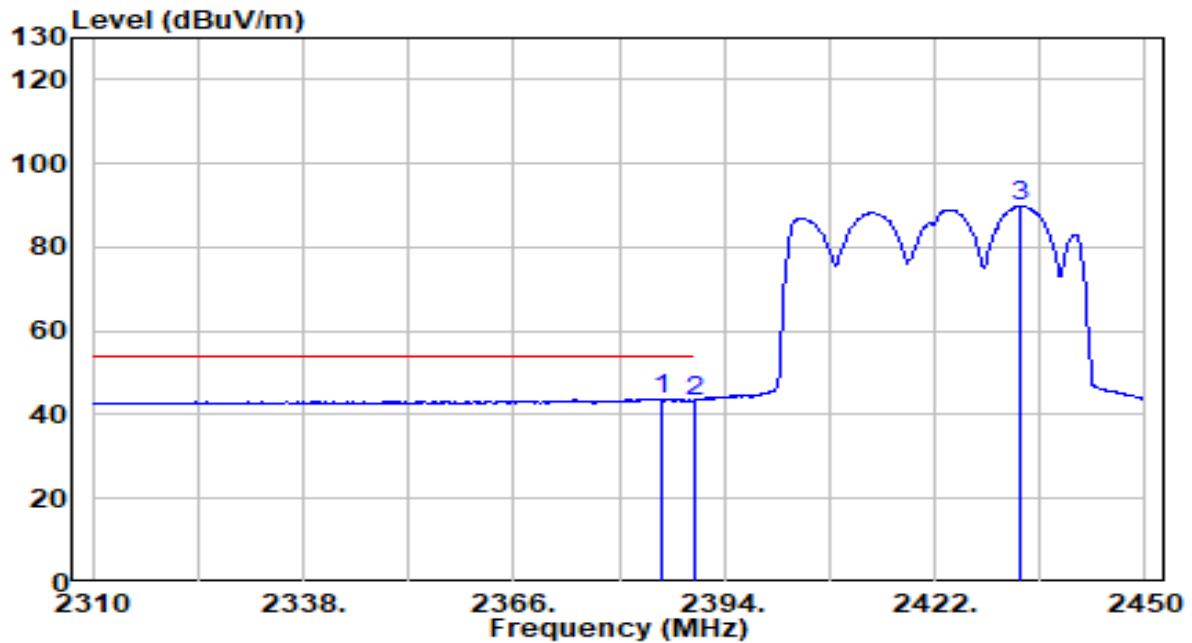


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.600	13.13	30.61	43.74	-10.26	54.00	115	95	Average
2		2390.000	12.73	30.61	43.34	-10.66	54.00	115	95	Average
3		2433.480	59.05	30.74	89.79	N/A	N/A	115	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

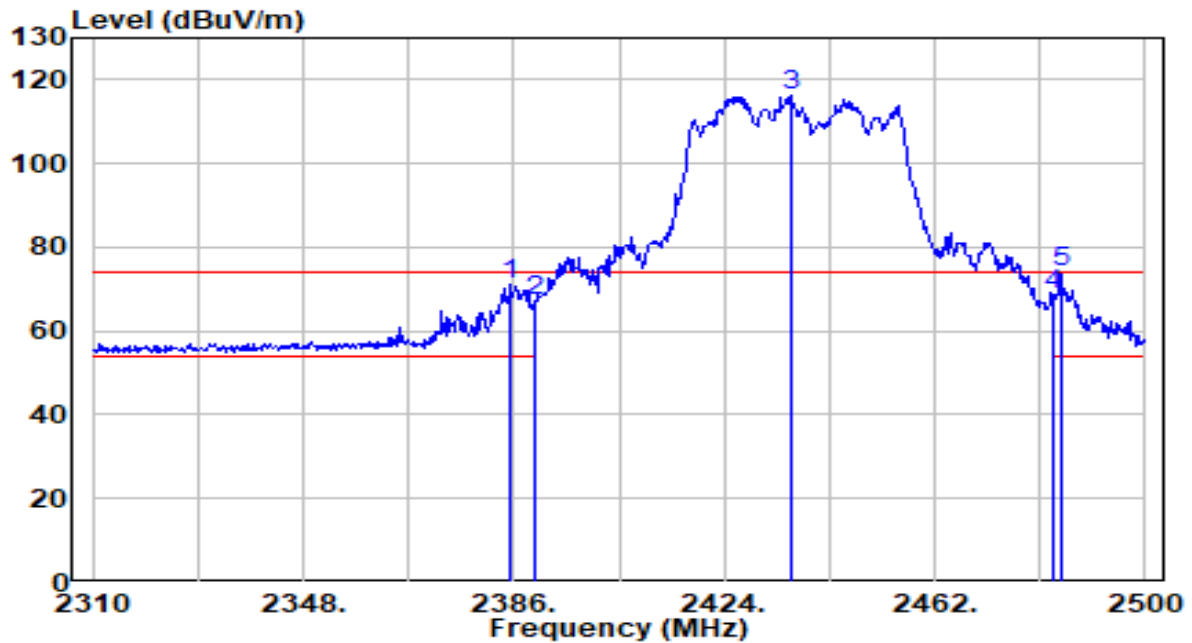


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	40.40	30.61	71.01	-2.99	74.00	110	15	Peak
2	2390.000	36.62	30.61	67.23	-6.77	74.00	110	15	Peak
3	2435.970	85.49	30.75	116.25	N/A	N/A	110	15	Peak
4	2483.500	37.55	30.91	68.46	-5.54	74.00	110	15	Peak
5	* 2484.800	42.97	30.92	73.89	-0.11	74.00	110	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

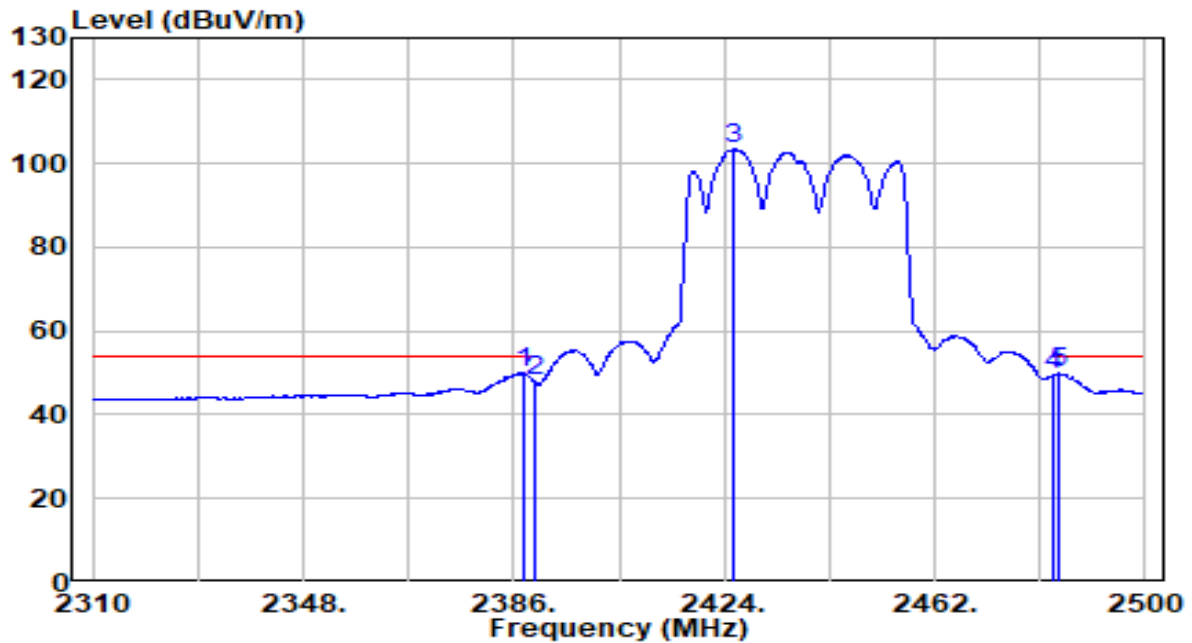


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	19.35	30.61	49.96	-4.04	54.00	110	15	Average
2		2390.000	17.29	30.61	47.90	-6.10	54.00	110	15	Average
3		2425.900	72.71	30.72	103.43	N/A	N/A	110	15	Average
4		2483.500	18.53	30.91	49.45	-4.55	54.00	110	15	Average
5		2484.230	18.88	30.92	49.80	-4.20	54.00	110	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

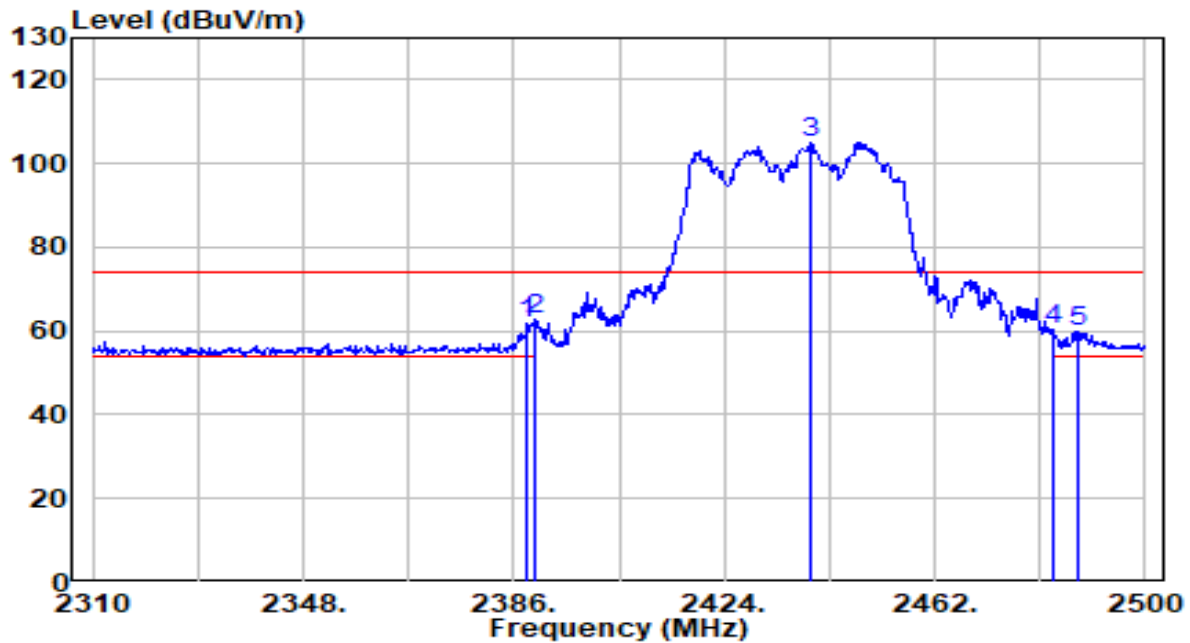


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.280	31.24	30.61	61.85	-12.15	74.00	105	95	Peak
2	*	2390.000	32.20	30.61	62.81	-11.19	74.00	105	95	Peak
3		2439.580	74.40	30.76	105.16	N/A	N/A	105	95	Peak
4		2483.500	29.46	30.91	60.37	-13.63	74.00	105	95	Peak
5		2487.650	29.14	30.93	60.07	-13.93	74.00	105	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

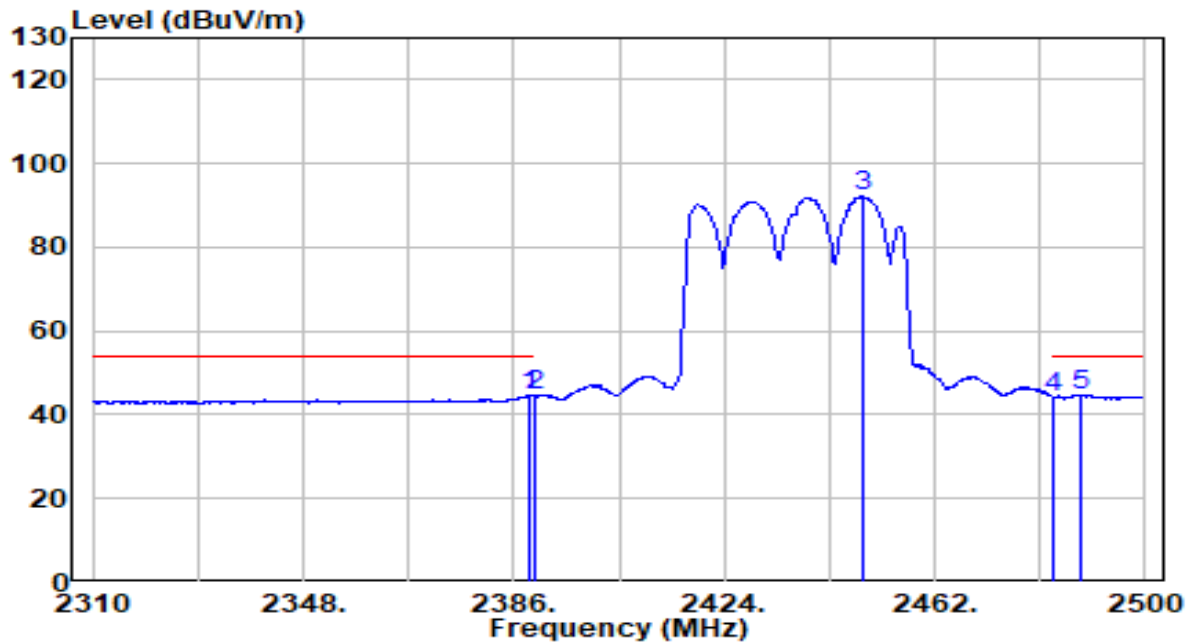


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	13.85	30.61	44.47	-9.53	54.00	105	95	Average
2	2390.000	14.02	30.61	44.63	-9.37	54.00	105	95	Average
3	2448.890	61.32	30.80	92.11	N/A	N/A	105	95	Average
4	2483.500	13.41	30.91	44.33	-9.67	54.00	105	95	Average
5	* 2488.220	13.87	30.93	44.80	-9.20	54.00	105	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHzz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

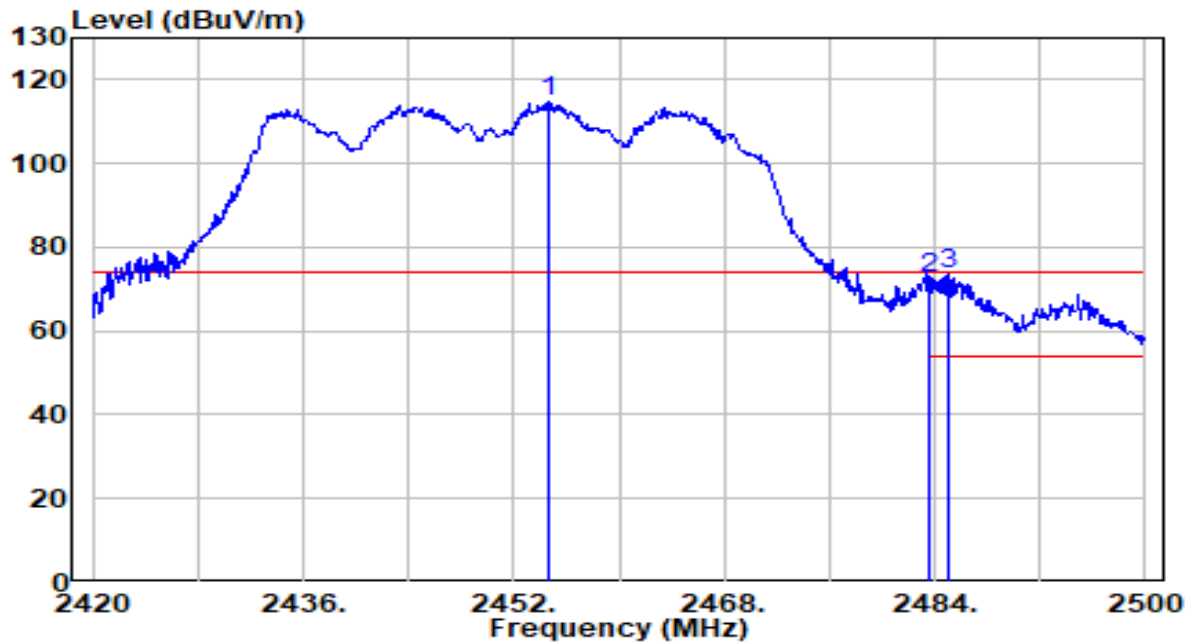


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.640	84.14	30.81	114.96	N/A	N/A	160	345	Peak
2	2483.500	41.59	30.91	72.50	-1.50	74.00	160	345	Peak
3	* 2484.960	42.71	30.92	73.63	-0.37	74.00	160	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHzz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

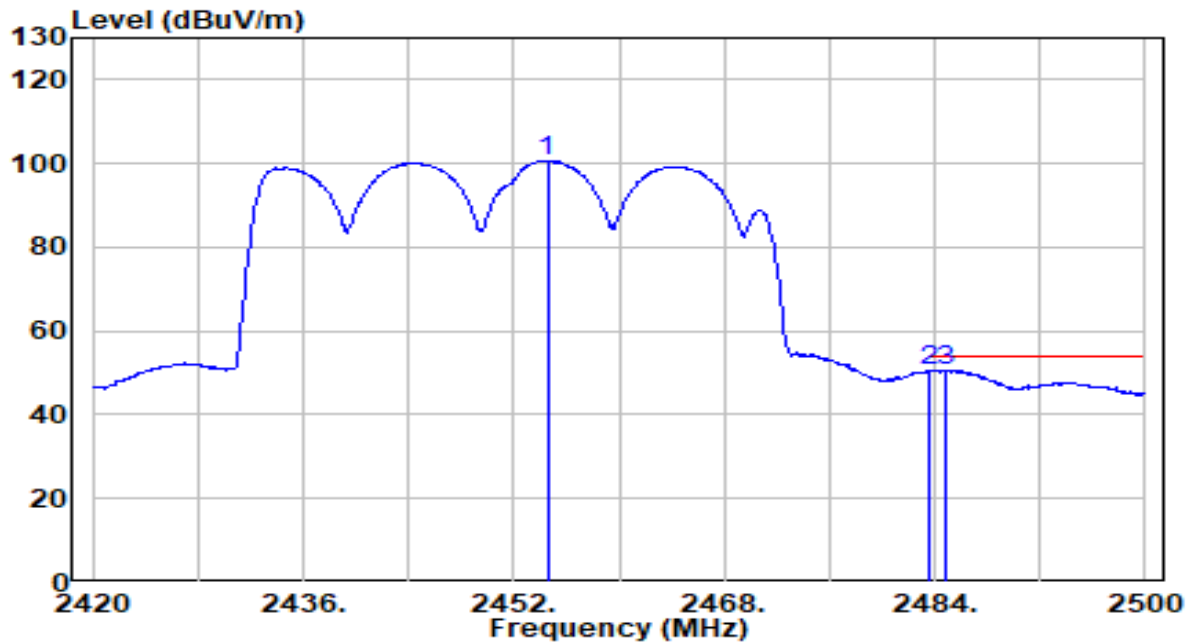


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.560	69.81	30.81	100.63	N/A	N/A	160	345	Average
2	2483.500	19.74	30.91	50.65	-3.35	54.00	160	345	Average
3	* 2484.880	19.81	30.92	50.73	-3.27	54.00	160	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHzz_TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

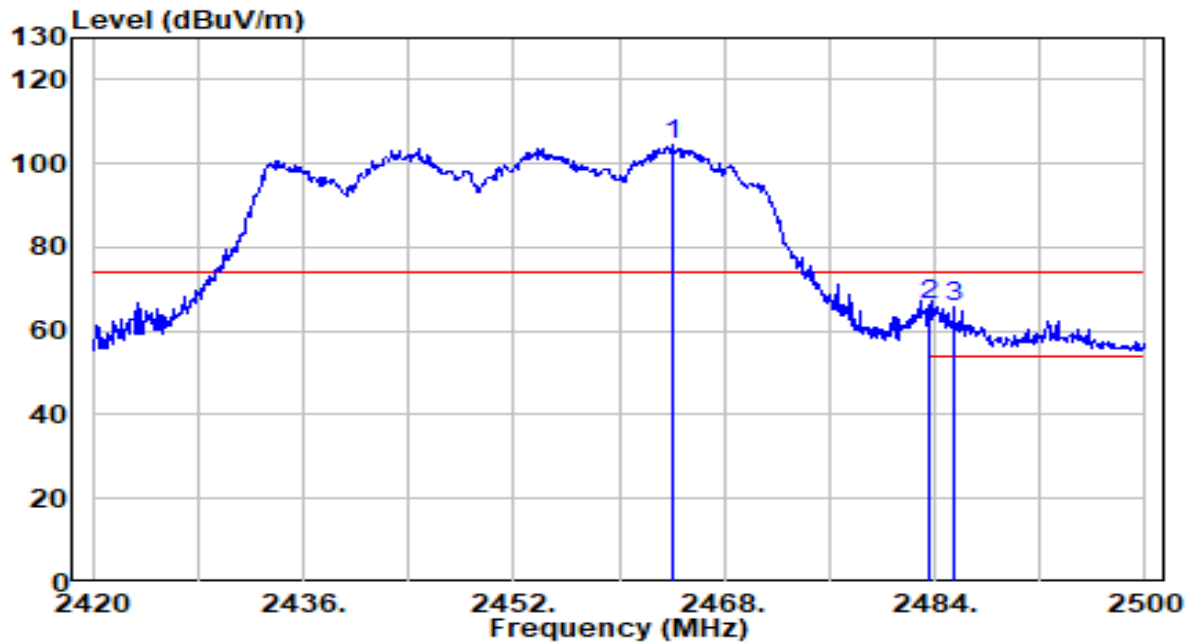


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.000	73.77	30.85	104.62	N/A	N/A	225	295	Peak
2	* 2483.500	35.14	30.91	66.06	-7.94	74.00	225	295	Peak
3	2485.440	34.81	30.92	65.73	-8.27	74.00	225	295	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-13
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz-TX_CH 9_ANT 0+1 (Horizontal Ant)	Test Voltage	AC 120V/60Hz

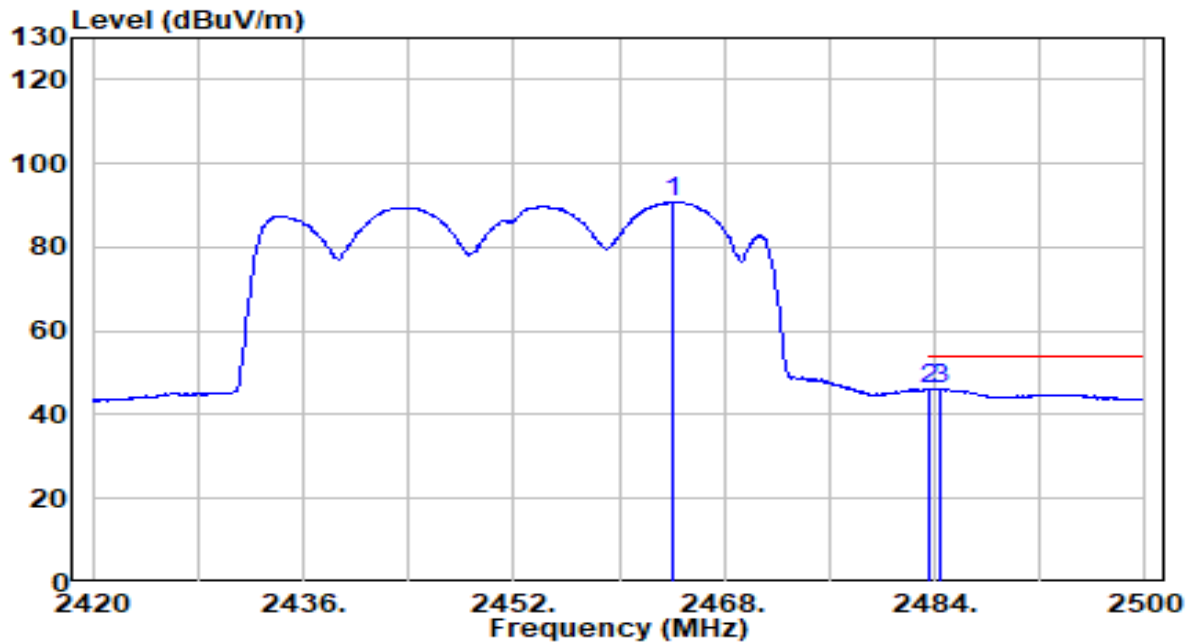


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.160	59.93	30.85	90.77	N/A	N/A	225	295	Average
2	*	2483.500	15.39	30.91	46.30	-7.70	54.00	225	295	Average
3		2484.480	15.28	30.92	46.19	-7.81	54.00	225	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical Antenna

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

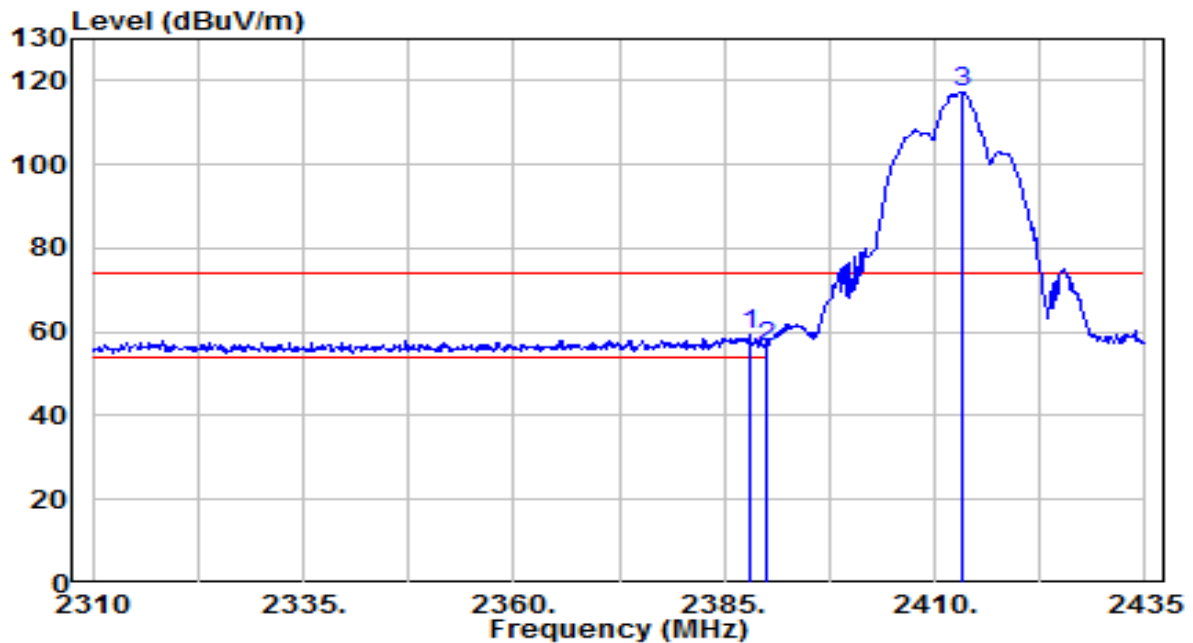


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	28.71	30.61	59.32	-14.68	74.00	400	170	Peak
2		2390.000	25.92	30.61	56.53	-17.47	74.00	400	170	Peak
3		2413.125	86.66	30.67	117.33	N/A	N/A	400	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

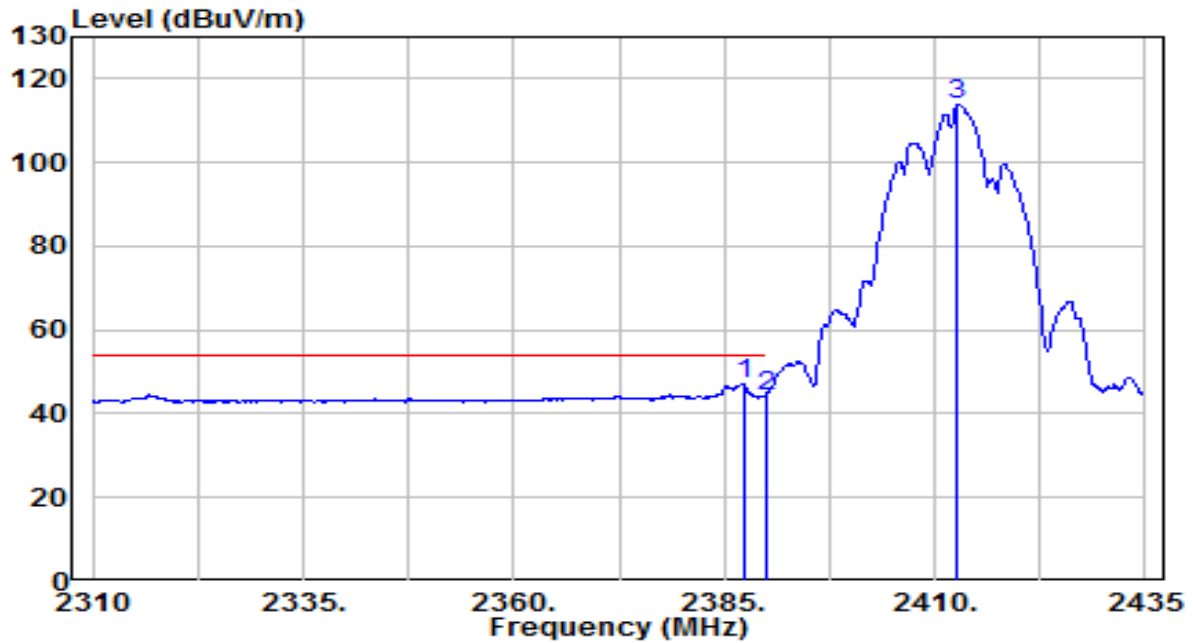


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.250	16.47	30.61	47.08	-6.92	54.00	400	170	Average
2		2390.000	13.74	30.61	44.36	-9.64	54.00	400	170	Average
3		2412.750	83.31	30.67	113.99	N/A	N/A	400	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

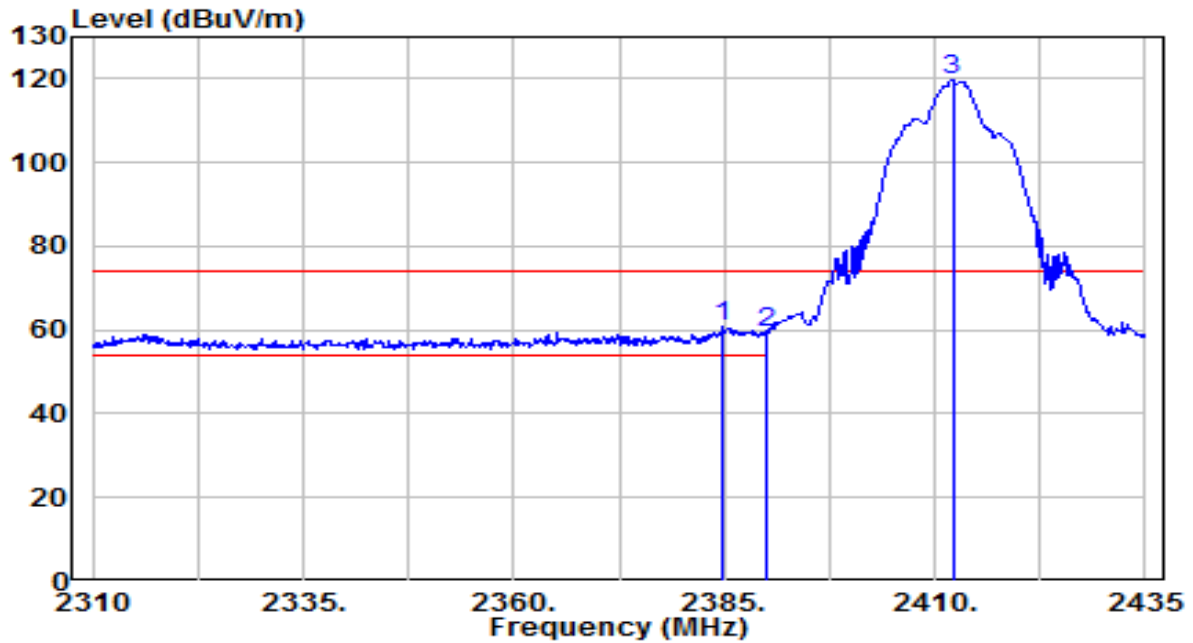


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.875	30.30	30.61	60.90	-13.10	74.00	195	310	Peak
2		2390.000	28.59	30.61	59.20	-14.80	74.00	195	310	Peak
3		2412.125	88.94	30.67	119.61	N/A	N/A	195	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

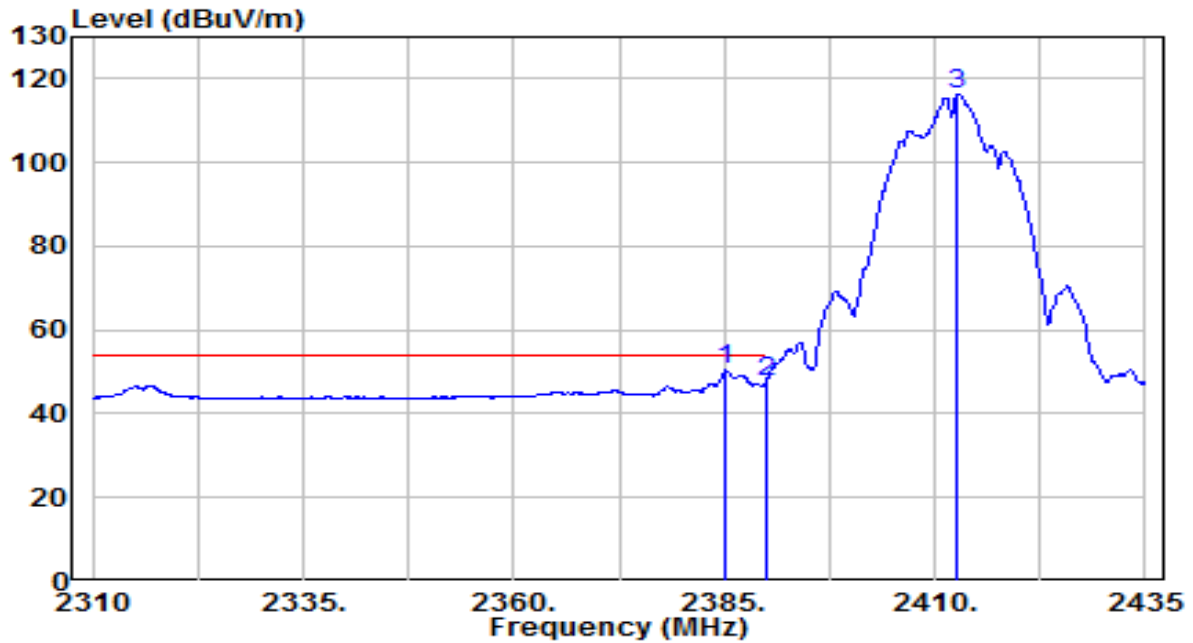


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.125	19.82	30.61	50.43	-3.57	54.00	195	310	Average
2		2390.000	17.21	30.61	47.83	-6.17	54.00	195	310	Average
3		2412.750	85.69	30.67	116.36	N/A	N/A	195	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

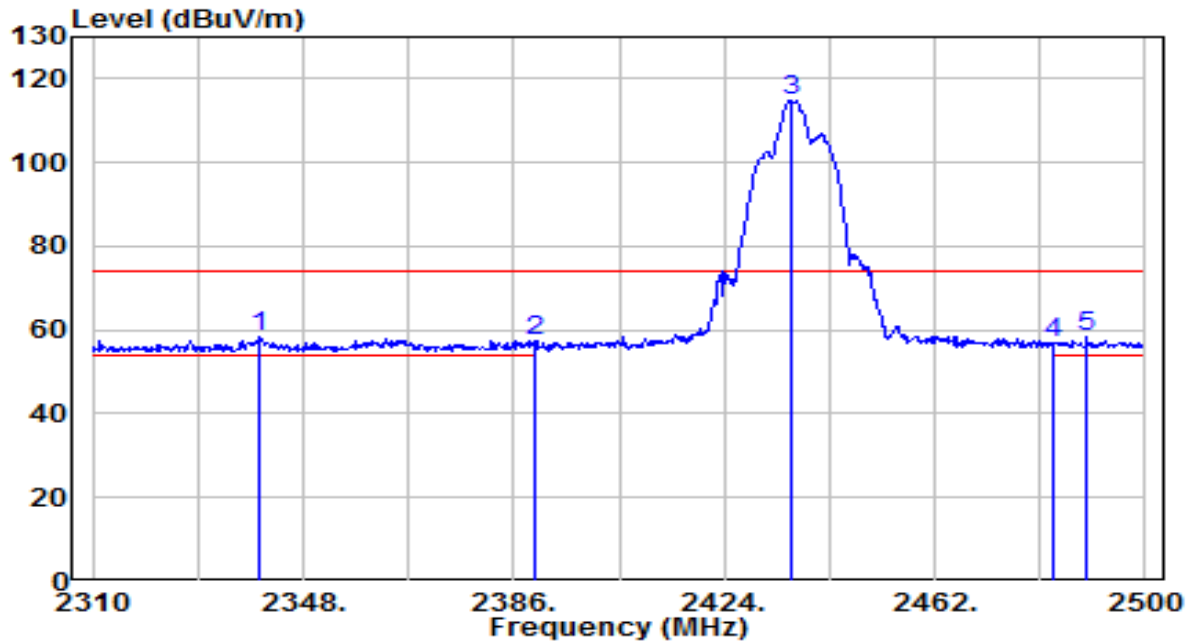


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2339.830	27.69	30.54	58.23	-15.77	74.00	165	305	Peak
2	2390.000	26.89	30.61	57.50	-16.50	74.00	165	305	Peak
3	2435.970	84.16	30.75	114.91	N/A	N/A	165	305	Peak
4	2483.500	25.81	30.91	56.73	-17.27	74.00	165	305	Peak
5	* 2489.550	27.62	30.93	58.56	-15.44	74.00	165	305	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

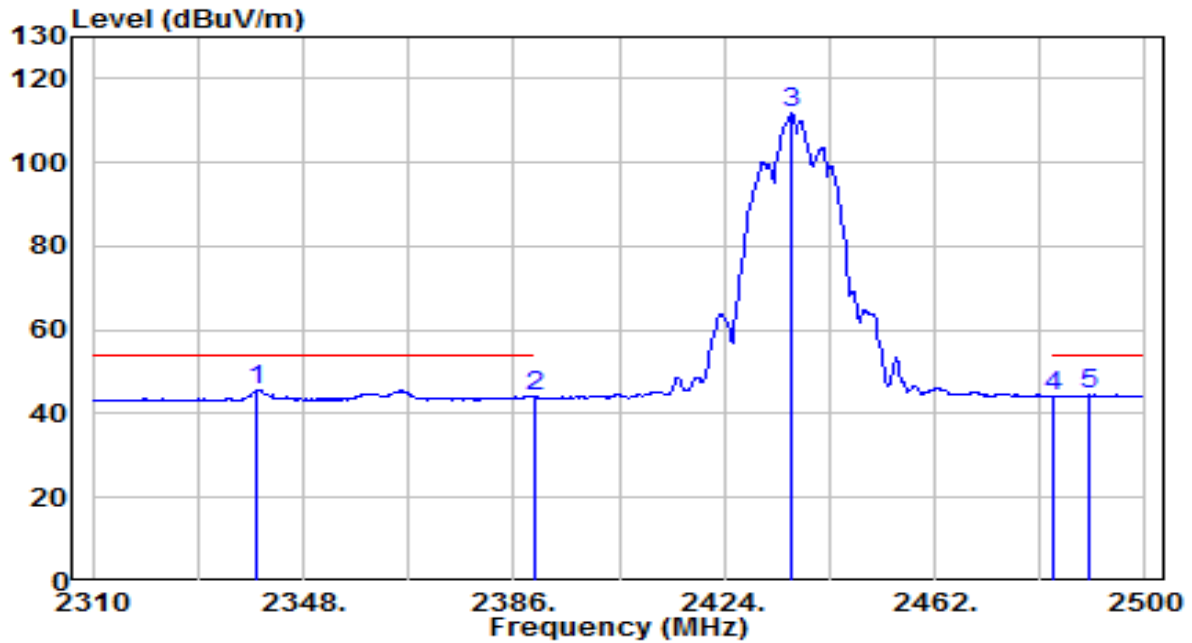


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.640	15.30	30.54	45.84	-8.16	54.00	165	305	Average
2		2390.000	13.47	30.61	44.09	-9.91	54.00	165	305	Average
3		2436.350	80.99	30.75	111.75	N/A	N/A	165	305	Average
4		2483.500	13.41	30.91	44.32	-9.68	54.00	165	305	Average
5		2489.740	13.71	30.93	44.64	-9.36	54.00	165	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

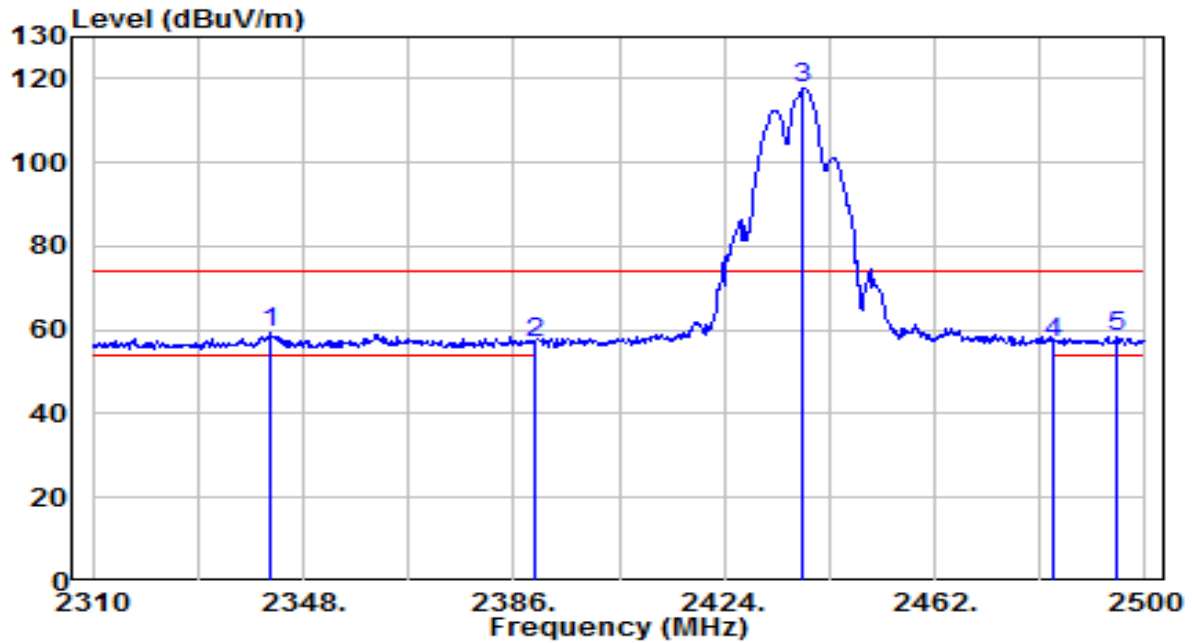


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.110	28.72	30.55	59.26	-14.74	74.00	155	195	Peak
2		2390.000	26.29	30.61	56.90	-17.10	74.00	155	195	Peak
3		2438.250	87.12	30.76	117.88	N/A	N/A	155	195	Peak
4		2483.500	26.10	30.91	57.02	-16.98	74.00	155	195	Peak
5		2495.060	27.32	30.95	58.28	-15.72	74.00	155	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

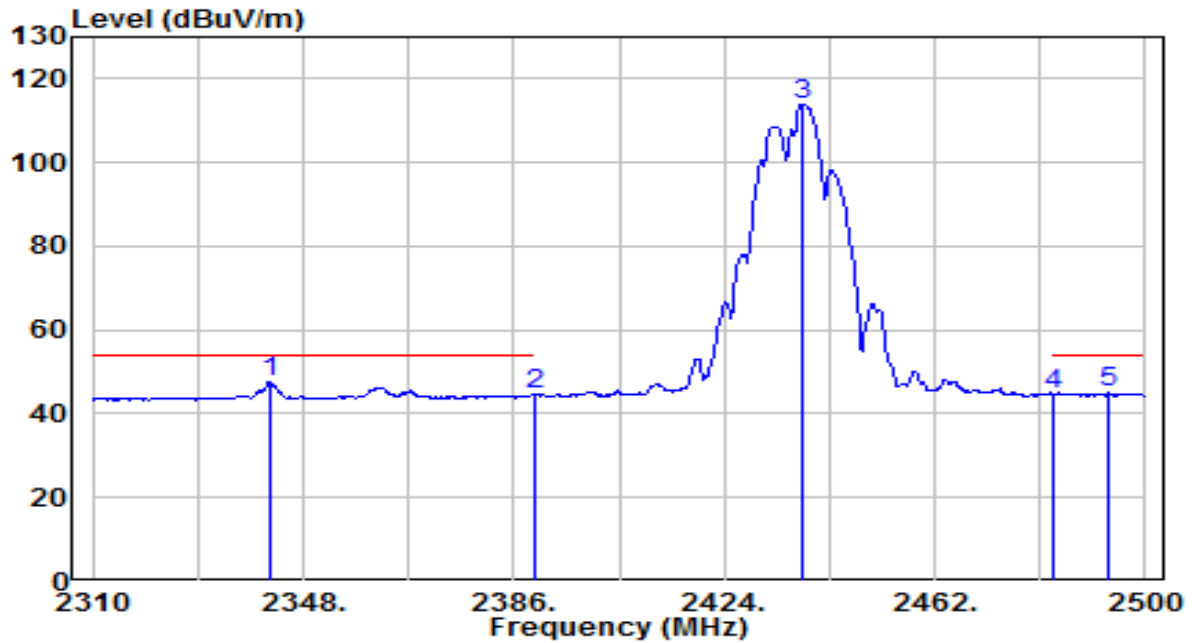


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.110	16.86	30.55	47.40	-6.60	54.00	155	195	Average
2		2390.000	14.00	30.61	44.62	-9.38	54.00	155	195	Average
3		2438.250	83.26	30.76	114.02	N/A	N/A	155	195	Average
4		2483.500	13.62	30.91	44.53	-9.47	54.00	155	195	Average
5		2493.540	13.96	30.95	44.91	-9.09	54.00	155	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

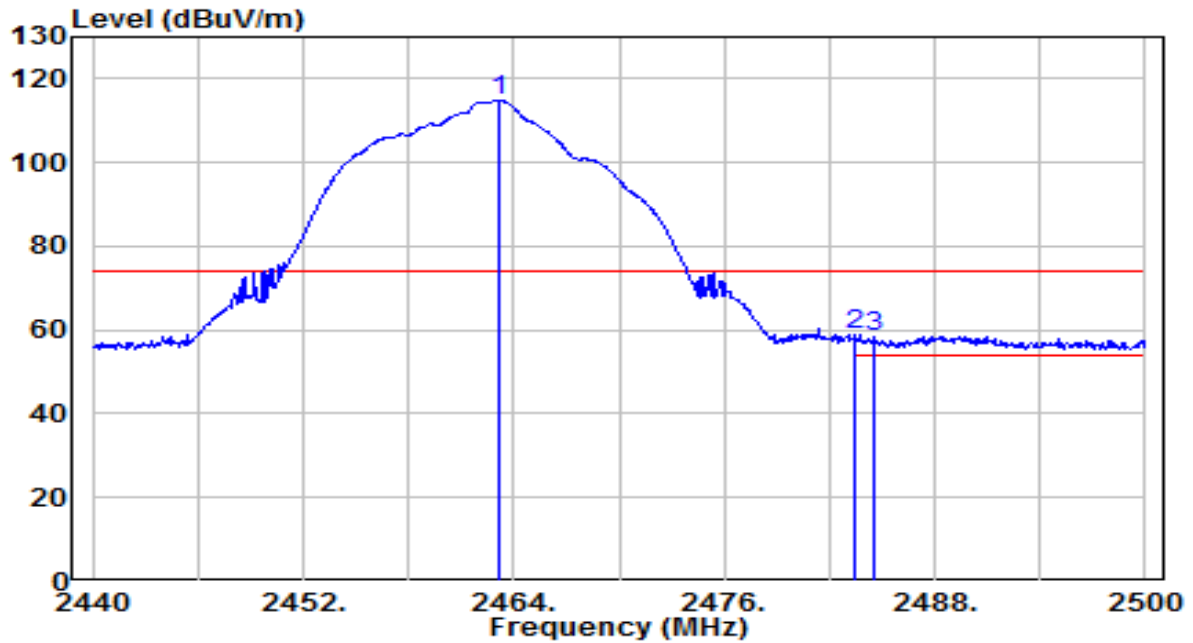


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.100	84.14	30.84	114.99	N/A	N/A	105	265	Peak
2	*	2483.500	28.05	30.91	58.96	-15.04	74.00	105	265	Peak
3		2484.580	27.56	30.92	58.48	-15.52	74.00	105	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

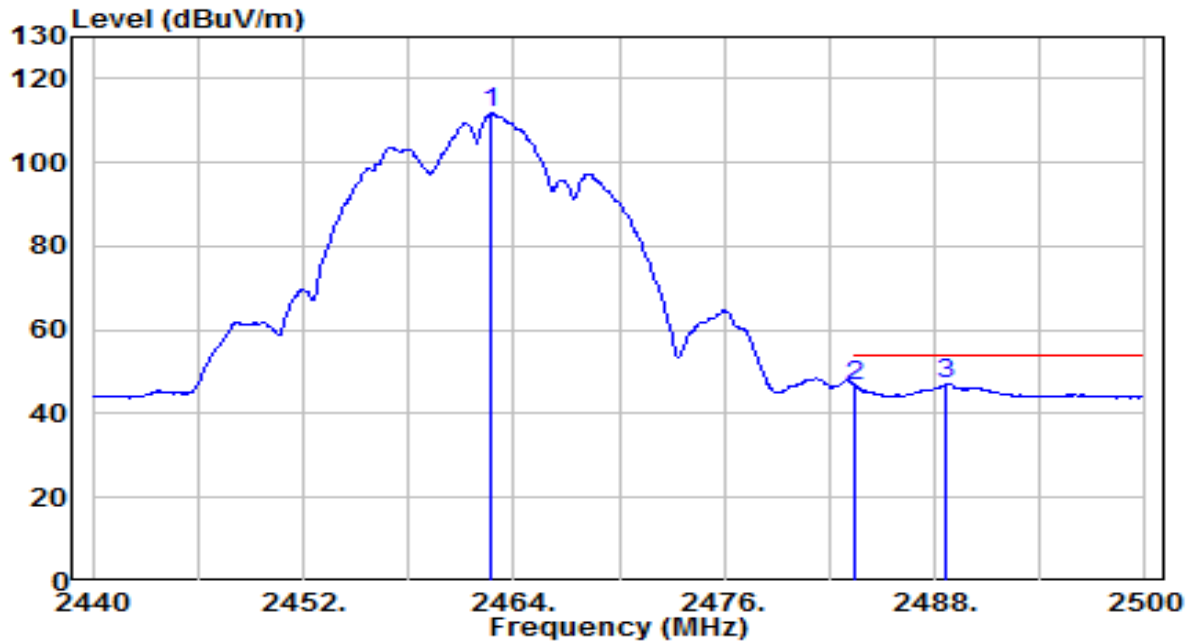


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	80.80	30.84	111.64	N/A	N/A	105	265	Average
2	2483.500	15.80	30.91	46.71	-7.29	54.00	105	265	Average
3	* 2488.600	16.13	30.93	47.06	-6.94	54.00	105	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

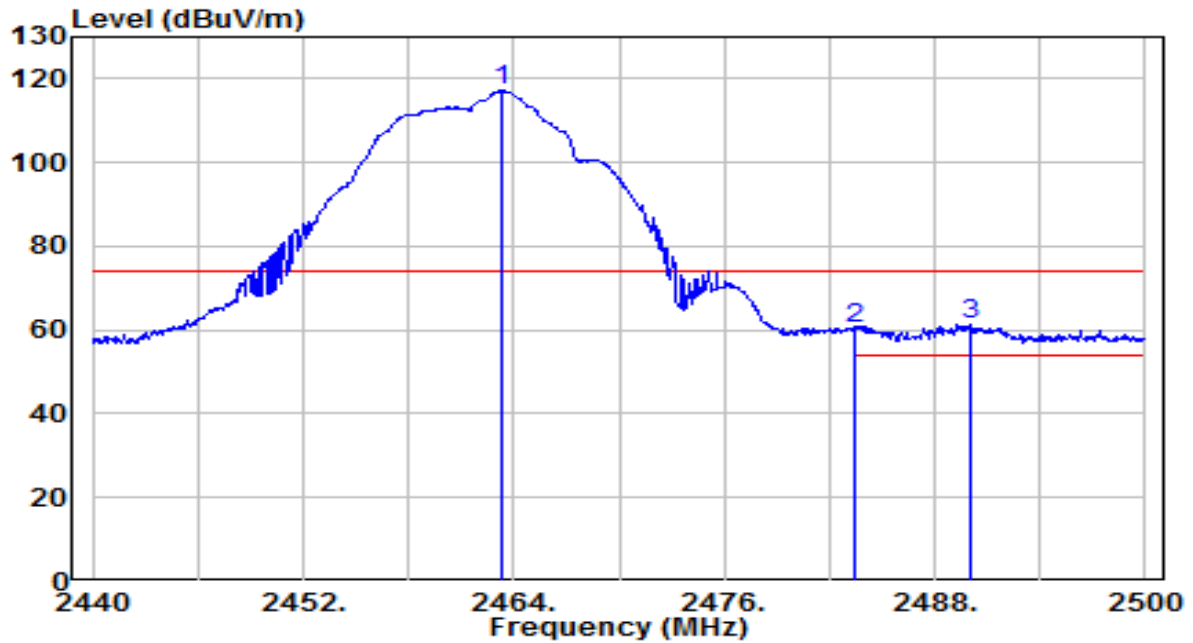


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.340	86.18	30.84	117.02	N/A	N/A	100	130	Peak
2	2483.500	29.67	30.91	60.58	-13.42	74.00	100	130	Peak
3	* 2489.980	30.16	30.94	61.09	-12.91	74.00	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11b_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

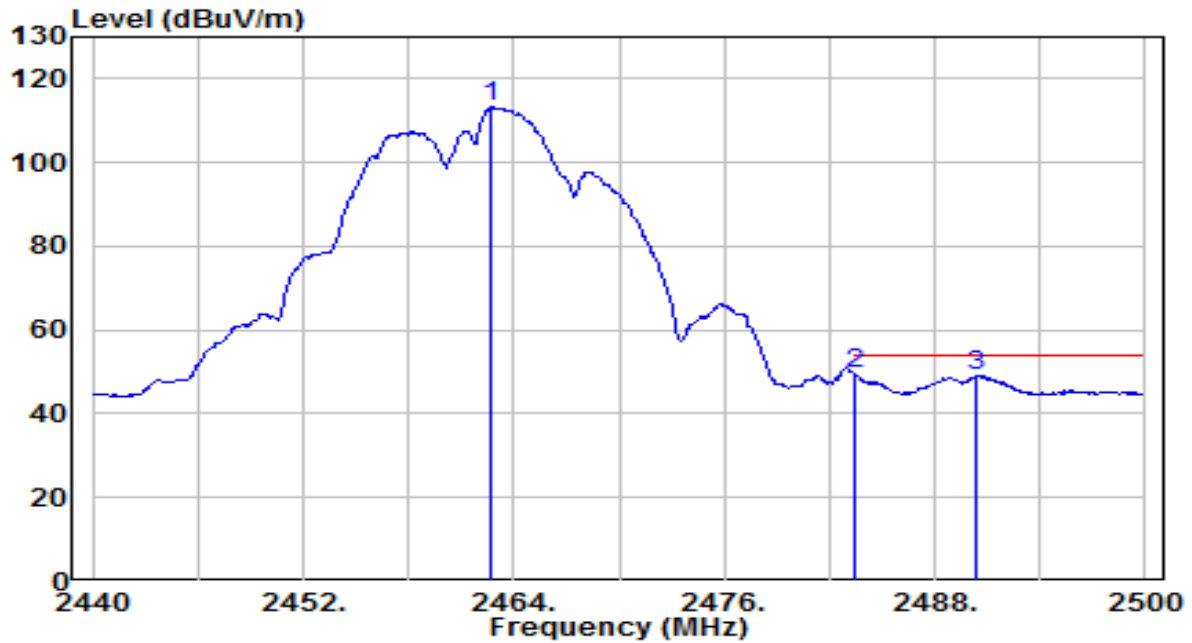


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.740	82.26	30.84	113.10	N/A	N/A	100	130	Average
2	*	2483.500	18.74	30.91	49.65	-4.35	54.00	100	130	Average
3		2490.340	18.29	30.94	49.23	-4.77	54.00	100	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

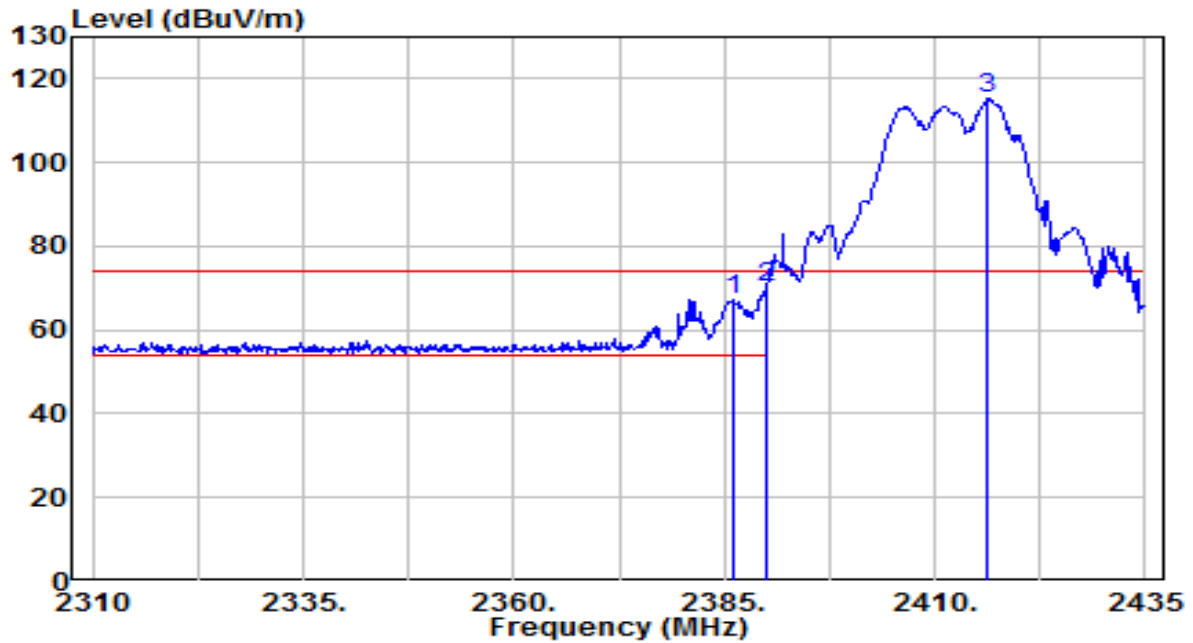


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.125	36.50	30.61	67.11	-6.89	74.00	395	170	Peak
2	*	2390.000	39.41	30.61	70.03	-3.97	74.00	395	170	Peak
3		2416.375	84.57	30.68	115.25	N/A	N/A	395	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

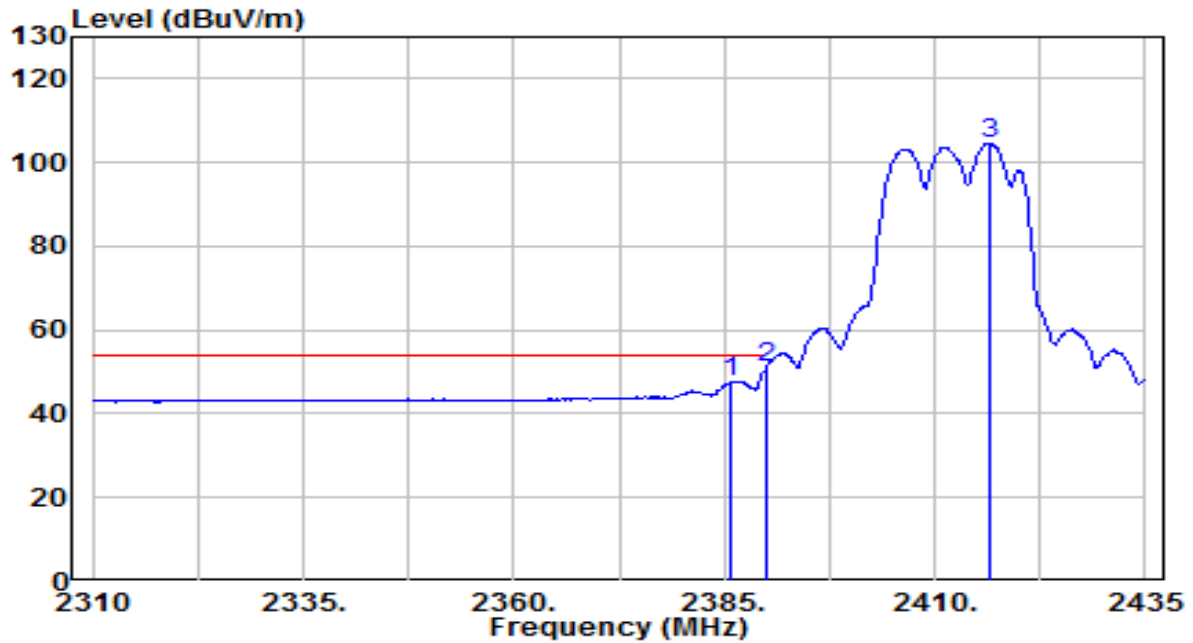


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.875	17.21	30.61	47.82	-6.18	54.00	395	170	Average
2	*	2390.000	20.31	30.61	50.93	-3.07	54.00	395	170	Average
3		2416.500	74.03	30.68	104.72	N/A	N/A	395	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

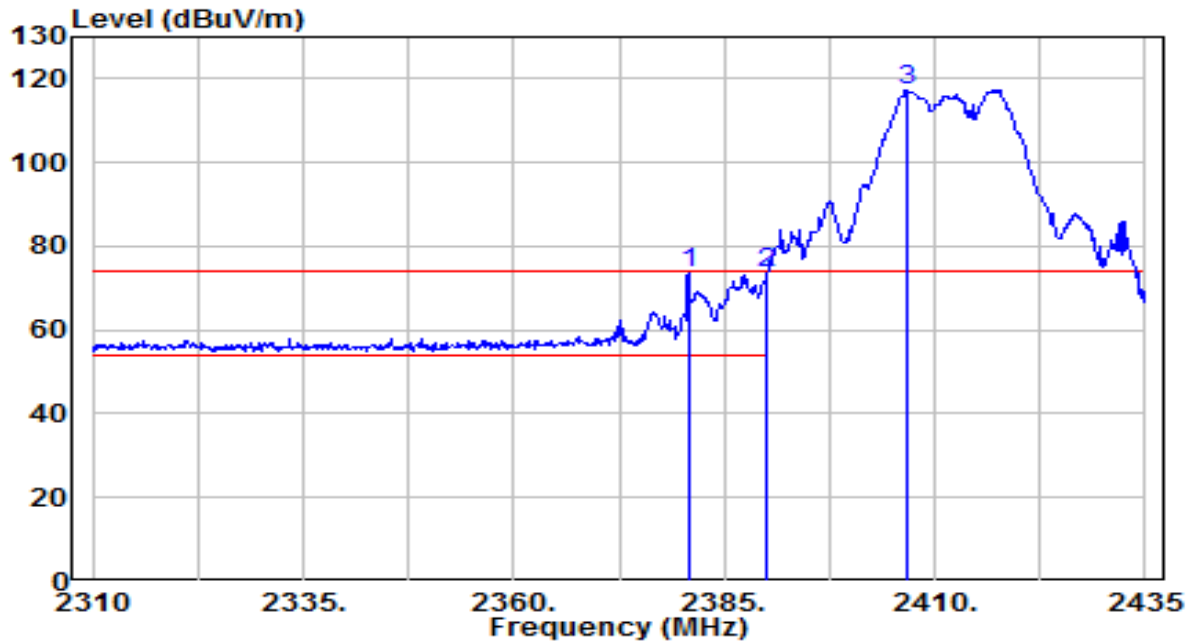


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.750	43.01	30.60	73.61	-0.39	74.00	200	325	Peak
2		2390.000	42.93	30.61	73.54	-0.46	74.00	200	325	Peak
3		2406.625	86.71	30.65	117.36	N/A	N/A	200	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

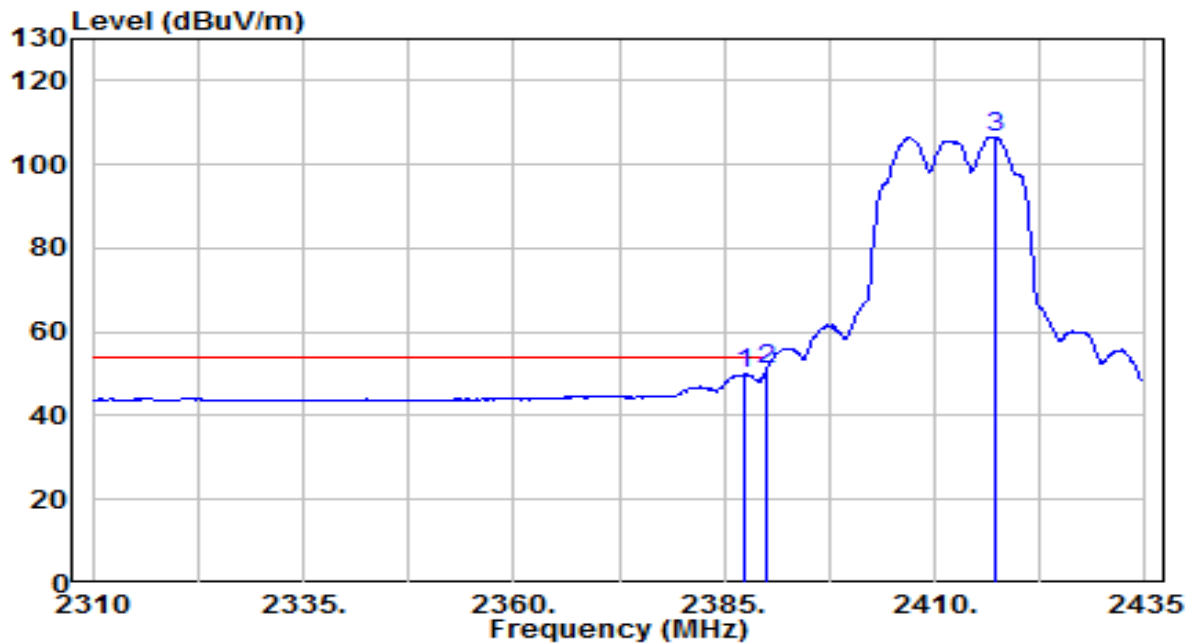


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.375	19.29	30.61	49.90	-4.10	54.00	200	325	Average
2	*	2390.000	20.23	30.61	50.85	-3.15	54.00	200	325	Average
3		2417.125	75.86	30.69	106.55	N/A	N/A	200	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

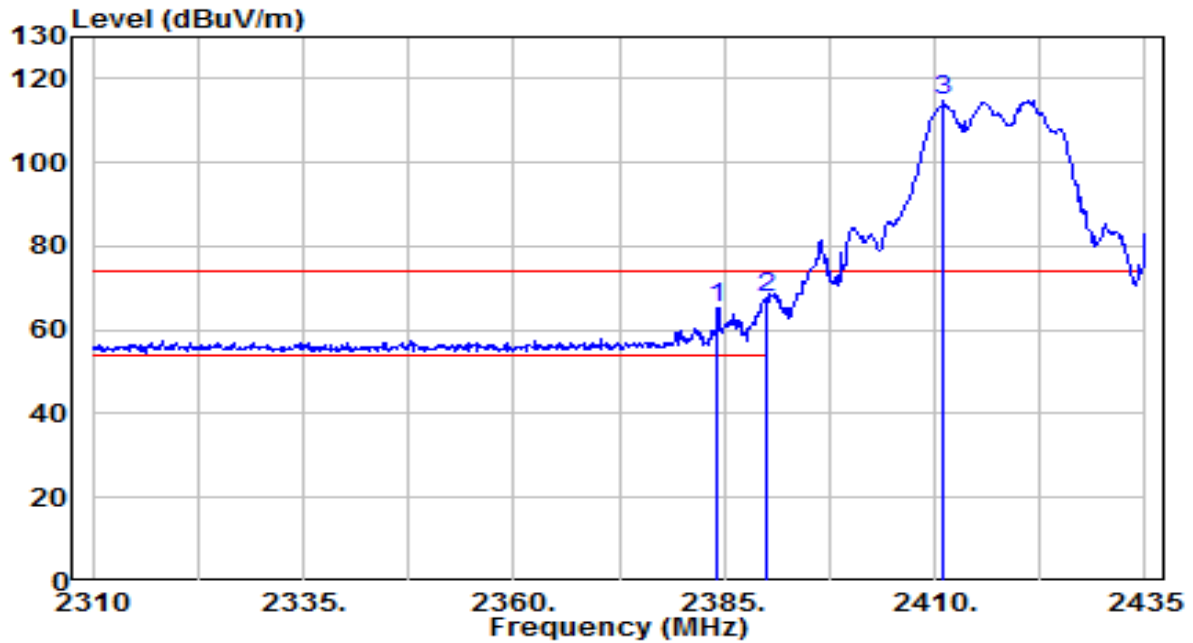


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.250	34.77	30.61	65.37	-8.63	74.00	400	190	Peak
2	*	2390.000	36.98	30.61	67.59	-6.41	74.00	400	190	Peak
3		2411.125	84.11	30.67	114.78	N/A	N/A	400	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

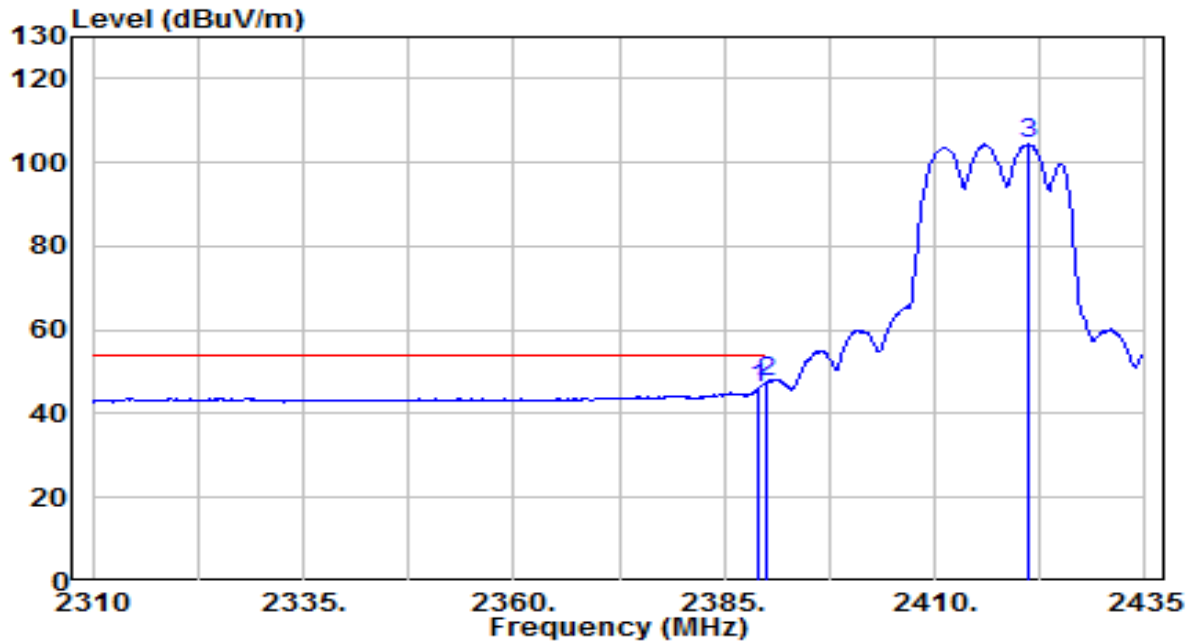


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	15.27	30.61	45.88	-8.12	54.00	400	190	Average
2	*	2390.000	16.86	30.61	47.48	-6.52	54.00	400	190	Average
3		2421.000	73.59	30.70	104.29	N/A	N/A	400	190	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

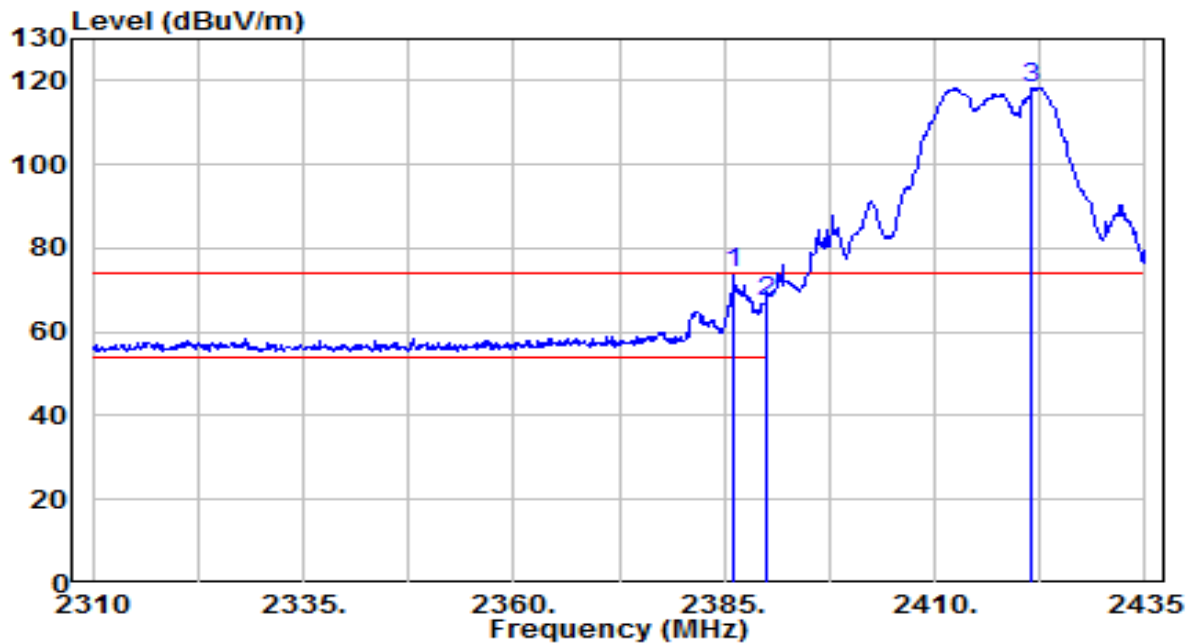


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.250	43.26	30.61	73.87	-0.13	74.00	185	325	Peak
2		2390.000	36.60	30.61	67.22	-6.78	74.00	185	325	Peak
3		2421.500	87.66	30.70	118.36	N/A	N/A	185	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

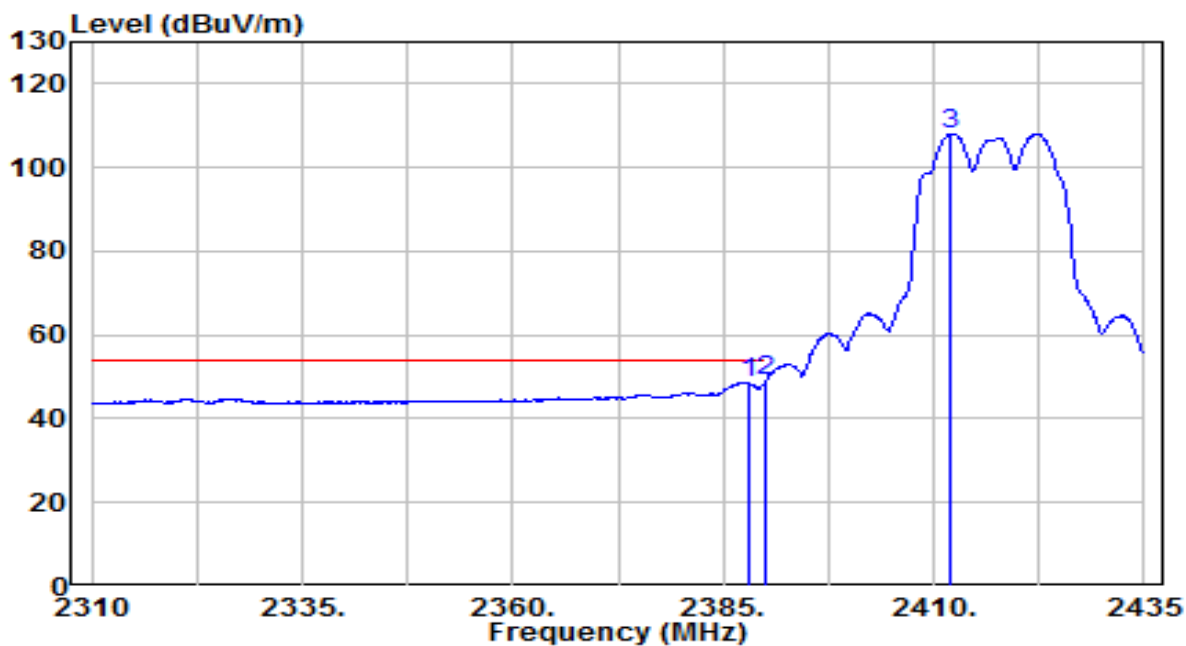


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	17.99	30.61	48.60	-5.40	54.00	185	325	Average
2	*	2390.000	18.30	30.61	48.92	-5.08	54.00	185	325	Average
3		2411.875	77.42	30.67	108.09	N/A	N/A	185	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

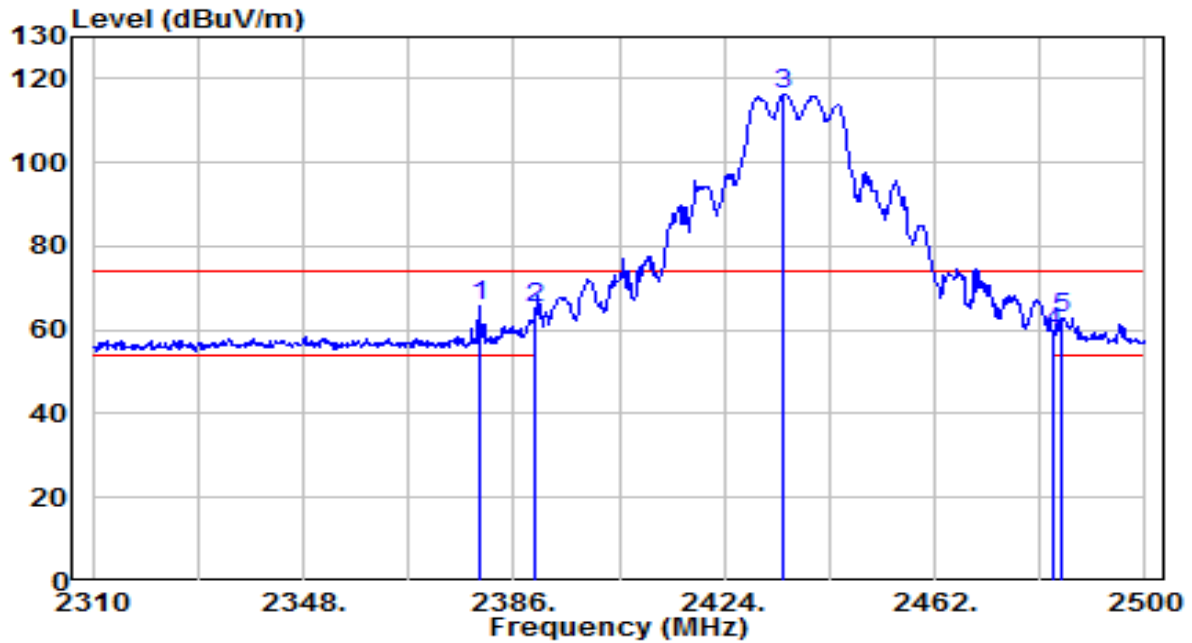


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2379.730	34.90	30.60	65.50	-8.50	74.00	155	305	Peak
2		2390.000	34.82	30.61	65.43	-8.57	74.00	155	305	Peak
3		2434.640	85.62	30.75	116.36	N/A	N/A	155	305	Peak
4		2483.500	28.39	30.91	59.30	-14.70	74.00	155	305	Peak
5		2484.990	31.80	30.92	62.72	-11.28	74.00	155	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

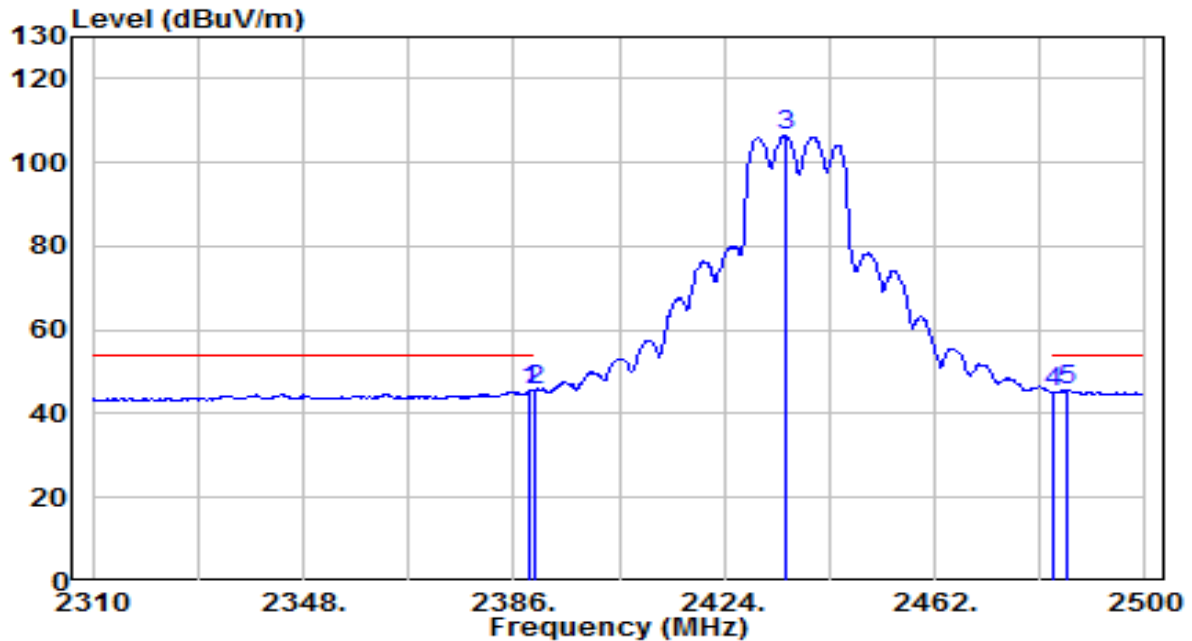


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	14.89	30.61	45.50	-8.50	54.00	155	305	Average
2	*	2390.000	15.09	30.61	45.71	-8.29	54.00	155	305	Average
3		2435.020	75.67	30.75	106.42	N/A	N/A	155	305	Average
4		2483.500	14.08	30.91	44.99	-9.01	54.00	155	305	Average
5		2485.940	14.62	30.92	45.54	-8.46	54.00	155	305	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

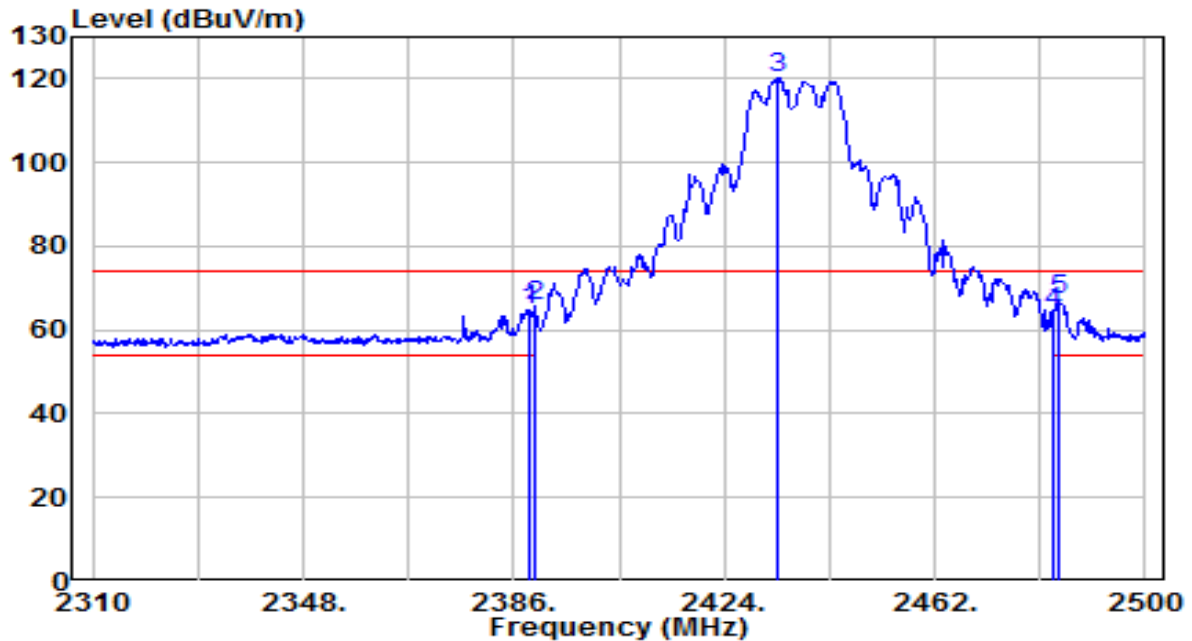


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	34.13	30.61	64.74	-9.26	74.00	135	185	Peak
2	2390.000	34.88	30.61	65.50	-8.50	74.00	135	185	Peak
3	2433.690	89.38	30.74	120.13	N/A	N/A	135	185	Peak
4	2483.500	33.56	30.91	64.48	-9.52	74.00	135	185	Peak
5	* 2484.610	36.44	30.92	67.35	-6.65	74.00	135	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

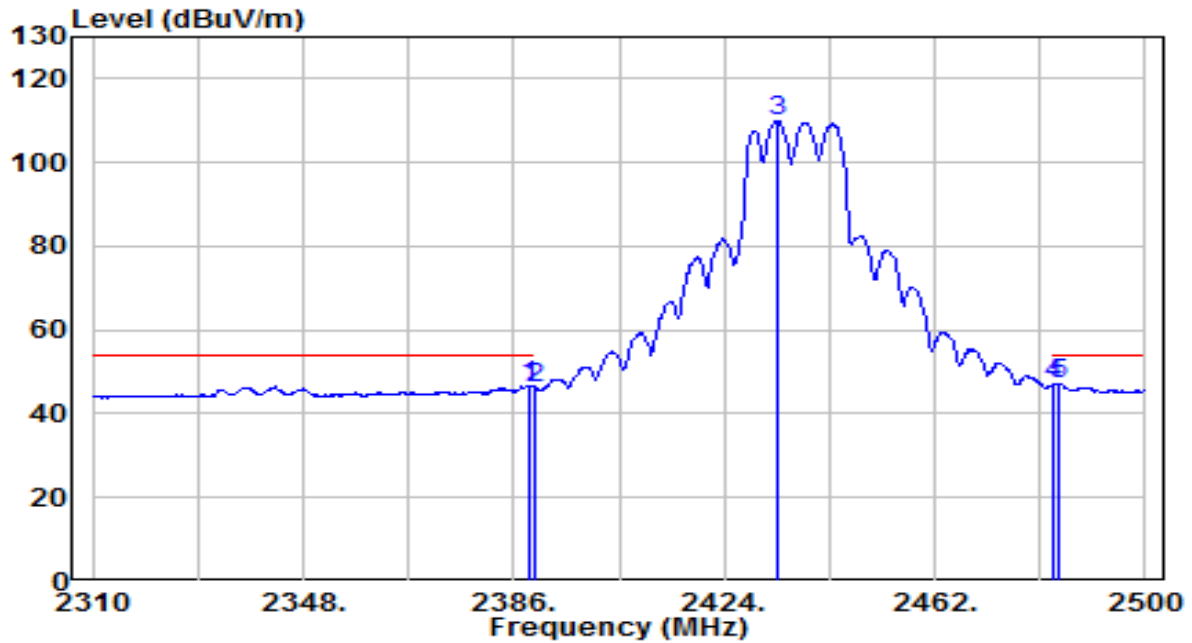


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	16.13	30.61	46.75	-7.25	54.00	135	185	Average
2	2390.000	15.67	30.61	46.28	-7.72	54.00	135	185	Average
3	2433.690	79.26	30.74	110.00	N/A	N/A	135	185	Average
4	2483.500	16.11	30.91	47.03	-6.97	54.00	135	185	Average
5	* 2484.420	16.15	30.92	47.07	-6.93	54.00	135	185	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

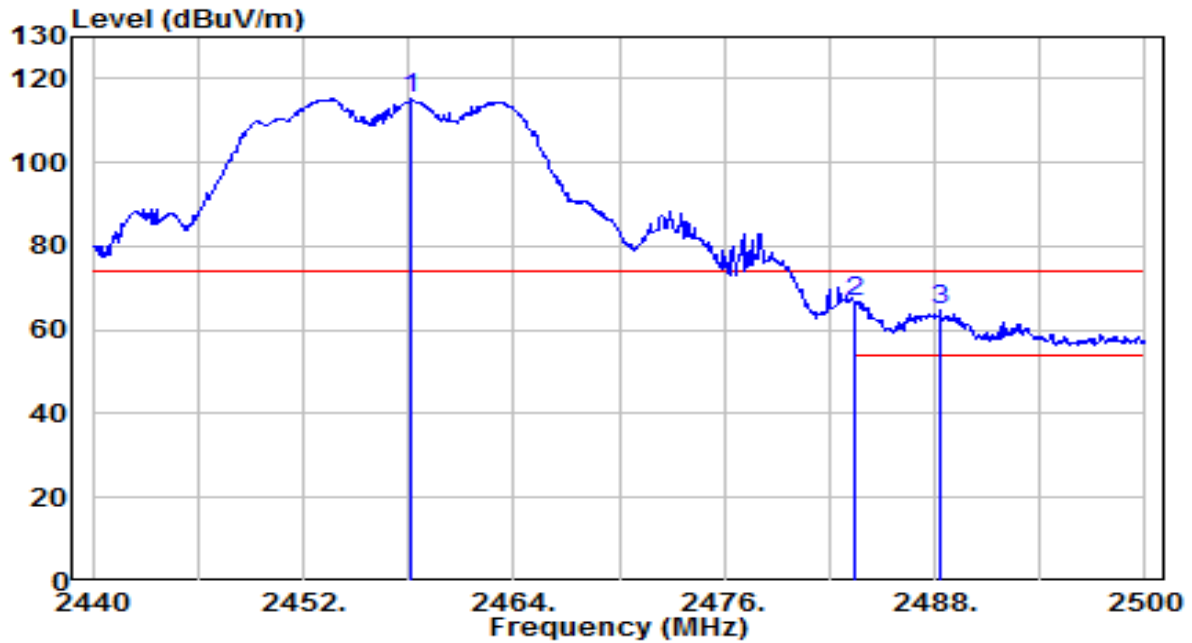


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.120	84.29	30.83	115.12	N/A	N/A	200	190	Peak
2	* 2483.500	35.86	30.91	66.77	-7.23	74.00	200	190	Peak
3	2488.300	33.59	30.93	64.52	-9.48	74.00	200	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

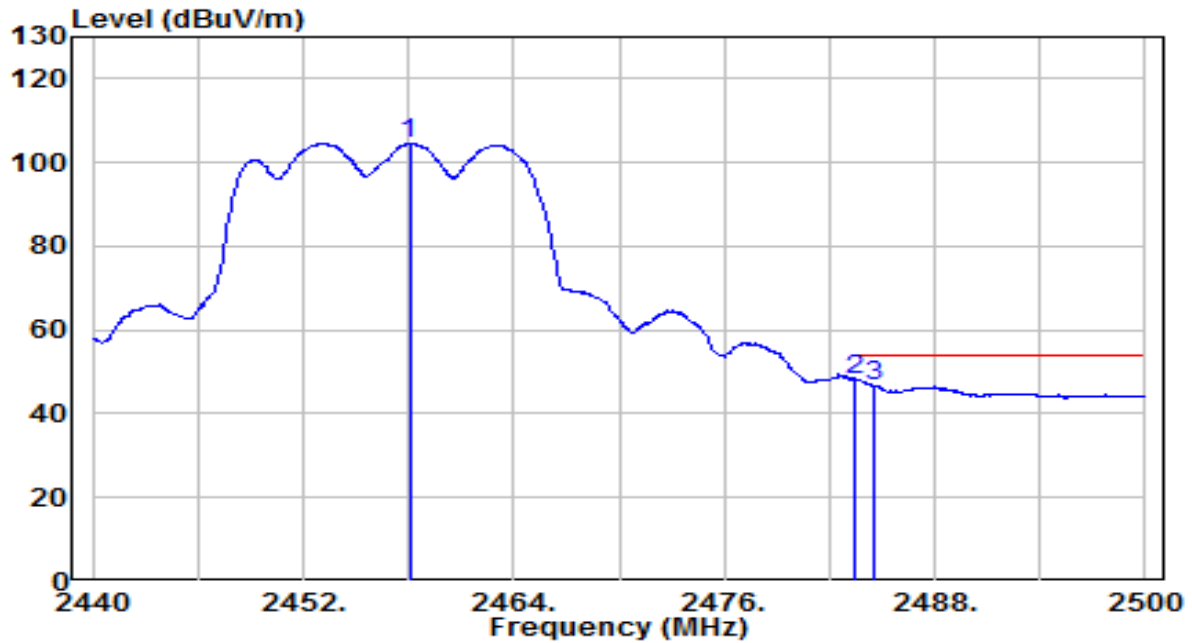


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.060	73.78	30.83	104.60	N/A	N/A	200	190	Average
2	*	2483.500	17.36	30.91	48.27	-5.73	54.00	200	190	Average
3		2484.520	15.85	30.92	46.77	-7.23	54.00	200	190	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

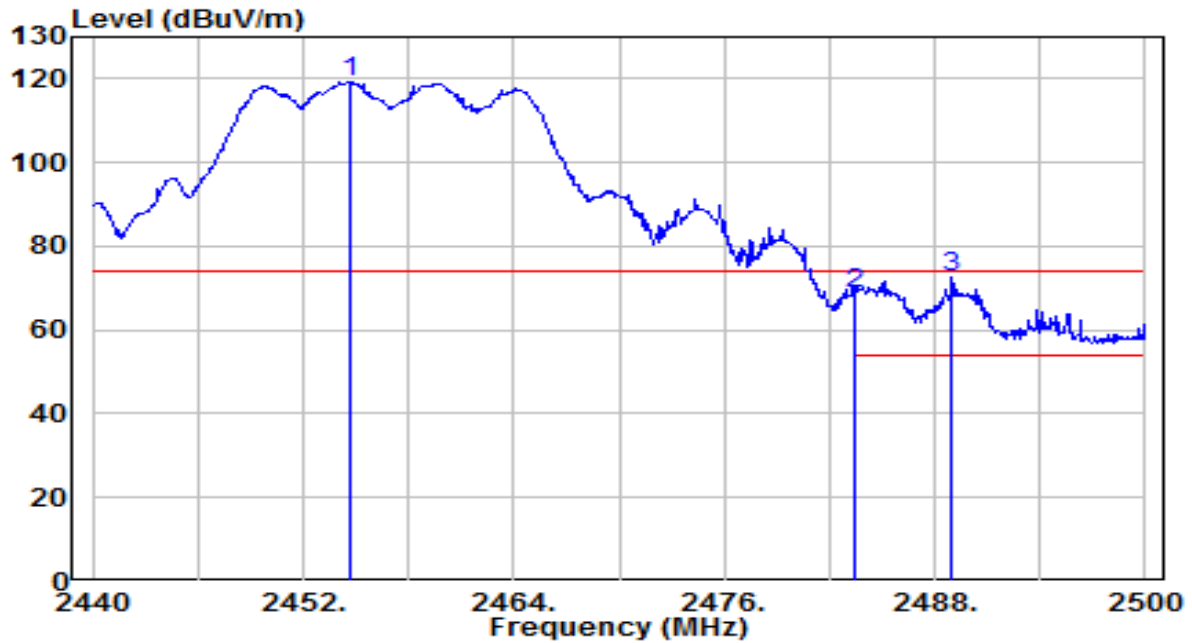


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.640	88.42	30.81	119.24	N/A	N/A	195	320	Peak
2	2483.500	37.90	30.91	68.81	-5.19	74.00	195	320	Peak
3	* 2488.960	41.68	30.93	72.61	-1.39	74.00	195	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

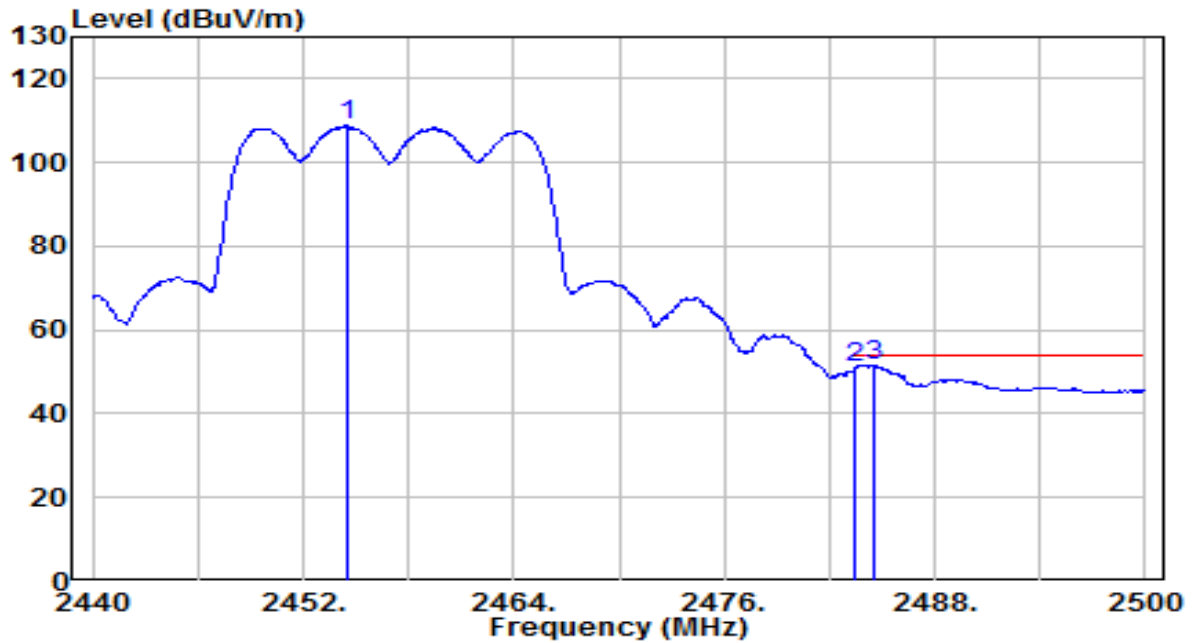


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.460	77.90	30.81	108.72	N/A	N/A	195	320	Average
2	2483.500	20.13	30.91	51.04	-2.96	54.00	195	320	Average
3	* 2484.580	20.68	30.92	51.60	-2.40	54.00	195	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

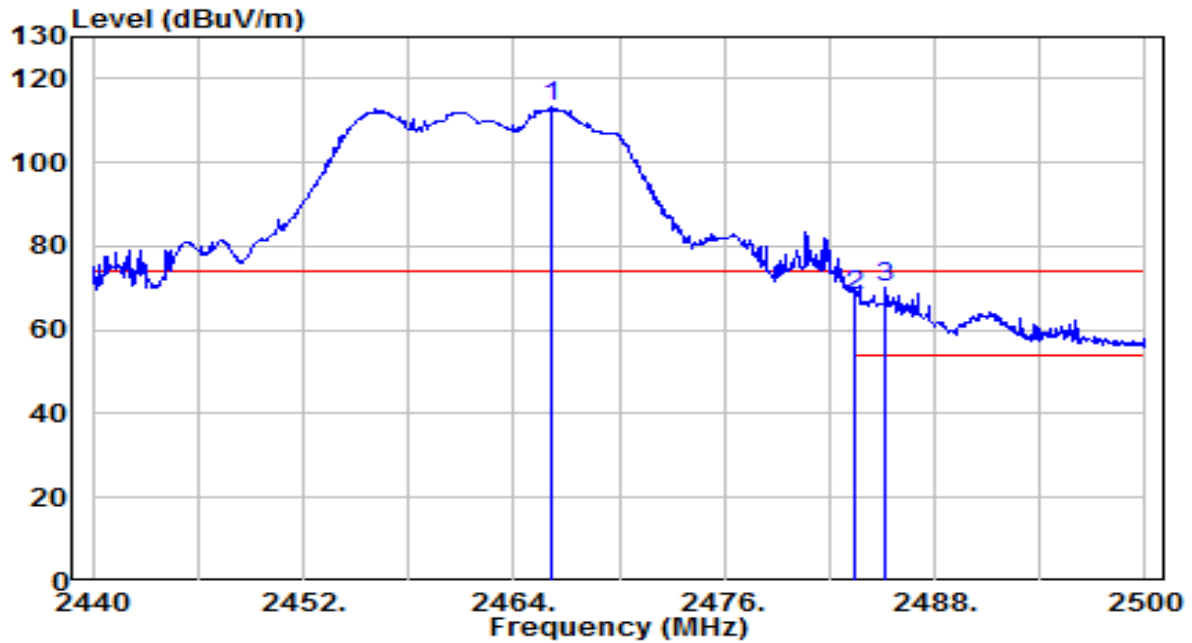


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.220	82.22	30.85	113.08	N/A	N/A	125	275	Peak
2	2483.500	37.31	30.91	68.22	-5.78	74.00	125	275	Peak
3	* 2485.240	39.06	30.92	69.98	-4.02	74.00	125	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

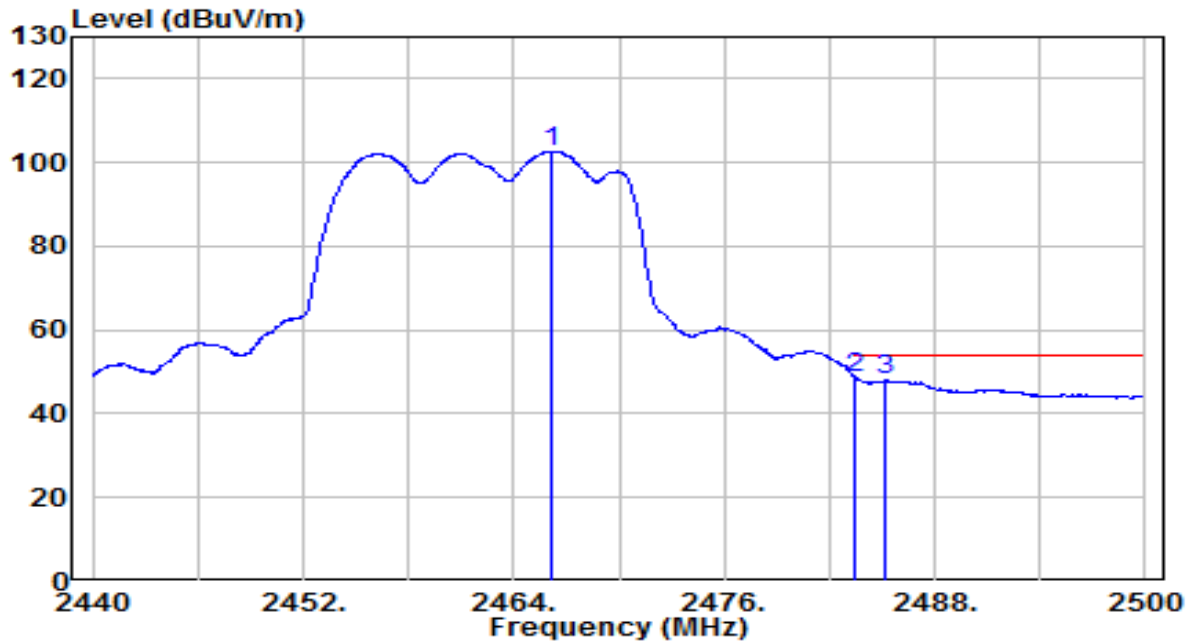


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2466.100	71.76	30.85	102.62	N/A	N/A	125	275	Average
2	*	2483.500	17.58	30.91	48.49	-5.51	54.00	125	275	Average
3		2485.180	17.05	30.92	47.97	-6.03	54.00	125	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

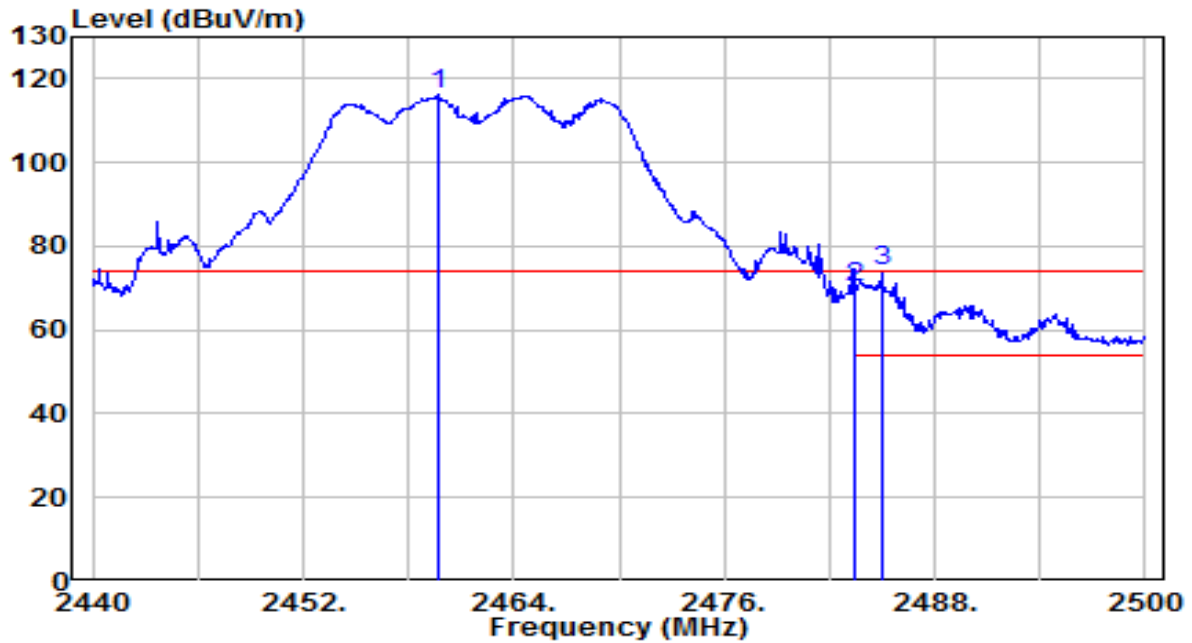


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.680	85.21	30.83	116.04	N/A	N/A	130	165	Peak
2	2483.500	39.04	30.91	69.95	-4.05	74.00	130	165	Peak
3	* 2484.940	42.98	30.92	73.90	-0.10	74.00	130	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

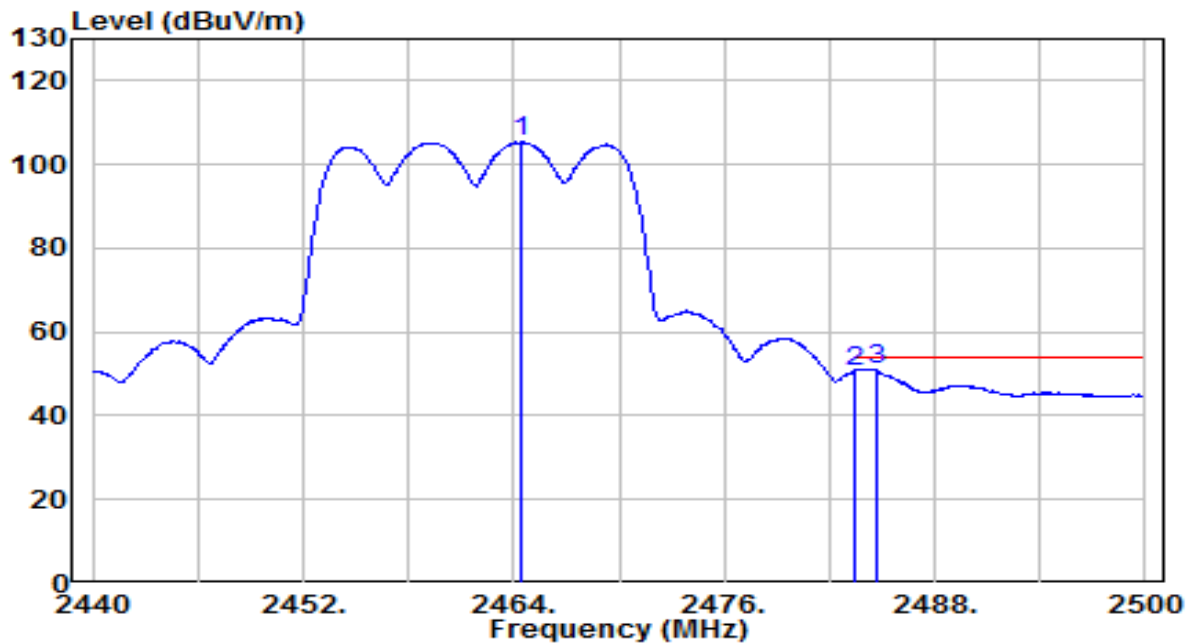


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.360	74.45	30.85	105.30	N/A	N/A	130	165	Average
2	2483.500	19.72	30.91	50.63	-3.37	54.00	130	165	Average
3	* 2484.640	20.06	30.92	50.98	-3.02	54.00	130	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

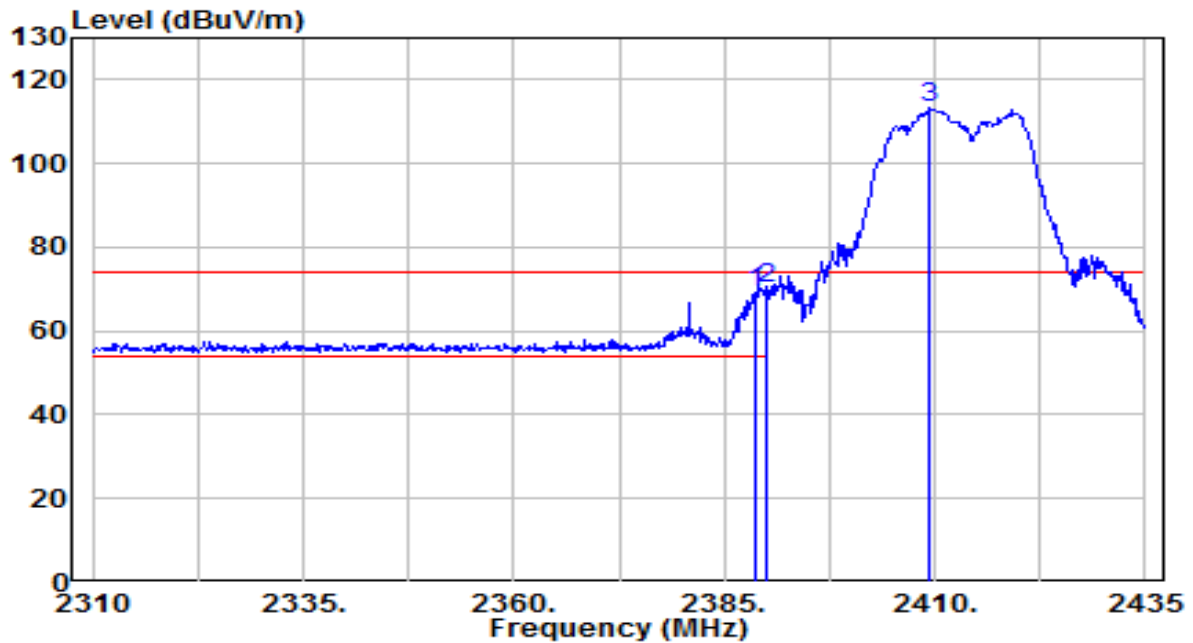


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.625	38.39	30.61	69.00	-5.00	74.00	360	180	Peak
2	*	2390.000	39.43	30.61	70.04	-3.96	74.00	360	180	Peak
3		2409.500	82.71	30.66	113.37	N/A	N/A	360	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

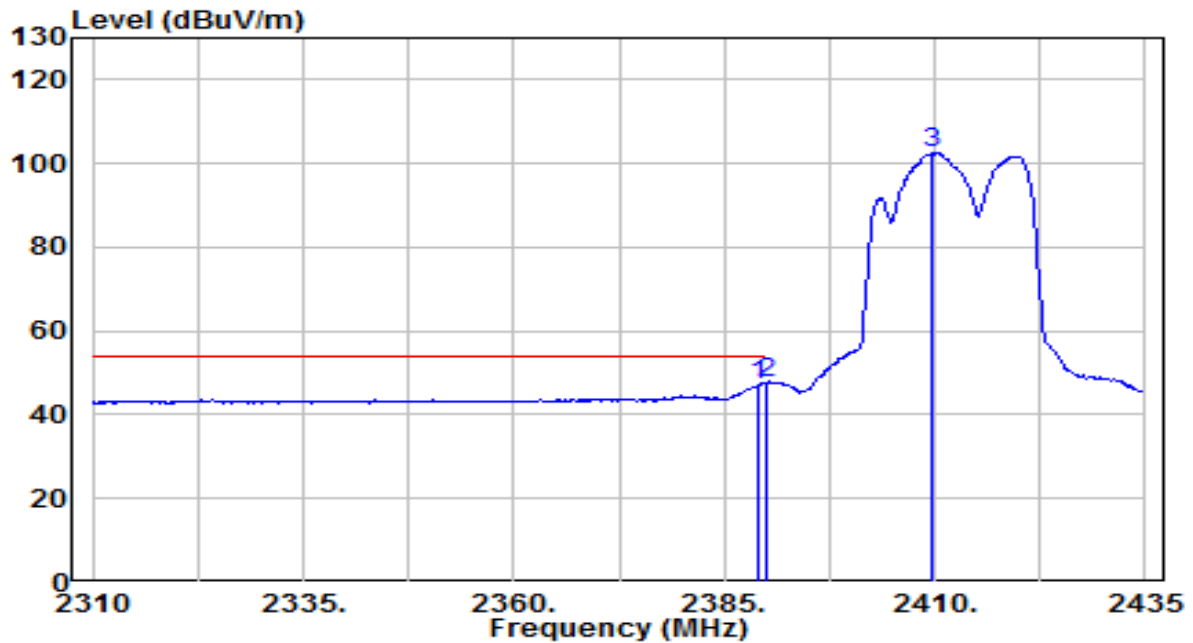


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	16.41	30.61	47.02	-6.98	54.00	360	180	Average
2	*	2390.000	17.08	30.61	47.69	-6.31	54.00	360	180	Average
3		2409.750	71.73	30.66	102.39	N/A	N/A	360	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

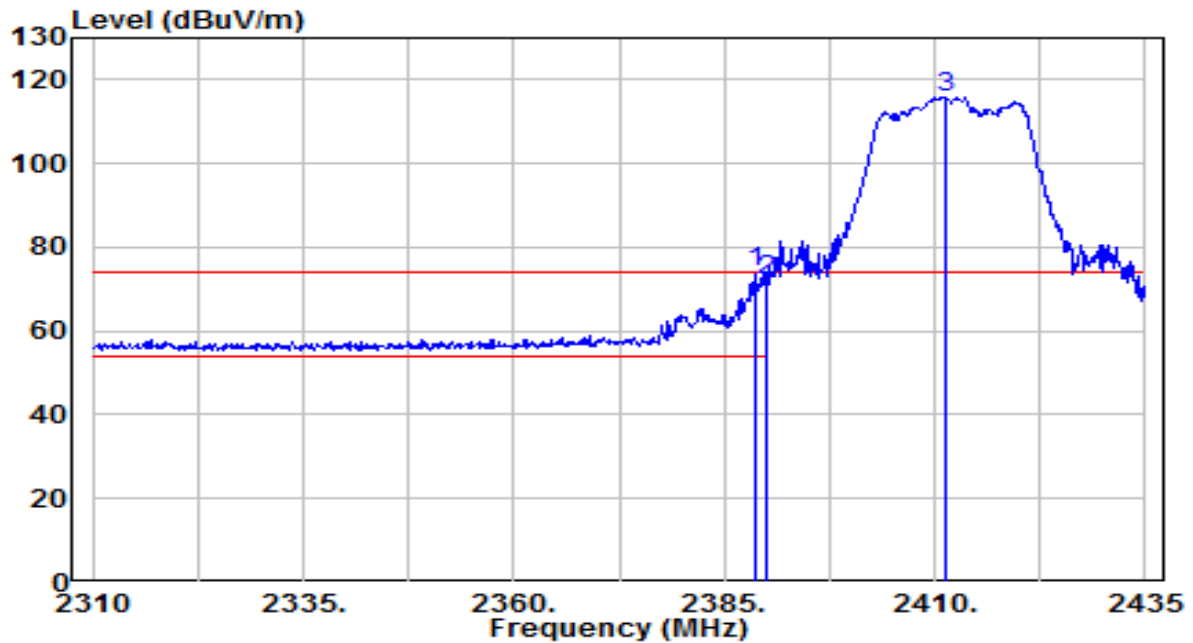


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.625	43.23	30.61	73.84	-0.16	74.00	200	310	Peak
2		2390.000	41.37	30.61	71.99	-2.01	74.00	200	310	Peak
3		2411.375	85.12	30.67	115.79	N/A	N/A	200	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

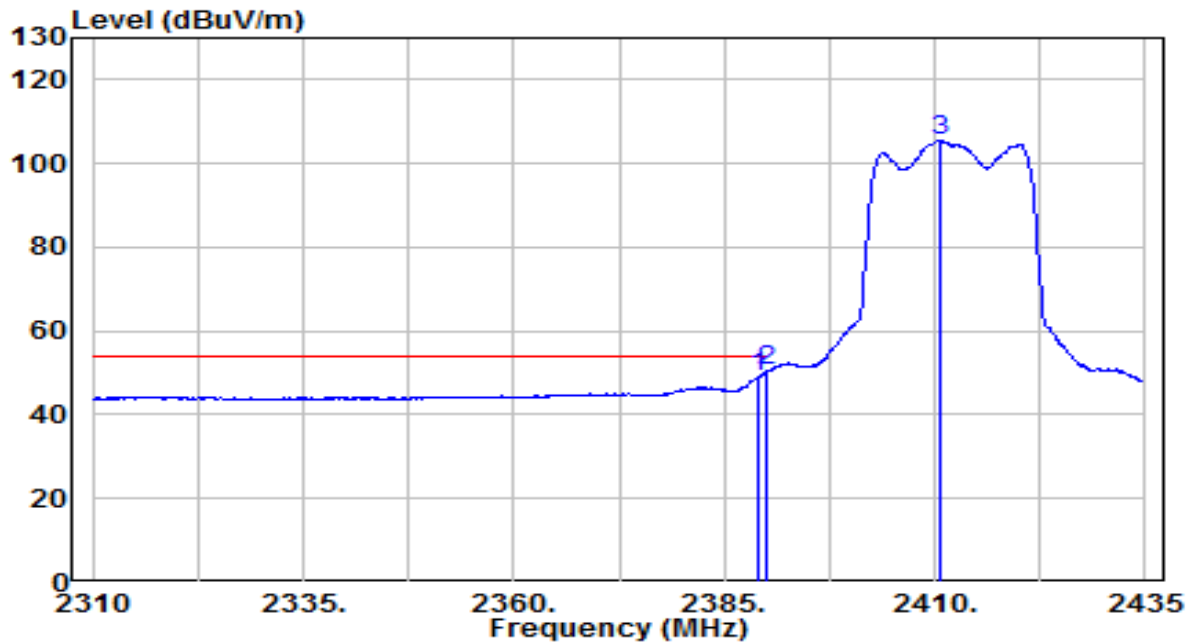


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	18.37	30.61	48.98	-5.02	54.00	200	310	Average
2	*	2390.000	19.70	30.61	50.31	-3.69	54.00	200	310	Average
3		2410.750	74.99	30.66	105.65	N/A	N/A	200	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

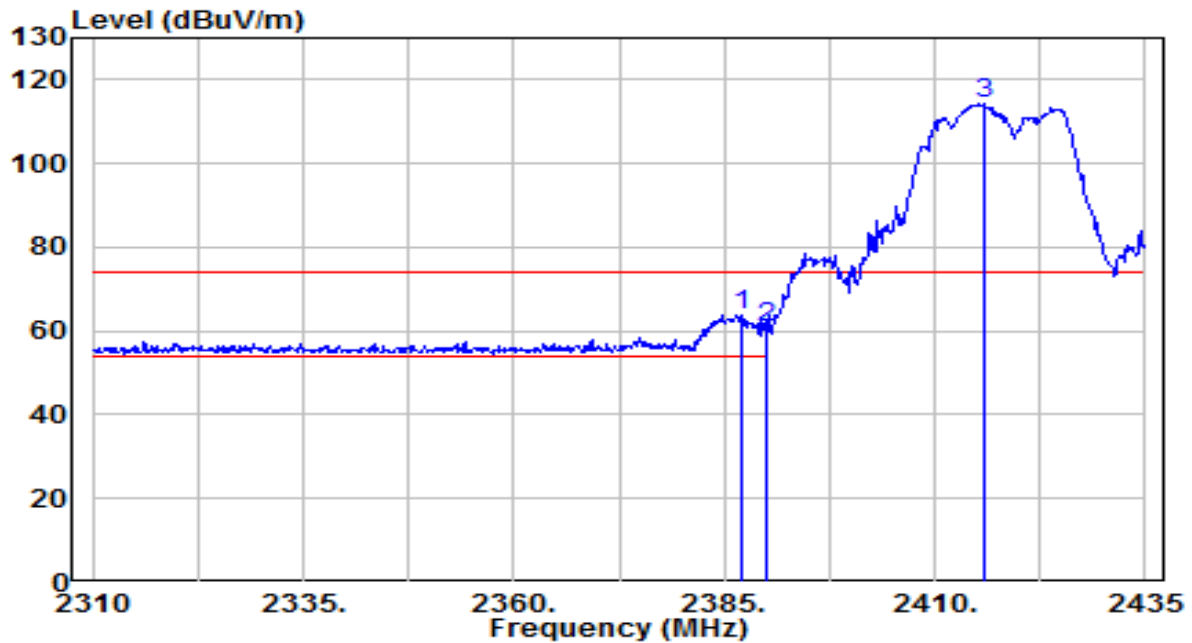


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	33.29	30.61	63.90	-10.10	74.00	400	185	Peak
2		2390.000	30.03	30.61	60.65	-13.35	74.00	400	185	Peak
3		2415.875	83.58	30.68	114.27	N/A	N/A	400	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

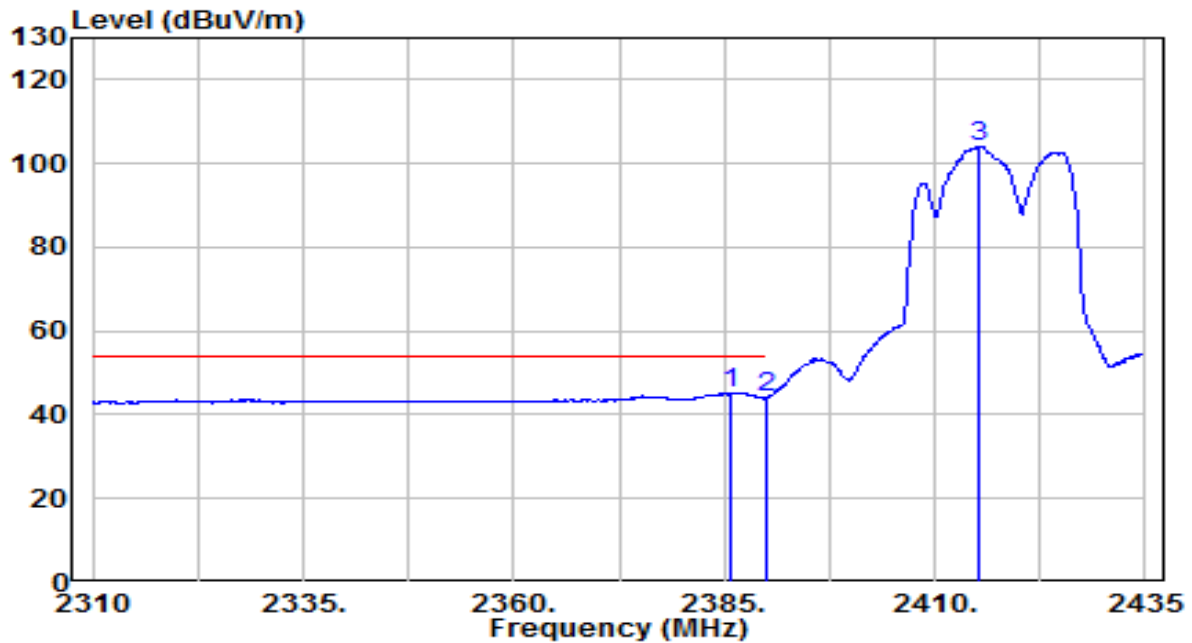


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.875	14.62	30.61	45.23	-8.77	54.00	400	185	Average
2		2390.000	13.39	30.61	44.00	-10.00	54.00	400	185	Average
3		2415.125	73.31	30.68	103.99	N/A	N/A	400	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

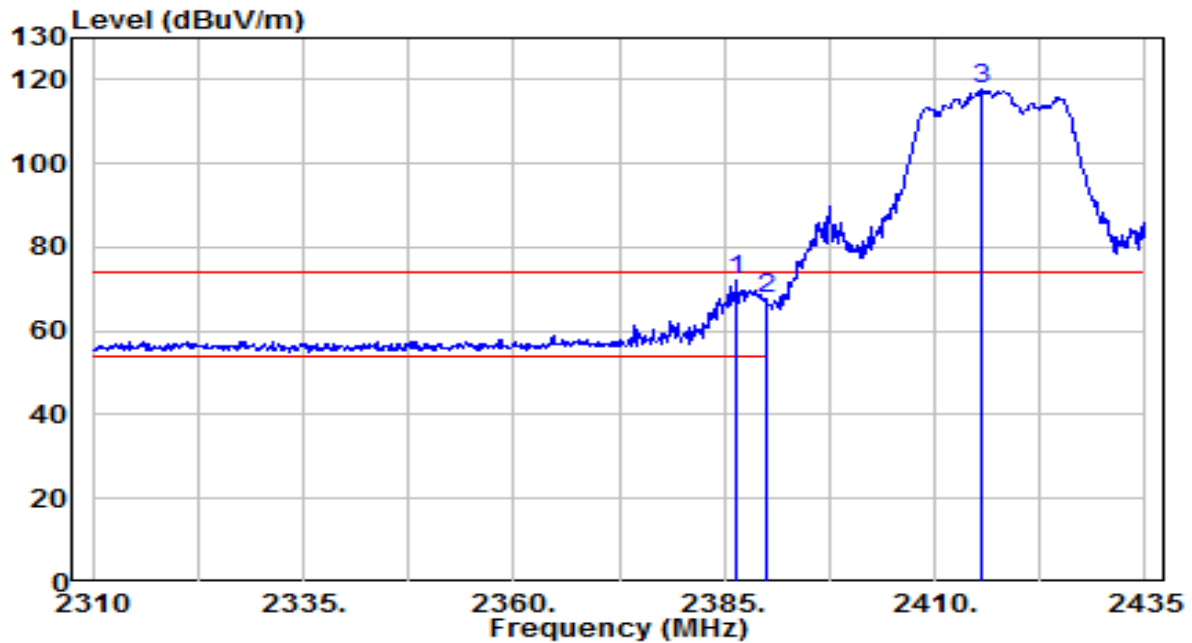


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.500	41.72	30.61	72.33	-1.67	74.00	220	320	Peak
2		2390.000	36.88	30.61	67.49	-6.51	74.00	220	320	Peak
3		2415.500	86.97	30.68	117.65	N/A	N/A	220	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

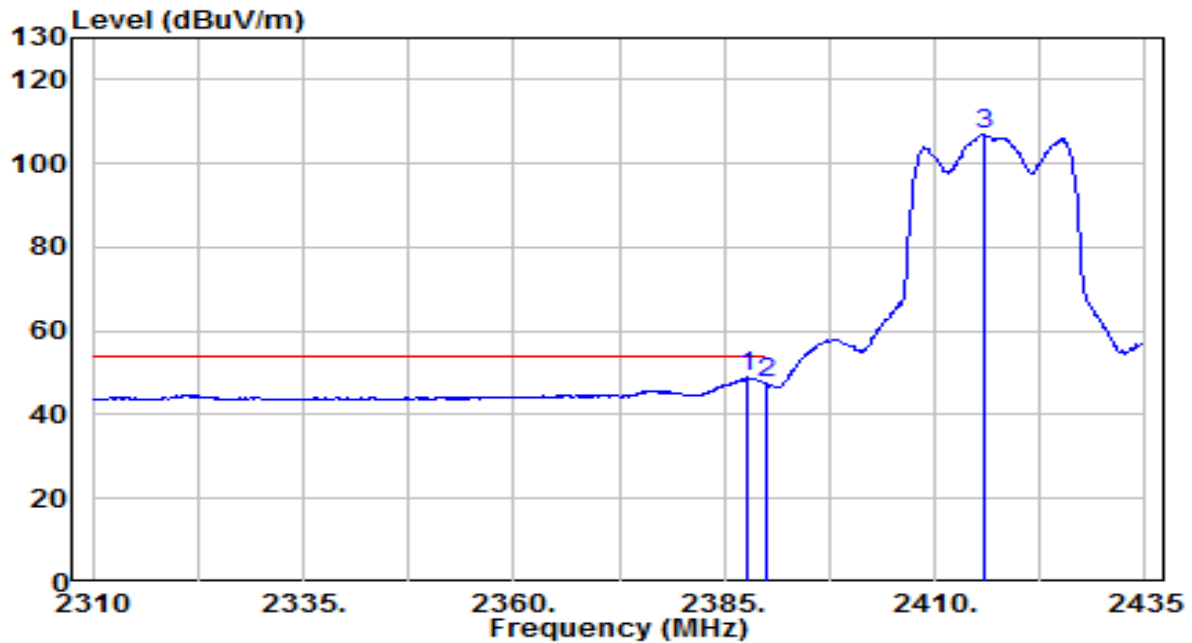


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	18.23	30.61	48.84	-5.16	54.00	220	320	Average
2		2390.000	16.94	30.61	47.56	-6.44	54.00	220	320	Average
3		2415.750	76.36	30.68	107.04	N/A	N/A	220	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

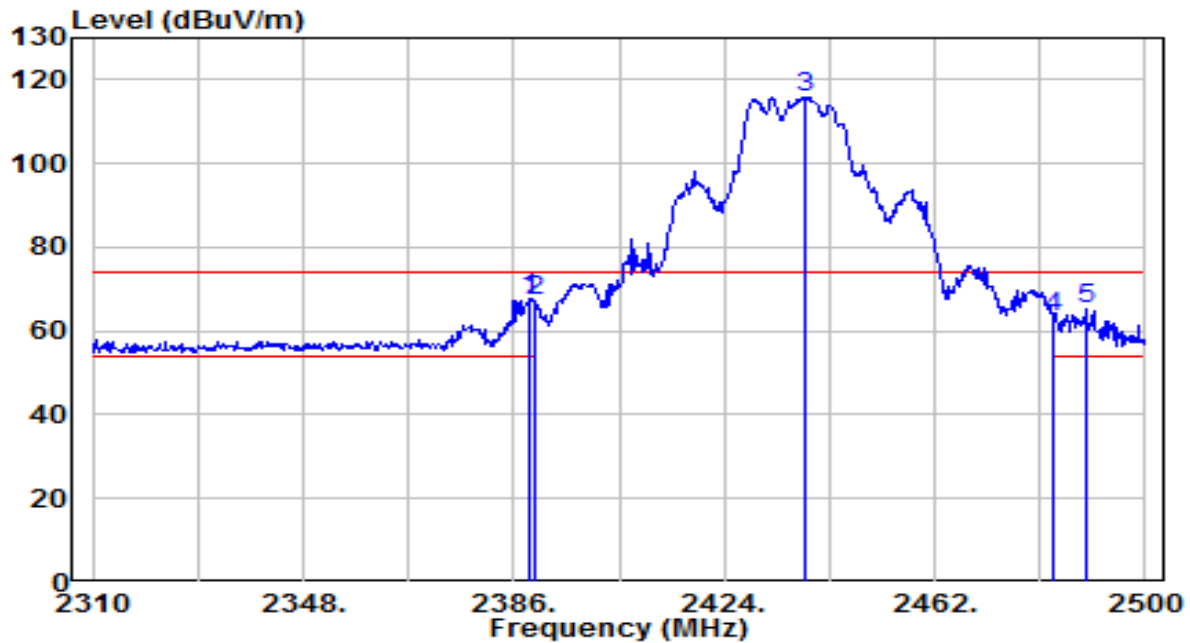


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	37.32	30.61	67.93	-6.07	74.00	160	305	Peak
2		2390.000	36.41	30.61	67.03	-6.97	74.00	160	305	Peak
3		2438.630	85.23	30.76	115.99	N/A	N/A	160	305	Peak
4		2483.500	32.14	30.91	63.05	-10.95	74.00	160	305	Peak
5		2489.170	34.52	30.93	65.45	-8.55	74.00	160	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

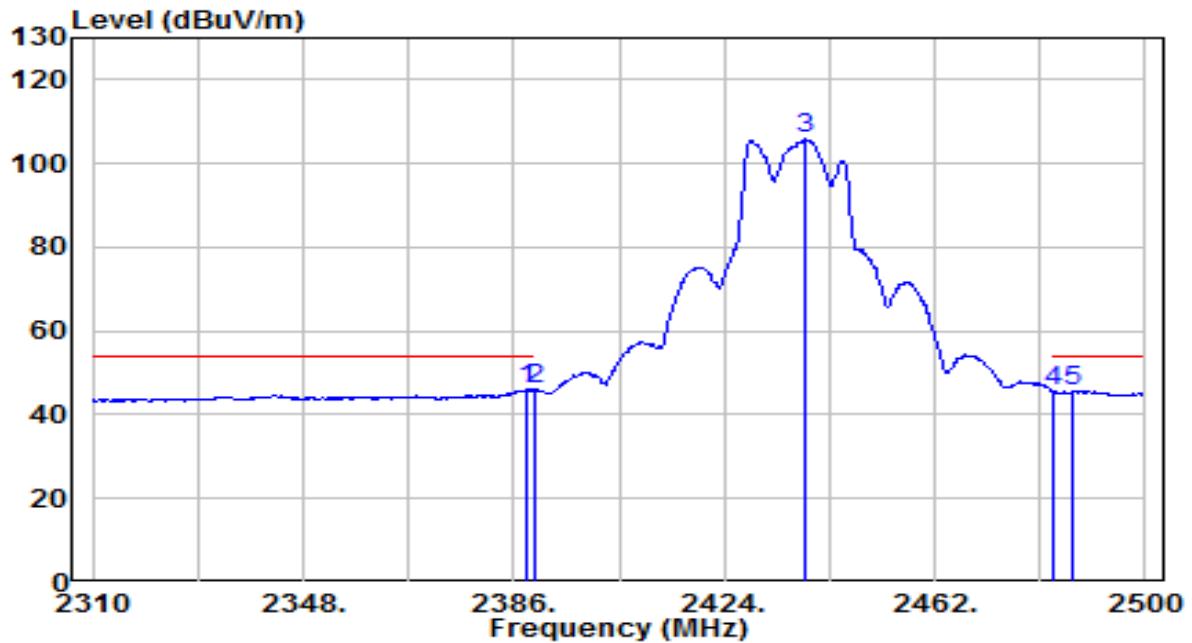


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.280	15.39	30.61	46.00	-8.00	54.00	160	305	Average
2		2390.000	15.37	30.61	45.98	-8.02	54.00	160	305	Average
3		2438.440	75.14	30.76	105.90	N/A	N/A	160	305	Average
4		2483.500	14.70	30.91	45.61	-8.39	54.00	160	305	Average
5		2486.890	14.65	30.93	45.57	-8.43	54.00	160	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

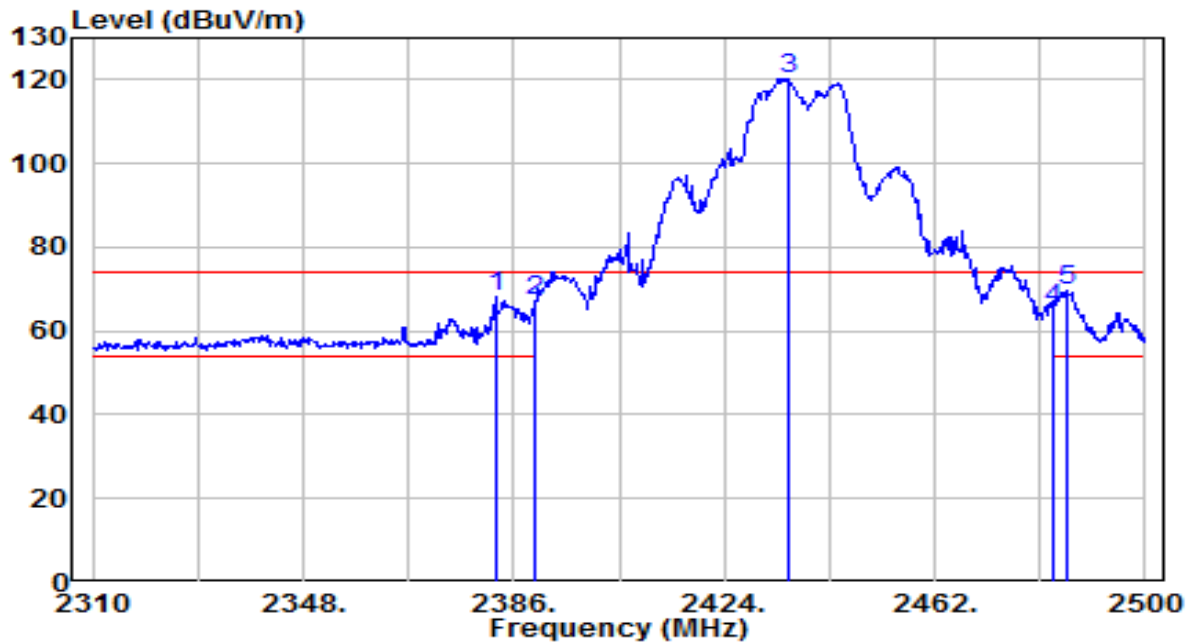


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.770	37.79	30.60	68.39	-5.61	74.00	135	185	Peak
2	2390.000	36.43	30.61	67.05	-6.95	74.00	135	185	Peak
3	2435.400	89.65	30.75	120.40	N/A	N/A	135	185	Peak
4	2483.500	34.13	30.91	65.04	-8.96	74.00	135	185	Peak
5	* 2485.750	38.83	30.92	69.75	-4.25	74.00	135	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

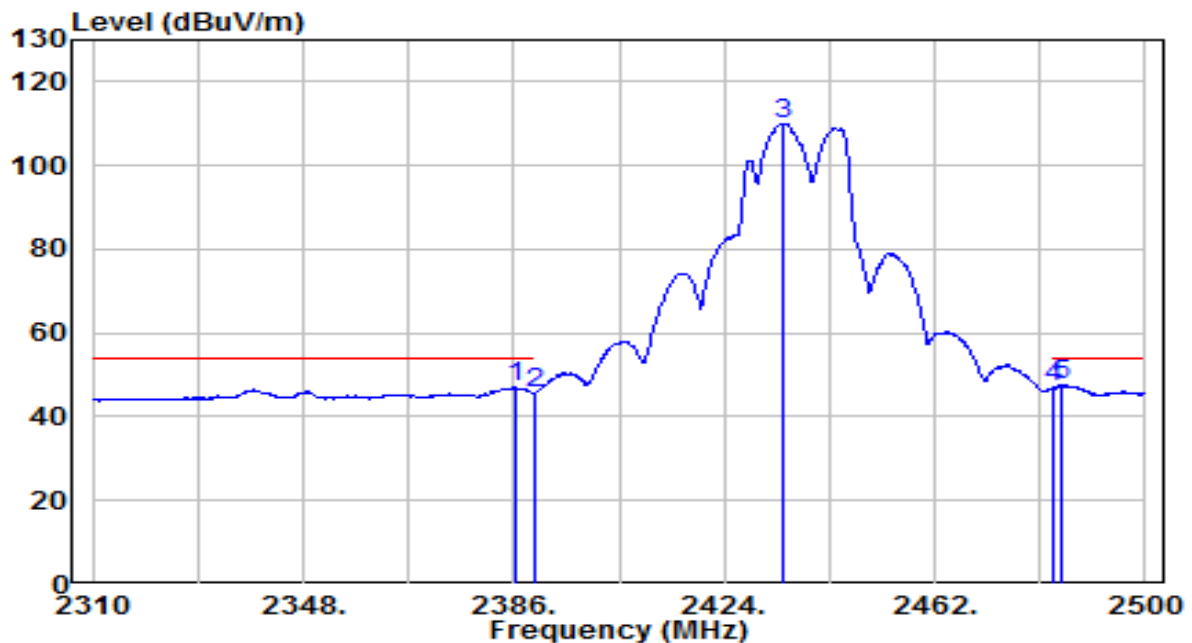


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	16.26	30.61	46.87	-7.13	54.00	135	185	Average
2	2390.000	15.14	30.61	45.76	-8.24	54.00	135	185	Average
3	2434.450	79.26	30.75	110.00	N/A	N/A	135	185	Average
4	2483.500	16.07	30.91	46.98	-7.02	54.00	135	185	Average
5	* 2484.800	16.67	30.92	47.59	-6.41	54.00	135	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

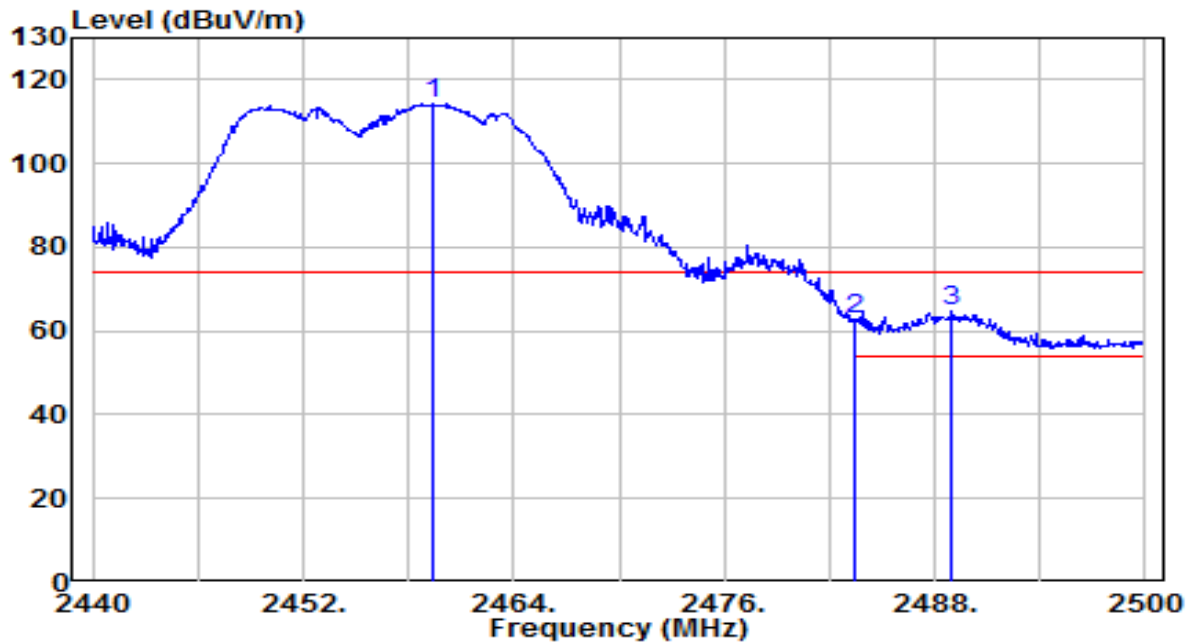


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.380	83.34	30.83	114.17	N/A	N/A	200	190	Peak
2	2483.500	31.69	30.91	62.61	-11.39	74.00	200	190	Peak
3	* 2488.960	33.72	30.93	64.65	-9.35	74.00	200	190	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

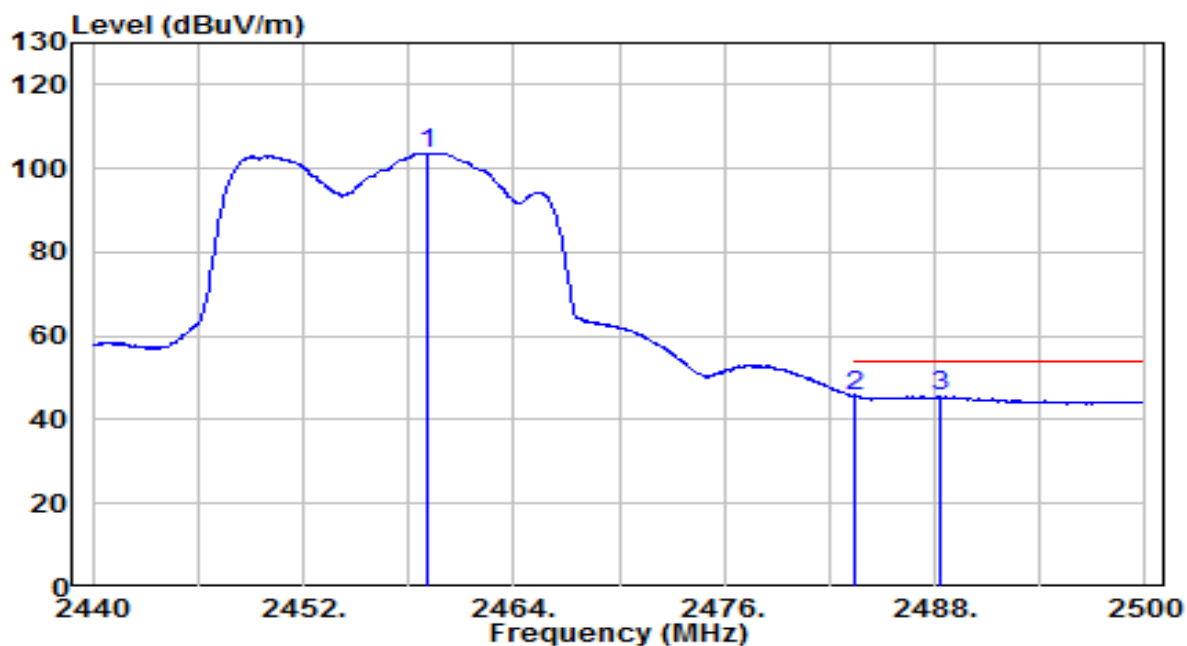


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.020	72.86	30.83	103.69	N/A	N/A	200	190	Average
2	*	2483.500	14.95	30.91	45.87	-8.13	54.00	200	190	Average
3		2488.360	14.58	30.93	45.51	-8.49	54.00	200	190	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

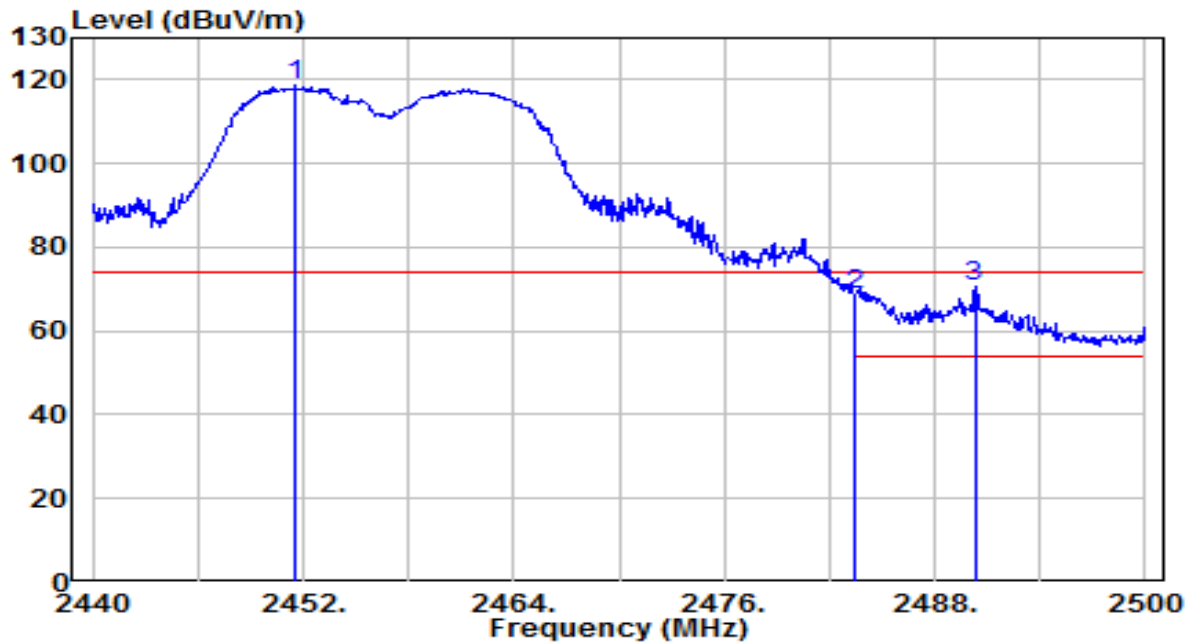


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.520	87.81	30.80	118.62	N/A	N/A	215	320	Peak
2	2483.500	37.67	30.91	68.58	-5.42	74.00	215	320	Peak
3	* 2490.280	39.93	30.94	70.86	-3.14	74.00	215	320	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

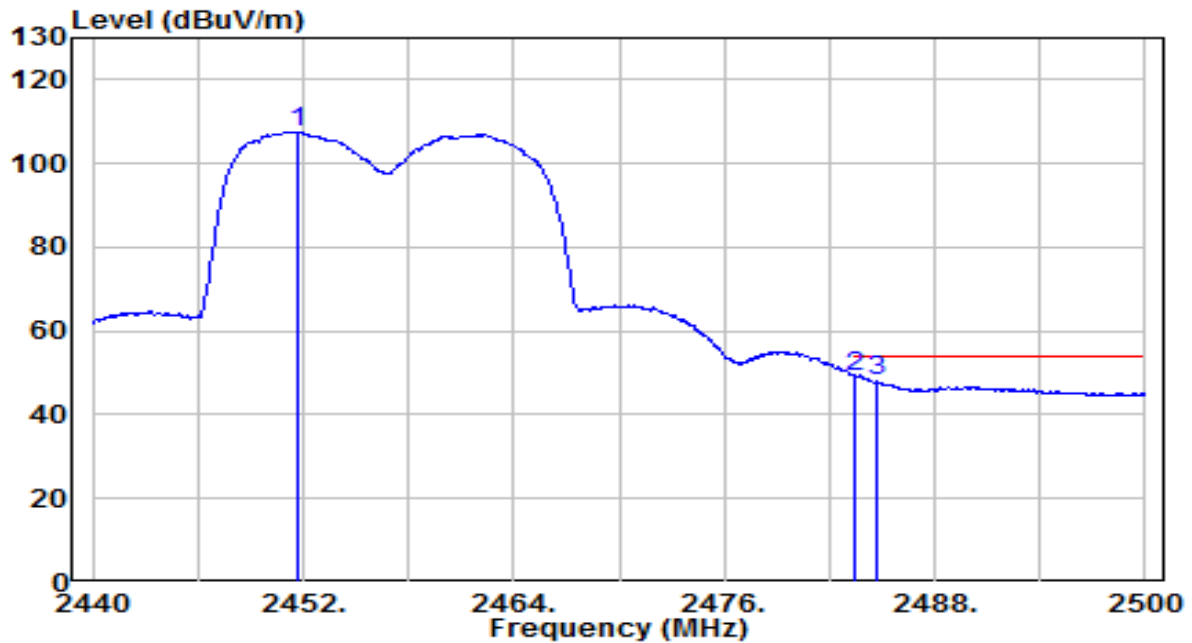


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2451.700	76.80	30.80	107.61	N/A	N/A	215	320	Average
2	*	2483.500	18.38	30.91	49.30	-4.70	54.00	215	320	Average
3		2484.760	16.95	30.92	47.87	-6.13	54.00	215	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

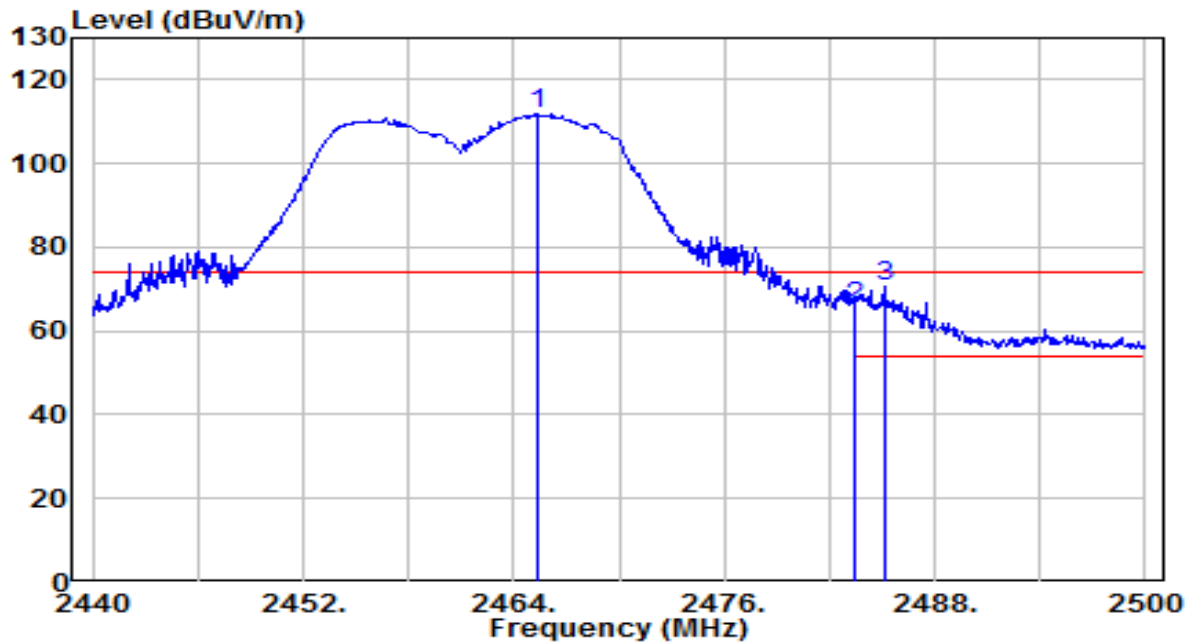


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.440	81.23	30.85	112.08	N/A	N/A	125	275	Peak
2	2483.500	35.06	30.91	65.97	-8.03	74.00	125	275	Peak
3	* 2485.120	39.77	30.92	70.69	-3.31	74.00	125	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

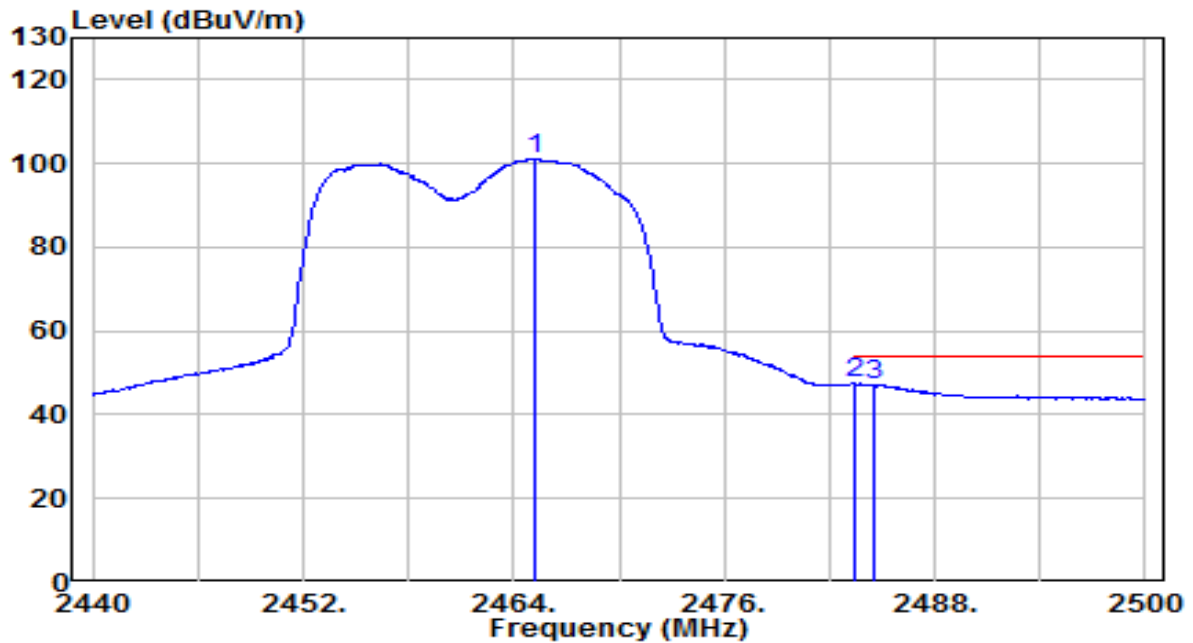


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2465.260	70.43	30.85	101.28	N/A	N/A	125	275	Average
2	*	2483.500	16.46	30.91	47.37	-6.63	54.00	125	275	Average
3		2484.580	16.15	30.92	47.07	-6.93	54.00	125	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

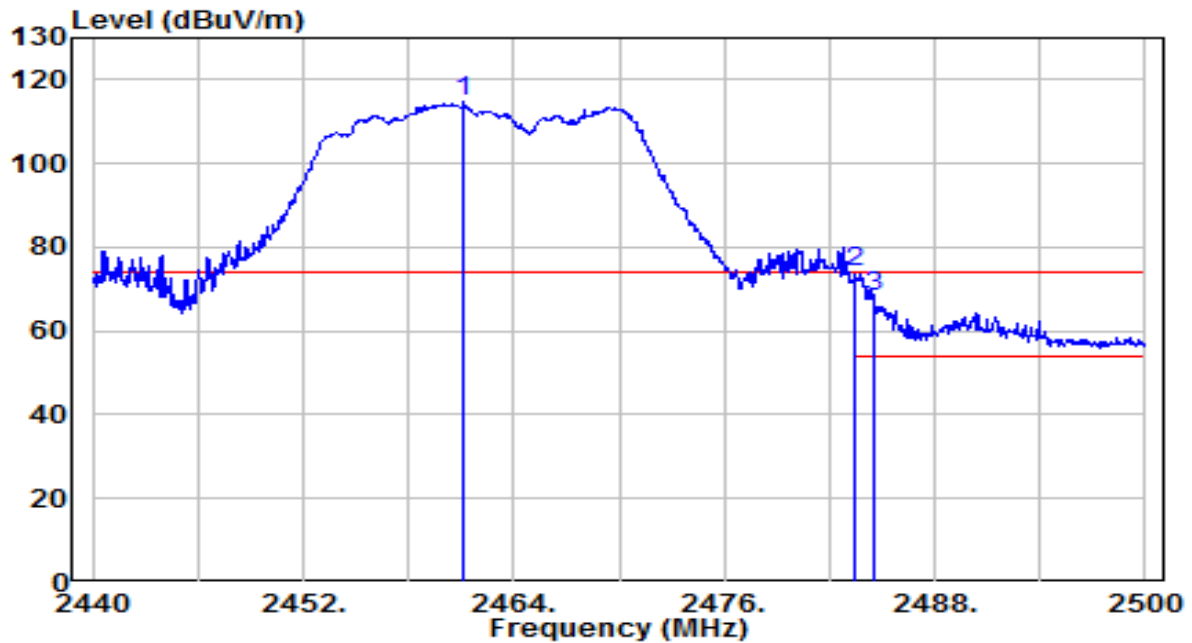


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.120	83.87	30.84	114.70	N/A	N/A	135	185	Peak
2	* 2483.500	42.92	30.91	73.83	-0.17	74.00	135	185	Peak
3	2484.520	37.18	30.92	68.10	-5.90	74.00	135	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

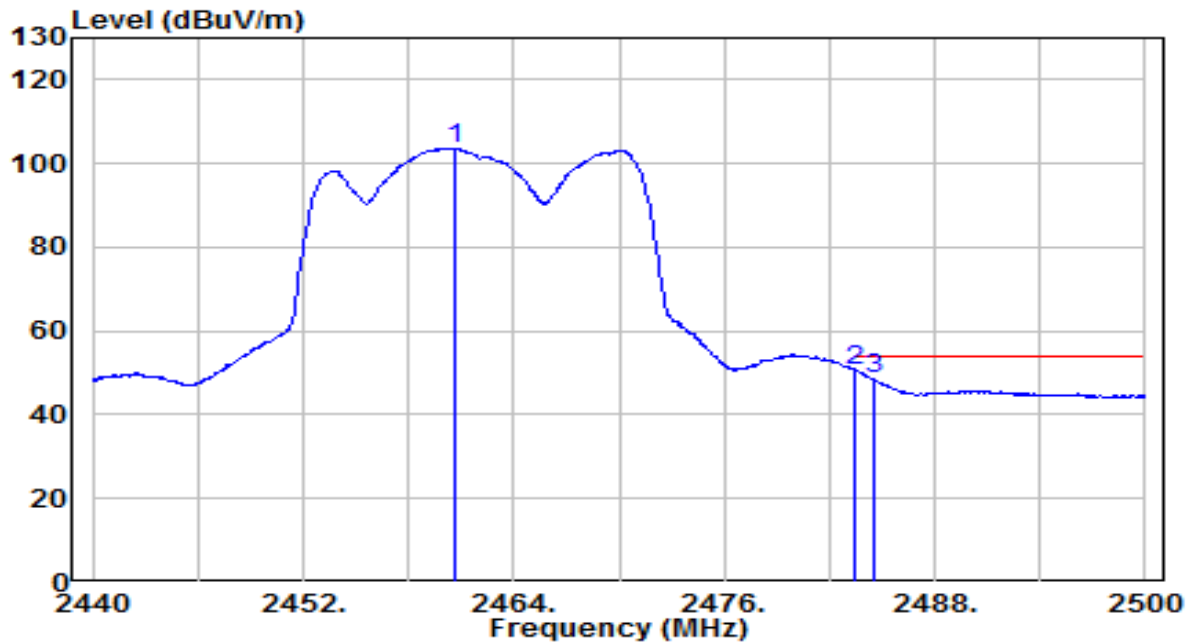


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.580	72.89	30.84	103.73	N/A	N/A	135	185	Average
2	*	2483.500	19.74	30.91	50.65	-3.35	54.00	135	185	Average
3		2484.580	17.56	30.92	48.48	-5.52	54.00	135	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

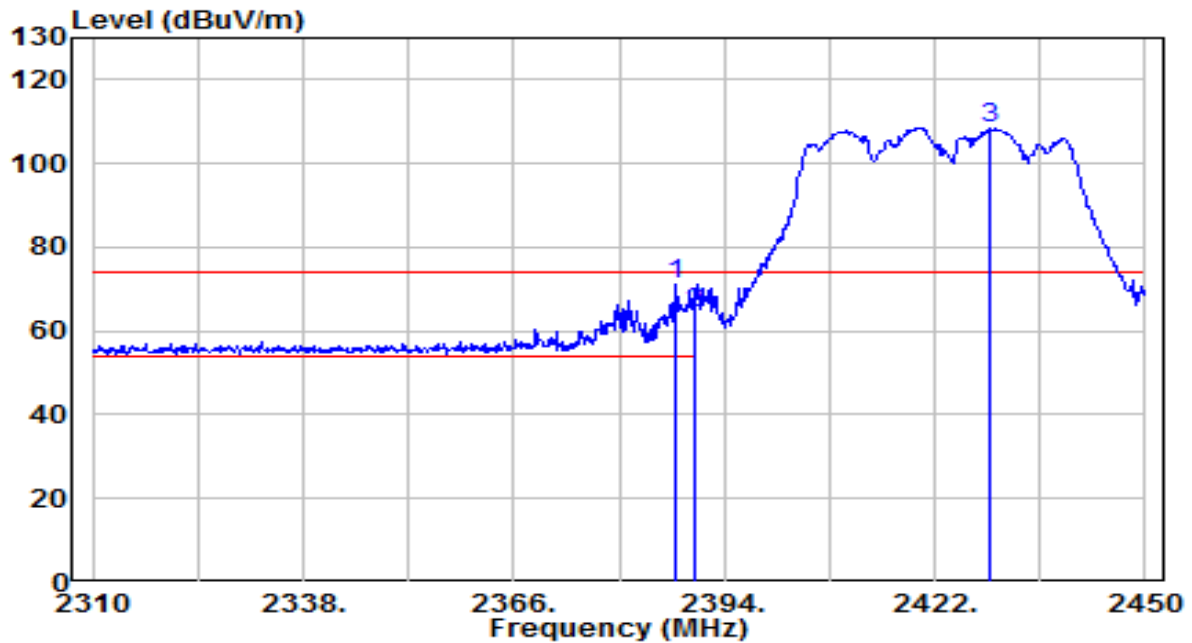

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.700	40.70	30.61	71.31	-2.69	74.00	315	180	Peak
2		2390.000	33.87	30.61	64.48	-9.52	74.00	315	180	Peak
3		2429.420	77.83	30.73	108.56	N/A	N/A	315	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.