


EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

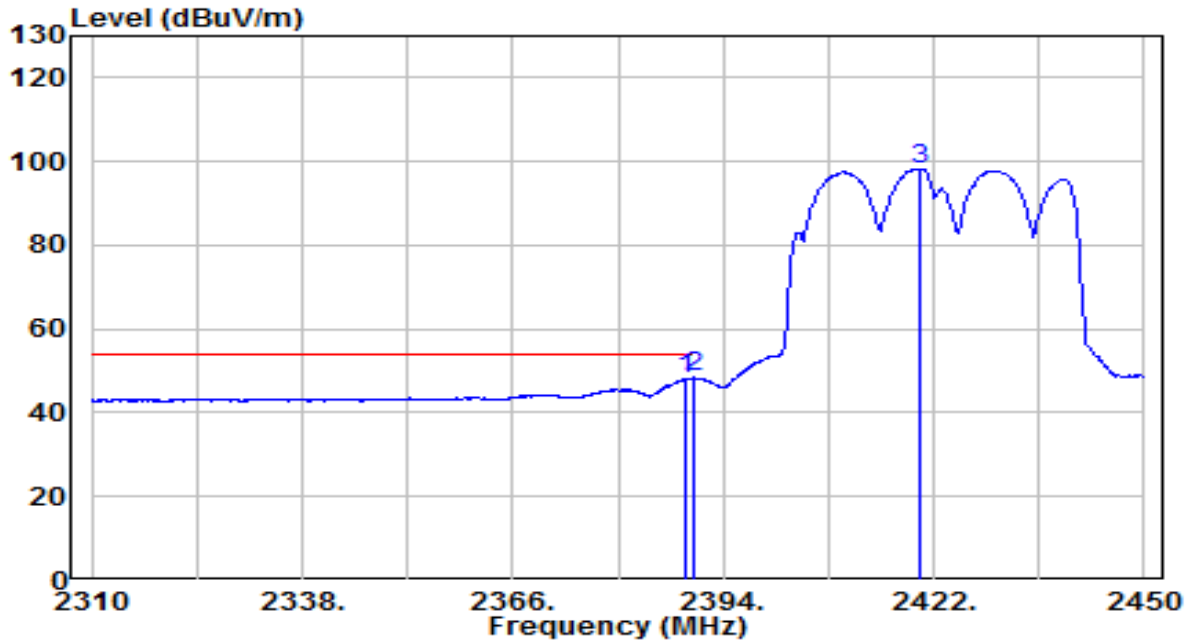


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.820	17.48	30.61	48.09	-5.91	54.00	315	180	Average
2	* 2390.000	17.77	30.61	48.38	-5.62	54.00	315	180	Average
3	2420.040	67.49	30.70	98.19	N/A	N/A	315	180	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

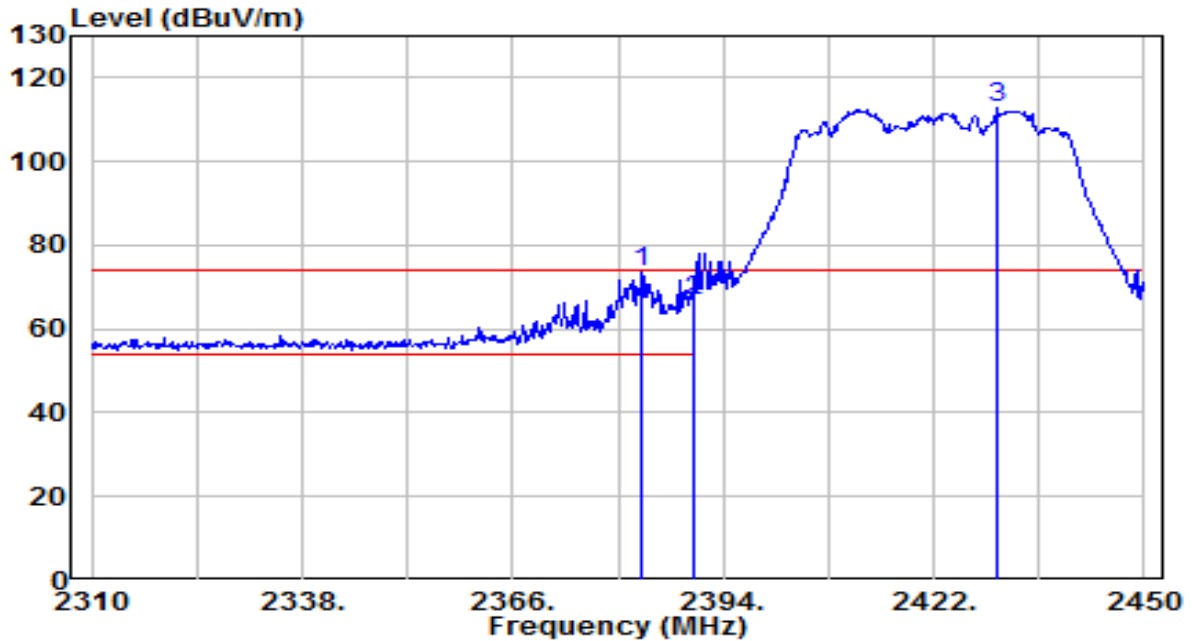


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2383.220	43.23	30.60	73.83	-0.17	74.00	185	325	Peak
2	2390.000	36.28	30.61	66.89	-7.11	74.00	185	325	Peak
3	2430.400	82.14	30.73	112.87	N/A	N/A	185	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

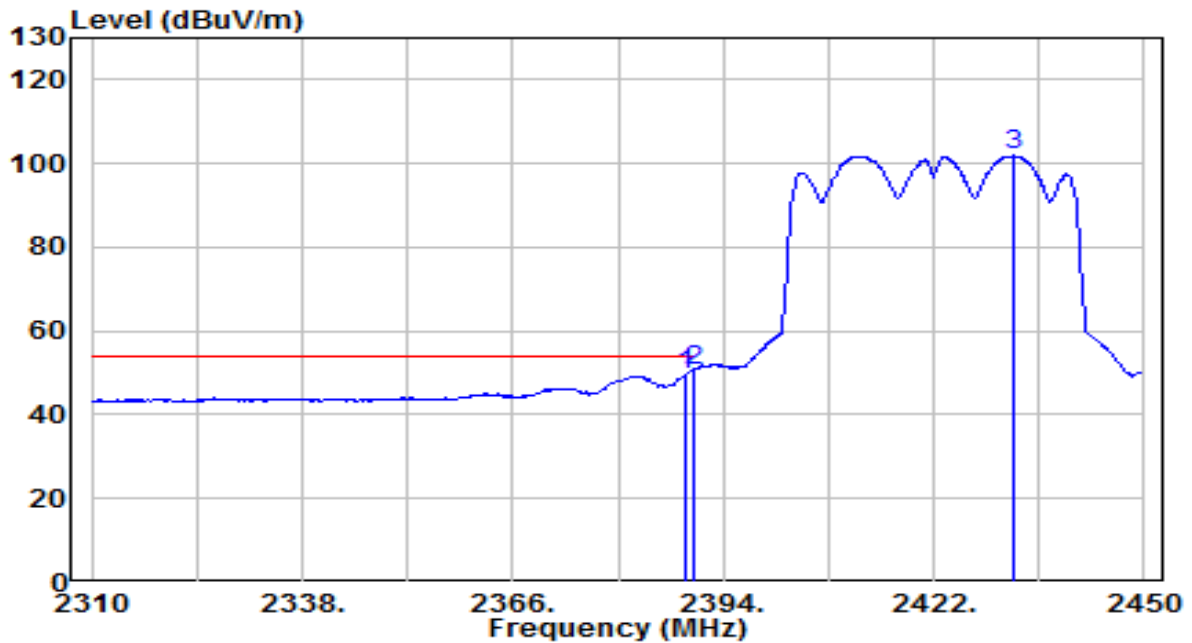


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	19.04	30.61	49.65	-4.35	54.00	185	325	Average
2	* 2390.000	19.99	30.61	50.60	-3.40	54.00	185	325	Average
3	2432.640	71.11	30.74	101.85	N/A	N/A	185	325	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

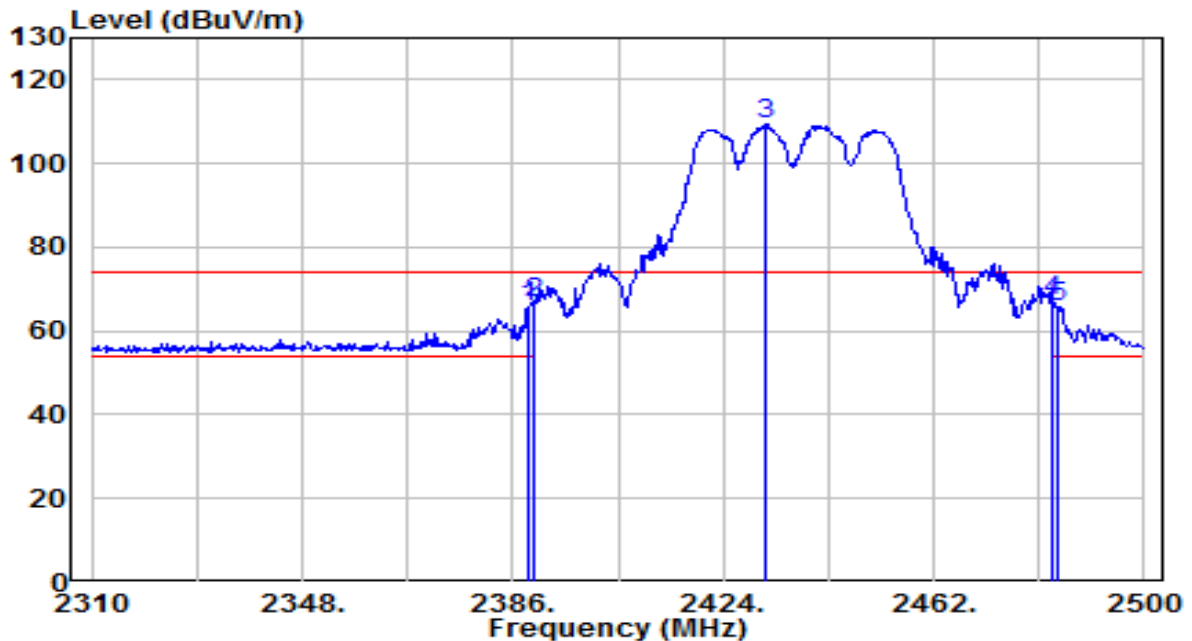


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	35.31	30.61	65.92	-8.08	74.00	185	330	Peak
2	2390.000	36.11	30.61	66.72	-7.28	74.00	185	330	Peak
3	2431.790	78.83	30.74	109.57	N/A	N/A	185	330	Peak
4	* 2483.500	36.42	30.91	67.33	-6.67	74.00	185	330	Peak
5	2484.230	35.04	30.92	65.96	-8.04	74.00	185	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

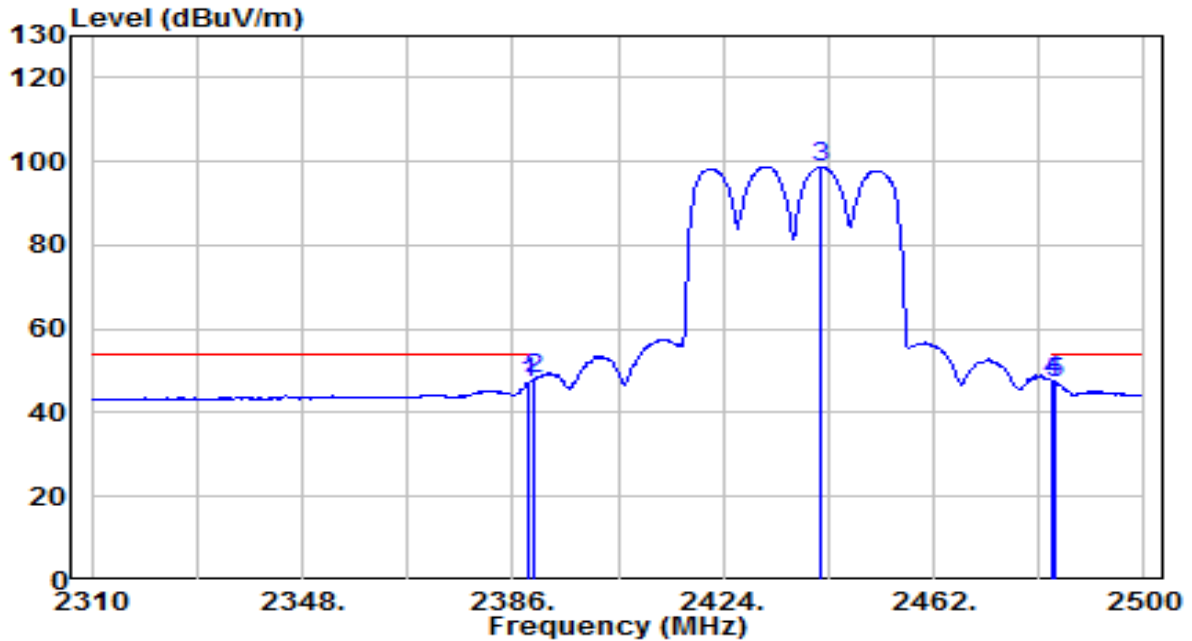


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	16.52	30.61	47.13	-6.87	54.00	185	330	Average
2	* 2390.000	17.33	30.61	47.94	-6.06	54.00	185	330	Average
3	2441.480	68.04	30.77	98.81	N/A	N/A	185	330	Average
4	2483.500	16.77	30.91	47.68	-6.32	54.00	185	330	Average
5	2484.040	16.28	30.92	47.20	-6.80	54.00	185	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

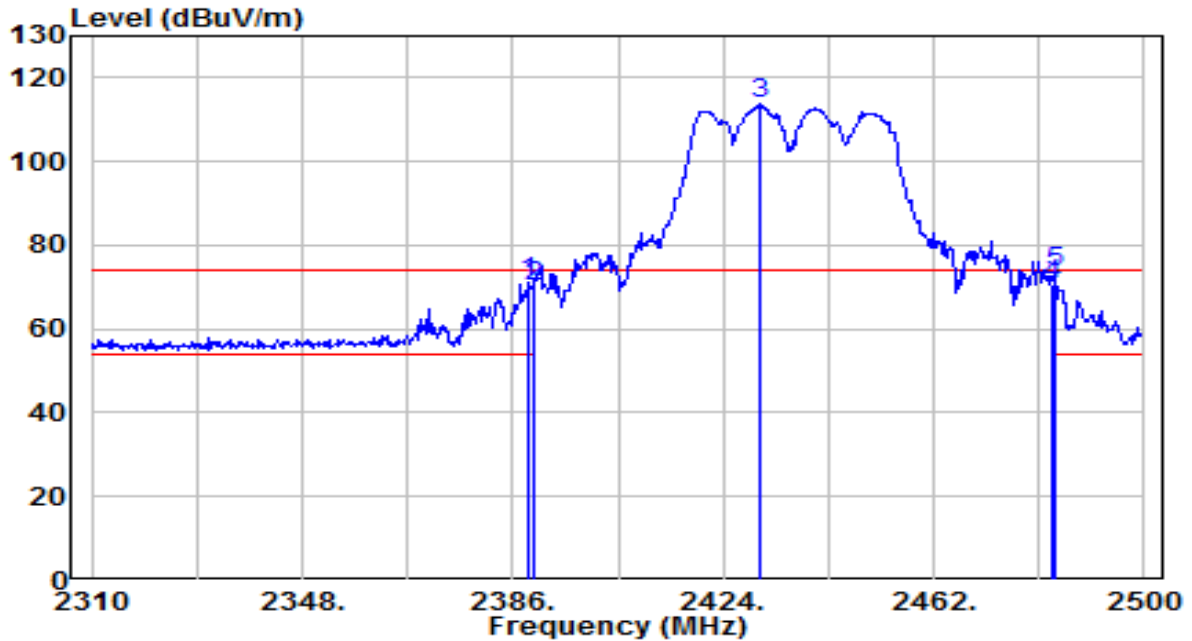


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	40.29	30.61	70.91	-3.09	74.00	135	185	Peak
2	2390.000	39.66	30.61	70.27	-3.73	74.00	135	185	Peak
3	2430.460	83.08	30.73	113.81	N/A	N/A	135	185	Peak
4	2483.500	39.83	30.91	70.75	-3.25	74.00	135	185	Peak
5	* 2484.040	42.90	30.92	73.82	-0.18	74.00	135	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

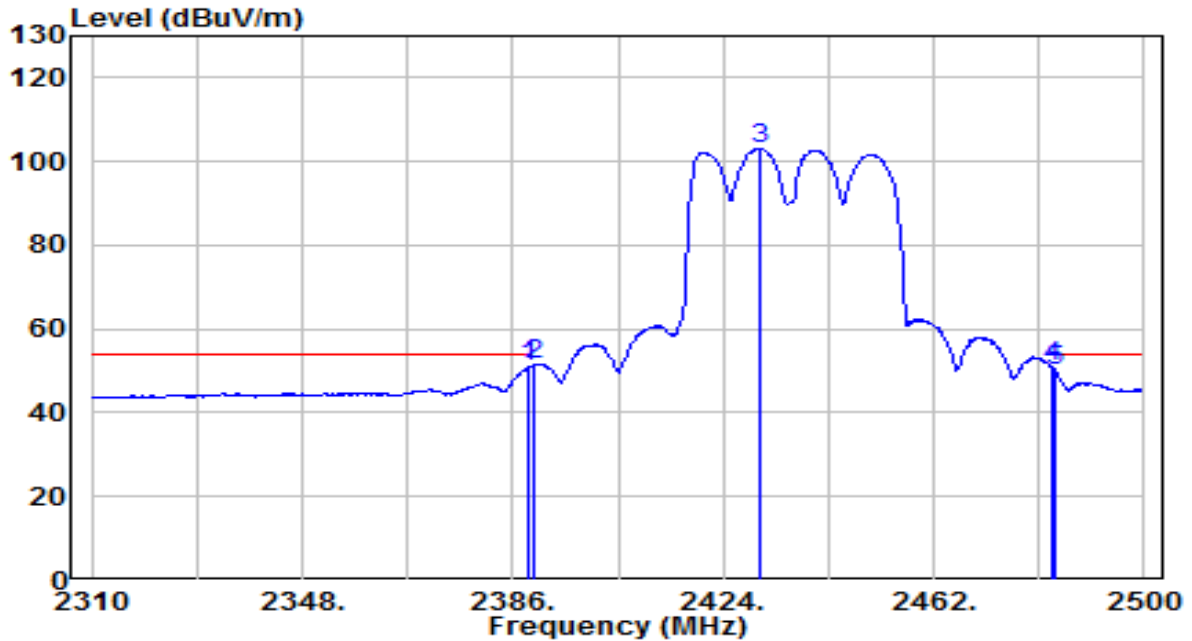


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	20.29	30.61	50.90	-3.10	54.00	135	185	Average
2	* 2390.000	20.78	30.61	51.39	-2.61	54.00	135	185	Average
3	2430.460	72.38	30.73	103.11	N/A	N/A	135	185	Average
4	2483.500	19.96	30.91	50.88	-3.12	54.00	135	185	Average
5	2484.040	19.15	30.92	50.06	-3.94	54.00	135	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

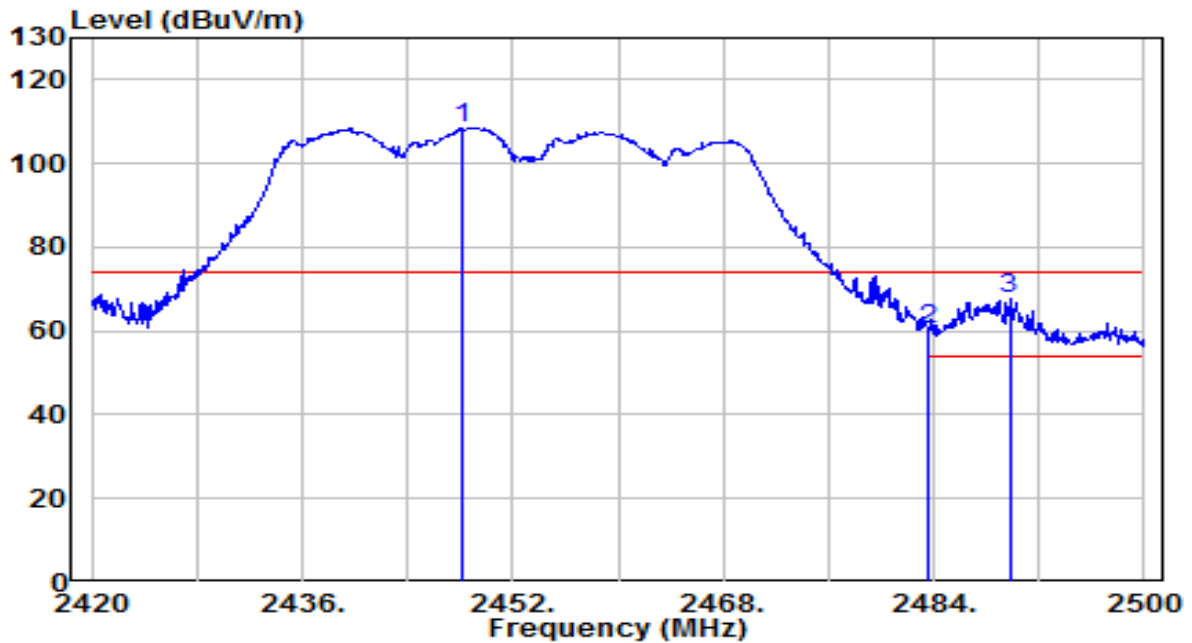


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.240	77.78	30.79	108.58	N/A	N/A	210	195	Peak
2	2483.500	29.66	30.91	60.57	-13.43	74.00	210	195	Peak
3	* 2489.760	36.63	30.93	67.56	-6.44	74.00	210	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

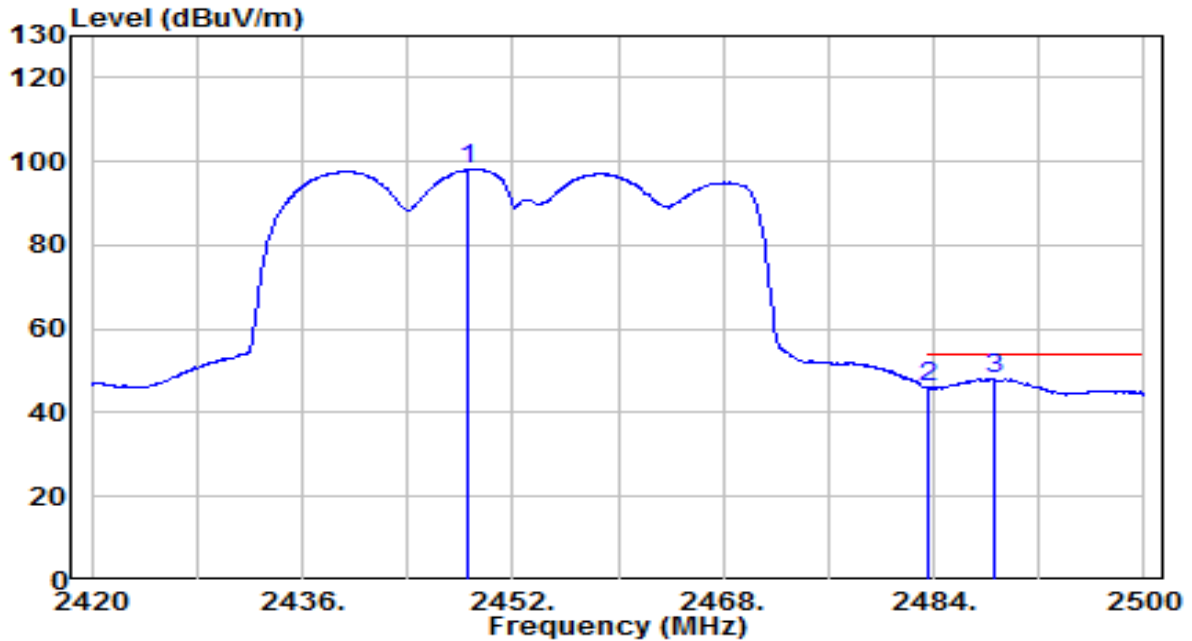


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.560	67.44	30.79	98.23	N/A	N/A	210	195	Average
2	2483.500	15.15	30.91	46.06	-7.94	54.00	210	195	Average
3	* 2488.560	17.26	30.93	48.19	-5.81	54.00	210	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

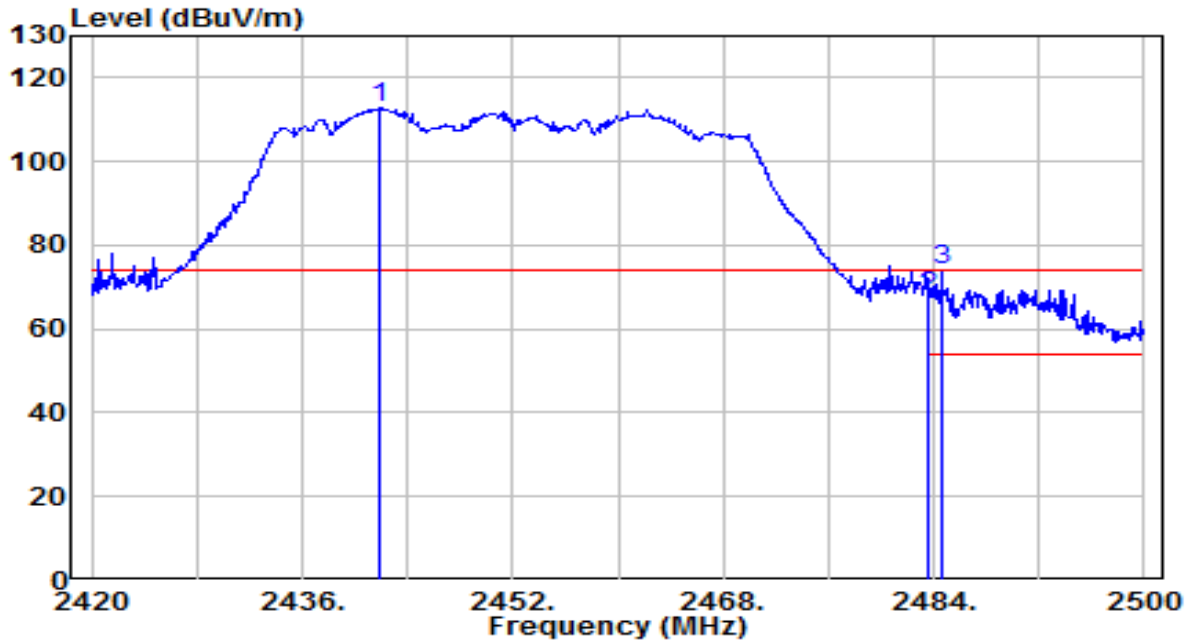


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2441.840	82.10	30.77	112.87	N/A	N/A	200	320	Peak
2	2483.500	36.78	30.91	67.69	-6.31	74.00	200	320	Peak
3	* 2484.640	42.92	30.92	73.83	-0.17	74.00	200	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

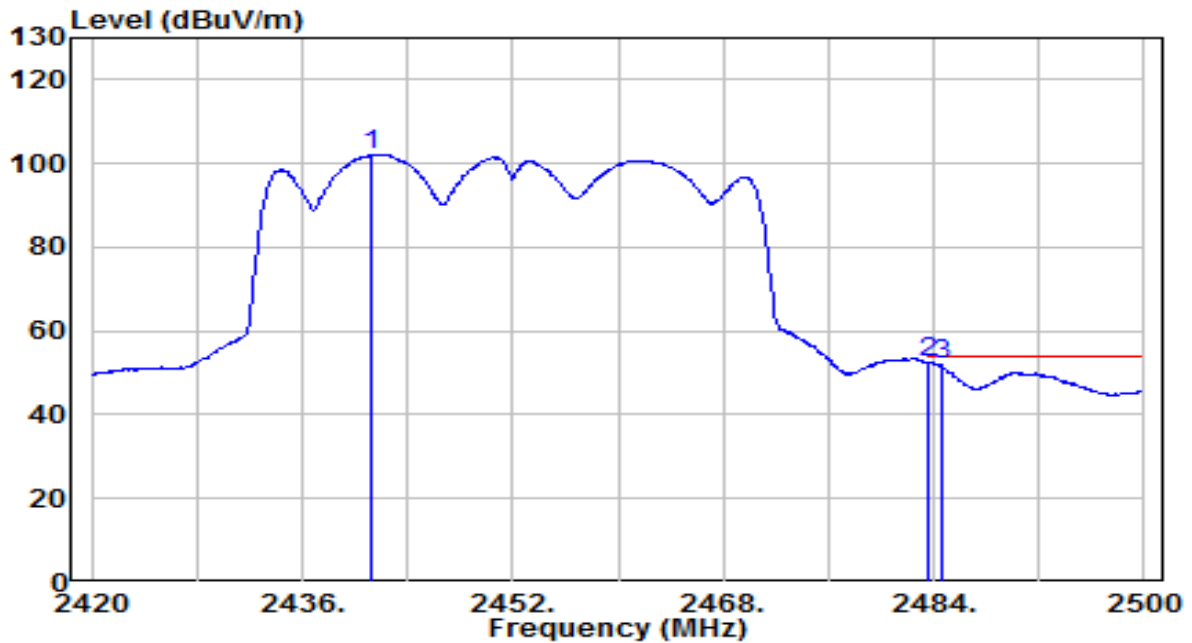


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2441.280	71.42	30.77	102.19	N/A	N/A	200	320	Average
2	* 2483.500	21.52	30.91	52.44	-1.56	54.00	200	320	Average
3	2484.560	20.85	30.92	51.77	-2.23	54.00	200	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

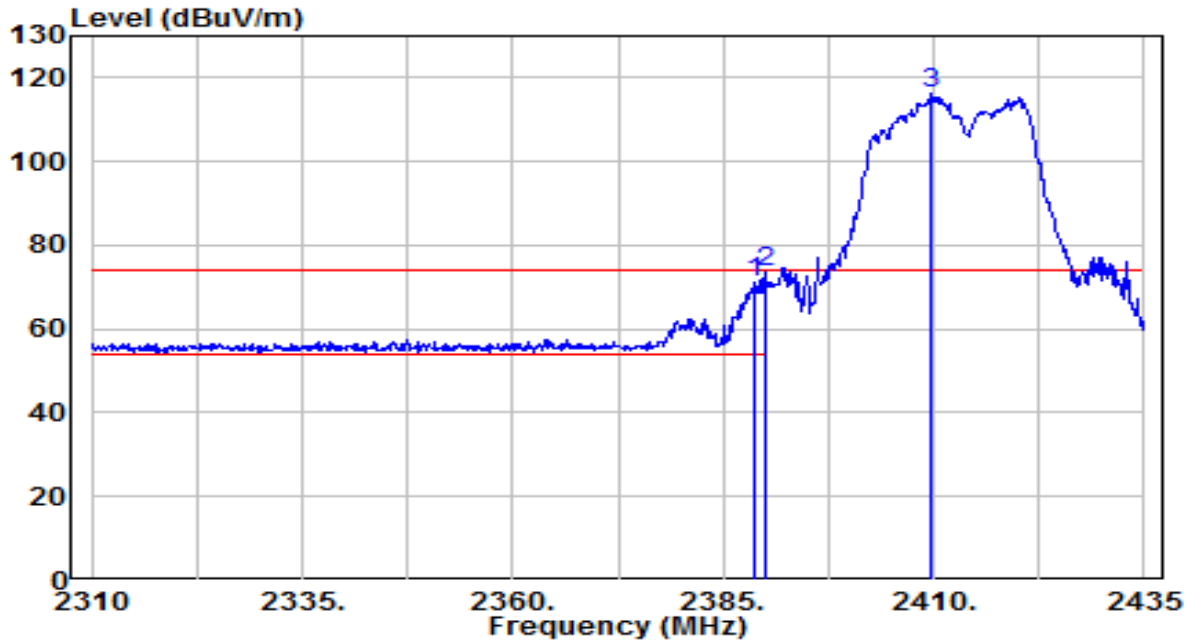


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	40.53	30.61	71.14	-2.86	74.00	320	180	Peak
2	* 2390.000	43.19	30.61	73.81	-0.19	74.00	320	180	Peak
3	2409.750	85.53	30.66	116.19	N/A	N/A	320	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

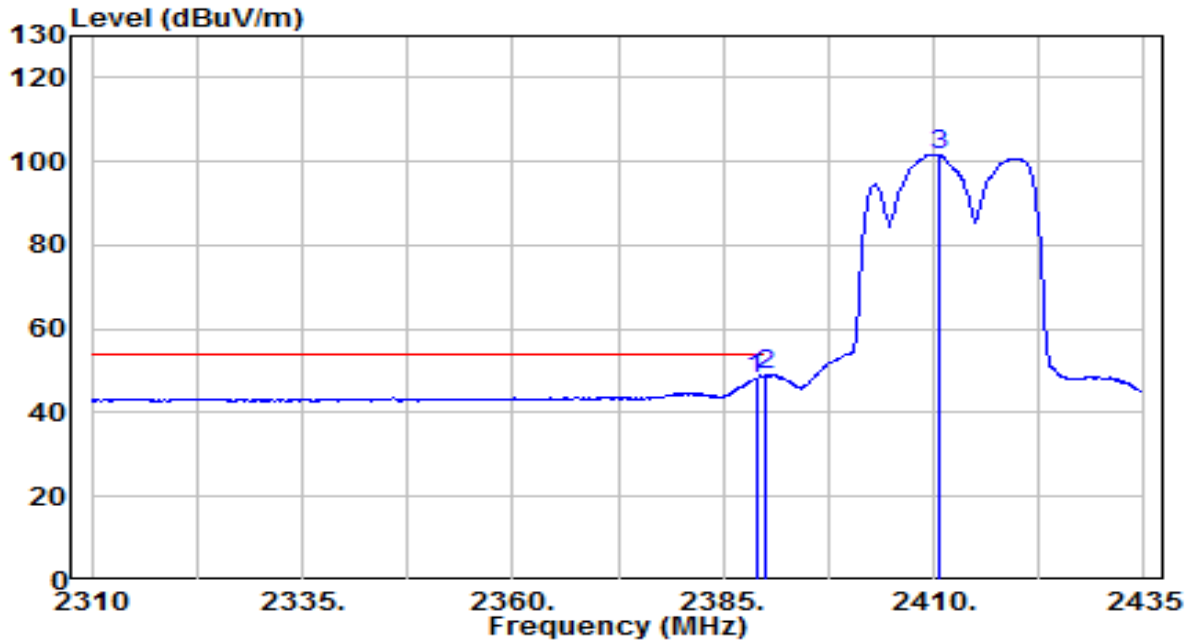


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	17.56	30.61	48.17	-5.83	54.00	320	180	Average
2	* 2390.000	18.53	30.61	49.14	-4.86	54.00	320	180	Average
3	2410.625	71.07	30.66	101.74	N/A	N/A	320	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

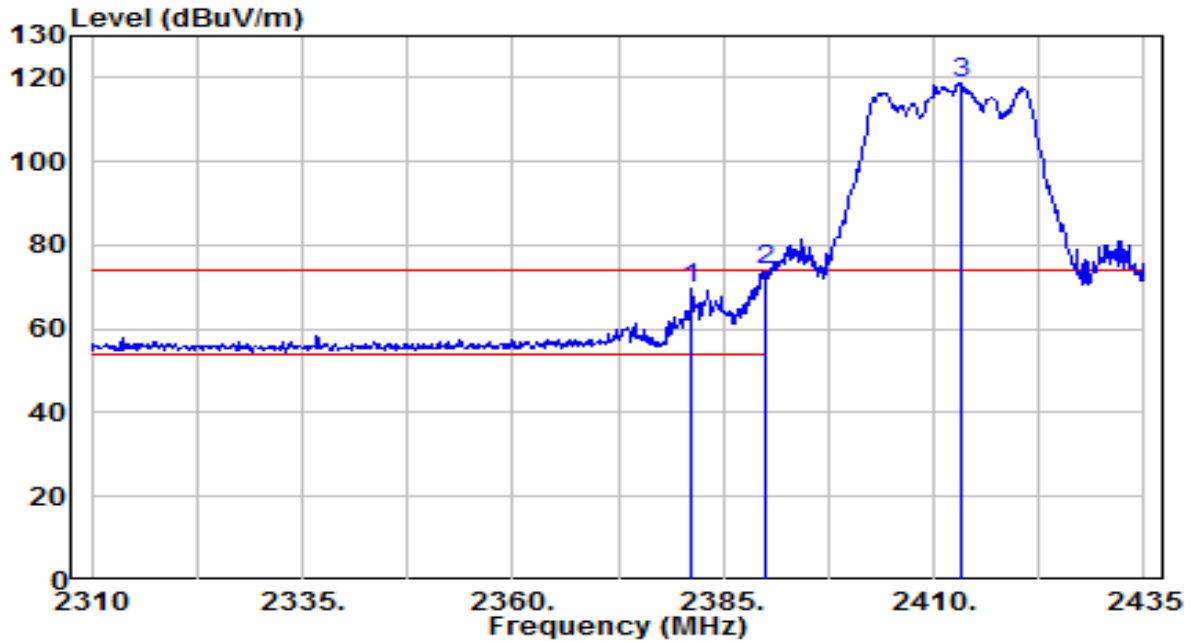


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2381.250	39.23	30.60	69.84	-4.16	74.00	185	325	Peak
2	* 2390.000	43.26	30.61	73.87	-0.13	74.00	185	325	Peak
3	2413.125	88.00	30.67	118.67	N/A	N/A	185	325	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

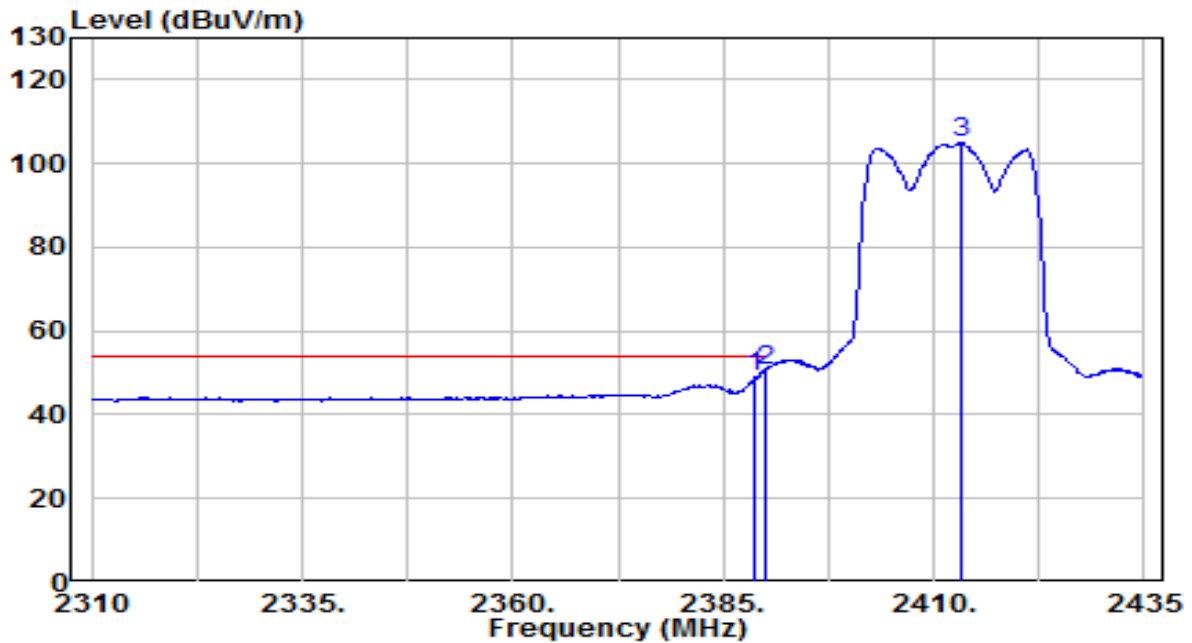


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	18.20	30.61	48.82	-5.18	54.00	185	325	Average
2	* 2390.000	20.09	30.61	50.70	-3.30	54.00	185	325	Average
3	2413.125	74.10	30.67	104.77	N/A	N/A	185	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

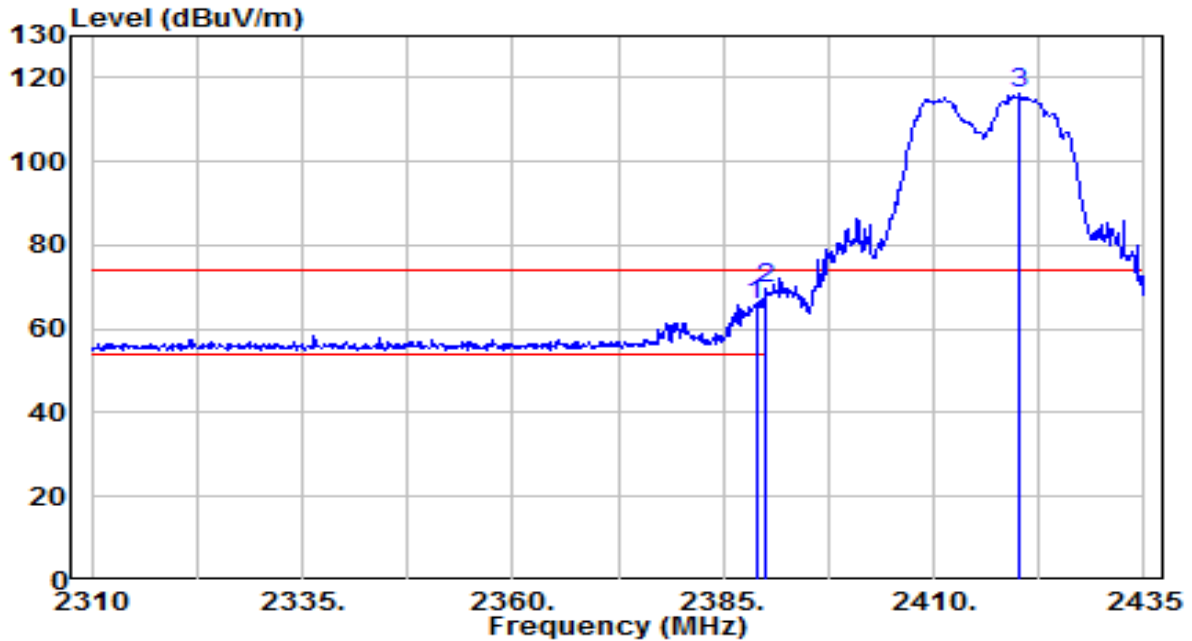


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	35.34	30.61	65.95	-8.05	74.00	400	185	Peak
2	* 2390.000	39.23	30.61	69.84	-4.16	74.00	400	185	Peak
3	2420.125	85.45	30.70	116.15	N/A	N/A	400	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

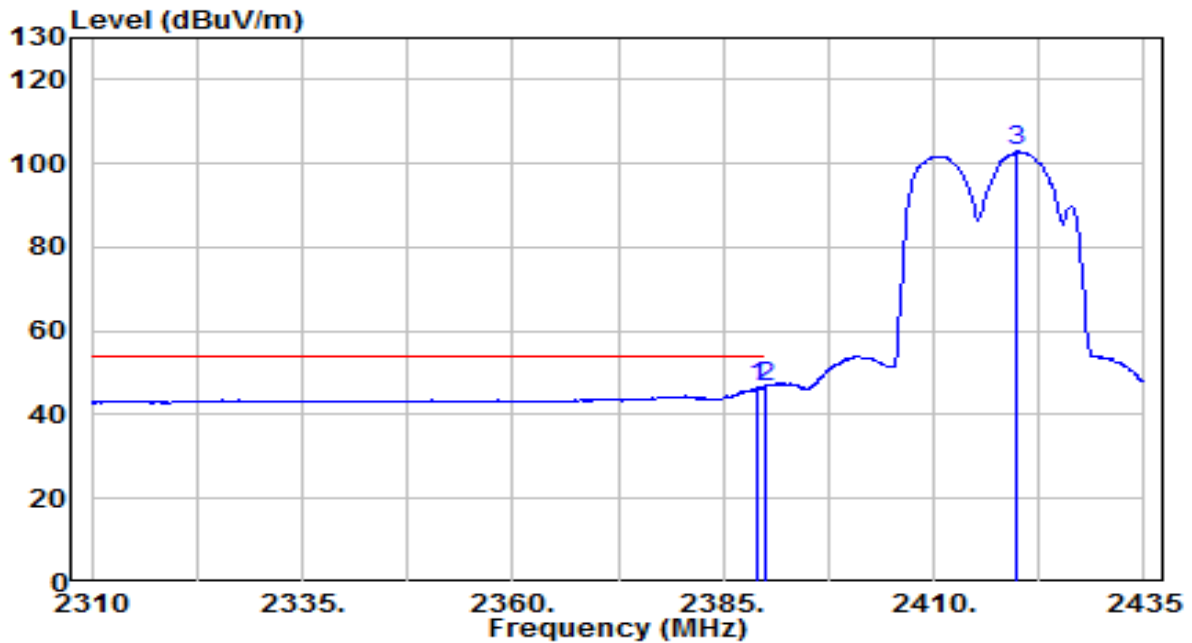


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	16.02	30.61	46.63	-7.37	54.00	400	185	Average
2	* 2390.000	16.20	30.61	46.82	-7.18	54.00	400	185	Average
3	2419.875	72.21	30.70	102.90	N/A	N/A	400	185	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

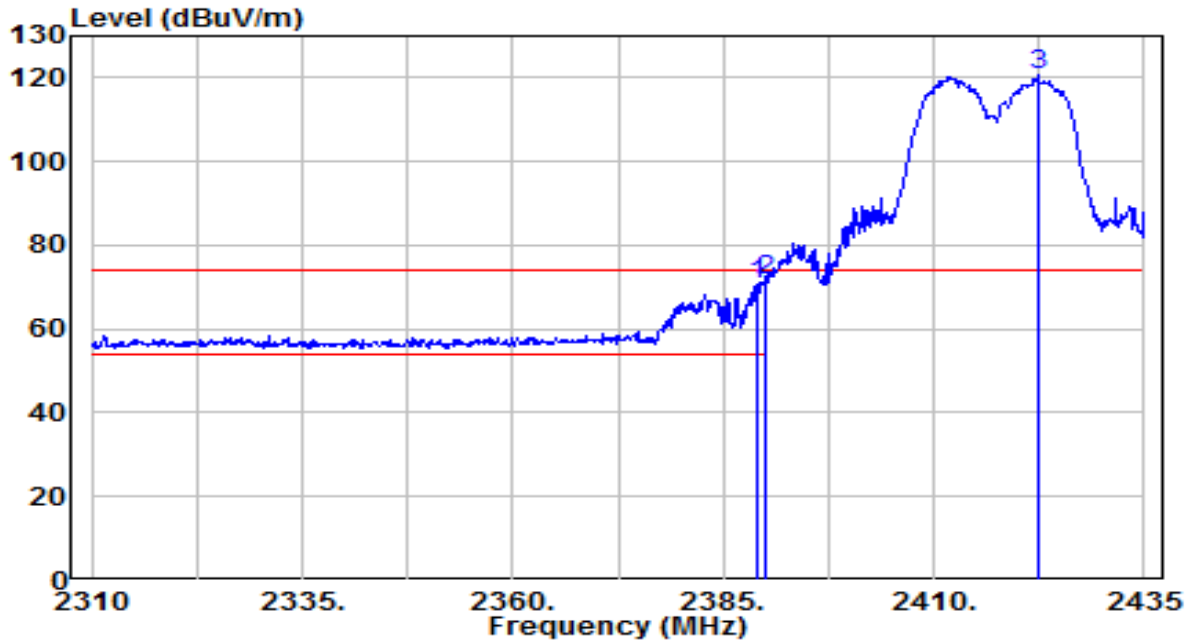


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	39.97	30.61	70.58	-3.42	74.00	195	325	Peak
2	* 2390.000	40.99	30.61	71.61	-2.39	74.00	195	325	Peak
3	2422.375	89.74	30.70	120.44	N/A	N/A	195	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

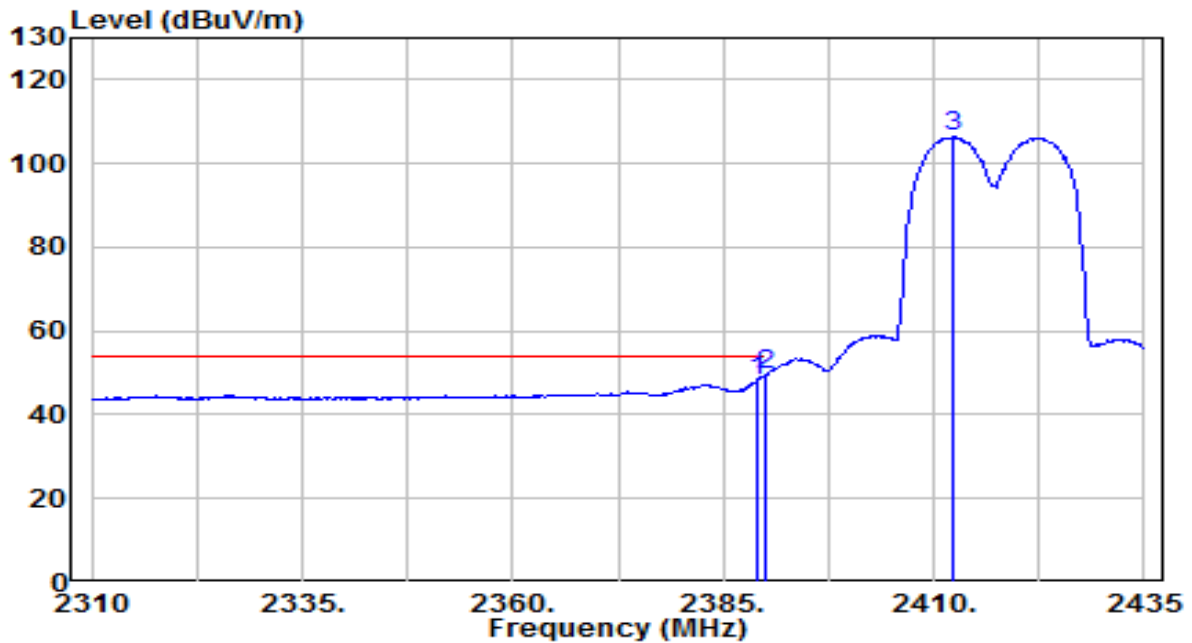


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	17.47	30.61	48.08	-5.92	54.00	195	325	Average
2	* 2390.000	18.88	30.61	49.49	-4.51	54.00	195	325	Average
3	2412.250	75.89	30.67	106.56	N/A	N/A	195	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

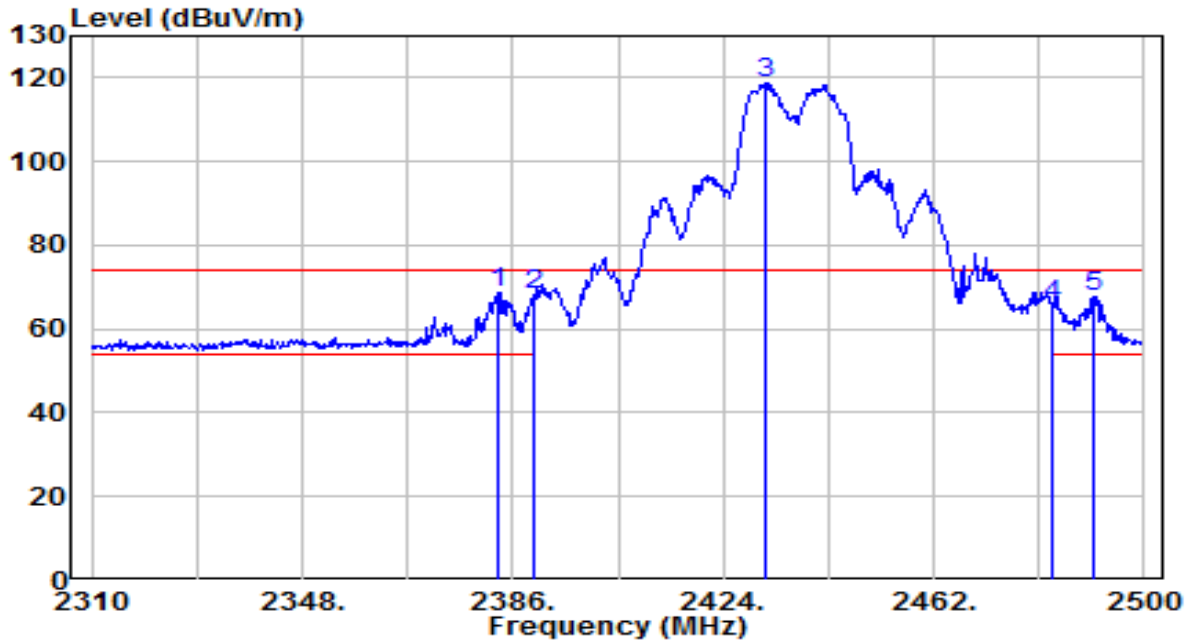


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2383.530	37.90	30.60	68.50	-5.50	74.00	180	325	Peak
2	2390.000	37.70	30.61	68.31	-5.69	74.00	180	325	Peak
3	2431.790	88.14	30.74	118.87	N/A	N/A	180	325	Peak
4	2483.500	34.70	30.91	65.61	-8.39	74.00	180	325	Peak
5	2490.690	36.91	30.94	67.85	-6.15	74.00	180	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

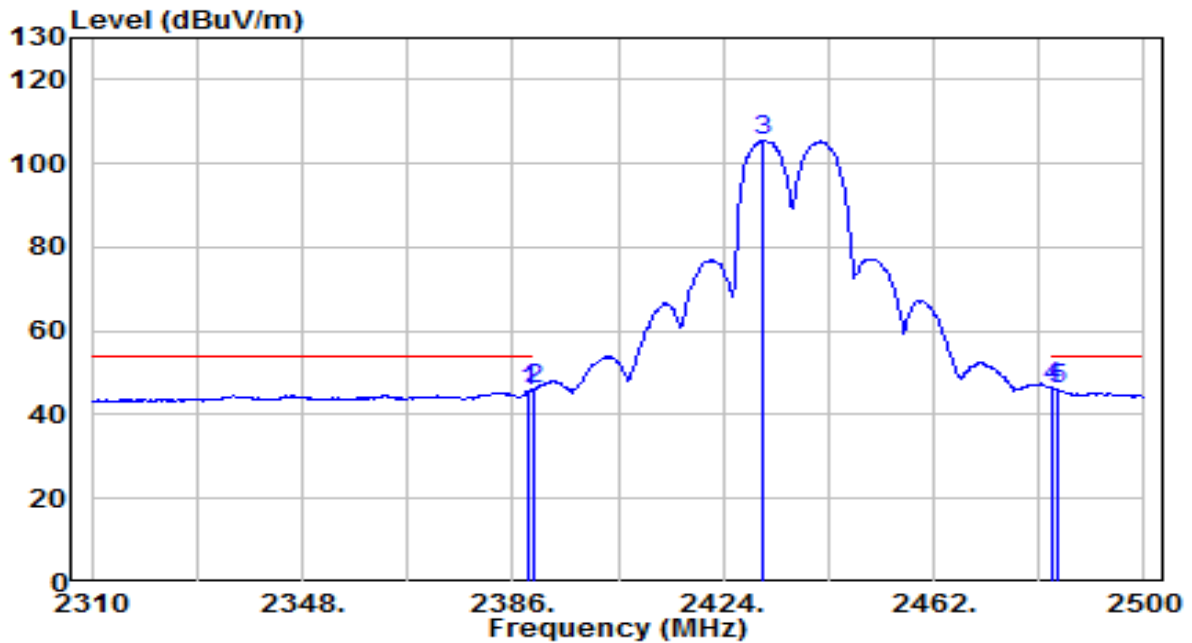


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	14.95	30.61	45.57	-8.43	54.00	180	325	Average
2	2390.000	15.60	30.61	46.21	-7.79	54.00	180	325	Average
3	2431.220	74.89	30.73	105.62	N/A	N/A	180	325	Average
4	* 2483.500	15.55	30.91	46.46	-7.54	54.00	180	325	Average
5	2484.420	15.10	30.92	46.02	-7.98	54.00	180	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

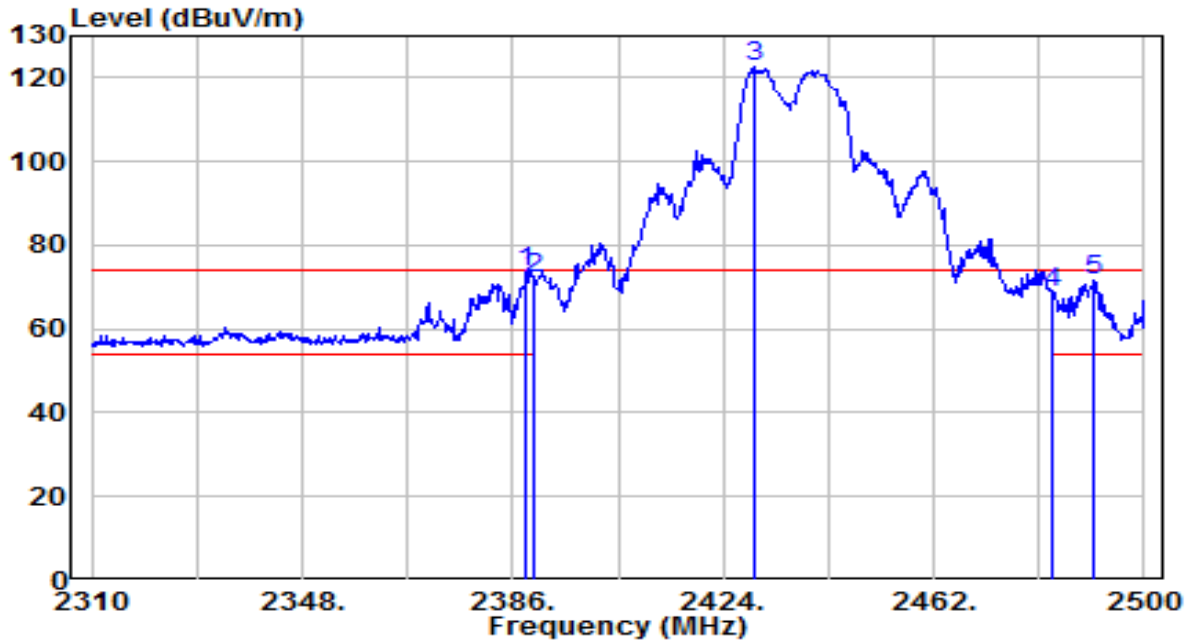


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.280	43.07	30.61	73.68	-0.32	74.00	140	185	Peak
2	2390.000	41.68	30.61	72.29	-1.71	74.00	140	185	Peak
3	2429.700	91.72	30.73	122.45	N/A	N/A	140	185	Peak
4	2483.500	37.89	30.91	68.81	-5.19	74.00	140	185	Peak
5	2490.880	40.70	30.94	71.64	-2.36	74.00	140	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

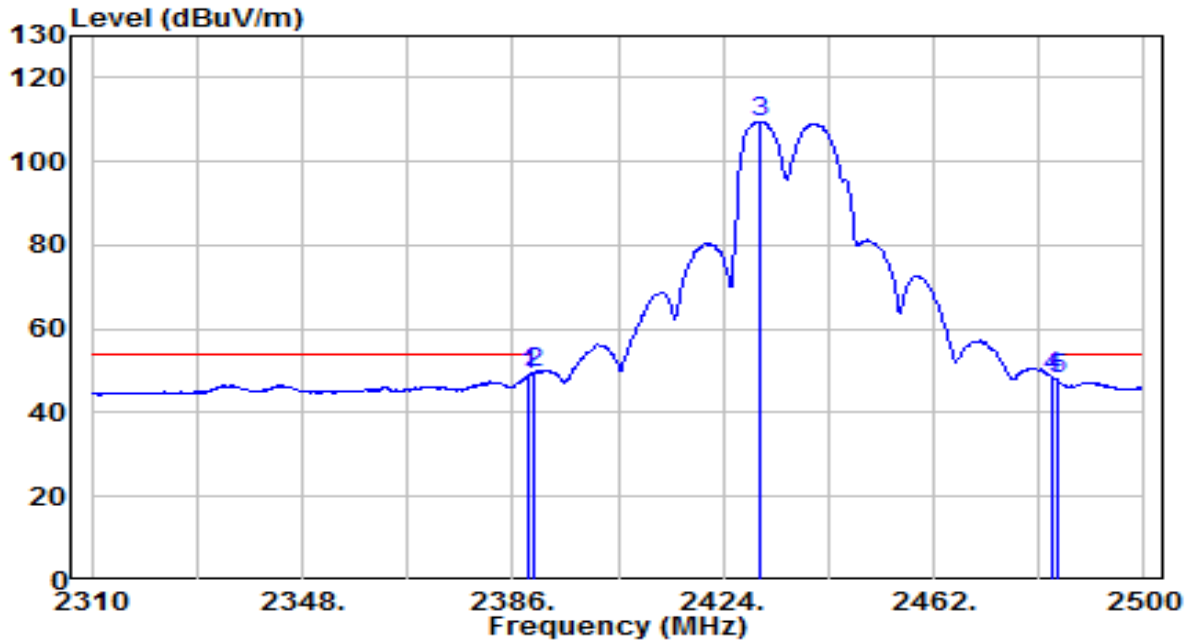


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	18.37	30.61	48.98	-5.02	54.00	140	185	Average
2	* 2390.000	18.79	30.61	49.40	-4.60	54.00	140	185	Average
3	2430.460	78.77	30.73	109.50	N/A	N/A	140	185	Average
4	2483.500	17.58	30.91	48.49	-5.51	54.00	140	185	Average
5	2484.230	17.13	30.92	48.05	-5.95	54.00	140	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

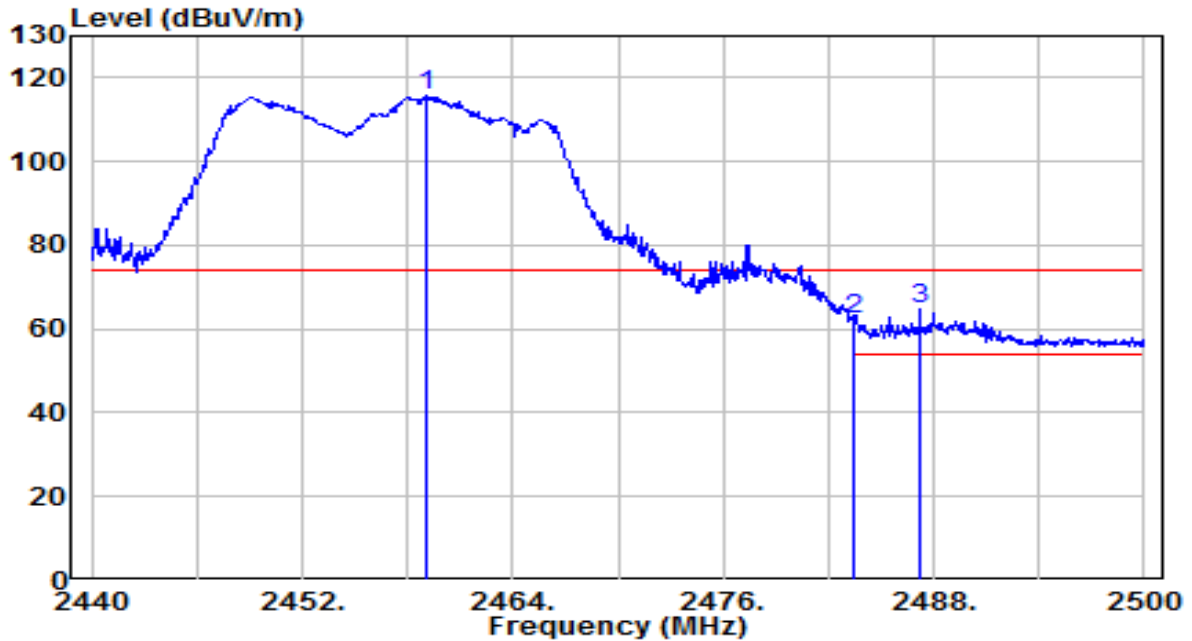


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.020	84.73	30.83	115.56	N/A	N/A	205	195	Peak
2	2483.500	31.63	30.91	62.54	-11.46	74.00	205	195	Peak
3	* 2487.220	33.62	30.93	64.54	-9.46	74.00	205	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

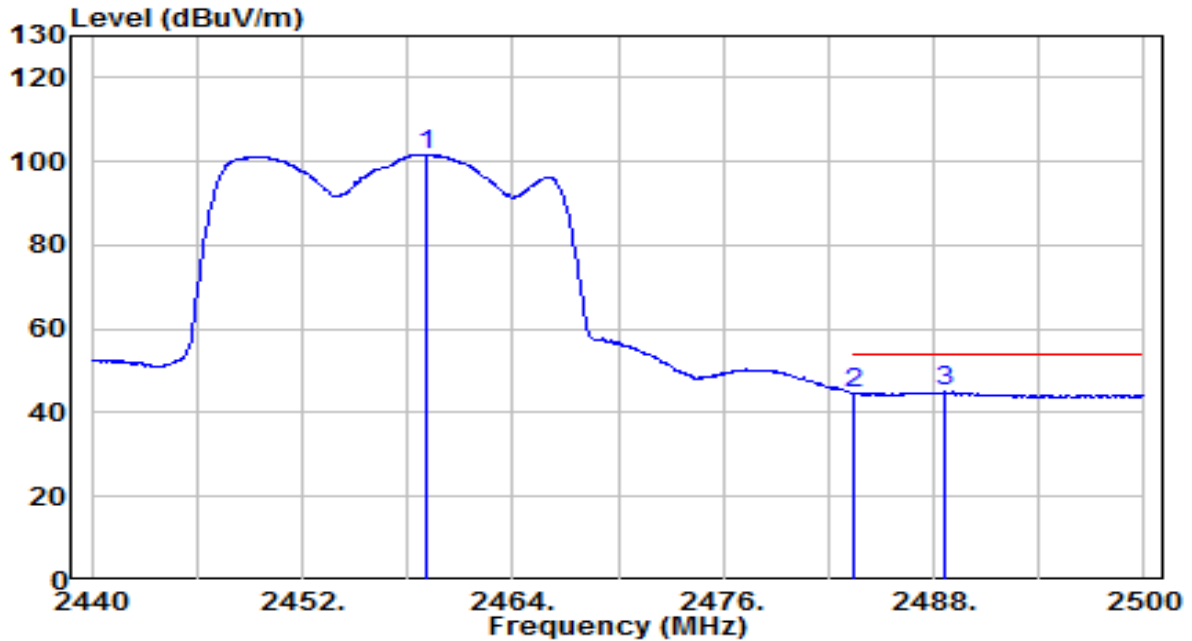


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.080	70.90	30.83	101.73	N/A	N/A	205	195	Average
2	2483.500	13.57	30.91	44.49	-9.51	54.00	205	195	Average
3	* 2488.660	14.00	30.93	44.93	-9.07	54.00	205	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

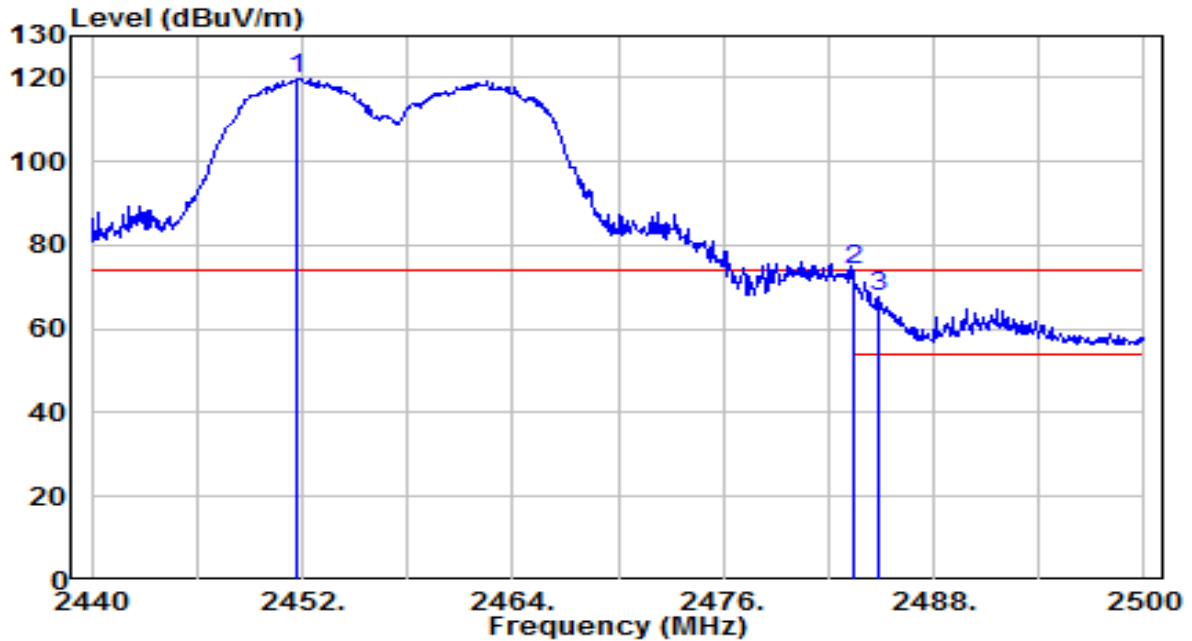


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.700	89.10	30.80	119.90	N/A	N/A	185	325	Peak
2	* 2483.500	42.92	30.91	73.83	-0.17	74.00	185	325	Peak
3	2484.820	36.63	30.92	67.55	-6.45	74.00	185	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

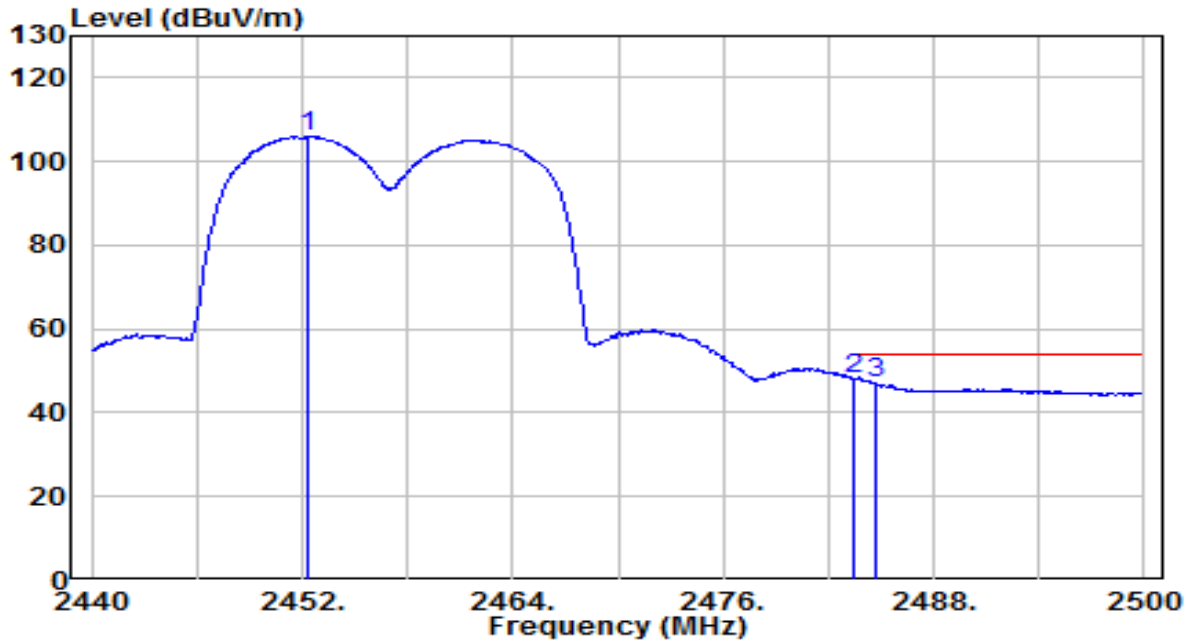


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2452.360	75.35	30.81	106.15	N/A	N/A	185	325	Average
2	* 2483.500	17.38	30.91	48.29	-5.71	54.00	185	325	Average
3	2484.640	16.26	30.92	47.18	-6.82	54.00	185	325	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

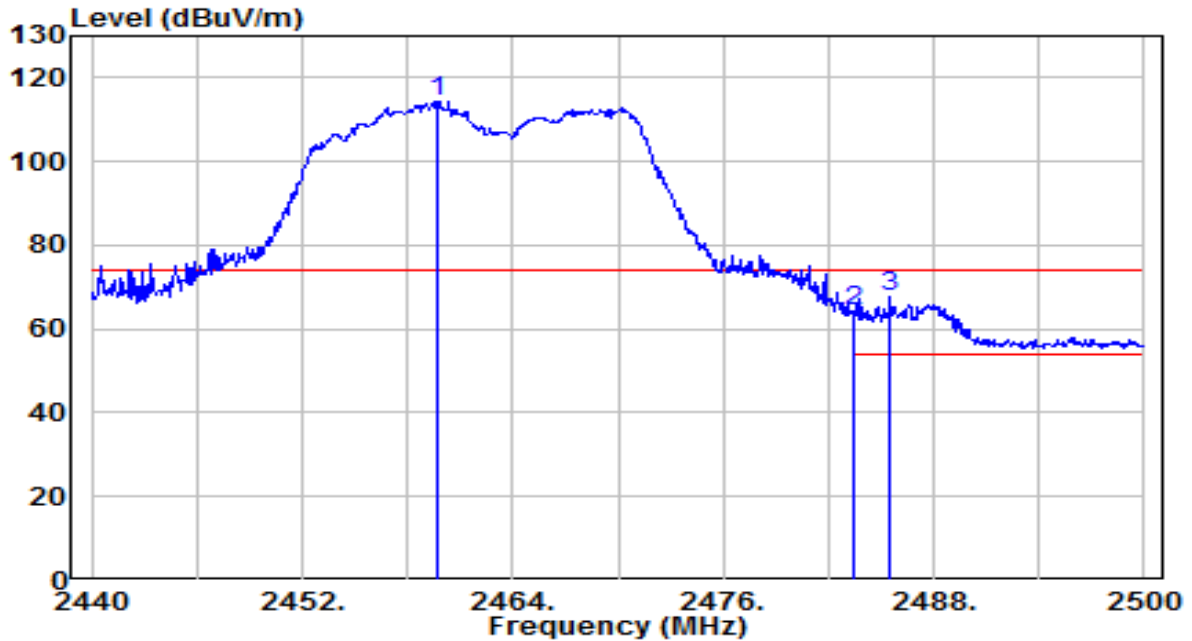


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.680	83.47	30.83	114.31	N/A	N/A	205	195	Peak
2	2483.500	33.45	30.91	64.37	-9.63	74.00	205	195	Peak
3	* 2485.540	36.96	30.92	67.88	-6.12	74.00	205	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

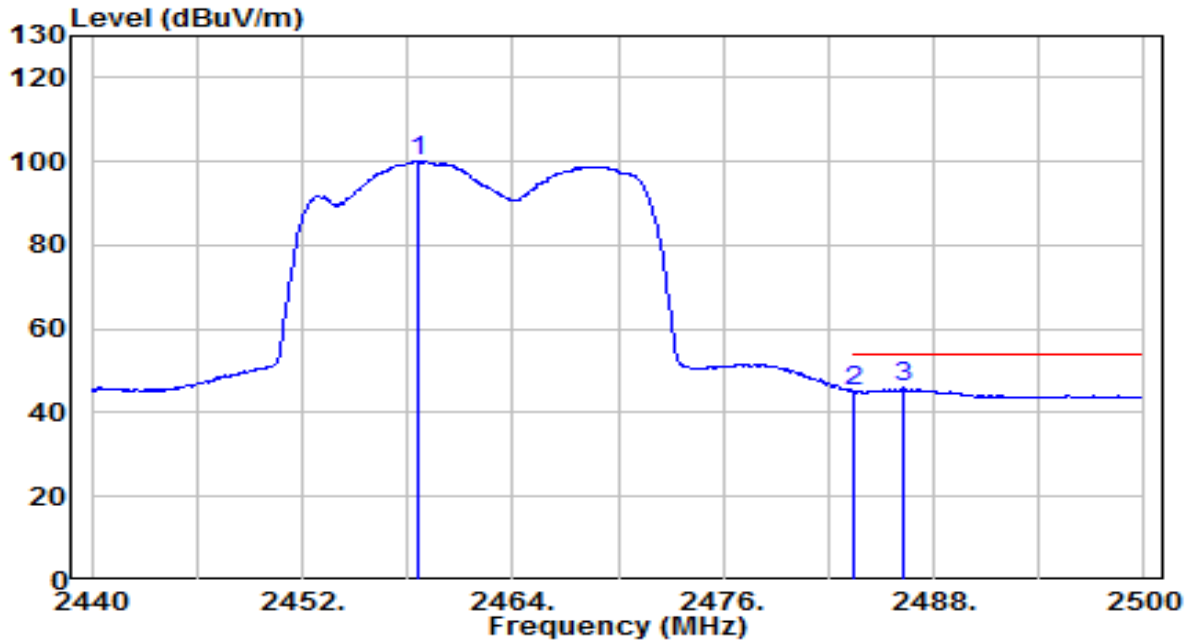


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.660	69.29	30.83	100.12	N/A	N/A	205	195	Average
2	2483.500	14.36	30.91	45.28	-8.72	54.00	205	195	Average
3	* 2486.200	15.05	30.92	45.97	-8.03	54.00	205	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

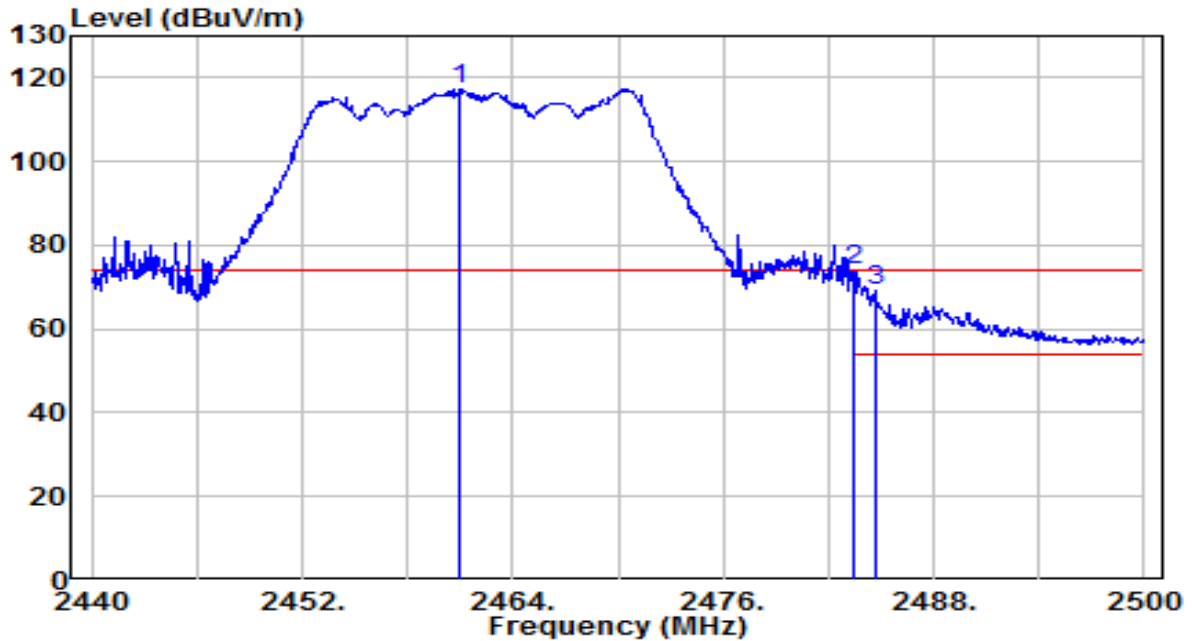


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.000	86.58	30.84	117.42	N/A	N/A	220	320	Peak
2	* 2483.500	42.97	30.91	73.89	-0.11	74.00	220	320	Peak
3	2484.700	38.22	30.92	69.14	-4.86	74.00	220	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

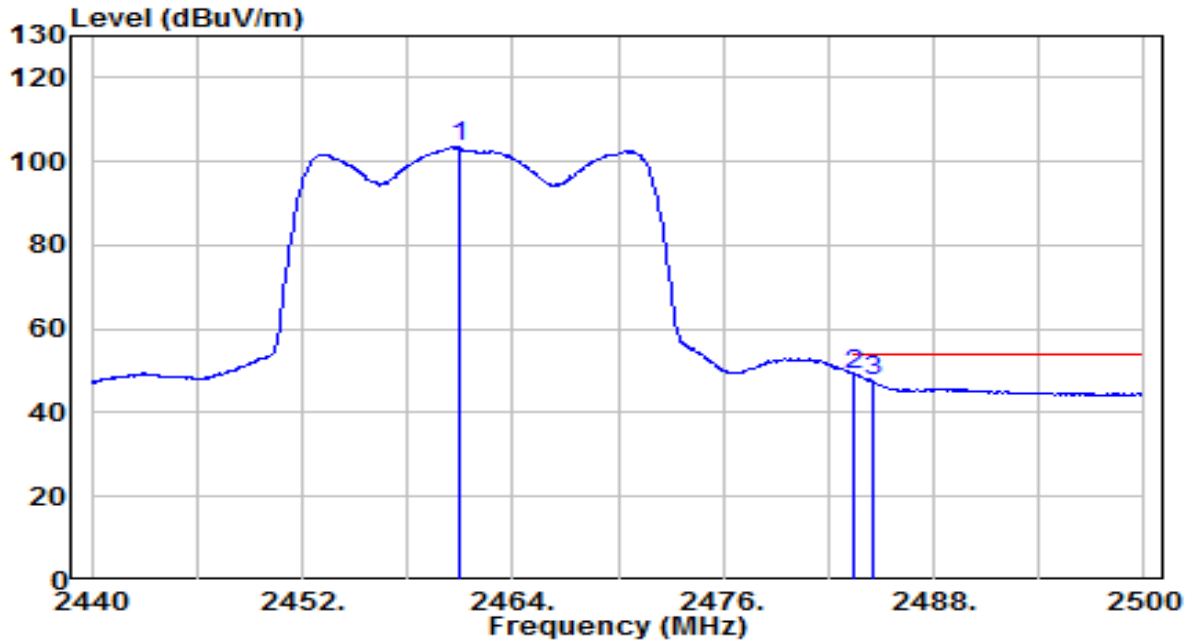


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	72.61	30.84	103.45	N/A	N/A	220	320	Average
2	* 2483.500	18.05	30.91	48.96	-5.04	54.00	220	320	Average
3	2484.580	16.48	30.92	47.39	-6.61	54.00	220	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

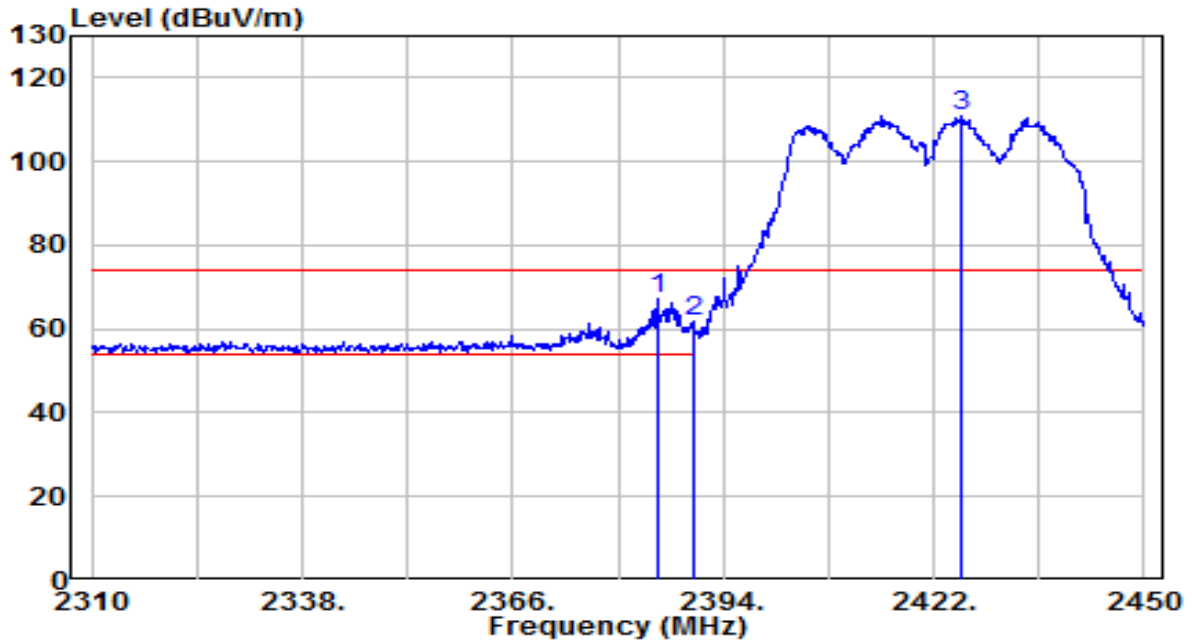


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2385.320	36.72	30.61	67.33	-6.67	74.00	315	180	Peak
2	2390.000	31.26	30.61	61.87	-12.13	74.00	315	180	Peak
3	2425.500	80.03	30.72	110.75	N/A	N/A	315	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

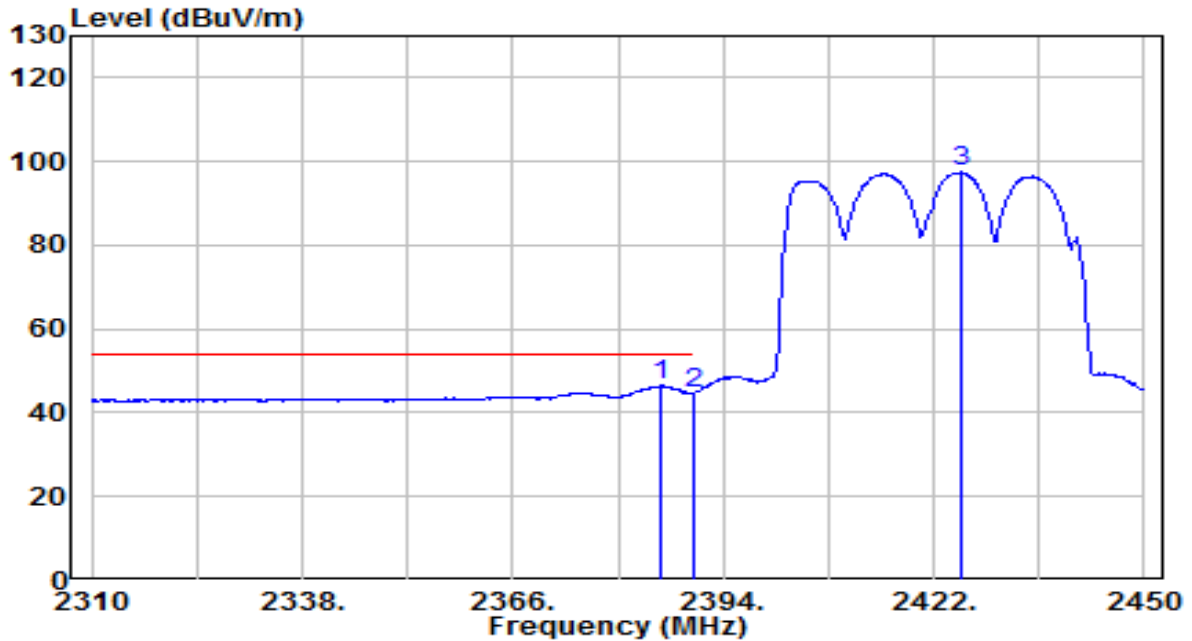


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.600	15.90	30.61	46.51	-7.49	54.00	315	180	Average
2		2390.000	13.84	30.61	44.46	-9.54	54.00	315	180	Average
3		2425.640	66.76	30.72	97.47	N/A	N/A	315	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

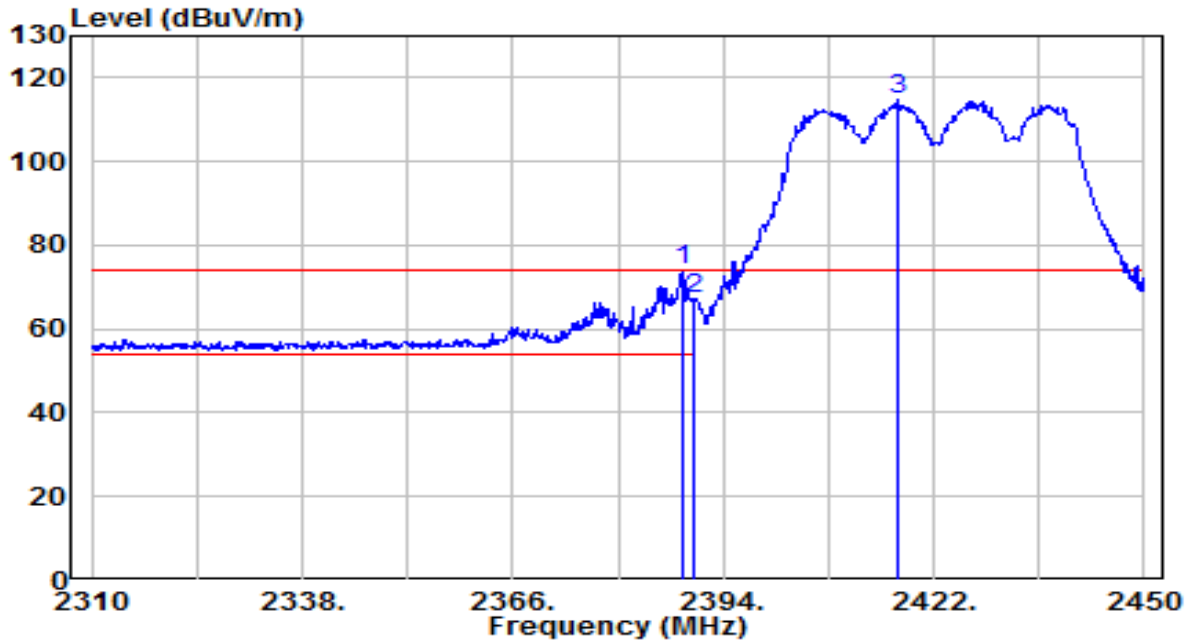


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.540	43.29	30.61	73.90	-0.10	74.00	185	325	Peak
2		2390.000	36.40	30.61	67.01	-6.99	74.00	185	325	Peak
3		2417.380	83.88	30.69	114.57	N/A	N/A	185	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

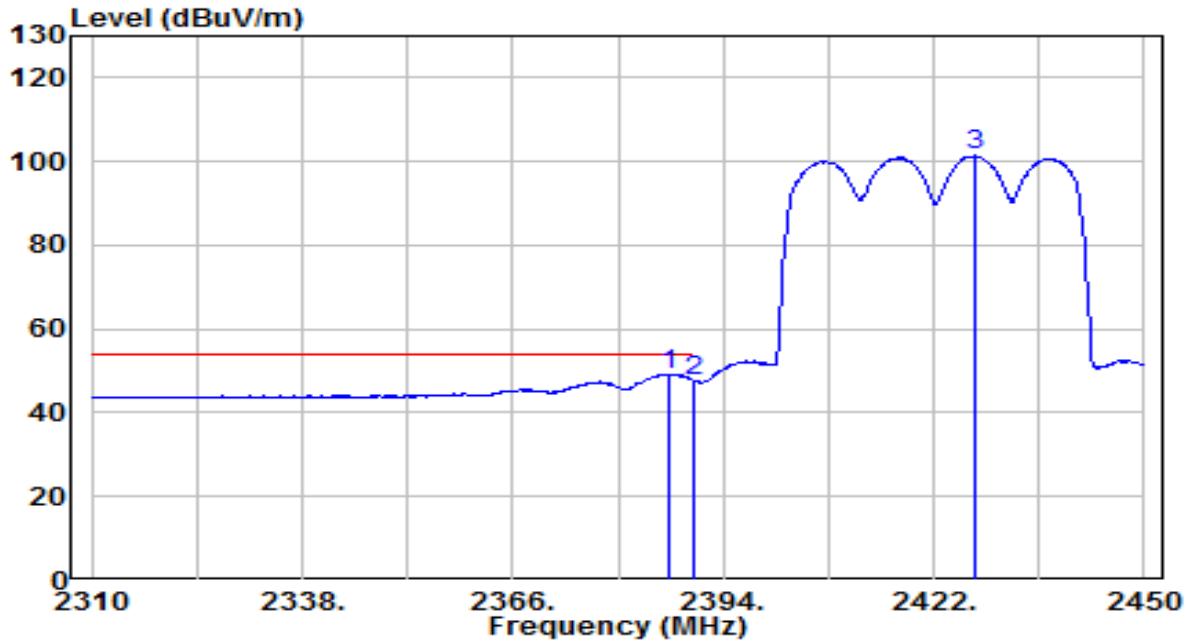


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.860	18.63	30.61	49.24	-4.76	54.00	185	325	Average
2		2390.000	17.19	30.61	47.81	-6.19	54.00	185	325	Average
3		2427.460	70.67	30.72	101.39	N/A	N/A	185	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

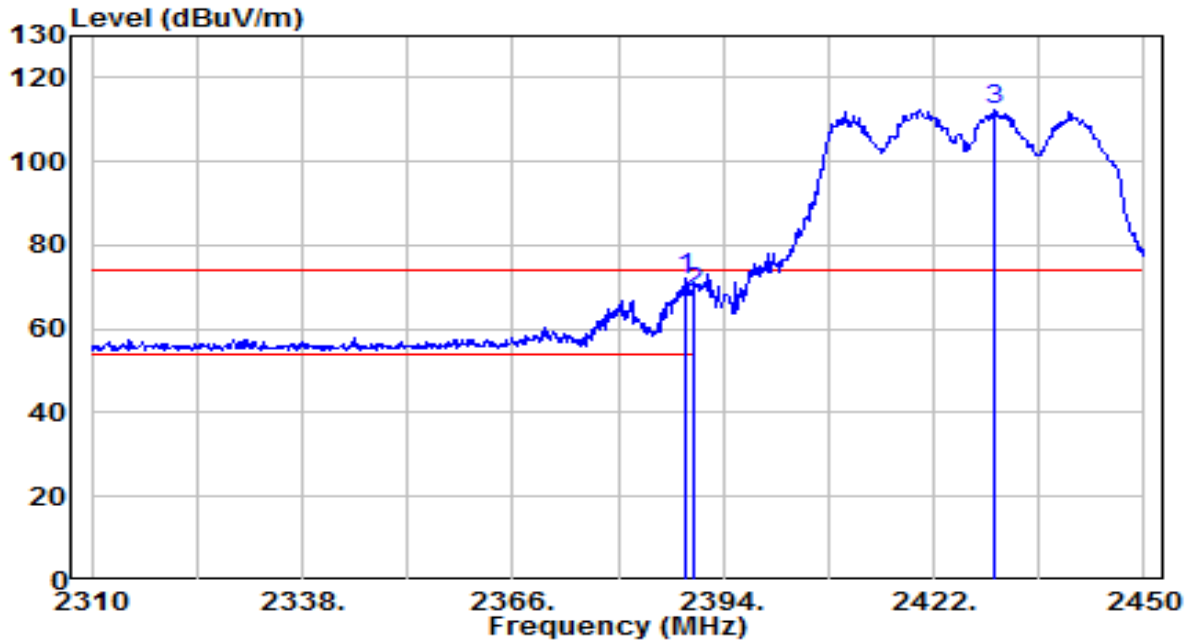


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.820	41.36	30.61	71.97	-2.03	74.00	315	180	Peak
2		2390.000	38.01	30.61	68.62	-5.38	74.00	315	180	Peak
3		2429.980	81.53	30.73	112.27	N/A	N/A	315	180	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

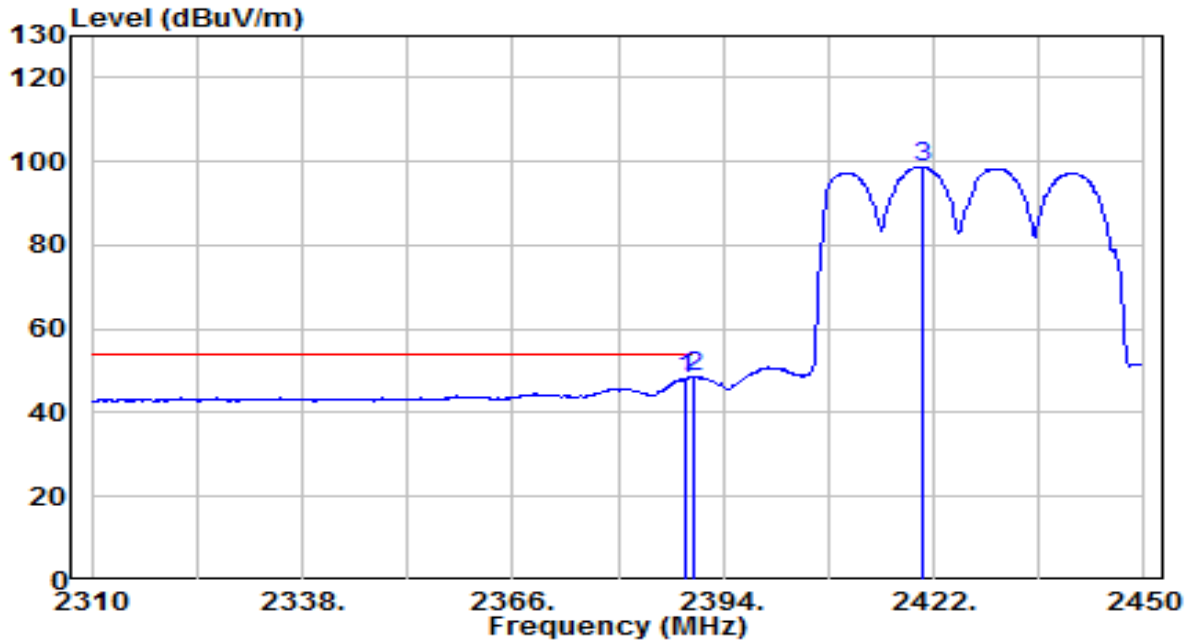


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.820	17.35	30.61	47.96	-6.04	54.00	315	180	Average
2	* 2390.000	18.10	30.61	48.72	-5.28	54.00	315	180	Average
3	2420.460	67.99	30.70	98.69	N/A	N/A	315	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

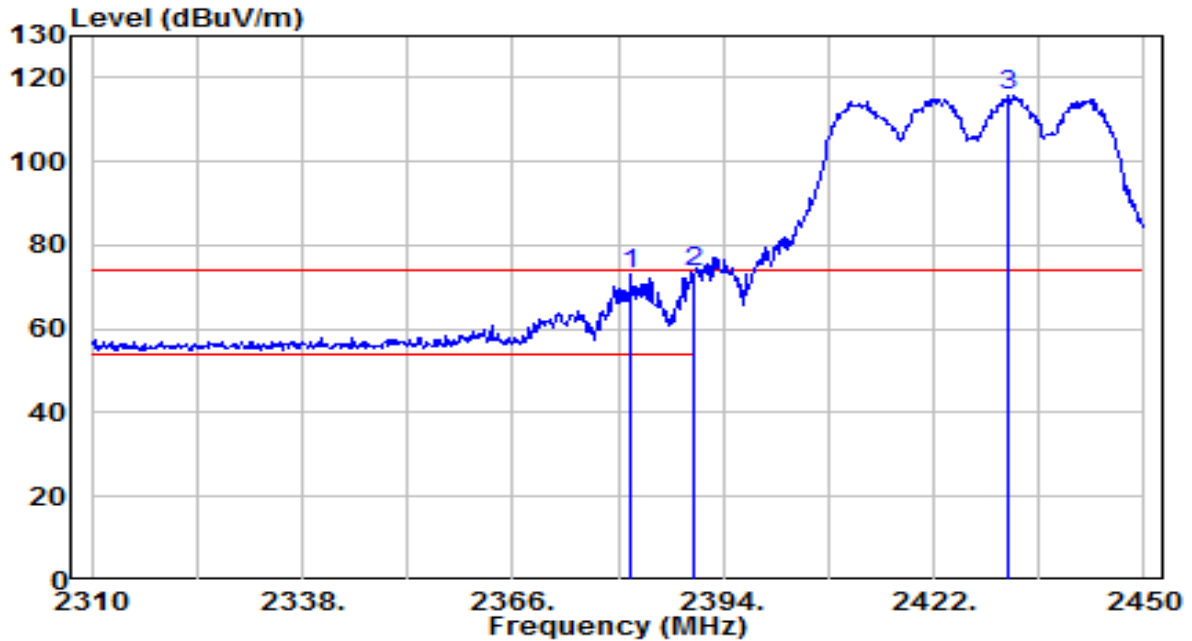


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2381.820	42.28	30.60	72.89	-1.11	74.00	200	325	Peak
2	* 2390.000	43.22	30.61	73.83	-0.17	74.00	200	325	Peak
3	2431.800	85.08	30.74	115.82	N/A	N/A	200	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

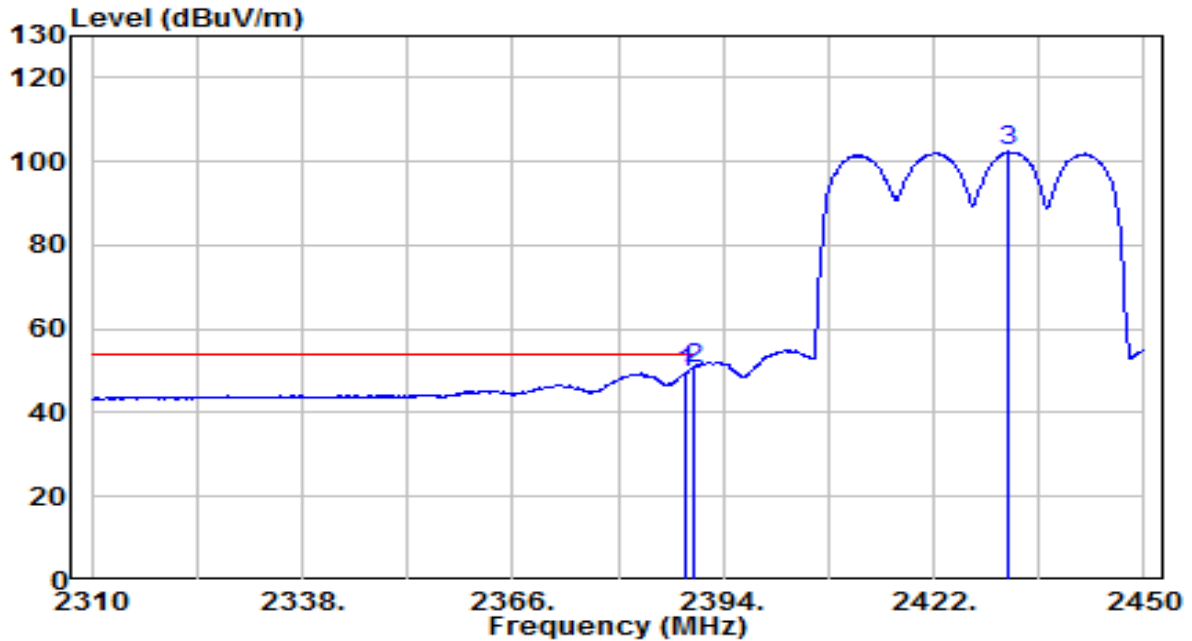


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	18.85	30.61	49.46	-4.54	54.00	200	325	Average
2	* 2390.000	20.16	30.61	50.77	-3.23	54.00	200	325	Average
3	2431.940	71.57	30.74	102.31	N/A	N/A	200	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

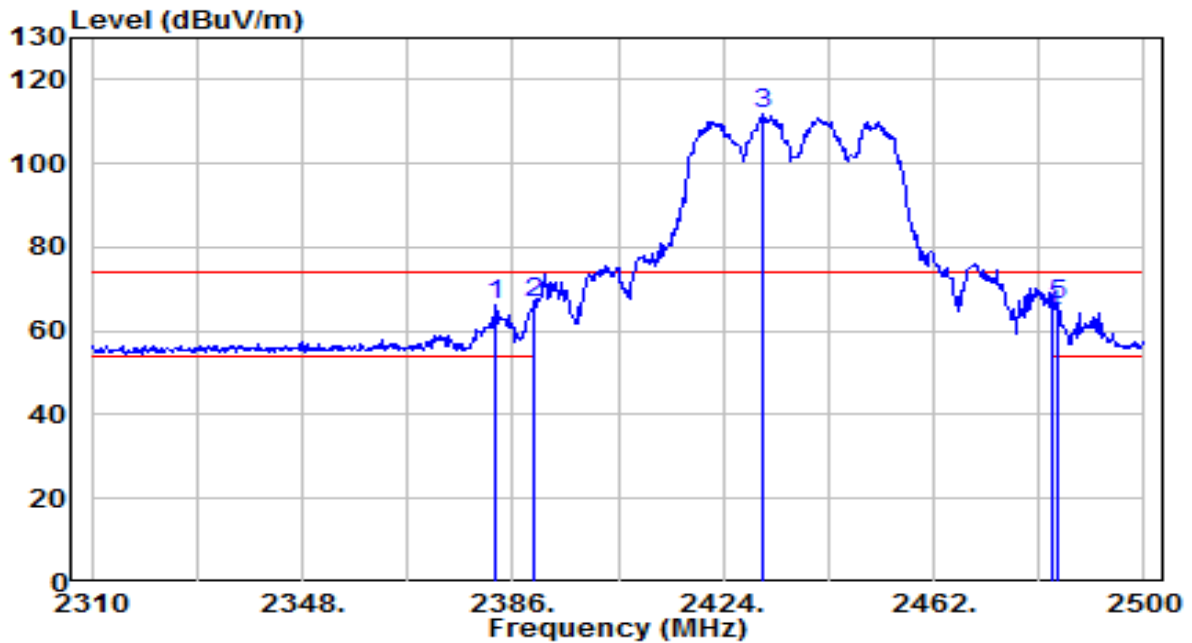


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.960	35.48	30.60	66.08	-7.92	74.00	185	325	Peak
2	* 2390.000	36.11	30.61	66.73	-7.27	74.00	185	325	Peak
3	2431.220	81.07	30.73	111.80	N/A	N/A	185	325	Peak
4	2483.500	32.99	30.91	63.90	-10.10	74.00	185	325	Peak
5	2484.230	35.21	30.92	66.12	-7.88	74.00	185	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

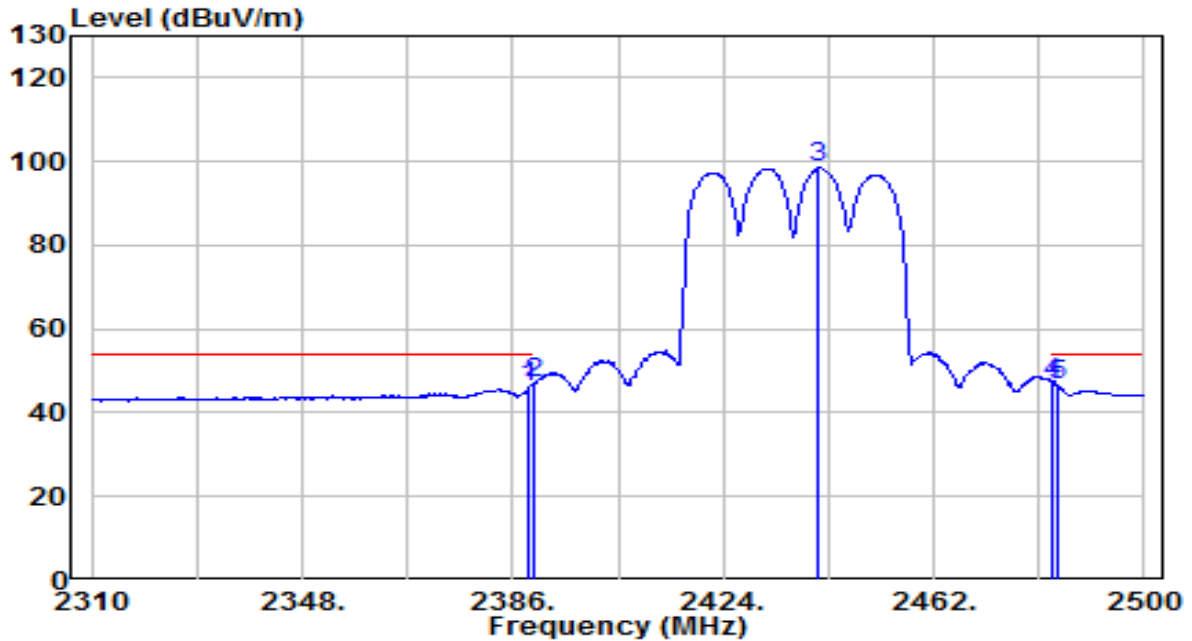


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	15.49	30.61	46.10	-7.90	54.00	185	325	Average
2	2390.000	16.49	30.61	47.10	-6.90	54.00	185	325	Average
3	2441.290	67.71	30.77	98.48	N/A	N/A	185	325	Average
4	* 2483.500	16.32	30.91	47.23	-6.77	54.00	185	325	Average
5	2484.230	15.89	30.92	46.81	-7.19	54.00	185	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

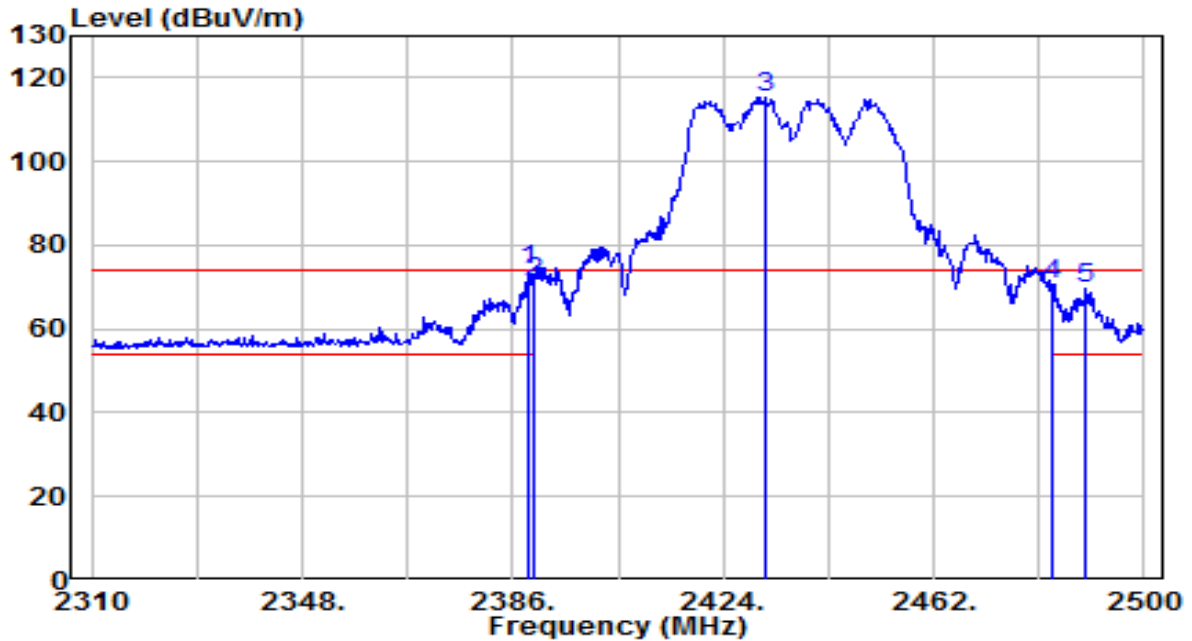


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.040	43.25	30.61	73.86	-0.14	74.00	135	180	Peak
2	2390.000	40.62	30.61	71.24	-2.76	74.00	135	180	Peak
3	2431.410	84.58	30.74	115.31	N/A	N/A	135	180	Peak
4	2483.500	39.57	30.91	70.48	-3.52	74.00	135	180	Peak
5	2489.360	38.56	30.93	69.50	-4.50	74.00	135	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

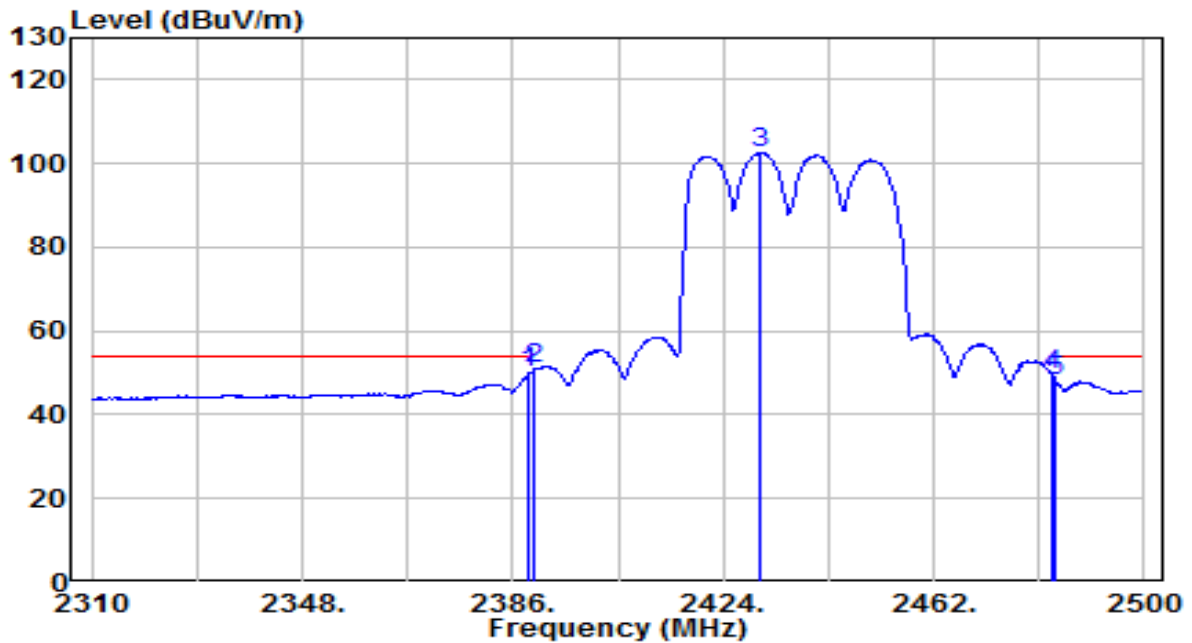


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	19.24	30.61	49.86	-4.14	54.00	135	180	Average
2	* 2390.000	20.19	30.61	50.80	-3.20	54.00	135	180	Average
3	2430.460	71.75	30.73	102.48	N/A	N/A	135	180	Average
4	2483.500	18.50	30.91	49.42	-4.58	54.00	135	180	Average
5	2484.040	17.40	30.92	48.32	-5.68	54.00	135	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

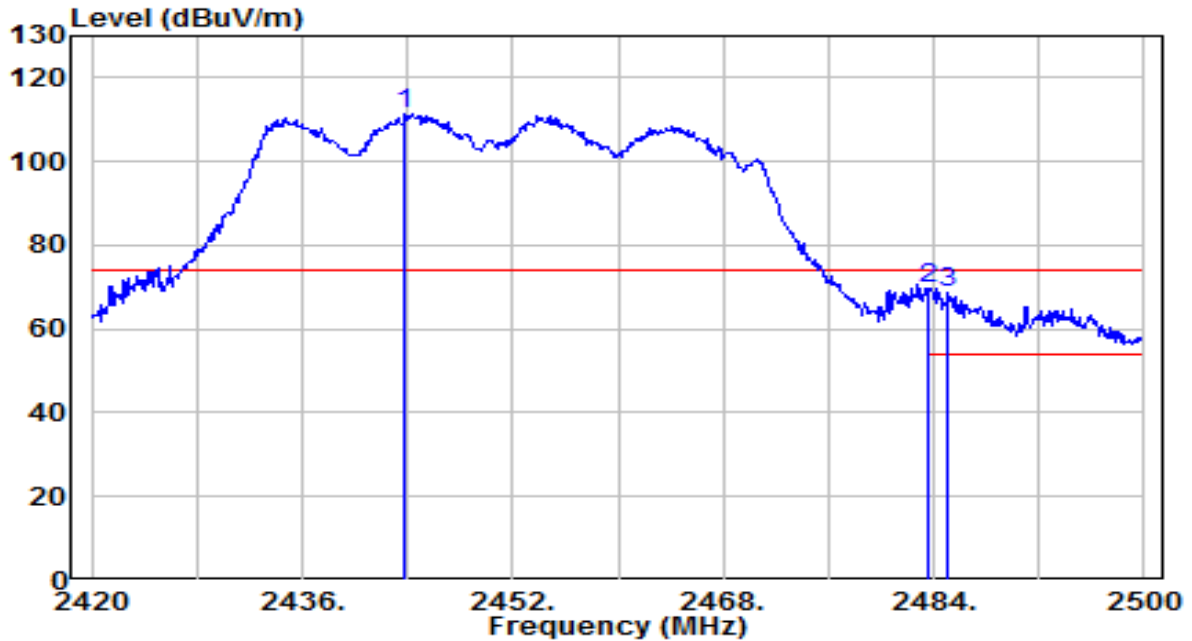


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.840	80.63	30.78	111.41	N/A	N/A	210	190	Peak
2	* 2483.500	38.56	30.91	69.48	-4.52	74.00	210	190	Peak
3	2485.120	37.93	30.92	68.85	-5.15	74.00	210	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

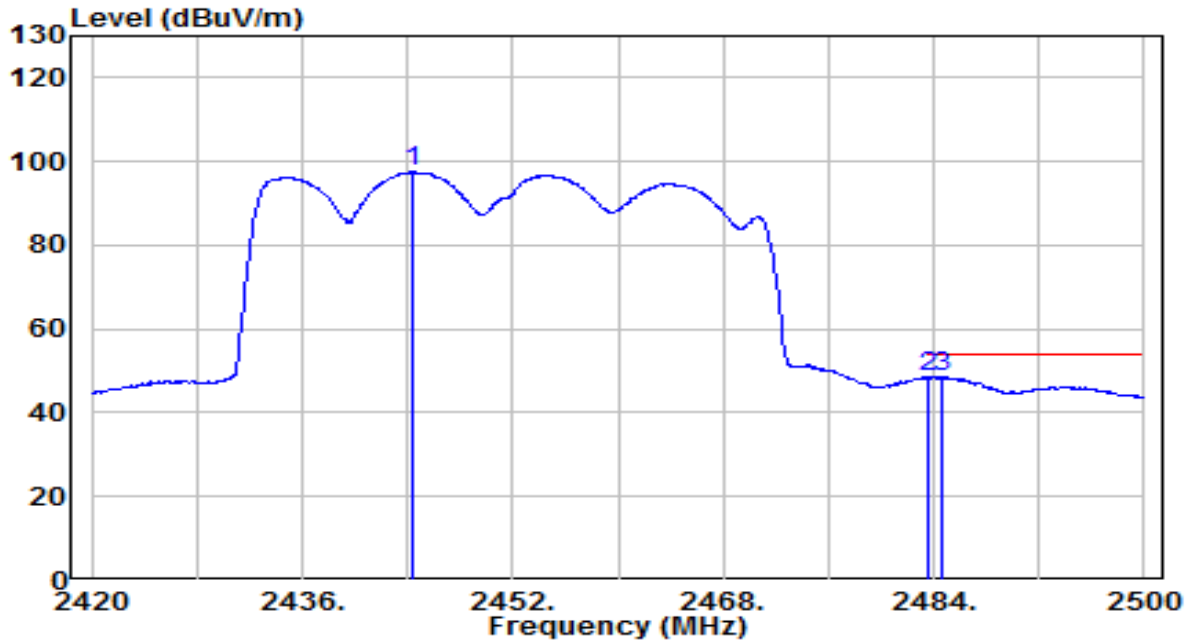


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2444.400	66.76	30.78	97.54	N/A	N/A	210	190	Average
2	2483.500	17.42	30.91	48.34	-5.66	54.00	210	190	Average
3	* 2484.720	17.55	30.92	48.47	-5.53	54.00	210	190	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

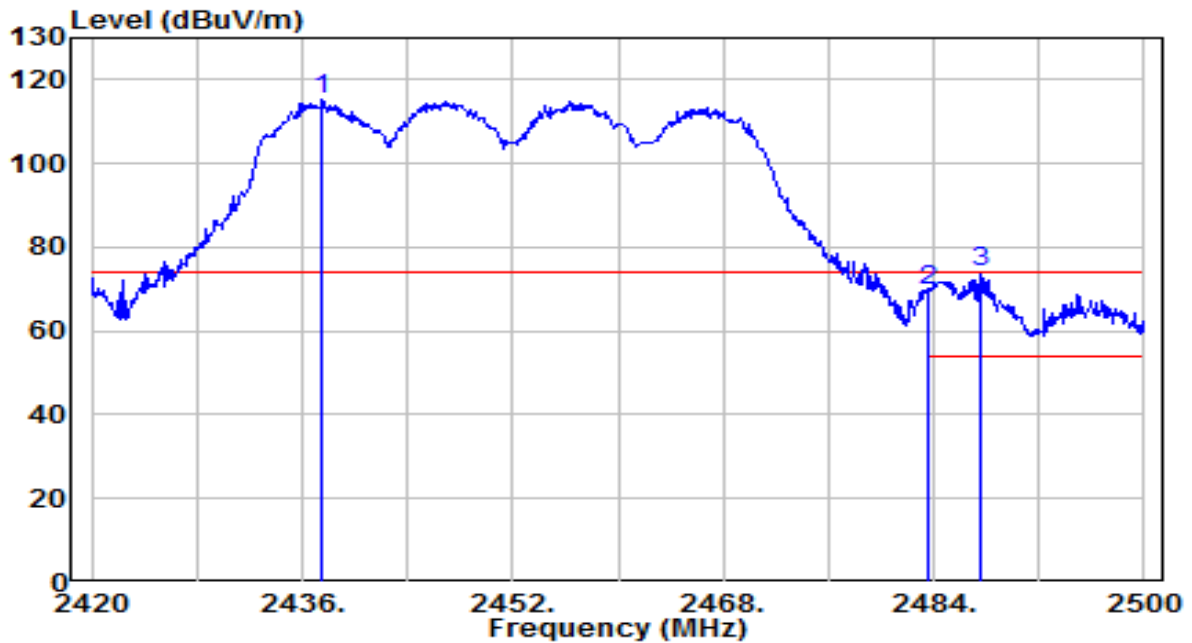


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2437.520	84.70	30.76	115.45	N/A	N/A	200	325	Peak
2	2483.500	38.51	30.91	69.42	-4.58	74.00	200	325	Peak
3	* 2487.520	42.94	30.93	73.87	-0.13	74.00	200	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1 (Vertical Ant)	Test Voltage	AC 120V/60Hz

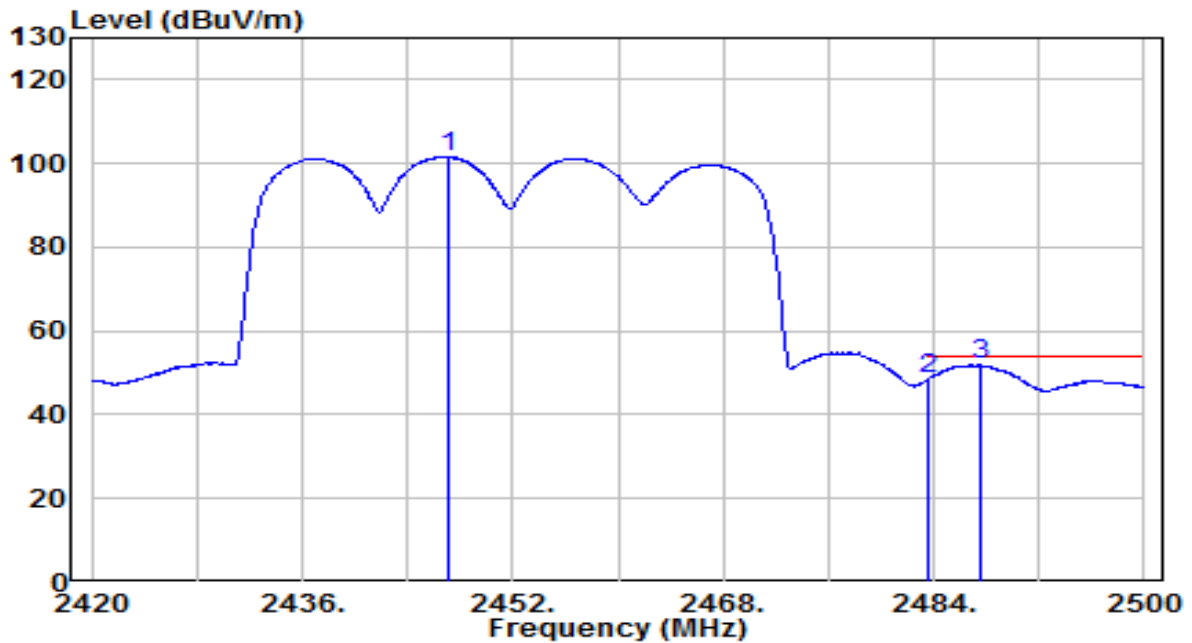

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.040	70.80	30.79	101.59	N/A	N/A	200	325	Average
2	2483.500	17.47	30.91	48.38	-5.62	54.00	200	325	Average
3	* 2487.520	21.13	30.93	52.06	-1.94	54.00	200	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

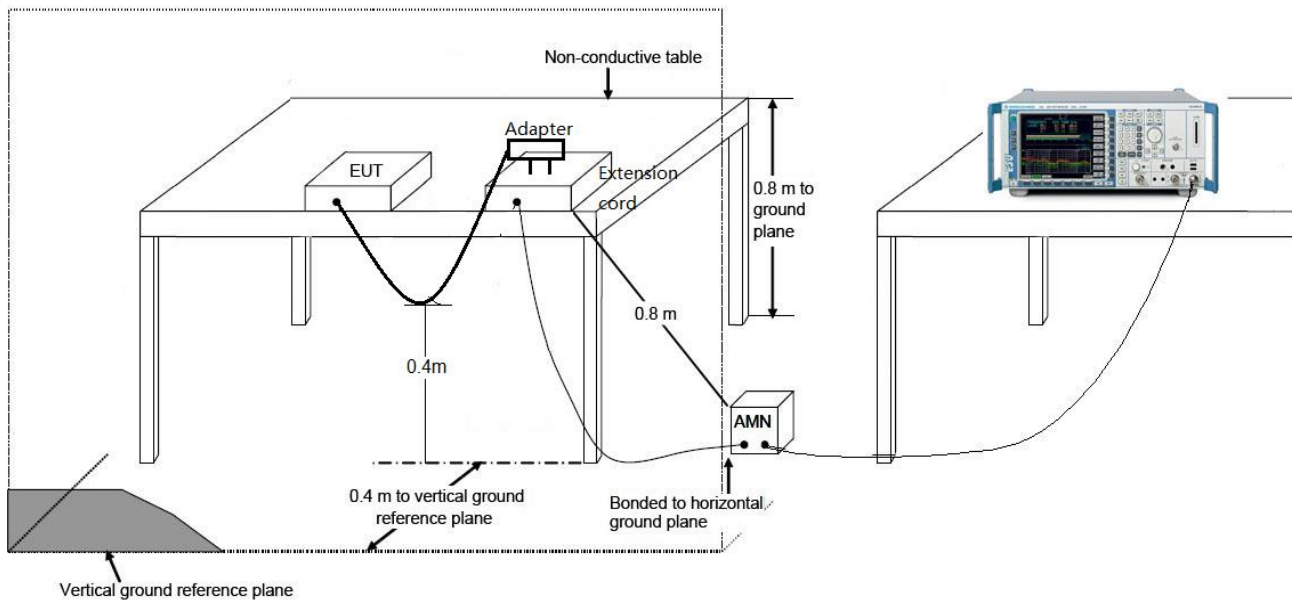

7.8.3. Test Result

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-11
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.1°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

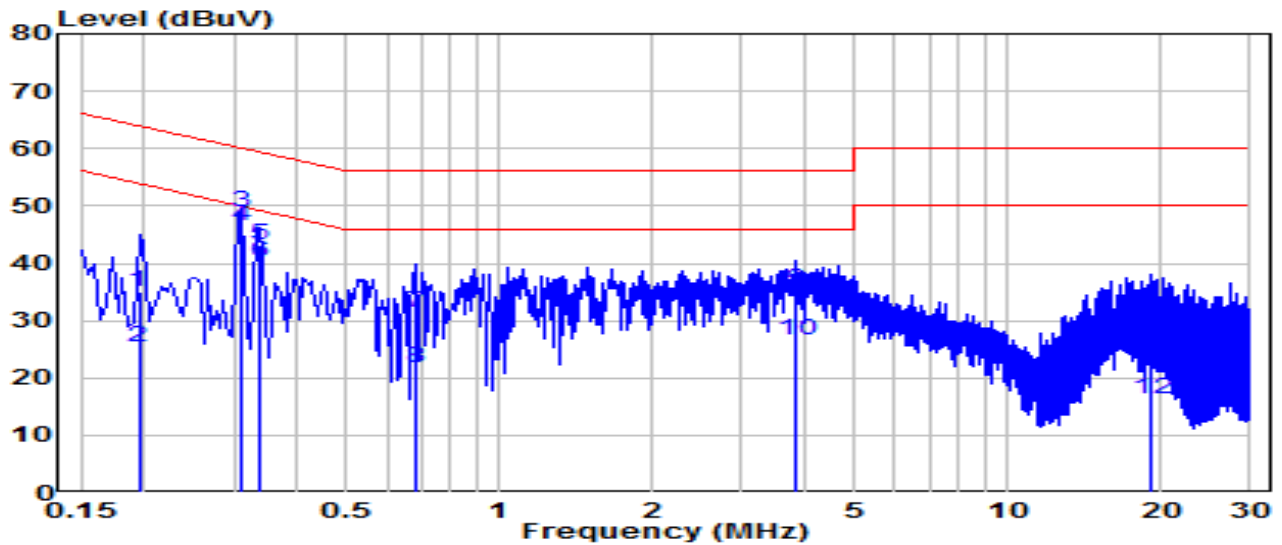


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.195	25.34	9.62	34.97	-28.85	63.82	QP
2	0.195	15.73	9.62	25.35	-28.47	53.82	Average
3	* 0.312	39.28	9.63	48.91	-11.00	59.92	QP
4	* 0.312	36.89	9.63	46.52	-3.40	49.92	Average
5	0.339	33.56	9.63	43.19	-16.04	59.23	QP
6	0.339	30.54	9.63	40.17	-9.06	49.23	Average
7	0.685	21.89	9.65	31.54	-24.46	56.00	QP
8	0.685	12.08	9.65	21.73	-24.27	46.00	Average
9	3.826	25.66	9.73	35.39	-20.61	56.00	QP
10	3.826	16.80	9.73	26.53	-19.47	46.00	Average
11	19.165	15.22	9.92	25.15	-34.85	60.00	QP
12	19.165	6.46	9.92	16.38	-33.62	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-11
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.1°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

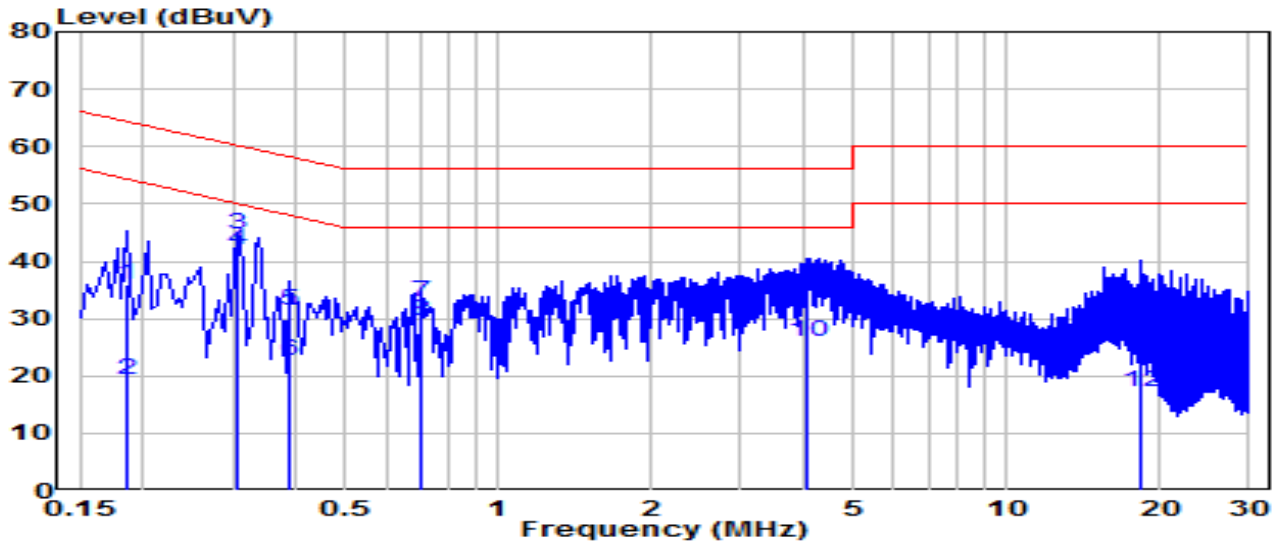


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.186	26.43	9.62	36.05	-28.16	64.21	QP
2	0.186	9.74	9.62	19.36	-34.85	54.21	Average
3	* 0.307	35.15	9.63	44.78	-15.25	60.04	QP
4	* 0.307	32.24	9.63	41.87	-8.16	50.04	Average
5	0.388	21.81	9.63	31.45	-26.65	58.10	QP
6	0.388	13.07	9.63	22.70	-25.39	48.10	Average
7	0.708	23.24	9.65	32.89	-23.11	56.00	QP
8	0.708	19.89	9.65	29.55	-16.45	46.00	Average
9	4.065	26.00	9.73	35.73	-20.27	56.00	QP
10	4.065	16.29	9.73	26.02	-19.98	46.00	Average
11	18.261	16.12	9.98	26.10	-33.90	60.00	QP
12	18.261	7.19	9.98	17.17	-32.83	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-11
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.1°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

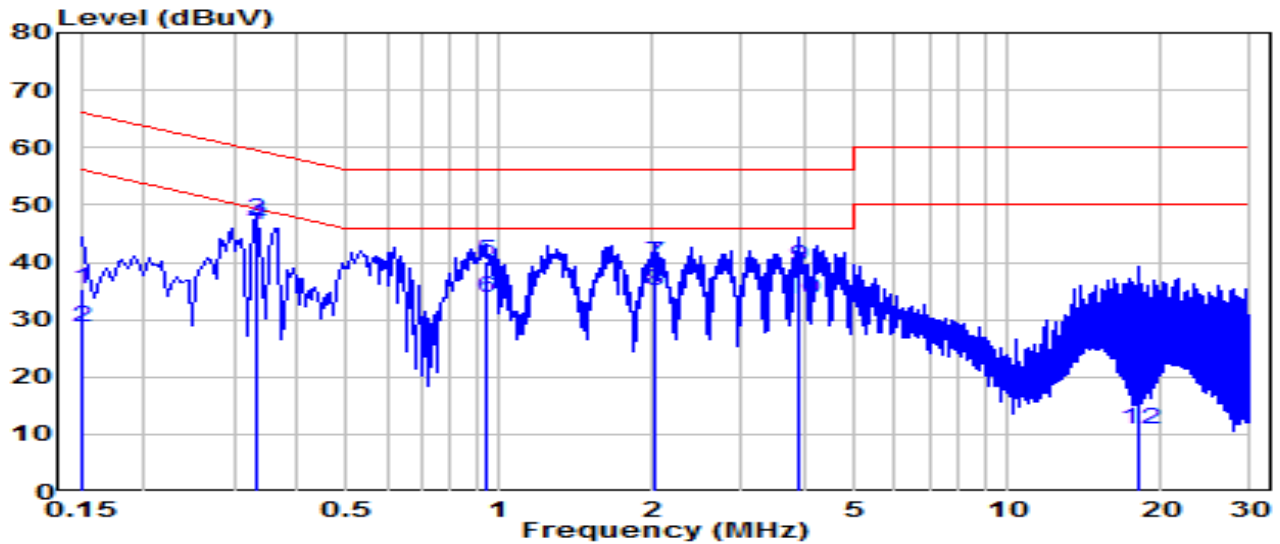


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	25.79	9.62	35.41	-30.59	66.00	QP
2	0.150	19.16	9.62	28.78	-27.22	56.00	Average
3	* 0.334	37.86	9.63	47.49	-11.85	59.34	QP
4	* 0.334	36.71	9.63	46.34	-3.00	49.34	Average
5	0.937	30.44	9.67	40.11	-15.89	56.00	QP
6	0.937	24.12	9.67	33.79	-12.21	46.00	Average
7	2.017	30.08	9.69	39.77	-16.23	56.00	QP
8	2.017	25.19	9.69	34.88	-11.12	46.00	Average
9	3.867	29.45	9.73	39.18	-16.82	56.00	QP
10	3.867	23.82	9.73	33.54	-12.46	46.00	Average
11	18.063	15.22	9.91	25.14	-34.86	60.00	QP
12	18.063	0.85	9.91	10.77	-39.23	50.00	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-11
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.1°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

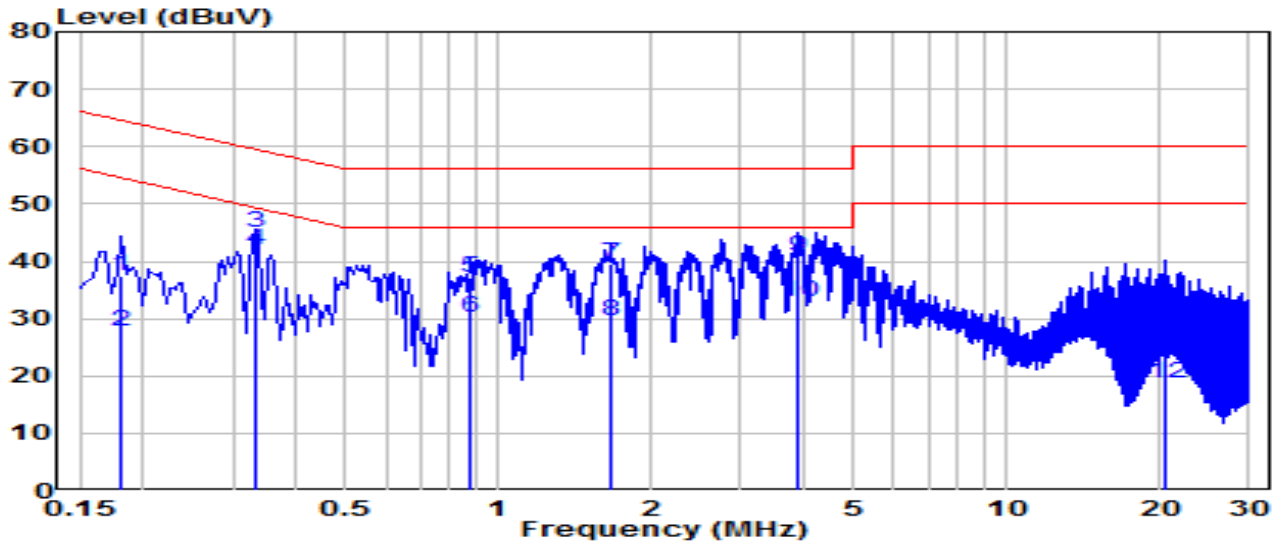

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.181	27.69	9.62	37.31	-27.11	64.42	QP
2	0.181	18.25	9.62	27.87	-26.55	54.42	Average
3	* 0.334	35.47	9.63	45.10	-14.24	59.34	QP
4	* 0.334	32.34	9.63	41.97	-7.37	49.34	Average
5	0.879	27.37	9.66	37.03	-18.97	56.00	QP
6	0.879	20.59	9.66	30.26	-15.74	46.00	Average
7	1.662	29.75	9.68	39.44	-16.56	56.00	QP
8	1.662	19.85	9.68	29.54	-16.46	46.00	Average
9	3.867	31.13	9.73	40.86	-15.14	56.00	QP
10	3.867	23.23	9.73	32.95	-13.05	46.00	Average
11	20.470	15.89	10.00	25.89	-34.11	60.00	QP
12	20.470	8.77	10.00	18.77	-31.23	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

————— The End —————

Appendix A : Test Setup Photograph

Refer to "2209TW0101-Setup Photo" file.

Appendix B : External Photograph

Refer to "2209TW0101-External Photo" file.

Appendix C : Internal Photograph

Refer to "2209TW0101-Internal Photo" file.