

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10-2013 Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

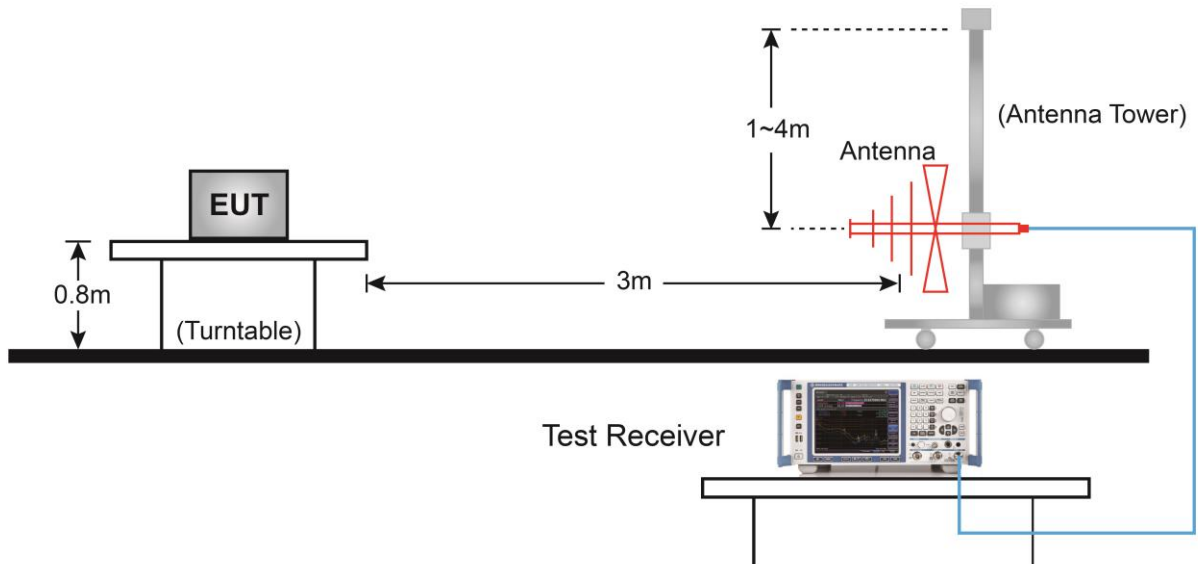


Above 1GHz Test Setup:

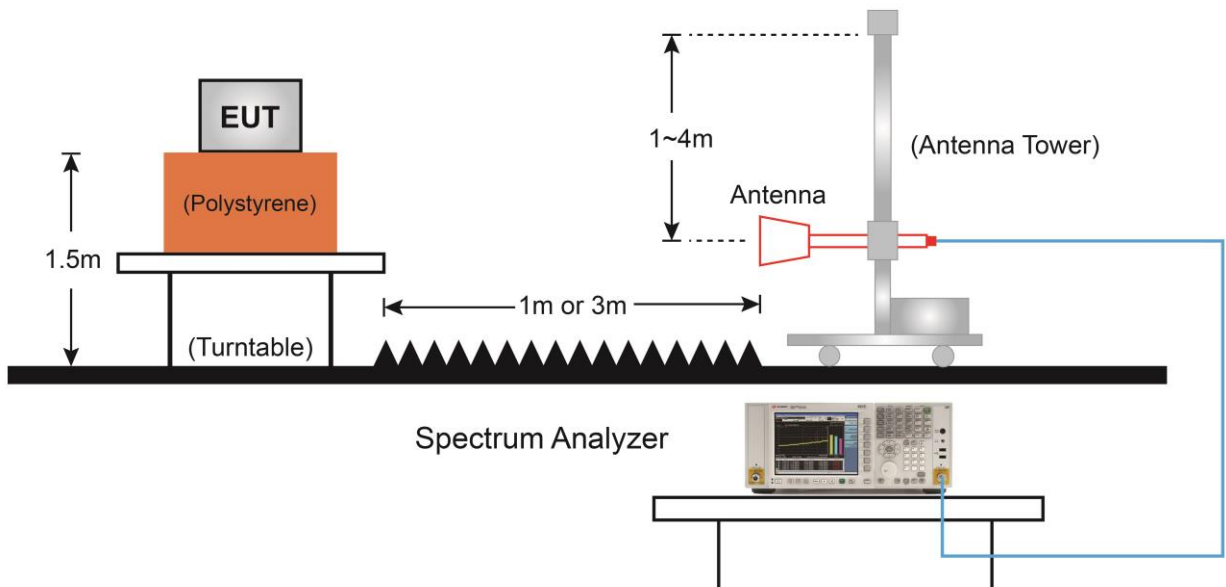

7.6.5. Test Result

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

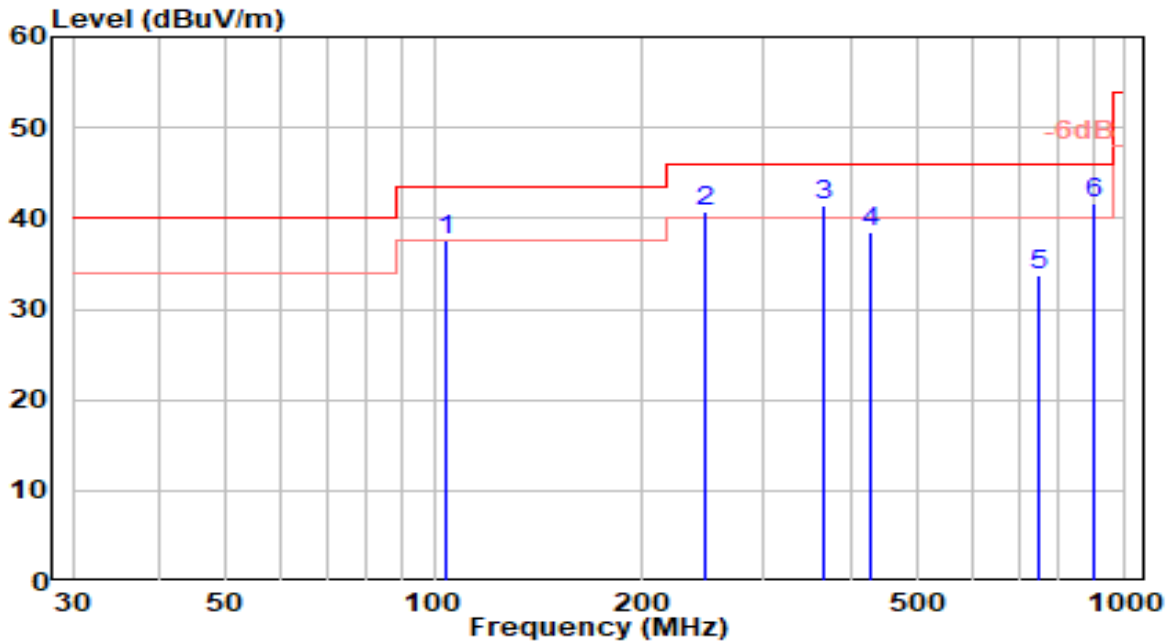


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	103.720	18.51	19.15	37.65	-5.85	43.50	200	263	QP
2	246.310	20.20	20.64	40.84	-5.16	46.00	150	96	QP
3	364.650	18.20	23.27	41.47	-4.53	46.00	100	46	QP
4	429.640	14.20	24.27	38.47	-7.53	46.00	150	193	QP
5	750.710	4.23	29.61	33.84	-12.16	46.00	100	59	QP
6	* 902.030	9.98	31.64	41.62	-4.38	46.00	150	295	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-14
Factor	VULB 9162	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

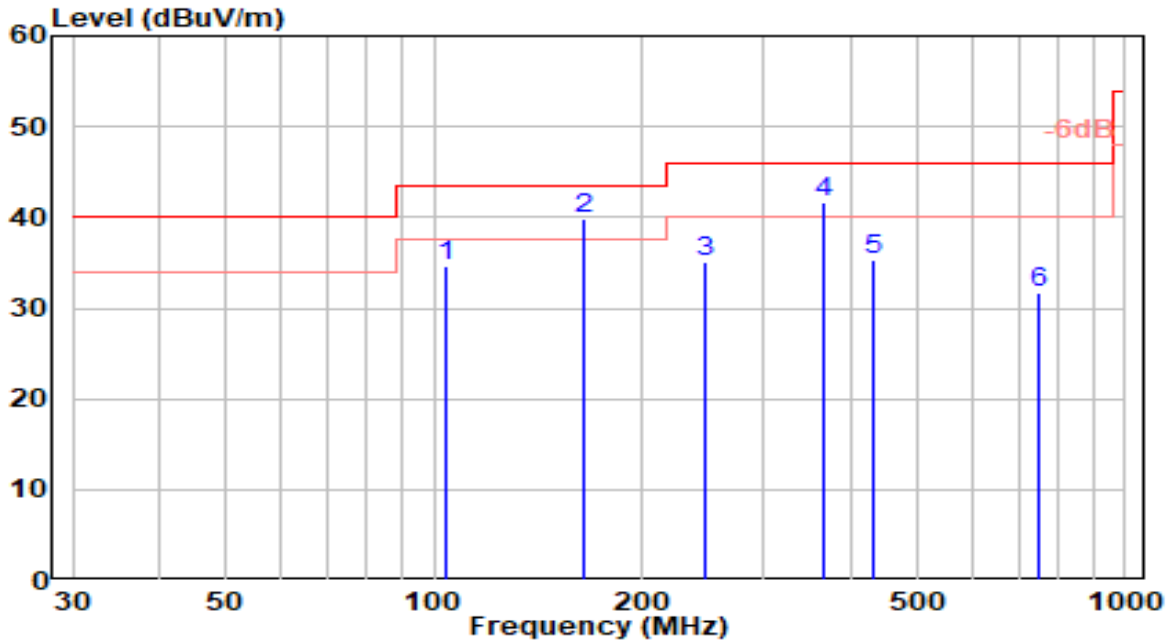


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	103.720	15.51	19.15	34.66	-8.84	43.50	100	5	QP
2	* 164.830	23.50	16.46	39.96	-3.54	43.50	100	360	QP
3	246.310	14.36	20.64	35.00	-11.00	46.00	150	167	QP
4	366.590	18.31	23.31	41.62	-4.38	46.00	150	130	QP
5	430.610	11.08	24.28	35.35	-10.65	46.00	150	113	QP
6	750.710	2.12	29.61	31.72	-14.28	46.00	200	0	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

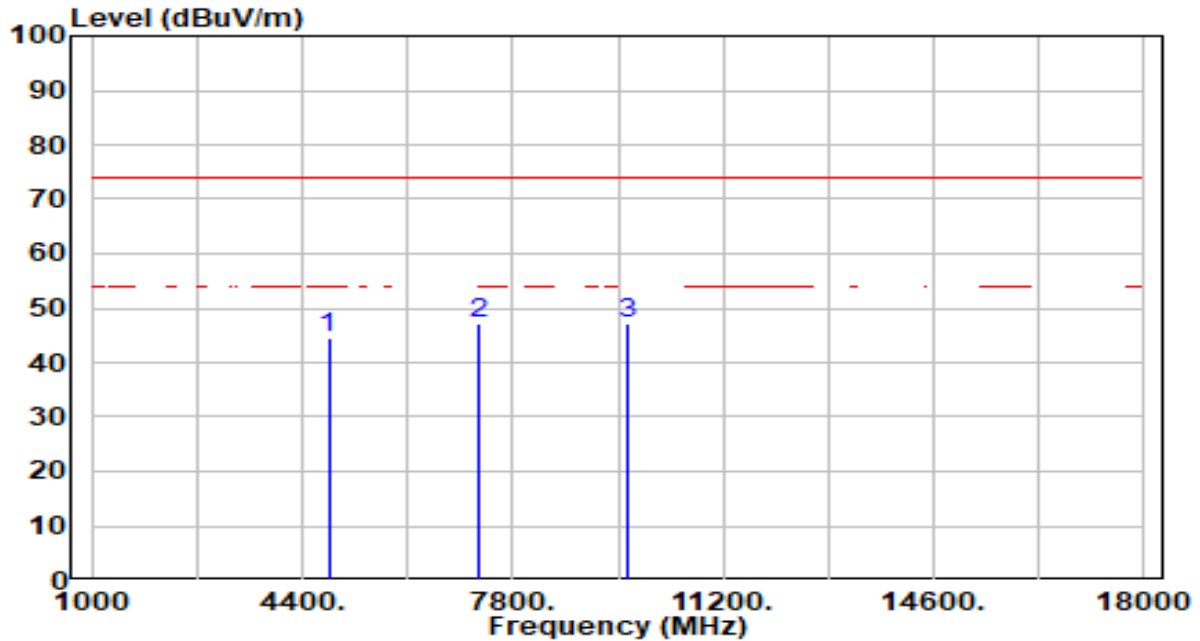


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	44.14	0.25	44.39	-29.61	74.00	200	240	Peak
2	* 7236.000	41.39	5.81	47.20	-26.80	74.00	174	360	Peak
3	9648.000	41.86	5.32	47.19	-26.81	74.00	200	214	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

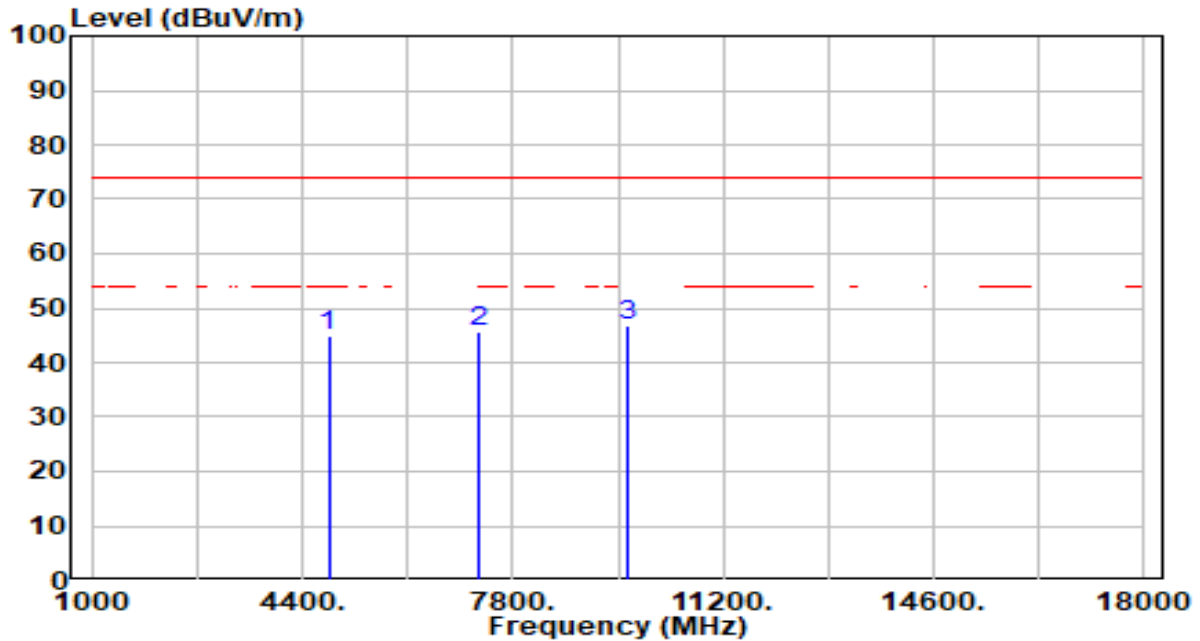


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	44.72	0.25	44.97	-29.03	74.00	100	154	Peak
2	7236.000	39.82	5.81	45.63	-28.37	74.00	200	229	Peak
3	* 9648.000	41.38	5.32	46.70	-27.30	74.00	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

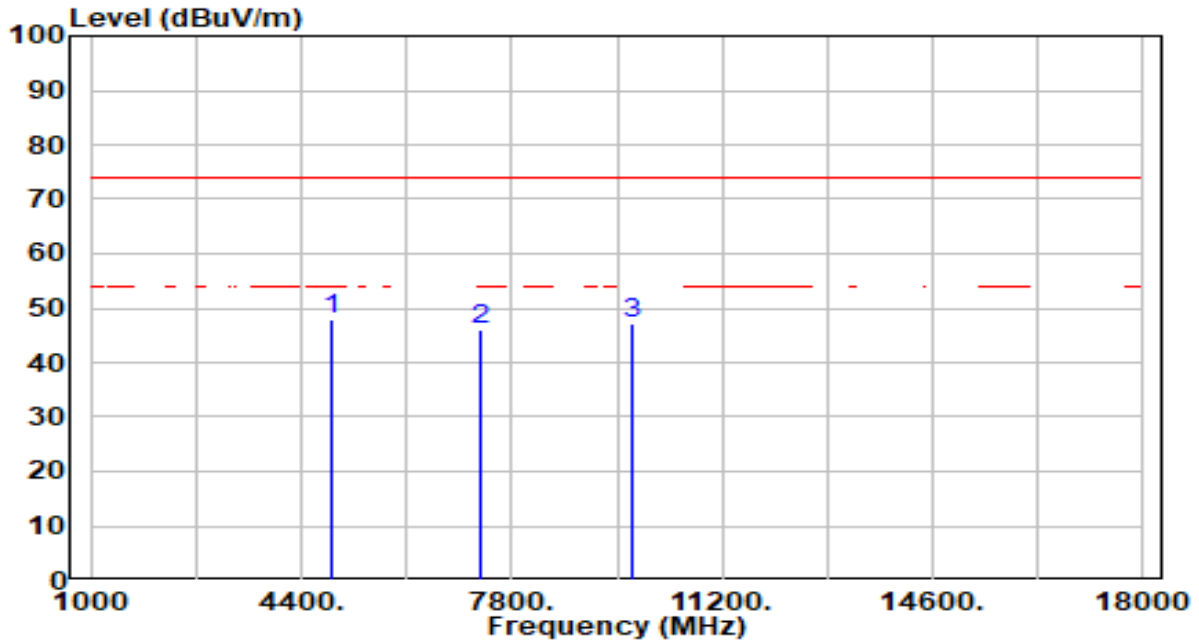


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4874.000	47.60	0.35	47.95	-26.05	74.00	200	248	Peak
2	7311.000	40.06	5.79	45.85	-28.15	74.00	200	288	Peak
3	9748.000	41.78	5.34	47.12	-26.88	74.00	200	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

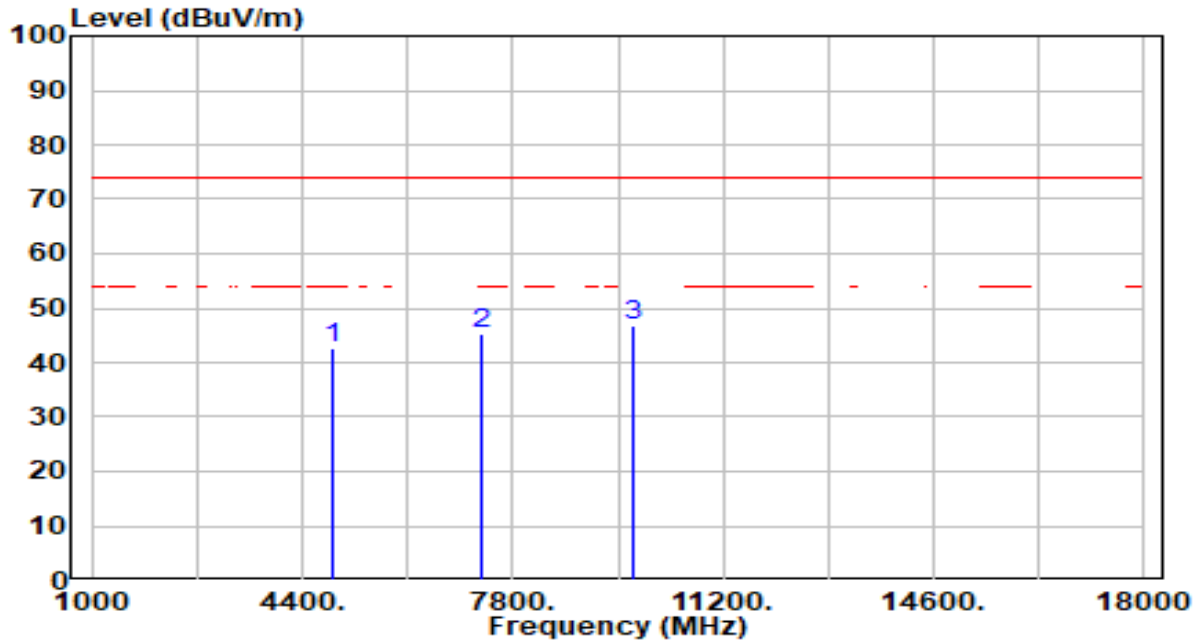


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.45	0.35	42.81	-31.19	74.00	200	143	Peak
2	7311.000	39.43	5.79	45.22	-28.78	74.00	200	140	Peak
3	* 9748.000	41.33	5.34	46.67	-27.33	74.00	200	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

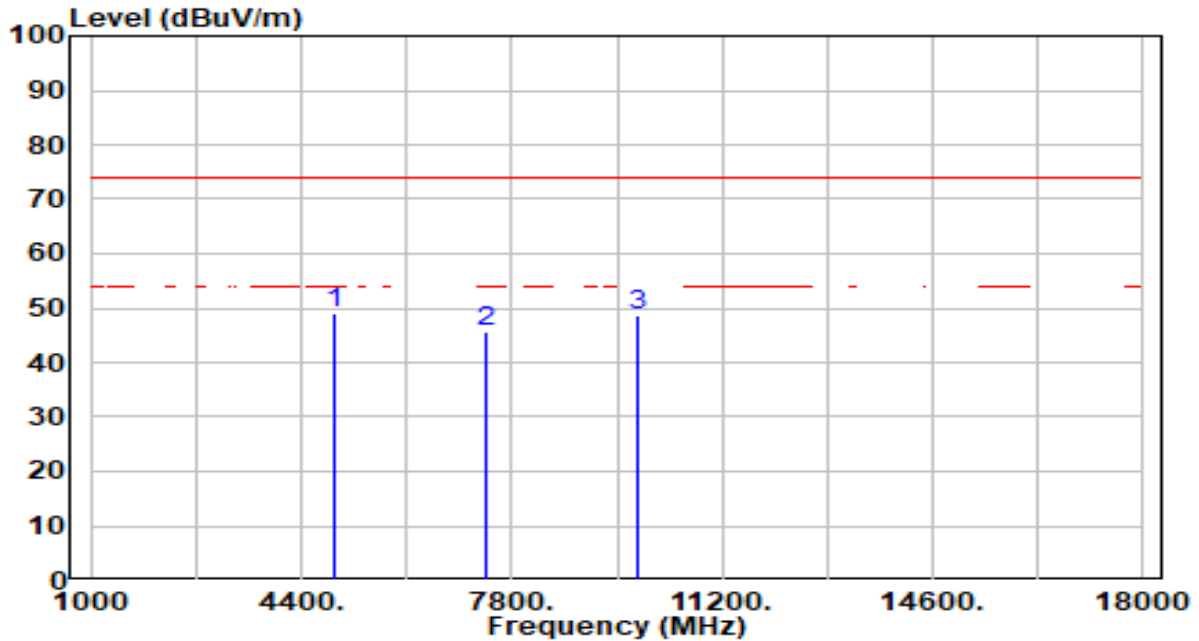


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4924.000	48.59	0.45	49.04	-24.96	74.00	200	245	Peak
2	7386.000	40.02	5.77	45.80	-28.20	74.00	200	233	Peak
3	9848.000	43.29	5.38	48.66	-25.34	74.00	200	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

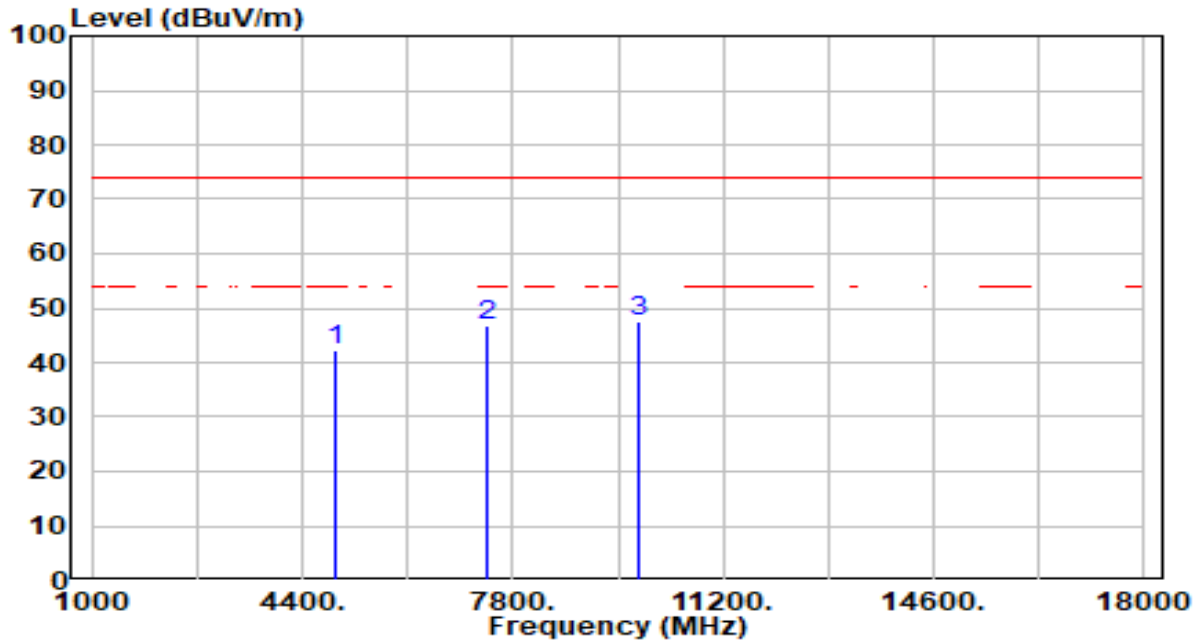


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.82	0.45	42.27	-31.73	74.00	200	159	Peak
2	7386.000	41.13	5.77	46.90	-27.10	74.00	200	294	Peak
3	* 9848.000	41.99	5.38	47.37	-26.63	74.00	200	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

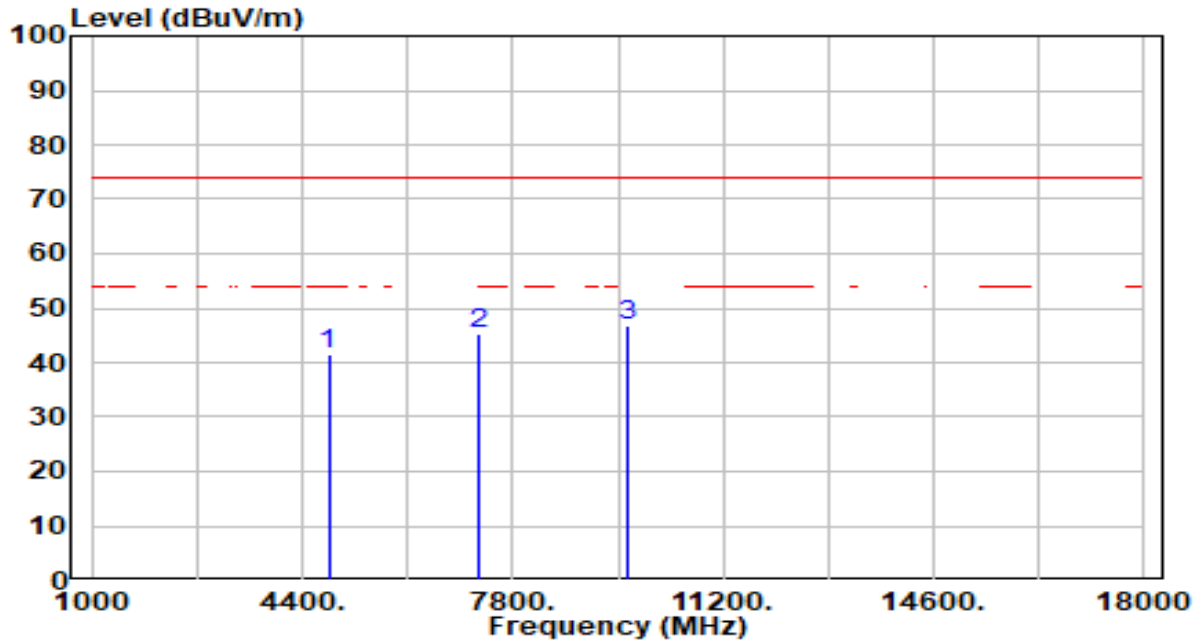


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.29	0.25	41.54	-32.46	74.00	200	244	Peak
2	7236.000	39.49	5.81	45.30	-28.70	74.00	200	147	Peak
3	* 9648.000	41.42	5.32	46.75	-27.25	74.00	200	262	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

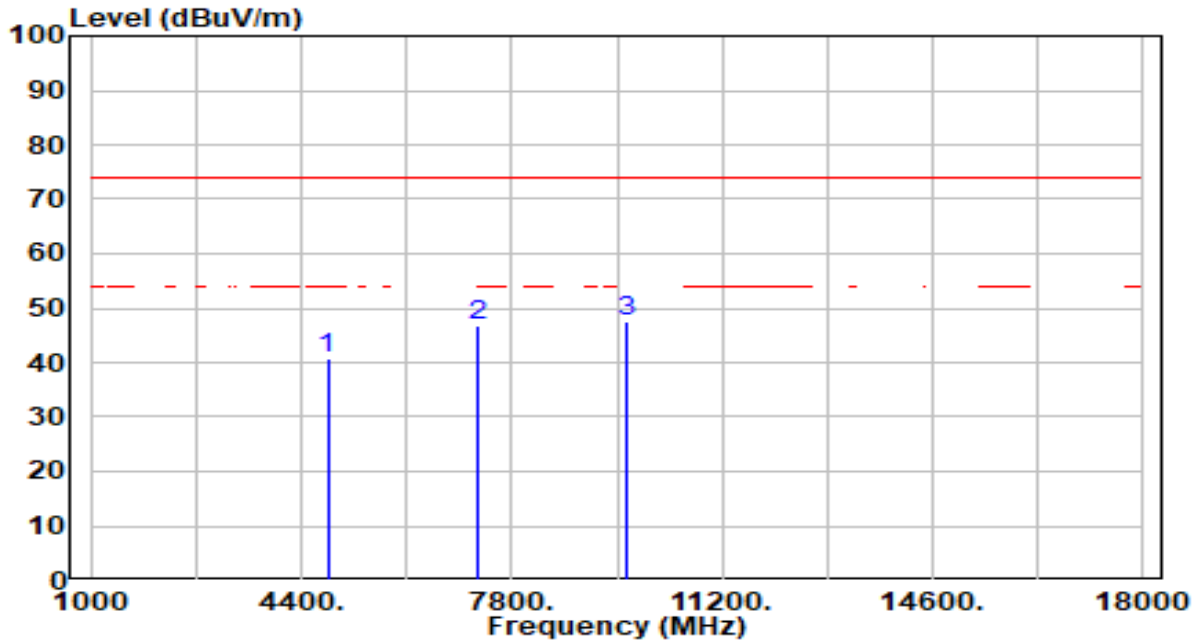


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.65	0.25	40.90	-33.10	74.00	200	360	Peak
2	7236.000	41.12	5.81	46.93	-27.07	74.00	200	152	Peak
3	* 9648.000	42.32	5.32	47.64	-26.36	74.00	200	269	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

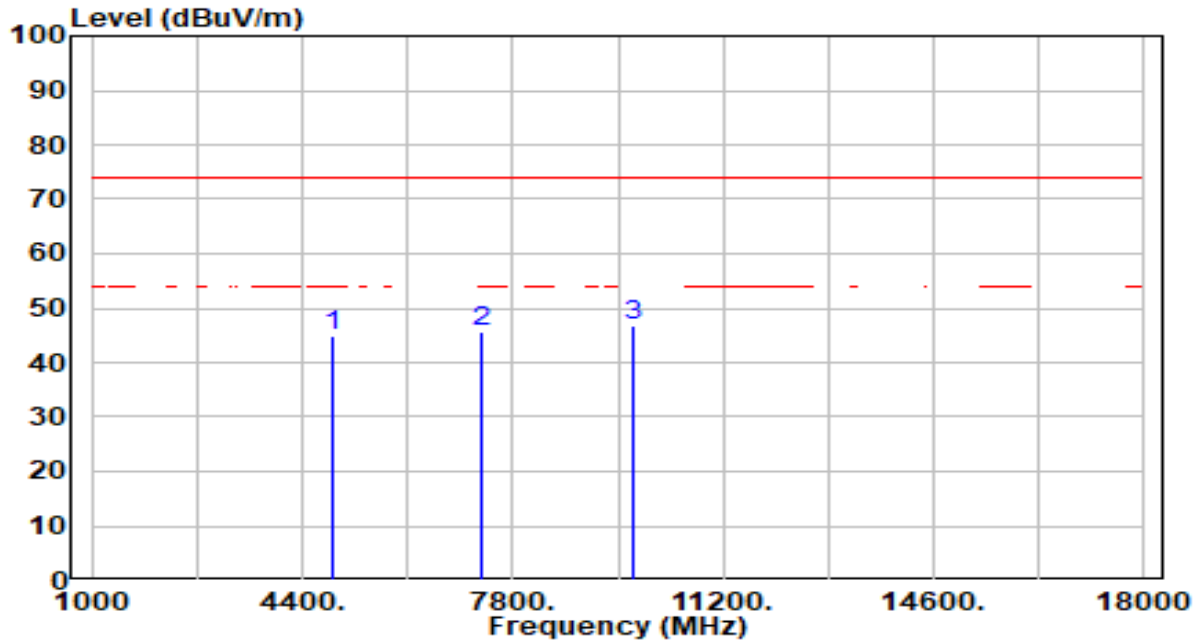


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.65	0.35	45.00	-29.00	74.00	200	237	Peak
2	7311.000	39.83	5.79	45.63	-28.37	74.00	200	303	Peak
3	* 9748.000	41.29	5.34	46.63	-27.37	74.00	200	336	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

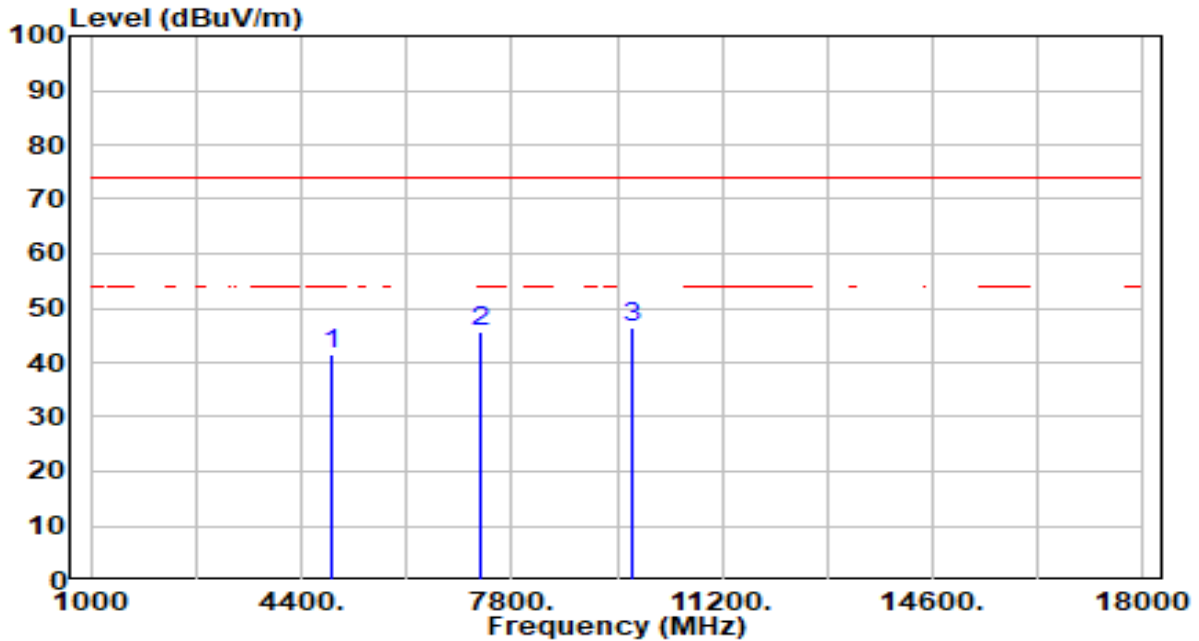


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.14	0.35	41.49	-32.51	74.00	200	213	Peak
2	7311.000	39.77	5.79	45.56	-28.44	74.00	200	306	Peak
3	* 9748.000	41.24	5.34	46.58	-27.42	74.00	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

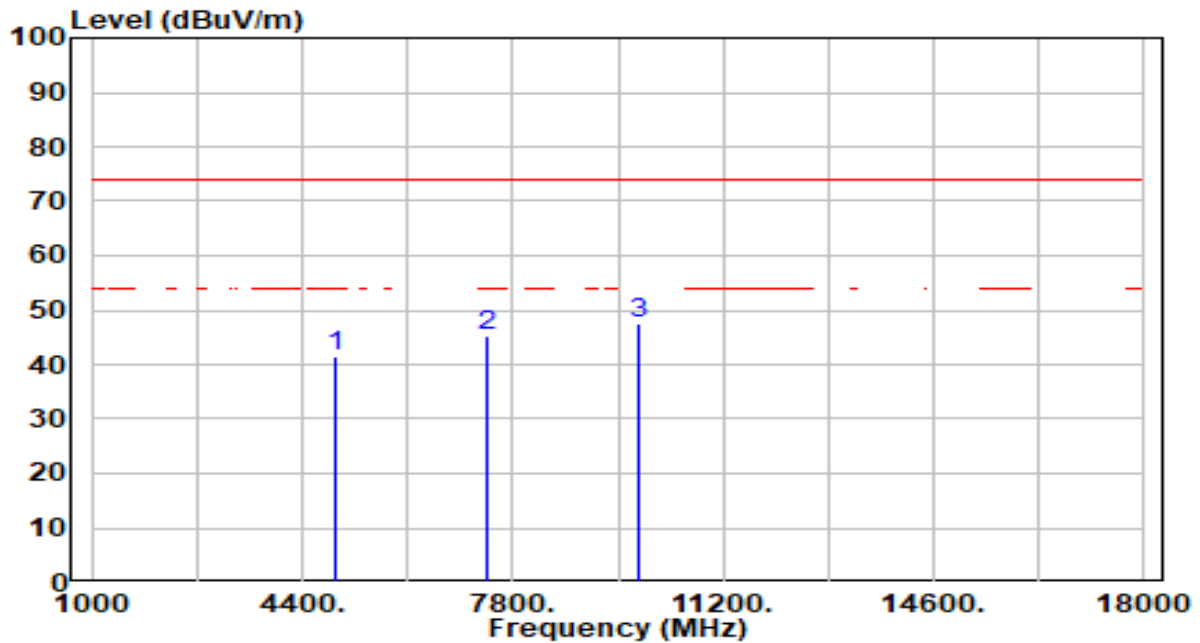


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.05	0.45	41.51	-32.49	74.00	200	119	Peak
2	7386.000	39.69	5.77	45.46	-28.54	74.00	200	179	Peak
3	* 9848.000	42.31	5.38	47.69	-26.31	74.00	200	317	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

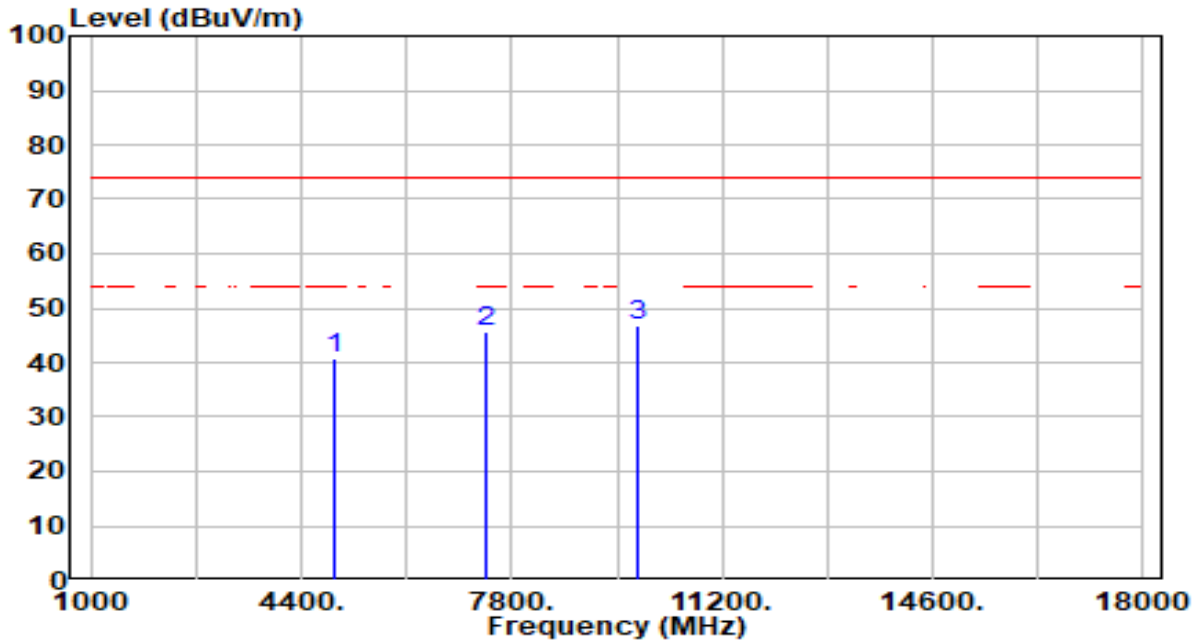


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.34	0.45	40.79	-33.21	74.00	200	46	Peak
2	7386.000	40.06	5.77	45.83	-28.17	74.00	200	356	Peak
3	* 9848.000	41.52	5.38	46.90	-27.10	74.00	200	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

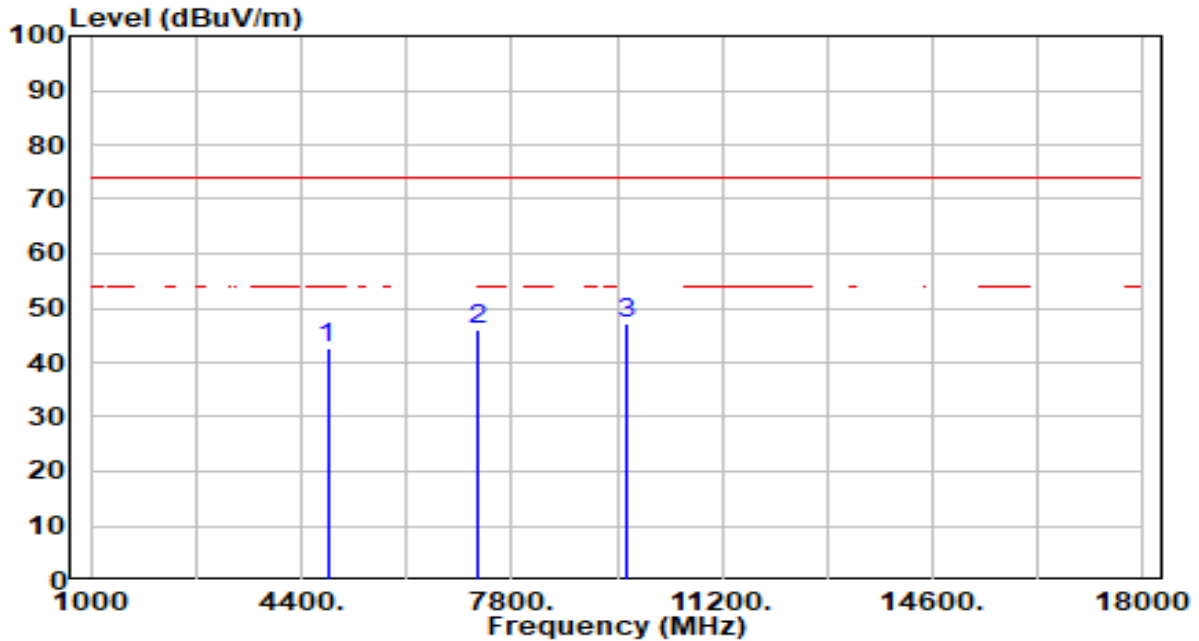


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.22	0.25	42.47	-31.53	74.00	200	114	Peak
2	7236.000	40.10	5.81	45.92	-28.08	74.00	200	6	Peak
3	* 9648.000	41.77	5.32	47.09	-26.91	74.00	200	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

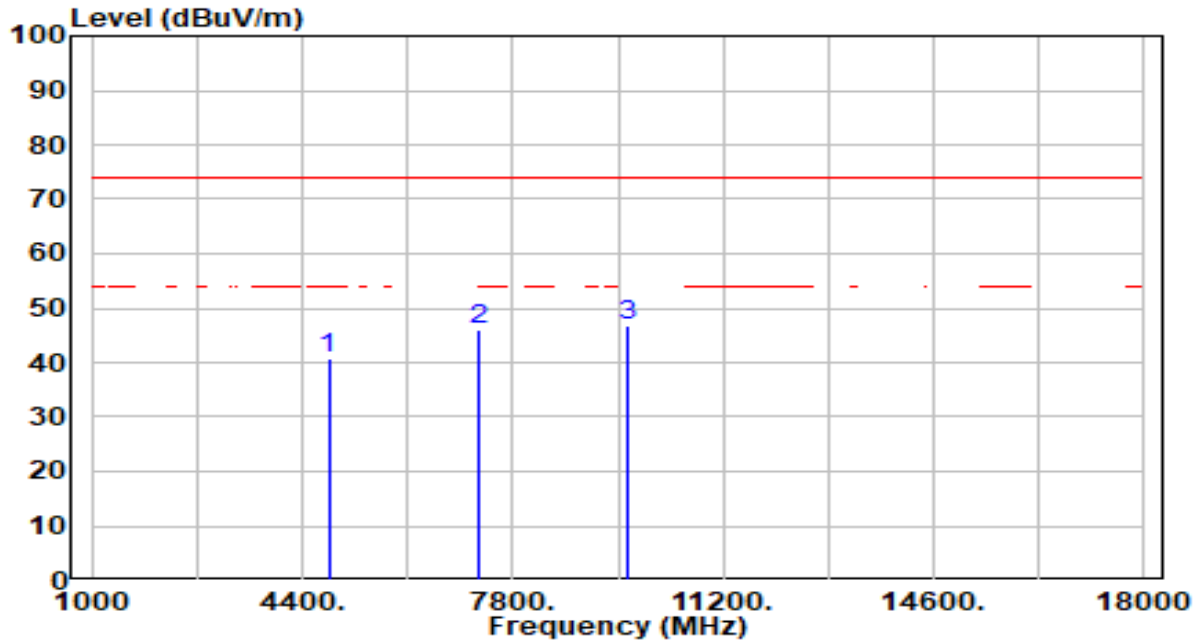


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.62	0.25	40.87	-33.13	74.00	200	19	Peak
2	7236.000	40.07	5.81	45.88	-28.12	74.00	200	34	Peak
3	* 9648.000	41.37	5.32	46.69	-27.31	74.00	200	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

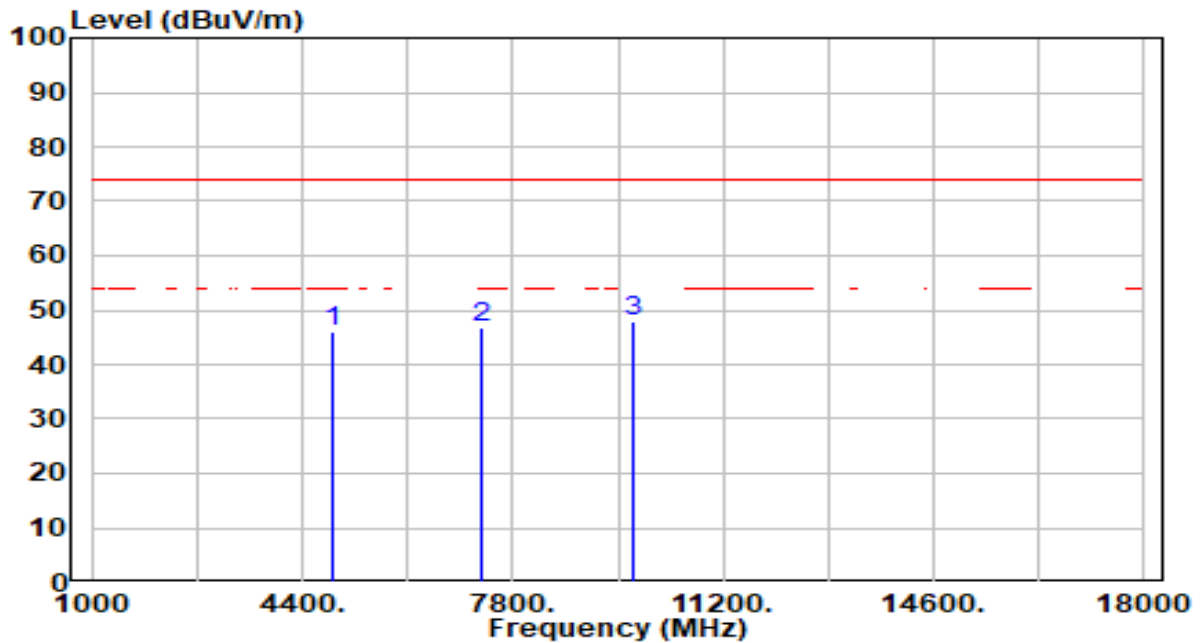


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	45.53	0.35	45.89	-28.11	74.00	200	122	Peak
2	7311.000	41.01	5.79	46.80	-27.20	74.00	200	56	Peak
3	* 9748.000	42.55	5.34	47.89	-26.11	74.00	200	128	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

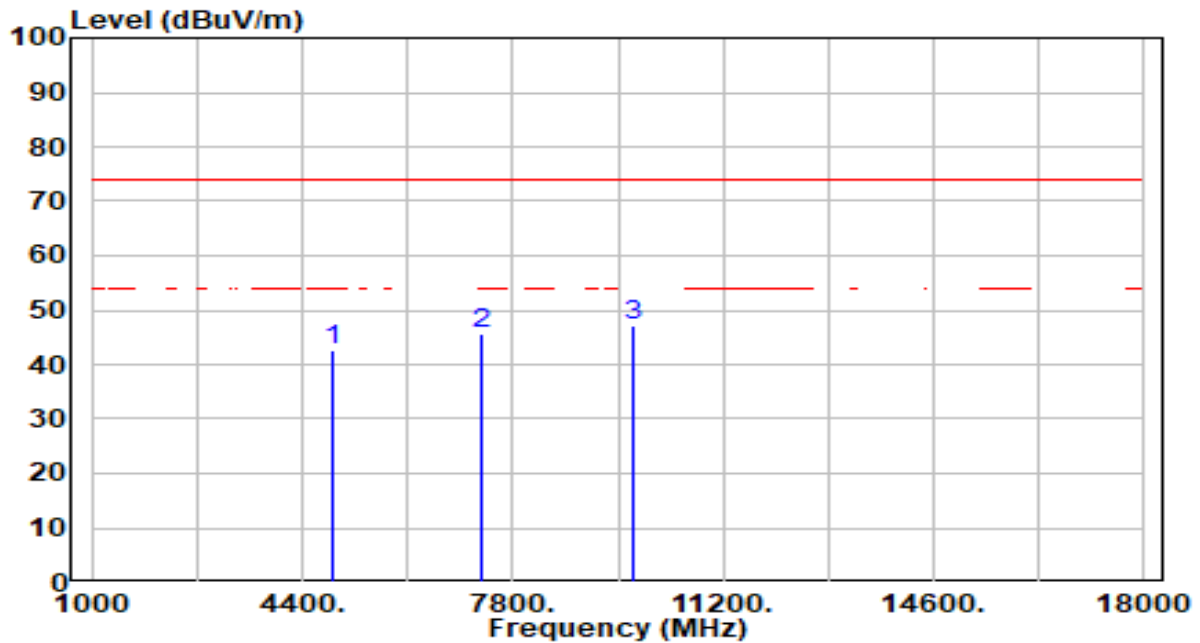


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.46	0.35	42.81	-31.19	74.00	200	35	Peak
2	7311.000	39.89	5.79	45.68	-28.32	74.00	200	253	Peak
3	* 9748.000	42.02	5.34	47.36	-26.64	74.00	200	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

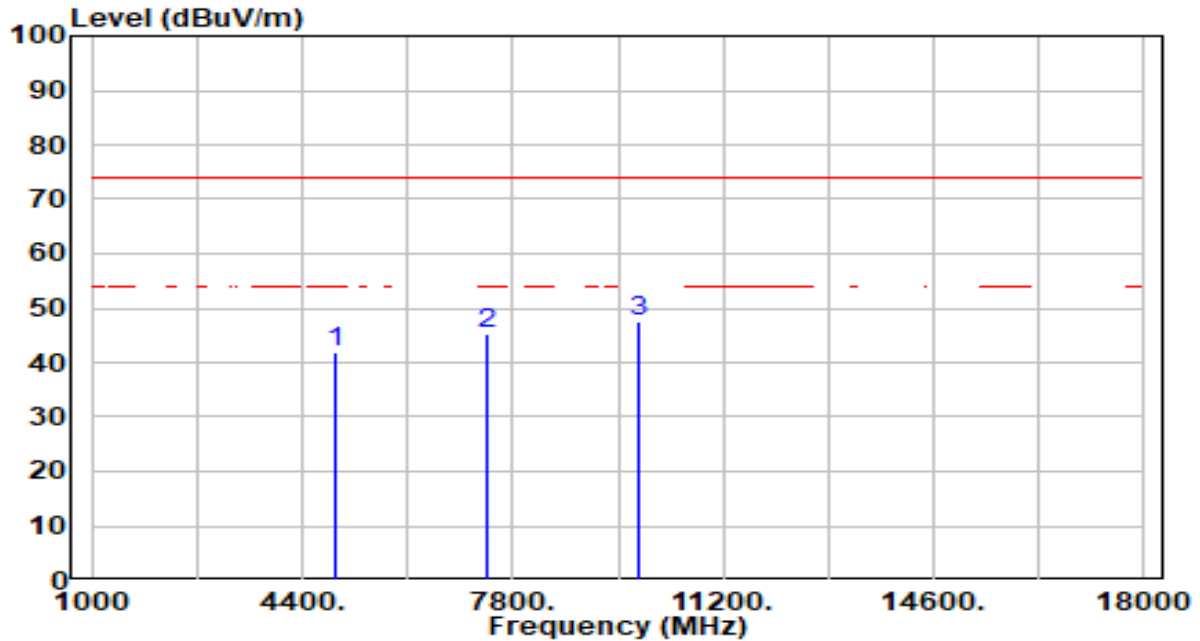


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.55	0.45	42.00	-32.00	74.00	200	97	Peak
2	7386.000	39.58	5.77	45.35	-28.65	74.00	200	19	Peak
3	* 9848.000	42.19	5.38	47.57	-26.43	74.00	200	58	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

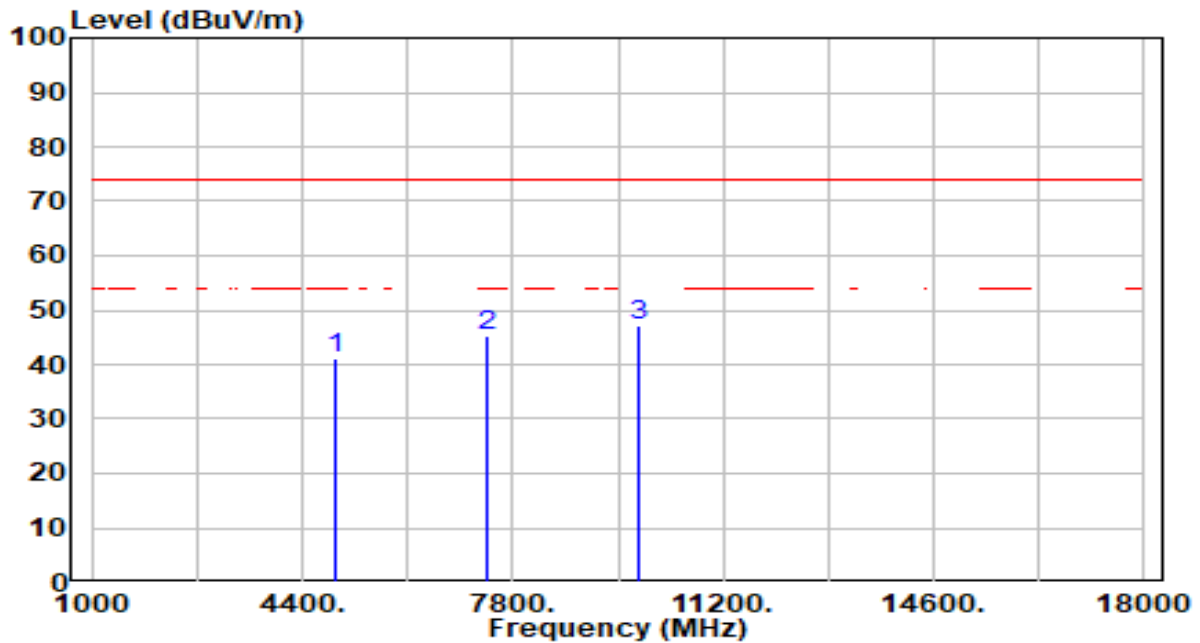


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.69	0.45	41.14	-32.86	74.00	200	344	Peak
2	7386.000	39.62	5.77	45.39	-28.61	74.00	200	212	Peak
3	* 9848.000	41.70	5.38	47.08	-26.92	74.00	200	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

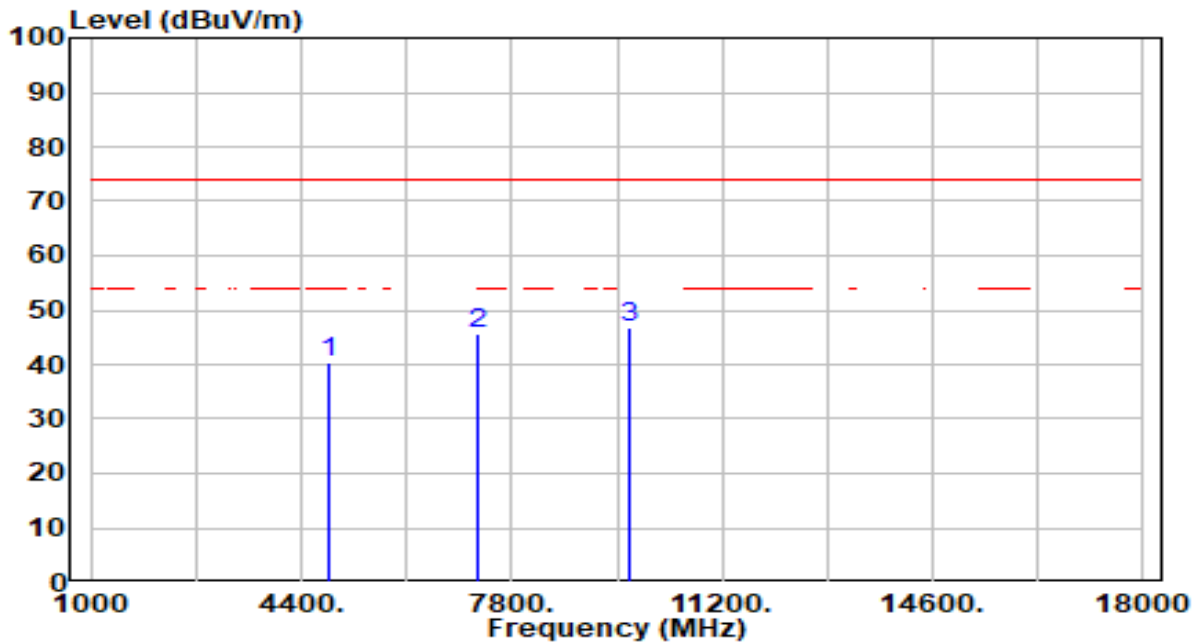


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.22	0.29	40.51	-33.49	74.00	200	67	Peak
2	7266.000	39.83	5.81	45.64	-28.36	74.00	200	169	Peak
3	* 9688.000	41.37	5.33	46.70	-27.30	74.00	200	254	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

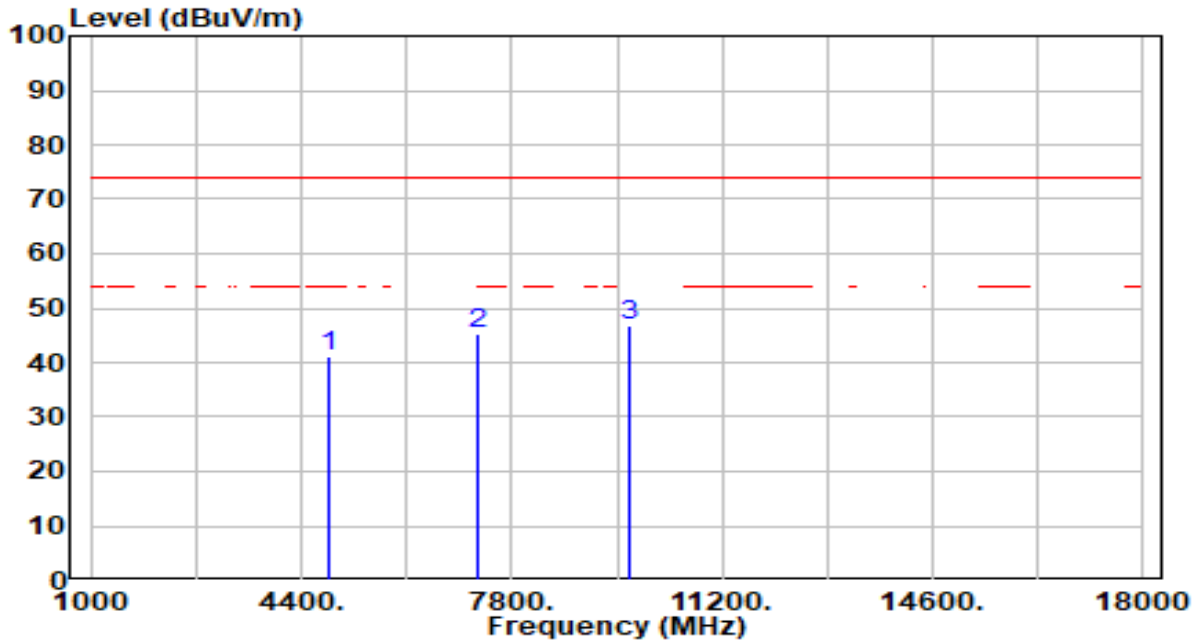


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.91	0.29	41.20	-32.80	74.00	200	279	Peak
2	7266.000	39.37	5.81	45.17	-28.83	74.00	200	207	Peak
3	* 9688.000	41.36	5.33	46.69	-27.31	74.00	200	155	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

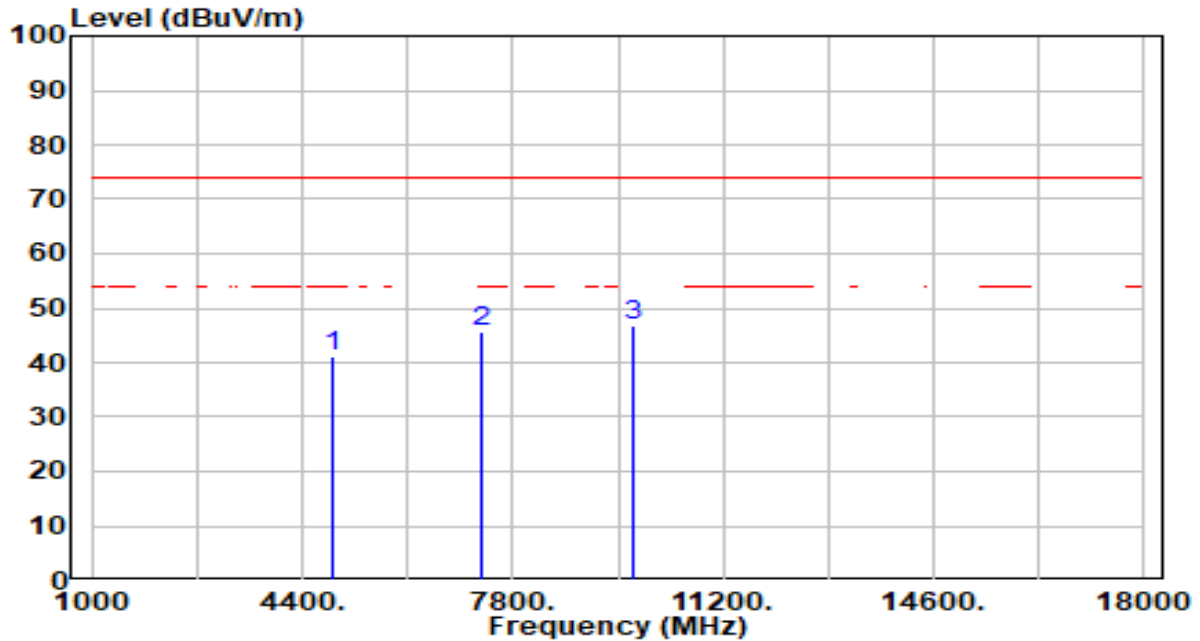


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.71	0.35	41.06	-32.94	74.00	200	0	Peak
2	7311.000	39.88	5.79	45.68	-28.32	74.00	200	360	Peak
3	* 9748.000	41.41	5.34	46.75	-27.25	74.00	200	51	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

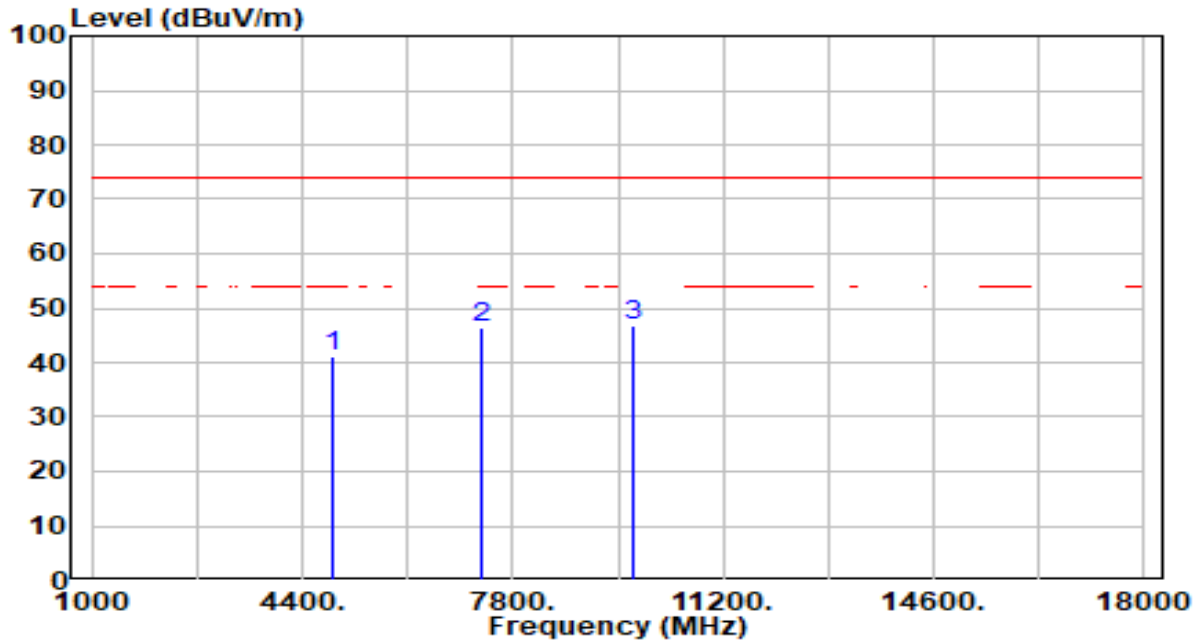


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.75	0.35	41.11	-32.89	74.00	200	268	Peak
2	7311.000	40.72	5.79	46.51	-27.49	74.00	200	112	Peak
3	* 9748.000	41.37	5.34	46.71	-27.29	74.00	200	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

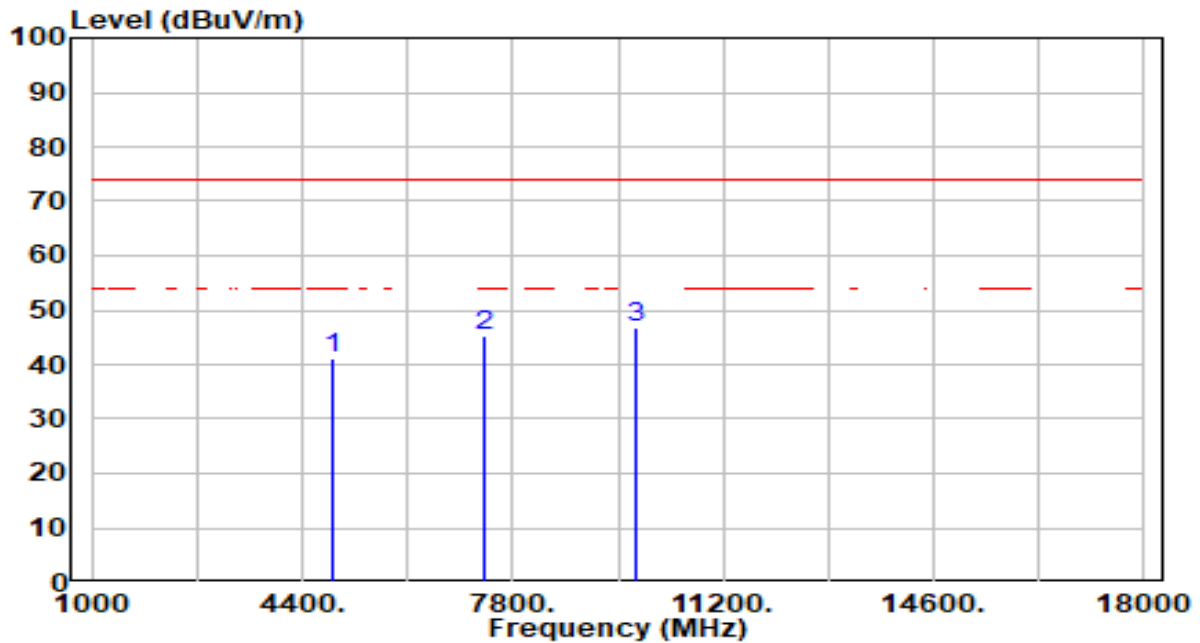


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.70	0.41	41.12	-32.88	74.00	200	304	Peak
2	7356.000	39.48	5.78	45.27	-28.73	74.00	200	156	Peak
3	* 9808.000	41.51	5.35	46.86	-27.14	74.00	200	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

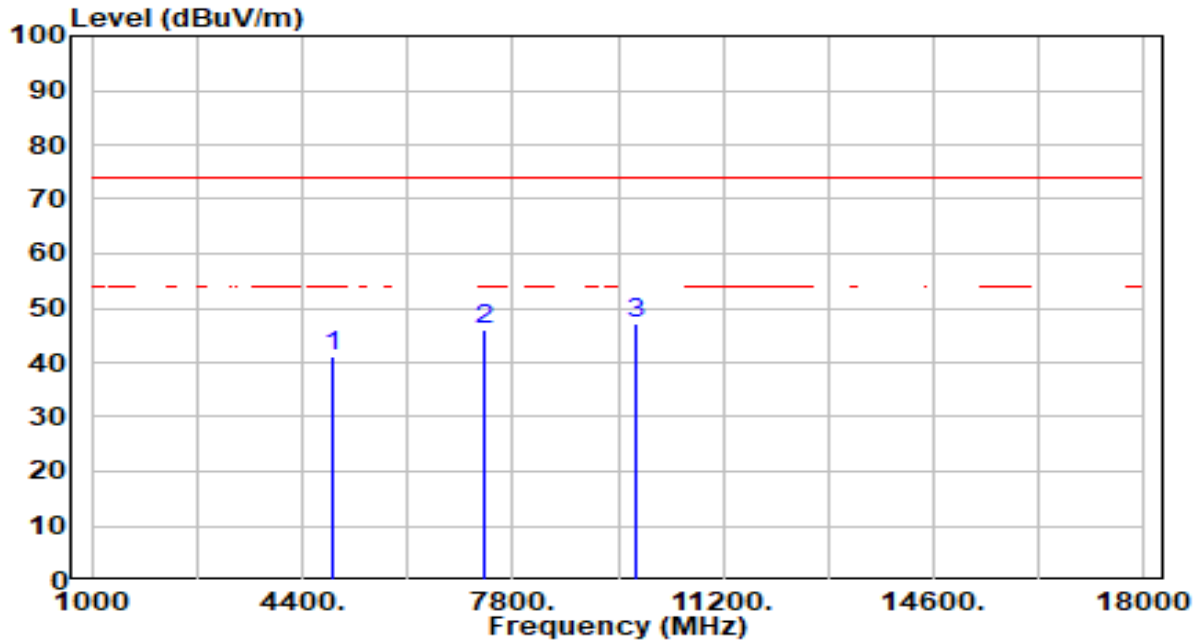


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.53	0.41	40.95	-33.05	74.00	200	248	Peak
2	7356.000	40.18	5.78	45.96	-28.04	74.00	200	112	Peak
3	* 9808.000	41.75	5.35	47.11	-26.89	74.00	200	61	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

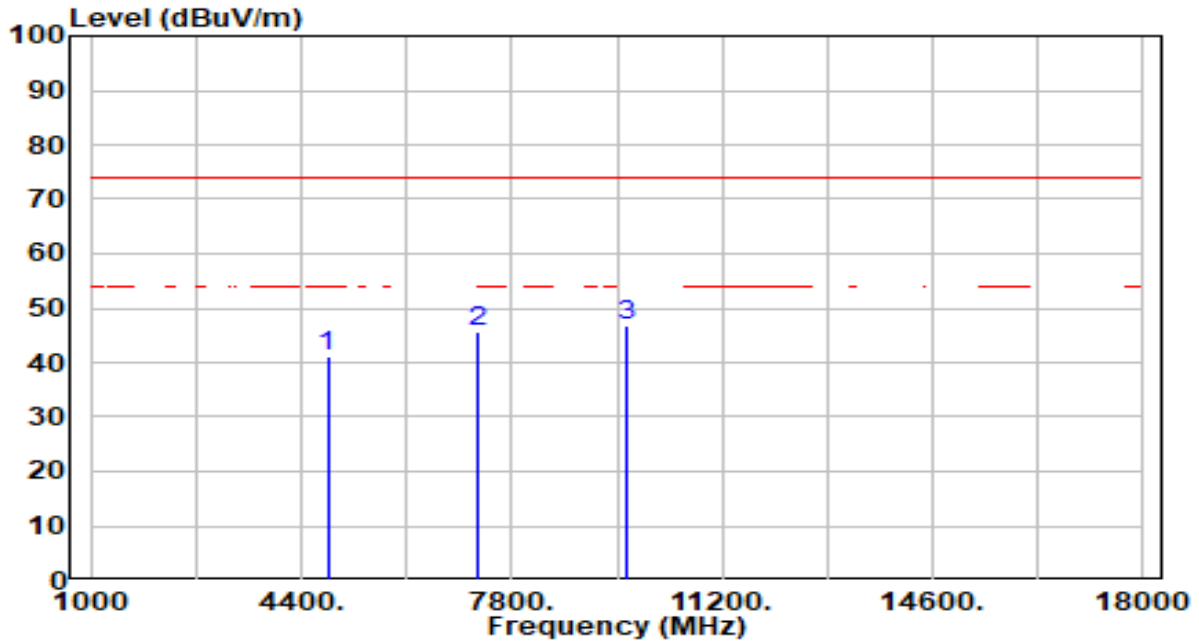


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.01	0.25	41.27	-32.73	74.00	200	343	Peak
2	7236.000	39.96	5.81	45.77	-28.23	74.00	200	107	Peak
3	* 9648.000	41.43	5.32	46.75	-27.25	74.00	200	288	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

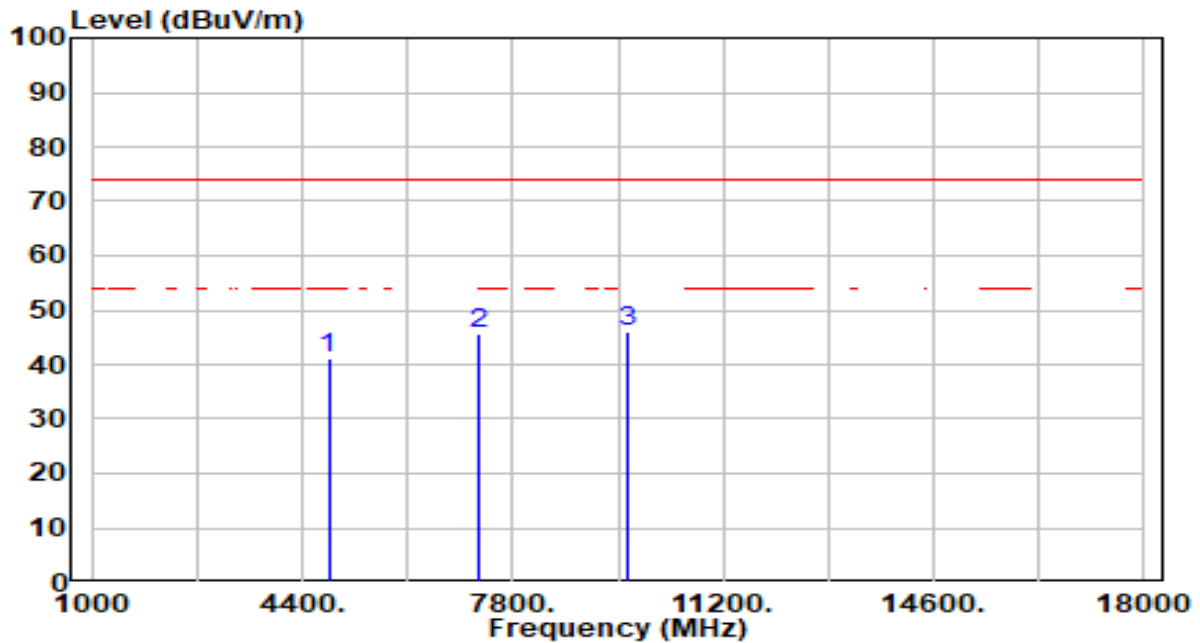


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.70	0.25	40.95	-33.05	74.00	200	26	Peak
2	7236.000	39.79	5.81	45.60	-28.40	74.00	200	244	Peak
3	* 9648.000	40.75	5.32	46.08	-27.92	74.00	200	234	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

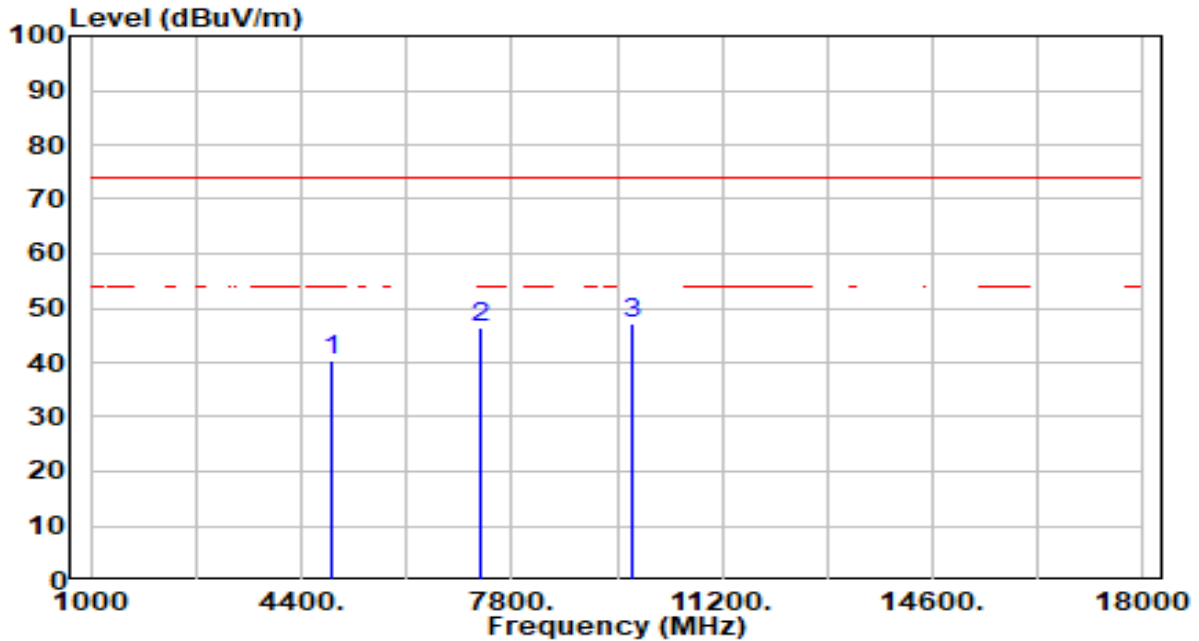


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.15	0.35	40.50	-33.50	74.00	200	19	Peak
2	7311.000	40.63	5.79	46.42	-27.58	74.00	200	296	Peak
3	* 9748.000	41.94	5.34	47.28	-26.72	74.00	200	260	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

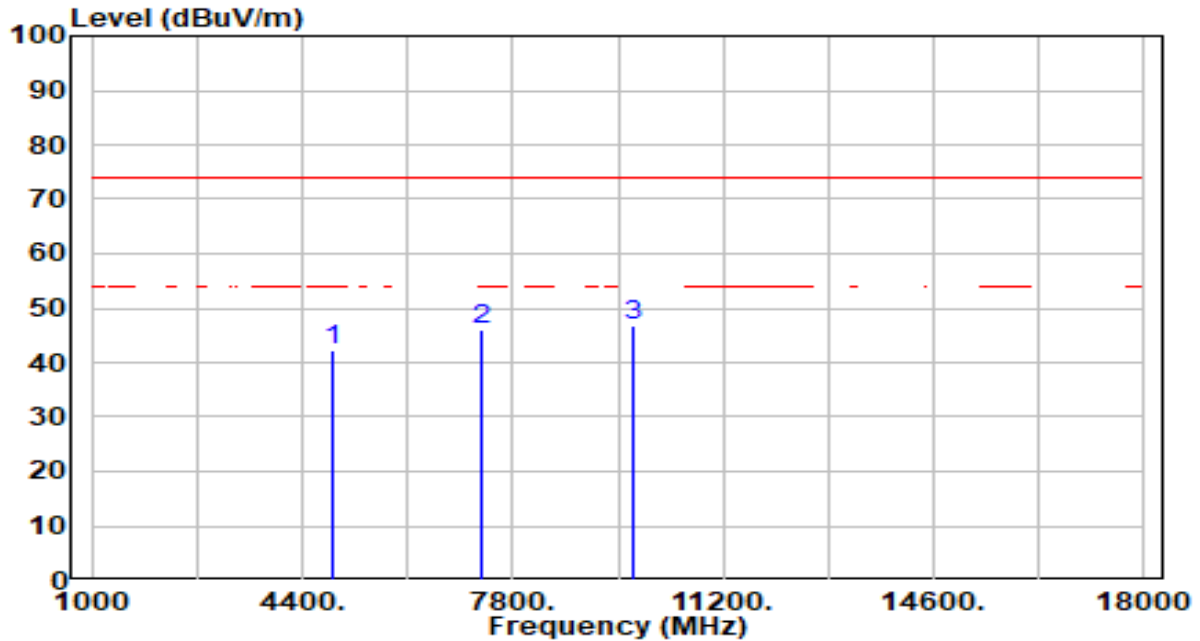


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.89	0.35	42.24	-31.76	74.00	200	344	Peak
2	7311.000	40.10	5.79	45.90	-28.10	74.00	200	260	Peak
3	* 9748.000	41.44	5.34	46.78	-27.22	74.00	200	4	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

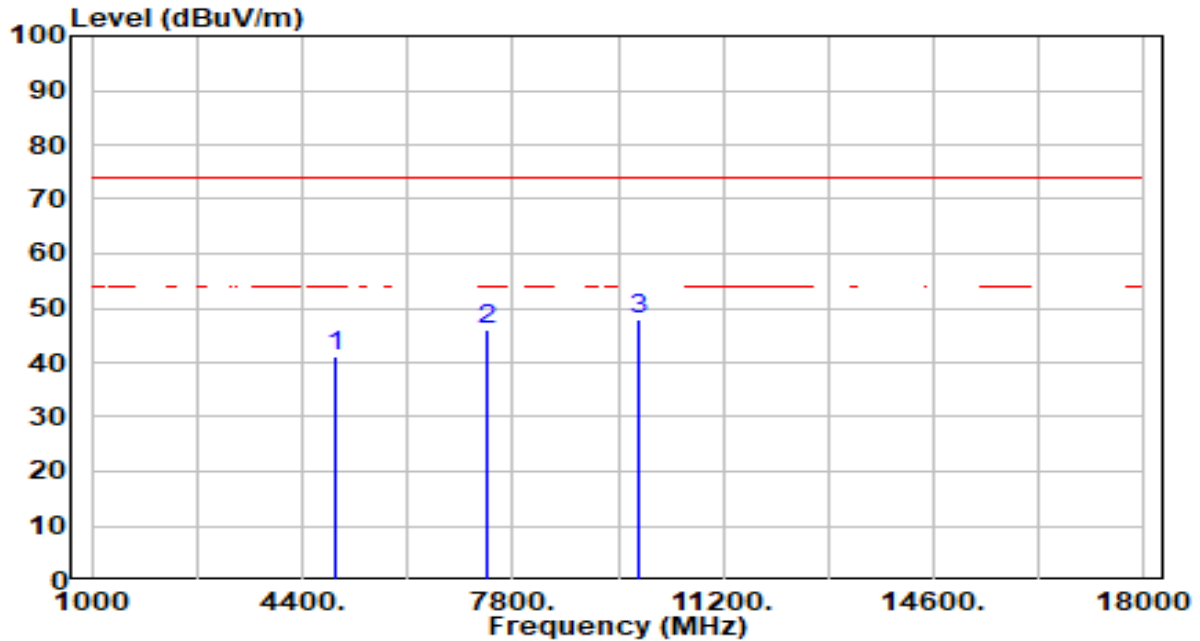


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.63	0.45	41.09	-32.91	74.00	200	157	Peak
2	7386.000	40.09	5.77	45.86	-28.14	74.00	200	127	Peak
3	* 9848.000	42.53	5.38	47.91	-26.09	74.00	200	4	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

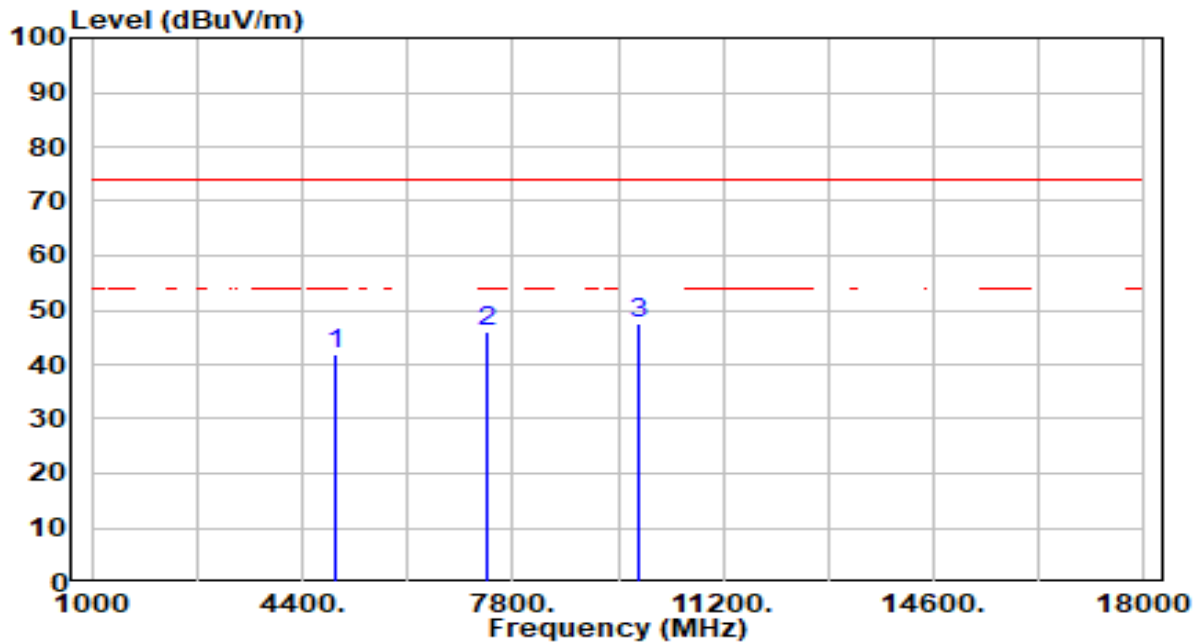


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.48	0.45	41.93	-32.07	74.00	200	257	Peak
2	7386.000	40.11	5.77	45.88	-28.12	74.00	200	254	Peak
3	* 9848.000	42.02	5.38	47.40	-26.60	74.00	200	85	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

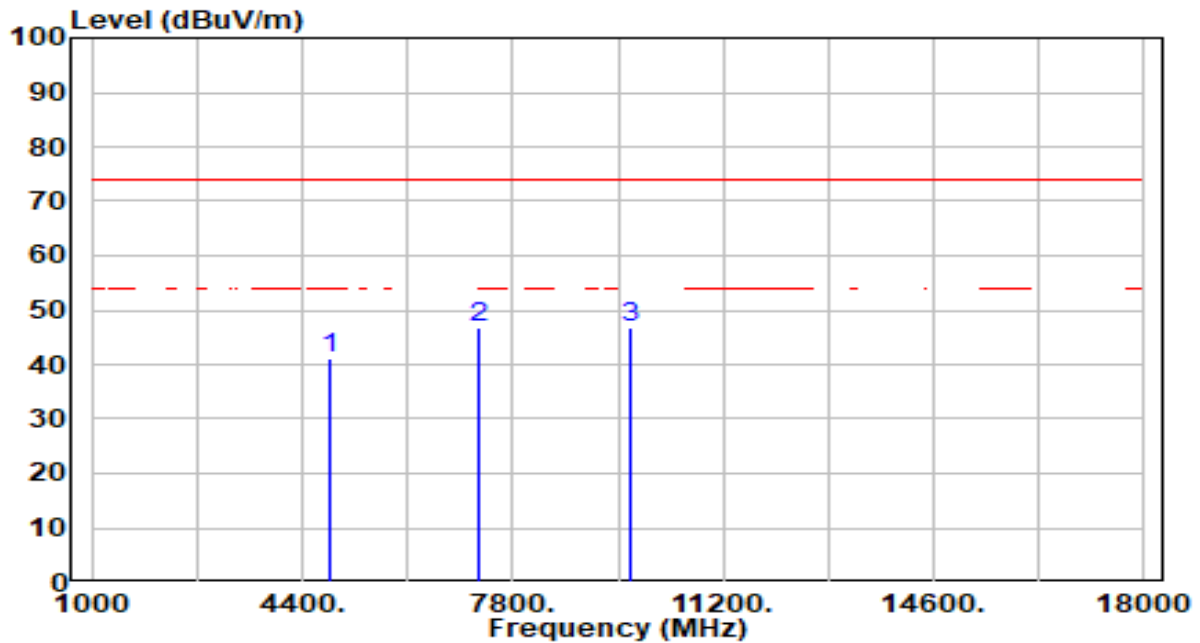


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.99	0.29	41.28	-32.72	74.00	200	186	Peak
2	7266.000	40.85	5.81	46.65	-27.35	74.00	200	147	Peak
3	* 9688.000	41.43	5.33	46.76	-27.24	74.00	200	240	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

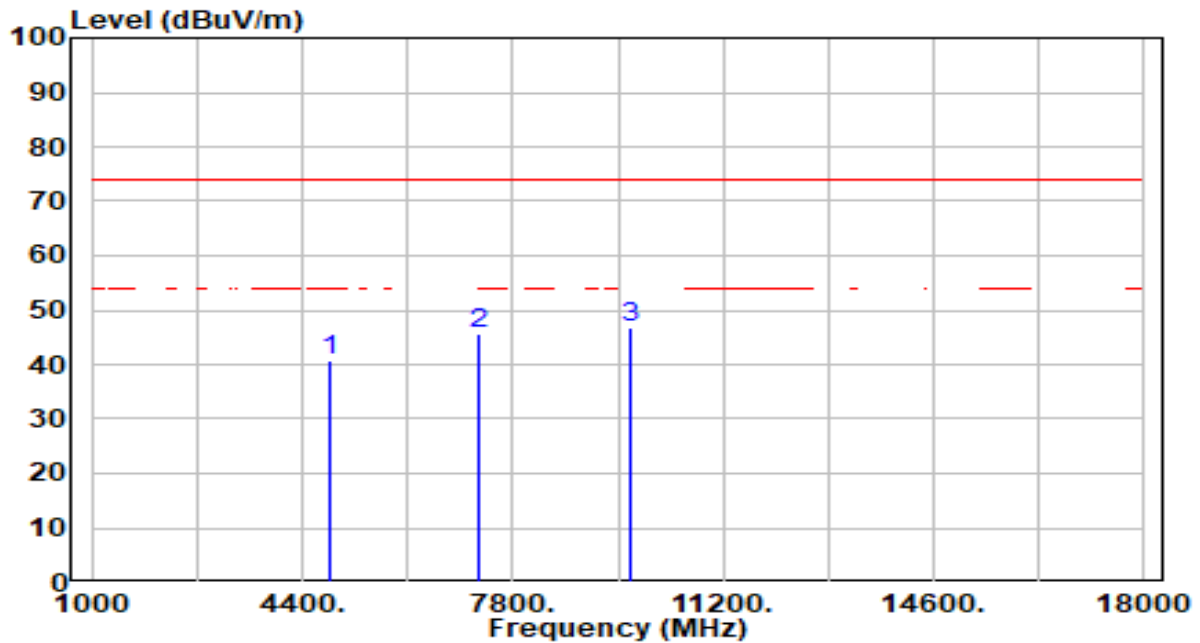


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.45	0.29	40.74	-33.26	74.00	200	123	Peak
2	7266.000	39.88	5.81	45.68	-28.32	74.00	200	150	Peak
3	* 9688.000	41.65	5.33	46.98	-27.02	74.00	200	42	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

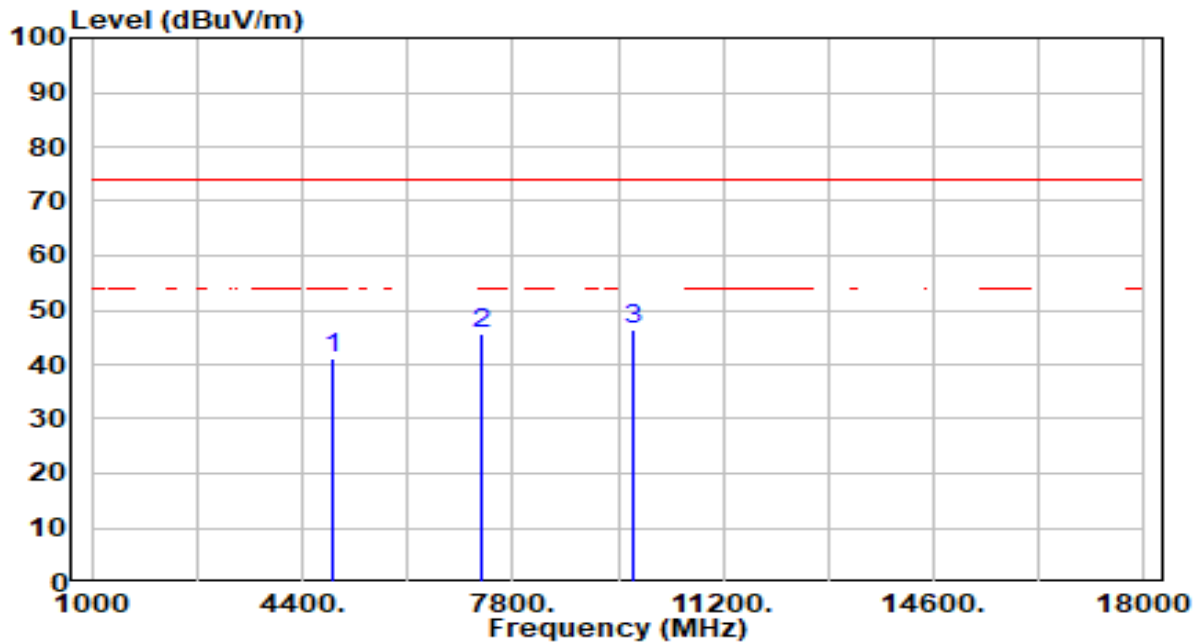


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.87	0.35	41.22	-32.78	74.00	200	8	Peak
2	7311.000	39.70	5.79	45.49	-28.51	74.00	200	122	Peak
3	* 9748.000	41.21	5.34	46.55	-27.45	74.00	200	98	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

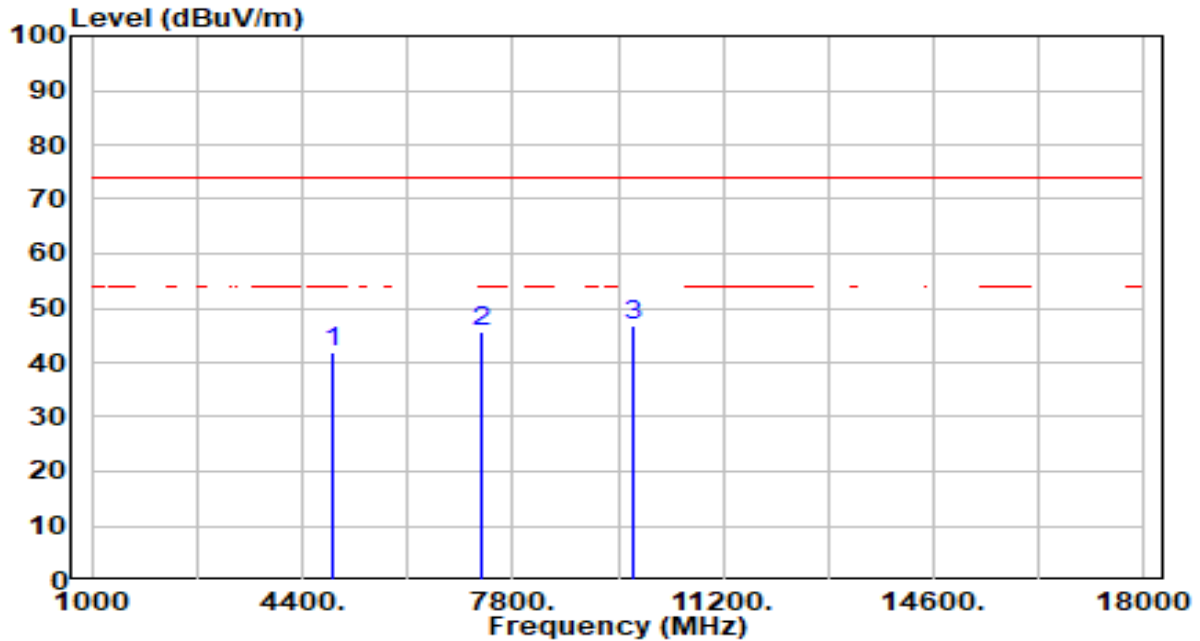


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.62	0.35	41.97	-32.03	74.00	200	1	Peak
2	7311.000	39.74	5.79	45.53	-28.47	74.00	200	5	Peak
3	* 9748.000	41.54	5.34	46.88	-27.12	74.00	200	247	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

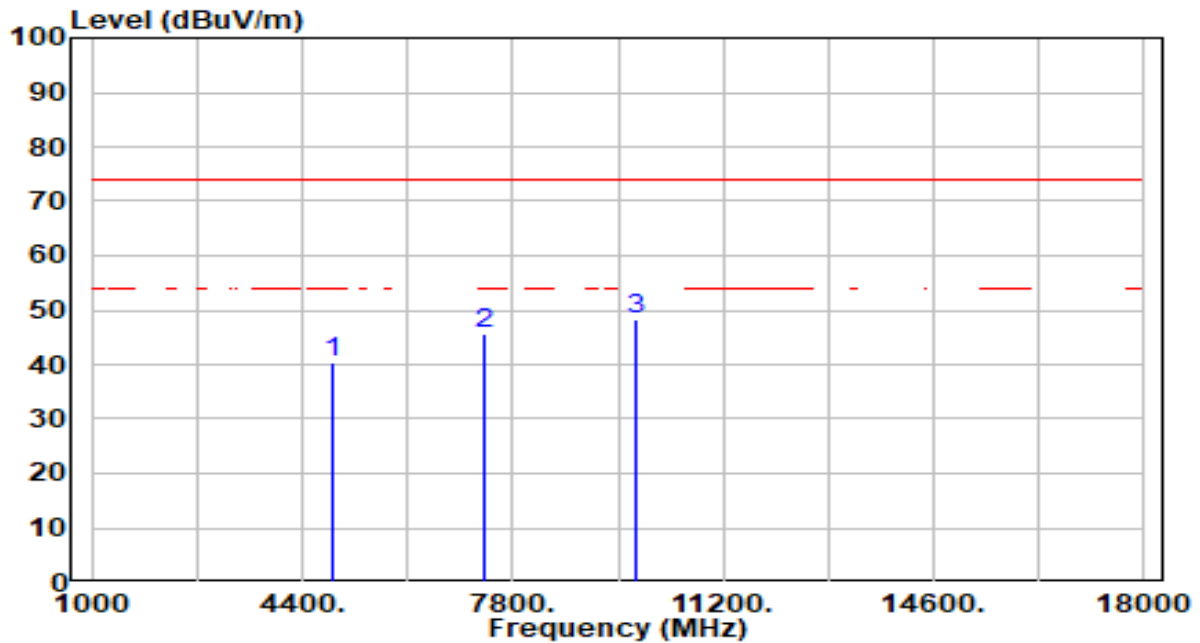


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.01	0.41	40.43	-33.57	74.00	200	218	Peak
2	7356.000	39.73	5.78	45.51	-28.49	74.00	200	140	Peak
3	* 9808.000	42.93	5.35	48.29	-25.71	74.00	200	272	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-16
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

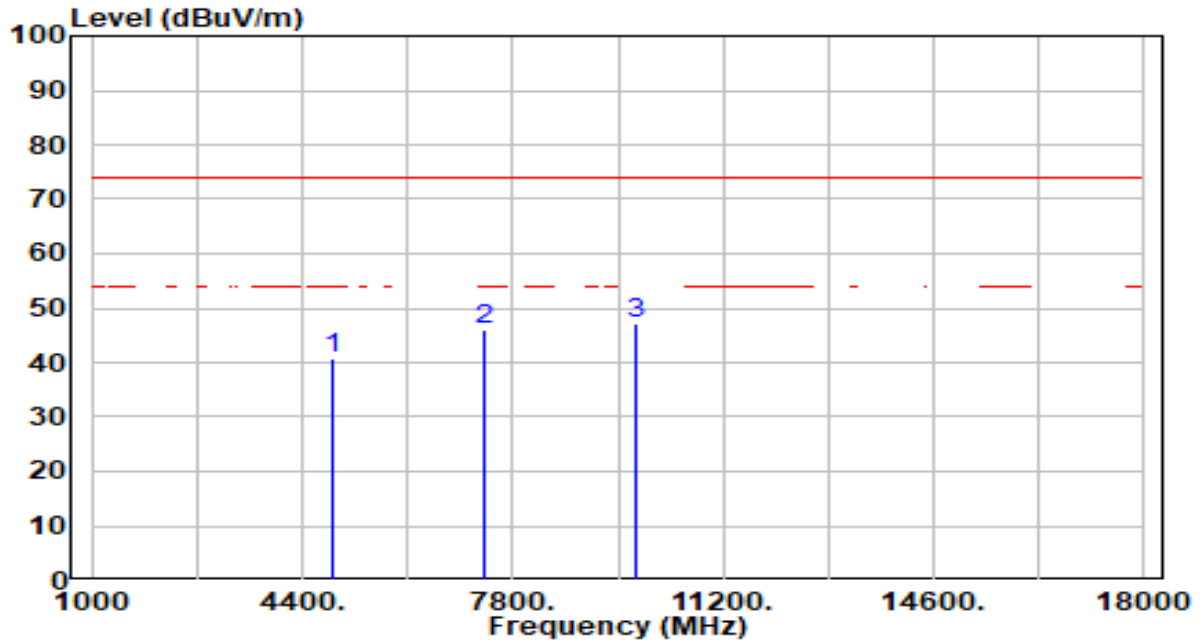

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.35	0.41	40.76	-33.24	74.00	200	32	Peak
2	7356.000	40.35	5.78	46.13	-27.87	74.00	200	80	Peak
3	* 9808.000	41.63	5.35	46.99	-27.01	74.00	200	233	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

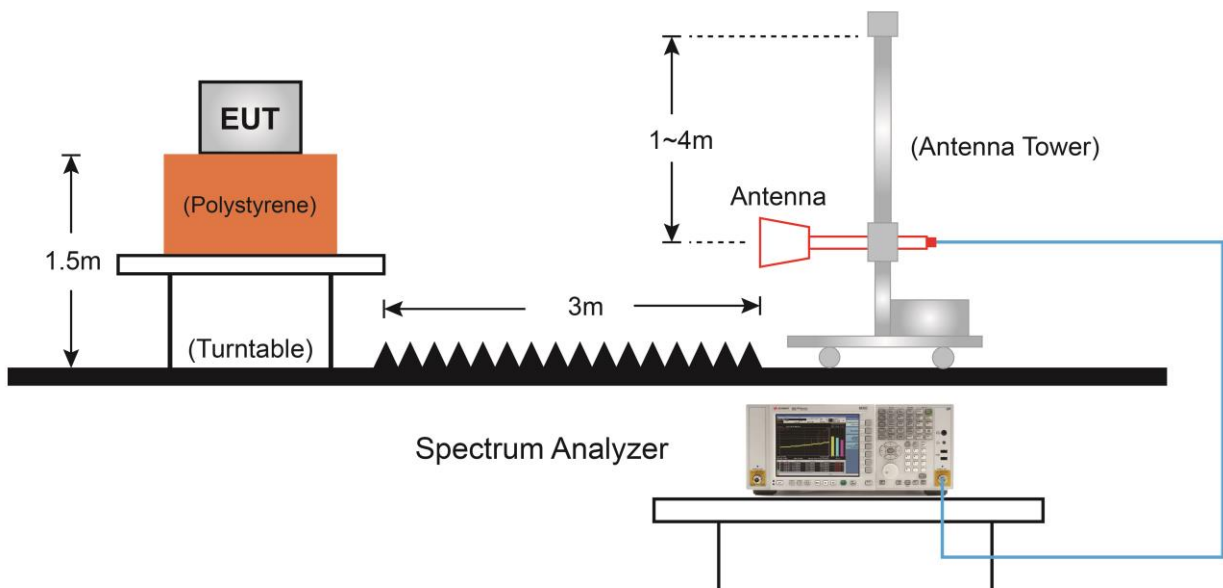

7.7.5. Test Result

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

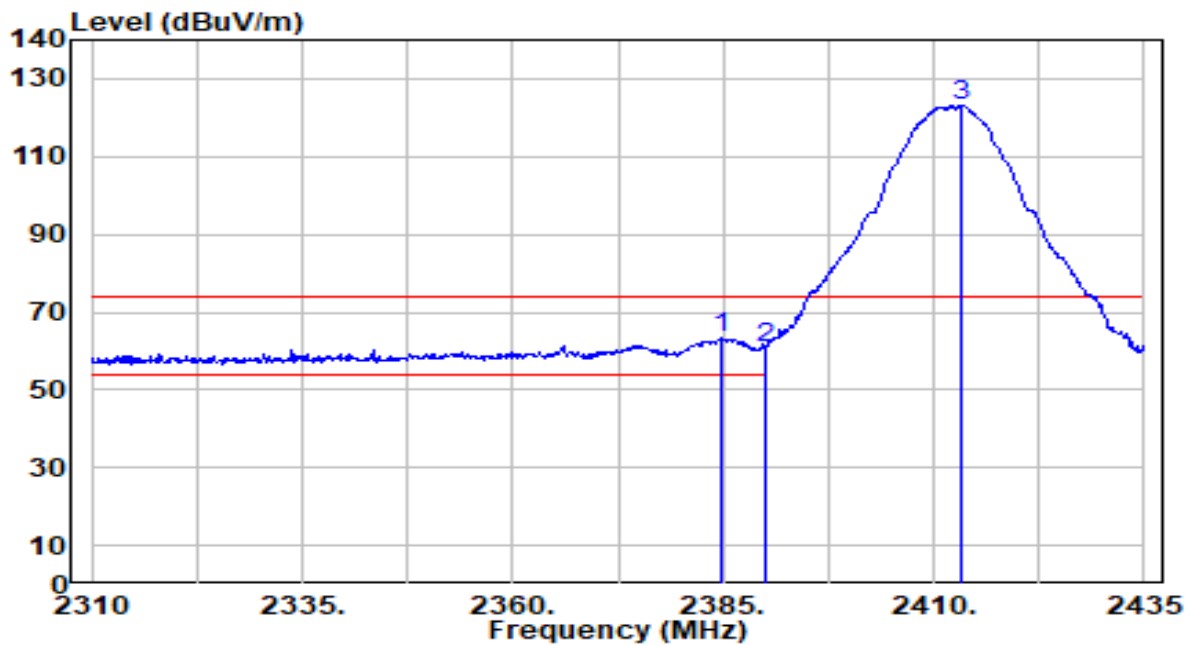


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.750	32.65	30.61	63.25	-10.75	74.00	200	106	Peak
2	2390.000	30.30	30.61	60.91	-13.09	74.00	200	106	Peak
3	2413.250	92.51	30.67	123.18	N/A	N/A	200	106	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

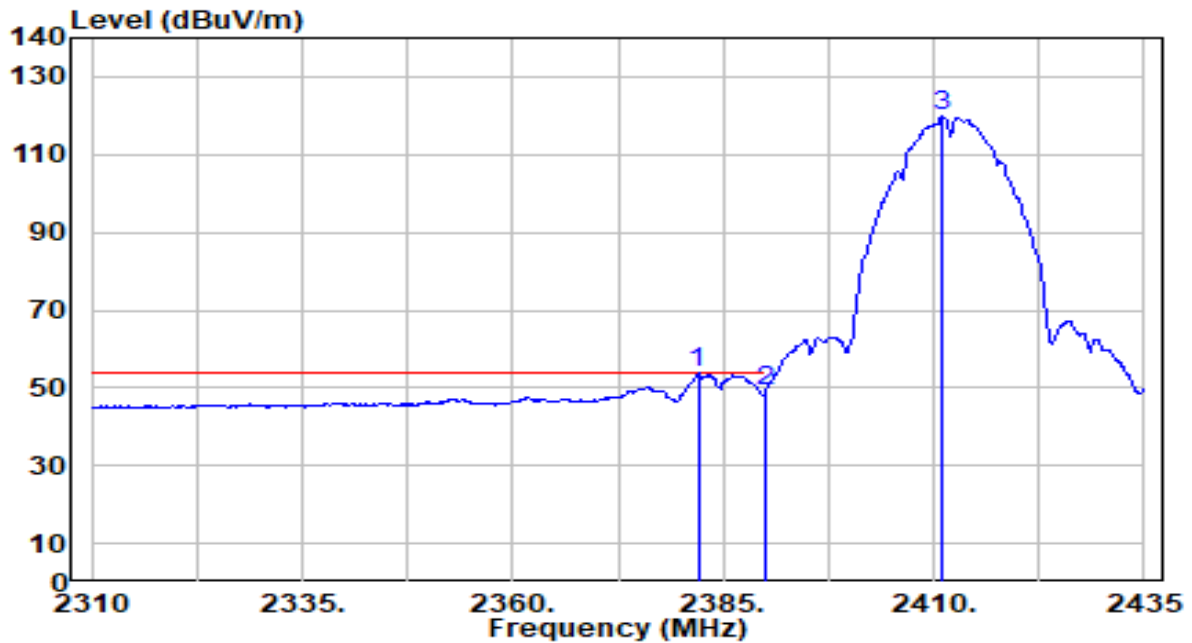


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2382.000	23.24	30.60	53.85	-0.15	54.00	200	106	Average
2	2390.000	18.37	30.61	48.99	-5.01	54.00	200	106	Average
3	2411.000	89.05	30.67	119.72	N/A	N/A	200	106	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

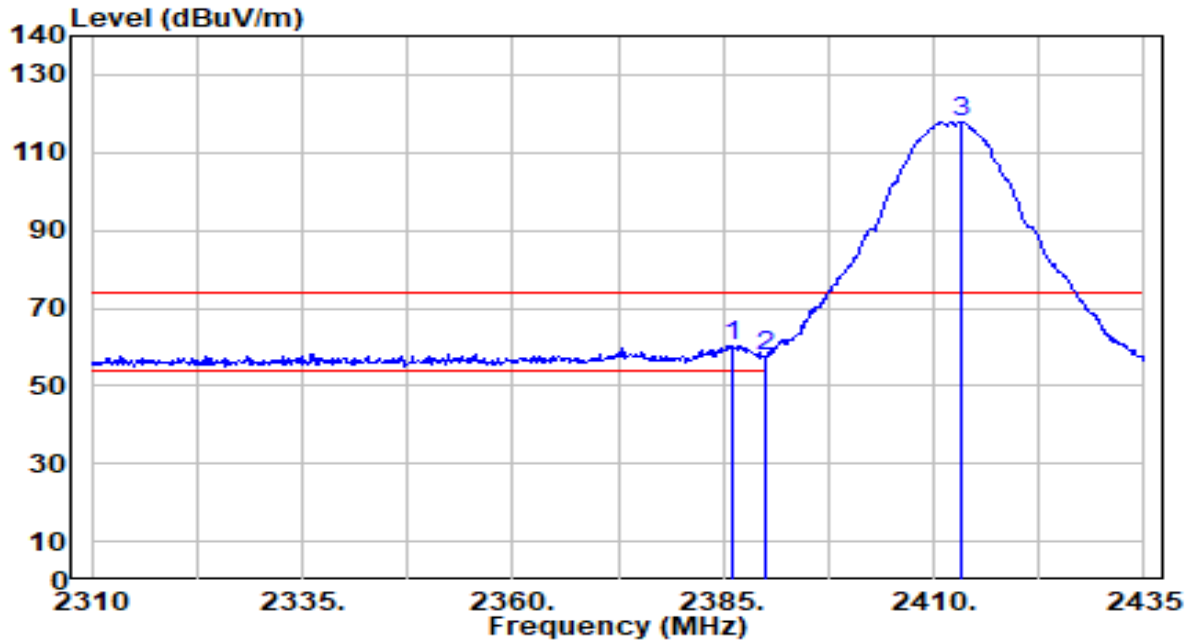


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.125	29.59	30.61	60.20	-13.80	74.00	300	174	Peak
2		2390.000	26.88	30.61	57.49	-16.51	74.00	300	174	Peak
3		2413.250	87.32	30.67	117.99	N/A	N/A	300	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

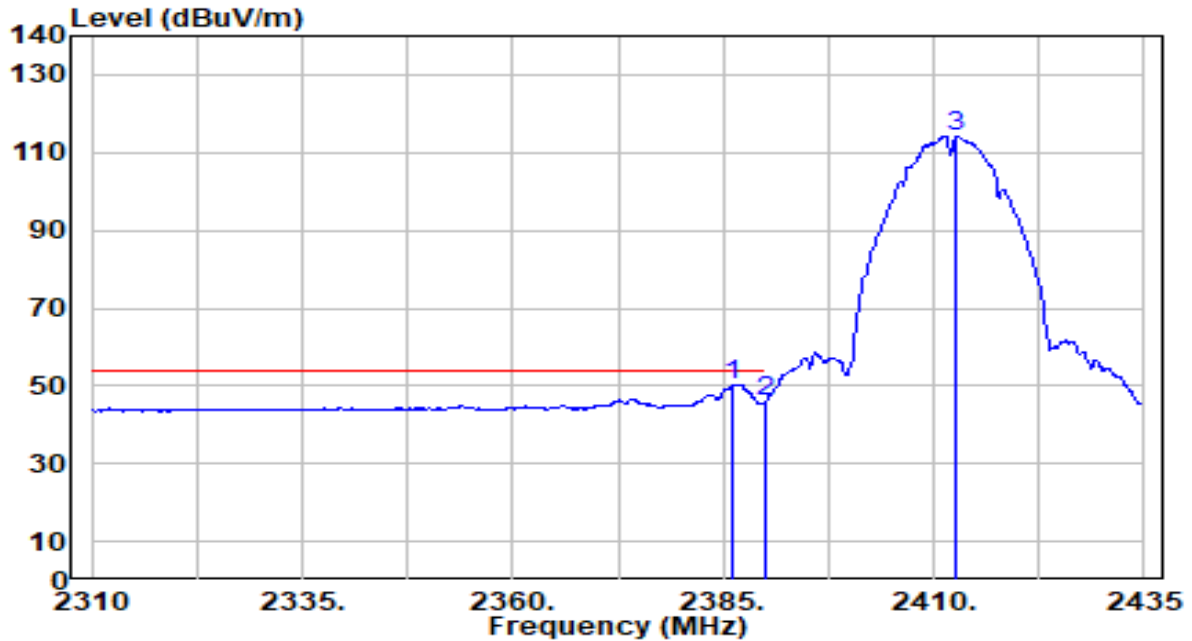


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.250	19.83	30.61	50.44	-3.56	54.00	300	174	Average
2		2390.000	15.17	30.61	45.79	-8.21	54.00	300	174	Average
3		2412.750	83.68	30.67	114.35	N/A	N/A	300	174	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

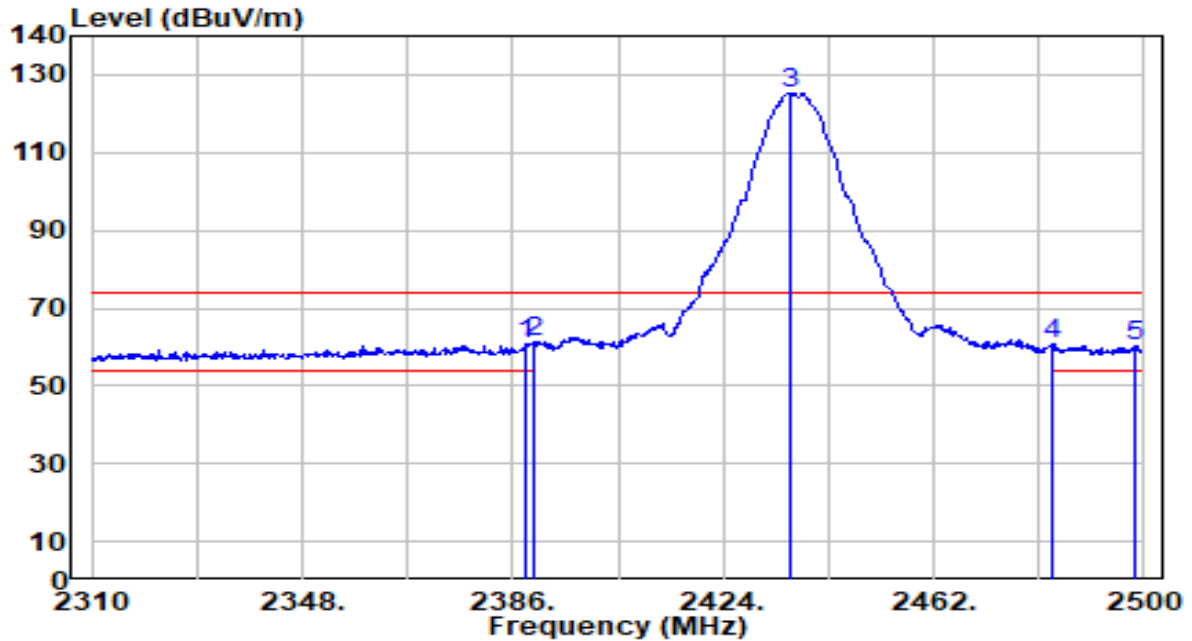


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	30.37	30.61	60.98	-13.02	74.00	200	106	Peak
2	* 2390.000	30.68	30.61	61.29	-12.71	74.00	200	106	Peak
3	2435.970	94.54	30.75	125.29	N/A	N/A	200	106	Peak
4	2483.500	29.62	30.91	60.54	-13.46	74.00	200	106	Peak
5	2498.480	29.33	30.96	60.30	-13.70	74.00	200	106	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

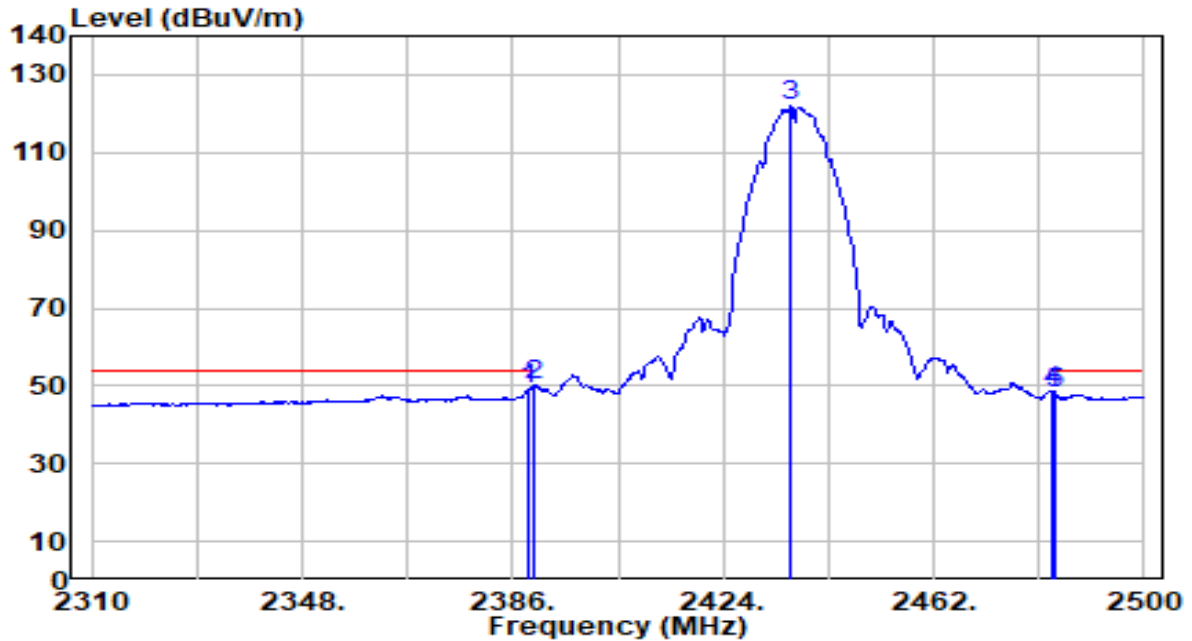


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	18.50	30.61	49.11	-4.89	54.00	200	106	Average
2	* 2390.000	19.42	30.61	50.03	-3.97	54.00	200	106	Average
3	2436.160	91.10	30.75	121.85	N/A	N/A	200	106	Average
4	2483.500	17.75	30.91	48.66	-5.34	54.00	200	106	Average
5	2484.040	17.04	30.92	47.95	-6.05	54.00	200	106	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

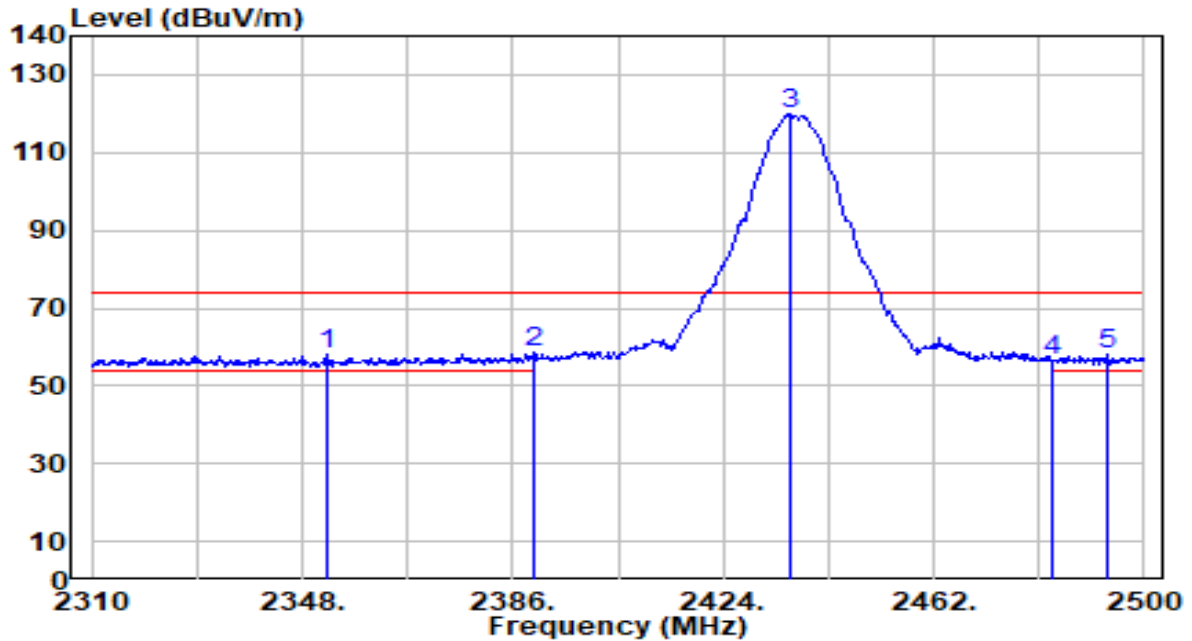


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2352.560	27.73	30.56	58.29	-15.71	74.00	300	174	Peak
2	* 2390.000	28.03	30.61	58.64	-15.36	74.00	300	174	Peak
3	2435.970	88.96	30.75	119.71	N/A	N/A	300	174	Peak
4	2483.500	25.56	30.91	56.48	-17.52	74.00	300	174	Peak
5	2493.540	27.29	30.95	58.23	-15.77	74.00	300	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

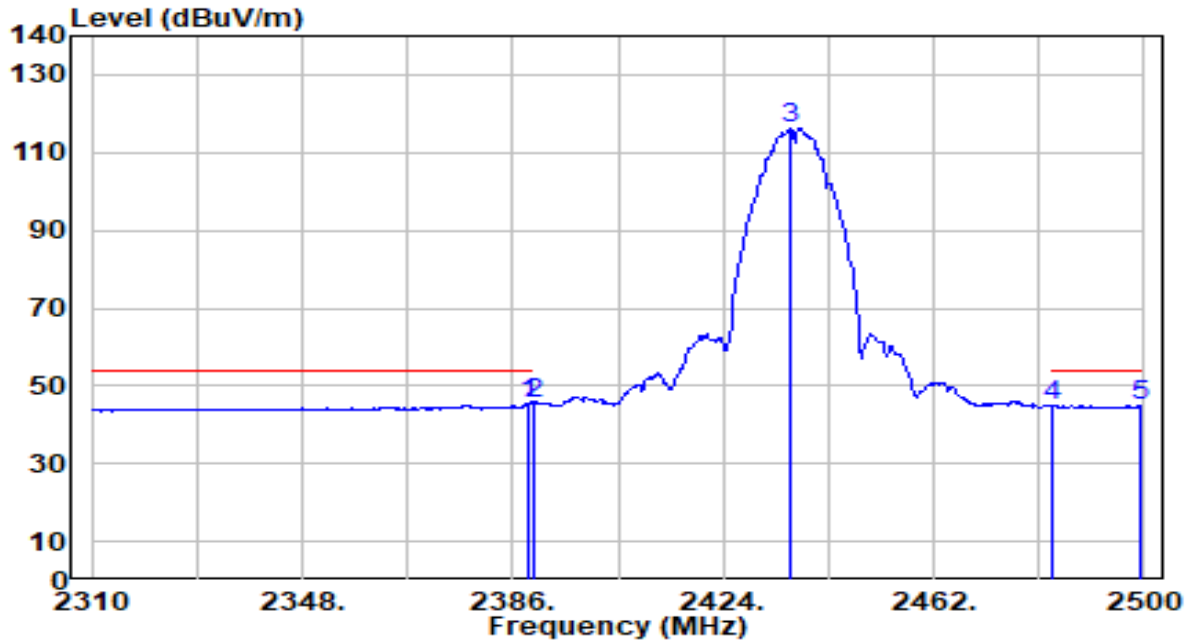


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	14.74	30.61	45.35	-8.65	54.00	300	174	Average
2	* 2390.000	15.08	30.61	45.69	-8.31	54.00	300	174	Average
3	2436.160	85.50	30.75	116.25	N/A	N/A	300	174	Average
4	2483.500	14.15	30.91	45.06	-8.94	54.00	300	174	Average
5	2499.240	13.87	30.97	44.83	-9.17	54.00	300	174	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

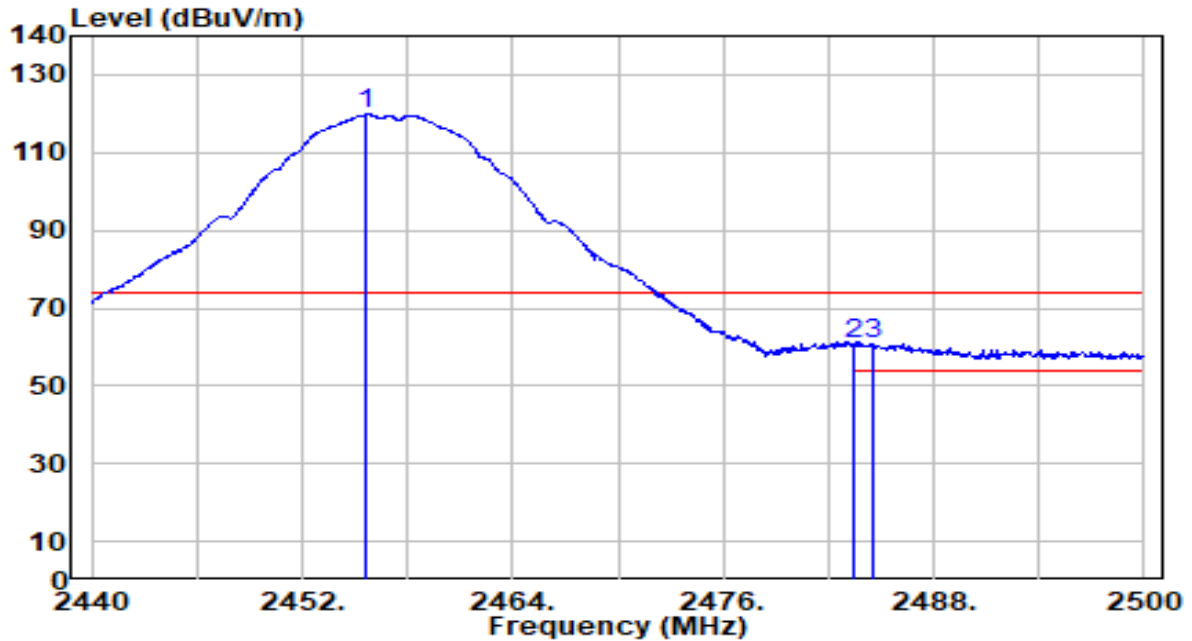


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.660	88.87	30.82	119.68	N/A	N/A	300	140	Peak
2	2483.500	29.58	30.91	60.49	-13.51	74.00	300	140	Peak
3	* 2484.520	29.68	30.92	60.60	-13.40	74.00	300	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

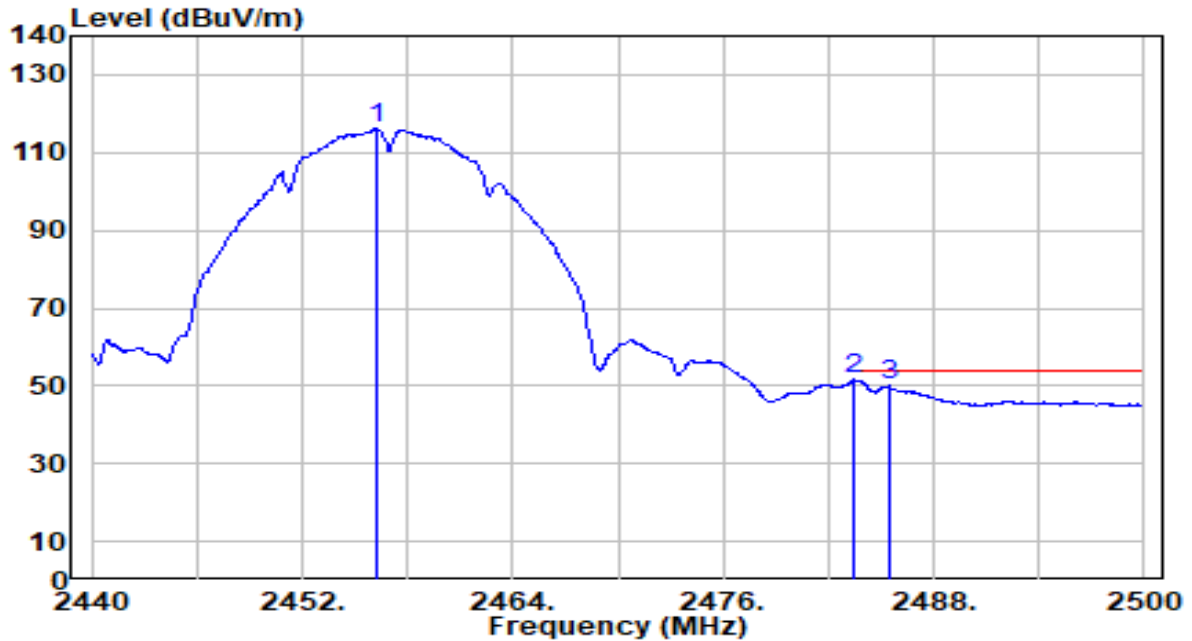


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.260	85.22	30.82	116.04	N/A	N/A	300	140	Average
2	* 2483.500	20.61	30.91	51.53	-2.47	54.00	300	140	Average
3	2485.420	19.06	30.92	49.98	-4.02	54.00	300	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

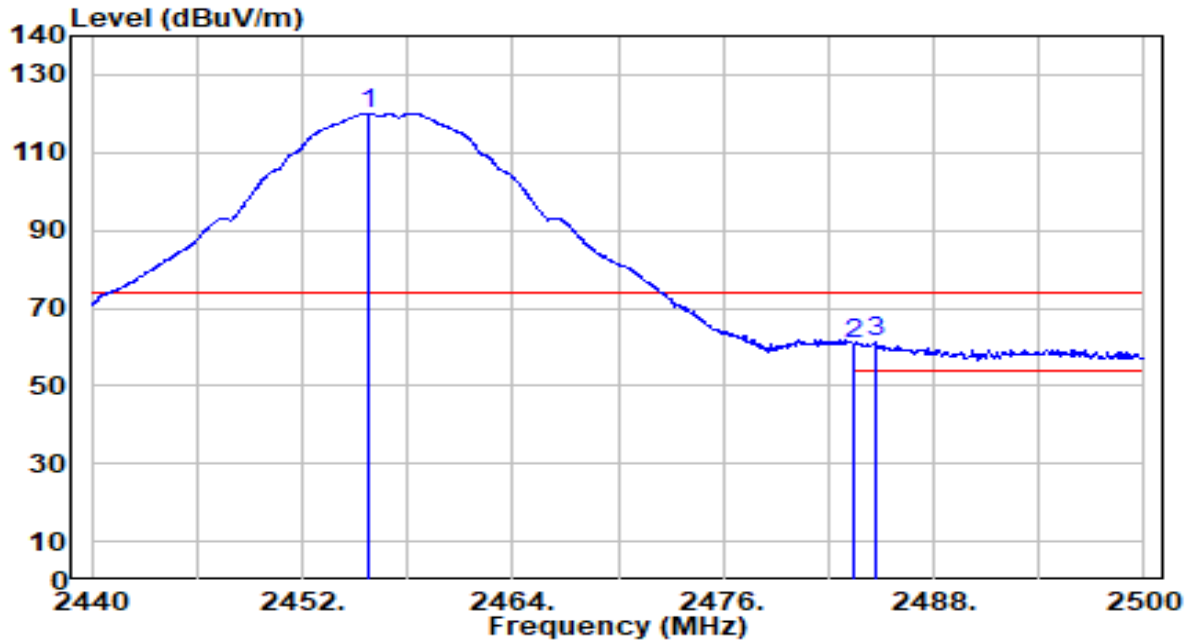


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.780	89.30	30.82	120.12	N/A	N/A	290	133	Peak
2	2483.500	29.83	30.91	60.74	-13.26	74.00	290	133	Peak
3	* 2484.640	30.16	30.92	61.08	-12.92	74.00	290	133	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

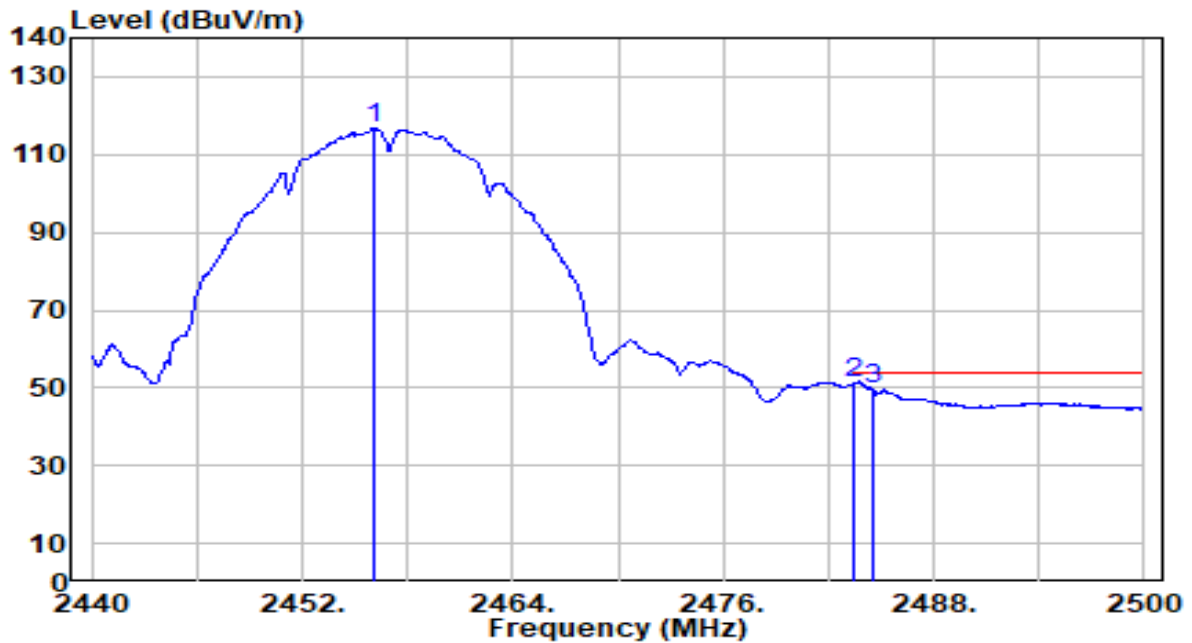


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.020	85.99	30.82	116.81	N/A	N/A	290	133	Average
2	* 2483.500	20.26	30.91	51.17	-2.83	54.00	290	133	Average
3	2484.520	18.58	30.92	49.49	-4.51	54.00	290	133	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

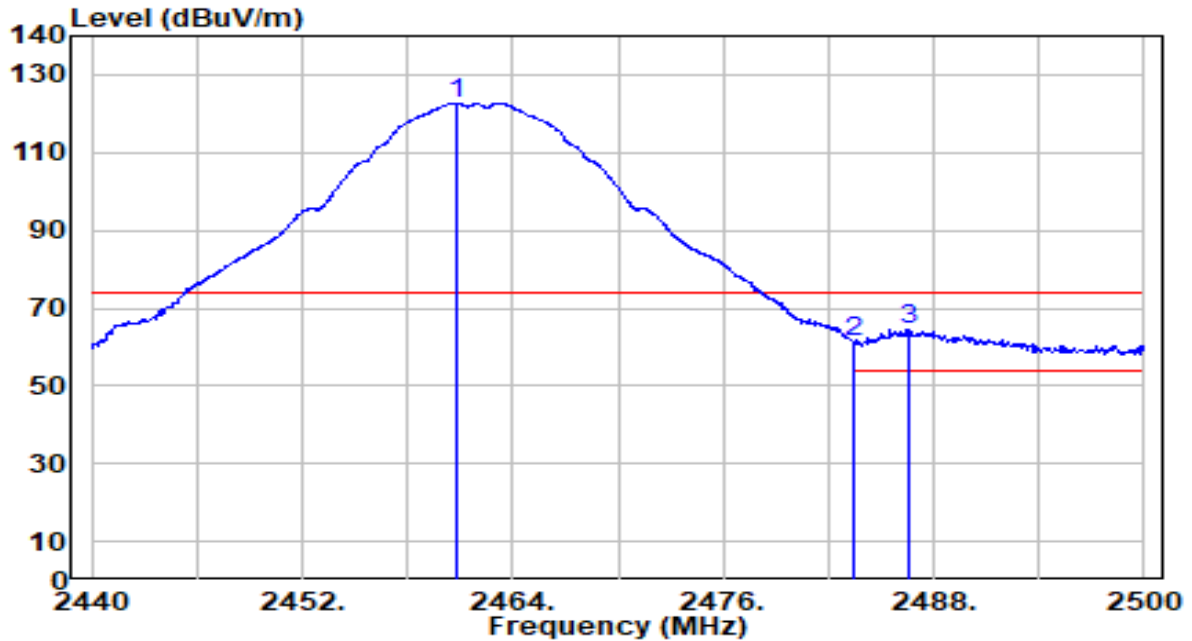


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	91.85	30.84	122.69	N/A	N/A	200	106	Peak
2	2483.500	30.34	30.91	61.26	-12.74	74.00	200	106	Peak
3	* 2486.560	33.62	30.92	64.54	-9.46	74.00	200	106	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

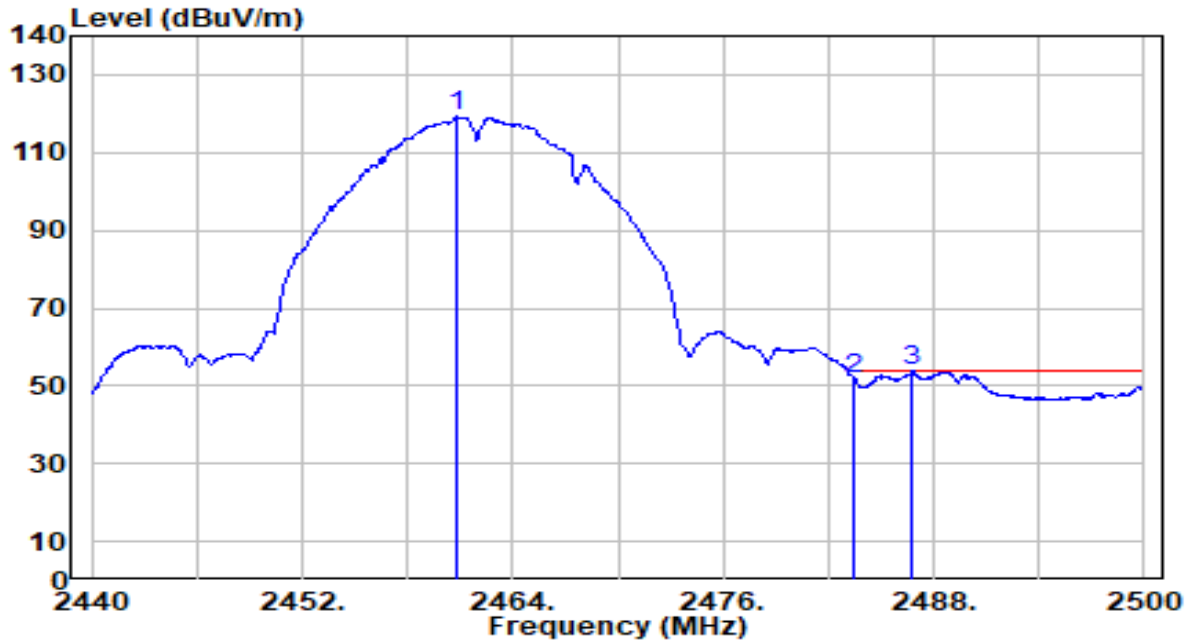


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	88.41	30.84	119.25	N/A	N/A	200	106	Average
2	2483.500	20.94	30.91	51.86	-2.14	54.00	200	106	Average
3	* 2486.800	22.94	30.92	53.86	-0.14	54.00	200	106	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

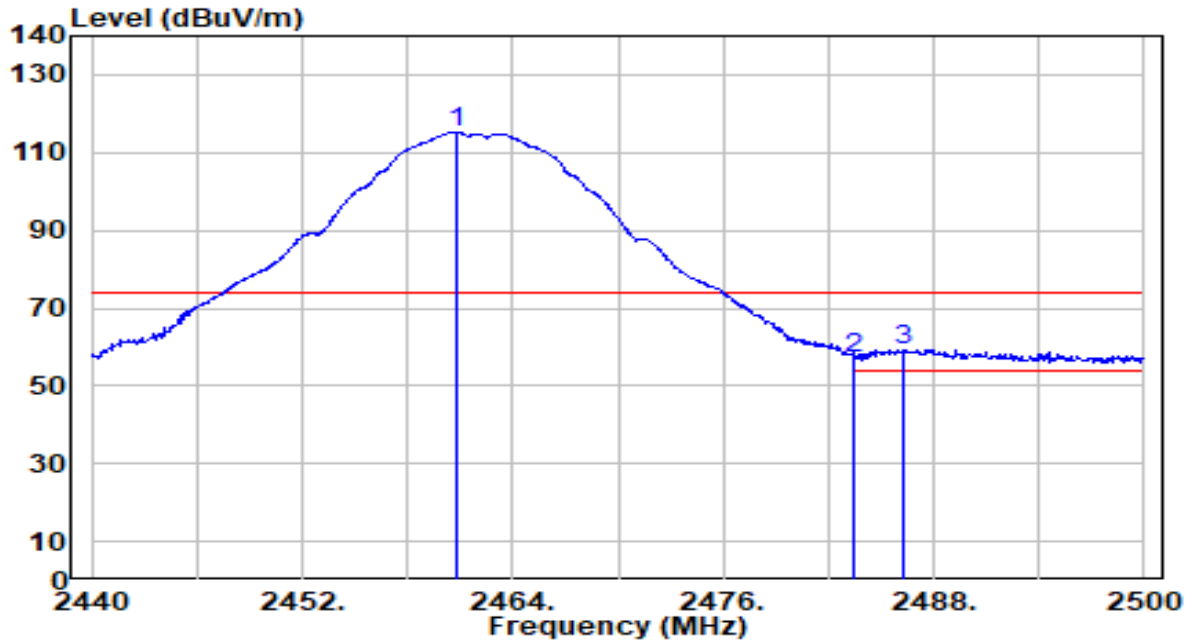


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	84.38	30.84	115.22	N/A	N/A	300	174	Peak
2	2483.500	26.38	30.91	57.29	-16.71	74.00	300	174	Peak
3	* 2486.200	28.39	30.92	59.31	-14.69	74.00	300	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

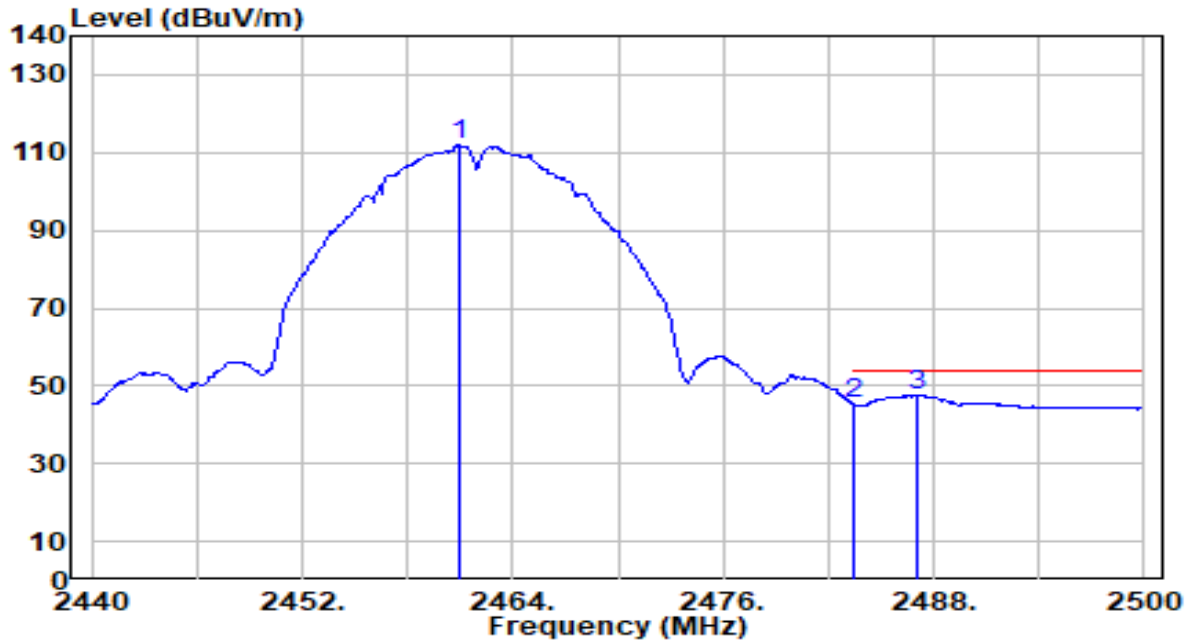


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	81.19	30.84	112.03	N/A	N/A	300	174	Average
2	2483.500	14.28	30.91	45.20	-8.80	54.00	300	174	Average
3	* 2487.100	16.83	30.93	47.75	-6.25	54.00	300	174	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

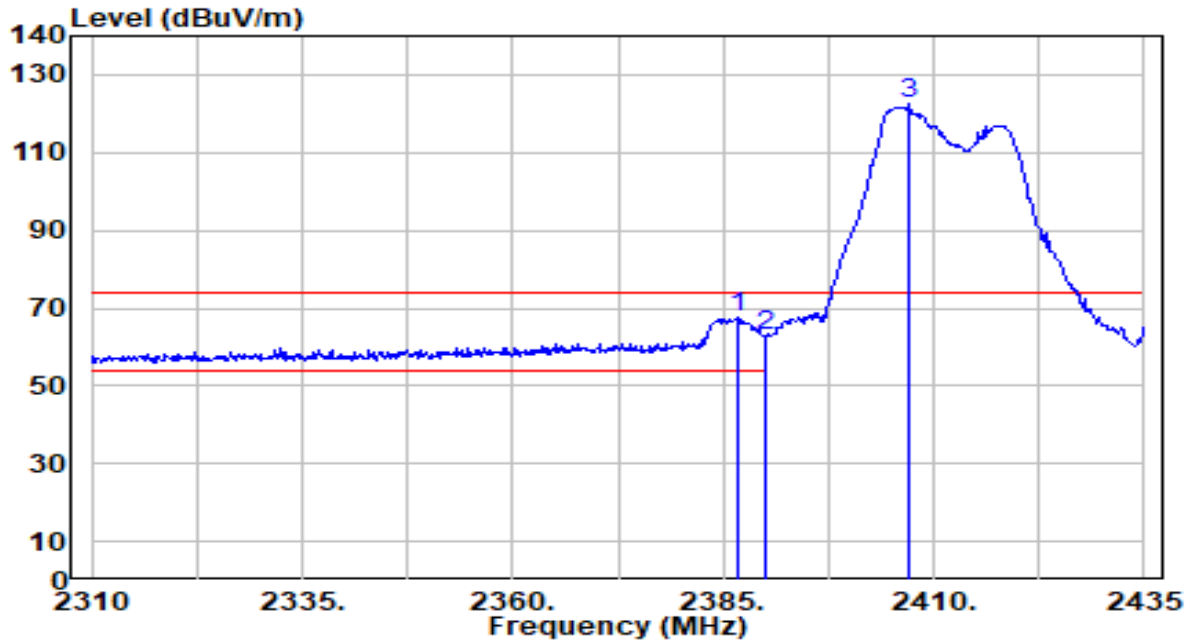


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2386.750	36.78	30.61	67.39	-6.61	74.00	163	119	Peak
2	2390.000	32.17	30.61	62.78	-11.22	74.00	163	119	Peak
3	2407.125	91.72	30.65	122.37	N/A	N/A	163	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

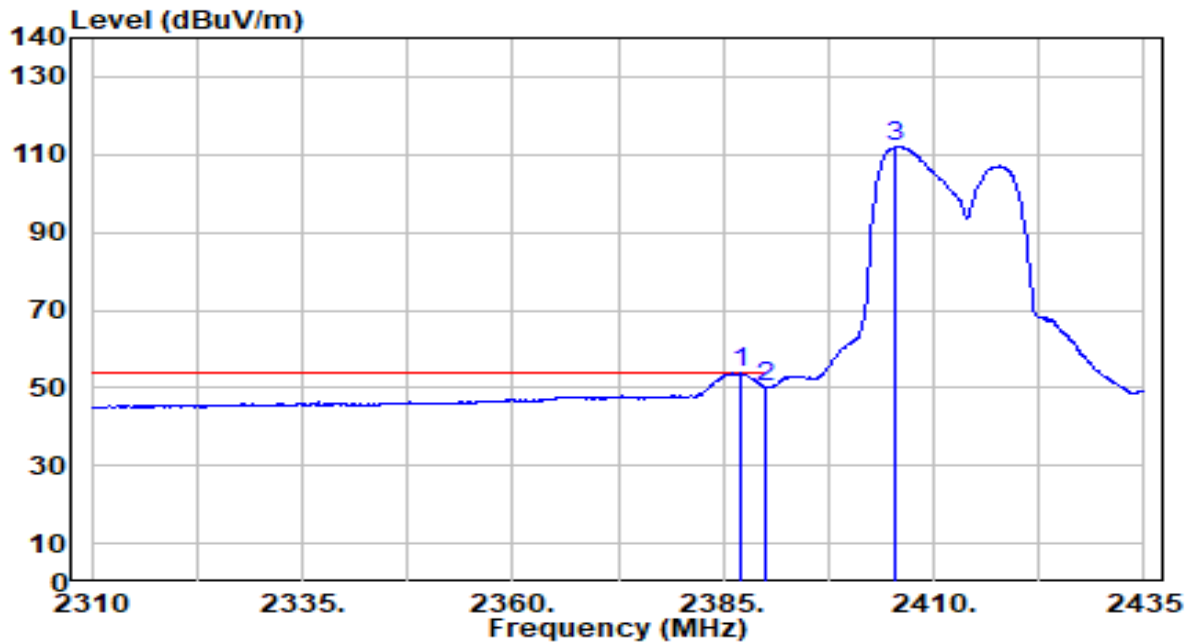


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.24	30.61	53.85	-0.15	54.00	163	119	Average
2		19.39	30.61	50.00	-4.00	54.00	163	119	Average
3		81.38	30.65	112.03	N/A	N/A	163	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

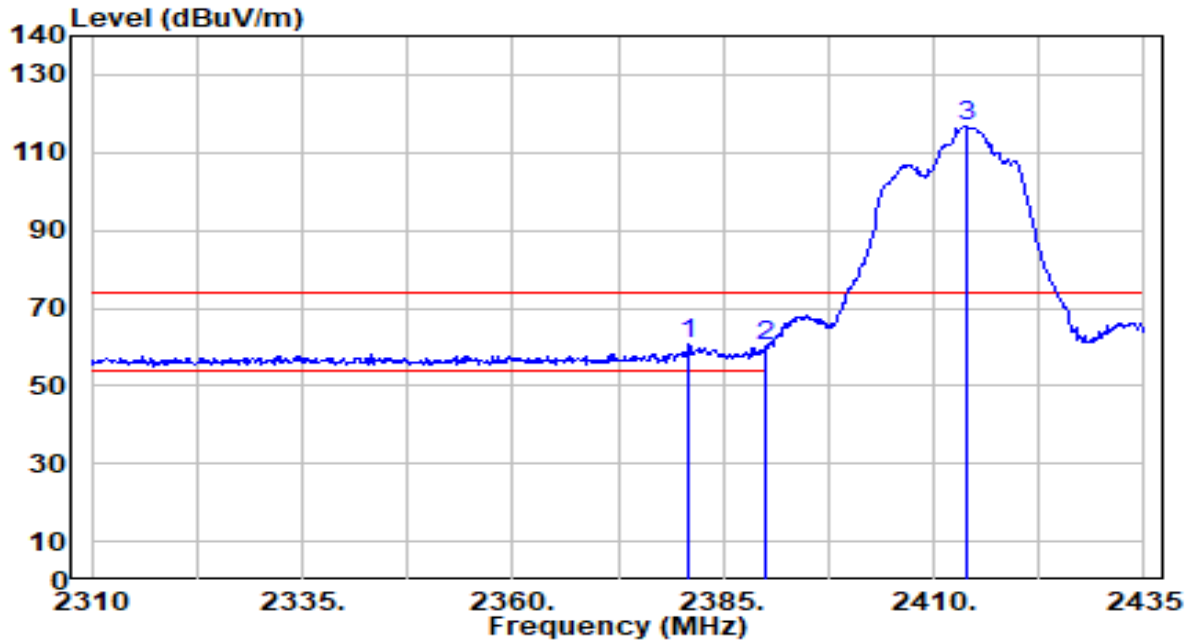


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2381.000	30.10	30.60	60.70	-13.30	74.00	300	142	Peak
2		2390.000	29.35	30.61	59.97	-14.03	74.00	300	142	Peak
3		2413.875	86.01	30.68	116.68	N/A	N/A	300	142	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

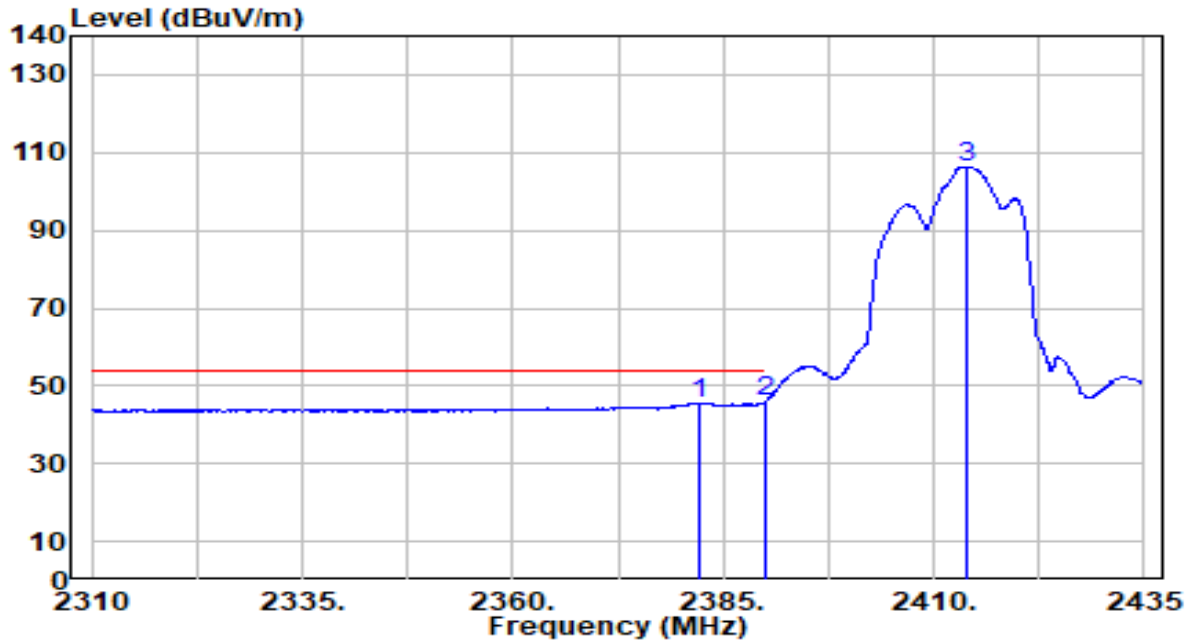


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.250	15.00	30.60	45.60	-8.40	54.00	300	142	Average
2	* 2390.000	15.49	30.61	46.11	-7.89	54.00	300	142	Average
3	2414.000	75.76	30.68	106.43	N/A	N/A	300	142	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 2_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

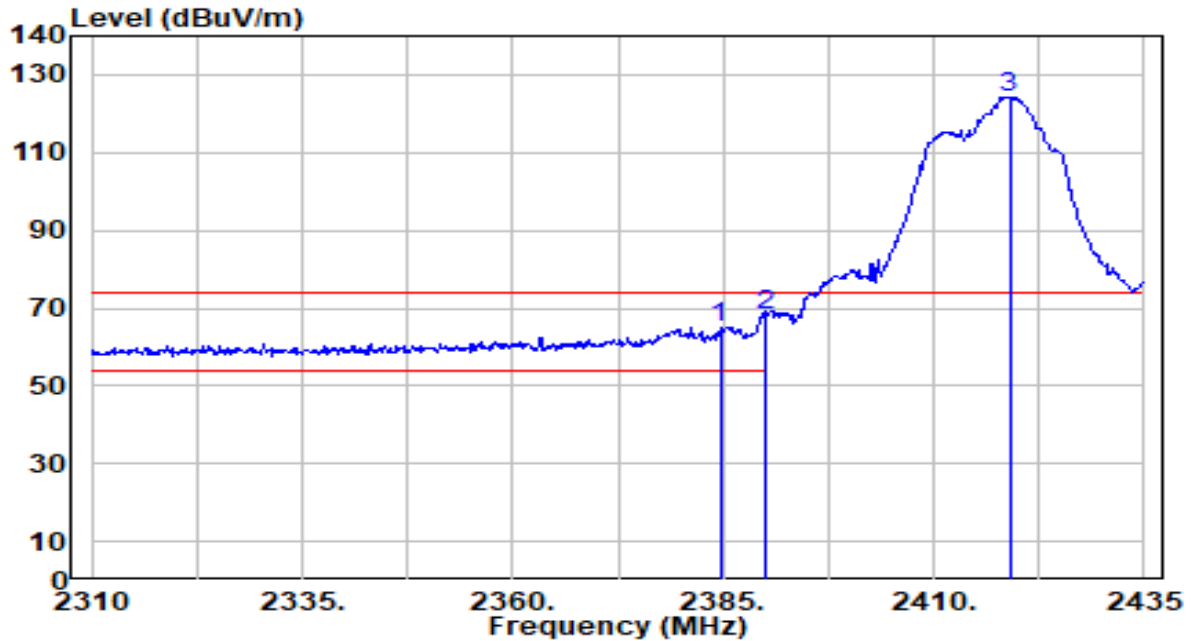


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.625	34.54	30.61	65.15	-8.85	74.00	236	116	Peak
2	* 2390.000	37.69	30.61	68.30	-5.70	74.00	236	116	Peak
3	2419.000	93.54	30.69	124.23	N/A	N/A	236	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 2_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

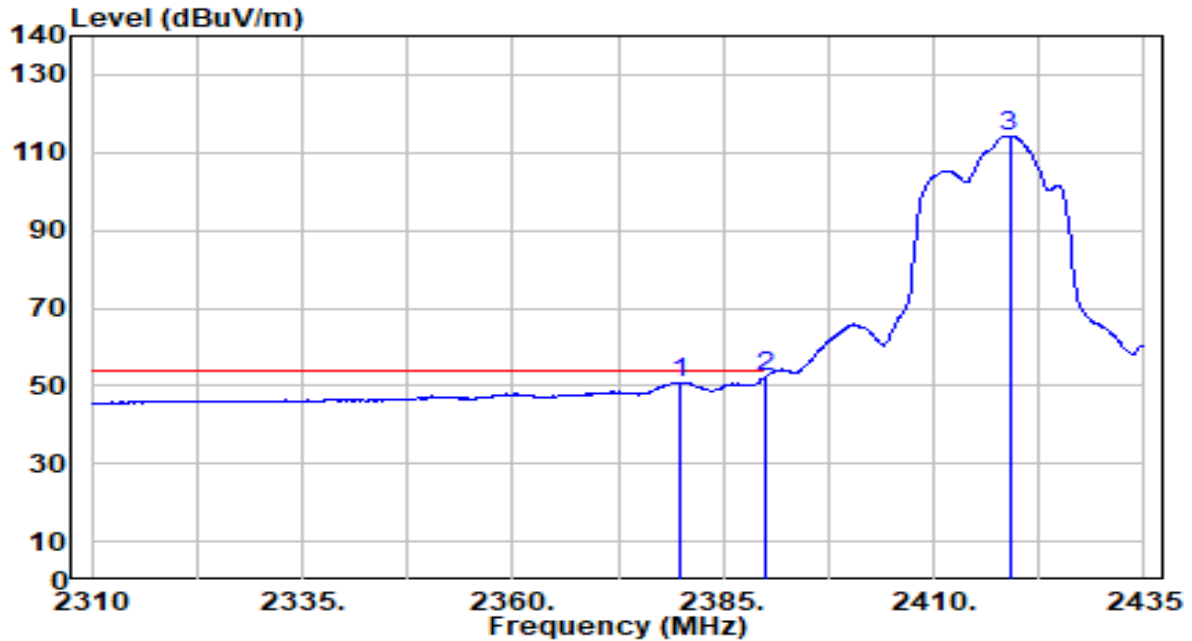


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2379.750	20.29	30.60	50.89	-3.11	54.00	236	116	Average
2	* 2390.000	21.81	30.61	52.42	-1.58	54.00	236	116	Average
3	2419.000	83.59	30.69	114.28	N/A	N/A	236	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 2_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

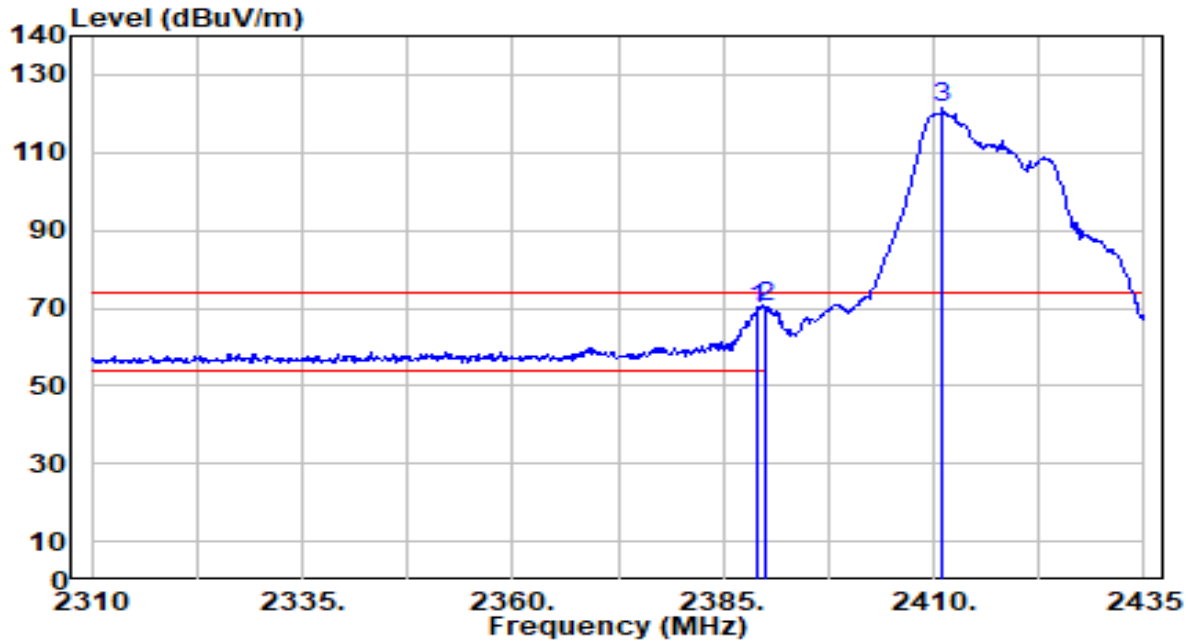


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	39.06	30.61	69.67	-4.33	74.00	237	138	Peak
2	* 2390.000	39.81	30.61	70.43	-3.57	74.00	237	138	Peak
3	2411.125	90.96	30.67	121.63	N/A	N/A	237	138	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 2_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

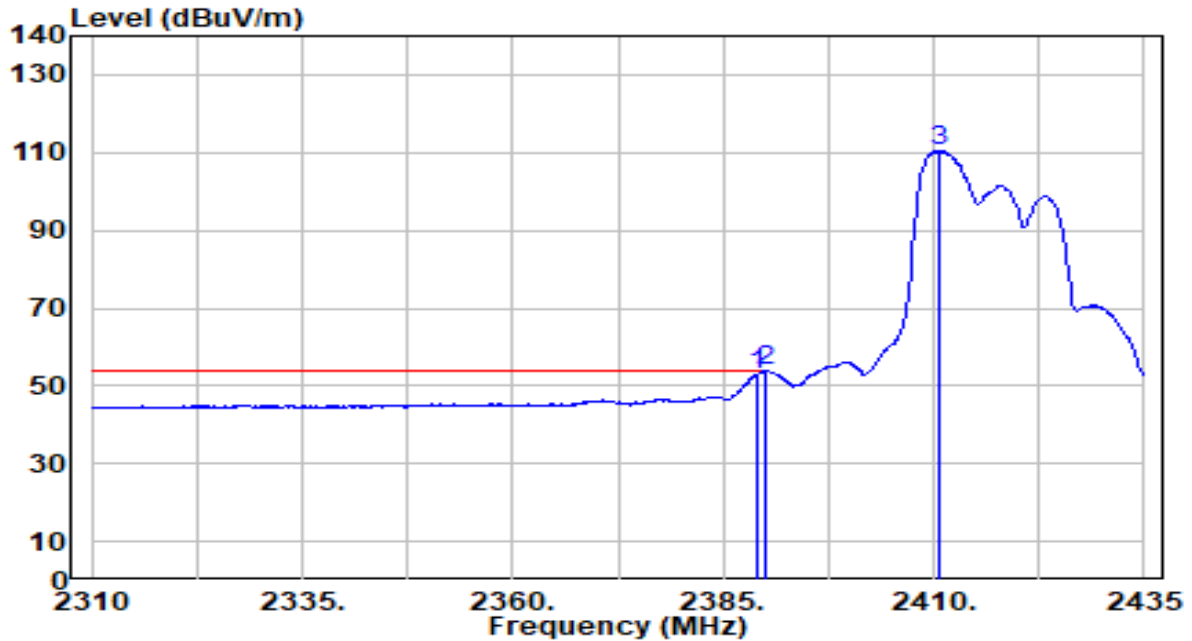


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	22.25	30.61	52.86	-1.14	54.00	237	138	Average
2	* 2390.000	23.32	30.61	53.93	-0.07	54.00	237	138	Average
3	2410.500	79.58	30.66	110.24	N/A	N/A	237	138	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

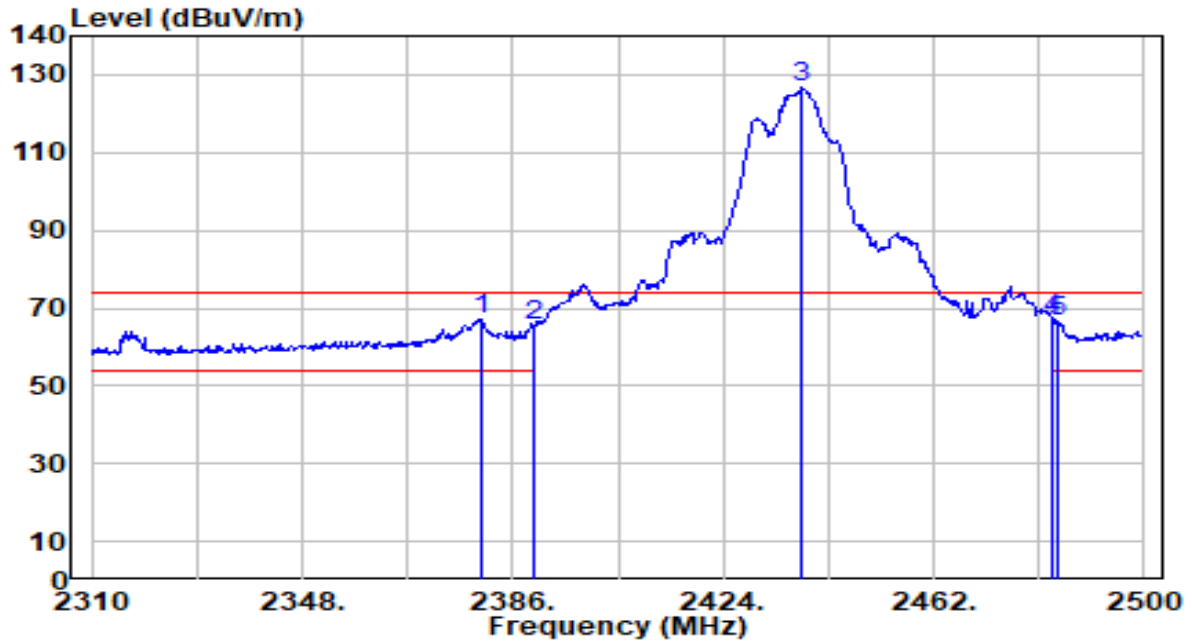


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2380.490	36.49	30.60	67.09	-6.91	74.00	217	106	Peak
2	2390.000	34.85	30.61	65.46	-8.54	74.00	217	106	Peak
3	2438.250	95.91	30.76	126.66	N/A	N/A	217	106	Peak
4	* 2483.500	36.44	30.91	67.35	-6.65	74.00	217	106	Peak
5	2484.230	35.75	30.92	66.67	-7.33	74.00	217	106	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

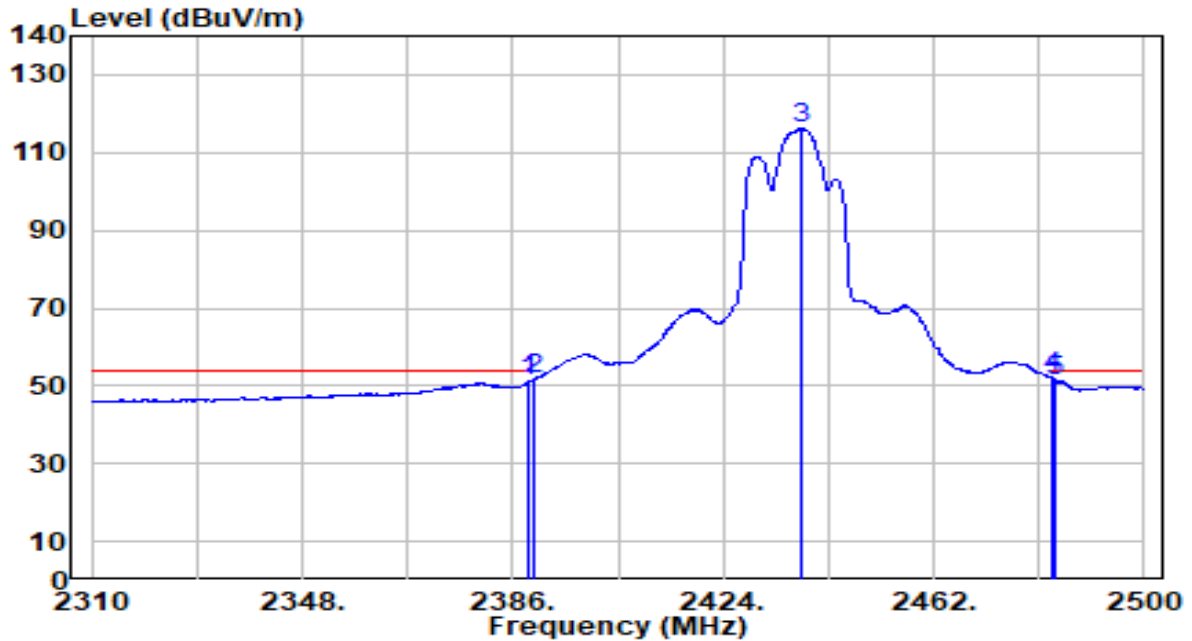


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	20.43	30.61	51.04	-2.96	54.00	217	106	Average
2	2390.000	20.94	30.61	51.55	-2.45	54.00	217	106	Average
3	2438.060	85.60	30.76	116.36	N/A	N/A	217	106	Average
4	* 2483.500	21.16	30.91	52.08	-1.92	54.00	217	106	Average
5	2484.040	20.44	30.92	51.35	-2.65	54.00	217	106	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

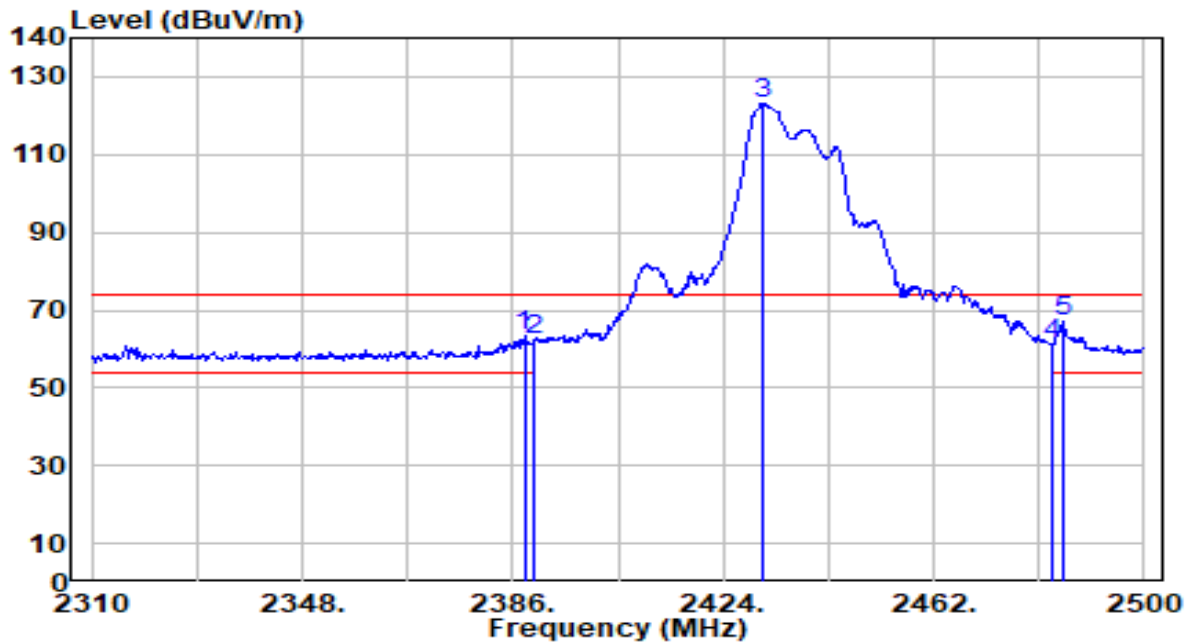


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.090	33.02	30.61	63.63	-10.37	74.00	266	143	Peak
2	2390.000	31.90	30.61	62.51	-11.49	74.00	266	143	Peak
3	2431.030	92.42	30.73	123.15	N/A	N/A	266	143	Peak
4	2483.500	30.40	30.91	61.31	-12.69	74.00	266	143	Peak
5	* 2485.180	36.23	30.92	67.15	-6.85	74.00	266	143	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

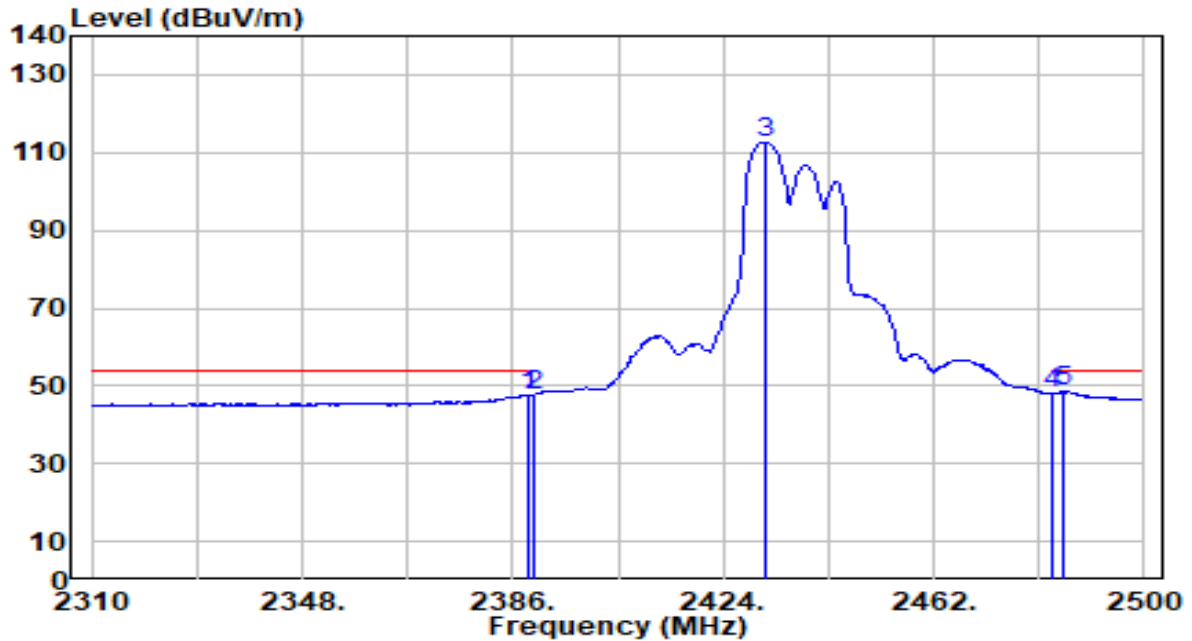


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	16.97	30.61	47.59	-6.41	54.00	266	143	Average
2	2390.000	17.18	30.61	47.79	-6.21	54.00	266	143	Average
3	2431.790	82.00	30.74	112.74	N/A	N/A	266	143	Average
4	2483.500	17.07	30.91	47.98	-6.02	54.00	266	143	Average
5	* 2485.180	17.57	30.92	48.49	-5.51	54.00	266	143	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

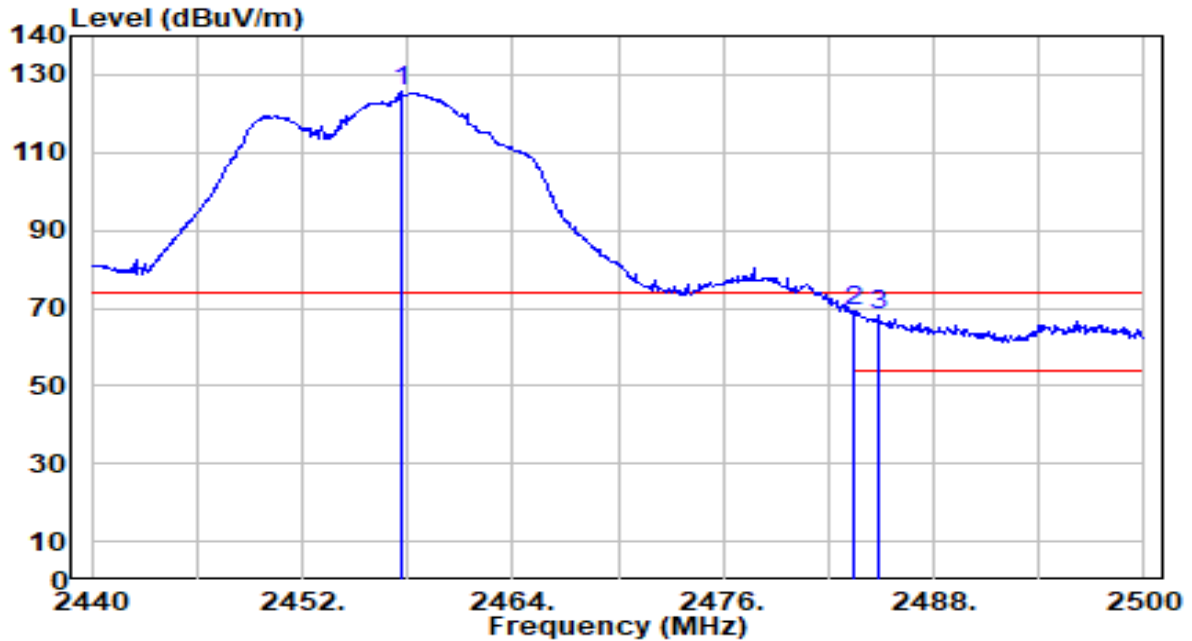


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.700	94.70	30.83	125.53	N/A	N/A	214	114	Peak
2	* 2483.500	38.33	30.91	69.24	-4.76	74.00	214	114	Peak
3	2484.820	37.36	30.92	68.28	-5.72	74.00	214	114	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

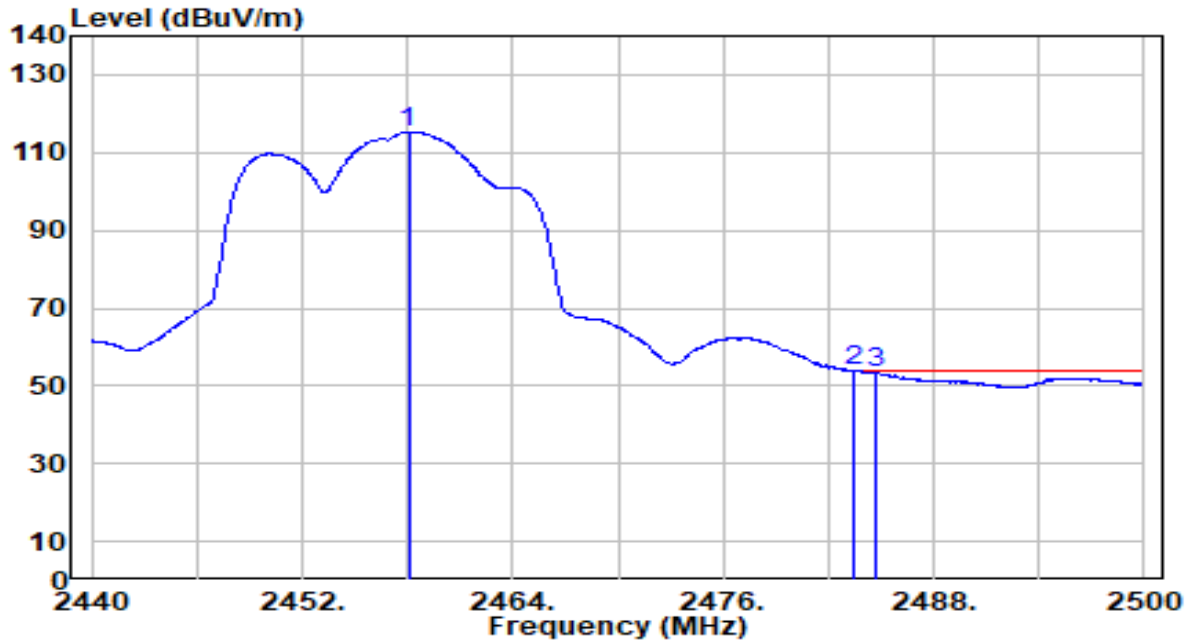


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.060	84.56	30.83	115.39	N/A	N/A	214	114	Average
2	* 2483.500	22.97	30.91	53.88	-0.12	54.00	214	114	Average
3	2484.700	22.45	30.92	53.37	-0.63	54.00	214	114	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

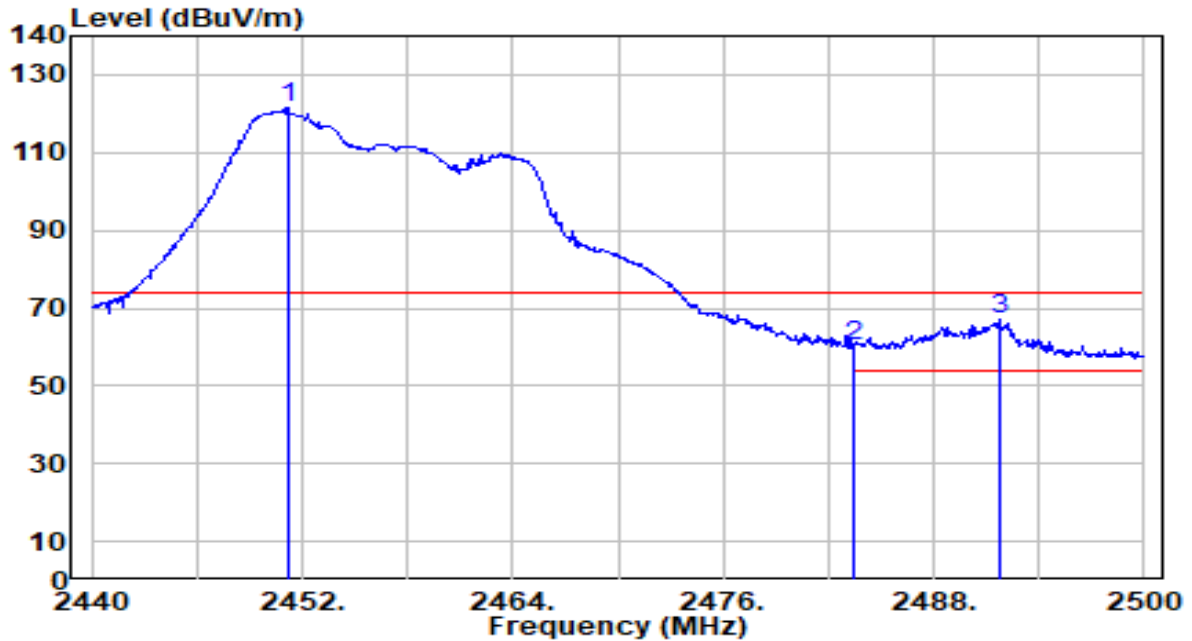


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.160	90.93	30.80	121.73	N/A	N/A	236	139	Peak
2	2483.500	29.38	30.91	60.29	-13.71	74.00	236	139	Peak
3	* 2491.780	36.22	30.94	67.16	-6.84	74.00	236	139	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

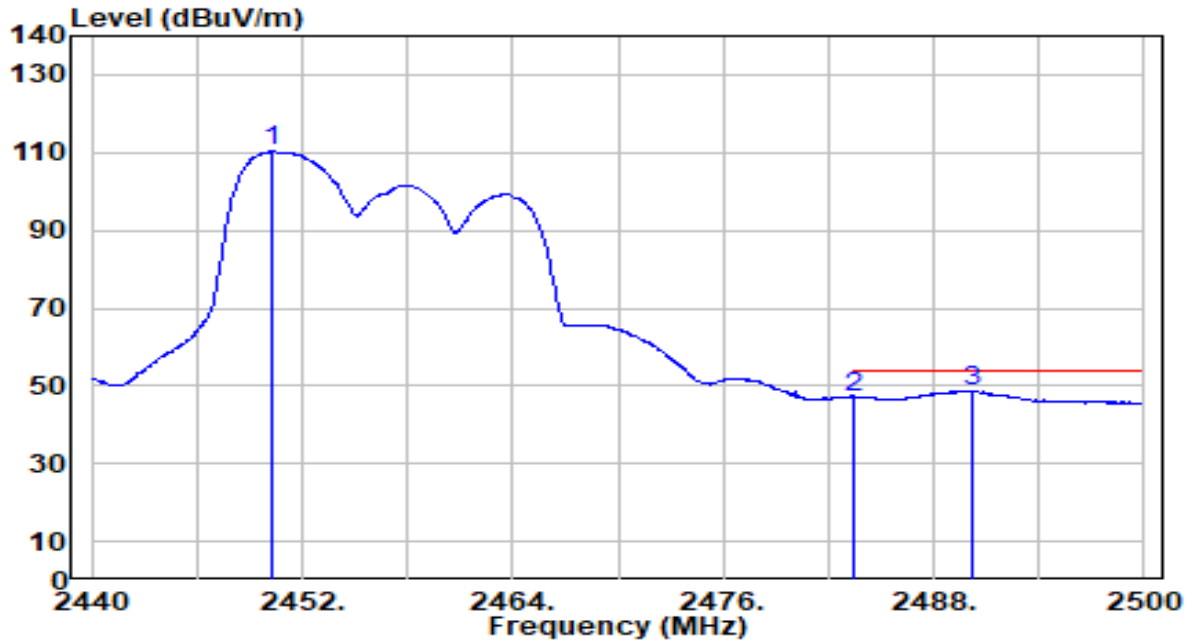


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.320	79.45	30.80	110.25	N/A	N/A	236	139	Average
2	2483.500	16.21	30.91	47.12	-6.88	54.00	236	139	Average
3	* 2490.160	17.69	30.94	48.63	-5.37	54.00	236	139	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

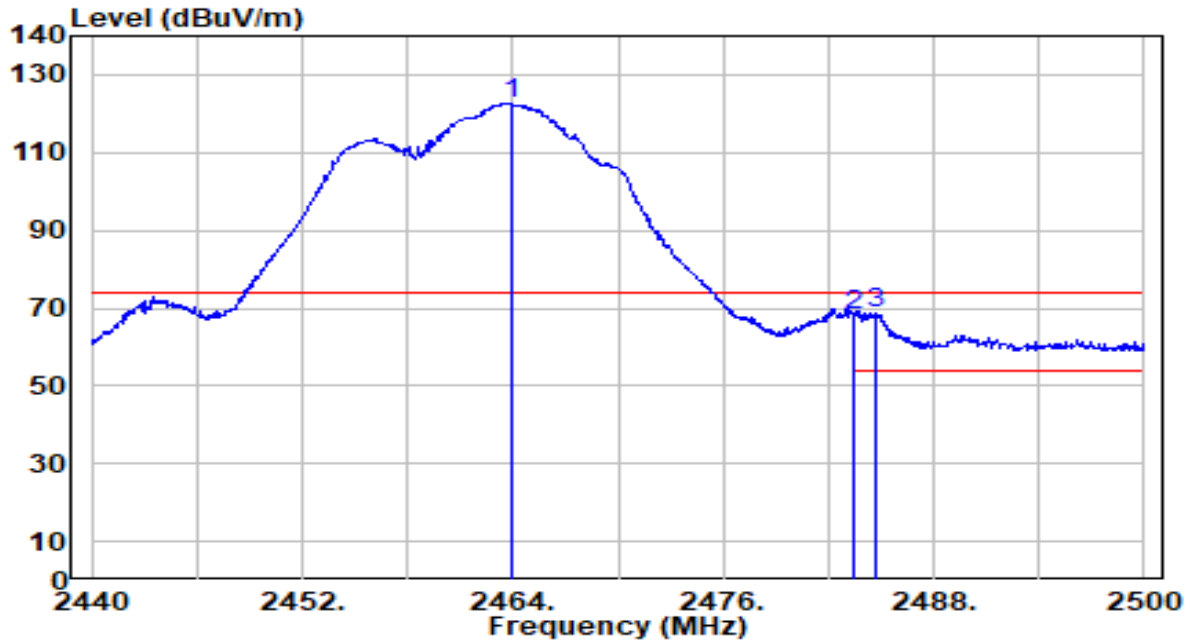


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.000	91.57	30.85	122.42	N/A	N/A	230	118	Peak
2	2483.500	37.27	30.91	68.19	-5.81	74.00	230	118	Peak
3	* 2484.700	37.51	30.92	68.43	-5.57	74.00	230	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

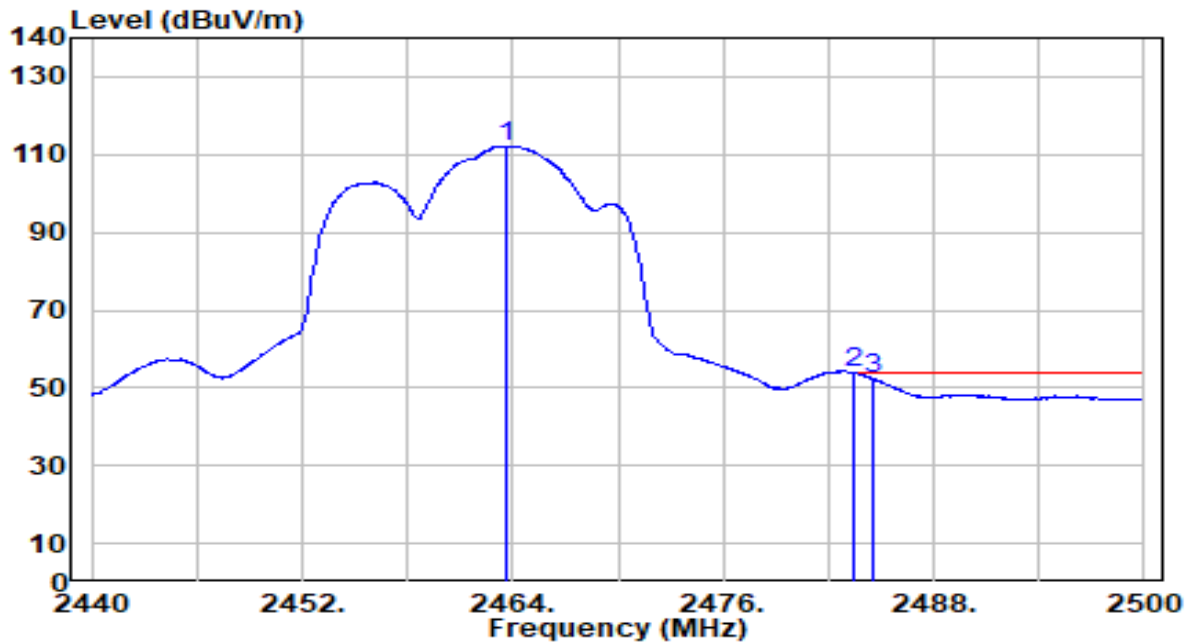


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.640	81.26	30.85	112.10	N/A	N/A	230	118	Average
2	* 2483.500	22.99	30.91	53.90	-0.10	54.00	230	118	Average
3	2484.520	21.47	30.92	52.39	-1.61	54.00	230	118	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

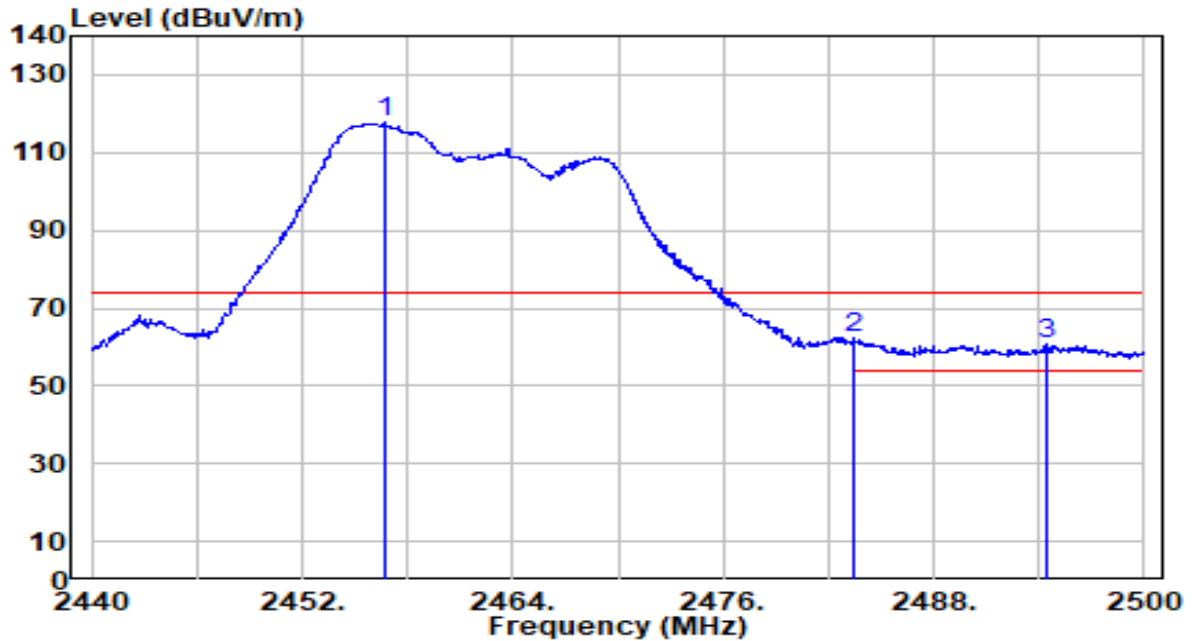


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.740	86.76	30.82	117.58	N/A	N/A	236	143	Peak
2	* 2483.500	31.64	30.91	62.55	-11.45	74.00	236	143	Peak
3	2494.480	29.92	30.95	60.88	-13.12	74.00	236	143	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

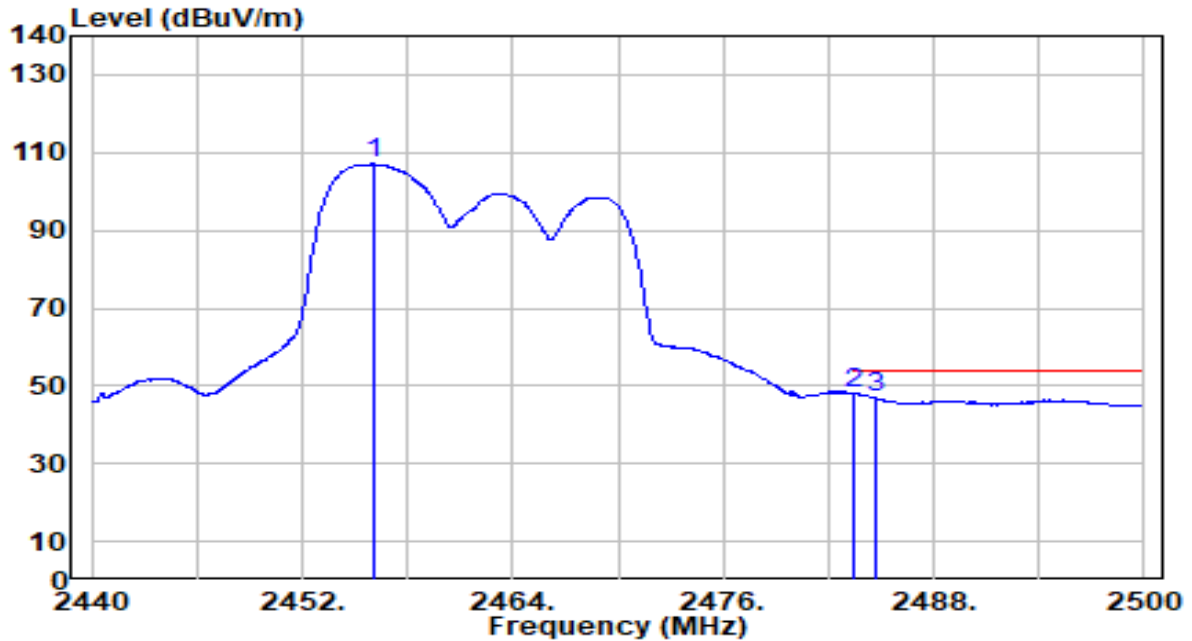


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.140	76.17	30.82	106.99	N/A	N/A	236	143	Average
2	* 2483.500	17.29	30.91	48.21	-5.79	54.00	236	143	Average
3	2484.640	16.02	30.92	46.93	-7.07	54.00	236	143	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

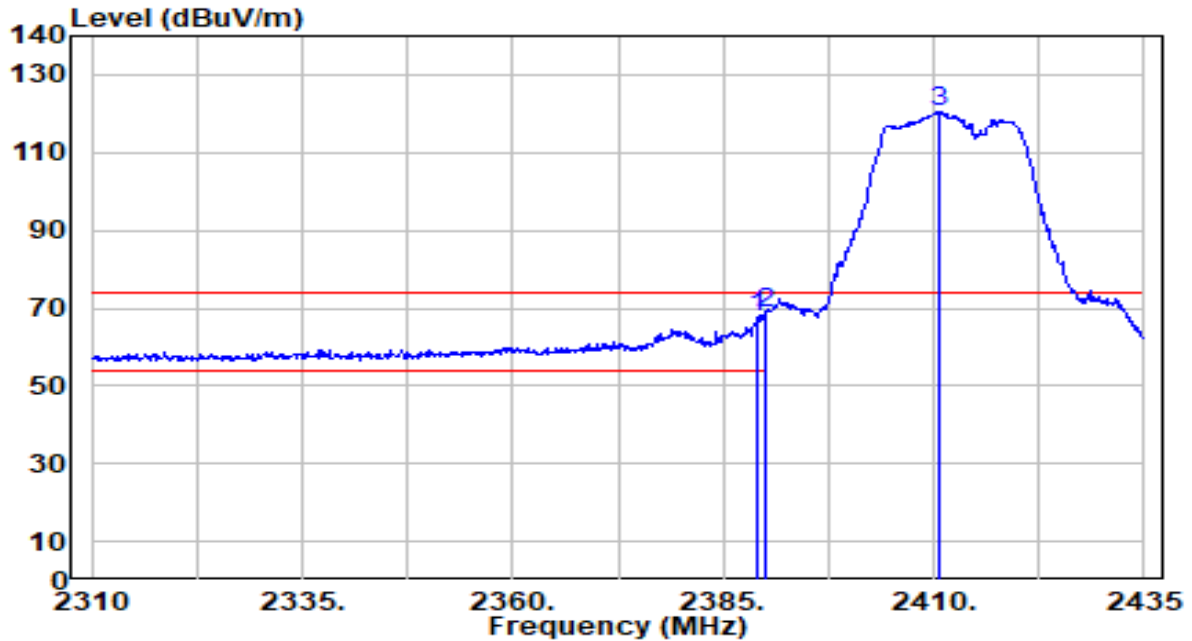


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	37.15	30.61	67.77	-6.23	74.00	163	119	Peak
2	* 2390.000	37.80	30.61	68.42	-5.58	74.00	163	119	Peak
3	2410.625	89.75	30.66	120.42	N/A	N/A	163	119	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

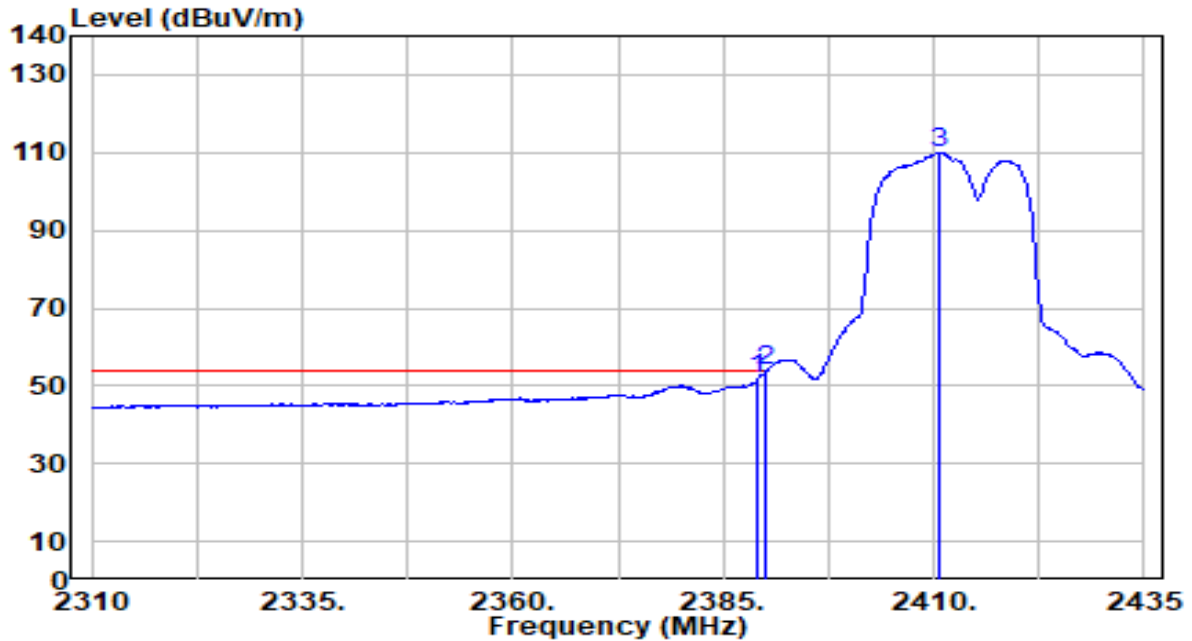


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	20.92	30.61	51.54	-2.46	54.00	163	119	Average
2	* 2390.000	23.22	30.61	53.83	-0.17	54.00	163	119	Average
3	2410.750	79.20	30.66	109.86	N/A	N/A	163	119	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

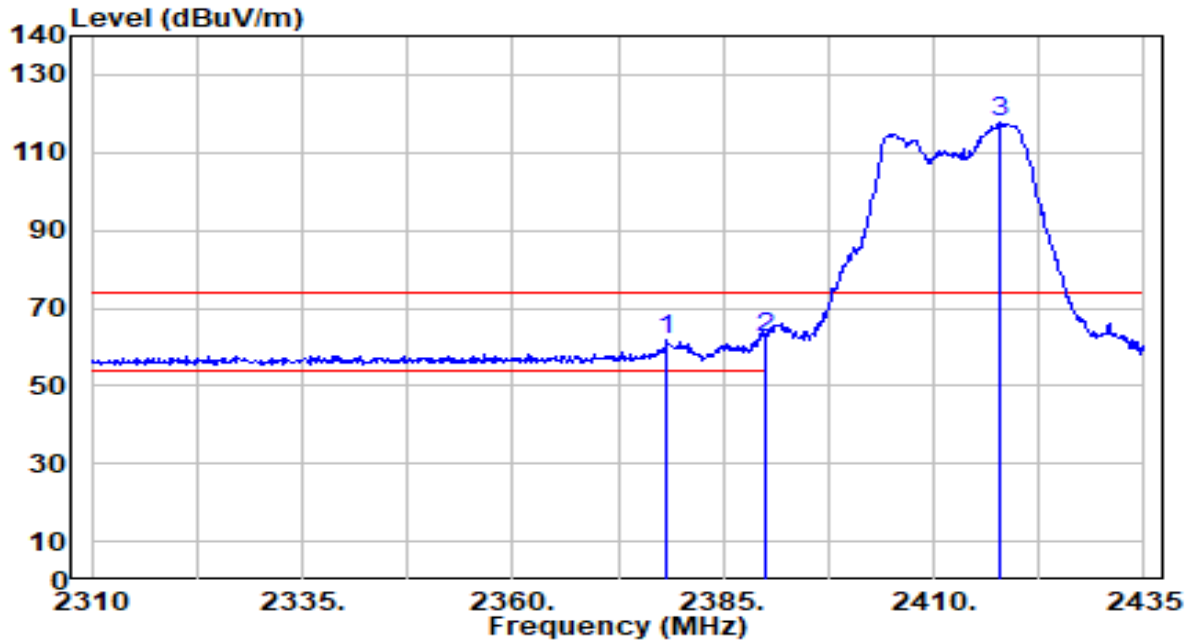


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2378.250	31.23	30.60	61.83	-12.17	74.00	242	137	Peak
2	* 2390.000	31.75	30.61	62.36	-11.64	74.00	242	137	Peak
3	2417.750	86.87	30.69	117.56	N/A	N/A	242	137	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

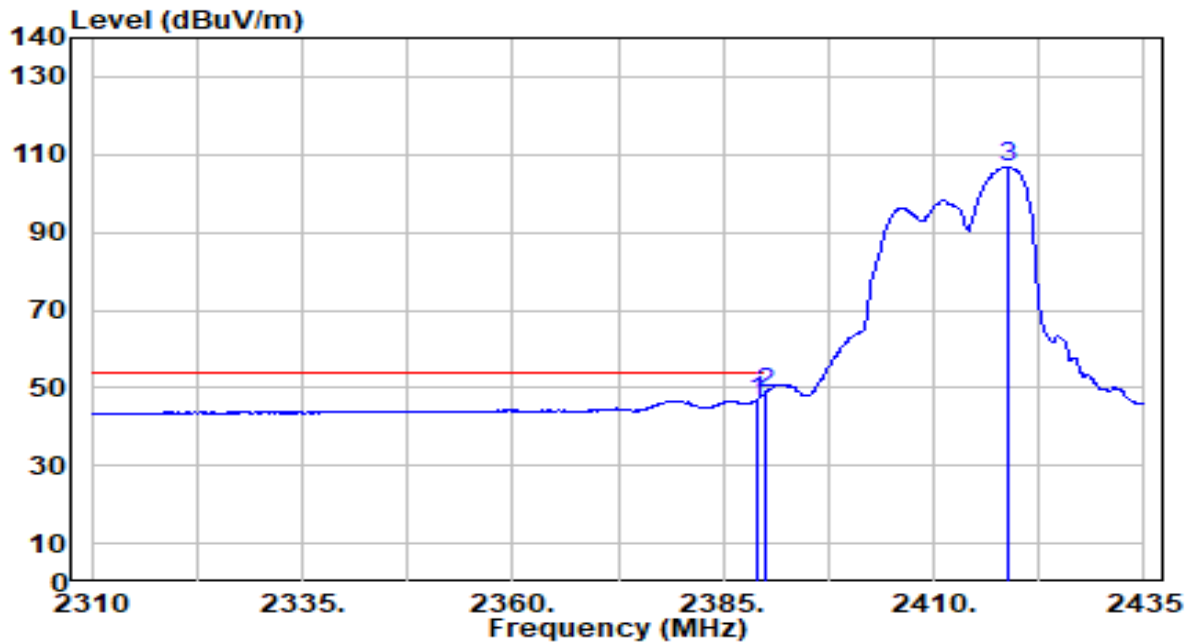


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	16.13	30.61	46.74	-7.26	54.00	242	137	Average
2	* 2390.000	17.97	30.61	48.59	-5.41	54.00	242	137	Average
3	2418.875	76.00	30.69	106.69	N/A	N/A	242	137	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 2_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

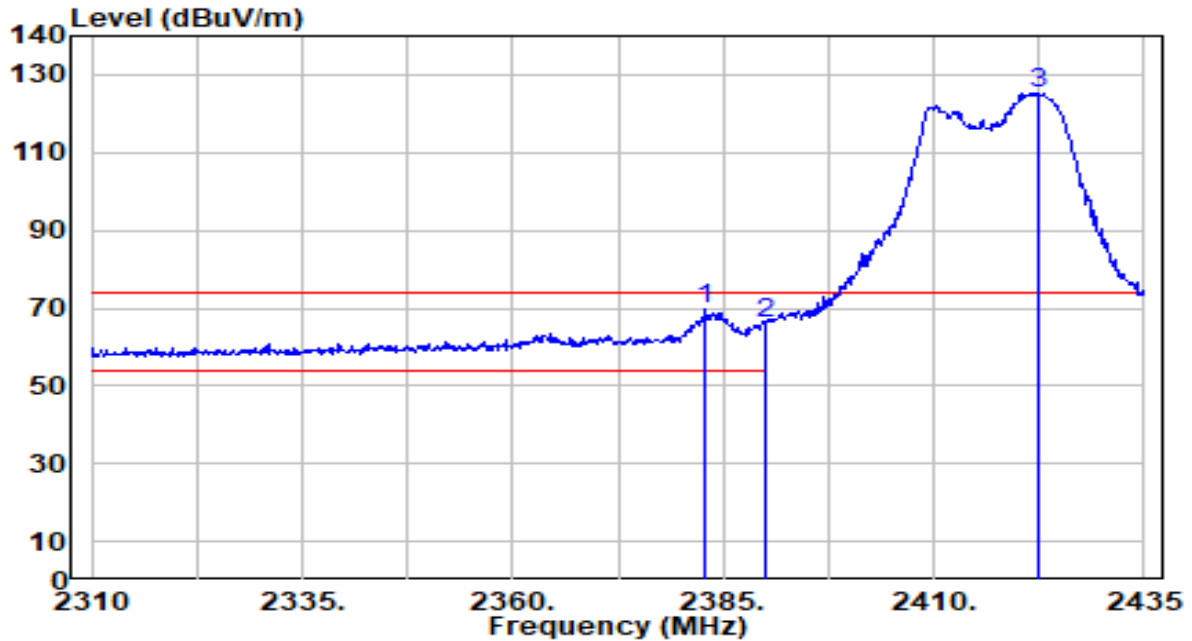


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2382.875	39.02	30.60	69.63	-4.37	74.00	140	119	Peak
2	2390.000	35.50	30.61	66.11	-7.89	74.00	140	119	Peak
3	2422.375	94.66	30.70	125.36	N/A	N/A	140	119	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 2_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

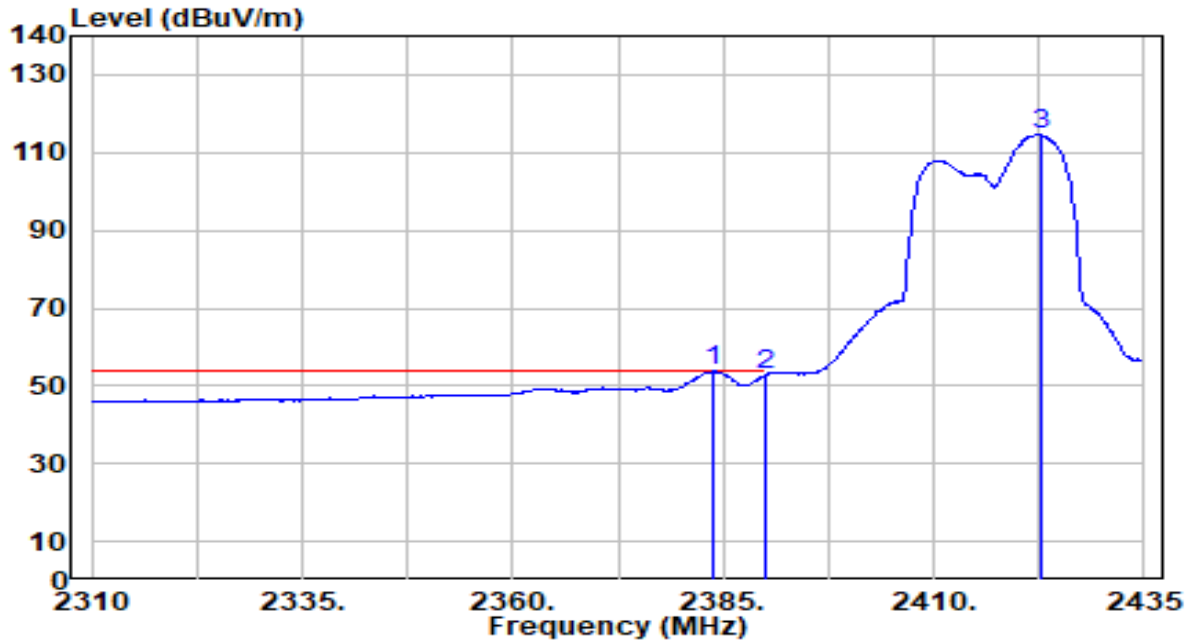


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.23	30.61	53.83	-0.17	54.00	140	119	Average
2		22.25	30.61	52.87	-1.13	54.00	140	119	Average
3		83.94	30.71	114.64	N/A	N/A	140	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 2_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

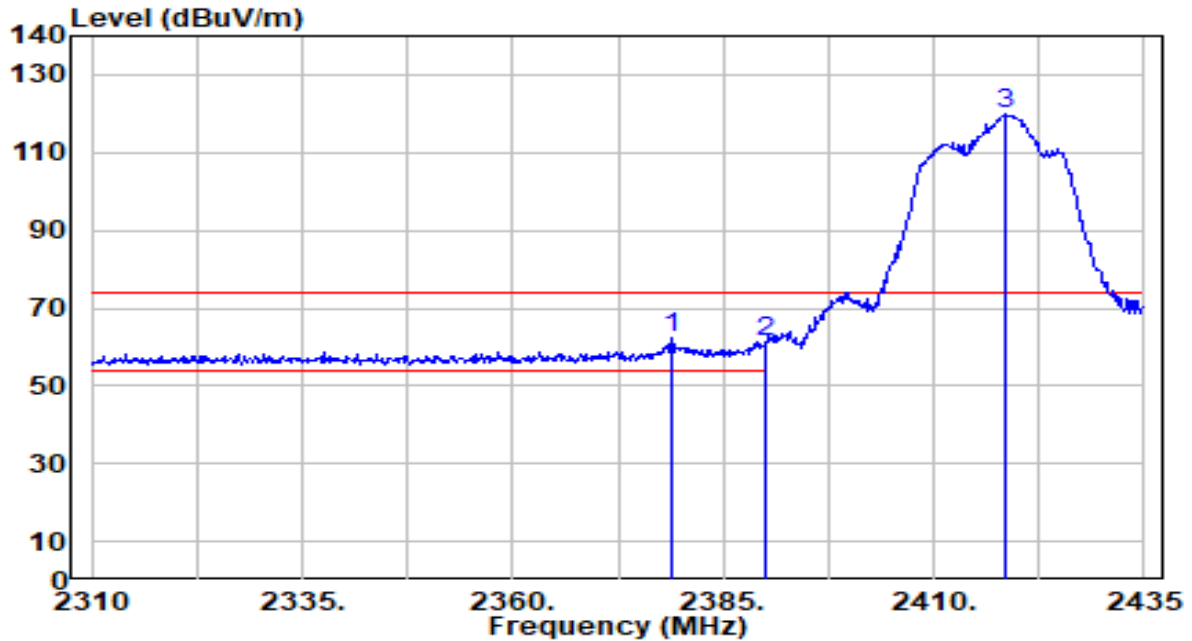


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2379.000	31.80	30.60	62.40	-11.60	74.00	300	137	Peak
2	2390.000	30.65	30.61	61.26	-12.74	74.00	300	137	Peak
3	2418.500	88.98	30.69	119.67	N/A	N/A	300	137	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 2_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

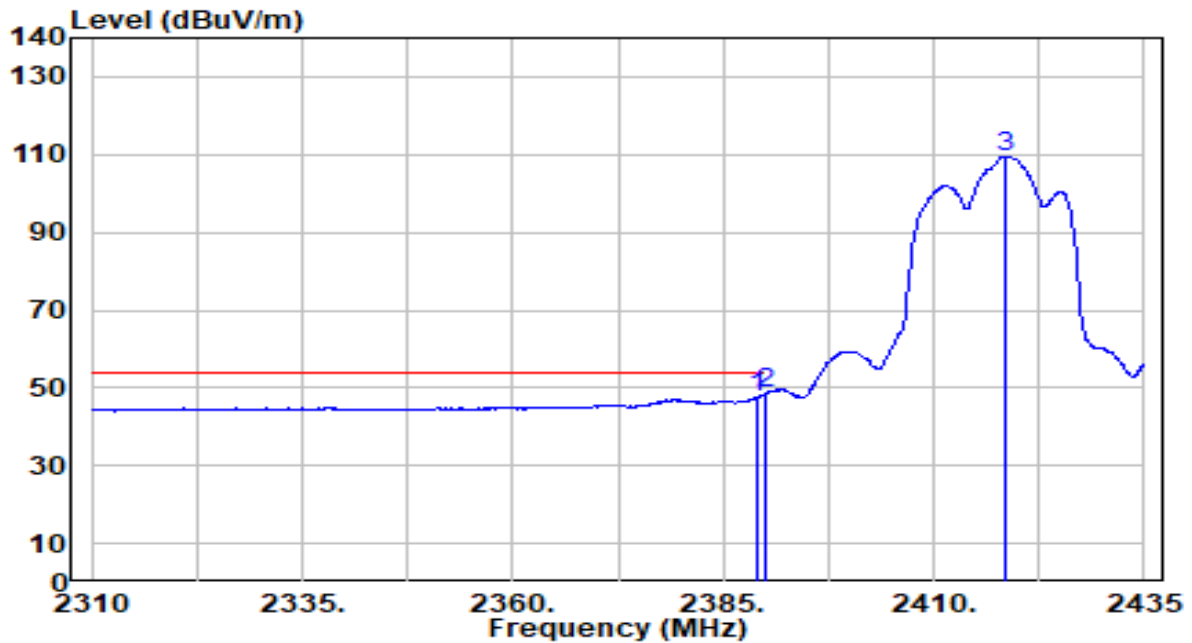


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	16.84	30.61	47.45	-6.55	54.00	300	137	Average
2	* 2390.000	17.86	30.61	48.47	-5.53	54.00	300	137	Average
3	2418.500	78.76	30.69	109.45	N/A	N/A	300	137	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

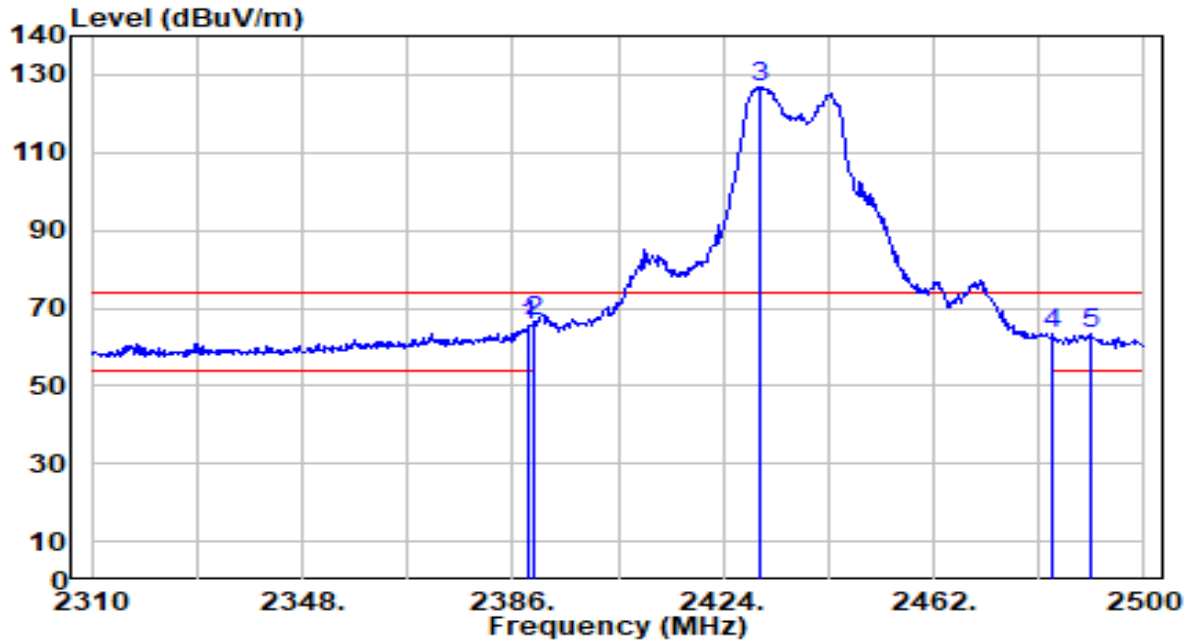


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	34.90	30.61	65.51	-8.49	74.00	176	121	Peak
2	* 2390.000	35.92	30.61	66.53	-7.47	74.00	176	121	Peak
3	2430.650	96.10	30.73	126.83	N/A	N/A	176	121	Peak
4	2483.500	32.50	30.91	63.41	-10.59	74.00	176	121	Peak
5	2490.500	32.20	30.94	63.13	-10.87	74.00	176	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

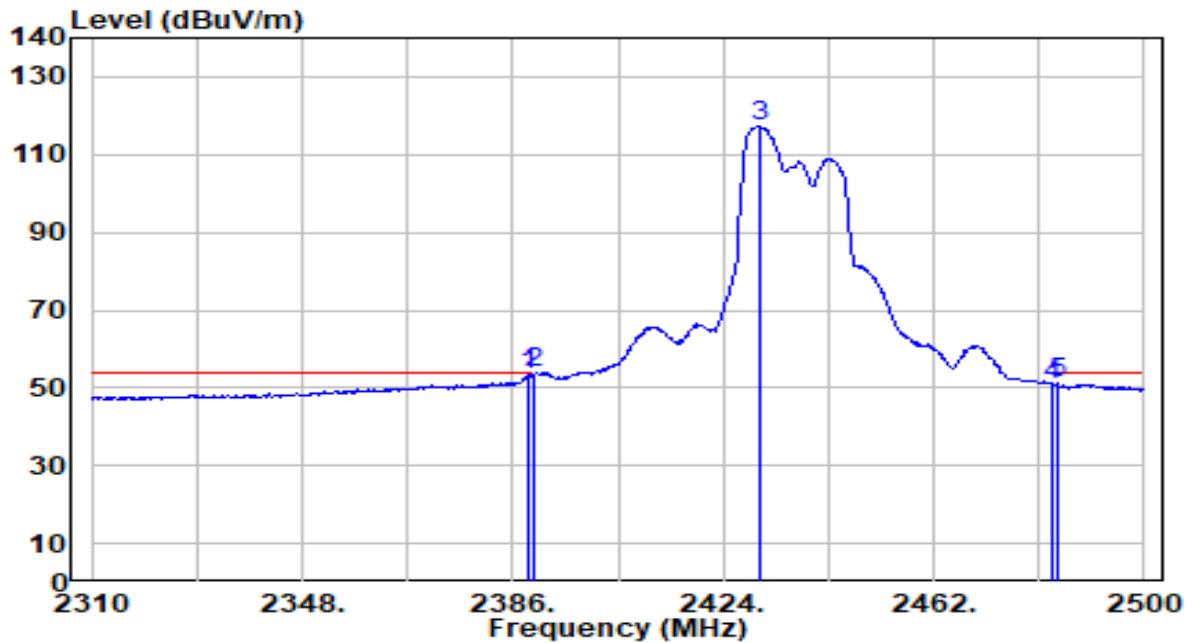


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	22.69	30.61	53.30	-0.70	54.00	176	121	Average
2	* 2390.000	23.23	30.61	53.84	-0.16	54.00	176	121	Average
3	2430.460	86.54	30.73	117.28	N/A	N/A	176	121	Average
4	2483.500	19.94	30.91	50.86	-3.14	54.00	176	121	Average
5	2484.230	20.10	30.92	51.02	-2.98	54.00	176	121	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

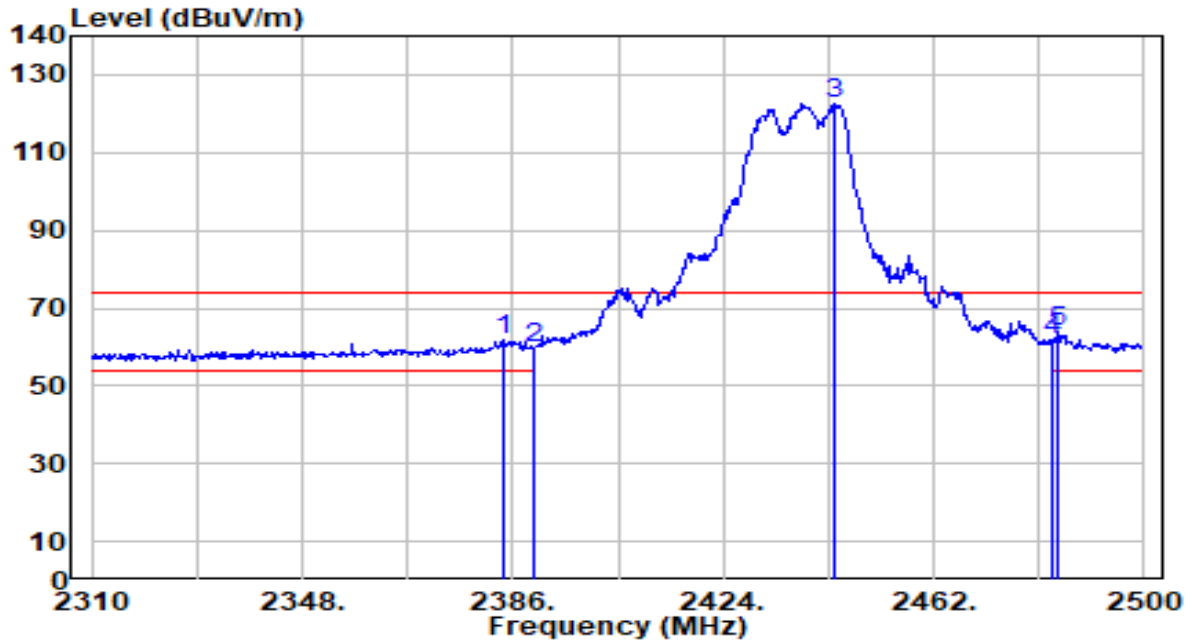


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	31.29	30.61	61.89	-12.11	74.00	110	204	Peak
2	2390.000	28.92	30.61	59.53	-14.47	74.00	110	204	Peak
3	2443.950	91.66	30.78	122.44	N/A	N/A	110	204	Peak
4	2483.500	30.74	30.91	61.66	-12.34	74.00	110	204	Peak
5	* 2484.610	33.10	30.92	64.02	-9.98	74.00	110	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

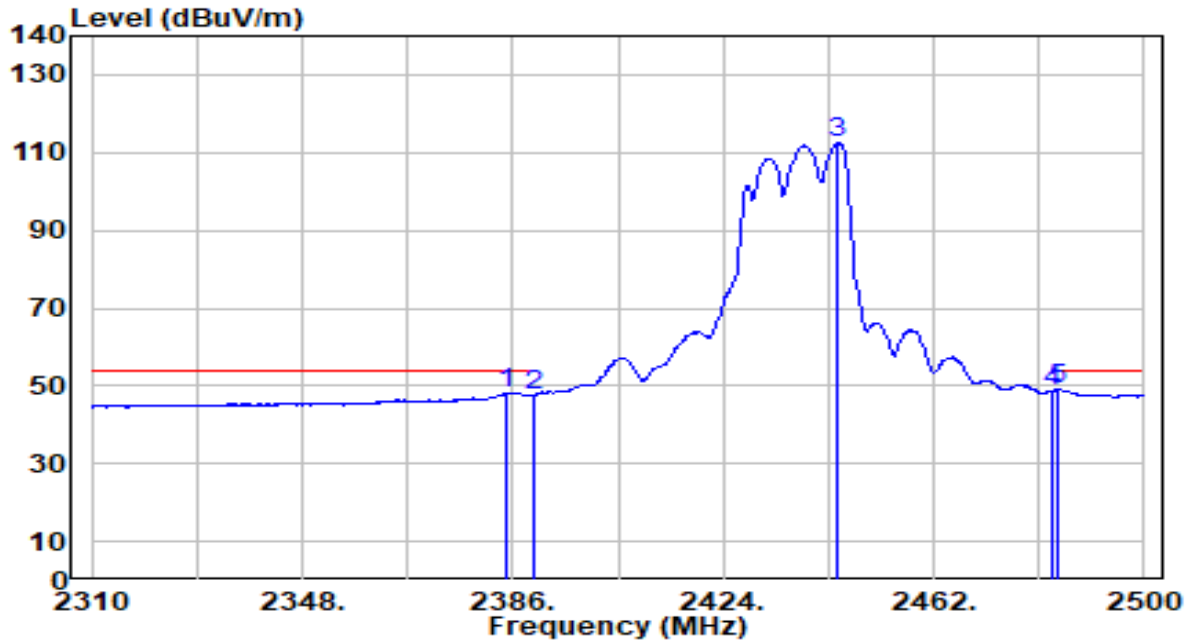


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.050	17.72	30.61	48.33	-5.67	54.00	110	204	Average
2	2390.000	17.10	30.61	47.71	-6.29	54.00	110	204	Average
3	2444.710	81.77	30.78	112.55	N/A	N/A	110	204	Average
4	2483.500	17.89	30.91	48.81	-5.19	54.00	110	204	Average
5	* 2484.230	18.32	30.92	49.23	-4.77	54.00	110	204	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

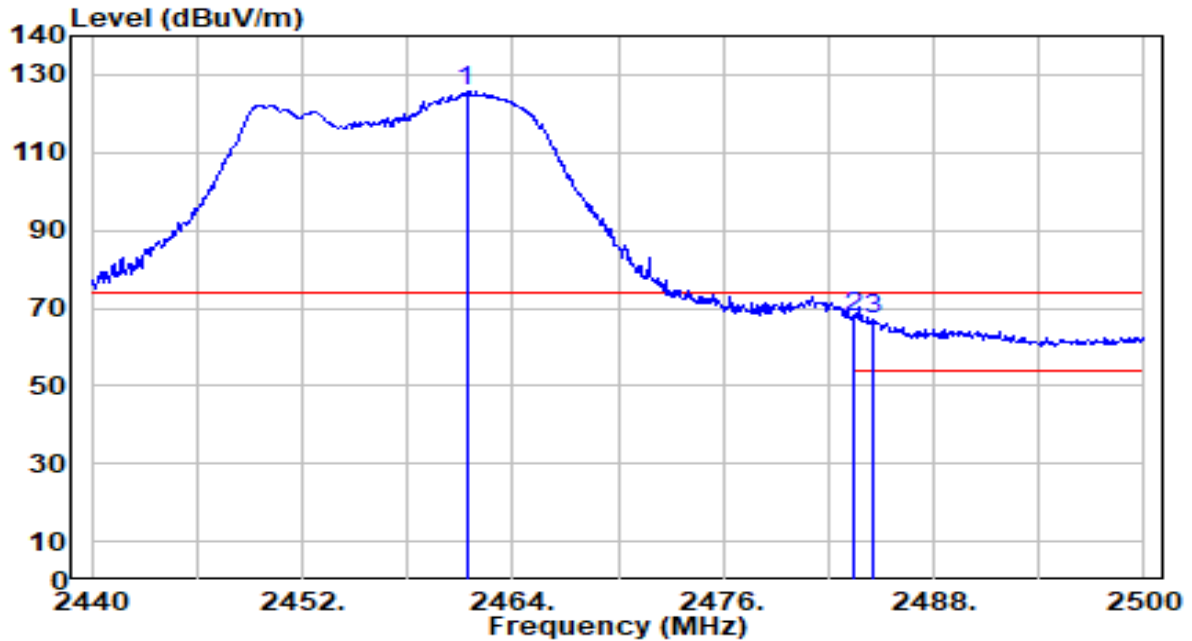


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.360	94.99	30.84	125.83	N/A	N/A	152	117	Peak
2	* 2483.500	36.76	30.91	67.68	-6.32	74.00	152	117	Peak
3	2484.520	36.18	30.92	67.09	-6.91	74.00	152	117	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

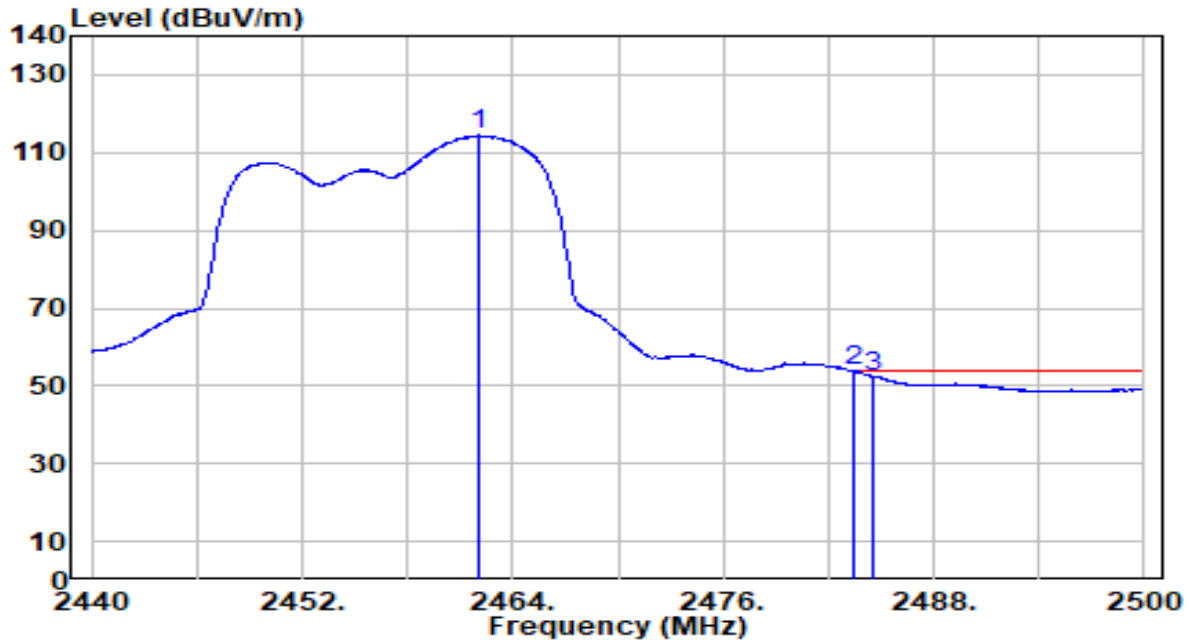


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.020	83.56	30.84	114.40	N/A	N/A	152	117	Average
2	* 2483.500	22.91	30.91	53.83	-0.17	54.00	152	117	Average
3	2484.520	21.55	30.92	52.47	-1.53	54.00	152	117	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

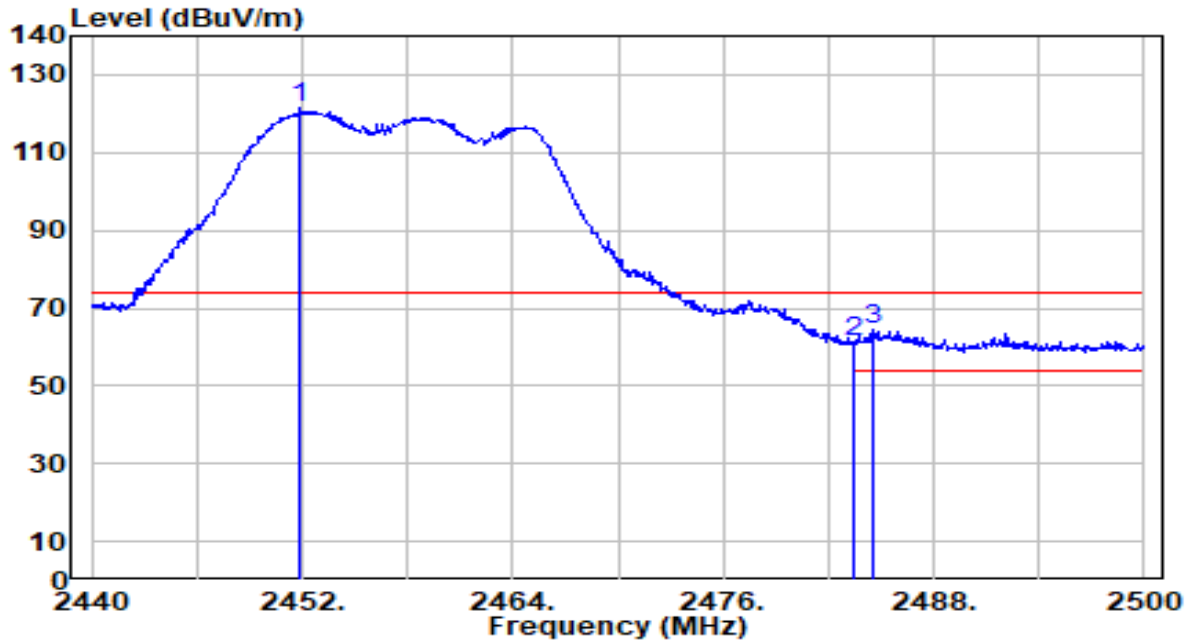


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.880	90.66	30.81	121.46	N/A	N/A	114	204	Peak
2	2483.500	30.60	30.91	61.51	-12.49	74.00	114	204	Peak
3	* 2484.520	33.32	30.92	64.23	-9.77	74.00	114	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

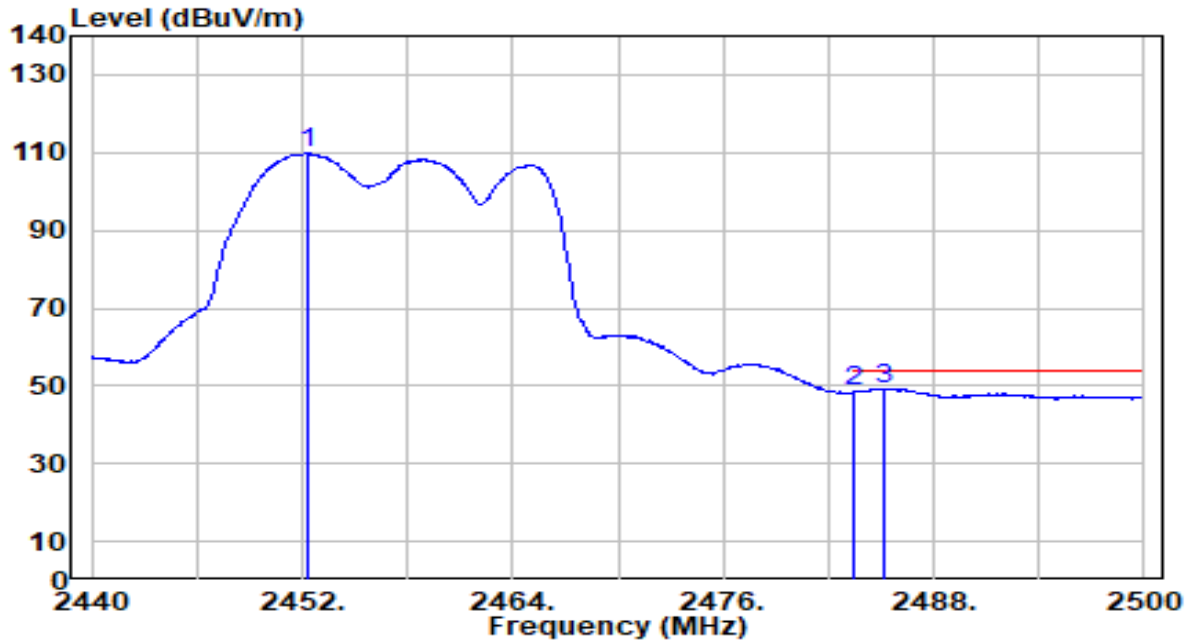


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2452.360	79.01	30.81	109.82	N/A	N/A	114	204	Average
2	2483.500	17.61	30.91	48.53	-5.47	54.00	114	204	Average
3	* 2485.240	18.28	30.92	49.20	-4.80	54.00	114	204	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

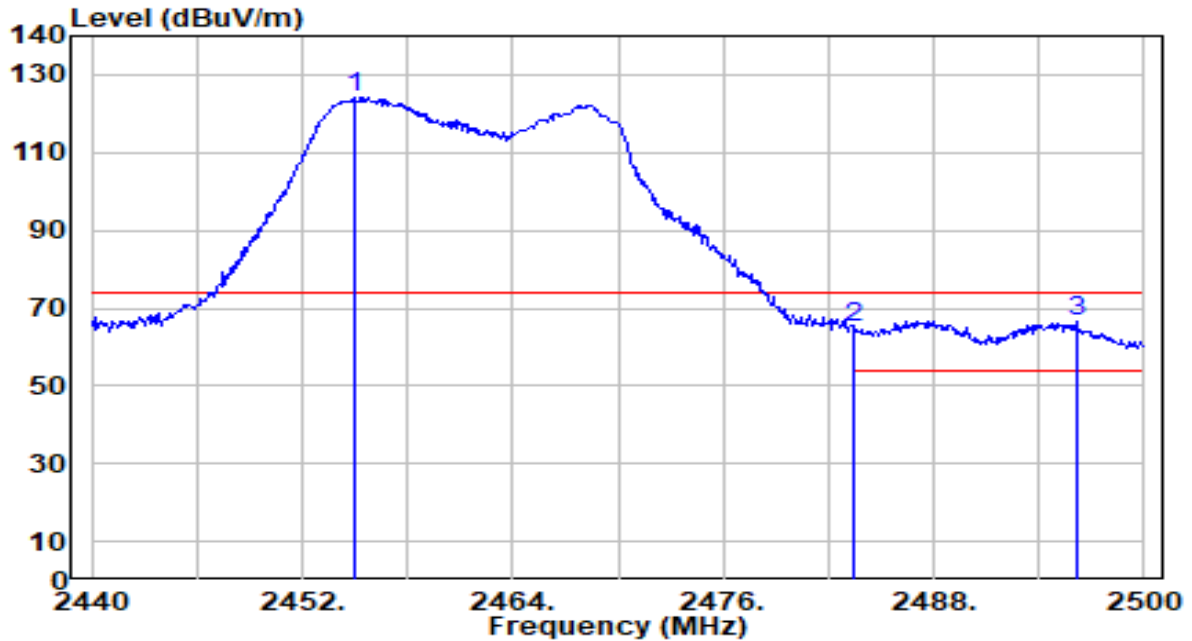


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.060	93.57	30.82	124.38	N/A	N/A	171	117	Peak
2	2483.500	33.90	30.91	64.81	-9.19	74.00	171	117	Peak
3	* 2496.100	35.73	30.96	66.69	-7.31	74.00	171	117	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

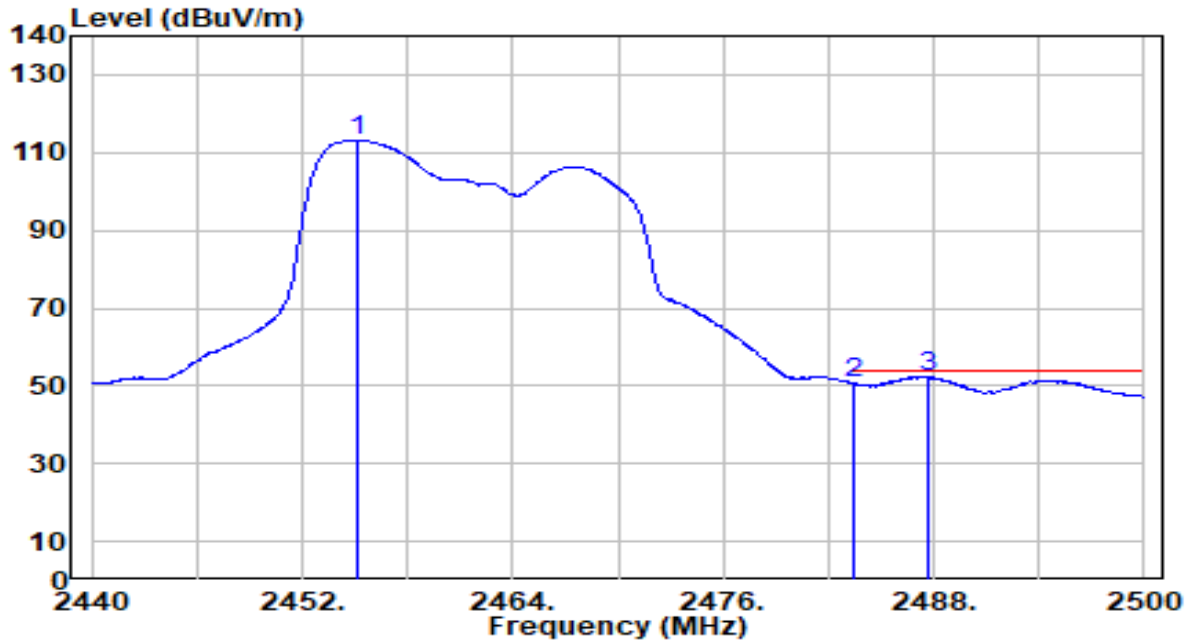


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.180	82.46	30.82	113.28	N/A	N/A	171	117	Average
2	2483.500	19.62	30.91	50.53	-3.47	54.00	171	117	Average
3	* 2487.700	21.42	30.93	52.35	-1.65	54.00	171	117	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

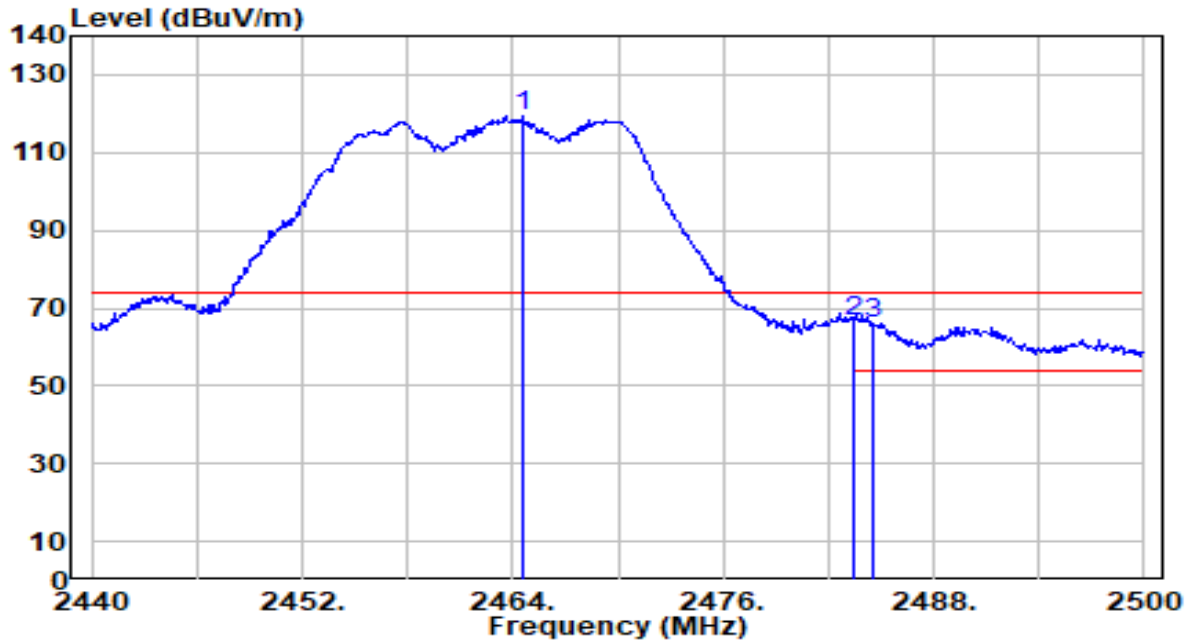


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.540	88.54	30.85	119.39	N/A	N/A	110	204	Peak
2	* 2483.500	35.88	30.91	66.79	-7.21	74.00	110	204	Peak
3	2484.520	35.08	30.92	66.00	-8.00	74.00	110	204	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

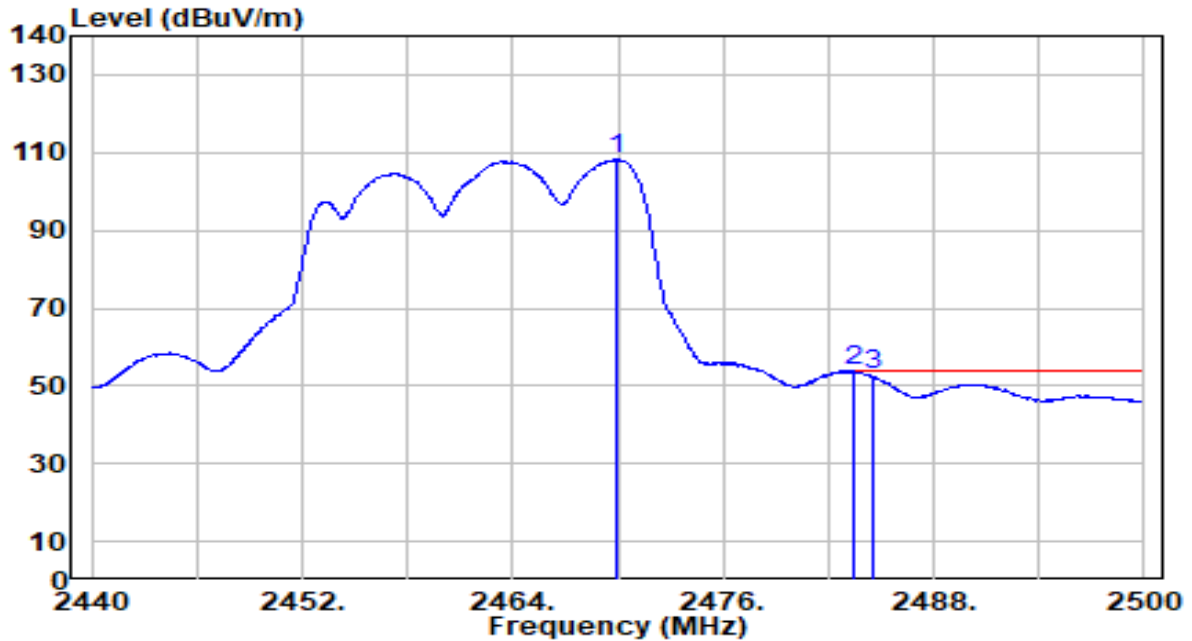


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.940	77.21	30.87	108.08	N/A	N/A	110	204	Average
2	* 2483.500	22.91	30.91	53.82	-0.18	54.00	110	204	Average
3	2484.520	21.69	30.92	52.61	-1.39	54.00	110	204	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

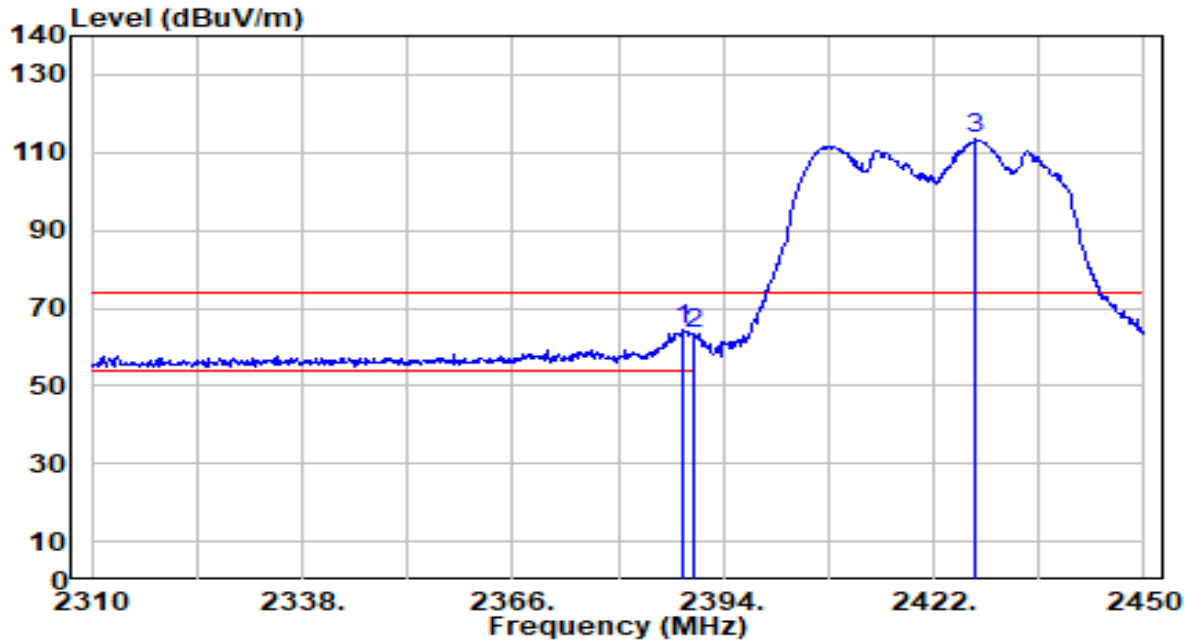


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.680	33.60	30.61	64.21	-9.79	74.00	154	119	Peak
2		2390.000	33.02	30.61	63.63	-10.37	74.00	154	119	Peak
3		2427.600	82.76	30.72	113.49	N/A	N/A	154	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

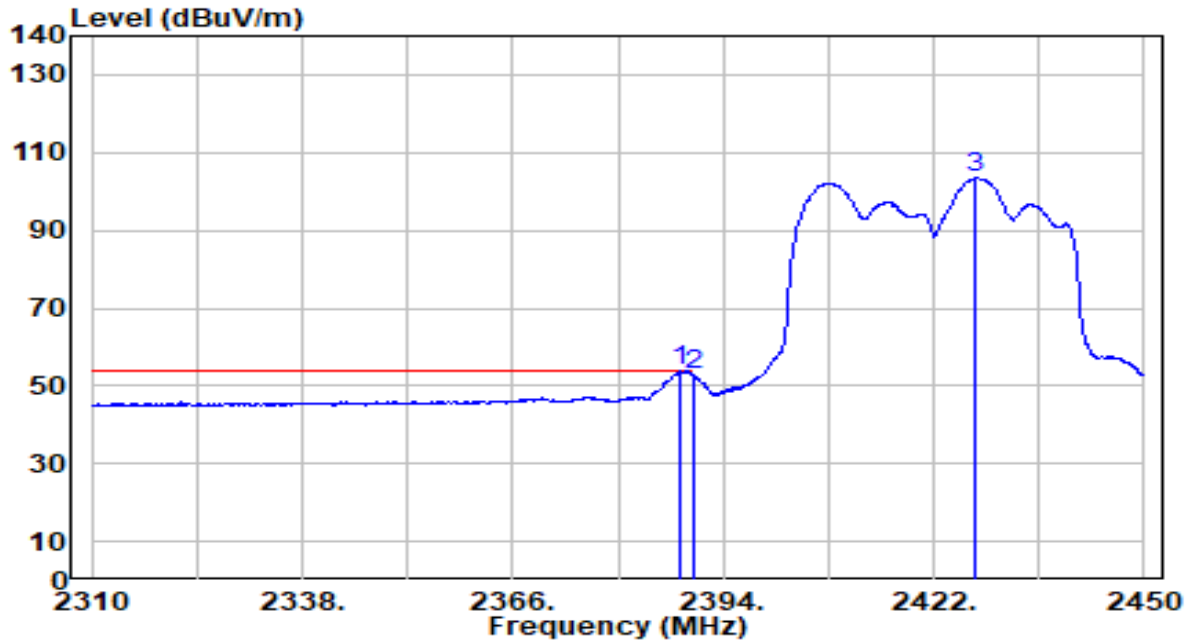


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.25	30.61	53.86	-0.14	54.00	154	119	Average
2		22.11	30.61	52.73	-1.27	54.00	154	119	Average
3		72.77	30.72	103.49	N/A	N/A	154	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

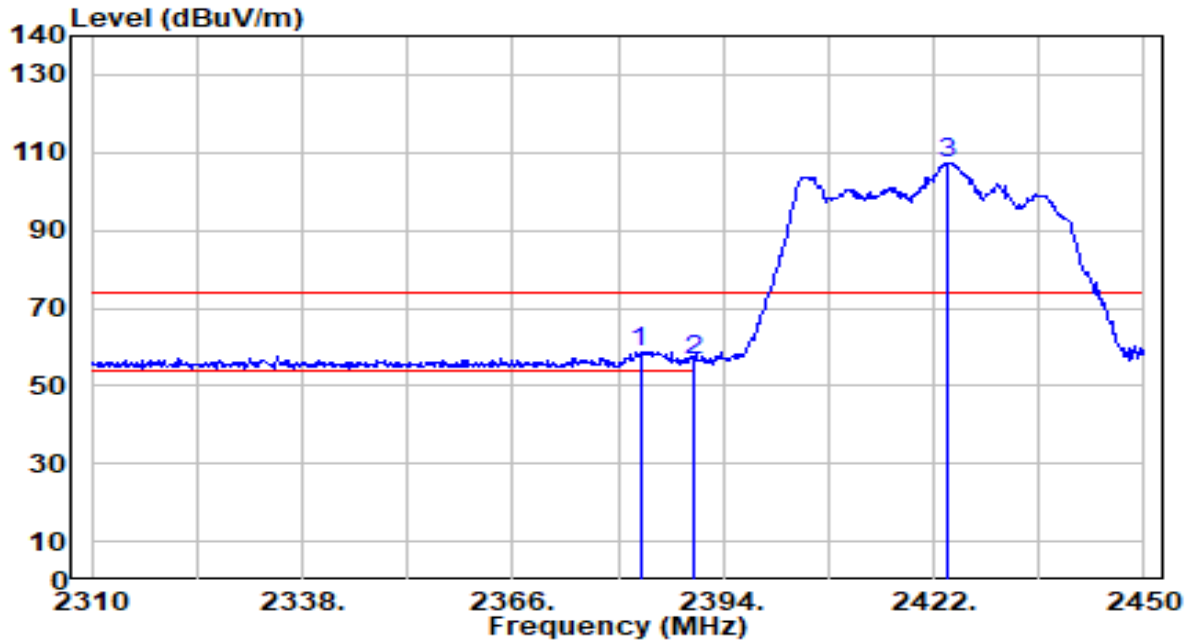


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2382.940	28.29	30.60	58.89	-15.11	74.00	301	137	Peak
2		2390.000	25.66	30.61	56.27	-17.73	74.00	301	137	Peak
3		2423.960	76.70	30.71	107.41	N/A	N/A	301	137	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

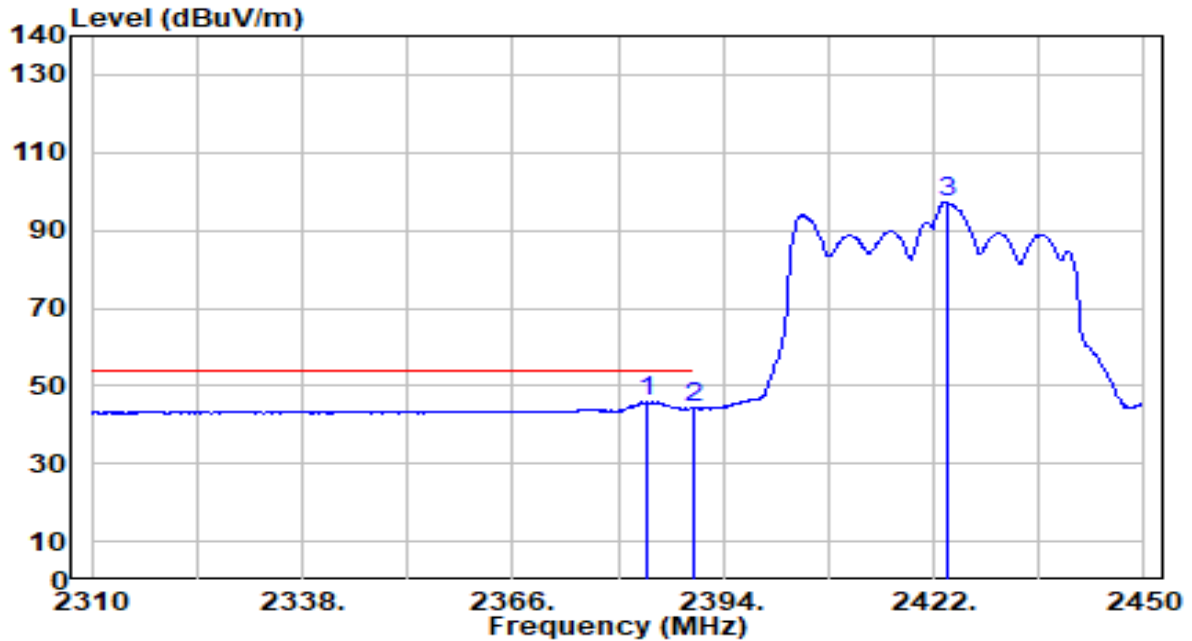


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2383.920	15.24	30.61	45.84	-8.16	54.00	301	137	Average
2		2390.000	13.64	30.61	44.26	-9.74	54.00	301	137	Average
3		2423.820	66.29	30.71	97.00	N/A	N/A	301	137	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 4_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

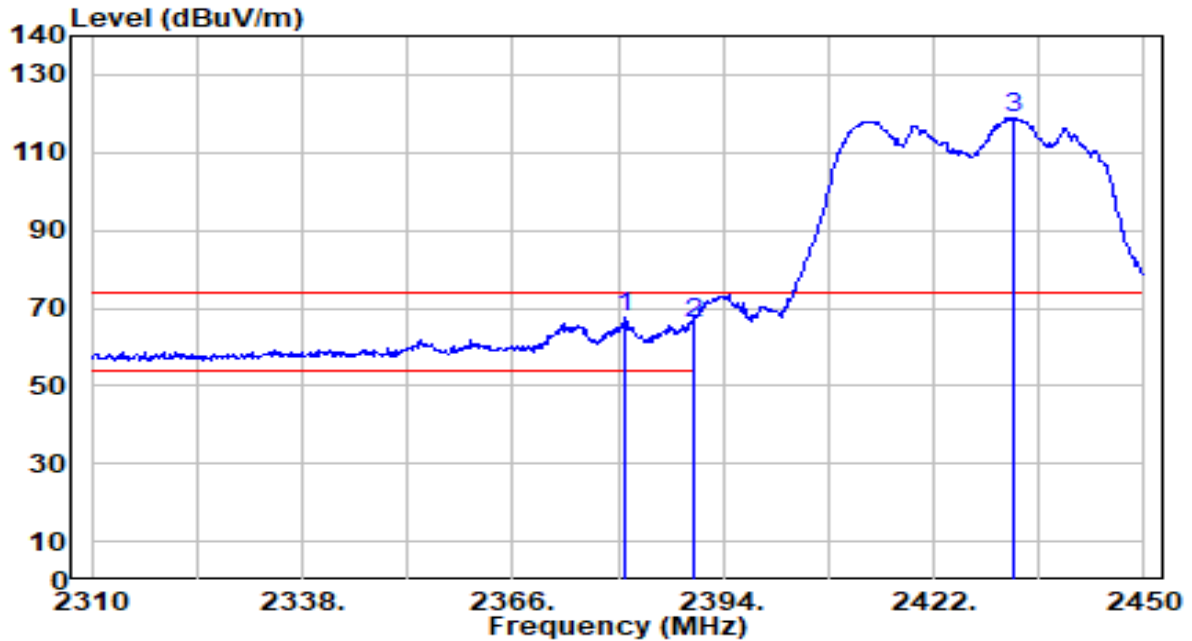


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2380.980	36.95	30.60	67.55	-6.45	74.00	154	116	Peak
2		2390.000	35.59	30.61	66.20	-7.80	74.00	154	116	Peak
3		2432.500	88.34	30.74	119.08	N/A	N/A	154	116	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 4_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

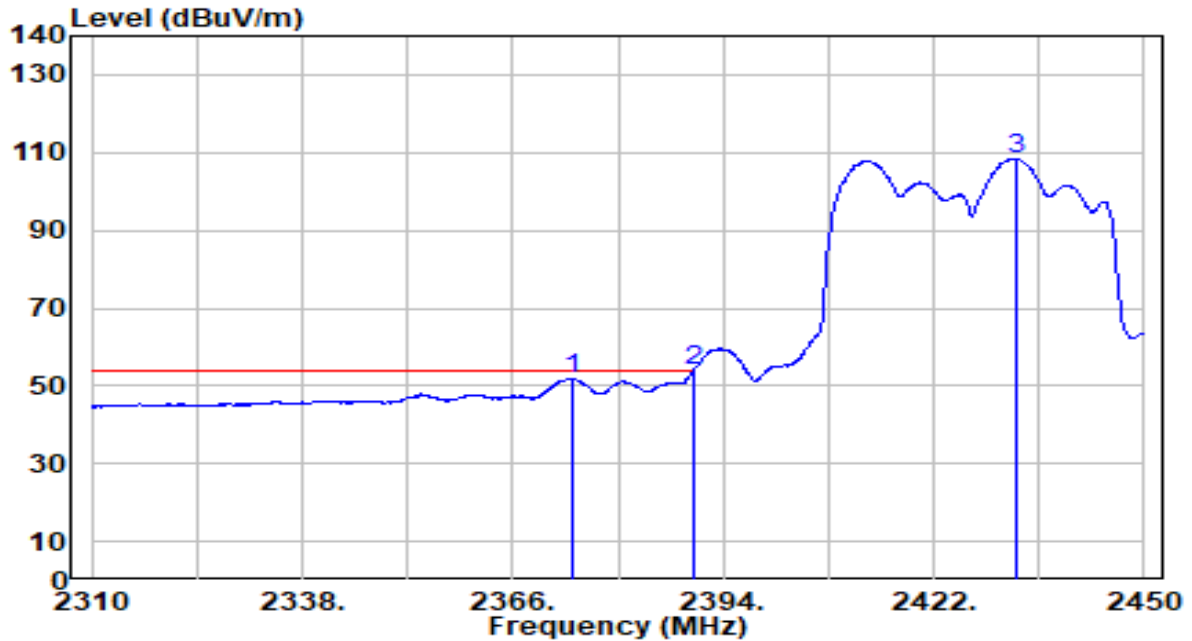


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2373.980	21.20	30.59	51.79	-2.21	54.00	154	116	Average
2	* 2390.000	23.20	30.61	53.81	-0.19	54.00	154	116	Average
3	2432.920	77.71	30.74	108.46	N/A	N/A	154	116	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 4_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

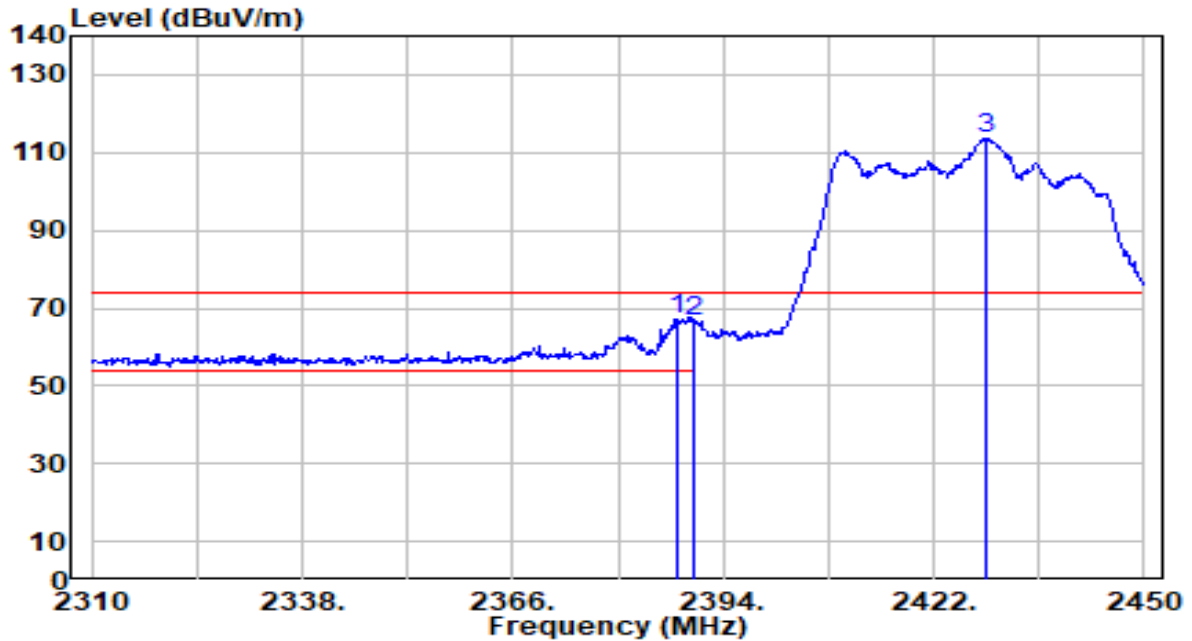


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.980	36.43	30.61	67.05	-6.96	74.00	301	137	Peak
2		2390.000	36.20	30.61	66.81	-7.19	74.00	301	137	Peak
3		2429.000	82.88	30.73	113.61	N/A	N/A	301	137	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 4_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

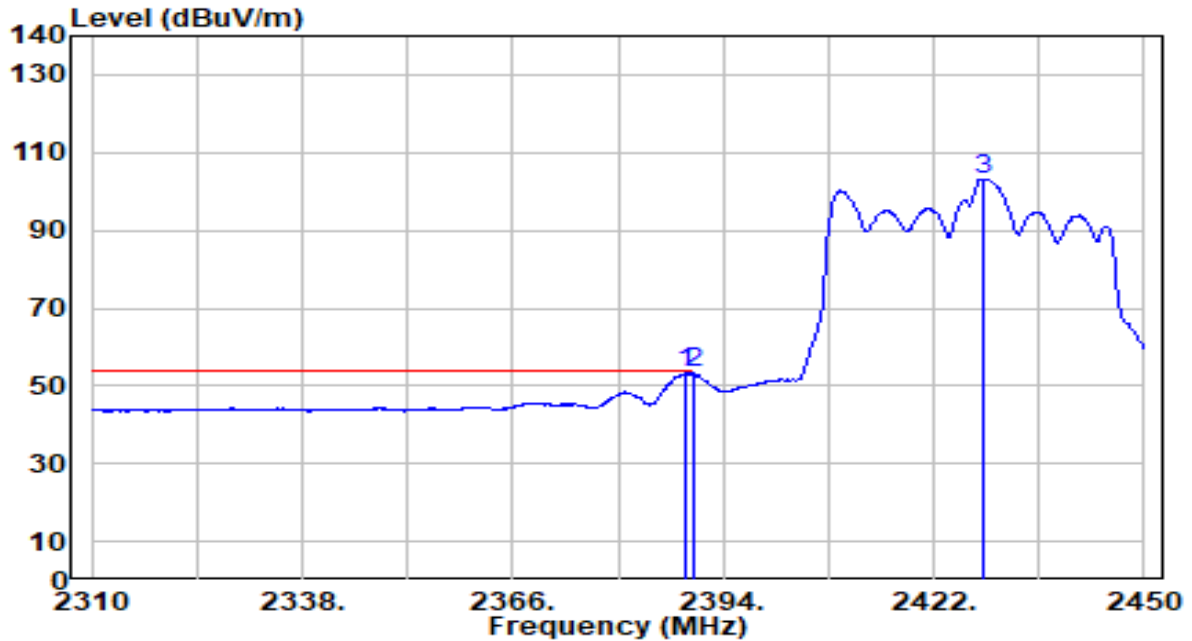


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	22.49	30.61	53.10	-0.90	54.00	301	137	Average
2	* 2390.000	22.82	30.61	53.43	-0.57	54.00	301	137	Average
3	2428.440	72.51	30.73	103.24	N/A	N/A	301	137	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

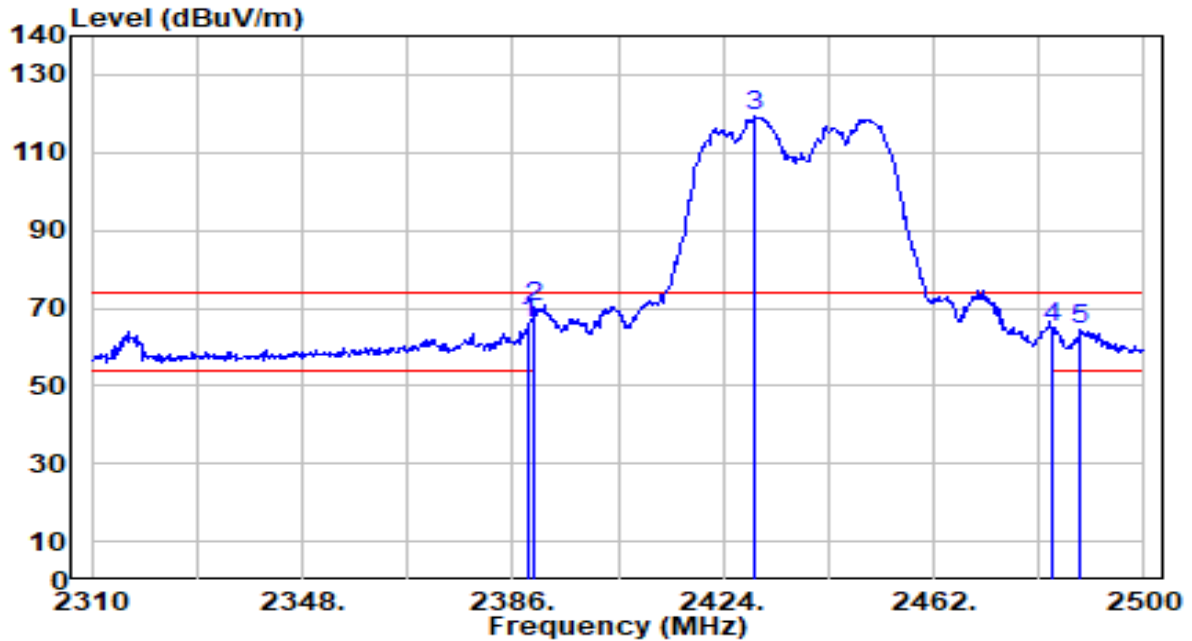


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	35.28	30.61	65.89	-8.11	74.00	176	121	Peak
2	* 2390.000	39.88	30.61	70.49	-3.51	74.00	176	121	Peak
3	2429.700	88.83	30.73	119.56	N/A	N/A	176	121	Peak
4	2483.500	33.87	30.91	64.78	-9.22	74.00	176	121	Peak
5	2488.600	33.72	30.93	64.65	-9.35	74.00	176	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

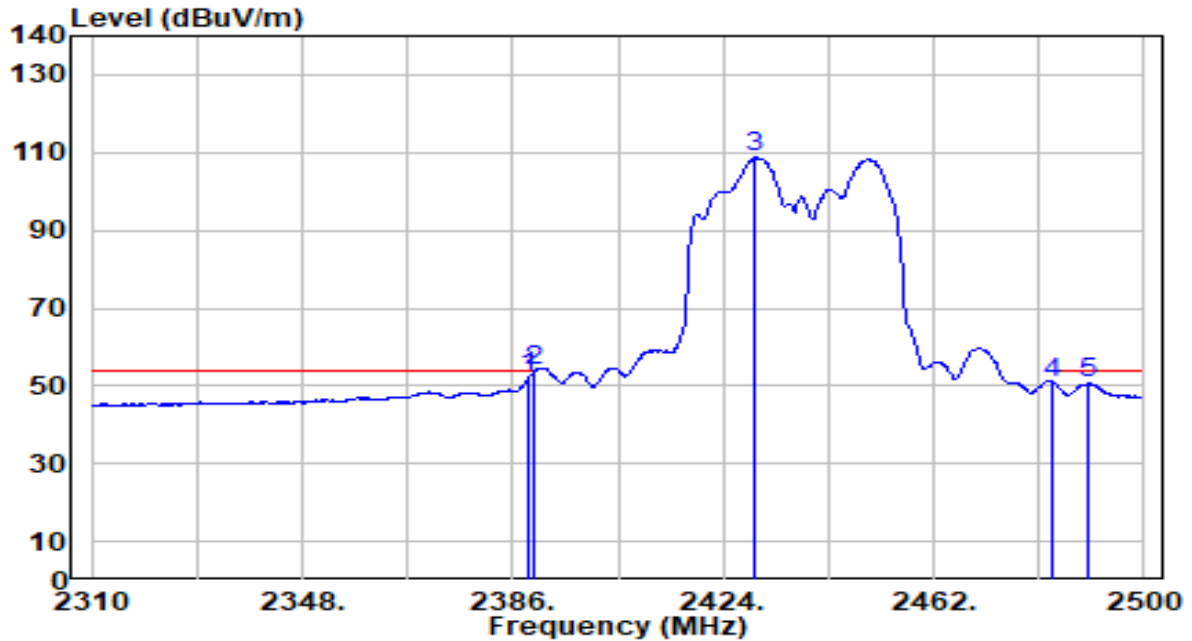


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	21.84	30.61	52.45	-1.55	54.00	176	121	Average
2	* 2390.000	23.28	30.61	53.89	-0.11	54.00	176	121	Average
3	2429.510	77.87	30.73	108.60	N/A	N/A	176	121	Average
4	2483.500	20.00	30.91	50.92	-3.08	54.00	176	121	Average
5	2489.930	19.67	30.94	50.61	-3.39	54.00	176	121	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

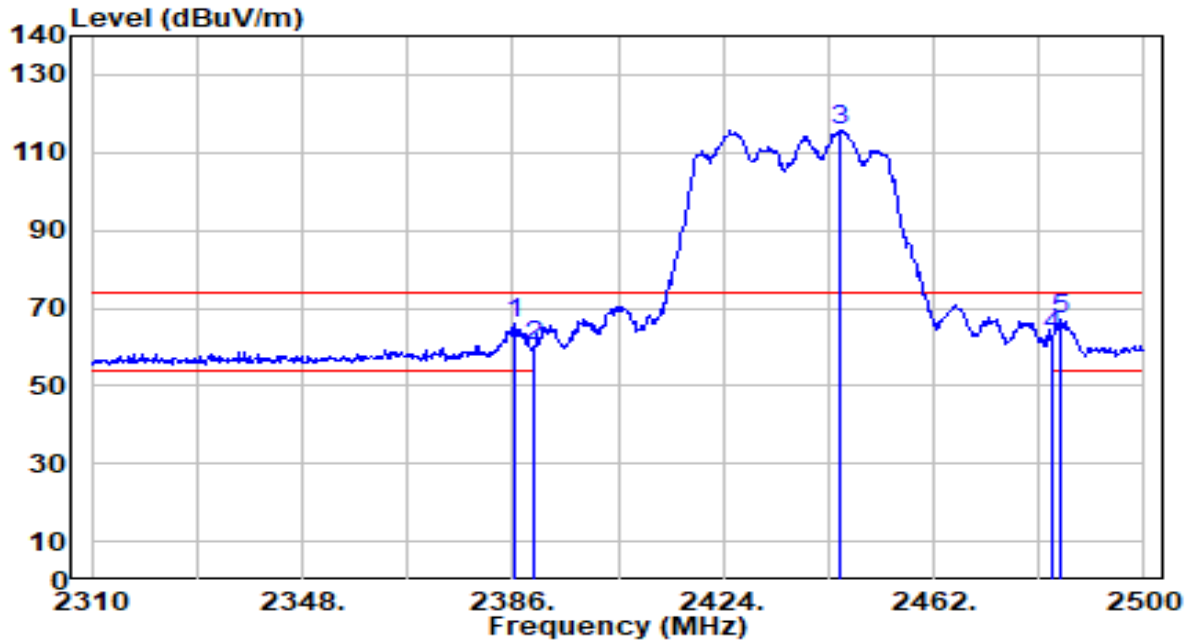


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.570	35.24	30.61	65.85	-8.15	74.00	110	204	Peak
2	2390.000	29.51	30.61	60.12	-13.88	74.00	110	204	Peak
3	2445.280	85.02	30.78	115.80	N/A	N/A	110	204	Peak
4	2483.500	32.03	30.91	62.94	-11.06	74.00	110	204	Peak
5	* 2484.800	36.05	30.92	66.97	-7.03	74.00	110	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

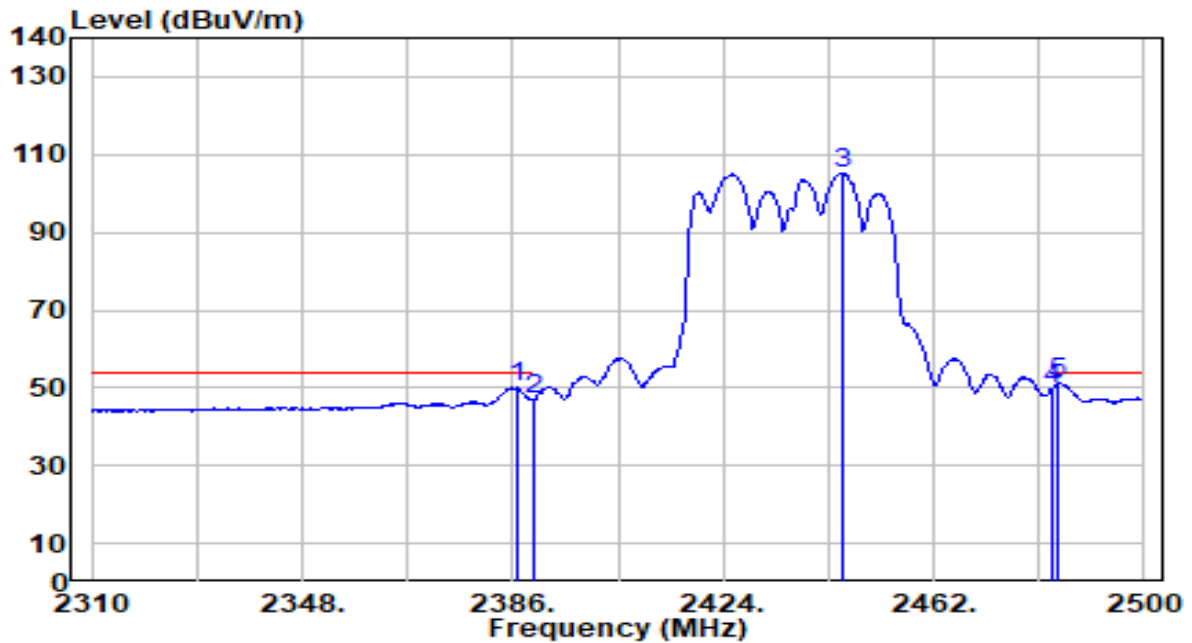


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	19.36	30.61	49.97	-4.03	54.00	110	204	Average
2	2390.000	16.44	30.61	47.05	-6.95	54.00	110	204	Average
3	2445.470	74.49	30.78	105.27	N/A	N/A	110	204	Average
4	2483.500	18.96	30.91	49.87	-4.13	54.00	110	204	Average
5	* 2484.610	20.30	30.92	51.21	-2.79	54.00	110	204	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

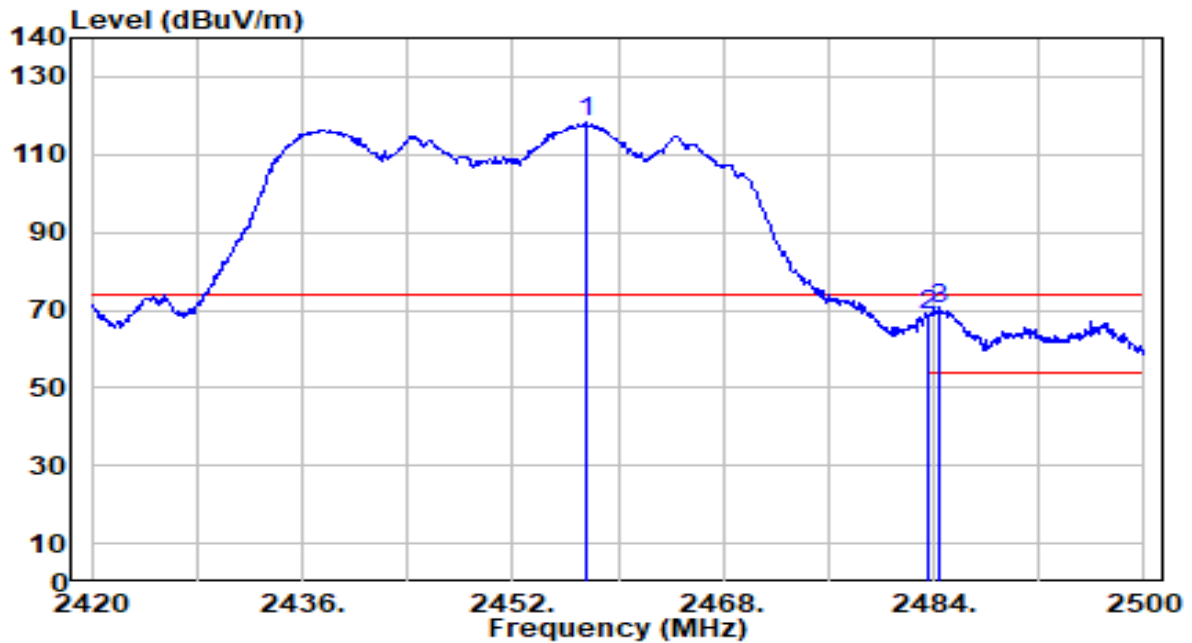


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.520	87.33	30.82	118.15	N/A	N/A	152	117	Peak
2	2483.500	37.93	30.91	68.84	-5.16	74.00	152	117	Peak
3	* 2484.480	39.56	30.92	70.48	-3.52	74.00	152	117	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

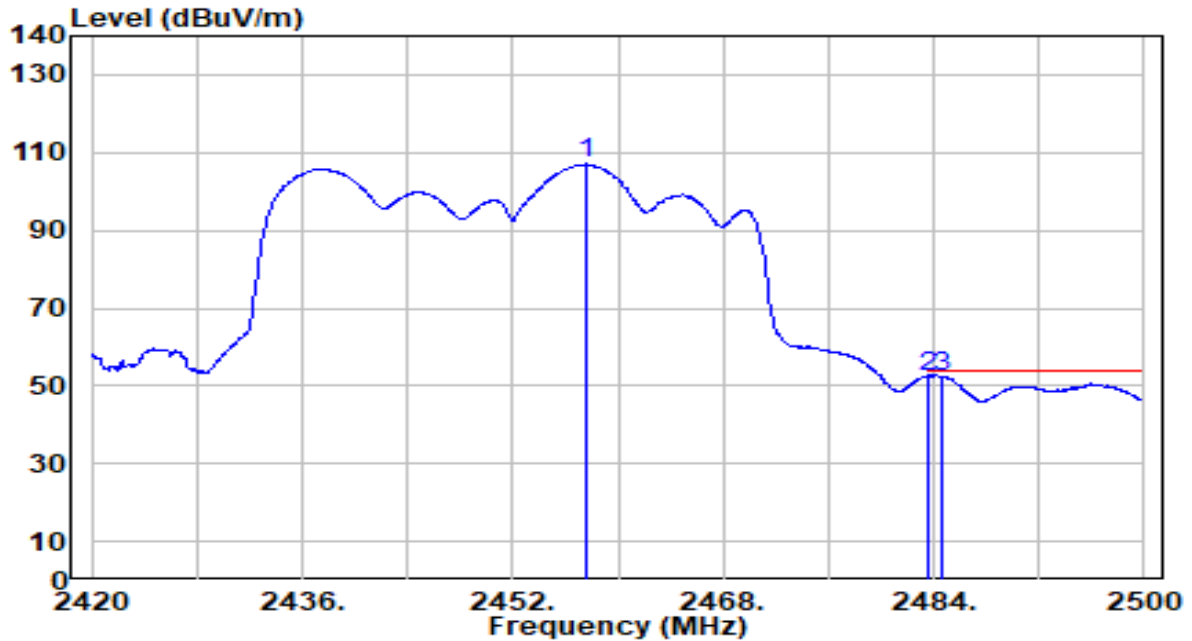


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.680	76.20	30.83	107.02	N/A	N/A	152	117	Average
2	2483.500	21.52	30.91	52.43	-1.57	54.00	152	117	Average
3	* 2484.560	21.63	30.92	52.55	-1.45	54.00	152	117	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

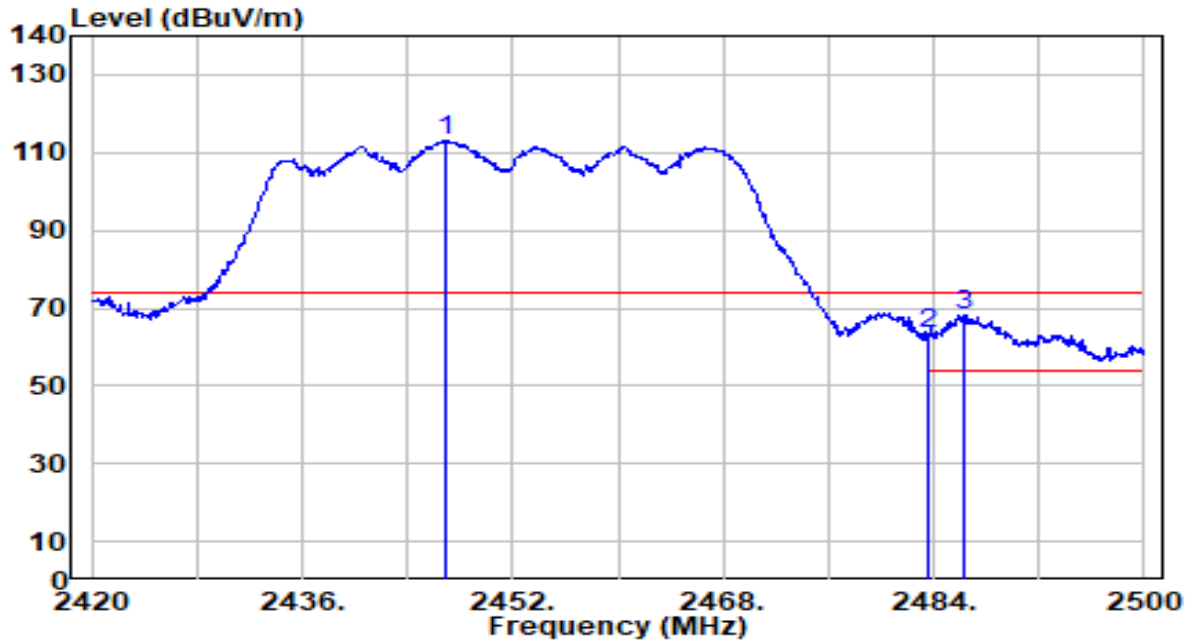


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.960	82.25	30.79	113.04	N/A	N/A	114	204	Peak
2	2483.500	32.23	30.91	63.14	-10.86	74.00	114	204	Peak
3	* 2486.240	37.18	30.92	68.11	-5.89	74.00	114	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

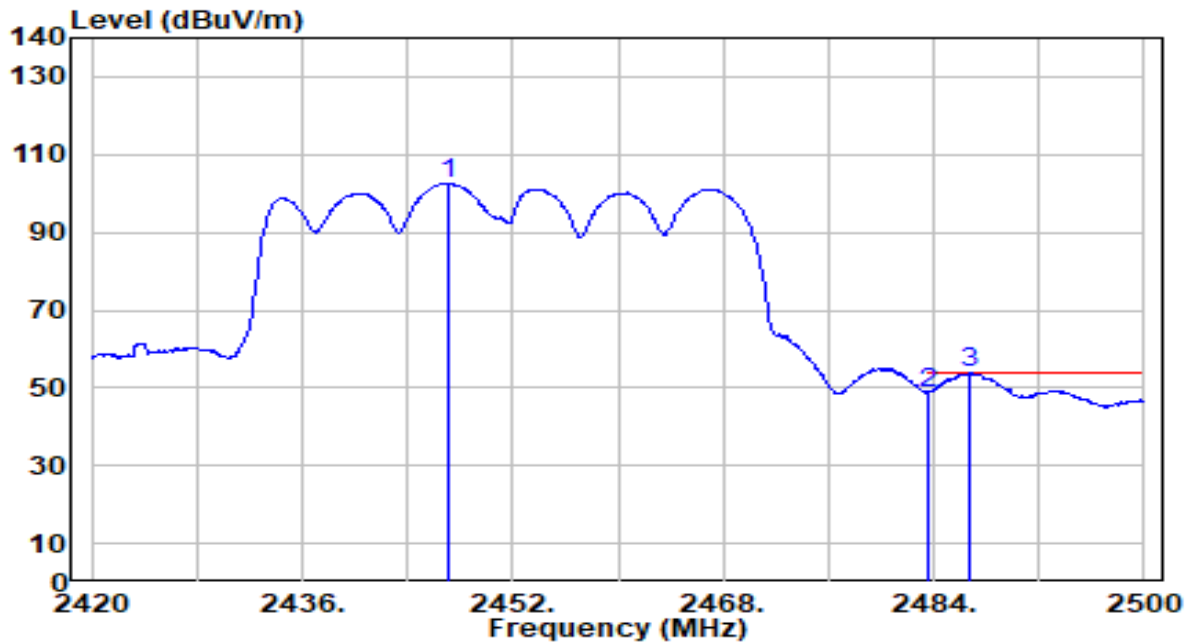


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.200	71.75	30.79	102.53	N/A	N/A	114	204	Average
2	2483.500	17.88	30.91	48.80	-5.20	54.00	114	204	Average
3	* 2486.720	22.98	30.92	53.90	-0.10	54.00	114	204	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

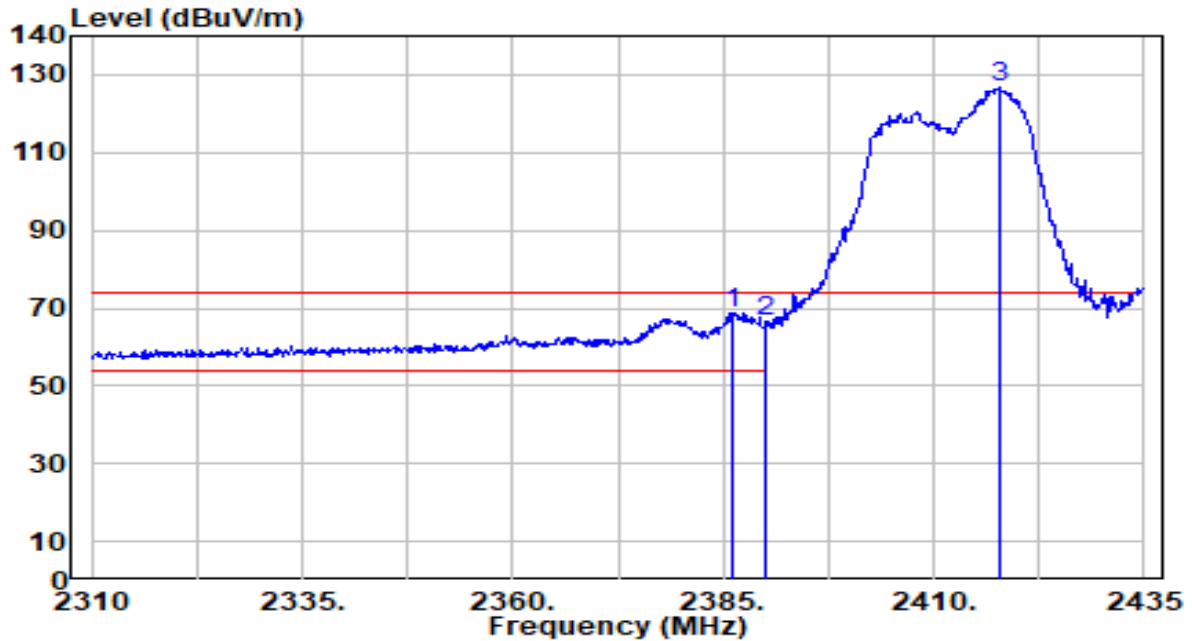


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.250	38.08	30.61	68.68	-5.32	74.00	154	116	Peak
2		2390.000	35.82	30.61	66.43	-7.57	74.00	154	116	Peak
3		2417.750	95.89	30.69	126.58	N/A	N/A	154	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

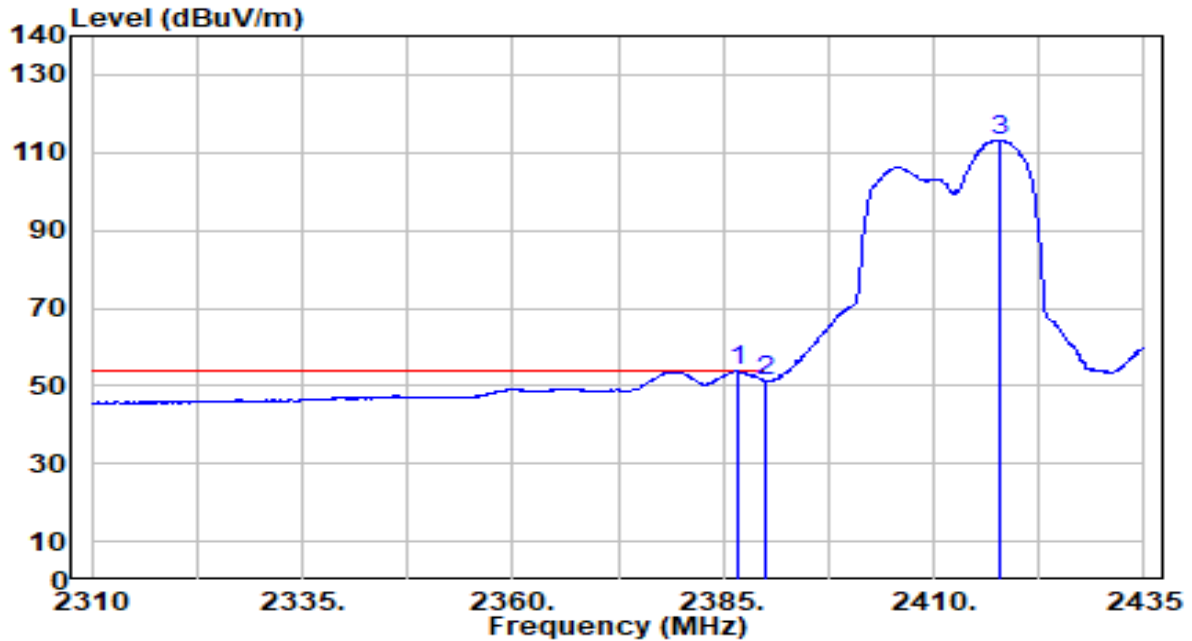


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.22	30.61	53.83	-0.17	54.00	154	116	Average
2		20.65	30.61	51.26	-2.74	54.00	154	116	Average
3		82.54	30.69	113.23	N/A	N/A	154	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

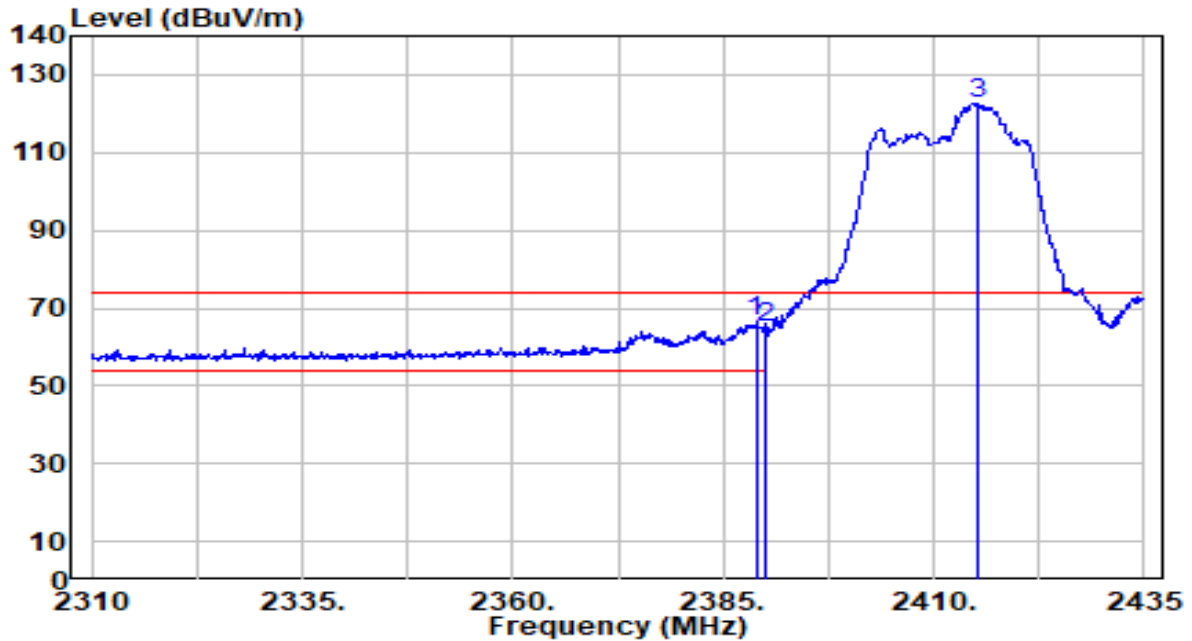


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.875	36.13	30.61	66.74	-7.26	74.00	102	173	Peak
2		2390.000	34.61	30.61	65.22	-8.78	74.00	102	173	Peak
3		2415.125	92.12	30.68	122.80	N/A	N/A	102	173	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

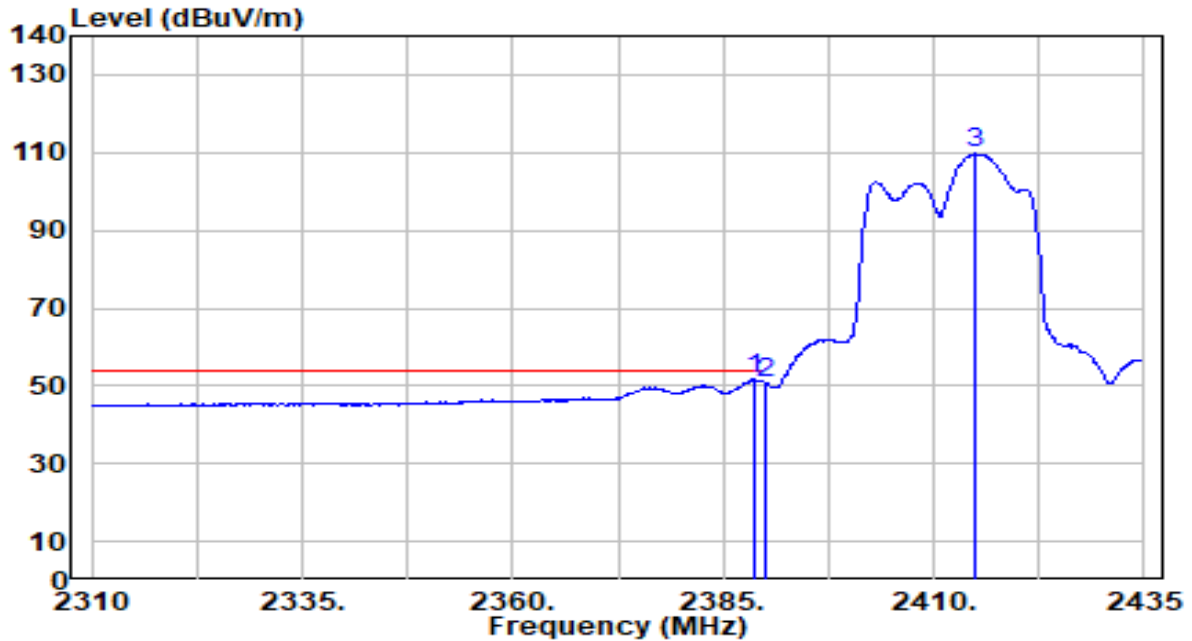


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20.96	30.61	51.57	-2.43	54.00	102	173	Average
2		20.06	30.61	50.67	-3.33	54.00	102	173	Average
3		78.97	30.68	109.65	N/A	N/A	102	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

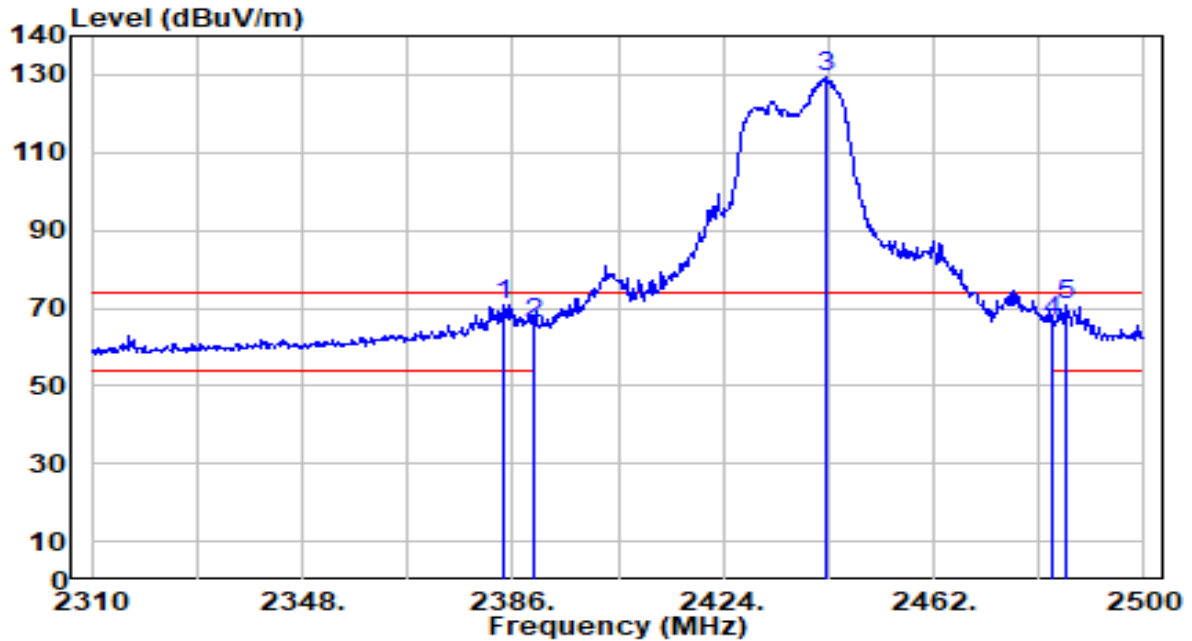


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	40.12	30.61	70.73	-3.27	74.00	154	116	Peak
2	2390.000	35.17	30.61	65.78	-8.22	74.00	154	116	Peak
3	2442.430	98.77	30.77	129.54	N/A	N/A	154	116	Peak
4	2483.500	35.41	30.91	66.33	-7.67	74.00	154	116	Peak
5	* 2486.130	39.93	30.92	70.85	-3.15	74.00	154	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

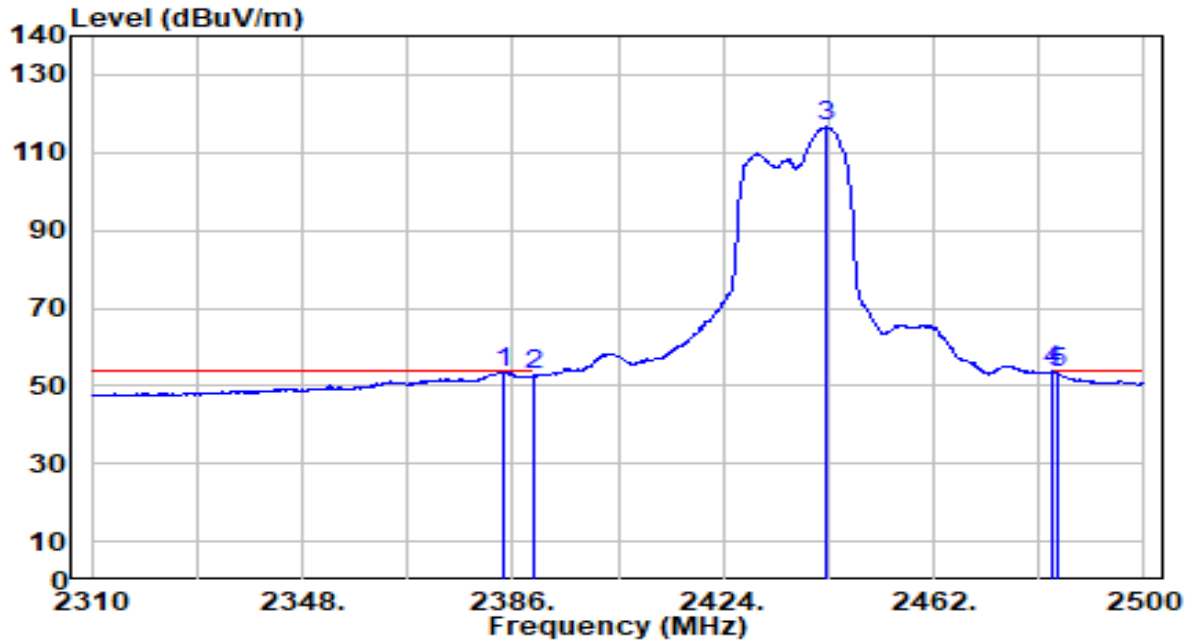


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	22.97	30.61	53.57	-0.43	54.00	154	116	Average
2	2390.000	21.98	30.61	52.60	-1.40	54.00	154	116	Average
3	2442.620	85.80	30.77	116.58	N/A	N/A	154	116	Average
4	* 2483.500	22.94	30.91	53.85	-0.15	54.00	154	116	Average
5	2484.230	22.47	30.92	53.39	-0.61	54.00	154	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

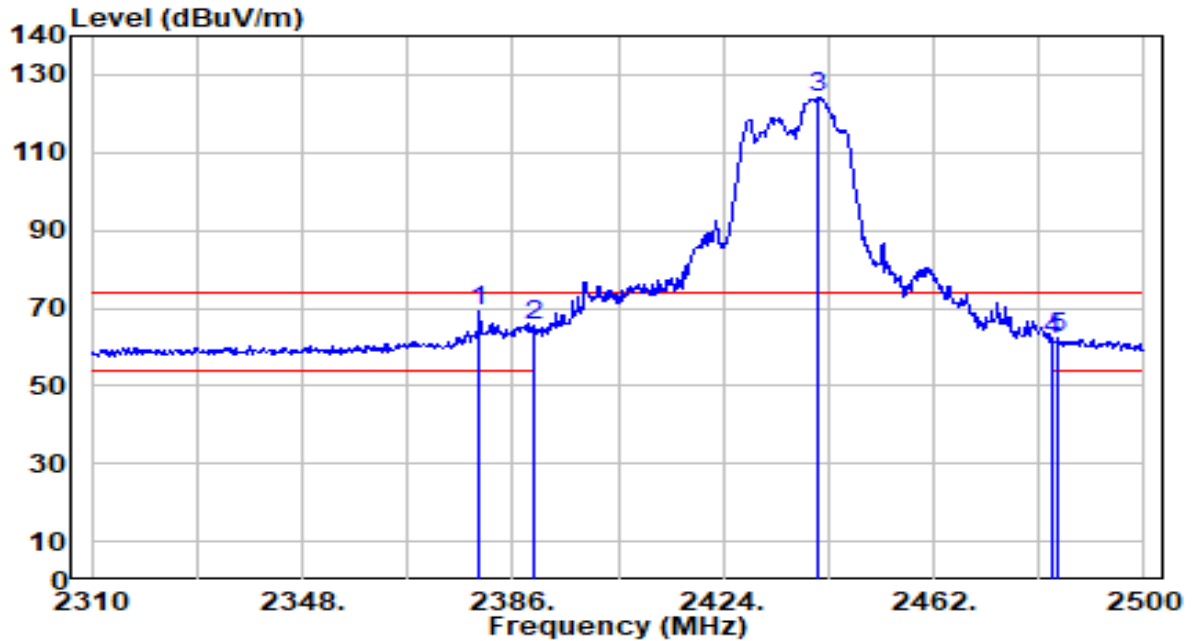


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2379.920	38.48	30.60	69.08	-4.92	74.00	100	176	Peak
2	2390.000	35.14	30.61	65.76	-8.24	74.00	100	176	Peak
3	2441.290	93.47	30.77	124.24	N/A	N/A	100	176	Peak
4	2483.500	30.79	30.91	61.71	-12.29	74.00	100	176	Peak
5	2484.610	31.27	30.92	62.19	-11.81	74.00	100	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

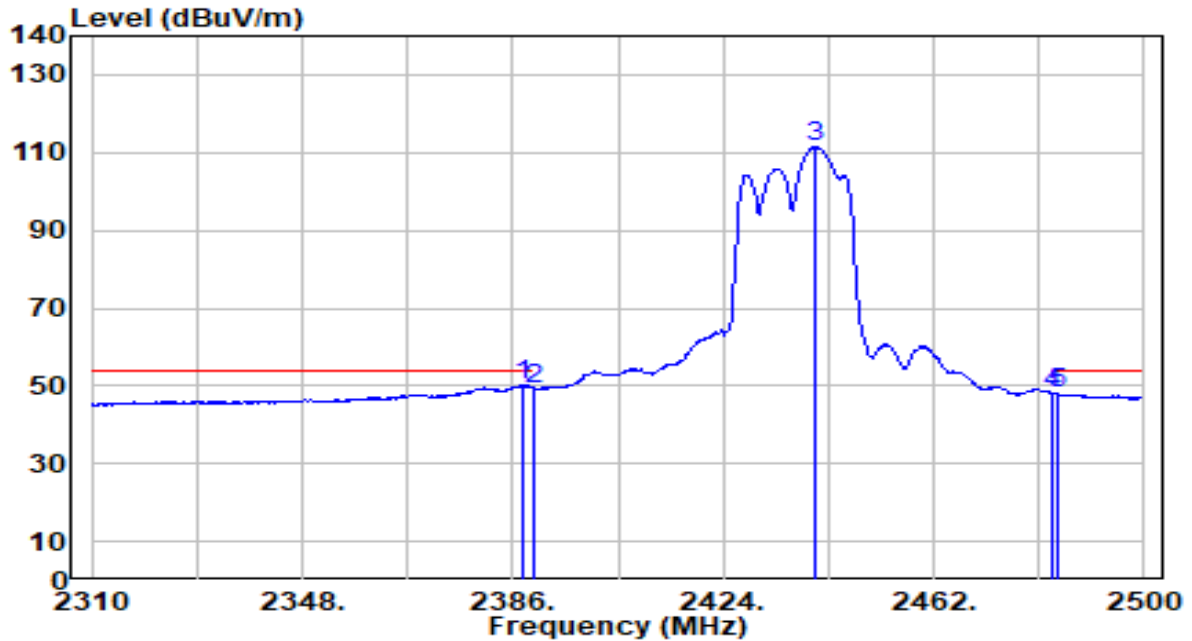


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.710	19.49	30.61	50.11	-3.89	54.00	100	176	Average
2	2390.000	18.70	30.61	49.31	-4.69	54.00	100	176	Average
3	2440.530	80.58	30.77	111.34	N/A	N/A	100	176	Average
4	2483.500	17.28	30.91	48.19	-5.81	54.00	100	176	Average
5	2484.230	17.03	30.92	47.95	-6.05	54.00	100	176	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

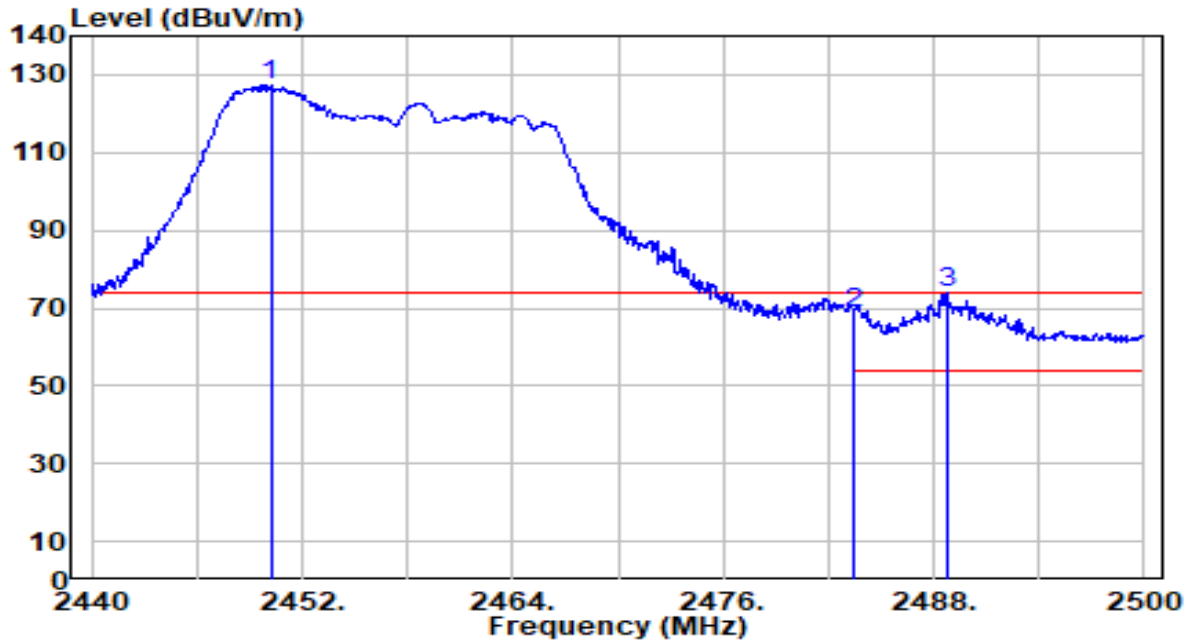


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.200	96.67	30.80	127.47	N/A	N/A	152	117	Peak
2	2483.500	37.79	30.91	68.71	-5.29	74.00	152	117	Peak
3	* 2488.720	42.83	30.93	73.76	-0.24	74.00	152	117	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

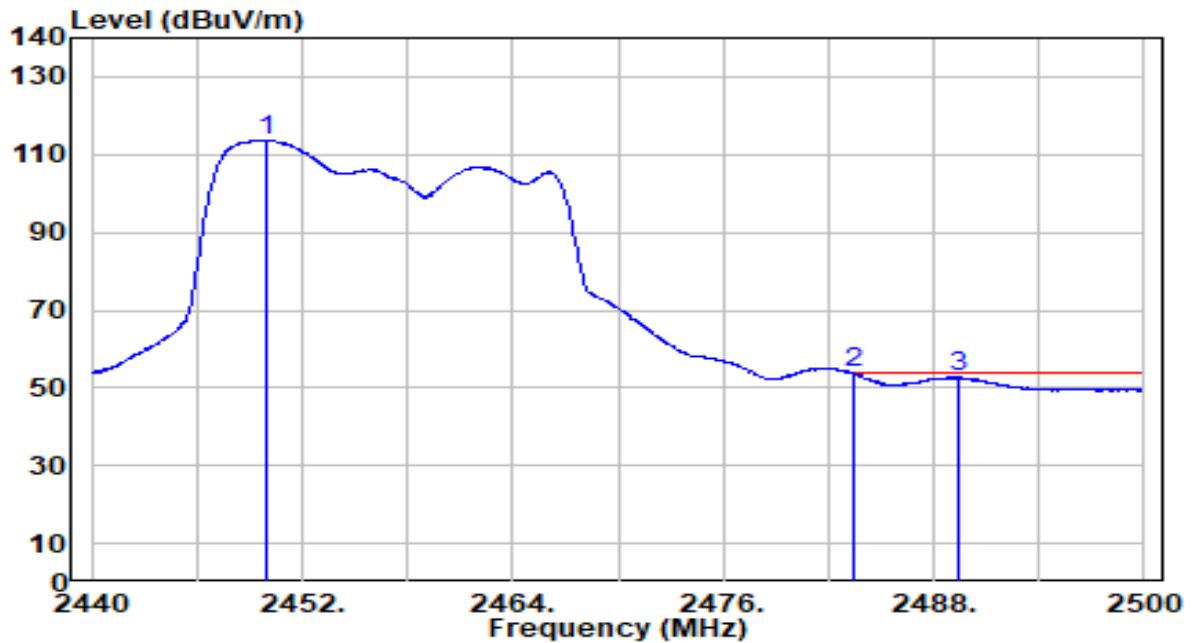


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.020	82.98	30.80	113.77	N/A	N/A	152	117	Average
2	* 2483.500	22.94	30.91	53.86	-0.14	54.00	152	117	Average
3	2489.380	21.84	30.93	52.78	-1.22	54.00	152	117	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

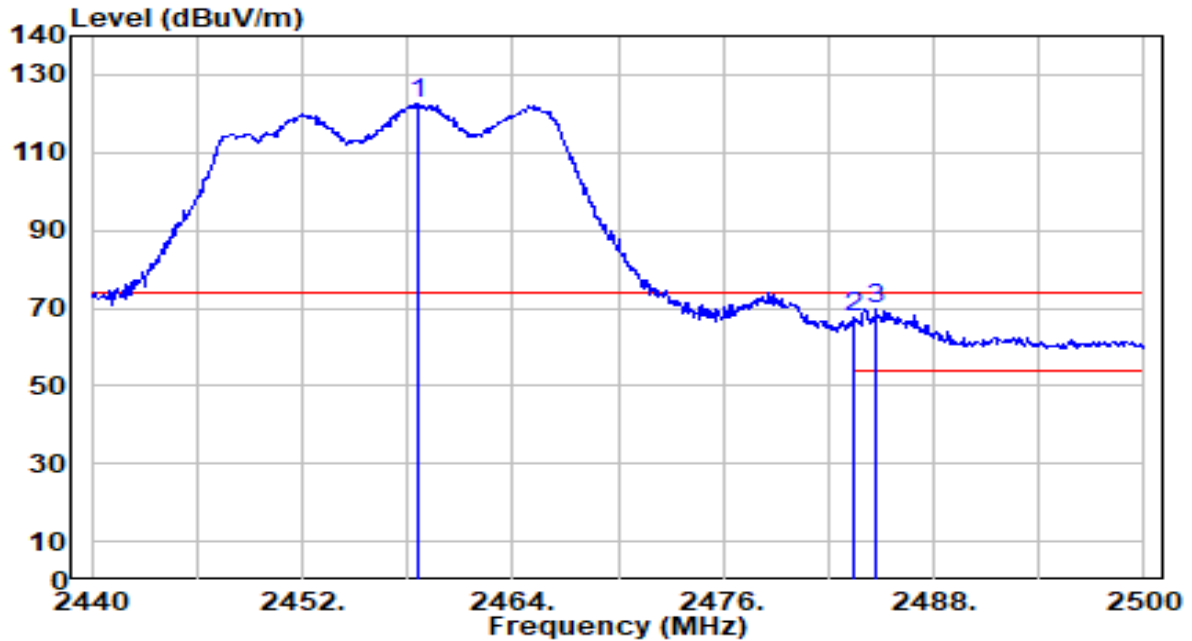


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.660	91.82	30.83	122.65	N/A	N/A	114	204	Peak
2	2483.500	36.47	30.91	67.38	-6.62	74.00	114	204	Peak
3	* 2484.700	38.98	30.92	69.90	-4.10	74.00	114	204	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

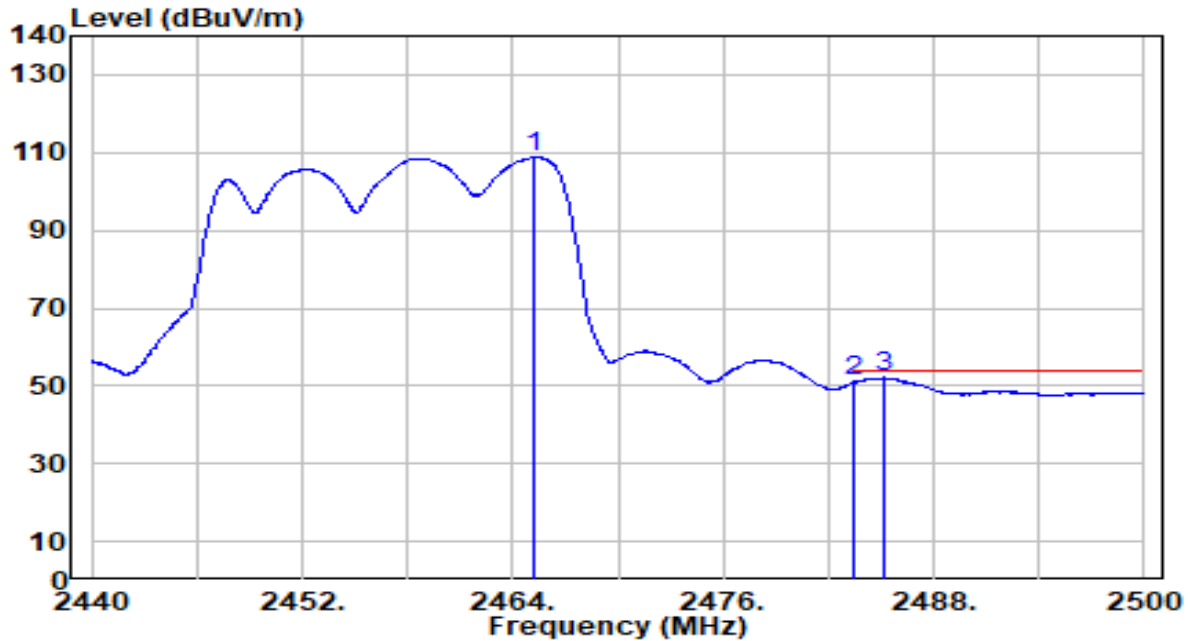


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.260	77.92	30.85	108.77	N/A	N/A	114	204	Average
2	2483.500	20.10	30.91	51.01	-2.99	54.00	114	204	Average
3	* 2485.120	21.16	30.92	52.07	-1.93	54.00	114	204	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

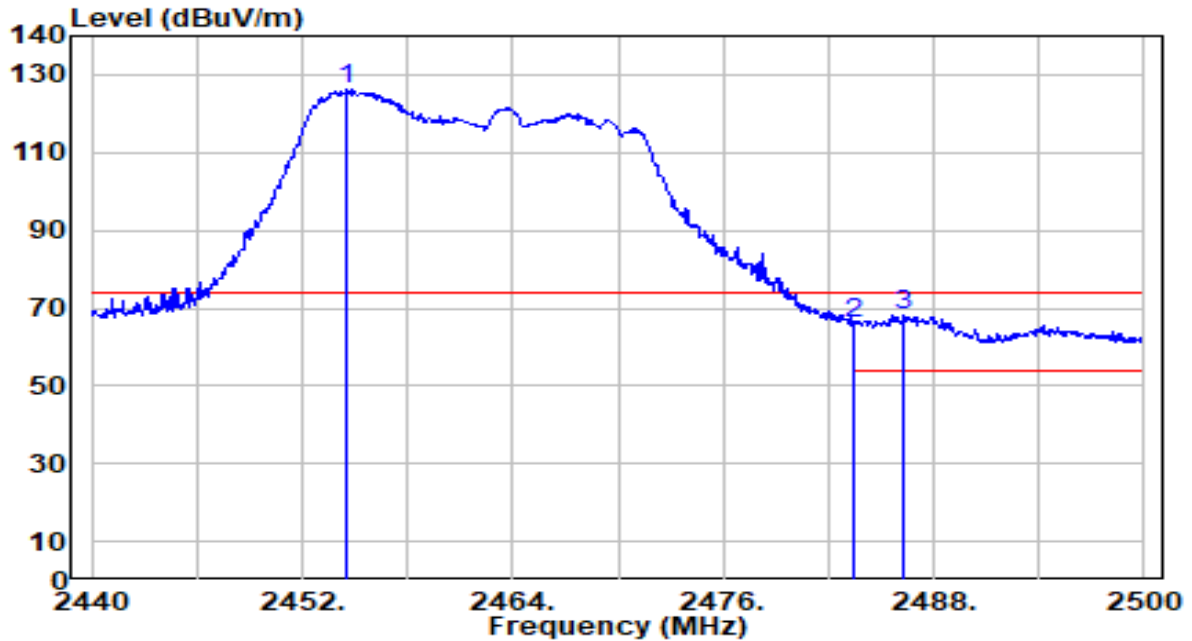


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.580	95.54	30.81	126.35	N/A	N/A	154	116	Peak
2	2483.500	35.06	30.91	65.97	-8.03	74.00	154	116	Peak
3	* 2486.260	37.41	30.92	68.33	-5.67	74.00	154	116	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

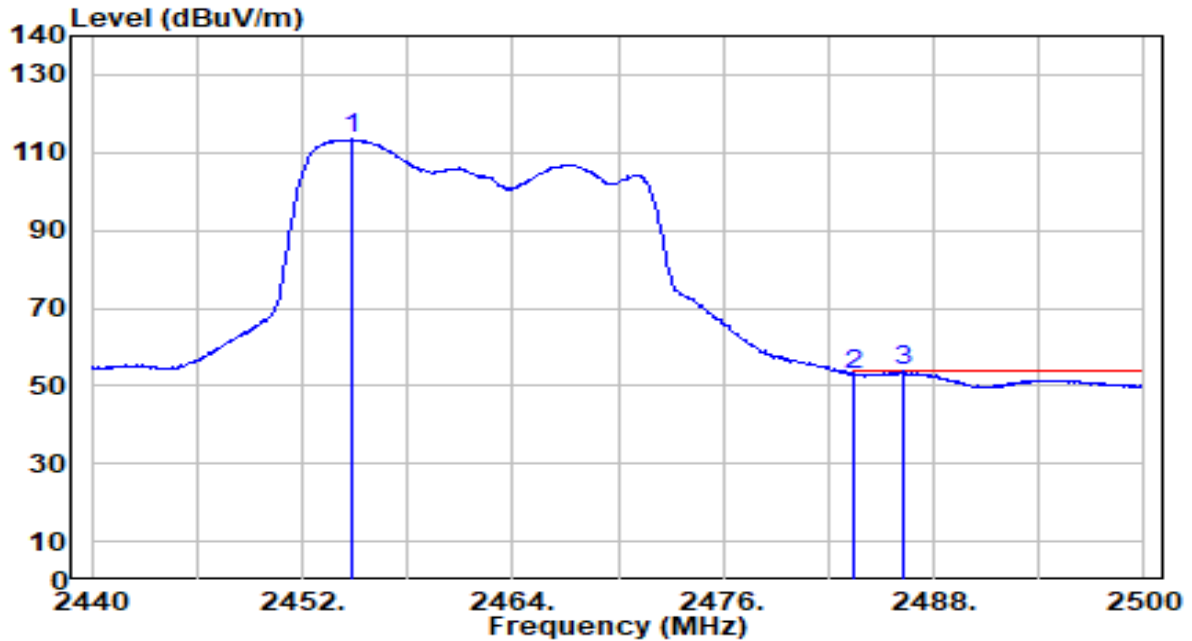


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.880	82.52	30.82	113.34	N/A	N/A	154	116	Average
2	2483.500	22.01	30.91	52.92	-1.08	54.00	154	116	Average
3	* 2486.320	22.91	30.92	53.83	-0.17	54.00	154	116	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

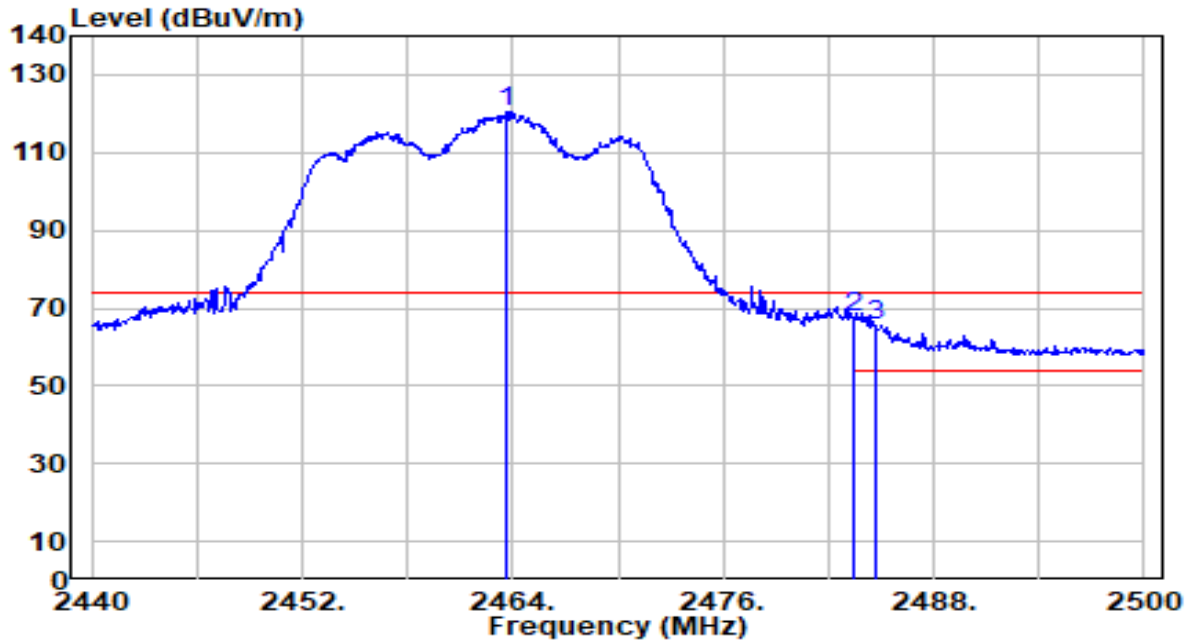


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.700	89.85	30.85	120.69	N/A	N/A	191	153	Peak
2	* 2483.500	36.61	30.91	67.53	-6.47	74.00	191	153	Peak
3	2484.640	34.81	30.92	65.73	-8.27	74.00	191	153	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

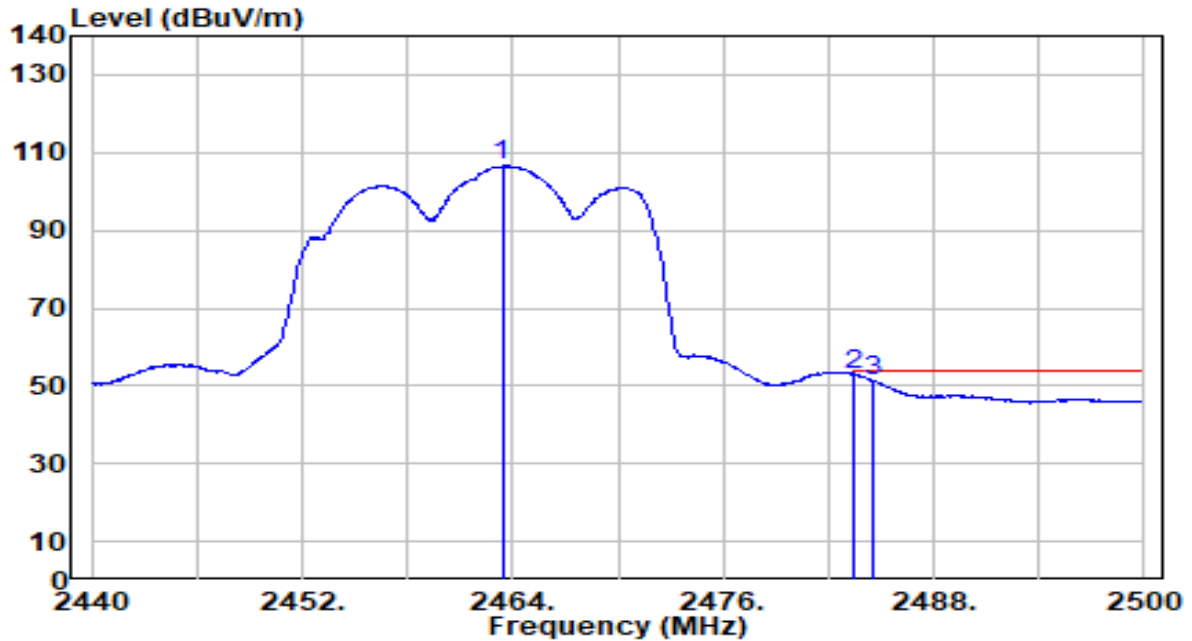


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.400	75.77	30.84	106.62	N/A	N/A	191	153	Average
2	* 2483.500	21.95	30.91	52.86	-1.14	54.00	191	153	Average
3	2484.520	20.49	30.92	51.41	-2.59	54.00	191	153	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

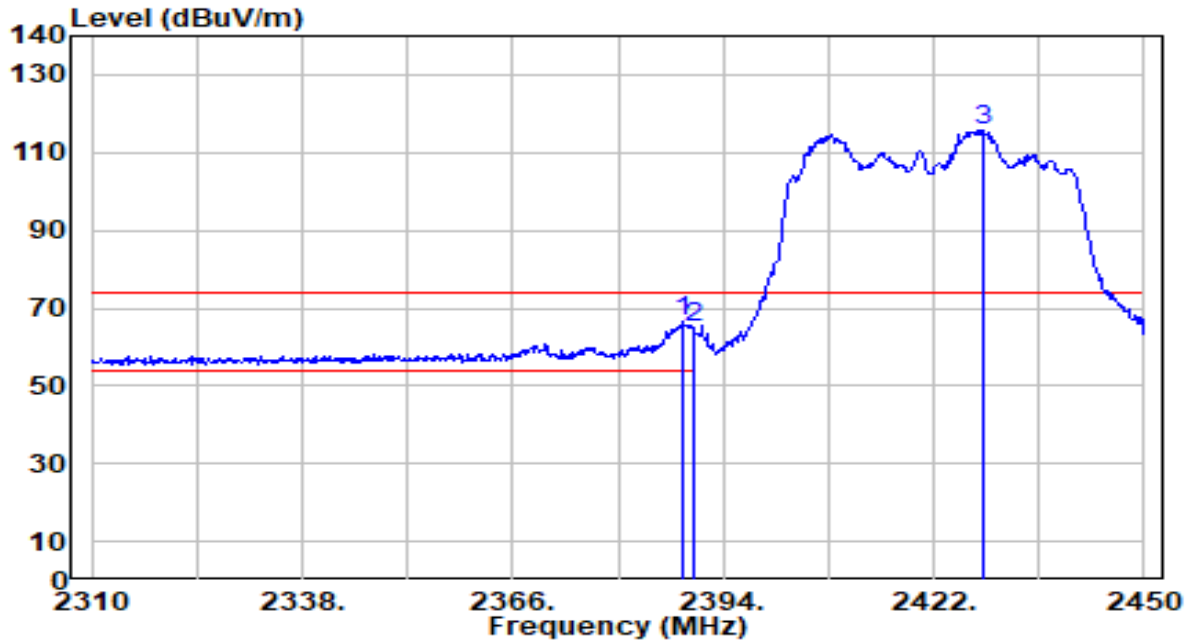


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.540	35.94	30.61	66.55	-7.45	74.00	154	116	Peak
2	2390.000	34.17	30.61	64.79	-9.21	74.00	154	116	Peak
3	2428.580	85.06	30.73	115.79	N/A	N/A	154	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

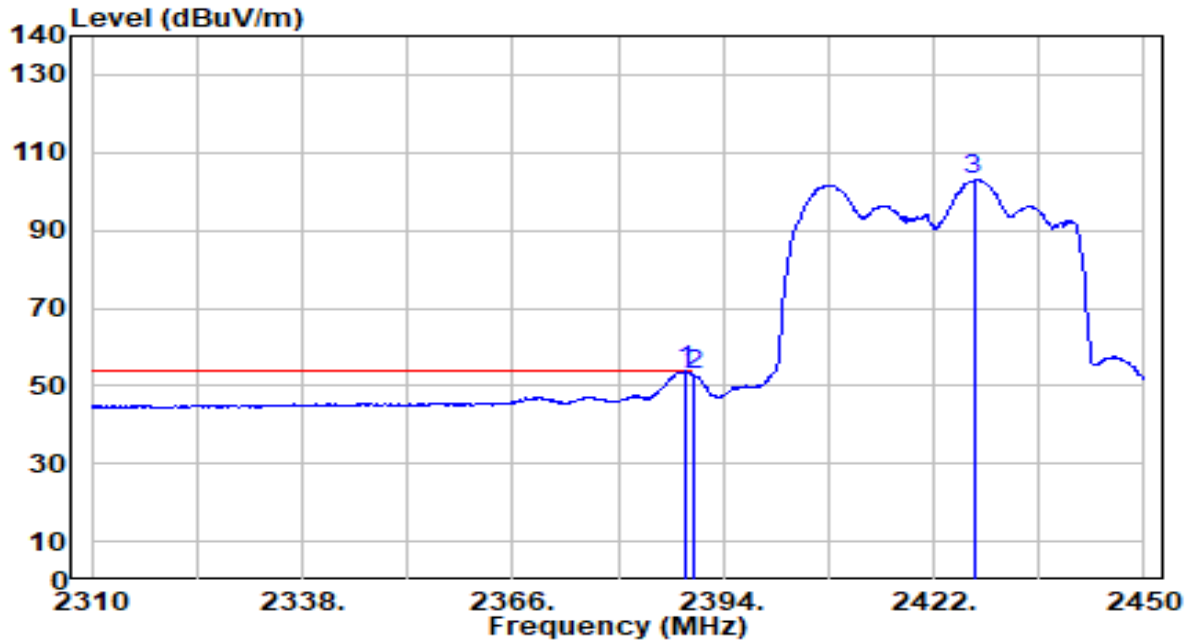


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.20	30.61	53.81	-0.19	54.00	154	116	Average
2		22.18	30.61	52.80	-1.20	54.00	154	116	Average
3		72.21	30.72	102.94	N/A	N/A	154	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

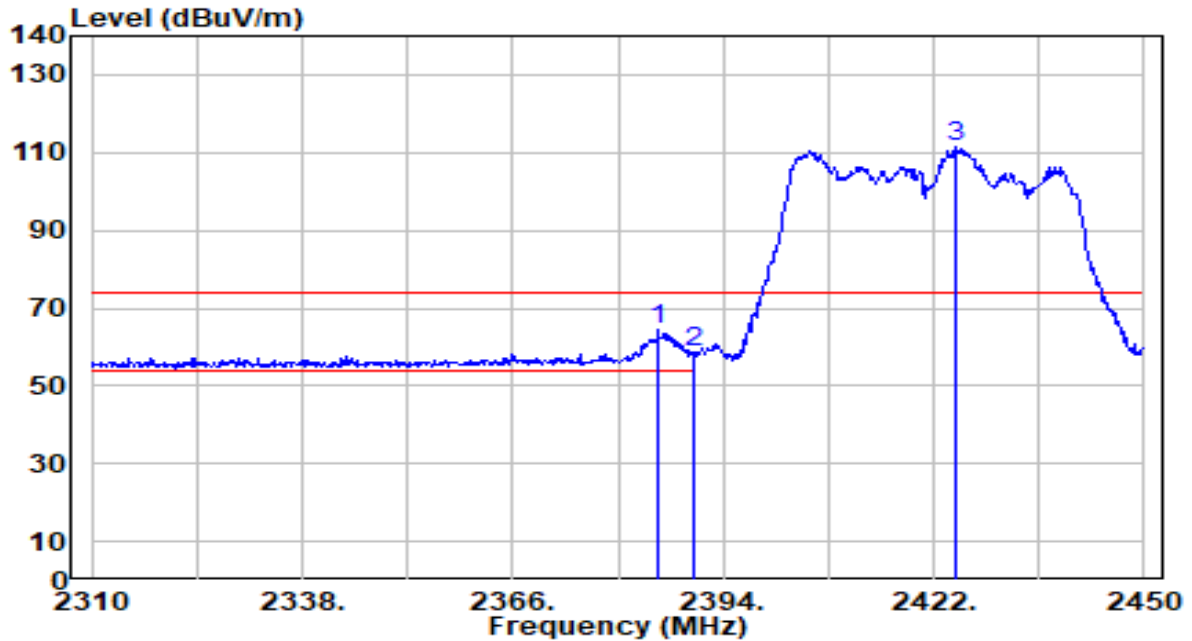


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.320	34.04	30.61	64.65	-9.35	74.00	100	173	Peak
2		2390.000	27.81	30.61	58.42	-15.58	74.00	100	173	Peak
3		2424.940	80.69	30.71	111.40	N/A	N/A	100	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

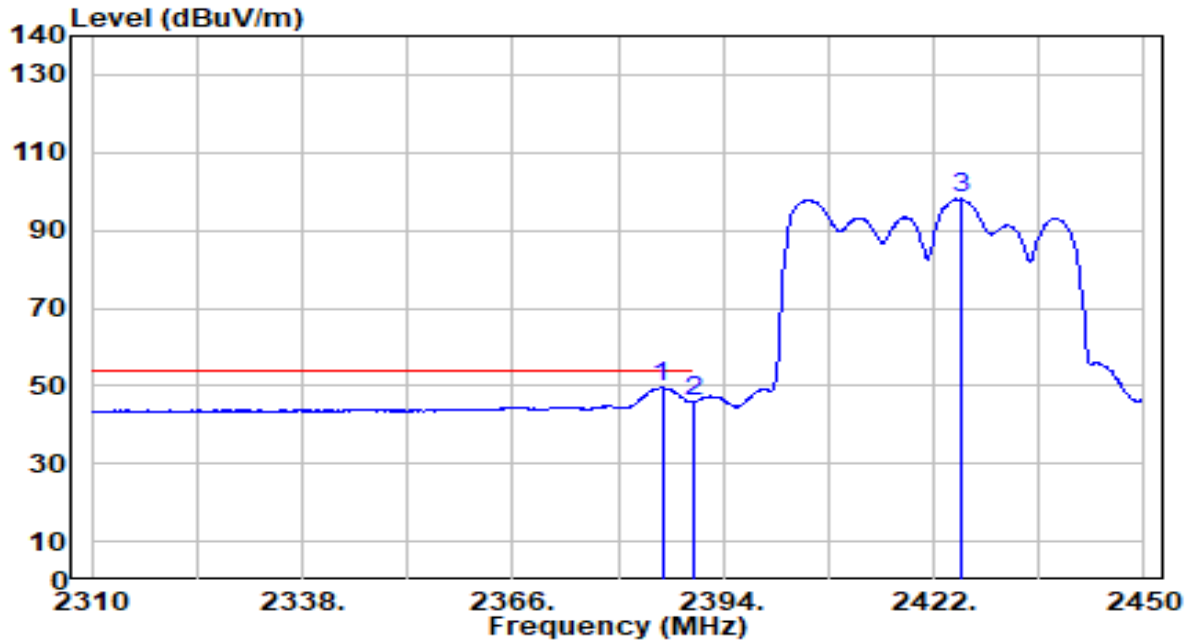


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.880	18.99	30.61	49.60	-4.40	54.00	100	173	Average
2		2390.000	15.31	30.61	45.93	-8.07	54.00	100	173	Average
3		2425.500	67.32	30.72	98.04	N/A	N/A	100	173	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

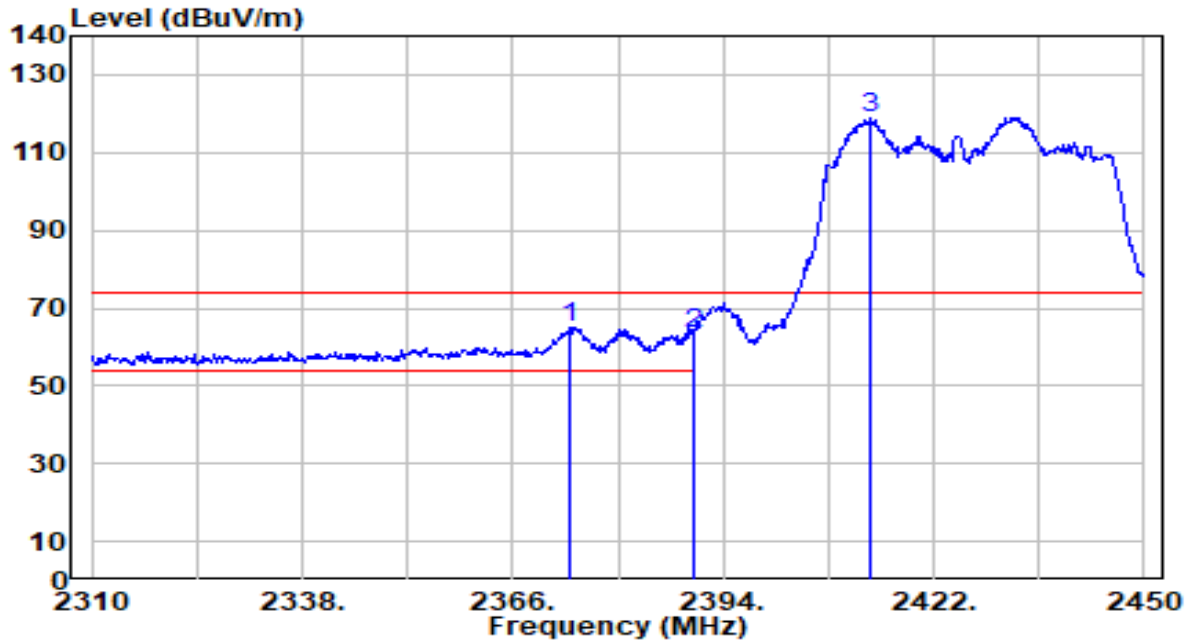


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2373.700	34.45	30.59	65.04	-8.96	74.00	154	116	Peak
2	2390.000	32.91	30.61	63.52	-10.48	74.00	154	116	Peak
3	2413.460	88.31	30.67	118.99	N/A	N/A	154	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

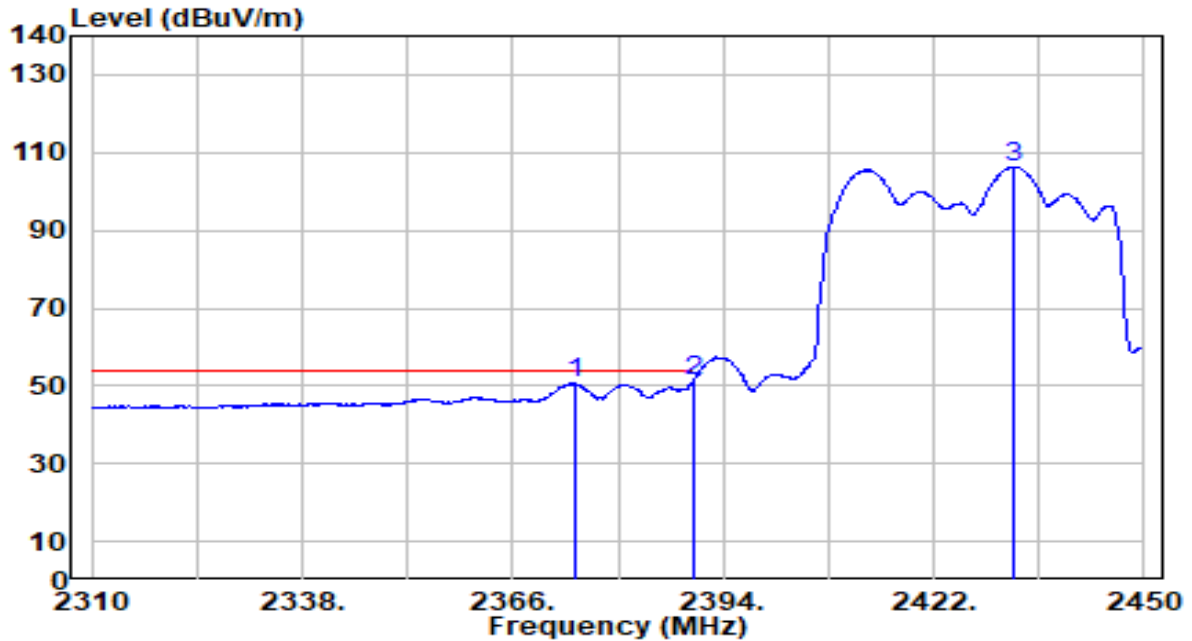


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2374.400	19.90	30.59	50.49	-3.51	54.00	154	116	Average
2	* 2390.000	20.64	30.61	51.26	-2.74	54.00	154	116	Average
3	2432.500	75.60	30.74	106.34	N/A	N/A	154	116	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

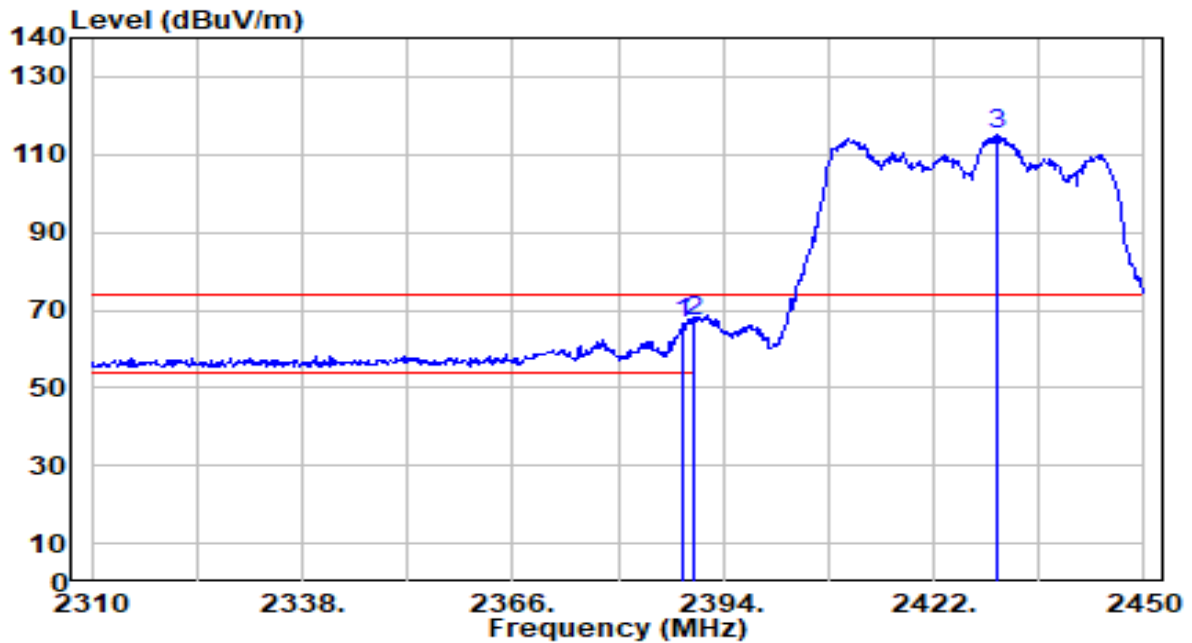


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.540	35.83	30.61	66.45	-7.55	74.00	100	175	Peak
2	* 2390.000	36.28	30.61	66.90	-7.10	74.00	100	175	Peak
3	2430.400	84.47	30.73	115.20	N/A	N/A	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 4_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

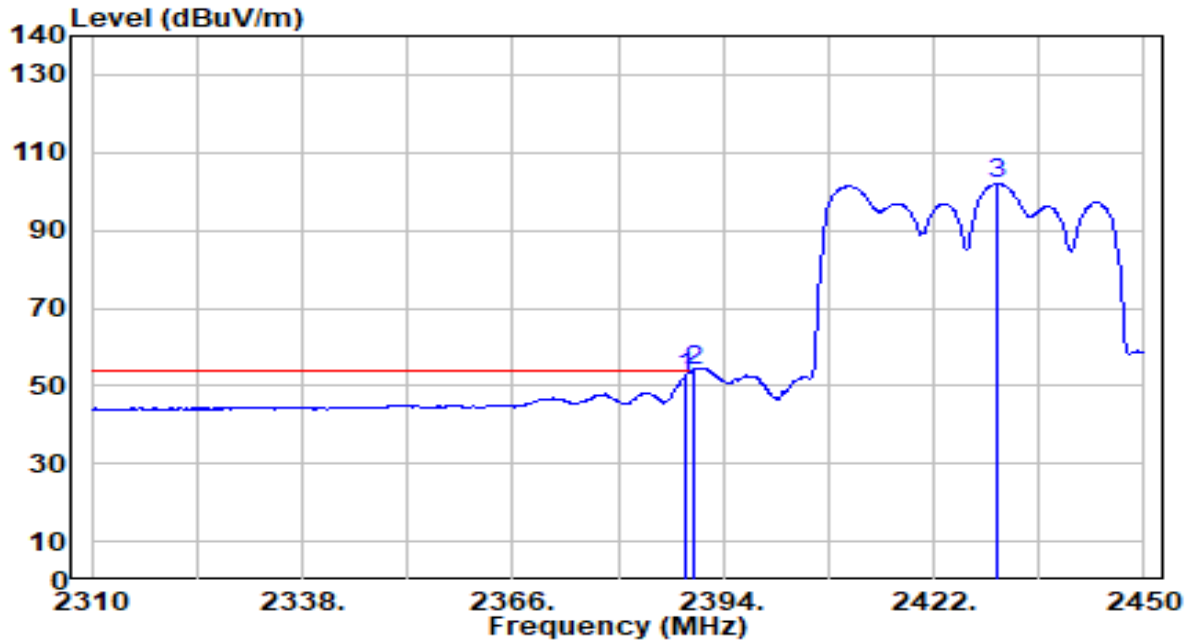


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	21.91	30.61	52.52	-1.48	54.00	100	175	Average
2	* 2390.000	23.31	30.61	53.92	-0.08	54.00	100	175	Average
3	2430.400	71.25	30.73	101.99	N/A	N/A	100	175	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

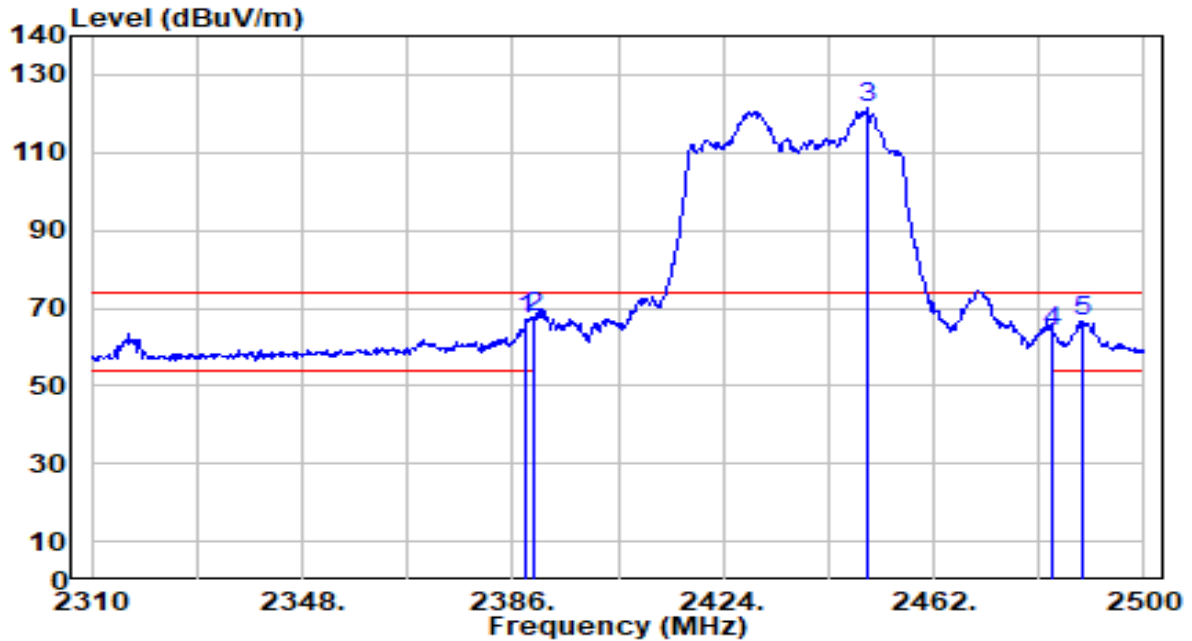


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	36.63	30.61	67.24	-6.76	74.00	154	118	Peak
2	* 2390.000	36.99	30.61	67.60	-6.40	74.00	154	118	Peak
3	2449.840	90.76	30.80	121.56	N/A	N/A	154	118	Peak
4	2483.500	32.85	30.91	63.76	-10.24	74.00	154	118	Peak
5	2488.980	35.58	30.93	66.52	-7.48	74.00	154	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

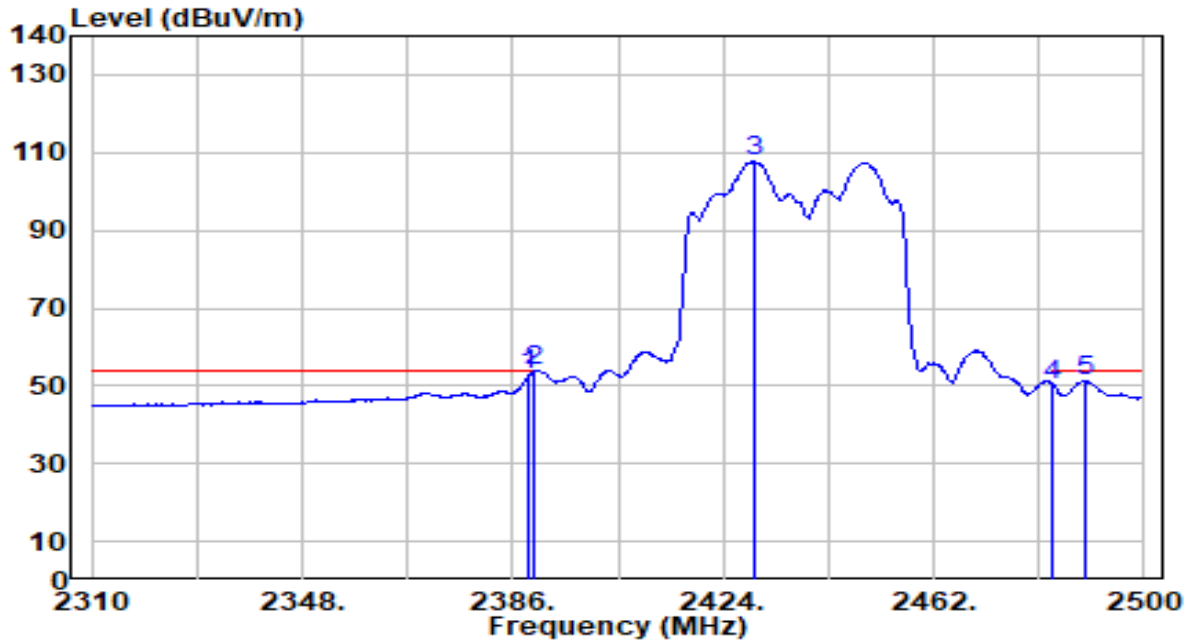


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	22.06	30.61	52.67	-1.33	54.00	154	118	Average
2	* 2390.000	23.27	30.61	53.88	-0.12	54.00	154	118	Average
3	2429.510	76.99	30.73	107.72	N/A	N/A	154	118	Average
4	2483.500	19.54	30.91	50.45	-3.55	54.00	154	118	Average
5	2489.360	20.19	30.93	51.12	-2.88	54.00	154	118	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

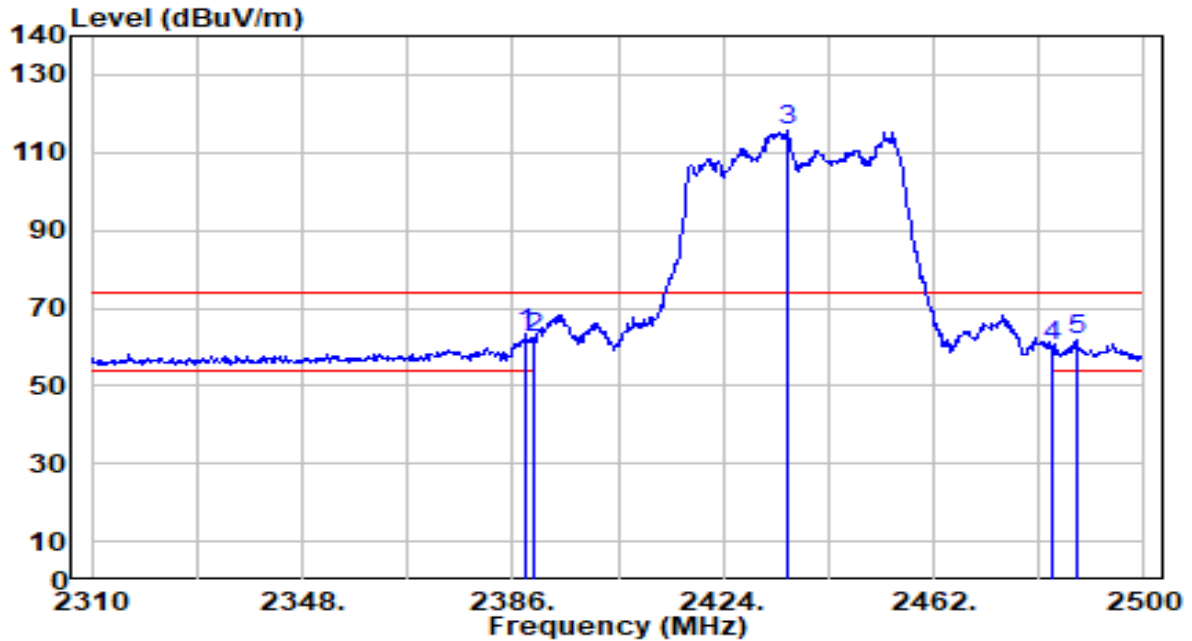


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	33.04	30.61	63.65	-10.35	74.00	100	177	Peak
2	2390.000	31.79	30.61	62.40	-11.60	74.00	100	177	Peak
3	2435.400	85.09	30.75	115.84	N/A	N/A	100	177	Peak
4	2483.500	29.53	30.91	60.44	-13.56	74.00	100	177	Peak
5	* 2487.650	30.99	30.93	61.91	-12.09	74.00	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

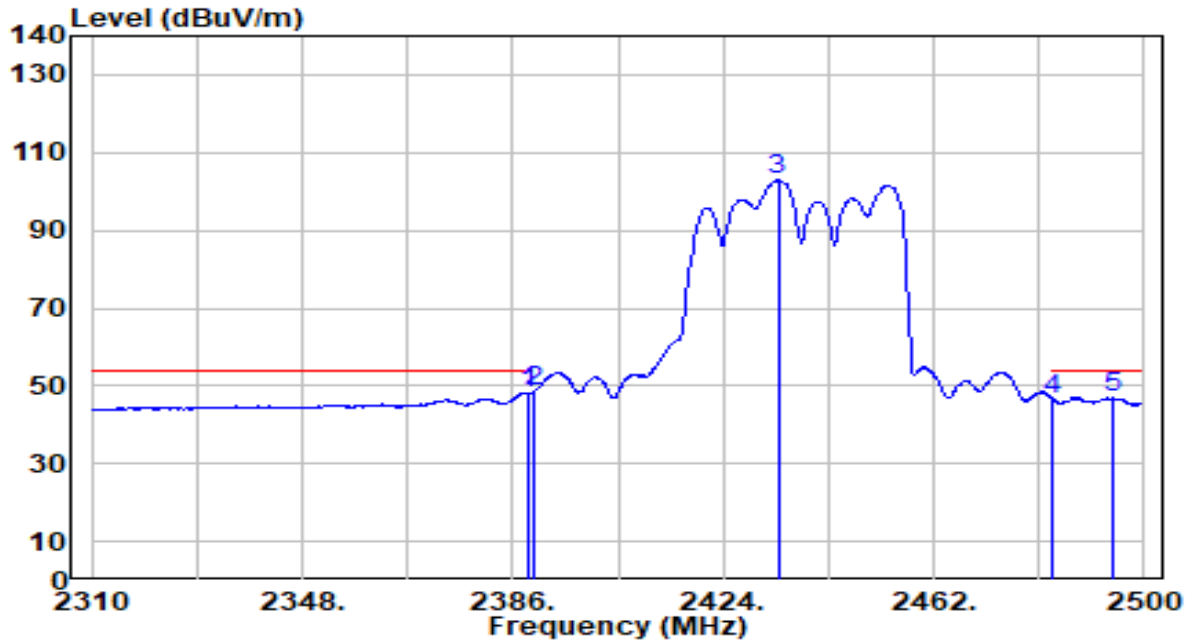


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	17.56	30.61	48.17	-5.83	54.00	100	177	Average
2	* 2390.000	17.90	30.61	48.51	-5.49	54.00	100	177	Average
3	2433.880	72.16	30.74	102.90	N/A	N/A	100	177	Average
4	2483.500	15.59	30.91	46.51	-7.49	54.00	100	177	Average
5	2494.300	15.99	30.95	46.94	-7.06	54.00	100	177	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

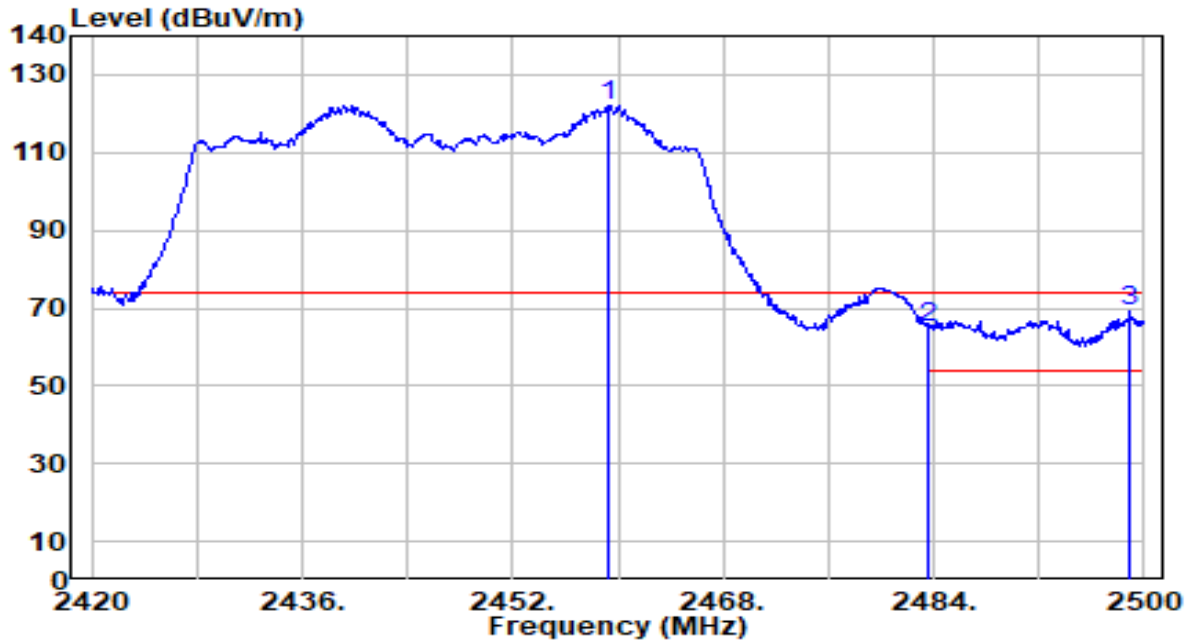


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.280	91.44	30.83	122.27	N/A	N/A	154	116	Peak
2	2483.500	33.83	30.91	64.74	-9.26	74.00	154	116	Peak
3	* 2498.960	38.03	30.97	68.99	-5.01	74.00	154	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

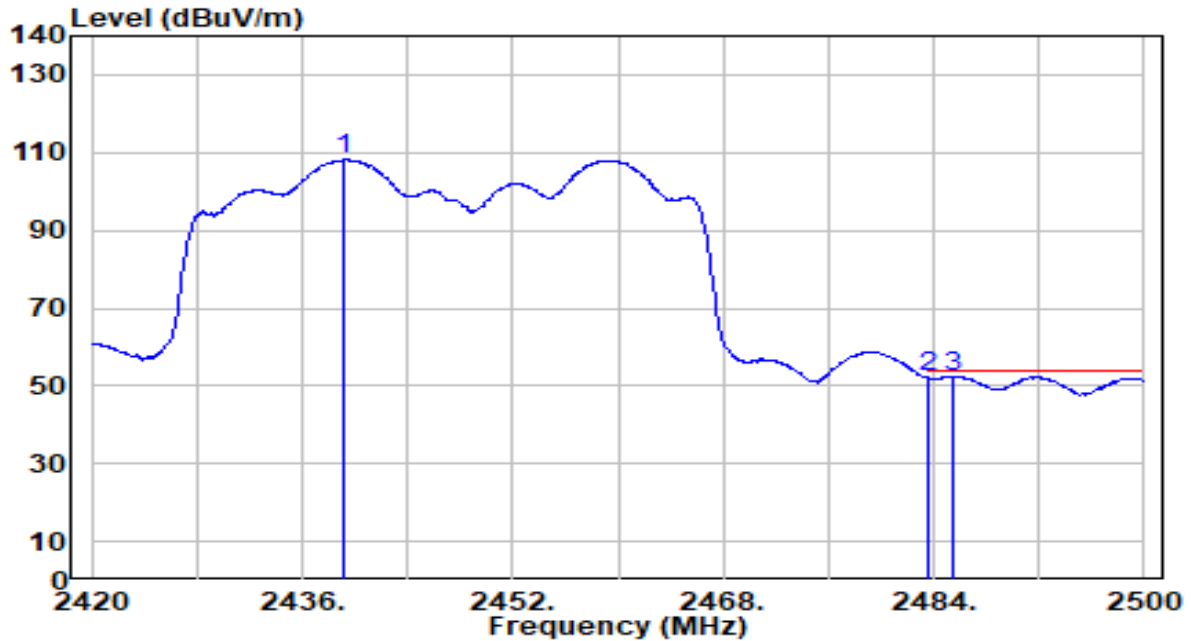


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2439.200	77.52	30.76	108.28	N/A	N/A	154	116	Average
2	2483.500	21.19	30.91	52.11	-1.89	54.00	154	116	Average
3	* 2485.440	21.56	30.92	52.48	-1.52	54.00	154	116	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

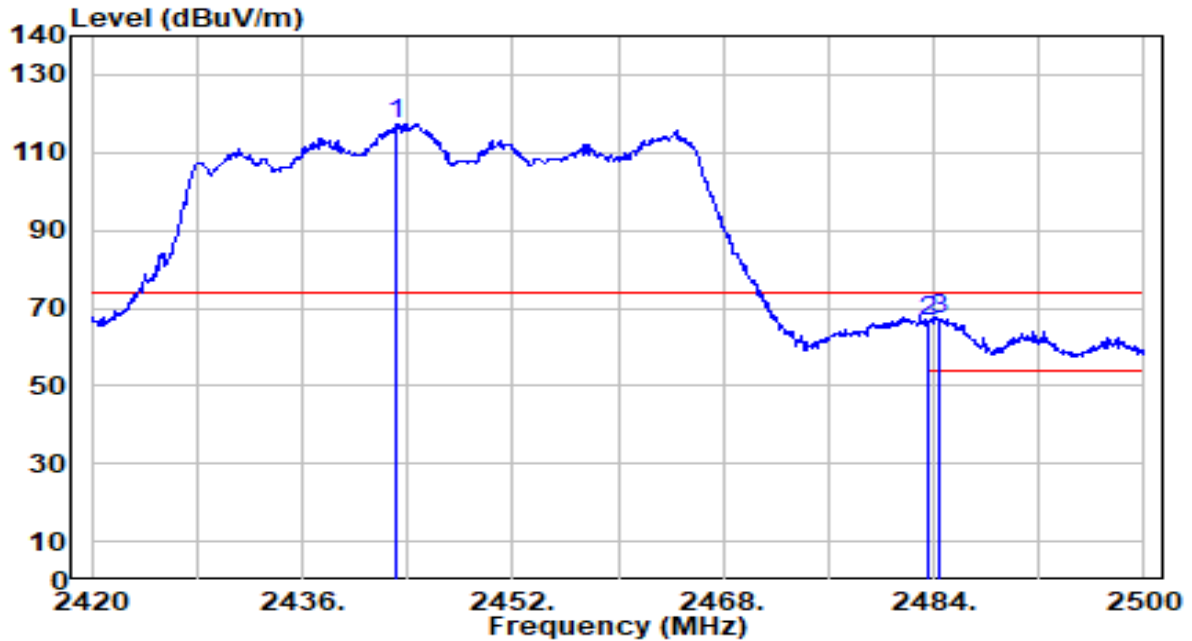


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.200	86.65	30.78	117.42	N/A	N/A	100	177	Peak
2	2483.500	35.62	30.91	66.53	-7.47	74.00	100	177	Peak
3	* 2484.480	36.37	30.92	67.29	-6.71	74.00	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

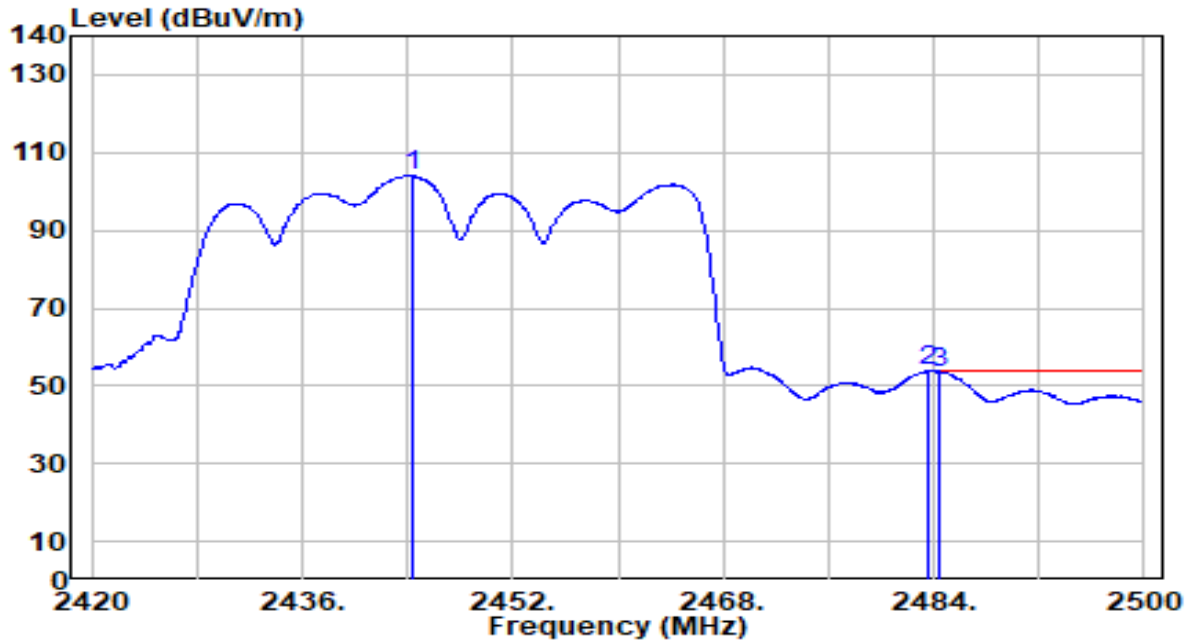


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2444.320	73.28	30.78	104.06	N/A	N/A	100	177	Average
2	* 2483.500	22.96	30.91	53.87	-0.13	54.00	100	177	Average
3	2484.480	22.70	30.92	53.62	-0.38	54.00	100	177	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

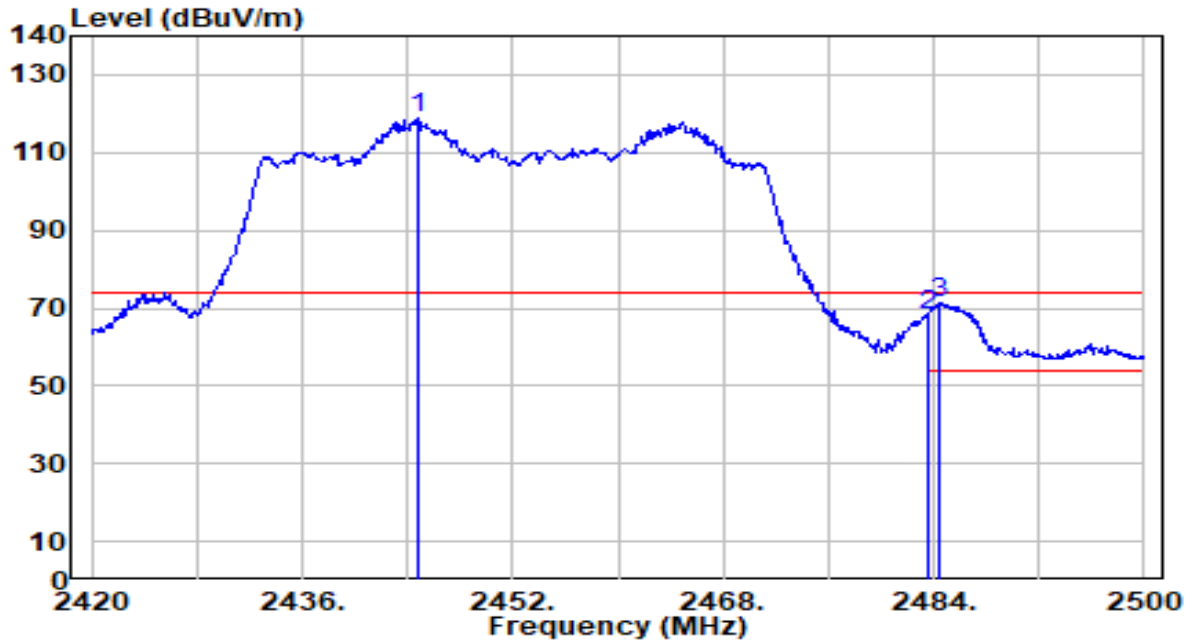


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2444.720	88.06	30.78	118.84	N/A	N/A	154	118	Peak
2	2483.500	37.43	30.91	68.35	-5.65	74.00	154	118	Peak
3	* 2484.480	40.35	30.92	71.27	-2.73	74.00	154	118	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

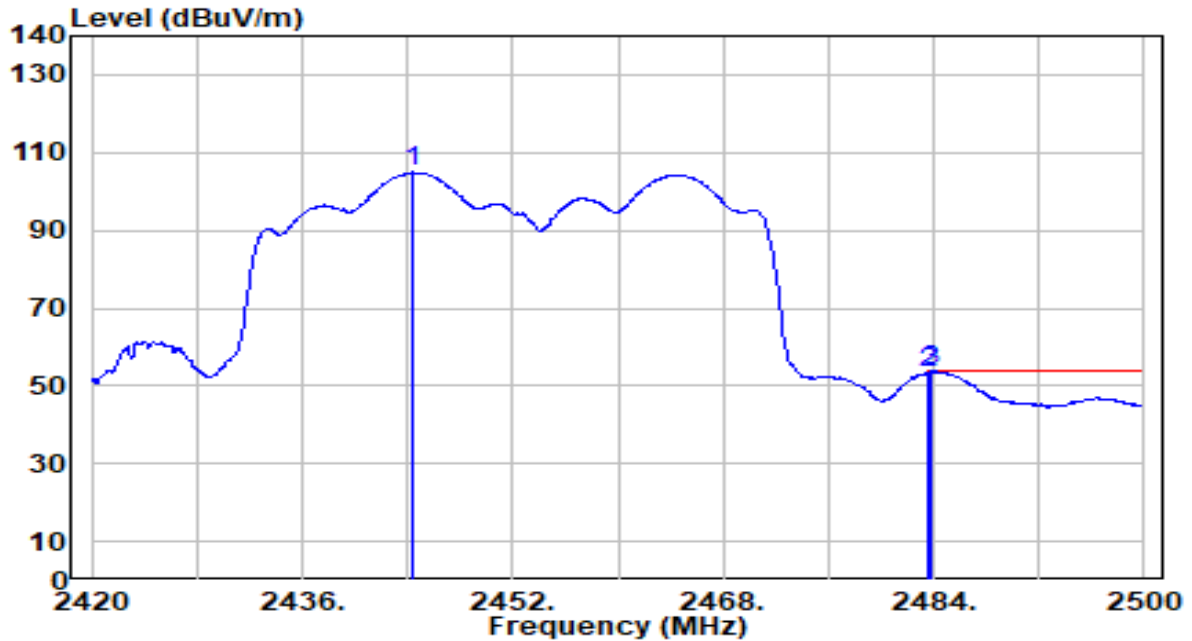


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2444.320	74.10	30.78	104.88	N/A	N/A	154	118	Average
2	2483.500	22.37	30.91	53.28	-0.72	54.00	154	118	Average
3	* 2483.840	22.92	30.91	53.83	-0.17	54.00	154	118	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

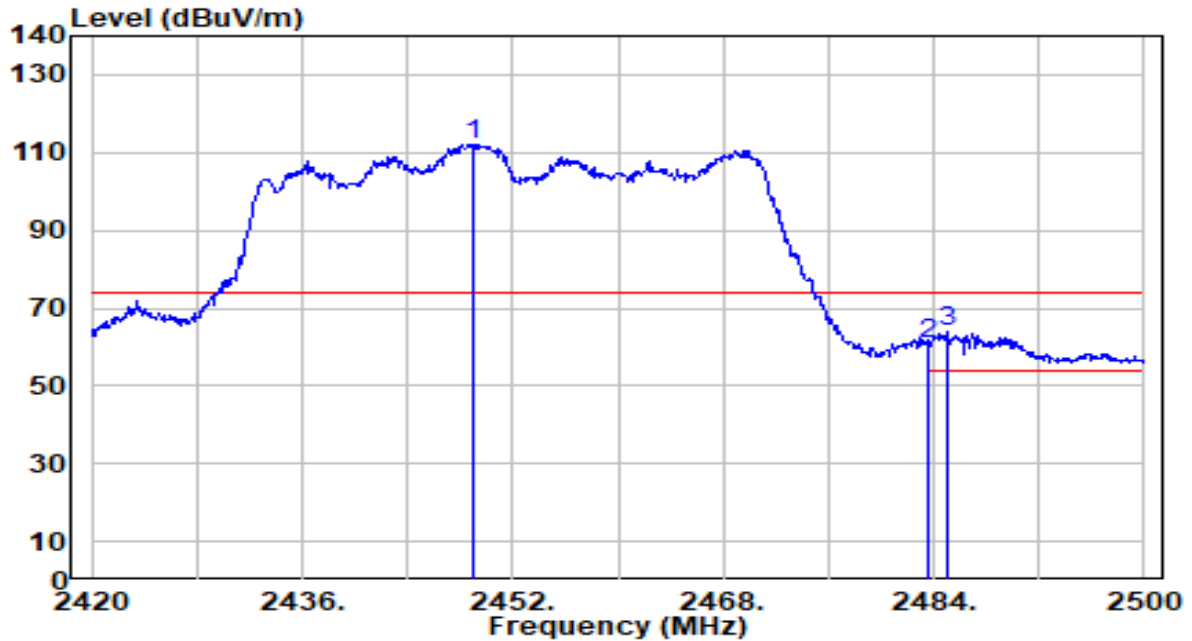


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.960	81.46	30.80	112.25	N/A	N/A	100	178	Peak
2	2483.500	29.65	30.91	60.57	-13.43	74.00	100	178	Peak
3	* 2485.040	32.93	30.92	63.85	-10.15	74.00	100	178	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-15
Factor	DRH18-E	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

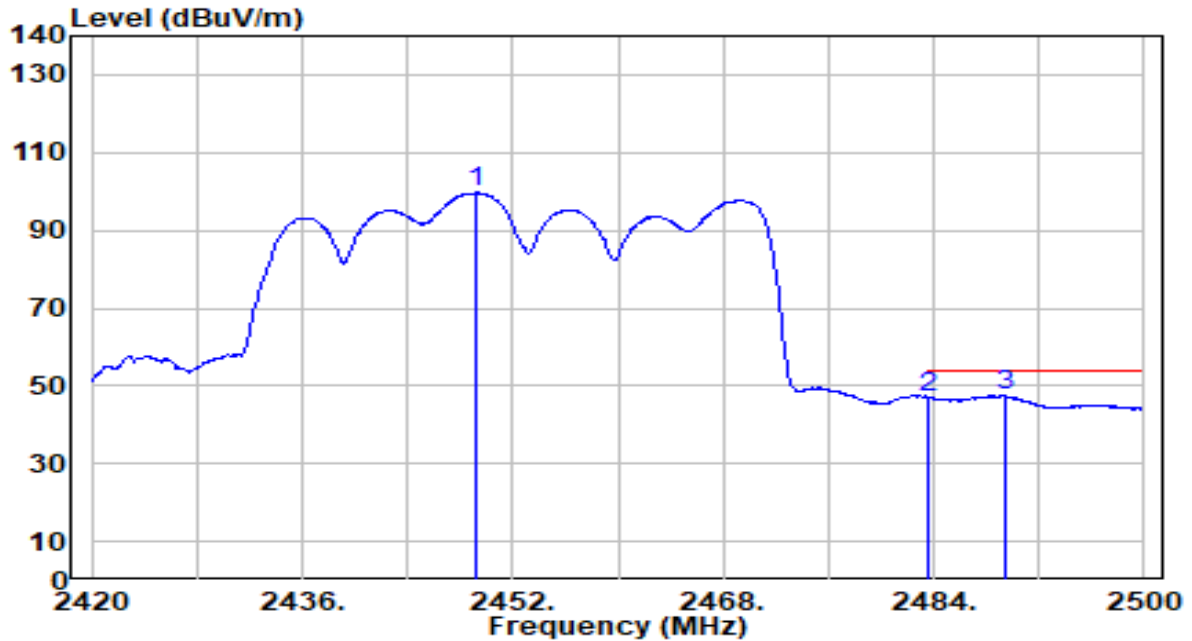

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.200	68.80	30.80	99.59	N/A	N/A	100	178	Average
2	2483.500	16.25	30.91	47.16	-6.84	54.00	100	178	Average
3	* 2489.360	16.62	30.93	47.56	-6.44	54.00	100	178	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

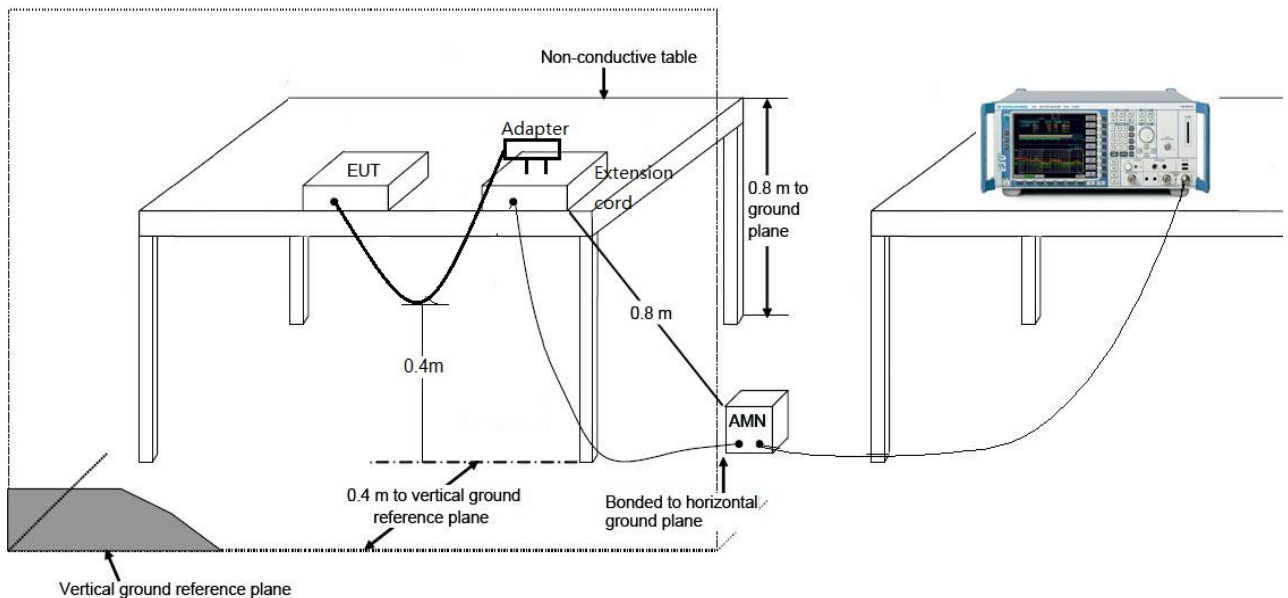

7.8.3. Test Result

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.0°C /61%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

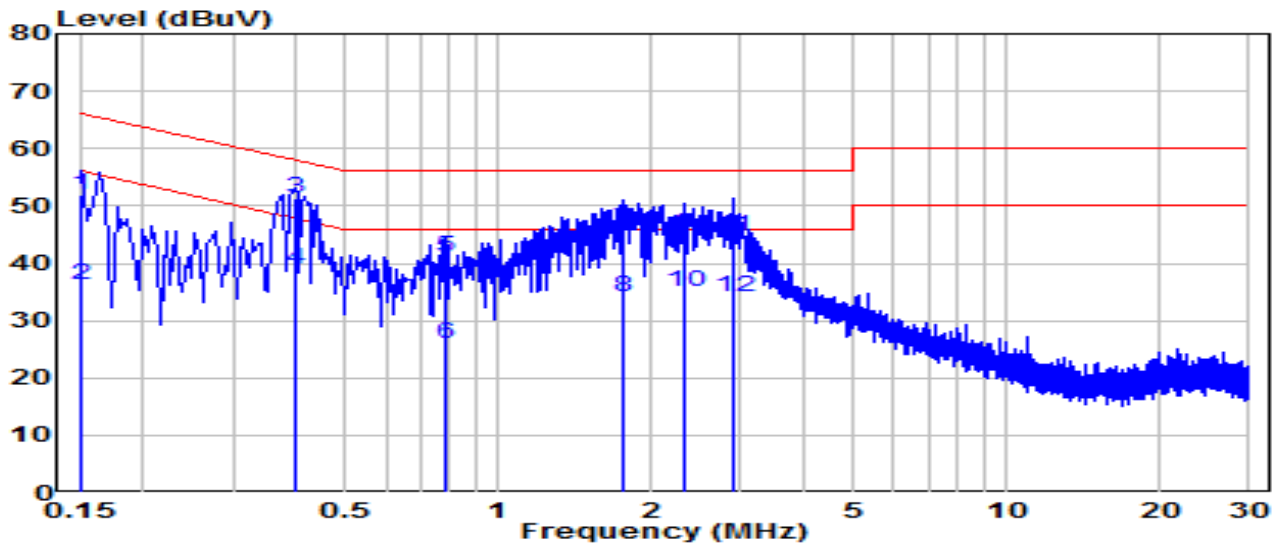


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.150	42.26	9.62	51.88	-14.12	66.00	QP
2	0.150	26.47	9.62	36.09	-19.91	56.00	Average
3	* 0.397	41.60	9.63	51.23	-6.67	57.91	QP
4	* 0.397	29.27	9.63	38.90	-9.00	47.91	Average
5	0.784	31.50	9.66	41.16	-14.84	56.00	QP
6	0.784	16.23	9.66	25.89	-20.11	46.00	Average
7	1.756	36.08	9.69	45.76	-10.24	56.00	QP
8	1.756	24.47	9.69	34.16	-11.84	46.00	Average
9	2.310	35.35	9.70	45.05	-10.95	56.00	QP
10	2.310	25.35	9.70	35.04	-10.96	46.00	Average
11	2.890	35.07	9.71	44.78	-11.22	56.00	QP
12	2.890	24.48	9.71	34.19	-11.81	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.0°C /61%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 120V/60Hz

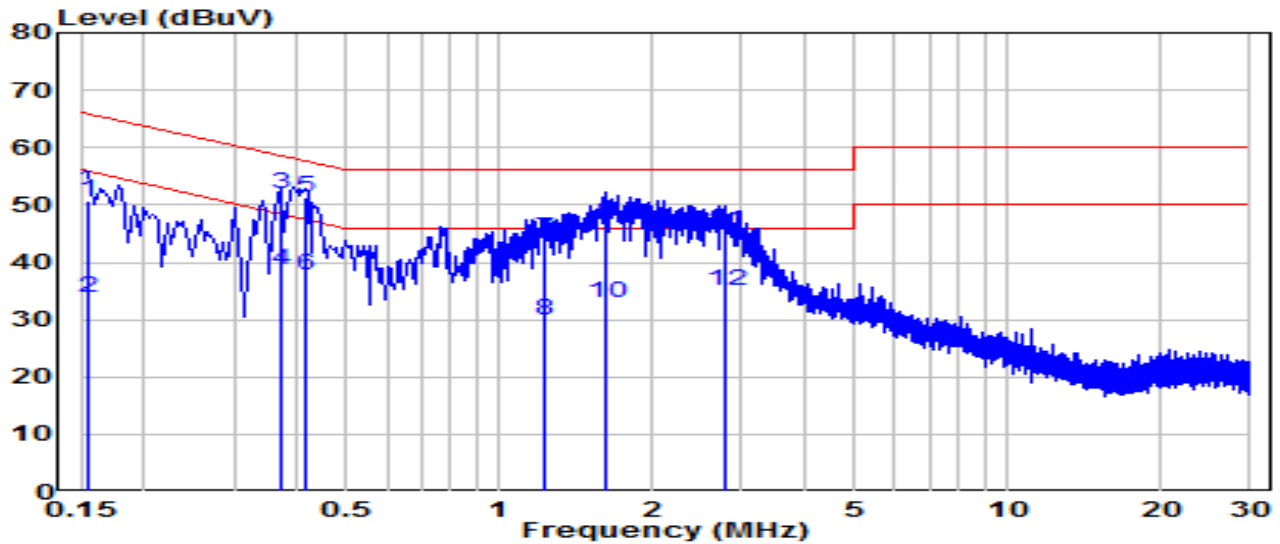


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.154	41.02	9.62	50.64	-15.12	65.75	QP
2	0.154	24.11	9.62	33.73	-22.02	55.75	Average
3	0.370	42.42	9.63	52.05	-6.44	58.49	QP
4	0.370	28.90	9.63	38.53	-9.96	48.49	Average
5	* 0.415	41.72	9.64	51.35	-6.19	57.54	QP
6	* 0.415	27.96	9.64	37.59	-9.95	47.54	Average
7	1.225	34.31	9.67	43.99	-12.01	56.00	QP
8	1.225	20.21	9.67	29.88	-16.12	46.00	Average
9	1.612	37.25	9.68	46.93	-9.07	56.00	QP
10	1.612	23.18	9.68	32.86	-13.14	46.00	Average
11	2.782	35.50	9.71	45.21	-10.79	56.00	QP
12	2.782	25.18	9.71	34.88	-11.12	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.0°C /61%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 240V/60Hz

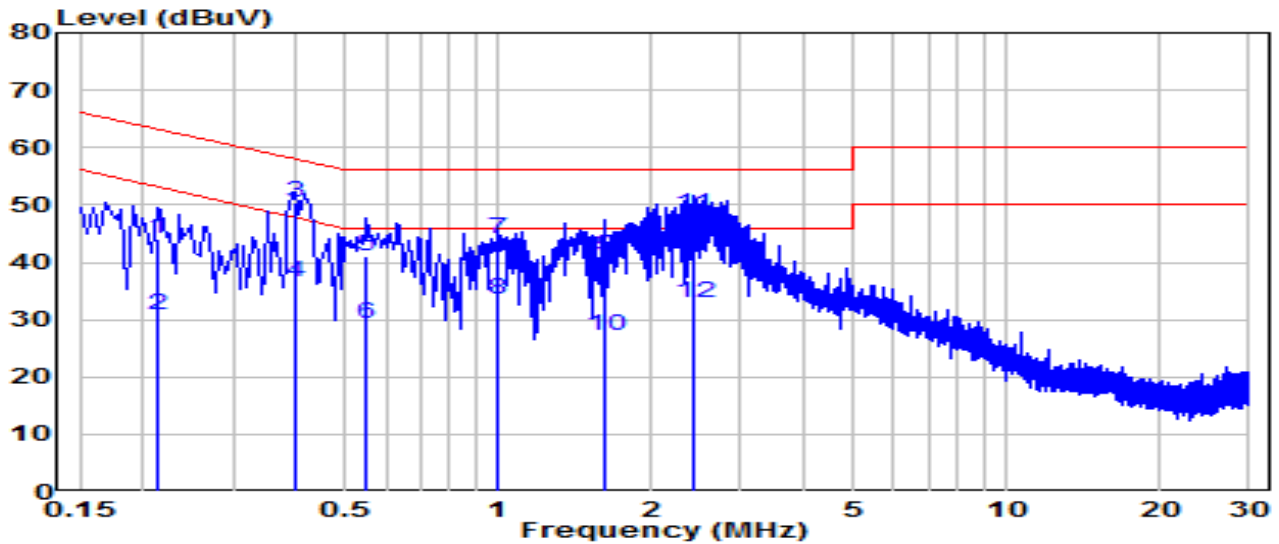


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.213	34.31	9.62	43.93	-19.15	63.09	QP
2	0.213	21.12	9.62	30.74	-22.35	53.09	Average
3	* 0.397	40.80	9.63	50.43	-7.47	57.91	QP
4	* 0.397	26.99	9.63	36.62	-11.28	47.91	Average
5	0.550	31.54	9.64	41.18	-14.82	56.00	QP
6	0.550	19.53	9.64	29.18	-16.82	46.00	Average
7	1.000	34.27	9.67	43.94	-12.06	56.00	QP
8	1.000	23.78	9.67	33.45	-12.55	46.00	Average
9	1.621	31.41	9.68	41.09	-14.91	56.00	QP
10	1.621	17.51	9.68	27.19	-18.81	46.00	Average
11	2.413	38.71	9.70	48.41	-7.59	56.00	QP
12	2.413	23.34	9.70	33.04	-12.96	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE11000 Ceiling Mount Quad-Band Wi-Fi 6E Access Point	Date of Test	2022-12-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.0°C /61%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2+3+4	Test Voltage	AC 240V/60Hz

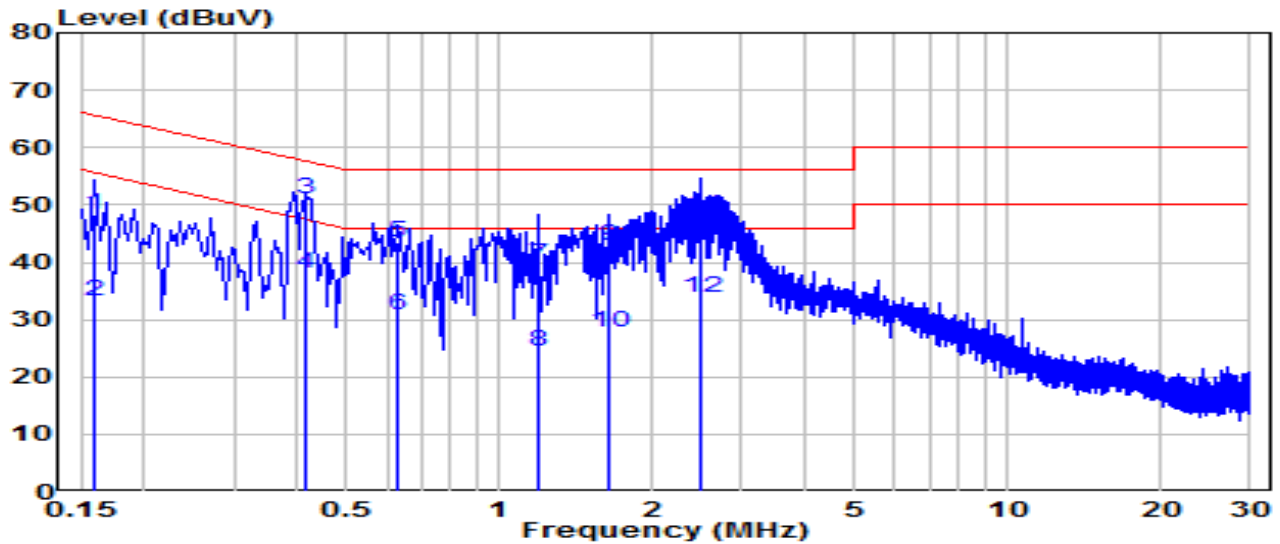

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.159	38.62	9.62	48.24	-17.28	65.52	QP
2	0.159	23.55	9.62	33.17	-22.35	55.52	Average
3	* 0.415	41.36	9.64	51.00	-6.54	57.54	QP
4	* 0.415	28.42	9.64	38.05	-9.48	47.54	Average
5	0.631	33.91	9.65	43.56	-12.44	56.00	QP
6	0.631	21.22	9.65	30.87	-15.13	46.00	Average
7	1.189	29.83	9.67	39.51	-16.49	56.00	QP
8	1.189	14.67	9.67	24.34	-21.66	46.00	Average
9	1.644	33.07	9.68	42.75	-13.25	56.00	QP
10	1.644	17.98	9.68	27.67	-18.33	46.00	Average
11	2.499	38.40	9.70	48.10	-7.90	56.00	QP
12	2.499	23.97	9.70	33.67	-12.33	46.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

————— The End —————

Appendix A : Test Setup Photograph

Refer to "2212TW0111-Setup Photo" file.

Appendix B : External Photograph

Refer to "2212TW0111-External Photo" file.

Appendix C : Internal Photograph

Refer to "2212TW0111-Internal Photo" file.