

## 11.7. APPENDIX G: DUTY CYCLE

### 11.7.1. Test Result

Test Mode	Antenna	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	Ant1	12.38	12.51	0.9896	98.96	0.05	0.08	0.01
	Ant2	12.38	12.51	0.9896	98.96	0.05	0.08	0.01
11G	Ant1	2.05	2.18	0.9404	94.04	0.27	0.49	1
	Ant2	2.05	2.18	0.9404	94.04	0.27	0.49	1
11N20SISO	Ant1	1.90	2.03	0.9360	93.60	0.29	0.53	1
	Ant2	1.90	2.03	0.9360	93.60	0.29	0.53	1

Note:


Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time


If that calculated VBW is not available on the analyzer then the next higher value should be used.

### 11.7.2. Test Graphs

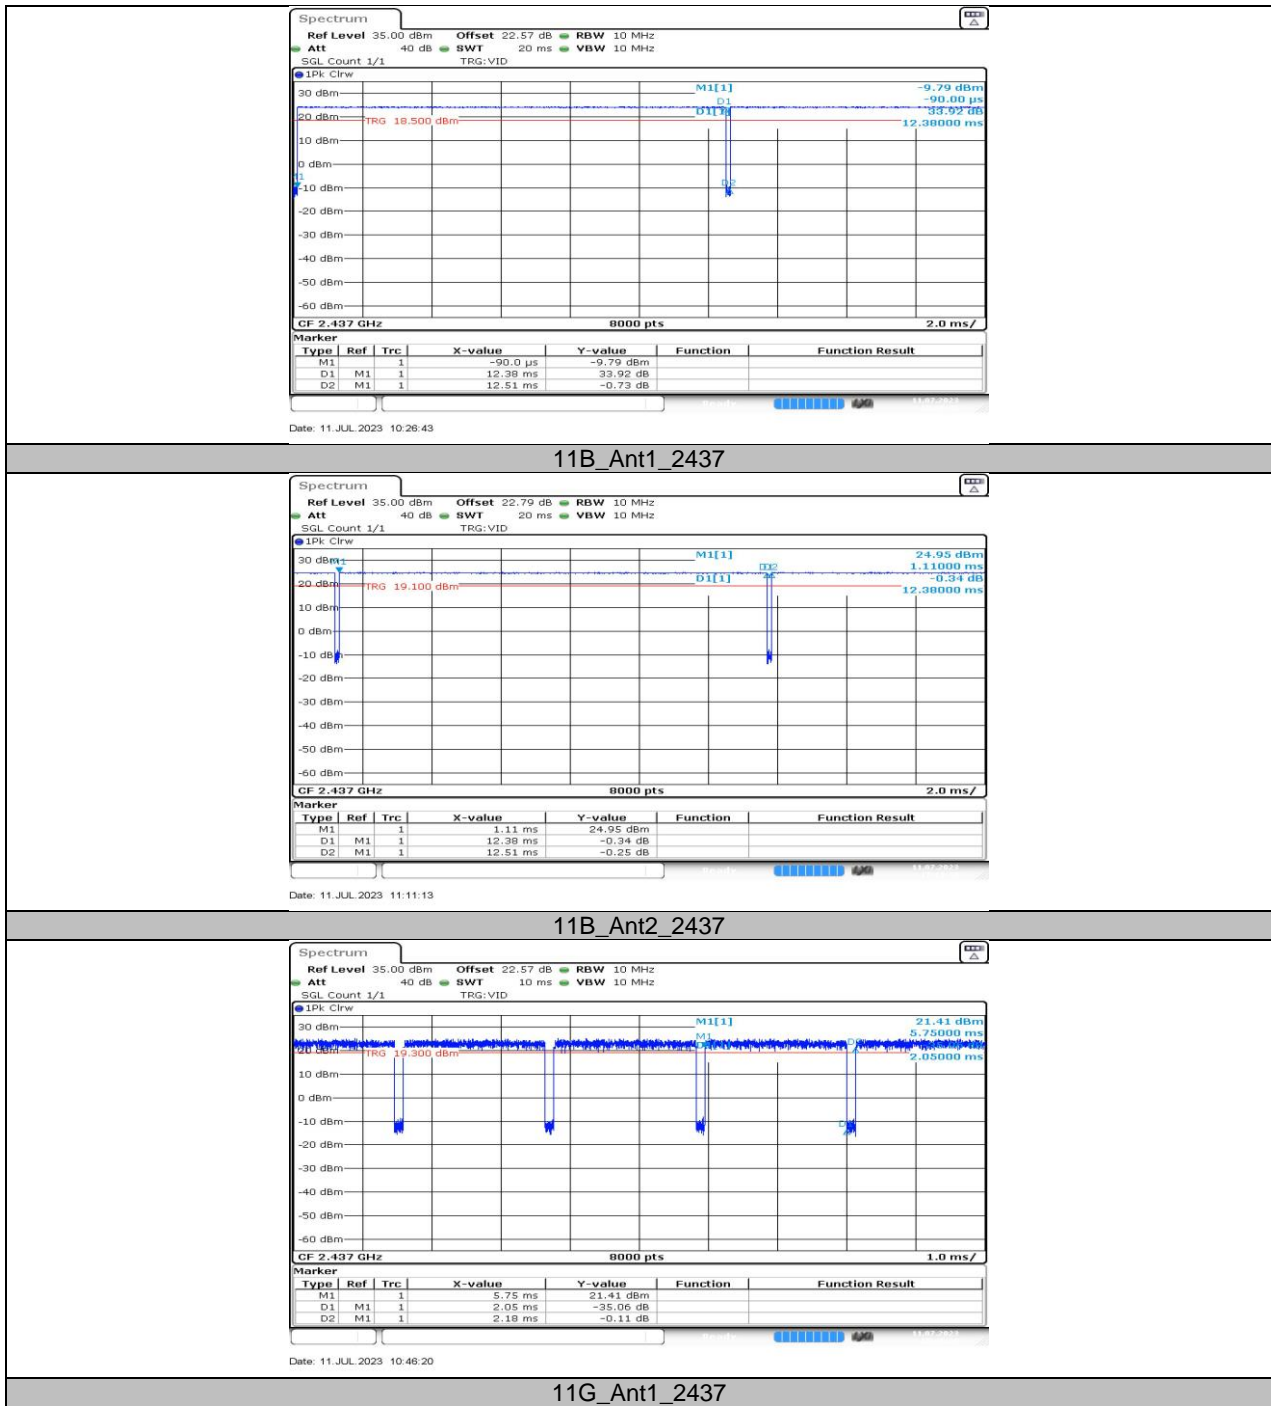


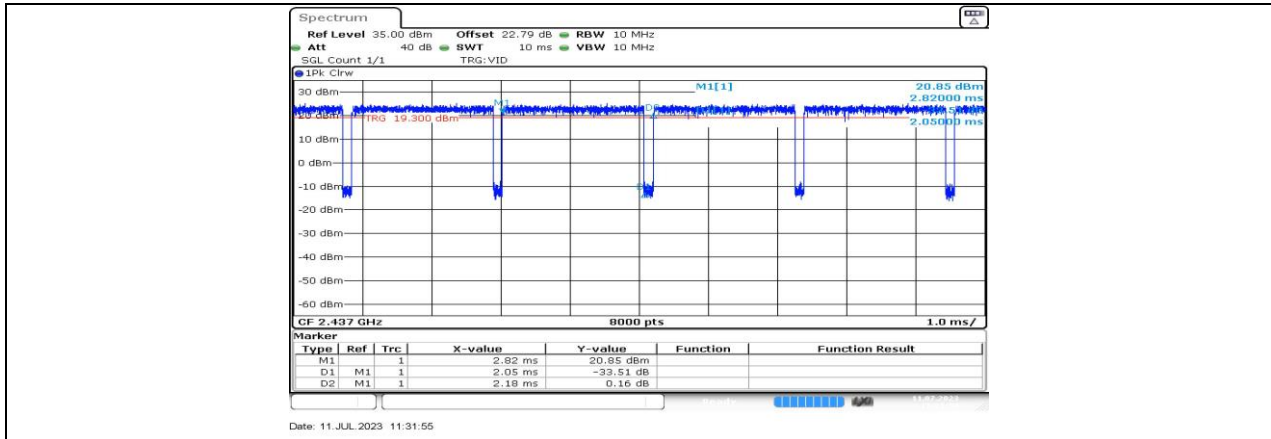

11G\_Ant2\_2437

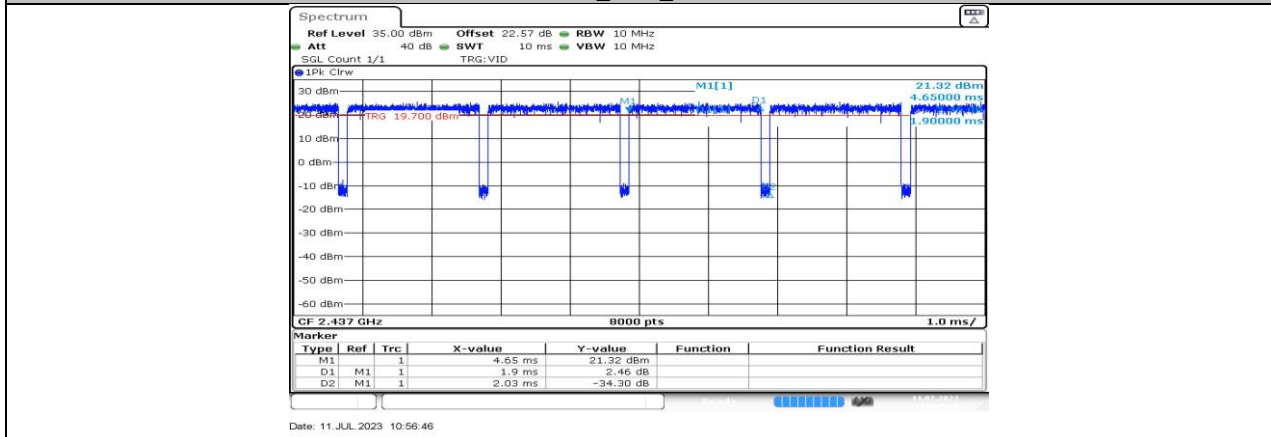

11N20SISO\_Ant1\_2437

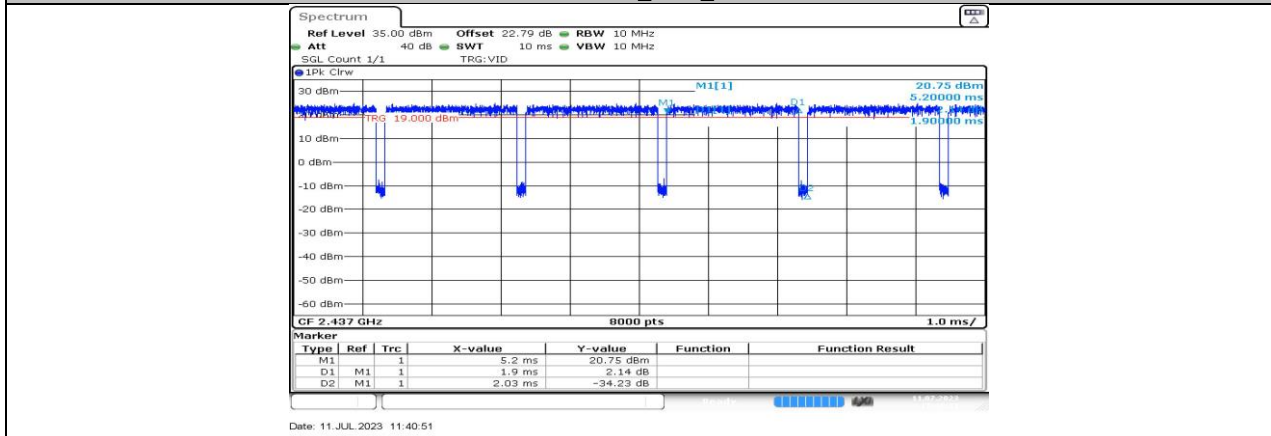

11N20SISO\_Ant2\_2437

END OF REPORT