


EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

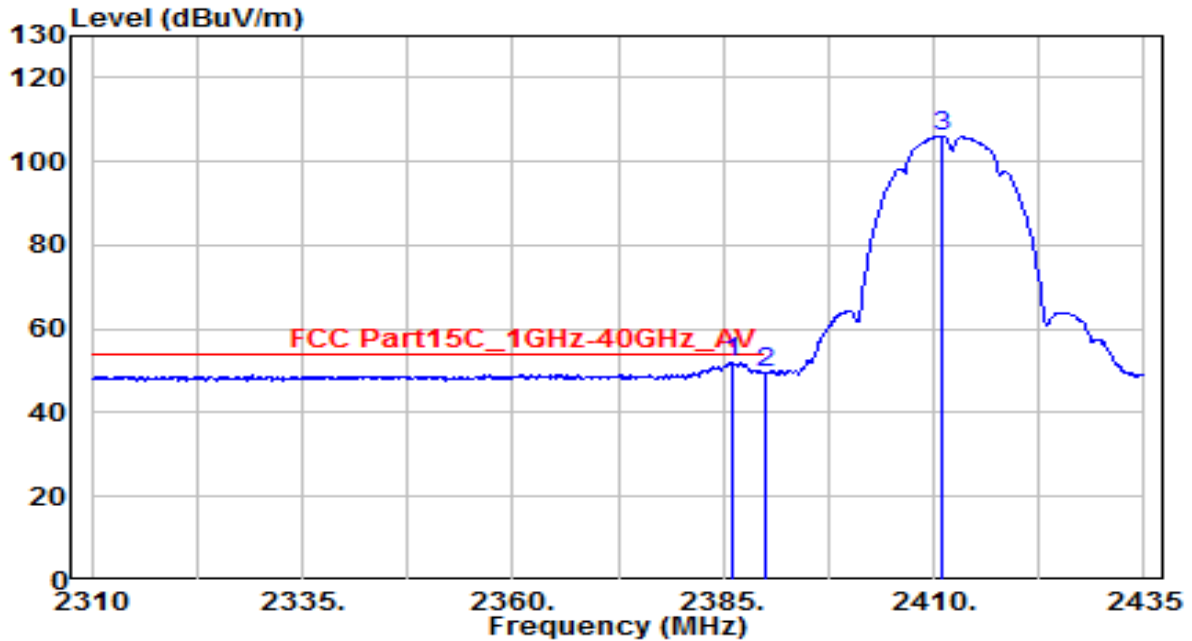


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2386.250	19.59	32.27	51.86	-2.14	54.00	100	285	Average
2	2390.000	17.29	32.28	49.57	-4.43	54.00	100	285	Average
3	2411.000	73.74	32.36	106.10	N/A	N/A	100	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

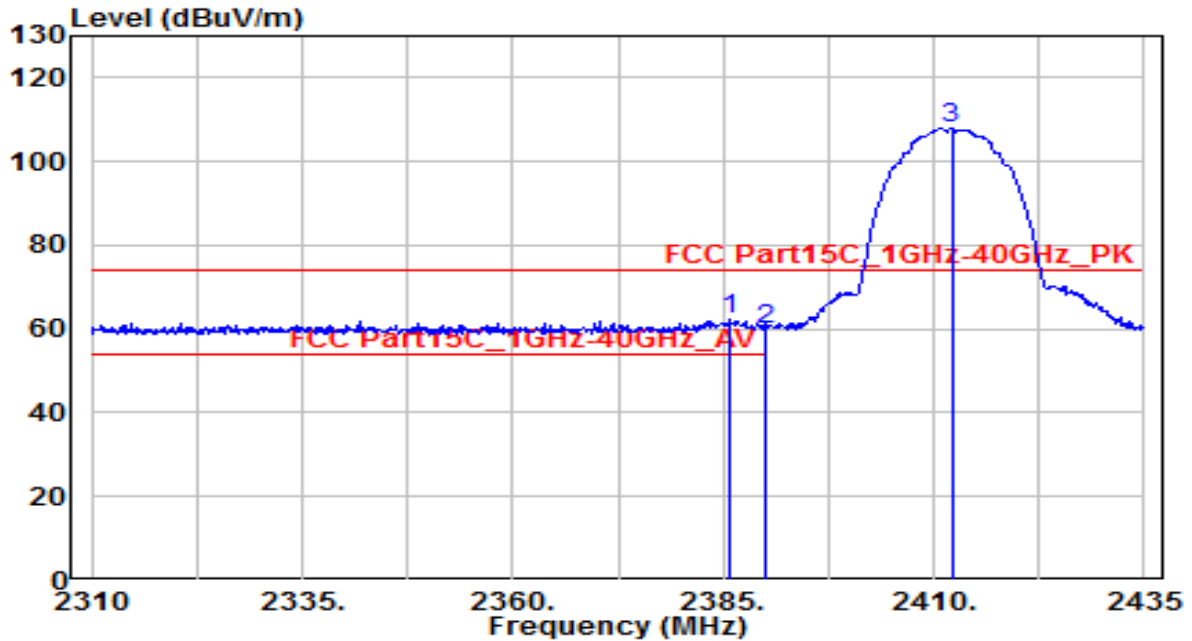


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2385.875	30.09	32.27	62.36	-11.64	74.00	220	265	Peak
2	2390.000	27.37	32.28	59.65	-14.35	74.00	220	265	Peak
3	2412.125	75.66	32.36	108.02	N/A	N/A	220	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

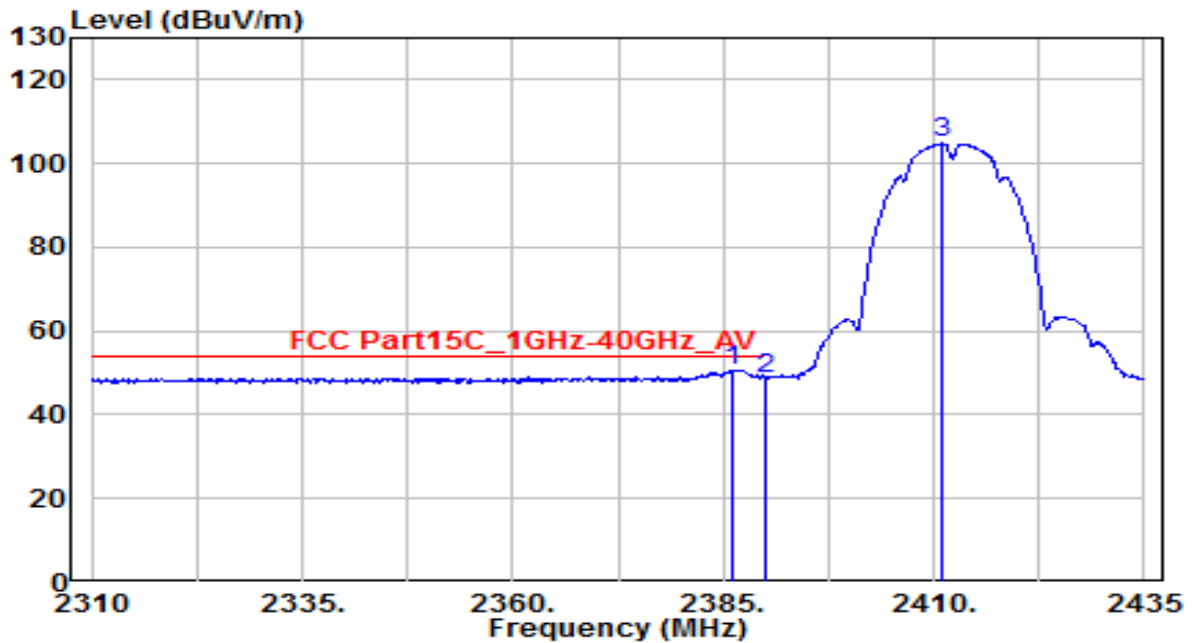


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2386.250	18.33	32.27	50.60	-3.40	54.00	220	265	Average
2	2390.000	16.31	32.28	48.59	-5.41	54.00	220	265	Average
3	2411.125	72.45	32.36	104.81	N/A	N/A	220	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

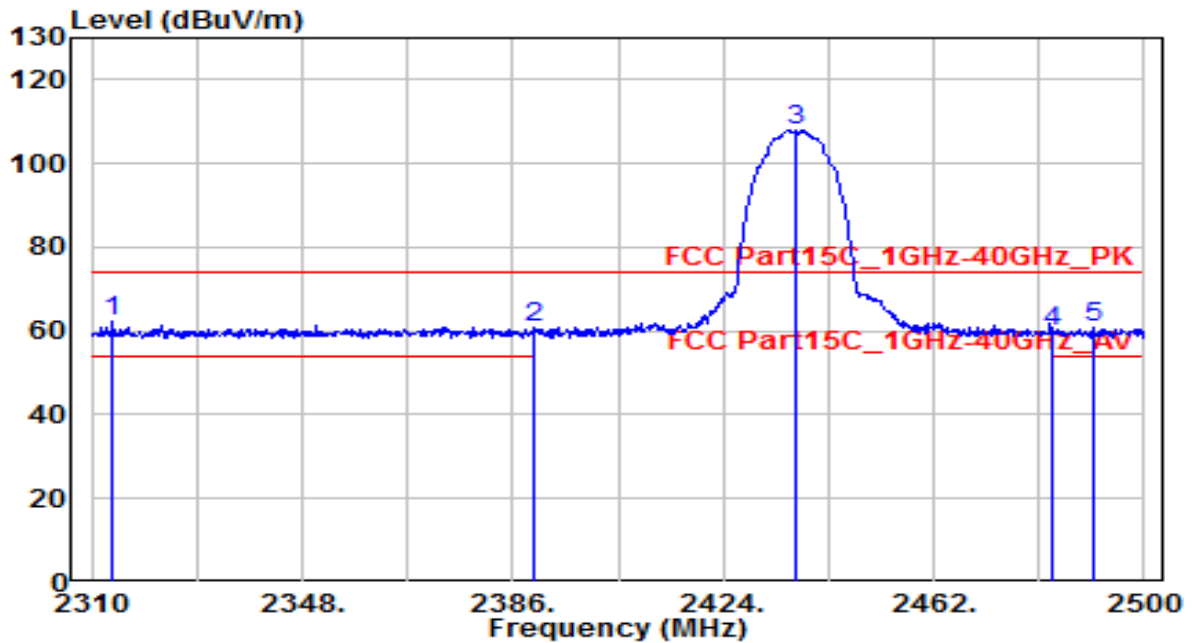


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2313.800	30.19	32.01	62.20	-11.80	74.00	150	285	Peak
2	2390.000	28.60	32.28	60.89	-13.11	74.00	150	285	Peak
3	2437.110	75.56	32.45	108.01	N/A	N/A	150	285	Peak
4	2483.500	27.24	32.62	59.86	-14.14	74.00	150	285	Peak
5	2490.880	28.01	32.65	60.66	-13.34	74.00	150	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

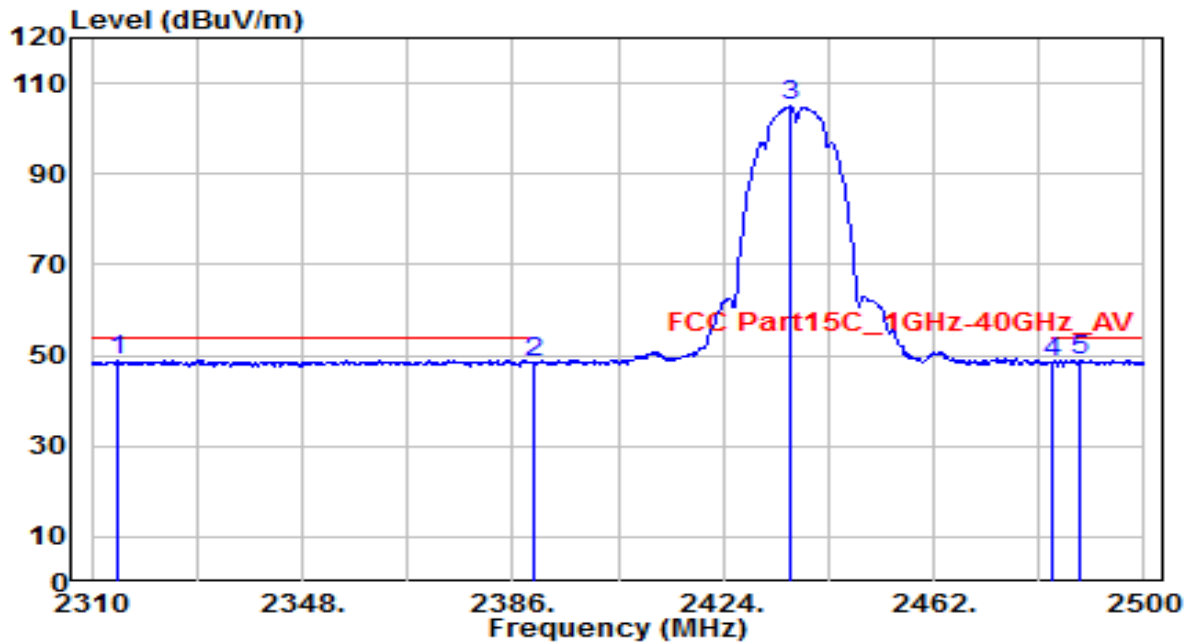


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2314.560	16.84	32.01	48.85	-5.15	54.00	150	285	Average
2	2390.000	16.27	32.28	48.55	-5.45	54.00	150	285	Average
3	2435.970	72.39	32.45	104.84	N/A	N/A	150	285	Average
4	2483.500	15.65	32.62	48.27	-5.73	54.00	150	285	Average
5	* 2488.410	16.44	32.64	49.08	-4.92	54.00	150	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

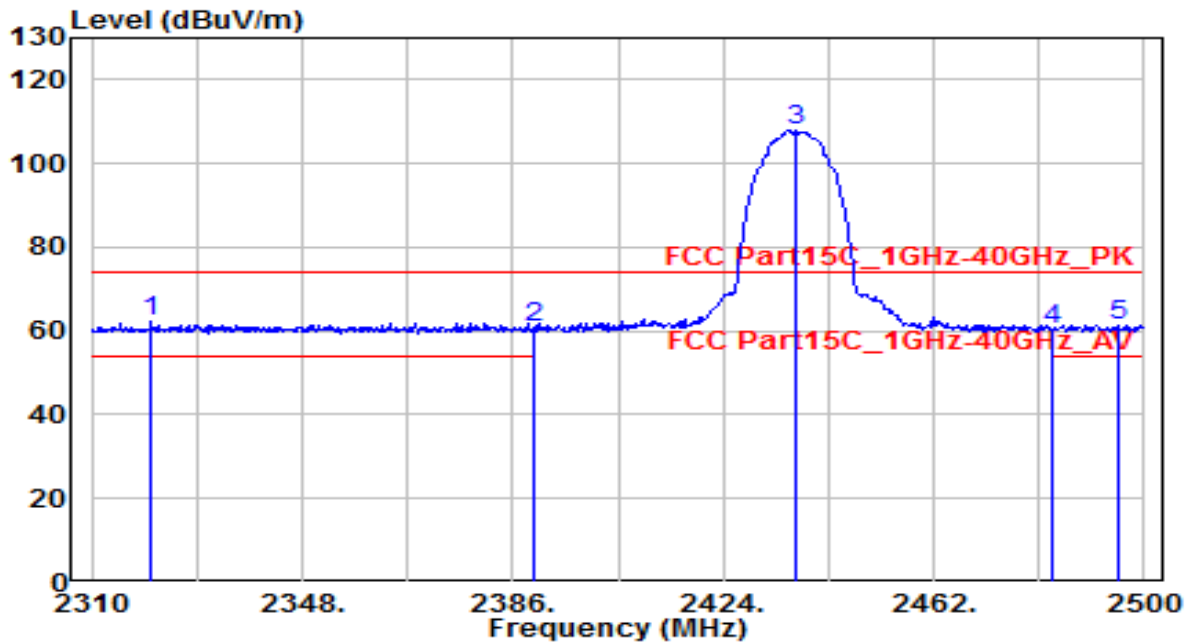


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2320.640	30.11	32.03	62.14	-11.86	74.00	220	265	Peak
2	2390.000	28.61	32.28	60.90	-13.10	74.00	220	265	Peak
3	2437.110	75.46	32.45	107.91	N/A	N/A	220	265	Peak
4	2483.500	27.73	32.62	60.35	-13.65	74.00	220	265	Peak
5	2495.440	28.73	32.66	61.40	-12.60	74.00	220	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

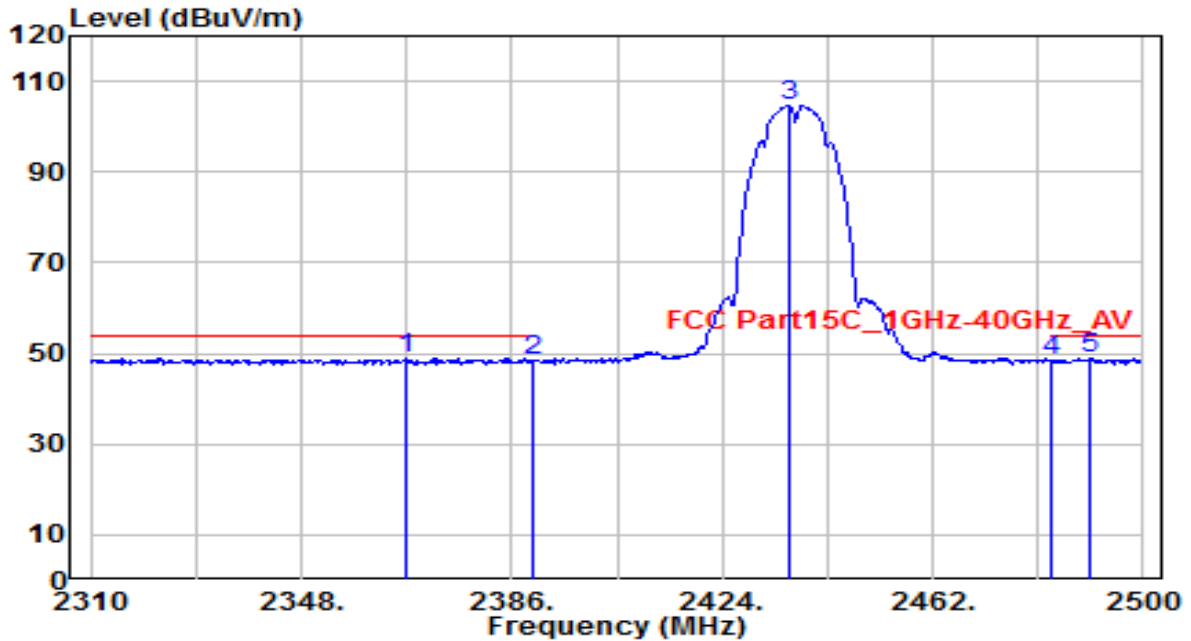


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2366.810	16.73	32.20	48.93	-5.07	54.00	220	265	Average
2	2390.000	16.09	32.28	48.38	-5.62	54.00	220	265	Average
3	2435.970	72.27	32.45	104.72	N/A	N/A	220	265	Average
4	2483.500	15.89	32.62	48.52	-5.48	54.00	220	265	Average
5	2490.500	16.11	32.65	48.76	-5.24	54.00	220	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

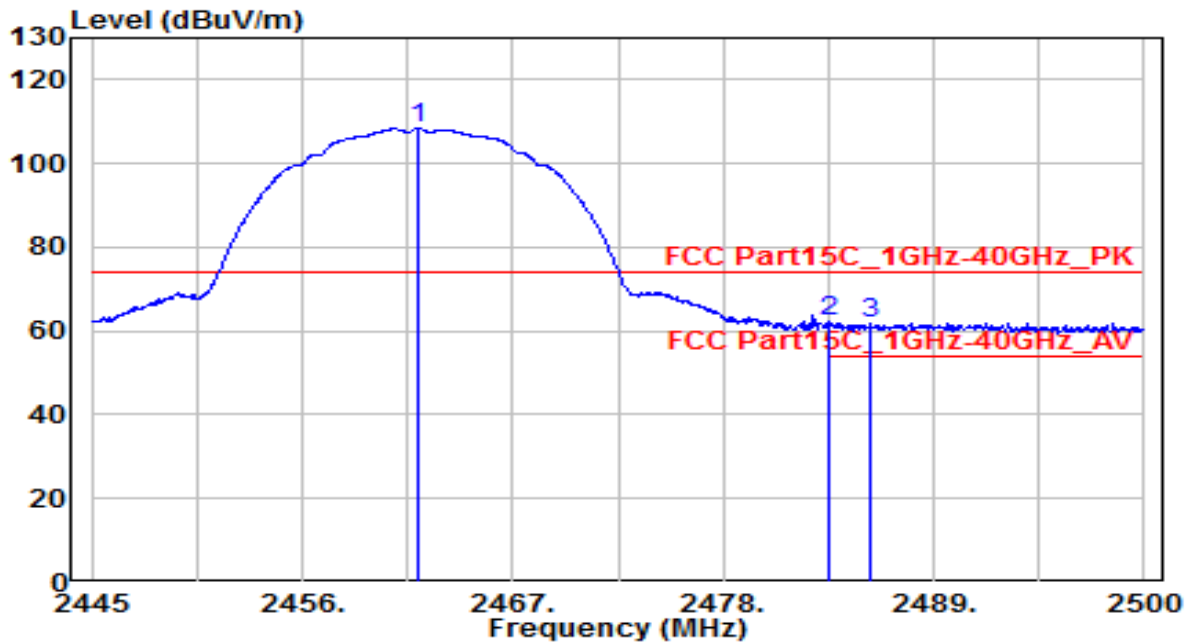


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.105	75.87	32.54	108.41	N/A	N/A	160	285	Peak
2	* 2483.500	29.64	32.62	62.27	-11.73	74.00	160	285	Peak
3	2485.755	29.16	32.63	61.79	-12.21	74.00	160	285	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

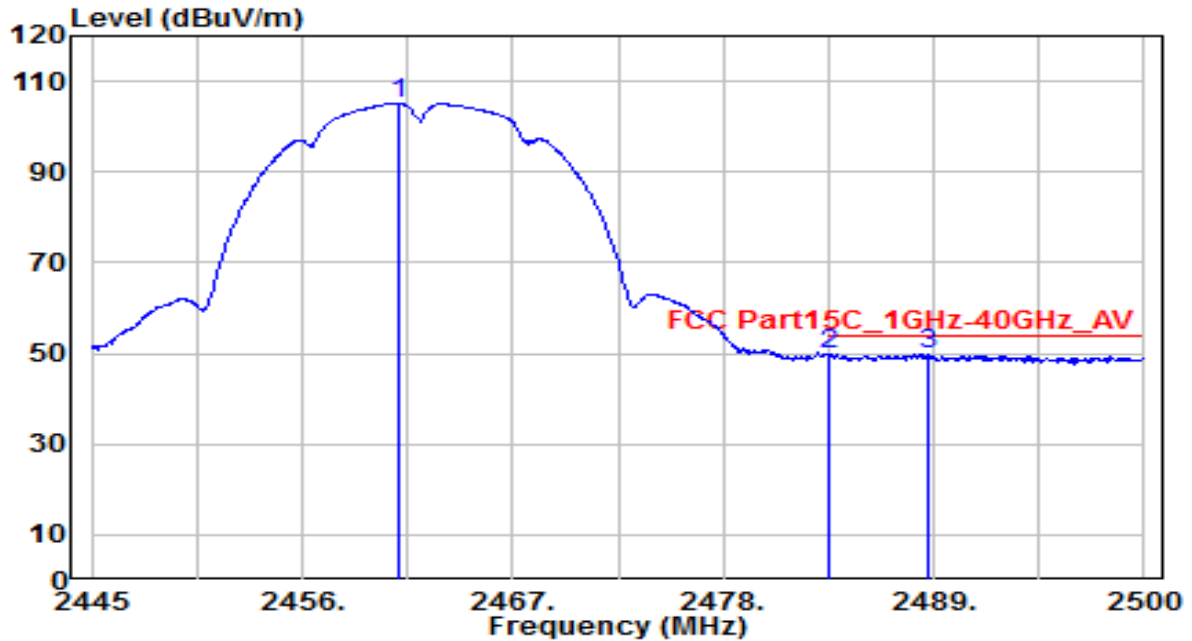


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.005	72.64	32.54	105.18	N/A	N/A	160	285	Average
2	2483.500	17.07	32.62	49.69	-4.31	54.00	160	285	Average
3	* 2488.780	17.12	32.64	49.76	-4.24	54.00	160	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

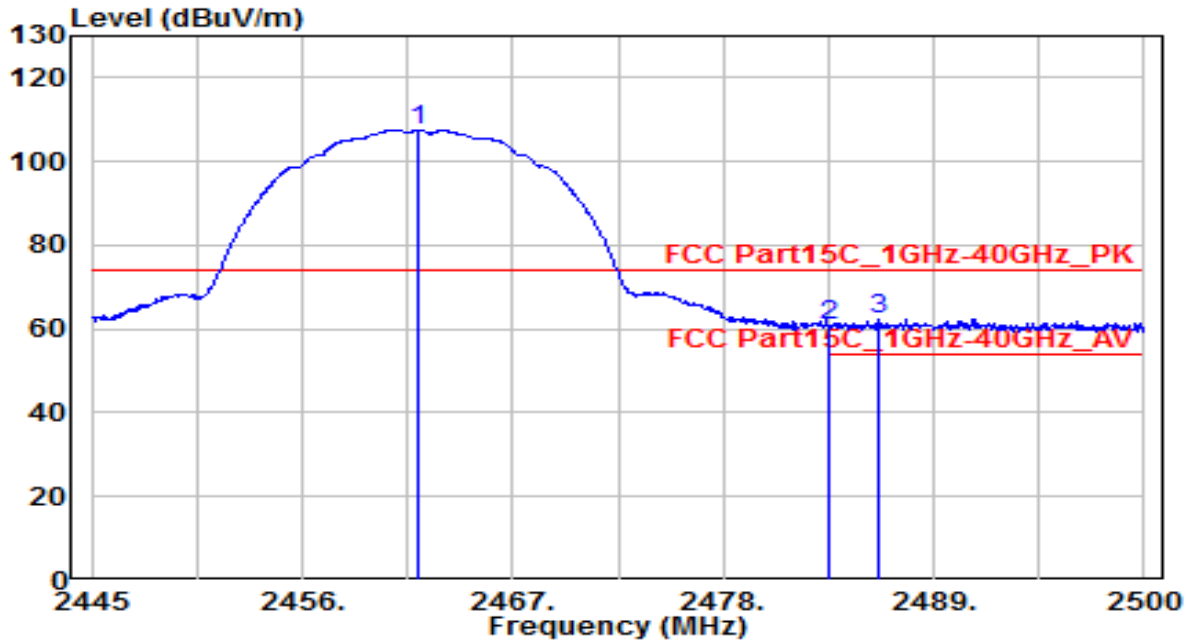


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.050	75.12	32.54	107.66	N/A	N/A	215	265	Peak
2	2483.500	28.06	32.62	60.69	-13.31	74.00	215	265	Peak
3	* 2486.085	29.69	32.63	62.32	-11.68	74.00	215	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

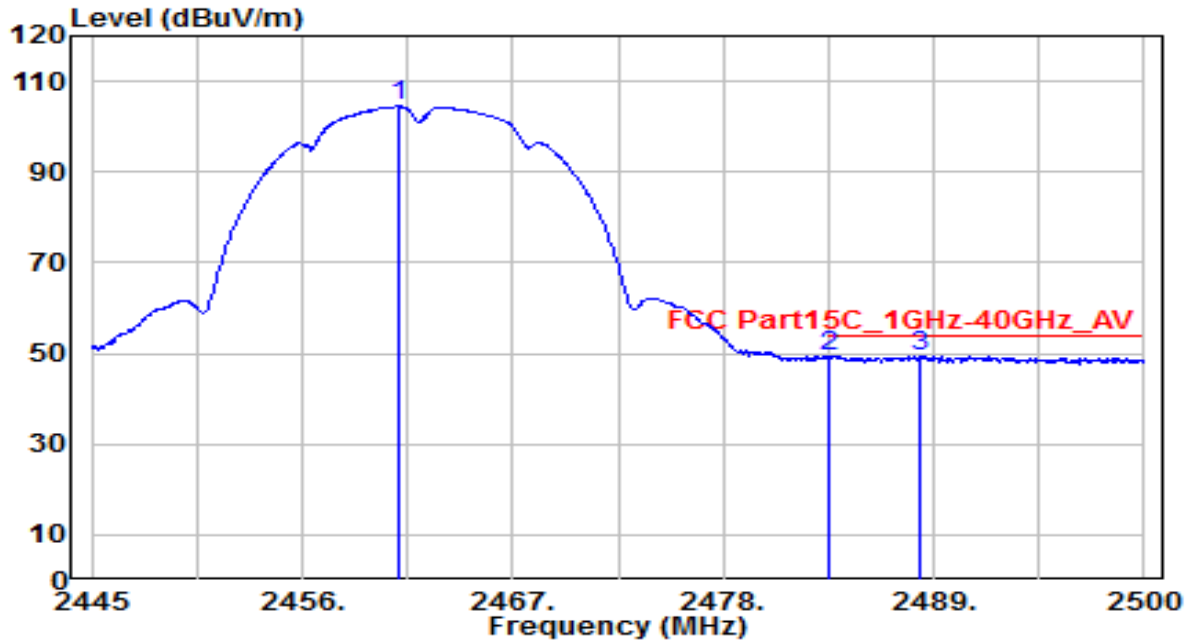


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.005	71.91	32.54	104.45	N/A	N/A	215	265	Average
2	2483.500	16.78	32.62	49.40	-4.60	54.00	215	265	Average
3	* 2488.285	16.86	32.64	49.50	-4.50	54.00	215	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

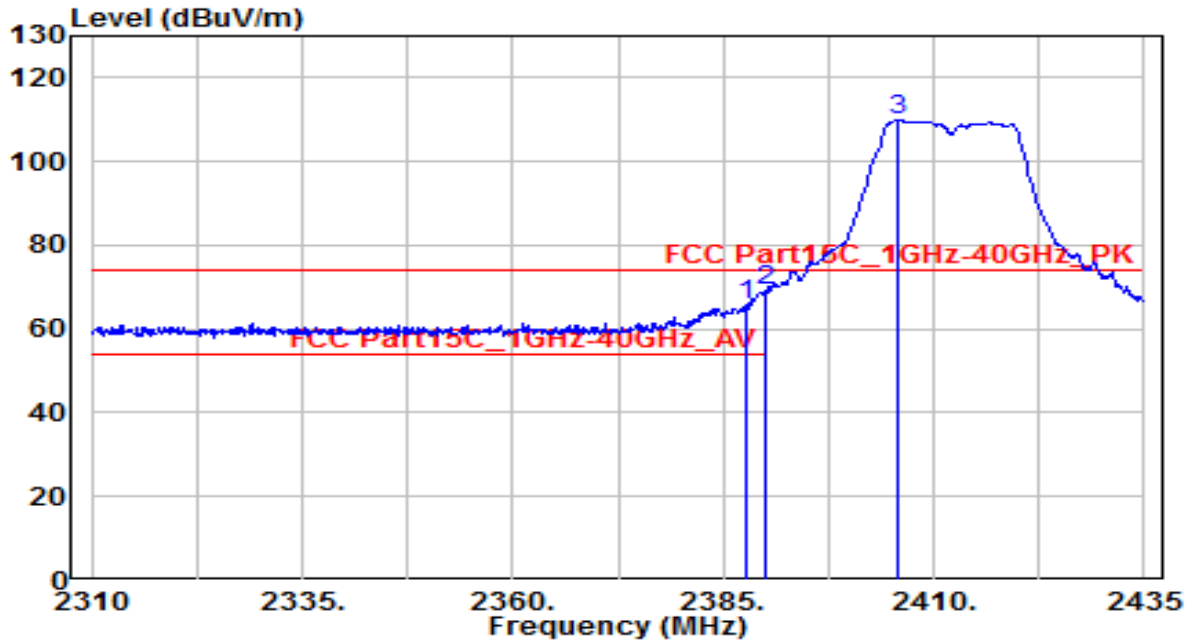


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.750	33.52	32.28	65.79	-8.21	74.00	100	285	Peak
2	* 2390.000	36.72	32.28	69.00	-5.00	74.00	100	285	Peak
3	2405.875	77.62	32.34	109.96	N/A	N/A	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

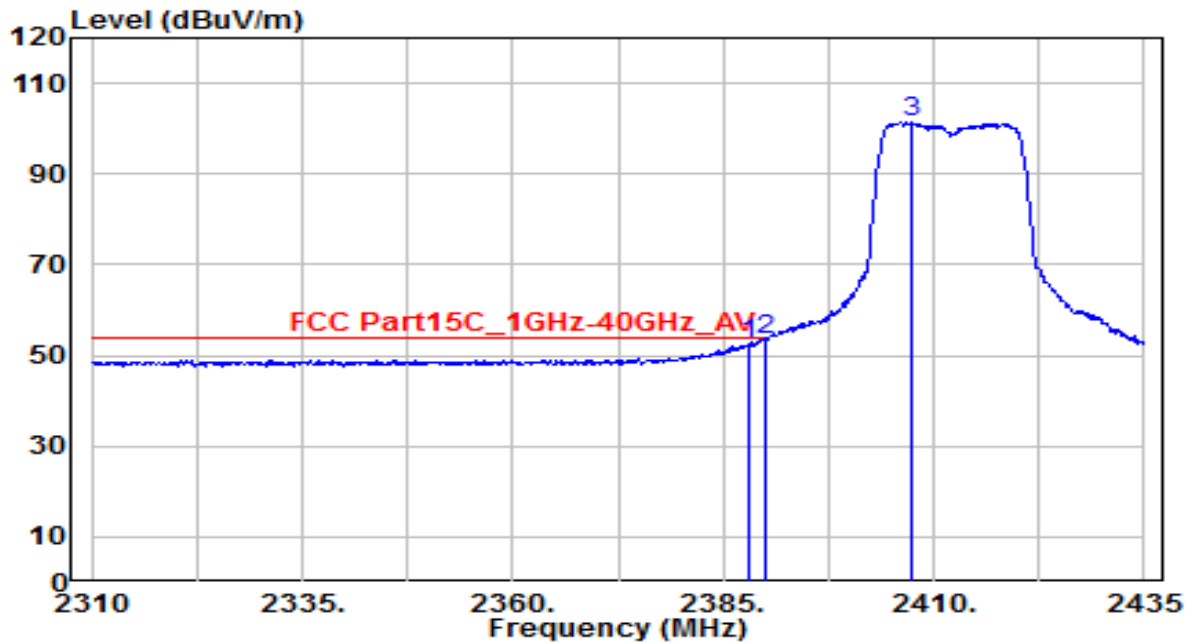


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	20.43	32.28	52.71	-1.29	54.00	100	285	Average
2	* 2390.000	21.30	32.28	53.59	-0.41	54.00	100	285	Average
3	2407.375	68.99	32.35	101.34	N/A	N/A	100	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

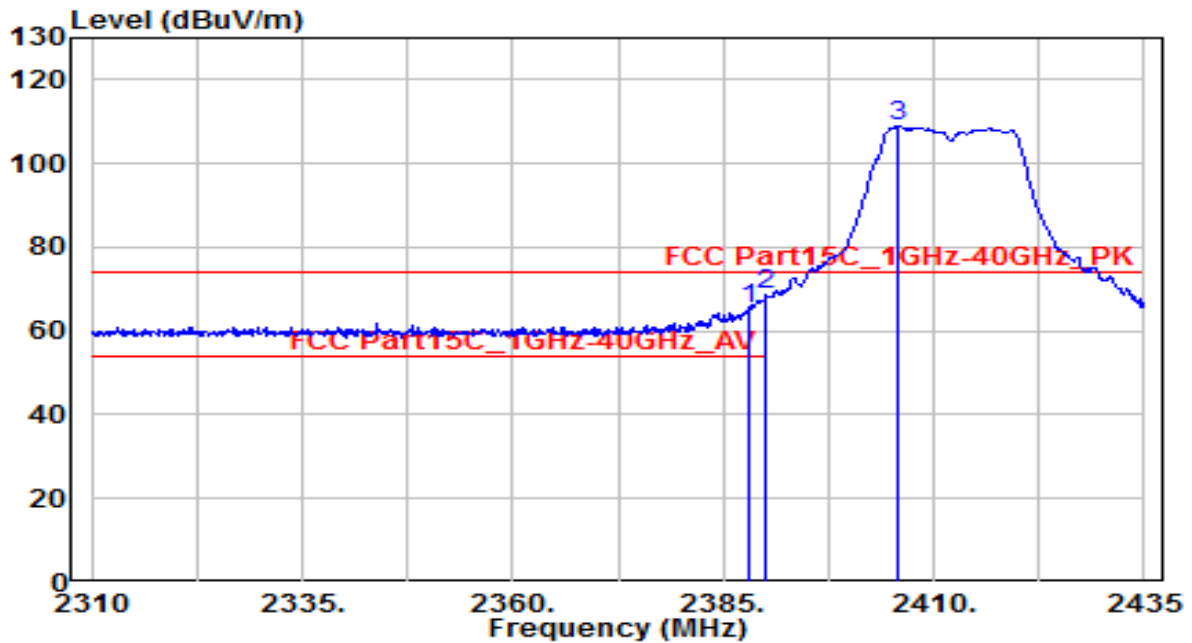


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	33.15	32.28	65.42	-8.58	74.00	220	265	Peak
2	* 2390.000	36.30	32.28	68.58	-5.42	74.00	220	265	Peak
3	2405.875	76.41	32.34	108.75	N/A	N/A	220	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

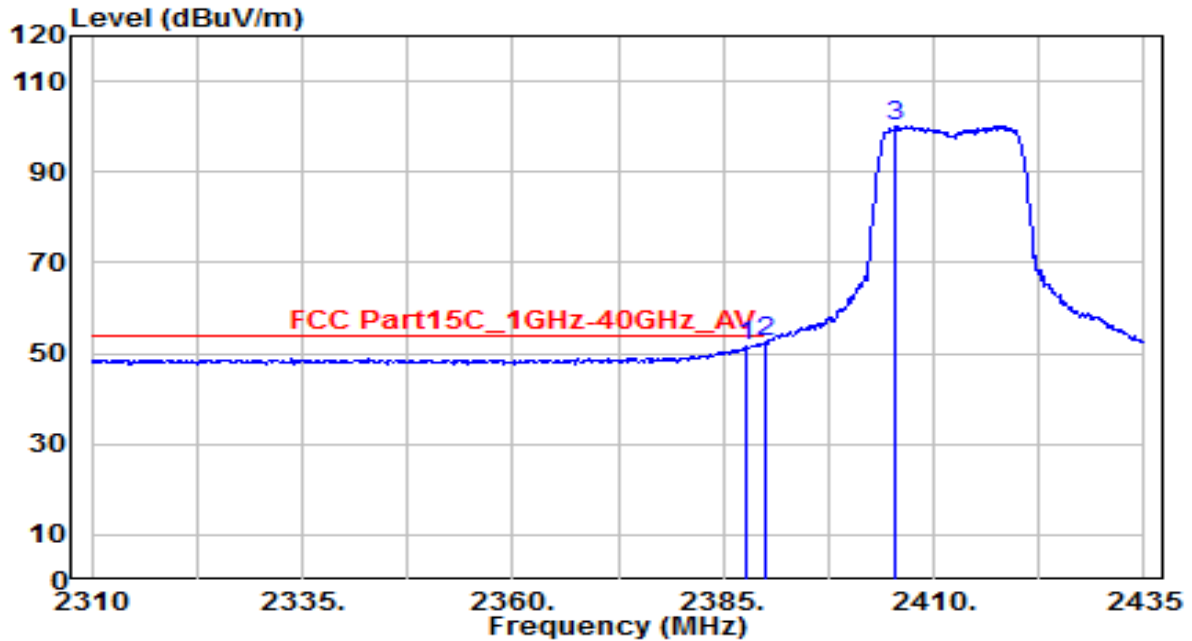


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	19.19	32.28	51.47	-2.53	54.00	220	265	Average
2	* 2390.000	20.47	32.28	52.75	-1.25	54.00	220	265	Average
3	2405.375	67.92	32.34	100.26	N/A	N/A	220	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

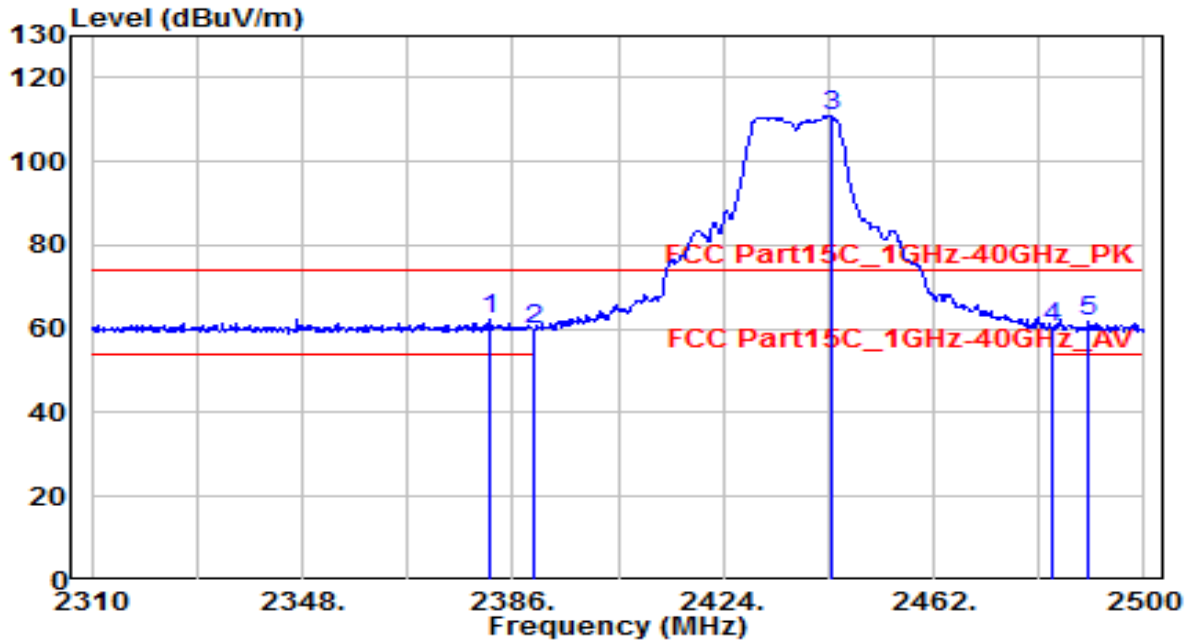


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2381.630	29.92	32.25	62.18	-11.82	74.00	150	285	Peak
2	2390.000	27.65	32.28	59.94	-14.06	74.00	150	285	Peak
3	2443.380	78.46	32.48	110.93	N/A	N/A	150	285	Peak
4	2483.500	27.96	32.62	60.58	-13.42	74.00	150	285	Peak
5	2489.930	28.93	32.64	61.57	-12.43	74.00	150	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

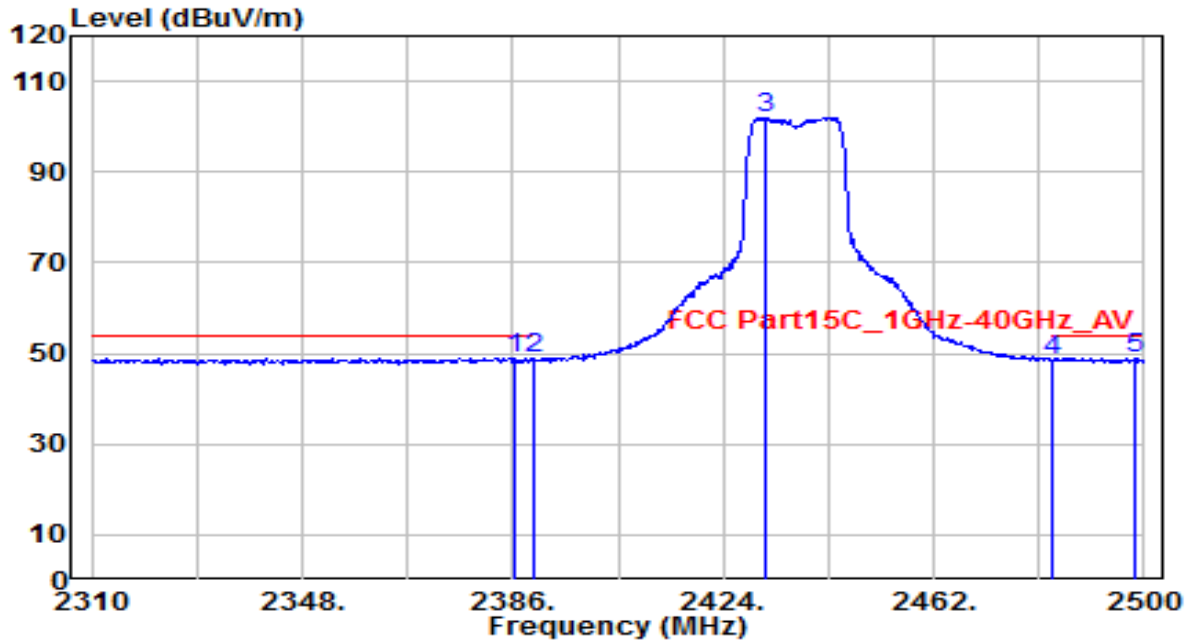


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	16.58	32.27	48.85	-5.15	54.00	150	285	Average
2	* 2390.000	16.71	32.28	49.00	-5.00	54.00	150	285	Average
3	2431.600	69.65	32.43	102.08	N/A	N/A	150	285	Average
4	2483.500	16.04	32.62	48.66	-5.34	54.00	150	285	Average
5	2498.480	16.29	32.67	48.96	-5.04	54.00	150	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

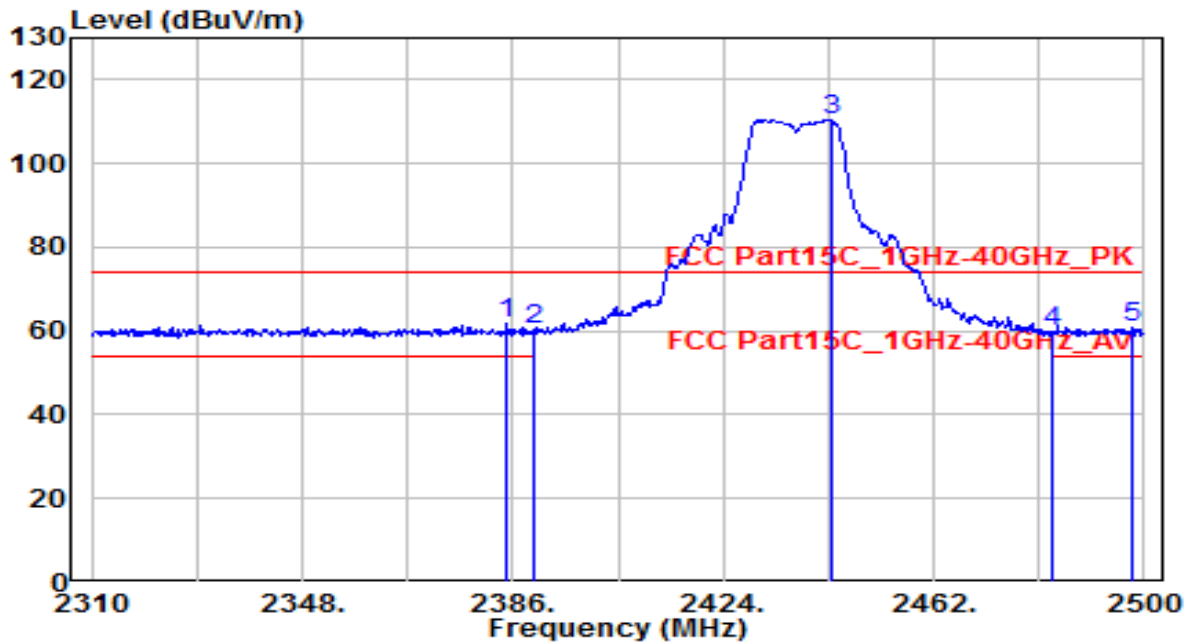


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2385.050	29.45	32.27	61.72	-12.28	74.00	220	265	Peak
2	2390.000	27.88	32.28	60.16	-13.84	74.00	220	265	Peak
3	2443.380	78.00	32.48	110.48	N/A	N/A	220	265	Peak
4	2483.500	27.21	32.62	59.83	-14.17	74.00	220	265	Peak
5	2497.910	28.24	32.67	60.91	-13.09	74.00	220	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

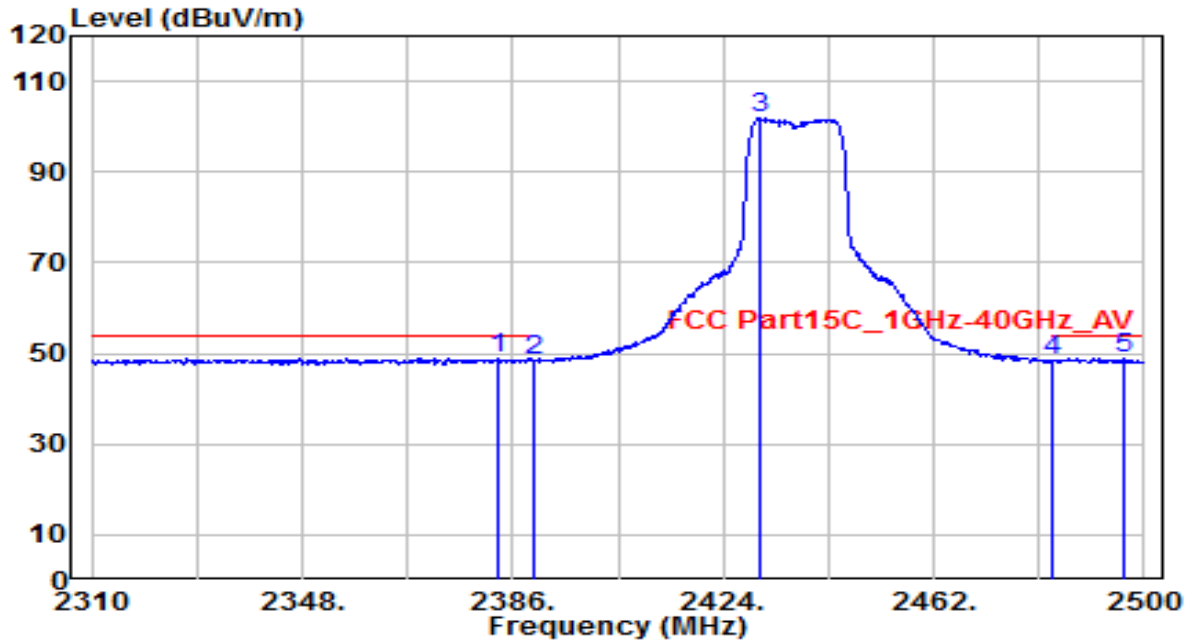


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.340	16.63	32.26	48.89	-5.11	54.00	220	265	Average
2	2390.000	16.16	32.28	48.45	-5.55	54.00	220	265	Average
3	2430.650	69.61	32.43	102.04	N/A	N/A	220	265	Average
4	2483.500	15.88	32.62	48.50	-5.50	54.00	220	265	Average
5	* 2496.580	16.28	32.67	48.94	-5.06	54.00	220	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

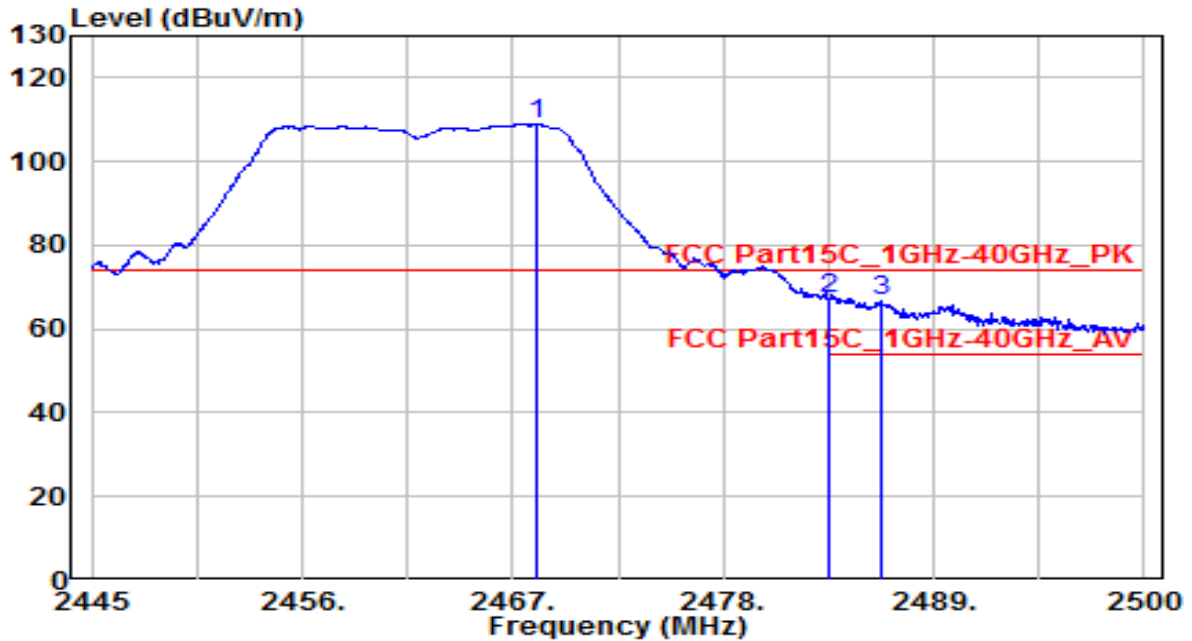


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.265	76.23	32.57	108.80	N/A	N/A	160	285	Peak
2	* 2483.500	34.82	32.62	67.45	-6.55	74.00	160	285	Peak
3	2486.195	34.03	32.63	66.66	-7.34	74.00	160	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

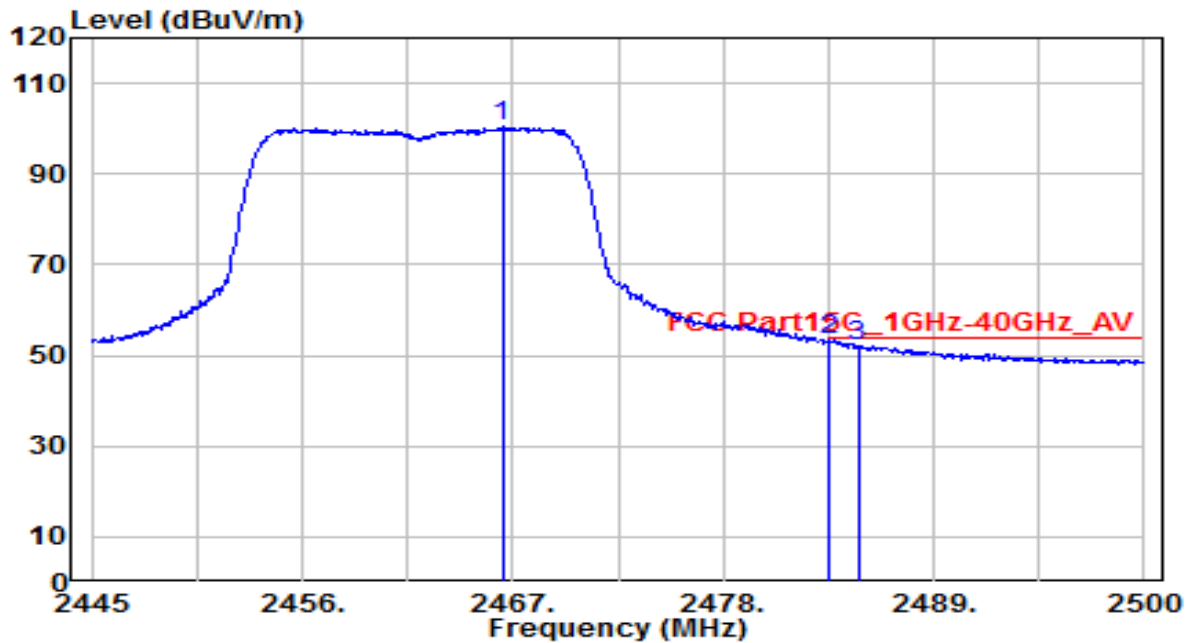


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.450	67.81	32.56	100.37	N/A	N/A	160	285	Average
2	* 2483.500	20.84	32.62	53.46	-0.54	54.00	160	285	Average
3	2485.040	19.42	32.63	52.05	-1.95	54.00	160	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

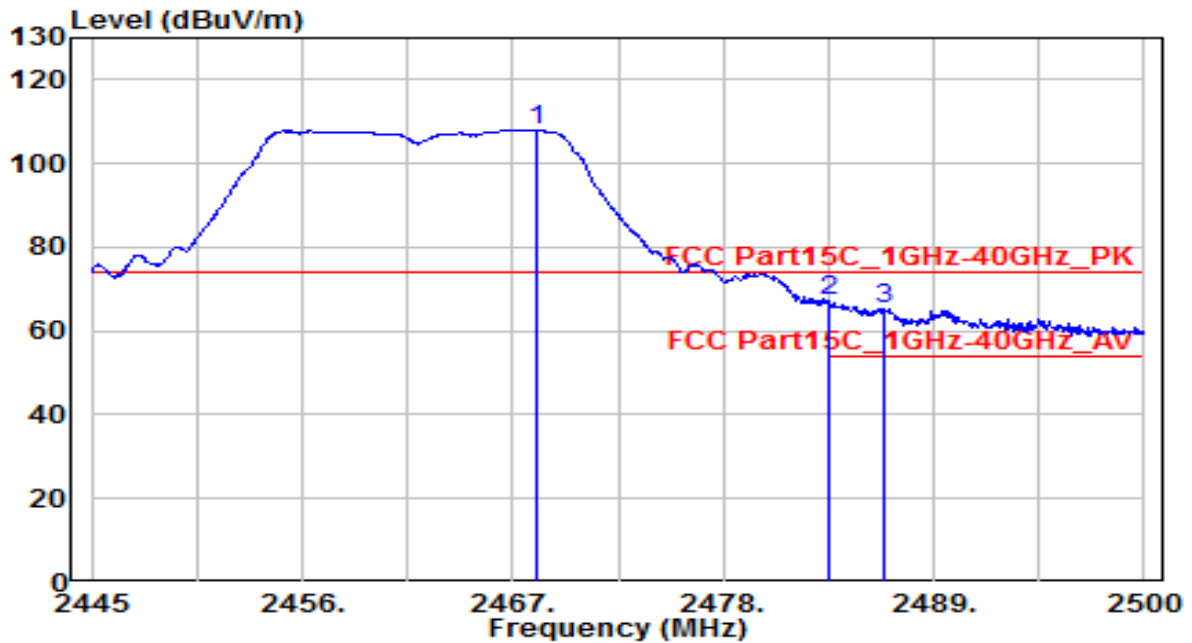


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.210	75.48	32.57	108.04	N/A	N/A	215	265	Peak
2	* 2483.500	34.41	32.62	67.03	-6.97	74.00	215	265	Peak
3	2486.415	32.80	32.63	65.43	-8.57	74.00	215	265	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

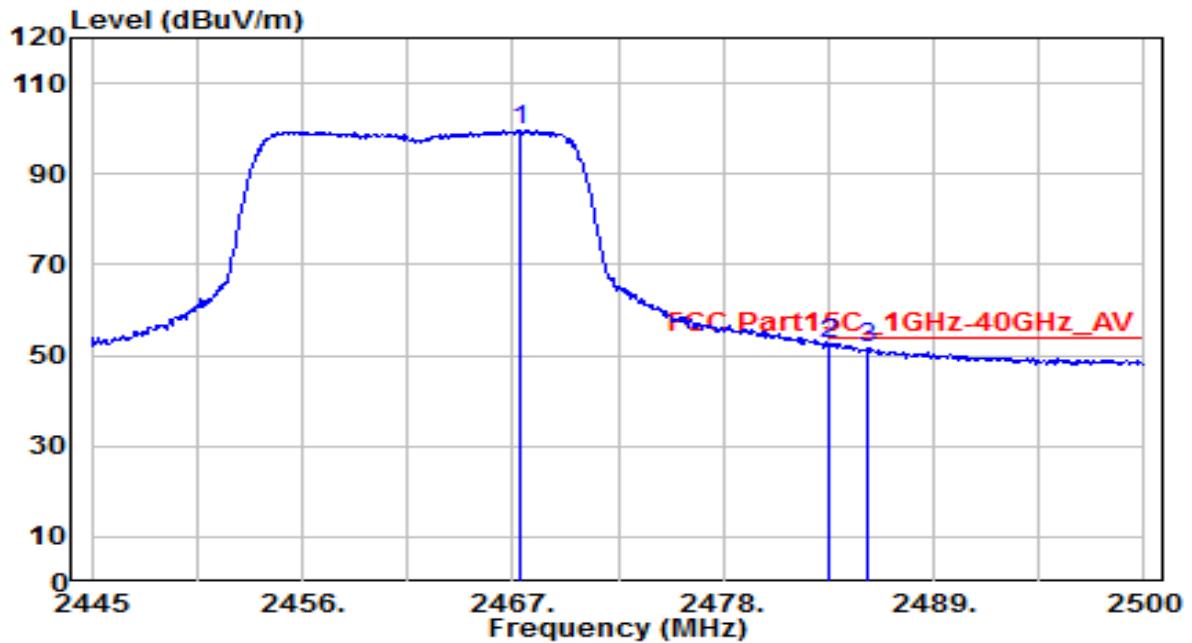


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.385	67.08	32.56	99.65	N/A	N/A	215	265	Average
2	* 2483.500	20.04	32.62	52.66	-1.34	54.00	215	265	Average
3	2485.480	18.89	32.63	51.52	-2.48	54.00	215	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

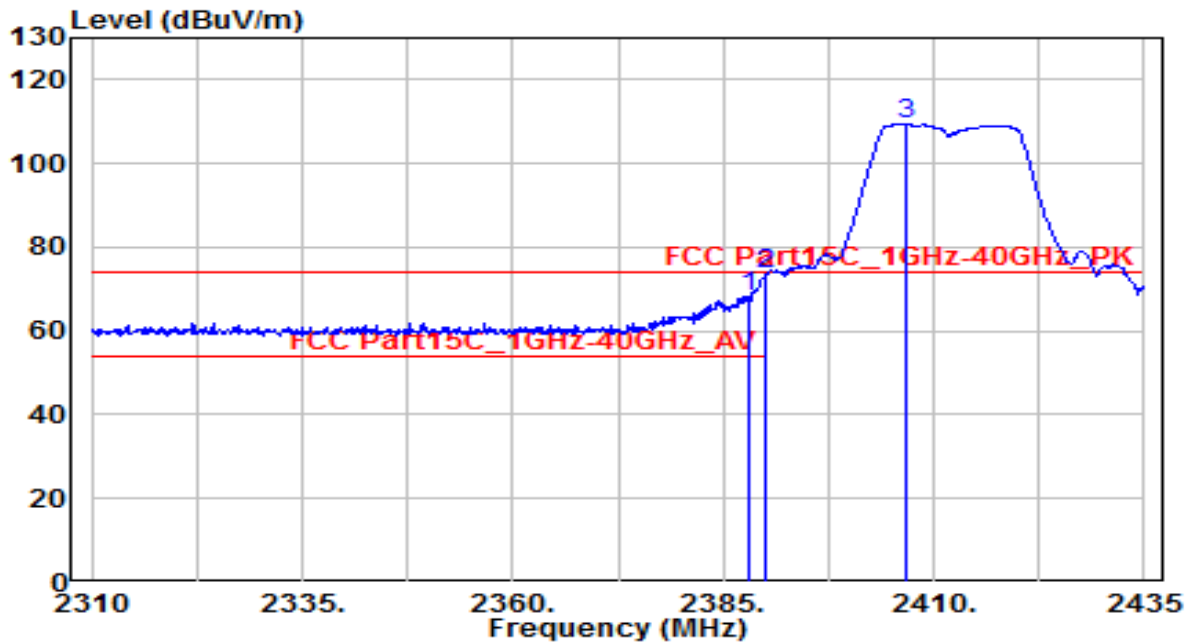


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	36.05	32.28	68.33	-5.67	74.00	100	285	Peak
2	* 2390.000	41.48	32.28	73.76	-0.24	74.00	100	285	Peak
3	2406.625	77.05	32.34	109.40	N/A	N/A	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

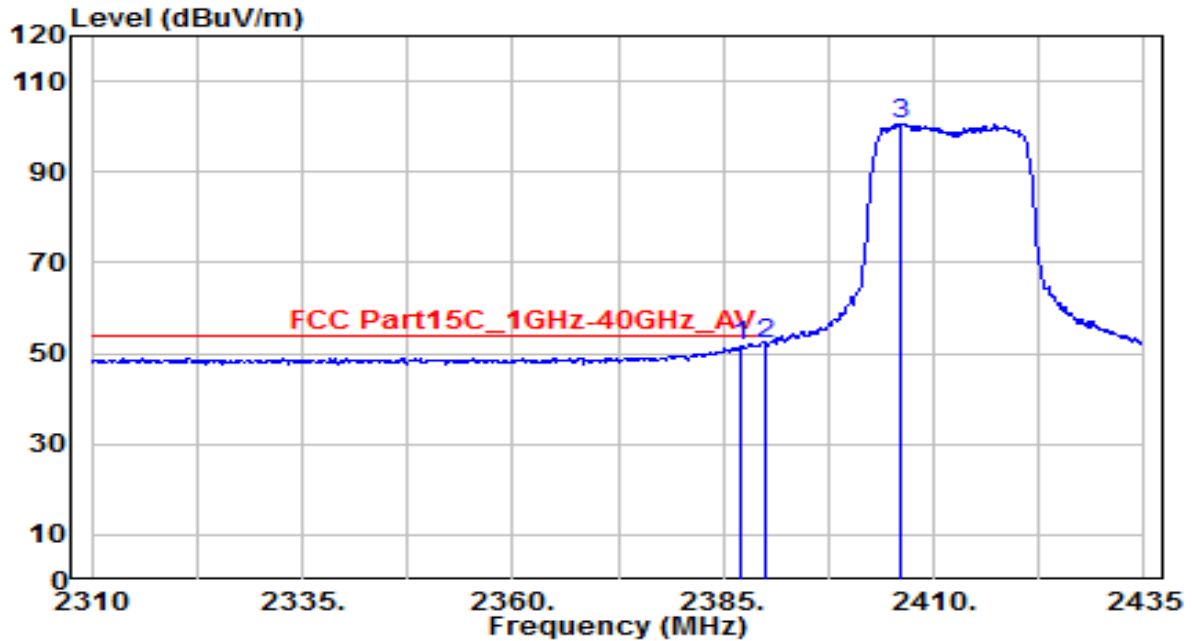


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.125	19.31	32.27	51.58	-2.42	54.00	100	285	Average
2	* 2390.000	19.86	32.28	52.15	-1.85	54.00	100	285	Average
3	2406.125	68.33	32.34	100.68	N/A	N/A	100	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

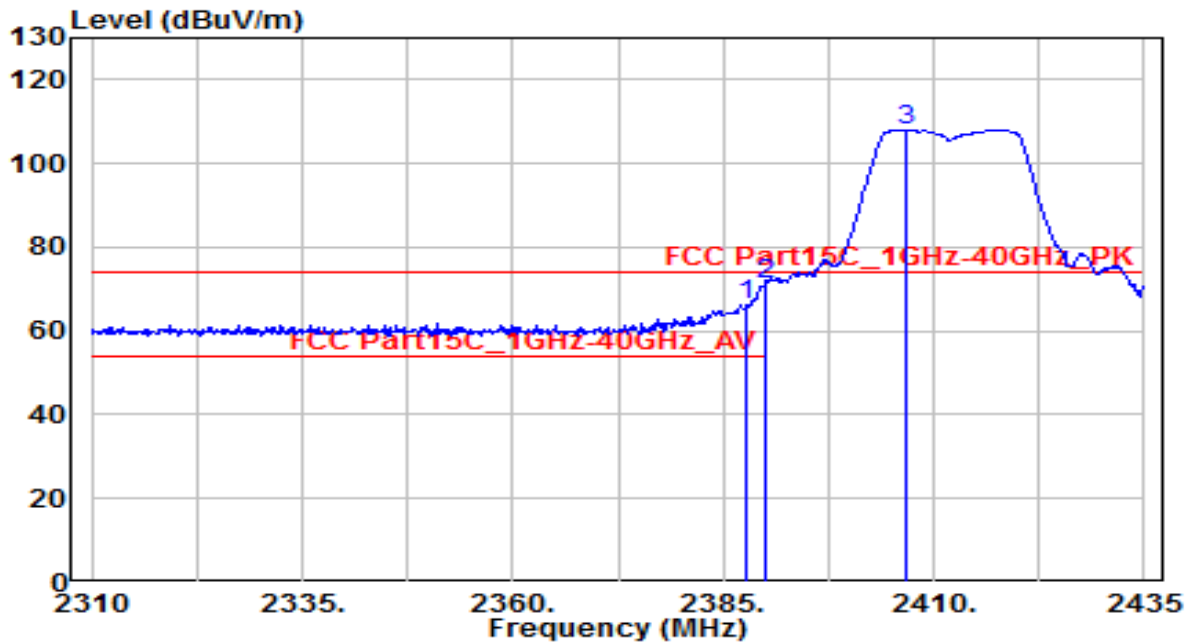


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.750	34.01	32.28	66.28	-7.72	74.00	220	265	Peak
2	* 2390.000	38.98	32.28	71.26	-2.74	74.00	220	265	Peak
3	2406.750	75.68	32.34	108.02	N/A	N/A	220	265	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	By Notebook PC

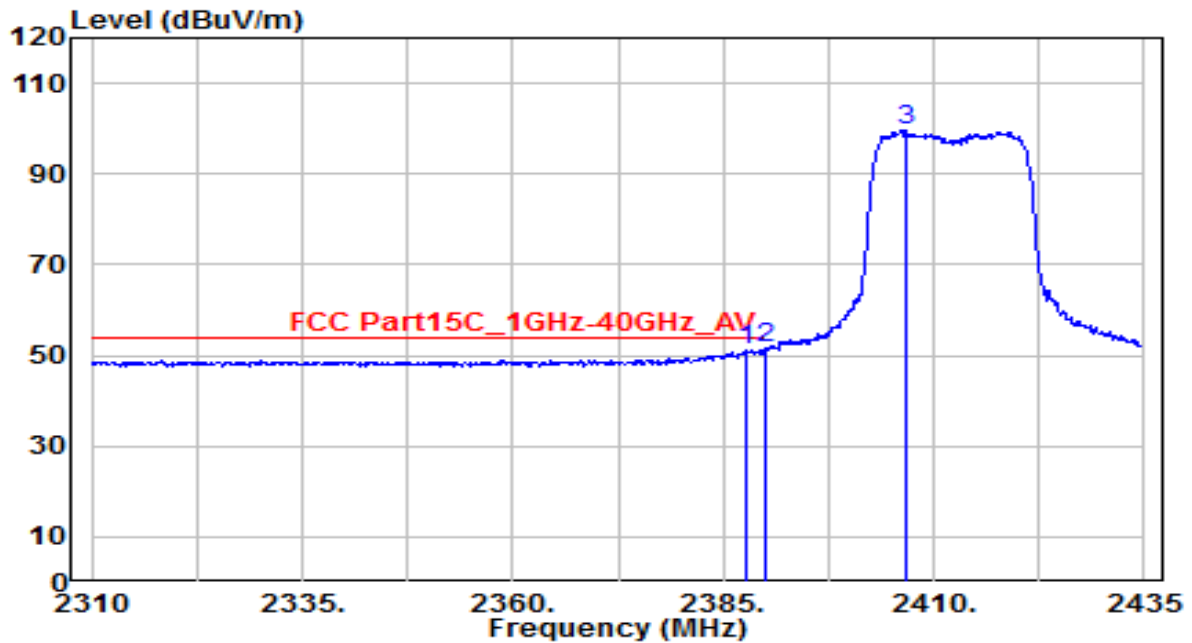


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	18.72	32.28	50.99	-3.01	54.00	220	265	Average
2	* 2390.000	19.19	32.28	51.48	-2.52	54.00	220	265	Average
3	2406.625	67.12	32.34	99.47	N/A	N/A	220	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

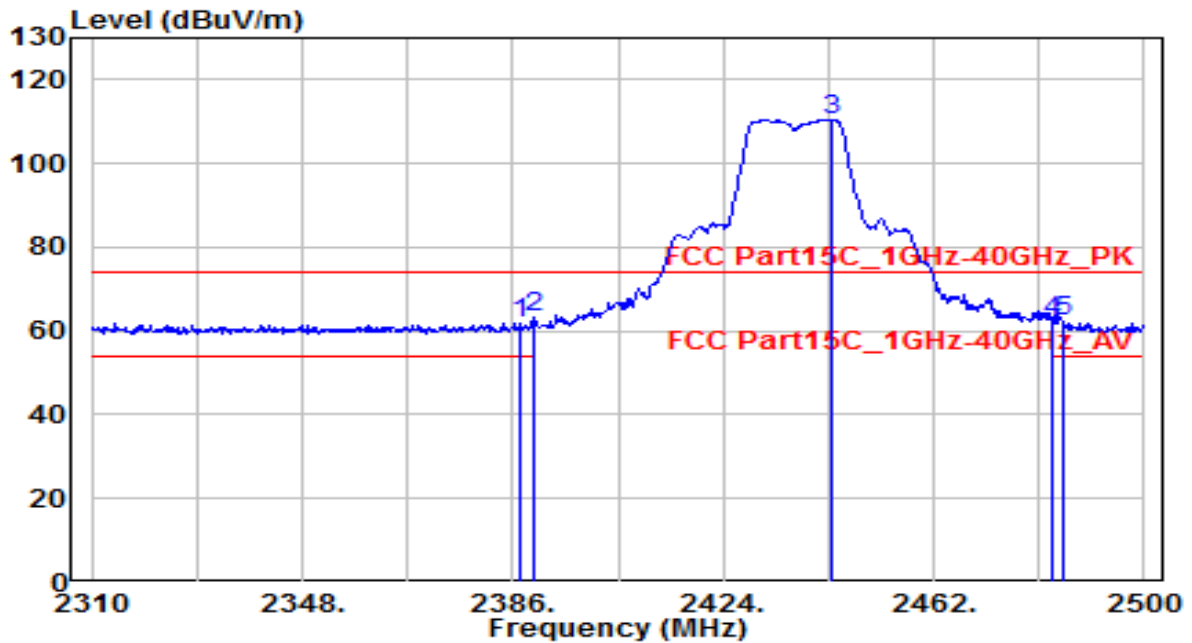


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	29.71	32.27	61.99	-12.01	74.00	150	285	Peak
2	* 2390.000	31.11	32.28	63.39	-10.61	74.00	150	285	Peak
3	2443.570	78.00	32.48	110.48	N/A	N/A	150	285	Peak
4	2483.500	29.49	32.62	62.11	-11.89	74.00	150	285	Peak
5	2485.180	29.85	32.63	62.48	-11.52	74.00	150	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

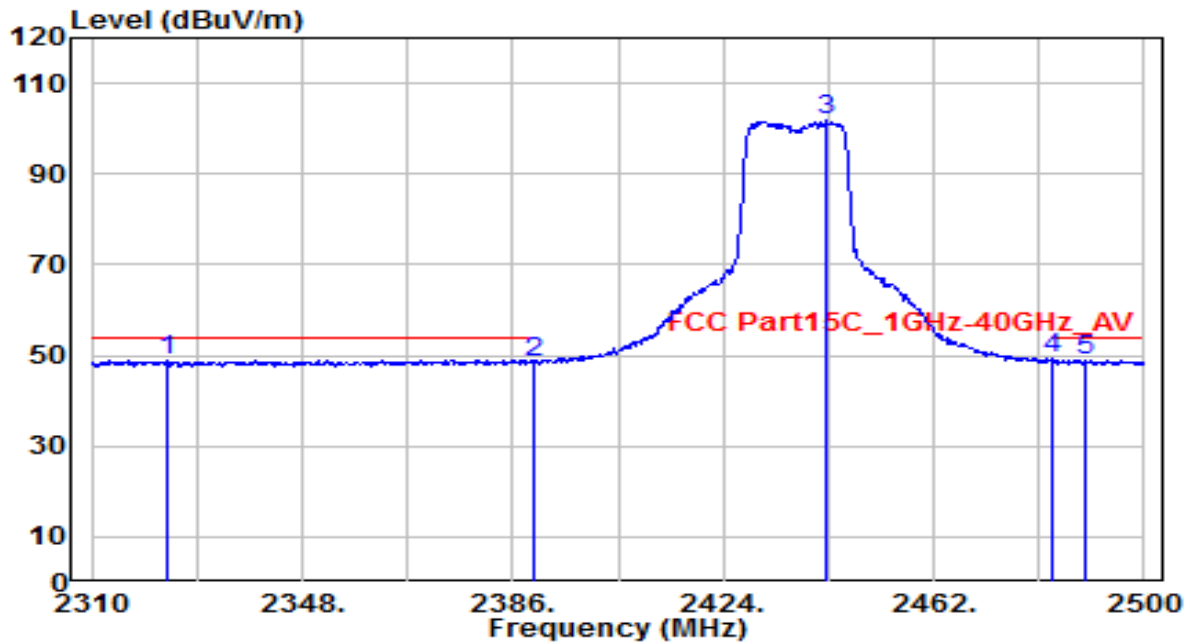


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2323.680	16.96	32.05	49.01	-4.99	54.00	150	285	Average
2	2390.000	16.22	32.28	48.50	-5.50	54.00	150	285	Average
3	2442.810	69.45	32.47	101.92	N/A	N/A	150	285	Average
4	* 2483.500	16.61	32.62	49.23	-4.77	54.00	150	285	Average
5	2489.360	16.32	32.64	48.96	-5.04	54.00	150	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

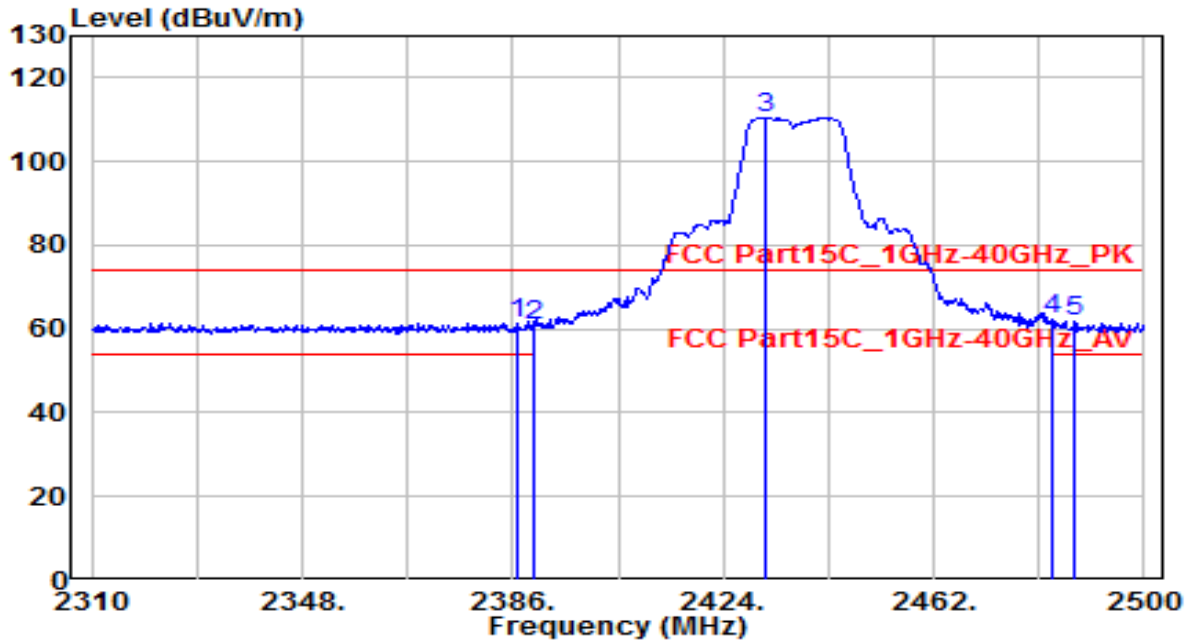


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	29.11	32.27	61.39	-12.61	74.00	220	265	Peak
2	2390.000	28.50	32.28	60.79	-13.21	74.00	220	265	Peak
3	2431.790	77.98	32.43	110.41	N/A	N/A	220	265	Peak
4	* 2483.500	29.55	32.62	62.17	-11.83	74.00	220	265	Peak
5	2487.460	29.10	32.63	61.73	-12.27	74.00	220	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	By Notebook PC

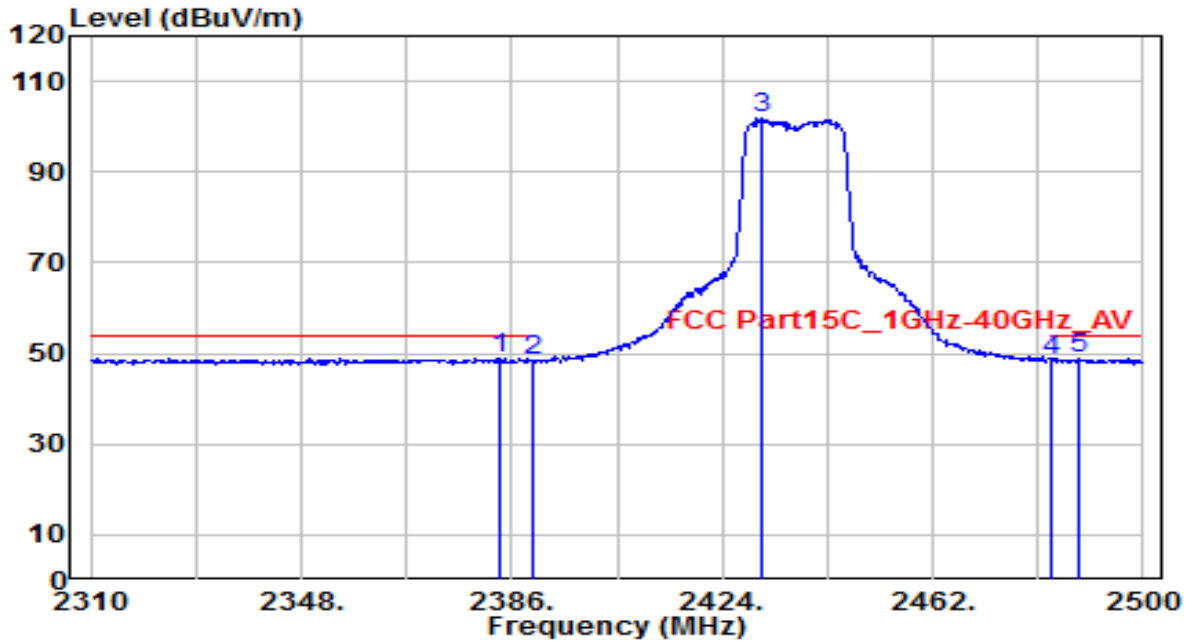


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2383.910	16.57	32.26	48.84	-5.16	54.00	220	265	Average
2	2390.000	16.39	32.28	48.67	-5.33	54.00	220	265	Average
3	2431.220	69.39	32.43	101.82	N/A	N/A	220	265	Average
4	2483.500	15.86	32.62	48.48	-5.52	54.00	220	265	Average
5	2488.410	16.15	32.64	48.79	-5.21	54.00	220	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

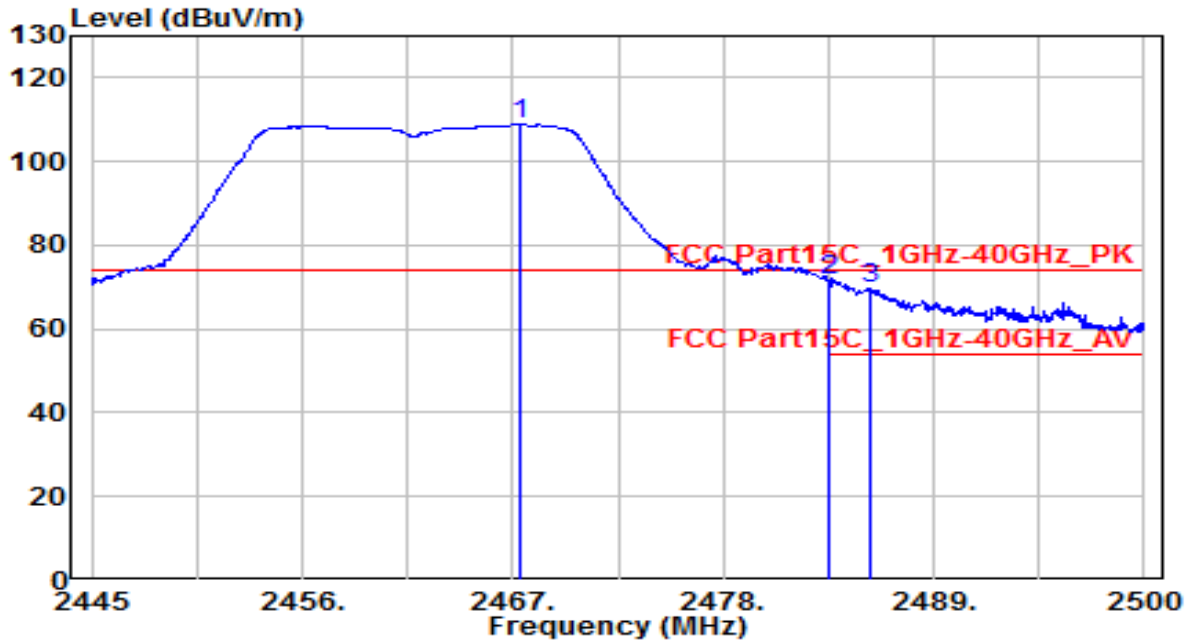


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.440	76.16	32.56	108.73	N/A	N/A	160	285	Peak
2	* 2483.500	39.02	32.62	71.64	-2.36	74.00	160	285	Peak
3	2485.645	37.20	32.63	69.82	-4.18	74.00	160	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

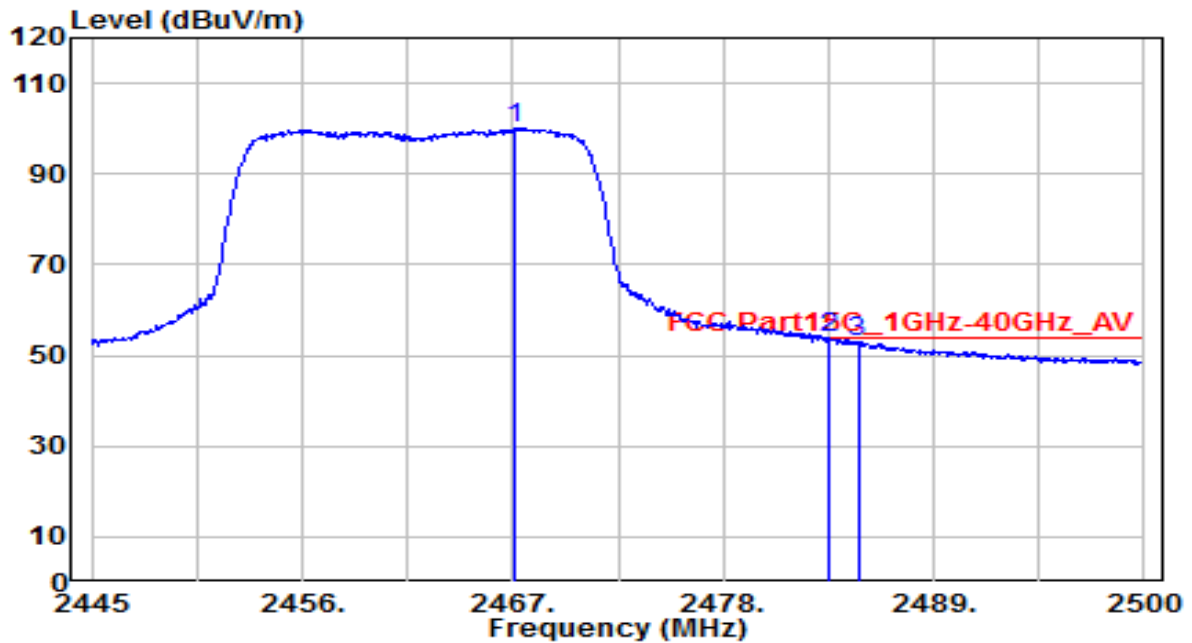


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.165	67.50	32.56	100.07	N/A	N/A	160	285	Average
2	* 2483.500	21.24	32.62	53.86	-0.14	54.00	160	285	Average
3	2485.040	20.23	32.63	52.86	-1.14	54.00	160	285	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

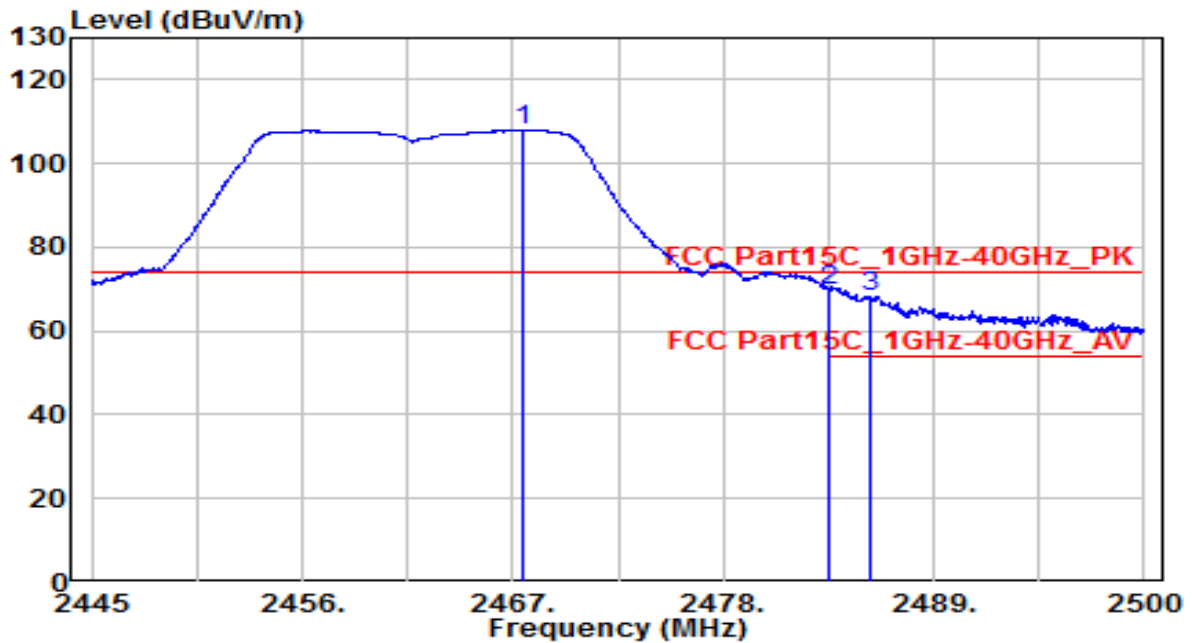


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.495	75.37	32.56	107.93	N/A	N/A	215	265	Peak
2	* 2483.500	37.13	32.62	69.75	-4.25	74.00	215	265	Peak
3	2485.645	35.75	32.63	68.38	-5.62	74.00	215	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	By Notebook PC

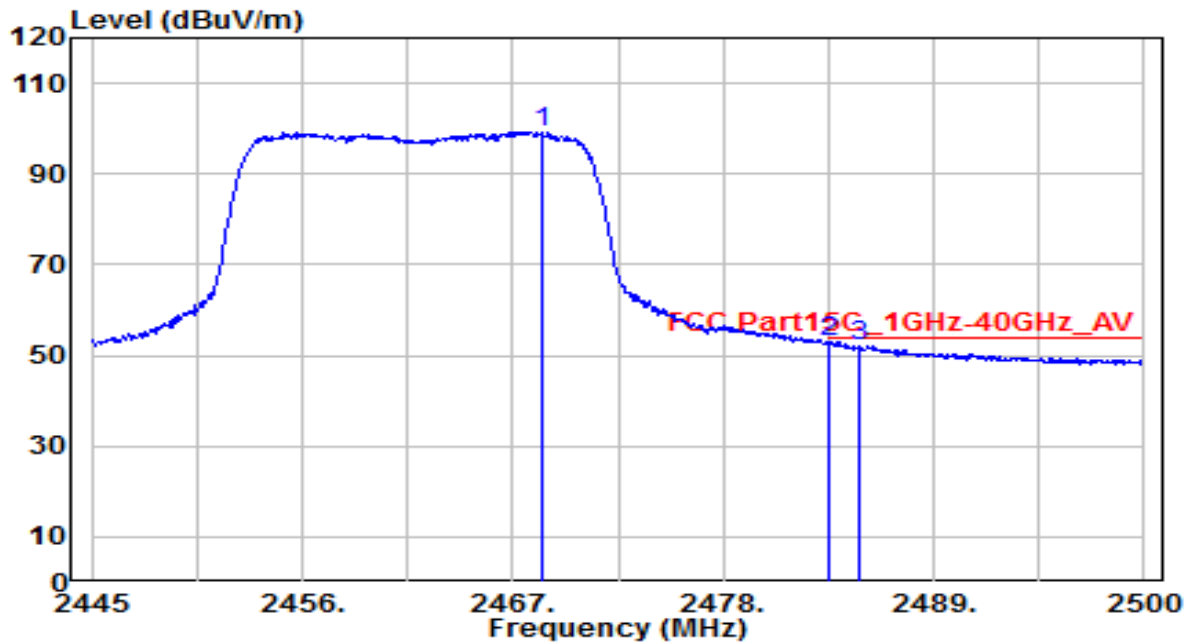


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.540	66.69	32.57	99.26	N/A	N/A	215	265	Average
2	* 2483.500	20.41	32.62	53.03	-0.97	54.00	215	265	Average
3	2485.095	19.39	32.63	52.02	-1.98	54.00	215	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	By Notebook PC

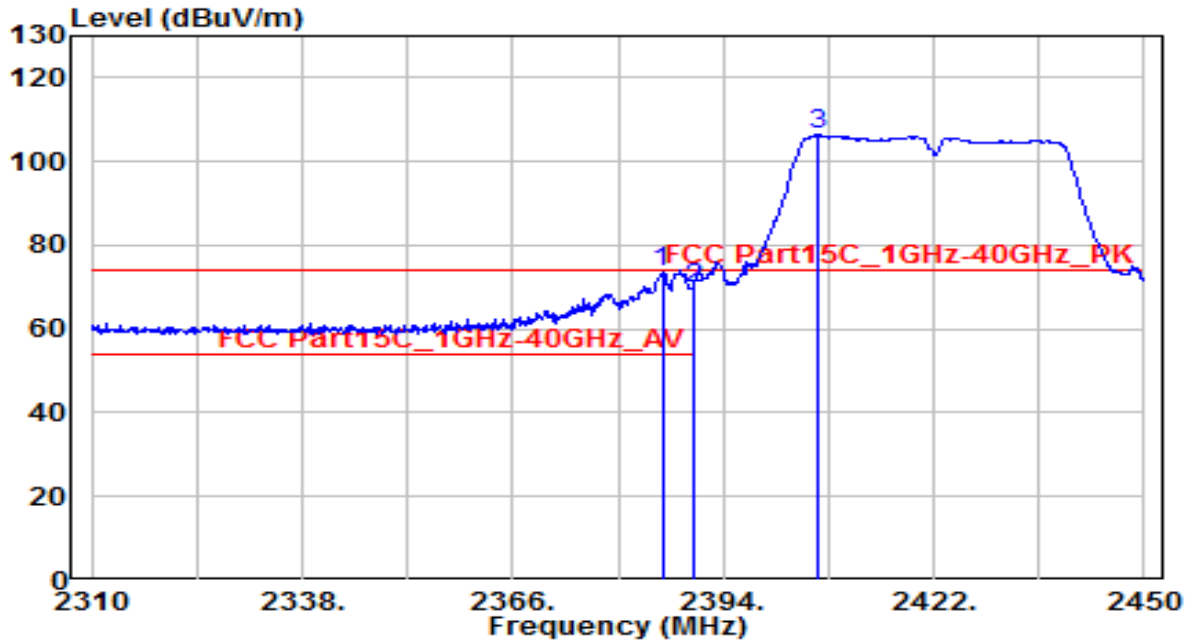


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2385.880	41.48	32.27	73.75	-0.25	74.00	100	285	Peak
2	2390.000	37.48	32.28	69.77	-4.23	74.00	100	285	Peak
3	2406.740	73.92	32.34	106.27	N/A	N/A	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	By Notebook PC

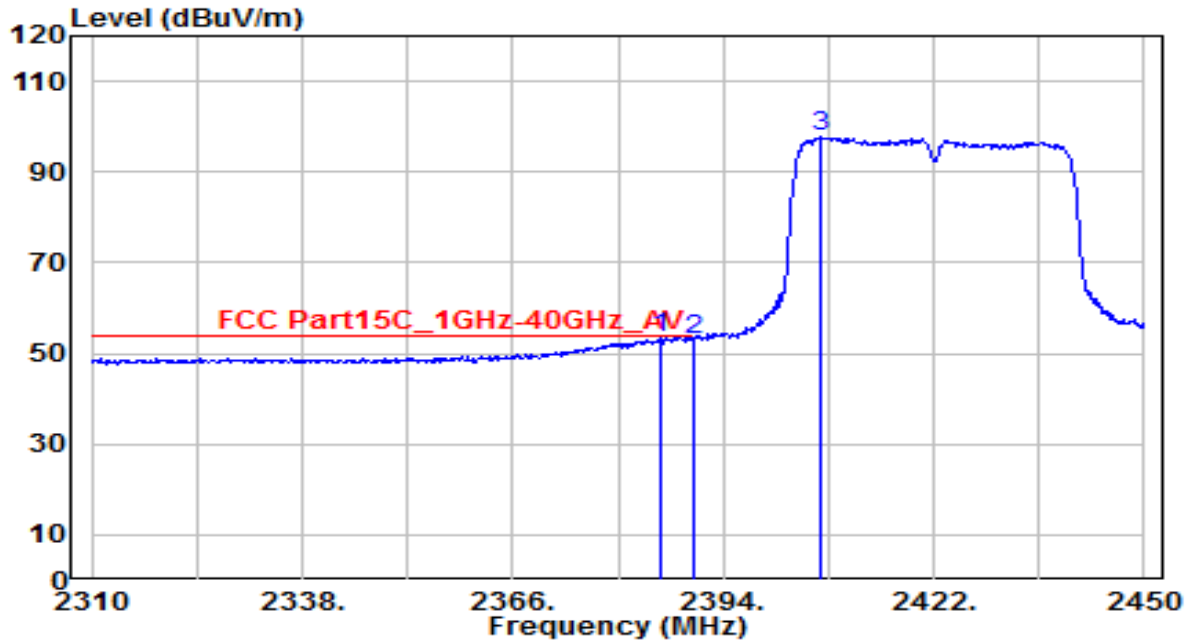


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2385.740	21.04	32.27	53.31	-0.69	54.00	100	285	Average
2	2390.000	20.91	32.28	53.19	-0.81	54.00	100	285	Average
3	2406.880	65.30	32.34	97.64	N/A	N/A	100	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	By Notebook PC

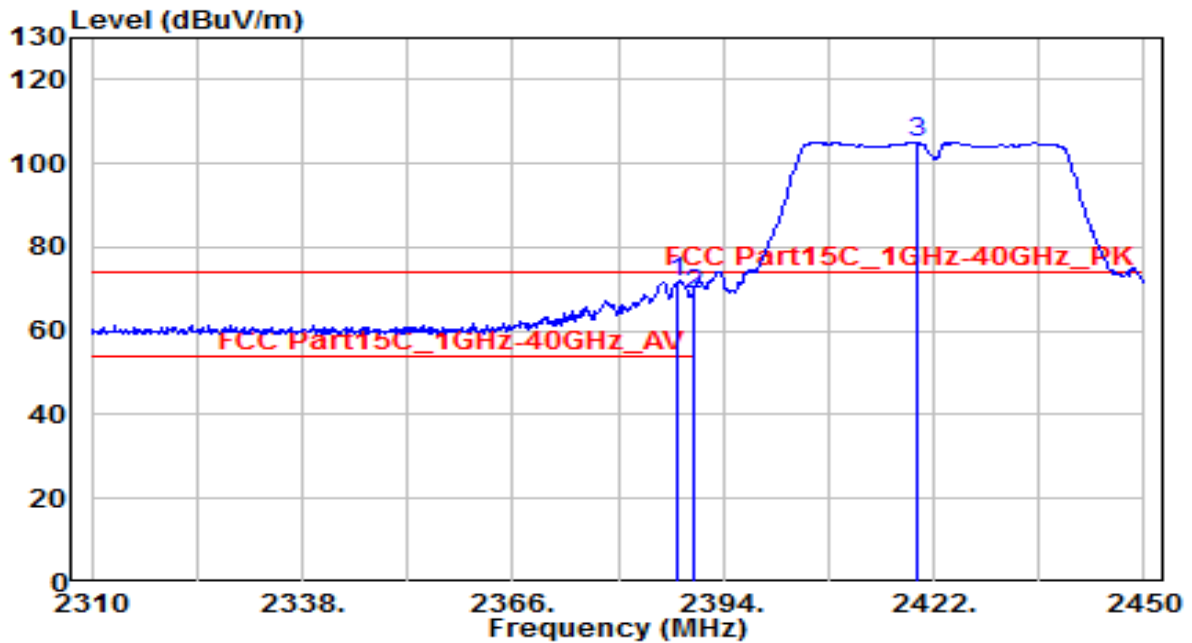


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.840	39.41	32.28	71.69	-2.31	74.00	220	265	Peak
2	2390.000	36.41	32.28	68.69	-5.31	74.00	220	265	Peak
3	2419.760	72.83	32.39	105.23	N/A	N/A	220	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	By Notebook PC

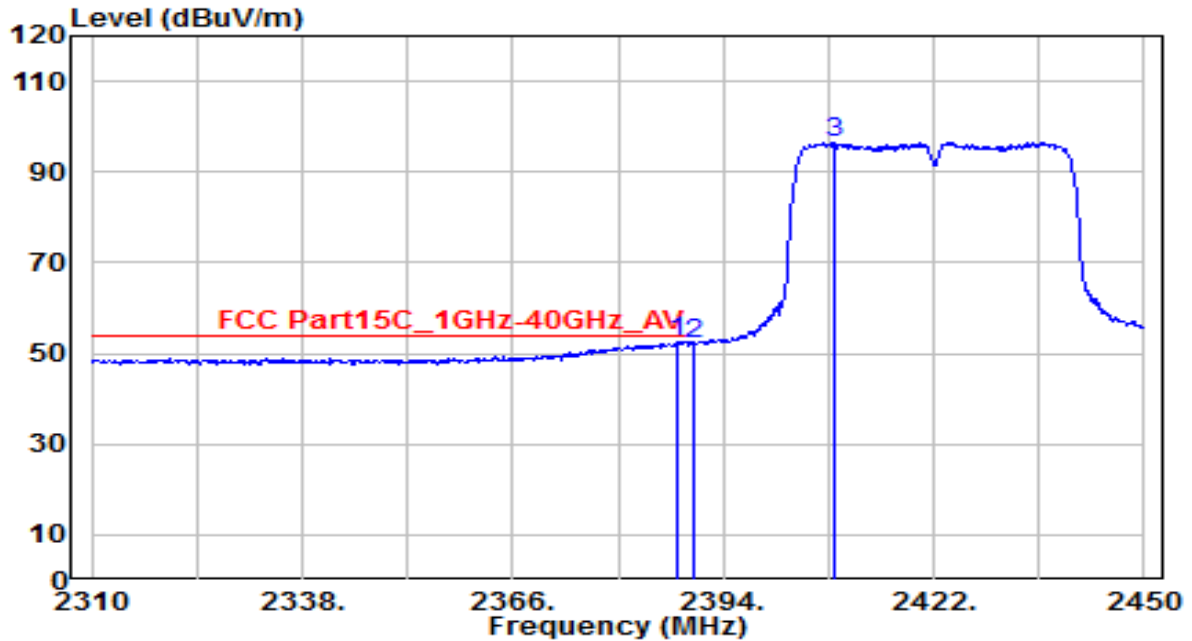


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.980	20.30	32.28	52.57	-1.43	54.00	220	265	Average
2	2390.000	19.93	32.28	52.22	-1.78	54.00	220	265	Average
3	2408.840	64.11	32.35	96.46	N/A	N/A	220	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0 PW52	Test Voltage	By Notebook PC

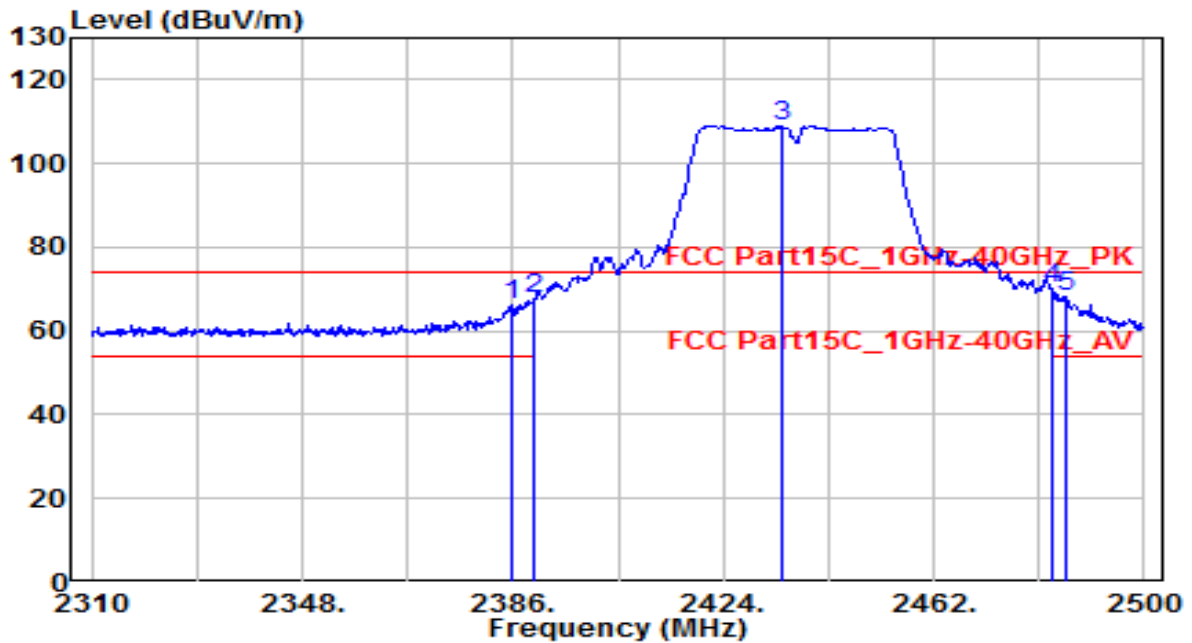


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	33.80	32.27	66.07	-7.93	74.00	135	250	Peak
2	2390.000	35.26	32.28	67.55	-6.45	74.00	135	250	Peak
3	2434.830	76.67	32.45	109.11	N/A	N/A	135	250	Peak
4	* 2483.500	37.52	32.62	70.14	-3.86	74.00	135	250	Peak
5	2486.130	35.43	32.63	68.06	-5.94	74.00	135	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0 PW52	Test Voltage	By Notebook PC

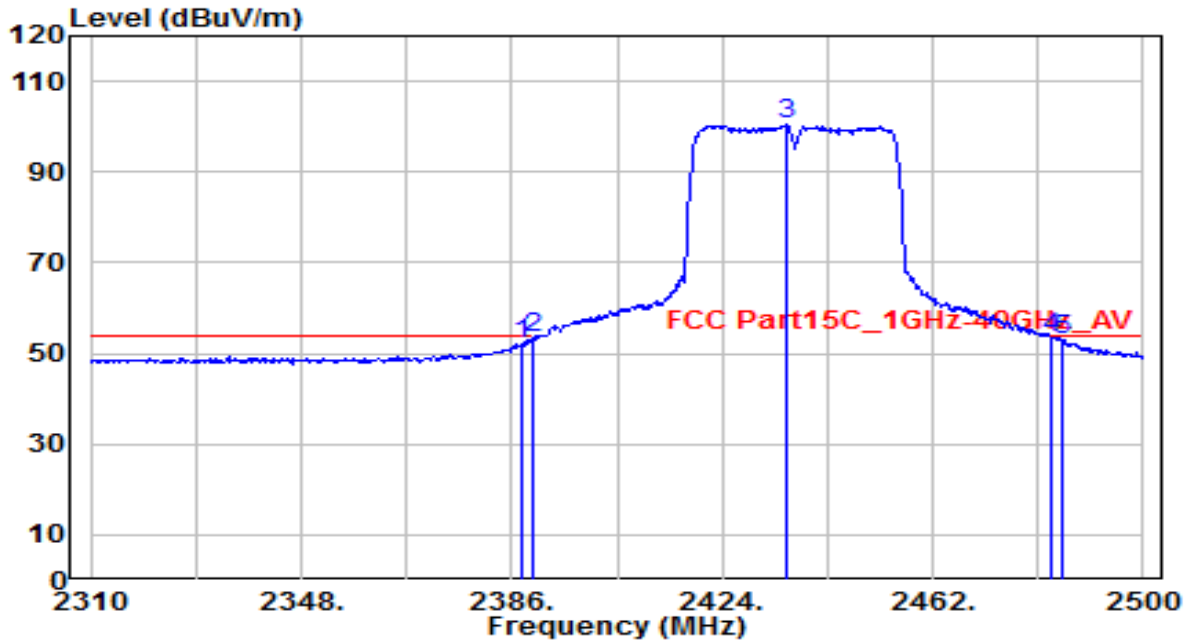


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	19.90	32.28	52.18	-1.82	54.00	135	250	Average
2	2390.000	21.23	32.28	53.51	-0.49	54.00	135	250	Average
3	2435.400	68.04	32.45	100.49	N/A	N/A	135	250	Average
4	* 2483.500	21.04	32.62	53.66	-0.34	54.00	135	250	Average
5	2485.370	20.37	32.63	53.00	-1.00	54.00	135	250	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0 PW52	Test Voltage	By Notebook PC

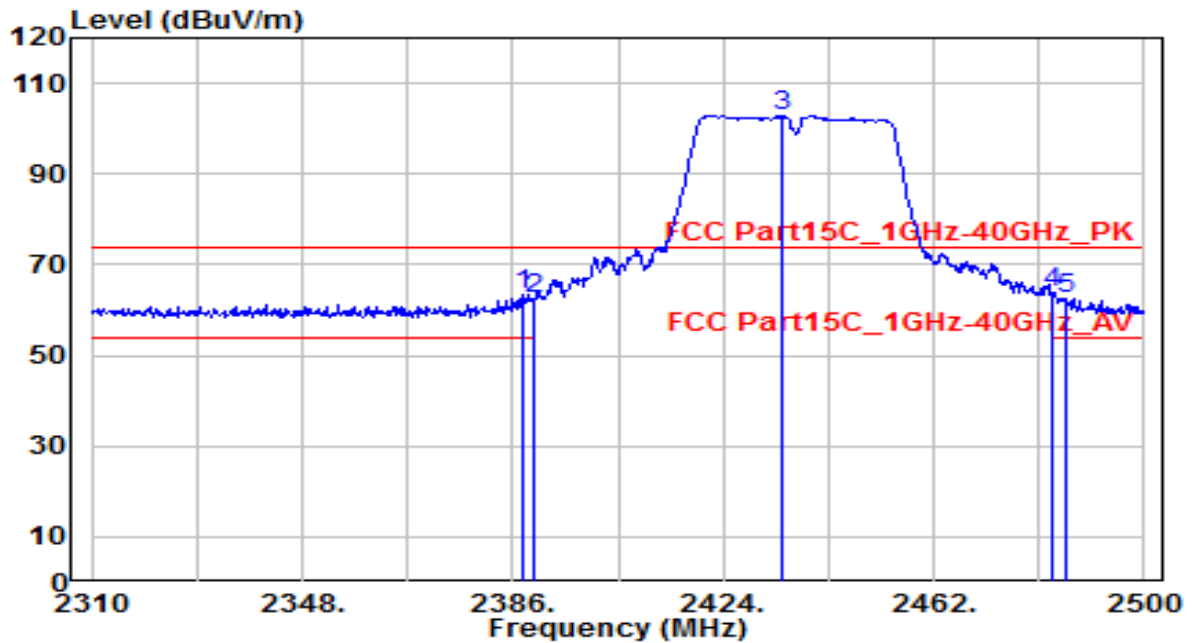


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	31.09	32.28	63.36	-10.64	74.00	300	220	Peak
2	2390.000	30.19	32.28	62.47	-11.53	74.00	300	220	Peak
3	2434.640	70.56	32.44	103.01	N/A	N/A	300	220	Peak
4	* 2483.500	31.06	32.62	63.68	-10.32	74.00	300	220	Peak
5	2485.750	29.98	32.63	62.61	-11.39	74.00	300	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0 PW52	Test Voltage	By Notebook PC

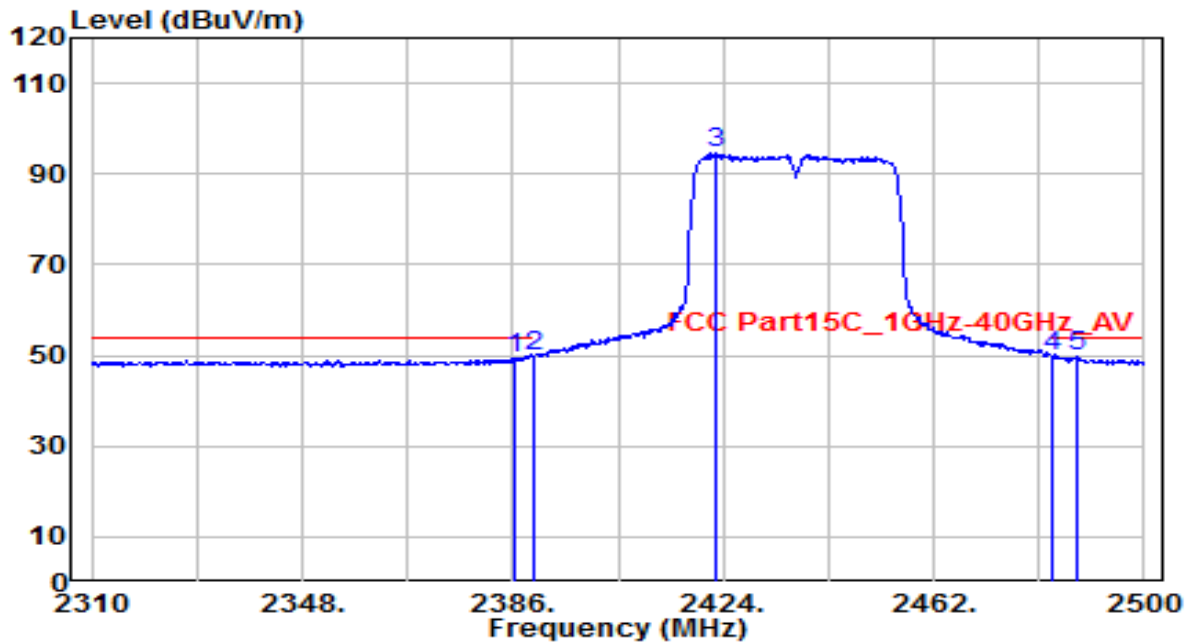


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.570	17.25	32.27	49.53	-4.47	54.00	300	220	Average
2	2390.000	17.64	32.28	49.92	-4.08	54.00	300	220	Average
3	2422.860	62.04	32.40	94.44	N/A	N/A	300	220	Average
4	* 2483.500	17.34	32.62	49.96	-4.04	54.00	300	220	Average
5	2487.650	17.12	32.64	49.75	-4.25	54.00	300	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	By Notebook PC

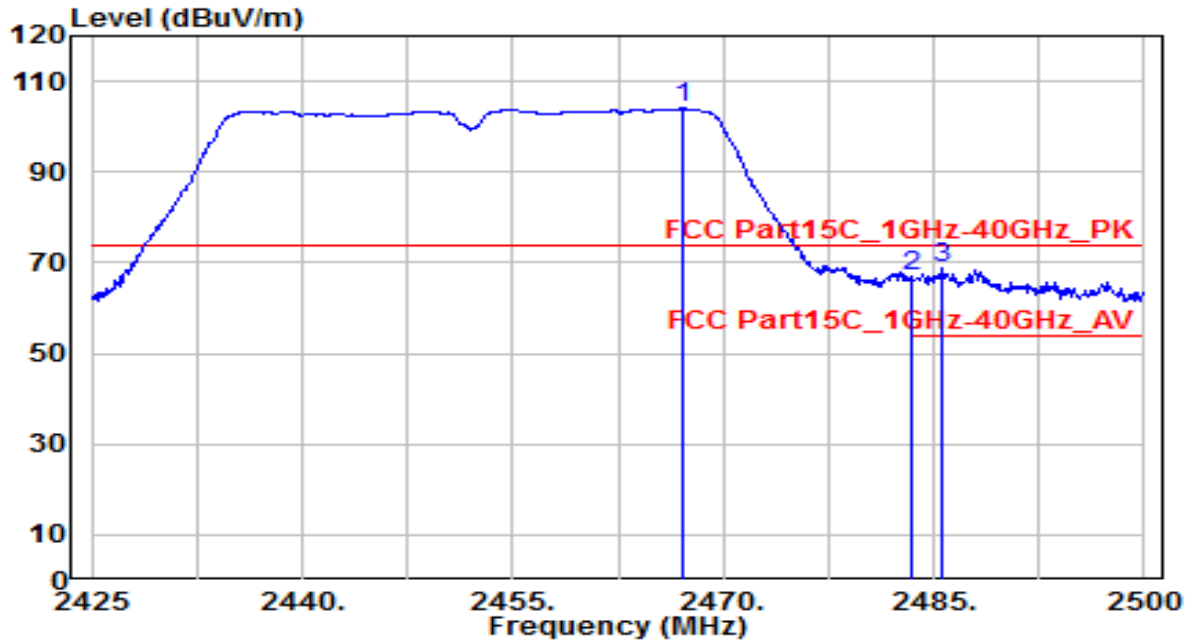


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2467.075	71.43	32.56	103.99	N/A	N/A	160	285	Peak
2	2483.500	34.20	32.62	66.82	-7.18	74.00	160	285	Peak
3	* 2485.675	36.23	32.63	68.86	-5.14	74.00	160	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	By Notebook PC

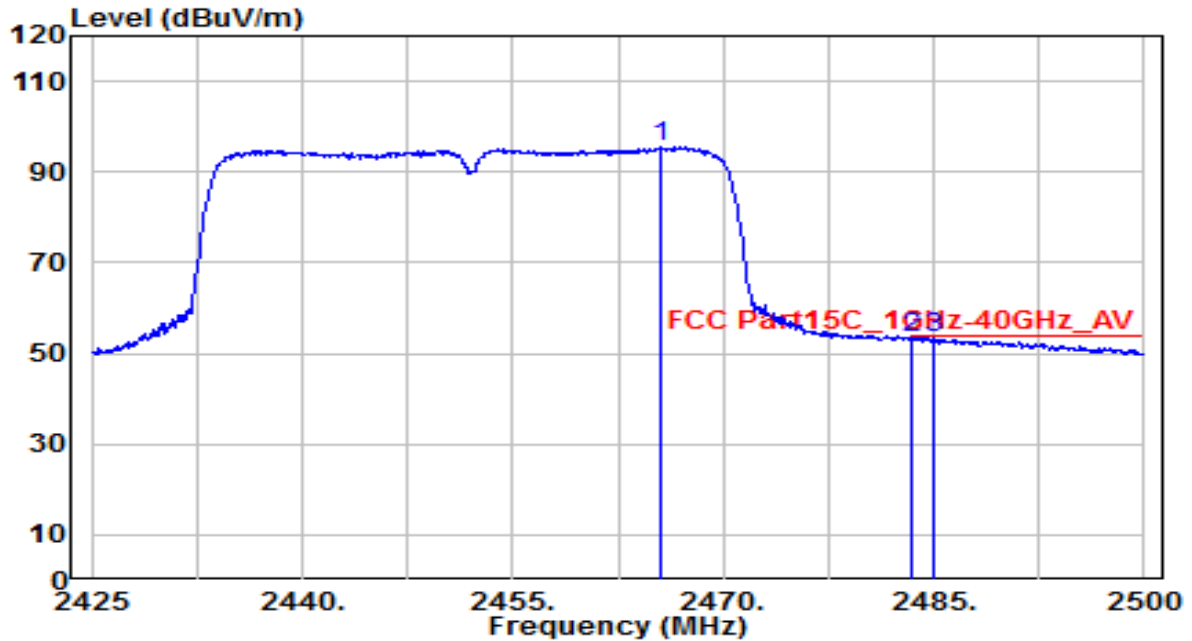


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.575	62.84	32.56	95.39	N/A	N/A	160	285	Average
2	* 2483.500	20.93	32.62	53.55	-0.45	54.00	160	285	Average
3	2485.000	20.72	32.63	53.35	-0.65	54.00	160	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	By Notebook PC

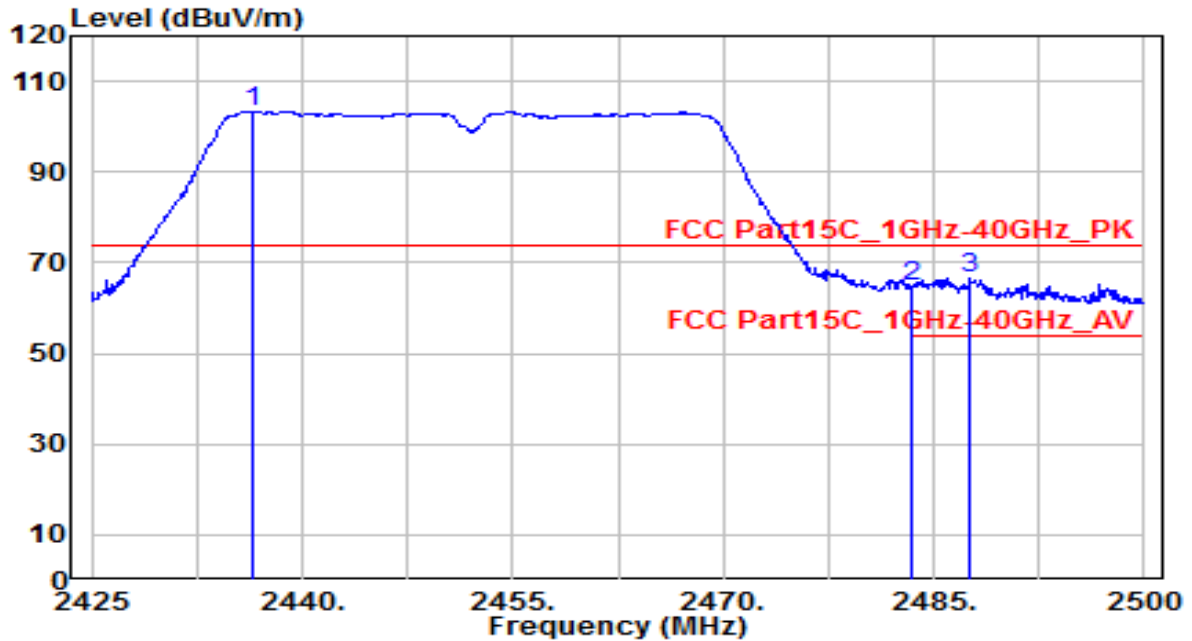


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2436.550	70.87	32.45	103.32	N/A	N/A	215	265	Peak
2	2483.500	32.34	32.62	64.96	-9.04	74.00	215	265	Peak
3	* 2487.550	33.83	32.64	66.47	-7.53	74.00	215	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-23
Factor	BBHA 9120D	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	By Notebook PC

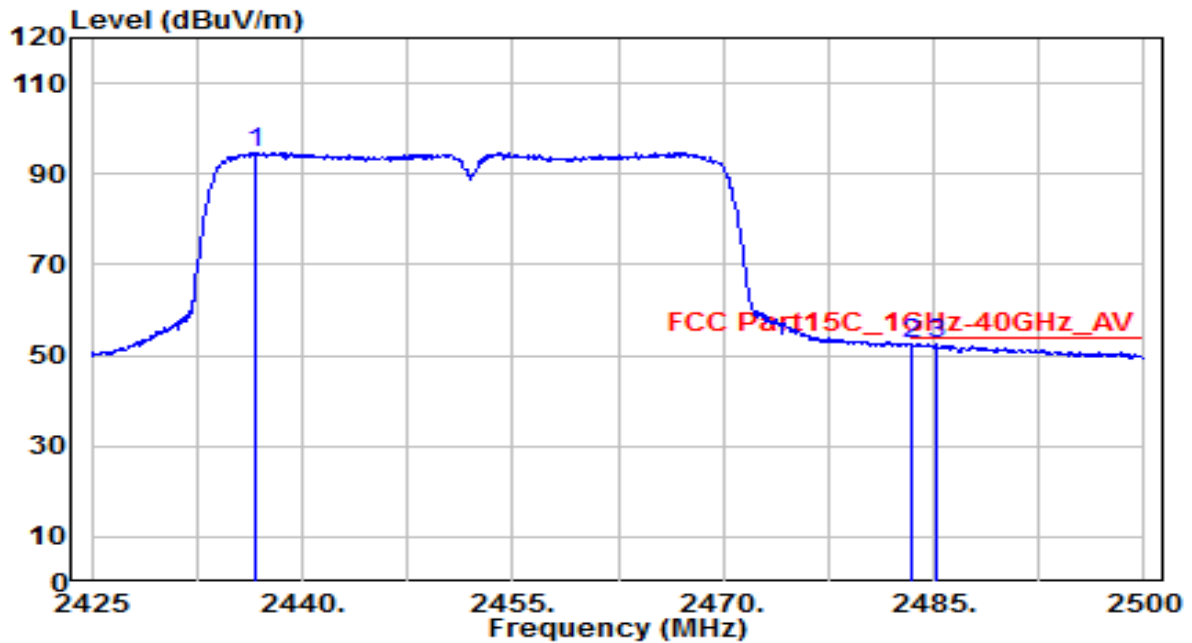

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2436.625	62.41	32.45	94.86	N/A	N/A	215	265	Average
2	* 2483.500	19.99	32.62	52.61	-1.39	54.00	215	265	Average
3	2485.150	19.75	32.63	52.38	-1.62	54.00	215	265	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

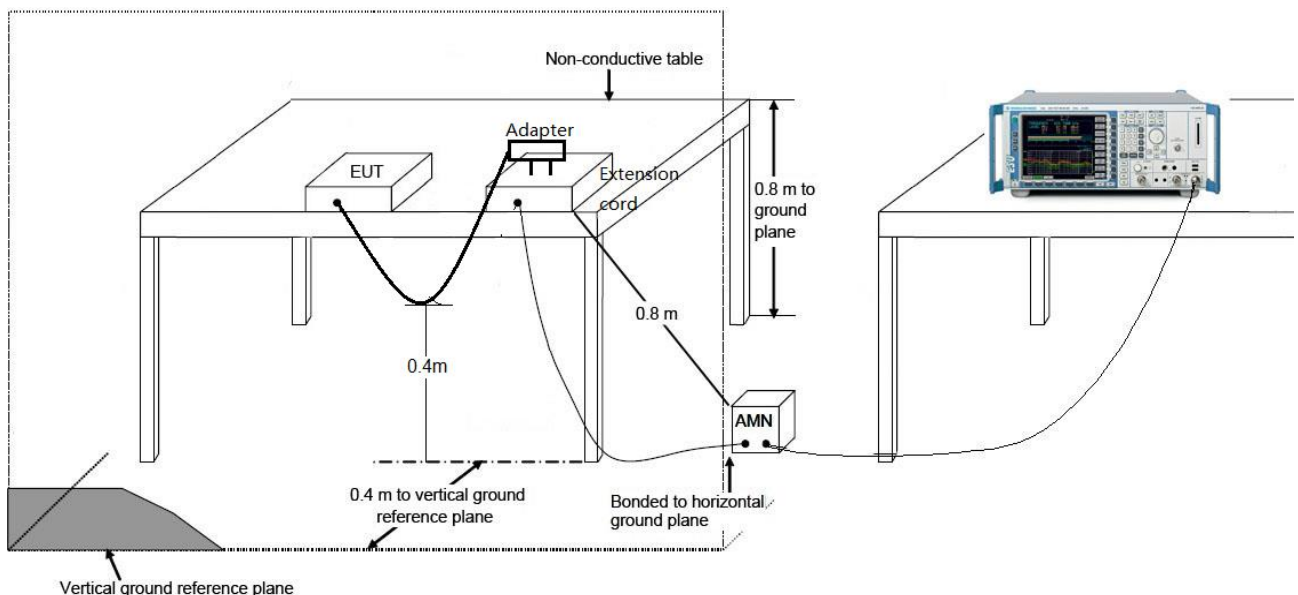

7.8.3. Test Result

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.2°C / 63%
Polarity	Line1	Site / Test Engineer	SR2 / Jeff
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/ 60Hz

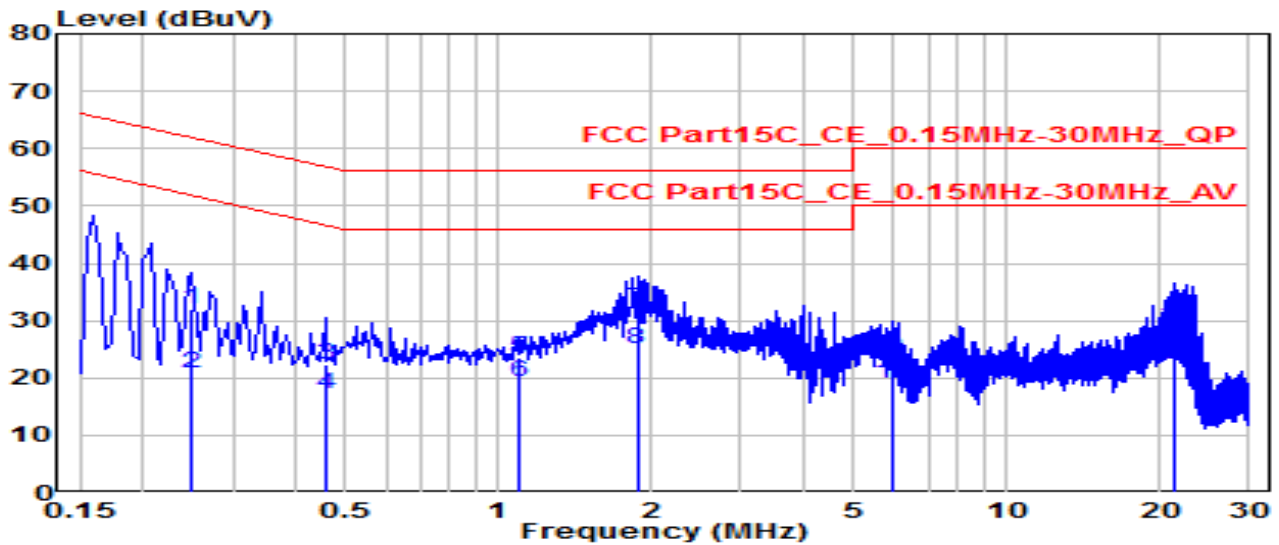


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.249	22.28	9.63	31.91	-29.88	61.79	QP
2	0.249	11.30	9.63	20.93	-30.86	51.79	Average
3	0.456	12.72	9.64	22.36	-34.41	56.77	QP
4	0.456	7.42	9.64	17.06	-29.71	46.77	Average
5	1.090	13.91	9.67	23.58	-32.42	56.00	QP
6	1.090	9.55	9.67	19.22	-26.78	46.00	Average
7	* 1.873	22.40	9.69	32.09	-23.91	56.00	QP
8	* 1.873	15.28	9.69	24.96	-21.04	46.00	Average
9	5.954	13.69	9.77	23.46	-36.54	60.00	QP
10	5.954	9.26	9.77	19.03	-30.97	50.00	Average
11	21.541	19.09	9.92	29.02	-30.98	60.00	QP
12	21.541	12.28	9.92	22.20	-27.80	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.2°C /63%
Polarity	Neutral	Site / Test Engineer	SR2 / Jeff
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/ 60Hz

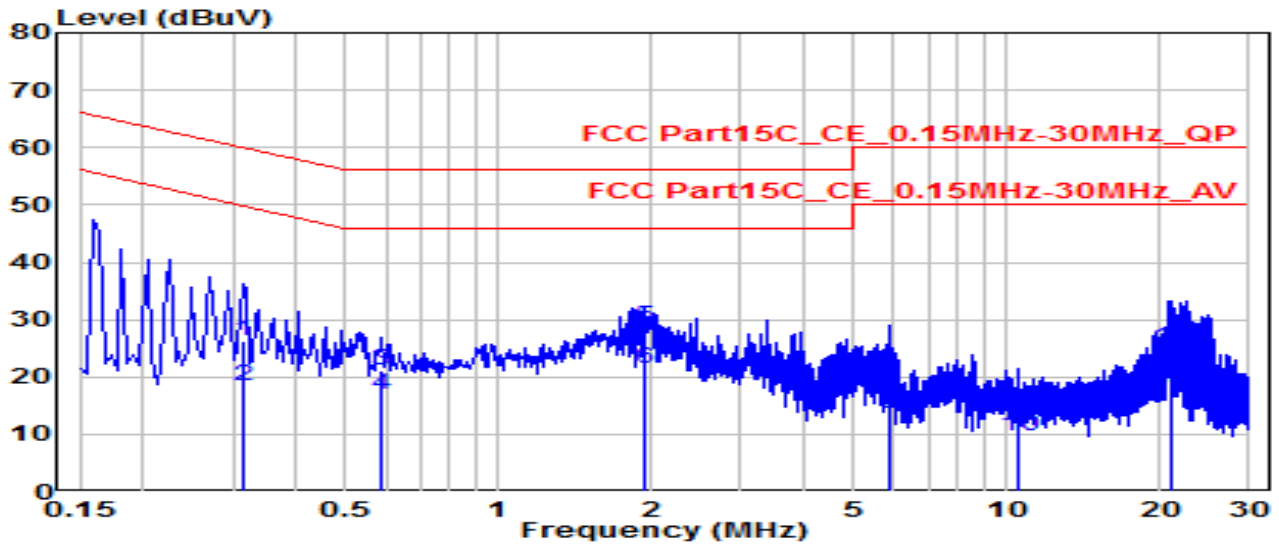


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.316	16.78	9.63	26.41	-33.39	59.80	QP
2	0.316	8.90	9.63	18.53	-31.27	49.80	Average
3	0.591	11.38	9.65	21.03	-34.97	56.00	QP
4	0.591	7.20	9.65	16.85	-29.15	46.00	Average
5	*	1.932	9.69	28.57	-27.43	56.00	QP
6	*	1.932	9.69	21.52	-24.48	46.00	Average
7	5.905	9.67	9.77	19.44	-40.56	60.00	QP
8	5.905	3.92	9.77	13.69	-36.31	50.00	Average
9	10.526	3.30	9.88	13.18	-46.82	60.00	QP
10	10.526	-0.18	9.88	9.69	-40.31	50.00	Average
11	21.059	14.99	10.00	24.99	-35.01	60.00	QP
12	21.059	8.03	10.00	18.04	-31.96	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.2°C / 63%
Polarity	Line1	Site / Test Engineer	SR2 / Jeff
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 240V/ 60Hz

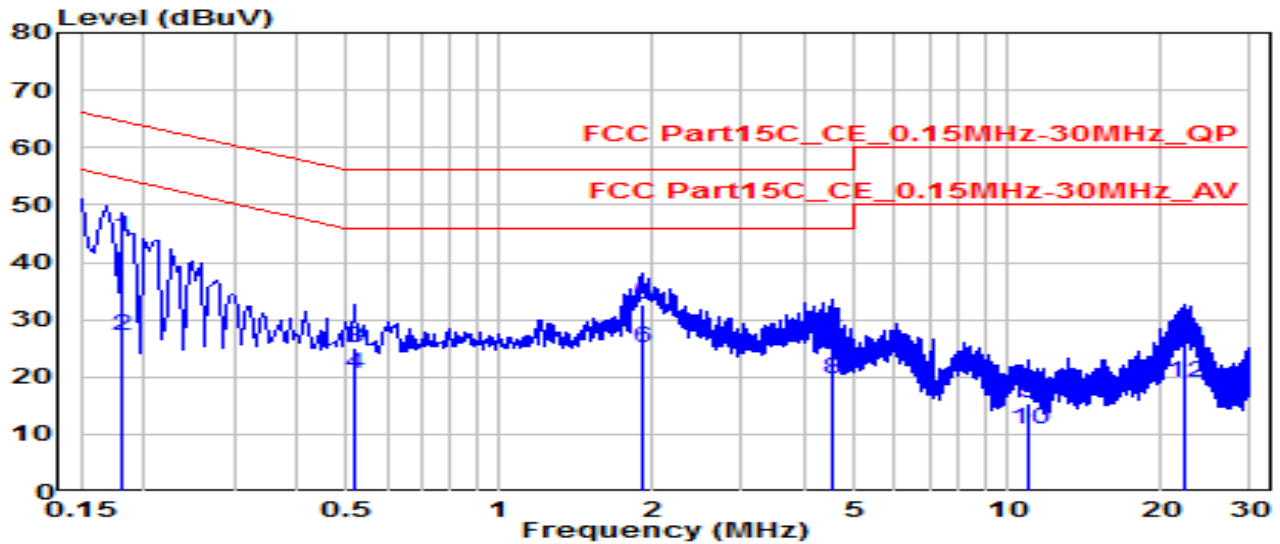


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 0.181	34.68	9.62	44.30	-20.12	64.42	QP
2	* 0.181	17.58	9.62	27.20	-27.21	54.42	Average
3	0.519	15.27	9.64	24.91	-31.09	56.00	QP
4	0.519	10.76	9.64	20.41	-25.59	46.00	Average
5	1.923	23.03	9.69	32.72	-23.28	56.00	QP
6	1.923	15.40	9.69	25.09	-20.91	46.00	Average
7	4.492	16.62	9.74	26.35	-29.65	56.00	QP
8	4.492	9.92	9.74	19.66	-26.34	46.00	Average
9	10.976	5.53	9.87	15.40	-44.60	60.00	QP
10	10.976	1.11	9.87	10.97	-39.03	50.00	Average
11	22.351	15.27	9.92	25.19	-34.81	60.00	QP
12	22.351	9.00	9.92	18.92	-31.08	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AC600 Nano Wi-Fi Bluetooth 4.2 USB Adapter	Date of Test	2022-04-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.2°C / 63%
Polarity	Neutral	Site / Test Engineer	SR2 / Jeff
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 240V/ 60Hz

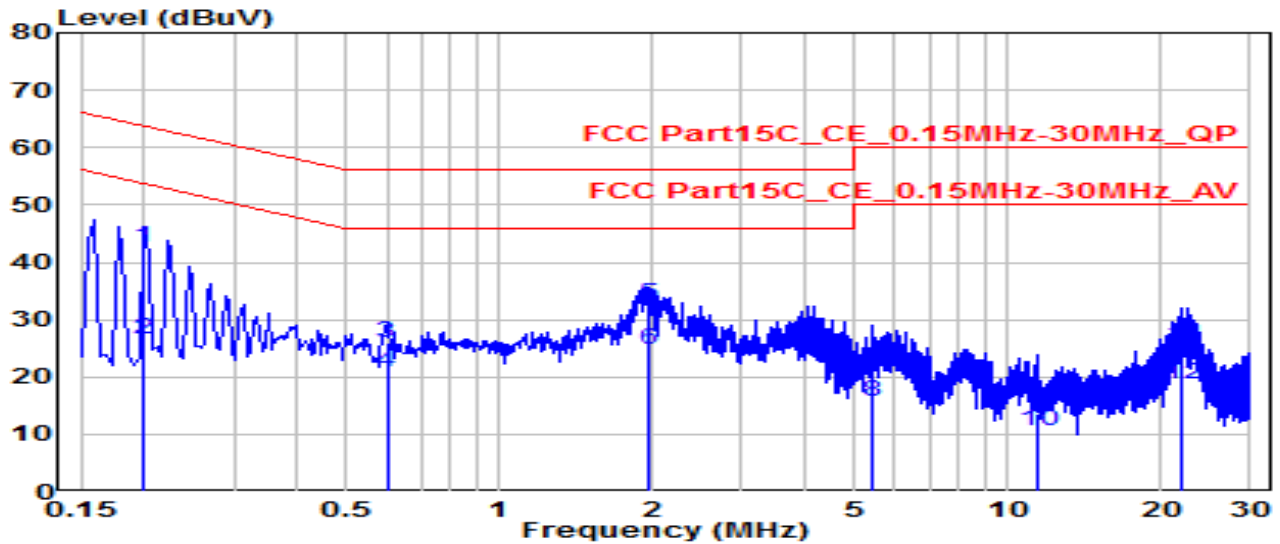

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	33.03	9.62	42.65	-20.98	63.63	QP
2	*	16.89	9.62	26.52	-27.12	53.63	Average
3		16.35	9.65	26.00	-30.00	56.00	QP
4		11.11	9.65	20.75	-25.25	46.00	Average
5		23.04	9.69	32.73	-23.27	56.00	QP
6		14.92	9.69	24.61	-21.39	46.00	Average
7		11.34	9.76	21.10	-38.90	60.00	QP
8		5.91	9.76	15.67	-34.33	50.00	Average
9		3.83	9.89	13.72	-46.28	60.00	QP
10		0.56	9.89	10.45	-39.55	50.00	Average
11		15.24	10.01	25.24	-34.76	60.00	QP
12		8.71	10.01	18.72	-31.28	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

————— The End —————

Appendix A : Test Setup Photograph

Refer to "Setup Photo" file.

Appendix B : External Photograph

Refer to "External Photo" file.

Appendix C : Internal Photograph

Refer to "Internal Photo" file.