



### 802.11 n20 CH01 (2412MHz)

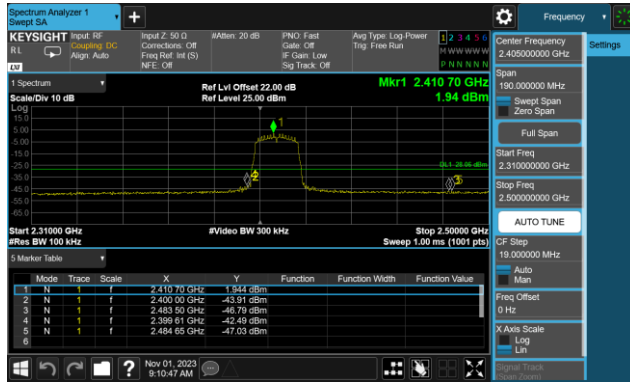


### 802.11 n20 CH01 (2412MHz)

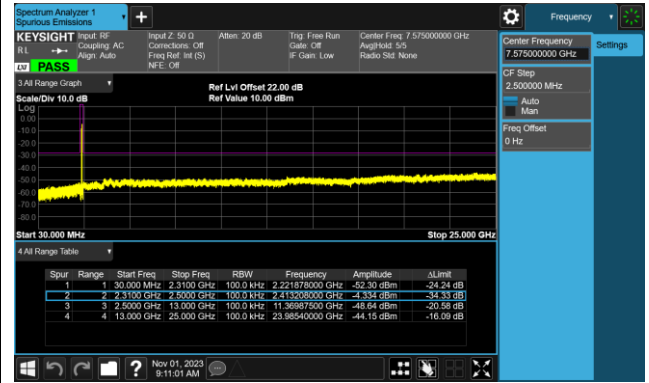

### 802.11 n20 CH06 (2437MHz)




### 802.11 n20 CH06 (2437MHz)




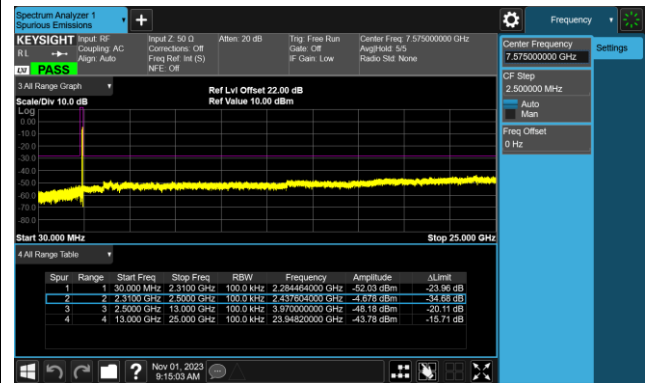



### 802.11 n20 CH11 (2462MHz)




### 802.11 n20 CH11 (2462MHz)

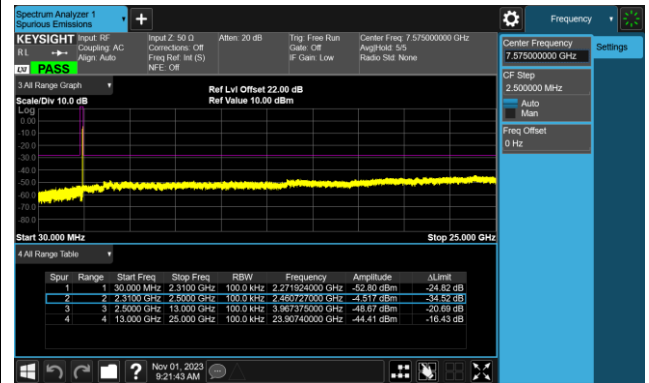

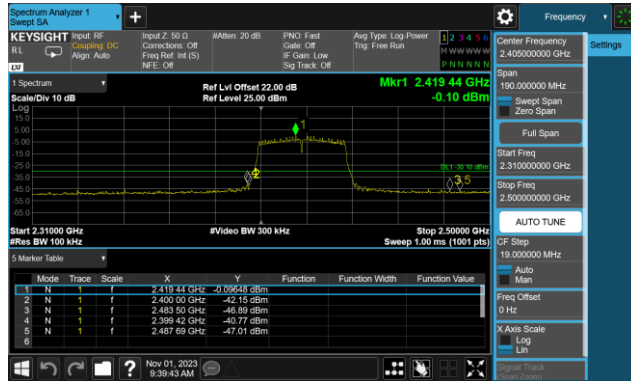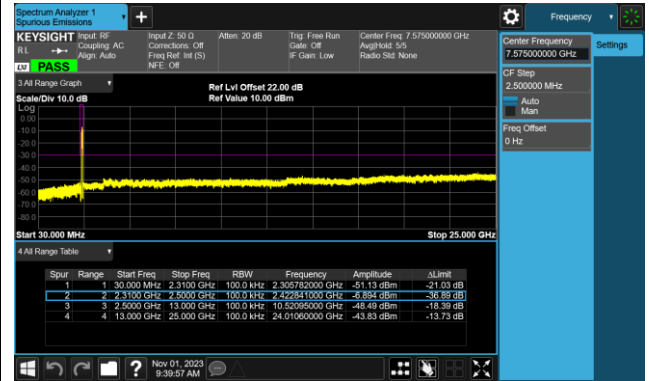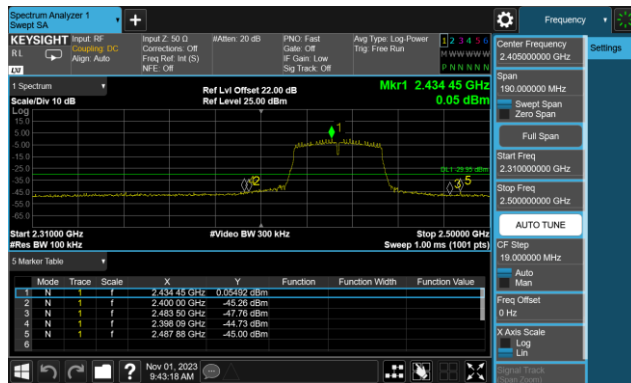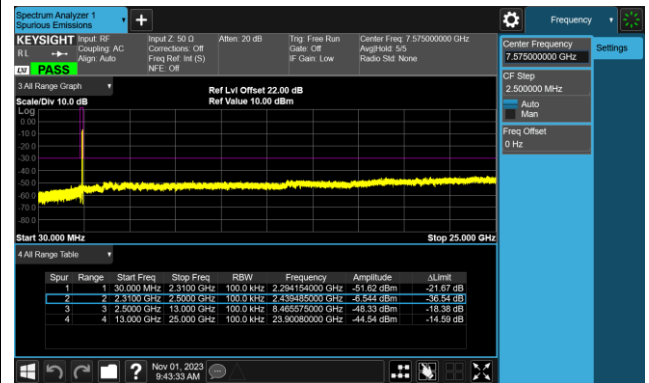
**802.11 n40 CH03 (2422MHz)**

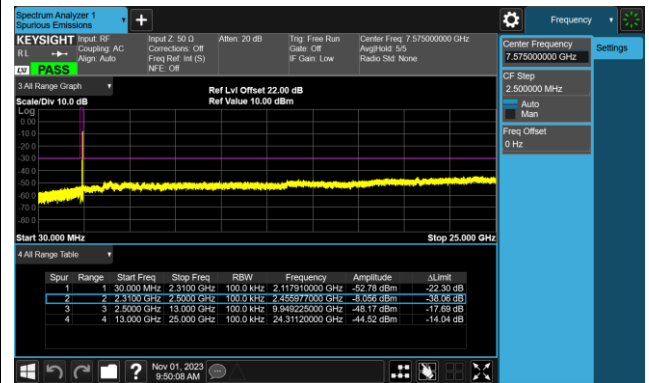**802.11 n40 CH03 (2422MHz)**

**802.11 n40 CH06 (2437MHz)**

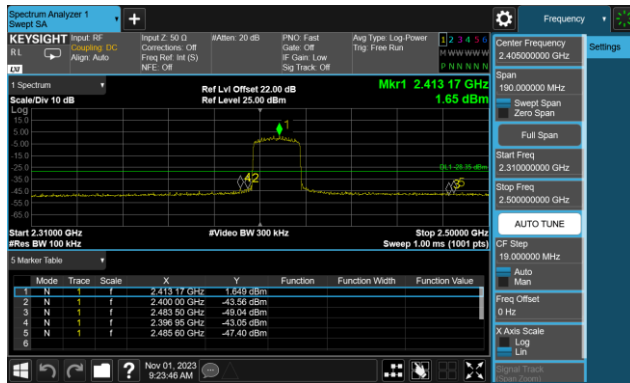**802.11 n40 CH06 (2437MHz)**

**802.11 n40 CH09 (2452MHz)**

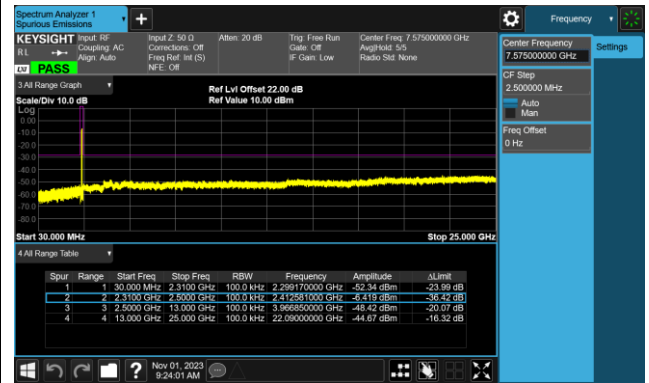**802.11 n40 CH09 (2452MHz)**


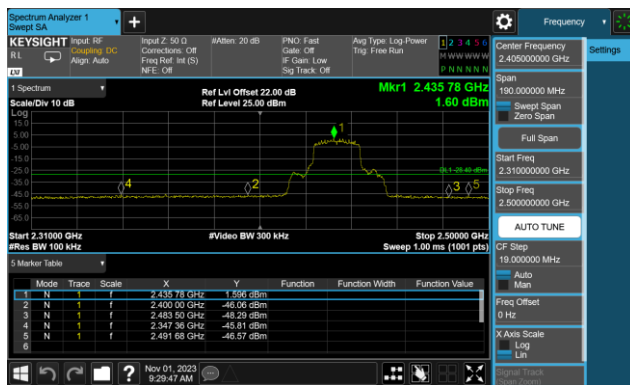
### 802.11 ax20 CH01 (2412MHz)




### 802.11 ax20 CH01 (2412MHz)




### 802.11 ax20 CH06 (2437MHz)




### 802.11 ax20 CH06 (2437MHz)

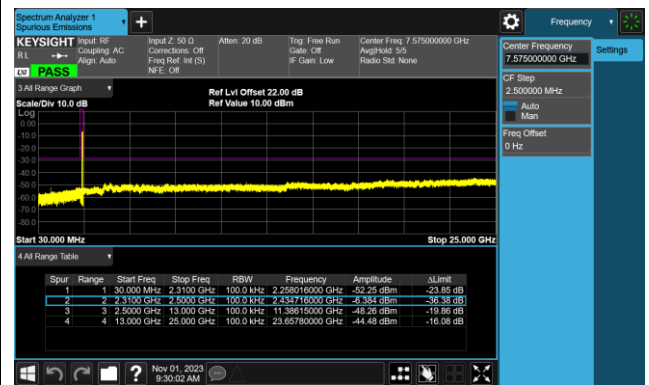

### 802.11 ax20 CH11 (2462MHz)

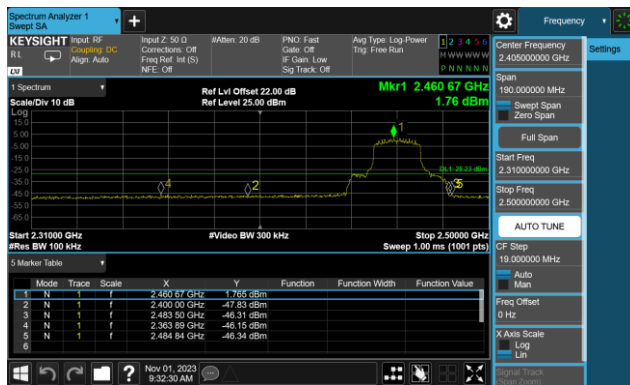


### 802.11 ax20 CH11 (2462MHz)

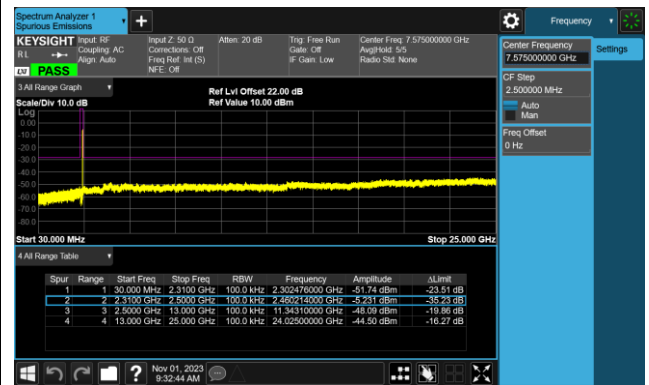


### 802.11 ax40 CH03 (2422MHz)




### 802.11 ax40 CH03 (2422MHz)

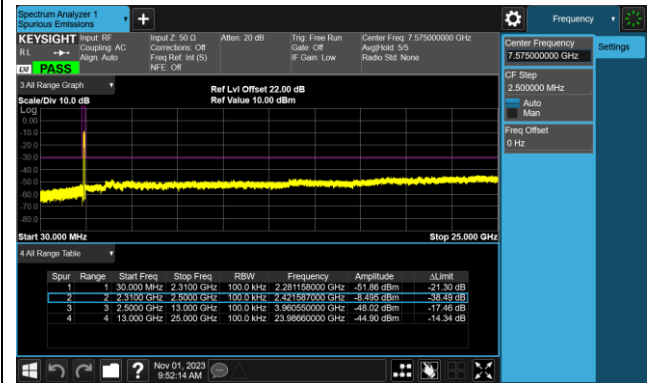


### 802.11 ax40 CH06 (2437MHz)

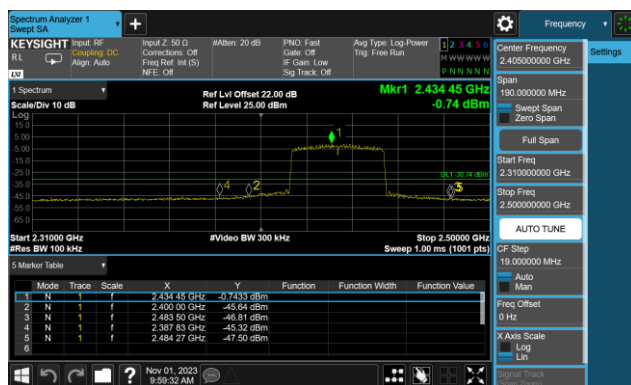


### 802.11 ax40 CH06 (2437MHz)

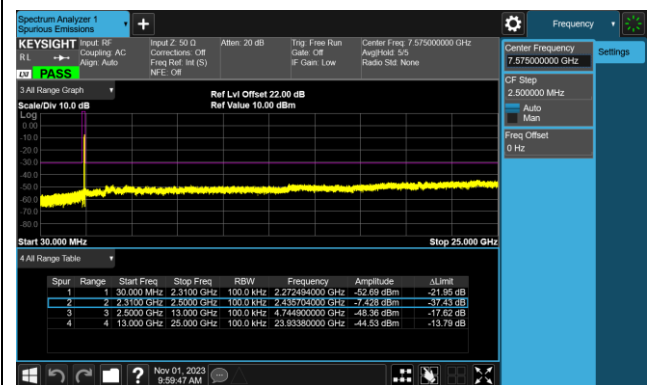

### 802.11 ax40 CH09 (2452MHz)

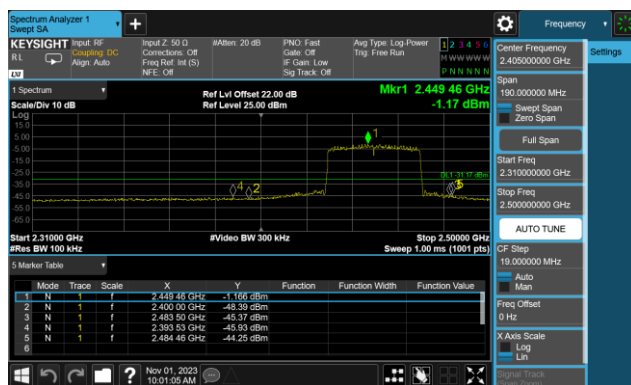


### 802.11 ax40 CH09 (2452MHz)

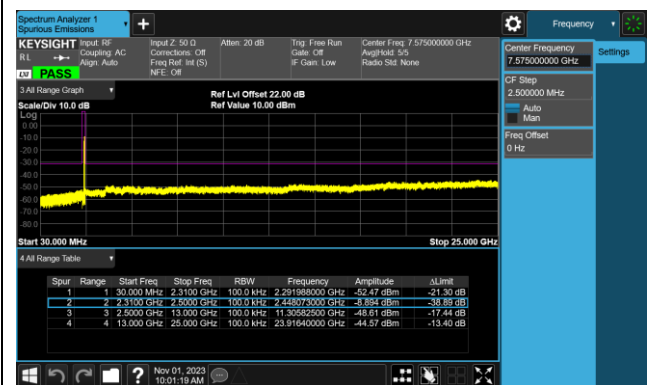


## Ant 2


## 802.11 b CH01 (2412MHz)

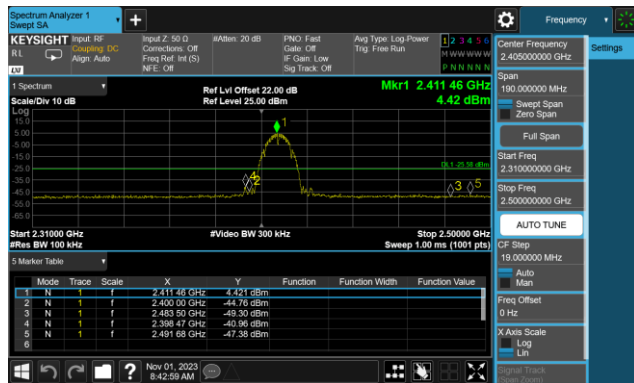


## 802.11 b CH01 (2412MHz)

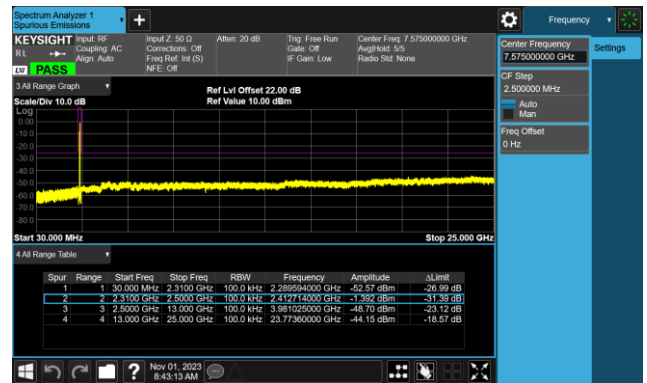


## 802.11 b CH06 (2437MHz)

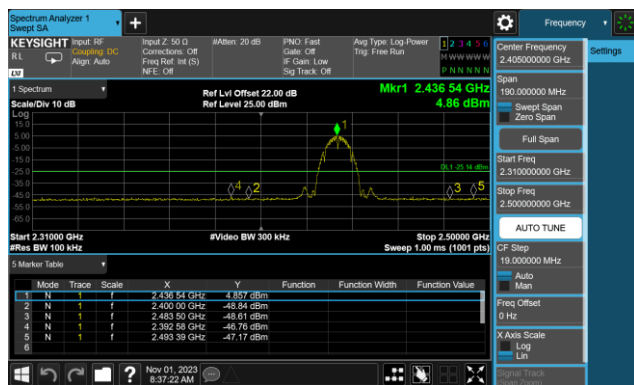


## 802.11 b CH06 (2437MHz)

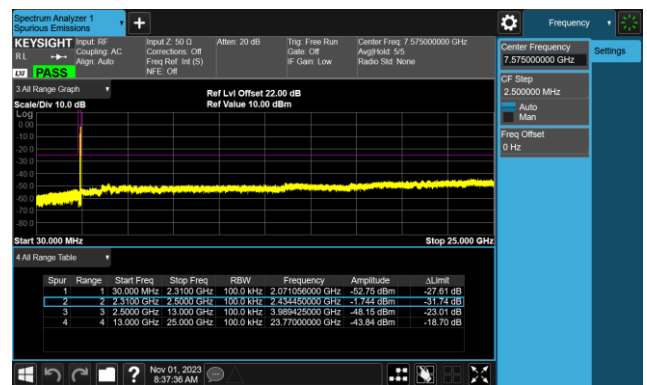


## 802.11 b CH11 (2462MHz)

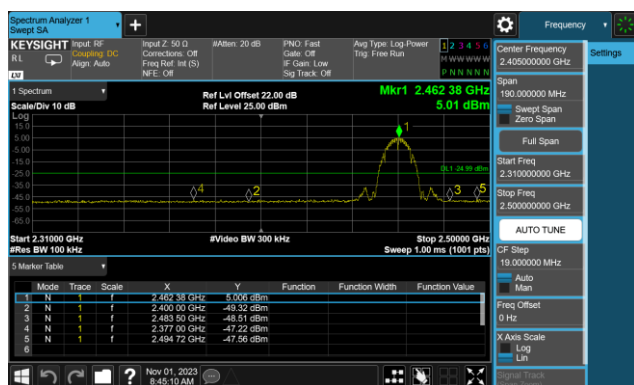


## 802.11 b CH11 (2462MHz)

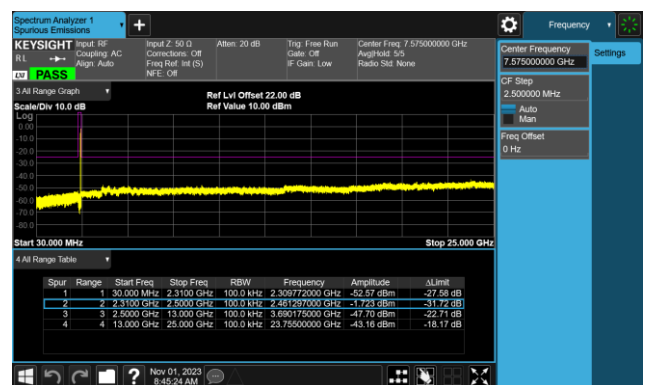


### 802.11 g CH01 (2412MHz)

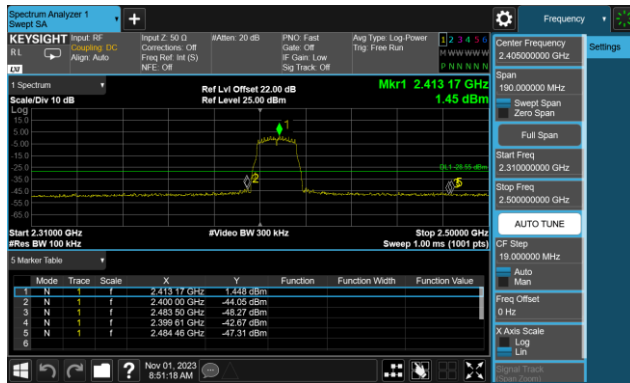


### 802.11 g CH01 (2412MHz)

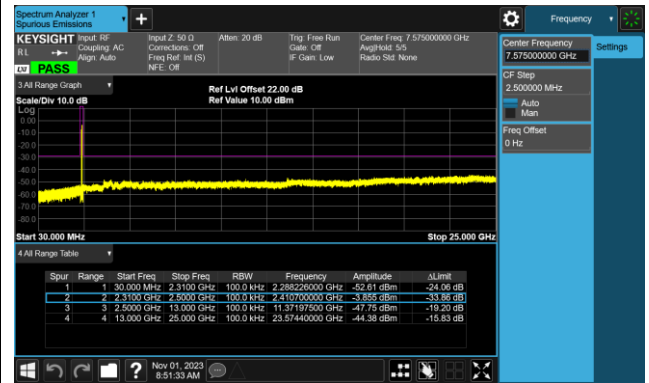


### 802.11 g CH06 (2437MHz)

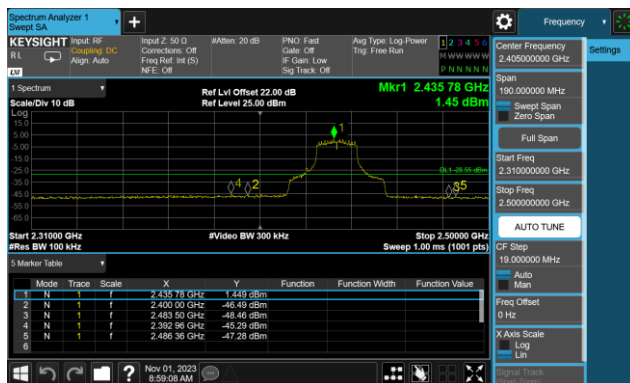


### 802.11 g CH06 (2437MHz)

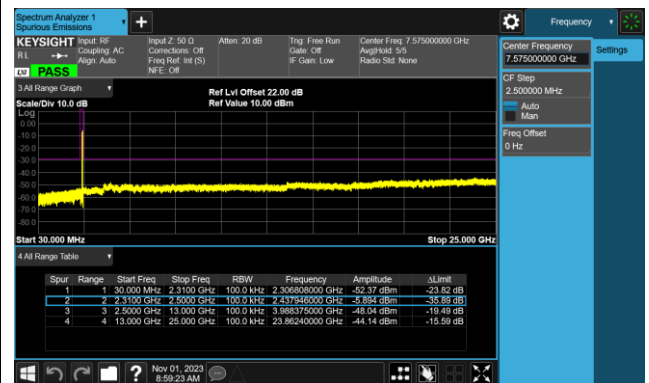


### 802.11 g CH11 (2462MHz)

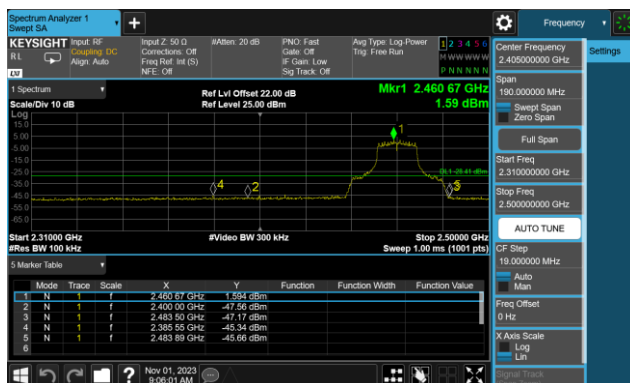

### 802.11 g CH11 (2462MHz)

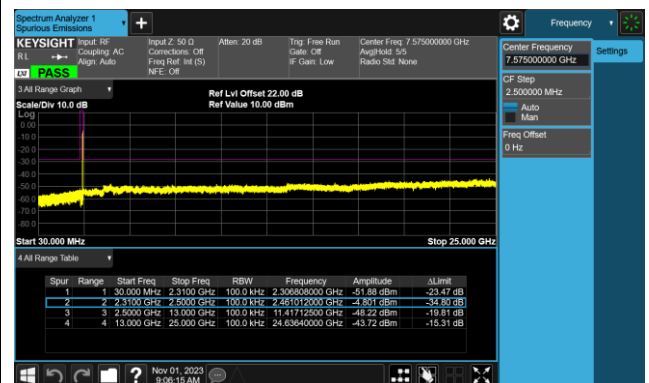

### 802.11 n20 CH01 (2412MHz)

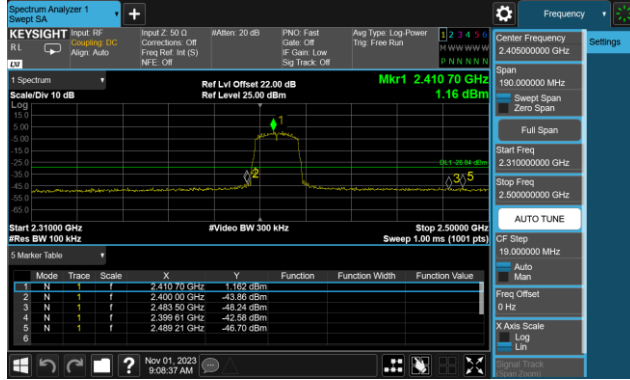


### 802.11 n20 CH01 (2412MHz)




### 802.11 n20 CH06 (2437MHz)




### 802.11 n20 CH06 (2437MHz)

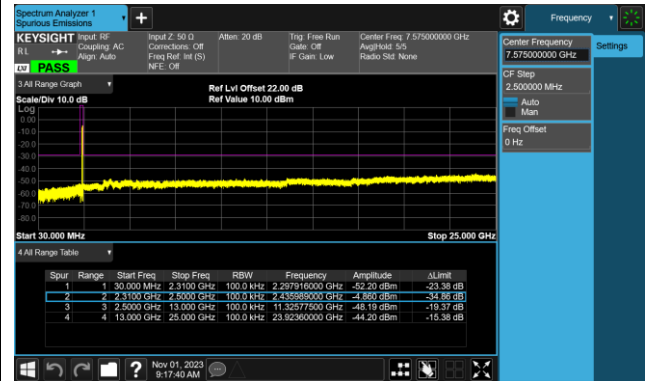






### 802.11 n20 CH11 (2462MHz)

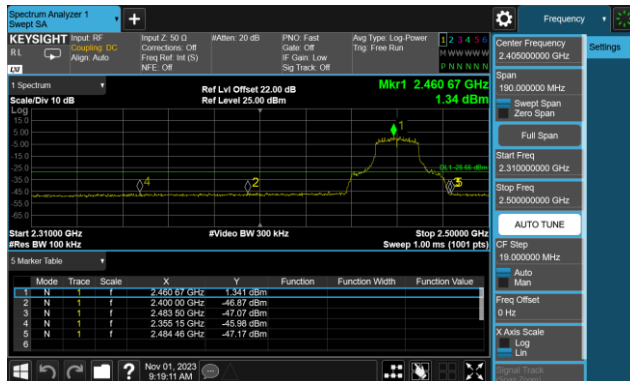

### 802.11 n20 CH11 (2462MHz)

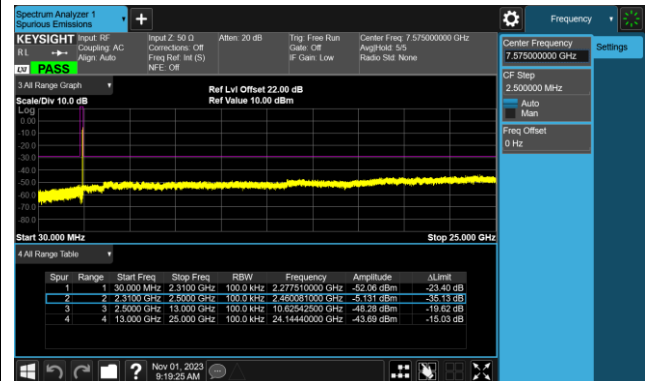


**802.11 n40 CH03 (2422MHz)**

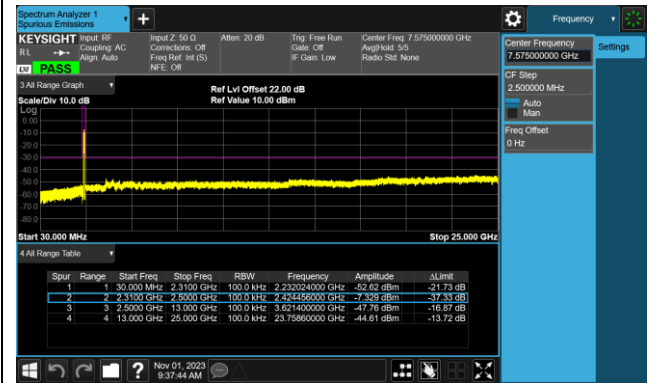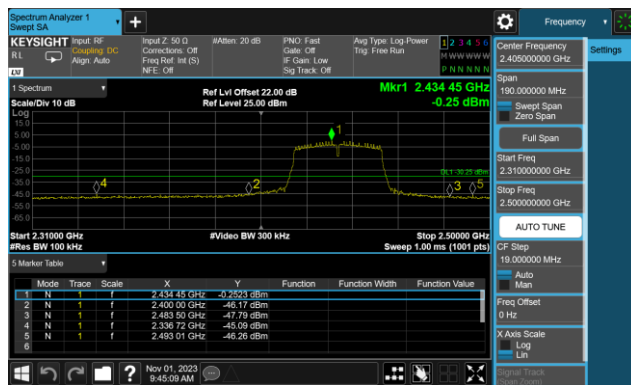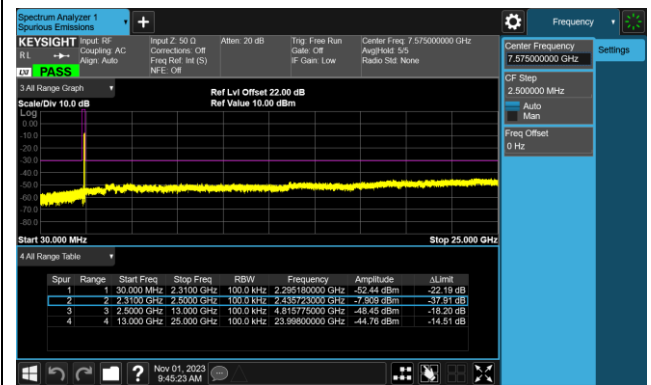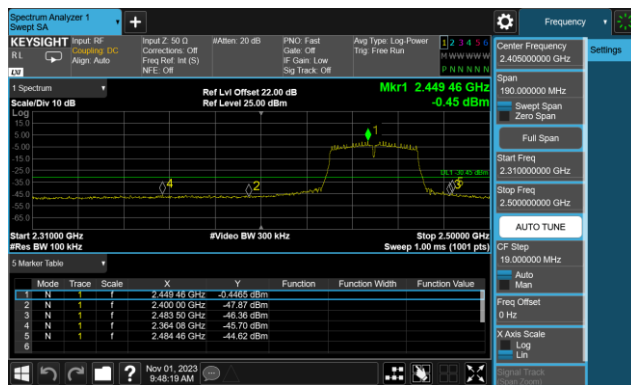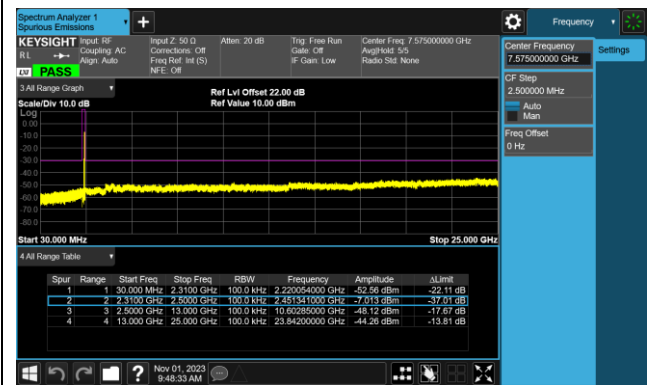
**802.11 n40 CH03 (2422MHz)**

**802.11 n40 CH06 (2437MHz)**

**802.11 n40 CH06 (2437MHz)**

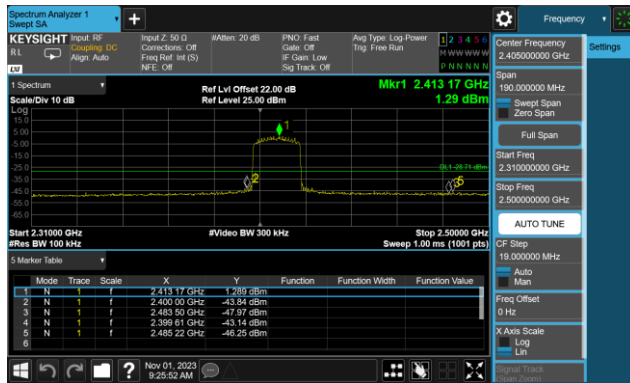**802.11 n40 CH09 (2452MHz)**

**802.11 n40 CH09 (2452MHz)**

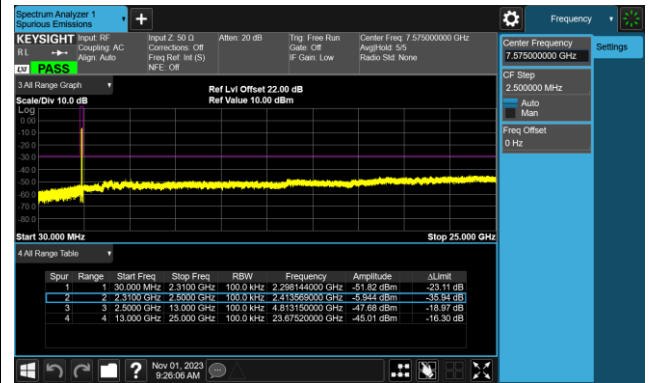


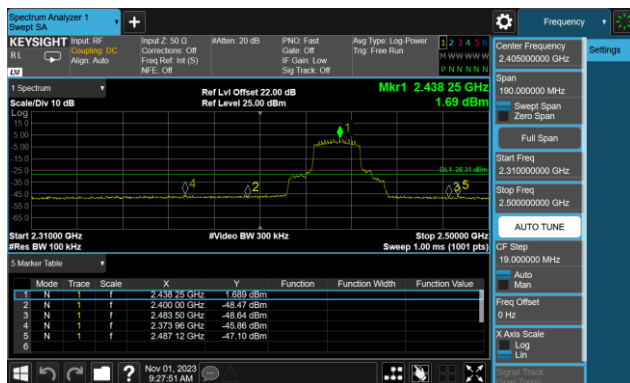
### 802.11 ax20 CH01 (2412MHz)




### 802.11 ax20 CH01 (2412MHz)




### 802.11 ax20 CH06 (2437MHz)




### 802.11 ax20 CH06 (2437MHz)

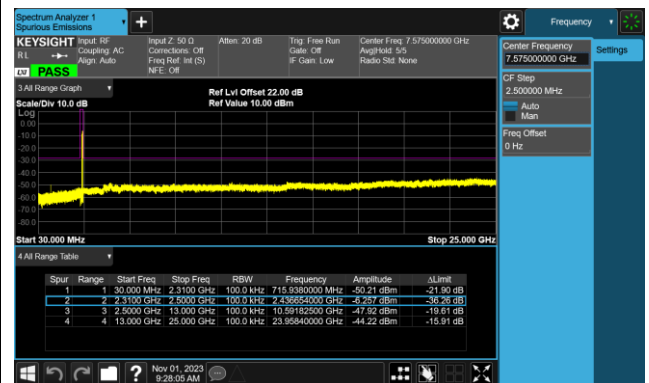


### 802.11 ax20 CH11 (2462MHz)

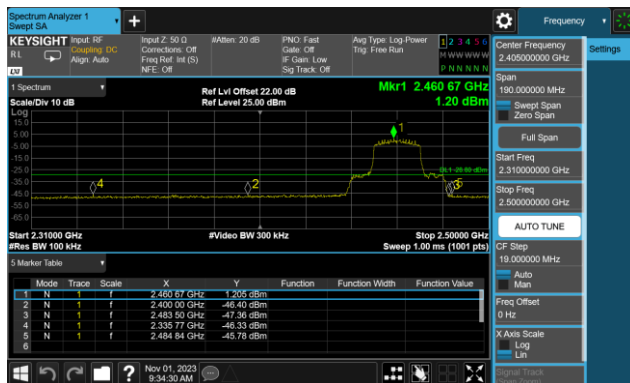


### 802.11 ax20 CH11 (2462MHz)

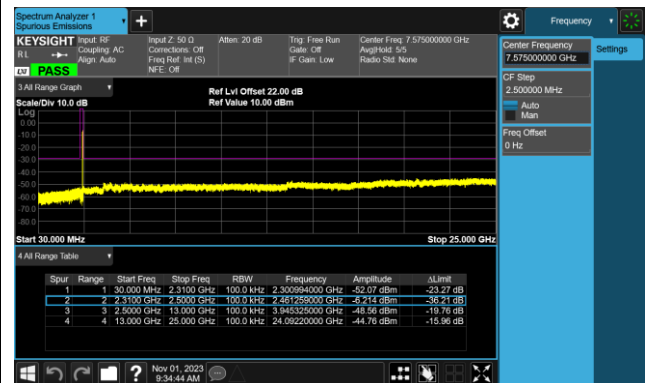


### 802.11 ax40 CH03 (2422MHz)

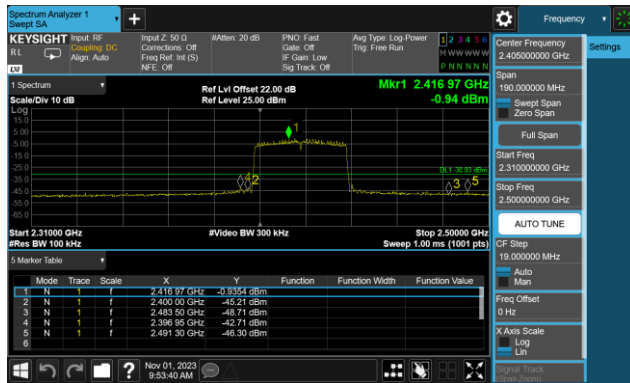


### 802.11 ax40 CH03 (2422MHz)

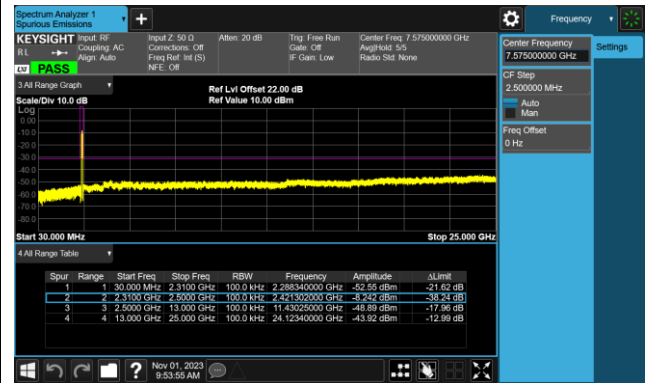


### 802.11 ax40 CH06 (2437MHz)

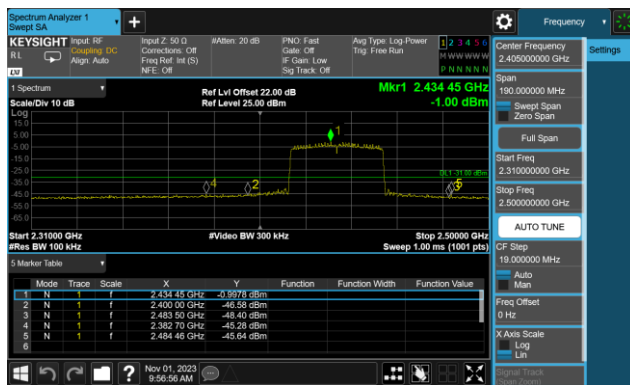


### 802.11 ax40 CH06 (2437MHz)

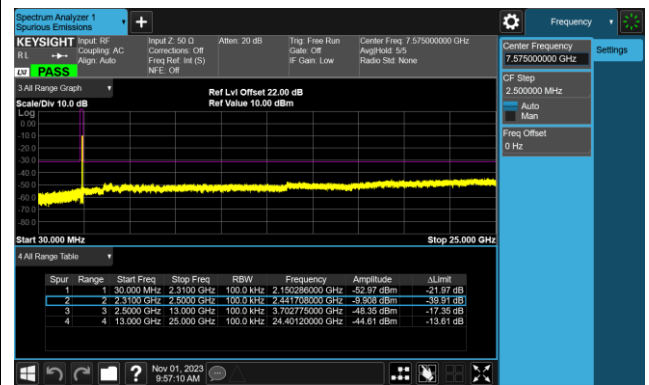

### 802.11 ax40 CH09 (2452MHz)

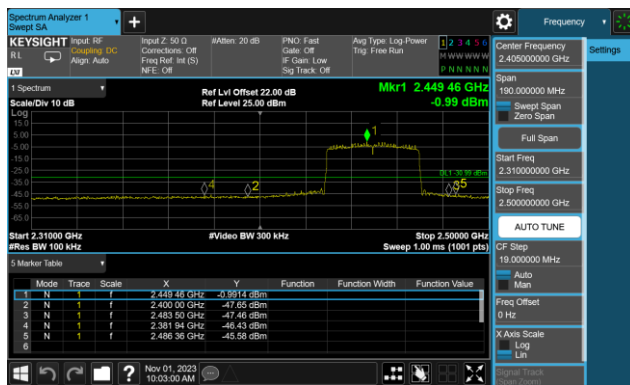

### 802.11 ax40 CH09 (2452MHz)

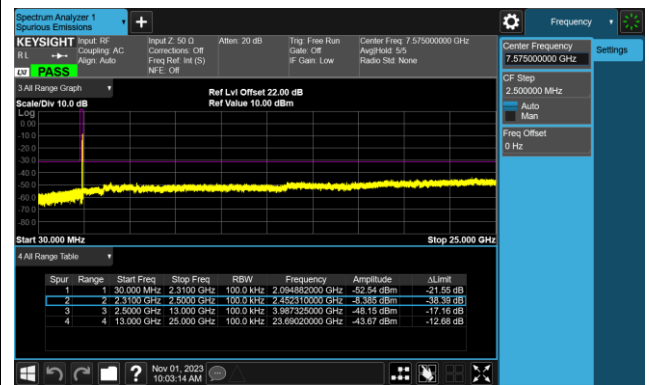

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

### 7.6.3. Test Setting

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 7.6.4. Test Setup

#### Below 1GHz Test Setup:

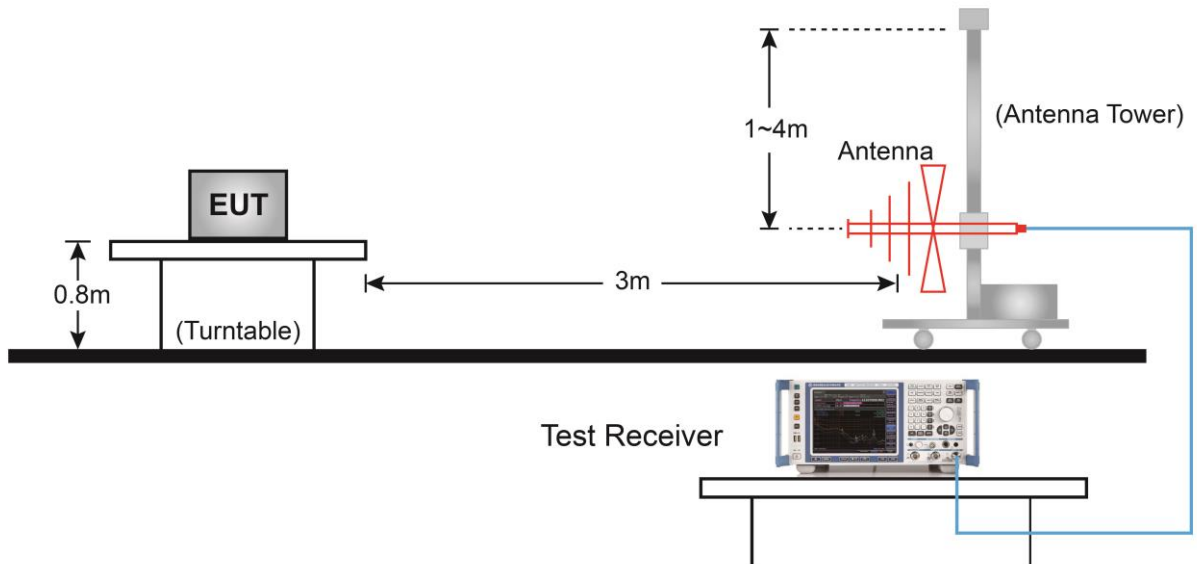


#### Above 1GHz Test Setup:

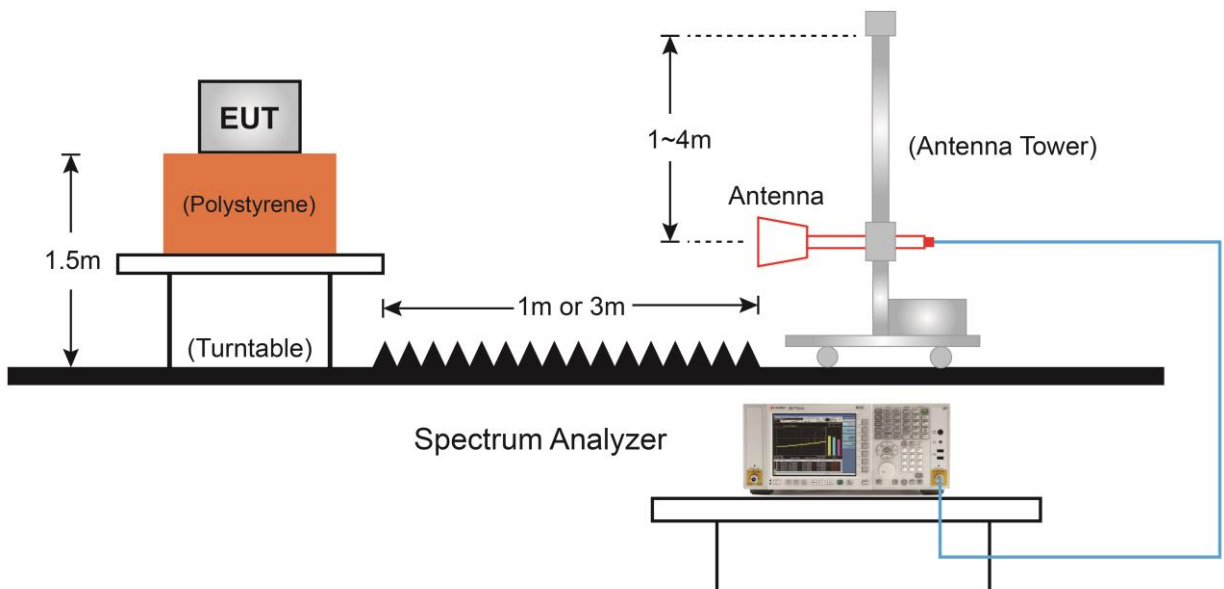

### 7.6.5. Test Result

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-26
Factor	VULB 9162	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook

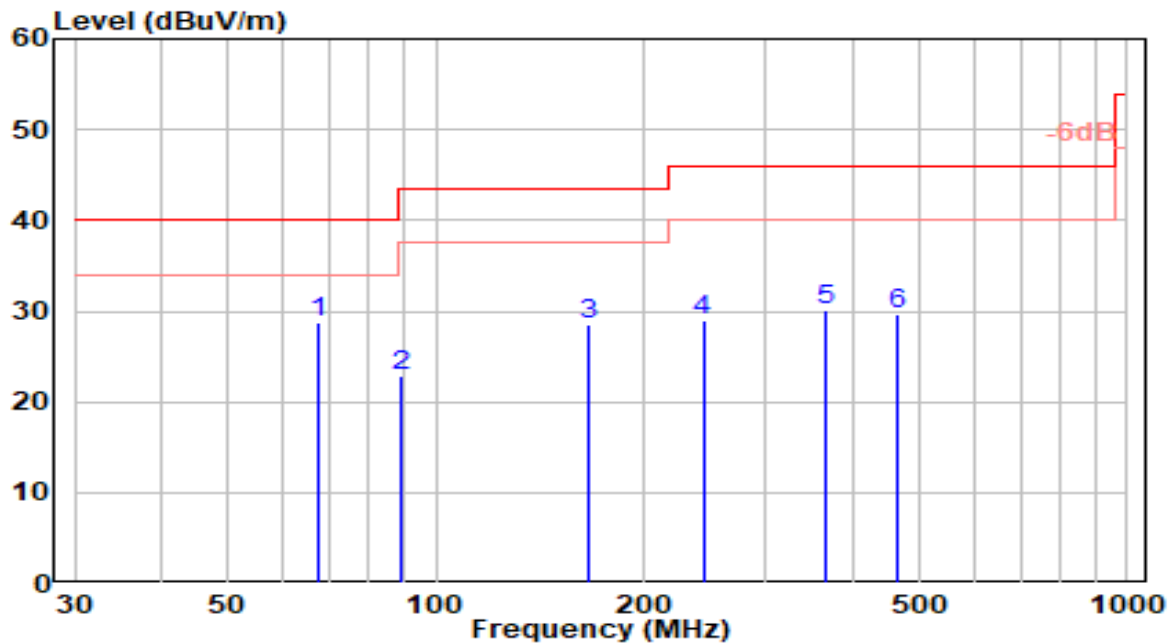


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 67.830	12.06	16.76	28.82	-11.18	40.00	200	0	QP
2	89.170	6.02	16.81	22.84	-20.66	43.50	200	284	QP
3	165.800	12.67	15.93	28.60	-14.90	43.50	150	281	QP
4	243.400	8.98	19.95	28.93	-17.07	46.00	100	0	QP
5	366.590	7.11	23.01	30.12	-15.88	46.00	100	133	QP
6	464.560	5.27	24.31	29.58	-16.42	46.00	100	18	QP

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-26
Factor	VULB 9162	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook

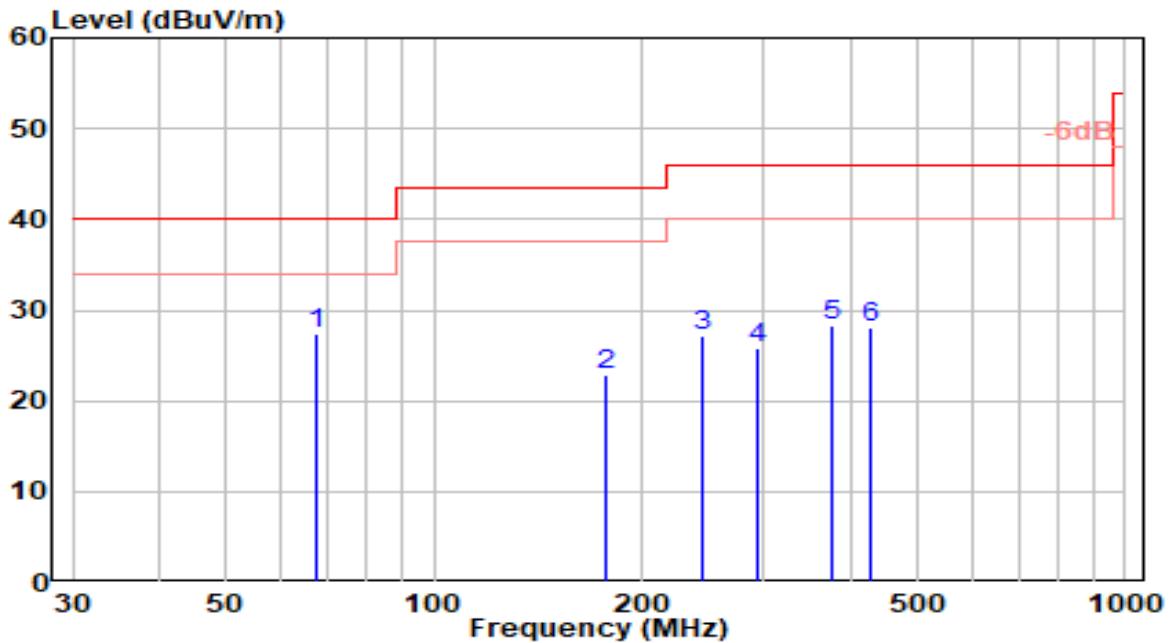


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	67.830	10.74	16.76	27.50	-12.50	40.00	200	37	QP
2		177.440	6.45	16.42	22.88	-20.62	43.50	150	63	QP
3		244.370	7.24	19.99	27.23	-18.77	46.00	150	302	QP
4		292.870	5.01	20.77	25.78	-20.22	46.00	200	138	QP
5		377.260	5.17	23.18	28.35	-17.65	46.00	100	361	QP
6		426.730	4.25	23.75	27.99	-18.01	46.00	200	343	QP

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

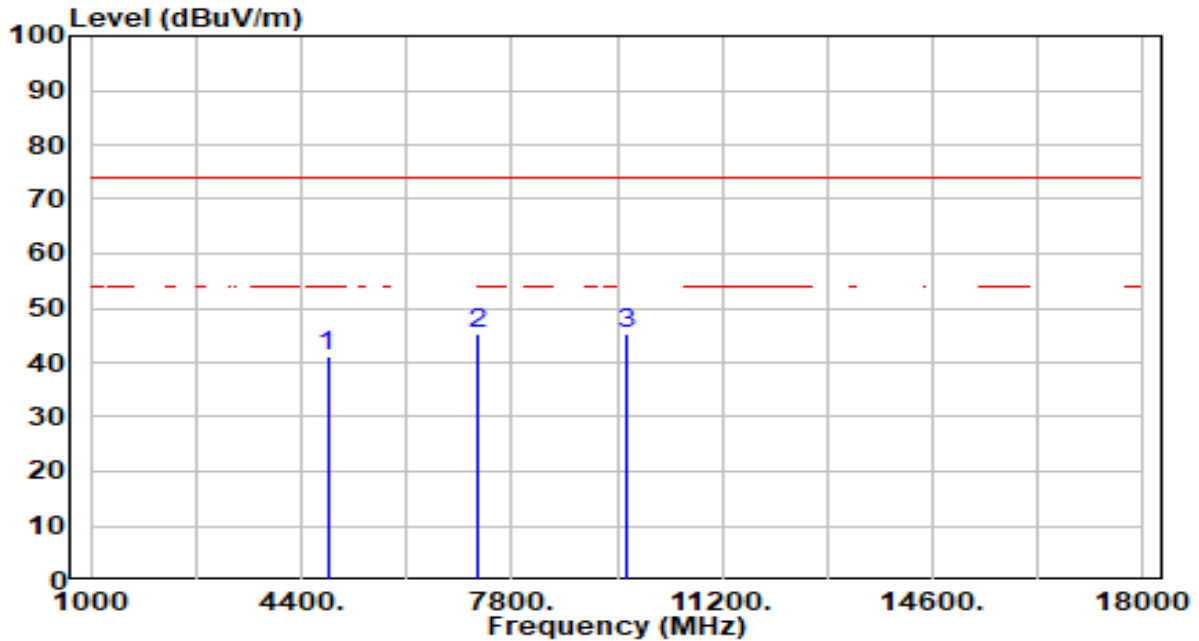


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.38	-1.10	41.28	-32.72	74.00	225	0	Peak
2	* 7236.000	41.53	3.90	45.43	-28.57	74.00	222	0	Peak
3	9648.000	42.19	3.21	45.41	-28.59	74.00	200	106	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

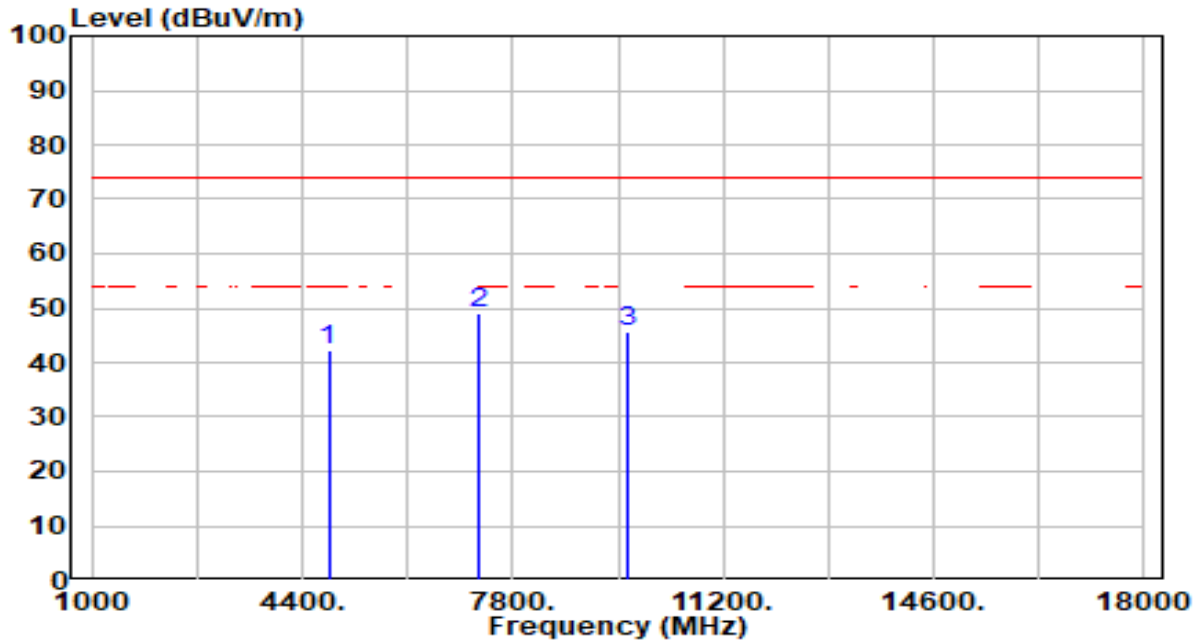


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	43.55	-1.10	42.45	-31.55	74.00	100	277	Peak
2	* 7236.000	45.12	3.90	49.03	-24.97	74.00	100	21	Peak
3	9648.000	42.30	3.21	45.51	-28.49	74.00	100	305	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

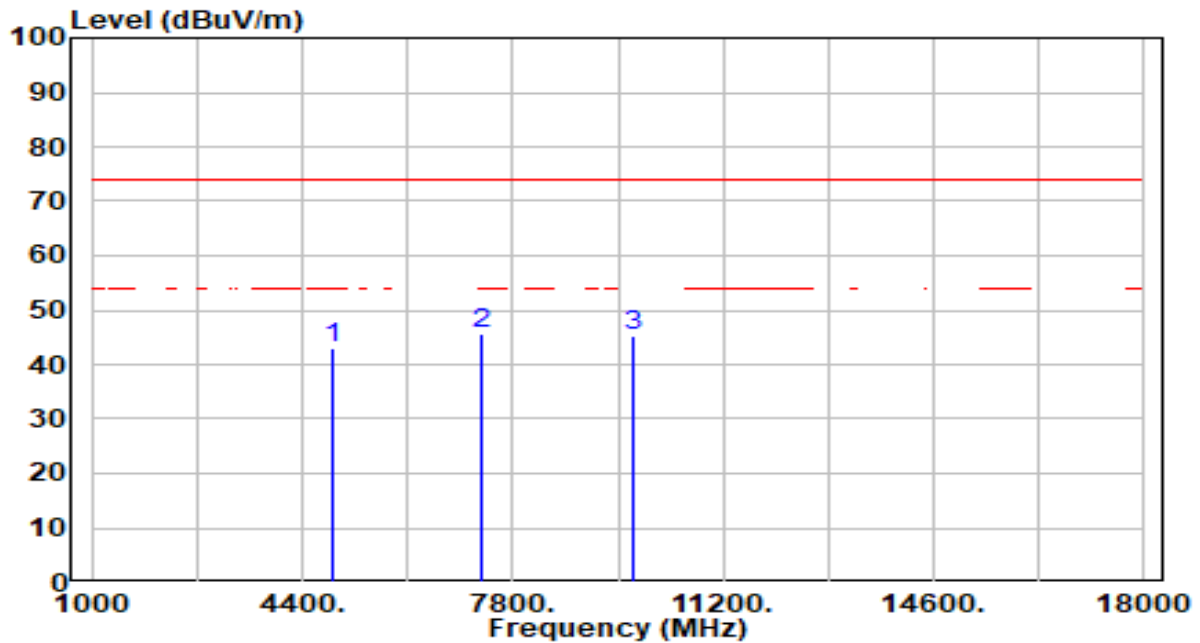


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.99	-0.97	43.03	-30.97	74.00	100	167	Peak
2	* 7311.000	41.70	3.92	45.62	-28.38	74.00	100	318	Peak
3	9748.000	42.02	3.24	45.26	-28.74	74.00	100	30	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

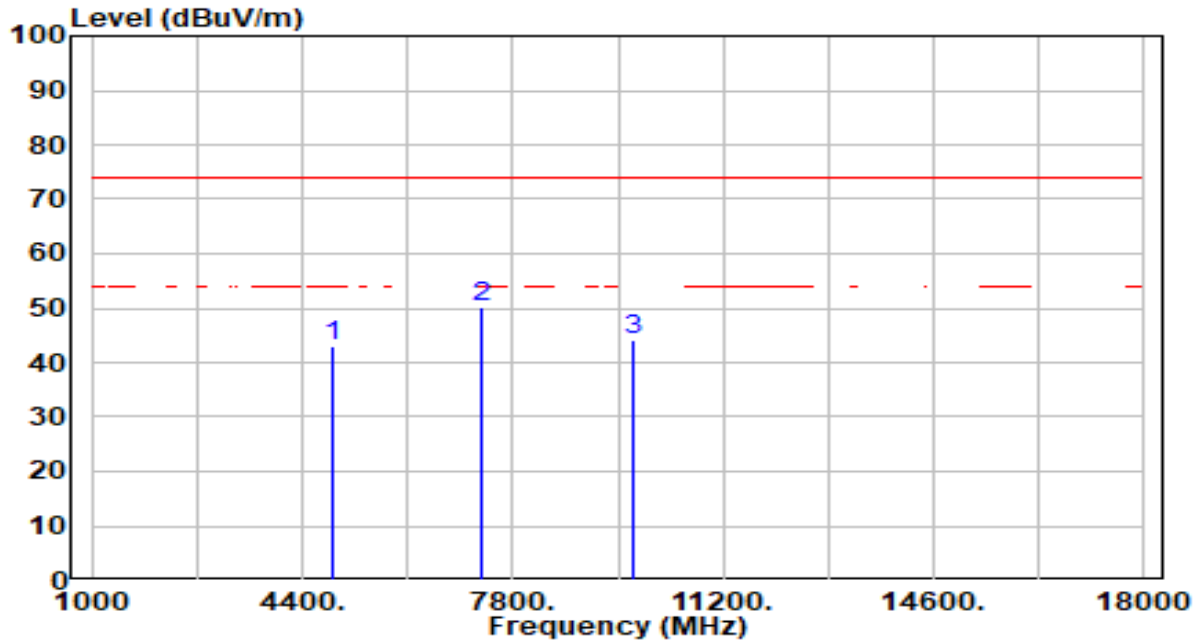


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.96	-0.97	43.00	-31.00	74.00	100	290	Peak
2	* 7311.000	46.38	3.92	50.30	-23.70	74.00	100	87	Peak
3	9748.000	40.91	3.24	44.15	-29.85	74.00	100	123	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

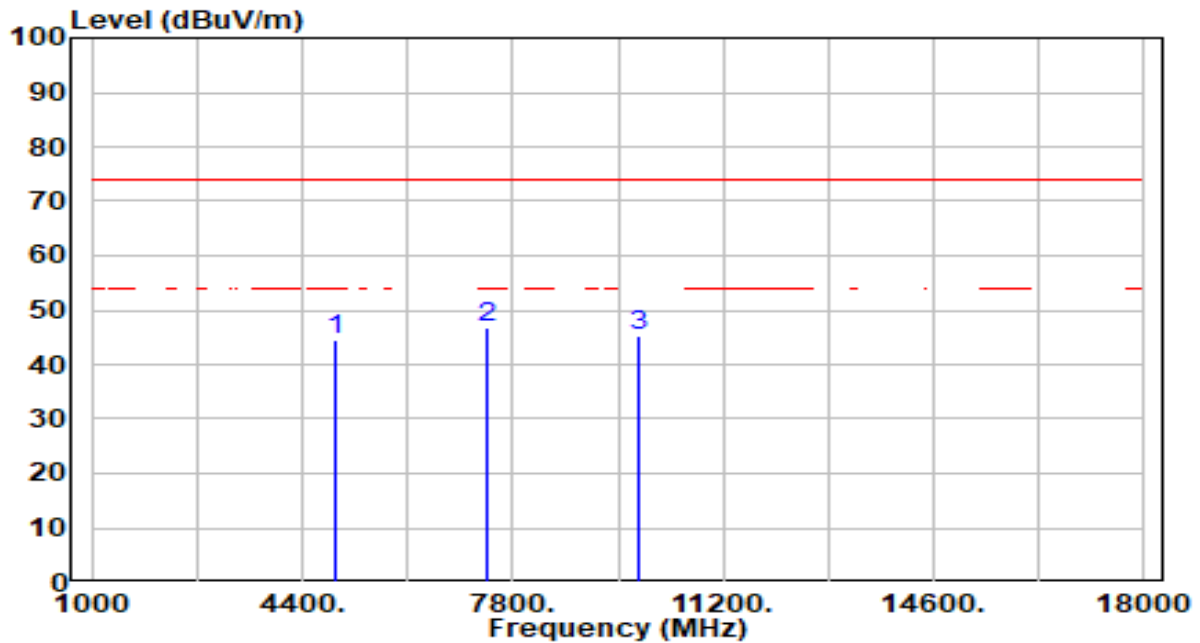


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.28	-0.84	44.45	-29.55	74.00	100	198	Peak
2	* 7386.000	42.85	3.93	46.79	-27.21	74.00	100	182	Peak
3	9848.000	42.01	3.27	45.28	-28.72	74.00	100	0	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

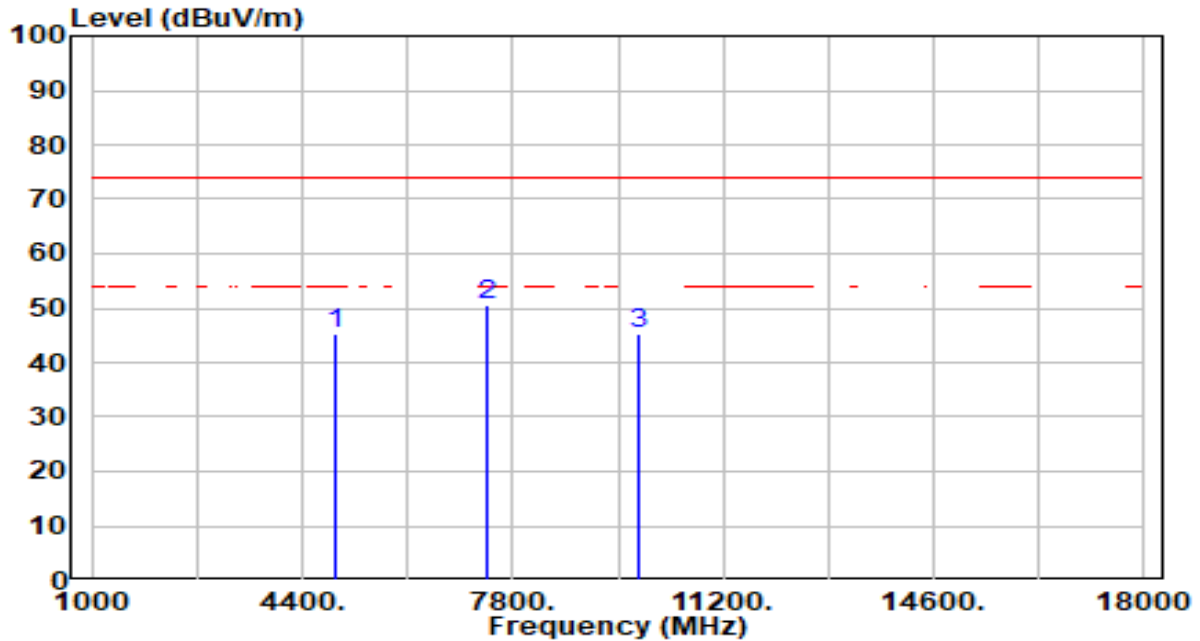


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	46.26	-0.84	45.42	-28.58	74.00	100	279	Peak
2	* 7386.000	46.65	3.93	50.58	-23.42	74.00	100	81	Peak
3	9848.000	41.90	3.27	45.17	-28.83	74.00	100	17	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

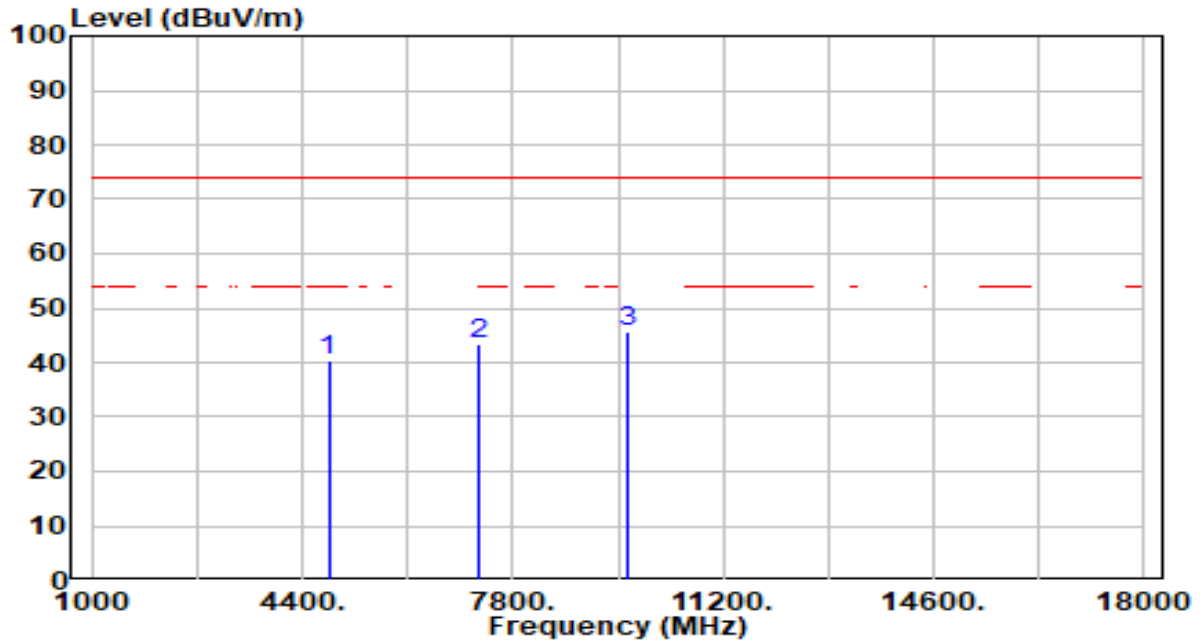


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.55	-1.10	40.46	-33.54	74.00	100	0	Peak
2	7236.000	39.63	3.90	43.53	-30.47	74.00	100	248	Peak
3	* 9648.000	42.26	3.21	45.48	-28.52	74.00	100	79	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

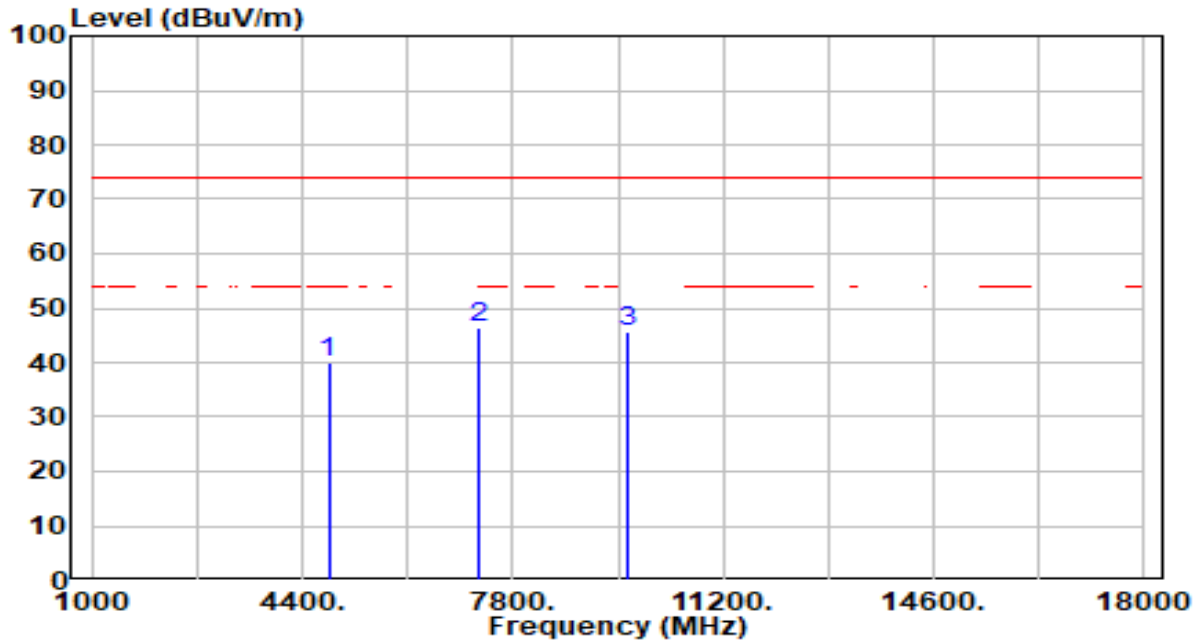


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.00	-1.10	39.90	-34.10	74.00	100	209	Peak
2	* 7236.000	42.45	3.90	46.35	-27.65	74.00	100	28	Peak
3	9648.000	42.43	3.21	45.64	-28.36	74.00	100	88	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

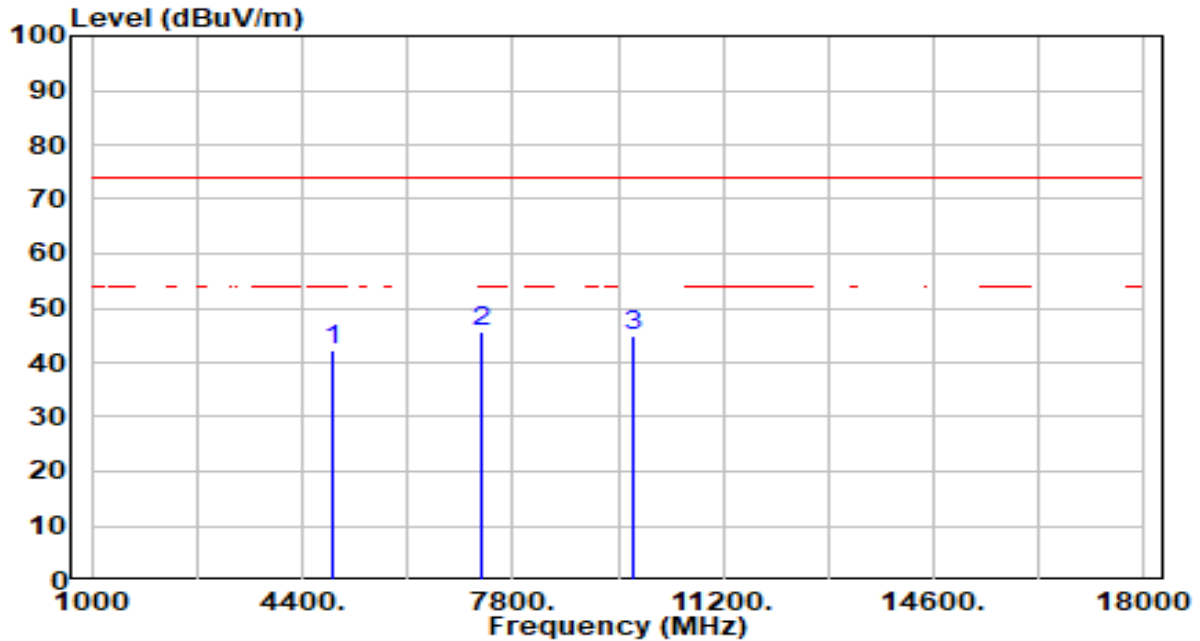


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.22	-0.97	42.26	-31.74	74.00	100	0	Peak
2	* 7311.000	41.90	3.92	45.82	-28.18	74.00	100	183	Peak
3	9748.000	41.57	3.24	44.81	-29.19	74.00	100	119	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

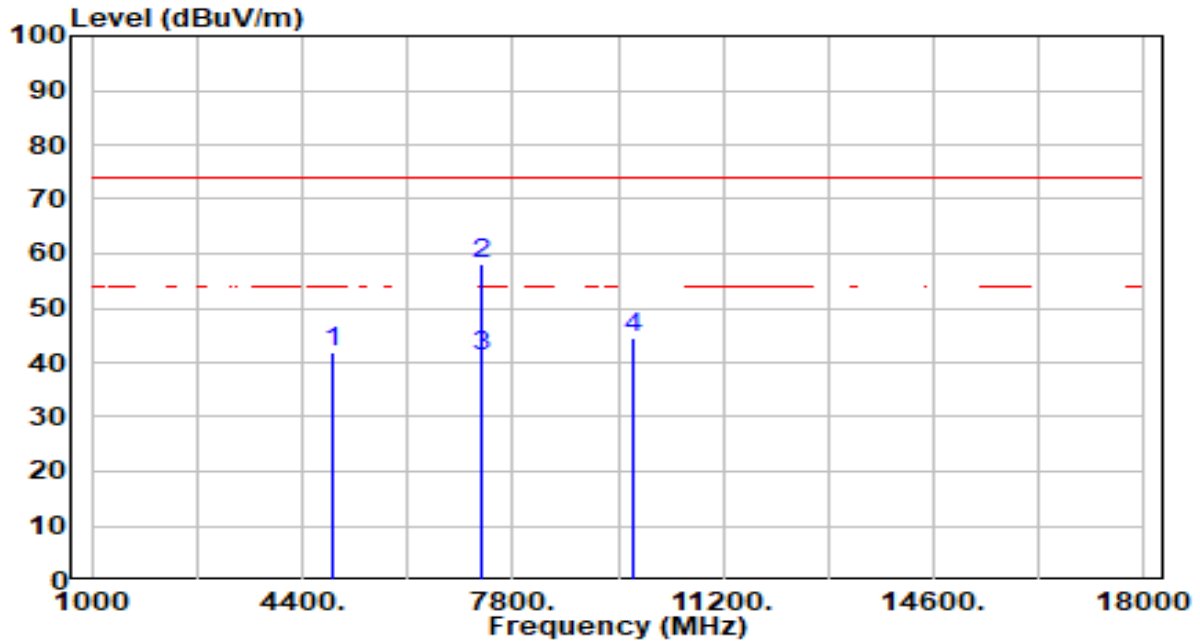


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.02	-0.97	42.05	-31.95	74.00	100	277	Peak
2	* 7311.000	54.05	3.92	57.97	-16.03	74.00	100	95	Peak
3	* 7311.000	37.16	3.92	41.08	-12.92	54.00	100	95	Average
4	9748.000	41.46	3.24	44.70	-29.30	74.00	100	360	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

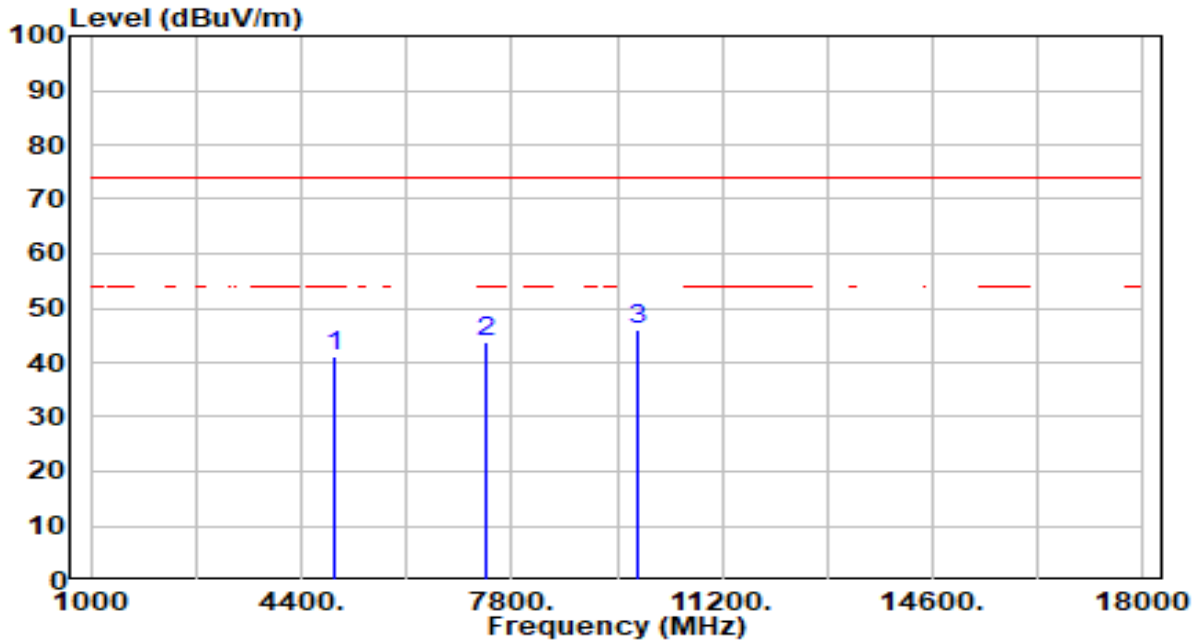


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.89	-0.84	41.05	-32.95	74.00	100	18	Peak
2	7386.000	39.82	3.93	43.75	-30.25	74.00	100	336	Peak
3	* 9848.000	42.69	3.27	45.96	-28.04	74.00	100	276	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

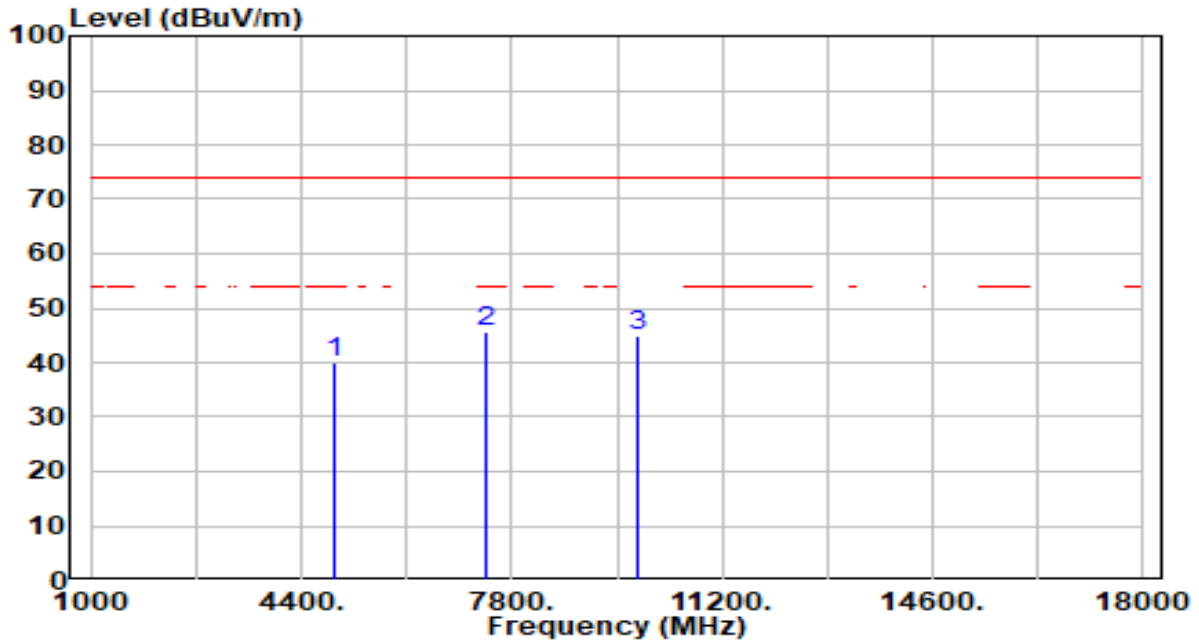


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.75	-0.84	39.91	-34.09	74.00	100	133	Peak
2	* 7386.000	41.66	3.93	45.60	-28.40	74.00	100	69	Peak
3	9848.000	41.65	3.27	44.92	-29.08	74.00	100	278	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

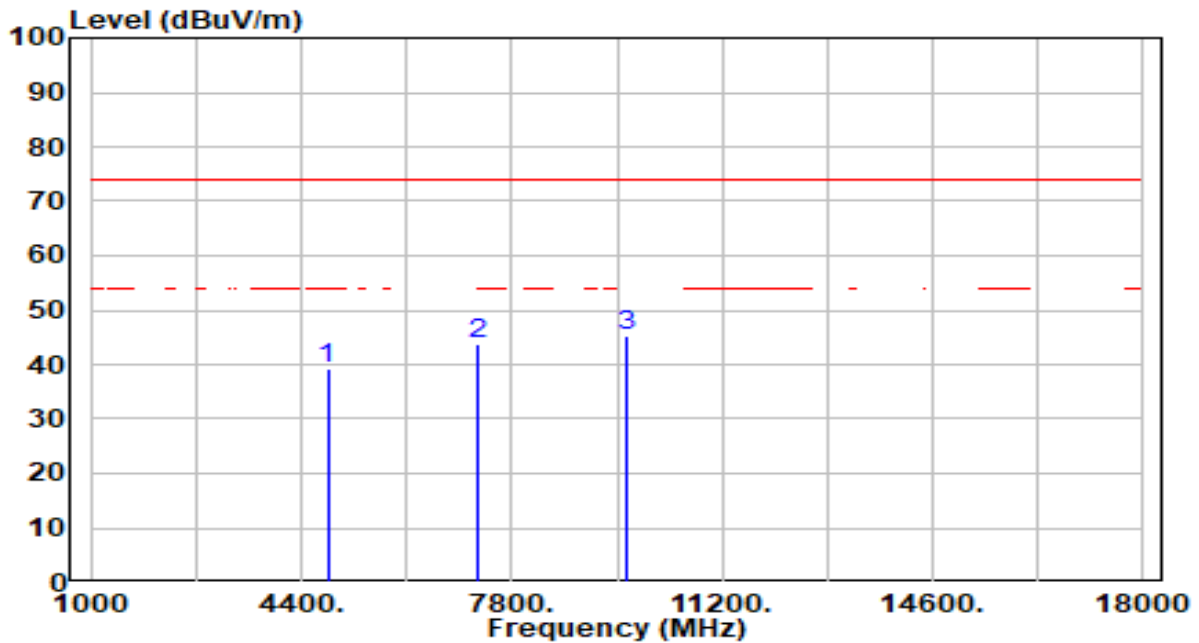


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.40	-1.10	39.30	-34.70	74.00	100	359	Peak
2	7236.000	39.80	3.90	43.70	-30.30	74.00	100	309	Peak
3	* 9648.000	41.90	3.21	45.12	-28.88	74.00	100	59	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

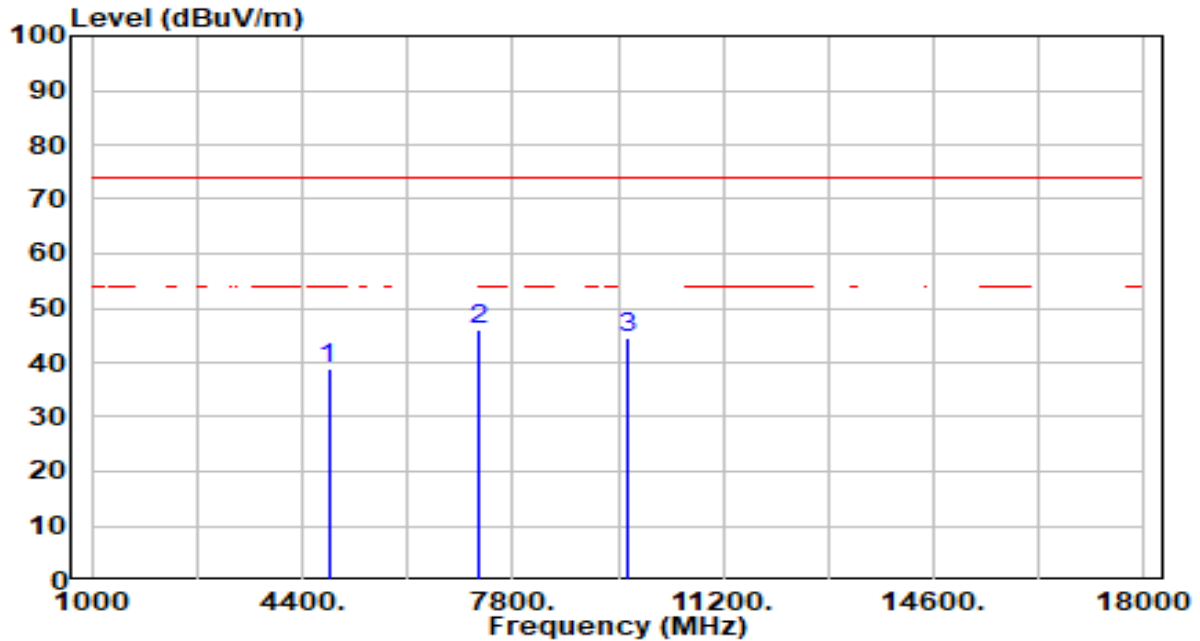


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.96	-1.10	38.86	-35.14	74.00	100	39	Peak
2	* 7236.000	41.98	3.90	45.88	-28.12	74.00	100	110	Peak
3	9648.000	41.43	3.21	44.64	-29.36	74.00	100	360	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

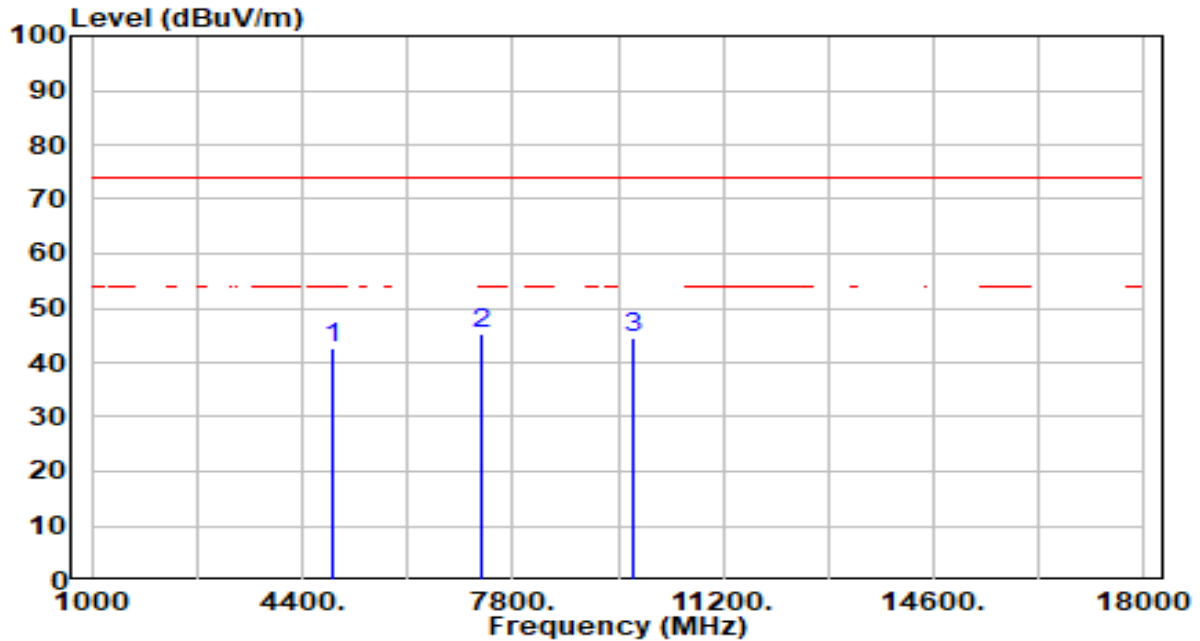


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.55	-0.97	42.59	-31.41	74.00	100	7	Peak
2	* 7311.000	41.50	3.92	45.42	-28.58	74.00	100	201	Peak
3	9748.000	41.33	3.24	44.57	-29.43	74.00	100	209	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

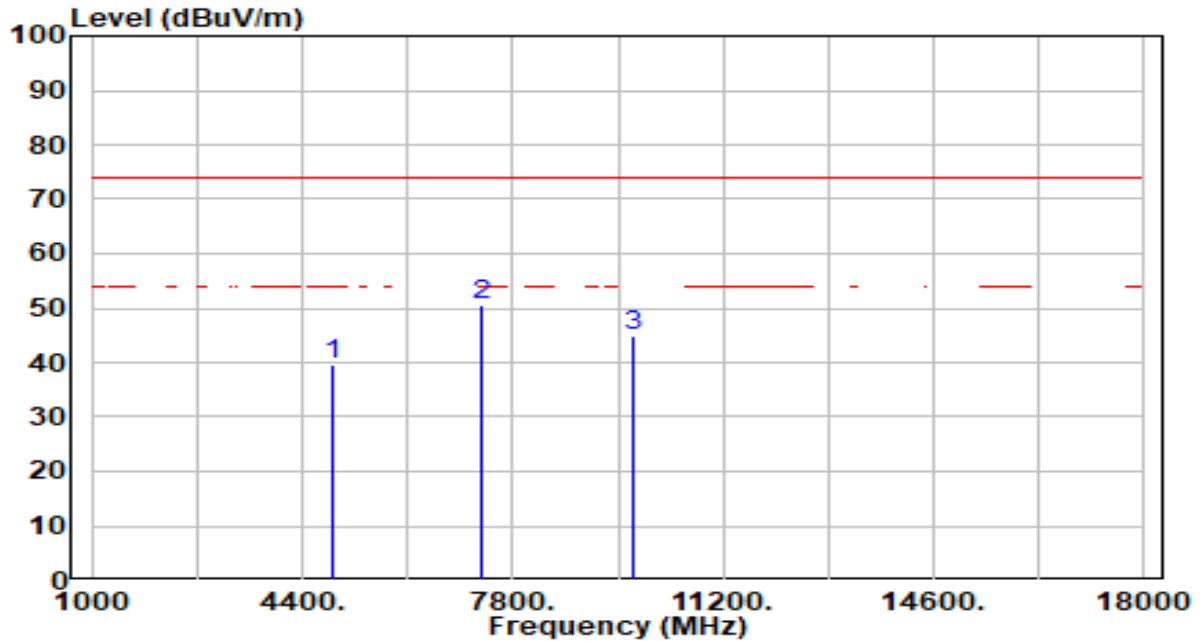


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.70	-0.97	39.73	-34.27	74.00	100	47	Peak
2	* 7311.000	46.58	3.92	50.50	-23.50	74.00	100	43	Peak
3	9748.000	41.62	3.24	44.86	-29.14	74.00	100	322	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

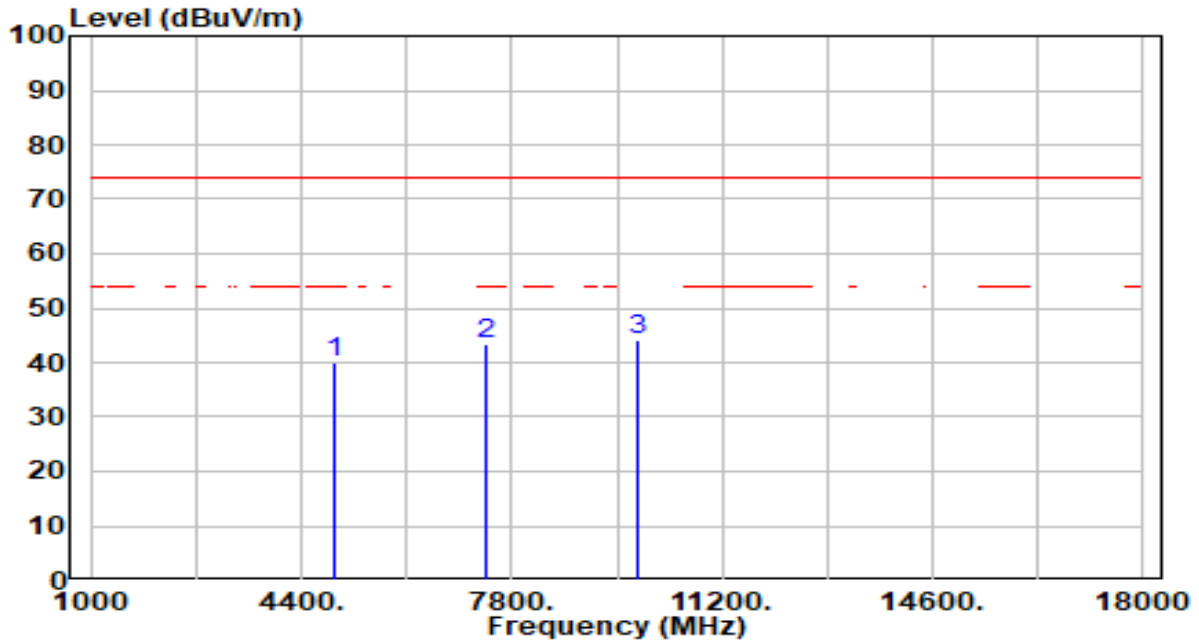


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.66	-0.84	39.82	-34.18	74.00	100	360	Peak
2	7386.000	39.29	3.93	43.22	-30.78	74.00	100	342	Peak
3	* 9848.000	40.92	3.27	44.19	-29.81	74.00	100	58	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

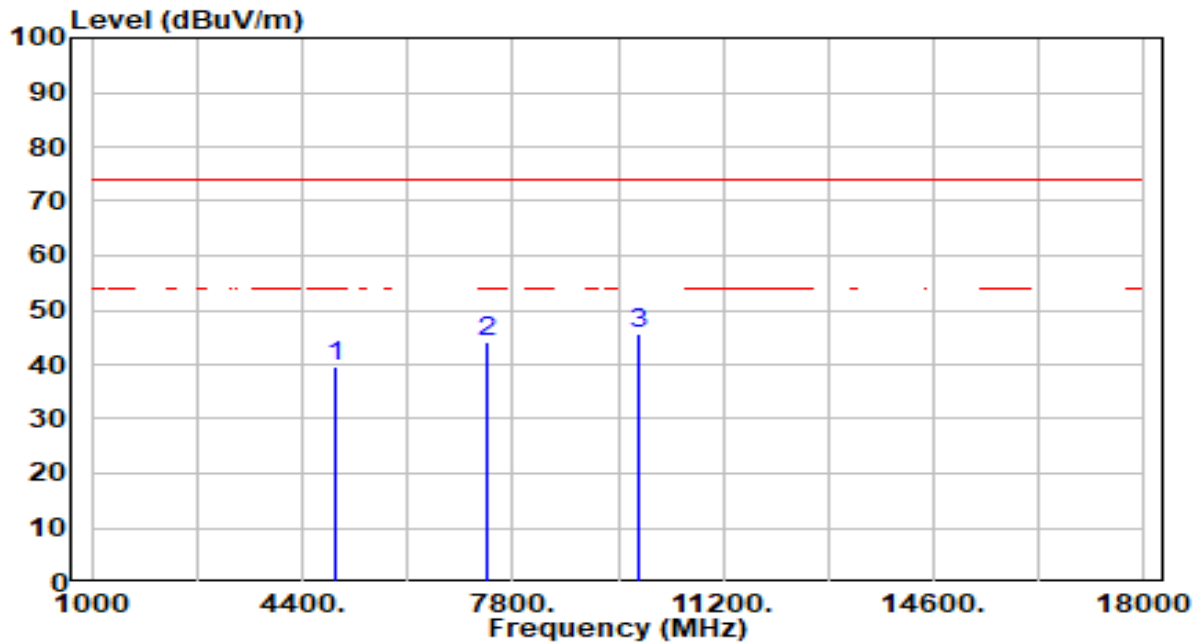


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.32	-0.84	39.48	-34.52	74.00	100	83	Peak
2	7386.000	40.03	3.93	43.97	-30.03	74.00	100	106	Peak
3	* 9848.000	42.42	3.27	45.69	-28.31	74.00	100	94	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2	Test Voltage	By Notebook PC

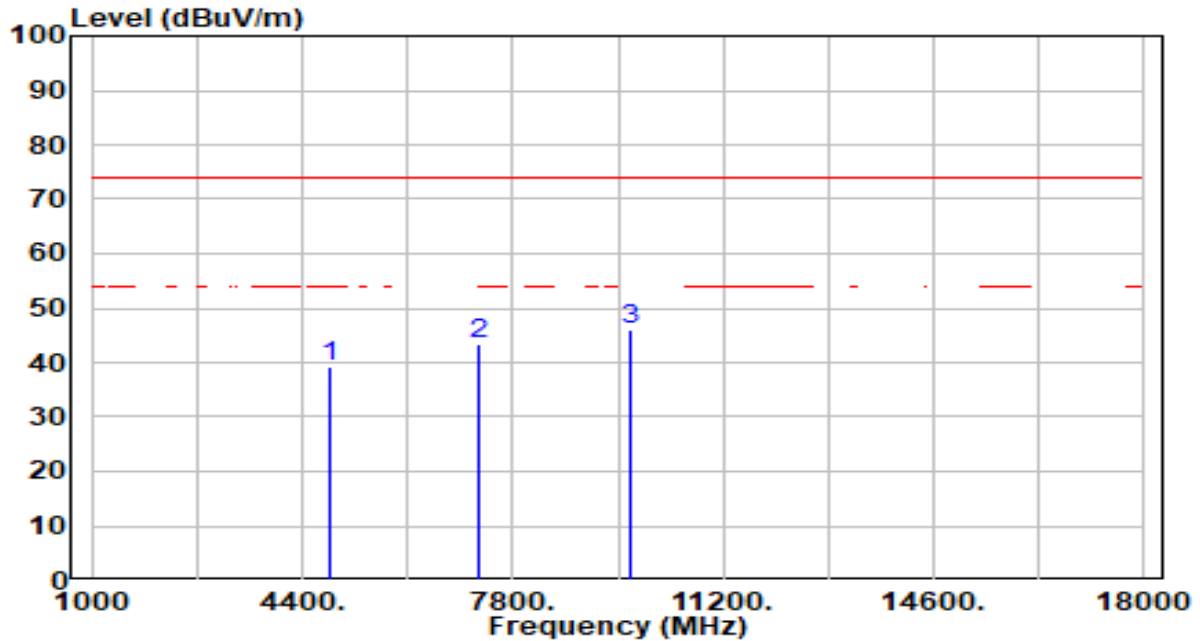


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.34	-1.05	39.30	-34.70	74.00	100	274	Peak
2	7266.000	39.36	3.91	43.27	-30.73	74.00	100	86	Peak
3	* 9688.000	42.83	3.23	46.05	-27.95	74.00	100	242	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2	Test Voltage	By Notebook PC

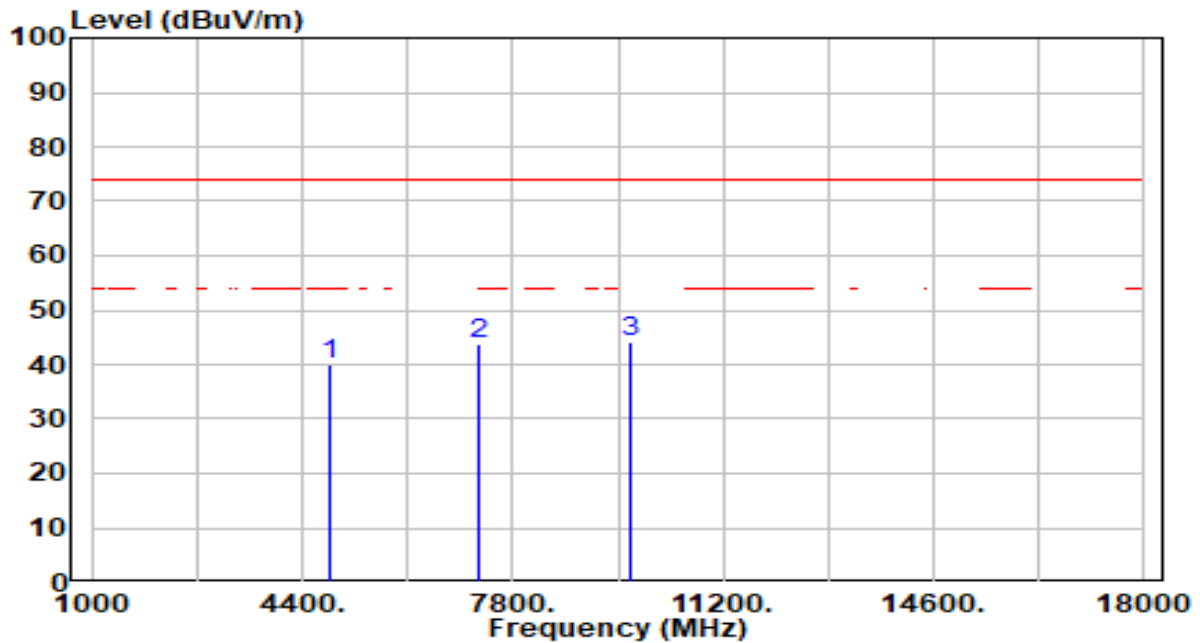


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.97	-1.05	39.92	-34.08	74.00	100	190	Peak
2	7266.000	40.03	3.91	43.94	-30.06	74.00	100	83	Peak
3	* 9688.000	41.11	3.23	44.34	-29.66	74.00	100	123	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

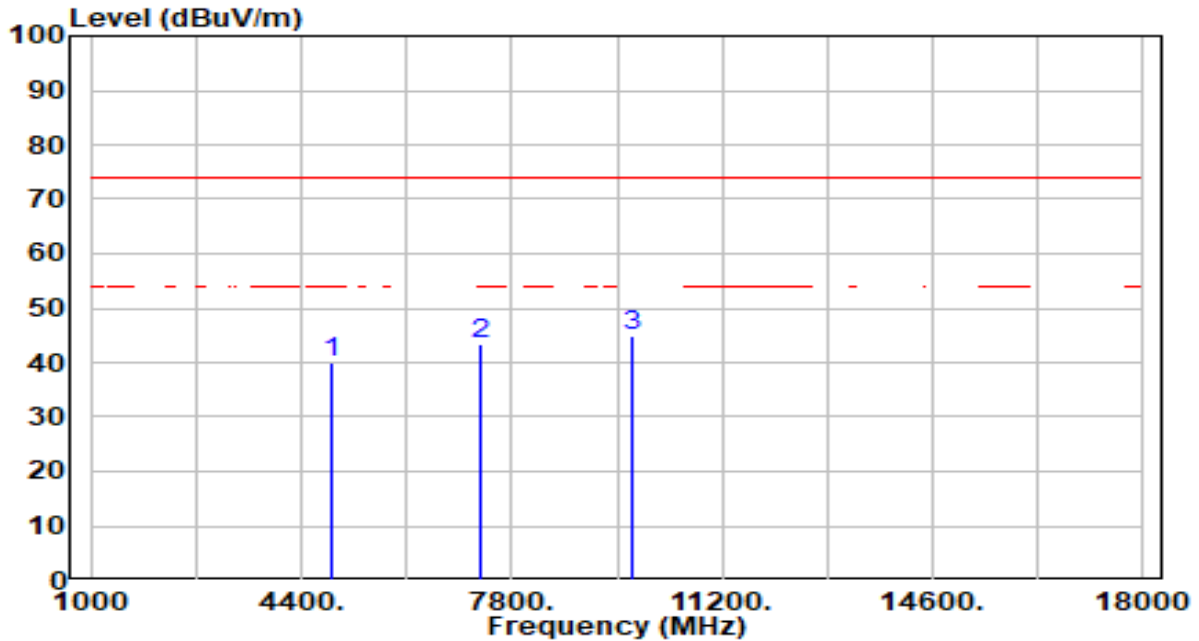


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.78	-0.97	39.82	-34.18	74.00	100	75	Peak
2	7311.000	39.35	3.92	43.27	-30.73	74.00	100	357	Peak
3	* 9748.000	41.78	3.24	45.02	-28.98	74.00	100	43	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

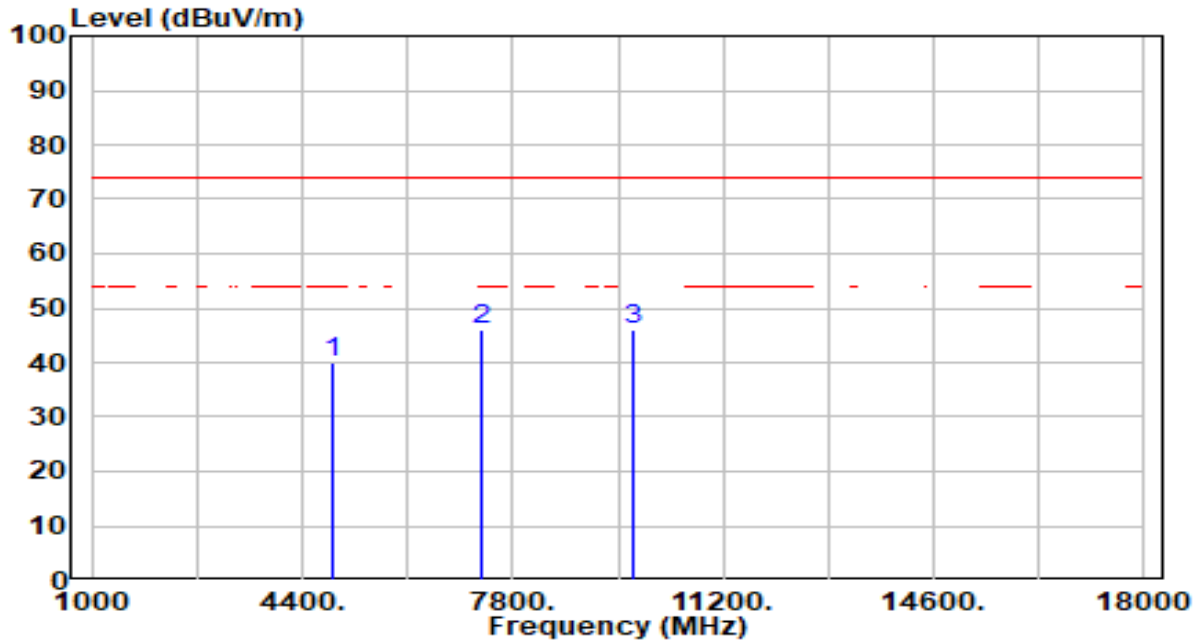


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.00	-0.97	40.03	-33.97	74.00	100	62	Peak
2	* 7311.000	42.23	3.92	46.15	-27.85	74.00	100	90	Peak
3	9748.000	42.62	3.24	45.86	-28.14	74.00	100	197	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 1+2	Test Voltage	By Notebook PC

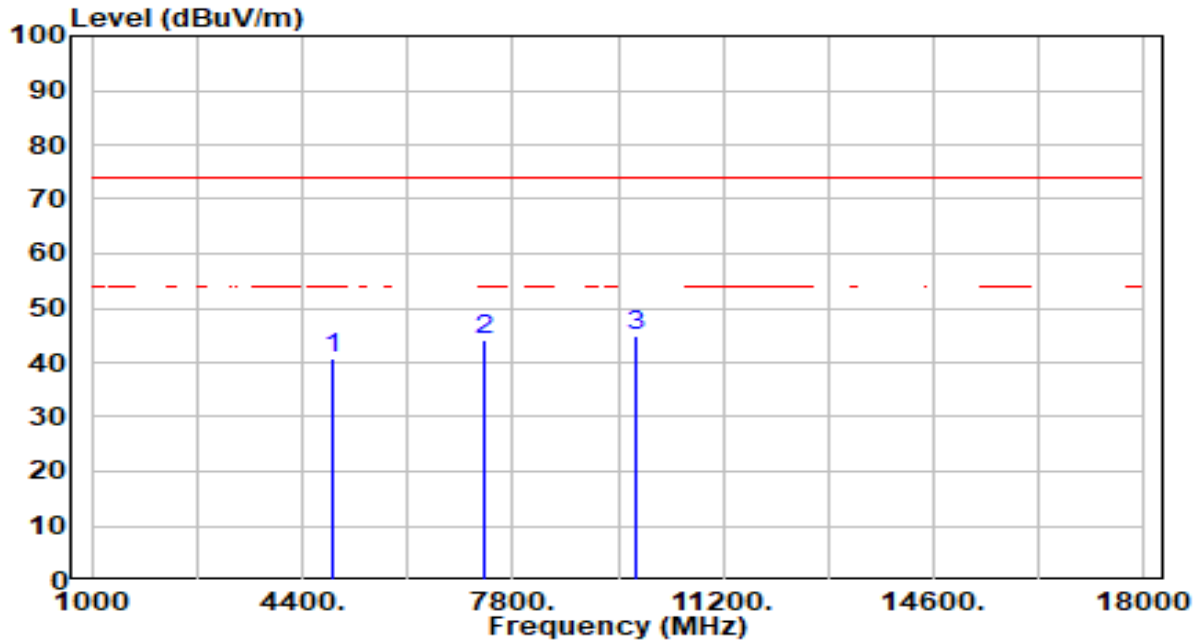


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.73	-0.89	40.84	-33.16	74.00	100	230	Peak
2	7356.000	40.08	3.93	44.01	-29.99	74.00	100	360	Peak
3	* 9808.000	41.82	3.26	45.07	-28.93	74.00	100	71	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 1+2	Test Voltage	By Notebook PC

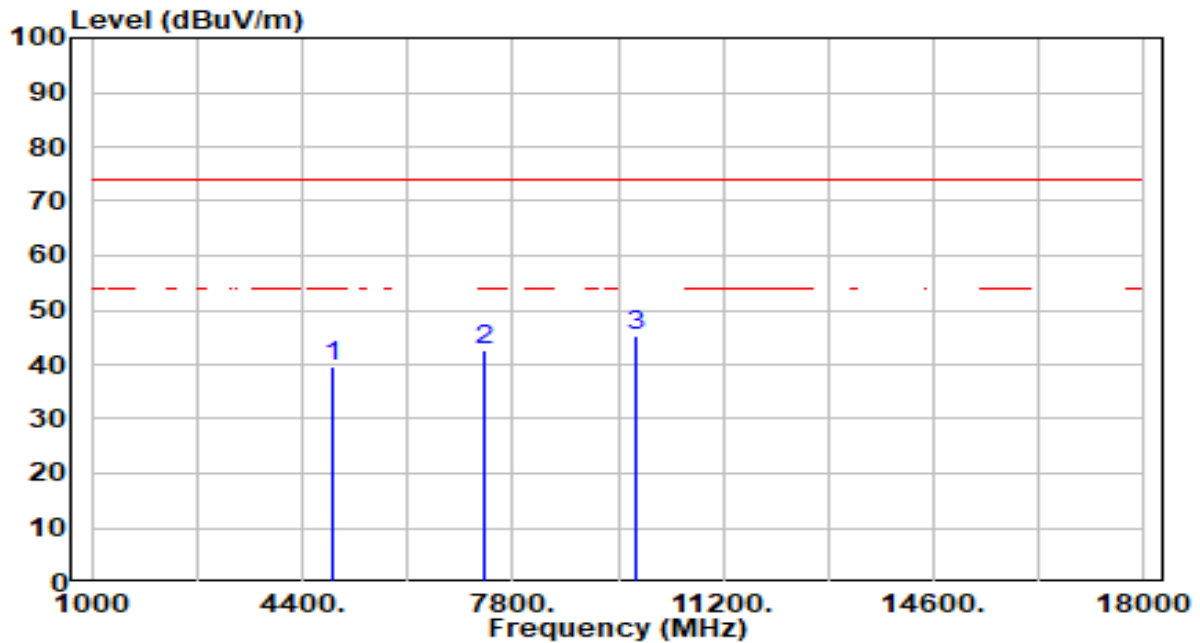


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.59	-0.89	39.70	-34.30	74.00	100	360	Peak
2	7356.000	38.86	3.93	42.79	-31.21	74.00	100	86	Peak
3	* 9808.000	41.97	3.26	45.23	-28.77	74.00	100	309	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

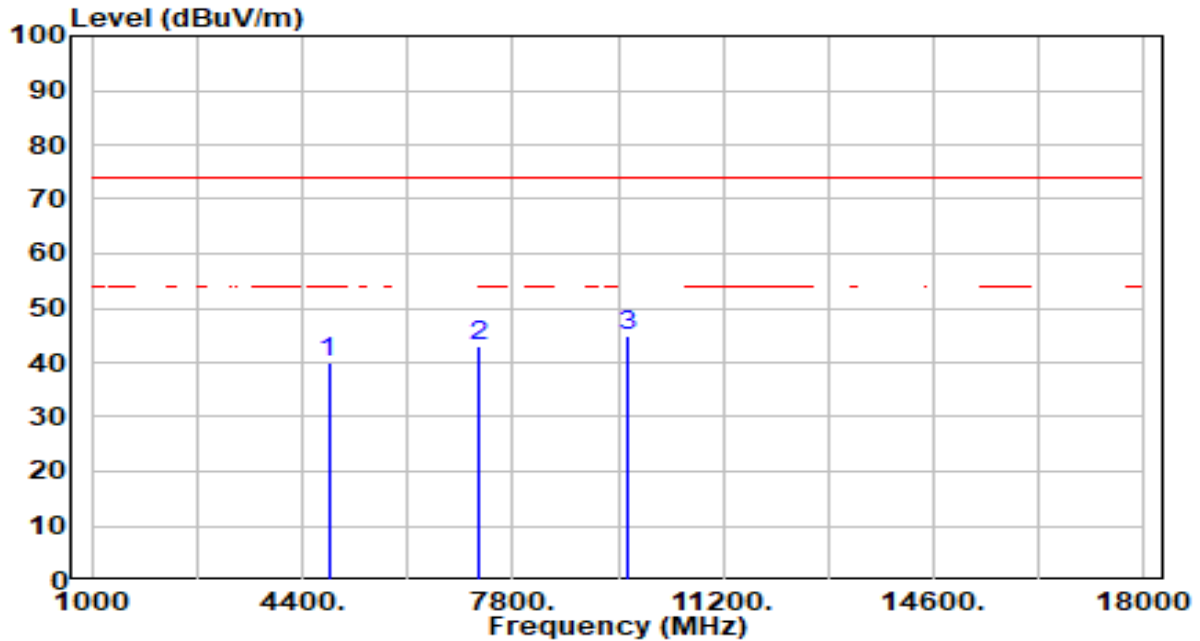


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.04	-1.10	39.94	-34.06	74.00	100	0	Peak
2	7236.000	39.27	3.90	43.17	-30.83	74.00	100	170	Peak
3	* 9648.000	41.60	3.21	44.82	-29.18	74.00	100	278	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

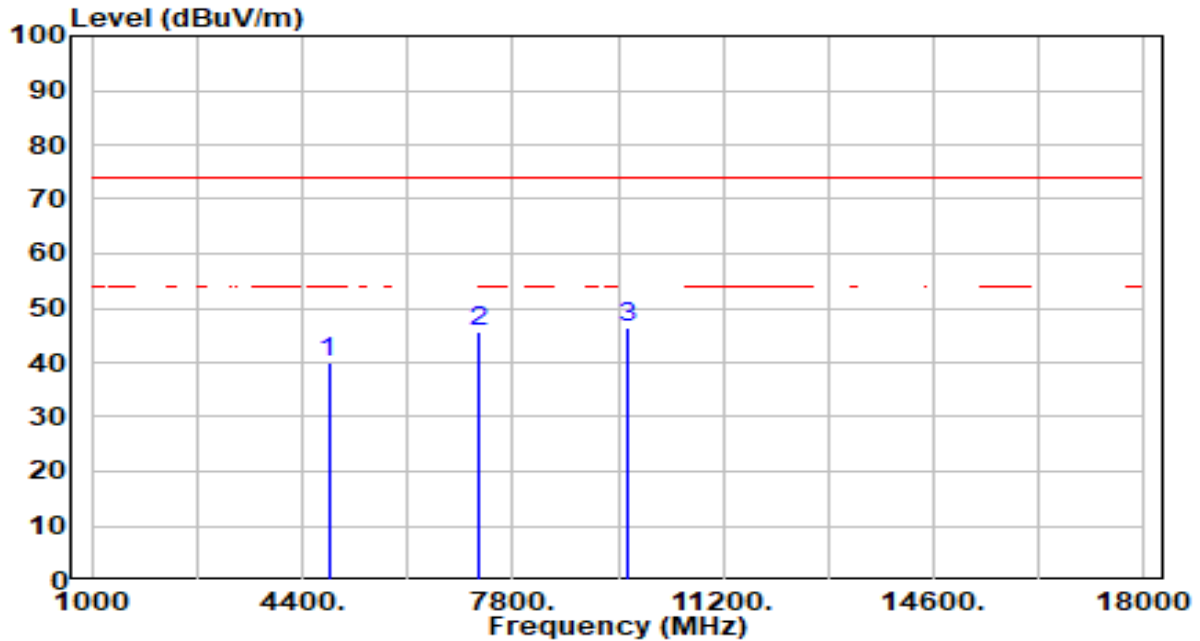


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.11	-1.10	40.02	-33.98	74.00	100	213	Peak
2	7236.000	41.81	3.90	45.72	-28.28	74.00	100	289	Peak
3	* 9648.000	43.23	3.21	46.45	-27.55	74.00	100	301	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

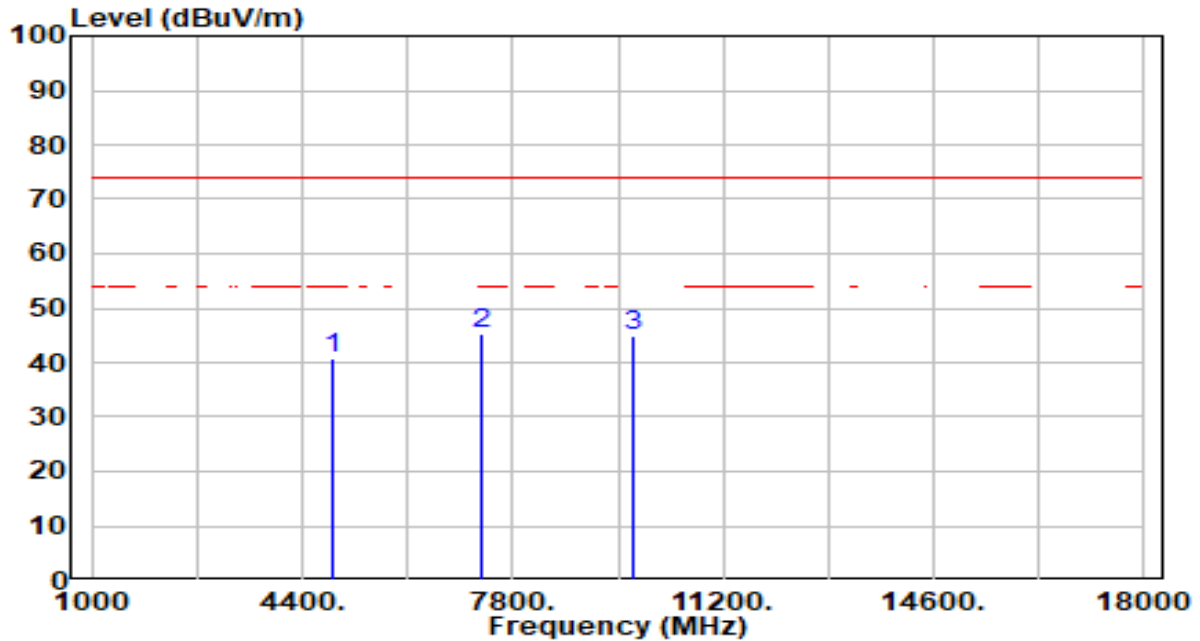


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.55	-0.97	40.58	-33.42	74.00	100	15	Peak
2	* 7311.000	41.30	3.92	45.22	-28.78	74.00	100	206	Peak
3	9748.000	41.79	3.24	45.03	-28.97	74.00	100	1	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

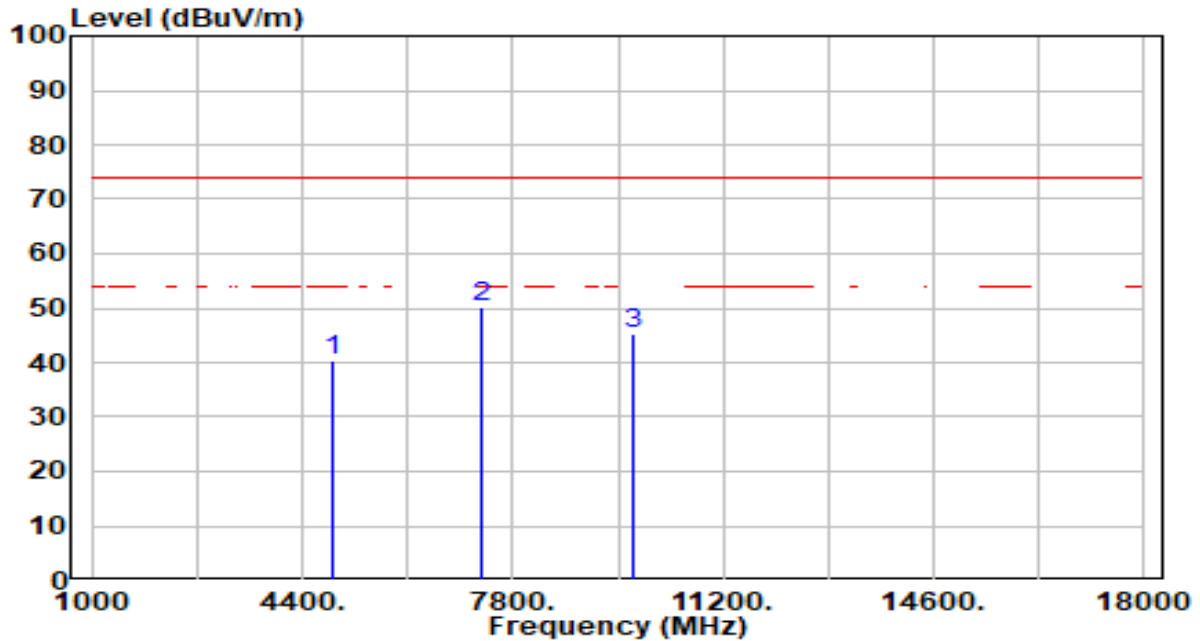


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.43	-0.97	40.47	-33.53	74.00	100	122	Peak
2	* 7311.000	46.24	3.92	50.15	-23.85	74.00	100	86	Peak
3	9748.000	42.06	3.24	45.30	-28.70	74.00	100	277	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

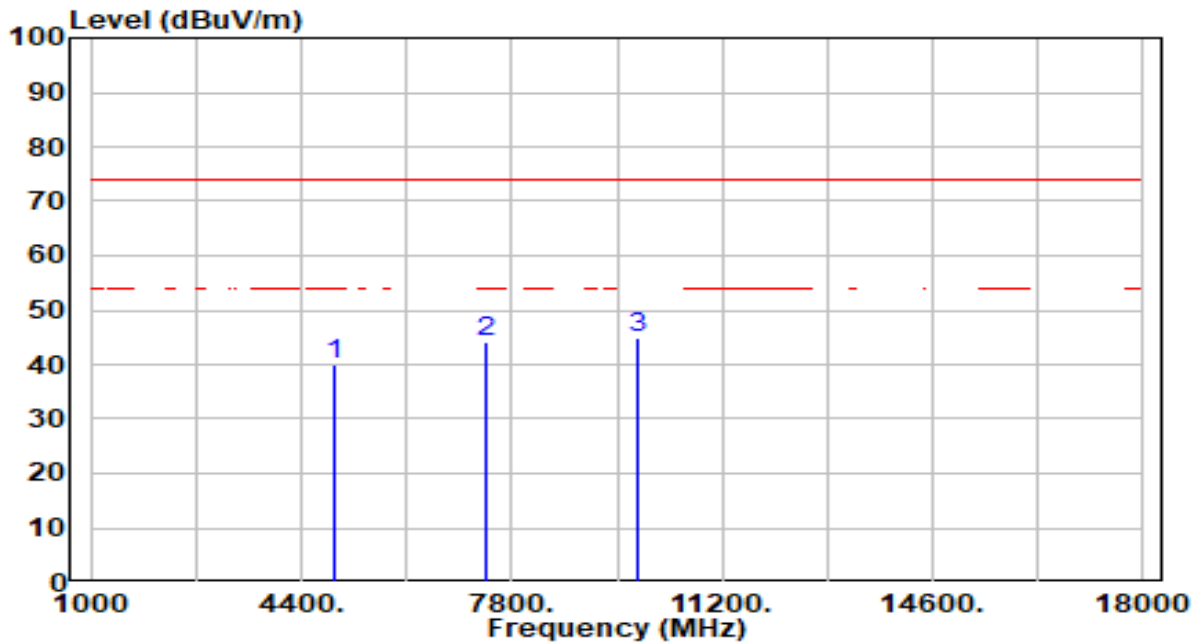


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.93	-0.84	40.10	-33.90	74.00	100	14	Peak
2	7386.000	40.35	3.93	44.29	-29.71	74.00	100	42	Peak
3	* 9848.000	41.53	3.27	44.80	-29.20	74.00	100	360	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

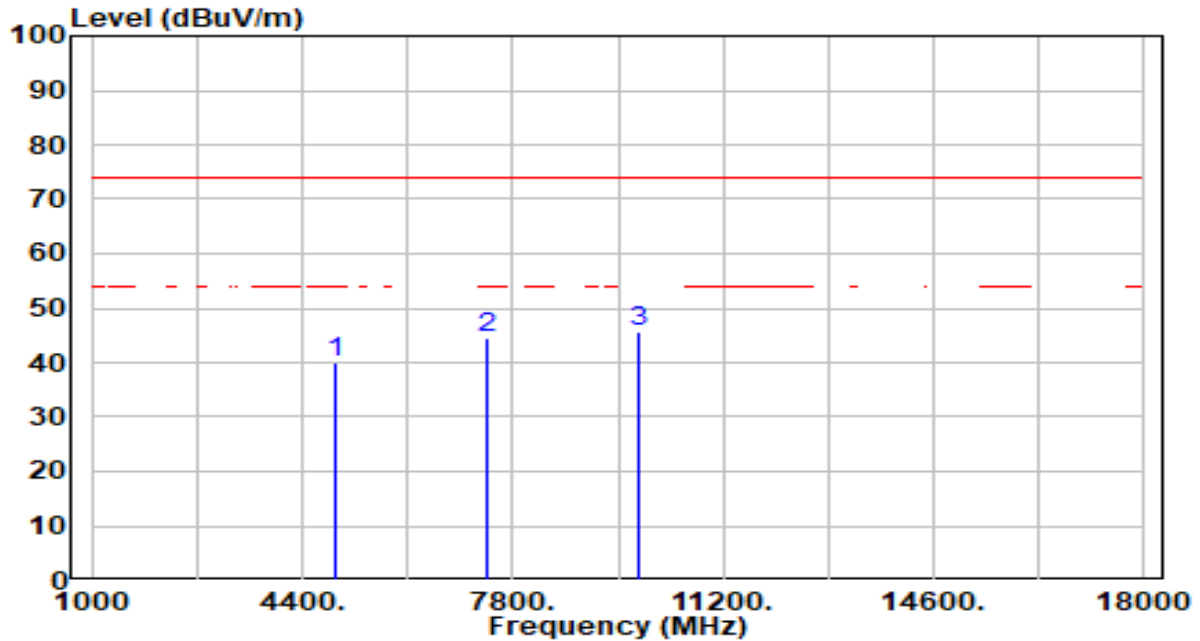


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.85	-0.84	40.01	-33.99	74.00	100	111	Peak
2	7386.000	40.75	3.93	44.69	-29.31	74.00	100	83	Peak
3	* 9848.000	42.43	3.27	45.70	-28.30	74.00	100	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 1+2	Test Voltage	By Notebook PC

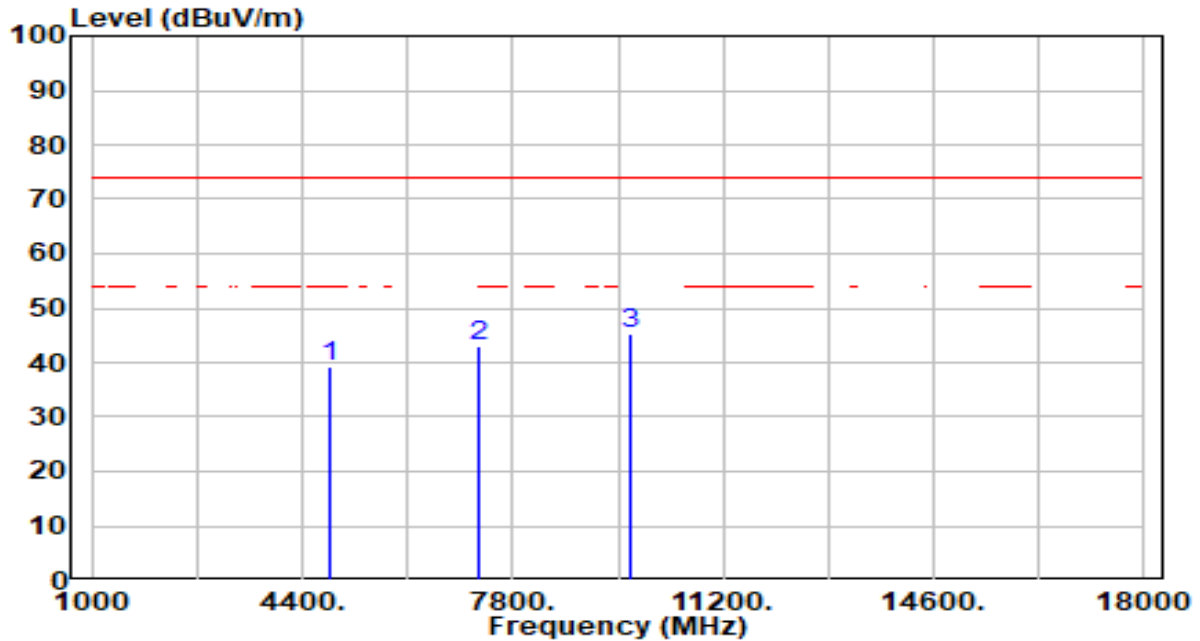


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.46	-1.05	39.41	-34.59	74.00	100	317	Peak
2	7266.000	39.22	3.91	43.13	-30.87	74.00	100	189	Peak
3	* 9688.000	42.06	3.23	45.28	-28.72	74.00	100	1	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 1+2	Test Voltage	By Notebook PC

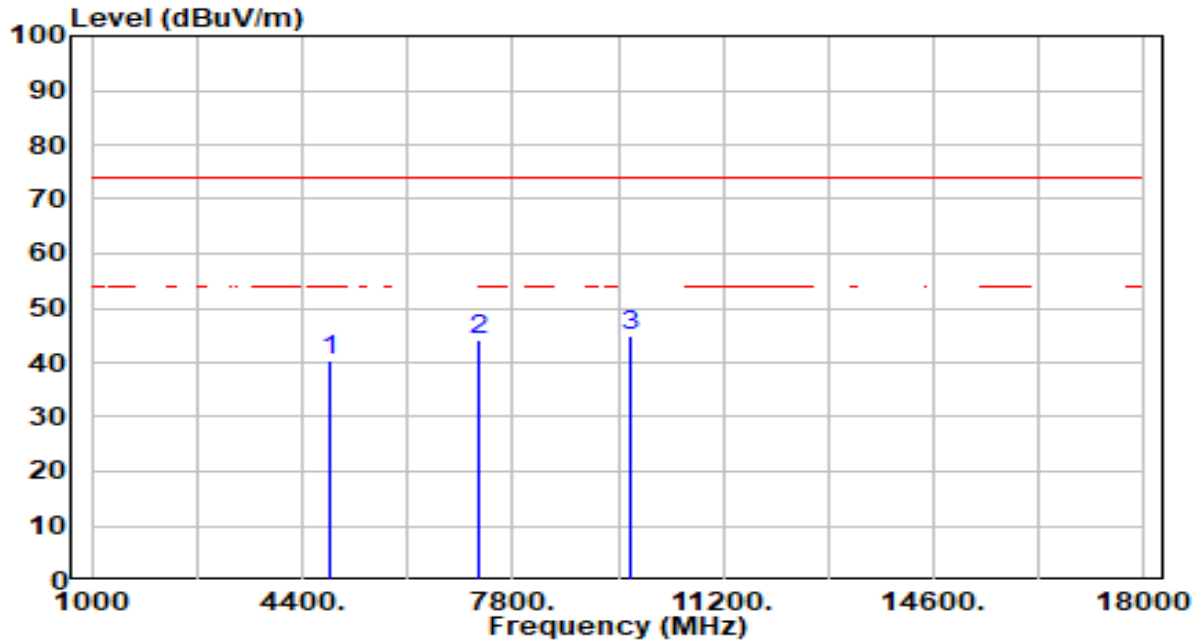


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	41.35	-1.05	40.31	-33.69	74.00	100	337	Peak
2	7266.000	40.12	3.91	44.03	-29.97	74.00	100	285	Peak
3	* 9688.000	41.55	3.23	44.77	-29.23	74.00	100	325	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

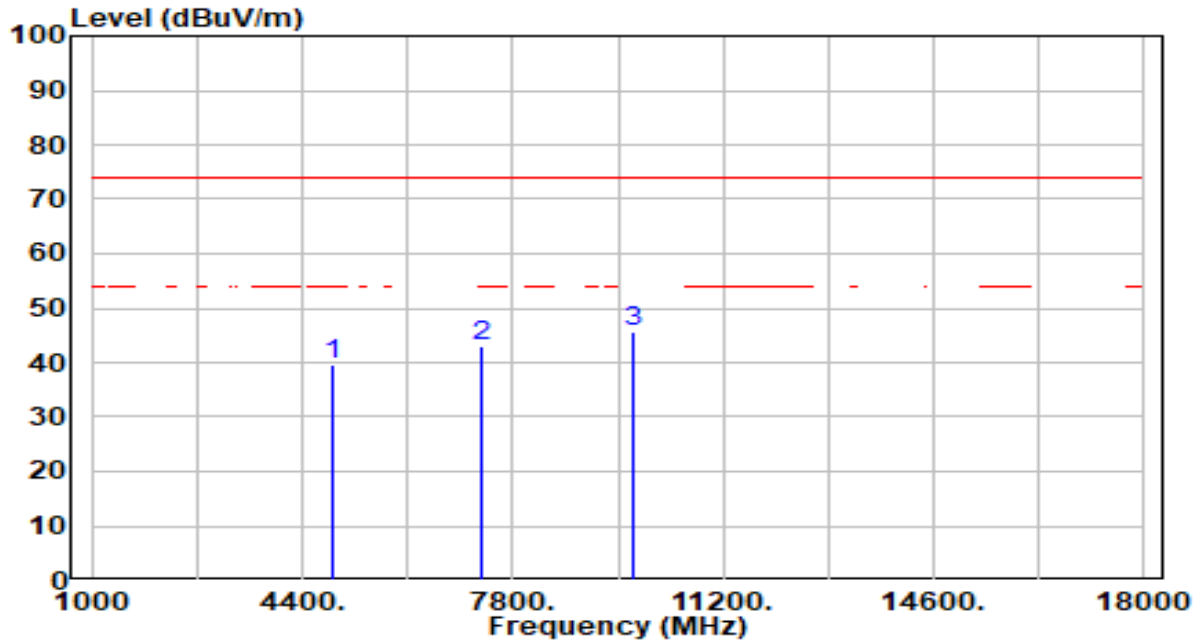


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.72	-0.97	39.76	-34.24	74.00	100	146	Peak
2	7311.000	39.03	3.92	42.95	-31.05	74.00	100	234	Peak
3	* 9748.000	42.37	3.24	45.61	-28.39	74.00	100	250	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

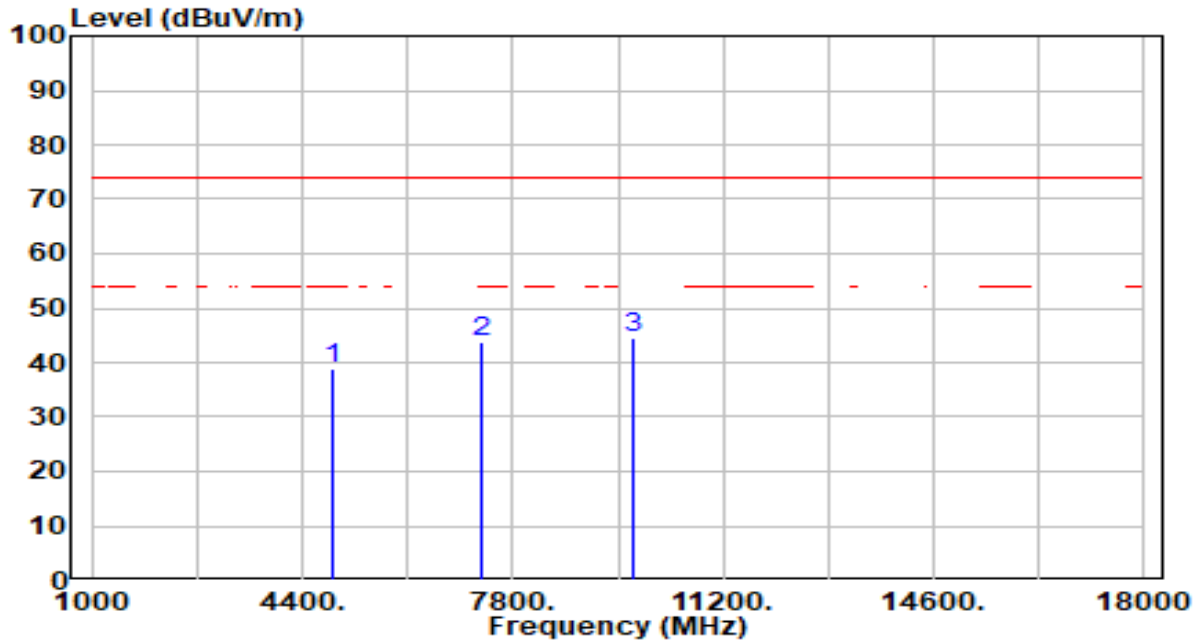


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.01	-0.97	39.04	-34.96	74.00	100	38	Peak
2	7311.000	39.86	3.92	43.78	-30.22	74.00	100	301	Peak
3	* 9748.000	41.28	3.24	44.52	-29.48	74.00	100	126	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 1+2	Test Voltage	By Notebook PC

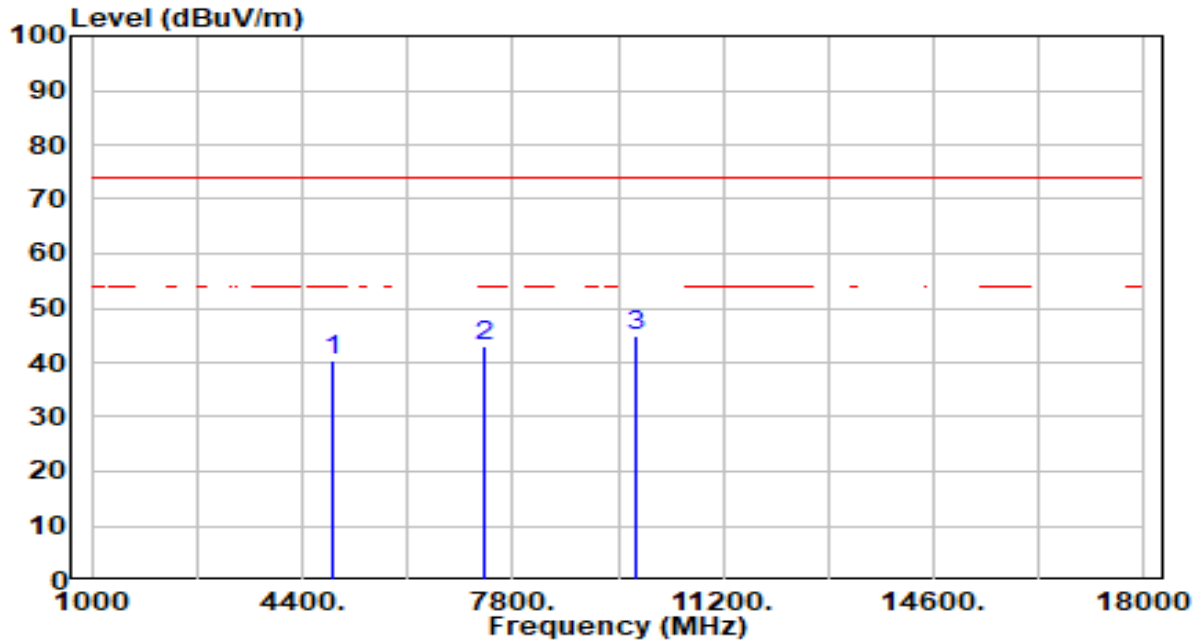


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.12	-0.89	40.23	-33.77	74.00	100	38	Peak
2	7356.000	39.24	3.93	43.17	-30.83	74.00	100	269	Peak
3	* 9808.000	41.57	3.26	44.82	-29.18	74.00	100	150	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 1+2	Test Voltage	By Notebook PC

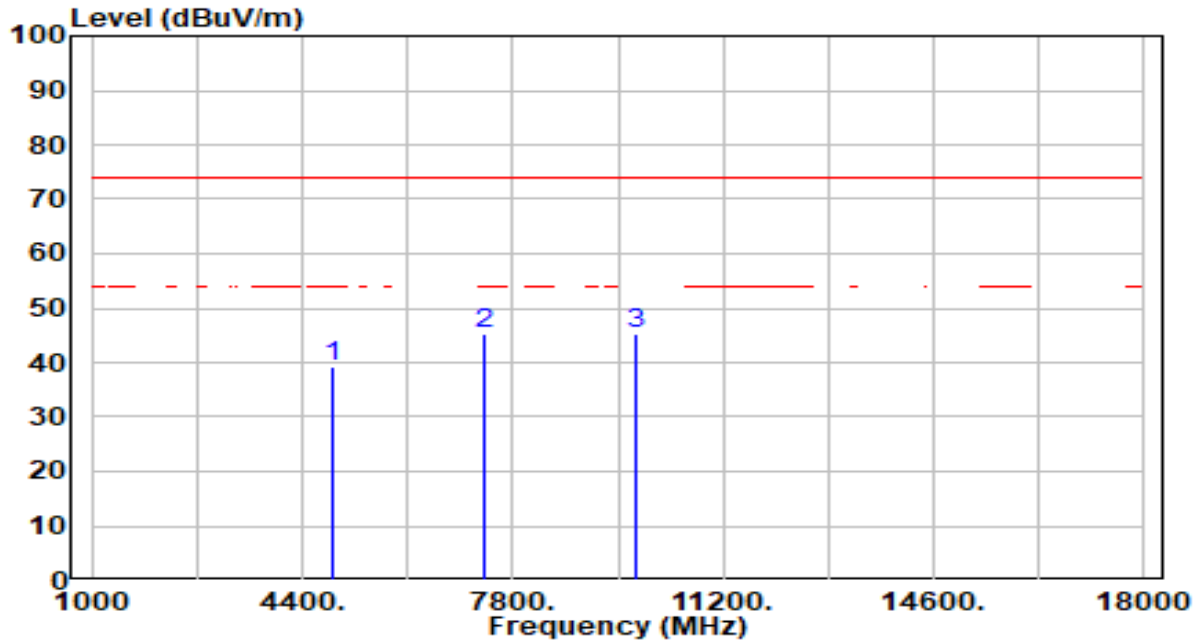

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.24	-0.89	39.35	-34.65	74.00	100	142	Peak
2	7356.000	41.46	3.93	45.39	-28.61	74.00	100	70	Peak
3	* 9808.000	42.17	3.26	45.42	-28.58	74.00	100	337	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

**For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.7.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

### 7.7.3. Test Setting

#### Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 7.7.4. Test Setup

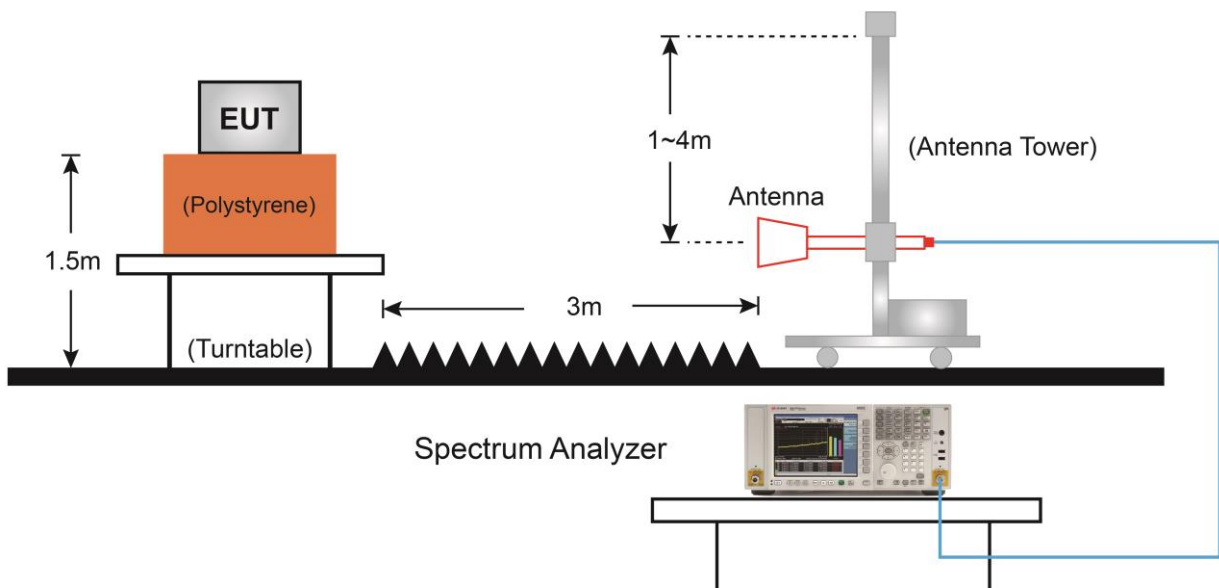

### 7.7.5. Test Result

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

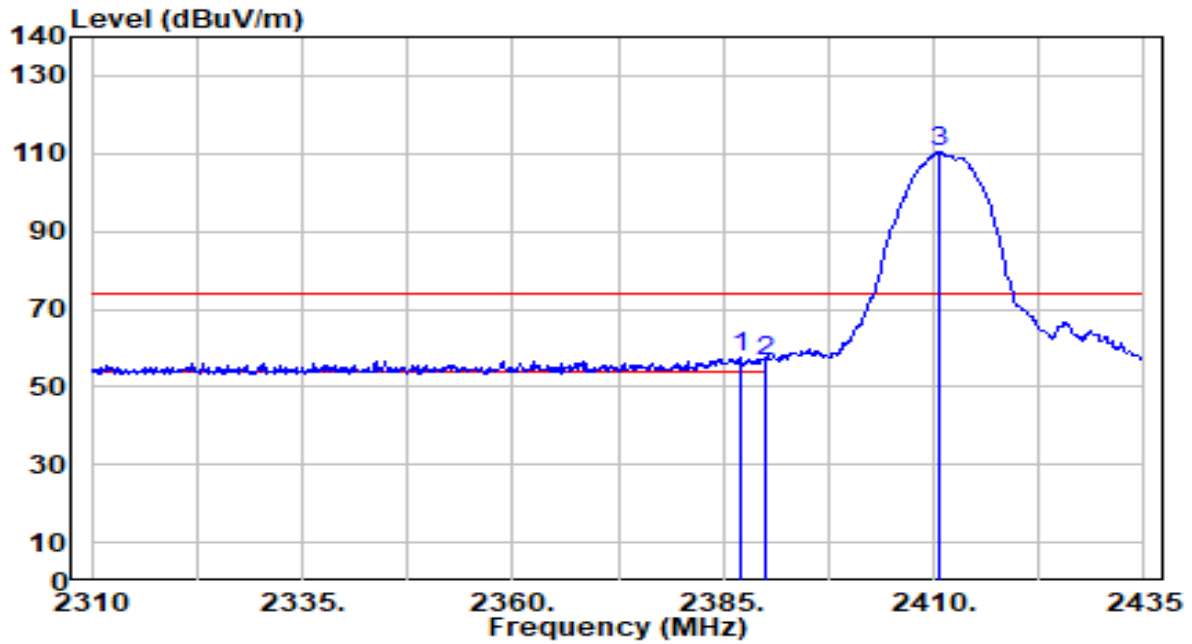


hh

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	27.49	30.17	57.67	-16.33	74.00	300	2	Peak
2		26.45	30.18	56.63	-17.37	74.00	300	2	Peak
3		80.09	30.22	110.31	N/A	N/A	300	2	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

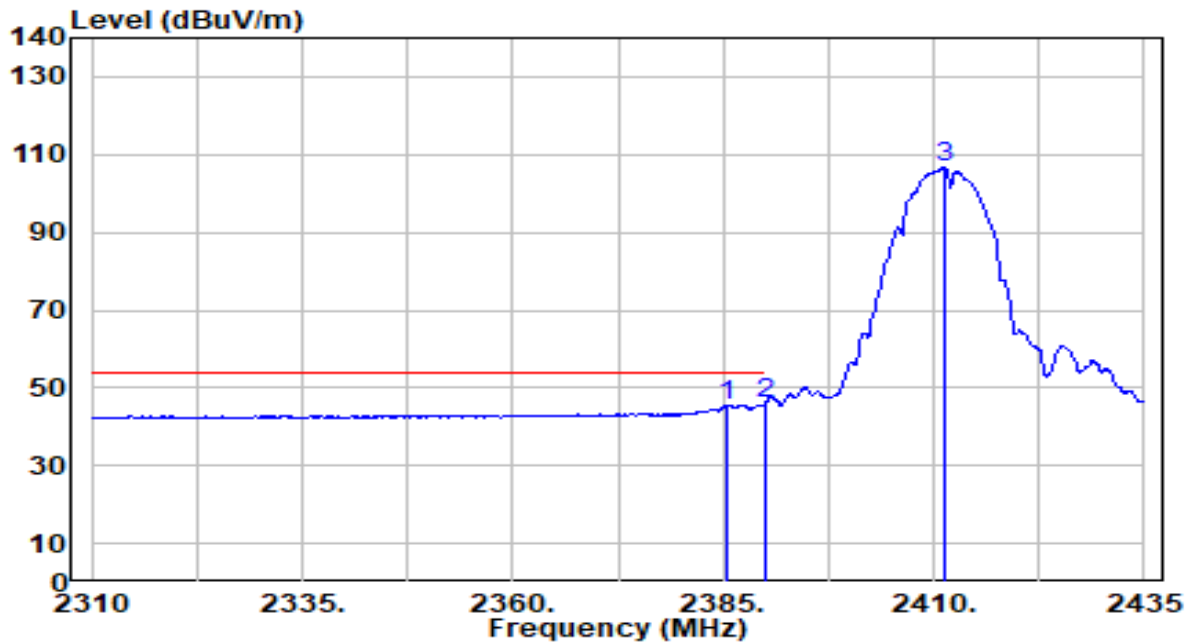


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.500	15.51	30.17	45.68	-8.32	54.00	300	2	Average
2	* 2390.000	15.69	30.18	45.87	-8.13	54.00	300	2	Average
3	2411.250	76.47	30.22	106.69	N/A	N/A	300	2	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

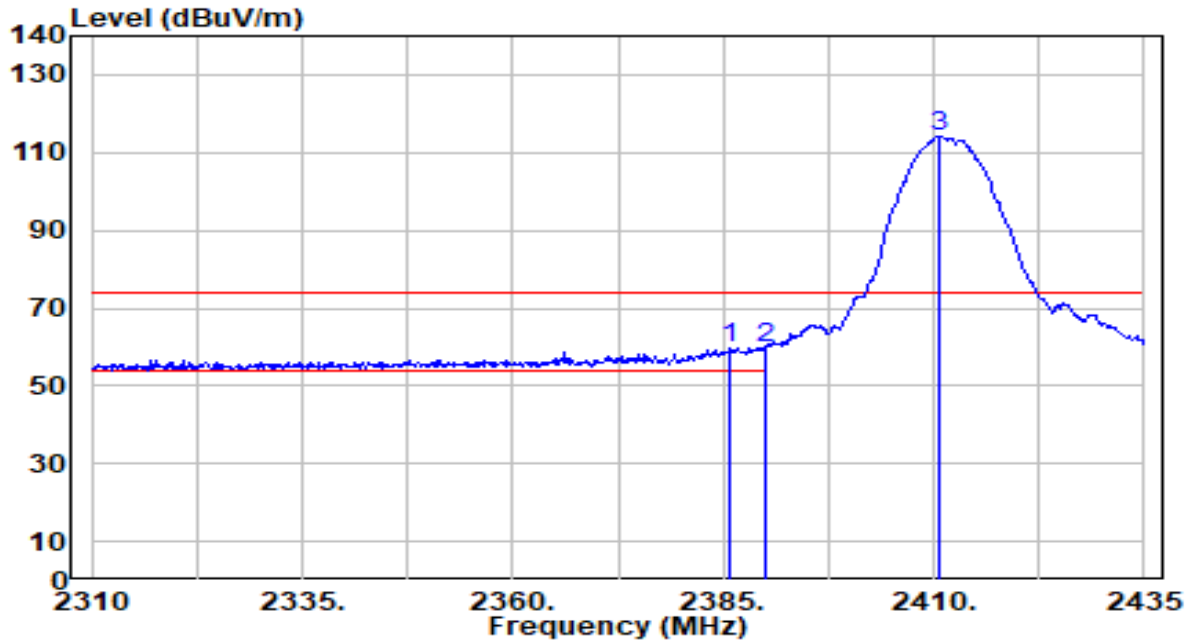


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2385.875	29.70	30.17	59.87	-14.13	74.00	300	62	Peak
2		2390.000	29.50	30.18	59.68	-14.32	74.00	300	62	Peak
3		2410.625	83.96	30.22	114.18	N/A	N/A	300	62	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

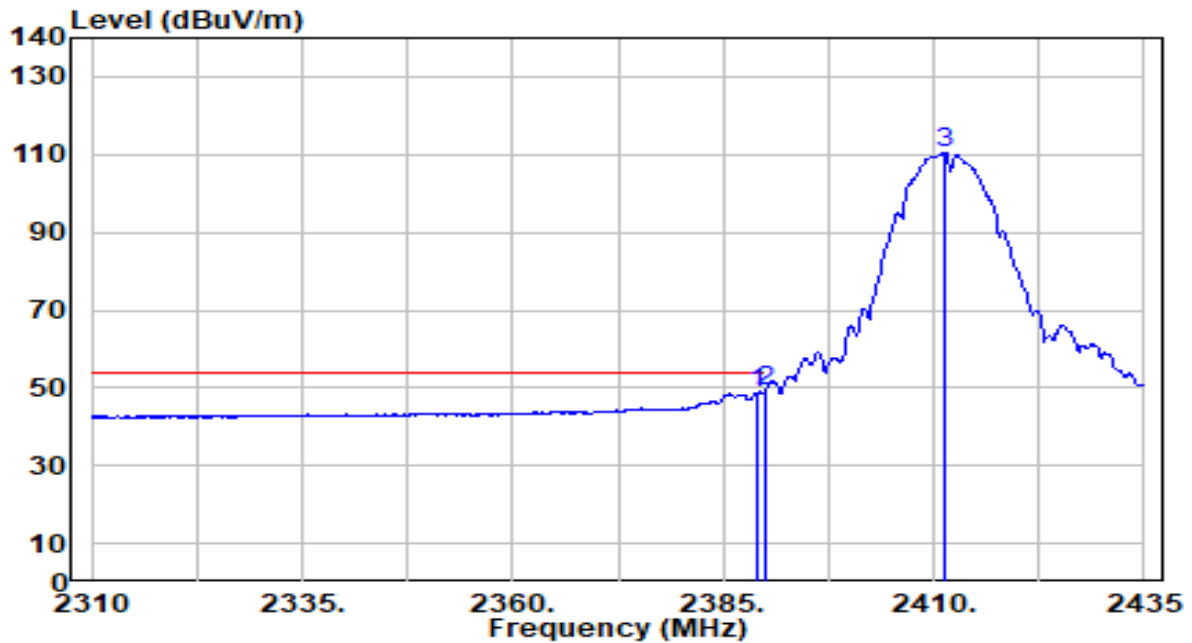


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	18.38	30.18	48.56	-5.44	54.00	300	62	Average
2	* 2390.000	19.09	30.18	49.27	-4.73	54.00	300	62	Average
3	2411.250	80.31	30.22	110.53	N/A	N/A	300	62	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

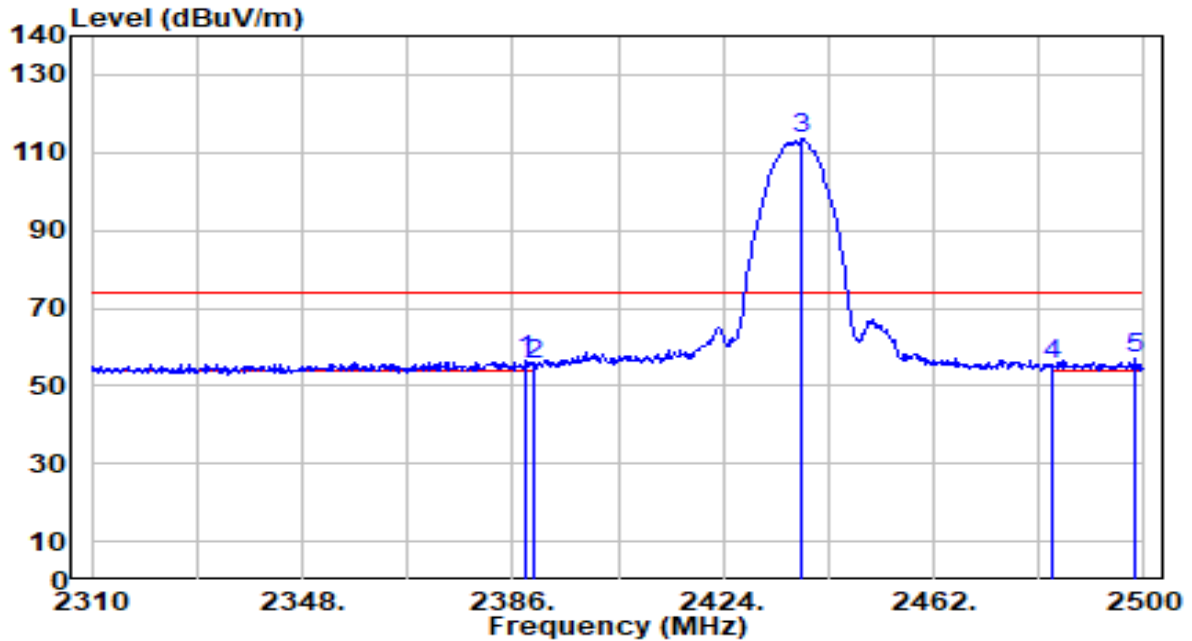


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	26.17	30.17	56.34	-17.66	74.00	203	181	Peak
2	2390.000	25.07	30.18	55.25	-18.75	74.00	203	181	Peak
3	2438.250	83.16	30.26	113.42	N/A	N/A	203	181	Peak
4	2483.500	24.97	30.32	55.29	-18.71	74.00	203	181	Peak
5	* 2498.290	26.66	30.34	57.00	-17.00	74.00	203	181	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

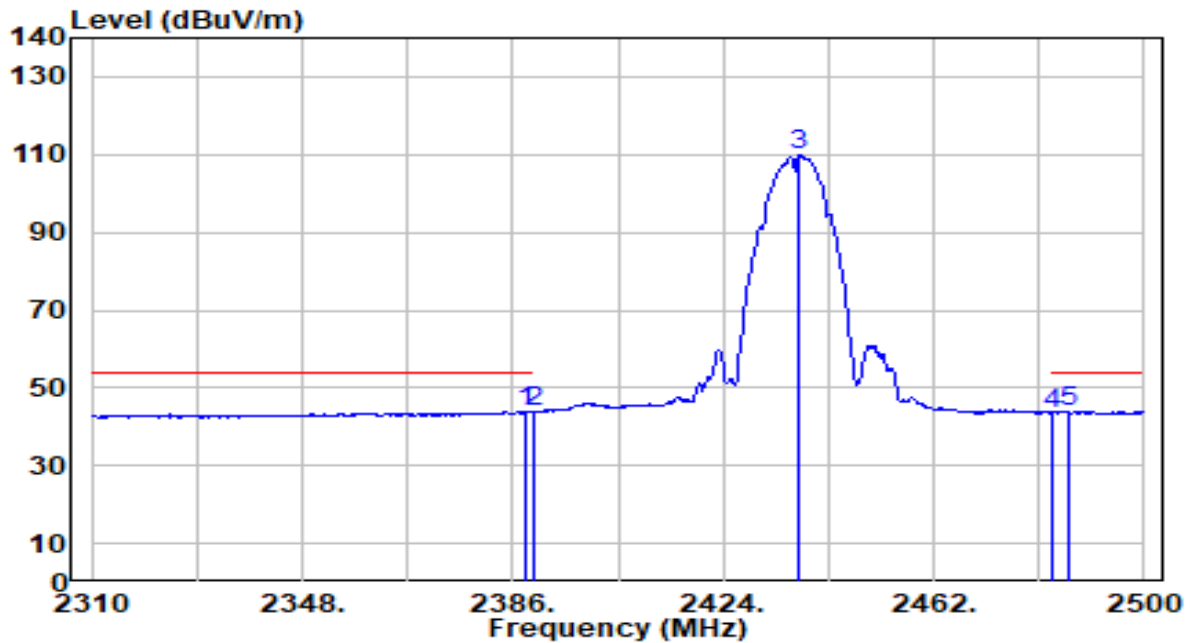


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.470	13.75	30.18	43.93	-10.07	54.00	203	181	Average
2	2390.000	13.51	30.18	43.69	-10.31	54.00	203	181	Average
3	2437.680	79.55	30.26	109.81	N/A	N/A	203	181	Average
4	2483.500	13.15	30.32	43.47	-10.53	54.00	203	181	Average
5	2486.320	13.54	30.32	43.86	-10.14	54.00	203	181	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

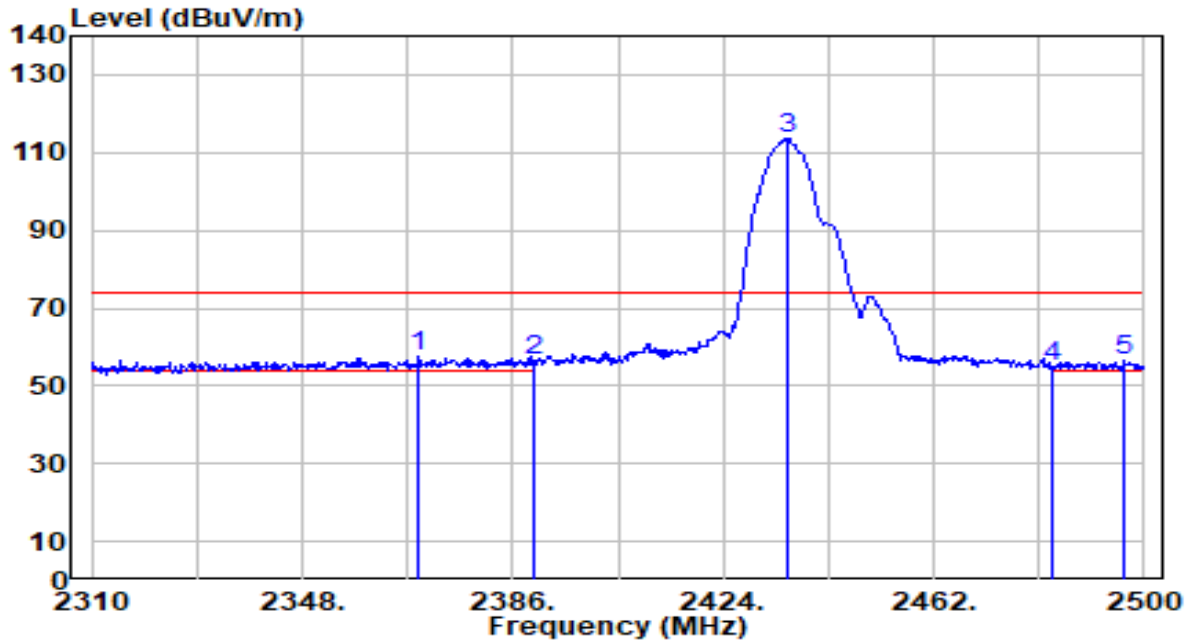


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2369.090	27.20	30.12	57.33	-16.67	74.00	194	247	Peak
2	2390.000	26.35	30.18	56.53	-17.47	74.00	194	247	Peak
3	2435.590	83.32	30.25	113.57	N/A	N/A	194	247	Peak
4	2483.500	24.54	30.32	54.86	-19.14	74.00	194	247	Peak
5	2496.580	26.25	30.34	56.59	-17.41	74.00	194	247	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

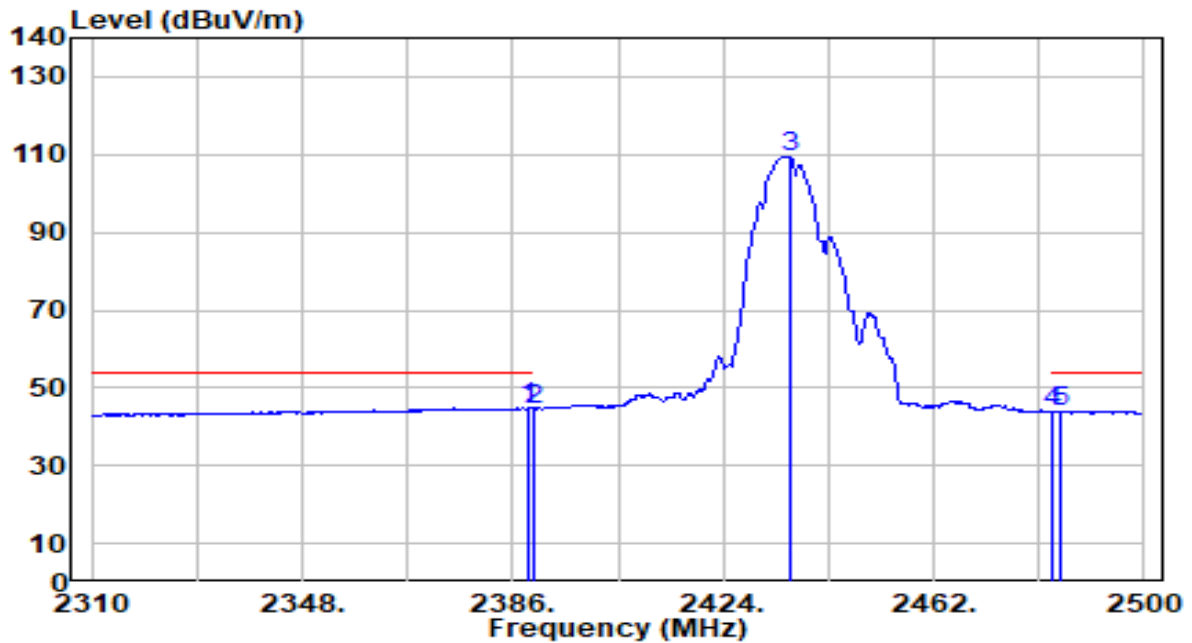


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.040	14.65	30.18	44.83	-9.17	54.00	194	247	Average
2	2390.000	14.41	30.18	44.59	-9.41	54.00	194	247	Average
3	2436.160	79.25	30.26	109.51	N/A	N/A	194	247	Average
4	2483.500	13.42	30.32	43.74	-10.26	54.00	194	247	Average
5	2484.990	13.71	30.32	44.03	-9.97	54.00	194	247	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

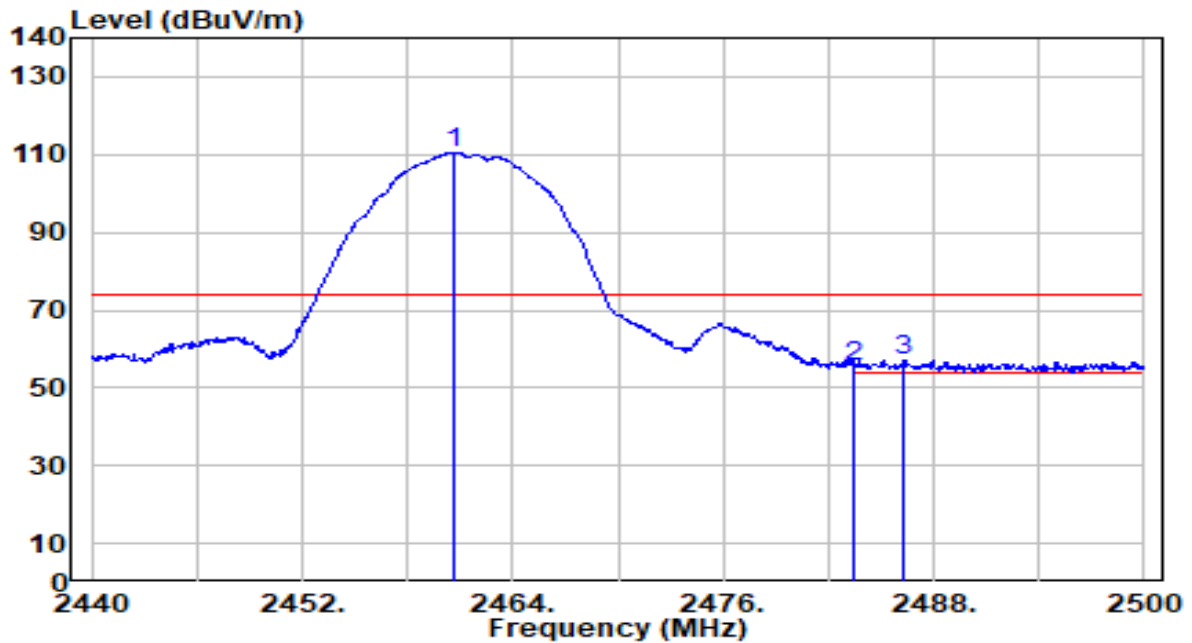


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.580	80.27	30.29	110.56	N/A	N/A	302	13	Peak
2	2483.500	25.16	30.32	55.48	-18.52	74.00	302	13	Peak
3	* 2486.320	26.85	30.32	57.17	-16.83	74.00	302	13	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

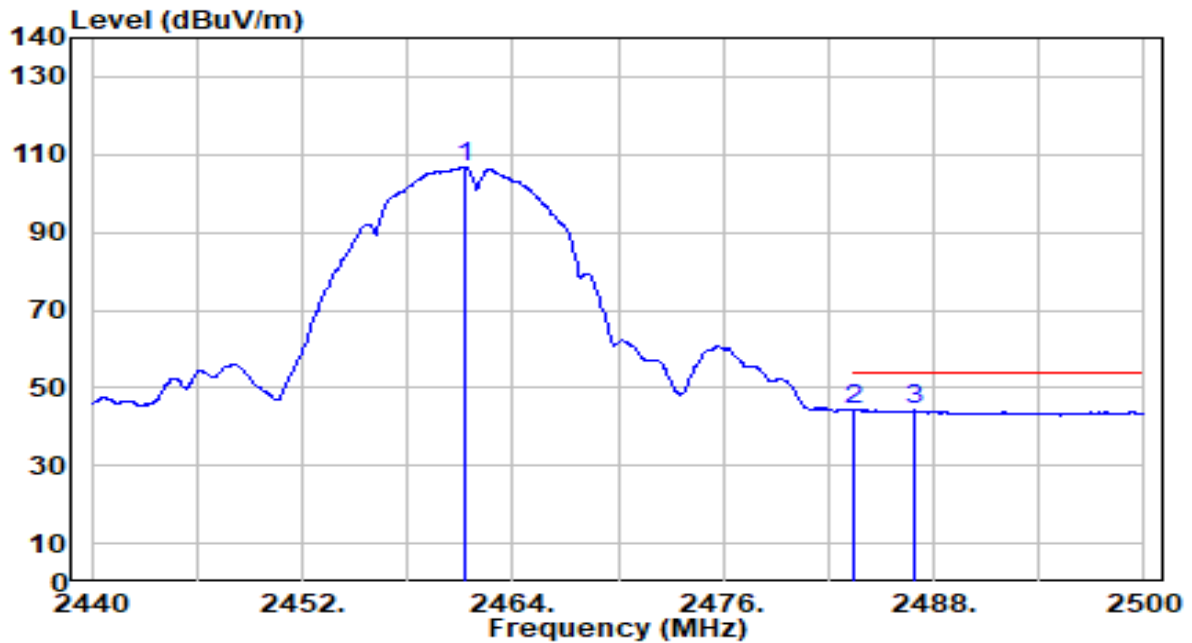


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	76.57	30.29	106.86	N/A	N/A	302	13	Average
2	* 2483.500	14.14	30.32	44.46	-9.54	54.00	302	13	Average
3	2486.920	13.85	30.32	44.18	-9.82	54.00	302	13	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

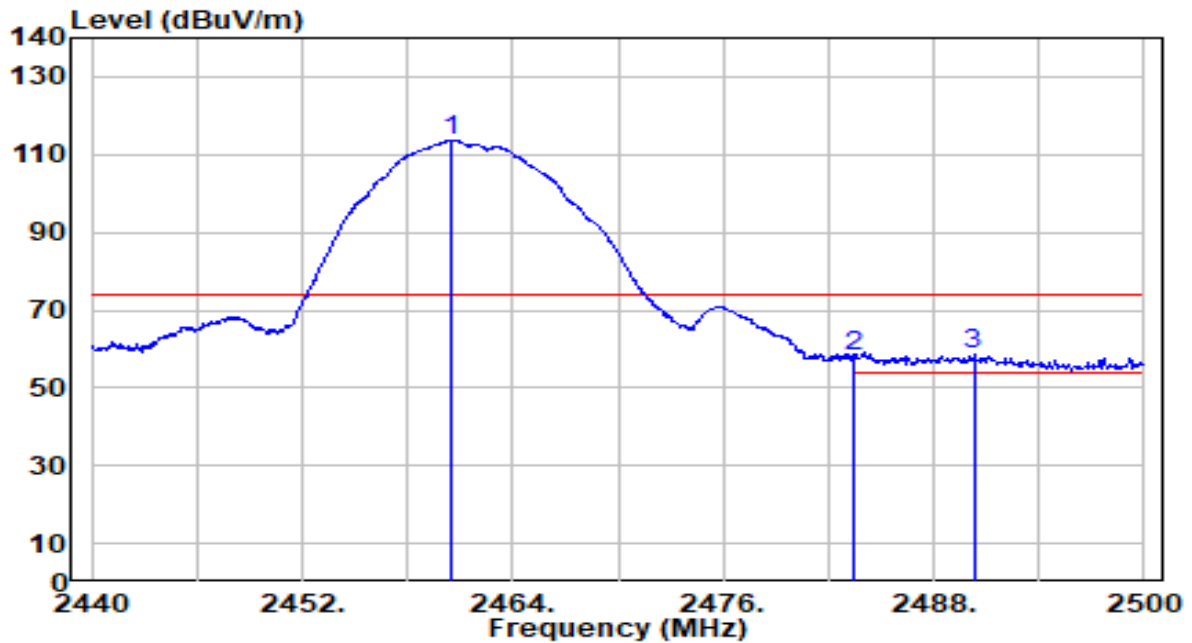


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.520	83.31	30.29	113.60	N/A	N/A	300	55	Peak
2	2483.500	27.82	30.32	58.14	-15.86	74.00	300	55	Peak
3	* 2490.280	28.17	30.33	58.49	-15.51	74.00	300	55	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

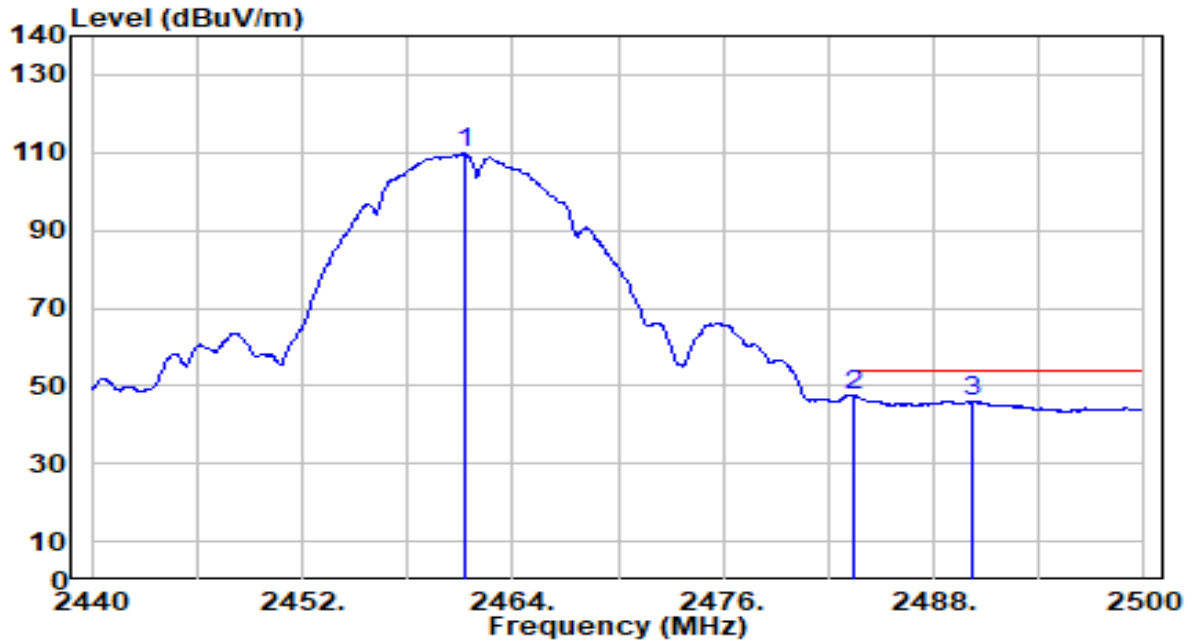


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	79.43	30.29	109.72	N/A	N/A	300	55	Average
2	* 2483.500	17.18	30.32	47.50	-6.50	54.00	300	55	Average
3	2490.160	15.84	30.33	46.17	-7.83	54.00	300	55	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

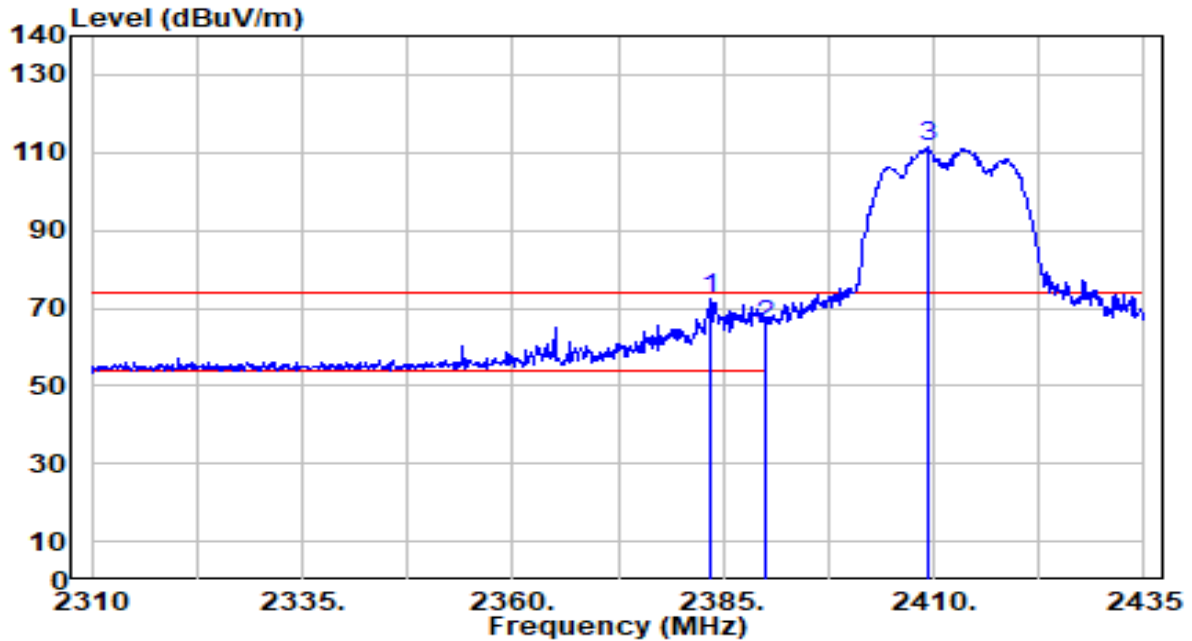


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2383.625	42.11	30.16	72.27	-1.73	74.00	200	214	Peak
2	2390.000	35.20	30.18	65.38	-8.62	74.00	200	214	Peak
3	2409.375	81.07	30.22	111.29	N/A	N/A	200	214	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

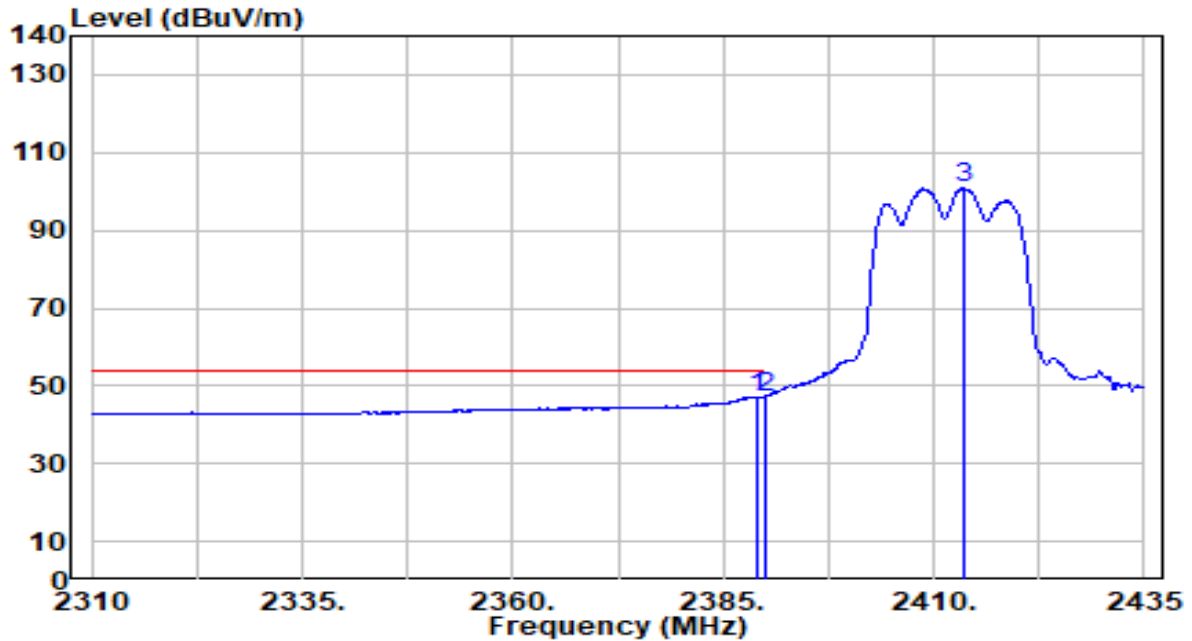


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.000	17.05	30.18	47.23	-6.77	54.00	200	214	Average
2		2390.000	16.97	30.18	47.15	-6.85	54.00	200	214	Average
3		2413.625	70.58	30.23	100.80	N/A	N/A	200	214	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

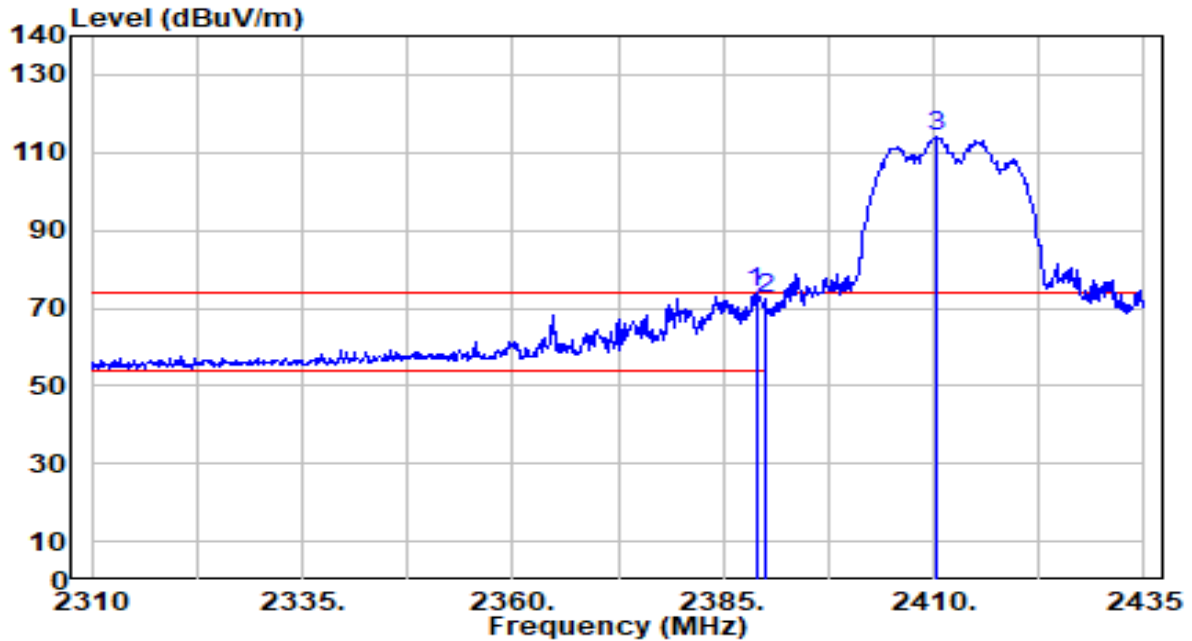


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.875	43.68	30.18	73.85	-0.15	74.00	250	249	Peak
2	2390.000	42.05	30.18	72.23	-1.77	74.00	250	249	Peak
3	2410.250	83.84	30.22	114.07	N/A	N/A	250	249	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

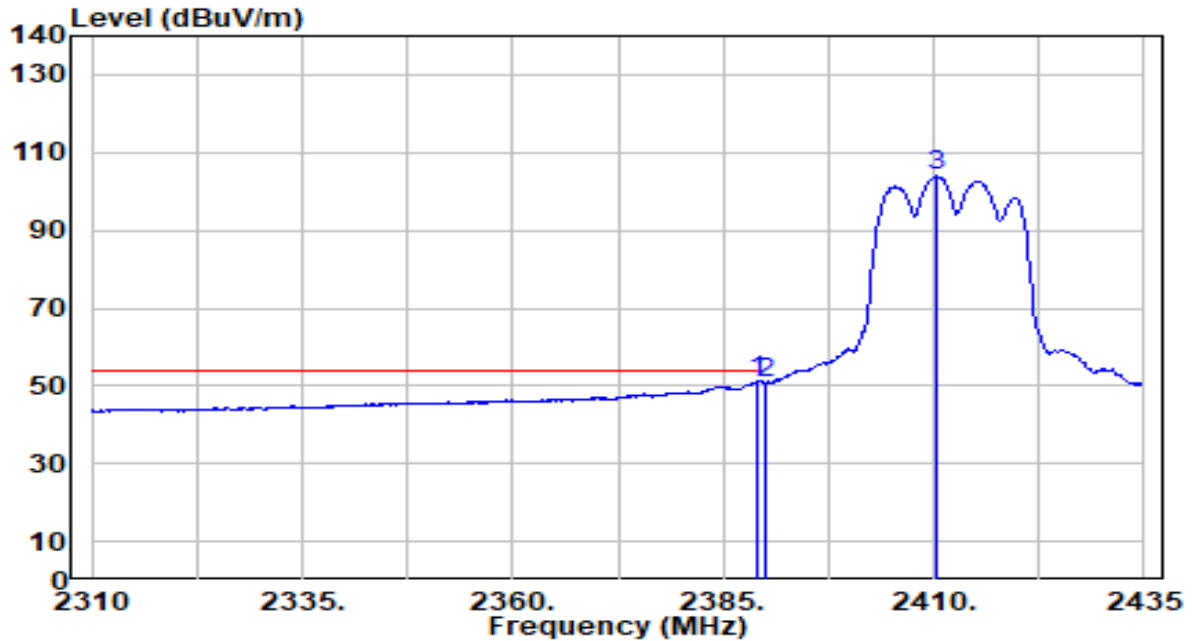


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.000	21.01	30.18	51.19	-2.81	54.00	250	249	Average
2	2390.000	20.72	30.18	50.90	-3.10	54.00	250	249	Average
3	2410.375	73.63	30.22	103.86	N/A	N/A	250	249	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

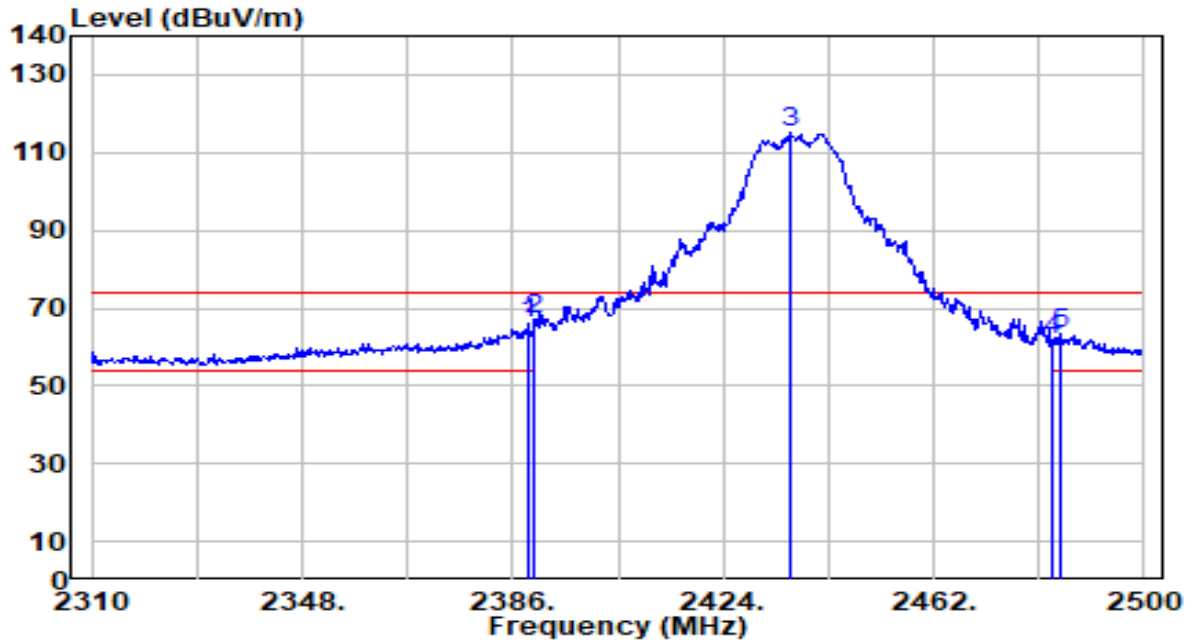


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	36.08	30.18	66.26	-7.74	74.00	205	182	Peak
2	* 2390.000	37.02	30.18	67.20	-6.80	74.00	205	182	Peak
3	2436.350	84.70	30.26	114.96	N/A	N/A	205	182	Peak
4	2483.500	31.29	30.32	61.60	-12.40	74.00	205	182	Peak
5	2484.800	32.87	30.32	63.19	-10.81	74.00	205	182	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

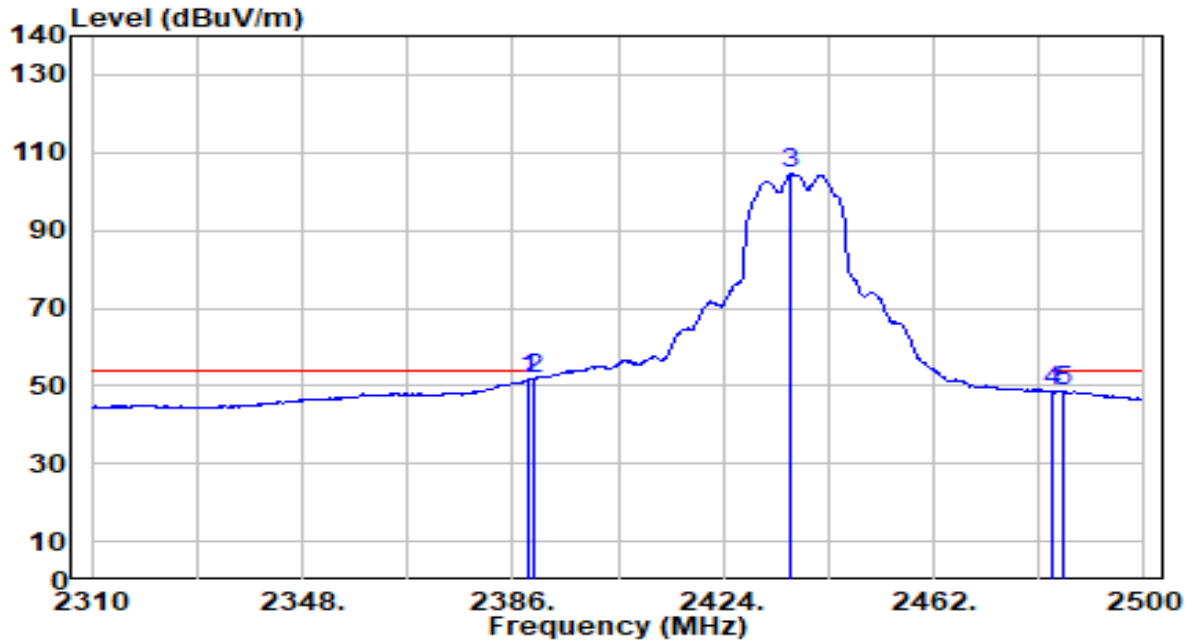


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	21.57	30.18	51.74	-2.26	54.00	205	182	Average
2	* 2390.000	21.68	30.18	51.86	-2.14	54.00	205	182	Average
3	2436.350	74.21	30.26	104.47	N/A	N/A	205	182	Average
4	2483.500	18.15	30.32	48.47	-5.53	54.00	205	182	Average
5	2485.180	18.30	30.32	48.62	-5.38	54.00	205	182	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

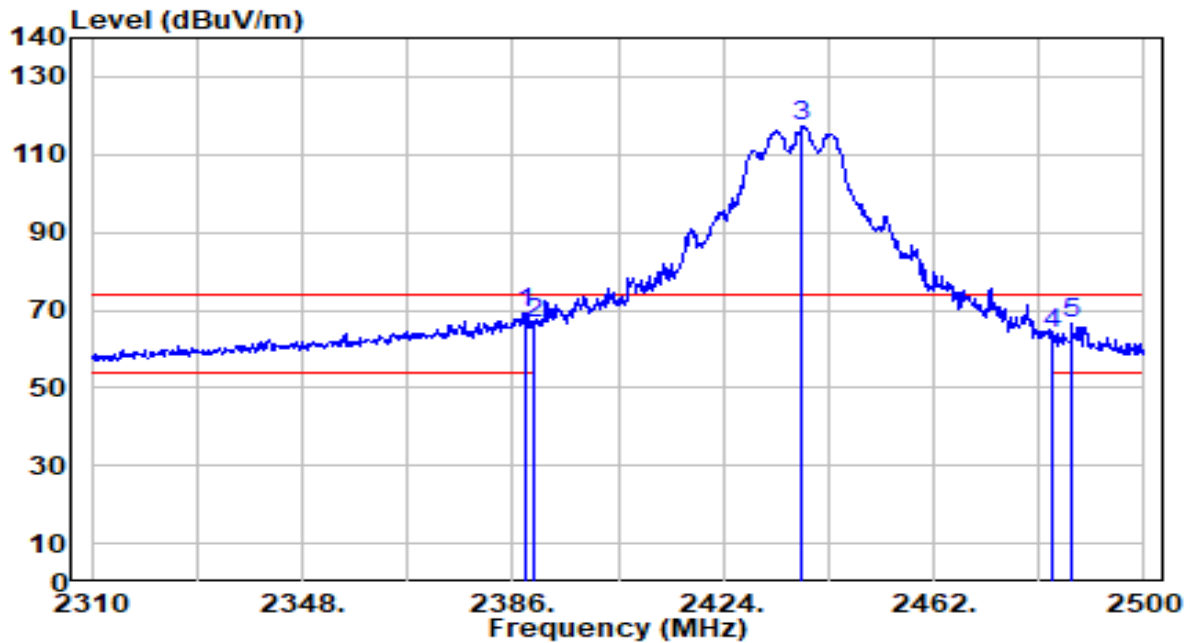


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.470	39.25	30.18	69.42	-4.58	74.00	193	247	Peak
2	2390.000	36.62	30.18	66.80	-7.20	74.00	193	247	Peak
3	2438.250	87.03	30.26	117.29	N/A	N/A	193	247	Peak
4	2483.500	33.65	30.32	63.96	-10.04	74.00	193	247	Peak
5	2486.890	36.13	30.32	66.45	-7.55	74.00	193	247	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

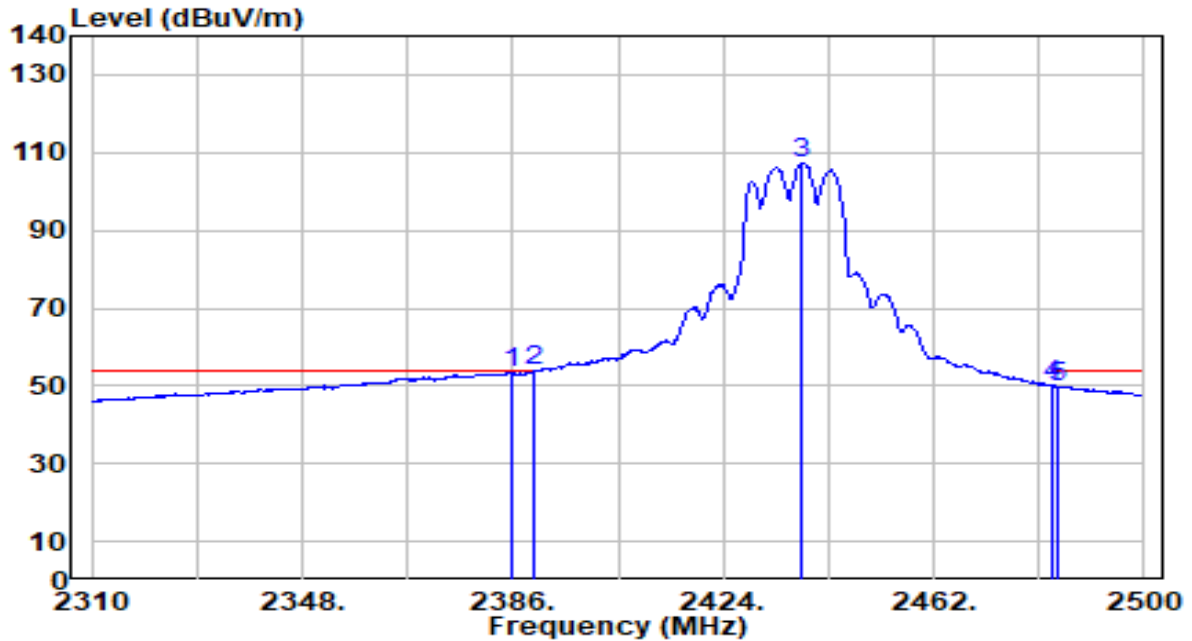


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	23.21	30.17	53.38	-0.62	54.00	193	247	Average
2	* 2390.000	23.46	30.18	53.64	-0.16	54.00	193	247	Average
3	2438.250	77.21	30.26	107.47	N/A	N/A	193	247	Average
4	2483.500	19.64	30.32	49.96	-4.04	54.00	193	247	Average
5	2484.230	19.56	30.32	49.88	-4.12	54.00	193	247	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

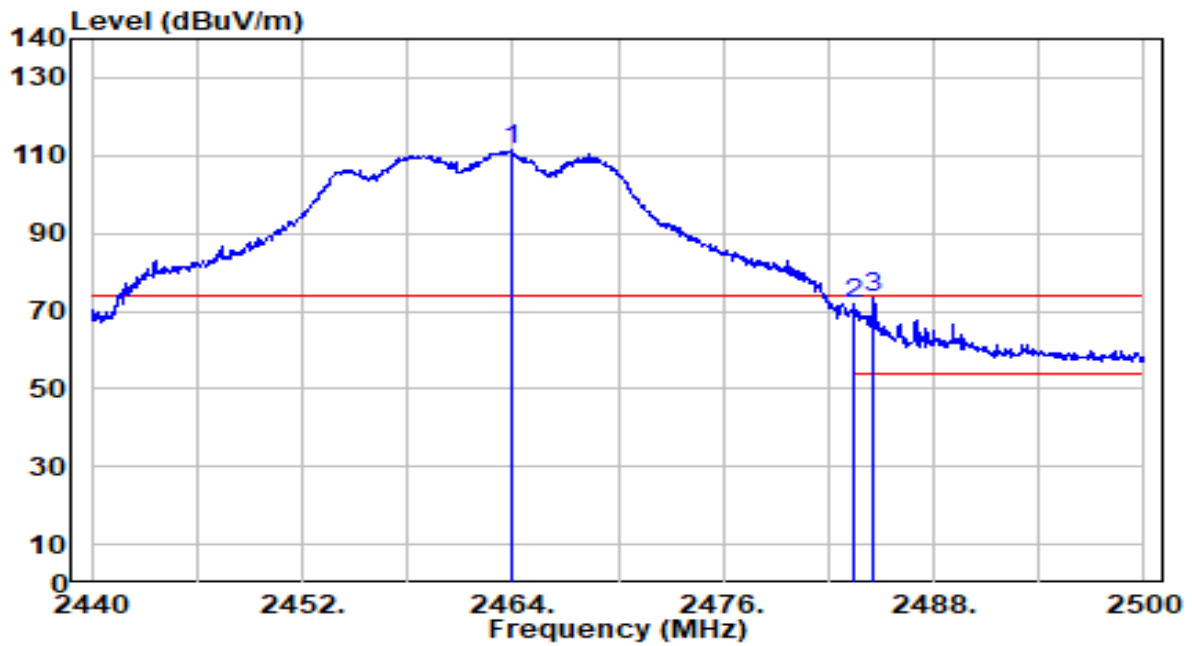


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.880	81.15	30.29	111.44	N/A	N/A	300	183	Peak
2	2483.500	41.34	30.32	71.66	-2.34	74.00	300	183	Peak
3	* 2484.580	43.14	30.32	73.46	-0.54	74.00	300	183	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

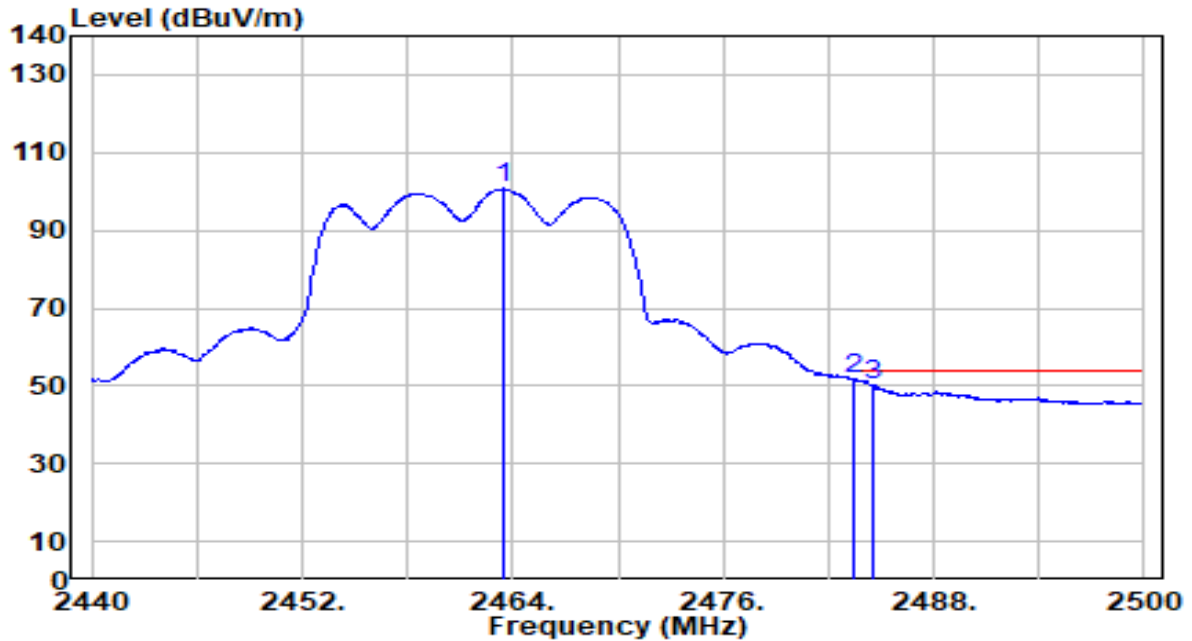


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.460	70.41	30.29	100.70	N/A	N/A	300	183	Average
2	* 2483.500	21.31	30.32	51.62	-2.38	54.00	300	183	Average
3	2484.520	19.86	30.32	50.18	-3.82	54.00	300	183	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

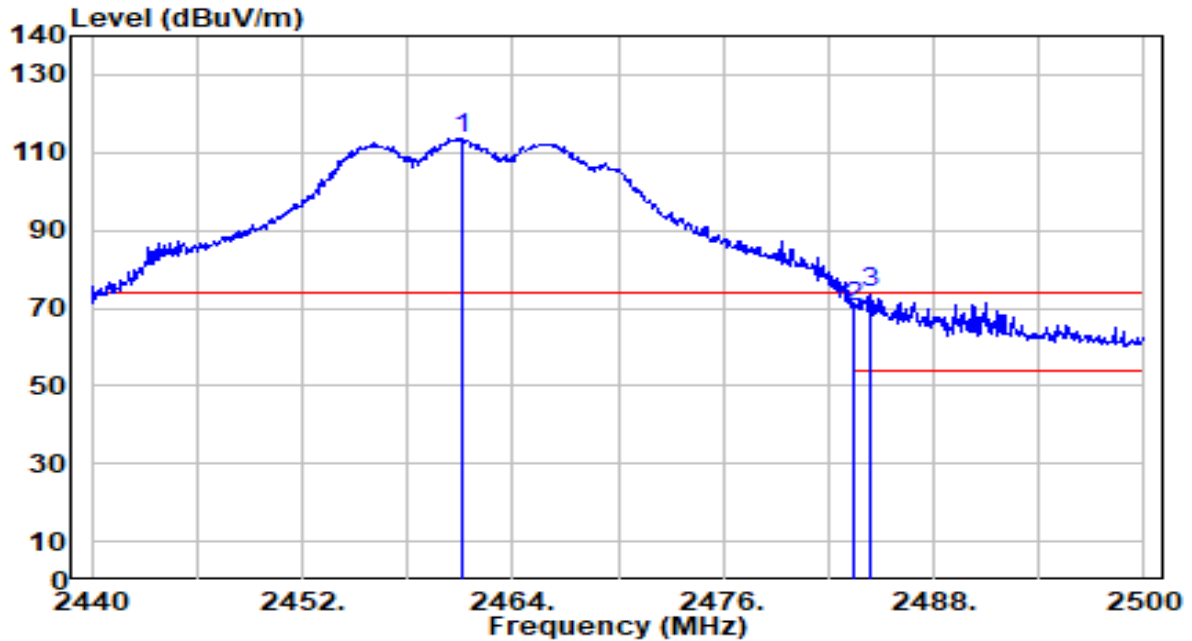


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	83.51	30.29	113.80	N/A	N/A	184	253	Peak
2	2483.500	39.82	30.32	70.14	-3.86	74.00	184	253	Peak
3	* 2484.460	43.53	30.32	73.85	-0.15	74.00	184	253	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

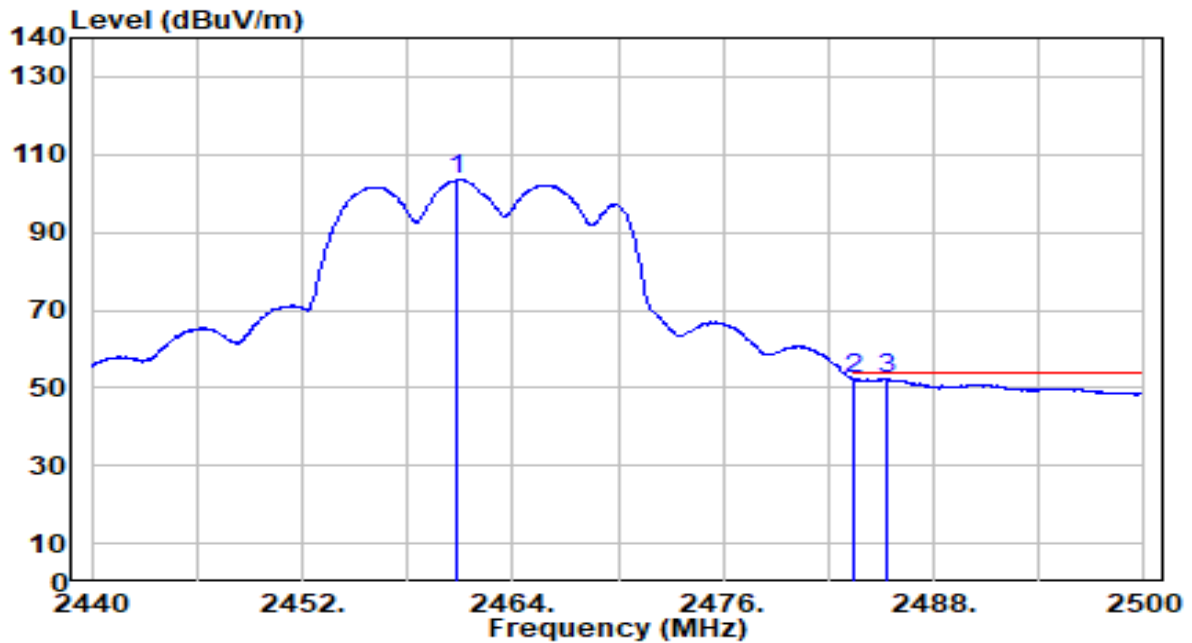


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	73.37	30.29	103.66	N/A	N/A	184	253	Average
2	2483.500	21.94	30.32	52.26	-1.74	54.00	184	253	Average
3	* 2485.360	21.94	30.32	52.26	-1.74	54.00	184	253	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

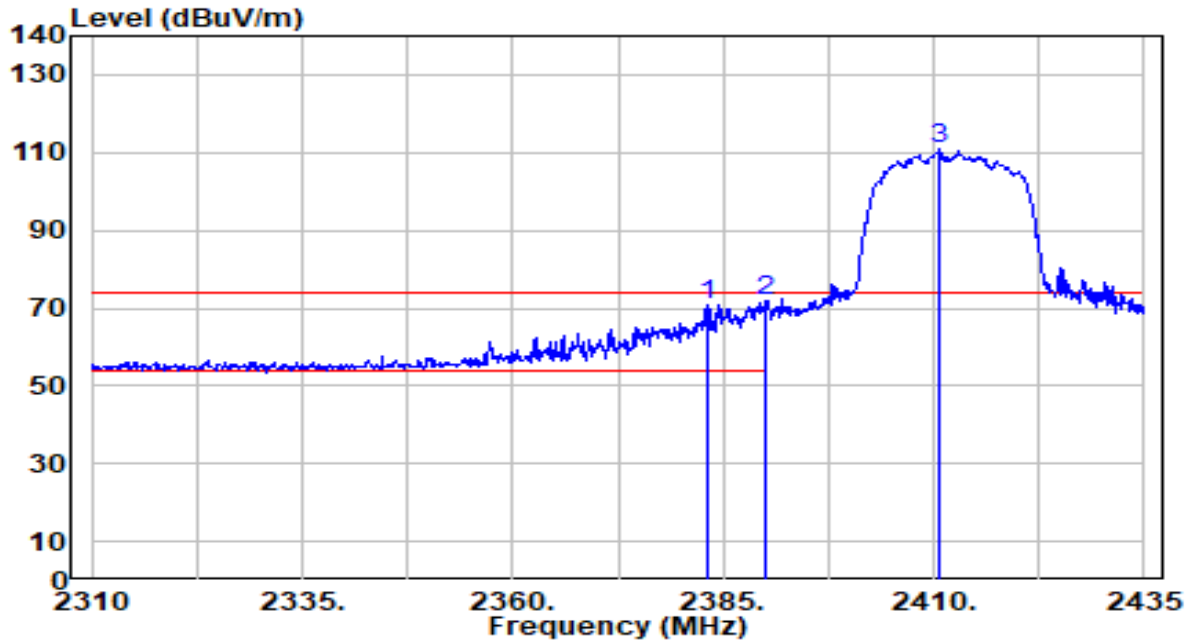


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.000	40.73	30.16	70.89	-3.11	74.00	200	214	Peak
2	* 2390.000	41.66	30.18	71.84	-2.16	74.00	200	214	Peak
3	2410.625	80.49	30.22	110.72	N/A	N/A	200	214	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

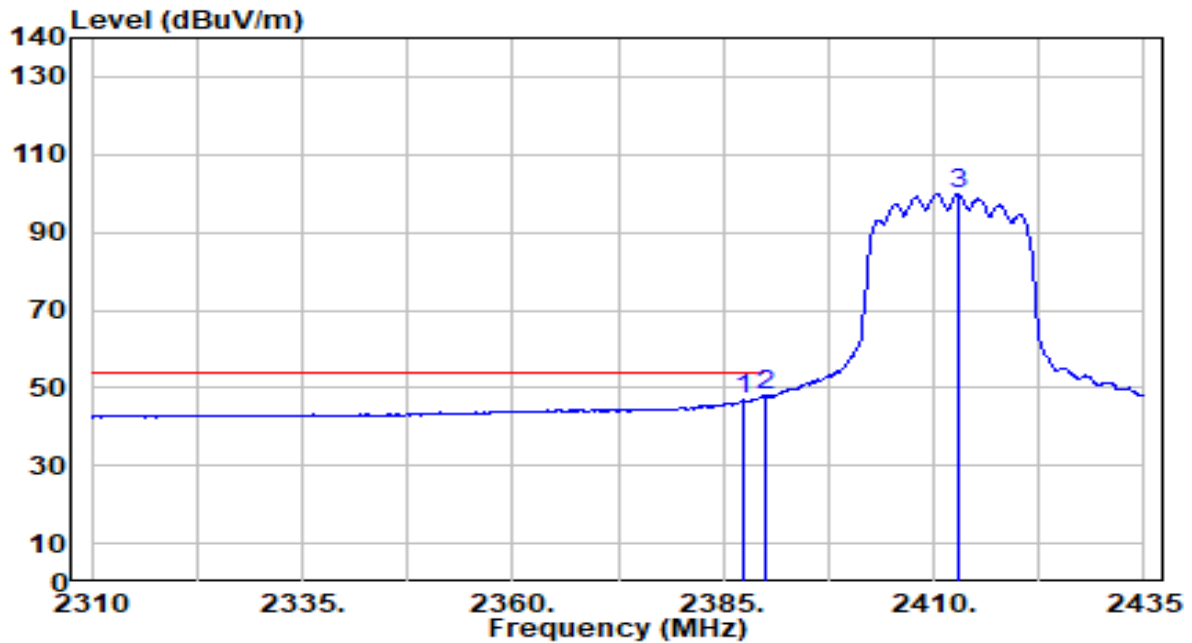


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.500	16.89	30.17	47.07	-6.93	54.00	200	214	Average
2	* 2390.000	17.93	30.18	48.11	-5.89	54.00	200	214	Average
3	2412.875	69.53	30.22	99.75	N/A	N/A	200	214	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

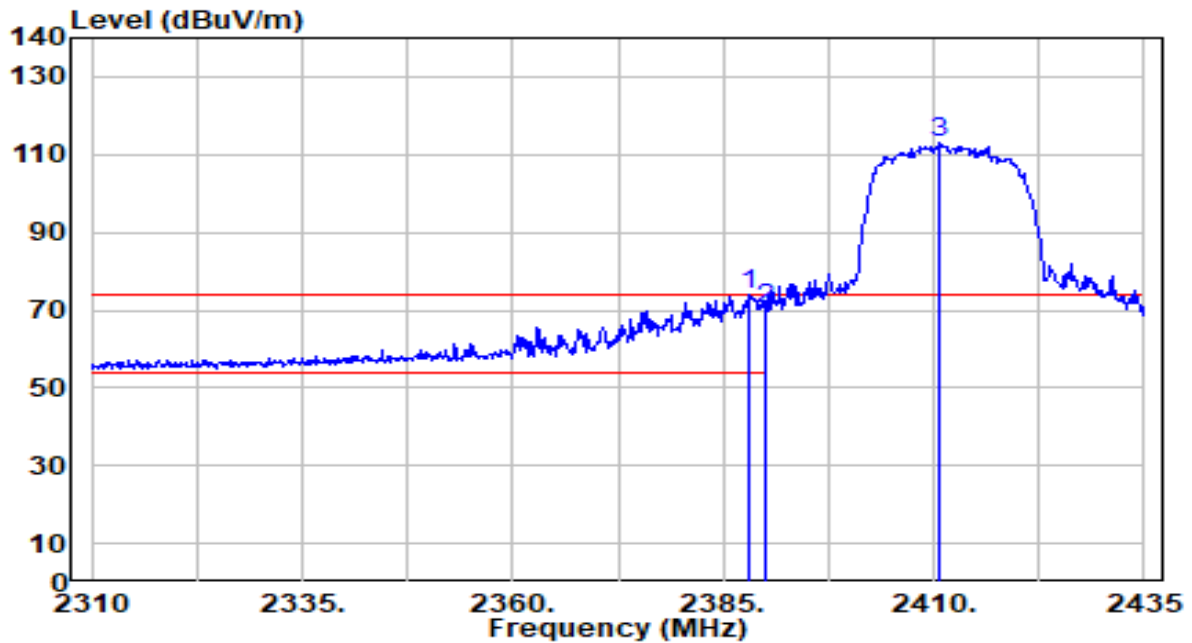


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.125	43.70	30.17	73.87	-0.13	74.00	250	249	Peak
2	2390.000	39.85	30.18	70.03	-3.97	74.00	250	249	Peak
3	2410.625	83.09	30.22	113.31	N/A	N/A	250	249	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1+2	Test Voltage	By Notebook PC

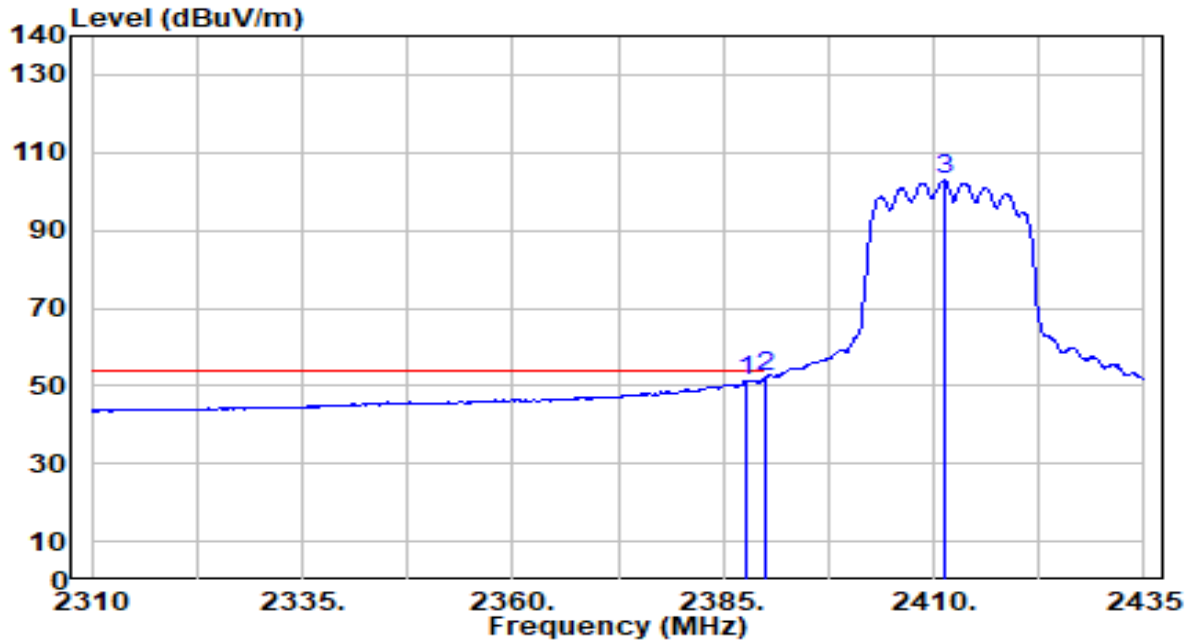


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	21.21	30.17	51.39	-2.61	54.00	250	249	Average
2	* 2390.000	21.97	30.18	52.15	-1.85	54.00	250	249	Average
3	2411.250	72.57	30.22	102.79	N/A	N/A	250	249	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

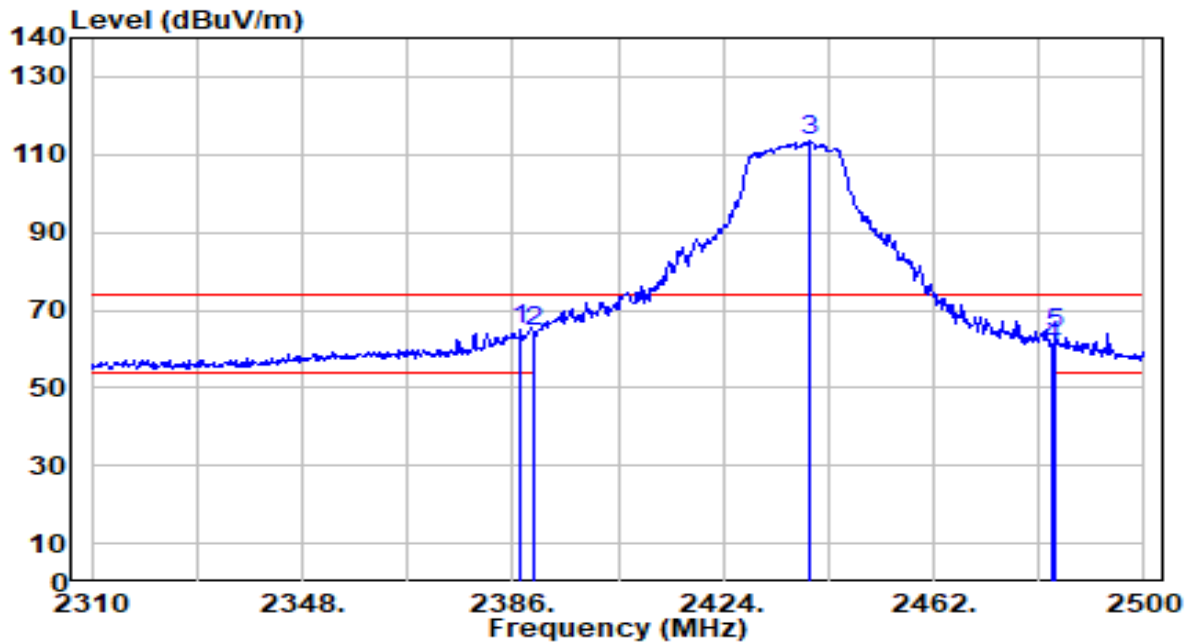


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.520	34.59	30.17	64.76	-9.24	74.00	205	182	Peak
2	2390.000	34.04	30.18	64.22	-9.78	74.00	205	182	Peak
3	2439.390	83.40	30.26	113.66	N/A	N/A	205	182	Peak
4	2483.500	30.37	30.32	60.68	-13.32	74.00	205	182	Peak
5	2484.040	33.56	30.32	63.88	-10.12	74.00	205	182	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

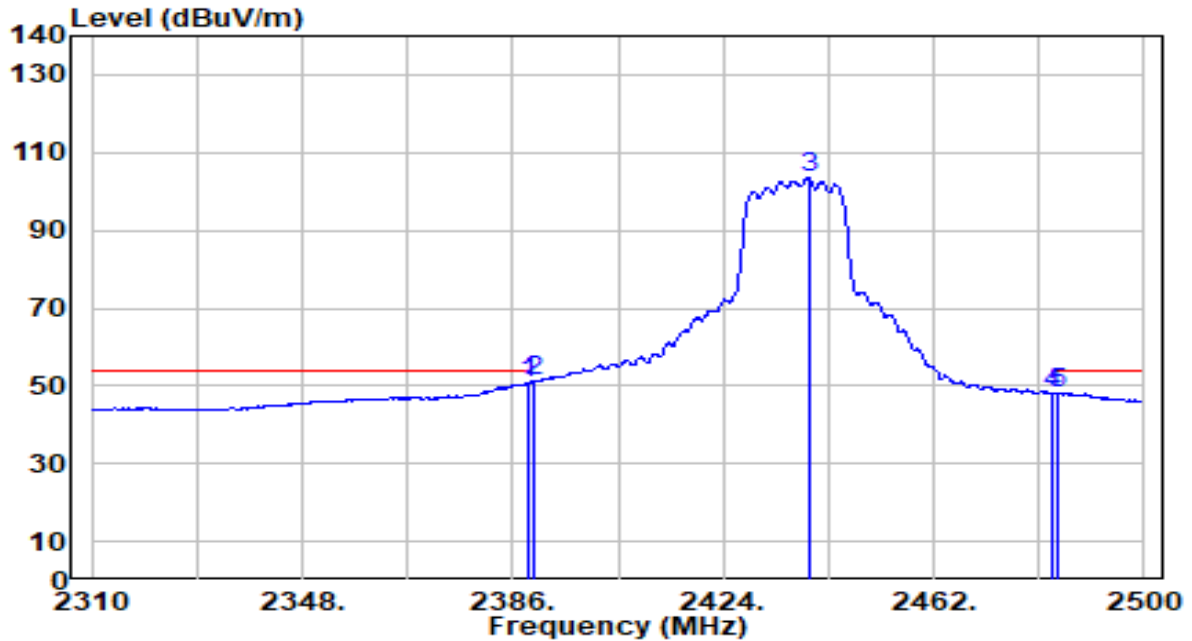


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	20.68	30.18	50.86	-3.14	54.00	205	182	Average
2	* 2390.000	21.04	30.18	51.22	-2.78	54.00	205	182	Average
3	2439.390	73.17	30.26	103.43	N/A	N/A	205	182	Average
4	2483.500	17.96	30.32	48.28	-5.72	54.00	205	182	Average
5	2484.420	17.82	30.32	48.14	-5.86	54.00	205	182	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

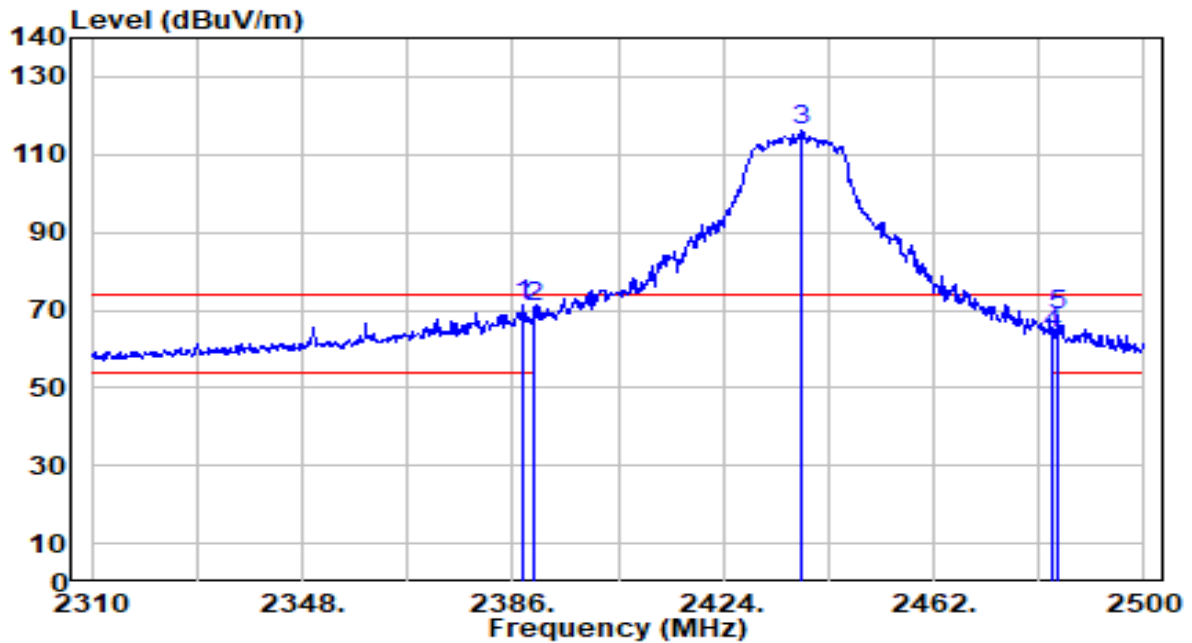


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.900	41.16	30.17	71.34	-2.66	74.00	192	249	Peak
2	2390.000	40.43	30.18	70.61	-3.39	74.00	192	249	Peak
3	2438.060	85.90	30.26	116.16	N/A	N/A	192	249	Peak
4	2483.500	33.74	30.32	64.05	-9.95	74.00	192	249	Peak
5	2484.610	38.53	30.32	68.85	-5.15	74.00	192	249	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

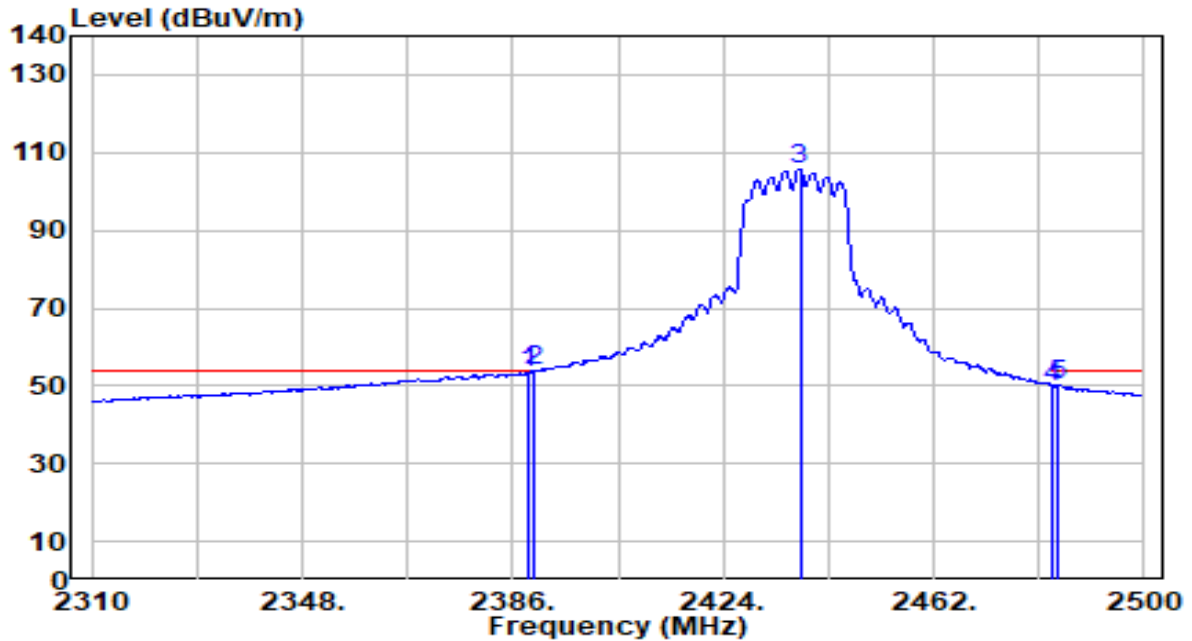


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	23.36	30.18	53.53	-0.47	54.00	192	249	Average
2	* 2390.000	23.66	30.18	53.84	-0.16	54.00	192	249	Average
3	2437.870	75.39	30.26	105.65	N/A	N/A	192	249	Average
4	2483.500	19.57	30.32	49.89	-4.11	54.00	192	249	Average
5	2484.420	19.96	30.32	50.28	-3.72	54.00	192	249	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

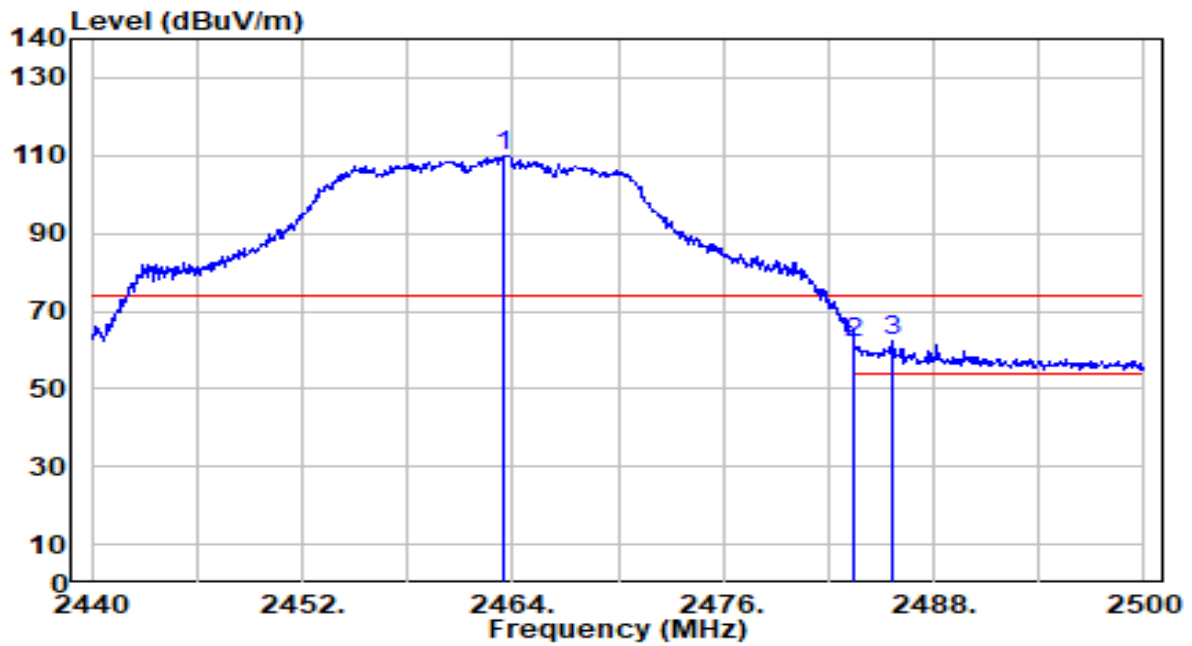


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.460	79.62	30.29	109.91	N/A	N/A	300	183	Peak
2	2483.500	31.25	30.32	61.57	-12.43	74.00	300	183	Peak
3	* 2485.660	32.07	30.32	62.39	-11.61	74.00	300	183	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

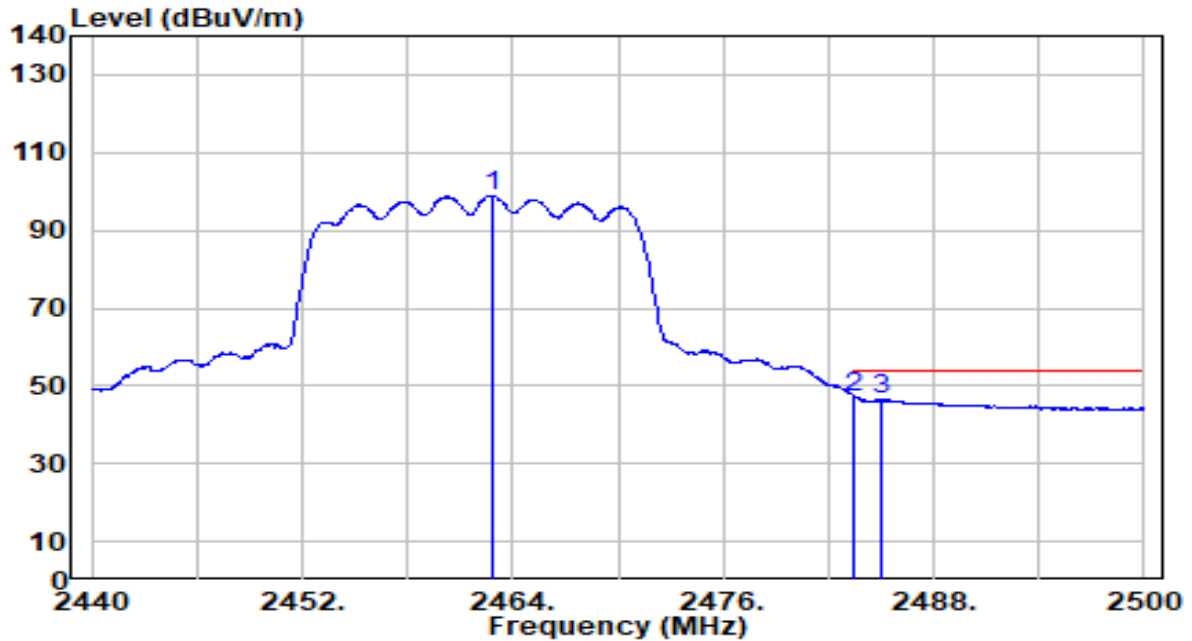


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.800	68.71	30.29	99.00	N/A	N/A	300	183	Average
2	* 2483.500	16.94	30.32	47.26	-6.74	54.00	300	183	Average
3	2485.000	16.09	30.32	46.41	-7.59	54.00	300	183	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

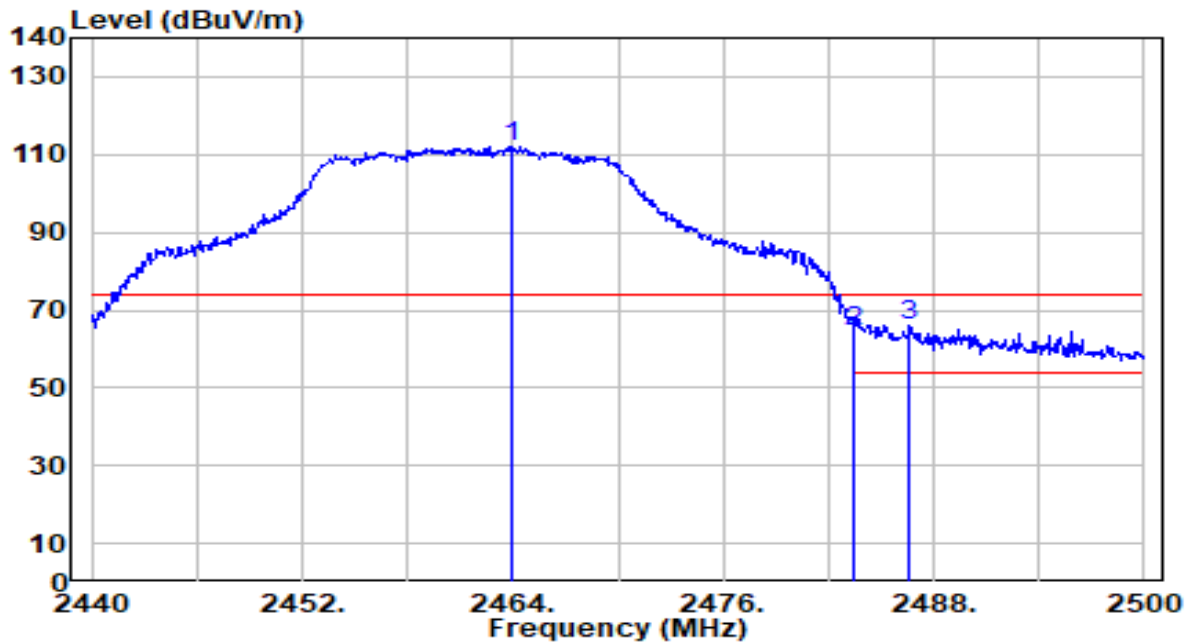


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.940	81.61	30.29	111.90	N/A	N/A	184	253	Peak
2	2483.500	34.38	30.32	64.70	-9.30	74.00	184	253	Peak
3	* 2486.620	35.80	30.32	66.13	-7.87	74.00	184	253	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1+2	Test Voltage	By Notebook PC

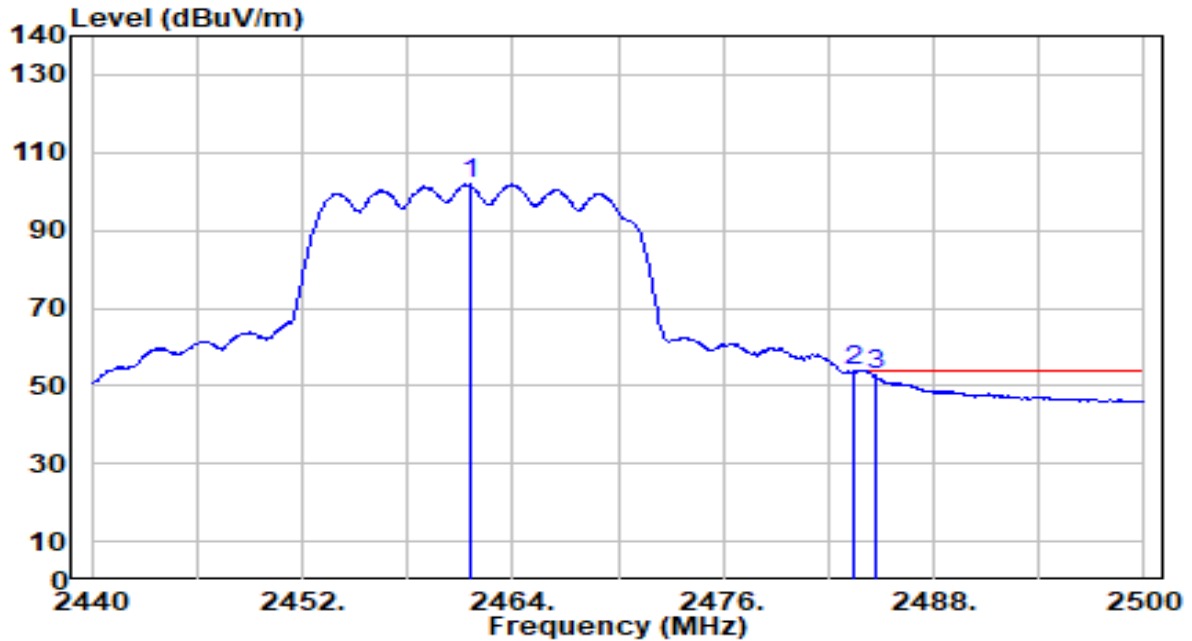


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.540	71.47	30.29	101.75	N/A	N/A	184	253	Average
2	* 2483.500	23.51	30.32	53.82	-0.18	54.00	184	253	Average
3	2484.640	22.25	30.32	52.57	-1.43	54.00	184	253	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2	Test Voltage	By Notebook PC

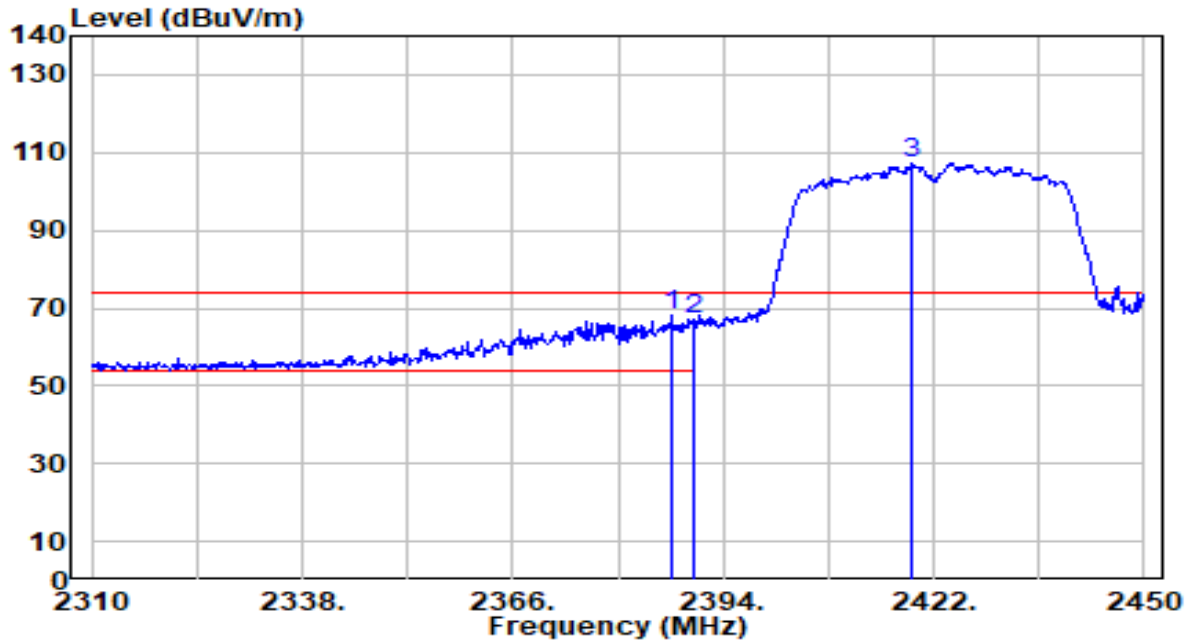


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.140	38.18	30.17	68.36	-5.64	74.00	181	214	Peak
2	2390.000	36.74	30.18	66.92	-7.08	74.00	181	214	Peak
3	2419.060	77.05	30.23	107.28	N/A	N/A	181	214	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2	Test Voltage	By Notebook PC

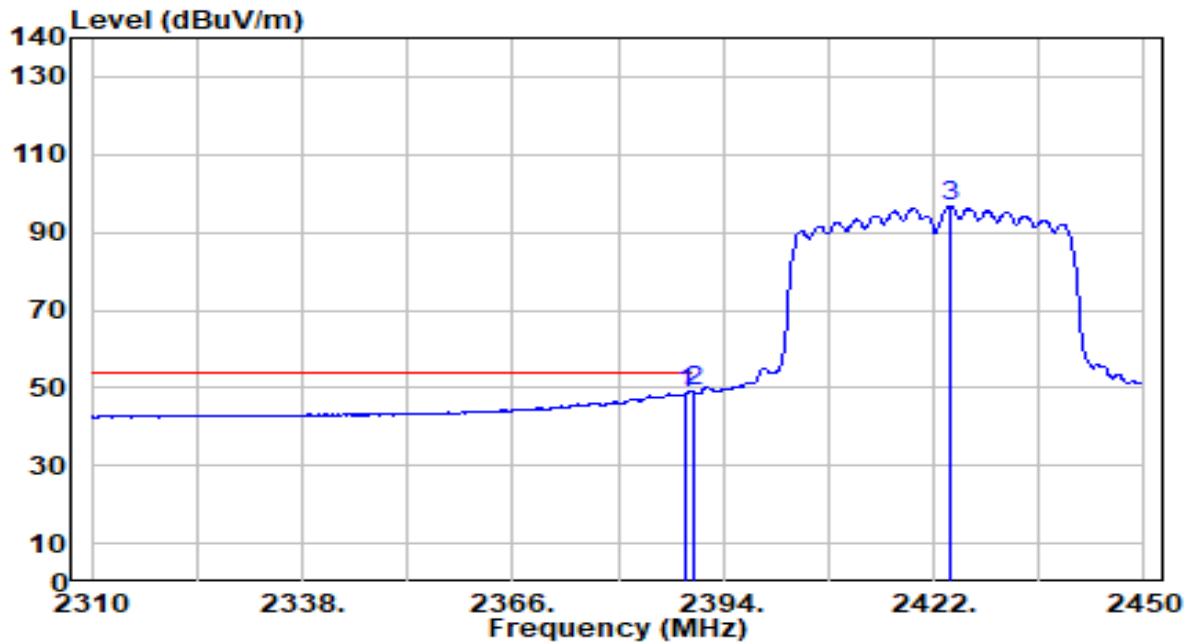


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	18.34	30.18	48.51	-5.49	54.00	181	214	Average
2	* 2390.000	18.86	30.18	49.04	-4.96	54.00	181	214	Average
3	2424.240	66.60	30.24	96.84	N/A	N/A	181	214	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2	Test Voltage	By Notebook PC

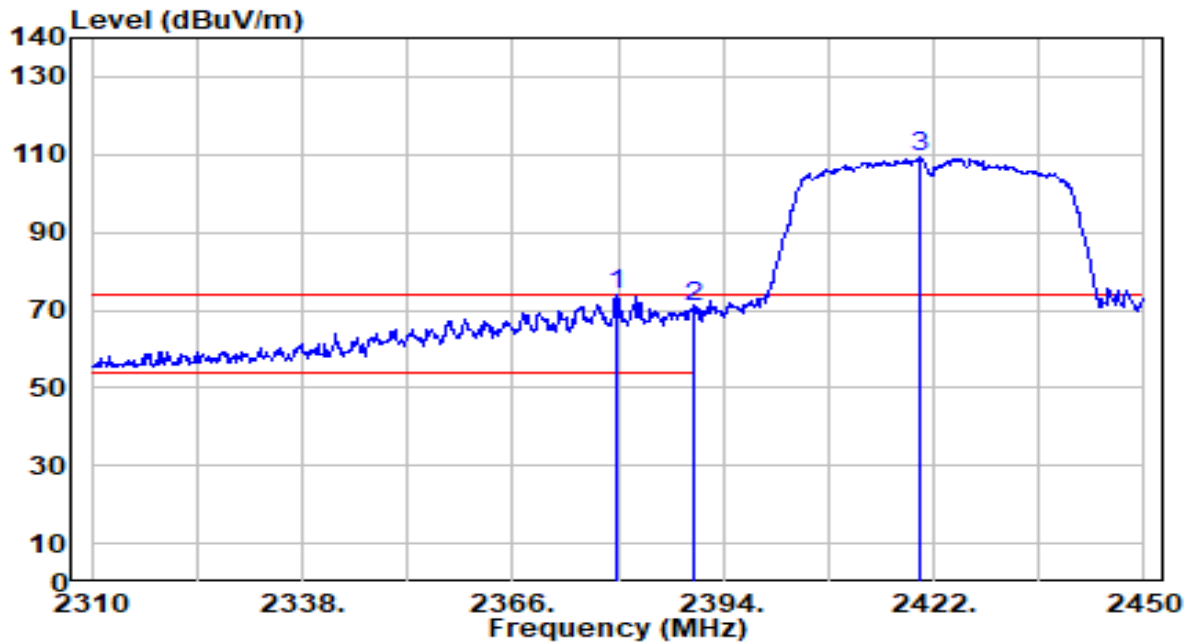


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2379.720	43.70	30.15	73.85	-0.15	74.00	180	248	Peak
2	2390.000	40.43	30.18	70.61	-3.39	74.00	180	248	Peak
3	2420.320	78.89	30.23	109.12	N/A	N/A	180	248	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 1+2	Test Voltage	By Notebook PC

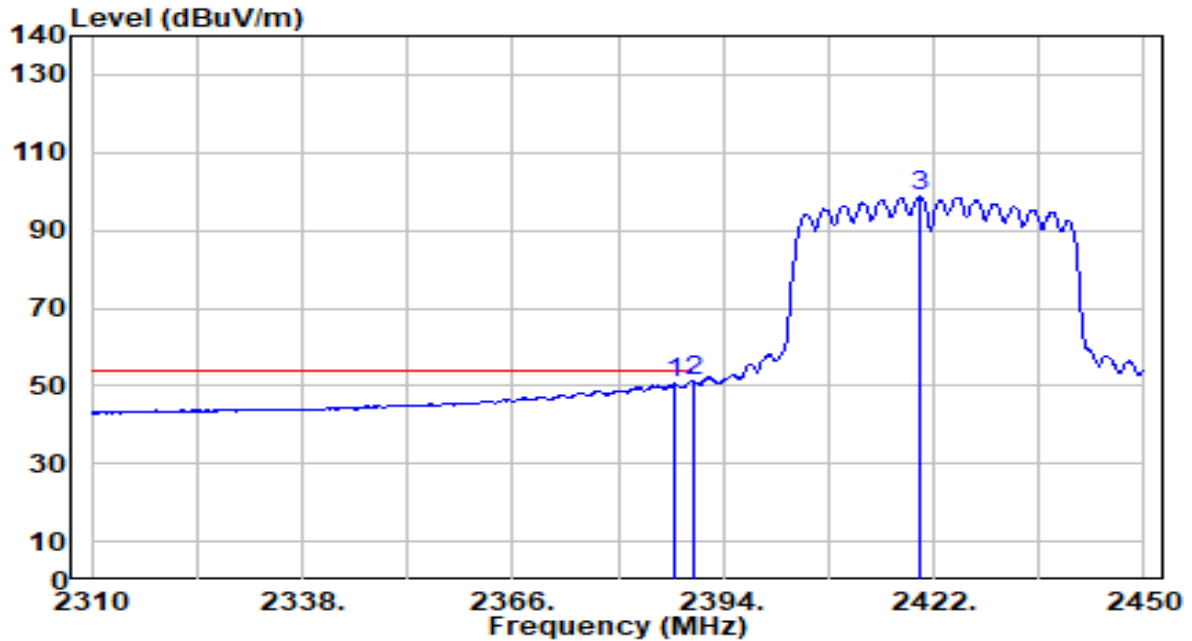


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.420	20.34	30.17	50.51	-3.49	54.00	180	248	Average
2	* 2390.000	21.06	30.18	51.24	-2.76	54.00	180	248	Average
3	2420.040	68.39	30.23	98.62	N/A	N/A	180	248	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE3000 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-10-27
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 1+2	Test Voltage	By Notebook PC

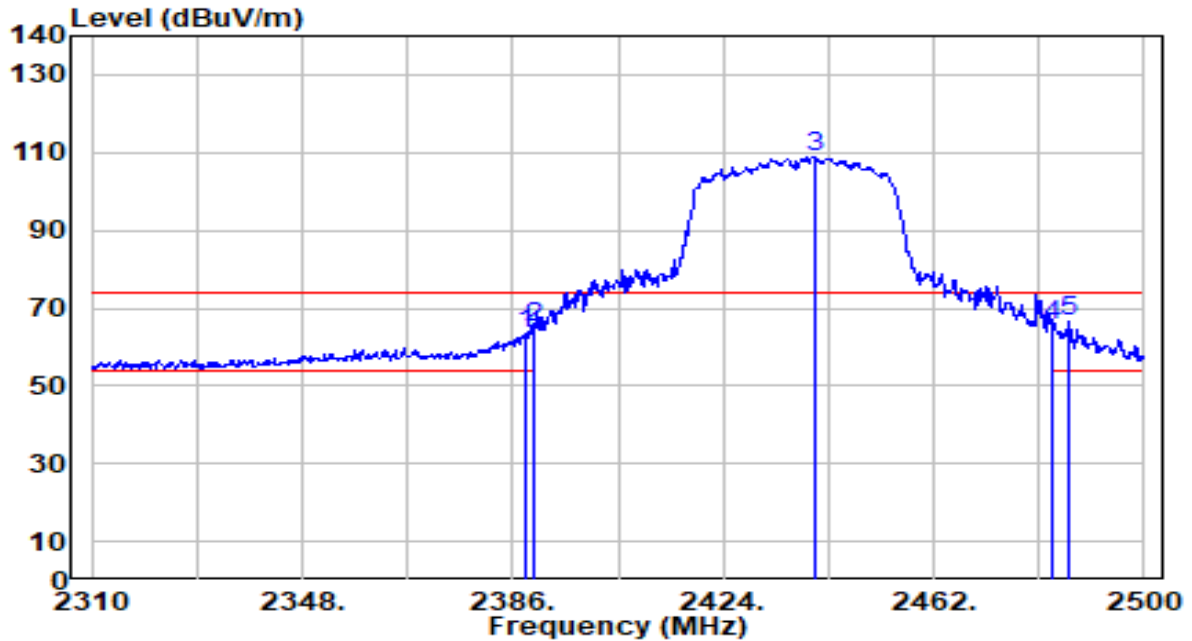

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	33.20	30.18	63.37	-10.63	74.00	205	182	Peak
2	2390.000	34.87	30.18	65.05	-8.95	74.00	205	182	Peak
3	2440.530	78.67	30.26	108.93	N/A	N/A	205	182	Peak
4	2483.500	35.17	30.32	65.49	-8.51	74.00	205	182	Peak
5	* 2486.320	36.20	30.32	66.52	-7.48	74.00	205	182	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.