


EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band5_CH 3_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

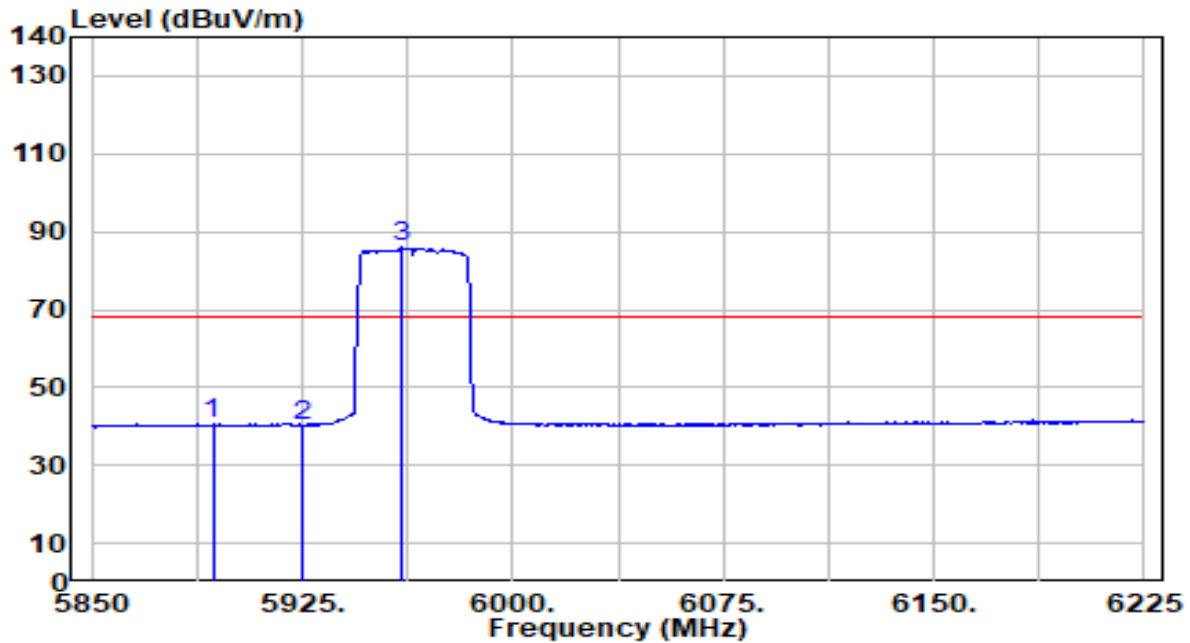


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5893.125	40.07	0.61	40.67	-27.53	68.20	211	189	Average
2		5925.000	39.52	0.65	40.17	-28.03	68.20	211	189	Average
3		5960.250	85.16	0.69	85.85	N/A	N/A	211	189	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band5_CH 3_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

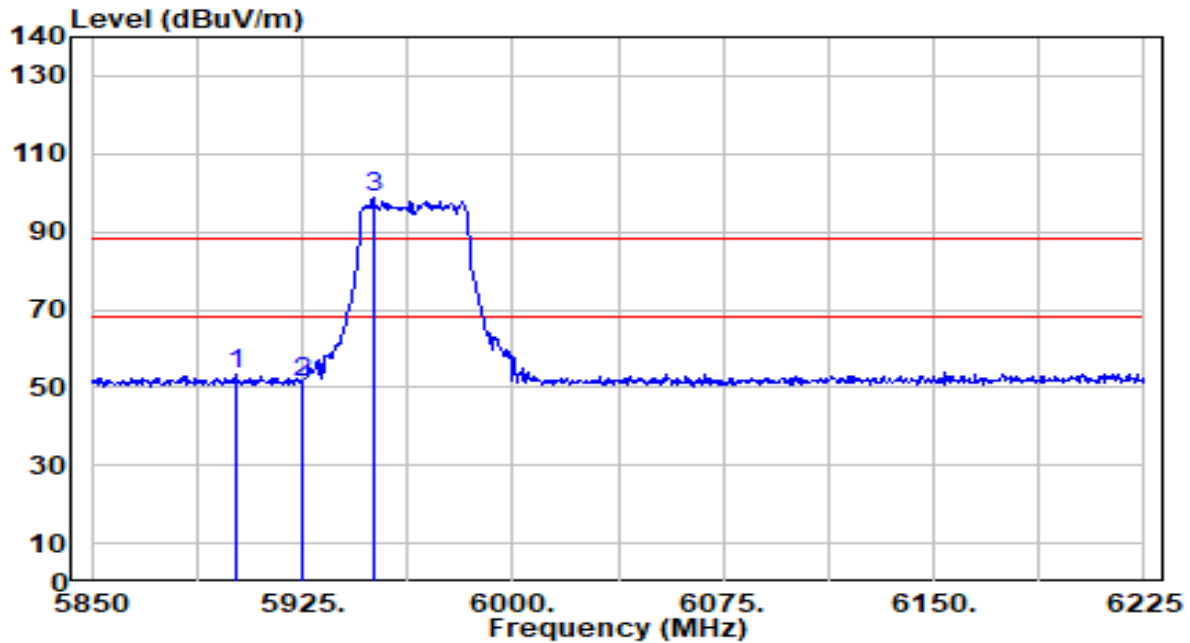


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5901.000	52.87	0.62	53.49	-34.71	88.20	236	142	Peak
2	5925.000	50.86	0.65	51.51	-36.69	88.20	236	142	Peak
3	5950.500	98.14	0.68	98.82	N/A	N/A	236	142	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band5_CH 3_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

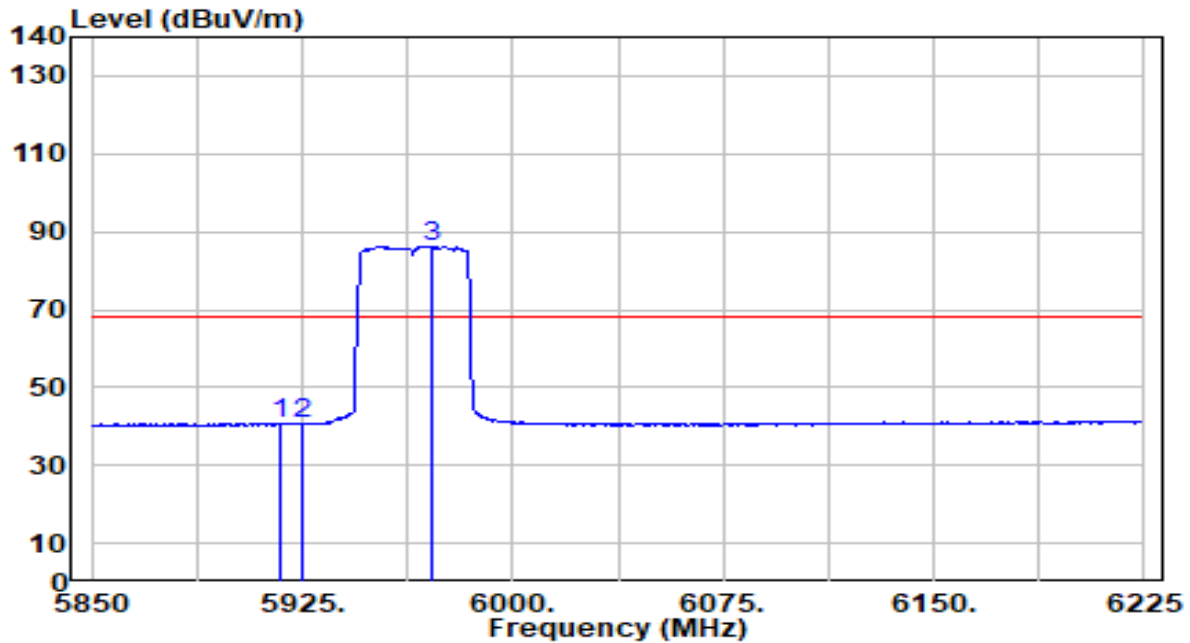


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5917.125	40.17	0.64	40.81	-27.39	68.20	236	142	Average
2		5925.000	39.90	0.65	40.55	-27.65	68.20	236	142	Average
3		5970.750	85.55	0.70	86.25	N/A	N/A	236	142	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band8_CH 227_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

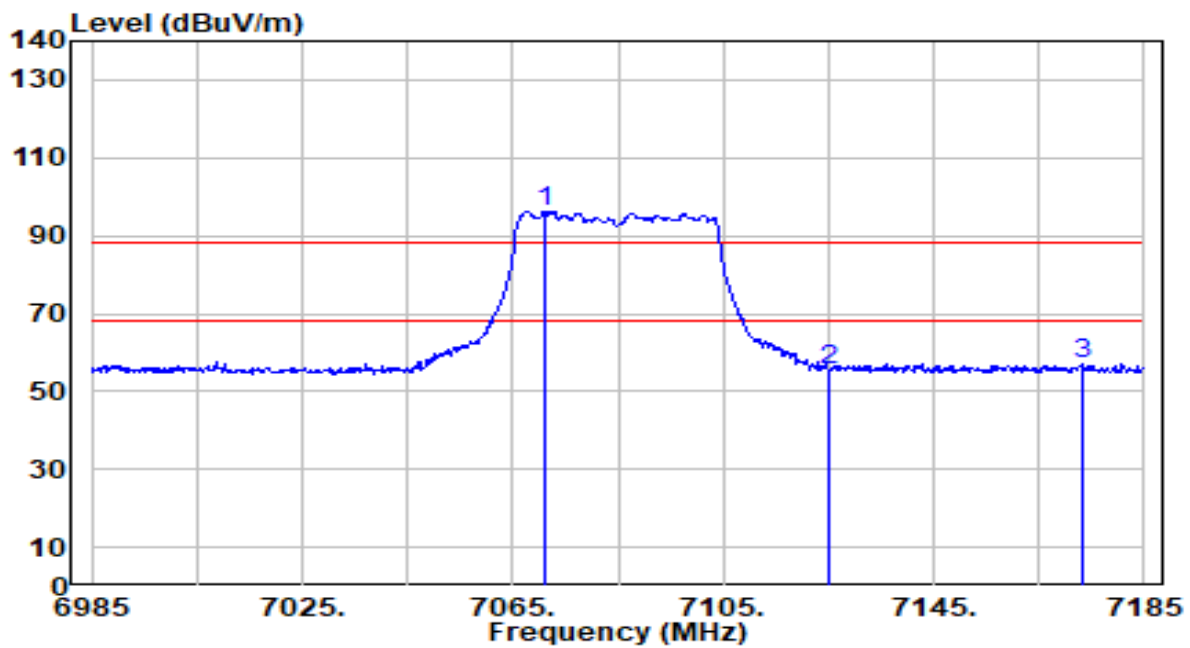


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7071.000	92.35	4.02	96.37	N/A	N/A	260	0	Peak
2	7125.000	51.27	4.08	55.35	-32.85	88.20	260	0	Peak
3	* 7173.200	52.84	4.14	56.98	-31.22	88.20	260	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band8_CH 227_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

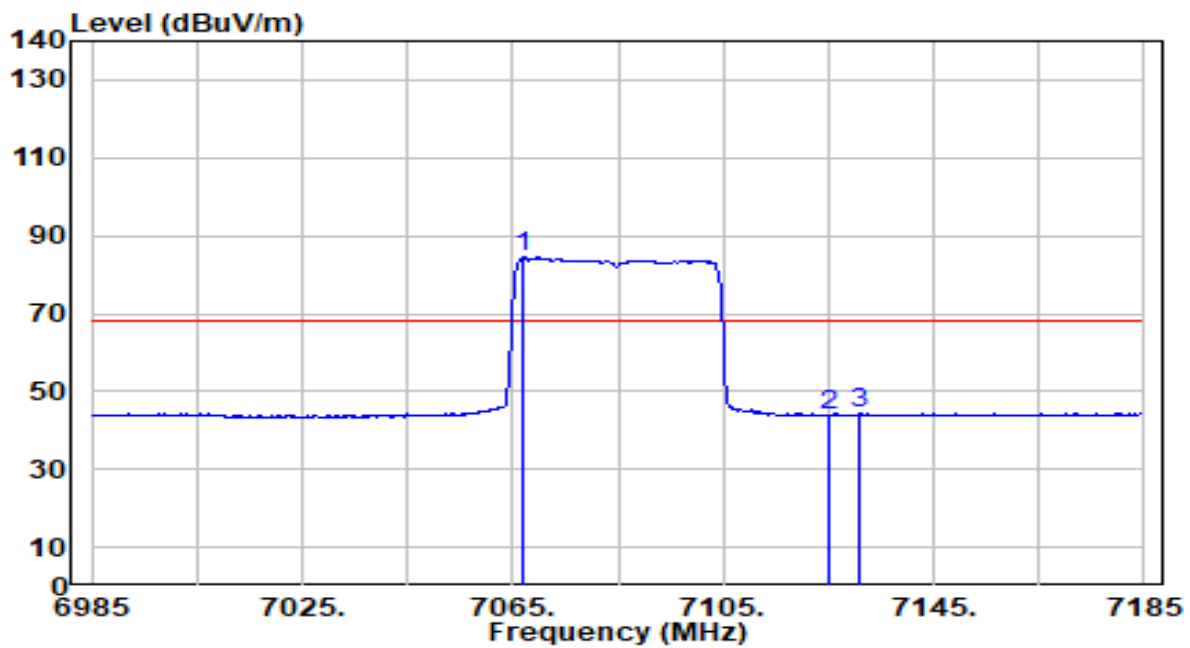


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7067.000	80.40	4.01	84.41	N/A	N/A	260	0	Average
2	7125.000	39.72	4.08	43.80	-24.40	68.20	260	0	Average
3	* 7130.800	40.34	4.09	44.42	-23.78	68.20	260	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band8_CH 227_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

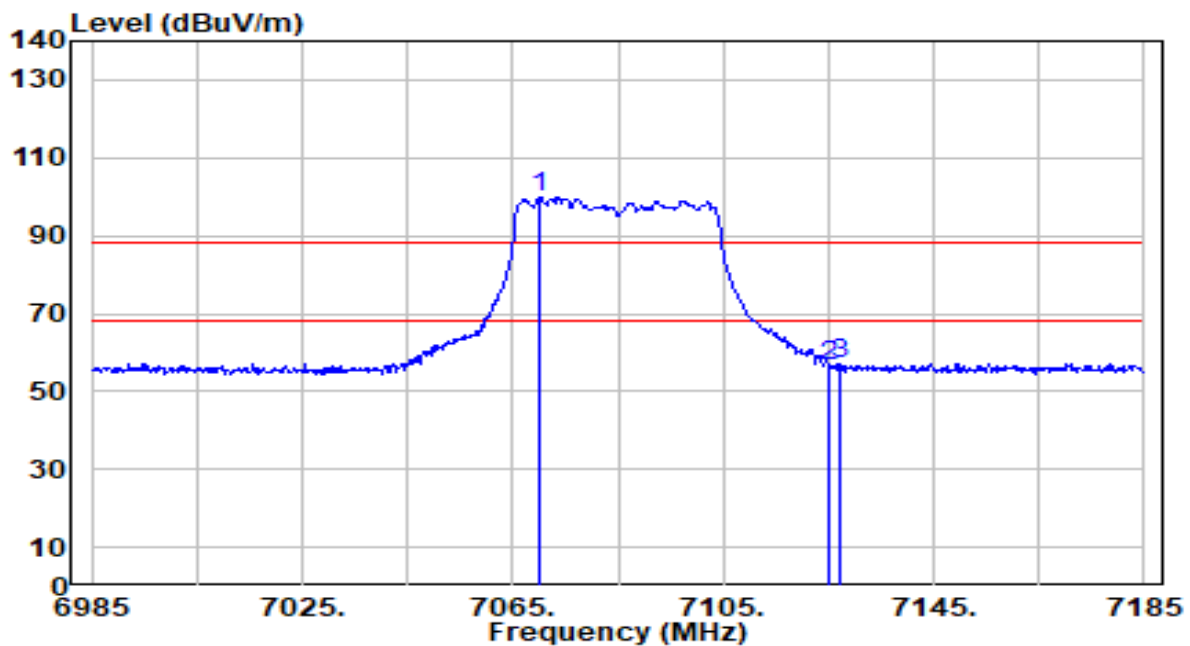


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7070.200	95.84	4.01	99.85	N/A	N/A	194	100	Peak
2	7125.000	52.26	4.08	56.34	-31.86	88.20	194	100	Peak
3	* 7127.400	52.98	4.08	57.07	-31.13	88.20	194	100	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band8_CH 227_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

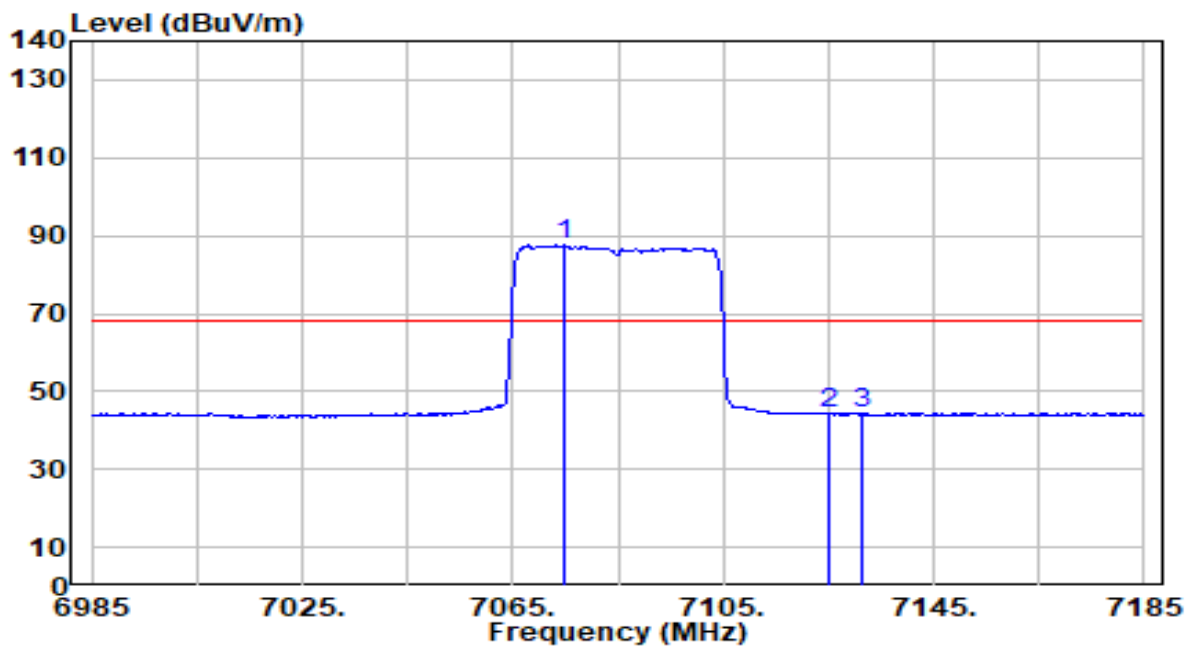


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7075.000	83.46	4.02	87.48	N/A	N/A	194	100	Average
2	7125.000	40.17	4.08	44.25	-23.95	68.20	194	100	Average
3	* 7131.200	40.36	4.09	44.45	-23.75	68.20	194	100	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band5_CH 7_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

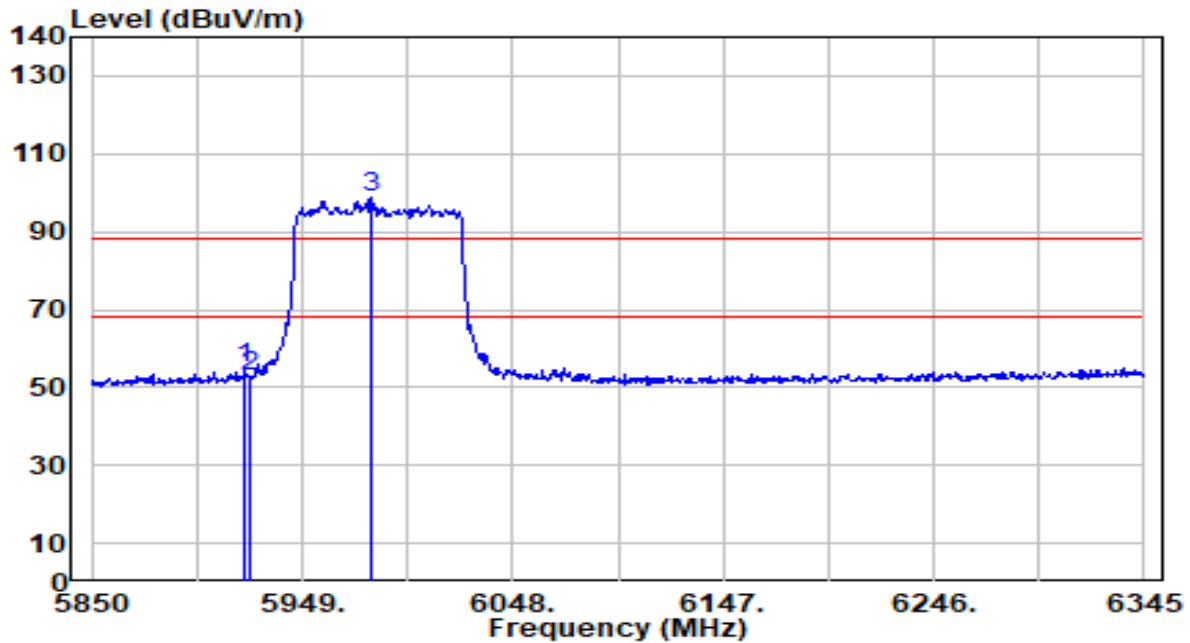


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5921.775	54.11	0.64	54.75	-33.45	88.20	206	180	Peak
2	5925.000	51.98	0.65	52.63	-35.57	88.20	206	180	Peak
3	5981.175	98.04	0.72	98.76	N/A	N/A	206	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band5_CH 7_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

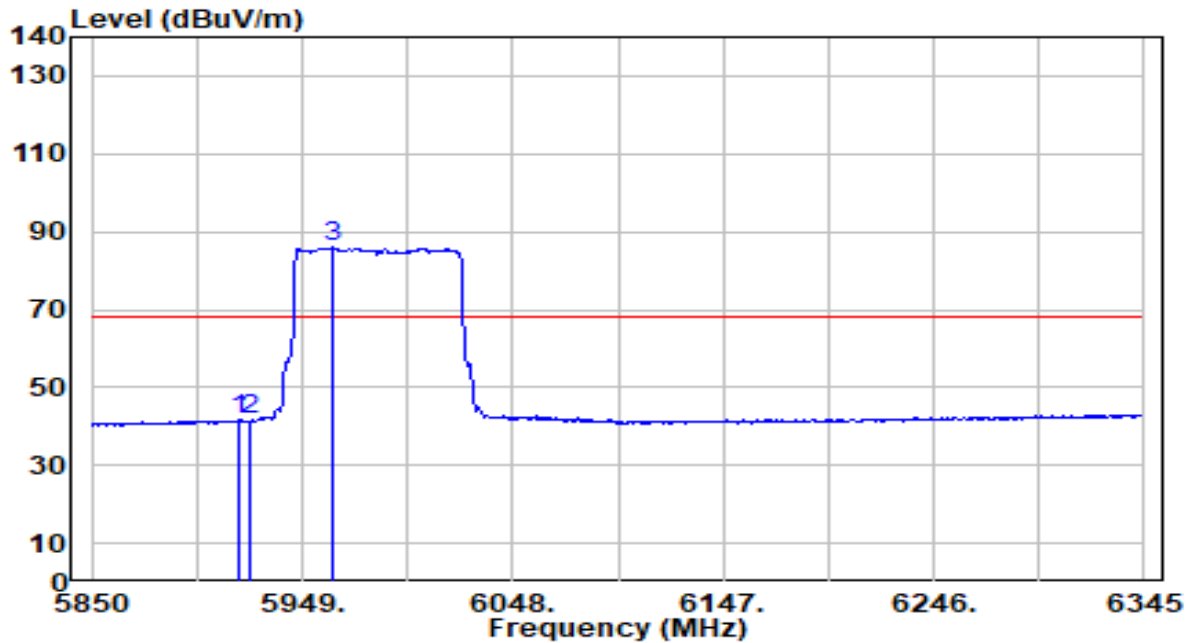


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5919.795	40.89	0.64	41.53	-26.67	68.20	206	180	Average
2	* 5925.000	40.93	0.65	41.57	-26.63	68.20	206	180	Average
3	5963.850	85.26	0.69	85.96	N/A	N/A	206	180	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band5_CH 7_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

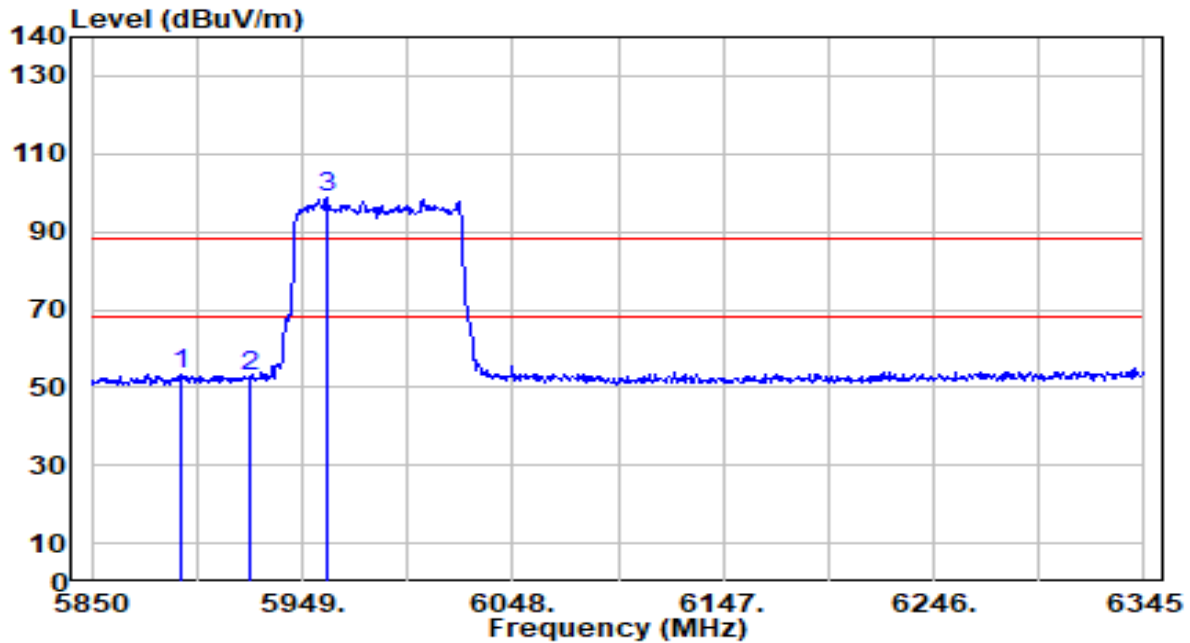


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5892.075	52.58	0.60	53.18	-35.02	88.20	256	144	Peak
2	5925.000	52.30	0.65	52.95	-35.25	88.20	256	144	Peak
3	5960.385	97.92	0.69	98.61	N/A	N/A	256	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band5_CH 7_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

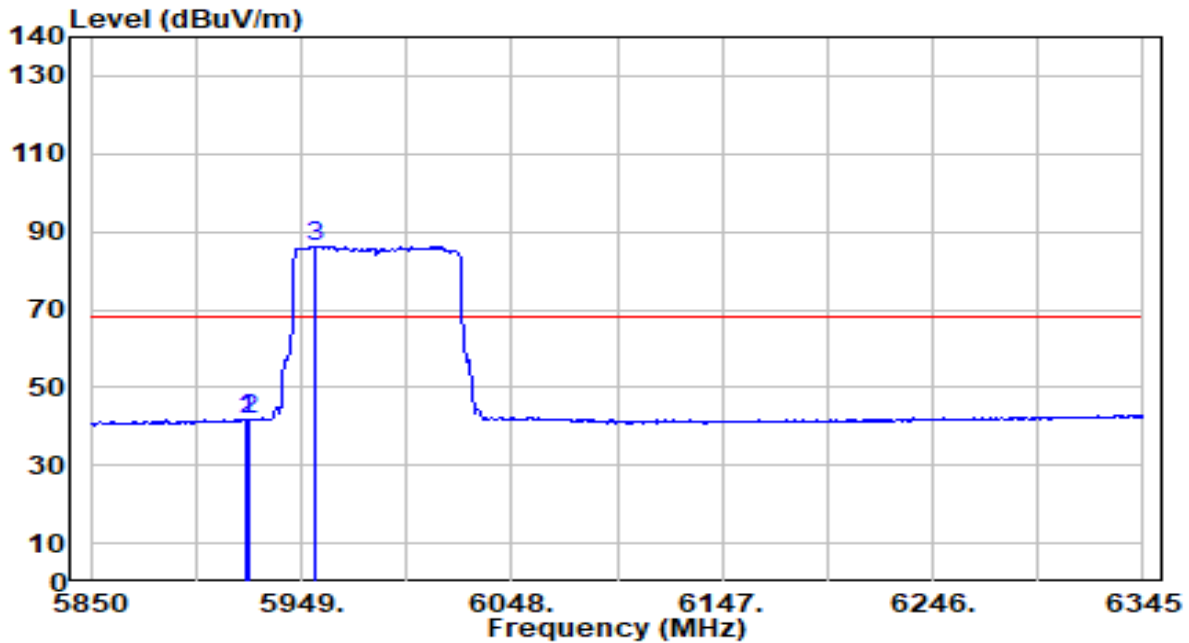


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5922.765	41.27	0.64	41.91	-26.29	68.20	256	144	Average
2		5925.000	40.98	0.65	41.62	-26.58	68.20	256	144	Average
3		5954.940	85.54	0.68	86.22	N/A	N/A	256	144	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

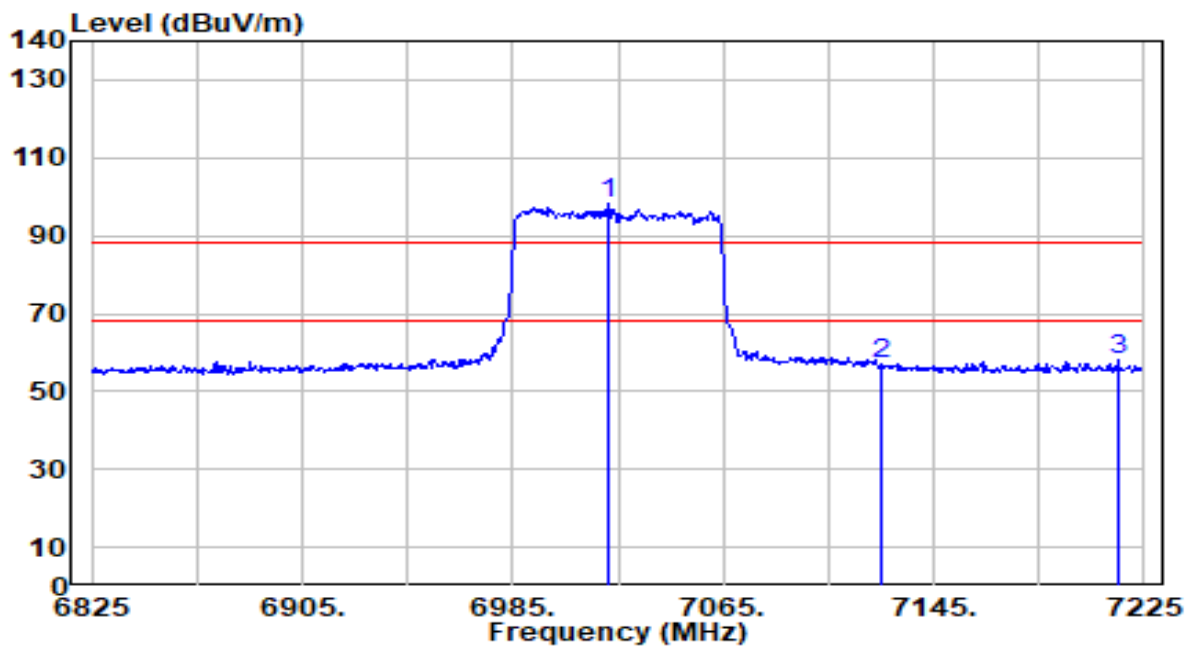


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7021.400	94.18	3.96	98.14	N/A	N/A	229	0	Peak
2	7125.000	52.87	4.08	56.95	-31.25	88.20	229	0	Peak
3	* 7215.000	53.71	4.17	57.87	-30.33	88.20	229	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

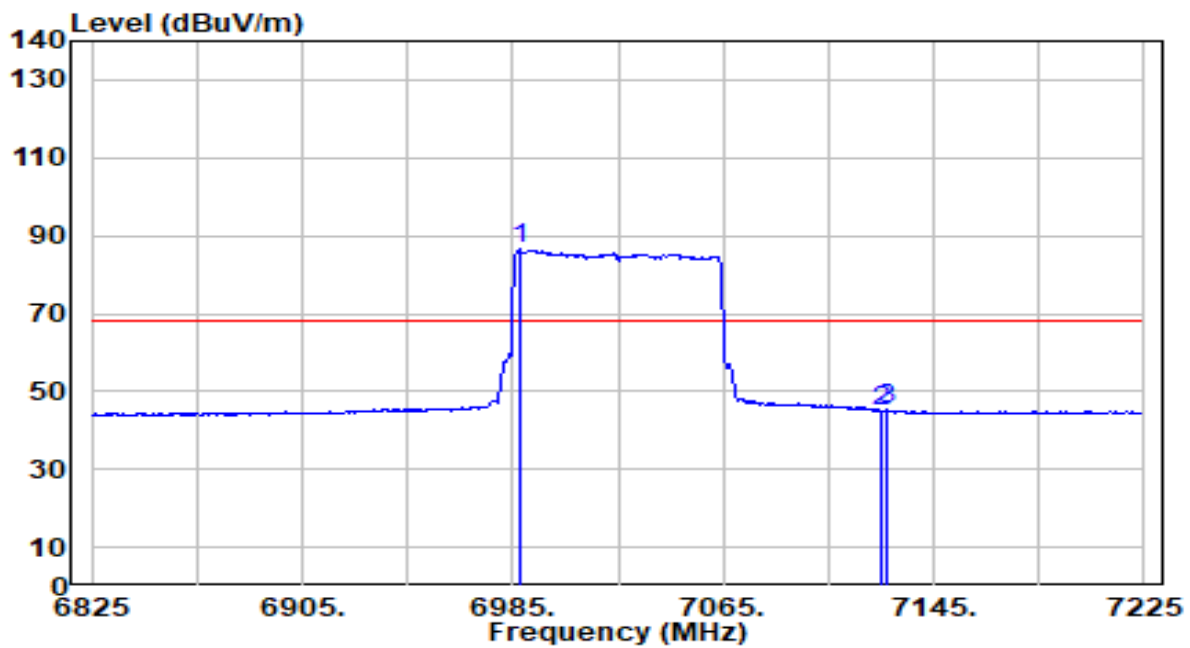


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6987.400	82.57	3.94	86.51	N/A	N/A	229	0	Average
2	7125.000	40.85	4.08	44.93	-23.27	68.20	229	0	Average
3	* 7127.400	41.16	4.08	45.25	-22.95	68.20	229	0	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

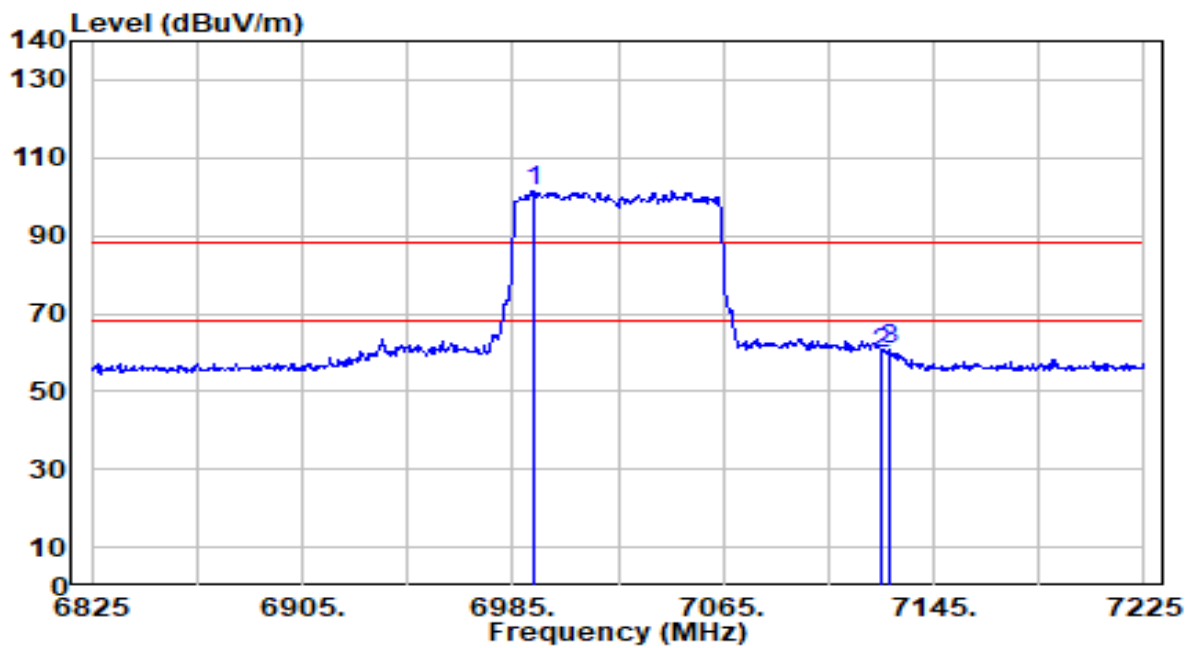


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6992.600	97.56	3.93	101.49	N/A	N/A	152	70	Peak
2	7125.000	55.63	4.08	59.71	-28.49	88.20	152	70	Peak
3	* 7127.800	56.60	4.08	60.68	-27.52	88.20	152	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

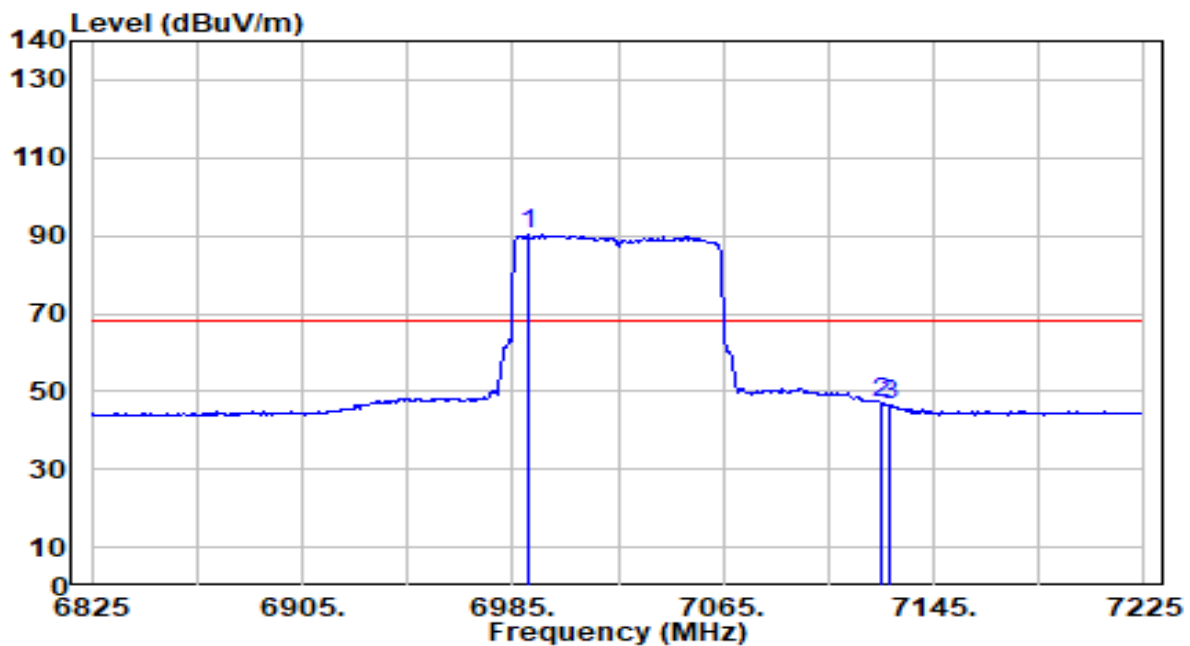


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6991.000	86.17	3.94	90.11	N/A	N/A	152	70	Average
2	* 7125.000	42.74	4.08	46.82	-21.38	68.20	152	70	Average
3	7128.200	42.54	4.08	46.62	-21.58	68.20	152	70	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band5_CH 15_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

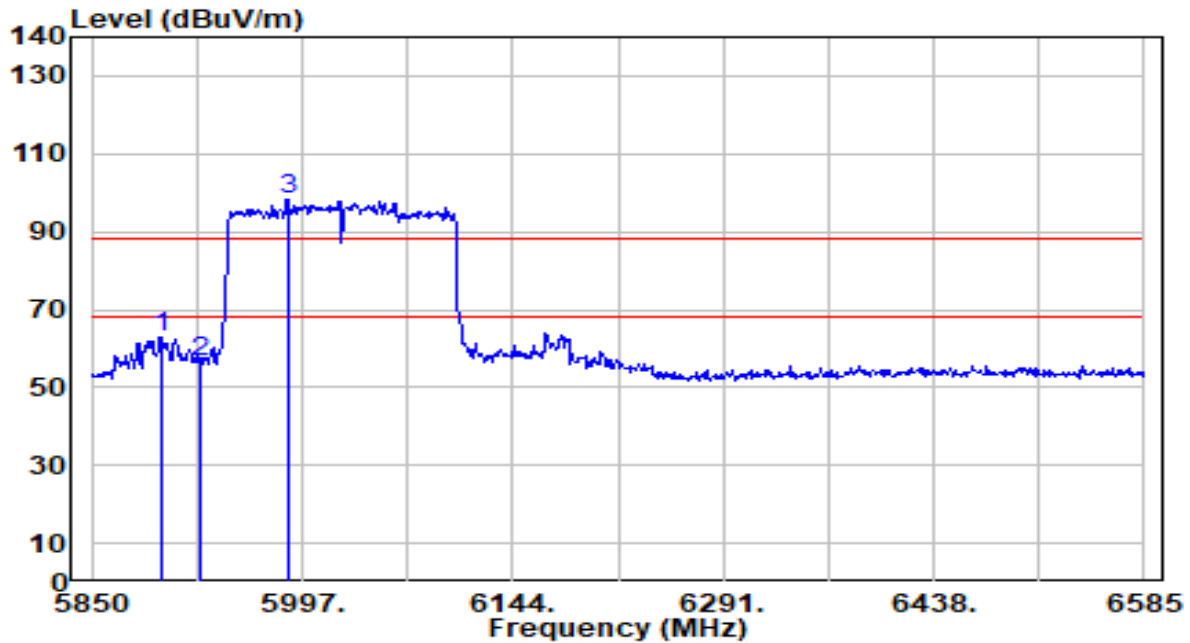


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5898.510	62.32	0.61	62.93	-25.27	88.20	219	180	Peak
2		5925.000	55.97	0.65	56.61	-31.59	88.20	219	180	Peak
3		5986.710	97.37	0.72	98.09	N/A	N/A	219	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band5_CH 15_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

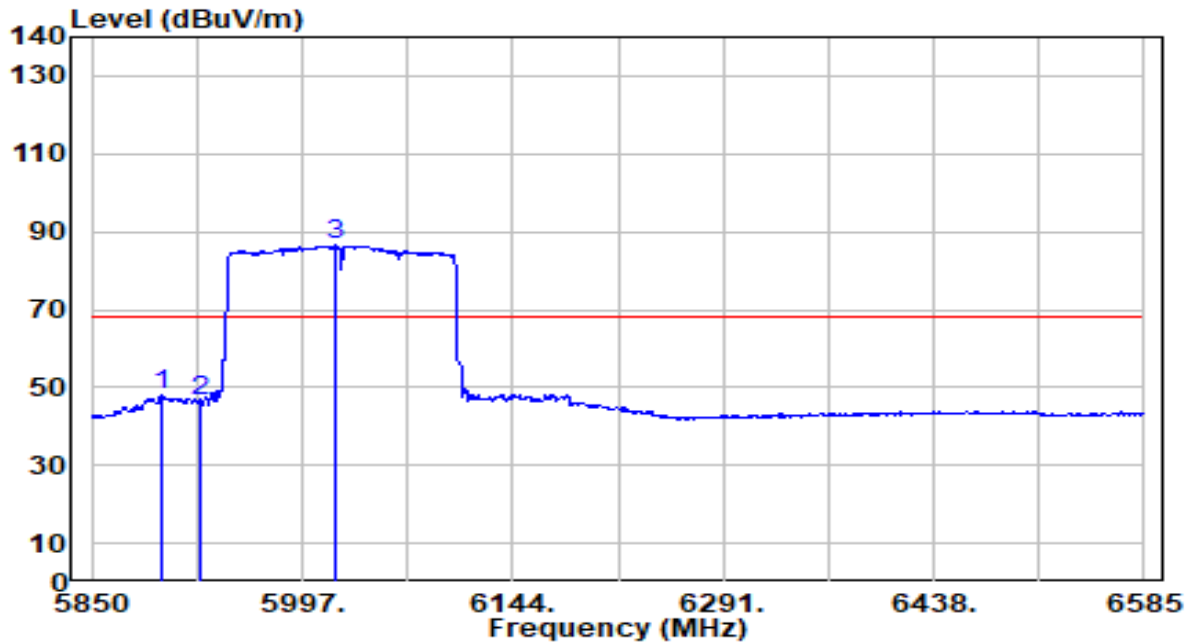


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5898.510	47.39	0.61	48.00	-20.20	68.20	219	180	Average
2		5925.000	45.97	0.65	46.61	-21.59	68.20	219	180	Average
3		6019.785	85.60	0.80	86.40	N/A	N/A	219	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band5_CH 15_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

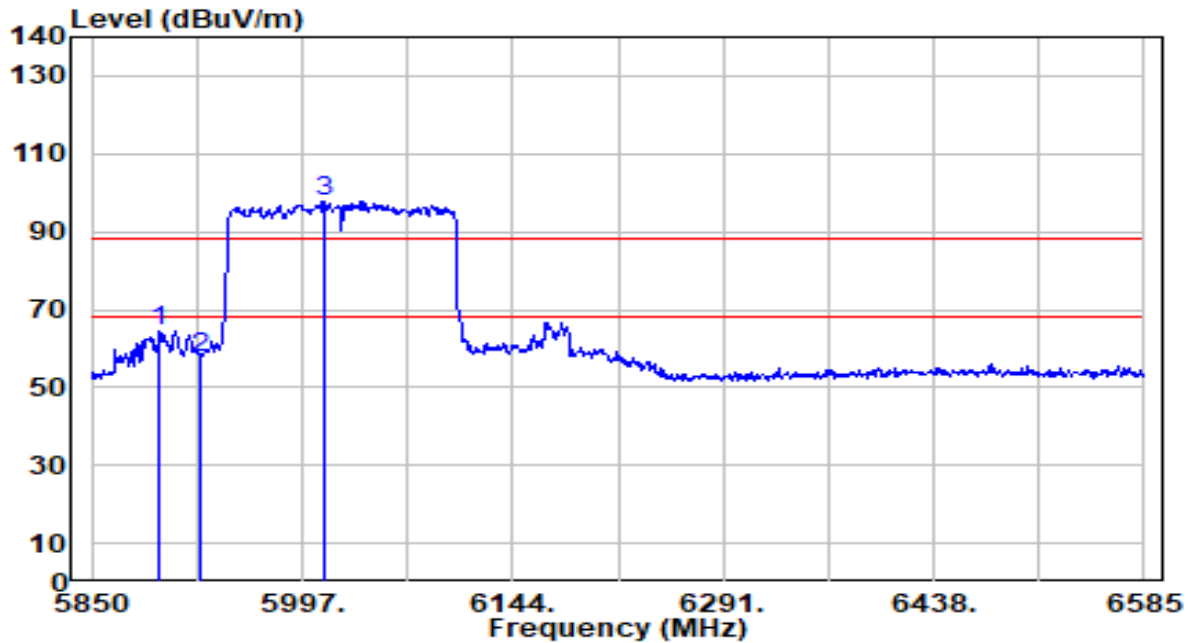


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5897.775	63.78	0.61	64.40	-23.80	88.20	225	137	Peak
2		5925.000	56.71	0.65	57.35	-30.85	88.20	225	137	Peak
3		6011.700	97.11	0.78	97.88	N/A	N/A	225	137	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band5_CH 15_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

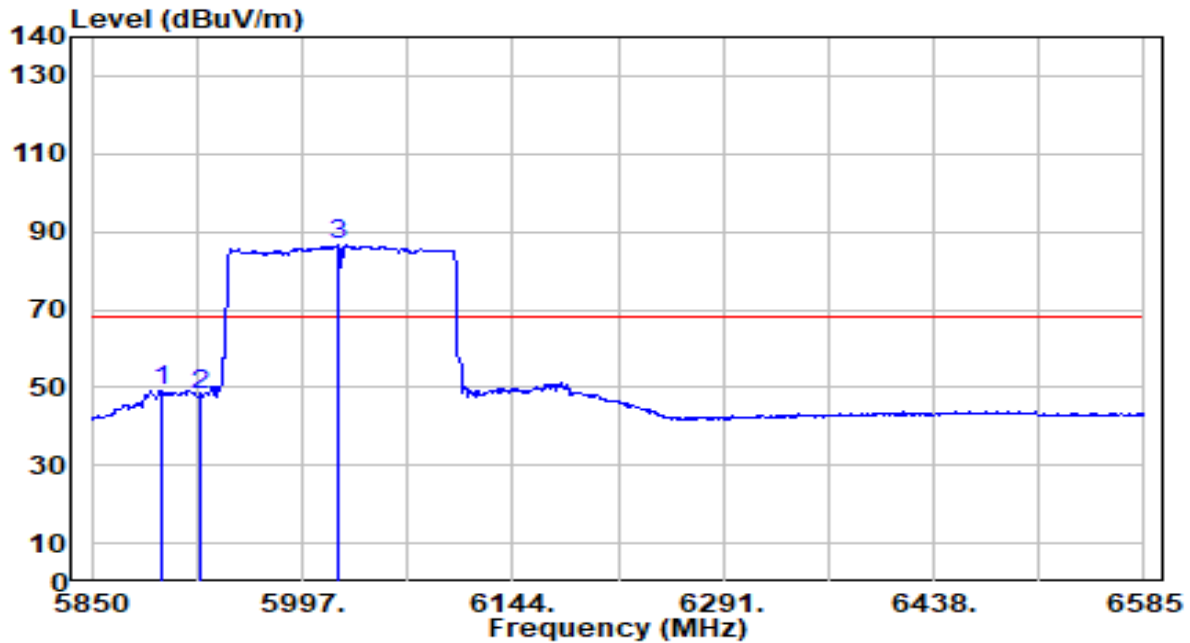


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5898.510	48.69	0.61	49.31	-18.89	68.20	225	137	Average
2	5925.000	47.29	0.65	47.93	-20.27	68.20	225	137	Average
3	6021.255	85.66	0.81	86.47	N/A	N/A	225	137	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

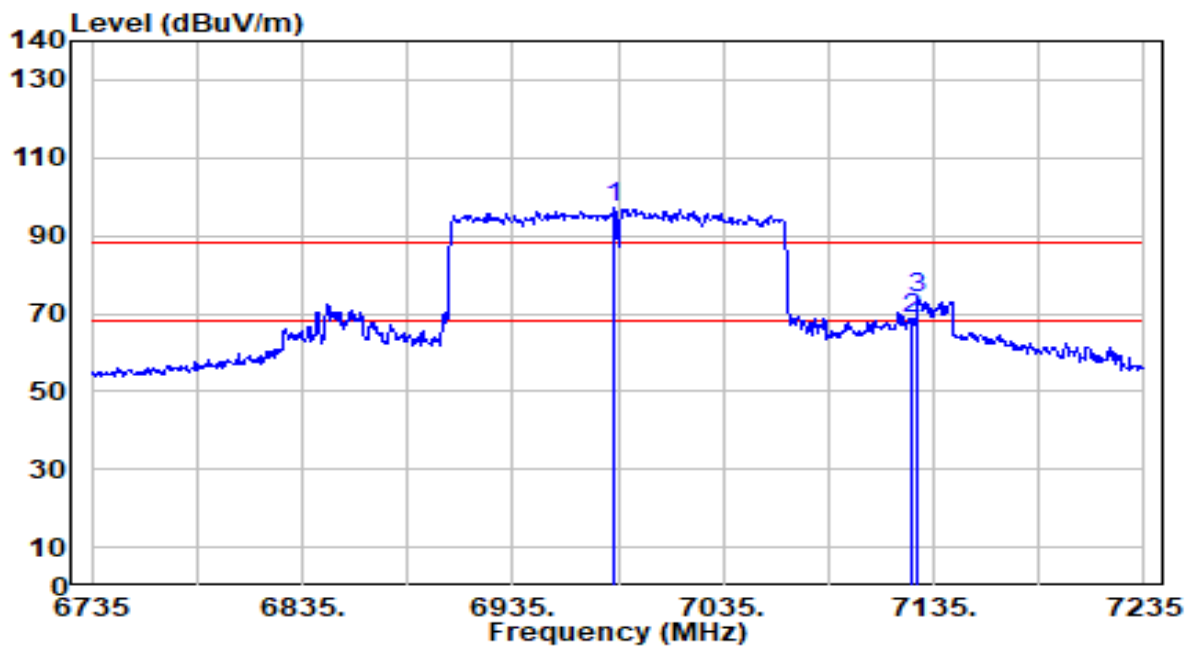


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6983.500	93.13	3.94	97.07	N/A	N/A	250	2	Peak
2	7125.000	64.35	4.08	68.43	-19.77	88.20	250	2	Peak
3	* 7127.500	70.05	4.08	74.14	-14.06	88.20	250	2	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

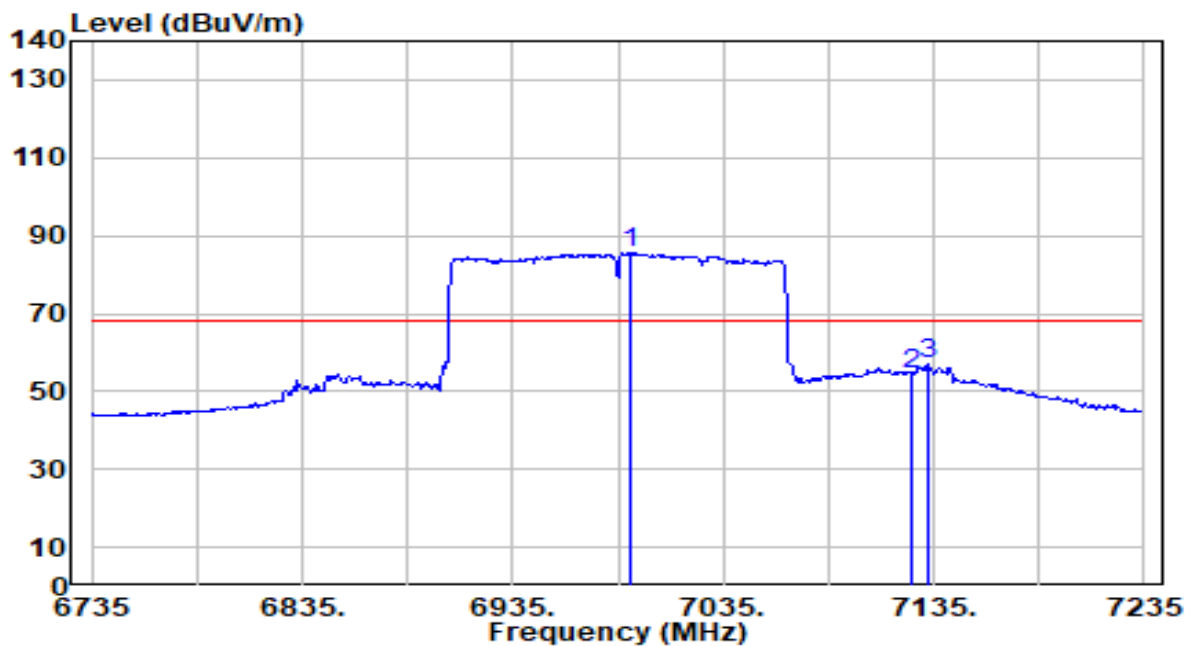


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6991.500	81.79	3.94	85.73	N/A	N/A	250	2	Average
2	7125.000	50.45	4.08	54.53	-13.67	68.20	250	2	Average
3	* 7132.500	52.79	4.09	56.88	-11.32	68.20	250	2	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

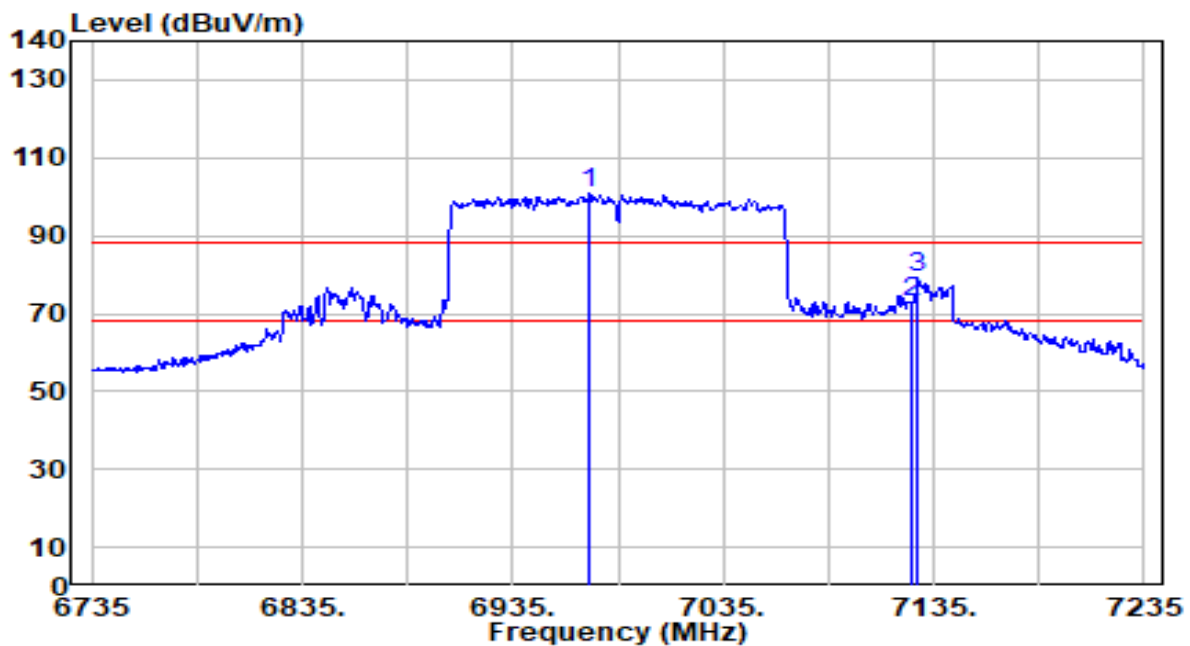


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6971.500	96.83	3.95	100.78	N/A	N/A	204	100	Peak
2	7125.000	68.94	4.08	73.02	-15.18	88.20	204	100	Peak
3	* 7127.500	75.38	4.08	79.46	-8.74	88.20	204	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-01-31
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_ ANT 1+2_NSS1	Test Voltage	By Notebook PC

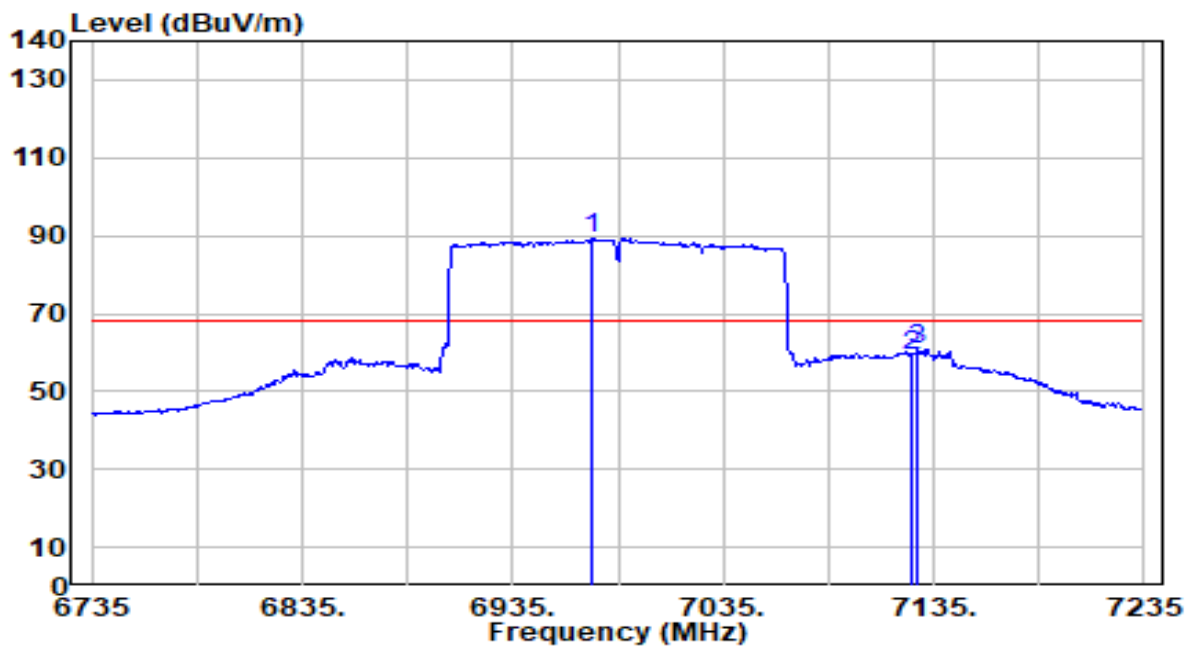


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6973.000	85.26	3.95	89.21	N/A	N/A	204	100	Average
2	7125.000	55.31	4.08	59.39	-8.81	68.20	204	100	Average
3	* 7127.000	56.76	4.08	60.85	-7.35	68.20	204	100	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band5_CH 1_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

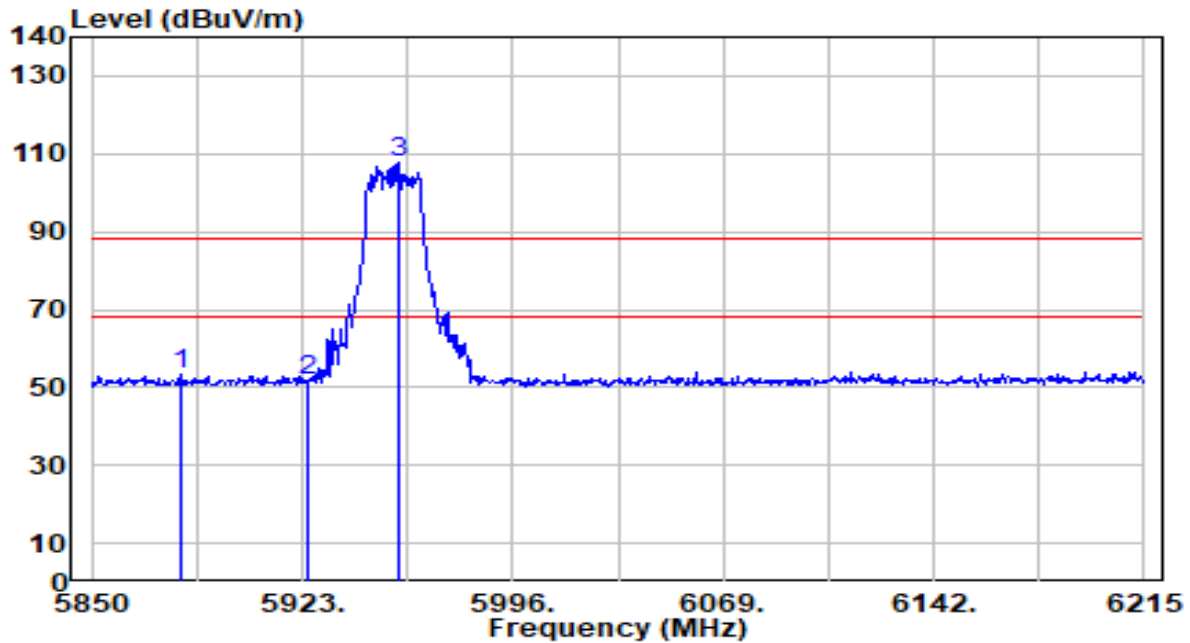


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5881.390	52.85	0.59	53.44	-34.76	88.20	226	185	Peak
2	5925.000	51.08	0.65	51.72	-36.48	88.20	226	185	Peak
3	5956.580	106.92	0.69	107.60	N/A	N/A	226	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band5_CH 1_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

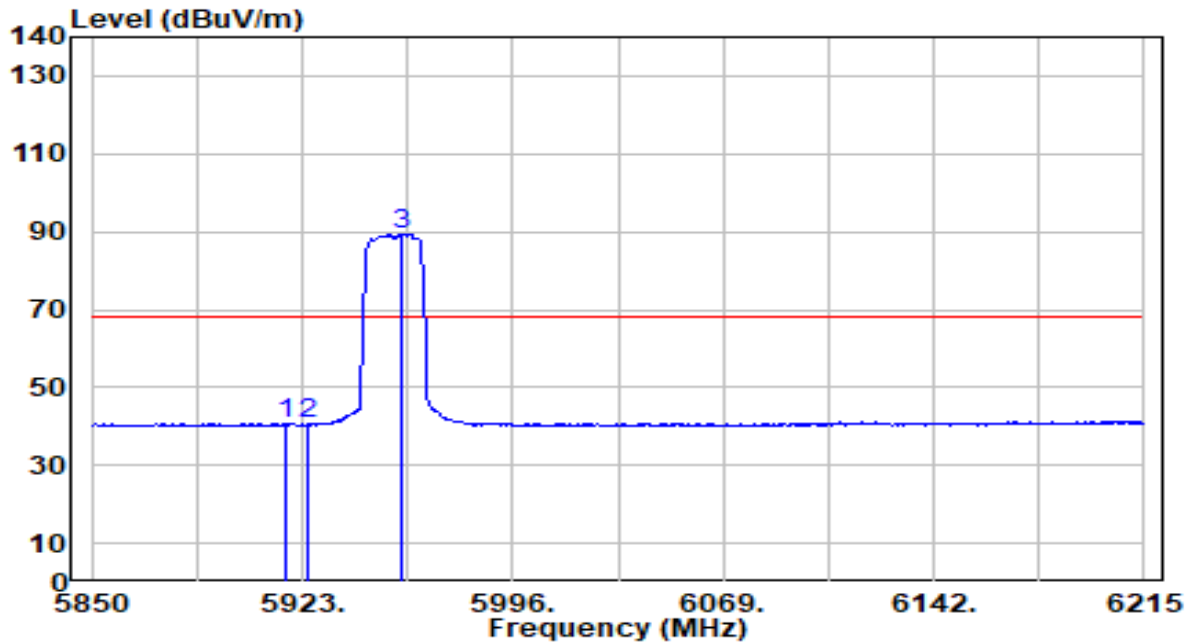


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5917.525	40.13	0.64	40.77	-27.43	68.20	226	185	Average
2		5925.000	39.82	0.65	40.47	-27.73	68.20	226	185	Average
3		5957.675	88.65	0.69	89.33	N/A	N/A	226	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band5_CH 1_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

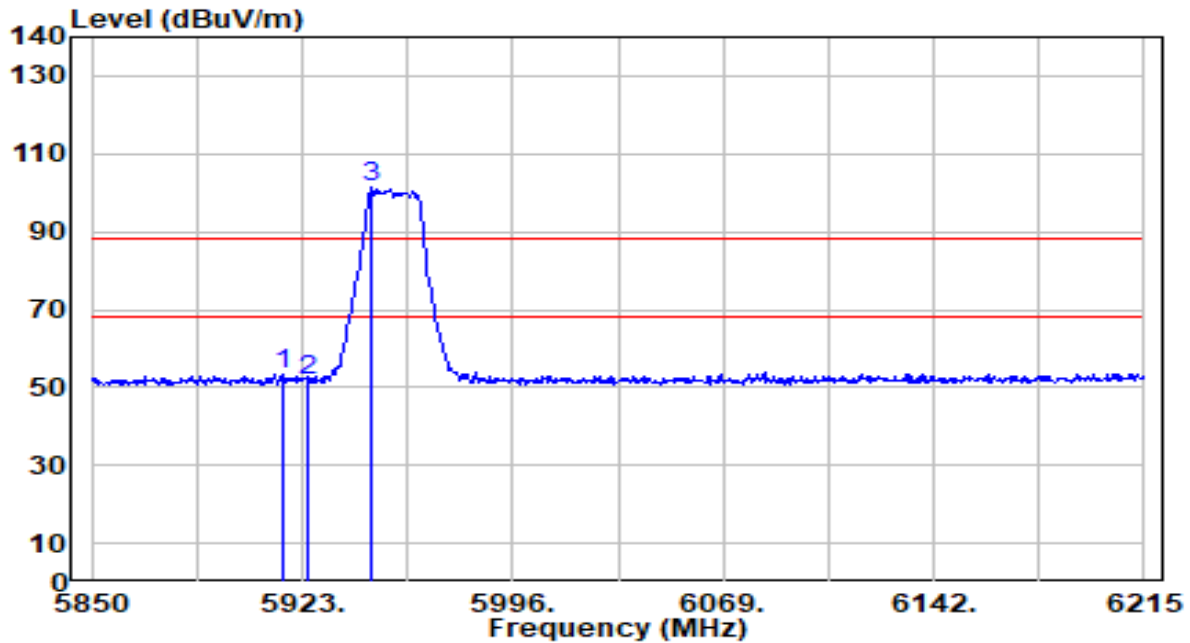


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	52.62	0.64	53.26	-34.94	88.20	225	136	Peak
2		51.27	0.65	51.92	-36.28	88.20	225	136	Peak
3		100.81	0.67	101.48	N/A	N/A	225	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band5_CH 1_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

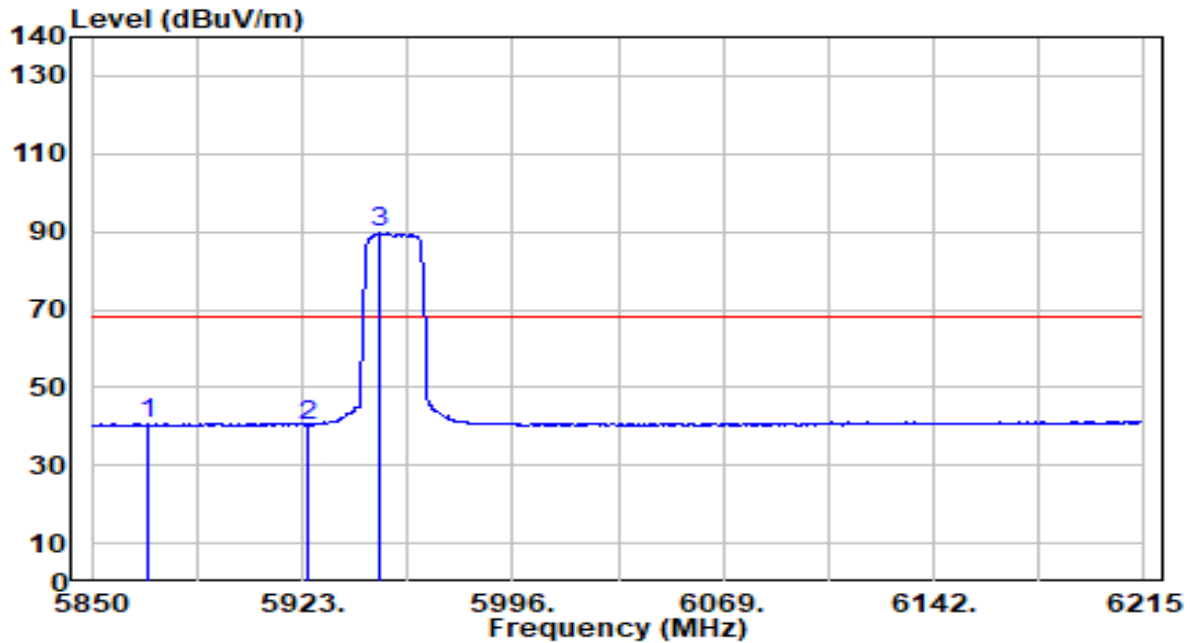


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5869.345	40.17	0.58	40.75	-27.45	68.20	225	136	Average
2	5925.000	39.77	0.65	40.41	-27.79	68.20	225	136	Average
3	5949.645	88.90	0.68	89.58	N/A	N/A	225	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band8_CH 233_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

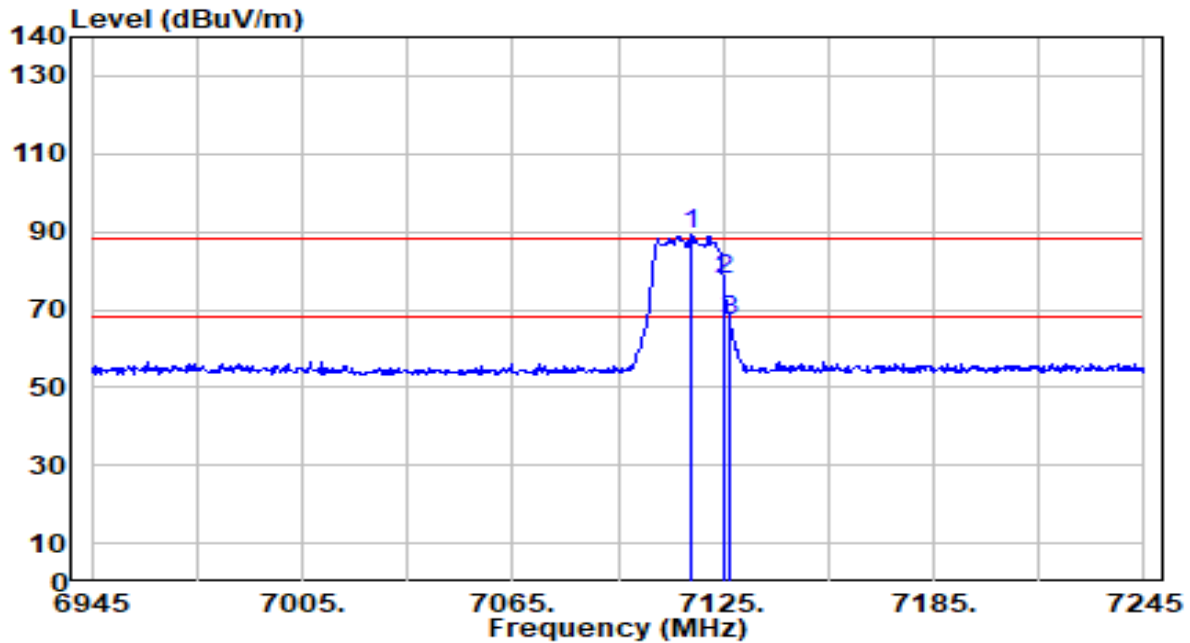


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7116.000	85.20	4.07	89.27	N/A	N/A	100	176	Peak
2	* 7125.000	73.51	4.08	77.59	-10.61	88.20	100	176	Peak
3	7126.800	62.75	4.08	66.84	-21.36	88.20	100	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band8_CH 233_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

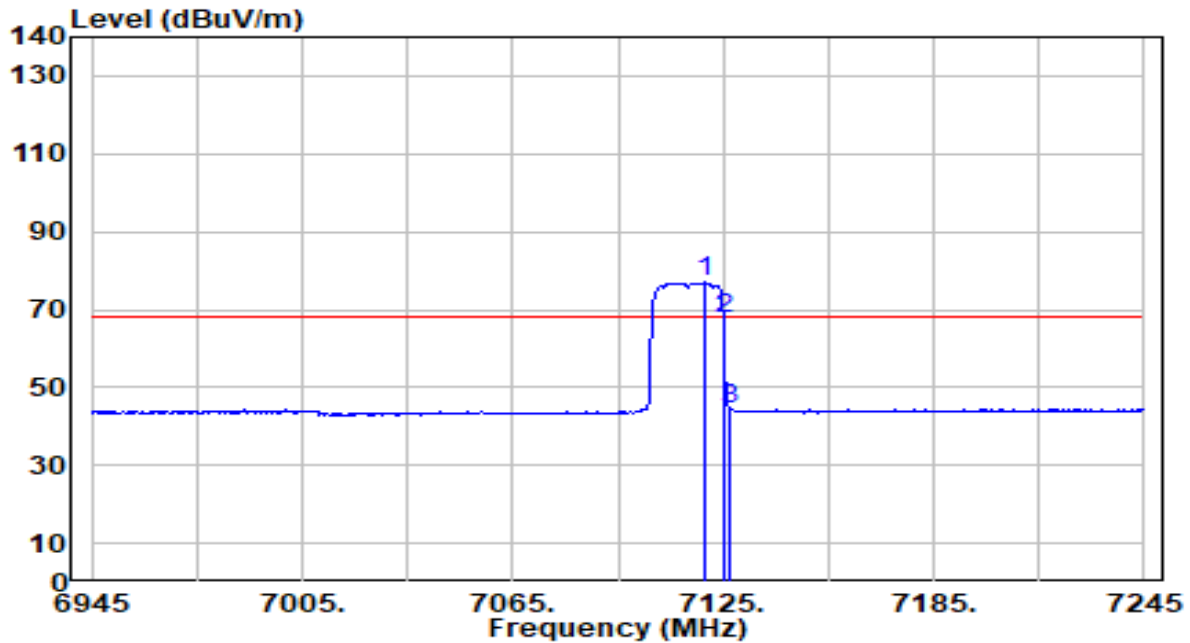


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7119.900	72.90	4.07	76.97	N/A	N/A	100	176	Average
2	* 7125.000	63.56	4.08	67.64	-0.56	68.20	100	176	Average
3	7126.800	40.38	4.08	44.47	-23.73	68.20	100	176	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band8_CH 233_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

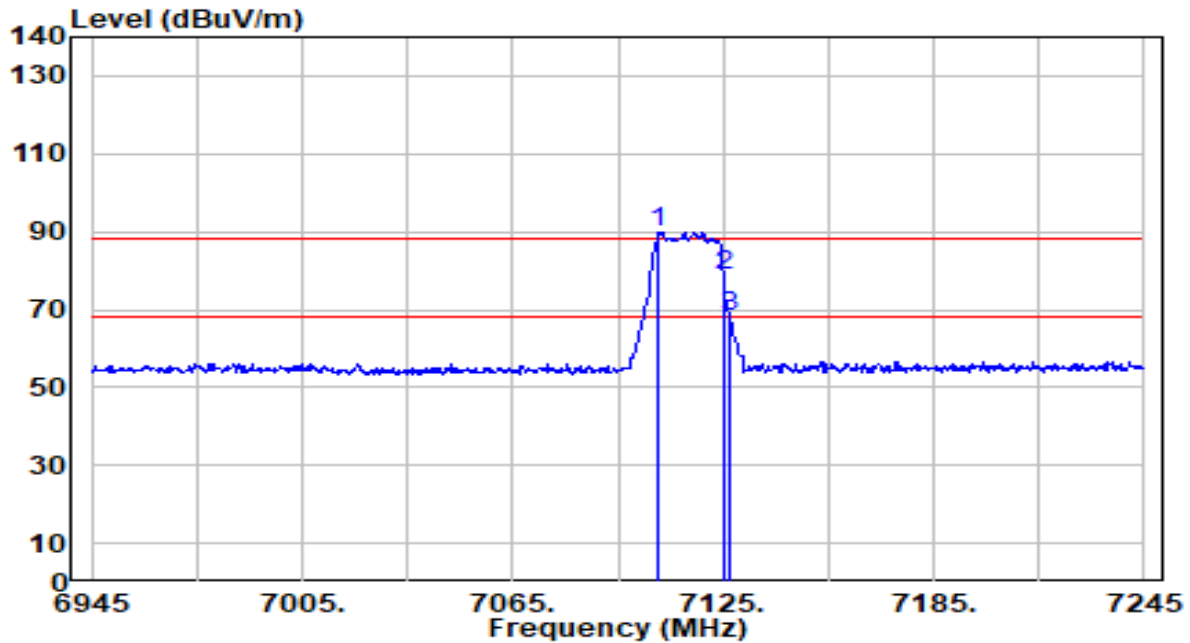


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7106.700	86.00	4.06	90.06	N/A	N/A	180	155	Peak
2	* 7125.000	74.48	4.08	78.56	-9.64	88.20	180	155	Peak
3	7126.800	64.23	4.08	68.31	-19.89	88.20	180	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band8_CH 233_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

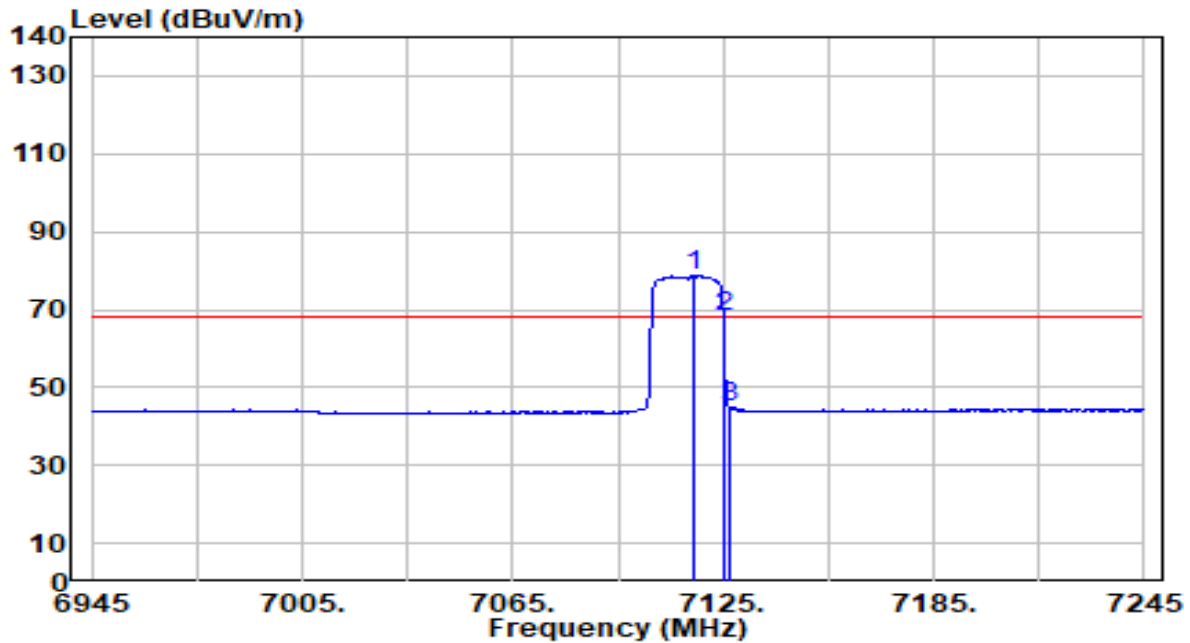


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7116.600	74.81	4.07	78.88	N/A	N/A	180	155	Average
2	* 7125.000	64.09	4.08	68.17	-0.03	68.20	180	155	Average
3	7126.800	40.85	4.08	44.93	-23.27	68.20	180	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band5_CH 3_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

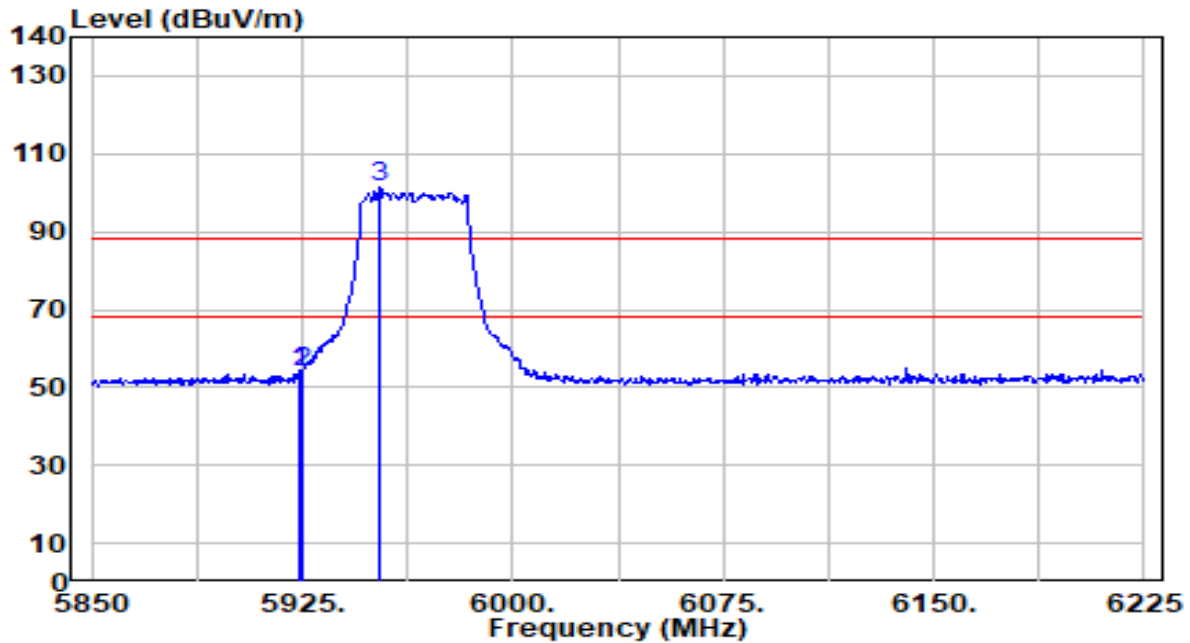


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5923.875	53.22	0.64	53.87	-34.33	88.20	212	185	Peak
2		5925.000	53.22	0.65	53.87	-34.33	88.20	212	185	Peak
3		5952.750	100.51	0.68	101.19	N/A	N/A	212	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band5_CH 3_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

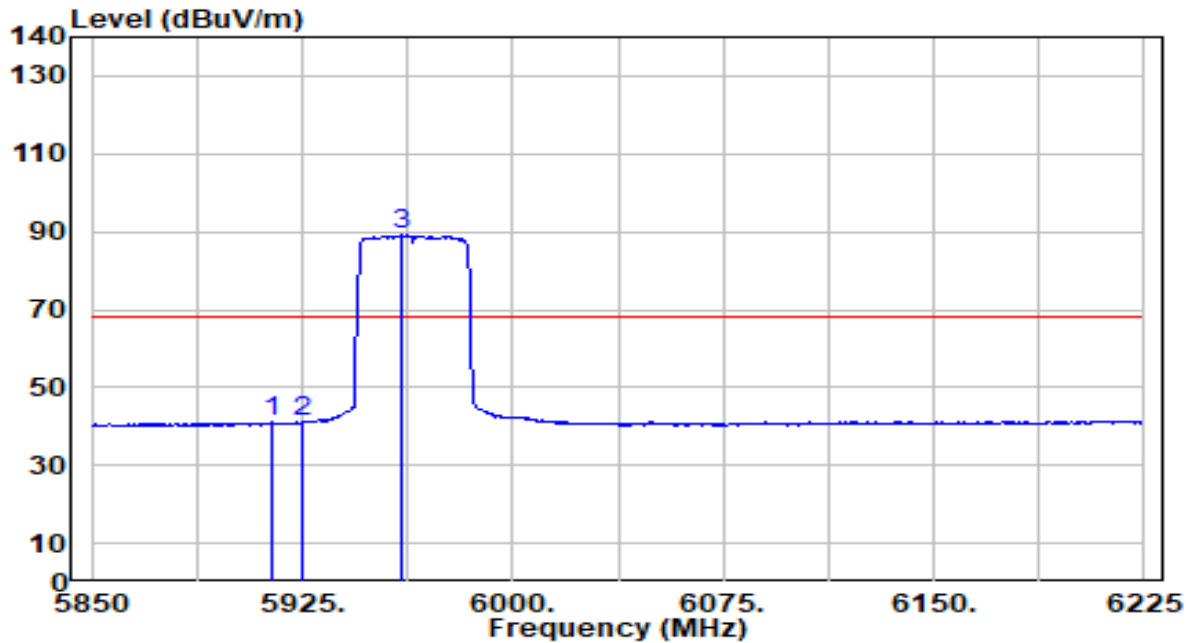


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5914.500	40.37	0.63	41.01	-27.19	68.20	212	185	Average
2		5925.000	40.33	0.65	40.97	-27.23	68.20	212	185	Average
3		5960.250	88.41	0.69	89.10	N/A	N/A	212	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band5_CH 3_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

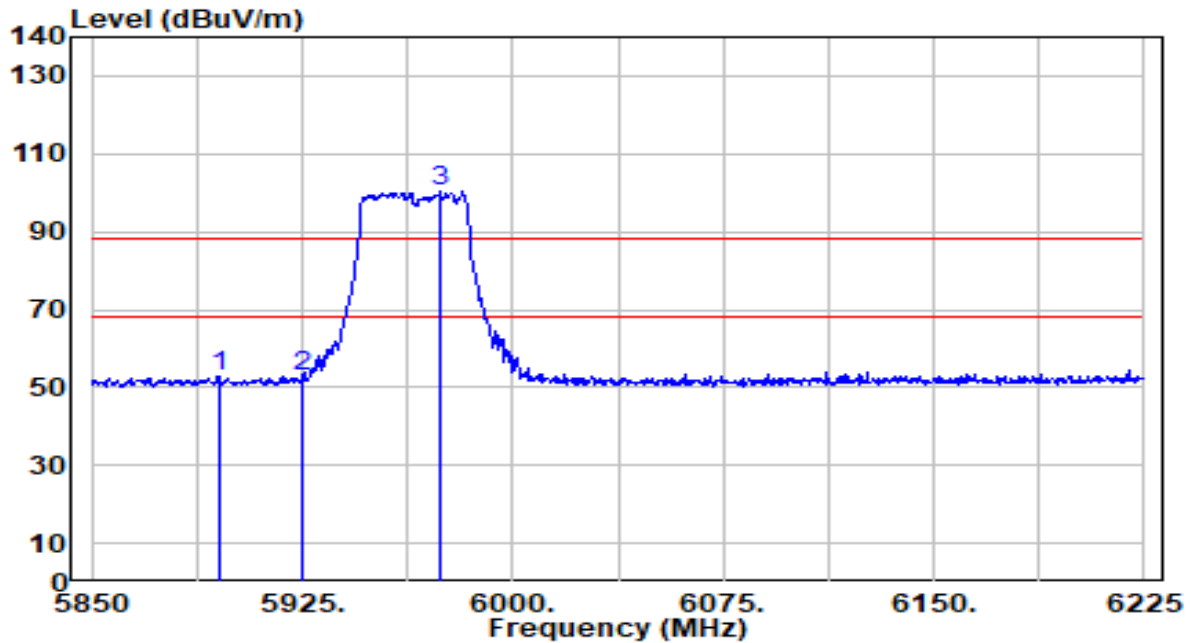


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5895.750	52.15	0.61	52.76	-35.44	88.20	213	125	Peak
2	5925.000	52.00	0.65	52.65	-35.55	88.20	213	125	Peak
3	5974.125	99.72	0.71	100.43	N/A	N/A	213	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band5_CH 3_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

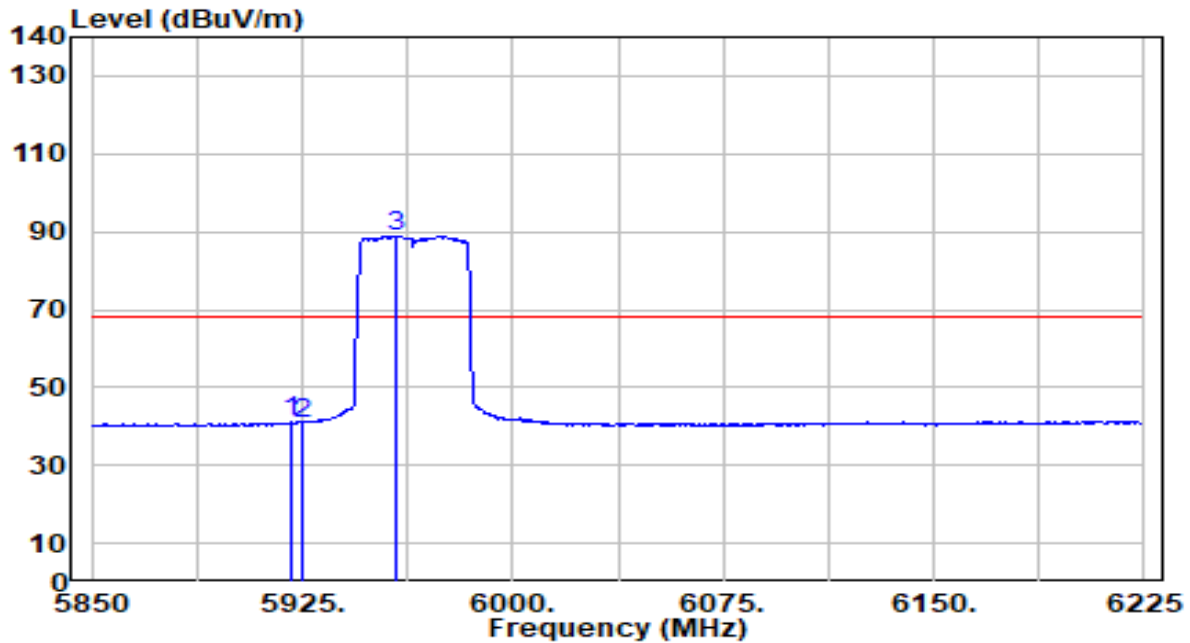


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5920.875	40.38	0.64	41.03	-27.17	68.20	213	125	Average
2		5925.000	40.30	0.65	40.94	-27.26	68.20	213	125	Average
3		5958.375	88.16	0.69	88.84	N/A	N/A	213	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band8_CH 227_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

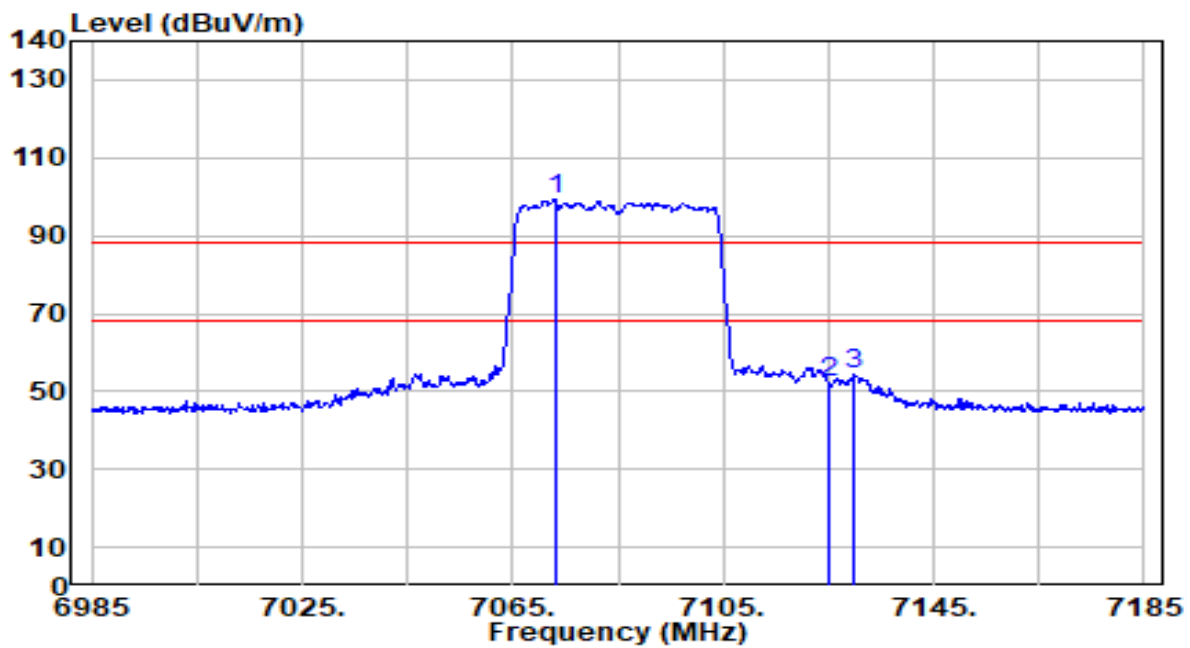


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7073.000	95.37	4.02	99.39	N/A	N/A	306	360	Peak
2	7125.000	47.97	4.08	52.05	-36.15	88.20	306	360	Peak
3	* 7130.000	50.40	4.09	54.48	-33.72	88.20	306	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band8_CH 227_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

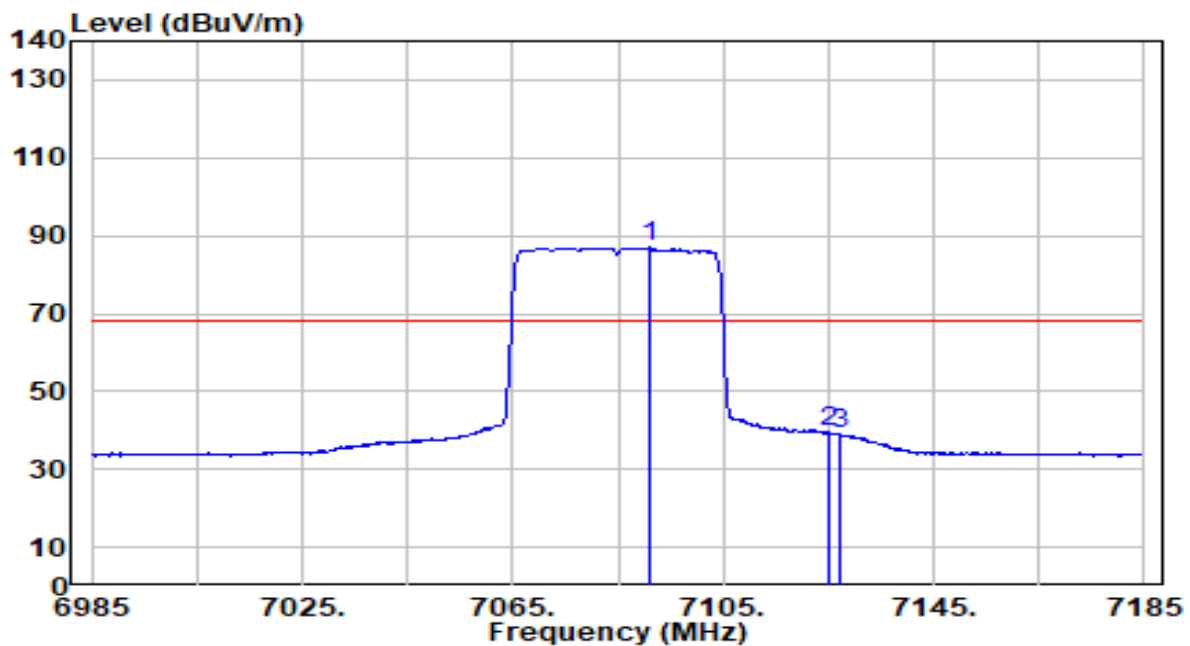


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7090.800	82.88	4.04	86.91	N/A	N/A	306	360	Average
2	* 7125.000	35.32	4.08	39.40	-28.80	68.20	306	360	Average
3	7127.000	35.06	4.08	39.14	-29.06	68.20	306	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band8_CH 227_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

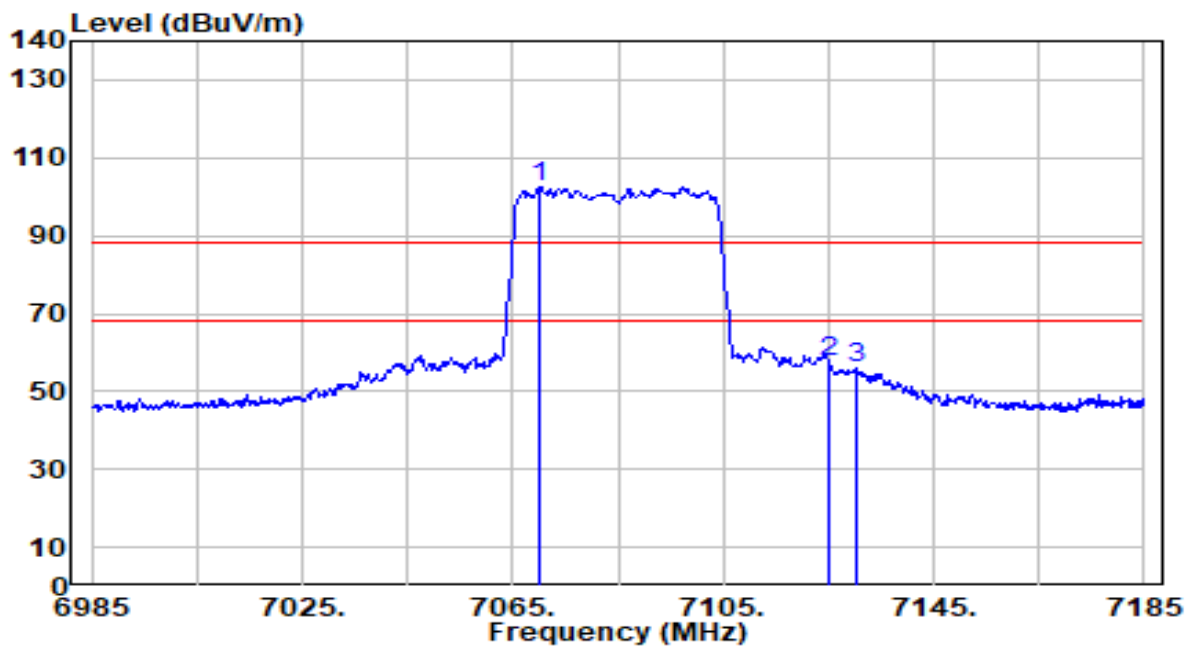


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7070.200	98.40	4.01	102.42	N/A	N/A	200	100	Peak
2	* 7125.000	53.75	4.08	57.83	-30.37	88.20	200	100	Peak
3	7130.400	51.94	4.09	56.03	-32.17	88.20	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band8_CH 227_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

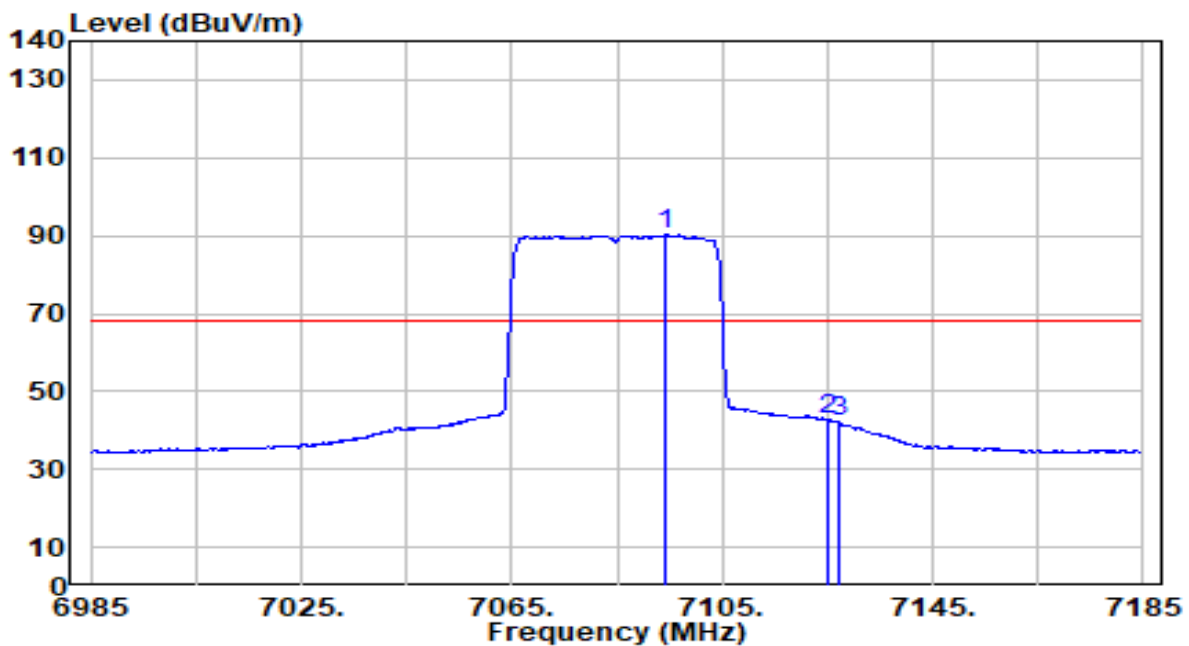


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7094.400	86.19	4.04	90.24	N/A	N/A	200	100	Average
2	* 7125.000	38.67	4.08	42.75	-25.45	68.20	200	100	Average
3	7127.000	37.92	4.08	42.00	-26.20	68.20	200	100	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band5_CH 7_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

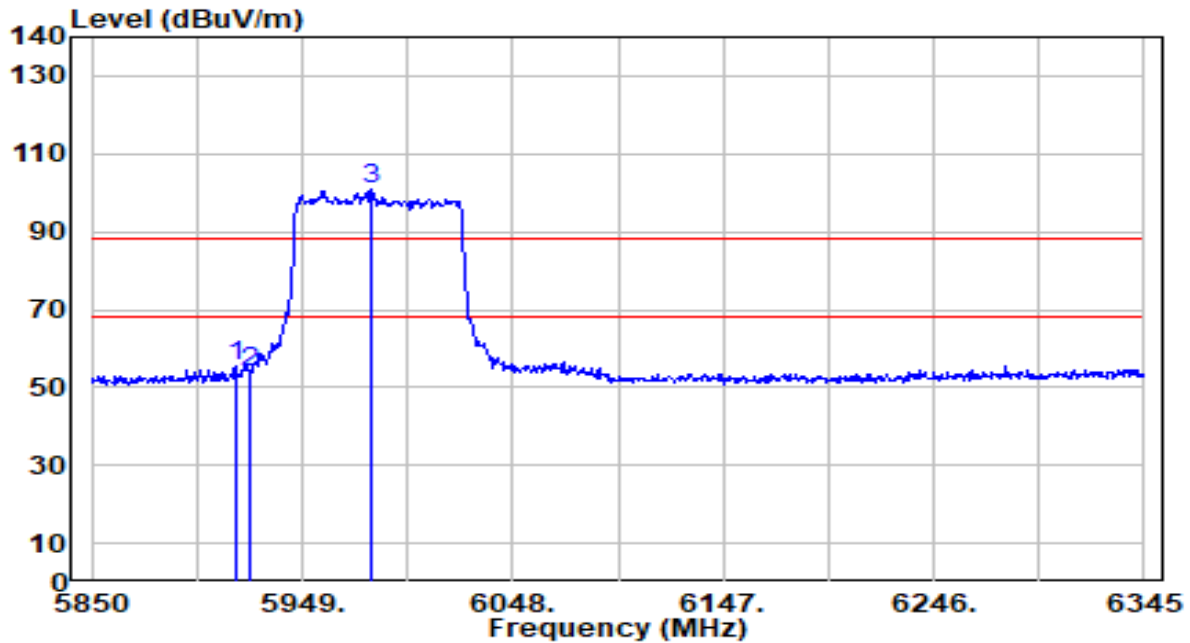


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5917.320	54.73	0.64	55.36	-32.84	88.20	206	199	Peak
2	5925.000	53.26	0.65	53.91	-34.29	88.20	206	199	Peak
3	5981.670	100.34	0.72	101.06	N/A	N/A	206	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band5_CH 7_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

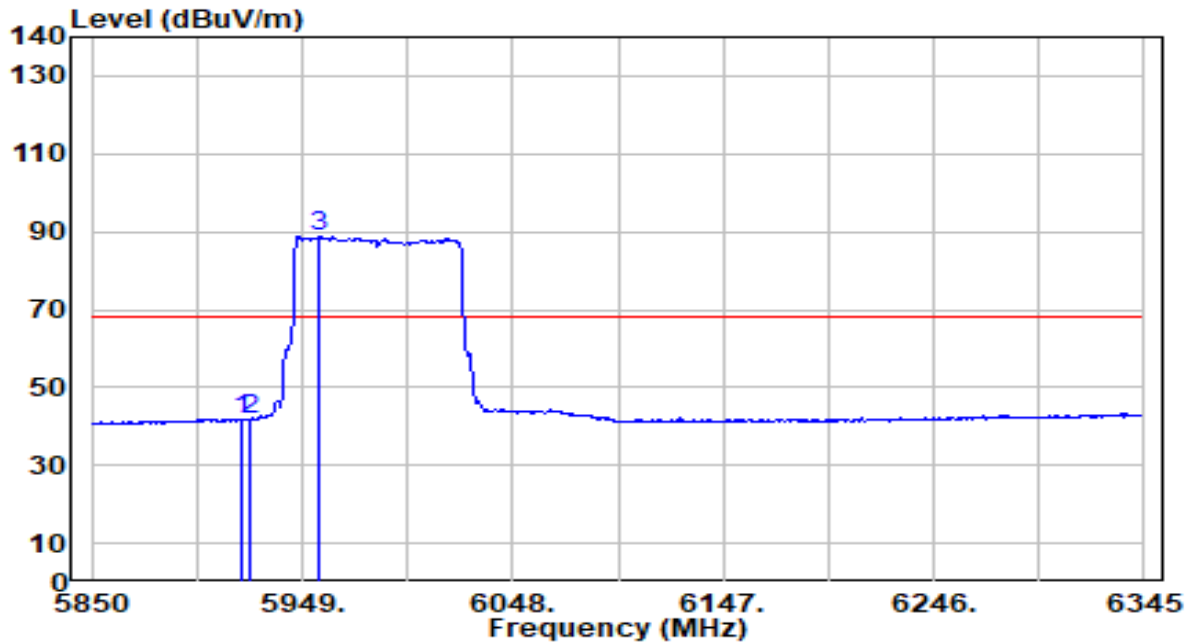


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5920.290	41.30	0.64	41.94	-26.26	68.20	206	199	Average
2		5925.000	41.25	0.65	41.90	-26.30	68.20	206	199	Average
3		5956.425	87.96	0.69	88.65	N/A	N/A	206	199	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band5_CH 7_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

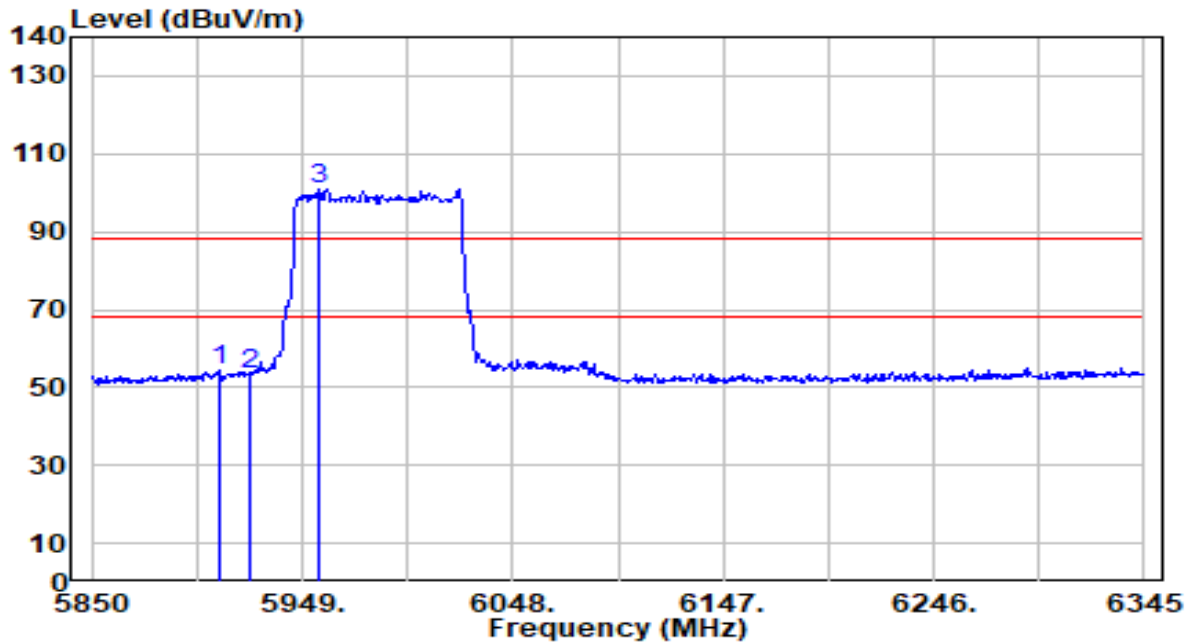


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5909.895	53.73	0.63	54.36	-33.84	88.20	232	136	Peak
2		5925.000	52.61	0.65	53.25	-34.95	88.20	232	136	Peak
3		5956.920	100.36	0.69	101.05	N/A	N/A	232	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band5_CH 7_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

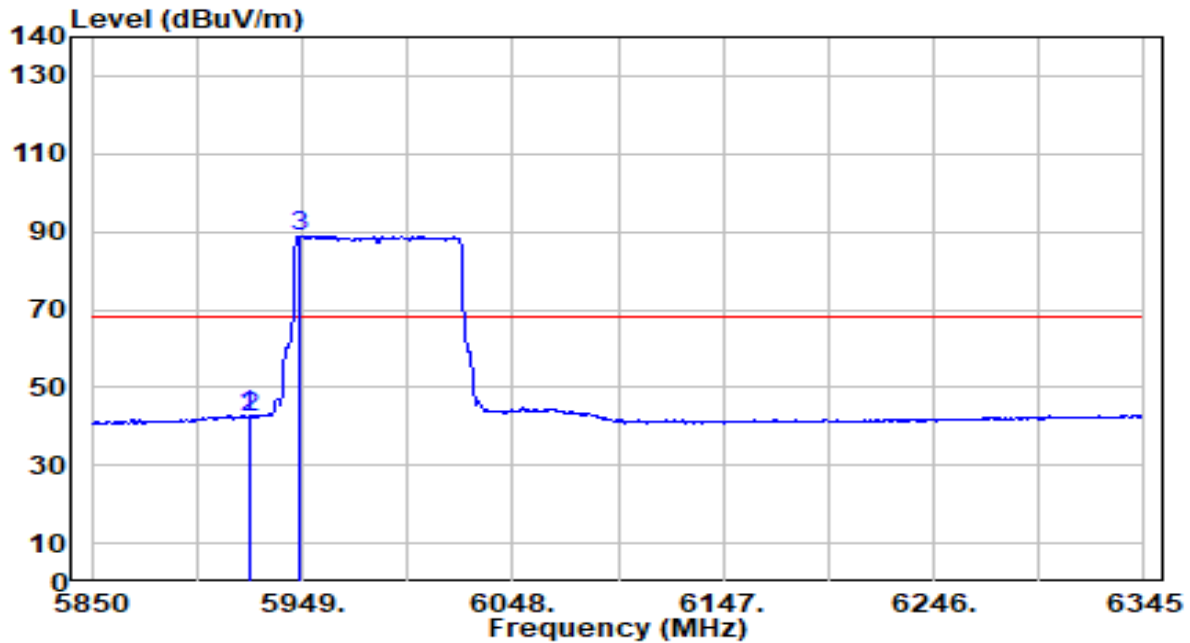


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5923.755	42.16	0.64	42.80	-25.40	68.20	232	136	Average
2		5925.000	41.67	0.65	42.31	-25.89	68.20	232	136	Average
3		5947.515	88.33	0.67	89.01	N/A	N/A	232	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

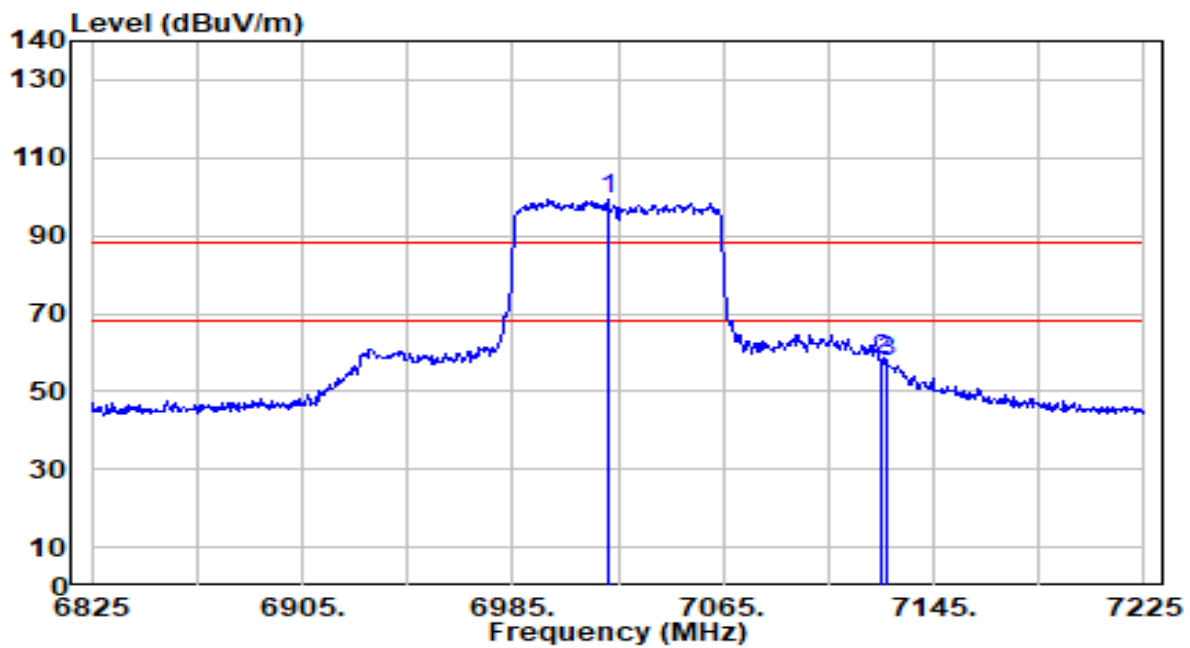


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7021.400	95.50	3.96	99.45	N/A	N/A	256	360	Peak
2	* 7125.000	54.25	4.08	58.33	-29.87	88.20	256	360	Peak
3	7127.400	53.31	4.08	57.40	-30.80	88.20	256	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

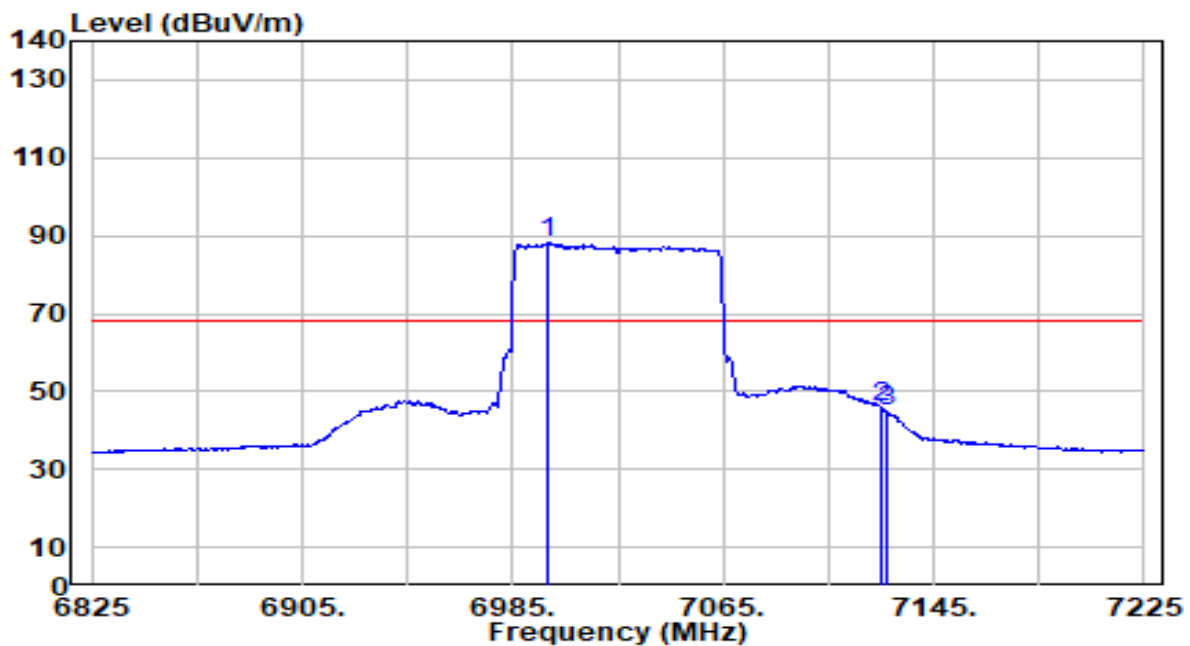


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6998.600	84.23	3.93	88.16	N/A	N/A	256	360	Average
2	* 7125.000	41.62	4.08	45.70	-22.50	68.20	256	360	Average
3	7127.400	40.83	4.08	44.91	-23.29	68.20	256	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

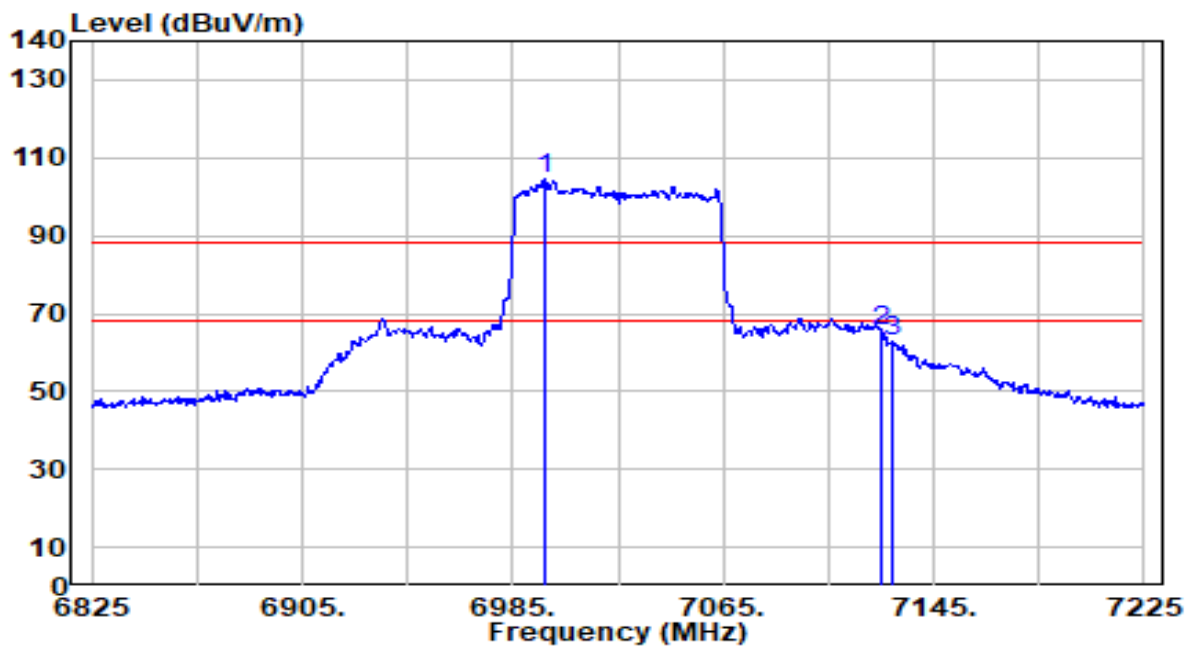


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6997.000	100.52	3.93	104.45	N/A	N/A	200	58	Peak
2	* 7125.000	61.35	4.08	65.43	-22.77	88.20	200	58	Peak
3	7129.400	58.66	4.09	62.74	-25.46	88.20	200	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band8_CH 215_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

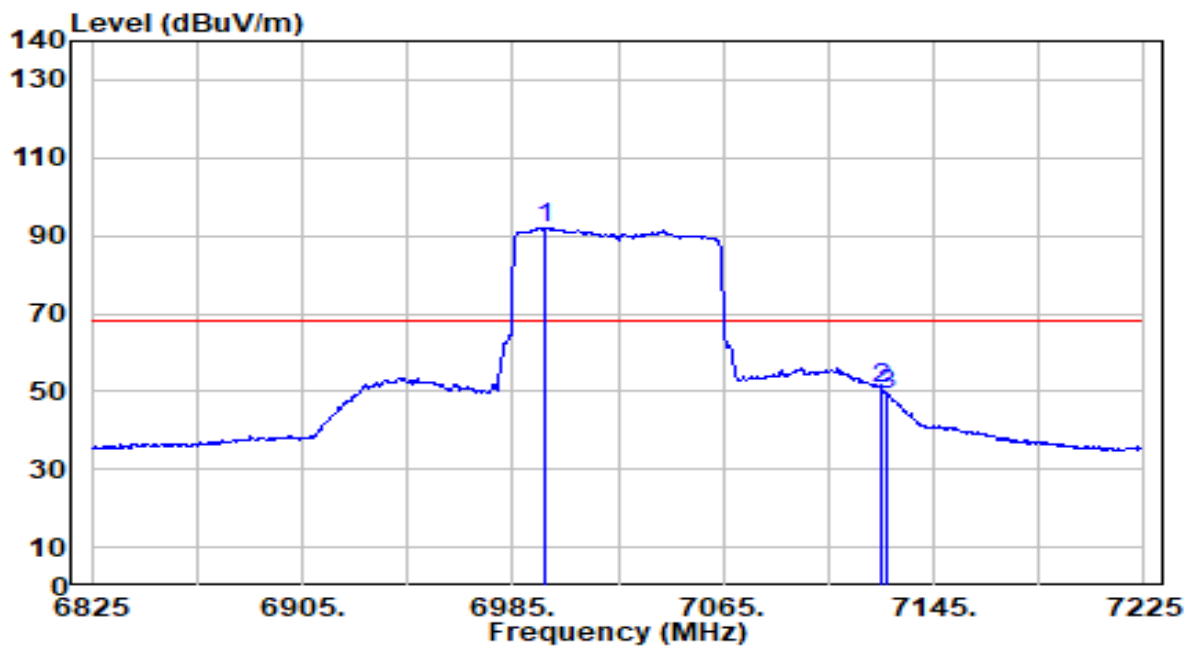


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6997.400	88.23	3.93	92.16	N/A	N/A	200	58	Average
2	* 7125.000	46.39	4.08	50.47	-17.73	68.20	200	58	Average
3	7127.400	45.28	4.08	49.37	-18.83	68.20	200	58	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band5_CH 15_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

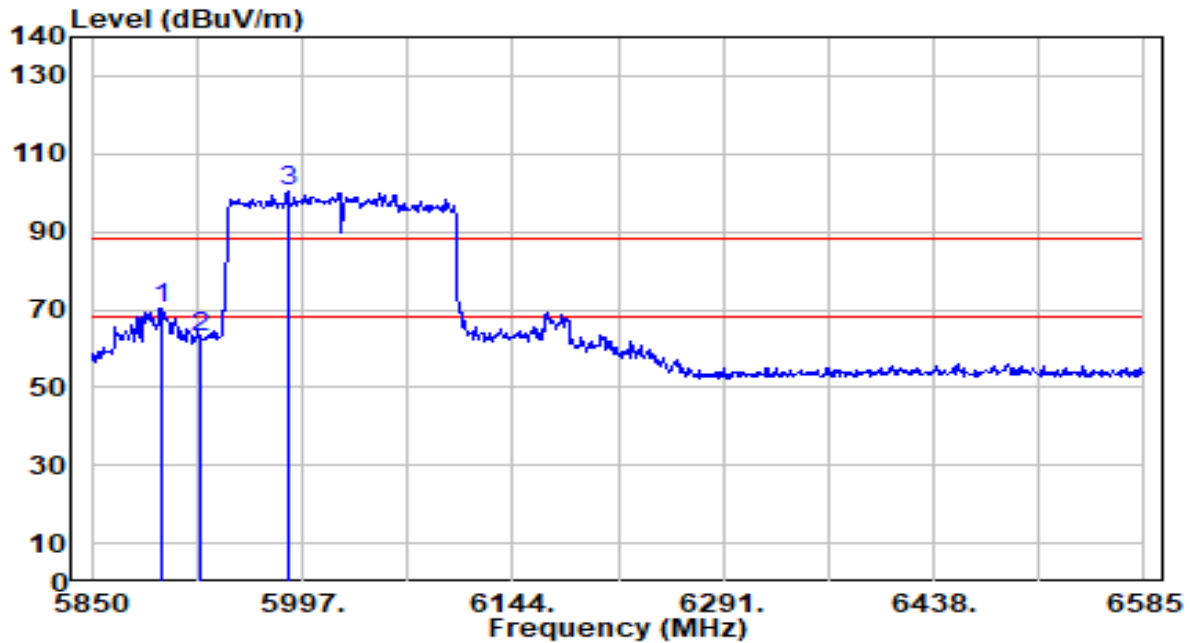


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5898.510	69.76	0.61	70.37	-17.83	88.20	206	186	Peak
2	5925.000	62.00	0.65	62.64	-25.56	88.20	206	186	Peak
3	5986.710	99.42	0.72	100.14	N/A	N/A	206	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band5_CH 15_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

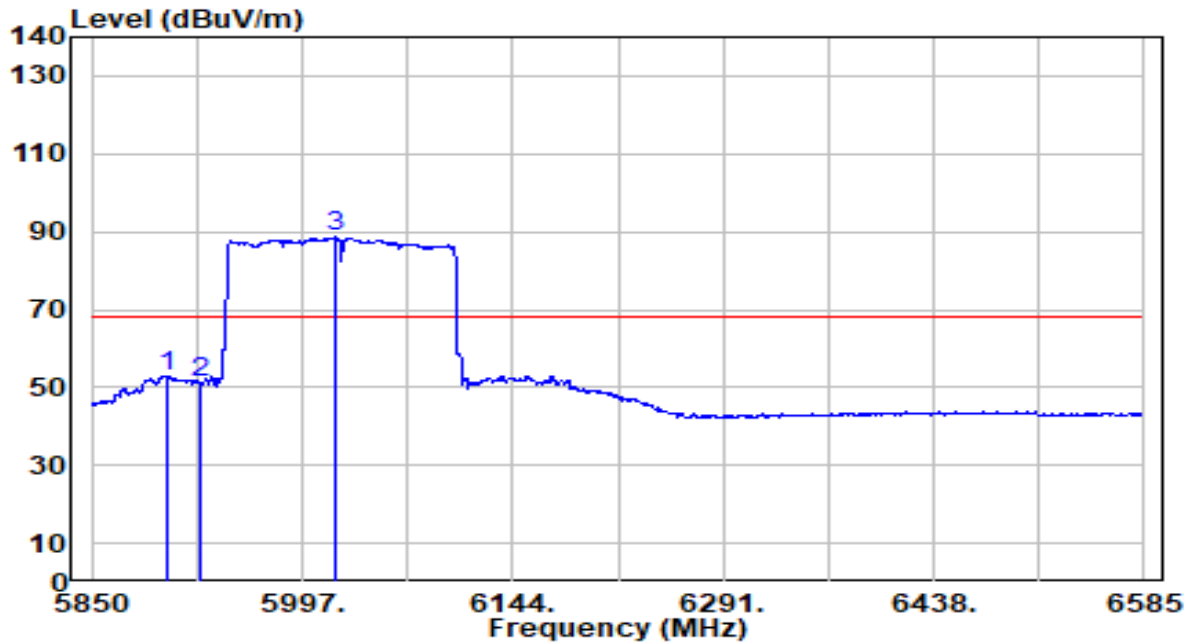


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5902.185	52.39	0.62	53.01	-15.19	68.20	206	186	Average
2		5925.000	50.66	0.65	51.30	-16.90	68.20	206	186	Average
3		6019.785	87.89	0.80	88.70	N/A	N/A	206	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band5_CH 15_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

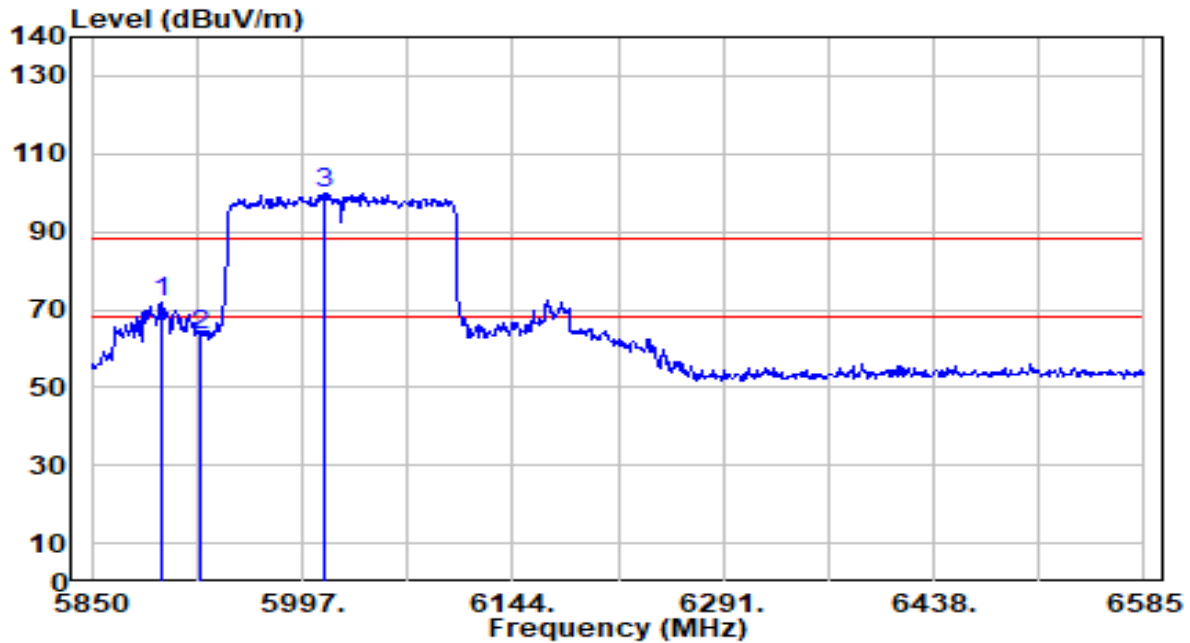


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5898.510	71.03	0.61	71.64	-16.56	88.20	210	136	Peak
2	5925.000	62.91	0.65	63.55	-24.65	88.20	210	136	Peak
3	6011.700	99.02	0.78	99.80	N/A	N/A	210	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE7800 Tri-Band Wi-Fi 6E Router	Date of Test	2023-03-31
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band5_CH 15_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

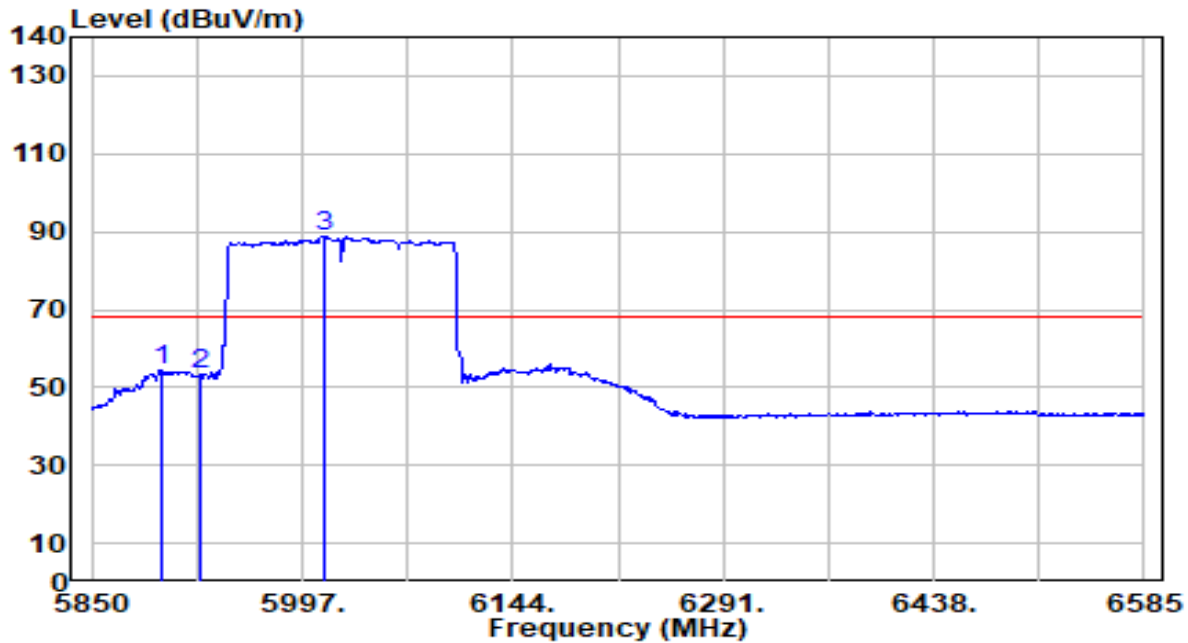


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5898.510	53.73	0.61	54.34	-13.86	68.20	210	136	Average
2	5925.000	52.68	0.65	53.32	-14.88	68.20	210	136	Average
3	6013.170	88.14	0.78	88.93	N/A	N/A	210	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

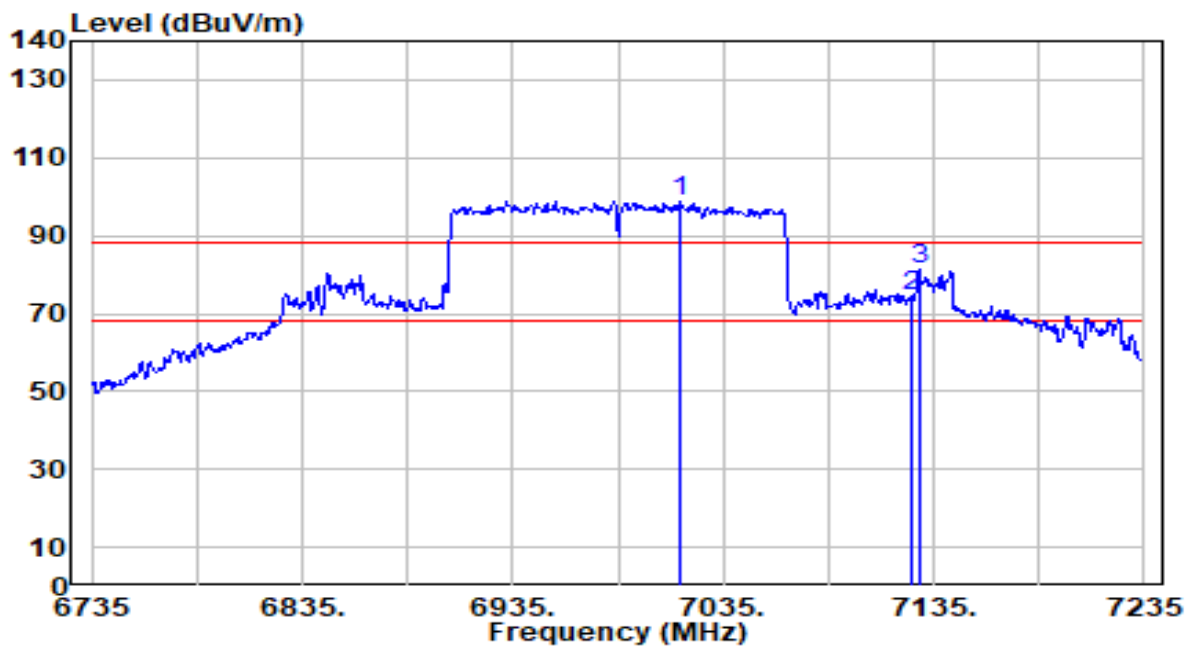


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7014.500	94.93	3.95	98.88	N/A	N/A	259	360	Peak
2	7125.000	70.39	4.08	74.47	-13.73	88.20	259	360	Peak
3	* 7128.000	77.06	4.08	81.14	-7.06	88.20	259	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

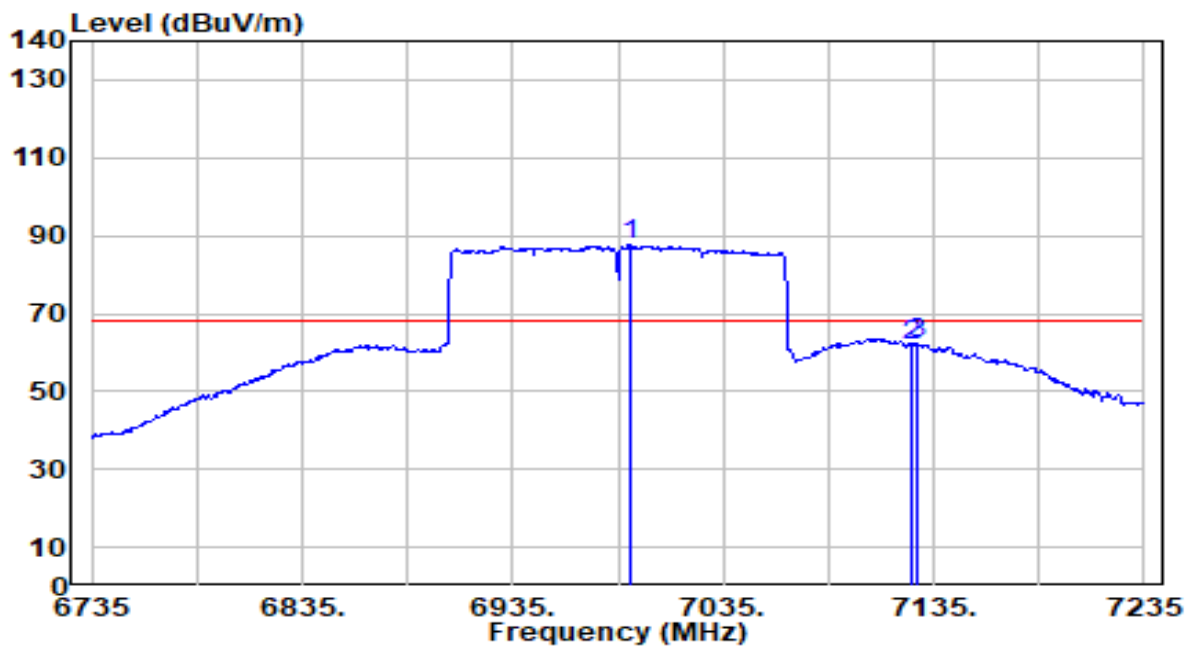


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6990.500	83.57	3.94	87.50	N/A	N/A	259	360	Average
2	7125.000	57.91	4.08	61.99	-6.21	68.20	259	360	Average
3	* 7127.000	58.08	4.08	62.17	-6.03	68.20	259	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

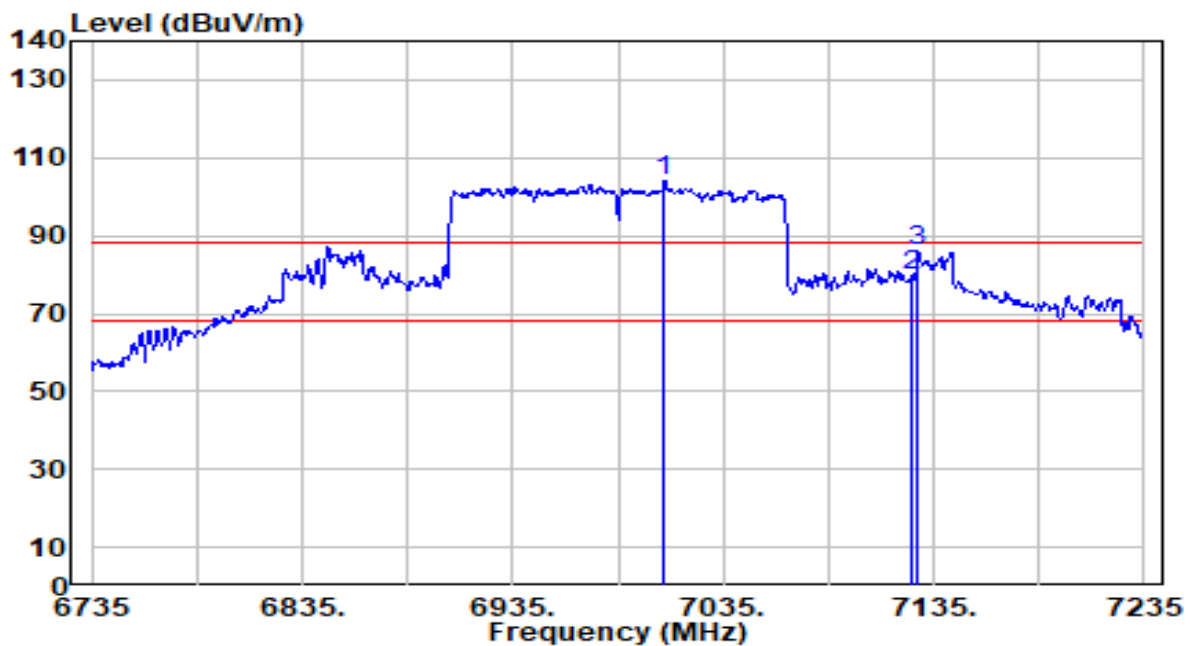


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7007.000	100.23	3.94	104.17	N/A	N/A	174	91	Peak
2	7125.000	75.85	4.08	79.93	-8.27	88.20	174	91	Peak
3	* 7127.500	81.88	4.08	85.96	-2.24	88.20	174	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band8_CH 207_ ANT 1+2_NSS2	Test Voltage	By Notebook PC

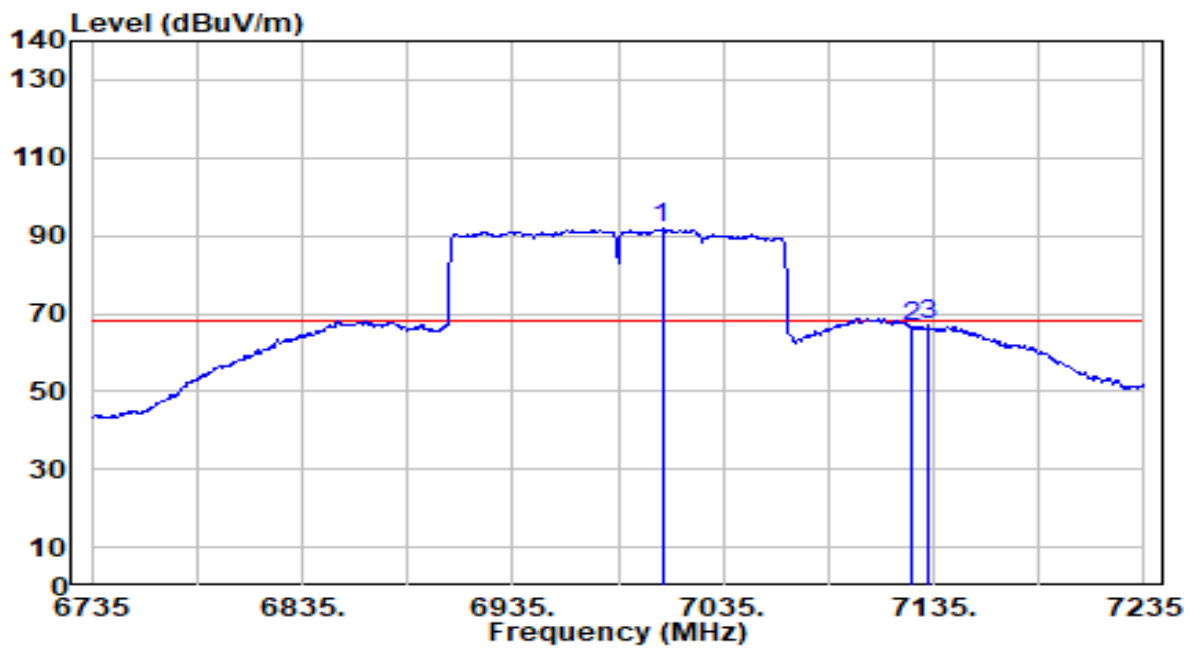

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7006.000	87.84	3.94	91.77	N/A	N/A	174	91	Average
2	7125.000	62.45	4.08	66.53	-1.67	68.20	174	91	Average
3	* 7132.500	62.92	4.09	67.01	-1.19	68.20	174	91	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.10. AC Conducted Emissions


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

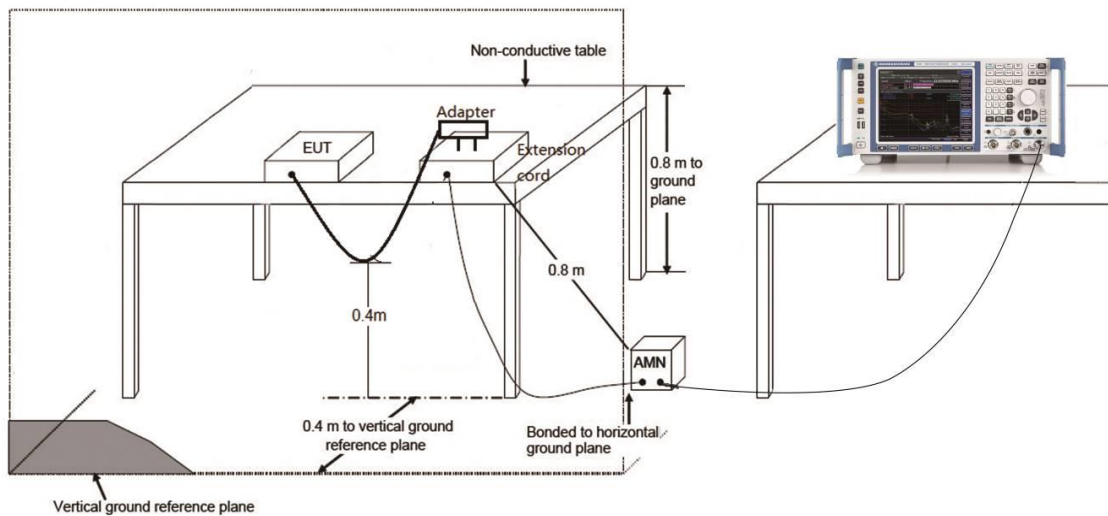

6.10.3. Test Result

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-02-10
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.7°C /67%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 1+2	Test Voltage	AC 120V/60Hz

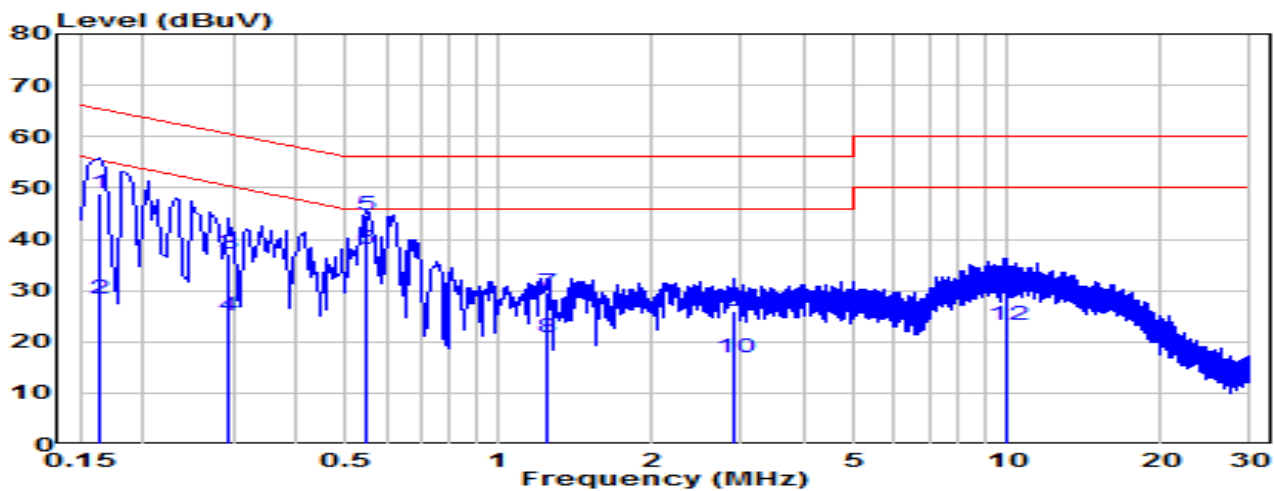


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.163	39.17	9.62	48.79	-16.50	65.28	QP
2	0.163	18.70	9.62	28.33	-26.96	55.28	Average
3	0.294	27.42	9.63	37.05	-23.36	60.41	QP
4	0.294	15.43	9.63	25.05	-25.36	50.41	Average
5	*	0.550	9.64	44.62	-11.38	56.00	QP
6	*	0.550	9.64	38.01	-7.99	46.00	Average
7	1.239	19.82	9.67	29.50	-26.50	56.00	QP
8	1.239	11.07	9.67	20.75	-25.25	46.00	Average
9	2.904	16.11	9.71	25.82	-30.18	56.00	QP
10	2.904	7.06	9.71	16.77	-29.23	46.00	Average
11	9.914	20.22	9.86	30.08	-29.92	60.00	QP
12	9.914	13.50	9.86	23.36	-26.64	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-02-10
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.7°C /67%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 1+2	Test Voltage	AC 120V/60Hz

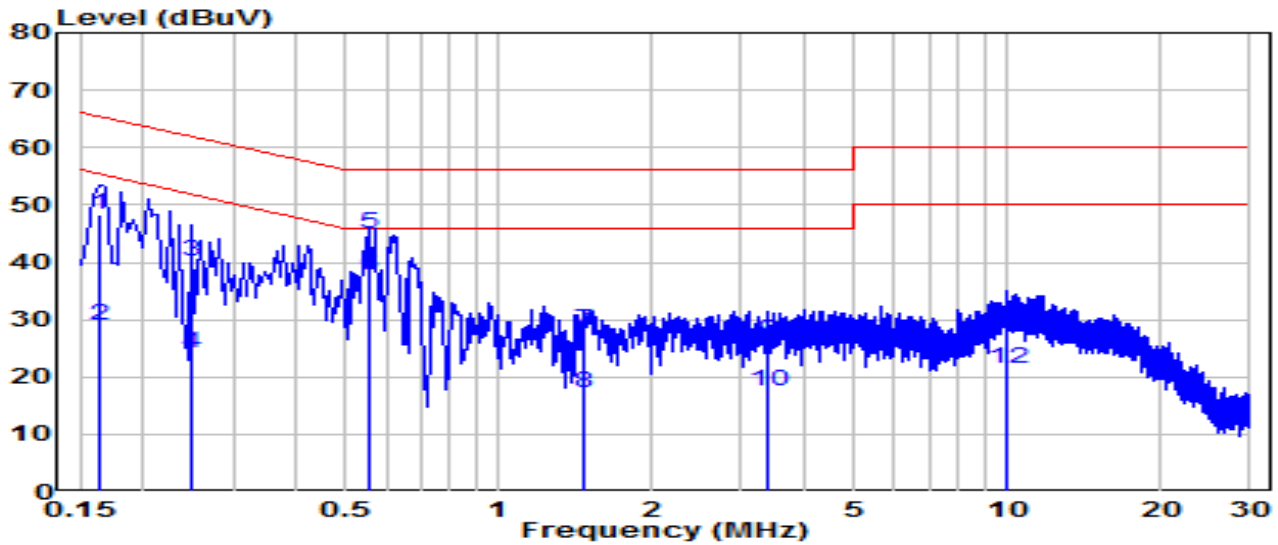


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	38.64	9.62	48.26	-17.02	65.28	QP
2	0.163	19.29	9.62	28.91	-26.38	55.28	Average
3	0.249	30.40	9.63	40.03	-21.76	61.79	QP
4	0.249	14.67	9.63	24.30	-27.50	51.79	Average
5	*	0.559	9.65	44.86	-11.14	56.00	QP
6	*	0.559	9.65	37.72	-8.28	46.00	Average
7	1.477	18.44	9.68	28.12	-27.88	56.00	QP
8	1.477	7.49	9.68	17.17	-28.83	46.00	Average
9	3.394	16.61	9.72	26.33	-29.67	56.00	QP
10	3.394	7.81	9.72	17.53	-28.47	46.00	Average
11	9.941	18.20	9.87	28.07	-31.93	60.00	QP
12	9.941	11.63	9.87	21.50	-28.50	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-02-10
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.7°C /67%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 1+2	Test Voltage	AC 240V/60Hz

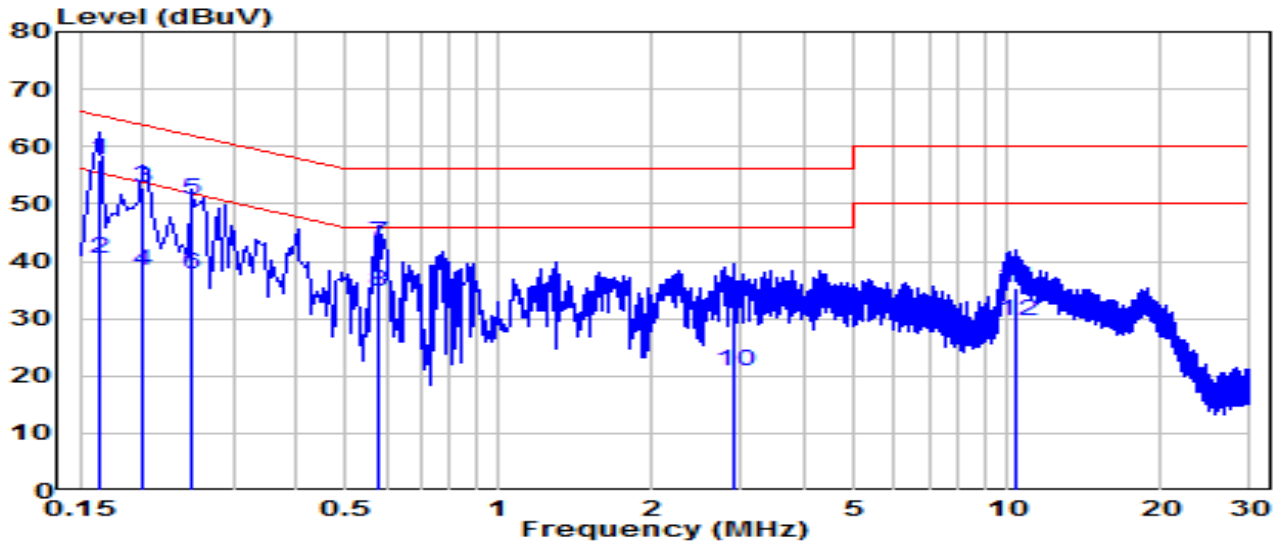


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	* 0.163	47.93	9.62	57.55	-7.73	65.28	QP
2	* 0.163	30.90	9.62	40.52	-14.76	55.28	Average
3	0.199	43.34	9.62	52.97	-10.66	63.63	QP
4	0.199	28.62	9.62	38.25	-15.38	53.63	Average
5	0.249	41.19	9.63	50.81	-10.98	61.79	QP
6	0.249	28.08	9.63	37.70	-14.09	51.79	Average
7	0.577	33.43	9.65	43.08	-12.92	56.00	QP
8	0.577	25.07	9.65	34.71	-11.29	46.00	Average
9	2.913	21.30	9.71	31.01	-24.99	56.00	QP
10	2.913	11.04	9.71	20.74	-25.26	46.00	Average
11	10.409	25.35	9.86	35.21	-24.79	60.00	QP
12	10.409	19.87	9.86	29.74	-20.26	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Wi-Fi 6E High Gain Wireless USB Adapter	Date of Test	2023-02-10
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.7°C /67%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11ax-20MHz_TX_Band5_CH 33_ANT 1+2	Test Voltage	AC 240V/60Hz

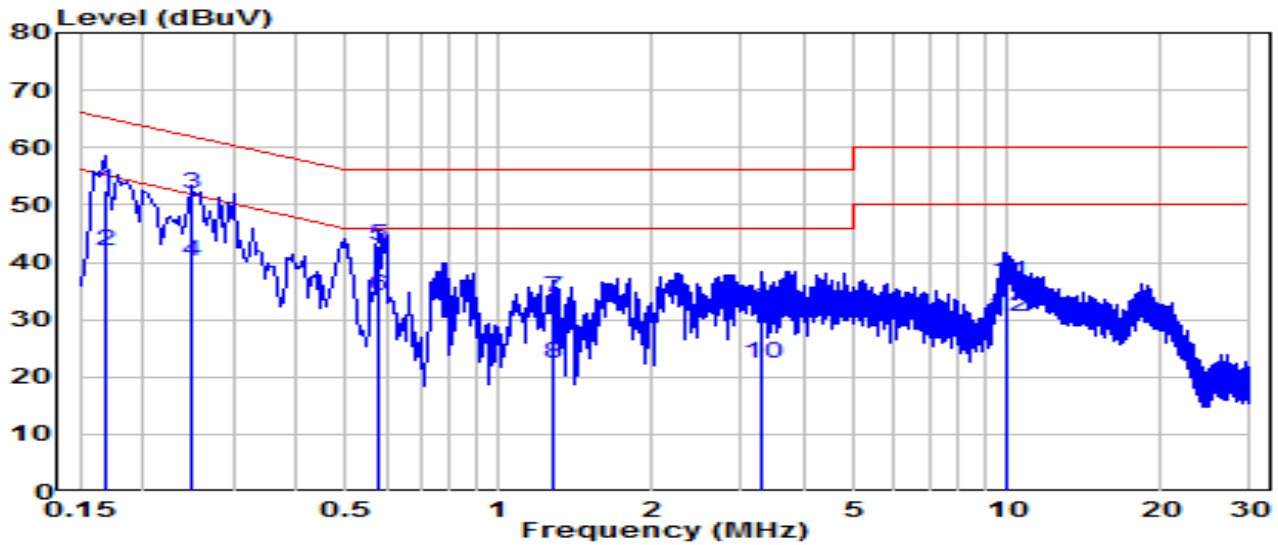

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	43.00	9.62	52.62	-12.44	65.06	QP
2	0.168	32.29	9.62	41.91	-13.15	55.06	Average
3	* 0.249	42.28	9.63	51.90	-9.89	61.79	QP
4	* 0.249	30.57	9.63	40.20	-11.59	51.79	Average
5	0.582	33.17	9.65	42.81	-13.19	56.00	QP
6	0.582	24.37	9.65	34.02	-11.98	46.00	Average
7	1.284	24.05	9.68	33.72	-22.28	56.00	QP
8	1.284	12.53	9.68	22.20	-23.80	46.00	Average
9	3.282	21.95	9.72	31.67	-24.33	56.00	QP
10	3.282	12.66	9.72	22.38	-23.62	46.00	Average
11	10.000	26.66	9.87	36.53	-23.47	60.00	QP
12	10.000	20.53	9.87	30.40	-19.60	50.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

7. Conclusion

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

Appendix A : Test Setup Photograph

Refer to “2301TW0105-UT” file.

Appendix B : External Photograph

Refer to “2301TW0105-UE” file.

Appendix C : Internal Photograph

Refer to “2301TW0105-UI” file.

————— The End —————