

## RF MEASUREMENT REPORT

---

**FCC ID** : 2AXJ4X95  
**Applicant** : TP-Link Corporation Limited  
**Application Type** : Certification  
**Product** : AX7800 Whole Home Mesh Wi-Fi 6 System  
**Model No.** : Deco X95  
**Brand Name** : tp-link  
**FCC Classification** : Unlicensed National Information Infrastructure (NII)  
**FCC Rule Part(s)** : Part15 Subpart E (Section 15.407)  
**Received Date** : July 19, 2022  
**Test Date** : August 3, 2022 ~ August 18, 2022

**Test By** : Fran Chen  
( Fran Chen )

**Reviewed By** : Paddy Chen  
( Paddy Chen )

**Approved By** : Chenz Ker  
( Chenz Ker )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2207TW0118-U2	1.0	Original Report	2022-09-30	Valid

# CONTENTS

Description	Page
<b>General Information</b> .....	<b>6</b>
<b>1. INTRODUCTION</b> .....	<b>7</b>
1.1. Scope .....	7
1.2. MRT Test Location .....	7
<b>2. PRODUCT INFORMATION</b> .....	<b>8</b>
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report .....	9
2.4. Description of Available Antennas.....	10
2.5. Test Mode .....	11
2.6. Configuration of Test System.....	12
2.7. Test System Details.....	12
2.8. Description of Test Software .....	12
2.9. Applied Standards .....	13
2.10. Duty Cycle .....	13
2.11. Test Configuration .....	15
2.12. EMI Suppression Device(s)/Modifications.....	15
2.13. Labeling Requirements.....	15
<b>3. DESCRIPTION OF TEST</b> .....	<b>16</b>
3.1. Evaluation Procedure .....	16
3.2. AC Line Conducted Emissions .....	16
3.3. Radiated Emissions .....	17
<b>4. ANTENNA REQUIREMENTS</b> .....	<b>18</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE</b> .....	<b>19</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>20</b>
<b>7. TEST RESULT</b> .....	<b>21</b>
7.1. Summary .....	21
7.2. 26dB Bandwidth Measurement.....	22
7.2.1. Test Limit .....	22
7.2.2. Test Procedure used.....	22
7.2.3. Test Setting.....	22
7.2.4. Test Setup .....	22
7.2.5. Test Result.....	23
7.3. 6dB Bandwidth Measurement.....	35
7.3.1. Test Limit .....	35
7.3.2. Test Procedure used.....	35

---

7.3.3. Test Setting.....	35
7.3.4. Test Setup .....	35
7.3.5. TestResult.....	36
7.4. Output Power Measurement .....	41
7.4.1. Test Limit .....	41
7.4.2. Test Procedure Used .....	41
7.4.3. Test Setting.....	41
7.4.4. Test Setup .....	41
7.4.5. Test Result.....	42
7.5. Transmit Power Control .....	44
7.5.1. Test Limit .....	44
7.5.2. Test Procedure Used .....	44
7.5.3. Test Setting.....	44
7.5.4. Test Setup .....	44
7.5.5. Test Result.....	44
7.6. Power Spectral Density Measurement .....	45
7.6.1. Test Limit .....	45
7.6.2. Test Procedure Used .....	45
7.6.3. Test Setting.....	45
7.6.4. Test Setup .....	46
7.6.5. Test Result.....	47
7.7. Frequency Stability Measurement.....	78
7.7.1. Test Limit .....	78
7.7.2. Test Limit .....	78
7.7.3. Test Setup .....	79
7.7.4. Test Result.....	79
7.8. Radiated Spurious Emission Measurement .....	80
7.8.1. Test Limit .....	80
7.8.2. Test Procedure Used .....	80
7.8.3. Test Setting.....	80
7.8.4. Test Setup .....	82
7.8.5. Test Result.....	83
7.9. Radiated Restricted Band Edge Measurement .....	193
7.9.1. Test Limit .....	193
7.9.2. Test Procedure Used .....	194
7.9.3. Test Setting.....	194
7.9.4. Test Setup .....	195
7.9.5. Test Result.....	196
7.10. AC Conducted Emissions Measurement.....	302

7.10.1. Test Limit .....	302
7.10.2. Test Procedure .....	302
7.10.3. Test Setup .....	303
7.10.4. Test Result.....	304
<b>8. CONCLUSION.....</b>	<b>308</b>
<b>Appendix A : Test Setup Photograph .....</b>	<b>309</b>
<b>Appendix B : External Photograph .....</b>	<b>310</b>
<b>Appendix C : Internal Photograph .....</b>	<b>311</b>

## General Information

<b>Applicant</b>	TP-Link Corporation Limited
<b>Applicant Address</b>	Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong
<b>Manufacturer</b>	TP-Link Corporation Limited
<b>Manufacturer Address</b>	Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong
<b>Test Site</b>	MRT Technology (Taiwan) Co., Ltd
<b>Test Site Address</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
<b>MRT FCC Registration No.</b>	291082
<b>FCC Rule Part(s)</b>	Part 15.407
<b>Test Device Serial No.</b>	#1-1 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

## Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


# 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

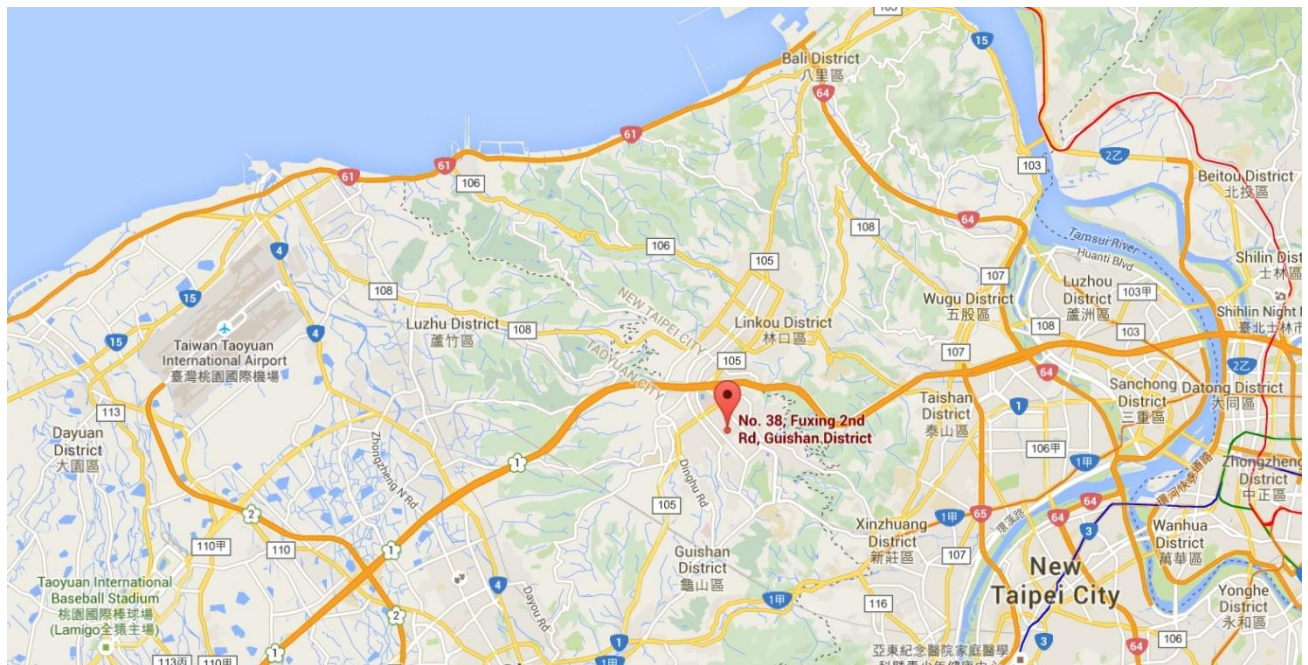

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	AX7800 Whole Home Mesh Wi-Fi 6 System
Model No.:	Deco X95
Brand Name:	tp-link
Wi-Fi Specification:	802.11a/b/g/n/ac/ax
EUT Identification No.:	20201206Sample#04 (Conducted) 20201206Sample#14 (Radiated)
Adapter	MODEL: T120250-2B4 INPUT: 100 - 240V ~ 50/60Hz 0.8A. OUTPUT: DC 12.0V 2.5A

### 2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5500~5640MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5510~5630MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5530MHz, 5610 MHz, 5775MHz For 802.11ac-VHT160/ax-HE160: 5250MHz, 5570MHz
Type of Modulation:	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 600Mbps 802.11ac: up to 3466.7Mbps 802.11ax: up to 4804Mbps

Note: For other features of this EUT, test report will be issued separately.



### 2.3. Working Frequencies for this report

#### 802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	100	5500 MHz	104	5520 MHz
108	5540 MHz	112	5560 MHz	116	5580 MHz
120	5600 MHz	124	5620 MHz	128	5640 MHz
149	5745 MHz	153	5765 MHz	157	5785 MHz
161	5805 MHz	165	5825 MHz	--	--

#### 802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	102	5510 MHz
110	5550MHz	118	5590 MHz	126	5630 MHz
151	5755 MHz	159	5795 MHz	--	--

#### 802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	106	5530 MHz	122	5610 MHz
155	5775 MHz	--	--	--	--

#### 802.11ac-VHT160/ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250MHz	114	5570 MHz	--	--

## 2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	T <sub>x</sub> Paths	Max Antenna Gain (dBi)	CDD Directional Gain (dBi)	
				For Power	For PSD
Dipole Antenna	2412 ~ 2462	2	2.0	2.0	5.01
	5150 ~ 5350	4	1.0	1.0	7.02
	5470 ~ 5850	2	1.0	1.0	4.01

Note:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, GANT, Directional gain = GANT + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB;

- For power measurements on IEEE 802.11 devices,


Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;

## 2.5. Test Mode

CDD mode
Mode 1: Transmit by 802.11a_N <sub>SS</sub> =1(6Mbps)
Mode 2: Transmit by 802.11ac-VHT20_N <sub>SS</sub> =1 (MCS0)
Mode 3: Transmit by 802.11ac-VHT40_N <sub>SS</sub> =1 (MCS0)
Mode 4: Transmit by 802.11ac-VHT80_N <sub>SS</sub> =1 (MCS0)
Mode 5: Transmit by 802.11ac-VHT160_N <sub>SS</sub> =1 (MCS0)
Mode 6: Transmit by 802.11ax-HE20_N <sub>SS</sub> =1 (MCS0)
Mode 7: Transmit by 802.11ax-HE40_N <sub>SS</sub> =1 (MCS0)
Mode 8: Transmit by 802.11ax-HE80_N <sub>SS</sub> =1 (MCS0)
Mode 9: Transmit by 802.11ax-HE160_N <sub>SS</sub> =1 (MCS0)
Remark: <ol style="list-style-type: none"><li>1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.</li><li>2. For CDD mode, this device supports 4 N<sub>SS</sub> at NII-1/-2a bands and 2 N<sub>SS</sub> at NII-2c/-3 bands and power level is the same of spatial multiplexing. The worst case is N<sub>SS</sub>=1.</li><li>3. Due to the same modulation between 802.11n and 802.11ac, so 802.11n-HT20 and HT40 are covered by 802.11ac-VHT20 and VHT40 in this report, meanwhile, power level for 802.11n-HT20 and HT40 will not be greater than 802.11ac-VHT20 and VHT40.</li><li>4. EUT supports one configuration only in 802.11ax full RU mode.</li></ol>

## 2.6. Configuration of Test System

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

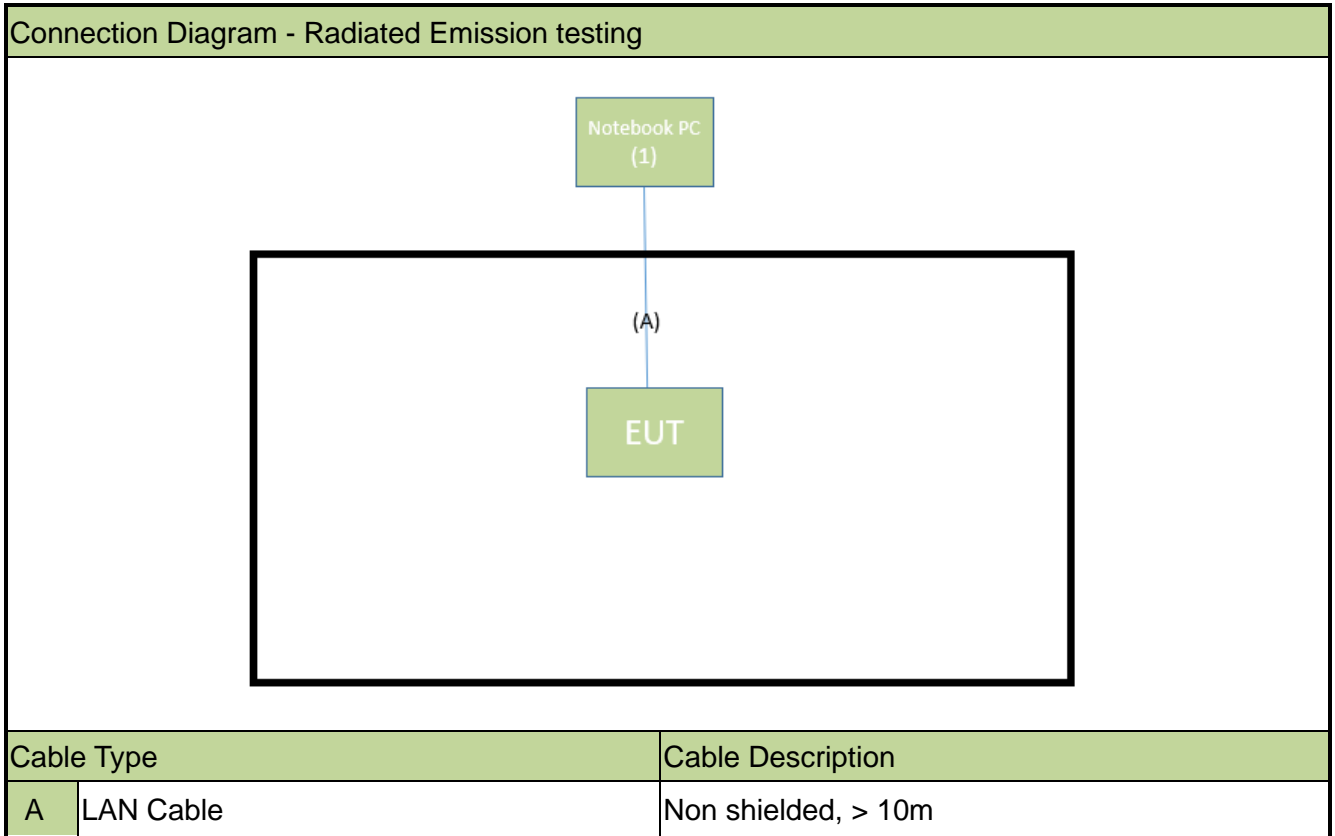

## 2.7. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	T450	N/A	Non-Shielded, 0.8m

## 2.8. Description of Test Software

The test utility software used during testing was “accessMTool”, the version is ver3.2.1.2.

Note: Final power setting please refer to operational description.

## 2.9. Applied Standards


According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 789033 D02v02r01,
- KDB 662911 D01v02r01
- ANSI C63.10-2013

## 2.10. Duty Cycle


5GHz (NII) operation is possible in 20MHz, 40MHz, 80MHz and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 10MHz, VBW = 10MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11a	95.48%
802.11ac-VHT20	98.84%
802.11ac-VHT40	98.20%
802.11ac-VHT80	97.42%
802.11ac-VHT160	96.88%
802.11ax-HE20	94.68%
802.11ax-HE40	94.03%
802.11ax-HE80	90.45%
802.11ax-HE160	90.26%

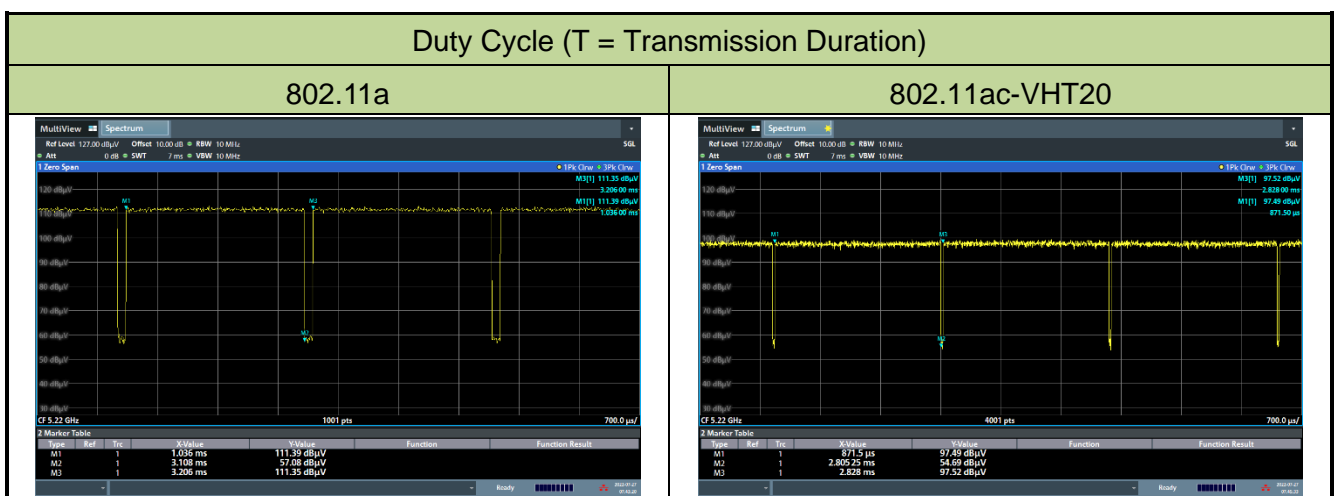


## Duty Cycle (T = Transmission Duration)

802.11ac-VHT40

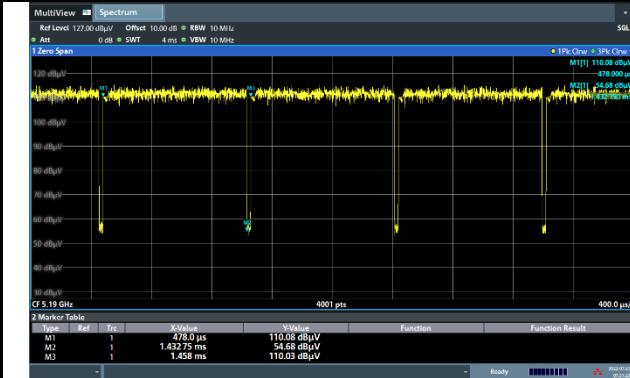


802.11ac-VHT80

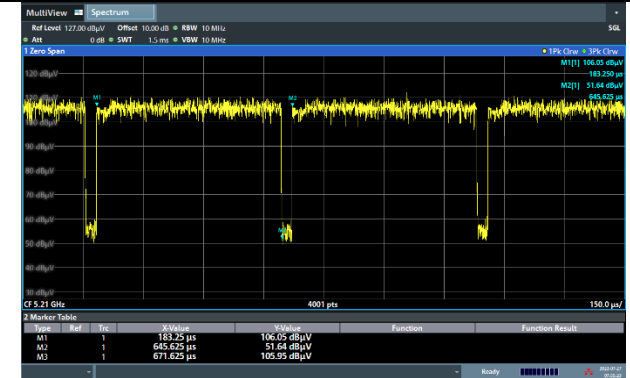


802.11ac-VHT160




802.11ax-HE20

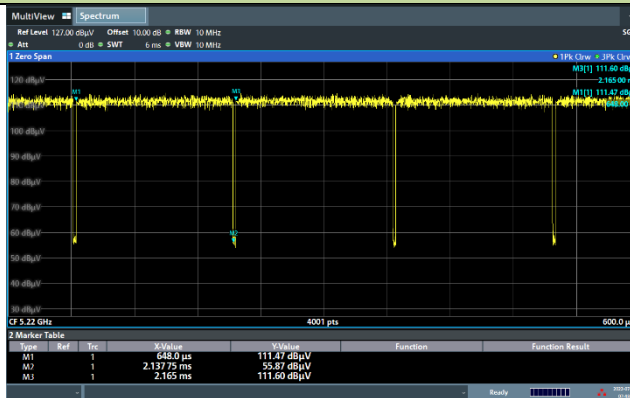


802.11ax-HE40

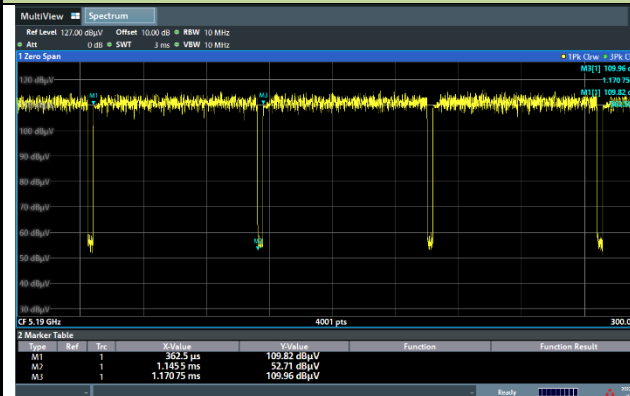

802.11ax-HE80

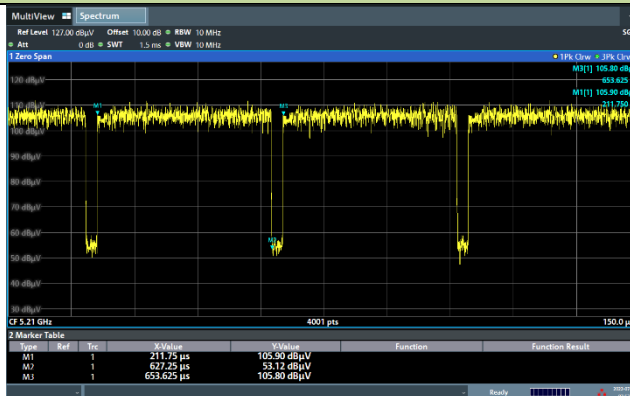

802.11ax-HE160

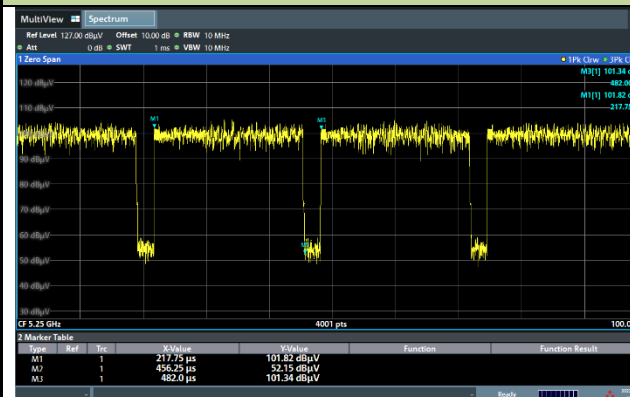

## 2.11. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.12. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.13. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### **3. DESCRIPTION OF TEST**

#### **3.1. Evaluation Procedure**

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

#### **3.2. AC Line Conducted Emissions**

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.



### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2023/3/7
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2023/4/20
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2023/5/9
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00050	1 year	2023/6/5

### Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2022/10/4
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2023/5/24
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2023/3/30
BreitbandHornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2023/3/29
Broadband Preampfier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2023/3/30
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2023/3/30
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2023/3/16
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2023/3/9
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2022/10/18
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2023/7/19
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2023/6/14
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2023/6/15

### Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2023/4/20
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2022/10/18
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2023/7/19
Attenuator	WTI	218FS-20	MRTTWE00026	1 year	2022/11/18
Attenuator	WTI	218FS-10	MRTTWE00027	1 year	2023/6/15
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2023/6/14
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2023/6/16

Software	Version	Function
e3	9.160520a	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: $\pm 2.53\text{dB}$
<b>Radiated Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: $\pm 4.25\text{dB}$ 1GHz ~ 40GHz: $\pm 4.45\text{dB}$
<b>Conducted Power (Carrier Power / Power Density)</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.84\text{dB}$
<b>Conducted Spurious Emission</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 2.65\text{ dB}$
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 3.3\%$
<b>Temp. / Humidity</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.82^\circ\text{C} / \pm 3\%$
<b>Frequency Error</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 78.4\text{Hz}$

## 7. TEST RESULT

### 7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to section 7.4		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	$\leq 24 \text{ dBm}$		Pass	Section 7.5
15.407(a)(1)(ii), (2), (3), (12)	Peak Power Spectral Density	Refer to section 7.6		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

## 7.2. 26dB Bandwidth Measurement

### 7.2.1. Test Limit

N/A


### 7.2.2. Test Procedure used

KDB 789033 D02v02r01- Section II) C.1

### 7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.

### 7.2.4. Test Setup

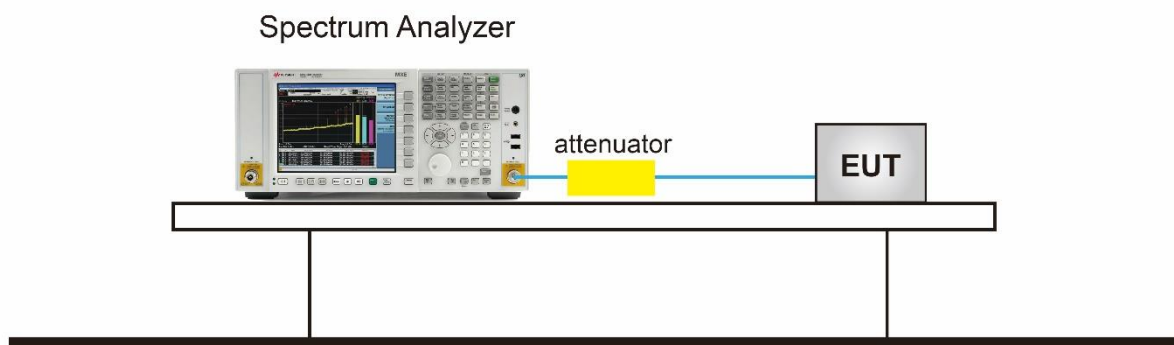

### 7.2.5. Test Result

Product	AX7800 Whole Home Mesh Wi-Fi 6 System	Test Engineer	Jay
Test Site	SR5	Test Date	2022/8/22

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1					
802.11a	6Mbps	36	5180	21.580	16.840
802.11a	6Mbps	44	5220	21.480	16.642
802.11a	6Mbps	48	5240	21.140	16.661
802.11a	6Mbps	100	5500	20.700	16.582
802.11a	6Mbps	116	5580	20.610	16.588
802.11a	6Mbps	128	5640	20.750	16.570
802.11a	6Mbps	149	5745	37.260	19.214
802.11a	6Mbps	157	5785	39.490	23.314
802.11a	6Mbps	165	5825	39.480	26.252
802.11ac-VHT20	MCS0	36	5180	22.610	17.972
802.11ac-VHT20	MCS0	44	5220	24.780	17.835
802.11ac-VHT20	MCS0	48	5240	21.870	17.796
802.11ac-VHT20	MCS0	100	5500	21.310	17.780
802.11ac-VHT20	MCS0	116	5580	21.020	17.760
802.11ac-VHT20	MCS0	128	5640	20.920	17.752
802.11ac-VHT20	MCS0	149	5745	36.200	19.687
802.11ac-VHT20	MCS0	157	5785	38.860	24.299
802.11ac-VHT20	MCS0	165	5825	39.840	25.572
802.11ac-VHT40	MCS0	38	5190	50.200	36.378
802.11ac-VHT40	MCS0	46	5230	69.310	36.632
802.11ac-VHT40	MCS0	102	5510	39.220	36.260
802.11ac-VHT40	MCS0	110	5550	39.280	36.226
802.11ac-VHT40	MCS0	126	5630	39.040	36.276
802.11ac-VHT40	MCS0	151	5755	71.570	37.108
802.11ac-VHT40	MCS0	159	5795	79.900	51.124
802.11ac-VHT80	MCS0	42	5210	85.570	76.109
802.11ac-VHT80	MCS0	106	5530	79.680	75.744
802.11ac-VHT80	MCS0	122	5610	80.460	75.933
802.11ac-VHT80	MCS0	155	5775	83.300	75.979




Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1					
802.11ac-VHT160	MCS0	50	5250	160.800	154.410
802.11ac-VHT160	MCS0	114	5570	161.000	154.630
802.11ax-HE20	MCS0	36	5180	22.240	19.073
802.11ax-HE20	MCS0	44	5220	23.970	19.030
802.11ax-HE20	MCS0	48	5240	21.340	19.051
802.11ax-HE20	MCS0	100	5500	21.150	19.059
802.11ax-HE20	MCS0	116	5580	20.990	19.000
802.11ax-HE20	MCS0	128	5640	21.080	19.027
802.11ax-HE20	MCS0	149	5745	38.140	20.554
802.11ax-HE20	MCS0	157	5785	39.990	25.254
802.11ax-HE20	MCS0	165	5825	40.000	27.918
802.11ax-HE40	MCS0	38	5190	41.350	37.781
802.11ax-HE40	MCS0	46	5230	70.200	37.960
802.11ax-HE40	MCS0	102	5510	39.260	37.600
802.11ax-HE40	MCS0	110	5550	39.210	37.471
802.11ax-HE40	MCS0	126	5630	39.160	37.523
802.11ax-HE40	MCS0	151	5755	69.620	37.927
802.11ax-HE40	MCS0	159	5795	78.590	41.575
802.11ax-HE80	MCS0	42	5210	84.960	77.342
802.11ax-HE80	MCS0	106	5530	79.970	76.914
802.11ax-HE80	MCS0	122	5610	80.410	77.052
802.11ax-HE80	MCS0	155	5775	79.790	77.040
802.11ax-HE160	MCS0	50	5250	163.000	156.340
802.11ax-HE160	MCS0	114	5570	161.700	155.090




80.211a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

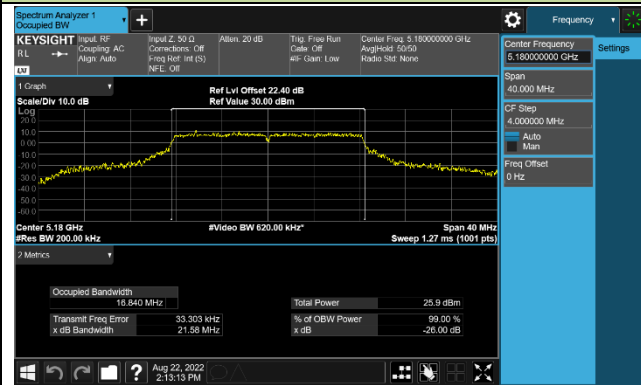


Channel 44 (5220MHz)

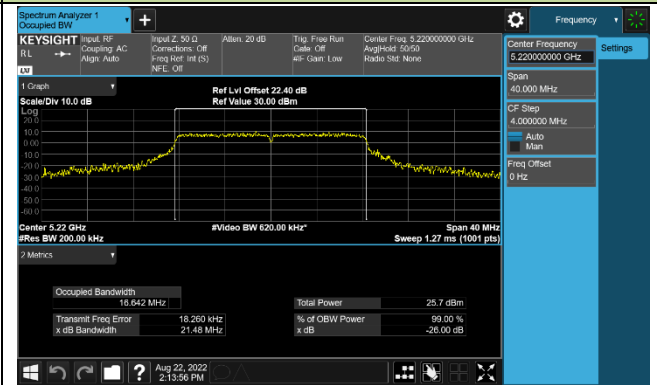


Channel 48 (5240MHz)

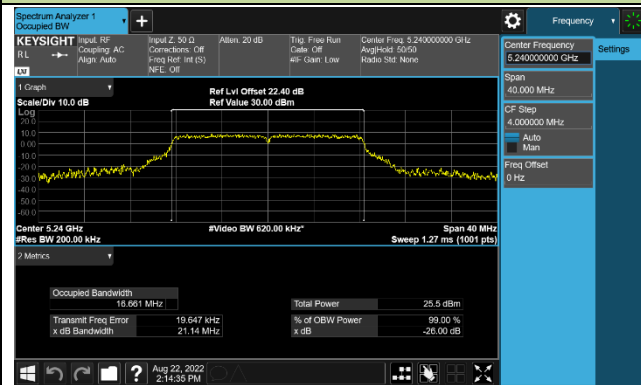


Channel 100 (5500MHz)

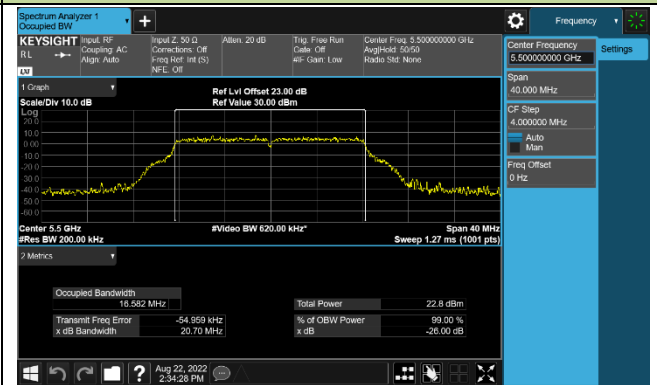


Channel 116 (5580MHz)

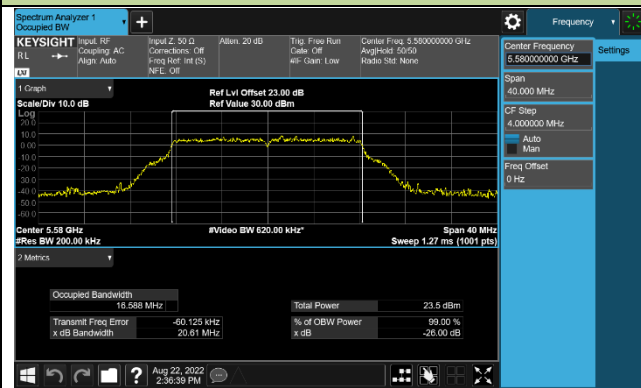


Channel 128 (5640MHz)

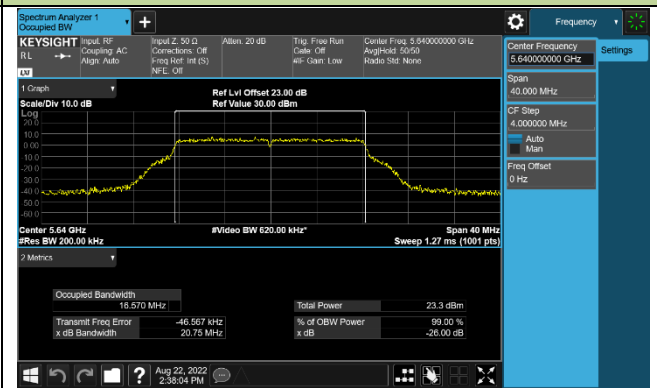


Channel 149 (5745MHz)

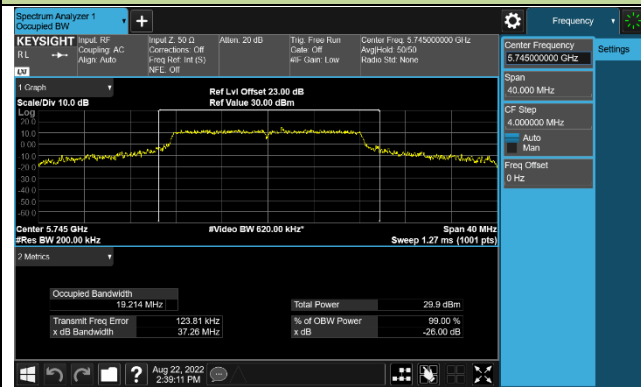


Channel 157 (5785MHz)

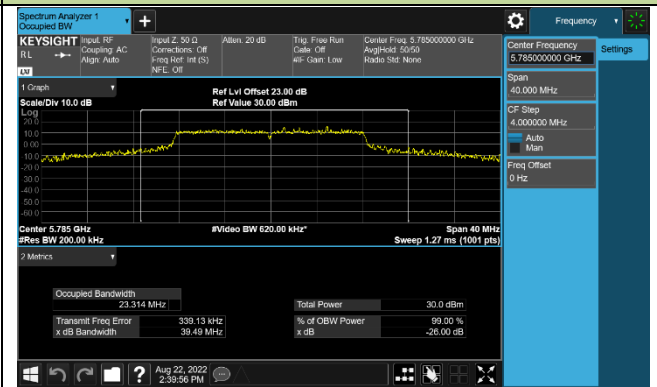

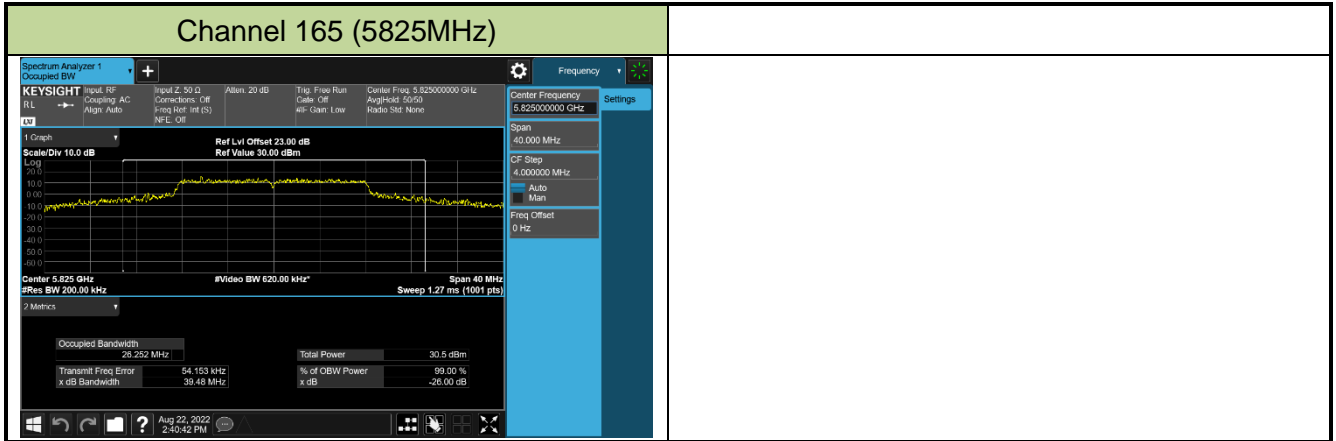


### 802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

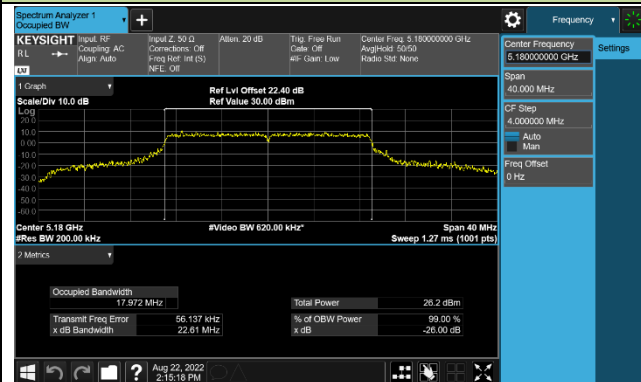


Channel 44 (5220MHz)

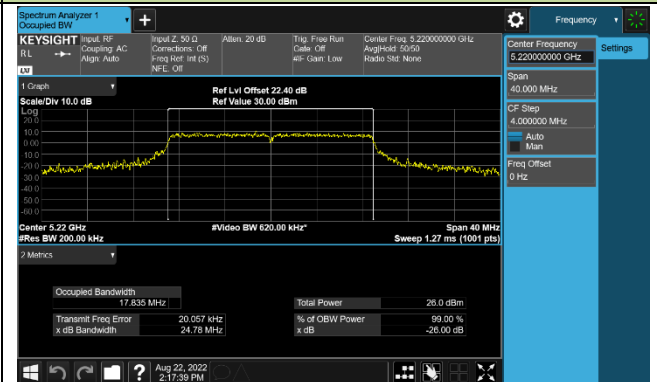


Channel 48 (5240MHz)

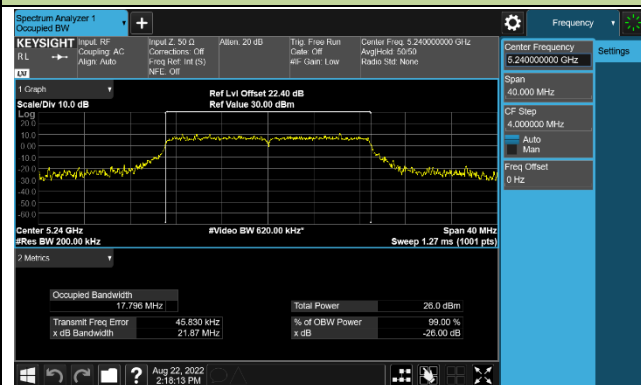


Channel 100 (5500MHz)

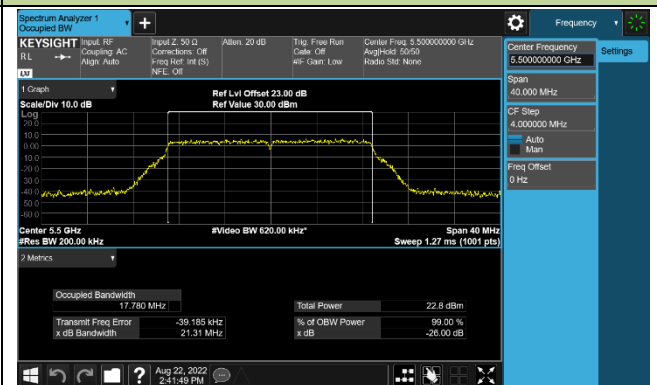


Channel 116 (5580MHz)

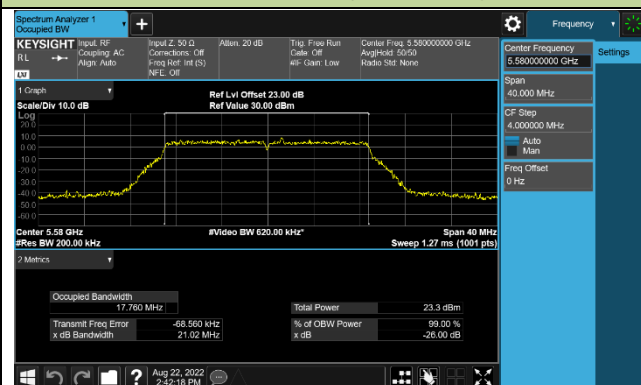


Channel 128 (5640MHz)

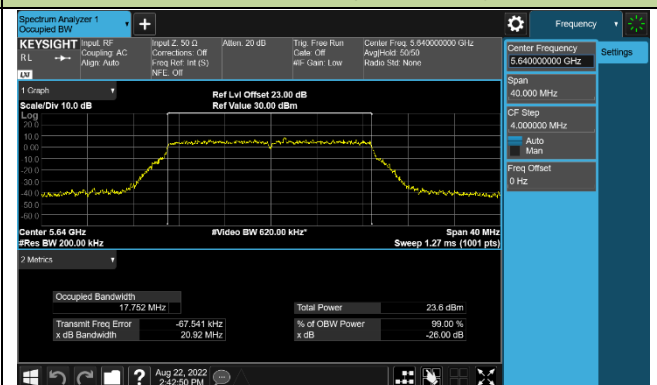


Channel 149 (5745MHz)

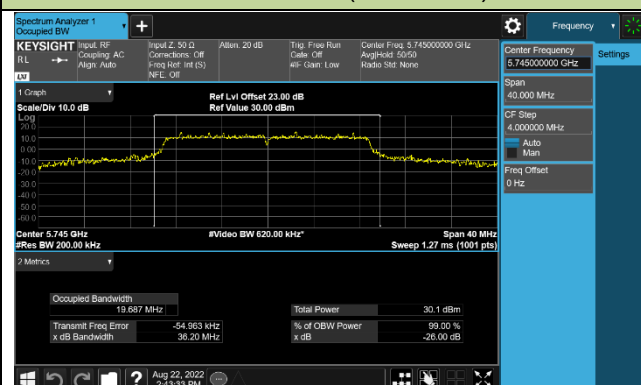


Channel 157 (5785MHz)

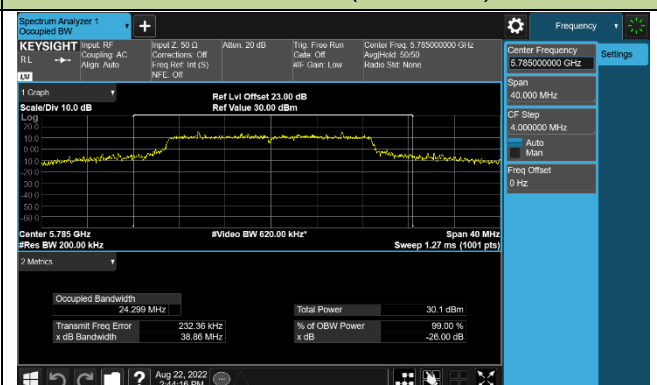

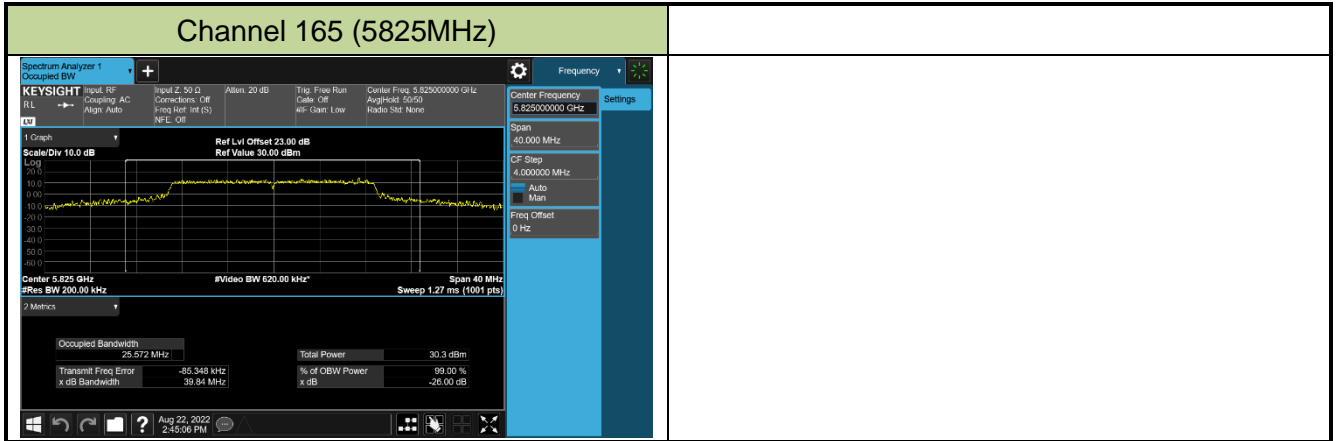


### 802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth


#### Channel 38 (5190MHz)

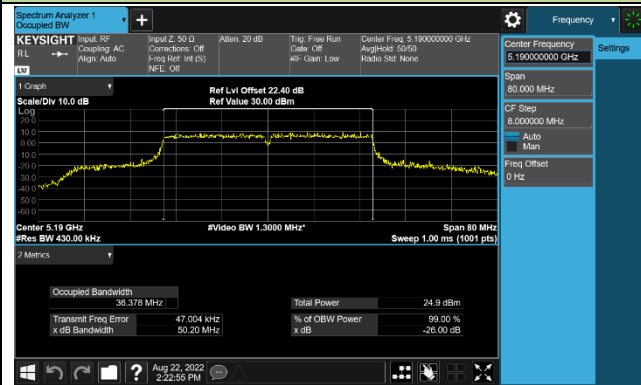


#### Channel 46 (5230MHz)

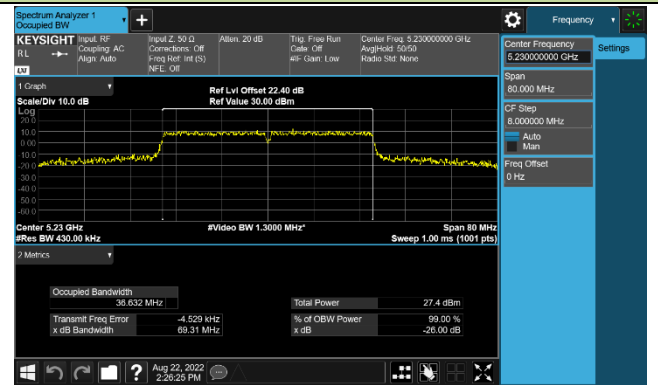


#### Channel 102 (5510MHz)

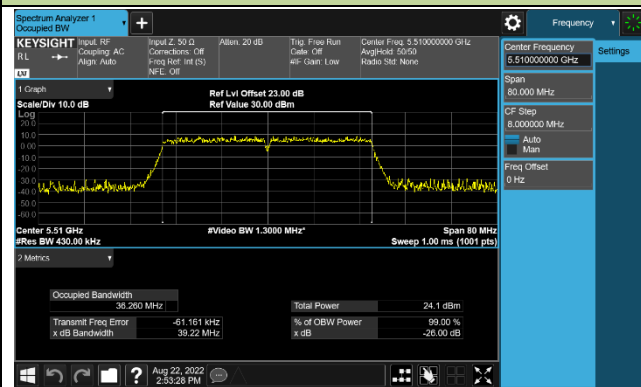


#### Channel 110 (5550MHz)

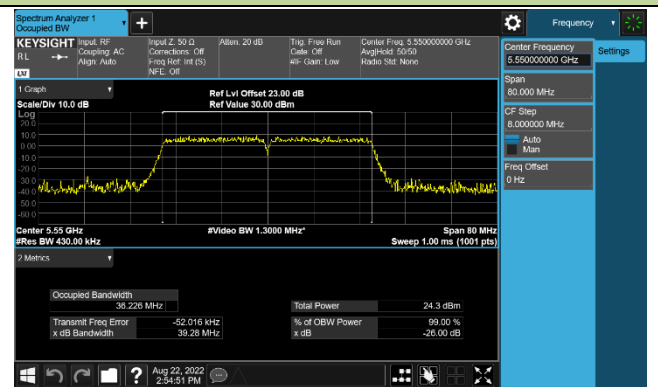


#### Channel 126 (5630MHz)

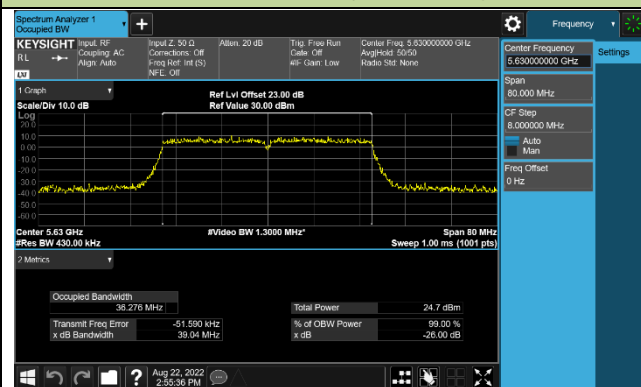

#### Channel 151 (5755MHz)

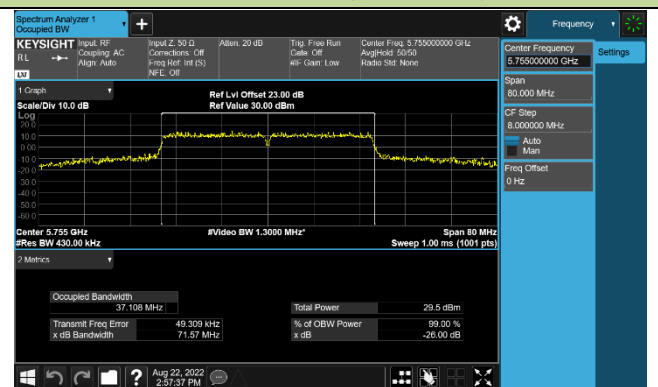


#### Channel 159 (5795MHz)

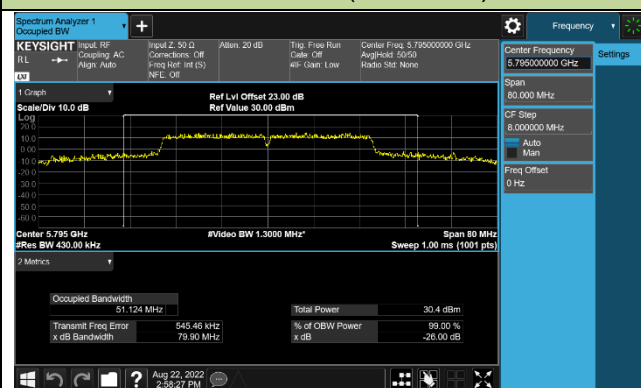


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

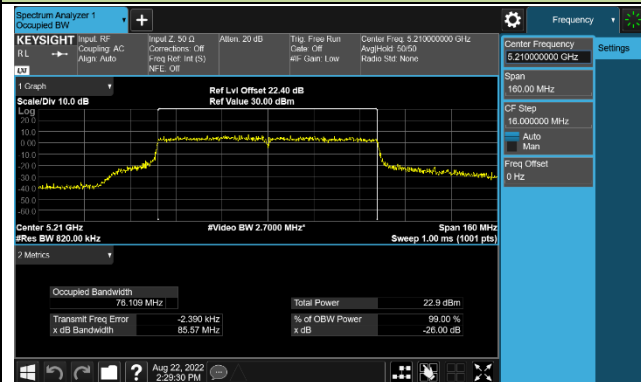


Channel 106 (5530MHz)

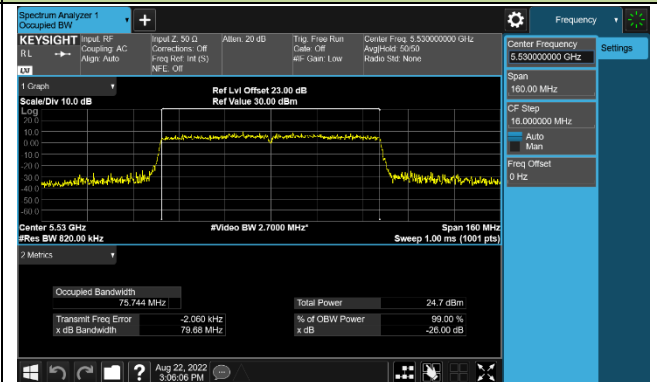

Channel 122 (5610MHz)

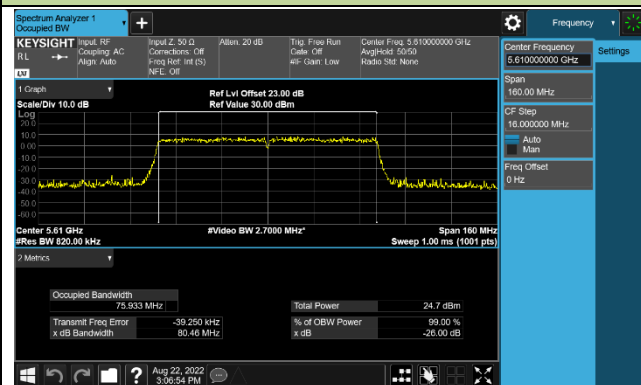


Channel 155 (5775MHz)

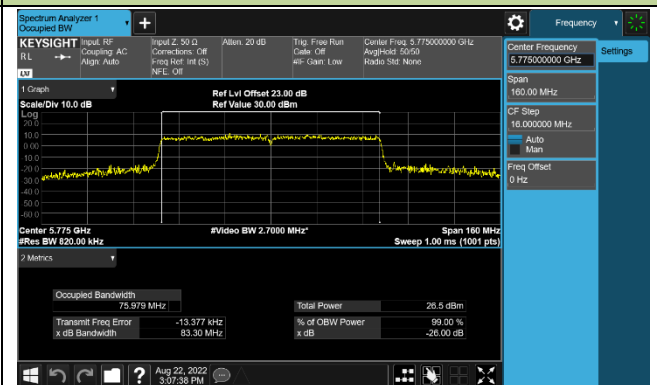


802.11ac-VHT160 26dB Bandwidth & 99% Bandwidth

Channel 50 (5250MHz)

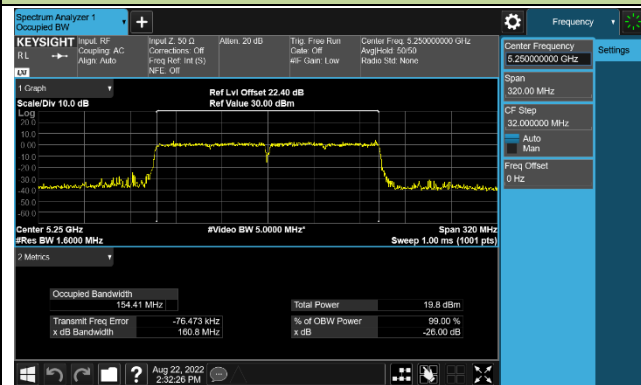


Channel 114 (5570MHz)

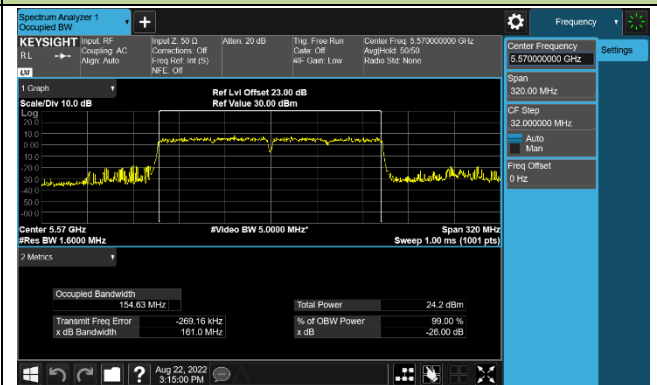


## 802.11ax-HE20 26dB Bandwidth &amp; 99% Bandwidth


Channel 36 (5180MHz)

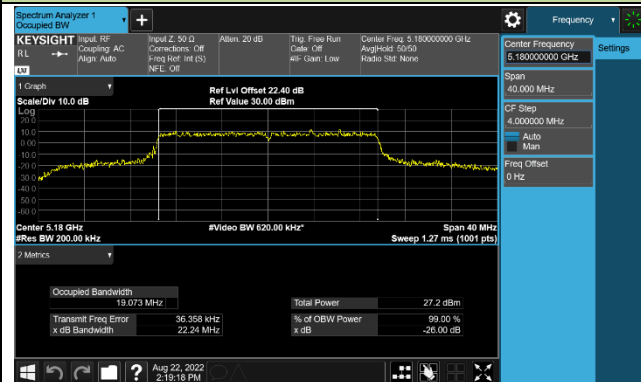


Channel 44 (5220MHz)

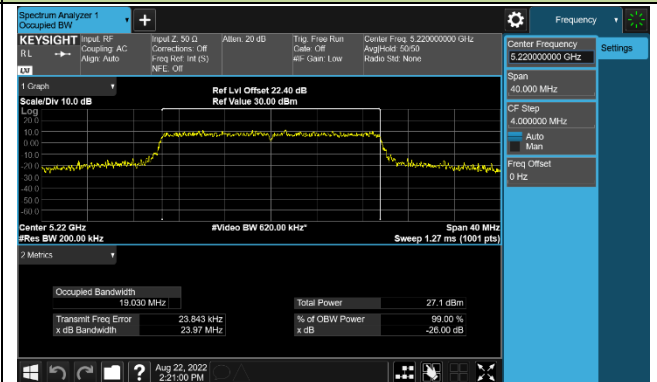


Channel 48 (5240MHz)

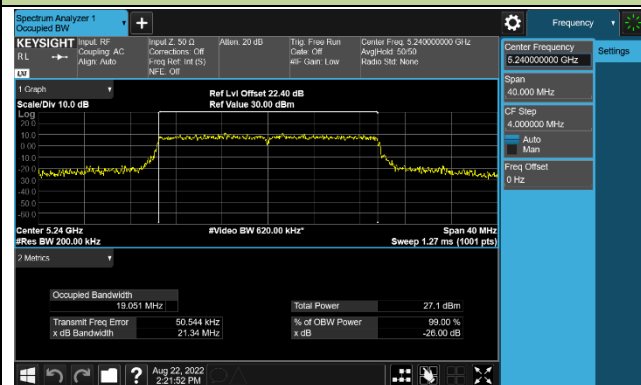


Channel 100 (5500MHz)

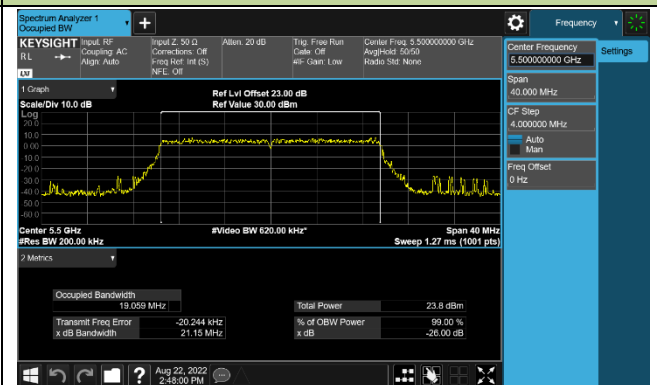


Channel 116 (5580MHz)

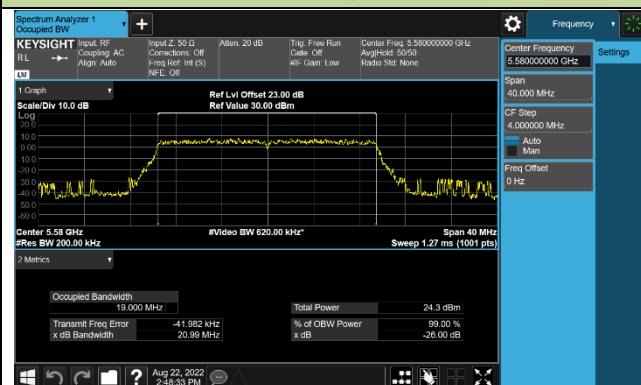


Channel 128 (5640MHz)

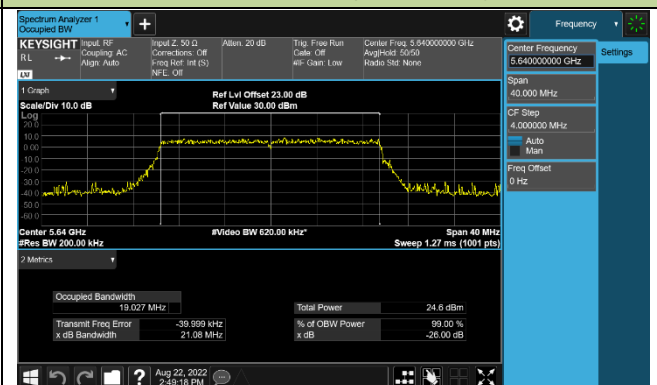


Channel 149 (5745MHz)

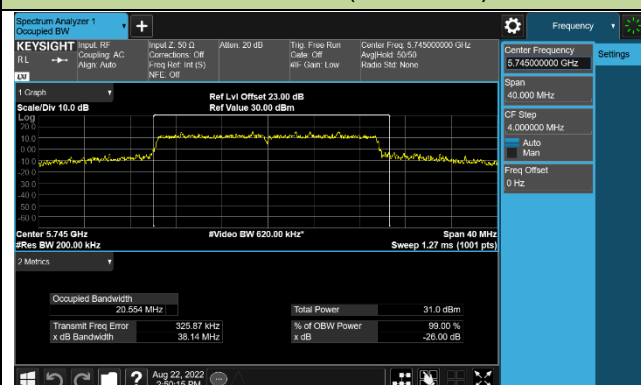

Channel 157 (5785MHz)

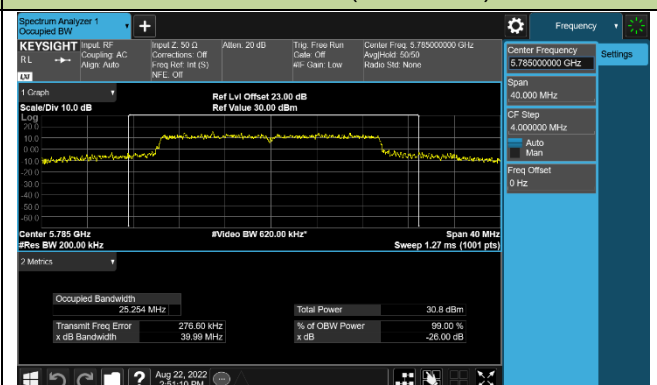


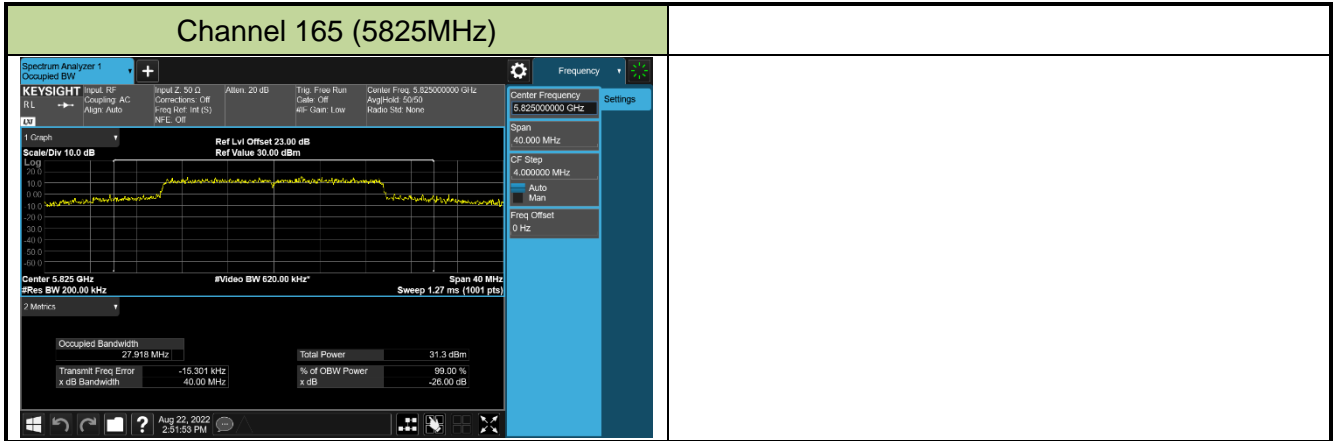




802.11ax-HE40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

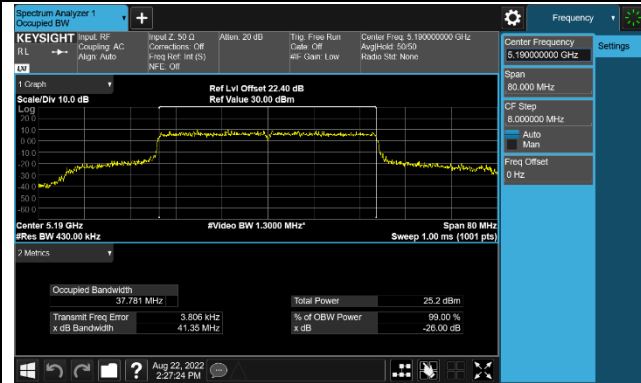


Channel 46 (5230MHz)

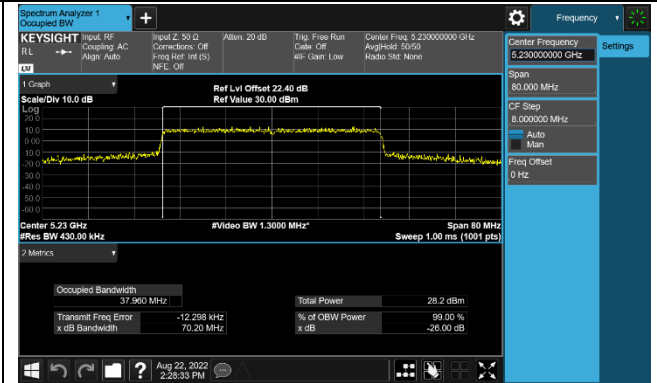


Channel 102 (5510MHz)

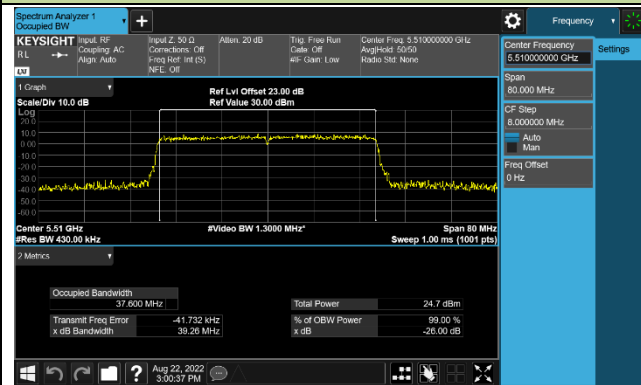


Channel 110 (5550MHz)

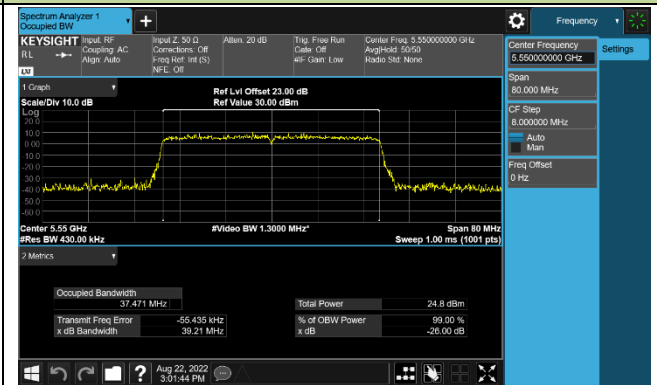


Channel 126 (5630MHz)

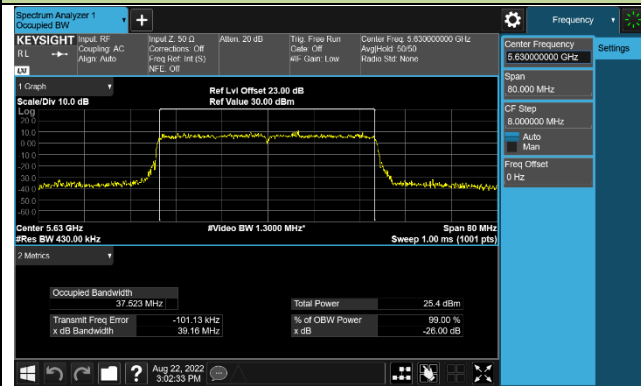

Channel 151 (5755MHz)

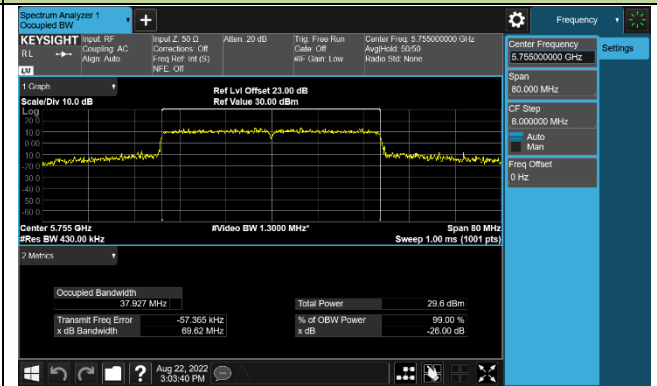


Channel 159 (5795MHz)

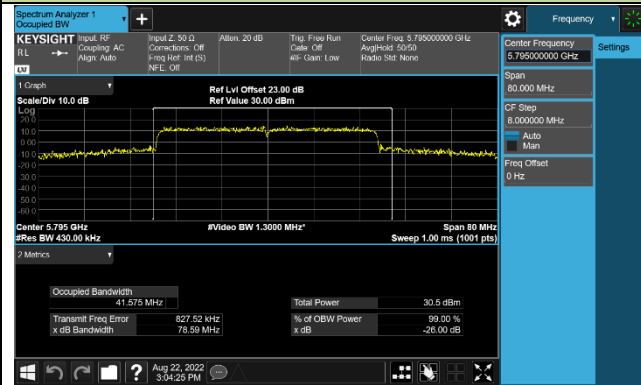


802.11ax-HE80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

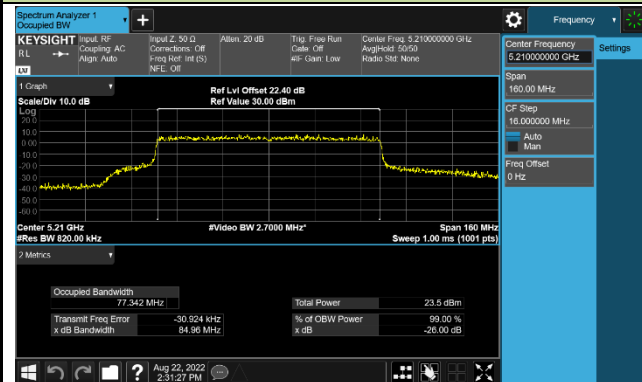


Channel 106 (5530MHz)

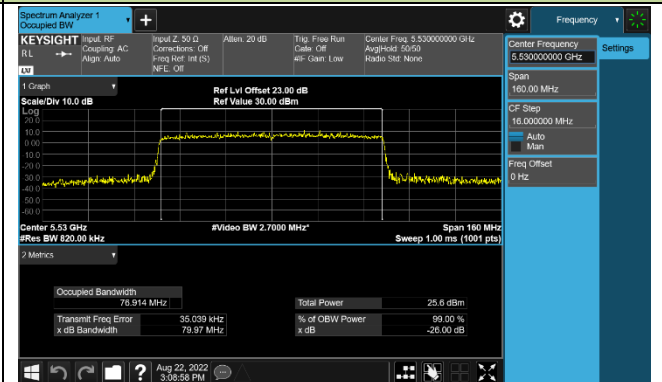

Channel 122 (5610MHz)

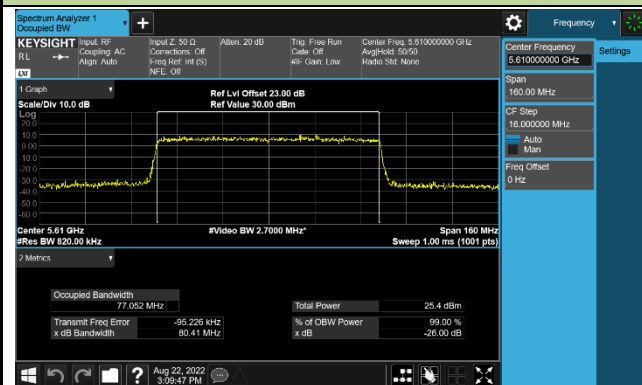


Channel 155 (5775MHz)

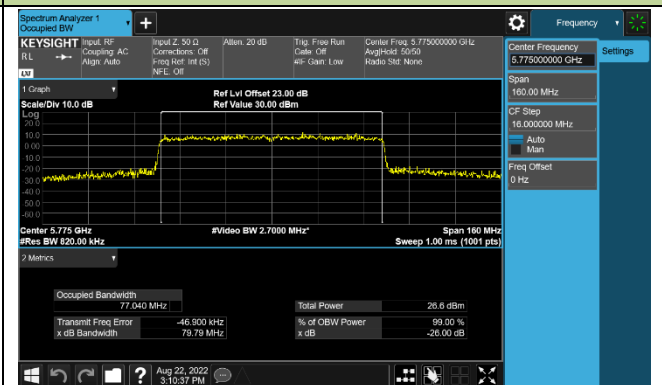


802.11ax-HE160 26dB Bandwidth & 99% Bandwidth

Channel 50 (5250MHz)

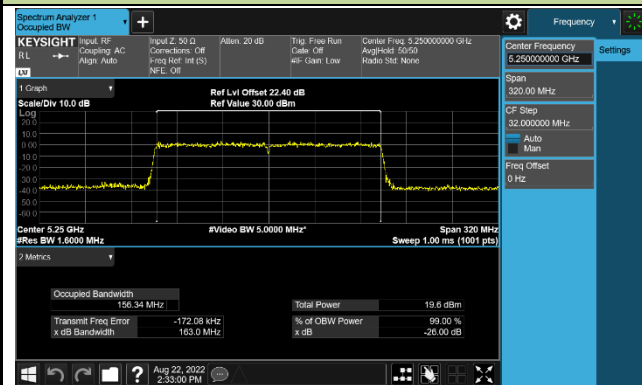

Channel 114 (5570MHz)

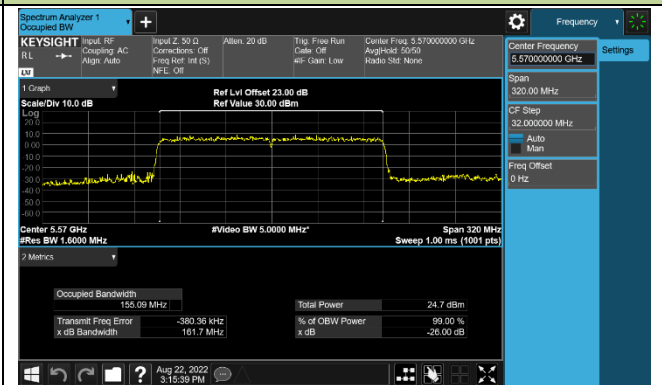

## 7.3. 6dB Bandwidth Measurement

### 7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.3.2. Test Procedure used

KDB 789033 D02v02r01- Section II) C.2

### 7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW  $3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.3.4. Test Setup

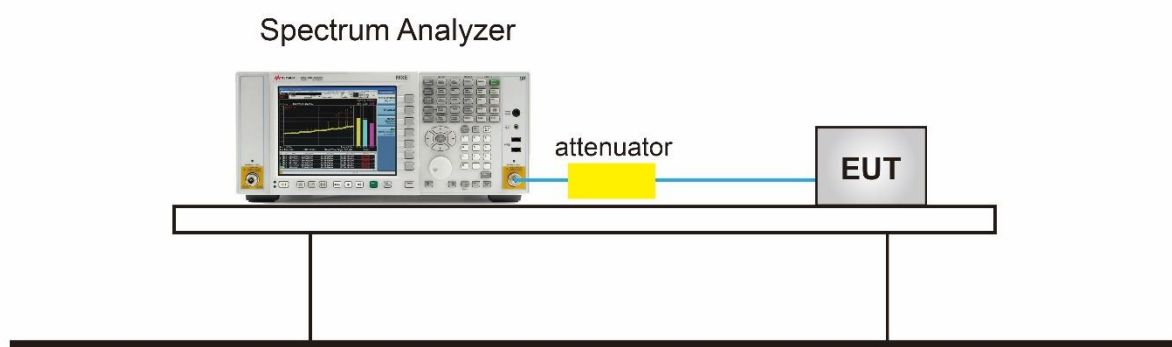


### 7.3.5.TestResult

Product	AX7800 Whole Home Mesh Wi-Fi 6 System	Test Engineer	Jay
Test Site	SR5	Test Date	2022/8/22


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 1						
802.11a	6Mbps	149	5745	16.350	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.380	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.320	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.590	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.540	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.620	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	18.070	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	18.580	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	18.650	≥ 0.5	Pass
802.11ax-HE20	MCS0	149	5745	36.430	≥ 0.5	Pass
802.11ax-HE20	MCS0	157	5785	36.420	≥ 0.5	Pass
802.11ax-HE20	MCS0	165	5825	25.480	≥ 0.5	Pass
802.11ax-HE40	MCS0	151	5755	35.670	≥ 0.5	Pass
802.11ax-HE40	MCS0	159	5795	76.420	≥ 0.5	Pass
802.11ax-HE80	MCS0	155	5775	75.790	≥ 0.5	Pass

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

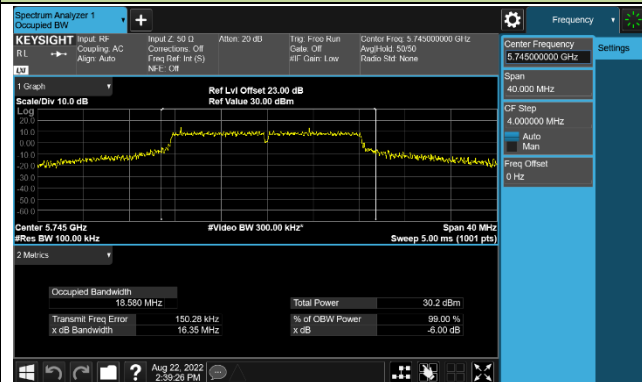

Channel 157 (5785MHz)

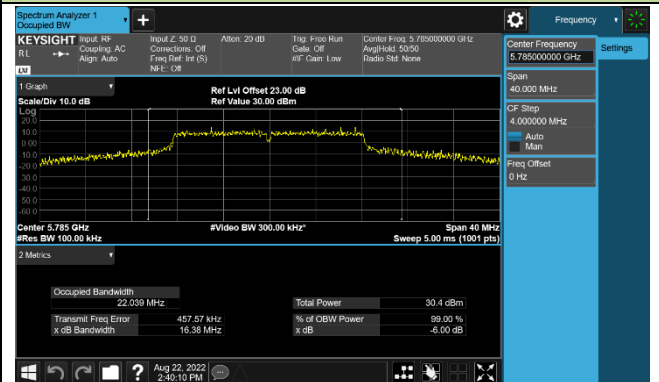


Channel 165 (5825MHz)

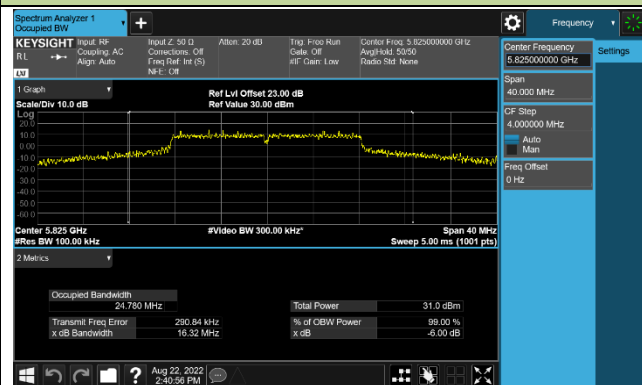


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

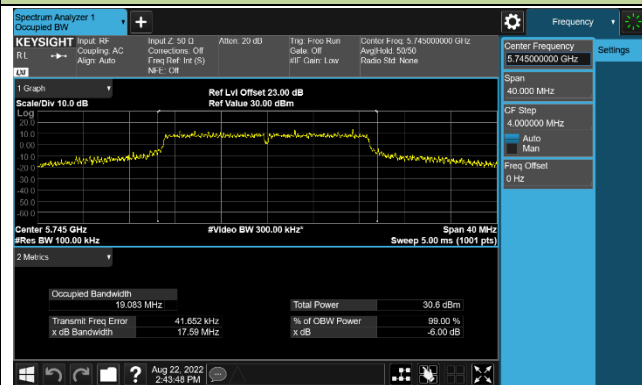


Channel 157 (5785MHz)

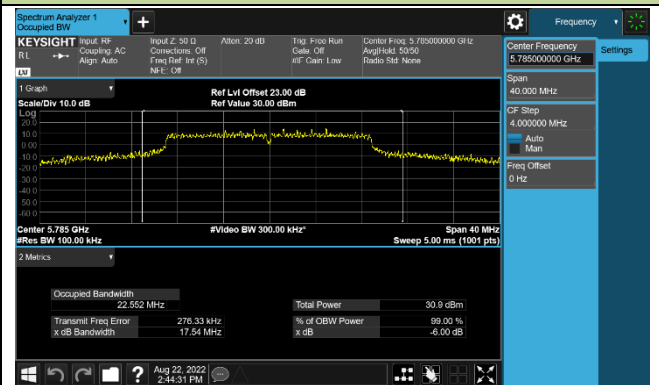


Channel 165 (5825MHz)

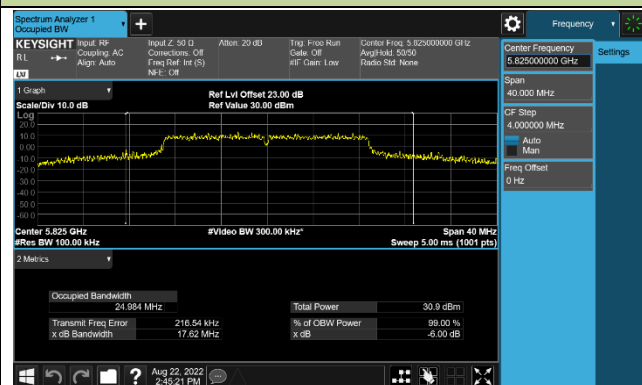

802.11ac-VHT40 6dB Bandwidth

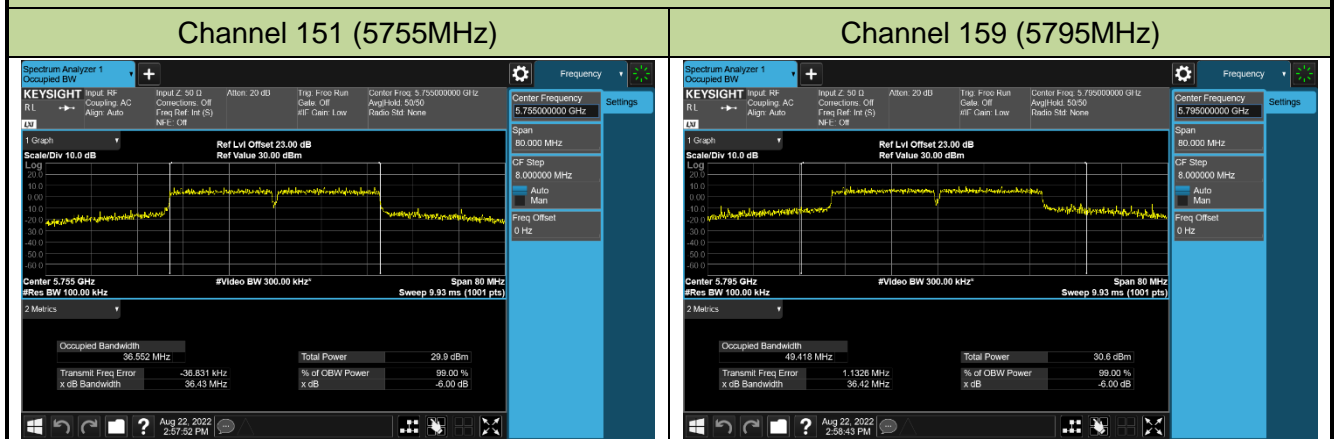


802.11ac-VHT80 6dB Bandwidth

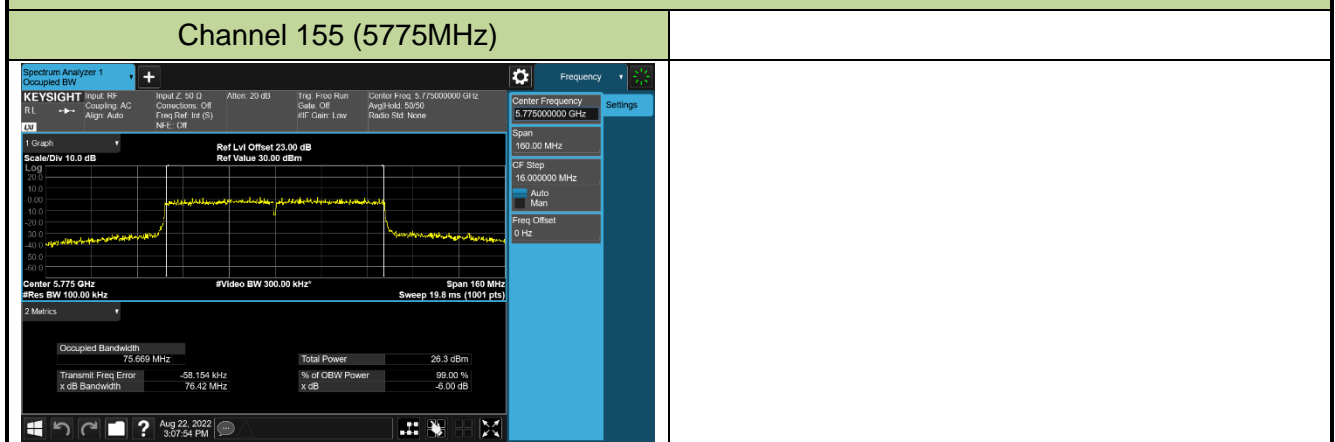


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

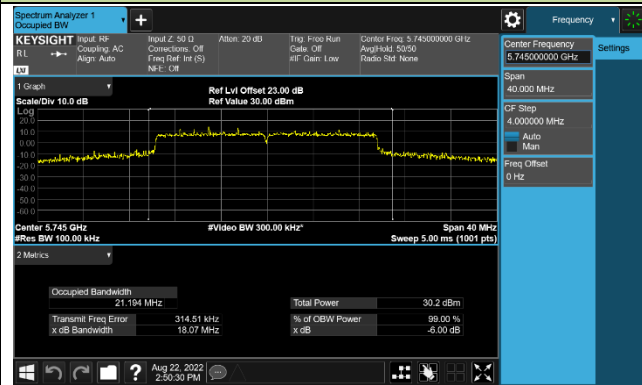

Channel 157 (5785MHz)

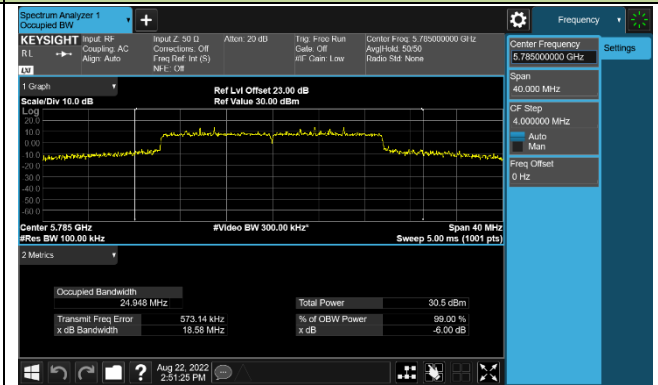


Channel 165 (5825MHz)

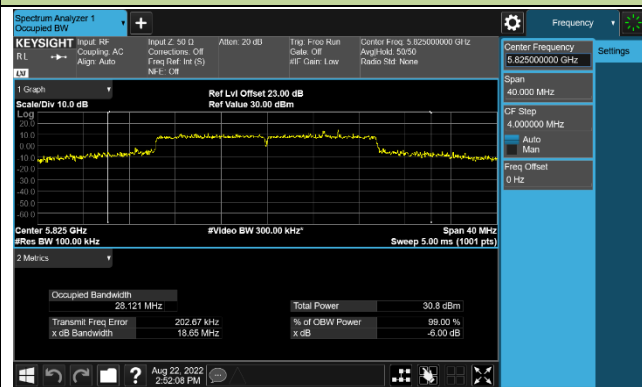



802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

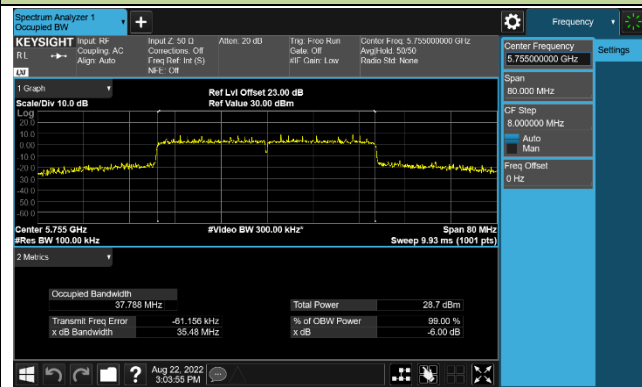

Channel 159 (5795MHz)

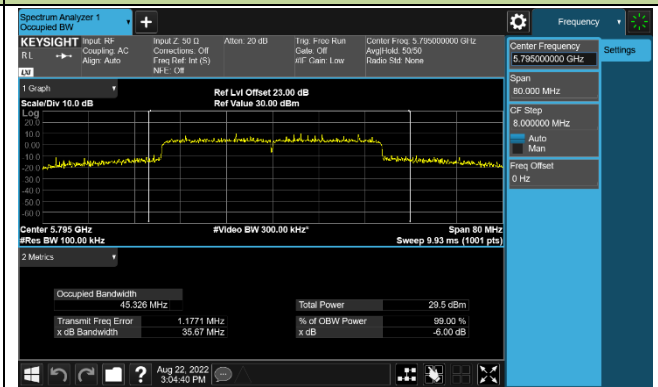

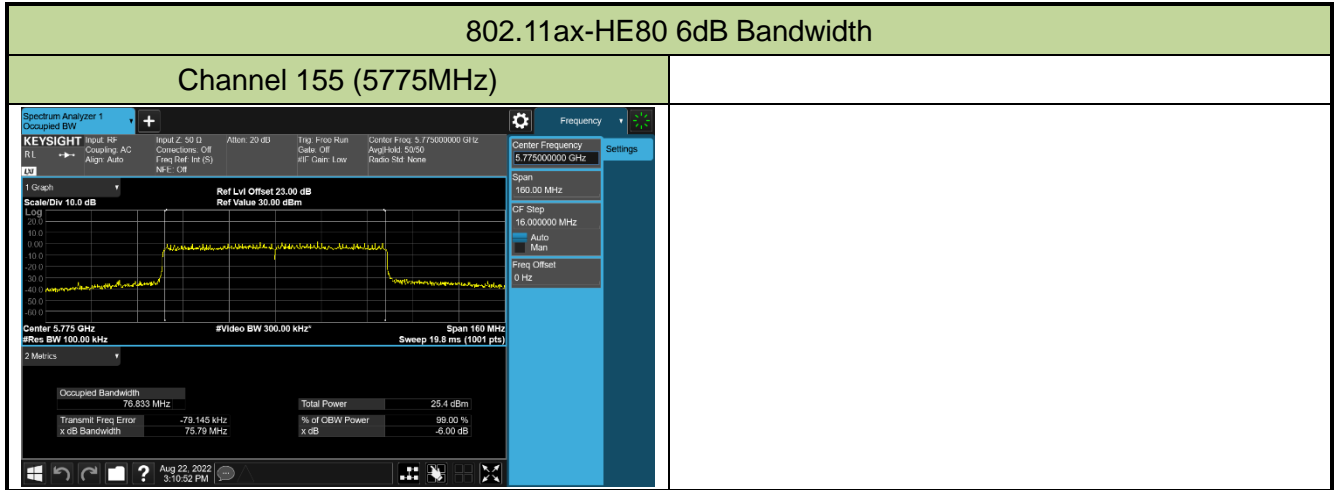



## 7.4. Output Power Measurement

### 7.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### 7.4.2. Test Procedure Used

KDB 789033D02v02r01- Section E)3)b) Method PM-G

### 7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 7.4.4. Test Setup

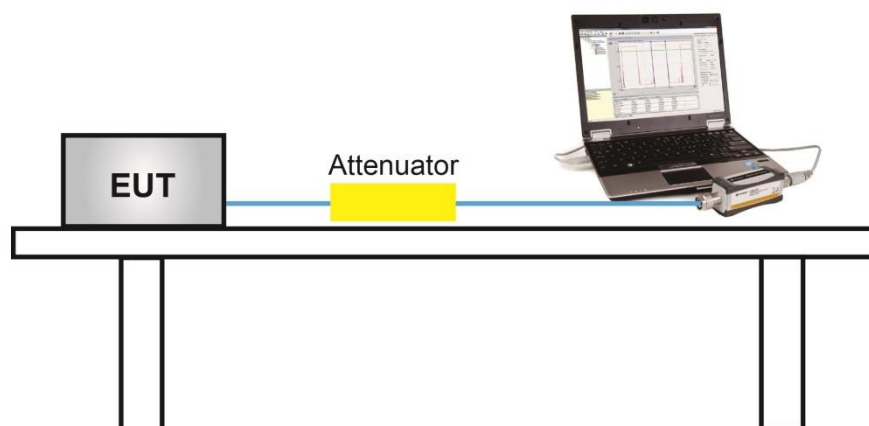

### 7.4.5. Test Result

Product	AX7800 Whole Home Mesh Wi-Fi 6 System	Test Engineer	Jay
Test Site	SR5	Test Date	2022/8/15~2022/8/17
Test Mode	CDD Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	21.77	21.58	21.30	22.03	27.70	≤ 30.00	Pass
11a	6Mbps	44	5220	21.33	21.46	21.29	22.26	27.62	≤ 30.00	Pass
11a	6Mbps	48	5240	21.18	21.09	21.01	22.01	27.36	≤ 30.00	Pass
11a	6Mbps	100	5500	19.30	19.22	--	--	22.27	≤ 23.98	Pass
11a	6Mbps	116	5580	19.43	19.63	--	--	22.54	≤ 23.98	Pass
11a	6Mbps	128	5640	19.38	19.33	--	--	22.37	≤ 23.98	Pass
11a	6Mbps	149	5745	26.26	26.06	--	--	29.17	≤ 30.00	Pass
11a	6Mbps	157	5785	26.42	26.06	--	--	29.25	≤ 30.00	Pass
11a	6Mbps	165	5825	26.77	26.06	--	--	29.44	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	21.57	21.82	21.59	22.67	27.96	≤ 30.00	Pass
11ac-VHT20	MCS0	40	5220	21.75	21.56	21.49	22.48	27.86	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	21.43	21.20	21.19	22.12	27.52	≤ 30.00	Pass
11ac-VHT20	MCS0	100	5500	19.95	19.35	--	--	22.67	≤ 23.98	Pass
11ac-VHT20	MCS0	116	5580	19.95	19.90	--	--	22.94	≤ 23.98	Pass
11ac-VHT20	MCS0	128	5640	19.32	19.38	--	--	22.36	≤ 23.98	Pass
11ac-VHT20	MCS0	149	5745	26.44	26.17	--	--	29.32	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	26.52	26.27	--	--	29.41	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	26.51	26.02	--	--	29.28	≤ 30.00	Pass
11ac-VHT40	MCS0	38	5190	20.29	20.89	21.02	21.51	26.97	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	23.09	23.58	23.93	23.96	29.67	≤ 30.00	Pass
11ac-VHT40	MCS0	102	5510	20.53	20.94	--	--	23.75	≤ 23.98	Pass
11ac-VHT40	MCS0	110	5550	20.72	20.69	--	--	23.72	≤ 23.98	Pass
11ac-VHT40	MCS0	126	5630	21.06	20.63	--	--	23.86	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	25.85	26.10	--	--	28.99	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	26.44	26.50	--	--	29.48	≤ 30.00	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT80	MCS0	42	5210	19.15	19.13	18.92	19.20	25.12	≤ 30.00	Pass
11ac-VHT80	MCS0	106	5530	21.00	20.24	--	--	23.65	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	21.11	20.55	--	--	23.85	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	22.74	23.45	--	--	26.12	≤ 30.00	Pass
11ac-VHT160	MCS0	50	5250	15.25	15.98	15.62	16.34	21.84	≤ 23.98	Pass
11ac-VHT160	MCS0	114	5570	20.81	20.69	--	--	23.76	≤ 23.98	Pass
11ax-HE20	MCS0	36	5180	22.13	22.15	21.70	22.62	28.18	≤ 30.00	Pass
11ax-HE20	MCS0	40	5220	22.04	22.07	21.88	22.86	28.25	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	21.88	21.63	21.57	22.67	27.98	≤ 30.00	Pass
11ax-HE20	MCS0	100	5500	19.73	20.24	--	--	23.00	≤ 23.98	Pass
11ax-HE20	MCS0	116	5580	19.86	20.03	--	--	22.96	≤ 23.98	Pass
11ax-HE20	MCS0	128	5640	19.96	19.77	--	--	22.88	≤ 23.98	Pass
11ax-HE20	MCS0	149	5745	26.42	26.27	--	--	29.36	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	26.27	26.31	--	--	29.30	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	26.41	26.14	--	--	29.29	≤ 30.00	Pass
11ax-HE40	MCS0	38	5190	19.42	20.58	20.36	20.85	26.36	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	23.27	23.81	23.90	24.04	29.79	≤ 30.00	Pass
11ax-HE40	MCS0	102	5510	20.62	21.09	--	--	23.87	≤ 23.98	Pass
11ax-HE40	MCS0	110	5550	20.80	20.74	--	--	23.78	≤ 23.98	Pass
11ax-HE40	MCS0	126	5630	21.00	20.68	--	--	23.85	≤ 23.98	Pass
11ax-HE40	MCS0	151	5755	25.35	25.59	--	--	28.48	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	25.87	26.36	--	--	29.13	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	21.96	21.80	22.08	22.32	28.06	≤ 30.00	Pass
11ax-HE80	MCS0	106	5530	21.20	20.50	--	--	23.87	≤ 23.98	Pass
11ax-HE80	MCS0	122	5610	21.00	20.50	--	--	23.77	≤ 23.98	Pass
11ax-HE80	MCS0	155	5775	22.25	23.15	--	--	25.73	≤ 30.00	Pass
11ax-HE160	MCS0	50	5250	14.85	15.68	15.35	15.56	21.39	≤ 23.98	Pass
11ax-HE160	MCS0	114	5570	20.88	20.46	--	--	23.69	≤ 23.98	Pass

Note:

- For NII-1 Bands, The Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$ .
- For NII-2c/-3 Bands, The Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ .

## 7.5. Transmit Power Control

### 7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


### 7.5.2. Test Procedure Used

KDB 789033 D02v02r01- Section II) E)3)b) Method PM-G

### 7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### 7.5.4. Test Setup

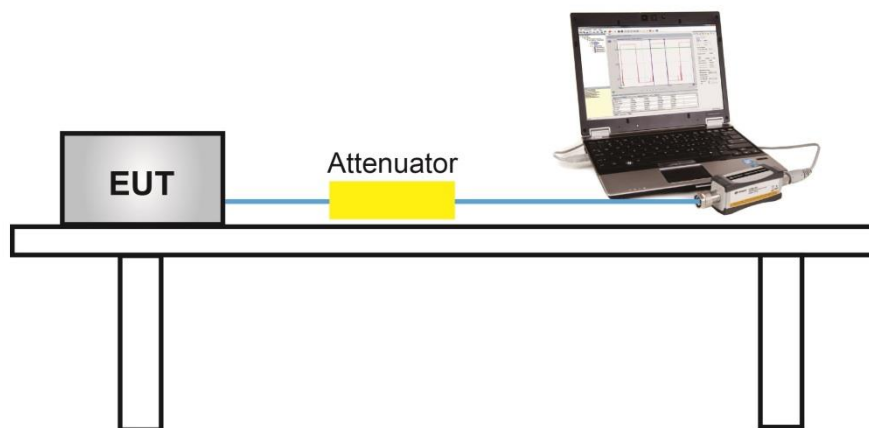

### 7.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

## 7.6. Power Spectral Density Measurement

### 7.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### 7.6.2. Test Procedure Used

KDB 789033 D02v02r01-Section II) F

### 7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,  
RBW = 510 kHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add  $10 \cdot \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \cdot \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

### 7.6.4. Test Setup

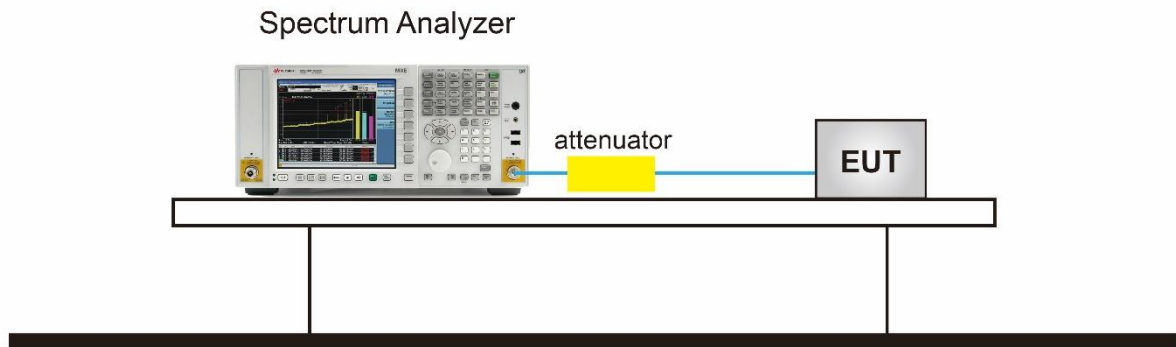

### 7.6.5. Test Result

Product	AX7800 Whole Home Mesh Wi-Fi 6 System	Test Engineer	Jay
Test Site	SR5	Test Date	2022/8/16~2022/8/17
Mode	Power Spectral Density (U-NII- 1/-2a / -2c) CDD Mode		

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
				Ant 0	Ant 1	Ant 2	Ant 3				
11a	6Mbps	36	5180	9.023	9.571	9.392	10.160	95.48	15.778	≤ 15.98	Pass
11a	6Mbps	44	5220	9.190	9.496	9.275	10.019	95.48	15.729	≤ 15.98	Pass
11a	6Mbps	48	5240	9.271	9.058	9.003	9.867	95.48	15.535	≤ 15.98	Pass
11a	6Mbps	100	5500	7.279	7.834	--	--	95.48	10.777	≤ 11.00	Pass
11a	6Mbps	116	5580	7.577	7.568	--	--	95.48	10.784	≤ 11.00	Pass
11a	6Mbps	128	5640	7.265	7.321	--	--	95.48	10.504	≤ 11.00	Pass
11ac-VHT20	MCS0	36	5180	9.096	9.560	9.297	10.106	98.84	15.603	≤ 15.98	Pass
11ac-VHT20	MCS0	40	5220	9.382	9.428	9.425	10.129	98.84	15.674	≤ 15.98	Pass
11ac-VHT20	MCS0	48	5240	9.241	9.478	9.202	10.015	98.84	15.568	≤ 15.98	Pass
11ac-VHT20	MCS0	100	5500	7.134	7.870	--	--	98.84	10.579	≤ 11.00	Pass
11ac-VHT20	MCS0	116	5580	7.786	7.517	--	--	98.84	10.715	≤ 11.00	Pass
11ac-VHT20	MCS0	128	5640	7.562	7.648	--	--	98.84	10.666	≤ 11.00	Pass
11ac-VHT40	MCS0	38	5190	4.573	5.353	5.431	5.719	97.42	11.423	≤ 15.98	Pass
11ac-VHT40	MCS0	46	5230	7.866	8.342	8.590	8.807	97.42	14.549	≤ 15.98	Pass
11ac-VHT40	MCS0	102	5510	5.552	5.844	--	--	97.42	8.824	≤ 11.00	Pass
11ac-VHT40	MCS0	110	5550	5.667	5.423	--	--	97.42	8.671	≤ 11.00	Pass
11ac-VHT40	MCS0	126	5630	5.771	5.761	--	--	97.42	8.890	≤ 11.00	Pass
11ac-VHT80	MCS0	42	5210	0.472	1.087	1.123	1.017	94.68	7.191	≤ 15.98	Pass
11ac-VHT80	MCS0	106	5530	3.511	1.972	--	--	94.68	6.057	≤ 11.00	Pass
11ac-VHT80	MCS0	122	5610	3.167	2.693	--	--	94.68	6.184	≤ 11.00	Pass
11ac-VHT80	MCS0	155	5775	0.472	1.087	1.123	1.017	94.68	7.191	≤ 11.00	Pass
11ac-VHT160	MCS0	50	5250	-5.543	-4.791	-4.962	-4.793	90.26	1.454	≤ 11.00	Pass
11ac-VHT160	MCS0	114	5570	0.306	0.692	--	--	90.26	3.959	≤ 11.00	Pass

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
				Ant 0	Ant 1	Ant 2	Ant 3				
11ax-HE20	MCS0	36	5180	9.338	9.627	9.460	10.114	98.20	15.744	≤ 15.98	Pass
11ax-HE20	MCS0	44	5220	9.279	9.407	9.379	10.571	98.20	15.792	≤ 15.98	Pass
11ax-HE20	MCS0	48	5240	9.501	9.254	8.991	10.115	98.20	15.585	≤ 15.98	Pass
11ax-HE20	MCS0	100	5500	7.313	7.786	--	--	98.20	10.645	≤ 11.00	Pass
11ax-HE20	MCS0	116	5580	7.835	7.663	--	--	98.20	10.839	≤ 11.00	Pass
11ax-HE20	MCS0	128	5640	8.010	7.542	--	--	98.20	10.871	≤ 11.00	Pass
11ax-HE40	MCS0	38	5190	4.089	5.132	5.162	5.581	96.88	11.183	≤ 15.98	Pass
11ax-HE40	MCS0	46	5230	7.767	8.359	8.315	8.489	96.88	14.399	≤ 15.98	Pass
11ax-HE40	MCS0	102	5510	5.562	5.797	--	--	96.88	8.829	≤ 11.00	Pass
11ax-HE40	MCS0	110	5550	5.252	5.224	--	--	96.88	8.386	≤ 11.00	Pass
11ax-HE40	MCS0	126	5630	5.697	5.343	--	--	96.88	8.672	≤ 11.00	Pass
11ax-HE80	MCS0	42	5210	1.072	1.461	1.163	1.663	94.68	7.604	≤ 15.98	Pass
11ax-HE80	MCS0	106	5530	3.663	2.590	--	--	94.68	6.407	≤ 11.00	Pass
11ax-HE80	MCS0	122	5610	2.800	2.865	--	--	94.68	6.080	≤ 11.00	Pass
11ax-HE160	MCS0	50	5250	-6.178	-4.886	-5.457	-5.065	90.26	1.097	≤ 11.00	Pass
11ax-HE160	MCS0	114	5570	0.144	0.547	--	--	90.26	3.806	≤ 11.00	Pass

Note 1: When EUT duty cycle ≥ 98%,

For NII-1 bands, the total PSD (dBm/MHz) =  $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$  (dBm/MHz).

For NII-2c band, the total PSD (dBm/MHz) =  $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$  (dBm/MHz).

When EUT duty cycle < 98%,

For NII-1 bands, the total PSD (dBm/MHz) =  $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty Cycle})$ (dBm/MHz).

For NII-2c band, the total PSD (dBm/MHz) =  $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty Cycle})$ (dBm/MHz).

Note 2: For 5150 - 5250MHzBand: PSD Limit (dBm/MHz) = 17 - (7.02 - 6) = 15.98dBm/MHz.



Product	AX7800 Whole Home Mesh Wi-Fi 6 System	Test Engineer	Jay
Test Site	SR5	Test Date	2022/8/15~2022/8/17
Test Item	Power Spectral Density (U-NII-3) CDD Mode		

Test Mode	Data Rate/MCS	Ch. No.	Freq. (MHz)	PSD (dBm/510KHz)		Duty Cycle (%)	Total PSD (dBm/510kHz)	Limit (dBm/500kHz)	Result
				Ant 0	Ant 1				
11a	6Mbps	149	5745	11.272	11.330	95.48	14.512	≤ 30.00	Pass
11a	6Mbps	157	5785	11.398	11.392	95.48	14.606	≤ 30.00	Pass
11a	6Mbps	165	5825	11.914	11.296	95.48	14.827	≤ 30.00	Pass
11ac-VHT20	MCS0	149	5745	10.785	10.764	98.84	13.835	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	11.050	10.850	98.84	14.012	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	11.215	11.046	98.84	14.192	≤ 30.00	Pass
11ac-VHT40	MCS0	151	5755	7.883	7.888	97.42	11.009	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	8.533	8.608	97.42	11.694	≤ 30.00	Pass
11ac-VHT80	MCS0	155	5775	1.590	2.577	94.68	5.359	≤ 30.00	Pass
11ax-HE20	MCS0	149	5745	11.073	10.966	98.20	14.109	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	11.177	10.918	98.20	14.139	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	11.358	10.983	98.20	14.264	≤ 30.00	Pass
11ax-HE40	MCS0	151	5755	7.038	7.421	96.88	10.382	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	7.894	8.373	96.88	11.288	≤ 30.00	Pass
11ax-HE80	MCS0	155	5775	1.451	2.451	94.68	5.227	≤ 30.00	Pass

Note 1: When EUT duty cycle ≥ 98%,

the total PSD (dBm/510kHz) =  $10 \cdot \log \{ 10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} \}$  (dBm/510kHz).

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) =  $10 \cdot \log \{ 10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} \}$  (dBm/510kHz) +  $10 \cdot \log (1/\text{Duty Cycle})$ .