


EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2437MHz	Test Voltage	120V/60Hz

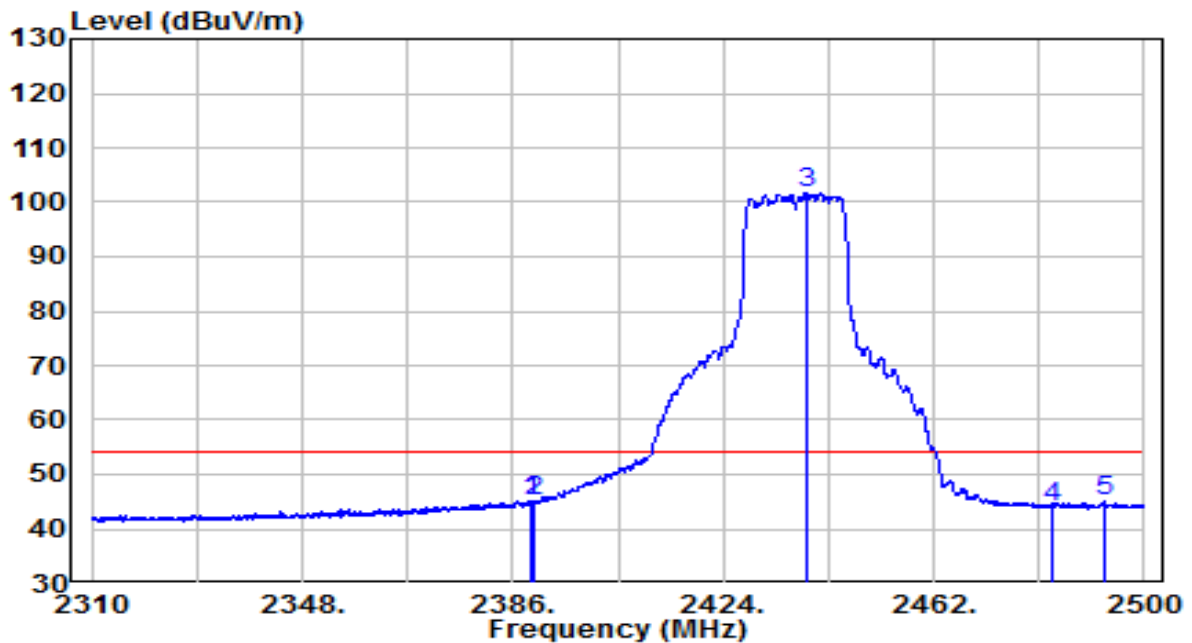


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.135	12.80	32.21	45.01	-8.99	54.00	Average
2	2390.000	12.72	32.22	44.93	-9.07	54.00	Average
3	* 2438.915	69.35	32.42	101.77	N/A	N/A	Average
4	2483.500	11.31	32.61	43.92	-10.08	54.00	Average
5	2492.875	12.33	32.65	44.98	-9.02	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	120V/60Hz

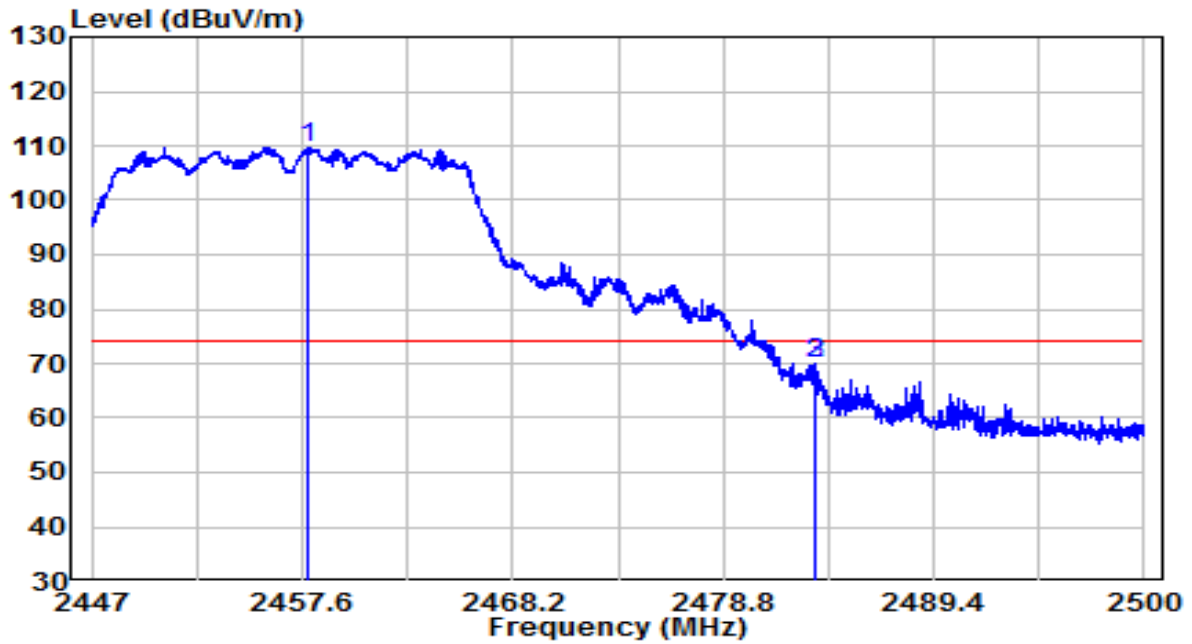


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	77.11	32.50	109.61	N/A	N/A	Peak
2	2483.490	37.34	32.61	69.95	-4.05	74.00	Peak
3	2483.490	37.34	32.61	69.95	-4.05	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	120V/60Hz

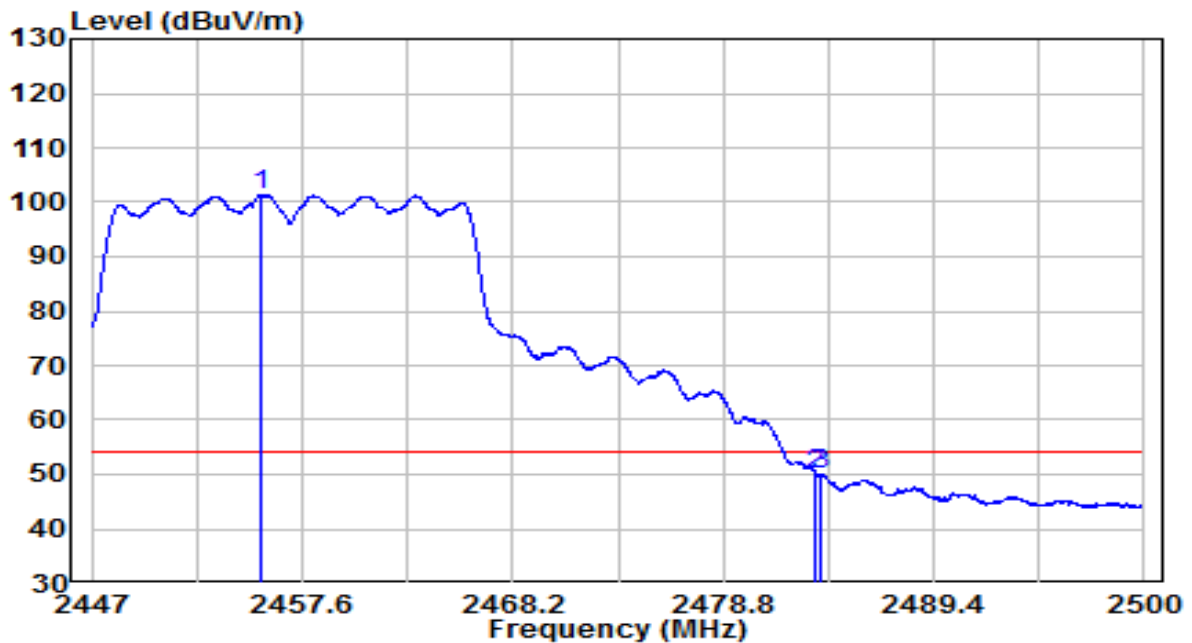


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 2455.480	68.76	32.49	101.25	N/A	N/A	Average
2	2483.490	17.46	32.61	50.07	-3.93	54.00	Average
3	2483.756	17.53	32.61	50.14	-3.86	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	120V/60Hz

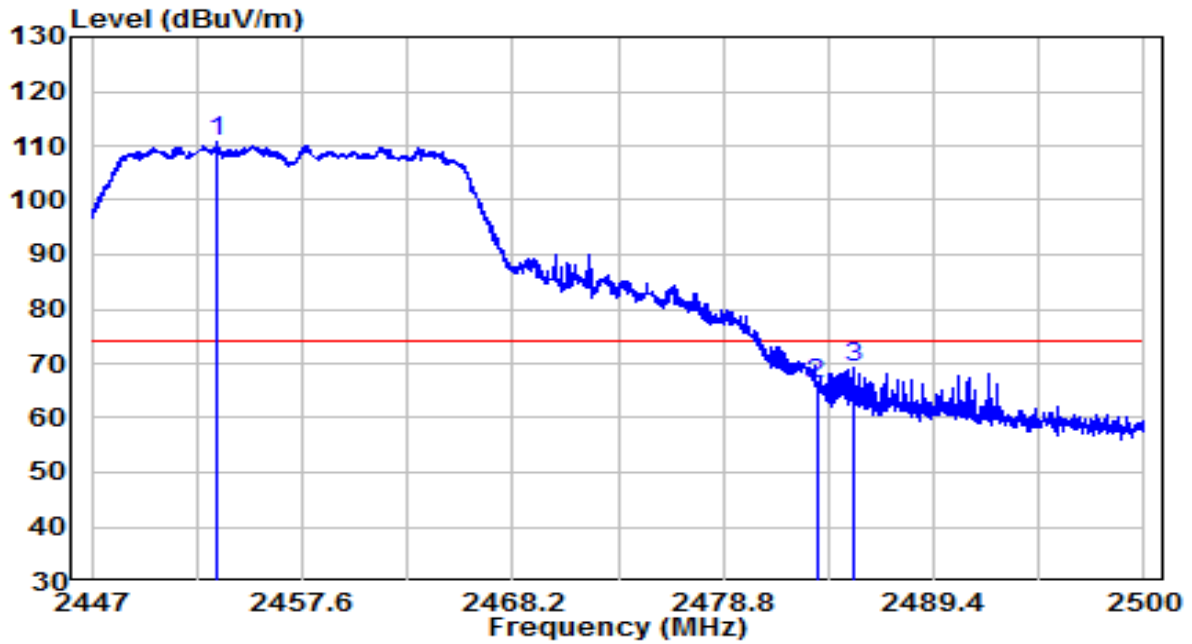


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	78.34	32.48	110.83	N/A	N/A	Peak
2		33.45	32.61	66.06	-7.94	74.00	Peak
3		36.74	32.62	69.36	-4.64	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	120V/60Hz

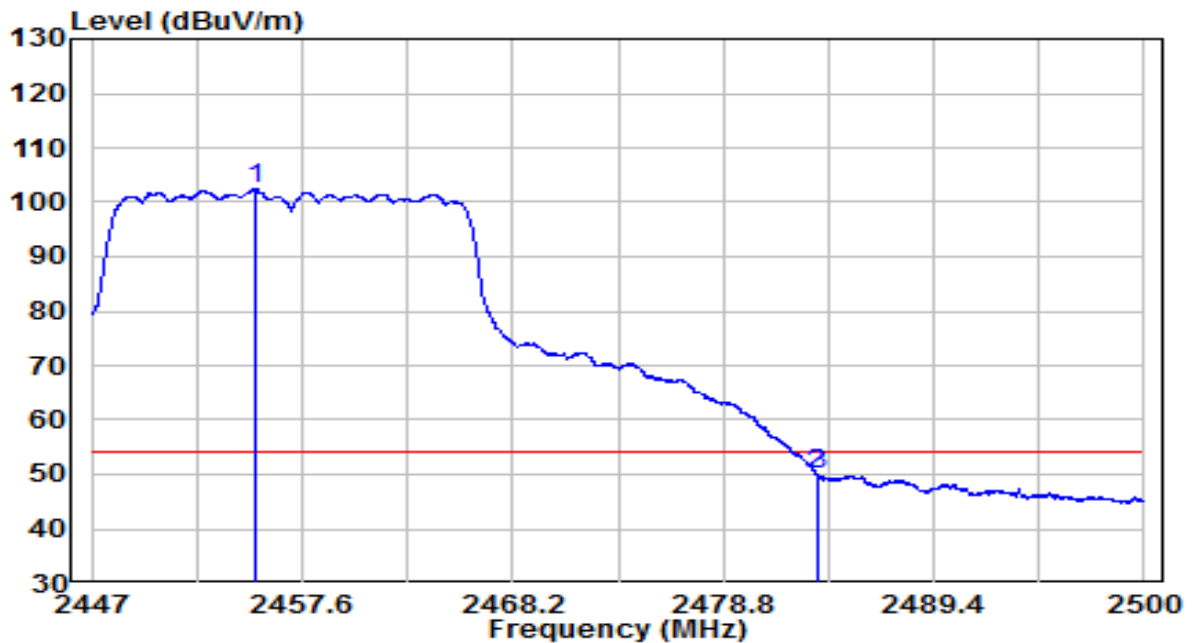


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 2455.294	69.92	32.49	102.41	N/A	N/A	Average
2	2483.500	17.46	32.61	50.07	-3.93	54.00	Average
3	2483.517	17.51	32.61	50.12	-3.88	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	120V/60Hz

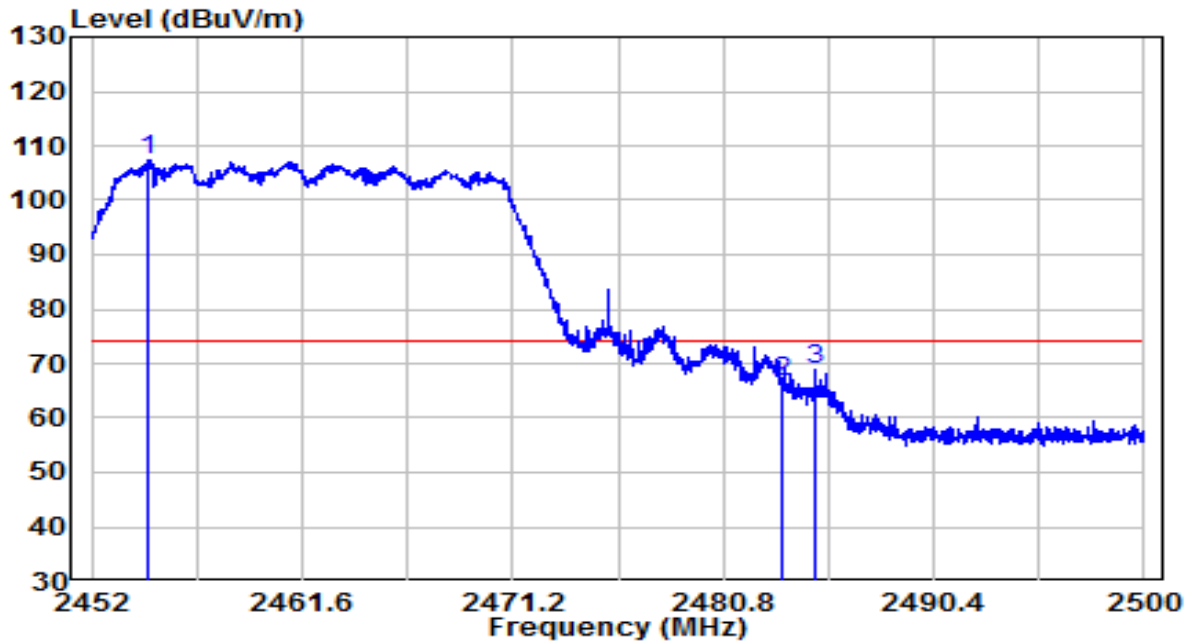


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	75.03	32.49	107.52	N/A	N/A	Peak
2		34.07	32.61	66.68	-7.32	74.00	Peak
3		36.38	32.62	69.00	-5.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	120V/60Hz

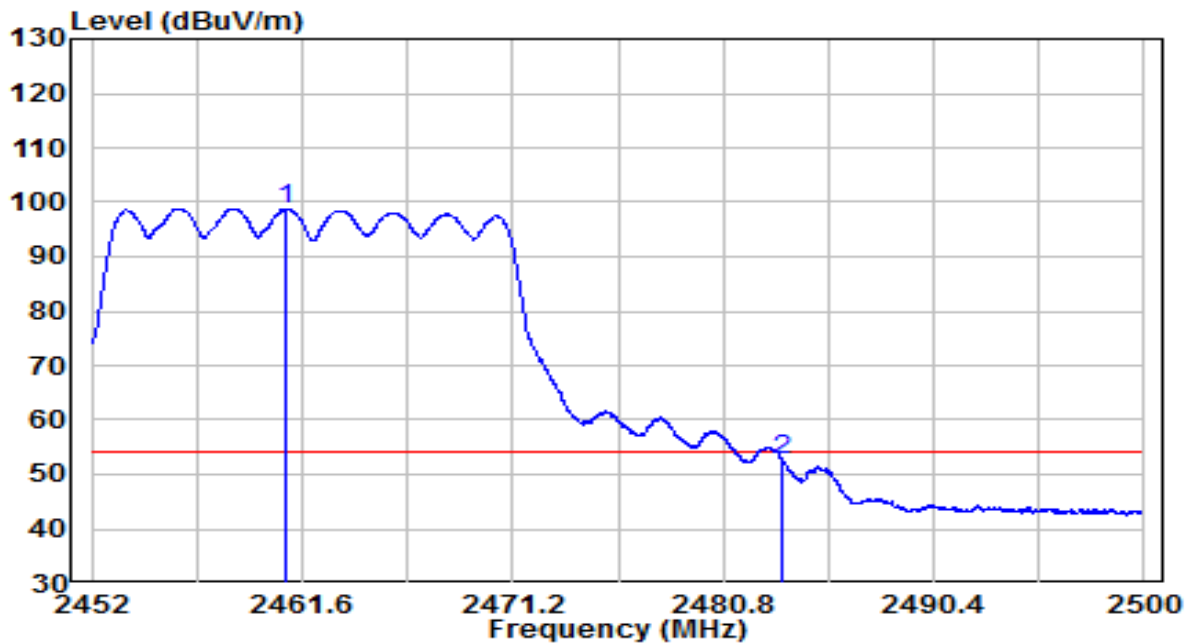


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	2460.856	66.29	32.52	98.81	N/A	N/A	Average
2		2483.500	19.90	32.61	52.51	-1.49	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	120V/60Hz

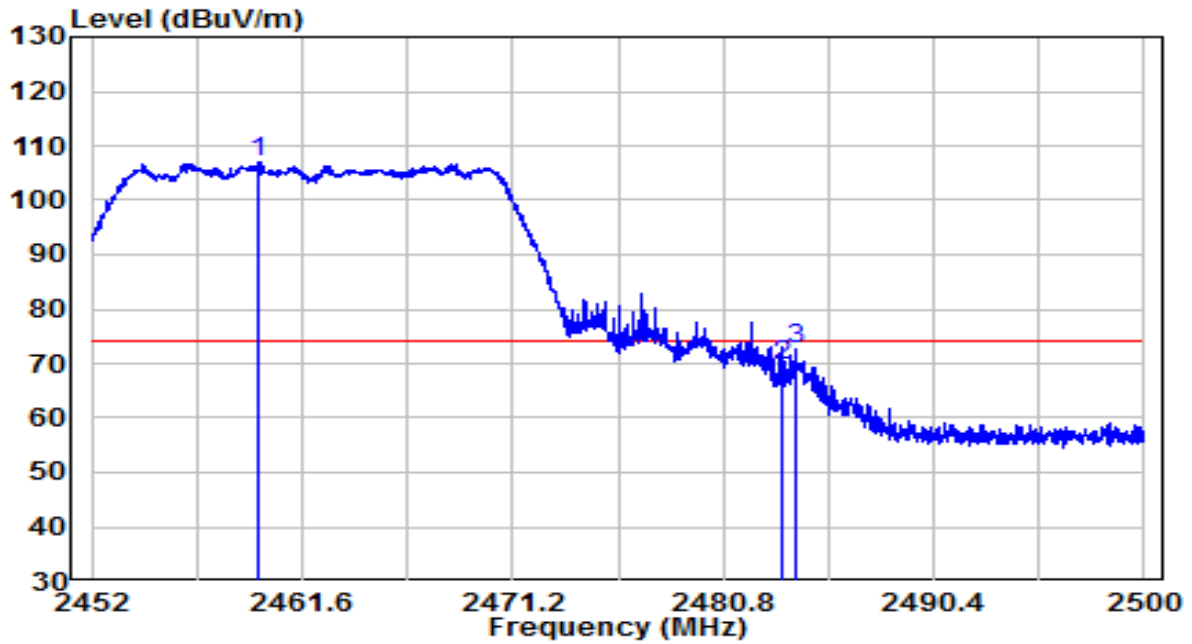


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	74.49	32.51	107.00	N/A	N/A	Peak
2		37.03	32.61	69.64	-4.36	74.00	Peak
3		40.12	32.61	72.73	-1.27	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	120V/60Hz

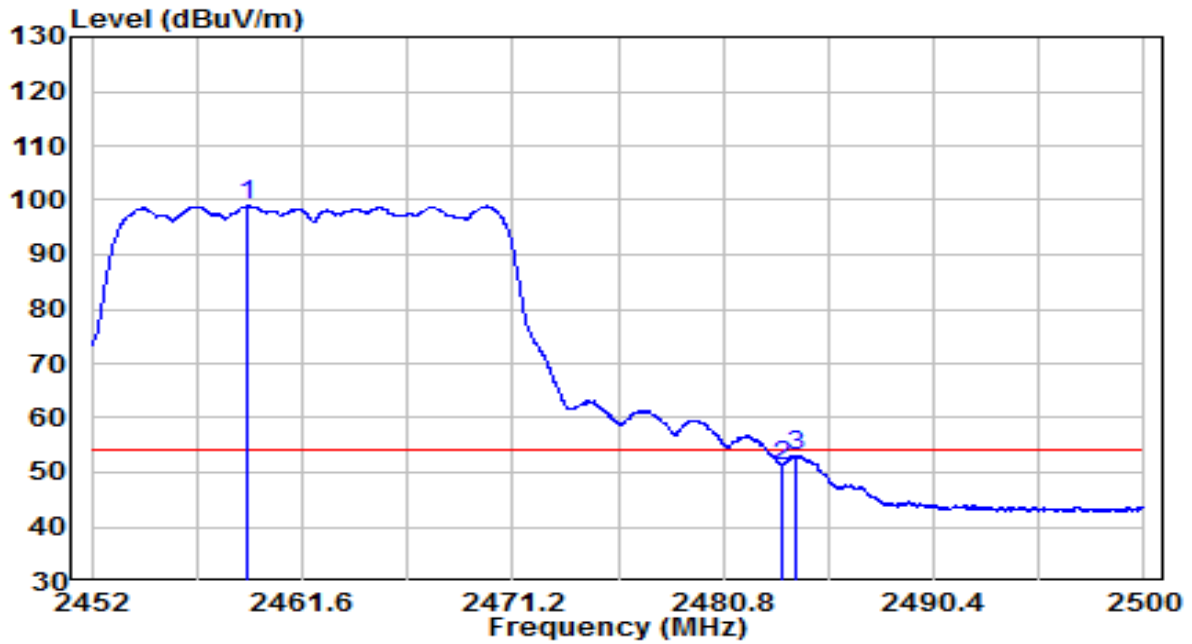


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	66.55	32.51	99.06	N/A	N/A	Average
2		18.68	32.61	51.29	-2.71	54.00	Average
3		20.57	32.61	53.18	-0.82	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	120V/60Hz

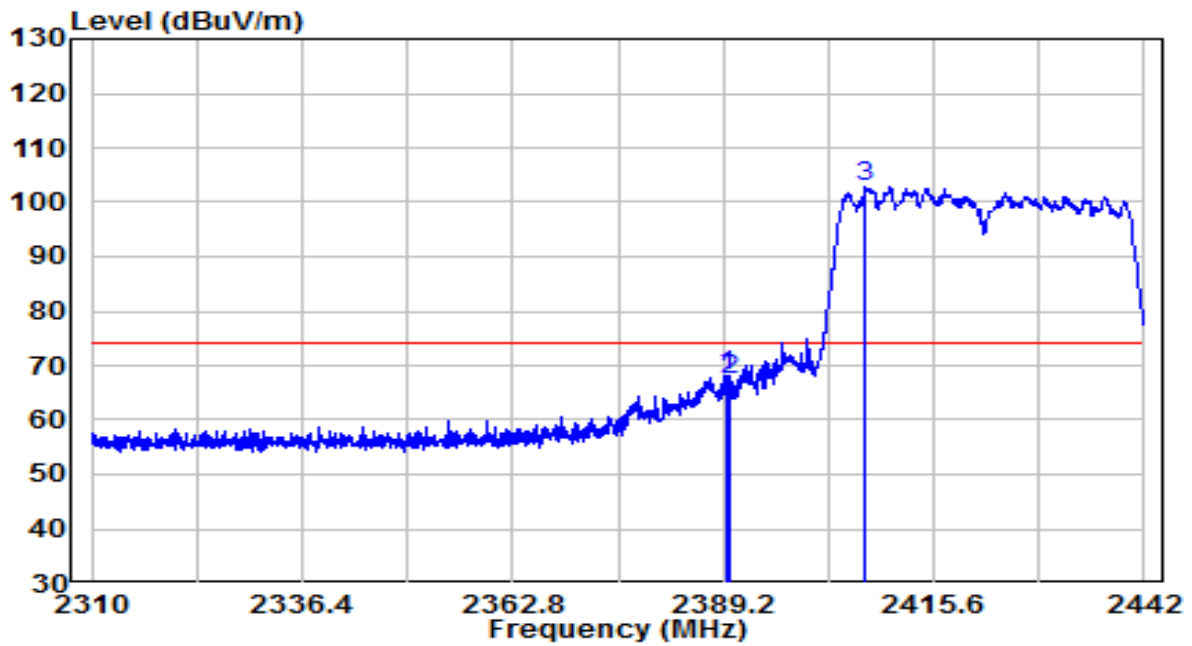


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.728	36.01	32.22	68.23	-5.77	74.00	Peak
2	2390.000	35.02	32.22	67.24	-6.76	74.00	Peak
3	* 2407.086	70.51	32.29	102.80	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	120V/60Hz

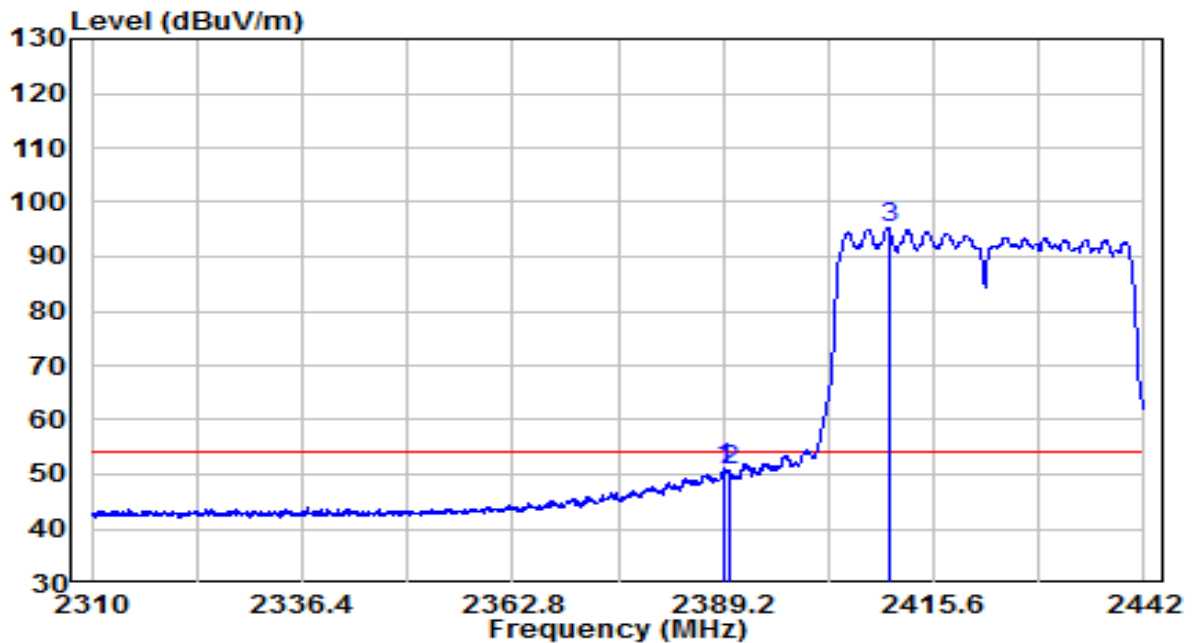


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.398	19.00	32.22	51.21	-2.79	54.00	Average
2	2390.000	18.69	32.22	50.91	-3.09	54.00	Average
3	* 2409.990	62.85	32.30	95.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	120V/60Hz

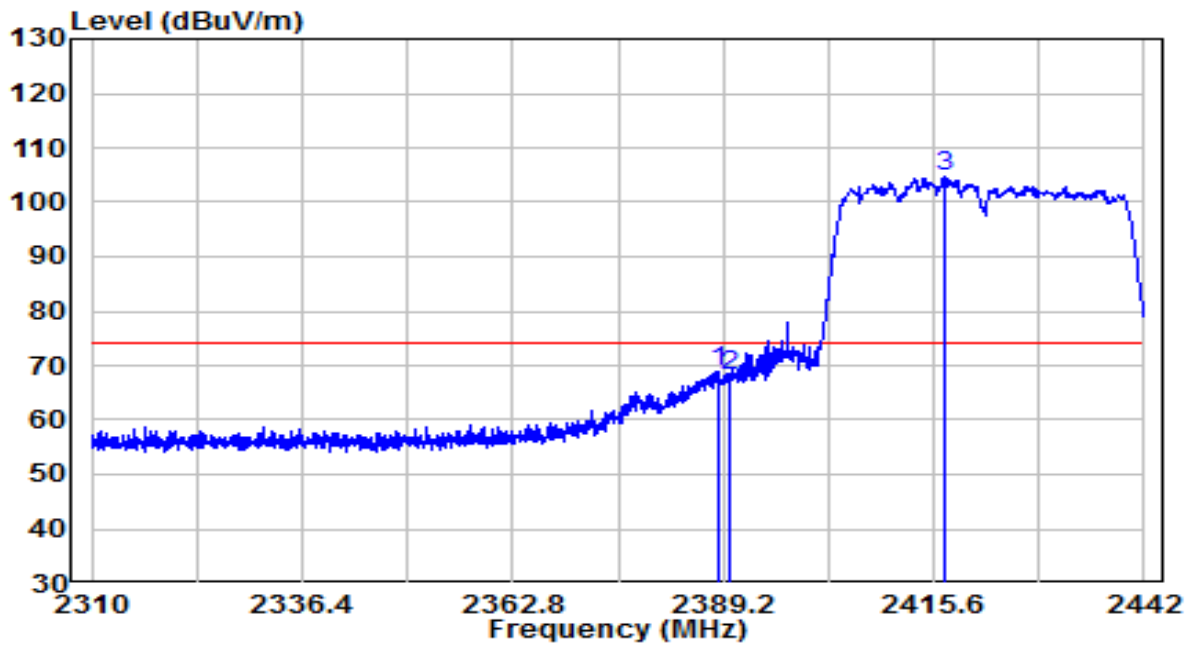


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.672	36.49	32.21	68.70	-5.30	74.00	Peak
2	2390.000	35.98	32.22	68.20	-5.80	74.00	Peak
3	* 2417.118	72.48	32.33	104.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	120V/60Hz

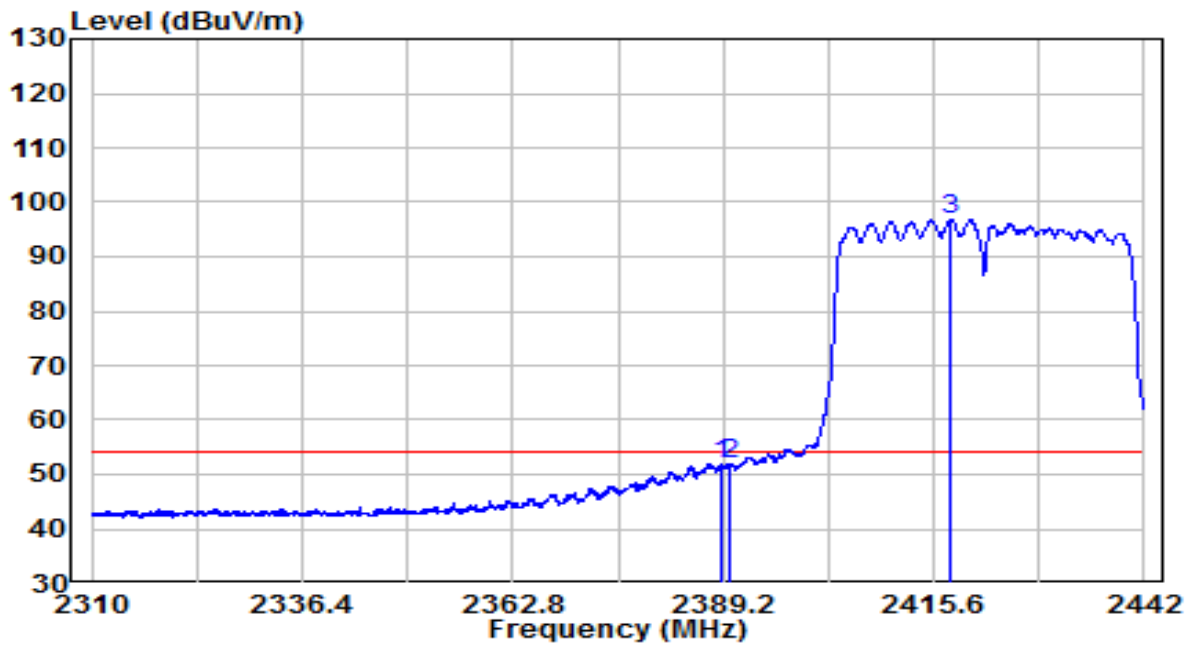


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.002	19.65	32.21	51.87	-2.13	54.00	Average
2	2390.000	19.55	32.22	51.77	-2.23	54.00	Average
3	* 2417.712	64.47	32.33	96.80	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2427MHz	Test Voltage	120V/60Hz

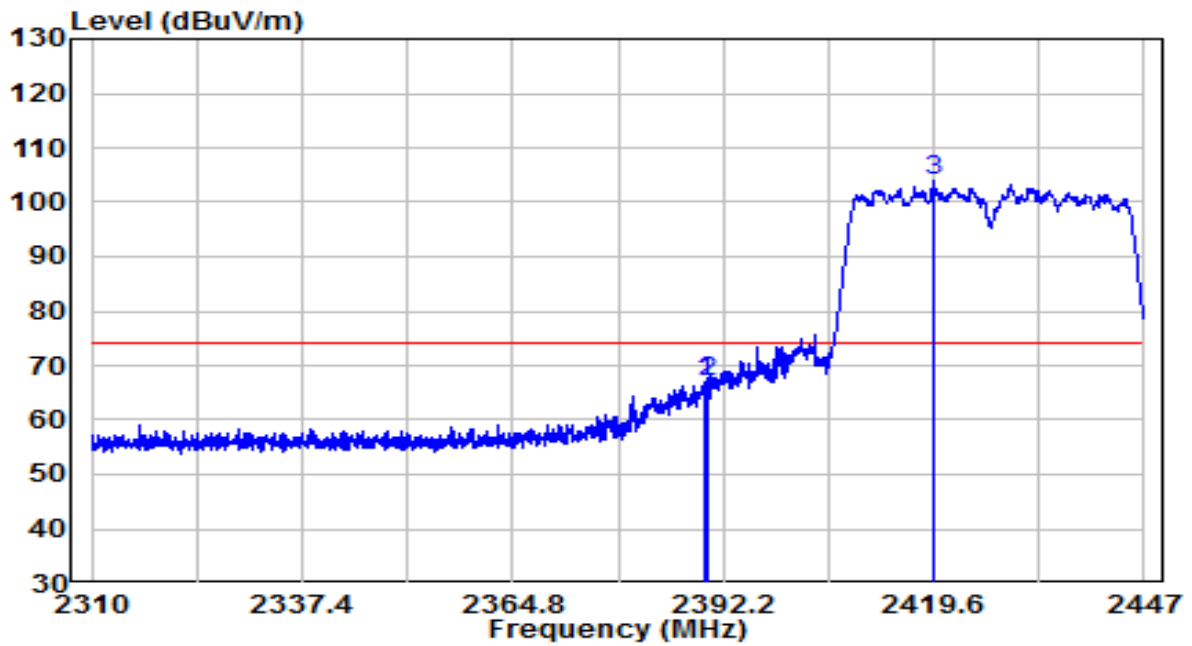


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.734	34.85	32.22	67.07	-6.93	74.00	Peak
2	2390.008	34.80	32.22	67.02	-6.98	74.00	Peak
3	* 2419.600	71.43	32.34	103.78	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2427MHz	Test Voltage	120V/60Hz

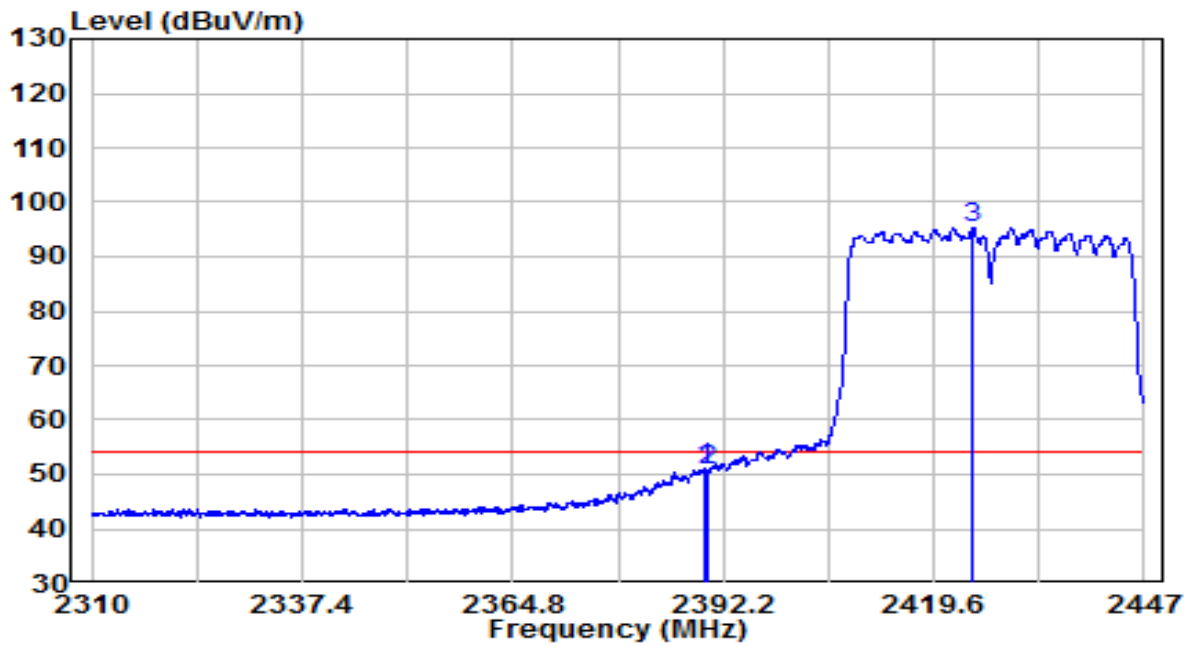


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.802	18.81	32.22	51.03	-2.97	54.00	Average
2	2390.008	18.55	32.22	50.77	-3.23	54.00	Average
3	* 2424.738	62.80	32.36	95.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2427MHz	Test Voltage	120V/60Hz

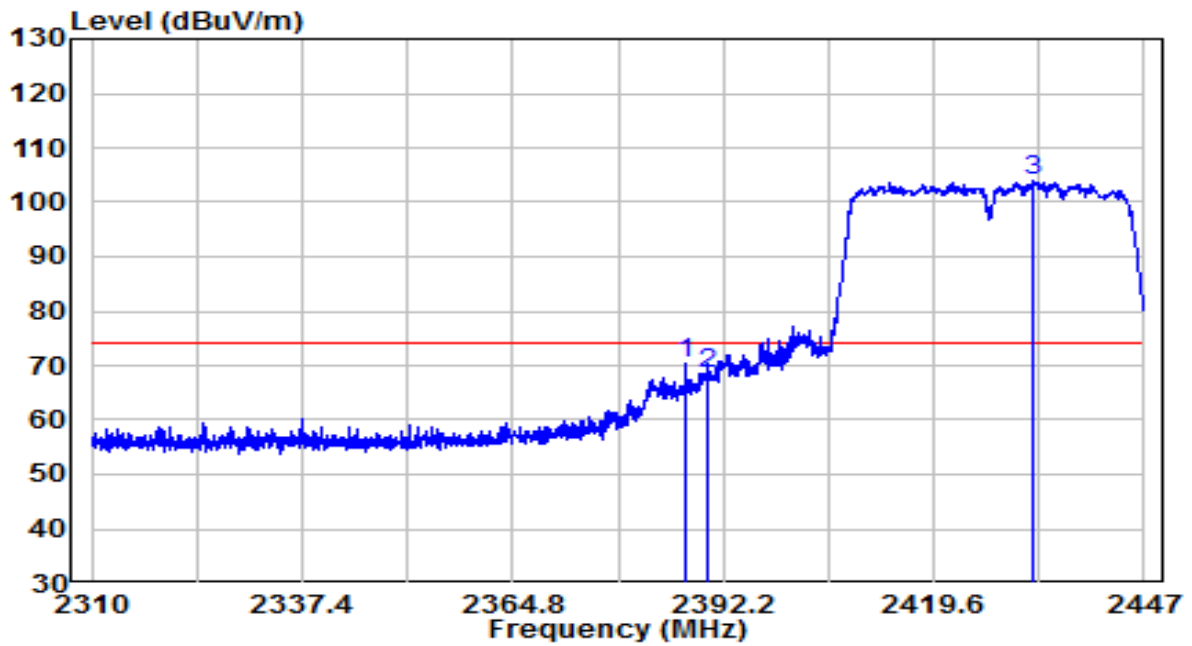


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2387.199	38.02	32.21	70.23	-3.77	74.00	Peak
2	2390.008	36.12	32.22	68.34	-5.66	74.00	Peak
3	* 2432.546	71.55	32.40	103.95	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2427MHz	Test Voltage	120V/60Hz

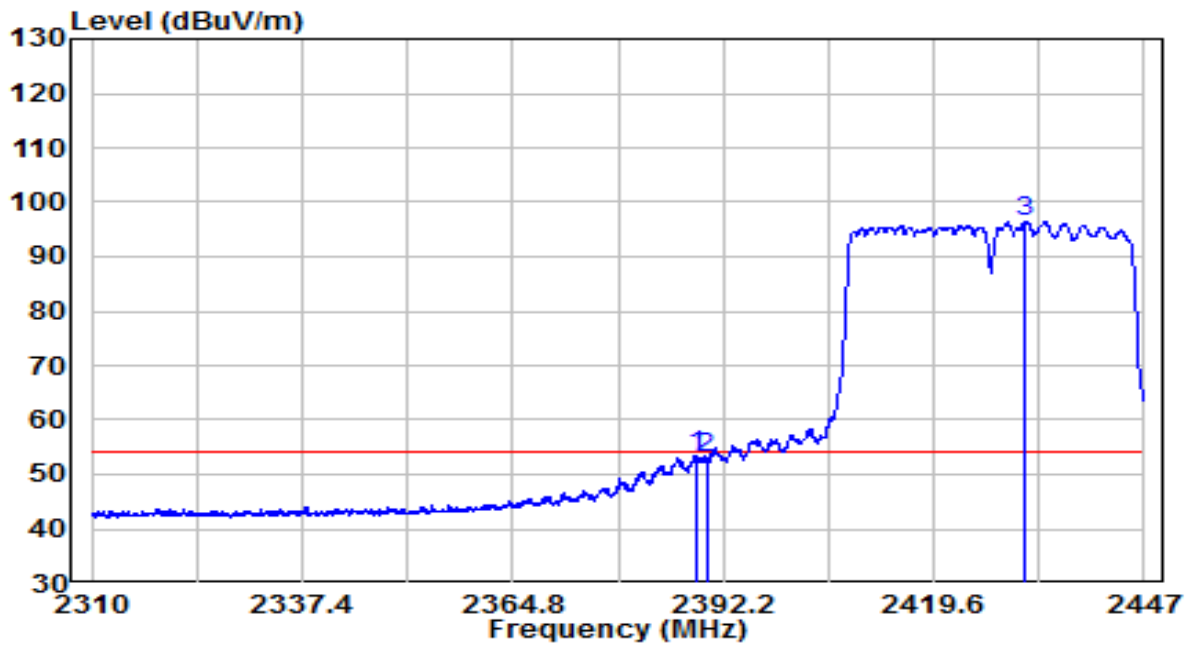


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.775	21.23	32.21	53.44	-0.56	54.00	Average
2	2390.000	20.65	32.22	52.86	-1.14	54.00	Average
3	* 2431.519	64.21	32.39	96.60	N/A	N/A	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2437MHz	Test Voltage	120V/60Hz

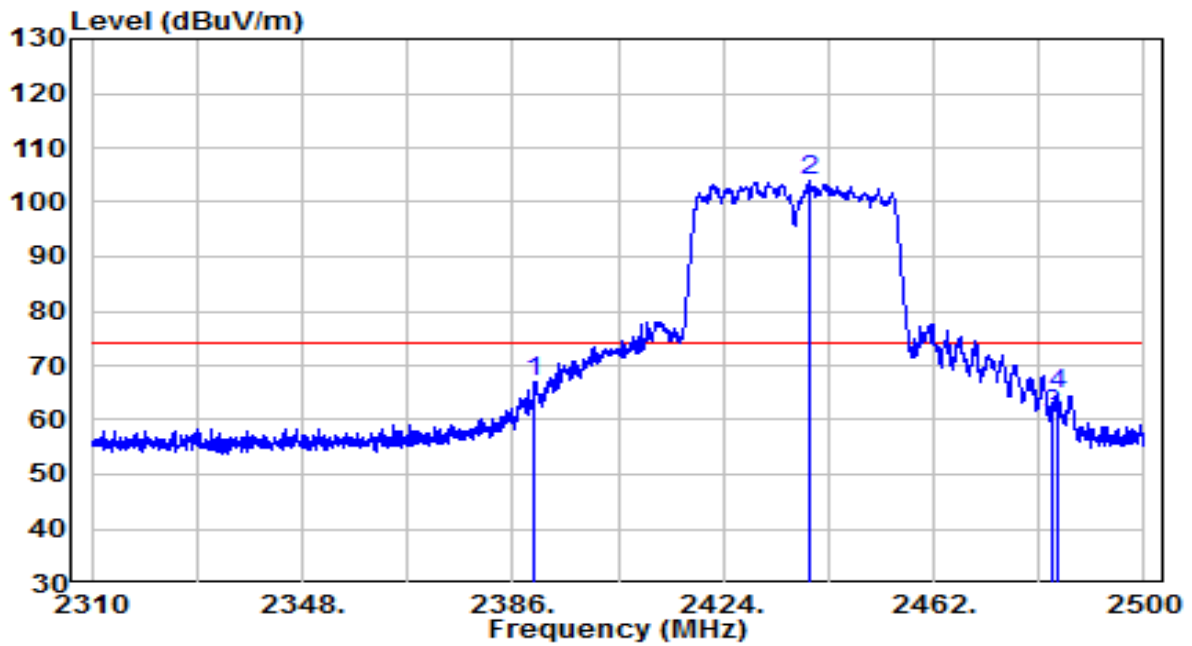


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	34.90	32.22	67.12	-6.88	74.00	Peak
2	* 2439.580	71.62	32.43	104.04	N/A	N/A	Peak
3	2483.500	28.43	32.61	61.04	-12.96	74.00	Peak
4	2484.325	31.94	32.61	64.56	-9.44	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2437MHz	Test Voltage	120V/60Hz

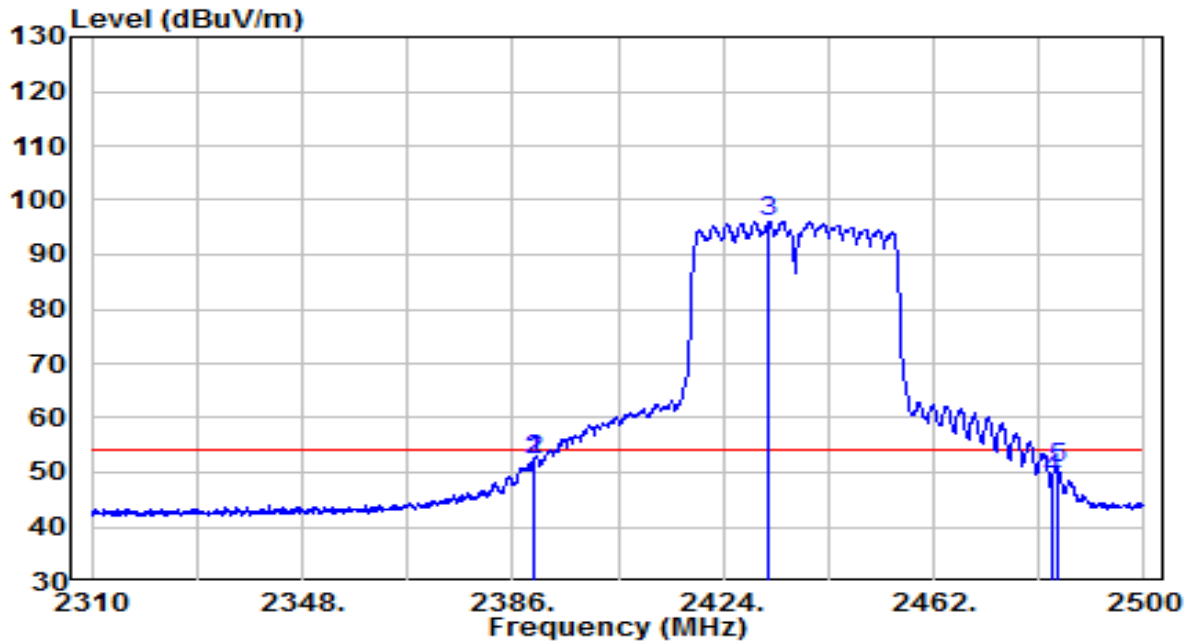


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.800	20.23	32.22	52.45	-1.55	54.00	Average
2	2390.000	20.17	32.22	52.39	-1.61	54.00	Average
3	* 2432.265	63.82	32.40	96.22	N/A	N/A	Average
4	2483.500	16.13	32.61	48.74	-5.26	54.00	Average
5	2484.420	18.25	32.61	50.87	-3.13	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2437MHz	Test Voltage	120V/60Hz

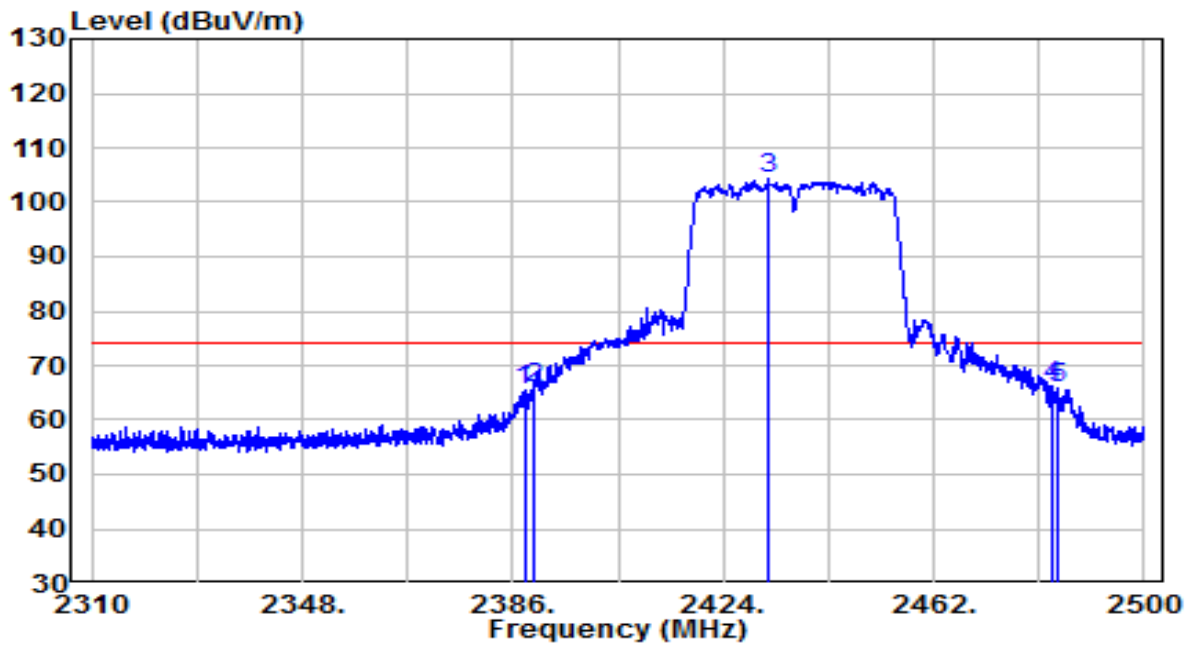


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.090	33.17	32.21	65.38	-8.62	74.00	Peak
2	2390.000	33.47	32.22	65.69	-8.31	74.00	Peak
3	* 2432.075	71.94	32.39	104.34	N/A	N/A	Peak
4	2483.500	33.43	32.61	66.04	-7.96	74.00	Peak
5	2484.230	33.25	32.61	65.87	-8.13	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2437MHz	Test Voltage	120V/60Hz

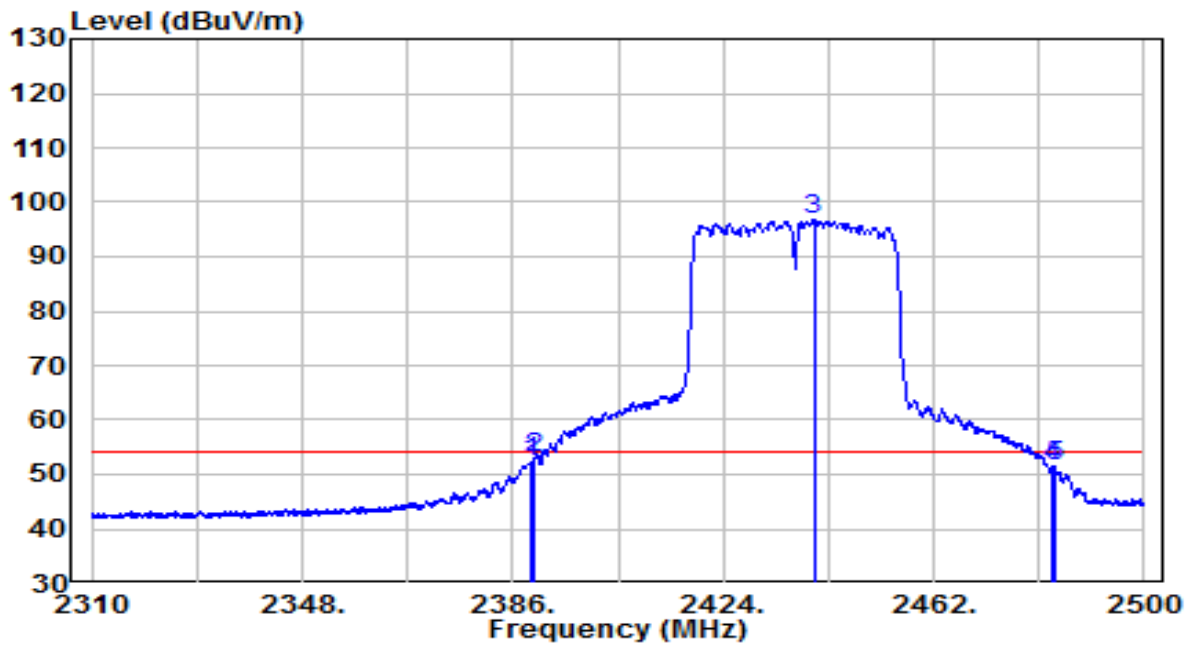


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.325	20.12	32.22	52.33	-1.67	54.00	Average
2	2390.000	20.73	32.22	52.94	-1.06	54.00	Average
3	* 2440.340	64.33	32.43	96.75	N/A	N/A	Average
4	2483.500	18.89	32.61	51.50	-2.50	54.00	Average
5	2483.850	18.80	32.61	51.42	-2.58	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	120V/60Hz

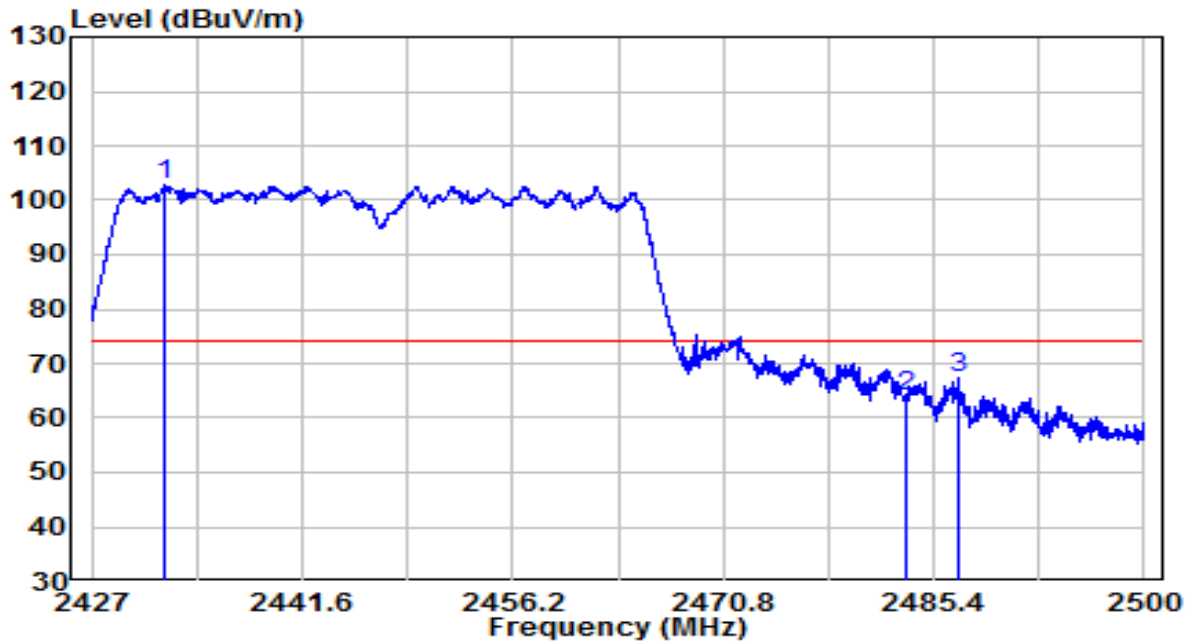


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	70.28	32.39	102.68	N/A	N/A	Peak
2		31.21	32.61	63.82	-10.18	74.00	Peak
3		34.87	32.63	67.50	-6.50	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	120V/60Hz

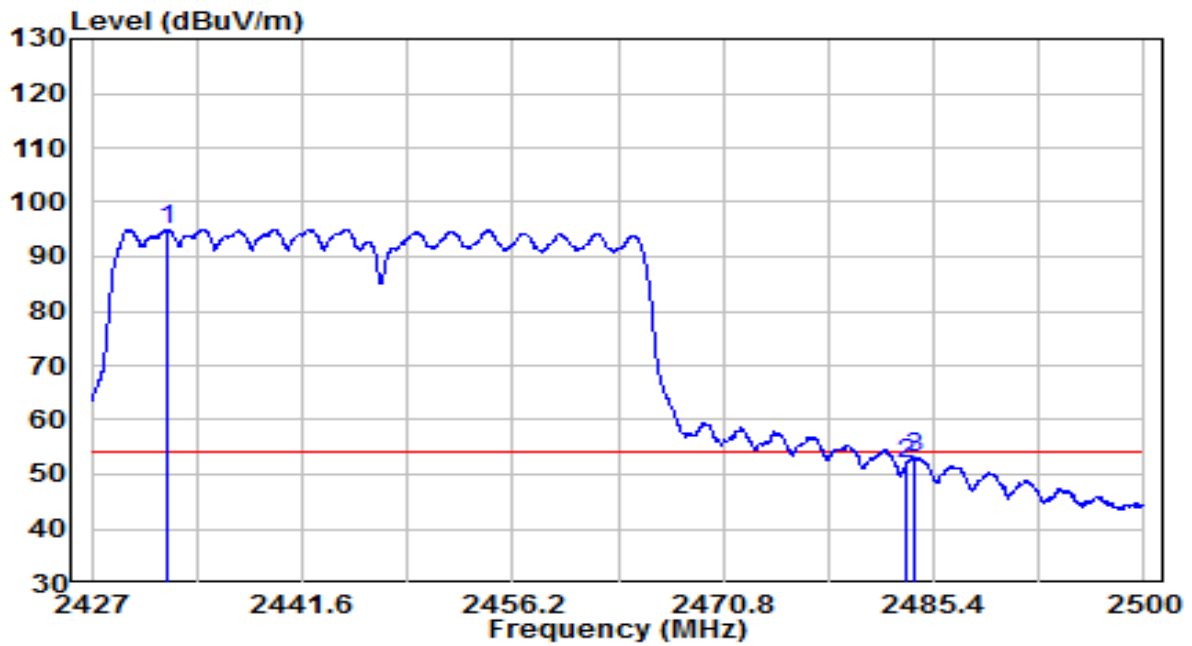


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	62.62	32.40	95.01	N/A	N/A	Average
2		19.29	32.61	51.90	-2.10	54.00	Average
3		20.45	32.61	53.06	-0.94	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	120V/60Hz

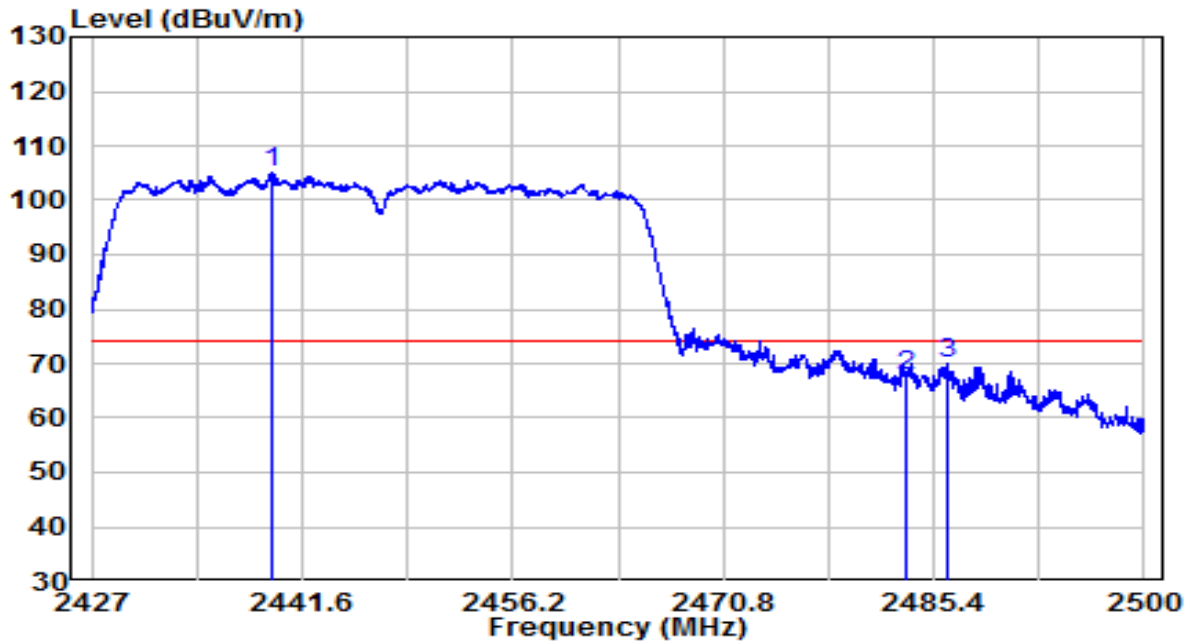


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	72.49	32.43	104.92	N/A	N/A	Peak
2		35.23	32.61	67.84	-6.16	74.00	Peak
3		37.31	32.62	69.93	-4.07	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	120V/60Hz

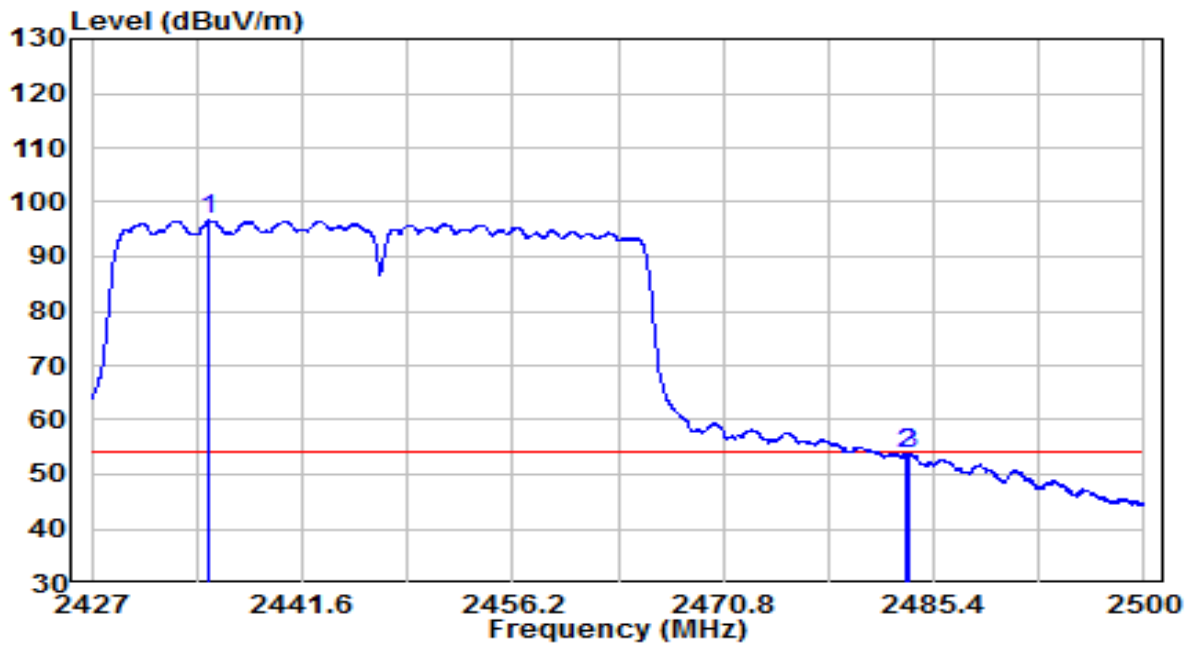


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	64.24	32.41	96.64	N/A	N/A	Average
2		21.19	32.61	53.80	-0.20	54.00	Average
3		21.23	32.61	53.84	-0.16	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	120V/60Hz

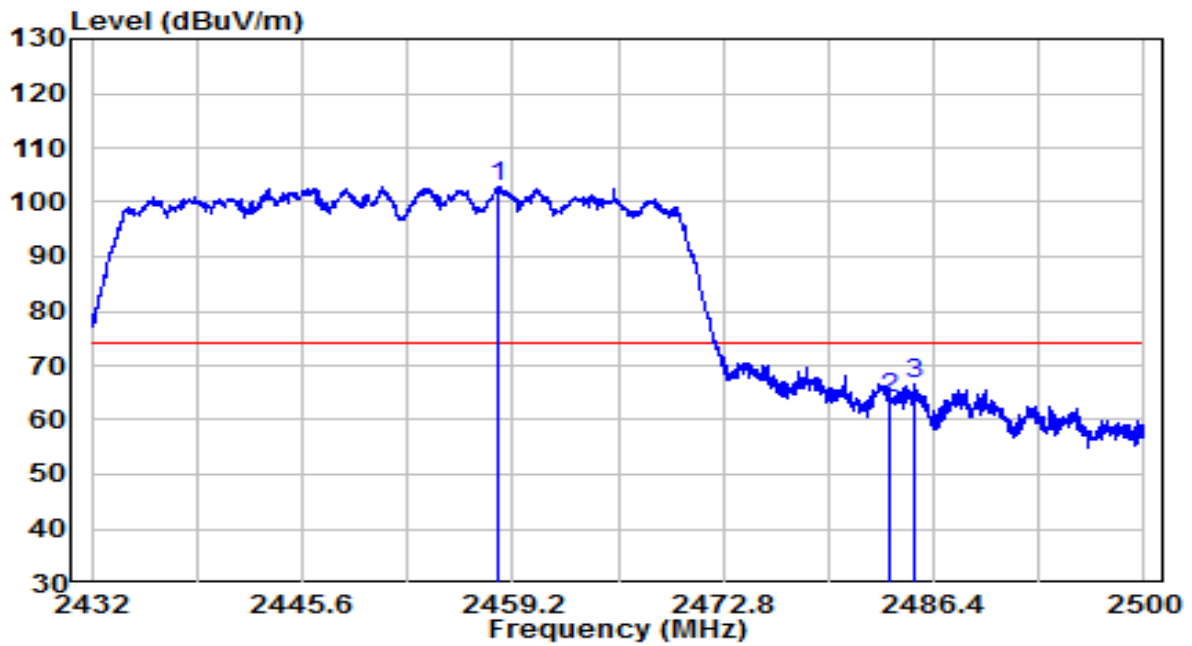


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	2458.214	70.40	32.50	102.90	N/A	N/A	Peak
2		2483.500	31.34	32.61	63.95	-10.05	74.00	Peak
3		2485.210	34.16	32.62	66.78	-7.22	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	120V/60Hz

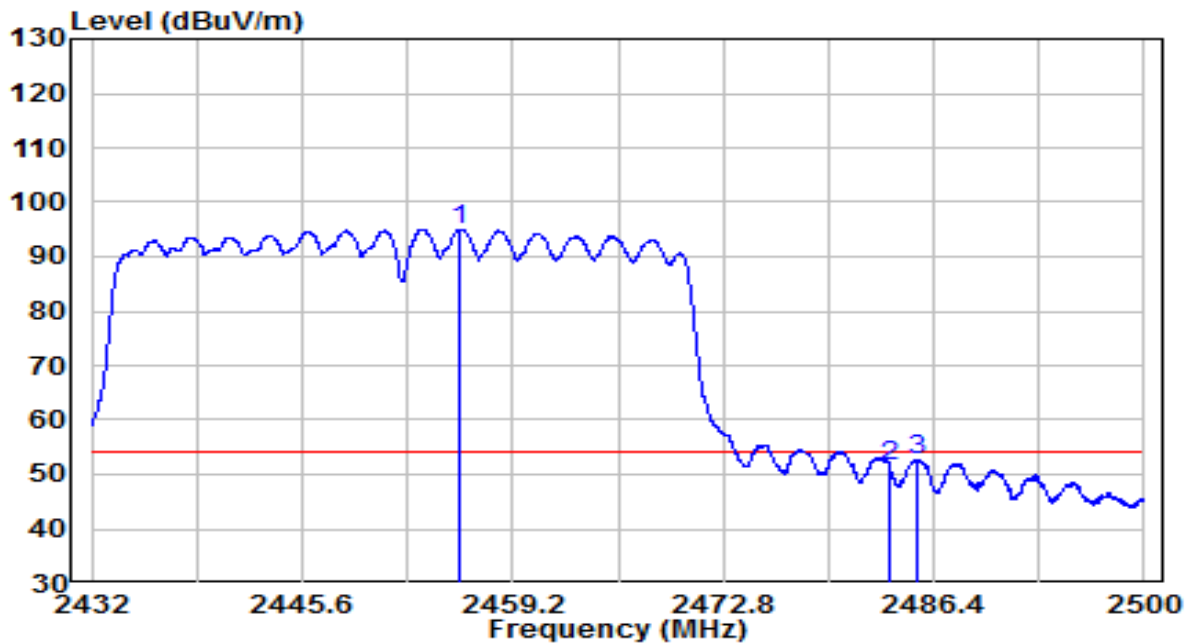


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	62.50	32.49	94.99	N/A	N/A	Average
2		19.01	32.61	51.62	-2.38	54.00	Average
3		20.11	32.62	52.73	-1.27	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	120V/60Hz

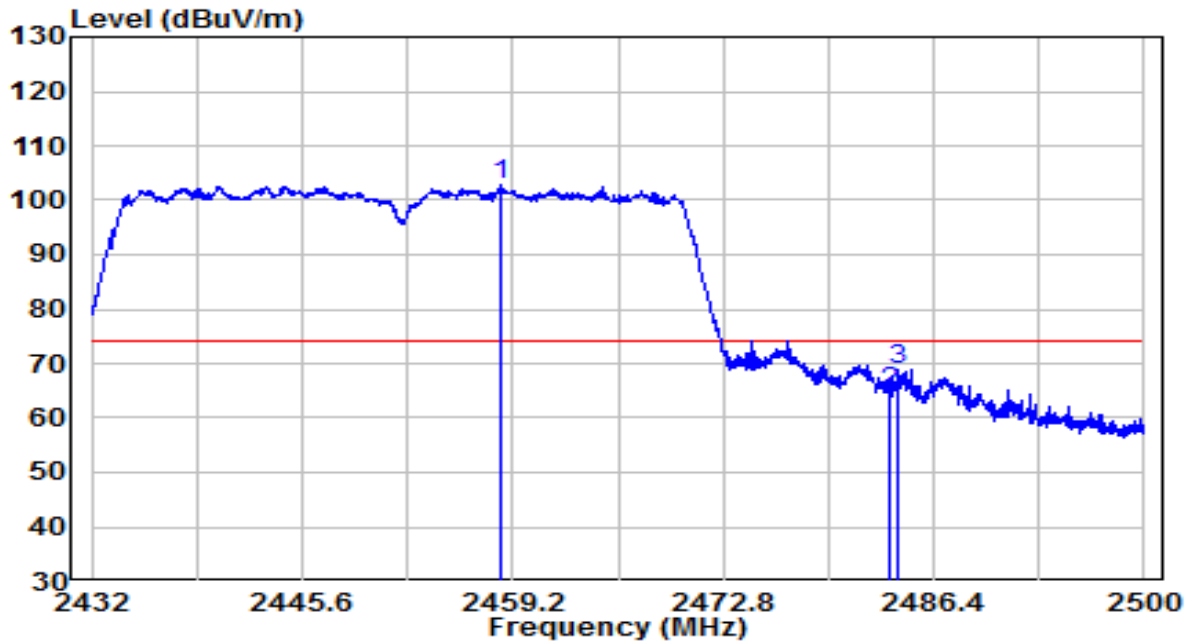


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	70.23	32.51	102.73	N/A	N/A	Peak
2		32.24	32.61	64.85	-9.15	74.00	Peak
3		36.43	32.61	69.04	-4.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	120V/60Hz

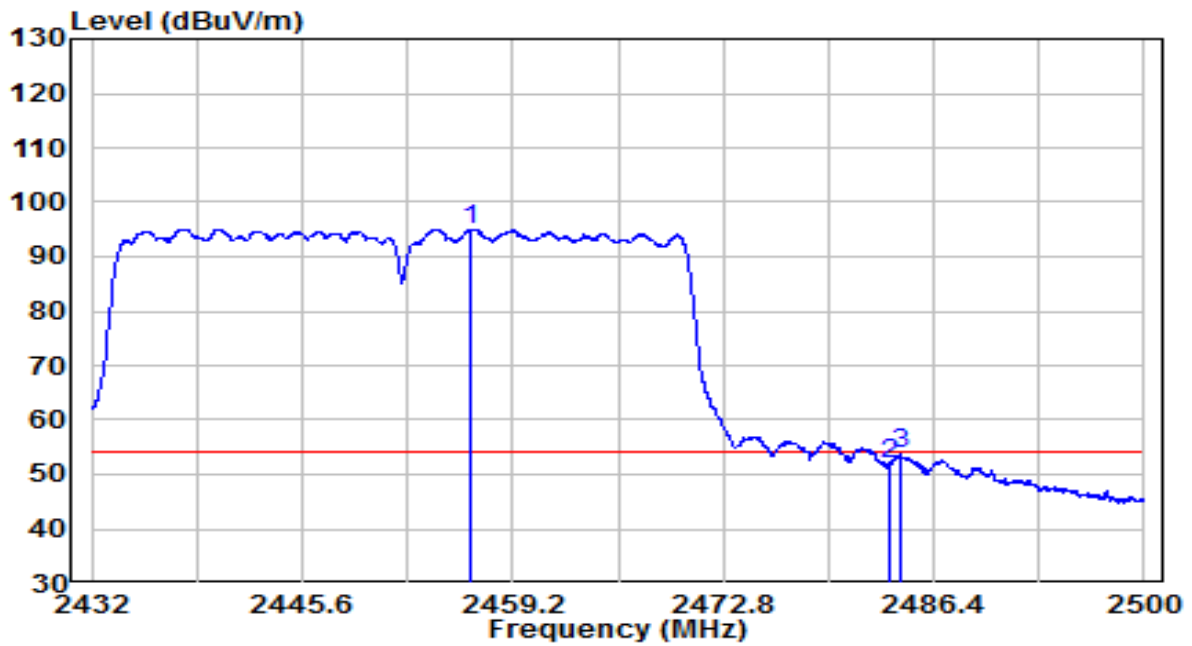


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	62.54	32.50	95.04	N/A	N/A	Average
2		19.13	32.61	51.74	-2.26	54.00	Average
3		21.06	32.61	53.68	-0.32	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	120V/60Hz

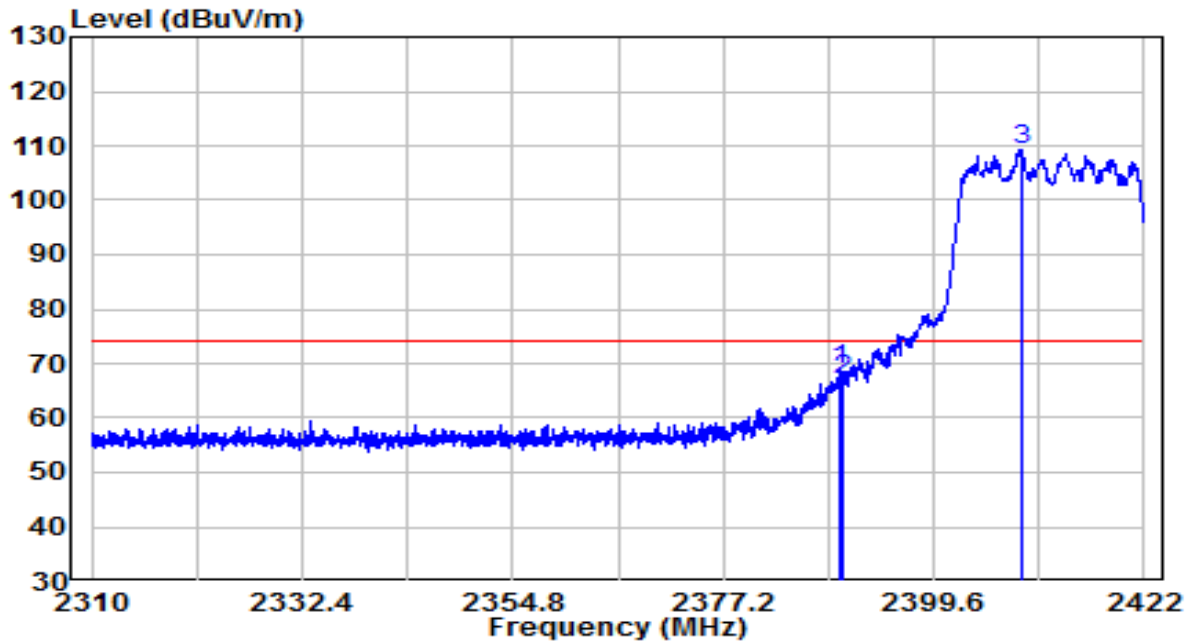


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.688	36.58	32.22	68.80	-5.20	74.00	Peak
2	2390.000	34.59	32.22	66.81	-7.19	74.00	Peak
3	* 2408.896	77.02	32.30	109.31	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	120V/60Hz

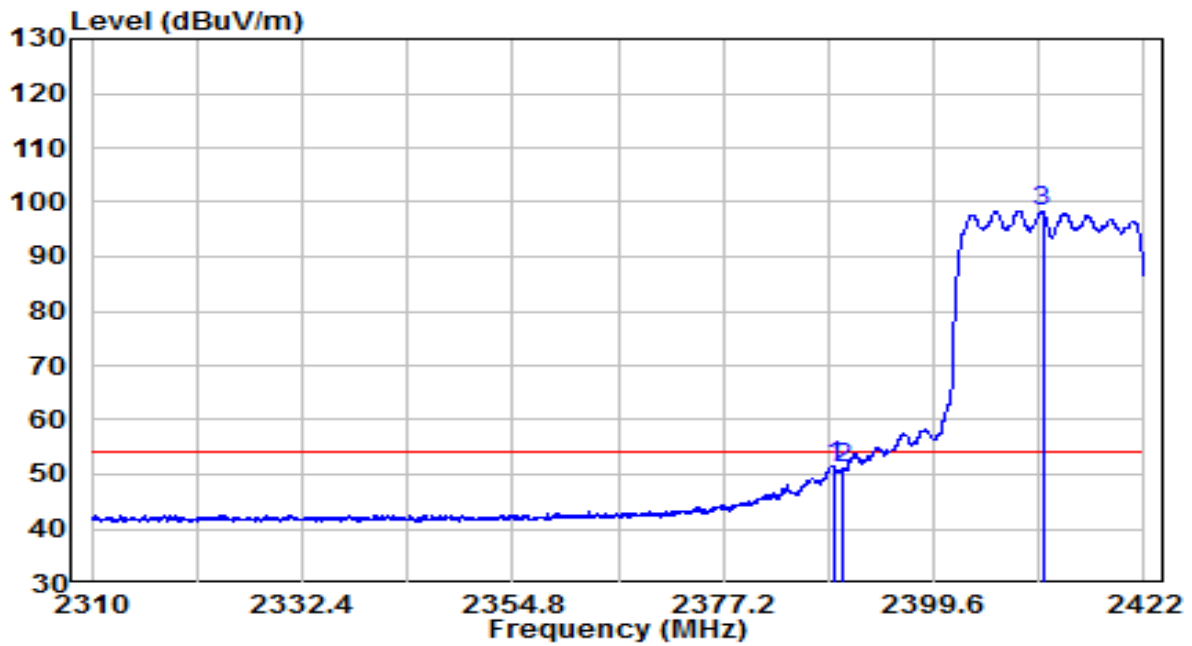


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.904	19.34	32.21	51.55	-2.45	54.00	Average
2	2390.024	18.95	32.22	51.17	-2.83	54.00	Average
3	* 2411.192	66.15	32.31	98.45	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	120V/60Hz

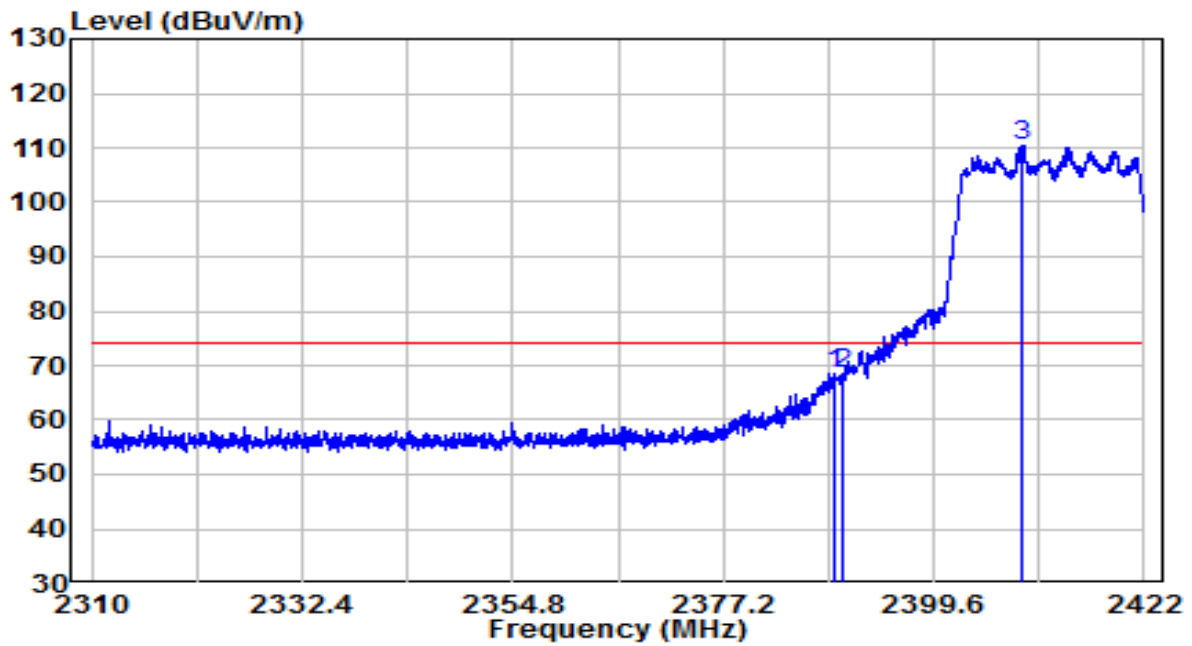


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.904	36.32	32.21	68.53	-5.47	74.00	Peak
2	2390.024	36.25	32.22	68.47	-5.53	74.00	Peak
3	* 2408.896	78.15	32.30	110.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	120V/60Hz

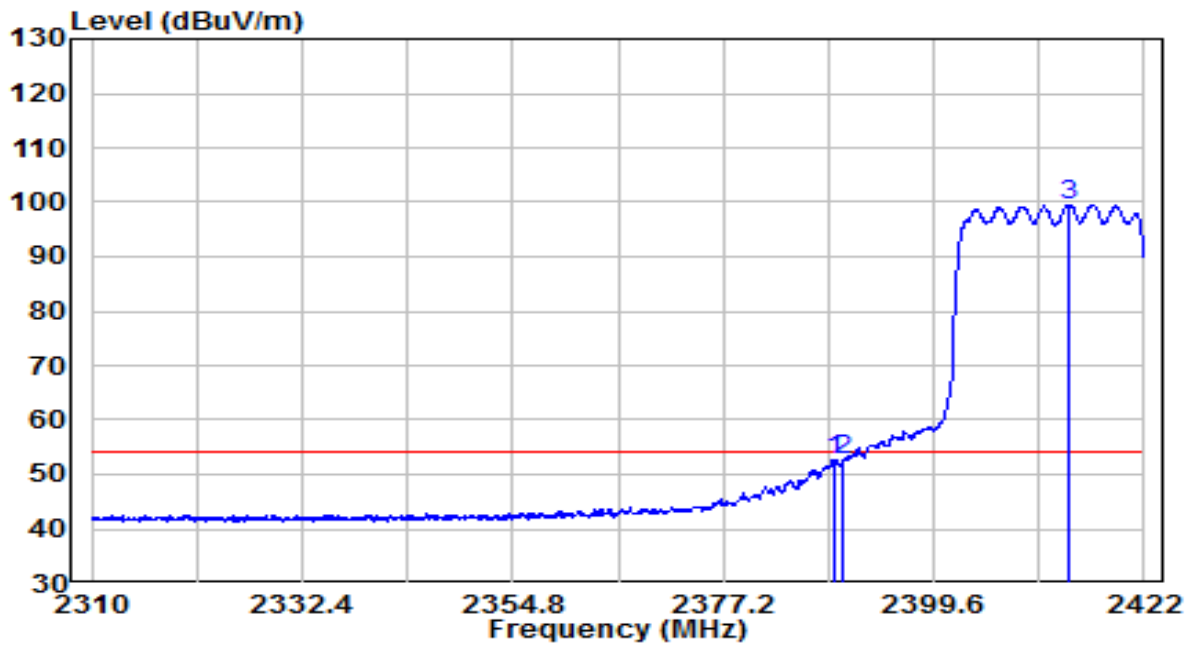


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.128	20.51	32.21	52.73	-1.27	54.00	Average
2	2390.024	20.52	32.22	52.74	-1.26	54.00	Average
3	* 2414.104	67.28	32.32	99.60	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2417MHz	Test Voltage	120V/60Hz

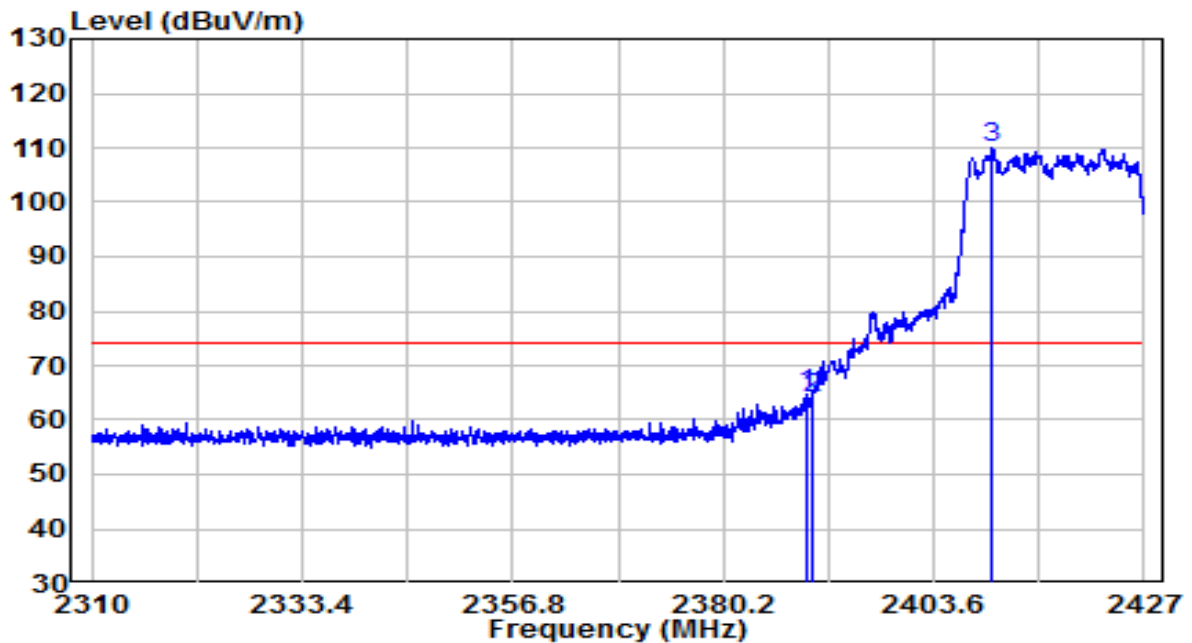


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.385	32.37	32.22	64.59	-9.41	74.00	Peak
2	2390.028	31.65	32.22	63.87	-10.13	74.00	Peak
3	* 2410.035	77.53	32.30	109.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2417MHz	Test Voltage	120V/60Hz

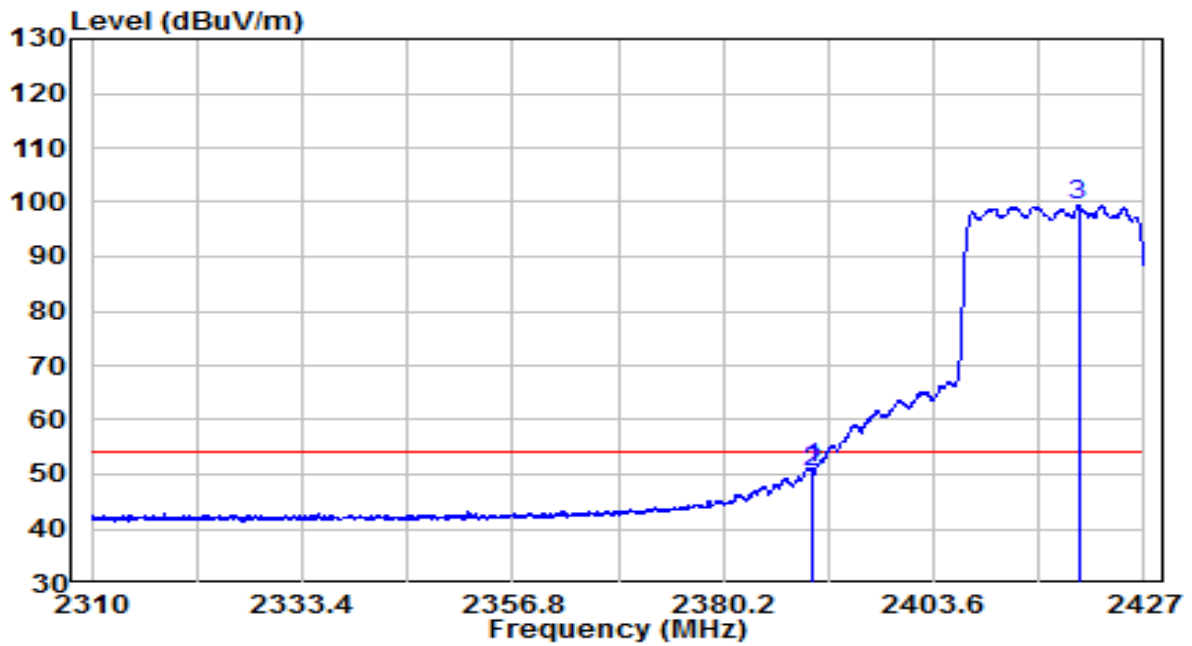


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.969	19.04	32.22	51.26	-2.74	54.00	Average
2	2390.028	18.31	32.22	50.53	-3.47	54.00	Average
3	* 2419.688	67.09	32.34	99.43	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2417MHz	Test Voltage	120V/60Hz

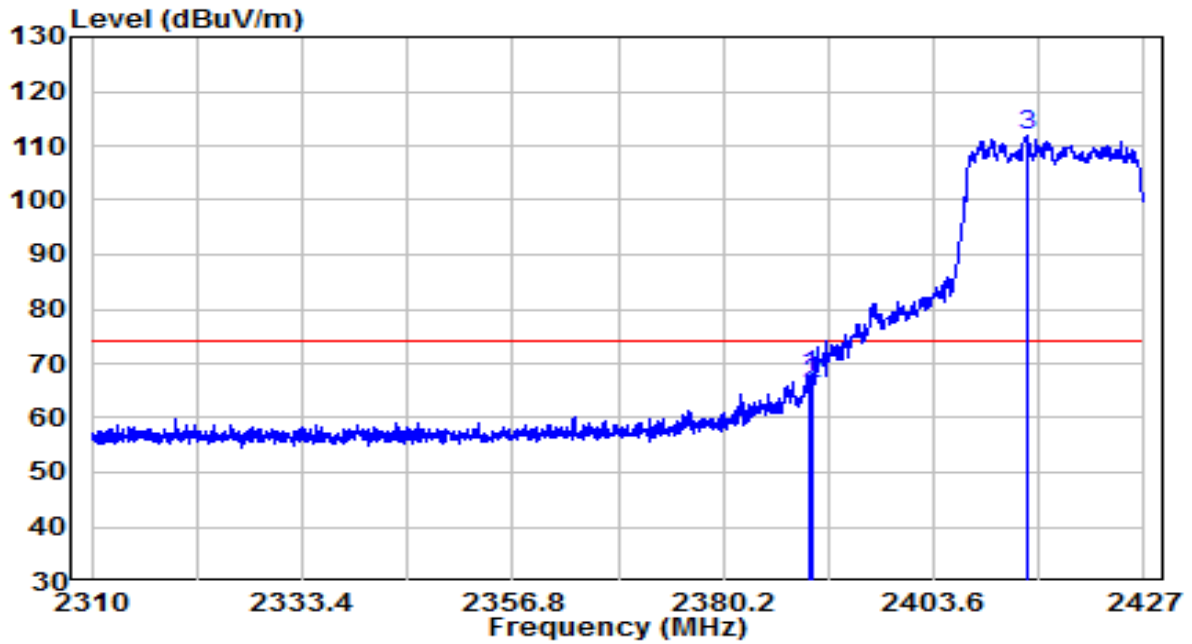


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.677	35.38	32.22	67.60	-6.40	74.00	Peak
2	2390.028	34.17	32.22	66.39	-7.61	74.00	Peak
3	* 2413.955	79.57	32.32	111.89	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2417MHz	Test Voltage	120V/60Hz

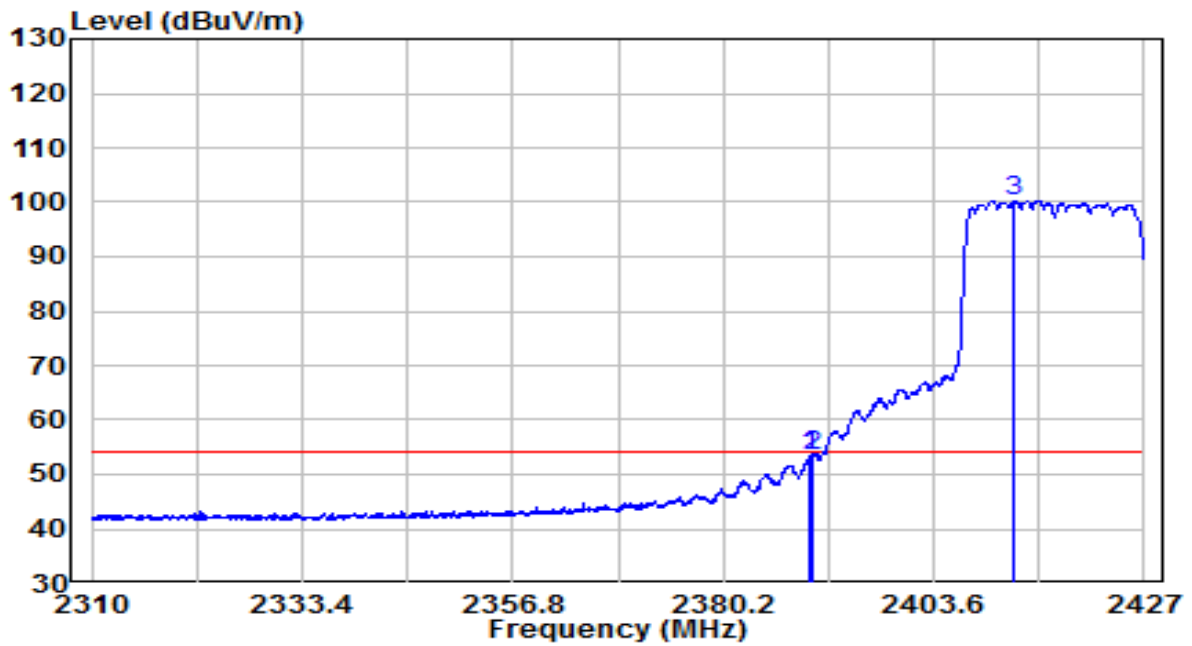


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.794	21.10	32.22	53.31	-0.69	54.00	Average
2	2390.028	21.02	32.22	53.24	-0.76	54.00	Average
3	* 2412.551	68.03	32.31	100.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437MHz	Test Voltage	120V/60Hz

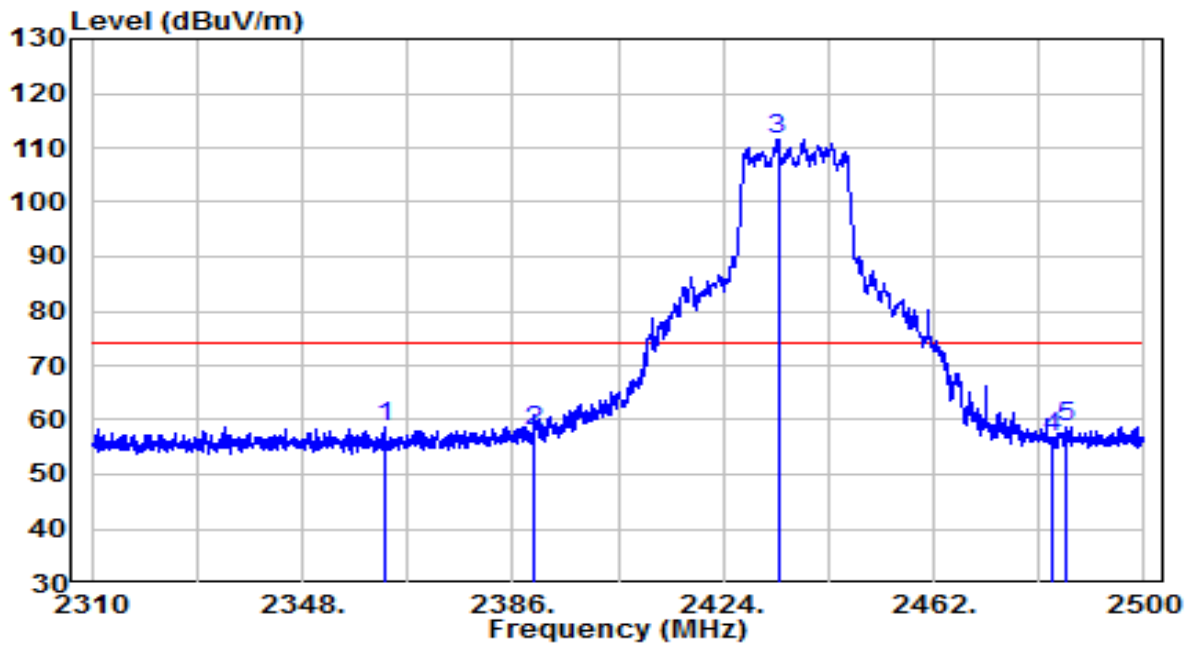


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2363.010	26.73	32.10	58.83	-15.17	74.00	Peak
2	2390.000	25.76	32.22	57.97	-16.03	74.00	Peak
3	* 2433.880	79.07	32.40	111.47	N/A	N/A	Peak
4	2483.500	24.13	32.61	56.74	-17.26	74.00	Peak
5	2485.750	26.19	32.62	58.81	-15.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437MHz	Test Voltage	120V/60Hz

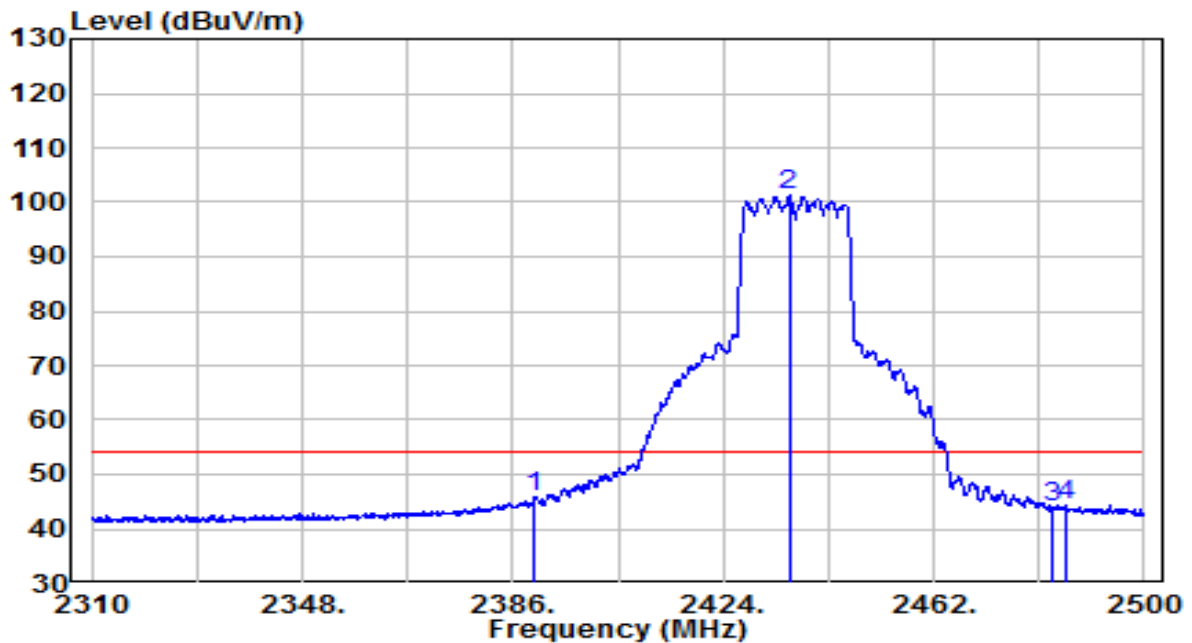


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	13.45	32.22	45.67	-8.33	54.00	Average
2	* 2435.875	68.76	32.41	101.17	N/A	N/A	Average
3	2483.500	11.18	32.61	43.79	-10.21	54.00	Average
4	2486.130	11.63	32.62	44.25	-9.75	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437MHz	Test Voltage	120V/60Hz

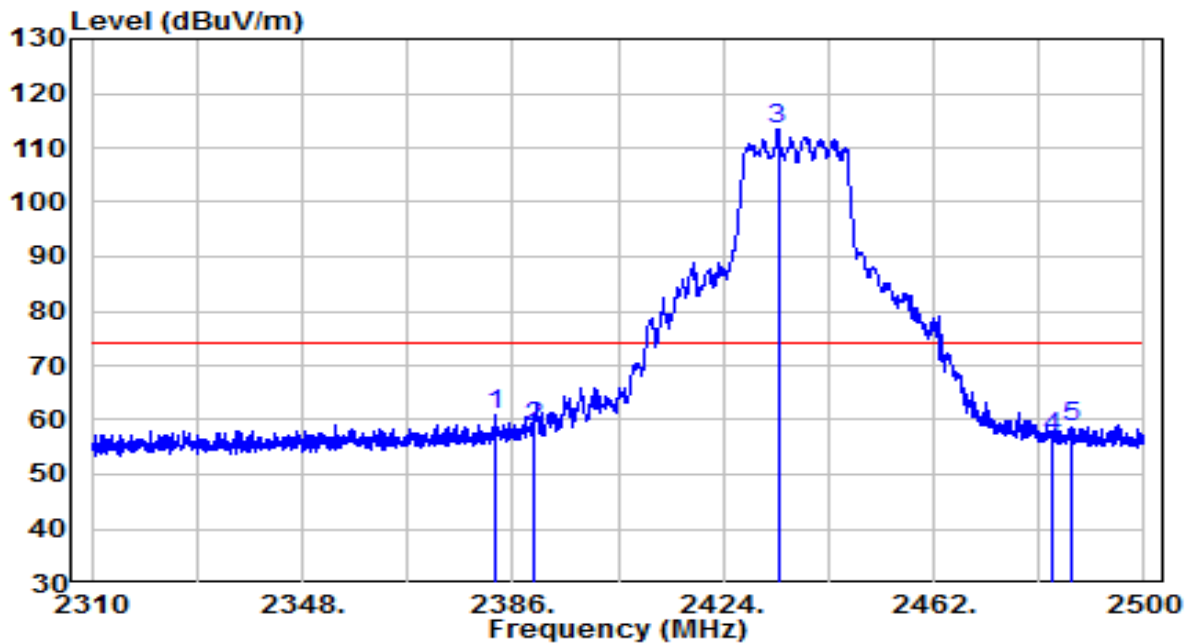


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2382.865	28.64	32.19	60.83	-13.17	74.00	Peak
2	2390.000	26.63	32.22	58.85	-15.15	74.00	Peak
3	* 2433.880	80.85	32.40	113.25	N/A	N/A	Peak
4	2483.500	24.15	32.61	56.76	-17.24	74.00	Peak
5	2486.700	26.20	32.62	58.82	-15.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437MHz	Test Voltage	120V/60Hz

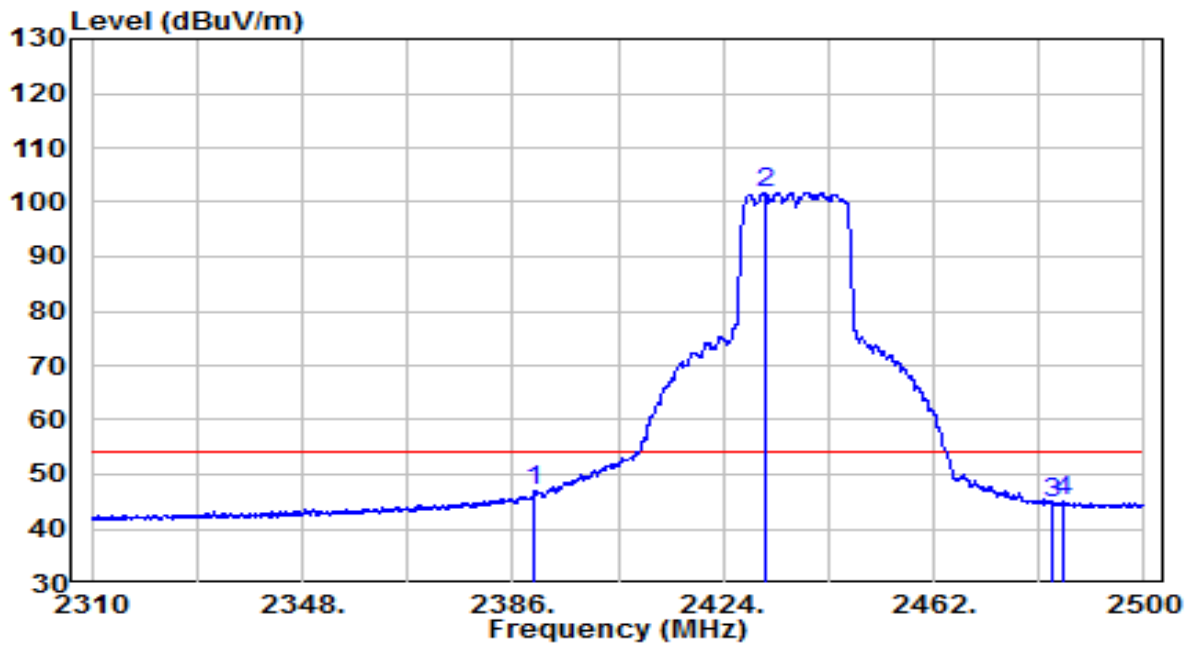


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	14.63	32.22	46.85	-7.15	54.00	Average
2	* 2431.410	69.35	32.39	101.74	N/A	N/A	Average
3	2483.500	12.13	32.61	44.74	-9.26	54.00	Average
4	2485.275	12.53	32.62	45.15	-8.85	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	120V/60Hz

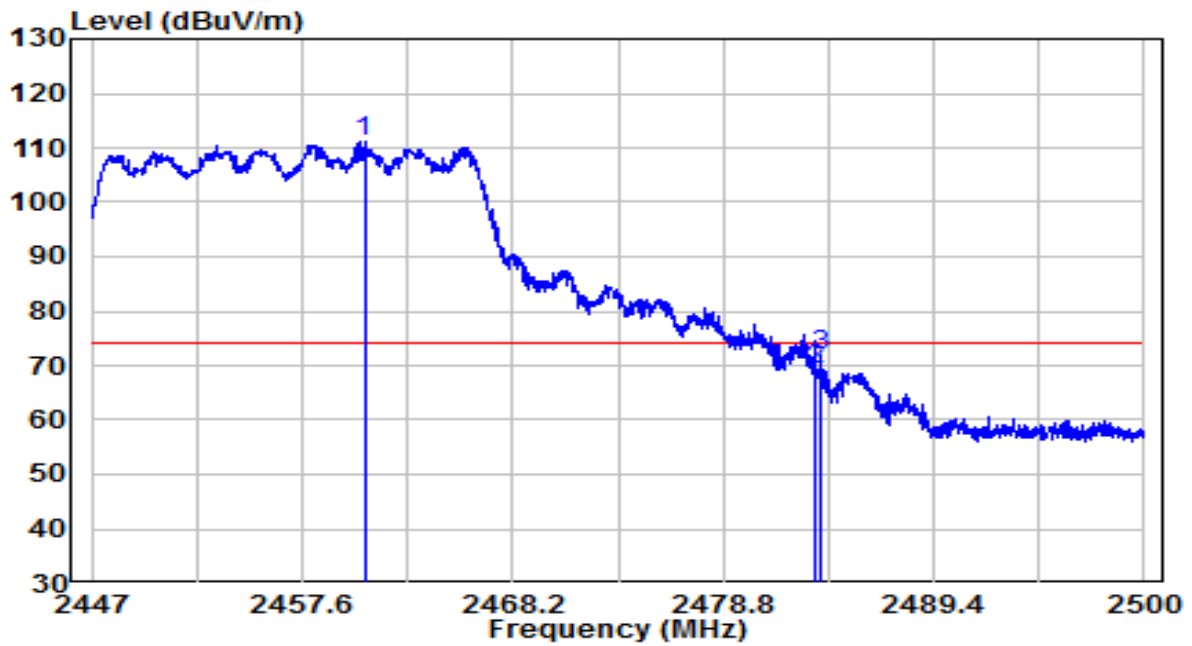


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	78.71	32.52	111.22	N/A	N/A	Peak
2		36.46	32.61	69.07	-4.93	74.00	Peak
3		39.30	32.61	71.91	-2.09	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	120V/60Hz

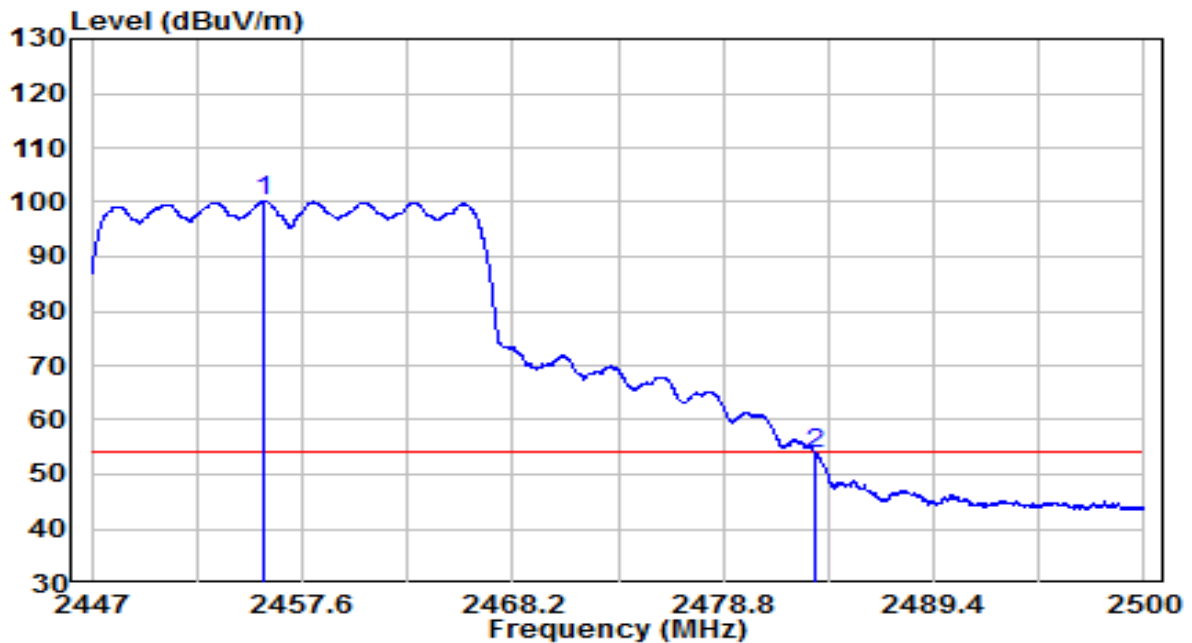


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	67.76	32.49	100.26	N/A	N/A	Average
2		21.13	32.61	53.74	-0.26	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	120V/60Hz

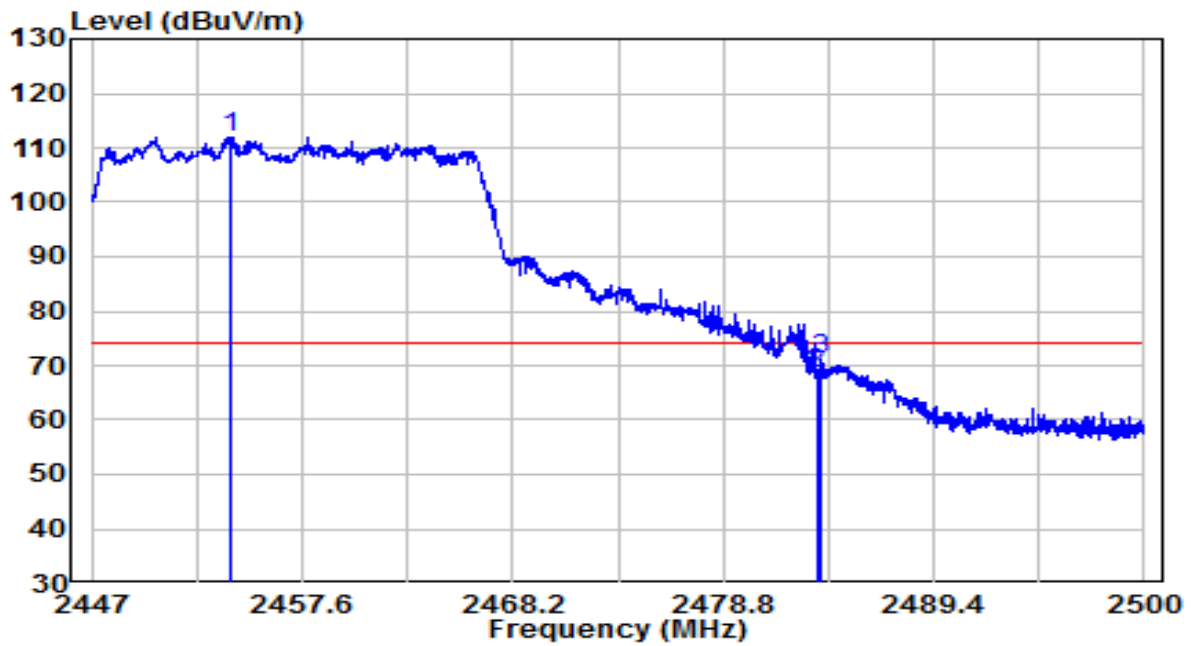


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	2453.969	79.53	32.49	112.01	N/A	N/A	Peak
2		2483.500	35.80	32.61	68.41	-5.59	74.00	Peak
3		2483.729	38.51	32.61	71.13	-2.87	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	120V/60Hz

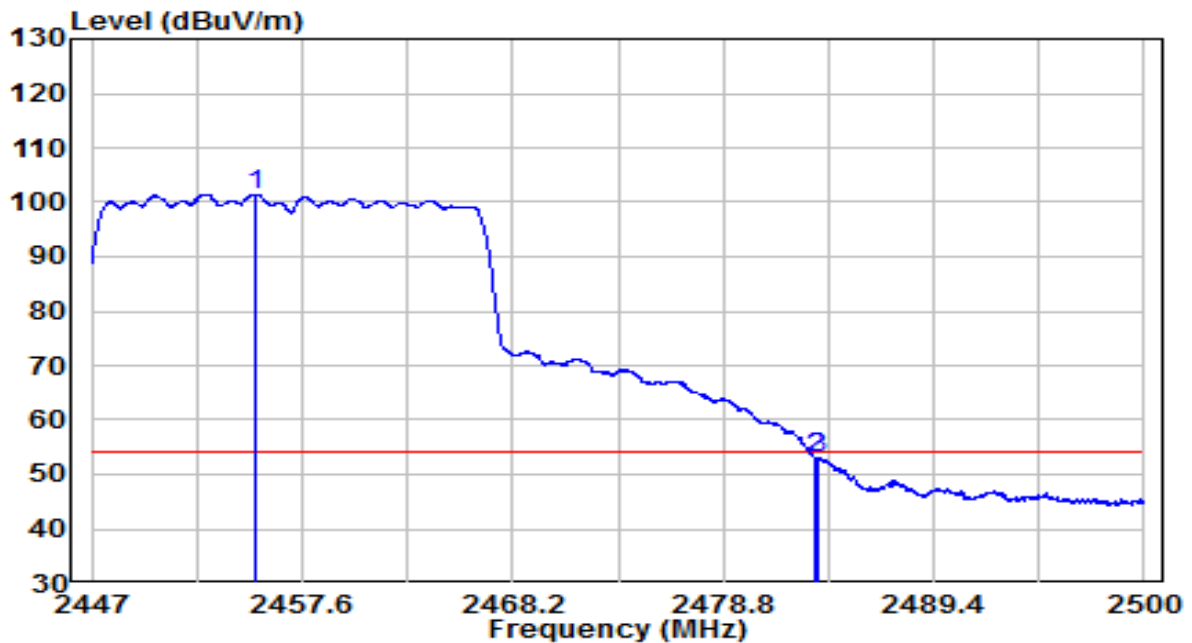


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	68.99	32.49	101.49	N/A	N/A	Average
2		20.53	32.61	53.14	-0.86	54.00	Average
3		20.44	32.61	53.05	-0.95	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	120V/60Hz

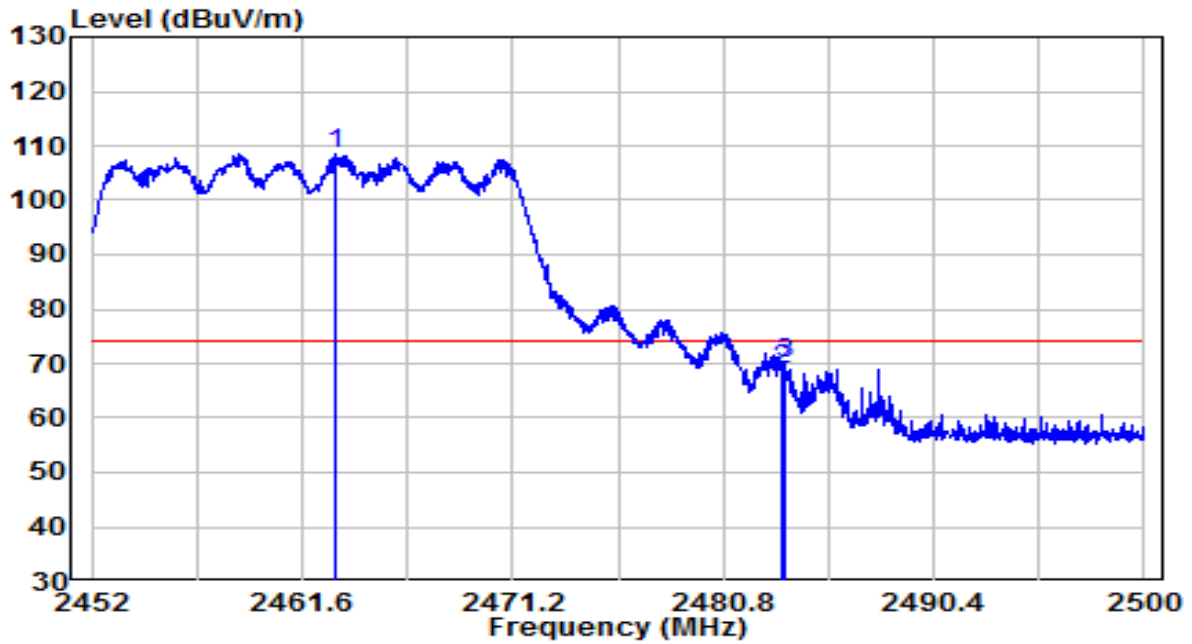


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 2463.160	76.14	32.53	108.67	N/A	N/A	Peak
2	2483.500	36.17	32.61	68.79	-5.21	74.00	Peak
3	2483.656	37.53	32.61	70.14	-3.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	120V/60Hz

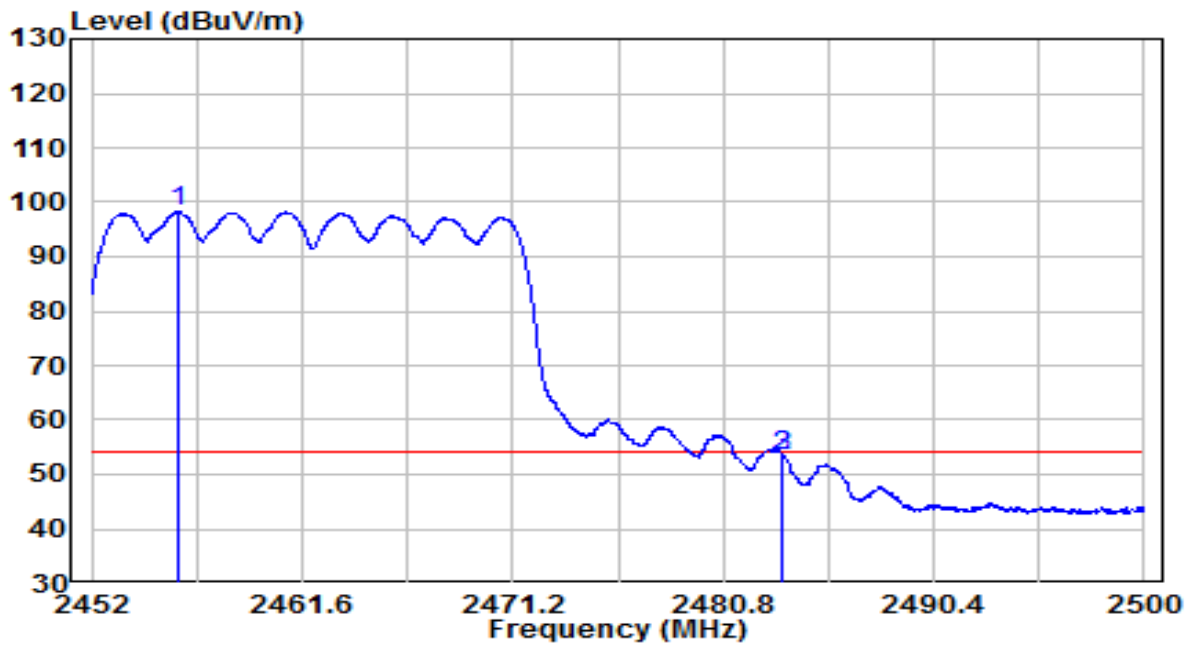


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	65.83	32.50	98.33	N/A	N/A	Average
2		20.92	32.61	53.53	-0.47	54.00	Average
3		20.84	32.61	53.45	-0.55	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	120V/60Hz

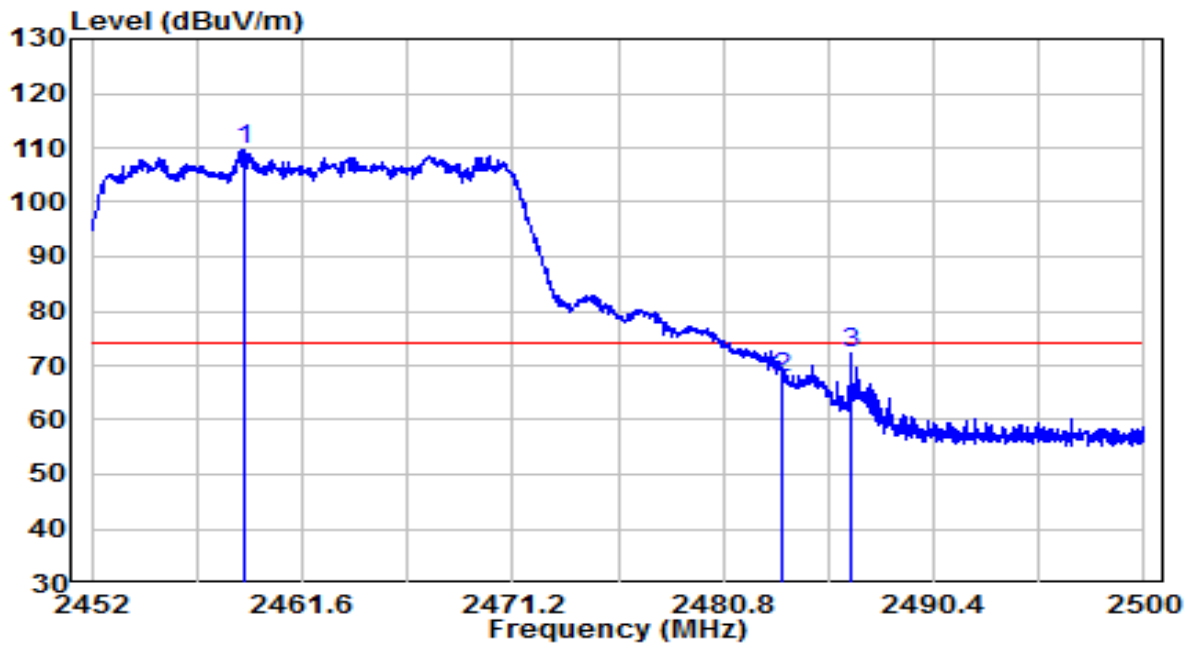


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	77.19	32.51	109.69	N/A	N/A	Peak
2		35.17	32.61	67.78	-6.22	74.00	Peak
3		39.56	32.62	72.18	-1.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	120V/60Hz

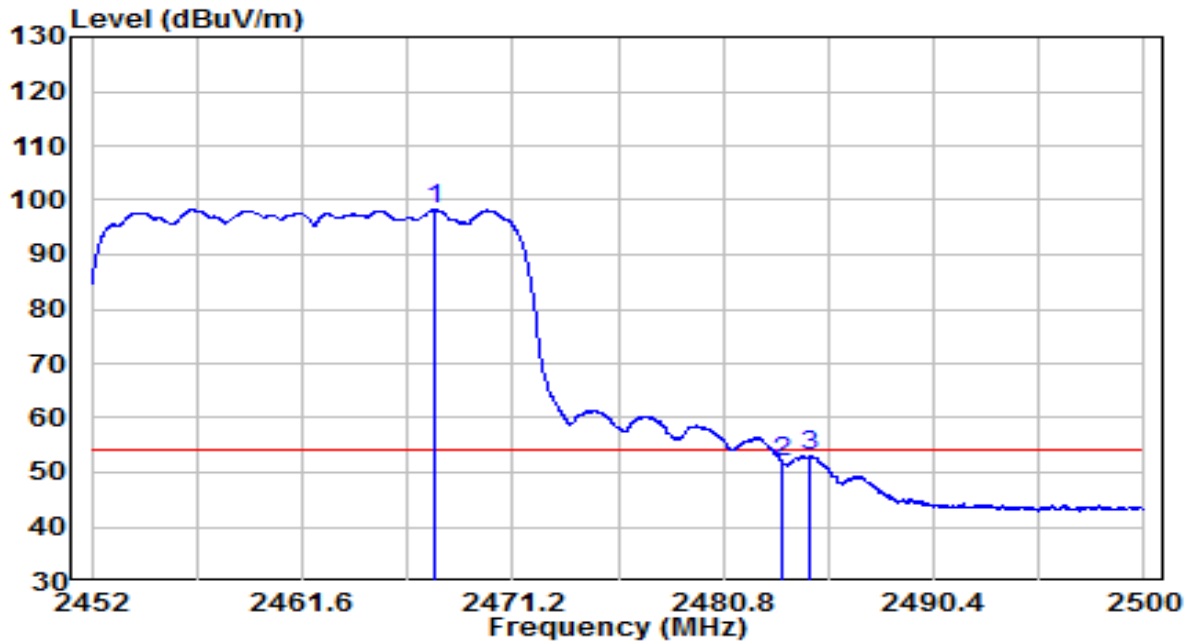


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	65.76	32.54	98.30	N/A	N/A	Average
2		19.18	32.61	51.79	-2.21	54.00	Average
3		20.38	32.62	53.00	-1.00	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	120V/60Hz

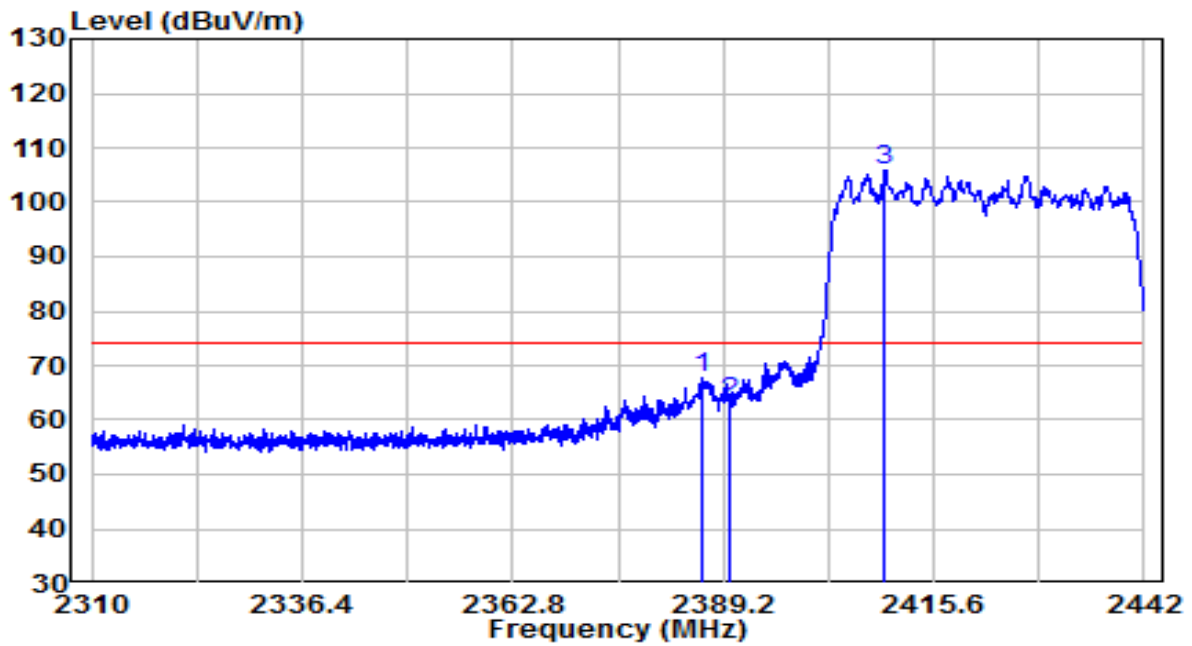


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2386.560	35.45	32.20	67.65	-6.35	74.00	Peak
2	2390.000	30.87	32.22	63.08	-10.92	74.00	Peak
3	* 2409.462	73.40	32.30	105.70	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	120V/60Hz

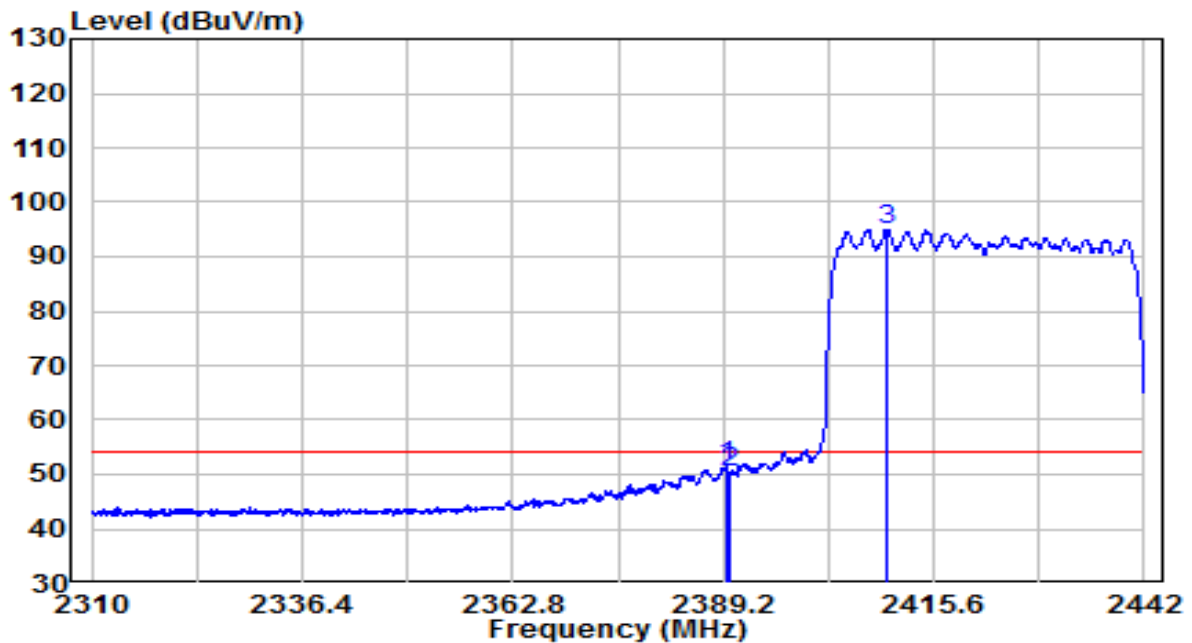


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.530	19.41	32.22	51.62	-2.38	54.00	Average
2	2390.000	18.04	32.22	50.26	-3.74	54.00	Average
3	* 2409.792	62.70	32.30	95.00	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	120V/60Hz

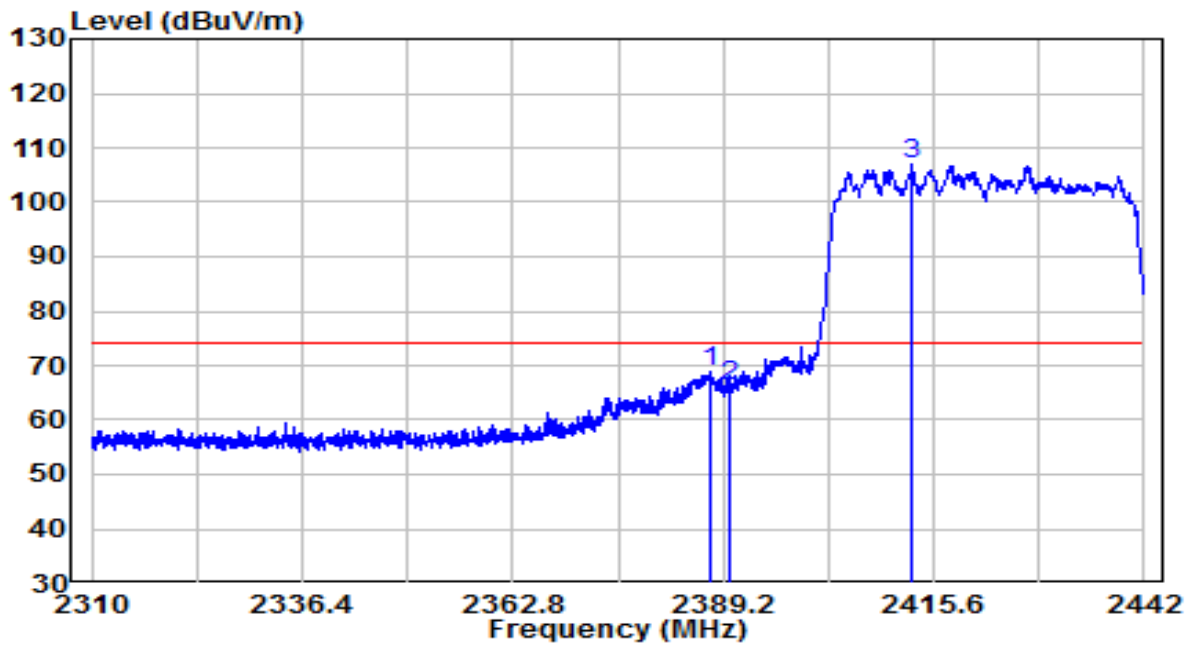


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2387.748	36.71	32.21	68.92	-5.08	74.00	Peak
2	2390.000	33.97	32.22	66.18	-7.82	74.00	Peak
3	* 2412.762	74.70	32.31	107.01	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	120V/60Hz

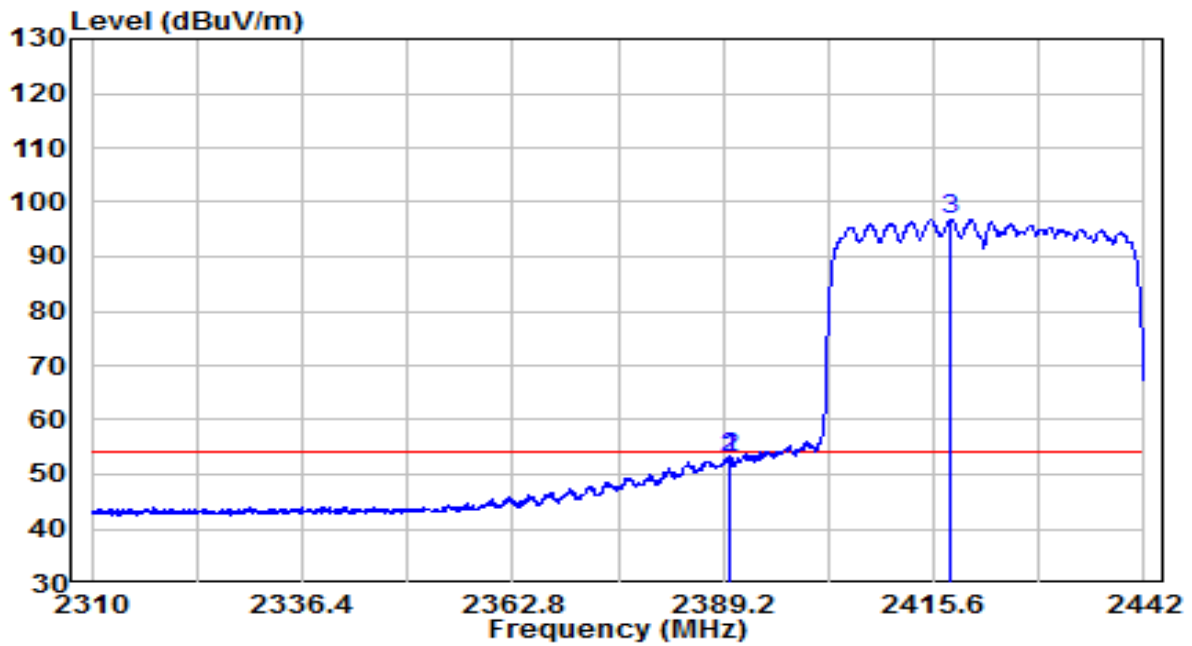


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.860	20.81	32.22	53.03	-0.97	54.00	Average
2	2390.000	20.93	32.22	53.15	-0.85	54.00	Average
3	* 2417.646	64.47	32.33	96.81	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz	Test Voltage	120V/60Hz

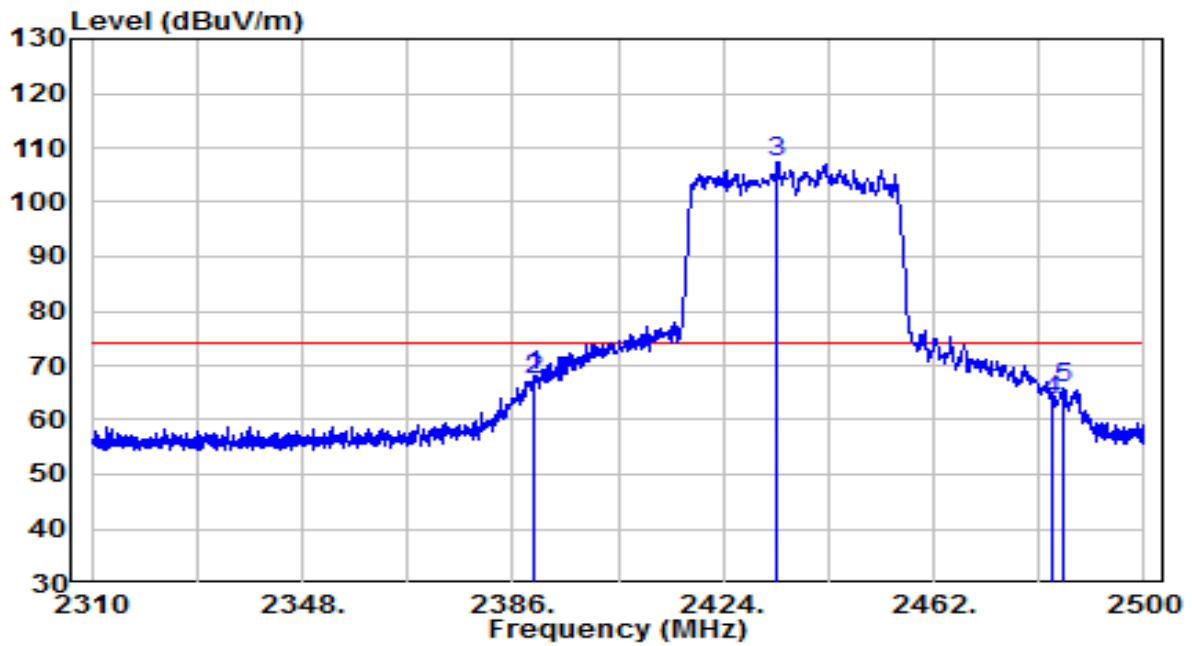


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.800	35.71	32.22	67.93	-6.07	74.00	Peak
2	2390.000	35.23	32.22	67.45	-6.55	74.00	Peak
3	* 2433.785	74.91	32.40	107.31	N/A	N/A	Peak
4	2483.500	30.96	32.61	63.57	-10.43	74.00	Peak
5	2485.560	33.31	32.62	65.93	-8.07	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz	Test Voltage	120V/60Hz

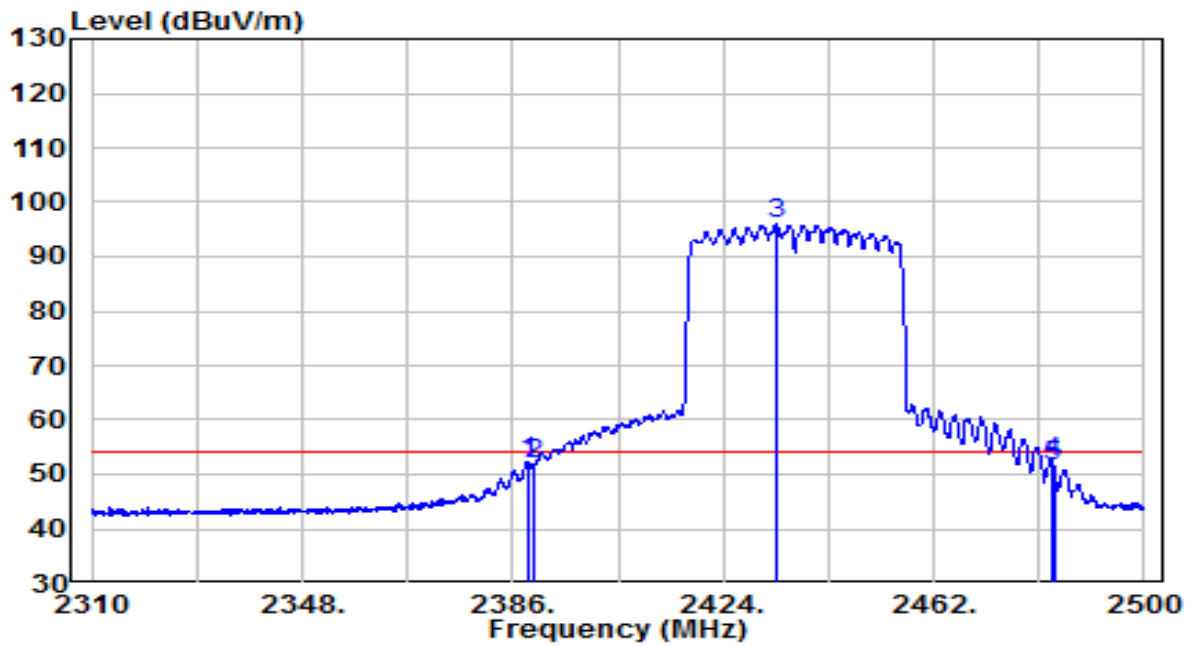


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.660	20.18	32.21	52.40	-1.60	54.00	Average
2	2390.000	19.54	32.22	51.76	-2.24	54.00	Average
3	* 2433.405	63.47	32.40	95.87	N/A	N/A	Average
4	2483.500	19.62	32.61	52.23	-1.77	54.00	Average
5	2483.660	19.02	32.61	51.63	-2.37	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz	Test Voltage	120V/60Hz

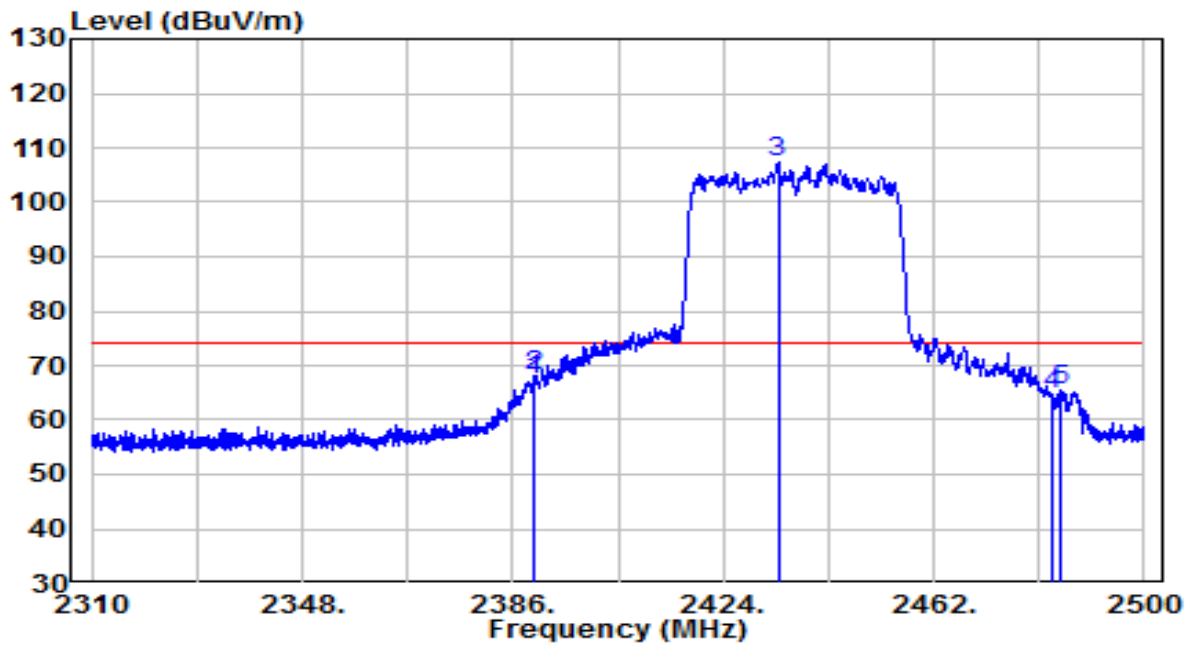


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.705	34.98	32.22	67.20	-6.80	74.00	Peak
2	2390.000	35.77	32.22	67.99	-6.01	74.00	Peak
3	* 2433.880	74.84	32.40	107.24	N/A	N/A	Peak
4	2483.500	31.98	32.61	64.59	-9.41	74.00	Peak
5	2484.895	32.67	32.62	65.29	-8.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz	Test Voltage	120V/60Hz

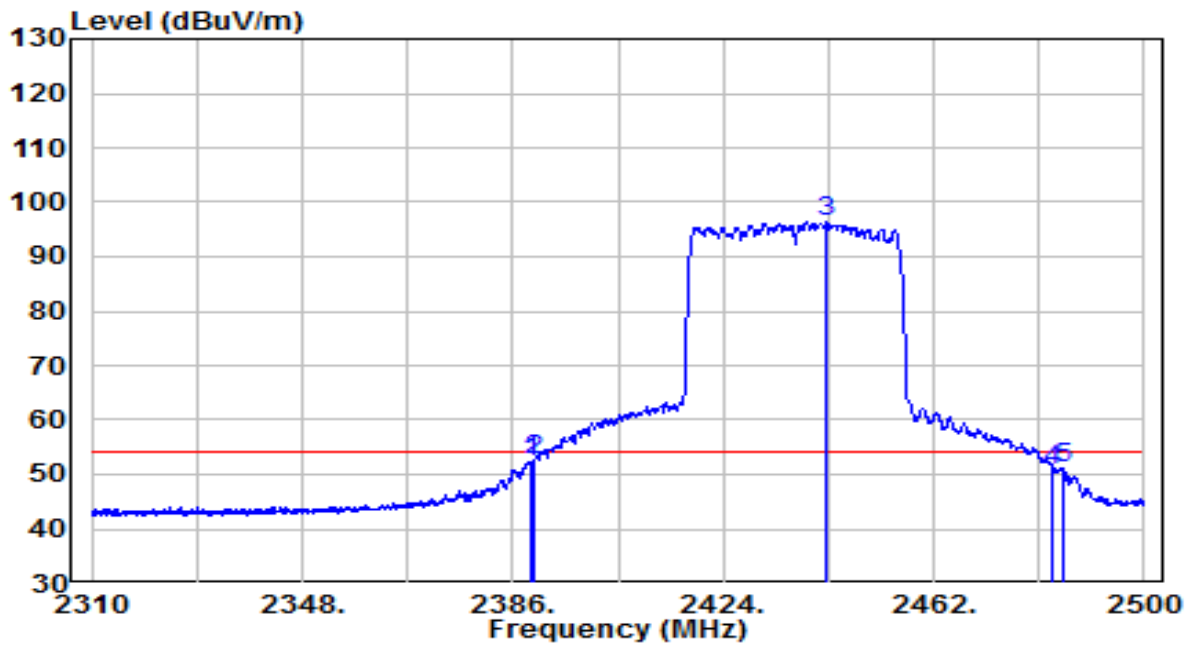


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.230	20.19	32.21	52.40	-1.60	54.00	Average
2	2390.000	20.56	32.22	52.78	-1.22	54.00	Average
3	* 2442.620	63.86	32.44	96.29	N/A	N/A	Average
4	2483.500	18.11	32.61	50.72	-3.28	54.00	Average
5	2485.180	18.54	32.62	51.16	-2.84	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	120V/60Hz

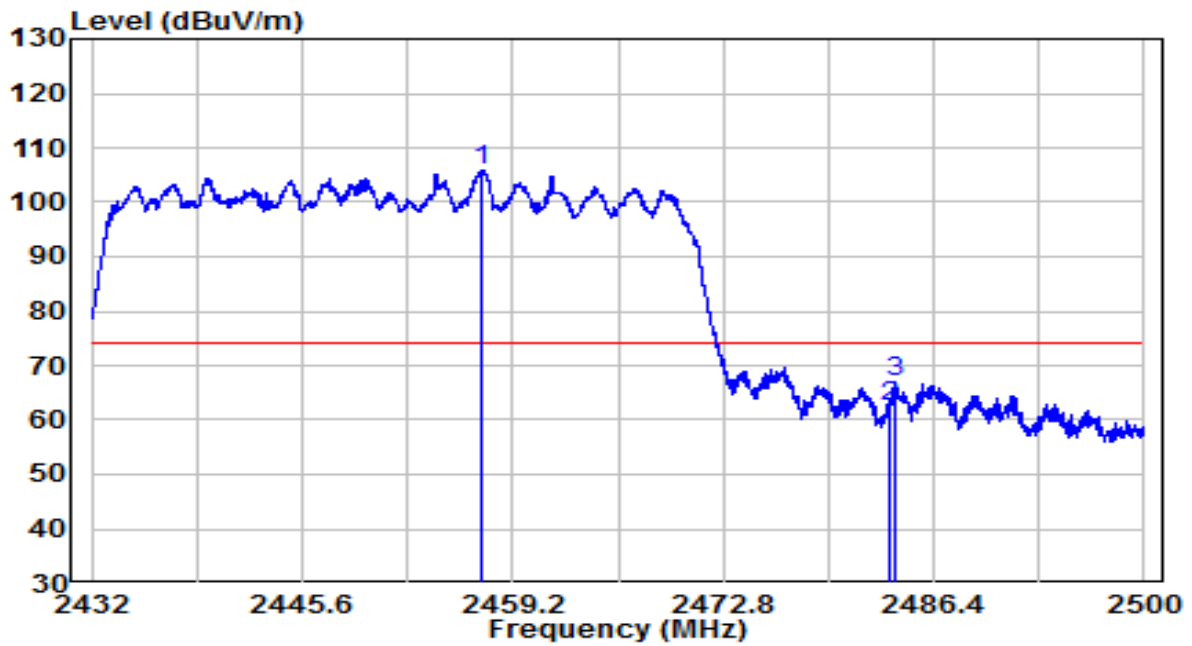


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	73.36	32.50	105.86	N/A	N/A	Peak
2		29.95	32.61	62.56	-11.44	74.00	Peak
3		34.33	32.61	66.94	-7.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	120V/60Hz

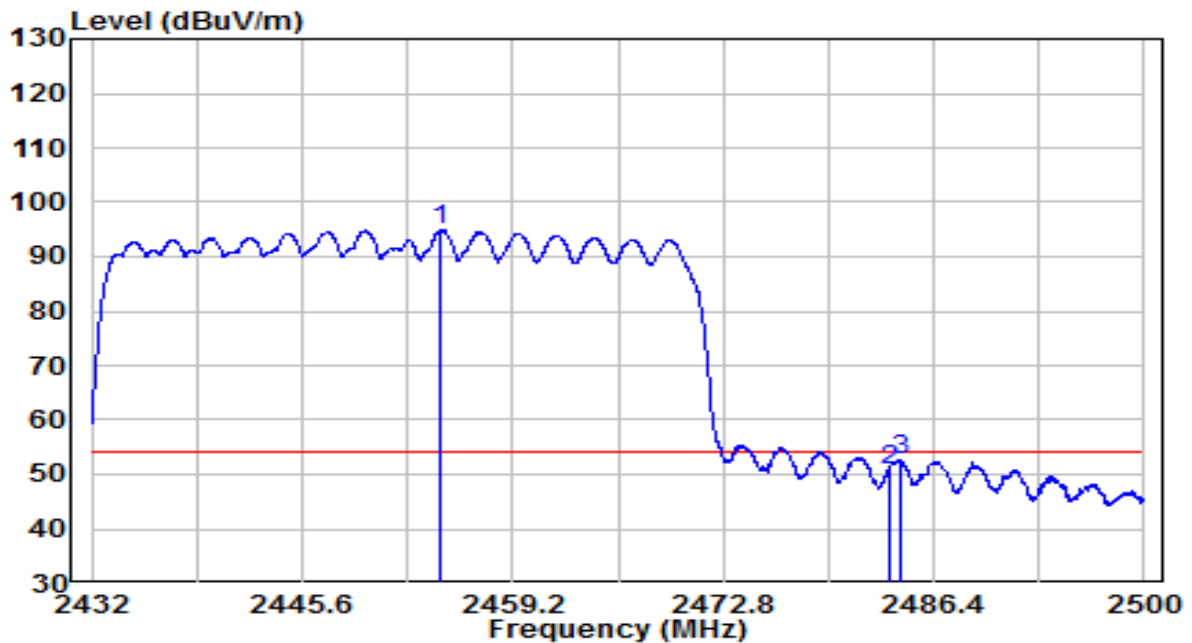


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	2454.474	62.30	32.49	94.79	N/A	N/A	Average
2		2483.500	18.23	32.61	50.84	-3.16	54.00	Average
3		2484.292	20.13	32.61	52.75	-1.25	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	120V/60Hz

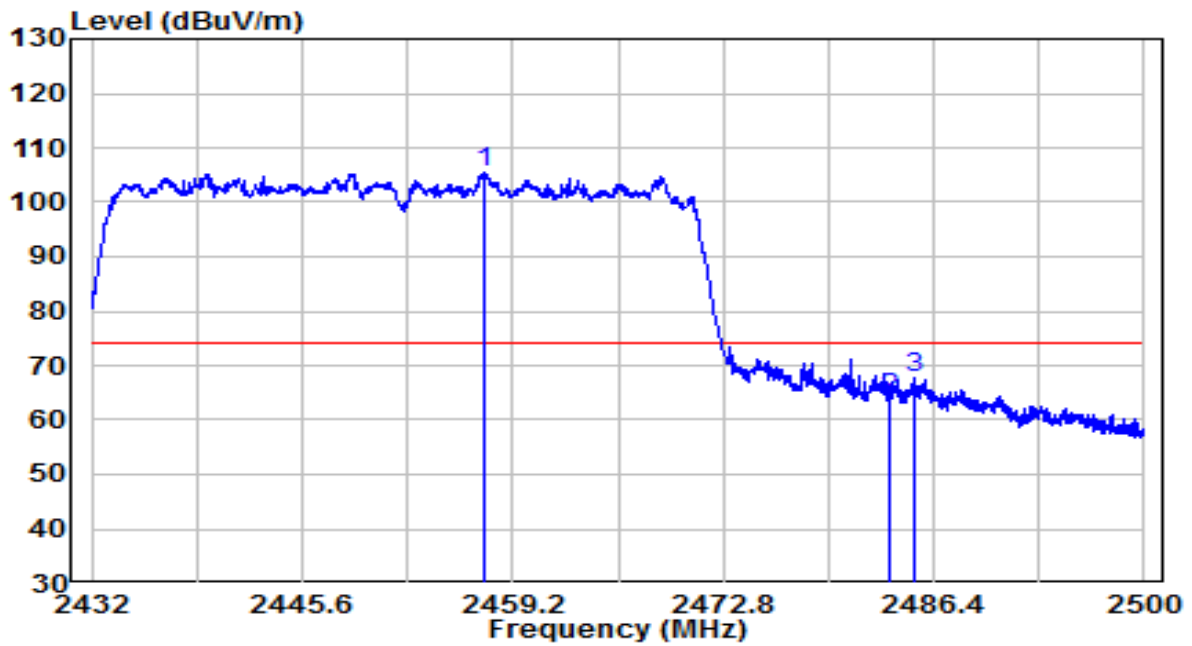


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	72.87	32.50	105.38	N/A	N/A	Peak
2		31.27	32.61	63.88	-10.12	74.00	Peak
3		35.26	32.62	67.88	-6.12	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-17
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	23.6°C/41.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	120V/60Hz

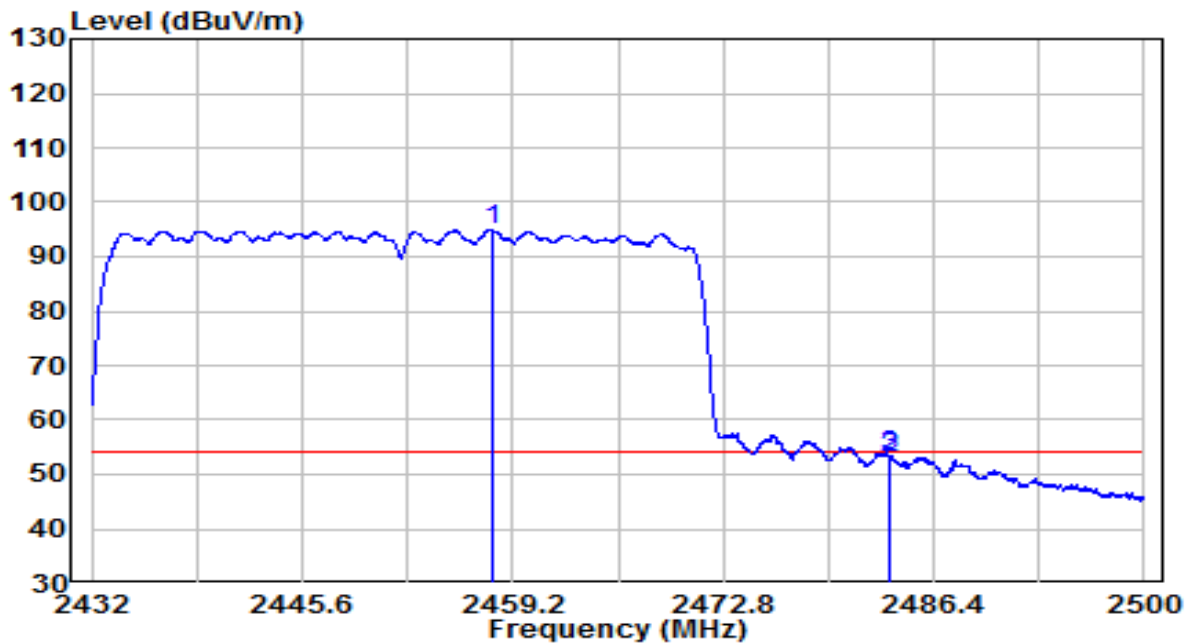

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	62.51	32.50	95.02	N/A	N/A	Average
2		20.60	32.61	53.21	-0.79	54.00	Average
3		20.71	32.61	53.32	-0.68	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

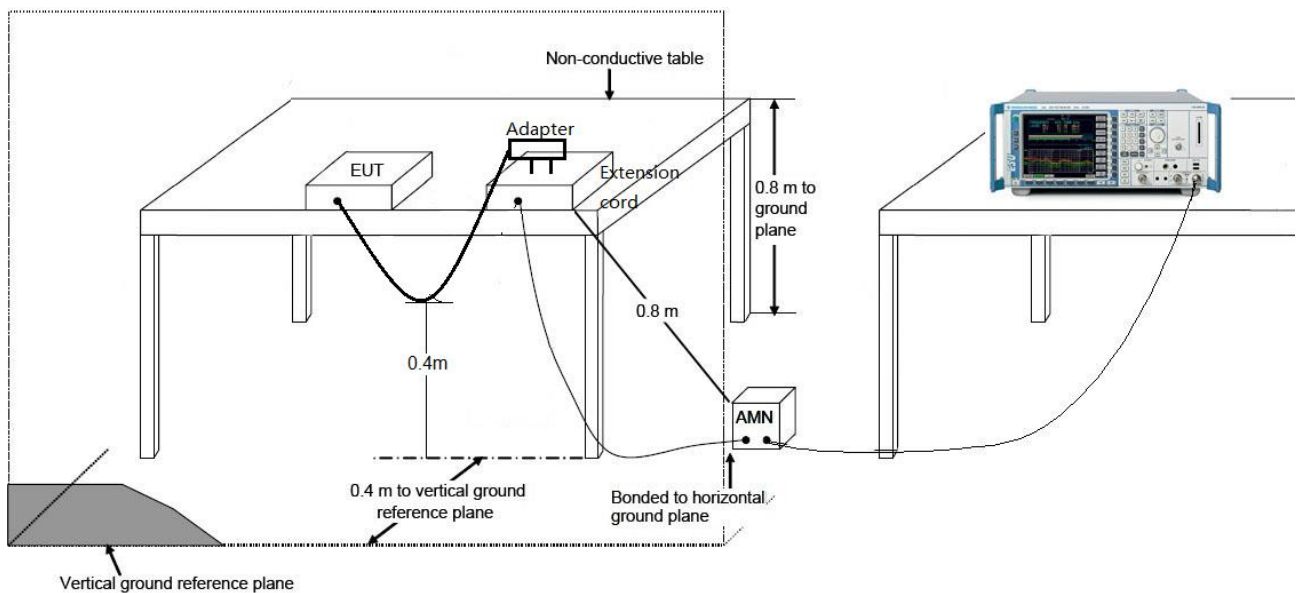

7.8.3. Test Result

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	CE_ENV216-L1 (Filter ON)_2021	Temp. / Humidity	25.4°C /69%
Polarity	Line1	Site / Test Engineer	SR2 / Kevin Ker
Test Mode	1	Test Voltage	120V/60Hz

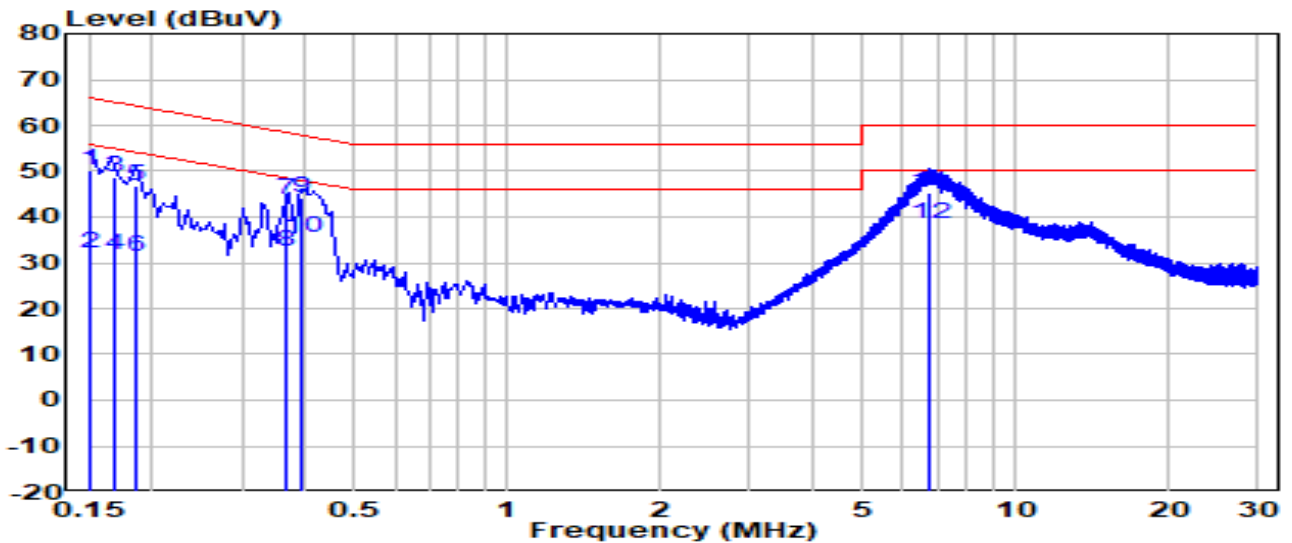


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.150	40.49	9.61	50.10	-15.90	66.00	QP
2	0.150	22.29	9.61	31.90	-24.10	56.00	Average
3	0.169	38.89	9.61	48.50	-16.51	65.01	QP
4	0.169	22.09	9.61	31.70	-23.31	55.01	Average
5	0.186	37.09	9.61	46.70	-17.51	64.21	QP
6	0.186	21.79	9.61	31.40	-22.81	54.21	Average
7	0.369	33.99	9.62	43.61	-14.91	58.52	QP
8	0.369	22.89	9.62	32.51	-16.01	48.52	Average
9	0.393	34.60	9.62	44.22	-13.77	57.99	QP
10	0.393	26.00	9.62	35.62	-12.37	47.99	Average
11	* 6.770	35.58	9.78	45.36	-14.64	60.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2021-11-19
Factor	CE_ENV216-N (Filter ON)_2021	Temp. / Humidity	25.4°C /69%
Polarity	Neutral	Site / Test Engineer	SR2 / Kevin Ker
Test Mode	1	Test Voltage	120V/60Hz

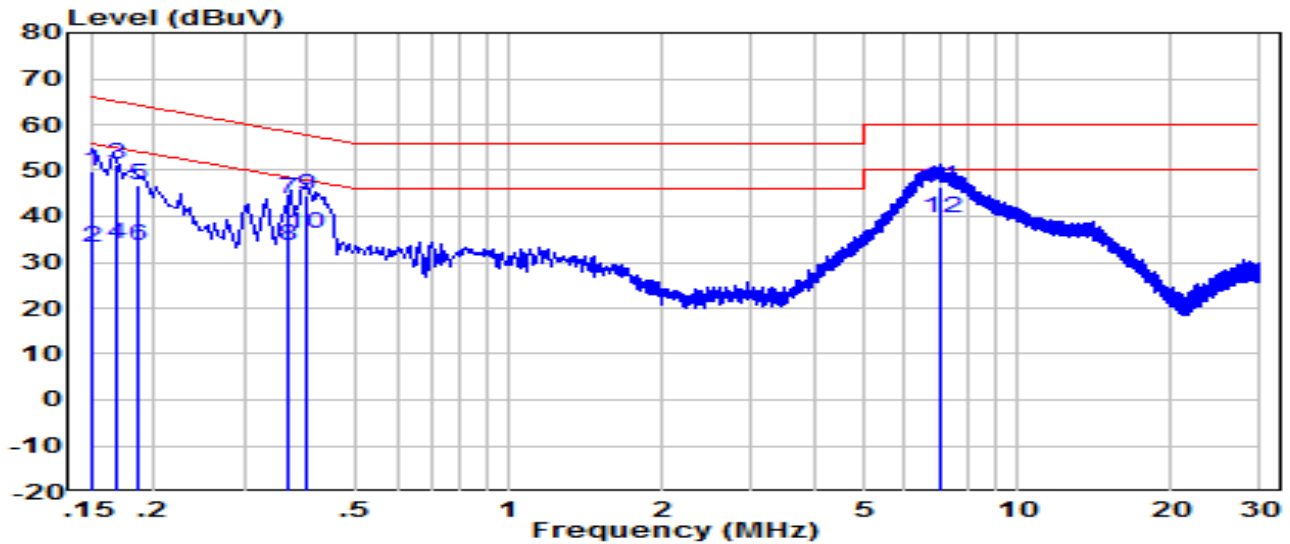

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.151	40.02	9.62	49.64	-16.30	65.94	QP
2	0.151	23.42	9.62	33.04	-22.90	55.94	Average
3	0.168	41.72	9.62	51.34	-13.73	65.07	QP
4	0.168	24.42	9.62	34.04	-21.03	55.07	Average
5	0.186	37.13	9.61	46.74	-17.46	64.20	QP
6	0.186	24.03	9.61	33.64	-20.56	54.20	Average
7	0.369	34.33	9.62	43.95	-14.58	58.53	QP
8	0.369	24.03	9.62	33.65	-14.88	48.53	Average
9	0.396	34.93	9.62	44.55	-13.39	57.94	QP
10	0.396	26.53	9.62	36.15	-11.79	47.94	Average
11	7.046	36.59	9.81	46.40	-13.60	60.00	QP
12	* 7.046	29.99	9.81	39.80	-10.20	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in complied with Part 15C of the FCC Rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2109TW0010-Setup Photo" file.

Appendix B - External Photograph

Refer to "2109TW0010-External Photo" file.

Appendix C - Internal Photograph

Refer to "2109TW0010-Internal Photo" file.