



802.11 n40 CH06 (2437MHz)



802.11 n40 CH06 (2437MHz)

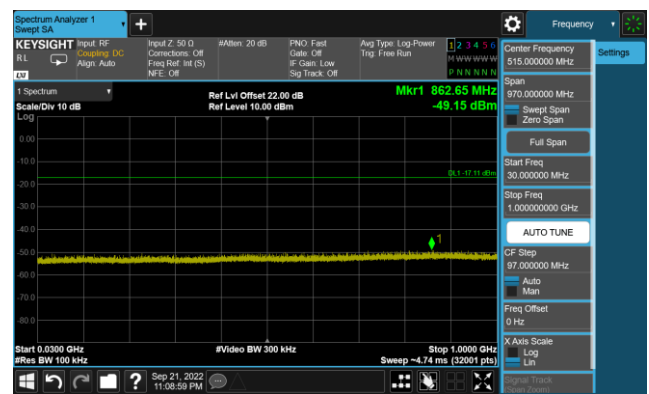


802.11 n40 CH06 (2437MHz)

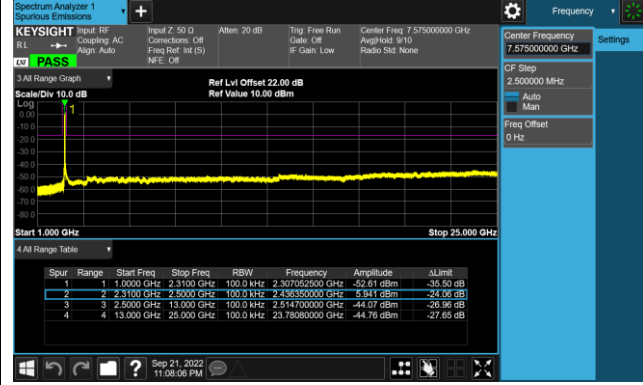


802.11 n40 CH09 (2452MHz)














802.11 n40 CH09 (2452MHz)





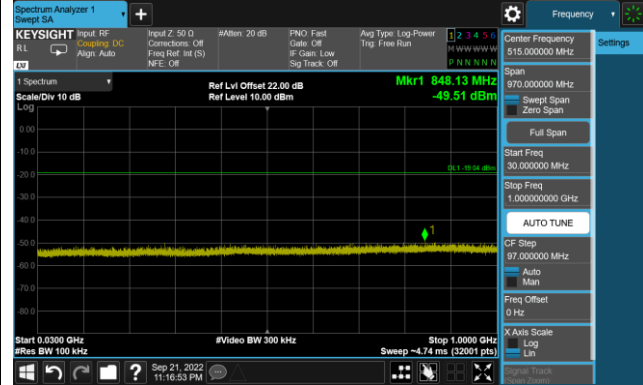


802.11 n40 CH09 (2452MHz)

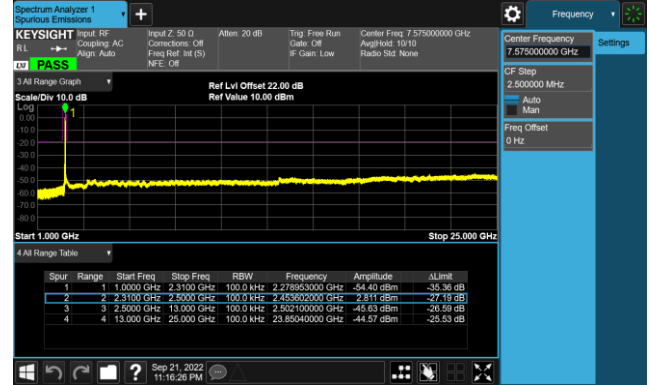

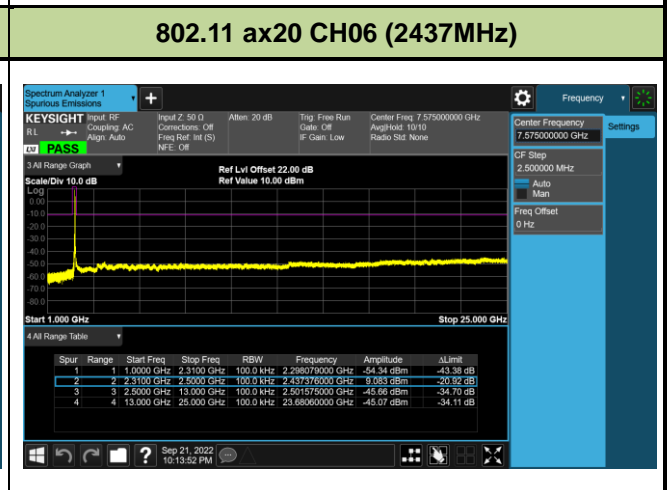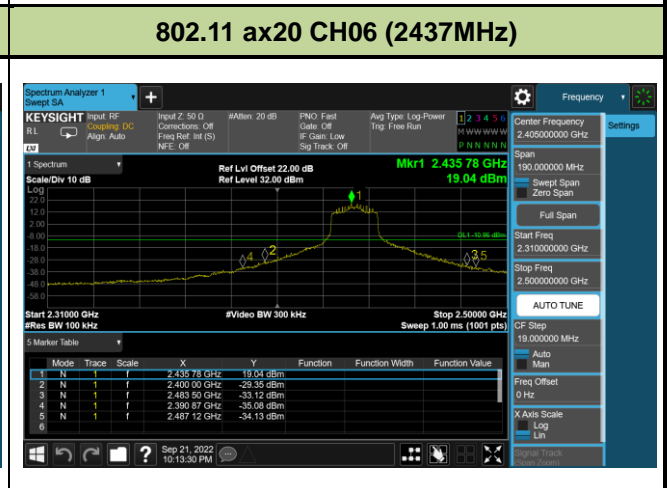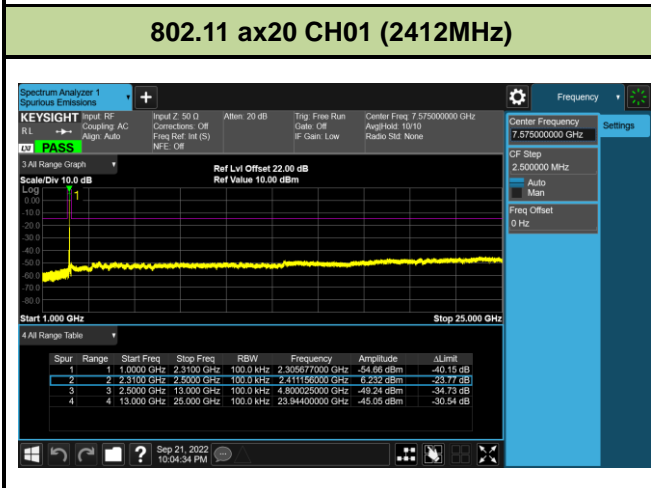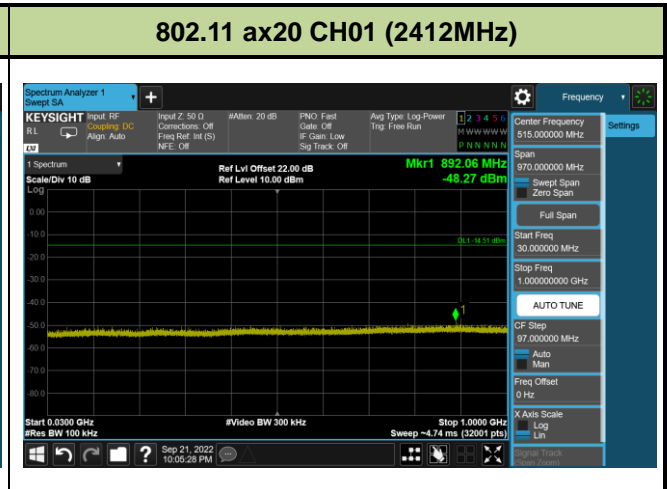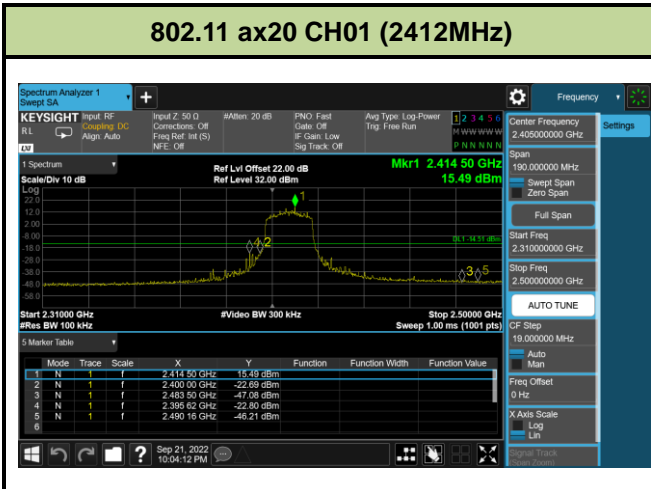

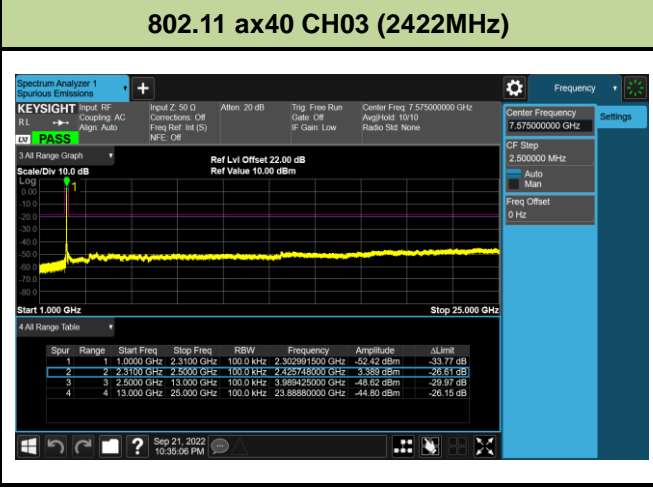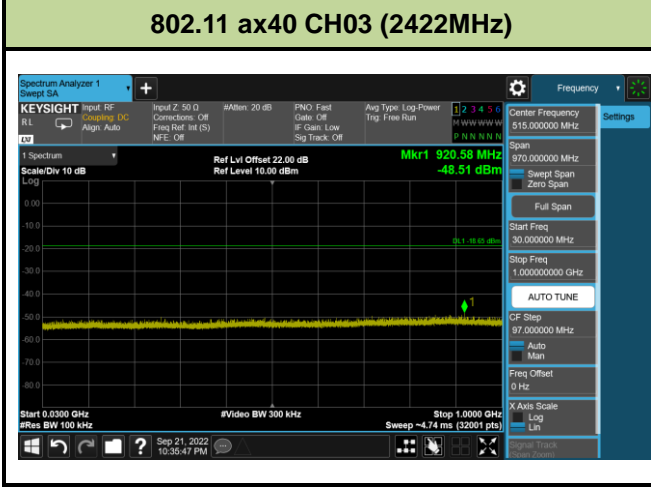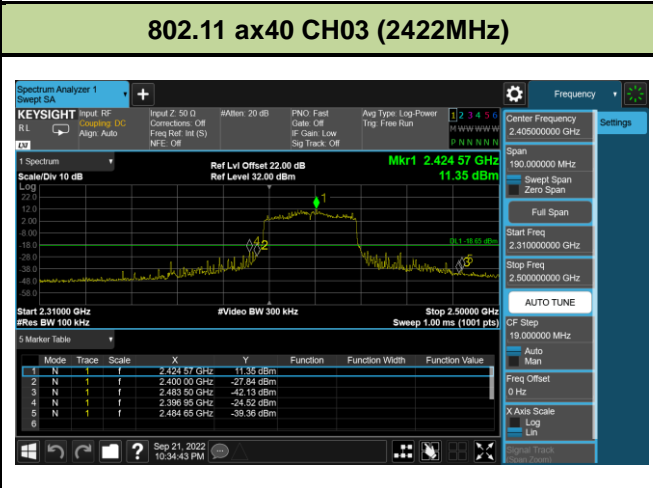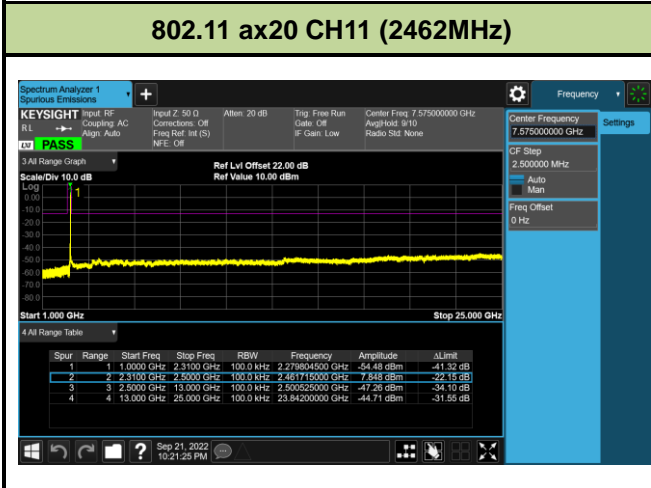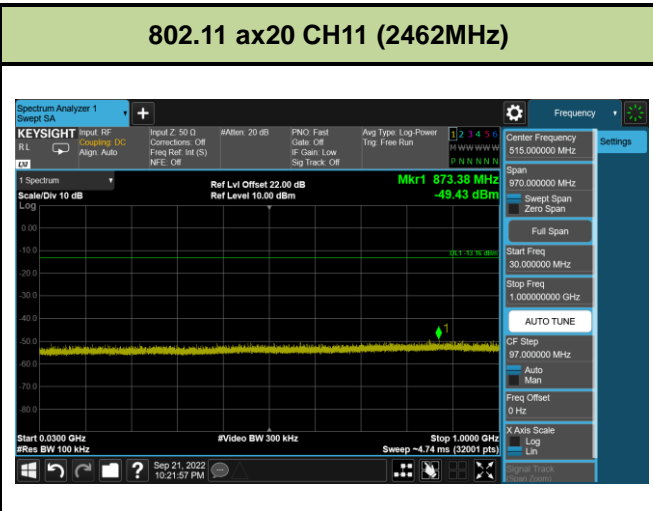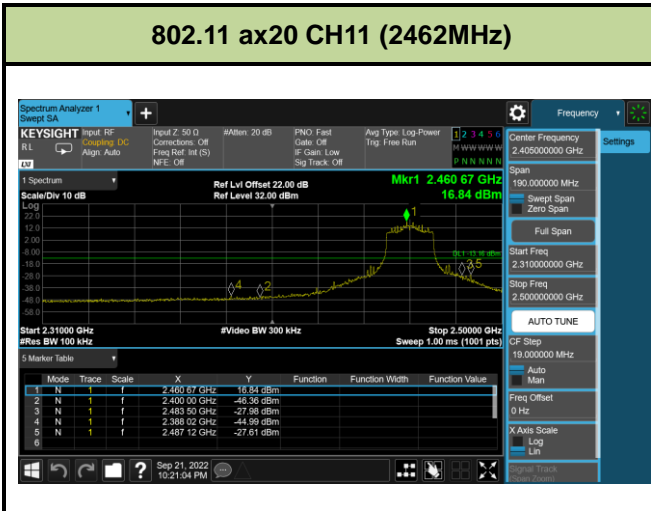

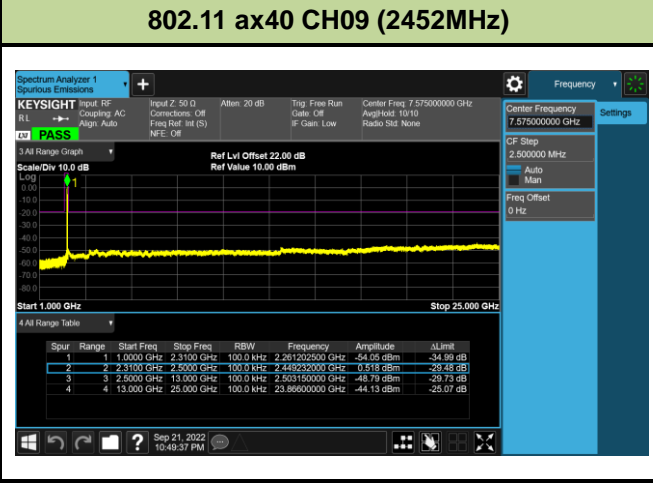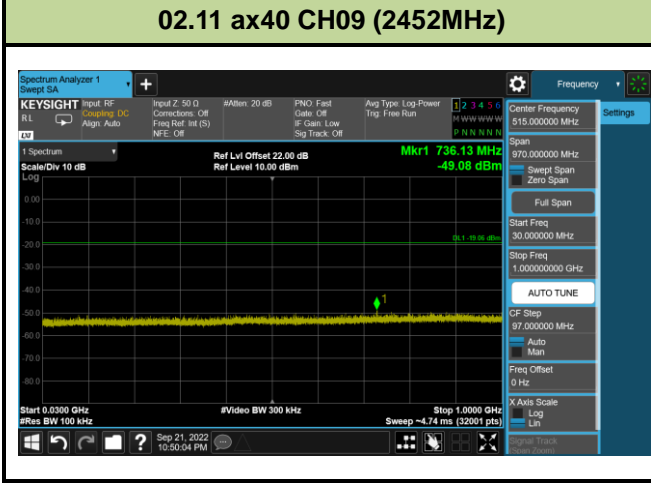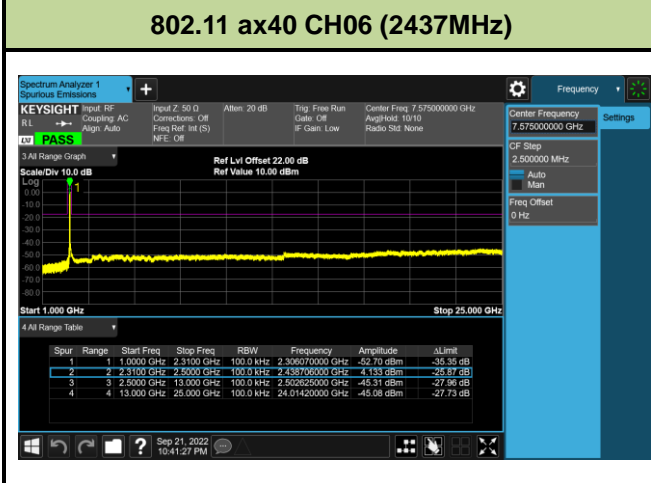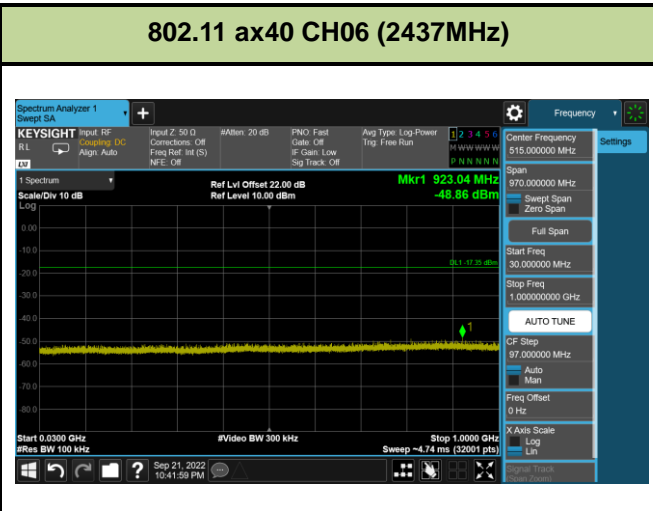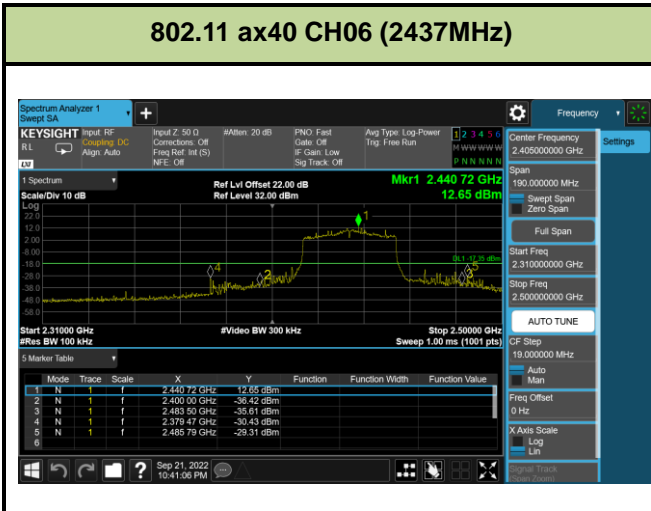

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

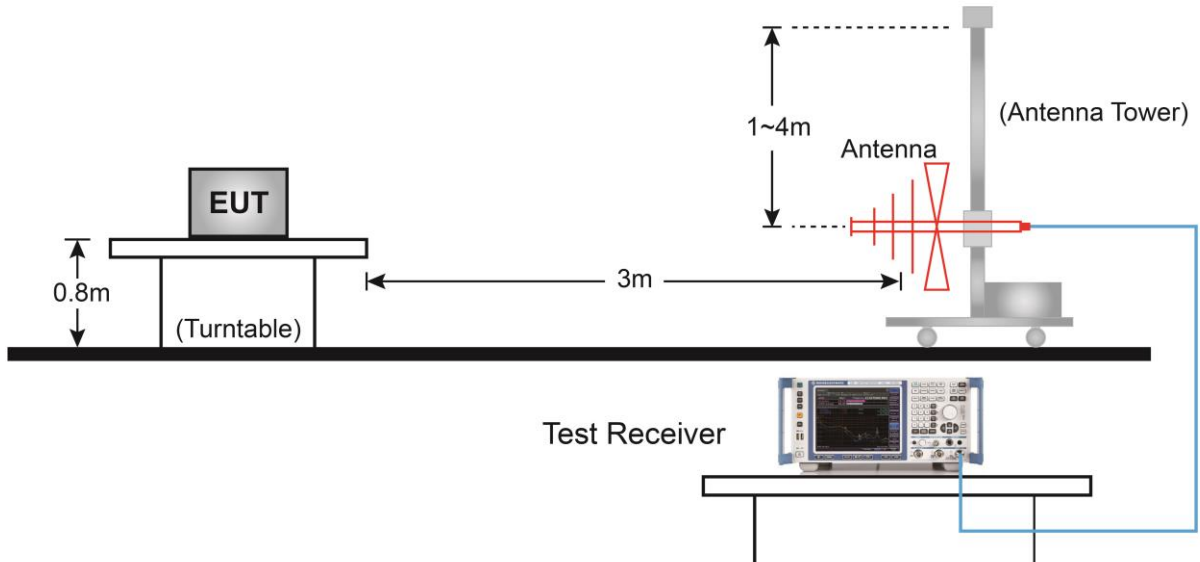


Above 1GHz Test Setup:

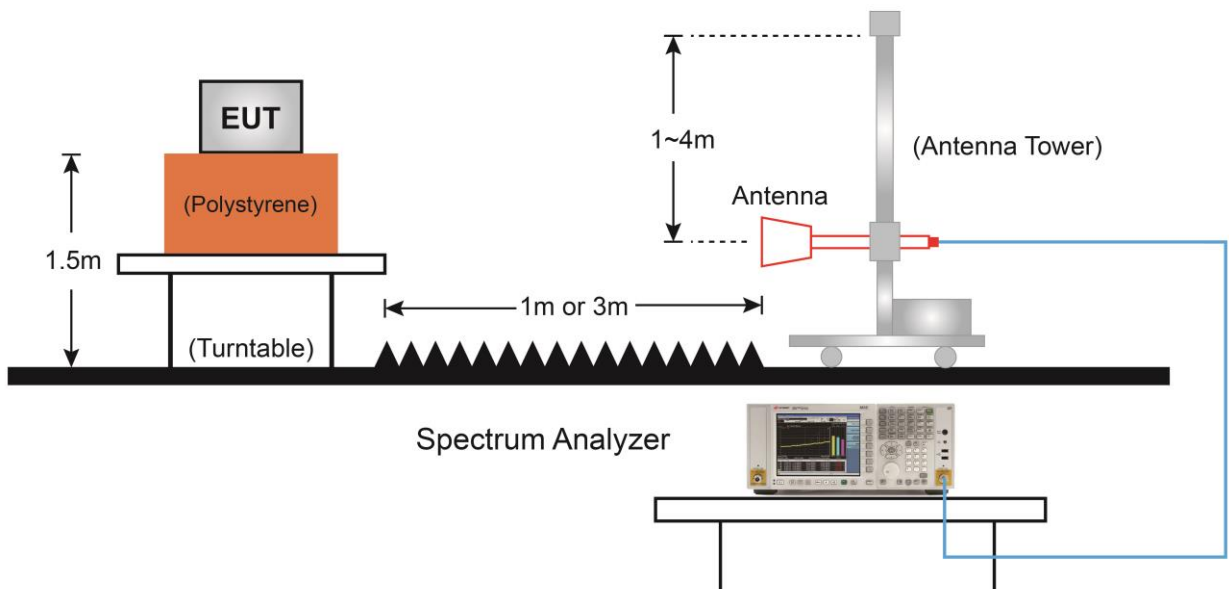

7.6.5. Test Result

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	VULB 9162	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

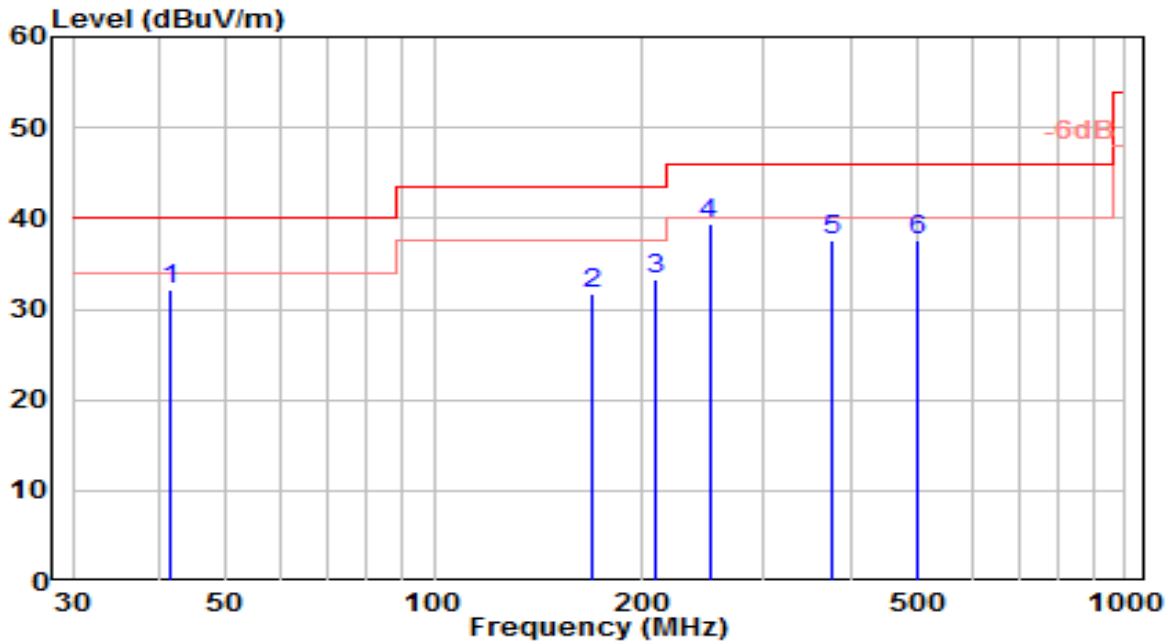


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	41.640	11.34	20.79	32.13	-7.87	40.00	150	265	QP
2	169.680	15.08	16.62	31.70	-11.80	43.50	150	135	QP
3	209.450	14.67	18.64	33.31	-10.19	43.50	100	95	QP
4	* 250.190	18.63	20.83	39.46	-6.54	46.00	150	100	QP
5	375.320	14.09	23.50	37.60	-8.40	46.00	100	320	QP
6	500.450	11.92	25.73	37.65	-8.35	46.00	150	50	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	VULB 9162	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

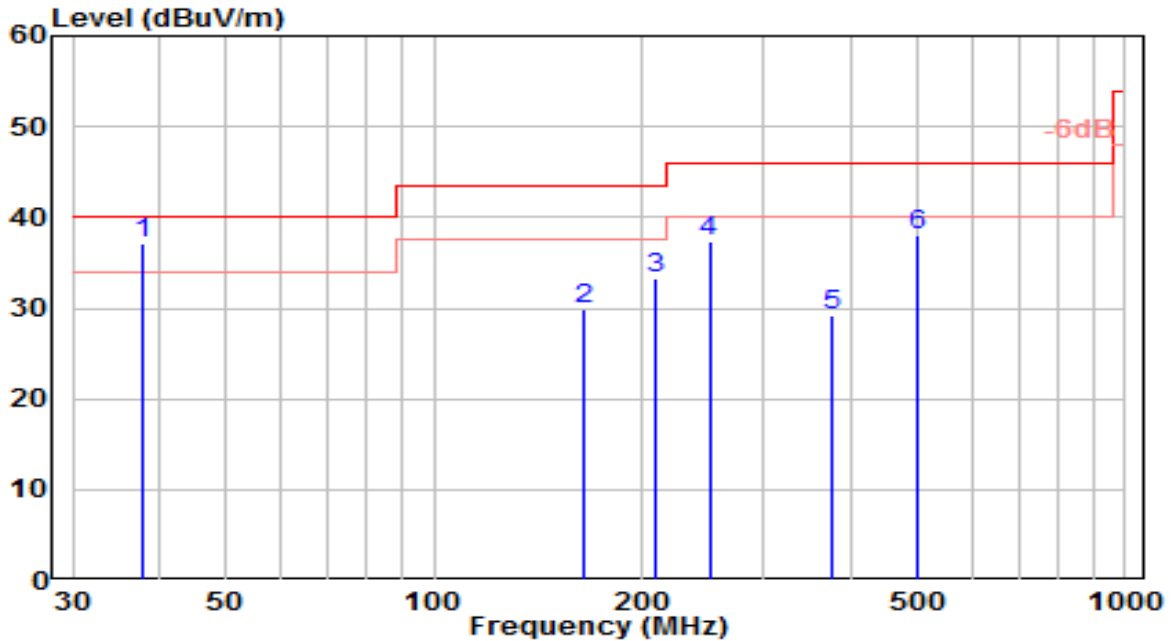


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 37.760	17.50	19.59	37.09	-2.91	40.00	100	0	QP
2	164.830	13.39	16.46	29.85	-13.65	43.50	100	25	QP
3	209.450	14.59	18.64	33.23	-10.27	43.50	100	50	QP
4	250.190	16.57	20.83	37.40	-8.60	46.00	100	360	QP
5	375.320	5.62	23.50	29.12	-16.88	46.00	100	40	QP
6	500.450	12.39	25.73	38.11	-7.89	46.00	100	75	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

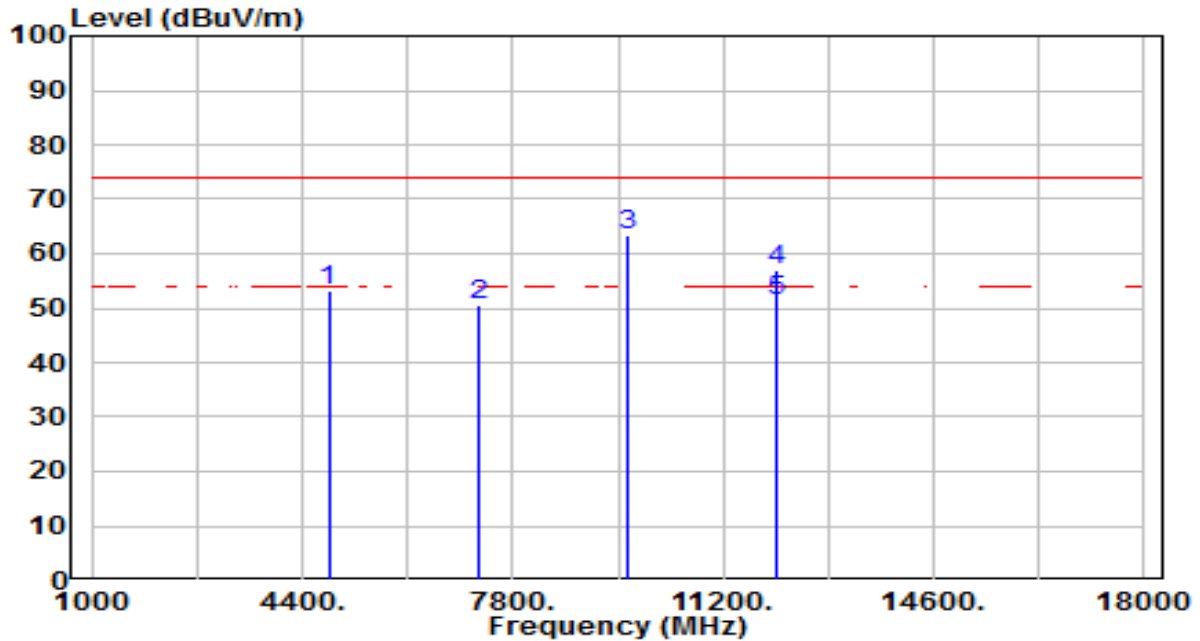


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	53.01	0.25	53.26	-20.74	74.00	200	235	Peak
2	7236.000	44.61	5.81	50.43	-23.57	74.00	200	255	Peak
3	9648.000	57.90	5.32	63.22	-10.78	74.00	200	90	Peak
4	* 12060.000	51.17	5.99	57.15	-16.85	74.00	100	0	Peak
5	* 12060.000	45.33	5.99	51.32	-2.68	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

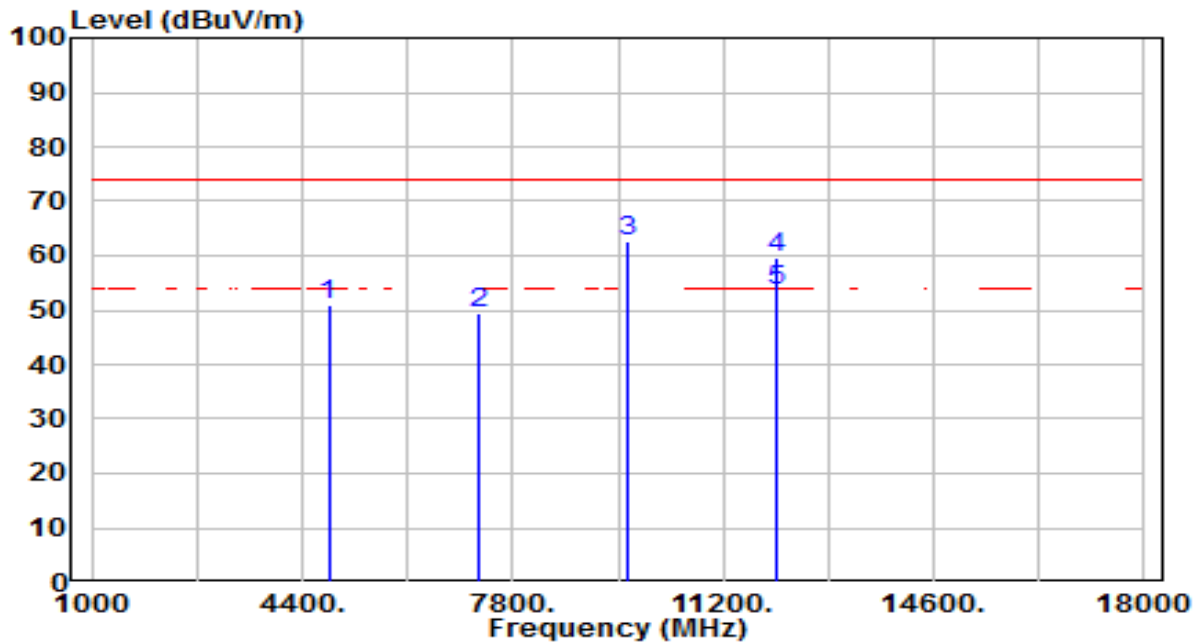


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	50.85	0.25	51.10	-22.90	74.00	100	245	Peak
2	7236.000	43.72	5.81	49.53	-24.47	74.00	100	305	Peak
3	9648.000	57.29	5.32	62.61	-11.39	74.00	100	80	Peak
4	* 12060.000	53.82	5.99	59.81	-14.19	74.00	100	325	Peak
5	* 12060.000	47.55	5.99	53.54	-0.46	54.00	100	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

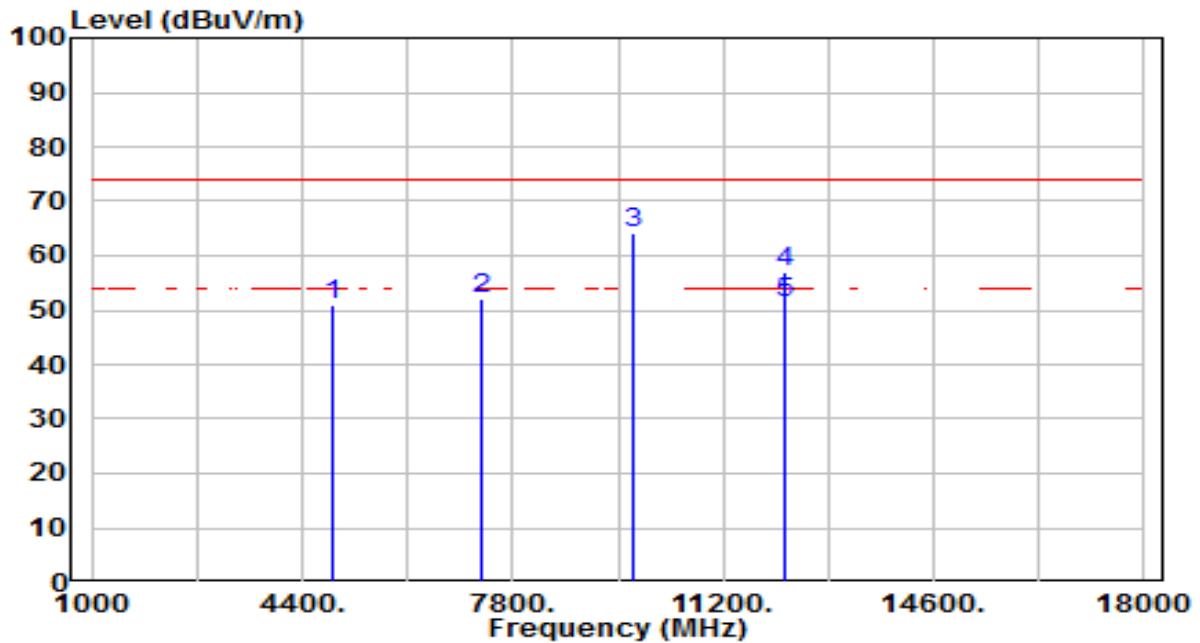


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.69	0.35	51.04	-22.96	74.00	200	240	Peak
2	7311.000	46.40	5.79	52.20	-21.80	74.00	200	255	Peak
3	9748.000	58.66	5.34	64.00	-10.00	74.00	200	105	Peak
4	* 12185.000	51.03	6.08	57.11	-16.89	74.00	100	0	Peak
5	* 12185.000	45.20	6.08	51.28	-2.72	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

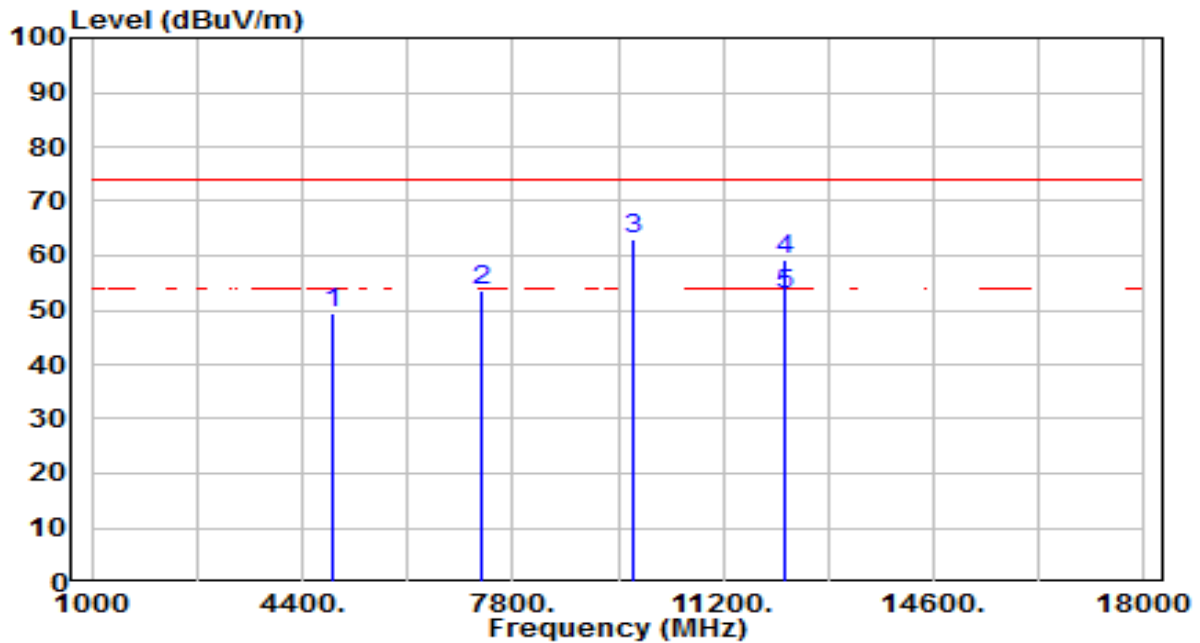


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	49.12	0.35	49.47	-24.53	74.00	100	255	Peak
2	7311.000	47.94	5.79	53.74	-20.26	74.00	100	235	Peak
3	9748.000	57.81	5.34	63.15	-10.85	74.00	100	80	Peak
4	* 12185.000	53.04	6.08	59.12	-14.88	74.00	100	235	Peak
5	* 12185.000	46.58	6.08	52.66	-1.34	54.00	100	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

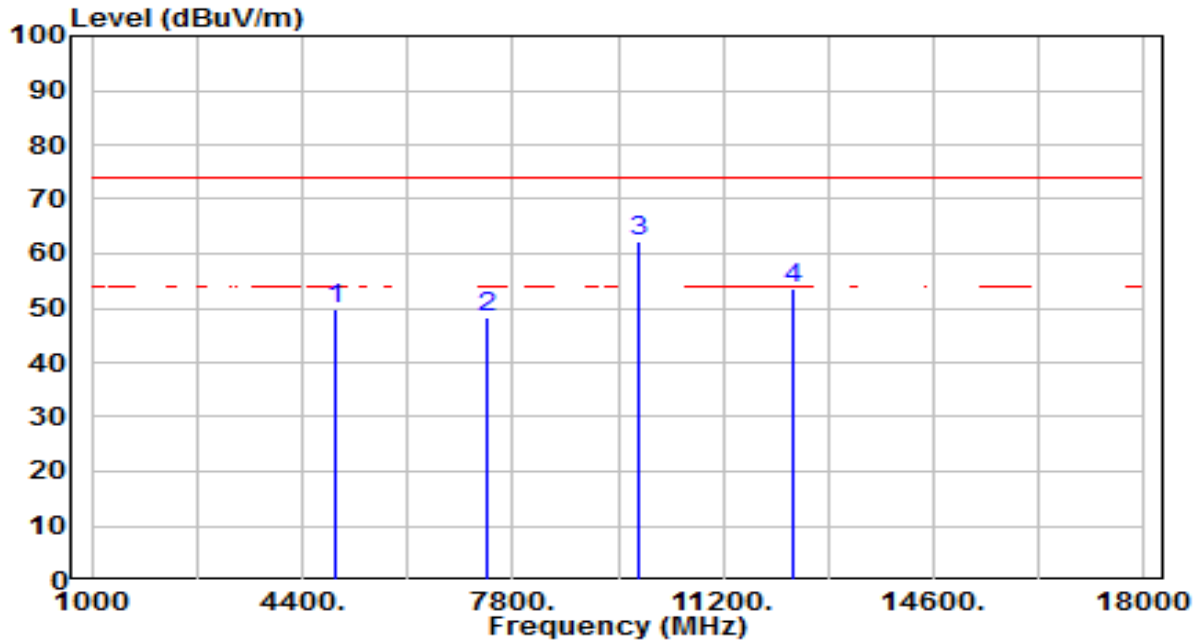


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	49.22	0.45	49.68	-24.32	74.00	200	240	Peak
2	7386.000	42.43	5.77	48.20	-25.80	74.00	200	155	Peak
3	* 9848.000	56.95	5.38	62.33	-11.67	74.00	200	90	Peak
4	12310.000	47.34	6.23	53.57	-20.43	74.00	200	260	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

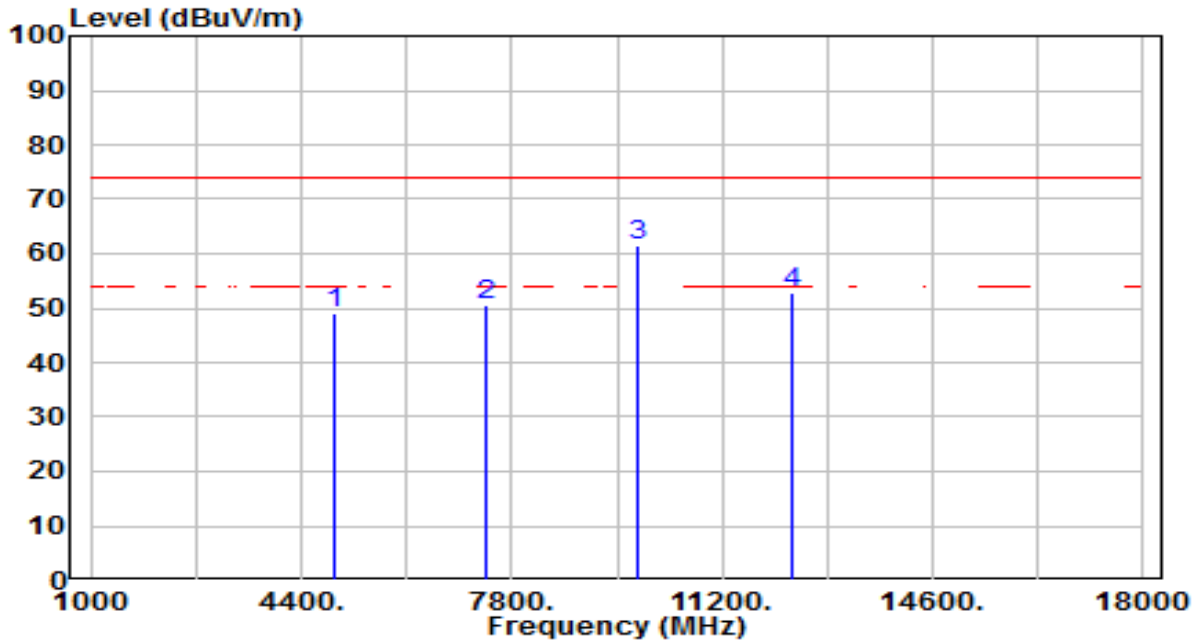


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	48.55	0.45	49.00	-25.00	74.00	100	260	Peak
2	7386.000	44.91	5.77	50.68	-23.32	74.00	100	240	Peak
3	* 9848.000	56.22	5.38	61.60	-12.40	74.00	100	70	Peak
4	12310.000	46.52	6.23	52.75	-21.25	74.00	100	225	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

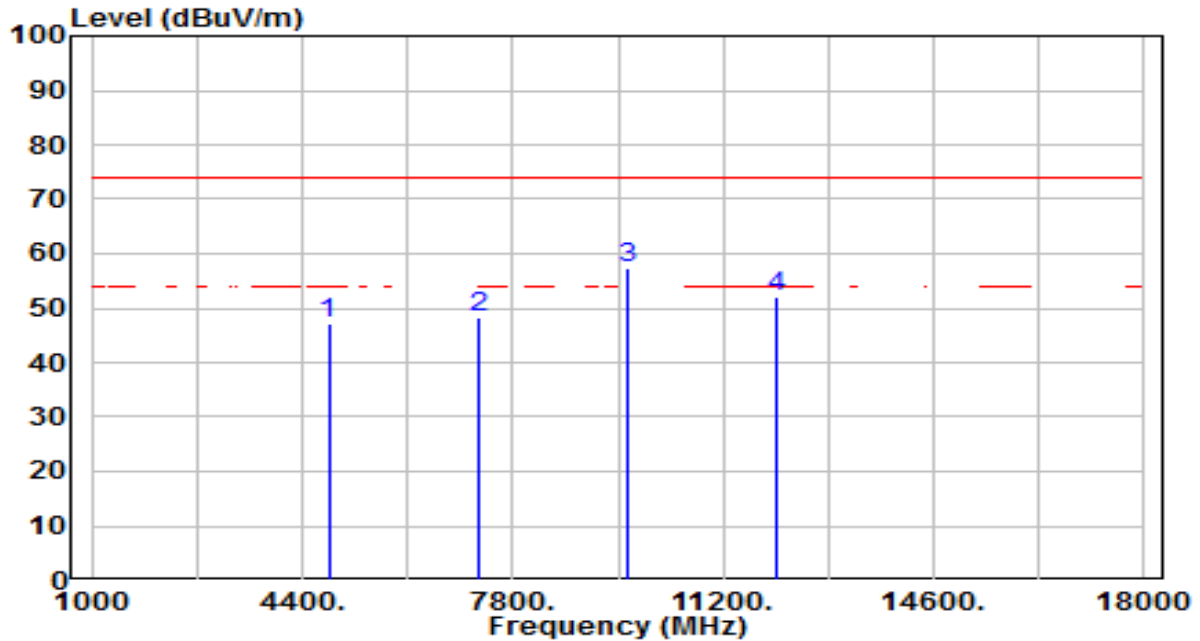


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	47.02	0.25	47.27	-26.73	74.00	200	240	Peak
2	7236.000	42.31	5.81	48.13	-25.87	74.00	200	275	Peak
3	* 9648.000	52.14	5.32	57.46	-16.54	74.00	200	110	Peak
4	12060.000	46.03	5.99	52.02	-21.98	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

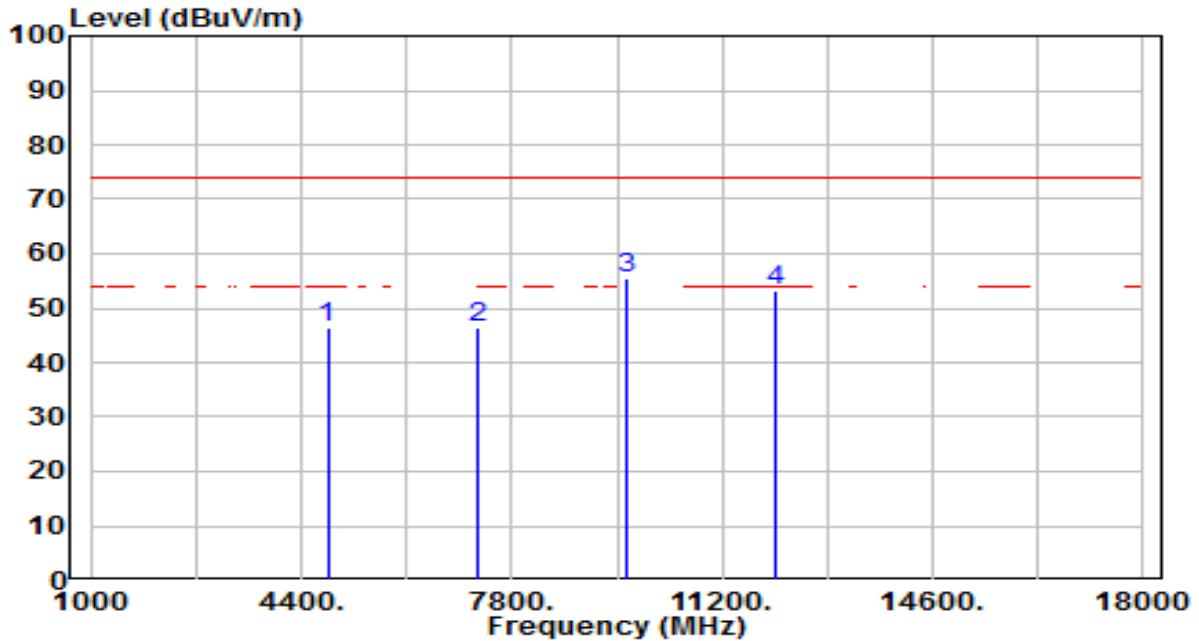


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	46.06	0.25	46.31	-27.69	74.00	100	320	Peak
2	7236.000	40.43	5.81	46.25	-27.75	74.00	100	120	Peak
3	* 9648.000	50.09	5.32	55.41	-18.59	74.00	100	75	Peak
4	12060.000	47.35	5.99	53.33	-20.67	74.00	100	310	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

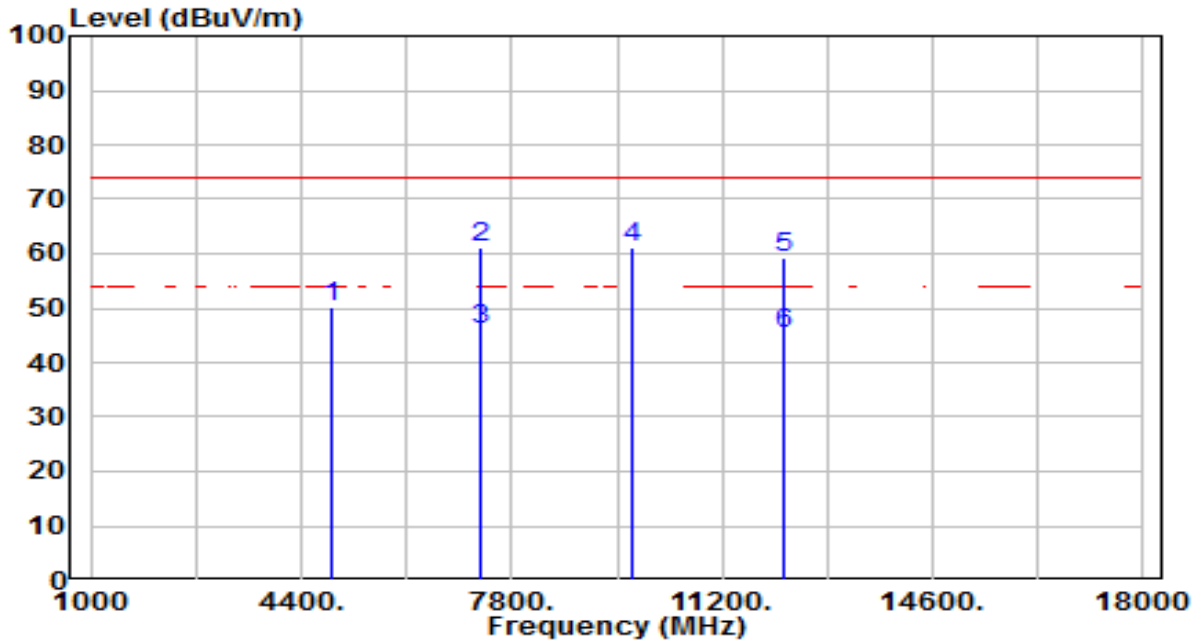


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	49.93	0.35	50.28	-23.72	74.00	200	155	Peak
2	* 7311.000	55.24	5.79	61.03	-12.97	74.00	235	250	Peak
3	* 7311.000	40.12	5.79	45.91	-8.09	54.00	235	250	Average
4	9748.000	55.71	5.34	61.05	-12.95	74.00	200	120	Peak
5	12185.000	53.19	6.08	59.27	-14.73	74.00	100	5	Peak
6	12185.000	39.29	6.08	45.37	-8.63	54.00	100	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

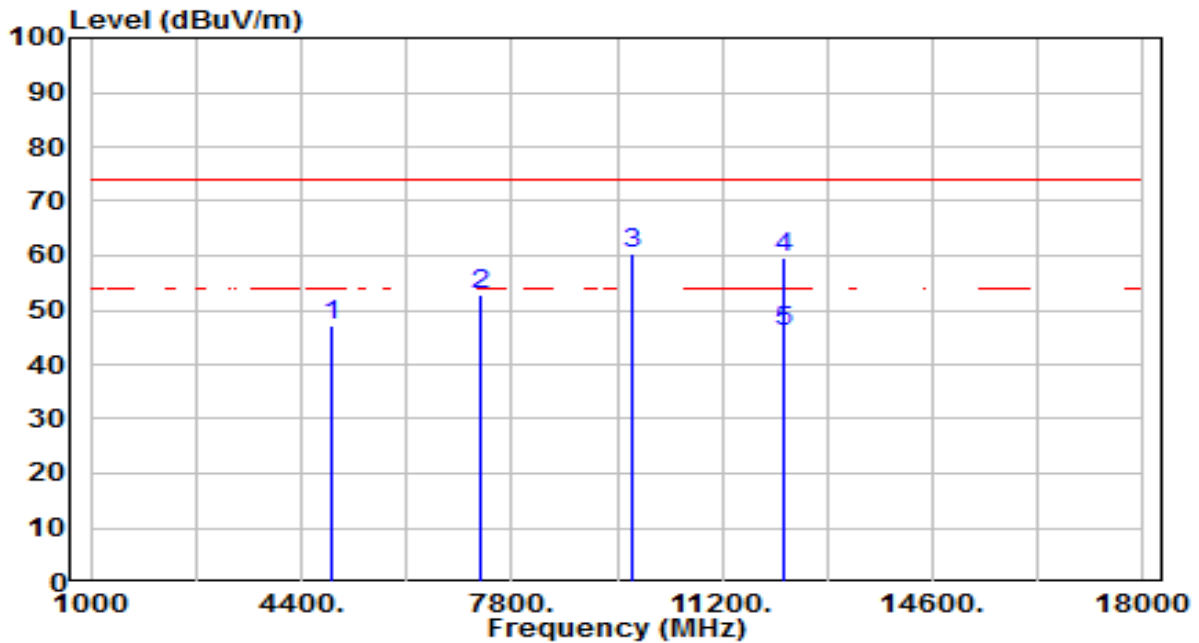


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	46.74	0.35	47.09	-26.91	74.00	100	260	Peak
2	7311.000	47.01	5.79	52.80	-21.20	74.00	100	250	Peak
3	9748.000	54.87	5.34	60.21	-13.79	74.00	100	80	Peak
4	* 12185.000	53.62	6.08	59.70	-14.30	74.00	100	315	Peak
5	* 12185.000	40.03	6.08	46.11	-7.89	54.00	100	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

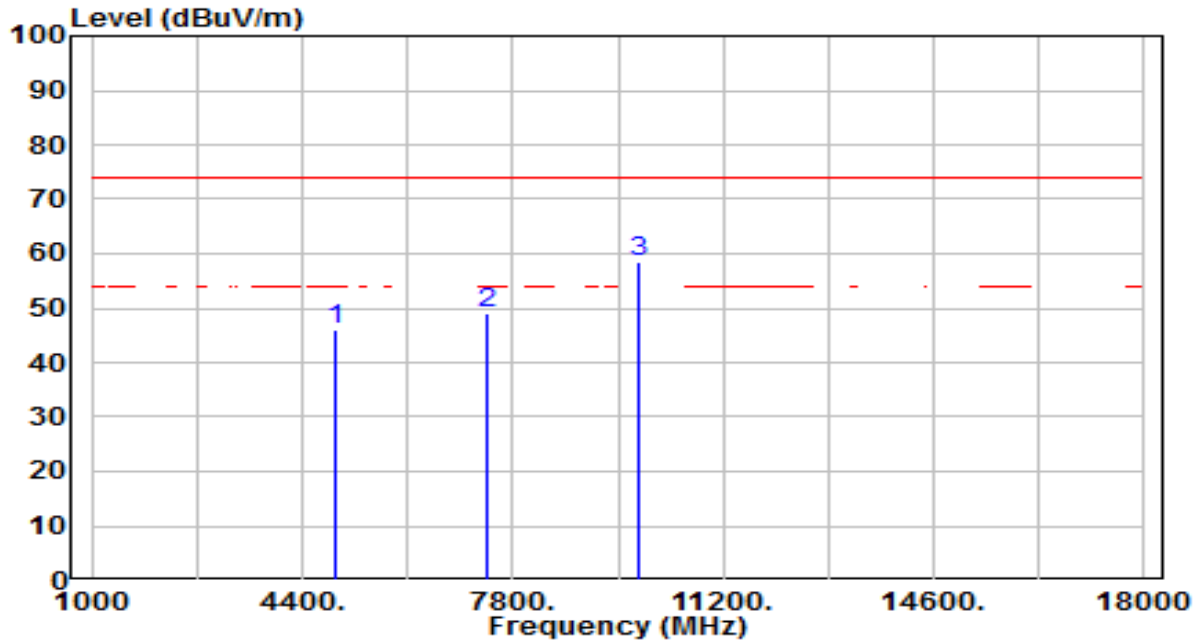


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.73	0.45	46.19	-27.81	74.00	200	160	Peak
2	7386.000	43.35	5.77	49.13	-24.87	74.00	200	245	Peak
3	* 9848.000	52.97	5.38	58.35	-15.65	74.00	200	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

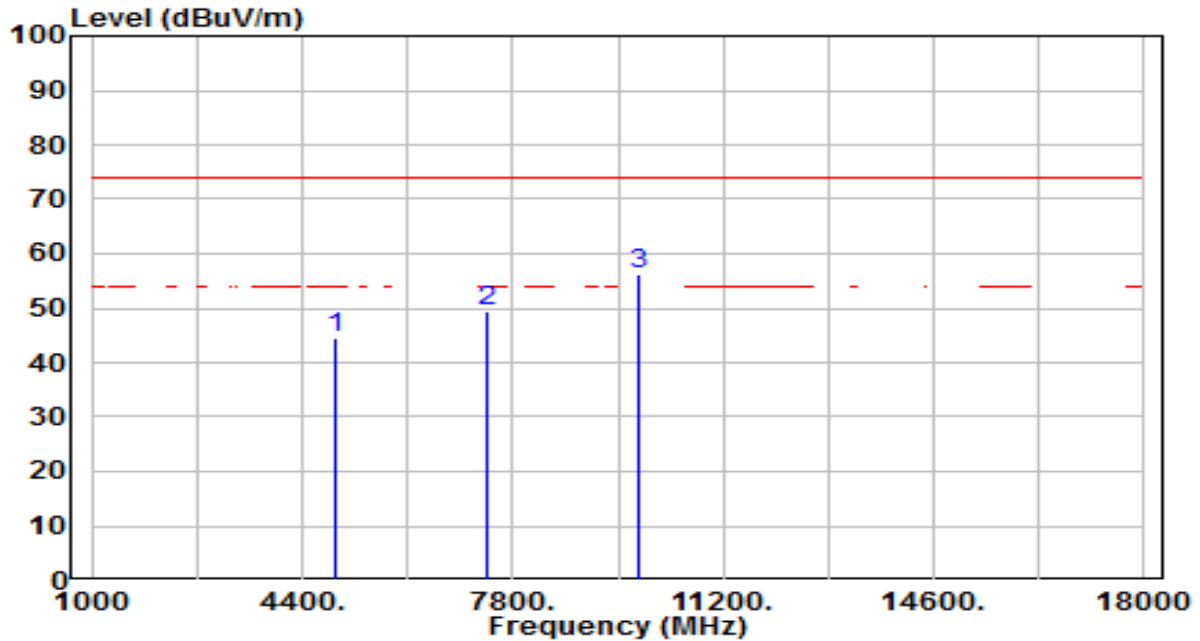


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	44.12	0.45	44.57	-29.43	74.00	100	280	Peak
2	7386.000	43.56	5.77	49.33	-24.67	74.00	100	140	Peak
3	* 9848.000	50.82	5.38	56.20	-17.80	74.00	100	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

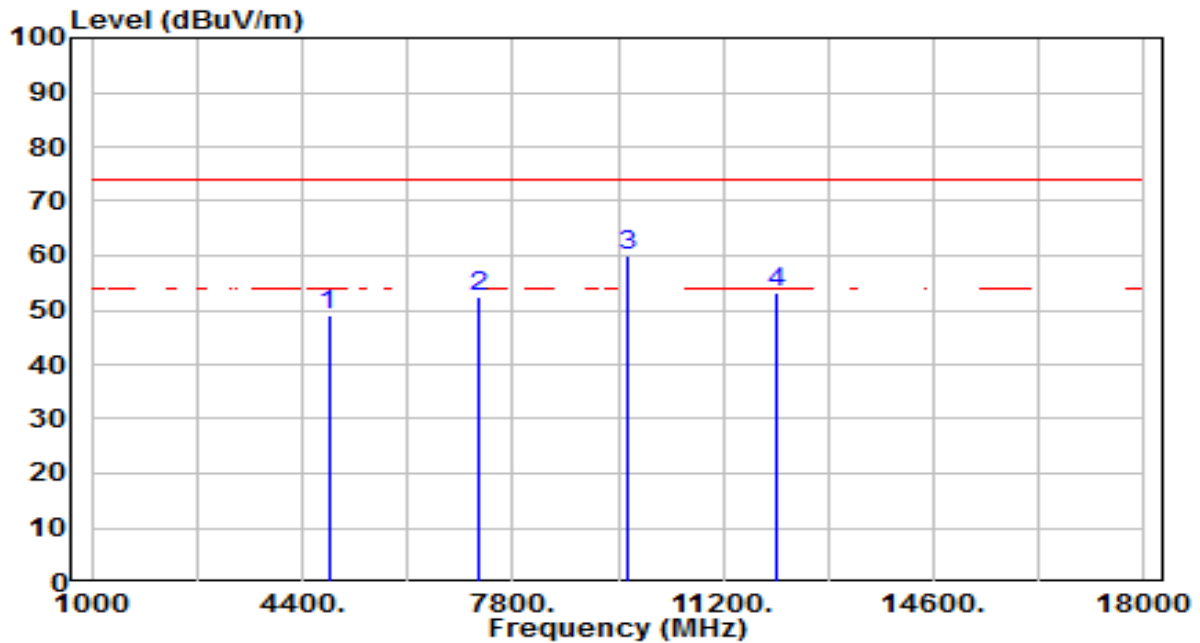


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	48.76	0.25	49.01	-24.99	74.00	200	235	Peak
2	7236.000	46.53	5.81	52.34	-21.66	74.00	200	280	Peak
3	* 9648.000	54.57	5.32	59.89	-14.11	74.00	200	110	Peak
4	12060.000	47.19	5.99	53.18	-20.82	74.00	200	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

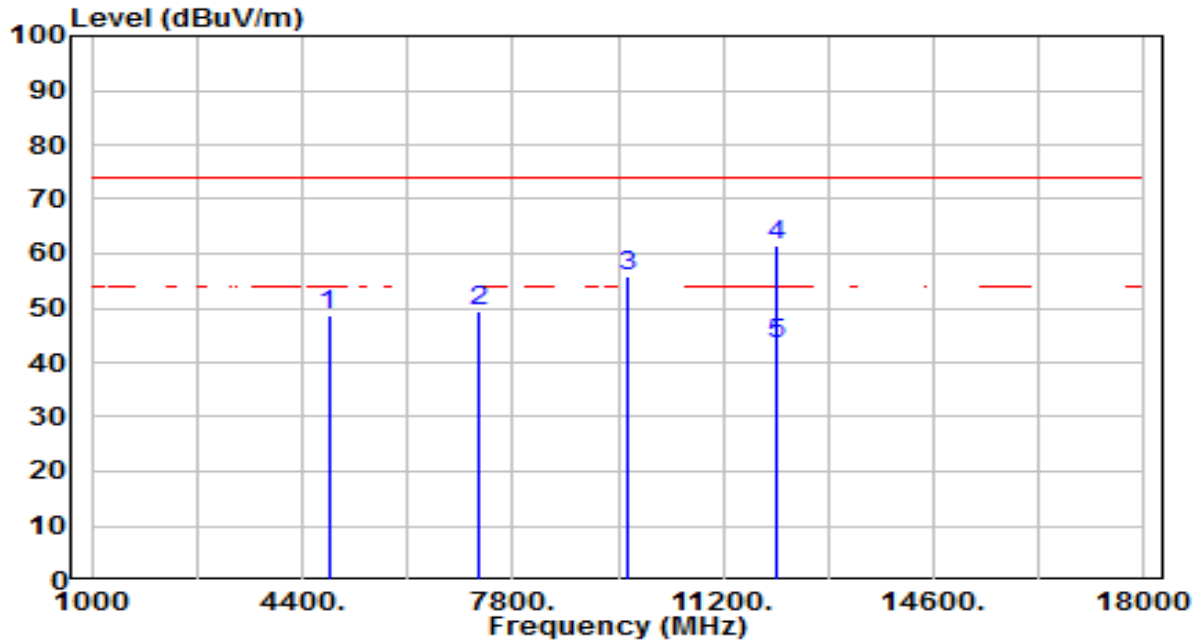


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	48.56	0.25	48.81	-25.19	74.00	100	260	Peak
2	7236.000	43.72	5.81	49.53	-24.47	74.00	100	170	Peak
3	9648.000	50.51	5.32	55.84	-18.16	74.00	100	75	Peak
4	* 12060.000	55.42	5.99	61.41	-12.59	74.00	100	315	Peak
5	* 12060.000	37.23	5.99	43.22	-10.78	54.00	100	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

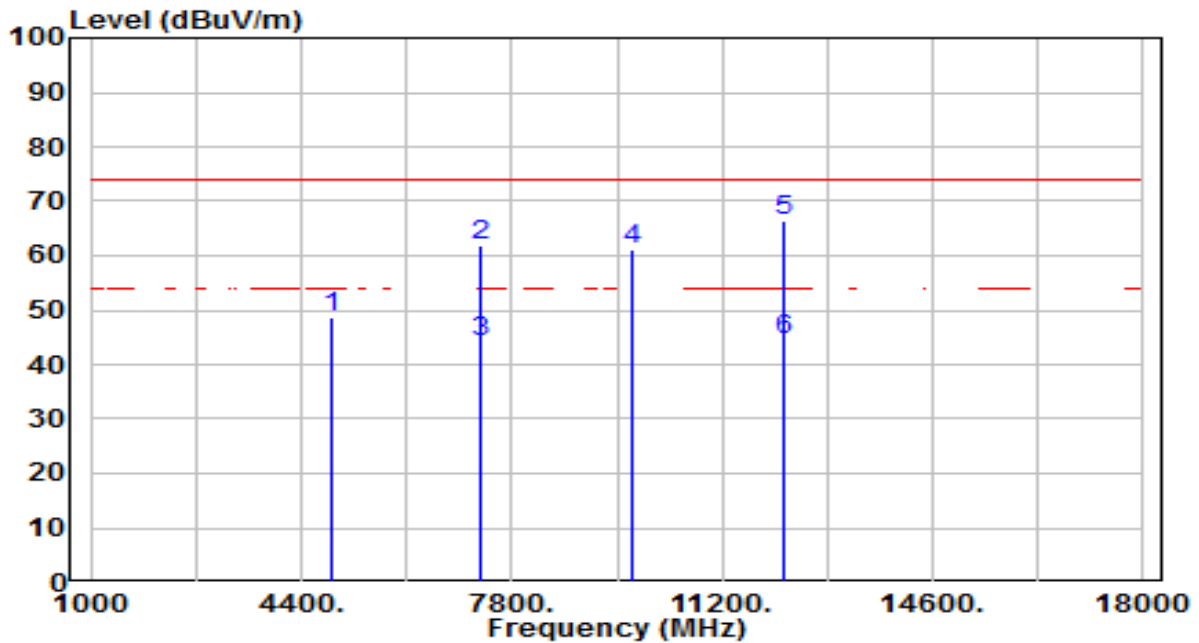


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	48.36	0.35	48.72	-25.28	74.00	200	195	Peak
2	7311.000	56.03	5.79	61.82	-12.18	74.00	235	255	Peak
3	7311.000	38.22	5.79	44.01	-9.99	54.00	235	255	Average
4	9748.000	55.68	5.34	61.02	-12.98	74.00	200	80	Peak
5 *	12185.000	60.29	6.08	66.37	-7.63	74.00	100	5	Peak
6 *	12185.000	38.52	6.08	44.60	-9.40	54.00	100	5	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

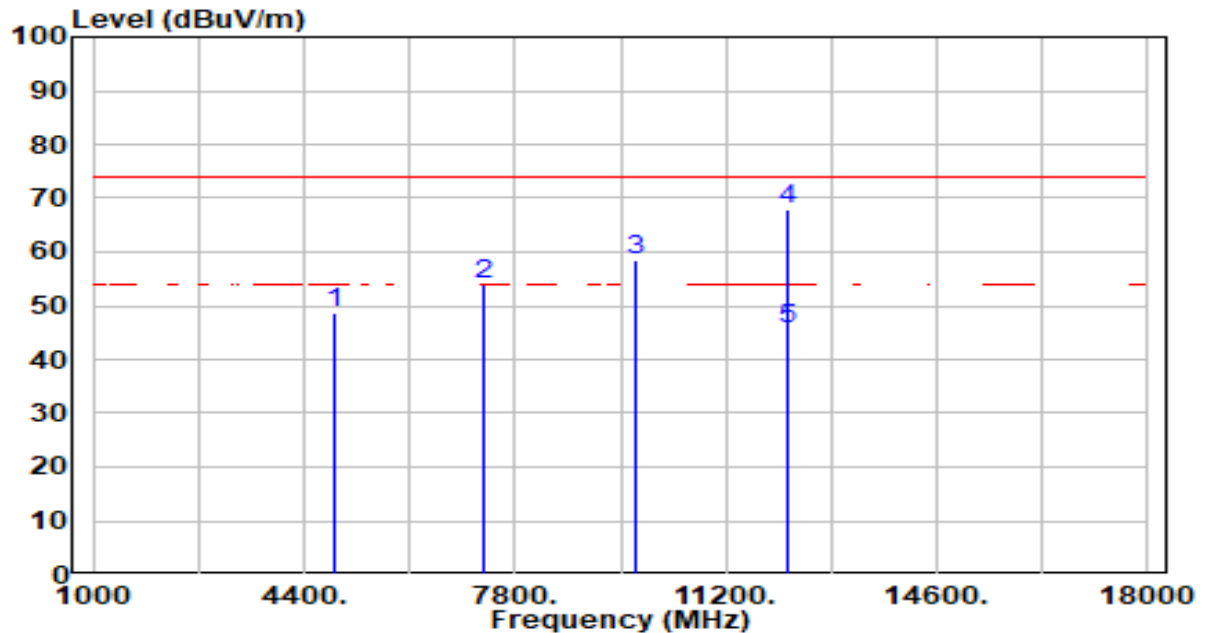


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	48.31	0.35	48.66	-25.34	74.00	100	255	Peak
2	7311.000	48.13	5.79	53.93	-20.07	74.00	100	250	Peak
3	9748.000	53.31	5.34	58.65	-15.35	74.00	100	75	Peak
4	* 12185.000	61.82	6.08	67.90	-6.10	74.00	100	315	Peak
5	* 12185.000	39.59	6.08	45.67	-8.33	54.00	100	315	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

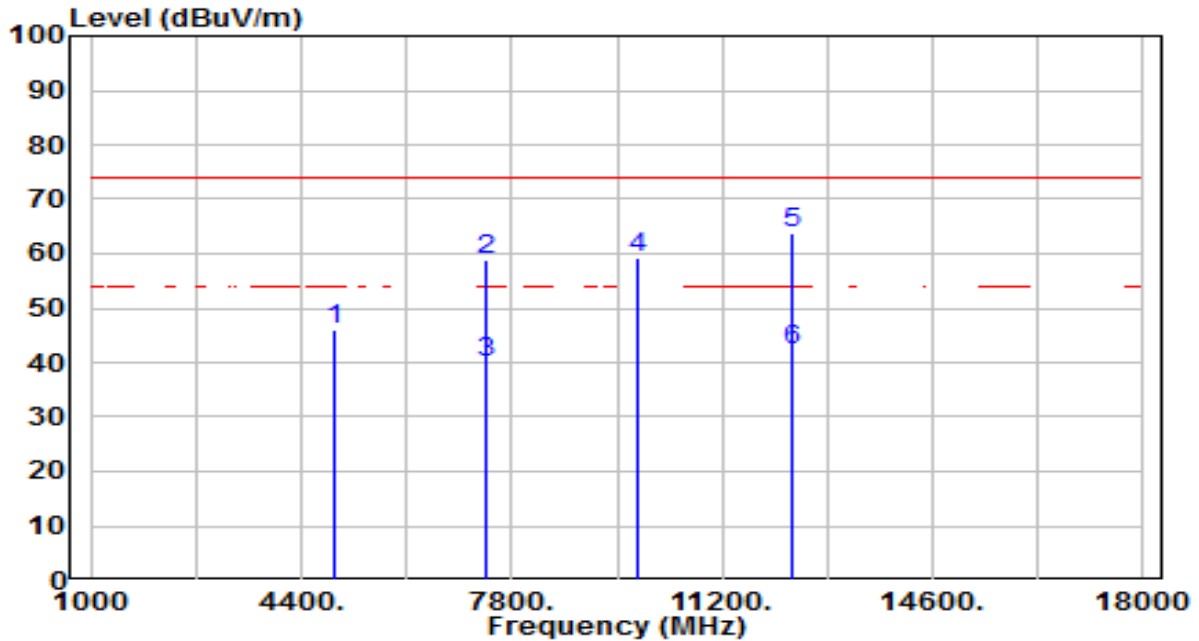


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.51	0.45	45.96	-28.04	74.00	200	240	Peak
2	7386.000	53.22	5.77	58.99	-15.01	74.00	230	255	Peak
3	7386.000	34.11	5.77	39.88	-14.12	54.00	230	255	Average
4	9848.000	54.05	5.38	59.43	-14.57	74.00	200	110	Peak
5 *	12310.000	57.40	6.23	63.63	-10.37	74.00	105	255	Peak
6 *	12310.000	35.93	6.23	42.16	-11.84	54.00	105	255	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

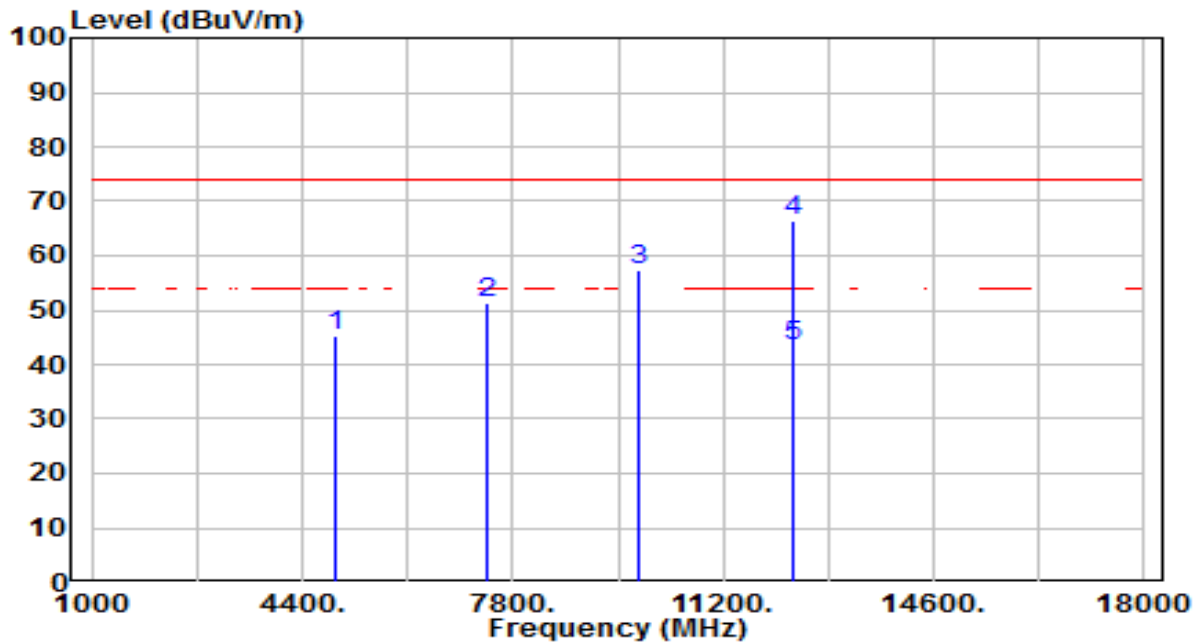


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	44.90	0.45	45.35	-28.65	74.00	100	240	Peak
2	7386.000	45.62	5.77	51.39	-22.61	74.00	100	230	Peak
3	9848.000	51.95	5.38	57.33	-16.67	74.00	100	70	Peak
4	* 12310.000	60.12	6.23	66.35	-7.65	74.00	105	230	Peak
5	* 12310.000	37.11	6.23	43.34	-10.66	54.00	105	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

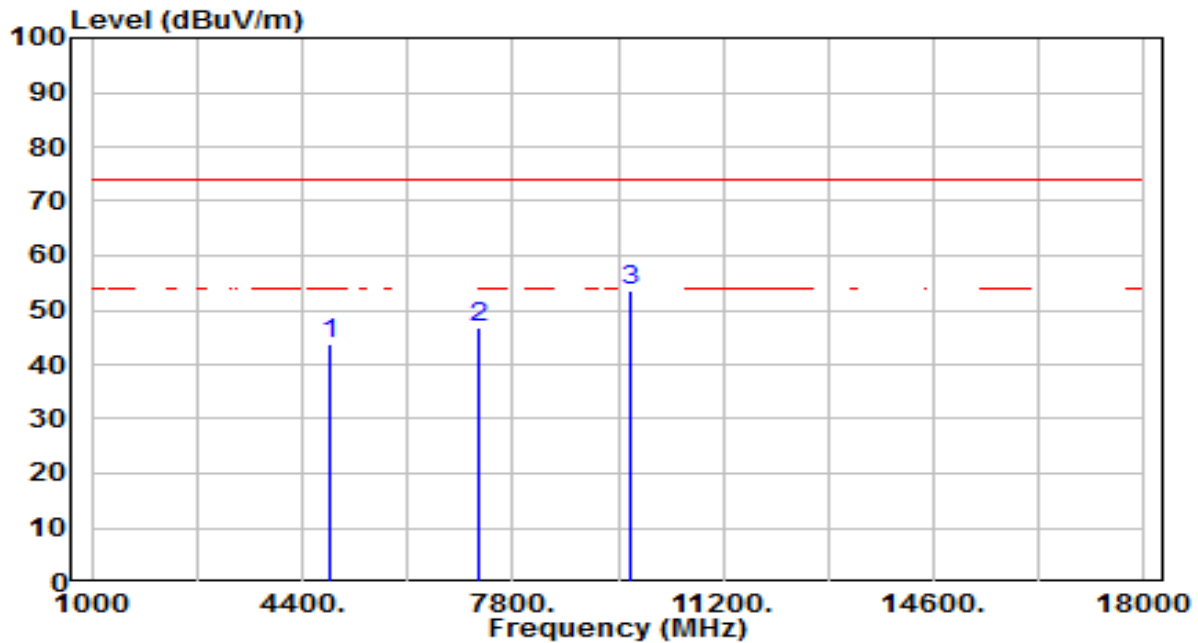


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	43.58	0.29	43.87	-30.13	74.00	200	335	Peak
2	7266.000	40.88	5.81	46.68	-27.32	74.00	200	250	Peak
3	* 9688.000	48.24	5.33	53.57	-20.43	74.00	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

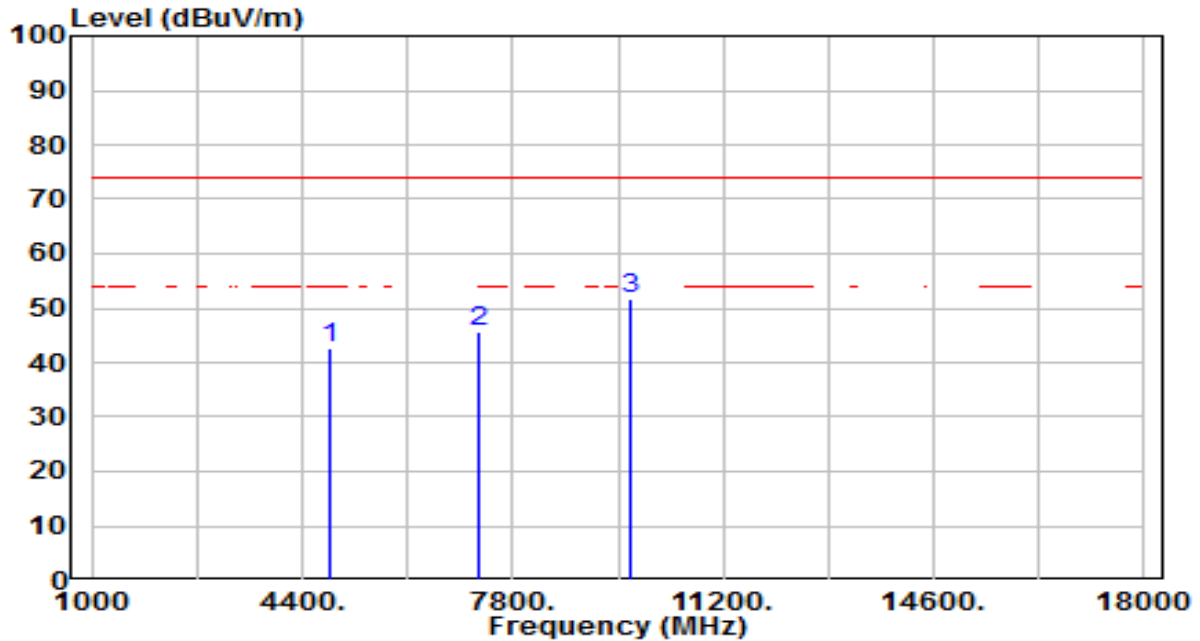


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	42.51	0.29	42.80	-31.20	74.00	100	290	Peak
2	7266.000	39.89	5.81	45.69	-28.31	74.00	100	245	Peak
3	* 9688.000	46.19	5.33	51.52	-22.48	74.00	100	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

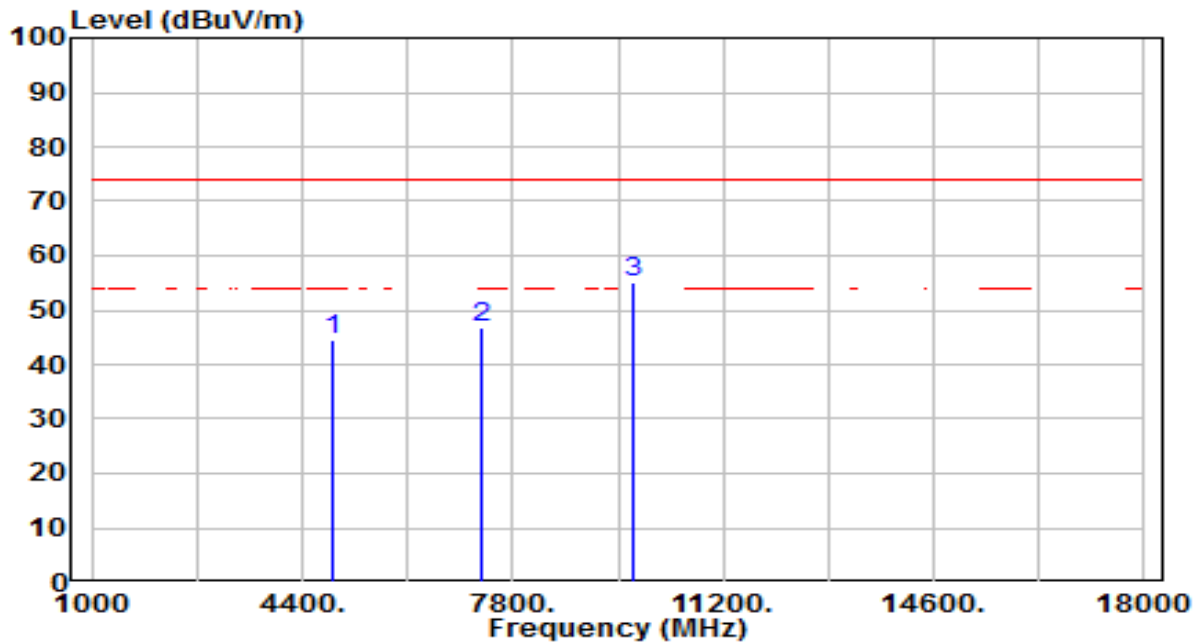


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	44.12	0.35	44.47	-29.53	74.00	200	240	Peak
2	7311.000	40.93	5.79	46.72	-27.28	74.00	200	280	Peak
3	* 9748.000	49.87	5.34	55.21	-18.79	74.00	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

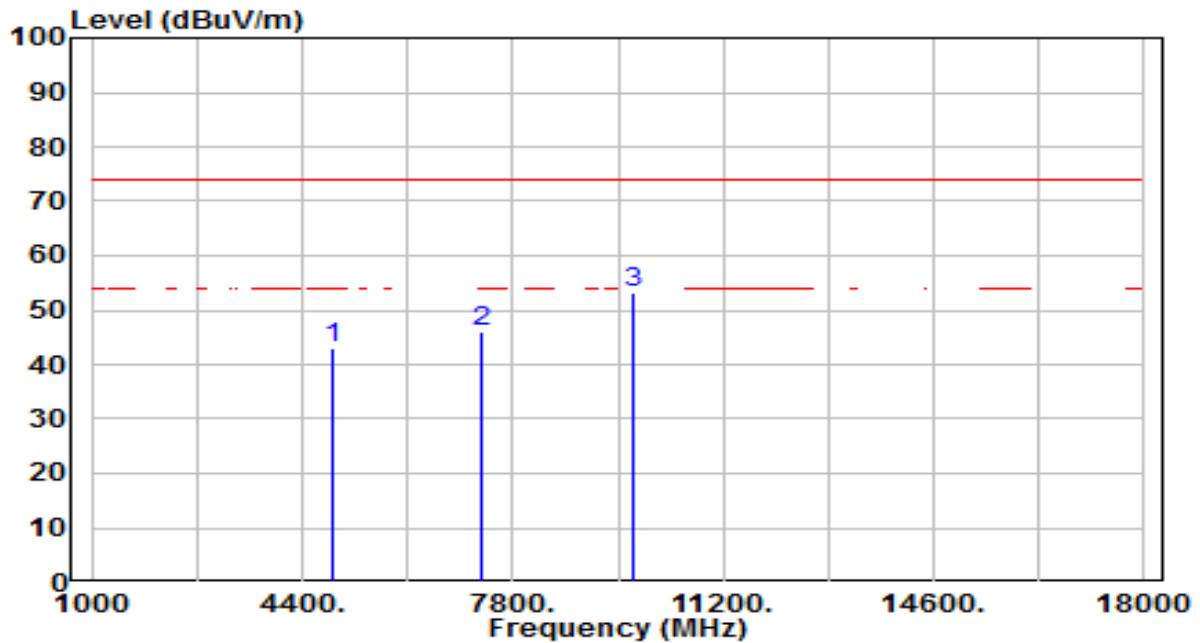


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.55	0.35	42.90	-31.10	74.00	100	70	Peak
2	7311.000	40.23	5.79	46.03	-27.97	74.00	100	65	Peak
3	* 9748.000	47.91	5.34	53.25	-20.75	74.00	100	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

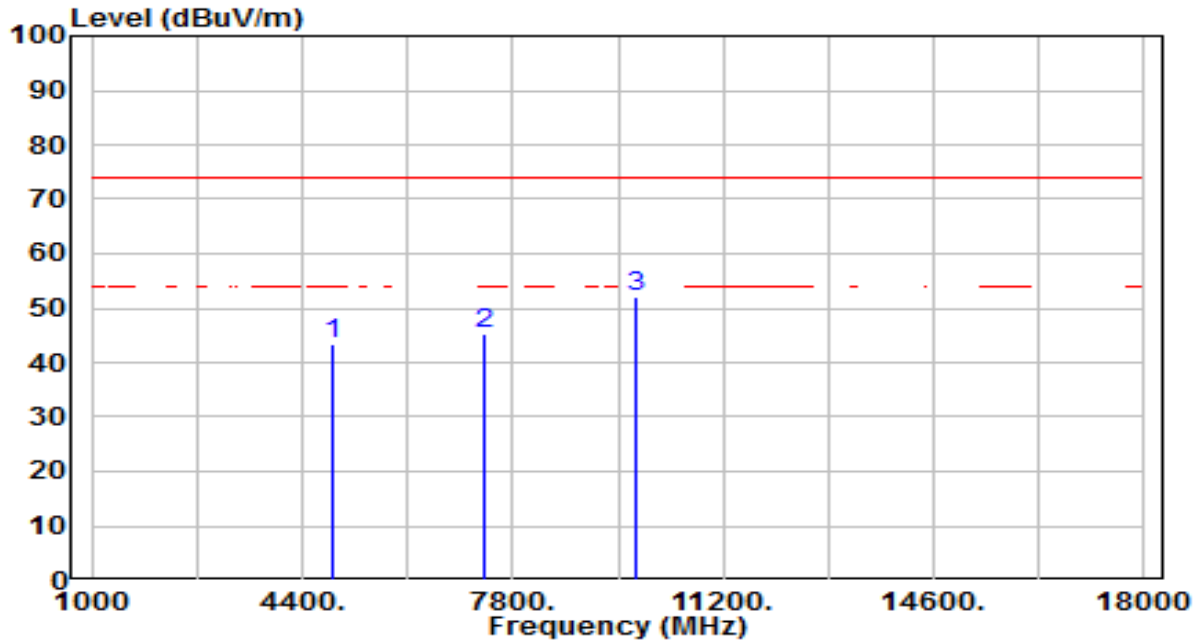


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	43.16	0.41	43.57	-30.43	74.00	200	275	Peak
2	7356.000	39.69	5.78	45.47	-28.53	74.00	200	25	Peak
3	* 9808.000	46.64	5.35	51.99	-22.01	74.00	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

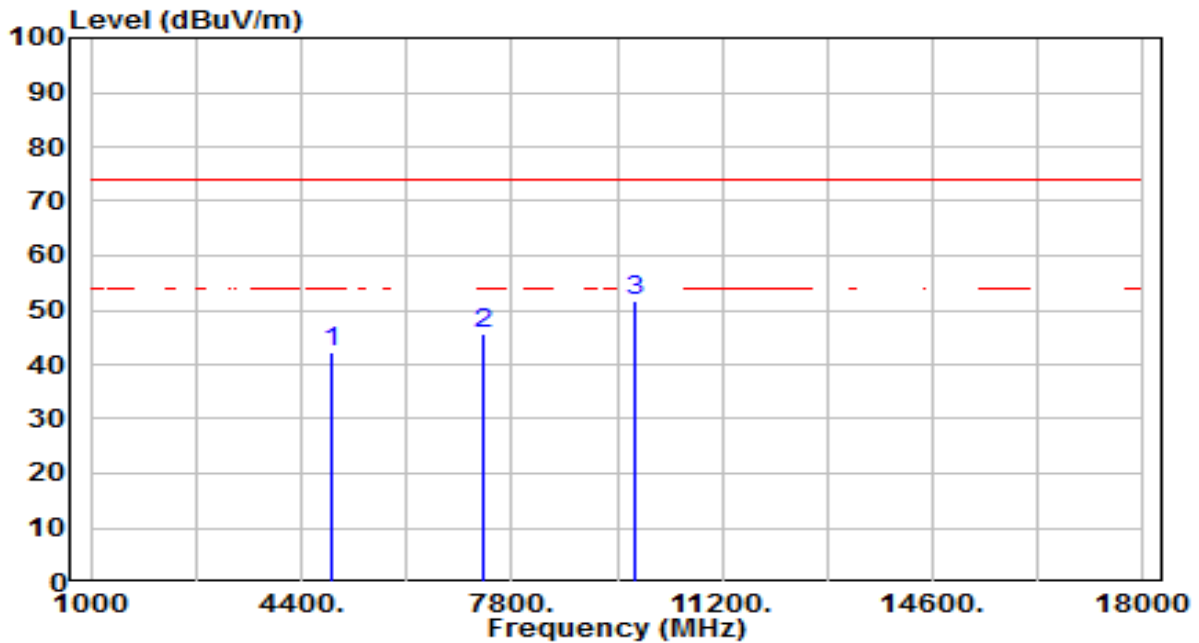


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	42.00	0.41	42.42	-31.58	74.00	100	325	Peak
2	7356.000	39.89	5.78	45.67	-28.33	74.00	100	160	Peak
3	* 9808.000	46.43	5.35	51.78	-22.22	74.00	100	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

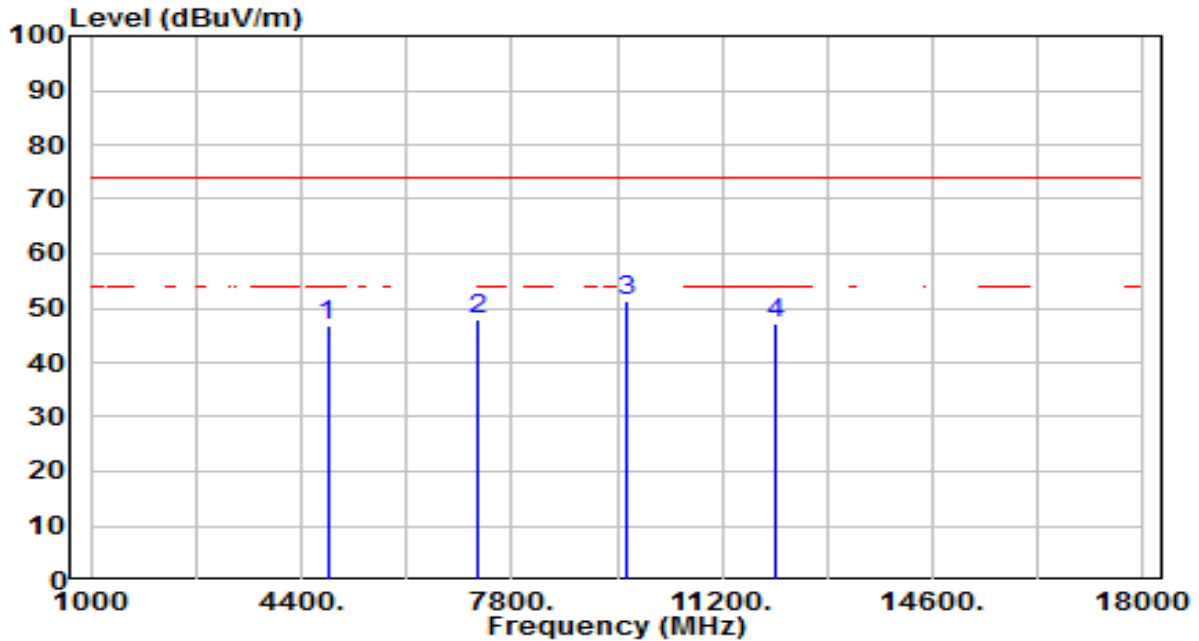


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	46.42	0.25	46.67	-27.33	74.00	200	45	Peak
2	7236.000	41.96	5.81	47.77	-26.23	74.00	200	185	Peak
3	* 9648.000	46.07	5.32	51.40	-22.60	74.00	200	80	Peak
4	12060.000	41.36	5.99	47.34	-26.66	74.00	200	140	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

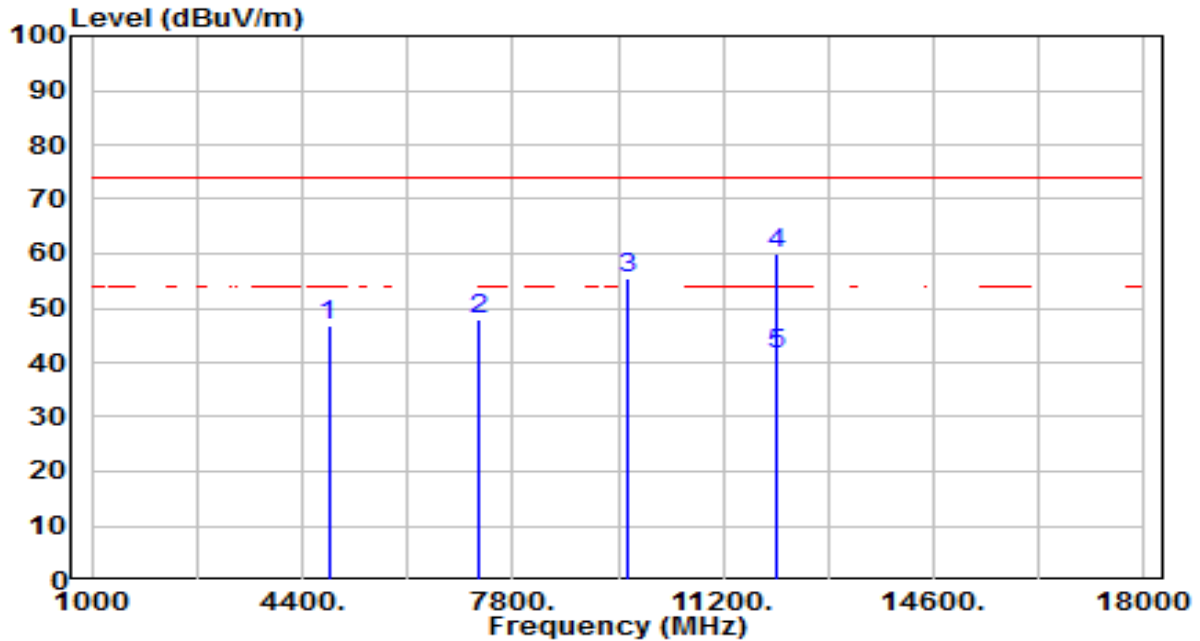


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	46.40	0.25	46.66	-27.34	74.00	100	340	Peak
2	7236.000	41.99	5.81	47.81	-26.19	74.00	100	265	Peak
3	9648.000	49.97	5.32	55.29	-18.71	74.00	100	80	Peak
4	* 12060.000	53.95	5.99	59.94	-14.06	74.00	100	315	Peak
5	* 12060.000	35.41	5.99	41.40	-12.60	54.00	100	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

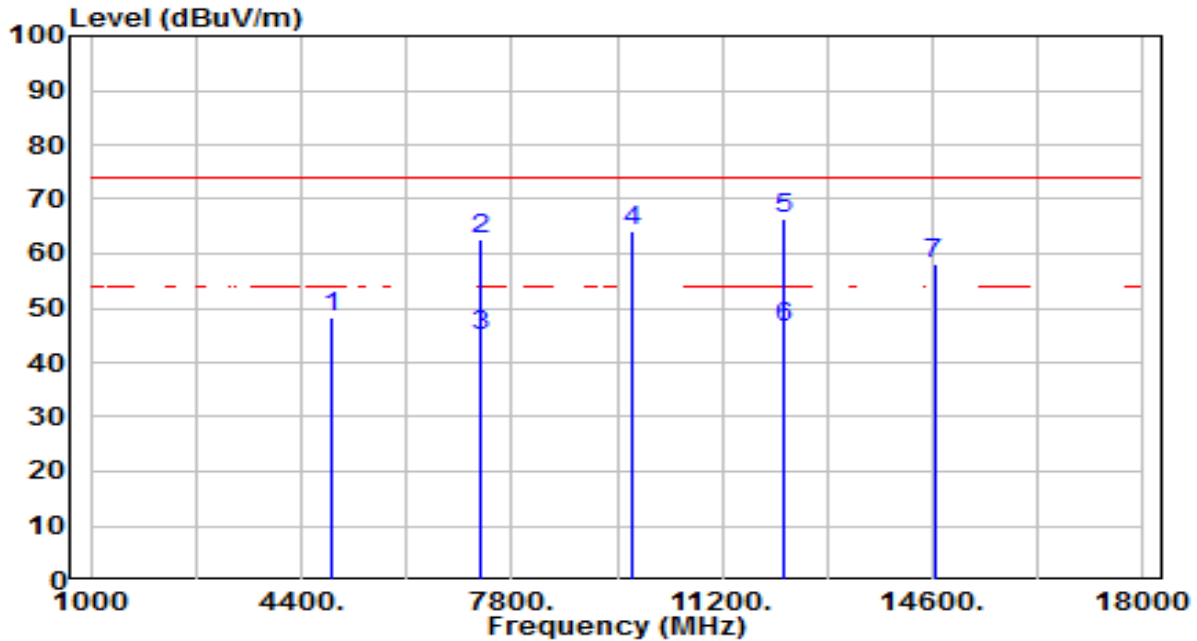


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	47.84	0.35	48.19	-25.81	74.00	200	220	Peak
2	7311.000	57.02	5.79	62.81	-11.19	74.00	235	250	Peak
3	7311.000	39.10	5.79	44.89	-9.11	54.00	235	250	Average
4	9748.000	58.74	5.34	64.08	-9.92	74.00	200	110	Peak
5 *	12185.000	60.28	6.08	66.36	-7.64	74.00	105	5	Peak
6 *	12185.000	40.24	6.08	46.32	-7.68	54.00	105	5	Average
7	14622.000	51.23	6.70	57.93	-16.07	74.00	200	198	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

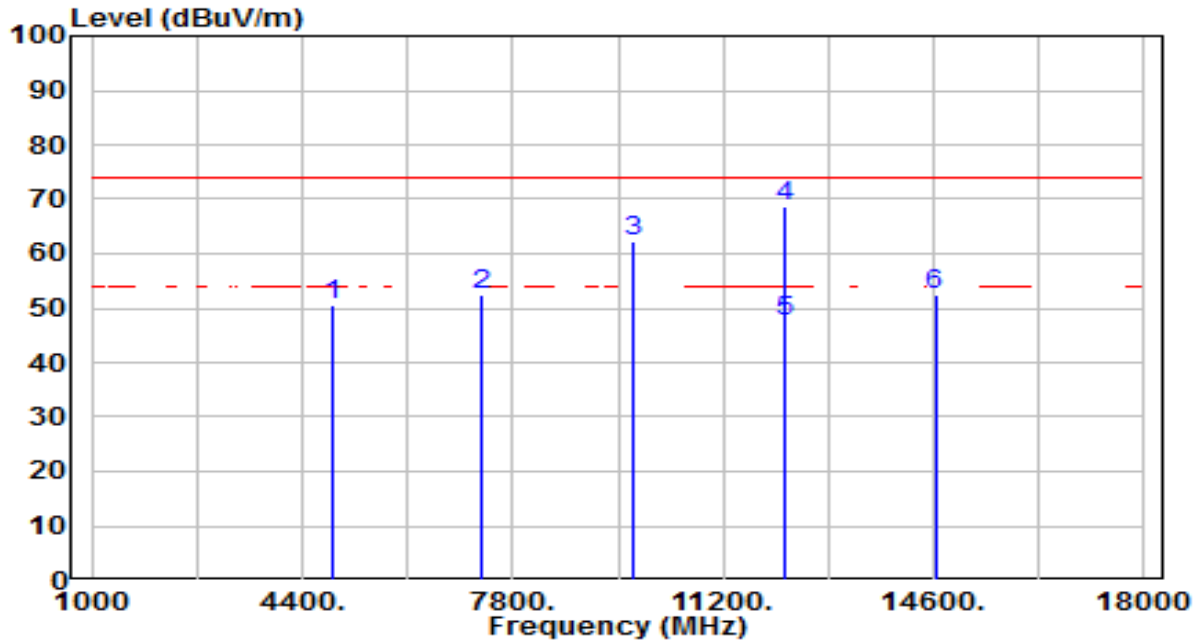


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.13	0.35	50.48	-23.52	74.00	100	250	Peak
2	7311.000	46.58	5.79	52.37	-21.63	74.00	100	240	Peak
3	9748.000	57.10	5.34	62.44	-11.56	74.00	100	80	Peak
4	* 12185.000	62.64	6.08	68.72	-5.28	74.00	100	315	Peak
5	* 12185.000	41.50	6.08	47.58	-6.42	54.00	100	315	Average
6	14622.000	45.73	6.70	52.44	-21.56	74.00	100	360	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

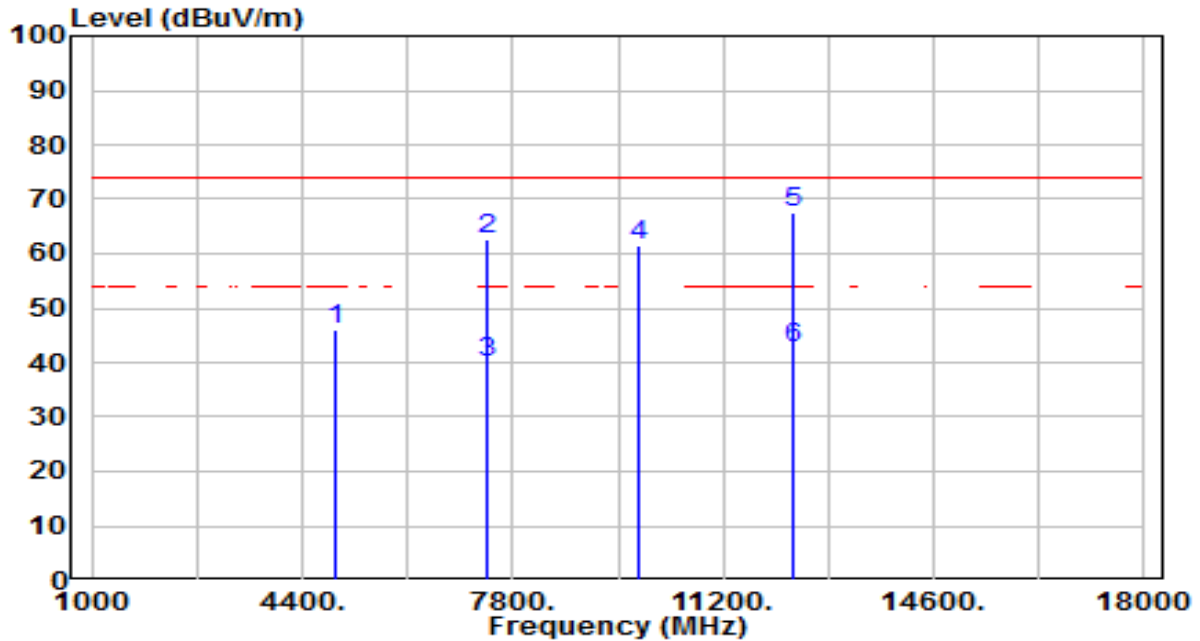


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.43	0.45	45.88	-28.12	74.00	200	275	Peak
2	7386.000	56.83	5.77	62.60	-11.40	74.00	235	250	Peak
3	7386.000	34.24	5.77	40.01	-13.99	54.00	235	250	Average
4	9848.000	55.99	5.38	61.37	-12.63	74.00	200	95	Peak
5 *	12310.000	61.20	6.23	67.43	-6.57	74.00	105	260	Peak
6 *	12310.000	36.35	6.23	42.58	-11.42	54.00	105	260	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

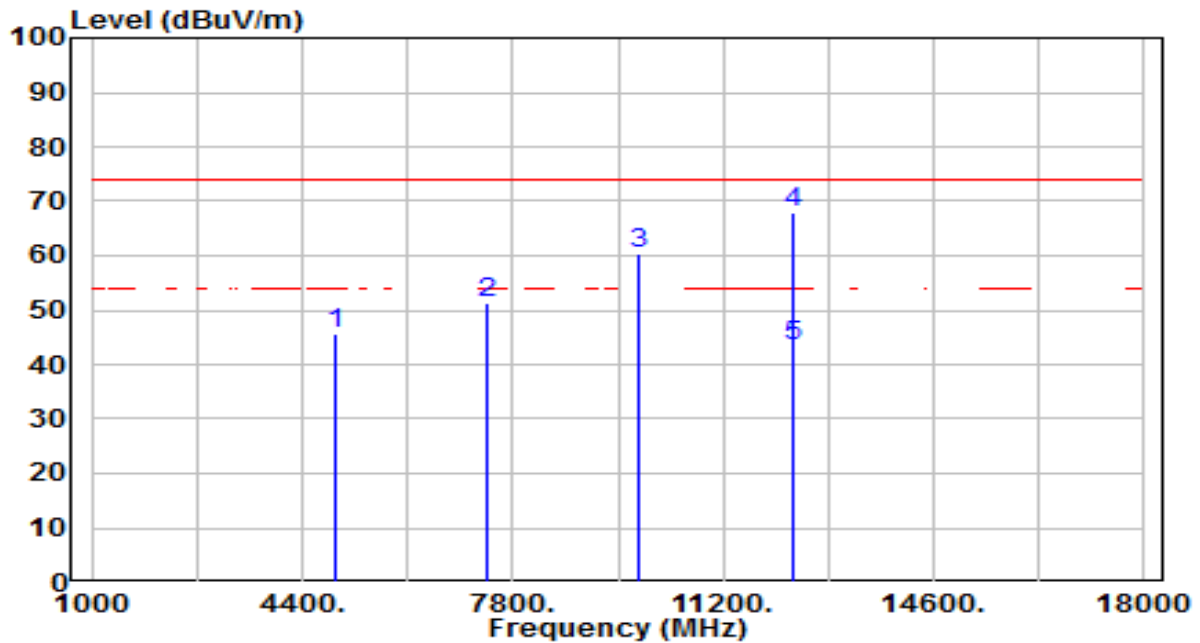


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.31	0.45	45.76	-28.24	74.00	100	250	Peak
2	7386.000	45.63	5.77	51.40	-22.60	74.00	100	250	Peak
3	9848.000	55.15	5.38	60.53	-13.47	74.00	100	20	Peak
4	* 12310.000	61.75	6.23	67.98	-6.02	74.00	110	235	Peak
5	* 12310.000	36.99	6.23	43.22	-10.78	54.00	110	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

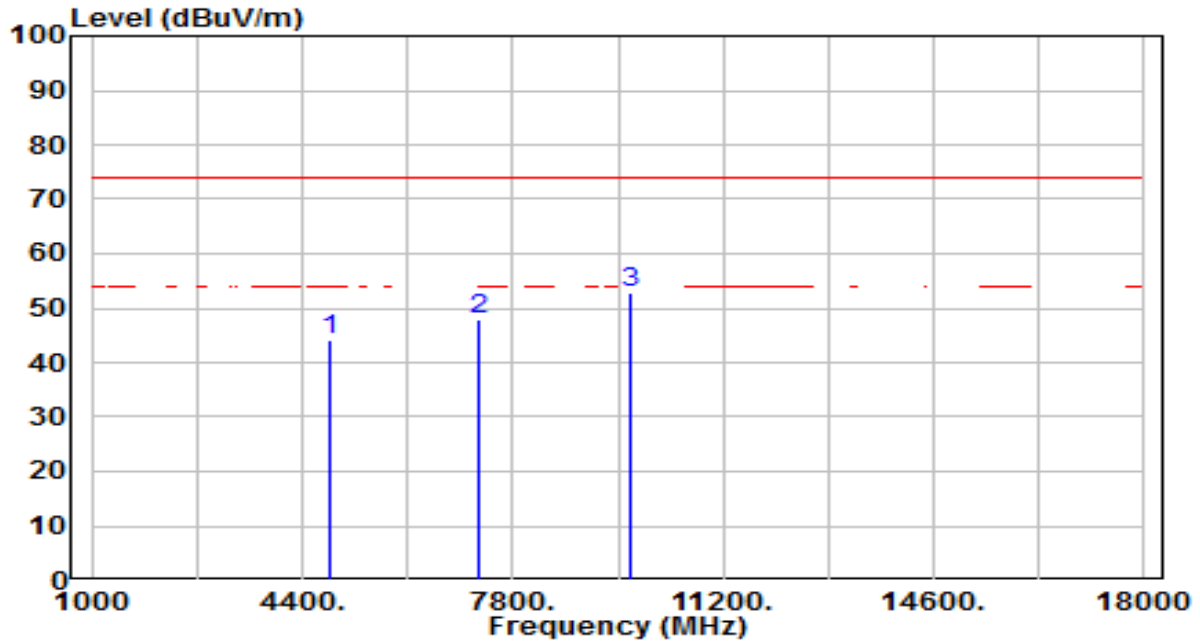


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	43.91	0.29	44.20	-29.80	74.00	200	235	Peak
2	7266.000	41.96	5.81	47.76	-26.24	74.00	200	250	Peak
3	* 9688.000	47.56	5.33	52.89	-21.11	74.00	200	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

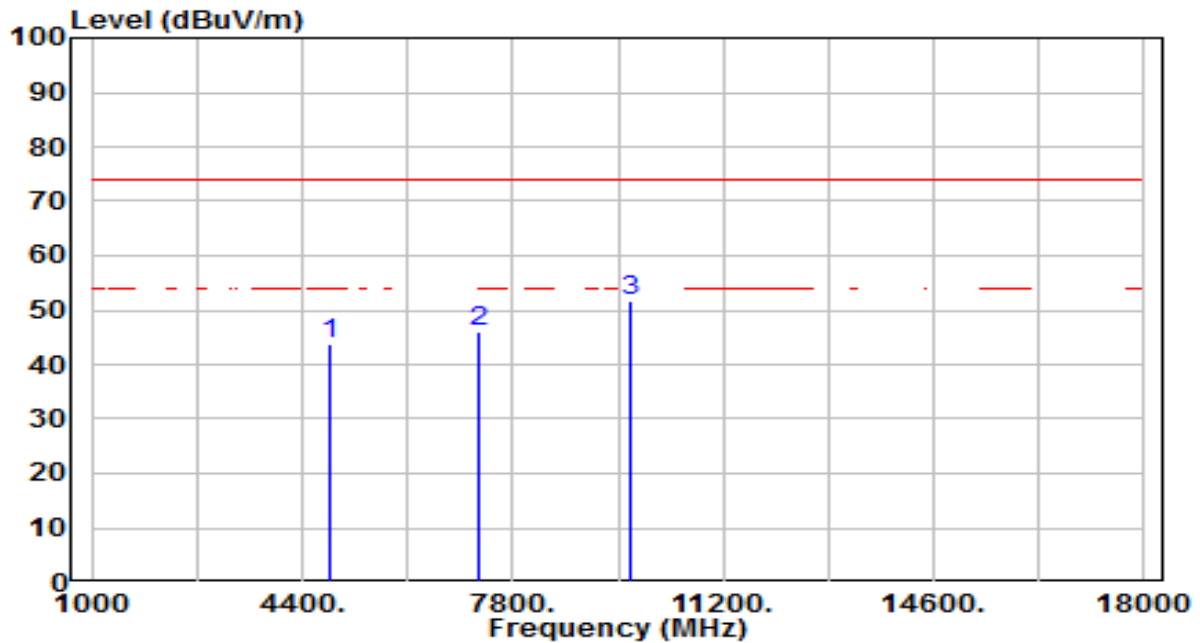


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	43.61	0.29	43.90	-30.10	74.00	100	75	Peak
2	7266.000	40.38	5.81	46.19	-27.81	74.00	100	70	Peak
3	* 9688.000	46.22	5.33	51.55	-22.45	74.00	100	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

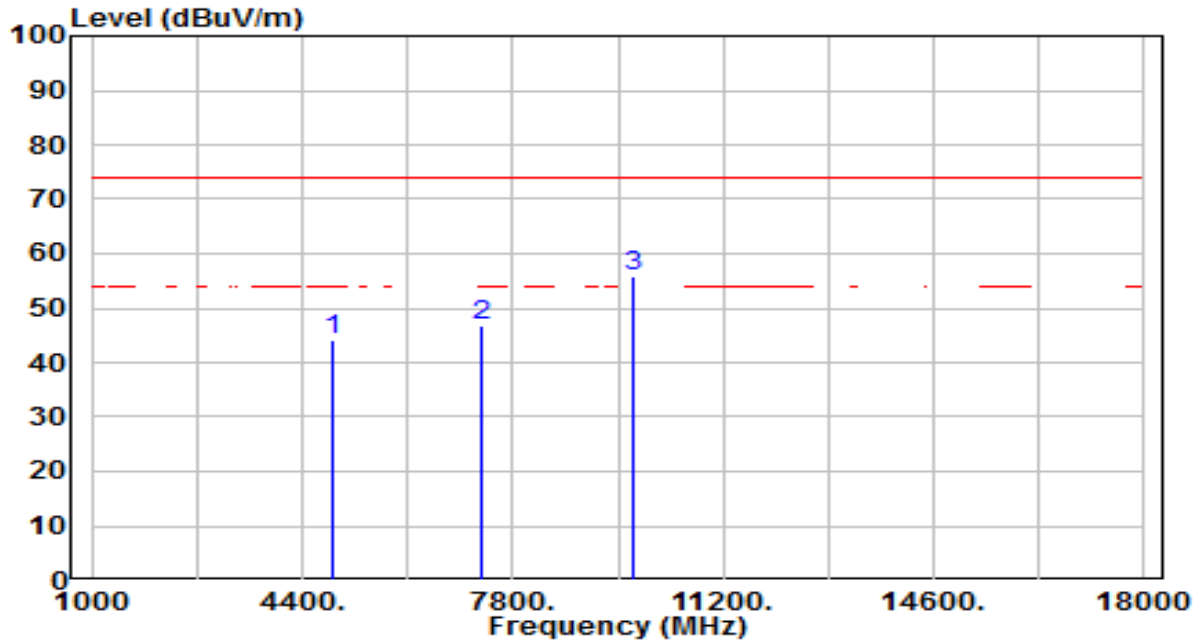


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.62	0.35	43.97	-30.03	74.00	200	265	Peak
2	7311.000	40.85	5.79	46.64	-27.36	74.00	200	160	Peak
3	* 9748.000	50.46	5.34	55.80	-18.20	74.00	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

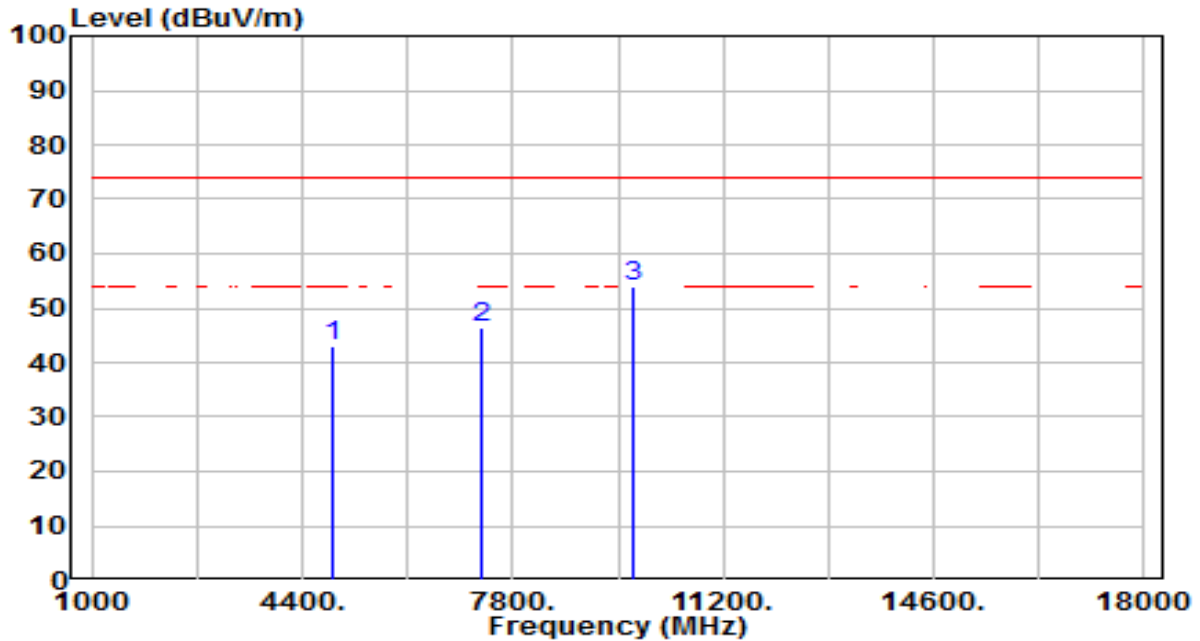


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.52	0.35	42.87	-31.13	74.00	100	325	Peak
2	7311.000	40.53	5.79	46.32	-27.68	74.00	100	5	Peak
3	* 9748.000	48.64	5.34	53.98	-20.02	74.00	100	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

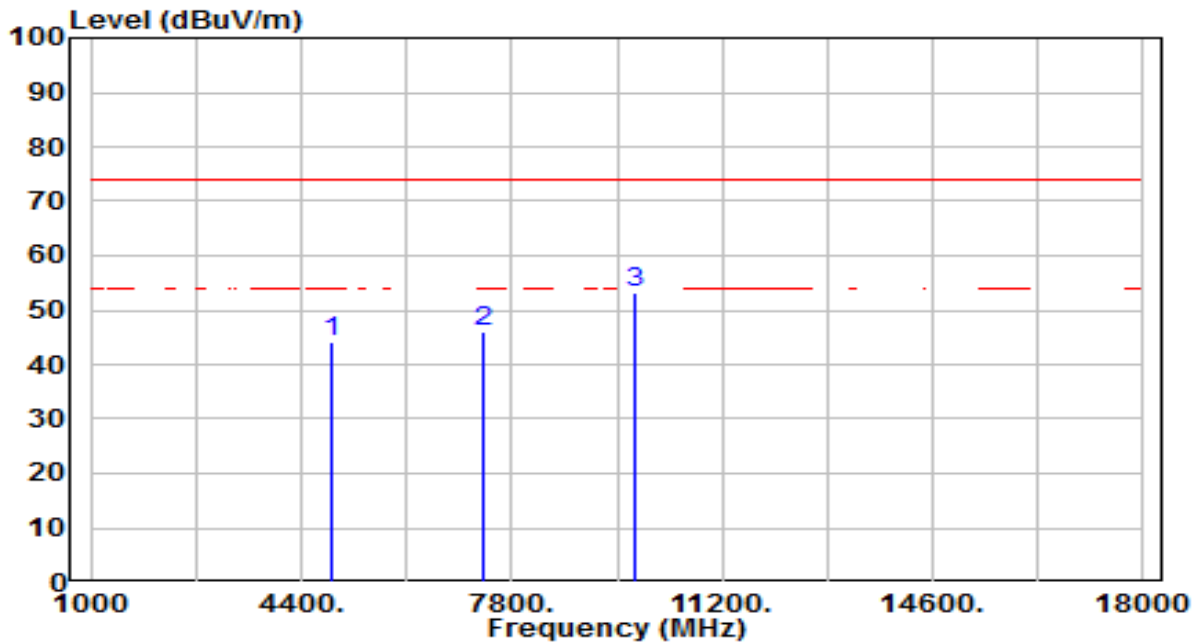


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	43.60	0.41	44.01	-29.99	74.00	200	270	Peak
2	7356.000	40.16	5.78	45.94	-28.06	74.00	200	160	Peak
3	* 9808.000	47.91	5.35	53.27	-20.73	74.00	200	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

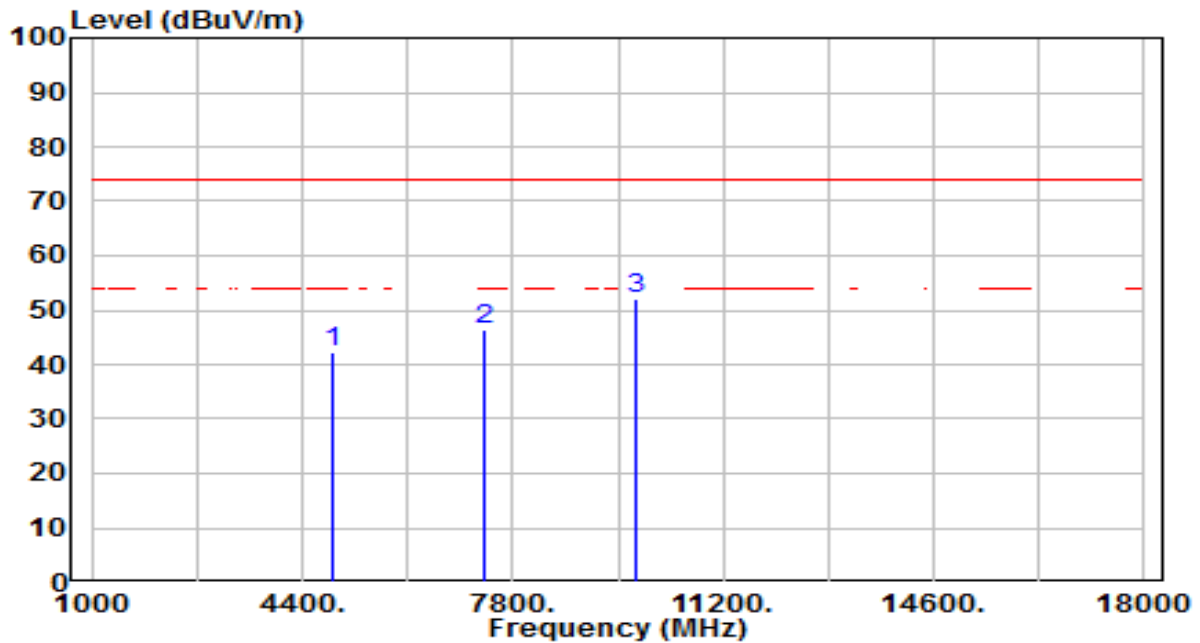

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	41.93	0.41	42.34	-31.66	74.00	100	90	Peak
2	7356.000	40.62	5.78	46.40	-27.60	74.00	100	65	Peak
3	* 9808.000	46.72	5.35	52.07	-21.93	74.00	100	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

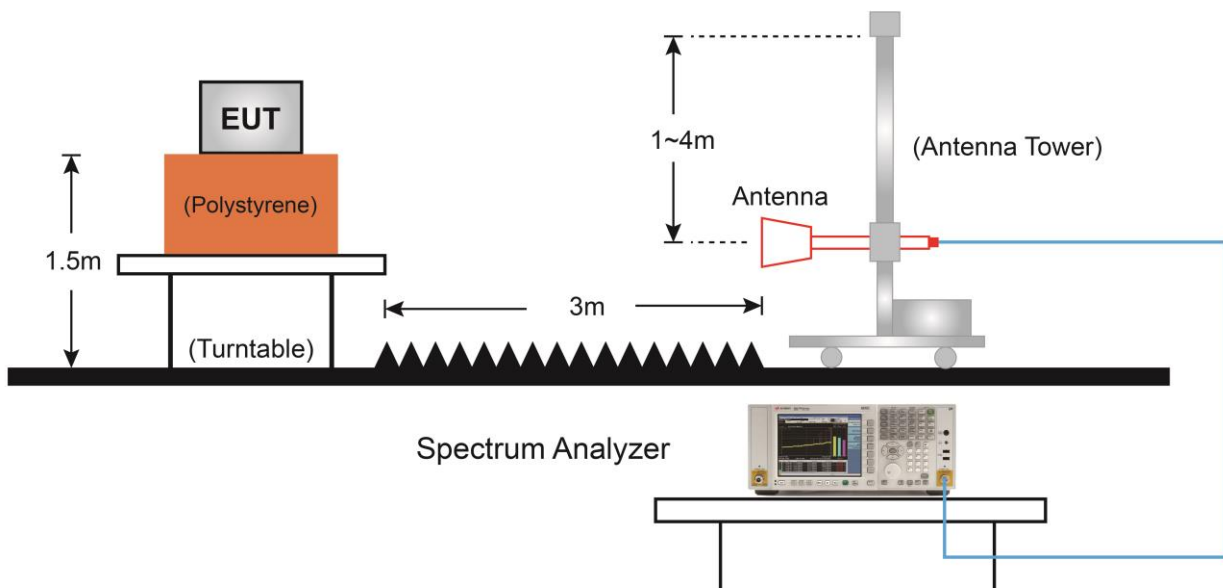

7.7.5. Test Result

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

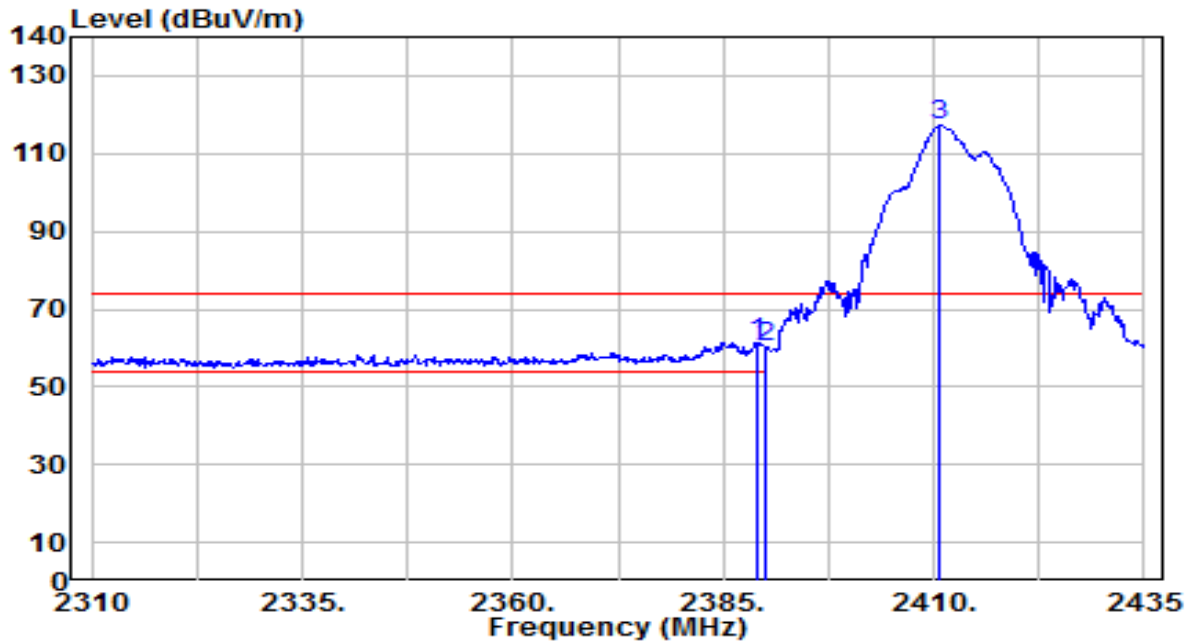


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.000	30.91	30.61	61.52	-12.48	74.00	220	140	Peak
2	2390.000	29.45	30.61	60.07	-13.93	74.00	220	140	Peak
3	2410.750	86.65	30.66	117.32	N/A	N/A	220	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

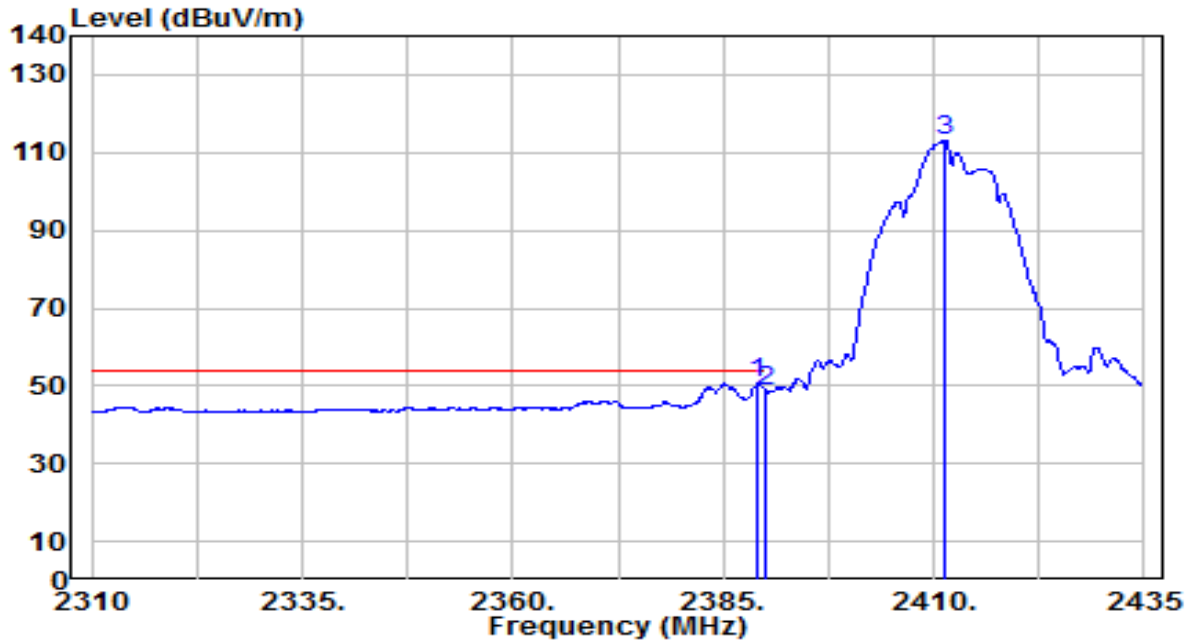


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.000	20.00	30.61	50.61	-3.39	54.00	220	140	Average
2	2390.000	18.21	30.61	48.82	-5.18	54.00	220	140	Average
3	2411.250	82.61	30.67	113.28	N/A	N/A	220	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

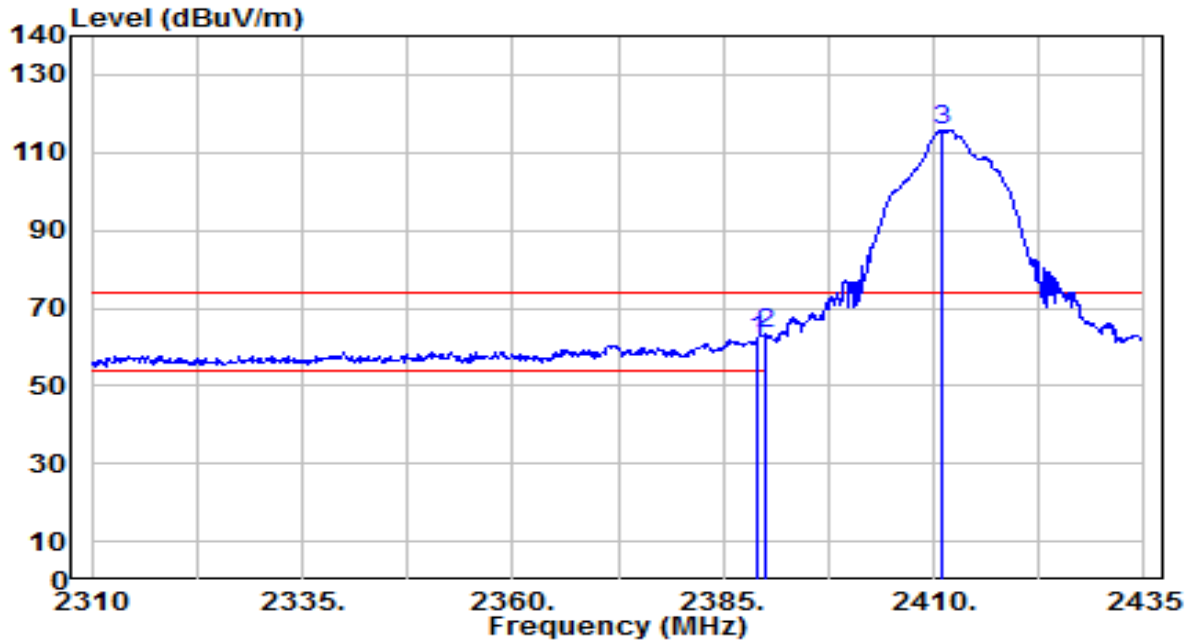


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	31.25	30.61	61.86	-12.14	74.00	105	210	Peak
2	* 2390.000	32.58	30.61	63.19	-10.81	74.00	105	210	Peak
3	2411.000	85.24	30.67	115.91	N/A	N/A	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

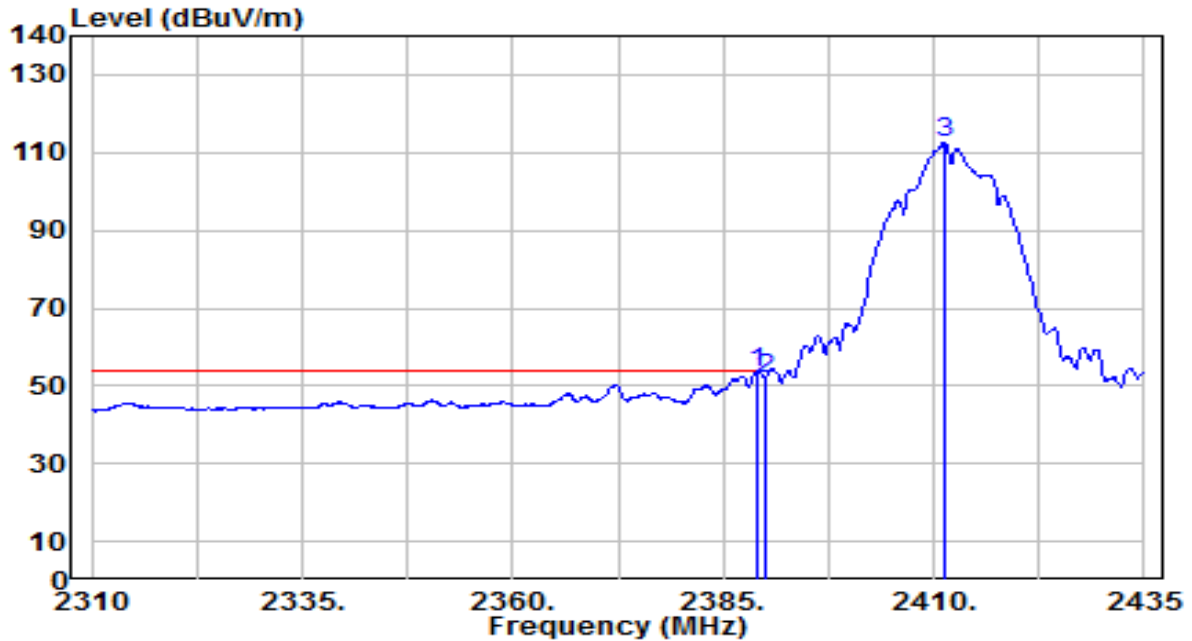


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.000	23.00	30.61	53.62	-0.38	54.00	105	210	Average
2	2390.000	21.14	30.61	51.76	-2.24	54.00	105	210	Average
3	2411.250	81.80	30.67	112.46	N/A	N/A	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

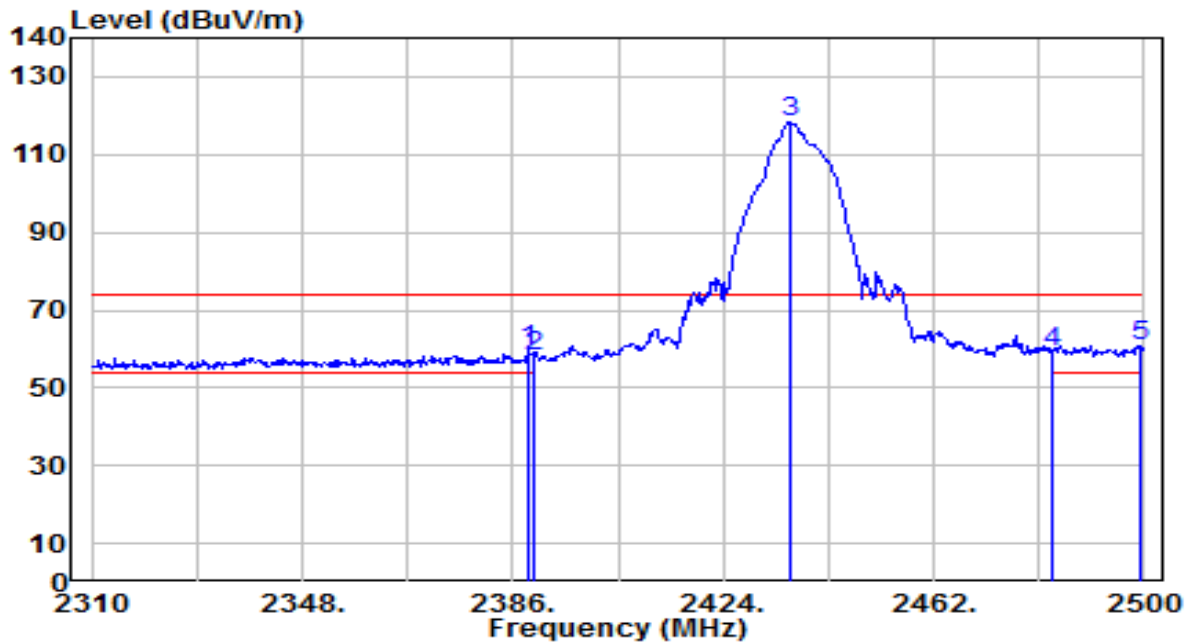


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	28.90	30.61	59.51	-14.49	74.00	215	135	Peak
2	2390.000	27.76	30.61	58.37	-15.63	74.00	215	135	Peak
3	2435.970	87.66	30.75	118.41	N/A	N/A	215	135	Peak
4	2483.500	28.29	30.91	59.20	-14.80	74.00	215	135	Peak
5	* 2499.240	30.03	30.97	61.00	-13.00	74.00	215	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

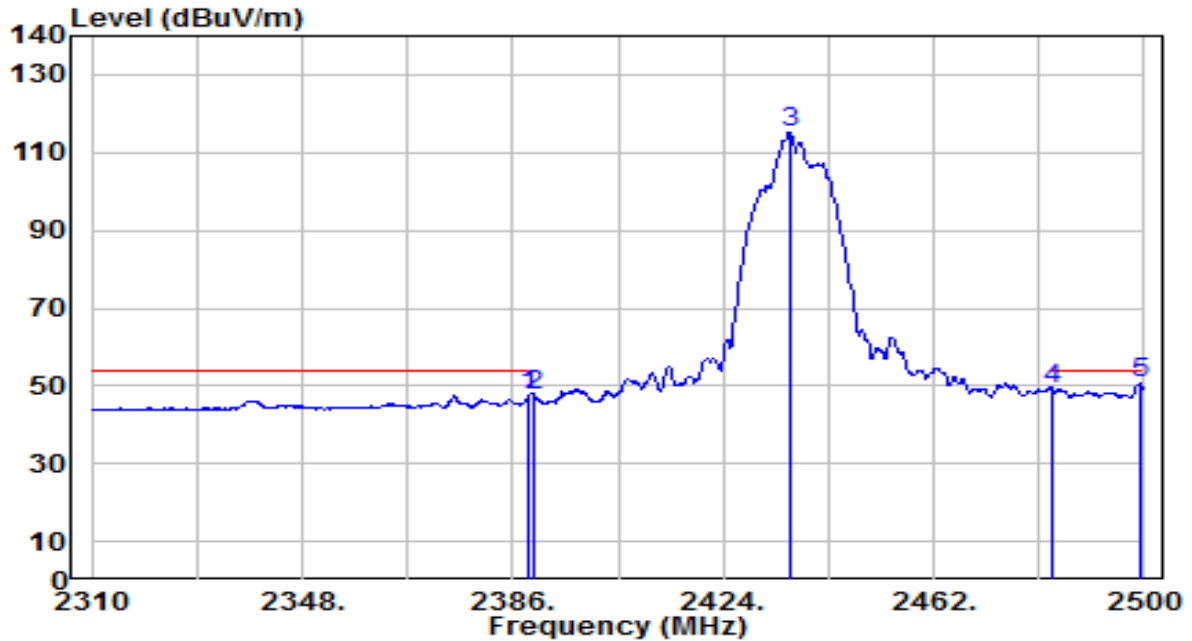


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	17.06	30.61	47.67	-6.33	54.00	215	135	Average
2	2390.000	16.83	30.61	47.45	-6.55	54.00	215	135	Average
3	2435.970	84.36	30.75	115.11	N/A	N/A	215	135	Average
4	2483.500	18.10	30.91	49.01	-4.99	54.00	215	135	Average
5	* 2499.240	19.49	30.97	50.46	-3.54	54.00	215	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

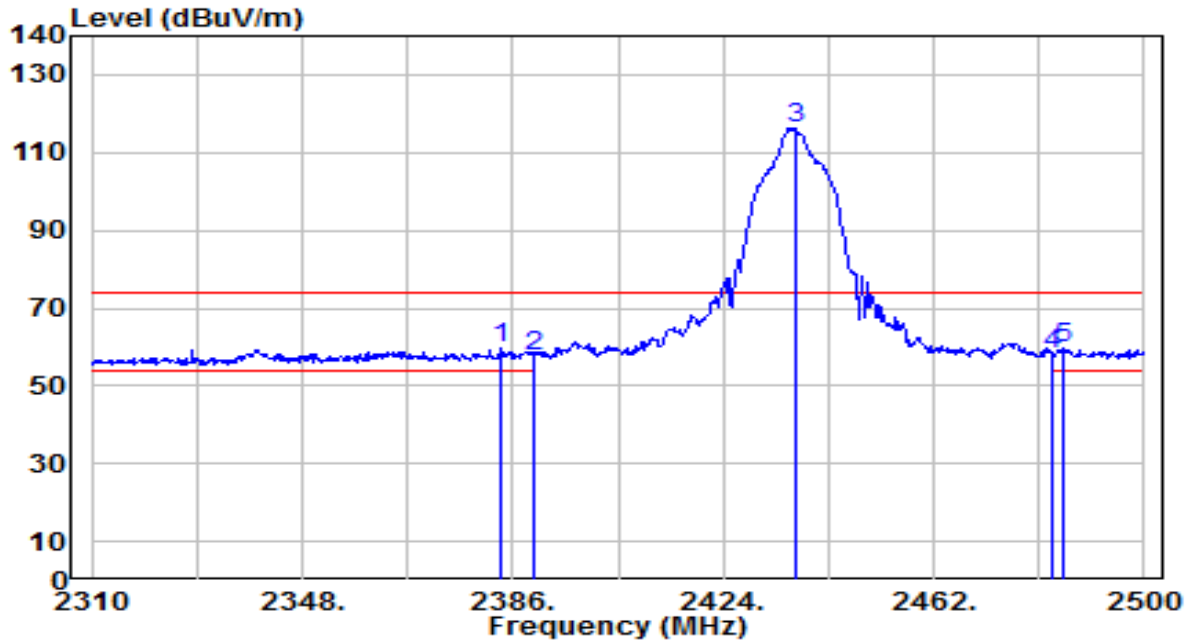


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.910	28.91	30.61	59.51	-14.49	74.00	110	210	Peak
2	2390.000	27.13	30.61	57.74	-16.26	74.00	110	210	Peak
3	2436.920	85.56	30.75	116.32	N/A	N/A	110	210	Peak
4	2483.500	27.42	30.91	58.34	-15.66	74.00	110	210	Peak
5	* 2485.180	28.84	30.92	59.76	-14.24	74.00	110	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

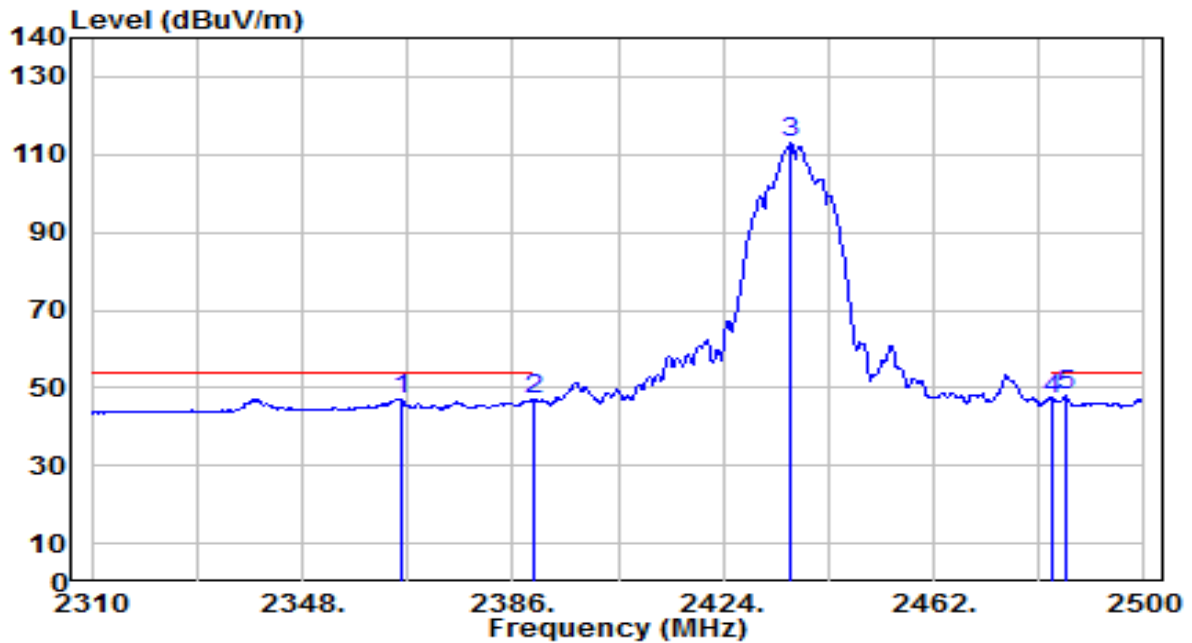


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2366.050	16.56	30.58	47.14	-6.86	54.00	110	210	Average
2	2390.000	16.49	30.61	47.11	-6.89	54.00	110	210	Average
3	2436.350	82.27	30.75	113.02	N/A	N/A	110	210	Average
4	2483.500	16.18	30.91	47.09	-6.91	54.00	110	210	Average
5	* 2485.750	17.05	30.92	47.97	-6.03	54.00	110	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

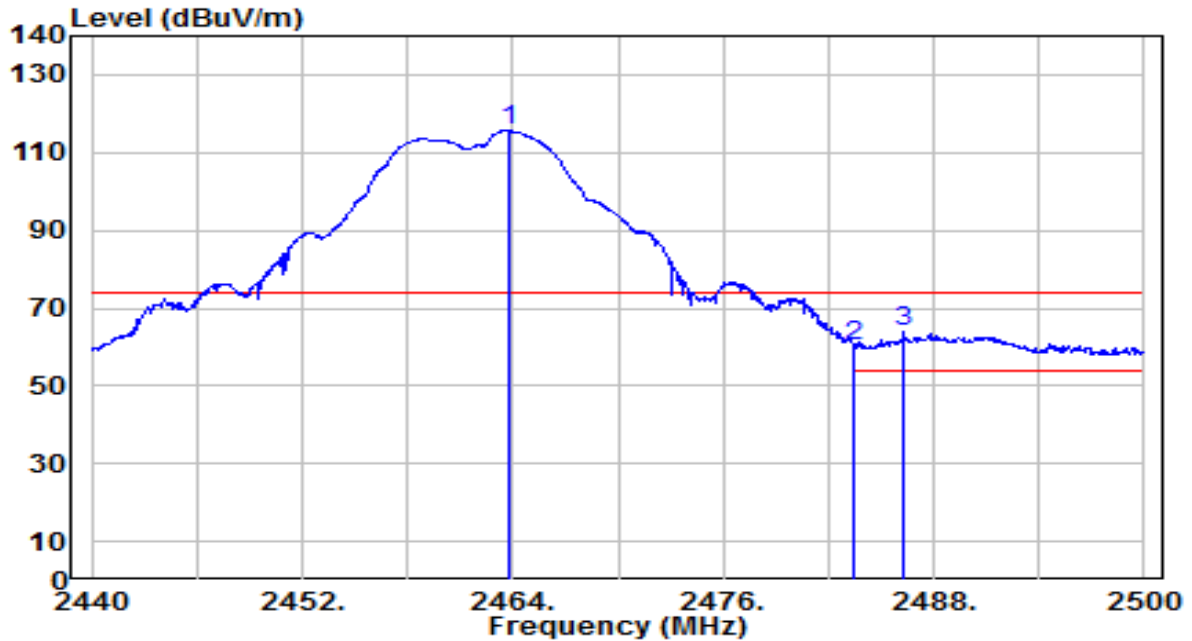


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.760	84.77	30.85	115.62	N/A	N/A	210	130	Peak
2	2483.500	29.40	30.91	60.32	-13.68	74.00	210	130	Peak
3	* 2486.320	32.79	30.92	63.71	-10.29	74.00	210	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

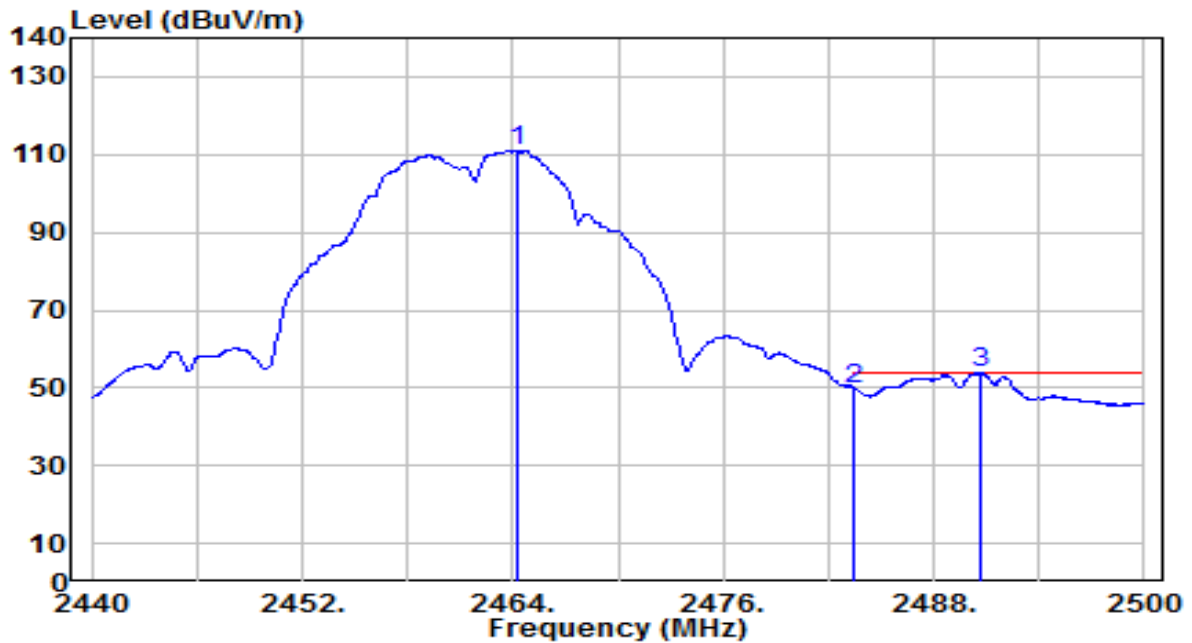


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.240	80.35	30.85	111.20	N/A	N/A	210	130	Average
2	2483.500	18.87	30.91	49.79	-4.21	54.00	210	130	Average
3	* 2490.700	22.89	30.94	53.83	-0.17	54.00	210	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

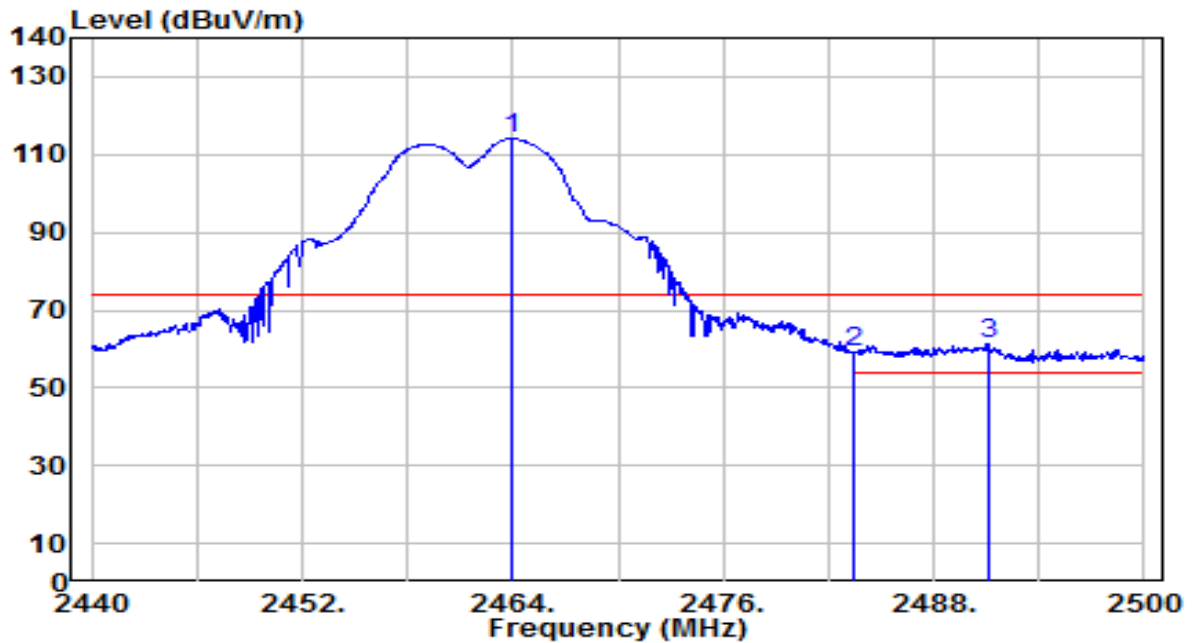


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.940	83.17	30.85	114.02	N/A	N/A	100	210	Peak
2	2483.500	28.36	30.91	59.28	-14.72	74.00	100	210	Peak
3	* 2491.120	30.13	30.94	61.07	-12.93	74.00	100	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

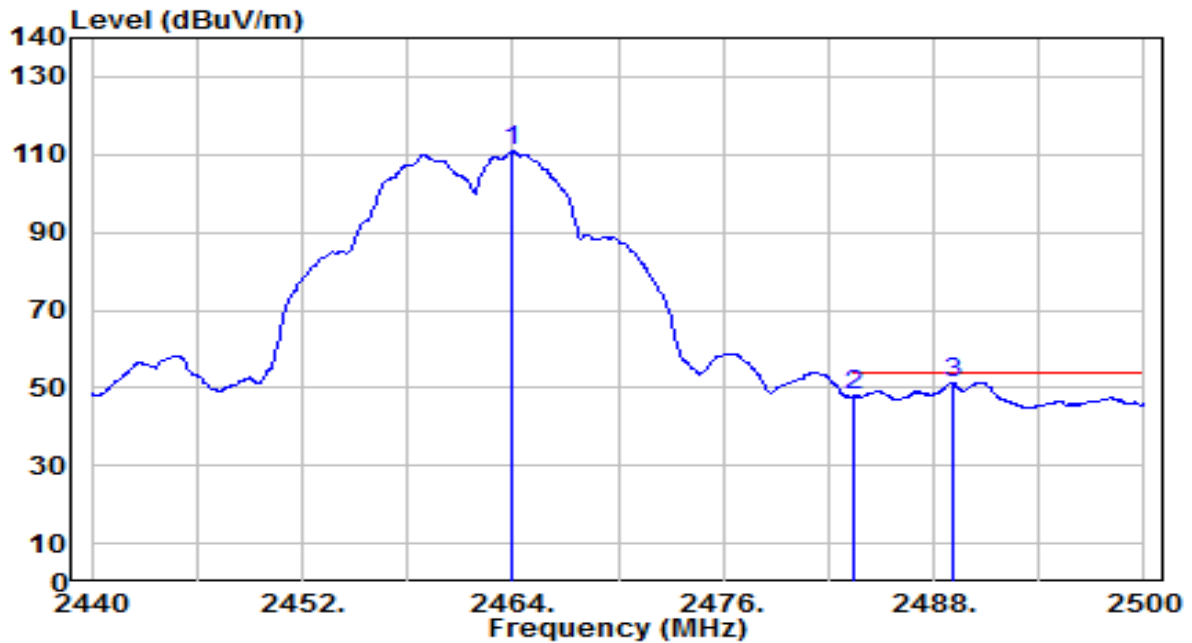


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.000	79.92	30.85	110.77	N/A	N/A	100	210	Average
2	2483.500	16.97	30.91	47.88	-6.12	54.00	100	210	Average
3	* 2489.080	20.53	30.93	51.46	-2.54	54.00	100	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

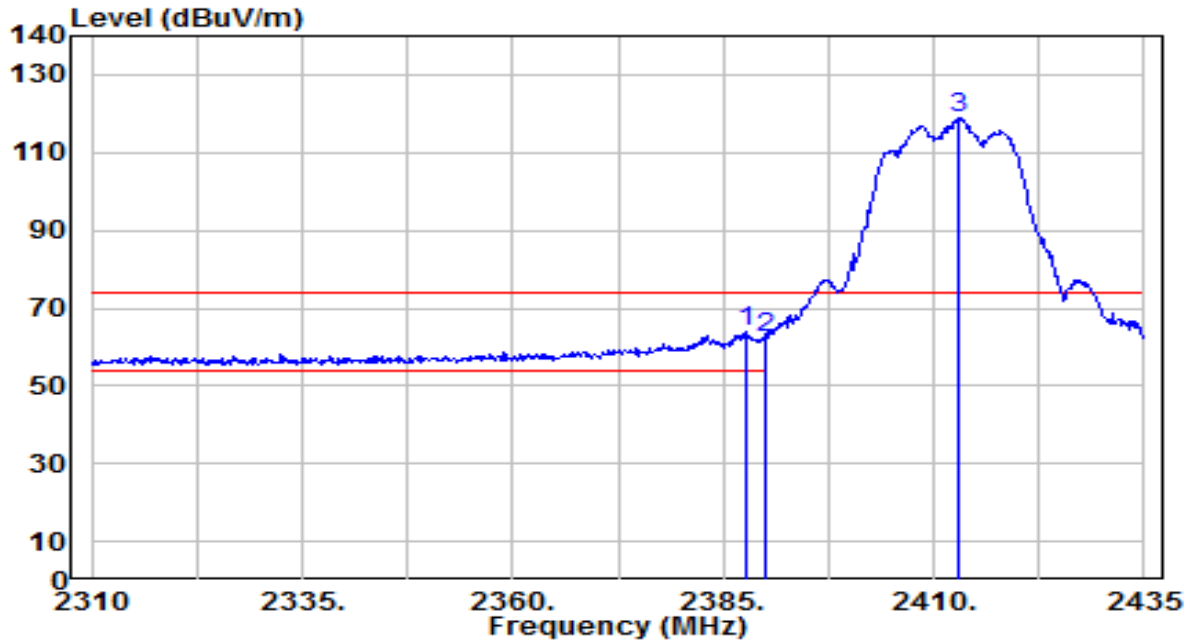


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.625	33.24	30.61	63.85	-10.15	74.00	225	140	Peak
2	2390.000	31.94	30.61	62.55	-11.45	74.00	225	140	Peak
3	2412.875	88.24	30.67	118.92	N/A	N/A	225	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

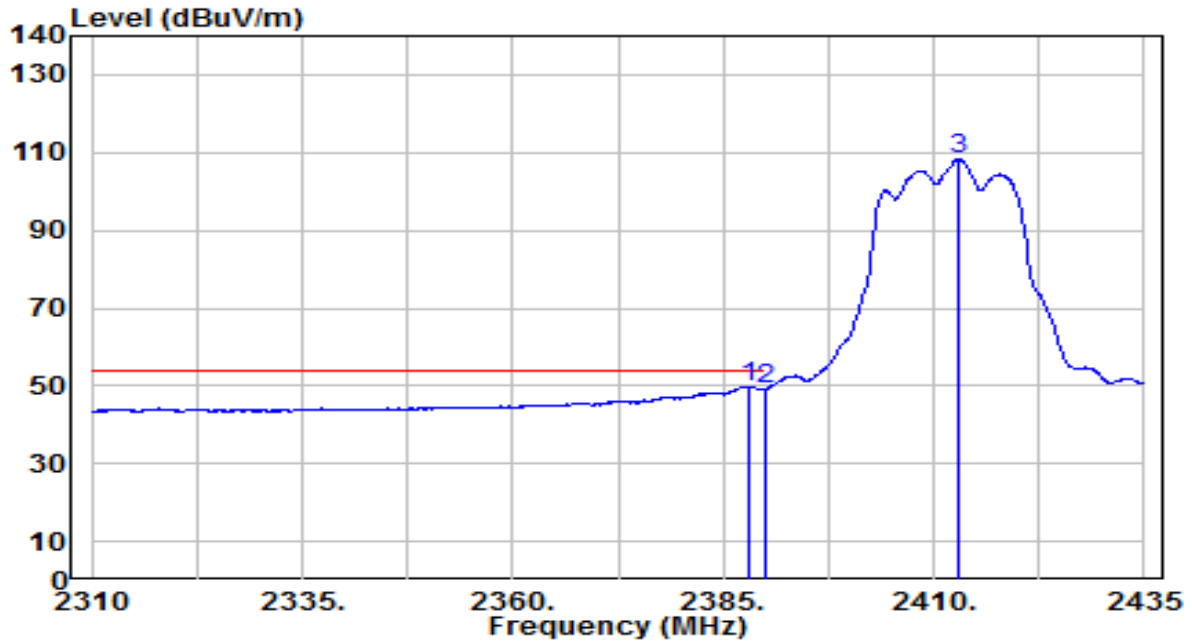


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.000	19.30	30.61	49.91	-4.09	54.00	225	140	Average
2		2390.000	18.43	30.61	49.05	-4.95	54.00	225	140	Average
3		2413.000	77.69	30.67	108.37	N/A	N/A	225	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

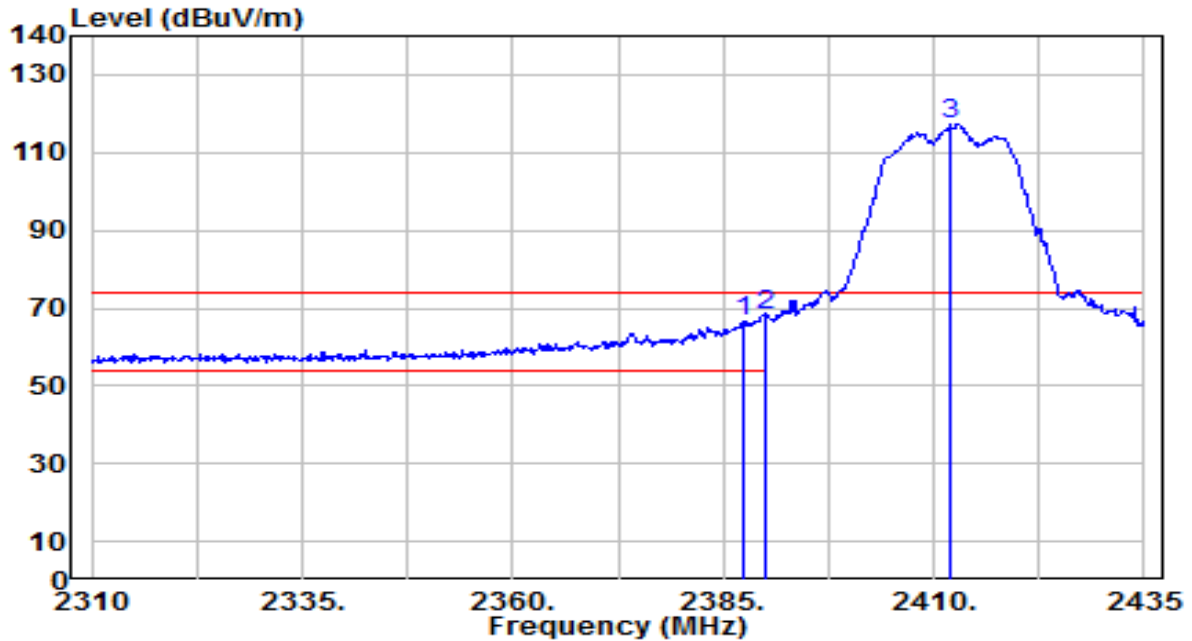


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.375	36.18	30.61	66.79	-7.21	74.00	100	210	Peak
2	* 2390.000	37.46	30.61	68.07	-5.93	74.00	100	210	Peak
3	2412.000	86.84	30.67	117.51	N/A	N/A	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

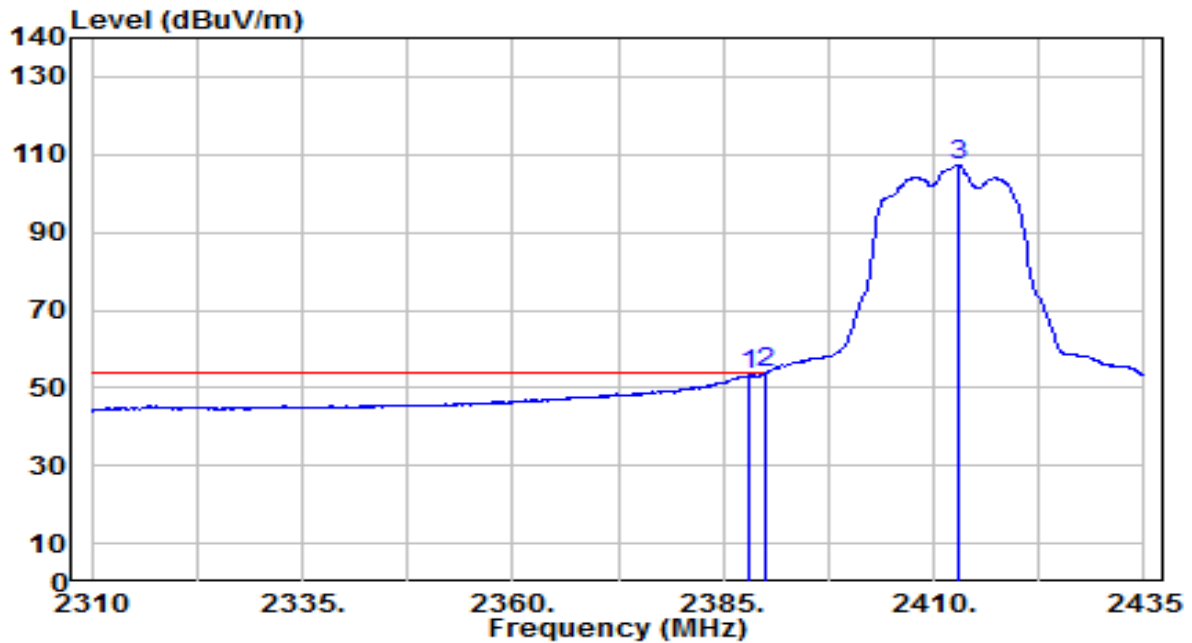


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.125	22.76	30.61	53.38	-0.62	54.00	100	210	Average
2	* 2390.000	23.22	30.61	53.84	-0.16	54.00	100	210	Average
3	2412.875	76.64	30.67	107.32	N/A	N/A	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

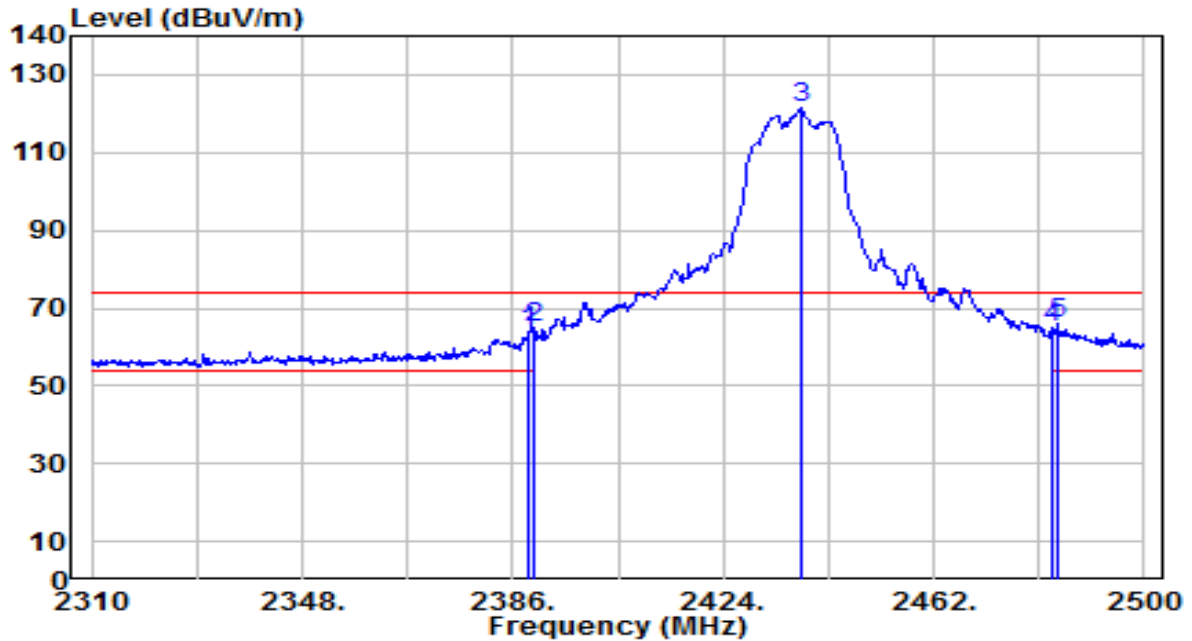


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	33.27	30.61	63.88	-10.12	74.00	215	140	Peak
2	2390.000	34.24	30.61	64.85	-9.15	74.00	215	140	Peak
3	2438.060	90.49	30.76	121.25	N/A	N/A	215	140	Peak
4	2483.500	34.01	30.91	64.92	-9.08	74.00	215	140	Peak
5	* 2484.610	35.23	30.92	66.15	-7.85	74.00	215	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

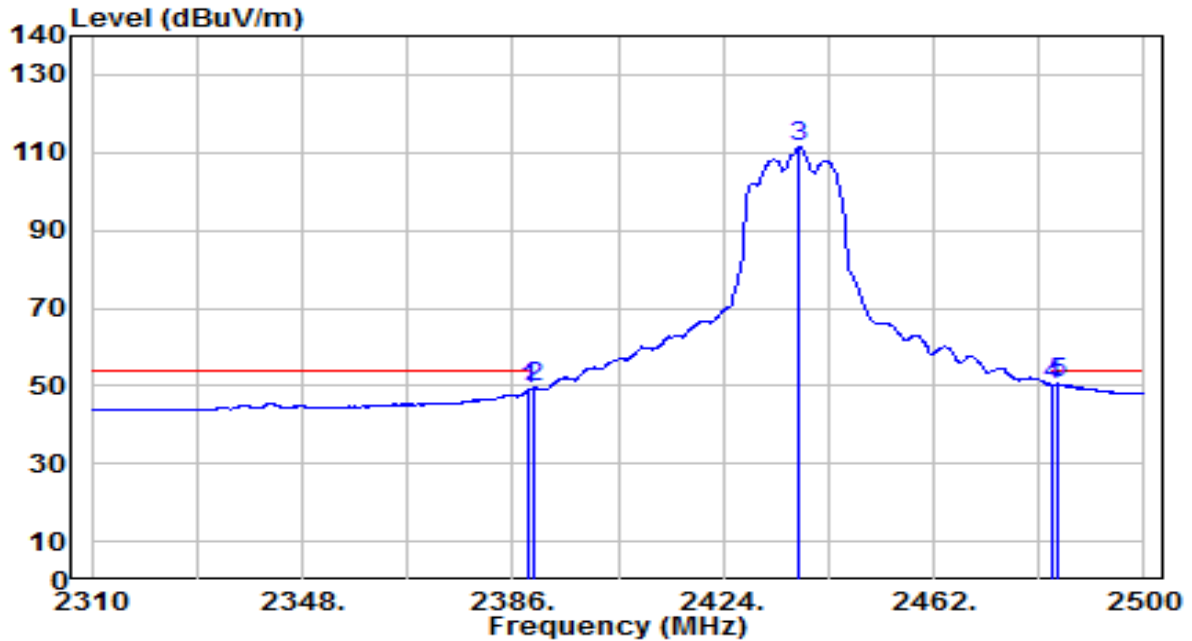


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	18.32	30.61	48.93	-5.07	54.00	215	140	Average
2	2390.000	18.95	30.61	49.56	-4.44	54.00	215	140	Average
3	2437.680	80.53	30.76	111.29	N/A	N/A	215	140	Average
4	2483.500	19.36	30.91	50.28	-3.72	54.00	215	140	Average
5	* 2484.420	19.58	30.92	50.49	-3.51	54.00	215	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

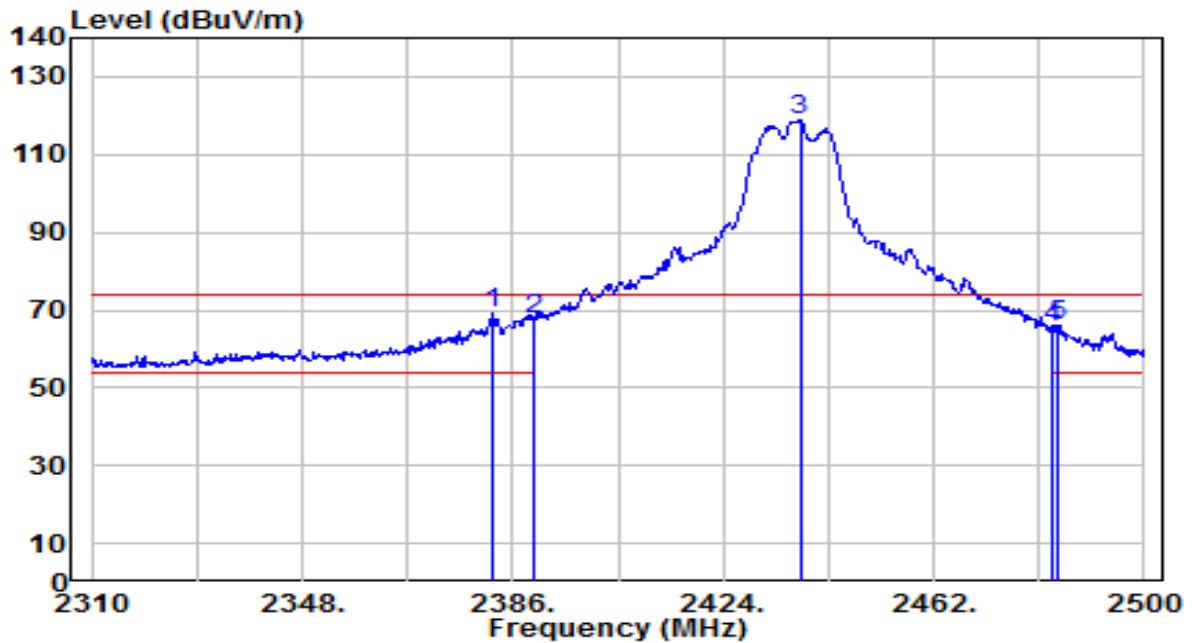


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2382.390	38.40	30.60	69.00	-5.00	74.00	100	210	Peak
2	2390.000	36.94	30.61	67.55	-6.45	74.00	100	210	Peak
3	2437.870	88.34	30.76	119.09	N/A	N/A	100	210	Peak
4	2483.500	34.61	30.91	65.52	-8.48	74.00	100	210	Peak
5	2484.610	35.19	30.92	66.11	-7.89	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

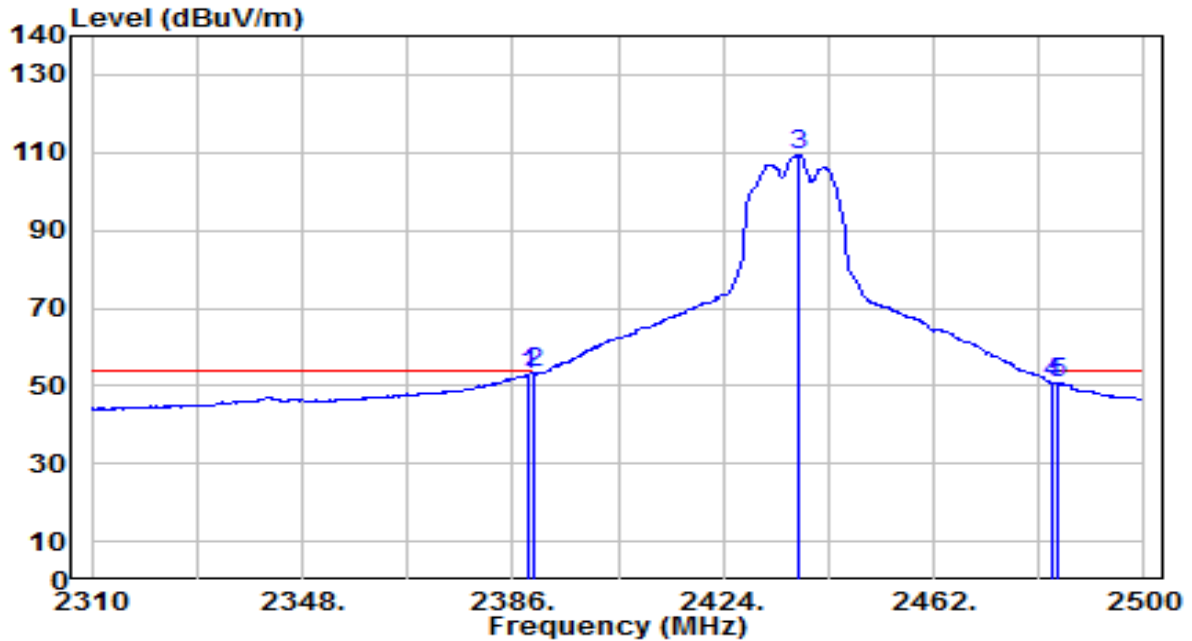


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	22.36	30.61	52.97	-1.03	54.00	100	210	Average
2	* 2390.000	22.58	30.61	53.20	-0.80	54.00	100	210	Average
3	2437.680	78.60	30.76	109.35	N/A	N/A	100	210	Average
4	2483.500	19.73	30.91	50.64	-3.36	54.00	100	210	Average
5	2484.420	19.88	30.92	50.80	-3.20	54.00	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

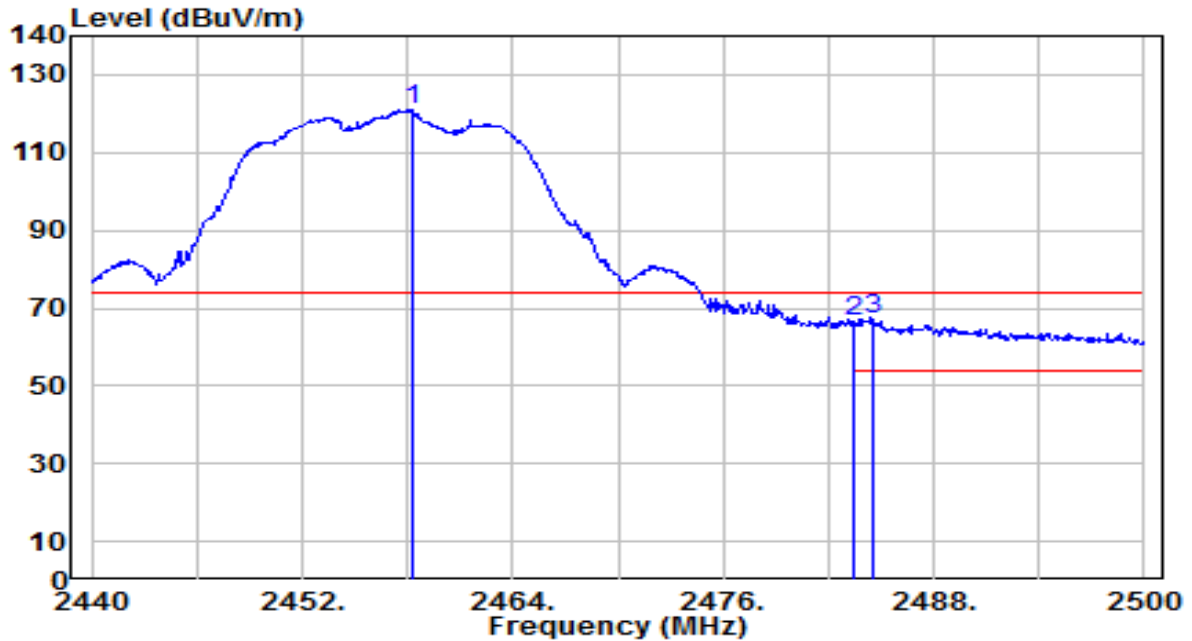


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.240	90.22	30.83	121.05	N/A	N/A	210	135	Peak
2	2483.500	35.62	30.91	66.54	-7.46	74.00	210	135	Peak
3	* 2484.520	36.36	30.92	67.28	-6.72	74.00	210	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

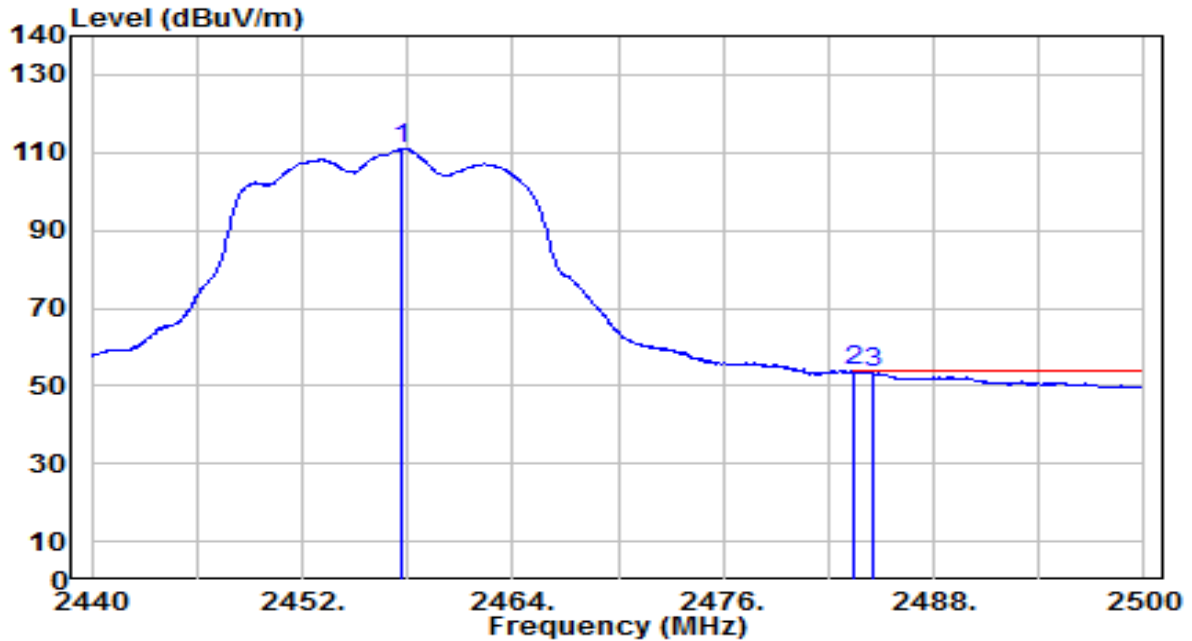


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.700	80.13	30.83	110.96	N/A	N/A	210	135	Average
2	* 2483.500	22.89	30.91	53.81	-0.19	54.00	210	135	Average
3	2484.520	22.50	30.92	53.42	-0.58	54.00	210	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

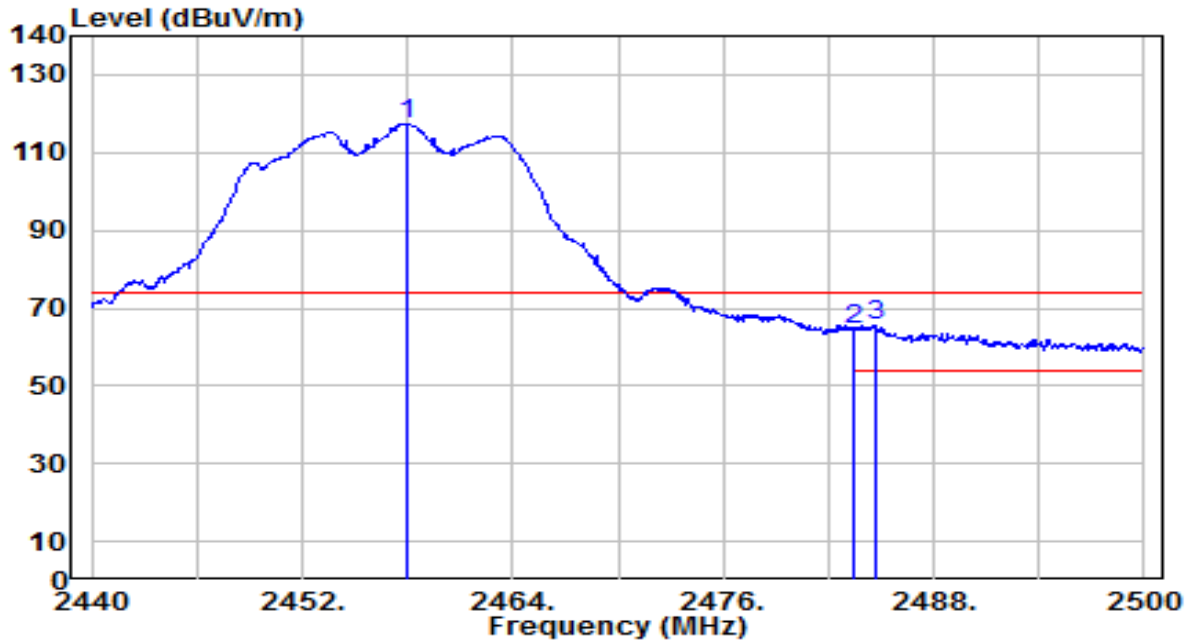


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.940	86.65	30.83	117.48	N/A	N/A	100	130	Peak
2	2483.500	33.54	30.91	64.45	-9.55	74.00	100	130	Peak
3	* 2484.760	34.42	30.92	65.34	-8.66	74.00	100	130	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

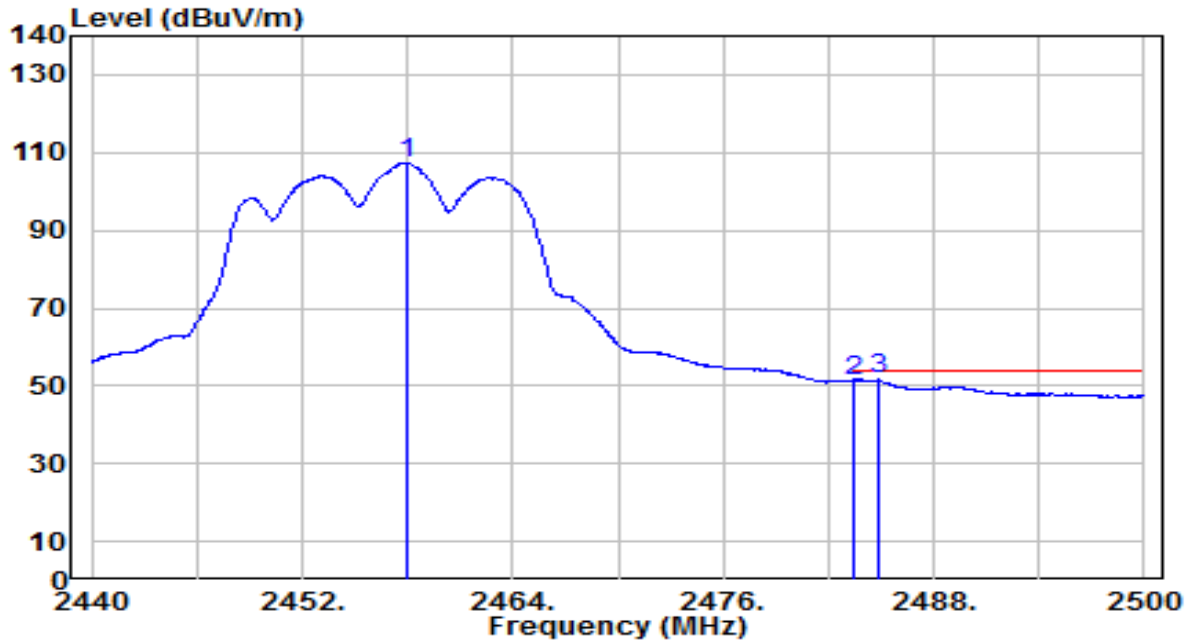


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.940	76.51	30.83	107.34	N/A	N/A	100	130	Average
2	2483.500	20.51	30.91	51.42	-2.58	54.00	100	130	Average
3	* 2484.820	20.60	30.92	51.52	-2.48	54.00	100	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

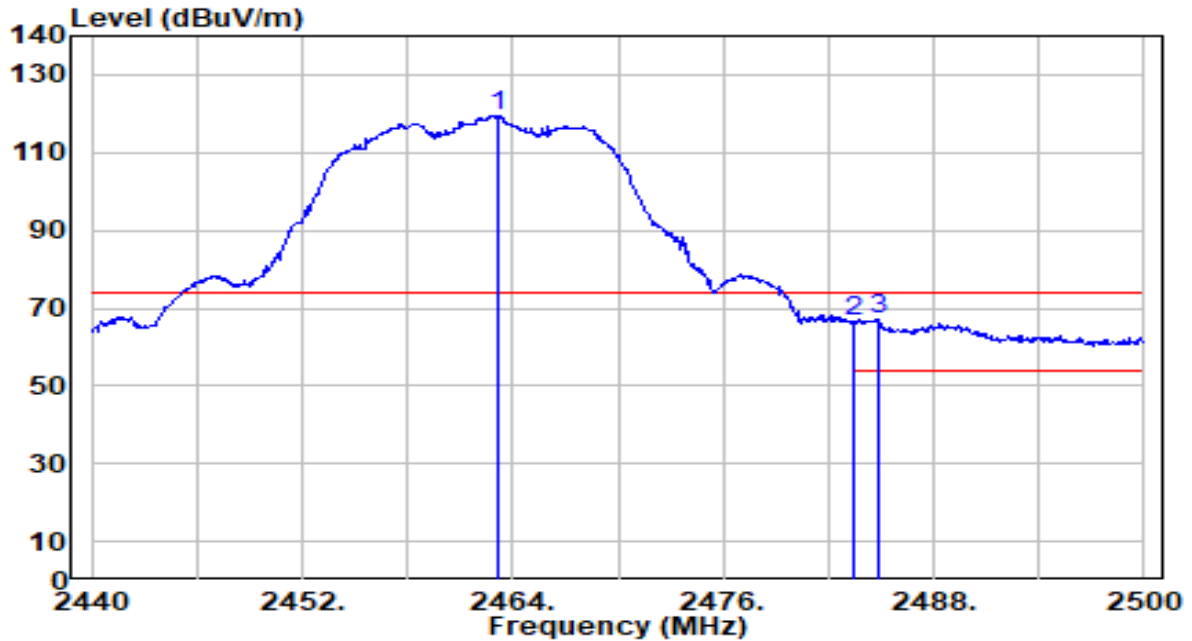


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.160	88.65	30.84	119.49	N/A	N/A	235	145	Peak
2	2483.500	35.62	30.91	66.54	-7.46	74.00	235	145	Peak
3	* 2484.880	36.23	30.92	67.15	-6.85	74.00	235	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

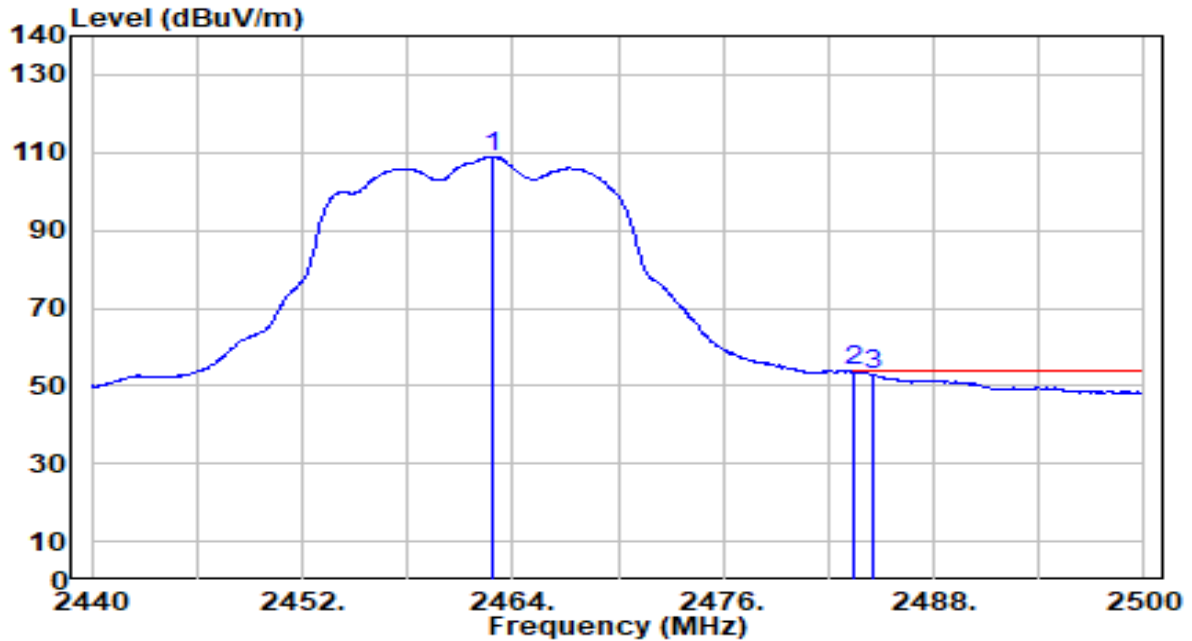


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.860	78.18	30.84	109.03	N/A	N/A	235	145	Average
2	* 2483.500	22.99	30.91	53.90	-0.10	54.00	235	145	Average
3	2484.520	22.10	30.92	53.02	-0.98	54.00	235	145	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

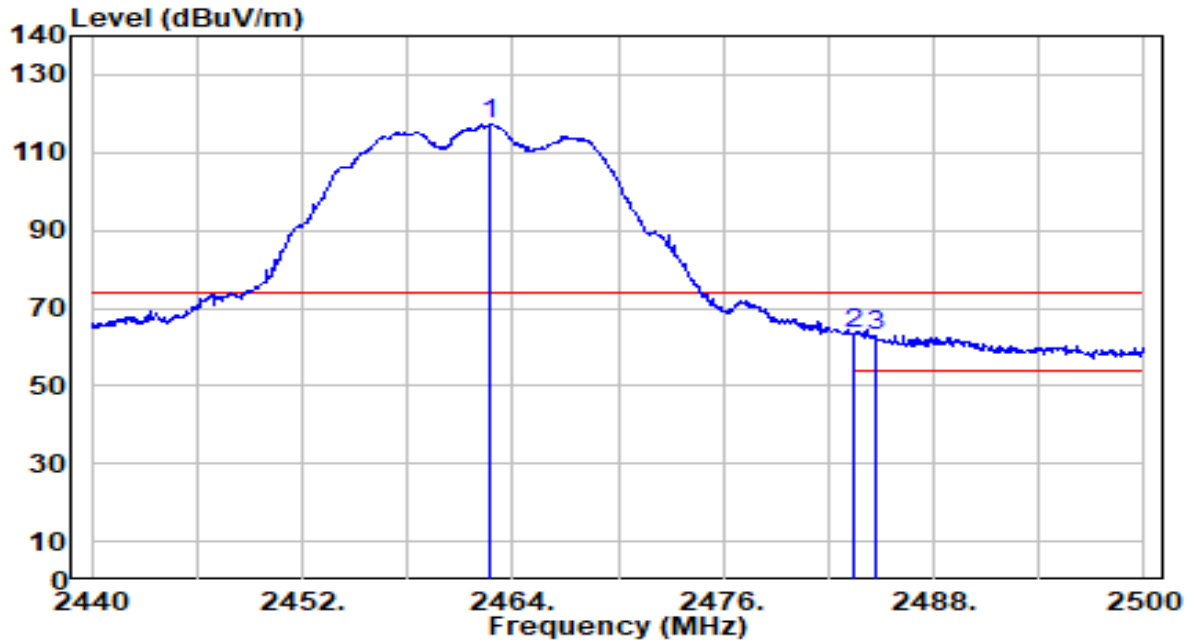


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.680	86.39	30.84	117.23	N/A	N/A	100	210	Peak
2	* 2483.500	32.23	30.91	63.15	-10.85	74.00	100	210	Peak
3	2484.700	31.96	30.92	62.87	-11.13	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

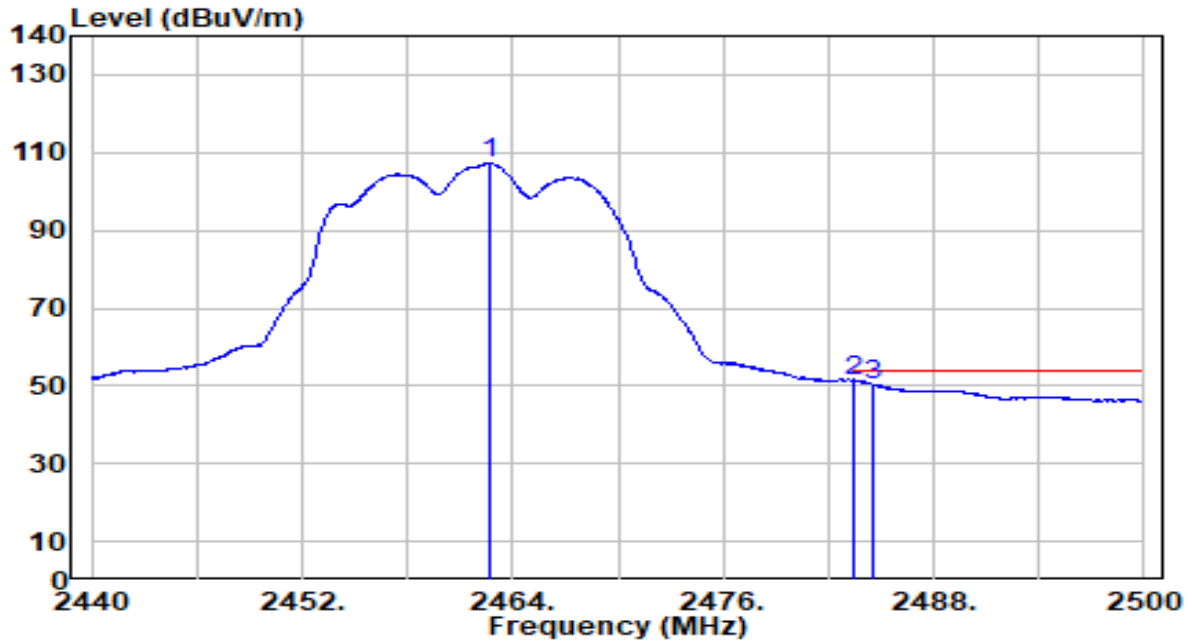


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	76.36	30.84	107.20	N/A	N/A	100	210	Average
2	* 2483.500	20.39	30.91	51.30	-2.70	54.00	100	210	Average
3	2484.580	19.52	30.92	50.44	-3.56	54.00	100	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

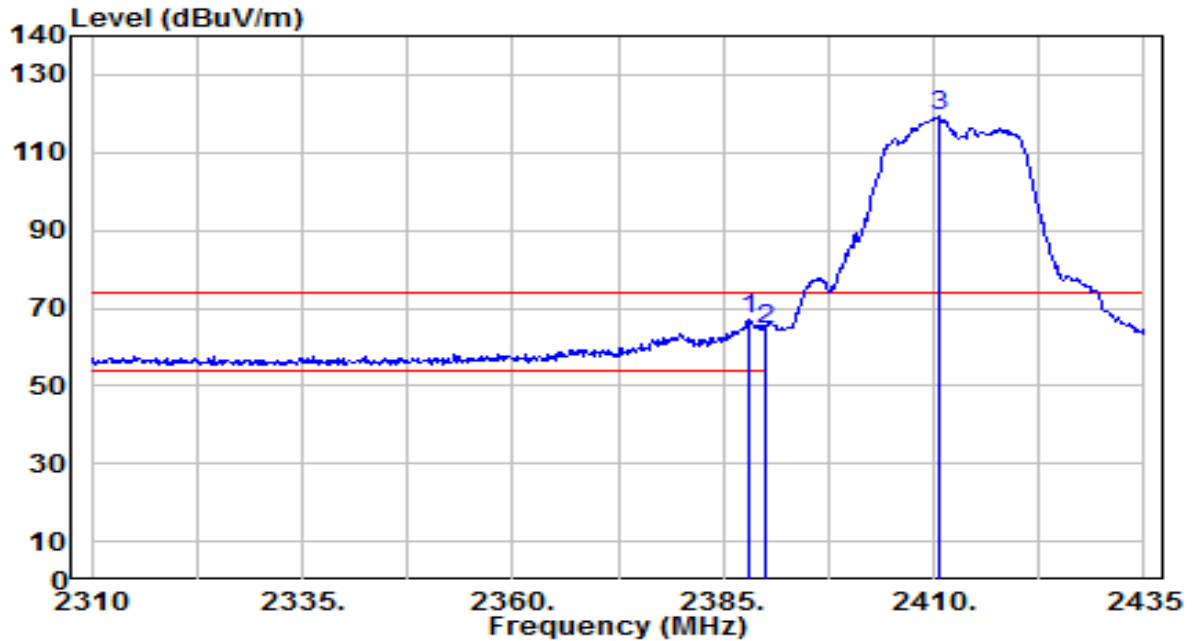


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.000	36.22	30.61	66.83	-7.17	74.00	220	145	Peak
2	2390.000	33.99	30.61	64.60	-9.40	74.00	220	145	Peak
3	2410.500	88.54	30.66	119.20	N/A	N/A	220	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

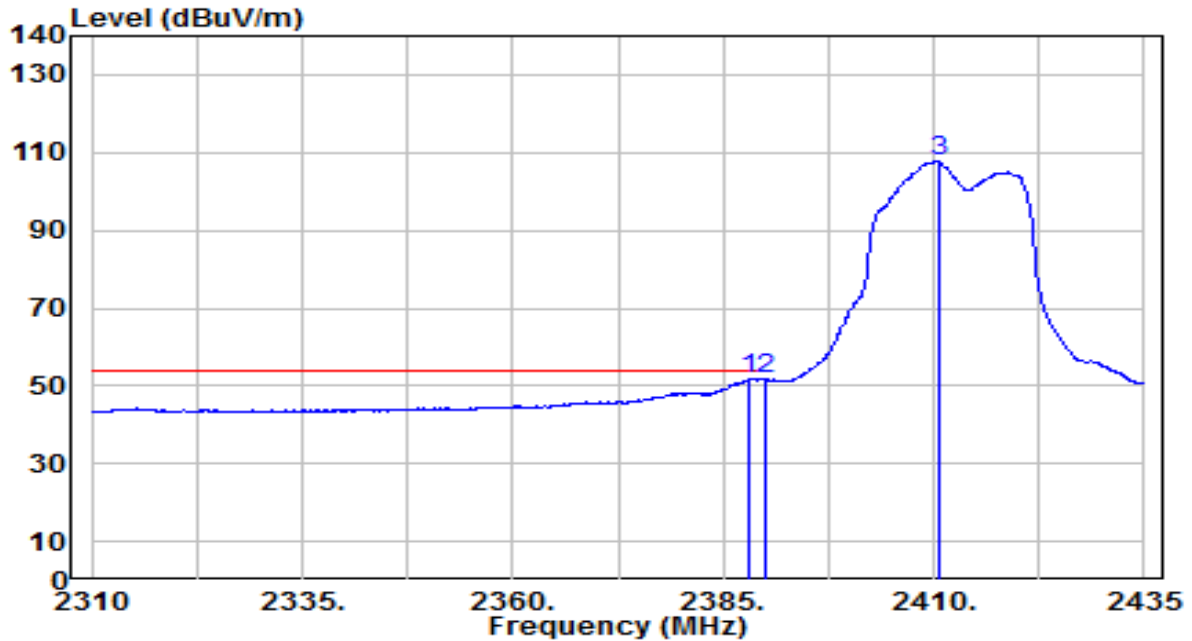


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.125	21.20	30.61	51.81	-2.19	54.00	220	145	Average
2		2390.000	21.06	30.61	51.68	-2.32	54.00	220	145	Average
3		2410.625	77.06	30.66	107.73	N/A	N/A	220	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

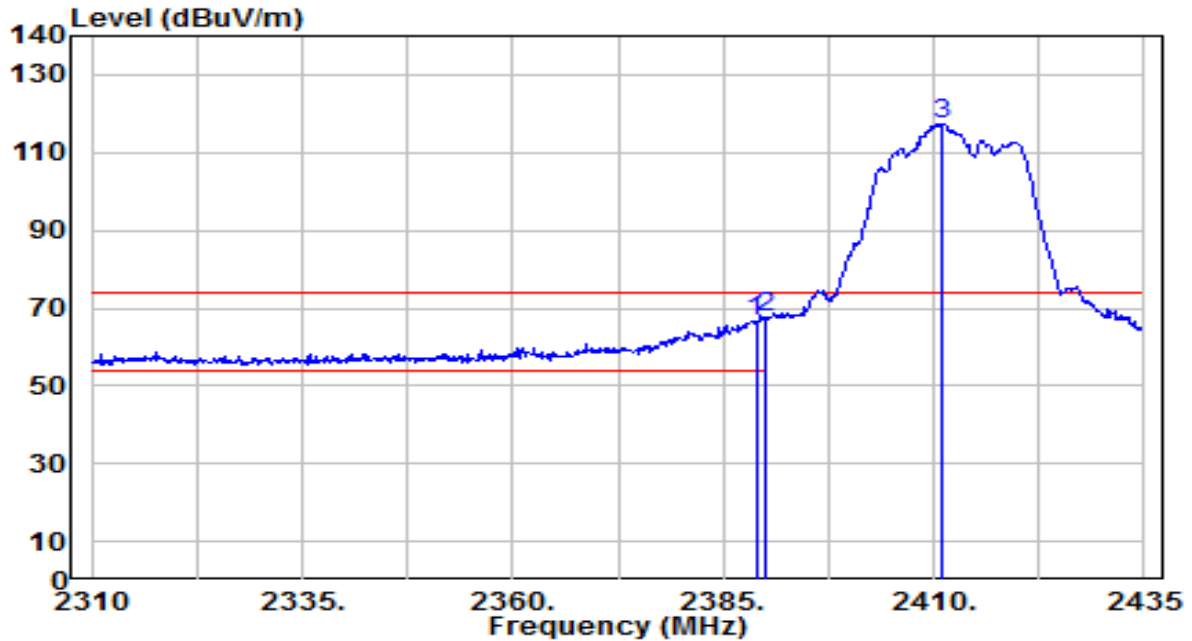


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	36.06	30.61	66.67	-7.33	74.00	100	145	Peak
2	* 2390.000	36.89	30.61	67.50	-6.50	74.00	100	145	Peak
3	2411.125	86.76	30.67	117.43	N/A	N/A	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

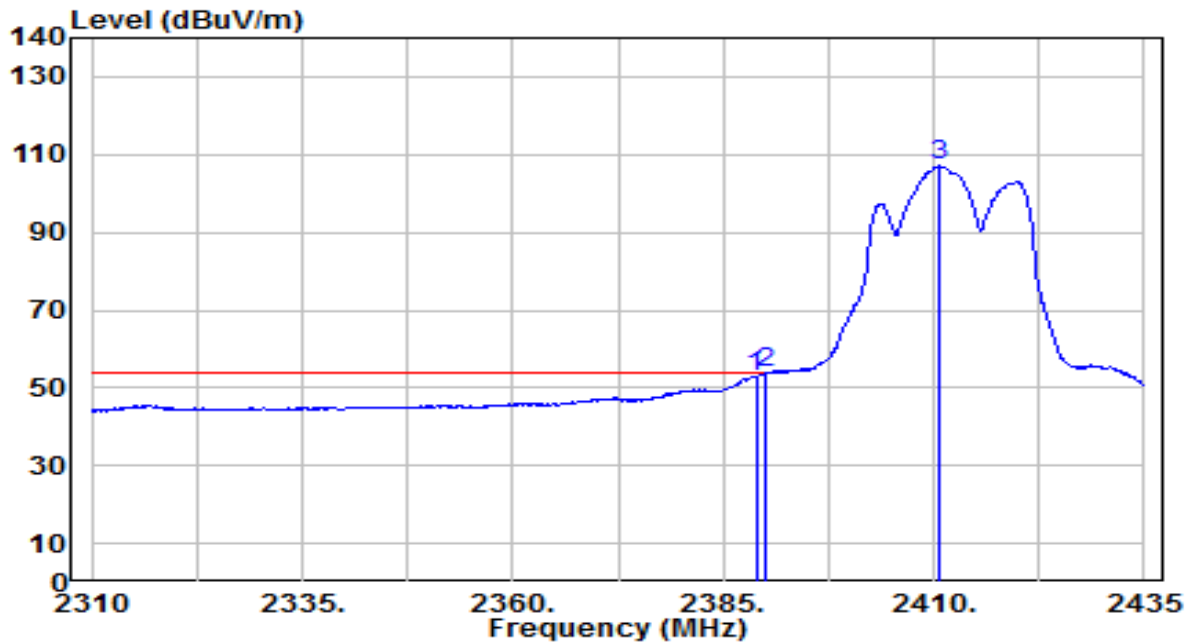


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	22.47	30.61	53.09	-0.91	54.00	100	145	Average
2	* 2390.000	23.20	30.61	53.81	-0.19	54.00	100	145	Average
3	2410.625	76.39	30.66	107.06	N/A	N/A	100	145	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

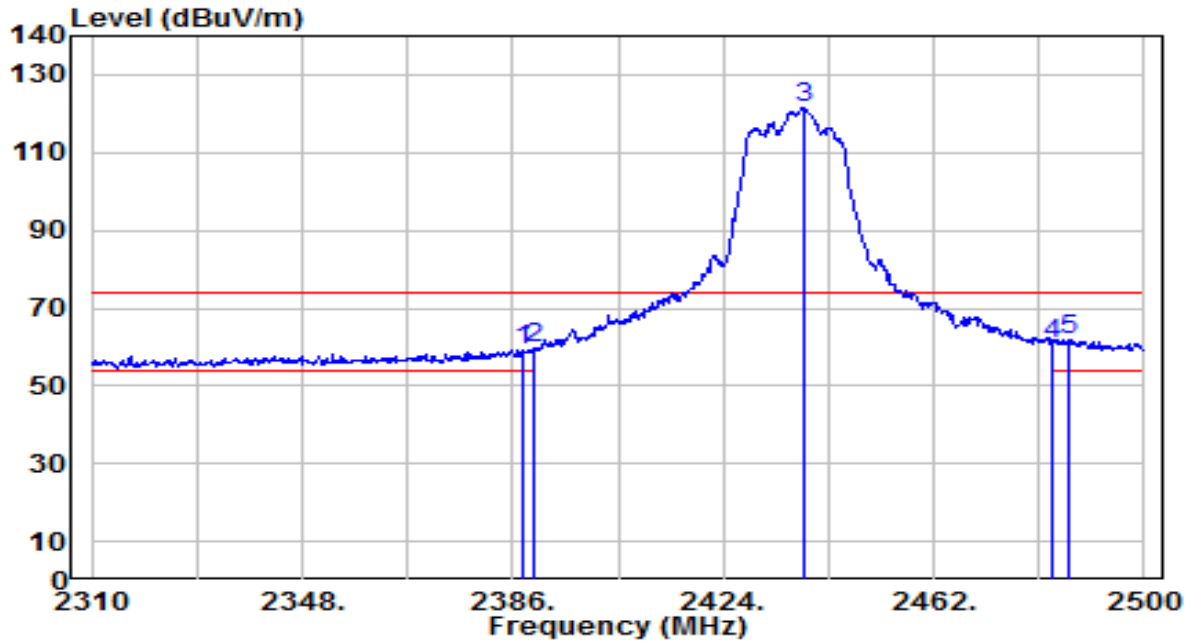


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	28.72	30.61	59.33	-14.67	74.00	215	140	Peak
2	2390.000	29.31	30.61	59.93	-14.07	74.00	215	140	Peak
3	2438.820	90.84	30.76	121.60	N/A	N/A	215	140	Peak
4	2483.500	29.85	30.91	60.76	-13.24	74.00	215	140	Peak
5	* 2486.320	30.91	30.92	61.84	-12.16	74.00	215	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

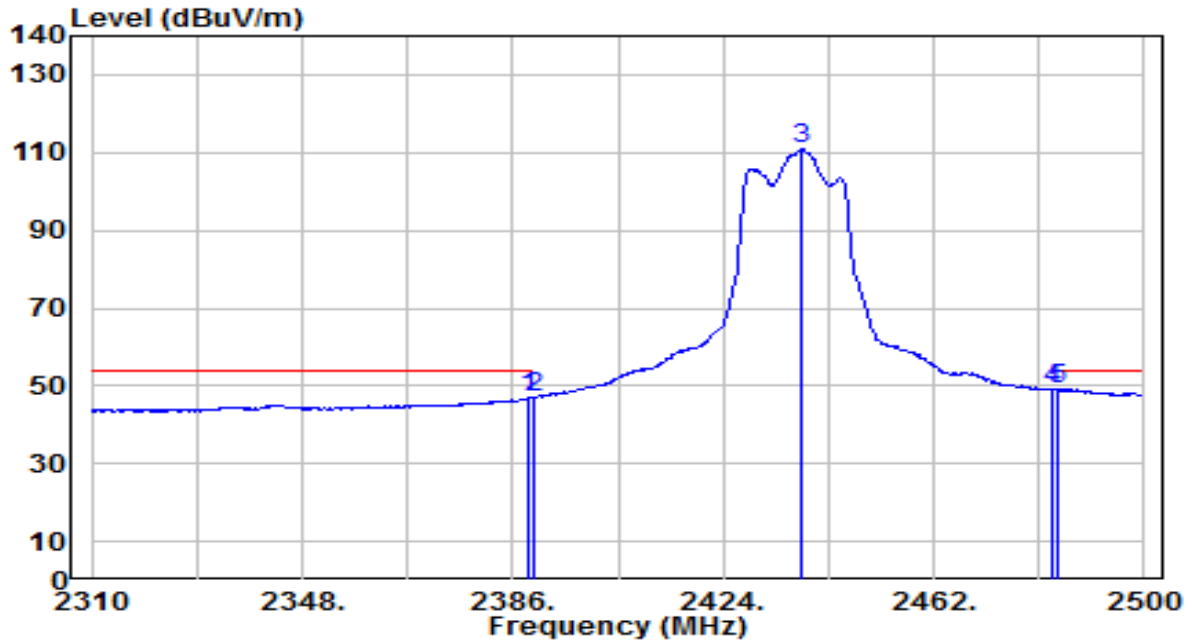


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	16.32	30.61	46.93	-7.07	54.00	215	140	Average
2	2390.000	16.38	30.61	47.00	-7.00	54.00	215	140	Average
3	2438.250	80.11	30.76	110.86	N/A	N/A	215	140	Average
4	* 2483.500	18.26	30.91	49.17	-4.83	54.00	215	140	Average
5	2484.610	18.22	30.92	49.13	-4.87	54.00	215	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

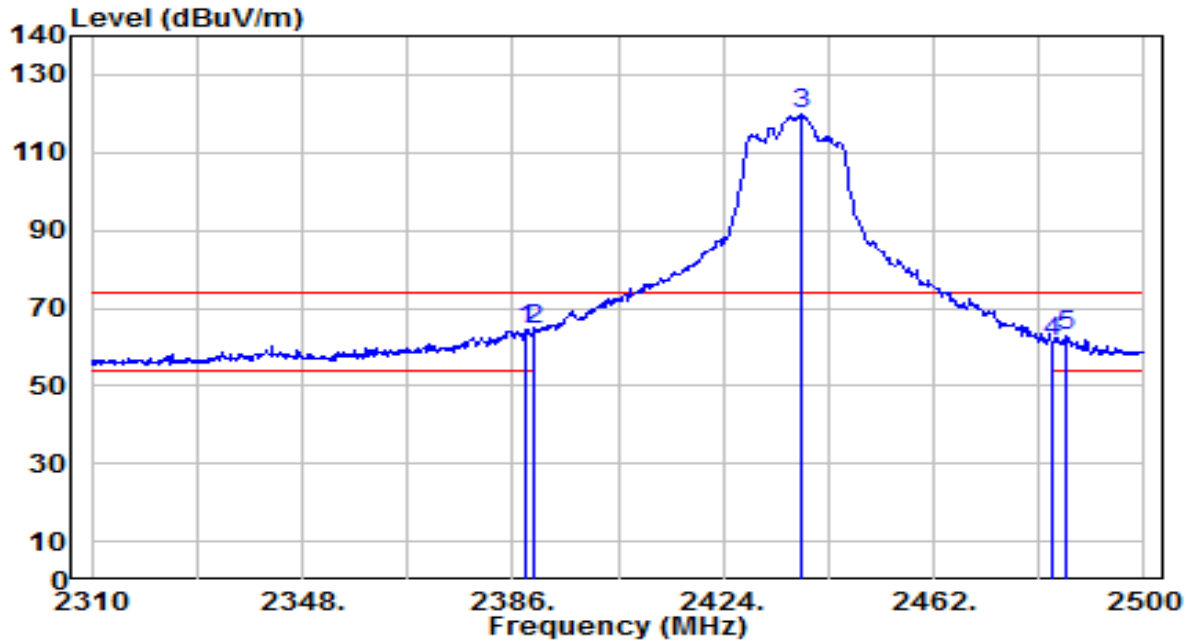


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	33.61	30.61	64.22	-9.78	74.00	100	210	Peak
2	* 2390.000	33.75	30.61	64.36	-9.64	74.00	100	210	Peak
3	2438.060	89.30	30.76	120.06	N/A	N/A	100	210	Peak
4	2483.500	30.11	30.91	61.03	-12.97	74.00	100	210	Peak
5	2486.130	31.85	30.92	62.78	-11.22	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

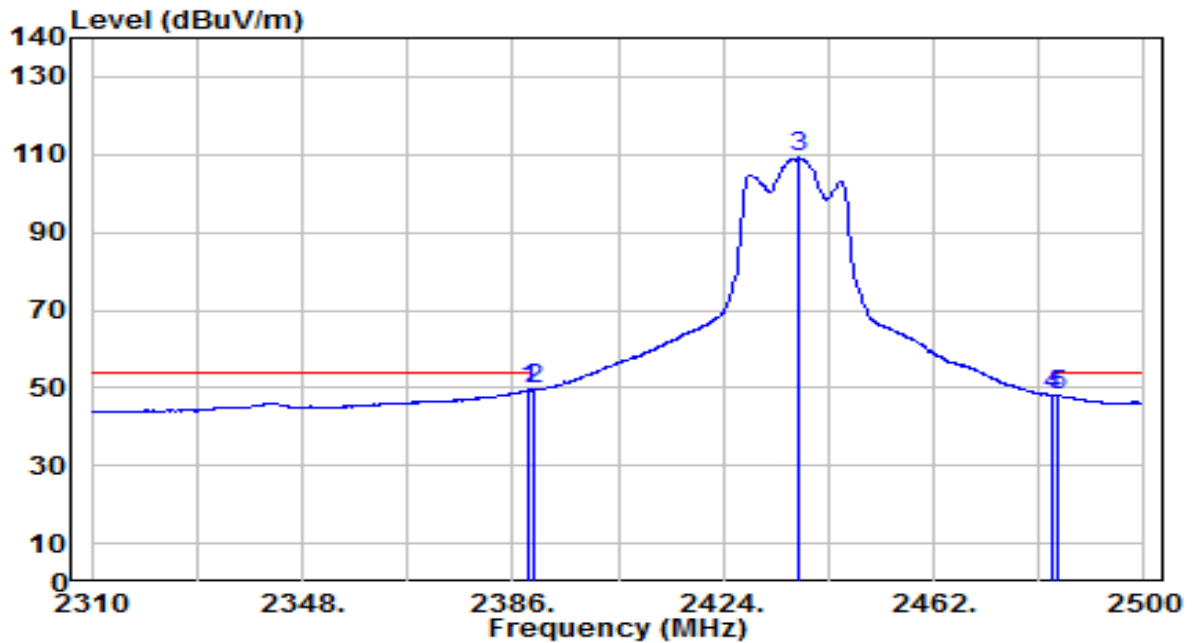


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.040	19.06	30.61	49.67	-4.33	54.00	100	210	Average
2	2390.000	18.79	30.61	49.41	-4.59	54.00	100	210	Average
3	2437.680	78.43	30.76	109.18	N/A	N/A	100	210	Average
4	2483.500	17.09	30.91	48.00	-6.00	54.00	100	210	Average
5	2484.610	17.27	30.92	48.19	-5.81	54.00	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

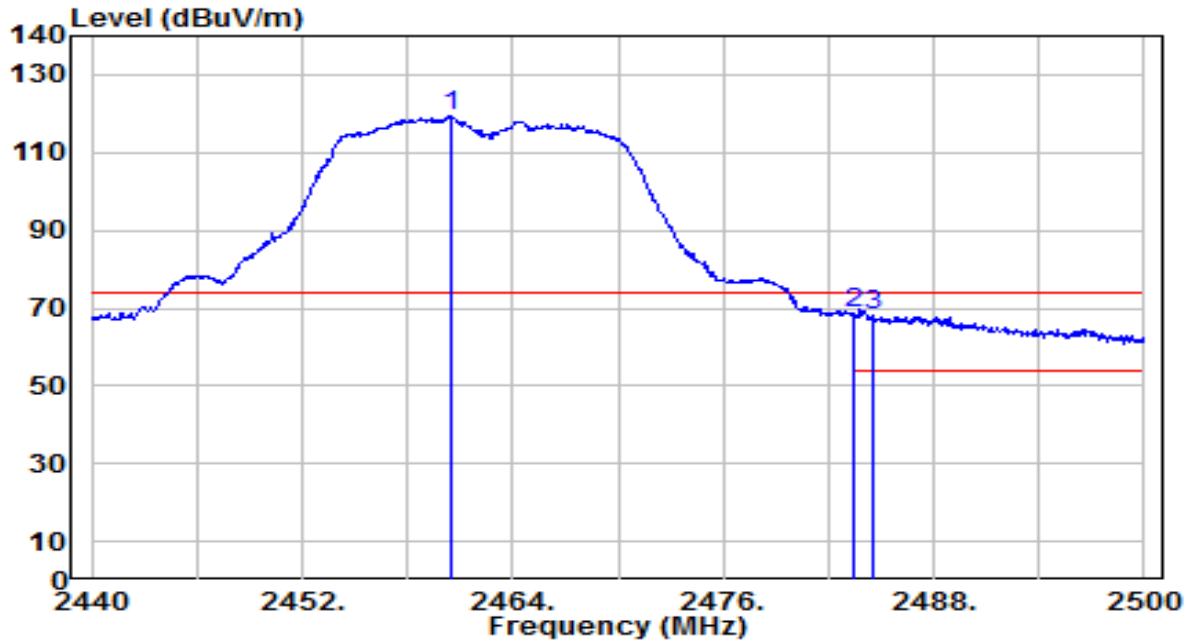


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.460	88.37	30.83	119.21	N/A	N/A	215	145	Peak
2	* 2483.500	37.93	30.91	68.85	-5.15	74.00	215	145	Peak
3	2484.580	37.04	30.92	67.96	-6.04	74.00	215	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

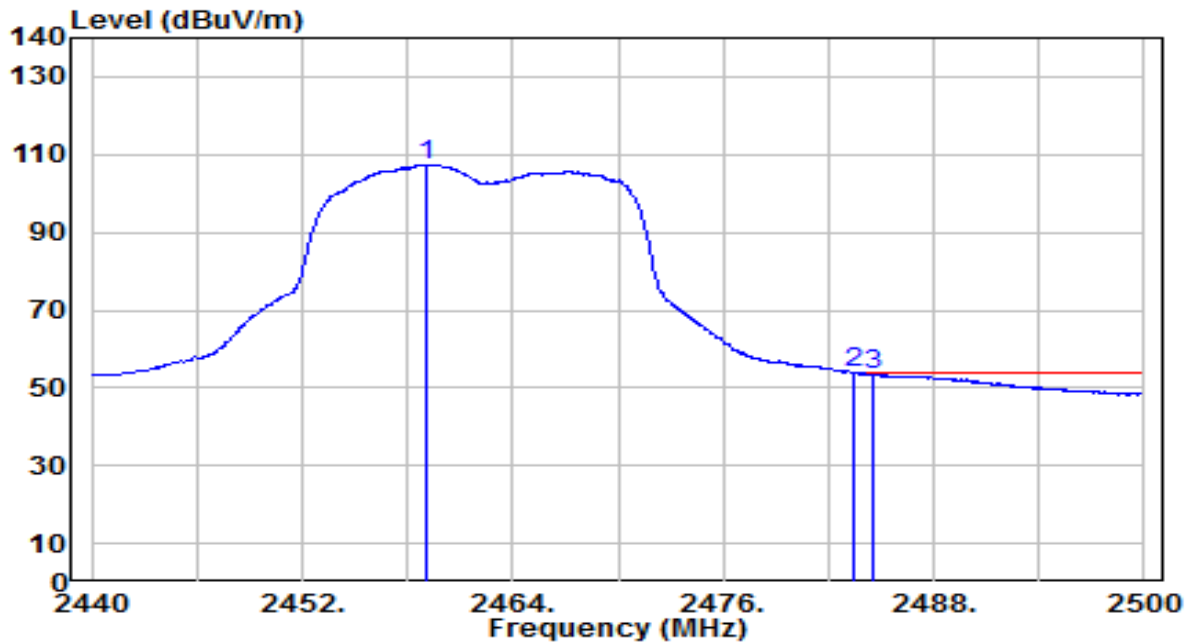


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.080	76.67	30.83	107.50	N/A	N/A	215	145	Average
2	* 2483.500	22.92	30.91	53.84	-0.16	54.00	215	145	Average
3	2484.520	22.47	30.92	53.39	-0.61	54.00	215	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

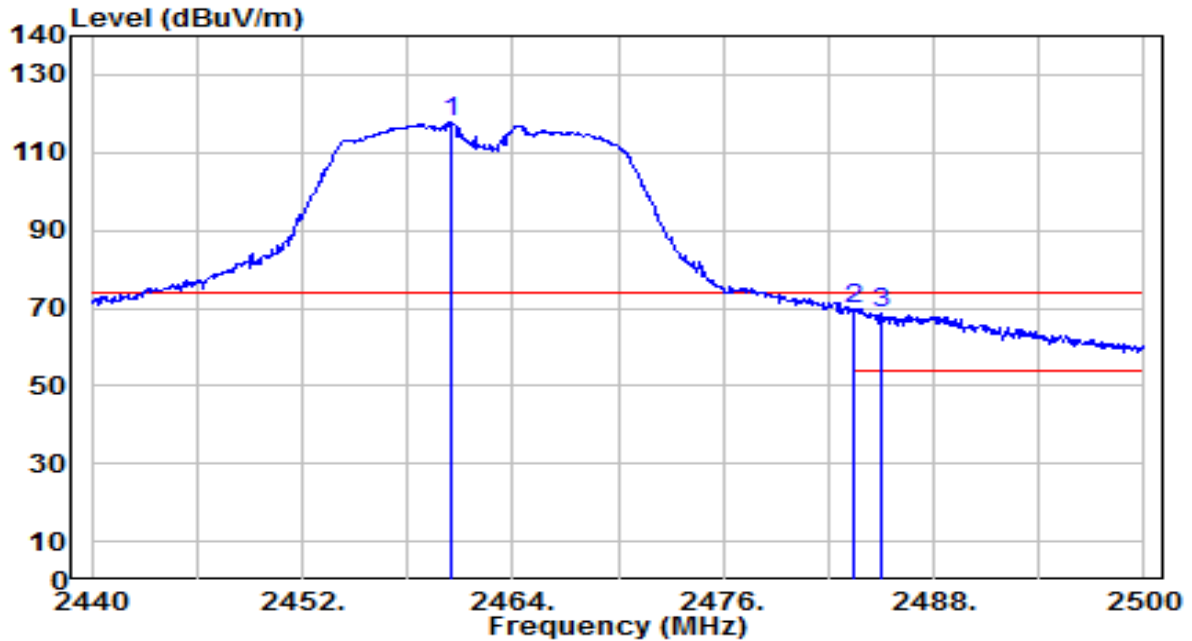


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.460	86.93	30.83	117.77	N/A	N/A	100	210	Peak
2	* 2483.500	38.61	30.91	69.52	-4.48	74.00	100	210	Peak
3	2485.060	38.02	30.92	68.94	-5.06	74.00	100	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

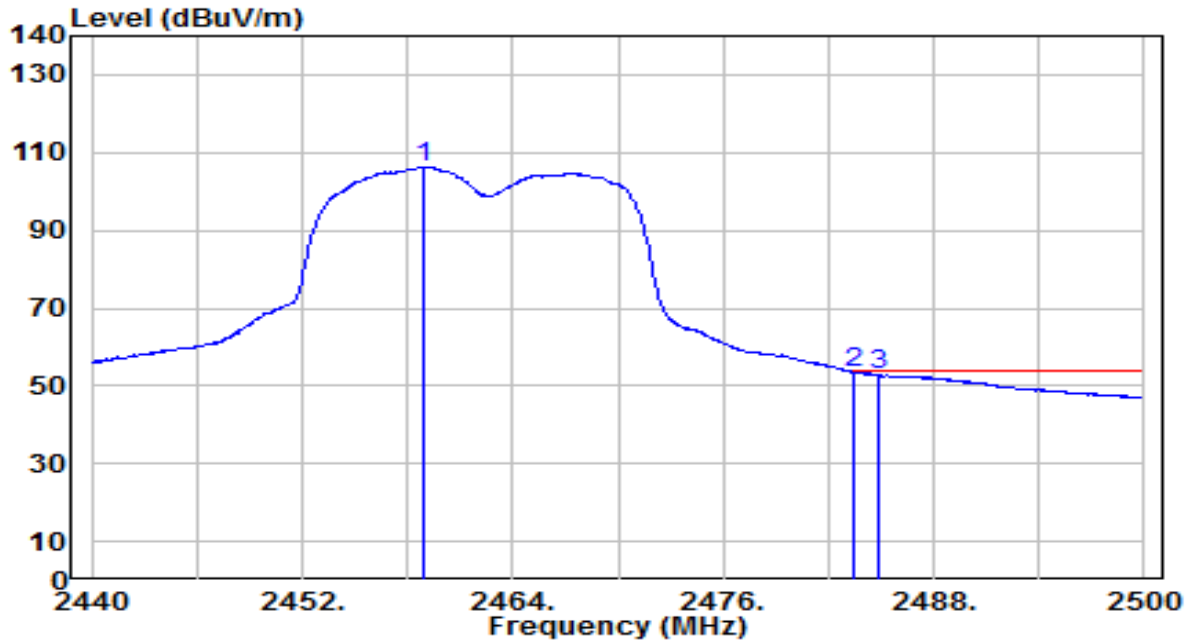


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.900	75.51	30.83	106.34	N/A	N/A	100	210	Average
2	* 2483.500	22.53	30.91	53.45	-0.55	54.00	100	210	Average
3	2484.820	22.08	30.92	53.00	-1.00	54.00	100	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

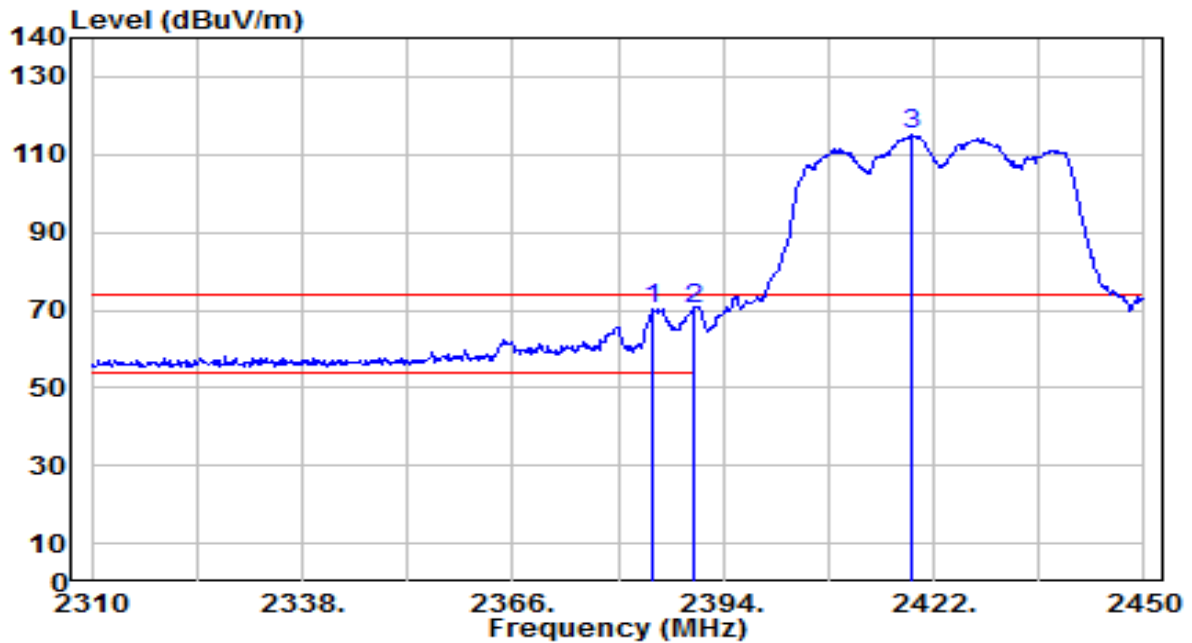


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.760	39.62	30.61	70.22	-3.78	74.00	245	150	Peak
2	* 2390.000	39.65	30.61	70.27	-3.73	74.00	245	150	Peak
3	2419.060	84.26	30.69	114.95	N/A	N/A	245	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

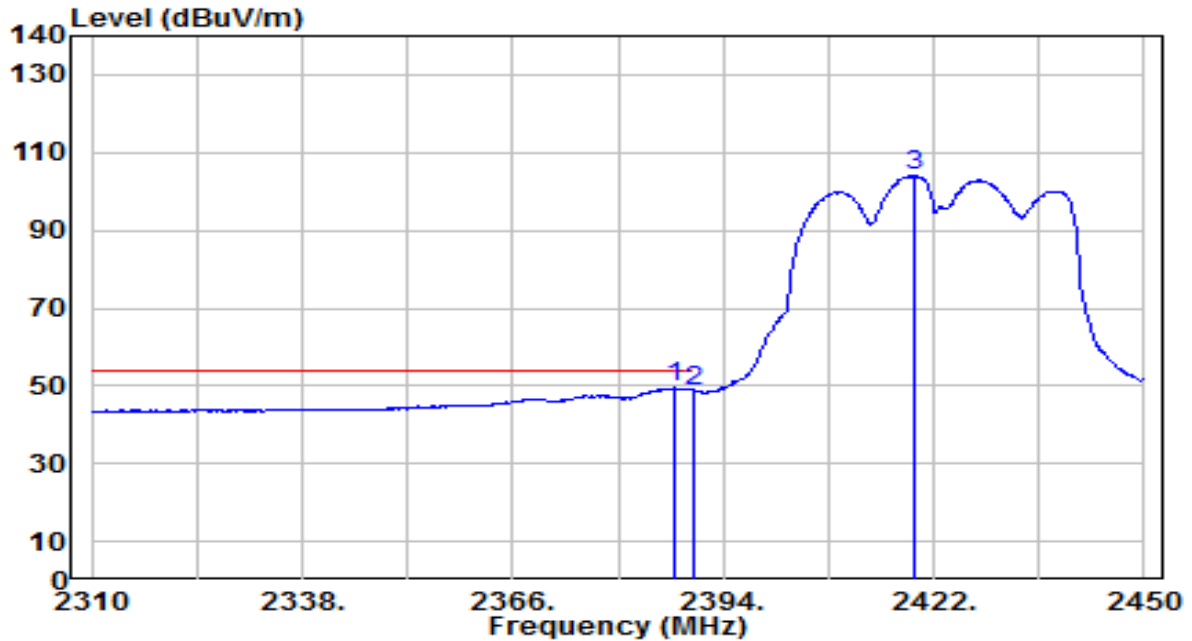


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.700	18.79	30.61	49.40	-4.60	54.00	245	150	Average
2		2390.000	18.11	30.61	48.73	-5.27	54.00	245	150	Average
3		2419.340	73.37	30.69	104.06	N/A	N/A	245	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

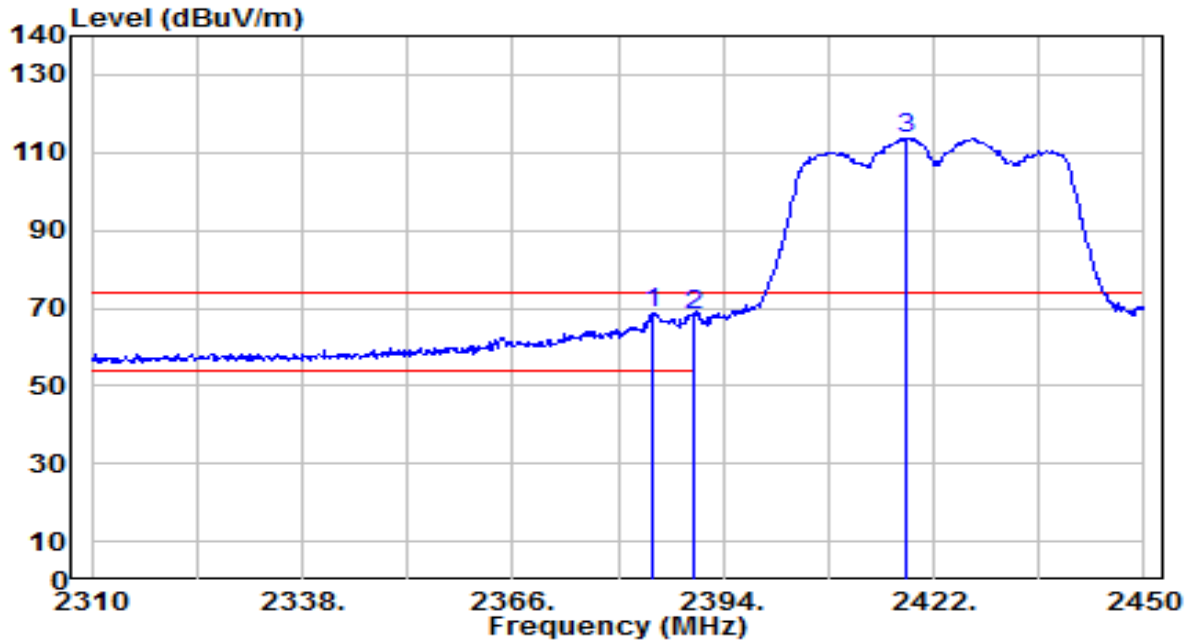


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.760	38.32	30.61	68.92	-5.08	74.00	105	210	Peak
2	2390.000	37.79	30.61	68.41	-5.59	74.00	105	210	Peak
3	2418.500	83.06	30.69	113.75	N/A	N/A	105	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

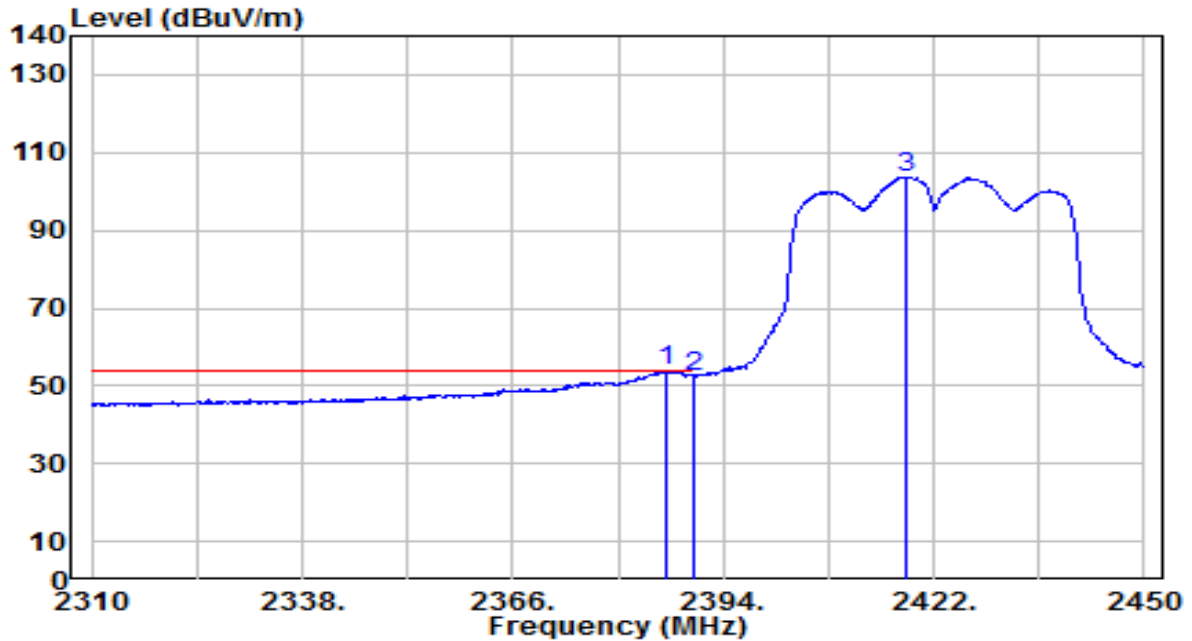


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2386.580	23.25	30.61	53.85	-0.15	54.00	105	210	Average
2	2390.000	21.88	30.61	52.49	-1.51	54.00	105	210	Average
3	2418.360	73.09	30.69	103.78	N/A	N/A	105	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

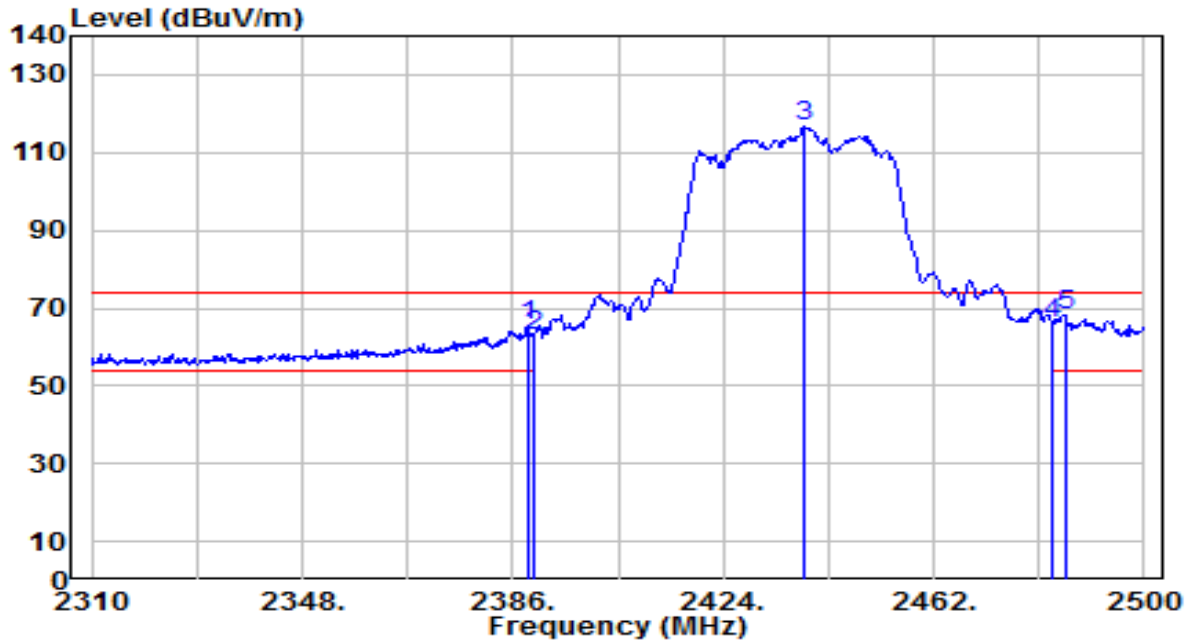


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	35.04	30.61	65.65	-8.35	74.00	210	140	Peak
2	2390.000	32.19	30.61	62.80	-11.20	74.00	210	140	Peak
3	2438.440	86.21	30.76	116.97	N/A	N/A	210	140	Peak
4	2483.500	35.35	30.91	66.26	-7.74	74.00	210	140	Peak
5	* 2485.750	37.42	30.92	68.34	-5.66	74.00	210	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

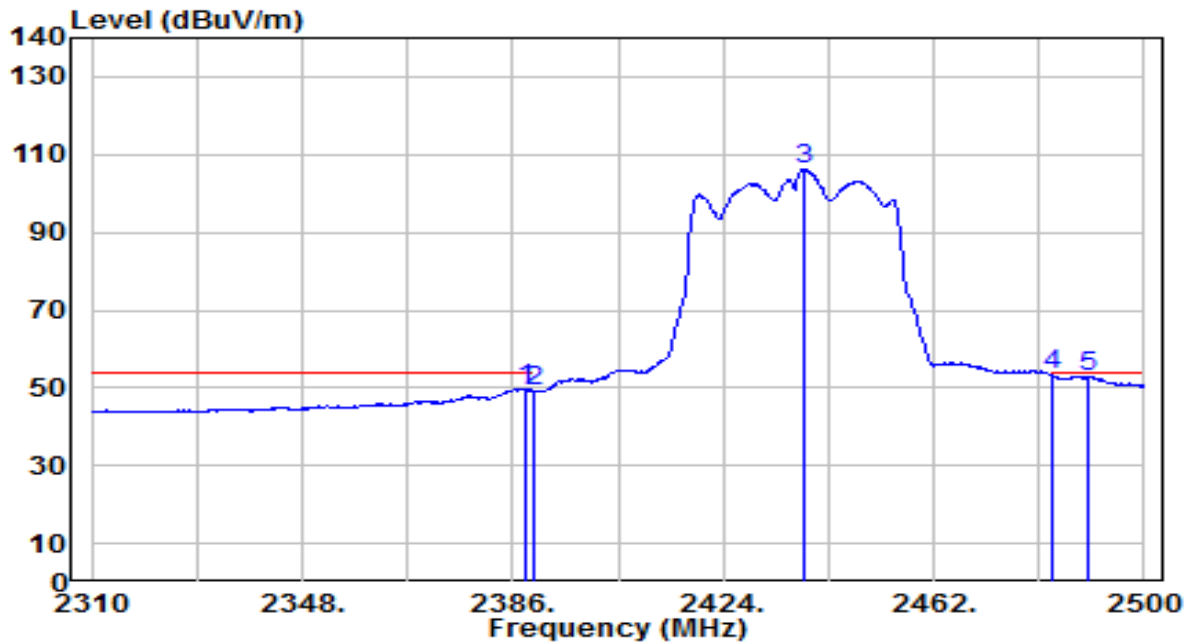


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	19.16	30.61	49.77	-4.23	54.00	210	140	Average
2	2390.000	18.64	30.61	49.25	-4.75	54.00	210	140	Average
3	2438.440	75.50	30.76	106.26	N/A	N/A	210	140	Average
4	* 2483.500	22.19	30.91	53.10	-0.90	54.00	210	140	Average
5	2489.930	21.92	30.94	52.85	-1.15	54.00	210	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

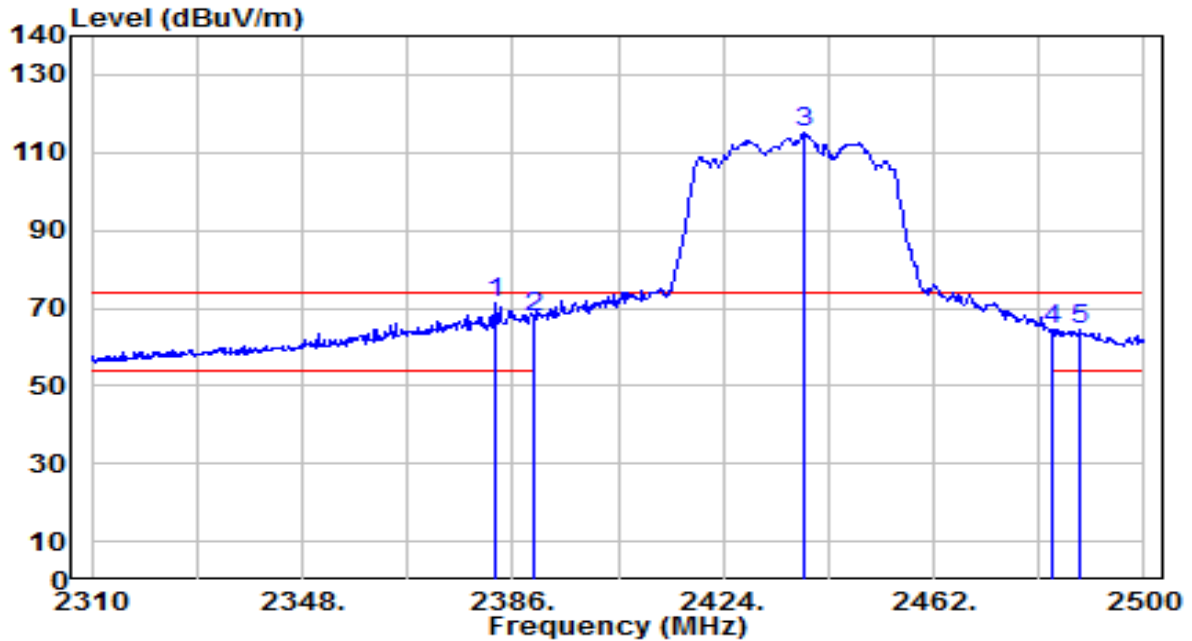


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2382.960	40.83	30.60	71.43	-2.57	74.00	100	210	Peak
2	2390.000	37.04	30.61	67.66	-6.34	74.00	100	210	Peak
3	2438.440	84.40	30.76	115.16	N/A	N/A	100	210	Peak
4	2483.500	33.39	30.91	64.31	-9.69	74.00	100	210	Peak
5	2488.410	33.62	30.93	64.55	-9.45	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

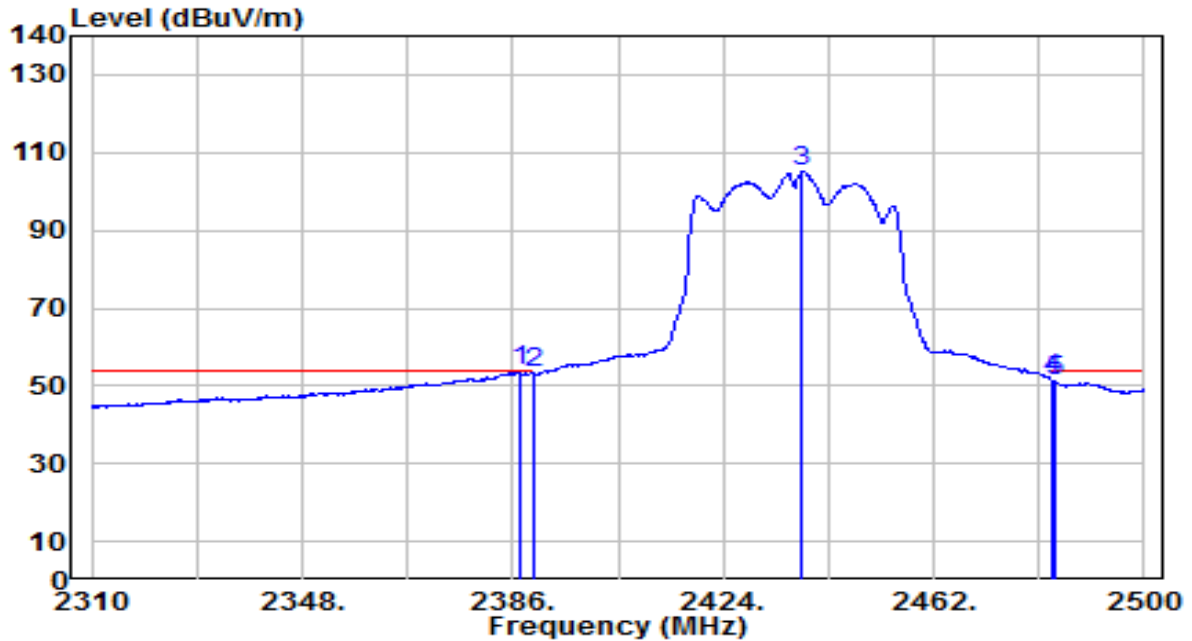


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.330	23.28	30.61	53.89	-0.11	54.00	100	210	Average
2	2390.000	22.54	30.61	53.16	-0.84	54.00	100	210	Average
3	2438.250	74.41	30.76	105.17	N/A	N/A	100	210	Average
4	2483.500	20.62	30.91	51.53	-2.47	54.00	100	210	Average
5	2484.040	20.27	30.92	51.19	-2.81	54.00	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

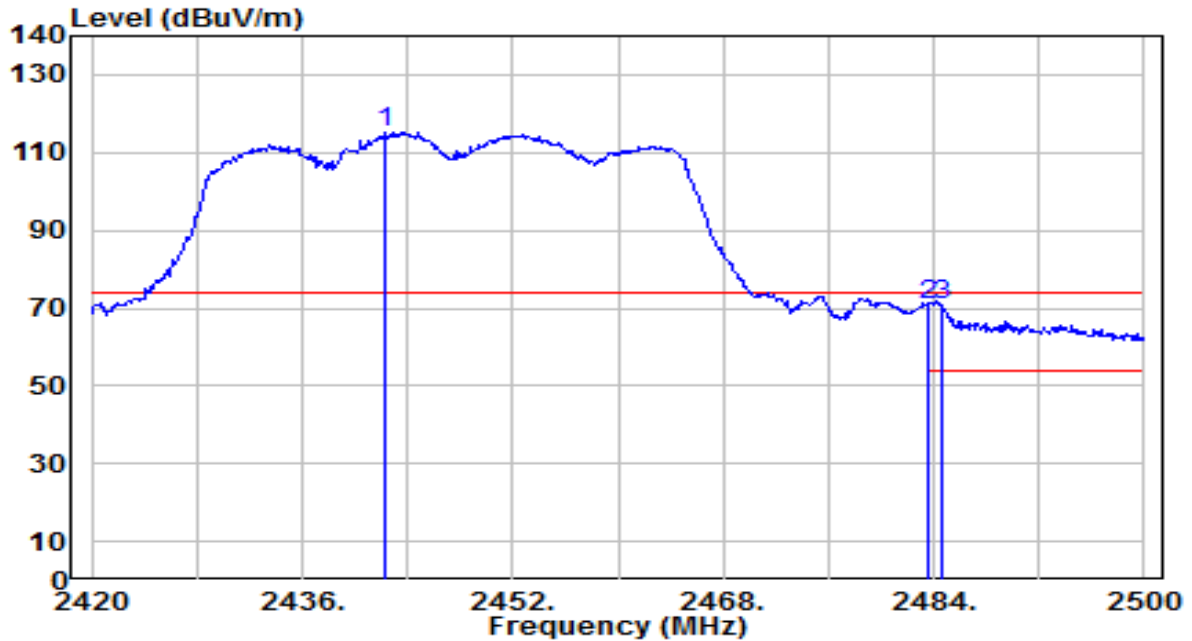


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2442.320	84.29	30.77	115.06	N/A	N/A	215	140	Peak
2	2483.500	39.93	30.91	70.84	-3.16	74.00	215	140	Peak
3	* 2484.560	40.02	30.92	70.93	-3.07	74.00	215	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

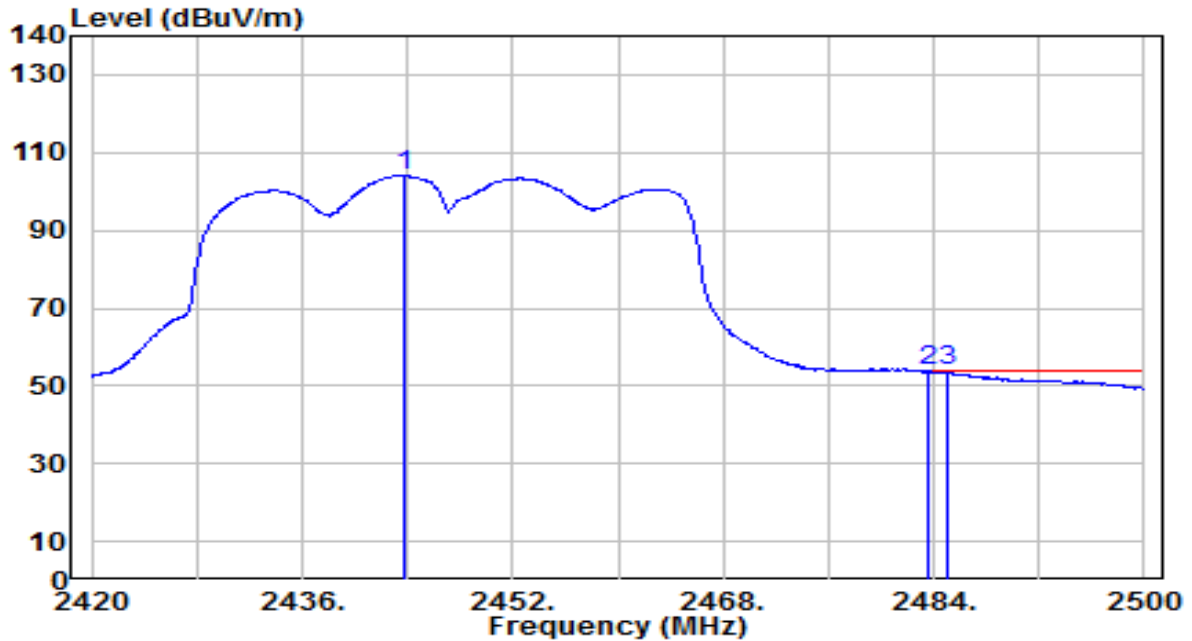


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.680	73.42	30.78	104.19	N/A	N/A	215	140	Average
2	* 2483.500	22.95	30.91	53.87	-0.13	54.00	215	140	Average
3	2485.040	22.74	30.92	53.66	-0.34	54.00	215	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

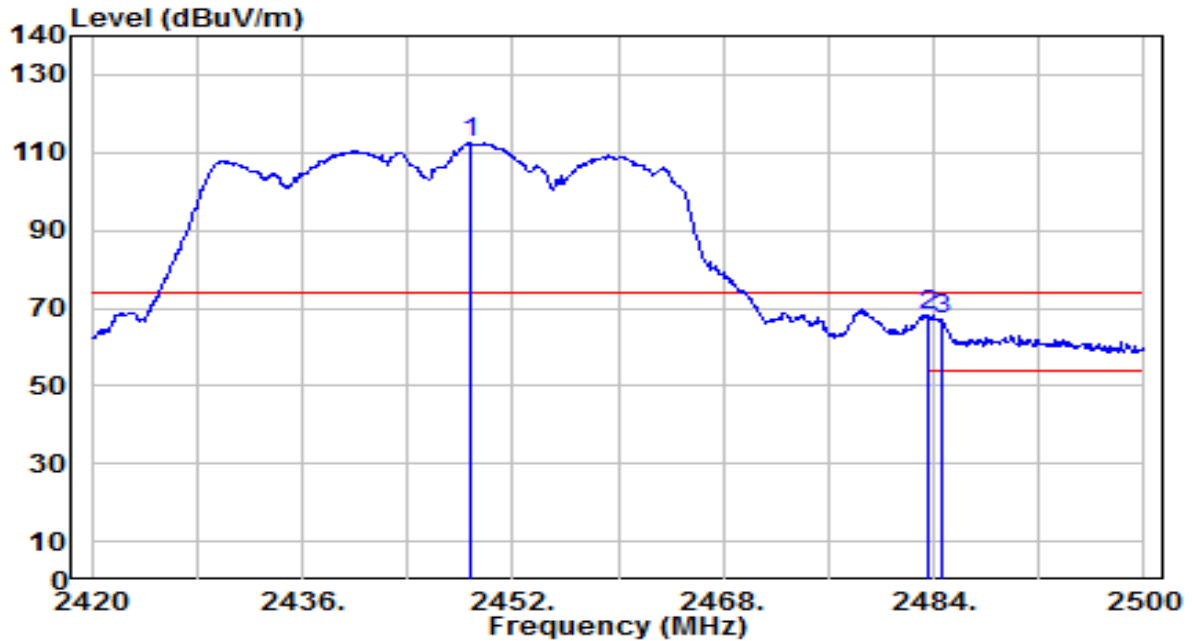


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.720	81.53	30.79	112.33	N/A	N/A	100	170	Peak
2	* 2483.500	37.04	30.91	67.96	-6.04	74.00	100	170	Peak
3	2484.640	36.36	30.92	67.27	-6.73	74.00	100	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

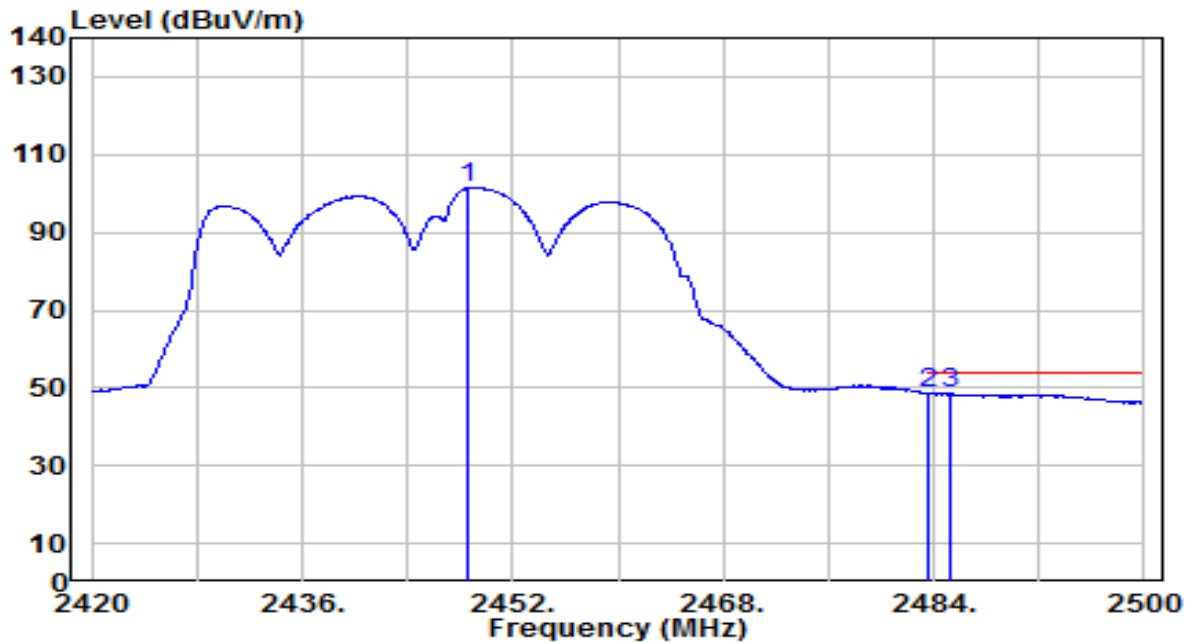


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.640	70.80	30.79	101.59	N/A	N/A	100	170	Average
2	2483.500	17.68	30.91	48.59	-5.41	54.00	100	170	Average
3	* 2485.200	17.72	30.92	48.64	-5.36	54.00	100	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

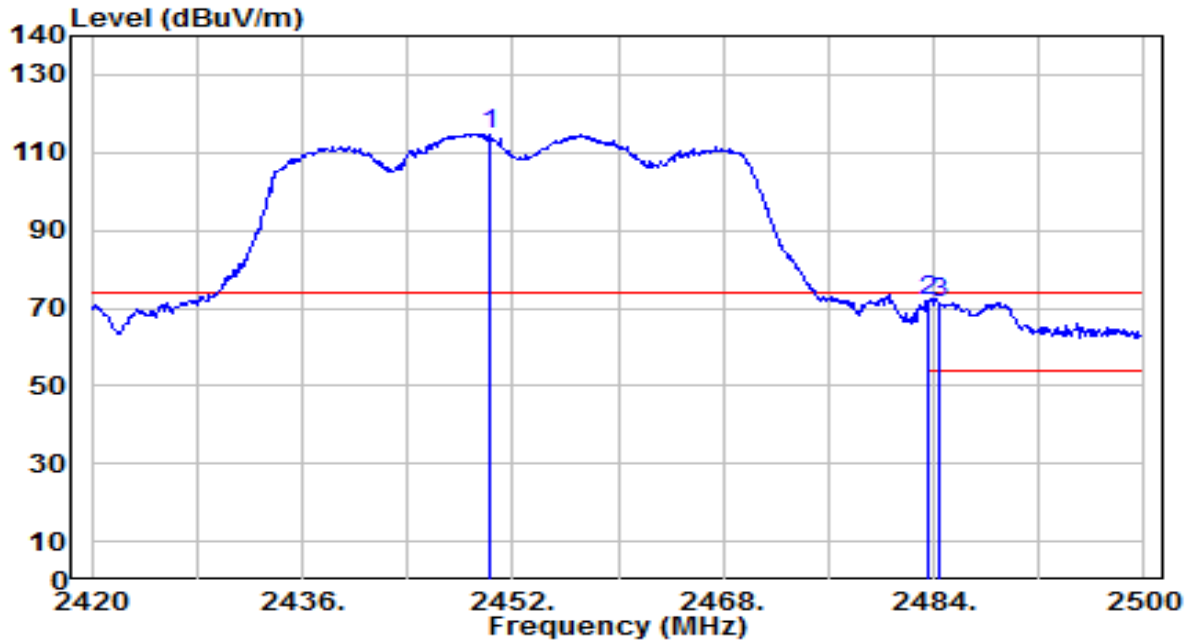


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.240	84.10	30.80	114.90	N/A	N/A	215	140	Peak
2	* 2483.500	40.79	30.91	71.71	-2.29	74.00	215	140	Peak
3	2484.480	40.37	30.92	71.29	-2.71	74.00	215	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

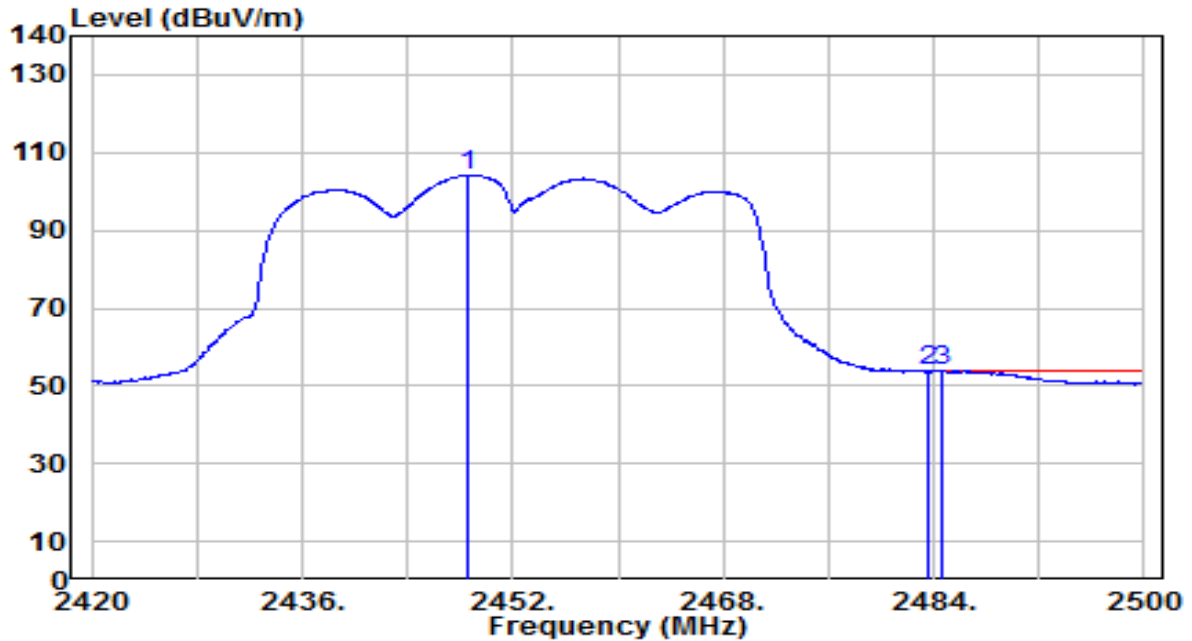


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.640	73.37	30.79	104.16	N/A	N/A	215	140	Average
2	2483.500	22.73	30.91	53.64	-0.36	54.00	215	140	Average
3	* 2484.560	23.01	30.92	53.93	-0.07	54.00	215	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

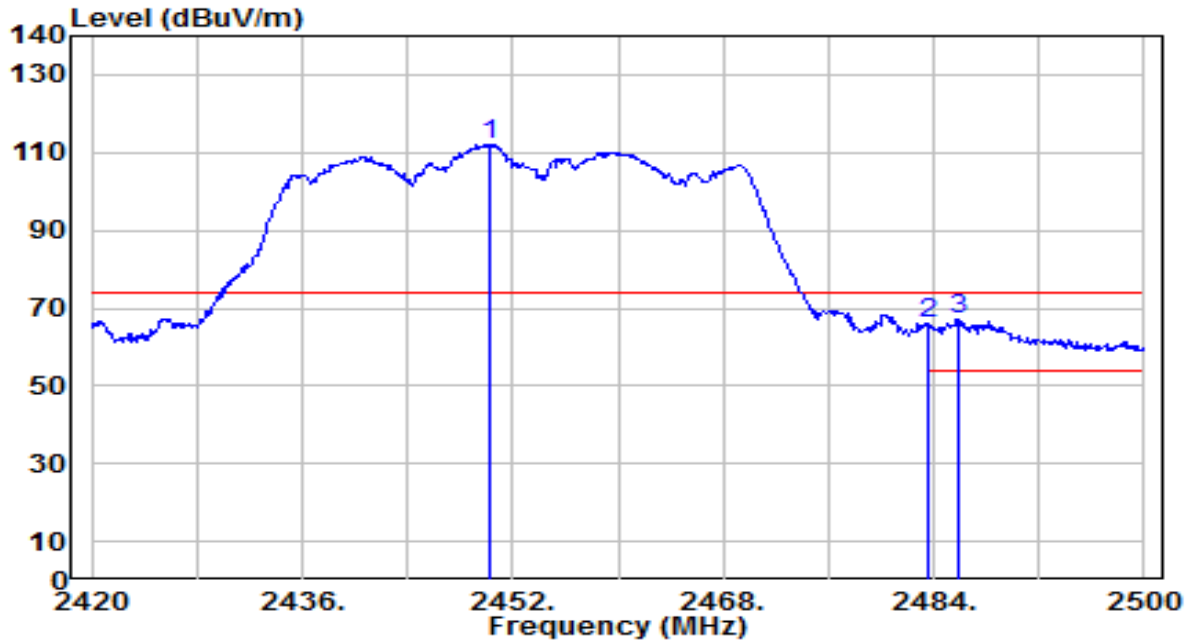


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.320	81.26	30.80	112.06	N/A	N/A	100	140	Peak
2	2483.500	34.93	30.91	65.84	-8.16	74.00	100	140	Peak
3	* 2485.840	36.38	30.92	67.31	-6.69	74.00	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

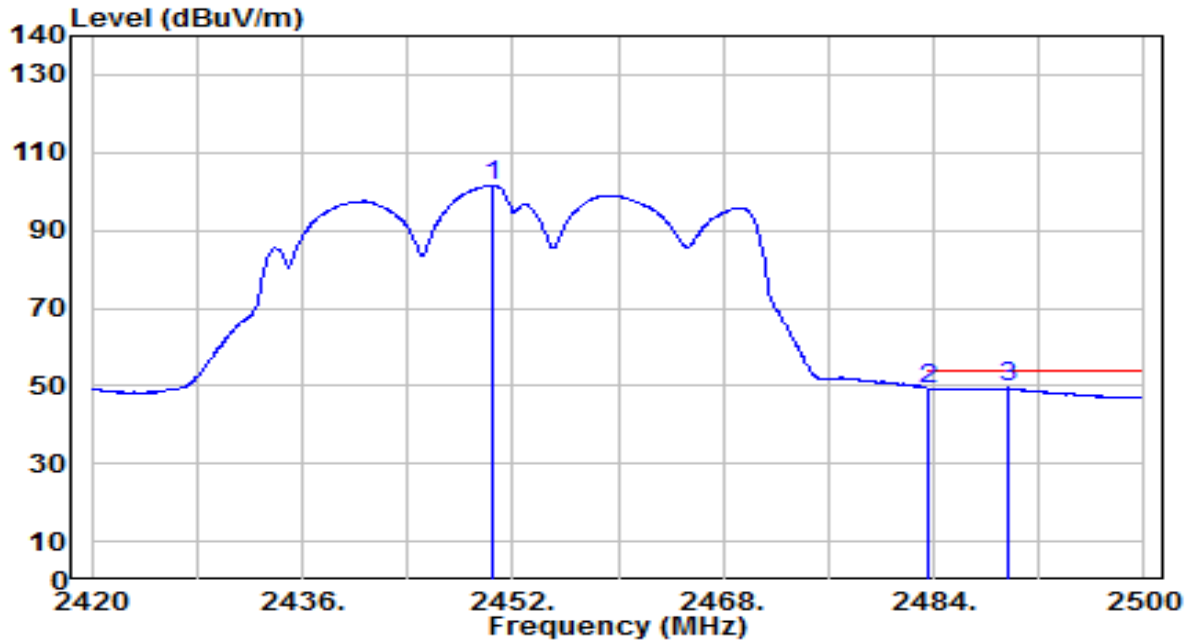


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.480	70.63	30.80	101.43	N/A	N/A	100	140	Average
2	2483.500	18.46	30.91	49.37	-4.63	54.00	100	140	Average
3	* 2489.680	18.49	30.93	49.42	-4.58	54.00	100	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

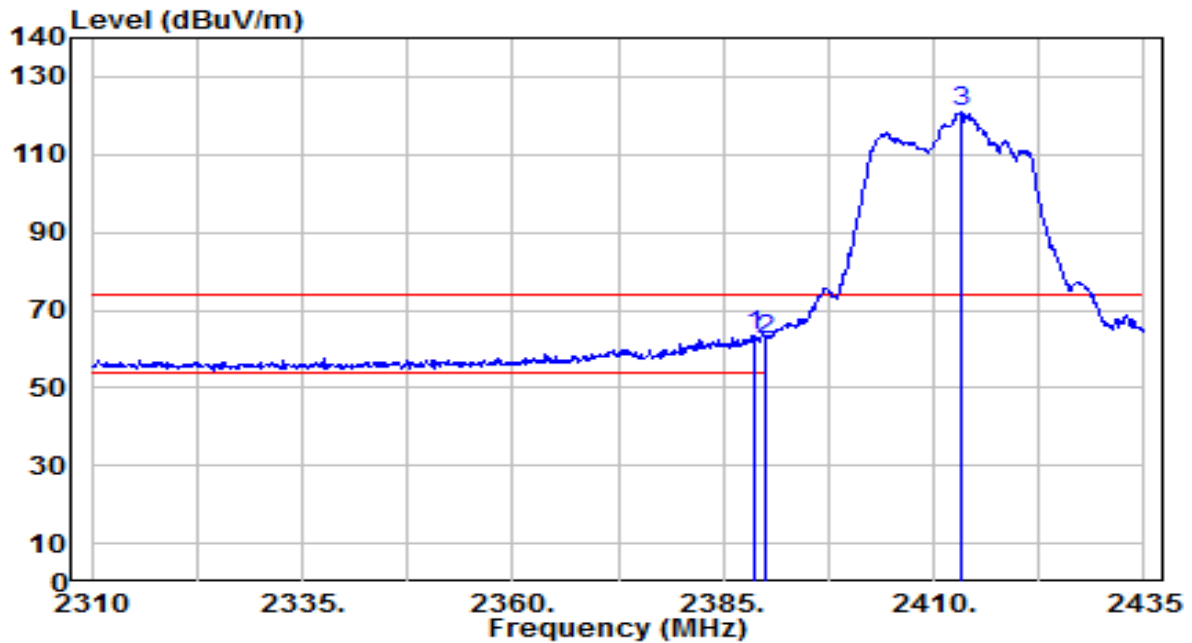


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.750	32.72	30.61	63.33	-10.67	74.00	245	140	Peak
2	2390.000	31.79	30.61	62.40	-11.60	74.00	245	140	Peak
3	2413.250	90.06	30.67	120.73	N/A	N/A	245	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

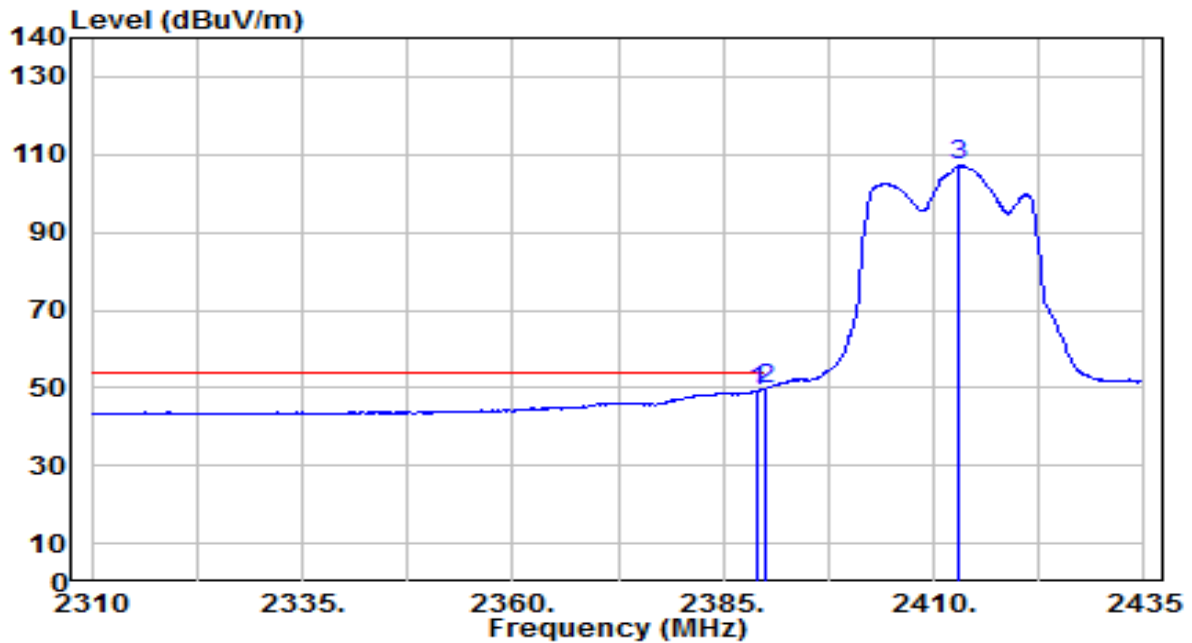


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	18.69	30.61	49.31	-4.69	54.00	245	140	Average
2	* 2390.000	19.22	30.61	49.84	-4.16	54.00	245	140	Average
3	2413.000	76.38	30.67	107.06	N/A	N/A	245	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

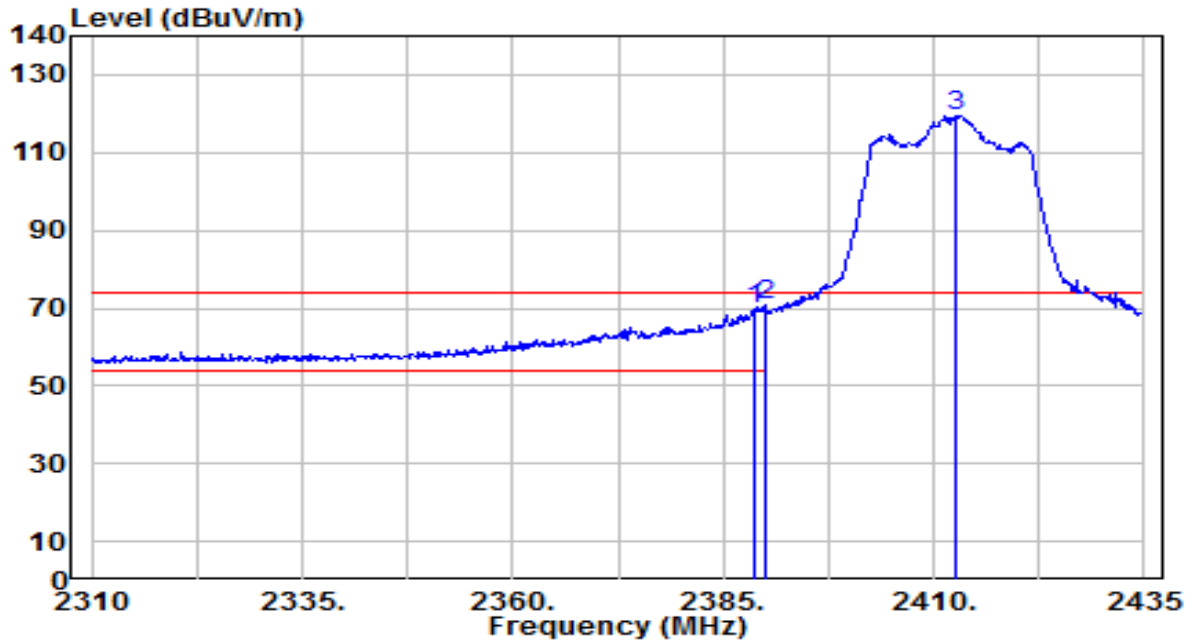


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.625	39.10	30.61	69.72	-4.28	74.00	100	205	Peak
2	* 2390.000	40.13	30.61	70.74	-3.26	74.00	100	205	Peak
3	2412.625	88.68	30.67	119.35	N/A	N/A	100	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

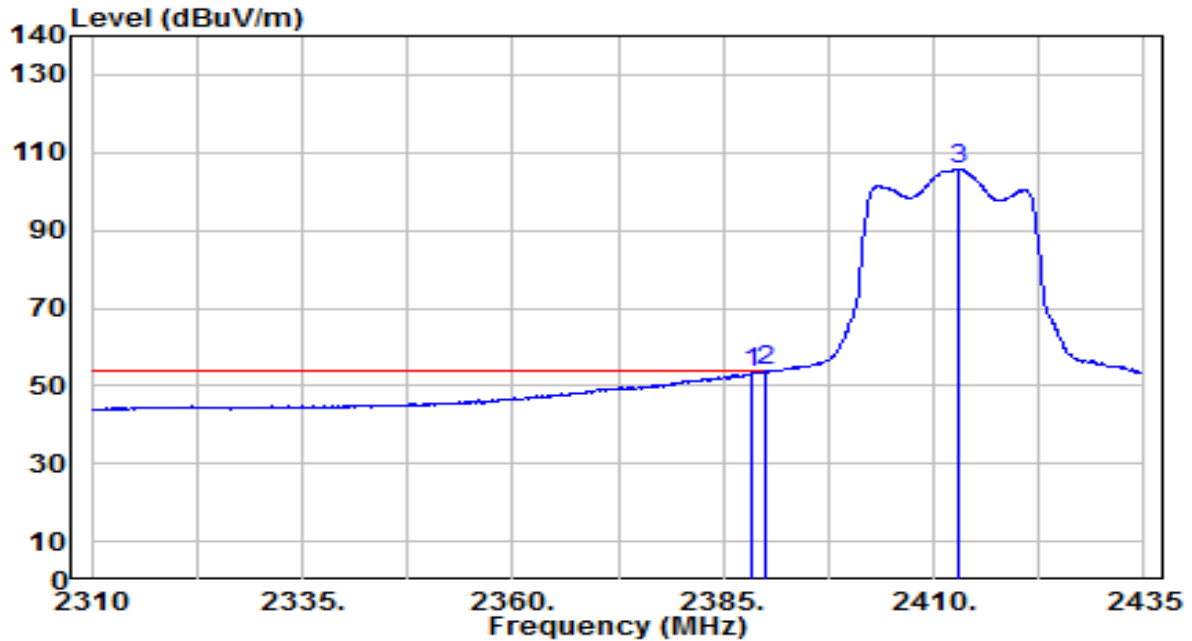


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.250	23.01	30.61	53.62	-0.38	54.00	100	205	Average
2	* 2390.000	23.26	30.61	53.87	-0.13	54.00	100	205	Average
3	2412.875	75.24	30.67	105.91	N/A	N/A	100	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

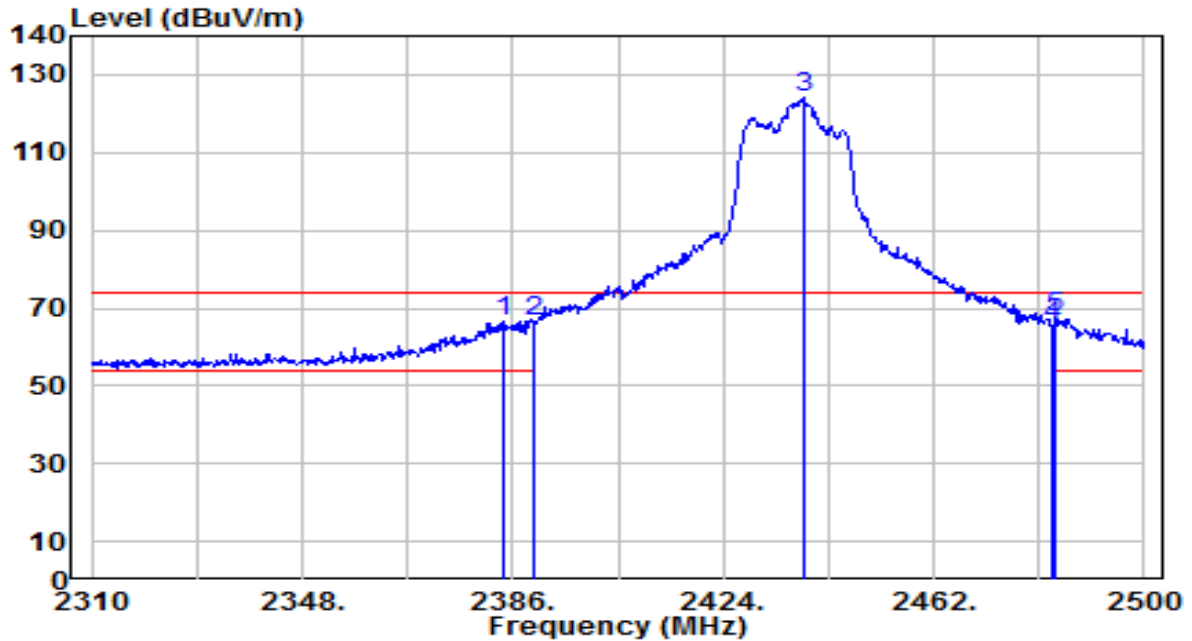


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	36.15	30.61	66.76	-7.24	74.00	215	140	Peak
2	2390.000	36.12	30.61	66.73	-7.27	74.00	215	140	Peak
3	2438.440	93.37	30.76	124.13	N/A	N/A	215	140	Peak
4	2483.500	34.84	30.91	65.75	-8.25	74.00	215	140	Peak
5	* 2484.040	36.51	30.92	67.43	-6.57	74.00	215	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

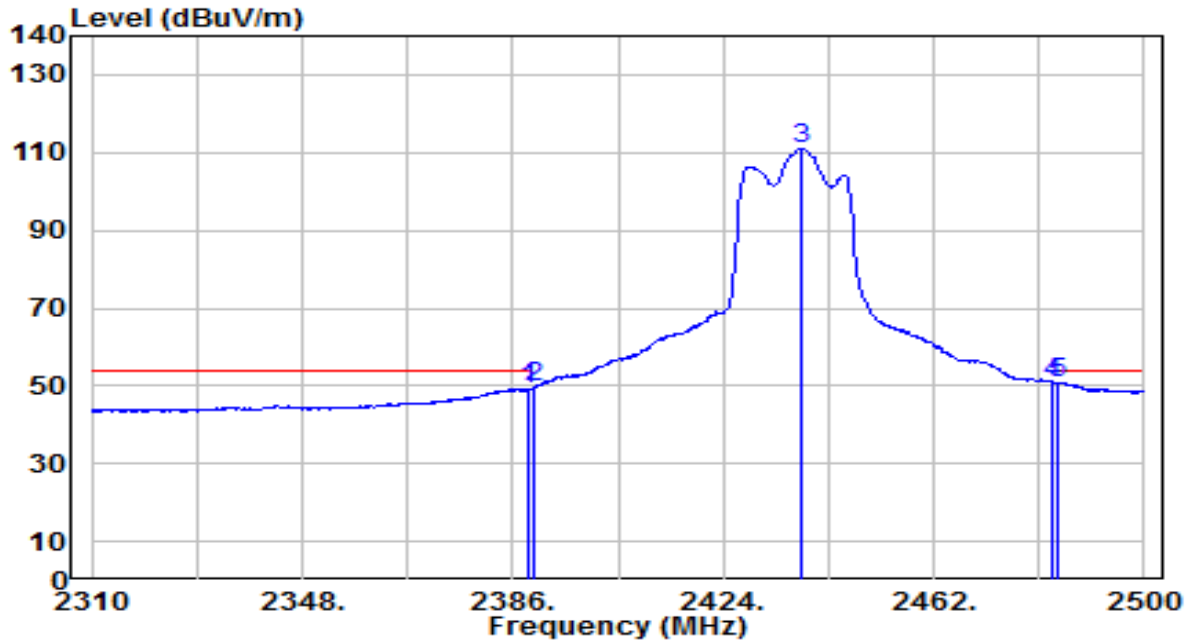


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	18.54	30.61	49.15	-4.85	54.00	215	140	Average
2	2390.000	19.11	30.61	49.72	-4.28	54.00	215	140	Average
3	2438.250	80.36	30.76	111.12	N/A	N/A	215	140	Average
4	2483.500	19.84	30.91	50.75	-3.25	54.00	215	140	Average
5	* 2484.230	20.01	30.92	50.93	-3.07	54.00	215	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

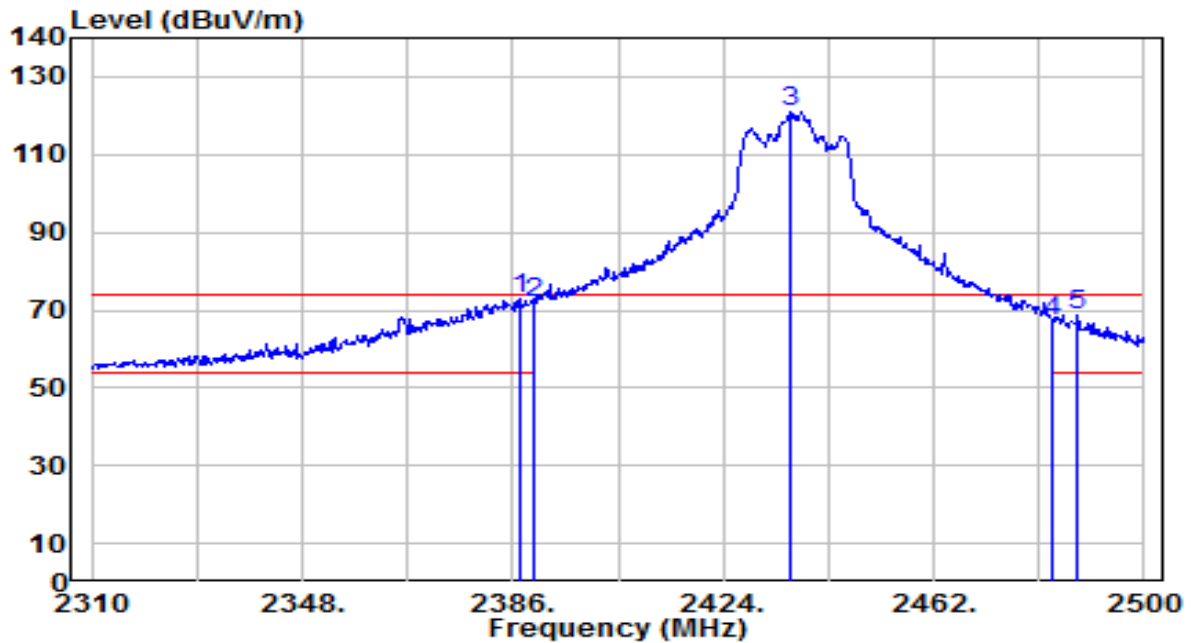


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.140	42.20	30.61	72.81	-1.19	74.00	100	210	Peak
2	2390.000	41.38	30.61	72.00	-2.00	74.00	100	210	Peak
3	2436.160	90.38	30.75	121.13	N/A	N/A	100	210	Peak
4	2483.500	36.00	30.91	66.91	-7.09	74.00	100	210	Peak
5	2487.840	37.75	30.93	68.68	-5.32	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

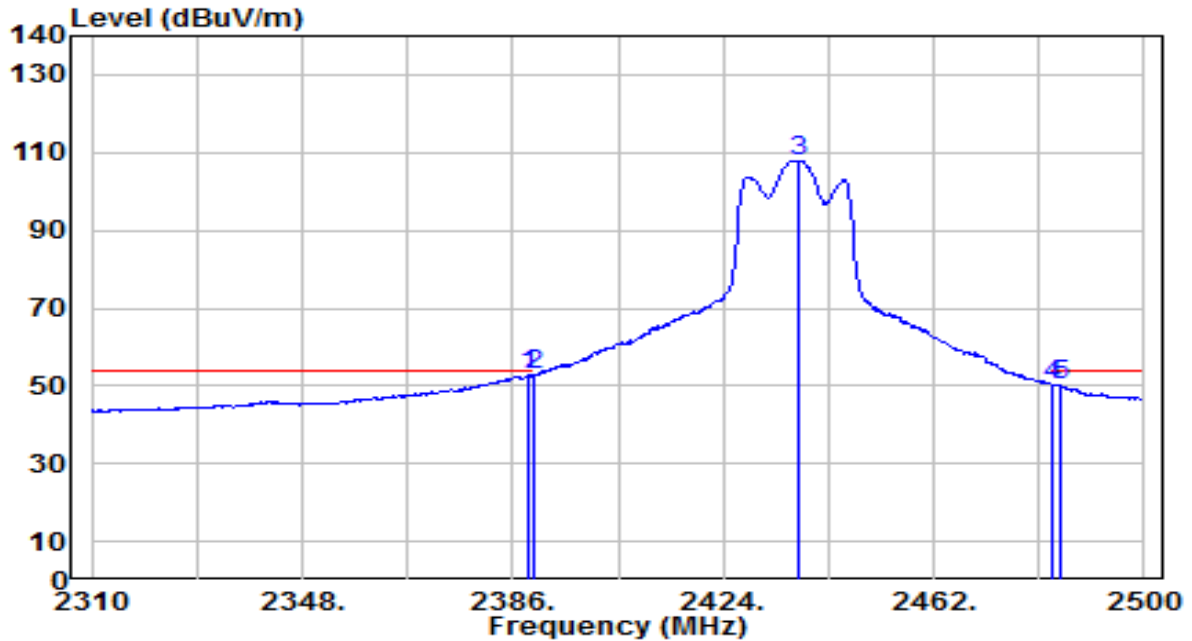


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.660	22.33	30.61	52.94	-1.06	54.00	100	210	Average
2	2390.000	22.28	30.61	52.89	-1.11	54.00	100	210	Average
3	2437.680	77.28	30.76	108.03	N/A	N/A	100	210	Average
4	2483.500	19.35	30.91	50.26	-3.74	54.00	100	210	Average
5	2484.800	19.51	30.92	50.43	-3.57	54.00	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

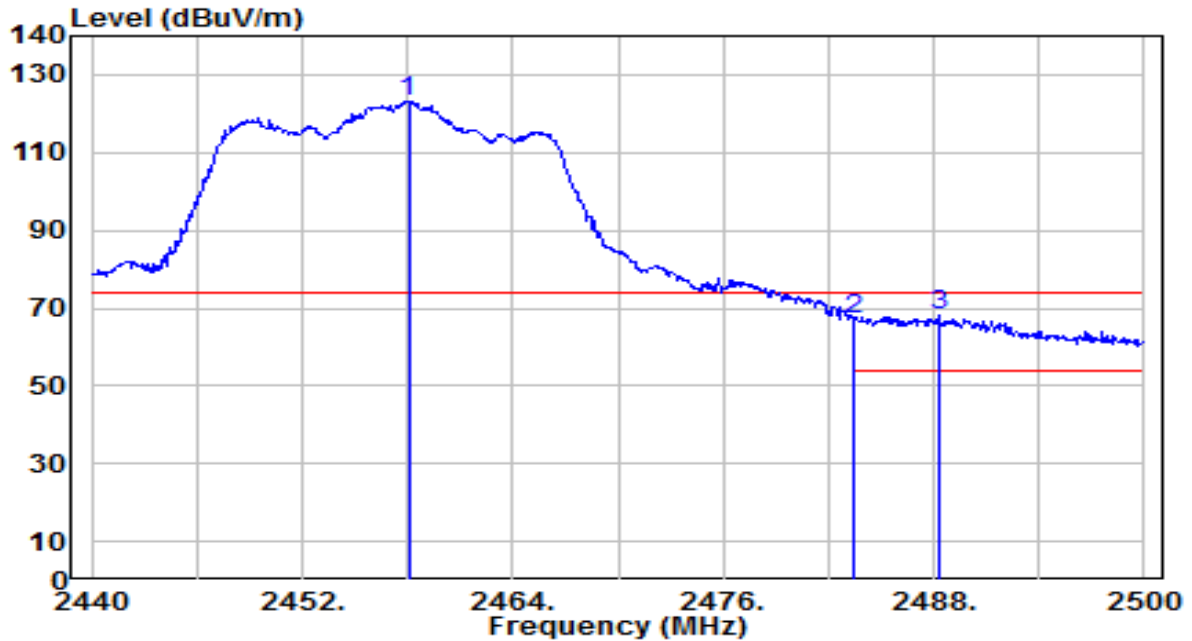


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.060	92.26	30.83	123.09	N/A	N/A	210	140	Peak
2	2483.500	36.16	30.91	67.08	-6.92	74.00	210	140	Peak
3	* 2488.240	37.23	30.93	68.16	-5.84	74.00	210	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

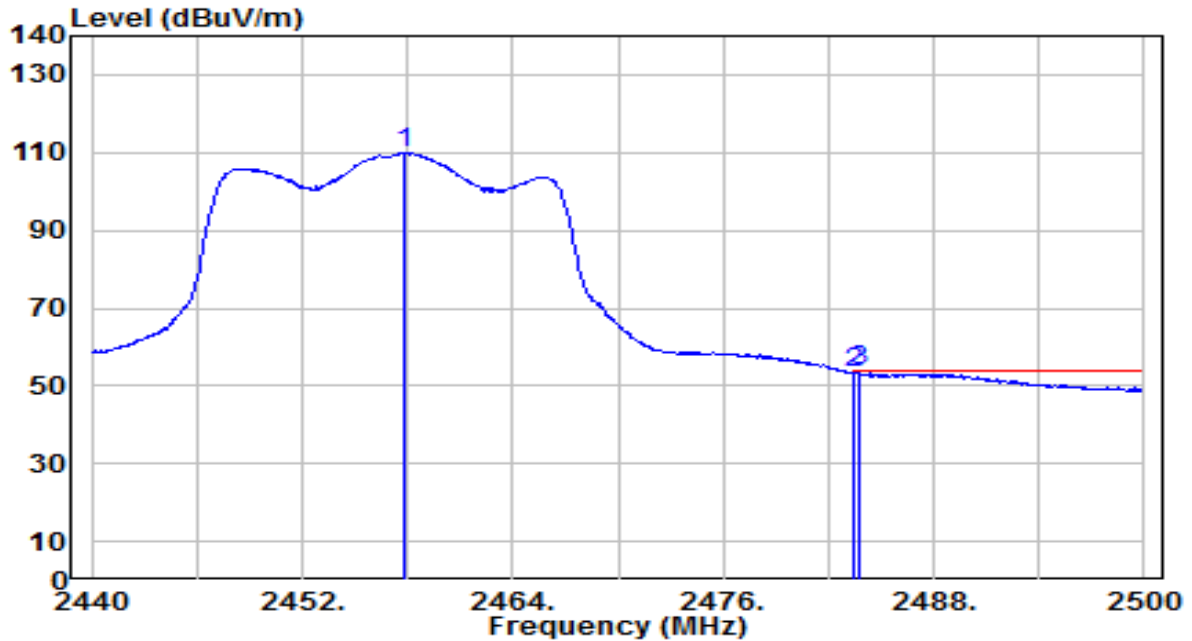


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.820	79.08	30.83	109.90	N/A	N/A	210	140	Average
2	2483.500	22.51	30.91	53.43	-0.57	54.00	210	140	Average
3	* 2483.800	22.97	30.91	53.89	-0.11	54.00	210	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

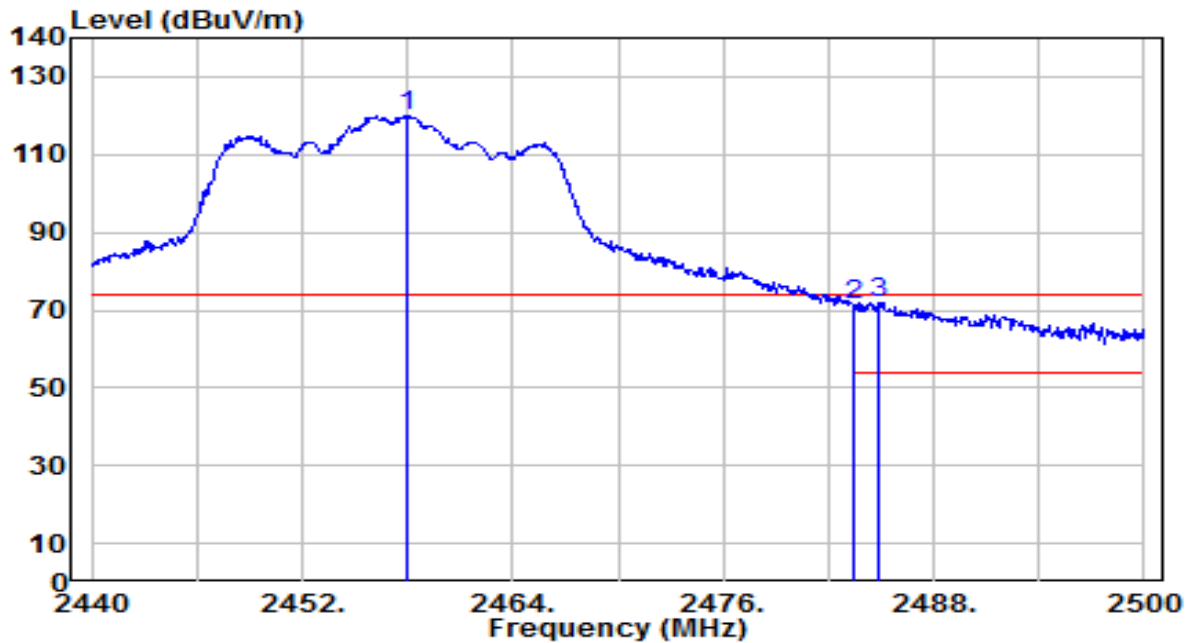


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.000	89.13	30.83	119.96	N/A	N/A	100	210	Peak
2	2483.500	40.24	30.91	71.15	-2.85	74.00	100	210	Peak
3	* 2484.880	41.05	30.92	71.96	-2.04	74.00	100	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

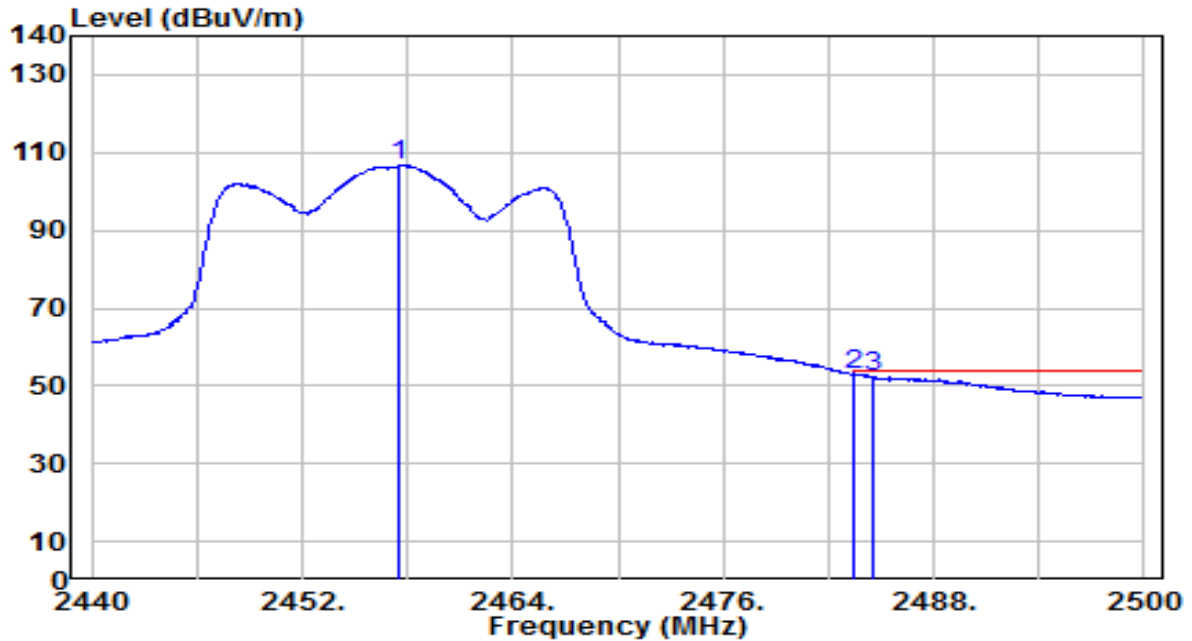


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.520	75.83	30.82	106.66	N/A	N/A	100	210	Average
2	* 2483.500	22.14	30.91	53.06	-0.94	54.00	100	210	Average
3	2484.580	21.18	30.92	52.09	-1.91	54.00	100	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

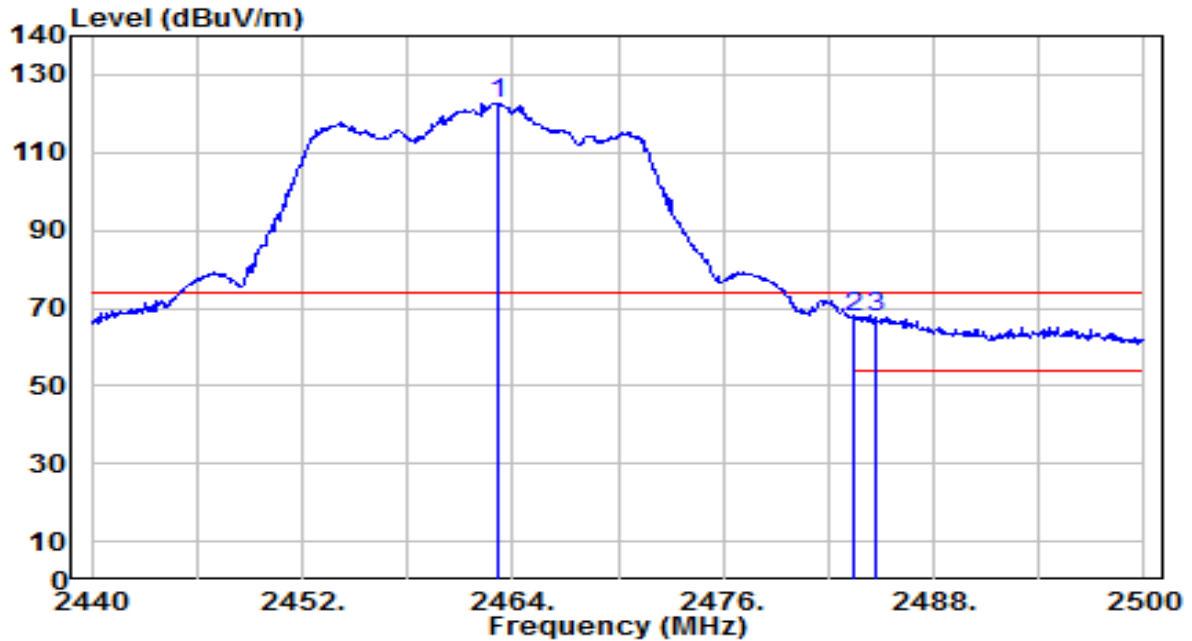


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.220	91.71	30.84	122.56	N/A	N/A	235	135	Peak
2	2483.500	36.85	30.91	67.76	-6.24	74.00	235	135	Peak
3	* 2484.640	36.87	30.92	67.79	-6.21	74.00	235	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

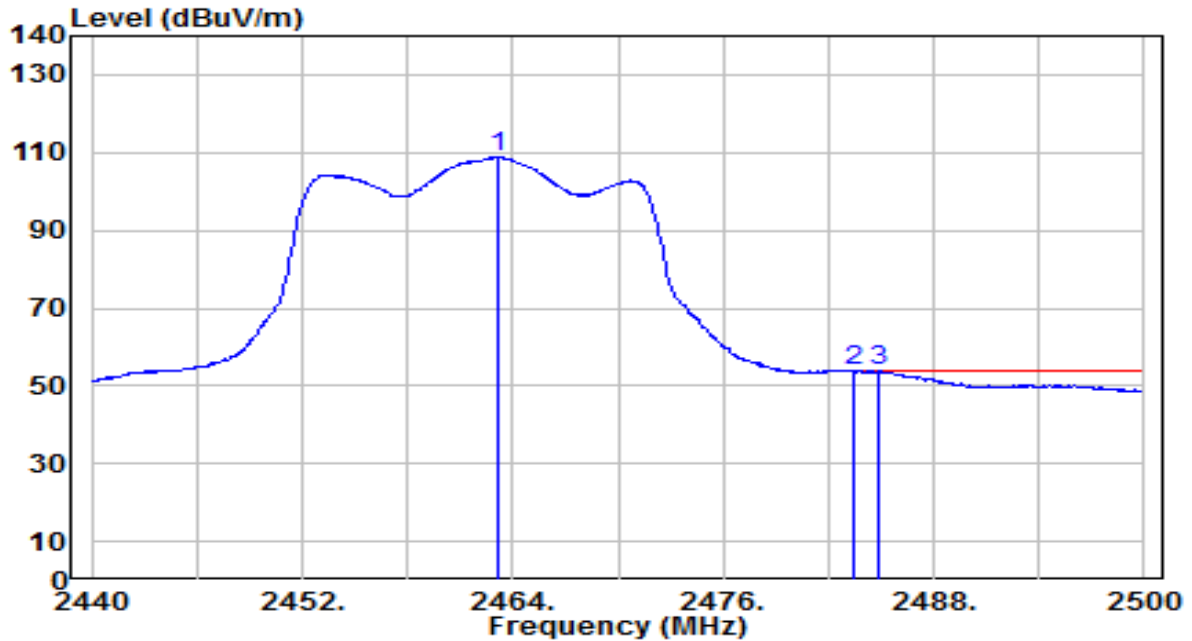


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.100	78.00	30.84	108.84	N/A	N/A	235	135	Average
2	* 2483.500	22.97	30.91	53.88	-0.12	54.00	235	135	Average
3	2484.880	22.80	30.92	53.71	-0.29	54.00	235	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

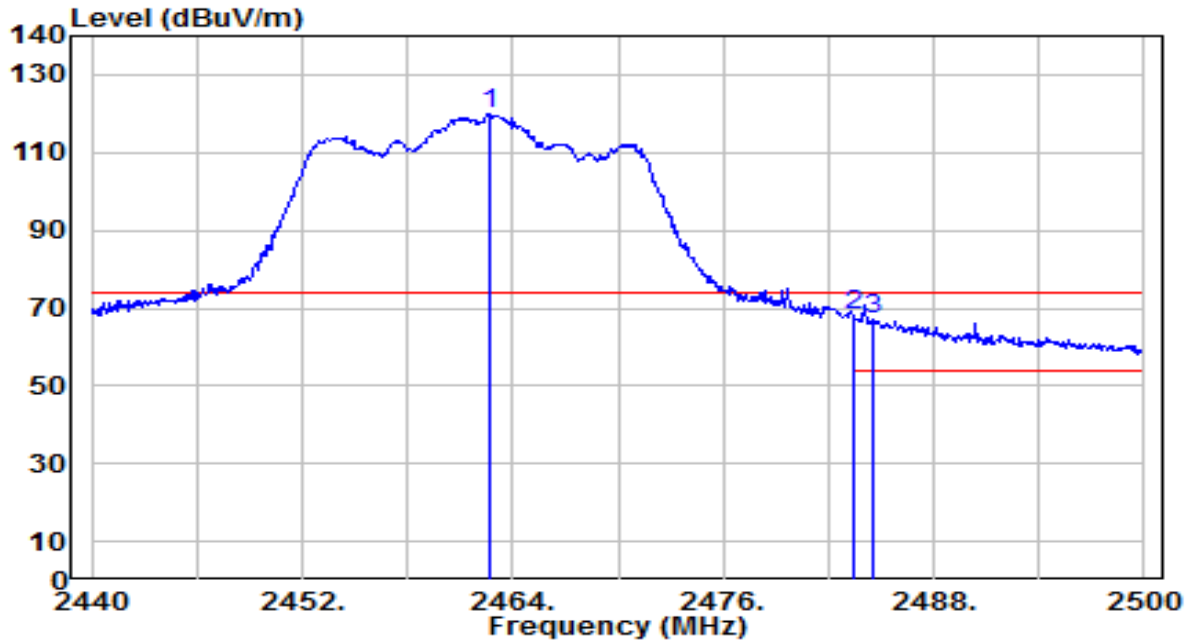


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.620	88.95	30.84	119.79	N/A	N/A	100	210	Peak
2	* 2483.500	37.11	30.91	68.02	-5.98	74.00	100	210	Peak
3	2484.520	36.29	30.92	67.20	-6.80	74.00	100	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

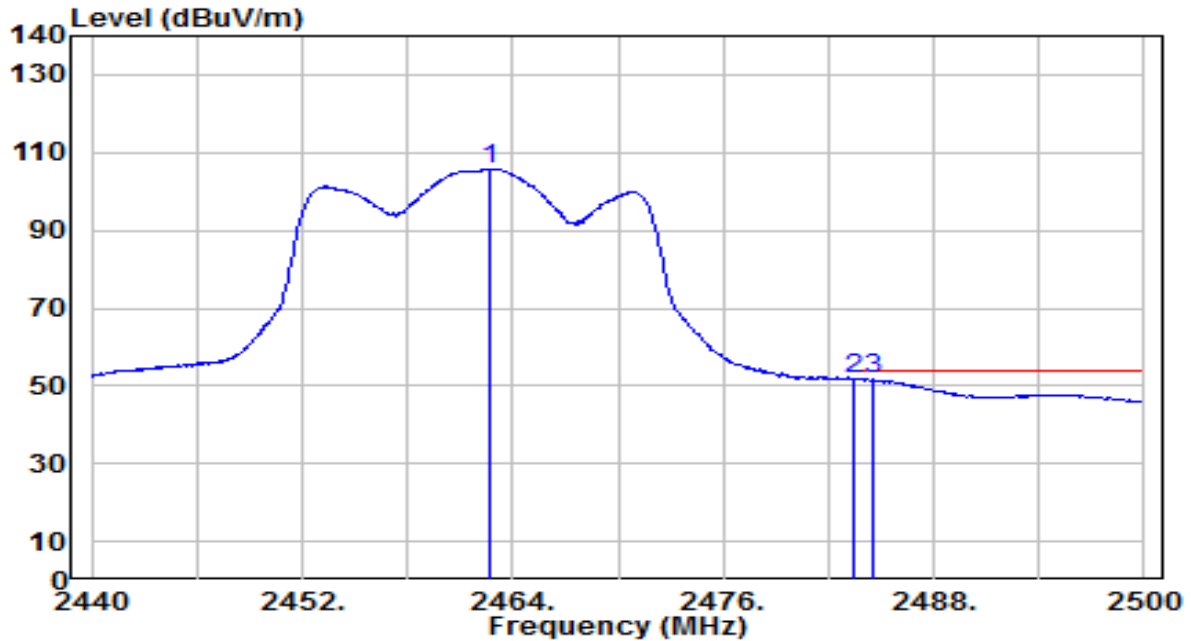


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.620	74.94	30.84	105.78	N/A	N/A	100	210	Average
2	* 2483.500	20.86	30.91	51.78	-2.22	54.00	100	210	Average
3	2484.580	20.61	30.92	51.53	-2.47	54.00	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

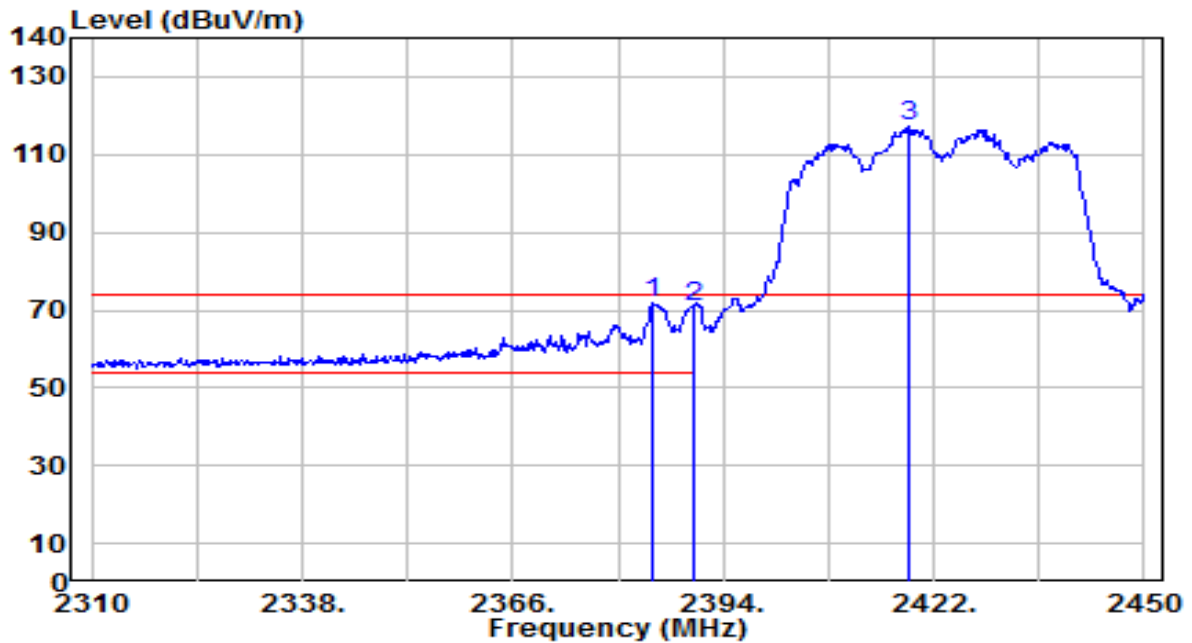


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.480	41.16	30.61	71.76	-2.24	74.00	240	130	Peak
2	2390.000	40.29	30.61	70.90	-3.10	74.00	240	130	Peak
3	2418.640	86.79	30.69	117.48	N/A	N/A	240	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

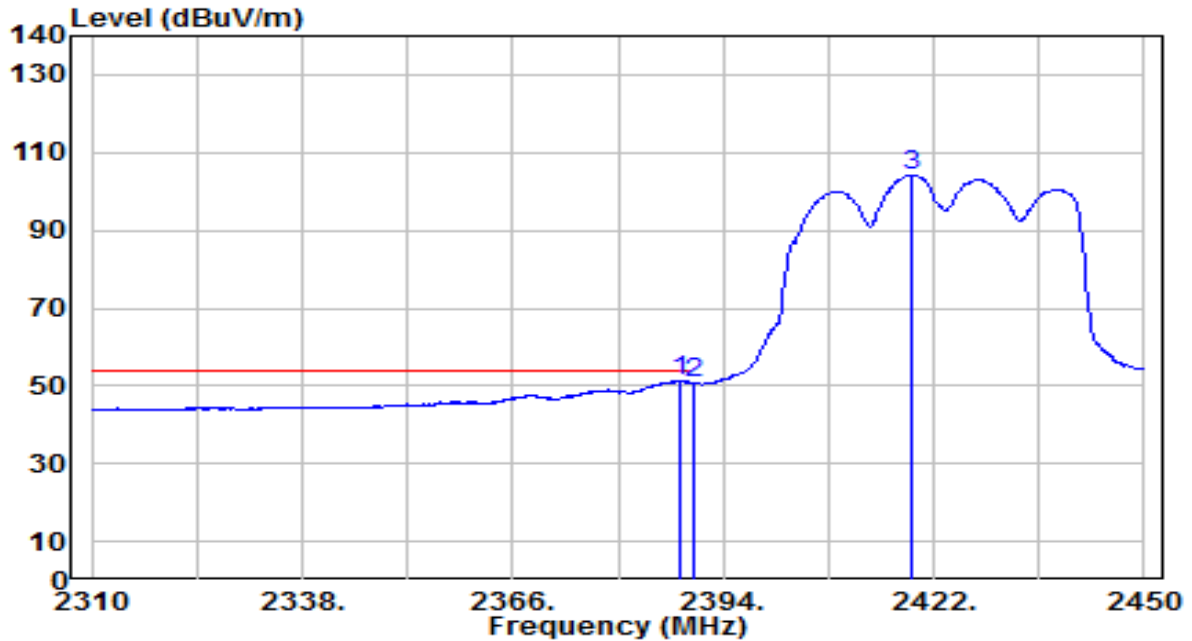


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.260	20.53	30.61	51.14	-2.86	54.00	240	130	Average
2	2390.000	20.17	30.61	50.78	-3.22	54.00	240	130	Average
3	2418.920	73.55	30.69	104.24	N/A	N/A	240	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

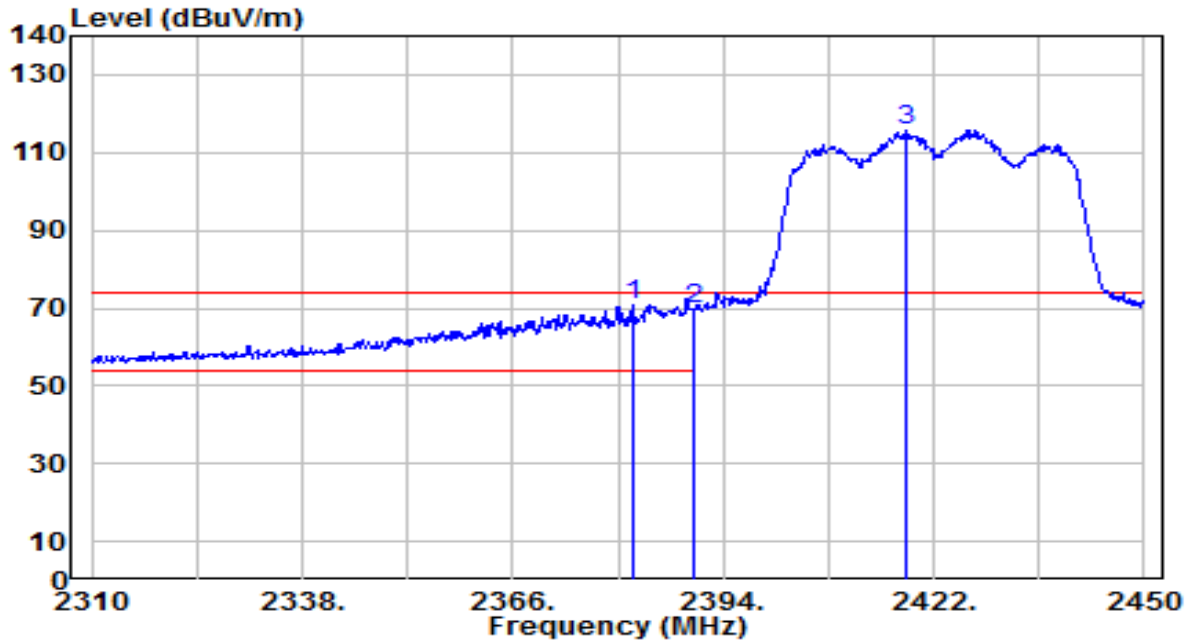


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2381.960	39.96	30.60	70.56	-3.44	74.00	100	210	Peak
2	2390.000	39.19	30.61	69.80	-4.20	74.00	100	210	Peak
3	2418.220	85.18	30.69	115.87	N/A	N/A	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

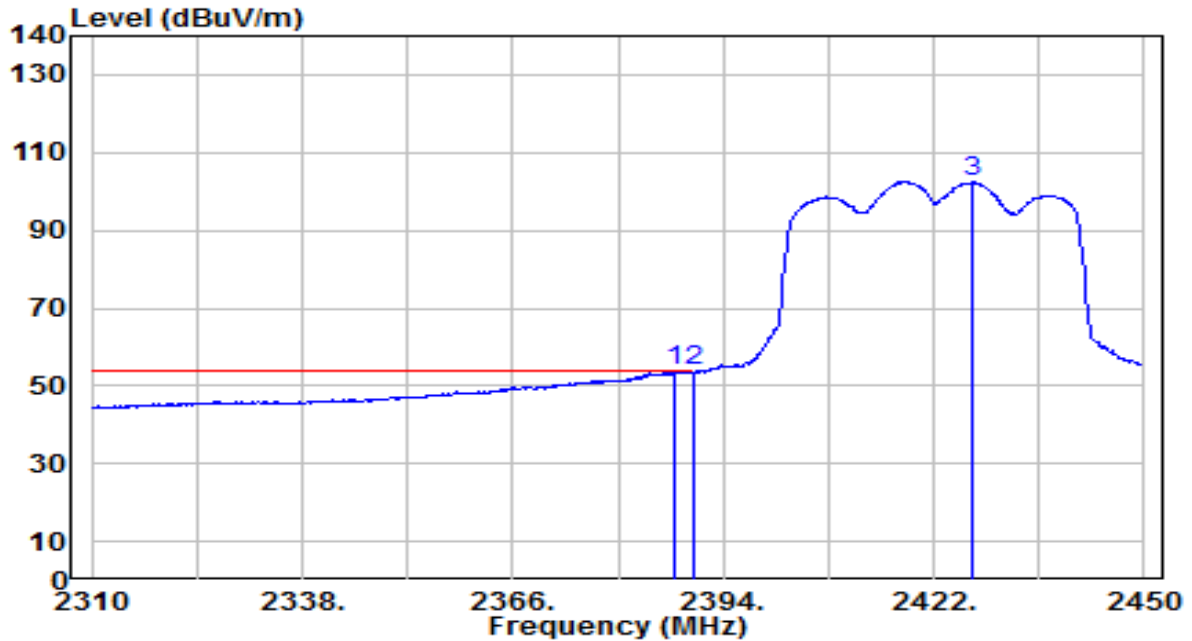


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23.28	30.61	53.89	-0.11	54.00	100	210	Average
2		23.23	30.61	53.85	-0.15	54.00	100	210	Average
3		71.75	30.72	102.47	N/A	N/A	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

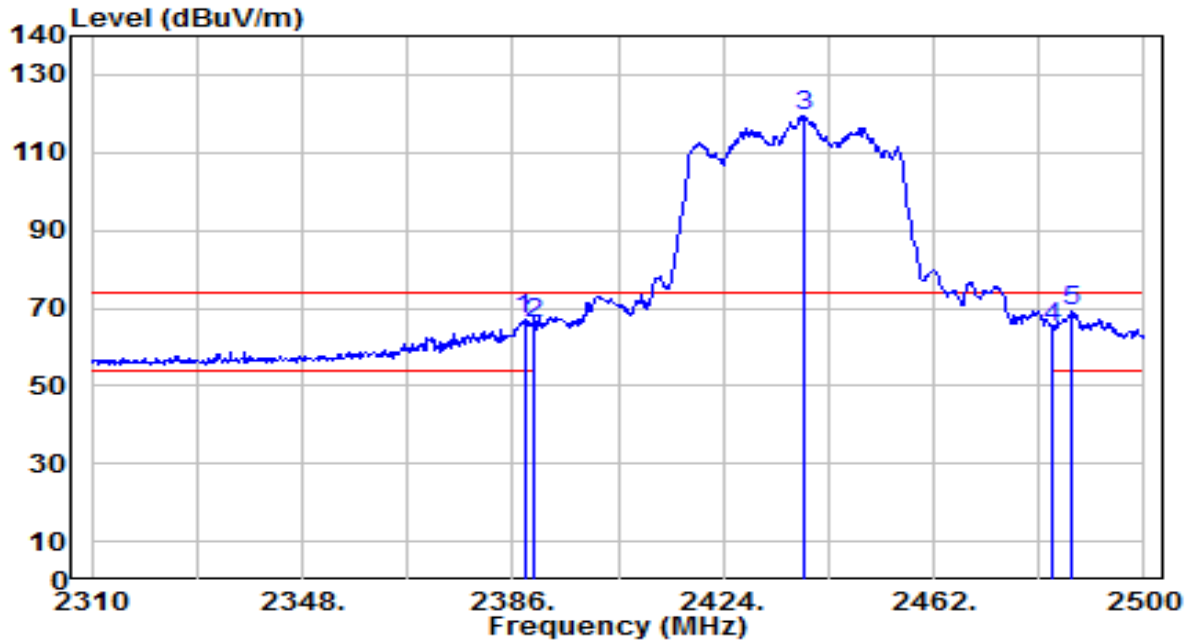


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.090	36.65	30.61	67.26	-6.74	74.00	215	140	Peak
2	2390.000	35.16	30.61	65.77	-8.23	74.00	215	140	Peak
3	2438.440	88.89	30.76	119.65	N/A	N/A	215	140	Peak
4	2483.500	34.03	30.91	64.95	-9.05	74.00	215	140	Peak
5	* 2486.700	38.05	30.92	68.98	-5.02	74.00	215	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

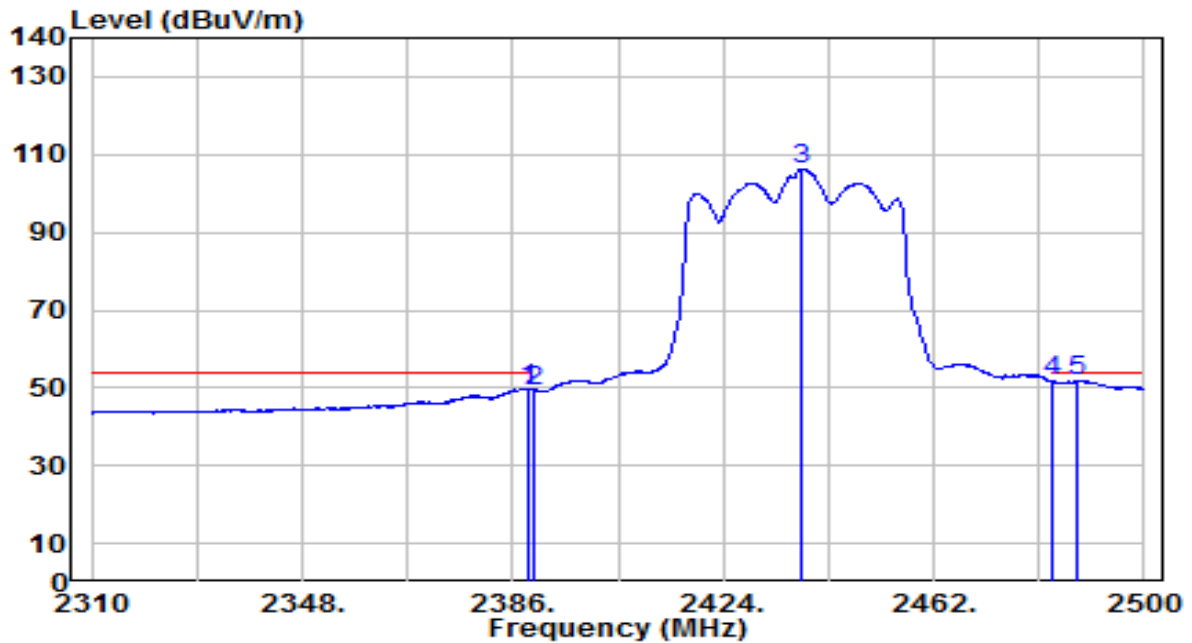


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	19.26	30.61	49.88	-4.12	54.00	215	140	Average
2	2390.000	18.70	30.61	49.31	-4.69	54.00	215	140	Average
3	2438.250	75.67	30.76	106.43	N/A	N/A	215	140	Average
4	2483.500	20.67	30.91	51.58	-2.42	54.00	215	140	Average
5	* 2487.840	20.85	30.93	51.78	-2.22	54.00	215	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

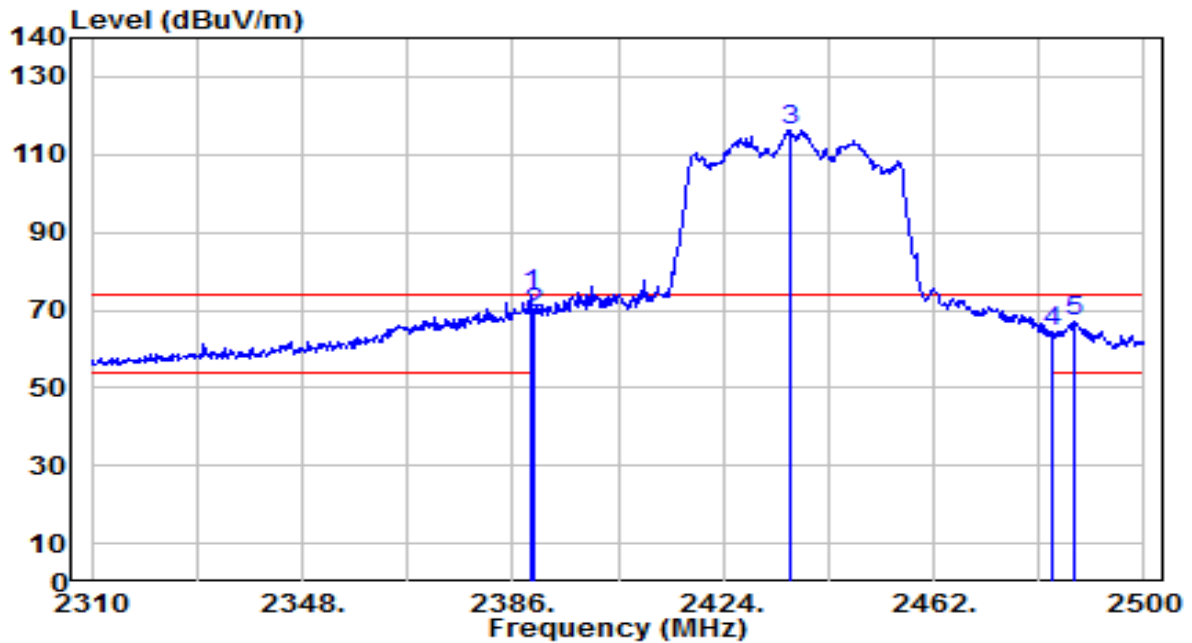


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.230	43.26	30.61	73.87	-0.13	74.00	100	210	Peak
2	2390.000	38.56	30.61	69.18	-4.82	74.00	100	210	Peak
3	2435.970	85.35	30.75	116.10	N/A	N/A	100	210	Peak
4	2483.500	33.59	30.91	64.50	-9.50	74.00	100	210	Peak
5	2487.270	35.96	30.93	66.89	-7.11	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

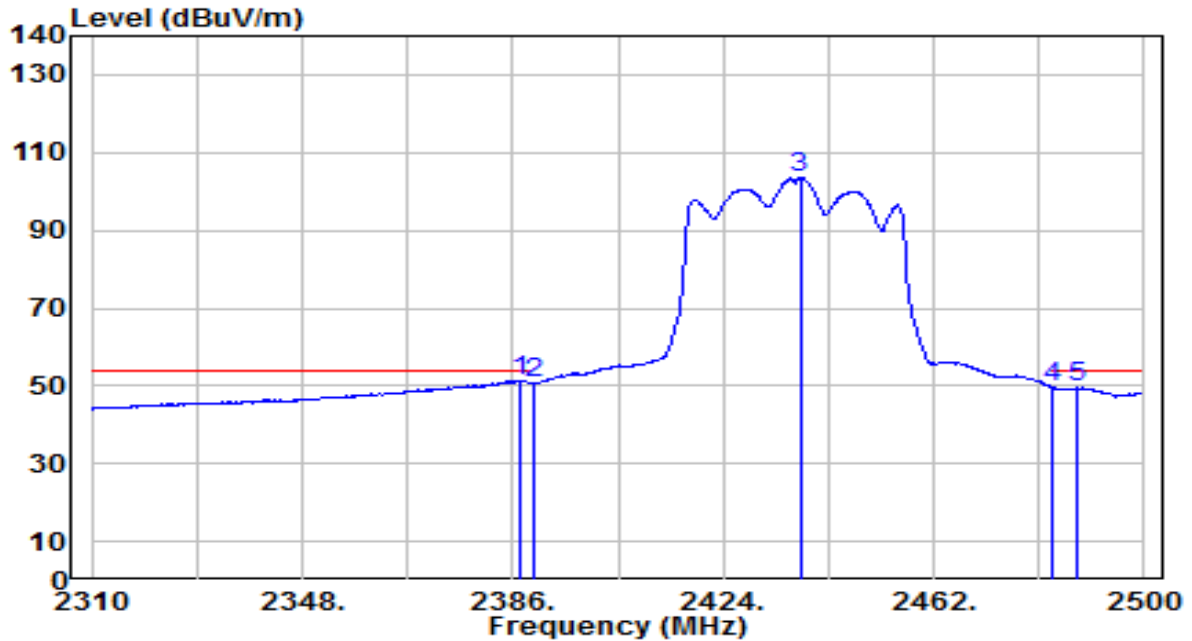


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.520	20.87	30.61	51.48	-2.52	54.00	100	210	Average
2	2390.000	20.15	30.61	50.76	-3.24	54.00	100	210	Average
3	2437.870	72.85	30.76	103.61	N/A	N/A	100	210	Average
4	2483.500	18.74	30.91	49.65	-4.35	54.00	100	210	Average
5	2488.030	18.49	30.93	49.42	-4.58	54.00	100	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

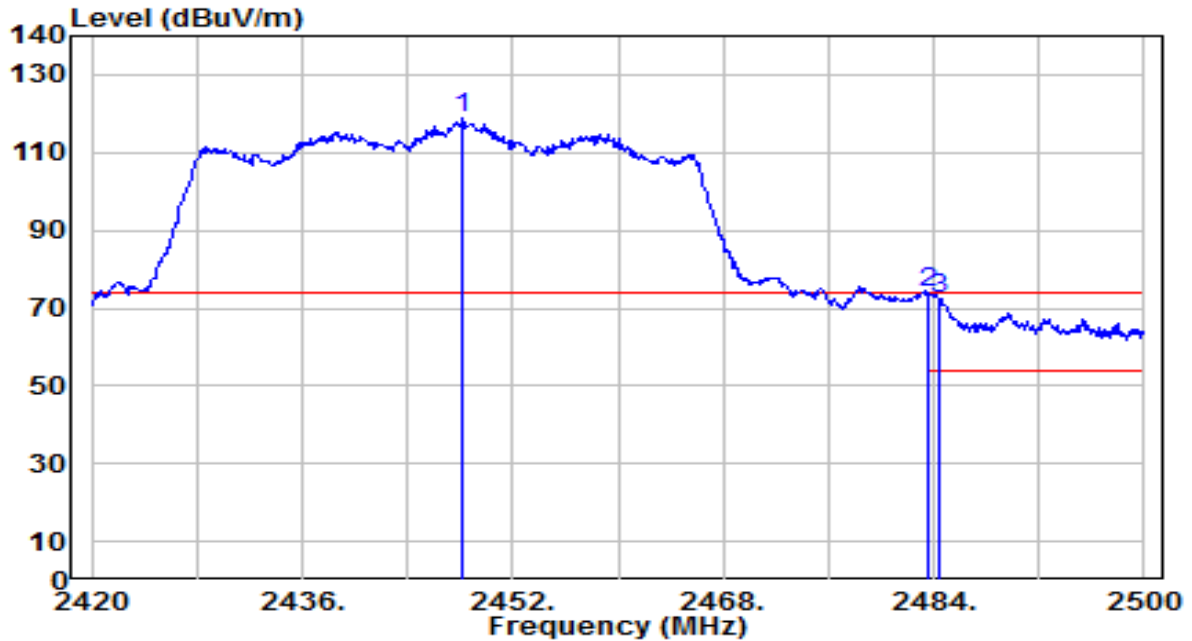


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.240	88.10	30.79	118.89	N/A	N/A	215	140	Peak
2	* 2483.500	43.08	30.91	73.99	-0.01	74.00	215	140	Peak
3	2484.480	41.50	30.92	72.42	-1.58	74.00	215	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

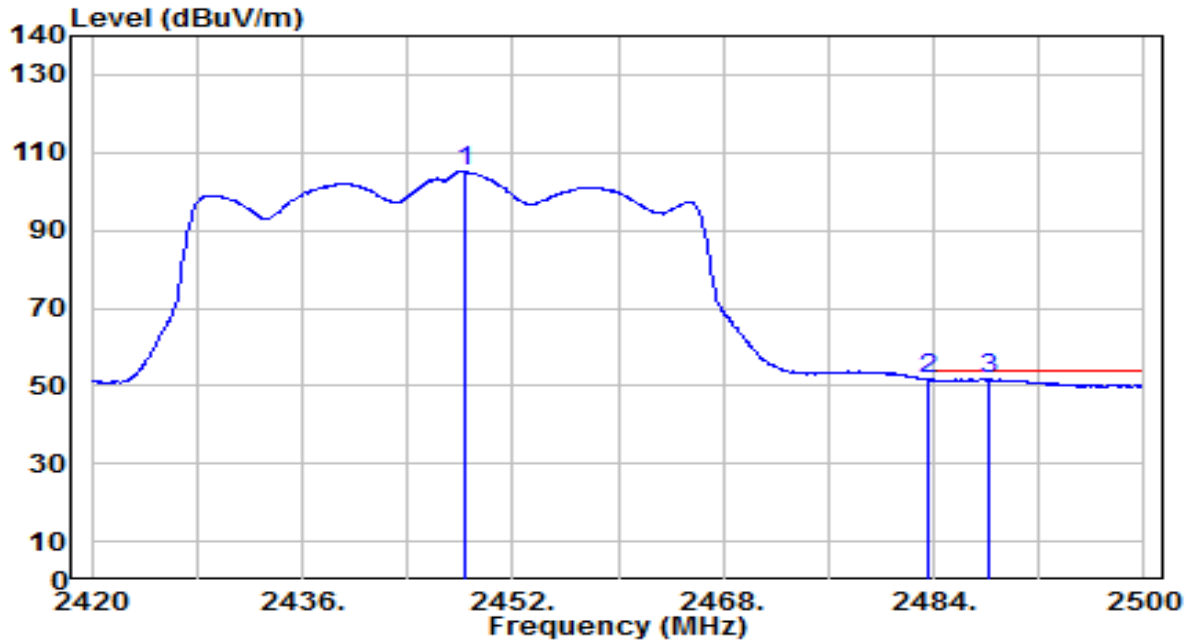


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.400	74.19	30.79	104.99	N/A	N/A	215	140	Average
2	2483.500	20.64	30.91	51.55	-2.45	54.00	215	140	Average
3	* 2488.240	20.82	30.93	51.75	-2.25	54.00	215	140	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

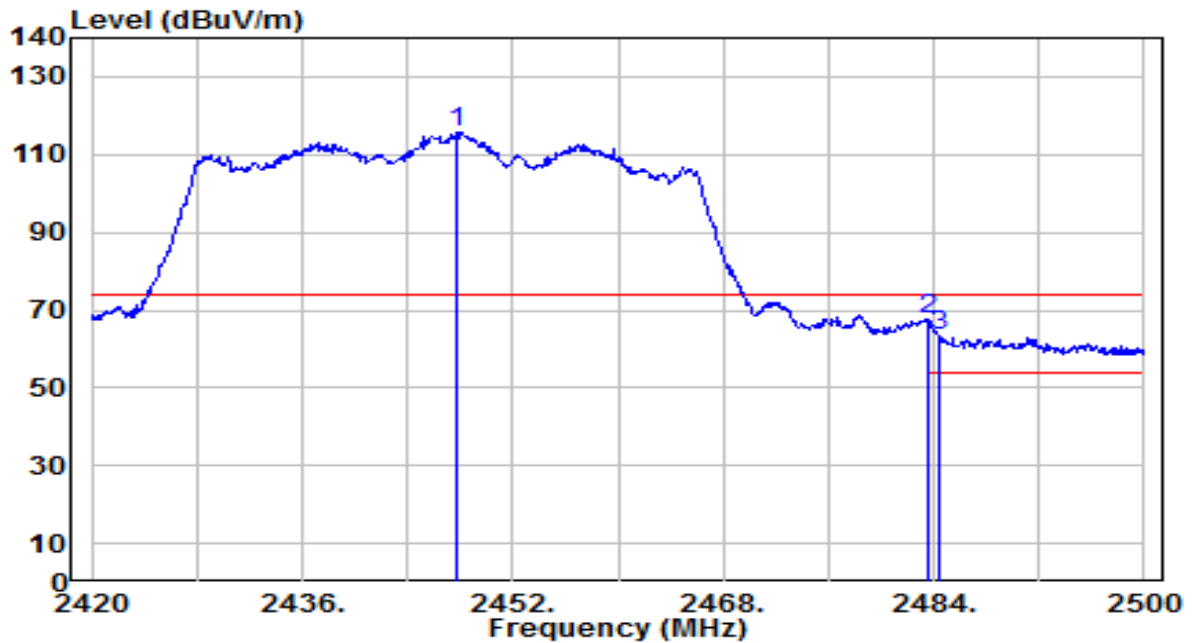


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.840	85.14	30.79	115.93	N/A	N/A	100	205	Peak
2	* 2483.500	36.74	30.91	67.66	-6.34	74.00	100	205	Peak
3	2484.480	32.67	30.92	63.58	-10.42	74.00	100	205	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

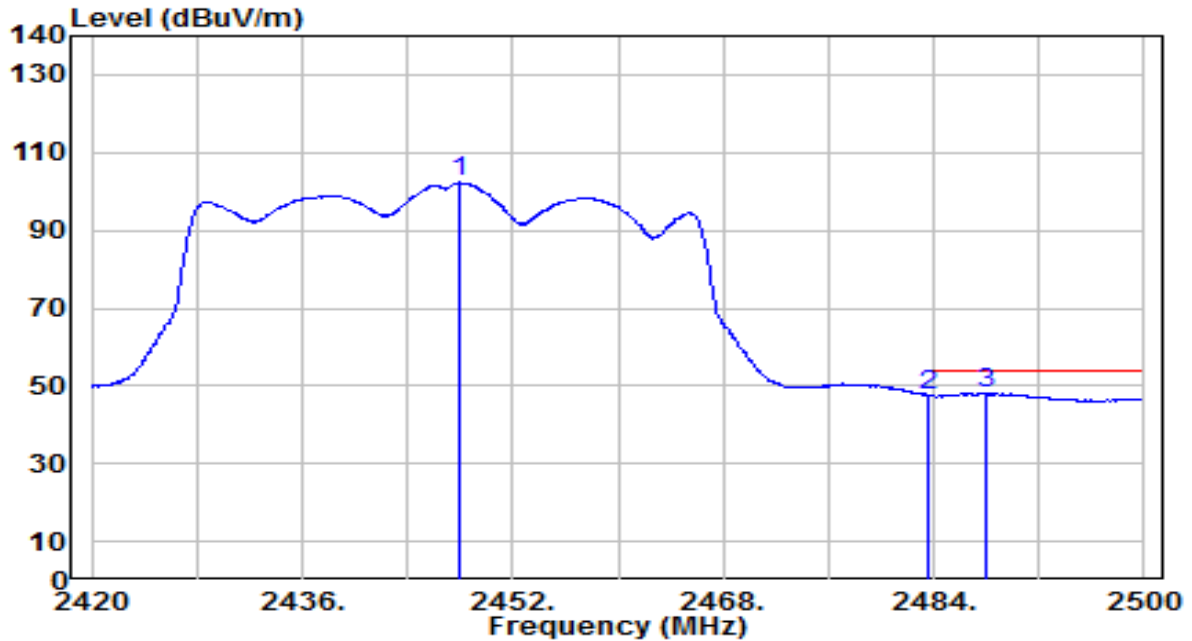


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.000	71.46	30.79	102.26	N/A	N/A	100	205	Average
2	2483.500	16.85	30.91	47.76	-6.24	54.00	100	205	Average
3	* 2488.000	17.24	30.93	48.17	-5.83	54.00	100	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

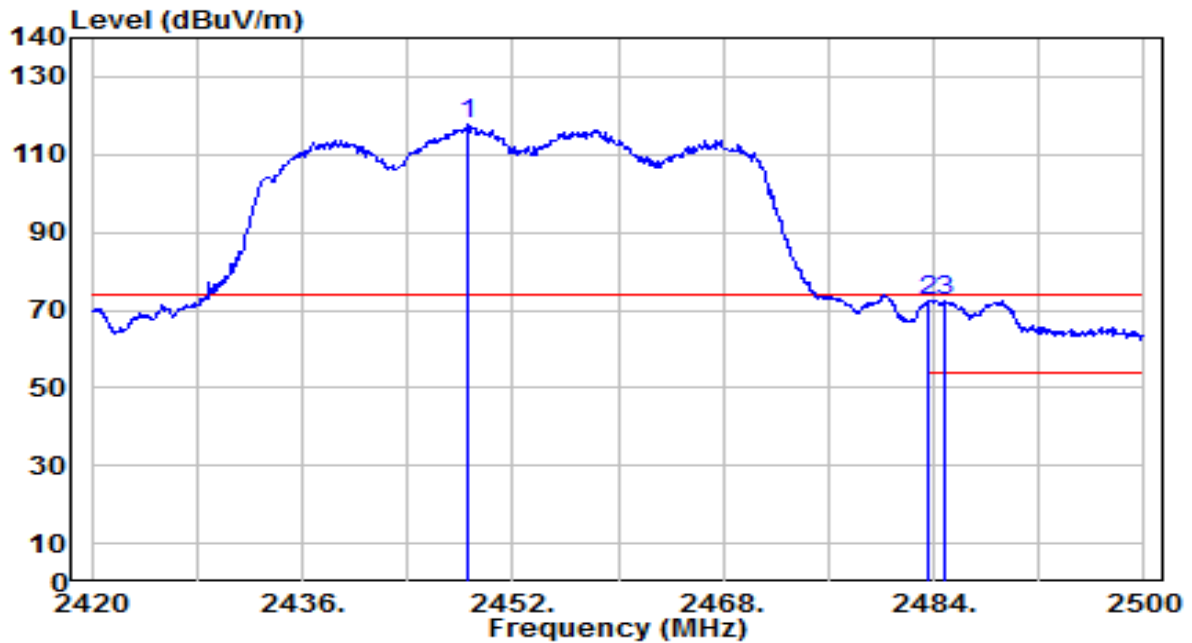


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.640	86.86	30.79	117.65	N/A	N/A	210	140	Peak
2	* 2483.500	41.42	30.91	72.34	-1.66	74.00	210	140	Peak
3	2484.800	41.27	30.92	72.19	-1.81	74.00	210	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

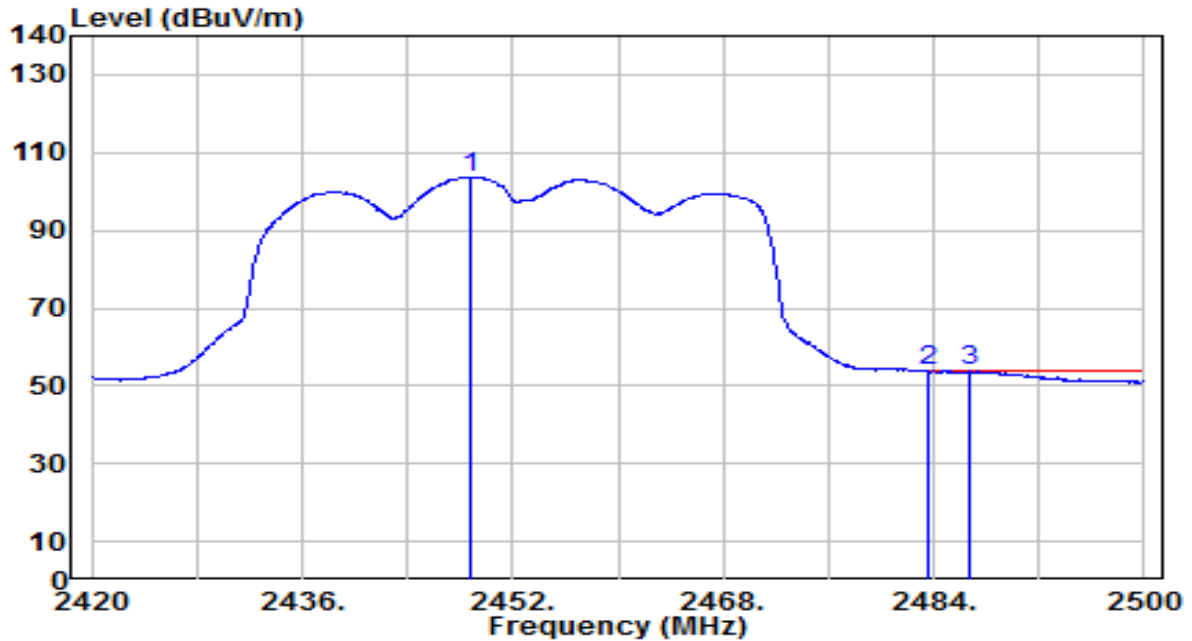


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.800	72.97	30.79	103.76	N/A	N/A	210	140	Average
2	2483.500	22.88	30.91	53.80	-0.20	54.00	210	140	Average
3	* 2486.640	22.89	30.92	53.81	-0.19	54.00	210	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

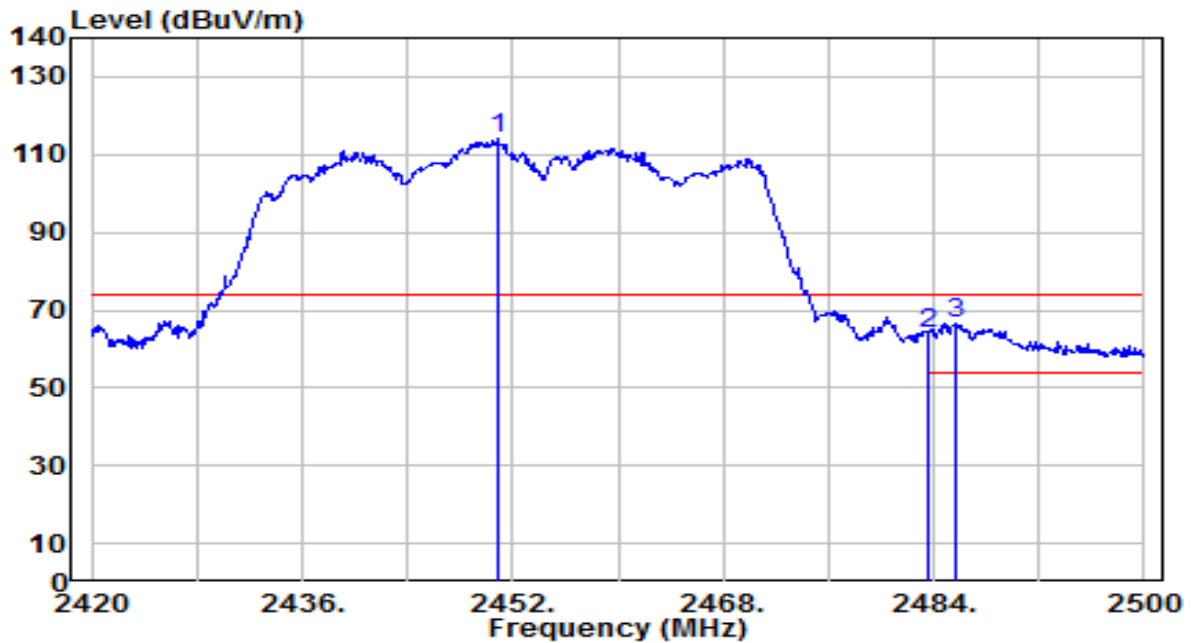


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.800	83.38	30.80	114.19	N/A	N/A	100	135	Peak
2	2483.500	32.84	30.91	63.75	-10.25	74.00	100	135	Peak
3	* 2485.600	35.51	30.92	66.43	-7.57	74.00	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-12
Factor	DRH18-E	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

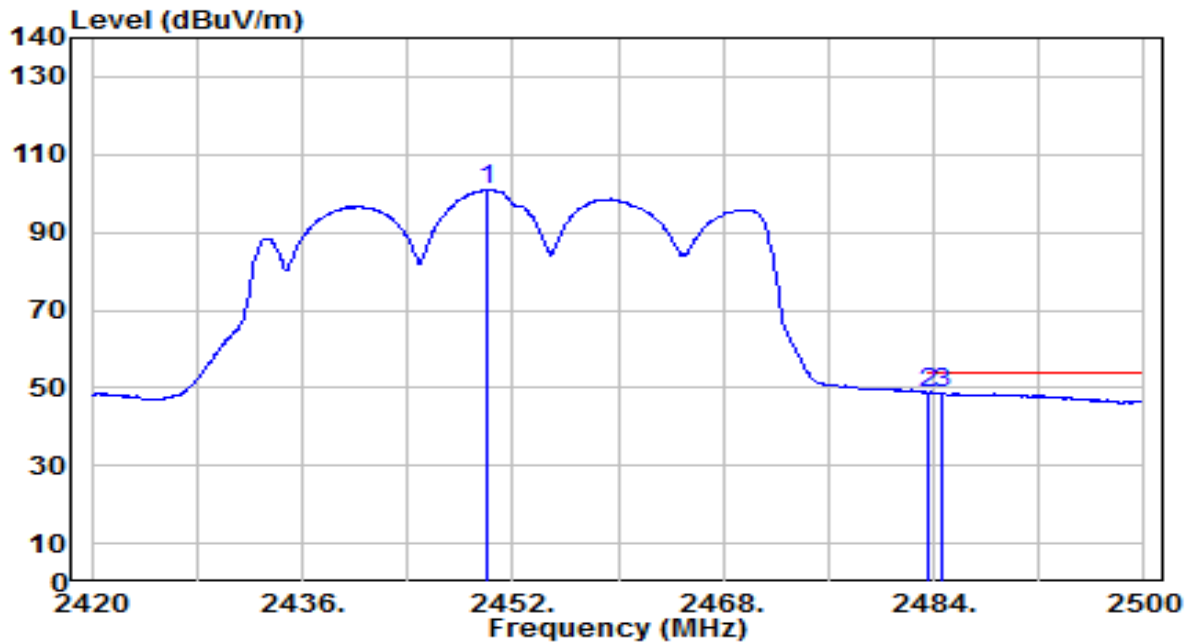

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.080	70.14	30.80	100.94	N/A	N/A	100	135	Average
2	* 2483.500	17.81	30.91	48.73	-5.27	54.00	100	135	Average
3	2484.720	17.77	30.92	48.68	-5.32	54.00	100	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

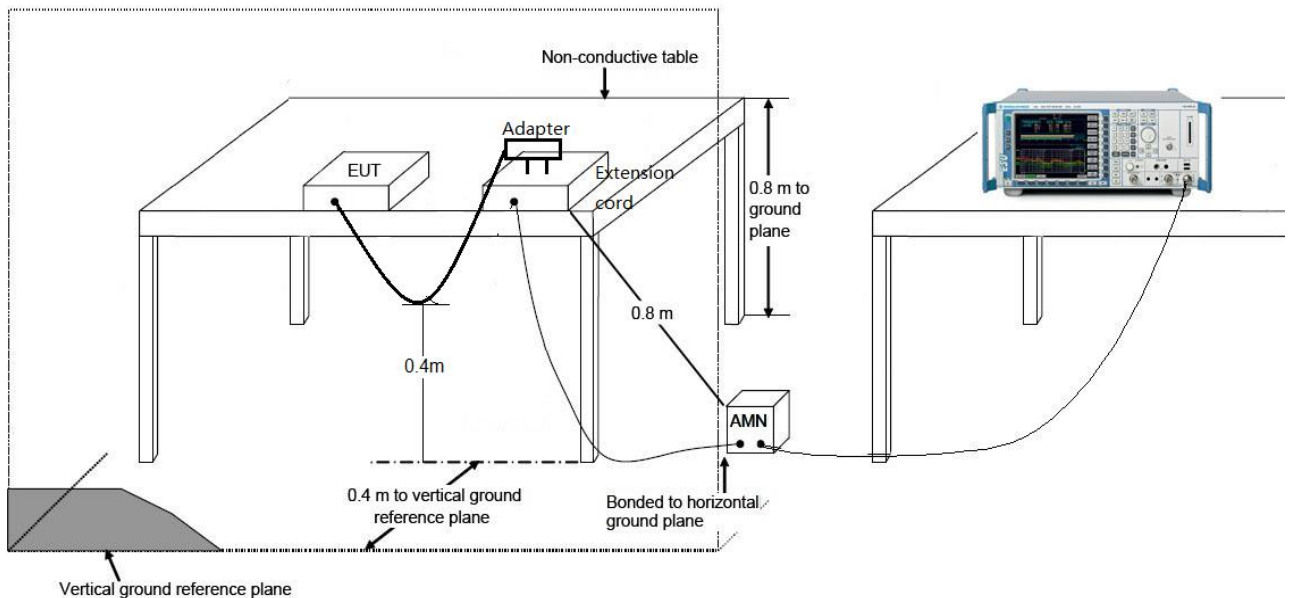

7.8.3. Test Result

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-11
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.1°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

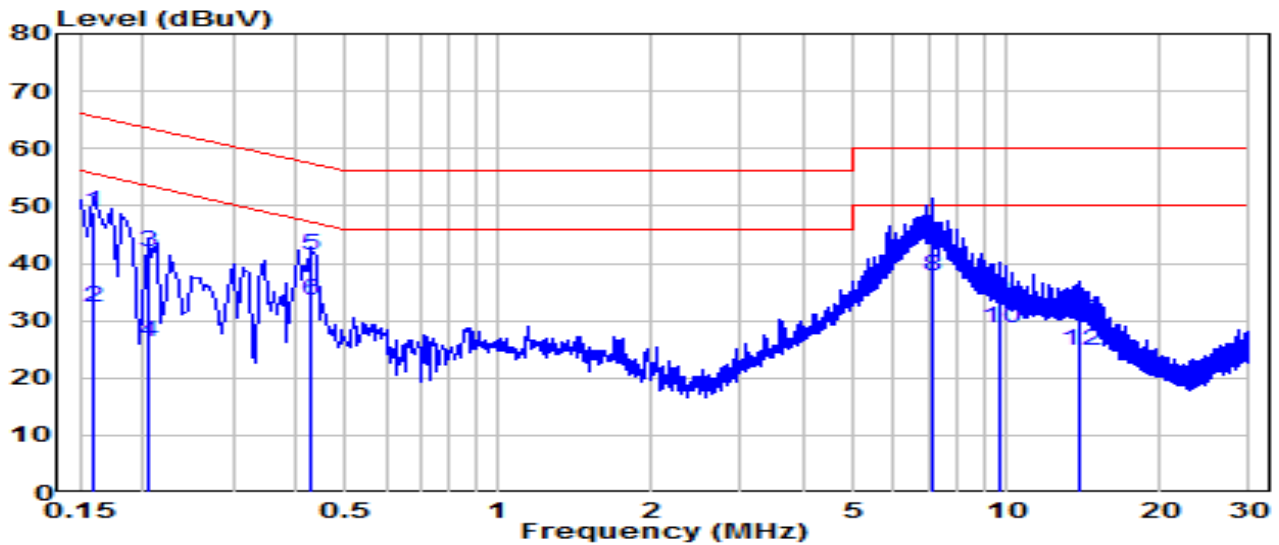


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.159	39.16	9.62	48.78	-16.73	65.52	QP
2	0.159	22.64	9.62	32.26	-23.25	55.52	Average
3	0.204	32.22	9.62	41.85	-21.60	63.45	QP
4	0.204	16.63	9.62	26.26	-27.19	53.45	Average
5	0.424	31.76	9.64	41.40	-15.96	57.36	QP
6	0.424	23.80	9.64	33.44	-13.92	47.36	Average
7	* 7.138	33.66	9.79	43.46	-16.54	60.00	QP
8	* 7.138	28.04	9.79	37.83	-12.17	50.00	Average
9	9.685	23.76	9.85	33.61	-26.39	60.00	QP
10	9.685	18.82	9.85	28.68	-21.32	50.00	Average
11	13.995	20.18	9.88	30.06	-29.94	60.00	QP
12	13.995	14.73	9.88	24.61	-25.39	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-11
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.1°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

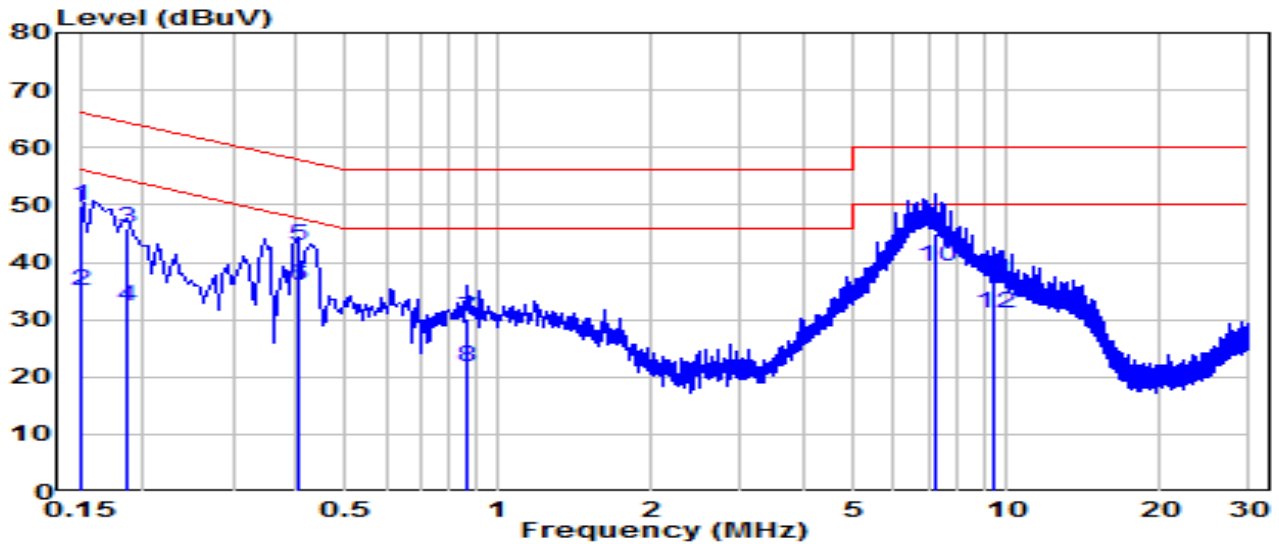


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	40.26	9.62	49.88	-16.12	66.00	QP
2	0.150	25.34	9.62	34.96	-21.04	56.00	Average
3	0.186	36.12	9.62	45.74	-18.47	64.21	QP
4	0.186	22.73	9.62	32.36	-21.86	54.21	Average
5	0.402	33.27	9.63	42.90	-14.91	57.81	QP
6	0.402	26.33	9.63	35.97	-11.84	47.81	Average
7	0.870	20.40	9.66	30.07	-25.93	56.00	QP
8	0.870	12.18	9.66	21.84	-24.16	46.00	Average
9	*	7.250	9.80	44.91	-15.09	60.00	QP
10	*	7.250	9.80	39.14	-10.86	50.00	Average
11	9.410	26.59	9.86	36.44	-23.56	60.00	QP
12	9.410	21.33	9.86	31.19	-18.81	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-11
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.1°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

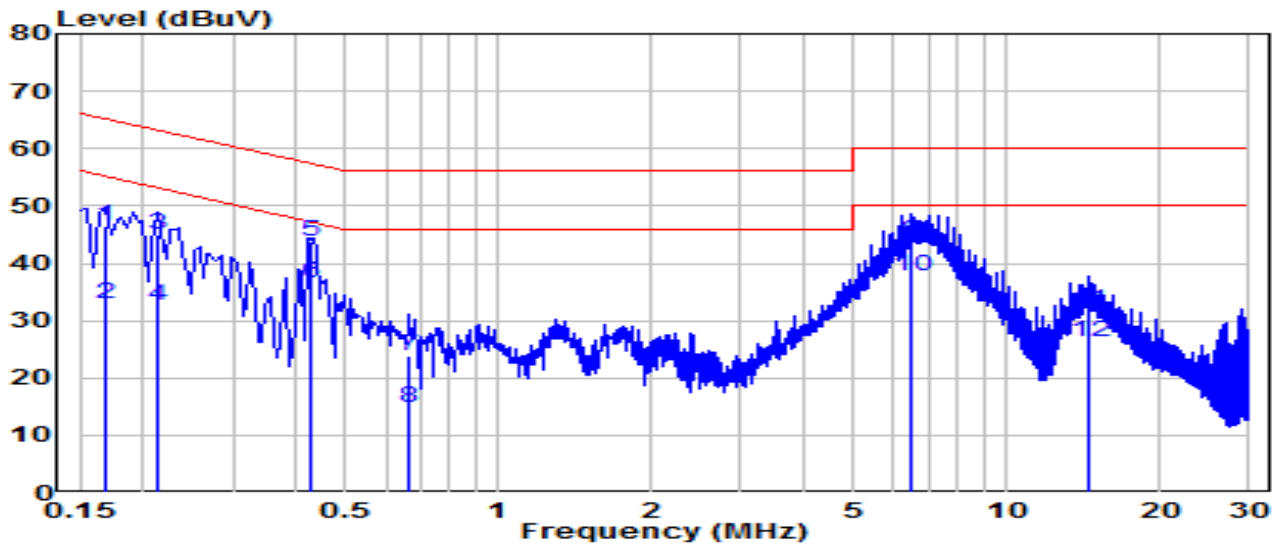


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	36.75	9.62	46.37	-18.69	65.06	QP
2	0.168	23.25	9.62	32.87	-22.19	55.06	Average
3	0.213	35.47	9.62	45.10	-17.99	63.09	QP
4	0.213	22.99	9.62	32.62	-20.47	53.09	Average
5	* 0.424	33.99	9.64	43.63	-13.73	57.36	QP
6	* 0.424	27.00	9.64	36.64	-10.72	47.36	Average
7	0.667	14.35	9.65	24.00	-32.00	56.00	QP
8	0.667	5.06	9.65	14.71	-31.29	46.00	Average
9	6.526	33.90	9.78	43.68	-16.32	60.00	QP
10	6.526	27.84	9.78	37.62	-12.38	50.00	Average
11	14.445	21.72	9.89	31.60	-28.40	60.00	QP
12	14.445	16.38	9.89	26.27	-23.73	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE5400 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-10-11
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.1°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

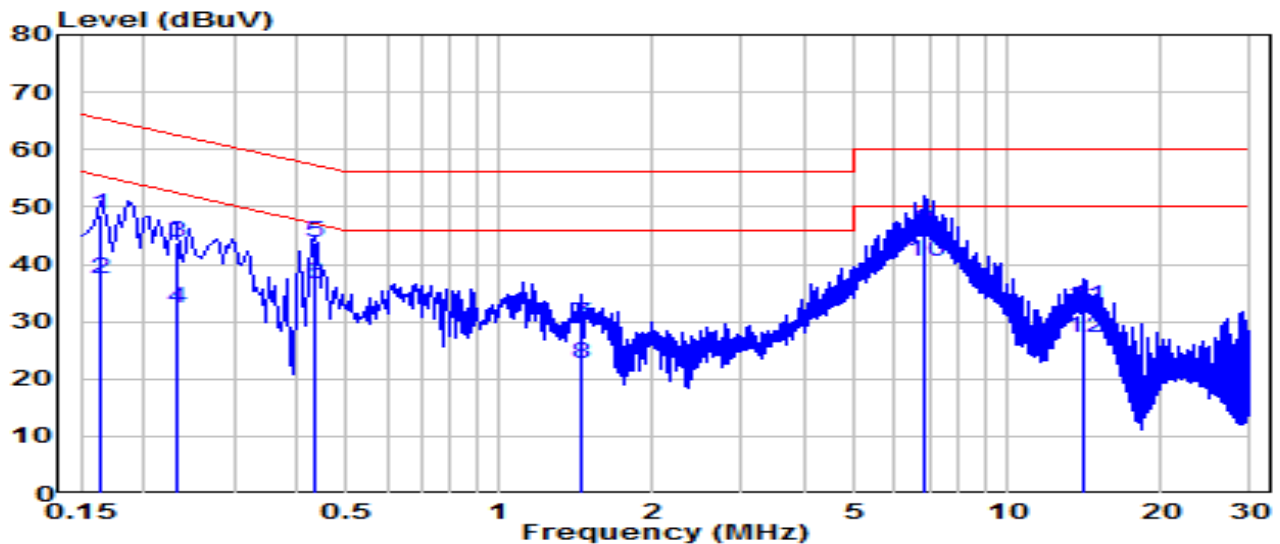

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	39.08	9.62	48.70	-16.59	65.28	QP
2	0.163	27.83	9.62	37.45	-17.84	55.28	Average
3	0.231	34.28	9.62	43.90	-18.51	62.41	QP
4	0.231	22.77	9.62	32.40	-20.02	52.41	Average
5	0.433	34.02	9.64	43.65	-13.53	57.19	QP
6	0.433	26.84	9.64	36.48	-10.71	47.19	Average
7	1.441	19.83	9.68	29.50	-26.50	56.00	QP
8	1.441	12.83	9.68	22.51	-23.49	46.00	Average
9	* 6.845	36.06	9.79	45.85	-14.15	60.00	QP
10	* 6.845	30.56	9.79	40.35	-9.65	50.00	Average
11	14.148	22.56	9.92	32.48	-27.52	60.00	QP
12	14.148	17.28	9.92	27.20	-22.80	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

————— The End —————

Appendix A : Test Setup Photograph

Refer to “2209TW0106-Setup Photo” file.

Appendix B : External Photograph

Refer to "2209TW0106-External Photo" file.

Appendix C : Internal Photograph

Refer to "2209TW0106-Internal Photo" file.