


802.11ac(HT40)

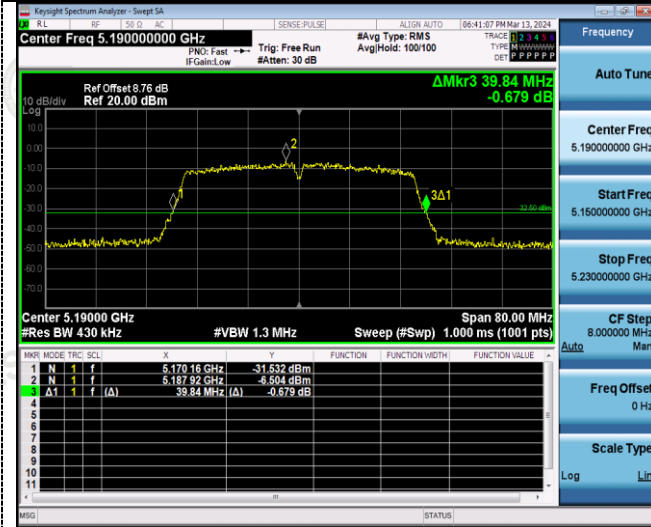

Frequency

Auto Tune

Center Freq
5.190000000 GHz

Start Freq
5.150000000 GHz


Stop Freq
5.230000000 GHz

CF Step
8.0000000 MHz

Freq Offset
0 Hz

Scale Type
Log

CH38

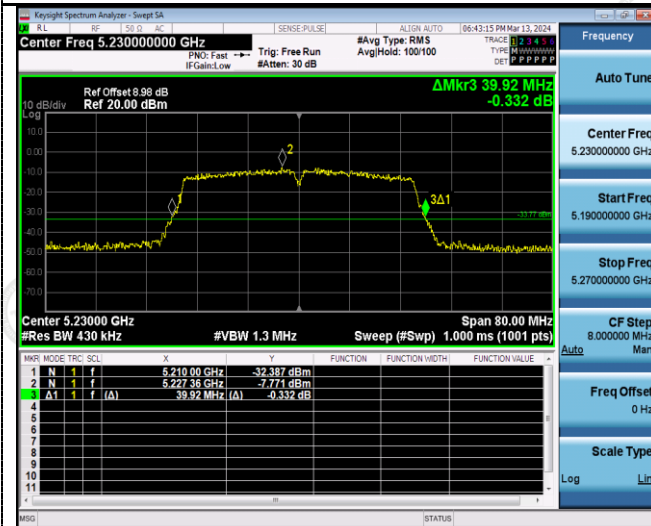

Frequency

Auto Tune

Center Freq
5.230000000 GHz

Start Freq
5.190000000 GHz

Stop Freq
5.270000000 GHz

CF Step
8.0000000 MHz

Freq Offset
0 Hz

Scale Type
Log

CH46

CH46

4.6 Minimum Emission Bandwidth (6dB Bandwidth)


Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.







Test Configuration



Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	15.000	≥500KHz	Pass
		157	14.720		
		165	13.800		
802.11n(HT20)	U-NII 3	149	15.040		
		157	15.080		
		165	14.160		
802.11n(HT40)	U-NII 3	151	35.040		
		159	34.960		
802.11ac(HT20)	U-NII 3	149	16.680		
		157	17.040		
		165	15.040		
802.11ac(HT40)	U-NII 3	151	35.040		
		159	35.120		

Test plot as follows:

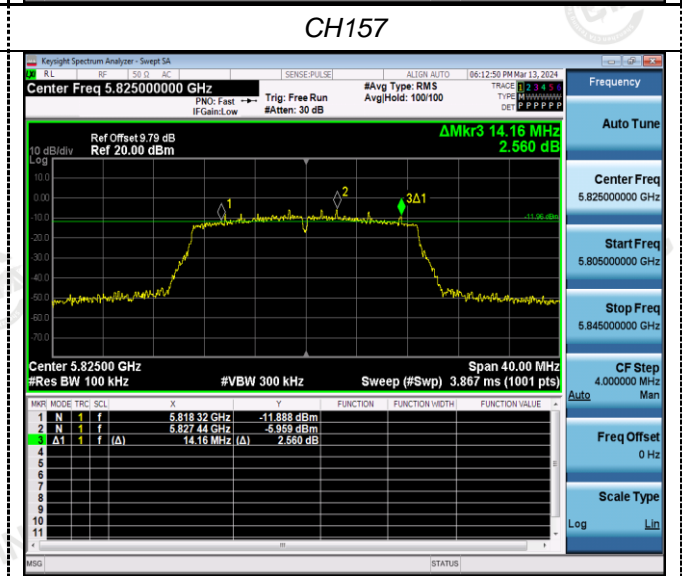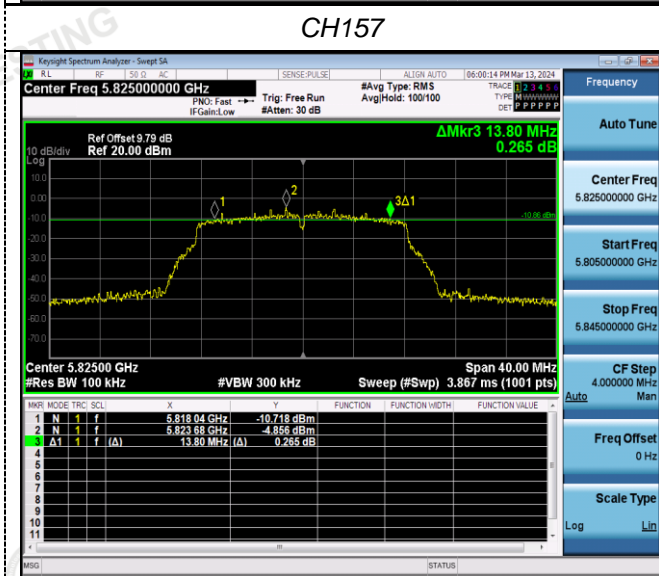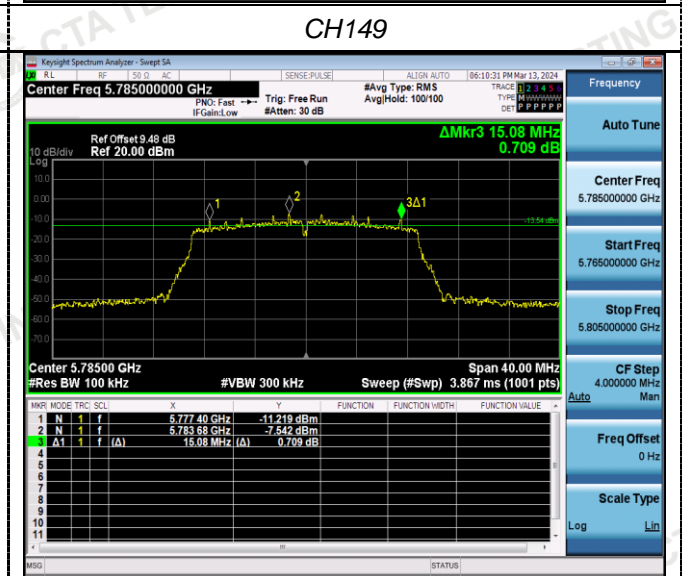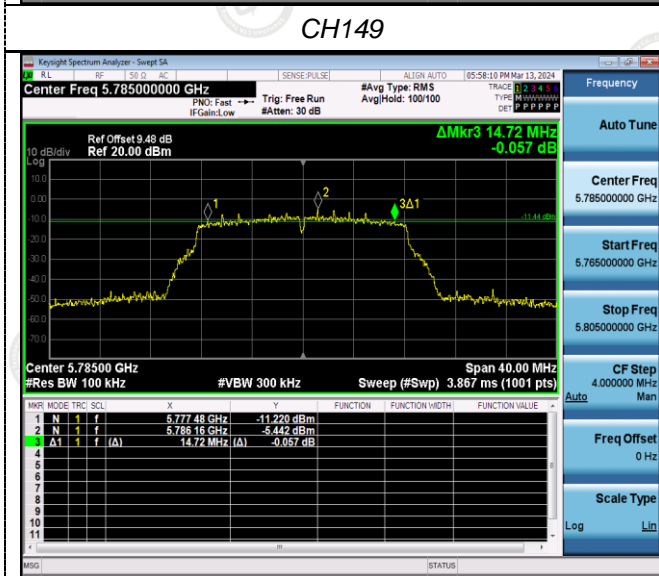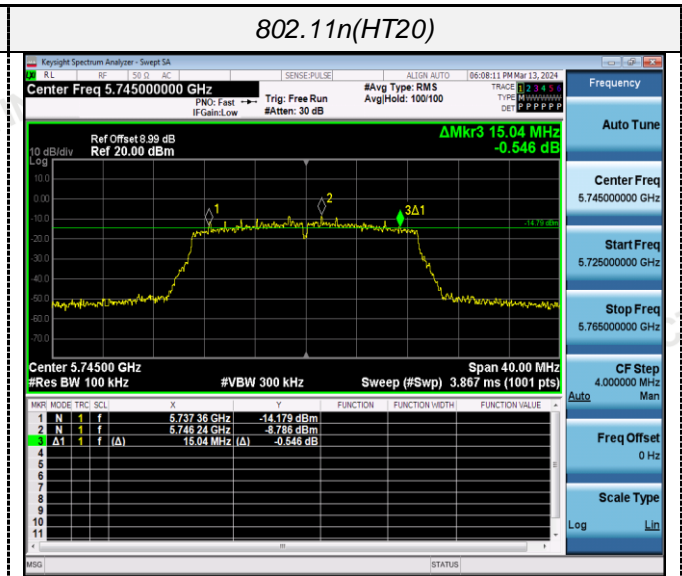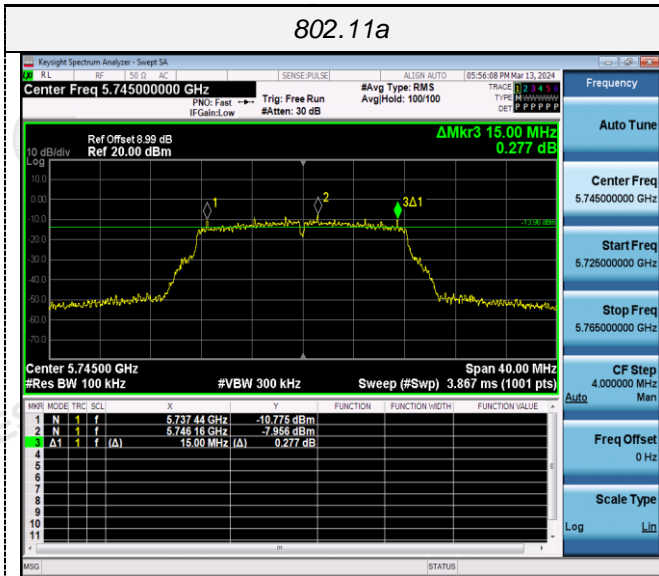


CH165

CH165

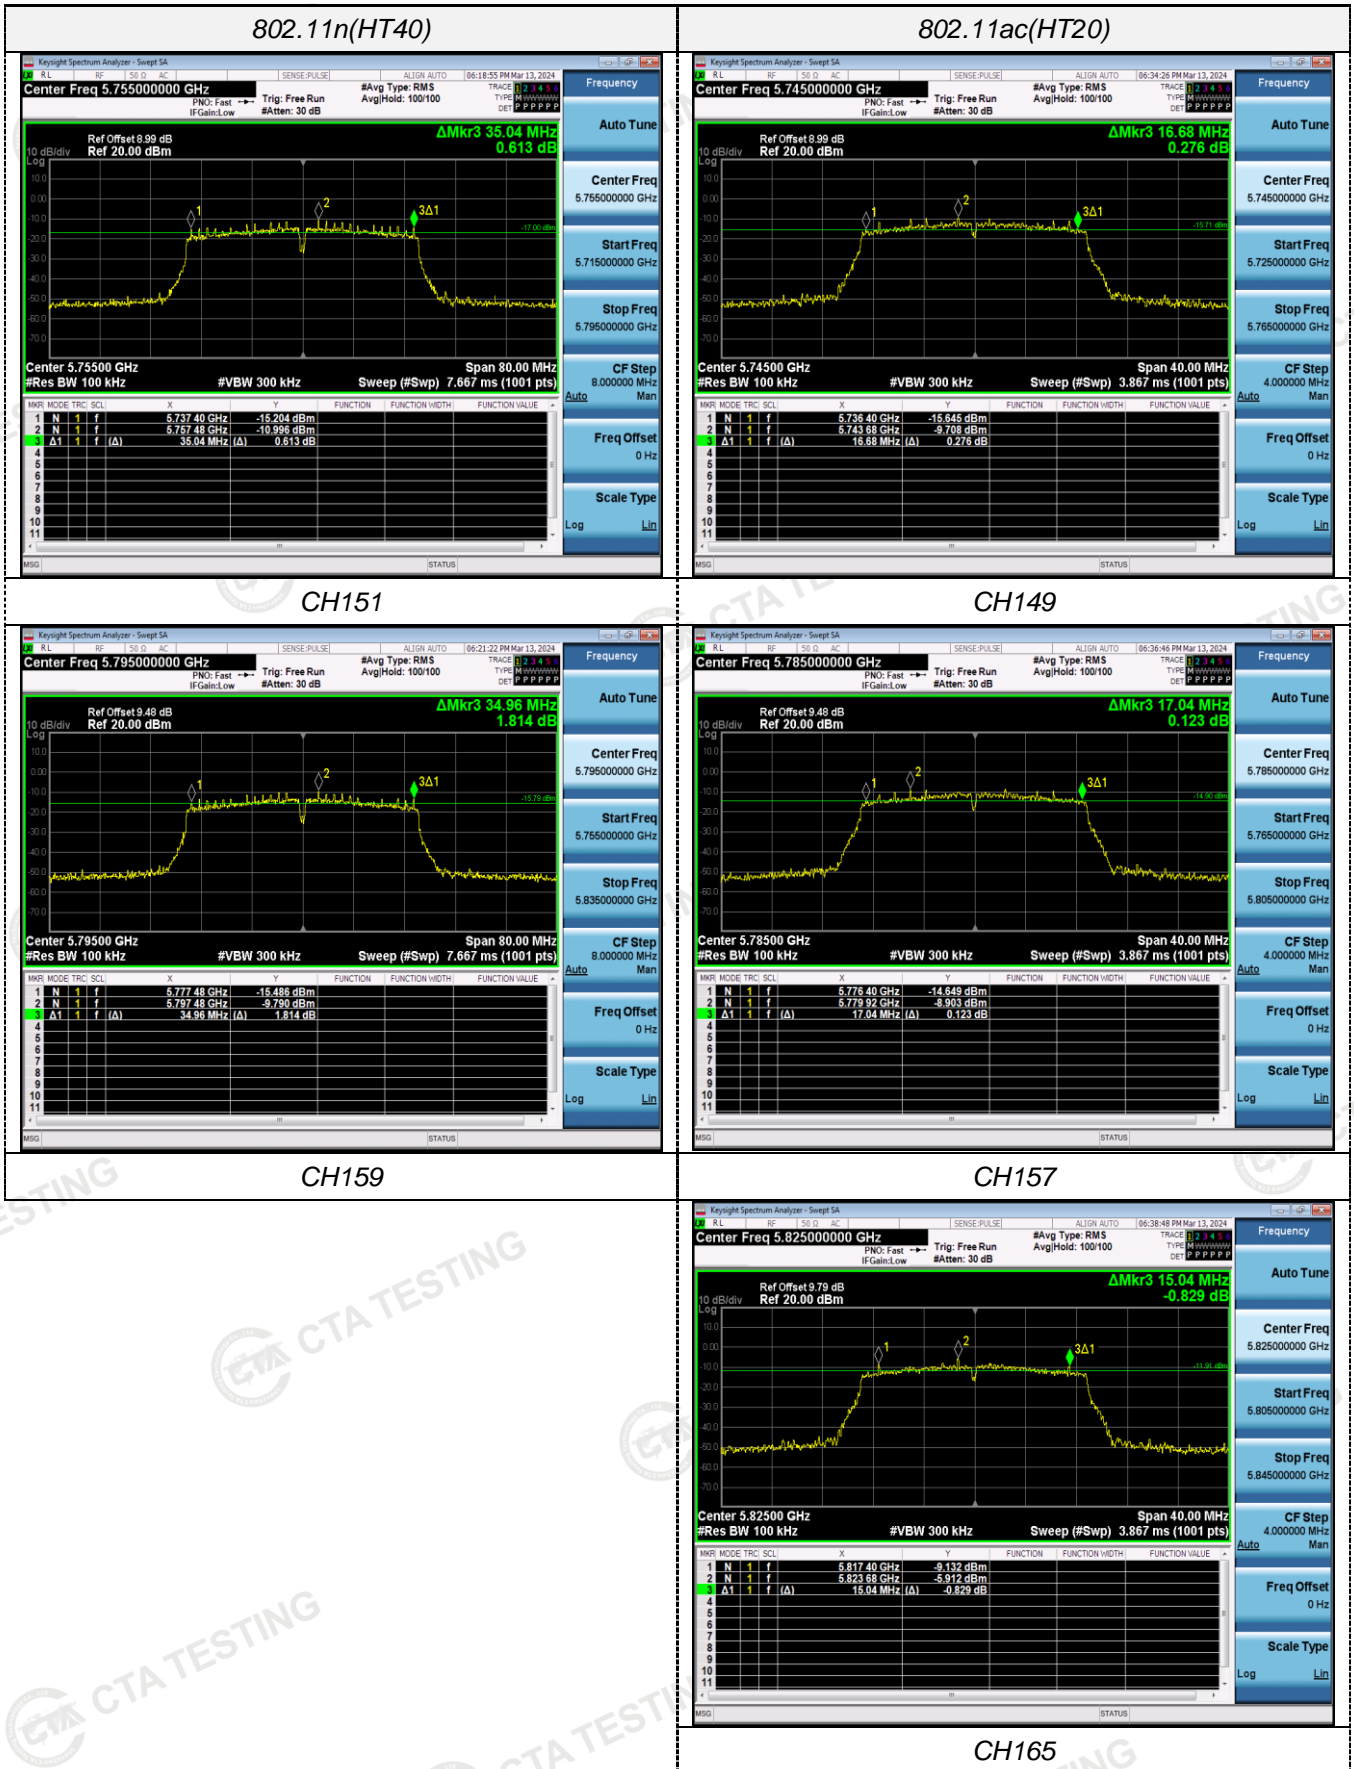


802.11ac(HT40)

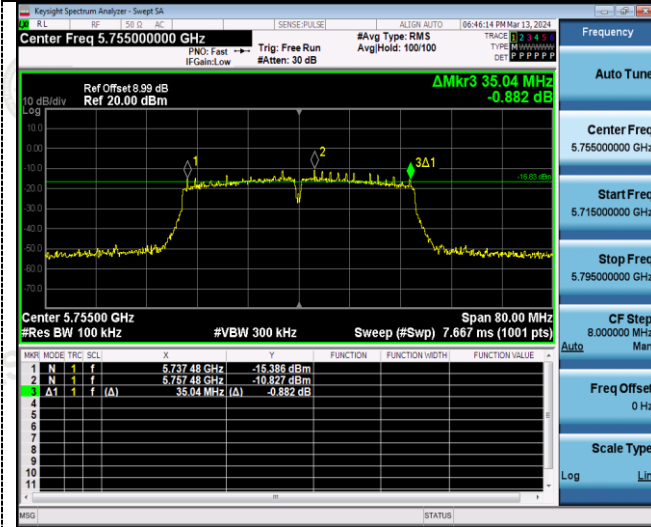

Frequency	
Auto Tune	
Center Freq	5.755000000 GHz
Start Freq	5.715000000 GHz
Stop Freq	5.795000000 GHz
CF Step	8.0000000 MHz
Freq Offset	0 Hz
Scale Type	Log

CH151

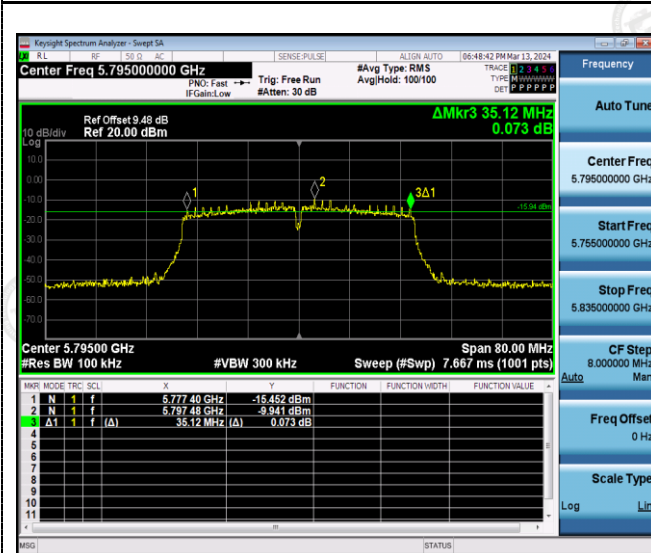

Frequency	
Auto Tune	
Center Freq	5.795000000 GHz
Start Freq	5.755000000 GHz
Stop Freq	5.835000000 GHz
CF Step	8.0000000 MHz
Freq Offset	0 Hz
Scale Type	Log

CH159


CH159

4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

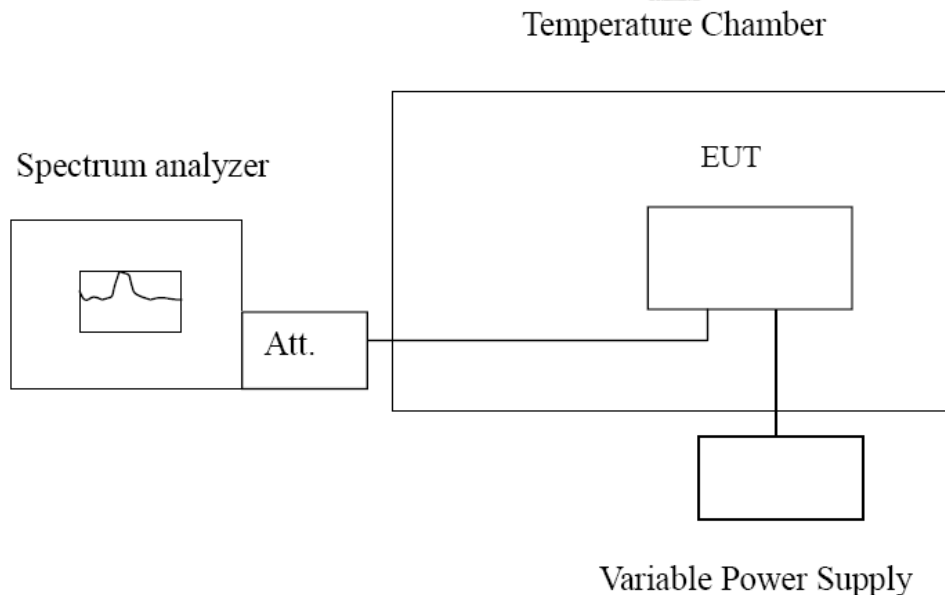

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.


TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.8	-30	110.30	0.021293	Within the band of operation	Pass
	-20	174.61	0.033708		
	-10	145.36	0.028062		
	0	146.68	0.028317		
	10	146.28	0.028239		
	20	99.84	0.019274		
	30	167.26	0.032290		
	40	129.53	0.025006		
DC 4.2	25	195.56	0.037753		
DC 3.4	25	118.62	0.022900		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.8	-30	135.86	0.023648	Within the band of operation	Pass
	-20	129.40	0.022524		
	-10	167.59	0.029171		
	0	169.66	0.029532		
	10	136.66	0.023788		
	20	144.77	0.025199		
	30	116.77	0.020326		
	40	168.56	0.029340		
DC 4.2	25	150.90	0.026266		
DC 3.4	25	129.55	0.022550		

5 Test Setup Photos of the EUT

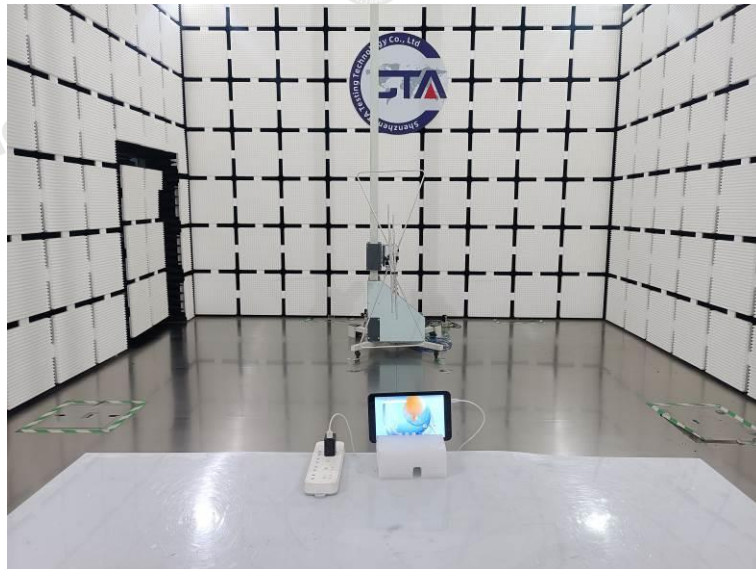

6 Photos of the EUT

Reference to the test report No. **CTA24031200101**.

***** End of Report *****