

# Tonal

REVISED TEST REPORT TO 110825-18

**Apollo Board, Model: 500-0806**  
**Trainer, Model: T2**

**Tested to The Following Standards:**

**FCC Part 15 Subpart E Section(s)**

**15.207 & 15.407**  
**(NII 5725 – 5850 MHz)**

**Report No.: 110825-18A**

**Date of issue: February 17, 2025**



**Test Certificate # 803.01**

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

This report contains a total of 76 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

## TABLE OF CONTENTS

|                                                                                     |    |
|-------------------------------------------------------------------------------------|----|
| Administrative Information .....                                                    | 3  |
| Test Report Information .....                                                       | 3  |
| Revision History .....                                                              | 3  |
| Report Authorization .....                                                          | 3  |
| Test Facility Information .....                                                     | 4  |
| Software Versions .....                                                             | 4  |
| Site Registration & Accreditation Information .....                                 | 4  |
| Summary of Results .....                                                            | 5  |
| Standard / Specification: FCC Part 15 Subpart E - 15.407 (NII 5725 – 5850 MHz)..... | 5  |
| Modifications During Testing.....                                                   | 5  |
| Conditions During Testing.....                                                      | 6  |
| Equipment Under Test (EUT) .....                                                    | 7  |
| General Product Information: .....                                                  | 8  |
| FCC Part 15 Subpart E .....                                                         | 11 |
| 15.407(a) Output Power .....                                                        | 11 |
| 15.407(a) Power Spectral Density .....                                              | 33 |
| 15.407(b) Radiated Emissions & Band Edge .....                                      | 54 |
| APPENDIX A: Modifications Made During Testing.....                                  | 74 |
| Supplemental Information.....                                                       | 75 |
| Measurement Uncertainty .....                                                       | 75 |
| Emissions Test Details.....                                                         | 75 |

## Administrative Information

### Test Report Information

**REPORT PREPARED FOR:**

Tonal  
69 Converse, Suite 200  
San Francisco, CA 94103

Representative: Lars Gilstrom  
Customer Reference Number: PO3317

**DATE OF EQUIPMENT RECEIPT:****DATE(S) OF TESTING:****REPORT PREPARED BY:**

Lisa Bevington  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Project Number: 110825

October 7, 2024

October 7-9, 2024

January 10, 13 & 15, 2025

### Revision History

**Original:** Testing of Testing of Apollo Board, Model: 500-0806 and Trainer, Model: T2 to FCC Part 15 Subpart E Section(s) 15.207 & 15.4.07 (NII 5725 - 5850 MHz).

**Revision A:** To replace correct plot to page 55 from page 61.

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink that reads "Steve Behm".

**Steve Behm**  
*Director of Quality Assurance & Engineering Services*  
*CKC Laboratories, Inc.*

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
110 North Olinda Place  
Brea, CA 92823

CKC Laboratories, Inc.  
1120 Fulton Place  
Fremont, CA 94539

## Software Versions

| CKC Laboratories Proprietary Software | Version |
|---------------------------------------|---------|
| EMITest Emissions                     | 5.03.20 |

## Site Registration & Accreditation Information

| Location                 | *NIST CB # | FCC    | Canada | Japan  |
|--------------------------|------------|--------|--------|--------|
| Canyon Park, Bothell, WA | US0103     | US1024 | 3082C  | A-0136 |
| Brea, CA                 | US0103     | US1024 | 3082D  | A-0136 |
| Fremont, CA              | US0103     | US1024 | 3082B  | A-0136 |
| Mariposa, CA             | US0103     | US1024 | 3082A  | A-0136 |

\*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

## Summary of Results

### Standard / Specification: FCC Part 15 Subpart E - 15.407 (NII 5725 – 5850 MHz)

| Test Procedure | Description                    | Modifications | Results |
|----------------|--------------------------------|---------------|---------|
| 15.407(e)      | 6dB Bandwidth                  | NA            | NA2     |
| 15.407(a)      | Output Power                   | NA            | Pass    |
| 15.407(a)      | Power Spectral Density         | NA            | Pass    |
| 15.407(b)      | Radiated Emissions & Band Edge | MOD1          | Pass    |
| 15.407(g)      | Frequency Stability            | NA            | NA1     |
| 15.207         | AC Conducted Emissions         | NA            | NA2     |

NA = Not Applicable

NA1 = In accordance with KDB 789033, this test is not required.

NA2 = Not applicable for PCII, only relevant sections were tested/recalculate.

#### ISO/IEC 17025 Decision Rule

The equipment sample utilized for testing is selected by the manufacturer. The declaration of pass or fail herein is a binary statement for simple acceptance rule (ILAC G8) based upon assessment to the specification(s) listed above, without consideration of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

## Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

| Summary of Conditions                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Modification 1 (MOD1) = Reduce RF output power to 12dBm in the software for 802.11n HT40 Chain 0<br>Added a ferrite (Würth: 742 712 21) on lower resistor wire<br>Green Resistor |

**Modifications listed above must be incorporated into all production units.**

## Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

| Summary of Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Condition #1</p> <p>Evaluation for PCII, with MIMO enabled. Conducted power and Conducted PSD were calculated from original testing. Radiated emissions were re-measured.</p> <p>The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on.</p> <p>WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14dBm.</p> <p>Worst case tested:</p> <p>802.11a 18Mbit/s</p> <p>802.11n HT20 MSC2</p> <p>802,11n HT40 MSC0</p> <p>802.11ac VHT20 MSC2</p> <p>802.11ac VHT40 MSC0</p> <p>802.11ac VHT80 MSC1</p> |

## Equipment Under Test (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration A

#### *Equipment Under Test (\* = EUT):*

| Device Name  | Manufacturer | Model #  | S/N             |
|--------------|--------------|----------|-----------------|
| Apollo Board | Tonal System | 500-0806 | 080600030001263 |

#### *Support Devices:*

| Device Name              | Manufacturer  | Model #    | S/N                                  |
|--------------------------|---------------|------------|--------------------------------------|
| MCB Board                | Tonal Systems | 500-0131   | 500-0131_rev003_00001286_20240909_17 |
| Laptop                   | Dell          | XPS        | 22E00911                             |
| AC/DC Adapter for Laptop | Dell          | DA130PM130 | CN-06TTY6-48661-4CO-27M7-A00         |

### Configuration 1

#### *Equipment Under Test (\* = EUT):*

| Device Name | Manufacturer | Model # | S/N     |
|-------------|--------------|---------|---------|
| Trainer     | Tonal System | T2      | 4000055 |


#### *Support Devices:*

| Device Name              | Manufacturer | Model #    | S/N                          |
|--------------------------|--------------|------------|------------------------------|
| Laptop                   | Dell         | XPS        | 22E00911                     |
| AC/DC Adapter for Laptop | Dell         | DA130PM130 | CN-06TTY6-48661-4CO-27M7-A00 |

## General Product Information:

| Description of EUT                                                                                                                      |                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Exercise Trainer                                                                                                                        |                                                                                                                                                                                                                                                                                         |
| Product Information                                                                                                                     | Manufacturer-Provided Details                                                                                                                                                                                                                                                           |
| Operating Frequencies Tested:                                                                                                           | 5745-5825MHz                                                                                                                                                                                                                                                                            |
| Equipment Type:                                                                                                                         | Stand-Alone Equipment                                                                                                                                                                                                                                                                   |
| Type of Wideband System:                                                                                                                | 802.11                                                                                                                                                                                                                                                                                  |
| Maximum Duty Cycle:                                                                                                                     | 100%                                                                                                                                                                                                                                                                                    |
| Modulation Type(s):                                                                                                                     | 802.11a (BPSK, QPSK, 16QAM, 64QAM)<br>802.11n HT20 (BPSK, QPSK, 16QAM, 64QAM)<br>802.11n HT40 (BPSK, QPSK, 16QAM, 64QAM)<br>802.11ac VHT20 (BPSK, QPSK, 16QAM, 64QAM, 256QAM)<br>802.11ac VHT40 (BPSK, QPSK, 16QAM, 64QAM, 256QAM)<br>802.11ac VHT80 (BPSK, QPSK, 16QAM, 64QAM, 256QAM) |
| Number of TX Chains:                                                                                                                    | 2<br>Note: The manufacturer declared MIMO is enabled.                                                                                                                                                                                                                                   |
| Beamforming Type:                                                                                                                       | NA                                                                                                                                                                                                                                                                                      |
| Antenna Type(s) and Gain:                                                                                                               | External/4.66dBi                                                                                                                                                                                                                                                                        |
| Antenna Connection Type:                                                                                                                | External Connector                                                                                                                                                                                                                                                                      |
| Nominal Input Voltage:                                                                                                                  | 12VDC                                                                                                                                                                                                                                                                                   |
| Firmware / Software Version(s):                                                                                                         | QRCT (Qualcomm Radio Control Toolkit) Version 4.1                                                                                                                                                                                                                                       |
| Firmware / Software Description:                                                                                                        | Using C-Prompt and QRCT application to control all modulation types and frequencies to continuously transmit or receive as intended                                                                                                                                                     |
| Firmware / Software Setting(s):                                                                                                         | NA                                                                                                                                                                                                                                                                                      |
| Tune-up or Adjustment(s):                                                                                                               | NA                                                                                                                                                                                                                                                                                      |
| Declared Operational Configuration:                                                                                                     | <input type="checkbox"/> Indoor Access Point<br><input type="checkbox"/> Outdoor Access Point<br><input checked="" type="checkbox"/> Indoor Client<br><input type="checkbox"/> Outdoor Client<br><input type="checkbox"/> Outdoor Fixed Equipment                                       |
| The validity of results is dependent on the stated product details, the accuracy of which the manufacturer assumes full responsibility. |                                                                                                                                                                                                                                                                                         |

**EUT and Accessory Photo(s)**

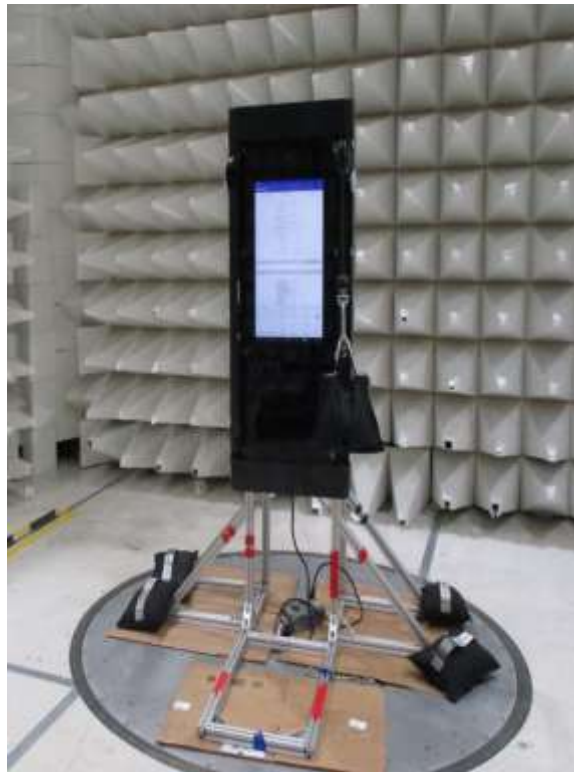

EUT

**Support Equipment Photo(s)**




Laptop


### Block Diagram of Test Setup(s)

| Configuration# | Setup Description of Block Diagram                                                                                                                                                                                                                                                                               |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A<br>&<br>1    | <p>Radiated Measurement: The Antenna is set up at 3 meter distance from the EUT according to ANSI C63.10 2020. The EUT is set up and operated as intended.</p> <p>Conducted Measurement: The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.</p> |

#### Radiated Method Setup

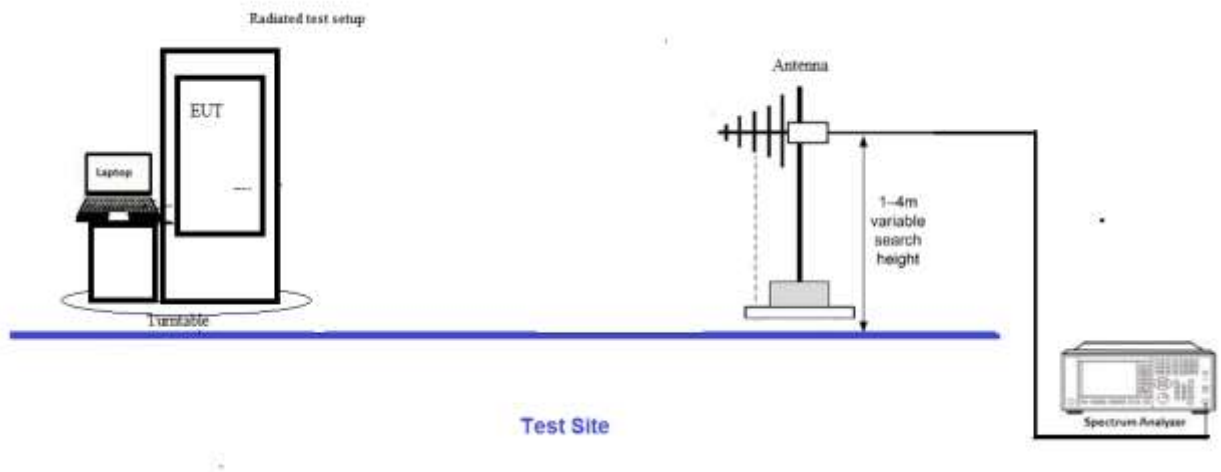

#### Conducted Method Setup

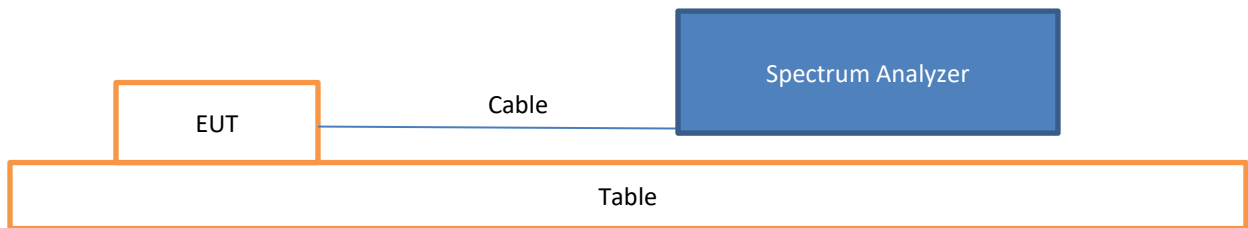

## FCC Part 15 Subpart E

### 15.407(a) Output Power

| Test Setup/Conditions – RF Conducted Measurement |                                                                                                                     |                |                                 |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|----------------|---------------------------------|
| Test Location:                                   | Fremont Lab Bench                                                                                                   | Test Engineer: | Hieu Song Nguyenpham<br>E. Wong |
| Test Method:                                     | ANSI C63.10 (2020), KDB 789033<br>662911 D01 Multiple Transmitter<br>Output v02r01                                  | Test Date(s):  | 10/07-09/2024                   |
| Configuration:                                   | A                                                                                                                   |                |                                 |
| Test Setup:                                      | The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer. |                |                                 |

| Environmental Conditions |           |                        |       |
|--------------------------|-----------|------------------------|-------|
| Temperature (°C)         | 21.2-23.7 | Relative Humidity (%): | 39-45 |

| Test Equipment |                   |              |                    |           |           |
|----------------|-------------------|--------------|--------------------|-----------|-----------|
| Asset#         | Description       | Manufacturer | Model              | Cal Date  | Cal Due   |
| 03013          | Cable             | Astrolab     | 32022-2-2909K-36TC | 1/9/2024  | 1/9/2026  |
| P07365         | Attenuator        | Weinschel    | 54A-10             | 5/26/2023 | 5/26/2025 |
| 03471          | Spectrum Analyzer | Agilent      | E4440A             | 2/23/2024 | 2/23/2026 |

| Test Data Summary - Voltage Variations |                       |                            |                            |                            |                                              |
|----------------------------------------|-----------------------|----------------------------|----------------------------|----------------------------|----------------------------------------------|
| Frequency (MHz)                        | Modulation / Ant Port | V <sub>Minimum</sub> (dBm) | V <sub>Nominal</sub> (dBm) | V <sub>Maximum</sub> (dBm) | Max Deviation from V <sub>Nominal</sub> (dB) |
| 5745                                   | 802.11a/1             | 13.02                      | 13.03                      | 13.03                      | 0.01                                         |
| 5785                                   | 802.11a/1             | 12.60                      | 12.58                      | 12.59                      | 0.02                                         |
| 5825                                   | 802.11a/1             | 12.11                      | 12.11                      | 12.12                      | 0.01                                         |

Test performed using operational mode with the highest output power, representing worst case.

#### **Parameter Definitions:**

Measurements performed at input voltage V<sub>Nominal</sub> ± 15%.

| Parameter              | Value   |
|------------------------|---------|
| V <sub>Nominal</sub> : | 12VDC   |
| V <sub>Minimum</sub> : | 10.2VDC |
| V <sub>Maximum</sub> : | 13.8VDC |

| Test Data Summary - RF Conducted Measurement- Chain 0 |                |                        |                    |       |            |       |         |
|-------------------------------------------------------|----------------|------------------------|--------------------|-------|------------|-------|---------|
| Measurement Option: AVGSA-1                           |                |                        |                    |       |            |       |         |
| Frequency (MHz)                                       | Modulation     | Ant. Type / Gain (dBi) | RF Conducted (dBm) |       | EIRP (dBm) |       | Results |
|                                                       |                |                        | Measured           | Limit | Calculated | Limit |         |
| 5745                                                  | 802.11a        | External/4.66          | 9.52               | ≤30   | 13.91      | ≤36   | Pass    |
| 5785                                                  | 802.11a        | External/4.66          | 9.27               | ≤30   | 13.93      | ≤36   | Pass    |
| 5825                                                  | 802.11a        | External/4.66          | 8.26               | ≤30   | 12.92      | ≤36   | Pass    |
| 5745                                                  | 802.11n HT20   | External/4.66          | 8.50               | ≤30   | 13.16      | ≤36   | Pass    |
| 5785                                                  | 802.11n HT20   | External/4.66          | 8.16               | ≤30   | 12.82      | ≤36   | Pass    |
| 5825                                                  | 802.11n HT20   | External/4.66          | 8.10               | ≤30   | 12.76      | ≤36   | Pass    |
| 5745                                                  | 802.11ac 20MHz | External/4.66          | 8.30               | ≤30   | 12.96      | ≤36   | Pass    |
| 5785                                                  | 802.11ac 20MHz | External/4.66          | 7.92               | ≤30   | 12.58      | ≤36   | Pass    |
| 5825                                                  | 802.11ac 20MHz | External/4.66          | 7.89               | ≤30   | 12.55      | ≤36   | Pass    |
| 5755                                                  | 802.11n HT40   | External/4.66          | 8.14               | ≤30   | 12.8       | ≤36   | Pass    |
| 5795                                                  | 802.11n HT40   | External/4.66          | 8.12               | ≤30   | 12.78      | ≤36   | Pass    |
| 5755                                                  | 802.11ac 40MHz | External/4.66          | 8.12               | ≤30   | 12.78      | ≤36   | Pass    |
| 5795                                                  | 802.11ac 40MHz | External/4.66          | 8.19               | ≤30   | 12.85      | ≤36   | Pass    |
| 5775                                                  | 802.11ac 80MHz | External/4.66          | 6.51               | ≤30   | 11.17      | ≤36   | Pass    |

| Test Data Summary - RF Conducted Measurement- Chain 1 |                |                        |                    |       |            |       |         |
|-------------------------------------------------------|----------------|------------------------|--------------------|-------|------------|-------|---------|
| Measurement Option: AVGSA-1                           |                |                        |                    |       |            |       |         |
| Frequency (MHz)                                       | Modulation     | Ant. Type / Gain (dBi) | RF Conducted (dBm) |       | EIRP (dBm) |       | Results |
|                                                       |                |                        | Measured           | Limit | Calculated | Limit |         |
| 5745                                                  | 802.11a        | External/4.66          | 10.47              | ≤30   | 15.13      | ≤36   | Pass    |
| 5785                                                  | 802.11a        | External/4.66          | 9.85               | ≤30   | 14.51      | ≤36   | Pass    |
| 5825                                                  | 802.11a        | External/4.66          | 9.81               | ≤30   | 14.47      | ≤36   | Pass    |
| 5745                                                  | 802.11n HT20   | External/4.66          | 10.10              | ≤30   | 14.76      | ≤36   | Pass    |
| 5785                                                  | 802.11n HT20   | External/4.66          | 9.44               | ≤30   | 14.1       | ≤36   | Pass    |
| 5825                                                  | 802.11n HT20   | External/4.66          | 9.50               | ≤30   | 14.16      | ≤36   | Pass    |
| 5745                                                  | 802.11ac 20MHz | External/4.66          | 10.13              | ≤30   | 14.79      | ≤36   | Pass    |
| 5785                                                  | 802.11ac 20MHz | External/4.66          | 9.81               | ≤30   | 14.47      | ≤36   | Pass    |
| 5825                                                  | 802.11ac 20MHz | External/4.66          | 9.65               | ≤30   | 14.31      | ≤36   | Pass    |
| 5755                                                  | 802.11n HT40   | External/4.66          | 10.12              | ≤30   | 14.78      | ≤36   | Pass    |
| 5795                                                  | 802.11n HT40   | External/4.66          | 9.92               | ≤30   | 14.58      | ≤36   | Pass    |
| 5755                                                  | 802.11ac 40MHz | External/4.66          | 10.11              | ≤30   | 14.77      | ≤36   | Pass    |
| 5795                                                  | 802.11ac 40MHz | External/4.66          | 9.86               | ≤30   | 14.52      | ≤36   | Pass    |
| 5775                                                  | 802.11ac 80MHz | External/4.66          | 9.56               | ≤30   | 14.22      | ≤36   | Pass    |

EIRP is calculated as RF conducted power (dBm) + antenna gain (dBi)

For equipment using antennas other than in fixed point-to-point applications, the limit is calculated in accordance with 15.407(a)(3):

$$\text{Limit} = 30 - \text{Roundup}(G - 6)$$

For equipment using antennas in fixed point-to-point applications, the limit is calculated in accordance with 15.407(a)(3):

*Limit* = 30

| Test Data Summary - RF Conducted Measurement ( MIMO Total Power) |                |                  |       |            |       |                          |       |                  |       |         |
|------------------------------------------------------------------|----------------|------------------|-------|------------|-------|--------------------------|-------|------------------|-------|---------|
| Measurement Option: AVGSA-1                                      |                |                  |       |            |       |                          |       |                  |       |         |
| Frequency (MHz)                                                  | Modulation     | Cond Power (dBm) |       | EIRP (dBm) |       | Total RF Conducted (dBm) |       | Total EIRP (dBm) |       | Results |
|                                                                  |                | Ch0              | Ch1   | Ch0        | Ch1   | Measured                 | Limit | Calculated       | Limit |         |
| 5745                                                             | 802.11a        | 9.52             | 10.47 | 13.91      | 15.13 | 13.03                    | ≤30   | 17.57            | ≤36   | Pass    |
| 5785                                                             | 802.11a        | 9.27             | 9.85  | 13.93      | 14.51 | 12.58                    | ≤30   | 17.24            | ≤36   | Pass    |
| 5825                                                             | 802.11a        | 8.26             | 9.81  | 12.92      | 14.47 | 12.11                    | ≤30   | 16.77            | ≤36   | Pass    |
| 5745                                                             | 802.11n HT20   | 8.5              | 10.1  | 13.16      | 14.76 | 12.38                    | ≤30   | 17.04            | ≤36   | Pass    |
| 5785                                                             | 802.11n HT20   | 8.16             | 9.44  | 12.82      | 14.1  | 11.86                    | ≤30   | 16.52            | ≤36   | Pass    |
| 5825                                                             | 802.11n HT20   | 8.1              | 9.5   | 12.76      | 14.16 | 11.87                    | ≤30   | 16.53            | ≤36   | Pass    |
| 5745                                                             | 802.11ac 20MHz | 8.3              | 10.13 | 12.96      | 14.79 | 12.32                    | ≤30   | 16.98            | ≤36   | Pass    |
| 5785                                                             | 802.11ac 20MHz | 7.92             | 9.81  | 12.58      | 14.47 | 11.98                    | ≤30   | 16.64            | ≤36   | Pass    |
| 5825                                                             | 802.11ac 20MHz | 7.89             | 9.65  | 12.55      | 14.31 | 11.87                    | ≤30   | 16.53            | ≤36   | Pass    |
| 5755                                                             | 802.11n HT40   | 8.14             | 10.12 | 12.8       | 14.78 | 12.25                    | ≤30   | 16.91            | ≤36   | Pass    |
| 5795                                                             | 802.11n HT40   | 8.12             | 9.92  | 12.78      | 14.58 | 12.12                    | ≤30   | 16.78            | ≤36   | Pass    |
| 5755                                                             | 802.11ac 40MHz | 8.12             | 10.11 | 12.78      | 14.77 | 12.24                    | ≤30   | 16.90            | ≤36   | Pass    |
| 5795                                                             | 802.11ac 40MHz | 8.19             | 9.86  | 12.85      | 14.52 | 12.12                    | ≤30   | 16.78            | ≤36   | Pass    |
| 5775                                                             | 802.11ac 80MHz | 6.51             | 9.56  | 11.17      | 14.22 | 11.31                    | ≤30   | 15.97            | ≤36   | Pass    |

Antenna gain =4.66dBi

Ch0=Chain0


Ch1=Chain1

662911 D01 Multiple Transmitter Output v02r01 E 1) In-Band Power Measurements The measure-and-sum technique shall be used for measuring in-band transmit power of a device. Total power is the sum of the conducted power levels measured at the various output ports


EIRP is calculated as RF conducted power (dBm) + antenna gain (dBi)

## Plot(s)


### Chain 0

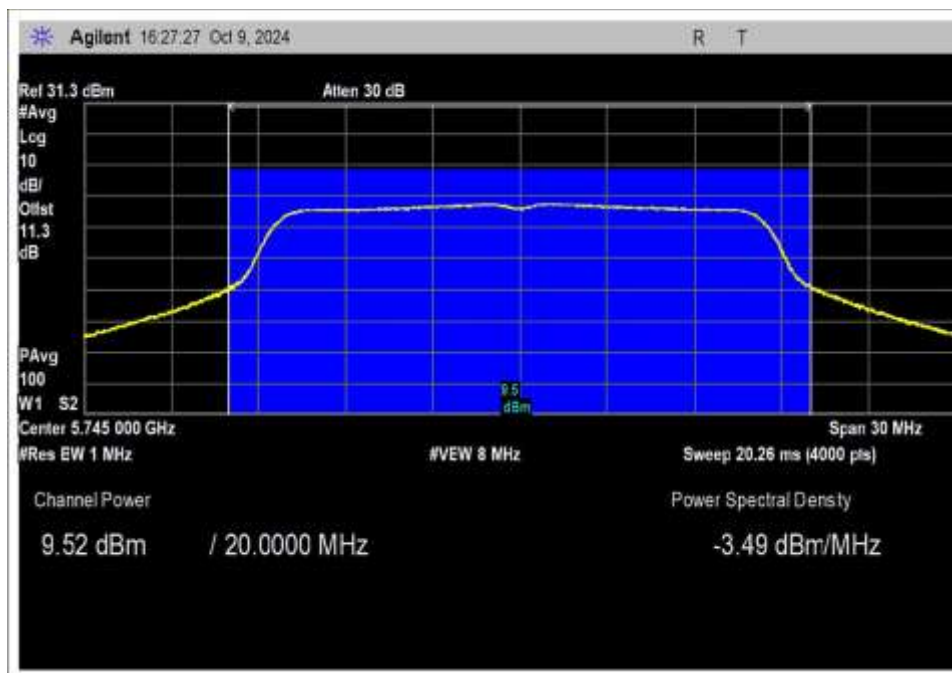


OFDM, Low Channel

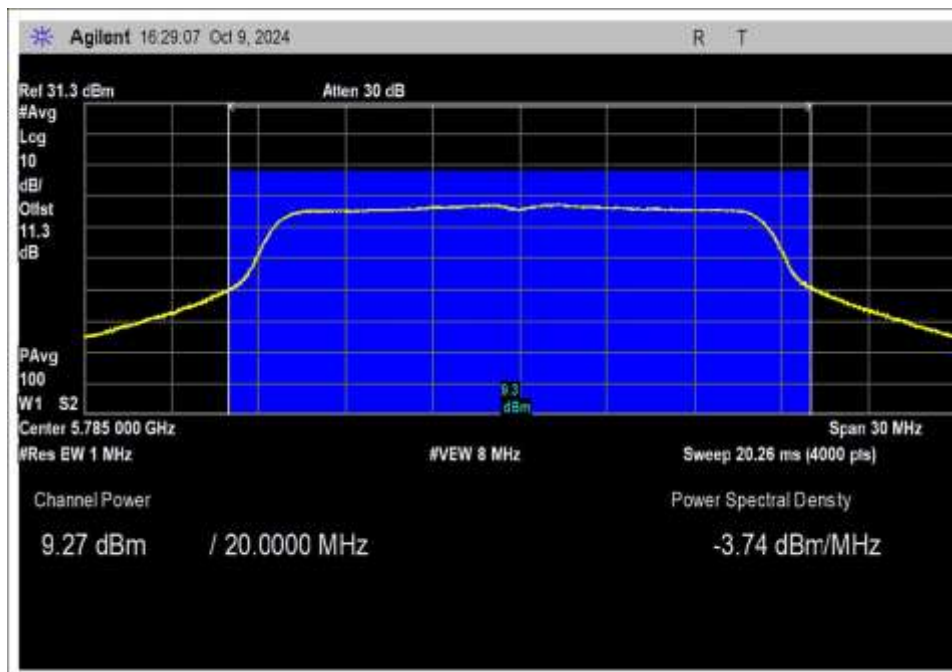


OFDM, Middle Channel

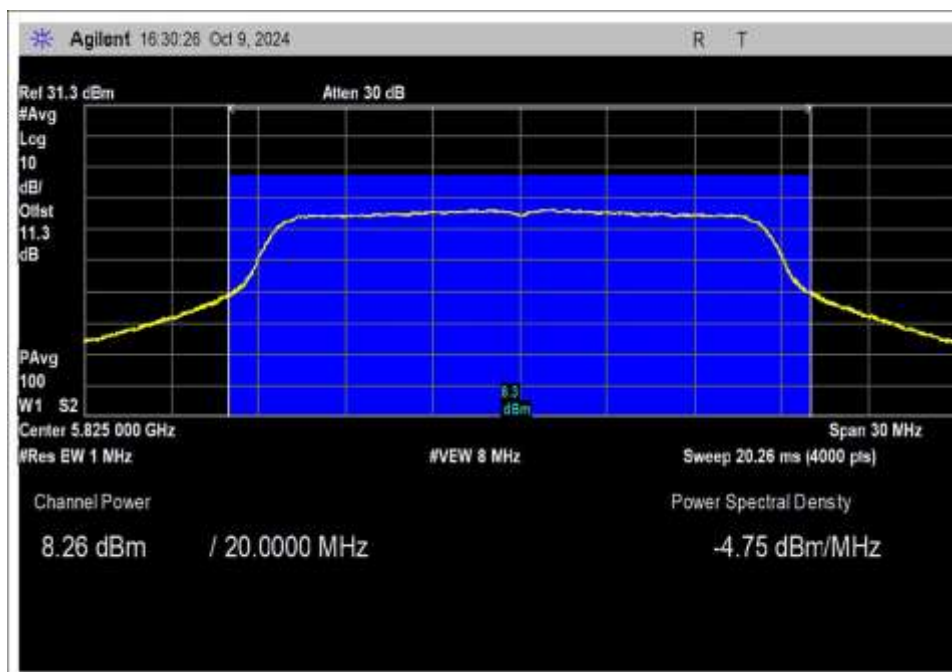


OFDM, High Channel

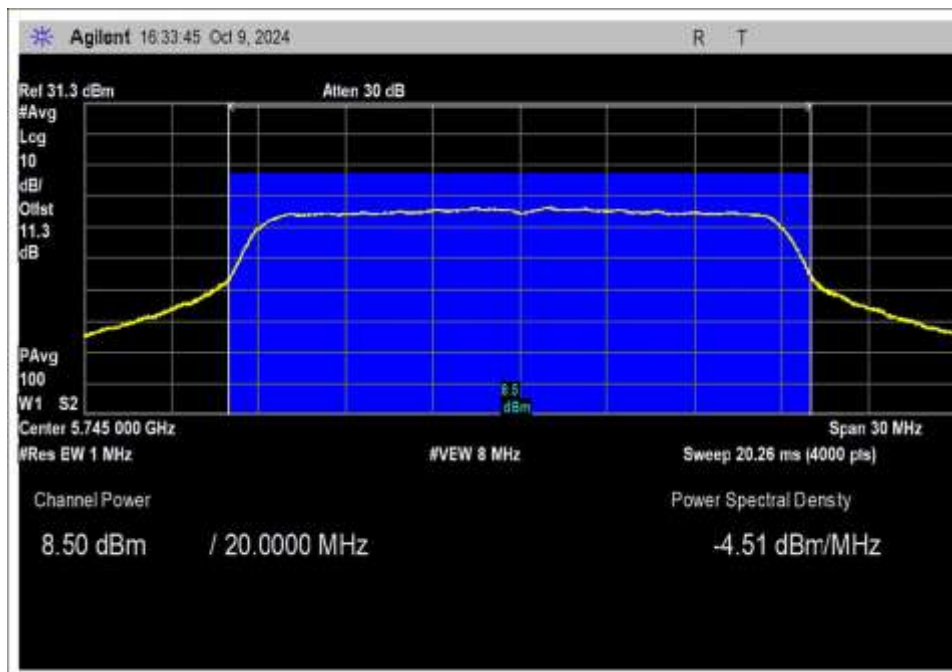


802.11n HT20, Low Channel

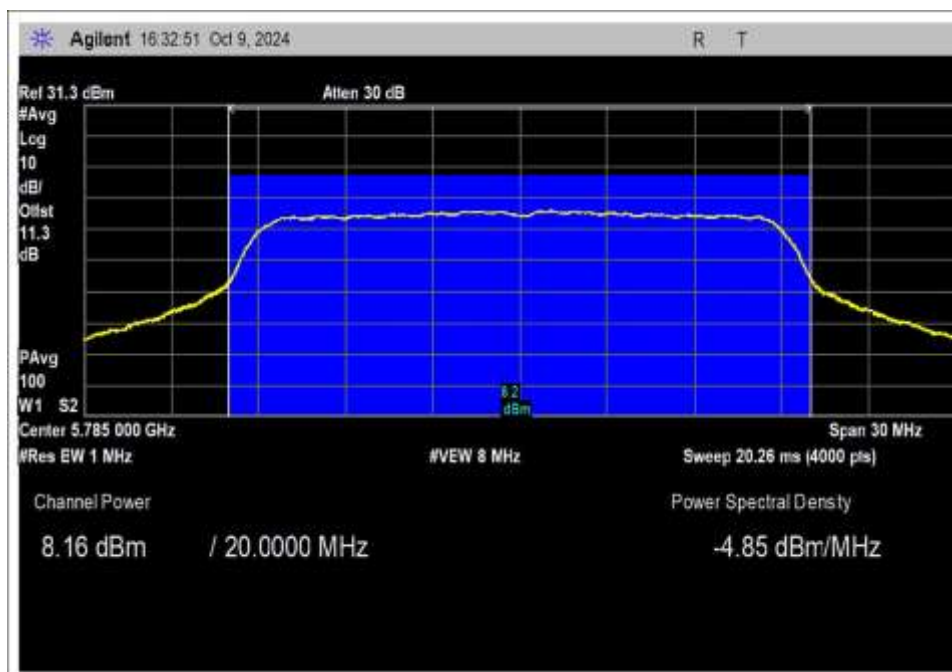


802.11n HT20, Middle Channel

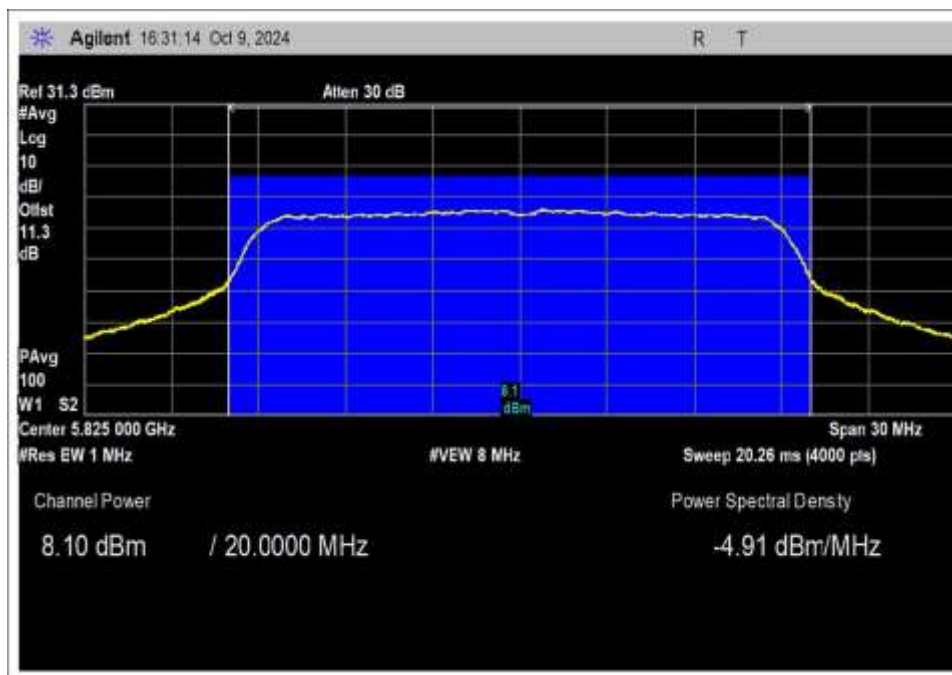


802.11n HT20, High Channel

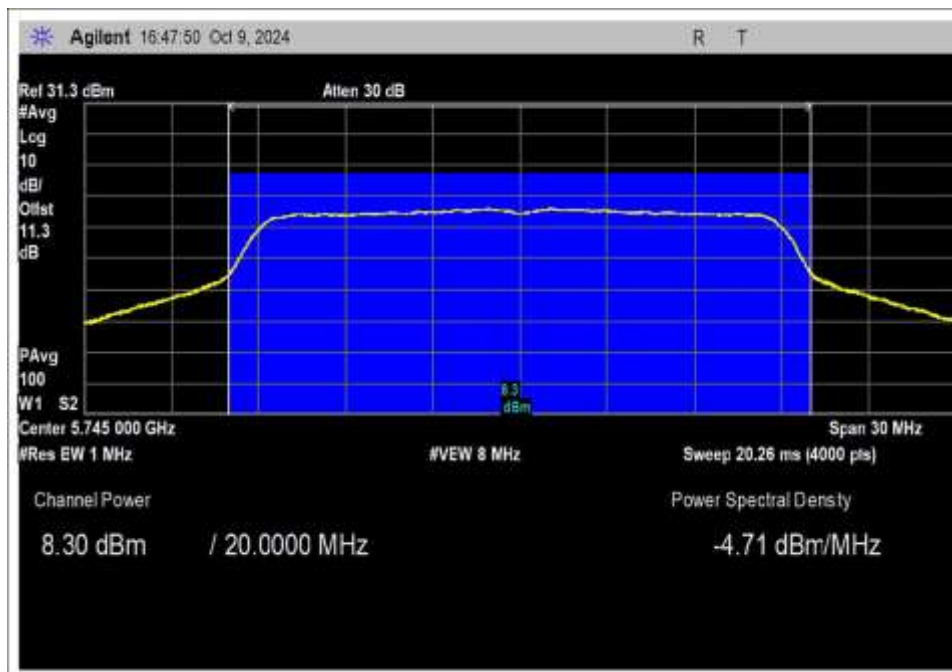


802.11ac 20MHz, Low Channel

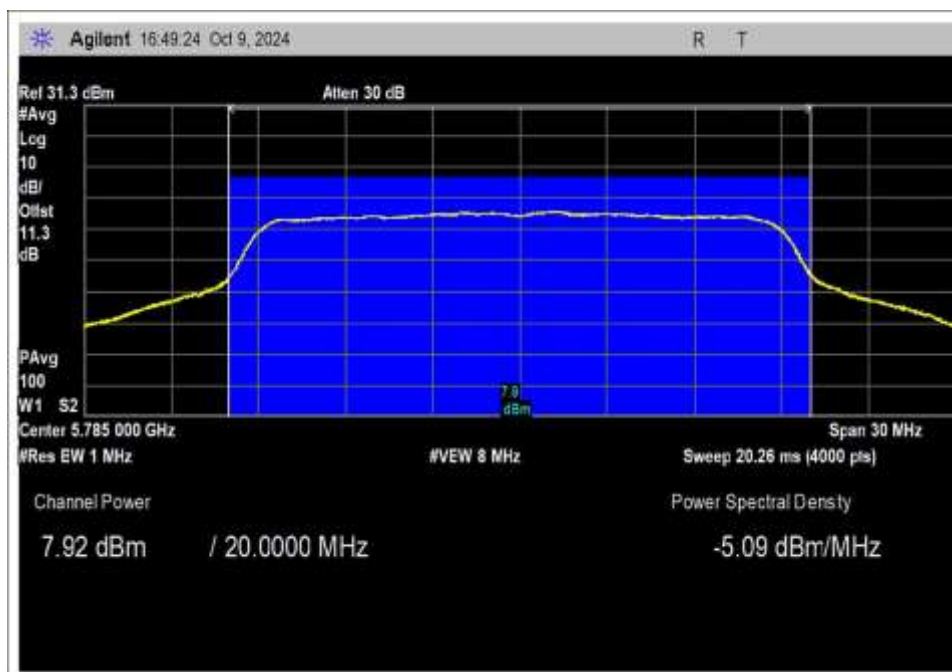


802.11ac 20MHz, Middle Channel

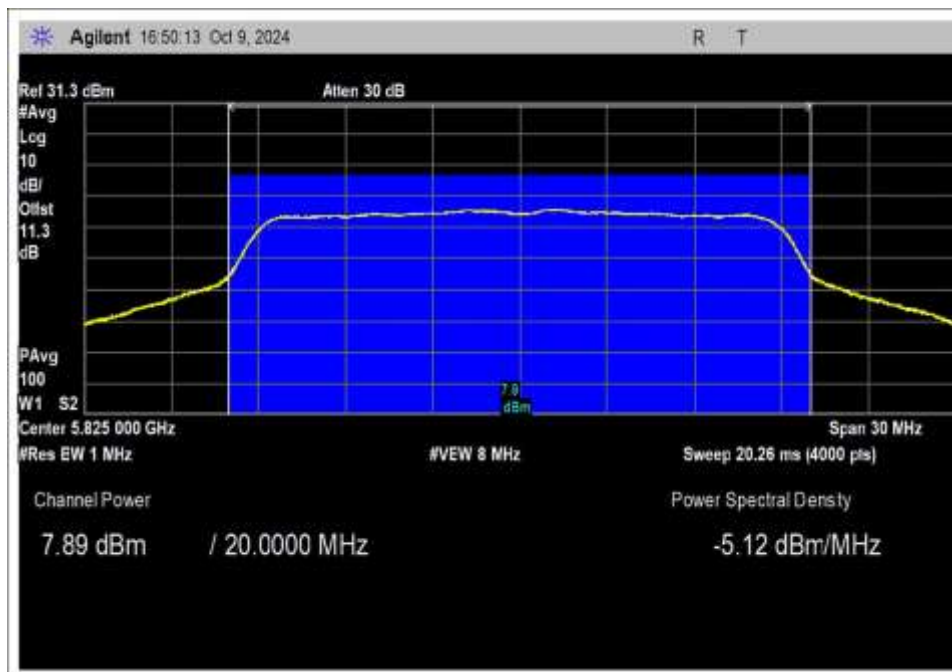


802.11ac 20MHz, High Channel

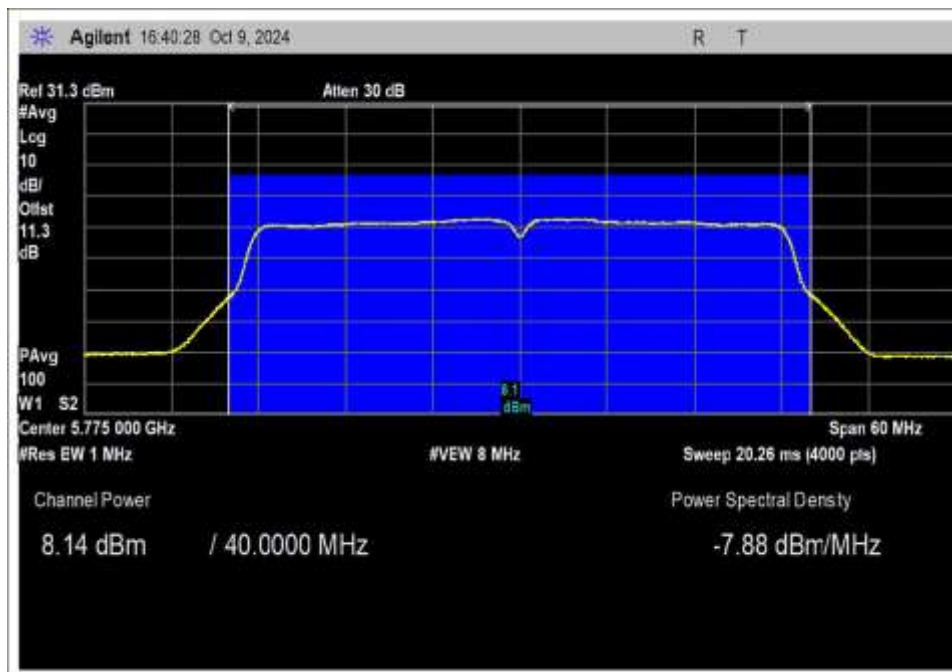


802.11n HT40, Low Channel

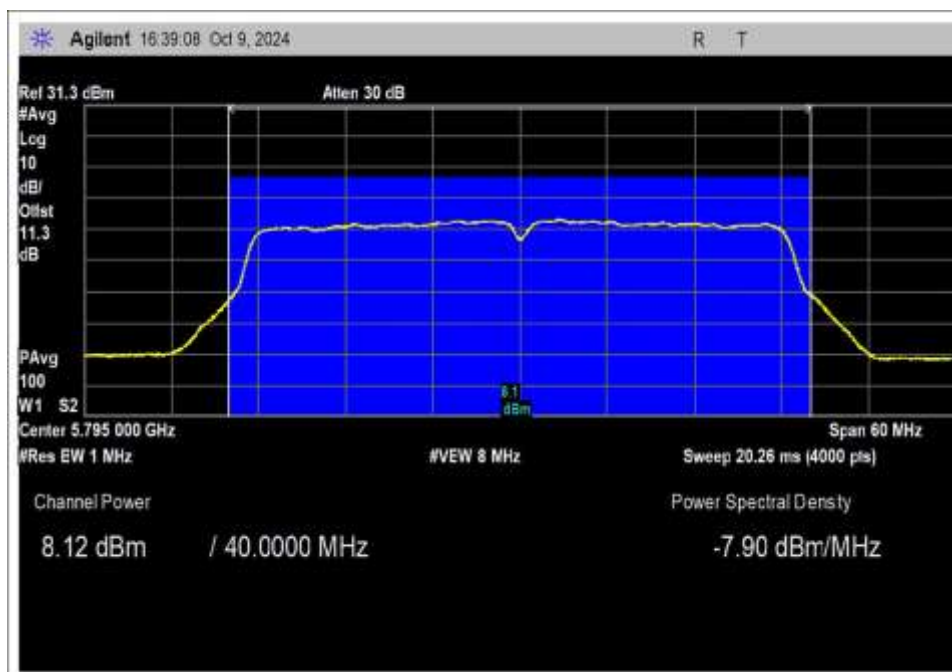


802.11n HT40, High Channel

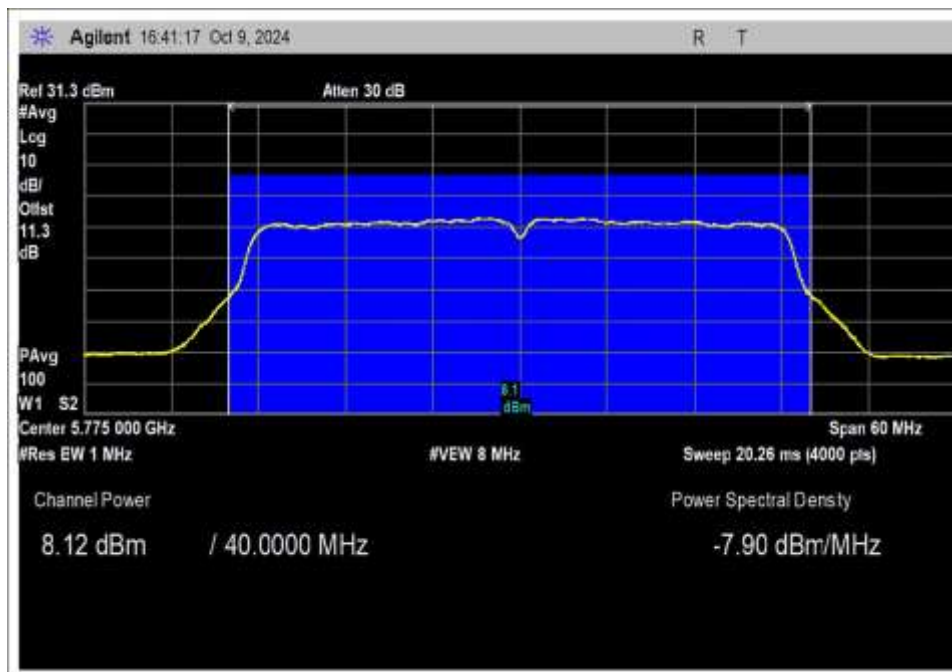

802.11ac 40MHz, Low Channel

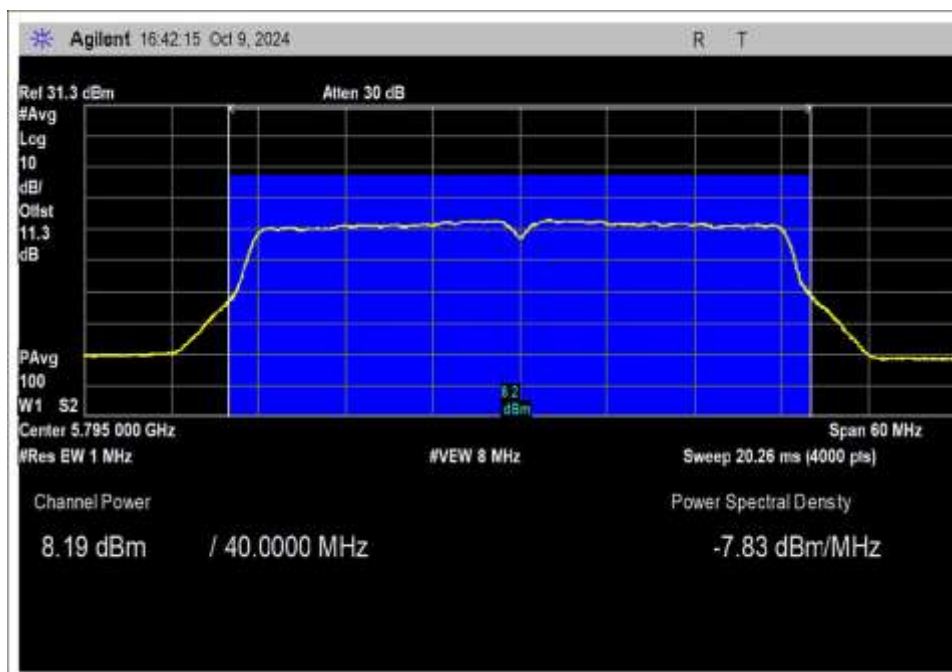


802.11ac 40MHz, High Channel

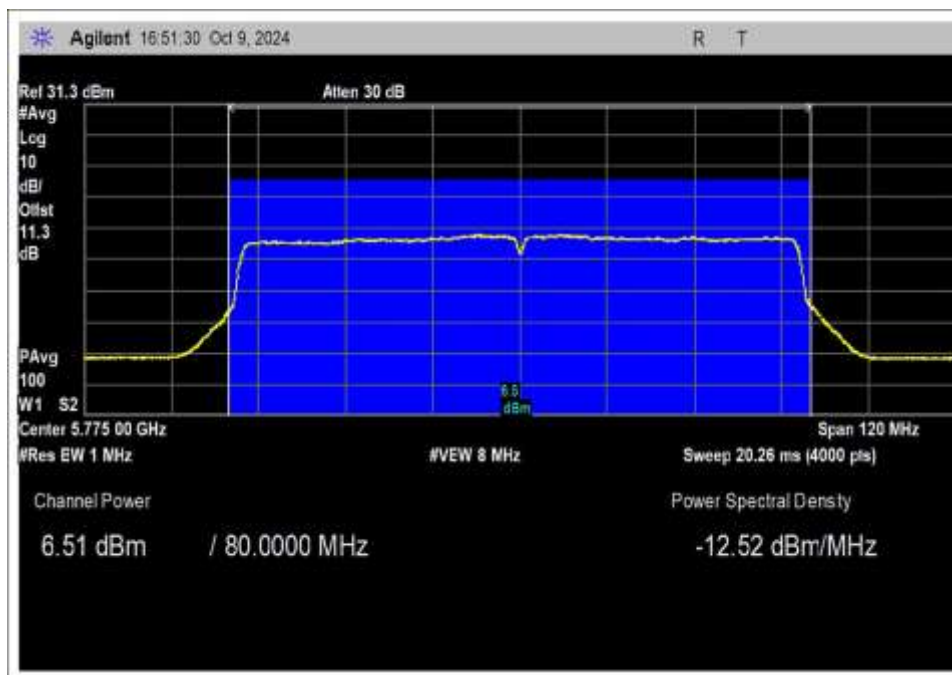


802.11ac 80MHz


Chain 1

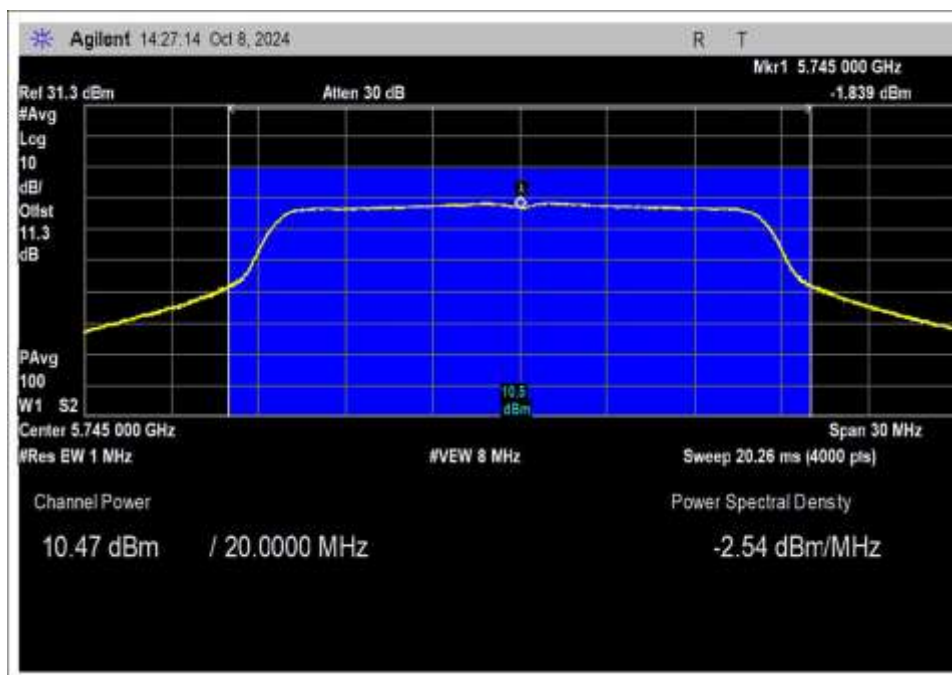


OFDM, Low Channel

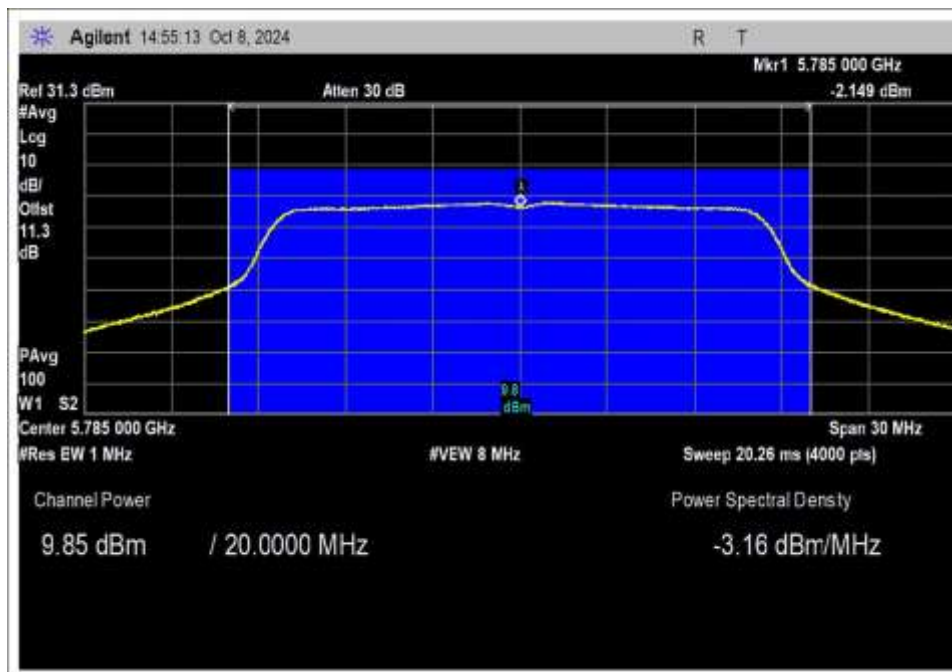


OFDM, Middle Channel

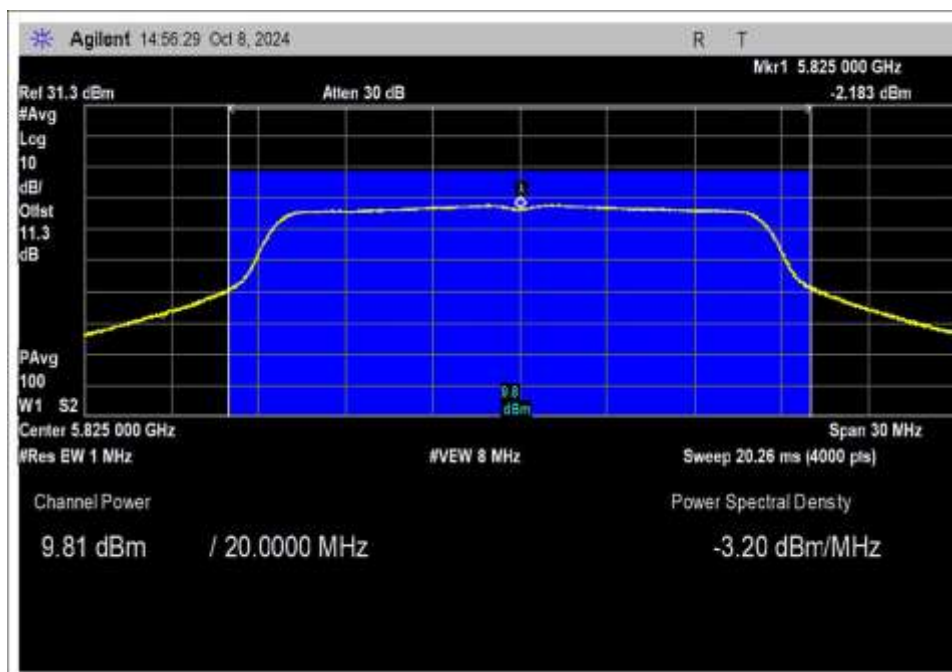


OFDM, High Channel

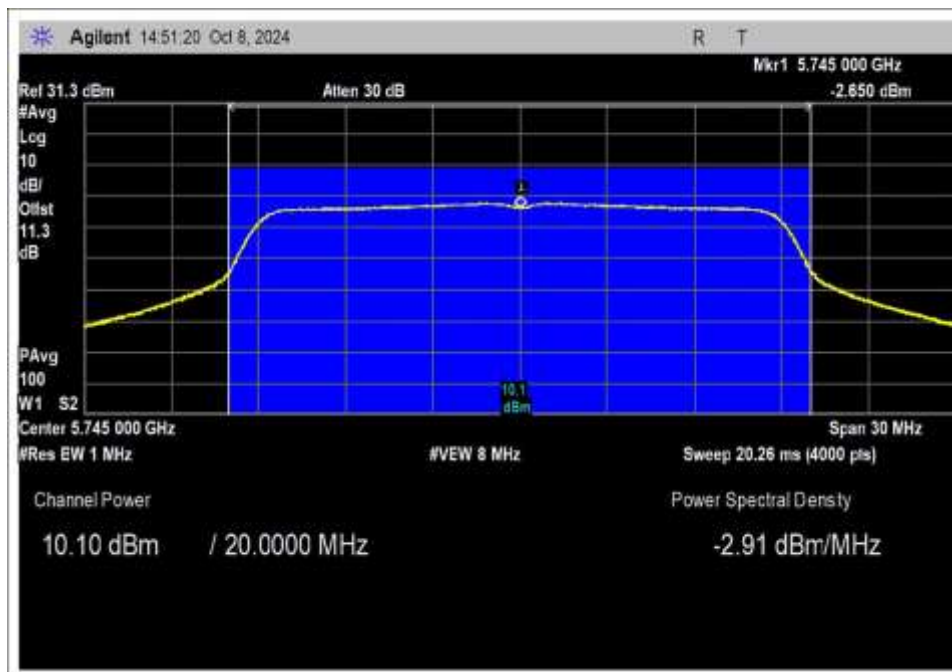


802.11n HT20, Low Channel

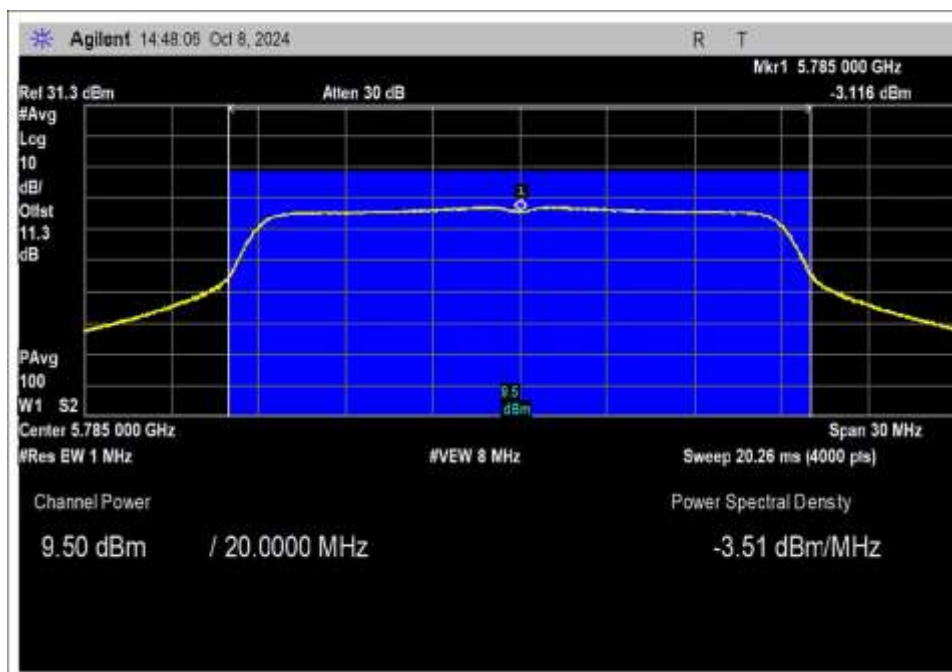


802.11n HT20, Middle Channel

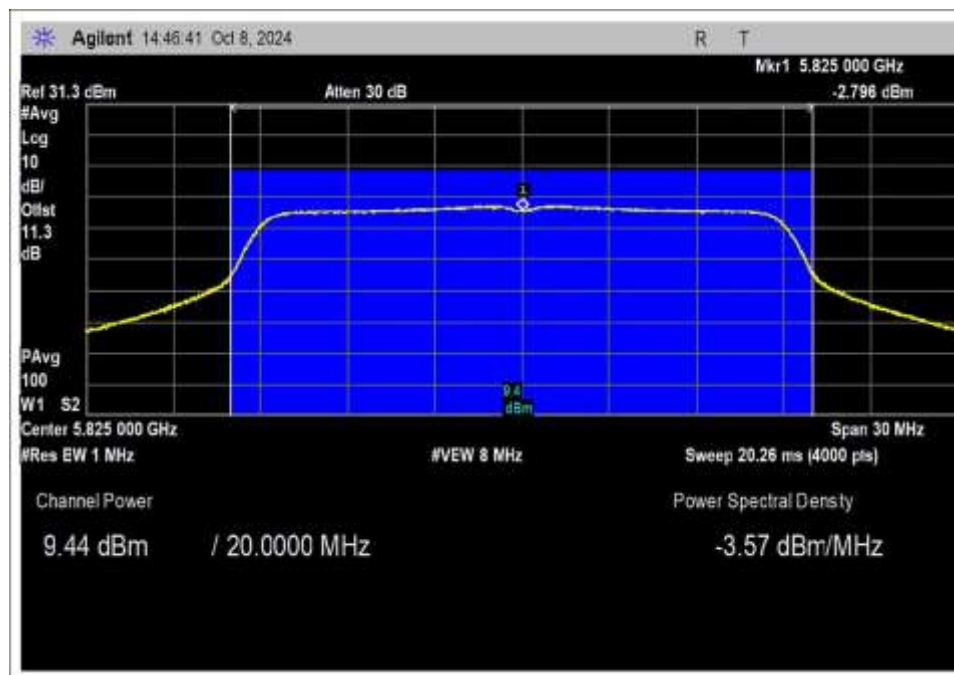


802.11n HT20, High Channel

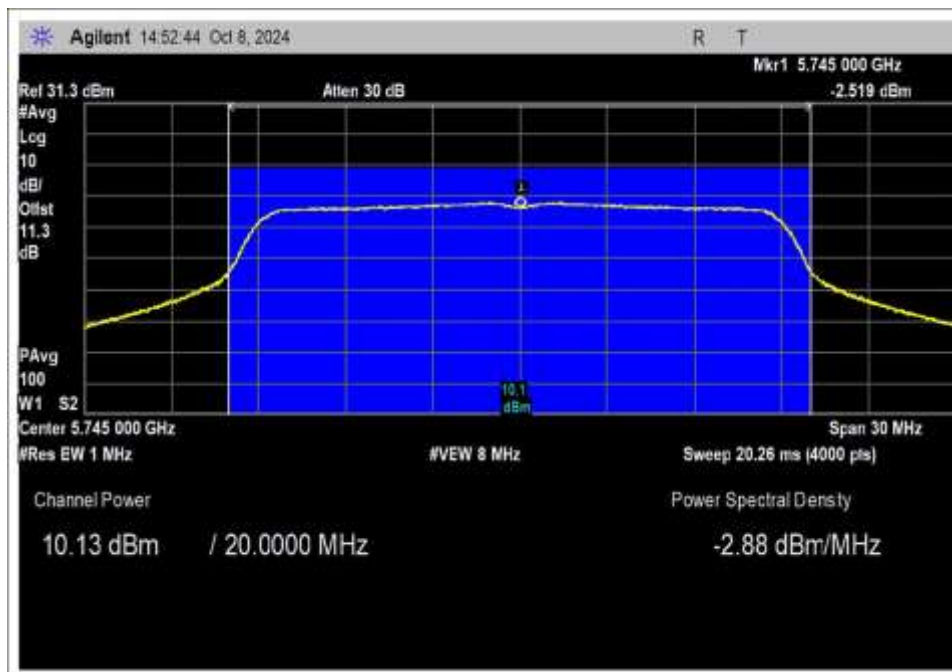


802.11ac 20MHz, Low Channel

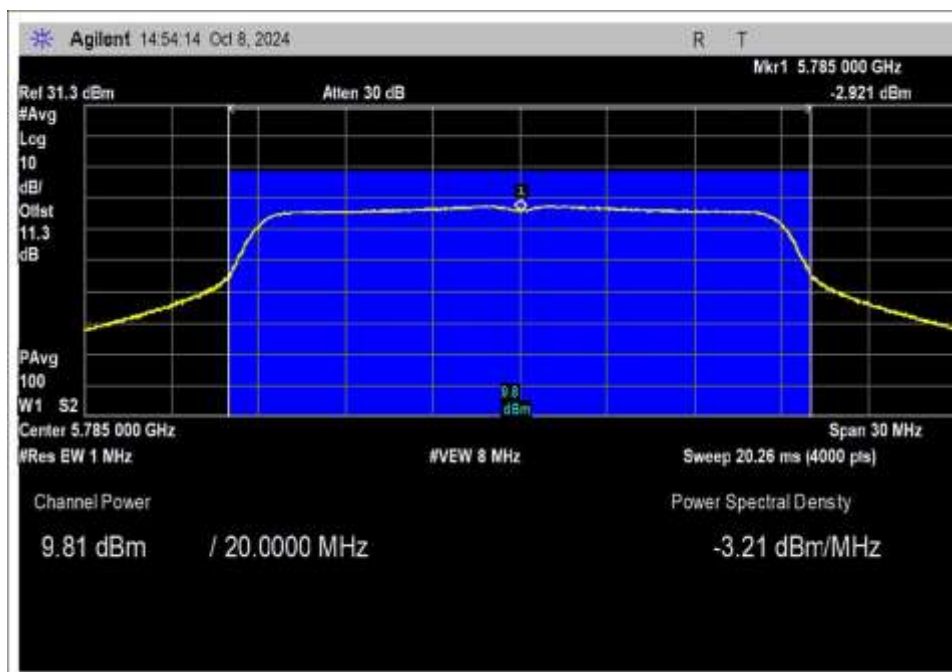


802.11ac 20MHz, Middle Channel

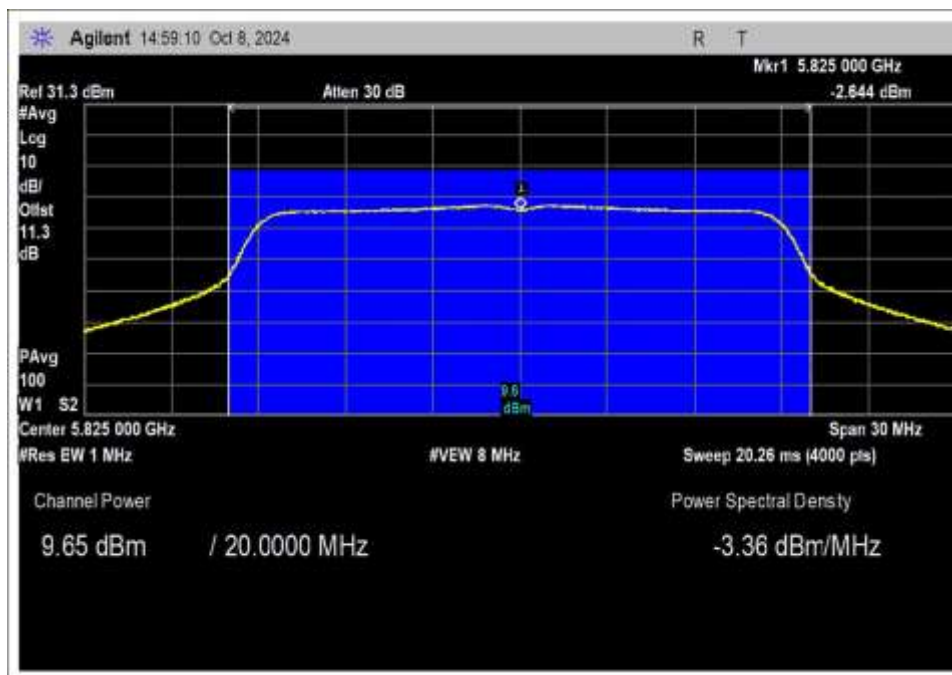


802.11ac 20MHz, High Channel

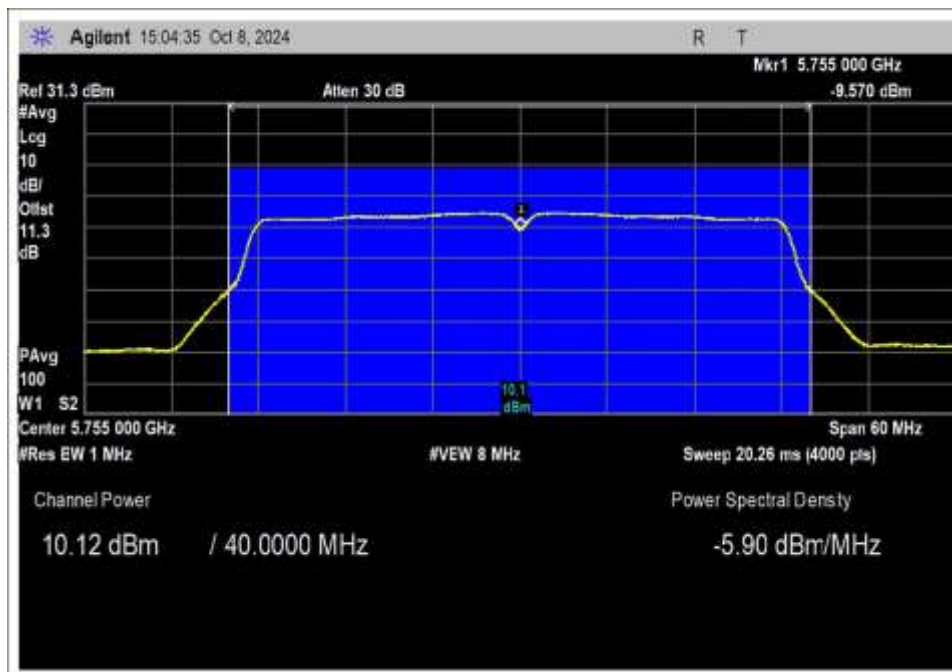


802.11n HT40, Low Channel

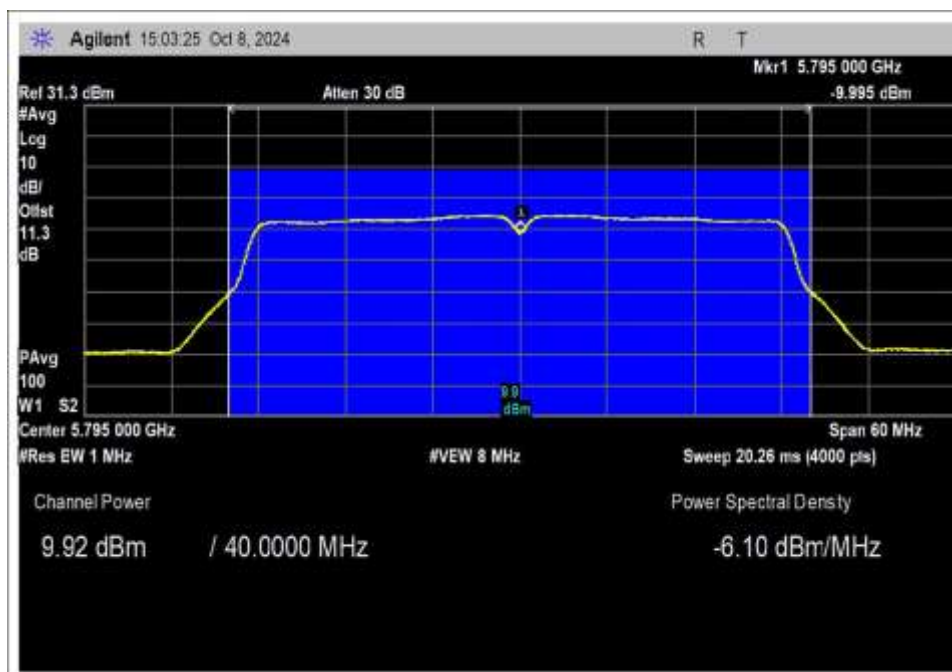


802.11n HT40, High Channel

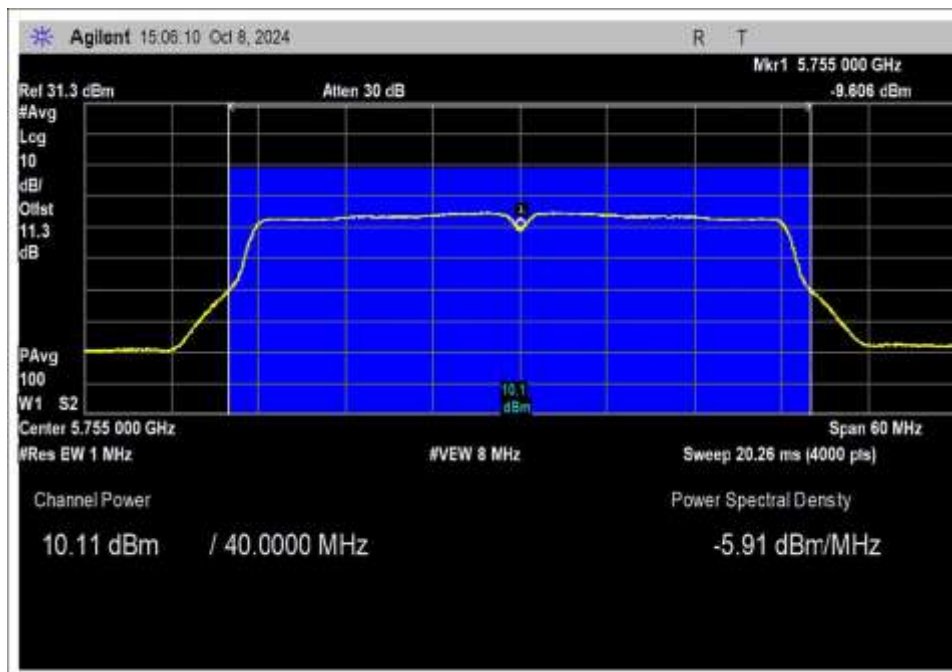

802.11ac 40MHz, Low Channel

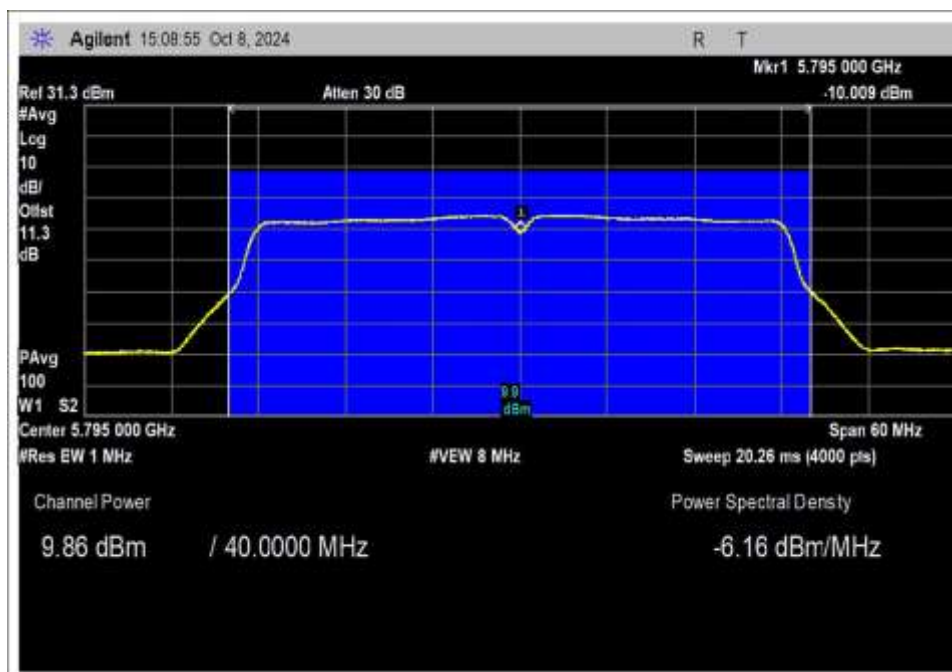

802.11ac 40MHz, High Channel

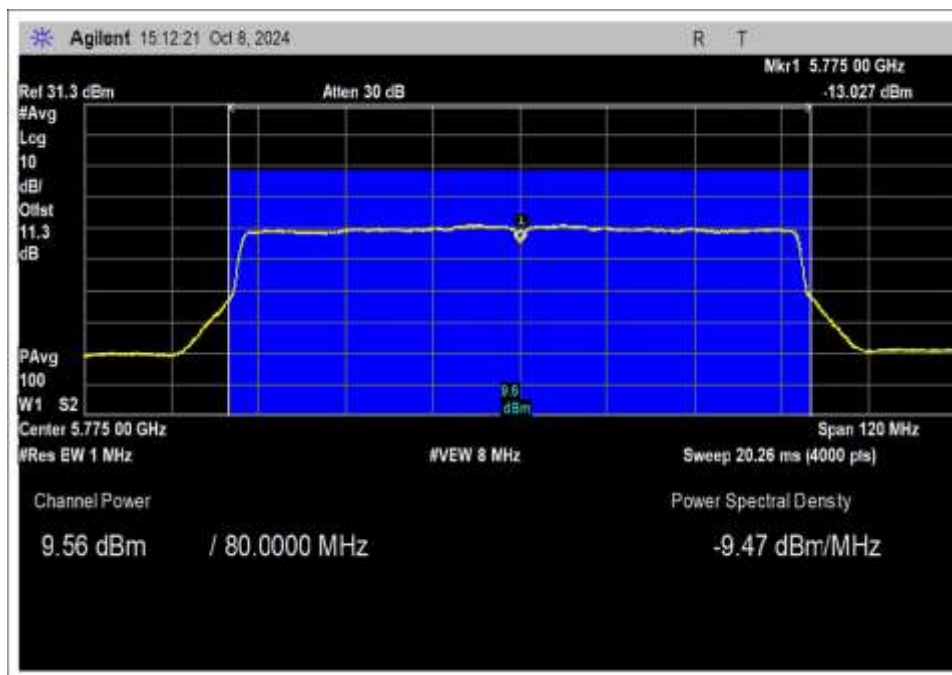

802.11ac 80MHz

**Test Setup Photo(s)**



Overall Test Setup



Test Setup, Closeup View

## 15.407(a) Power Spectral Density

| Test Setup/Conditions - RF Conducted Measurement |                                                                                                                     |                |                                 |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|----------------|---------------------------------|
| Test Location:                                   | Bothell Lab Bench                                                                                                   | Test Engineer: | Hieu Song Nguyenpham<br>E. Wong |
| Test Method:                                     | ANSI C63.10 (2020), KDB 789033<br>662911 D01 Multiple Transmitter<br>Output v02r01                                  | Test Date(s):  | 10/07-09/2024                   |
| Configuration:                                   | A                                                                                                                   |                |                                 |
| Test Setup:                                      | The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer. |                |                                 |

| Environmental Conditions |           |                        |       |
|--------------------------|-----------|------------------------|-------|
| Temperature (°C)         | 21.2-23.7 | Relative Humidity (%): | 39-45 |

| Test Equipment |                   |              |                    |           |           |
|----------------|-------------------|--------------|--------------------|-----------|-----------|
| Asset#         | Description       | Manufacturer | Model              | Cal Date  | Cal Due   |
| 03013          | Cable             | Astrolab     | 32022-2-2909K-36TC | 1/9/2024  | 1/9/2026  |
| P07365         | Attenuator        | Weinschel    | 54A-10             | 5/26/2023 | 5/26/2025 |
| 03471          | Spectrum Analyzer | Agilent      | E4440A             | 2/23/2024 | 2/23/2026 |

| Test Data Summary - RF Conducted Measurement -Chain 0 |                |                        |                       |                    |         |
|-------------------------------------------------------|----------------|------------------------|-----------------------|--------------------|---------|
| Measurement Option: AVGSA-1                           |                |                        |                       |                    |         |
| Frequency (MHz)                                       | Modulation     | Ant. Type / Gain (dBi) | Measured (dBm/500kHz) | Limit (dBm/500kHz) | Results |
| 5745                                                  | 802.11a        | External/4.66          | -3.365                | ≤30                | Pass    |
| 5785                                                  | 802.11a        | External/4.66          | -3.672                | ≤30                | Pass    |
| 5825                                                  | 802.11a        | External/4.66          | -3.332                | ≤30                | Pass    |
| 5745                                                  | 802.11n HT20   | External/4.66          | -3.423                | ≤30                | Pass    |
| 5785                                                  | 802.11n HT20   | External/4.66          | -3.977                | ≤30                | Pass    |
| 5825                                                  | 802.11n HT20   | External/4.66          | -4.043                | ≤30                | Pass    |
| 5745                                                  | 802.11ac 20MHz | External/4.66          | -3.806                | ≤30                | Pass    |
| 5785                                                  | 802.11ac 20MHz | External/4.66          | -4.077                | ≤30                | Pass    |
| 5825                                                  | 802.11ac 20MHz | External/4.66          | -4.094                | ≤30                | Pass    |
| 5755                                                  | 802.11n HT40   | External/4.66          | -6.926                | ≤30                | Pass    |
| 5795                                                  | 802.11n HT40   | External/4.66          | -6.875                | ≤30                | Pass    |
| 5755                                                  | 802.11ac 40MHz | External/4.66          | -7.159                | ≤30                | Pass    |
| 5795                                                  | 802.11ac 40MHz | External/4.66          | -7.066                | ≤30                | Pass    |
| 5775                                                  | 802.11ac 80MHz | External/4.66          | -10.365               | ≤30                | Pass    |

| Test Data Summary - RF Conducted Measurement -Chain 1 |                |                        |                       |                    |         |
|-------------------------------------------------------|----------------|------------------------|-----------------------|--------------------|---------|
| Measurement Option: AVGSA-1                           |                |                        |                       |                    |         |
| Frequency (MHz)                                       | Modulation     | Ant. Type / Gain (dBi) | Measured (dBm/500kHz) | Limit (dBm/500kHz) | Results |
| 5745                                                  | 802.11a        | External/4.66          | -2.712                | ≤30                | Pass    |
| 5785                                                  | 802.11a        | External/4.66          | -2.961                | ≤30                | Pass    |
| 5825                                                  | 802.11a        | External/4.66          | -3.204                | ≤30                | Pass    |
| 5745                                                  | 802.11n HT20   | External/4.66          | -2.925                | ≤30                | Pass    |
| 5785                                                  | 802.11n HT20   | External/4.66          | -3.021                | ≤30                | Pass    |
| 5825                                                  | 802.11n HT20   | External/4.66          | -3.622                | ≤30                | Pass    |
| 5745                                                  | 802.11ac 20MHz | External/4.66          | -3.681                | ≤30                | Pass    |
| 5785                                                  | 802.11ac 20MHz | External/4.66          | -3.313                | ≤30                | Pass    |
| 5825                                                  | 802.11ac 20MHz | External/4.66          | -3.233                | ≤30                | Pass    |
| 5755                                                  | 802.11n HT40   | External/4.66          | -6.343                | ≤30                | Pass    |
| 5795                                                  | 802.11n HT40   | External/4.66          | -6.387                | ≤30                | Pass    |
| 5755                                                  | 802.11ac 40MHz | External/4.66          | -6.178                | ≤30                | Pass    |
| 5795                                                  | 802.11ac 40MHz | External/4.66          | -6.421                | ≤30                | Pass    |
| 5775                                                  | 802.11ac 80MHz | External/4.66          | -9.879                | ≤30                | Pass    |

| Test Data Summary - RF Conducted Measurement- MIMO Total PSD |                |                    |        |                          |                 |         |
|--------------------------------------------------------------|----------------|--------------------|--------|--------------------------|-----------------|---------|
| Measurement Method: AVGPSD-1                                 |                |                    |        |                          |                 |         |
| Frequency (MHz)                                              | Modulation     | Measured (dBm/MHz) |        | Measured Total (dBm/MHz) | Limit (dBm/MHz) | Results |
|                                                              |                | Ch0                | Ch1    |                          |                 |         |
| 5745                                                         | 802.11a        | -3.365             | -2.712 | -0.02                    | ≤30             | Pass    |
| 5785                                                         | 802.11a        | -3.672             | -2.961 | -0.29                    | ≤30             | Pass    |
| 5825                                                         | 802.11a        | -3.332             | -3.204 | -0.26                    | ≤30             | Pass    |
| 5745                                                         | 802.11n HT20   | -3.423             | -2.925 | -0.16                    | ≤30             | Pass    |
| 5785                                                         | 802.11n HT20   | -3.977             | -3.021 | -0.46                    | ≤30             | Pass    |
| 5825                                                         | 802.11n HT20   | -4.043             | -3.622 | -0.82                    | ≤30             | Pass    |
| 5745                                                         | 802.11ac 20MHz | -3.806             | -3.681 | -0.73                    | ≤30             | Pass    |
| 5785                                                         | 802.11ac 20MHz | -4.077             | -3.313 | -0.67                    | ≤30             | Pass    |
| 5825                                                         | 802.11ac 20MHz | -4.094             | -3.233 | -0.63                    | ≤30             | Pass    |
| 5755                                                         | 802.11n HT40   | -6.926             | -6.343 | -3.61                    | ≤30             | Pass    |
| 5795                                                         | 802.11n HT40   | -6.875             | -6.387 | -3.61                    | ≤30             | Pass    |
| 5755                                                         | 802.11ac 40MHz | -7.159             | -6.178 | -3.63                    | ≤30             | Pass    |
| 5795                                                         | 802.11ac 40MHz | -7.066             | -6.421 | -3.72                    | ≤30             | Pass    |
| 5775                                                         | 802.11ac 80MHz | -10.365            | -9.879 | -7.10                    | ≤30             | Pass    |


Ch0=Chain0

Ch1=Chain1


662911 D01 Multiple Transmitter Output v02r01 E 2 b) Measure and sum spectral maxima across the outputs.

## Plot(s)


### Chain 0

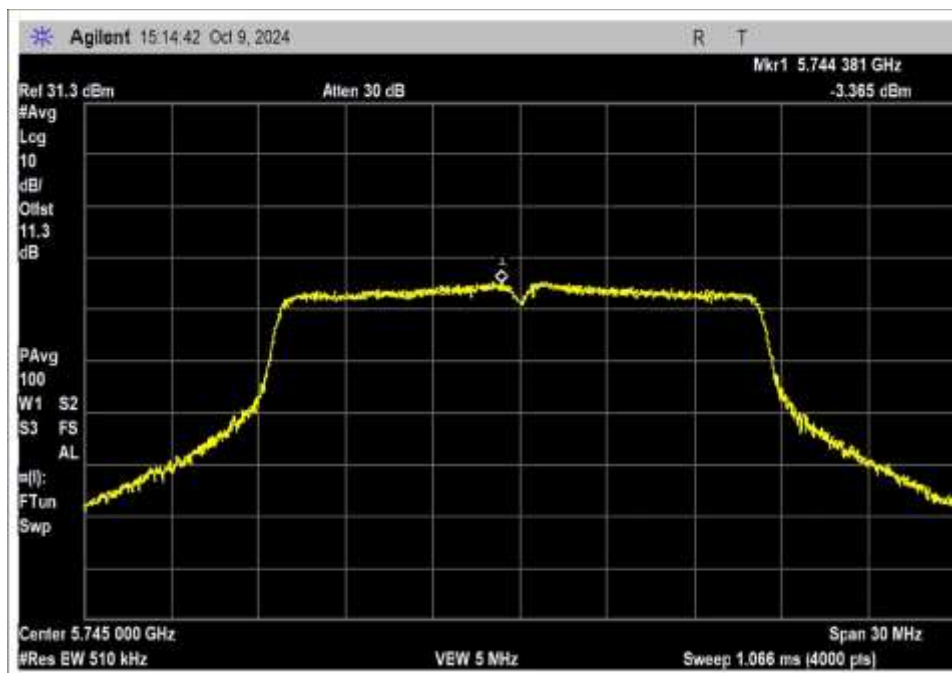


OFDM, Low Channel

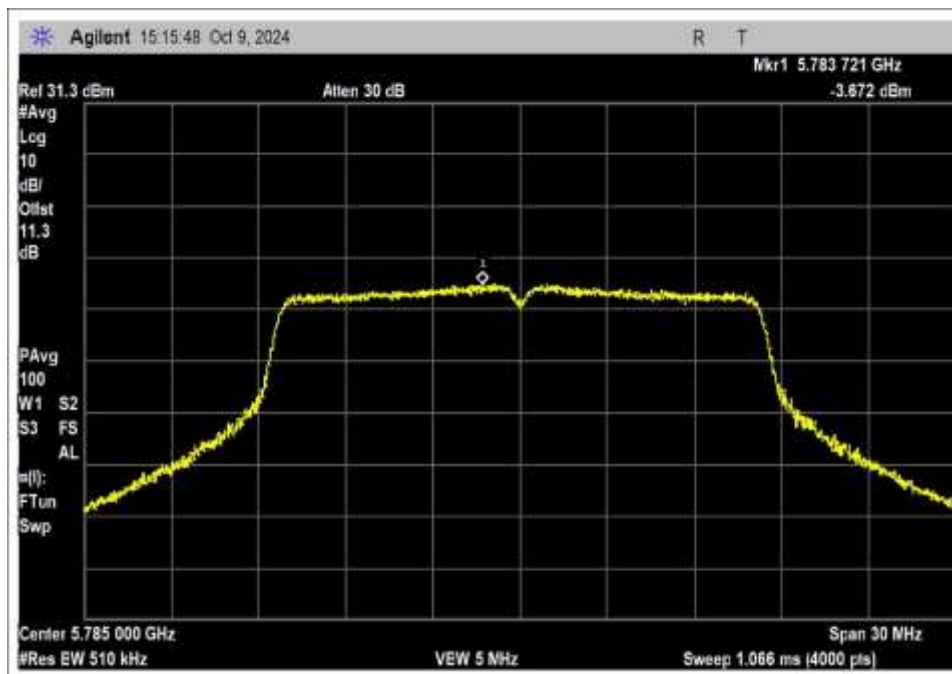


OFDM, Middle Channel

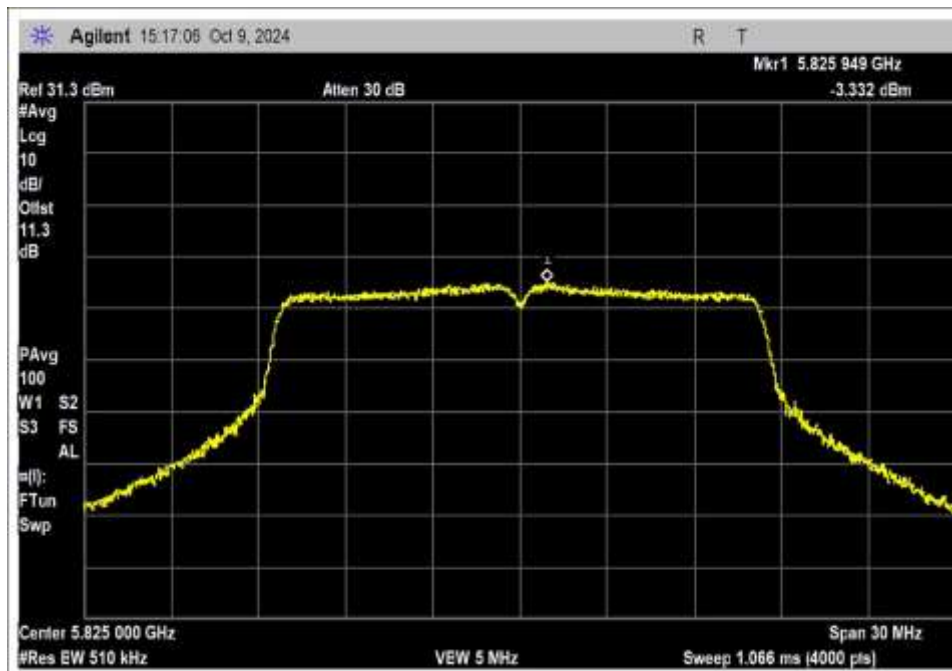


OFDM, High Channel

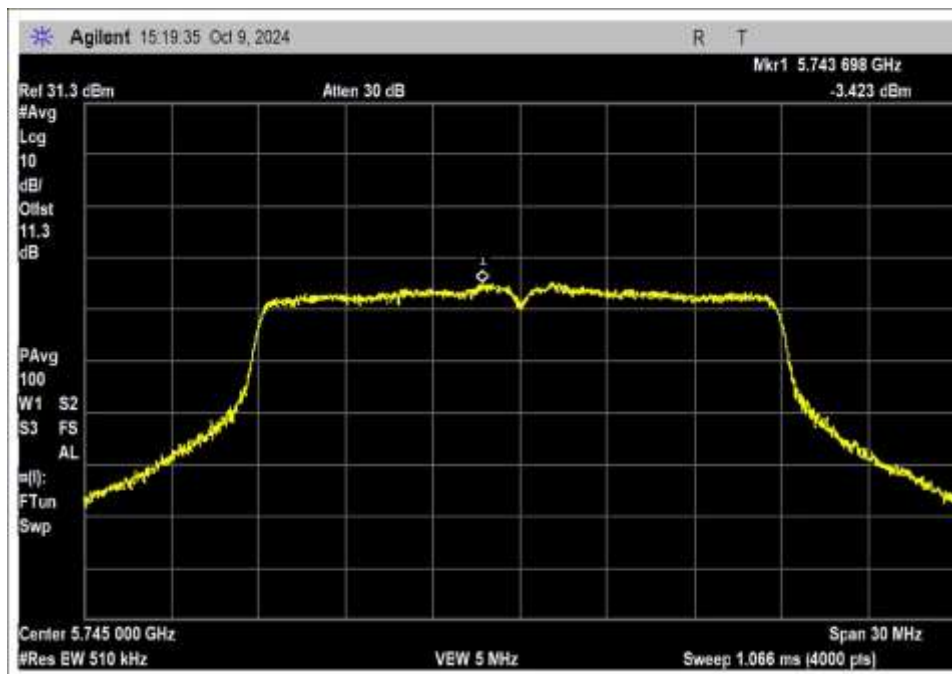


802.11n HT20, Low Channel

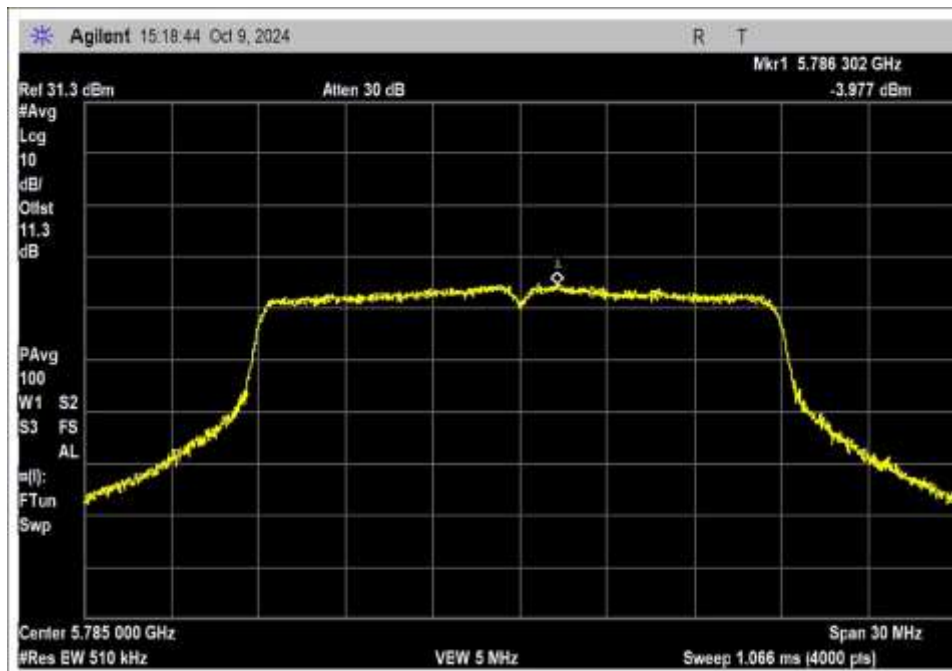


802.11n HT20, Middle Channel

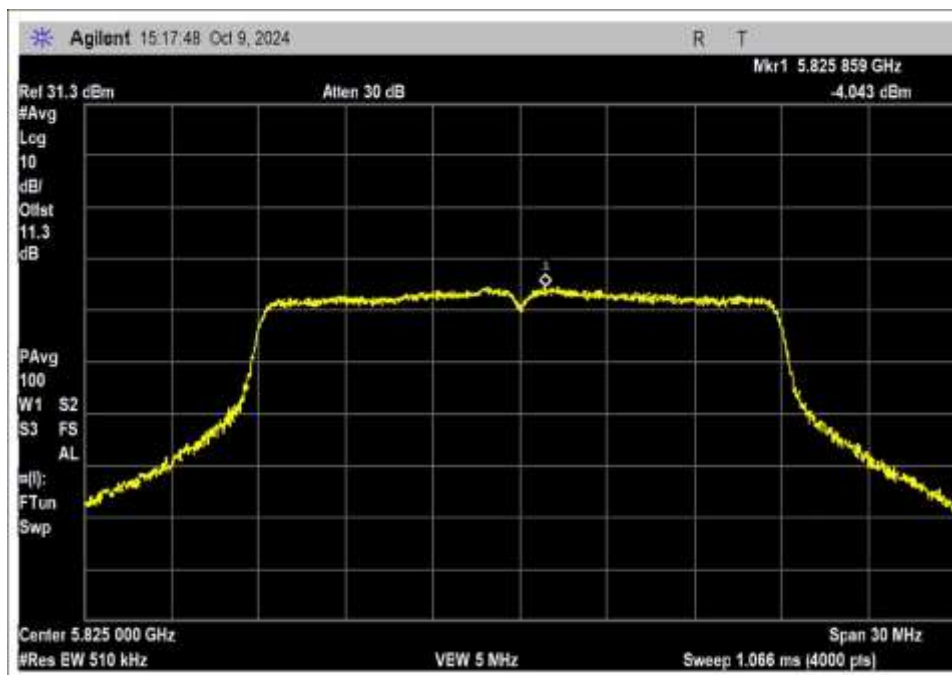


802.11n HT20, High Channel

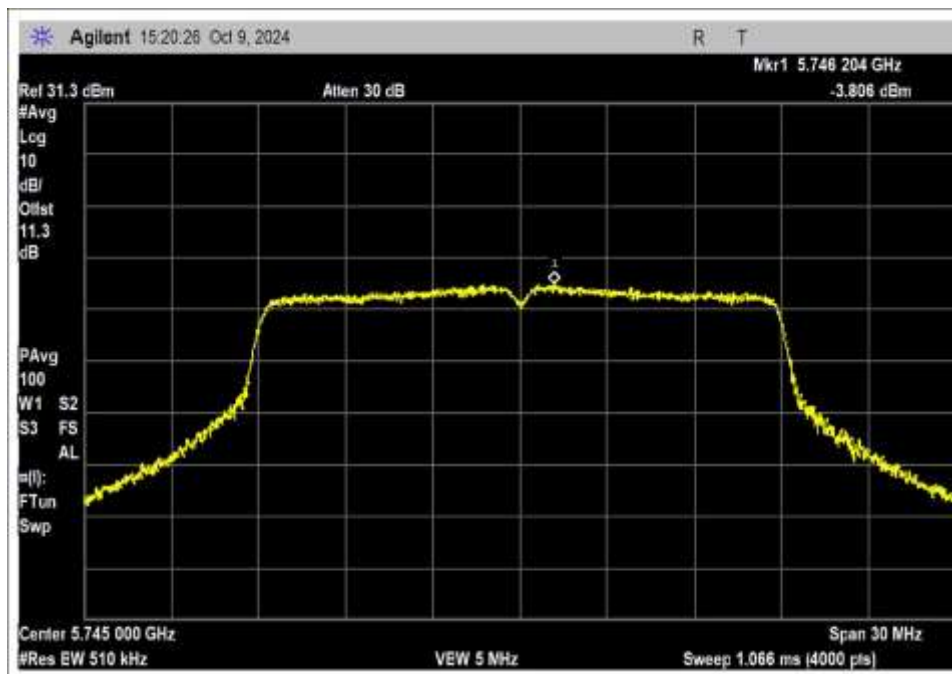


802.11ac 20MHz, Low Channel

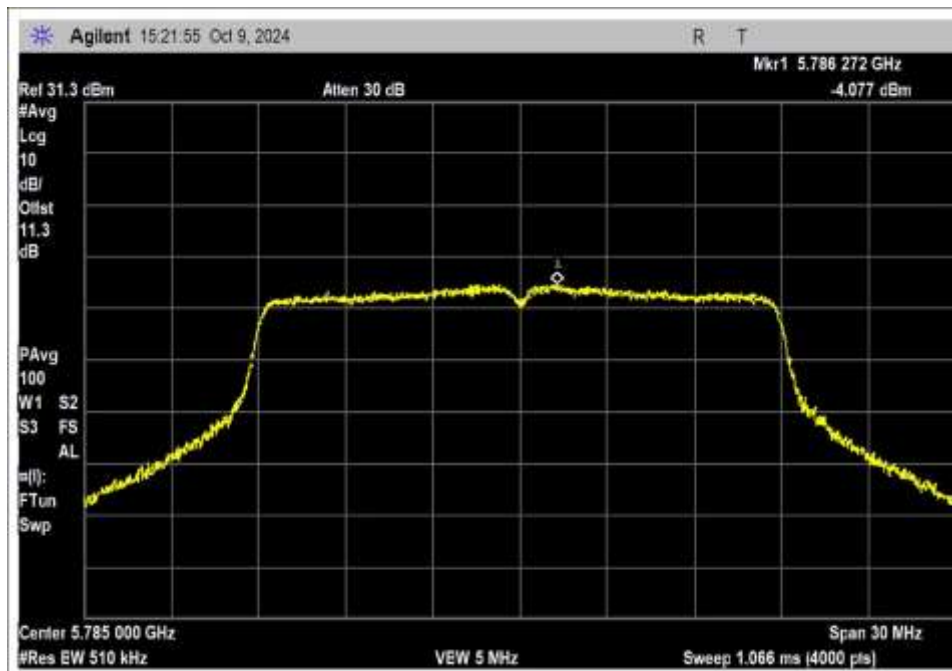


802.11ac 20MHz, Middle Channel

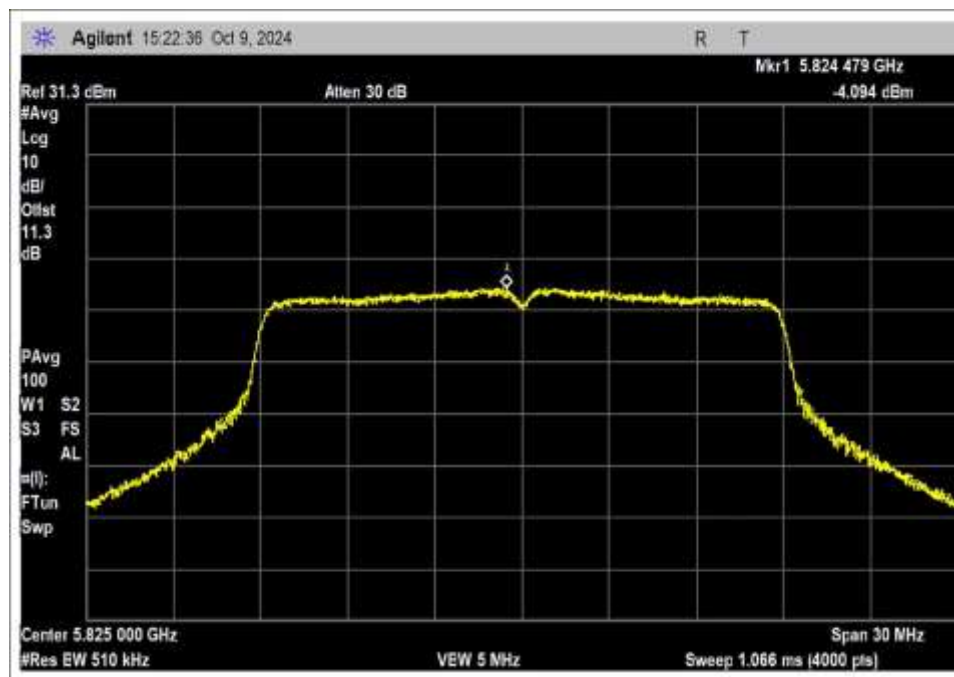


802.11ac 20MHz, High Channel

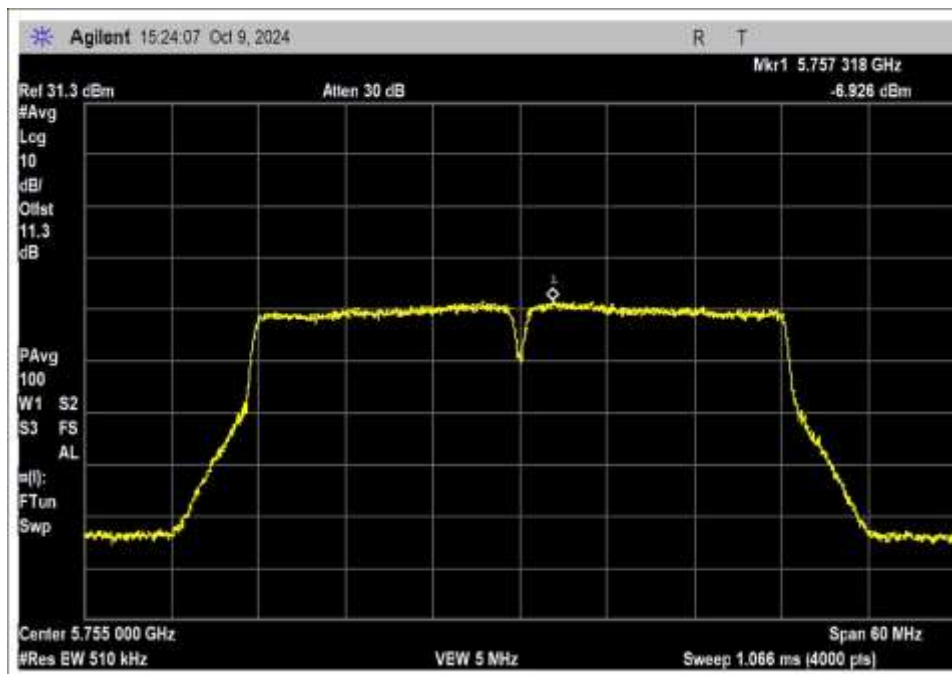


802.11n HT40, Low Channel

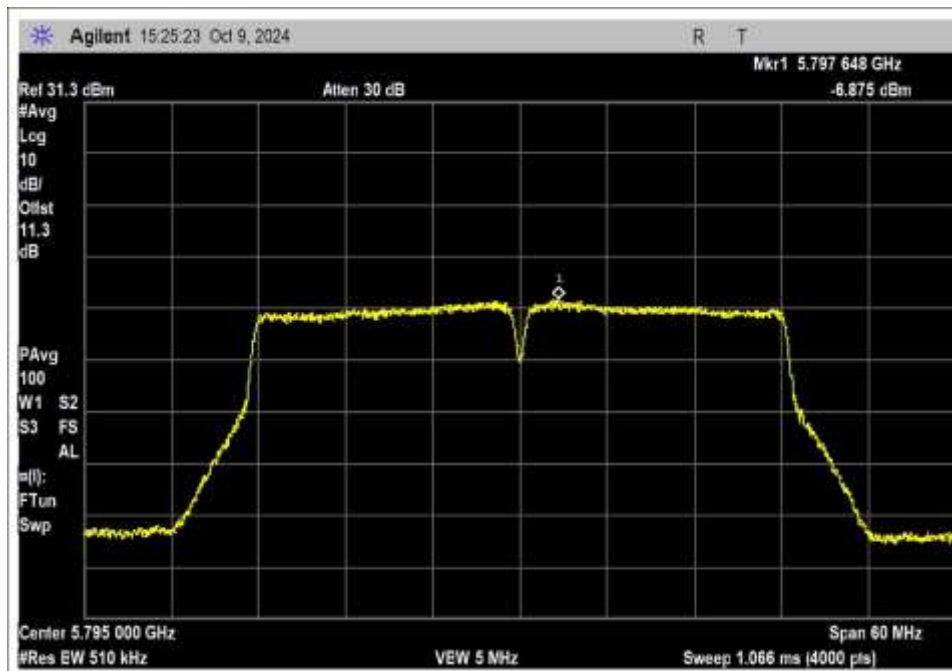


802.11n HT40, High Channel

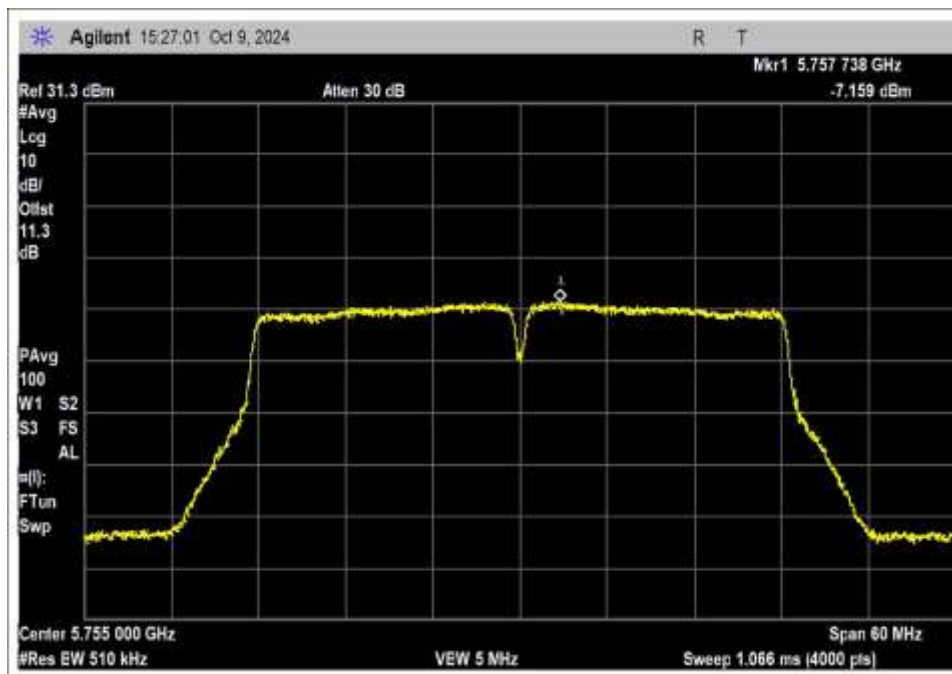

802.11ac 40MHz, Low Channel

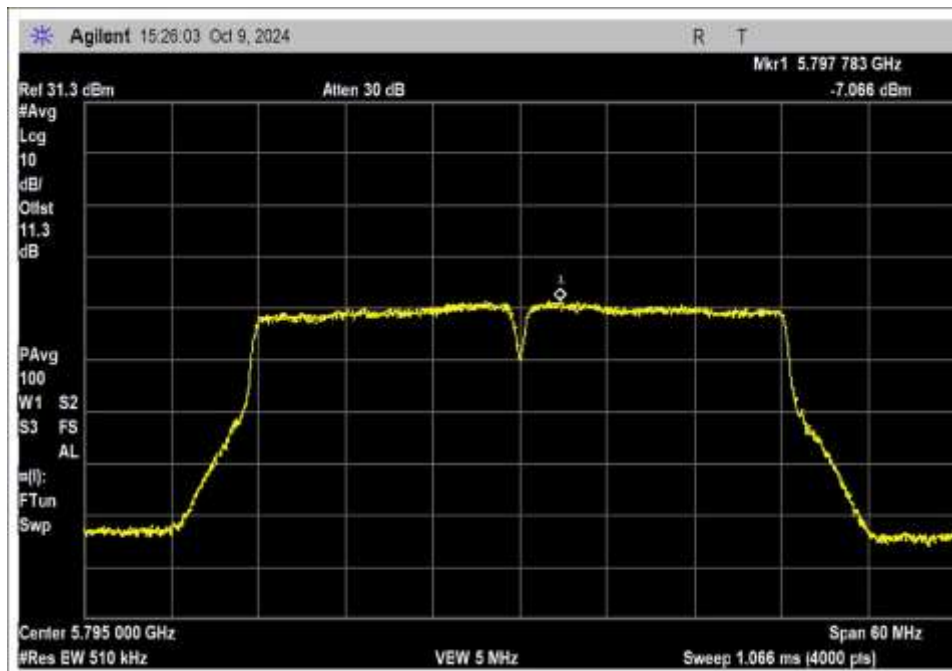


802.11ac 40MHz, High Channel

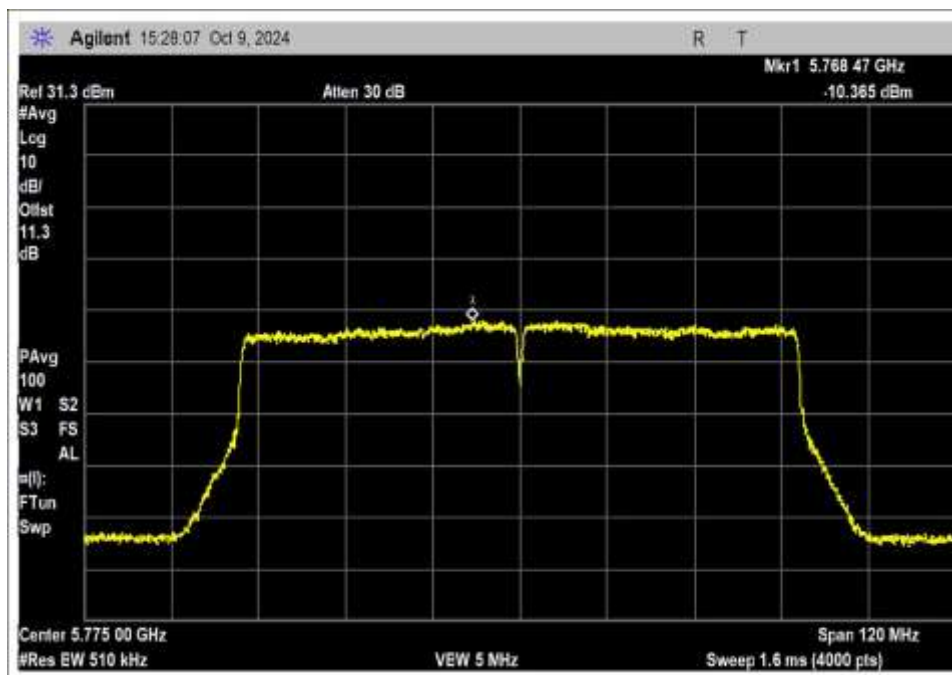


802.11ac 80MHz


Chain 1

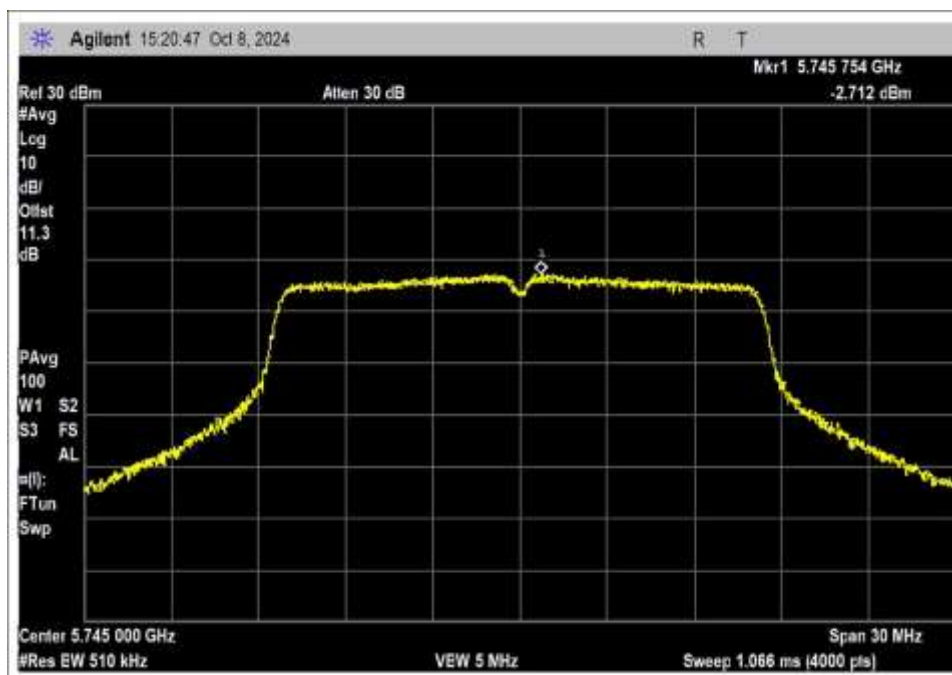


OFDM, Low Channel

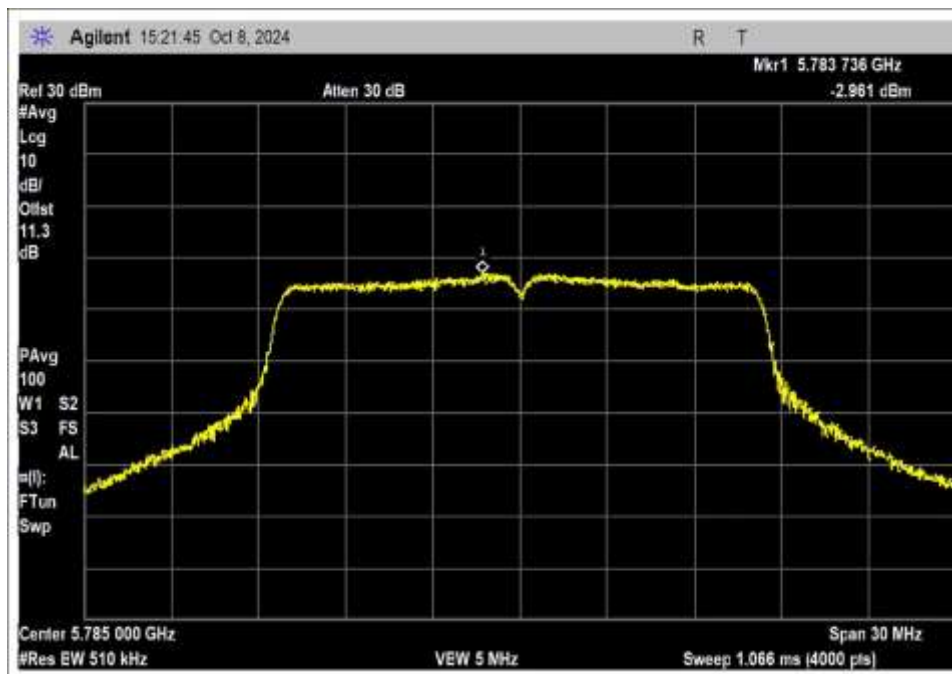


OFDM, Middle Channel

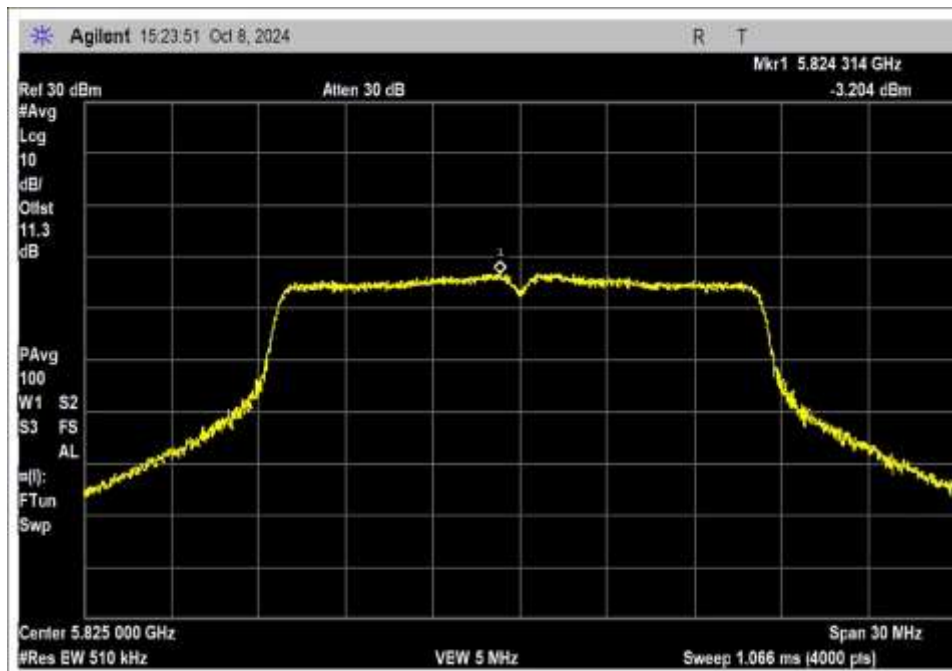


OFDM, High Channel

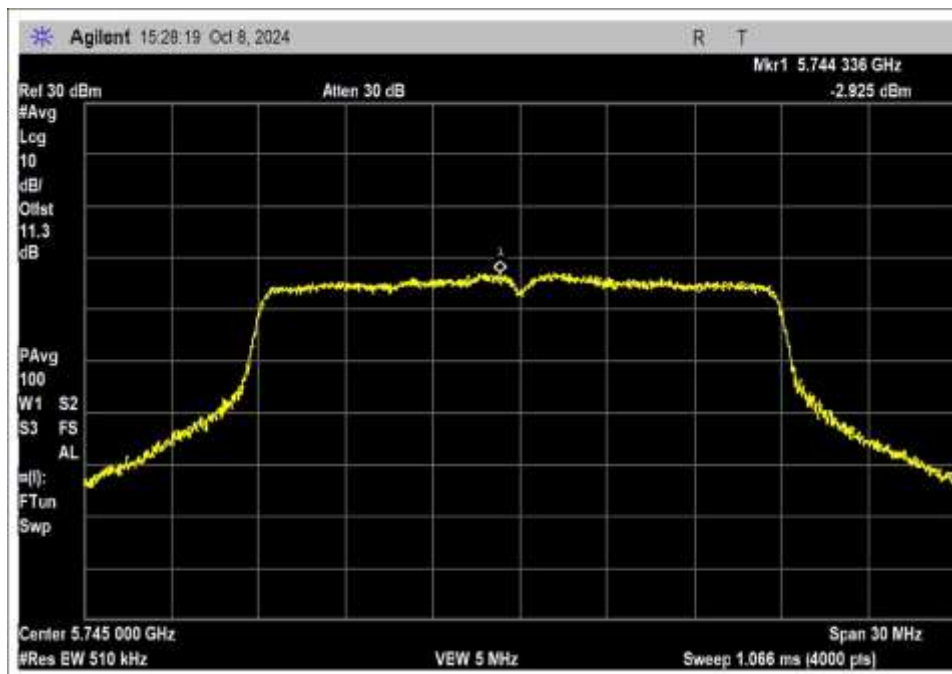


802.11n HT20, Low Channel

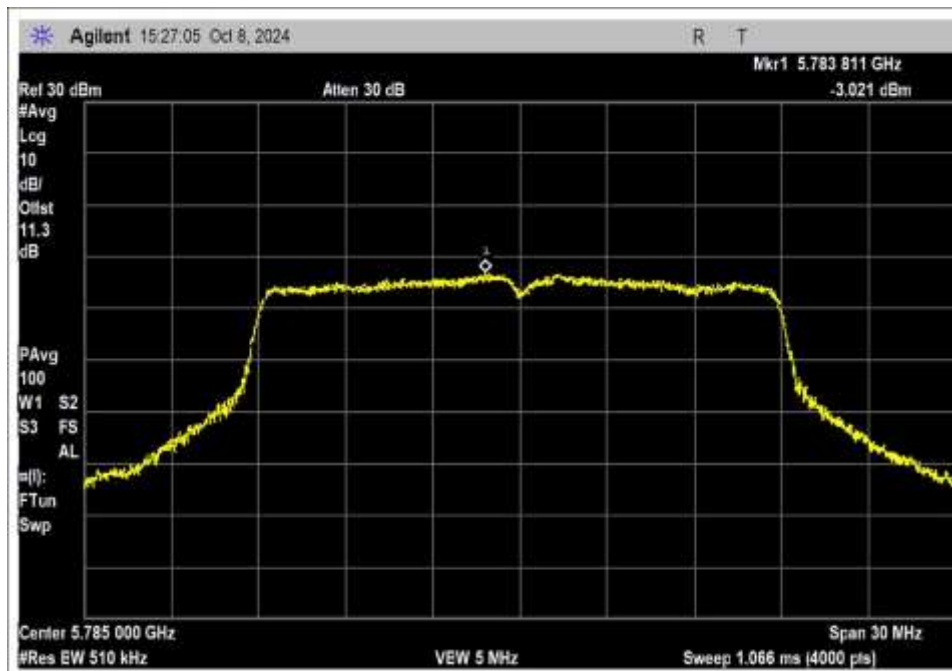


802.11n HT20, Middle Channel

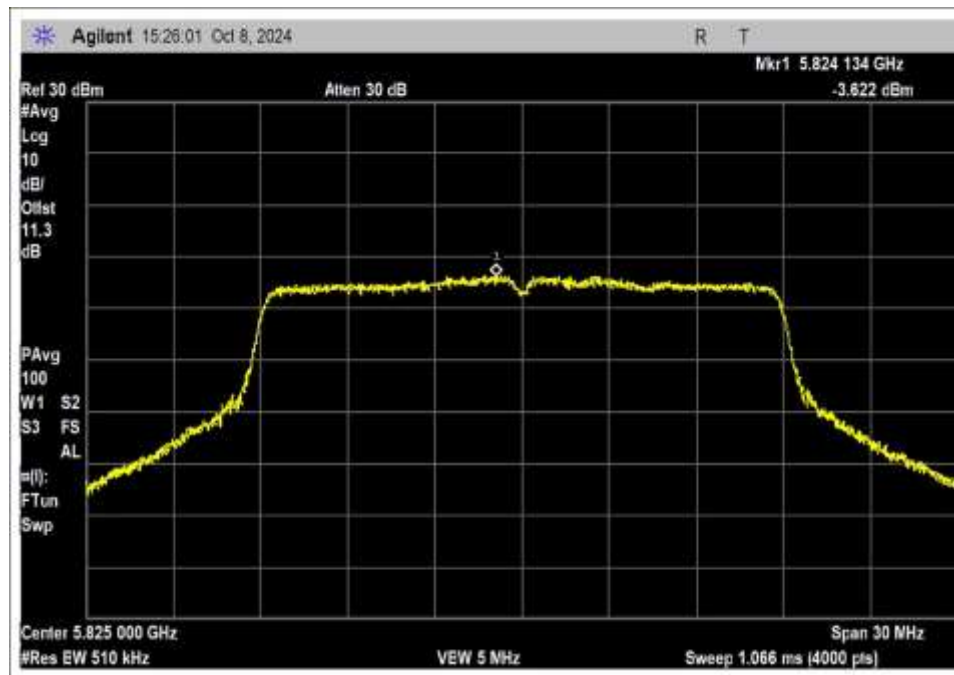


802.11n HT20, High Channel

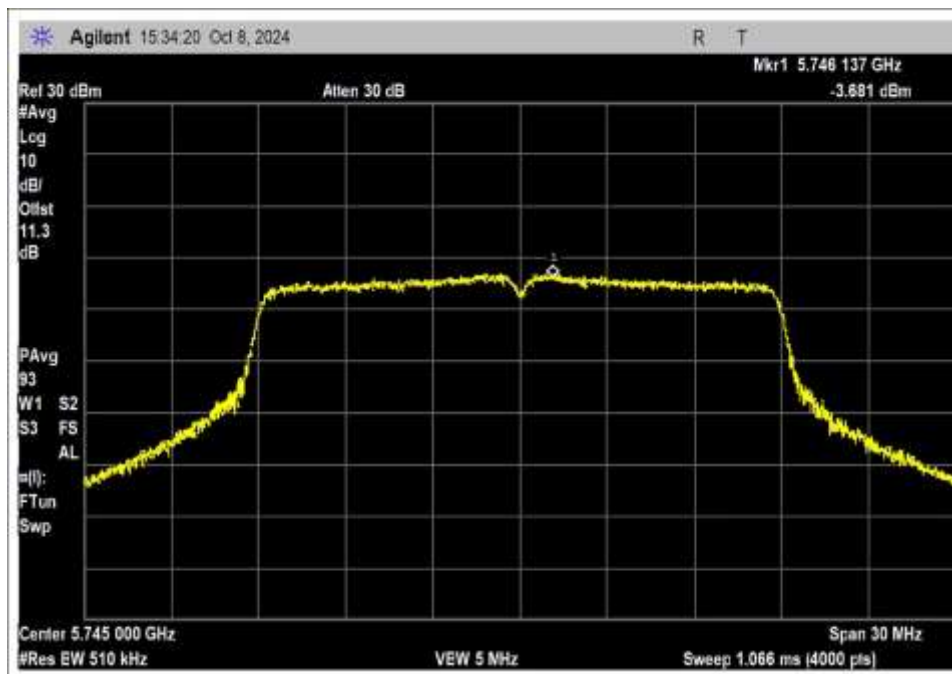


802.11ac 20MHz, Low Channel

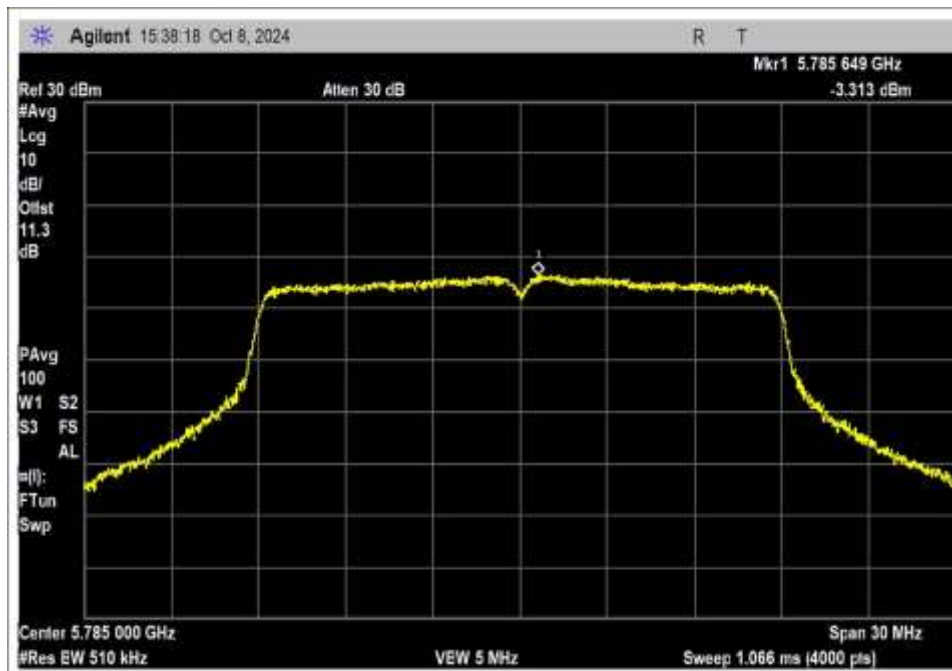


802.11ac 20MHz, Middle Channel

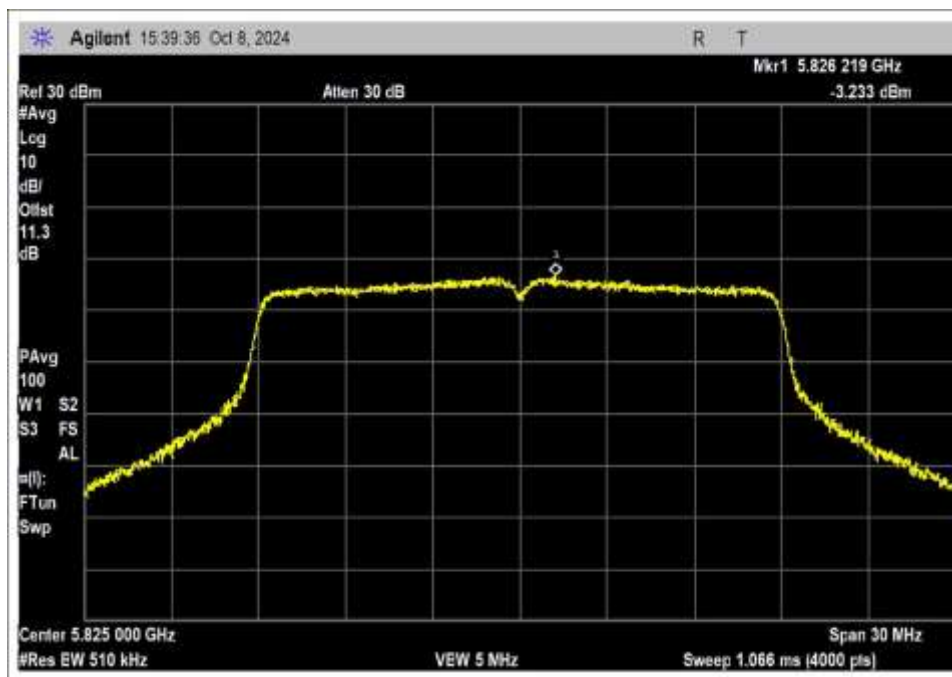


802.11ac 20MHz, High Channel

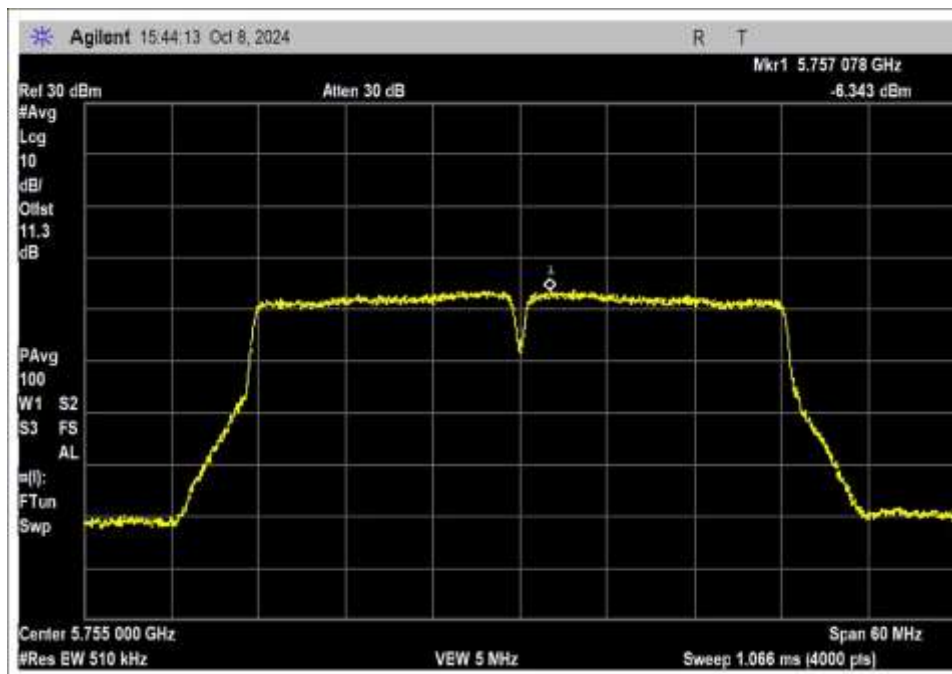


802.11n HT40, Low Channel

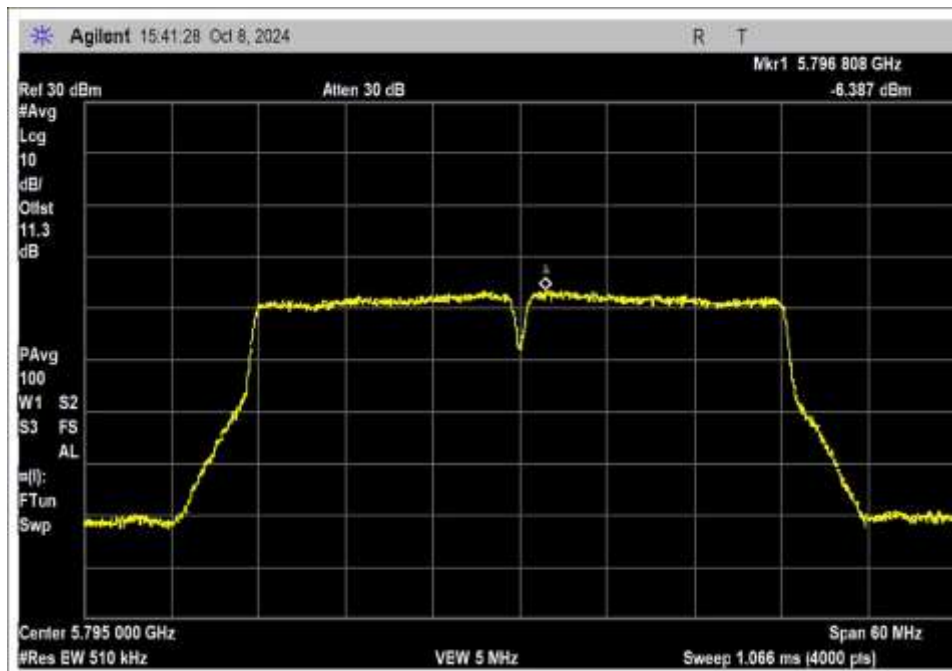


802.11n HT40, High Channel

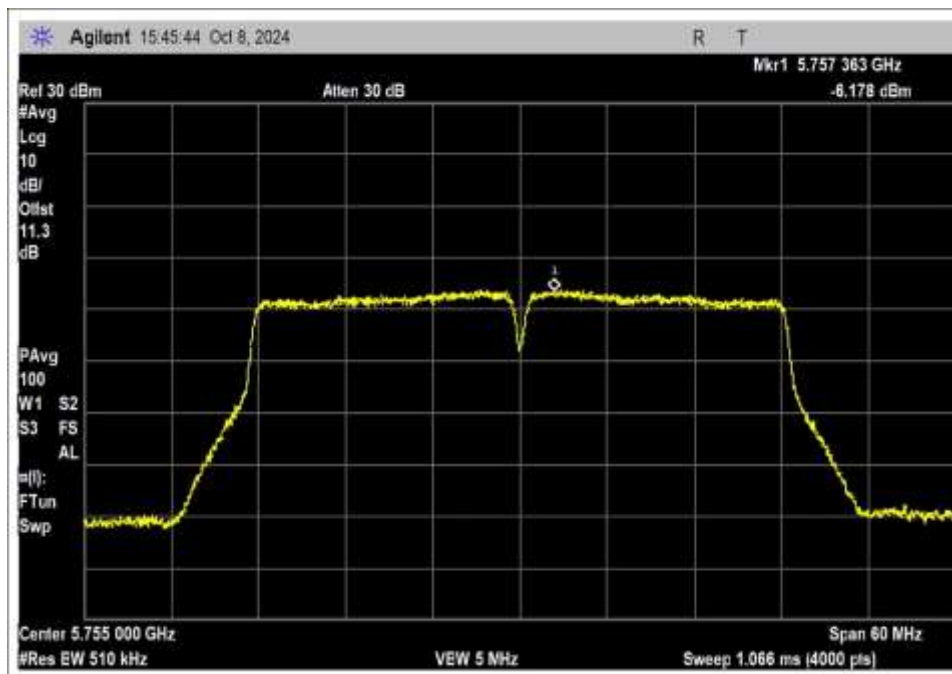

802.11ac 40MHz, Low Channel

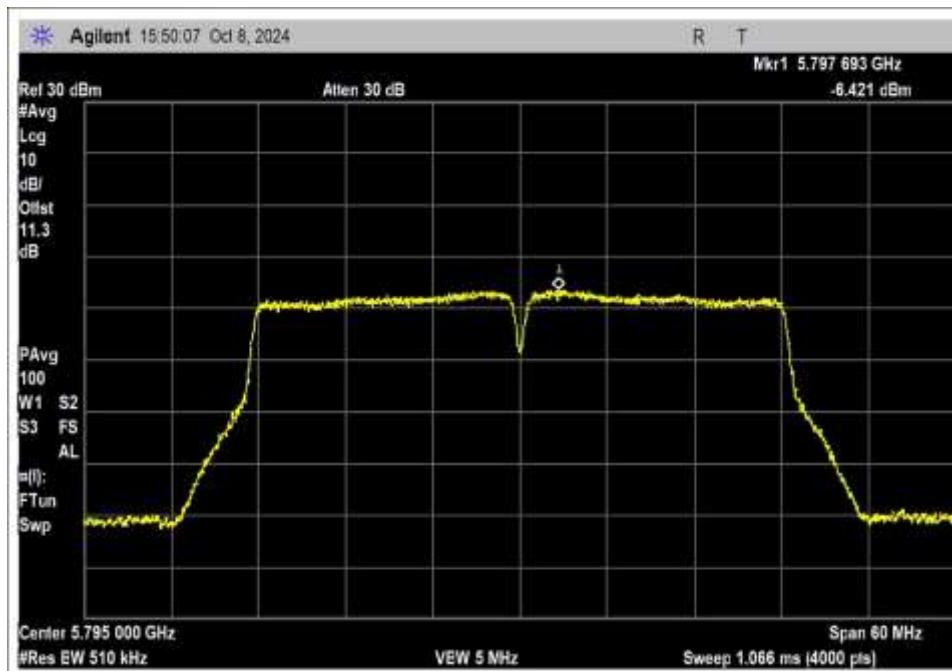

802.11ac 40MHz, High Channel

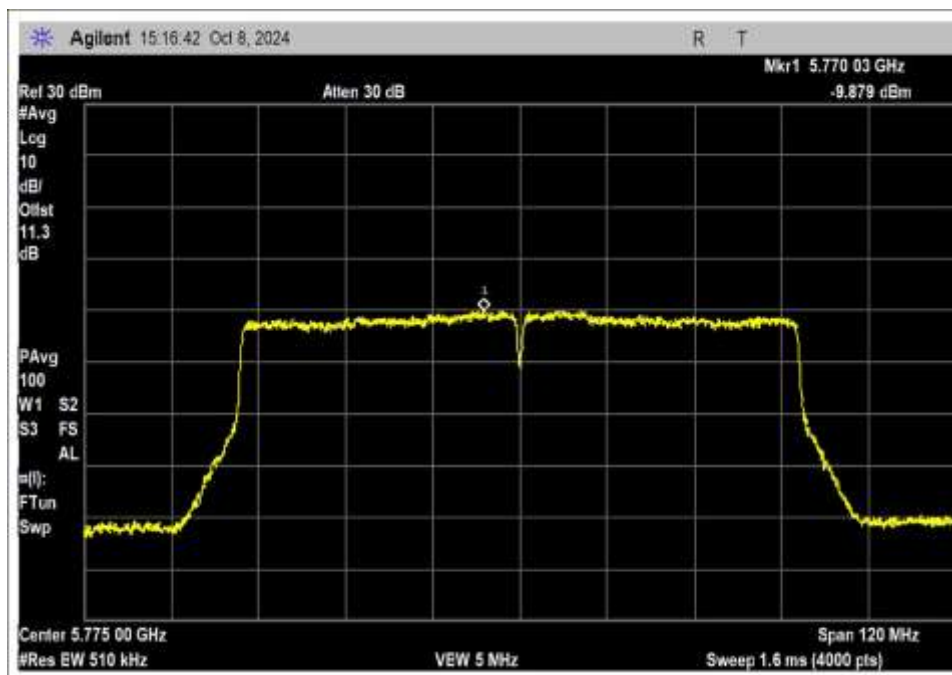

802.11ac 80MHz

**Test Setup Photo(s)**



Overall Test Setup



Test Setup, Closeup View

## 15.407(b) Radiated Emissions & Band Edge

### Test Data

Test Location: CKC Laboratories, Inc • 110 N. Olinda Place • Brea, CA • 714 993 6112  
 Customer: **Tonal**  
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **110825** Date: 1/15/2025  
 Test Type: **Radiated Scan** Time: 09:55:07  
 Tested By: E. Wong Sequence#: 24  
 Software: EMITest 5.03.20

#### Equipment Tested:


| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

#### Support Equipment:

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

#### Test Conditions / Notes:

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Condition #1</p> <p>Tx Freq:<br/>           802.11a : 5785MHz<br/>           802.11ac20 : 5785MHz<br/>           802.11ac40: 5755MHz<br/>           802.11ac80: 5775MHz</p> <p>Frequency range of measurement = 9 kHz- 1 GHz.<br/>           9 kHz -150 kHz;RBW=200 Hz,VBW=600 Hz;<br/>           150 kHz-30 MHz;RBW=9 kHz,VBW=27 kHz;<br/>           30 MHz-1000 MHz;RBW=120 kHz,VBW=360 kHz,</p> <p>Worst case emission, no spurious emission found recorded data represent noise floor level or non-intentional emission of the device.</p> <p>Test Environment Conditions:<br/>           Temperature: 20°C<br/>           Humidity: 34%<br/>           Pressure: 100kPa</p> <p><b>Modification 1 (MOD1) was in place during testing:</b><br/>           Reduce RF output power to 12dBm in the software for 802.11n HT40 Chain 0.<br/>           Added a ferrite (Würth: 742 712 21) on lower resistor wire. Green Resistor</p> <p>Site D<br/>           ANSI C63.10-2020</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

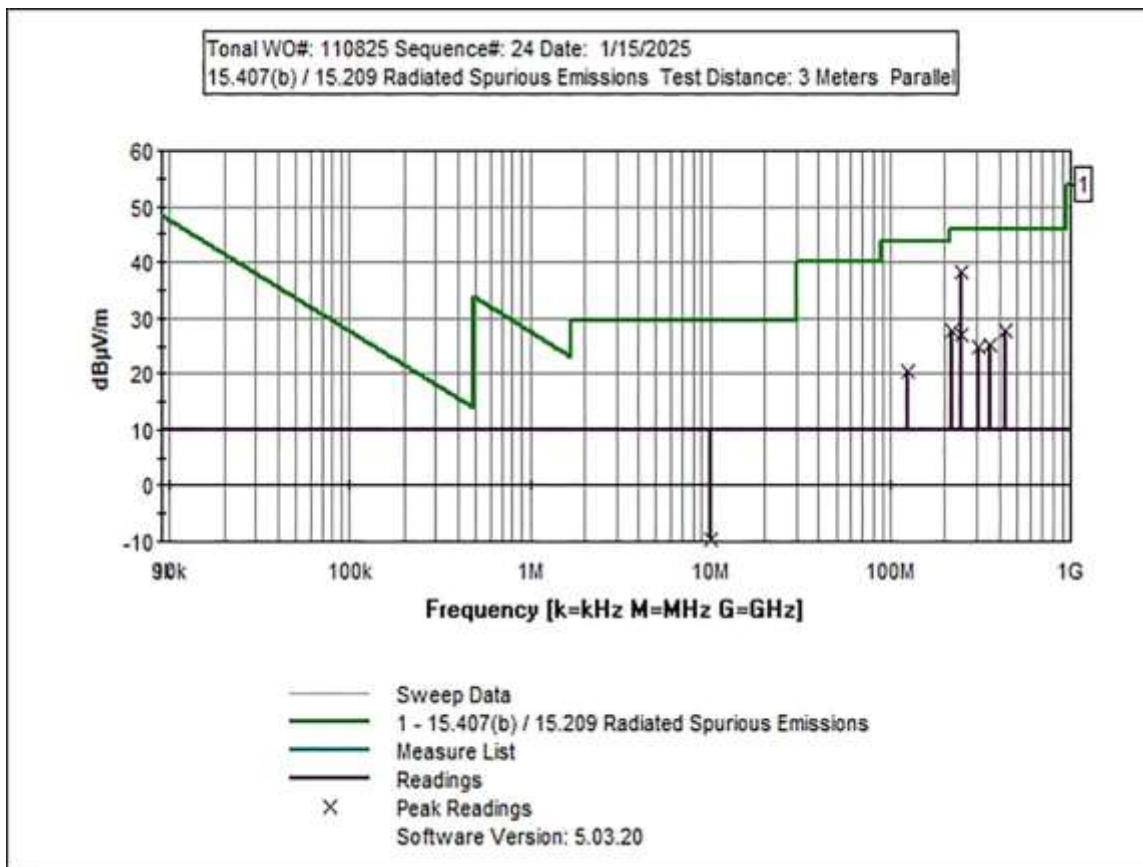

**Test Equipment:**

| ID | Asset #  | Description                          | Model         | Calibration Date | Cal Due Date |
|----|----------|--------------------------------------|---------------|------------------|--------------|
| T1 | AN03834  | Spectrum Analyzer                    | E4448A        | 5/6/2024         | 5/6/2026     |
| T2 | AN03628  | Biconilog Antenna                    | CBL6111C      | 5/16/2024        | 5/16/2026    |
| T3 | ANP01911 | Cable-Amplitude<br>+15C to +45C (dB) | RG214/U       | 1/4/2024         | 1/4/2026     |
| T4 | ANP04382 | Cable                                | LDF-50        | 6/4/2024         | 6/4/2026     |
| T5 | AN00010  | Preamp                               | 8447D         | 1/2/2024         | 1/2/2026     |
| T6 | ANP06985 | Cable                                | Sucoflex 104A | 9/12/2024        | 9/12/2026    |
| T7 | AN00314  | Loop Antenna                         | 6502          | 5/3/2024         | 5/3/2026     |

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq     | Rdng       | T1<br>T5      | T2<br>T6      | T3<br>T7     | T4   | Dist  | Corr         | Spec         | Margin | Polar |
|---|----------|------------|---------------|---------------|--------------|------|-------|--------------|--------------|--------|-------|
|   | MHz      | dB $\mu$ V | dB            | dB            | dB           | dB   | Table | dB $\mu$ V/m | dB $\mu$ V/m | dB     | Ant   |
| 1 | 245.970M | 43.6       | +0.0<br>-26.5 | +17.9<br>+0.2 | +1.5<br>+0.0 | +1.6 | +0.0  | 38.3         | 46.0         | -7.7   | Horiz |
| 2 | 220.420M | 34.8       | +0.0<br>-26.6 | +16.5<br>+0.1 | +1.4<br>+0.0 | +1.5 | +0.0  | 27.7         | 46.0         | -18.3  | Horiz |
| 3 | 435.003M | 28.1       | +0.0<br>-27.6 | +22.8<br>+0.2 | +2.0<br>+0.0 | +2.2 | +0.0  | 27.7         | 46.0         | -18.3  | Vert  |
| 4 | 245.983M | 32.3       | +0.0<br>-26.5 | +17.9<br>+0.2 | +1.5<br>+0.0 | +1.6 | +0.0  | 27.0         | 46.0         | -19.0  | Vert  |
| 5 | 360.000M | 27.0       | +0.0<br>-27.0 | +21.4<br>+0.2 | +1.8<br>+0.0 | +1.9 | +0.0  | 25.3         | 46.0         | -20.7  | Horiz |
| 6 | 312.000M | 28.6       | +0.0<br>-26.6 | +19.0<br>+0.2 | +1.7<br>+0.0 | +1.8 | +0.0  | 24.7         | 46.0         | -21.3  | Horiz |
| 7 | 124.600M | 32.2       | +0.0<br>-27.0 | +13.2<br>+0.1 | +1.0<br>+0.0 | +1.1 | +0.0  | 20.6         | 43.5         | -22.9  | Vert  |
| 8 | 9.951M   | 21.0       | +0.0<br>+0.0  | +0.0<br>+0.0  | +0.3<br>+8.7 | +0.2 | -40.0 | -9.8         | 29.5         | -39.3  | Paral |



Test Location: CKC Laboratories, Inc • 110 N. Olinda Place • Brea, CA • 714 993 6112  
 Customer: **Tonal**  
 Specification: **15.407(b)(4) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **110825** Date: 1/13/2025  
 Test Type: **Radiated Scan** Time: 16:28:29  
 Tested By: E. Wong Sequence#: 14  
 Software: EMITest 5.03.20

**Equipment Tested:**

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |


**Support Equipment:**

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

**Test Conditions / Notes:**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Condition #1</p> <p>Frequency range of measurement = 1GHz- 40GHz.<br/>         1000 MHz- 40 000 MHz;RBW=1MHz,VBW=3 MHz.</p> <p>Worst case emission, no spurious emission found recorded data represent noise floor level.</p> <p>Test Environment Conditions:<br/>         Temperature: 20°C<br/>         Humidity: 34%<br/>         Pressure: 100kPa</p> <p><b>Modification 1 (MOD1) was in place during testing:</b><br/>         Reduce RF output power to 12dBm in the software for 802.11n HT40 Chain 0.<br/>         Added a ferrite (Würth: 742 712 21) on lower resistor wire. Green Resistor</p> <p>Site D<br/>         ANSI C63.10-2020</p> <p>Fundamental freq at the high edge of the High Pass filter used.</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Tonal W/O#: 110825 Sequence#: 14 Date: 1/13/2025  
15.407(b)(4) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Horiz

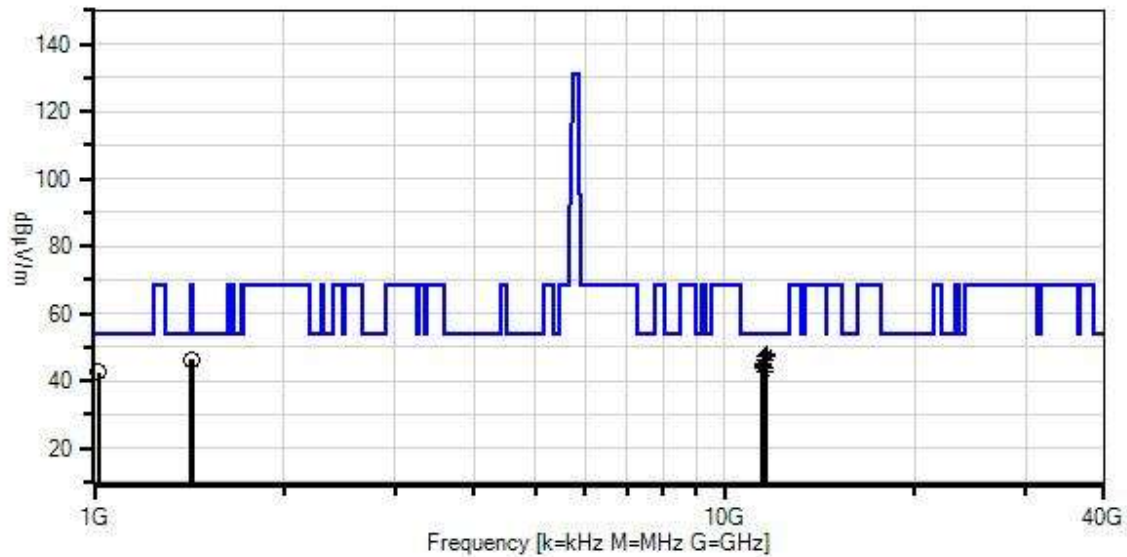

— Readings  
 × QP Readings  
 ▼ Ambient  
 ○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.20  
 1 - 15.407(b)(4) / 15.209 Radiated Spurious Emissions

#### Test Equipment:

| ID | Asset #  | Description       | Model                     | Calibration Date | Cal Due Date |
|----|----------|-------------------|---------------------------|------------------|--------------|
| T1 | AN03834  | Spectrum Analyzer | E4448A                    | 5/6/2024         | 5/6/2026     |
| T2 | AN01646  | Horn Antenna      | 3115                      | 3/8/2024         | 3/8/2026     |
| T3 | ANP07660 | Cable             | 32022-29094K-29094K-24TC  | 7/20/2024        | 7/20/2026    |
| T4 | AN00787  | Preamp            | 83017A                    | 6/27/2023        | 6/27/2025    |
| T5 | ANP04382 | Cable             | LDF-50                    | 6/4/2024         | 6/4/2026     |
| T6 | ANP08191 | Cable             | ANDL1-PNMNM-50            | 11/11/2024       | 11/11/2026   |
| T7 | AN02755  | High Pass Filter  | 11SH10-6000/T18000-O/O    | 2/23/2024        | 2/23/2026    |
|    | AN03367  | Horn Antenna      | 62-GH-62-25.              | 8/10/2023        | 8/10/2025    |
|    | ANP08087 | Cable             | 32022-29094K-29094K-120TC | 12/1/2023        | 12/1/2025    |
|    | ANP08088 | Cable             | 32022-29094K-29094K-120TC | 12/1/2023        | 12/1/2025    |
|    | AN01413  | Horn Antenna      | 84125-80008               | 10/15/2024       | 10/15/2026   |
|    | AN03158A | Horn Antenna      | GH-28-25                  | 7/17/2023        | 7/17/2025    |

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| #  | Freq      | Rdng | T1<br>T5 | T2<br>T6 | T3<br>T7 | T4    | Dist  | Corr   | Spec         | Margin | Polar |
|----|-----------|------|----------|----------|----------|-------|-------|--------|--------------|--------|-------|
|    | MHz       | dBμV | dB       | dB       | dB       | dB    | Table | dBμV/m | dBμV/m       | dB     | Ant   |
| 1  | 11648.400 | 24.1 | +0.0     | +39.5    | +0.9     | -39.2 | +0.0  | 48.0   | 54.0         | -6.0   | Horiz |
|    | M         |      | +14.3    | +8.0     | +0.4     |       |       |        |              |        |       |
|    | Ave       |      |          |          |          |       |       |        | 802.11a_H    |        |       |
| ^  | 11648.400 | 37.8 | +0.0     | +39.5    | +0.9     | -39.2 | +0.0  | 61.7   | 54.0         | +7.7   | Horiz |
|    | M         |      | +14.3    | +8.0     | +0.4     |       |       |        |              |        |       |
|    |           |      |          |          |          |       |       |        | 802.11a_H    |        |       |
| 3  | 11650.800 | 23.4 | +0.0     | +39.5    | +0.9     | -39.2 | +0.0  | 47.3   | 54.0         | -6.7   | Horiz |
|    | M         |      | +14.3    | +8.0     | +0.4     |       |       |        |              |        |       |
|    | Ave       |      |          |          |          |       |       |        | 802.11ac20_H |        |       |
| ^  | 11650.800 | 35.9 | +0.0     | +39.5    | +0.9     | -39.2 | +0.0  | 59.8   | 54.0         | +5.8   | Horiz |
|    | M         |      | +14.3    | +8.0     | +0.4     |       |       |        |              |        |       |
|    |           |      |          |          |          |       |       |        | 802.11ac20_H |        |       |
| 5  | 11570.660 | 23.8 | +0.0     | +39.3    | +0.9     | -39.2 | +0.0  | 47.3   | 54.0         | -6.7   | Horiz |
|    | M         |      | +14.2    | +7.9     | +0.4     |       |       |        |              |        |       |
|    | Ave       |      |          |          |          |       |       |        | 802.11ac20_M |        |       |
| ^  | 11570.660 | 37.2 | +0.0     | +39.3    | +0.9     | -39.2 | +0.0  | 60.7   | 54.0         | +6.7   | Horiz |
|    | M         |      | +14.2    | +7.9     | +0.4     |       |       |        |              |        |       |
|    |           |      |          |          |          |       |       |        | 802.11ac20_M |        |       |
| 7  | 1425.500M | 54.0 | +0.0     | +25.4    | +0.3     | -40.0 | +0.0  | 46.4   | 54.0         | -7.6   | Horiz |
|    |           |      | +4.2     | +2.5     | +0.0     |       |       |        | 802.11a_L    |        |       |
| 8  | 11570.000 | 22.8 | +0.0     | +39.3    | +0.9     | -39.2 | +0.0  | 46.3   | 54.0         | -7.7   | Horiz |
|    | M         |      | +14.2    | +7.9     | +0.4     |       |       |        |              |        |       |
|    | Ave       |      |          |          |          |       |       |        | 802.11a_M    |        |       |
| ^  | 11570.000 | 35.3 | +0.0     | +39.3    | +0.9     | -39.2 | +0.0  | 58.8   | 54.0         | +4.8   | Horiz |
|    | M         |      | +14.2    | +7.9     | +0.4     |       |       |        |              |        |       |
|    |           |      |          |          |          |       |       |        | 802.11a_M    |        |       |
| 10 | 11493.400 | 21.9 | +0.0     | +39.1    | +0.9     | -39.2 | +0.0  | 45.2   | 54.0         | -8.8   | Horiz |
|    | M         |      | +14.2    | +7.9     | +0.4     |       |       |        |              |        |       |
|    | Ave       |      |          |          |          |       |       |        | 802.11a_L    |        |       |
| ^  | 11493.400 | 34.6 | +0.0     | +39.1    | +0.9     | -39.2 | +0.0  | 57.9   | 54.0         | +3.9   | Horiz |
|    | M         |      | +14.2    | +7.9     | +0.4     |       |       |        |              |        |       |
|    |           |      |          |          |          |       |       |        | 802.11a_L    |        |       |
| 12 | 11490.000 | 21.3 | +0.0     | +39.1    | +0.9     | -39.2 | +0.0  | 44.6   | 54.0         | -9.4   | Horiz |
|    | M         |      | +14.2    | +7.9     | +0.4     |       |       |        |              |        |       |
|    | Ave       |      |          |          |          |       |       |        | 802.11ac20_L |        |       |
| ^  | 11490.000 | 34.1 | +0.0     | +39.1    | +0.9     | -39.2 | +0.0  | 57.4   | 54.0         | +3.4   | Horiz |
|    | M         |      | +14.2    | +7.9     | +0.4     |       |       |        |              |        |       |
|    |           |      |          |          |          |       |       |        | 802.11ac20_L |        |       |
| 14 | 11590.000 | 20.4 | +0.0     | +39.3    | +0.9     | -39.2 | +0.0  | 44.0   | 54.0         | -10.0  | Horiz |
|    | M         |      | +14.3    | +7.9     | +0.4     |       |       |        |              |        |       |
|    | Ave       |      |          |          |          |       |       |        | 802.11ac40_H |        |       |
| ^  | 11590.000 | 34.4 | +0.0     | +39.3    | +0.9     | -39.2 | +0.0  | 58.0   | 54.0         | +4.0   | Horiz |
|    | M         |      | +14.3    | +7.9     | +0.4     |       |       |        |              |        |       |
|    |           |      |          |          |          |       |       |        | 802.11ac40_H |        |       |

|              |                       |      |               |               |              |       |      |      |      |       |       |
|--------------|-----------------------|------|---------------|---------------|--------------|-------|------|------|------|-------|-------|
| 16           | 11510.000<br>M<br>Ave | 20.5 | +0.0<br>+14.2 | +39.2<br>+7.9 | +0.9<br>+0.4 | -39.2 | +0.0 | 43.9 | 54.0 | -10.1 | Horiz |
| 802.11ac40_L |                       |      |               |               |              |       |      |      |      |       |       |
| ^            | 11510.000<br>M        | 33.1 | +0.0<br>+14.2 | +39.2<br>+7.9 | +0.9<br>+0.4 | -39.2 | +0.0 | 56.5 | 54.0 | +2.5  | Horiz |
| 802.11ac40_L |                       |      |               |               |              |       |      |      |      |       |       |
| 18           | 11550.000<br>M<br>Ave | 19.5 | +0.0<br>+14.2 | +39.2<br>+7.9 | +0.9<br>+0.4 | -39.2 | +0.0 | 42.9 | 54.0 | -11.1 | Horiz |
| 802.11ac80_M |                       |      |               |               |              |       |      |      |      |       |       |
| ^            | 11550.000<br>M        | 33.4 | +0.0<br>+14.2 | +39.2<br>+7.9 | +0.9<br>+0.4 | -39.2 | +0.0 | 56.8 | 54.0 | +2.8  | Horiz |
| 802.11ac80_M |                       |      |               |               |              |       |      |      |      |       |       |
| 20           | 1014.400M             | 54.0 | +0.0<br>+3.4  | +24.2<br>+2.1 | +0.2<br>+0.0 | -41.4 | +0.0 | 42.5 | 54.0 | -11.5 | Horiz |
| 802.11a_L    |                       |      |               |               |              |       |      |      |      |       |       |
| 21           | 1430.600M             | 53.9 | +0.0<br>+4.2  | +25.4<br>+2.5 | +0.3<br>+0.0 | -40.0 | +0.0 | 46.3 | 68.2 | -21.9 | Horiz |
| 802.11ac80_M |                       |      |               |               |              |       |      |      |      |       |       |

## Band Edge

| Band Edge Summary |                     |                        |                      |       |                   |       |         |
|-------------------|---------------------|------------------------|----------------------|-------|-------------------|-------|---------|
| Frequency (MHz)   | Modulation          | Ant. Type / Gain (dBi) | Average (dBuV/m @3m) |       | Peak (dBuV/m @3m) |       | Results |
|                   |                     |                        | Measured             | Limit | Measured          | Limit |         |
| 5460*             | 802.11a 18Mbps      | Ext/ 4.66              | 34.9                 | ≤54   | 48.2              | ≤74   | Pass    |
| 5650              | 802.11a 18Mbps      | Ext/ 4.66              | NA2                  | NA2   | 51.5              | <68.2 | Pass    |
| 5925              | 802.11a 18Mbps      | Ext/ 4.66              | NA2                  | NA2   | 48.6              | ≤68.2 | Pass    |
| 5460*             | 802.11n HT20 MCS2   | Ext/ 4.66              | 34.8                 | ≤54   | 47.6              | ≤74   | Pass    |
| 5650              | 802.11n HT20 MCS2   | Ext/ 4.66              | NA2                  | NA2   | 51.0              | <68.2 | Pass    |
| 5925              | 802.11n HT20 MCS2   | Ext/ 4.66              | NA2                  | NA2   | 48.0              | ≤68.2 | Pass    |
| 5460*             | 802.11n HT40 MCS0   | Ext/ 4.66              | 34.8                 | ≤54   | 47.9              | ≤74   | Pass    |
| 5650              | 802.11n HT40 MCS0   | Ext/ 4.66              | NA2                  | NA2   | 50.9              | <68.2 | Pass    |
| 5925              | 802.11n HT40 MCS0   | Ext/ 4.66              | NA2                  | NA2   | 47.8              | ≤68.2 | Pass    |
| 5460*             | 802.11ac 40MHz MCS0 | Ext/ 4.66              | 34.8                 | ≤54   | 48.0              | ≤74   | Pass    |
| 5650              | 802.11ac 40MHz MCS0 | Ext/ 4.66              | NA2                  | NA2   | 50.2              | <68.2 | Pass    |
| 5925              | 802.11ac 40MHz MCS0 | Ext/ 4.66              | NA2                  | NA2   | 49.1              | ≤68.2 | Pass    |
| 5460*             | 802.11ac 80MHz MCS1 | Ext/ 4.66              | 34.7                 | ≤54   | 48.4              | ≤74   | Pass    |
| 5650              | 802.11ac 80MHz MCS1 | Ext/ 4.66              | NA2                  | NA2   | 48.6              | <68.2 | Pass    |
| 5925              | 802.11ac 80MHz MCS1 | Ext/ 4.66              | NA2                  | NA2   | 47.6              | ≤68.2 | Pass    |



\*Restricted band edge

15.407(b)(4) (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



-27dBm/MHz = 68.2dBuV/m@3m

## Band Edge Plots



802.11a

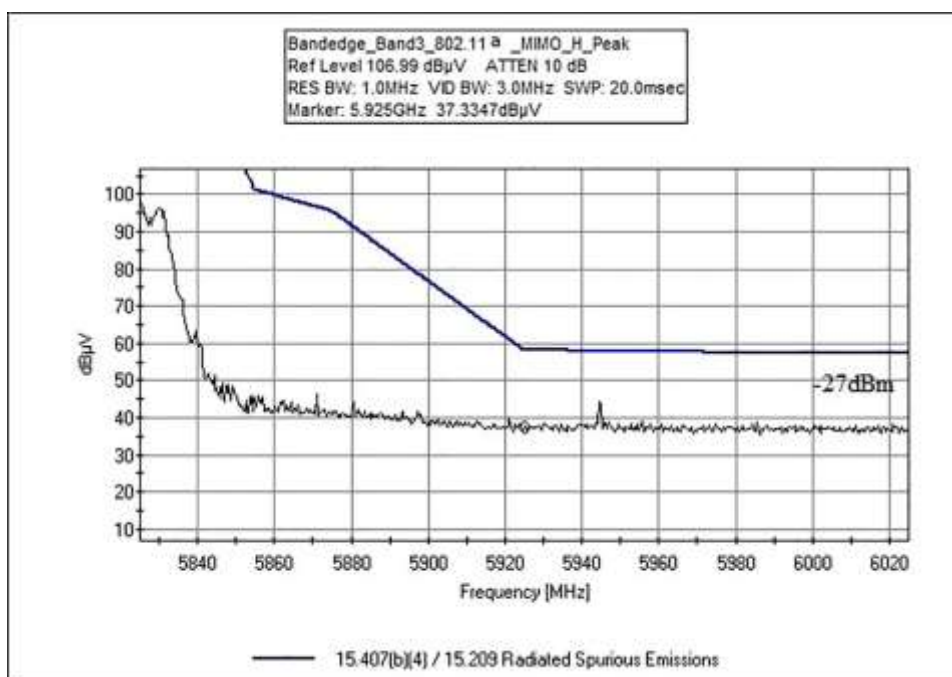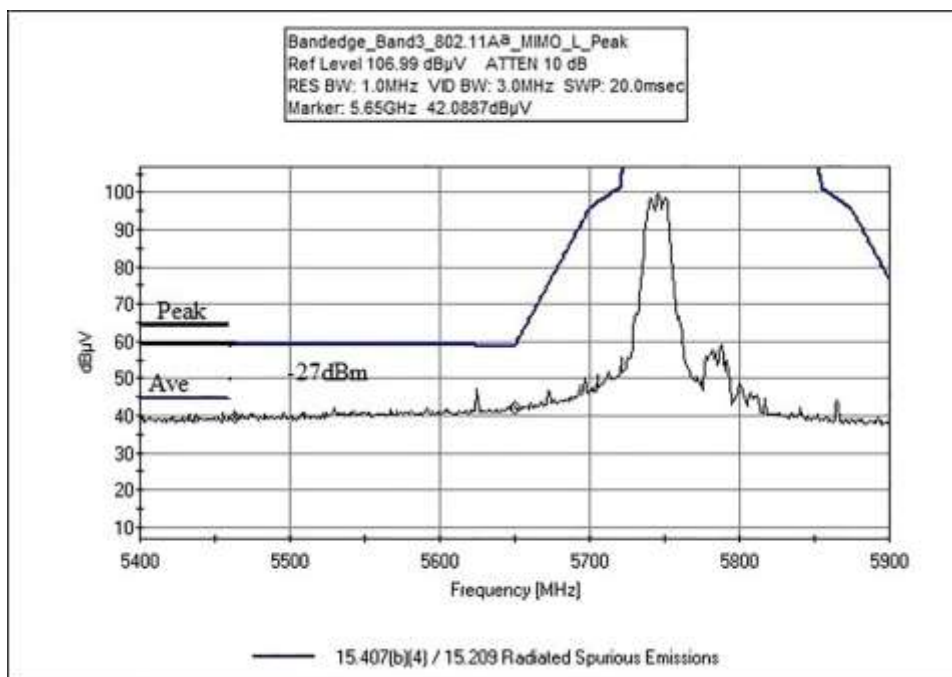



802.11n20

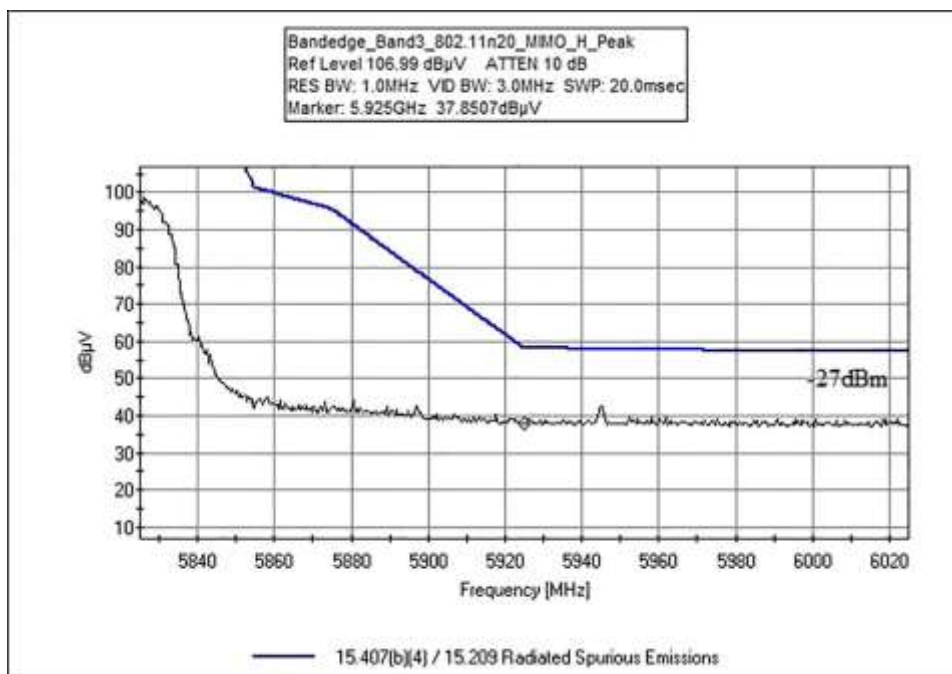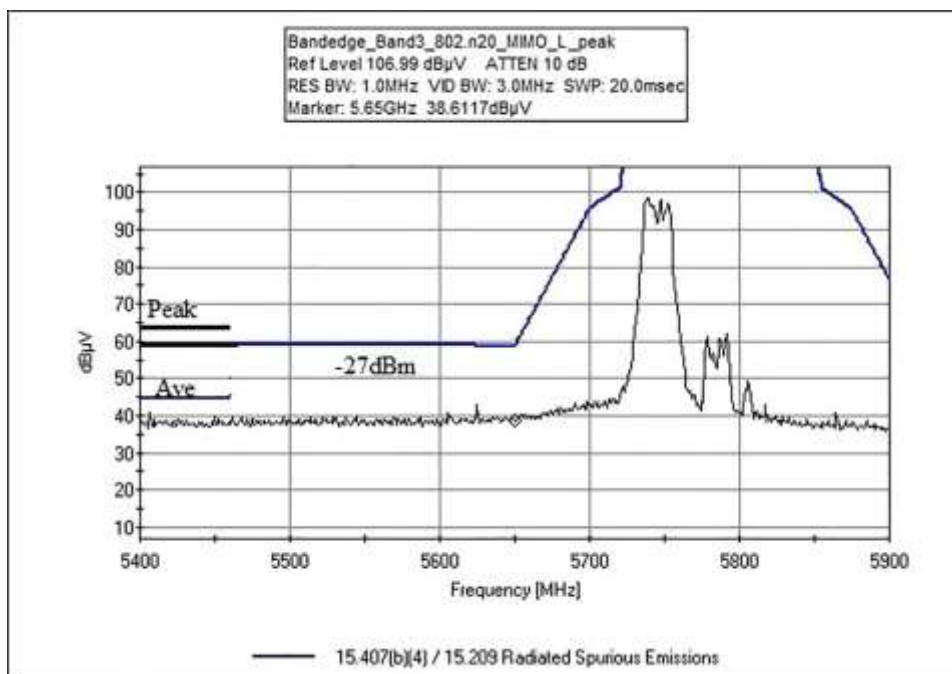



802.11ac20

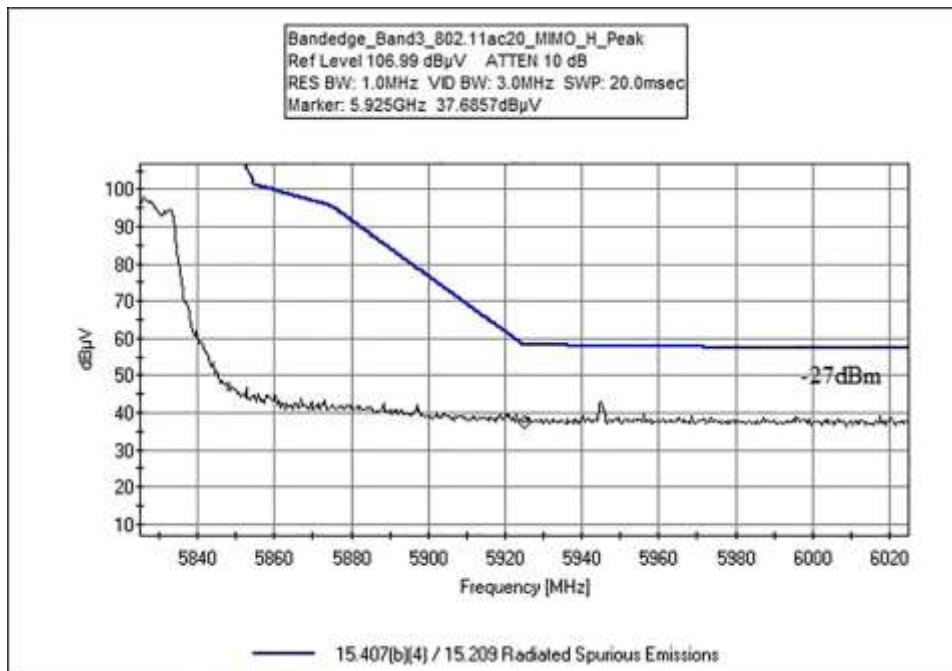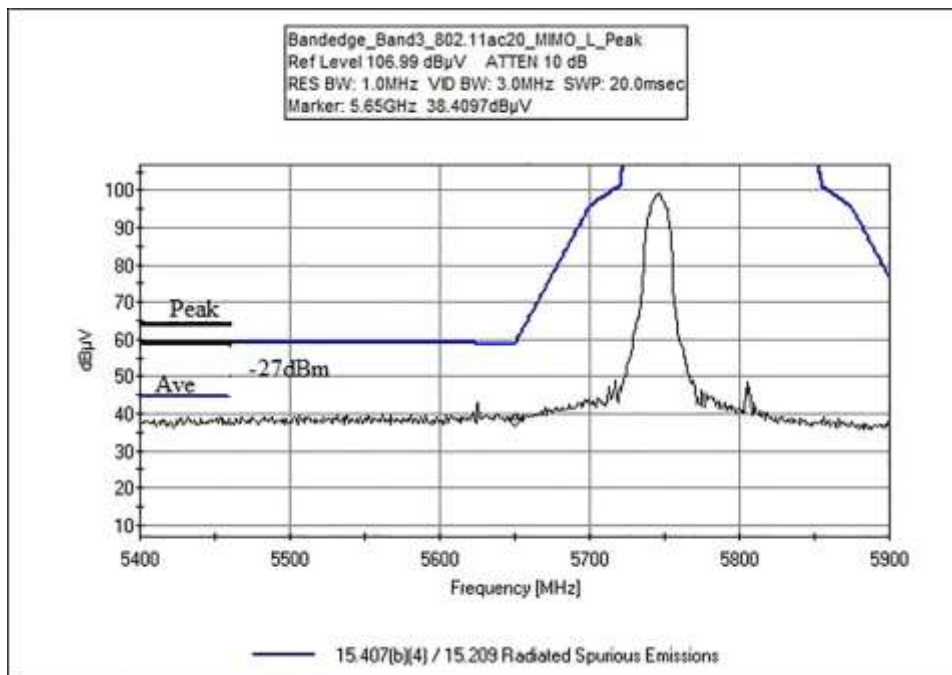



802.11n40

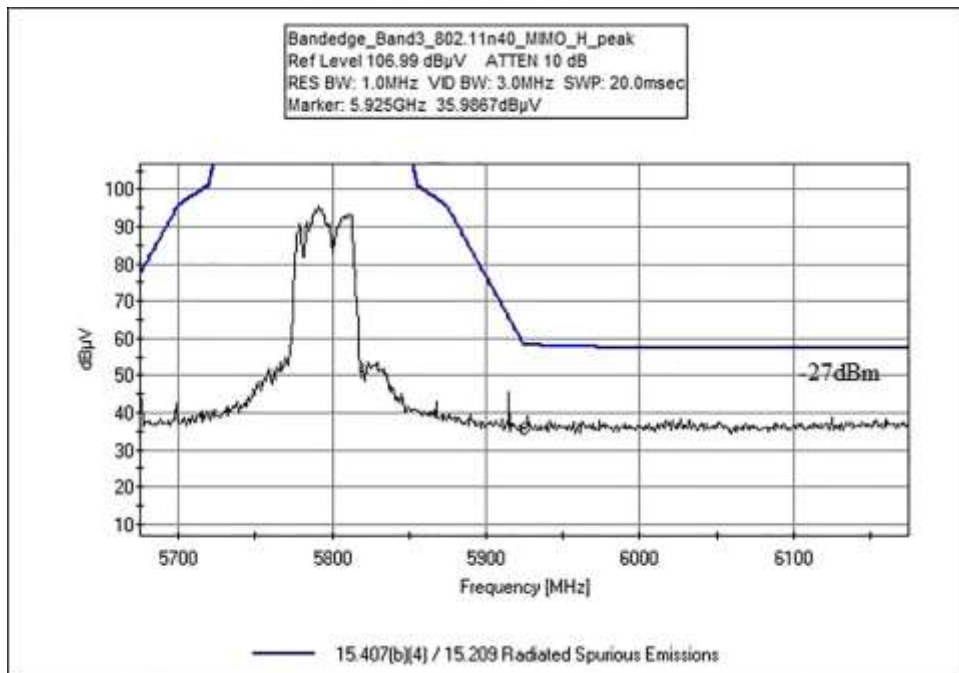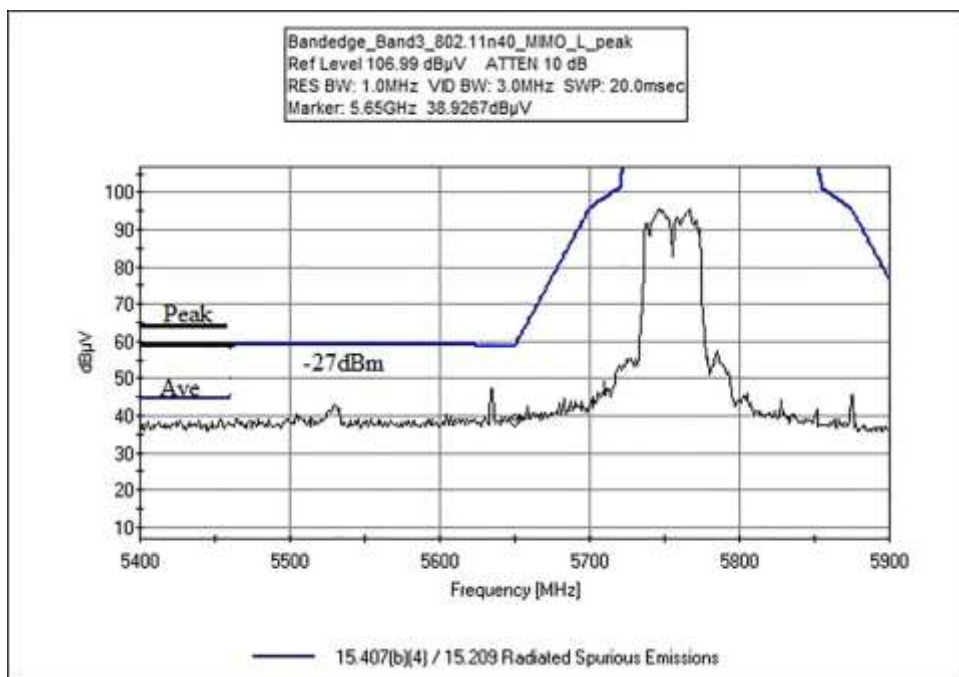

802.11ac40

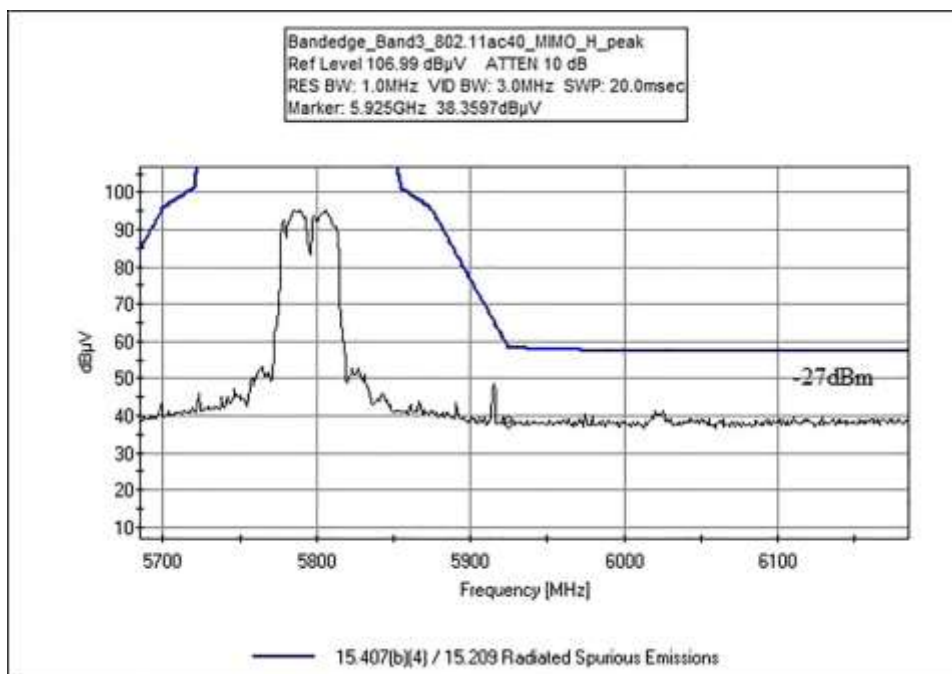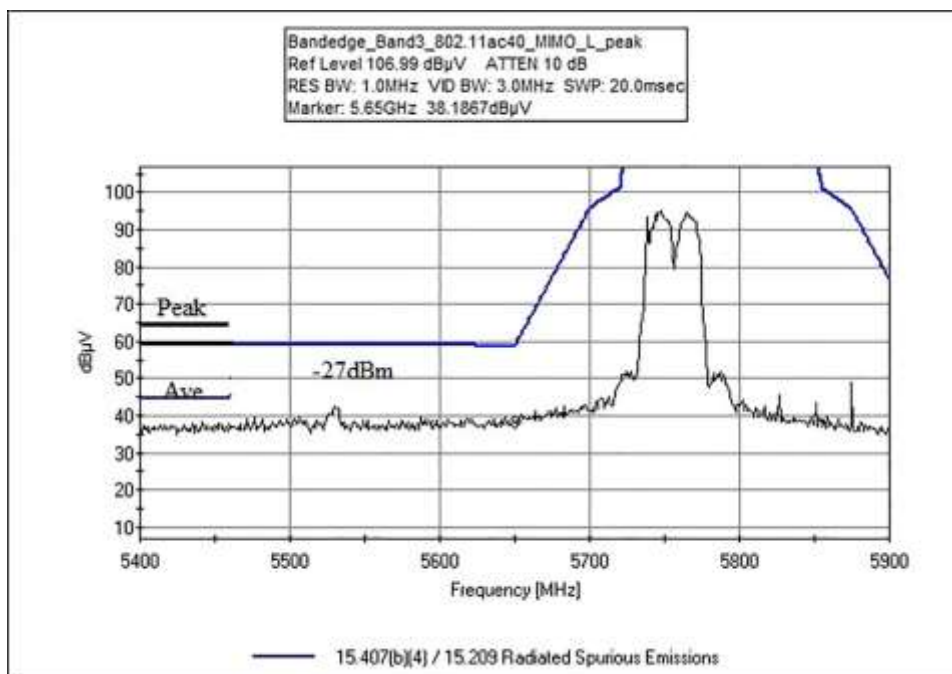

802.11ac80

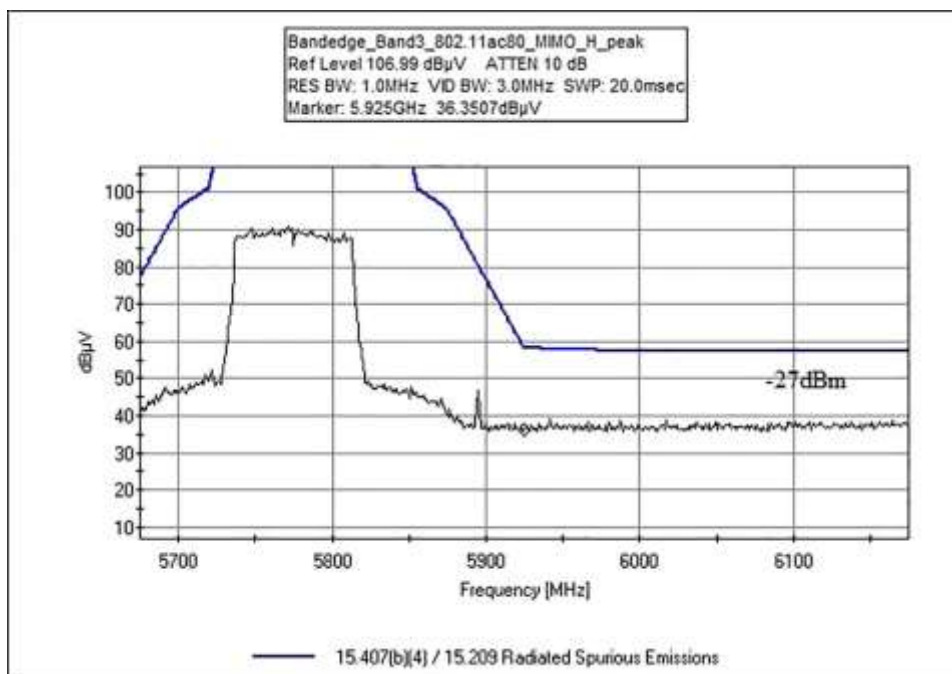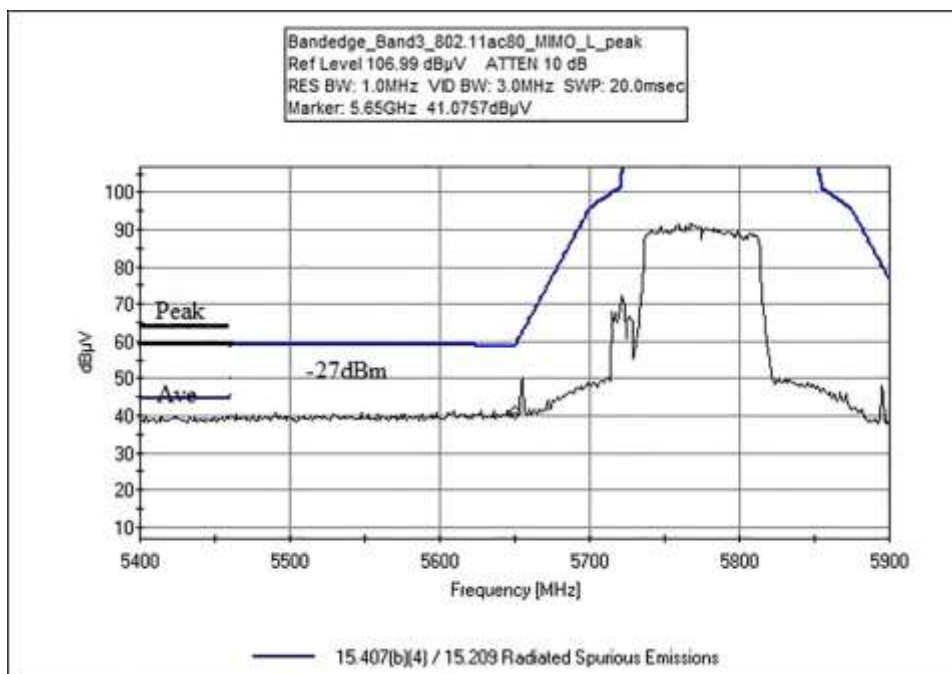

## Band Edge Data

Test Location: CKC Laboratories, Inc • 110 N. Olinda Place • Brea, CA • 714 993 6112  
 Customer: **Tonal**  
 Specification: **15.407(b)(4) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **110825** Date: 1/10/2025  
 Test Type: **Radiated Scan** Time: 15:17:30  
 Tested By: E. Wong Sequence#: 4  
 Software: EMITest 5.03.20

### Equipment Tested:

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

### Support Equipment:

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

### Test Conditions / Notes:

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Condition #1</p> <p>Frequency range of measurement = Bandedge<br/>RBW=1MHz, VBW=3 MHz.</p> <p>Test Environment Conditions:<br/>Temperature: 20°C<br/>Humidity: 34%<br/>Pressure: 100kPa</p> <p><b>Modification 1 (MOD1) was in place during testing:</b><br/>Reduce RF output power to 12dBm in the software for 802.11n HT40 Chain 0.<br/>Added a ferrite (Würth: 742 712 21) on lower resistor wire. Green Resistor</p> <p>Site D<br/>ANSI C63.10-2020</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Test Equipment:

| ID | Asset #  | Description       | Model                        | Calibration Date | Cal Due Date |
|----|----------|-------------------|------------------------------|------------------|--------------|
| T1 | AN03834  | Spectrum Analyzer | E4448A                       | 5/6/2024         | 5/6/2026     |
| T2 | AN01646  | Horn Antenna      | 3115                         | 3/8/2024         | 3/8/2026     |
| T3 | ANP07660 | Cable             | 32022-29094K-<br>29094K-24TC | 7/20/2024        | 7/20/2026    |
| T4 | AN00787  | Preamp            | 83017A                       | 6/27/2023        | 6/27/2025    |
| T5 | ANP04382 | Cable             | LDF-50                       | 6/4/2024         | 6/4/2026     |
| T6 | ANP08191 | Cable             | ANDL1-<br>PNMNM-50           | 11/11/2024       | 11/11/2026   |



**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| #  | Freq<br>MHz      | Rdng<br>dBμV | T1<br>T5<br>dB | T2<br>T6<br>dB | T3<br>dB | T4<br>dB | Dist<br>Table | Corr<br>dBμV/m | Spec<br>dBμV/m                 | Margin<br>dB | Polar<br>Ant |
|----|------------------|--------------|----------------|----------------|----------|----------|---------------|----------------|--------------------------------|--------------|--------------|
| 1  | 5650.000M        | 42.1         | +0.0<br>+9.0   | +34.0<br>+5.2  | +0.6     | -39.4    | +0.0          | 51.5           | 68.2<br>802.11a_Bandedge_L2    | -16.7        | Horiz        |
| 2  | 5650.000M        | 41.6         | +0.0<br>+9.0   | +34.0<br>+5.2  | +0.6     | -39.4    | +0.0          | 51.0           | 68.2<br>802.11n20_Bandedge_L2  | -17.2        | Horiz        |
| 3  | 5650.000M        | 41.5         | +0.0<br>+9.0   | +34.0<br>+5.2  | +0.6     | -39.4    | +0.0          | 50.9           | 68.2<br>802.11n40_Bandedge_L2  | -17.3        | Horiz        |
| 4  | 5650.000M        | 40.8         | +0.0<br>+9.0   | +34.0<br>+5.2  | +0.6     | -39.4    | +0.0          | 50.2           | 68.2<br>802.11ac40_Bandedge_L2 | -18.0        | Horiz        |
| 5  | 5650.000M        | 40.6         | +0.0<br>+9.0   | +34.0<br>+5.2  | +0.6     | -39.4    | +0.0          | 50.0           | 68.2<br>802.11ac20_Bandedge_L2 | -18.2        | Horiz        |
| 6  | 5460.000M<br>Ave | 25.9         | +0.0<br>+8.8   | +34.0<br>+5.0  | +0.6     | -39.4    | +0.0          | 34.9           | 54.0<br>802.11a_Bandedge_L     | -19.1        | Horiz        |
| 7  | 5925.000M        | 39.1         | +0.0<br>+9.4   | +34.0<br>+5.4  | +0.6     | -39.4    | +0.0          | 49.1           | 68.2<br>802.11ac20_Bandedge_H  | -19.1        | Horiz        |
| 8  | 5925.000M        | 39.1         | +0.0<br>+9.4   | +34.0<br>+5.4  | +0.6     | -39.4    | +0.0          | 49.1           | 68.2<br>802.11ac40_Bandedge_H  | -19.1        | Horiz        |
| 9  | 5460.000M<br>Ave | 25.8         | +0.0<br>+8.8   | +34.0<br>+5.0  | +0.6     | -39.4    | +0.0          | 34.8           | 54.0<br>802.11n20_Bandedge_L   | -19.2        | Horiz        |
| 10 | 5460.000M<br>Ave | 25.8         | +0.0<br>+8.8   | +34.0<br>+5.0  | +0.6     | -39.4    | +0.0          | 34.8           | 54.0<br>802.11ac40_Bandedge_L  | -19.2        | Horiz        |
| 11 | 5460.000M<br>Ave | 25.8         | +0.0<br>+8.8   | +34.0<br>+5.0  | +0.6     | -39.4    | +0.0          | 34.8           | 54.0<br>802.11ac20_Bandedge_L  | -19.2        | Horiz        |
| 12 | 5460.000M<br>Ave | 25.8         | +0.0<br>+8.8   | +34.0<br>+5.0  | +0.6     | -39.4    | +0.0          | 34.8           | 54.0<br>802.11n40_Bandedge_L   | -19.2        | Horiz        |

|    |                  |      |              |               |      |       |      |      |                                   |       |       |
|----|------------------|------|--------------|---------------|------|-------|------|------|-----------------------------------|-------|-------|
| 13 | 5460.000M<br>Ave | 25.7 | +0.0<br>+8.8 | +34.0<br>+5.0 | +0.6 | -39.4 | +0.0 | 34.7 | 54.0<br>802.11ac80_Band<br>dge_L  | -19.3 | Horiz |
| ^  | 5460.000M        | 39.4 | +0.0<br>+8.8 | +34.0<br>+5.0 | +0.6 | -39.4 | +0.0 | 48.4 | 54.0<br>802.11ac80_Band<br>dge_L  | -5.6  | Horiz |
| ^  | 5460.000M        | 39.2 | +0.0<br>+8.8 | +34.0<br>+5.0 | +0.6 | -39.4 | +0.0 | 48.2 | 54.0<br>802.11a_Bandedge<br>_L    | -5.8  | Horiz |
| ^  | 5460.000M        | 39.0 | +0.0<br>+8.8 | +34.0<br>+5.0 | +0.6 | -39.4 | +0.0 | 48.0 | 54.0<br>802.11ac40_Band<br>dge_L  | -6.0  | Horiz |
| ^  | 5460.000M        | 38.9 | +0.0<br>+8.8 | +34.0<br>+5.0 | +0.6 | -39.4 | +0.0 | 47.9 | 54.0<br>802.11n40_Banded<br>ge_L  | -6.1  | Horiz |
| ^  | 5460.000M        | 38.8 | +0.0<br>+8.8 | +34.0<br>+5.0 | +0.6 | -39.4 | +0.0 | 47.8 | 54.0<br>802.11ac20_Band<br>dge_L  | -6.2  | Horiz |
| ^  | 5460.000M        | 38.6 | +0.0<br>+8.8 | +34.0<br>+5.0 | +0.6 | -39.4 | +0.0 | 47.6 | 54.0<br>802.11n20_Banded<br>ge_L  | -6.4  | Horiz |
| 20 | 5640.000M        | 39.2 | +0.0<br>+9.0 | +34.0<br>+5.2 | +0.6 | -39.4 | +0.0 | 48.6 | 68.2<br>802.11ac80_Band<br>dge_L2 | -19.6 | Horiz |
| 21 | 5925.000M        | 38.6 | +0.0<br>+9.4 | +34.0<br>+5.4 | +0.6 | -39.4 | +0.0 | 48.6 | 68.2<br>802.11a_Bandedge<br>_H    | -19.6 | Horiz |
| 22 | 5925.000M        | 38.0 | +0.0<br>+9.4 | +34.0<br>+5.4 | +0.6 | -39.4 | +0.0 | 48.0 | 68.2<br>802.11n20_Banded<br>ge_H  | -20.2 | Horiz |
| 23 | 5925.000M        | 37.8 | +0.0<br>+9.4 | +34.0<br>+5.4 | +0.6 | -39.4 | +0.0 | 47.8 | 68.2<br>802.11n40_Banded<br>ge_H  | -20.4 | Horiz |
| 24 | 5925.000M        | 37.6 | +0.0<br>+9.4 | +34.0<br>+5.4 | +0.6 | -39.4 | +0.0 | 47.6 | 68.2<br>802.11ac80_Band<br>dge_H  | -20.6 | Horiz |

**Test Setup Photo(s)**



Below 1GHz, View 1



Below 1GHz, View 2



Above 1GHz, View 1



Above 1GHz, View 2

## APPENDIX A: MODIFICATIONS MADE DURING TESTING

### Modification 1 (MOD1)

Reduce RF output power to 12dBm in the software for 802.11n HT40 Chain 0

Added a ferrite (Würth: 742 712 21) on lower resistor wire

Green Resistor

### Test Setup Photo(s)



## Supplemental Information

### Measurement Uncertainty

| Uncertainty Value      | Parameter                 |
|------------------------|---------------------------|
| 5.77 dB                | Radiated Emissions        |
| 0.673 dB               | RF Conducted Measurements |
| $5.77 \times 10^{-10}$ | Frequency Deviation       |
| 0.00005 s              | Time Deviation            |
| 3.18 dB                | Mains Conducted Emissions |

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ . Compliance is deemed to occur provided measurements are below the specified limits.

### Emissions Test Details

#### TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

#### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in  $\text{dB}\mu\text{V}/\text{m}$ , the spectrum analyzer reading in  $\text{dB}\mu\text{V}$  was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

| SAMPLE CALCULATIONS |                     |                                     |
|---------------------|---------------------|-------------------------------------|
|                     | Meter reading       | ( $\text{dB}\mu\text{V}$ )          |
| +                   | Antenna Factor      | ( $\text{dB}/\text{m}$ )            |
| +                   | Cable Loss          | ( $\text{dB}$ )                     |
| -                   | Distance Correction | ( $\text{dB}$ )                     |
| -                   | Preamplifier Gain   | ( $\text{dB}$ )                     |
| =                   | Corrected Reading   | ( $\text{dB}\mu\text{V}/\text{m}$ ) |

#### TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

| MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE |                     |                  |                   |
|------------------------------------------------------------|---------------------|------------------|-------------------|
| TEST                                                       | BEGINNING FREQUENCY | ENDING FREQUENCY | BANDWIDTH SETTING |
| CONDUCTED EMISSIONS                                        | 150 kHz             | 30 MHz           | 9 kHz             |
| RADIATED EMISSIONS                                         | 9 kHz               | 150 kHz          | 200 Hz            |
| RADIATED EMISSIONS                                         | 150 kHz             | 30 MHz           | 9 kHz             |
| RADIATED EMISSIONS                                         | 30 MHz              | 1000 MHz         | 120 kHz           |
| RADIATED EMISSIONS                                         | 1000 MHz            | >1 GHz           | 1 MHz             |

#### SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

##### Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

##### Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

##### Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.

**\*End of Report\***