

# FCC TEST REPORT

Client Name : Shenzhen Three Bees E-Commerce Co., Ltd.  
Address : Building A, Jianjin Industrial Park Donghuan 2nd Road,  
Longhua Street Shenzhen China 518000  
Product Name : Fast Wireless Charger Stand  
Date : Feb. 26, 2021



**Shenzhen Anbotek Compliance Laboratory Limited**

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	8
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Antenna Requirement.....	22
5.1. Test Standard and Requirement.....	22
5.2. Antenna Connected Construction.....	22
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	23
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	25
APPENDIX III -- INTERNAL PHOTOGRAPH.....	28

# TEST REPORT

Applicant : Shenzhen Three Bees E-Commerce Co., Ltd.

Manufacturer : Shenzhen Three Bees E-Commerce Co., Ltd.

Product Name : Fast Wireless Charger Stand

Model No. : M240, M240S, M260, M260S

Trade Mark : NANAMI

Rating(s) : Input: DC 5V-2A, 9V-2A, 12V-1.5A  
Output : 5W, 7.5W, 10W, 15W

**Test Standard(s) : FCC Part15 Subpart C 2019, Paragraph 15.209**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Jan. 27, 2021

Date of Test

Jan. 27~Feb. 22, 2021

Prepared By

*Yilia Zhong*

(Engineer / Yilia Zhong)

Reviewer

*Bibo Zhang*

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

*Kingkong Jin*

(Manager / Kingkong Jin)

## 1. General Information

### 1.1. Client Information

Applicant	:	Shenzhen Three Bees E-Commerce Co., Ltd.
Address	:	Building A, Jianjin Industrial Park Donghuan 2nd Road, Longhua Street Shenzhen China 518000
Manufacturer	:	Shenzhen Three Bees E-Commerce Co., Ltd.
Address	:	Building A, Jianjin Industrial Park Donghuan 2nd Road, Longhua Street Shenzhen China 518000
Factory	:	Shenzhen Three Bees E-Commerce Co., Ltd.
Address	:	Building A, Jianjin Industrial Park Donghuan 2nd Road, Longhua Street Shenzhen China 518000

### 1.2. Description of Device (EUT)

Product Name	:	Fast Wireless Charger Stand	
Model No.	:	M240, M240S, M260, M260S (Note: All samples are the same except the model number, so we prepare "M240" for test only.)	
Trade Mark	:	NANAMI	
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-1(Engineering Sample)	
Product Description	:	Operation Frequency:	110.1-205KHz
		Modulation Type:	FSK
		Antenna Type:	Inductive loop coil Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: A2013 Input: 100-240V-0.7A 50-60Hz Output: 3.6-5.5V $\equiv$ 3A / 6.5-9V $\equiv$ 2A / 9-12V $\equiv$ 1.5A
---------	---	---

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Wireless charging Mode



For Conducted Emission	
Final Test Mode	Description
Mode 1	Wireless Charge Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Wireless charging Mode

Note: (1)Test channel is 0.1241MHz.

(2)All the situation(full load, half load and empty load) has been tested,only the worst situation (full load, Wireless Output: 15W) was recorded in the report.

## 1.5. Description Of Test Setup

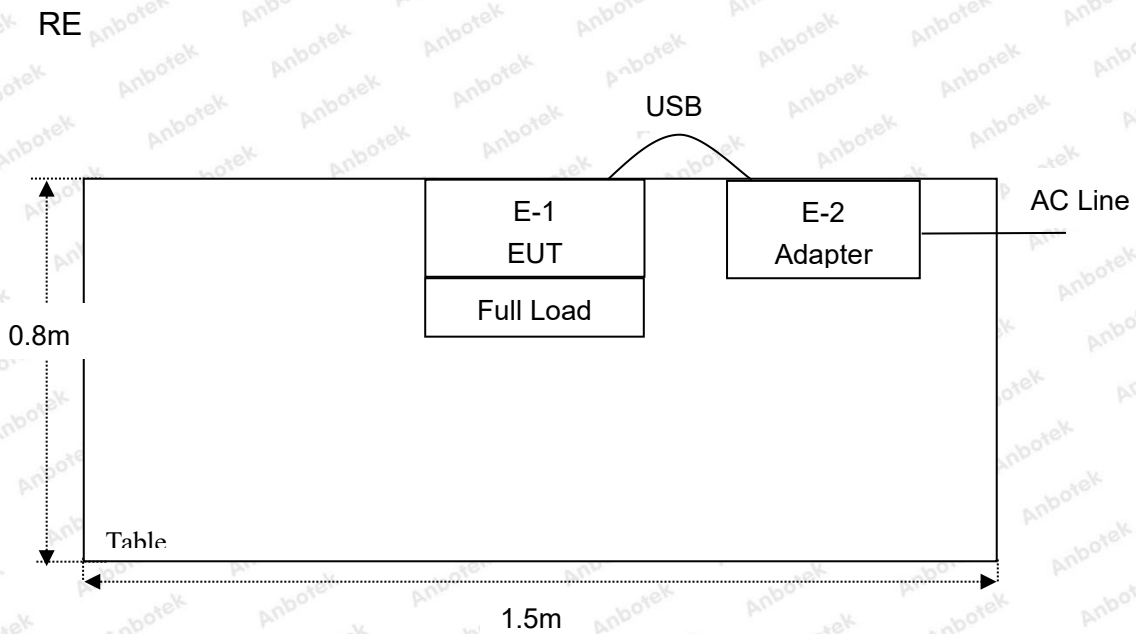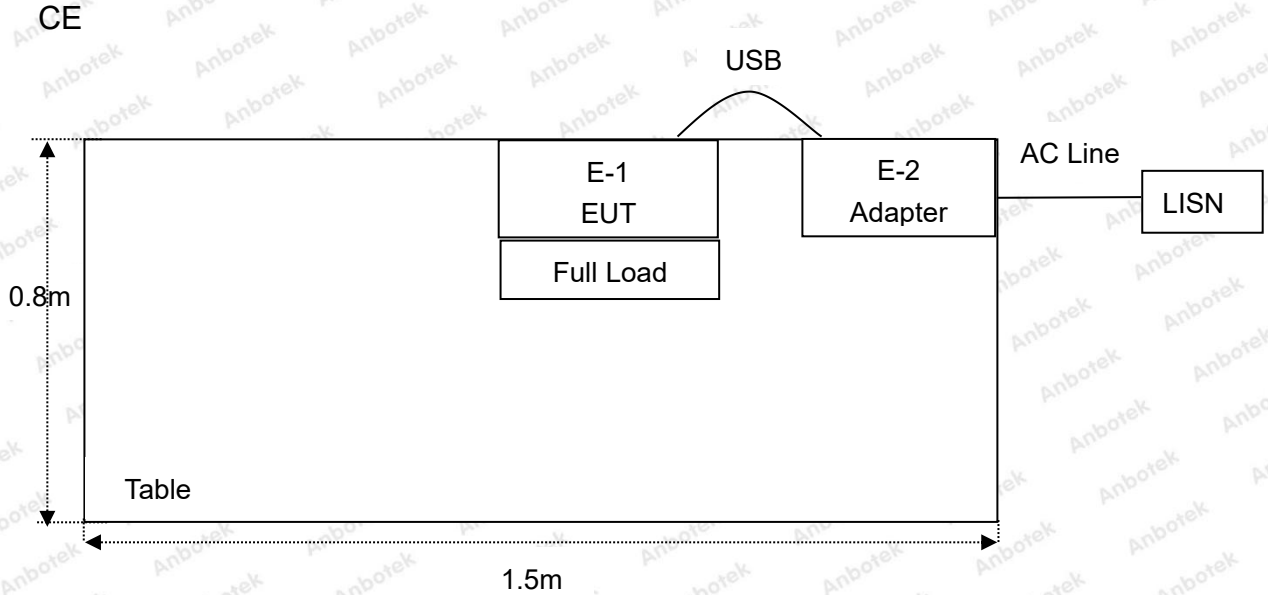

## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Oct. 26, 2020	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
9.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
10.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
13.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 26, 2020	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
18.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

### 1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

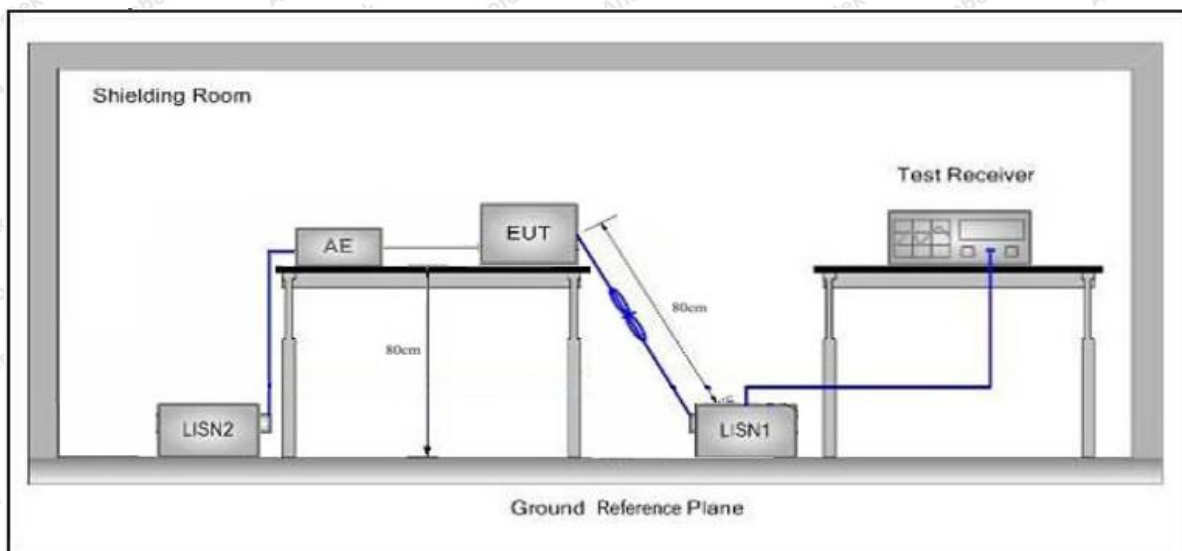

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data

Please to see the following pages

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 26°C Hum.: 53%

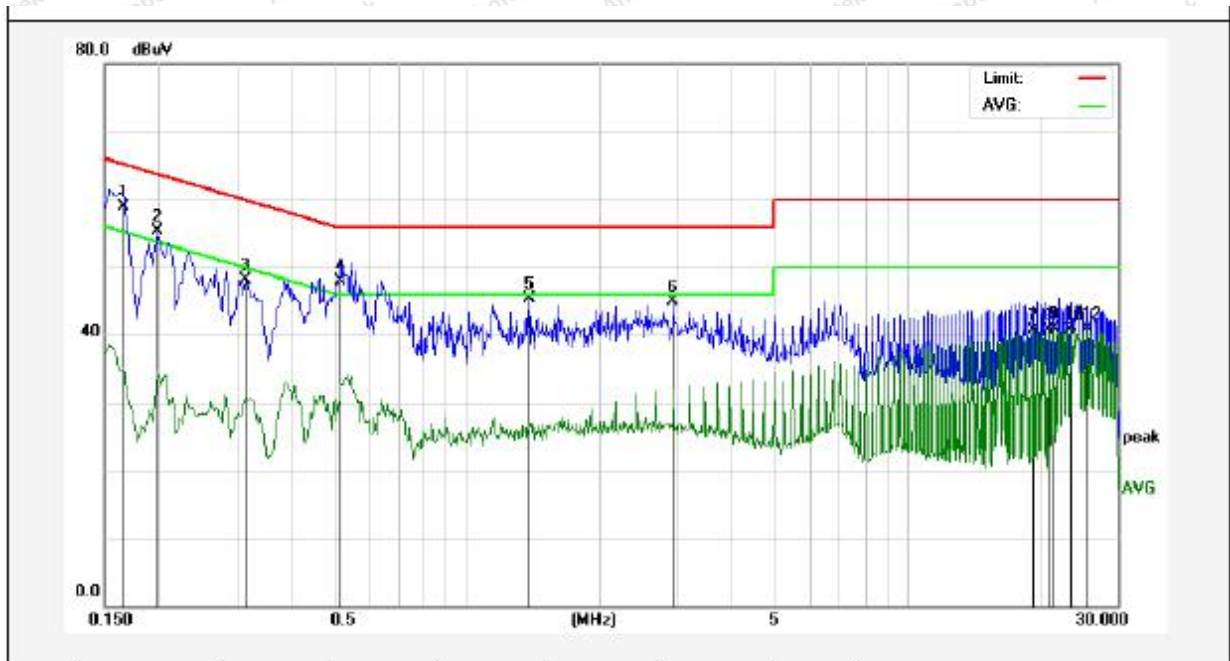

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1660	39.06	19.90	58.96	65.15	-6.19	QP	
2	0.1980	35.39	19.90	55.29	63.69	-8.40	QP	
3	0.3140	28.20	19.90	48.10	59.86	-11.76	QP	
4	0.5180	27.85	19.99	47.84	56.00	-8.16	QP	
5	1.3820	25.09	20.13	45.22	56.00	-10.78	QP	
6	2.9380	24.65	20.16	44.81	56.00	-11.19	QP	
7	19.2900	20.40	20.33	40.73	50.00	-9.27	AVG	
8	20.8220	20.47	20.33	40.80	50.00	-9.20	AVG	
9	21.5900	20.66	20.32	40.98	50.00	-9.02	AVG	
10	23.3779	20.36	20.30	40.66	50.00	-9.34	AVG	
11	23.6340	20.72	20.30	41.02	50.00	-8.98	AVG	
12	25.6780	20.53	20.28	40.81	50.00	-9.19	AVG	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 26°C Hum.: 53%

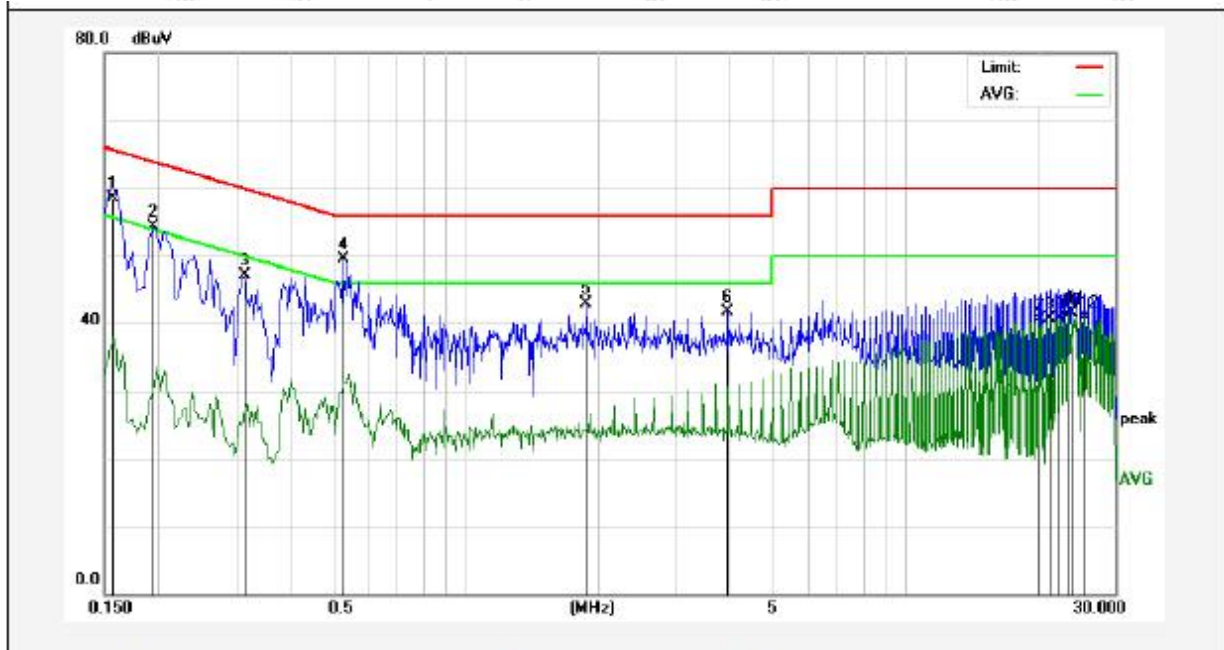

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	38.69	19.90	58.59	65.56	-6.97	QP	
2	0.1940	34.45	19.90	54.35	63.86	-9.51	QP	
3	0.3140	27.12	19.90	47.02	59.86	-12.84	QP	
4	0.5260	29.58	19.99	49.57	56.00	-6.43	QP	
5	1.8780	22.76	20.14	42.90	56.00	-13.10	QP	
6	3.9580	21.55	20.18	41.73	56.00	-14.27	QP	
7	20.0580	20.17	20.34	40.51	50.00	-9.49	AVG	
8	21.3340	20.30	20.32	40.62	50.00	-9.38	AVG	
9	22.3580	20.37	20.31	40.68	50.00	-9.32	AVG	
10	23.3779	20.93	20.30	41.23	50.00	-8.77	AVG	
11	23.8900	21.12	20.29	41.41	50.00	-8.59	AVG	
12	25.6780	20.67	20.28	40.95	50.00	-9.05	AVG	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 26°C Hum.: 53%

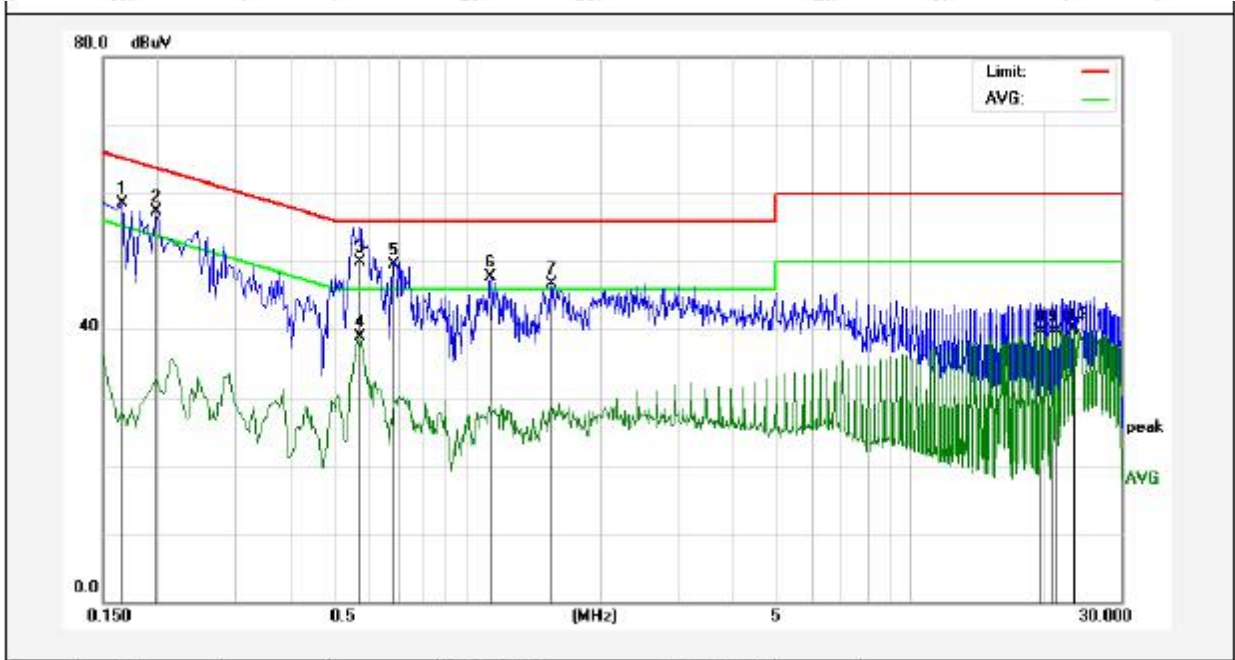

No.	Freq. (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Over Limit (dB)	Detector	Remark
1	0.1660	38.61	19.90	58.51	65.15	-6.64	QP	
2	0.1980	37.40	19.90	57.30	63.69	-6.39	QP	
3	0.5740	29.87	20.00	49.87	56.00	-6.13	QP	
4	0.5740	18.86	20.00	38.86	46.00	-7.14	AVG	
5	0.6860	29.42	20.04	49.46	56.00	-6.54	QP	
6	1.1260	27.65	20.12	47.77	56.00	-8.23	QP	
7	1.5580	26.51	20.13	46.64	56.00	-9.36	QP	
8	19.8020	19.37	20.34	39.71	50.00	-10.29	AVG	
9	21.0780	19.38	20.33	39.71	50.00	-10.29	AVG	
10	21.5900	19.39	20.32	39.71	50.00	-10.29	AVG	
11	23.3779	19.61	20.30	39.91	50.00	-10.09	AVG	
12	23.6340	19.76	20.30	40.06	50.00	-9.94	AVG	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 26°C Hum.: 53%

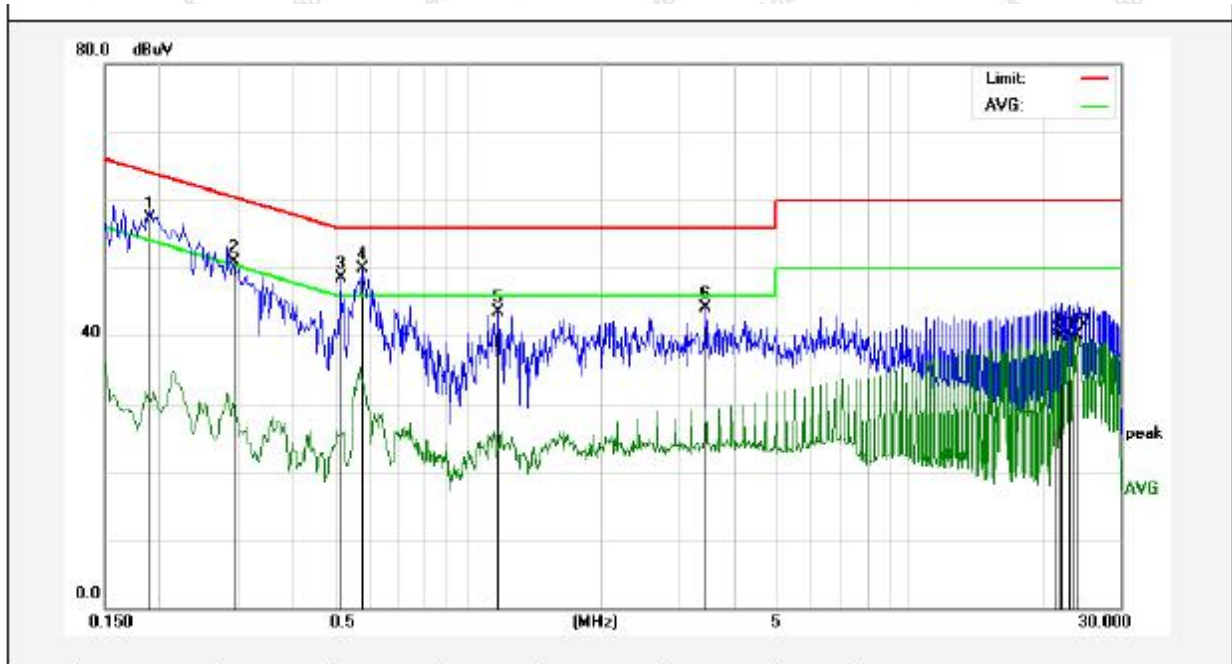

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1900	37.45	19.90	57.35	64.03	-6.68	QP	
2	0.2940	30.97	19.89	50.86	60.41	-9.55	QP	
3	0.5140	28.50	19.98	48.48	56.00	-7.52	QP	
4	0.5780	29.88	20.00	49.88	56.00	-6.12	QP	
5	1.1660	23.37	20.12	43.49	56.00	-12.51	QP	
6	3.4500	23.85	20.17	44.02	56.00	-11.98	QP	
7	21.5900	19.89	20.32	40.21	50.00	-9.79	AVG	
8	21.8460	19.67	20.32	39.99	50.00	-10.01	AVG	
9	22.1020	19.53	20.31	39.84	50.00	-10.16	AVG	
10	23.1220	19.38	20.30	39.68	50.00	-10.32	AVG	
11	23.3779	19.33	20.30	39.63	50.00	-10.37	AVG	
12	23.8900	19.73	20.29	40.02	50.00	-9.98	AVG	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

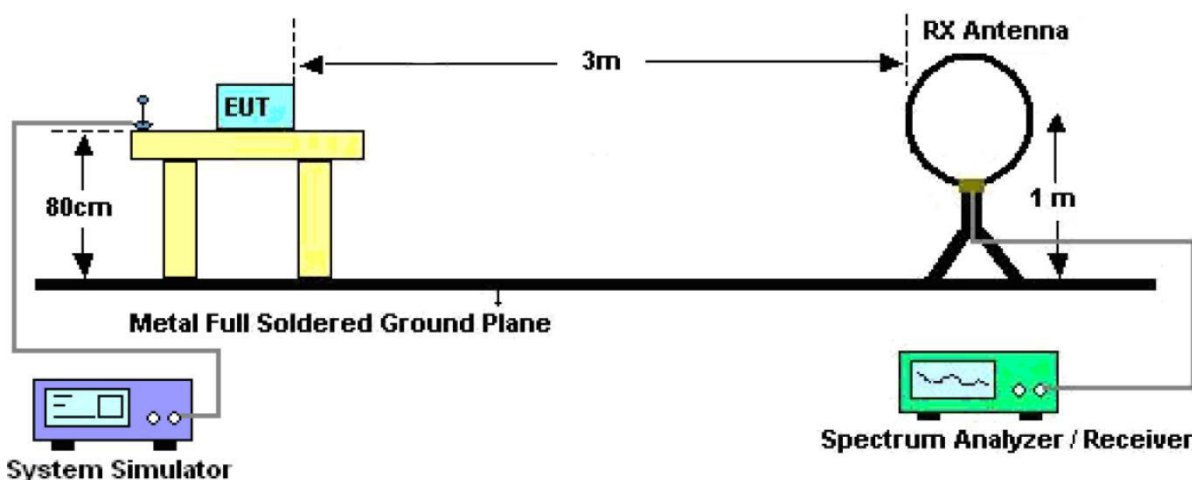


Figure 1. Below 30MHz

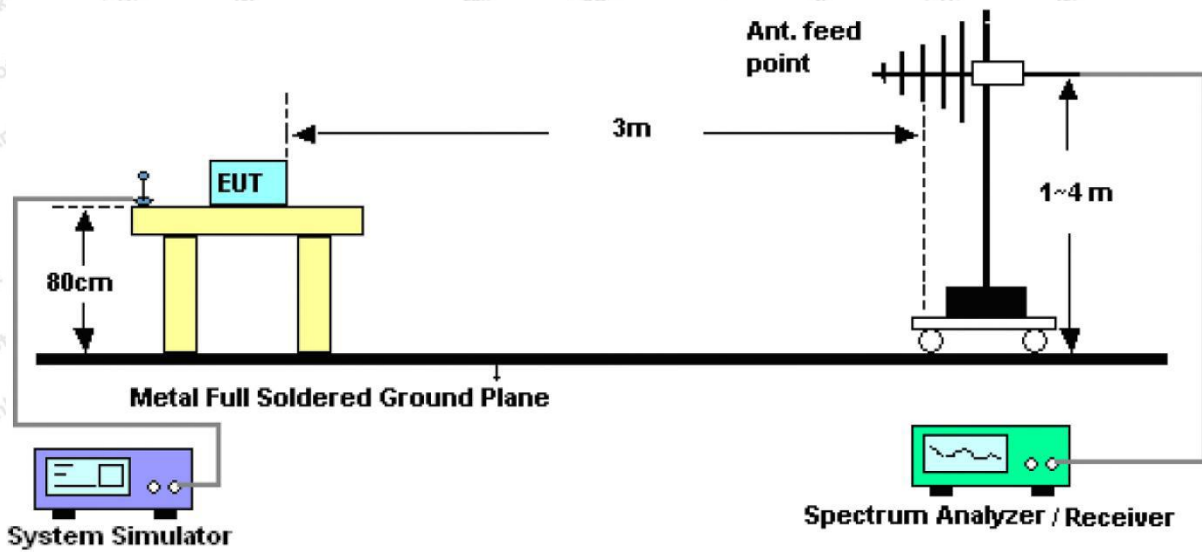


Figure 2. 30MHz to 1GHz

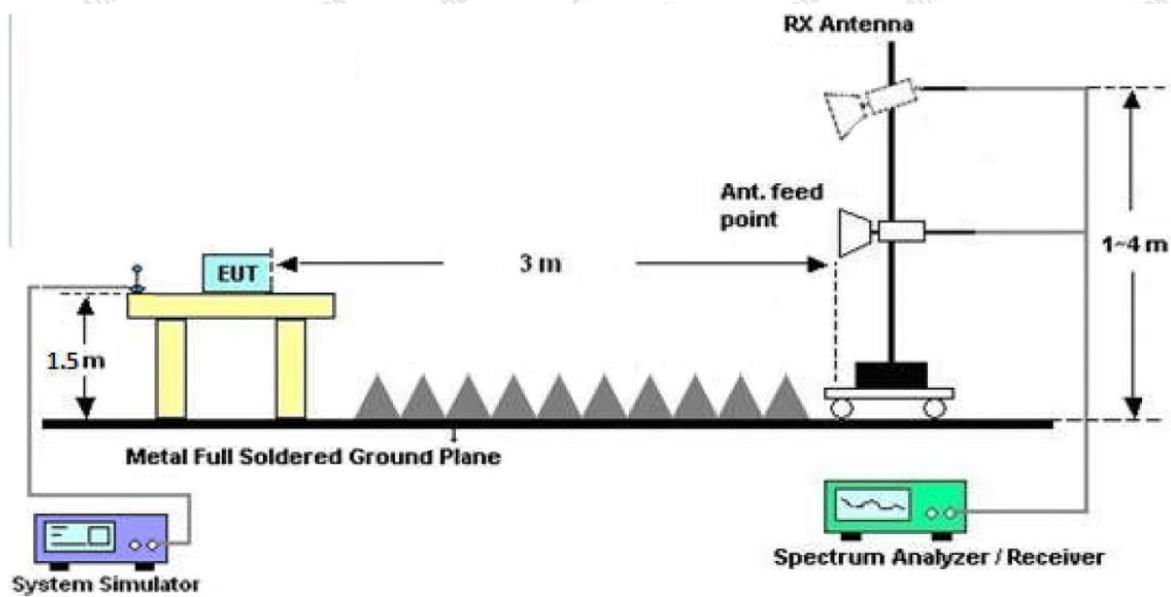


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.



Report No.: 18220WC10018301

FCC ID: 2AXMG-M240

Page 17 of 30

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


#### 4.4. Test Data

**PASS**

Note: The data is in TX mode, and this is the worst mode.

**Test Results (9K~0.15MHz)**

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Temp.(°C)/Hum.(%RH): 22.4°C/50%RH  
 Distance: 3m

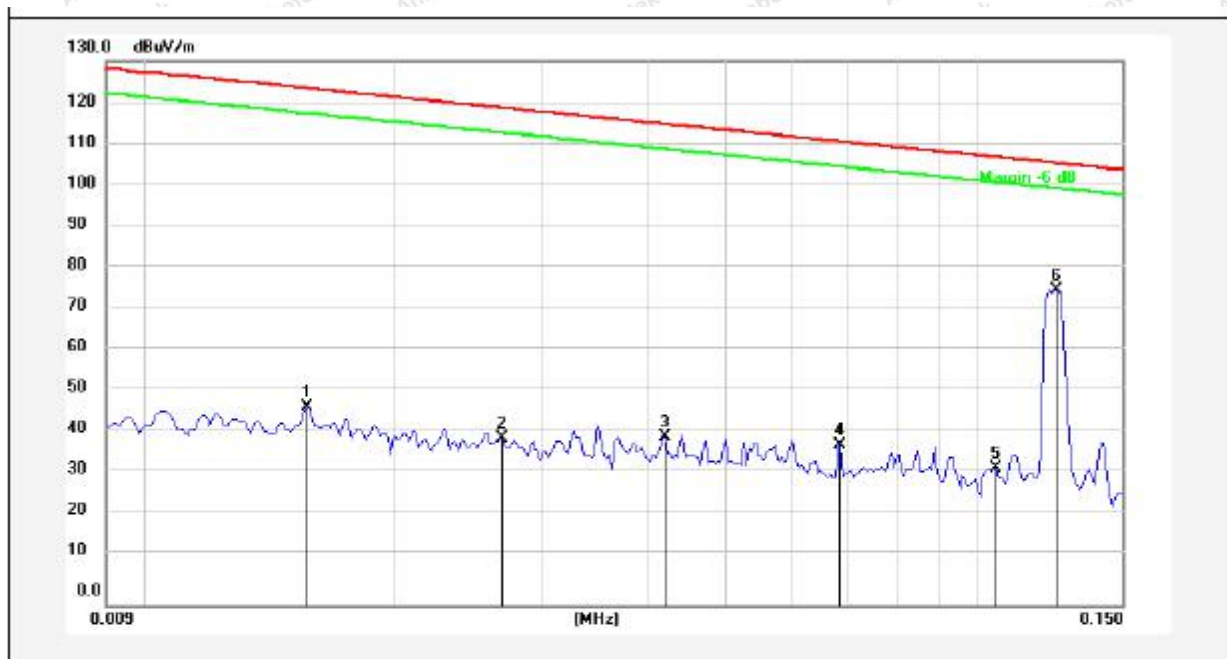


No.	Freq. (MHz)	Reading (dBuV)	Factor ( )	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0156	26.96	20.30	47.26	123.56	-76.30	peak			
2	0.0269	19.59	20.38	39.97	118.85	-78.88	peak			
3	0.0422	19.84	20.43	40.27	114.97	-74.70	peak			
4	0.0686	17.76	20.37	38.13	110.77	-72.64	peak			
5	0.1048	12.24	20.29	32.53	107.11	-74.58	peak			
6	0.1241	55.05	20.34	75.39	105.66	-30.27	peak			

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

**Test Results (0.15~30MHz)**


Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Temp.(°C)/Hum.(%RH): 22.4°C/50%RH  
 Distance: 3m

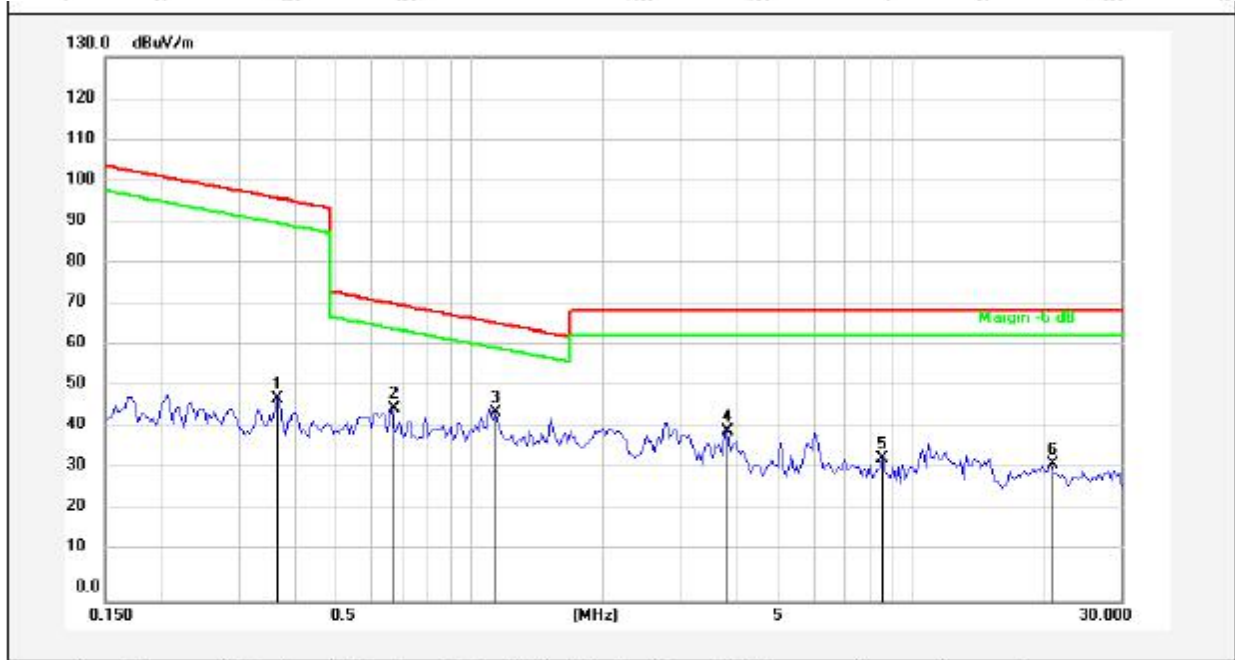

No.	Freq. (MHz)	Reading (dBuV)	Factor ( )	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.3691	28.02	20.28	48.30	96.25	-47.95	peak			
2	0.6701	25.76	20.26	46.02	71.09	-25.07	peak			
3	1.1533	24.69	20.26	44.95	66.39	-21.44	peak			
4	3.8500	20.19	20.36	40.55	69.50	-28.95	peak			
5	8.6372	13.46	20.51	33.97	69.50	-35.53	peak			
6	20.7038	11.93	20.59	32.52	69.50	-36.98	peak			

**Test Results (30~1000MHz)**

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 22.4°C/50%RH  
 Distance: 3m

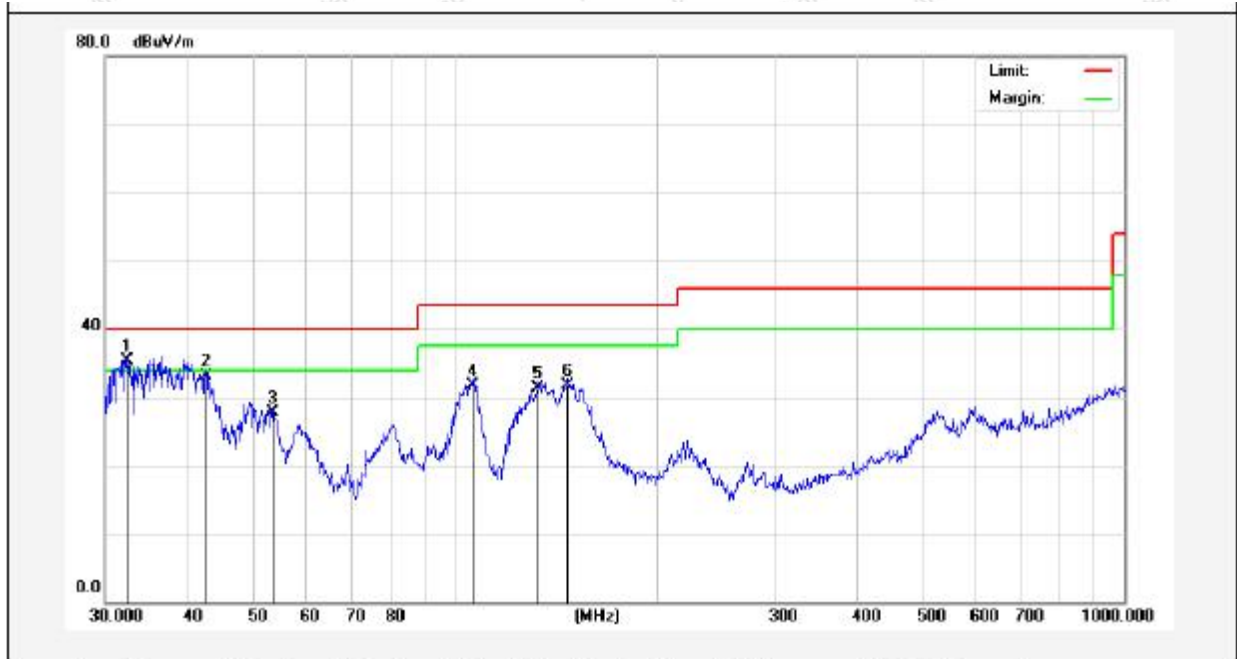

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.4059	52.04	-16.76	35.28	40.00	-4.72	QP	100	0	
2	42.4508	47.00	-13.84	33.16	40.00	-6.84	QP	100	360	
3	53.5052	43.71	-16.02	27.69	40.00	-12.31	QP	100	0	
4	106.0126	47.26	-15.62	31.64	43.50	-11.86	QP	100	360	
5	133.1511	50.86	-19.61	31.25	43.50	-12.25	QP	100	0	
6	147.4036	51.71	-19.95	31.76	43.50	-11.74	QP	100	360	

### Test Results (30~1000MHz)

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 22.4°C/50%RH  
 Distance: 3m



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	105.2718	53.09	-20.36	32.73	43.50	-10.77	QP	100	0	
2	128.5630	48.63	-20.65	27.98	43.50	-15.52	QP	100	360	
3	139.8508	46.78	-20.94	25.84	43.50	-17.66	QP	100	0	
4	896.9965	31.67	-1.78	29.89	46.00	-16.11	QP	100	360	
5	925.7563	31.23	-1.26	29.97	46.00	-16.03	QP	100	0	
6	958.7943	31.10	-0.64	30.46	46.00	-15.54	QP	100	360	


## 5. Antenna Requirement

### 5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

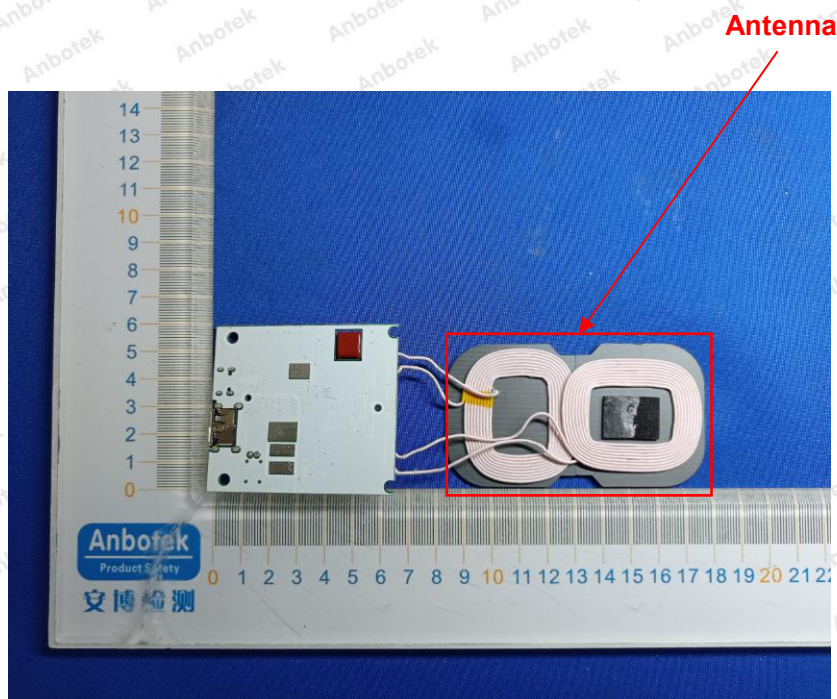


## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement





Photo of Radiation Emission Test






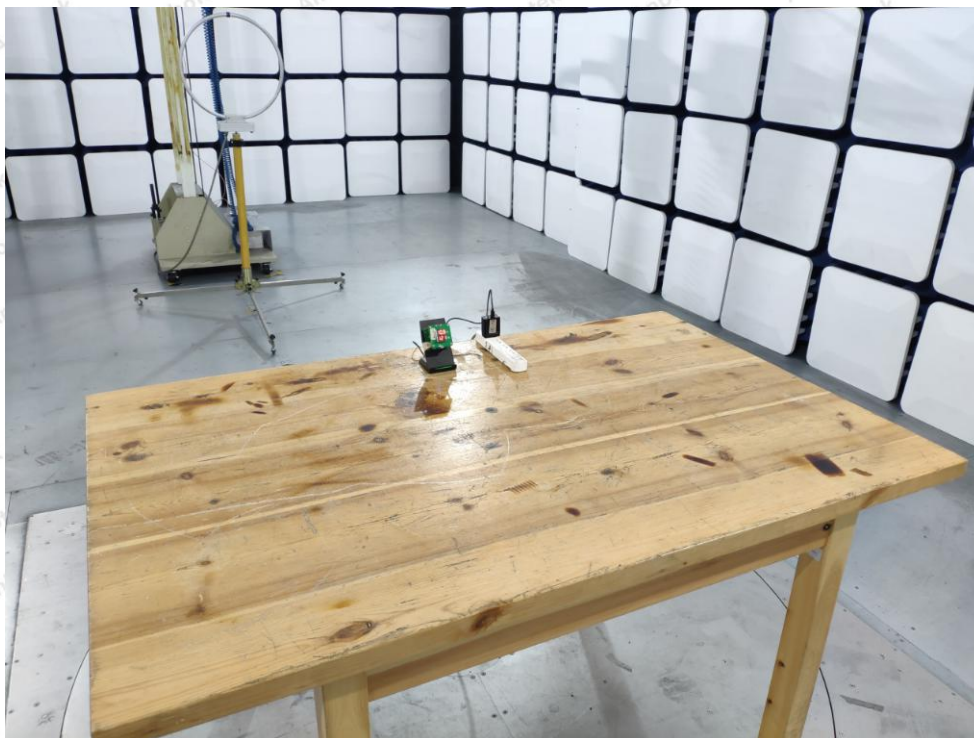






## APPENDIX II -- EXTERNAL PHOTOGRAPH

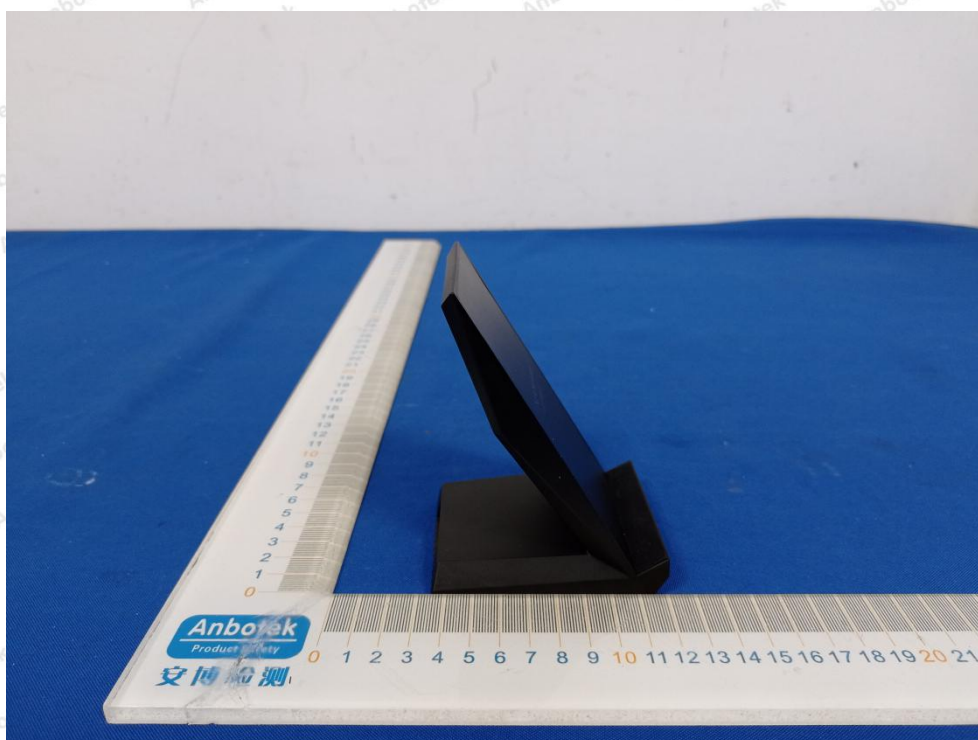
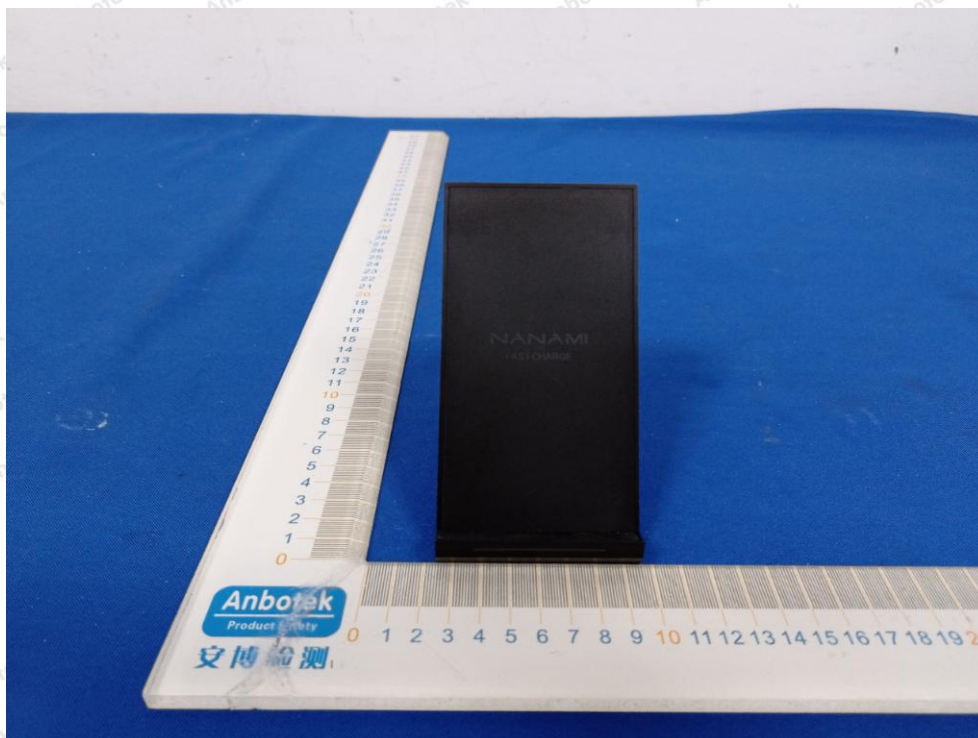


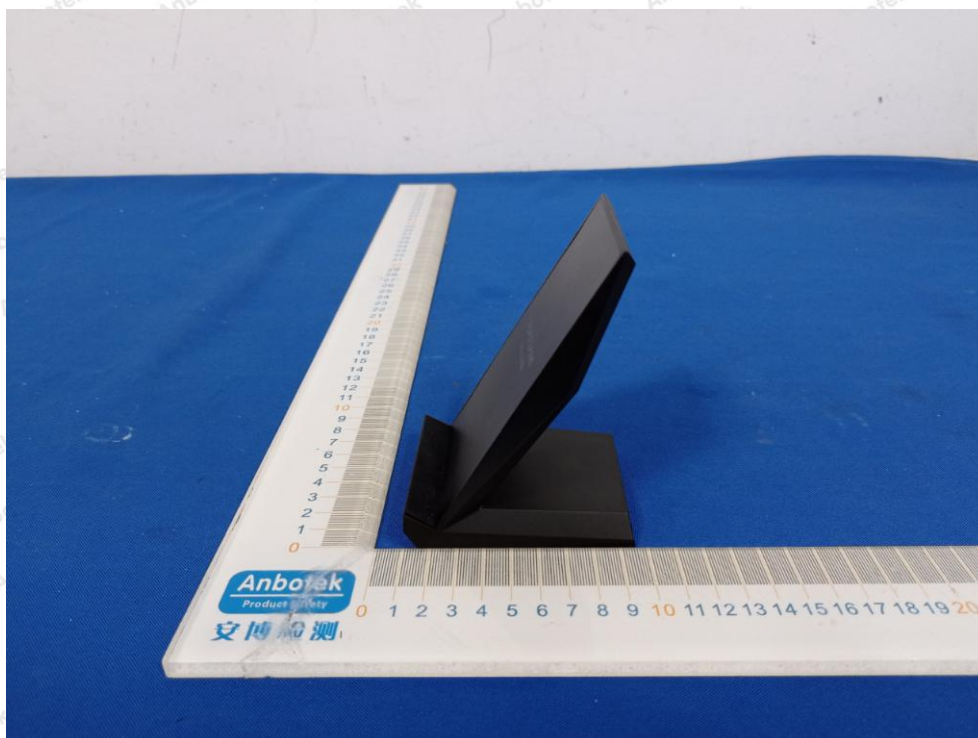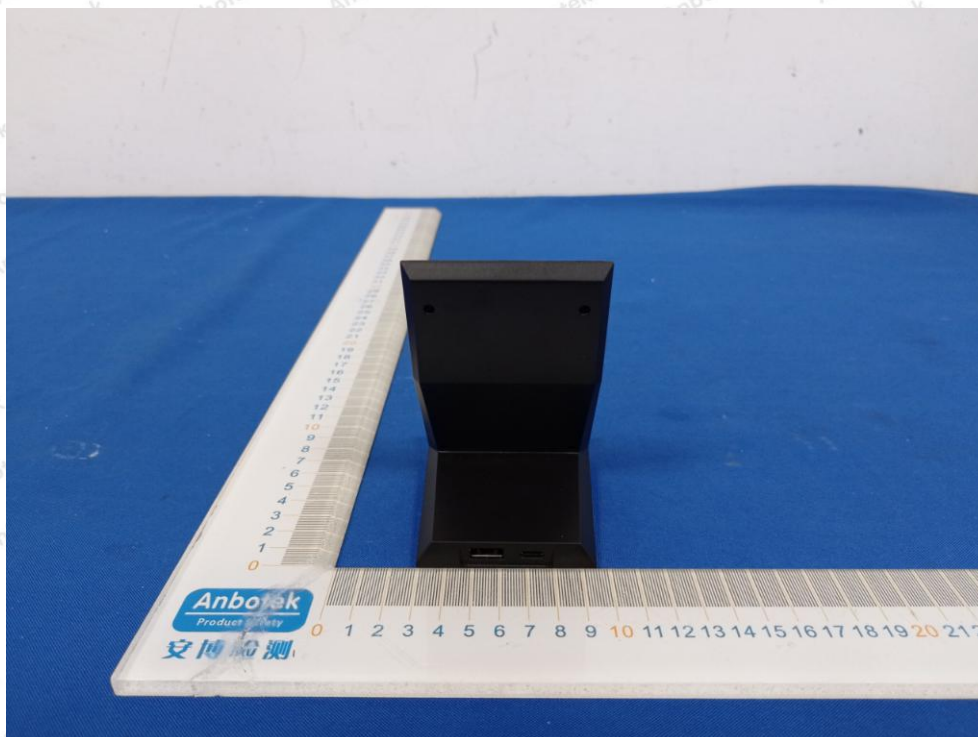


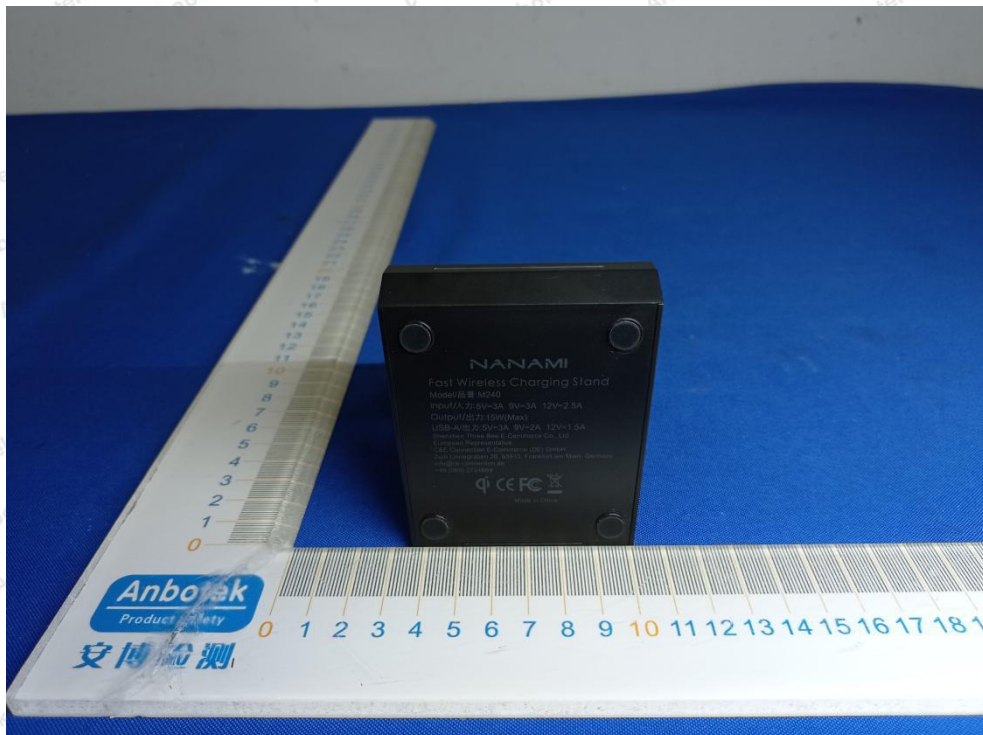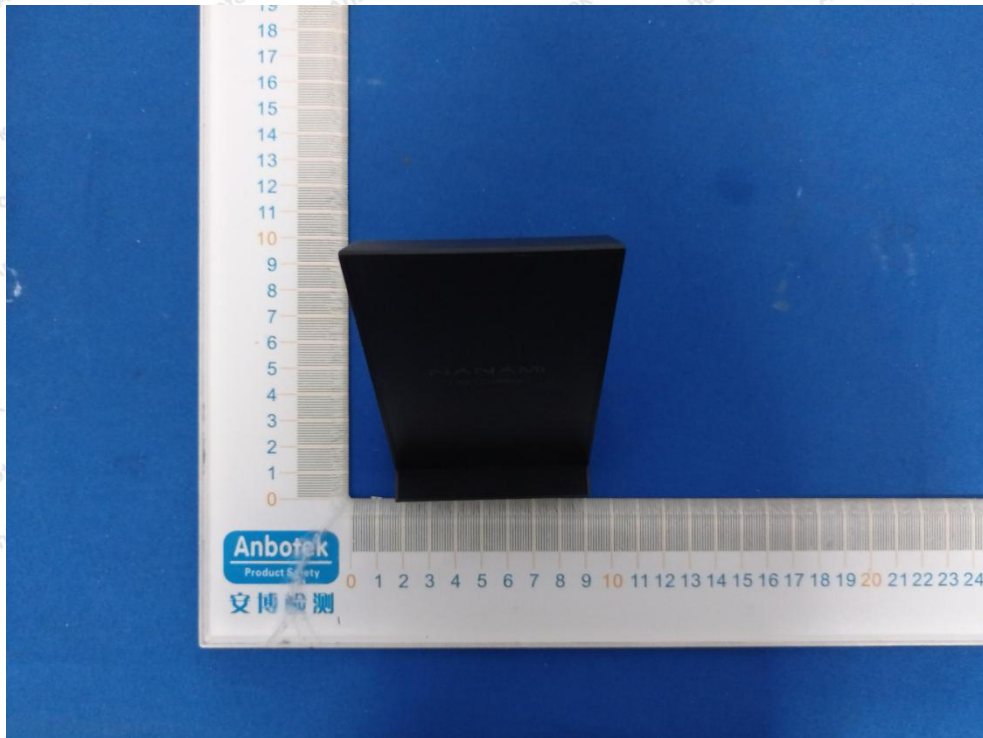

## APPENDIX III -- INTERNAL PHOTOGRAPH

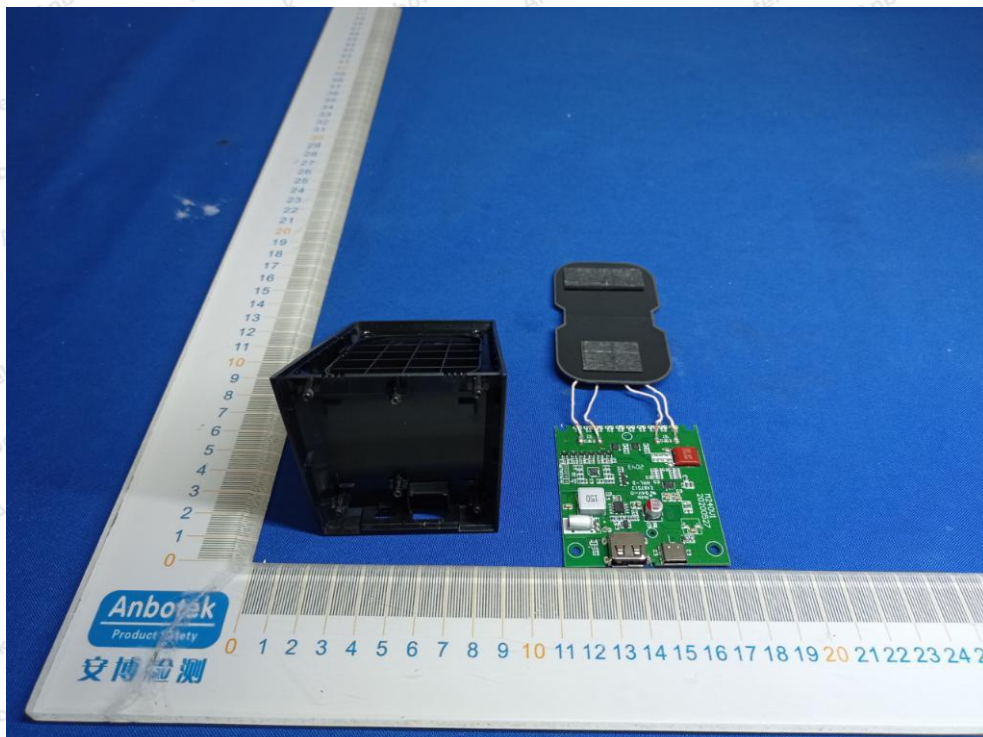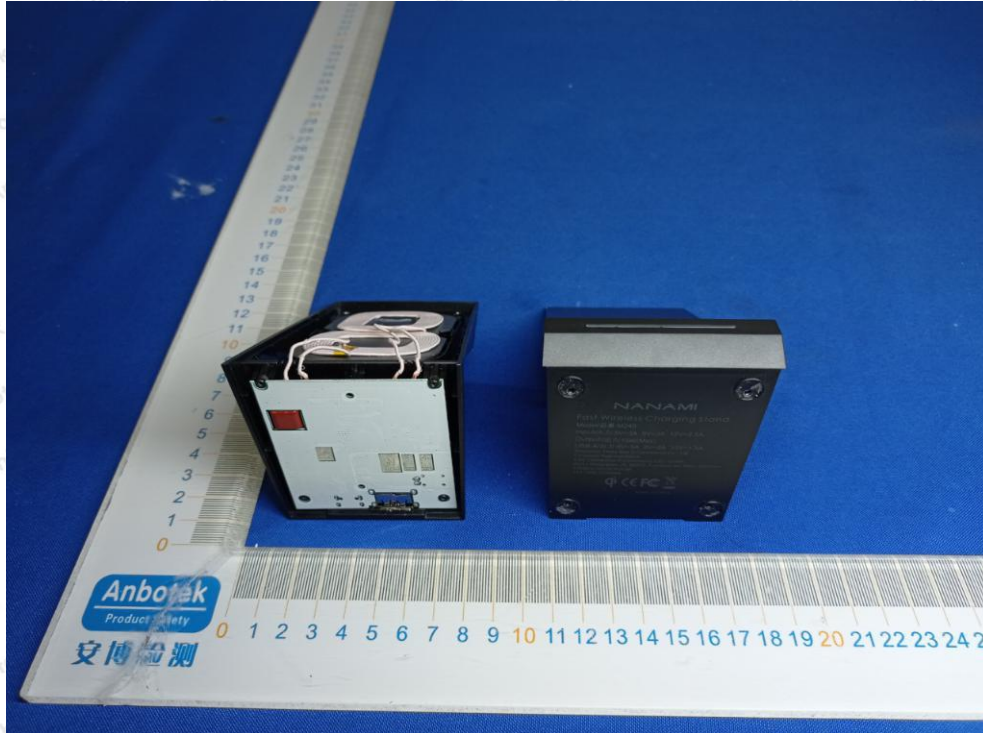

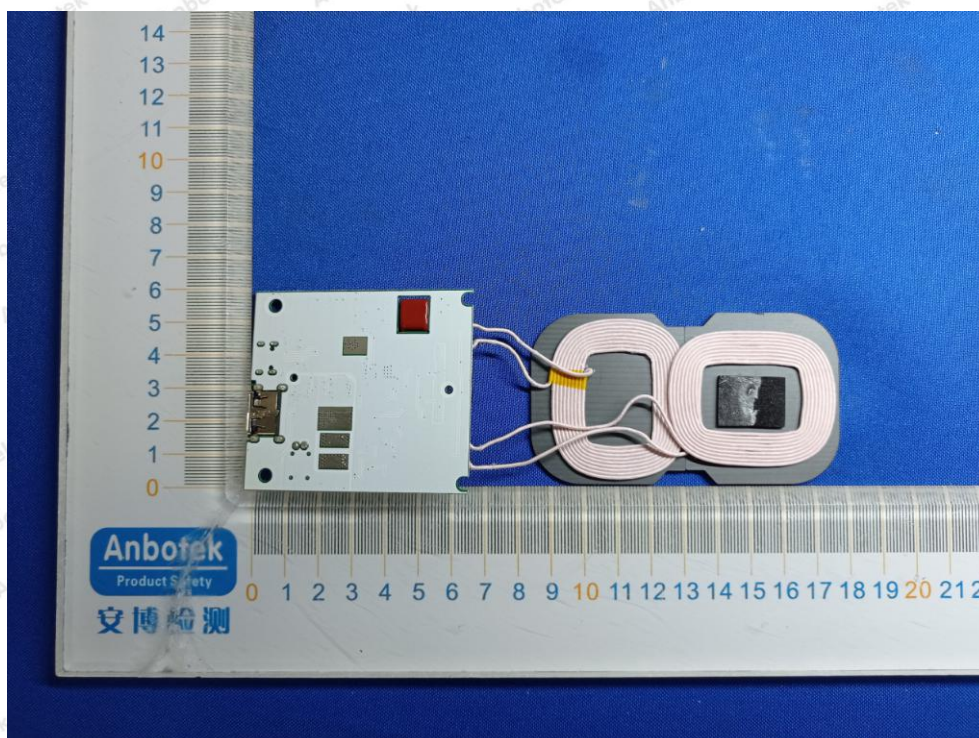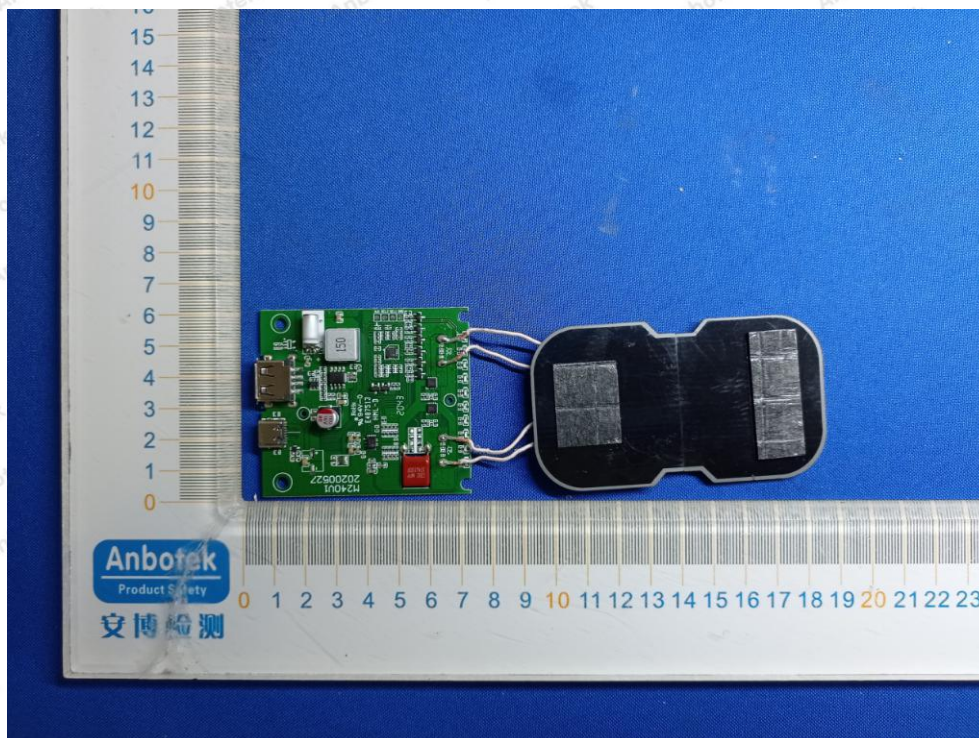

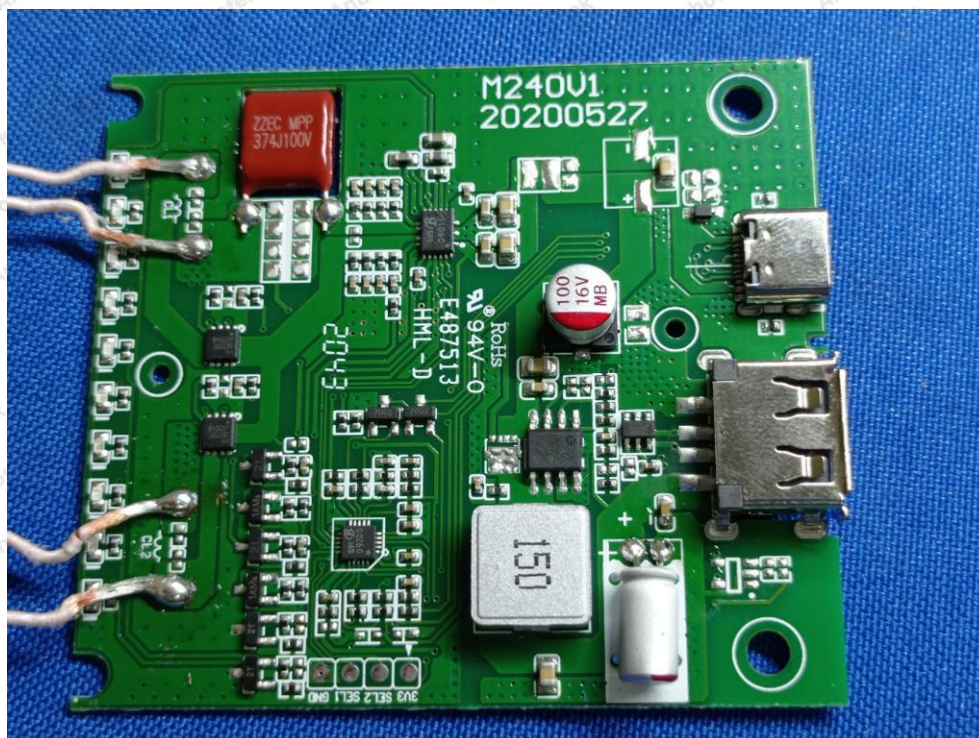

----- End of Report -----

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

**Code:AB-RF-05-a**

Hotline  
400-003-0500  
www.anbotek.com