



Page 153 of 177

Test Laboratory: AGC Lab Date: Sep. 19, 2024

LTE Band 66 Mid-Touch-Right (1 RB#0) DUT: Mobile Phone; Type: C1+ 4G

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.28; Frequency:1755 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.37$ mho/m; $\epsilon r = 39.37$; $\rho = 1000$ kg/m³;

Phantom section: Left Section

Ambient temperature ($^{\circ}$): 22.5, Liquid temperature ($^{\circ}$): 22.3

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 66 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

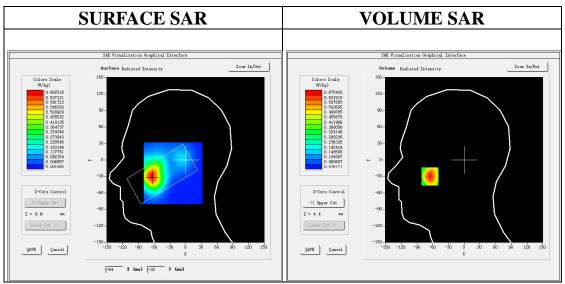


Maximum location: X=-65.00, Y=-30.00 SAR Peak: 0.99 W/kg


SAR 10g (W/Kg)	0.386024
SAR 1g (W/Kg)	0.650035


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





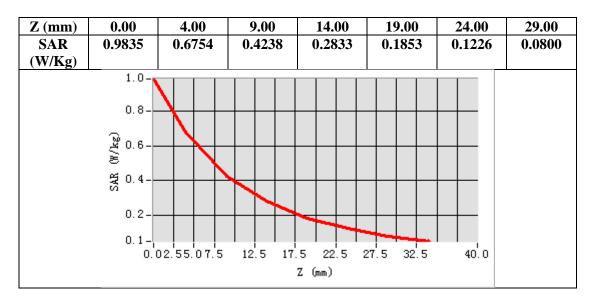

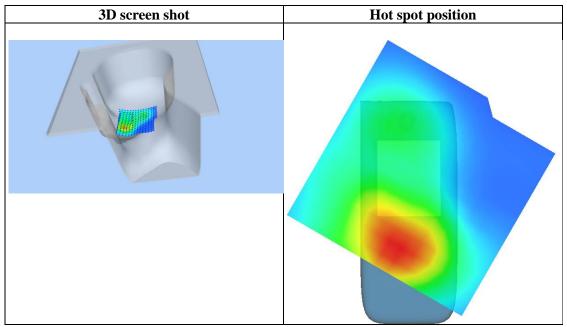



Date: Sep. 19, 2024

Page 155 of 177

Test Laboratory: AGC Lab

LTE Band 66 High-Body-Back (1 RB#0) DUT: Mobile Phone; Type: C1+ 4G

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.28; Frequency:1770 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.38$ mho/m; $\epsilon r = 39.12$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.5, Liquid temperature ($^{\circ}$): 22.3

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 66 High-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 High-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 66
Channels	High
Signal	OFDM (Crest factor: 1.0)

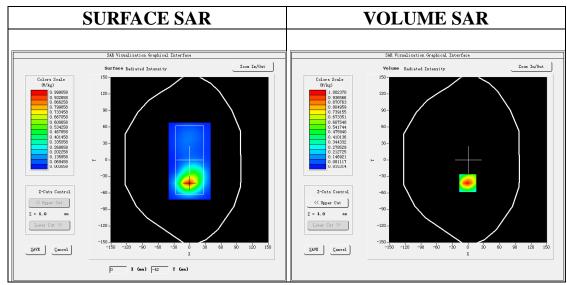



Maximum location: X=-1.00, Y=-42.00 SAR Peak: 1.62 W/kg

SAR 10g (W/Kg)	0.477728
SAR 1g (W/Kg)	0.944868





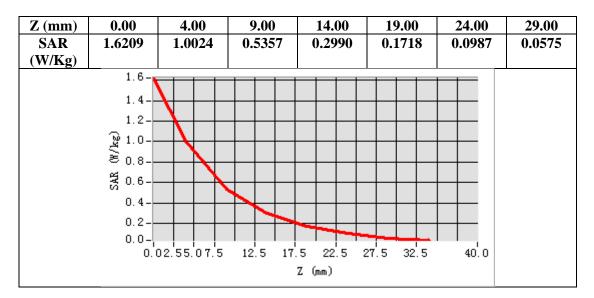

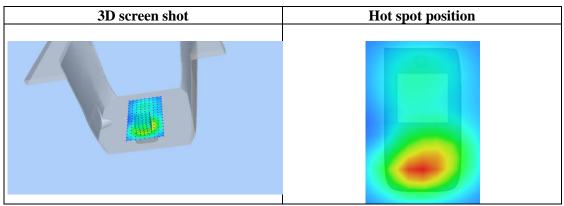



Page 157 of 177

Repeated SAR

Test Laboratory: AGC Lab Date: Sep. 18, 2024

PCS 1900 Mid-Body-Back (MS)<SIM 1> DUT: Mobile Phone; Type: C1+ 4G

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=2.08; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.40$ mho/m; $\epsilon = 39.78$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.0

SATIMO Configuration:

• Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/PCS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

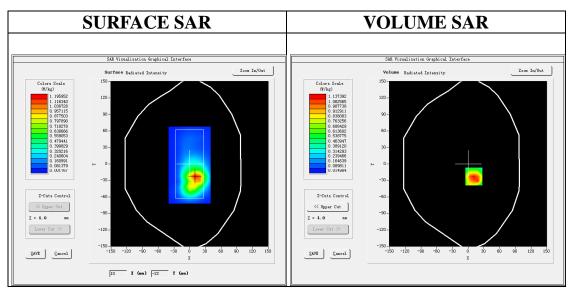


Maximum location: X=11.00, Y=-23.00 SAR Peak: 1.84 W/kg


SAR 10g (W/Kg)	0.593967
SAR 1g (W/Kg)	1.079599


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





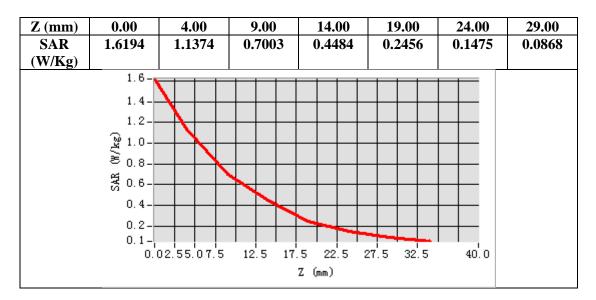

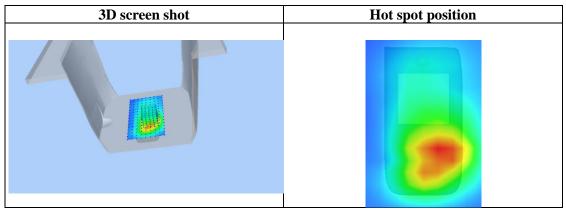



Page 159 of 177

Test Laboratory: AGC Lab Date: Sep. 18, 2024

WCDMA Band II Mid-Body-Towards Grounds (RMC 12.2kbps)

DUT: Mobile Phone; Type: C1+ 4G

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=2.08; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.40$ mho/m; $\epsilon = 39.78$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.0

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ WCDMA band II Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA band II Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

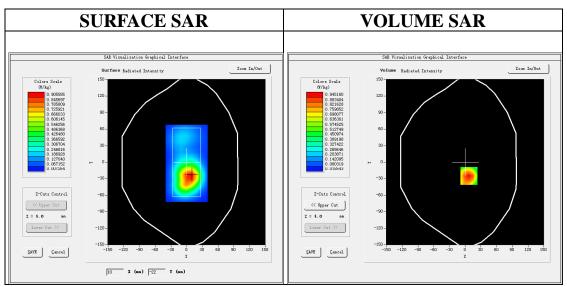



Maximum location: X=7.00, Y=-25.00 SAR Peak: 1.41 W/kg

SAR 10g (W/Kg)	0.517231
SAR 1g (W/Kg)	0.900213





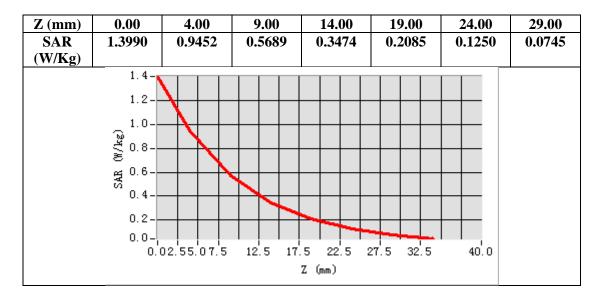

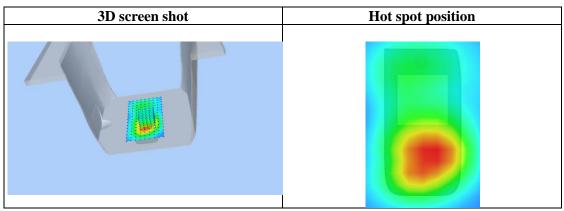



Page 161 of 177

Test Laboratory: AGC Lab Date: Sep. 18, 2024

LTE Band 2 High-Body-Back (1 RB#0) DUT: Mobile Phone; Type: C1+ 4G

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.08; Frequency:1900MHz; Medium parameters used: f = 1900 MHz; $\sigma = 1.41 \text{ mho/m}$; $\epsilon = 39.61$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 21.4, Liquid temperature ($^{\circ}$): 21.0

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 High-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 2 High-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 2
Channels	High
Signal	OFDM (Crest factor: 1.0)

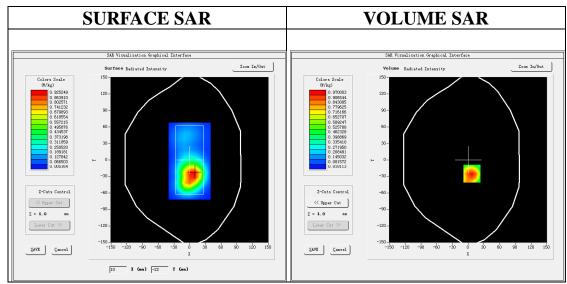


Maximum location: X=7.00, Y=-25.00 SAR Peak: 1.46 W/kg


SAR 10g (W/Kg)	0.528569
SAR 1g (W/Kg)	0.923973


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





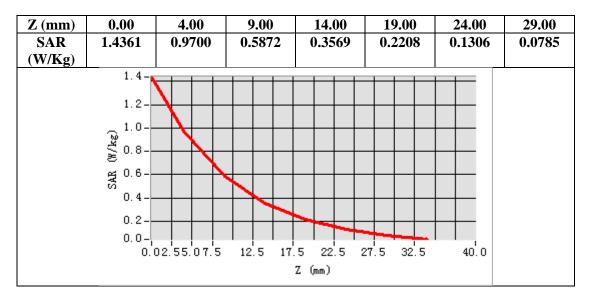

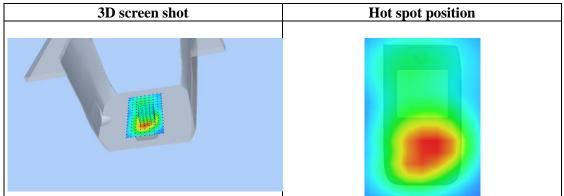



Date: Sep. 19, 2024

Page 163 of 177

Test Laboratory: AGC Lab

LTE Band 4 Mid-Body-Back (1 RB#0) DUT: Mobile Phone; Type: C1+ 4G

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.28; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.35$ mho/m; $\epsilon = 41.25$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.5, Liquid temperature ($^{\circ}$): 22.3

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

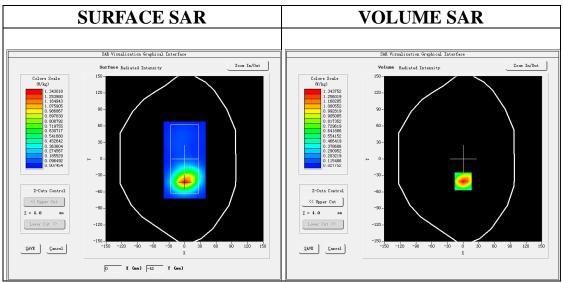


Maximum location: X=0.00, Y=-41.00 SAR Peak: 2.10 W/kg


SAR 10g (W/Kg)	0.675435
SAR 1g (W/Kg)	1.268113


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





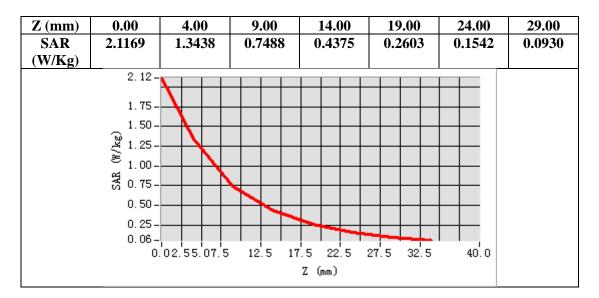

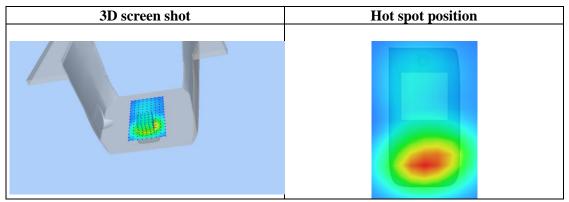



Page 165 of 177

Test Laboratory: AGC Lab Date: Sep. 14, 2024

LTE Band 26-A Low-Body-Back (1 RB#0) DUT: Mobile Phone; Type: C1+ 4G

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=1.89 Frequency:831.5MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.87 \text{ mho/m}$; $\epsilon = 41.74$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.0, Liquid temperature ($^{\circ}$): 21.8

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 26-A Low-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26-A Low-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 26-A
Channels	Low
Signal	OFDM (Crest factor: 1.0)

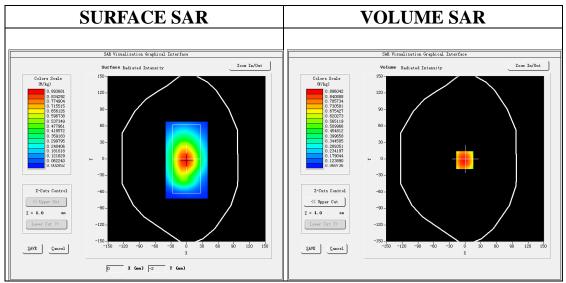



Maximum location: X=-1.00, Y=-2.00 SAR Peak: 1.14 W/kg

SAR 10g (W/Kg)	0.605465
SAR 1g (W/Kg)	0.865574





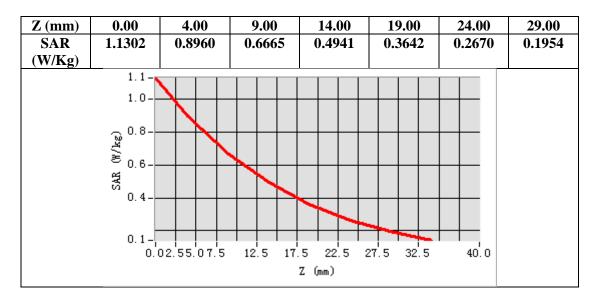

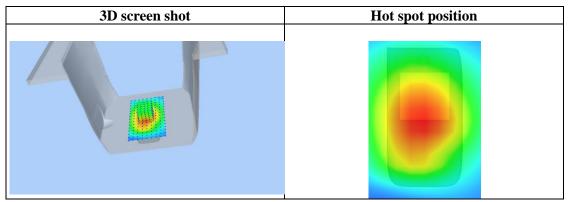



Page 167 of 177

Test Laboratory: AGC Lab Date: Sep. 14, 2024

LTE Band 26-B Mid-Body-Back (1 RB#0) DUT: Mobile Phone; Type: C1+ 4G

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=1.89 Frequency:821.5 MHz; Medium parameters used: f = 835 MHz; $\sigma = 0.82$ mho/m; $\epsilon r = 42.01$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.0, Liquid temperature ($^{\circ}$): 21.8

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 26-B Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 26-B Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 26-B
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

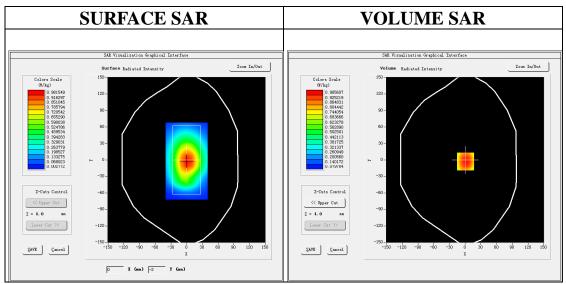



Maximum location: X=1.00, Y=-3.00 SAR Peak: 1.25 W/kg

SAR 10g (W/Kg)	0.664796
SAR 1g (W/Kg)	0.948603





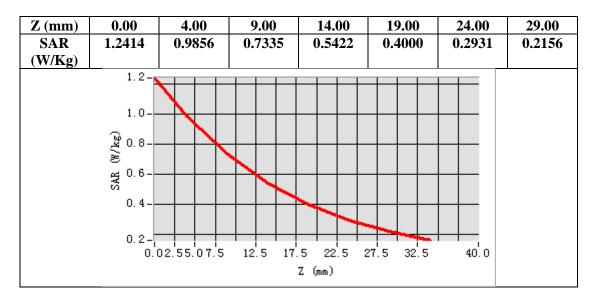

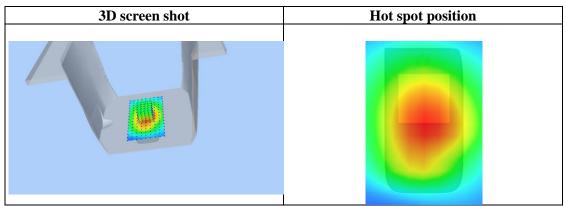



Date: Sep. 19, 2024

Page 169 of 177

Test Laboratory: AGC Lab

LTE Band 66 High-Body-Back (1 RB#0) DUT: Mobile Phone; Type: C1+ 4G

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.28; Frequency:1770 MHz; Medium parameters used: f = 1750 MHz; $\sigma = 1.38$ mho/m; $\epsilon r = 39.12$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$): 22.5, Liquid temperature ($^{\circ}$): 22.3

SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4_02_35


Configuration/ LTE Band 66 High-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 High-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 66
Channels	High
Signal	OFDM (Crest factor: 1.0)

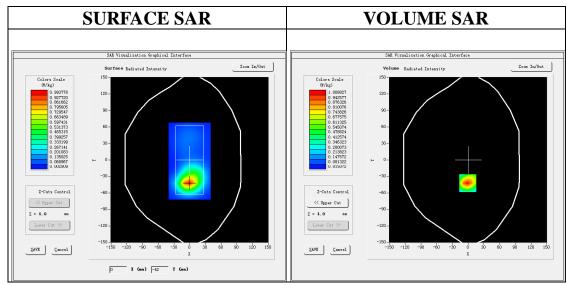



Maximum location: X=-1.00, Y=-42.00 SAR Peak: 1.64 W/kg


SAR 10g (W/Kg)	0.477303
SAR 1g (W/Kg)	0.948422





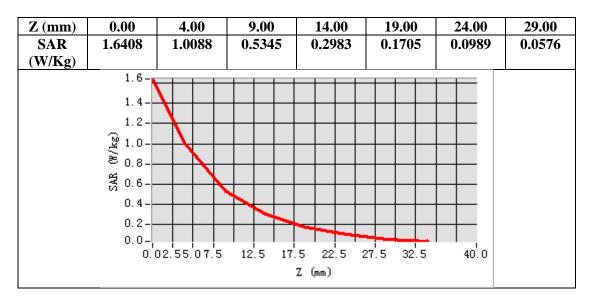

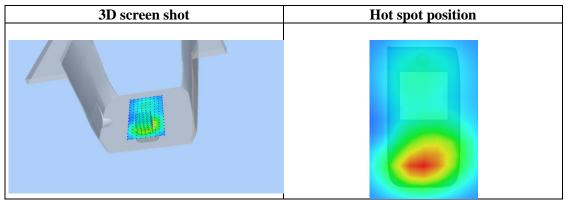







APPENDIX C. TEST SETUP PHOTOGRAPHS

LEFT-CHEEK TOUCH

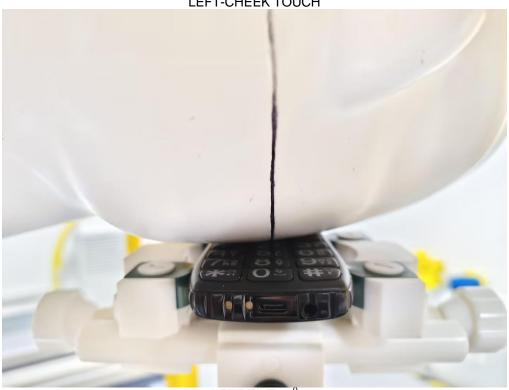












RIGHT- CHEEK TOUCH

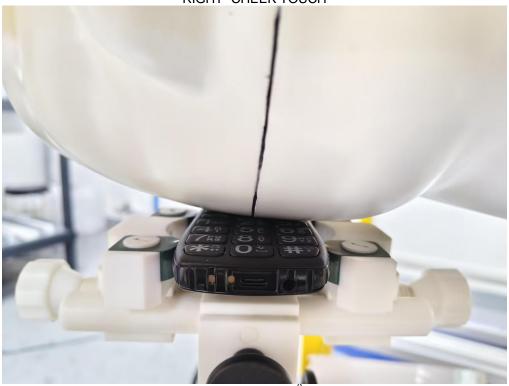














Body Front 10mm







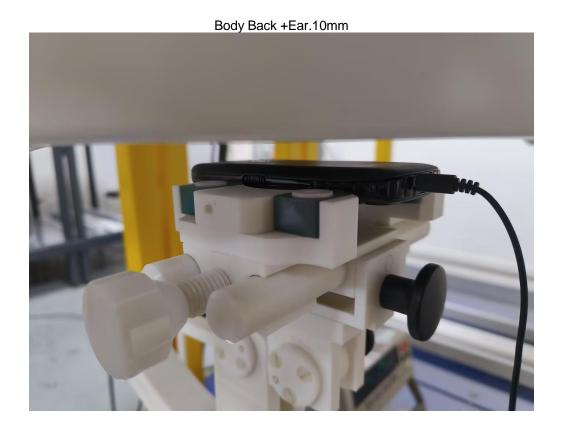








DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE 1528-2013

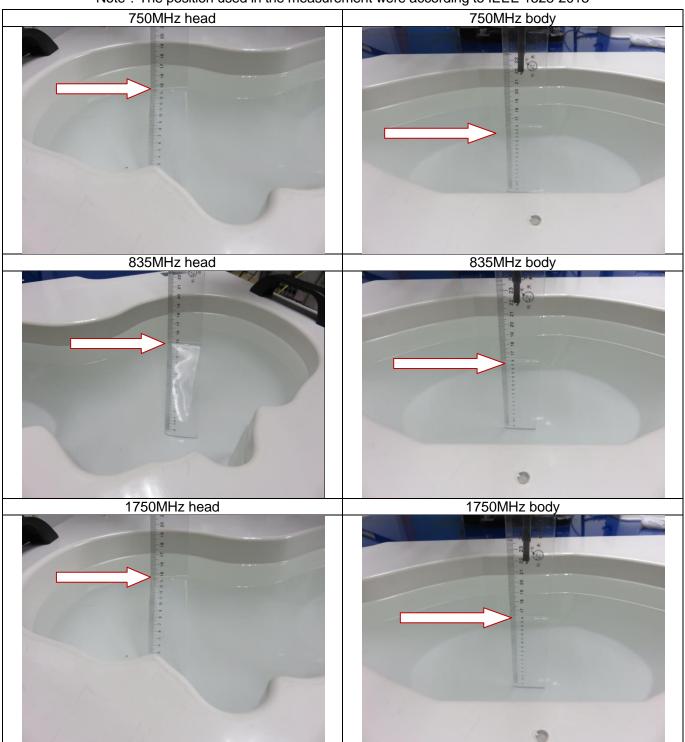





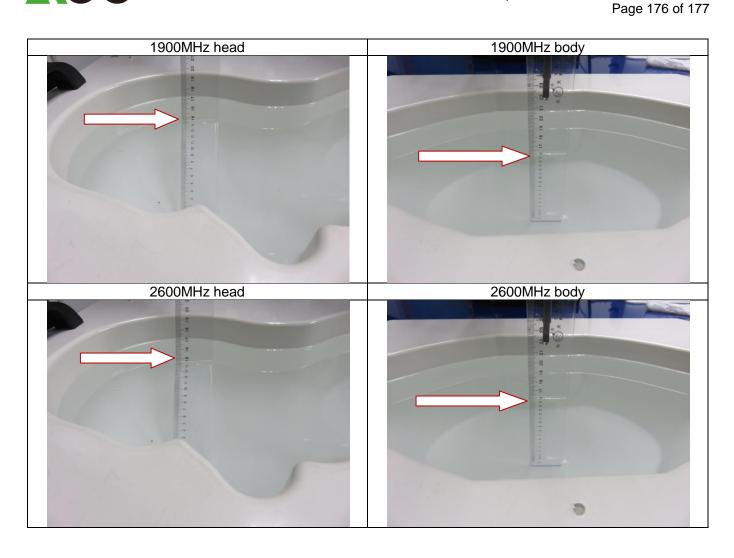



Page 177 of 177

APPENDIX D. CALIBRATION DATA

Refer to Attached files.

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.