


| DIMENSIONAL TOLERANCE | | | | | | | | C H A N G E | SIGN | DATE | ECO SUMMARY | SH. Yoon | - New |
|----------------------------|--------|---------|----------|-----------|------------|-------------|-----------|----------------------------|------|------|-------------|----------|-------|
| DIM GRADE | 4 z | 5 12 | 13 36 | 37 110 | 111 330 | 331 1000 | 1000 z | | | | | | |
| 1 | 0.10 | 0.10 | 0.20 | 0.20 | 0.30 | 0.50 | 1.0 | | | | | | |
| 2 | 0.15 | 0.20 | 0.30 | 0.45 | 0.70 | 1.0 | 1.5 | | | | | | |
| 3 | 0.20 | 0.30 | 0.45 | 0.70 | 1.0 | 1.5 | 2.0 | | | | | | |
| 4 | 0.30 | 0.45 | 0.70 | 1.0 | 1.5 | 2.0 | 3.0 | | | | | | |
| 5 | 0.45 | 0.70 | 1.0 | 1.5 | 2.0 | 3.0 | 4.0 | | | | | | |
| ANGULAR | | | | | | | 0 | | | | | | |
| UNLESS OTHERWISE SPECIFIED | | | | | | | | | | | | | |

Quantity by type

| | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| WBa0 | WRbd | WRac | HRb4 | HRa3 | HR2d | HR1c | WE0c | WE0d | SB10 | SR24 | SR13 | SE03 | SE04 |
| M | M | M | M | M | M | M | S | S | M | M | M | S | S |

A

A

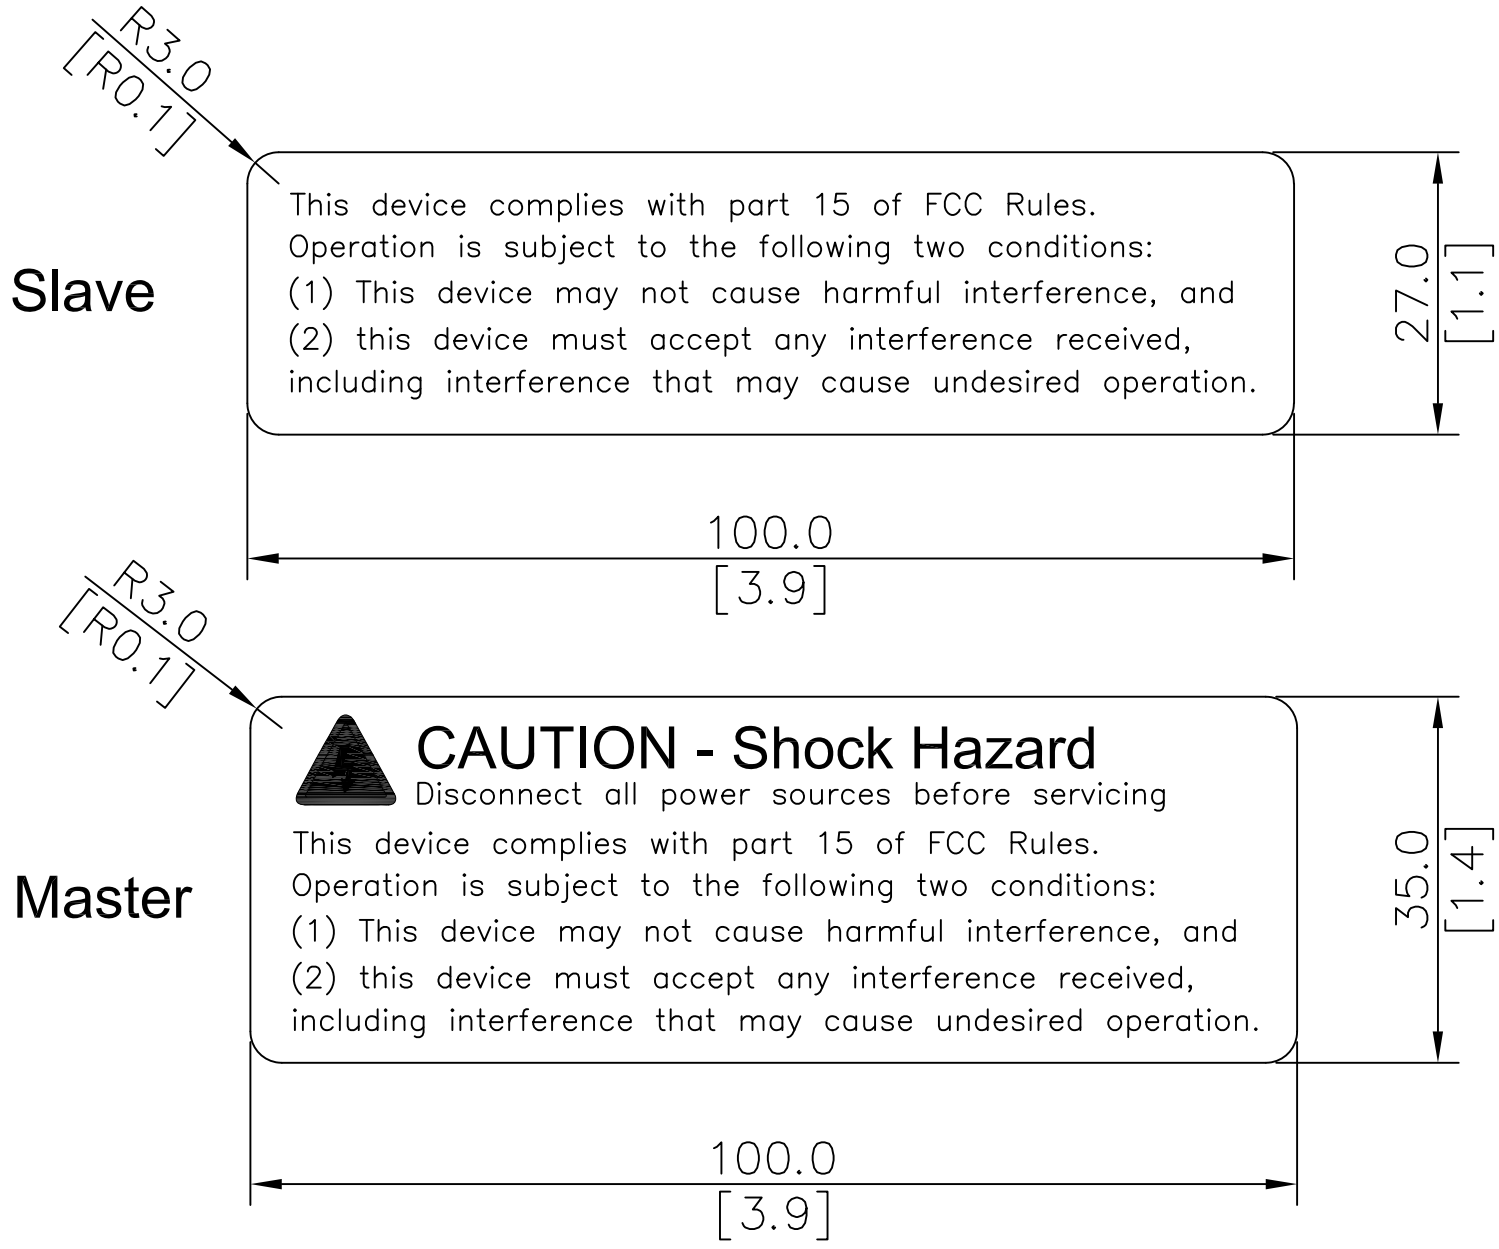

B

B

- Note.
1. Backside adhesive tape treatment
 2. Flame Retardant Grade : No less than UL94 -V02.

| E | D | C | B | A | NO. | PART NO. | DESCRIPTION | MATERIAL | COLOR/FINISH | REMARK |
|----------|---|---|---|---|-------|------------|--------------------------------------|--------------------------|--------------|----------|
| QUANTITY | | | | | | | | | | |
| | | | | | SCALE | UNIT | DRAWN BY: 02/28/2020 SANGHEE.YOON | TITLE FCC Rules Label | | |
| | | | | | 1/1 | mm inch | CHECKED BY: 02/28/2020 KIHYUN.KIM | MATERIAL PC 0.2mm | | QUANTITY |
| | | | | | | | APPROVED BY: 02/28/2020 HUNHO.CHO | Rev. | SIZE | DWG No. |
| | | | | | | | | 0 | A4 | REF. |
| | | | | | | | | HM-TM-000025 | CONTACT No. | FQ18152 |
| | | | | | | | | | SHEET | 1/1 |