


DIMENSIONAL TOLERANCE								C H A N G E	SIGN	DATE	ECO SUMMARY	SH.Yoon	2019. 10. 18	- New	
DIM GRADE	4 z	5 12	13 36	37 110	111 330	331 1000	1000 z								
1	0.10	0.10	0.20	0.20	0.30	0.50	1.0								
2	0.15	0.20	0.30	0.45	0.70	1.0	1.5								
3	0.20	0.30	0.45	0.70	1.0	1.5	2.0								
4	0.30	0.45	0.70	1.0	1.5	2.0	3.0								
5	0.45	0.70	1.0	1.5	2.0	3.0	4.0								
ANGULAR								0							
UNLESS OTHERWISE SPECIFIED															

Quantity by type

WBa0	WRbd	WRac	HRb4	HRa3	HR2d	HR1c	WE0c	WE0d	SB10	SR24	SR13	SE03	SE04
1	1	1	1	1	1	1	1	1	1	1	1	1	1

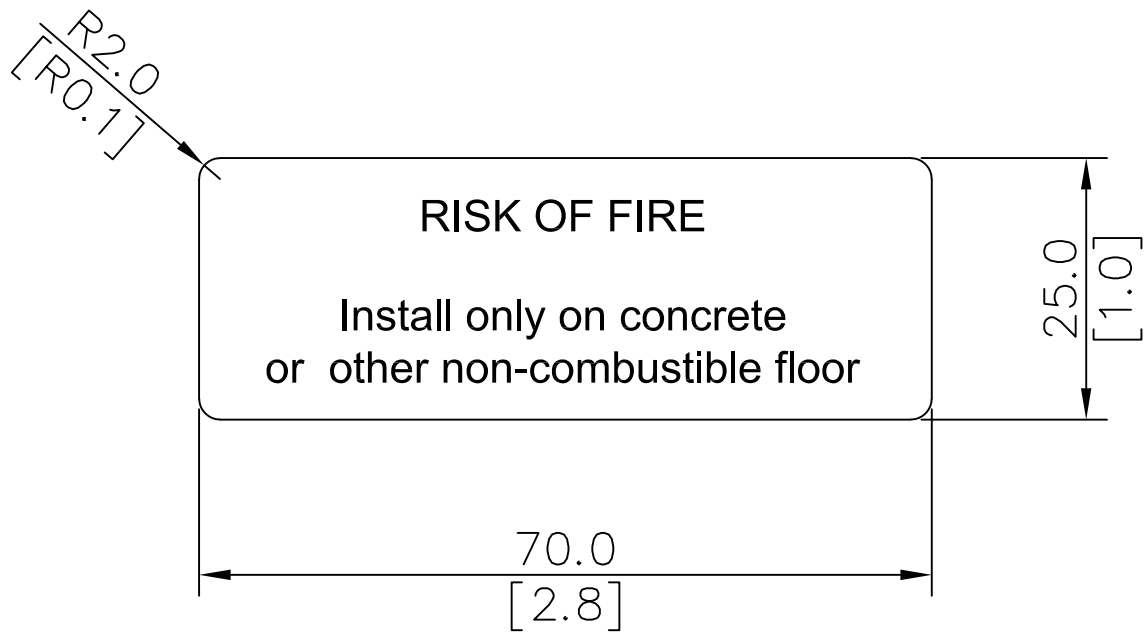

- Note.
1. Backside adhesive tape treatment
 2. Flame Retardant Grade : No less than UL94 -V02.

E D C B A					NO.	PART NO.	DESCRIPTION	MATERIAL	COLOR/FINISH	REMARK
QUANTITY										
					SCALE	UNIT	DRAWN BY: 02/28/2020 SANGHEE.YOON	TITLE RISK OF FIRE Label		
					1/1	mm inch	CHECKED BY: 02/28/2020 KIHYUN.KIM	MATERIAL	PC 0.2mm	QUANTITY
					APPROVED BY: 02/28/2020 HUNHO.CHO	Rev.	SIZE	DWG No.	CONTACT No.	FQ18152
						0	A4	REF.	HM-TM-000026	SHEET