




















Exemplary nominal labels for X series of balances

 www.radwag.com	RADWAG Balances & Scales Made in Poland (EU)	
Model: AS 82/200.X2 PLUS		
S/N: 123456		
Max 82/220g Min 1mg d = 0,01/0,1mg e = 1mg T = - 220g		
Certificate number: xx-xxx		
Temperature range: +10°C to +40°C (50°F to 104°F)		
FCC ID: 2AXRT-ASPSX (Contains FCC ID:2AHMR-ESP12F)		
Regional distribution center: RADWAG USA LLC Tel +1 305 651 3522 / Fax +1 305 651 3523 office@radwagusa.com, www.radwagusa.com	  xxxx	


 www.radwag.com	RADWAG Balances & Scales Made in Poland (EU)	
Model: PS 750.X2		
S/N: 123456		
Max 750g Min 20mg d = 0,001g e = 0,01g T = - 750g		
Certificate number: xx-xxx		
Temperature range: +10°C to +40°C (50°F to 104°F)		
FCC ID: 2AXRT-ASPSX (Contains FCC ID:2AHMR-ESP12F)		
Regional distribution center: RADWAG USA LLC Tel +1 305 651 3522 / Fax +1 305 651 3523 office@radwagusa.com, www.radwagusa.com	  xxxx	

 www.radwag.com	RADWAG Balances & Scales Made in Poland (EU)	
Model: PS 8100.X2.M		
S/N: 123456		
Max 8100g Min 500mg d = 0,01g e = 0,1g T = - 8100g		
Certificate number: xx-xxx		
Temperature range: +10°C to +40°C (50°F to 104°F)		
FCC ID: 2AXRT-ASPSX (Contains FCC ID:2AHMR-ESP12F)		
Regional distribution center: RADWAG USA LLC Tel +1 305 651 3522 / Fax +1 305 651 3523 office@radwagusa.com, www.radwagusa.com	  xxxx	


Placemant of nominal labels on devices

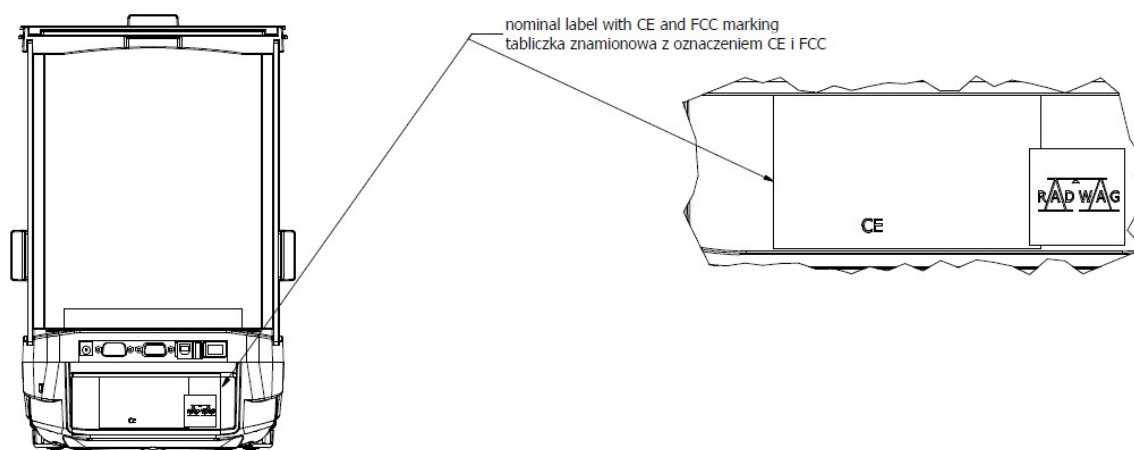

AS X label placement

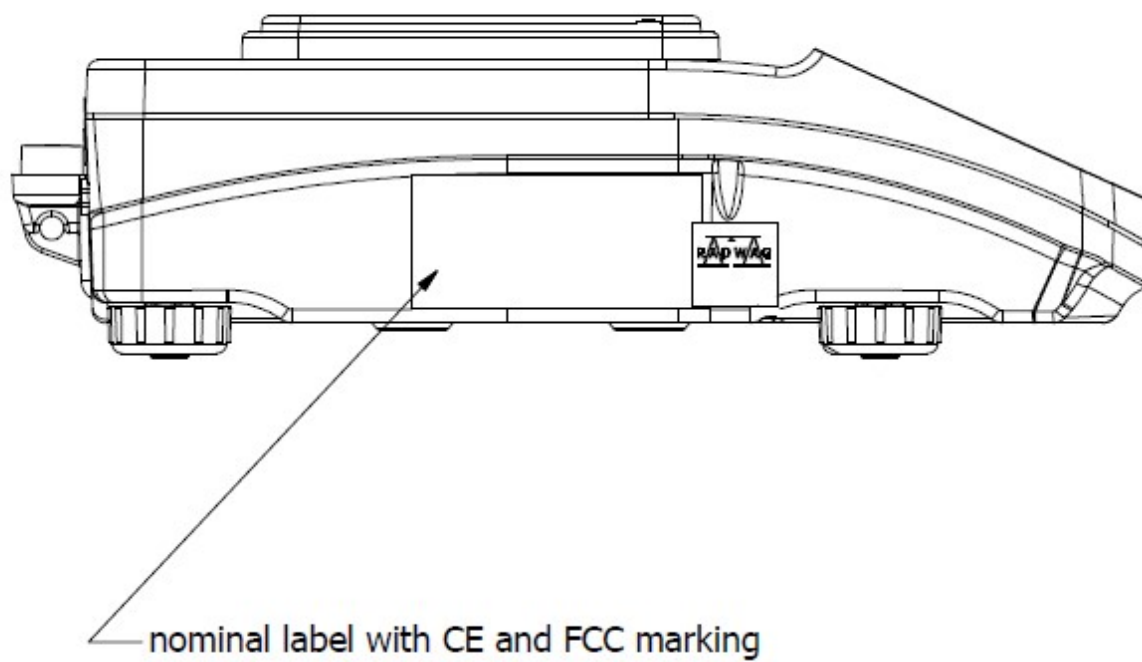

PS X label placement

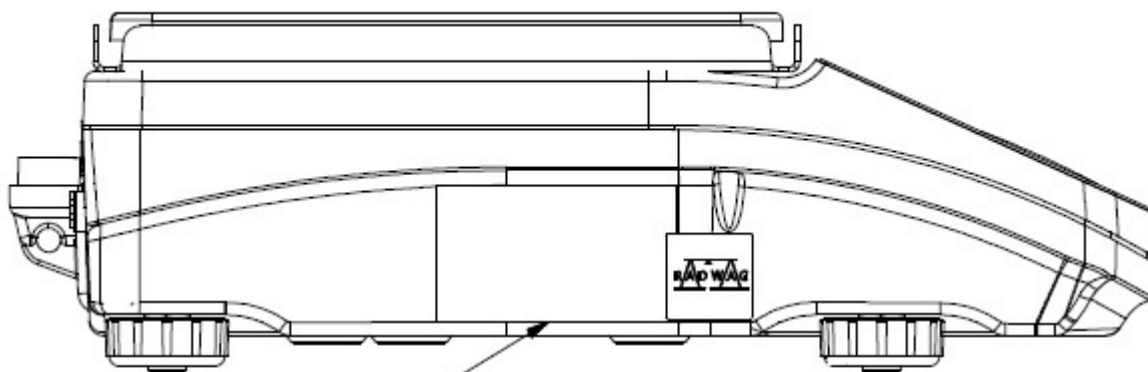

nominal label with CE and FCC marking

PS X.M label placement