

January 10, 2021

Nexxiot Inc
7290 Virginia Parkway Suite 3000
McKinney, TX 75071
USA

Dear Kenneth Mannka,

Enclosed is the EMC Wireless test report for compliance testing of the Nexxiot Inc, Globehopper Crossmodal 3.0 as tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 22 Subpart H for Cellular Devices and FCC Part 24 Subpart E for Broadband PCS Devices.

Thank you for using the services of Eurofins E&E North America. If you have any questions regarding these results or if MET can be of further service to you, please contact me.

Sincerely yours,
EUROFINS E&E NORTH AMERICA

A handwritten signature in black ink, appearing to read "Arsalan Hasan".

Arsalan Hasan
Wireless Laboratory

Reference: (\Nexxiot Inc\WIRS109627-FCC-22-24 Rev 0)



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E North America. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

Electromagnetic Compatibility Criteria Test Report

for the

**Nexxiot Inc
Globehopper Crossmodal 3.0**

**Tested under
FCC Certification Rules
Title 47 of the CFR,
Part 22 Subpart H for Cellular Devices
&
Part 24 Subpart E for Broadband PCS Devices**

Report: WIRS109627-FCC-22-24 Rev 0

January 10, 2021

Prepared For:

**Nexxiot Inc
7290 Virginia Parkway Suite 3000
McKinney, TX 75071
USA**


**Prepared By:
Eurofins E&E North America
3162 Belick St.
Santa Clara, CA 95054**

**Electromagnetic Compatibility Criteria
Test Report**

for the

**Nexxiot Inc
Globehopper Crossmodal 3.0**

**Tested Under
FCC Certification Rules
Title 47 of the CFR,
Part 22 Subpart H for Cellular Devices
&
Part 24 Subpart E for Broadband PCS Devices**



Felix Huang
Engineer, Wireless Laboratory



Arsalan Hasan
Manager, Wireless Laboratory

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 22 Subpart H and Part 24 Subpart E of the FCC Rules under normal use and maintenance.



Eleazar Zuniga, PhD.
Director, Wireless Technologies

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	January 10, 2021	Initial Issue.

Table of Contents

I.	Executive Summary	7
	1.1 Purpose of Test.....	8
	1.2 Executive Summary	8
II.	Equipment Configuration	9
	2.1 Overview	10
	2.2 References.....	11
	2.3 Test Site	11
	2.4 Measurement Uncertainty	11
	2.5 Description of Test Sample.....	12
	2.6 Equipment Configuration.....	6
	2.7 Support Equipment	6
	2.8 Ports and Cabling Information	6
	2.9 Mode of Operation	6
	2.10 Method of Monitoring EUT Operation	7
	2.11 Modifications	7
	2.11.1 Modifications to EUT	7
	2.11.2 Modifications to Test Standard.....	7
	2.12 Disposition of EUT	7
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	14
	§ 2.1046 Radiated Output Power.....	15
	§ 2.1053 Radiated Spurious Emissions	22
IV.	Test Equipment	30

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB_μA	Decibels above one microamp
dB_μV	Decibels above one microvolt
dB_μA/m	Decibels above one microamp per meter
dB_μV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

1.1 Purpose of Test

An EMC evaluation was performed to determine compliance of the Nexxiot Inc Globehopper Crossmodal 3.0, with the requirements of Part 22 Subpart H and Part 24 Subpart E. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Globehopper Crossmodal 3.0. Nexxiot Inc should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Globehopper Crossmodal 3.0, has been **permanently** discontinued.

1.2 Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 22 Subpart H and Part 24 Subpart E, in accordance with Nexxiot Inc, purchase order number PO00435.

FCC Reference	Description	Compliance
§2.1049; §22.917; §24.232(d)	Occupied Bandwidth	Data valid from module original certification FCC ID: XPYUBX18ZO01
§2.1049, §22.355, §24.238	Frequency stability	Data valid from module original certification FCC ID: XPYUBX18ZO01
§22.913(d), §24.323(d)	Peak to Average Ratio	Data valid from module original certification FCC ID: XPYUBX18ZO01
§2.1051; §22.917, §24.238	Conducted Spurious Emissions at Antenna Terminals and Band Edge	Data valid from module original certification FCC ID: XPYUBX18ZO01
§2.1046; §22.913(a); §24.232	RF Power Output	Data valid from module original certification FCC ID: XPYUBX18ZO01
§2.1046; §22.913(a)(2); §24.232	Effective Radiated Power	Compliant
§2.1053; §22.917(a), §24.238	Radiated Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Compliance Testing

Rationale: Per KDB KDB 996369 D04 “Modular Transmitter Integration Guide – Guidance for Host Product Manufacturers” only worst-case radiated measurements are reported in this filing.

II. Equipment Configuration

2.1 Overview

Eurofins E&E North America was contracted by Nexxiot Inc to perform testing on the Globehopper Crossmodal 3.0 under Nexxiot Inc's purchase order number PO00435.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Nexxiot Inc, Globehopper Crossmodal 3.0.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Globehopper Crossmodal 3.0			
Model(s) Covered:	Globehopper Crossmodal 3.0			
Filing Status:	Original			
EUT Specifications:	Primary Power: 2.4VDC (Battery Operated)			
	FCC ID: 2AXRX-AX3A			
	Module Original Report Number(s): Part 22: Report#: EMC_CTSMC-003-18001_FCC_22_Rev_2 Part 24: Report#: EMC_CTSMC-003-18001_FCC_24_Rev_1			
	Type of Modulations:	GMSK, 8PSK, QPSK, 16QAM		
	Equipment Code:	PCB		
	Technology	TX Frequency Range	(Measured) Power Output	(Rated) Power Output
	GSM 850	824 – 849 MHz	32.14 dBm ERP	33.79 dBm ERP
	GSM 1900	1850 – 1910 MHz	30.13 dBm EIRP	31.21 dBm EIRP
	LTE CAT-M1 Band 2	1850 – 1910 MHz	25.32 dBm EIRP	26.51 dBm EIRP
	LTE CAT-M1 Band 5	824 – 849 MHz	25.07 dBm ERP	25.84 dBm ERP
Analysis:	The results obtained relate only to the item(s) tested.			
Environmental Test Conditions:	Temperature: 15-35° C			
	Relative Humidity: 30-60%			
	Barometric Pressure: 860-1060 mbar			
Evaluated by:	Arsalan Hasan			
Date(s):	January 10, 2021			

Table 2. EUT Summary Table

2.2 References

CFR 47, Part 22, Subpart H	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 22: Rules and Regulations for Cellular Devices.
CFR 47, Part 24, Subpart E	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 24: Rules and Regulations for Personal Communications Services
KDB 996369 D04	Modular Transmitter Integration Guide – Guidance For Host Product Manufacturers
ANSI C63.4:20014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.26: 2015	Compliance Testing of Transmitters Used in Licensed Radio Services
ISO/IEC 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories
EIA/TIA-603-D-2010	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards
KDB 971168 v02r02	Measurement Guidance For Certification Of Licensed Digital Transmitters

Table 3. References

2.3 Test Site

All testing was performed at Eurofins E&E North America, 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

MET Laboratories is a ISO/IEC 17025 accredited site by A2LA, California #0591.02.

2.4 Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.32 dB	2	95%
RF Power Conducted Spurious Emissions	±2.25 dB	2	95%
RF Power Radiated Emissions	±3.01 dB	2	95%
Radiated Emissions, (30 MHz – 1 GHz)	±3.24	2	95%
Radiated Emissions, (1 - 25 GHz)	±3.92	2	95%
Conducted Emission	±3.53	2	95%
CEV Telecom Port	±2.44	2	95%

Table 4. Uncertainty Calculations Summary

2.5 Description of Test Sample

The Nexxiot Inc GLOBEHOPPER Crossmodal 3.0 is a zero-maintenance hardware unit for enabling real-time monitoring of non-powered rail cars. Device installation can be done in under 2 minutes ensuring quick and effortless onboarding. Once set up, the Crossmodal device provides real-time updates of location, utilization and sensor readings as often as every 5 minutes. Intelligent energy harvesting, and energy management techniques ensures a hassle-free operation for a guaranteed time of 6 years.

2.6 Equipment Configuration

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Revision
	NA	Telemetry Device	Globehopper Crossmodal 3.0	NA	NA	NA

Table 5: Equipment Configuration

2.7 Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
	Laptop with Windows 10	HP	NA	N/A

Table 6: Support Equipment

2.8 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
	NA	NA	NA	NA	NA	NA	NA

Table 7: Ports and Cabling Information

2.9 Mode of Operation During Testing

Standard test mode was used. Allows independent activation of all radios in their various test modes, as well as methods to generate traffic similar to normal operation on all digital busses.

The GLOBEHOPPER Crossmodal 3.0 was paired with CMW500 and the callbox on screen indication was used to monitor proper connection.

2.10 Method of Monitoring EUT Operation

The signal will be displayed on a spectrum analyzer.

2.11 Modifications

2.11.1 Modifications to EUT

No modifications were made to the EUT.

2.11.2 Modifications to Test Standard

No modifications were made to the test standard.

2.12 Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Nexxiot Inc upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1046 Radiated Output Power

- Test Requirements:**
- § 22.913(a)(2): Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
- § 24.232 (c): Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

Test Procedures: The EUT was tested according to the average power integration procedures of ANSI C63.26 (2015) 5.5.3.

Radiated measurements shall be performed using the test arrangement shown in Figure . After a direct field strength measurement of the maximum emission amplitude level (maximized as described previously), a signal generator and transmit antenna are substituted in place of the EUT, as shown in Figure 7. The output power of the signal generator is adjusted to replicate the maximized signal amplitude measured in the direct field strength measurement. The signal generator power setting is then used to determine the ERP or EIRP of the EUT spurious emission(s). These measurements shall be performed in accordance with the common requirements specified in 5.5.2 and the specific requirements provided in this subclause.

A step-by-step procedure is as follows.

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution a antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

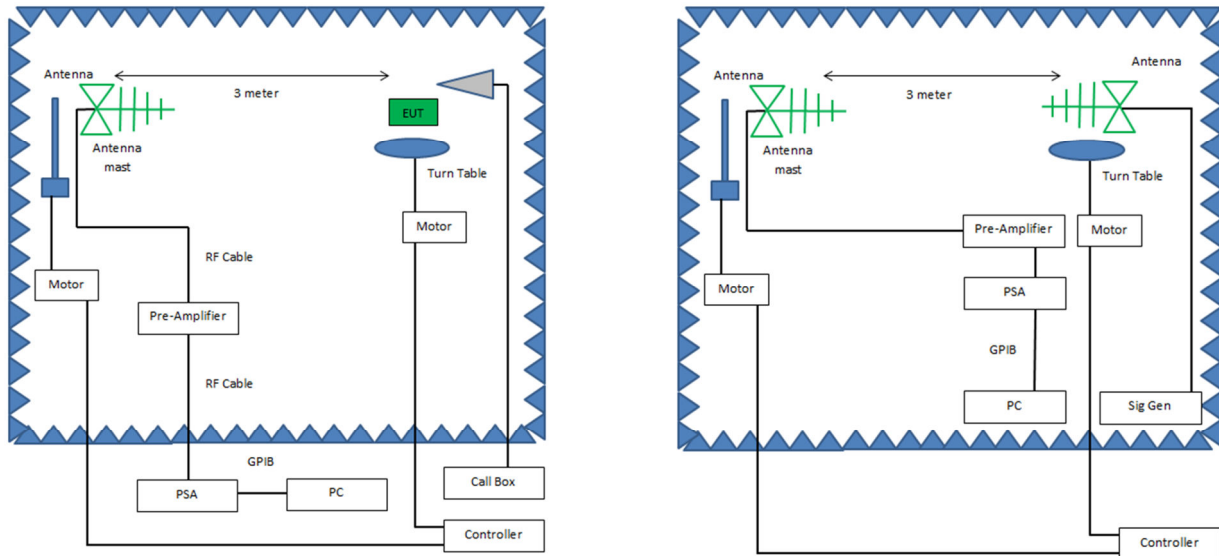


Figure 2. ERP / EIRP, Block Diagram, Test Setup Below 1GHz

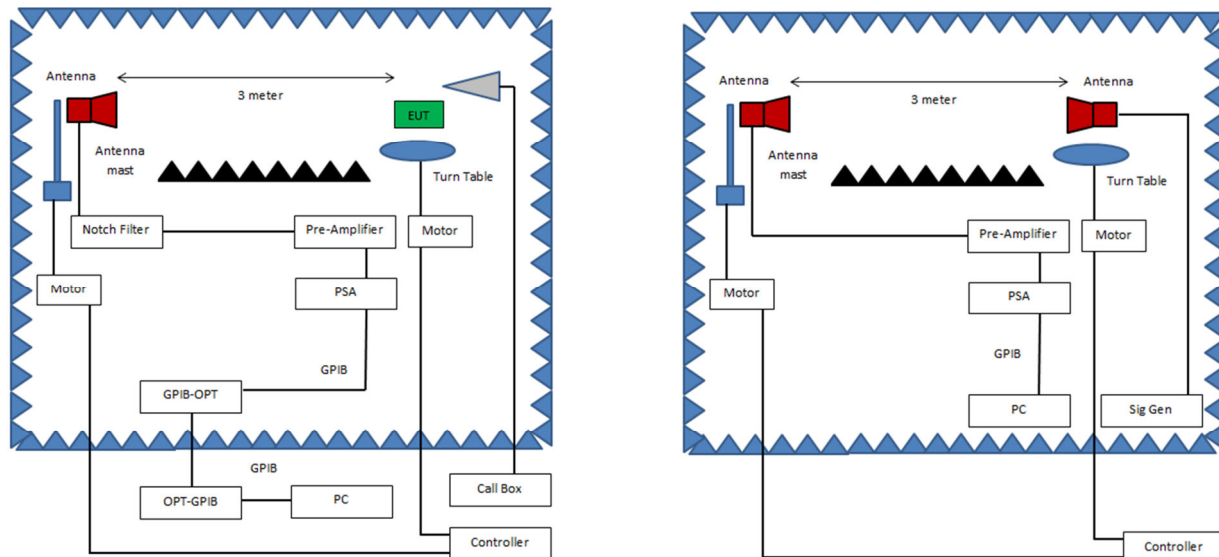


Figure 3. ERP / EIRP, Block Diagram, Test Setup Above 1GHz

- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

P_e = equivalent emission power in dBm

P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
 $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information

Test Results: The EUT was found compliant with the requirements of this section.

Test Engineer(s): Felix Huang

Test Date(s): 12/20/2020

Test Results

GSM 850	Conducted Power (dBm)		
	Channel 128	Channel 190	Channel 251
	824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GPRS (GMSK)	32.08	32.08	31.89
EGPRS (8PSK)	25.39	25.57	25.49

Table 8. Module Original Conducted Powers from Module Report EMC_CTSMC-003-18001_FCC_22_Rev_2

Note:

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

Mode	Freq. (MHz)	SG (dBm)	CL (dB)	AG (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
GSM 850 – GPRS (GMSK)	836.6	31.68	0.89	3.5	Vertical	32.14	38.45	6.31
GSM 850 – EGPRS (8PSK)	836.6	25.87	0.89	3.5	Vertical	26.33	38.45	12.12

Table 9. ERP, Test Results, Part 22, GSM 850

Note:

EIRP = SG – CL + AG
ERP = EIRP – 2.15

Mode	Type	Frequency (MHz)	RB#	Conducted Power (dBm)	
				QPSK	16QAM
Band 5	CAT M1	824.7	6	19.61	19.78
			1	24.13	23.41
		836.5	6	19.76	19.91
			1	23.98	23.35
		848.3	6	19.76	19.89
			1	24.06	23.39

Table 10. Module Original Conducted Powers from Module Report EMC_CTSMC-003-18001_FCC_22_Rev_2

Note:

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

Mode	Freq. (MHz)	SG (dBm)	CL (dB)	AG (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
LTE Band 5 CAT M1 QPSK	824.7	24.56	0.84	3.5	Vertical	25.07	38.45	13.38
LTE Band 5 CAT M1 16QAM	824.7	24.89	0.84	3.5	Vertical	24.40	38.45	14.05

Table 11. ERP, Test Results, Part 22, LTE Band 5

Note:

$$EIRP = SG - CL + AG$$

$$ERP = EIRP - 2.15$$

GSM 1900	Conducted Power (dBm)		
	Channel 512	Channel 661	Channel 810
	1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)
GPRS (GMSK)	28.89	28.55	28.19
EGPRS (8PSK)	24.78	24.62	24.44

Table 12. Module Original Conducted Powers from Module Report EMC_CTSMC-003-18001_FCC_24_Rev_1

Note:

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

Mode	Freq. (MHz)	SG (dBm)	CL (dB)	AG (dBi)	Ant. Pol.	EIRP Level (dBm)	Limit (dBm)	Margin
GSM 1900 – GPRS (GMSK)	1850.2	1.05	1.33	30.413	Vertical	30.13	33	2.87
GSM 1900 - EGPRS (8PSK)	1850.2	0.54	1.33	30.413	Vertical	29.62	33	3.38

Table 13. EIRP, Test Results, Part 24, GSM 1900

Note:

EIRP = SG – CL + AG
ERP = EIRP – 2.15

Mode	Type	Frequency (MHz)	RB#	Conducted Power (dBm)	
				QPSK	16QAM
Band 2	CAT M1	1850.7	6	21.78	21.85
			1	24.19	23.51
		1880	6	21.54	21.61
			1	23.69	23.16
		1909.3	6	20.85	20.98
			1	23.00	22.40

Table 14. Module Original Conducted Powers from Module Report EMC_CTSMC-003-18001_FCC_24_Rev_1

Note:

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

Mode	Freq. (MHz)	SG (dBm)	CL (dB)	AG (dBi)	Ant. Pol.	EIRP Level (dBm)	Limit (dBm)	Margin
LTE Band 2 CAT M1 QPSK	1850.7	-3.76	1.33	30.413	Vertical	25.32	33	7.68
LTE Band 2 CAT M1 16QAM	1850.7	-4.32	1.33	30.413	Vertical	24.76	33	8.24

Table 15. EIRP, Test Results, Part 24, LTE Band 2

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1053 Radiated Spurious Emissions

Test Requirement(s): § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

§ 22.917 Emission limitations Cellular equipment: The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

§ 22.917 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$. Limit is -13 dBm.

§ 24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. Limit is -13 dBm.

Test Procedures: The EUT was tested according to the average power integration procedures of ANSI C63.26 (2015) 5.5.3.

Radiated measurements shall be performed using the test arrangement shown in Figure. After a direct field strength measurement of the maximum emission amplitude level (maximized as described previously), a signal generator and transmit antenna are substituted in place of the EUT, as shown in Figure 7. The output power of the signal generator is adjusted to replicate the maximized signal amplitude measured in the direct field strength measurement. The signal generator power setting is then used to determine the ERP or EIRP of the EUT spurious emission(s). These measurements shall be performed in accordance with the common requirements specified in 5.5.2 and the specific requirements provided in this subclause.

A step-by-step procedure is as follows.

- k)** Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- l)** Each emission under consideration shall be evaluated:
 - 6) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 7) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 8) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 9) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 10) Record the measured emission amplitude level and frequency using the appropriate RBW.
- m)** Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- n)** Set-up the substitution measurement with the reference point of the substitution a antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

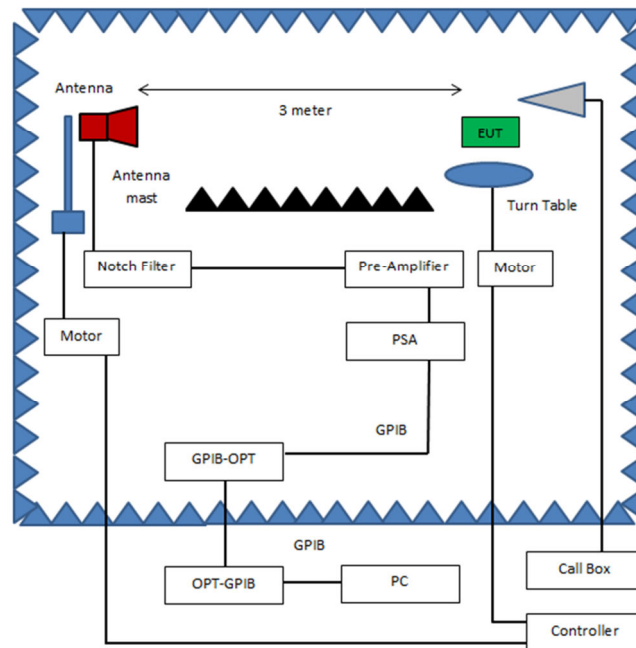


Figure 4. Radiated Spurious Emissions, Block Diagram, Test Setup

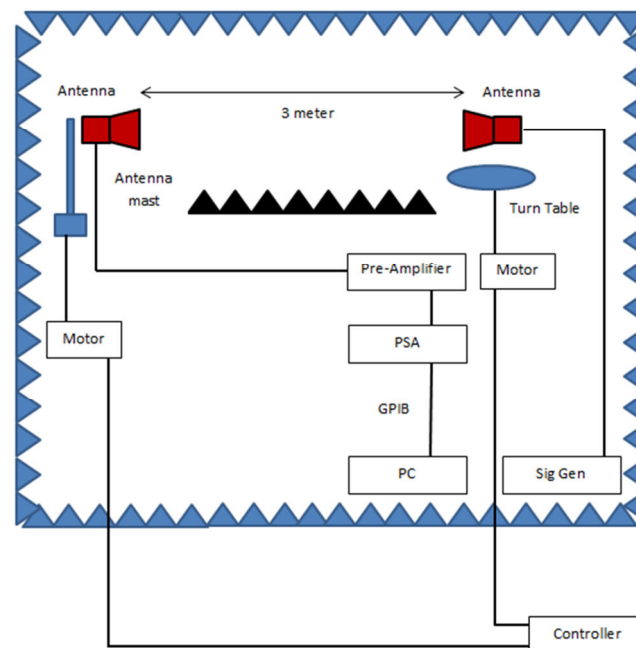


Figure 5. Radiated Spurious Emissions, Block Diagram, Test Setup

- o) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- p) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- q) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 4) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 5) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 6) Record the output power level of the signal generator when equivalence is achieved in step 2).
- r) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- s) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

P_e = equivalent emission power in dBm

P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

- t) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information

Test Results: The EUT was found compliant with the requirements of this section.

Measurements were made in each configuration. Data is presented for the worse case configuration.

Test Engineer(s): Felix Huang

Test Date(s): 12/22/2020

Radiated Spurious Emissions Test Results,

GSM 850 – GPRS (GMSK)								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	1672	-89	1.25	28.65	Vertical	-63.75	-13	50.75
3	2508	-88	1.53	32.11	Vertical	-59.57	-13	46.57
4	3344	-87	1.77	32.71	Vertical	-58.21	-13	45.21
5	4180	-85	2.00	33.24	Vertical	-55.91	-13	42.91
6	5016	-84	2.37	33.94	Vertical	-54.58	-13	41.58
7	5852	-83	2.72	34.79	Vertical	-53.08	-13	40.08
8	6688	-82	2.88	35.44	Vertical	-51.59	-13	38.59
9	7524	-81	3.22	35.63	Vertical	-50.74	-13	37.74
10	8360	-81	3.45	36.85	Vertical	-49.75	-13	36.75

Table 16. Radiated Spurious Emissions, Test Results, Part 22, GSM 850

GSM 850 – EGPRS (8PSK)								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	1672	-91	1.25	28.65	Vertical	-65.75	-13	52.75
3	2508	-90	1.53	32.11	Vertical	-61.57	-13	48.57
4	3344	-89	1.77	32.71	Vertical	-60.21	-13	47.21
5	4180	-88	2.00	33.24	Vertical	-58.91	-13	45.91
6	5016	-87	2.37	33.94	Vertical	-57.58	-13	44.58
7	5852	-86	2.72	34.79	Vertical	-56.08	-13	43.08
8	6688	-85	2.88	35.44	Vertical	-54.59	-13	41.59
9	7524	-84	3.22	35.63	Vertical	-53.74	-13	40.74
10	8360	-83	3.45	36.85	Vertical	-51.75	-13	38.75

Table 17. Radiated Spurious Emissions, Test Results, Part 22, GSM 850

Note :

EIRP = SG – CL + AG
ERP = EIRP – 2.15

LTE Band 5 - QPSK								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	1650	-90	1.24	28.44	Vertical	-64.95	-13	51.95
3	2475	-89	1.52	32.05	Vertical	-60.62	-13	47.62
4	3300	-88	1.83	32.76	Vertical	-59.22	-13	46.22
5	4125	-87	2.00	33.05	Vertical	-58.09	-13	45.09
6	4950	-86	2.40	33.84	Vertical	-56.71	-13	43.71
7	5775	-85	2.62	34.76	Vertical	-55.01	-13	42.01
8	6600	-84	2.82	35.45	Vertical	-53.52	-13	40.52
9	7425	-83	3.11	35.64	Vertical	-52.62	-13	39.62
10	8250	-82	3.34	36.12	Vertical	-49.22	-13	36.22

Table 18. Radiated Spurious Emissions, Test Results, Part 22, LTE Band 5

LTE Band 5 – 16QAM								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	1650	-92	1.24	28.44	Vertical	-66.95	-13	53.95
3	2475	-91	1.52	32.05	Vertical	-62.62	-13	49.62
4	3300	-90	1.83	32.76	Vertical	-61.22	-13	48.22
5	4125	-89	2.00	33.05	Vertical	-60.09	-13	47.09
6	4950	-88	2.40	33.84	Vertical	-58.71	-13	45.71
7	5775	-87	2.62	34.76	Vertical	-57.01	-13	44.01
8	6600	-86	2.82	35.45	Vertical	-55.52	-13	42.52
9	7425	-85	3.11	35.64	Vertical	-54.62	-13	41.62
10	8250	-84	3.34	36.12	Vertical	-51.22	-13	38.22

Table 19. Radiated Spurious Emissions, Test Results, Part 22, LTE Band 5

Note :

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

GSM 1900 – GPRS (GMSK)								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	EIRP Level (dBm)	Limit (dBm)	Margin
2	3700	-89	1.89	33.05	Vertical	-59.99	-13	46.99
3	5550	-87	2.50	34.44	Vertical	-57.22	-13	44.22
4	7400	-86	3.29	35.58	Vertical	-55.86	-13	42.86
5	9250	-85	3.74	36.22	Vertical	-54.67	-13	41.67
6	11100	-84	3.90	37.73	Vertical	-52.32	-13	39.32
7	12950	-83	4.75	39.04	Vertical	-50.86	-13	37.86
8	14800	-82	4.52	39.73	Vertical	-48.94	-13	35.94
9	16650	-81	5.00	41.66	Vertical	-46.50	-13	33.50
10	18500	x	x	x	x	x	x	x

Table 20. Radiated Spurious Emissions, Test Results, Part 24, GSM 1900

GSM 1900 – EGPRS (8PSK)								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	EIRP Level (dBm)	Limit (dBm)	Margin
2	3700	-90	1.89	33.05	Vertical	-60.99	-13	47.99
3	5550	-89	2.50	34.44	Vertical	-59.22	-13	46.22
4	7400	-87	3.29	35.58	Vertical	-56.86	-13	43.86
5	9250	-86	3.74	36.22	Vertical	-55.67	-13	42.67
6	11100	-85	3.90	37.73	Vertical	-53.32	-13	40.32
7	12950	-84	4.75	39.04	Vertical	-51.86	-13	38.86
8	14800	-83	4.52	39.73	Vertical	-49.94	-13	36.94
9	16650	-82	5.00	41.66	Vertical	-47.50	-13	34.50
10	18500	x	x	x	x	x	x	x

Table 21. Radiated Spurious Emissions, Test Results, Part 24, GSM 1900

Note :

EIRP = SG – CL + AG
ERP = EIRP – 2.15

LTE Band 2 - QPSK								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	EIRP Level (dBm)	Limit (dBm)	Margin
2	3702	-88	1.89	33.06	Vertical	-58.98	-13	45.98
3	5553	-87	2.52	34.44	Vertical	-57.23	-13	44.23
4	7404	-86	3.23	35.59	Vertical	-55.79	-13	42.79
5	9255	-85	3.71	36.22	Vertical	-54.64	-13	41.64
6	11106	-84	3.94	37.73	Vertical	-52.36	-13	39.36
7	12957	-83	4.75	39.04	Vertical	-50.86	-13	37.86
8	14808	-82	4.51	39.73	Vertical	-48.93	-13	35.93
9	16659	-81	5.04	41.66	Vertical	-46.53	-13	33.53
10	18500	x	x	x	x	x	x	x

Table 22. Radiated Spurious Emissions, Test Results, Part 24, LTE Band 2

LTE Band 2 – 16QAM								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	EIRP Level (dBm)	Limit (dBm)	Margin
2	3702	-90	1.89	33.06	Vertical	-60.98	-13	47.98
3	5553	-89	2.52	34.44	Vertical	-59.23	-13	46.23
4	7404	-88	3.23	35.59	Vertical	-57.79	-13	44.79
5	9255	-87	3.71	36.22	Vertical	-56.64	-13	43.64
6	11106	-86	3.94	37.73	Vertical	-54.36	-13	41.36
7	12957	-85	4.75	39.04	Vertical	-52.86	-13	39.86
8	14808	-84	4.51	39.73	Vertical	-50.93	-13	37.93
9	16659	-83	5.04	41.66	Vertical	-48.53	-13	35.53
10	18500	x	x	x	x	x	x	x

Table 23. Radiated Spurious Emissions, Test Results, Part 24, LTE Band 2

Note :

$EIRP = SG - CL + AG$
 $ERP = EIRP - 2.15$

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S4075	RADIO COMMUNICATION TESTER	ROHDE & SCHWARZ	CMW500	09/20/2020	09/20/2022
1S2399	TURNTABLE/MAST CONTROLLER	SUNOL SCIENCES	SC99V	SEE NOTE 1	
1S2600	BILOG ANTENNA	TESEQ	CBL6112D	03/19/2019	03/19/2021
1S2733	BILOG ANTENNA	TESEQ	CBL6112D	06/05/2019	06/05/2021
1S3826	DRG HORN ANTENNA	ETS-LINDGREN	3117	12/03/2020	12/03/2022
1S2198	DRG HORN ANTENNA	ETS-LINDGREN	3117	10/07/2019	10/07/2021
1S2003	PXA Signal Analyzer	Keysight	N9030B	09/15/2020	09/15/2021
1S2587	PRE AMPLIFIER	AML COMMUNICATIONS	AML0126L3801	SEE NOTE 1	
1S2653	AMPLIFIER	SONOMA INSTRUMENT	310 N	SEE NOTE 1	
1S2486	5 METER CHAMBER	PANASHIELD - ETS	5M	SEE NOTE 2	
1S3824	SIGNAL GENERATOR	ROHDE & SCHWARZ	SMA100B	11/06/2019	05/06/2021

Table 24. Test Equipment List

Note 1: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Note 2: Latest NSA and VSWR data available upon request.

End of Report